

FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2451-1, XT2451-2
FCC ID : IHDT56AP9
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Shenzhen)
1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China

Table of Contents

1. Statement of Compliance	4
2. Administration Data	6
3. Guidance Applied	6
4. Equipment Under Test (EUT) Information	7
4.1 General Information.....	7
4.2 General LTE SAR Test and Reporting Considerations	10
4.3 General 5G NR SAR Test and Reporting Considerations	14
5. Smart Transmit feature for RF Exposure compliance.....	19
6. Proximity Sensor Triggering Test.....	23
7. RF Exposure Limits.....	26
7.1 Uncontrolled Environment	26
7.2 Controlled Environment.....	26
8. Specific Absorption Rate (SAR)	27
8.1 Introduction	27
8.2 SAR Definition	27
9. System Description and Setup.....	28
9.1 E-Field Probe	29
9.2 Data Acquisition Electronics (DAE)	29
9.3 Phantom.....	30
9.4 Device Holder.....	31
10. Measurement Procedures.....	32
10.1 Spatial Peak SAR Evaluation	32
10.2 Power Reference Measurement.....	33
10.3 Area Scan.....	33
10.4 Zoom Scan.....	34
10.5 Volume Scan Procedures	34
10.6 Power Drift Monitoring	34
11. Test Equipment List	35
12. System Verification	36
12.1 Tissue Simulating Liquids.....	36
12.2 Tissue Verification	36
12.3 System Performance Check Results.....	38
13. RF Exposure Positions	41
13.1 Ear and handset reference point	41
13.2 Definition of the cheek position	42
13.3 Definition of the tilt position	43
13.4 Body Worn Accessory	44
13.5 Product Specific 10g SAR Exposure.....	45
13.6 Wireless Router.....	45
14. Conducted RF Output Power (Unit: dBm).....	46
15. Antenna Location	71
16. SAR Test Results	72
16.1 Head SAR	75
16.2 Hotspot SAR	101
16.3 Body Worn Accessory SAR.....	155
16.4 Product specific 10g SAR.....	193
16.5 Repeated SAR Measurement	213
16.6 TDD 5G NR<E Linearity Data Analysis	215
17. Simultaneous Transmission Analysis	230
17.1 5G NR + LTE + External radio (e.g: NFC) Sim-Tx analysis.....	231
17.2 MIMO SAR Test condition and verification	232
17.3 1g SAR Exposure Conditions.....	233
17.4 Product specific 10g SAR Exposure Conditions.....	233
18. Supplemental Tuner Tests Results.....	234
19. Uncertainty Assessment.....	235
20. References.....	236
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	
Appendix E. Conducted RF Output Power Table	
Appendix F. Supplemental Tuner Head & Body SAR Results	
Appendix G. Power reduction mechanism verification	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA420703	Rev. 01	Initial issue of report.	Apr. 15, 2024
FA420703	Rev. 02	Updated Pmax for WLAN MIMO in section 5.	Apr. 30, 2024

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT2451-1, XT2451-2**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.22	0.66	0.59	1.28
		GSM1900	1.03	1.08	1.09	
	WCDMA	WCDMA II	1.17	1.17	1.28	
		WCDMA IV	1.22	1.15	1.17	
		WCDMA V	0.28	1.15	1.15	
	LTE	LTE Band 25/2	1.24	1.27	1.28	
		LTE Band 66/4	1.28	1.27	1.28	
		LTE Band 26/5	0.33	1.21	1.21	
		LTE Band 7	1.06	1.21	1.21	
		LTE Band 12/17	0.25	0.92	0.88	
		LTE Band 13	0.13	0.85	0.84	
		LTE Band 14	0.30	0.95	0.90	
		LTE Band 30	1.08	1.27	1.28	
		LTE Band 71	0.22	0.96	0.66	
		LTE Band 41/38	1.25	1.22	1.28	
		LTE Band 48	1.26	1.28	1.25	
	5G NR	FR1 n25/2	1.23	1.21	1.22	
		FR1 n26/5	0.16	0.91	0.91	
		FR1 n7	1.27	1.22	1.22	
		FR1 n12	0.19	0.62	0.55	
		FR1 n14	0.14	0.66	0.54	
		FR1 n30	1.22	1.27	1.24	
		FR1 n66	1.14	1.27	1.27	
		FR1 n70	1.20	1.23	1.25	
		FR1 n71	0.20	0.68	0.65	
		FR1 n41/38	1.27	1.26	1.25	
		FR1 n48	1.21	1.28	1.22	
		FR1 n77/78	1.28	1.17	1.23	
DTS	WLAN	2.4GHz WLAN	1.19	1.19	1.19	1.28
NII		5GHz WLAN	1.17	1.19	1.17	1.28
DSS	Bluetooth	2.4GHz Bluetooth	1.22	1.27	1.11	1.28

Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM1900	1.13	3.21
	WCDMA	WCDMA II	2.95	
		WCDMA IV	2.40	
	LTE	LTE Band 25/2	2.79	
		LTE Band 66/4	3.04	
		LTE Band 7	3.05	
		LTE Band 30	3.18	
		LTE Band 41/38	3.13	
		LTE Band 48	2.91	
	5G NR	FR1 n25/2	2.96	
		FR1 n7	3.16	
		FR1 n30	2.93	
		FR1 n66	3.05	
		FR1 n70	3.19	
		FR1 n41/38	2.96	
		FR1 n48	3.02	
		FR1 n77/78	3.05	
DTS	WLAN	2.4GHz WLAN	2.81	3.21
NII		5GHz WLAN	3.19	3.21
DSS	Bluetooth	2.4GHz Bluetooth	2.52	3.21
Date of Testing:			2024/2/8 ~ 2024/3/31	

Remark:

- This device supports LTE B2 / B4 / B5 / B17 / B38 and B25 / B66 / B26 / B12 / B41. Since the supported frequency span for LTE B2 / B4 / B5 / B17 / B38 falls completely within the supports frequency span for LTE B25 / B66 / B26 / B12 / B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B25 / B66 / B26 / B12 / B41.
- This device supports 5GNR n2/n5/n38/n78 and n25/n26/n41/n77. Since the supported frequency span for 5GNR n2/n5/n38/n78 falls completely within the supports frequency span for n25/n26/n41/n77, both 5GNR bands have the same target power, and both 5GNR bands share the same transmission path; therefore, SAR was only assessed for n25/n26/n41/n77.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Testing Laboratory			
Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR01-SZ, SAR05-SZ	CN1256	421272

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2451-1, XT2451-2
FCC ID	IHDT56AP9
IMEI Code	IMEI1: 350431590015577 IMEI2: 350431590015585
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n70 : 1695 MHz ~ 1710 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz WLAN 6GHz U-NII-5: 5925 MHz ~ 6425 MHz WLAN 6GHz U-NII-6: 6425 MHz ~ 6525 MHz WLAN 6GHz U-NII-7: 6525 MHz ~ 6875 MHz WLAN 6GHz U-NII-8: 6875 MHz ~ 7125 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz WPT: 115 kHz ~ 145 kHz
Mode	GSM/GPRS/EGPRS

	RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: CP-OFDM / DFT-s-OFDM, PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ac VHT20/VHT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 2.4GHz 802.11be EHT20/EHT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 WLAN 5GHz 802.11be EHT20/EHT40/EHT80/EHT160 WLAN 6GHz 802.11a/ax HE20/HE40/HE80/HE160 WLAN 6GHz 802.11be EHT20/EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE NFC: ASK WPT: ASK
HW Version	DVT2
SW Version	U3UX34.16
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: 1. This device supports VoIP in GPRS, EGPRS, WCDMA, LTE and 5GNR (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. 2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications. 3. This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). 4. This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 12. 5. The 2.4GHz/5GHz/6GHz WLAN can transmit in MIMO antenna mode only. 6. For dual SIM card mobile has single SIM slots + eSIM (electronic SIM) and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). 7. The device implements the power management, Hall sensor and proximity sensor /receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity) and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. Details about the power management decision and sensor detection are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E. 8. This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the GSM, WCDMA, LTE and 5GNR modes. In this report SAR was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing. The detail descriptions of the antenna tuner and supplemental data for additional information can be referred to section 18 and appendix F. 9. This device supports HPUE mode for LTE Band 41 and 5GNR n41/n77/n78 with higher power. For HPUE power is higher than power class 3 but with lower duty cycle, the maximum average power for class 2 and class 3 is almost the same, so we chose power class 3 full SAR testing and power class 2 verified the worst case of power class 3 SAR. 10. For 5GNR n41/n77/n78 HPUE, 5GNR n41/77/78 PC2 Maximum Duty Cycle is 50%, using FTM (Factory Test Mode) with 50% duty cycle is considered during SAR testing. For 5G NR other bands, using FTM to perform SAR with default 100% transmission. 11. 5G NR n2/25/66/41/48/77/78 supports UL MIMO. 12. The device supports HPUE (power class 2) under SISO mode and HPUE (power class 1.5) under UL MIMO mode for 5G NR n41/n77. 13. This device has NFC function and the NFC SAR report will be separately submitted. 14. RF exposure report for WPC (Wireless power charging) will be separately submitted. 15. SAR and Power density test report for WLAN 6GHz U-NII-5/6/7/8 will be separately submitted. About co-located SAR with WWAN/Bluetooth always chose higher SAR of WLAN5GHz U-NII-1/2A/2C/3 and WLAN 6GHz U-NII-5/6/7/8.	

16. This device supports 5G NR FR1 bands as following table, including NSA mode and SA mode. NSA and SA mode performed SAR separately.

<5G NR>

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	n2	FDD	15	5, 10, 15, 20, 25, 30, 35, 40
	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 35, 40
	n12	FDD	15	5, 10, 15
	n25	FDD	15	5, 10, 15, 20, 25, 30, 35, 40
	n26	FDD	15	5, 10, 15, 20
	n66	FDD	15	5, 10, 15, 20, 25, 30, 35, 40
	n71	FDD	15	5, 10, 15, 20
	n38	TDD	30	10, 15, 20, 25, 30, 40
	n41	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100
	n77	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100
	n78	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100
SA	n2	FDD	15	5, 10, 15, 20, 25, 30, 35, 40
	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 35, 40
	n12	FDD	15	5, 10, 15
	n14	FDD	15	5, 10
	n25	FDD	15	5, 10, 15, 20, 25, 30, 35, 40
	n26	FDD	15	5, 10, 15, 20
	n30	FDD	15	5, 10
	n66	FDD	15	5, 10, 15, 20, 25, 30, 35, 40
	n70	FDD	15	5, 10, 15
	n71	FDD	15	5, 10, 15, 20
	n38	TDD	30	10, 15, 20, 25, 30, 40
	n41	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100
	n48	TDD	30	10, 15, 20, 30, 40
	n77	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100
	n78	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05								
FCC ID	IHDT56AP9							
Equipment Name	Mobile Cellular Phone							
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz							
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz							
uplink modulations used	QPSK / 16QAM / 64QAM / 256QAM							
LTE Voice / Data requirements	Voice and Data							
LTE Release Version	R17, Cat18							
CA Support	Supported, Uplink and Downlink							
LTE MPR permanently built-in by design	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							
	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5	
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
Power reduction applied to satisfy SAR compliance	Yes, when operating in Proximity sensors/receiver/hotspot detect mechanism, head/body-worn /hotspot/extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 14.							
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 14.							
LTE Carrier Aggregation Additional Information	1. This device supports LTE Carrier Aggregation (CA) in the uplink for intra-band and inter-band with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 6 carriers in the downlink and 2 carriers in the uplink.							

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5		
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 14												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Channel #		Channel #		Freq.(MHz)					
L	23305		790.5		23330		793					
M	23330		793									
H	23355		795.5									
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		

LTE Band 30												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	27685		2307.5		27710		2310					
M	27710		2310									
H	27735		2312.5									
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 71												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	133147	665.5	133172	668	133197	670.5	133222	673				
M	133247	675.5	133272	678	133297	680.5	133322	683				
H	133447	695.5	133422	693	133397	690.5	133372	688				
LTE Band 48												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	55265	3552.5	55290	3555	55315	3557.5	55340	3560				
LM	55810	3607	55815	3607.5	55820	3608	55830	3609				
MH	56170	3643	56165	3642.5	56160	3642	56150	3641				
H	56715	3697.5	56690	3695	56665	3692.5	56640	3690				

<For LTE Overlap Bands Description>

1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 2	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 25	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 66	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 5	Yes	Yes	Yes	Yes		
LTE Band 26	Yes	Yes	Yes	Yes	Yes	
LTE Band 12	Yes	Yes	Yes	Yes		
LTE Band 17			Yes	Yes		
LTE Band 38			Yes	Yes	Yes	Yes
LTE Band 41			Yes	Yes	Yes	Yes



2) LTE Bands tune up

Band	Antenna	Default (DSI4)	DSI 2	DSI 7	DSI 11	DSI 3	DSI 5	DSI 6	DSI 9	DSI 10	DSI 12
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
LTE Band 2	Ant 0	24.0	24.0	23.5	24.0	24.0	24.0	24.0	24.0	24.0	24.0
LTE Band 25		24.0	24.0	23.5	24.0	24.0	24.0	24.0	24.0	24.0	24.0
LTE Band 2	Ant 1	24.0	24.0	22.1	24.0	22.1		24.0	24.0	24.0	24.0
LTE Band 25		24.0	24.0	22.1	24.0	22.1		24.0	24.0	24.0	24.0
LTE Band 2	Ant 2	24.0	18.5	18.5	18.1	20.5	24.0	24.0		21.5	24.0
LTE Band 25		24.0	18.5	18.5	18.1	20.5	24.0	24.0		21.5	24.0
LTE Band 2	Ant 3	24.0	19.5	20.8	21.3	22.2	24.0			23.4	
LTE Band 25		24.0	19.5	20.8	21.3	22.2	24.0			23.4	
LTE Band 4	Ant 0	24.0	24.0	21.5	23.4	23.0		24.0	24.0	24.0	
LTE Band 66		24.0	24.0	21.5	23.4	23.0		24.0	24.0	24.0	
LTE Band 4	Ant 1	24.0	24.0	23.1	23.4	22.1		24.0	24.0	23.4	
LTE Band 66		24.0	24.0	23.1	23.4	22.1		24.0	24.0	23.4	
LTE Band 4	Ant 2	24.0	18.8	20.2	20.9	21.7	24.0	24.0		24.0	24.0
LTE Band 66		24.0	18.8	20.2	20.9	21.7	24.0	24.0		24.0	24.0
LTE Band 4	Ant 3	24.0	19.8	22.0	22.0	23.2	24.0			24.0	
LTE Band 66		24.0	19.8	22.0	22.0	23.2	24.0			24.0	
LTE Band 5	Ant 0	24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
LTE Band 26		24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
LTE Band 5	Ant 1	24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
LTE Band 26		24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
LTE Band 12	Ant 0	24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
LTE Band 17		24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
LTE Band 12	Ant 1	24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
LTE Band 17		24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
LTE Band 38 PC3	Ant 0	24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
LTE Band 41 PC3		24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
LTE Band 38 PC3	Ant 1	24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
LTE Band 41 PC3		24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
LTE Band 38 PC3	Ant 2	24.0	18.8	21.9	20.6	21.2	24.0	24.0		23.1	24.0
LTE Band 41 PC3		24.0	18.8	21.9	20.6	21.2	24.0	24.0		23.1	24.0
LTE Band 38 PC3	Ant 3	24.0	16.8	17.6	18.9	20.8	22.6			22.0	23.5
LTE Band 41 PC3		24.0	16.8	17.6	18.9	20.8	22.6			22.0	23.5

4.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information																
Operating Frequency Range of each 5G NR transmission band	5G NR n2: 1850 MHz ~ 1910 MHz															
	5G NR n5: 824 MHz ~ 849 MHz															
	5G NR n7: 2500 MHz ~ 2570 MHz															
	5G NR n12: 699 MHz ~ 716 MHz															
	5G NR n14: 788 MHz ~ 798 MHz															
	5G NR n25: 1850 MHz ~ 1915 MHz															
	5G NR n26: 814 MHz ~ 849 MHz															
	5G NR n30: 2305 MHz ~ 2315 MHz															
	5G NR n66: 1710 MHz ~ 1780 MHz															
	5G NR n70: 1695 MHz ~ 1710 MHz															
	5G NR n71: 663 MHz ~ 698 MHz															
	5G NR n38: 2570 MHz ~ 2620 MHz															
	5G NR n41: 2496 MHz ~ 2690 MHz															
	5G NR n48: 3550 MHz ~ 3700 MHz															
	5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz															
	5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz															
Channel Bandwidth	The detail please refers to section 4.1 5GNR FR1 bands table.															
SCS	FDD: SCS15KHz, TDD: SCS30KHz															
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM															
A-MPR (Additional MPR) disabled for SAR Testing?	Yes															
LTE Anchor Bands for n2	LTE B4/5/7/12/13/14/30/48/66/71															
LTE Anchor Bands for n5	LTE B2/7/30/66/48															
LTE Anchor Bands for n7	LTE B2/4/5/12/66															
LTE Anchor Bands for n12	LTE B2/66															
LTE Anchor Bands for n25	LTE B7/12/26/66															
LTE Anchor Bands for n26	LTE B7															
LTE Anchor Bands for n38	LTE B2/4/5/12/66															
LTE Anchor Bands for n41	LTE B2/4/5/12/25/26/66/71															
LTE Anchor Bands for n66	LTE B2/5/7/12/13/14/30/48/71															
LTE Anchor Bands for n71	LTE B2/7/66/48															
LTE Anchor Bands for n77	LTE B2/5/7/12/13/14/25/30/66/41/71															
LTE Anchor Bands for n78	LTE B2/4/5/7/12/13/25/26/66/71/38/41															

Transmission (H, M, L) channel numbers and frequencies in each 5G NR band																
NR Band 2																
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 35MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860	372500	1862.5	373000	1865	373500	1867.5	374000	1870
M	376000	1880	376000	1880	376000	1880	376000	1880	376000	1880	376000	1880	376000	1880	376000	1880
H	381500	1907.5	381000	1905	380500	1902.5	380000	1900	379500	1897.5	379000	1895	378500	1892.5	378000	1890

NR Band 5								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 7																
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 35MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500500	2502.5	501000	2505	501500	2507.5	502000	2510	502500	2512.5	503000	2515	503500	2517.5	504000	2520
M	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535
H	513500	2567.5	513000	2565	512500	2562.5	512000	2560	511500	2557.5	511000	2555	510500	2552.5	510000	2550

NR Band 12						
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	140300	701.5	140800	704	141300	706.5
M	141500	707.5	141500	707.5	141500	707.5
H	142700	713.5	142200	711	141700	708.5



NR Band 14					
Bandwidth 5MHz			Bandwidth 10MHz		
	Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)
L	158100	790.5	158600	793	
M	158600	793			
H	159100	795.5			

NR Band 25																
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 35MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860	372500	1862.5	373000	1865	373500	1867.5	374000	1870
M	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5
H	382500	1912.5	382000	1910	381500	1907.5	381000	1905	380500	1902.5	380000	1900	379500	1897.5	379000	1895

NR Band 26								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	163300	816.5	163800	819	164300	821.5	164800	824
M	166300	831.5	166300	831.5	166300	831.5	166300	831.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 30					
Bandwidth 5MHz			Bandwidth 10MHz		
	Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)
L	461500	2307.5	462000	2310	
M	462000	2310			
H	462500	2312.5			

NR Band 66																
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 35MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	342500	1712.5	343000	1715	343500	1717.5	344000	1720	344500	1722.5	345000	1725	345500	1727.5	346000	1730
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745
H	355500	1777.5	355000	1775	354500	1772.5	354000	1770	353500	1767.5	353000	1765	352500	1762.5	352000	1760

NR Band 70						
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	339500	1697.5	340000	1700	340500	1702.5
M	340500	1702.5	340500	1702.5		
H	341500	1707.5	341000	1705		

NR Band 71								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	133100	665.5	133600	668	134100	670.5	134600	673
M	136100	680.5	136100	680.5	136100	680.5	136100	680.5
H	139100	695.5	138600	693	138100	690.5	137600	688

NR Band 38												
	Bandwidth10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	515004	2575.02	515502	2577.51	516000	2580	516504	2582.52	517002	2585.01	518004	2590.02
M	519000	2595	519000	2595	519000	2595	519000	2595	519000	2595	519000	2595
H	522996	2614.98	522498	2612.49	522000	2610	521496	2607.48	520998	2604.99	519996	2599.98

NR Band 41																							
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L 500202	2501.01	500700	2503.5	501204	2506.02	501702	2508.51	502200	2511	503202	2516.01	504204	2521.02	505200	2526	500202	2501.01	507204	2536.02	508200	2541	509202	2546.01
M 518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99
H 537000	2685	536496	2682.48	535998	2679.99	535500	2677.5	534996	2674.98	534000	2670	532998	2664.99	531996	2659.98	537000	2685	529998	2649.99	528996	2644.98	528000	2640



NR Band 48									
Bandwidth 10MHz		Bandwidth15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L 637000	3555	637168	3557.52	637334	3560.01	637668	3565.02	638000	3570
M 641666	3624.99	641666	3624.99	641666	3624.99	641666	3624.99	641666	3624.99
H 646332	3694.98	646166	3692.49	646000	3690	645666	3684.99	645332	3679.98

NR Band 77																							
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L 647000	3705	647168	3707.52	647334	3710.01	647500	3712.5	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02	650000	3750
M 656000	3840	656000	3840	656000	3840	656000	3840.00	656000	3840.00	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840
H 665000	3975	664832	3972.48	664666	3969.99	664500	3967.50	664332	3964.98	664000	3960	663666	3954.99	663332	3949.98	663000	3945	662666	3939.99	662332	3934.98	662000	3930

NR Band 78																							
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L 647000	3705	647168	3707.52	647334	3710.01	647500	3712.5	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02		
M 650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750
H 653000	3795	652832	3792.48	652666	3789.99	652500	3787.5	652332	3784.98	652000	3780	651666	3774.99	651332	3769.98	651000	3765	650666	3759.99	650332	3754.98		

For <3450 MHz ~ 3550 MHz >

NR Band 77																							
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L 630334	3455.01	630500	3457.5	630668	3460.02	630834	3462.51	631000	3465	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495		
M 633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98
H 636332	3544.98	636166	3542.49	636000	3540	635832	3537.48	635666	3534.99	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99		

NR Band 78																							
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L 630334	3455.01	630500	3457.5	630668	3460.02	630834	3462.51	631000	3465	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495		
M 633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98
H 636332	3544.98	636166	3542.49	636000	3540	635832	3537.48	635666	3534.99	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99		

<For NR Overlap Bands Description>

1) NR Bands BW

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
FR1 NR	n2	FDD	15	5,10,15,20,25,30,35,40
	n25	FDD	15	5,10,15,20,25,30,35,40
	n5	FDD	15	5,10,15,20
	n26	FDD	15	5,10,15,20
	n38	TDD	30	10,15,20,25,30,40
	n41	TDD	30	10,15,20,25,30,40,50,60,70,80,90,100
	n77	TDD	30	10,15,20,25,30,40,50,60,70,80,90,100
	n78	TDD	30	10,15,20,25,30,40,50,60,70,80,90,100



2) NR Bands SA Tune up:

Band	Antenna	Default (DSI4)	DSI 2	DSI 7	DSI 11	DSI 3	DSI 5	DSI 6	DSI 9	DSI 10	DSI 12
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
n2	Ant 0	24.0	24.0	21.5	24.0	23.0		24.0	24.0	24.0	
n25		24.0	24.0	21.5	24.0	23.0		24.0	24.0	24.0	
n2	Ant 1	24.0	24.0	21.0	22.5	22.0		24.0	24.0	24.0	
n25		24.0	24.0	21.0	22.5	22.0		24.0	24.0	24.0	
n2	Ant 2	24.0	18.5	17.5	17.5	20.5	23.5	23.5		20.5	24.0
n25		24.0	18.5	17.5	17.5	20.5	23.5	23.5		20.5	24.0
n2	Ant 3	24.0	19.5	20.5	21.0	22.5	24.0			23.0	
n25		24.0	19.5	20.5	21.0	22.5	24.0			23.0	
n5	Ant 0	24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
n26		24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
n5	Ant 1	24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
n26		24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
n38 PC3	Ant 0	24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
n41 PC3		24.0	24.0	24.0	24.0	24.0		24.0	24.0	24.0	
n38 PC3	Ant 1	24.0	24.0	22.0	19.5	23.5		24.0	24.0	23.5	
n41 PC3		24.0	24.0	22.0	19.5	23.5		24.0	24.0	23.5	
n38 PC3	Ant 2	24.0	18.5	19.0	19.0	20.0	23.5	23.5		20.0	24.0
n41 PC3		24.0	18.5	19.0	19.0	20.0	23.5	23.5		20.0	24.0
n38 PC3	Ant 3	24.0	17.5	18.0	19.5	21.0	21.5			22.0	
n41 PC3		24.0	17.5	18.0	19.5	21.0	21.5			22.0	
n77 PC3	Ant 3	24.0	14.5	16.5	18.5	19.5	20.5			21.0	
n78 PC3		24.0	14.5	16.5	18.5	19.5	20.5			21.0	
n77 PC2		27.0	17.5	19.5	21.5	22.5	23.5			24.0	
n78 PC2		27.0	17.5	19.5	21.5	22.5	23.5			24.0	
n77 PC3	Ant 4	24.0	16.0	15.5	16.0	19.5	21.5	21.5		20.0	21.5
n78 PC3		24.0	16.0	15.5	16.0	19.5	21.5	21.5		20.0	21.5
n77 PC2		27.0	19.0	18.5	19.0	22.5	24.5	24.5		23.0	24.5
n78 PC2		27.0	19.0	18.5	19.0	22.5	24.5	24.5		23.0	24.5
n77 PC3	Ant 6	24.0	14.0	13.5	14.0	19.0	20.5			18.5	
n78 PC3		24.0	14.0	13.5	14.0	19.0	20.5			18.5	
n77 PC2		27.0	17.0	16.5	17.0	22.0	23.5			21.5	
n78 PC2		27.0	17.0	16.5	17.0	22.0	23.5			21.5	
n77 PC3	Ant 8	24.0	18.0	16.0	18.5	21.0	21.5	21.5		22.0	21.5
n78 PC3		24.0	18.0	16.0	18.5	21.0	21.5	21.5		22.0	21.5
n77 PC2		27.0	21.0	19.0	21.5	24.0	24.5	24.5		25.0	24.5
n78 PC2		27.0	21.0	19.0	21.5	24.0	24.5	24.5		25.0	24.5
n2	Ant 2+3	27.0	21.0	20.0	19.0	23.0	26.5	26.5		23.0	23.0
n25		27.0	21.0	20.0	19.0	23.0	26.5	26.5		23.0	23.0
n2	Ant 2+1	27.0	22.0	20.5	20.5	23.0	26.5	26.5	26.5	23.5	23.5
n25		27.0	22.0	20.5	20.5	23.0	26.5	26.5	26.5	23.5	23.5
n2	Ant 0+3	27.0	22.5	23.0	24.5	25.5	27.0	27.0	27.0	26.0	
n25		27.0	22.5	23.0	24.5	25.5	27.0	27.0	27.0	26.0	
n2	Ant 0+1	27.0	27.0	24.0	25.5	25.0		27.0	27.0	27.0	
n25		27.0	27.0	24.0	25.5	25.0		27.0	27.0	27.0	

3) NR Bands UL MIMO Tune up:

Band	Antenna	Default (DSI4)	DSI 2	DSI 7	DSI 11	DSI 3	DSI 5	DSI 6	DSI 9	DSI 10	DSI 12
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
n77 PC2	Ant 4+8	27.0	22.5	20.5	22.0	25.0	26.0	26.0		26.0	27.0
n78 PC2		27.0	22.5	20.5	22.0	25.0	26.0	26.0		26.0	27.0
n77 PC2	Ant 4+6	27.0	20.0	19.5	20.0	24.5	26.5	26.5		24.0	24.0
n78 PC2		27.0	20.0	19.5	20.0	24.5	26.5	26.5		24.0	24.0
n77 PC2	Ant 3+8	27.0	20.5	22.0	24.0	25.0	26.0	26.0		26.0	26.0
n78 PC2		27.0	20.5	22.0	24.0	25.0	26.0	26.0		26.0	26.0
n77 PC2	Ant 3+6	27.0	19.5	19.5	19.5	24.5	26.5			24.0	
n78 PC2		27.0	19.5	19.5	19.5	24.5	26.5			24.0	

5. Smart Transmit feature for RF Exposure compliance

The RF exposure limit is defined based on time-averaged RF exposure. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN and WLAN/BT transmitter to ensure the product in compliance with RF exposure limit over a defined time window. To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.

This report describes the procedures for the SAR char generation, and the parameters obtained from SAR characterization (referred to as SAR char, respectively) will be used as input for Smart Transmit. SAR char will be entered via the Embedded File System (EFS) version 21 to enable the Smart Transmit Gen1 Feature.

<Terminologies in this report>

P_{limit}	The time-averaged RF power which corresponds to SAR_design_target.
P_{max}	Maximum target power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory SAR limit to account for all device design related uncertainty.
SAR char	P _{limit} for all the technologies/bands for all applicable DSI

<SAR Characterization>

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at WWAN and WLAN/BT bands. It will then be used as input for Smart Transmit to control and manage RF exposure for WWAN and WLAN/BT bands.

<SAR design target and uncertainty>

Item	Uncertainty dB (k=2)
Total uncertainty	1.5

To account for total uncertainty, SAR_design_target should be determined as:

$$SAR_{design_target} < SAR_{regulatory_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$



The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_design_target, below the predefined time-averaged power limit, for each characterized technology and band.

Smart Transmit allows the device to transmit at higher power instantaneously, as high as Pmax, when needed, but enforces power limiting to maintain time-averaged transmit power to Plimit. Below table shows Plimit EFS settings and maximum tune up output power Pmax configured for this EUT for various transmit conditions (Device State Index DSI).

<P_{limit} for supported technologies and bands (P_{limit} in EFS file)>

Band	Antenna	Open	Open	Open	Open	Open	Open	Close	Close	Close	Sensor off	Pmax*
		DSI 2	DSI 3	DSI 5	DSI 6	DSI 7	DSI 9	DSI 10	DSI 11	DSI 12	DSI 4	Pmax*
GSM850	0	32.5	26.9		23.5	26.4	23.5	27.4	27.4		23.5	23.5
GSM850	1	31.1	27.4		23.5	27.4	23.5	28.9	28.6		23.5	23.5
GSM1900	0	33.8	23.4		20.5	23.0	20.5	20.5	23.9		20.5	20.5
GSM1900	2	18.0	20.0	25.0	25.0	17.7		24.1	17.8	25.1	20.5	20.5
WCDMA II	0	33.0	23.2		23.3	22.2	23.3	22.4	22.4		23.0	23.0
WCDMA II	2	17.9	21.1	24.3	24.3	18.7		21.5	18.5	23.1	23.0	23.0
WCDMA IV	0	33.7	22.5		24.7	20.5	24.7	23.5	22.3		23.0	23.0
WCDMA IV	2	18.3	21.1	24.2	24.2	18.8		23.6	19.5	23.2	23.0	23.0
WCDMA V	0	29.7	23.5		23.0	23.5	23.0	24.3	23.5		23.0	23.0
WCDMA V	1	31.6	25.1		23.0	25.1	23.0	27.0	26.4		23.0	23.0
LTE Band 25/2	0	35.2	23.2		23.9	22.5	23.9	24.4	24.4		23.0	23.0
LTE Band 25/2	1	32.6	21.1		23.6	21.1	23.6	23.3	23.3		23.0	23.0
LTE Band 25/2	2	17.5	19.5	23.1	23.1	17.5		20.5	17.1	23.1	23.0	23.0
LTE Band 25/2	3	18.5	21.2	24.2		19.8		22.4	20.3		23.0	23.0
LTE Band 66/4	0	35.9	22.0		24.4	20.5	24.4	24.8	22.4		23.0	23.0
LTE Band 66/4	1	31.1	21.1		24.0	22.1	24.0	22.4	22.4		23.0	23.0
LTE Band 66/4	2	17.8	20.7	24.0	24.0	19.2		23.6	19.9	23.5	23.0	23.0
LTE Band 66/4	3	18.8	22.2	23.2		21.0		23.1	21.0		23.0	23.0
LTE Band 26/5	0	28.9	23.2		23.0	23.2	23.0	23.8	23.8		23.0	23.0
LTE Band 26/5	1	31.0	24.6		23.0	24.6	23.0	25.3	25.1		23.0	23.0
LTE Band 7	0	25.8	21.2		23.5	21.2	23.5	21.3	21.3		23.0	23.0
LTE Band 7	1	29.4	20.9		22.1	19.9	22.1	20.8	20.8		23.0	23.0
LTE Band 7	2	15.4	19.2	21.7	21.7	17.7		19.0	17.6	21.7	23.0	23.0
LTE Band 7	3	16.1	20.0	19.5		16.2		19.7	18.5		23.0	23.0
LTE Band 12/17	0	30.1	24.6		23.0	24.4	23.0	25.3	25.3		23.0	23.0
LTE Band 12/17	1	30.1	25.4		23.0	24.9	23.0	26.4	25.7		23.0	23.0
LTE Band 13	0	33.1	24.8		23.0	24.8	23.0	25.0	25.0		23.0	23.0
LTE Band 13	1	33.1	25.4		23.0	24.8	23.0	25.4	25.2		23.0	23.0
LTE Band 14	0	29.3	24.6		23.0	24.3	23.0	25.2	24.3		23.0	23.0
LTE Band 14	1	29.3	25.3		23.0	25.1	23.0	25.5	25.2		23.0	23.0
LTE Band 30	0	30.7	24.1		23.0	24.1	23.0	25.8	25.8		23.0	23.0
LTE Band 30	1	34.3	22.1		22.5	20.0	22.5	21.5	20.6		23.0	23.0
LTE Band 30	2	19.3	21.8	22.5	22.5	19.4		22.5	19.6	22.2	23.0	23.0
LTE Band 30	3	17.0	20.1	22.4		18.9		21.1	20.2		23.0	23.0
LTE Band 71	0	30.8	25.9		23.0	24.3	23.0	26.6	26.6		23.0	23.0
LTE Band 71	1	32.8	26.8		23.0	25.1	23.0	26.9	26.7		23.0	23.0
LTE Band 41/38(PC3)**	0	23.9	21.7		23.2	21.7	23.2	21.7	22.4		21.0	21.0
LTE Band 41(PC2)**	0	23.9	21.7		23.2	21.7	23.2	21.7	22.4		22.4	22.4
LTE Band 41/38(PC3)**	1	29.1	21.8		22.5	20.9	22.5	21.4	21.9		21.0	21.0
LTE Band 41(PC2)**	1	29.1	21.8		22.5	20.9	22.5	21.4	21.9		22.4	22.4
LTE Band 41/38(PC3)**	2	15.8	18.2	22.4	22.4	18.9		20.1	17.6	22.4	21.0	21.0
LTE Band 41(PC2)**	2	15.8	18.2	22.4	22.4	18.9		20.1	17.6	22.4	22.4	22.4
LTE Band 41/38(PC3)**	3	13.8	17.8	19.6		14.6		19.0	15.9		21.0	21.0
LTE Band 41(PC2)**	3	13.8	17.8	19.6		14.6		19.0	15.9		22.4	22.4
LTE Band 48	3	14.1	20.0	19.5		16.0		19.9	17.5		21.0	21.0
LTE Band 48	4	14.8	18.8	19.8	19.8	14.7		20.5	16.7	20.5	21.0	21.0



FCC SAR Test Report

Report No. : FA420703

LTE Band 48	6	14.2	18.4	20.5		14.1		18.6	15.2		21.0	21.0
LTE Band 48	8	17.3	19.4	20.5	20.5	17.1		19.9	18.0	21.6	21.0	21.0
n25/2	0	35.1	22.0		25.1	20.5	25.1	23.9	23.9		23.0	23.0
n25/2	1	33.3	21.0		24.0	20.0	24.0	23.2	21.5		23.0	23.0
n25/2	2	17.5	19.5	22.5	22.5	16.5		19.5	16.5	23.3	23.0	23.0
n25/2	3	18.5	21.5	24.0		19.5		22.0	20.0		23.0	23.0
n26/5	0	31.9	24.5		23.0	24.5	23.0	26.1	26.1		23.0	23.0
n26/5	1	32.9	25.6		23.0	25.4	23.0	27.0	26.2		23.0	23.0
n7	0	28.6	23.4		24.7	23.4	24.7	23.8	23.8		23.0	23.0
n7	1	31.9	21.5		22.5	19.5	22.5	21.5	21.0		23.0	23.0
n7	2	16.0	19.5	22.5	22.5	17.5		19.5	17.0	22.0	23.0	23.0
n7	3	17.5	18.5	20.5		17.0		20.0	19.0		23.0	23.0
n12	0	31.3	26.9		23.0	26.2	23.0	26.7	26.7		23.0	23.0
n12	1	34.2	26.8		23.0	26.2	23.0	27.3	26.7		23.0	23.0
n14	0	32.5	26.8		23.0	26.2	23.0	26.8	26.8		23.0	23.0
n14	1	32.7	27.1		23.0	25.9	23.0	27.7	27.7		23.0	23.0
n30	0	31.8	24.6		23.0	23.9	23.0	25.3	25.3		23.0	23.0
n30	1	35.3	22.0		22.5	19.5	22.5	21.5	19.5		23.0	23.0
n30	2	19.0	22.5	24.2	24.2	19.5		22.0	19.0	24.0	23.0	23.0
n30	3	17.5	21.0	21.5		19.5		20.5	19.0		23.0	23.0
n66	0	34.8	23.0		26.6	20.0	26.6	24.4	22.0		23.0	23.0
n66	1	33.9	20.0		23.2	19.5	23.2	21.5	21.5		23.0	23.0
n66	2	19.5	21.0	23.7	23.7	18.5		23.1	19.5	24.3	23.0	23.0
n66	3	20.0	23.5	24.1		20.5		24.3	21.5		23.0	23.0
n70	0	35.9	25.2		26.3	22.0	26.3	25.3	23.2		23.0	23.0
n70	1	36.4	23.8		23.0	23.8	23.0	23.0	24.9		23.0	23.0
n70	2	18.5	21.0	23.0	23.0	18.0		23.1	19.0	23.7	23.0	23.0
n70	3	18.5	21.5	22.5		20.0		22.5	20.5		23.0	23.0
n71	0	31.0	26.0		23.0	25.8	23.0	27.6	27.6		23.0	23.0
n71	1	34.0	27.8		23.0	26.1	23.0	28.5	27.8		23.0	23.0
n41/38(PC3)	0	27.5	23.5		25.6	23.5	25.6	23.3	23.3		23.0	23.0
n41(PC2)	0	27.5	23.5		25.6	23.5	25.6	23.3	23.3		23.0	23.0
n41/38(PC3)	1	30.6	22.5		24.0	21.0	24.0	22.5	18.5		23.0	23.0
n41(PC2)	1	30.6	22.5		24.0	21.0	24.0	22.5	18.5		23.0	23.0
n41/38(PC3)	2	17.5	19.0	22.5	22.5	18.0		19.0	18.0	23.5	23.0	23.0
n41(PC2)	2	17.5	19.0	22.5	22.5	18.0		19.0	18.0	23.5	23.0	23.0
n41/38(PC3)	3	16.5	20.0	20.5		17.0		21.0	18.5		23.0	23.0
n41(PC2)	3	16.5	20.0	20.5		17.0		21.0	18.5		23.0	23.0
n48	3	15.0	19.5	19.5		15.5		19.5	16.0		23.0	23.0
n48	4	16.5	19.0	19.5	19.5	14.0		22.0	15.5	20.0	23.0	23.0
n48	6	13.0	17.0	19.0		13.0		18.0	13.0		23.0	23.0
n48	8	18.0	18.5	19.5	19.5	17.0		19.5	18.0	21.0	23.0	23.0
n77/78(PC3)	3	13.5	18.5	19.5		15.5		20.0	17.5		23.0	23.0
n77/78(PC2)	3	13.5	18.5	19.5		15.5		20.0	17.5		23.0	23.0
n77/78(PC3)	4	15.0	18.5	20.5	20.5	14.5		19.0	15.0	20.5	23.0	23.0
n77/78(PC2)	4	15.0	18.5	20.5	20.5	14.5		19.0	15.0	20.5	23.0	23.0
n77/78(PC3)	6	13.0	18.0	19.5		12.5		17.5	13.0		23.0	23.0
n77/78(PC2)	6	13.0	18.0	19.5		12.5		17.5	13.0		23.0	23.0
n77/78(PC3)	8	17.0	20.0	20.5	20.5	15.0		21.0	17.5	20.5	23.0	23.0
n77/78(PC2)	8	17.0	20.0	20.5	20.5	15.0		21.0	17.5	20.5	23.0	23.0
n25/2	2+3	17.0	19.0	22.5	22.5	16.0		19.0	15.0	19.0	23.0	23.0
n25/2	2+1	18.0	19.0	22.5	22.5	16.5	22.5	19.5	16.5	19.5	23.0	23.0
n25/2	0+3	18.5	21.5	23.7	23.7	19.0	23.7	22.0	20.5		23.0	23.0
n25/2	0+1	30.8	21.0		23.6	20.0	23.6	23.3	21.5		23.0	23.0
n66	2+3	18.5	20.5	23.4	23.4	18.0		22.0	18.0	22.0	23.0	23.0
n66	2+1	19.0	19.0	24.4	24.4	18.5	24.4	20.5	19.0	20.5	23.0	23.0

n66	0+3	20.0	22.0	24.0	24.0	19.5	24.0	23.6	21.0		23.0	23.0
n66	0+1	30.6	19.0		24.0	20.0	24.0	20.0	21.0		23.0	23.0
UL MIMO_n41_(PC2)	2+3	16.0	19.0	21.1	21.1	17.5		18.5	17.0	18.5	20.0	20.0
UL MIMO_n41_(PC1.5)	2+3	16.0	19.0	21.1	21.1	17.5		18.5	17.0	18.5	20.0	20.0
UL MIMO_n41_(PC2)	2+1	16.5	19.0	21.6	21.6	17.5	21.6	19.0	17.0	19.0	20.0	20.0
UL MIMO_n41_(PC1.5)	2+1	16.5	19.0	21.6	21.6	17.5	21.6	19.0	17.0	19.0	20.0	20.0
UL MIMO_n41_(PC2)	0+3	17.0	20.8	22.1	22.1	17.5	22.1	21.0	18.0		20.0	20.0
UL MIMO_n41_(PC1.5)	0+3	17.0	20.8	22.1	22.1	17.5	22.1	21.0	18.0		20.0	20.0
UL MIMO_n41_(PC2)	0+1	30.9	21.1		22.2	19.5	22.2	21.4	19.0		20.0	20.0
UL MIMO_n41_(PC1.5)	0+1	30.9	21.1		22.2	19.5	22.2	21.4	19.0		20.0	20.0
UL MIMO_n48	4+8	16.0	19.0	21.0	21.0	14.5		20.7	15.5	20.7	20.0	20.0
UL MIMO_n48	4+6	13.5	17.5	19.5	19.5	13.5		18.5	13.5	18.5	20.0	20.0
UL MIMO_n48	3+8	14.0	18.5	20.2	20.2	15.5		19.0	16.5	19.0	20.0	20.0
UL MIMO_n48	3+6	13.0	17.5	18.0		13.5		18.5	13.5		20.0	20.0
UL MIMO_n77_(PC2)	4+8	15.5	18.0	19.0	19.0	13.5		19.0	15.0	20.6	20.0	20.0
UL MIMO_n77_(PC1.5)	4+8	15.5	18.0	19.0	19.0	13.5		19.0	15.0	20.6	20.0	20.0
UL MIMO_n77_(PC2)	4+6	13.0	17.5	19.5	19.5	12.5		17.0	13.0	17.0	20.0	20.0
UL MIMO_n77_(PC1.5)	4+6	13.0	17.5	19.5	19.5	12.5		17.0	13.0	17.0	20.0	20.0
UL MIMO_n77_(PC2)	3+8	13.5	18.0	19.0	19.0	15.0		19.0	17.0	19.0	20.0	20.0
UL MIMO_n77_(PC1.5)	3+8	13.5	18.0	19.0	19.0	15.0		19.0	17.0	19.0	20.0	20.0
UL MIMO_n77_(PC2)	3+6	12.5	17.5	19.5		12.5		17.0	12.5		20.0	20.0
UL MIMO_n77_(PC1.5)	3+6	12.5	17.5	19.5		12.5		17.0	12.5		20.0	20.0
UL MIMO_n78	4+8	15.5	18.0	19.0	19.0	13.5		19.0	15.0	20.6	20.0	20.0
UL MIMO_n78	4+6	13.0	17.5	19.5	19.5	12.5		17.0	13.0	17.0	20.0	20.0
UL MIMO_n78	3+8	13.5	18.0	19.0	19.0	15.0		19.0	17.0	19.0	20.0	20.0
UL MIMO_n78	3+6	12.5	17.5	19.5		12.5		17.0	12.5		20.0	20.0
Bluetooth	7	13.9	16.4	15.9	15.9	12.9		16.4	13.9	17.9	17.9	17.9
Bluetooth	5	15.9	16.9	17.9		16.9		17.9	16.9		17.9	17.9
WLAN_2.4GHz	7	12.5	16.0	15.5	15.5	11.0		17.0	13.0	17.0	21.0	21.0
WLAN_2.4GHz	5	12.5	16.0	15.5	15.5	11.0		17.0	13.0	17.0	21.0	21.0
WLAN_2.4GHz	7+5	12.5	16.0	15.5	15.5	11.0		17.0	13.0	17.0	21.0	24.0
WLAN_5.2GHz	7	15.0	18.0	18.5	18.5	16.0		18.0	17.0	18.0	18.5	18.5
WLAN_5.2GHz	5	15.0	18.0	18.5	18.5	16.0		18.0	17.0	18.0	18.5	18.5
WLAN_5.2GHz	7+5	15.0	18.0	18.5	18.5	16.0		18.0	17.0	18.0	18.5	21.5
WLAN_5.3GHz	7	15.0	18.0	18.5	18.5			18.0		18.0	18.5	18.5
WLAN_5.3GHz	5	15.0	18.0	18.5	18.5			18.0		18.0	18.5	18.5
WLAN_5.3GHz	7+5	15.0	18.0	18.5	18.5			18.0		18.0	18.5	21.5
WLAN_5.5GHz	7	14.0	18.0	18.5	18.5			18.5		18.5	18.5	18.5
WLAN_5.5GHz	5	14.0	18.0	18.5	18.5			18.5		18.5	18.5	18.5
WLAN_5.5GHz	7+5	14.0	18.0	18.5	18.5			18.5		18.5	18.5	21.5
WLAN_5.8GHz	7	14.0	17.5	18.0	18.0	15.0		18.0	17.0	18.0	18.0	18.0
WLAN_5.8GHz	5	14.0	17.5	18.0	18.0	15.0		18.0	17.0	18.0	18.0	18.0
WLAN_5.8GHz	7+5	14.0	17.5	18.0	18.0	15.0		18.0	17.0	18.0	18.0	21.0
WLAN_6GHz	7	11.5	11.5	11.5	11.5			11.5		11.5	11.5	11.5
WLAN_6GHz	5	11.5	11.5	11.5	11.5			11.5		11.5	11.5	11.5
WLAN_6GHz	7+5	11.5	11.5	11.5	11.5			11.5		11.5	11.5	14.5


Note:

- 1) *Pmax is used for RF tune up procedure. The maximum allowed output power is equal to Pmax + total uncertainty (The device uncertainty for sub-6GHz WWAN is 1.0 dB for this DUT, the device uncertainty for WLAN/BT Bands is 1.5 dB).
- 2) All Plimit power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., GSM & LTE TDD & NR TDD).
- 3) The max allowed output power is the Plimit +total uncertainty, and if Plimit is higher than Pmax, the device output power will be Pmax instead.

6. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance>:

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (7125MHz) and lowest (750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensors placed coincident with antenna elements at the top and bottom ends of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back of the device.
3. The output power will reduce to body worn power level when top and bottom sensor pad be detected.
4. The sensors used to detect the proximity of the user's body at the front or back surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s). When front or back body worn condition is detected reduced power will be active.
5. The device employs proximity sensors also can detect the presence of the user's a finger or hand when handheld state at the front/back/top/bottom/left/right sides of the device. When front/back/top/bottom/left/right sides of handheld condition is detected reduced power will be active.
6. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance -1mm was performed:

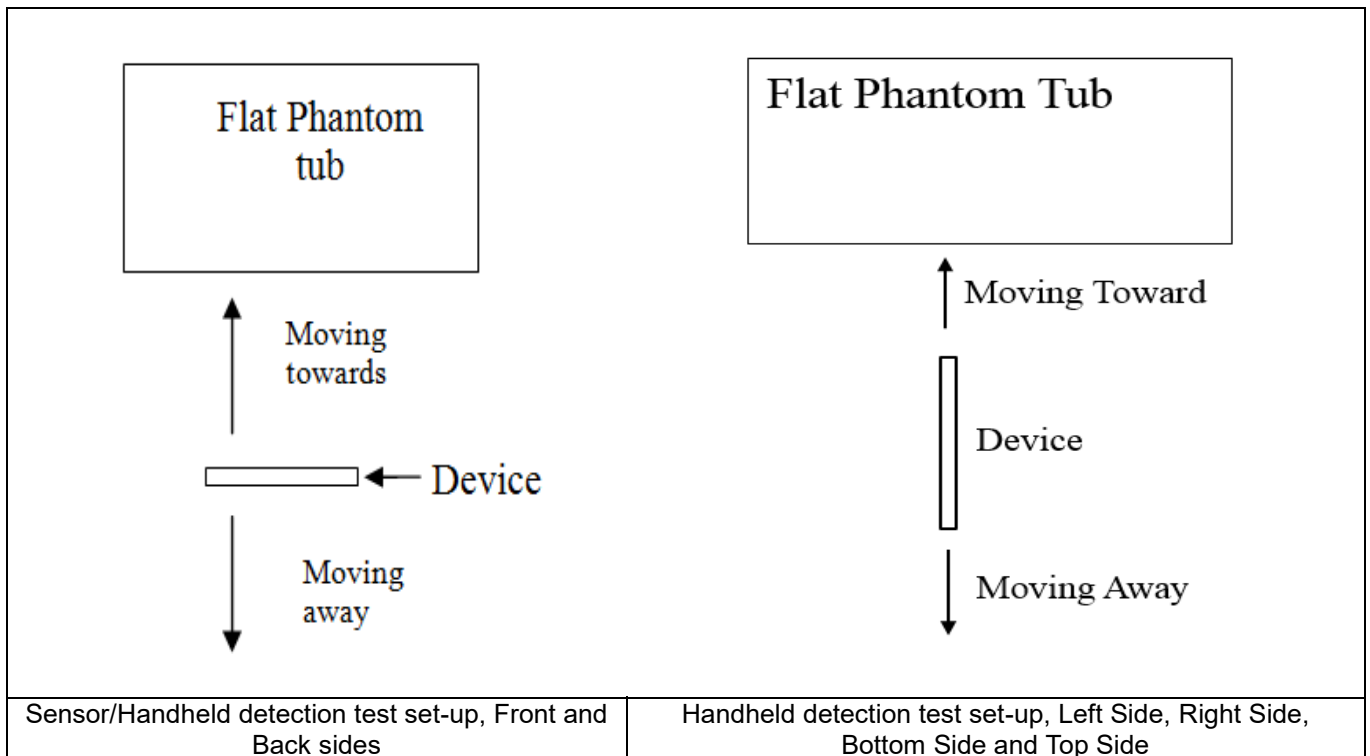

<Flip-Open Mode>
<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	13	18	14	19

<Handheld for ANT 0>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	8	13	10	16	11	17	8	12

<Handheld for ANT1>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	7	13	11	17	6	11	12	17

<Handheld for ANT2/4>

Proximity Sensor Triggering Distance (mm)							
Position	Front		Back		Left Side		
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving away
Minimum	12	18	11	16	19	24	

<Handheld for ANT 3/5>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	12	17	10	16	10	15	15	20

<Handheld for ANT 6/5>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	12	17	7	12	9	14	13	19

<Handheld for ANT 7/8>

Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Right Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	11	16	6	11	15	21

<Flip-Close Mode>
<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	17	21	23	27

<Handheld for ANT 0>

Proximity Sensor Triggering Distance (mm)						
Position	Back		Left Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	11	17	10	16	8	13

<Handheld for ANT1>

Proximity Sensor Triggering Distance (mm)						
Position	Back		Right Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	11	16	6	11	11	16

<Handheld for ANT2/4>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Left Side	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	14	19	20	24

<Handheld for ANT 3/5>

Proximity Sensor Triggering Distance (mm)						
Position	Front		Left Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	10	15	10	15	13	18

<Handheld for ANT 6/5>

Proximity Sensor Triggering Distance (mm)						
Position	Front		Right Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	9	12	8	13	13	18

<Handheld for ANT 7/8>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Right Side	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	12	16	17	20

7. RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

8. Specific Absorption Rate (SAR)

8.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

8.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

9. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

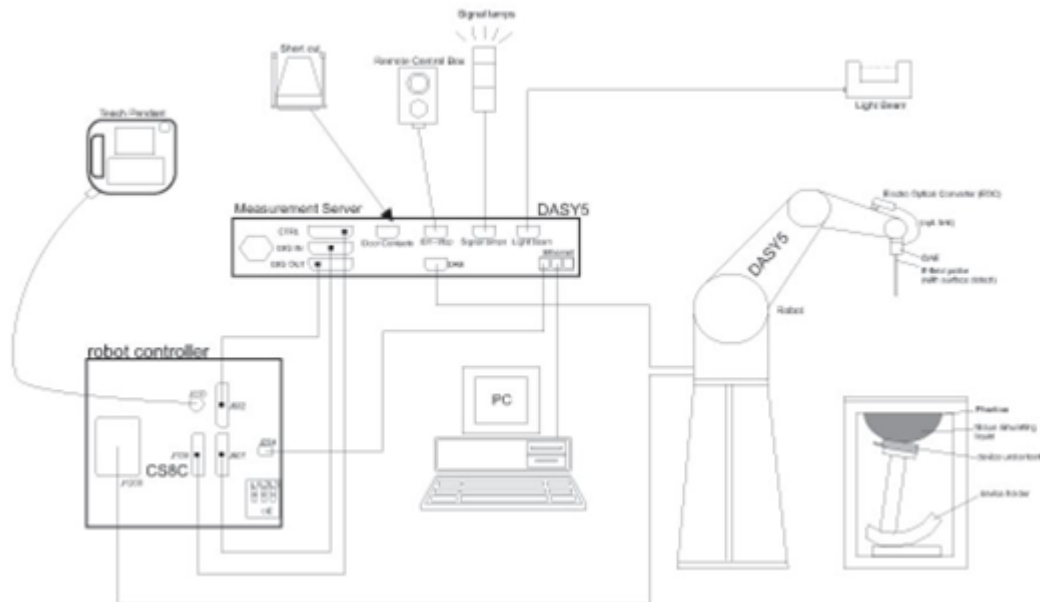

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win10 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

9.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

9.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

9.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

9.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

10. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

10.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

10.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

10.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

10.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

10.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

11. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1099	Dec. 15, 2021	Dec. 13, 2024
SPEAG	835MHz System Validation Kit	D835V2	4d162	Dec. 17, 2021	Dec. 15, 2024
SPEAG	1750MHz System Validation Kit	D1750V2	1137	Oct. 19, 2021	Oct. 17, 2024
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	Dec. 20, 2021	Dec. 18, 2024
SPEAG	2300MHz System Validation Kit	D2300V2	1056	Oct. 20, 2021	Oct. 18, 2024
SPEAG	2450MHz System Validation Kit	D2450V2	924	Nov. 03, 2023	Nov. 02, 2024
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Dec. 20, 2021	Dec. 18, 2024
SPEAG	3500MHz System Validation Kit	D3500V2	1076	May 09, 2022	May 08, 2025
SPEAG	3700MHz System Validation Kit	D3700V2	1037	May 09, 2022	May 08, 2025
SPEAG	3900MHz System Validation Kit	D3900V2	1022	Aug. 18, 2022	Aug. 17, 2025
SPEAG	5000MHz System Validation Kit	D5GHzV2	1341	Dec. 13, 2021	Dec. 11, 2024
SPEAG	Data Acquisition Electronics	DAE4	1386	Jul. 17, 2023	Jul. 16, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7641	Apr. 24, 2023	Apr. 23, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7576	Aug. 23, 2023	Aug. 22, 2024
SPEAG	SAM Twin Phantom	QD 000 P40 CD	1671	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201300653	Jul. 05, 2023	Jul. 04, 2024
Anritsu	Radio communication analyzer	MT8820C	6201341952	Dec. 28, 2023	Dec. 27, 2024
Anritsu	Radio communication analyzer	MT8821C	6262314715	Jul. 05, 2023	Jul. 04, 2024
Anritsu	Radio communication analyzer	MT8821C	6272278319	Jul. 05, 2023	Jul. 04, 2024
Agilent	Wireless Communication Test Set	E5515C	MY50267224	Jul. 05, 2023	Jul. 04, 2024
Keysight	Network Analyzer	E5071C	MY46523671	Oct. 16, 2023	Oct. 15, 2024
Speag	Dielectric Assessment KIT	DAK-3.5	1071	Feb. 20, 2023	Feb. 19, 2024
Speag	Dielectric Assessment KIT	DAK-3.5	1071	Feb. 19, 2024	Feb. 18, 2025
Agilent	Signal Generator	N5181A	MY50145381	Dec. 28, 2023	Dec. 27, 2024
R&S	Signal Generator	SMB100A	175779	Dec. 28, 2023	Dec. 27, 2024
Anritsu	Power Sensor	MA2411B	1306099	Oct. 16, 2023	Oct. 15, 2024
Anritsu	Power Meter	ML2495A	1349001	Oct. 16, 2023	Oct. 15, 2024
Anritsu	Power Sensor	MA2411B	1542004	Dec. 28, 2023	Dec. 27, 2024
Anritsu	Power Meter	ML2495A	1339473	Dec. 28, 2023	Dec. 27, 2024
R&S	CBT BLUETOOTH TESTER	CBT	100963	Dec. 28, 2023	Dec. 27, 2024
R&S	Spectrum Analyzer	FSP7	100818	Jul. 05, 2023	Jul. 04, 2024
TES	Hygrometer	1310	200505600	Jul. 08, 2023	Jul. 07, 2024
Anymetre	Thermo-Hygrometer	JR593	2015030903	Jan. 02, 2024	Jan. 01, 2025
Anymetre	Thermo-Hygrometer	JR593	2015102801	Jan. 02, 2024	Jan. 01, 2025
SPEAG	Device Holder	N/A	N/A	N/A	N/A
AR	Amplifier	5S1G4	0333096	Note 1	
Mini-Circuits	Amplifier	ZVE-3W-83+	599201528	Note 1	
Mini-Circuits	Amplifier	ZVA-183W-S+	726202215	Note 1	
ARRA	Power Divider	A3200-2	N/A	Note 1	
ET Industries	Dual Directional Coupler	C-058-10	N/A	Note 1	
Jinkexinhua	Attenuator	10db-8G	N/A	Note 1	

Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check.
- Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

12. System Verification

12.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

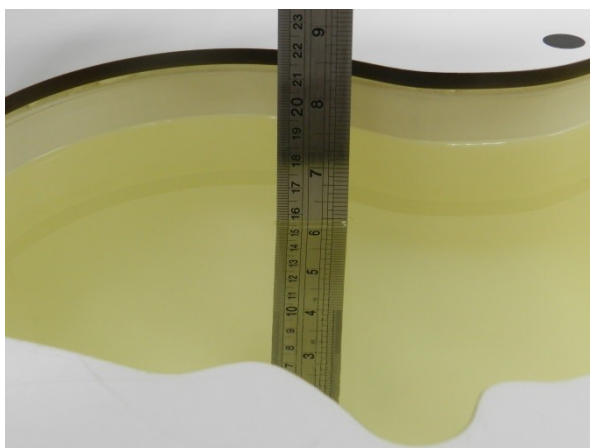


Fig 11.1 Photo of Liquid Height for Head SAR



Fig 11.2 Photo of Liquid Height for Body SAR

12.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%



<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	Head	22.5	0.880	40.797	0.89	41.90	-1.12	-2.63	±5	2024/2/20
750	Head	22.4	0.895	41.004	0.89	41.90	0.56	-2.14	±5	2024/2/28
750	Head	22.3	0.885	40.799	0.89	41.90	-0.56	-2.63	±5	2024/3/20
835	Head	22.5	0.904	41.212	0.90	41.50	0.44	-0.69	±5	2024/2/19
835	Head	22.2	0.931	40.830	0.90	41.50	3.44	-1.61	±5	2024/2/29
835	Head	22.3	0.917	40.748	0.90	41.50	1.89	-1.81	±5	2024/3/16
1750	Head	22.7	1.375	41.471	1.37	40.10	0.36	3.42	±5	2024/2/17
1750	Head	22.5	1.363	38.967	1.37	40.10	-0.51	-2.83	±5	2024/2/26
1750	Head	22.2	1.345	38.879	1.37	40.10	-1.82	-3.04	±5	2024/3/6
1900	Head	22.2	1.428	41.216	1.40	40.00	2.00	3.04	±5	2024/2/18
1900	Head	22.5	1.453	39.136	1.40	40.00	3.79	-2.16	±5	2024/3/1
1900	Head	22.1	1.412	38.427	1.40	40.00	0.86	-3.93	±5	2024/3/12
2300	Head	22.1	1.662	38.225	1.67	39.50	-0.48	-3.23	±5	2024/2/12
2300	Head	22.7	1.706	39.905	1.67	39.50	2.16	1.03	±5	2024/2/27
2300	Head	22.3	1.701	38.886	1.67	39.50	1.86	-1.55	±5	2024/3/14
2450	Head	22.6	1.816	38.596	1.80	39.20	0.89	-1.54	±5	2024/3/13
2450	Head	22.7	1.777	38.496	1.80	39.20	-1.28	-1.80	±5	2024/3/21
2450	Head	22.2	1.765	38.042	1.80	39.20	-1.94	-2.95	±5	2024/3/25
2600	Head	22.3	1.931	38.414	1.96	39.00	-1.48	-1.50	±5	2024/2/8
2600	Head	22.2	1.879	37.832	1.96	39.00	-4.13	-2.99	±5	2024/3/3
2600	Head	22.6	1.934	37.625	1.96	39.00	-1.33	-3.53	±5	2024/3/23
3500	Head	22.7	2.858	38.432	2.91	37.90	-1.79	1.40	±5	2024/2/9
3500	Head	22.3	2.889	39.656	2.91	37.90	-0.72	4.63	±5	2024/3/7
3500	Head	22.4	2.978	39.003	2.91	37.90	2.34	2.91	±5	2024/3/26
3700	Head	22.6	3.007	38.198	3.12	37.70	-3.62	1.32	±5	2024/2/10
3700	Head	22.7	3.046	39.416	3.12	37.70	-2.37	4.55	±5	2024/3/9
3700	Head	22.5	3.138	38.755	3.12	37.70	0.58	2.80	±5	2024/3/27
3900	Head	22.5	3.167	37.998	3.33	37.51	-4.89	1.30	±5	2024/2/11
3900	Head	22.5	3.215	39.205	3.33	37.51	-3.45	4.52	±5	2024/3/11
3900	Head	22.3	3.312	38.554	3.33	37.51	-0.54	2.78	±5	2024/3/28
5250	Head	22.3	4.626	34.202	4.71	35.95	-1.78	-4.86	±5	2024/2/14
5250	Head	22.6	4.498	35.960	4.71	35.95	-4.50	0.03	±5	2024/3/15
5250	Head	22.6	4.660	36.667	4.71	35.95	-1.06	1.99	±5	2024/3/29
5600	Head	22.6	4.968	34.688	5.07	35.50	-2.01	-2.29	±5	2024/2/15
5600	Head	22.4	4.843	35.495	5.07	35.50	-4.48	-0.01	±5	2024/3/17
5600	Head	22.3	5.030	36.172	5.07	35.50	-0.79	1.89	±5	2024/3/30
5750	Head	22.4	5.119	34.477	5.22	35.35	-1.93	-2.47	±5	2024/2/16
5750	Head	22.4	4.995	35.316	5.22	35.35	-4.31	-0.10	±5	2024/3/19
5750	Head	22.2	5.193	35.971	5.22	35.35	-0.52	1.76	±5	2024/3/31

12.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2024/2/20	750	Head	250	1099	7576	1386	2.170	8.540	8.68	1.64
2024/2/28	750	Head	250	1099	7576	1386	2.160	8.540	8.64	1.17
2024/3/20	750	Head	250	1099	7576	1386	2.240	8.540	8.96	4.92
2024/2/19	835	Head	250	4d162	7576	1386	2.280	9.640	9.12	-5.39
2024/2/29	835	Head	250	4d162	7576	1386	2.520	9.640	10.08	4.56
2024/3/16	835	Head	250	4d162	7576	1386	2.550	9.640	10.2	5.81
2024/2/17	1750	Head	250	1137	7576	1386	9.330	36.500	37.32	2.25
2024/2/26	1750	Head	250	1137	7576	1386	8.600	36.500	34.4	-5.75
2024/3/6	1750	Head	250	1137	7576	1386	9.110	36.500	36.44	-0.16
2024/2/18	1900	Head	250	5d182	7576	1386	10.300	39.600	41.2	4.04
2024/3/1	1900	Head	250	5d182	7576	1386	10.200	39.600	40.8	3.03
2024/3/12	1900	Head	250	5d182	7576	1386	9.280	39.600	37.12	-6.26
2024/2/12	2300	Head	250	1056	7641	1386	12.800	48.800	51.2	4.92
2024/2/27	2300	Head	250	1056	7641	1386	12.600	48.800	50.4	3.28
2024/3/14	2300	Head	250	1056	7641	1386	12.100	48.800	48.4	-0.82
2024/3/13	2450	Head	250	924	7576	1386	12.900	52.300	51.6	-1.34
2024/3/21	2450	Head	250	924	7576	1386	12.600	52.300	50.4	-3.63
2024/3/25	2450	Head	250	924	7576	1386	12.700	52.300	50.8	-2.87
2024/2/8	2600	Head	250	1070	7576	1386	14.500	56.200	58	3.20
2024/3/3	2600	Head	250	1070	7576	1386	13.800	56.200	55.2	-1.78
2024/3/23	2600	Head	250	1070	7576	1386	13.300	56.200	53.2	-5.34
2024/2/9	3500	Head	100	1076	7576	1386	6.700	66.200	67	1.21
2024/3/7	3500	Head	100	1076	7576	1386	6.350	66.200	63.5	-4.08
2024/3/26	3500	Head	100	1076	7576	1386	6.190	66.200	61.9	-6.50
2024/2/10	3700	Head	100	1037	7576	1386	6.960	66.700	69.6	4.35
2024/3/9	3700	Head	100	1037	7576	1386	6.770	66.700	67.7	1.50
2024/3/27	3700	Head	100	1037	7576	1386	6.970	66.700	69.7	4.50
2024/2/11	3900	Head	100	1022	7576	1386	6.890	66.400	68.9	3.77
2024/3/11	3900	Head	100	1022	7576	1386	7.150	66.400	71.5	7.68
2024/3/28	3900	Head	100	1022	7576	1386	6.800	66.400	68	2.41
2024/2/14	5250	Head	100	1341	7576	1386	7.660	80.700	76.6	-5.08
2024/3/15	5250	Head	100	1341	7576	1386	8.360	80.700	83.6	3.59
2024/3/29	5250	Head	100	1341	7576	1386	8.660	80.700	86.6	7.31
2024/2/15	5600	Head	100	1341	7576	1386	8.760	84.500	87.6	3.67
2024/3/17	5600	Head	100	1341	7576	1386	9.000	84.500	90	6.51
2024/3/30	5600	Head	100	1341	7576	1386	8.810	84.500	88.1	4.26
2024/2/16	5750	Head	100	1341	7576	1386	7.960	80.600	79.6	-1.24
2024/3/19	5750	Head	100	1341	7576	1386	8.460	80.600	84.6	4.96
2024/3/31	5750	Head	100	1341	7576	1386	8.670	80.600	86.7	7.57



<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2024/2/20	750	Head	250	1099	7576	1386	1.450	5.650	5.8	2.65
2024/2/28	750	Head	250	1099	7576	1386	1.420	5.650	5.68	0.53
2024/3/20	750	Head	250	1099	7576	1386	1.520	5.650	6.08	7.61
2024/2/19	835	Head	250	4d162	7576	1386	1.480	6.260	5.92	-5.43
2024/2/29	835	Head	250	4d162	7576	1386	1.530	6.260	6.12	-2.24
2024/3/16	835	Head	250	4d162	7576	1386	1.670	6.260	6.68	6.71
2024/2/17	1750	Head	250	1137	7576	1386	4.700	19.200	18.8	-2.08
2024/2/26	1750	Head	250	1137	7576	1386	4.520	19.200	18.08	-5.83
2024/3/6	1750	Head	250	1137	7576	1386	4.820	19.200	19.28	0.42
2024/2/18	1900	Head	250	5d182	7576	1386	5.430	20.200	21.72	7.52
2024/3/1	1900	Head	250	5d182	7576	1386	5.200	20.200	20.8	2.97
2024/3/12	1900	Head	250	5d182	7576	1386	4.820	20.200	19.28	-4.55
2024/2/12	2300	Head	250	1056	7641	1386	5.970	22.800	23.88	4.74
2024/2/27	2300	Head	250	1056	7641	1386	6.030	22.800	24.12	5.79
2024/3/14	2300	Head	250	1056	7641	1386	5.830	22.800	23.32	2.28
2024/3/13	2450	Head	250	924	7576	1386	6.180	24.500	24.72	0.90
2024/3/21	2450	Head	250	924	7576	1386	6.050	24.500	24.2	-1.22
2024/3/25	2450	Head	250	924	7576	1386	6.110	24.500	24.44	-0.24
2024/2/8	2600	Head	250	1070	7576	1386	6.220	24.600	24.88	1.14
2024/3/3	2600	Head	250	1070	7576	1386	5.850	24.600	23.4	-4.88
2024/3/23	2600	Head	250	1070	7576	1386	5.700	24.600	22.8	-7.32
2024/2/9	3500	Head	100	1076	7576	1386	2.550	25.500	25.5	0.00
2024/3/7	3500	Head	100	1076	7576	1386	2.480	25.500	24.8	-2.75
2024/3/26	3500	Head	100	1076	7576	1386	2.370	25.500	23.7	-7.06
2024/2/10	3700	Head	100	1037	7576	1386	2.560	24.600	25.6	4.07
2024/3/9	3700	Head	100	1037	7576	1386	2.490	24.600	24.9	1.22
2024/3/27	3700	Head	100	1037	7576	1386	2.570	24.600	25.7	4.47
2024/2/11	3900	Head	100	1022	7576	1386	2.460	23.700	24.6	3.80
2024/3/11	3900	Head	100	1022	7576	1386	2.500	23.700	25	5.49
2024/3/28	3900	Head	100	1022	7576	1386	2.420	23.700	24.2	2.11
2024/2/14	5250	Head	100	1341	7576	1386	2.190	23.100	21.9	-5.19
2024/3/15	5250	Head	100	1341	7576	1386	2.330	23.100	23.3	0.87
2024/3/29	5250	Head	100	1341	7576	1386	2.410	23.100	24.1	4.33
2024/2/15	5600	Head	100	1341	7576	1386	2.490	24.000	24.9	3.75
2024/3/17	5600	Head	100	1341	7576	1386	2.490	24.000	24.9	3.75
2024/3/30	5600	Head	100	1341	7576	1386	2.570	24.000	25.7	7.08
2024/2/16	5750	Head	100	1341	7576	1386	2.260	22.700	22.6	-0.44
2024/3/19	5750	Head	100	1341	7576	1386	2.440	22.700	24.4	7.49
2024/3/31	5750	Head	100	1341	7576	1386	2.360	22.700	23.6	3.96

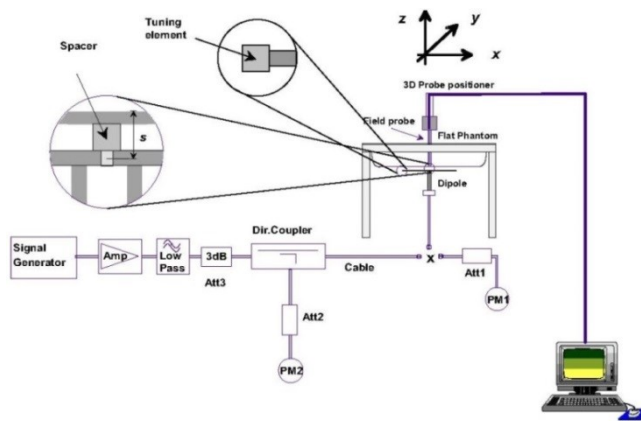


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

13. RF Exposure Positions

13.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

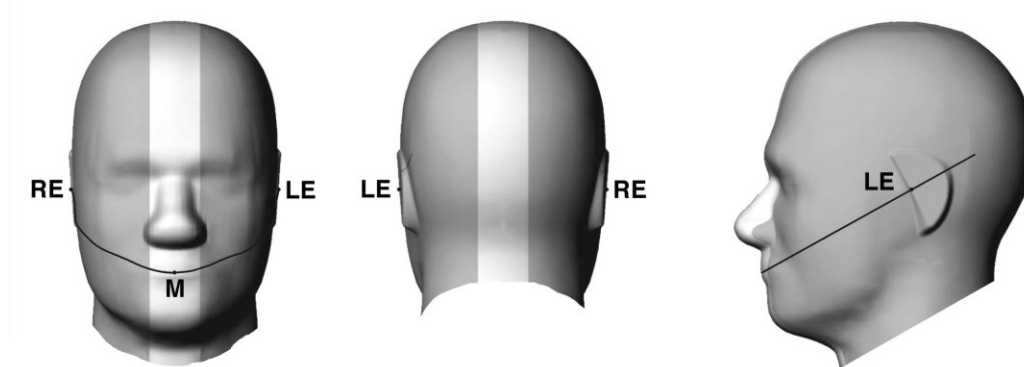


Fig 12.1.1 Front, back, and side views of SAM twin phantom

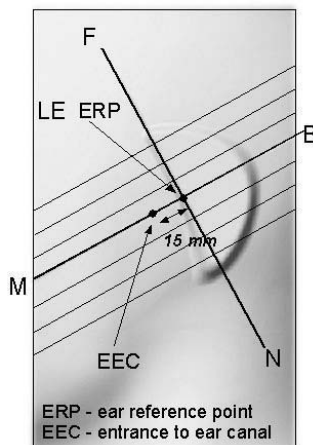


Fig 12.1.2 Close-up side view of phantom showing the ear region.

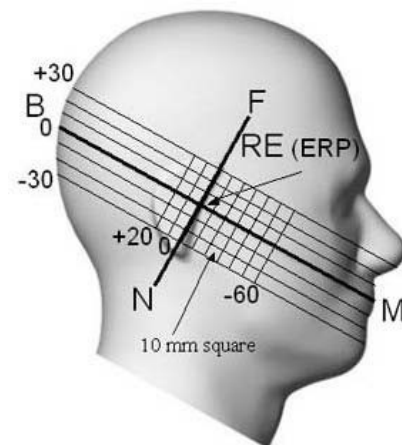


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

13.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

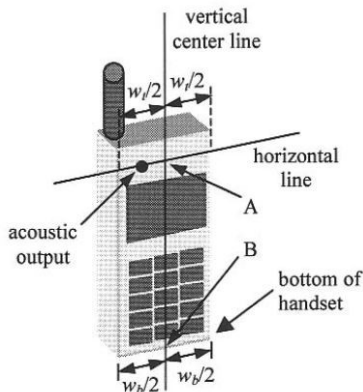


Fig 12.2.1 Handset vertical and horizontal reference lines—"fixed case"

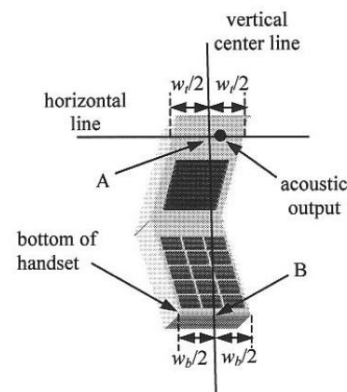


Fig 12.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

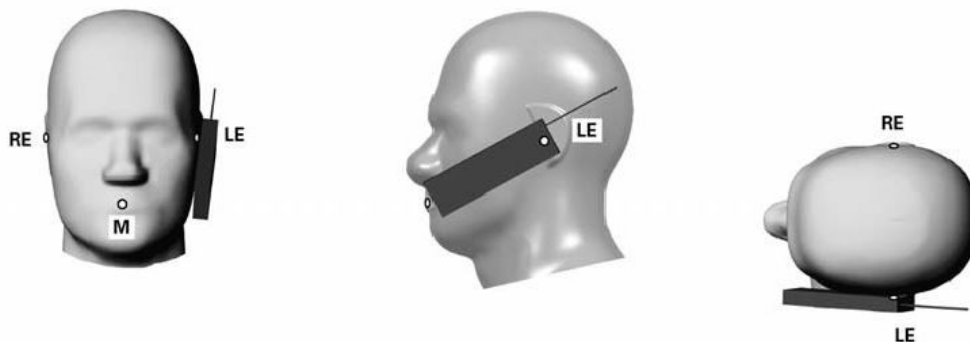


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

13.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

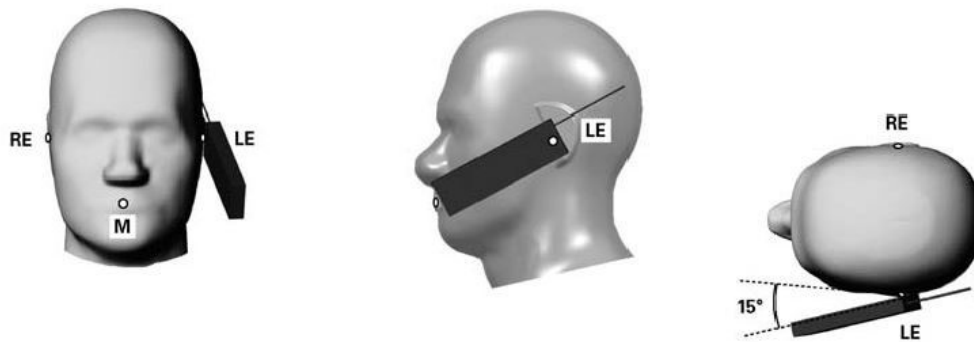


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

13.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

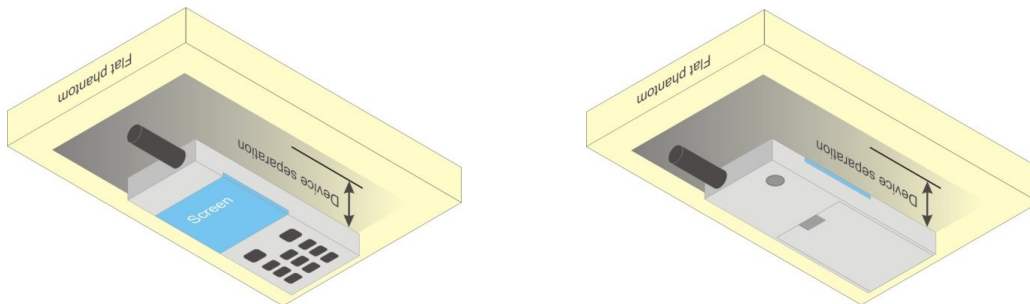


Fig 12.4 Body Worn Position

13.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

13.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

14. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_o/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_o/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_o/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

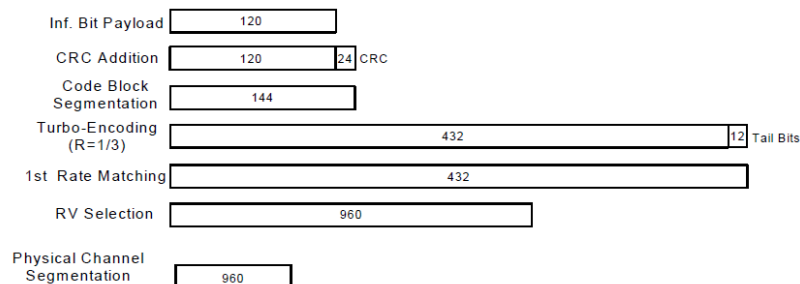


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration


<WCDMA Conducted Power>**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA/ DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA/ DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA/ DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA/ DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA/ DC-HSDPA.

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 / B38 / B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B2 /B4 /B5 / B17 / B38 SAR test was covered by B25 / B66 / B26 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to May 2017 TCB workshop, for 16QAM and 64QAM, 256QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 256QAM, 64QAM and 16QAM signal modulation are correct.

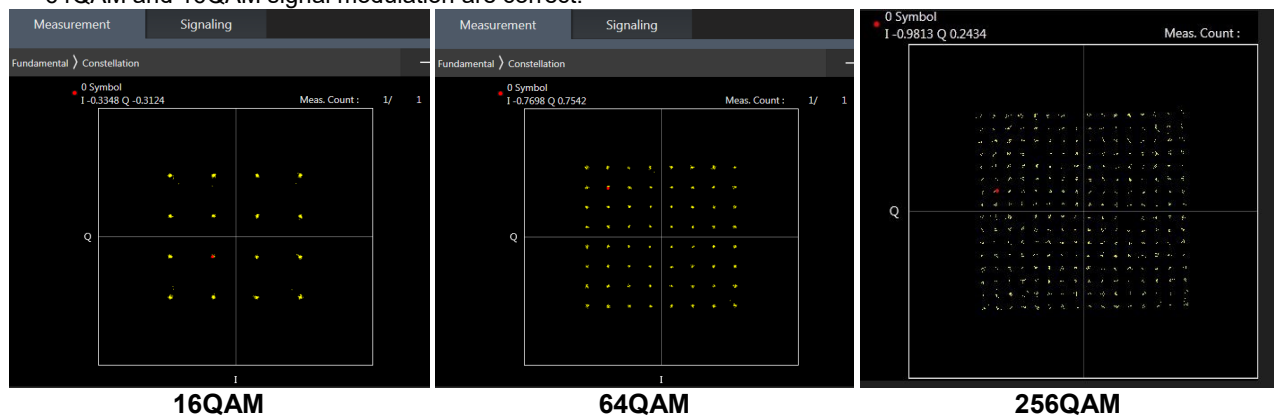

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

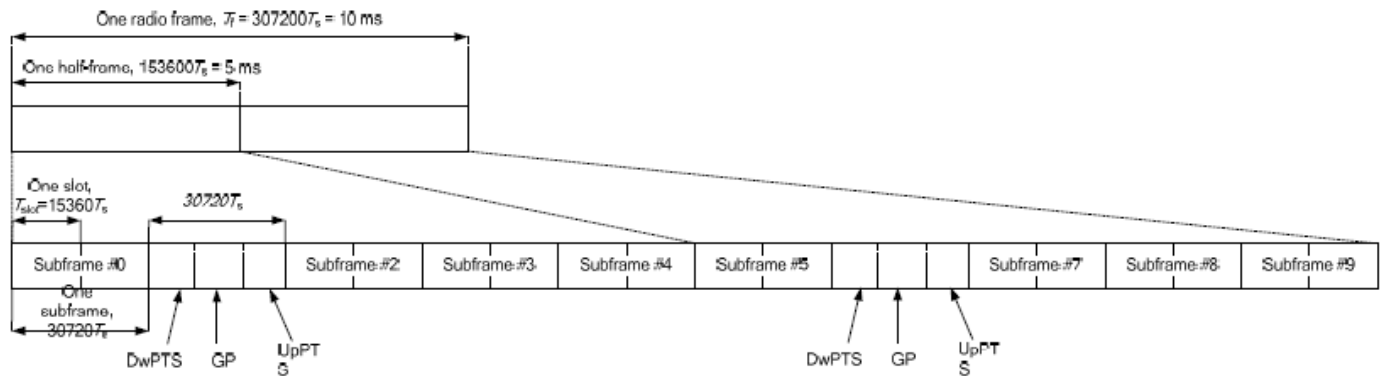


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE TDD Power class 2

- Uplink-downlink configuration: 1. In a half-frame consisted of 5 subframes, uplink operation is in 2 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(2+0.167)/5 = 43.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(2+0.143)/5 = 42.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:2.33 (42.9 %) was used perform testing and considering the theoretical duty cycle of 43.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 42.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $43.3\%/42.9\% = 1.009$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

For LTE TDD Power class 3

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

The device can adjust uplink/downlink configuration automatically according to the transmitting power class level, as followings:

LTE TDD Band	Power Class level	support uplink/downlink configuration
LTE Band 41	> 23	1,2,3,4,5
	=23	0,1,2,3,4,5,6
	< 23	0,1,2,3,4,5,6

<LTE Carrier Aggregation>
General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. The gray color table is covered by other combinations and no need to verify power.

2CC Downlink Carrier Aggregation				3CC Downlink Carrier Aggregation				4CC Downlink Carrier Aggregation			
Number	Combination	4X4 MIMO	Covered by Measurement Superset	Number	Combination	4X4 MIMO	Covered by Measurement Superset	Number	Combination	4X4 MIMO	Covered by Measurement Superset
1	CA_12A-30A	30A	3CC-1	1	CA_12A-30A-66A	30A-66A, 66A, 30A	4CC-1	1	CA_12A-30A-66A-66A	30A-66A-66A, 66A-66A, 30A-66A, 66A, 30A	
2	CA_12A-66A	66A	3CC-2	2	CA_12A-66A-66A	66A-66A, 66A	4CC-1	2	CA_12B-66A-66A	66A-66A, 66A	5CC-3
3	CA_12B		3CC-4	3	CA_12A-66C	66C, 66A	4CC-14	3	CA_13A-48A-66B	48A-66B, 66B, 48A-66A, 66A, 48A	
4	CA_13A-48A	48A	3CC-5	4	CA_12B-66A	66A	4CC-2	4	CA_13A-48A-66C	48A-66C, 66C, 48A-66A, 66A, 48A	
5	CA_13A-66A	66A	3CC-5	5	CA_13A-48A-66A	48A-66A, 66A, 48A		5	CA_13A-48C-66A	48C-66A, 48C, 48A-66A, 66A, 48A	
6	CA_14A-30A		3CC-10	6	CA_13A-48C	48C, 48A	4CC-5	6	CA_13A-48D	48D, 48C, 48A	5CC-4
7	CA_14A-66A	66A	3CC-10	7	CA_13A-66A-66A	66A-66A, 66A	4CC-17	9	CA_14A-30A-66A-66A	30A-66A-66A, 66A-66A, 30A-66A, 66A, 30A	
8	CA_25A-25A	25A-25A, 25A	3CC-12	8	CA_13A-66B	66B, 66A	4CC-3	10	CA_14A-66A-66A-66A	66A-66A-66A, 66A-66A, 66A	
9	CA_25A-26A	25A	3CC-12	9	CA_13A-66C	66C, 66A	4CC-4	11	CA_25A-41D	25A-41D, 41D, 25A-41C, 41C, 25A-41A, 41A, 25A	
10	CA_25A-41A	25A-41A, 41A, 25A		10	CA_14A-30A-66A	30A-66A, 66A, 30A	4CC-9	12	CA_29A-30A-66A-66A	30A-66A-66A, 66A-66A, 30A-66A, 66A, 30A	
11	CA_25A-66A	25A-66A, 66A, 25A	3CC-13	11	CA_14A-66A-66A	66A-66A, 66A	4CC-10	13	CA_2A-12A-66A-66A	2A-66A-66A, 66A-66A, 2A-66A, 66A, 2A	5CC-5
12	CA_26A-41A	41A		12	CA_25A-25A-26A	25A-25A, 25A		14	CA_2A-12A-66C	2A-66C, 66C, 2A-66A, 66A, 2A	
13	CA_29A-30A	30A	3CC-16	13	CA_25A-25A-66A	25A-66A, 25A-25A, 66A, 25A	4CC-89	15	CA_2A-12B-66A	2A-66A, 66A, 2A	5CC-3
14	CA_29A-66A	66A	3CC-16	14	CA_25A-41C	25A-41C, 41C, 25A-41A, 41A, 25A		16	CA_2A-13A-48C	2A-48C, 48C, 2A-48A, 48A, 2A	
15	CA_2A-12A	2A	3CC-18	15	CA_26A-41C	41C, 41A		17	CA_2A-13A-66A-66A	2A-66A-66A, 66A-66A, 2A-66A, 66A, 2A	5CC-7
16	CA_2A-13A	2A	3CC-21	16	CA_29A-30A-66A	30A-66A, 66A, 30A	4CC-12	18	CA_2A-13A-66B	2A-66B, 66B, 2A-66A, 66A, 2A	
17	CA_2A-14A	2A	3CC-23	17	CA_29A-66A-66A	66A-66A, 66A	4CC-12	19	CA_2A-13A-66C	2A-66C, 66C, 2A-66A, 66A, 2A	
18	CA_2A-17A	2A		18	CA_2A-12A-30A	2A-30A, 30A, 2A	4CC-21	20	CA_2A-14A-66A-66A	2A-66A-66A, 66A-66A, 2A-66A, 66A, 2A	5CC-8
19	CA_2A-29A	2A	3CC-25	19	CA_2A-12A-66A	2A-66A, 66A, 2A	4CC-13	21	CA_2A-2A-12A-30A	2A-2A-30A, 2A-30A, 2A-2A, 30A, 2A	
20	CA_2A-2A	2A-2A, 2A	3CC-27	20	CA_2A-12B	2A	4CC-15	22	CA_2A-2A-12A-66A	2A-2A-66A, 2A-66A, 2A-2A, 66A, 2A	5CC-5
21	CA_2A-30A	2A-30A, 30A, 2A	3CC-31	21	CA_2A-13A-48A	2A-48A, 48A, 2A		23	CA_2A-2A-12B	2A-2A, 2A	5CC-6
22	CA_2A-38A	2A-38A, 38A, 2A		22	CA_2A-13A-66A	2A-66A, 66A, 2A	4CC-17	24	CA_2A-2A-13A-66A	2A-2A-66A, 2A-66A, 2A-2A, 66A, 2A	5CC-7
23	CA_2A-48A	2A-48A, 48A, 2A	3CC-38	23	CA_2A-14A-30A	2A-30A, 30A, 2A	4CC-25	25	CA_2A-2A-14A-30A	2A-2A-30A, 2A-30A, 2A-2A, 30A, 2A	
24	CA_2A-4A	2A-4A, 4A, 2A	3CC-41	24	CA_2A-14A-66A	2A-66A, 66A, 2A	4CC-20	26	CA_2A-2A-14A-66A	2A-2A-66A, 2A-66A, 2A-2A, 66A, 2A	5CC-8
25	CA_2A-5A	2A	3CC-49	25	CA_2A-29A-30A	2A-30A, 30A, 2A	4CC-27	27	CA_2A-2A-29A-30A	2A-2A-30A, 2A-30A, 2A-2A, 30A, 2A	
26	CA_2A-66A	2A-66A, 66A, 2A	3CC-54	26	CA_2A-29A-66A	2A-66A, 66A, 2A		28	CA_2A-2A-30A-66A	2A-2A-30A-66A, 2A-30A-66A, 2A-2A-66A, 2A-2A-30A, 30A-66A, 2A-66A, 2A-30A, 2A-2A, 66A, 30A, 2A	
27	CA_2A-71A	2A	3CC-35	27	CA_2A-2A-12A	2A-2A, 2A	4CC-21	29	CA_2A-2A-4A-12A	2A-2A-4A, 2A-4A, 2A-2A, 4A, 2A	
28	CA_2A-7A	2A-7A, 7A, 2A	3CC-36	28	CA_2A-2A-13A	2A-2A, 2A	4CC-24	30	CA_2A-2A-4A-4A	2A-2A-4A-4A, 2A-4A-4A, 2A-2A-4A, 4A-4A,	



FCC SAR Test Report

Report No. : FA420703

										2A-4A, 2A-2A, 4A, 2A	
29	CA_2C	2C, 2A	3CC-64	29	CA_2A-2A-14A	2A-2A, 2A	4CC-25	31	CA_2A-2A-4A-5A	2A-2A-4A, 2A-4A, 2A-2A, 4A, 2A	
30	CA_30A-66A	30A-66A, 66A, 30A	3CC-66	30	CA_2A-2A-29A	2A-2A, 2A	4CC-27	32	CA_2A-2A-5A-30A	2A-2A-30A, 2A-30A, 2A-2A, 30A, 2A	
31	CA_41A-41A	41A-41A, 41A	3CC-67	31	CA_2A-2A-30A	2A-2A-30A, 2A-30A, 2A-2A, 30A, 2A	4CC-28	33	CA_2A-2A-5A-66A	2A-2A-66A, 2A-66A, 2A-2A, 66A, 2A	5CC-11
32	CA_41A-48A	41A-48A, 48A, 41A		32	CA_2A-2A-4A	2A-2A-4A, 2A-4A, 2A-2A, 4A, 2A	4CC-29	34	CA_2A-2A-5A-7A	2A-2A-7A, 2A-7A, 2A-2A, 7A, 2A	
33	CA_41C	41C, 41A	3CC-68	33	CA_2A-2A-5A	2A-2A, 2A	4CC-31	35	CA_2A-2A-5B	2A-2A, 2A	5CC-14
34	CA_48A-48A	48A-48A, 48A	3CC-70	34	CA_2A-2A-66A	2A-2A-66A, 2A-66A, 2A-2A, 66A, 2A	4CC-33	36	CA_2A-2A-66A-66A	2A-2A-66A-66A, 2A-66A-66A, 2A-2A-66A, 66A-66A, 2A-66A, 2A-2A, 66A, 2A	5CC-5
35	CA_48A-66A	48A-66A, 66A, 48A	3CC-70	35	CA_2A-2A-71A	2A-2A, 2A	4CC-37	37	CA_2A-2A-66A-71A	2A-2A-66A, 2A-66A, 2A-2A, 66A, 2A	
36	CA_48A-71A	48A	3CC-71	36	CA_2A-2A-7A	2A-2A-7A, 2A-7A, 2A-2A, 7A, 2A	4CC-40	38	CA_2A-2A-66B	2A-2A-66B, 2A-66B, 2A-2A-66A, 66B, 2A-66A, 2A-2A, 66A, 2A	5CC-12
37	CA_48B	48B, 48A		37	CA_2A-30A-66A	2A-30A-66A, 30A-66A, 2A-66A, 2A-30A, 66A, 30A, 2A	4CC-42	39	CA_2A-2A-66C	2A-2A-66C, 2A-66C, 2A-2A-66A, 66C, 2A-66A, 2A-2A, 66A, 2A	5CC-13
38	CA_48C	48C, 48A	3CC-76	38	CA_2A-48A-48A	2A-48A-48A, 48A-48A, 2A-48A, 48A, 2A		40	CA_2A-2A-7A-12A	2A-2A-7A, 2A-7A, 2A-2A, 7A, 2A	
39	CA_4A-12A	4A	3CC-83	39	CA_2A-48A-66A	2A-48A-66A, 48A-66A, 2A-66A, 2A-48A, 66A, 48A, 2A	4CC-44	41	CA_2A-2A-7A-66A	2A-2A-7A-66A, 2A-7A-66A, 2A-2A-7A, 2A-2A-66A, 7A-66A, 2A-7A, 2A-66A, 2A-2A, 7A, 66A, 2A	
40	CA_4A-13A	4A	3CC-84	40	CA_2A-48C	2A-48C, 48C, 2A-48A, 48A, 2A	4CC-45	42	CA_2A-30A-66A-66A	2A-30A-66A-66A, 30A-66A-66A, 2A-66A-66A, 2A-30A-66A, 66A-66A, 30A-66A, 2A-66A, 2A-30A, 66A, 30A, 2A	
41	CA_4A-17A	4A		41	CA_2A-4A-12A	2A-4A, 4A, 2A	4CC-48	43	CA_2A-48A-48C	2A-48A-48C, 48A-48C, 2A-48C, 2A-48A-48A, 48C, 48A-48A, 2A-48A, 48A, 2A	
42	CA_4A-29A	4A	3CC-85	42	CA_2A-4A-13A	2A-4A, 4A, 2A		44	CA_2A-48A-66A-66A	2A-48A-66A-66A, 48A-66A-66A, 2A-66A-66A, 2A-48A-66A, 66A-66A, 48A-66A, 2A-66A, 2A-48A, 66A, 48A, 2A	
43	CA_4A-30A	4A-30A, 4A, 30A	3CC-89	43	CA_2A-4A-29A	2A-4A, 4A, 2A		45	CA_2A-48C-66A	2A-48C-66A, 48C-66A, 2A-48C, 2A-48A-66A, 48C, 48A-66A, 2A-66A, 2A-48A, 66A, 48A, 2A	5CC-16
44	CA_4A-48A	4A-48A, 4A, 48A		44	CA_2A-4A-30A	2A-4A-30A, 4A-30A, 2A-4A, 2A-30A, 4A, 30A, 2A		46	CA_2A-48D	2A-48D, 48D, 2A-48C, 48C, 2A-48A, 48A, 2A	5CC-17
45	CA_4A-4A	4A-4A, 4A	3CC-83	45	CA_2A-4A-4A	2A-4A-4A, 4A-4A, 2A-4A, 4A, 2A	4CC-48	47	CA_2A-4A-12B	2A-4A, 4A, 2A	
46	CA_4A-5A	4A	3CC-97	46	CA_2A-4A-5A	2A-4A, 4A, 2A	4CC-49	48	CA_2A-4A-4A-12A	2A-4A-4A, 4A-4A, 2A-4A, 4A, 2A	
47	CA_4A-71A	4A	3CC-87	47	CA_2A-4A-71A	2A-4A, 4A, 2A		49	CA_2A-4A-4A-5A	2A-4A-4A, 4A-4A, 2A-4A, 4A, 2A	
48	CA_4A-7A	4A-7A, 7A, 4A	3CC-90	48	CA_2A-4A-7A	2A-4A-7A, 4A-7A, 2A-7A, 2A-4A, 7A, 4A, 2A	4CC-50	50	CA_2A-4A-7A-7A	2A-4A-7A-7A, 4A-7A-7A, 2A-7A-7A, 2A-4A-7A, 7A-7A, 4A-7A, 2A-7A, 2A-4A, 7A, 4A, 2A	
49	CA_5A-30A	30A	3CC-93	49	CA_2A-5A-30A	2A-30A, 30A, 2A	4CC-32	51	CA_2A-4A-7C	2A-4A-7C, 4A-7C, 2A-7C, 2A-4A-7A, 7C, 4A-7A, 2A-7A, 2A-4A, 7A, 4A, 2A	
50	CA_5A-41A	41A		50	CA_2A-5A-48A	2A-48A, 48A, 2A		52	CA_2A-5A-48C	2A-48C, 48C, 2A-48A, 48A, 2A	
51	CA_5A-48A	48A	3CC-94	51	CA_2A-5A-66A	2A-66A, 66A, 2A		53	CA_2A-5A-66A-66A	2A-66A-66A, 66A-66A, 2A-66A, 66A, 2A	5CC-11
52	CA_5A-66A	66A	3CC-96	52	CA_2A-5A-7A	2A-7A, 7A, 2A	4CC-56	54	CA_2A-5A-66B	2A-66B, 66B, 2A-66A, 66A, 2A	5CC-12



FCC SAR Test Report

Report No. : FA420703

53	CA_5A-7A	7A	3CC-99	53	CA_2A-5B	2A	4CC-57	55	CA_2A-5A-66C	2A-66C, 66C, 2A-66A, 66A, 2A	5CC-13
54	CA_5B		3CC-102	54	CA_2A-66A-66A	2A-66A-66A, 66A-66A, 2A-66A, 66A, 2A	4CC-59	56	CA_2A-5A-7A-7A	2A-7A-7A, 7A-7A, 2A-7A, 7A, 2A	
55	CA_66A-66A	66A-66A, 66A	3CC-104	55	CA_2A-66A-71A	2A-66A, 66A, 2A	4CC-60	57	CA_2A-5B-30A	2A-30A, 30A, 2A	
56	CA_66A-71A	66A	3CC-105	56	CA_2A-66B	2A-66B, 66B, 2A-66A, 66A, 2A	4CC-38	58	CA_2A-5B-66A	2A-66A, 66A, 2A	5CC-14
57	CA_66B	66B, 66A	3CC-74	57	CA_2A-66C	2A-66C, 66C, 2A-66A, 66A, 2A	4CC-39	59	CA_2A-66A-66A-66A	2A-66A-66A-66A, 66A-66A-66A, 2A-66A-66A, 66A-66A, 2A-66A, 66A, 2A	
58	CA_66C	66C, 66A	3CC-75	58	CA_2A-7A-12A	2A-7A, 7A, 2A	4CC-40	60	CA_2A-66A-66A-71A	2A-66A-66A, 66A-66A, 2A-66A, 66A, 2A	
59	CA_7A-12A	7A	3CC-109	59	CA_2A-7A-13A	2A-7A, 7A, 2A	4CC-63	61	CA_2A-66C-71A	2A-66C, 66C, 2A-66A, 66A, 2A	
60	CA_7A-13A	7A	3CC-111	60	CA_2A-7A-29A	2A-7A, 7A, 2A	4CC-64	62	CA_2A-7A-66A-66A	2A-7A-66A-66A, 7A-66A-66A, 2A-7A-66A, 2A-66A-66A, 7A-66A, 66A-66A, 2A-7A, 2A-66A, 7A, 66A, 2A	5CC-2
61	CA_7A-25A	7A-25A, 7A, 25A	3CC-112	61	CA_2A-7A-66A	2A-7A-66A, 7A-66A, 2A-7A, 2A-66A, 7A, 66A, 2A	4CC-65	63	CA_2A-7A-7A-13A	2A-7A-7A, 7A-7A, 2A-7A, 7A, 2A	
62	CA_7A-29A	7A	3CC-114	62	CA_2A-7A-7A	2A-7A-7A, 7A-7A, 2A-7A, 7A, 2A	4CC-63	64	CA_2A-7A-7A-29A	2A-7A-7A, 7A-7A, 2A-7A, 7A, 2A	
63	CA_7A-66A	7A-66A, 7A, 66A	3CC-115	63	CA_2A-7C	2A-7C, 7C, 2A-7A, 7A, 2A	4CC-66	65	CA_2A-7A-7A-66A	2A-7A-7A-66A, 7A-7A-66A, 2A-7A-7A, 2A-7A-66A, 7A-7A, 7A-66A, 2A-7A, 2A-66A, 7A, 66A, 2A	5CC-20
64	CA_7A-71A	7A	3CC-116	64	CA_2C-12A	2C, 2A		66	CA_2A-7C-13A	2A-7C, 7C, 2A-7A, 7A, 2A	
65	CA_7A-7A	7A-7A, 7A	3CC-117	65	CA_2C-66A	2C-66A, 2C, 2A-66A, 66A, 2A	4CC-69	67	CA_2A-7C-29A	2A-7C, 7C, 2A-7A, 7A, 2A	
66	CA_7B	7B, 7A		66	CA_30A-66A-66A	30A-66A-66A, 66A-66A, 30A-66A, 66A, 30A	4CC-42	68	CA_2A-7C-66A	2A-7C-66A, 7C-66A, 2A-7C, 2A-7A-66A, 7C, 7A-66A, 2A-7A, 2A-66A, 7A, 66A, 2A	5CC-21
67	CA_7C	7C, 7A	3CC-121	67	CA_41A-41A-41A	41A-41A-41A, 41A-41A, 41A		69	CA_2C-66A-66A	2C-66A-66A, 2C-66A, 2A-66A-66A, 66A-66A, 2C, 2A-66A, 66A, 2A	
				68	CA_41A-41C	41A-41C, 41C, 41A-41A, 41A		70	CA_48A-48A-66A-66A	48A-48A-66A-66A, 48A-66A-66A, 48A-48A-66A, 66A-66A, 48A-66A, 48A-48A, 66A, 48A	
				69	CA_41D	41D, 41C, 41A		71	CA_48A-48C-66A	48A-48C-66A, 48C-66A, 48A-48C, 48A-48A-66A, 48C, 48A-66A, 48A-48A, 66A, 48A	
				70	CA_48A-48A-66A	48A-48A-66A, 48A-66A, 48A-48A, 66A, 48A	4CC-70	72	CA_48C-48C	48C-48C, 48A-48C, 48C, 48A-48A, 48A	5CC-15
				71	CA_48A-48A-71A	48A-48A, 48A		73	CA_48C-66A-66A	48C-66A-66A, 48C-66A, 48A-66A-66A, 66A-66A, 48C, 48A-66A, 66A, 48A	5CC-16
				72	CA_48A-48C	48A-48C, 48C, 48A-48A, 48A	4CC-71	74	CA_48C-66B	48C-66B, 48C-66A, 48C, 48A-66A, 66A, 48A	
				73	CA_48A-66A-66A	48A-66A-66A, 66A-66A, 48A-66A, 66A, 48A	4CC-70	75	CA_48C-66C	48C-66C, 48C-66A, 48A-66C, 66C, 48C, 48A-66A, 66A, 48A	
				74	CA_48A-66B	48A-66B, 66B, 48A-66A, 66A, 48A	4CC-3	76	CA_48D-66A	48D-66A, 48D, 48C-66A, 48C, 48A-66A, 66A, 48A	5CC-1
				75	CA_48A-66C	48A-66C, 66C, 48A-66A, 66A, 48A	4CC-4	77	CA_48E	48E, 48D, 48C, 48A	5CC-2
				76	CA_48C-66A	48C-66A, 48C, 48A-66A, 66A, 48A	4CC-5	78	CA_4A-48D	4A-48D, 4A-48C, 48D, 4A-48A, 48C, 4A, 48A	
				77	CA_48C-71A	48C, 48A		79	CA_4A-4A-12B	4A-4A, 4A	
				78	CA_48D	48D, 48C, 48A	4CC-76	80	CA_5A-30A-66A-66A	30A-66A-66A,	



FCC SAR Test Report

Report No. : FA420703

										66A-66A, 30A-66A, 66A, 30A	
				79	CA_4A-12A-30A	4A-30A, 4A, 30A		81	CA_5A-48A-66A-66A	48A-66A-66A, 66A-66A, 48A-66A, 66A, 48A	
				80	CA_4A-12B	4A	4CC-79	82	CA_5A-48C-66A	48C-66A, 48C, 48A-66A, 66A, 48A	5CC-25
				81	CA_4A-29A-30A	4A-30A, 4A, 30A		83	CA_5A-48D	48D, 48C, 48A	6CC-25
				82	CA_4A-48C	4A-48C, 4A-48A, 48C, 4A, 48A		84	CA_5A-7A-66A-66A	7A-66A-66A, 7A-66A, 66A-66A, 7A, 66A	
				83	CA_4A-4A-12A	4A-4A, 4A	4CC-48	85	CA_5A-7A-7A-66A	7A-7A-66A, 7A-7A, 7A-66A, 7A, 66A	
				84	CA_4A-4A-13A	4A-4A, 4A		86	CA_5A-7C-66A	7C-66A, 7C, 7A-66A, 7A, 66A	5CC-26
				85	CA_4A-4A-29A	4A-4A, 4A		87	CA_5B-30A-66A	30A-66A, 66A, 30A	
				86	CA_4A-4A-5A	4A-4A, 4A	4CC-49	88	CA_5B-66A-66A	66A-66A, 66A	5CC-19
				87	CA_4A-4A-71A	4A-4A, 4A		89	CA_7A-25A-25A-66A	7A-25A-25A-66A, 7A-25A-66A, 7A-25A-25A, 25A-25A-66A, 7A-66A, 7A-25A, 25A-66A, 25A-25A, 7A, 66A, 25A	5CC-27
				88	CA_4A-4A-7A	4A-4A-7A, 4A-7A, 4A-4A, 7A, 4A		90	CA_7A-7A-13A-66A	7A-7A-66A, 7A-7A, 7A-66A, 7A, 66A	
				89	CA_4A-5A-30A	4A-30A, 4A, 30A		91	CA_7A-7A-25A-25A	7A-7A-25A-25A, 7A-7A-25A, 7A-25A-25A, 7A-7A, 7A-25A, 25A-25A, 7A, 25A	5CC-27
				90	CA_4A-7A-12A	4A-7A, 7A, 4A		92	CA_7A-7A-25A-66A	7A-7A-25A-66A, 7A-7A-66A, 7A-7A-25A, 7A-25A-66A, 7A-7A, 7A-66A, 7A-25A, 25A-66A, 7A, 66A, 25A	5CC-27
				91	CA_4A-7A-7A	4A-7A-7A, 7A-7A, 4A-7A, 7A, 4A	4CC-50	93	CA_7A-7A-29A-66A	7A-7A-66A, 7A-7A, 7A-66A, 7A, 66A	
				92	CA_4A-7C	4A-7C, 7C, 4A-7A, 7A, 4A	4CC-51	94	CA_7A-7A-66A-66A	7A-7A-66A-66A, 7A-7A-66A, 7A-66A-66A, 7A-7A, 7A-66A, 66A-66A, 7A, 66A	5CC-20
				93	CA_5A-30A-66A	30A-66A, 66A, 30A	4CC-80	95	CA_7C-13A-66A	7C-66A, 7C, 7A-66A, 7A, 66A	
				94	CA_5A-48A-66A	48A-66A, 66A, 48A	4CC-81	96	CA_7C-29A-66A	7C-66A, 7C, 7A-66A, 7A, 66A	
				95	CA_5A-48C	48C, 48A	4CC-82	97	CA_7C-66A-66A	7C-66A-66A, 7C-66A, 7A-66A-66A, 7C, 7A-66A, 66A-66A, 7A, 66A	5CC-21
				96	CA_5A-66A-66A	66A-66A, 66A	4CC-80	98	CA_2A-2A-5A-30A	2A-2A-30A, 2A-30A, 2A-2A, 30A, 2A	
				97	CA_5A-66B	66B, 66A	4CC-54				
				98	CA_5A-66C	66C, 66A	4CC-55				
				99	CA_5A-7A-66A	7A-66A, 7A, 66A	4CC-85				
				100	CA_5A-7A-7A	7A-7A, 7A	4CC-85				
				101	CA_5A-7C	7C, 7A	4CC-86				
				102	CA_5B-30A	30A	4CC-87				
				103	CA_5B-66A	66A	4CC-88				
				104	CA_66A-66A-66A	66A-66A-66A, 66A-66A, 66A	4CC-10				
				105	CA_66A-66A-71A	66A-66A, 66A	4CC-60				
				106	CA_66A-66B	66A-66B, 66B, 66A-66A, 66A					
				107	CA_66A-66C	66A-66C, 66C, 66A-66A, 66A					
				108	CA_66C-71A	66C, 66A	4CC-61				
				109	CA_7A-12A-66A	7A-66A, 7A, 66A					
				110	CA_7A-12B	7A					
				111	CA_7A-13A-66A	7A-66A, 7A, 66A	4CC-90				
				112	CA_7A-25A-25A	7A-25A-25A, 7A-25A, 25A-25A, 7A, 25A	4CC-91				



FCC SAR Test Report

Report No. : FA420703

				113	CA_7A-25A-66A	7A-25A-66A, 7A-66A, 7A-25A, 25A-66A, 7A, 66A, 25A	4CC-92				
				114	CA_7A-29A-66A	7A-66A, 7A, 66A	4CC-93				
				115	CA_7A-66A-66A	7A-66A-66A, 7A-66A, 66A-66A, 7A, 66A	4CC-94				
				116	CA_7A-66A-71A	7A-66A, 7A, 66A					
				117	CA_7A-7A-13A	7A-7A, 7A	4CC-90				
				118	CA_7A-7A-25A	7A-7A-25A, 7A-7A, 7A-25A, 7A, 25A	4CC-91				
				119	CA_7A-7A-29A	7A-7A, 7A	4CC-93				
				120	CA_7A-7A-66A	7A-7A-66A, 7A-7A, 7A-66A, 7A, 66A	4CC-94				
				121	CA_7C-13A	7C, 7A	4CC-95				
				122	CA_7C-29A	7C, 7A	4CC-96				
				123	CA_7C-66A	7C-66A, 7C, 7A-66A, 7A, 66A	4CC-97				

5CC Downlink Carrier Aggregation				6CC Downlink Carrier Aggregation			
Number	Combination	4X4 MIMO	Covered by Measurement Superset	Number	Combination	4X4 MIMO	Covered by Measurement Superset
1	CA_13A-48D-66A	48D, 48C, 66A, 48A		1	CA_2A-48E-66A	2A-66A, 66A, 2A	
2	CA_13A-48E			2	CA_5A-48D-66A-66A		
3	CA_2A-12B-66A-66A	2A-66A-66A, 66A-66A, 2A-66A, 66A, 2A					
4	CA_2A-13A-48D	48D, 48C, 48A, 2A					
5	CA_2A-2A-12A-66A-66A	2A-66A-66A, 2A-2A-66A, 66A-66A, 2A-66A, 2A-2A, 66A, 2A					
6	CA_2A-2A-12B-66A	2A-2A-66A, 2A-66A, 2A-2A, 66A, 2A					
7	CA_2A-2A-13A-66A-66A	2A-66A-66A, 2A-2A-66A, 66A-66A, 2A-66A, 2A-2A, 66A, 2A					
8	CA_2A-2A-14A-66A-66A	2A-66A-66A, 2A-2A-66A, 66A-66A, 2A-66A, 2A-2A, 66A, 2A					
9	CA_2A-2A-29A-66A-66A	2A-66A-66A, 2A-2A-66A, 66A-66A, 2A-66A, 2A-2A, 66A, 2A					
10	CA_2A-2A-4A-71A	2A-2A-4A, 2A-4A, 2A-2A, 4A, 2A					
11	CA_2A-2A-5A-66A-66A	2A-66A-66A, 2A-2A-66A, 66A-66A, 2A-66A, 2A-2A, 66A, 2A					
12	CA_2A-2A-5A-66B	2A-66B, 66B, 2A-66A, 2A-2A, 66A, 2A					
13	CA_2A-2A-5A-66C	2A-66C, 66C, 2A-66A, 2A-2A, 66A, 2A					
14	CA_2A-2A-5B-66A	2A-2A-66A, 2A-66A, 2A-2A, 66A, 2A					
15	CA_2A-48C-48C	2A-48C, 48C, 2A-48A, 48A, 2A					
16	CA_2A-48C-66A-66A	48C-66A, 2A-66A-66A, 2A-48C, 66A-66A, 48C, 48A-66A, 2A-66A, 2A-48A, 66A, 48A, 2A					
17	CA_2A-48D-66A	48D, 48C, 2A-66A, 66A, 48A, 2A					
18	CA_2A-48E	2A					
19	CA_2A-5B-66A-66A	2A-66A-66A, 66A-66A, 2A-66A, 66A, 2A					
20	CA_2A-7A-7A-66A-66A	7A-7A-66A, 7A-66A-66A, 2A-7A-7A, 2A-7A-66A, 2A-66A-66A, 7A-7A, 7A-66A, 66A-66A, 2A-7A, 2A-66A, 7A, 66A, 2A					
21	CA_2A-7C-66A-66A	7C-66A, 2A-7C, 2A-66A-66A, 7C, 7A-66A, 66A-66A, 2A-7A, 2A-66A, 7A, 66A, 2A					
22	CA_48C-48C-66A	48C-66A, 48C, 48A-66A, 66A, 48A					
23	CA_48E-66A	66A					
24	CA_4A-48E	4A					
25	CA_5A-48C-66A-66A	48C-66A, 66A-66A, 48C, 48A-66A, 66A, 48A					
26	CA_5A-7C-66A-66A	7C-66A, 7C, 7A-66A, 66A-66A, 7A, 66A					
27	CA_7A-7A-25A-25A-66A	7A-7A-66A, 7A-7A-25A, 7A-25A-66A, 7A-25A-25A, 25A-25A-66A, 7A-7A, 7A-66A, 7A-25A, 25A-66A, 25A-25A, 7A, 66A, 25A					

LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink six carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

LTE 4x4 MIMO (Downlink)

This device supports downlink 4x4 MIMO operations for LTE Band 2/4/7/25/30/38/41/48/66 only. Uplink transmission is limited to a single output stream. Power measurements were performed with downlink 4x4 MIMO active for the configuration with highest measured maximum conducted power with 4x4 downlink MIMO inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

Per FCC Guidance, SAR for downlink 4x4 MIMO was not needed since the maximum average output power in 4x4 downlink MIMO mode was not > 0.25 dB higher than the maximum output power with downlink 4x4 MIMO inactive. When carrier aggregation is applicable, power measurements were performed with the downlink carrier aggregation and 4x4 DL MIMO active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

4X4 MIMO	Band
	LTE Band 2/4/7/25/30/38/41/48/66

**LTE Carrier Aggregation Conducted Power (Uplink)**

Uplink Intra CA	TX Antenna			
5B	Ant 0	Ant 1		
7C	Ant 2	Ant 3	Ant 0	Ant 1
66B	Ant 2	Ant 3	Ant 0	Ant 1
66C	Ant 2	Ant 3	Ant 0	Ant 1
41C	Ant 2	Ant 3	Ant 0	Ant 1
48B	Ant 4	Ant 8	Ant 3	Ant 6
48C	Ant 4	Ant 8	Ant 3	Ant 6

<Intra-band>**General Note:**

- The device supports intra-band uplink carrier aggregation for LTE B5/7/66/41/48 with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- The device supports uplink carrier aggregation with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- According Nov. 2017 TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- Additional SAR measurement for LTE UL CA with other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.
- LTE CA_66B/48B, test was covered by CA_66C/48C, therefore, SAR was only assessed for CA_66C/48C.

<Inter-band uplink carrier aggregation consideration>

LTE Uplink Inter CA	LTE Band	Main TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX
CA_2A-4A	LTE B2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	LTE B4	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
CA_2A-5A	LTE B2	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	LTE B5	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
CA_2A-7A	LTE B2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	LTE B7	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
CA_2A-12A	LTE B2	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	LTE B12	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
CA_2A-13A	LTE B2	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	LTE B13	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
CA_2A-14A	LTE B2	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	LTE B14	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
CA_2A-30A	LTE B2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	LTE B30	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
CA_2A-66A	LTE B2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	LTE B66	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
CA_2A-71A	LTE B2	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	LTE B71	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
CA_2A-48A	LTE B2	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0



FCC SAR Test Report

Report No. : FA420703

	LTE B48	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
CA_4A-5A	LTE B4	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	LTE B5	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
CA_4A-7A	LTE B4	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	LTE B7	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
CA_4A-12A	LTE B4	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	LTE B12	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
CA_4A-13A	LTE B4	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	LTE B13	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
CA_4A-71A	LTE B4	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	LTE B71	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
CA_5A-7A	LTE B5	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	LTE B7	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
CA_5A-30A	LTE B5	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	LTE B30	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
CA_5A-66A	LTE B5	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	LTE B66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
CA_5A-48A	LTE B5	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	LTE B48	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
CA_7A-12A	LTE B7	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	LTE B12	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
CA_7A-66A	LTE B7	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	LTE B66	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
CA_12A-30A	LTE B12	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	LTE B30	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
CA_12A-66A	LTE B12	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	LTE B66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
CA_13A-66A	LTE B13	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	LTE B66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
CA_14A-30A	LTE B14	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	LTE B30	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
CA_14A-66A	LTE B14	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	LTE B66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
CA_66A-71A	LTE B66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	LTE B71	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
CA_48A-66A	LTE B48	Ant 4	Ant 4	Ant 4	Ant 4	Ant 8	Ant 8	Ant 8	Ant 8	Ant 3	Ant 3	Ant 3	Ant 6	Ant 6	Ant 6	Ant 6
	LTE B66	Ant 2	Ant 3	Ant 0	Ant 1	Ant 2	Ant 3	Ant 0	Ant 1	Ant 2	Ant 0	Ant 1	Ant 2	Ant 3	Ant 0	Ant 1

General Note:

1. The single carrier of inter band CA uplink power level is the same as Non-CA standalone LTE power level.
2. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with FCC RF exposure limit over a defined time window. To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.
3. For LTE inter-band CA mode, Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure between two LTE bands. Smart Transmit algorithm controls the total RF exposure base on LTE inter band ULCA bands to not exceed FCC limit.

5G NR Output Power (Unit: dBm)

General Note:

1. 5G NR n2/n5/n7/n12/n14/n25/n26/n30/n66/n70/n71/n38/n41/n48/n77/n78 is SA mode.
2. 5G NR n2/n5/n7/n12/n25/n26/n66/n71/n38/n41/n77/n78 is NSA mode.
3. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-s QPSK and the reported SAR for the DFT-s QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, for 16QAM/64QAM/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the 16QAM/64QAM/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel
 - d. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested
 - f. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
4. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
5. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
6. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
7. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
8. For 5G NR n77/n78/n41 HPUE, 5G NR n77/n78/n41 PC2 Maximum Duty Cycle is 50%, using FTM (Factory Test Mode) with 50% duty cycle is considered during SAR testing. For 5G NR other bands, using FTM to perform SAR with default 100% transmission.
9. For NR inter-band CA mode, Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure between two NR bands. Smart Transmit algorithm controls the total RF exposure base on NR inter band ULCA bands to not exceed FCC limit.
10. This device supports HPUE mode for 5G NR n41/n77/n78 with higher power. For HPUE power is higher than power class 3 but with lower duty cycle, the maximum average power for class 2 and class 3 is almost the same, so we chose power class 3 full SAR testing and power class 2 verified the worst case of power class 3 SAR.
11. 5G NR n2/25/66/41/48/77/78 supports UL MIMO.
12. The device supports HPUE (power class 2) under SISO mode and HPUE (power class 1.5) under UL MIMO mode for 5G NR n41/n77.

<3GPP 38.101 MPR for EN-DC>
Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0 ²
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM	≤ 2.5		
CP-OFDM	256 QAM	≤ 4.5		
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5	≤ 2.5	
	256 QAM	≤ 4.5		
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

<EN-DC combination>

ENDC	Band	Main TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX
DC_2A_n5A	LTE B2	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	FR1 n5	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
DC_2A_n7A	LTE B2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n7	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_2A_n12A	LTE B2	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	FR1 n12	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
DC_2A_n38A	LTE B2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n38	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_2A_n41A	LTE B2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n41	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_2A_n66A	LTE B2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n66	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_2A_n71A	LTE B2	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	FR1 n71	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
DC_2A_n77A	LTE B2	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
DC_2A_n78A	LTE B2	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n78	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
DC_4A_n2A	LTE B4	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n2	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_4A_n7A	LTE B4	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n7	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_4A_n38A	LTE B4	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n38	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_4A_n41A	LTE B4	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n41	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							



FCC SAR Test Report

Report No. : FA420703

DC_4A_n78A	LTE B4	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n78	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
DC_5A_n2A	LTE B5	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n2	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_5A_n7A	LTE B5	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n7	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_5A_n38A	LTE B5	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n38	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_5A_n41A	LTE B5	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n41	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_5A_n66A	LTE B5	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_5A_n77A	LTE B5	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
DC_5A_n78A	LTE B5	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	FR1 n78	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
DC_7A_n2A	LTE B7	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n2	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_7A_n5A	LTE B7	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	FR1 n5	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
DC_7A_n25A	LTE B7	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n25	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_7A_n26A	LTE B7	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	FR1 n26	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
DC_7A_n66A	LTE B7	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n66	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_7A_n71A	LTE B7	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	FR1 n71	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
DC_7A_n77A	LTE B7	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
DC_7A_n78A	LTE B7	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n78	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
DC_12A_n2A	LTE B12	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n2	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_12A_n7A	LTE B12	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n7	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_12A_n25A	LTE B12	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n25	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_12A_n38A	LTE B12	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n38	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_12A_n41A	LTE B12	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n41	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_12A_n66A	LTE B12	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_12A_n77A	LTE B12	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
DC_12A_n78A	LTE B12	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	FR1 n78	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
DC_13A_n2A	LTE B13	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n2	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_13A_n66A	LTE B13	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_13A_n77A	LTE B13	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
DC_13A_n78A	LTE B13	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	FR1 n78	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							



FCC SAR Test Report

Report No. : FA420703

DC_14A_n2A	LTE B14	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n2	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_14A_n66A	LTE B14	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_14A_n77A	LTE B14	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
DC_25A_n41A	LTE B25	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n41	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_25A_n77A	LTE B25	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
DC_25A_n78A	LTE B25	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n78	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
DC_26A_n25A	LTE B26	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n25	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_26A_n41A	LTE B26	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n41	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_26A_n78A	LTE B26	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	FR1 n78	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
DC_30A_n2A	LTE B30	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n2	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_30A_n5A	LTE B30	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	FR1 n5	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
DC_30A_n66A	LTE B30	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n66	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_30A_n77A	LTE B30	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
DC_38A_n78A	LTE B38	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n78	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
DC_41A_n77A	LTE B41	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
DC_41A_n78A	LTE B41	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n78	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
DC_48A_n2A	LTE B48	Ant 4	Ant 4	Ant 4	Ant 4	Ant 8	Ant 8	Ant 8	Ant 8	Ant 3	Ant 3	Ant 3	Ant 6	Ant 6	Ant 6	Ant 6
	FR1 n2	Ant 2	Ant 3	Ant 0	Ant 1	Ant 2	Ant 3	Ant 0	Ant 1	Ant 2	Ant 0	Ant 1	Ant 2	Ant 3	Ant 0	Ant 1
DC_48A_n5A	LTE B48	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
	FR1 n5	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
DC_48A_n66A	LTE B48	Ant 4	Ant 4	Ant 4	Ant 4	Ant 8	Ant 8	Ant 8	Ant 8	Ant 3	Ant 3	Ant 3	Ant 6	Ant 6	Ant 6	Ant 6
	FR1 n66	Ant 2	Ant 3	Ant 0	Ant 1	Ant 2	Ant 3	Ant 0	Ant 1	Ant 2	Ant 0	Ant 1	Ant 2	Ant 3	Ant 0	Ant 1
DC_48A_n71A	LTE B48	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
	FR1 n71	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
DC_66A_n2A	LTE B66	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n2	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_66A_n5A	LTE B66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	FR1 n5	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
DC_66A_n7A	LTE B66	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n7	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_66A_n12A	LTE B66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	FR1 n12	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
DC_66A_n25A	LTE B66	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n25	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_66A_n38A	LTE B66	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n38	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_66A_n41A	LTE B66	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n41	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
DC_66A_n71A	LTE B66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	FR1 n71	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									



DC_66A_n77A	LTE B66	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
DC_66A_n78A	LTE B66	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n78	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
DC_71A_n2A	LTE B71	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n2	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_71A_n41A	LTE B71	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n41	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_71A_n66A	LTE B71	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
DC_71A_n77A	LTE B71	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
DC_71A_n78A	LTE B71	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	FR1 n78	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							

Inter-Band CA Configuration:

NR Uplink Inter CA	NR Band	Main TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX	Asdiv TX
CA_n2A-n48A	FR1 n2	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n48	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
CA_n2A-n77A	FR1 n2	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
CA_n5A-n48A	FR1 n5	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	FR1 n48	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
CA_n5A-n77A	FR1 n5	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
CA_n12A-n77A	FR1 n12	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
CA_n14A-n77A	FR1 n14	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
CA_n25A-n41A	FR1 n25	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n41	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
CA_n25A-n48A	FR1 n25	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n48	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
CA_n25A-n77A	FR1 n25	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
CA_n26A-n66A	FR1 n26	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
CA_n26A-n70A	FR1 n26	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
	FR1 n70	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
CA_n30A-n77A	FR1 n30	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6
CA_n41A-n66A	FR1 n41	Ant 2	Ant 2	Ant 3	Ant 3	Ant 0	Ant 0	Ant 1	Ant 1							
	FR1 n66	Ant 3	Ant 1	Ant 2	Ant 0	Ant 3	Ant 1	Ant 2	Ant 0							
CA_n41A-n71A	FR1 n41	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	FR1 n71	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
CA_n48A-n66A	FR1 n48	Ant 4	Ant 4	Ant 4	Ant 4	Ant 8	Ant 8	Ant 8	Ant 8	Ant 3	Ant 3	Ant 3	Ant 6	Ant 6	Ant 6	Ant 6
	FR1 n66	Ant 2	Ant 3	Ant 0	Ant 1	Ant 2	Ant 3	Ant 0	Ant 1	Ant 2	Ant 0	Ant 1	Ant 2	Ant 3	Ant 0	Ant 1
CA_n48A-n70A	FR1 n48	Ant 4	Ant 4	Ant 4	Ant 4	Ant 8	Ant 8	Ant 8	Ant 8	Ant 3	Ant 3	Ant 3	Ant 6	Ant 6	Ant 6	Ant 6
	FR1 n70	Ant 2	Ant 3	Ant 0	Ant 1	Ant 2	Ant 3	Ant 0	Ant 1	Ant 2	Ant 0	Ant 1	Ant 2	Ant 3	Ant 0	Ant 1
CA_n48A-n71A	FR1 n48	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6							
	FR1 n71	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1							
CA_n66A-n71A	FR1 n66	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0									
	FR1 n71	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1									
CA_n66A-n77A	FR1 n66	Ant 2	Ant 2	Ant 2	Ant 2	Ant 3	Ant 3	Ant 3	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 0	Ant 0	Ant 0
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6



CA_n70A-n71A	FR1 n70	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 0										
	FR1 n71	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1										
CA_n71A-n77A	FR1 n71	Ant 0	Ant 0	Ant 0	Ant 0	Ant 1	Ant 1	Ant 1	Ant 1								
	FR1 n77	Ant 4	Ant 8	Ant 3	Ant 6	Ant 4	Ant 8	Ant 3	Ant 6								

NR UL MIMO Bands Configuration:

UL MIMO	TX Ant	TX Ant
n2	Ant 0/2	Ant 1/3
n25	Ant 0/2	Ant 1/3
n66	Ant 0/2	Ant 1/3
n41	Ant 0/2	Ant 1/3
n48	Ant 3/4	Ant 6/8
n77	Ant 3/4	Ant 6/8
n78	Ant 3/4	Ant 6/8

<WLAN Conducted Power>


General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration. Additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
6. 802.11 ax/be supports both full tone size mode and partial tone size mode, after verification on partial tone size mode that partial size tone mode power will not be higher than full tone size mode, therefore, full tone mode power was chosen to be measured in this report.
7. The 2.4GHz/5GHz/6GHz WLAN can transmit in MIMO antenna mode.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle are 77.07% as following figure, according to Oct. 2016 TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation

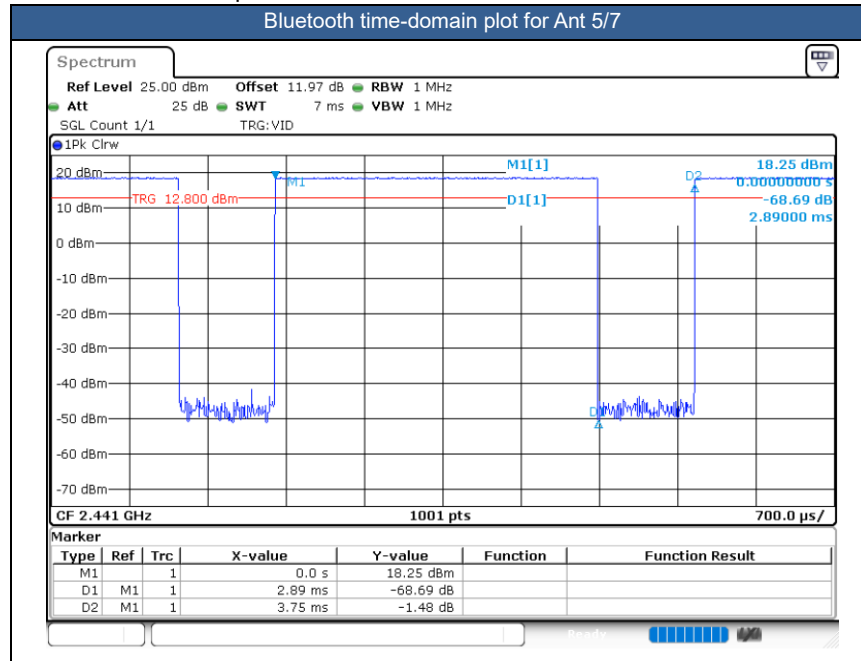



15. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

16. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of BT/WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement of power class 3, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The reported TDD LTE SAR (W/kg) = Measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
 - f. For TDD LTE SAR measurement of power class 2, the duty cycle 1:2.33 (42.9 %) was used perform testing and considering the theoretical duty cycle of 43.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 42.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 43.3%/42.9% = 1.009 is applied to scale-up the measured SAR result. The reported TDD LTE SAR (W/kg) = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The device implements the power management and proximity sensor /receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity) and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. Details about the power management decision and sensor detection are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN/WLAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than 1.2W/kg of GSM1900, WCDMA Band II/IV, LTE Band 2/4/7/25/30/66/38/41/48, 5G NR n2/n7/n25/n30/n66/n70/n38/n41/n48/n78/n77, WLAN2.4/5.2/5.8GHz, Bluetooth, therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
6. Although the headset SAR is greater than 0.8 W/kg, the headset SAR verified the worst of the non-headset SAR and less than non-headset SAR, so there is no need to be tested other channels.
7. According to Nov. 2017 TCB workshop, when the reported 1gSAR for UL CA configuration is < 1.2 W/kg, UL CA 1gSAR is not required for all required test channels (PCC based).
8. The EUT has two work states, flip open and flip close, SAR testing have been evaluated two states. For head mode, only flip open mode is performed SAR testing. When it is in flip close configuration since the diagonal dimension is < 160 mm, 10-g extremity SAR tests are not required. When it is in flip open configuration since the diagonal dimension is > 160 mm and < 200 mm. Therefore, 10-g extremity SAR tests are required when wireless router mode does not apply or if wireless



router 1g SAR > 1.2 W/kg. Additional SAR tests for 10-g extremity SAR were evaluated per KDB 616217 Section 6.

9. As long as either sensor was triggered, conducted power of MIMO mode for ant4 and ant5 could be reduced.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq$ ¼ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq$ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is $\leq$ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are $\leq$ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is > not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is $\leq$ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is > not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is $\leq$ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B2 / B4 / B5 / B17 / B38 SAR test was covered by B25 / B66 / B26 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

5G NR Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - b. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - c. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - d. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not $\frac{1}{2}$ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - e. Smaller bandwidth output power for each RB allocation configuration for this device will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
 - f. For 5G FR1 n5 /n7/n26/n66/n38/n41/n77 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
6. For determination of the scaling factor for report SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. Further simplification chose the worse SAR value and the worst scaling factor from each transmit chain perform reported SAR calculation conservatively. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain.

DSI status description:

The device has the following DSI state which used at different exposure condition.

This WWAN and WLAN/BT bands enabled with Qualcomm Smart Transmit feature which located at chapter 5. The default power is Pmax power, When Plimit power higher than Pmax power, the output power will be limited at Pmax, and so the SAR will use Pmax power to do the testing.

Exposure Condition	Measure Distance	DSI	Ant No.	EUT Flip State	Trigger conditions
Head	touch&tilt 15deg	DSI 2	All ant	Flip Open	Earpiece On
Body worn	5 mm	DSI 3	All ant	Flip Open	Sensor On
Extremity	0mm	DSI 5	Ant2,Ant3,Ant4,Ant5, Ant6,Ant7,Ant8	Flip Open	Sensor On
Extremity	0mm	DSI 6	Ant0,Ant1,Ant2,Ant4,Ant7,Ant8	Flip Open	Sensor On
Hotspot	5 mm	DSI 7	All ant	Flip Open	Hotspot on
Extremity	0mm	DSI 9	Ant0,Ant1	Flip Open	Sensor On
Body worn	5 mm	DSI 10	All ant (Handheld except Ant2,Ant4,Ant7,Ant8)	Flip Close	Sensor On
Hotspot	5 mm	DSI 11	All ant	Flip Close	Hotspot on
Extremity	0mm	DSI 10	All ant (Handheld except Ant2,Ant4,Ant7,Ant8)	Flip Close	Sensor On
Extremity	0mm	DSI 12	Ant2,Ant4,Ant7,Ant8	Flip Close	Sensor On
Body Worn / Extremity / Sensor Off	Sensor Trigger Distance -1mm	DSI 4	All ant	Flip Open/Flip Close	Sensor Off



16.1 Head SAR

<Flip Open>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750 MHz																				
01	LTE Band 71	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	133297	680.5	22.50	24.00	1.413	-	-	-0.14	0.104	0.147
	LTE Band 71	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	133297	680.5	22.50	24.00	1.413	-	-	0.18	0.058	0.082
	LTE Band 71	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	133297	680.5	22.50	24.00	1.413	-	-	-0.16	0.152	0.215
	LTE Band 71	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	133297	680.5	22.50	24.00	1.413	-	-	0.08	0.091	0.129
	LTE Band 71	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	133297	680.5	21.71	23.00	1.346	-	-	-0.02	0.053	0.071
	LTE Band 71	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI 2	133297	680.5	21.71	23.00	1.346	-	-	0.06	0.041	0.055
	LTE Band 71	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	133297	680.5	21.71	23.00	1.346	-	-	-0.04	0.091	0.122
	LTE Band 71	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI 2	133297	680.5	21.71	23.00	1.346	-	-	0.04	0.049	0.066
	LTE Band 71	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	133297	680.5	22.52	24.00	1.406	-	-	-0.1	0.089	0.125
	LTE Band 71	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	133297	680.5	22.52	24.00	1.406	-	-	0.01	0.045	0.063
	LTE Band 71	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	133297	680.5	22.52	24.00	1.406	-	-	-0.15	0.095	0.134
	LTE Band 71	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	133297	680.5	22.52	24.00	1.406	-	-	0.11	0.051	0.072
	LTE Band 71	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	133297	680.5	21.85	23.00	1.303	-	-	0.03	0.071	0.093
	LTE Band 71	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 2	133297	680.5	21.85	23.00	1.303	-	-	0.03	0.028	0.036
	LTE Band 71	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	133297	680.5	21.85	23.00	1.303	-	-	-0.08	0.084	0.109
	LTE Band 71	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	133297	680.5	21.85	23.00	1.303	-	-	0.09	0.039	0.051
02	LTE Band 12	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	23095	707.5	23.05	24.00	1.245	-	-	-0.11	0.125	0.156
	LTE Band 12	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	23095	707.5	23.05	24.00	1.245	-	-	0.14	0.074	0.092
	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	23095	707.5	23.05	24.00	1.245	-	-	-0.17	0.201	0.250
	LTE Band 12	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	23095	707.5	23.05	24.00	1.245	-	-	-0.04	0.116	0.144
	LTE Band 12	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	DSI 2	23095	707.5	22.15	23.00	1.216	-	-	-0.14	0.064	0.078
	LTE Band 12	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	DSI 2	23095	707.5	22.15	23.00	1.216	-	-	0.01	0.037	0.045
	LTE Band 12	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	DSI 2	23095	707.5	22.15	23.00	1.216	-	-	0.15	0.112	0.136
	LTE Band 12	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	DSI 2	23095	707.5	22.15	23.00	1.216	-	-	-0.17	0.069	0.084
	LTE Band 12	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	23095	707.5	22.85	24.00	1.303	-	-	0.03	0.115	0.150
	LTE Band 12	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	23095	707.5	22.85	24.00	1.303	-	-	-0.11	0.075	0.098
	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	23095	707.5	22.85	24.00	1.303	-	-	-0.02	0.191	0.249
	LTE Band 12	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	23095	707.5	22.85	24.00	1.303	-	-	0.1	0.112	0.146
	LTE Band 12	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 1	DSI 2	23095	707.5	22.00	23.00	1.259	-	-	-0.06	0.075	0.094
	LTE Band 12	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 1	DSI 2	23095	707.5	22.00	23.00	1.259	-	-	-0.03	0.050	0.063
	LTE Band 12	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	DSI 2	23095	707.5	22.00	23.00	1.259	-	-	-0.09	0.114	0.144
	LTE Band 12	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 1	DSI 2	23095	707.5	22.00	23.00	1.259	-	-	-0.08	0.070	0.088
03	LTE Band 13	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	23230	782	22.75	24.00	1.334	-	-	0.18	0.052	0.069
	LTE Band 13	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	23230	782	22.75	24.00	1.334	-	-	0.14	0.032	0.043
	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	23230	782	22.75	24.00	1.334	-	-	-0.03	0.095	0.126
	LTE Band 13	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	23230	782	22.75	24.00	1.334	-	-	-0.08	0.041	0.055
	LTE Band 13	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	DSI 2	23230	782	21.80	23.00	1.318	-	-	0.12	0.037	0.049
	LTE Band 13	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	DSI 2	23230	782	21.80	23.00	1.318	-	-	0.04	0.018	0.024
	LTE Band 13	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	DSI 2	23230	782	21.80	23.00	1.318	-	-	-0.01	0.078	0.103
	LTE Band 13	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	DSI 2	23230	782	21.80	23.00	1.318	-	-	-0.06	0.029	0.038
	LTE Band 13	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	23230	782	22.45	24.00	1.429	-	-	0.17	0.071	0.101
	LTE Band 13	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	23230	782	22.45	24.00	1.429	-	-	0.16	0.033	0.047
	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	23230	782	22.45	24.00	1.429	-	-	0.04	0.087	0.124
	LTE Band 13	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	23230	782	22.45	24.00	1.429	-	-	-0.04	0.048	0.069
	LTE Band 13	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 1	DSI 2	23230	782	21.60	23.00	1.380	-	-	0.08	0.060	0.083
	LTE Band 13	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 1	DSI 2	23230	782	21.60	23.00	1.380	-	-	0.11	0.026	0.036
	LTE Band 13	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	DSI 2	23230	782	21.60	23.00	1.380	-	-	-0.11	0.062	0.086
	LTE Band 13	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 1	DSI 2	23230	782	21.60	23.00	1.380	-	-	0.18	0.032	0.044
	LTE Band 14	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	23330	793	22.80	24.00	1.318	-	-	0.13	0.156	0.206



FCC SAR Test Report

Report No. : FA420703

	LTE Band 14	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	23330	793	22.80	24.00	1.318	-	-	0.14	0.113	0.149
04	LTE Band 14	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	23330	793	22.80	24.00	1.318	-	-	0.15	0.229	0.302
	LTE Band 14	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	23330	793	22.80	24.00	1.318	-	-	0.16	0.140	0.185
	LTE Band 14	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	DSI 2	23330	793	21.85	23.00	1.303	-	-	-0.13	0.092	0.120
	LTE Band 14	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	DSI 2	23330	793	21.85	23.00	1.303	-	-	-0.04	0.066	0.086
	LTE Band 14	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	DSI 2	23330	793	21.85	23.00	1.303	-	-	0.04	0.142	0.185
	LTE Band 14	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	DSI 2	23330	793	21.85	23.00	1.303	-	-	0.08	0.081	0.106
	LTE Band 14	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	23330	793	22.49	24.00	1.416	-	-	-0.06	0.151	0.214
	LTE Band 14	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	23330	793	22.49	24.00	1.416	-	-	-0.06	0.108	0.153
	LTE Band 14	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	23330	793	22.49	24.00	1.416	-	-	-0.06	0.211	0.299
	LTE Band 14	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	23330	793	22.49	24.00	1.416	-	-	0.02	0.145	0.205
	LTE Band 14	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 1	DSI 2	23330	793	21.50	23.00	1.413	-	-	0.06	0.091	0.129
	LTE Band 14	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 1	DSI 2	23330	793	21.50	23.00	1.413	-	-	-0.1	0.075	0.106
	LTE Band 14	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	DSI 2	23330	793	21.50	23.00	1.413	-	-	-0.14	0.143	0.202
	LTE Band 14	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 1	DSI 2	23330	793	21.50	23.00	1.413	-	-	0	0.100	0.141
	FR1 n71	20M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	136100	680.5	23.14	24.00	1.219	-	-	0.02	0.071	0.087
	FR1 n71	20M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	136100	680.5	23.14	24.00	1.219	-	-	0.07	0.051	0.062
	FR1 n71	20M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	136100	680.5	23.14	24.00	1.219	-	-	0.16	0.128	0.156
	FR1 n71	20M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	136100	680.5	23.14	24.00	1.219	-	-	-0.17	0.068	0.083
	FR1 n71	20M	QPSK	50	25	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	136100	680.5	23.10	24.00	1.230	-	-	-0.09	0.089	0.109
	FR1 n71	20M	QPSK	50	25	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	136100	680.5	23.10	24.00	1.230	-	-	-0.16	0.054	0.066
05	FR1 n71	20M	QPSK	50	25	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	136100	680.5	23.10	24.00	1.230	-	-	0.04	0.164	0.202
	FR1 n71	20M	QPSK	50	25	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	136100	680.5	23.10	24.00	1.230	-	-	0.13	0.089	0.109
	FR1 n71	20M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	136100	680.5	22.85	24.00	1.303	-	-	0.14	0.067	0.087
	FR1 n71	20M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	136100	680.5	22.85	24.00	1.303	-	-	0.06	0.030	0.039
	FR1 n71	20M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	136100	680.5	22.85	24.00	1.303	-	-	-0.1	0.075	0.098
	FR1 n71	20M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	136100	680.5	22.85	24.00	1.303	-	-	0.06	0.046	0.060
	FR1 n71	20M	QPSK	50	25	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	136100	680.5	22.80	24.00	1.318	-	-	0.07	0.071	0.094
	FR1 n71	20M	QPSK	50	25	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	136100	680.5	22.80	24.00	1.318	-	-	-0.13	0.036	0.047
	FR1 n71	20M	QPSK	50	25	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	136100	680.5	22.80	24.00	1.318	-	-	0.11	0.078	0.103
	FR1 n71	20M	QPSK	50	25	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	136100	680.5	22.80	24.00	1.318	-	-	0.07	0.051	0.067
	FR1 n12	15M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	141500	707.5	23.10	24.00	1.230	-	-	0.09	0.085	0.105
	FR1 n12	15M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	141500	707.5	23.10	24.00	1.230	-	-	0.07	0.056	0.069
06	FR1 n12	15M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	141500	707.5	23.10	24.00	1.230	-	-	-0.03	0.153	0.188
	FR1 n12	15M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	141500	707.5	23.10	24.00	1.230	-	-	0.08	0.091	0.112
	FR1 n12	15M	QPSK	36	22	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	141500	707.5	23.06	24.00	1.242	-	-	0.13	0.073	0.091
	FR1 n12	15M	QPSK	36	22	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	141500	707.5	23.06	24.00	1.242	-	-	0.08	0.052	0.065
	FR1 n12	15M	QPSK	36	22	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	141500	707.5	23.06	24.00	1.242	-	-	0.11	0.137	0.170
	FR1 n12	15M	QPSK	36	22	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	141500	707.5	23.06	24.00	1.242	-	-	0.1	0.085	0.106
	FR1 n12	15M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	141500	707.5	22.90	24.00	1.288	-	-	-0.02	0.071	0.091
	FR1 n12	15M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	141500	707.5	22.90	24.00	1.288	-	-	0.03	0.053	0.068
	FR1 n12	15M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	141500	707.5	22.90	24.00	1.288	-	-	0.09	0.075	0.097
	FR1 n12	15M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	141500	707.5	22.90	24.00	1.288	-	-	0.01	0.030	0.039
	FR1 n12	15M	QPSK	36	22	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	141500	707.5	22.86	24.00	1.300	-	-	-0.07	0.061	0.079
	FR1 n12	15M	QPSK	36	22	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	141500	707.5	22.86	24.00	1.300	-	-	-0.1	0.049	0.064
	FR1 n12	15M	QPSK	36	22	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	141500	707.5	22.86	24.00	1.300	-	-	0.18	0.067	0.087
	FR1 n12	15M	QPSK	36	22	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	141500	707.5	22.86	24.00	1.300	-	-	-0.05	0.026	0.034
	FR1 n14	10M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	158600	793	23.37	24.00	1.156	-	-	0.01	0.109	0.126
	FR1 n14	10M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	158600	793	23.37	24.00	1.156	-	-	-0.16	0.084	0.097
	FR1 n14	10M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	158600	793	23.37	24.00	1.156	-	-	0.13	0.119	0.138
	FR1 n14	10M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	158600	793	23.37	24.00	1.156	-	-	-0.18	0.094	0.109
	FR1 n14	10M	QPSK	25	14	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	158600	793	23.26	24.00	1.186	-	-	0.17	0.115	0.136
	FR1 n14	10M	QPSK	25	14	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	158600	793	23.26	24.00	1.186	-	-	-0.17	0.085	0.101
07	FR1 n14	10M	QPSK	25	14	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	158600	793	23.26	24.00	1.186	-	-	0.02	0.121	0.143
	FR1 n14	10M	QPSK	25	14	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	158600	793	23.26	24.00	1.186	-	-	0	0.106	0.126
	FR1 n14	10M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	158600	793	23.07	24.00	1.239	-	-	0.12	0.098	0.121



FCC SAR Test Report

Report No. : FA420703

	FR1 n14	10M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	158600	793	23.07	24.00	1.239	-	-	0.18	0.081	0.100
	FR1 n14	10M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	158600	793	23.07	24.00	1.239	-	-	0.01	0.112	0.139
	FR1 n14	10M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	158600	793	23.07	24.00	1.239	-	-	0.06	0.060	0.074
	FR1 n14	10M	QPSK	25	14	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	158600	793	22.96	24.00	1.271	-	-	0.16	0.108	0.137
	FR1 n14	10M	QPSK	25	14	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	158600	793	22.96	24.00	1.271	-	-	0.15	0.086	0.109
	FR1 n14	10M	QPSK	25	14	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	158600	793	22.96	24.00	1.271	-	-	-0.15	0.108	0.137
	FR1 n14	10M	QPSK	25	14	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	158600	793	22.96	24.00	1.271	-	-	-0.12	0.062	0.079
835 MHz																				
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Right Cheek	0mm	Ant 0	DSI 2	189	836.4	27.90	28.80	1.230	-	-	0.12	0.071	0.087
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Right Tilted	0mm	Ant 0	DSI 2	189	836.4	27.90	28.80	1.230	-	-	0.06	0.021	0.026
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Left Cheek	0mm	Ant 0	DSI 2	189	836.4	27.90	28.80	1.230	-	-	0.1	0.119	0.146
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Left Tilted	0mm	Ant 0	DSI 2	189	836.4	27.90	28.80	1.230	-	-	0.03	0.059	0.073
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Left Cheek	0mm	Ant 0	DSI 2	128	824.2	27.79	28.80	1.262	-	-	-0.16	0.123	0.155
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Left Cheek	0mm	Ant 0	DSI 2	251	848.8	27.87	28.80	1.239	-	-	-0.09	0.130	0.161
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Right Cheek	0mm	Ant 1	DSI 2	189	836.4	27.75	28.80	1.274	-	-	-0.15	0.069	0.088
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Right Tilted	0mm	Ant 1	DSI 2	189	836.4	27.75	28.80	1.274	-	-	0.15	0.045	0.057
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Left Cheek	0mm	Ant 1	DSI 2	189	836.4	27.75	28.80	1.274	-	-	0.11	0.120	0.153
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Left Tilted	0mm	Ant 1	DSI 2	189	836.4	27.75	28.80	1.274	-	-	0.04	0.062	0.079
08	GSM850	-	-	-	-	GPRS (3 Tx slots)	Left Cheek	0mm	Ant 1	DSI 2	128	824.2	27.50	28.80	1.349	-	-	-0.02	0.165	0.223
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Left Cheek	0mm	Ant 1	DSI 2	251	848.8	27.70	28.80	1.288	-	-	-0.09	0.157	0.202
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	4182	836.4	23.43	24.00	1.140	-	-	0.02	0.156	0.178
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 2	4182	836.4	23.43	24.00	1.140	-	-	0.01	0.101	0.115
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	4182	836.4	23.43	24.00	1.140	-	-	-0.18	0.225	0.257
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 2	4182	836.4	23.43	24.00	1.140	-	-	-0.08	0.151	0.172
09	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	4132	826.4	23.38	24.00	1.153	-	-	0.03	0.239	0.276
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	4233	846.6	23.37	24.00	1.156	-	-	-0.17	0.220	0.254
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	DSI 2	4182	836.4	23.32	24.00	1.169	-	-	0.07	0.148	0.173
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 1	DSI 2	4182	836.4	23.32	24.00	1.169	-	-	0.13	0.089	0.104
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI 2	4182	836.4	23.32	24.00	1.169	-	-	-0.12	0.123	0.144
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 1	DSI 2	4182	836.4	23.32	24.00	1.169	-	-	0.06	0.070	0.082
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	DSI 2	4132	826.4	23.29	24.00	1.178	-	-	0.01	0.150	0.177
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	DSI 2	4233	846.6	23.27	24.00	1.183	-	-	0.13	0.114	0.135
	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	26865	831.5	22.77	24.00	1.327	-	-	0.09	0.147	0.195
	LTE Band 26	15M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	26865	831.5	22.77	24.00	1.327	-	-	0.14	0.108	0.143
10	LTE Band 26	15M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	26865	831.5	22.77	24.00	1.327	-	-	-0.16	0.247	0.328
	LTE Band 5B	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	20575+ 20476	841.5+ 831.6	22.69	24.00	1.352	-	-	-0.14	0.235	0.318
	LTE Band 26	15M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	26865	831.5	22.77	24.00	1.327	-	-	-0.14	0.137	0.182
	LTE Band 26	15M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	26765	821.5	22.76	24.00	1.330	-	-	0.05	0.240	0.319
	LTE Band 26	15M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	26965	841.5	22.74	24.00	1.337	-	-	-0.16	0.216	0.289
	LTE Band 26	15M	QPSK	36	0	-	Right Cheek	0mm	Ant 0	DSI 2	26865	831.5	21.88	23.00	1.294	-	-	-0.14	0.077	0.100
	LTE Band 26	15M	QPSK	36	0	-	Right Tilted	0mm	Ant 0	DSI 2	26865	831.5	21.88	23.00	1.294	-	-	-0.09	0.058	0.075
	LTE Band 26	15M	QPSK	36	0	-	Left Cheek	0mm	Ant 0	DSI 2	26865	831.5	21.88	23.00	1.294	-	-	0.14	0.124	0.160
	LTE Band 26	15M	QPSK	36	0	-	Left Tilted	0mm	Ant 0	DSI 2	26865	831.5	21.88	23.00	1.294	-	-	0.14	0.076	0.098
	LTE Band 26	15M	QPSK	36	0	-	Left Cheek	0mm	Ant 0	DSI 2	26765	821.5	21.86	23.00	1.300	-	-	-0.06	0.143	0.186
	LTE Band 26	15M	QPSK	36	0	-	Left Cheek	0mm	Ant 0	DSI 2	26965	841.5	21.79	23.00	1.321	-	-	-0.17	0.136	0.180
	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	26865	831.5	22.66	24.00	1.361	-	-	0.13	0.136	0.185
	LTE Band 26	15M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	26865	831.5	22.66	24.00	1.361	-	-	0.13	0.089	0.121
	LTE Band 26	15M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	26865	831.5	22.66	24.00	1.361	-	-	0.04	0.100	0.136
	LTE Band 26	15M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	26865	831.5	22.66	24.00	1.361	-	-	-0.12	0.059	0.080
	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	26765	821.5	22.63	24.00	1.371	-	-	-0.09	0.136	0.186
	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	26965	841.5	22.51	24.00	1.409	-	-	0.05	0.143	0.202
	LTE Band 5B	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	20575+ 20476	841.5+ 831.6	22.59	24.00	1.384	-	-	0.09	0.134	0.185
	LTE Band 26	15M	QPSK	36	0	-	Right Cheek	0mm	Ant 1	DSI 2	26865	831.5	21.69	23.00	1.352	-	-	-0.01	0.074	0.100
	LTE Band 26	15M	QPSK	36	0	-	Right Tilted	0mm	Ant 1	DSI 2	26865	831.5	21.69	23.00	1.352	-	-	0.16	0.049	0.066
	LTE Band 26	15M	QPSK	36	0	-	Left Cheek	0mm	Ant 1	DSI 2	26865	831.5	21.69	23.00	1.352	-	-	-0.15	0.064	0.087



FCC SAR Test Report

Report No. : FA420703

	LTE Band 26	15M	QPSK	36	0	-	Left Tilted	0mm	Ant 1	DSI 2	26865	831.5	21.69	23.00	1.352	-	-	0.05	0.036	0.049
	LTE Band 26	15M	QPSK	36	0	-	Right Cheek	0mm	Ant 1	DSI 2	26765	821.5	21.65	23.00	1.365	-	-	0.04	0.077	0.105
	LTE Band 26	15M	QPSK	36	0	-	Right Cheek	0mm	Ant 1	DSI 2	26965	841.5	21.63	23.00	1.371	-	-	-0.09	0.080	0.110
	FR1 n26	20M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	166300	831.5	23.01	24.00	1.256	-	-	-0.11	0.120	0.151
	FR1 n26	20M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	166300	831.5	23.01	24.00	1.256	-	-	-0.03	0.087	0.109
11	FR1 n26	20M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	166300	831.5	23.01	24.00	1.256	-	-	0.11	0.130	0.163
	FR1 n26	20M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	166300	831.5	23.01	24.00	1.256	-	-	-0.16	0.115	0.144
	FR1 n26	20M	QPSK	50	28	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	166300	831.5	22.88	24.00	1.294	-	-	-0.01	0.110	0.142
	FR1 n26	20M	QPSK	50	28	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	166300	831.5	22.88	24.00	1.294	-	-	-0.15	0.075	0.097
	FR1 n26	20M	QPSK	50	28	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	166300	831.5	22.88	24.00	1.294	-	-	0	0.123	0.159
	FR1 n26	20M	QPSK	50	28	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	166300	831.5	22.88	24.00	1.294	-	-	0.02	0.101	0.131
	FR1 n26	20M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	166300	831.5	22.87	24.00	1.297	-	-	-0.1	0.100	0.130
	FR1 n26	20M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	166300	831.5	22.87	24.00	1.297	-	-	-0.1	0.067	0.087
	FR1 n26	20M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	166300	831.5	22.87	24.00	1.297	-	-	0.16	0.082	0.106
	FR1 n26	20M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	166300	831.5	22.87	24.00	1.297	-	-	0.16	0.049	0.064
	FR1 n26	20M	QPSK	50	28	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	166300	831.5	22.74	24.00	1.337	-	-	0	0.096	0.128
	FR1 n26	20M	QPSK	50	28	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	166300	831.5	22.74	24.00	1.337	-	-	-0.04	0.064	0.086
	FR1 n26	20M	QPSK	50	28	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	166300	831.5	22.74	24.00	1.337	-	-	0.06	0.079	0.106
	FR1 n26	20M	QPSK	50	28	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	166300	831.5	22.74	24.00	1.337	-	-	0.11	0.047	0.063
1750 MHz																				
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	1413	1732.6	23.40	24.00	1.148	-	-	0.15	0.094	0.108
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 2	1413	1732.6	23.40	24.00	1.148	-	-	0.06	0.031	0.036
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	1413	1732.6	23.40	24.00	1.148	-	-	0.01	0.057	0.065
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 2	1413	1732.6	23.40	24.00	1.148	-	-	-0.09	0.025	0.029
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	1312	1712.4	23.34	24.00	1.164	-	-	0.02	0.061	0.071
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	1513	1752.6	23.20	24.00	1.202	-	-	-0.17	0.083	0.100
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 2	DSI 2	1413	1732.6	18.50	19.30	1.202	-	-	0.17	0.930	1.118
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 2	DSI 2	1413	1732.6	18.50	19.30	1.202	-	-	0.04	0.224	0.269
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 2	DSI 2	1413	1732.6	18.50	19.30	1.202	-	-	0.16	0.484	0.582
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 2	DSI 2	1413	1732.6	18.50	19.30	1.202	-	-	-0.17	0.128	0.154
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 2	DSI 2	1312	1712.4	18.38	19.30	1.236	-	-	0.01	0.950	1.174
12	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 2	DSI 2	1513	1752.6	18.33	19.30	1.250	-	-	0.16	0.974	1.218
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	132322	1745	23.55	24.00	1.109	-	-	0.04	0.059	0.065
	LTE Band 66C	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	132322+ 132520	1745+ 1764.8	23.48	24.00	1.127	-	-	-0.01	0.046	0.052
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	132322	1745	23.55	24.00	1.109	-	-	0.06	0.021	0.023
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	132322	1745	23.55	24.00	1.109	-	-	0.01	0.037	0.041
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	132322	1745	23.55	24.00	1.109	-	-	0.09	0.013	0.014
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	132072	1720	23.47	24.00	1.130	-	-	0.05	0.046	0.052
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	132572	1770	23.43	24.00	1.140	-	-	0.16	0.054	0.062
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	132322	1745	22.53	23.00	1.114	-	-	0.1	0.051	0.057
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI 2	132322	1745	22.53	23.00	1.114	-	-	0.01	0.042	0.047
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	132322	1745	22.53	23.00	1.114	-	-	0.06	0.031	0.035
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI 2	132322	1745	22.53	23.00	1.114	-	-	0.08	0.021	0.023
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	132072	1720	22.48	23.00	1.127	-	-	-0.09	0.043	0.048
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	132572	1770	22.47	23.00	1.130	-	-	-0.1	0.051	0.058
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	132322	1745	23.42	24.00	1.143	-	-	0.12	0.150	0.171
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	132322	1745	23.42	24.00	1.143	-	-	-0.04	0.086	0.098
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	132322	1745	23.42	24.00	1.143	-	-	0.14	0.099	0.113
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	132322	1745	23.42	24.00	1.143	-	-	0.1	0.081	0.093
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	132072	1720	23.39	24.00	1.151	-	-	-0.16	0.114	0.131
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	132572	1770	23.40	24.00	1.148	-	-	-0.15	0.172	0.197
	LTE Band 66C	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	132572+ 132374	1770+ 1750.2	23.26	24.00	1.186	-	-	-0.13	0.164	0.194
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	132322	1745	22.42	23.00	1.143	-	-	0.02	0.088	0.101
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 2	132322	1745	22.42	23.00	1.143	-	-	0.11	0.050	0.057
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	132322	1745	22.42	23.00	1.143	-	-	0.05	0.058	0.066



FCC SAR Test Report

Report No. : FA420703

	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	132322	1745	22.42	23.00	1.143	-	-	-0.02	0.048	0.055
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	132072	1720	22.41	23.00	1.146	-	-	0.13	0.084	0.096
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	132572	1770	22.38	23.00	1.153	-	-	0.04	0.093	0.107
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	132322	1745	17.77	18.80	1.268	-	-	0.06	0.770	0.976
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 2	DSI 2	132322	1745	17.77	18.80	1.268	-	-	-0.17	0.166	0.210
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	132322	1745	17.77	18.80	1.268	-	-	0.02	0.343	0.435
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 2	DSI 2	132322	1745	17.77	18.80	1.268	-	-	-0.15	0.095	0.120
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	132072	1720	17.70	18.80	1.288	-	-	-0.02	0.848	1.092
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	132572	1770	17.69	18.80	1.291	-	-	-0.08	0.864	1.116
	LTE Band 66C	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	132572+ 132374	1770+ 1750.2	17.51	18.80	1.346	-	-	-0.16	0.816	1.098
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	132322	1745	17.72	18.80	1.282	-	-	0.05	0.686	0.880
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 2	DSI 2	132322	1745	17.72	18.80	1.282	-	-	0.15	0.148	0.190
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 2	132322	1745	17.72	18.80	1.282	-	-	0.03	0.306	0.392
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 2	DSI 2	132322	1745	17.72	18.80	1.282	-	-	0.08	0.085	0.109
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	132072	1720	17.68	18.80	1.294	-	-	-0.03	0.756	0.978
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	132572	1770	17.67	18.80	1.297	-	-	0.15	0.770	0.999
	LTE Band 66	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 2	DSI 2	132322	1745	17.70	18.80	1.288	-	-	0.09	0.750	0.966
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	132322	1745	18.50	19.80	1.349	-	-	0.11	0.802	1.082
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	132322	1745	18.50	19.80	1.349	-	-	0.11	0.785	1.059
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 3	DSI 2	132322	1745	18.50	19.80	1.349	-	-	-0.17	0.416	0.561
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 3	DSI 2	132322	1745	18.50	19.80	1.349	-	-	-0.06	0.469	0.633
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	132072	1720	18.39	19.80	1.384	-	-	0.12	0.799	1.105
13	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	132572	1770	18.43	19.80	1.371	-	-	0.04	0.930	1.275
	LTE Band 66C	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	132572+ 132374	1770+ 1750.2	18.14	19.80	1.466	-	-	0.13	0.801	1.174
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	132072	1720	18.39	19.80	1.384	-	-	0.06	0.746	1.032
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	132572	1770	18.43	19.80	1.371	-	-	0.01	0.861	1.180
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	132322	1745	18.45	19.80	1.365	-	-	-0.03	0.752	1.026
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	132322	1745	18.45	19.80	1.365	-	-	0	0.705	0.962
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	DSI 2	132322	1745	18.45	19.80	1.365	-	-	-0.07	0.356	0.486
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 3	DSI 2	132322	1745	18.45	19.80	1.365	-	-	-0.1	0.409	0.558
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	132072	1720	18.37	19.80	1.390	-	-	-0.04	0.729	1.013
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	132572	1770	18.40	19.80	1.380	-	-	-0.11	0.910	1.256
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	132072	1720	18.37	19.80	1.390	-	-	0.06	0.689	0.958
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	132572	1770	18.40	19.80	1.380	-	-	0.08	0.850	1.173
	LTE Band 66	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	DSI 2	132322	1745	18.44	19.80	1.368	-	-	-0.13	0.788	1.078
	LTE Band 66	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 3	DSI 2	132322	1745	18.44	19.80	1.368	-	-	-0.14	0.712	0.974
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	349000	1745	23.00	24.00	1.259	-	-	0.02	0.067	0.084
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	349000	1745	23.00	24.00	1.259	-	-	0.09	0.026	0.033
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	349000	1745	23.00	24.00	1.259	-	-	0.01	0.042	0.053
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	349000	1745	23.00	24.00	1.259	-	-	0.05	0.019	0.024
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	349000	1745	22.90	24.00	1.288	-	-	0.09	0.058	0.075
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	349000	1745	22.90	24.00	1.288	-	-	-0.07	0.021	0.027
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	349000	1745	22.90	24.00	1.288	-	-	0.05	0.039	0.050
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	349000	1745	22.90	24.00	1.288	-	-	0.01	0.015	0.019
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	349000	1745	23.06	24.00	1.242	-	-	0.09	0.072	0.089
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	349000	1745	23.06	24.00	1.242	-	-	0.01	0.037	0.046
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	349000	1745	23.06	24.00	1.242	-	-	0.09	0.051	0.063
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	349000	1745	23.06	24.00	1.242	-	-	-0.06	0.028	0.035
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	349000	1745	23.05	24.00	1.245	-	-	0.07	0.084	0.105
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	349000	1745	23.05	24.00	1.245	-	-	-0.07	0.044	0.055
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	349000	1745	23.05	24.00	1.245	-	-	0.1	0.057	0.071
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	349000	1745	23.05	24.00	1.245	-	-	-0.07	0.035	0.044
14	FR1 n66	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 2	DSI 2	349000	1745	19.94	20.50	1.138	-	-	-0.12	1.000	1.138
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 2	DSI 2	349000	1745	19.94	20.50	1.138	-	-	-0.13	0.239	0.272
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 2	DSI 2	349000	1745	19.94	20.50	1.138	-	-	0.18	0.481	0.547



FCC SAR Test Report

Report No. : FA420703

	FR1 n66	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 2	DSI 2	349000	1745	19.94	20.50	1.138	-	-	-0.05	0.135	0.154
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 2	DSI 2	349000	1745	19.86	20.50	1.159	-	-	0.16	0.981	1.137
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 2	DSI 2	349000	1745	19.86	20.50	1.159	-	-	-0.05	0.206	0.239
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 2	DSI 2	349000	1745	19.86	20.50	1.159	-	-	-0.04	0.486	0.563
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 2	DSI 2	349000	1745	19.86	20.50	1.159	-	-	-0.11	0.115	0.133
	FR1 n66	40M	QPSK	216	0	DFT-15	Right Cheek	0mm	Ant 2	DSI 2	349000	1745	19.78	20.50	1.180	-	-	-0.14	0.955	1.127
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	349000	1745	19.93	21.00	1.279	-	-	0.18	0.888	1.136
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	349000	1745	19.93	21.00	1.279	-	-	-0.13	0.870	1.113
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 3	DSI 2	349000	1745	19.93	21.00	1.279	-	-	0.18	0.371	0.475
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 3	DSI 2	349000	1745	19.93	21.00	1.279	-	-	0.08	0.515	0.659
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	349000	1745	19.87	21.00	1.297	-	-	-0.11	0.807	1.047
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	349000	1745	19.87	21.00	1.297	-	-	0	0.791	1.026
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 3	DSI 2	349000	1745	19.87	21.00	1.297	-	-	-0.17	0.384	0.498
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 3	DSI 2	349000	1745	19.87	21.00	1.297	-	-	0.11	0.488	0.633
	FR1 n66	40M	QPSK	216	0	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	349000	1745	19.76	21.00	1.330	-	-	0.06	0.845	1.124
	FR1 n66	40M	QPSK	216	0	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	349000	1745	19.76	21.00	1.330	-	-	0.18	0.823	1.095
	FR1 n70	15M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	340500	1702.5	23.70	24.00	1.072	-	-	-0.04	0.061	0.065
	FR1 n70	15M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	340500	1702.5	23.70	24.00	1.072	-	-	0.06	0.026	0.028
	FR1 n70	15M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	340500	1702.5	23.70	24.00	1.072	-	-	0.01	0.034	0.036
	FR1 n70	15M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	340500	1702.5	23.70	24.00	1.072	-	-	0.08	0.016	0.017
	FR1 n70	15M	QPSK	36	22	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	340500	1702.5	23.66	24.00	1.081	-	-	-0.09	0.058	0.063
	FR1 n70	15M	QPSK	36	22	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	340500	1702.5	23.66	24.00	1.081	-	-	-0.07	0.025	0.027
	FR1 n70	15M	QPSK	36	22	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	340500	1702.5	23.66	24.00	1.081	-	-	0.06	0.031	0.034
	FR1 n70	15M	QPSK	36	22	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	340500	1702.5	23.66	24.00	1.081	-	-	0.01	0.012	0.013
	FR1 n70	15M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	340500	1702.5	23.00	24.00	1.259	-	-	0.11	0.047	0.059
	FR1 n70	15M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	340500	1702.5	23.00	24.00	1.259	-	-	0.1	0.026	0.033
	FR1 n70	15M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	340500	1702.5	23.00	24.00	1.259	-	-	-0.07	0.041	0.052
	FR1 n70	15M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	340500	1702.5	23.00	24.00	1.259	-	-	0.07	0.016	0.020
	FR1 n70	15M	QPSK	36	22	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	340500	1702.5	22.92	24.00	1.282	-	-	0.11	0.045	0.058
	FR1 n70	15M	QPSK	36	22	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	340500	1702.5	22.92	24.00	1.282	-	-	-0.11	0.025	0.032
	FR1 n70	15M	QPSK	36	22	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	340500	1702.5	22.92	24.00	1.282	-	-	-0.15	0.038	0.049
	FR1 n70	15M	QPSK	36	22	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	340500	1702.5	22.92	24.00	1.282	-	-	0.06	0.015	0.019
15	FR1 n70	15M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 2	DSI 2	340500	1702.5	18.87	19.50	1.156	-	-	0.02	1.040	1.202
	FR1 n70	15M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 2	DSI 2	340500	1702.5	18.87	19.50	1.156	-	-	-0.08	0.225	0.260
	FR1 n70	15M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 2	DSI 2	340500	1702.5	18.87	19.50	1.156	-	-	0.09	0.444	0.513
	FR1 n70	15M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 2	DSI 2	340500	1702.5	18.87	19.50	1.156	-	-	0.01	0.127	0.147
	FR1 n70	15M	QPSK	36	22	DFT-15	Right Cheek	0mm	Ant 2	DSI 2	340500	1702.5	18.74	19.50	1.191	-	-	0.02	0.927	1.104
	FR1 n70	15M	QPSK	36	22	DFT-15	Right Tilted	0mm	Ant 2	DSI 2	340500	1702.5	18.74	19.50	1.191	-	-	0.02	0.201	0.239
	FR1 n70	15M	QPSK	36	22	DFT-15	Left Cheek	0mm	Ant 2	DSI 2	340500	1702.5	18.74	19.50	1.191	-	-	-0.03	0.396	0.472
	FR1 n70	15M	QPSK	36	22	DFT-15	Left Tilted	0mm	Ant 2	DSI 2	340500	1702.5	18.74	19.50	1.191	-	-	0.11	0.113	0.135
	FR1 n70	15M	QPSK	75	0	DFT-15	Right Cheek	0mm	Ant 2	DSI 2	340500	1702.5	18.66	19.50	1.213	-	-	-0.11	0.988	1.199
	FR1 n70	15M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	340500	1702.5	18.76	19.50	1.186	-	-	0.13	0.912	1.081
	FR1 n70	15M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	340500	1702.5	18.76	19.50	1.186	-	-	-0.11	0.886	1.051
	FR1 n70	15M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 3	DSI 2	340500	1702.5	18.76	19.50	1.186	-	-	-0.15	0.376	0.446
	FR1 n70	15M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 3	DSI 2	340500	1702.5	18.76	19.50	1.186	-	-	0.07	0.459	0.544
	FR1 n70	15M	QPSK	36	22	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	340500	1702.5	18.61	19.50	1.227	-	-	0.17	0.904	1.110
	FR1 n70	15M	QPSK	36	22	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	340500	1702.5	18.61	19.50	1.227	-	-	-0.08	0.860	1.056
	FR1 n70	15M	QPSK	36	22	DFT-15	Left Cheek	0mm	Ant 3	DSI 2	340500	1702.5	18.61	19.50	1.227	-	-	0.03	0.354	0.435
	FR1 n70	15M	QPSK	36	22	DFT-15	Left Tilted	0mm	Ant 3	DSI 2	340500	1702.5	18.61	19.50	1.227	-	-	-0.11	0.437	0.536
	FR1 n70	15M	QPSK	75	0	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	340500	1702.5	18.46	19.50	1.271	-	-	0.06	0.813	1.033
	FR1 n70	15M	QPSK	75	0	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	340500	1702.5	18.46	19.50	1.271	-	-	-0.15	0.790	1.004
1900 MHz																				
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Right Cheek	0mm	Ant 0	DSI 2	512	1850.2	25.29	25.80	1.125	-	-	0.02	0.054	0.061
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Right Tilted	0mm	Ant 0	DSI 2	512	1850.2	25.29	25.80	1.125	-	-	0.06	0.026	0.029
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Left Cheek	0mm	Ant 0	DSI 2	512	1850.2	25.29	25.80	1.125	-	-	0.01	0.038	0.043
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Left Tilted	0mm	Ant 0	DSI 2	512	1850.2	25.29	25.80	1.125	-	-	-0.7	0.018	0.020



FCC SAR Test Report

Report No. : FA420703

	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Right Cheek	0mm	Ant 0	DSI 2	661	1880	25.40	25.80	1.096	-	-	-0.15	0.048	0.053
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Right Cheek	0mm	Ant 0	DSI 2	810	1909.8	25.36	25.80	1.107	-	-	0.13	0.039	0.043
16	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Right Cheek	0mm	Ant 2	DSI 2	512	1850.2	22.30	23.30	1.259	-	-	0.02	0.817	1.029
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Right Tilted	0mm	Ant 2	DSI 2	512	1850.2	22.30	23.30	1.259	-	-	-0.02	0.184	0.232
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Left Cheek	0mm	Ant 2	DSI 2	512	1850.2	22.30	23.30	1.259	-	-	0.09	0.407	0.512
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Left Tilted	0mm	Ant 2	DSI 2	512	1850.2	22.30	23.30	1.259	-	-	-0.06	0.134	0.169
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Right Cheek	0mm	Ant 2	DSI 2	661	1880	22.15	23.30	1.303	-	-	0.06	0.692	0.902
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Right Cheek	0mm	Ant 2	DSI 2	810	1909.8	22.26	23.30	1.271	-	-	0.1	0.770	0.978
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	9400	1880	23.10	24.00	1.230	-	-	0.03	0.095	0.117
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 2	9400	1880	23.10	24.00	1.230	-	-	0.03	0.045	0.055
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	9400	1880	23.10	24.00	1.230	-	-	0.05	0.058	0.071
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 2	9400	1880	23.10	24.00	1.230	-	-	0.07	0.037	0.046
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	9262	1852.4	23.08	24.00	1.236	-	-	-0.08	0.103	0.127
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	9538	1907.6	22.97	24.00	1.268	-	-	0.07	0.098	0.124
17	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 2	DSI 2	9262	1852.4	18.20	18.90	1.175	-	-	0.15	0.999	1.174
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 2	DSI 2	9262	1852.4	18.20	18.90	1.175	-	-	-0.13	0.216	0.254
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 2	DSI 2	9262	1852.4	18.20	18.90	1.175	-	-	-0.15	0.518	0.609
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 2	DSI 2	9262	1852.4	18.20	18.90	1.175	-	-	-0.01	0.141	0.166
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 2	DSI 2	9400	1880	18.04	18.90	1.219	-	-	-0.05	0.940	1.146
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 2	DSI 2	9538	1907.6	18.11	18.90	1.199	-	-	0.01	0.831	0.997
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	26590	1905	23.85	24.00	1.035	-	-	0.01	0.074	0.077
	LTE Band 25	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	26590	1905	23.85	24.00	1.035	-	-	0.06	0.041	0.042
	LTE Band 25	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	26590	1905	23.85	24.00	1.035	-	-	0.01	0.058	0.060
	LTE Band 25	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	26590	1905	23.85	24.00	1.035	-	-	-0.09	0.037	0.038
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	26140	1860	23.75	24.00	1.059	-	-	-0.09	0.065	0.069
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	26340	1880	23.77	24.00	1.054	-	-	0.01	0.068	0.072
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	26590	1905	22.73	23.00	1.064	-	-	-0.16	0.070	0.074
	LTE Band 25	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI 2	26590	1905	22.73	23.00	1.064	-	-	0.01	0.034	0.036
	LTE Band 25	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	26590	1905	22.73	23.00	1.064	-	-	0.06	0.051	0.054
	LTE Band 25	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI 2	26590	1905	22.73	23.00	1.064	-	-	0.09	0.031	0.033
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	26140	1860	22.63	23.00	1.089	-	-	-0.06	0.061	0.066
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	26340	1880	22.69	23.00	1.074	-	-	0.06	0.064	0.069
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	26590	1905	23.77	24.00	1.054	-	-	0.06	0.133	0.140
	LTE Band 25	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	26590	1905	23.77	24.00	1.054	-	-	-0.07	0.070	0.074
	LTE Band 25	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	26590	1905	23.77	24.00	1.054	-	-	0.09	0.084	0.089
	LTE Band 25	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	26590	1905	23.77	24.00	1.054	-	-	-0.03	0.067	0.071
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	26140	1860	23.74	24.00	1.062	-	-	-0.12	0.114	0.121
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	26340	1880	23.76	24.00	1.057	-	-	-0.05	0.122	0.129
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	26590	1905	22.75	23.00	1.059	-	-	-0.11	0.079	0.084
	LTE Band 25	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 2	26590	1905	22.75	23.00	1.059	-	-	0.02	0.041	0.043
	LTE Band 25	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	26590	1905	22.75	23.00	1.059	-	-	-0.07	0.048	0.051
	LTE Band 25	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	26590	1905	22.75	23.00	1.059	-	-	0	0.036	0.038
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	26140	1860	22.69	23.00	1.074	-	-	0.14	0.072	0.077
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	26340	1880	22.65	23.00	1.084	-	-	-0.15	0.077	0.083
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	26590	1905	17.65	18.50	1.216	-	-	-0.15	0.892	1.085
	LTE Band 25	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 2	DSI 2	26590	1905	17.65	18.50	1.216	-	-	0.09	0.232	0.282
	LTE Band 25	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	26590	1905	17.65	18.50	1.216	-	-	0.08	0.413	0.502
	LTE Band 25	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 2	DSI 2	26590	1905	17.65	18.50	1.216	-	-	0.08	0.134	0.163
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	26140	1860	17.62	18.50	1.225	-	-	-0.13	0.946	1.158
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	26340	1880	17.61	18.50	1.227	-	-	0.01	0.915	1.123
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	26590	1905	17.62	18.50	1.225	-	-	-0.01	0.872	1.068
	LTE Band 25	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 2	DSI 2	26590	1905	17.62	18.50	1.225	-	-	0.02	0.222	0.272
	LTE Band 25	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 2	26590	1905	17.62	18.50	1.225	-	-	-0.13	0.393	0.481
	LTE Band 25	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 2	DSI 2	26590	1905	17.62	18.50	1.225	-	-	-0.16	0.054	0.066
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	26140	1860	17.58	18.50	1.236	-	-	0.09	0.916	1.132
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	26340	1880	17.53	18.50	1.250	-	-	-0.08	0.875	1.094



FCC SAR Test Report

Report No. : FA420703

	LTE Band 25	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 2	DSI 2	26590	1905	17.55	18.50	1.245	-	-	0.03	0.868	1.080
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	26590	1905	18.21	19.50	1.346	-	-	-0.06	0.820	1.104
	LTE Band 25	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	26590	1905	18.21	19.50	1.346	-	-	0.02	0.785	1.057
	LTE Band 25	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 3	DSI 2	26590	1905	18.21	19.50	1.346	-	-	0.1	0.389	0.524
	LTE Band 25	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 3	DSI 2	26590	1905	18.21	19.50	1.346	-	-	-0.1	0.438	0.589
	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	26140	1860	18.17	19.50	1.358	-	-	0	0.825	1.121
18	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	26340	1880	18.15	19.50	1.365	-	-	-0.03	0.905	1.235
	LTE Band 25	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	26140	1860	18.17	19.50	1.358	-	-	0.06	0.735	0.998
	LTE Band 25	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	26340	1880	18.15	19.50	1.365	-	-	0.01	0.831	1.134
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	26590	1905	18.17	19.50	1.358	-	-	0.1	0.750	1.019
	LTE Band 25	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	26590	1905	18.17	19.50	1.358	-	-	0.11	0.685	0.930
	LTE Band 25	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	DSI 2	26590	1905	18.17	19.50	1.358	-	-	0.06	0.329	0.447
	LTE Band 25	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 3	DSI 2	26590	1905	18.17	19.50	1.358	-	-	0	0.408	0.554
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	26140	1860	18.16	19.50	1.361	-	-	0.1	0.745	1.014
	LTE Band 25	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	26340	1880	18.14	19.50	1.368	-	-	0.06	0.815	1.115
	LTE Band 25	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	26140	1860	18.16	19.50	1.361	-	-	0.01	0.706	0.961
	LTE Band 25	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	26340	1880	18.14	19.50	1.368	-	-	0.08	0.798	1.091
	LTE Band 25	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	DSI 2	26590	1905	18.15	19.50	1.365	-	-	-0.16	0.788	1.075
	LTE Band 25	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 3	DSI 2	26590	1905	18.15	19.50	1.365	-	-	-0.06	0.710	0.969
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	376500	1882.5	23.50	24.00	1.122	-	-	0.02	0.070	0.079
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	376500	1882.5	23.50	24.00	1.122	-	-	0.06	0.029	0.033
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	376500	1882.5	23.50	24.00	1.122	-	-	-0.07	0.041	0.046
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	376500	1882.5	23.50	24.00	1.122	-	-	0.08	0.016	0.018
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	376500	1882.5	23.44	24.00	1.138	-	-	0.13	0.064	0.073
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	376500	1882.5	23.44	24.00	1.138	-	-	0.07	0.025	0.028
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	376500	1882.5	23.44	24.00	1.138	-	-	0.06	0.037	0.042
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	376500	1882.5	23.44	24.00	1.138	-	-	0.09	0.013	0.015
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	376500	1882.5	23.40	24.00	1.148	-	-	0.14	0.105	0.121
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	376500	1882.5	23.40	24.00	1.148	-	-	0.15	0.062	0.071
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	376500	1882.5	23.40	24.00	1.148	-	-	-0.1	0.069	0.079
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	376500	1882.5	23.40	24.00	1.148	-	-	0.06	0.058	0.067
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	376500	1882.5	23.33	24.00	1.167	-	-	-0.05	0.103	0.120
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	376500	1882.5	23.33	24.00	1.167	-	-	0.09	0.052	0.061
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	376500	1882.5	23.33	24.00	1.167	-	-	0.13	0.068	0.079
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	376500	1882.5	23.33	24.00	1.167	-	-	-0.01	0.048	0.056
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 2	DSI 2	376500	1882.5	17.68	18.50	1.208	-	-	0.02	1.010	1.220
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 2	DSI 2	376500	1882.5	17.68	18.50	1.208	-	-	-0.18	0.299	0.361
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 2	DSI 2	376500	1882.5	17.68	18.50	1.208	-	-	0.17	0.481	0.581
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 2	DSI 2	376500	1882.5	17.68	18.50	1.208	-	-	0.13	0.167	0.202
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 2	DSI 2	376500	1882.5	17.60	18.50	1.230	-	-	-0.12	0.900	1.107
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 2	DSI 2	376500	1882.5	17.60	18.50	1.230	-	-	0.1	0.266	0.327
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 2	DSI 2	376500	1882.5	17.60	18.50	1.230	-	-	0.09	0.429	0.528
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 2	DSI 2	376500	1882.5	17.60	18.50	1.230	-	-	-0.18	0.149	0.183
	FR1 n25	40M	QPSK	216	0	DFT-15	Right Cheek	0mm	Ant 2	DSI 2	376500	1882.5	17.45	18.50	1.274	-	-	0	0.941	1.198
19	FR1 n25	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	376500	1882.5	18.49	19.50	1.262	-	-	0.07	0.973	1.228
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	376500	1882.5	18.49	19.50	1.262	-	-	0.12	0.883	1.114
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 3	DSI 2	376500	1882.5	18.49	19.50	1.262	-	-	0.15	0.504	0.636
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 3	DSI 2	376500	1882.5	18.49	19.50	1.262	-	-	-0.18	0.579	0.731
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	376500	1882.5	18.39	19.50	1.291	-	-	-0.08	0.867	1.119
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	376500	1882.5	18.39	19.50	1.291	-	-	0.08	0.787	1.016
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 3	DSI 2	376500	1882.5	18.39	19.50	1.291	-	-	-0.14	0.449	0.580
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 3	DSI 2	376500	1882.5	18.39	19.50	1.291	-	-	0	0.516	0.666
	FR1 n25	40M	QPSK	216	0	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	376500	1882.5	18.28	19.50	1.324	-	-	-0.06	0.851	1.127
	FR1 n25	40M	QPSK	216	0	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	376500	1882.5	18.28	19.50	1.324	-	-	-0.15	0.725	0.960
2300 MHz																				
	LTE Band 30	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	27710	2310	23.59	24.00	1.099	-	-	-0.12	0.125	0.137



FCC SAR Test Report

Report No. : FA420703

	LTE Band 30	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	27710	2310	23.59	24.00	1.099	-	-	0.03	0.070	0.077
	LTE Band 30	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	27710	2310	23.59	24.00	1.099	-	-	0.01	0.198	0.218
	LTE Band 30	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	27710	2310	23.59	24.00	1.099	-	-	0.12	0.042	0.046
	LTE Band 30	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	DSI 2	27710	2310	22.69	23.00	1.074	-	-	0.12	0.086	0.092
	LTE Band 30	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	DSI 2	27710	2310	22.69	23.00	1.074	-	-	0.17	0.052	0.056
	LTE Band 30	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	DSI 2	27710	2310	22.69	23.00	1.074	-	-	-0.01	0.139	0.149
	LTE Band 30	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	DSI 2	27710	2310	22.69	23.00	1.074	-	-	0.06	0.037	0.040
	LTE Band 30	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	27710	2310	23.16	24.00	1.213	-	-	-0.15	0.078	0.095
	LTE Band 30	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	27710	2310	23.16	24.00	1.213	-	-	0.04	0.040	0.049
	LTE Band 30	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	27710	2310	23.16	24.00	1.213	-	-	0.13	0.057	0.069
	LTE Band 30	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	27710	2310	23.16	24.00	1.213	-	-	0.07	0.036	0.044
	LTE Band 30	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 1	DSI 2	27710	2310	22.19	23.00	1.205	-	-	0.16	0.051	0.061
	LTE Band 30	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 1	DSI 2	27710	2310	22.19	23.00	1.205	-	-	0.01	0.032	0.039
	LTE Band 30	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	DSI 2	27710	2310	22.19	23.00	1.205	-	-	0.06	0.048	0.058
	LTE Band 30	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 1	DSI 2	27710	2310	22.19	23.00	1.205	-	-	0.05	0.029	0.035
20	LTE Band 30	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	27710	2310	19.25	20.30	1.274	-	-	0.11	0.847	1.079
	LTE Band 30	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 2	DSI 2	27710	2310	19.25	20.30	1.274	-	-	-0.16	0.191	0.243
	LTE Band 30	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	27710	2310	19.25	20.30	1.274	-	-	0.17	0.579	0.737
	LTE Band 30	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 2	DSI 2	27710	2310	19.25	20.30	1.274	-	-	-0.13	0.141	0.180
	LTE Band 30	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 2	DSI 2	27710	2310	19.20	20.30	1.288	-	-	0.01	0.755	0.973
	LTE Band 30	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 2	DSI 2	27710	2310	19.20	20.30	1.288	-	-	-0.16	0.170	0.219
	LTE Band 30	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 2	DSI 2	27710	2310	19.20	20.30	1.288	-	-	0.18	0.516	0.665
	LTE Band 30	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 2	DSI 2	27710	2310	19.20	20.30	1.288	-	-	-0.07	0.126	0.162
	LTE Band 30	10M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	27710	2310	19.18	20.30	1.294	-	-	-0.11	0.810	1.048
	LTE Band 30	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	27710	2310	16.40	18.00	1.445	-	-	-0.11	0.730	1.055
	LTE Band 30	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	27710	2310	16.40	18.00	1.445	-	-	-0.14	0.679	0.981
	LTE Band 30	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 3	DSI 2	27710	2310	16.40	18.00	1.445	-	-	0.07	0.433	0.626
	LTE Band 30	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 3	DSI 2	27710	2310	16.40	18.00	1.445	-	-	0.14	0.412	0.596
	LTE Band 30	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 3	DSI 2	27710	2310	16.39	18.00	1.449	-	-	-0.02	0.651	0.943
	LTE Band 30	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 3	DSI 2	27710	2310	16.39	18.00	1.449	-	-	-0.11	0.605	0.877
	LTE Band 30	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 3	DSI 2	27710	2310	16.39	18.00	1.449	-	-	-0.08	0.386	0.559
	LTE Band 30	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 3	DSI 2	27710	2310	16.39	18.00	1.449	-	-	-0.05	0.367	0.532
	LTE Band 30	10M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	27710	2310	16.37	18.00	1.455	-	-	-0.15	0.688	1.001
	LTE Band 30	10M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	27710	2310	16.37	18.00	1.455	-	-	0.16	0.623	0.907
	FR1 n30	10M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	462000	2310	23.50	24.00	1.122	-	-	-0.16	0.092	0.103
	FR1 n30	10M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	462000	2310	23.50	24.00	1.122	-	-	0.16	0.049	0.055
	FR1 n30	10M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	462000	2310	23.50	24.00	1.122	-	-	-0.02	0.151	0.169
	FR1 n30	10M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	462000	2310	23.50	24.00	1.122	-	-	0.06	0.026	0.029
	FR1 n30	10M	QPSK	25	14	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	462000	2310	23.43	24.00	1.140	-	-	0.02	0.090	0.103
	FR1 n30	10M	QPSK	25	14	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	462000	2310	23.43	24.00	1.140	-	-	0.17	0.048	0.055
	FR1 n30	10M	QPSK	25	14	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	462000	2310	23.43	24.00	1.140	-	-	-0.02	0.143	0.163
	FR1 n30	10M	QPSK	25	14	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	462000	2310	23.43	24.00	1.140	-	-	0.06	0.021	0.024
	FR1 n30	10M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	462000	2310	23.50	24.00	1.122	-	-	0.09	0.067	0.075
	FR1 n30	10M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	462000	2310	23.50	24.00	1.122	-	-	0.06	0.028	0.031
	FR1 n30	10M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	462000	2310	23.50	24.00	1.122	-	-	0.08	0.045	0.050
	FR1 n30	10M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	462000	2310	23.50	24.00	1.122	-	-	0.01	0.019	0.021
	FR1 n30	10M	QPSK	25	14	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	462000	2310	23.40	24.00	1.148	-	-	-0.17	0.063	0.072
	FR1 n30	10M	QPSK	25	14	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	462000	2310	23.40	24.00	1.148	-	-	0.06	0.030	0.034
	FR1 n30	10M	QPSK	25	14	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	462000	2310	23.40	24.00	1.148	-	-	0.08	0.041	0.047
	FR1 n30	10M	QPSK	25	14	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	462000	2310	23.40	24.00	1.148	-	-	0.09	0.018	0.021
	FR1 n30	10M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 2	DSI 2	462000	2310	19.09	20.00	1.233	-	-	-0.17	0.764	0.942
	FR1 n30	10M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 2	DSI 2	462000	2310	19.09	20.00	1.233	-	-	-0.11	0.189	0.233
	FR1 n30	10M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 2	DSI 2	462000	2310	19.09	20.00	1.233	-	-	-0.18	0.622	0.767
	FR1 n30	10M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 2	DSI 2	462000	2310	19.09	20.00	1.233	-	-	0.01	0.119	0.147
	FR1 n30	10M	QPSK	25	14	DFT-15	Right Cheek	0mm	Ant 2	DSI 2	462000	2310	19.02	20.00	1.253	-	-	0.09	0.857	1.074
	FR1 n30	10M	QPSK	25	14	DFT-15	Right Tilted	0mm	Ant 2	DSI 2	462000	2310	19.02	20.00	1.253	-	-	0.16	0.212	0.266



FCC SAR Test Report

Report No. : FA420703

	FR1 n30	10M	QPSK	25	14	DFT-15	Left Cheek	0mm	Ant 2	DSI 2	462000	2310	19.02	20.00	1.253	-	-	0.07	0.698	0.875
	FR1 n30	10M	QPSK	25	14	DFT-15	Left Tilted	0mm	Ant 2	DSI 2	462000	2310	19.02	20.00	1.253	-	-	-0.04	0.133	0.167
	FR1 n30	10M	QPSK	50	0	DFT-15	Right Cheek	0mm	Ant 2	DSI 2	462000	2310	18.97	20.00	1.268	-	-	0	0.812	1.029
	FR1 n30	10M	QPSK	50	0	DFT-15	Left Cheek	0mm	Ant 2	DSI 2	462000	2310	18.97	20.00	1.268	-	-	0.09	0.659	0.835
21	FR1 n30	10M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	462000	2310	17.52	18.50	1.253	-	-	-0.09	0.974	1.221
	FR1 n30	10M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	462000	2310	17.52	18.50	1.253	-	-	0.04	0.882	1.105
	FR1 n30	10M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 3	DSI 2	462000	2310	17.52	18.50	1.253	-	-	0.03	0.578	0.724
	FR1 n30	10M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 3	DSI 2	462000	2310	17.52	18.50	1.253	-	-	-0.03	0.556	0.697
	FR1 n30	10M	QPSK	25	14	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	462000	2310	17.43	18.50	1.279	-	-	-0.07	0.868	1.111
	FR1 n30	10M	QPSK	25	14	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	462000	2310	17.43	18.50	1.279	-	-	-0.13	0.786	1.006
	FR1 n30	10M	QPSK	25	14	DFT-15	Left Cheek	0mm	Ant 3	DSI 2	462000	2310	17.43	18.50	1.279	-	-	0.12	0.515	0.659
	FR1 n30	10M	QPSK	25	14	DFT-15	Left Tilted	0mm	Ant 3	DSI 2	462000	2310	17.43	18.50	1.279	-	-	-0.1	0.498	0.637
	FR1 n30	10M	QPSK	50	0	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	462000	2310	17.33	18.50	1.309	-	-	-0.09	0.911	1.193
	FR1 n30	10M	QPSK	50	0	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	462000	2310	17.33	18.50	1.309	-	-	-0.14	0.834	1.092
2600 MHz																				
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	21100	2535	23.38	24.00	1.153	-	-	0.11	0.293	0.338
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	21100	2535	23.38	24.00	1.153	-	-	-0.17	0.217	0.250
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	21100	2535	23.38	24.00	1.153	-	-	0.13	0.526	0.607
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	21100	2535	23.38	24.00	1.153	-	-	0.15	0.141	0.163
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	20850	2510	23.33	24.00	1.167	-	-	-0.16	0.484	0.565
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	21350	2560	23.35	24.00	1.161	-	-	-0.06	0.585	0.679
	LTE Band 7C	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	21350+21152	2560+2540.2	23.32	24.00	1.169	-	-	-0.12	0.495	0.579
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	21100	2535	22.42	23.00	1.143	-	-	-0.05	0.168	0.192
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI 2	21100	2535	22.42	23.00	1.143	-	-	0.05	0.129	0.147
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	21100	2535	22.42	23.00	1.143	-	-	0.06	0.303	0.346
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI 2	21100	2535	22.42	23.00	1.143	-	-	0.14	0.082	0.094
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	20850	2510	22.38	23.00	1.153	-	-	-0.01	0.282	0.325
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	21350	2560	22.34	23.00	1.164	-	-	-0.17	0.342	0.398
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	21100	2535	23.27	24.00	1.183	-	-	0.18	0.211	0.250
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	21100	2535	23.27	24.00	1.183	-	-	-0.18	0.076	0.090
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	21100	2535	23.27	24.00	1.183	-	-	0.01	0.126	0.149
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	21100	2535	23.27	24.00	1.183	-	-	-0.1	0.101	0.119
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	20850	2510	23.15	24.00	1.216	-	-	0.07	0.193	0.235
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	21350	2560	23.23	24.00	1.194	-	-	0.17	0.246	0.294
	LTE Band 7C	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	21350+21152	2560+2540.2	23.17	24.00	1.211	-	-	-0.17	0.215	0.260
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	21100	2535	22.31	23.00	1.172	-	-	0.03	0.123	0.144
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 2	21100	2535	22.31	23.00	1.172	-	-	0.15	0.044	0.052
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	21100	2535	22.31	23.00	1.172	-	-	-0.12	0.071	0.083
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	21100	2535	22.31	23.00	1.172	-	-	0.01	0.057	0.067
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	20850	2510	22.20	23.00	1.202	-	-	-0.17	0.111	0.133
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	21350	2560	22.28	23.00	1.180	-	-	-0.08	0.142	0.168
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	21100	2535	15.85	16.40	1.135	-	-	0.02	0.427	0.485
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 2	DSI 2	21100	2535	15.85	16.40	1.135	-	-	0.16	0.103	0.117
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	21100	2535	15.85	16.40	1.135	-	-	-0.13	0.812	0.922
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 2	DSI 2	21100	2535	15.85	16.40	1.135	-	-	-0.07	0.073	0.083
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	20850	2510	15.75	16.40	1.161	-	-	0.07	0.786	0.913
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	21350	2560	15.77	16.40	1.156	-	-	0.18	0.871	1.007
	LTE Band 7C	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	21350+21152	2560+2540.2	15.59	16.40	1.205	-	-	0.11	0.833	1.004
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	21100	2535	15.81	16.40	1.146	-	-	0.14	0.407	0.466
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 2	DSI 2	21100	2535	15.81	16.40	1.146	-	-	-0.11	0.091	0.104
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 2	21100	2535	15.81	16.40	1.146	-	-	0.17	0.786	0.900
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 2	DSI 2	21100	2535	15.81	16.40	1.146	-	-	-0.01	0.087	0.100
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 2	20850	2510	15.68	16.40	1.180	-	-	0.04	0.758	0.895
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 2	21350	2560	15.76	16.40	1.159	-	-	0.05	0.841	0.975
	LTE Band 7	20M	QPSK	100	0	-	Left Cheek	0mm	Ant 2	DSI 2	21100	2535	15.82	16.40	1.143	-	-	0.05	0.768	0.878



FCC SAR Test Report

Report No. : FA420703

	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	21100	2535	16.50	17.10	1.148	-	-	0.12	0.823	0.945
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	21100	2535	16.50	17.10	1.148	-	-	-0.07	0.802	0.921
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 3	DSI 2	21100	2535	16.50	17.10	1.148	-	-	0.05	0.494	0.567
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 3	DSI 2	21100	2535	16.50	17.10	1.148	-	-	0.18	0.563	0.646
22	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	20850	2510	16.18	17.10	1.236	-	-	0.09	0.859	1.062
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	21350	2560	16.38	17.10	1.180	-	-	0.18	0.850	1.003
	LTE Band 7C	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	20850+21048	2510+2529.8	16.38	17.10	1.180	-	-	0.05	0.763	0.901
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	20850	2510	16.18	17.10	1.236	-	-	0.06	0.826	1.021
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	21350	2560	16.38	17.10	1.180	-	-	0.01	0.781	0.922
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	21100	2535	16.40	17.10	1.175	-	-	-0.04	0.733	0.861
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	21100	2535	16.40	17.10	1.175	-	-	0.1	0.708	0.832
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	DSI 2	21100	2535	16.40	17.10	1.175	-	-	0.11	0.440	0.517
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 3	DSI 2	21100	2535	16.40	17.10	1.175	-	-	-0.09	0.502	0.590
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	20850	2510	16.39	17.10	1.178	-	-	-0.06	0.766	0.902
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	21350	2560	16.32	17.10	1.197	-	-	-0.14	0.758	0.907
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	20850	2510	16.39	17.10	1.178	-	-	0.06	0.706	0.831
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	21350	2560	16.32	17.10	1.197	-	-	0.01	0.719	0.860
	LTE Band 7	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	DSI 2	21100	2535	16.37	17.10	1.183	-	-	0.13	0.756	0.894
	LTE Band 7	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 3	DSI 2	21100	2535	16.37	17.10	1.183	-	-	-0.14	0.716	0.847
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	40185	2549.5	23.49	24.00	1.125	62.9	1.006	-0.16	0.117	0.132
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	40185	2549.5	23.49	24.00	1.125	62.9	1.006	0.04	0.070	0.079
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	40185	2549.5	23.49	24.00	1.125	62.9	1.006	0.09	0.278	0.315
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	40185	2549.5	23.49	24.00	1.125	62.9	1.006	0.03	0.046	0.052
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	39750	2506	23.38	24.00	1.153	62.9	1.006	-0.11	0.240	0.278
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	40620	2593	23.46	24.00	1.132	62.9	1.006	0.07	0.308	0.351
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	41055	2636.5	23.39	24.00	1.151	62.9	1.006	0.13	0.385	0.446
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	41490	2680	23.32	24.00	1.169	62.9	1.006	0.04	0.484	0.569
	LTE Band 41 HPUE	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	41490	2680	26.47	27.00	1.130	42.9	1.009	0.04	0.619	0.706
	LTE Band 41C HPUE	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	41490+41292	2680+2660.2	26.18	27.00	1.208	42.9	1.009	0	0.482	0.587
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	40185	2549.5	23.47	24.00	1.130	62.9	1.006	-0.07	0.092	0.105
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI 2	40185	2549.5	23.47	24.00	1.130	62.9	1.006	-0.1	0.060	0.068
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	40185	2549.5	23.47	24.00	1.130	62.9	1.006	0.01	0.217	0.247
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI 2	40185	2549.5	23.47	24.00	1.130	62.9	1.006	0.06	0.041	0.047
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	39750	2506	23.36	24.00	1.159	62.9	1.006	-0.01	0.188	0.219
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	40620	2593	23.40	24.00	1.148	62.9	1.006	-0.08	0.254	0.293
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	41055	2636.5	23.35	24.00	1.161	62.9	1.006	0.07	0.314	0.367
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	41490	2680	23.31	24.00	1.172	62.9	1.006	-0.14	0.360	0.425
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	40185	2549.5	23.42	24.00	1.143	62.9	1.006	-0.04	0.128	0.147
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	40185	2549.5	23.42	24.00	1.143	62.9	1.006	0.01	0.048	0.055
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	40185	2549.5	23.42	24.00	1.143	62.9	1.006	0.03	0.060	0.069
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	40185	2549.5	23.42	24.00	1.143	62.9	1.006	-0.05	0.066	0.076
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	39750	2506	23.22	24.00	1.197	62.9	1.006	0.01	0.105	0.126
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	40620	2593	23.33	24.00	1.167	62.9	1.006	0.06	0.138	0.162
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	41055	2636.5	23.38	24.00	1.153	62.9	1.006	0.07	0.152	0.176
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	41490	2680	23.39	24.00	1.151	62.9	1.006	0.03	0.133	0.154
	LTE Band 41 HPUE	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	41055	2636.5	26.26	27.00	1.186	42.9	1.009	0.15	0.182	0.218
	LTE Band 41C	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	41055+41253	2636.5+2656.3	23.10	24.00	1.230	62.9	1.006	-0.02	0.153	0.189
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	40185	2549.5	23.41	24.00	1.146	62.9	1.006	-0.04	0.102	0.118
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 2	40185	2549.5	23.41	24.00	1.146	62.9	1.006	0.09	0.038	0.044
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	40185	2549.5	23.41	24.00	1.146	62.9	1.006	0.04	0.046	0.053
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	40185	2549.5	23.41	24.00	1.146	62.9	1.006	0.08	0.052	0.060
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	39750	2506	23.20	24.00	1.202	62.9	1.006	0.06	0.087	0.105
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	40620	2593	23.29	24.00	1.178	62.9	1.006	0.18	0.111	0.131
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	41055	2636.5	23.33	24.00	1.167	62.9	1.006	0.18	0.114	0.134
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	41490	2680	23.30	24.00	1.175	62.9	1.006	-0.07	0.074	0.087



FCC SAR Test Report

Report No. : FA420703

	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	40185	2549.5	18.20	18.80	1.148	62.9	1.006	0.07	0.600	0.693
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 2	DSI 2	40185	2549.5	18.20	18.80	1.148	62.9	1.006	-0.04	0.125	0.144
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	40185	2549.5	18.20	18.80	1.148	62.9	1.006	-0.1	0.928	1.072
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 2	DSI 2	40185	2549.5	18.20	18.80	1.148	62.9	1.006	-0.15	0.074	0.085
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	39750	2506	18.10	18.80	1.175	62.9	1.006	0.05	0.528	0.624
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	40620	2593	18.15	18.80	1.161	62.9	1.006	0.09	0.646	0.755
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	41055	2636.5	18.17	18.80	1.156	62.9	1.006	-0.05	0.652	0.758
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	41490	2680	18.08	18.80	1.180	62.9	1.006	0.11	0.675	0.801
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	39750	2506	18.10	18.80	1.175	62.9	1.006	0.15	0.763	0.902
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	40620	2593	18.15	18.80	1.161	62.9	1.006	0.06	0.934	1.091
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	41055	2636.5	18.17	18.80	1.156	62.9	1.006	0.07	0.942	1.096
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	41490	2680	18.08	18.80	1.180	62.9	1.006	-0.03	0.975	1.158
	LTE Band 41 HPUE	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	41490	2680	19.76	20.40	1.159	42.9	1.009	0.13	1.010	1.181
	LTE Band 41C HPUE	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	41490+41292	2680+2660.2	19.72	20.40	1.169	42.9	1.009	-0.06	0.936	1.105
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	40185	2549.5	18.15	18.80	1.161	62.9	1.006	-0.03	0.570	0.666
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 2	DSI 2	40185	2549.5	18.15	18.80	1.161	62.9	1.006	0.05	0.115	0.134
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 2	40185	2549.5	18.15	18.80	1.161	62.9	1.006	0.16	0.918	1.073
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 2	DSI 2	40185	2549.5	18.15	18.80	1.161	62.9	1.006	-0.07	0.054	0.063
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	39750	2506	18.08	18.80	1.180	62.9	1.006	0.05	0.510	0.606
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	40620	2593	18.03	18.80	1.194	62.9	1.006	-0.09	0.624	0.750
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	41055	2636.5	18.12	18.80	1.169	62.9	1.006	0.01	0.630	0.741
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	41490	2680	18.00	18.80	1.202	62.9	1.006	0.16	0.652	0.789
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 2	39750	2506	18.08	18.80	1.180	62.9	1.006	-0.14	0.753	0.894
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 2	40620	2593	18.03	18.80	1.194	62.9	1.006	-0.14	0.910	1.093
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 2	41055	2636.5	18.12	18.80	1.169	62.9	1.006	0	0.902	1.061
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 2	41490	2680	18.00	18.80	1.202	62.9	1.006	-0.15	0.955	1.155
	LTE Band 41	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 2	DSI 2	40185	2549.5	18.12	18.80	1.169	62.9	1.006	0.06	0.587	0.691
	LTE Band 41	20M	QPSK	100	0	-	Left Cheek	0mm	Ant 2	DSI 2	40185	2549.5	18.12	18.80	1.169	62.9	1.006	0.09	0.901	1.060
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	40185	2549.5	16.31	16.80	1.119	62.9	1.006	0.04	0.617	0.695
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	40185	2549.5	16.31	16.80	1.119	62.9	1.006	0.05	0.506	0.570
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 3	DSI 2	40185	2549.5	16.31	16.80	1.119	62.9	1.006	-0.03	0.240	0.270
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 3	DSI 2	40185	2549.5	16.31	16.80	1.119	62.9	1.006	0.1	0.316	0.356
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	39750	2506	16.25	16.80	1.135	62.9	1.006	-0.04	0.616	0.703
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	40620	2593	16.20	16.80	1.148	62.9	1.006	0.06	0.497	0.574
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	41055	2636.5	16.23	16.80	1.140	62.9	1.006	0.06	0.879	1.008
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	41490	2680	16.18	16.80	1.153	62.9	1.006	-0.01	0.994	1.153
23	LTE Band 41 HPUE	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	41490	2680	17.50	18.40	1.230	42.9	1.009	0.13	1.010	1.254
	LTE Band 41C HPUE	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	41490+41292	2680+2660.2	17.31	18.40	1.285	42.9	1.009	-0.18	0.817	1.060
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	40185	2549.5	16.30	16.80	1.122	62.9	1.006	0.13	0.596	0.673
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	40185	2549.5	16.30	16.80	1.122	62.9	1.006	-0.06	0.489	0.552
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	DSI 2	40185	2549.5	16.30	16.80	1.122	62.9	1.006	0.09	0.232	0.262
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 3	DSI 2	40185	2549.5	16.30	16.80	1.122	62.9	1.006	0.13	0.305	0.344
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	39750	2506	16.23	16.80	1.140	62.9	1.006	-0.03	0.595	0.683
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	40620	2593	16.18	16.80	1.153	62.9	1.006	0.17	0.480	0.557
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	41055	2636.5	16.20	16.80	1.148	62.9	1.006	0	0.849	0.981
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	41490	2680	16.17	16.80	1.156	62.9	1.006	0.01	0.960	1.117
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	40185	2549.5	16.23	16.80	1.140	62.9	1.006	0.12	0.577	0.662
	FR1 n7	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	507000	2535	23.45	24.00	1.135	-	-	0.01	0.166	0.188
	FR1 n7	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	507000	2535	23.45	24.00	1.135	-	-	0.09	0.124	0.141
	FR1 n7	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	507000	2535	23.45	24.00	1.135	-	-	0.17	0.313	0.355
	FR1 n7	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	507000	2535	23.45	24.00	1.135	-	-	-0.11	0.082	0.093
	FR1 n7	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 0	DSI 2	507000	2535	23.41	24.00	1.146	-	-	-0.13	0.165	0.189
	FR1 n7	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 0	DSI 2	507000	2535	23.41	24.00	1.146	-	-	-0.07	0.114	0.131
	FR1 n7	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 0	DSI 2	507000	2535	23.41	24.00	1.146	-	-	0.07	0.298	0.341
	FR1 n7	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 0	DSI 2	507000	2535	23.41	24.00	1.146	-	-	0.08	0.078	0.089



FCC SAR Test Report

Report No. : FA420703

	FR1 n7	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	507000	2535	23.24	24.00	1.191	-	-	0.03	0.140	0.167
	FR1 n7	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	507000	2535	23.24	24.00	1.191	-	-	-0.17	0.047	0.056
	FR1 n7	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	507000	2535	23.24	24.00	1.191	-	-	0.16	0.078	0.093
	FR1 n7	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	507000	2535	23.24	24.00	1.191	-	-	-0.06	0.067	0.080
	FR1 n7	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 1	DSI 2	507000	2535	23.20	24.00	1.202	-	-	-0.16	0.131	0.157
	FR1 n7	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 1	DSI 2	507000	2535	23.20	24.00	1.202	-	-	0.06	0.046	0.055
	FR1 n7	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 1	DSI 2	507000	2535	23.20	24.00	1.202	-	-	-0.16	0.071	0.085
	FR1 n7	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 1	DSI 2	507000	2535	23.20	24.00	1.202	-	-	-0.17	0.065	0.078
	FR1 n7	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 2	DSI 2	507000	2535	16.40	17.00	1.148	-	-	-0.1	0.418	0.480
	FR1 n7	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 2	DSI 2	507000	2535	16.40	17.00	1.148	-	-	-0.03	0.094	0.108
	FR1 n7	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 2	DSI 2	507000	2535	16.40	17.00	1.148	-	-	-0.05	0.887	1.018
	FR1 n7	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 2	DSI 2	507000	2535	16.40	17.00	1.148	-	-	0.05	0.070	0.080
	FR1 n7	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 2	DSI 2	507000	2535	16.35	17.00	1.161	-	-	-0.01	0.430	0.499
	FR1 n7	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 2	DSI 2	507000	2535	16.35	17.00	1.161	-	-	0.06	0.102	0.118
	FR1 n7	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 2	DSI 2	507000	2535	16.35	17.00	1.161	-	-	0.01	0.921	1.070
	FR1 n7	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 2	DSI 2	507000	2535	16.35	17.00	1.161	-	-	-0.17	0.071	0.082
	FR1 n7	40M	QPSK	216	0	DFT-15	Left Cheek	0mm	Ant 2	DSI 2	507000	2535	16.27	17.00	1.183	-	-	-0.01	0.901	1.066
24	FR1 n7	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	507000	2535	17.48	18.50	1.265	-	-	0.18	1.000	1.265
	FR1 n7	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	507000	2535	17.48	18.50	1.265	-	-	0.18	0.958	1.212
	FR1 n7	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 3	DSI 2	507000	2535	17.48	18.50	1.265	-	-	-0.1	0.572	0.723
	FR1 n7	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 3	DSI 2	507000	2535	17.48	18.50	1.265	-	-	0.15	0.697	0.882
	FR1 n7	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	507000	2535	17.38	18.50	1.294	-	-	-0.12	0.962	1.245
	FR1 n7	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	507000	2535	17.38	18.50	1.294	-	-	0.04	0.935	1.210
	FR1 n7	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 3	DSI 2	507000	2535	17.38	18.50	1.294	-	-	0.15	0.546	0.707
	FR1 n7	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 3	DSI 2	507000	2535	17.38	18.50	1.294	-	-	0.06	0.652	0.844
	FR1 n7	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 3	DSI 2	507000	2535	17.29	18.50	1.321	-	-	-0.16	0.938	1.239
	FR1 n7	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 3	DSI 2	507000	2535	17.29	18.50	1.321	-	-	0.1	0.909	1.201
	FR1 n7	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 3	DSI 2	507000	2535	17.29	18.50	1.321	-	-	0.09	0.676	0.893
	FR1 n41	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 0	DSI 2	518598	2592.99	23.45	24.00	1.135	-	-	0.18	0.160	0.182
	FR1 n41	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 0	DSI 2	518598	2592.99	23.45	24.00	1.135	-	-	0.14	0.109	0.124
	FR1 n41	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 0	DSI 2	518598	2592.99	23.45	24.00	1.135	-	-	-0.05	0.316	0.359
	FR1 n41	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 0	DSI 2	518598	2592.99	23.45	24.00	1.135	-	-	0.05	0.069	0.078
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 0	DSI 2	518598	2592.99	23.39	24.00	1.151	-	-	-0.07	0.172	0.198
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 0	DSI 2	518598	2592.99	23.39	24.00	1.151	-	-	0.13	0.126	0.145
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 0	DSI 2	518598	2592.99	23.39	24.00	1.151	-	-	-0.05	0.366	0.421
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 0	DSI 2	518598	2592.99	23.39	24.00	1.151	-	-	0.09	0.077	0.089
	FR1 n41_HPUE	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 0	DSI 2	518598	2592.99	25.98	27.00	1.265	50	1.000	0.13	0.360	0.455
	FR1 n41	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 1	DSI 2	518598	2592.99	23.50	24.00	1.122	-	-	-0.11	0.144	0.162
	FR1 n41	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 1	DSI 2	518598	2592.99	23.50	24.00	1.122	-	-	-0.01	0.048	0.054
	FR1 n41	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 1	DSI 2	518598	2592.99	23.50	24.00	1.122	-	-	0.09	0.074	0.083
	FR1 n41	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 1	DSI 2	518598	2592.99	23.50	24.00	1.122	-	-	0.16	0.066	0.074
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 1	DSI 2	518598	2592.99	23.38	24.00	1.153	-	-	-0.1	0.173	0.200
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 1	DSI 2	518598	2592.99	23.38	24.00	1.153	-	-	0.18	0.053	0.061
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 1	DSI 2	518598	2592.99	23.38	24.00	1.153	-	-	-0.03	0.085	0.098
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 1	DSI 2	518598	2592.99	23.38	24.00	1.153	-	-	-0.02	0.066	0.076
	FR1 n41_HPUE	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 1	DSI 2	518598	2592.99	25.91	27.00	1.285	50	1.000	-0.01	0.168	0.216
	FR1 n41	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 2	DSI 2	518598	2592.99	17.96	18.50	1.132	-	-	-0.17	0.422	0.478
	FR1 n41	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 2	DSI 2	518598	2592.99	17.96	18.50	1.132	-	-	-0.08	0.093	0.105
	FR1 n41	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 2	DSI 2	518598	2592.99	17.96	18.50	1.132	-	-	0.12	1.110	1.257
	FR1 n41	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 2	DSI 2	518598	2592.99	17.96	18.50	1.132	-	-	0.05	0.065	0.074
25	FR1 n41_HPUE	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 2	DSI 2	518598	2592.99	20.68	21.50	1.208	50	1.000	0.14	1.050	1.268
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 2	DSI 2	518598	2592.99	17.89	18.50	1.151	-	-	0.02	0.376	0.433
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 2	DSI 2	518598	2592.99	17.89	18.50	1.151	-	-	-0.05	0.083	0.096
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 2	DSI 2	518598	2592.99	17.89	18.50	1.151	-	-	0.02	0.989	1.138
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 2	DSI 2	518598	2592.99	17.89	18.50	1.151	-	-	-0.14	0.058	0.067
	FR1 n41	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 2	DSI 2	518598	2592.99	17.78	18.50	1.180	-	-	0.02	0.991	1.170



FCC SAR Test Report

Report No. : FA420703

	FR1 n41	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	518598	2592.99	16.36	17.50	1.300	-	-	0.06	0.945	1.229
	FR1 n41	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	518598	2592.99	16.36	17.50	1.300	-	-	0.13	0.912	1.186
	FR1 n41	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 3	DSI 2	518598	2592.99	16.36	17.50	1.300	-	-	0.02	0.555	0.722
	FR1 n41	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 3	DSI 2	518598	2592.99	16.36	17.50	1.300	-	-	0.18	0.712	0.926
	FR1 n41_HPUE	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	518598	2592.99	19.54	20.50	1.247	50	1.000	-0.04	0.984	1.227
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	518598	2592.99	16.22	17.50	1.343	-	-	0.02	0.906	1.217
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	5mm	Ant 3	DSI 2	518598	2592.99	16.22	17.50	1.343	-	-	-0.16	0.871	1.170
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	5mm	Ant 3	DSI 2	518598	2592.99	16.22	17.50	1.343	-	-	-0.14	0.526	0.706
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	5mm	Ant 3	DSI 2	518598	2592.99	16.22	17.50	1.343	-	-	-0.11	0.709	0.952
	FR1 n41	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	518598	2592.99	16.13	17.50	1.371	-	-	0.11	0.867	1.189
	FR1 n41	100M	QPSK	270	0	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	518598	2592.99	16.13	17.50	1.371	-	-	0.07	0.842	1.154
	FR1 n41	100M	QPSK	270	0	DFT-30	Left Tilted	0mm	Ant 3	DSI 2	518598	2592.99	16.13	17.50	1.371	-	-	0.02	0.686	0.940
3-5GHz																				
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	55340	3560	16.50	17.10	1.148	62.9	1.006	0.09	0.618	0.714
	LTE Band 48	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	55340	3560	16.50	17.10	1.148	62.9	1.006	0.02	0.729	0.842
	LTE Band 48	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 3	DSI 2	55340	3560	16.50	17.10	1.148	62.9	1.006	0.06	0.321	0.371
	LTE Band 48	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 3	DSI 2	55340	3560	16.50	17.10	1.148	62.9	1.006	-0.17	0.418	0.483
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	55830	3609	16.40	17.10	1.175	62.9	1.006	0.01	0.680	0.804
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	56150	3641	16.38	17.10	1.180	62.9	1.006	0.06	0.677	0.804
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	DSI 2	56640	3690	16.30	17.10	1.202	62.9	1.006	0.05	0.761	0.920
	LTE Band 48	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	55830	3609	16.40	17.10	1.175	62.9	1.006	-0.01	0.781	0.923
	LTE Band 48	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	56150	3641	16.38	17.10	1.180	62.9	1.006	0.06	0.777	0.923
	LTE Band 48	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	56640	3690	16.30	17.10	1.202	62.9	1.006	0.1	0.874	1.057
	LTE Band 48C	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	DSI 2	56640+ 56442	3690+ 3670.2	16.31	17.10	1.199	62.9	1.006	-0.04	0.712	0.859
	LTE Band 48	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	55340	3560	16.46	17.10	1.159	62.9	1.006	-0.03	0.597	0.696
	LTE Band 48	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	55340	3560	16.46	17.10	1.159	62.9	1.006	-0.04	0.704	0.821
	LTE Band 48	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	DSI 2	55340	3560	16.46	17.10	1.159	62.9	1.006	-0.06	0.310	0.361
	LTE Band 48	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 3	DSI 2	55340	3560	16.46	17.10	1.159	62.9	1.006	-0.1	0.404	0.471
	LTE Band 48	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	55830	3609	16.35	17.10	1.189	62.9	1.006	0.01	0.657	0.786
	LTE Band 48	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	56150	3641	16.37	17.10	1.183	62.9	1.006	0.06	0.654	0.778
	LTE Band 48	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	DSI 2	56640	3690	16.28	17.10	1.208	62.9	1.006	-0.08	0.735	0.893
	LTE Band 48	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	55830	3609	16.35	17.10	1.189	62.9	1.006	-0.18	0.754	0.902
	LTE Band 48	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	56150	3641	16.37	17.10	1.183	62.9	1.006	0.1	0.751	0.894
	LTE Band 48	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	DSI 2	56640	3690	16.28	17.10	1.208	62.9	1.006	-0.07	0.844	1.026
	LTE Band 48	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	DSI 2	55340	3560	16.42	17.10	1.169	62.9	1.006	0.06	0.586	0.689
	LTE Band 48	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 3	DSI 2	55340	3560	16.42	17.10	1.169	62.9	1.006	-0.08	0.710	0.835
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	55830	3609	17.06	17.80	1.186	62.9	1.006	0.13	0.763	0.910
	LTE Band 48	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 2	55830	3609	17.06	17.80	1.186	62.9	1.006	0.15	0.185	0.221
	LTE Band 48	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 2	55830	3609	17.06	17.80	1.186	62.9	1.006	0.01	0.219	0.261
	LTE Band 48	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 2	55830	3609	17.06	17.80	1.186	62.9	1.006	-0.08	0.092	0.110
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	55340	3560	17.01	17.80	1.199	62.9	1.006	0.08	0.847	1.022
	LTE Band 48C	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	55340+ 55538	3560+ 3579.8	16.84	17.80	1.247	62.9	1.006	0.02	0.697	0.875
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	56150	3641	16.93	17.80	1.222	62.9	1.006	-0.07	0.767	0.943
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 2	56640	3690	16.95	17.80	1.216	62.9	1.006	0.18	0.769	0.941
	LTE Band 48	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	55830	3609	17.03	17.80	1.194	62.9	1.006	0.13	0.680	0.817
	LTE Band 48	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 2	55830	3609	17.03	17.80	1.194	62.9	1.006	0.07	0.165	0.198
	LTE Band 48	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI 2	55830	3609	17.03	17.80	1.194	62.9	1.006	-0.11	0.195	0.234
	LTE Band 48	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI 2	55830	3609	17.03	17.80	1.194	62.9	1.006	0	0.082	0.098
	LTE Band 48	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	55340	3560	16.98	17.80	1.208	62.9	1.006	-0.05	0.755	0.917
	LTE Band 48	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	56150	3641	16.92	17.80	1.225	62.9	1.006	0.17	0.684	0.843
	LTE Band 48	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 2	56640	3690	16.86	17.80	1.242	62.9	1.006	-0.06	0.685	0.856
	LTE Band 48	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 4	DSI 2	55830	3609	17.02	17.80	1.197	62.9	1.006	0.14	0.701	0.844
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 6	DSI 2	55830	3609	15.65	17.20	1.429	62.9	1.006	0.16	0.330	0.474
	LTE Band 48	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 6	DSI 2	55830	3609	15.65	17.20	1.429	62.9	1.006	0.04	0.389	0.559
	LTE Band 48	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 6	DSI 2	55830	3609	15.65	17.20	1.429	62.9	1.006	-0.12	0.613	0.881



FCC SAR Test Report

Report No. : FA420703

	LTE Band 48	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 6	DSI 2	55830	3609	15.65	17.20	1.429	62.9	1.006	-0.14	0.741	1.065
	LTE Band 48	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 6	DSI 2	55340	3560	15.59	17.20	1.449	62.9	1.006	0.08	0.738	1.076
	LTE Band 48	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 6	DSI 2	56150	3641	15.55	17.20	1.462	62.9	1.006	0.01	0.685	1.008
	LTE Band 48	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 6	DSI 2	56640	3690	15.58	17.20	1.452	62.9	1.006	0.09	0.659	0.963
26	LTE Band 48	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 6	DSI 2	55340	3560	15.59	17.20	1.449	62.9	1.006	0.13	0.867	1.264
	LTE Band 48C	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 6	DSI 2	55340+ 55538	3560+ 3579.8	15.42	17.20	1.507	62.9	1.006	0.06	0.726	1.100
	LTE Band 48	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 6	DSI 2	56150	3641	15.55	17.20	1.462	62.9	1.006	-0.1	0.805	1.184
	LTE Band 48	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 6	DSI 2	56640	3690	15.58	17.20	1.452	62.9	1.006	-0.08	0.774	1.131
	LTE Band 48	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 6	DSI 2	55830	3609	15.62	17.20	1.439	62.9	1.006	-0.09	0.318	0.460
	LTE Band 48	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 6	DSI 2	55830	3609	15.62	17.20	1.439	62.9	1.006	0.02	0.375	0.543
	LTE Band 48	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 6	DSI 2	55830	3609	15.62	17.20	1.439	62.9	1.006	0.03	0.591	0.855
	LTE Band 48	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 6	DSI 2	55830	3609	15.62	17.20	1.439	62.9	1.006	-0.07	0.714	1.033
	LTE Band 48	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 6	DSI 2	55340	3560	15.58	17.20	1.452	62.9	1.006	-0.07	0.711	1.039
	LTE Band 48	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 6	DSI 2	56150	3641	15.49	17.20	1.483	62.9	1.006	0.05	0.660	0.984
	LTE Band 48	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 6	DSI 2	56640	3690	15.56	17.20	1.459	62.9	1.006	0.08	0.635	0.932
	LTE Band 48	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 6	DSI 2	55340	3560	15.58	17.20	1.452	62.9	1.006	-0.03	0.836	1.221
	LTE Band 48	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 6	DSI 2	56150	3641	15.49	17.20	1.483	62.9	1.006	0.03	0.776	1.157
	LTE Band 48	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 6	DSI 2	56640	3690	15.56	17.20	1.459	62.9	1.006	0.03	0.746	1.095
	LTE Band 48	20M	QPSK	100	0	-	Left Cheek	0mm	Ant 6	DSI 2	55830	3609	15.55	17.20	1.462	62.9	1.006	-0.08	0.578	0.850
	LTE Band 48	20M	QPSK	100	0	-	Left Tilted	0mm	Ant 6	DSI 2	55830	3609	15.55	17.20	1.462	62.9	1.006	-0.15	0.709	1.043
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 8	DSI 2	55830	3609	19.61	20.30	1.172	62.9	1.006	0.1	0.700	0.825
	LTE Band 48	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 8	DSI 2	55830	3609	19.61	20.30	1.172	62.9	1.006	-0.05	0.131	0.154
	LTE Band 48	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 8	DSI 2	55830	3609	19.61	20.30	1.172	62.9	1.006	-0.07	0.746	0.880
	LTE Band 48	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 8	DSI 2	55830	3609	19.61	20.30	1.172	62.9	1.006	-0.1	0.218	0.257
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 8	DSI 2	55340	3560	19.54	20.30	1.191	62.9	1.006	0.07	0.648	0.777
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 8	DSI 2	56150	3641	19.52	20.30	1.197	62.9	1.006	0.06	0.749	0.902
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 8	DSI 2	56640	3690	19.55	20.30	1.189	62.9	1.006	0.09	0.759	0.907
	LTE Band 48	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 8	DSI 2	55340	3560	19.54	20.30	1.191	62.9	1.006	-0.11	0.744	0.892
	LTE Band 48	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 8	DSI 2	56150	3641	19.52	20.30	1.197	62.9	1.006	-0.07	0.860	1.035
	LTE Band 48	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 8	DSI 2	56640	3690	19.55	20.30	1.189	62.9	1.006	-0.12	0.871	1.041
	LTE Band 48C	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 8	DSI 2	56640 +56442	3690+ 3670.2	19.46	20.30	1.213	62.9	1.006	0.09	0.698	0.852
	LTE Band 48	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 8	DSI 2	55830	3609	19.59	20.30	1.178	62.9	1.006	0.03	0.667	0.790
	LTE Band 48	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 8	DSI 2	55830	3609	19.59	20.30	1.178	62.9	1.006	0.11	0.123	0.146
	LTE Band 48	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 8	DSI 2	55830	3609	19.59	20.30	1.178	62.9	1.006	0.13	0.709	0.840
	LTE Band 48	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 8	DSI 2	55830	3609	19.59	20.30	1.178	62.9	1.006	-0.04	0.206	0.244
	LTE Band 48	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 8	DSI 2	55340	3560	19.50	20.30	1.202	62.9	1.006	-0.01	0.721	0.872
	LTE Band 48	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 8	DSI 2	56150	3641	19.50	20.30	1.202	62.9	1.006	-0.14	0.818	0.989
	LTE Band 48	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 8	DSI 2	56640	3690	19.51	20.30	1.199	62.9	1.006	-0.1	0.826	0.997
	LTE Band 48	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 8	DSI 2	55830	3609	19.56	20.30	1.186	62.9	1.006	0.06	0.651	0.777
	LTE Band 48	20M	QPSK	100	0	-	Left Cheek	0mm	Ant 8	DSI 2	55830	3609	19.56	20.30	1.186	62.9	1.006	0.15	0.699	0.834
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	641666	3624.99	15.32	16.00	1.169	-	-	-0.04	0.697	0.815
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	641666	3624.99	15.32	16.00	1.169	-	-	0.16	0.953	1.115
	FR1 n48	40M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 3	DSI 2	641666	3624.99	15.32	16.00	1.169	-	-	0.14	0.363	0.425
	FR1 n48	40M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 3	DSI 2	641666	3624.99	15.32	16.00	1.169	-	-	0.18	0.458	0.536
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	638000	3570	15.19	16.00	1.205	-	-	0.01	0.769	0.927
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	645332	3679.98	15.22	16.00	1.197	-	-	0.09	0.777	0.930
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	638000	3570	15.19	16.00	1.205	-	-	0.06	0.863	1.040
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	645332	3679.98	15.22	16.00	1.197	-	-	-0.14	0.872	1.044
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	641666	3624.99	15.19	16.00	1.205	-	-	0.1	0.732	0.882
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	641666	3624.99	15.19	16.00	1.205	-	-	-0.05	1.000	1.205
	FR1 n48	40M	QPSK	50	28	DFT-30	Left Cheek	0mm	Ant 3	DSI 2	641666	3624.99	15.19	16.00	1.205	-	-	0.07	0.381	0.459
	FR1 n48	40M	QPSK	50	28	DFT-30	Left Tilted	0mm	Ant 3	DSI 2	641666	3624.99	15.19	16.00	1.205	-	-	0.14	0.481	0.580
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	638000	3570	15.07	16.00	1.239	-	-	0.07	0.807	1.000
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	645332	3679.98	15.09	16.00	1.233	-	-	0.06	0.815	1.005
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	638000	3570	15.07	16.00	1.239	-	-	0.08	0.906	1.122



FCC SAR Test Report

Report No. : FA420703

	FR1 n48	40M	QPSK	50	28	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	645332	3679.98	15.09	16.00	1.233	-	-	0.02	0.915	1.128
	FR1 n48	40M	QPSK	100	0	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	641666	3624.99	15.14	16.00	1.219	-	-	-0.1	0.681	0.830
	FR1 n48	40M	QPSK	100	0	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	641666	3624.99	15.14	16.00	1.219	-	-	-0.09	0.906	1.104
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	641666	3624.99	16.80	17.50	1.175	-	-	0.02	1.000	1.175
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 4	DSI 2	641666	3624.99	16.80	17.50	1.175	-	-	0.12	0.262	0.308
	FR1 n48	40M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 4	DSI 2	641666	3624.99	16.80	17.50	1.175	-	-	-0.17	0.350	0.411
	FR1 n48	40M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 4	DSI 2	641666	3624.99	16.80	17.50	1.175	-	-	0.18	0.132	0.155
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	638000	3570	16.73	17.50	1.194	-	-	0.12	0.869	1.038
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	645332	3679.98	16.59	17.50	1.233	-	-	0.04	0.945	1.165
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	641666	3624.99	16.69	17.50	1.205	-	-	-0.07	0.891	1.074
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Tilted	0mm	Ant 4	DSI 2	641666	3624.99	16.69	17.50	1.205	-	-	-0.06	0.234	0.282
	FR1 n48	40M	QPSK	50	28	DFT-30	Left Cheek	0mm	Ant 4	DSI 2	641666	3624.99	16.69	17.50	1.205	-	-	0.12	0.312	0.376
	FR1 n48	40M	QPSK	50	28	DFT-30	Left Tilted	0mm	Ant 4	DSI 2	641666	3624.99	16.69	17.50	1.205	-	-	0.14	0.118	0.142
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	638000	3570	16.62	17.50	1.225	-	-	0	0.774	0.948
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	645332	3679.98	16.47	17.50	1.268	-	-	0.16	0.842	1.067
	FR1 n48	40M	QPSK	100	0	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	641666	3624.99	16.62	17.50	1.225	-	-	0.1	0.883	1.081
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 6	DSI 2	641666	3624.99	13.16	14.00	1.213	-	-	-0.01	0.362	0.439
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 6	DSI 2	641666	3624.99	13.16	14.00	1.213	-	-	-0.1	0.454	0.551
	FR1 n48	40M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 6	DSI 2	641666	3624.99	13.16	14.00	1.213	-	-	-0.16	0.662	0.803
	FR1 n48	40M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	641666	3624.99	13.16	14.00	1.213	-	-	-0.13	0.937	1.137
	FR1 n48	40M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 6	DSI 2	638000	3570	13.13	14.00	1.222	-	-	0.09	0.596	0.728
	FR1 n48	40M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 6	DSI 2	645332	3679.98	13.07	14.00	1.239	-	-	-0.09	0.601	0.745
	FR1 n48	40M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	638000	3570	13.13	14.00	1.222	-	-	0.07	0.827	1.010
	FR1 n48	40M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	645332	3679.98	13.07	14.00	1.239	-	-	-0.05	0.803	0.995
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Cheek	0mm	Ant 6	DSI 2	641666	3624.99	13.11	14.00	1.227	-	-	-0.13	0.346	0.425
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Tilted	0mm	Ant 6	DSI 2	641666	3624.99	13.11	14.00	1.227	-	-	-0.1	0.434	0.533
	FR1 n48	40M	QPSK	50	28	DFT-30	Left Cheek	0mm	Ant 6	DSI 2	641666	3624.99	13.11	14.00	1.227	-	-	0.02	0.632	0.776
	FR1 n48	40M	QPSK	50	28	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	641666	3624.99	13.11	14.00	1.227	-	-	-0.03	0.895	1.099
	FR1 n48	40M	QPSK	50	28	DFT-30	Left Cheek	0mm	Ant 6	DSI 2	638000	3570	13.03	14.00	1.250	-	-	0.05	0.569	0.711
	FR1 n48	40M	QPSK	50	28	DFT-30	Left Cheek	0mm	Ant 6	DSI 2	645332	3679.98	13.00	14.00	1.259	-	-	-0.02	0.574	0.723
	FR1 n48	40M	QPSK	50	28	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	638000	3570	13.03	14.00	1.250	-	-	0.09	0.790	0.988
	FR1 n48	40M	QPSK	50	28	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	645332	3679.98	13.00	14.00	1.259	-	-	0.08	0.767	0.966
	FR1 n48	40M	QPSK	100	0	DFT-30	Left Cheek	0mm	Ant 6	DSI 2	641666	3624.99	13.01	14.00	1.256	-	-	-0.16	0.601	0.755
	FR1 n48	40M	QPSK	100	0	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	641666	3624.99	13.01	14.00	1.256	-	-	-0.13	0.856	1.075
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 8	DSI 2	641666	3624.99	18.39	19.00	1.151	-	-	0.03	0.866	0.997
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 8	DSI 2	641666	3624.99	18.39	19.00	1.151	-	-	-0.18	0.160	0.184
27	FR1 n48	40M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	641666	3624.99	18.39	19.00	1.151	-	-	-0.04	1.050	1.208
	FR1 n48	40M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 8	DSI 2	641666	3624.99	18.39	19.00	1.151	-	-	0.17	0.320	0.368
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 8	DSI 2	638000	3570	18.25	19.00	1.189	-	-	0.06	0.832	0.989
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 8	DSI 2	645332	3679.98	18.28	19.00	1.180	-	-	0.01	0.808	0.954
	FR1 n48	40M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	638000	3570	18.25	19.00	1.189	-	-	-0.02	1.000	1.189
	FR1 n48	40M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	645332	3679.98	18.28	19.00	1.180	-	-	-0.08	0.971	1.146
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Cheek	0mm	Ant 8	DSI 2	641666	3624.99	18.29	19.00	1.178	-	-	0.11	0.772	0.909
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Tilted	0mm	Ant 8	DSI 2	641666	3624.99	18.29	19.00	1.178	-	-	-0.08	0.143	0.168
	FR1 n48	40M	QPSK	50	28	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	641666	3624.99	18.29	19.00	1.178	-	-	0.18	0.936	1.102
	FR1 n48	40M	QPSK	50	28	DFT-30	Left Tilted	0mm	Ant 8	DSI 2	641666	3624.99	18.29	19.00	1.178	-	-	0.02	0.285	0.336
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Cheek	0mm	Ant 8	DSI 2	638000	3570	18.19	19.00	1.205	-	-	0.09	0.735	0.886
	FR1 n48	40M	QPSK	50	28	DFT-30	Right Cheek	0mm	Ant 8	DSI 2	645332	3679.98	18.20	19.00	1.202	-	-	0.01	0.724	0.870
	FR1 n48	40M	QPSK	50	28	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	638000	3570	18.19	19.00	1.205	-	-	0	0.891	1.074
	FR1 n48	40M	QPSK	50	28	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	645332	3679.98	18.20	19.00	1.202	-	-	-0.14	0.865	1.040
	FR1 n48	40M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 8	DSI 2	641666	3624.99	18.20	19.00	1.202	-	-	0.1	0.818	0.983
	FR1 n48	40M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	641666	3624.99	18.20	19.00	1.202	-	-	0.08	0.940	1.130
	FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	633332	3499.98	13.92	14.50	1.143	-	-	0.03	0.574	0.656
	FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	633332	3499.98	13.92	14.50	1.143	-	-	-0.16	0.667	0.762
	FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 3	DSI 2	633332	3499.98	13.92	14.50	1.143	-	-	0.18	0.293	0.335
	FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 3	DSI 2	633332	3499.98	13.92	14.50	1.143	-	-	0.18	0.376	0.430



FCC SAR Test Report

Report No. : FA420703

	FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	633332	3499.98	13.85	14.50	1.161	-	-	-0.09	0.580	0.674
	FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	633332	3499.98	13.85	14.50	1.161	-	-	0.06	0.697	0.810
	FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 3	DSI 2	633332	3499.98	13.85	14.50	1.161	-	-	0.01	0.303	0.352
	FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 3	DSI 2	633332	3499.98	13.85	14.50	1.161	-	-	-0.1	0.381	0.443
	FR1 n77_Part27Q HPUE	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	633332	3499.98	16.59	17.50	1.233	50	1.000	0.09	0.656	0.809
	FR1 n77_Part27Q	100M	QPSK	270	0	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	633332	3499.98	13.78	14.50	1.180	-	-	0.06	0.664	0.784
	FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	656000	3840	13.98	14.50	1.127	-	-	-0.09	0.756	0.852
	FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	656000	3840	13.98	14.50	1.127	-	-	-0.1	0.819	0.923
	FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 3	DSI 2	656000	3840	13.98	14.50	1.127	-	-	-0.04	0.413	0.466
	FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 3	DSI 2	656000	3840	13.98	14.50	1.127	-	-	0.06	0.539	0.608
	FR1 n77_Part27O HPUE	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	656000	3840	16.83	17.50	1.167	50	1.000	-0.15	0.861	1.005
	FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	656000	3840	13.90	14.50	1.148	-	-	0.07	0.713	0.819
	FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	656000	3840	13.90	14.50	1.148	-	-	-0.15	0.773	0.888
	FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 3	DSI 2	656000	3840	13.90	14.50	1.148	-	-	-0.02	0.391	0.449
	FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 3	DSI 2	656000	3840	13.90	14.50	1.148	-	-	-0.03	0.505	0.580
	FR1 n77_Part27O	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 3	DSI 2	656000	3840	13.85	14.50	1.161	-	-	0.01	0.705	0.819
	FR1 n77_Part27O	100M	QPSK	270	0	DFT-30	Right Tilted	0mm	Ant 3	DSI 2	656000	3840	13.85	14.50	1.161	-	-	0.06	0.768	0.892
	FR1 n77_Part27O	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 3	DSI 2	656000	3840	13.85	14.50	1.161	-	-	0.08	0.402	0.467
	FR1 n77_Part27O	100M	QPSK	270	0	DFT-30	Left Tilted	0mm	Ant 3	DSI 2	656000	3840	13.85	14.50	1.161	-	-	-0.08	0.498	0.578
	FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	633332	3499.98	15.35	16.00	1.161	-	-	0	0.935	1.086
	FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 4	DSI 2	633332	3499.98	15.35	16.00	1.161	-	-	-0.12	0.208	0.242
	FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 4	DSI 2	633332	3499.98	15.35	16.00	1.161	-	-	-0.11	0.293	0.340
	FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 4	DSI 2	633332	3499.98	15.35	16.00	1.161	-	-	0.18	0.127	0.148
	FR1 n77_Part27Q HPUE	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	633332	3499.98	18.27	19.00	1.183	50	1.000	-0.05	0.949	1.123
	FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	633332	3499.98	15.20	16.00	1.202	-	-	0.01	0.858	1.032
	FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 4	DSI 2	633332	3499.98	15.20	16.00	1.202	-	-	0.01	0.177	0.213
	FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 4	DSI 2	633332	3499.98	15.20	16.00	1.202	-	-	-0.16	0.264	0.317
	FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 4	DSI 2	633332	3499.98	15.20	16.00	1.202	-	-	-0.16	0.113	0.136
	FR1 n77_Part27Q	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	633332	3499.98	15.09	16.00	1.233	-	-	0.05	0.873	1.077
	FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	656000	3840	15.40	16.00	1.148	-	-	-0.06	0.807	0.927
	FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 4	DSI 2	656000	3840	15.40	16.00	1.148	-	-	-0.08	0.219	0.251
	FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 4	DSI 2	656000	3840	15.40	16.00	1.148	-	-	0.03	0.260	0.299
	FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 4	DSI 2	656000	3840	15.40	16.00	1.148	-	-	-0.16	0.091	0.104
	FR1 n77_Part27O HPUE	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	656000	3840	18.13	19.00	1.222	50	1.000	0.14	0.751	0.918
	FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	656000	3840	15.26	16.00	1.186	-	-	0.03	0.767	0.909
	FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 4	DSI 2	656000	3840	15.26	16.00	1.186	-	-	0.18	0.209	0.248
	FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 4	DSI 2	656000	3840	15.26	16.00	1.186	-	-	0.18	0.235	0.279
	FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 4	DSI 2	656000	3840	15.26	16.00	1.186	-	-	0.12	0.073	0.087
	FR1 n77_Part27O	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 4	DSI 2	656000	3840	15.21	16.00	1.199	-	-	-0.15	0.762	0.914
	FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 6	DSI 2	633332	3499.98	13.03	14.00	1.250	-	-	0.04	0.470	0.588
	FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 6	DSI 2	633332	3499.98	13.03	14.00	1.250	-	-	0.14	0.561	0.701
	FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 6	DSI 2	633332	3499.98	13.03	14.00	1.250	-	-	0.13	0.754	0.943
28	FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	633332	3499.98	13.03	14.00	1.250	-	-	-0.05	1.020	1.275
	FR1 n77_Part27Q HPUE	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	633332	3499.98	16.11	17.00	1.227	50	1.000	0.15	1.030	1.264
	FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 6	DSI 2	633332	3499.98	12.89	14.00	1.291	-	-	-0.17	0.435	0.562
	FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 6	DSI 2	633332	3499.98	12.89	14.00	1.291	-	-	-0.07	0.536	0.692
	FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 6	DSI 2	633332	3499.98	12.89	14.00	1.291	-	-	-0.18	0.716	0.925
	FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	633332	3499.98	12.89	14.00	1.291	-	-	0.17	0.958	1.237
	FR1 n77_Part27Q	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 6	DSI 2	633332	3499.98	12.83	14.00	1.309	-	-	0.14	0.712	0.932
	FR1 n77_Part27Q	100M	QPSK	270	0	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	633332	3499.98	12.83	14.00	1.309	-	-	0.02	0.963	1.261
	FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 6	DSI 2	656000	3840	13.29	14.00	1.178	-	-	0.09	0.362	0.426
	FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 6	DSI 2	656000	3840	13.29	14.00	1.178	-	-	-0.04	0.468	0.551
	FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 6	DSI 2	656000	3840	13.29	14.00	1.178	-	-	0.02	0.606	0.714
	FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	656000	3840	13.29	14.00	1.178	-	-	0.01	0.703	0.828
	FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	656000	3840	16.09	17.00	1.233	50	1.000	-0.14	0.659	0.813



FCC SAR Test Report

Report No. : FA420703

	HPUE																		
FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 6	DSI 2	656000	3840	13.18	14.00	1.208	-	-	-0.13	0.355	0.429
FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 6	DSI 2	656000	3840	13.18	14.00	1.208	-	-	0.16	0.442	0.534
FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 6	DSI 2	656000	3840	13.18	14.00	1.208	-	-	0.15	0.573	0.692
FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	656000	3840	13.18	14.00	1.208	-	-	-0.17	0.655	0.791
FR1 n77_Part27O	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 6	DSI 2	656000	3840	13.07	14.00	1.239	-	-	0.07	0.346	0.429
FR1 n77_Part27O	100M	QPSK	270	0	DFT-30	Right Tilted	0mm	Ant 6	DSI 2	656000	3840	13.07	14.00	1.239	-	-	0.01	0.436	0.540
FR1 n77_Part27O	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 6	DSI 2	656000	3840	13.07	14.00	1.239	-	-	-0.05	0.556	0.689
FR1 n77_Part27O	100M	QPSK	270	0	DFT-30	Left Tilted	0mm	Ant 6	DSI 2	656000	3840	13.07	14.00	1.239	-	-	0.09	0.646	0.800
FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 8	DSI 2	633332	3499.98	17.28	18.00	1.180	-	-	0.11	0.611	0.721
FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 8	DSI 2	633332	3499.98	17.28	18.00	1.180	-	-	-0.05	0.124	0.146
FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	633332	3499.98	17.28	18.00	1.180	-	-	-0.04	0.816	0.963
FR1 n77_Part27Q	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 8	DSI 2	633332	3499.98	17.28	18.00	1.180	-	-	0.1	0.224	0.264
FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 8	DSI 2	633332	3499.98	17.16	18.00	1.213	-	-	0.03	0.621	0.754
FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 8	DSI 2	633332	3499.98	17.16	18.00	1.213	-	-	-0.03	0.128	0.155
FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	633332	3499.98	17.16	18.00	1.213	-	-	0.01	0.856	1.039
FR1 n77_Part27Q	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 8	DSI 2	633332	3499.98	17.16	18.00	1.213	-	-	0.08	0.239	0.290
FR1 n77_Part27Q HPUE	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	633332	3499.98	20.03	21.00	1.250	50	1.000	0.05	0.822	1.028
FR1 n77_Part27Q	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	633332	3499.98	17.05	18.00	1.245	-	-	0.16	0.798	0.993
FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 8	DSI 2	656000	3840	17.40	18.00	1.148	-	-	0.04	0.872	1.001
FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 8	DSI 2	656000	3840	17.40	18.00	1.148	-	-	0.08	0.118	0.135
FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	656000	3840	17.40	18.00	1.148	-	-	0.18	0.982	1.127
FR1 n77_Part27O	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 8	DSI 2	656000	3840	17.40	18.00	1.148	-	-	-0.06	0.233	0.268
FR1 n77_Part27O HPUE	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	656000	3840	20.31	21.00	1.172	50	1.000	-0.17	1.010	1.184
FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 8	DSI 2	656000	3840	17.33	18.00	1.167	-	-	0.18	0.837	0.977
FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 8	DSI 2	656000	3840	17.33	18.00	1.167	-	-	0.15	0.098	0.114
FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	656000	3840	17.33	18.00	1.167	-	-	0.09	0.916	1.069
FR1 n77_Part27O	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 8	DSI 2	656000	3840	17.33	18.00	1.167	-	-	0.09	0.198	0.231
FR1 n77_Part27O	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 8	DSI 2	656000	3840	17.18	18.00	1.208	-	-	0.12	0.823	0.994
FR1 n77_Part27O	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 8	DSI 2	656000	3840	17.18	18.00	1.208	-	-	-0.15	0.927	1.120



UL MIMO

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
1750MHz																				
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 2+3	DSI 2	349000	1745	21.72	22.50	1.197	-	-	0.04	0.914	1.094
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 2+3	DSI 2	349000	1745	21.72	22.50	1.197	-	-	0.08	0.754	0.903
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 2+3	DSI 2	349000	1745	21.72	22.50	1.197	-	-	0.02	0.468	0.560
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 2+3	DSI 2	349000	1745	21.72	22.50	1.197	-	-	-0.11	0.423	0.506
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 2+3	DSI 2	349000	1745	21.68	22.50	1.207	-	-	-0.07	0.890	1.074
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 2+3	DSI 2	349000	1745	21.68	22.50	1.207	-	-	-0.02	0.763	0.921
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 2+3	DSI 2	349000	1745	21.68	22.50	1.207	-	-	-0.04	0.446	0.538
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 2+3	DSI 2	349000	1745	21.68	22.50	1.207	-	-	-0.05	0.431	0.520
	FR1 n66	40M	QPSK	216	0	DFT-15	Right Cheek	0mm	Ant 2+3	DSI 2	349000	1745	21.66	22.50	1.213	-	-	0.07	0.840	1.019
	FR1 n66	40M	QPSK	216	0	DFT-15	Right Tilted	0mm	Ant 2+3	DSI 2	349000	1745	21.66	22.50	1.213	-	-	0.12	0.736	0.893
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 2+1	DSI 2	349000	1745	22.59	23.00	1.099	-	-	-0.13	0.965	1.061
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 2+1	DSI 2	349000	1745	22.59	23.00	1.099	-	-	0.07	0.205	0.225
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 2+1	DSI 2	349000	1745	22.59	23.00	1.099	-	-	-0.01	0.511	0.562
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 2+1	DSI 2	349000	1745	22.59	23.00	1.099	-	-	-0.16	0.122	0.134
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 2+1	DSI 2	349000	1745	22.56	23.00	1.107	-	-	-0.08	0.954	1.056
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 2+1	DSI 2	349000	1745	22.56	23.00	1.107	-	-	0.15	0.193	0.214
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 2+1	DSI 2	349000	1745	22.56	23.00	1.107	-	-	0.06	0.427	0.473
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 2+1	DSI 2	349000	1745	22.56	23.00	1.107	-	-	-0.04	0.113	0.125
	FR1 n66	40M	QPSK	216	0	DFT-15	Right Cheek	0mm	Ant 2+1	DSI 2	349000	1745	22.53	23.00	1.113	-	-	-0.16	0.917	1.021
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 0+3	DSI 2	349000	1745	23.35	24.00	1.162	-	-	0.02	0.956	1.111
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 0+3	DSI 2	349000	1745	23.35	24.00	1.162	-	-	-0.11	0.948	1.102
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 0+3	DSI 2	349000	1745	23.35	24.00	1.162	-	-	0.06	0.421	0.489
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 0+3	DSI 2	349000	1745	23.35	24.00	1.162	-	-	-0.04	0.511	0.594
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 0+3	DSI 2	349000	1745	23.32	24.00	1.170	-	-	-0.13	0.932	1.091
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 0+3	DSI 2	349000	1745	23.32	24.00	1.170	-	-	0.14	0.919	1.075
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 0+3	DSI 2	349000	1745	23.32	24.00	1.170	-	-	0.11	0.409	0.479
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 0+3	DSI 2	349000	1745	23.32	24.00	1.170	-	-	-0.16	0.505	0.591
	FR1 n66	40M	QPSK	216	0	DFT-15	Right Cheek	0mm	Ant 0+3	DSI 2	349000	1745	23.28	24.00	1.181	-	-	-0.05	0.874	1.032
	FR1 n66	40M	QPSK	216	0	DFT-15	Right Tilted	0mm	Ant 0+3	DSI 2	349000	1745	23.28	24.00	1.181	-	-	0.09	0.879	1.038
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 0+1	DSI 2	349000	1745	26.51	27.00	1.119	-	-	0.03	0.197	0.220
	FR1 n66	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 0+1	DSI 2	349000	1745	26.51	27.00	1.119	-	-	0.04	0.079	0.088
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 0+1	DSI 2	349000	1745	26.51	27.00	1.119	-	-	-0.08	0.119	0.133
	FR1 n66	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 0+1	DSI 2	349000	1745	26.51	27.00	1.119	-	-	-0.15	0.081	0.091
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 0+1	DSI 2	349000	1745	26.39	27.00	1.150	-	-	-0.1	0.154	0.177
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 0+1	DSI 2	349000	1745	26.39	27.00	1.150	-	-	0.01	0.067	0.077
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 0+1	DSI 2	349000	1745	26.39	27.00	1.150	-	-	0.01	0.097	0.112
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 0+1	DSI 2	349000	1745	26.39	27.00	1.150	-	-	0.14	0.067	0.077
1900MHz																				
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 2+3	DSI 2	376500	1882.5	20.05	21.00	1.244	-	-	-0.07	0.960	1.194
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 2+3	DSI 2	376500	1882.5	20.05	21.00	1.244	-	-	0.09	0.837	1.041
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 2+3	DSI 2	376500	1882.5	20.05	21.00	1.244	-	-	-0.12	0.496	0.617
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 2+3	DSI 2	376500	1882.5	20.05	21.00	1.244	-	-	0.09	0.489	0.608
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 2+3	DSI 2	376500	1882.5	20.03	21.00	1.249	-	-	-0.13	0.915	1.143
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 2+3	DSI 2	376500	1882.5	20.03	21.00	1.249	-	-	0.16	0.773	0.966
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 2+3	DSI 2	376500	1882.5	20.03	21.00	1.249	-	-	-0.08	0.468	0.585
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 2+3	DSI 2	376500	1882.5	20.03	21.00	1.249	-	-	-0.07	0.457	0.571
	FR1 n25	40M	QPSK	216	0	DFT-15	Right Cheek	0mm	Ant 2+3	DSI 2	376500	1882.5	19.97	21.00	1.269	-	-	0.15	0.919	1.166
	FR1 n25	40M	QPSK	216	0	DFT-15	Right Tilted	0mm	Ant 2+3	DSI 2	376500	1882.5	19.97	21.00	1.269	-	-	-0.12	0.778	0.987
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 2+1	DSI 2	376500	1882.5	21.43	22.00	1.139	-	-	0.06	1.020	1.162
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 2+1	DSI 2	376500	1882.5	21.43	22.00	1.139	-	-	-0.16	0.187	0.213



FCC SAR Test Report

Report No. : FA420703

	FR1 n25	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 2+1	DSI 2	376500	1882.5	21.43	22.00	1.139	-	-	-0.02	0.531	0.605
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 2+1	DSI 2	376500	1882.5	21.43	22.00	1.139	-	-	-0.02	0.139	0.158
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 2+1	DSI 2	376500	1882.5	21.40	22.00	1.148	-	-	0.13	0.935	1.074
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 2+1	DSI 2	376500	1882.5	21.40	22.00	1.148	-	-	0.05	0.183	0.210
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 2+1	DSI 2	376500	1882.5	21.40	22.00	1.148	-	-	-0.12	0.525	0.603
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 2+1	DSI 2	376500	1882.5	21.40	22.00	1.148	-	-	-0.14	0.126	0.145
	FR1 n25	40M	QPSK	216	0	DFT-15	Right Cheek	0mm	Ant 2+1	DSI 2	376500	1882.5	21.38	22.00	1.154	-	-	0.04	0.922	1.064
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 0+3	DSI 2	376500	1882.5	21.83	22.50	1.167	-	-	-0.09	1.040	1.213
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 0+3	DSI 2	376500	1882.5	21.83	22.50	1.167	-	-	-0.08	0.941	1.098
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 0+3	DSI 2	376500	1882.5	21.83	22.50	1.167	-	-	0.02	0.495	0.577
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 0+3	DSI 2	376500	1882.5	21.83	22.50	1.167	-	-	0.03	0.527	0.615
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 0+3	DSI 2	376500	1882.5	21.81	22.50	1.173	-	-	0.06	0.940	1.103
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 0+3	DSI 2	376500	1882.5	21.81	22.50	1.173	-	-	0.05	0.841	0.987
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 0+3	DSI 2	376500	1882.5	21.81	22.50	1.173	-	-	0.07	0.466	0.547
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 0+3	DSI 2	376500	1882.5	21.81	22.50	1.173	-	-	-0.05	0.495	0.581
	FR1 n25	40M	QPSK	216	0	DFT-15	Right Cheek	0mm	Ant 0+3	DSI 2	376500	1882.5	21.80	22.50	1.176	-	-	0.1	0.951	1.118
	FR1 n25	40M	QPSK	216	0	DFT-15	Right Tilted	0mm	Ant 0+3	DSI 2	376500	1882.5	21.80	22.50	1.176	-	-	0	0.850	1.000
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Cheek	0mm	Ant 0+1	DSI 2	376500	1882.5	26.15	27.00	1.216	-	-	-0.16	0.150	0.182
	FR1 n25	40M	QPSK	1	1	DFT-15	Right Tilted	0mm	Ant 0+1	DSI 2	376500	1882.5	26.15	27.00	1.216	-	-	-0.01	0.069	0.084
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Cheek	0mm	Ant 0+1	DSI 2	376500	1882.5	26.15	27.00	1.216	-	-	0.07	0.087	0.106
	FR1 n25	40M	QPSK	1	1	DFT-15	Left Tilted	0mm	Ant 0+1	DSI 2	376500	1882.5	26.15	27.00	1.216	-	-	0.05	0.076	0.092
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 0+1	DSI 2	376500	1882.5	26.00	27.00	1.260	-	-	-0.07	0.170	0.214
	FR1 n25	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 0+1	DSI 2	376500	1882.5	26.00	27.00	1.260	-	-	0.08	0.082	0.103
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 0+1	DSI 2	376500	1882.5	26.00	27.00	1.260	-	-	0.12	0.110	0.139
	FR1 n25	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 0+1	DSI 2	376500	1882.5	26.00	27.00	1.260	-	-	-0.05	0.084	0.106
2600MHz																				
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 2+3	DSI 2	518598	2592.99	22.22	23.00	1.196	50	1.000	-0.07	0.352	0.421
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 2+3	DSI 2	518598	2592.99	22.22	23.00	1.196	50	1.000	0.1	0.276	0.330
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 2+3	DSI 2	518598	2592.99	22.22	23.00	1.196	50	1.000	-0.09	0.778	0.930
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 2+3	DSI 2	518598	2592.99	22.22	23.00	1.196	50	1.000	-0.07	0.191	0.228
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 2+3	DSI 2	518598	2592.99	22.19	23.00	1.206	50	1.000	-0.08	0.395	0.476
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 2+3	DSI 2	518598	2592.99	22.19	23.00	1.206	50	1.000	0.08	0.330	0.398
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 2+3	DSI 2	518598	2592.99	22.19	23.00	1.206	50	1.000	0.16	0.825	0.995
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 2+3	DSI 2	518598	2592.99	22.19	23.00	1.206	50	1.000	0.12	0.209	0.252
	FR1 n41_PC1.5	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 2+3	DSI 2	518598	2592.99	25.25	26.00	1.189	25	1.000	0.11	0.843	1.002
	FR1 n41_PC2	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 2+3	DSI 2	518598	2592.99	22.16	23.00	1.214	50	1.000	-0.09	0.789	0.958
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 2+1	DSI 2	518598	2592.99	22.54	23.50	1.249	50	1.000	0.08	0.352	0.440
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 2+1	DSI 2	518598	2592.99	22.54	23.50	1.249	50	1.000	0.12	0.092	0.115
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 2+1	DSI 2	518598	2592.99	22.54	23.50	1.249	50	1.000	0.09	0.860	1.074
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 2+1	DSI 2	518598	2592.99	22.54	23.50	1.249	50	1.000	-0.15	0.055	0.069
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 2+1	DSI 2	518598	2592.99	22.52	23.50	1.254	50	1.000	0.14	0.387	0.485
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 2+1	DSI 2	518598	2592.99	22.52	23.50	1.254	50	1.000	0.12	0.101	0.127
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 2+1	DSI 2	518598	2592.99	22.52	23.50	1.254	50	1.000	-0.15	0.951	1.193
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 2+1	DSI 2	518598	2592.99	22.52	23.50	1.254	50	1.000	-0.04	0.061	0.077
	FR1 n41_PC1.5	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 2+1	DSI 2	518598	2592.99	25.51	26.50	1.257	25	1.000	-0.05	0.897	1.128
	FR1 n41_PC2	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 2+1	DSI 2	518598	2592.99	22.48	23.50	1.266	50	1.000	-0.07	0.888	1.124
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 0+3	DSI 2	518598	2592.99	23.11	24.00	1.227	50	1.000	0.14	0.791	0.971
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 0+3	DSI 2	518598	2592.99	23.11	24.00	1.227	50	1.000	0.14	0.905	1.111
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 0+3	DSI 2	518598	2592.99	23.11	24.00	1.227	50	1.000	0.15	0.484	0.594
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 0+3	DSI 2	518598	2592.99	23.11	24.00	1.227	50	1.000	0.01	0.594	0.729
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 0+3	DSI 2	518598	2592.99	23.09	24.00	1.233	50	1.000	-0.01	0.806	0.994
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 0+3	DSI 2	518598	2592.99	23.09	24.00	1.233	50	1.000	0.01	0.926	1.142
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 0+3	DSI 2	518598	2592.99	23.09	24.00	1.233	50	1.000	0.14	0.515	0.635
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 0+3	DSI 2	518598	2592.99	23.09	24.00	1.233	50	1.000	-0.01	0.633	0.780
	FR1 n41_PC1.5	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 0+3	DSI 2	518598	2592.99	26.11	27.00	1.229	25	1.000	0.05	0.890	1.094
	FR1 n41_PC2	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 0+3	DSI 2	518598	2592.99	23.07	24.00	1.239	50	1.000	0.11	0.785	0.972



FCC SAR Test Report

Report No. : FA420703

	FR1 n41_PC2	100M	QPSK	270	0	DFT-30	Right Tilted	0mm	Ant 0+3	DSI 2	518598	2592.99	23.07	24.00	1.239	50	1.000	-0.09	0.880	1.090
	FR1 n41_PC2	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 0+3	DSI 2	518598	2592.99	23.07	24.00	1.239	50	1.000	0.09	0.506	0.627
	FR1 n41_PC2	100M	QPSK	270	0	DFT-30	Left Tilted	0mm	Ant 0+3	DSI 2	518598	2592.99	23.07	24.00	1.239	50	1.000	0.12	0.600	0.743
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 0+1	DSI 2	518598	2592.99	26.32	27.00	1.169	50	1.000	0.09	0.082	0.096
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 0+1	DSI 2	518598	2592.99	26.32	27.00	1.169	50	1.000	0.13	0.072	0.084
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 0+1	DSI 2	518598	2592.99	26.32	27.00	1.169	50	1.000	-0.01	0.146	0.171
	FR1 n41_PC2	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 0+1	DSI 2	518598	2592.99	26.32	27.00	1.169	50	1.000	-0.02	0.047	0.055
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 0+1	DSI 2	518598	2592.99	26.18	27.00	1.207	50	1.000	0.15	0.092	0.111
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 0+1	DSI 2	518598	2592.99	26.18	27.00	1.207	50	1.000	-0.13	0.085	0.103
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 0+1	DSI 2	518598	2592.99	26.18	27.00	1.207	50	1.000	-0.15	0.164	0.198
	FR1 n41_PC2	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 0+1	DSI 2	518598	2592.99	26.18	27.00	1.207	50	1.000	-0.05	0.054	0.065
	FR1 n41_PC1.5	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 0+1	DSI 2	518598	2592.99	28.70	30.00	1.349	25	1.000	-0.15	0.152	0.205
3G-4G																				
	FR1 n48	40M	QPSK	1	1	CP-30	Right Cheek	0mm	Ant 4+8	DSI 2	641666	3624.99	18.78	20.00	1.325	-	-	-0.02	0.752	0.996
	FR1 n48	40M	QPSK	1	1	CP-30	Right Tilted	0mm	Ant 4+8	DSI 2	641666	3624.99	18.78	20.00	1.325	-	-	0.1	0.509	0.674
	FR1 n48	40M	QPSK	1	1	CP-30	Left Cheek	0mm	Ant 4+8	DSI 2	641666	3624.99	18.78	20.00	1.325	-	-	-0.11	0.521	0.690
	FR1 n48	40M	QPSK	1	1	CP-30	Left Tilted	0mm	Ant 4+8	DSI 2	641666	3624.99	18.78	20.00	1.325	-	-	0.13	0.275	0.364
	FR1 n48	40M	QPSK	1	1	CP-30	Right Cheek	0mm	Ant 4+8	DSI 2	638000	3570	18.73	20.00	1.338	-	-	0.03	0.768	1.028
	FR1 n48	40M	QPSK	1	1	CP-30	Right Cheek	0mm	Ant 4+8	DSI 2	645332	3679.98	18.72	20.00	1.342	-	-	-0.07	0.826	1.108
	FR1 n48	40M	QPSK	1	1	CP-30	Right Tilted	0mm	Ant 4+8	DSI 2	638000	3570	18.73	20.00	1.338	-	-	-0.01	0.538	0.720
	FR1 n48	40M	QPSK	1	1	CP-30	Right Tilted	0mm	Ant 4+8	DSI 2	645332	3679.98	18.72	20.00	1.342	-	-	-0.02	0.550	0.738
	FR1 n48	40M	QPSK	1	1	CP-30	Left Cheek	0mm	Ant 4+8	DSI 2	638000	3570	18.73	20.00	1.338	-	-	0.08	0.544	0.728
	FR1 n48	40M	QPSK	1	1	CP-30	Left Cheek	0mm	Ant 4+8	DSI 2	645332	3679.98	18.72	20.00	1.342	-	-	-0.01	0.585	0.785
	FR1 n48	40M	QPSK	53	27	CP-30	Right Cheek	0mm	Ant 4+8	DSI 2	641666	3624.99	18.74	20.00	1.337	-	-	-0.16	0.753	1.007
	FR1 n48	40M	QPSK	53	27	CP-30	Right Tilted	0mm	Ant 4+8	DSI 2	641666	3624.99	18.74	20.00	1.337	-	-	-0.11	0.526	0.703
	FR1 n48	40M	QPSK	53	27	CP-30	Left Cheek	0mm	Ant 4+8	DSI 2	641666	3624.99	18.74	20.00	1.337	-	-	-0.05	0.532	0.711
	FR1 n48	40M	QPSK	53	27	CP-30	Left Tilted	0mm	Ant 4+8	DSI 2	641666	3624.99	18.74	20.00	1.337	-	-	0.13	0.273	0.365
	FR1 n48	40M	QPSK	53	27	CP-30	Right Cheek	0mm	Ant 4+8	DSI 2	638000	3570	18.71	20.00	1.345	-	-	0.14	0.779	1.047
	FR1 n48	40M	QPSK	53	27	CP-30	Right Cheek	0mm	Ant 4+8	DSI 2	645332	3679.98	18.66	20.00	1.360	-	-	0.01	0.854	1.162
	FR1 n48	40M	QPSK	53	27	CP-30	Right Tilted	0mm	Ant 4+8	DSI 2	638000	3570	18.71	20.00	1.345	-	-	0.02	0.516	0.694
	FR1 n48	40M	QPSK	53	27	CP-30	Right Tilted	0mm	Ant 4+8	DSI 2	645332	3679.98	18.66	20.00	1.360	-	-	0.07	0.552	0.751
	FR1 n48	40M	QPSK	53	27	CP-30	Left Cheek	0mm	Ant 4+8	DSI 2	638000	3570	18.71	20.00	1.345	-	-	-0.02	0.556	0.748
	FR1 n48	40M	QPSK	53	27	CP-30	Left Cheek	0mm	Ant 4+8	DSI 2	645332	3679.98	18.66	20.00	1.360	-	-	0.09	0.605	0.823
	FR1 n48	40M	QPSK	106	0	CP-30	Right Cheek	0mm	Ant 4+8	DSI 2	641666	3624.99	18.71	20.00	1.345	-	-	-0.06	0.698	0.939
	FR1 n48	40M	QPSK	106	0	CP-30	Right Tilted	0mm	Ant 4+8	DSI 2	641666	3624.99	18.71	20.00	1.345	-	-	-0.11	0.506	0.680
	FR1 n48	40M	QPSK	106	0	CP-30	Left Cheek	0mm	Ant 4+8	DSI 2	641666	3624.99	18.71	20.00	1.345	-	-	0.08	0.526	0.707
	FR1 n48	40M	QPSK	1	1	CP-30	Right Cheek	0mm	Ant 4+6	DSI 2	641666	3624.99	16.15	17.50	1.364	-	-	-0.04	0.564	0.769
	FR1 n48	40M	QPSK	1	1	CP-30	Right Tilted	0mm	Ant 4+6	DSI 2	641666	3624.99	16.15	17.50	1.364	-	-	0.04	0.509	0.694
	FR1 n48	40M	QPSK	1	1	CP-30	Left Cheek	0mm	Ant 4+6	DSI 2	641666	3624.99	16.15	17.50	1.364	-	-	-0.05	0.637	0.869
	FR1 n48	40M	QPSK	1	1	CP-30	Left Tilted	0mm	Ant 4+6	DSI 2	641666	3624.99	16.15	17.50	1.364	-	-	0.15	0.694	0.947
	FR1 n48	40M	QPSK	1	1	CP-30	Right Cheek	0mm	Ant 4+6	DSI 2	638000	3570	16.11	17.50	1.379	-	-	-0.1	0.576	0.794
	FR1 n48	40M	QPSK	1	1	CP-30	Right Cheek	0mm	Ant 4+6	DSI 2	645332	3679.98	16.06	17.50	1.393	-	-	-0.05	0.635	0.884
	FR1 n48	40M	QPSK	1	1	CP-30	Right Tilted	0mm	Ant 4+6	DSI 2	638000	3570	16.11	17.50	1.379	-	-	-0.09	0.517	0.713
	FR1 n48	40M	QPSK	1	1	CP-30	Right Tilted	0mm	Ant 4+6	DSI 2	645332	3679.98	16.06	17.50	1.393	-	-	-0.05	0.565	0.787
	FR1 n48	40M	QPSK	1	1	CP-30	Left Cheek	0mm	Ant 4+6	DSI 2	638000	3570	16.11	17.50	1.379	-	-	-0.07	0.607	0.837
	FR1 n48	40M	QPSK	1	1	CP-30	Left Cheek	0mm	Ant 4+6	DSI 2	645332	3679.98	16.06	17.50	1.393	-	-	-0.05	0.664	0.925
	FR1 n48	40M	QPSK	1	1	CP-30	Left Tilted	0mm	Ant 4+6	DSI 2	638000	3570	16.11	17.50	1.379	-	-	0.09	0.645	0.889
	FR1 n48	40M	QPSK	1	1	CP-30	Left Tilted	0mm	Ant 4+6	DSI 2	645332	3679.98	16.06	17.50	1.393	-	-	0.07	0.739	1.029
	FR1 n48	40M	QPSK	53	27	CP-30	Right Cheek	0mm	Ant 4+6	DSI 2	641666	3624.99	16.13	17.50	1.372	-	-	0.05	0.608	0.834
	FR1 n48	40M	QPSK	53	27	CP-30	Right Tilted	0mm	Ant 4+6	DSI 2	641666	3624.99	16.13	17.50	1.372	-	-	0.07	0.526	0.722
	FR1 n48	40M	QPSK	53	27	CP-30	Left Cheek	0mm	Ant 4+6	DSI 2	641666	3624.99	16.13	17.50	1.372	-	-	0.13	0.646	0.886
	FR1 n48	40M	QPSK	53	27	CP-30	Left Tilted	0mm	Ant 4+6	DSI 2	641666	3624.99	16.13	17.50	1.372	-	-	-0.09	0.694	0.952
	FR1 n48	40M	QPSK	53	27	CP-30	Right Cheek	0mm	Ant 4+6	DSI 2	638000	3570	16.08	17.50	1.387	-	-	-0.06	0.576	0.799
	FR1 n48	40M	QPSK	53	27	CP-30	Right Cheek	0mm	Ant 4+6	DSI 2	645332	3679.98	16.01	17.50	1.410	-	-	0.02	0.635	0.895
	FR1 n48	40M	QPSK	53	27	CP-30	Right Tilted	0mm	Ant 4+6	DSI 2	638000	3570	16.08	17.50	1.387	-	-	-0.08	0.517	0.717
	FR1 n48	40M	QPSK	53	27	CP-30	Right Tilted	0mm	Ant 4+6	DSI 2	645332	3679.98	16.01	17.50	1.410	-	-	0.03	0.565	0.797



FCC SAR Test Report

Report No. : FA420703

	FR1 n48	40M	QPSK	53	27	CP-30	Left Cheek	0mm	Ant 4+6	DSI 2	638000	3570	16.08	17.50	1.387	-	-	-0.03	0.606	0.840
	FR1 n48	40M	QPSK	53	27	CP-30	Left Cheek	0mm	Ant 4+6	DSI 2	645332	3679.98	16.01	17.50	1.410	-	-	0.08	0.675	0.952
	FR1 n48	40M	QPSK	53	27	CP-30	Left Tilted	0mm	Ant 4+6	DSI 2	638000	3570	16.08	17.50	1.387	-	-	-0.13	0.681	0.944
	FR1 n48	40M	QPSK	53	27	CP-30	Left Tilted	0mm	Ant 4+6	DSI 2	645332	3679.98	16.01	17.50	1.410	-	-	0.09	0.745	1.050
	FR1 n48	40M	QPSK	106	0	CP-30	Right Cheek	0mm	Ant 4+6	DSI 2	641666	3624.99	16.04	17.50	1.398	-	-	0.04	0.583	0.815
	FR1 n48	40M	QPSK	106	0	CP-30	Right Tilted	0mm	Ant 4+6	DSI 2	641666	3624.99	16.04	17.50	1.398	-	-	-0.04	0.472	0.660
	FR1 n48	40M	QPSK	106	0	CP-30	Left Cheek	0mm	Ant 4+6	DSI 2	641666	3624.99	16.04	17.50	1.398	-	-	-0.16	0.606	0.847
	FR1 n48	40M	QPSK	106	0	CP-30	Left Tilted	0mm	Ant 4+6	DSI 2	641666	3624.99	16.04	17.50	1.398	-	-	0.06	0.649	0.907
	FR1 n48	40M	QPSK	1	1	CP-30	Right Cheek	0mm	Ant 3+8	DSI 2	641666	3624.99	16.56	18.00	1.395	-	-	-0.14	0.611	0.852
	FR1 n48	40M	QPSK	1	1	CP-30	Right Tilted	0mm	Ant 3+8	DSI 2	641666	3624.99	16.56	18.00	1.395	-	-	-0.03	0.661	0.922
	FR1 n48	40M	QPSK	1	1	CP-30	Left Cheek	0mm	Ant 3+8	DSI 2	641666	3624.99	16.56	18.00	1.395	-	-	-0.08	0.467	0.651
	FR1 n48	40M	QPSK	1	1	CP-30	Left Tilted	0mm	Ant 3+8	DSI 2	641666	3624.99	16.56	18.00	1.395	-	-	0.15	0.426	0.594
	FR1 n48	40M	QPSK	1	1	CP-30	Right Cheek	0mm	Ant 3+8	DSI 2	638000	3570	16.51	18.00	1.411	-	-	-0.04	0.609	0.859
	FR1 n48	40M	QPSK	1	1	CP-30	Right Cheek	0mm	Ant 3+8	DSI 2	645332	3679.98	16.48	18.00	1.421	-	-	0.04	0.645	0.916
	FR1 n48	40M	QPSK	1	1	CP-30	Right Tilted	0mm	Ant 3+8	DSI 2	638000	3570	16.51	18.00	1.411	-	-	0.08	0.710	1.002
	FR1 n48	40M	QPSK	1	1	CP-30	Right Tilted	0mm	Ant 3+8	DSI 2	645332	3679.98	16.48	18.00	1.421	-	-	0.09	0.813	1.155
	FR1 n48	40M	QPSK	1	1	CP-30	Left Cheek	0mm	Ant 3+8	DSI 2	638000	3570	16.51	18.00	1.411	-	-	-0.07	0.473	0.667
	FR1 n48	40M	QPSK	1	1	CP-30	Left Cheek	0mm	Ant 3+8	DSI 2	645332	3679.98	16.48	18.00	1.421	-	-	0.01	0.500	0.710
	FR1 n48	40M	QPSK	1	1	CP-30	Left Tilted	0mm	Ant 3+8	DSI 2	638000	3570	16.51	18.00	1.411	-	-	0.07	0.441	0.622
	FR1 n48	40M	QPSK	1	1	CP-30	Left Tilted	0mm	Ant 3+8	DSI 2	645332	3679.98	16.48	18.00	1.421	-	-	0.06	0.467	0.663
	FR1 n48	40M	QPSK	53	27	CP-30	Right Cheek	0mm	Ant 3+8	DSI 2	641666	3624.99	16.53	18.00	1.403	-	-	0.14	0.621	0.871
	FR1 n48	40M	QPSK	53	27	CP-30	Right Tilted	0mm	Ant 3+8	DSI 2	641666	3624.99	16.53	18.00	1.403	-	-	0.14	0.726	1.018
	FR1 n48	40M	QPSK	53	27	CP-30	Left Cheek	0mm	Ant 3+8	DSI 2	641666	3624.99	16.53	18.00	1.403	-	-	-0.05	0.473	0.663
	FR1 n48	40M	QPSK	53	27	CP-30	Left Tilted	0mm	Ant 3+8	DSI 2	641666	3624.99	16.53	18.00	1.403	-	-	0.06	0.444	0.623
	FR1 n48	40M	QPSK	53	27	CP-30	Right Cheek	0mm	Ant 3+8	DSI 2	638000	3570	16.49	18.00	1.416	-	-	0.01	0.632	0.895
	FR1 n48	40M	QPSK	53	27	CP-30	Right Cheek	0mm	Ant 3+8	DSI 2	645332	3679.98	16.46	18.00	1.427	-	-	0.02	0.669	0.955
	FR1 n48	40M	QPSK	53	27	CP-30	Right Tilted	0mm	Ant 3+8	DSI 2	638000	3570	16.49	18.00	1.416	-	-	0.09	0.743	1.052
	FR1 n48	40M	QPSK	53	27	CP-30	Right Tilted	0mm	Ant 3+8	DSI 2	645332	3679.98	16.46	18.00	1.427	-	-	0.03	0.786	1.122
	FR1 n48	40M	QPSK	53	27	CP-30	Left Cheek	0mm	Ant 3+8	DSI 2	638000	3570	16.49	18.00	1.416	-	-	0.07	0.491	0.695
	FR1 n48	40M	QPSK	53	27	CP-30	Left Cheek	0mm	Ant 3+8	DSI 2	645332	3679.98	16.46	18.00	1.427	-	-	-0.1	0.519	0.741
	FR1 n48	40M	QPSK	53	27	CP-30	Left Tilted	0mm	Ant 3+8	DSI 2	638000	3570	16.49	18.00	1.416	-	-	0.07	0.458	0.648
	FR1 n48	40M	QPSK	53	27	CP-30	Left Tilted	0mm	Ant 3+8	DSI 2	645332	3679.98	16.46	18.00	1.427	-	-	0.04	0.485	0.692
	FR1 n48	40M	QPSK	106	0	CP-30	Right Cheek	0mm	Ant 3+8	DSI 2	641666	3624.99	16.50	18.00	1.412	-	-	-0.01	0.576	0.814
	FR1 n48	40M	QPSK	106	0	CP-30	Right Tilted	0mm	Ant 3+8	DSI 2	641666	3624.99	16.50	18.00	1.412	-	-	0.15	0.676	0.955
	FR1 n48	40M	QPSK	106	0	CP-30	Left Cheek	0mm	Ant 3+8	DSI 2	641666	3624.99	16.50	18.00	1.412	-	-	-0.11	0.433	0.612
	FR1 n48	40M	QPSK	106	0	CP-30	Left Tilted	0mm	Ant 3+8	DSI 2	641666	3624.99	16.50	18.00	1.412	-	-	0.14	0.402	0.568
	FR1 n48	40M	QPSK	1	1	CP-30	Right Cheek	0mm	Ant 3+6	DSI 2	641666	3624.99	15.22	17.00	1.508	-	-	-0.04	0.571	0.861
	FR1 n48	40M	QPSK	1	1	CP-30	Right Tilted	0mm	Ant 3+6	DSI 2	641666	3624.99	15.22	17.00	1.508	-	-	-0.13	0.668	1.007
	FR1 n48	40M	QPSK	1	1	CP-30	Left Cheek	0mm	Ant 3+6	DSI 2	641666	3624.99	15.22	17.00	1.508	-	-	-0.06	0.521	0.785
	FR1 n48	40M	QPSK	1	1	CP-30	Left Tilted	0mm	Ant 3+6	DSI 2	641666	3624.99	15.22	17.00	1.508	-	-	0.15	0.706	1.064
	FR1 n48	40M	QPSK	1	1	CP-30	Right Cheek	0mm	Ant 3+6	DSI 2	638000	3570	15.17	17.00	1.525	-	-	0.1	0.564	0.860
	FR1 n48	40M	QPSK	1	1	CP-30	Right Cheek	0mm	Ant 3+6	DSI 2	645332	3679.98	15.13	17.00	1.539	-	-	-0.06	0.588	0.905
	FR1 n48	40M	QPSK	1	1	CP-30	Right Tilted	0mm	Ant 3+6	DSI 2	638000	3570	15.17	17.00	1.525	-	-	-0.06	0.663	1.011
	FR1 n48	40M	QPSK	1	1	CP-30	Right Tilted	0mm	Ant 3+6	DSI 2	645332	3679.98	15.13	17.00	1.539	-	-	0.1	0.691	1.064
	FR1 n48	40M	QPSK	1	1	CP-30	Left Cheek	0mm	Ant 3+6	DSI 2	638000	3570	15.17	17.00	1.525	-	-	-0.02	0.538	0.820
	FR1 n48	40M	QPSK	1	1	CP-30	Left Cheek	0mm	Ant 3+6	DSI 2	645332	3679.98	15.13	17.00	1.539	-	-	0.04	0.562	0.865
	FR1 n48	40M	QPSK	1	1	CP-30	Left Tilted	0mm	Ant 3+6	DSI 2	638000	3570	15.17	17.00	1.525	-	-	-0.05	0.715	1.090
	FR1 n48	40M	QPSK	1	1	CP-30	Left Tilted	0mm	Ant 3+6	DSI 2	645332	3679.98	15.13	17.00	1.539	-	-	0.03	0.739	1.137
	FR1 n48	40M	QPSK	53	27	CP-30	Right Cheek	0mm	Ant 3+6	DSI 2	641666	3624.99	15.19	17.00	1.516	-	-	-0.15	0.617	0.935
	FR1 n48	40M	QPSK	53	27	CP-30	Right Tilted	0mm	Ant 3+6	DSI 2	641666	3624.99	15.19	17.00	1.516	-	-	-0.04	0.672	1.018
	FR1 n48	40M	QPSK	53	27	CP-30	Left Cheek	0mm	Ant 3+6	DSI 2	641666	3624.99	15.19	17.00	1.516	-	-	0.16	0.534	0.809
	FR1 n48	40M	QPSK	53	27	CP-30	Left Tilted	0mm	Ant 3+6	DSI 2	641666	3624.99	15.19	17.00	1.516	-	-	-0.12	0.696	1.055
	FR1 n48	40M	QPSK	53	27	CP-30	Right Cheek	0mm	Ant 3+6	DSI 2	638000	3570	15.11	17.00	1.544	-	-	-0.07	0.577	0.891
	FR1 n48	40M	QPSK	53	27	CP-30	Right Cheek	0mm	Ant 3+6	DSI 2	645332	3679.98	15.09	17.00	1.551	-	-	0.03	0.602	0.934
	FR1 n48	40M	QPSK	53	27	CP-30	Right Tilted	0mm	Ant 3+6	DSI 2	638000	3570	15.11	17.00	1.544	-	-	0.1	0.678	1.047
	FR1 n48	40M	QPSK	53	27	CP-30	Right Tilted	0mm	Ant 3+6	DSI 2	645332	3679.98	15.09	17.00	1.551	-	-	0.03	0.707	1.097



FCC SAR Test Report

Report No. : FA420703

	FR1 n48	40M	QPSK	53	27	CP-30	Left Cheek	0mm	Ant 3+6	DSI 2	638000	3570	15.11	17.00	1.544	-	-	-0.01	0.551	0.851
	FR1 n48	40M	QPSK	53	27	CP-30	Left Cheek	0mm	Ant 3+6	DSI 2	645332	3679.98	15.09	17.00	1.551	-	-	0.1	0.575	0.892
	FR1 n48	40M	QPSK	53	27	CP-30	Left Tilted	0mm	Ant 3+6	DSI 2	638000	3570	15.11	17.00	1.544	-	-	-0.07	0.726	1.121
	FR1 n48	40M	QPSK	53	27	CP-30	Left Tilted	0mm	Ant 3+6	DSI 2	645332	3679.98	15.09	17.00	1.551	-	-	0.02	0.758	1.176
	FR1 n48	40M	QPSK	106	0	CP-30	Right Cheek	0mm	Ant 3+6	DSI 2	641666	3624.99	15.16	17.00	1.529	-	-	0.04	0.569	0.870
	FR1 n48	40M	QPSK	106	0	CP-30	Right Tilted	0mm	Ant 3+6	DSI 2	641666	3624.99	15.16	17.00	1.529	-	-	-0.1	0.640	0.978
	FR1 n48	40M	QPSK	106	0	CP-30	Left Cheek	0mm	Ant 3+6	DSI 2	641666	3624.99	15.16	17.00	1.529	-	-	0.12	0.506	0.773
	FR1 n48	40M	QPSK	106	0	CP-30	Left Tilted	0mm	Ant 3+6	DSI 2	641666	3624.99	15.16	17.00	1.529	-	-	-0.1	0.678	1.036
	FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 4+8	DSI 2	633332	3499.98	21.71	22.50	1.201	50	1.000	0.08	0.903	1.084
	FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 4+8	DSI 2	633332	3499.98	21.71	22.50	1.201	50	1.000	0.09	0.245	0.294
	FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 4+8	DSI 2	633332	3499.98	21.71	22.50	1.201	50	1.000	-0.1	0.341	0.409
	FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 4+8	DSI 2	633332	3499.98	21.71	22.50	1.201	50	1.000	-0.08	0.179	0.215
	FR1 n77_Part27Q PC1.5	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 4+8	DSI 2	633332	3499.98	24.67	25.50	1.211	25	1.000	0.05	0.836	1.012
	FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 4+8	DSI 2	633332	3499.98	21.67	22.50	1.210	50	1.000	-0.05	0.851	1.030
	FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 4+8	DSI 2	633332	3499.98	21.67	22.50	1.210	50	1.000	-0.03	0.203	0.246
	FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 4+8	DSI 2	633332	3499.98	21.67	22.50	1.210	50	1.000	0.13	0.332	0.402
	FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 4+8	DSI 2	633332	3499.98	21.67	22.50	1.210	50	1.000	-0.06	0.159	0.192
	FR1 n77_Part27Q PC2	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 4+8	DSI 2	633332	3499.98	21.60	22.50	1.232	50	1.000	-0.04	0.851	1.048
	FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 4+8	DSI 2	656000	3840	21.73	22.50	1.194	50	1.000	0.15	0.746	0.891
	FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 4+8	DSI 2	656000	3840	21.73	22.50	1.194	50	1.000	0.03	0.208	0.248
	FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 4+8	DSI 2	656000	3840	21.73	22.50	1.194	50	1.000	-0.14	0.493	0.589
	FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 4+8	DSI 2	656000	3840	21.73	22.50	1.194	50	1.000	0.1	0.132	0.158
	FR1 n77_Part27Q PC1.5	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 4+8	DSI 2	656000	3840	24.74	25.50	1.191	25	1.000	0.16	0.764	0.910
	FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 4+8	DSI 2	656000	3840	21.70	22.50	1.202	50	1.000	0.14	0.641	0.771
	FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 4+8	DSI 2	656000	3840	21.70	22.50	1.202	50	1.000	-0.08	0.175	0.210
	FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 4+8	DSI 2	656000	3840	21.70	22.50	1.202	50	1.000	-0.09	0.452	0.543
	FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 4+8	DSI 2	656000	3840	21.70	22.50	1.202	50	1.000	0.01	0.125	0.150
	FR1 n77_Part27Q PC2	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 4+8	DSI 2	656000	3840	21.68	22.50	1.209	50	1.000	0.03	0.679	0.821
	FR1 n77_Part27Q PC2	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 4+8	DSI 2	656000	3840	21.68	22.50	1.209	50	1.000	0.09	0.486	0.588
	FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 4+6	DSI 2	633332	3499.98	19.29	20.00	1.177	50	1.000	-0.08	0.784	0.923
	FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 4+6	DSI 2	633332	3499.98	19.29	20.00	1.177	50	1.000	0.01	0.532	0.626
	FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 4+6	DSI 2	633332	3499.98	19.29	20.00	1.177	50	1.000	0.16	0.826	0.972
	FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 4+6	DSI 2	633332	3499.98	19.29	20.00	1.177	50	1.000	0.14	0.979	1.152
	FR1 n77_Part27Q PC1.5	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 4+6	DSI 2	633332	3499.98	22.26	23.00	1.187	25	1.000	-0.05	0.960	1.139
	FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 4+6	DSI 2	633332	3499.98	19.28	20.00	1.181	50	1.000	0.01	0.751	0.887
	FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 4+6	DSI 2	633332	3499.98	19.28	20.00	1.181	50	1.000	-0.01	0.499	0.589
	FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 4+6	DSI 2	633332	3499.98	19.28	20.00	1.181	50	1.000	0.1	0.793	0.937
	FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 4+6	DSI 2	633332	3499.98	19.28	20.00	1.181	50	1.000	-0.07	0.936	1.106
	FR1 n77_Part27Q PC2	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 4+6	DSI 2	633332	3499.98	19.18	20.00	1.209	50	1.000	0.09	0.759	0.917
	FR1 n77_Part27Q PC2	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 4+6	DSI 2	633332	3499.98	19.18	20.00	1.209	50	1.000	-0.11	0.786	0.950
	FR1 n77_Part27Q PC2	100M	QPSK	270	0	DFT-30	Left Tilted	0mm	Ant 4+6	DSI 2	633332	3499.98	19.18	20.00	1.209	50	1.000	0.13	0.914	1.105
	FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 4+6	DSI 2	656000	3840	19.16	20.00	1.215	50	1.000	-0.03	0.456	0.554



FCC SAR Test Report

Report No. : FA420703

FR1 n77_Part270 PC2	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 4+6	DSI 2	656000	3840	19.16	20.00	1.215	50	1.000	0.08	0.362	0.440
FR1 n77_Part270 PC2	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 4+6	DSI 2	656000	3840	19.16	20.00	1.215	50	1.000	-0.01	0.485	0.589
FR1 n77_Part270 PC2	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 4+6	DSI 2	656000	3840	19.16	20.00	1.215	50	1.000	-0.07	0.592	0.719
FR1 n77_Part270 PC1.5	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 4+6	DSI 2	656000	3840	22.28	23.00	1.182	25	1.000	0.15	0.602	0.711
FR1 n77_Part270 PC2	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 4+6	DSI 2	656000	3840	19.13	20.00	1.223	50	1.000	0.05	0.385	0.471
FR1 n77_Part270 PC2	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 4+6	DSI 2	656000	3840	19.13	20.00	1.223	50	1.000	-0.16	0.333	0.407
FR1 n77_Part270 PC2	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 4+6	DSI 2	656000	3840	19.13	20.00	1.223	50	1.000	-0.12	0.459	0.561
FR1 n77_Part270 PC2	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 4+6	DSI 2	656000	3840	19.13	20.00	1.223	50	1.000	-0.13	0.546	0.668
FR1 n77_Part270 PC2	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 4+6	DSI 2	656000	3840	19.07	20.00	1.239	50	1.000	0.07	0.419	0.519
FR1 n77_Part270 PC2	100M	QPSK	270	0	DFT-30	Right Tilted	0mm	Ant 4+6	DSI 2	656000	3840	19.07	20.00	1.239	50	1.000	0.05	0.303	0.375
FR1 n77_Part270 PC2	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 4+6	DSI 2	656000	3840	19.07	20.00	1.239	50	1.000	-0.09	0.468	0.580
FR1 n77_Part270 PC2	100M	QPSK	270	0	DFT-30	Left Tilted	0mm	Ant 4+6	DSI 2	656000	3840	19.07	20.00	1.239	50	1.000	0.15	0.567	0.702
FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 3+8	DSI 2	633332	3499.98	19.76	20.50	1.186	50	1.000	0.07	0.619	0.734
FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 3+8	DSI 2	633332	3499.98	19.76	20.50	1.186	50	1.000	-0.15	0.798	0.947
FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 3+8	DSI 2	633332	3499.98	19.76	20.50	1.186	50	1.000	-0.09	0.537	0.637
FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 3+8	DSI 2	633332	3499.98	19.76	20.50	1.186	50	1.000	-0.09	0.426	0.505
FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 3+8	DSI 2	633332	3499.98	19.71	20.50	1.200	50	1.000	0.06	0.675	0.810
FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 3+8	DSI 2	633332	3499.98	19.71	20.50	1.200	50	1.000	0.12	0.830	0.996
FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 3+8	DSI 2	633332	3499.98	19.71	20.50	1.200	50	1.000	0.14	0.546	0.655
FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 3+8	DSI 2	633332	3499.98	19.71	20.50	1.200	50	1.000	-0.15	0.477	0.572
FR1 n77_Part27Q PC1.5	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 3+8	DSI 2	633332	3499.98	22.66	23.50	1.213	25	1.000	0.16	0.846	1.027
FR1 n77_Part27Q PC2	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 3+8	DSI 2	633332	3499.98	19.67	20.50	1.210	50	1.000	0.05	0.626	0.757
FR1 n77_Part27Q PC2	100M	QPSK	270	0	DFT-30	Right Tilted	0mm	Ant 3+8	DSI 2	633332	3499.98	19.67	20.50	1.210	50	1.000	0.11	0.786	0.951
FR1 n77_Part270 PC2	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 3+8	DSI 2	656000	3840	19.81	20.50	1.173	50	1.000	0.13	0.576	0.676
FR1 n77_Part270 PC2	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 3+8	DSI 2	656000	3840	19.81	20.50	1.173	50	1.000	-0.15	0.760	0.892
FR1 n77_Part270 PC2	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 3+8	DSI 2	656000	3840	19.81	20.50	1.173	50	1.000	-0.02	0.356	0.418
FR1 n77_Part270 PC2	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 3+8	DSI 2	656000	3840	19.81	20.50	1.173	50	1.000	0.15	0.442	0.519
FR1 n77_Part270 PC1.5	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 3+8	DSI 2	656000	3840	22.76	23.50	1.186	25	1.000	-0.15	0.707	0.838
FR1 n77_Part270 PC2	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 3+8	DSI 2	656000	3840	19.74	20.50	1.192	50	1.000	-0.01	0.534	0.637
FR1 n77_Part270 PC2	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 3+8	DSI 2	656000	3840	19.74	20.50	1.192	50	1.000	0.06	0.694	0.828
FR1 n77_Part270 PC2	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 3+8	DSI 2	656000	3840	19.74	20.50	1.192	50	1.000	0.12	0.316	0.377
FR1 n77_Part270 PC2	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 3+8	DSI 2	656000	3840	19.74	20.50	1.192	50	1.000	-0.05	0.407	0.485
FR1 n77_Part270 PC2	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 3+8	DSI 2	656000	3840	19.70	20.50	1.202	50	1.000	0.07	0.555	0.667
FR1 n77_Part270 PC2	100M	QPSK	270	0	DFT-30	Right Tilted	0mm	Ant 3+8	DSI 2	656000	3840	19.70	20.50	1.202	50	1.000	-0.14	0.706	0.849
FR1 n77_Part270 PC2	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 3+8	DSI 2	656000	3840	19.70	20.50	1.202	50	1.000	0.06	0.346	0.416
FR1 n77_Part270 PC2	100M	QPSK	270	0	DFT-30	Left Tilted	0mm	Ant 3+8	DSI 2	656000	3840	19.70	20.50	1.202	50	1.000	0.01	0.439	0.528
FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 3+6	DSI 2	633332	3499.98	18.70	19.50	1.202	50	1.000	-0.12	0.402	0.483
FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 3+6	DSI 2	633332	3499.98	18.70	19.50	1.202	50	1.000	0.09	0.499	0.600
FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 3+6	DSI 2	633332	3499.98	18.70	19.50	1.202	50	1.000	-0.13	0.754	0.906
FR1 n77_Part27Q PC2	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 3+6	DSI 2	633332	3499.98	18.70	19.50	1.202	50	1.000	0.05	0.950	1.142



FCC SAR Test Report

Report No. : FA420703

FR1 n77_Part27Q PC1.5	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 3+6	DSI 2	633332	3499.98	21.79	22.50	1.177	25	1.000	-0.06	0.939	1.106
FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 3+6	DSI 2	633332	3499.98	18.68	19.50	1.208	50	1.000	-0.02	0.386	0.466
FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 3+6	DSI 2	633332	3499.98	18.68	19.50	1.208	50	1.000	0.13	0.468	0.565
FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 3+6	DSI 2	633332	3499.98	18.68	19.50	1.208	50	1.000	0.11	0.676	0.816
FR1 n77_Part27Q PC2	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 3+6	DSI 2	633332	3499.98	18.68	19.50	1.208	50	1.000	0.02	0.897	1.083
FR1 n77_Part27Q PC2	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 3+6	DSI 2	633332	3499.98	18.62	19.50	1.226	50	1.000	0.03	0.730	0.895
FR1 n77_Part27Q PC2	100M	QPSK	270	0	DFT-30	Left Tilted	0mm	Ant 3+6	DSI 2	633332	3499.98	18.62	19.50	1.226	50	1.000	-0.13	0.891	1.092
FR1 n77_Part27O PC2	100M	QPSK	1	1	DFT-30	Right Cheek	0mm	Ant 3+6	DSI 2	656000	3840	18.78	19.50	1.182	50	1.000	-0.1	0.477	0.564
FR1 n77_Part27O PC2	100M	QPSK	1	1	DFT-30	Right Tilted	0mm	Ant 3+6	DSI 2	656000	3840	18.78	19.50	1.182	50	1.000	-0.05	0.597	0.705
FR1 n77_Part27O PC2	100M	QPSK	1	1	DFT-30	Left Cheek	0mm	Ant 3+6	DSI 2	656000	3840	18.78	19.50	1.182	50	1.000	0.02	0.649	0.767
FR1 n77_Part27O PC2	100M	QPSK	1	1	DFT-30	Left Tilted	0mm	Ant 3+6	DSI 2	656000	3840	18.78	19.50	1.182	50	1.000	-0.11	0.738	0.872
FR1 n77_Part27O PC2	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 3+6	DSI 2	656000	3840	18.74	19.50	1.191	50	1.000	0	0.499	0.594
FR1 n77_Part27O PC2	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 3+6	DSI 2	656000	3840	18.74	19.50	1.191	50	1.000	0.11	0.642	0.765
FR1 n77_Part27O PC2	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 3+6	DSI 2	656000	3840	18.74	19.50	1.191	50	1.000	0.11	0.703	0.837
FR1 n77_Part27O PC2	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 3+6	DSI 2	656000	3840	18.74	19.50	1.191	50	1.000	0.13	0.786	0.936
FR1 n77_Part27O PC1.5	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 3+6	DSI 2	656000	3840	21.81	22.50	1.172	25	1.000	0.13	0.749	0.878
FR1 n77_Part27O PC2	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 3+6	DSI 2	656000	3840	18.72	19.50	1.198	50	1.000	0.06	0.468	0.561
FR1 n77_Part27O PC2	100M	QPSK	270	0	DFT-30	Right Tilted	0mm	Ant 3+6	DSI 2	656000	3840	18.72	19.50	1.198	50	1.000	0.03	0.609	0.730
FR1 n77_Part27O PC2	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 3+6	DSI 2	656000	3840	18.72	19.50	1.198	50	1.000	0.06	0.646	0.774
FR1 n77_Part27O PC2	100M	QPSK	270	0	DFT-30	Left Tilted	0mm	Ant 3+6	DSI 2	656000	3840	18.72	19.50	1.198	50	1.000	-0.04	0.705	0.845