



TEST REPORT

FCC Part 27

Report Reference No.: **HK2402210730-12E**

FCC ID : **2AM6L-MIN2**

Compiled by
(position+printed name+signature)...: File administrators Len Liao

Len Liao

Supervised by
(position+printed name+signature)...: Technique principal Sliver Wan

Sliver Wan

Approved by
(position+printed name+signature)...: Manager Jason Zhou

Jason Zhou

Date of issue.....: Mar. 07, 2024

Testing Laboratory Name: **Shenzhen HUAKE Testing Technology Co., Ltd.**

Address.....: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name: **Streamax Technology Co., Ltd.**

Address.....: 21-23/F, Building B1, Zhiyuan, No. 1001, Xueyuan Avenue, Nanshan
District, Shenzhen, Guangdong 518055, China

Test specification :

Standard: **FCC Part 27**

Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: MDVR

Trade Mark: N/A

Manufacturer: **Streamax Technology Co., Ltd.**

Model/Type reference.....: M1N 2.0

Listed Models: N/A

Ratings.....: DC 12V from DC Power

Modulation: QPSK, 16QAM

Hardware version: V1.0

Software version: V1.0

Frequency.....: LTE Band 71 :663MHz - 698 MHz

Result.....: **PASS**



TEST REPORT

Test Report No. :

HK2402210730-12E

Mar. 07, 2024

Date of issue

Equipment under Test : MDVR

Model /Type : M1N 2.0

Series Models : N/A

Applicant : Streamax Technology Co., Ltd.

Address : 21-23/F, Building B1, Zhiyuan, No. 1001, Xueyuan Avenue, Nanshan District, Shenzhen, Guangdong 518055, China

Manufacturer : Streamax Technology Co., Ltd.

Address : 21-23/F, Building B1, Zhiyuan, No. 1001, Xueyuan Avenue, Nanshan District, Shenzhen, Guangdong 518055, China

Test result

Pass

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Contents

| | | |
|----------|--|-----------|
| 1 | SUMMARY | 4 |
| 1.1 | TEST STANDARDS | 4 |
| 1.2 | Test Description | 4 |
| 1.3 | Information of the Test Laboratory | 5 |
| 1.4 | Statement of the measurement uncertainty | 5 |
| 2 | GENERAL INFORMATION | 6 |
| 2.1 | Environmental conditions | 6 |
| 2.2 | Description of Test Modes | 6 |
| 2.3 | Test frequency list | 6 |
| 2.4 | Equipments Used during the Test | 7 |
| 2.5 | Modifications | 7 |
| 3 | TEST CONDITIONS AND RESULTS | 8 |
| 3.1 | Output Power | 8 |
| 3.3 | Peak-to-Average Ratio (PAR) | 13 |
| 3.4 | Occupied Bandwidth and Emission Bandwidth | 18 |
| 3.5 | Band Edge compliance | 23 |
| 3.6 | Spurious Emission | 28 |
| 3.7 | Frequency Stability under Temperature & Voltage Variations | 58 |
| 4 | TEST SETUP PHOTOS OF THE EUT | 60 |
| 5 | PHOTOS OF THE EUT | 61 |

**1.1 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Part 27](#) : MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

47 CFR FCC Part 15 Subpart B: - Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[KDB971168 D01 v03r01](#): MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

1.2 Test Description

| Test Item | FCC /IC Rule No. | Result |
|--|----------------------------------|--------|
| RF Output Power | Part 2.1046 Part 27.50(c)(10) | Pass |
| Peak-to-Average Ratio | Part 2.1046 | Pass |
| 99% & -26 dB Occupied Bandwidth | Part 2.1049 | Pass |
| Spurious Emissions at Antenna Terminal | Part 2.1051 Part 27.53(g) | Pass |
| Field Strength of Spurious Radiation | Part 2.1053 Part 27.53(g) | Pass |
| Out of band emission, Band Edge | Part 2.1051 Part 27.53(g) | Pass |
| Frequency stability | Part 2.1055 Part 27.54 | Pass |



1.3 Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.
FCC Designation Number is CN1229.
Canada IC CAB identifier is CN0045.
CNAS Registration Number is L9589.

1.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen HUAKE Testing Technology Co., Ltd.. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen HUAKE Testing Technology Co., Ltd.

| Test | Range | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission | 30~1000MHz | 4.10dB | (1) |
| Radiated Emission | Above 1GHz | 4.32dB | (1) |
| Conducted Disturbance | 0.15~30MHz | 3.20dB | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



2 GENERAL INFORMATION

2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|---------------------|---------|
| Normal Temperature: | 25°C |
| Relative Humidity: | 55 % |
| Air Pressure: | 101 kPa |

2.2 Description of Test Modes

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Note:

1. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.
2. Test method and refer to 3GPP TS136521.

2.3 Test frequency list

| TX Channel Bandwidth | Frequency (MHz) | channel |
|----------------------|-----------------|---------|
| 5 MHz | 665.5 | 133147 |
| | 680.5 | 133297 |
| | 695.5 | 133447 |
| 10 MHz | 668 | 133172 |
| | 680.5 | 133297 |
| | 693 | 133422 |
| 15 MHz | 670.5 | 133197 |
| | 680.5 | 133297 |
| | 690.5 | 133397 |
| 20 MHz | 673 | 133222 |
| | 680.5 | 133297 |
| | 688 | 133372 |



2.4 Equipments Used during the Test

| Test Equipment | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Due Date |
|---------------------------------|--------------|-------------|------------|------------------|----------------------|
| LISN | ENV216 | R&S | HKE-059 | 2024/02/20 | 2025/02/19 |
| LISN | R&S | ENV216 | HKE-002 | 2024/02/20 | 2025/02/19 |
| Broadband antenna | Schwarzbeck | VULB 9163 | HKE-012 | 2024/02/21 | 2026/02/20 |
| Receiver | R&S | ESR-7 | HKE-010 | 2024/02/20 | 2025/02/19 |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | 2024/02/20 | 2025/02/19 |
| RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | 2024/02/20 | 2025/02/19 |
| Horn antenna | Schwarzbeck | 9120D | HKE-013 | 2024/02/21 | 2026/02/20 |
| Loop antenna | Schwarzbeck | FMZB 1519 B | HKE-014 | 2024/02/21 | 2026/02/20 |
| Preamplifier | EMCI | EMC051845SE | HKE-015 | 2024/02/20 | 2025/02/19 |
| Preamplifier | Agilent | 83051A | HKE-016 | 2024/02/20 | 2025/02/19 |
| Temperature and humidity meter | Boyang | HTC-1 | HKE-075 | 2024/02/20 | 2025/02/19 |
| High pass filter unit | Tonscend | JS0806-F | HKE-055 | 2024/02/20 | 2025/02/19 |
| RF cable | Times | 1-40G | HKE-034 | 2024/02/20 | 2025/02/19 |
| Power meter | Agilent | E4419B | HKE-085 | 2024/02/20 | 2025/02/19 |
| Power Sensor | Agilent | E9300A | HKE-086 | 2024/02/20 | 2025/02/19 |
| Wireless Communication Test Set | R&S | CMW500 | HKE-026 | 2024/02/20 | 2025/02/19 |
| Wireless Communication Test Set | R&S | CMU200 | HKE-029 | 2024/02/21 | 2026/02/20 |
| High gain antenna | Schwarzbeck | LB-180400KF | HKE-054 | 2024/02/21 | 2026/02/20 |
| Horn antenna | Schwarzbeck | 9120D | HKE-135 | 2024/02/21 | 2026/02/20 |
| High gain antenna | Schwarzbeck | LB-180400KF | HKE-128 | 2024/02/21 | 2026/02/20 |
| Broadband antenna | Schwarzbeck | VULB 9163 | HKE-087 | 2024/02/20 | 2026/02/19 |
| Signal generator | Agilent | E4433B | HKE-120 | 2024/02/20 | 2025/02/19 |
| Signal generator | Agilent | E4421B | HKE-121 | 2024/02/20 | 2025/02/19 |

2.5 Modifications

No modifications were implemented to meet testing criteria.



3 TEST CONDITIONS AND RESULTS


3.1 Output Power

LIMIT


Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are FCC limited to 3 watts ERP."IC limited to 5 watts ERP."

TEST CONFIGURATION

Conducted Power Measurement

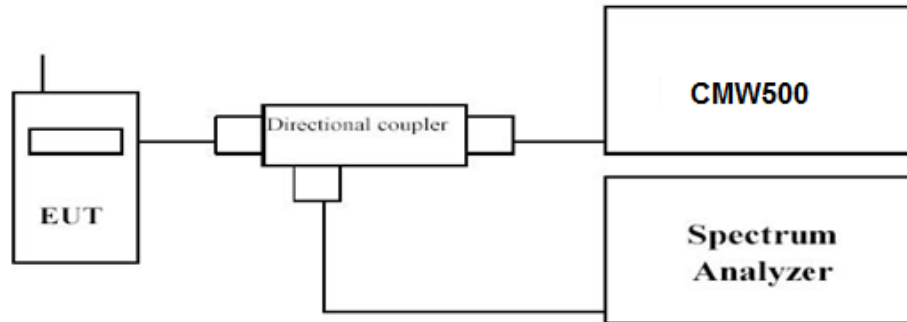

Radiated Power Measurement:

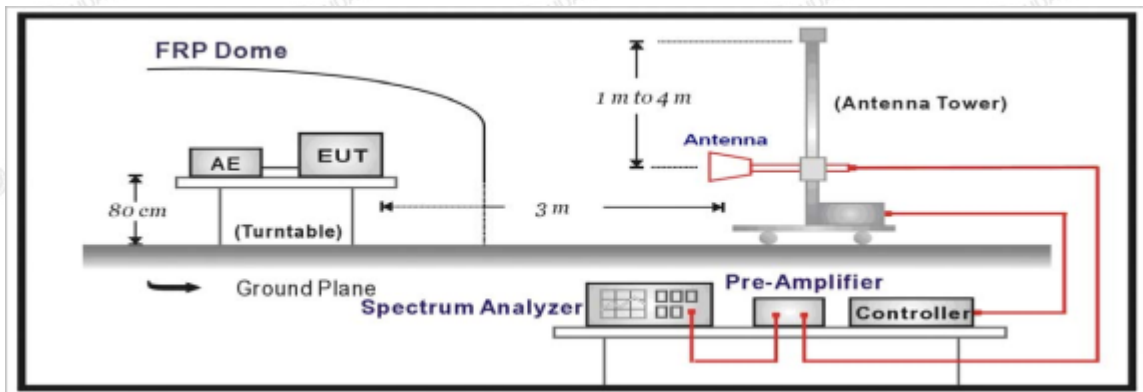

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.



- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4.

TEST RESULTS

Conducted Measurement:

| LTE FDD Band 71 | | | | |
|----------------------|----------------|-----------------|---------------------|-------|
| TX Channel Bandwidth | RB Size/Offset | Frequency (MHz) | Average Power [dBm] | |
| | | | QPSK | 16QAM |
| 5 MHz | 1 RB low | 665.5 | 23.53 | 22.60 |
| | | 680.5 | 23.73 | 22.63 |
| | | 695.5 | 23.81 | 22.67 |
| | 1 RB high | 665.5 | 22.68 | 21.73 |
| | | 680.5 | 22.66 | 21.81 |
| | | 695.5 | 22.69 | 21.79 |
| | 50% RB mid | 665.5 | 22.63 | 21.61 |
| | | 680.5 | 23.84 | 22.09 |
| | | 695.5 | 23.60 | 22.58 |
| | 100% RB | 665.5 | 23.45 | 22.24 |
| | | 680.5 | 22.60 | 21.80 |
| | | 695.5 | 22.68 | 21.68 |
| 10 MHz | 1 RB low | 668 | 23.53 | 22.45 |
| | | 680.5 | 23.88 | 23.46 |
| | | 693 | 23.85 | 22.91 |
| | 1 RB high | 668 | 22.66 | 21.73 |
| | | 680.5 | 22.65 | 21.65 |
| | | 693 | 22.93 | 21.66 |
| | 50% RB mid | 668 | 22.90 | 21.88 |
| | | 680.5 | 23.52 | 22.77 |
| | | 693 | 23.68 | 22.60 |
| | 100% RB | 668 | 23.53 | 22.48 |
| | | 680.5 | 22.69 | 21.64 |
| | | 693 | 22.72 | 21.60 |
| 15 MHz | 1 RB low | 670.5 | 23.57 | 22.93 |
| | | 680.5 | 23.50 | 22.66 |
| | | 690.5 | 23.66 | 23.04 |
| | 1 RB high | 670.5 | 22.92 | 23.14 |
| | | 680.5 | 23.65 | 23.50 |
| | | 690.5 | 22.99 | 22.98 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



| | | | | |
|--------|------------|-------|-------|-------|
| | 50% RB mid | 670.5 | 22.65 | 21.78 |
| | | 680.5 | 23.66 | 22.92 |
| | | 690.5 | 23.45 | 22.69 |
| | 100% RB | 670.5 | 23.81 | 22.81 |
| | | 680.5 | 22.91 | 23.00 |
| | | 690.5 | 23.09 | 23.07 |
| 20 MHz | 1 RB low | 673 | 23.41 | 22.65 |
| | | 680.5 | 23.94 | 23.10 |
| | | 688 | 23.51 | 22.51 |
| | 1 RB high | 673 | 22.86 | 21.89 |
| | | 680.5 | 22.75 | 21.87 |
| | | 688 | 22.76 | 21.89 |
| | 50% RB mid | 673 | 22.86 | 21.90 |
| | | 680.5 | 23.78 | 23.20 |
| | | 688 | 23.73 | 22.52 |
| | 100% RB | 673 | 23.24 | 22.50 |
| | | 680.5 | 22.73 | 21.73 |
| | | 688 | 22.66 | 21.69 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 71; recorded worst case for each Channel Bandwidth of LTE FDD Band 71.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$
3. $ERP = EIRP - 2.15dBi$ as EIRP by subtracting the gain of the dipole.

LTE FDD Band 71_Channel Bandwidth 5MHz_QPSK

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | Correction (dB) | P _{Ag} (dB) | ERP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-----------|-------------|--------------|
| 665.5 | -16.26 | 2.38 | 8.23 | 2.15 | 36.7 | 24.14 | 34.77 | V |
| 680.5 | -15.62 | 2.4 | 8.29 | 2.15 | 36.7 | 24.82 | 34.77 | V |
| 695.5 | -16.75 | 2.43 | 8.28 | 2.15 | 36.7 | 23.65 | 34.77 | V |
| 665.5 | -16.04 | 2.38 | 8.23 | 2.15 | 36.7 | 24.36 | 34.77 | H |
| 680.5 | -16.4 | 2.4 | 8.29 | 2.15 | 36.7 | 24.04 | 34.77 | H |
| 695.5 | -16.71 | 2.43 | 8.28 | 2.15 | 36.7 | 23.69 | 34.77 | H |

LTE FDD Band 71_Channel Bandwidth 10MHz_QPSK

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | Correction (dB) | P _{Ag} (dB) | ERP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-----------|-------------|--------------|
| 668 | -15.75 | 2.38 | 8.23 | 2.15 | 36.7 | 24.65 | 34.77 | V |
| 680.5 | -15.6 | 2.4 | 8.29 | 2.15 | 36.7 | 24.84 | 34.77 | V |
| 693 | -16.41 | 2.43 | 8.28 | 2.15 | 36.7 | 23.99 | 34.77 | V |
| 668 | -15.55 | 2.38 | 8.23 | 2.15 | 36.7 | 24.85 | 34.77 | H |
| 680.5 | -15.18 | 2.4 | 8.29 | 2.15 | 36.7 | 25.26 | 34.77 | H |
| 693 | -14.94 | 2.43 | 8.28 | 2.15 | 36.7 | 25.46 | 34.77 | H |

LTE FDD Band 71_Channel Bandwidth 15MHz_QPSK

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | Correction (dB) | P _{Ag} (dB) | ERP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-----------|-------------|--------------|
| 670.5 | -16.63 | 2.38 | 8.23 | 2.15 | 36.7 | 23.77 | 34.77 | V |
| 680.5 | -15.42 | 2.4 | 8.29 | 2.15 | 36.7 | 25.02 | 34.77 | V |
| 690.5 | -15.93 | 2.43 | 8.28 | 2.15 | 36.7 | 24.47 | 34.77 | V |
| 670.5 | -14.78 | 2.38 | 8.23 | 2.15 | 36.7 | 25.62 | 34.77 | H |
| 680.5 | -14.96 | 2.4 | 8.29 | 2.15 | 36.7 | 25.48 | 34.77 | H |
| 690.5 | -16.1 | 2.43 | 8.28 | 2.15 | 36.7 | 24.3 | 34.77 | H |

LTE FDD Band 71_Channel Bandwidth 20MHz_QPSK

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | Correction (dB) | P _{Ag} (dB) | ERP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-----------|-------------|--------------|
| 673 | -15.05 | 2.38 | 8.23 | 2.15 | 36.7 | 25.35 | 34.77 | V |
| 680.5 | -15.98 | 2.4 | 8.29 | 2.15 | 36.7 | 24.46 | 34.77 | V |
| 688 | -16.71 | 2.43 | 8.28 | 2.15 | 36.7 | 23.69 | 34.77 | V |
| 673 | -16.21 | 2.38 | 8.23 | 2.15 | 36.7 | 24.19 | 34.77 | H |
| 680.5 | -14.67 | 2.4 | 8.29 | 2.15 | 36.7 | 25.77 | 34.77 | H |
| 688 | -15.77 | 2.43 | 8.28 | 2.15 | 36.7 | 24.63 | 34.77 | H |

**LTE FDD Band 71_Channel Bandwidth 5MHz_16QAM**

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | Correction (dB) | P _{Ag} (dB) | ERP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-----------|-------------|--------------|
| 665.5 | -16.18 | 2.38 | 8.23 | 2.15 | 36.7 | 24.22 | 34.77 | V |
| 680.5 | -16.52 | 2.4 | 8.29 | 2.15 | 36.7 | 23.92 | 34.77 | V |
| 695.5 | -16.33 | 2.43 | 8.28 | 2.15 | 36.7 | 24.07 | 34.77 | V |
| 665.5 | -16.61 | 2.38 | 8.23 | 2.15 | 36.7 | 23.79 | 34.77 | H |
| 680.5 | -15.63 | 2.4 | 8.29 | 2.15 | 36.7 | 24.81 | 34.77 | H |
| 695.5 | -16.61 | 2.43 | 8.28 | 2.15 | 36.7 | 23.79 | 34.77 | H |

LTE FDD Band 71_Channel Bandwidth 10MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | Correction (dB) | P _{Ag} (dB) | ERP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-----------|-------------|--------------|
| 668 | -15.88 | 2.38 | 8.23 | 2.15 | 36.7 | 24.52 | 34.77 | V |
| 680.5 | -16.67 | 2.4 | 8.29 | 2.15 | 36.7 | 23.77 | 34.77 | V |
| 693 | -17.05 | 2.43 | 8.28 | 2.15 | 36.7 | 23.35 | 34.77 | V |
| 668 | -15.83 | 2.38 | 8.23 | 2.15 | 36.7 | 24.57 | 34.77 | H |
| 680.5 | -16.24 | 2.4 | 8.29 | 2.15 | 36.7 | 24.2 | 34.77 | H |
| 693 | -16.96 | 2.43 | 8.28 | 2.15 | 36.7 | 23.44 | 34.77 | H |

LTE FDD Band 71_Channel Bandwidth 15MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | Correction (dB) | P _{Ag} (dB) | ERP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-----------|-------------|--------------|
| 670.5 | -15.57 | 2.38 | 8.23 | 2.15 | 36.7 | 24.83 | 34.77 | V |
| 680.5 | -15.91 | 2.4 | 8.29 | 2.15 | 36.7 | 24.53 | 34.77 | V |
| 690.5 | -16.8 | 2.43 | 8.28 | 2.15 | 36.7 | 23.6 | 34.77 | V |
| 670.5 | -15.99 | 2.38 | 8.23 | 2.15 | 36.7 | 24.41 | 34.77 | H |
| 680.5 | -15.15 | 2.4 | 8.29 | 2.15 | 36.7 | 25.29 | 34.77 | H |
| 690.5 | -16.27 | 2.43 | 8.28 | 2.15 | 36.7 | 24.13 | 34.77 | H |

LTE FDD Band 71_Channel Bandwidth 20MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | Correction (dB) | P _{Ag} (dB) | ERP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-----------|-------------|--------------|
| 673 | -15.82 | 2.38 | 8.23 | 2.15 | 36.7 | 24.58 | 34.77 | V |
| 680.5 | -16.37 | 2.4 | 8.29 | 2.15 | 36.7 | 24.07 | 34.77 | V |
| 688 | -15.87 | 2.43 | 8.28 | 2.15 | 36.7 | 24.53 | 34.77 | V |
| 673 | -16.01 | 2.38 | 8.23 | 2.15 | 36.7 | 24.39 | 34.77 | H |
| 680.5 | -16.04 | 2.4 | 8.29 | 2.15 | 36.7 | 24.4 | 34.77 | H |
| 688 | -15.81 | 2.43 | 8.28 | 2.15 | 36.7 | 24.59 | 34.77 | H |




3.3 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

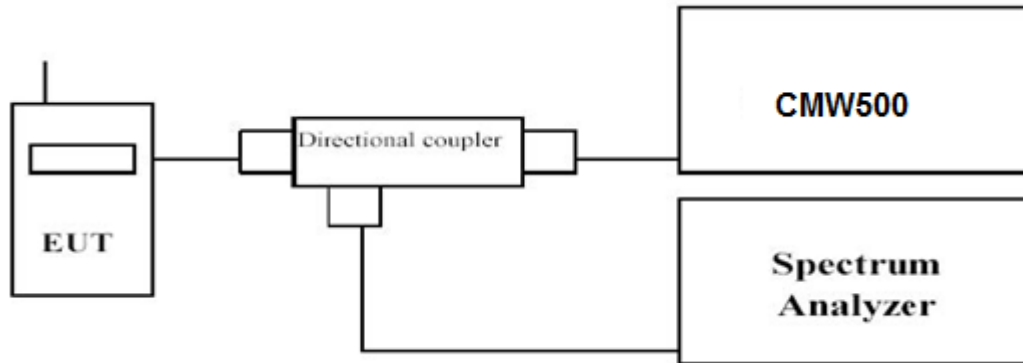

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms,
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 71; recorded worst case for each Channel Bandwidth of LTE FDD Band 71.

| LTE FDD Band 71 | | | | |
|----------------------|-----------------|----------------|-----------|-------|
| TX Channel Bandwidth | Frequency (MHz) | RB Size/Offset | PAPR (dB) | |
| | | | QPSK | 16QAM |
| 5MHz | 665.5 | 1RB#0 | 4.00 | 4.86 |
| | 680.5 | | 4.24 | 5.09 |
| | 695.5 | | 8.50 | 5.19 |
| 10MHz | 668 | 1RB#0 | 3.90 | 4.86 |
| | 680.5 | | 4.24 | 5.13 |
| | 693 | | 4.24 | 7.35 |
| 15MHz | 670.5 | 1RB#0 | 8.43 | 4.88 |
| | 680.5 | | 4.06 | 4.95 |
| | 690.5 | | 4.18 | 8.45 |
| 20MHz | 673 | 1RB#0 | 8.47 | 4.73 |
| | 680.5 | | 3.91 | 4.75 |
| | 688 | | 4.18 | 8.48 |




LTE FDD Band 71-5MHz Channel Bandwidth PAPR



QPSK

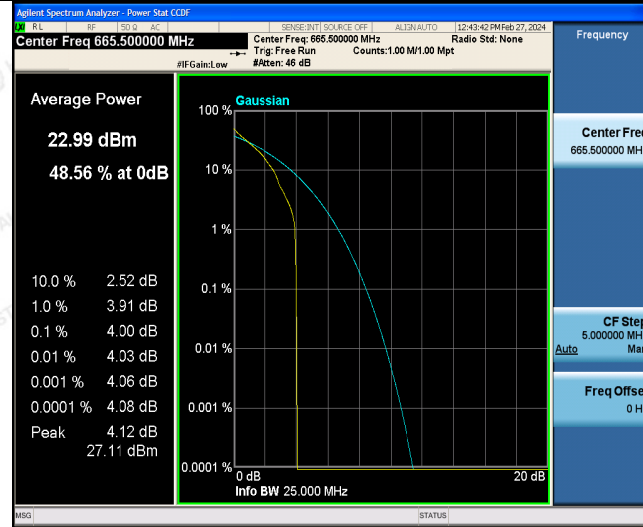



16QAM

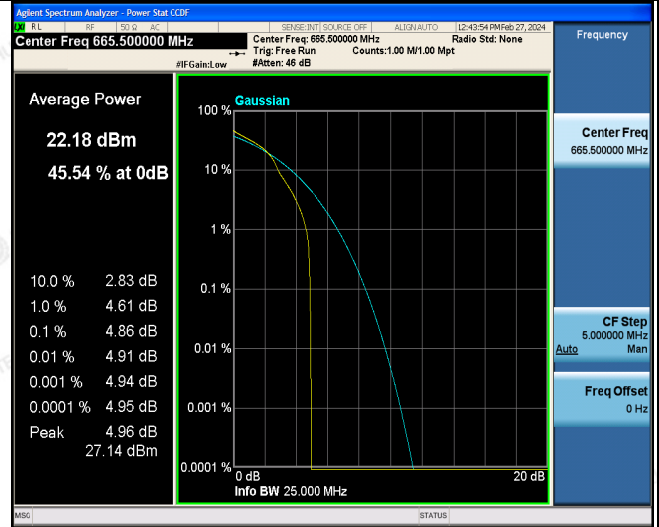

Low Channel

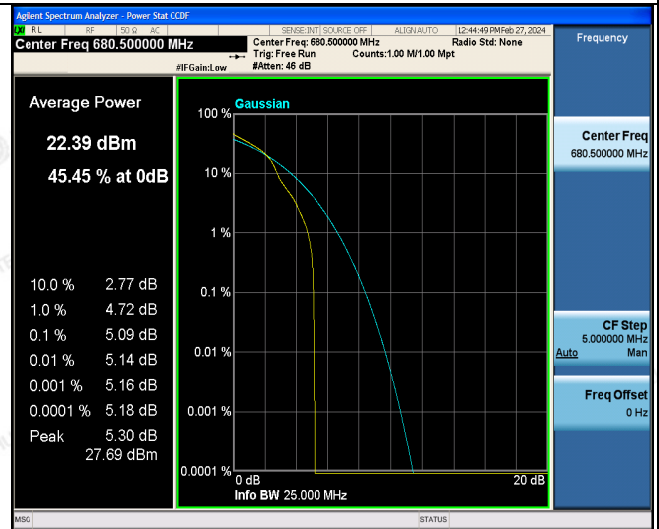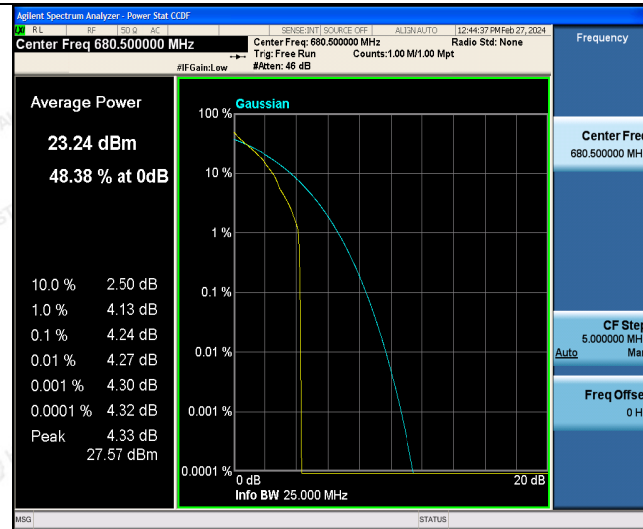

Middle Channel

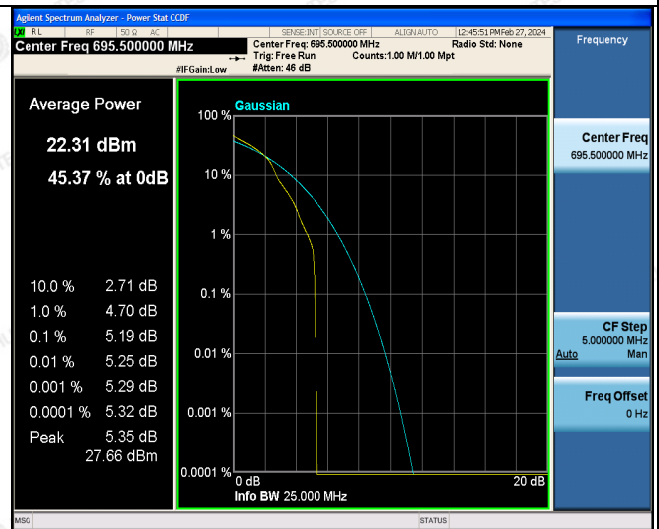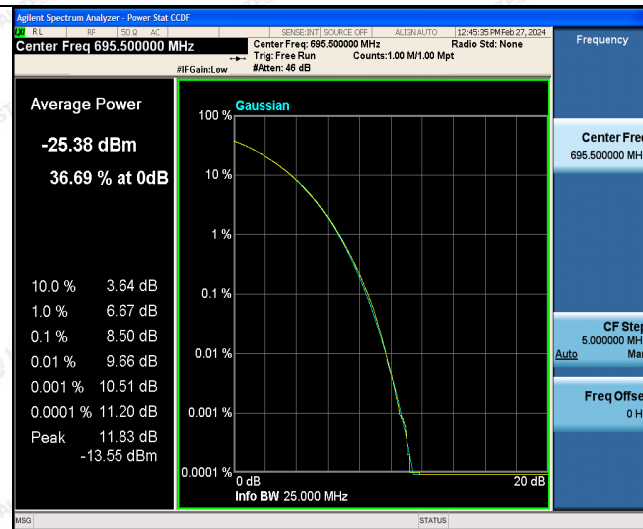


High Channel




LTE FDD Band 71-10MHz Channel Bandwidth PAPR


QPSK

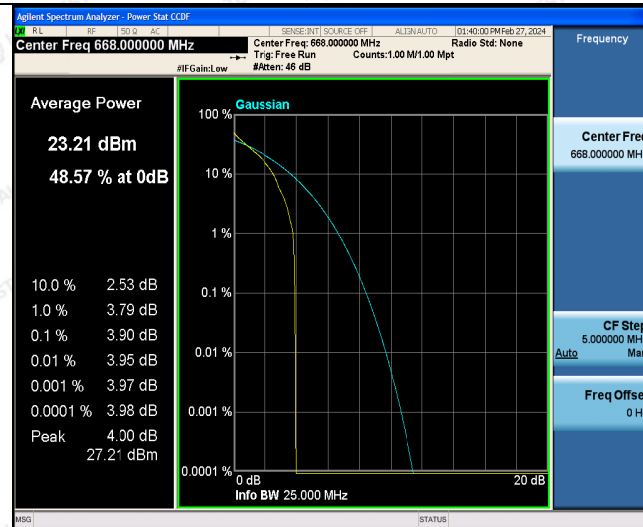



16QAM

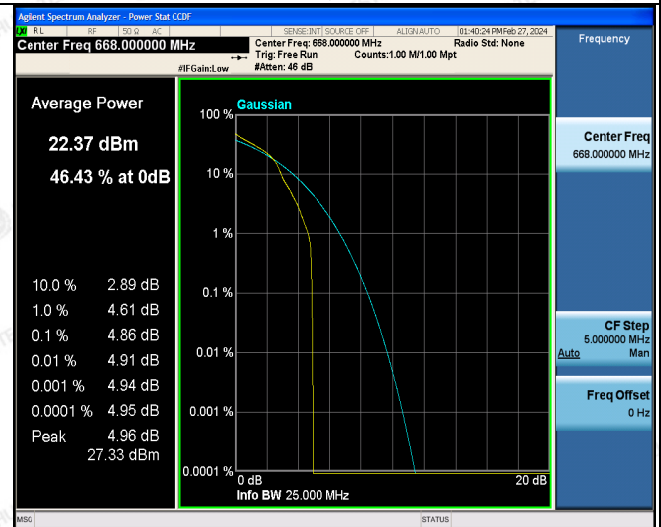

Low Channel

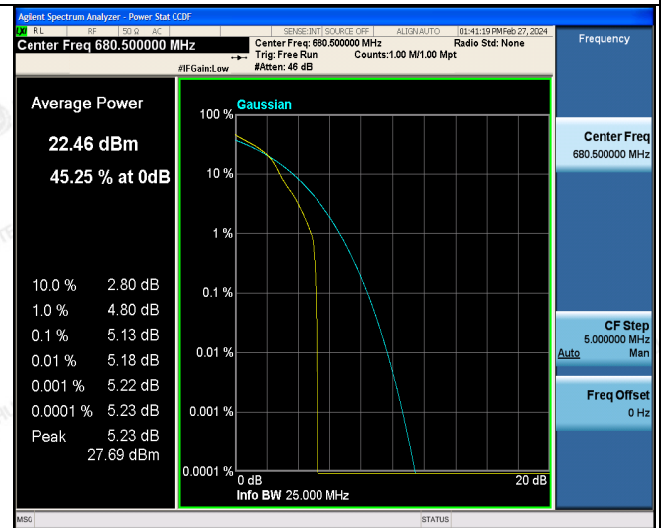

Middle Channel

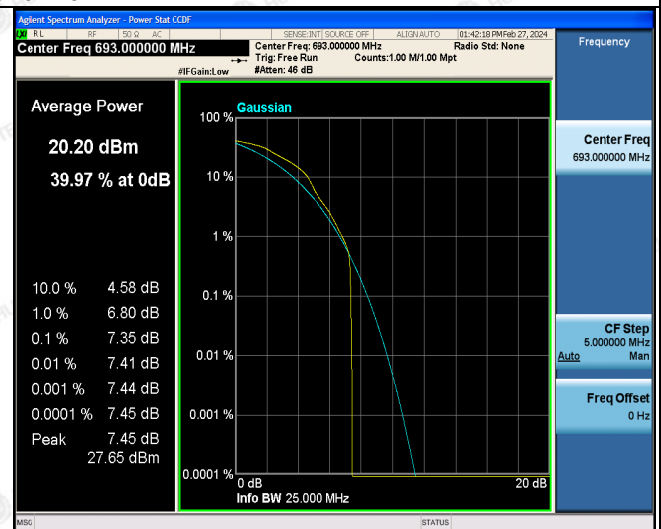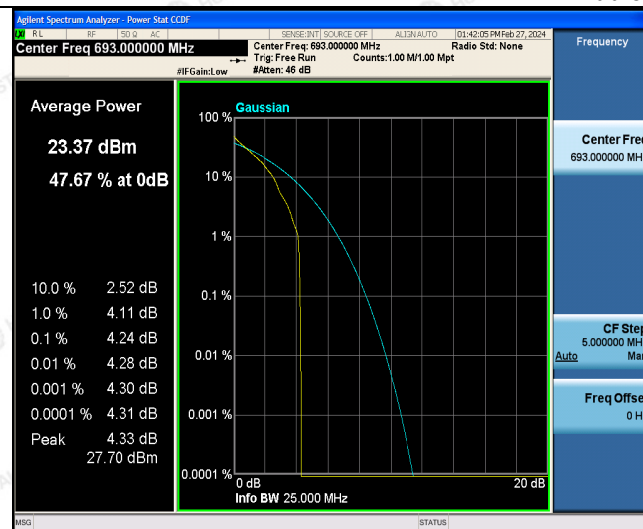

High Channel

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 71-15MHz Channel Bandwidth PAPR



QPSK

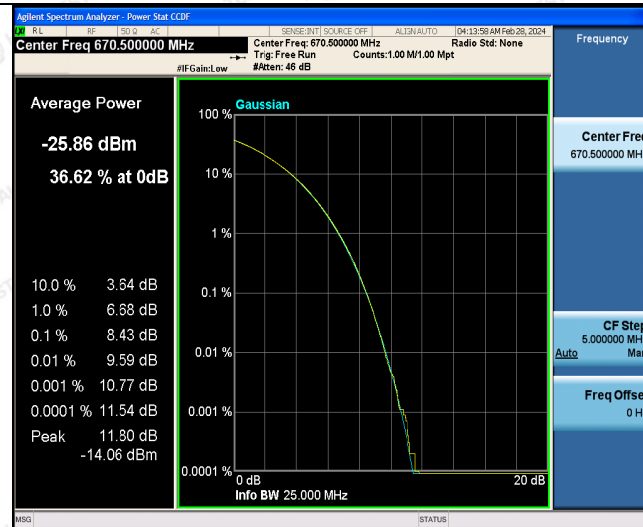



16QAM

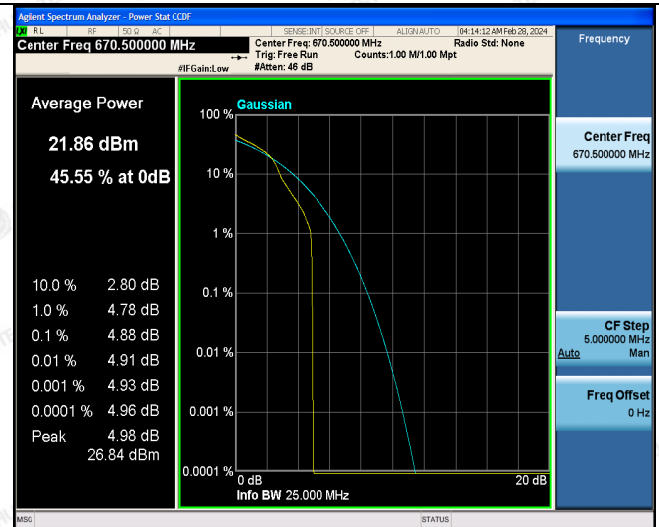

Low Channel

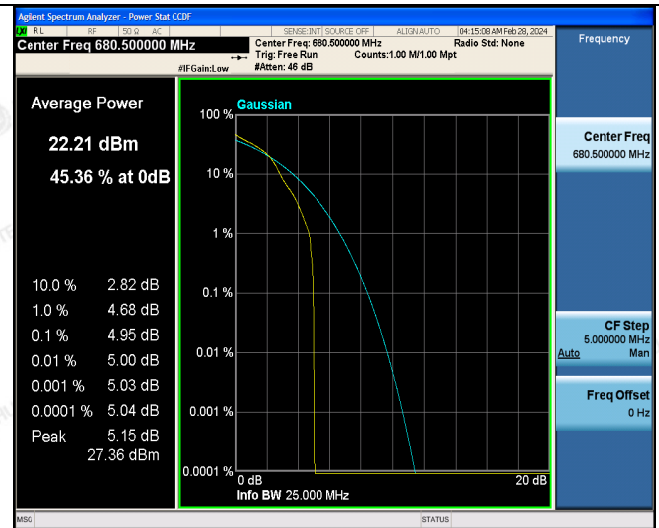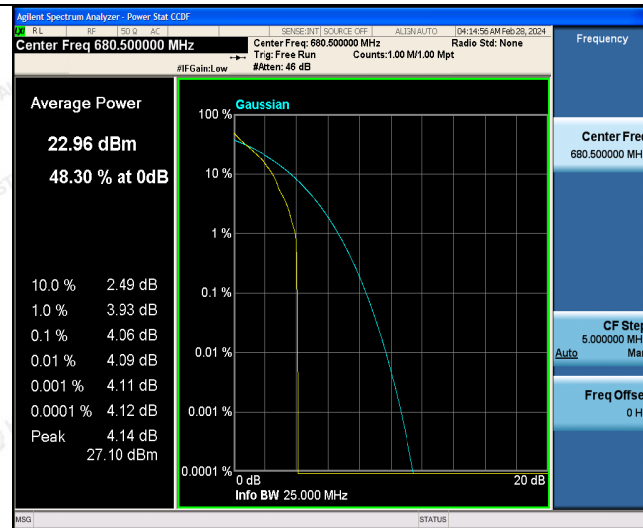

Middle Channel

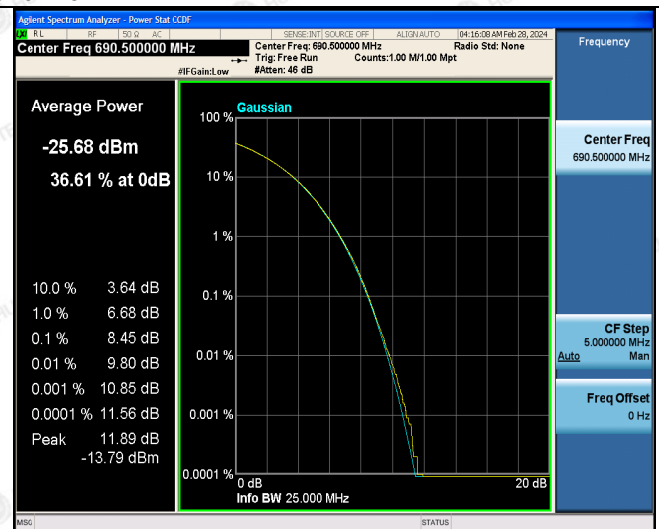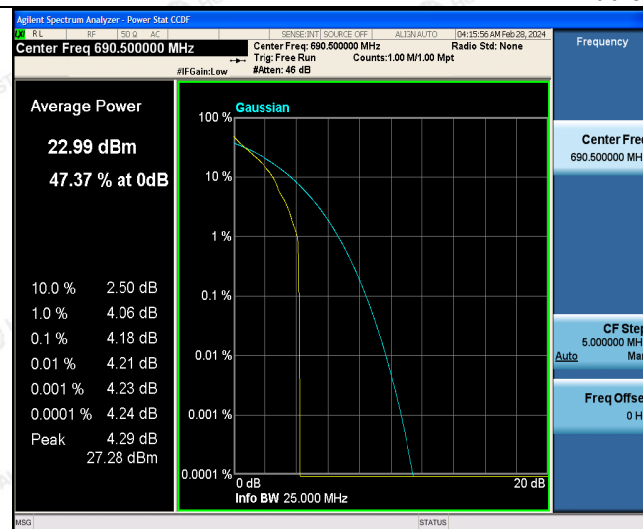

High Channel

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 71-20MHz Channel Bandwidth PAPR

QPSK

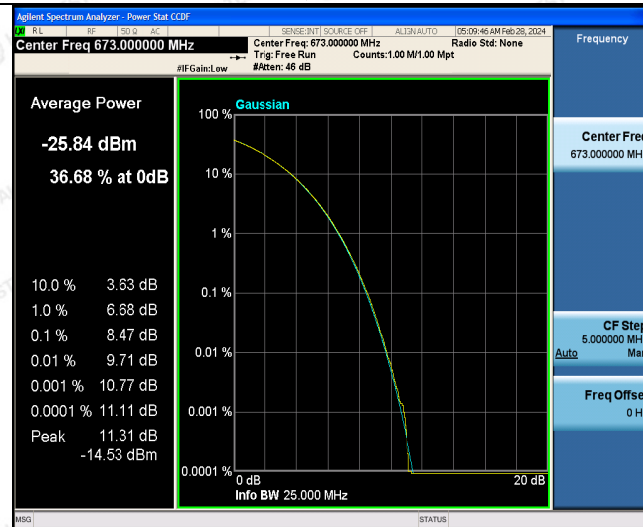


1RB#0

16QAM

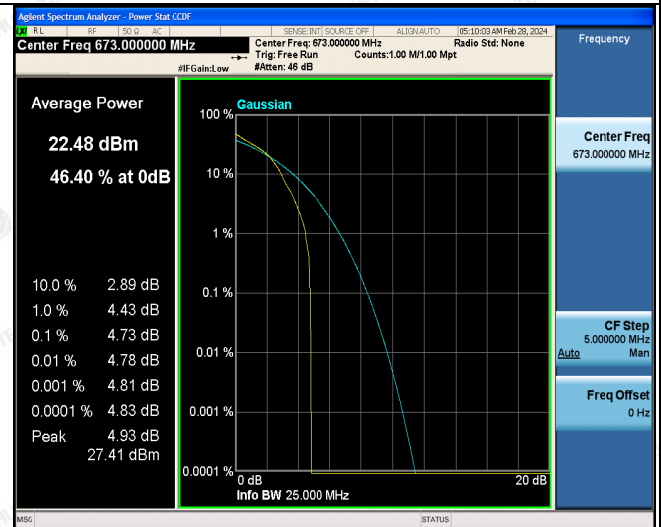


1RB#0

Low Channel

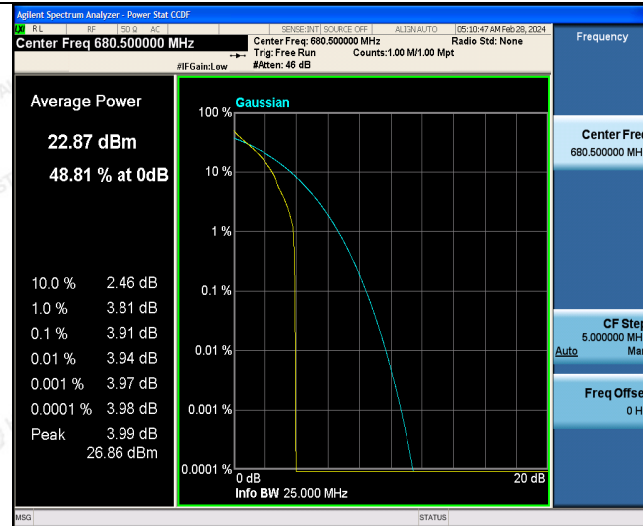


1RB#0

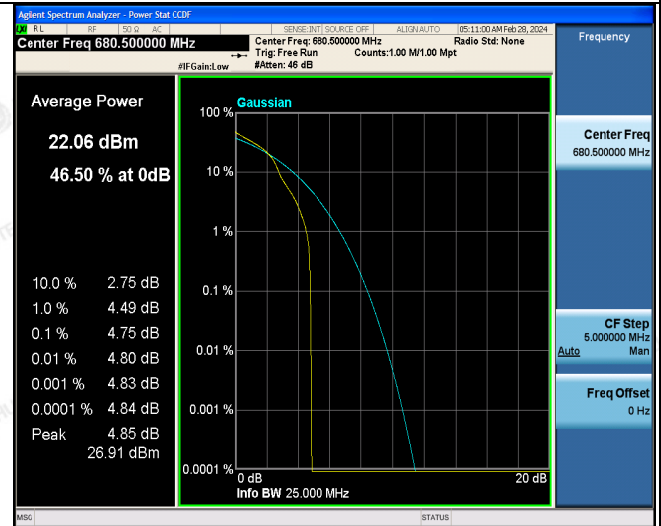


1RB#0

Middle Channel

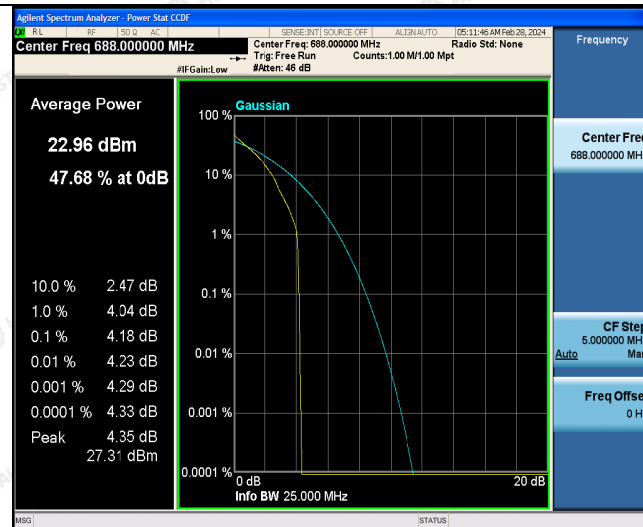

1RB#0

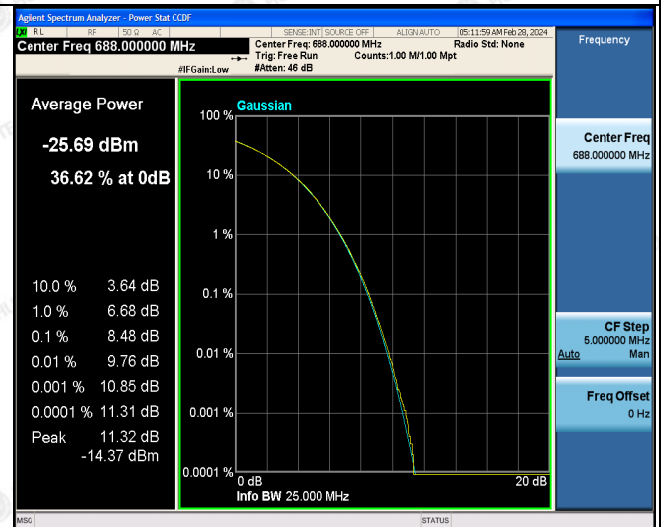

1RB#0

High Channel

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




3.4 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

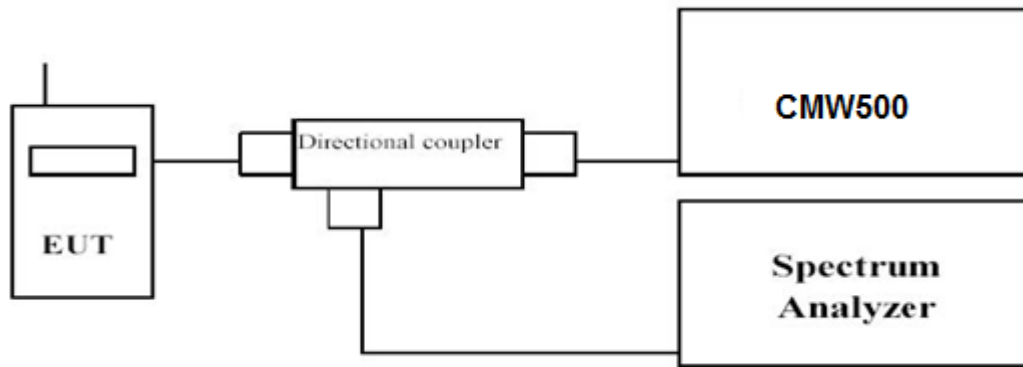

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW \geq 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 71; recorded worst case for each Channel Bandwidth of LTE FDD Band 71.

| LTE FDD Band 71 | | | | | | |
|----------------------|----------------|-----------------|---------------------------------|-------|------------------------------|--------|
| TX Channel Bandwidth | RB Size/Offset | Frequency (MHz) | -26dBc Emission bandwidth (MHz) | | 99% Occupied bandwidth (MHz) | |
| | | | QPSK | 16QAM | QPSK | 16QAM |
| 5MHz | 25RB#0 | 665.5 | 5.024 | 5.004 | 4.5060 | 4.5009 |
| | | 680.5 | 5.022 | 5.000 | 4.5099 | 4.5025 |
| | | 695.5 | 5.033 | 4.991 | 4.5122 | 4.5041 |
| 10MHz | 50RB#0 | 668 | 9.882 | 9.823 | 8.9556 | 8.9641 |
| | | 680.5 | 9.866 | 9.811 | 8.9597 | 8.9496 |
| | | 693 | 9.883 | 9.848 | 8.9694 | 8.9761 |
| 15MHz | 75RB#0 | 670.5 | 14.74 | 14.46 | 13.447 | 13.400 |
| | | 680.5 | 14.61 | 14.68 | 13.394 | 13.413 |
| | | 690.5 | 14.71 | 14.75 | 13.443 | 13.459 |
| 20MHz | 100RB#0 | 673 | 19.47 | 19.65 | 17.893 | 17.900 |
| | | 680.5 | 19.43 | 19.41 | 17.862 | 17.894 |
| | | 688 | 19.46 | 19.45 | 17.891 | 17.919 |



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 71-10MHz Channel Bandwidth

QPSK



16QAM

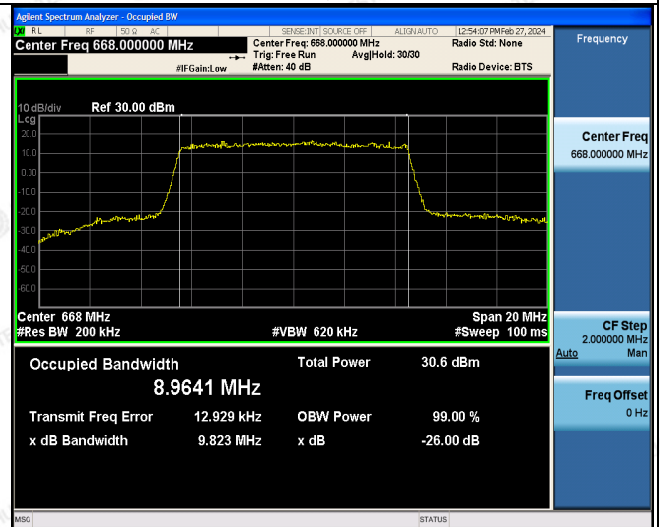


50RB#0

50RB#0

Low Channel




50RB#0

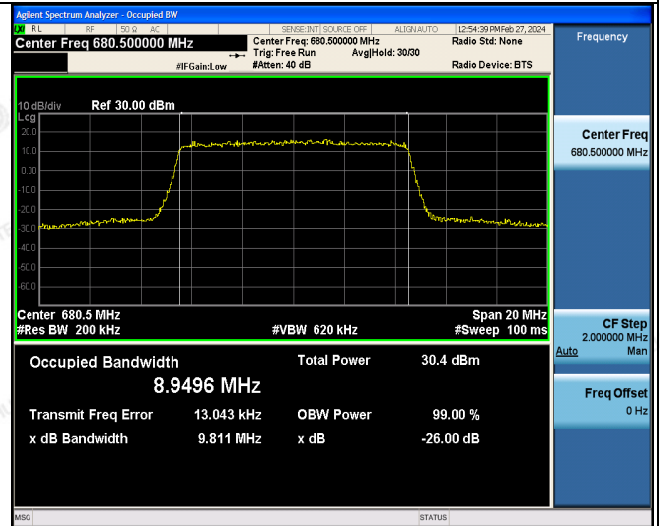


50RB#0

Middle Channel

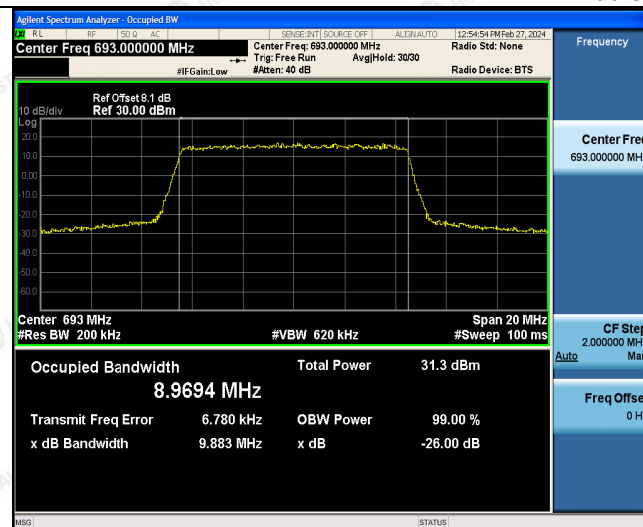

50RB#0

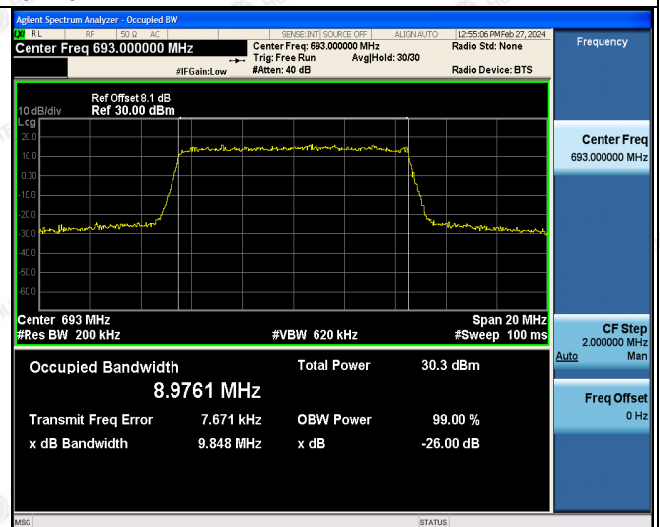

50RB#0

High Channel

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 71-15MHz Channel Bandwidth

QPSK

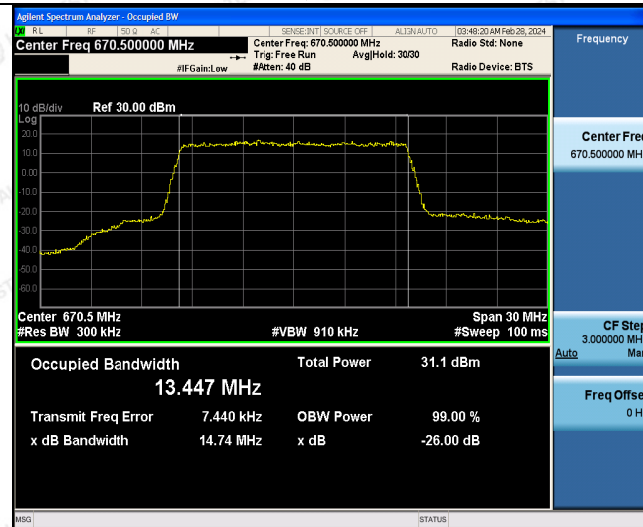

75RB#0

16QAM

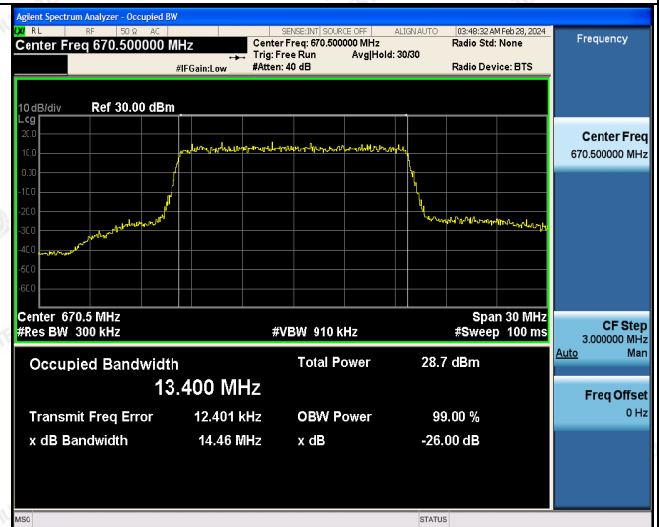


75RB#0

Low Channel




75RB#0

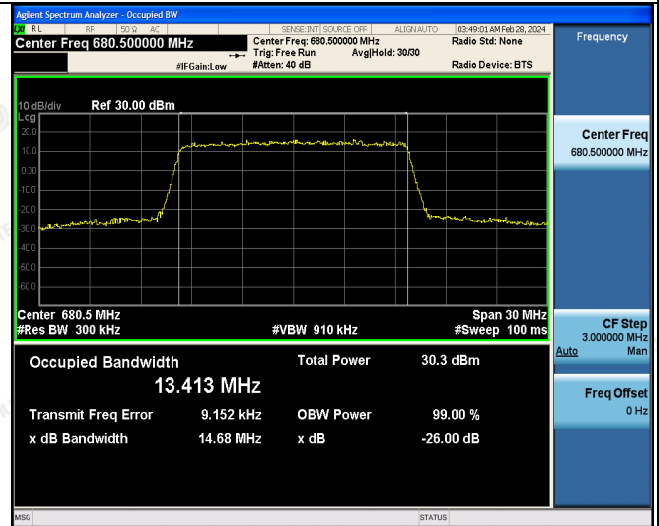


75RB#0

Middle Channel

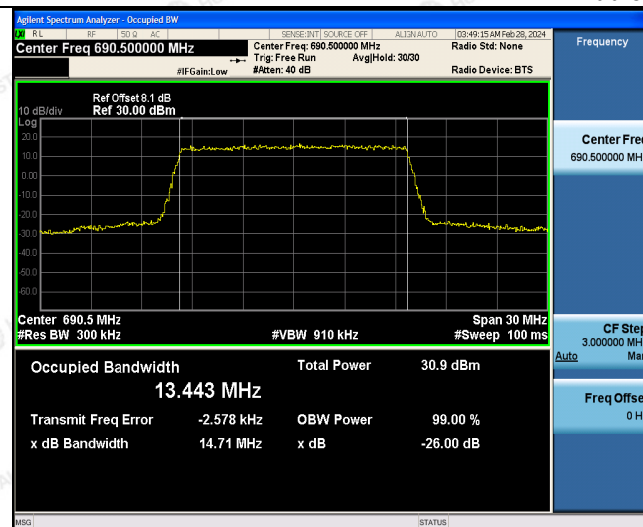


75RB#0

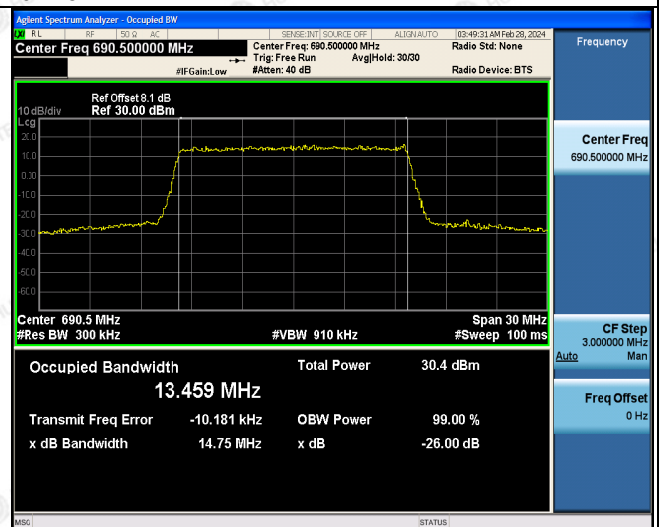

75RB#0

High Channel

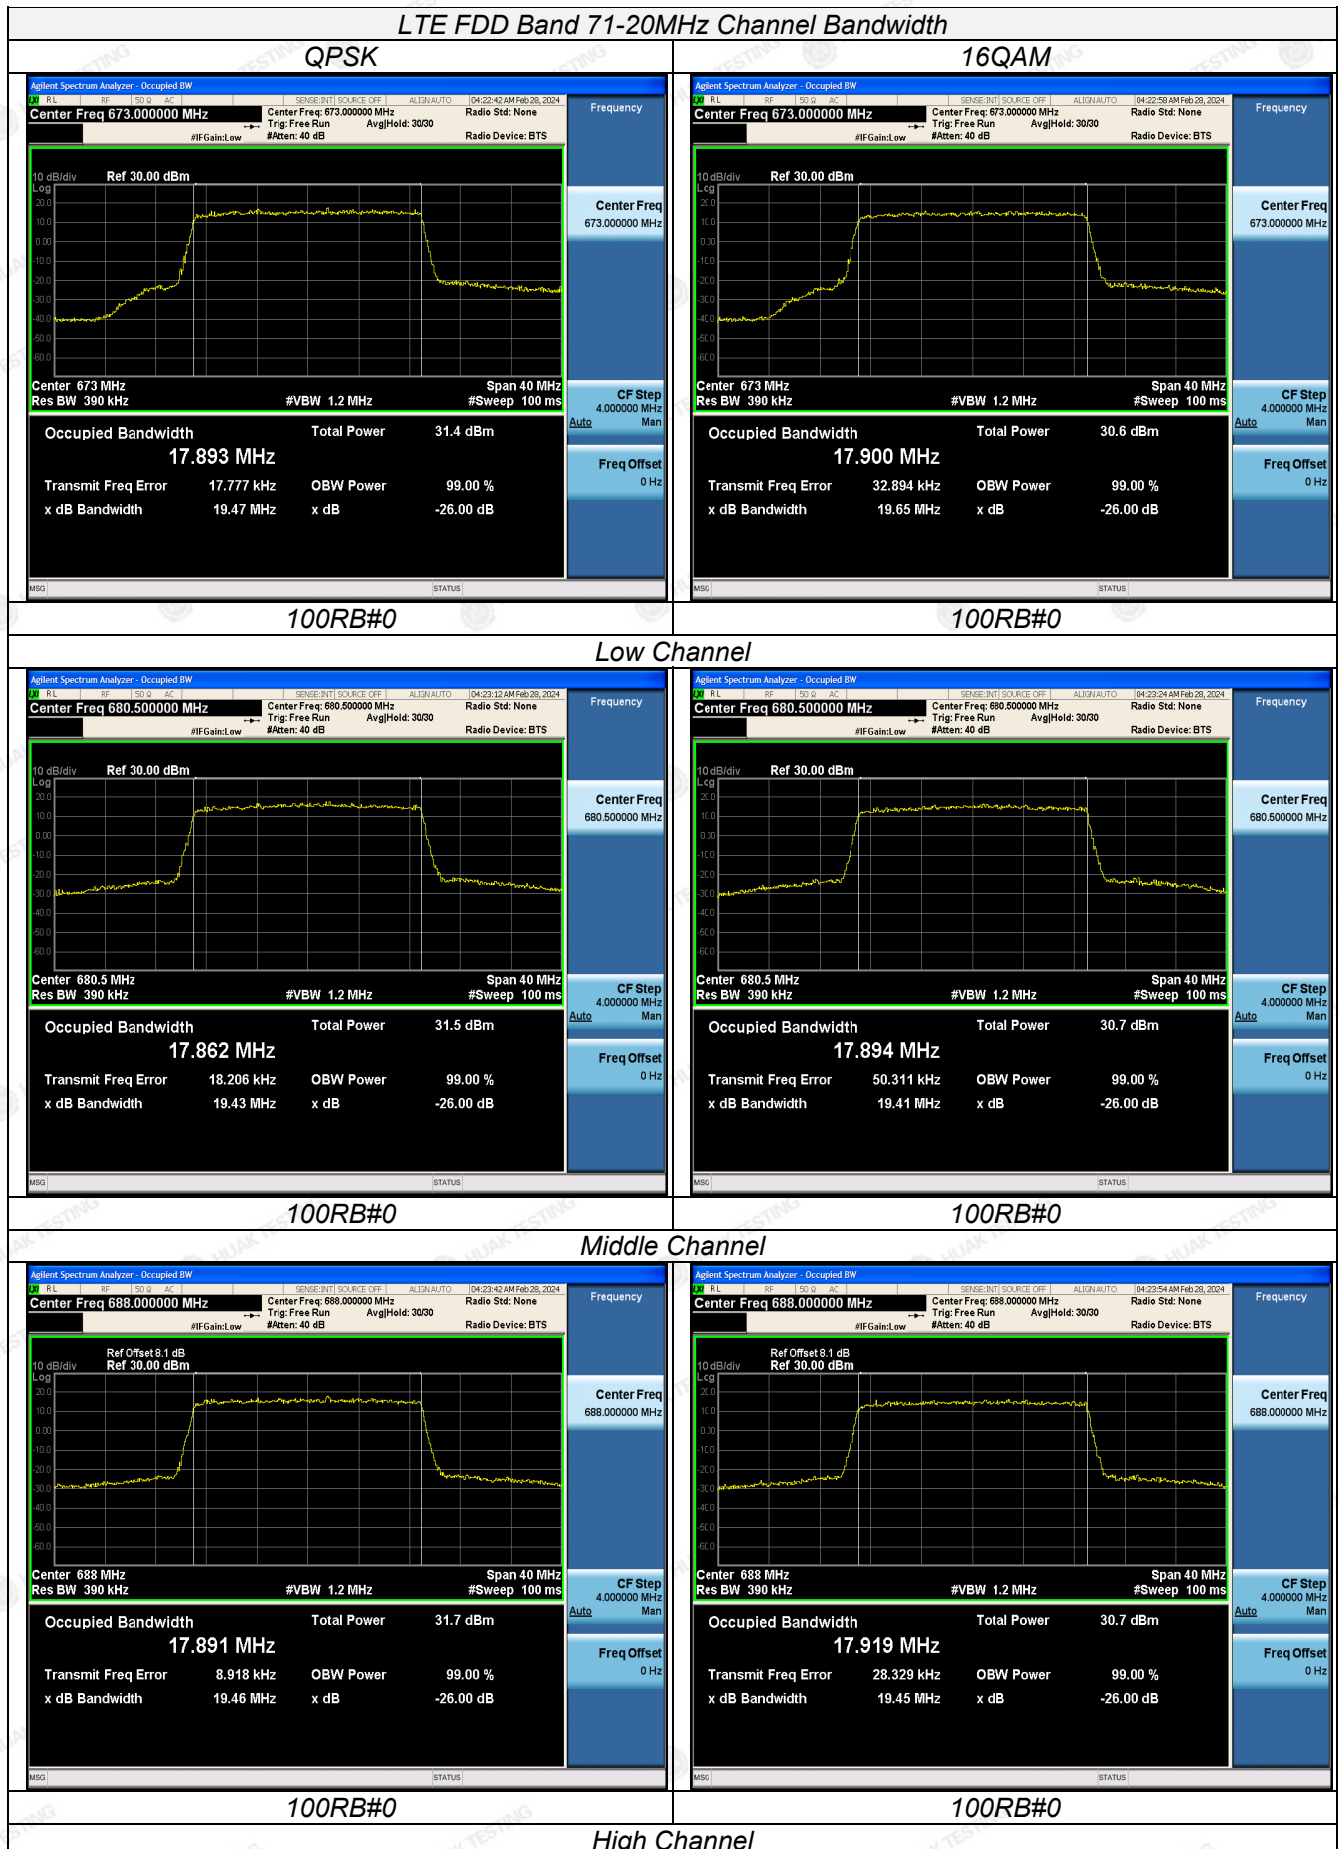

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




3.5 Band Edge compliance

LIMIT

that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST CONFIGURATION

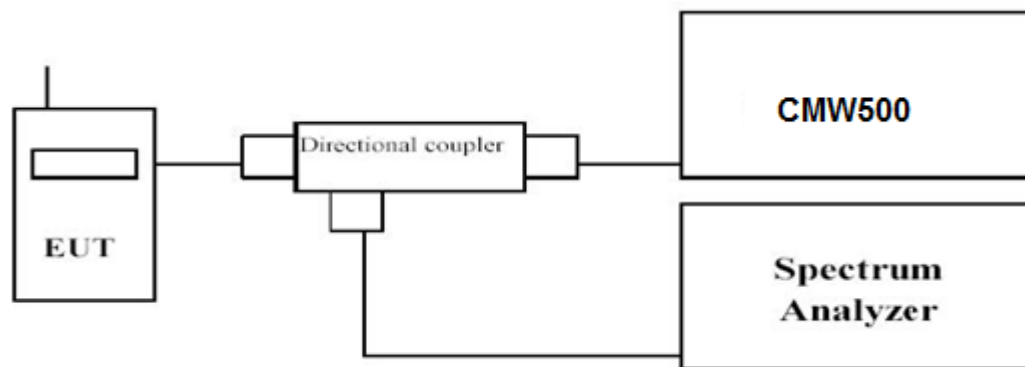

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

TEST RESULTS


Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 71; recorded worst case for each Channel Bandwidth of LTE FDD Band 71.




LTE FDD Band 71-5MHz Channel Bandwidth Band Edge Compliance

QPSK

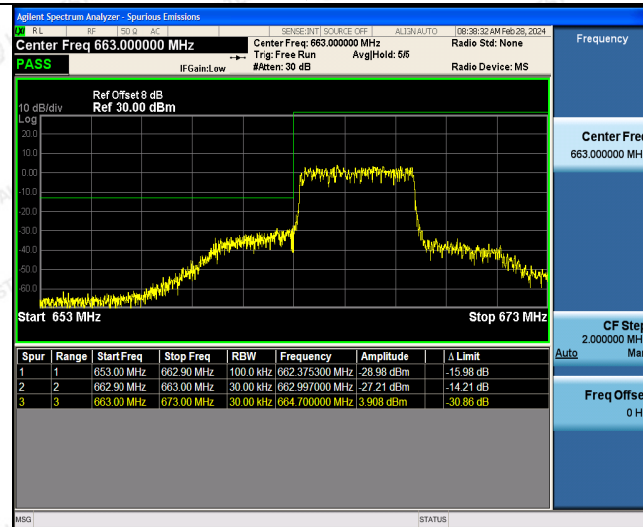


25RB#0

16QAM

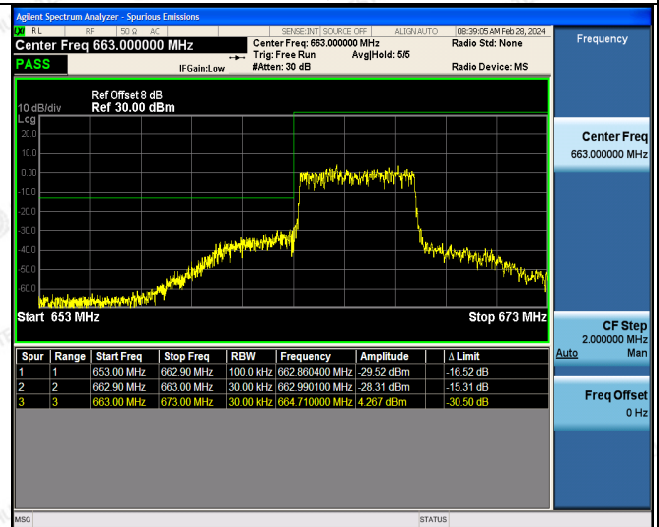


25RB#0

Low Channel

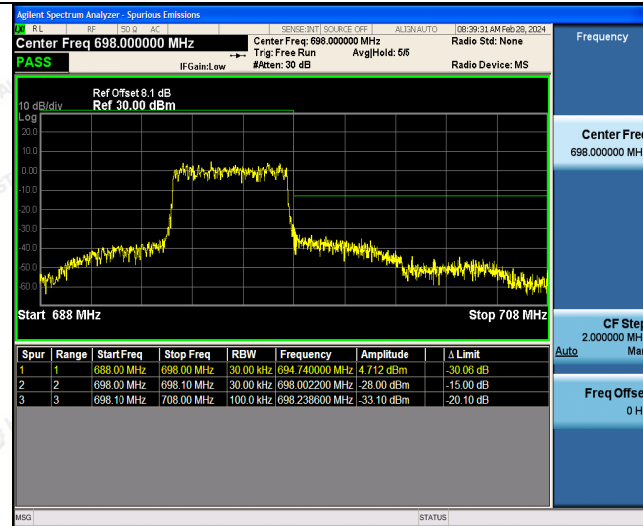

25RB#0

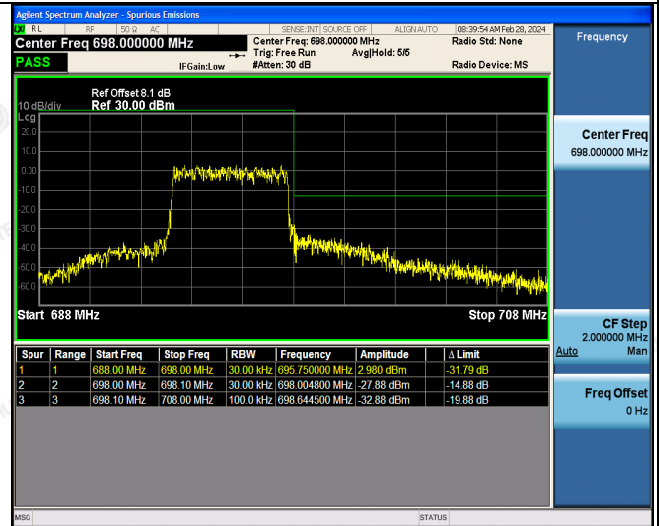


25RB#0




LTE FDD Band 71-10MHz Channel Bandwidth Band Edge Compliance

QPSK

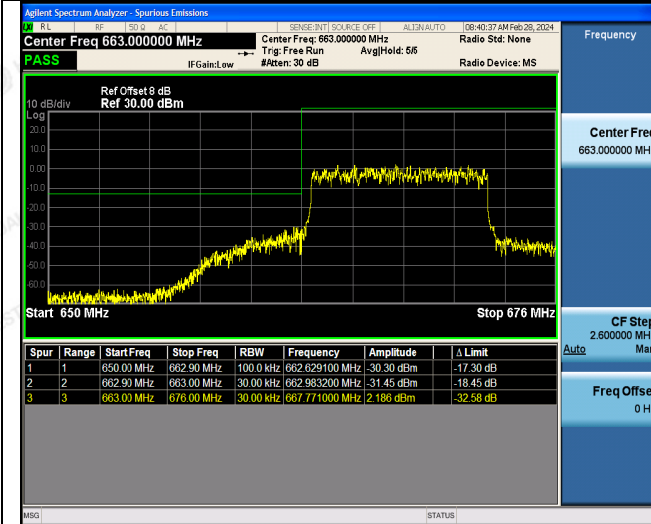


50RB#0

16QAM

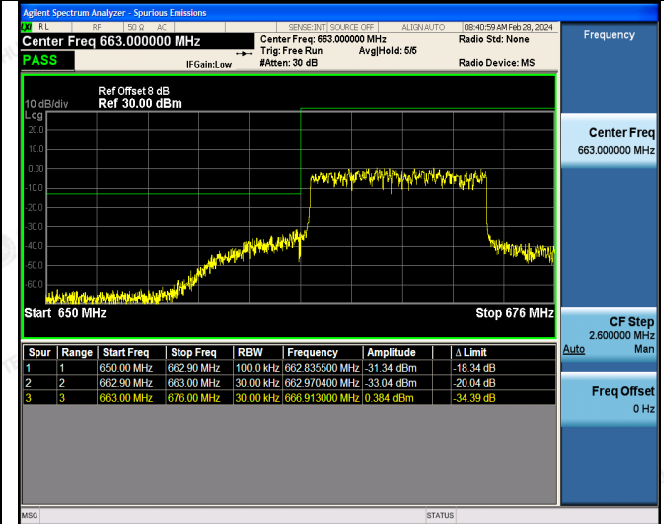


50RB#0

Low Channel

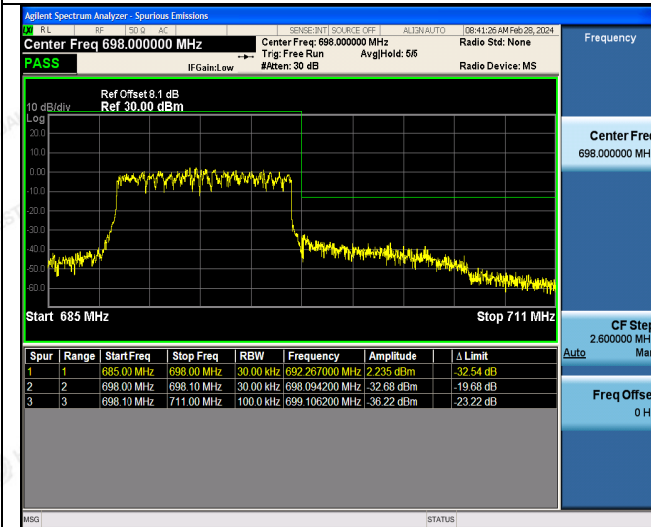

50RB#0

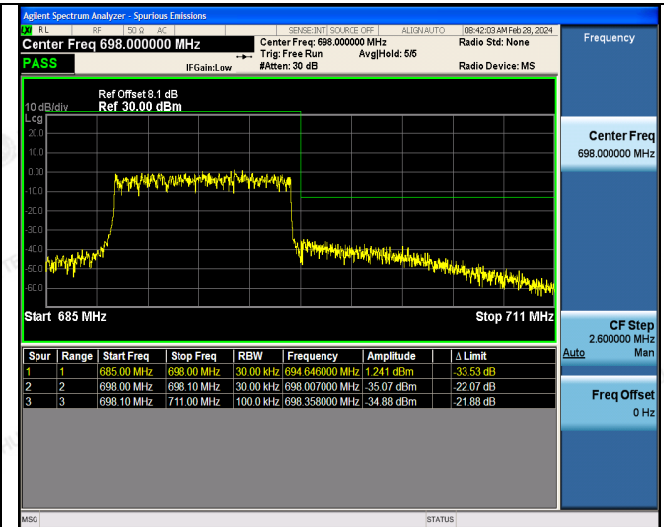


50RB#0

High Channel




LTE FDD Band 71-15MHz Channel Bandwidth Band Edge Compliance

QPSK

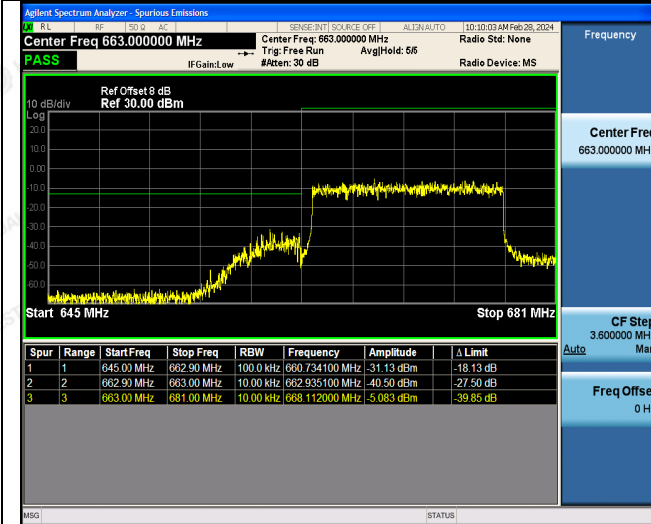


75RB#0

16QAM

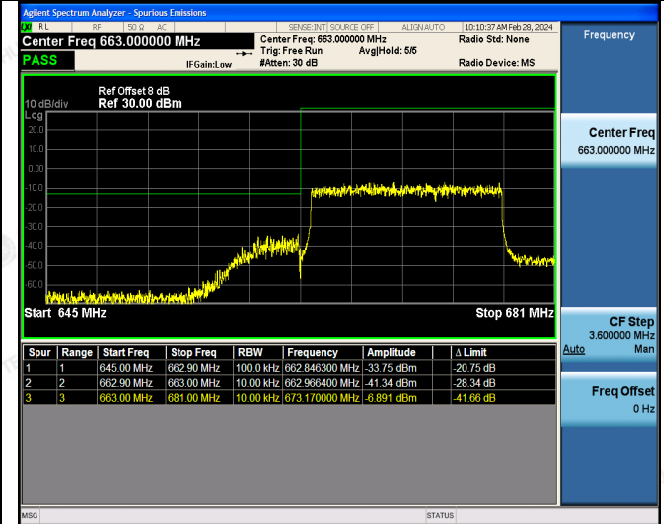


75RB#0

Low Channel

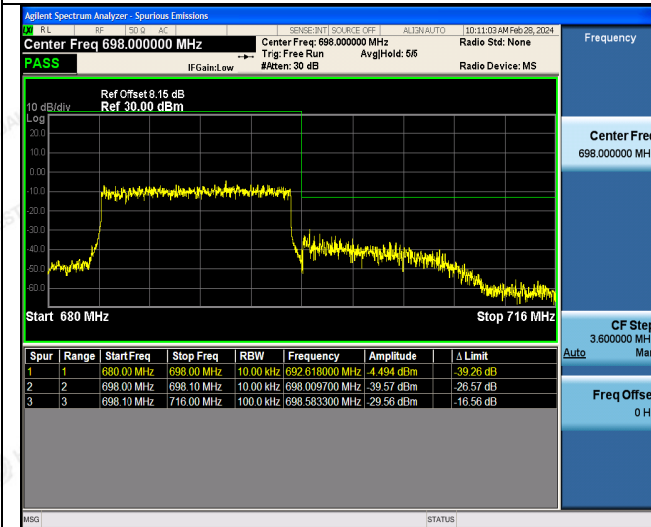

75RB#0

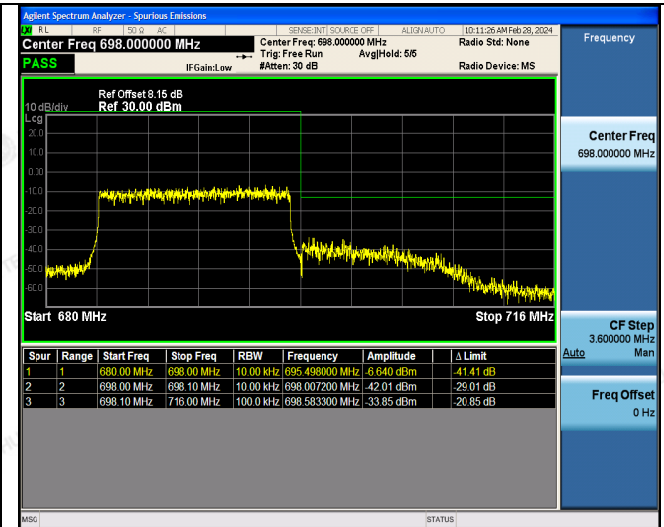


75RB#0




LTE FDD Band 71-20MHz Channel Bandwidth Band Edge Compliance

QPSK

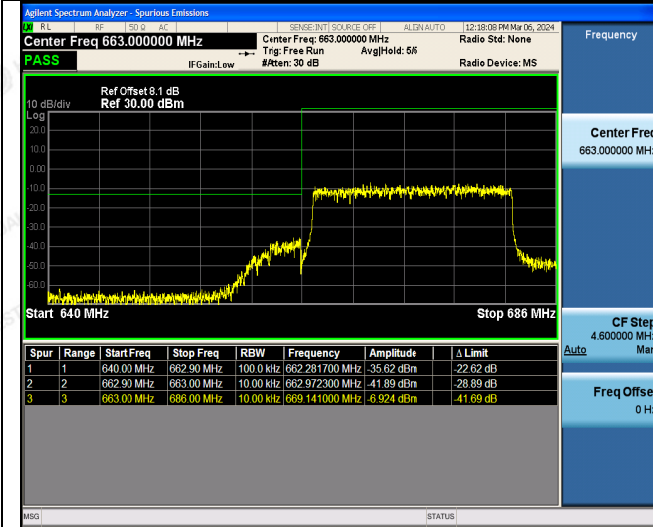



16QAM

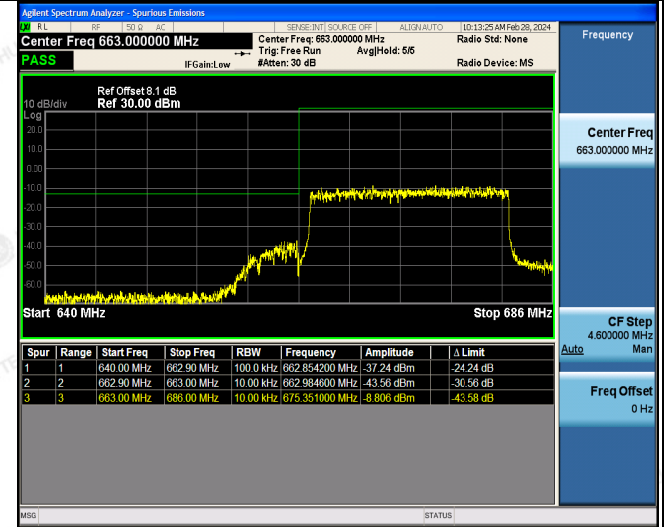

100RB#0

100RB#0

Low Channel

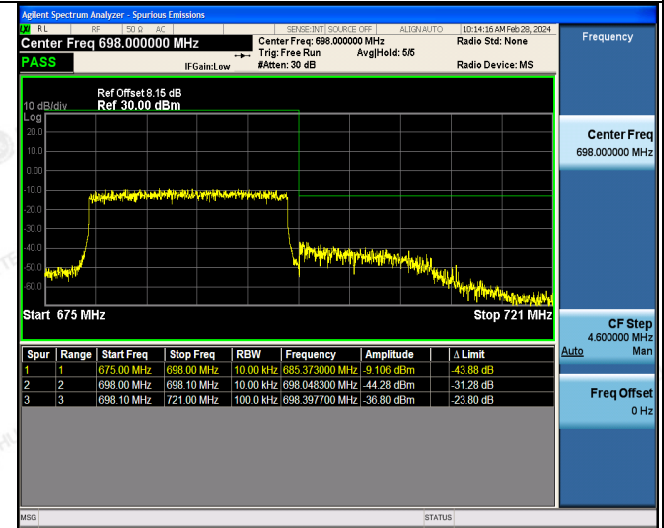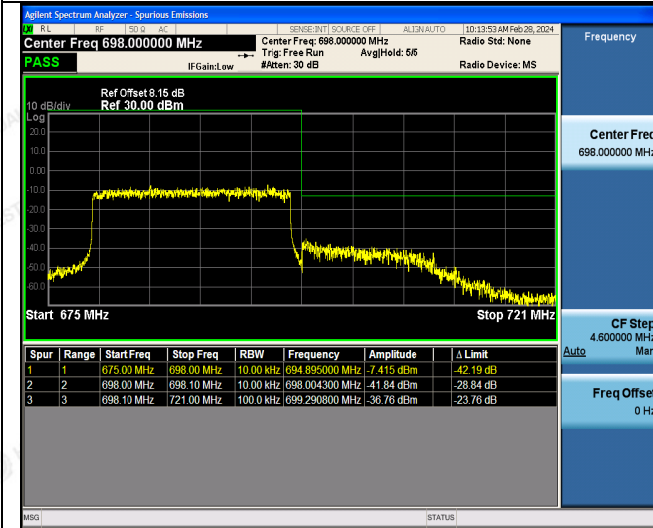

1RB#0

1RB#0

High Channel



3.6 Spurious Emission


LIMIT

that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST CONFIGURATION

Conducted Spurious Measurement:

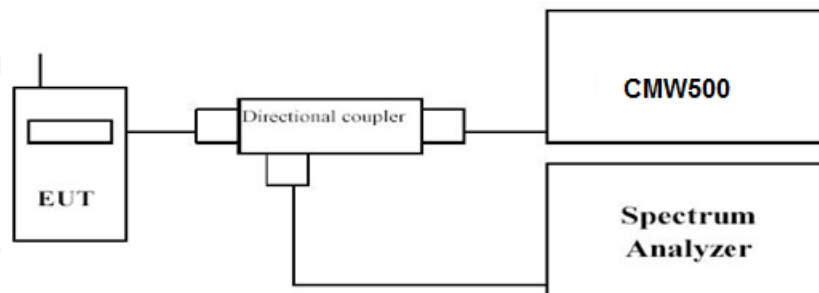

Radiated Spurious Measurement:

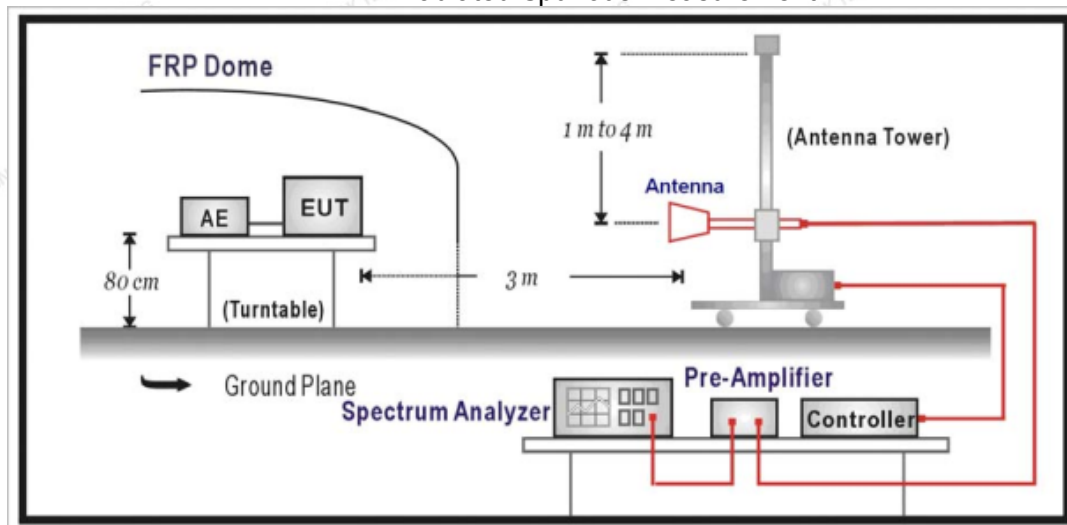

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Conducted Spurious Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10^{th} harmonic.
- Please refer to following tables for test antenna conducted emissions.



g.

| Working Frequency | Sub range (GHz) | RBW | VBW | Sweep time (s) |
|-------------------|-----------------|-------|-------|----------------|
| LTE FDD Band 71 | 0.03~26.5 | 1 MHz | 10MHz | Auto |

Radiated Spurious Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The maximum signal level detected by the measuring receiver shall be noted.
- The transmitter shall be replaced by a substitution antenna.
- The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- The substitution antenna shall be connected to a calibrated signal generator.
- If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- Test site anechoic chamber refer to ANSI C63.

TEST RESULTS**Remark:**


- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 71; recorded worst case for each Channel Bandwidth of LTE FDD Band 71.

Conducted Measurement:




LTE FDD Band 71-5MHz Channel Bandwidth Low Channel

QPSK

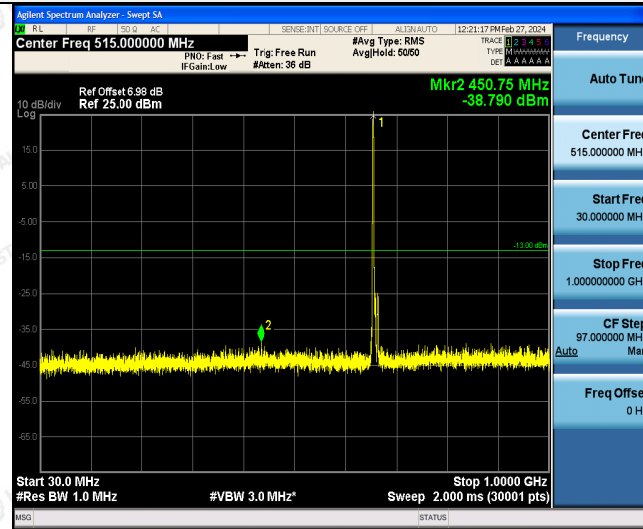

16QAM

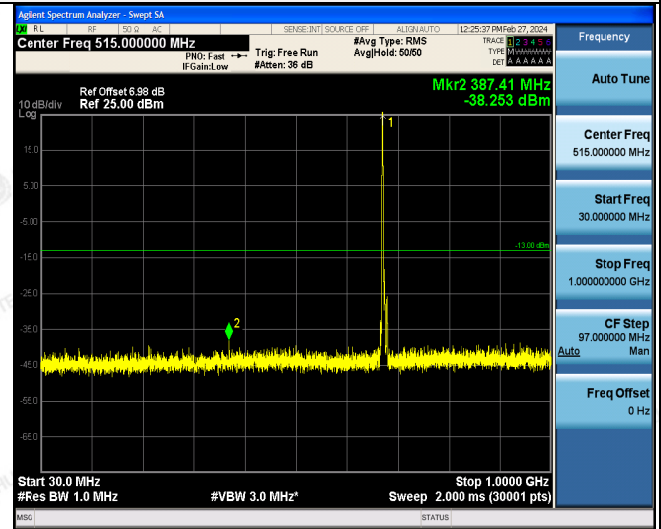

30MHz~1GHz




30MHz~1GHz



1GHz~5GHz



1GHz~5GHz

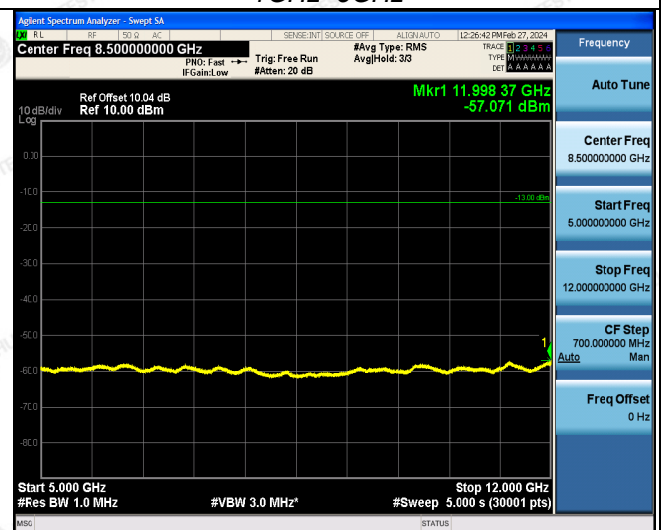

5GHz~12GHz

5GHz~12GHz

