

Appendix B

Detailed Test Results

GSM850 for Body
GSM1900 for Body
WCDMA Band II for Body
WCDMA Band IV for Body
WCDMA Band V for Body
LTE Band 7 for Body
LTE Band 12 for Body
LTE Band 13 for Body
LTE Band 14 for Body
LTE Band 25 for Body
LTE Band 26 for Body
LTE Band 30 for Body
LTE Band 41 for Body
LTE Band 66 for Body
LTE Band 71 for Body
WIFI 2.4G for Body
WIFI 5G for Body
BT for Body

Test Laboratory: SGS-SAR Lab

TB330XU GSM850 GPRS 4TS 190CH Back side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.0797

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 42.837$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.35, 10.35, 10.35); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.721 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.915 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.984 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.714 W/kg

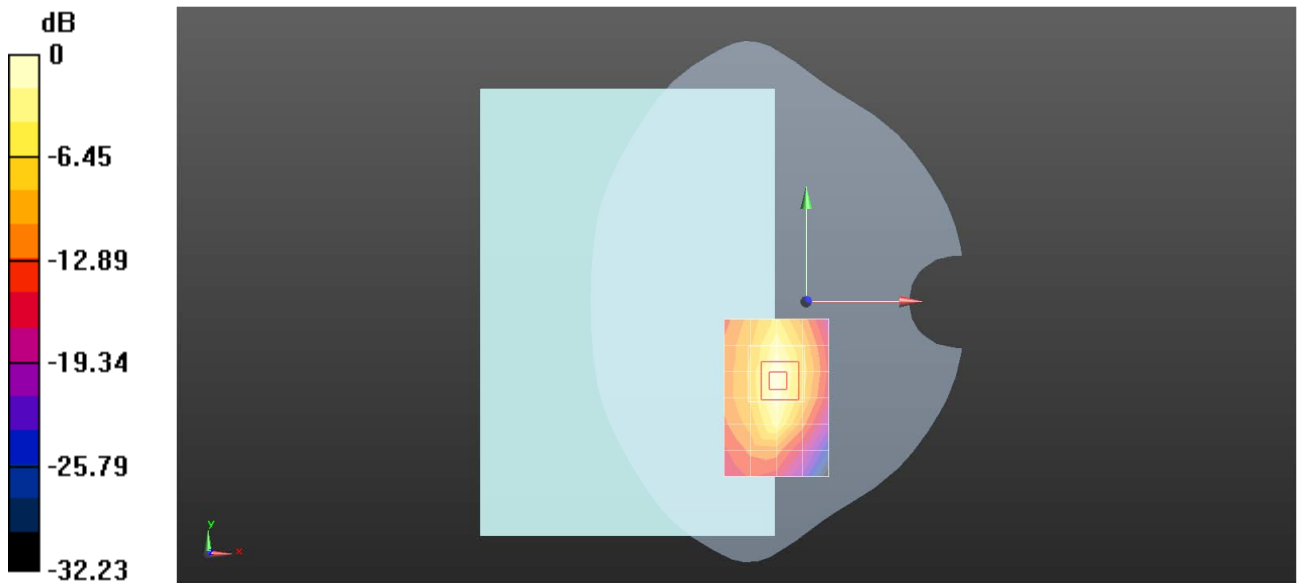

0 dB = 0.721 W/kg = -1.42 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU GSM1900 GPRS 4TS 810CH Left side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium: HSL1900; Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.407$ S/m; $\epsilon_r = 38.696$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.41, 8.41, 8.41); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.581 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.187 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.392 W/kg

Maximum value of SAR (measured) = 1.54 W/kg

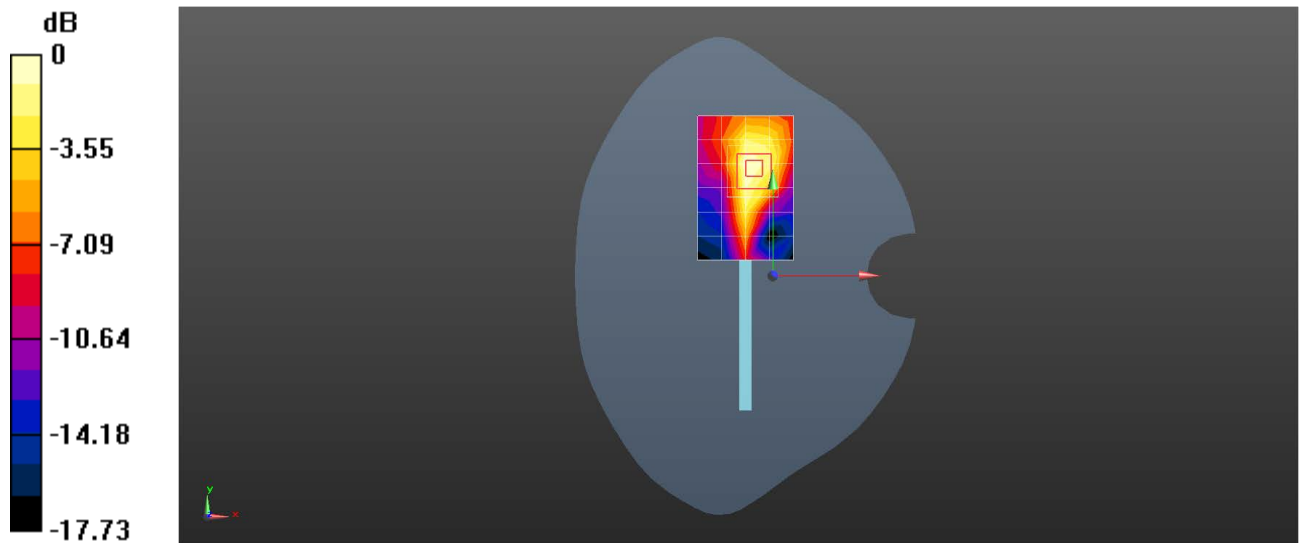

0 dB = 0.581 W/kg = -2.36 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU WCDMA Band II RMC 9400CH Top side 24mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 38.842$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.41, 8.41, 8.41); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.728 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.849 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.537 W/kg; SAR(10 g) = 0.324 W/kg

Maximum value of SAR (measured) = 0.751 W/kg

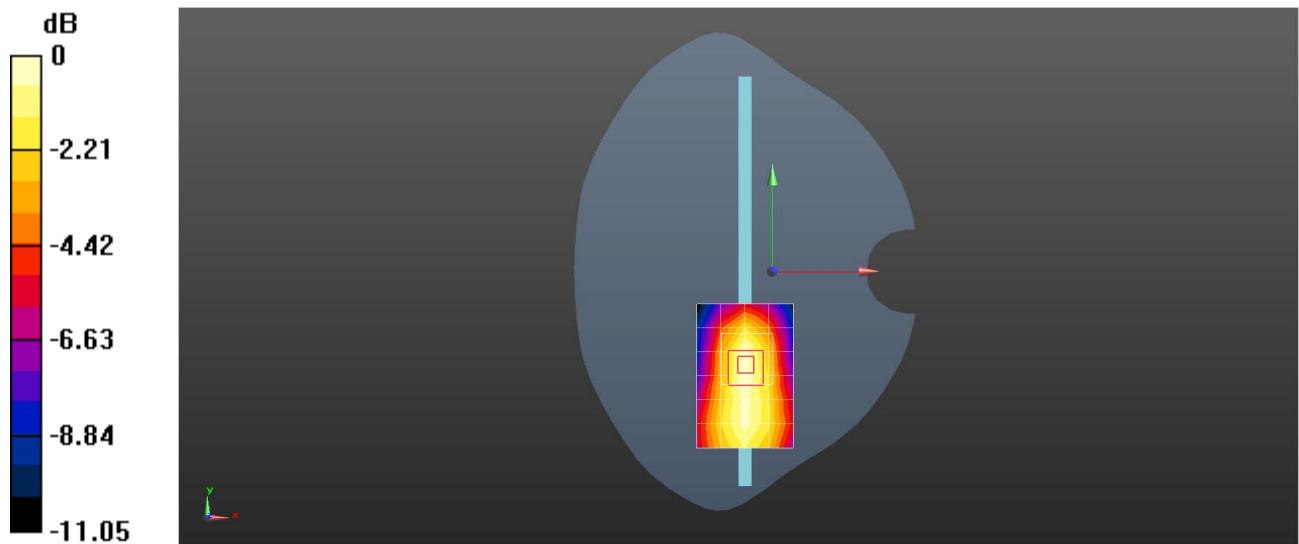

0 dB = 0.728 W/kg = -1.38 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU WCDMA Band IV RMC 1412CH Left side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 40.404$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.75, 8.75, 8.75); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.980 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.610 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.540 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.995 W/kg

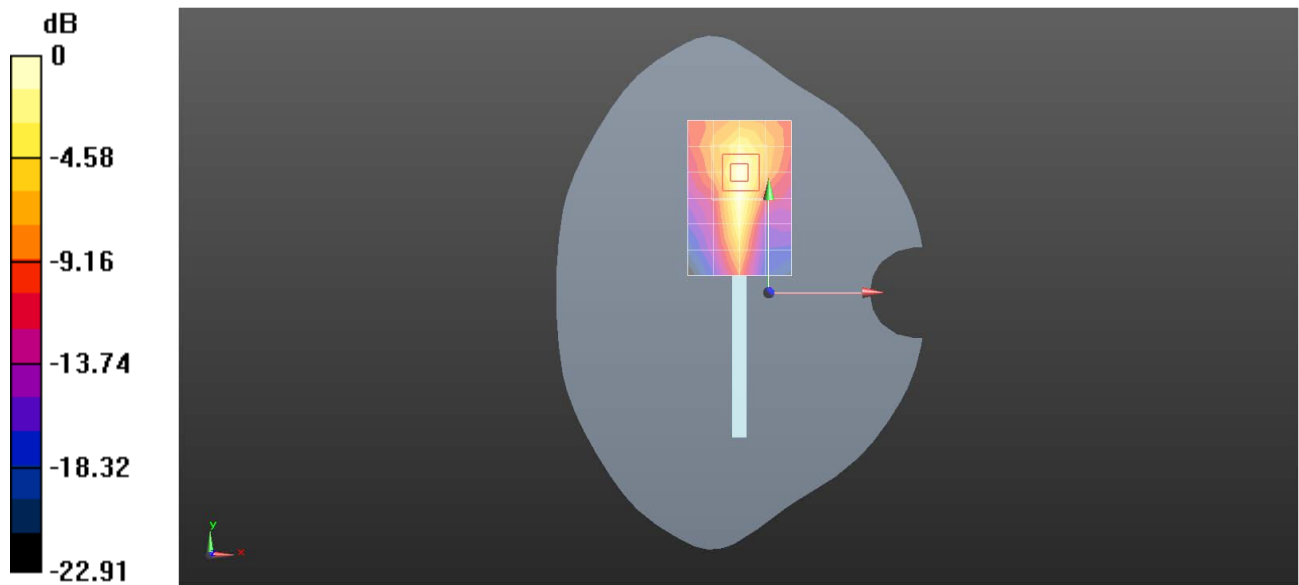

0 dB = 0.980 W/kg = -0.09 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU WCDMA Band V RMC 4182CH Back side 24mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.851$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.35, 10.35, 10.35); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.418 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.79 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.485 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 0.418 W/kg

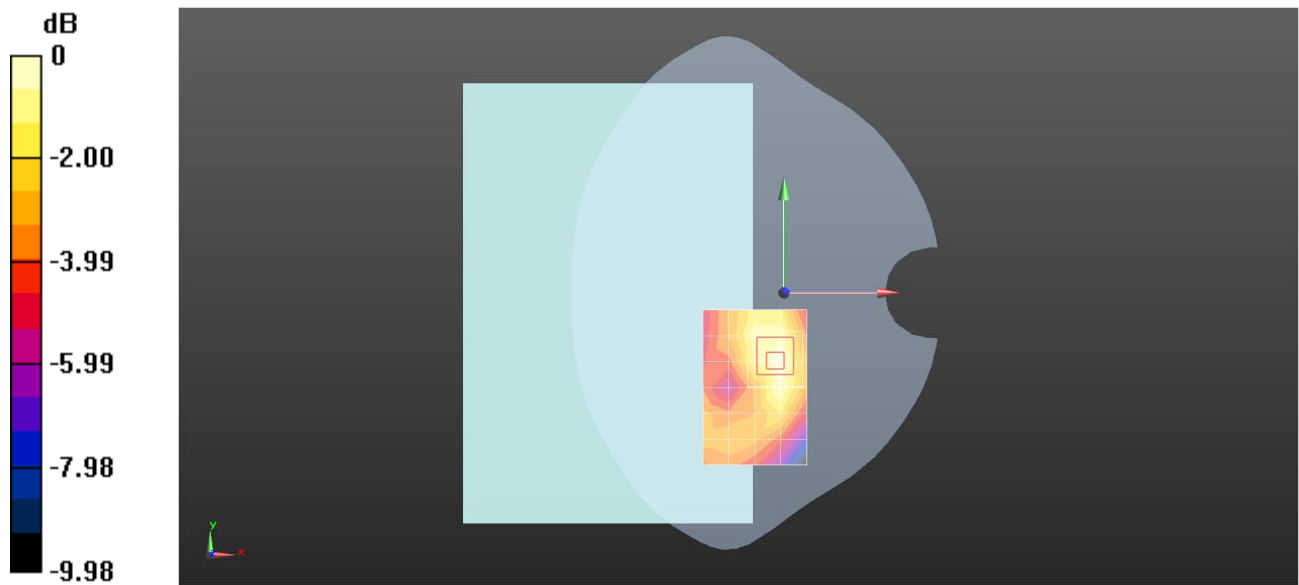

0 dB = 0.418 W/kg = -3.79 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU LTE Band 7 20M QPSK 1RB50 20850CH Back side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.884$ S/m; $\epsilon_r = 38.245$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.684 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.598 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.842 W/kg

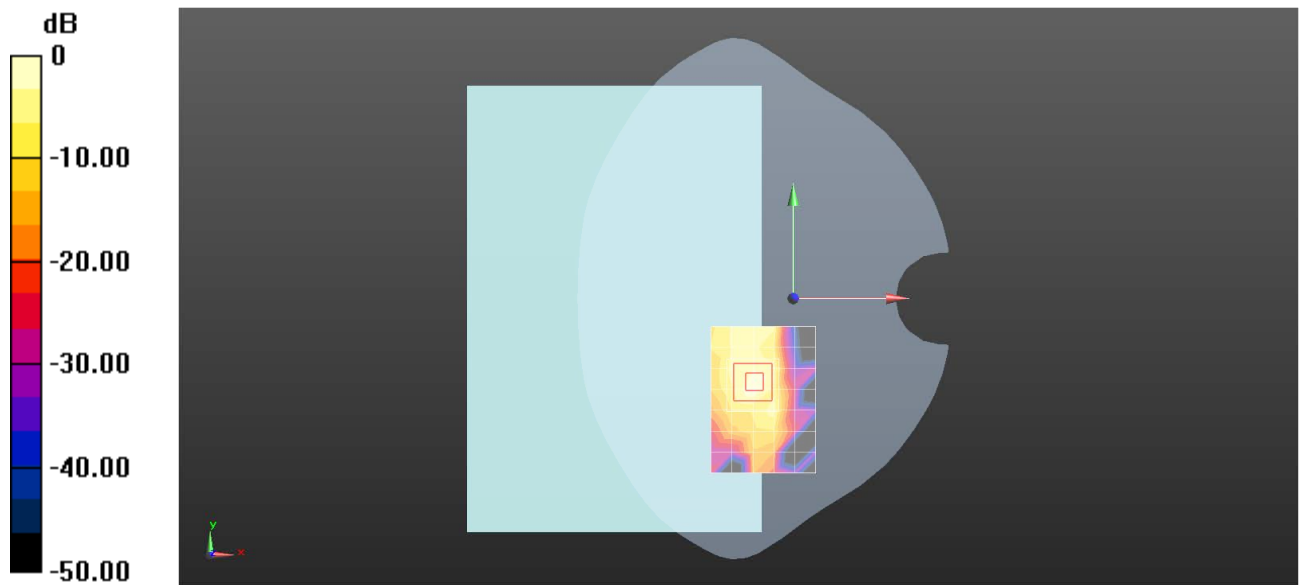

0 dB = 0.684 W/kg = -1.65 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU LTE Band 12 10M QPSK 25RB25 23060CH Back side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.865 \text{ S/m}$; $\epsilon_r = 41.564$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.75, 10.75, 10.75); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.726 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.71 V/m ; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.335 W/kg ; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.729 W/kg

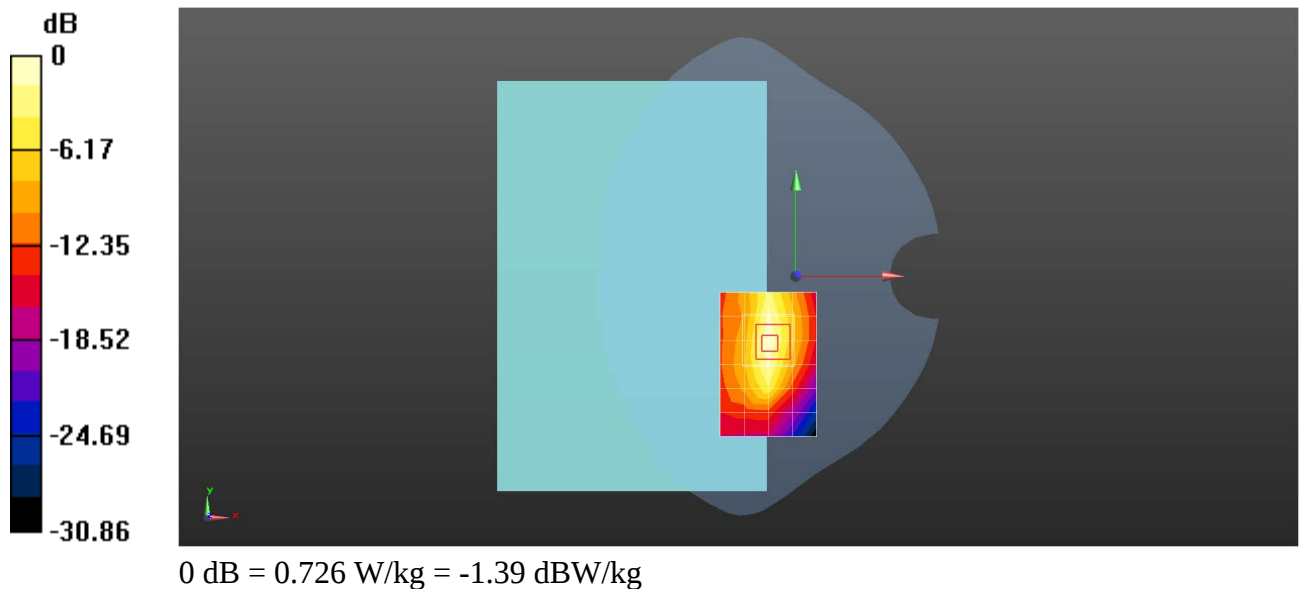

Test Laboratory: SGS-SAR Lab

TB330XU LTE Band 13 10M QPSK 1RB25 23230CH Back side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.857 \text{ S/m}$; $\epsilon_r = 42.282$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.75, 10.75, 10.75); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.607 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.821 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.869 W/kg

SAR(1 g) = 0.314 W/kg ; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 0.649 W/kg

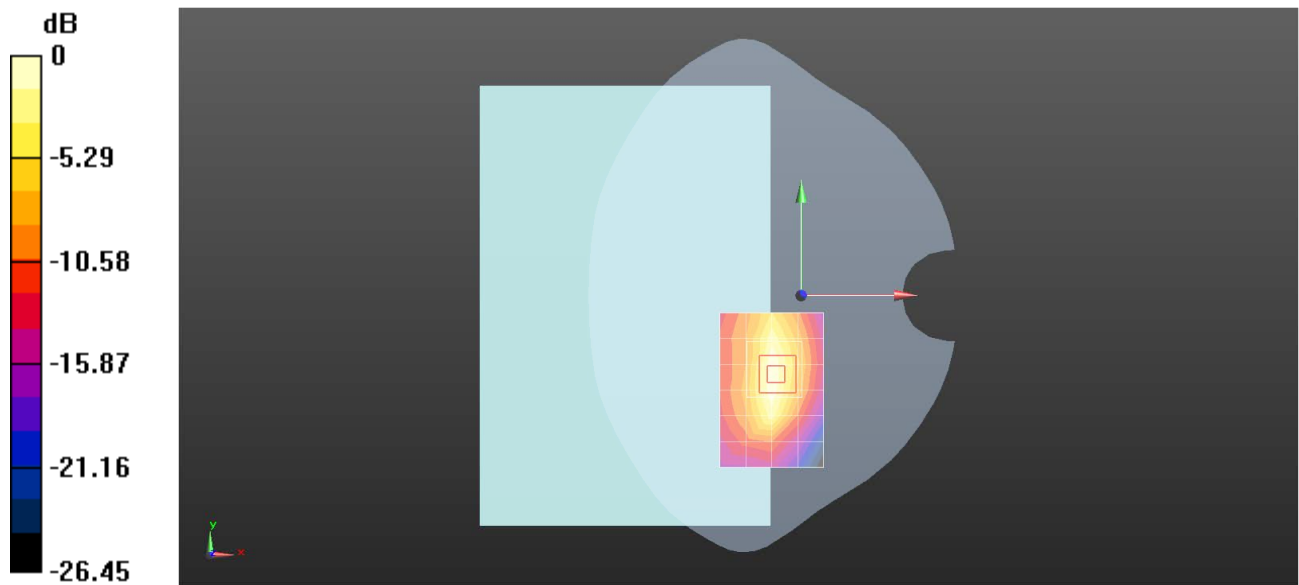

0 dB = 0.607 W/kg = -2.17 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU LTE Band 14 10M QPSK 25RB13 23330CH Back side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 793 \text{ MHz}$; $\sigma = 0.875 \text{ S/m}$; $\epsilon_r = 41.972$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.75, 10.75, 10.75); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.597 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.534 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.861 W/kg

SAR(1 g) = 0.309 W/kg ; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.638 W/kg

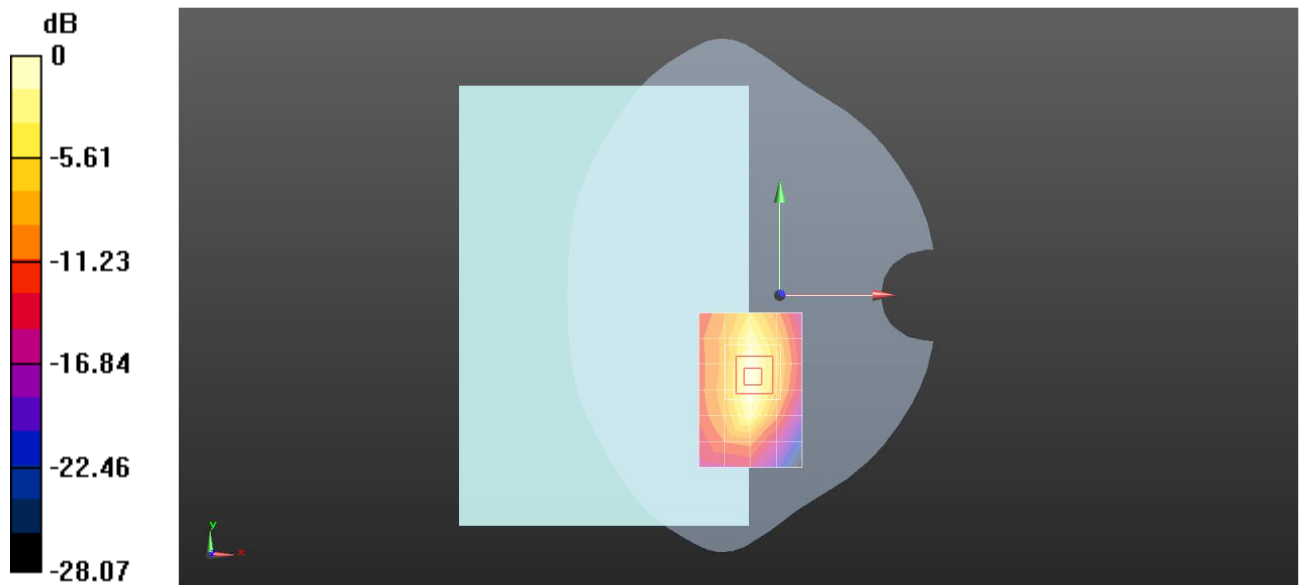

0 dB = 0.597 W/kg = -2.24 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU LTE Band 25 20M QPSK 1RB50 26590CH Back side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1905$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 38.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.41, 8.41, 8.41); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.685 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.126 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.934 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.686 W/kg

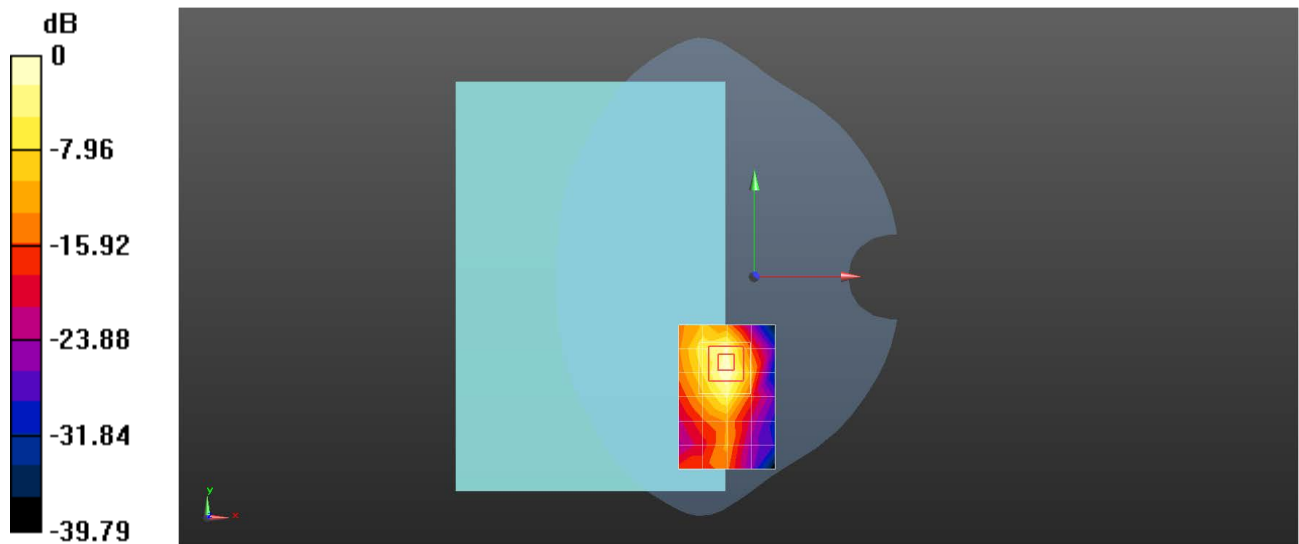

0 dB = 0.685 W/kg = -1.64 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU LTE Band 26 15M QPSK 36RB18 26965CH Back side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.81$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.35, 10.35, 10.35); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.565 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.982 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.308 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 0.643 W/kg

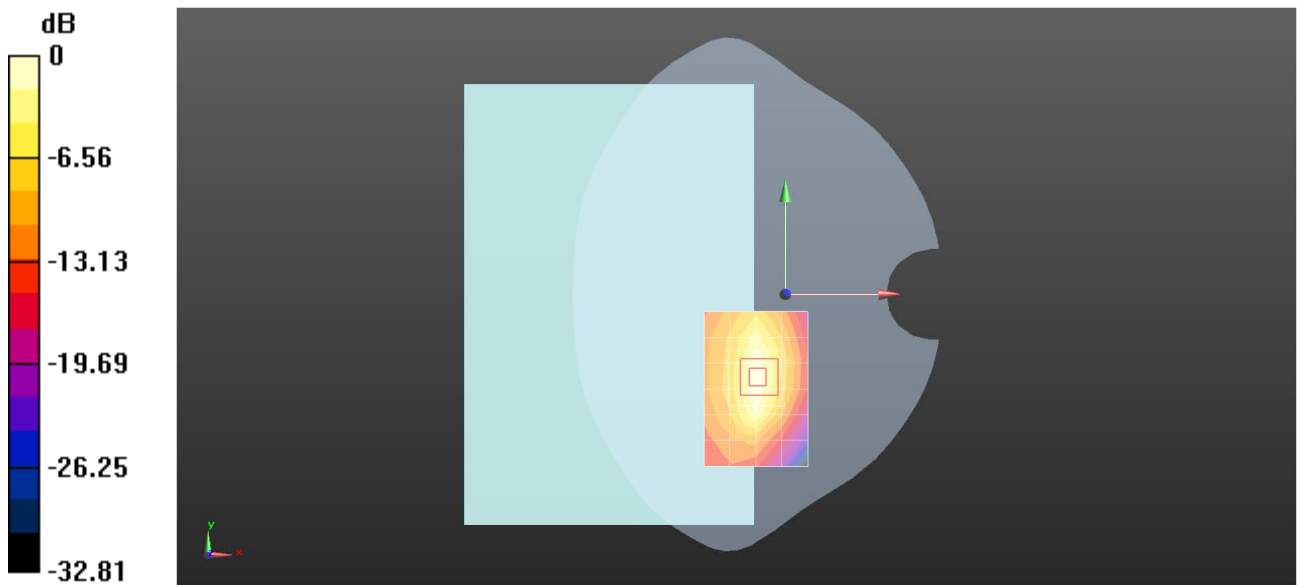

0 dB = 0.565 W/kg = -2.48 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU LTE Band 30 10M QPSK 1RB25 27710CH Back side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.654$ S/m; $\epsilon_r = 38.955$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.23, 8.23, 8.23); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.473 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.572 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.993 W/kg

SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.741 W/kg

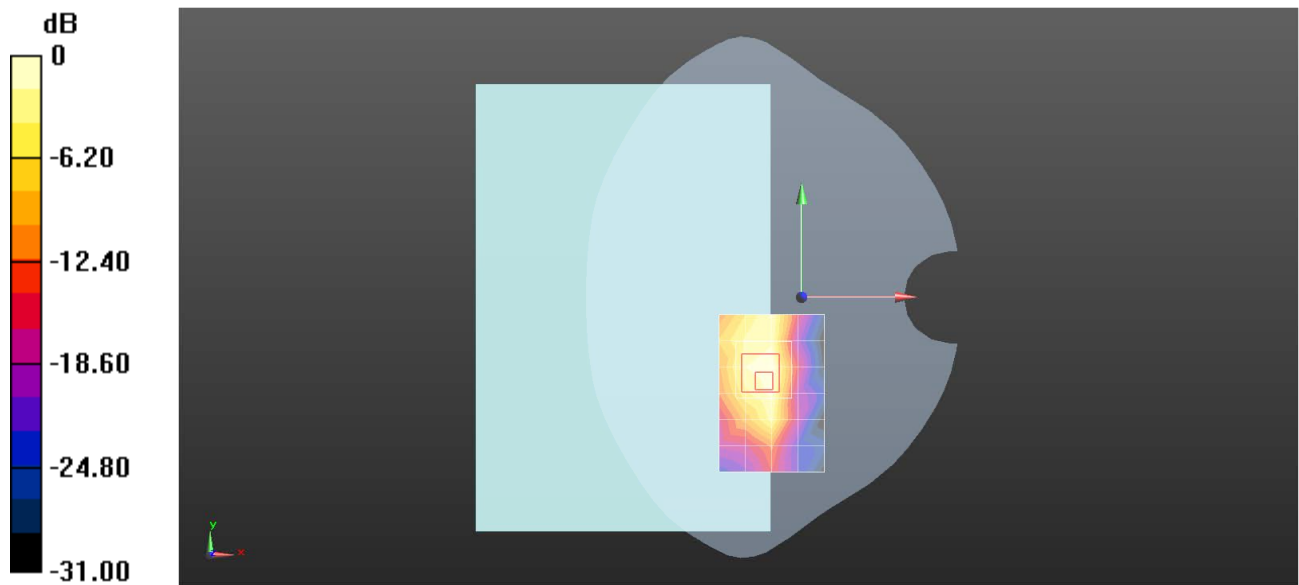

0 dB = 0.473 W/kg = -3.26 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU LTE Band 41 20M QPSK 1RB50 39750CH Back side 0mm class2

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2506 MHz; Duty Cycle: 1:1.57906

Medium: HSL2600; Medium parameters used: $f = 2506$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 38.259$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.638 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.589 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.729 W/kg

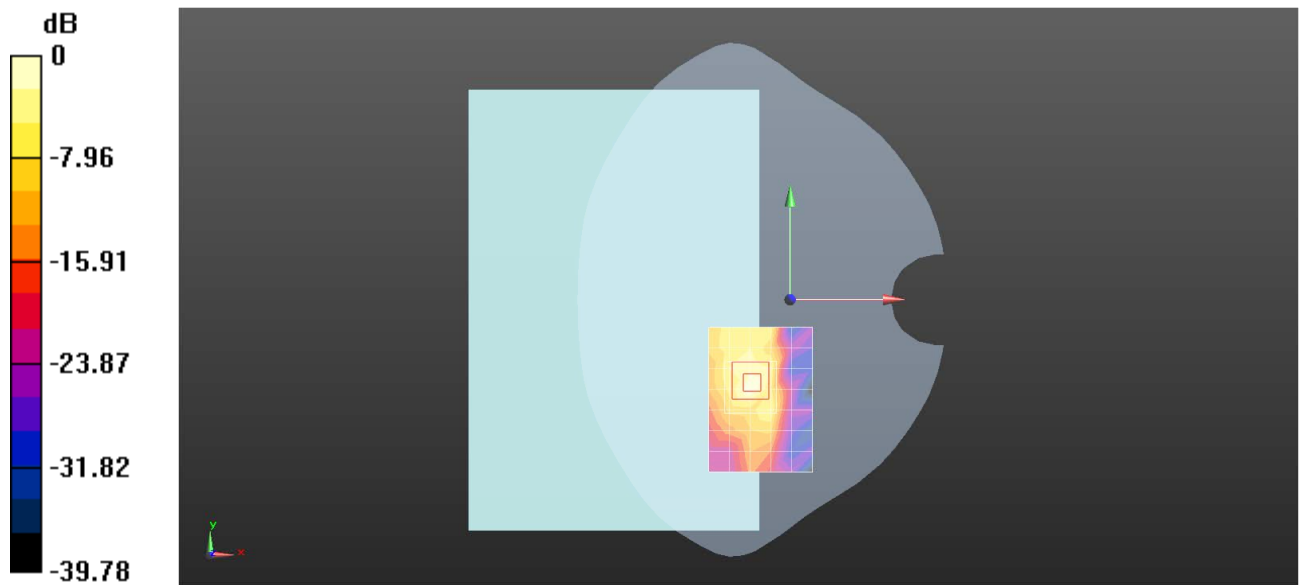

0 dB = 0.638 W/kg = -1.95 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU LTE Band 66 20M QPSK 50RB25 132072CH Back side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1720$ MHz; $\sigma = 1.346$ S/m; $\epsilon_r = 40.43$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(8.75, 8.75, 8.75); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.587 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.5160 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.766 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.550 W/kg

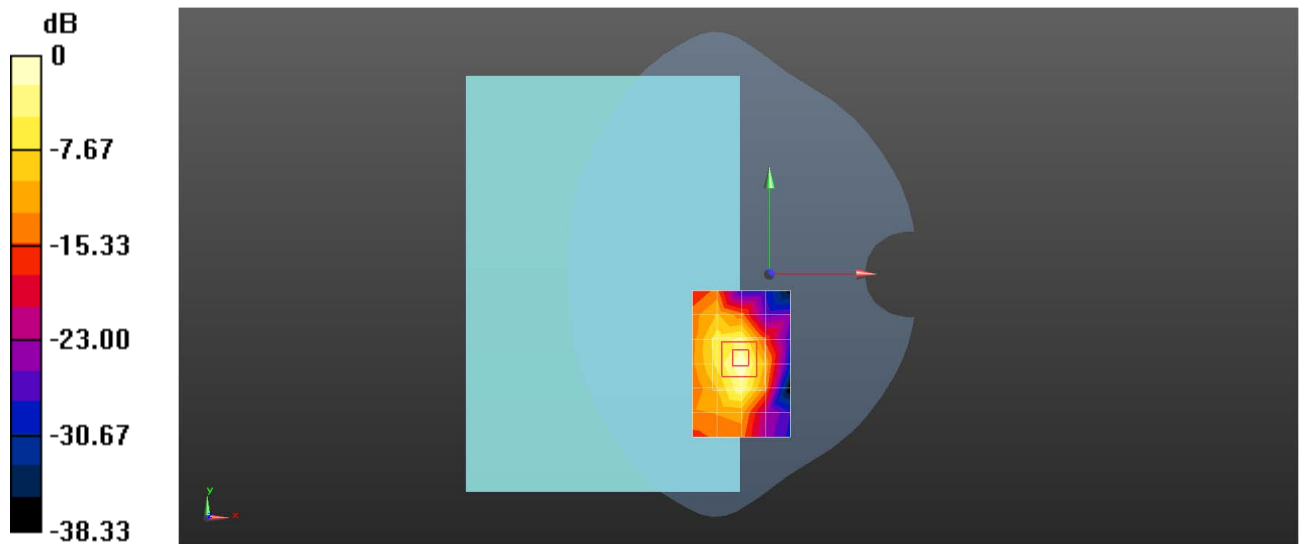

0 dB = 0.587 W/kg = -2.31 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU LTE Band 71 20M QPSK 1RB50 133222CH Back side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 673 MHz; Duty Cycle: 1:1

Medium: HSL700; Medium parameters used: $f = 673 \text{ MHz}$; $\sigma = 0.846 \text{ S/m}$; $\epsilon_r = 42.719$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(10.75, 10.75, 10.75); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.875 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.71 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.392 W/kg ; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.826 W/kg

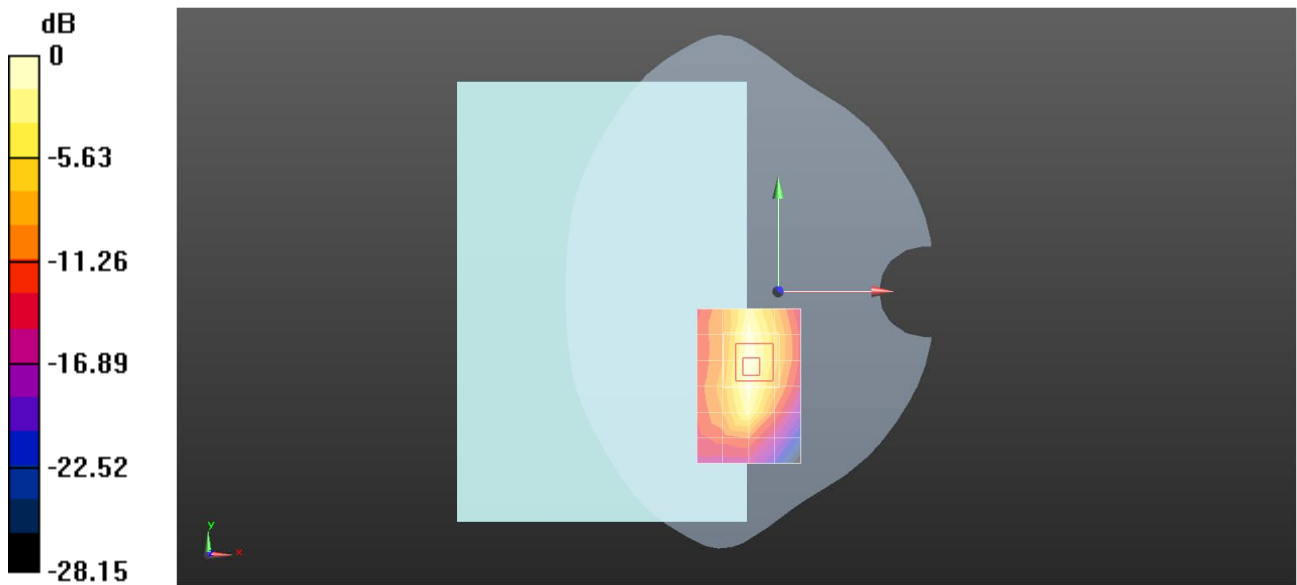

0 dB = 0.875 W/kg = -0.58 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU Wifi2.4g 802.11b 6CH Back side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1.007

Medium: HSL2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.798$ S/m; $\epsilon_r = 38.483$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.871 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.7410 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.59 W/kg

SAR(1 g) = 0.838 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 1.61 W/kg

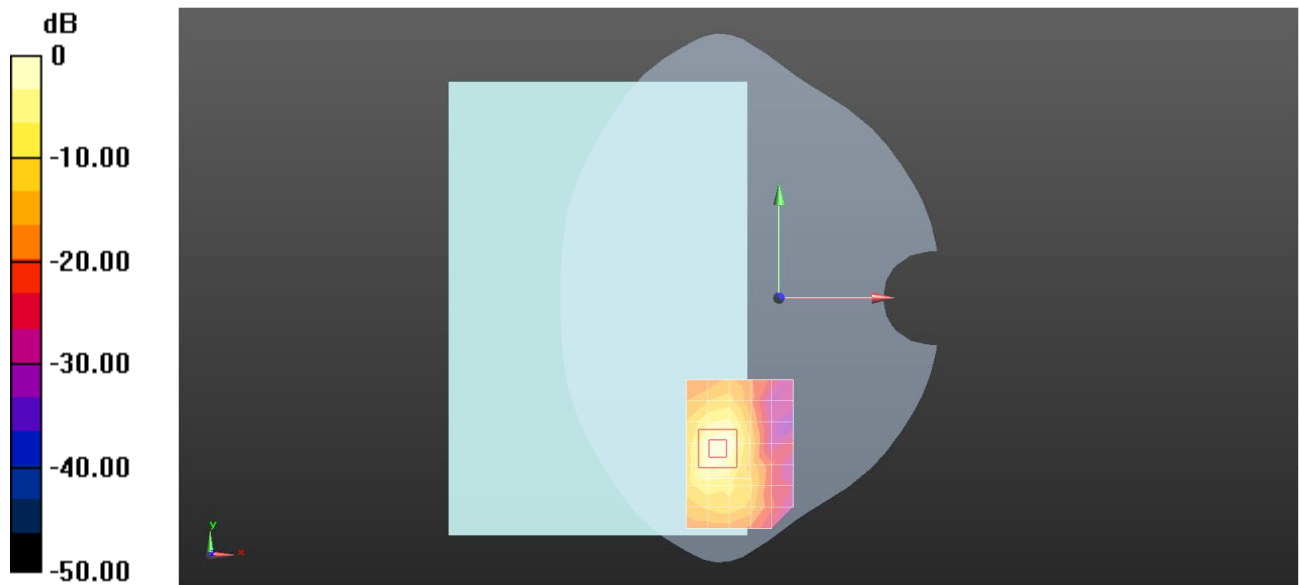

0 dB = 0.871 W/kg = -0.60 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU Wifi5g 802.11a 161CH Back side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060003547

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5805 MHz; Duty Cycle: 1:1.063

Medium: HSL5G; Medium parameters used: $f = 5805 \text{ MHz}$; $\sigma = 5.387 \text{ S/m}$; $\epsilon_r = 34.469$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(5.05, 5.05, 5.05); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.55 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 0.3480 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 4.50 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 2.07 W/kg

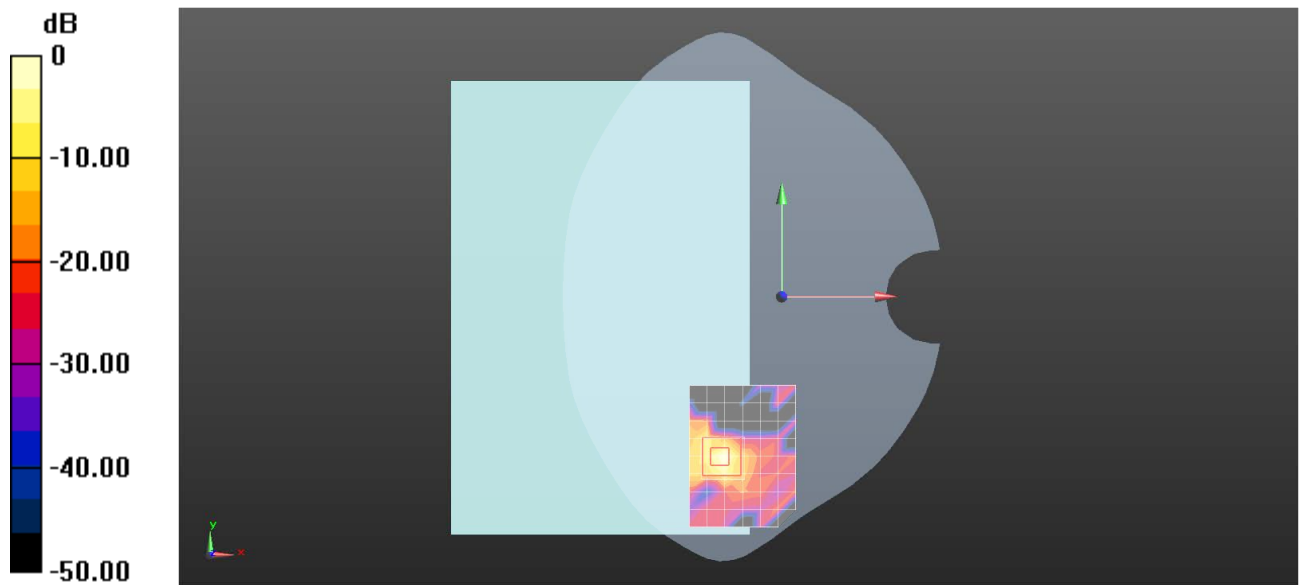

0 dB = 1.55 W/kg = 1.92 dBW/kg

Test Laboratory: SGS-SAR Lab

TB330XU Bluetooth DH5 78CH Back side 0mm

DUT: TB330XU; Type: Portable Tablet Computer; Serial: 865823060002861

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.307

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.848$ S/m; $\epsilon_r = 38.325$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3923; ConvF(7.95, 7.95, 7.95); Calibrated: 2023/2/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2022/11/18
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.669 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.921 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.672 W/kg

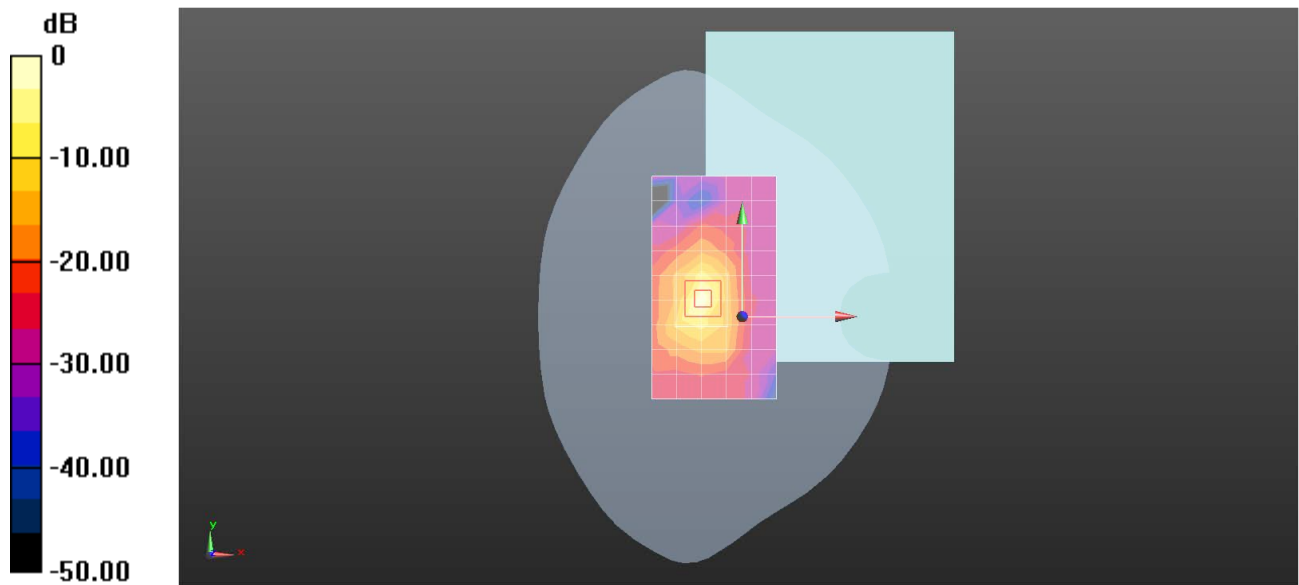

0 dB = 0.669 W/kg = -1.74 dBW/kg