



Test report No.: 2350034R-RFUSV03S-A

# TEST REPORT

Product Name	Mobile Computer
Trademark	CIPHERLAB
Model and /or type reference	RK26W6O
FCC ID	Q3N-RK26W6O
Applicant's name / address	CipherLab Co., Ltd. 12F, 333, Dunhua S.Rd., Sec.2, Taipei, Taiwan
Manufacturer's name	CIPHERLAB CO. LTD.
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart E ANSI C63.4: 2014, ANSI C63.10: 2013 KDB Publication 789033
Verdict Summary	IN COMPLIANCE
Documented By (Supervisor / Jinn Chen)	Jinn Chen
Tested By (Senior Engineer / Bill Lin)	Bill Lin
Approved By (Senior Engineer / Jack Hsu)	Jack Hsu
Date of Receipt	2023/05/03
Date of Issue	2023/08/07
Report Version	V1.0

## INDEX

---

	Page
<b>1. General Information.....</b>	<b>6</b>
1.1. EUT Description.....	6
1.2. Tested System Details.....	9
1.3. Configuration of tested System .....	9
1.4. EUT Exercise Software .....	9
1.5. Test Facility .....	10
1.6. List of Test Equipment.....	11
1.7. Uncertainty .....	12
<b>2. Conducted Emission .....</b>	<b>13</b>
2.1. Test Setup .....	13
2.2. Limits.....	13
2.3. Test Procedure .....	13
2.4. Test Result of Conducted Emission.....	14
<b>3. Maximun conducted output power .....</b>	<b>15</b>
3.1. Test Setup .....	15
3.2. Limits.....	16
3.3. Test Procedure .....	17
3.4. Test Result of Maximum conducted output power.....	18
<b>4. Peak Power Spectral Density .....</b>	<b>26</b>
4.1. Test Setup .....	26
4.2. Limits.....	26
4.3. Test Procedure .....	27
4.4. Test Result of Peak Power Spectral Density.....	28
<b>5. Radiated Emission .....</b>	<b>36</b>
5.1. Test Setup .....	36
5.2. Limits.....	37
5.3. Test Procedure .....	38
5.4. Test Result of Radiated Emission.....	39
<b>6. Band Edge .....</b>	<b>59</b>
6.1. Test Setup .....	59
6.2. Limits.....	60

---

6.3.	Test Procedure .....	61
6.4.	Test Result of Band Edge .....	62
<b>7.</b>	<b>Occupied Bandwidth .....</b>	<b>79</b>
7.1.	Test Setup .....	79
7.2.	Limits.....	79
7.3.	Test Procedure .....	79
7.4.	Test Result of Occupied Bandwidth .....	80
<b>8.</b>	<b>Duty Cycle .....</b>	<b>84</b>
8.1.	Test Setup .....	84
8.2.	Test Procedure .....	84
8.3.	Test Result of Duty Cycle.....	85

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 2350034R-Product Photos-FCC, ISED

## Competences and Guarantees

---

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

## General conditions

---

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

## Revision History

---

Report No.	Version	Description	Issued Date
2350034R-RFUSV03S-A	V1.0	Initial issue of report.	2023/08/07

## 1. General Information

### 1.1. EUT Description

Product Name	Mobile Computer
Trademark	CIPHERLAB
Model and /or type reference	RK26W6O
EUT Rated Voltage	AC 100-240V, 50-60Hz or DC 3.8V (Power by Battery)
EUT Test Voltage	AC 120V/60Hz and DC 3.8V (Power by Battery)
Frequency Range	802.11a/n/ac/ax-20 MHz: 5180-5320 MHz, 5500-5700 MHz, 5745-5825 MHz 802.11n/ac/ax-40 MHz: 5190-5310 MHz, 5510-5670MHz, 5755-5795 MHz 802.11ac/ax-80 MHz: 5210-5290 MHz, 5530-5610 MHz, 5775 MHz
Number of Channels	802.11a/n/ac/ax-20 MHz: 24CH 802.11n/ac/ax-40 MHz: 11CH 802.11ac/ax-80 MHz: 5CH
Data Rate	802.11a: 6-54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 866.7 Mbps 802.11ax: up to 1201 Mbps
Type of Modulation	802.11a/n/ac/ax: OFDM, OFDMA, BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Channel Control	Auto
Power / data Cable (Optional)	Non-shielded, 1.5m, with one ferrite core bonded.
Power Adapter #1 (Optional)	MFR: Sunny, M/N: SYS1561-1005 Input: AC 100-240V~, 1.0A MAX, 50-60Hz Output: +5.0V=2.0A, 10.0W MAX.
Power Adapter #2 (Optional)	MFR: CWT, M/N: 2AEA010BC3D Input: AC 100-240V~ 50/60Hz 0.35A Output: 5.0V=2.0A, 10.0W

## Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Auden	BRK26REH00001 (Main)	PIFA	-1.5 dBi for 5150~5250 MHz -0.8dBi for 5250~5350 MHz 2.3 dBi for 5470~5725 MHz 2.3 dBi for 5725~5850 MHz
		BRK26REH00001 (Aux)	PIFA	0.6 dBi for 5150~5250 MHz 1.4 dBi for 5250~5350 MHz 0.8 dBi for 5470~5725 MHz 1.5 dBi for 5725~5850 MHz

Note: The antenna gain as by the manufacturer provided.

## 802.11a/n/ac/ax-20 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	44	5220	48	5240
52	5260	56	5280	60	5300	64	5320
100	5500	104	5520	108	5540	112	5560
116	5580	120	5600	124	5620	128	5640
132	5660	136	5680	140	5700	149	5745
153	5765	157	5785	161	5805	165	5825

## 802.11n/ac/ax-40 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	54	5270	62	5310
102	5510	110	5550	118	5590	126	5630
134	5670	151	5755	159	5795	--	--

## 802.11ac/ax-80 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	122	5610
155	5775	--	--	--	--	--	--

## Note:

1. This device is a Mobile Computer with built-in WLAN and Bluetooth transceiver, this report for 5GHz WLAN.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
5. DEKRA has evaluated each test mode. Only the worst case is shown in the report.
6. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance of transmitter with Part 15 Subpart E for Unlicensed National Information Infrastructure devices.

Test Mode	Mode 1	Transmit (802.11a)
		Transmit (802.11ax-20 MHz)
		Transmit (802.11ax-40 MHz)
		Transmit (802.11ax-80 MHz)




### 1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Power Adapter	Sunny	SYS1561-1005	N/A	N/A
2 Microphone & Earphone	Verbatim	C09024VB	N/A	N/A

Cable Type	Cable Description
A Power / data Cable	Non-shielded, 1.5m, with one ferrite core bonded.
B Microphone & Earphone Cable	Non-shielded, 1.2m

### 1.3. Configuration of tested System

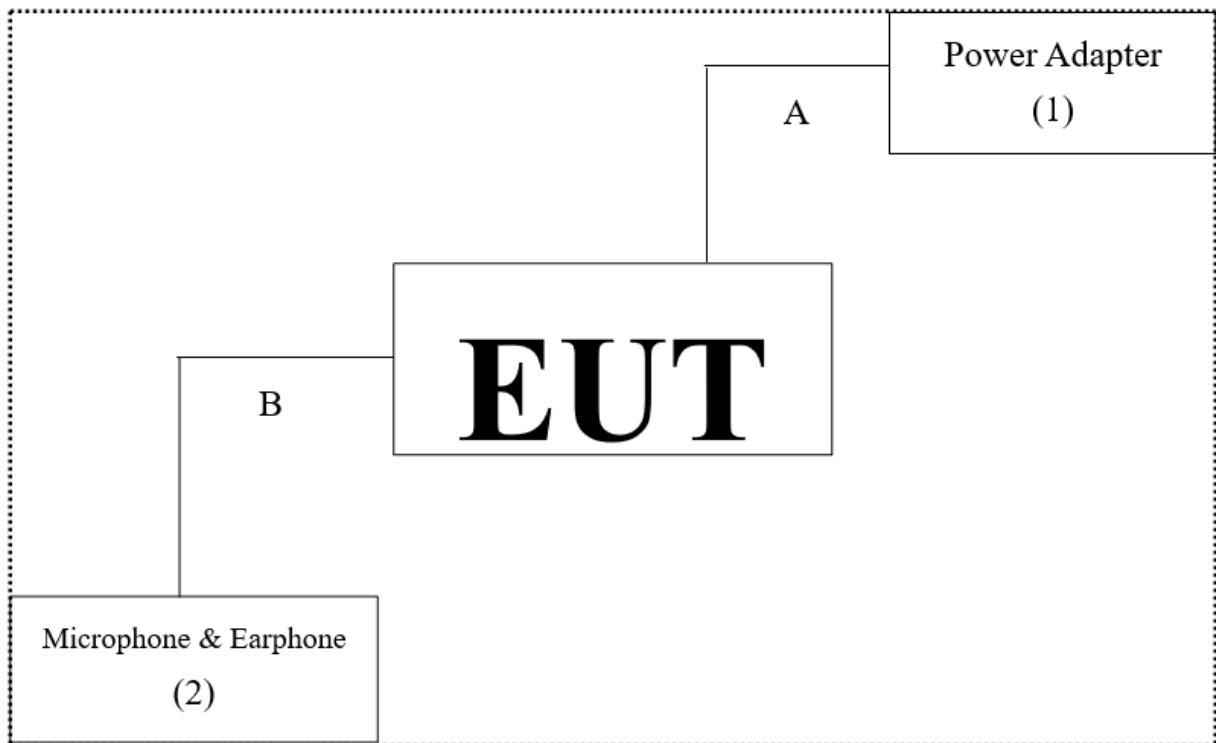

### 1.4. EUT Exercise Software

1	Setup the EUT as shown in Section 1.3.
2	Execute software “Command character Ver. 10.0.18363.1198” on the Notebook PC.
3	Configure the test mode, the test channel, and the data rate.
4	Press “OK” to start the continuous transmit.
5	Verify that the EUT works properly.
6	Remove Notebook PC.

## 1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	25.1 °C
	Humidity (%RH)	10~90 %	55.6 %
Radiated Emission	Temperature (°C)	10~40 °C	23.5 °C
	Humidity (%RH)	10~90 %	50.0 %
Conductive	Temperature (°C)	10~40 °C	22.0 °C
	Humidity (%RH)	10~90 %	55.0 %

USA	FCC Registration Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
	Linkou Laboratory
Address	No.5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan, R.O.C
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

## 1.6. List of Test Equipment

**For Conduction Measurements / HY-SR01**

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2022/06/23	2023/06/22
V	Two-Line V-Network	R&S	ENV216	101306	2023/03/16	2024/03/15
V	Two-Line V-Network	R&S	ENV216	102202	2022/08/08	2023/08/07
V	Coaxial Cable	SUHNER	RG400 BNC	RF001	2023/01/10	2024/01/09

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

**For Conducted Measurements / HY-SR02**

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Spectrum Analyzer	R&S	FSV30	103466	2022/12/22	2023/12/21
V	Peak Power Analyzer	KEYSIGHT	8990B	MY51000539	2023/05/15	2024/05/14
V	Power Sensor	KEYSIGHT	N1923A	MY59240002	2023/05/18	2024/05/17
V	Power Sensor	KEYSIGHT	N1923A	MY59240003	2023/05/18	2024/05/17

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: RF Conducted Test Tools R3 V3.0.1.14.

**For Radiated Measurements / HY-CB03**

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Loop Antenna	AMETEK	HLA6121	49611	2023/02/21	2024/02/20
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2021/08/11	2023/08/10
V	Horn Antenna	Com-Power	AH-840	101100	2021/10/04	2023/10/03
V	Horn Antenna	RF SPIN	DRH18-E	210507A18ES	2023/05/11	2024/05/10
V	Pre-Amplifier	SGH	0301	20211007-10	2023/01/10	2024/01/09
V	Pre-Amplifier	SGH	PRAMP118	20200701	2023/01/10	2024/01/09
V	Pre-Amplifier	EMCI	EMC05820SE	980310	2023/01/10	2024/01/09
	Pre-Amplifier	EMCI	EMC184045SE	980369	2023/01/10	2024/01/09
V	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242		
V	Filter	MICRO TRONICS	BRM50702	G269	2023/01/05	2024/01/04
	Filter	MICRO TRONICS	BRM50716	G196	2023/01/05	2024/01/04
V	EMI Test Receiver	R&S	ESR3	102793	2022/12/05	2023/12/04
V	Spectrum Analyzer	R&S	FSV3044	101114	2023/02/16	2024/02/15
	Coaxial Cable	SGH	SGH18	2021005-1	2023/01/10	2024/01/09
V	Coaxial Cable	SGH	SGH18	202108-4		
	Coaxial Cable	SGH	HA800	GD20110223-1		
	Coaxial Cable	SGH	HA800	GD20110222-3		

Note:

1. Bi-Log Antenna and Horn Antenna(AH-840) is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

### 1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty
Conducted Emission	$\pm 3.50$ dB
Maximum conducted output power	Spectrum Analyzer: $\pm 2.14$ dB Power Meter: $\pm 1.05$ dB
Peak Power Spectral Density	$\pm 2.14$ dB
Radiated Emission	9 kHz~30 MHz: $\pm 3.88$ dB 30 MHz~1 GHz: $\pm 4.42$ dB 1 GHz~18 GHz: $\pm 4.28$ dB 18 GHz~40 GHz: $\pm 3.90$ dB
Band Edge	9 kHz~30 MHz: $\pm 3.88$ dB 30 MHz~1 GHz: $\pm 4.42$ dB 1 GHz~18 GHz: $\pm 4.28$ dB 18 GHz~40 GHz: $\pm 3.90$ dB
Occupied Bandwidth	$\pm 1580.61$ Hz
Duty Cycle	$\pm 0.53$ %

## 2. Conducted Emission

### 2.1. Test Setup

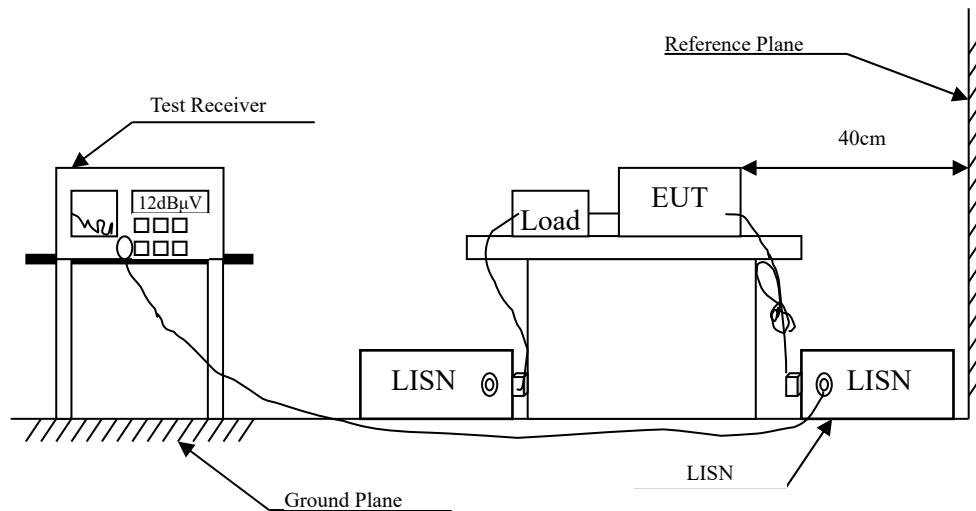

### 2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.


### 2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:2014 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz.


## 2.4. Test Result of Conducted Emission

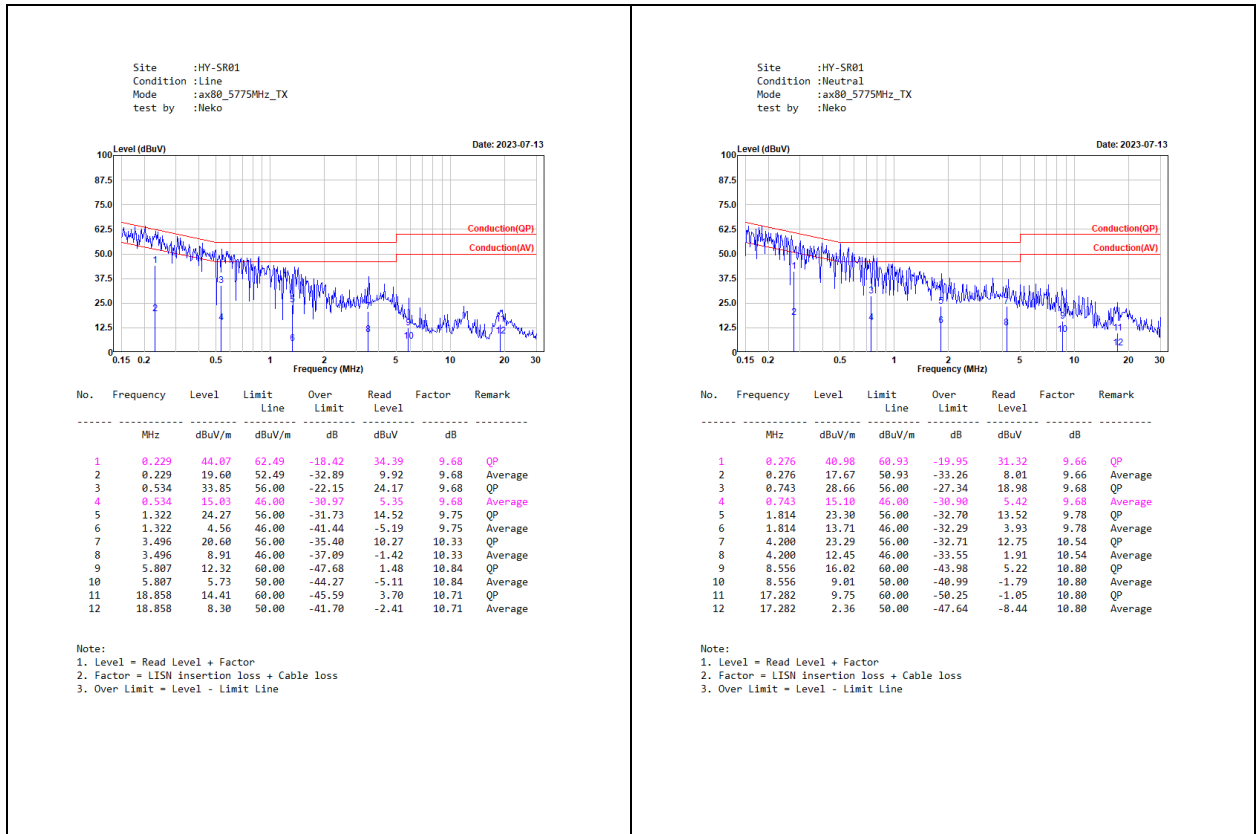

### 3. Maximun conducted output power


#### 3.1. Test Setup

26dB Occupied Bandwidth

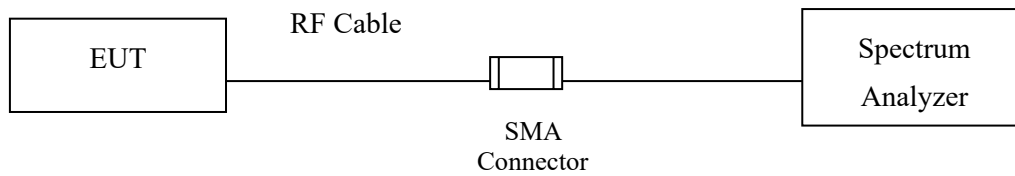


Conduction Power Measurement

Conduction Power Measurement (for 802.11an)

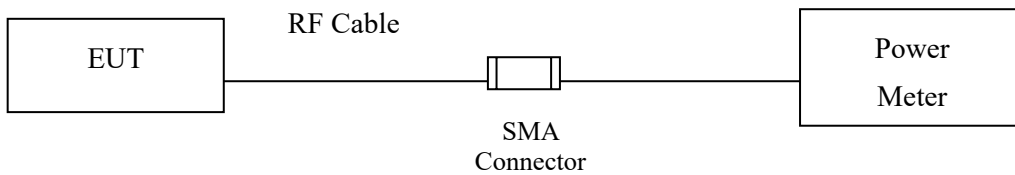

Conduction Power Measurement (for 802.11ac/ax)

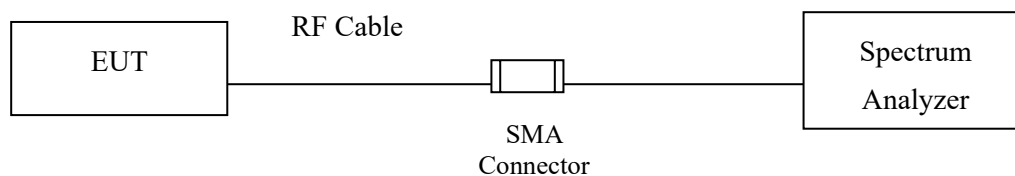

### 3.2. Limits

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 3.3. Test Procedure

As an alternative to FCC KDB-789033, the EUT maximum conducted output power was measured with an average power meter employing a video bandwidth greater the 6dB BW of the emission under test. Maximum conducted output power was read directly from the meter across all data rates, and across three channels within each sub-band. Special care was used to make sure that the EUT was transmitting in continuous mode. This method exceeds the limitations of FCC KDB-789033, and provides more accurate measurements.

802.11an (BW  $\leq$  40MHz) Maximum conducted output power using KDB 789033 section E)3)b) Method PM-G (Measurement using a gated RF average power meter)

Note: the power meter have a video bandwidth that is greater than or equal to the measurement bandwidth, (Anritsu/ MA2411B video bandwidth: 65MHz)

802.11ac (BW=80MHz) Maximum conducted output power using KDB 789033 section E)2)b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep).

When transmitted signals consist of two or more non-contiguous spectrum segments (e.g., 80+80 MHz mode) or when a single spectrum segment of a transmission crosses the boundary between two adjacent U-NII bands, KDB 644545 D03 section D) procedure is used for measurements.

## 3.4. Test Result of Maximum conducted output power

Product : Mobile Computer  
 Test Item : Maximum conducted output power  
 Test Mode : Transmit (802.11a)  
 Test Date : 2023/06/05


Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Duty factor (dB)	Output Power Limit	
							(dBm)	dBm+10log(BW)
36	5180	--	11.57	12.68	15.17	--	24	--
44	5220	--	11.76	12.51	15.16	--	24	--
48	5240	--	11.72	12.46	15.12	--	24	--
52	5260	21.98	11.75	12.37	15.08	--	24	24.42
60	5300	21.70	12.07	12.18	15.14	--	24	24.36
64	5320	21.78	12.24	12.15	15.21	--	24	24.38
100	5500	21.38	12.48	11.61	15.08	--	24	24.30
116	5580	21.74	12.72	11.43	15.13	--	24	24.37
140	5700	21.82	12.80	11.82	15.35	--	24	24.39
149	5745	--	13.03	11.20	15.22	--	30	--
157	5785	--	12.91	11.41	15.23	--	30	--
165	5825	--	12.96	11.48	15.29	--	30	--

Note:

1. Output Power Value (dBm) = 10\*LOG (Chain A(mW) + Chain B(mW))
2. 26dB Bandwidth is the bandwidth of chain A or B whichever is less bandwidth, output power limitation is more stringent.

26dB Occupied Bandwidth:

Channel 52

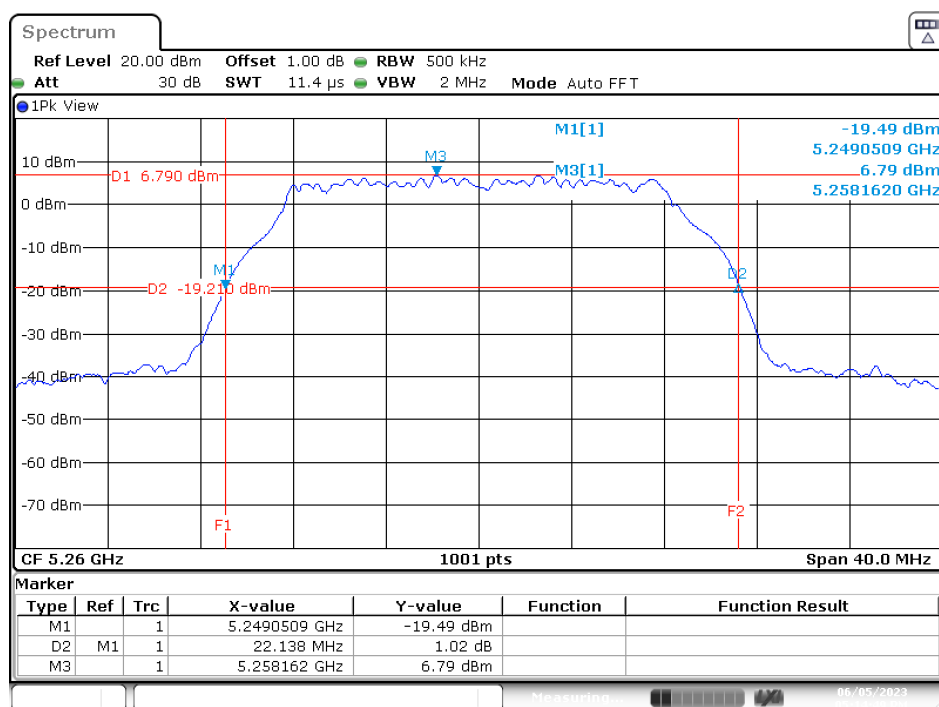

Date: 5.JUN.2023 17:14:49

Product : Mobile Computer  
 Test Item : Maximum conducted output power  
 Test Mode : Transmit (802.11ax-20 MHz)  
 Test Date : 2023/06/05


Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Duty factor (dB)	Output Power Limit	
							(dBm)	dBm+10log(BW)
36	5180	--	11.64	12.71	15.22	--	24	--
44	5220	--	11.64	12.61	15.16	--	24	--
48	5240	--	11.86	12.44	15.17	--	24	--
52	5260	21.98	11.90	12.40	15.17	--	24	24.42
60	5300	21.90	12.06	12.31	15.20	--	24	24.40
64	5320	21.98	12.26	12.13	15.21	--	24	24.42
100	5500	21.90	12.66	11.80	15.26	--	24	24.40
116	5580	21.90	12.80	11.67	15.28	--	24	24.40
140	5700	21.94	12.76	11.58	15.22	--	24	24.41
149	5745	--	12.89	11.05	15.08	--	30	--
157	5785	--	12.85	11.13	15.08	--	30	--
165	5825	--	12.82	11.32	15.14	--	30	--

Note:

1. Output Power Value (dBm) = 10\*LOG (Chain A(mW) + Chain B(mW))
2. 26dB Bandwidth is the bandwidth of chain A or B whichever is less bandwidth, output power limitation is more stringent.

## 26dB Occupied Bandwidth:

## Channel 64

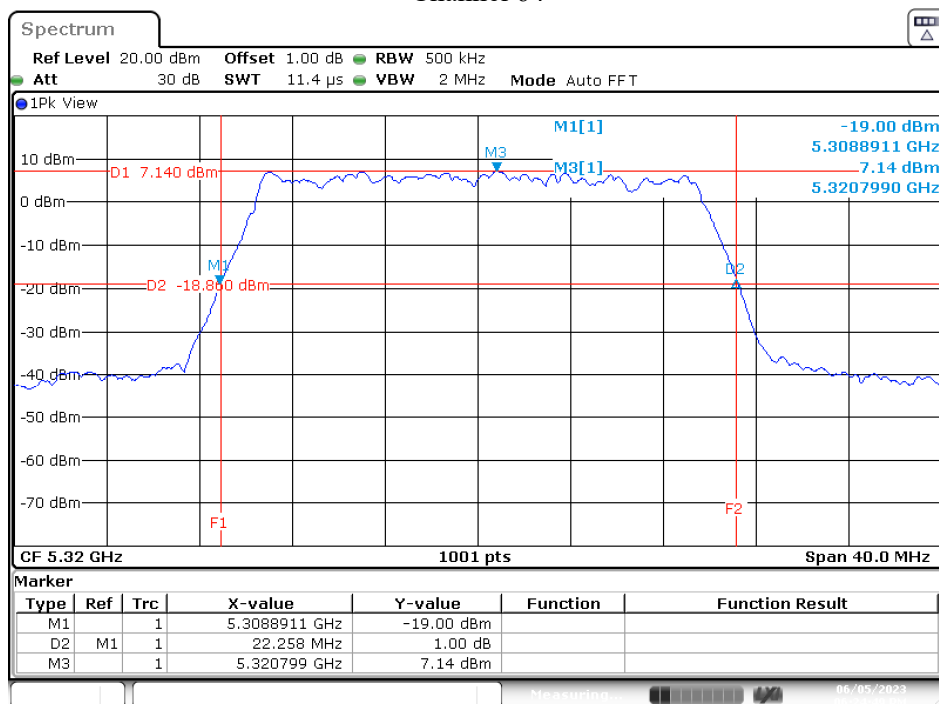

Date: 5.JUN.2023 18:24:49

Product : Mobile Computer  
 Test Item : Maximum conducted output power  
 Test Mode : Transmit (802.11ax-40 MHz)  
 Test Date : 2023/06/05


Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Duty factor (dB)	Output Power Limit	
							(dBm)	dBm+10log(BW)
38	5190	--	11.97	12.23	15.11	--	24	--
46	5230	--	12.21	12.40	15.32	--	24	--
54	5270	40.12	12.12	12.61	15.38	--	24	27.03
62	5310	40.04	12.09	12.26	15.19	--	24	27.02
102	5510	39.80	12.68	11.52	15.15	--	24	27.00
110	5550	39.96	12.95	11.30	15.21	--	24	27.02
134	5670	40.04	12.83	11.18	15.09	--	24	27.02
151	5755	--	13.07	10.97	15.16	--	30	--
159	5795	--	12.91	11.24	15.17	--	30	--

Note:

1. Output Power Value (dBm) =  $10 \cdot \text{LOG} (\text{Chain A(mW)} + \text{Chain B(mW)})$
2. 26dB Bandwidth is the bandwidth of chain A or B whichever is less bandwidth, output power limitation is more stringent.

26dB Occupied Bandwidth:

Channel 62

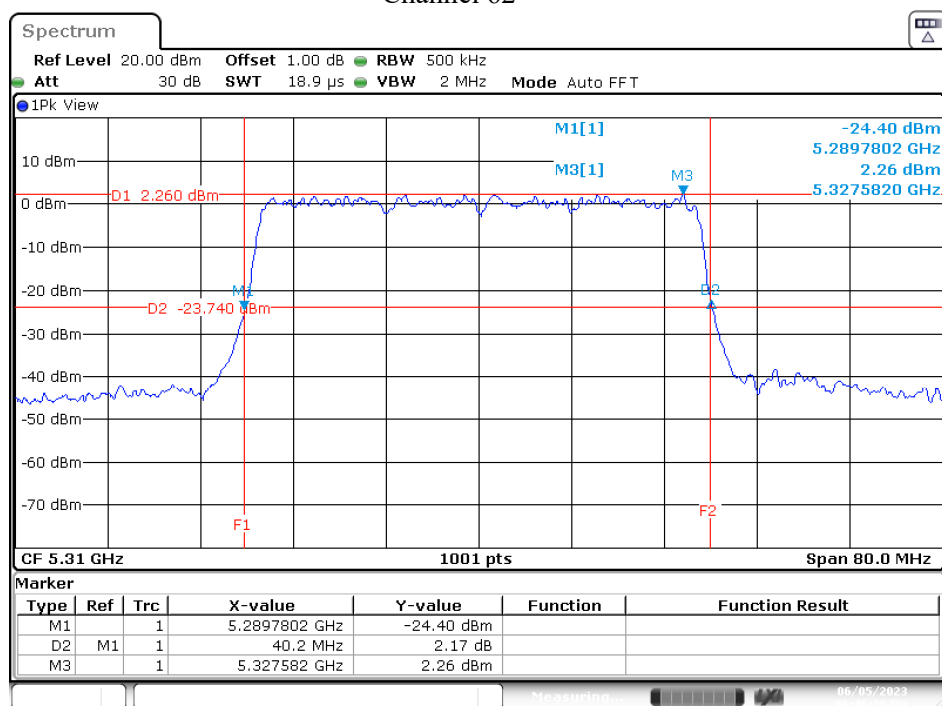

Date: 5.JUN.2023 18:46:40

Product : Mobile Computer  
 Test Item : Maximum conducted output power  
 Test Mode : Transmit (802.11ax-80 MHz)  
 Test Date : 2023/06/05

Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Duty factor (dB)	Output Power Limit	
							(dBm)	dBm+10log(BW)
42	5210	--	11.82	12.71	15.30	--	24	--
58	5290	81.20	11.72	12.53	15.15	--	24	30.10
106	5530	81.04	12.80	11.41	15.17	--	24	30.09
122	5610	81.04	12.95	11.13	15.14	--	24	30.09
155	5775	--	12.94	11.56	15.31	--	30	--


Note:

1. Output Power Value (dBm) =  $10 \cdot \text{LOG} (\text{Chain A(mW)} + \text{Chain B(mW)})$
2. 26dB Bandwidth is the bandwidth of chain A or B whichever is less bandwidth, output power limitation is more stringent.



26dB Occupied Bandwidth:


Channel 122

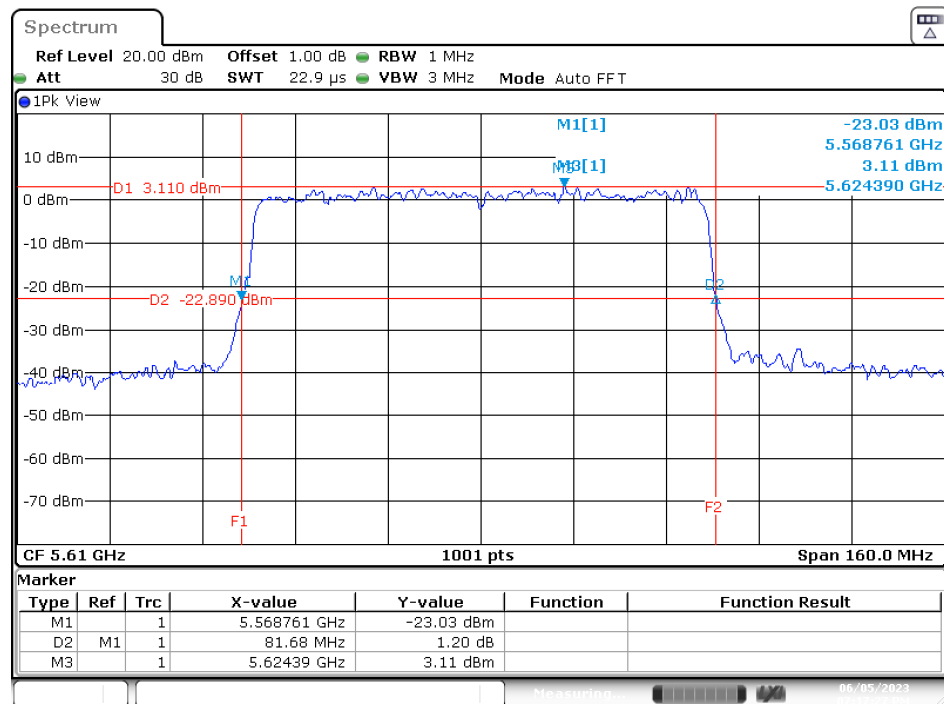

Date: 5.JUN.2023 19:17:26

## 4. Peak Power Spectral Density

### 4.1. Test Setup

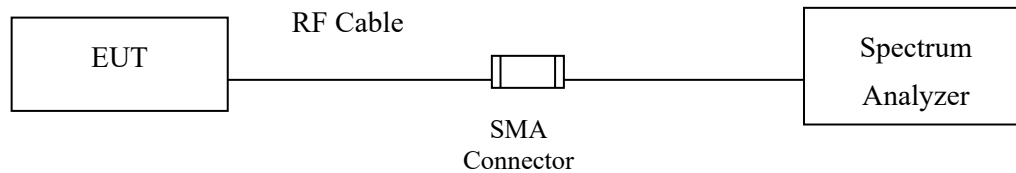

### 4.2. Limits

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.+

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

#### 4.3. Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

The Peak Power Spectral Density using KDB 789033 section F) procedure, Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer.

SA-1 method is selected to run the test.

## 4.4. Test Result of Peak Power Spectral Density

Product : Mobile Computer  
 Test Item : Peak Power Spectral Density  
 Test Mode : Transmit (802.11a)  
 Test Date : 2023/06/05

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
36	5180	6	A	-1.99	0.32	1.34	<11	Pass
			B	-0.20	0.32	3.13		Pass
44	5220	6	A	-0.83	0.32	2.50	<11	Pass
			B	1.20	0.32	4.53		Pass
48	5240	6	A	0.00	0.32	3.33	<11	Pass
			B	1.10	0.32	4.43		Pass
52	5260	6	A	-1.23	0.32	2.10	<11	Pass
			B	1.00	0.32	4.33		Pass
60	5300	6	A	-1.12	0.32	2.21	<11	Pass
			B	0.58	0.32	3.91		Pass
64	5320	6	A	-0.60	0.32	2.73	<11	Pass
			B	0.47	0.32	3.80		Pass
100	5500	6	A	0.07	0.32	3.40	<11	Pass
			B	-0.22	0.32	3.11		Pass
116	5580	6	A	-0.39	0.32	2.94	<11	Pass
			B	0.10	0.32	3.43		Pass
140	5700	6	A	-0.48	0.32	2.85	<11	Pass
			B	-0.37	0.32	2.96		Pass

Note:


1. Total PSD/MHz = PSD/MHz +  $10 \cdot \log 2$  (two antennas) + Duty factor.
2. The quantity  $10 \cdot \log 2$  (two antennas) is added to the spectrum peak value according to document 662911 D01.

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PPSSD/MHz (dBm)	Required Limit (dBm)	Result
149	5745	6	A	-2.71	0.32	0.62	<30	Pass
			B	-3.97	0.32	-0.64		Pass
157	5785	6	A	-2.60	0.32	0.73	<30	Pass
			B	-3.37	0.32	-0.04		Pass
165	5825	6	A	-2.64	0.32	0.69	<30	Pass
			B	-3.21	0.32	0.12		Pass


Note:

1. Total PPSSD/MHz = PPSSD/MHz +10\*log 2 (two antennas)+Duty factor.
2. The quantity 10\*log 2 (two antennas) is added to the spectrum peak value according to document 662911 D01.

Channel 44

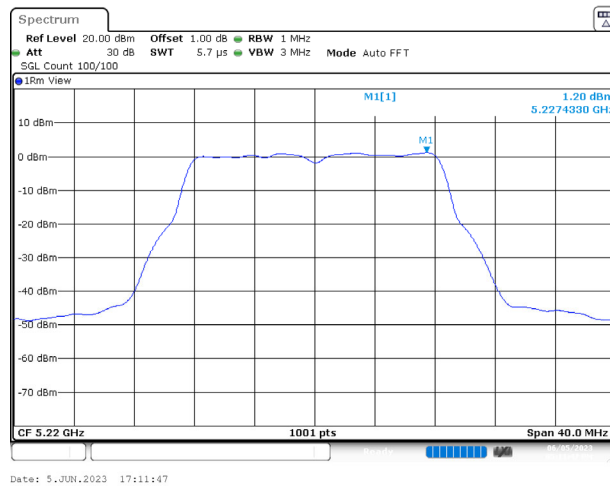

Channel 157

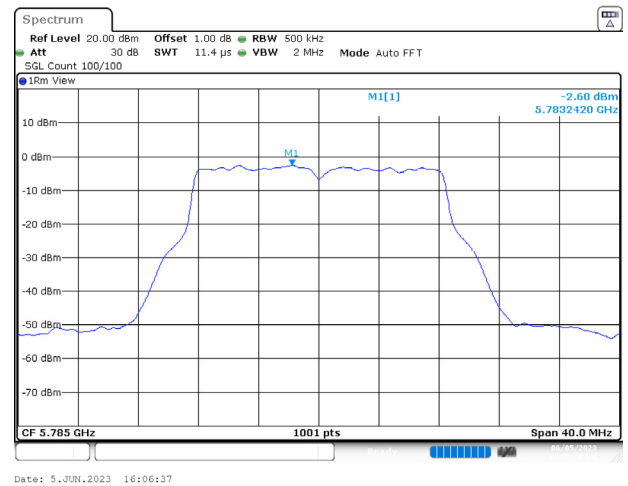

X

Product : Mobile Computer  
 Test Item : Peak Power Spectral Density  
 Test Mode : Transmit (802.11ax-20 MHz)  
 Test Date : 2023/06/05

Channel No.	Frequency (MHz)	Data Rate	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
36	5180	MCS0	A	-1.28	0.13	1.86	<11	Pass
			B	0.58	0.13	3.72		Pass
44	5220	MCS0	A	-1.01	0.13	2.13	<11	Pass
			B	0.89	0.13	4.03		Pass
48	5240	MCS0	A	-0.94	0.13	2.20	<11	Pass
			B	1.00	0.13	4.14		Pass
52	5260	MCS0	A	-1.56	0.13	1.58	<11	Pass
			B	1.14	0.13	4.28		Pass
60	5300	MCS0	A	-1.10	0.13	2.04	<11	Pass
			B	0.41	0.13	3.55		Pass
64	5320	MCS0	A	-1.27	0.13	1.87	<11	Pass
			B	0.24	0.13	3.38		Pass
100	5500	MCS0	A	-0.08	0.13	3.06	<11	Pass
			B	0.32	0.13	3.46		Pass
116	5580	MCS0	A	-0.27	0.13	2.87	<11	Pass
			B	0.08	0.13	3.22		Pass
140	5700	MCS0	A	-0.18	0.13	2.96	<11	Pass
			B	-0.76	0.13	2.38		Pass

Note:


1. Total PSD/MHz = PSD/MHz +10\*log 2 (two antennas)+Duty factor.
2. The quantity 10\*log 2 (two antennas) is added to the spectrum peak value according to document 662911 D01.

Channel No.	Frequency (MHz)	Data Rate	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PPSD/MHz (dBm)	Required Limit (dBm)	Result
149	5745	MCS0	A	-3.81	0.13	-0.67	<30	Pass
			B	-4.29	0.13	-1.15		Pass
157	5785	MCS0	A	-3.07	0.13	0.07	<30	Pass
			B	-3.84	0.13	-0.70		Pass
165	5825	MCS0	A	-3.22	0.13	-0.08	<30	Pass
			B	-3.20	0.13	-0.06		Pass


Note:

1. Total PPSD/MHz = PPSD/MHz + 10\*log 2 (two antennas) + Duty factor.
2. The quantity 10\*log 2 (two antennas) is added to the spectrum peak value according to document 662911 D01.

Channel 52

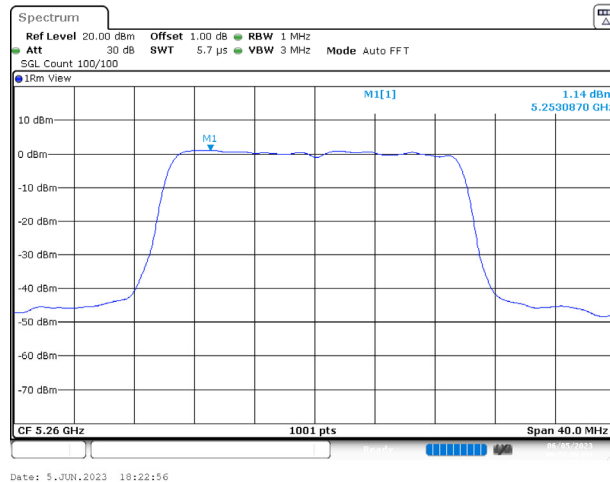

Channel 157

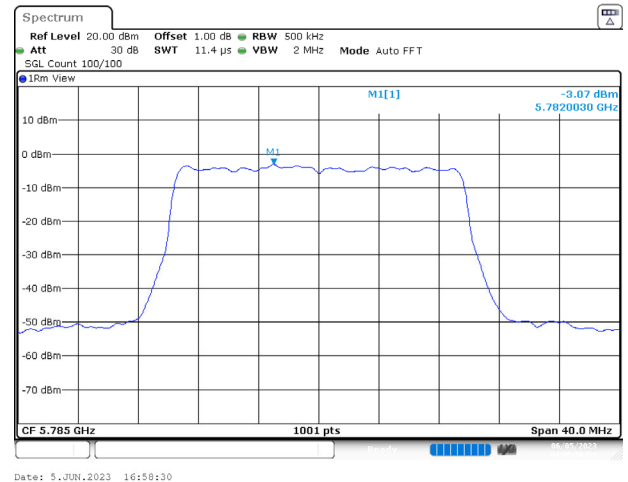

Product : Mobile Computer  
 Test Item : Peak Power Spectral Density  
 Test Mode : Transmit (802.11ax-40 MHz)  
 Test Date : 2023/06/05

Channel No.	Frequency (MHz)	Data Rate	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
38	5190	MCS0	A	-3.43	0.24	-0.18	<11	Pass
			B	-2.86	0.24	0.39		Pass
46	5230	MCS0	A	-3.20	0.24	0.05	<11	Pass
			B	-2.33	0.24	0.92		Pass
54	5270	MCS0	A	-4.84	0.24	-1.59	<11	Pass
			B	-3.46	0.24	-0.21		Pass
62	5310	MCS0	A	-4.14	0.24	-0.89	<11	Pass
			B	-2.72	0.24	0.53		Pass
102	5510	MCS0	A	-2.41	0.24	0.84	<11	Pass
			B	3.02	0.24	6.27		Pass
110	5550	MCS0	A	-2.83	0.24	0.42	<11	Pass
			B	-2.94	0.24	0.31		Pass
134	5670	MCS0	A	-3.50	0.24	-0.25	<11	Pass
			B	-4.69	0.24	-1.44		Pass

Note:

1. Total PSD/MHz = PSD/MHz + 10\*log 2 (two antennas)+Duty factor.
2. The quantity 10\*log 2 (two antennas) is added to the spectrum peak value according to document 662911 D01.




Channel No.	Frequency (MHz)	Data Rate	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
151	5755	MCS0	A	-5.88	0.24	-2.63	<30	Pass
			B	-6.96	0.24	-3.71		Pass
159	5795	MCS0	A	-5.49	0.24	-2.24	<30	Pass
			B	-6.07	0.24	-2.82		Pass


Note:

1. Total PSD/MHz = PSD/MHz + 10\*log 2 (two antennas)+Duty factor.
2. The quantity 10\*log 2 (two antennas) is added to the spectrum peak value according to document 662911 D01.

Channel 46

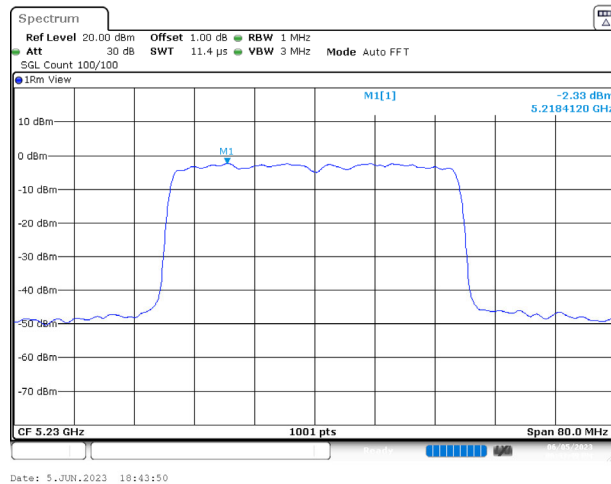

Channel 159

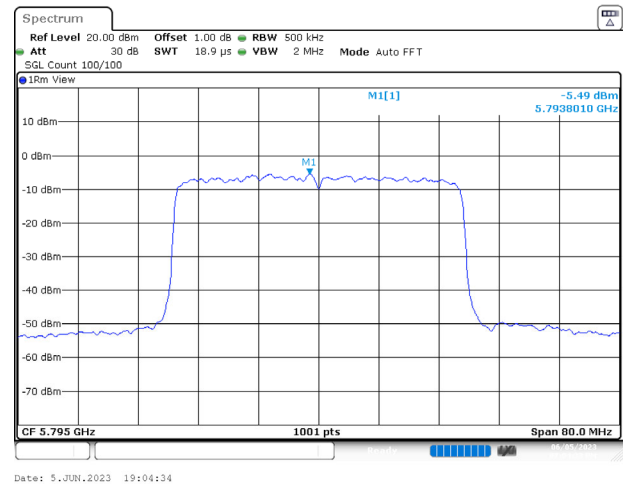

Product : Mobile Computer  
 Test Item : Peak Power Spectral Density  
 Test Mode : Transmit (802.11ax-80 MHz)  
 Test Date : 2023/06/05

Channel No.	Frequency (MHz)	Data Rate	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
42	5210	MCS0	A	-6.72	0.47	-3.24	<11	Pass
			B	-5.31	0.47	-1.83		Pass
58	5290	MCS0	A	-7.51	0.47	-4.03	<11	Pass
			B	-5.37	0.47	-1.89		Pass
106	5530	MCS0	A	-6.10	0.47	-2.62	<11	Pass
			B	-5.84	0.47	-2.36		Pass
122	5610	MCS0	A	-6.17	0.47	-2.69	<11	Pass
			B	-6.60	0.47	-3.12		Pass

Note:


1. Total PSD/MHz = PSD/MHz +10\*log 2 (two antennas)+Duty factor.
2. The quantity 10\*log 2 (two antennas) is added to the spectrum peak value according to document 662911 D01.

Channel No.	Frequency (MHz)	Data Rate	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
155	5775	MCS0	A	-9.02	0.47	-5.54	<30	Pass
			B	-9.39	0.47	-5.91		Pass

Note:


1. Total PSD/MHz = PSD/MHz +10\*log 2 (two antennas)+Duty factor.
2. The quantity 10\*log 2 (two antennas) is added to the spectrum peak value according to document 662911 D01.

## Channel 42

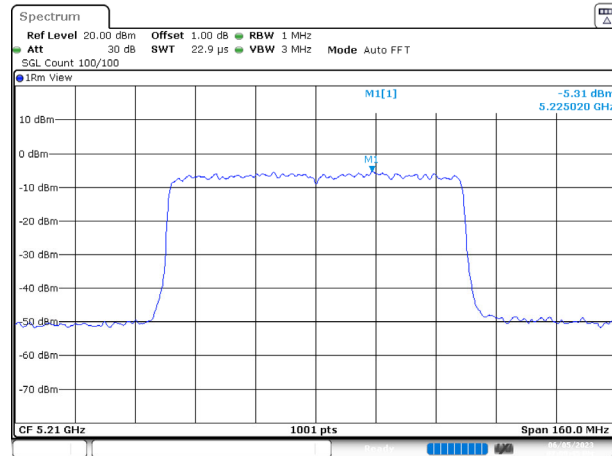

Date: 5.JUN.2023 19:09:46

## Channel 155

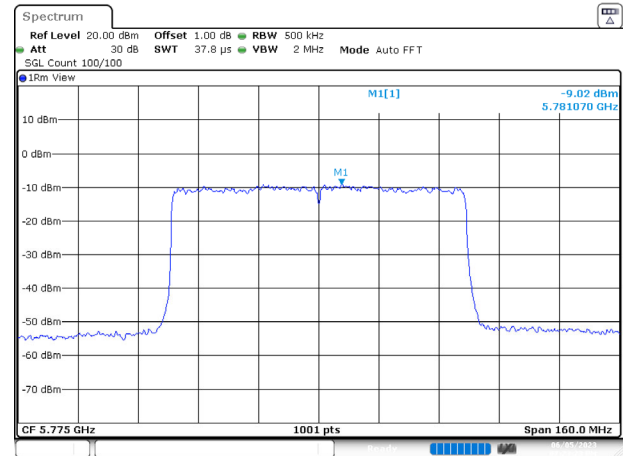


Date: 5.JUN.2023 19:23:23


## 5. Radiated Emission

### 5.1. Test Setup


#### Radiated Emission Under 30 MHz

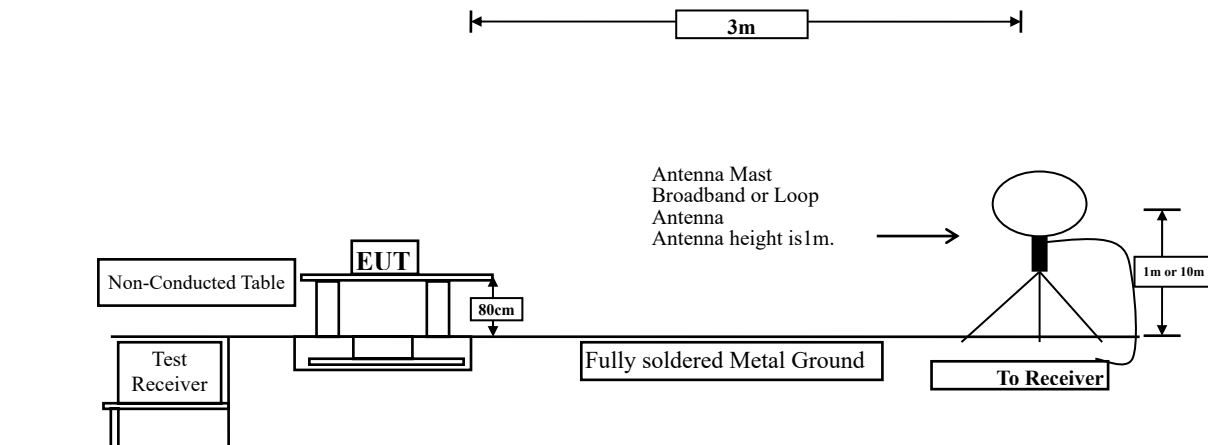

#### Radiated Emission Below 1 GHz

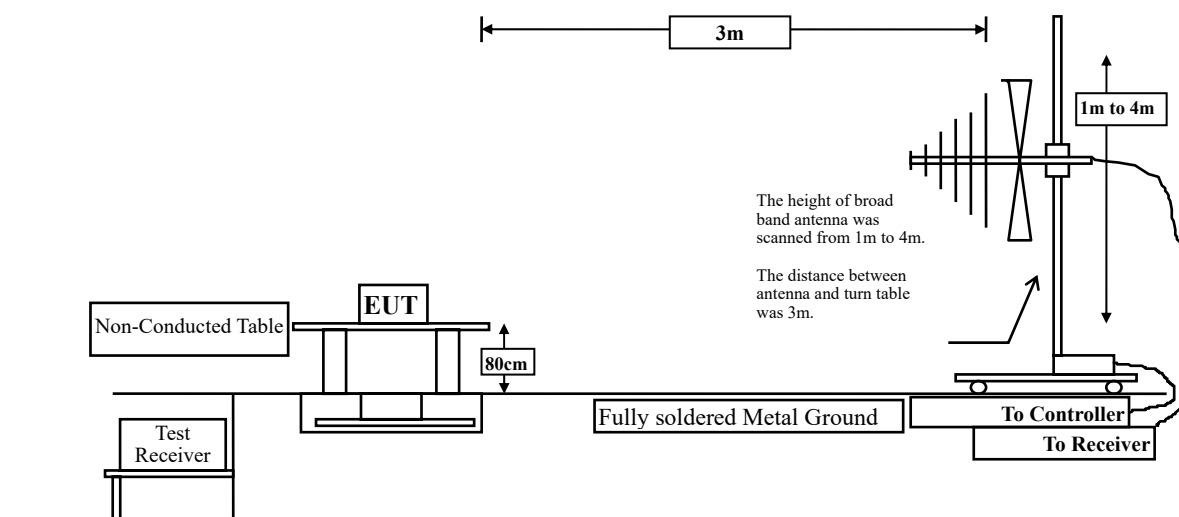

#### Radiated Emission Above 1 GHz

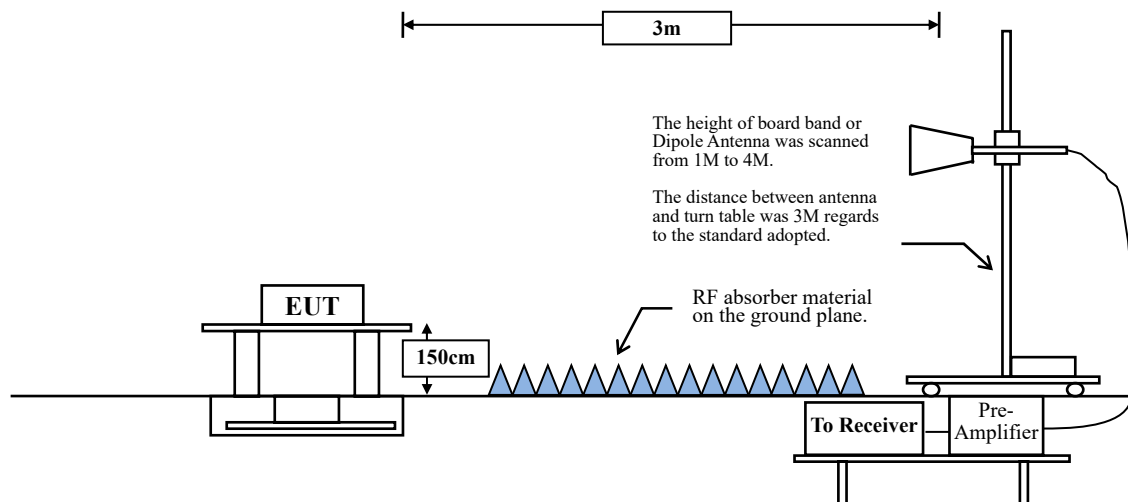

## 5.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks:  $E \text{ field strength (dB}\mu\text{V/m)} = 20 \log E \text{ field strength (}\mu\text{V/m)}$

- For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- For transmitters operating in the 5.725-5.85 GHz band:  
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Based on ANSI C63.10-2013 Section 12.7.3 d) provides the conversion formula between field strength and EIRP, if distance is 3m, -27dBm is equivalent to 68.22dBuV/m.

### 5.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to FCC KDB-789033 test procedure for compliance to FCC 47CFR 15. 407 requirements.

Measuring the frequency range below 1 GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1 GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30 MHz setting on the field strength meter is 9kHz and 30 MHz~1 GHz is 120 kHz and above 1 GHz is 1 MHz.

Radiated emission measurements below 30 MHz are made using Loop Antenna and 30 MHz~1 GHz are made using broadband Bilog antenna and above 1 GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9 kHz - 10th Harmonic of fundamental was investigated.

#### **RBW and VBW Parameter setting:**

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz.

RBW = 1 MHz.

VBW  $\geq$  3 MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz.

RBW = 1 MHz.

VBW = 10 Hz, when duty cycle  $\geq$  98 %


VBW  $\geq$  1/T, when duty cycle < 98 %

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


5 GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11a	92.81	1.4200	704	1000
802.11ax-20 MHz	97.00	3.8800	258	300
802.11ax-40 MHz	94.71	1.9700	508	1000
802.11ax-80 MHz	89.81	0.9700	1031	2000

Note: Duty Cycle Refer to Section 8.

## 5.4. Test Result of Radiated Emission

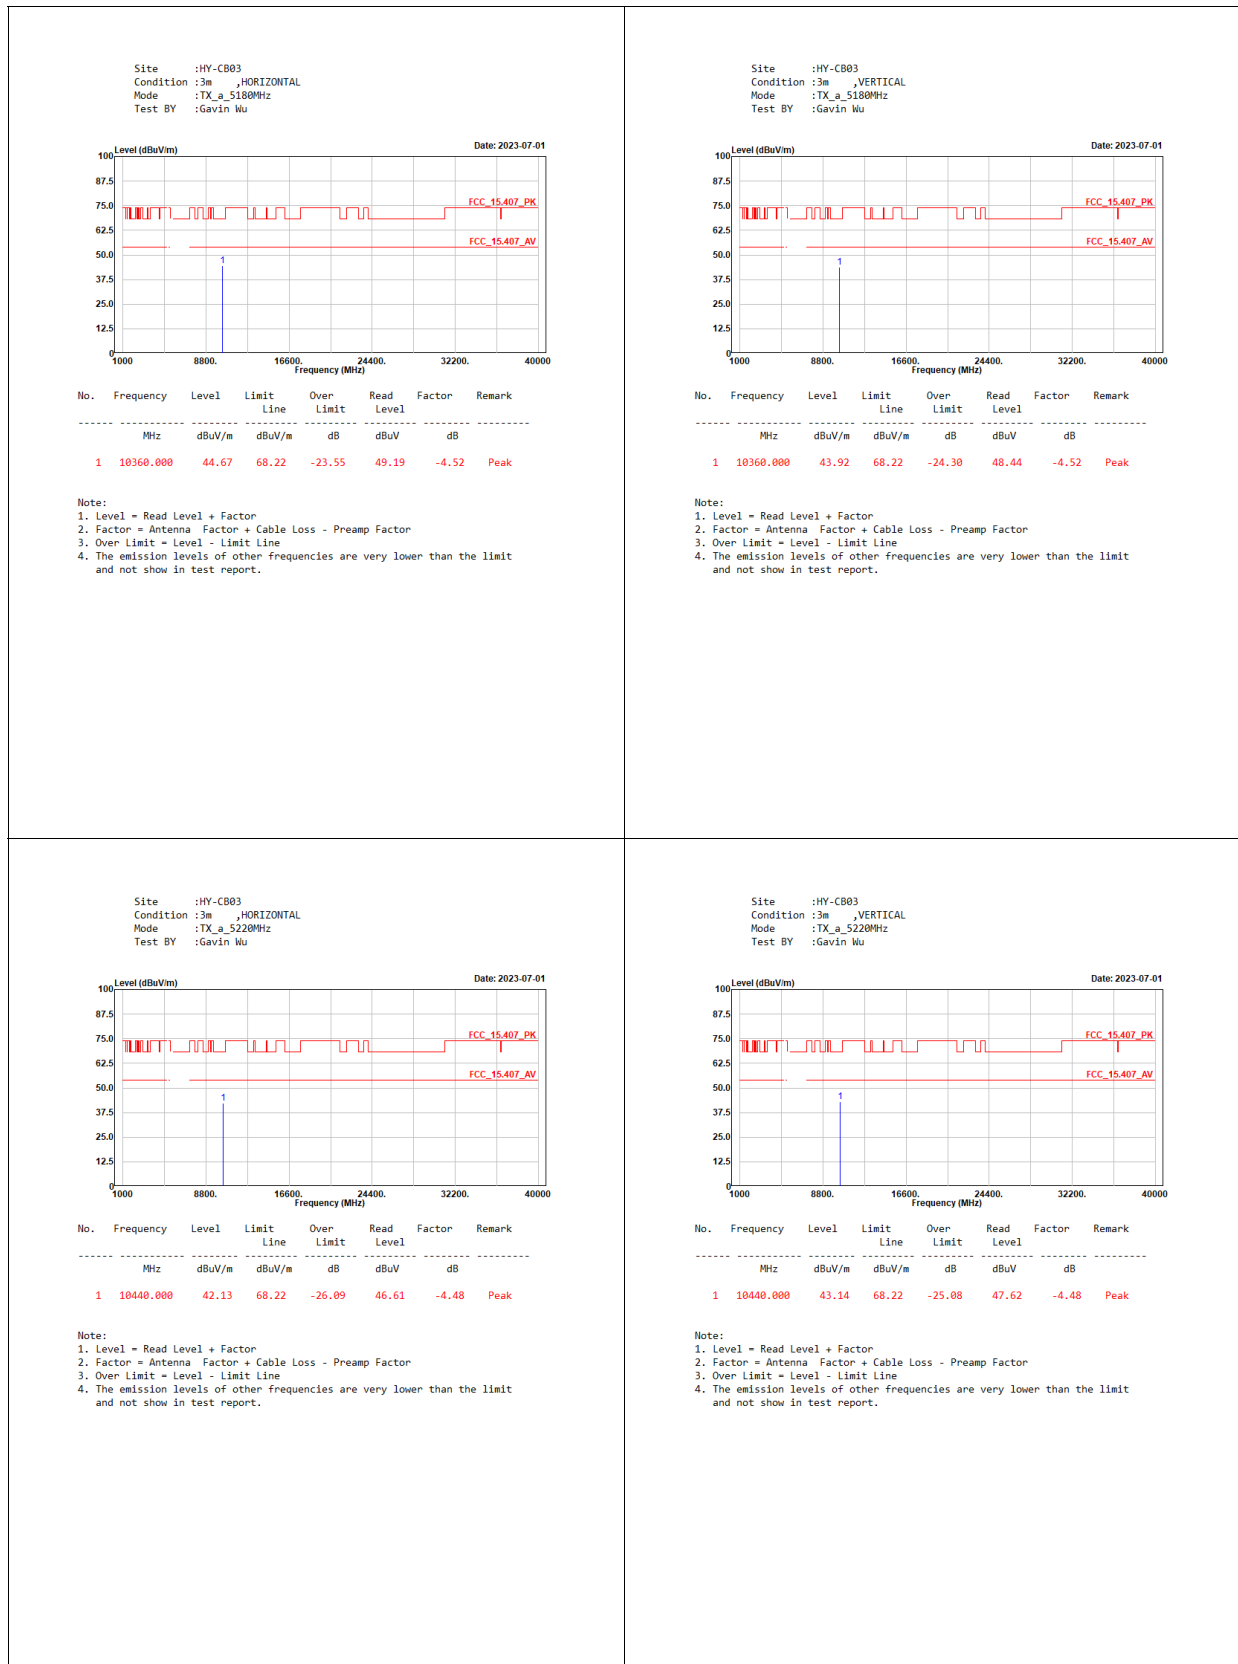


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_a\_5240MHz  
Test BY :Gavin Wu

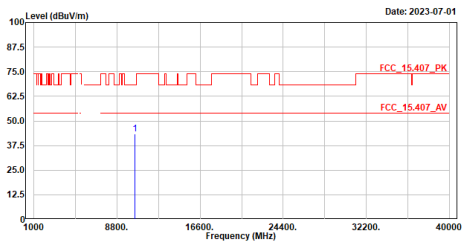

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10480.000	43.55	68.22	-24.67	47.89	-4.34	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_a\_5240MHz  
Test BY :Gavin Wu

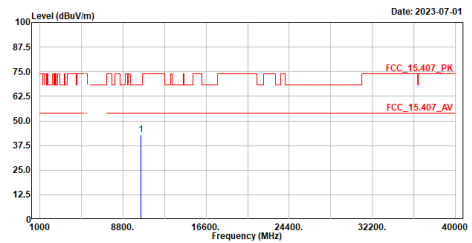

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10480.000	43.14	68.22	-25.08	47.48	-4.34	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_a\_5260MHz  
Test BY :Gavin Wu

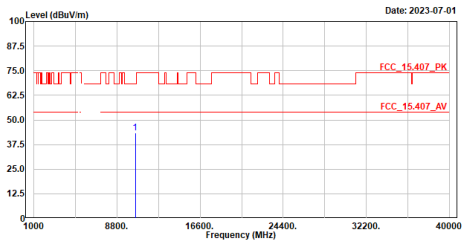

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10520.000	43.31	68.22	-24.91	47.48	-4.17	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_a\_5260MHz  
Test BY :Gavin Wu

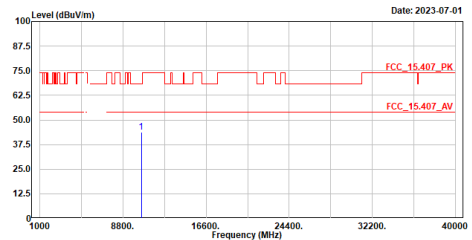


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10520.000	43.95	68.22	-24.27	48.12	-4.17	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_a\_5380MHz  
Test BY :Gavin Wu

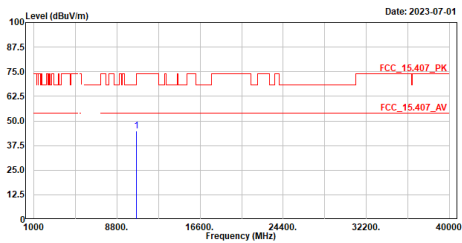


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10600.000	45.05	74.00	-28.95	48.56	-3.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_a\_5380MHz  
Test BY :Gavin Wu

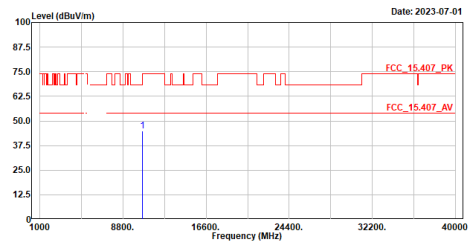


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10600.000	44.73	74.00	-29.27	48.24	-3.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_a\_5320MHz  
Test BY :Gavin Wu

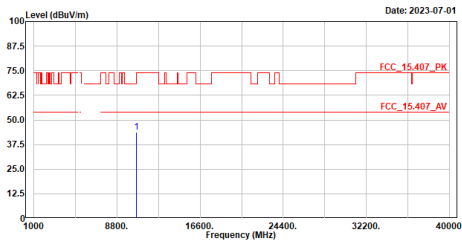


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10640.000	43.95	74.00	-30.05	47.70	-3.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_a\_5320MHz  
Test BY :Gavin Wu

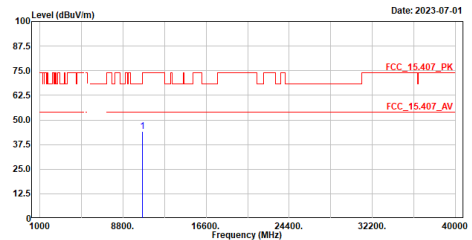


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10640.000	44.25	74.00	-29.75	48.00	-3.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_a\_5580MHz  
Test BY :Gavin Wu

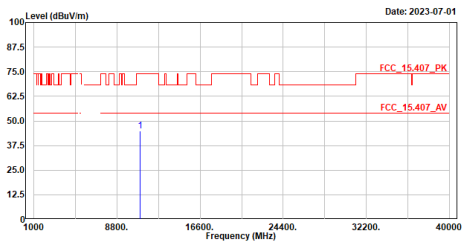


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11000.000	44.73	74.00	-29.27	47.35	-2.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_a\_5580MHz  
Test BY :Gavin Wu

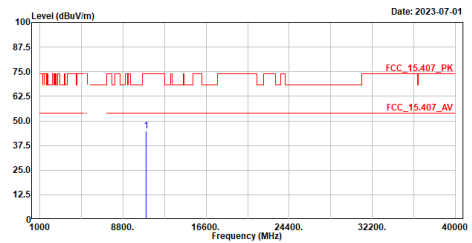


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11000.000	45.07	74.00	-28.93	47.69	-2.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_a\_5580MHz  
Test BY :Gavin Wu

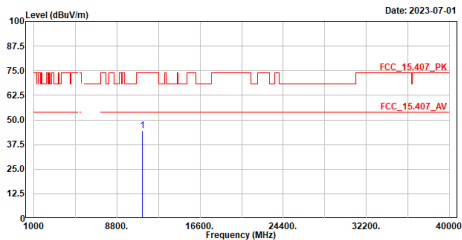


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11160.000	44.71	74.00	-29.29	47.26	-2.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_a\_5580MHz  
Test BY :Gavin Wu

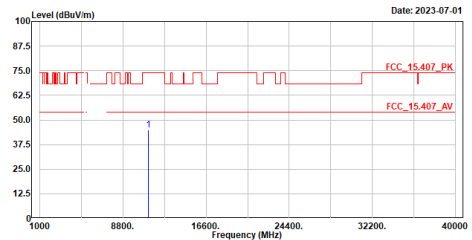


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11160.000	45.00	74.00	-29.00	47.55	-2.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_a\_5780MHz  
Test BY :Gavin Wu

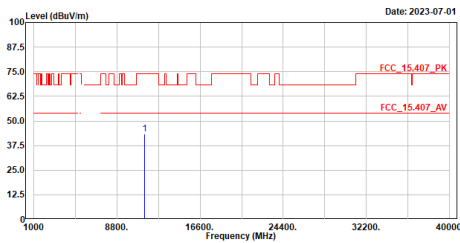

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11400.000	43.40	74.00	-30.60	45.25	-1.85	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_a\_5780MHz  
Test BY :Gavin Wu

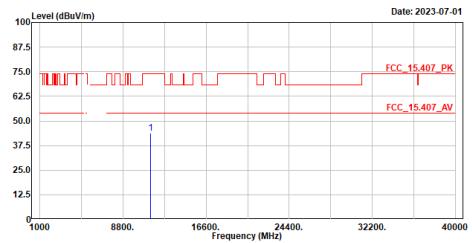

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11400.000	43.69	74.00	-30.31	45.54	-1.85	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_a\_5745MHz  
Test BY :Gavin Wu

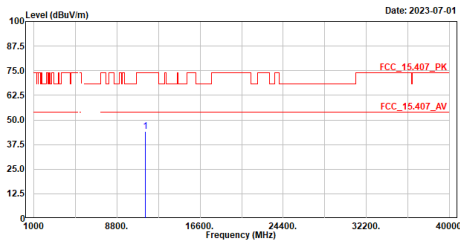

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11490.000	44.03	74.00	-29.97	46.13	-2.10	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_a\_5745MHz  
Test BY :Gavin Wu

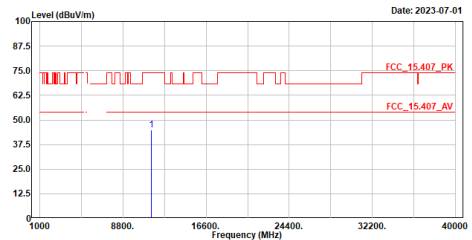

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11490.000	45.05	74.00	-28.95	47.15	-2.10	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_a\_5785MHz  
Test BY :Gavin Wu

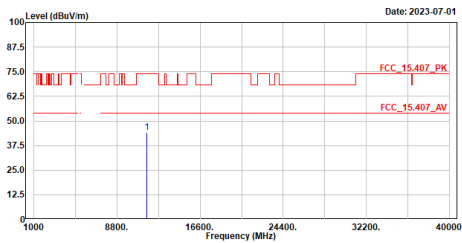


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11570.000	44.03	74.00	-29.97	45.88	-1.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_a\_5785MHz  
Test BY :Gavin Wu

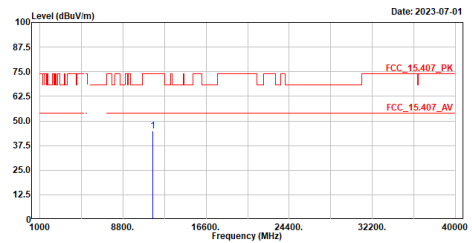


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11570.000	44.72	74.00	-29.28	46.57	-1.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_a\_5825MHz  
Test BY :Gavin Wu

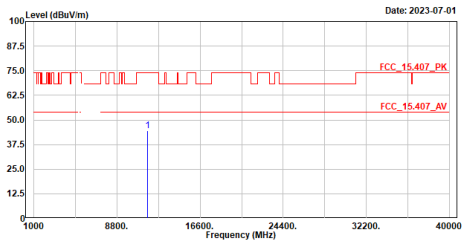


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11650.000	44.47	74.00	-29.53	46.39	-1.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_a\_5825MHz  
Test BY :Gavin Wu

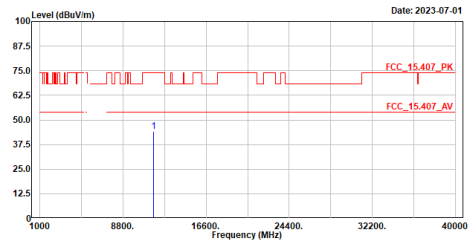


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11650.000	43.98	74.00	-30.02	45.90	-1.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax20\_5180MHz  
Test BY :Peter

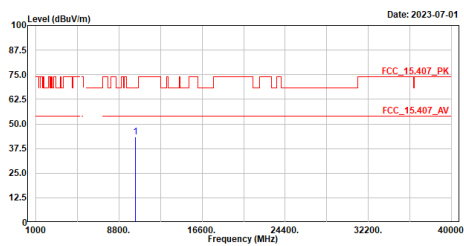

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10360.000	43.38	68.22	-24.84	47.90	-4.52	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax20\_5180MHz  
Test BY :Peter

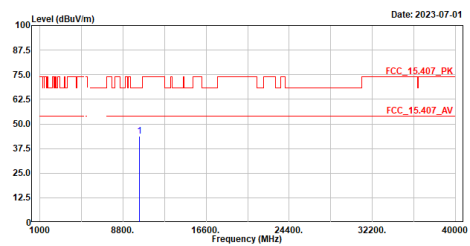

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10360.000	43.82	68.22	-24.40	48.34	-4.52	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax20\_5220MHz  
Test BY :Peter

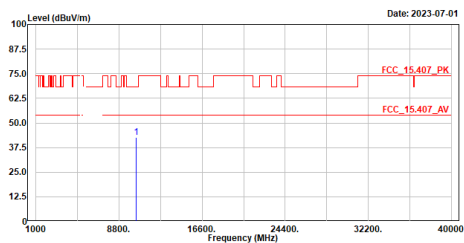

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10440.000	42.59	68.22	-25.63	47.07	-4.48	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax20\_5220MHz  
Test BY :Peter

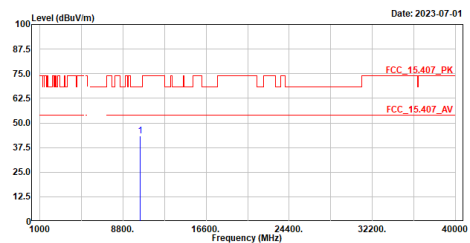

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10440.000	43.26	68.22	-24.96	47.74	-4.48	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax20\_5240MHz  
Test BY :Peter

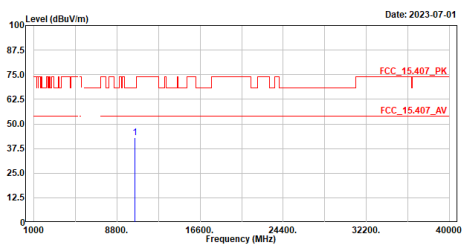

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10488.000	43.03	68.22	-25.19	47.37	-4.34	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax20\_5240MHz  
Test BY :Peter

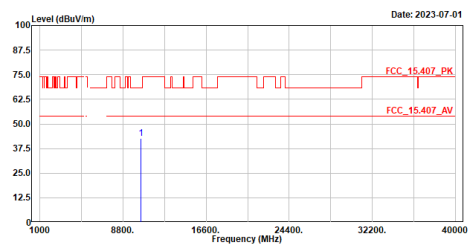

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10488.000	42.73	68.22	-25.49	47.07	-4.34	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax20\_5260MHz  
Test BY :Peter

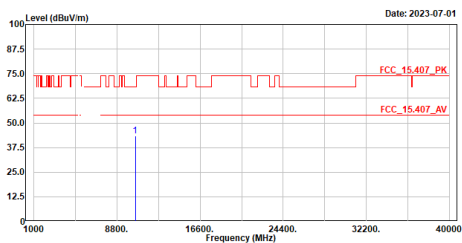

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10520.000	43.42	68.22	-24.80	47.59	-4.17	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax20\_5260MHz  
Test BY :Peter

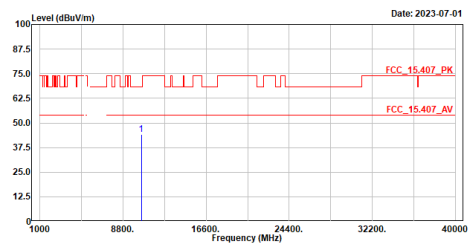

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10520.000	44.20	68.22	-24.02	48.37	-4.17	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax20\_5300MHz  
Test BY :Peter

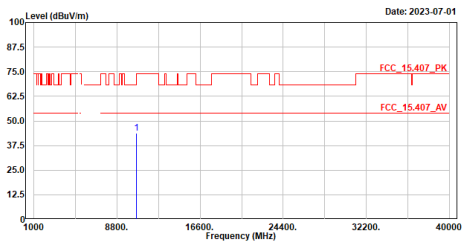


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10600.000	43.66	74.00	-30.34	47.17	-3.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax20\_5300MHz  
Test BY :Peter

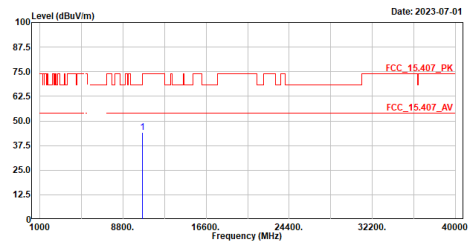


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10600.000	44.02	74.00	-29.98	47.53	-3.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax20\_5320MHz  
Test BY :Peter

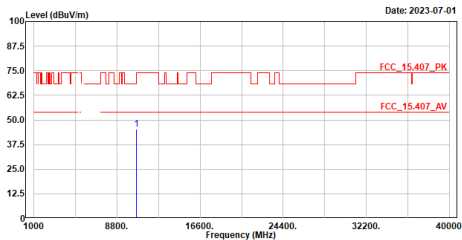


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10640.000	45.15	74.00	-28.85	48.90	-3.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax20\_5320MHz  
Test BY :Peter

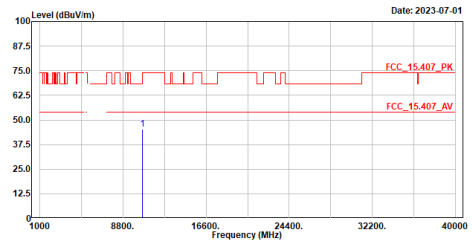


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10640.000	45.14	74.00	-28.86	48.89	-3.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax20\_5580MHz  
Test BY :Peter

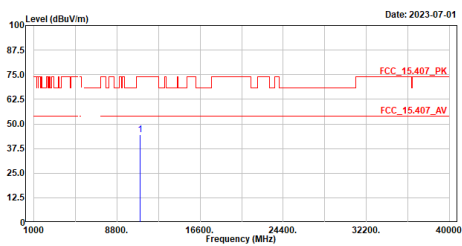

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11000.000	44.55	74.00	-29.45	47.17	-2.62	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax20\_5580MHz  
Test BY :Peter

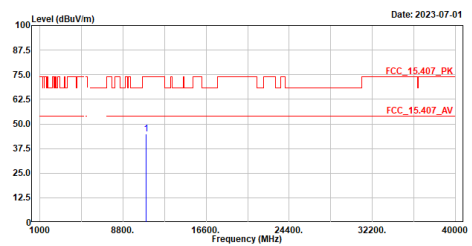

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11000.000	44.87	74.00	-29.13	47.49	-2.62	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax20\_5580MHz  
Test BY :Peter

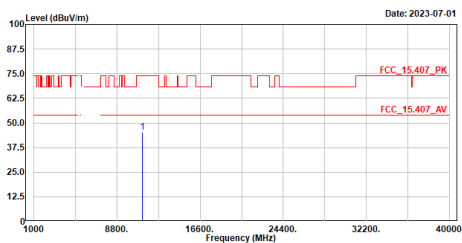

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11160.000	45.33	74.00	-28.67	47.88	-2.55	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax20\_5580MHz  
Test BY :Peter

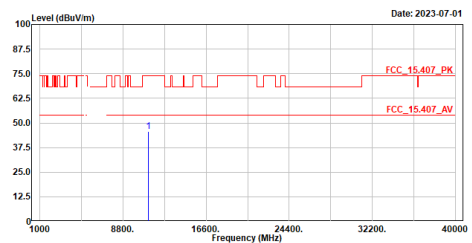


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11160.000	45.77	74.00	-28.23	48.32	-2.55	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.




Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax20\_5700MHz  
Test BY :Peter

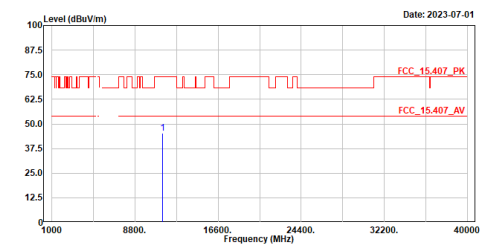

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11400.000	45.46	74.00	-28.54	47.31	-1.85	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax20\_5700MHz  
Test BY :Peter

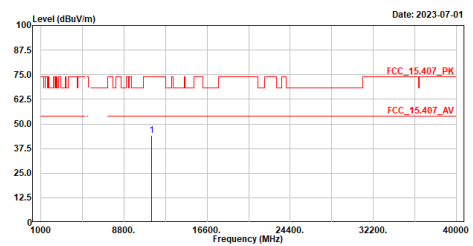

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11400.000	44.03	74.00	-29.97	45.88	-1.85	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax20\_5745MHz  
Test BY :Peter

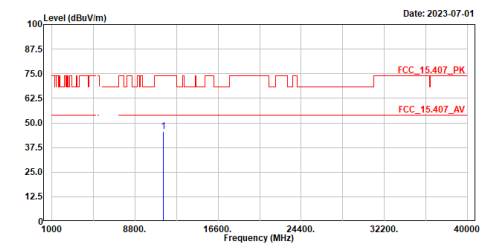

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11490.000	45.54	74.00	-28.46	47.64	-2.10	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax20\_5745MHz  
Test BY :Peter

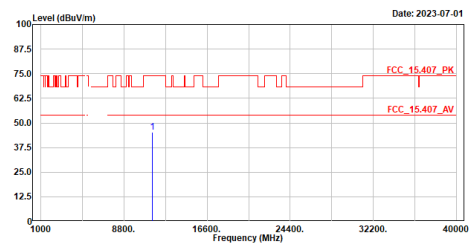

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11490.000	45.14	74.00	-28.86	47.24	-2.10	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax20\_5785MHz  
Test BY :Peter

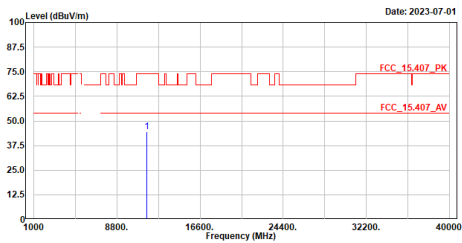


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11570.000	44.71	74.00	-29.29	46.56	-1.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax20\_5785MHz  
Test BY :Peter

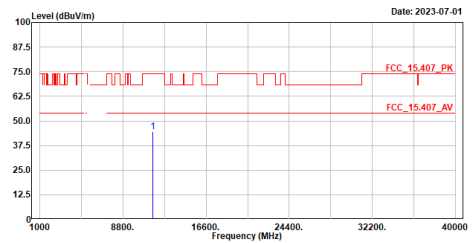


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11570.000	44.64	74.00	-29.36	46.49	-1.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax20\_5825MHz  
Test BY :Peter

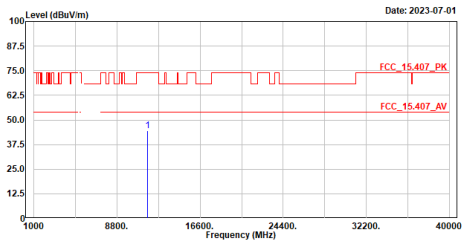


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11650.000	44.35	74.00	-29.65	46.27	-1.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax20\_5825MHz  
Test BY :Peter

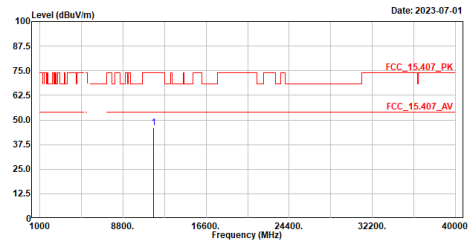


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11650.000	45.96	74.00	-28.04	47.88	-1.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax40\_5190MHz  
Test BY :Peter

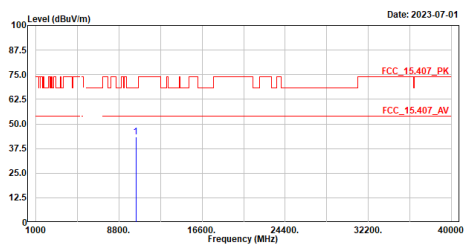

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10380.000	43.48	68.22	-24.74	47.97	-4.49	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax40\_5190MHz  
Test BY :Peter

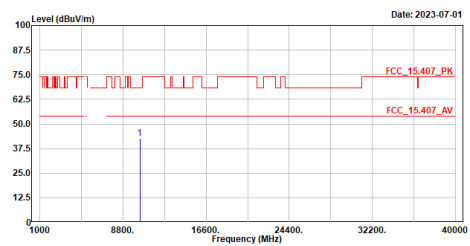

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10380.000	42.79	68.22	-25.43	47.28	-4.49	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax40\_5230MHz  
Test BY :Peter

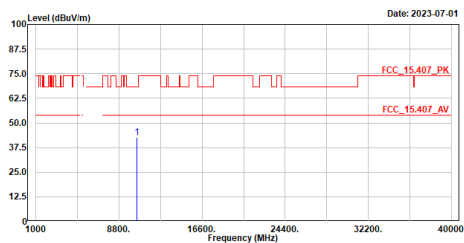

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10460.000	42.60	68.22	-25.62	47.84	-4.44	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax40\_5230MHz  
Test BY :Peter

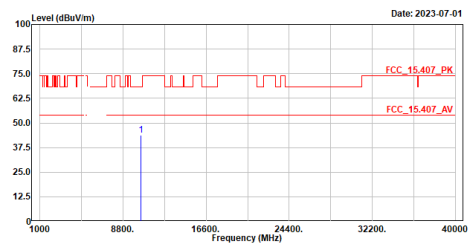

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10460.000	43.64	68.22	-24.58	48.08	-4.44	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax40\_5270MHz  
Test BY :Peter

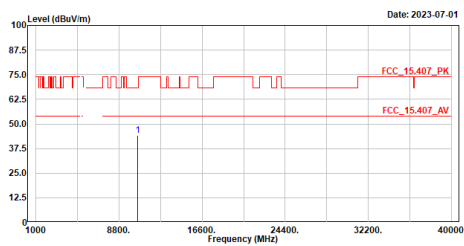

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10540.000	44.06	68.22	-24.16	48.04	-3.98	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax40\_5270MHz  
Test BY :Peter

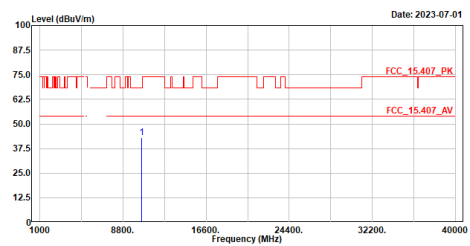

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10540.000	43.08	68.22	-25.14	47.06	-3.98	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax40\_5310MHz  
Test BY :Peter

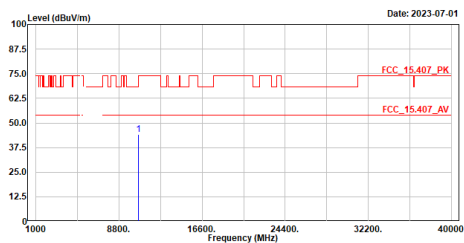

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10620.000	44.14	74.00	-29.86	47.73	-3.59	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax40\_5310MHz  
Test BY :Peter

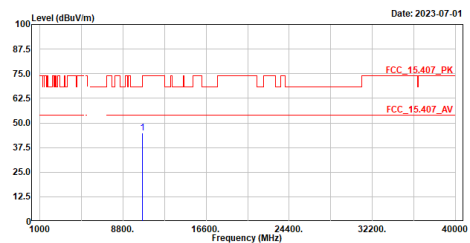

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10620.000	44.90	74.00	-29.10	48.49	-3.59	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax40\_5510MHz  
Test BY :Peter

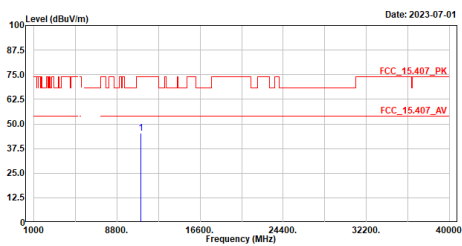

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11020.000	45.11	74.00	-28.89	47.77	-2.66	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax40\_5510MHz  
Test BY :Peter

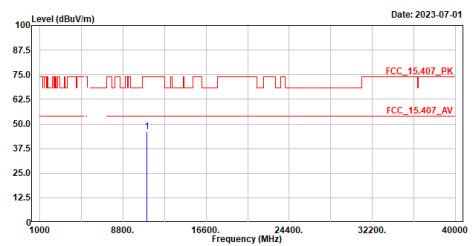

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11020.000	46.02	74.00	-27.98	48.68	-2.66	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax40\_5550MHz  
Test BY :Peter

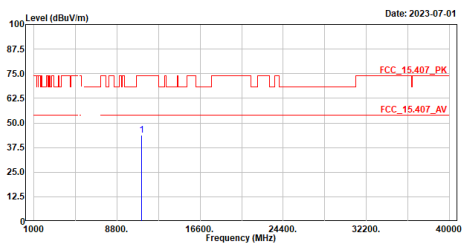

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11100.000	43.63	74.00	-30.37	46.42	-2.79	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax40\_5550MHz  
Test BY :Peter

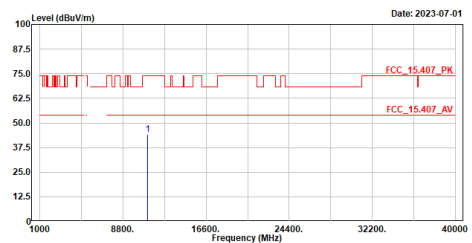

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11100.000	44.27	74.00	-29.73	47.06	-2.79	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax40\_5670MHz  
Test BY :Peter

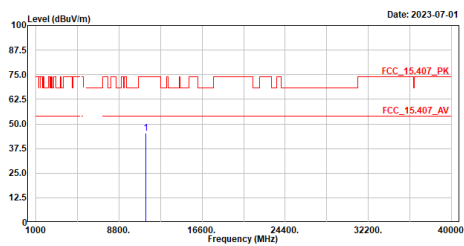

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11340.000	45.46	74.00	-28.54	47.56	-2.10	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax40\_5670MHz  
Test BY :Peter

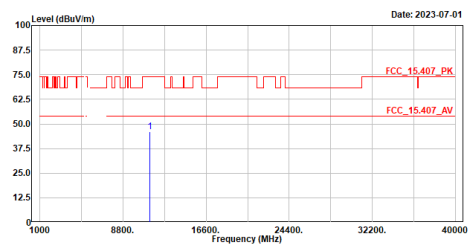

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11340.000	45.87	74.00	-28.13	47.97	-2.10	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax40\_5755MHz  
Test BY :Peter

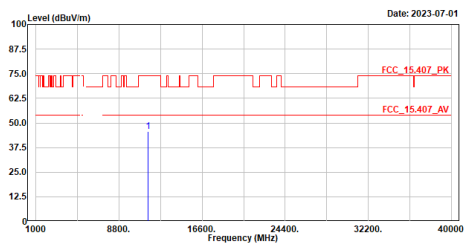

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11510.000	45.69	74.00	-28.31	47.69	-2.00	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax40\_5755MHz  
Test BY :Peter

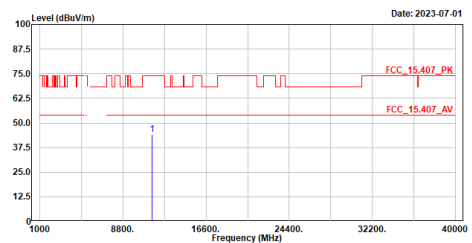

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11510.000	43.96	74.00	-30.04	45.96	-2.00	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax40\_5795MHz  
Test BY :Peter

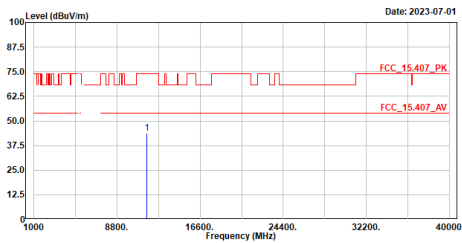

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11590.000	43.83	74.00	-30.17	45.74	-1.91	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax40\_5795MHz  
Test BY :Peter

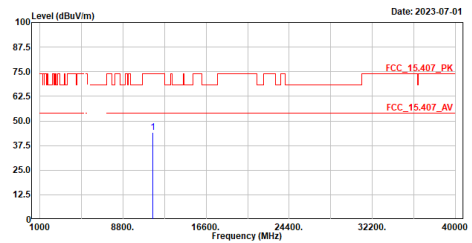

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11590.000	44.33	74.00	-29.67	46.24	-1.91	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax80\_5210MHz  
Test BY :Peter

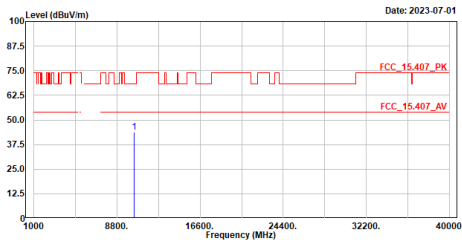

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	10420.000	43.78	68.22	-24.44	48.25	-4.47	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax80\_5210MHz  
Test BY :Peter

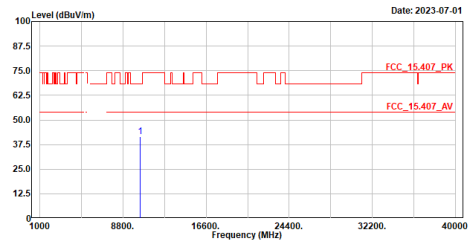

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	10420.000	41.68	68.22	-26.54	46.15	-4.47	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m HORIZONTAL  
Mode :TX\_ax80\_5290MHz  
Test BY :Peter

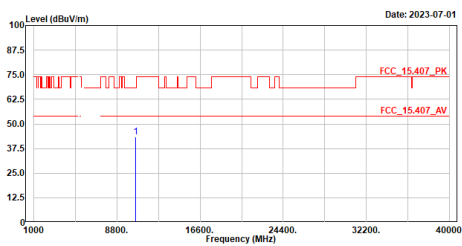

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10580.000	43.39	68.22	-24.83	47.06	-3.67	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m VERTICAL  
Mode :TX\_ax80\_5290MHz  
Test BY :Peter

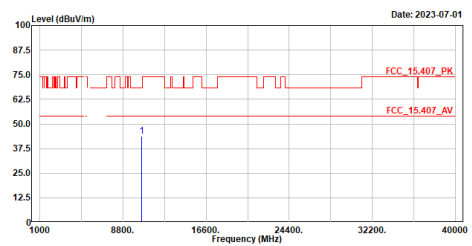

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10580.000	43.73	68.22	-24.49	47.40	-3.67	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m HORIZONTAL  
Mode :TX\_ax80\_5530MHz  
Test BY :Peter

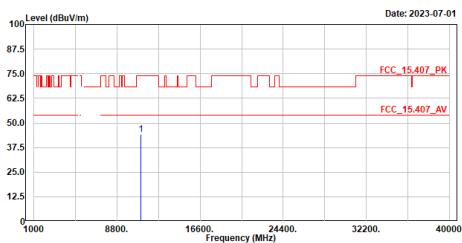

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11060.000	44.26	74.00	-29.74	47.03	-2.77	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m VERTICAL  
Mode :TX\_ax80\_5530MHz  
Test BY :Peter

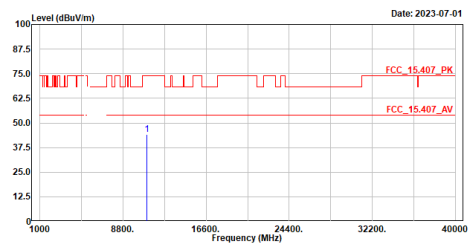


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11060.000	43.97	74.00	-30.03	46.74	-2.77	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.




Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax80\_5610MHz  
Test BY :Peter

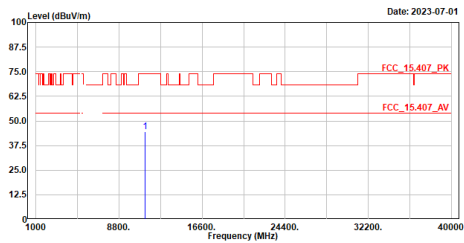

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11228.000	44.59	74.00	-29.41	47.01	-2.42	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax80\_5610MHz  
Test BY :Peter

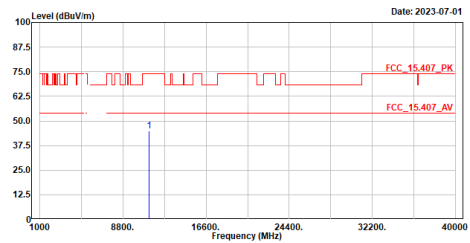

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11228.000	45.02	74.00	-28.98	47.44	-2.42	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax80\_5775MHz  
Test BY :Peter

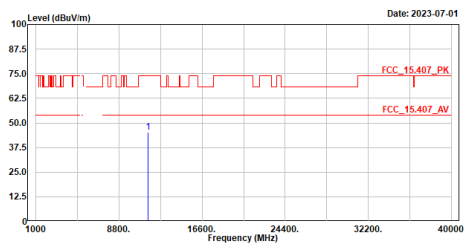

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11550.000	45.25	74.00	-28.75	47.04	-1.79	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax80\_5775MHz  
Test BY :Peter

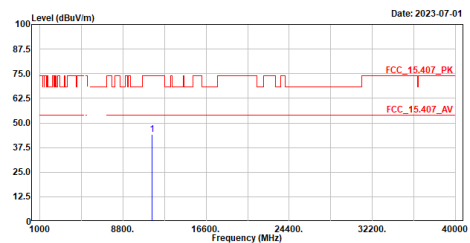

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11550.000	44.17	74.00	-29.83	45.96	-1.79	Peak


Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_ax80\_5775MHz  
Test BY :Peter

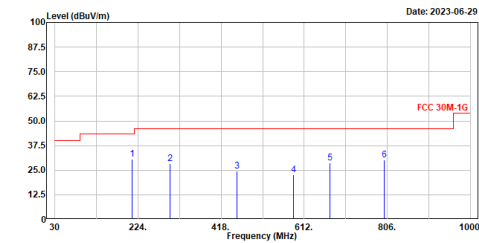

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_ax80\_5775MHz  
Test BY :Peter

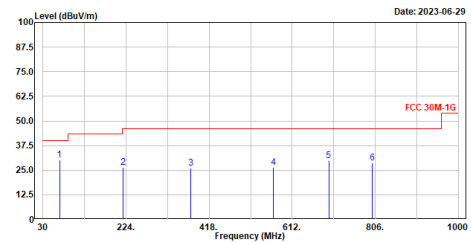


Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


## 6. Band Edge

### 6.1. Test Setup

RF Conducted Measurement:

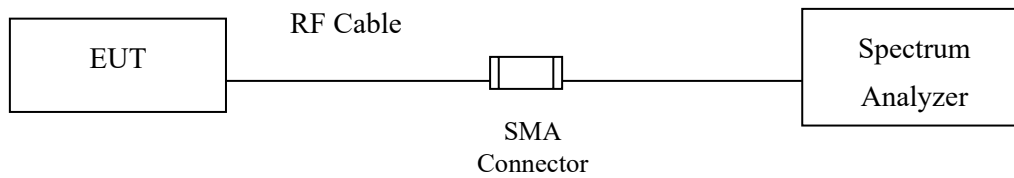

RF Radiated Measurement:

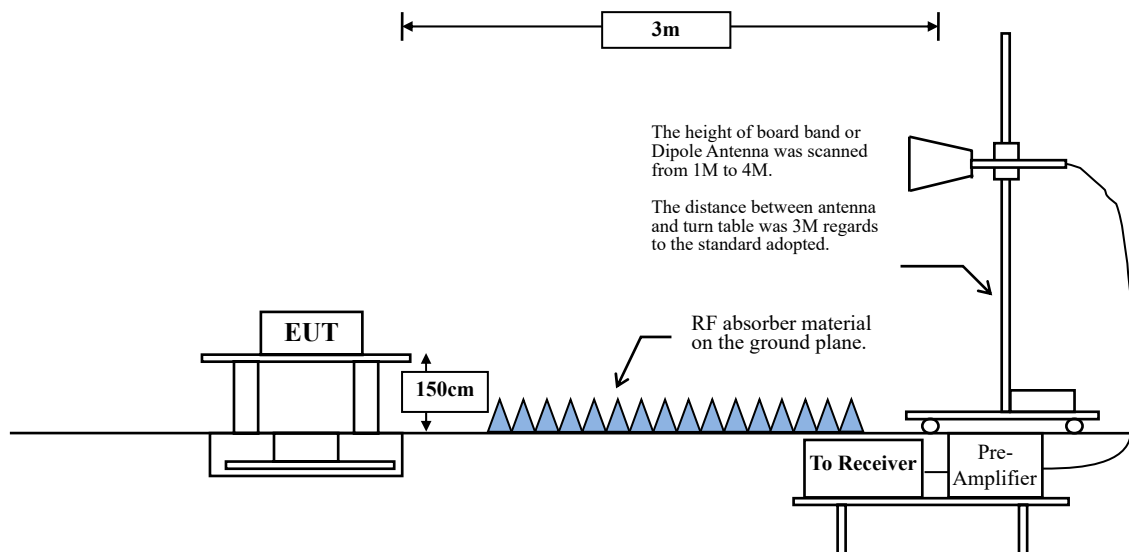

## 6.2. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section. Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	$\mu\text{V/m @3m}$	$\text{dB}\mu\text{V/m@3m}$
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage ( $\text{dB}\mu\text{V}$ ) =  $20 \log \text{RF Voltage } (\mu\text{V})$
  2. In the Above Table, the tighter limit applies at the band edges.
  3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27 \text{ dBm/MHz}$ .
  - For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27 \text{ dBm/MHz}$ .
  - For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27 \text{ dBm/MHz}$ .
  - For transmitters operating in the 5.725-5.85 GHz band:  
All emissions shall be limited to a level of  $-27 \text{ dBm/MHz}$  at 75 MHz or more above or below the band edge increasing linearly to  $10 \text{ dBm/MHz}$  at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of  $15.6 \text{ dBm/MHz}$  at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of  $27 \text{ dBm/MHz}$  at the band edge.
  - For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of  $-27 \text{ dBm/MHz}$ .

Based on ANSI C63.10-2013 Section 12.7.3 d) provides the conversion formula between field strength and EIRP, if distance is 3m,  $-27\text{dBm}$  is equivalent to  $68.22\text{dB}\mu\text{V/m}$ .

### 6.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated measurement.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz, above 1 GHz are 1 MHz.

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

#### **RBW and VBW Parameter setting:**

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz.

RBW = 1 MHz.

VBW  $\geq$  3 MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz.

RBW = 1 MHz.

VBW = 10 Hz, when duty cycle  $\geq$  98 %


VBW  $\geq$  1/T, when duty cycle < 98 %

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


5 GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11a	92.81	1.4200	704	1000
802.11ax-20 MHz	97.00	3.8800	258	300
802.11ax-40 MHz	94.71	1.9700	508	1000
802.11ax-80 MHz	89.81	0.9700	1031	2000

Note: Duty Cycle Refer to Section 8.

## 6.4. Test Result of Band Edge

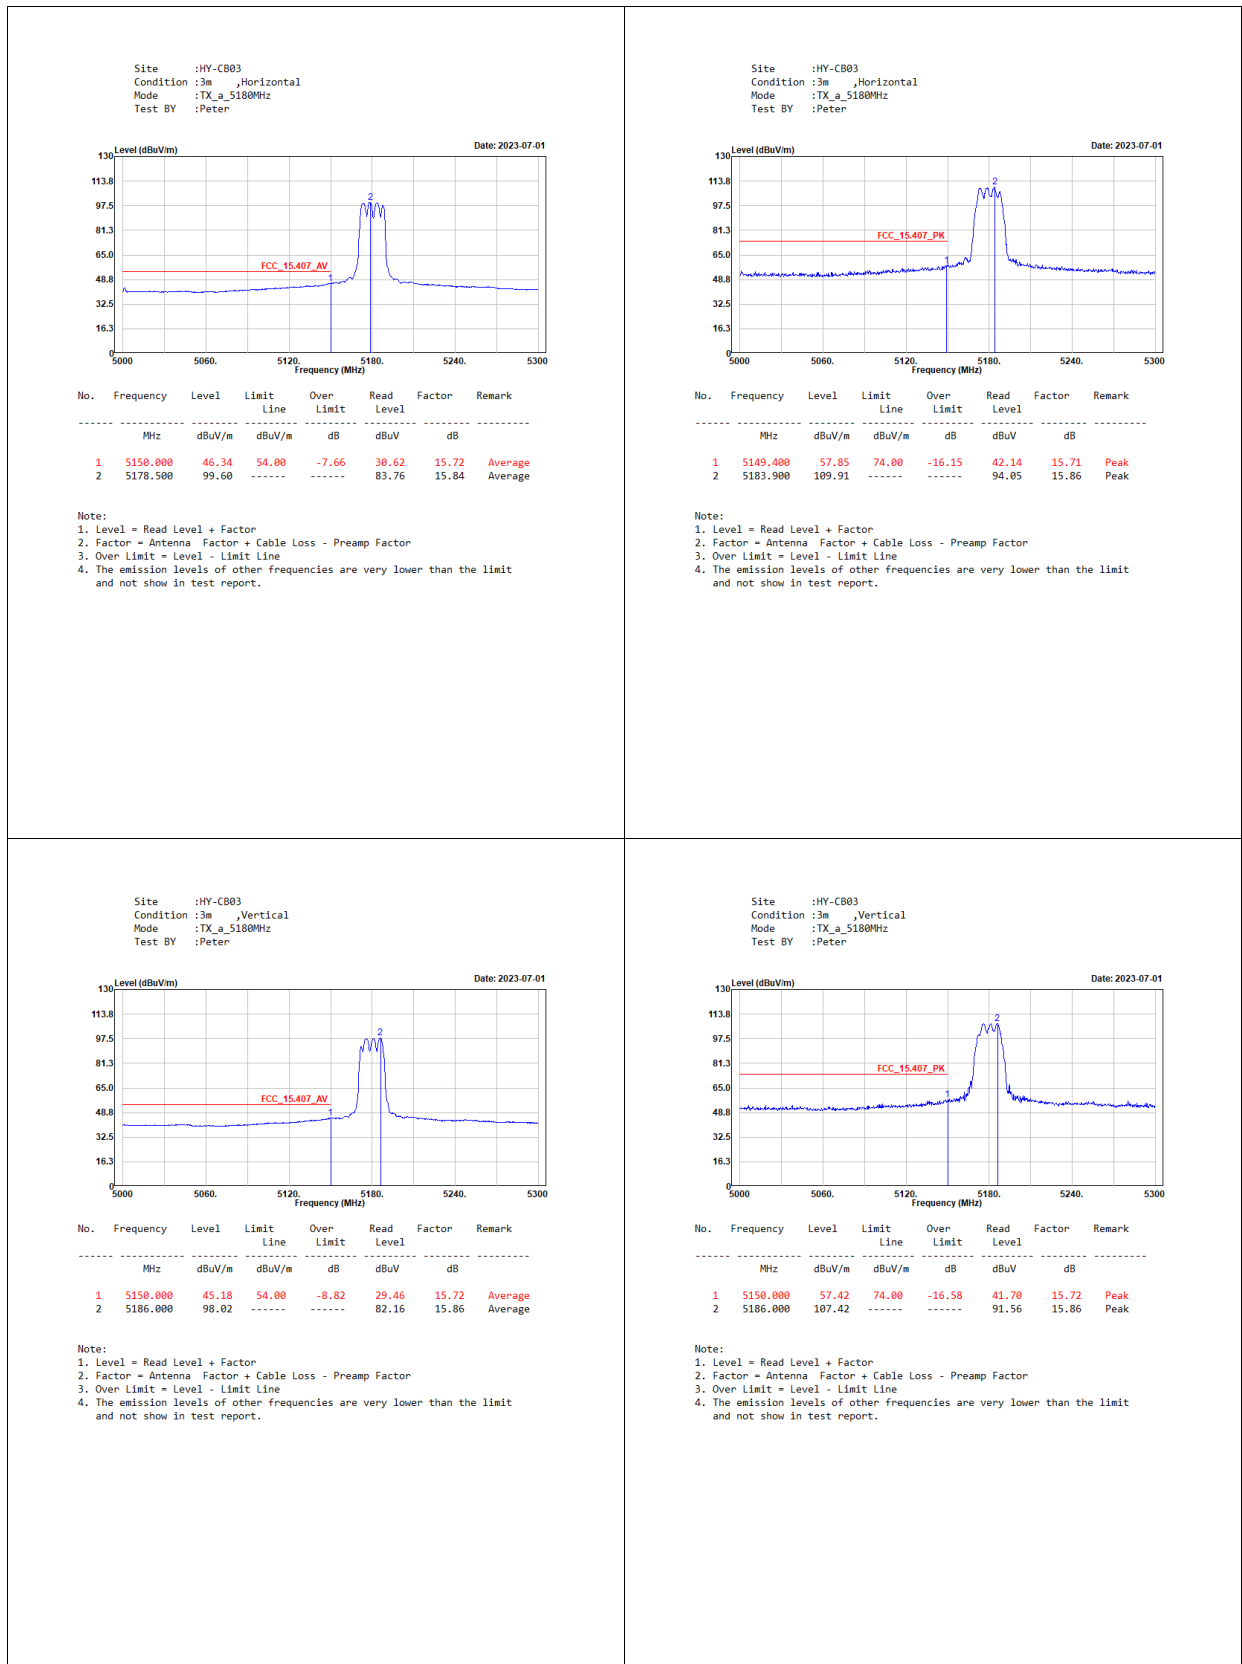

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_a\_5320MHz  
Test BY :Peter

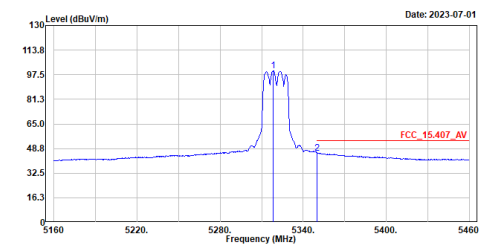


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5318.400	100.14	-----	-----	84.33	15.81	Average
2	5350.200	45.85	54.00	-8.15	30.00	15.85	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_a\_5320MHz  
Test BY :Peter

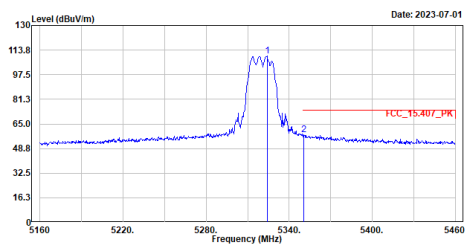


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5324.100	110.04	-----	-----	94.23	15.81	Peak
2	5350.500	58.05	74.00	-15.95	42.20	15.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_a\_5320MHz  
Test BY :Peter

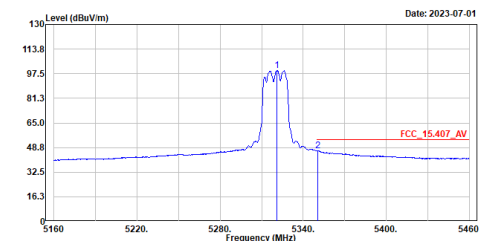


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5320.800	99.60	-----	-----	83.79	15.81	Average
2	5350.500	46.74	54.00	-7.26	30.89	15.85	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_a\_5320MHz  
Test BY :Peter

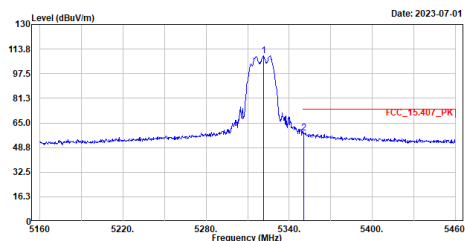


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5321.400	109.25	-----	-----	93.44	15.81	Peak
2	5350.500	58.60	74.00	-15.40	42.75	15.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_a\_5500MHz  
Test BY :Peter

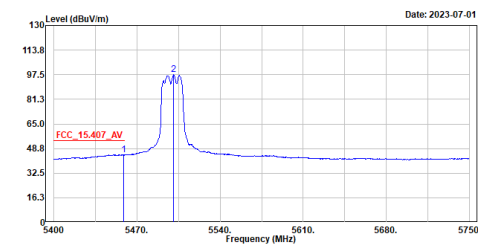

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5458.800	44.73	54.00	-9.27	28.53	16.20	Average
2	5500.800	97.46	-----	-----	81.05	16.41	Average

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_a\_5500MHz  
Test BY :Peter

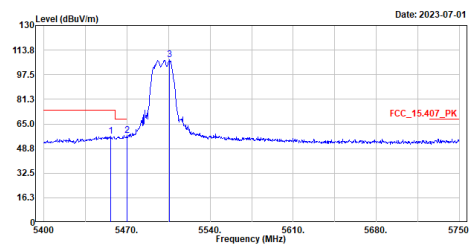

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5456.350	57.08	74.00	-16.92	40.89	16.19	Peak
2	5470.000	57.30	68.22	-10.92	41.04	16.26	Peak
3	5506.050	107.20	-----	-----	90.78	16.42	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_a\_5500MHz  
Test BY :Peter

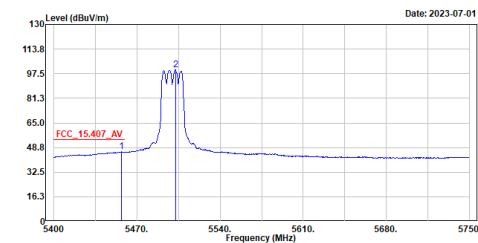

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5457.050	45.98	54.00	-8.02	29.79	16.19	Average
2	5502.550	99.99	-----	-----	83.57	16.42	Average

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_a\_5500MHz  
Test BY :Peter

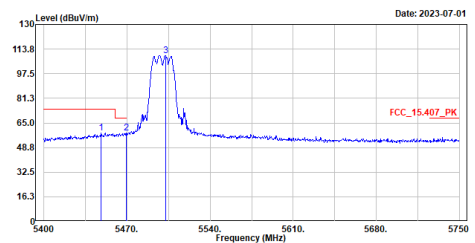


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5448.300	58.36	74.00	-15.64	42.22	16.14	Peak
2	5469.300	58.57	68.22	-9.65	42.31	16.26	Peak
3	5502.550	109.62	-----	-----	93.20	16.42	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



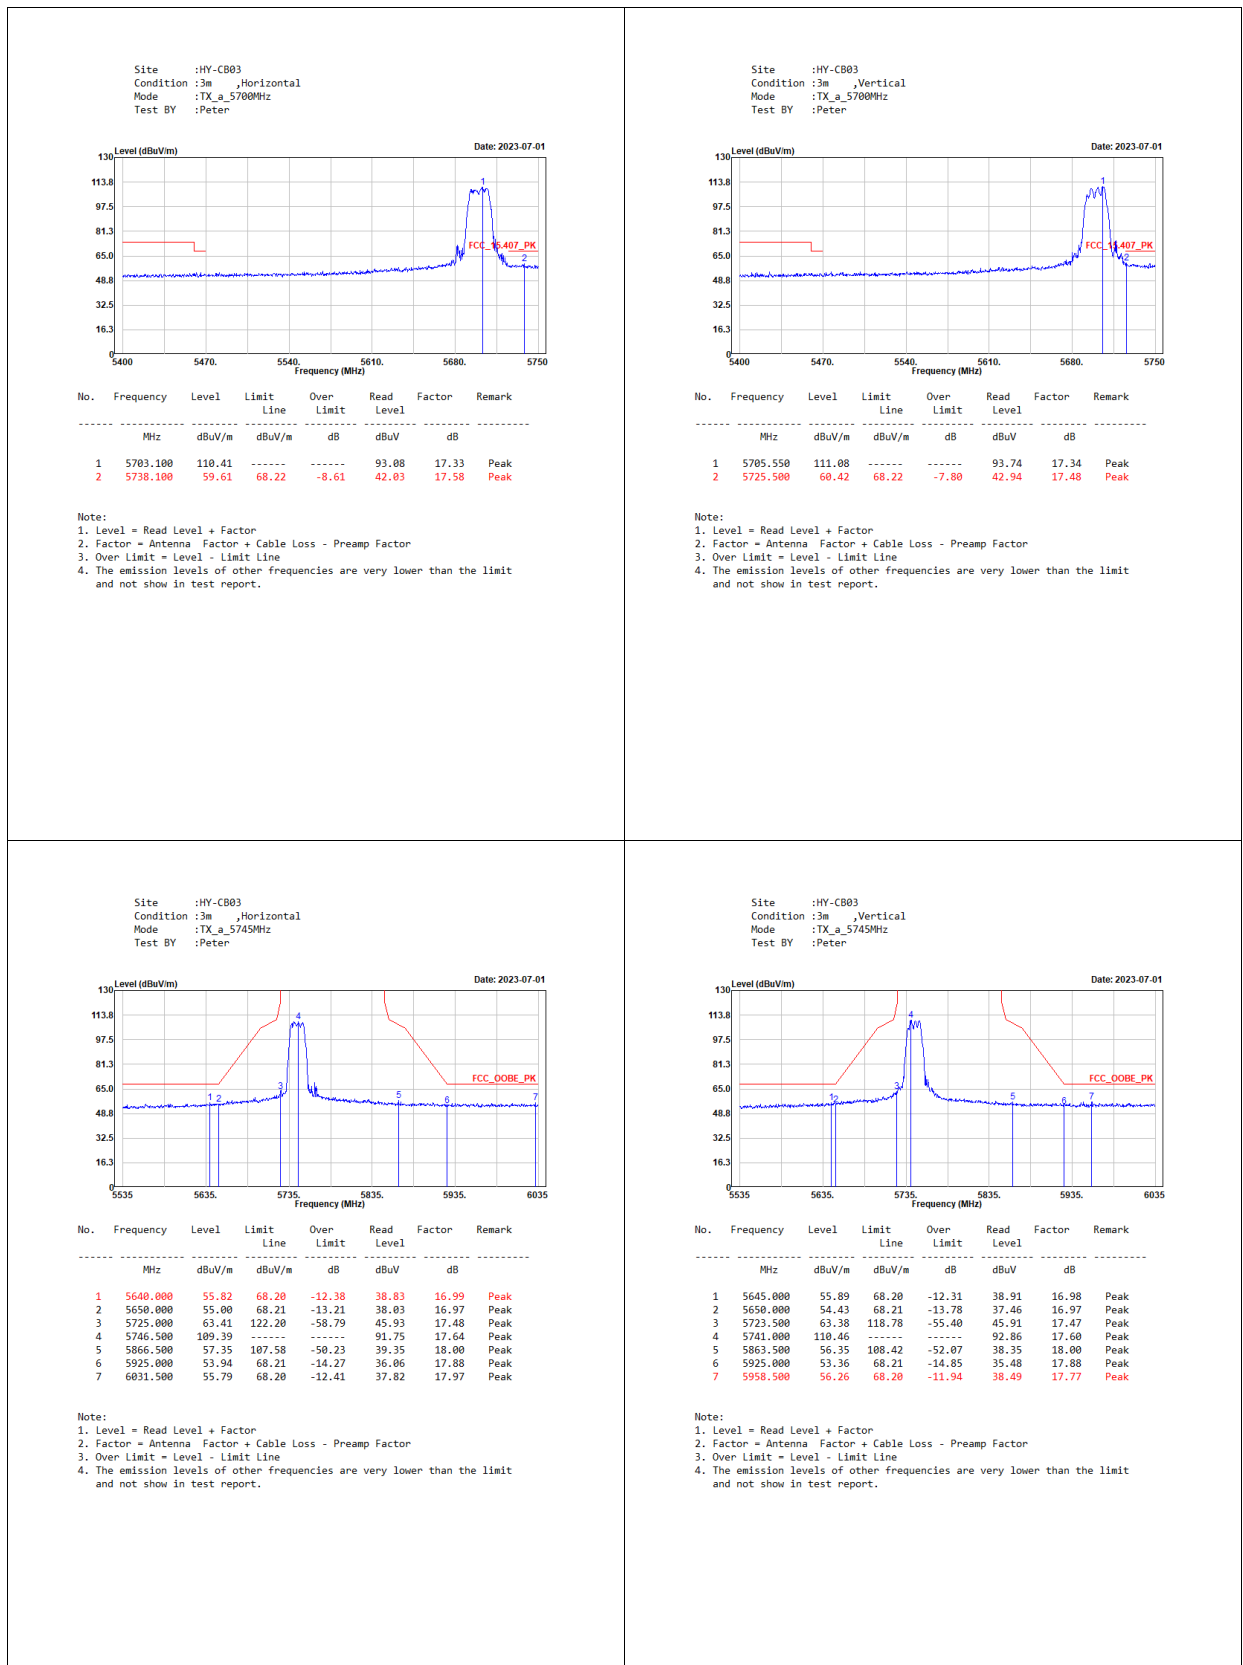

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_a\_5825MHz  
Test BY :Peter

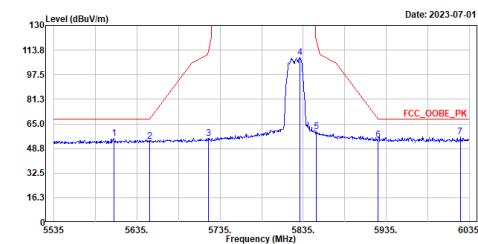


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5607.000	55.40	68.20	-12.80	38.35	17.05	Peak
2	5650.000	53.51	68.21	-14.70	36.54	16.97	Peak
3	5721.000	55.56	113.08	-57.52	38.10	17.46	Peak
4	5831.500	108.83	-----	-----	90.86	17.97	Peak
5	5851.000	59.66	119.92	-60.26	41.66	18.00	Peak
6	5925.000	54.52	68.21	-13.69	36.64	17.88	Peak
7	6024.000	56.54	68.20	-11.66	38.63	17.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_a\_5825MHz  
Test BY :Peter

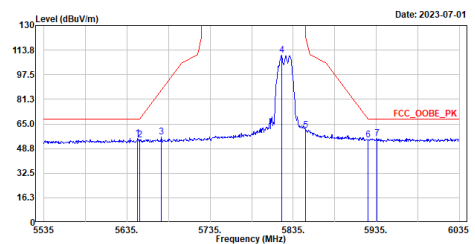


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5648.000	55.40	68.20	-12.80	38.42	16.98	Peak
2	5650.000	54.52	68.21	-13.69	37.55	16.97	Peak
3	5676.500	56.24	87.81	-31.57	39.16	17.08	Peak
4	5821.000	110.26	-----	-----	92.32	17.94	Peak
5	5850.000	60.79	122.20	-61.41	42.79	18.00	Peak
6	5925.000	54.35	68.21	-13.86	36.47	17.88	Peak
7	5936.000	55.57	68.20	-12.63	37.73	17.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax20\_5180MHz  
Test BY :Gavin Wu

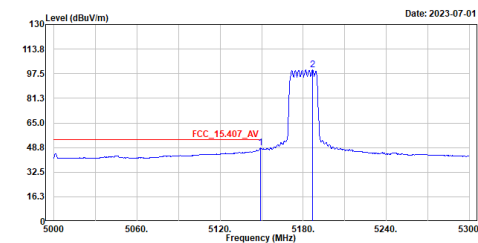


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.400	48.40	54.00	-5.60	32.69	15.71	Average
2	5186.900	99.94	-----	-----	84.07	15.87	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax20\_5180MHz  
Test BY :Gavin Wu

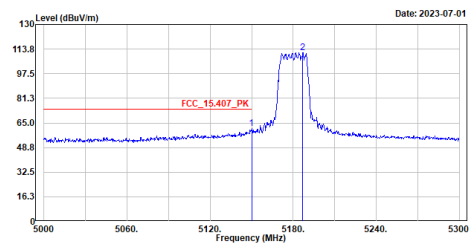


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	61.50	74.00	-12.50	45.78	15.72	Peak
2	5186.900	111.56	-----	-----	95.69	15.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax20\_5180MHz  
Test BY :Gavin Wu

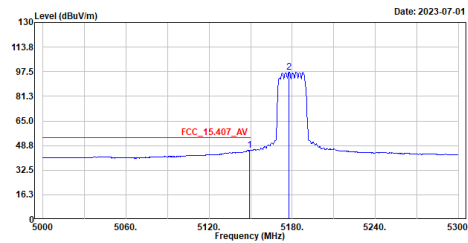

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.400	45.87	54.00	-8.13	30.16	15.71	Average
2	5177.900	97.27	-----	-----	81.43	15.84	Average

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax20\_5180MHz  
Test BY :Gavin Wu

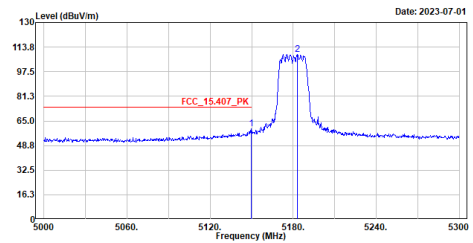

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.700	59.65	74.00	-14.35	43.94	15.71	Peak
2	5183.000	109.15	-----	-----	93.30	15.85	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax20\_5320MHz  
Test BY :Gavin Wu

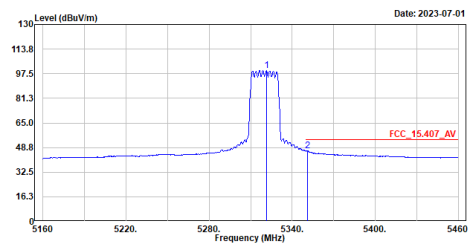

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5321.400	99.69	-----	-----	83.88	15.81	Average
2	5351.100	46.81	54.00	-7.19	30.96	15.85	Average

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax20\_5320MHz  
Test BY :Gavin Wu

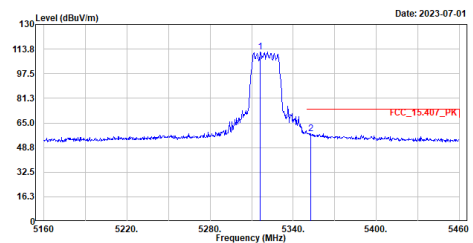

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5316.300	111.99	-----	-----	96.19	15.80	Peak
2	5352.600	58.02	74.00	-15.98	42.17	15.85	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax20\_5320MHz  
Test BY :Gavin Wu

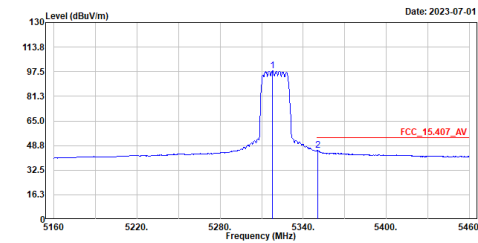


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5317.800	98.11	-----	-----	82.30	15.81	Average
2	5350.500	45.63	54.00	-8.37	29.78	15.85	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax20\_5320MHz  
Test BY :Gavin Wu

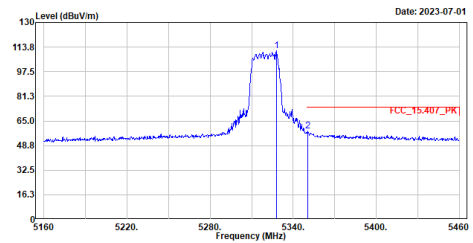


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5328.000	111.51	-----	-----	95.68	15.83	Peak
2	5350.800	58.29	74.00	-15.71	42.44	15.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax20\_5500MHz  
Test BY :Gavin Wu

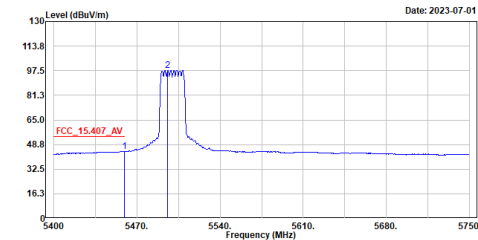


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.500	44.23	54.00	-9.77	28.83	16.20	Average
2	5495.900	97.75	-----	-----	81.36	16.39	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax20\_5500MHz  
Test BY :Gavin Wu

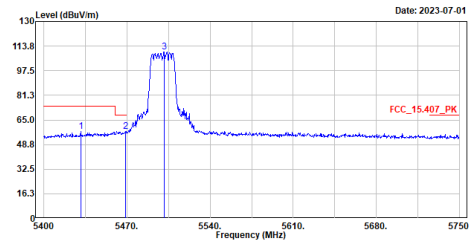


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5431.150	57.38	74.00	-16.62	41.32	16.06	Peak
2	5468.950	57.50	68.22	-10.72	41.24	16.26	Peak
3	5501.150	109.85	-----	-----	93.44	16.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax20\_5500MHz  
Test BY :Gavin Wu

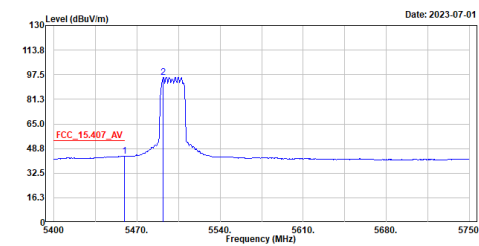

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5459.500	43.68	54.00	-10.32	27.48	16.20	Average
2	5492.050	95.86	-----	-----	79.49	16.37	Average

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax20\_5500MHz  
Test BY :Gavin Wu

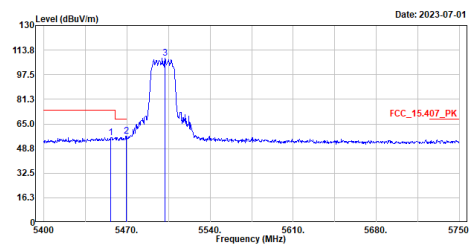

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5456.350	55.98	74.00	-18.02	39.79	16.19	Peak
2	5469.300	56.77	68.22	-11.45	48.51	16.26	Peak
3	5501.850	108.45	-----	-----	92.04	16.41	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax20\_5745MHz  
Test BY :Gavin Wu

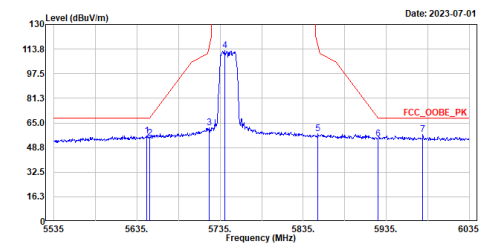

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5646.500	56.51	68.20	-11.69	39.54	16.97	Peak
2	5650.000	54.75	68.21	-13.46	37.78	16.97	Peak
3	5722.000	61.86	115.36	-53.50	44.40	17.46	Peak
4	5741.000	112.60	-----	-----	95.00	17.60	Peak
5	5853.000	57.85	115.36	-57.51	39.85	18.00	Peak
6	5925.000	54.63	68.21	-13.58	36.75	17.88	Peak
7	5979.000	57.21	68.20	-10.99	39.43	17.78	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax20\_5745MHz  
Test BY :Gavin Wu

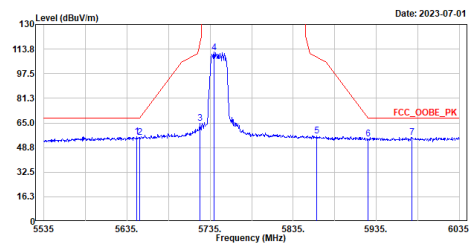

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5647.000	55.90	68.20	-12.30	38.93	16.97	Peak
2	5650.000	55.46	68.21	-12.75	38.49	16.97	Peak
3	5722.500	64.90	116.50	-51.60	47.43	17.47	Peak
4	5740.000	111.49	-----	-----	93.90	17.59	Peak
5	5863.500	56.63	108.42	-51.79	38.63	18.00	Peak
6	5925.000	54.56	68.21	-13.65	36.68	17.88	Peak
7	5977.500	55.56	68.20	-12.64	37.79	17.77	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax20\_5825MHz  
Test BY :Gavin Wu

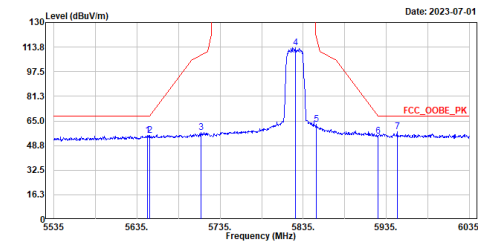


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5648.000	55.39	68.20	-12.81	38.41	16.98	Peak
2	5650.000	55.25	68.21	-12.96	38.28	16.97	Peak
3	5712.500	57.34	108.70	-51.36	39.96	17.38	Peak
4	5825.500	113.21	-----	-----	95.26	17.95	Peak
5	5850.500	62.93	121.06	-58.13	44.93	18.00	Peak
6	5925.000	54.73	68.21	-13.48	36.85	17.88	Peak
7	5948.000	58.06	68.20	-10.14	40.28	17.78	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax20\_5825MHz  
Test BY :Gavin Wu

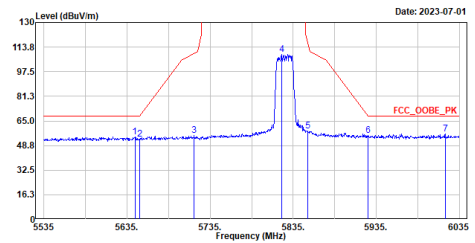


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5644.500	54.45	68.20	-13.75	37.47	16.98	Peak
2	5650.000	53.03	68.21	-15.18	36.06	16.97	Peak
3	5716.000	55.26	109.68	-54.42	37.84	17.42	Peak
4	5821.000	109.03	-----	-----	91.09	17.94	Peak
5	5852.500	58.54	116.50	-57.96	40.54	18.00	Peak
6	5925.000	55.31	68.21	-12.90	37.43	17.88	Peak
7	6018.000	56.57	68.20	-11.63	38.72	17.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax40\_5190MHz  
Test BY :Gavin Wu

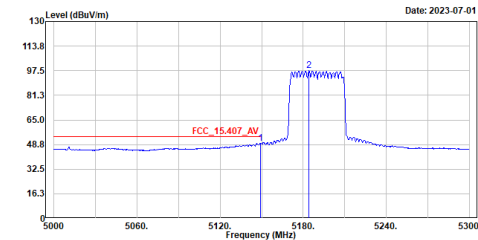


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5149.100	49.71	54.00	-4.29	34.81	15.70	Average
2	5184.200	97.46	-----	-----	81.60	15.86	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax40\_5190MHz  
Test BY :Gavin Wu

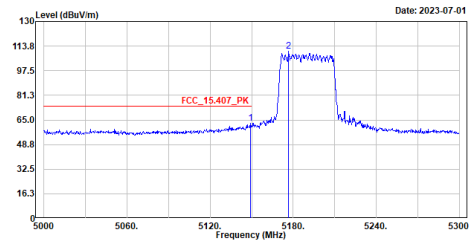


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5149.100	62.68	74.00	-11.32	46.98	15.70	Peak
2	5176.700	110.35	-----	-----	94.52	15.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax40\_5190MHz  
Test BY :Gavin Wu

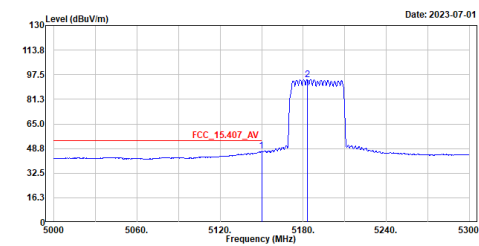


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	47.11	54.00	-6.89	31.39	15.72	Average
2	5183.000	94.38	-----	-----	78.53	15.85	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax40\_5190MHz  
Test BY :Gavin Wu

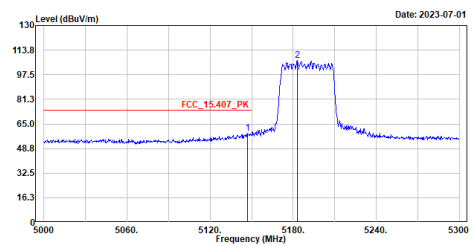


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5147.300	58.70	74.00	-15.30	42.99	15.71	Peak
2	5183.000	106.71	-----	-----	90.86	15.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax40\_5310MHz  
Test BY :Peter

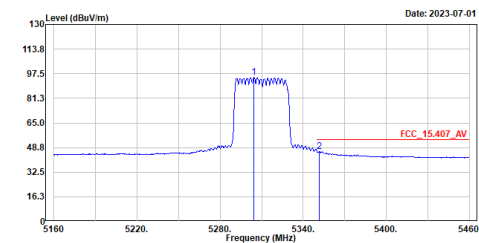


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5304.600	94.94	-----	-----	79.16	15.78	Average
2	5351.400	46.21	54.00	-7.79	30.36	15.85	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax40\_5310MHz  
Test BY :Peter

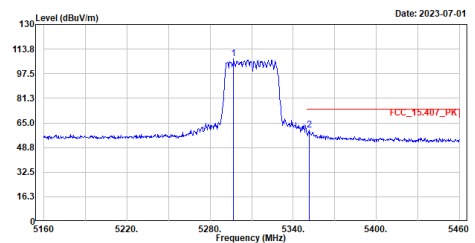

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5297.100	107.55	-----	-----	91.77	15.78	Peak
2	5351.700	60.27	74.00	-13.73	44.42	15.85	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax40\_5310MHz  
Test BY :Peter

Level (dBuV/m)

Date: 2023-07-01

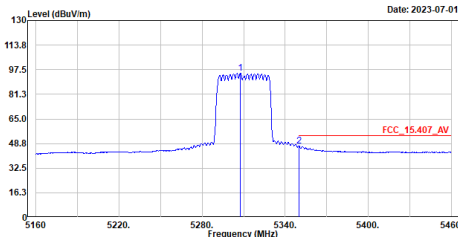

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5307.600	95.10	-----	-----	79.31	15.79	Average
2	5350.200	47.25	54.00	-6.75	31.40	15.85	Average


Note:

1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax40\_5310MHz  
Test BY :Peter

Level (dBuV/m)

Date: 2023-07-01

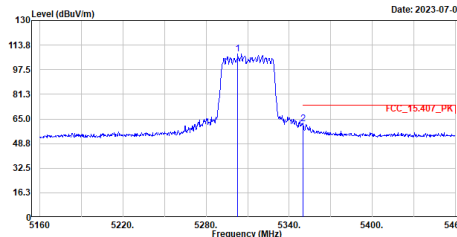

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5302.800	107.85	-----	-----	92.07	15.78	Peak
2	5350.200	61.59	74.00	-12.41	45.74	15.85	Peak


Note:

1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax40\_5510MHz  
Test BY :Peter

Level (dBuV/m)

Date: 2023-07-01

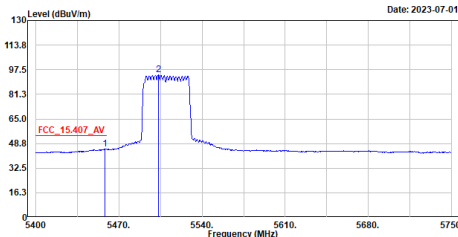

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5458.450	45.34	54.00	-8.66	29.15	16.19	Average
2	5503.250	93.95	-----	-----	77.53	16.42	Average


Note:

1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax40\_5510MHz  
Test BY :Peter

Level (dBuV/m)

Date: 2023-07-01

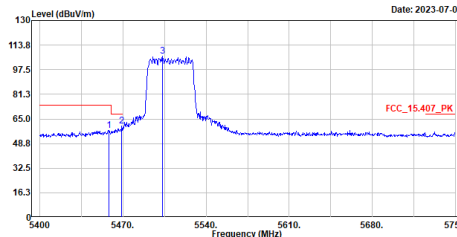


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5458.450	57.36	74.00	-16.64	41.17	16.19	Peak
2	5468.950	60.37	68.22	-7.85	44.11	16.26	Peak
3	5503.250	106.42	-----	-----	90.00	16.42	Peak

Note:

1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.




Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax40\_5510MHz  
Test BY :Peter

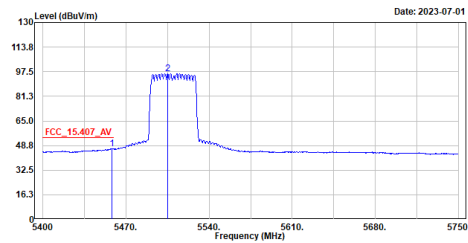

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5458.450	46.80	54.00	-7.20	30.61	16.19	Average
2	5505.000	96.31	-----	-----	79.89	16.42	Average

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax40\_5510MHz  
Test BY :Peter

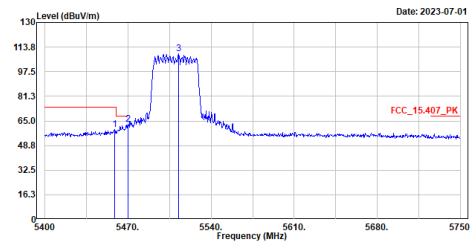

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5458.800	59.21	74.00	-14.79	43.01	16.20	Peak
2	5470.000	62.86	68.22	-5.36	46.60	16.26	Peak
3	5512.700	109.36	-----	-----	92.88	16.48	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax40\_5670MHz  
Test BY :Peter

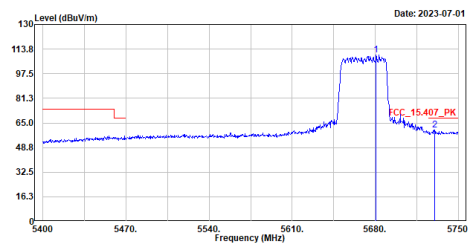

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5680.700	109.81	-----	-----	92.69	17.12	Peak
2	5730.050	60.16	68.22	-8.06	42.64	17.52	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax40\_5670MHz  
Test BY :Peter

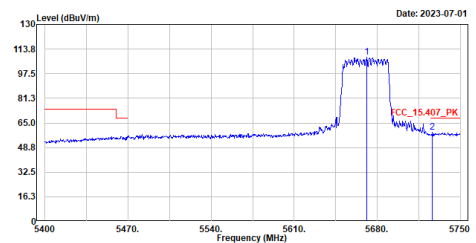


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5670.900	108.25	-----	-----	91.19	17.06	Peak
2	5726.550	58.76	68.22	-9.46	41.27	17.49	Peak

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax40\_5755MHz  
Test BY :Peter

Date: 2023-07-01

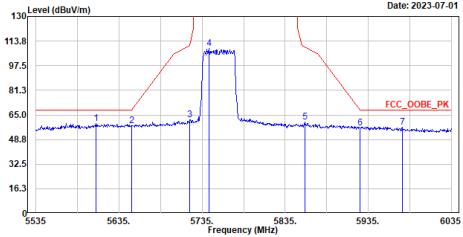


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5607.500	59.45	68.20	-8.75	42.40	17.05	Peak
2	5650.000	57.85	68.21	-10.36	40.88	16.97	Peak
3	5720.500	61.87	111.94	-50.07	44.42	17.45	Peak
4	5743.000	108.95	-----	-----	91.33	17.62	Peak
5	5858.500	60.35	109.82	-49.47	42.35	18.00	Peak
6	5925.000	56.60	68.21	-11.61	38.72	17.88	Peak
7	5976.000	57.12	68.20	-11.08	39.35	17.77	Peak

Note:

1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax40\_5755MHz  
Test BY :Peter

Date: 2023-07-01

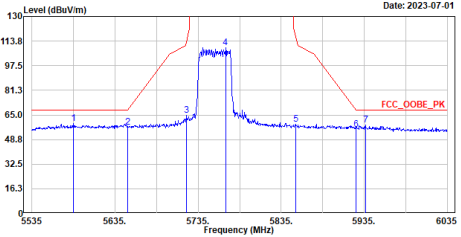


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5585.000	59.19	68.20	-9.01	42.16	17.03	Peak
2	5650.000	56.72	68.21	-11.49	39.75	16.97	Peak
3	5721.000	64.76	113.08	-48.32	47.30	17.46	Peak
4	5768.000	109.59	-----	-----	91.85	17.74	Peak
5	5852.500	58.67	116.50	-57.83	40.67	18.00	Peak
6	5925.000	55.66	68.21	-12.55	37.78	17.88	Peak
7	5936.500	58.25	68.20	-9.95	40.42	17.83	Peak

Note:

1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax40\_5795MHz  
Test BY :Peter

Date: 2023-07-01

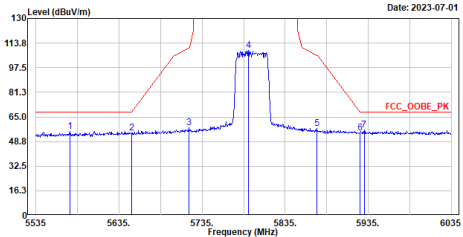


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5576.000	55.65	68.20	-12.55	38.71	16.94	Peak
2	5650.000	54.29	68.21	-13.92	37.32	16.97	Peak
3	5719.000	57.72	110.52	-52.80	40.28	17.44	Peak
4	5791.000	108.93	-----	-----	91.09	17.84	Peak
5	5873.000	57.45	105.76	-48.31	39.46	17.99	Peak
6	5925.000	54.21	68.21	-14.00	36.33	17.88	Peak
7	5930.000	56.43	68.20	-11.77	38.58	17.85	Peak

Note:

1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax40\_5795MHz  
Test BY :Peter

Date: 2023-07-01

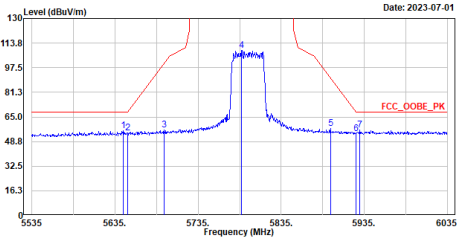


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5645.000	55.99	68.20	-12.21	39.01	16.98	Peak
2	5650.000	54.31	68.21	-13.90	37.34	16.97	Peak
3	5694.000	56.43	100.76	-44.33	39.19	17.24	Peak
4	5787.500	108.76	-----	-----	90.94	17.82	Peak
5	5894.500	57.46	90.77	-33.31	39.47	17.99	Peak
6	5925.000	53.75	68.21	-14.46	35.87	17.88	Peak
7	5929.500	56.44	68.20	-11.76	38.59	17.85	Peak

Note:

1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax80\_5210MHz  
Test BY :Peter

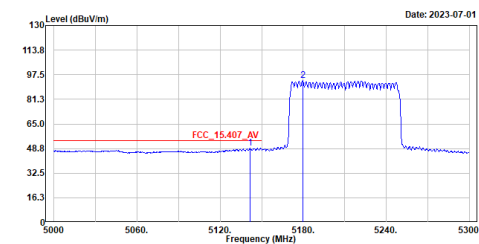


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5141.600	48.90	54.00	-5.10	33.19	15.71	Average
2	5179.700	93.46	-----	-----	77.62	15.84	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax80\_5210MHz  
Test BY :Peter

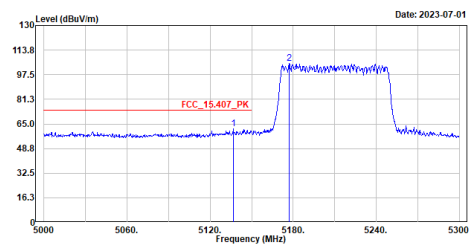


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5136.800	61.77	74.00	-12.23	46.07	15.70	Peak
2	5177.300	104.90	-----	-----	89.07	15.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax80\_5210MHz  
Test BY :Peter

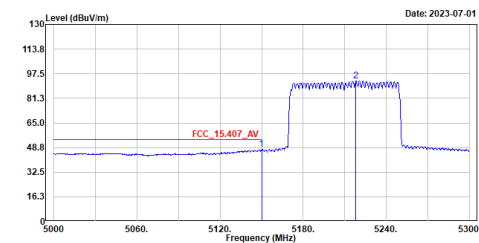


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5150.000	47.42	54.00	-6.58	31.70	15.72	Average
2	5218.100	92.77	-----	-----	76.86	15.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax80\_5210MHz  
Test BY :Peter

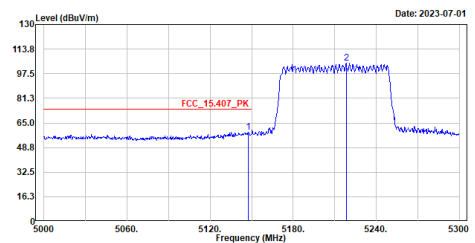


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5147.600	58.87	74.00	-15.13	43.17	15.70	Peak
2	5218.400	104.38	-----	-----	88.47	15.91	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

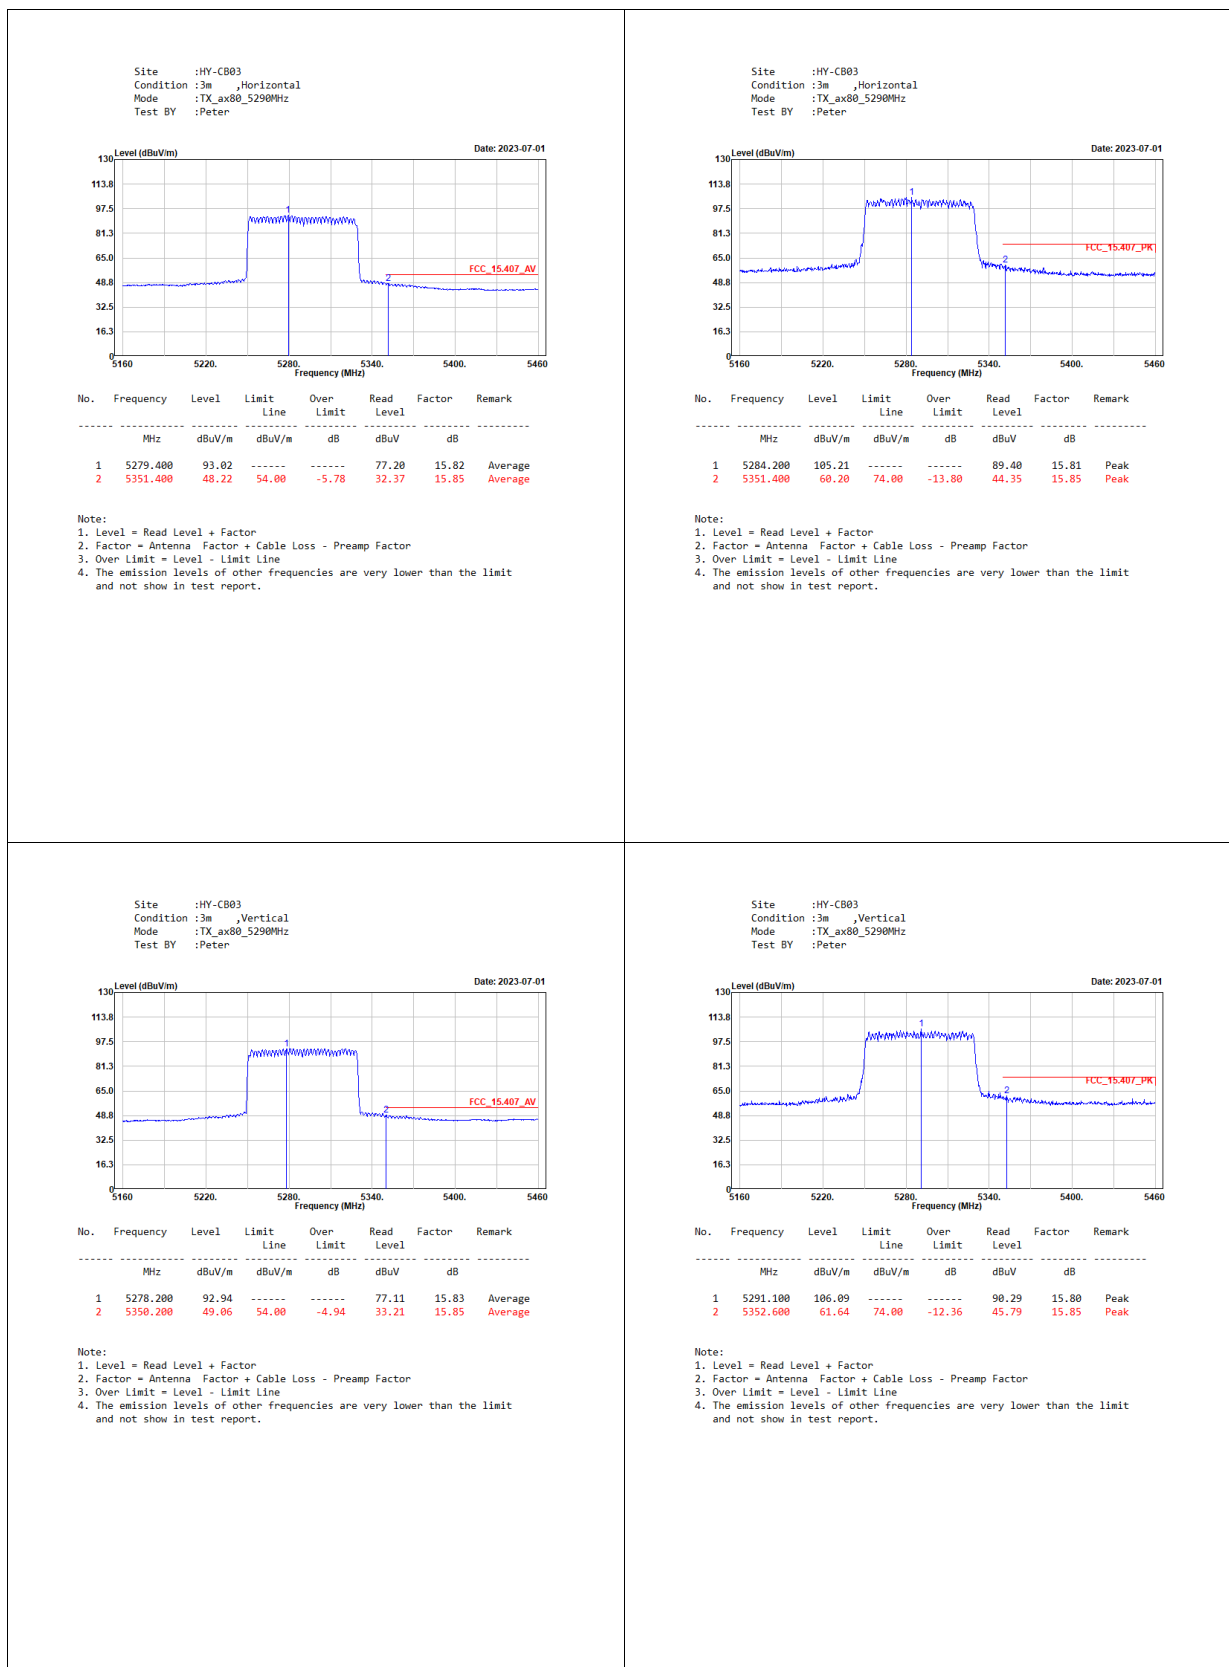

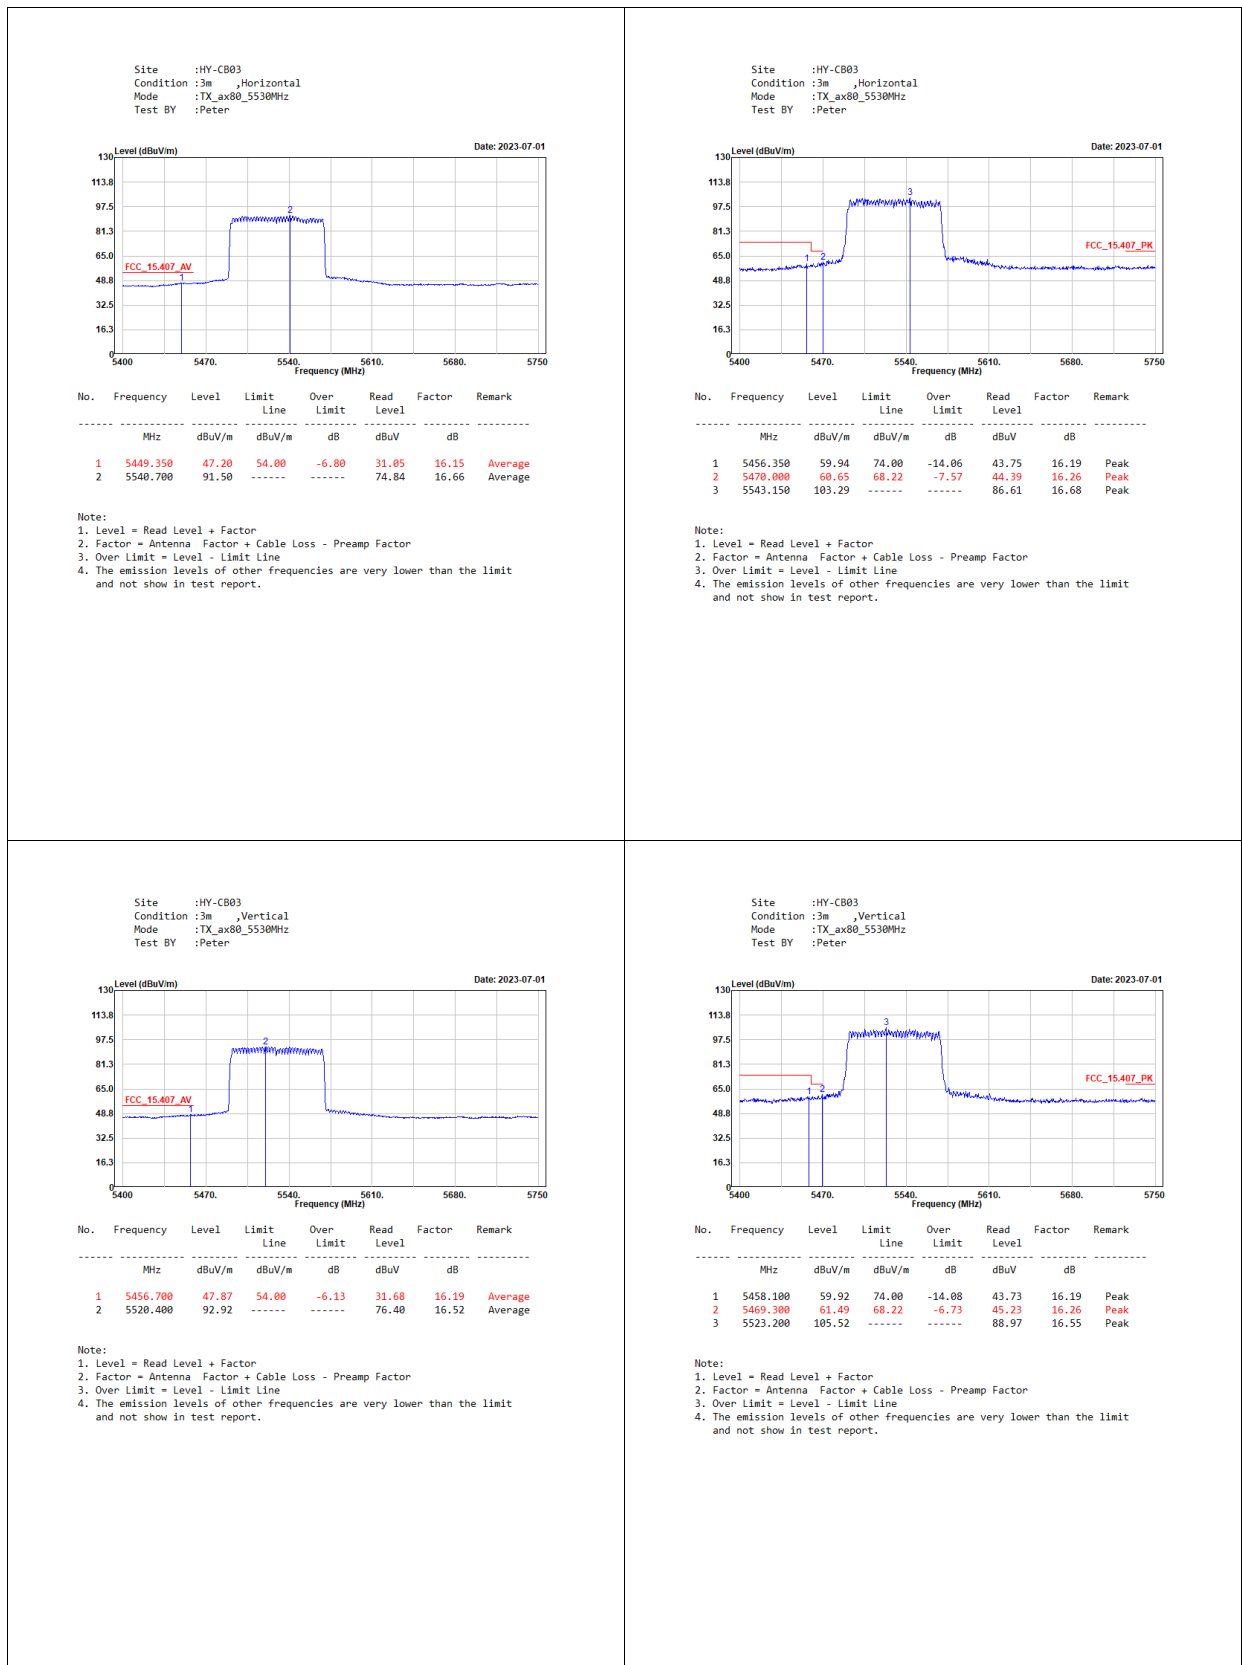

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_ax80\_5775MHz  
Test BY :Peter

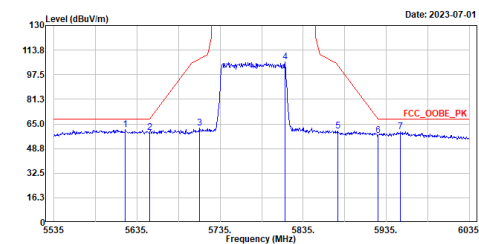


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5621.000	61.32	68.20	-6.88	44.30	17.02	Peak
2	5650.000	59.22	68.21	-8.99	42.25	16.97	Peak
3	5710.000	62.14	108.00	-45.86	44.77	17.37	Peak
4	5813.000	105.87	-----	-----	87.95	17.92	Peak
5	5876.500	60.36	104.09	-43.73	42.36	18.00	Peak
6	5925.000	57.27	68.21	-10.94	39.39	17.88	Peak
7	5952.000	59.68	68.20	-8.52	41.90	17.78	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_ax80\_5775MHz  
Test BY :Peter

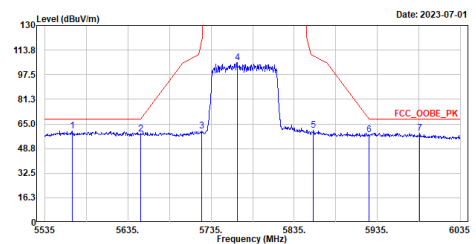


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5568.000	60.28	68.20	-7.92	43.40	16.88	Peak
2	5650.000	58.36	68.21	-9.85	41.39	16.97	Peak
3	5724.000	60.20	119.92	-59.72	42.73	17.47	Peak
4	5766.500	105.32	-----	-----	87.60	17.72	Peak
5	5858.000	60.68	109.96	-49.28	42.68	18.00	Peak
6	5925.000	58.04	68.21	-10.17	40.16	17.88	Peak
7	5986.000	59.03	68.20	-9.17	41.25	17.78	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7. Occupied Bandwidth

### 7.1. Test Setup

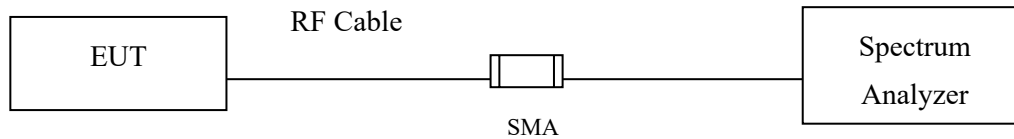

### 7.2. Limits

For the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz

### 7.3. Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

## 7.4. Test Result of Occupied Bandwidth

Product : Mobile Computer  
 Test Item : Occupied Bandwidth Data  
 Test Mode : Transmit (802.11a)  
 Test Date : 2023/06/05


## Chain A

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745	16344	>500	Pass
157	5785	16344	>500	Pass
165	5825	16344	>500	Pass

## Chain B

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745	16304	>500	Pass
157	5785	16344	>500	Pass
165	5825	16344	>500	Pass

## Channel 149

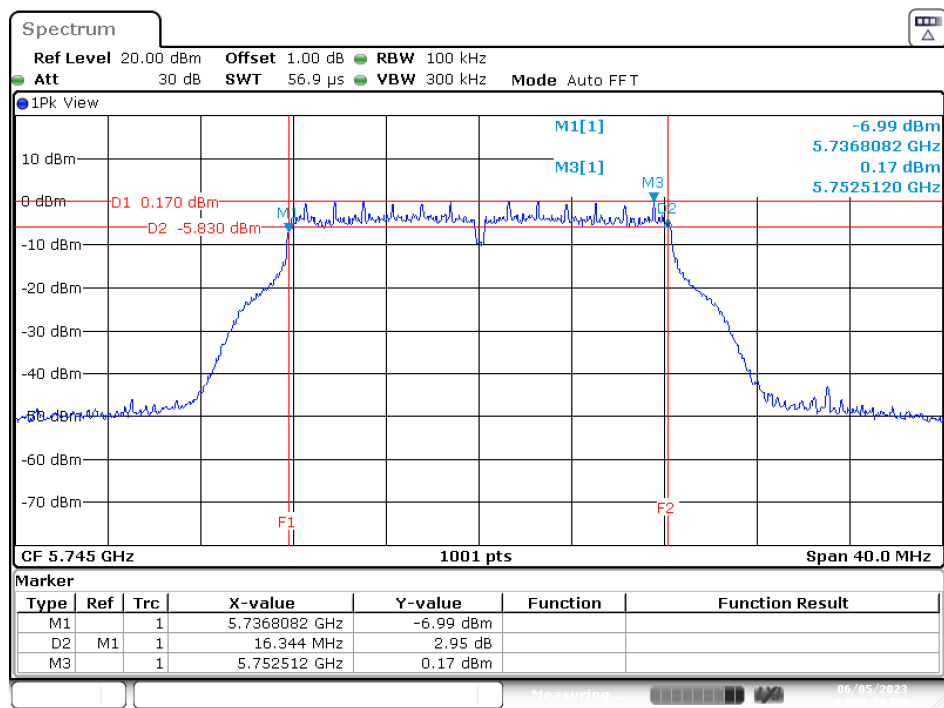

Date: 5.JUN.2023 16:01:39



Product : Mobile Computer  
 Test Item : Occupied Bandwidth Data  
 Test Mode : Transmit (802.11ax-20 MHz)  
 Test Date : 2023/06/05


## Chain A

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745	18981	>500	Pass
157	5785	18981	>500	Pass
165	5825	18981	>500	Pass

## Chain B

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745	18941	>500	Pass
157	5785	18941	>500	Pass
165	5825	18941	>500	Pass

## Channel 149

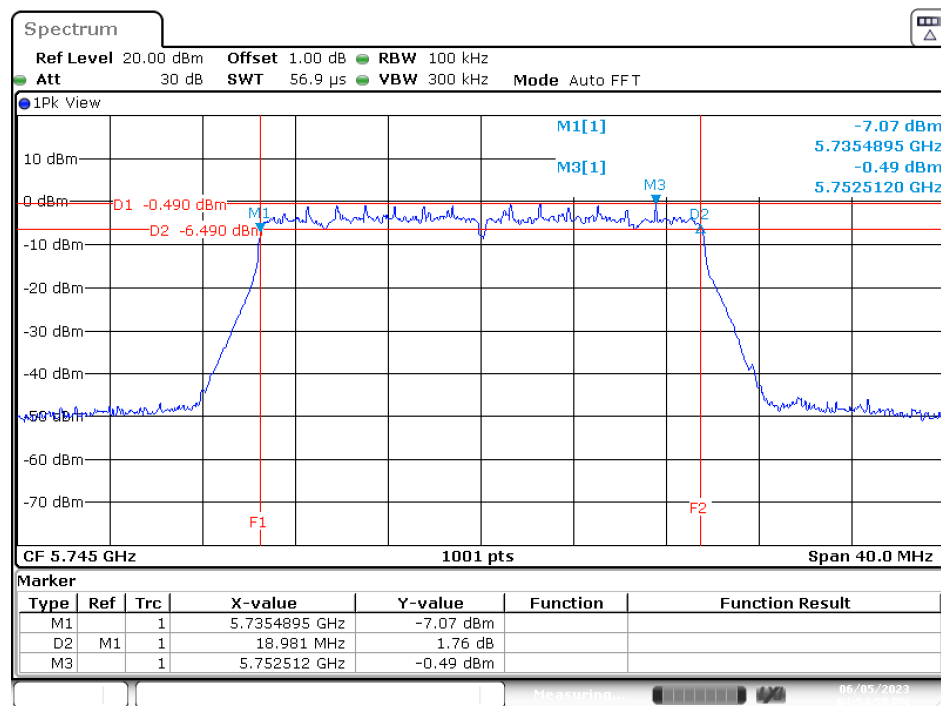

Date: 5.JUN.2023 16:54:59

Product : Mobile Computer  
 Test Item : Occupied Bandwidth Data  
 Test Mode : Transmit (802.11ax-40 MHz)  
 Test Date : 2023/06/05


## Chain A

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
151	5755	37642	>500	Pass
159	5795	37323	>500	Pass

## Chain B

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
151	5755	37243	>500	Pass
159	5795	36683	>500	Pass

## Channel 151

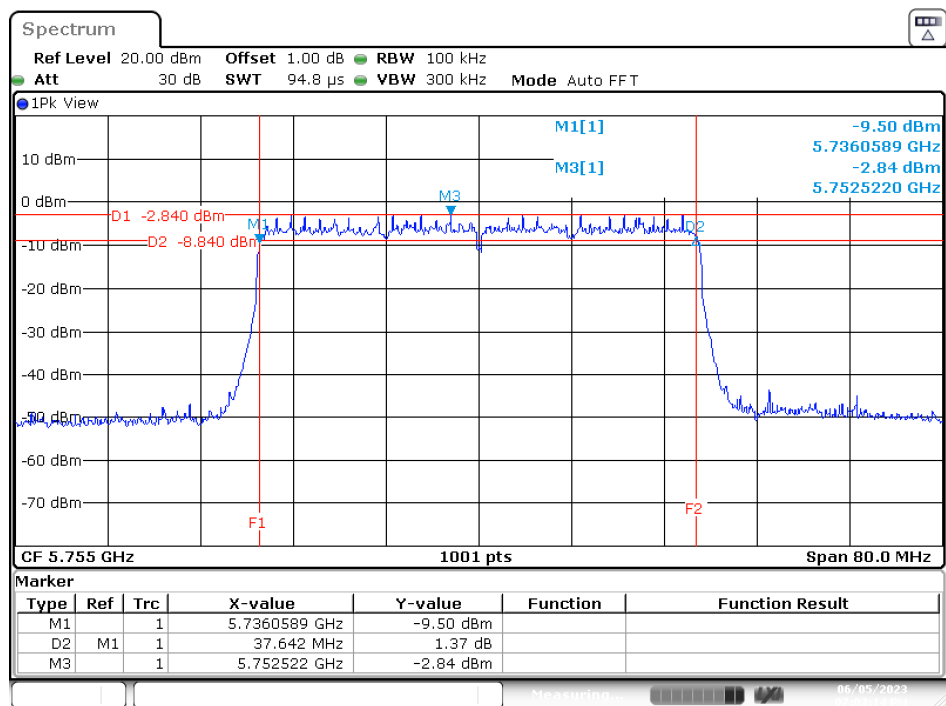

Date: 5.JUN.2023 19:03:15

Product : Mobile Computer  
 Test Item : Occupied Bandwidth Data  
 Test Mode : Transmit (802.11ax-80 MHz)  
 Test Date : 2023/06/05


## Chain A

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
155	5775	77200	>500	Pass

## Chain B

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
155	5775	77040	>500	Pass


## Channel 155

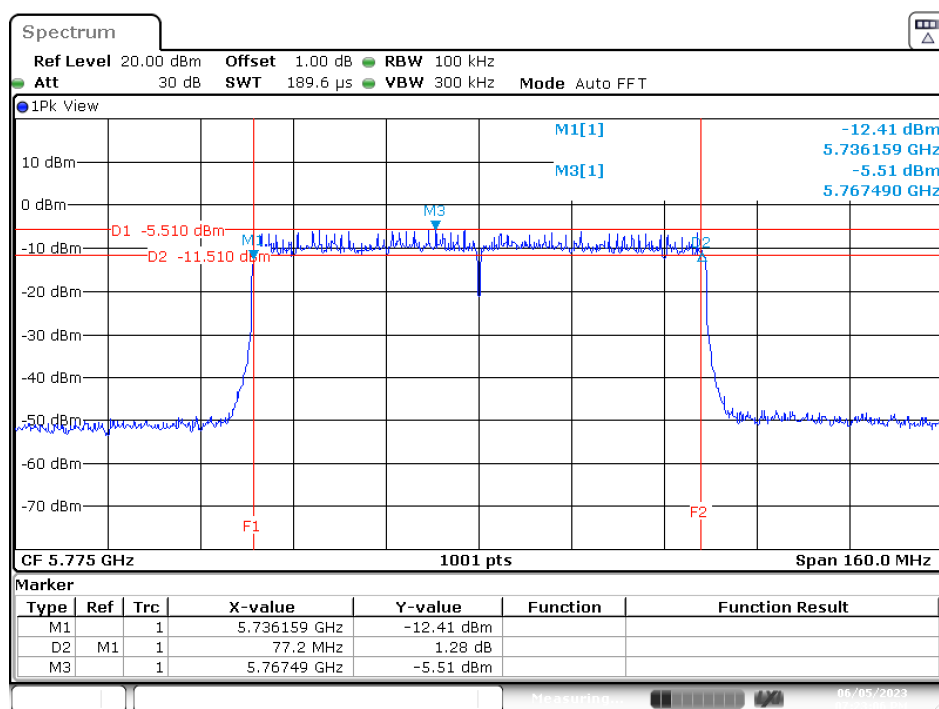

Date: 5.JUN.2023 19:23:06

## 8. Duty Cycle

### 8.1. Test Setup

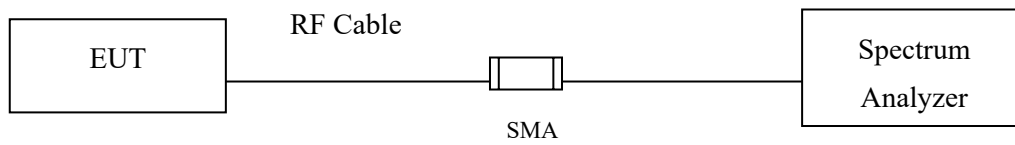

### 8.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to U-NII test procedure of KDB789033 for compliance to FCC 47CFR 15.407 requirements.

### 8.3. Test Result of Duty Cycle

Product : Mobile Computer  
 Test Item : Duty Cycle  
 Test Mode : Transmit

Duty Cycle Formula:


$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$

$$\text{Duty Factor} = 10 \text{ Log} (1/\text{Duty Cycle})$$

Results:


5 GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	1.4200	1.5300	92.81	0.32
802.11ax-20 MHz	3.8800	4.0000	97.00	0.13
802.11ax-40 MHz	1.9700	2.0800	94.71	0.24
802.11ax-80 MHz	0.9700	1.0800	89.81	0.47

802.11a

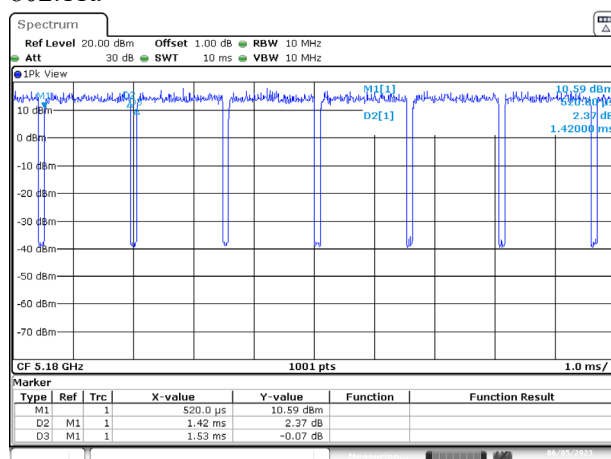


Date: 5 JUN 2023 15:04:13

802.11ax-20 MHz

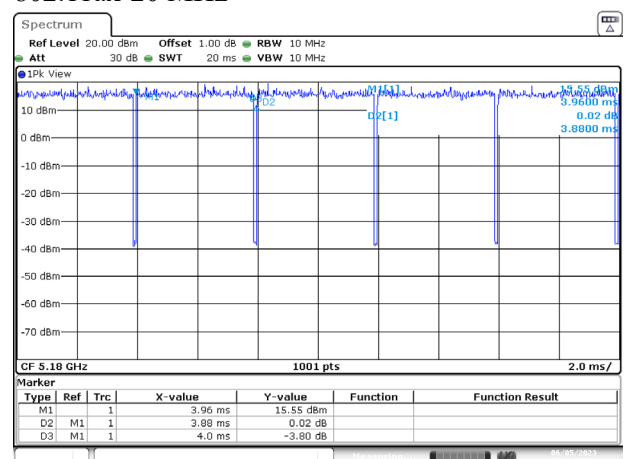


Date: 5 JUN 2023 16:13:36

802.11ax-40 MHz

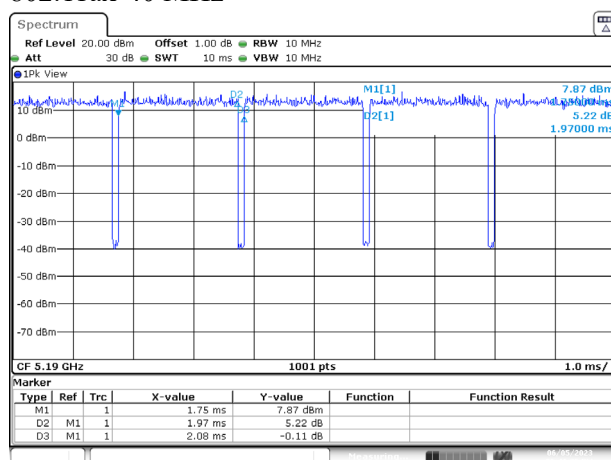

Date: 5 JUN 2023 18:41:26

802.11ax-80 MHz

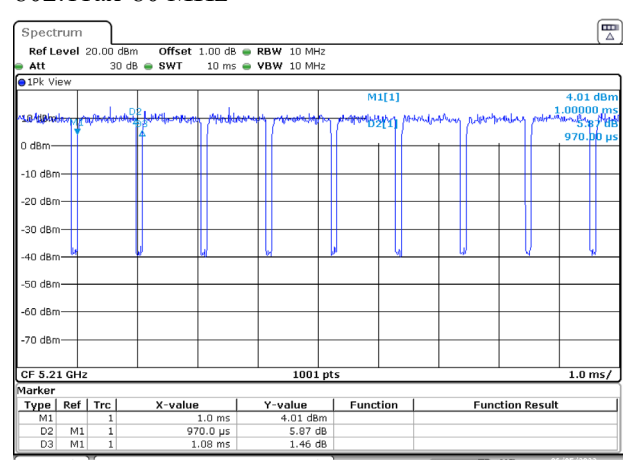

Date: 5 JUN 2023 19:10:17