

Test Report

Report No.: MTi220725016-04E1

Date of issue: 2022-08-30

Applicant: Edifier International Limited

Product: True Wireless Gaming Earbuds

Model(s): EDF700035

FCC ID: Z9G-EDF194

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	5
1.3	Measurement uncertainty	6
2	Summary of Test Result.....	7
3	Test Facilities and Accreditations	8
3.1	Test laboratory	8
4	Equipment List	9
5	Test Result	10
5.1	Antenna requirement	10
5.2	AC power line conducted emissions.....	11
5.3	20dB occupied bandwidth	14
5.4	Conducted peak output power	18
5.5	Carrier frequency separation	22
5.6	Average time of occupancy	24
5.7	Number of hopping channels	28
5.8	Conducted emissions at the band edge	30
5.9	Conducted spurious emissions	34
5.10	Radiated spurious emission	37
	Photographs of the Test Setup.....	46
	Photographs of the EUT.....	47


Test Result Certification	
Applicant:	Edifier International Limited
Address:	P.O. Box 6264 General Post Office Hong Kong
Manufacturer:	Dongguan Edifier Esports Technology Co., Ltd
Address:	5th floor, Office Building in the 1st district, No. 2, East Industry Road, Songshan Lake Science & Technology Industrial Park, Dongguan, 523808, CHINA
Factory:	Dongguan Edifier Technology Co., Ltd.
Address:	No.2 Gongyedong Road, Songshan Lake Sci&Tech Industry Park, Dongguan, Guangdong 523808, PR.China
Product description	
Product name:	True Wireless Gaming Earbuds
Trademark:	EDIFIER, HECATE
Model name:	EDF700035
Serial Model:	N/A
Standards:	FCC 47 CFR Part 15 Subpart C
Test method:	ANSI C63.10-2013
Date of Test	
Date of test:	2022-08-16 ~ 2022-08-30
Test result:	Pass

Test Engineer :



(Cindy Qin)

Reviewed By :



(Leon Chen)

Approved By :



(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	True Wireless Gaming Earbuds
Model name:	EDF700035
Series Model:	N/A
Model difference:	N/A
Electrical rating:	Earbuds Input: DC 5V 200mA Battery: DC 3.7V 30mAh Charging case Input: DC 5V 1A Battery: DC 3.7V 400mAh
Hardware version:	V1.6
Software version:	V1.0
Accessories:	Cable: USB-A to USB-C (47cm)
EUT serial number:	MTi220725016-04-S0001
RF specification:	
Bluetooth version:	V5.3
Operation frequency:	2402 MHz ~ 2480 MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna designation:	Chip antenna, antenna Gain: 2.7 dBi
Max. peak conducted output power:	7.29 dBm

1.2 Description of test modes

1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	-	-

1.2.2 Test channels

Channel	Frequency
Lowest (CH0)	2402MHz
Middle (CH39)	2441MHz
Highest (CH78)	2480MHz

Note: The test software has been used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

1.2.3 Description of support units

Support equipment list			
Description	Model	Serial No.	Manufacturer
Adapter	HW-090200CH0	/	Huizhou BYD Electronics Co., Ltd.

1.3 Measurement uncertainty

Parameter	Measurement uncertainty
AC power line conducted emission (9 kHz~30 MHz)	±2.5 dB
Occupied Bandwidth	±3 %
Conducted RF output power	±0.16 dB
Conducted spurious emissions	±0.21 dB
Radiated emission (9 kHz ~ 30 MHz)	±4.0 dB
Radiated emission (30 MHz~1 GHz)	±4.2 dB
Radiated emission (above 1 GHz)	±4.3 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 Summary of Test Result

No.	FCC reference	Description of test	Result
1	§ 15.203	Antenna requirement	Pass
2	§ 15.207	AC power line conducted emissions	Pass
3	15.247(a)(1)	20dB occupied bandwidth	Pass
4	15.247(b)(1)	Conducted peak output power	Pass
5	15.247(a)(1)	Carrier Frequencies Separation	Pass
6	15.247(a)(1)	Average time of occupancy (Dwell time)	Pass
7	15.247(a)(1)	Number of hopping channels	Pass
8	15.247(d)	Conducted emission at the band edge	Pass
9	15.247(d)	Conducted spurious emissions	Pass
10	15.247(d)	Radiated spurious emissions	Pass

Note: N/A means not applicable.

3 Test Facilities and Accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 Equipment List

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTi-E002	EMI Test Receiver	R&S	ESCI3	101368	2022/05/05	2023/05/04
MTi-E023	Artificial power network	Schwarzbeck	NSLK8127	NSLK8127#841	2022/05/05	2023/05/04
MTi-E025	Artificial power network	Schwarzbeck	NSLK8127	8127183	2022/05/05	2023/05/04
MTi-E043	EMI test receiver	R&S	ESCI7	101166	2022/05/05	2023/05/04
MTi-E046	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00044	2021/05/30	2023/05/29
MTi-E044	Broadband antenna	Schwarzbeck	VULB9163	9163-1338	2021/05/30	2023/05/29
MTi-E045	Horn antenna	Schwarzbeck	BBHA9120D	9120D-2278	2021/05/30	2023/05/29
MTi-E047	Pre-amplifier	Hewlett-Packard	8447F	3113A06184	2022/05/05	2023/05/04
MTi-E048	Pre-amplifier	Agilent	8449B	3008A01120	2022/05/05	2023/05/04
MTi-E120	Broadband antenna	Schwarzbeck	VULB9163	9163-1419	2021/05/30	2023/05/29
MTi-E121	Pre-amplifier	Hewlett-Packard	8447D	2944A09365	2022/04/15	2023/04/14
MTi-E123	Pre-amplifier	Agilent	8449B	3008A04723	2022/05/05	2023/05/04
MTi-E135	Horn antenna	Schwarzbeck	BBHA 9170	00987	2021/05/30	2023/05/29
MTi-E136	Pre-amplifier	Space-Dtronics	EWLAN1840G-G45	210405001	2022/05/05	2023/05/04
MTi-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2022/05/05	2023/05/04
MTi-E067	RF Control Unit	Tonscend	JS0806-1	19D8060152	2022/05/05	2023/05/04
MTi-E068	RF Control Unit	Tonscend	JS0806-2	19D8060153	2022/05/05	2023/05/04
MTi-E069	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2022/05/05	2023/05/04
MTi-E010S	EMI Measurement Software	Farad	EZ-EMC Ver. EMEC-3A1	/	/	/
MTi-E014S	RF Test System	Tonscend	TS®JS1120 V2.6.88.0330	/	/	/

5 Test Result

5.1 Antenna requirement

15.203 requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Description of the antenna of EUT

The antenna of EUT is Chip antenna (Antenna Gain: 2.7 dBi). which is no consideration of replacement.

5.2 AC power line conducted emissions

5.2.1 Limits


Frequency (MHz)	Detector type / Bandwidth	Limit-Quasi-peak dB μ V	Limit-Average dB μ V
0.15 -0.5	Average / 9 kHz	66 to 56	56 to 46
0.5 -5		56	46
5 -30		60	50

Note 1: the limit decreases with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz.

5.2.2 Test Procedures

- The test setup is refer to the standard ANSI C63.10-2013.
- The EUT is connected to the main power through a line impedance stabilization network (LISN). All support equipment is powered from additional LISN(s).
- Emissions were measured on each current carrying line of the EUT using an EMI test receiver connected to the LISN powering the EUT.
- The test receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes described in Item 1.2.
- The test data of the worst-case condition(s) was recorded.

5.2.3 Test setup

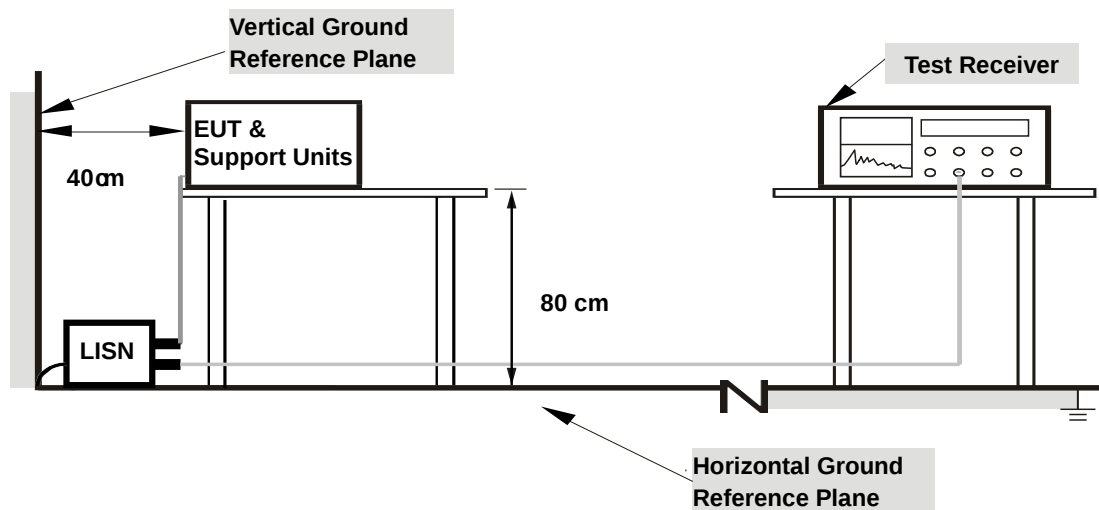

For the actual test configuration, please refer to the related item – Photographs of the test setup.

5.2.4 Test Result

Notes:


All modes of operation of the EUT were investigated, and only the worst-case results are reported.

Calculation formula:

Measurement (dB μ V) = Reading Level (dB μ V) + Correct Factor (dB)


Over (dB) = Measurement (dB μ V) – Limit (dB μ V)

Test mode:	TX-8DPSK-2441MHz	Phase:	L
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	CE chamber 1

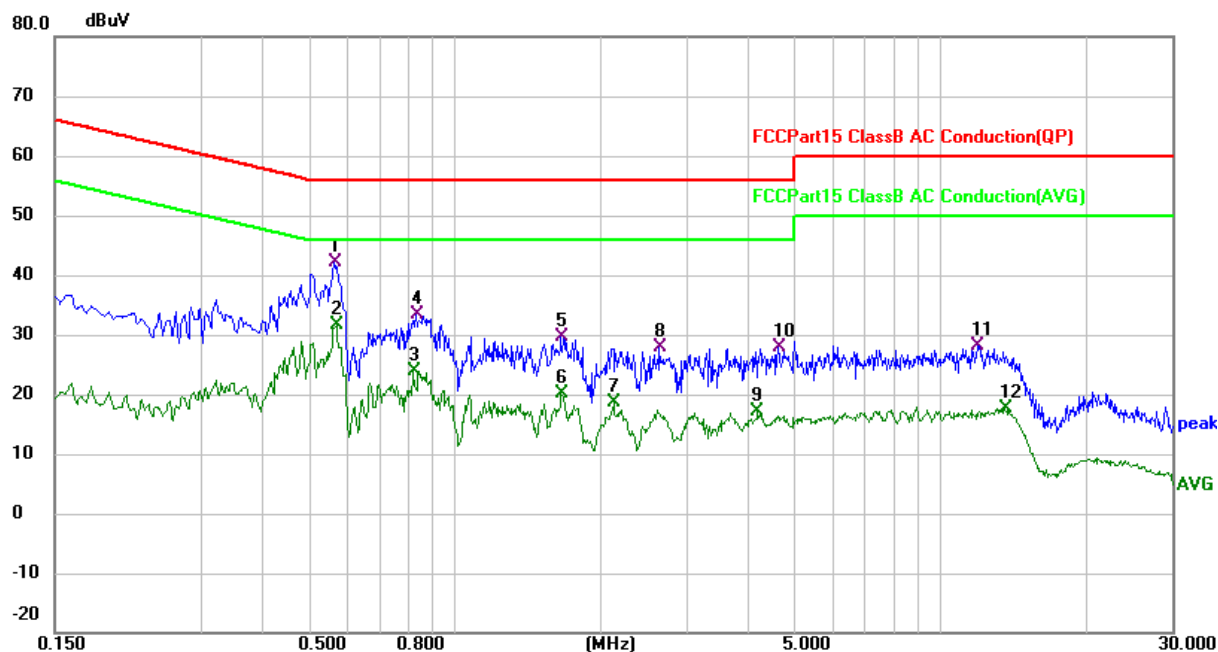

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.5660	30.32	11.82	42.14	56.00	-13.86	QP
2	0.5700	19.70	11.82	31.52	46.00	-14.48	AVG
3	0.8220	11.71	12.26	23.97	46.00	-22.03	AVG
4	0.8340	21.11	12.27	33.38	56.00	-22.62	QP
5	1.6620	15.70	13.96	29.66	56.00	-26.34	QP
6	1.6620	6.18	13.96	20.14	46.00	-25.86	AVG
7	2.1300	7.85	10.67	18.52	46.00	-27.48	AVG
8	2.6420	17.16	10.67	27.83	56.00	-28.17	QP
9	4.2100	6.54	10.69	17.23	46.00	-28.77	AVG
10	4.6460	17.29	10.70	27.99	56.00	-28.01	QP
11	11.9700	17.31	10.72	28.03	60.00	-31.97	QP
12	13.5820	6.98	10.74	17.72	50.00	-32.28	AVG

Test mode:	TX-8DPSK-2441MHz	Phase:	N
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	CE chamber 1

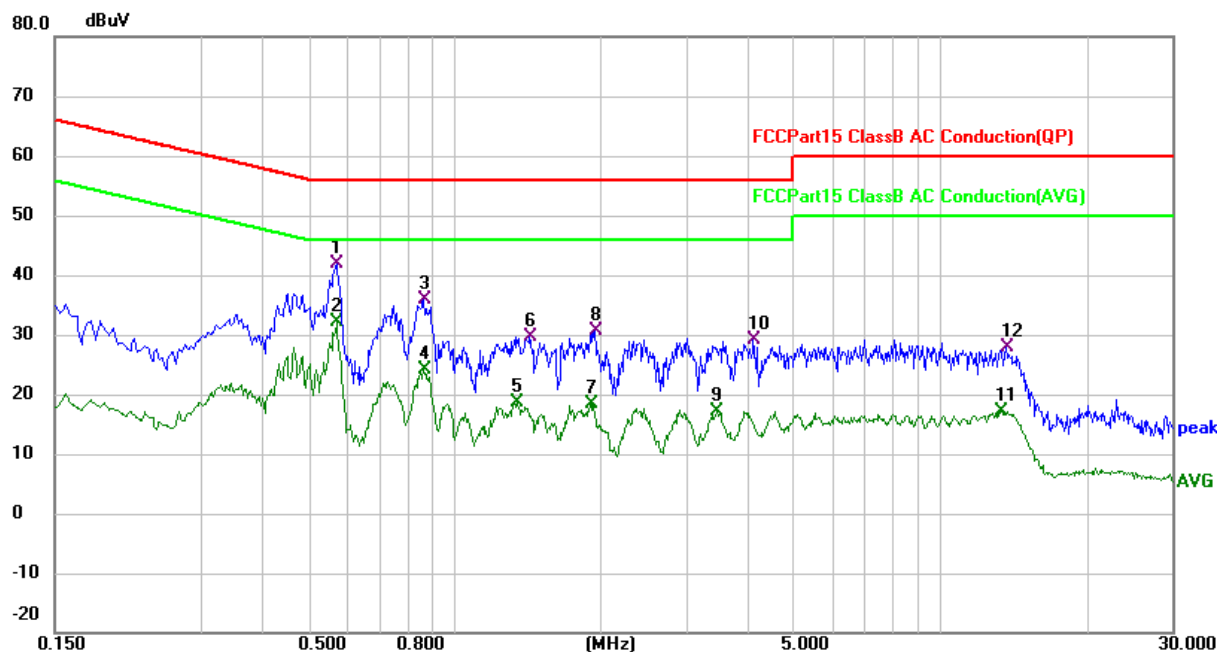


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5700	30.31	11.68	41.99	56.00	-14.01	QP
2 *	0.5700	20.33	11.68	32.01	46.00	-13.99	AVG
3	0.8660	23.57	12.31	35.88	56.00	-20.12	QP
4	0.8660	11.87	12.31	24.18	46.00	-21.82	AVG
5	1.3500	5.20	13.32	18.52	46.00	-27.48	AVG
6	1.4260	16.22	13.48	29.70	56.00	-26.30	QP
7	1.9060	7.71	10.71	18.42	46.00	-27.58	AVG
8	1.9460	19.85	10.72	30.57	56.00	-25.43	QP
9	3.4740	6.52	10.68	17.20	46.00	-28.80	AVG
10	4.1340	18.53	10.66	29.19	56.00	-26.81	QP
11	13.3260	6.39	10.72	17.11	50.00	-32.89	AVG
12	13.6380	17.20	10.73	27.93	60.00	-32.07	QP

5.3 20dB occupied bandwidth

5.3.1 Limits

None, for reporting purposes only.

5.3.2 Test setup









5.3.3 Test procedures

- Test method: ANSI C63.10-2013 Section 6.9.2.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW=30 kHz, VBW=100 kHz, detector= Peak

5.3.4 Test results


Mode	Test channel	Frequency (MHz)	20dB Bandwidth (MHz)
GFSK	CH0	2402	0.9268
	CH39	2441	0.9317
	CH78	2480	0.9185
$\pi/4$ -DQPSK	CH0	2402	1.323
	CH39	2441	1.342
	CH78	2480	1.346
8DPSK	CH0	2402	1.338
	CH39	2441	1.344
	CH78	2480	1.339

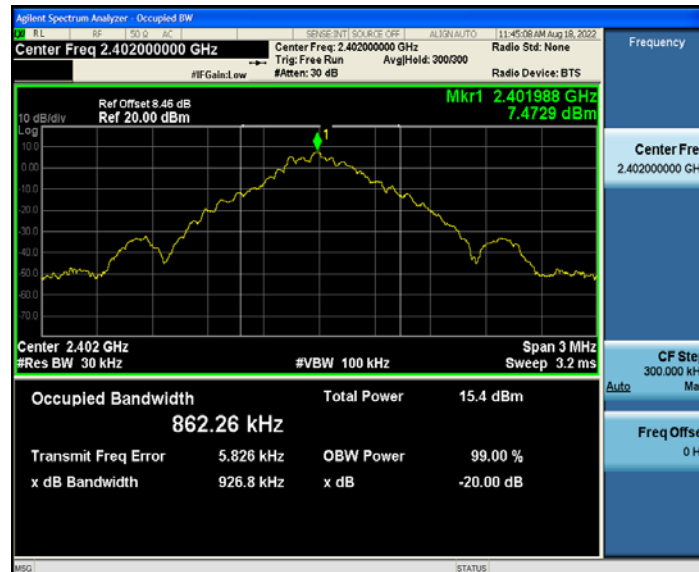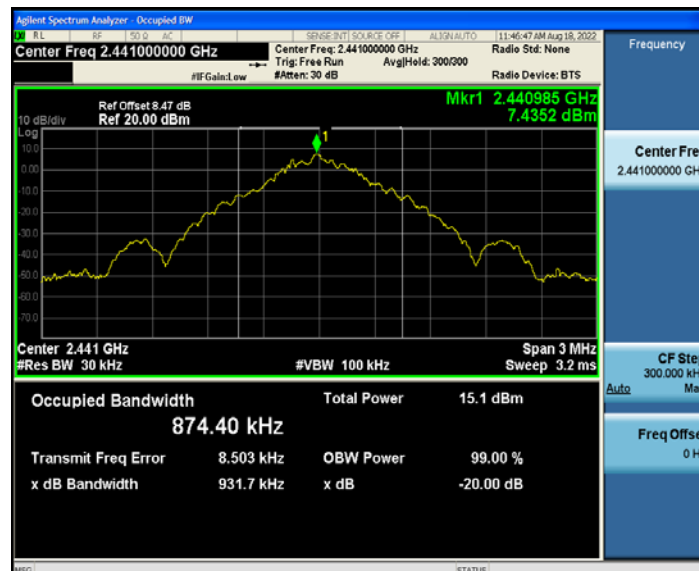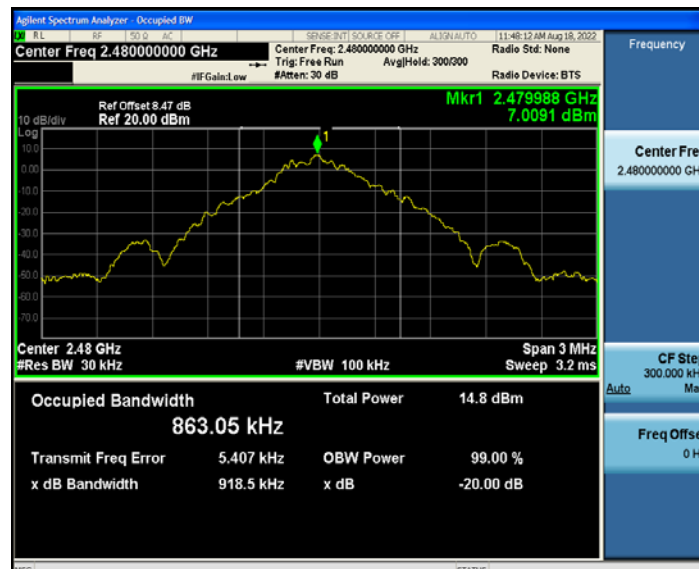GFSK mode - 20dB occupied bandwidth
CH0

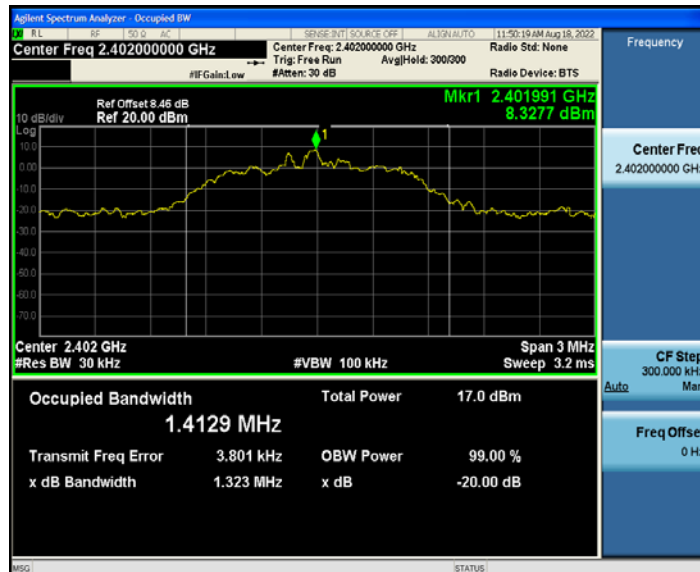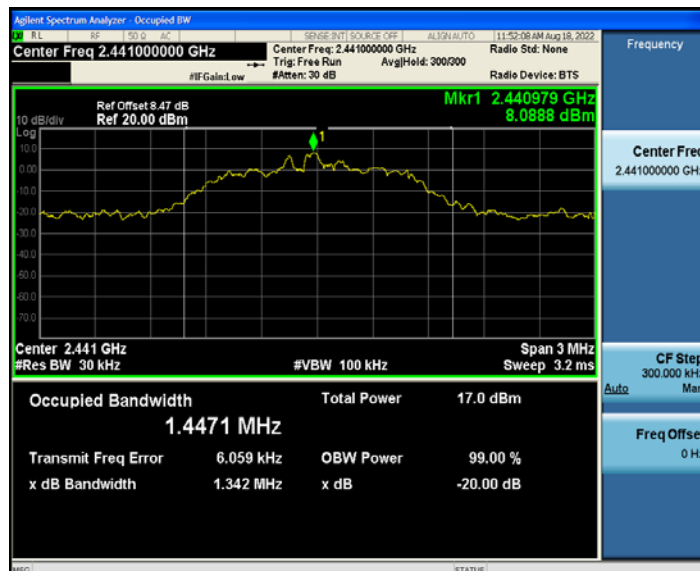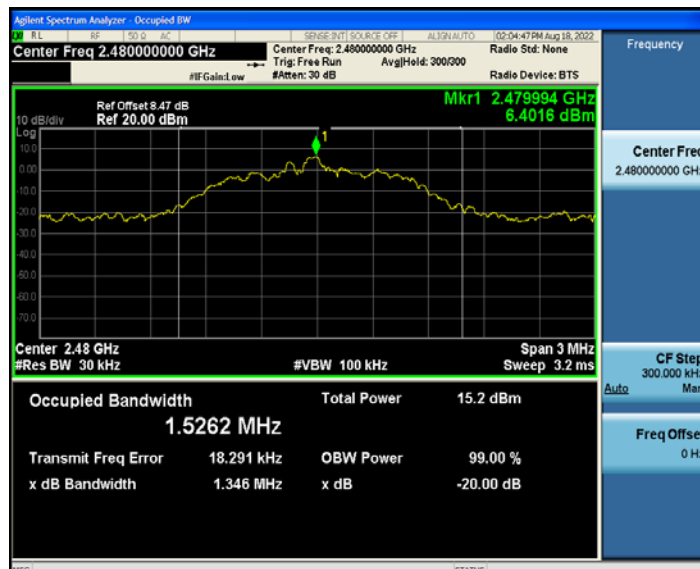CH39

CH78


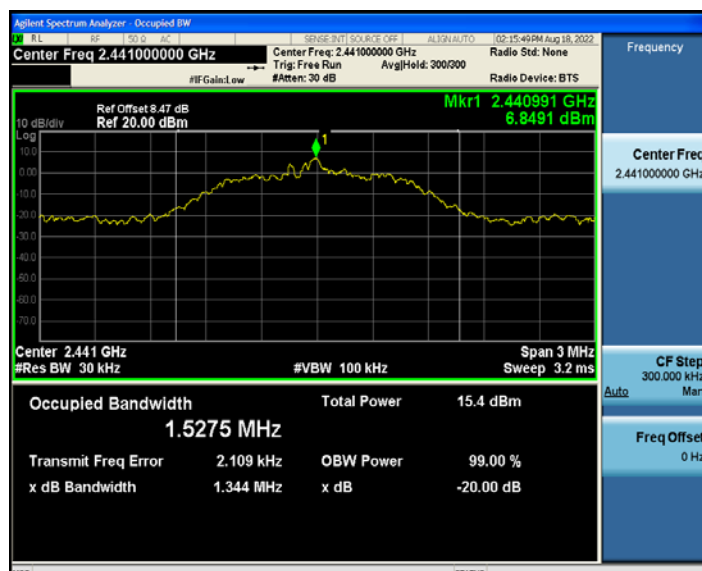
$\pi/4$ -DQPSK mode - 20dB occupied bandwidth
CH0

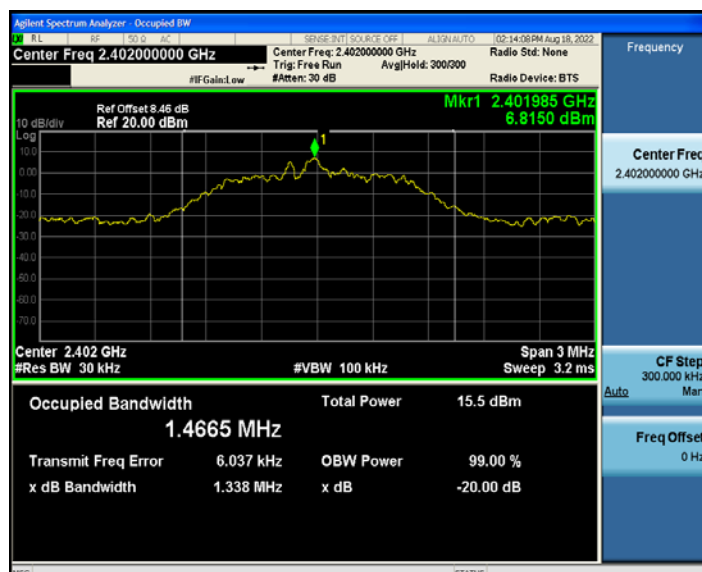CH39

CH78


8DPSK mode - 20dB occupied bandwidth


CH0



CH39



CH78

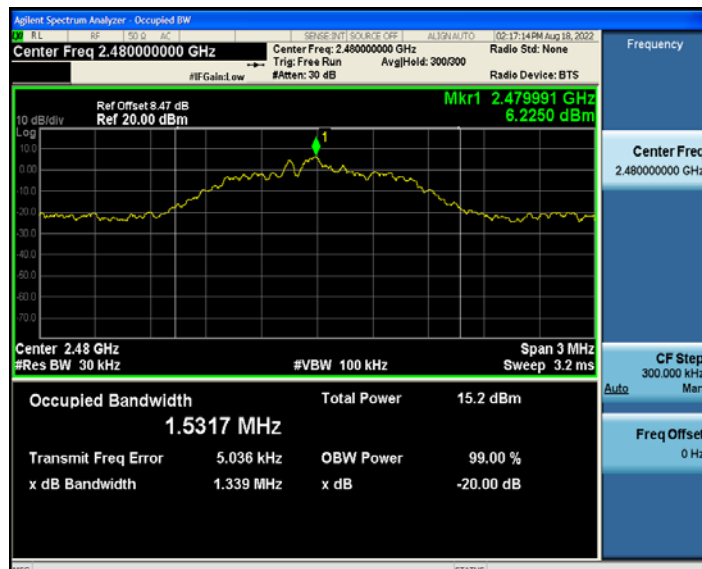

5.4 Conducted peak output power

5.4.1 Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.




5.4.2 Test setup




5.4.3 Test procedure

- Test method: ANSI C63.10-2013 Section 7.8.5.
- The EUT was set to continuously transmitting in the max power during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW > 20dB occupied bandwidth, VBW ≥ RBW, detector= Peak

5.4.4 Test results


Mode	Test channel	Frequency (MHz)	Conducted peak output power (dBm)	Limit (dBm)
GFSK	CH0	2402	5.38	≤ 20.97
	CH39	2441	5.48	≤ 20.97
	CH78	2480	5.43	≤ 20.97
π/4-DQPSK	CH0	2402	6.67	≤ 20.97
	CH39	2441	6.77	≤ 20.97
	CH78	2480	6.70	≤ 20.97
8DPSK	CH0	2402	7.18	≤ 20.97
	CH39	2441	7.29	≤ 20.97
	CH78	2480	7.20	≤ 20.97

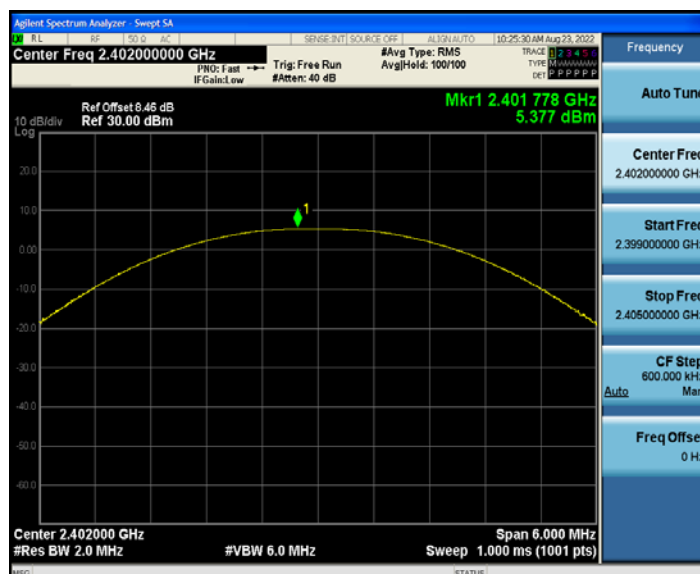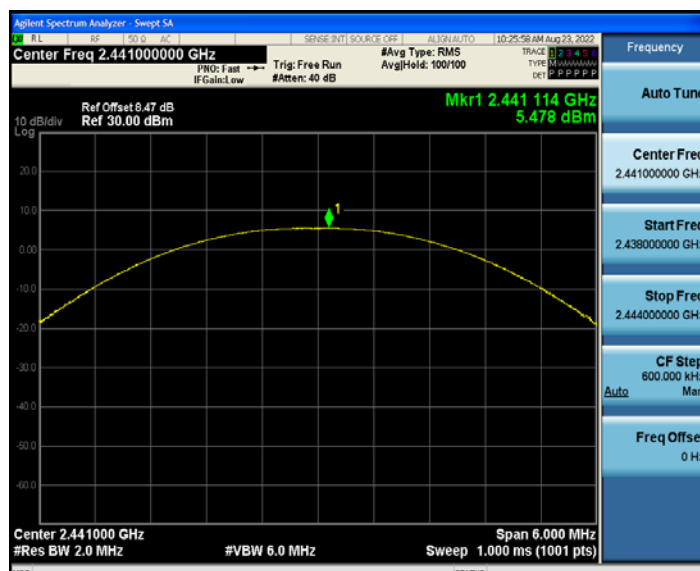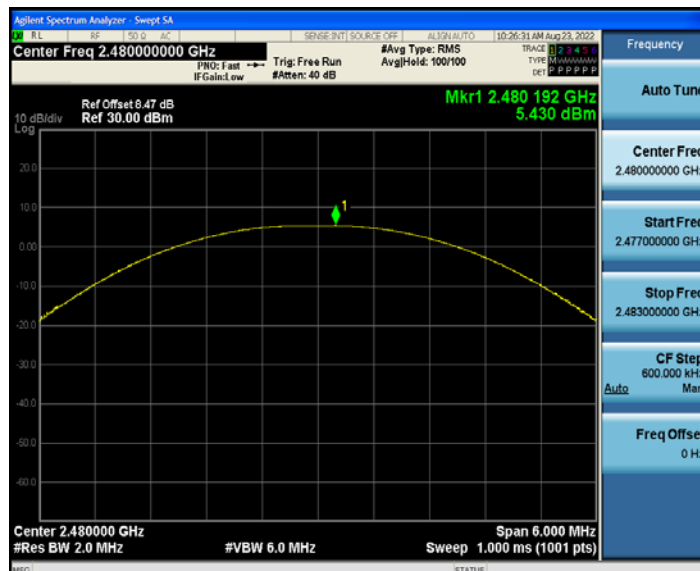GFSK mode - peak conducted output power
CH0

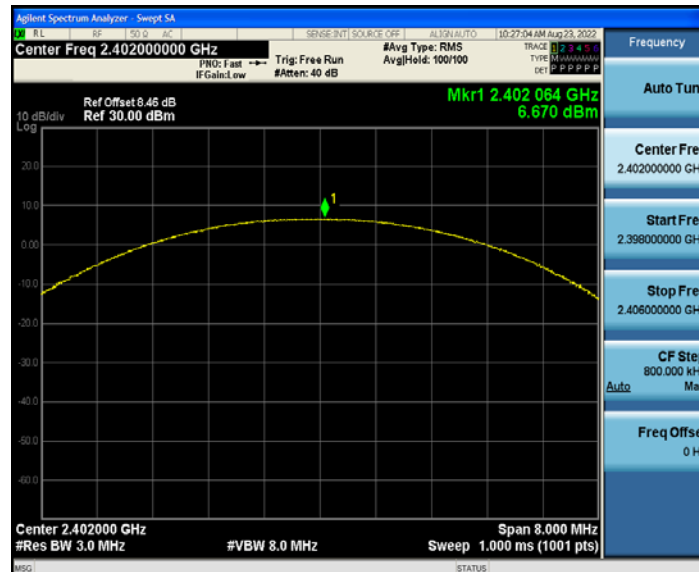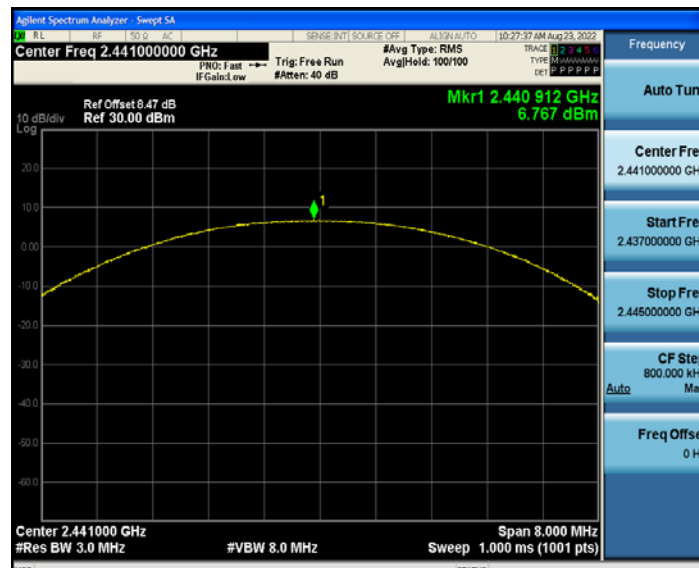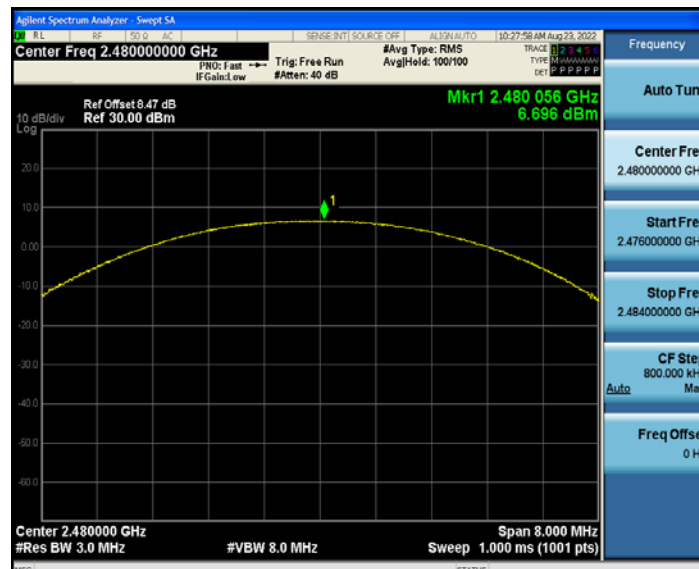CH39

CH78


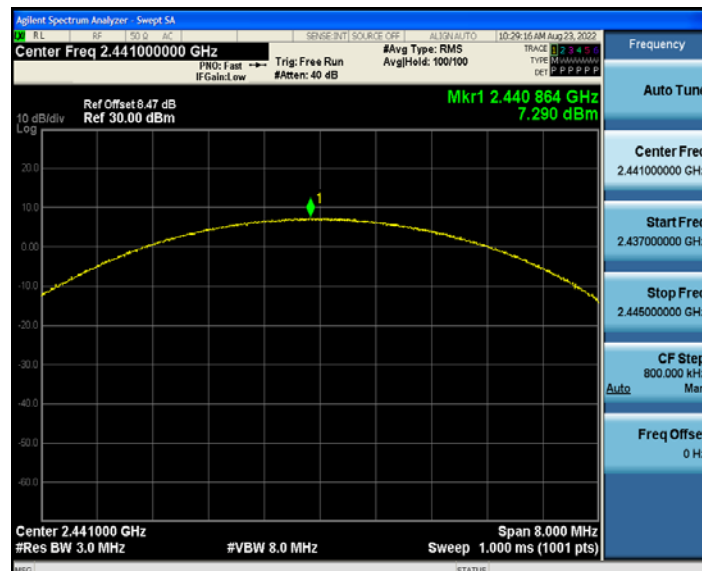
$\pi/4$ -DQPSK mode - peak conducted output power
CH0

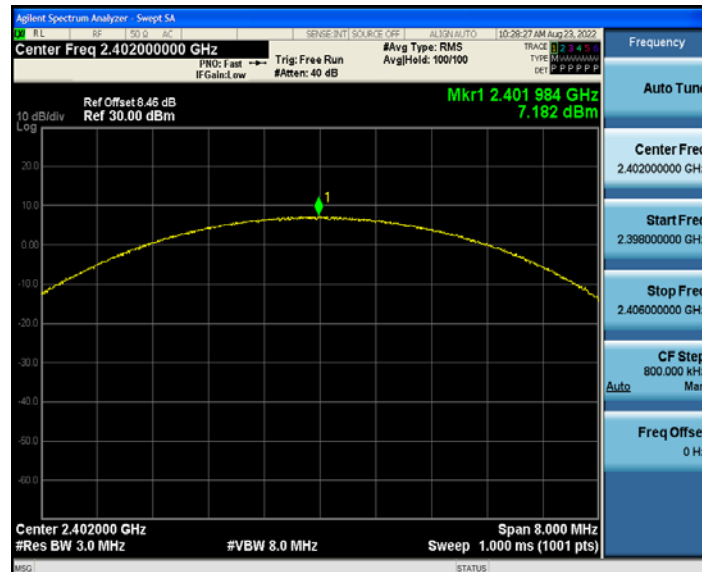CH39

CH78


8DPSK mode – peak conducted output power


CH0



CH39



CH78

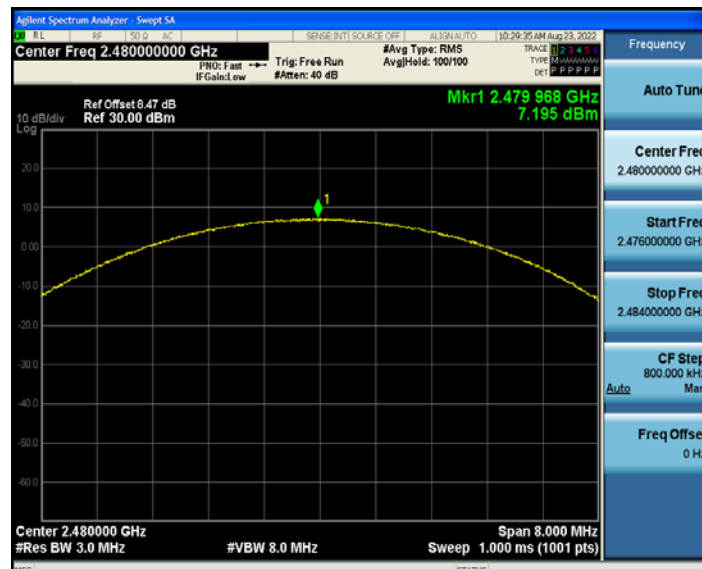


5.5 Carrier frequency separation

5.5.1 Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater

5.5.2 Test setup



5.5.3 Test procedure


- Test method: ANSI C63.10-2013 Section 7.8.2.
- The EUT was set to hopping mode during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum Setting: RBW = 30 kHz, VBW = 100 kHz, detector= Peak.

5.5.4 Test results


Mode	Test channel	Test Result (MHz)	Limit (MHz)	Result
GFSK	Hop-mode	0.998	≥ 0.621	Pass
$\pi/4$ -DQPSK	Hop-mode	1	≥ 0.897	Pass
8DPSK	Hop-mode	1.002	≥ 0.896	Pass

Carrier frequency separation


GFSK

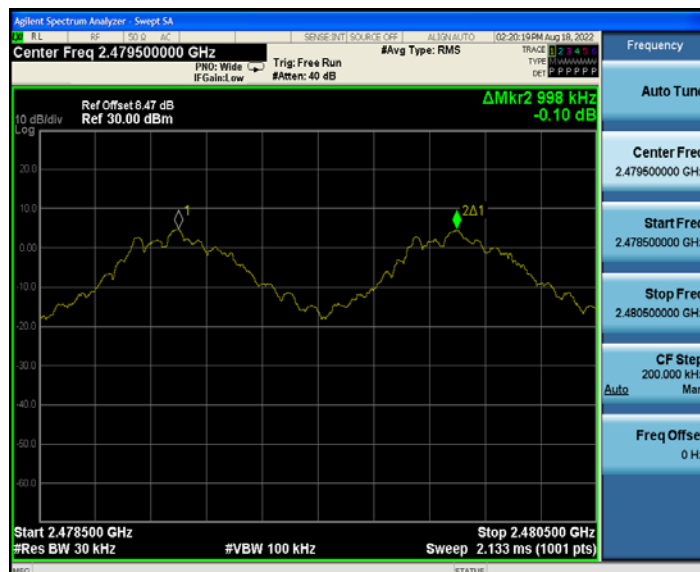

$\pi/4$ -DQPSK

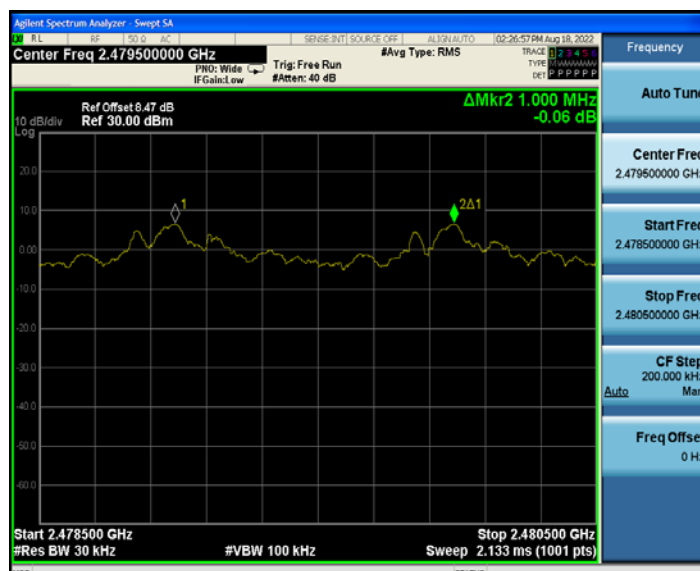

8DPSK

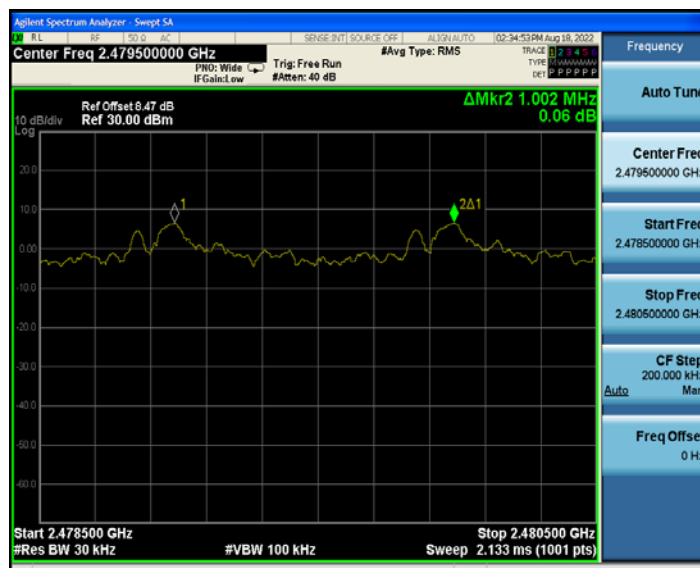


5.6 Average time of occupancy

5.6.1 Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

5.6.2 Test setup



5.6.3 Test procedure

- Test method: ANSI C63.10-2013 Section 7.8.4
- The EUT was set to hopping mode during the test.
- The tranistter output of EUT is connneted to the specturm analyzer.
- Spectrum analyzer setting: RBW = 1MHz, VBW = 3MHz, Span = 0Hz, Detector = Peak, weep time: As necessary to capture the entire dwell time per hopping channel.
- Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:
- The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

5.6.4 Test results


Mode	Data Packet	Frequency (MHz)	Pulse width (ms)	Number of pulses in 3.16 s	Average time of occupancy (s)	Limit (s)	Result
GFSK	DH1	2441	0.403	11	0.04433	<=0.4	Pass
	DH3	2441	1.659	11	0.18249	<=0.4	Pass
	DH5	2441	2.907	11	0.31977	<=0.4	Pass
$\pi/4$ -DQPSK	2DH1	2441	0.409	11	0.04499	<=0.4	Pass
	2DH3	2441	1.661	11	0.18271	<=0.4	Pass
	2DH5	2441	2.910	11	0.3201	<=0.4	Pass
8DPSK	3DH1	2441	0.409	11	0.04499	<=0.4	Pass
	3DH3	2441	1.661	11	0.18271	<=0.4	Pass
	3DH5	2441	2.911	11	0.32021	<=0.4	Pass

Notes:


- Period time = 0.4 (s) * 79 = 31.6(s)
- Average time of occupancy = Pulse width * Number of pulses in 3.16s * 10

GFSK mode - Average time of occupancy


Pulse width – DH1

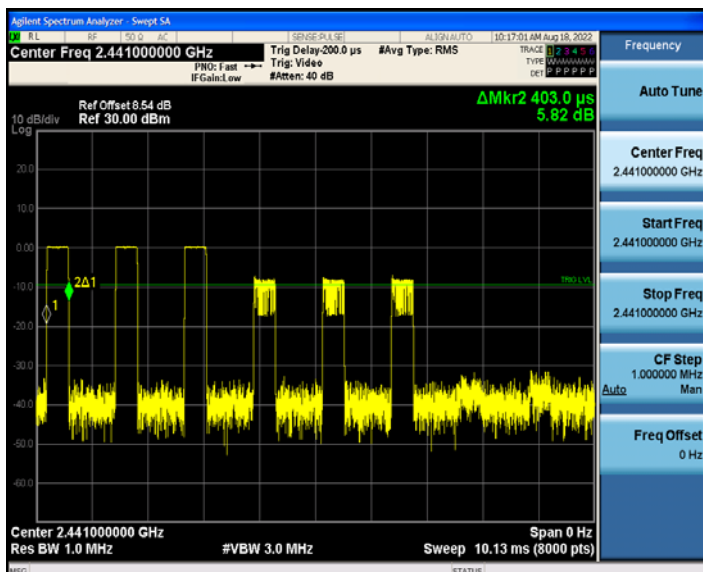


Number of pulses in 3.16 s – DH1

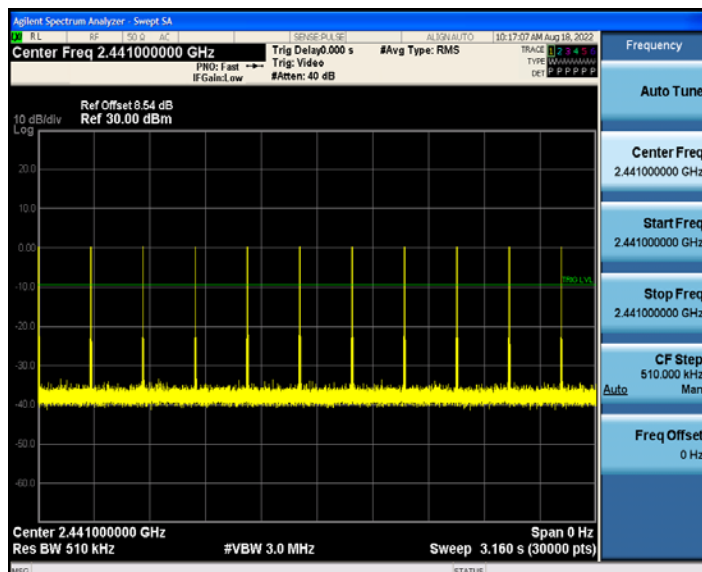


Pulse width – DH3

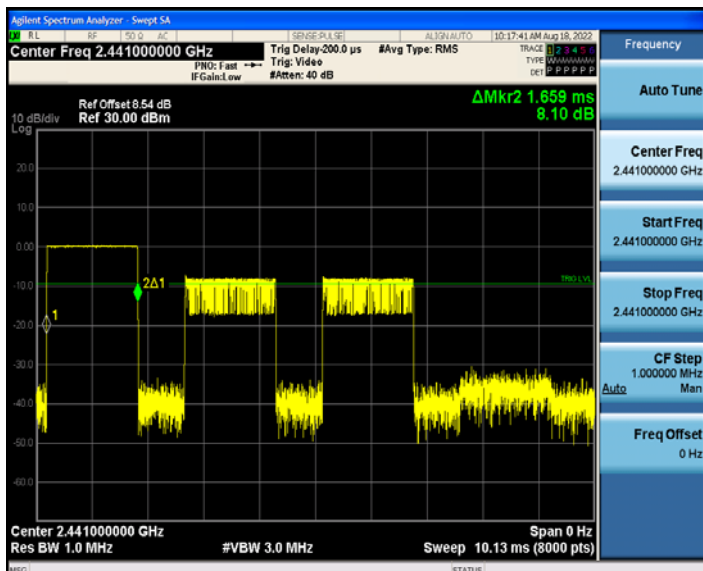

Number of pulses in 3.16 s – DH3

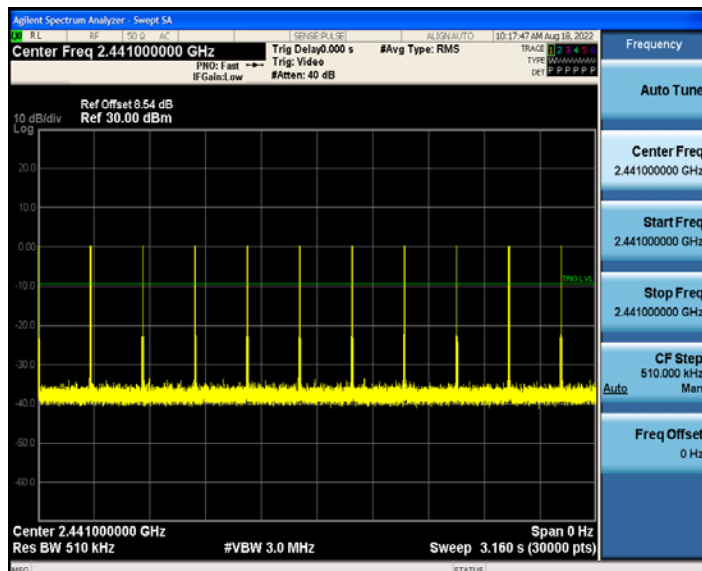

Pulse width – DH5

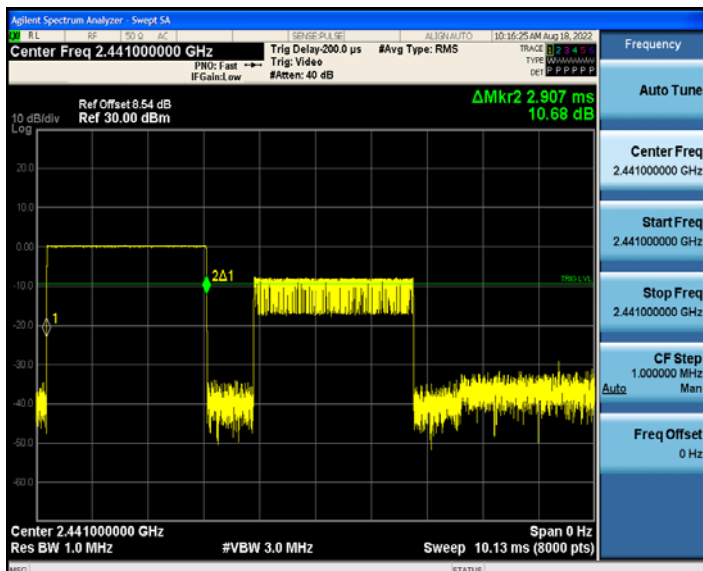

Number of pulses in 3.16 s – DH5

