



Appendix A. Test Result of AC Power Line Conducted Emission

Antenna 1

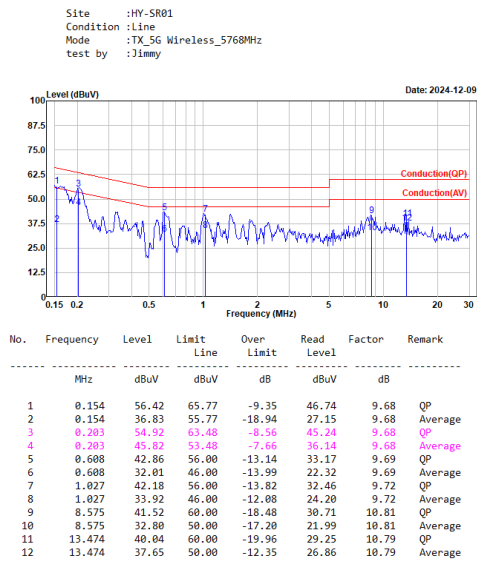


Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

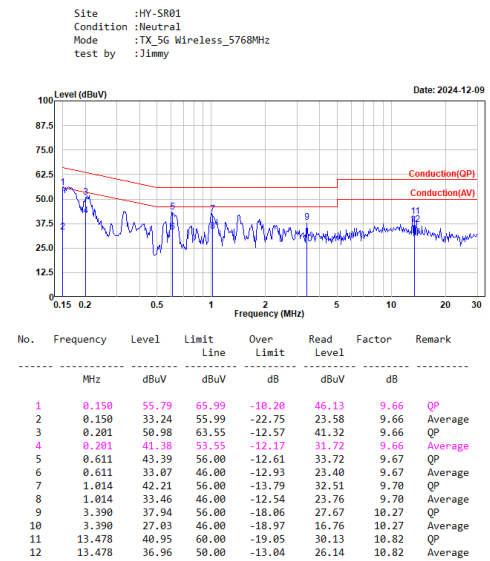


Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Antenna 2

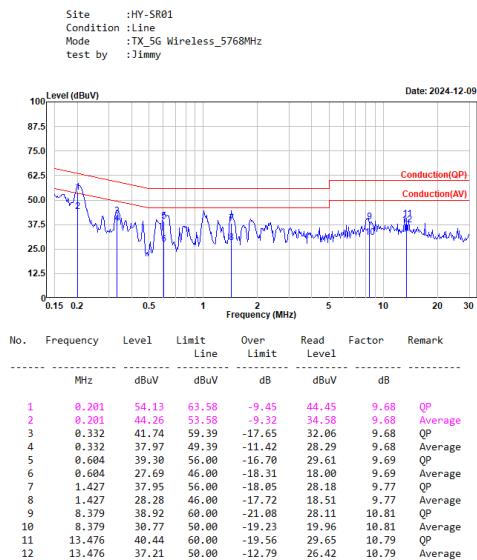

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

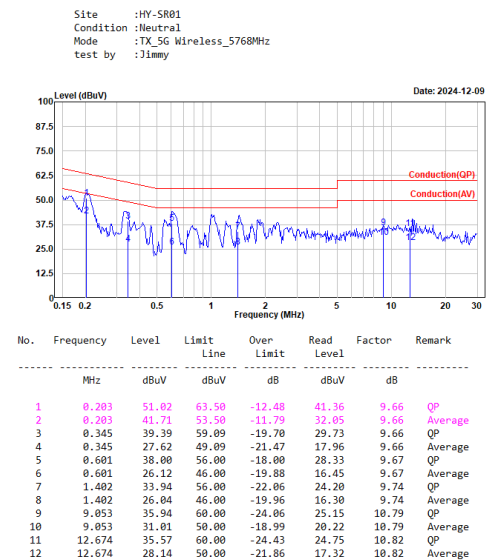

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of Emission Bandwidth

Antenna 1

Modulation	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
OFDM	5745	9111	>500	Pass
	5768	7992	>500	Pass
	5791	8472	>500	Pass

Antenna 2

Modulation	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
OFDM	5745	7952	>500	Pass
	5768	8591	>500	Pass
	5791	9111	>500	Pass

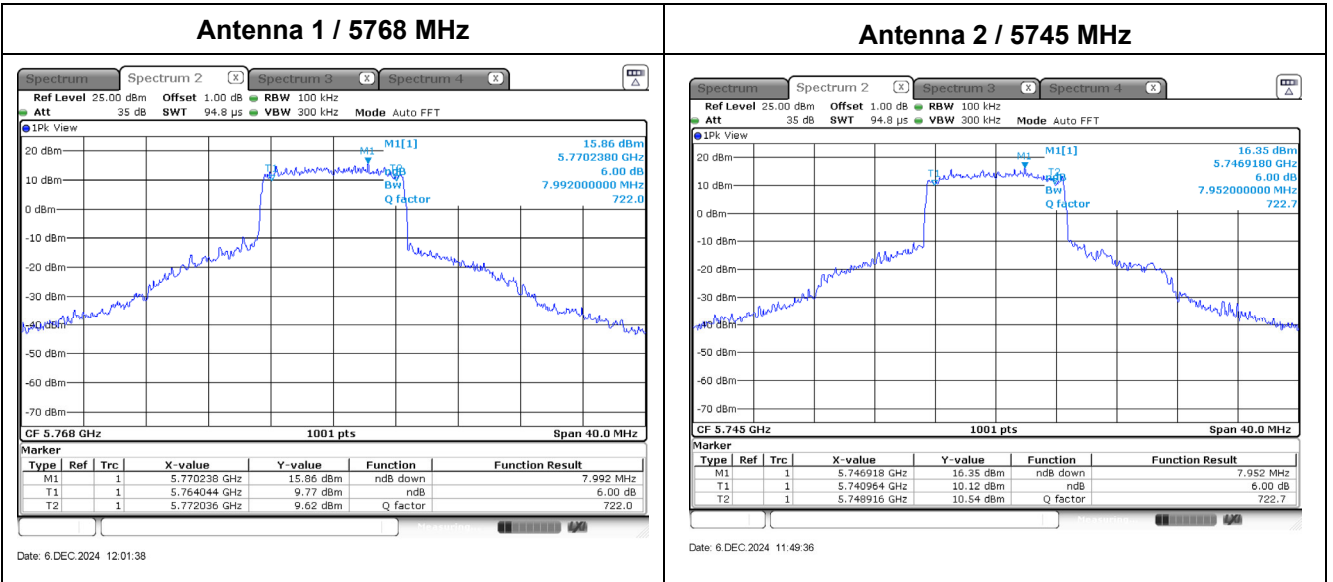

Appendix C. Test Result of Maximum Conducted Output Power**Antenna 1**

Modulation	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
OFDM	5745	23.02	30	Pass
	5768	22.94	30	Pass
	5791	23.85	30	Pass

Antenna 2

Modulation	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
OFDM	5745	23.77	30	Pass
	5768	22.86	30	Pass
	5791	23.72	30	Pass


Appendix D. Test Result of Maximum Power Spectral Density

Antenna 1

Modulation	Frequency (MHz)	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Limit (dBm)	Result
OFDM	5745	13.46	0.38	13.84	30	Pass
	5768	13.01	0.38	13.39	30	Pass
	5791	15.12	0.38	15.50	30	Pass

Antenna 2


Modulation	Frequency (MHz)	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Limit (dBm)	Result
OFDM	5745	13.31	0.37	13.68	30	Pass
	5768	12.86	0.37	13.23	30	Pass
	5791	14.35	0.37	14.72	30	Pass

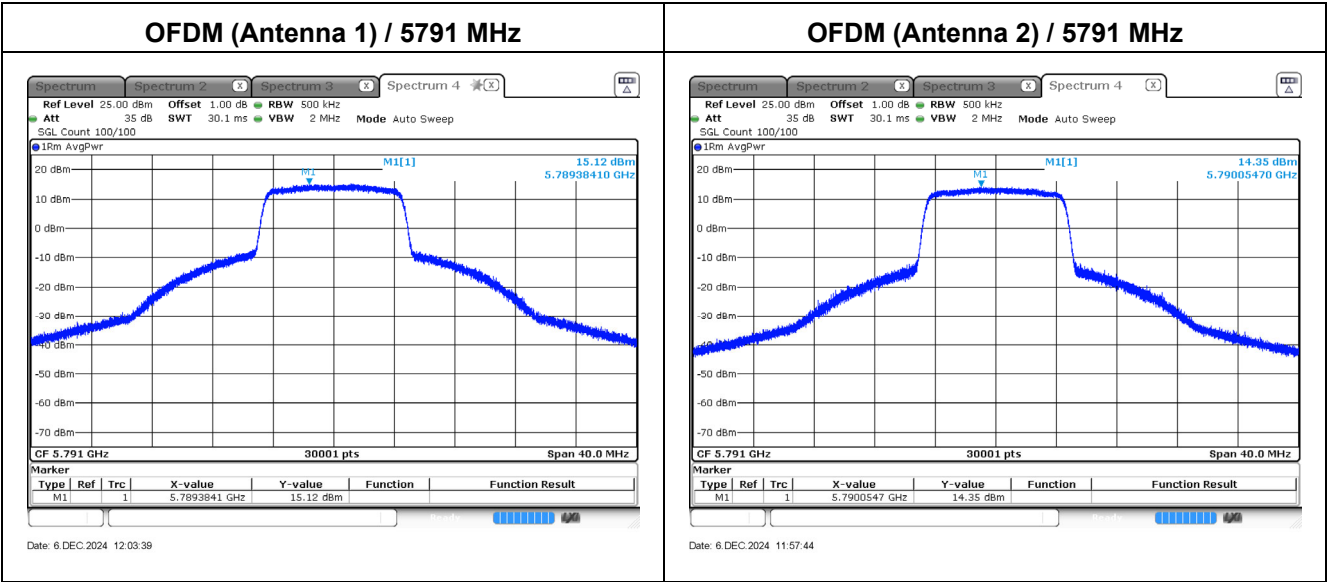

Appendix E. Test Result of Transmitter Radiated Spurious Emission

Antenna 1

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_5745MHz
Test BY :Bob

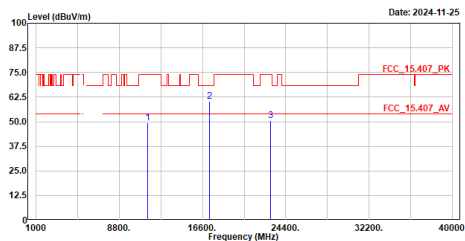


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	49.54	74.00	-24.46	50.80	-1.26	Peak
2	17235.000	60.19	68.22	-8.03	60.65	-0.46	Peak
3	22980.000	50.50	74.00	-23.50	43.41	7.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_5745MHz
Test BY :Bob

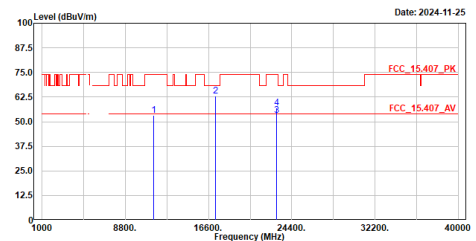


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	53.09	74.00	-20.91	54.35	-1.26	Peak
2	17235.000	63.10	68.22	-5.12	63.56	-0.46	Peak
3	22980.000	53.10	54.00	-0.90	46.01	7.09	Average
4	22980.000	56.89	74.00	-17.11	49.80	7.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_5768MHz
Test BY :Bob

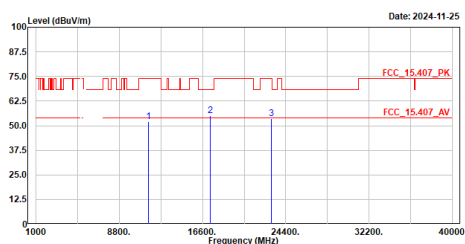


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11536.000	51.89	74.00	-22.11	53.03	-1.14	Peak
2	17304.000	55.03	68.22	-13.19	55.01	0.02	Peak
3	23072.000	53.50	74.00	-20.50	46.24	7.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_5768MHz
Test BY :Bob

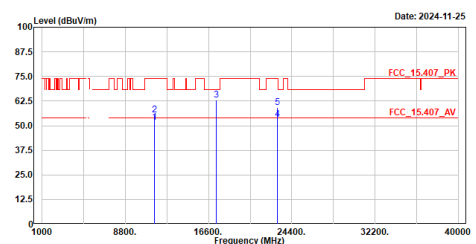


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11536.000	51.88	54.00	-2.12	53.02	-1.14	Average
2	11536.000	55.65	74.00	-18.35	56.79	-1.14	Peak
3	17304.000	63.14	68.22	-5.08	63.12	0.02	Peak
4	23072.000	53.33	54.00	-0.67	46.07	7.26	Average
5	23072.000	59.11	74.00	-14.89	51.85	7.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_5791MHz
Test BY :Bob

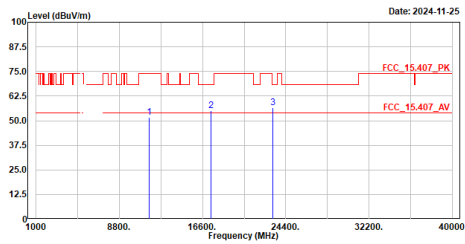

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11582.000	51.78	74.00	-22.22	52.93	-1.15	Peak
2	17373.000	55.19	68.22	-13.03	55.09	0.10	Peak
3	23164.000	56.72	68.22	-11.50	49.42	7.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_5791MHz
Test BY :Bob

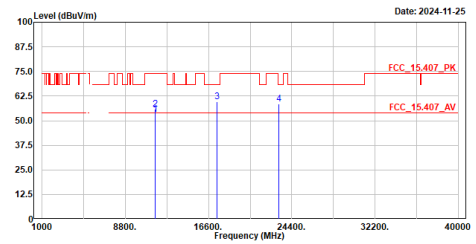

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11582.000	53.31	54.00	-0.69	54.46	-1.15	Average
2	11582.000	55.98	74.00	-18.02	57.13	-1.15	Peak
3	17373.000	59.73	68.22	-8.49	59.63	0.10	Peak
4	23164.000	58.50	68.22	-9.72	51.20	7.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_5768MHz
Test BY :Bob

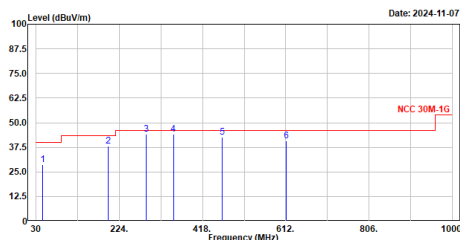

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	44.550	28.50	40.00	-11.50	52.10	-23.60	QP
2	197.810	38.26	43.50	-5.24	64.92	-26.66	QP
3	287.050	44.02	46.00	-1.98	67.20	-23.18	QP
4	350.100	44.13	46.00	-1.87	65.90	-21.77	QP
5	464.560	42.83	46.00	-3.17	61.20	-18.37	QP
6	612.970	40.74	46.00	-5.26	56.04	-15.30	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_5768MHz
Test BY :Bob

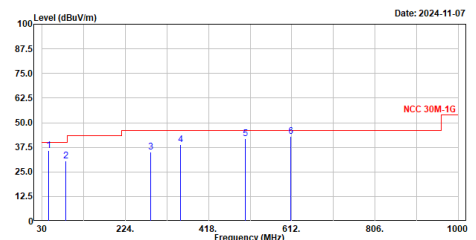

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	44.550	35.70	40.00	-4.30	59.30	-23.60	QP
2	85.290	30.55	40.00	-9.45	60.35	-29.80	QP
3	283.170	35.28	46.00	-10.72	58.55	-23.27	QP
4	353.010	38.82	46.00	-7.18	60.53	-21.71	QP
5	504.330	41.93	46.00	-4.07	59.70	-17.77	QP
6	609.090	42.85	46.00	-3.15	58.14	-15.29	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_5745MHz
Test BY :Bob

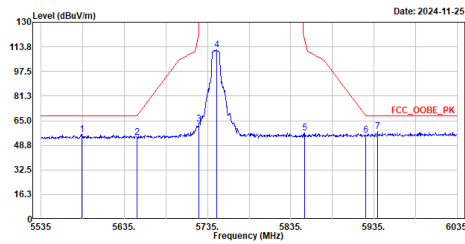


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5584.000	55.89	68.20	-12.31	38.87	17.02	Peak
2	5650.000	53.99	68.21	-14.22	36.80	17.19	Peak
3	5725.000	62.66	122.20	-59.54	45.00	17.66	Peak
4	5745.000	112.08	-----	-----	94.27	17.81	Peak
5	5851.500	56.93	118.78	-61.85	39.00	17.93	Peak
6	5925.000	55.49	68.21	-12.72	37.57	17.92	Peak
7	5939.000	57.83	68.20	-10.37	39.89	17.94	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_5745MHz
Test BY :Bob

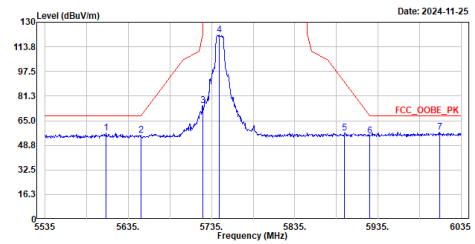


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5608.500	57.05	68.20	-11.15	39.95	17.10	Peak
2	5650.000	55.20	68.21	-13.01	38.01	17.19	Peak
3	5724.500	75.21	121.06	-45.85	57.55	17.66	Peak
4	5744.000	121.55	-----	-----	103.77	17.78	Peak
5	5895.000	56.95	90.40	-33.45	39.06	17.89	Peak
6	5925.000	55.15	68.21	-13.06	37.23	17.92	Peak
7	6009.000	57.38	68.20	-10.82	39.30	18.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_5768MHz
Test BY :Bob

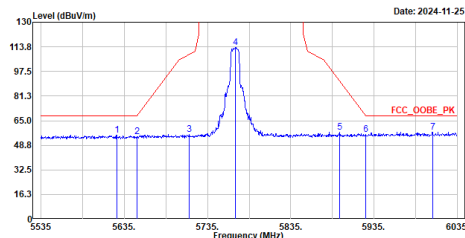


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5626.000	55.40	68.20	-12.80	38.27	17.13	Peak
2	5650.000	54.36	68.21	-13.85	37.17	17.19	Peak
3	5713.000	55.83	108.84	-53.01	38.25	17.58	Peak
4	5768.500	113.28	-----	-----	95.43	17.85	Peak
5	5893.500	57.35	91.51	-34.16	39.46	17.89	Peak
6	5925.000	55.73	68.21	-12.48	37.81	17.92	Peak
7	6005.500	57.62	68.20	-10.58	39.55	18.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_5768MHz
Test BY :Bob

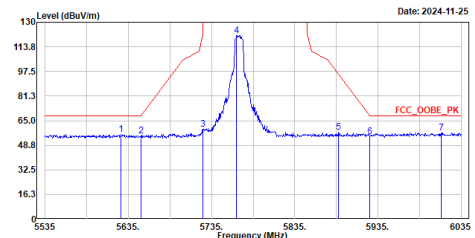


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5626.500	55.71	68.20	-12.49	38.57	17.14	Peak
2	5650.000	54.89	68.21	-13.32	37.70	17.19	Peak
3	5725.000	59.19	122.20	-63.01	41.53	17.66	Peak
4	5765.000	121.40	-----	-----	103.55	17.85	Peak
5	5887.500	57.63	95.95	-38.32	39.72	17.91	Peak
6	5925.000	54.62	68.21	-13.59	36.70	17.92	Peak
7	6011.000	56.97	68.20	-11.23	38.89	18.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_5791MHz
Test BY :Bob

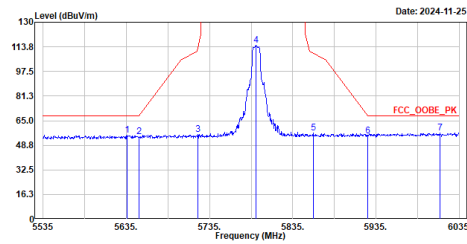


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5636.000	55.62	68.20	-12.58	38.46	17.16	Peak
2	5650.000	54.47	68.21	-13.74	37.28	17.19	Peak
3	5721.000	55.81	113.08	-57.27	38.18	17.63	Peak
4	5790.500	114.63	-----	-----	96.75	17.88	Peak
5	5859.500	56.89	109.54	-52.65	38.97	17.92	Peak
6	5925.000	55.05	68.21	-13.16	37.13	17.92	Peak
7	6011.500	56.92	68.20	-11.28	38.83	18.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_5791MHz
Test BY :Bob

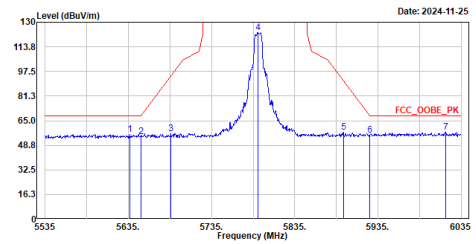


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5636.500	56.03	68.20	-12.17	38.86	17.17	Peak
2	5650.000	54.31	68.21	-13.90	37.12	17.19	Peak
3	5686.500	56.55	95.21	-38.66	39.17	17.38	Peak
4	5790.500	123.11	-----	-----	105.23	17.88	Peak
5	5893.500	57.22	91.51	-34.29	39.33	17.89	Peak
6	5925.000	55.53	68.21	-12.68	37.61	17.92	Peak
7	6016.000	57.30	68.20	-10.90	39.20	18.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Antenna 2

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_5745MHz
Test BY :Bob

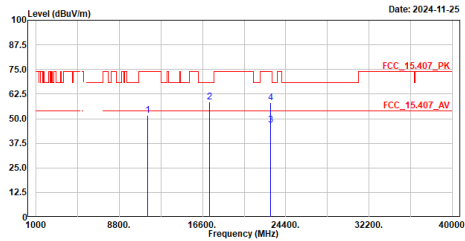


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	11490.000	51.65	74.00	-22.35	52.91	-1.26	Peak
2	17235.000	58.57	68.22	-9.65	59.03	-0.46	Peak
3	22980.000	46.74	54.00	-7.26	39.65	7.09	Average
4	22980.000	58.13	74.00	-15.87	51.04	7.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_5745MHz
Test BY :Bob

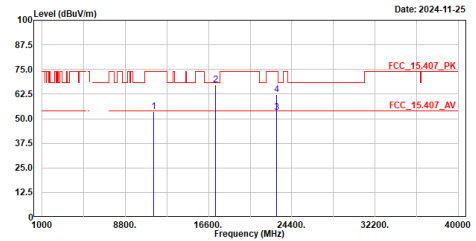


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	11490.000	53.43	74.00	-20.57	54.69	-1.26	Peak
2	17235.000	67.11	68.22	-1.11	67.57	-0.46	Peak
3	22980.000	53.39	54.00	-0.61	46.30	7.09	Average
4	22980.000	62.12	74.00	-11.88	55.03	7.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_5768MHz
Test BY :Bob

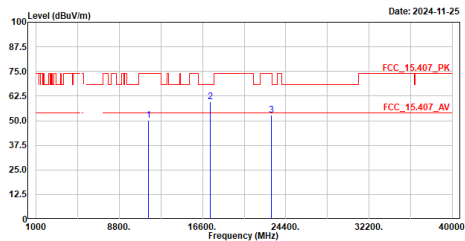


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	11536.000	50.04	74.00	-23.96	51.18	-1.14	Peak
2	17304.000	59.66	68.22	-8.56	59.64	0.02	Peak
3	23072.000	52.92	74.00	-21.08	45.66	7.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_5768MHz
Test BY :Bob

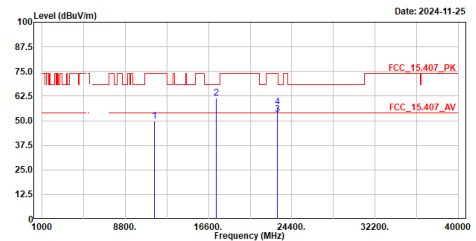


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	11536.000	49.99	74.00	-24.01	51.13	-1.14	Peak
2	17304.000	61.64	68.22	-6.58	61.62	0.02	Peak
3	23072.000	53.08	54.00	-0.92	45.82	7.26	Average
4	23072.000	57.08	74.00	-16.92	49.82	7.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_5791MHz
Test BY :Bob

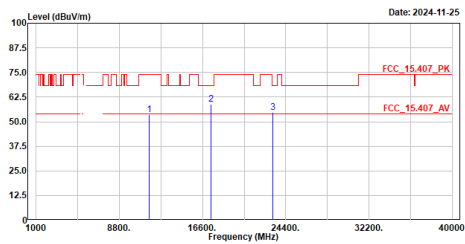


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
			dBuV/m	dB	dBuV		
1	11582.000	53.76	74.00	-20.24	54.91	-1.15	Peak
2	17373.000	58.90	68.22	-9.32	58.80	0.10	Peak
3	23164.000	54.55	68.22	-13.67	47.25	7.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_5791MHz
Test BY :Bob

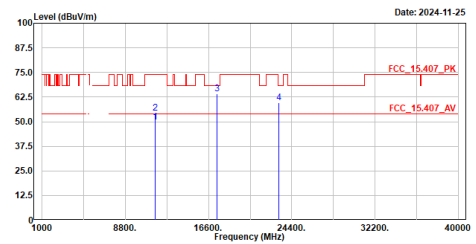


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
			dBuV/m	dB	dBuV		
1	11582.000	49.66	54.00	-4.34	50.81	-1.15	Average
2	11582.000	54.16	74.00	-19.84	55.31	-1.15	Peak
3	17373.000	64.28	68.22	-3.94	64.18	0.10	Peak
4	23164.000	59.64	68.22	-8.58	52.34	7.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_5768MHz
Test BY :Bob

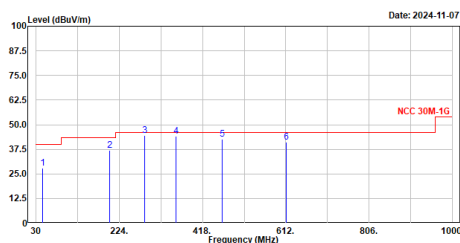


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
			dBuV/m	dB	dBuV		
1	44.550	28.00	40.00	-12.00	51.60	-23.60	QP
2	201.690	37.16	43.50	-6.34	63.77	-26.61	QP
3	283.170	44.52	46.00	-1.48	67.79	-23.27	QP
4	355.920	44.04	46.00	-1.96	65.70	-21.66	QP
5	464.560	42.63	46.00	-3.37	61.00	-18.37	QP
6	612.970	40.94	46.00	-5.06	56.24	-15.30	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_5768MHz
Test BY :Bob

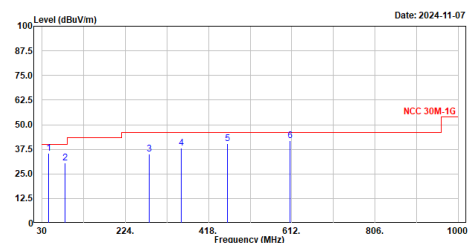


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
			dBuV/m	dB	dBuV		
1	44.550	35.40	40.00	-4.60	59.00	-23.60	QP
2	84.320	30.59	40.00	-9.41	60.33	-29.74	QP
3	280.260	35.24	46.00	-10.76	58.65	-23.41	QP
4	353.980	38.15	46.00	-7.85	59.84	-21.69	QP
5	462.620	40.39	46.00	-5.61	58.80	-18.41	QP
6	608.120	42.03	46.00	-3.97	57.29	-15.26	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_5745MHz
Test BY :Bob

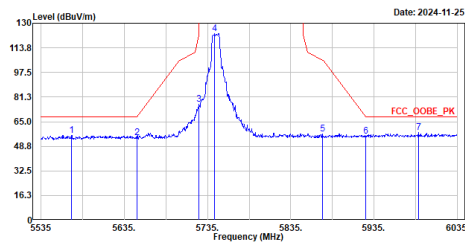


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5571.500	56.17	68.20	-12.03	39.23	16.94	Peak
2	5650.000	54.44	68.21	-13.77	37.25	17.19	Peak
3	5725.000	76.33	122.20	-45.87	58.67	17.66	Peak
4	5743.500	123.09	-----	-----	105.31	17.78	Peak
5	5873.000	57.12	105.76	-48.64	39.21	17.91	Peak
6	5925.000	55.53	68.21	-12.68	37.61	17.92	Peak
7	5988.500	57.65	68.20	-10.55	39.62	18.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_5745MHz
Test BY :Bob

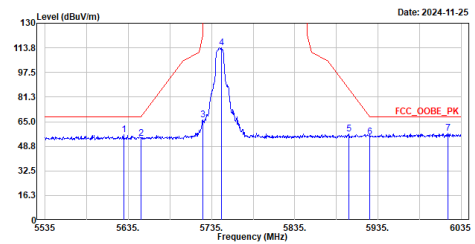


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5629.500	56.20	68.20	-12.00	39.05	17.15	Peak
2	5650.000	53.78	68.21	-14.43	36.59	17.19	Peak
3	5724.500	66.12	121.06	-54.94	48.46	17.66	Peak
4	5747.000	113.73	-----	-----	95.92	17.81	Peak
5	5900.000	56.80	86.70	-29.90	38.91	17.89	Peak
6	5925.000	55.09	68.21	-13.12	37.17	17.92	Peak
7	6019.000	57.25	68.20	-10.95	39.14	18.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_5768MHz
Test BY :Bob

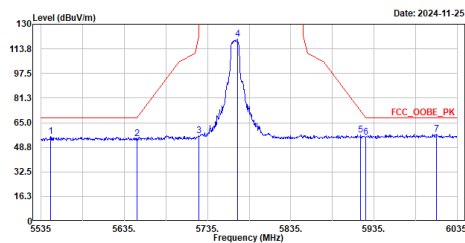


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5546.500	55.77	68.20	-12.43	39.02	16.75	Peak
2	5650.000	54.28	68.21	-13.93	37.09	17.19	Peak
3	5725.000	56.19	122.20	-66.01	38.53	17.66	Peak
4	5771.500	120.24	-----	-----	102.38	17.86	Peak
5	5919.000	56.82	72.65	-15.83	38.90	17.92	Peak
6	5925.000	55.67	68.21	-12.54	37.75	17.92	Peak
7	6010.500	57.36	68.20	-10.84	39.28	18.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_5768MHz
Test BY :Bob

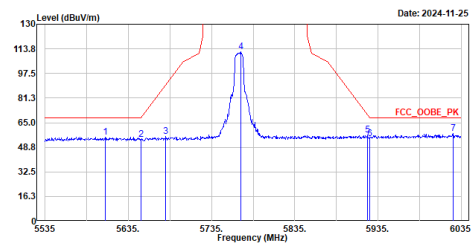


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5607.000	55.46	68.20	-12.74	38.36	17.10	Peak
2	5650.000	54.14	68.21	-14.07	36.95	17.19	Peak
3	5680.000	55.09	90.40	-34.51	38.56	17.33	Peak
4	5770.000	111.77	-----	-----	93.91	17.86	Peak
5	5922.000	56.76	70.43	-13.67	38.84	17.92	Peak
6	5925.000	54.38	68.21	-13.83	36.46	17.92	Peak
7	6025.000	57.76	68.20	-10.44	39.64	18.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_5791MHz
Test BY :Bob

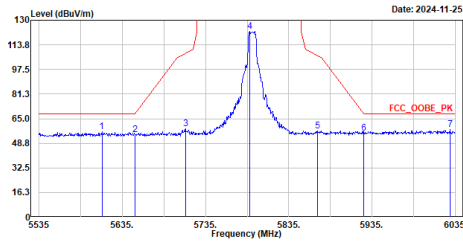

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5610.500	56.33	68.20	-11.87	39.22	17.11	Peak
2	5650.000	54.39	68.21	-13.82	37.20	17.19	Peak
3	5711.000	58.29	108.28	-49.99	40.74	17.55	Peak
4	5788.500	122.77	-	-	104.89	17.88	Peak
5	5870.000	56.99	106.60	-49.61	39.07	17.92	Peak
6	5925.000	55.57	68.21	-12.64	37.65	17.92	Peak
7	6028.500	57.77	68.20	-10.43	39.64	18.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_5791MHz
Test BY :Bob

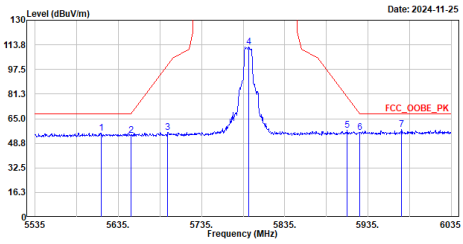

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5614.500	55.66	68.20	-12.54	38.54	17.12	Peak
2	5650.000	53.86	68.21	-14.35	36.67	17.19	Peak
3	5694.500	55.93	101.13	-45.20	38.49	17.44	Peak
4	5791.500	112.31	-	-	94.43	17.88	Peak
5	5910.000	57.15	79.31	-22.16	39.24	17.91	Peak
6	5925.000	55.88	68.21	-12.33	37.96	17.92	Peak
7	5975.500	57.91	68.20	-10.29	39.91	18.00	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.