

GSM850_GPRS11_Right Cheek_128**DUT: EUT**

Communication System: UID 0, GPRS 850-3solt; Frequency: 824.2 MHz;Duty Cycle: 1:2.67

Medium: H835 Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.19, 10.19, 10.19) @ 824.2 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.287 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.721 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.209 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.2%

Maximum value of SAR (measured) = 0.297 W/kg

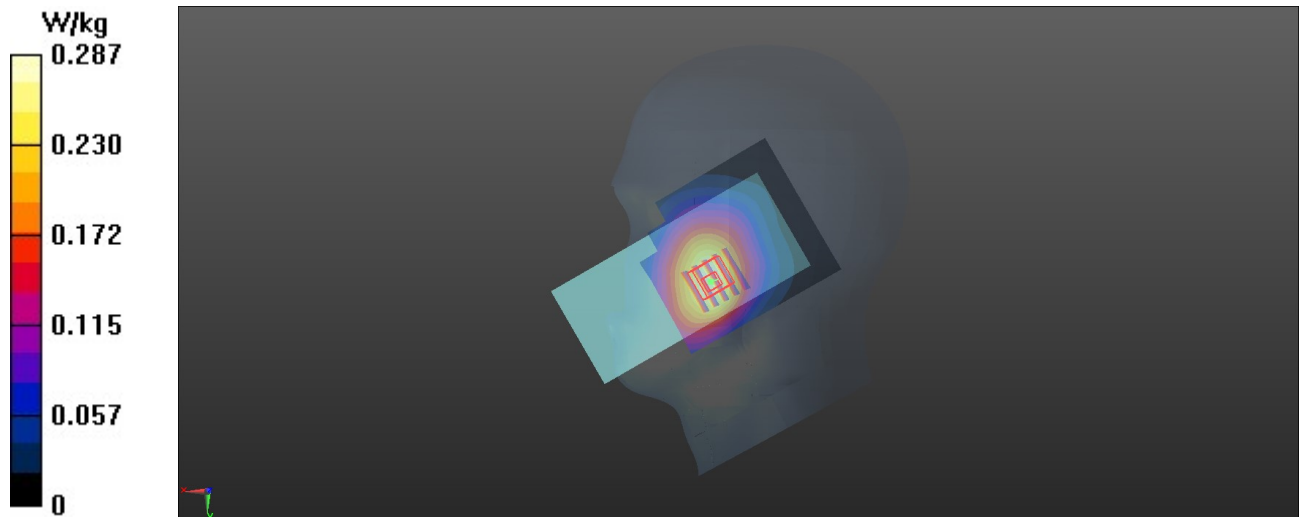

P02 GSM1900_GPRS11_Left Cheek_Ch661**DUT: EUT**

Communication System: UID 0, GPRS11; Frequency: 1880 MHz; Duty Cycle: 1:2.67

Medium: H1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.438$ S/m; $\epsilon_r = 39.933$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.8, 7.8, 7.8) @ 1880 MHz; Calibrated: 2023/6/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.0604 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.020 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.0700 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.027 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 62.8%

Maximum value of SAR (measured) = 0.0588 W/kg

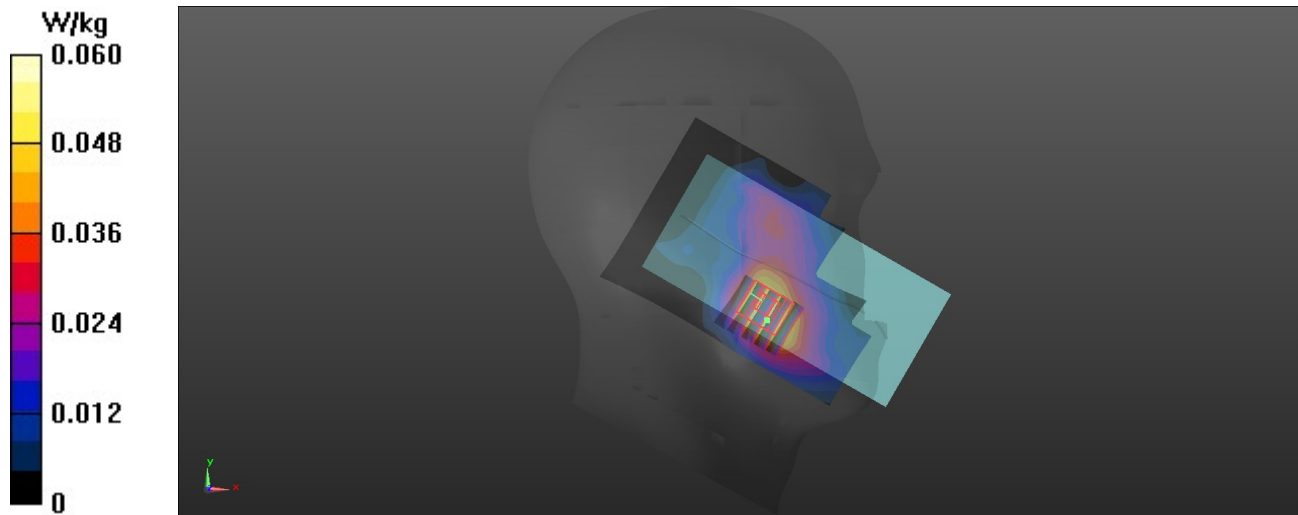

WCDMA II_RMC12.2K_Left Cheek_9400**DUT: EUT**

Communication System: UID 0, WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used : $f = 1880$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35) @ 1880 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0644 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.905 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.0910 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.034 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 62.2%

Maximum value of SAR (measured) = 0.0657 W/kg

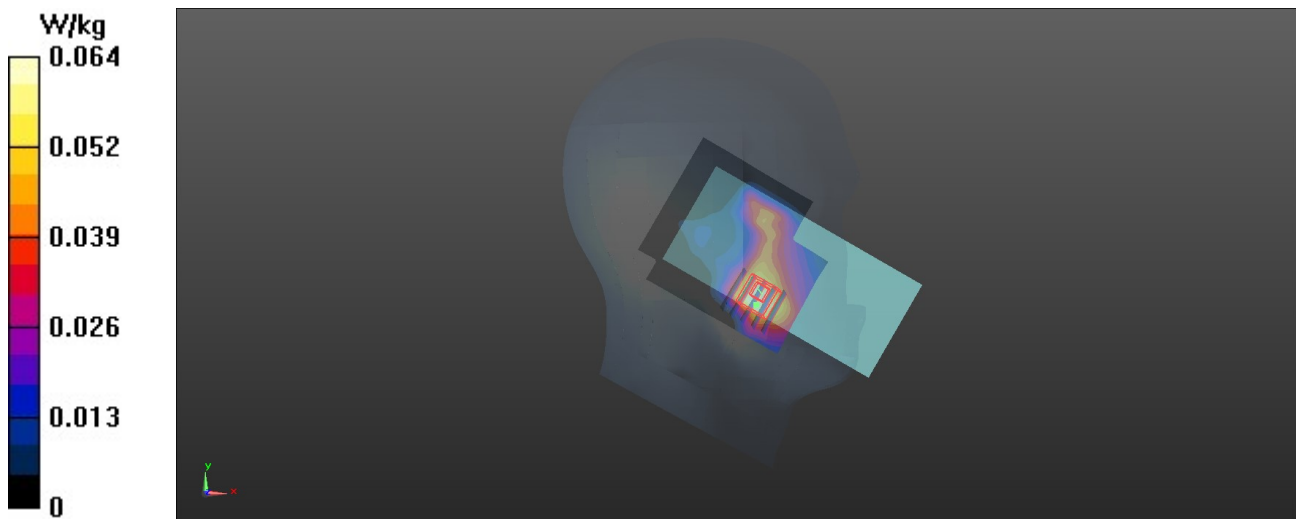

WCDMA IV_RMC12.2K_Left Tilted_1413**DUT: EUT**

Communication System: UID 0, WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.364 \text{ S/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.66, 8.66, 8.66) @ 1732.6 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0754 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.018 V/m ; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.061 W/kg ; SAR(10 g) = 0.038 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 64.7%

Maximum value of SAR (measured) = 0.0714 W/kg

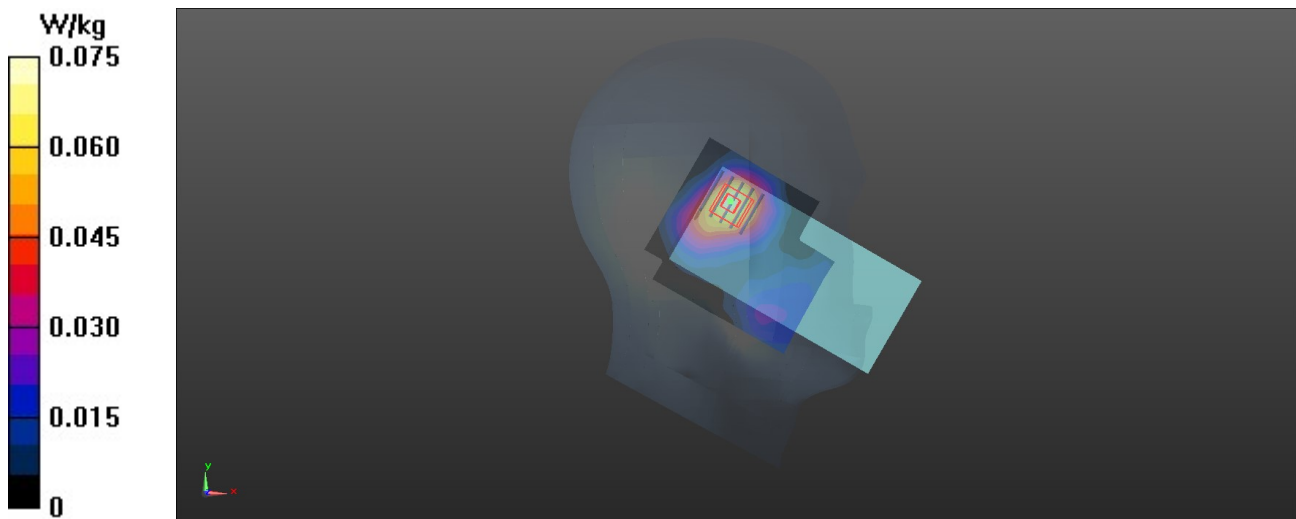

P05 WCDMA V_RMC12.2K_Right Cheek_Ch4233**DUT: EUT**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 847$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 40.904$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(9.5, 9.5, 9.5) @ 846.6 MHz; Calibrated: 2023/6/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.315 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.651 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.341 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.202 W/kg

Smallest distance from peaks to all points 3 dB below = 25.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.6%

Maximum value of SAR (measured) = 0.312 W/kg

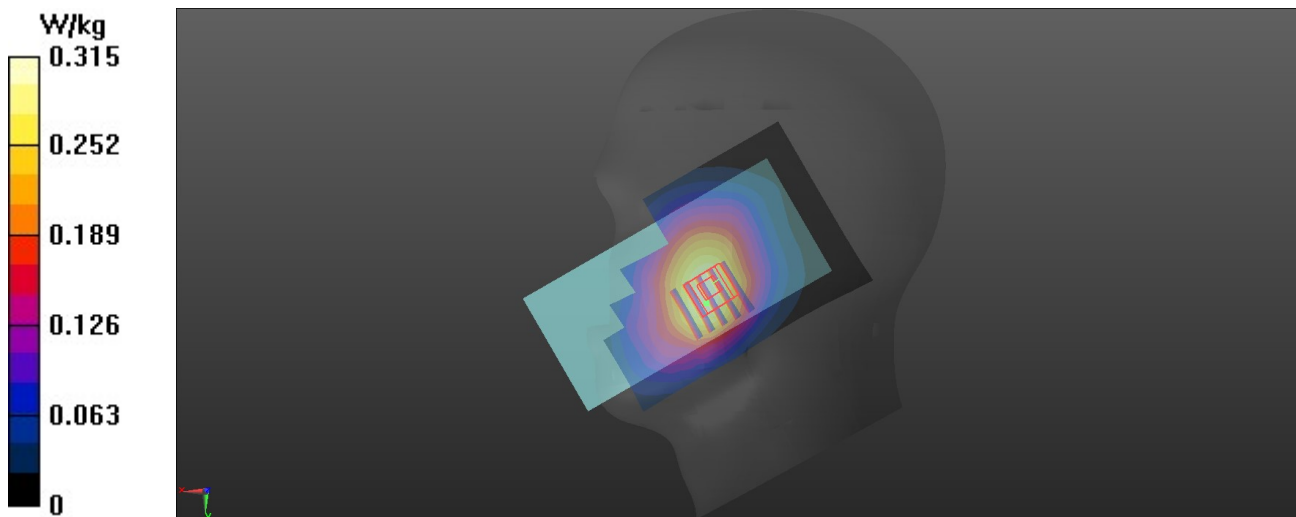

LTE 2_QPSK20M_50_25_Left Cheek_18900**DUT: EUT**

Communication System: UID 0, LTE Band 2; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: H1900 Medium parameters used : $f = 1880$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35) @ 1880 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0600 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.400 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.030 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 62.9%

Maximum value of SAR (measured) = 0.0570 W/kg

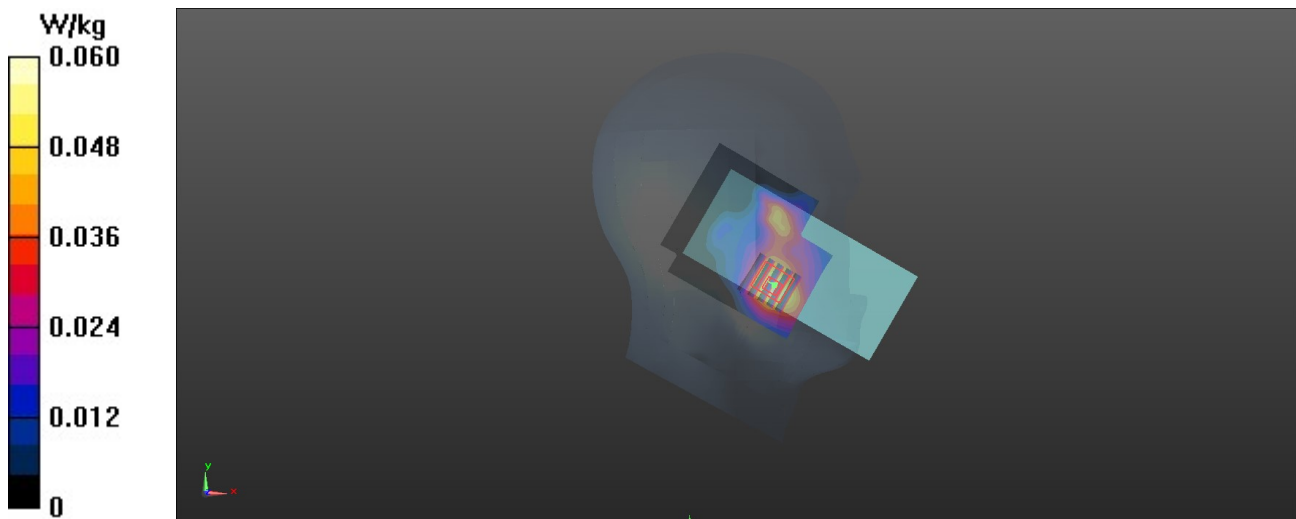

P07 LTE 5_QPSK10M_Right Cheek_Ch20600_1RB_OS25**DUT: EUT**

Communication System: UID 0, LTE; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 40.921$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(9.5, 9.5, 9.5) @ 844 MHz; Calibrated: 2023/6/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.377 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.899 V/m ; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.314 W/kg ; SAR(10 g) = 0.241 W/kg

Smallest distance from peaks to all points 3 dB below = 23.7 mm

Ratio of SAR at M2 to SAR at M1 = 77.3%

Maximum value of SAR (measured) = 0.370 W/kg

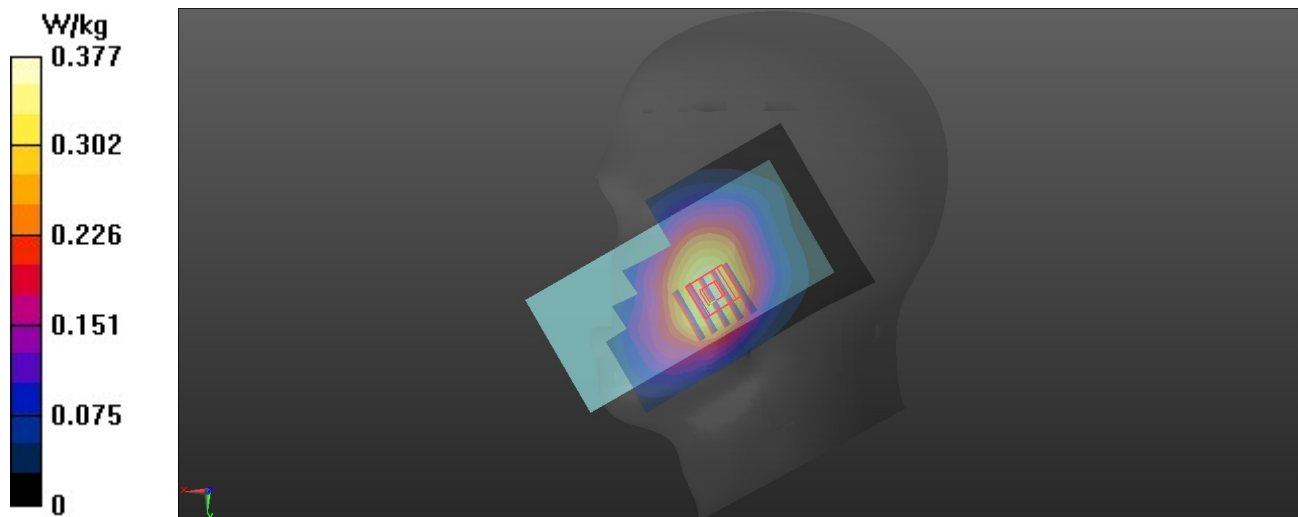

LTE 7_QPSK20M_50_25_Left Cheek_21350**DUT: EUT**

Communication System: UID 0, LTE Band 7&20M; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 2.021$ S/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.66, 7.66, 7.66) @ 2560 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.212 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.026 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 0.0698 W/kg

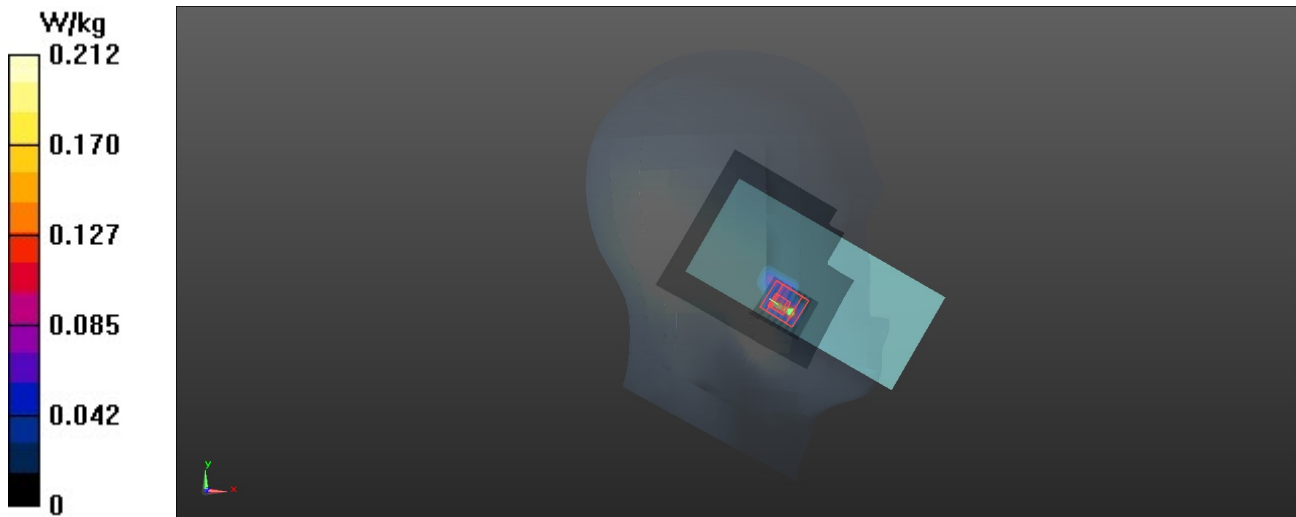

P09 LTE 12_QPSK10M_Right Cheek_Ch23130_1RB_OS25**DUT: EUT**

Communication System: UID 0, LTE; Frequency: 711 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.878 \text{ S/m}$; $\epsilon_r = 43.49$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(10.04, 10.04, 10.04) @ 711 MHz; Calibrated: 2023/6/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.180 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.922 V/m ; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.148 W/kg ; SAR(10 g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 76.3%

Maximum value of SAR (measured) = 0.176 W/kg

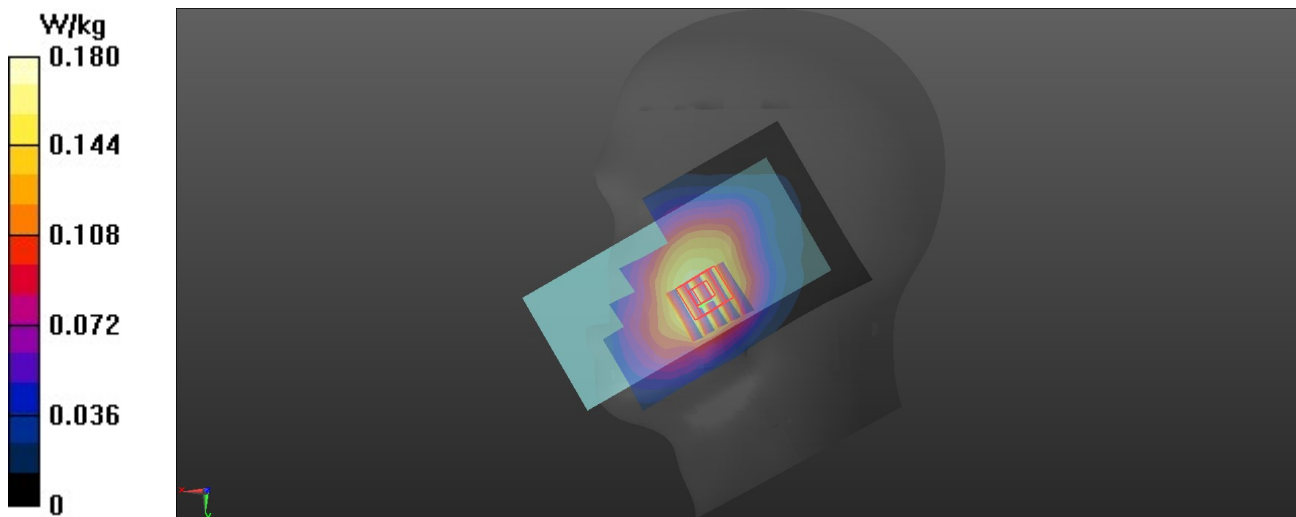

P10 LTE 13_QPSK10M_Right Cheek_Ch23230_1RB_OS0**DUT: EUT**

Communication System: UID 0, LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.902 \text{ S/m}$; $\epsilon_r = 43.311$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(10.04, 10.04, 10.04) @ 782 MHz; Calibrated: 2023/6/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.283 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.760 V/m ; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.311 W/kg

SAR(1 g) = 0.240 W/kg ; SAR(10 g) = 0.185 W/kg

Smallest distance from peaks to all points 3 dB below = 24.1 mm

Ratio of SAR at M2 to SAR at M1 = 77.4%

Maximum value of SAR (measured) = 0.282 W/kg

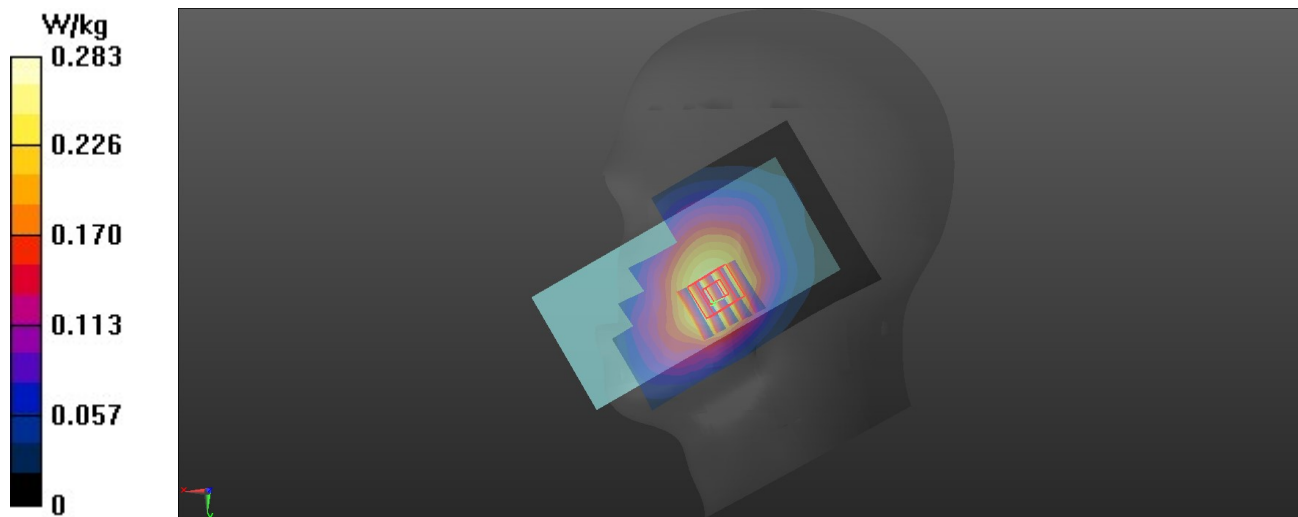

LTE 66_QPSK20M_1_0_Left Cheek_132322**DUT: EUT**

Communication System: UID 0, LTE Band 66&QPSK20M; Frequency: 1745 MHz;Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.365$ S/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.66, 8.66, 8.66) @ 1745 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0900 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.116 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.050 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 64.5%

Maximum value of SAR (measured) = 0.0918 W/kg

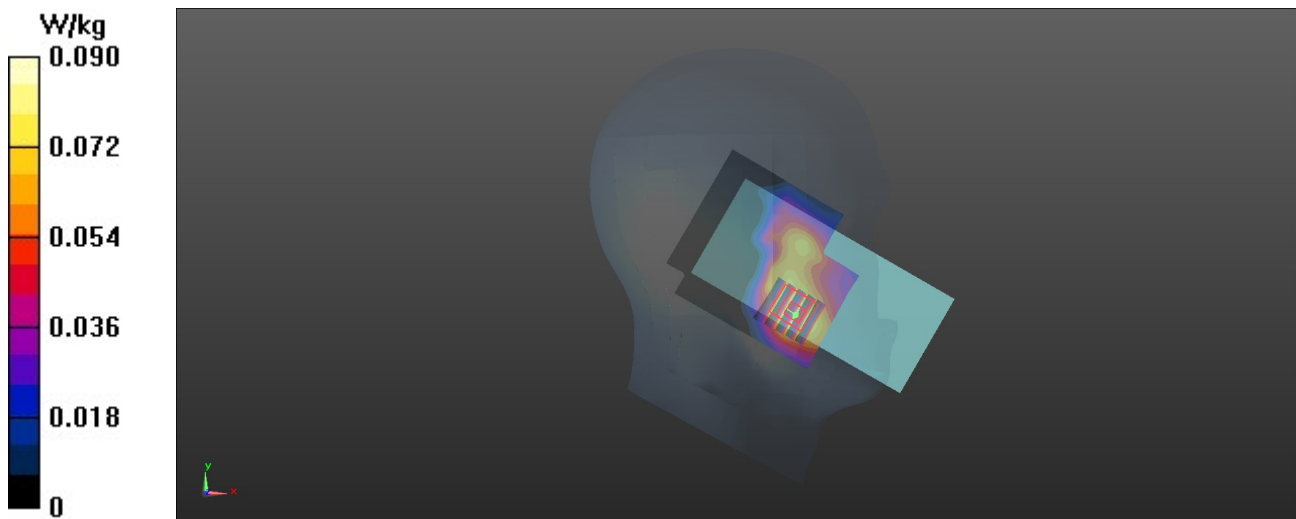

P12 LTE 71_QPSK20M_Right Cheek_Ch133222_1RB_OS99**DUT: EUT**

Communication System: UID 0, LTE; Frequency: 673 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 673$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 40.967$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(10.04, 10.04, 10.04) @ 673 MHz; Calibrated: 2023/6/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.192 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.968 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.124 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.4%

Maximum value of SAR (measured) = 0.178 W/kg

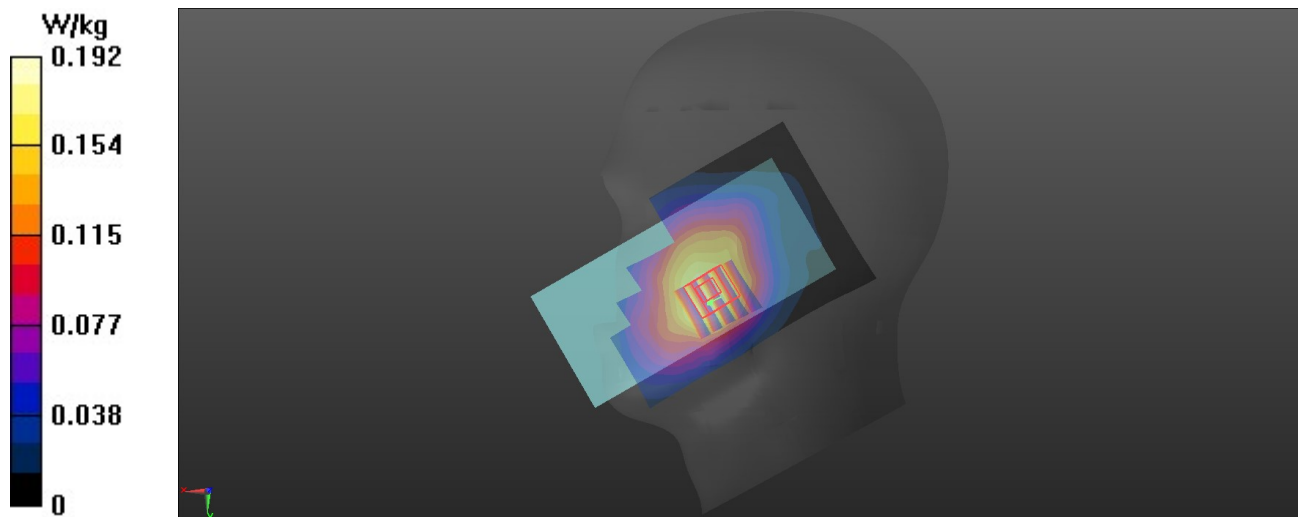

EDR_DH5_Left Cheek_0**DUT: EUT**

Communication System: UID 0, Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.85, 7.85, 7.85) @ 2402 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0769 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.223 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.024 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 0.0681 W/kg

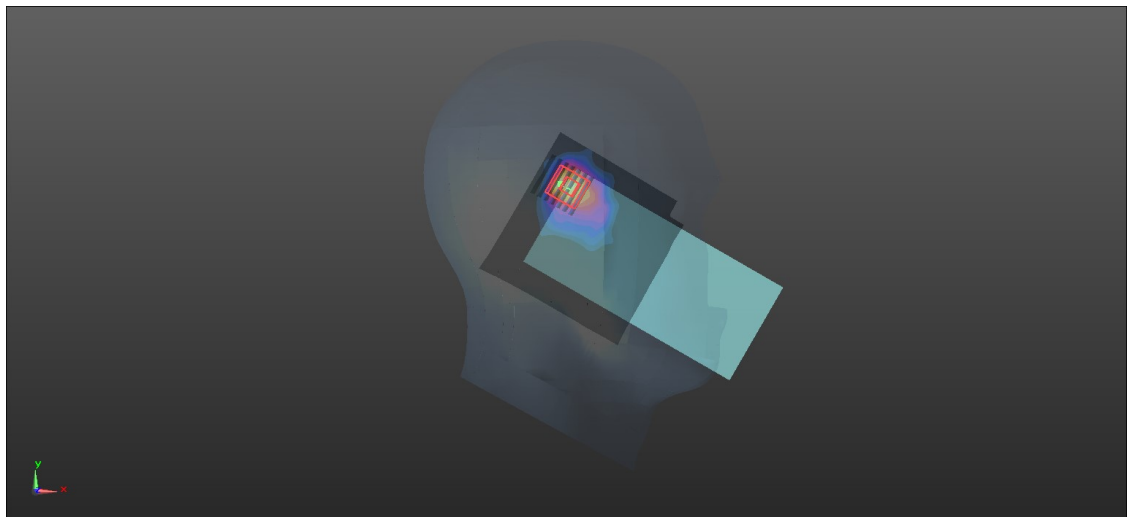

WIFI 2.4G_802.11b_Left Cheek_6**DUT: EUT**

Communication System: UID 0, Wlan 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.861$ S/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.85, 7.85, 7.85) @ 2437 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.672 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.04 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.256 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 47.6%

Maximum value of SAR (measured) = 0.639 W/kg

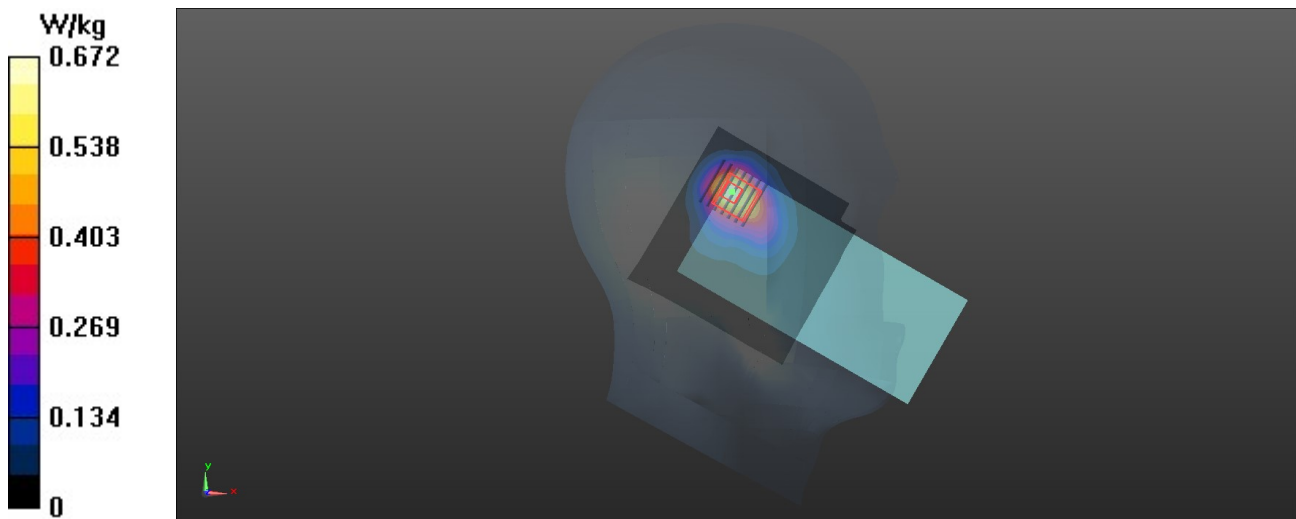

GSM850_GPRS11_Rear Face_10mm_128**DUT: EUT**

Communication System: UID 0, GPRS 850-3solt; Frequency: 824.2 MHz;Duty Cycle: 1:2.67

Medium: H835 Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.19, 10.19, 10.19) @ 824.2 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.713 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.73 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.598 W/kg; SAR(10 g) = 0.333 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 0.742 W/kg

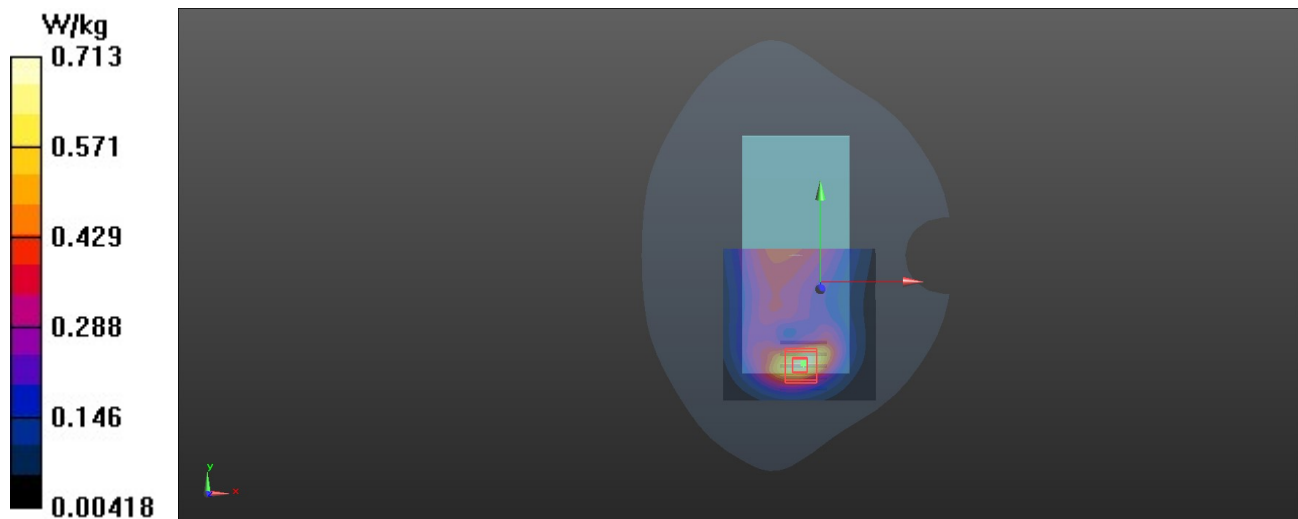

P16 GSM1900_GPRS11_Rear Face_1cm_Ch661**DUT: EUT**

Communication System: UID 0, GPRS11; Frequency: 1880 MHz; Duty Cycle: 1:2.67

Medium: H1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.438$ S/m; $\epsilon_r = 39.933$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.8, 7.8, 7.8) @ 1880 MHz; Calibrated: 2023/6/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.205 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.716 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 0.195 W/kg

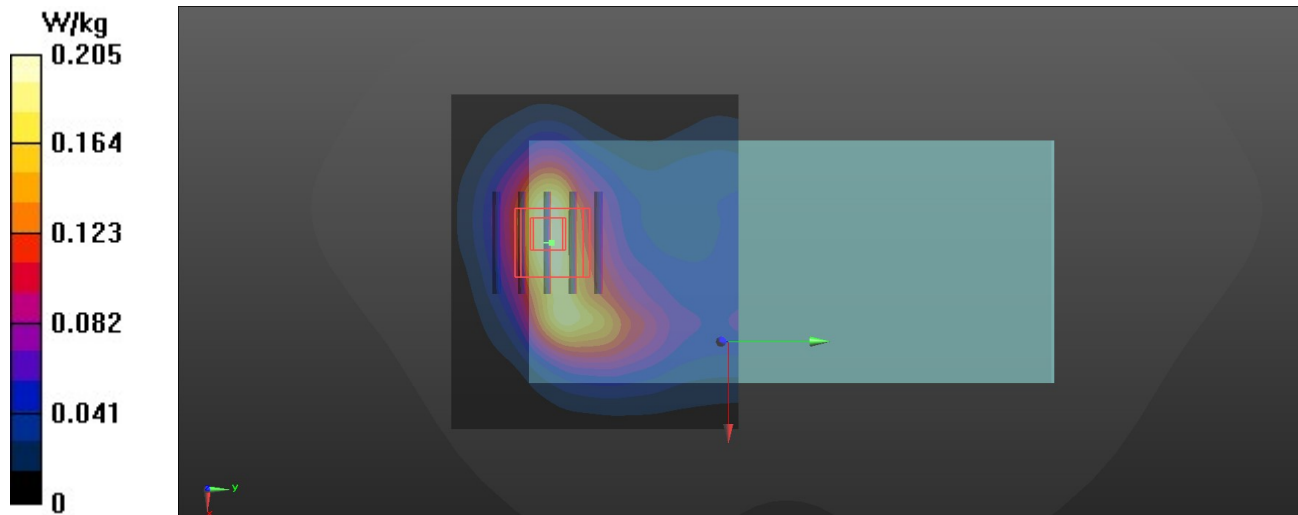

WCDMA II_RMV12.2K_Rear Face_10mm_9400**DUT: EUT**

Communication System: UID 0, WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used : $f = 1880$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35) @ 1880 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.247 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.094 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.111 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 0.248 W/kg

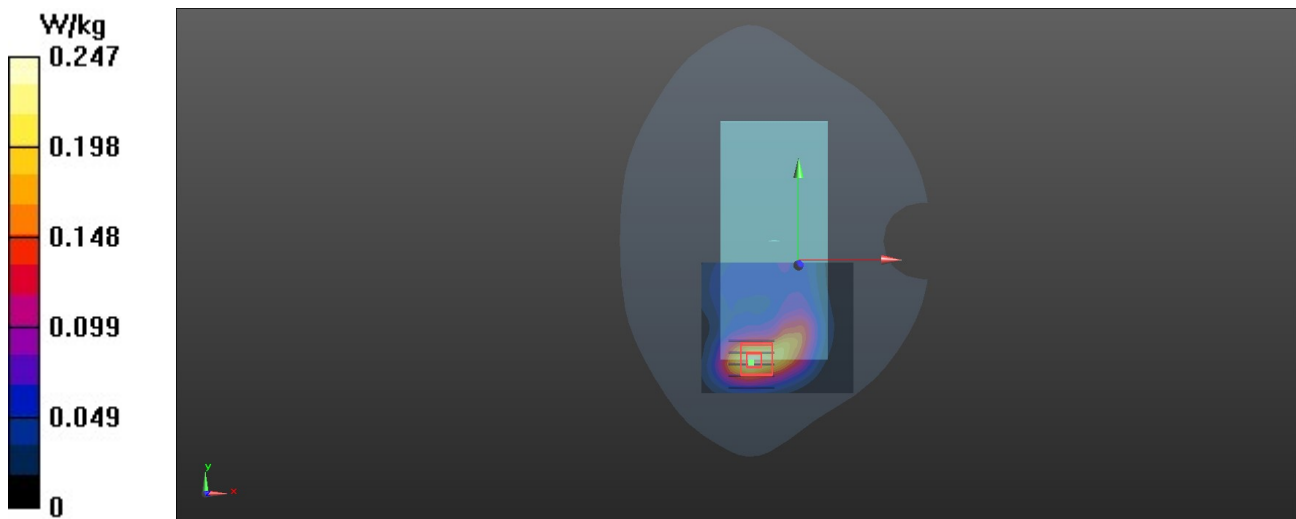

WCDMA IV_RMV12.2K_Rear Face_10mm_1413**DUT: EUT**

Communication System: UID 0, WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.66, 8.66, 8.66) @ 1732.6 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.395 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.930 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.191 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 0.413 W/kg

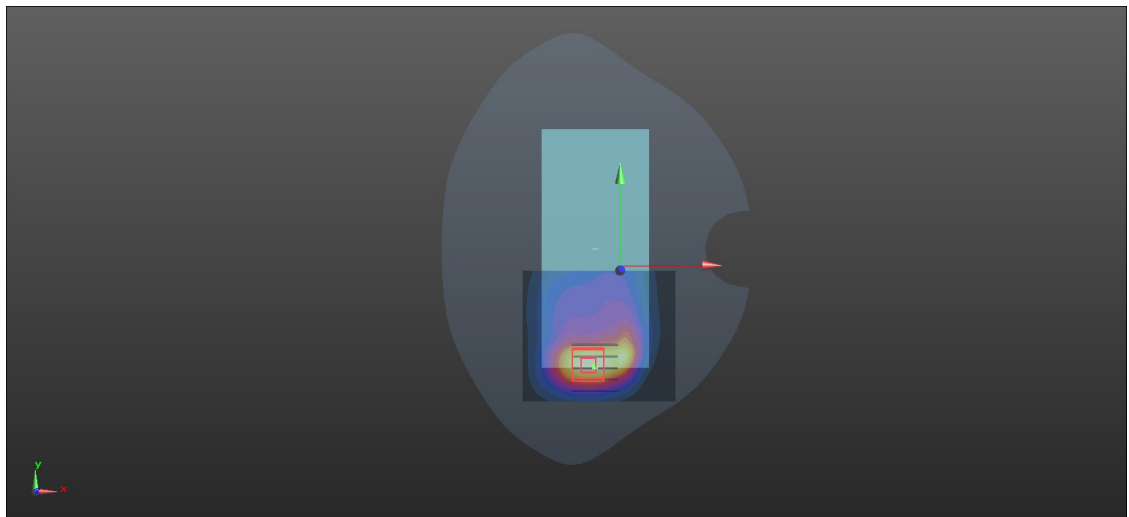

P19 WCDMA V_RMC12.2K_Rear Face_1cm_Ch4233**DUT: EUT**

Communication System: UID 0, WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 847$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 40.904$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(9.5, 9.5, 9.5) @ 846.6 MHz; Calibrated: 2023/6/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.679 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.08 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.285 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.3%

Maximum value of SAR (measured) = 0.758 W/kg

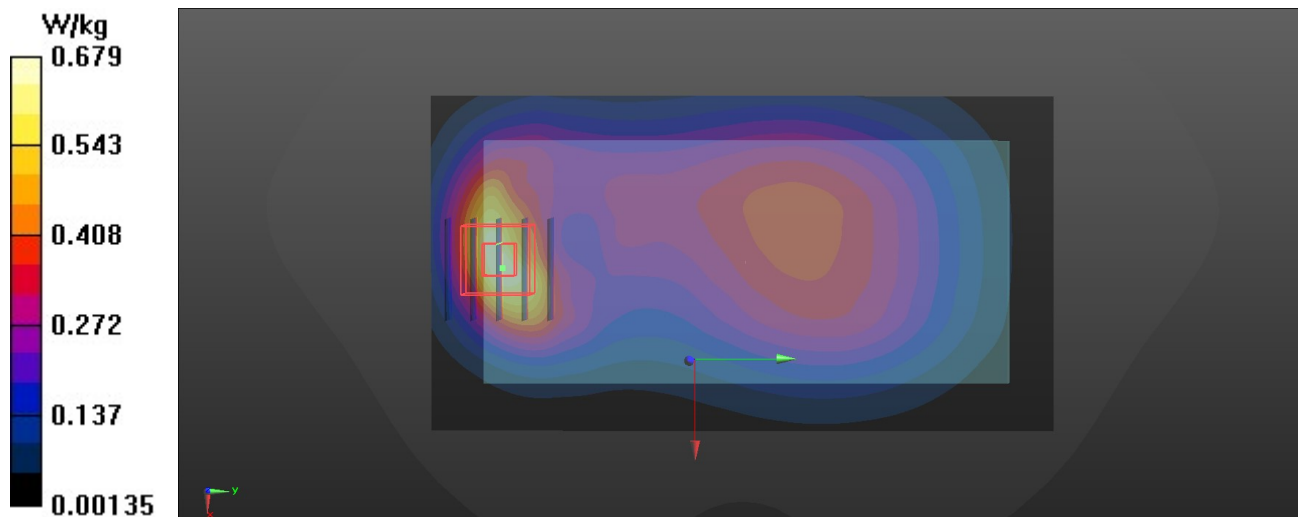

LTE 2_QPSK20M_1_99_Rear Face_10mm_19100**DUT: EUT**

Communication System: UID 0, LTE Band 2; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35) @ 1900 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.324 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.770 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.141 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 0.329 W/kg

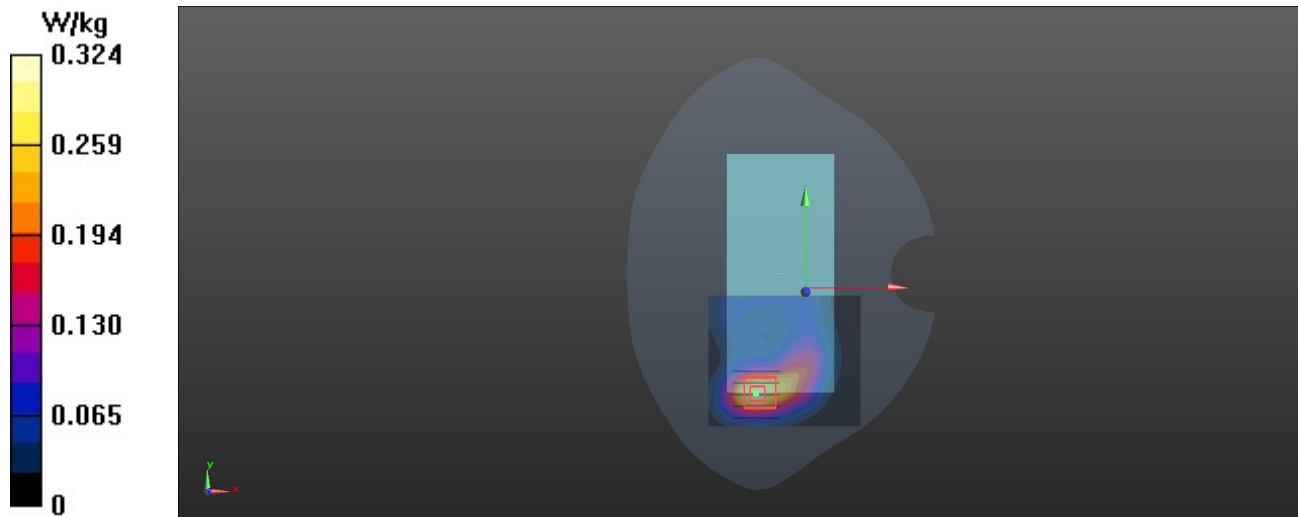

P21 LTE 5_QPSK10M_Rear Face_1cm_Ch20600_1RB_OS25**DUT: EUT**

Communication System: UID 0, LTE; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 40.921$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(9.5, 9.5, 9.5) @ 844 MHz; Calibrated: 2023/6/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.806 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.06 V/m ; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.575 W/kg ; SAR(10 g) = 0.325 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 0.860 W/kg

