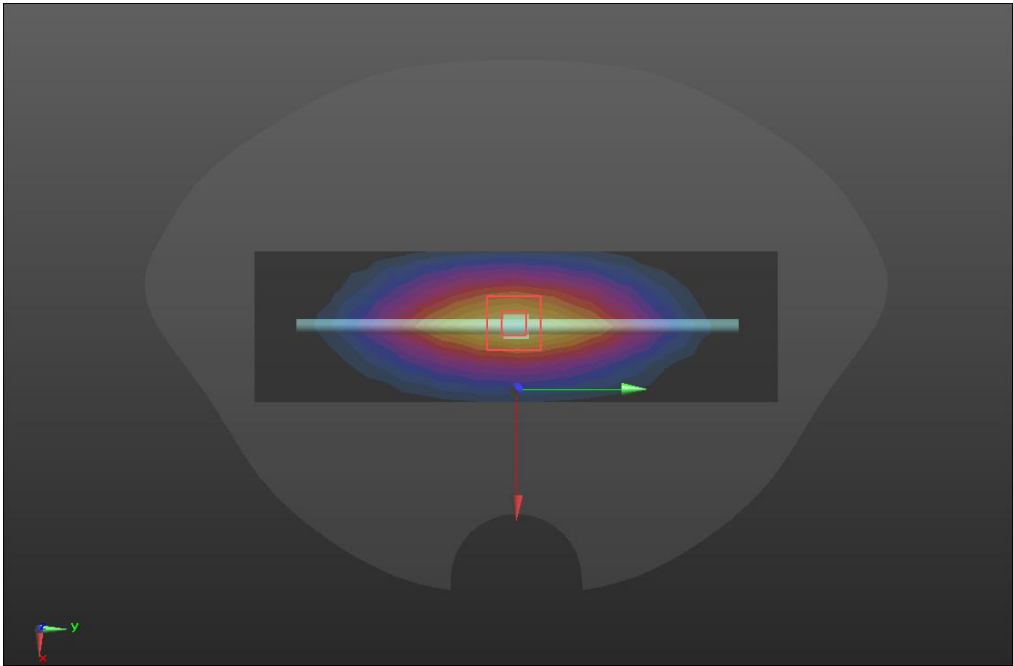
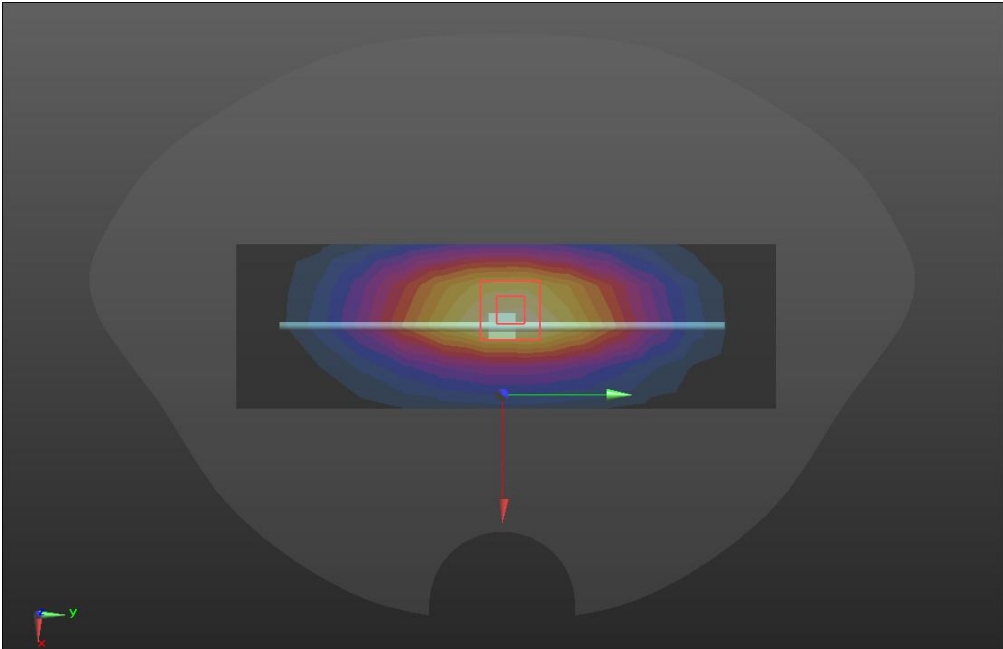
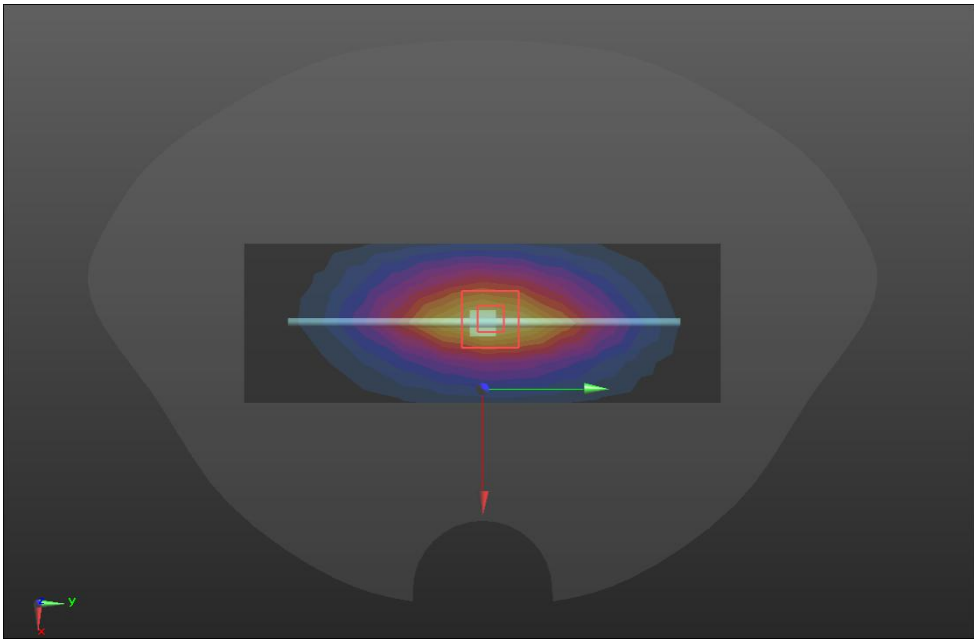


System check	750MHz
Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 43.07$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.72, 9.72, 9.72) @ 750 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) 750/Dipole 750MHz/Area Scan (5x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.83 W/kg 750/Dipole 750MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 58.50 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 3.24 W/kg SAR(1 g) = 2.10 W/kg; SAR(10 g) = 1.43 W/kg Maximum value of SAR (measured) = 2.85 W/kg 	

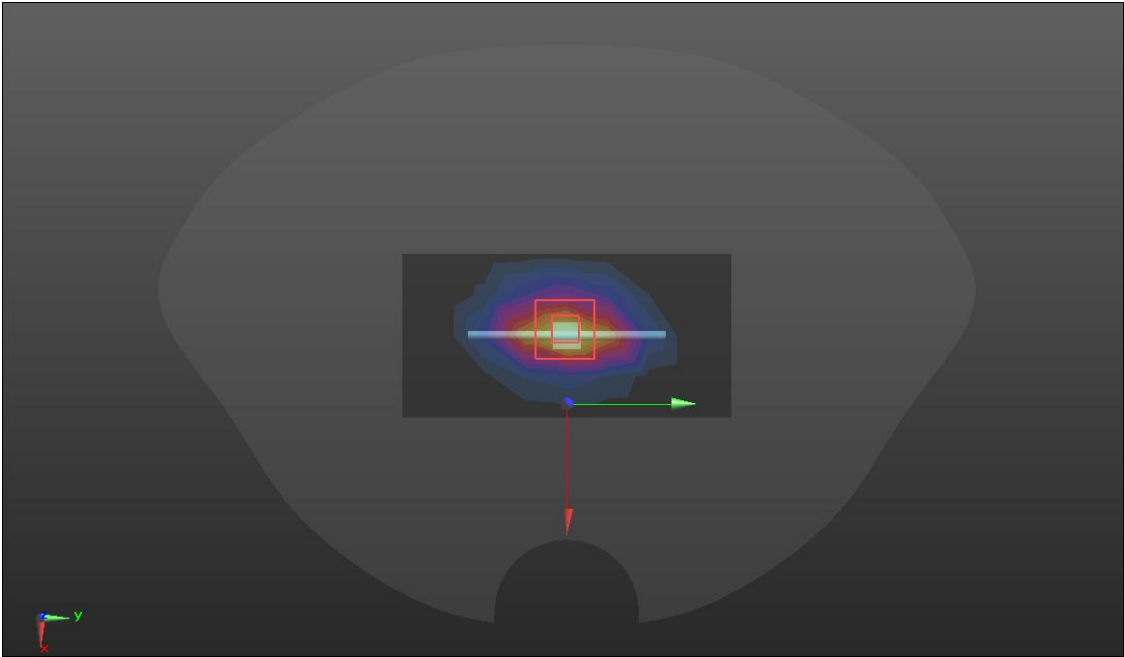
SRTC performed system check by using 250mw at antenna port

System check	835MHz
Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 42.99$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.41, 9.41, 9.41) @ 835 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D835/Dipole 835MHz/Area Scan (5x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.71 W/kg D835/Dipole 835MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 56.70 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 3.50 W/kg SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.56 W/kg Maximum value of SAR (measured) = 3.04 W/kg 	

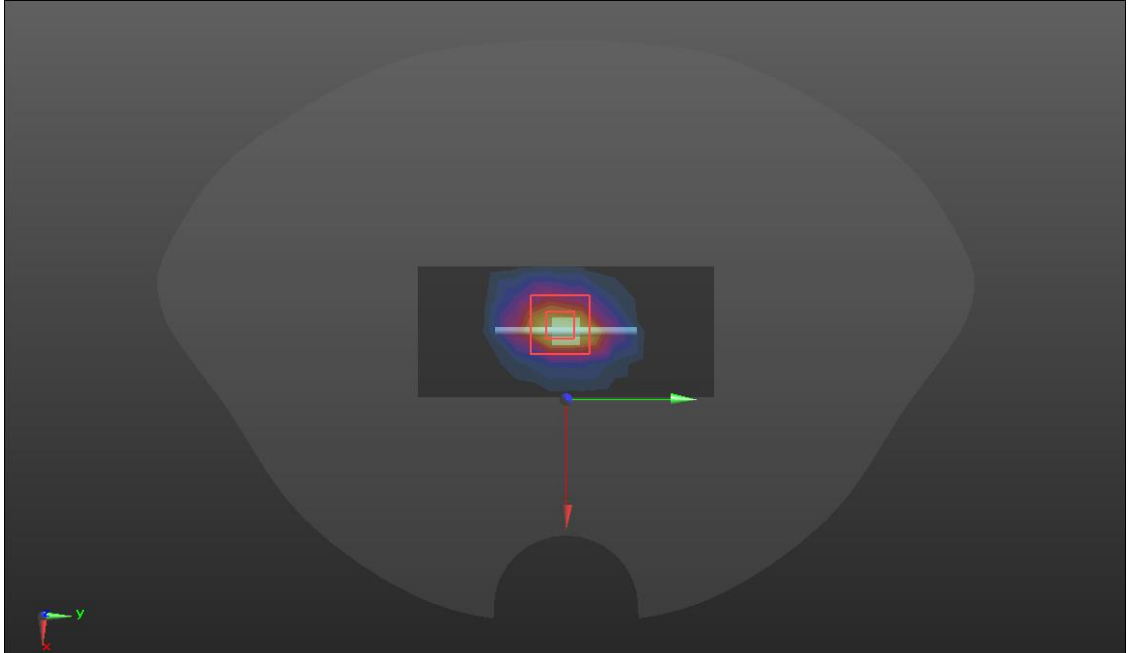
SRTC performed system check by using 250mw at antenna port

System check	900MHz
Communication System: UID 0, CW (0); Frequency: 900 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.01 \text{ S/m}$; $\epsilon_r = 40.05$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.41, 9.41, 9.41) @ 900 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D900/Dipole 900MHz/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 3.85 W/kg D900/Dipole 900MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 66.17 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 4.74 W/kg SAR(1 g) = 2.73 W/kg; SAR(10 g) = 1.75 W/kg Maximum value of SAR (measured) = 3.99 W/kg 	

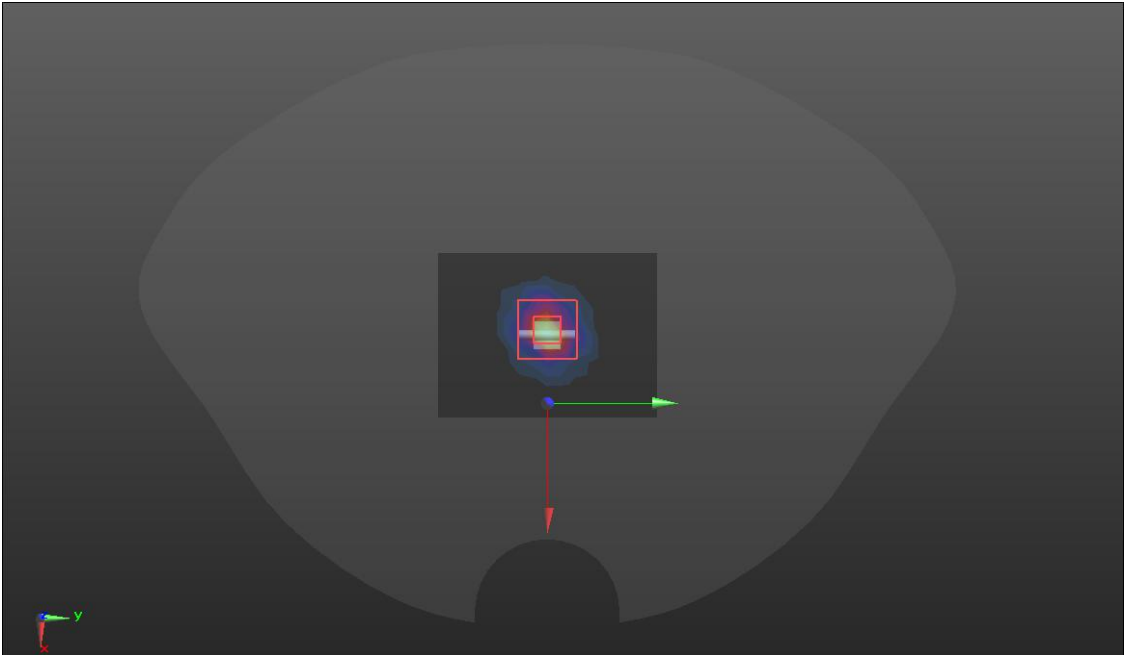
SRTC performed system check by using 250mw at antenna port

System check	1800MHz
Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.40 \text{ S/m}$; $\epsilon_r = 39.31$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17) @ 1800 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D1800/Dipole 1800MHz/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 15.3 W/kg D1800/Dipole 1800MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 107.8 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 18.7 W/kg SAR(1 g) = 9.73 W/kg; SAR(10 g) = 5.08 W/kg Maximum value of SAR (measured) = 15.6 W/kg 	

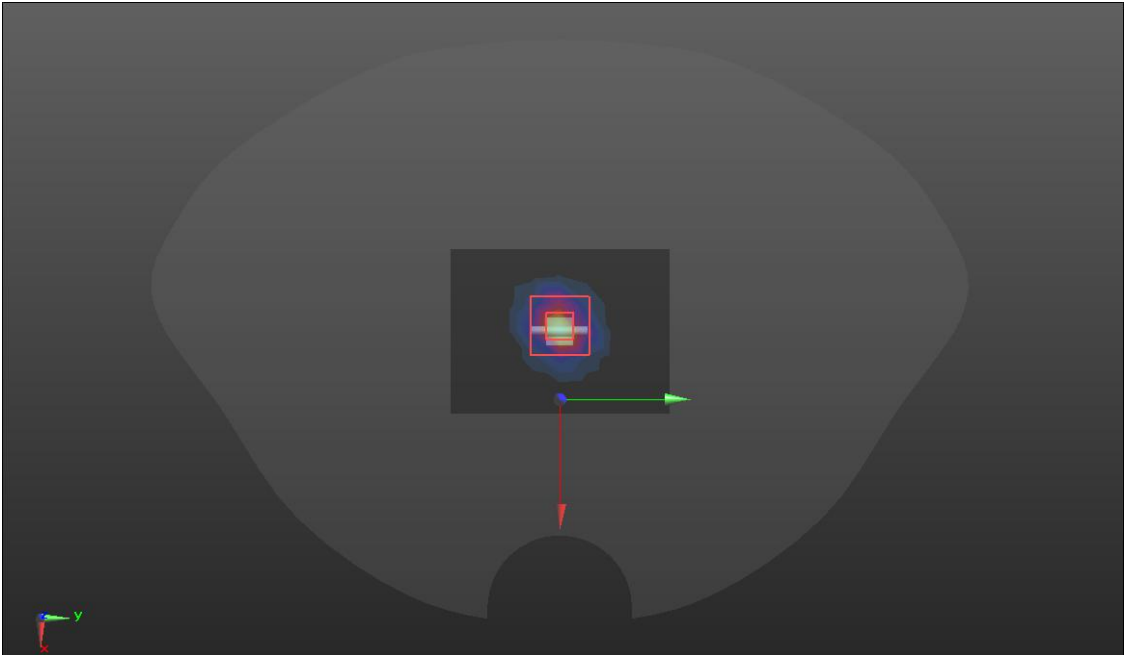
SRTC performed system check by using 250mw at antenna port

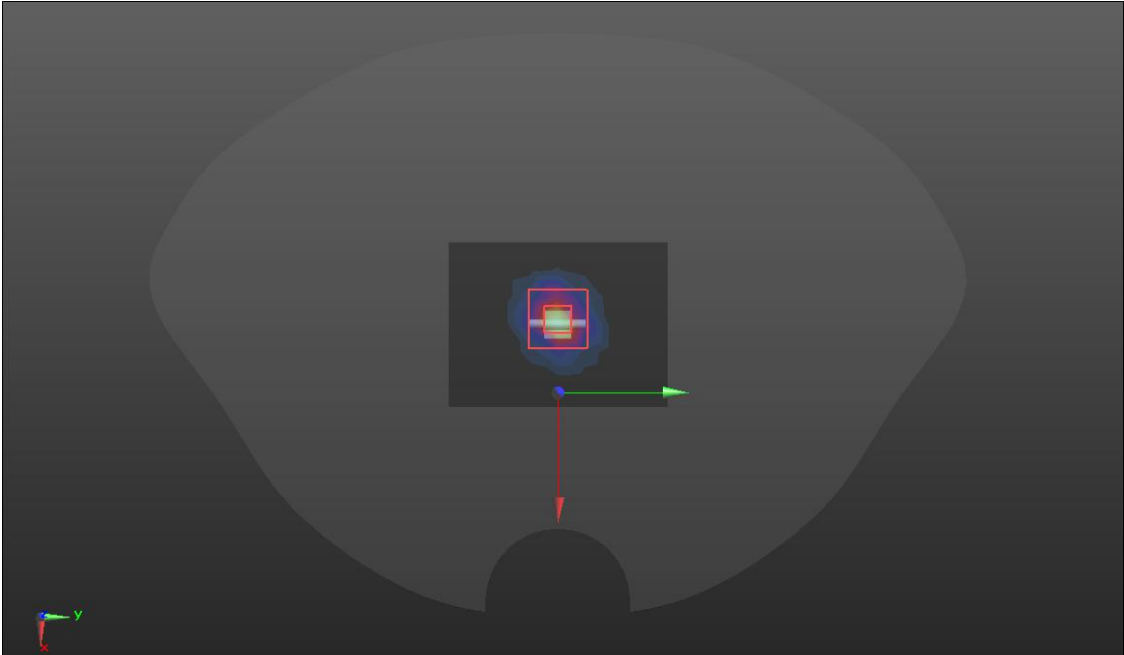
System check	2450MHz
Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.74 \text{ S/m}$; $\epsilon_r = 40.83$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.45, 7.45, 7.45) @ 2450 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D2450/Dipole 2450MHz/Area Scan (5x10x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 18.1 W/kg D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 107.6 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 25.1 W/kg SAR(1 g) = 13.25 W/kg; SAR(10 g) = 6.13 W/kg Maximum value of SAR (measured) = 20.3 W/kg 	

SRTC performed system check by using 250mw at antenna port

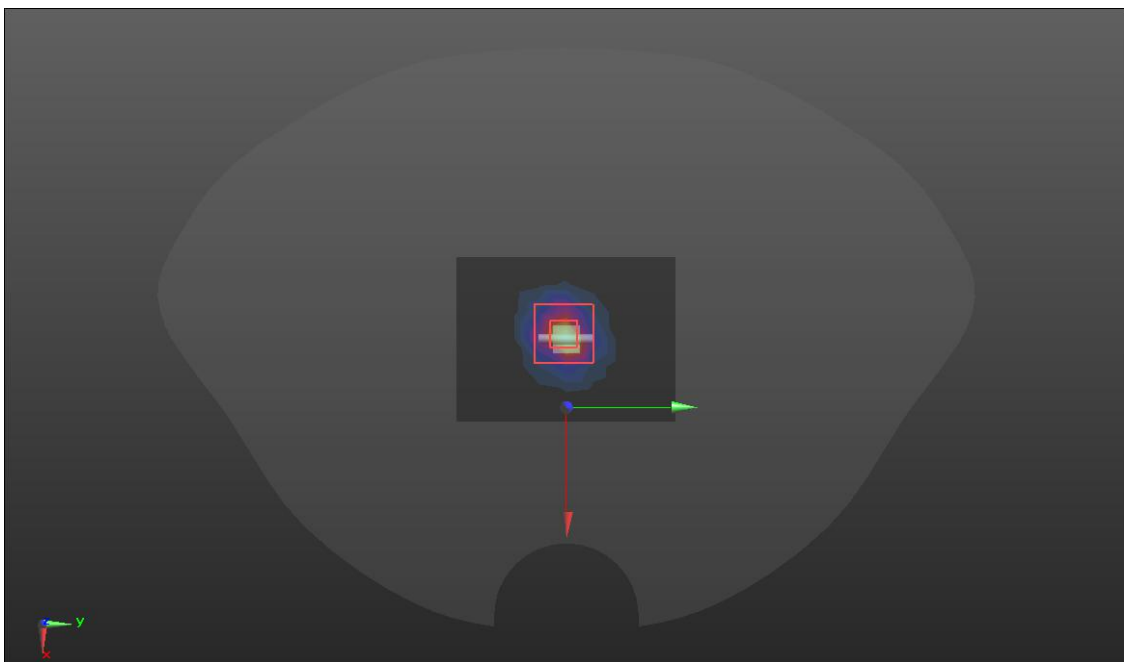
System check	5200MHz
Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.67 \text{ S/m}$; $\epsilon_r = 36.68$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.58, 5.58, 5.58) @ 5200 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D5GV2 /D5200 SYSTEM CHECK 2 2/Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 18.2 W/kg D5GV2 /D5200 SYSTEM CHECK 2 2/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 68.10 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 30.7 W/kg SAR(1 g) = 7.59 W/kg; SAR(10 g) = 2.14 W/kg Maximum value of SAR (measured) = 18.9 W/kg 	

SRTC performed system check by using 100mw at antenna port

System check	5300MHz
Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.85 \text{ S/m}$; $\epsilon_r = 35.55$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.52, 5.52, 5.52) @ 5300 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D5GV2 /D5300 SYSTEM CHECK/Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 17.8 W/kg D5GV2 /D5300 SYSTEM CHECK/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 66.76 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 30.5 W/kg SAR(1 g) = 7.80 W/kg; SAR(10 g) = 2.20 W/kg Maximum value of SAR (measured) = 18.4 W/kg 	

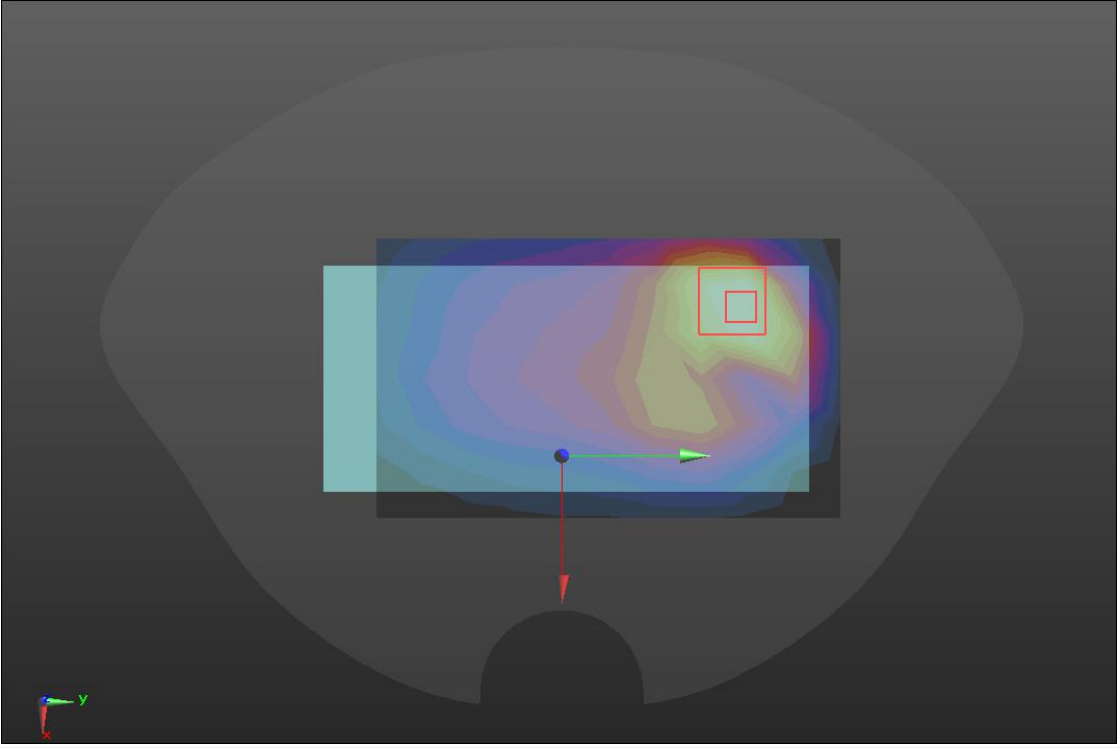
System check	5600MHz
Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.21 \text{ S/m}$; $\epsilon_r = 36.77$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.95, 4.95, 4.95) @ 5600 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D5GV2 /D5500 SYSTEM CHECK/Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 18.9 W/kg D5GV2 /D5500 SYSTEM CHECK/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 67.70 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 34.0 W/kg SAR(1 g) = 8.00 W/kg; SAR(10 g) = 2.26 W/kg Maximum value of SAR (measured) = 19.7 W/kg 	

SRTC performed system check by using 100mw at antenna port

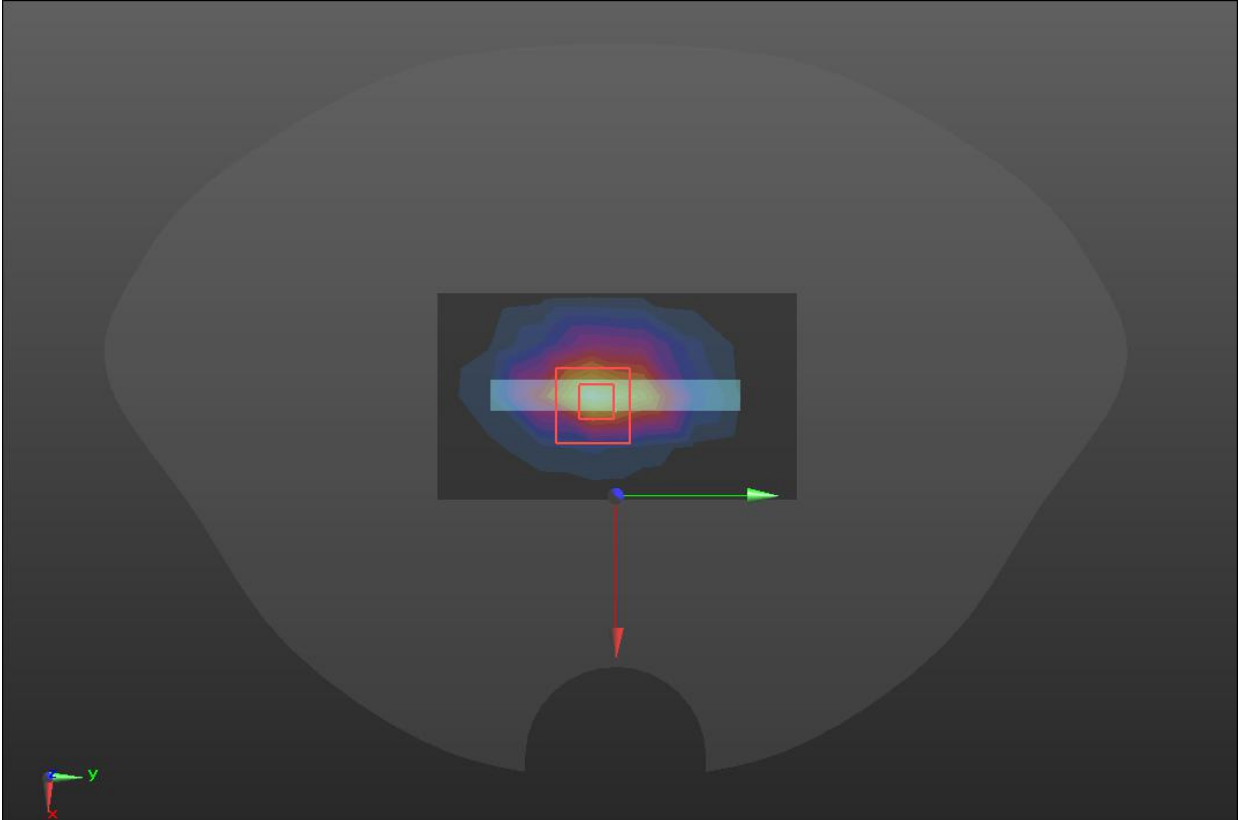
System check	5800MHz
Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.40 \text{ S/m}$; $\epsilon_r = 36.37$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.05, 5.05, 5.05) @ 5800 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D5GV2 /D5800 SYSTEM CHECK 2/Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 18.1 W/kg D5GV2 /D5800 SYSTEM CHECK 2/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 64.34 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 34.5 W/kg SAR(1 g) = 7.85 W/kg; SAR(10 g) = 2.19 W/kg Maximum value of SAR (measured) = 18.9 W/kg 	

SRTC performed system check by using 100mw at antenna port

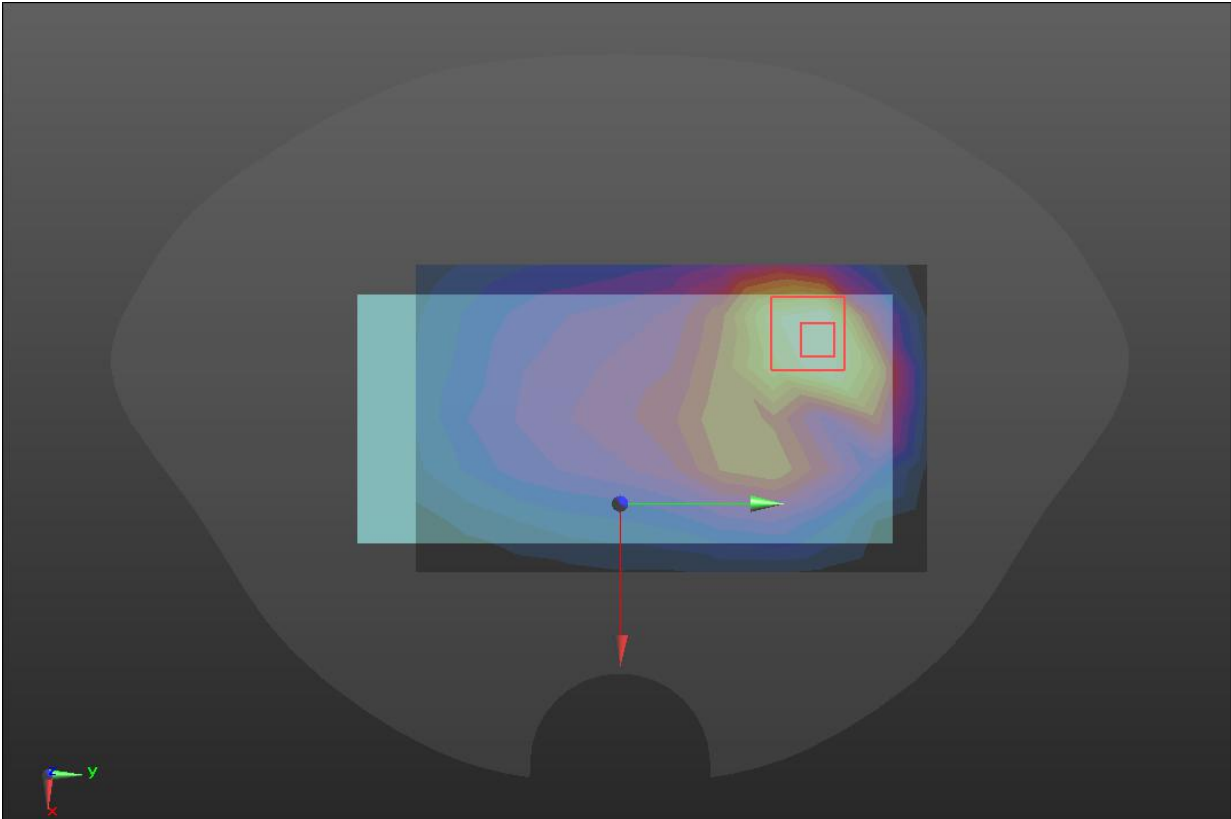
GSM850

Hotspot	Back
Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 3:8 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 41.528$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.41, 9.41, 9.41) @ 836.6 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) BACK/GSM850/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.472 W/kg BACK/GSM850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 16.72 V/m; Power Drift = -0.16 dB Peak SAR (extrapolated) = 0.656 W/kg SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.205 W/kg Maximum value of SAR (measured) = 0.535 W/kg	
	

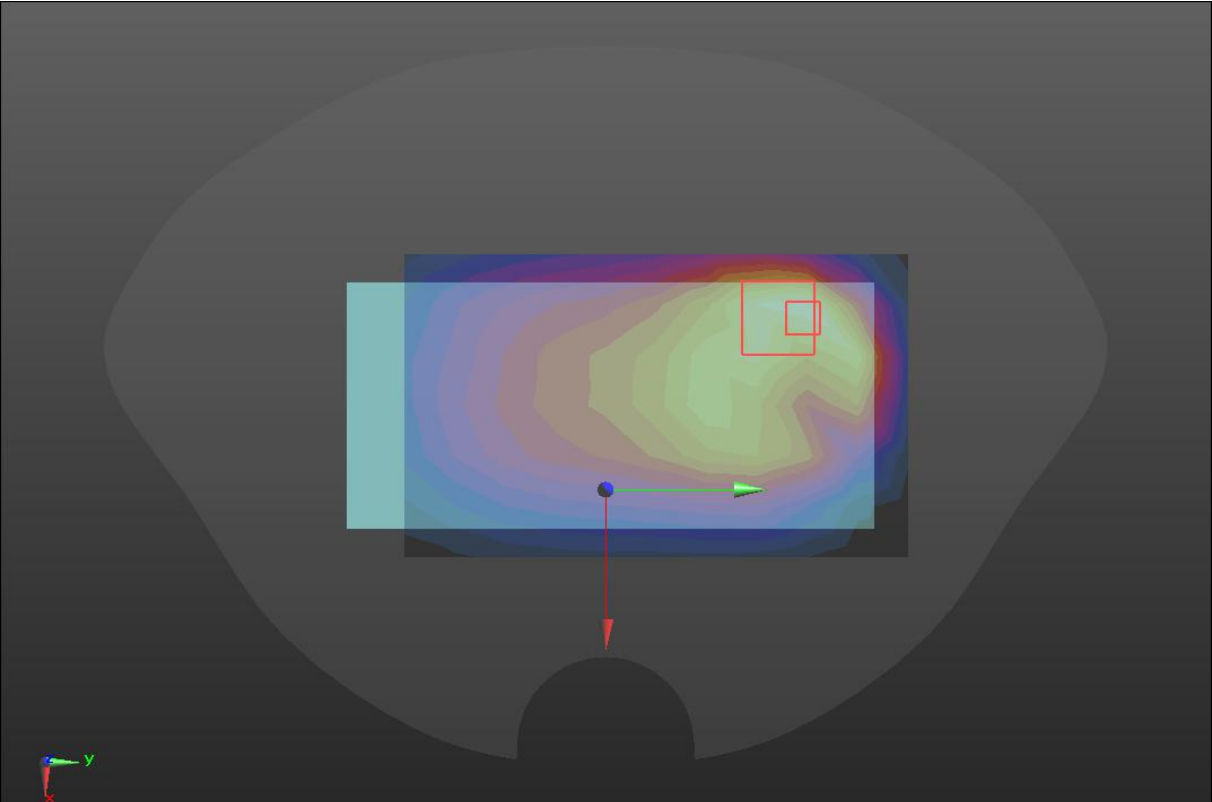
GSM1900

Hotspot	Bottom
Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 4:8 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.02, 8.02, 8.02) @ 1880 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) BOTTOM/GSM1900/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.09 W/kg BOTTOM/GSM1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 24.29 V/m; Power Drift = -0.12 dB Peak SAR (extrapolated) = 2.12 W/kg SAR(1 g) = 0.893 W/kg; SAR(10 g) = 0.312 W/kg Maximum value of SAR (measured) = 1.21 W/kg 	

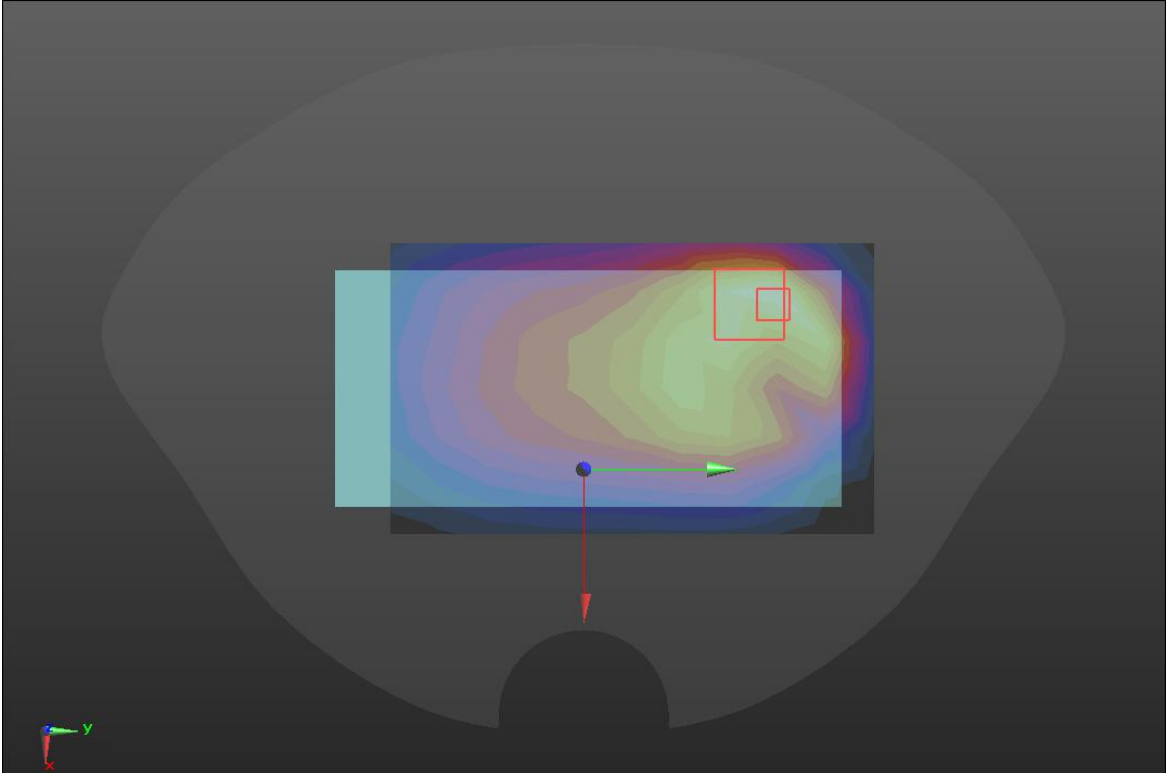
WCDMA B5

Hotspot	Back
Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.41, 9.41, 9.41) @ 836.6 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) BACK/W5/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.154 W/kg BACK/W5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 8.928 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.242 W/kg SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.070 W/kg Maximum value of SAR (measured) = 0.191 W/kg 	

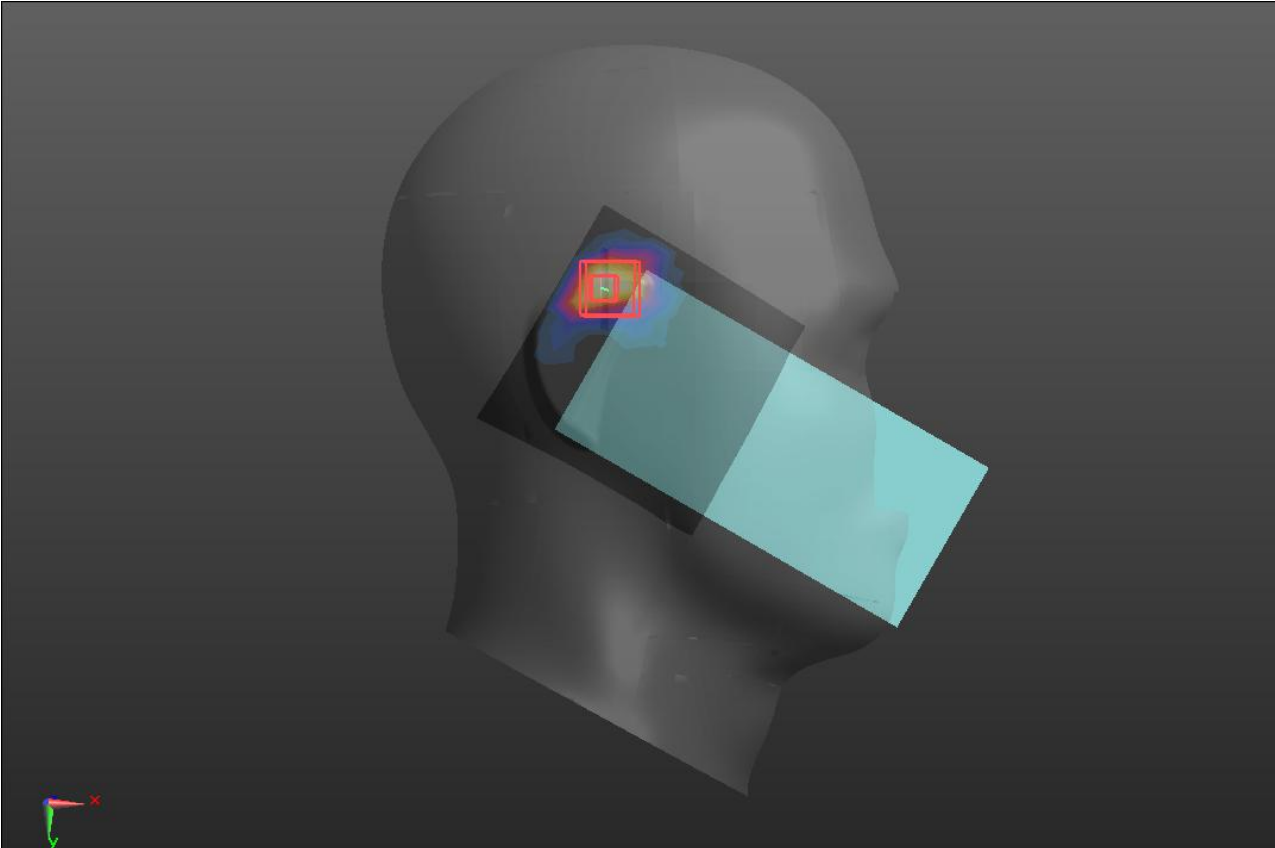
LTE Band5

Hotspot	Front
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.29$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.41, 9.41, 9.41); Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483) FRONT/LTE B5/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.334 W/kg FRONT/LTE B5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 11.57 V/m; Power Drift = -0.16 dB Peak SAR (extrapolated) = 0.450 W/kg SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.132 W/kg Maximum value of SAR (measured) = 0.354 W/kg	
	

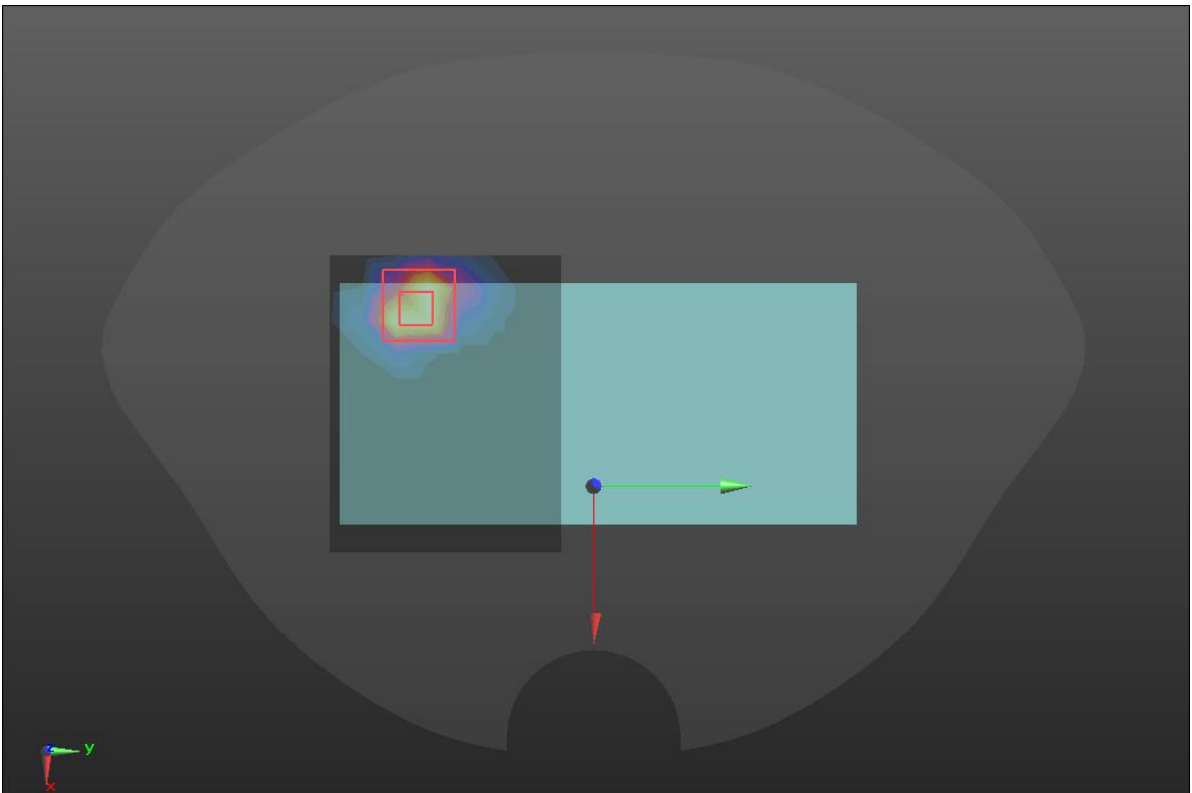
LTE Band12

Hotspot	Back
Communication System: UID 0, LTE BAND12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 707.5 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 42.115$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.72, 9.72, 9.72) @ 707.5 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) BACK/LTE B12/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.133 W/kg BACK/LTE B12/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.353 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.181 W/kg SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.056 W/kg Maximum value of SAR (measured) = 0.145 W/kg 	

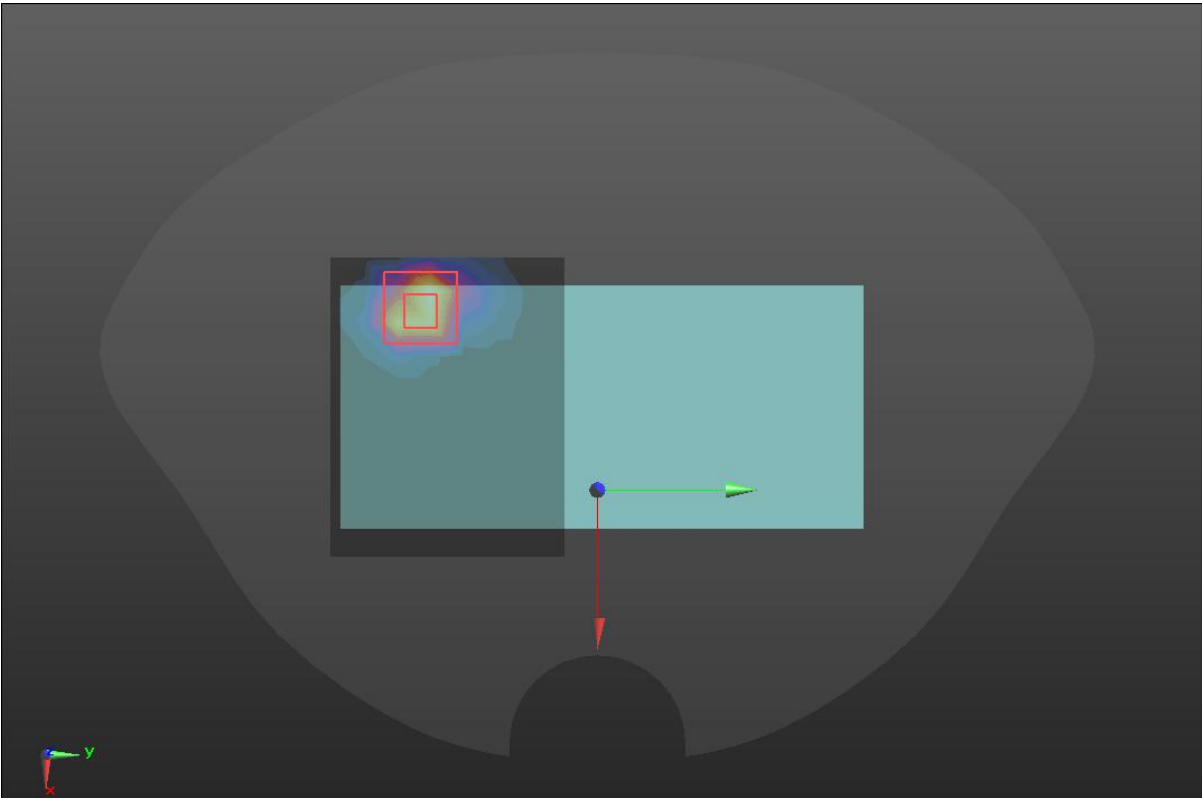
WIFI 2.4GHz

Head	Left cheek
Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz; Duty Cycle: 0.99:1 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 39.219$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.45, 7.45, 7.45); Calibrated: 2021/10/20; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2021/10/8 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) LC/WIFI2.4/Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.218 W/kg LC/WIFI2.4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 1.212 V/m; Power Drift = 0.15 dB Peak SAR (extrapolated) = 0.488 W/kg SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.088 W/kg Maximum value of SAR (measured) = 0.386 W/kg	
	

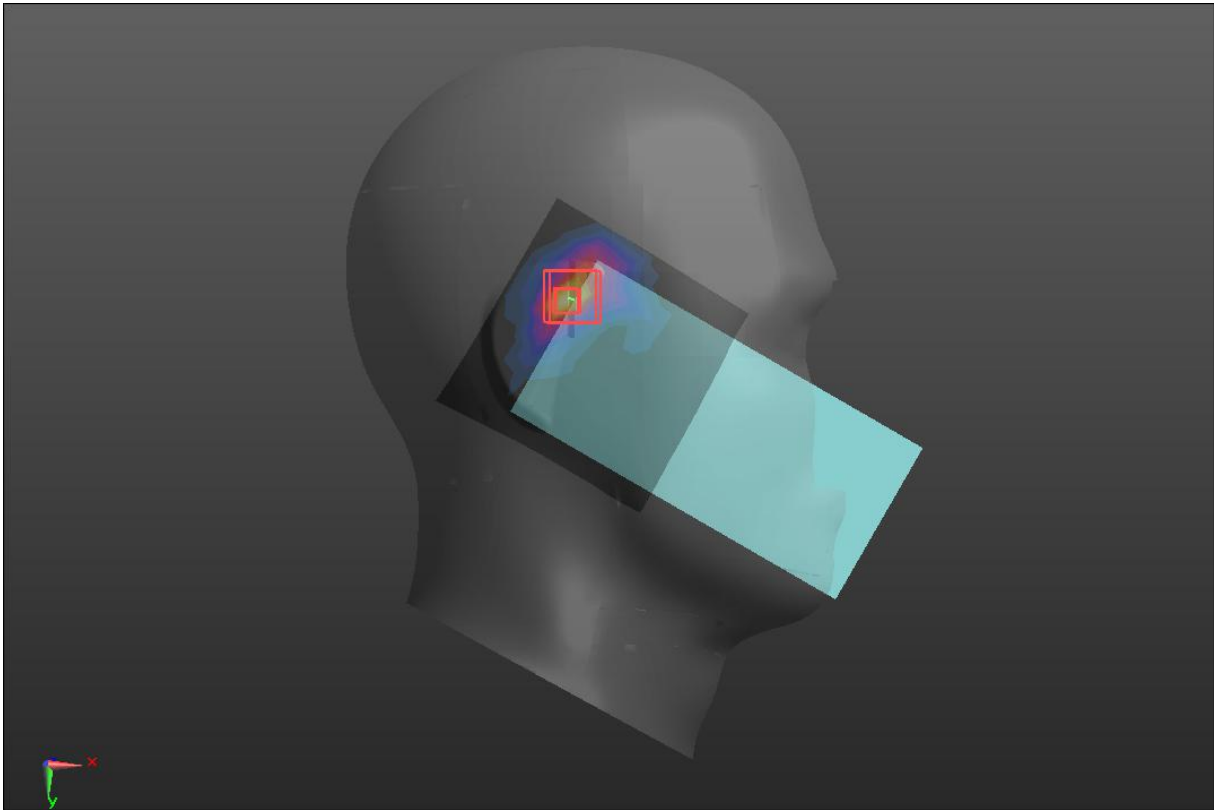
WIFI 5.2GHz

Head	Back
Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5220 MHz; Duty Cycle: 0.98:1 Medium parameters used (interpolated): $f = 5220$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 35.98$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.58, 5.58, 5.58); Calibrated: 2021/10/20; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2021/10/8 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/WIFI5.2/Area Scan (10x8x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 0.272 W/kg BACK/WIFI5.2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 2.33 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.855 W/kg SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.107 W/kg Maximum value of SAR (measured) = 0.462 W/kg	
	

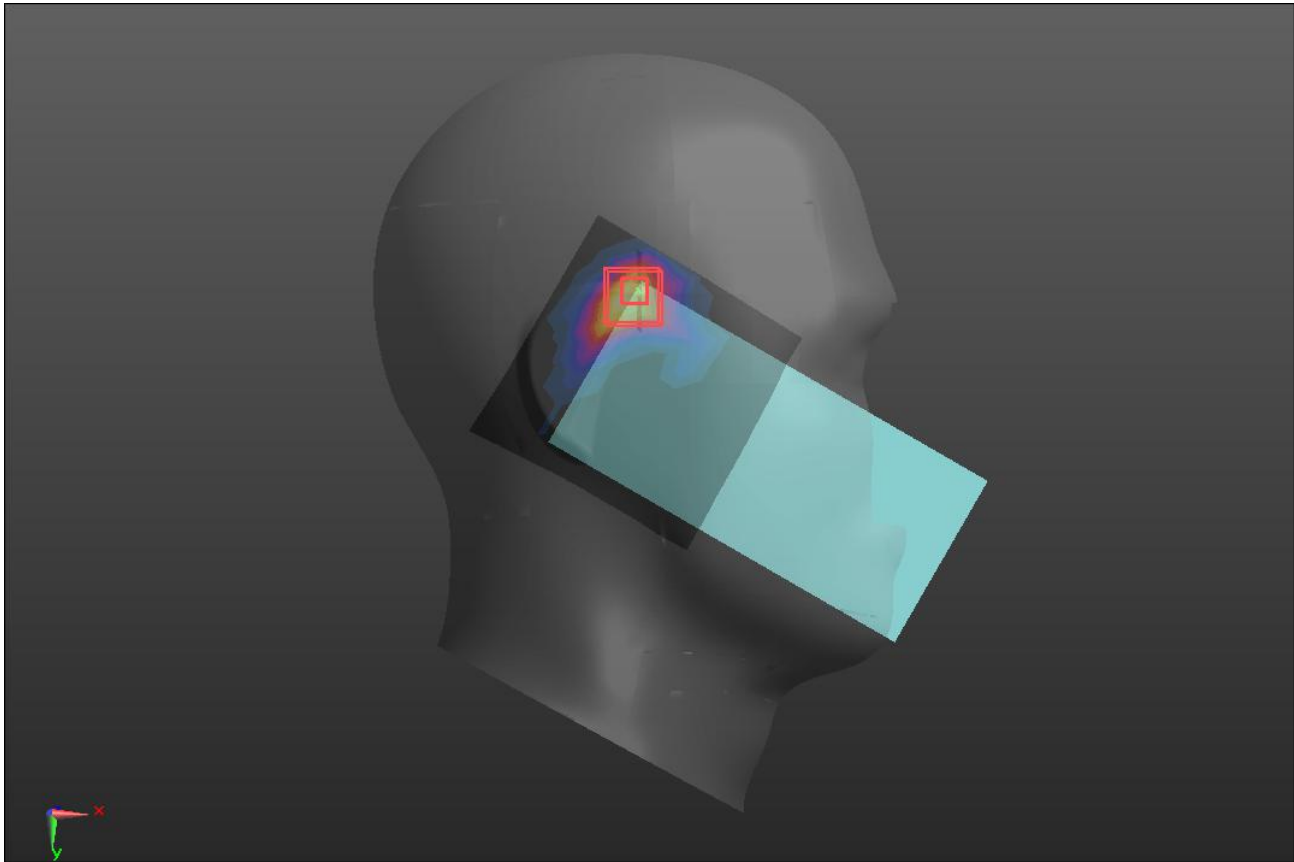
WIFI 5.3GHz

Head	Back
Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5280 MHz; Duty Cycle: 0.98:1 Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.74$ S/m; $\epsilon_r = 35.92$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.52, 5.52, 5.52); Calibrated: 2021/10/20; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2021/10/8 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/WIFI5.3 /Area Scan (10x8x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 0.407 W/kg BACK/WIFI5.3 /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 6.87 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.977 W/kg SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.116 W/kg Maximum value of SAR (measured) = 0.635 W/kg 	

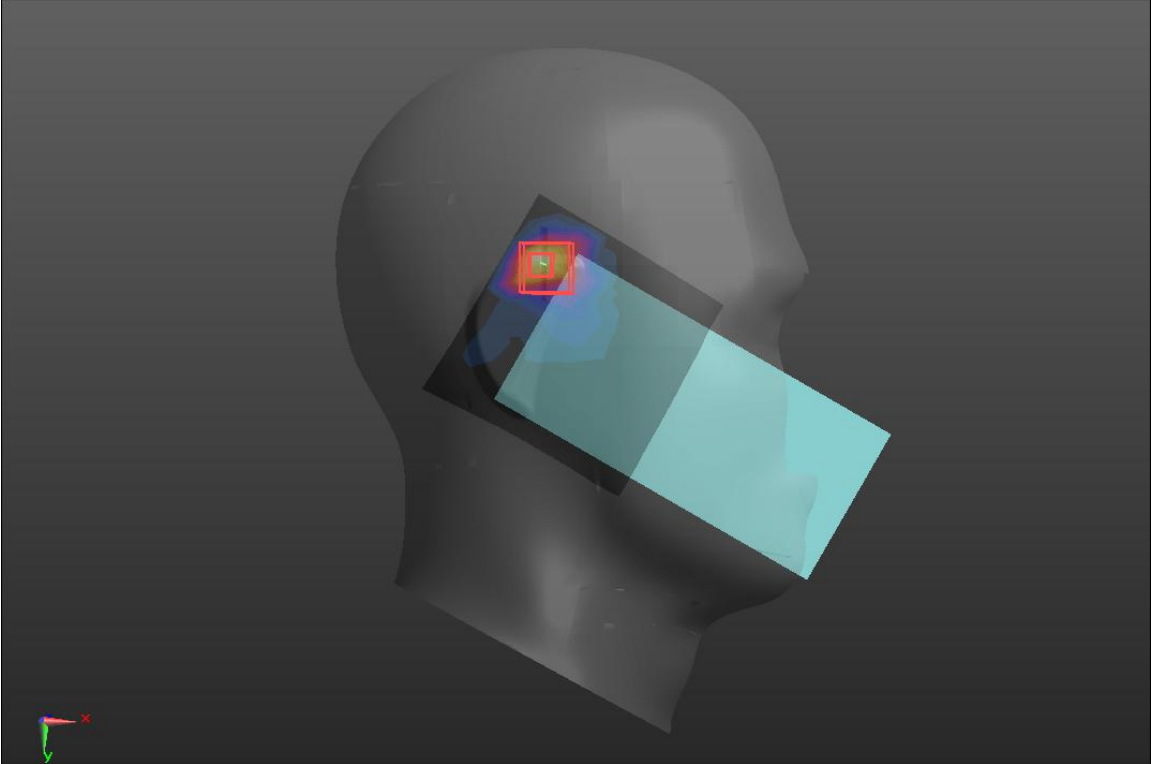
WIFI 5.6GHz

Head	Right cheek
Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5580 MHz; Duty Cycle: 0.98:1 Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.049$ S/m; $\epsilon_r = 35.526$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.95, 4.95, 4.95); Calibrated: 2021/10/20; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2021/10/8 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) RC/WIFI5.6/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 0.778 W/kg RC/WIFI5.6/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 7.332 V/m; Power Drift = 0.16 dB Peak SAR (extrapolated) = 1.11 W/kg SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.095 W/kg Maximum value of SAR (measured) = 0.826 W/kg	
	

WIFI 5.8GHz

Head	Right cheek
Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 0.98:1 Medium parameters used (interpolated): $f = 5785 \text{ MHz}$; $\sigma = 5.255 \text{ S/m}$; $\epsilon_r = 35.315$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.05, 5.05, 5.05); Calibrated: 2021/10/20; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2021/10/8 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) RC/WIFI5.8/Area Scan (9x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.699 W/kg RC/WIFI5.8/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 5.308 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 1.53 W/kg SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.180 W/kg Maximum value of SAR (measured) = 1.01 W/kg	
	

BT

Head	Right cheek
Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 0.796:1 Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 39.213$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.45, 7.45, 7.45); Calibrated: 2021/10/20; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2021/10/8 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) RC/BT/Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.441 W/kg RC/BT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 5.699 V/m; Power Drift = 0.18 dB Peak SAR (extrapolated) = 0.803 W/kg SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.132 W/kg Maximum value of SAR (measured) = 0.635 W/kg 	

Note: All the modulated signal with different PAR (refers to RF WWAN report) already take into account, but not mentioned in this inherent log file template.