



# TEST REPORT

<b>Eurofins KCTL Co.,Ltd.</b> 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 <a href="http://www.kctl.co.kr">www.kctl.co.kr</a>	Report No.: <b>KR25-SRF0082-A</b> Page (1) of (15)	<b>eurofins</b>   <b>KCTL</b>
---	--	-------------------------------

**1. Applicant**

◦ Name : Samsung Electronics Co., Ltd.

◦ Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**2. Use of Report** : Certification

**3. Type of Equipment / Model** : HASS Converter / MIM-S10UN

**4. FCC ID** : A3LMIMS10UN

**5. IC Certificate No.** : 649E-MIMS10UN

**6. Date of Test** : 2025-02-25 to 2025-03-21

**Date of Issuing** : 2025-04-15

**7. Test Standard(method) used** : FCC Part 15 Subpart E, 15.407  
 RSS-247 Issue 3 August 2023  
 RSS-Gen Issue 5 February 2021

**8. Test Result** : Refer to the test result in the test report

Affirmation	Tested by  Name : Hosung Lee (Signature)	Technical Manager  Name : Harim Lee (Signature)
-------------	--	---

2025-04-15

**Eurofins KCTL Co.,Ltd.**

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.

## REPORT REVISION HISTORY

Date	Revision	Page No
2025-03-28	Originally issued	-
2025-04-15	Updated	5

*This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.*

Note. The report No. KR25-SRF0082 is superseded by the report No. KR25-SRF0082-A.

## General remarks for test reports

### Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:


### Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ Statement not required by the standard or client used for type testing

# CONTENTS

- 1. General information.....4
- 2. Device information .....4
  - 2.1. Frequency/channel operations.....5
- 3. Measurement uncertainty .....5
- 3. Summary of tests .....6
- 4 Test results.....7
  - 4.1. DFS (Dynamic Frequency Selection).....7
- 5. Measurement Equipment..... 15

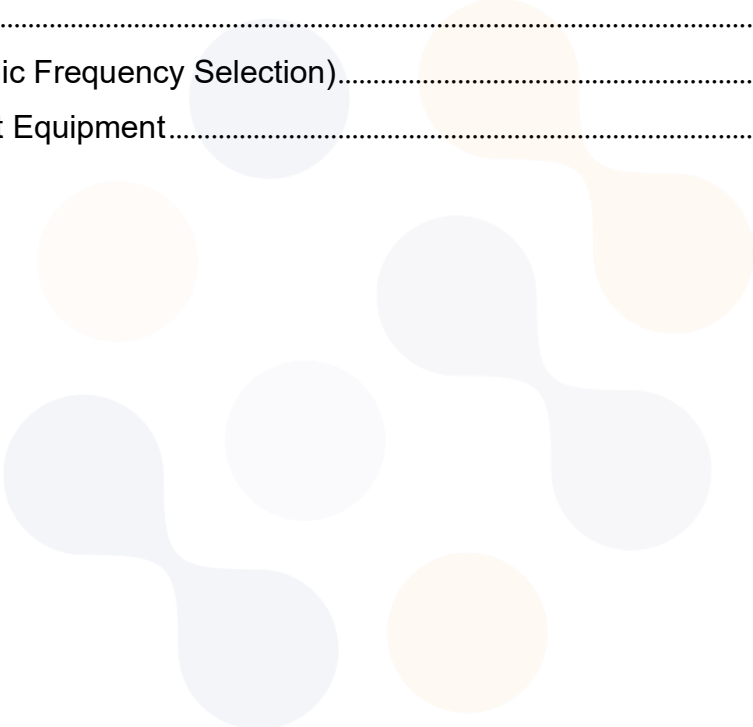

## 1. General information

Client : Samsung Electronics Co., Ltd.  
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea  
 Manufacturer : Samsung Electronics Co., Ltd.  
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea  
 Factory : SAMSUNG ELECTRONICS VIETNAM CO.,LTD.(SEV)  
 Address : Khu Cong nghiep Yen Phong 1, Yen Trung, Yen Phong, Bac Ninh, Viet Nam  
 Laboratory : Eurofins KCTL Co.,Ltd.  
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea  
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132  
 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056  
 CAB Identifier: KR0040  
 ISED Number: 8035A  
 KOLAS No.: KT231

## 2. Device information

Equipment under test : HASS Converter  
 Model : MIM-S10UN  
 Derivative Model : VCTRL13P-1, MIM-S10N  
 Modulation technique : Bluetooth Low Energy : GFSK  
 WIFI(802.11a/b/g/n) : DSSS, OFDM  
 Number of channels : Bluetooth Low Energy : 40 ch  
 2.4GHz WIFI(802.11b/g/n) : 11 ch  
 5GHz WIFI(802.11a/n)  
 UNII-1 : 4 ch (20 MHz)  
 UNII-2A : 4 ch (20 MHz)  
 UNII-2C : 12 ch (20 MHz)  
 UNII-3 : 5 ch (20 MHz)  
 Power source : DC 12.0 V  
 Antenna specification : PCB Antenna  
 Antenna gain : Bluetooth Low Energy : 2.09 dBi  
 2.4GHz WIFI(802.11b/g/n) : 2.09 dBi  
 5GHz WIFI(802.11a/n)  
 UNII-1 : 2.46 dBi  
 UNII-2A : 2.99 dBi  
 UNII-2C : 3.70 dBi  
 UNII-3 : 3.81 dBi  
 Frequency range : Bluetooth Low Energy : 2 402 MHz ~ 2 480 MHz  
 2.4GHz WIFI(802.11b/g/n) : 2 412 MHz ~ 2 462 MHz  
 5GHz WIFI(802.11a/n)  
 UNII-1 : 5 180 MHz ~ 5 240 MHz  
 UNII-2A : 5 260 MHz ~ 5 320 MHz  
 UNII-2C : 5 500 MHz ~ 5 720 MHz  
 UNII-3 : 5 745 MHz ~ 5 825 MHz  
 Software version : DB92-00001A/18.05.16  
 Hardware version : v0.5  
 Test device serial No. : Conducted : 07DB8104692ADV NAXC90013  
 : Radiated : 07DB8104692ADV NAXC90010  
 Operation temperature : -10 °C ~ 50 °C

## 2.1. Frequency/channel operations

This device contains the following capabilities:  
 WLAN (11a/n\_HT20)

UNII-1	
Ch.	Frequency (MHz)
36	5 180
·	·
40	5 200
·	·
48	5 240

Table 2.1-1. 802.11a/n(HT20)

UNII-2A	
Ch.	Frequency (MHz)
52	5 260
·	·
56	5 280
·	·
64	5 320

Table 2.1-2. 802.11a/n(HT20)

UNII-2C	
Ch.	Frequency (MHz)
100	5 500
·	·
116	5 580
·	·
144	5 720

Table 2.1-3. 802.11a/n(HT20)

UNII-3	
Ch.	Frequency (MHz)
149	5 745
·	·
157	5 785
·	·
165	5 825

Table 2.1-4. 802.11a/n(HT20)

### Notes:

1. The device supports DFS bands between UNII-2A and UNII-2C and operates as a slave device controlled by master.
2. The device basically operates as a client and only operates in non-DFS bands when operating in Hotspot(Soft AP) mode.

## 3. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty (±)
Dinamic Frequency Selection	0.1 ms

### 3. Summary of tests

FCC Part section(s)	IC Rule Reference	Parameter	Test results
15.407(h)	RSS-247 Issue 3, 6.3	DFS -Channel closing transmission time -Channel move time -Non occupied period	Pass

**Notes:**

- The test procedure(s) in this report were performed in accordance as following.
  - ♦ KDB 905462 D02 UNII DFS compliance procedure new rules.
  - ♦ KDB 905462 D03 UNII client without radar detection new rules.
- The device does not support radar detection feature.



## 4 Test results

### 4.1. DFS (Dynamic Frequency Selection)

#### Test description

#### - Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

#### - Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	<u>Yes</u>
Channel Move Time	Yes	<u>Yes</u>
Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	<u>Test using the widest BW mode available for the link</u>
All other tests	Any single BW mode	Not required

**Note:** Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

#### - Requirements of client devices



- a) A Client Device will not transmit before having received appropriate control signals from a Master Device.
- b) A Client Device will stop all its transmissions whenever instructed by a Master Device to which it is associated and will meet the Channel Move Time and Channel Closing Transmission Time requirements. The Client Device will not resume any transmissions until it has again received control signals from a Master Device.
- c) If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the Master Device detecting the Radar Waveform and d) through f) of section 5.1.1 apply.
- d) Irrespective of Client Device or Master Device detection the Channel Move Time and Channel Closing Transmission Time requirements remain the same.
- e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes. Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy

**- DFS Response requirement values**

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.



### - Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
$\geq 200$ milliwatt	-64 dBm
$< 200$ milliwatt $\text{power spectral density} < 10 \text{ dBm/MHz}$	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dB<sub>i</sub> receive antenna

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

### - Radar test waveforms

Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
<u>0</u>	<u>1</u>	<u>1428</u>	<u>18</u>	<u>See Note 1</u>	<u>See Note 1</u>
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup}\left\{\left(\frac{1}{360}\right) \cdot \left(\frac{19 \cdot 10^6}{PRI_{\mu\text{sec}}}\right)\right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

Note 2: This report was applied Short Pulse Radar Type 0.

\*Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μs)	Chirp Width (MHz)	PRI (μs)	Number of Pulses per Burst	Number of Bursts	Minimum percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30


\*Long Pulse Radar Test Waveform

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (μs)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

\*Frequency Hopping Radar Test Waveform

## Test setup

### - Setup for Client with injection at the Master

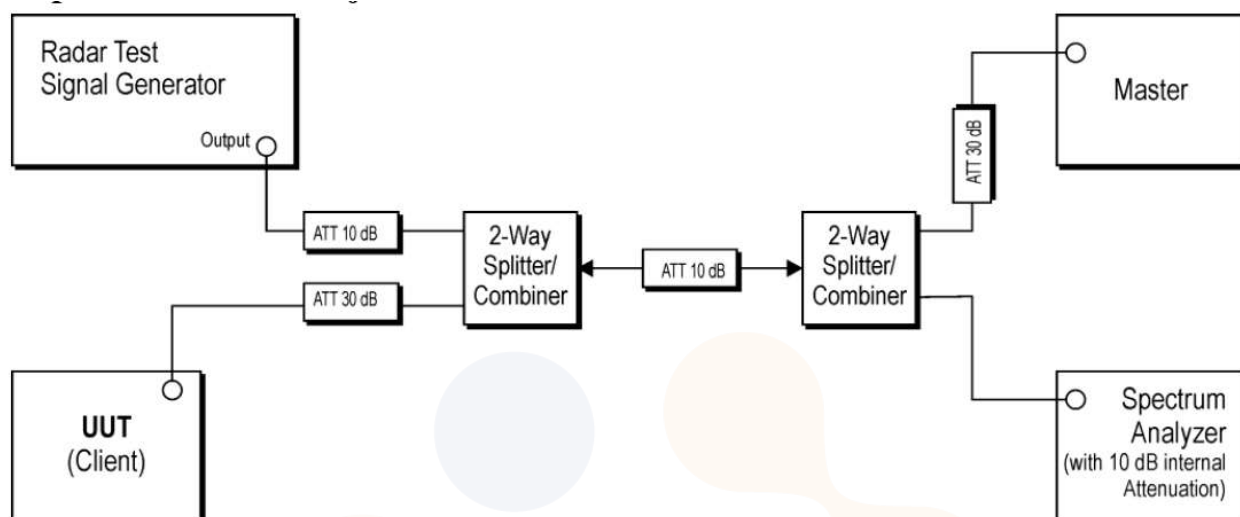

### - Spectrum analyzer setting parameter

This setting parameter is shown below and it according to the 905462 D02 UNII DFS Compliance Procedures New Rules.

- 1) RBW/VBW  $\geq 3$  MHz
- 2) Detector = peak
- 3) Span = zero span

### - Conducted test procedure

- 1) One frequency will be chosen from the Operating Channels of the UUT within the 5 250-5 350 MHz or 5 470-5 725 MHz bands.
- 2) The Client Device (EUT) is set up the above diagram and communications between the Master device and the Client is established.
- 3) Stream the channel loading test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
- 4) An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- 5) Observe the transmissions of the UUT at the end of the Burst on the Operating Channel for duration greater than 12 seconds for Radar Type 0 to ensure detection occurs.
- 6) After the initial radar burst the channel is monitored for 30 minutes to ensure no transmissions or beacons occur. A second monitoring setup is used to verify that the Master and Client have both moved to different channels.


### - Master device information

Equipment Name	Manufacturer	Model No.	Serial No.	FCC ID
Access Point	ASUSTeK Computer Inc.	GT-AXE11000	M6IAJF202801	MSQ-RTAXJF00


## Test result

### Plot of radar waveform

5 320 MHz

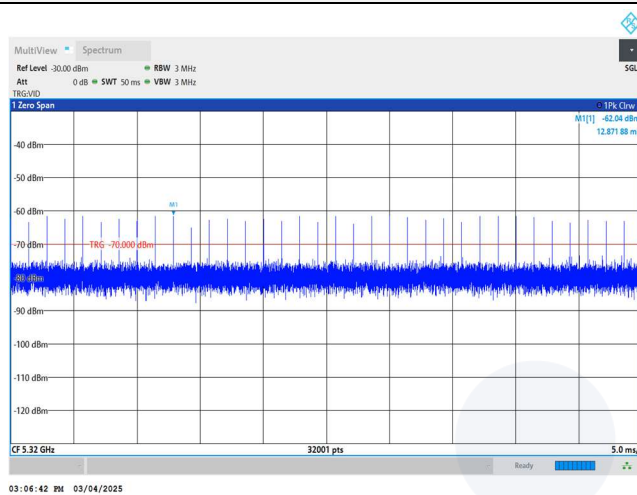


5 500 MHz

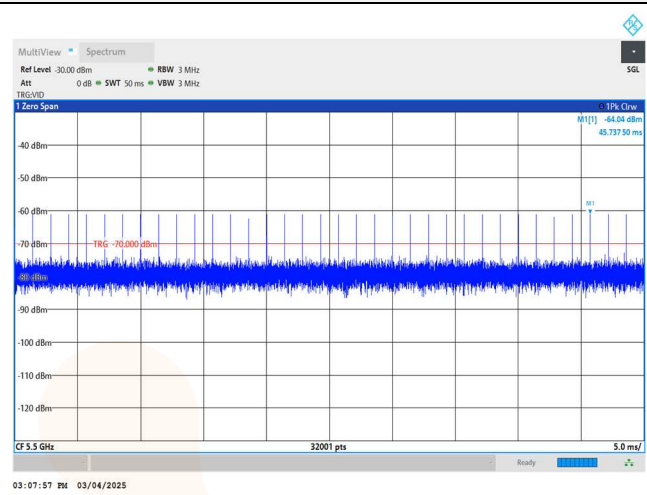


### Plot of LAN traffic

5 320 MHz

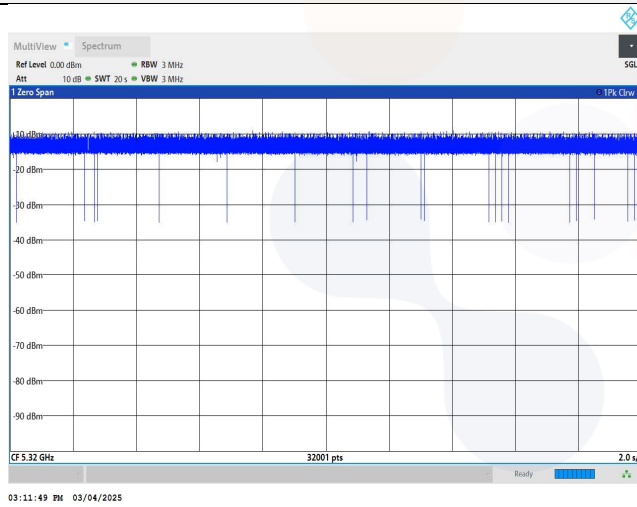


5 500 MHz

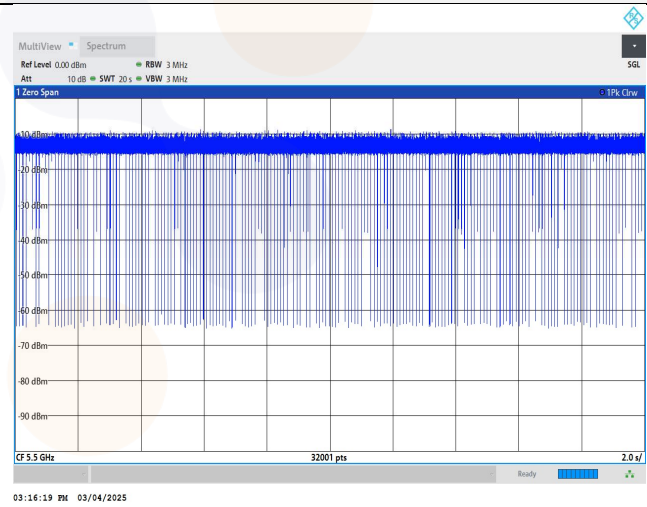


**Plot of channel move time and aggregate time**

**UNII-2A: 802.11 n\_HT20, 5 320 MHz**

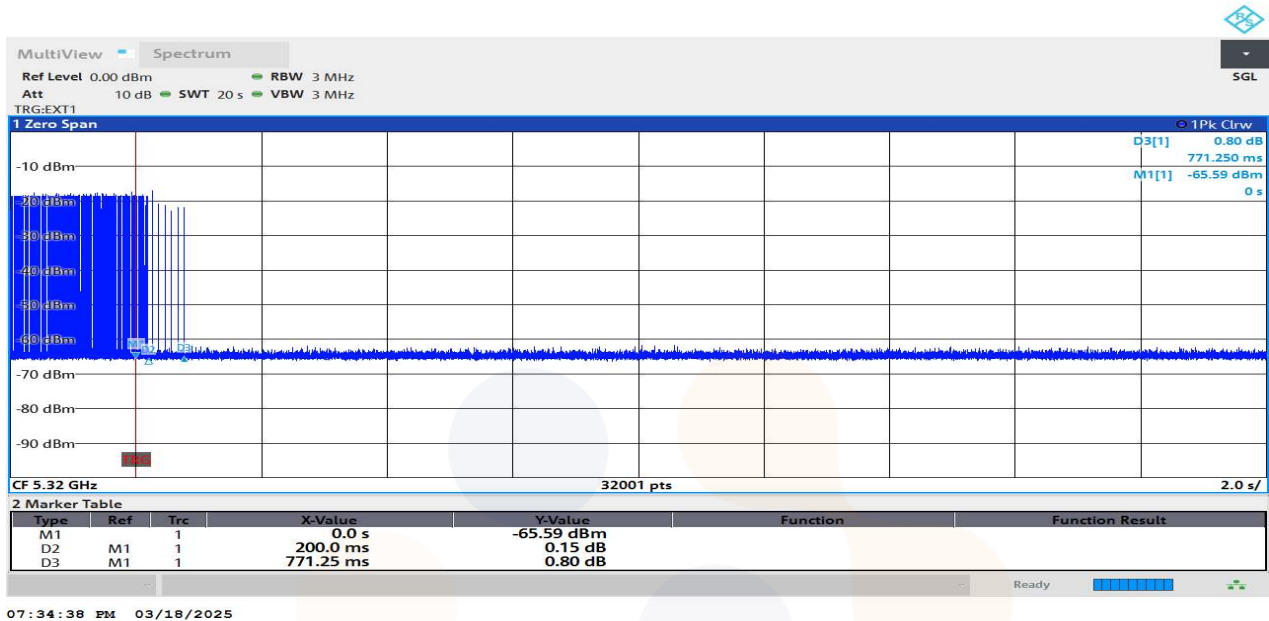

Channel move time = 0.771 250 s  
Closing time = 0.000 625 s x 8 = 0.005 000 s  
(Closing time : Burst unit time(20 s / 32 001 points) \* Number of burst(between 2 markers))


**UNII-2C: 802.11 n\_HT20, 5 500 MHz**

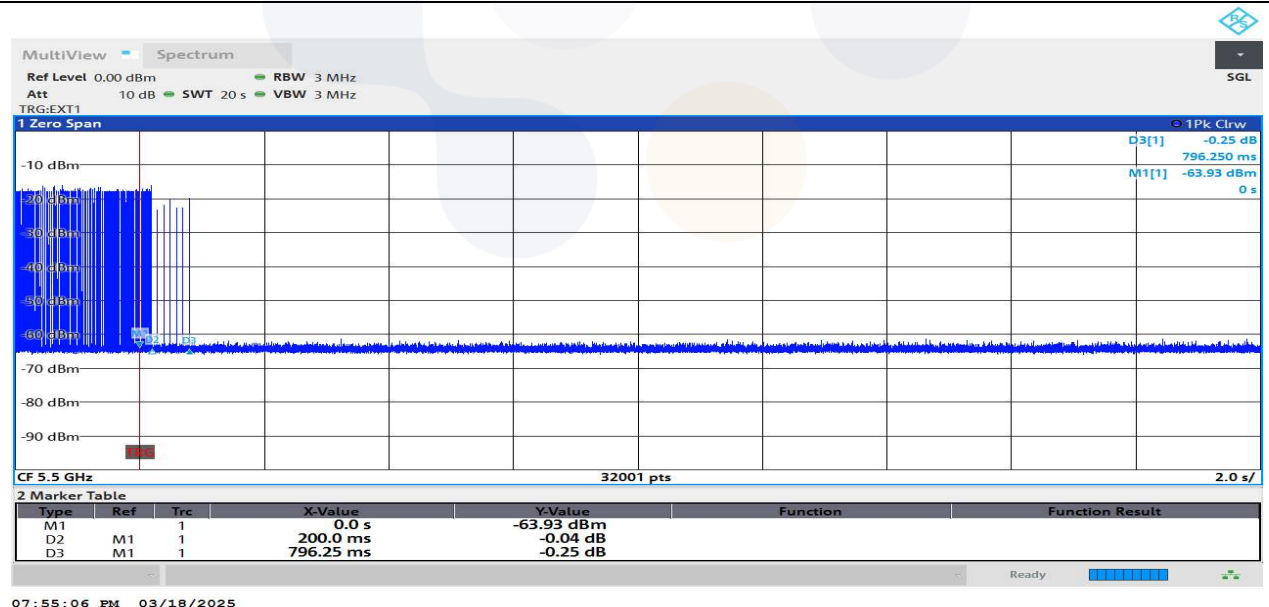


Channel move time = 0.796 250 s  
Closing time = 0.000 625 s x 7 = 0.004 375 s  
(Closing time : Burst unit time(20 s / 32 001 points) \* Number of burst(between 2 markers))

### Plot of Non-occupancy period

5 320 MHz

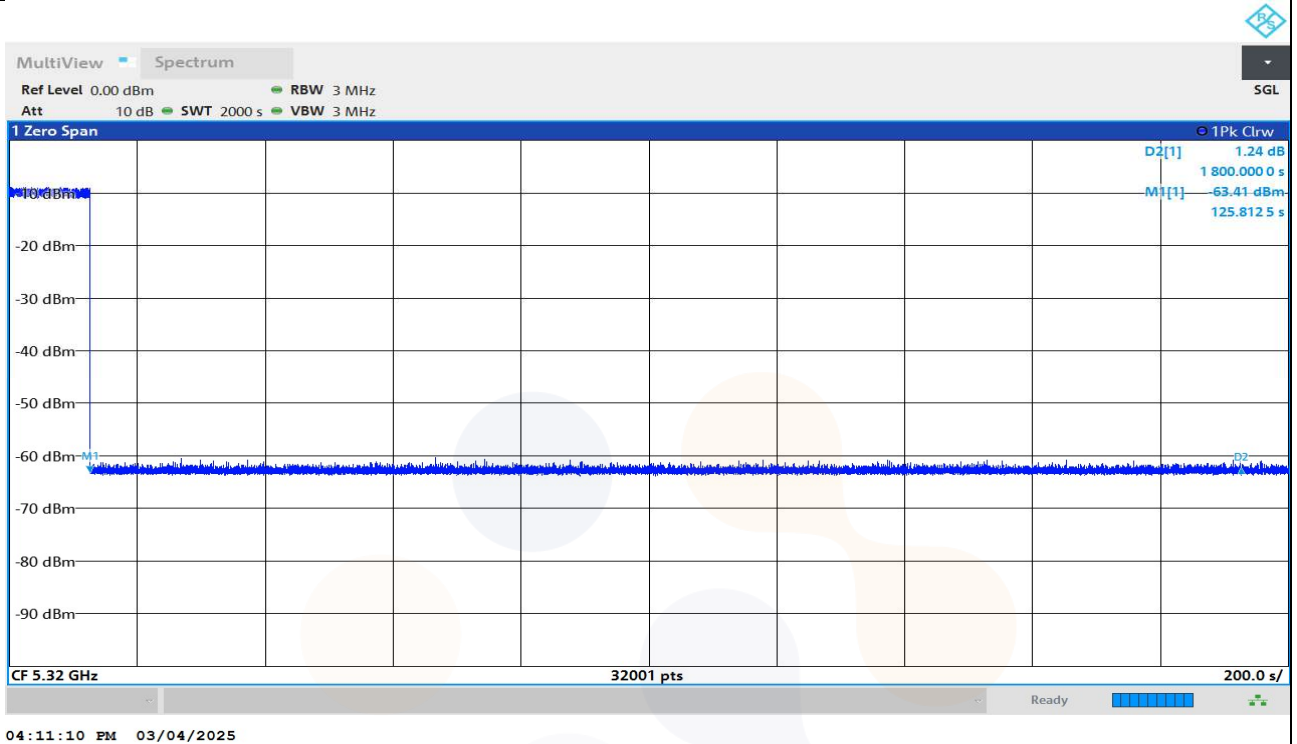

5 500 MHz

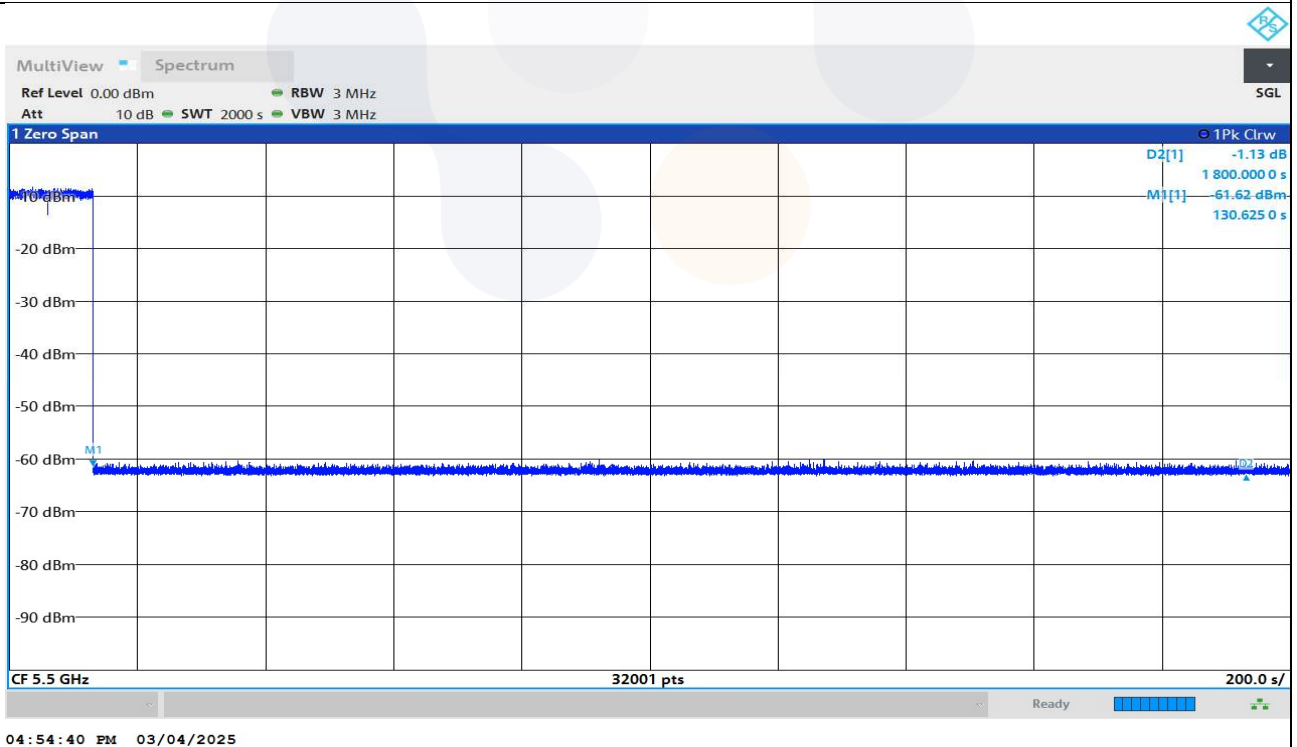

## 5. Measurement Equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV3044	101421	25.07.26
DC Power Supply	AGILENT	E3632A	MY40000265	25.04.24
Attenuator	Weinschel ENGINEERING	56-10	51395	26.01.21
Vector Signal Generator	R&S	SMBV100A	257566	25.07.01
Signal Generator	R&S	SMB100A	176206	26.01.17
Directional Coupler	Marki Microwave, Inc.	CBR17-0026	0001	25.06.24
Power Divider	Aeroflex/ Weinschel, Inc	1580-1	PE430	25.06.24
Power Divider	Aeroflex/ Weinschel, Inc	1580-1	NX380	25.06.24
Step Attenuator	KEYSIGHT	8495D	MY42144296	26.01.20

**End of test report**