



中国认可
国际互认
检测
TESTING
CNAS L5313

Test Report

FCC Part15 Subpart C

Product Name : EZ-BLE PSoC Module

Model No. : CYBLE-014008-00;CYBLE-214009-00

Test Report Certification

Issued Date : Sep. 01, 2016

Report No. : 1672116R-RF-US-P06V01

Product Name : EZ-BLE PSoC Module
Applicant : Cypress Semiconductor
Address : 198 Champion Ct, San Jose, California 95134 United States
Manufacturer : Wujiang Sigmatron Electronics Co., Ltd
Address : 386 Huahong Rd, Wujiang, Suzhou, Jiangsu, China
Model No. : CYBLE-014008-00;CYBLE-214009-00

Laboratory Information

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

Taiwan R.O.C.	:	BSMI, NCC, TAF
USA	:	FCC
Japan	:	VCCI
China	:	CNAS

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://www.quietek.com/english/about/certificates.aspx?bval=5>
The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : http://www.quietek.com/index_en.aspx

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com

LinKou Testing Laboratory :

No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451, Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com

Suzhou Testing Laboratory :

No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006, Jiangsu, China
TEL : +86-512-6251-5088 / FAX : 86-512-6251-5098 E-Mail : service@quietek.com

TABLE OF CONTENTS

Description	Page
1. General Information	6
1.1. EUT Description	6
1.2. Working Frequency of Each Channel:	7
1.3. Antenna information	7
1.4. Mode of Operation	7
1.5. Tested System Details	8
1.6. Configuration of Tested System	9
1.7. EUT Exercise Software	10
2. Technical Test	11
2.1. Summary of Test Result	11
2.2. Test Frequency configuration:	12
2.3. Test Environment	13
2.4. Measurement Uncertainty	13
3. Emissions in restricted frequency bands	14
3.1. Test Equipment	14
3.2. Test Setup	15
3.3. Limit	16
3.4. Test Procedure	18
3.5. EUT test Axis definition	19
3.6. Test Result	20
4. Radiated Emission Band Edge	23
4.1. Test Equipment	23
4.2. Test Setup	24
4.3. Limit	24
4.4. Test Procedure	25
4.5. EUT test definition	26
4.6. Duty Cycle	27
4.7. Test Result	28
5. Fundamental emission output power	36
5.1. Test Equipment	36
5.2. Test Setup	36
5.3. Limit	37
5.4. Test Procedure	38
5.5. EUT test definition	39
5.6. Test Result	40

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1672116R-RF-US-P06V01	V1.0	Initial Issued Report	Aug. 17, 2016
1672116R-RF-US-P06V01	V1.1	Modified the note at P6 and some typo at P23	Sep. 01, 2016

1. General Information

1.1. EUT Description

Product Name	EZ-BLE PSoC Module
Model No.	CYBLE-014008-00;CYBLE-214009-00
Working Voltage	DC 1.9V-5.5V
Bluetooth Specification	V4.1
Frequency Range	2402- 2480 MHz
Channel Number	V4.1: 40
Channel Separation	V4.1: 2MHz
Type of Modulation	V4.1: GFSK
Data Rate	V4.1: 1Mbps(GFSK)
Model No.	CYBLE-214015-01
Working Voltage	DC 1.9V-5.5V
Bluetooth Specification	V4.2
Frequency Range	2402- 2480 MHz
Channel Number	V4.2: 40
Channel Separation	V4.2: 2MHz
Type of Modulation	V4.2: GFSK
Data Rate	V4.2: 1Mbps(GFSK)
Antenna Type	Reference to Antenna List
Peak Antenna Gain	Reference to Antenna List

Note1: Modules CYBLE-014008-00, CYBLE-214009-00 and CYBLE-214015-01 have the same PCB, periphery parts and the encapsulation of the main chip. The difference of the main chip is Bluetooth version it supports.

Note2: Output power of the new model is less than the two original models, and RF exposure levels didn't degrade, so only these items were tested for compliance.

Module	IC Part Number	CPU Speed (MHz)	Flash Size (KB)	Package	Bluetooth version
CYBLE-014008-00	CY8C4247FNI-BL483	48	128	WLCSP-68	4.1
CYBLE-214009-00	CY8C4248FNI-BL483	48	256	WLCSP-76	4.1
CYBLE-214015-01	CY8C4248FNI-BL583	48	256	WLCSP-76	4.2

1.2. Working Frequency of Each Channel:

Bluetooth Working Frequency of Each Channel: (For BLE)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

1.3. Antenna information

Model No.	N/A					
Antenna manufacturer	N/A					
Antenna Delivery	☒	1*TX+1*RX	☐	2*TX+2*RX	☐	3*TX+3*RX
Antenna technology	☒	SISO				
	☐	MIMO	☐	Basic		
			☐	CDD		
			☐	Beam-forming		
Antenna Type	☐	External	☐	Dipole		
	☒	Internal	☐	PIFA		
			☒	PCB		
			☐	Ceramic Chip Antenna		
			☐	Metal plate type F antenna		
Antenna Gain	-0.5dBi					

1.4. Mode of Operation

Test Mode
Mode 1: Transmit


1.5. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Think Pad	2526	LV-A3285	Power by adapter

1.6. Configuration of Tested System

Test setup Diagram- Radiated Emission

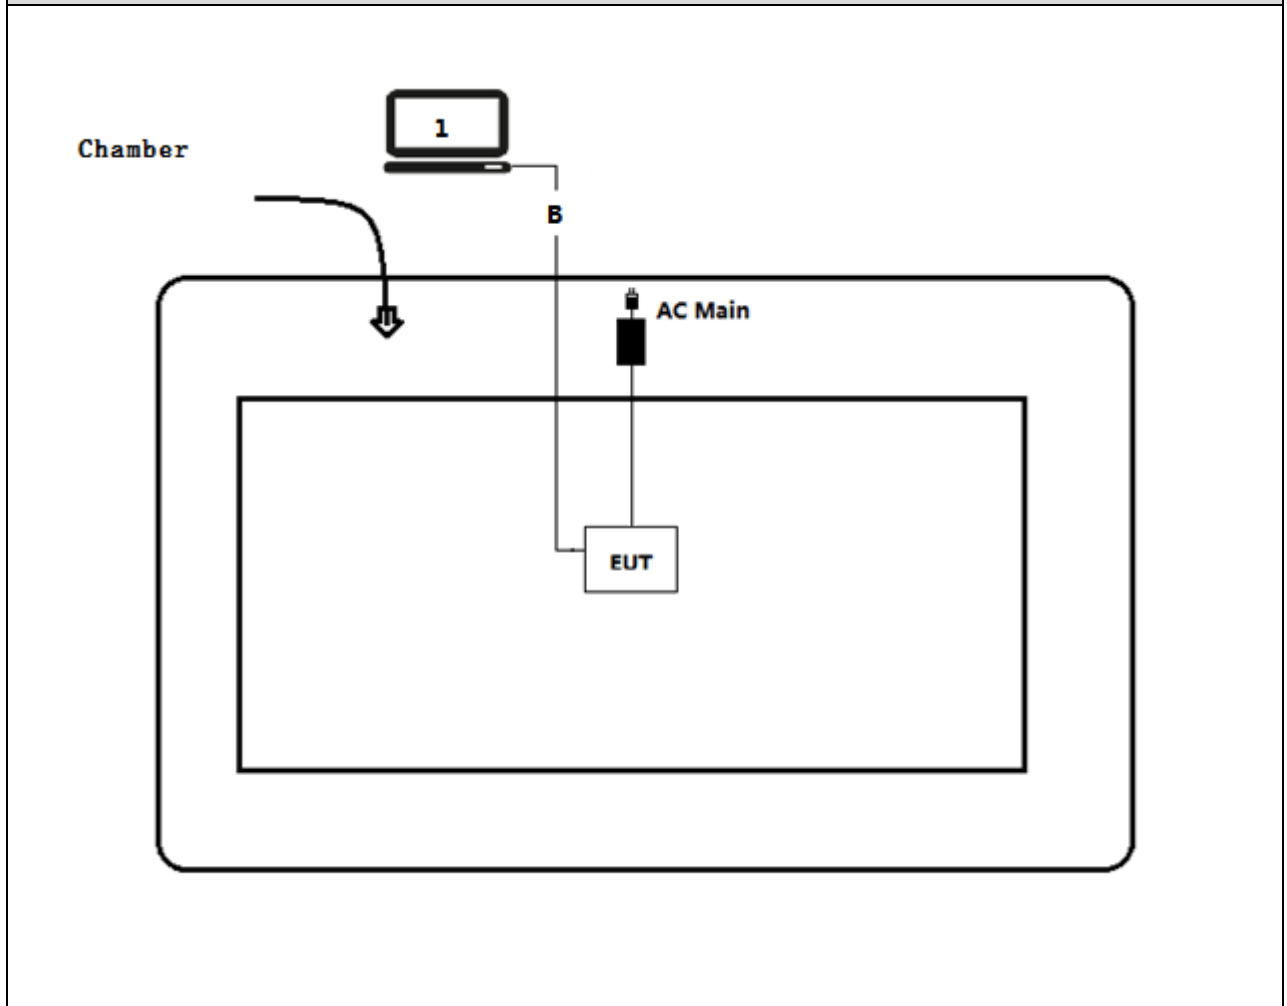

1.7. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	Run the RF test software, and set the test mode and channel, then press OK to start continue receive.

2. Technical Test

2.1. Summary of Test Result

For FCC

Performed Test Item	Normative References	Worst case mode	Limit	Result
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209	Mode 1	FCC 15.209	PASS
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2015 15.247(d)	Mode 1	FCC 15.209	PASS
RFundamental emission output power	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(3)	Mode 1		

2.2. Test Frequency configuration:

Bluetooth Working Frequency of Each Channel: (For BLE)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

2.3. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

2.4. Measurement Uncertainty

Test Items	Uncertainty
------------	-------------

AC Power Line Conducted Emission

3. Emissions in restricted frequency bands


3.1. Test Equipment

Radiated Emission(Below 1GHz) / AC-2					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2016.03.05	2017.03.04
Loop Antenna	R&S	HFH2-Z2	833799/003	2015.11.16	2016.11.17
Bilog Chainenna	Teseq GmbH	CBL6112D	27611	2015.10.16	2016.10.15
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2016.03.02	2017.03.01
Temperature/Humidity Meter	Zhichen	ZC1-2	AC2-TH	2016.01.04	2017.01.03
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					


Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2016.01.04	2017.01.03
Preamplifier	Miteq	NSP1800-25	1364185	2016.05.03	2017.05.03
Preamplifier	QuieTek	AP-040G	CHM-0906001	2016.05.06	2017.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2016.01.22	2017.01.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2015.11.25	2016.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2016.03.02	2017.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2016.03.02	2017.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2016.03.02	2017.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2017.07.16	2017.07.16
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2016.01.04	2017.01.03
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

3.2. Test Setup


Below 30MHz Test Setup:

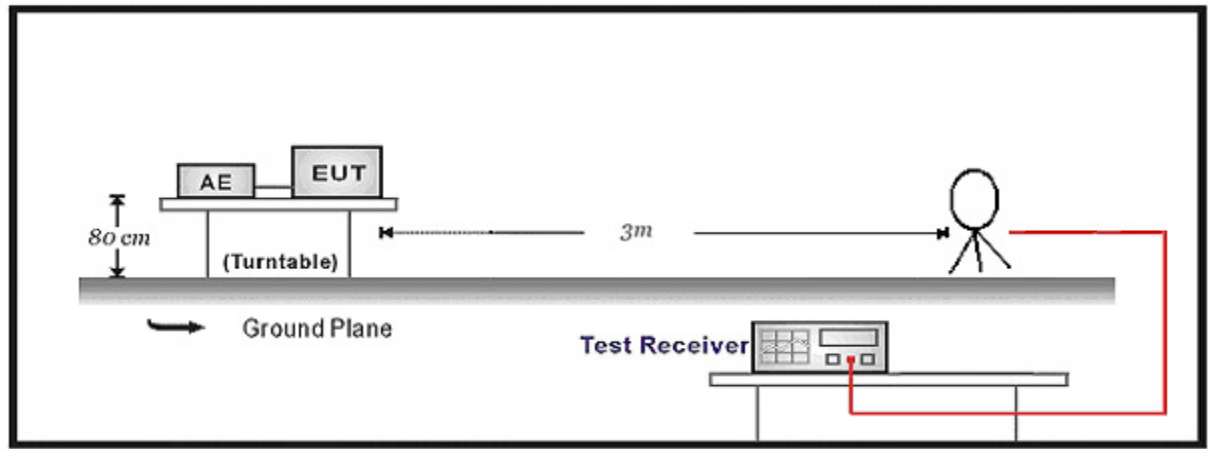

30MHz-1GHz Test Setup:

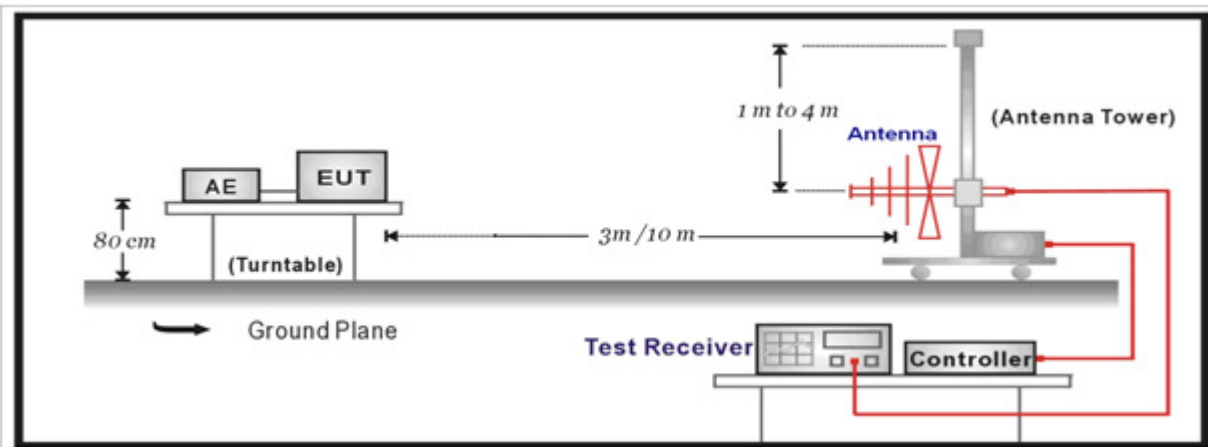

Above 1GHz Test Setup:

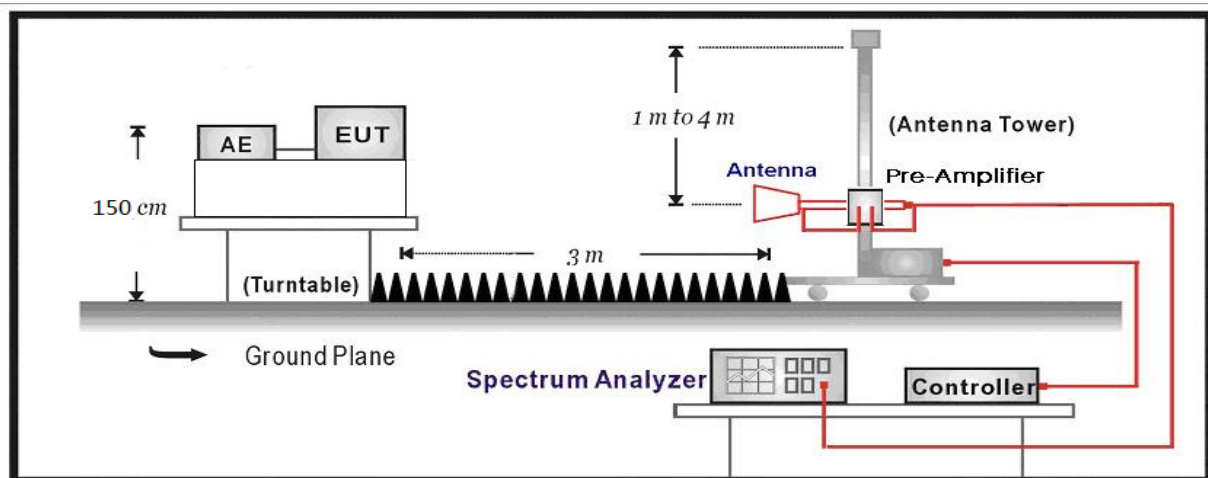

3.3. Limit

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Band Emissions Limit




Frequency
(MHz)

Field strength
(

3.4. Test Procedure

Test Method						
	References Rule			Chapter	Description	
☐	ANSI C63.10			11.11	Emissions in non-restricted frequency bands	
	☐	ANSI C63.10		11.11.2	Reference level measurement	
	☐	ANSI C63.10		11.11.3	Emission level measurement	
☒	ANSI C63.10			11.12	Emissions in restricted frequency bands	
	☒	ANSI C63.10		11.12.1	Radiated emission measurements	
	☒	ANSI C63.10		11.12.2.7	Radiated spurious emission test	
		☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz	
		☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz	
		☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz	
	☒	ANSI C63.10		11.12.2	Antenna-port conducted measurements	
		☒	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure	
		☒	ANSI C63.10	11.12.2.4	Peak power measurement procedure	
		☒	ANSI C63.10	11.12.2.5	Average power measurement procedures	
			☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
			☐	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
			☒	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold

3.5. EUT test Axis definition

Item	Emissions in non-restricted frequency bands			
Device Category	☒	Fixed position use		
	☐	Mobile position use		
Test mode	Mode 1			
Test method	☒	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☒
	☐	Conducted		
	☒	Chain 1		
				
	☐	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				


3.6. Test Result

Product Name	:	EZ-BLE PSoC Module	Power	:	AC 120V/60Hz
Test Mode	:	Mode 1	Test Site	:	AC-5

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dB)
-------	----	---------	--------------------	--------------------------


The worst case of Radiated Emission below 1GHz:

Site: AC2	Time: 2016/08/05 - 11:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_10M(30-1000M)20150408	Polarity: Horizontal
EUT: EZ-BLE PSoC Module	Power: AC 120V/60Hz
Note: Mode 1	

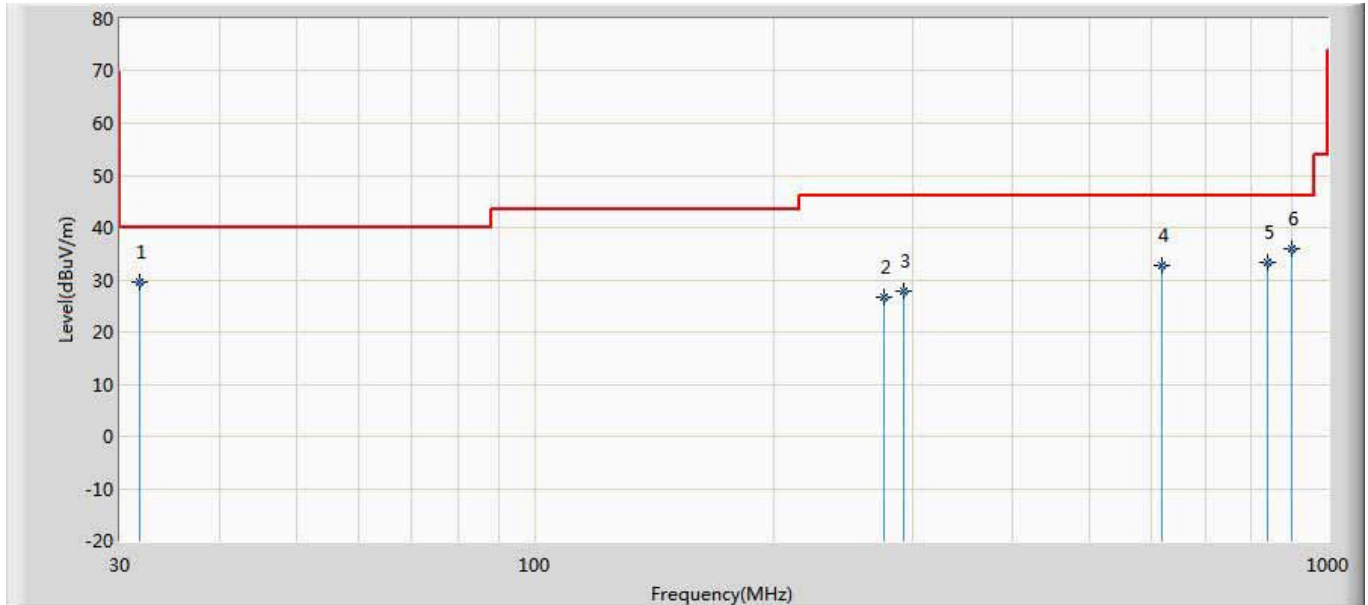

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		31.750	29.437	2.200	-10.563	40.000	27.237	QP
2		276.040	26.599	7.200	-19.401	46.000	19.399	QP
3		292.340	27.796	7.200	-18.204	46.000	20.596	QP
4		618.240	32.614	2.200	-13.386	46.000	30.414	QP
5		839.140	33.450	2.400	-12.550	46.000	31.050	QP
6	*	898.350	35.926	3.200	-10.074	46.000	32.726	QP

Site: AC2	Time: 2016/08/05 - 11:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_10M(30-1000M)20150408	Polarity: Vertical
EUT: EZ-BLE PSoC Module	Power: AC 120V/60Hz
Note: Mode 1	

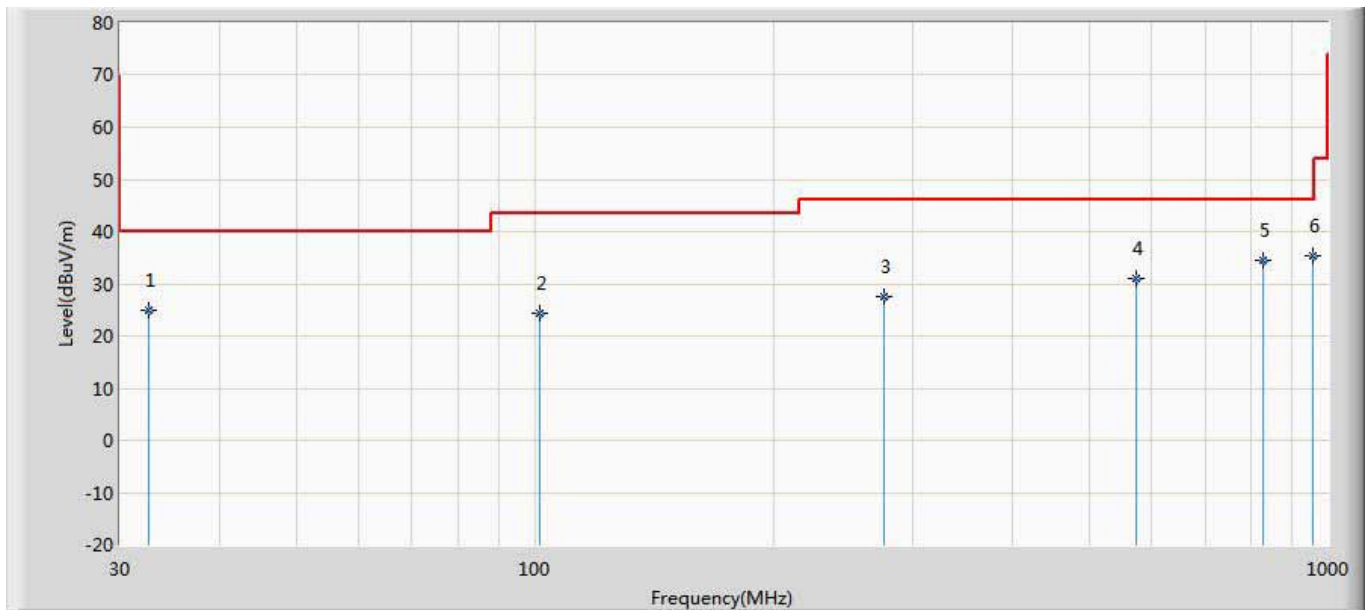

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		32.560	24.811	1.500	-15.189	40.000	23.311	QP
2		101.590	24.243	2.100	-19.257	43.500	22.142	QP
3		276.150	27.581	3.300	-18.419	46.000	24.281	QP
4		572.360	30.970	3.900	-15.030	46.000	27.069	QP
5		828.340	34.460	1.900	-11.540	46.000	32.560	QP
6	*	957.120	35.300	2.100	-10.700	46.000	33.200	QP


4. Radiated Emission Band Edge

4.1. Test Equipment

Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2016.01.04	2017.01.03
Preamplifier	Miteq	NSP1800-25	1364185	2016.05.06	2017.05.05
Preamplifier	QuieTek	AP-040G	CHM-0906001	2016.05.06	2017.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2016.01.22	2017.01.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2015.11.25	2016.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2016.03.02	2017.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2016.03.02	2017.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2016.03.02	2017.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2016.06.10	2017.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2016.01.04	2017.01.03
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

4.2. Test Setup

Above 1GHz Test Setup:

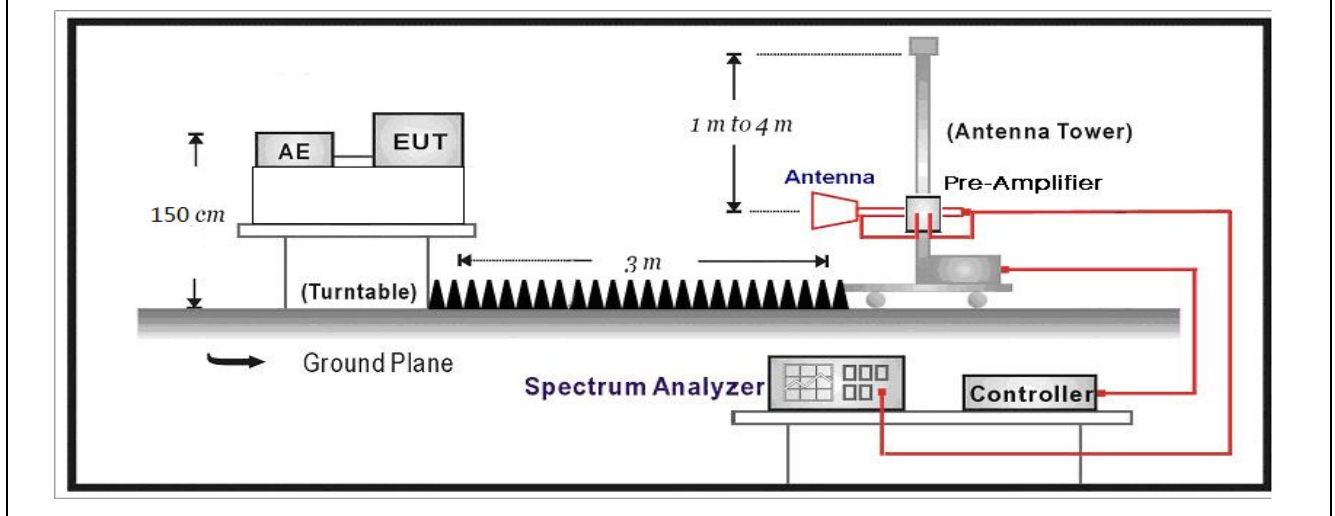

4.3. Limit




Band edge Limit

Frequency bands (MHz)	Detector	Limit (dB)
--------------------------	----------	---------------

4.4. Test Procedure


Test Method					
	References Rule		Chapter	Description	
☒	ANSI C63.10		6.10	Band-edge testing	
	☒	ANSI C63.10	6.10.5	Restricted-band band-edge measurements	
	☐	ANSI C63.10	6.10.6	Marker-delta method	
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands	
	☒	ANSI C63.10	11.12.1	Radiated emission measurements	
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test	
☐	ANSI C63.10		6.4	Radiated emissions from unlicensed wireless devices below 30 MHz	
☐	ANSI C63.10		6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz	
☒	ANSI C63.10		6.6	Radiated emissions from unlicensed wireless devices above 1 GHz	
	☐	ANSI C63.10		11.12.2	Antenna-port conducted measurements
		☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
		☒	ANSI C63.10	11.12.2.4	Peak power measurement procedure
		☒	ANSI C63.10	11.12.2.5	Average power measurement procedures
		☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
		☐	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
		☒	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold

4.5. EUT test definition

Item	Emissions in non-restricted frequency bands			
Device Category	☒	Fixed position use		
	☐	Mobile position use		
Test mode	Mode 1			
Test method	☒	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☒
	☐	Conducted		
	☐	Chain 1		
				
	☐	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				


4.6. Duty Cycle

Test Mode	Tx On (ms)	Tx Off (ms)	Reduced VBW (kHz)	Tx On + Tx Off (ms)	Duty Cycle
BLE	2.126	0.374	0.47	2.500	BLE

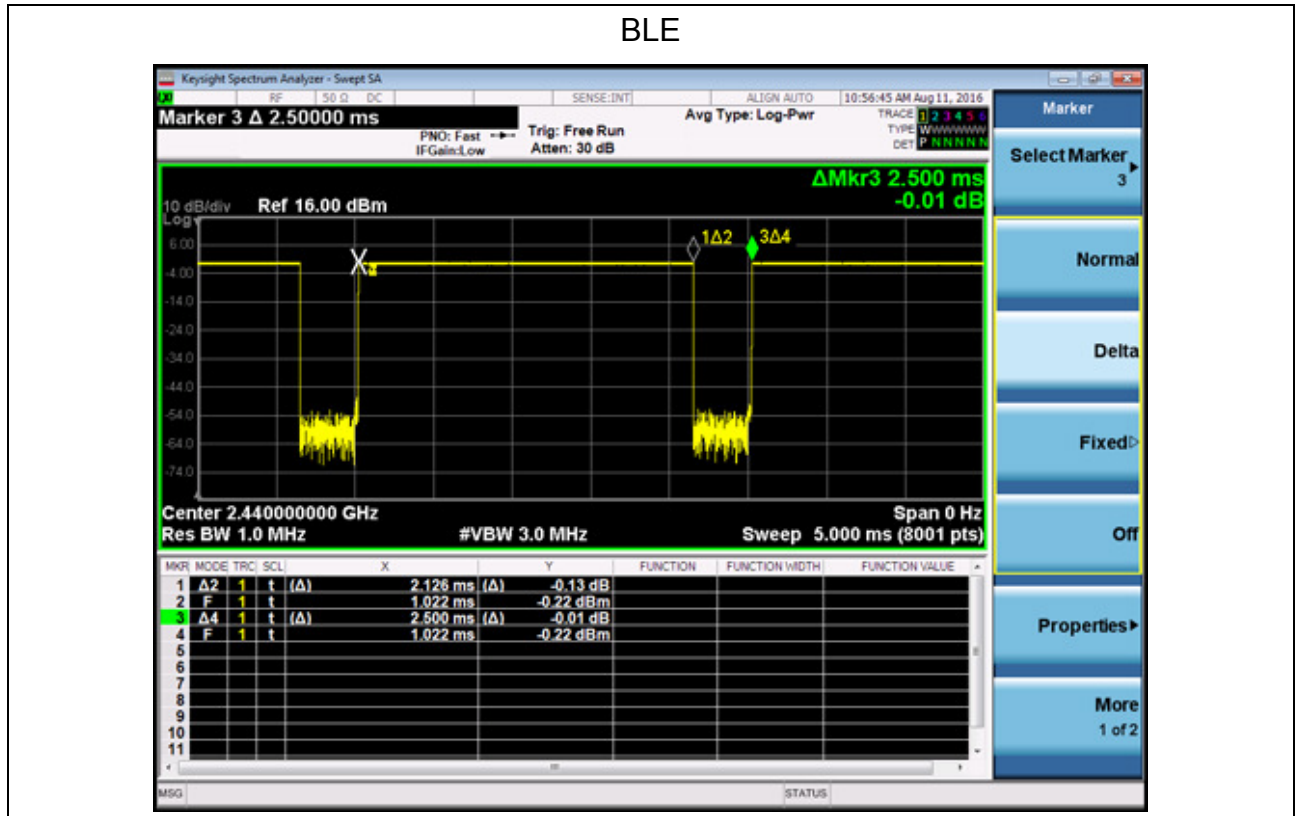


4.7. Test Result

Engineer: Scott	
Site: AC5	Time: 2016/08/11 - 09:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BLE PSoC Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at CH2402Mhz by BLE	

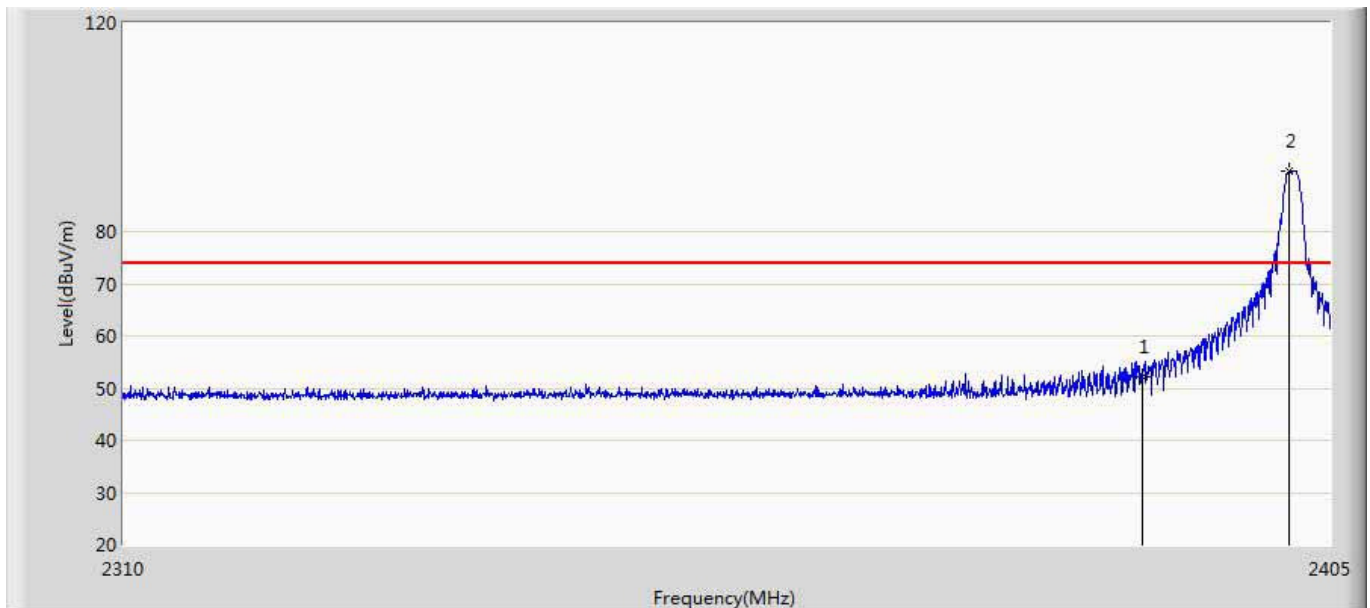


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	52.044	16.362	-21.956	74.000	35.682	PK
2	*	2401.675	91.586	55.874	17.586	74.000	35.712	PK

Engineer: Scott	
Site: AC5	Time: 2016/08/11 - 09:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BLE PSoC Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at CH2402Mhz by BLE	

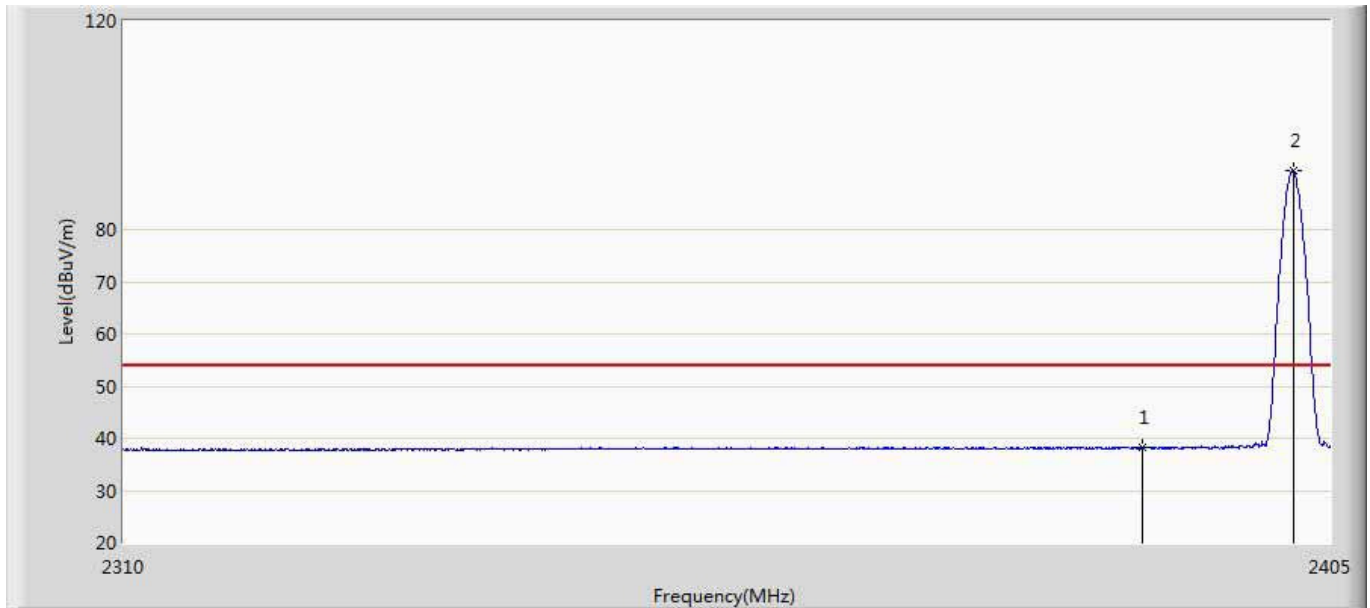


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.231	2.549	-15.769	54.000	35.682	AV
2	*	2402.055	91.246	55.533	37.246	54.000	35.712	AV

Engineer: Scott	
Site: AC5	Time: 2016/08/11 - 09:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BLE PSoC Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at CH2402Mhz by BLE	

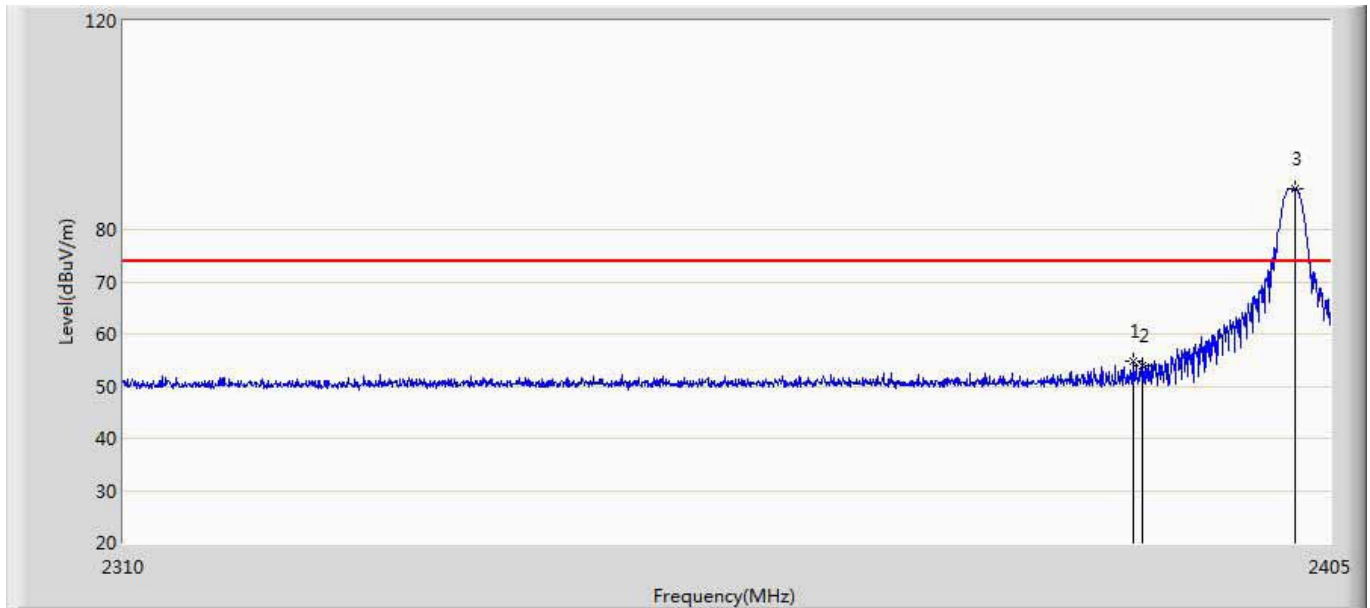


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2389.230	54.654	18.974	-19.346	74.000	35.680	PK
2		2390.000	53.900	18.218	-20.100	74.000	35.682	PK
3	*	2402.245	87.870	52.157	13.870	74.000	35.714	PK

Engineer: Scott	
Site: AC5	Time: 2016/08/11 - 09:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BLE PSoC Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at CH2402Mhz by BLE	

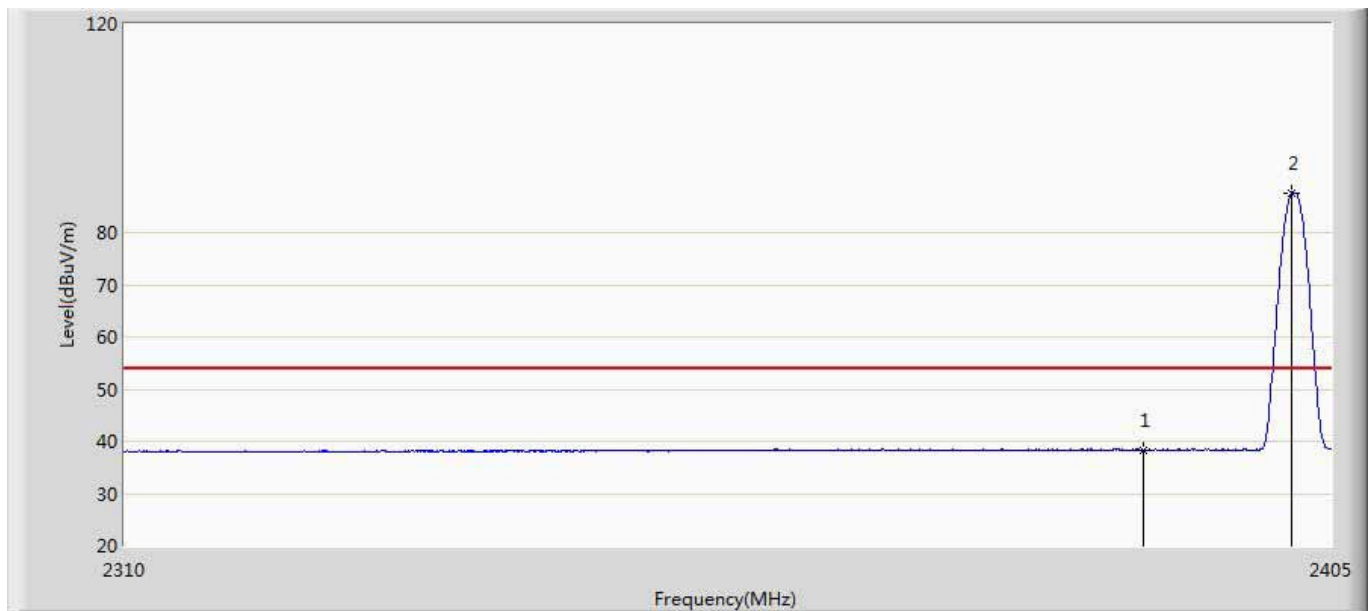


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.350	2.668	-15.650	54.000	35.682	AV
2	*	2401.817	87.571	51.859	33.571	54.000	35.712	AV

Engineer: Scott	
Site: AC5	Time: 2016/08/11 - 09:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BLE PSoC Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at CH2480Mhz by BLE	

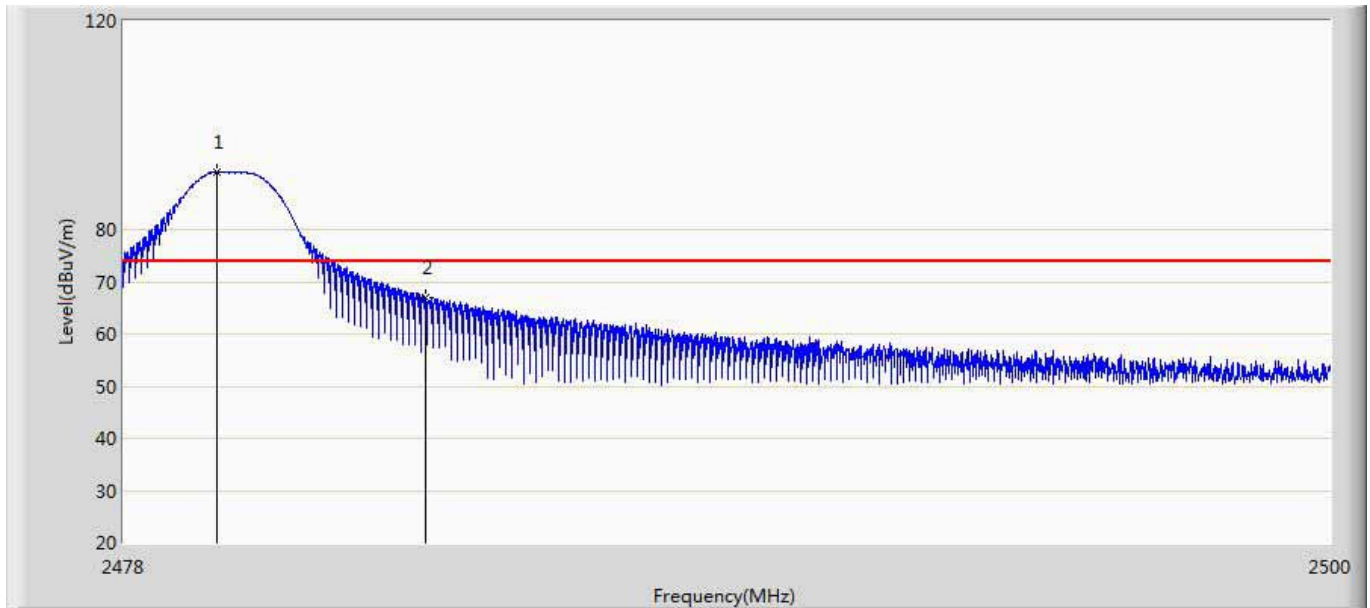


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.705	91.060	55.196	17.060	74.000	35.864	PK
2		2483.500	66.875	30.983	-7.125	74.000	35.891	PK

Engineer: Scott	
Site: AC5	Time: 2016/08/11 - 09:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BLE PSoC Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at CH2480Mhz by BLE	

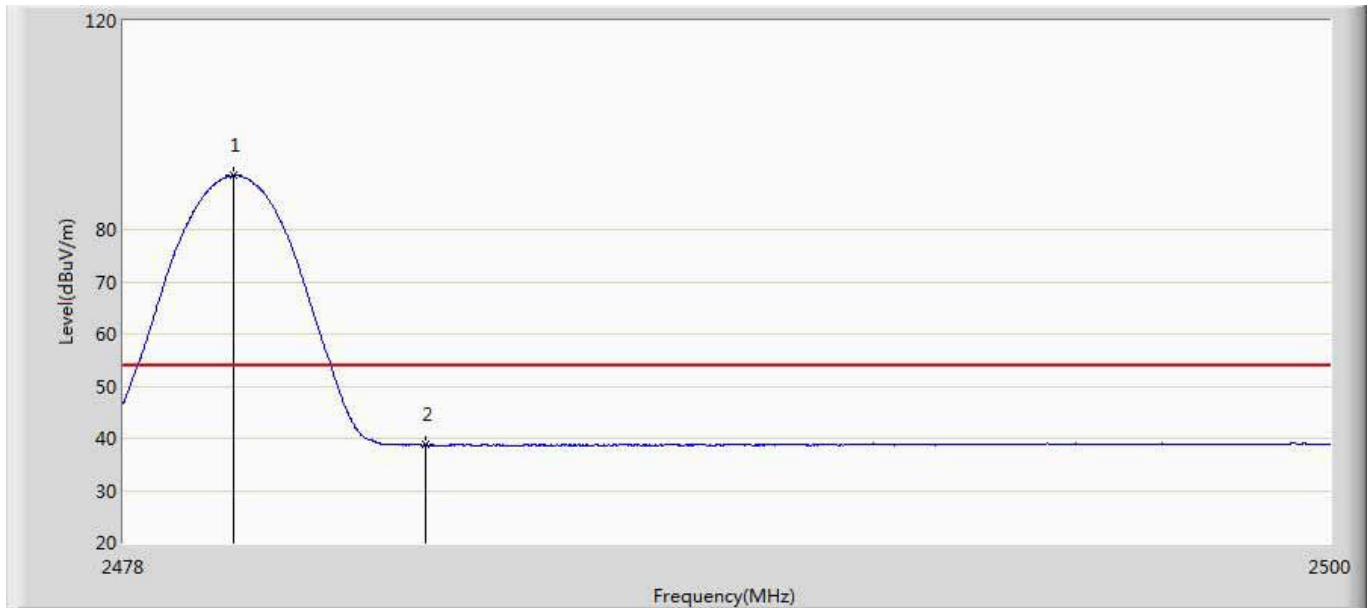


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.013	90.354	54.488	36.354	54.000	35.866	AV
2		2483.500	38.706	2.814	-15.294	54.000	35.891	AV

Engineer: Scott	
Site: AC5	Time: 2016/08/11 - 09:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BLE PSoC Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at CH2480Mhz by BLE	

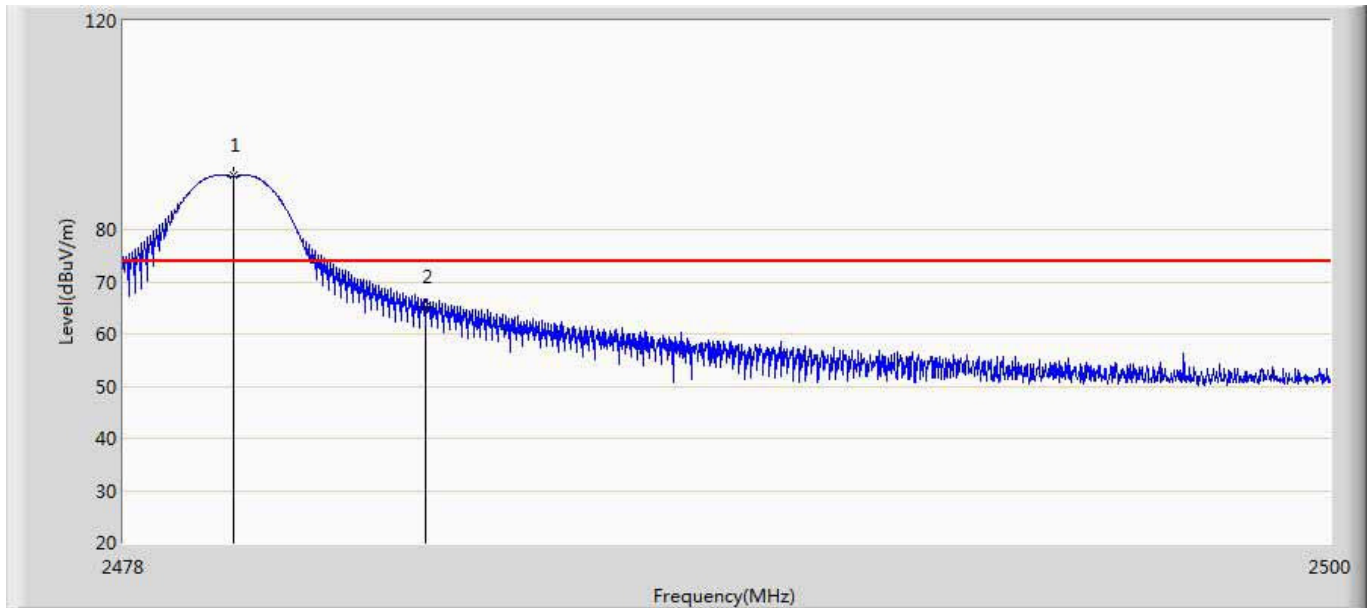

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.002	90.361	54.495	16.361	74.000	35.866	PK
2		2483.500	65.140	29.248	-8.860	74.000	35.891	PK

Engineer: Scott	
Site: AC5	Time: 2016/08/11 - 09:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BLE PSoC Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at CH2480Mhz by BLE	

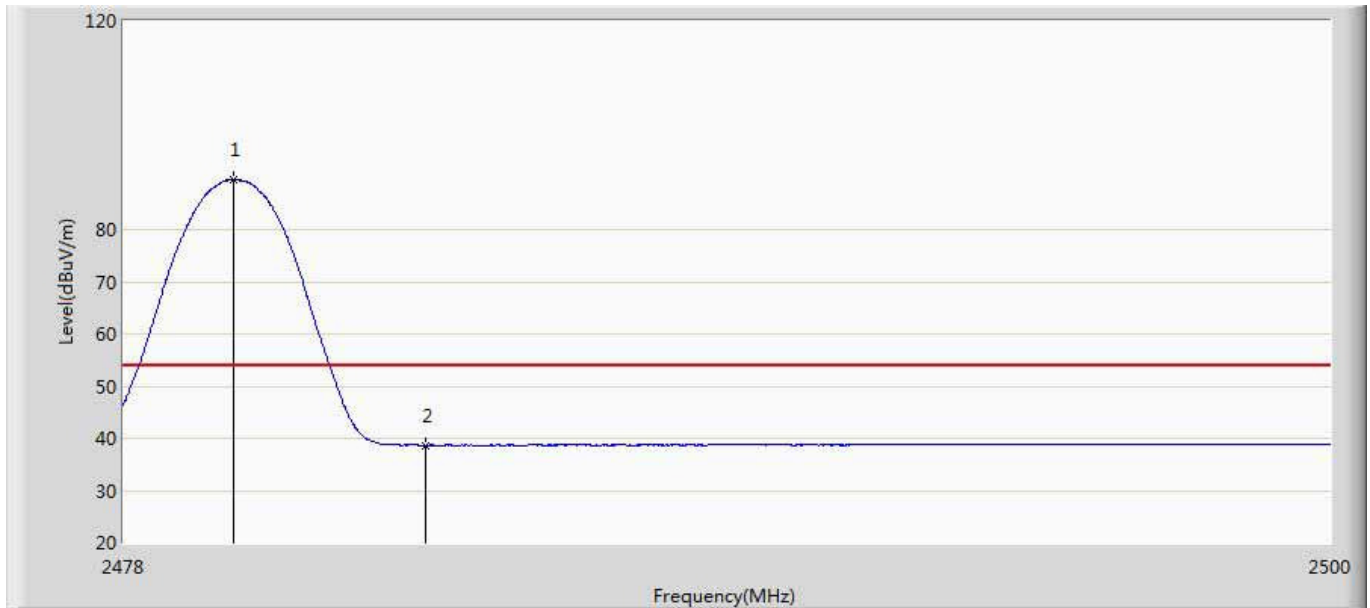

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.013	89.462	53.596	35.462	54.000	35.866	AV
2		2483.500	38.641	2.749	-15.359	54.000	35.891	AV


5. Fundamental emission output power

5.1. Test Equipment

Fundamental emission output power/ TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2016.01.04	2017.01.03
Spectrum Analyzer	Agilent	N9010A	MY48030494	2016.03.11	2017.03.10
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2015.11.11	2016.11.10
Power Sensor	Anritsu	MA2411B	0846014	2015.11.11	2016.11.10
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2016.04.10	2017.04.09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

5.2. Test Setup

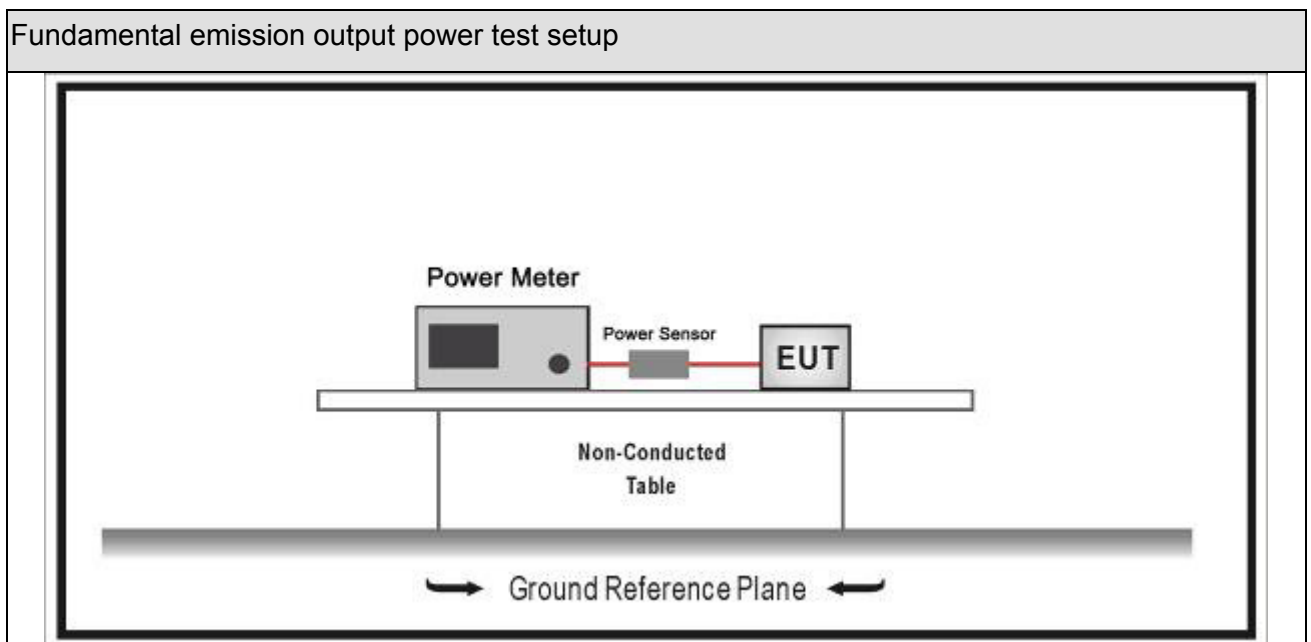

5.3. Limit




Fundamental emission output power Limit

☒ GTX

5.4. Test Procedure

Fundamental emission output power Test Method					
	References Rule			Chapter	Description
☒	ANSI C63.10			11.9	Fundamental emission output power
	☒	ANSI C63.10		11.9.1	Maximum peak conducted output power
		☐	ANSI C63.10	11.9.1.1	RBW ≥ DTS bandwidth
		☐	ANSI C63.10	11.9.1.2	Integrated band power method
		☒	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method
	☐	ANSI C63.10		11.9.2	Maximum conducted (average) output power
		☐	ANSI C63.10	11.9.2.2	Measurement using a spectrum analyzer (SA)
		☐	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle

5.5. EUT test definition

Item	Fundamental emission output power			
Device Category	☐	Fixed position use		
	☒	Mobile position use		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 1		
				
	☐	Chain 1	Chain 2	
				
		Worst Chain ☐	Worst Chain ☐	
	☐	Chain 1	Chain 2	Chain 3
				
		Worst Chain ☐	Worst Chain ☐	Worst Chain ☐

5.6. Test Result

Product Name	:	EZ-BLE PSoC Module	Test Power	:	AC120V
Test Site	:	TR8			

Mode	Channel	Test Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
1	00	2402	0.974	30	Pass
1	19	2440	0.874	30	Pass
1	39	2480	1.014	30	Pass

_____ The End _____