



## TEST REPORT

### PART 27 MEASUREMENT REPORT

**Applicant Name:**

Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**

11/07/2022 - 11/15/2022

**Test Site/Location:**

Element Lab., Suwon,  
Yongin-si, Gyeonggi-do, Korea

**Test Report Serial No.:**

8K22101901-00-R1.A3L

**FCC ID:**

**A3LRF4451D-70A**

**APPLICANT:**

**Samsung Electronics Co., Ltd.**

**Application Type:**

Class II Permissive Change

**Model:**

RF4451d-70A

**EUT Type:**

RRU(RF4451d)

**FCC Classification:**

Licensed Non-Broadcast Station Transmitter

**FCC Rule Part(s):**

§27

**Test Procedure(s):**

ANSI C63.26-2015, KDB 971168 D01 v03r01, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.



I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Prepared by Daniel Woo  
Test Engineer






Reviewed by Charles Shin  
Technical Manager

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 1 of 72

## T A B L E O F C O N T E N T S


1.0	REVISION RECORD .....	4
2.0	INTRODUCTION .....	5
2.1	Scope .....	5
2.2	Element Test Location.....	5
2.3	Test Facility / Accreditation .....	5
3.0	PRODUCT INFORMATION.....	6
3.1	Equipment Description .....	6
3.2	Device Capabilities.....	6
3.3	Test Configuration .....	7
3.4	EMI Suppression Device(s)/Modifications .....	7
4.0	DESCRIPTION OF TESTS .....	8
4.1	Measurement Procedure.....	8
4.2	Radiated Emissions.....	9
4.3	Measurement Software .....	9
5.0	MEASUREMENT UNCERTAINTY .....	10
6.0	TEST EQUIPMENT CALIBRATION DATA .....	11
7.0	SAMPLE CALCULATIONS .....	12
8.0	TEST RESULTS .....	13
8.1	Summary .....	13
8.2	Occupied Bandwidth .....	14
8.3	Equivalent Isotropic Radiated Power (Power Spectral Density) .....	18
8.4	Peak To Average Ratio .....	24
8.5	Band Edge Emissions at Antenna Terminal .....	28
8.6	Spurious and Harmonic Emissions at Antenna Terminal .....	34
8.7	Radiated spurious emission .....	56
9.0	CONCLUSION .....	68
10.0	APPENDIX. A .....	69
10.1	Conducted Average Output Power .....	69

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 2 of 72	



## MEASUREMENT REPORT

### FCC Part 27





Mode	Tx Frequency (MHz)	Total Conducted output power		Max Emission Designator	Modulation
		Max. Power (dBm)	Max. Power (W)		
NR_1C_10M	2110 to 2200	52.23	166.97	9M31G7D	QPSK
		52.28	169.00	9M31W7D	QAM
NR_2C_5M+5M		52.22	166.61	9M44G7D	QPSK
		52.24	167.34	9M47W7D	QAM
NR_2C_20M+20M		53.76	237.63	38M9G7D	QPSK
		53.82	241.19	39M0W7D	QAM

#### 5G NR n66 EUT Overview



#### **Notes:**

Total Power shown in the table above are the full conducted average output power that will appear on the Grant of Authorization.

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 3 of 72

## 1.0 REVISION RECORD

Issue Number	Issued Date	Revision History
8K22101901-00.A3L	11/15/2022	Initial Issue
8K22101901-00-R1.A3L	11/17/2022	Revision due to updated summary of test results table

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 4 of 72

## 2.0 INTRODUCTION

### 2.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.



### 2.2 Element Test Location

These measurement tests were conducted at the Element Materials Technology Suwon. Ltd. facility located at (#1407) 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do 16954, Korea.

### 2.3 Test Facility / Accreditation

**Measurements were performed at Element Materials Technology Suwon Lab located in Yongin-si, Gyeonggi, Korea.**

- Element Materials Technology Suwon is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
  - Designation Number / CABID: KR0169
  - Test Firm Registration Number of FCC: 417945
  - Test Firm Registration Number of IC: 26168

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 5 of 72	

## 3.0 PRODUCT INFORMATION

### 3.1 Equipment Description



The Equipment Under Test (EUT) is the **Samsung RRU(RF4451d) FCC ID: A3LRF4451D-70A**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

A class II permissive change on the original filing is being pursued to add channel Bandwidth without hardware modification.

### 3.2 Device Capabilities

This device supports the following conditional features and filter information:

EUT Type	RRU (RF4451d)		
Model Name	RF4451d-70A		
Test Device Serial No	S618618734		
Device Capabilities:	5G NR		
Operating Band/Frequency Range:	Band	Tx (Downlink)	Rx (Uplink)
	n66:	2110 MHz to 2200 MHz	1710 MHz to 1780 MHz
	n70:	1995 MHz to 2020 MHz	1695 MHz to 1710 MHz
Supported Modulation	QPSK, 16QAM, 64QAM, 256QAM		
n66 Supported Number of Carriers and Channel Bandwidth	NR: 5,10 and 20MHz bandwidth modes for 5G NR n66 with up to 2CC aggregated of Max. Bandwidth 40 MHz		
n70 Supported Number of Carriers and Channel Bandwidth	NR: 25MHz bandwidth 1CC mode for 5G NR n70		
Multi-band Carrier Aggregation Supported Number of Carriers and Channel Bandwidth	n66 and n70 with up to 3CC aggregated of Max. Bandwidth 65 MHz		
Maximum Output Power	n66	Total 240 W	
	n70	Total 160 W	
	Multi-band_n66 + n70	Total 320 W	
Number of Antenna ports	4TRX Configuration		
Supported Configurations	Single carrier, Multi-carrier, Multi-band		
Input Voltage:	-48 VDC		
Antenna:	Antenna is not provided by manufacture		

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 6 of 72	

### 3.3 Test Configuration

The setup is as follows:

- The EUT ("RRU(RF4451d)") and a Data Unit (DU) are each powered by -48V DC power supply.
- The DU is connected to a test laptop via an ethernet cable acting as backhaul.
- DU connects to the EUT through a fiber optic cable.
- An RF cable connects the signal analyzer and the EUT Ports for respective measurement.

The EUT was tested per the guidance of ANSI C63.26-2015 and KDB 971168 D01 v03r01. See Section 8.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

The following information is about configurations of carrier frequency and output power per port declared by the manufacturer.

\* Abbreviations:



- 1C: 1 carrier
- 2C: Contiguous 2 carriers in multi-carrier operation
- 2NC: Non-contiguous 2 carriers in multi-carrier operation

AWS n66 Single and Multi Carrier Configuration	No. of Carriers	Total Carrier Bandwidth (MHz)	Carrier Frequency Configuration (MHz)			Rated Power (W/path)
			Lowest	Middle	Highest	
NR_1C_10M	1	10	2115.0	2155.0	2195.0	40
NR_2C_5M+5M	2	10 (5+5)	2112.5 + 2117.5	2152.5 + 2157.5	2192.5 + 2197.5	40
NR_2NC_5M+5M			2112.5 + 2197.5			
NR_2C_20M+20M	2	40 (20+20)	2120.0 + 2140.0	2145.0 + 2165.0	2170.0 + 2190.0	60
NR_2NC_20M+20M			2120.0 + 2190.0			

Inter-Band Carrier Aggregation	No. of Carriers	Total Carrier Bandwidth (MHz)	Carrier Frequency Configuration (MHz)			Rated Power (W/path)
			Lowest	Middle	Highest	
NR n70_1C_25M+ n66_2C_20M+20M	3	65 (25+20+20)	2007.5 + 2120.0 + 2140.0	2007.5 + 2145.0 + 2165.0	2007.5 + 2170.0 + 2190.0	80

### 3.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 7 of 72	

## 4.0 DESCRIPTION OF TESTS

### 4.1 Measurement Procedure

The measurement procedures described in the document titled “American National Standard for Compliance Testing of Transmitter Used in Licensed Radio Service” (ANSI C63.26-2015) and the guidance provided in KDB 842590 D01 v01r01 were used in the measurement of the EUT.

Occupied Bandwidth:

KDB 971168 D01 v03r01 – Section 4.3  
ANSI C63.26-2015 – Section 5.4.4

Conducted Power Measurement and EIRP and PSD

KDB 971168 D01 v03r01 – Section 5.3  
KDB 971168 D01 v03r01 – Section 5.4  
KDB 662911 D01 v02r01 – Section E)1) In-Band Power Measurements  
ANSI C63.26-2015 – Section 5.2.5  
ANSI C63.26-2015 – Section 5.2.4

Peak-to-Average Power Ratio:

KDB 971168 D01 v03r01 – Section 5.7  
ANSI C63.26-2015 – Section 5.2.3.4

Channel Edge Emissions at Antenna Terminal

KDB 971168 D01 v03r01 – Section 6  
KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements  
a) Absolute Emission Limits  
iii) Measure and add  $10 \log(N_{ANT})$  dB  
ANSI C63.26-2015 – Section 5.7

Spurious and Harmonic Emissions at Antenna Terminal



KDB 971168 D01 v03r01 – Section 6  
KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements  
a) Absolute Emission Limits  
iii) Measure and add  $10 \log(N_{ANT})$  dB  
ANSI C63.26-2015 – Section 5.7

Radiated unwanted emission

KDB 971168 D01 v03r01 – Section 7  
ANSI C63.26-2015 – Section 5.8

Frequency Stability / Temperature Variation

KDB 971168 D01 v03r01 – Section 9  
ANSI C63.26-2015 – Section 5.6

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 8 of 72



## 4.2 Radiated Emissions



The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi- anechoic chamber which is shielded from any ambient interference.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. For frequencies above 1GHz, linearly polarized Vivaldi antennas were used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and Vivaldi antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the polarity of the receive antenna to produce the worst-case emissions

## 4.3 Measurement Software



Test item	Name	Version
Conducted Measurement	Node B automation	1.0

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 9 of 72	

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.37
Radiated Disturbance (<1GHz)	3.94
Radiated Disturbance (>1GHz)	4.75
Radiated Disturbance (>18GHz)	4.84

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 10 of 72	

## 6.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurement antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacture	Model	Description	Cal Date	Cal interval	Cal Due	Serial Number
Keysight	N9030B	PXA Signal Analyzer	09/05/2022	Annual	08/04/2023	MY57142018
Rohde & Schwarz	ESW	EMI Test Receiver	07/04/2022	Annual	07/03/2023	101761
AC POWER KOREA	ACPD-60150	DC Power Supply	01/18/2022	Annual	01/17/2023	DC-1
Rohde & Schwarz	TS-SFUNIT-Rx	Shielded Filter Unit	03/02/2022	Annual	03/01/2023	102131
Schwarzbeck	VULB9162	Broadband TRILOG Antenna	07/13/2021	Biennial	07/12/2023	9162-217
Sunol sciences	DRH-118	Horn Antenna	07/14/2021	Biennial	07/13/2023	A102416-1
Schwarzbeck	BBHA 9170	Horn Antenna	01/27/2022	Biennial	01/26/2024	1037
WAINWRIGHT	WHW-13000-18000-40000-40CC	High Pass Filter	05/09/2022	Annual	05/08/2023	2
Reachline	RL50W40GKF-20	Attenuator	07/05/2022	Annual	07/04/2023	PK00412
Reachline	250W18NN-40	Attenuator	10/17/2022	Annual	01/18/2023	PK00414
Reachline	250W18NN-40	Attenuator	10/17/2022	Annual	01/18/2023	PK00415
Reachline	250W18NN-40	Attenuator	10/17/2022	Annual	01/18/2023	PK00419
Reachline	250W18NN-40	Attenuator	10/17/2022	Annual	01/18/2023	PK00421
CentricRF	C411-20	Attenuator	05/09/2022	Annual	05/08/2023	0001
CentricRF	C411-20	Attenuator	01/09/2022	Annual	01/18/2023	0002
CentricRF	C411-20	Attenuator	01/09/2022	Annual	01/18/2023	0003
CentricRF	C411-20	Attenuator	01/09/2022	Annual	01/18/2023	0004

**Table 6-1. Test Equipment**

### Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- All testing was performed before the calibration due date.

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 11 of 72

## 7.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 9M31G7D**

Occupied Bandwidth = 9.31 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

#### QAM Modulation



**Emission Designator = 9M31W7D**

Occupied Bandwidth = 9.31 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 12 of 72

## 8.0 TEST RESULTS

### 8.1 Summary



Company Name: SAMSUNG Electronics Co., Ltd.  
 FCC ID: A3LRF4451D-70A  
 FCC Classification: Licensed Non-Broadcast Station Transmitter  
 Mode(s): 5G NR

FCC Part Section(s)	Test Description	Limit	Test Condition	Test Result	Reference
§ 2.1046	Conducted Average Output Power	N/A	CONDUCTED	PASS	Annex 1
§ 2.1049	Occupied Bandwidth	N/A		PASS	Section 8.2
§ 2.1046, § 27.50(d)	Equivalent Isotropic Radiated Power (Power Spectral Density)	≤ 1640 W/MHz		PASS	Section 8.3 (Note 4)
§ 2.1046, § 27.50(d)	Peak-to-average ratio	≤ 13 dB		PASS	Section 8.4
§ 2.1051, § 27.53(h)	Band Edge Emissions at Antenna Terminal	< 43 + log10(P[Watts]) at Band Edge and all out-of-band emissions		PASS	Section 8.5
§ 2.1051, § 27.53(h)	Spurious and Harmonic Emissions at Antenna Terminal			PASS	Section 8.6
§ 2.1055 § 27.54	Frequency Stability	Fundamental emissions stay within authorized frequency block		N/A	(Note 6)
§ 2.1055, § 27.53(h)	Radiated unwanted emission	< 43 + log10(P[Watts]) at Band Edge and all out-of-band emissions	RADIATED	PASS	Section 8.8

**Table 8-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) The maximum antenna gain is determined at the time of licensing depending on the geographical location of the base station.
- 5) Requirements of additional protection levels are addressed at the time of licensing by the Licensing Bureau. Therefore, requirement of additional protection level is not included during equipment certification.
- 6) This is a variant report for channel bandwidth and modulation enabled by software without hardware change. The test item does not affect those operation. And it was performed in original report.

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 13 of 72	

## 8.2 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 4.3

ANSI C63.26-2015 – Section 5.4.4


### Test Setting

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 8-1. Test Instrument & Measurement Setup**

### Test Notes

None



FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 14 of 72	

Channel	Port	OBW (MHz)			
		QPSK	16QAM	64QAM	256QAM
Low	0	9.29	9.23	9.28	<b>9.31</b>
	1	9.28	9.24	9.28	9.29
	2	9.29	9.23	9.28	9.30
	3	9.29	9.23	9.27	9.30
Middle	0	9.30	9.25	9.30	9.28
	1	9.28	9.24	9.28	9.30
	2	<b>9.31</b>	9.23	9.29	9.31
	3	9.30	9.24	9.28	9.28
High	0	9.29	9.24	9.27	9.30
	1	9.30	9.23	9.29	9.30
	2	9.29	9.24	9.27	9.30
	3	9.29	9.24	9.28	9.29

**Table 8-2. Occupied Bandwidth Summary Data (n66\_1C\_10M)**



Channel	Port	OBW (MHz)			
		QPSK	16QAM	64QAM	256QAM
Low	0	<b>9.44</b>	9.46	9.44	9.42
	1	9.42	<b>9.47</b>	9.43	9.44
	2	9.43	9.45	9.44	9.44
	3	9.42	9.45	9.42	9.45
Middle	0	9.42	9.46	9.42	9.44
	1	9.43	9.44	9.42	9.43
	2	9.43	9.46	9.43	9.45
	3	9.43	9.44	9.44	9.43
High	0	9.43	9.46	9.43	9.43
	1	9.44	9.46	9.46	9.43
	2	9.44	9.45	9.44	9.43
	3	9.44	9.45	9.45	9.44

**Table 8-3. Occupied Bandwidth Summary Data (n66\_2C\_5M+5M)**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)			<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 15 of 72	

Channel	Port	OBW (MHz)			
		QPSK	16QAM	64QAM	256QAM
Low	0	38.79	38.87	38.83	38.81
	1	38.82	38.87	38.78	38.80
	2	38.82	38.94	38.77	38.78
	3	38.79	38.92	38.82	38.80
Middle	0	38.84	38.94	38.81	38.83
	1	38.77	38.85	38.82	38.83
	2	38.87	38.93	38.81	38.82
	3	38.78	38.86	38.76	38.78
High	0	38.78	<b>38.97</b>	38.75	38.81
	1	38.81	38.85	38.75	38.85
	2	38.78	38.92	38.77	38.80
	3	<b>38.88</b>	38.91	38.86	38.79

**Table 8-4. Occupied Bandwidth Summary Data (n66\_2C\_20M+20M)**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 16 of 72	





Plot 8-1. Occupied Bandwidth Plot  
(n66 1C 10M QPSK - Mid Channel, Port 2)




Plot 8-2. Occupied Bandwidth Plot  
(n66 1C 10M 256QAM - Low Channel, Port 0)



Plot 8-3. Occupied Bandwidth Plot  
(n66 2C 5M+5M QPSK - Low Channel, Port 0)



Plot 8-4. Occupied Bandwidth Plot  
(n66 2C 5M+5M 16QAM - Low Channel, Port 1)

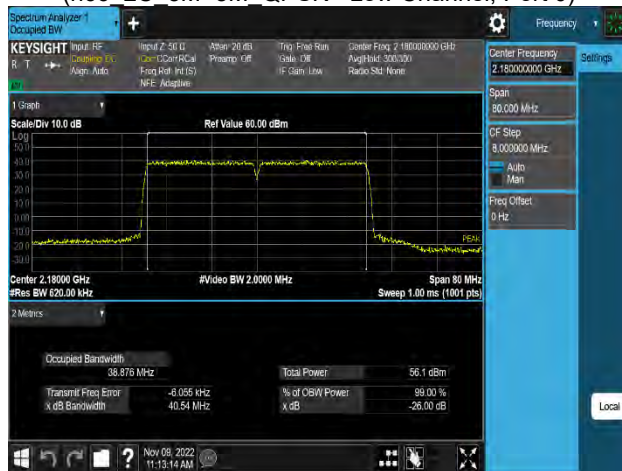

Plot 8-5. Occupied Bandwidth Plot  
(n66\_2C\_20M+20M\_QPSK - High Channel, Port 3)



Plot 8-6. Occupied Bandwidth Plot  
(n66\_2C\_20M+20M\_16QAM - High Channel, Port 0)

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 17 of 72

### 8.3 Equivalent Isotropic Radiated Power (Power Spectral Density)

#### Test Overview

A transmitter port of EUT is connected to the input of a signal analyzer. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

#### Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.2

KDB 662911 D01 v02r01 – Section E)1) In-Band Power Measurements

ANSI C63.26-2015 – Section 5.2.4


#### Test Setting

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:

1. Conducted average output power measurements are performed using the signal analyzer's "channel power mode" measurement capability for signals with continuous operation.
2. Set span to  $2 \times$  to  $3 \times$  the OBW.
3. Set RBW = 1 – 5% of the expected OBW
4. Set VBW  $\geq 3 \times$  RBW.
5. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
6. Sweep time: auto-couple
7. Detector = power averaging (rms).
8. Set sweep trigger to "free run."
9. The integration bandwidth was set equal to transmission bandwidth i.e. 20MHz for 2CC and 40MHz for 1CC measurements.
10. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.
11. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges.

#### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 8-2. Test Instrument & Measurement Setup**

#### Limit



N/A

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 18 of 72	

## Test Notes

1. Consider the following factors for MIMO:  
The output power per each port is measured as dBm/MHz or dBm, the output powers are summed up in linear using the measure-and-sum technique defined in KDB 971168 D01 v03r01 - Section E) 2).
2. The output power per port (dBm/MHz or dBm) is converted to a linear value (mW). A summation of linear powers for all ports gives us the total MIMO Conducted Power (mW). We convert this back to logarithmic scale for further output power calculations.
3. All transmit signals from different antennas are completely uncorrelated with each other. So the maximum output power shall be calculated based on the aggregate power conducted across all antennas.
4. Sample Calculation:  
Let us assume the following numbers:
  - a) Total MIMO Conducted Power as 24552.57 milliWatts
  - b)

	Factors	Value	Unit
Summed MIMO Conducted Power (linear sum)		24552.57	mW/MHz
Summed MIMO Conducted Power (dBm)	$= 10 * \log (24552.57) =$	43.90	dBm/MHz



FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 19 of 72	

Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
Low	0	37.15	38.04	37.20	37.17
	1	37.05	37.83	37.14	37.16
	2	37.07	37.71	37.06	37.13
	3	36.95	37.65	37.01	37.04
Total MIMO PSD Power (mW/MHz)		20299.68	24156.96	20519.75	20630.72
Total MIMO PSD Power (dBm/MHz)		43.07	43.83	43.12	43.15
Channel	Port	QPSK	16QAM	64QAM	256QAM
Middle	0	37.01	<b>38.03</b>	37.15	37.16
	1	36.95	<b>37.93</b>	37.05	37.10
	2	37.07	<b>37.88</b>	37.23	37.05
	3	36.91	<b>37.68</b>	36.89	36.80
Total MIMO PSD Power (mW/MHz)		19969.93	<b>24552.57</b>	20419.58	20189.35
Total MIMO PSD Power (dBm/MHz)		43.00	<b>43.90</b>	43.10	43.05
Channel	Port	QPSK	16QAM	64QAM	256QAM
High	0	37.08	37.74	37.06	37.03
	1	36.97	37.75	37.05	37.06
	2	37.14	37.82	37.13	37.18
	3	36.87	37.65	36.92	36.96
Total MIMO PSD Power (mW/MHz)		20124.74	23776.93	20229.03	20310.92
Total MIMO PSD Power (dBm/MHz)		43.04	43.76	43.06	43.08

**Table 8-5. Peak Power Spectral Density Table (n66\_1C\_10M)**



Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
Low	0	37.22	<b>37.54</b>	37.31	37.34
	1	37.28	<b>37.40</b>	37.24	37.26
	2	37.22	<b>37.42</b>	37.19	37.20
	3	37.08	<b>37.27</b>	37.28	37.24
Total MIMO PSD Power (mW/MHz)		20980.81	<b>22023.72</b>	21259.70	21286.99
Total MIMO PSD Power (dBm/MHz)		43.22	<b>43.43</b>	43.28	43.28
Channel	Port	QPSK	16QAM	64QAM	256QAM
Middle	0	37.21	37.43	37.17	37.27
	1	37.13	37.35	37.14	37.12
	2	37.15	37.45	37.18	37.15
	3	37.11	37.28	37.17	37.03
Total MIMO PSD Power (mW/MHz)		20755.22	21870.89	20829.90	20706.99
Total MIMO PSD Power (dBm/MHz)		43.17	43.40	43.19	43.16
Channel	Port	QPSK	16QAM	64QAM	256QAM
High	0	37.18	37.37	37.22	37.33
	1	37.18	37.41	37.21	37.16
	2	37.34	37.42	37.23	37.07
	3	37.16	37.30	36.99	37.09
Total MIMO PSD Power (mW/MHz)		21059.64	21859.31	20807.50	20815.27
Total MIMO PSD Power (dBm/MHz)		43.23	43.40	43.18	43.18

**Table 8-6. Peak Power Spectral Density Table (n66\_2C\_5M+5M)**

FCC ID: A3LRF4451D-70A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K22101901-00-R1.A3L	Test Dates: 11/07/2022 - 11/15/2022	EUT Type: RRU(RF4451d)	Page 20 of 72	

Channel	Port	PSD Power (dBm/MHz)			
		QPSK	16QAM	64QAM	256QAM
Low	0	32.60	34.19	32.63	32.78
	1	32.56	34.16	32.79	32.55
	2	32.44	34.15	32.52	32.60
	3	32.44	34.10	32.54	32.60
Total MIMO PSD Power (mW/MHz)		7124.76	10401.51	7315.81	7335.83
Total MIMO PSD Power (dBm/MHz)		38.53	40.17	38.64	38.65
Channel	Port	QPSK	16QAM	64QAM	256QAM
Middle	0	32.58	34.27	32.58	32.64
	1	32.47	34.13	32.58	32.54
	2	32.50	34.12	32.61	32.69
	3	32.24	33.94	32.39	32.34
Total MIMO PSD Power (mW/MHz)		7030.55	10327.43	7183.73	7198.46
Total MIMO PSD Power (dBm/MHz)		38.47	40.14	38.56	38.57
Channel	Port	QPSK	16QAM	64QAM	256QAM
High	0	32.49	<b>34.26</b>	32.53	32.52
	1	32.72	<b>34.32</b>	32.50	32.52
	2	32.67	<b>34.12</b>	32.59	32.54
	3	32.38	<b>33.96</b>	32.39	32.41
Total MIMO PSD Power (mW/MHz)		7225.19	<b>10444.50</b>	7119.04	7109.50
Total MIMO PSD Power (dBm/MHz)		38.59	<b>40.19</b>	38.52	38.52

**Table 8-7. Peak Power Spectral Density Table (n66\_2C\_20M+20M)**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 21 of 72	






Plot 8-7. Power Spectral Density Plot  
(n66\_1C\_10M\_16QAM - Mid Channel, Port 0)



Plot 8-8. Power Spectral Density Plot  
(n66\_1C\_10M\_16QAM - Mid Channel, Port 1)



Plot 8-9. Power Spectral Density Plot  
(n66\_1C\_10M\_16QAM - Mid Channel, Port 2)

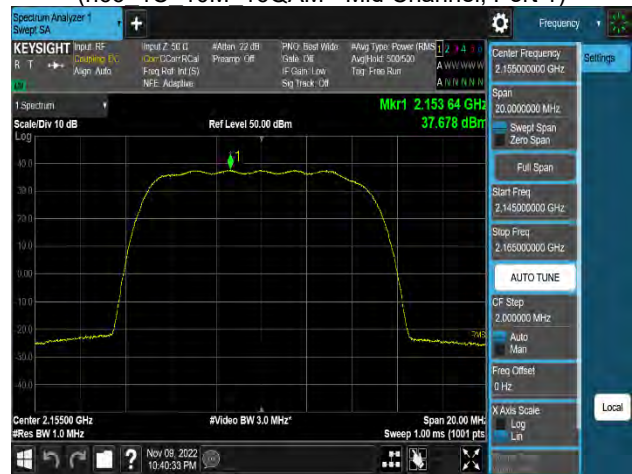

Plot 8-10. Power Spectral Density Plot  
(n66\_1C\_10M\_16QAM - Mid Channel, Port 3)



Plot 8-11. Power Spectral Density Plot  
(n66\_2C\_5M+5M\_16QAM - Low Channel, Port 0)



Plot 8-12. Power Spectral Density Plot  
(n66\_2C\_5M+5M\_16QAM - Low Channel, Port 1)

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 22 of 72




Plot 8-13. Power Spectral Density Plot  
(n66\_2C\_5M+5M\_16QAM - Low Channel, Port 2)



Plot 8-14. Power Spectral Density Plot  
(n66\_2C\_5M+5M\_16QAM - Low Channel, Port 3)



Plot 8-15. Power Spectral Density Plot  
(n66\_2C\_20M+20M\_16QAM - High Channel, Port 0)

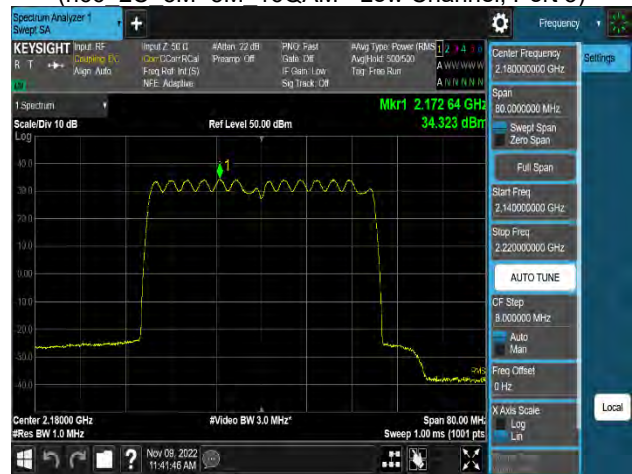

Plot 8-16. Power Spectral Density Plot  
(n66\_2C\_20M+20M\_16QAM - High Channel, Port 1)



Plot 8-17. Power Spectral Density Plot  
(n66\_2C\_20M+20M\_16QAM - High Channel, Port 2)



Plot 8-18. Power Spectral Density Plot  
(n66\_2C\_20M+20M\_16QAM - High Channel, Port 3)

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 23 of 72

## 8.4 Peak To Average Ratio

### Test Overview

The peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7

ANSI C63.26-2015 – Section 5.2.3.4


### Test Setting

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:

1. The signal analyzer's CCDF function is enabled.
2. Frequency = carrier center frequency
3. Measurement BW  $\geq$  OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 8-3. Test Instrument & Measurement Setup**

### Limit

The peak-to-average power ratio (PAPR) limit shall not exceed 13 dB for more than 0.1% of the time.

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 24 of 72	





Channel	Port	PAPR (dB)				Limit (dB)
		QPSK	16QAM	64QAM	256QAM	
Low	0	<b>8.41</b>	8.43	8.36	8.40	≤ 13
	1	8.39	8.40	8.33	8.38	
	2	8.39	8.42	8.35	8.39	
	3	8.40	8.42	8.36	8.38	
Middle	0	8.38	8.42	8.36	8.41	
	1	8.38	8.41	8.35	<b>8.44</b>	
	2	8.39	8.41	8.36	8.41	
	3	8.40	8.41	8.37	8.40	
High	0	8.39	8.39	8.35	8.42	
	1	8.36	8.41	8.38	8.40	
	2	8.39	8.43	8.36	8.42	
	3	8.41	8.41	8.37	8.42	

**Table 8-8. Peak To Average Power Ratio Summary Data (n66\_1C\_10M)**



Channel	Port	PAPR (dB)				Limit (dB)
		QPSK	16QAM	64QAM	256QAM	
Low	0	8.38	<b>8.49</b>	8.40	8.35	≤ 13
	1	8.38	8.43	8.38	8.37	
	2	8.36	8.45	8.39	8.36	
	3	8.37	8.42	8.39	8.36	
Middle	0	8.40	8.46	8.40	8.36	
	1	8.41	8.41	8.40	8.39	
	2	8.42	8.43	8.41	8.40	
	3	8.42	8.39	8.41	8.27	
High	0	8.40	8.43	8.40	8.39	
	1	8.40	8.43	8.40	8.38	
	2	<b>8.43</b>	8.40	8.44	8.40	
	3	8.41	8.45	8.40	8.36	

**Table 8-9. Peak To Average Power Ratio Summary Data (n66\_2C\_5M+5M)**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 25 of 72

Channel	Port	PAPR (dB)				Limit (dB)
		QPSK	16QAM	64QAM	256QAM	
Low	0	7.98	7.96	7.93	7.96	≤ 13
	1	7.97	7.96	7.95	7.96	
	2	7.98	7.95	7.96	7.96	
	3	7.98	7.97	7.96	7.98	
Middle	0	<b>8.01</b>	7.99	7.99	7.99	
	1	8.01	<b>8.00</b>	7.98	7.99	
	2	8.00	7.99	7.97	8.00	
	3	7.99	7.97	7.98	7.98	
High	0	7.96	7.95	7.96	7.95	
	1	7.94	7.95	7.93	7.95	
	2	7.98	7.98	7.97	7.97	
	3	7.97	7.95	7.95	7.95	

**Table 8-10. Peak To Average Power Ratio Summary Data (n66\_2C\_20M+20M)**


FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)			<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)			Page 26 of 72



Plot 8-19. Peak To Average Power Ratio Plot  
(n66\_1C\_10M\_QPSK - Low Channel, Port 0)




Plot 8-20. Peak To Average Power Ratio Plot  
(n66\_1C\_10M\_256QAM - Mid Channel, Port 1)

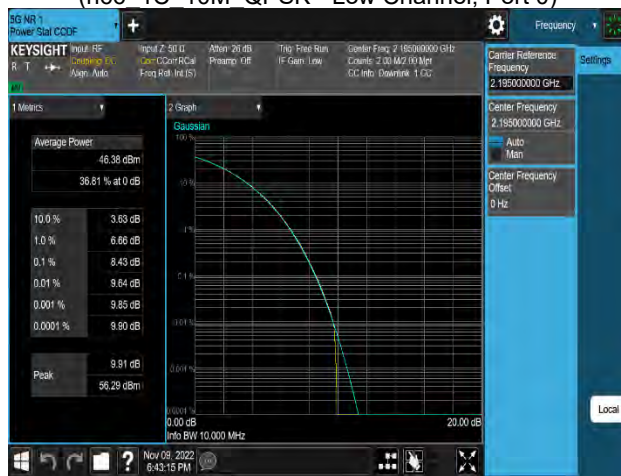

Plot 8-21. Peak To Average Power Ratio Plot  
(n66\_2C\_5M+5M\_QPSK - High Channel, Port 2)



Plot 8-22. Peak To Average Power Ratio Plot  
(n66\_2C\_5M+5M\_16QAM - Low Channel, Port 0)

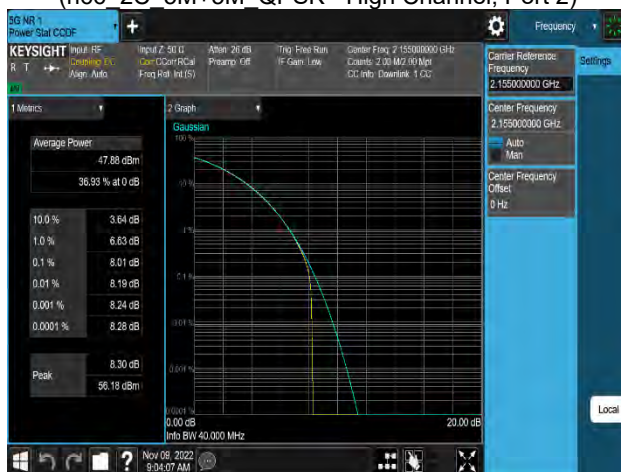

Plot 8-23. Peak To Average Power Ratio Plot  
(n66\_2C\_20M+20M\_QPSK - Mid Channel, Port 0)



Plot 8-24. Peak To Average Power Ratio Plot  
(n66\_2C\_20M+20M\_16QAM - Mid Channel, Port 1)

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 27 of 72

## 8.5 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6

KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements

a) Absolute Emission Limits

iii) Measure and add  $10 \log(N_{ANT})$  dB

ANSI C63.26-2015 – Section 5.7.3

### Test Setting


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW: Please see test notes below.
4. VBW  $\geq 3 \times$  RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times$  Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Limit



The power of any emission outside of the authorized operating frequency range cannot exceed -13 dBm.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





**Figure 8-4. Test Instrument & Measurement Setup**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 28 of 72	

## Test Notes

1. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
2. When the channel edge detect with a margin of under 1dB to Limit, That used to integration method was performed using the spectrum analyzer's band power functions according to ANSI C63.26-2015 – Section 5.7. The spectrum analyzer marker was placed at one-half of the RBW away from the band edge. The integration value was set to a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter.
3. The limits were adjusted by a factor of  $[-10 \cdot \log(4)]$  dB to account for the device operation as a 4 port MIMO transmitter, as per FCC KDB 622911. MIMO Factor calculation as below:  
MIMO Factor =  $10 \cdot \log(4) = 6.02$  dB

Frequency range	Basic Limit (dBm/MHz)	4Tx MIMO Factor (dB)	RBW Factor (dB)	Adjusted limit (dBm)
Low Frequency block – 1MHz	-13	6.02	0	-19.02
High Frequency block + 1MHz	-13	6.02	0	-19.02
Note: Adjusted limit (dBm/MHz) = Basic limit (dBm/1MHz) - MIMO Factor - RBW Factor				

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 29 of 72	

Channel	Port	Measured Range (MHz)	Max. Value (dBm)				Limit (dBm)
			QPSK	16QAM	64QAM	256QAM	
Low	0	2109 to 2110	-23.37	-23.59	-23.34	-23.16	-19.02
	1	2109 to 2110	-24.73	-24.57	-23.79	-23.13	
	2	2109 to 2110	-23.66	-23.56	-24.00	-23.32	
	3	2109 to 2110	-23.93	<b>-23.04</b>	-24.63	-23.92	
High	0	2200 to 2201	-23.67	-24.98	-23.74	<b>-22.63</b>	
	1	2200 to 2201	-25.23	-27.05	-23.60	-23.96	
	2	2200 to 2201	-24.36	-25.24	-23.62	-23.76	
	3	2200 to 2201	-23.86	-26.89	-24.04	-24.21	



**Table 8-11. Band Edge Emission Summary Data (n66\_1C\_10M)**

Channel	Port	Measured Range (MHz)	Max. Value (dBm)				Limit (dBm)
			QPSK	16QAM	64QAM	256QAM	
Low	0	2109 to 2110	<b>-21.29</b>	-23.54	-23.19	-24.74	-19.02
	1	2109 to 2110	-25.33	-25.39	-24.95	-24.69	
	2	2109 to 2110	-24.94	-24.66	-24.11	-24.35	
	3	2109 to 2110	-25.03	-24.62	-24.66	-25.00	
High	0	2200 to 2201	-23.54	-23.85	-24.54	-23.83	
	1	2200 to 2201	-24.90	-25.49	-25.43	-25.98	
	2	2200 to 2201	-25.82	-23.93	-25.42	-24.86	
	3	2200 to 2201	-23.89	-25.17	-25.89	<b>-23.26</b>	

**Table 8-12. Band Edge Emission Summary Data (n66\_2C\_5M+5M)**

Channel	Port	Measured Range (MHz)	Max. Value (dBm)				Limit (dBm)
			QPSK	16QAM	64QAM	256QAM	
Low	0	2109 to 2110	-23.99	<b>-22.95</b>	-23.40	-23.37	-19.02
	1	2109 to 2110	-23.31	-23.54	-23.35	-23.27	
	2	2109 to 2110	-23.33	-23.69	-23.72	-23.92	
	3	2109 to 2110	-23.95	-23.37	-24.52	-23.71	
High	0	2200 to 2201	-24.38	-25.21	-24.38	-24.42	
	1	2200 to 2201	-24.58	-24.68	-24.60	-24.59	
	2	2200 to 2201	-23.89	-24.81	<b>-23.70</b>	-23.90	
	3	2200 to 2201	-24.62	-24.60	-24.90	-24.71	



**Table 8-13. Band Edge Emission Summary Data (n66\_2C\_20M+20M)**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 8K22101901-00-R1.A3L	Test Dates: 11/07/2022 - 11/15/2022	EUT Type: RRU(RF4451d)		Page 30 of 72	



Mode	Channel	Port	Measured Range (MHz)	Max. Value (dBm)	Limit (dBm)
				QPSK	
n66_2NC 5M+5M	Low	0	2109 to 2110	-25.64	-19.02
		1	2109 to 2110	-26.03	
		2	2109 to 2110	<b>-25.06</b>	
		3	2109 to 2110	-25.44	
	High	0	2200 to 2201	-25.87	
		1	2200 to 2201	-26.87	
		2	2200 to 2201	-26.46	
		3	2200 to 2201	<b>-25.74</b>	
n66_2NC 20M+20M	Low	0	2109 to 2110	<b>-23.96</b>	-19.02
		1	2109 to 2110	-25.16	
		2	2109 to 2110	-24.51	
		3	2109 to 2110	-25.33	
	High	0	2200 to 2201	-23.91	
		1	2200 to 2201	-24.40	
		2	2200 to 2201	<b>-23.74</b>	
		3	2200 to 2201	-23.86	

**Table 8-14. Band Edge Emission Summary Data (n66\_ Multi-Carrier\_Non-contiguous)**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 31 of 72	



Plot 8-25. Band Edge Emission Plot  
(n66 1C 10M 16QAM - Low Channel, Port 3)



Plot 8-26. Band Edge Emission Plot  
(n66 1C 10M 256QAM - High Channel, Port 0)



Plot 8-27. Band Edge Emission Plot  
(n66 2C 5M+5M QPSK - Low Channel, Port 0)



Plot 8-28. Band Edge Emission Plot  
(n66 2C 5M+5M 256QAM - High Channel, Port 3)



Plot 8-29. Band Edge Emission Plot  
(n66 2C 20M+20M 16QAM - Low Channel, Port 0)



Plot 8-30. Band Edge Emission Plot  
(n66 2C 20M+20M 64QAM - High Channel, Port 2)

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 32 of 72





Plot 8-31. Band Edge Emission Plot  
(n66\_2NC\_5M+5M\_QPSK - Low Channel, Port 2)





Plot 8-32. Band Edge Emission Plot  
(n66\_2NC\_5M+5M\_QPSK - High Channel, Port 3)



Plot 8-33. Band Edge Emission Plot  
(n66\_2NC\_20M+20M\_QPSK - Low Channel, Port 0)



Plot 8-34. Band Edge Emission Plot  
(n66\_2NC\_20M+20M\_QPSK - High Channel, Port 2)

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 33 of 72

## 8.6 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6

KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements

a) Absolute Emission Limits

iii) Measure and add  $10 \log(N_{ANT})$  dB



ANSI C63.26-2015 – Section 5.7

### Test Setting

1. Start frequency was set to 9 kHz and stop frequency was set to at least  $10 \times$  the fundamental frequency excluding the frequency range of the band edge measurement.
2. RBW: Please see test notes below.
3. VBW  $\geq 3 \times$  RBW
4. Detector = RMS
5. Number of sweep points  $\geq 2 \times$  Span/RBW
6. Trace mode = trace average
7. Sweep time = auto couple
8. The trace was allowed to stabilize


### Limit

The power of any emission outside of the authorized operating frequency range cannot exceed -13 dBm.

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 34 of 72	

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





**Figure 8-5. Test Instrument & Measurement Setup**



## Test Notes

- Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- All modes of operation were investigated and the worst configuration result plots are reported in each operating frequency band.
- The limits were adjusted by a factor of  $[-10 \cdot \log(4)]$  dB to account for the device operation as a 4 port MIMO transmitter, as per FCC KDB 622911. MIMO Factor calculation as below:  
MIMO Factor =  $10 \cdot \log(4) = 6.02$  dB
- Narrower RBW parameter is applied according to Section 5.7 of ANSI C63.26-2015 for some edge channels due to improving measurement accuracy. RBW Factor calculation as below:
  - RBW Factor =  $10 \cdot \log(1/0.001) = 30$  dB
  - RBW Factor =  $10 \cdot \log(1/0.01) = 20$  dB
  - RBW Factor =  $10 \cdot \log(1/0.1) = 10$  dB



Frequency range	Basic Limit (dBm/MHz)	MIMO Factor (dB)	References RBW (MHz)	Measurement RBW (kHz)	RBW Factor (dB)	Adjusted limit (dBm)
9 kHz to 150 kHz	-13.00	6.02	1	0.001	30	-49.02
150 kHz to 30 MHz				0.01	20	-39.02
30 MHz to 2 GHz				1	0	-19.02
2 GHz to 2.108 GHz				0.1	10	-29.02
2.108 GHz to 2.109 GHz				1	0	-19.02
2.201 GHz to 2.202 GHz				1	0	-19.02
2.202 GHz to 3 GHz				0.1	10	-29.02
3 GHz to 22 GHz				1	0	-19.02
Note: Adjusted limit (dBm/MHz) = Basic limit (dBm/1MHz) - MIMO Factor - RBW Factor						

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 8K22101901-00-R1.A3L	Test Dates: 11/07/2022 - 11/15/2022	EUT Type: RRU(RF4451d)		Page 35 of 72	

Channel	Port	Measurement Range	Level (dBm)				Limit (dBm)	Margin (dB)
			QPSK	16QAM	64QAM	256QAM		
Low	0	9 kHz to 150 kHz	-72.42	-70.54	-72.12	-71.23	-49.02	-21.52
		150 kHz to 30 MHz	-58.05	-58.81	-57.99	-59.08	-39.02	-18.97
		30 MHz to 2 GHz	-43.83	-44.13	-43.44	-42.56	-19.02	-23.54
		2 GHz to 2.108 GHz	-32.53	-31.66	-32.61	-30.31	-29.02	-1.29
		2.108 GHz to 2.109 GHz	-21.74	-20.96	-20.18	-21.66	-19.02	-1.16
		2.201 GHz to 2.202 GHz	-30.70	-30.05	-29.45	-29.59	-19.02	-10.43
		2.202 GHz to 3 GHz	-39.16	-39.10	-38.51	-37.93	-29.02	-8.91
		3 GHz to 10 GHz	-27.22	-27.78	-27.97	-28.34	-19.02	-8.20
		10 GHz to 18 GHz	-24.76	-23.77	-24.53	-25.33	-19.02	-4.75
		18 GHz to 22 GHz	-29.49	-29.03	-29.06	-29.50	-19.02	-10.01
	1	9 kHz to 150 kHz	-71.97	-71.66	-72.49	-72.60	-49.02	-22.64
		150 kHz to 30 MHz	-57.57	-59.42	-57.28	-58.91	-39.02	-18.26
		30 MHz to 2 GHz	-43.41	-43.41	-43.16	-43.52	-19.02	-24.14
		2 GHz to 2.108 GHz	-33.16	-32.54	-32.64	-32.31	-29.02	-3.29
		2.108 GHz to 2.109 GHz	-21.64	-22.63	-22.77	-22.46	-19.02	-2.62
		2.201 GHz to 2.202 GHz	-28.97	-30.84	-30.45	-29.84	-19.02	-9.95
		2.202 GHz to 3 GHz	-38.20	-38.86	-38.99	-39.26	-29.02	-9.18
		3 GHz to 10 GHz	-27.66	-28.47	-27.96	-28.49	-19.02	-8.64
		10 GHz to 18 GHz	-26.53	-25.17	-25.79	-24.99	-19.02	-5.97
		18 GHz to 22 GHz	-29.39	-30.14	-29.38	-30.03	-19.02	-10.36
	2	9 kHz to 150 kHz	-72.40	-71.73	-72.30	-72.34	-49.02	-22.71
		150 kHz to 30 MHz	-58.29	-59.03	-58.22	-58.34	-39.02	-19.20
		30 MHz to 2 GHz	-42.19	-43.45	-42.52	-44.01	-19.02	-23.17
		2 GHz to 2.108 GHz	-31.28	-31.37	-31.31	-30.51	-29.02	-1.49
		2.108 GHz to 2.109 GHz	-20.57	-20.77	-21.64	-21.05	-19.02	-1.55
		2.201 GHz to 2.202 GHz	-29.28	-29.32	-29.28	-29.43	-19.02	-10.26
		2.202 GHz to 3 GHz	-38.17	-38.34	-38.06	-38.39	-29.02	-9.04
		3 GHz to 10 GHz	-27.56	-27.46	-27.08	-27.06	-19.02	-8.04
		10 GHz to 18 GHz	-26.69	-24.81	-25.03	-24.50	-19.02	-5.48
		18 GHz to 22 GHz	-29.11	-28.91	-29.62	-29.49	-19.02	-9.89
	3	9 kHz to 150 kHz	-72.54	-71.15	-72.32	-72.38	-49.02	-22.13
		150 kHz to 30 MHz	-58.48	-59.08	-57.99	-58.38	-39.02	-18.97
		30 MHz to 2 GHz	-43.09	-43.55	-43.84	-43.67	-19.02	-24.07
		2 GHz to 2.108 GHz	-31.89	-31.80	-31.59	-31.21	-29.02	-2.19
		2.108 GHz to 2.109 GHz	-22.01	-22.04	-21.47	-22.03	-19.02	-2.45
		2.201 GHz to 2.202 GHz	-30.41	-30.35	-29.57	-30.30	-19.02	-10.55
		2.202 GHz to 3 GHz	-38.59	-38.07	-38.86	-38.73	-29.02	-9.05
		3 GHz to 10 GHz	-28.37	-27.83	-28.55	-27.30	-19.02	-8.28
		10 GHz to 18 GHz	-26.26	-27.22	-27.46	-27.03	-19.02	-7.24
		18 GHz to 22 GHz	-29.06	-29.07	-29.02	-29.30	-19.02	-10.00

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 8K22101901-00-R1.A3L	Test Dates: 11/07/2022 - 11/15/2022	EUT Type: RRU(RF4451d)		Page 36 of 72	



Middle	0	9 kHz to 150 kHz	-72.28	-71.70	-72.40	-72.13	-49.02	-22.68
		150 kHz to 30 MHz	-58.38	-57.46	-57.97	-59.24	-39.02	-18.44
		30 MHz to 2 GHz	-43.39	-43.67	-43.15	-43.60	-19.02	-24.13
		2 GHz to 2.108 GHz	-36.52	-37.34	-36.23	-37.99	-29.02	-7.21
		2.108 GHz to 2.109 GHz	-27.89	-28.81	-27.55	-27.22	-19.02	-8.20
		2.201 GHz to 2.202 GHz	-28.51	-29.71	-27.98	-28.16	-19.02	-8.96
		2.202 GHz to 3 GHz	-37.13	-38.48	-37.45	-37.35	-29.02	-8.11
		3 GHz to 10 GHz	-26.91	-27.37	-27.36	-27.68	-19.02	-7.89
		10 GHz to 18 GHz	-25.38	-24.88	-25.00	-24.66	-19.02	-5.64
		18 GHz to 22 GHz	-30.39	-28.93	-29.35	-29.70	-19.02	-9.91
	1	9 kHz to 150 kHz	-72.90	-72.56	-72.60	-72.14	-49.02	-23.12
		150 kHz to 30 MHz	-57.93	-57.91	-58.94	-58.12	-39.02	-18.89
		30 MHz to 2 GHz	-43.53	-44.95	-42.80	-43.91	-19.02	-23.78
		2 GHz to 2.108 GHz	-37.54	-37.98	-37.67	-39.92	-29.02	-8.52
		2.108 GHz to 2.109 GHz	-30.95	-29.22	-31.26	-30.04	-19.02	-10.20
		2.201 GHz to 2.202 GHz	-29.90	-28.65	-29.68	-30.98	-19.02	-9.63
		2.202 GHz to 3 GHz	-38.24	-39.83	-38.36	-37.28	-29.02	-8.26
		3 GHz to 10 GHz	-27.80	-28.00	-27.57	-28.41	-19.02	-8.55
		10 GHz to 18 GHz	-26.04	-25.66	-24.18	-26.58	-19.02	-5.16
		18 GHz to 22 GHz	-29.87	-29.46	-29.06	-29.96	-19.02	-10.04
	2	9 kHz to 150 kHz	-72.56	-72.89	-72.46	-72.11	-49.02	-23.09
		150 kHz to 30 MHz	-58.72	-58.93	-59.54	-58.27	-39.02	-19.25
		30 MHz to 2 GHz	-42.81	-43.06	-43.95	-42.59	-19.02	-23.57
		2 GHz to 2.108 GHz	-36.85	-36.37	-37.01	-36.83	-29.02	-7.35
		2.108 GHz to 2.109 GHz	-28.95	-28.27	-27.54	-28.26	-19.02	-8.52
		2.201 GHz to 2.202 GHz	-28.87	-29.66	-28.05	-29.77	-19.02	-9.03
		2.202 GHz to 3 GHz	-38.51	-36.62	-37.19	-38.45	-29.02	-7.60
		3 GHz to 10 GHz	-27.74	-27.35	-27.26	-26.82	-19.02	-7.80
		10 GHz to 18 GHz	-25.14	-23.81	-24.62	-25.22	-19.02	-4.79
		18 GHz to 22 GHz	-28.93	-28.23	-29.84	-29.50	-19.02	-9.21
	3	9 kHz to 150 kHz	-72.27	-72.60	-72.91	-73.02	-49.02	-23.25
		150 kHz to 30 MHz	-59.57	-57.45	-57.70	-57.76	-39.02	-18.43
		30 MHz to 2 GHz	-43.87	-43.96	-43.40	-43.07	-19.02	-24.05
		2 GHz to 2.108 GHz	-36.64	-36.99	-38.20	-37.81	-29.02	-7.62
		2.108 GHz to 2.109 GHz	-27.41	-29.77	-26.42	-28.43	-19.02	-7.40
		2.201 GHz to 2.202 GHz	-28.10	-28.12	-28.64	-30.05	-19.02	-9.08
		2.202 GHz to 3 GHz	-37.51	-37.86	-36.74	-38.72	-29.02	-7.72
		3 GHz to 10 GHz	-26.93	-28.32	-28.22	-27.98	-19.02	-7.91
		10 GHz to 18 GHz	-26.86	-26.79	-26.73	-27.55	-19.02	-7.71
		18 GHz to 22 GHz	-29.68	-28.92	-30.42	-29.99	-19.02	-9.90

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)			<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 37 of 72	





High	0	9 kHz to 150 kHz	-73.24	-72.98	-72.50	-72.15	-49.02	-23.13
		150 kHz to 30 MHz	-57.46	-57.26	-58.44	-58.78	-39.02	-18.24
		30 MHz to 2 GHz	-42.75	-43.33	-43.29	-43.64	-19.02	-23.73
		2 GHz to 2.108 GHz	-37.18	-36.86	-36.91	-37.23	-29.02	-7.84
		2.108 GHz to 2.109 GHz	-28.61	-28.29	-28.76	-28.69	-19.02	-9.27
		2.201 GHz to 2.202 GHz	-22.49	-20.92	-23.66	-20.28	-19.02	-1.26
		2.202 GHz to 3 GHz	-30.62	-30.59	-33.85	-30.20	-29.02	-1.18
		3 GHz to 10 GHz	-27.22	-26.72	-25.67	-27.05	-19.02	-6.65
		10 GHz to 18 GHz	-25.39	-25.49	-25.63	-24.78	-19.02	-5.76
		18 GHz to 22 GHz	-29.28	-29.87	-28.34	-29.55	-19.02	-9.32
	1	9 kHz to 150 kHz	-73.73	-72.84	-73.14	-73.95	-49.02	-23.82
		150 kHz to 30 MHz	-59.38	-59.09	-58.97	-59.03	-39.02	-19.95
		30 MHz to 2 GHz	-44.67	-43.27	-43.69	-43.97	-19.02	-24.25
		2 GHz to 2.108 GHz	-38.95	-39.20	-38.50	-39.40	-29.02	-9.48
		2.108 GHz to 2.109 GHz	-30.73	-30.18	-30.90	-30.37	-19.02	-11.16
		2.201 GHz to 2.202 GHz	-20.17	-22.64	-21.73	-20.97	-19.02	-1.15
		2.202 GHz to 3 GHz	-35.81	-31.83	-31.25	-30.86	-29.02	-1.84
		3 GHz to 10 GHz	-27.29	-27.17	-27.92	-28.28	-19.02	-8.15
		10 GHz to 18 GHz	-26.57	-25.78	-26.35	-24.83	-19.02	-5.81
		18 GHz to 22 GHz	-28.68	-29.01	-28.69	-29.58	-19.02	-9.66
	2	9 kHz to 150 kHz	-73.56	<b>-72.42</b>	-73.01	-72.47	-49.02	-23.40
		150 kHz to 30 MHz	-57.45	<b>-58.30</b>	-59.90	-59.02	-39.02	-18.43
		30 MHz to 2 GHz	-43.14	<b>-43.31</b>	-44.01	-43.59	-19.02	-24.12
		2 GHz to 2.108 GHz	-37.37	<b>-37.27</b>	-37.98	-37.48	-29.02	-8.25
		2.108 GHz to 2.109 GHz	-28.90	<b>-28.91</b>	-28.83	-28.88	-19.02	-9.81
		2.201 GHz to 2.202 GHz	-22.66	<b>-20.12</b>	-24.76	-20.91	-19.02	<b>-1.10</b>
		2.202 GHz to 3 GHz	-35.48	<b>-30.55</b>	-31.37	-31.09	-29.02	-1.53
		3 GHz to 10 GHz	-27.26	<b>-26.74</b>	-27.23	-27.15	-19.02	-7.72
		10 GHz to 18 GHz	-25.02	<b>-24.99</b>	-22.71	-24.84	-19.02	-3.69
		18 GHz to 22 GHz	-28.79	<b>-29.52</b>	-29.00	-29.57	-19.02	-9.77
	3	9 kHz to 150 kHz	-73.46	-72.70	-73.41	-73.44	-49.02	-23.68
		150 kHz to 30 MHz	-59.44	-57.62	-57.89	-57.49	-39.02	-18.47
		30 MHz to 2 GHz	-43.84	-43.75	-43.25	-42.52	-19.02	-23.50
		2 GHz to 2.108 GHz	-37.67	-37.35	-37.68	-37.35	-29.02	-8.33
		2.108 GHz to 2.109 GHz	-29.20	-28.60	-28.86	-29.05	-19.02	-9.58
		2.201 GHz to 2.202 GHz	-21.33	-22.30	-24.53	-21.02	-19.02	-2.00
		2.202 GHz to 3 GHz	-30.55	-33.78	-32.58	-31.68	-29.02	-1.53
		3 GHz to 10 GHz	-27.10	-27.87	-27.93	-27.60	-19.02	-8.08
		10 GHz to 18 GHz	-26.45	-27.49	-26.82	-27.07	-19.02	-7.43
		18 GHz to 22 GHz	-29.14	-28.79	-29.30	-28.52	-19.02	-9.50



**Table 8-15. Conducted Spurious Emission Summary Data (n66\_1C\_10M)**

FCC ID: A3LRF4451D-70A			<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 38 of 72		

Channel	Port	Measurement Range	Level (dBm)				Limit (dBm)	Margin (dB)
			QPSK	16QAM	64QAM	256QAM		
Low	0	9 kHz to 150 kHz	-72.90	-72.39	-72.45	<b>-72.56</b>	-49.02	-23.37
		150 kHz to 30 MHz	-58.37	-58.39	-57.92	<b>-58.00</b>	-39.02	-18.90
		30 MHz to 2 GHz	-43.22	-42.92	-44.05	<b>-42.39</b>	-19.02	-23.37
		2 GHz to 2.108 GHz	-30.29	-32.03	-31.62	<b>-30.06</b>	-29.02	<b>-1.04</b>
		2.108 GHz to 2.109 GHz	-22.37	-21.66	-22.36	<b>-20.28</b>	-19.02	-1.26
		2.201 GHz to 2.202 GHz	-29.33	-30.37	-29.98	<b>-30.33</b>	-19.02	-10.31
		2.202 GHz to 3 GHz	-38.74	-37.40	-39.11	<b>-37.95</b>	-29.02	-8.38
		3 GHz to 10 GHz	-27.02	-27.66	-27.82	<b>-27.65</b>	-19.02	-8.00
		10 GHz to 18 GHz	-24.96	-24.57	-24.88	<b>-24.16</b>	-19.02	-5.14
		18 GHz to 22 GHz	-29.09	-28.97	-29.12	<b>-29.78</b>	-19.02	-9.95
	1	9 kHz to 150 kHz	-73.00	-72.85	-72.82	-72.37	-49.02	-23.35
		150 kHz to 30 MHz	-58.06	-59.04	-57.03	-57.99	-39.02	-18.01
		30 MHz to 2 GHz	-43.64	-44.44	-42.32	-43.71	-19.02	-23.30
		2 GHz to 2.108 GHz	-33.93	-33.67	-30.67	-33.22	-29.02	-1.65
		2.108 GHz to 2.109 GHz	-21.39	-23.18	-22.77	-23.30	-19.02	-2.37
		2.201 GHz to 2.202 GHz	-30.13	-30.42	-30.48	-30.23	-19.02	-11.11
		2.202 GHz to 3 GHz	-37.83	-39.08	-39.03	-39.67	-29.02	-8.81
		3 GHz to 10 GHz	-27.86	-28.76	-26.13	-27.02	-19.02	-7.11
		10 GHz to 18 GHz	-26.91	-25.82	-25.96	-26.05	-19.02	-6.80
		18 GHz to 22 GHz	-29.23	-28.83	-28.80	-28.99	-19.02	-9.78
	2	9 kHz to 150 kHz	-72.86	-72.61	-73.36	-73.09	-49.02	-23.59
		150 kHz to 30 MHz	-57.73	-57.66	-58.89	-58.47	-39.02	-18.64
		30 MHz to 2 GHz	-44.06	-43.79	-43.38	-43.50	-19.02	-24.36
		2 GHz to 2.108 GHz	-33.30	-32.36	-33.43	-32.83	-29.02	-3.34
		2.108 GHz to 2.109 GHz	-22.69	-22.67	-22.84	-22.28	-19.02	-3.26
		2.201 GHz to 2.202 GHz	-29.40	-29.31	-29.35	-29.34	-19.02	-10.29
		2.202 GHz to 3 GHz	-36.18	-37.15	-36.66	-37.66	-29.02	-7.16
		3 GHz to 10 GHz	-27.68	-27.88	-27.01	-27.09	-19.02	-7.99
		10 GHz to 18 GHz	-23.45	-24.89	-25.27	-25.49	-19.02	-4.43
		18 GHz to 22 GHz	-29.40	-29.87	-29.04	-29.53	-19.02	-10.02
	3	9 kHz to 150 kHz	-71.89	-72.00	-72.74	-73.27	-49.02	-22.87
		150 kHz to 30 MHz	-58.15	-58.83	-58.75	-57.96	-39.02	-18.94
		30 MHz to 2 GHz	-43.50	-44.34	-44.19	-43.55	-19.02	-24.48
		2 GHz to 2.108 GHz	-30.45	-33.14	-33.12	-33.43	-29.02	-1.43
		2.108 GHz to 2.109 GHz	-23.04	-20.50	-20.92	-22.74	-19.02	-1.48
		2.201 GHz to 2.202 GHz	-30.15	-30.26	-30.21	-30.20	-19.02	-11.13
		2.202 GHz to 3 GHz	-38.60	-38.00	-39.17	-39.45	-29.02	-8.98
		3 GHz to 10 GHz	-27.45	-28.58	-27.69	-27.40	-19.02	-8.38
		10 GHz to 18 GHz	-27.46	-25.71	-26.18	-26.70	-19.02	-6.69
		18 GHz to 22 GHz	-30.23	-29.09	-29.87	-29.06	-19.02	-10.04

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 8K22101901-00-R1.A3L	Test Dates: 11/07/2022 - 11/15/2022	EUT Type: RRU(RF4451d)		Page 39 of 72	



Middle	0	9 kHz to 150 kHz	-72.91	-72.53	-73.16	-73.47	-49.02	-23.51
		150 kHz to 30 MHz	-57.23	-57.84	-59.01	-58.67	-39.02	-18.21
		30 MHz to 2 GHz	-43.17	-43.12	-43.03	-43.50	-19.02	-24.01
		2 GHz to 2.108 GHz	-38.11	-37.37	-35.45	-36.33	-29.02	-6.43
		2.108 GHz to 2.109 GHz	-29.27	-27.23	-29.30	-27.29	-19.02	-8.21
		2.201 GHz to 2.202 GHz	-28.11	-27.90	-28.16	-30.14	-19.02	-8.88
		2.202 GHz to 3 GHz	-38.00	-35.12	-38.23	-39.18	-29.02	-6.10
		3 GHz to 10 GHz	-26.95	-27.91	-27.42	-27.60	-19.02	-7.93
		10 GHz to 18 GHz	-25.01	-25.41	-24.39	-25.23	-19.02	-5.37
		18 GHz to 22 GHz	-29.82	-29.64	-29.81	-29.25	-19.02	-10.23
	1	9 kHz to 150 kHz	-73.55	-73.51	-73.17	-73.62	-49.02	-24.15
		150 kHz to 30 MHz	-58.06	-57.95	-58.05	-57.49	-39.02	-18.47
		30 MHz to 2 GHz	-43.66	-43.42	-43.84	-44.17	-19.02	-24.40
		2 GHz to 2.108 GHz	-39.49	-39.70	-39.52	-37.67	-29.02	-8.65
		2.108 GHz to 2.109 GHz	-28.43	-28.97	-29.30	-31.12	-19.02	-9.41
		2.201 GHz to 2.202 GHz	-28.51	-28.82	-30.64	-30.63	-19.02	-9.49
		2.202 GHz to 3 GHz	-37.70	-37.41	-39.77	-37.94	-29.02	-8.39
		3 GHz to 10 GHz	-27.77	-27.05	-28.09	-27.22	-19.02	-8.03
		10 GHz to 18 GHz	-26.03	-25.29	-25.22	-26.09	-19.02	-6.20
		18 GHz to 22 GHz	-28.65	-28.69	-29.55	-29.80	-19.02	-9.63
	2	9 kHz to 150 kHz	-73.32	-72.69	-73.38	-73.72	-49.02	-23.67
		150 kHz to 30 MHz	-58.03	-57.50	-56.90	-58.48	-39.02	-17.88
		30 MHz to 2 GHz	-42.57	-44.14	-43.33	-44.04	-19.02	-23.55
		2 GHz to 2.108 GHz	-37.58	-38.15	-38.40	-37.96	-29.02	-8.56
		2.108 GHz to 2.109 GHz	-27.66	-28.05	-29.54	-27.47	-19.02	-8.45
		2.201 GHz to 2.202 GHz	-29.43	-29.54	-27.87	-29.42	-19.02	-8.85
		2.202 GHz to 3 GHz	-37.11	-36.80	-38.05	-36.82	-29.02	-7.78
		3 GHz to 10 GHz	-27.21	-27.03	-27.13	-27.59	-19.02	-8.01
		10 GHz to 18 GHz	-23.72	-24.10	-24.65	-24.14	-19.02	-4.70
		18 GHz to 22 GHz	-28.63	-30.12	-29.21	-29.96	-19.02	-9.61
	3	9 kHz to 150 kHz	-73.50	-72.12	-72.55	-73.08	-49.02	-23.10
		150 kHz to 30 MHz	-57.44	-57.80	-57.65	-58.78	-39.02	-18.42
		30 MHz to 2 GHz	-43.33	-43.42	-44.33	-43.03	-19.02	-24.01
		2 GHz to 2.108 GHz	-38.57	-37.51	-36.20	-38.55	-29.02	-7.18
		2.108 GHz to 2.109 GHz	-29.24	-28.66	-28.14	-28.23	-19.02	-9.12
		2.201 GHz to 2.202 GHz	-28.15	-29.71	-28.18	-29.86	-19.02	-9.13
		2.202 GHz to 3 GHz	-39.00	-38.51	-38.64	-37.81	-29.02	-8.79
		3 GHz to 10 GHz	-27.26	-28.29	-26.50	-27.54	-19.02	-7.48
		10 GHz to 18 GHz	-25.28	-26.63	-26.04	-26.94	-19.02	-6.26
		18 GHz to 22 GHz	-29.33	-30.34	-29.51	-29.35	-19.02	-10.31

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)			<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 40 of 72	





High	0	9 kHz to 150 kHz	-73.65	-72.90	-73.27	-73.22	-49.02	-23.88
		150 kHz to 30 MHz	-58.32	-58.09	-58.35	-57.84	-39.02	-18.82
		30 MHz to 2 GHz	-43.58	-43.53	-43.60	-44.00	-19.02	-24.51
		2 GHz to 2.108 GHz	-35.84	-35.31	-36.17	-35.92	-29.02	-6.29
		2.108 GHz to 2.109 GHz	-27.87	-28.71	-28.13	-27.73	-19.02	-8.71
		2.201 GHz to 2.202 GHz	-20.72	-21.79	-23.57	-24.42	-19.02	-1.70
		2.202 GHz to 3 GHz	-30.30	-33.10	-34.89	-33.30	-29.02	-1.28
		3 GHz to 10 GHz	-27.95	-27.61	-27.37	-27.47	-19.02	-8.35
		10 GHz to 18 GHz	-25.50	-23.93	-25.47	-24.35	-19.02	-4.91
		18 GHz to 22 GHz	-28.85	-28.97	-28.68	-29.49	-19.02	-9.66
	1	9 kHz to 150 kHz	-74.39	-72.93	-73.34	-74.13	-49.02	-23.91
		150 kHz to 30 MHz	-56.40	-59.71	-57.43	-58.43	-39.02	-17.38
		30 MHz to 2 GHz	-43.65	-43.51	-44.15	-43.47	-19.02	-24.45
		2 GHz to 2.108 GHz	-37.67	-37.52	-37.67	-38.03	-29.02	-8.50
		2.108 GHz to 2.109 GHz	-29.24	-30.62	-30.02	-29.81	-19.02	-10.22
		2.201 GHz to 2.202 GHz	-22.10	-21.44	-23.05	-20.80	-19.02	-1.78
		2.202 GHz to 3 GHz	-35.24	-34.91	-35.28	-35.78	-29.02	-5.89
		3 GHz to 10 GHz	-28.46	-27.47	-28.67	-27.68	-19.02	-8.45
		10 GHz to 18 GHz	-25.87	-25.05	-26.07	-26.33	-19.02	-6.03
		18 GHz to 22 GHz	-29.95	-30.54	-29.38	-28.48	-19.02	-9.46
	2	9 kHz to 150 kHz	-74.02	-72.84	-73.81	-73.36	-49.02	-23.82
		150 kHz to 30 MHz	-58.40	-57.80	-59.31	-57.96	-39.02	-18.78
		30 MHz to 2 GHz	-42.74	-43.08	-43.58	-43.76	-19.02	-23.72
		2 GHz to 2.108 GHz	-37.40	-35.98	-36.20	-37.35	-29.02	-6.96
		2.108 GHz to 2.109 GHz	-28.95	-28.40	-28.83	-28.51	-19.02	-9.38
		2.201 GHz to 2.202 GHz	-20.38	-22.35	-20.64	-24.52	-19.02	-1.36
		2.202 GHz to 3 GHz	-34.33	-33.57	-33.62	-34.12	-29.02	-4.55
		3 GHz to 10 GHz	-27.27	-27.02	-26.81	-27.12	-19.02	-7.79
		10 GHz to 18 GHz	-24.95	-24.08	-23.36	-24.66	-19.02	-4.34
		18 GHz to 22 GHz	-27.85	-30.05	-29.35	-29.75	-19.02	-8.83
	3	9 kHz to 150 kHz	-73.56	-73.68	-73.97	-73.82	-49.02	-24.54
		150 kHz to 30 MHz	-58.72	-58.87	-58.19	-55.85	-39.02	-16.83
		30 MHz to 2 GHz	-42.79	-43.70	-44.00	-42.67	-19.02	-23.65
		2 GHz to 2.108 GHz	-37.44	-35.71	-35.94	-36.37	-29.02	-6.69
		2.108 GHz to 2.109 GHz	-29.45	-28.48	-28.37	-28.15	-19.02	-9.13
		2.201 GHz to 2.202 GHz	-24.99	-21.53	-24.80	-24.35	-19.02	-2.51
		2.202 GHz to 3 GHz	-34.73	-30.24	-34.23	-33.86	-29.02	-1.22
		3 GHz to 10 GHz	-26.74	-27.84	-27.28	-26.41	-19.02	-7.39
		10 GHz to 18 GHz	-26.22	-27.10	-26.69	-26.56	-19.02	-7.20
		18 GHz to 22 GHz	-29.31	-28.99	-28.53	-29.48	-19.02	-9.51



**Table 8-16. Conducted Spurious Emission Summary Data (n66\_2C\_5M+5M)**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 41 of 72

Channel	Port	Measurement Range	Level (dBm)				Limit (dBm)	Margin (dB)
			QPSK	16QAM	64QAM	256QAM		
Low	0	9 kHz to 150 kHz	-73.01	-73.25	-72.82	-73.69	-49.02	-23.80
		150 kHz to 30 MHz	-57.64	-57.23	-58.04	-58.26	-39.02	-18.21
		30 MHz to 1 GHz	-47.32	-47.01	-45.00	-46.77	-19.02	-25.98
		1 GHz to 2.108 GHz	-32.69	-32.67	-32.92	-32.49	-29.02	-3.47
		2.108 GHz to 2.109 GHz	-23.52	-23.52	-23.19	-23.49	-19.02	-4.17
		2.201 GHz to 2.202 GHz	-29.03	-29.00	-28.62	-28.99	-19.02	-9.60
		2.202 GHz to 3 GHz	-37.94	-37.88	-38.23	-38.11	-29.02	-8.86
		3 GHz to 10 GHz	-27.51	-26.77	-28.01	-27.29	-19.02	-7.75
		10 GHz to 18 GHz	-24.73	-24.52	-25.38	-24.88	-19.02	-5.50
		18 GHz to 22 GHz	-30.32	-29.57	-29.56	-29.30	-19.02	-10.28
	1	9 kHz to 150 kHz	-73.49	-73.02	-73.07	-73.15	-49.02	-24.00
		150 kHz to 30 MHz	-58.18	-56.87	-58.31	-58.13	-39.02	-17.85
		30 MHz to 1 GHz	-46.65	-46.84	-47.65	-46.64	-19.02	-27.62
		1 GHz to 2.108 GHz	-32.28	-32.20	-32.82	-32.31	-29.02	-3.18
		2.108 GHz to 2.109 GHz	-23.01	-22.91	-23.14	-23.06	-19.02	-3.89
		2.201 GHz to 2.202 GHz	-29.07	-29.23	-28.51	-29.13	-19.02	-9.49
		2.202 GHz to 3 GHz	-38.06	-38.02	-37.84	-38.28	-29.02	-8.82
		3 GHz to 10 GHz	-28.14	-28.29	-27.80	-28.15	-19.02	-8.78
		10 GHz to 18 GHz	-26.26	-26.53	-25.62	-25.42	-19.02	-6.40
		18 GHz to 22 GHz	-28.82	-29.35	-29.99	-27.87	-19.02	-8.85
	2	9 kHz to 150 kHz	-73.55	-73.38	-72.88	-72.70	-49.02	-23.68
		150 kHz to 30 MHz	-57.97	-58.79	-58.38	-58.38	-39.02	-18.95
		30 MHz to 1 GHz	-47.01	-47.35	-45.44	-46.86	-19.02	-26.42
		1 GHz to 2.108 GHz	-32.87	-32.47	-32.99	-32.91	-29.02	-3.45
		2.108 GHz to 2.109 GHz	-23.38	-23.30	-23.58	-23.31	-19.02	-4.28
		2.201 GHz to 2.202 GHz	-28.74	-28.52	-28.52	-28.34	-19.02	-9.32
		2.202 GHz to 3 GHz	-37.75	-37.48	-37.45	-37.00	-29.02	-7.98
		3 GHz to 10 GHz	-27.34	-26.29	-27.34	-27.88	-19.02	-7.27
		10 GHz to 18 GHz	-25.02	-25.10	-23.99	-24.70	-19.02	-4.97
		18 GHz to 22 GHz	-29.01	-29.42	-29.70	-29.12	-19.02	-9.99
	3	9 kHz to 150 kHz	-72.73	-72.35	-72.63	-72.19	-49.02	-23.17
		150 kHz to 30 MHz	-58.32	-58.58	-57.74	-58.17	-39.02	-18.72
		30 MHz to 1 GHz	-47.03	-46.21	-46.18	-46.79	-19.02	-27.16
		1 GHz to 2.108 GHz	-33.71	-33.26	-33.88	-33.15	-29.02	-4.13
		2.108 GHz to 2.109 GHz	-24.25	-24.29	-24.46	-24.17	-19.02	-5.15
		2.201 GHz to 2.202 GHz	-29.15	-29.06	-29.06	-28.78	-19.02	-9.76
		2.202 GHz to 3 GHz	-38.01	-37.81	-37.93	-38.07	-29.02	-8.79
		3 GHz to 10 GHz	-27.97	-26.49	-26.94	-27.60	-19.02	-7.47
		10 GHz to 18 GHz	-27.54	-26.49	-26.21	-26.07	-19.02	-7.05
		18 GHz to 22 GHz	-28.45	-29.55	-29.10	-29.68	-19.02	-9.43



FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 8K22101901-00-R1.A3L	Test Dates: 11/07/2022 - 11/15/2022	EUT Type: RRU(RF4451d)		Page 42 of 72	

Middle	0	9 kHz to 150 kHz	-73.41	-72.77	-73.48	-73.32	-49.02	-23.75
		150 kHz to 30 MHz	-57.91	-58.16	-57.10	-58.04	-39.02	-18.08
		30 MHz to 1 GHz	-46.94	-47.11	-46.52	-46.12	-19.02	-27.10
		1 GHz to 2.108 GHz	-37.22	-37.52	-36.56	-36.43	-29.02	-7.41
		2.108 GHz to 2.109 GHz	-28.05	-28.21	-28.18	-27.91	-19.02	-8.89
		2.201 GHz to 2.202 GHz	-28.67	-28.57	-28.68	-28.53	-19.02	-9.51
		2.202 GHz to 3 GHz	-37.87	-37.97	-37.91	-37.74	-29.02	-8.72
		3 GHz to 10 GHz	-27.68	-27.87	-27.85	-26.36	-19.02	-7.34
		10 GHz to 18 GHz	-24.93	-23.56	-25.14	-23.47	-19.02	-4.45
		18 GHz to 22 GHz	-29.52	-29.90	-29.08	-29.29	-19.02	-10.06
	1	9 kHz to 150 kHz	-73.72	-73.73	-73.61	-73.39	-49.02	-24.37
		150 kHz to 30 MHz	-59.44	-57.22	-58.31	-57.81	-39.02	-18.20
		30 MHz to 1 GHz	-47.45	-46.37	-47.29	-47.32	-19.02	-27.35
		1 GHz to 2.108 GHz	-36.22	-36.11	-36.30	-36.56	-29.02	-7.09
		2.108 GHz to 2.109 GHz	-27.41	-27.21	-27.27	-27.54	-19.02	-8.19
		2.201 GHz to 2.202 GHz	-28.49	-28.32	-28.47	-28.40	-19.02	-9.30
		2.202 GHz to 3 GHz	-37.35	-37.26	-37.43	-37.30	-29.02	-8.24
		3 GHz to 10 GHz	-27.22	-28.30	-27.77	-28.58	-19.02	-8.20
		10 GHz to 18 GHz	-24.56	-25.97	-25.88	-25.98	-19.02	-5.54
		18 GHz to 22 GHz	-29.23	-28.86	-29.41	-29.54	-19.02	-9.84
	2	9 kHz to 150 kHz	-72.81	-73.26	-73.75	-73.42	-49.02	-23.79
		150 kHz to 30 MHz	-57.75	-56.40	-56.83	-58.29	-39.02	-17.38
		30 MHz to 1 GHz	-46.88	-44.86	-47.27	-46.65	-19.02	-25.84
		1 GHz to 2.108 GHz	-36.24	-35.67	-36.49	-36.14	-29.02	-6.65
		2.108 GHz to 2.109 GHz	-27.52	-27.65	-27.56	-27.48	-19.02	-8.46
		2.201 GHz to 2.202 GHz	-28.03	-28.05	-28.11	-27.90	-19.02	-8.88
		2.202 GHz to 3 GHz	-37.27	-36.90	-37.18	-36.76	-29.02	-7.74
		3 GHz to 10 GHz	-26.87	-26.47	-27.18	-26.67	-19.02	-7.45
		10 GHz to 18 GHz	-24.06	-23.28	-23.88	-23.54	-19.02	-4.26
		18 GHz to 22 GHz	-29.14	-28.90	-29.16	-29.43	-19.02	-9.88
	3	9 kHz to 150 kHz	-72.95	-73.11	-73.60	-73.02	-49.02	-23.93
		150 kHz to 30 MHz	-58.41	-58.31	-57.90	-57.40	-39.02	-18.38
		30 MHz to 1 GHz	-46.45	-47.31	-45.64	-46.15	-19.02	-26.62
		1 GHz to 2.108 GHz	-36.19	-35.75	-35.97	-36.24	-29.02	-6.73
		2.108 GHz to 2.109 GHz	-27.43	-27.47	-27.50	-27.48	-19.02	-8.41
		2.201 GHz to 2.202 GHz	-27.54	-27.44	-27.37	-27.43	-19.02	-8.35
		2.202 GHz to 3 GHz	-36.38	-36.28	-36.73	-36.66	-29.02	-7.26
		3 GHz to 10 GHz	-26.09	-27.57	-27.88	-26.87	-19.02	-7.07
		10 GHz to 18 GHz	-26.88	-26.40	-25.75	-26.30	-19.02	-6.73
		18 GHz to 22 GHz	-29.30	-27.14	-29.42	-28.79	-19.02	-8.12



FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 43 of 72	

High	0	9 kHz to 150 kHz	-73.55	-73.63	-72.70	-73.25	-49.02	-23.68
		150 kHz to 30 MHz	-58.23	-56.86	-58.41	-57.81	-39.02	-17.84
		30 MHz to 1 GHz	-46.97	-46.76	-46.60	-45.95	-19.02	-26.93
		1 GHz to 2.108 GHz	-37.17	-38.20	-37.32	-38.12	-29.02	-8.15
		2.108 GHz to 2.109 GHz	-29.05	-29.48	-29.28	-29.44	-19.02	-10.03
		2.201 GHz to 2.202 GHz	-25.16	-25.32	-25.16	-25.27	-19.02	-6.14
		2.202 GHz to 3 GHz	-34.31	-34.84	-34.20	-34.63	-29.02	-5.18
		3 GHz to 10 GHz	-27.33	-27.78	-26.49	-27.12	-19.02	-7.47
		10 GHz to 18 GHz	-25.40	-23.04	-24.56	-24.91	-19.02	-4.02
		18 GHz to 22 GHz	-28.77	-29.98	-29.22	-29.04	-19.02	-9.75
	1	9 kHz to 150 kHz	-72.88	-73.17	-73.02	-74.16	-49.02	-23.86
		150 kHz to 30 MHz	-57.59	-58.16	-58.17	-57.34	-39.02	-18.32
		30 MHz to 1 GHz	-46.63	-46.47	-46.82	-47.40	-19.02	-27.45
		1 GHz to 2.108 GHz	-37.73	-37.30	-38.16	-37.56	-29.02	-8.28
		2.108 GHz to 2.109 GHz	-29.28	-29.11	-28.93	-29.26	-19.02	-9.91
		2.201 GHz to 2.202 GHz	-25.48	-25.74	-25.59	-25.64	-19.02	-6.46
		2.202 GHz to 3 GHz	-34.76	-35.31	-35.01	-35.11	-29.02	-5.74
		3 GHz to 10 GHz	-28.23	-27.76	-27.96	-28.16	-19.02	-8.74
		10 GHz to 18 GHz	-25.79	-25.57	-25.81	-25.25	-19.02	-6.23
		18 GHz to 22 GHz	-28.21	-29.58	-27.70	-29.62	-19.02	-8.68
	2	9 kHz to 150 kHz	-72.84	-73.70	-73.19	-73.78	-49.02	-23.82
		150 kHz to 30 MHz	-57.77	-57.52	-56.83	-58.74	-39.02	-17.81
		30 MHz to 1 GHz	-45.63	-46.06	-47.49	-46.22	-19.02	-26.61
		1 GHz to 2.108 GHz	-37.01	-35.80	-36.78	-36.78	-29.02	-6.78
		2.108 GHz to 2.109 GHz	-27.50	-28.13	-27.71	-28.15	-19.02	-8.48
		2.201 GHz to 2.202 GHz	-24.40	-24.71	-24.45	-24.53	-19.02	-5.38
		2.202 GHz to 3 GHz	-34.00	-34.01	-34.23	-33.72	-29.02	-4.70
		3 GHz to 10 GHz	-26.18	-27.11	-27.46	-27.61	-19.02	-7.16
		10 GHz to 18 GHz	-24.88	-24.72	-24.11	-23.40	-19.02	-4.38
		18 GHz to 22 GHz	-29.46	-28.81	-29.78	-29.07	-19.02	-9.79
	3	9 kHz to 150 kHz	-73.03	-73.15	-73.48	-73.08	-49.02	-24.01
		150 kHz to 30 MHz	-57.69	-58.23	-58.27	-58.31	-39.02	-18.67
		30 MHz to 1 GHz	-47.23	-47.17	-47.36	-47.47	-19.02	-28.15
		1 GHz to 2.108 GHz	-37.35	-37.67	-37.14	-37.36	-29.02	-8.12
		2.108 GHz to 2.109 GHz	-29.03	-29.07	-28.65	-28.42	-19.02	-9.40
		2.201 GHz to 2.202 GHz	-25.19	-25.46	-25.04	-25.35	-19.02	-6.02
		2.202 GHz to 3 GHz	-33.99	-34.76	-34.25	-35.10	-29.02	-4.97
		3 GHz to 10 GHz	-26.97	-28.26	-27.15	-27.28	-19.02	-7.95
		10 GHz to 18 GHz	-25.65	-26.42	-27.06	-25.72	-19.02	-6.63
		18 GHz to 22 GHz	-29.80	-29.88	-29.27	-29.35	-19.02	-10.25

**Table 8-17. Conducted Spurious Emission Summary Data (n66\_2C\_20M+20M)**



FCC ID: A3LRF4451D-70A			<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 44 of 72		

Mode	Port	Measurement Range	Level (dBm)	Limit (dBm)	Margin (dB)
			QPSK		
n66_2NC 5M+5M	0	9 kHz to 150 kHz	-73.60	-49.02	-24.58
		150 kHz to 30 MHz	-57.85	-39.02	-18.83
		30 MHz to 1 GHz	-42.66	-19.02	-23.64
		1 GHz to 2.108 GHz	-32.84	-29.02	-3.82
		2.108 GHz to 2.109 GHz	-23.26	-19.02	-4.24
		2.201 GHz to 2.202 GHz	-23.51	-19.02	-4.49
		2.202 GHz to 3 GHz	-33.43	-29.02	-4.41
		3 GHz to 10 GHz	-27.53	-19.02	-8.51
		10 GHz to 18 GHz	-25.65	-19.02	-6.63
		18 GHz to 22 GHz	-29.76	-19.02	-10.74
	1	9 kHz to 150 kHz	-74.11	-49.02	-25.09
		150 kHz to 30 MHz	-57.45	-39.02	-18.43
		30 MHz to 1 GHz	-44.07	-19.02	-25.05
		1 GHz to 2.108 GHz	-34.66	-29.02	-5.64
		2.108 GHz to 2.109 GHz	-24.55	-19.02	-5.53
		2.201 GHz to 2.202 GHz	-23.93	-19.02	-4.91
		2.202 GHz to 3 GHz	-33.74	-29.02	-4.72
		3 GHz to 10 GHz	-27.39	-19.02	-8.37
		10 GHz to 18 GHz	-25.89	-19.02	-6.87
		18 GHz to 22 GHz	-28.15	-19.02	-9.13
	2	9 kHz to 150 kHz	-74.57	-49.02	-25.55
		150 kHz to 30 MHz	-56.83	-39.02	-17.81
		30 MHz to 1 GHz	-43.07	-19.02	-24.05
		1 GHz to 2.108 GHz	-33.52	-29.02	-4.50
		2.108 GHz to 2.109 GHz	-23.77	-19.02	-4.75
		2.201 GHz to 2.202 GHz	-23.81	-19.02	-4.79
		2.202 GHz to 3 GHz	-33.37	-29.02	-4.35
		3 GHz to 10 GHz	-26.60	-19.02	-7.58
		10 GHz to 18 GHz	-24.67	-19.02	-5.65
		18 GHz to 22 GHz	-29.27	-19.02	-10.25
	3	9 kHz to 150 kHz	-73.74	-49.02	-24.72
		150 kHz to 30 MHz	-57.83	-39.02	-18.81
		30 MHz to 1 GHz	-43.30	-19.02	-24.28
		1 GHz to 2.108 GHz	-33.87	-29.02	-4.85
		2.108 GHz to 2.109 GHz	-23.64	-19.02	-4.62
		2.201 GHz to 2.202 GHz	-24.09	-19.02	-5.07
		2.202 GHz to 3 GHz	-33.43	-29.02	-4.41
		3 GHz to 10 GHz	-27.03	-19.02	-8.01
		10 GHz to 18 GHz	-27.20	-19.02	-8.18
		18 GHz to 22 GHz	-29.09	-19.02	-10.07



FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)			<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 45 of 72	

n66_2NC 20M+20M	0	9 kHz to 150 kHz	-73.48	-49.02	-24.46
		150 kHz to 30 MHz	-58.93	-39.02	-19.91
		30 MHz to 1 GHz	-46.39	-19.02	-27.37
		1 GHz to 2.108 GHz	-32.20	-29.02	-3.18
		2.108 GHz to 2.109 GHz	-22.58	-19.02	-3.56
		2.201 GHz to 2.202 GHz	-20.85	-19.02	-1.83
		2.202 GHz to 3 GHz	-31.08	-29.02	-2.06
		3 GHz to 10 GHz	-27.03	-19.02	-8.01
		10 GHz to 18 GHz	-25.02	-19.02	-6.00
		18 GHz to 22 GHz	-29.25	-19.02	-10.23
	1	9 kHz to 150 kHz	-73.15	-49.02	-24.13
		150 kHz to 30 MHz	-58.06	-39.02	-19.04
		30 MHz to 1 GHz	-46.98	-19.02	-27.96
		1 GHz to 2.108 GHz	-32.41	-29.02	-3.39
		2.108 GHz to 2.109 GHz	-22.92	-19.02	-3.90
		2.201 GHz to 2.202 GHz	-21.33	-19.02	-2.31
		2.202 GHz to 3 GHz	-31.26	-29.02	-2.24
		3 GHz to 10 GHz	-28.56	-19.02	-9.54
		10 GHz to 18 GHz	-25.41	-19.02	-6.39
		18 GHz to 22 GHz	-28.50	-19.02	-9.48
	2	9 kHz to 150 kHz	-73.84	-49.02	-24.82
		150 kHz to 30 MHz	-57.87	-39.02	-18.85
		30 MHz to 1 GHz	-46.67	-19.02	-27.65
		1 GHz to 2.108 GHz	-31.65	-29.02	-2.63
		2.108 GHz to 2.109 GHz	-22.33	-19.02	-3.31
		2.201 GHz to 2.202 GHz	-20.88	-19.02	-1.86
		2.202 GHz to 3 GHz	-31.07	-29.02	-2.05
		3 GHz to 10 GHz	-27.63	-19.02	-8.61
		10 GHz to 18 GHz	-24.89	-19.02	-5.87
		18 GHz to 22 GHz	-29.74	-19.02	-10.72
	3	9 kHz to 150 kHz	-72.88	-49.02	-23.86
		150 kHz to 30 MHz	-57.05	-39.02	-18.03
		30 MHz to 1 GHz	-46.63	-19.02	-27.61
		1 GHz to 2.108 GHz	-32.64	-29.02	-3.62
		2.108 GHz to 2.109 GHz	-23.05	-19.02	-4.03
		2.201 GHz to 2.202 GHz	-21.46	-19.02	-2.44
		2.202 GHz to 3 GHz	-31.53	-29.02	-2.51
		3 GHz to 10 GHz	-27.75	-19.02	-8.73
		10 GHz to 18 GHz	-26.98	-19.02	-7.96
		18 GHz to 22 GHz	-28.39	-19.02	-9.37

**Table 8-18. Conducted Spurious Emission Summary Data  
(n66\_Multi-Carrier\_Non-Contiguous)**



FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 46 of 72

Channel	Port	Measurement Range	Level (dBm)	Limit (dBm)	Margin (dB)
			QPSK		
Low	0	9 kHz to 150 kHz	<b>-69.65</b>	-49.02	-20.63
		150 kHz to 30 MHz	<b>-57.36</b>	-39.02	-18.34
		30 MHz to 1 GHz	<b>-47.26</b>	-19.02	-28.24
		1 GHz to 1.994 GHz	<b>-32.55</b>	-29.02	<b>-3.53</b>
		2.021 GHz to 2.109 GHz	<b>-32.69</b>	-29.02	-3.67
		2.201 GHz to 3 GHz	<b>-36.82</b>	-29.02	-7.80
		3 GHz to 10 GHz	<b>-26.55</b>	-19.02	-7.53
		10 GHz to 18 GHz	<b>-25.21</b>	-19.02	-6.19
		18 GHz to 22 GHz	<b>-28.51</b>	-19.02	-9.49
	1	9 kHz to 150 kHz	-69.78	-49.02	-20.76
		150 kHz to 30 MHz	-57.14	-39.02	-18.12
		30 MHz to 1 GHz	-47.25	-19.02	-28.23
		1 GHz to 1.994 GHz	-32.72	-29.02	-3.70
		2.021 GHz to 2.109 GHz	-32.98	-29.02	-3.96
		2.201 GHz to 3 GHz	-37.22	-29.02	-8.20
		3 GHz to 10 GHz	-27.92	-19.02	-8.90
		10 GHz to 18 GHz	-26.68	-19.02	-7.66
		18 GHz to 22 GHz	-29.34	-19.02	-10.32
	2	9 kHz to 150 kHz	-70.73	-49.02	-21.71
		150 kHz to 30 MHz	-58.41	-39.02	-19.39
		30 MHz to 1 GHz	-46.51	-19.02	-27.49
		1 GHz to 1.994 GHz	-33.16	-29.02	-4.14
		2.021 GHz to 2.109 GHz	-32.81	-29.02	-3.79
		2.201 GHz to 3 GHz	-36.82	-29.02	-7.80
		3 GHz to 10 GHz	-26.80	-19.02	-7.78
		10 GHz to 18 GHz	-25.16	-19.02	-6.14
		18 GHz to 22 GHz	-28.74	-19.02	-9.72
	3	9 kHz to 150 kHz	-70.35	-49.02	-21.33
		150 kHz to 30 MHz	-57.08	-39.02	-18.06
		30 MHz to 1 GHz	-46.30	-19.02	-27.28
		1 GHz to 1.994 GHz	-34.55	-29.02	-5.53
		2.021 GHz to 2.109 GHz	-33.32	-29.02	-4.30
		2.201 GHz to 3 GHz	-36.80	-29.02	-7.78
		3 GHz to 10 GHz	-28.50	-19.02	-9.48
		10 GHz to 18 GHz	-27.19	-19.02	-8.17
		18 GHz to 22 GHz	-29.44	-19.02	-10.42

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 47 of 72	





Middle	0	9 kHz to 150 kHz	-70.33	-49.02	-21.31
		150 kHz to 30 MHz	-58.30	-39.02	-19.28
		30 MHz to 1 GHz	-46.53	-19.02	-27.51
		1 GHz to 1.994 GHz	-32.58	-29.02	-3.56
		2.021 GHz to 2.109 GHz	-34.38	-29.02	-5.36
		2.201 GHz to 3 GHz	-37.39	-29.02	-8.37
		3 GHz to 10 GHz	-27.29	-19.02	-8.27
		10 GHz to 18 GHz	-23.46	-19.02	-4.44
		18 GHz to 22 GHz	-29.88	-19.02	-10.86
	1	9 kHz to 150 kHz	-70.46	-49.02	-21.44
		150 kHz to 30 MHz	-57.41	-39.02	-18.39
		30 MHz to 1 GHz	-46.12	-19.02	-27.10
		1 GHz to 1.994 GHz	-33.61	-29.02	-4.59
		2.021 GHz to 2.109 GHz	-32.97	-29.02	-3.95
		2.201 GHz to 3 GHz	-37.49	-29.02	-8.47
		3 GHz to 10 GHz	-27.91	-19.02	-8.89
		10 GHz to 18 GHz	-26.78	-19.02	-7.76
		18 GHz to 22 GHz	-29.60	-19.02	-10.58
	2	9 kHz to 150 kHz	-70.20	-49.02	-21.18
		150 kHz to 30 MHz	-58.74	-39.02	-19.72
		30 MHz to 1 GHz	-45.74	-19.02	-26.72
		1 GHz to 1.994 GHz	-34.46	-29.02	-5.44
		2.021 GHz to 2.109 GHz	-34.10	-29.02	-5.08
		2.201 GHz to 3 GHz	-36.24	-29.02	-7.22
		3 GHz to 10 GHz	-27.47	-19.02	-8.45
		10 GHz to 18 GHz	-25.07	-19.02	-6.05
		18 GHz to 22 GHz	-29.44	-19.02	-10.42
	3	9 kHz to 150 kHz	-70.67	-49.02	-21.65
		150 kHz to 30 MHz	-58.16	-39.02	-19.14
		30 MHz to 1 GHz	-47.21	-19.02	-28.19
		1 GHz to 1.994 GHz	-33.94	-29.02	-4.92
		2.021 GHz to 2.109 GHz	-35.16	-29.02	-6.14
		2.201 GHz to 3 GHz	-37.15	-29.02	-8.13
		3 GHz to 10 GHz	-27.92	-19.02	-8.90
		10 GHz to 18 GHz	-26.51	-19.02	-7.49
		18 GHz to 22 GHz	-30.30	-19.02	-11.28

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 48 of 72	

High	0	9 kHz to 150 kHz	-70.62	-49.02	-21.60
		150 kHz to 30 MHz	-58.80	-39.02	-19.78
		30 MHz to 1 GHz	-45.88	-19.02	-26.86
		1 GHz to 1.994 GHz	-32.64	-29.02	-3.62
		2.021 GHz to 2.109 GHz	-34.45	-29.02	-5.43
		2.201 GHz to 3 GHz	-35.25	-29.02	-6.23
		3 GHz to 10 GHz	-28.02	-19.02	-9.00
		10 GHz to 18 GHz	-25.01	-19.02	-5.99
		18 GHz to 22 GHz	-29.02	-19.02	-10.00
	1	9 kHz to 150 kHz	-70.61	-49.02	-21.59
		150 kHz to 30 MHz	-58.39	-39.02	-19.37
		30 MHz to 1 GHz	-46.28	-19.02	-27.26
		1 GHz to 1.994 GHz	-33.68	-29.02	-4.66
		2.021 GHz to 2.109 GHz	-33.04	-29.02	-4.02
		2.201 GHz to 3 GHz	-35.43	-29.02	-6.41
		3 GHz to 10 GHz	-27.19	-19.02	-8.17
		10 GHz to 18 GHz	-25.47	-19.02	-6.45
		18 GHz to 22 GHz	-29.22	-19.02	-10.20
	2	9 kHz to 150 kHz	-70.32	-49.02	-21.30
		150 kHz to 30 MHz	-59.02	-39.02	-20.00
		30 MHz to 1 GHz	-46.98	-19.02	-27.96
		1 GHz to 1.994 GHz	-33.33	-29.02	-4.31
		2.021 GHz to 2.109 GHz	-34.42	-29.02	-5.40
		2.201 GHz to 3 GHz	-34.24	-29.02	-5.22
		3 GHz to 10 GHz	-27.28	-19.02	-8.26
		10 GHz to 18 GHz	-24.19	-19.02	-5.17
		18 GHz to 22 GHz	-29.25	-19.02	-10.23
	3	9 kHz to 150 kHz	-70.20	-49.02	-21.18
		150 kHz to 30 MHz	-58.26	-39.02	-19.24
		30 MHz to 1 GHz	-47.01	-19.02	-27.99
		1 GHz to 1.994 GHz	-34.05	-29.02	-5.03
		2.021 GHz to 2.109 GHz	-34.89	-29.02	-5.87
		2.201 GHz to 3 GHz	-34.17	-29.02	-5.15
		3 GHz to 10 GHz	-26.79	-19.02	-7.77
		10 GHz to 18 GHz	-26.87	-19.02	-7.85
		18 GHz to 22 GHz	-29.73	-19.02	-10.71

**Table 8-19. Conducted Spurious Emission Summary Data  
(n70\_1C\_25M + n66\_2C\_20M+20M\_Multi-Band operation)**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 49 of 72	




Plot 8-35. Conducted Spurious Emission Plot  
9 kHz to 150 kHz  
(n66\_1C\_10M\_16QAM - High Channel, Port 2)



Plot 8-36. Conducted Spurious Emission Plot  
150 kHz to 30 MHz  
(n66\_1C\_10M\_16QAM - High Channel, Port 2)



Plot 8-37. Conducted Spurious Emission Plot  
30 MHz to 2 GHz  
(n66\_1C\_10M\_16QAM - High Channel, Port 2)

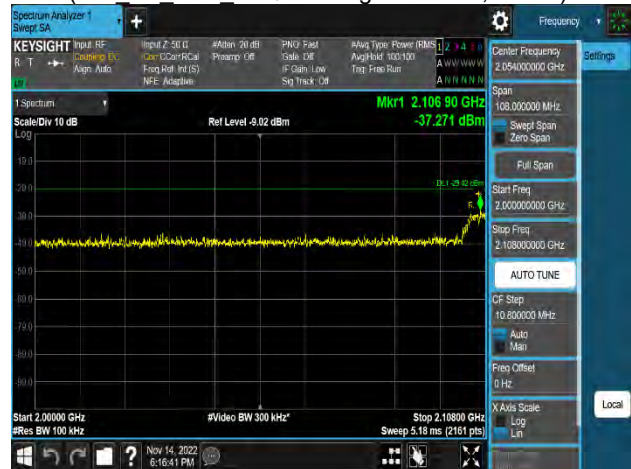

Plot 8-38. Conducted Spurious Emission Plot  
2 GHz to 2.108 GHz  
(n66\_1C\_10M\_16QAM - High Channel, Port 2)



Plot 8-39. Conducted Spurious Emission Plot  
2.108 GHz to 2.109 GHz  
(n66\_1C\_10M\_16QAM - High Channel, Port 2)



Plot 8-40. Conducted Spurious Emission Plot  
2.201 GHz to 2.202 GHz  
(n66\_1C\_10M\_16QAM - High Channel, Port 2)

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 50 of 72






Plot 8-41. Conducted Spurious Emission Plot  
2.202 GHz to 3 GHz  
(n66\_1C\_10M\_16QAM - High Channel, Port 2)



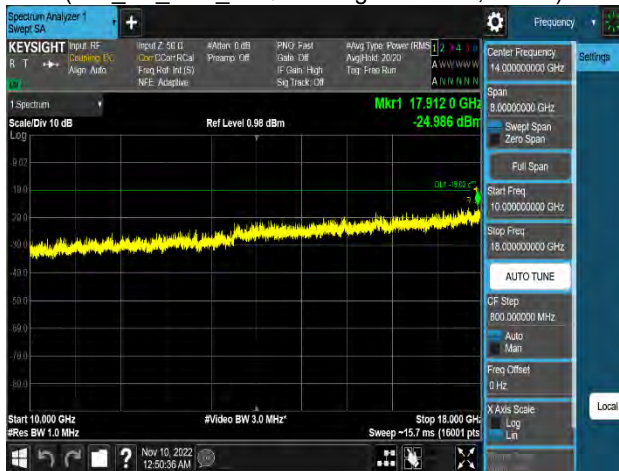

Plot 8-42. Conducted Spurious Emission Plot  
3 GHz to 10 GHz  
(n66\_1C\_10M\_16QAM - High Channel, Port 2)



Plot 8-43. Conducted Spurious Emission Plot  
10 GHz to 18 GHz  
(n66\_1C\_10M\_16QAM - High Channel, Port 2)



Plot 8-44. Conducted Spurious Emission Plot  
18 GHz to 22 GHz  
(n66\_1C\_10M\_16QAM - High Channel, Port 2)


FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 51 of 72



Plot 8-45. Conducted Spurious Emission Plot  
9 kHz to 150 kHz  
(n66\_2C\_5M+5M\_256QAM - Low Channel, Port 0)




Plot 8-46. Conducted Spurious Emission Plot  
150 kHz to 30 MHz  
(n66\_2C\_5M+5M\_256QAM - Low Channel, Port 0)

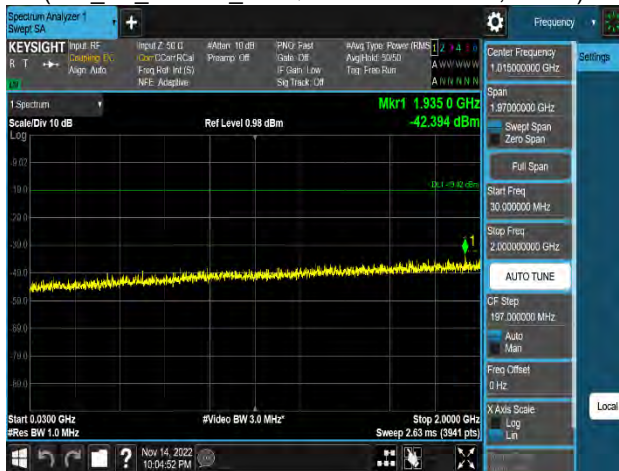


Plot 8-47. Conducted Spurious Emission Plot  
30 MHz to 2 GHz  
(n66\_2C\_5M+5M\_256QAM - Low Channel, Port 0)



Plot 8-48. Conducted Spurious Emission Plot  
2 GHz to 2.108 GHz  
(n66\_2C\_5M+5M\_256QAM - Low Channel, Port 0)

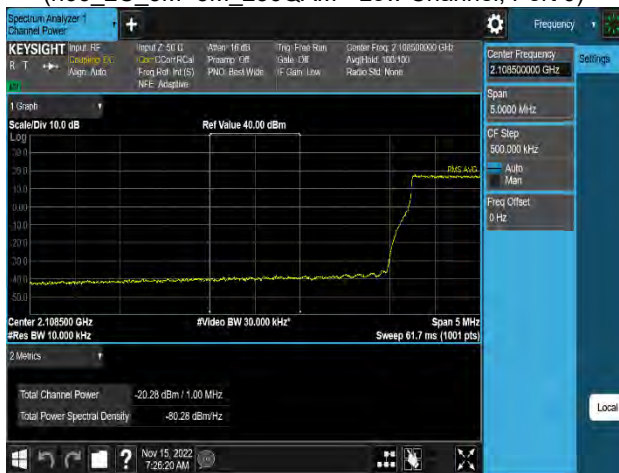

Plot 8-49. Conducted Spurious Emission Plot  
2.108 GHz to 2.109 GHz  
(n66\_2C\_5M+5M\_256QAM - Low Channel, Port 0)

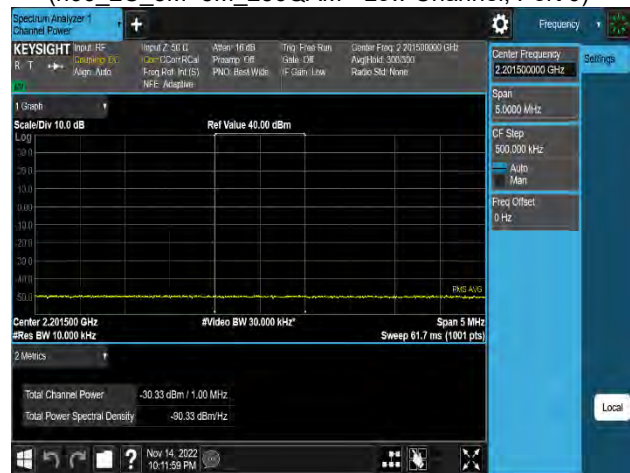


Plot 8-50. Conducted Spurious Emission Plot  
2.201 GHz to 2.202 GHz  
(n66\_2C\_5M+5M\_256QAM - Low Channel, Port 0)

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 52 of 72







Plot 8-51. Conducted Spurious Emission Plot  
2.202 GHz to 3 GHz  
(n66\_2C\_5M+5M\_256QAM - Low Channel, Port 0)

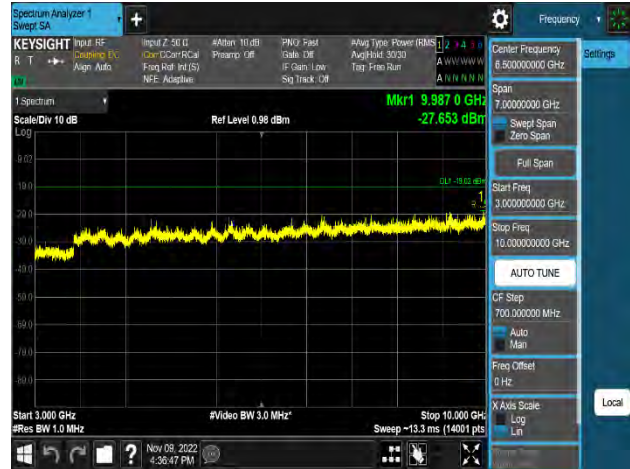

Plot 8-52. Conducted Spurious Emission Plot  
3 GHz to 10 GHz  
(n66\_2C\_5M+5M\_256QAM - Low Channel, Port 0)

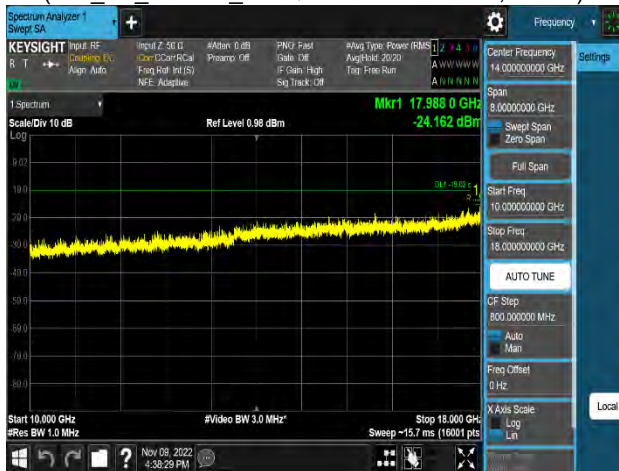


Plot 8-53. Conducted Spurious Emission Plot  
10 GHz to 18 GHz  
(n66\_2C\_5M+5M\_256QAM - Low Channel, Port 0)

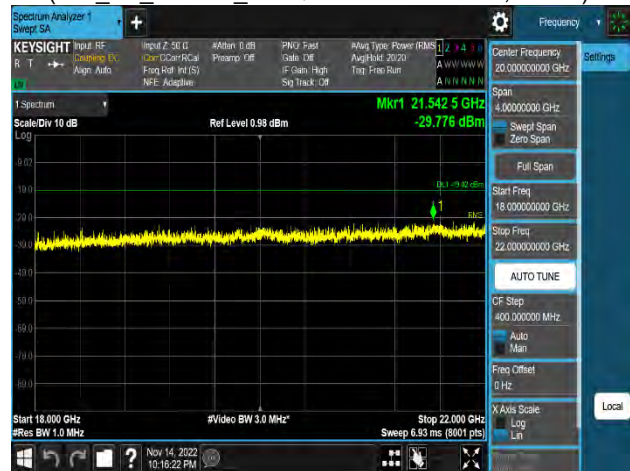

Plot 8-54. Conducted Spurious Emission Plot  
18 GHz to 22 GHz  
(n66\_2C\_5M+5M\_256QAM - Low Channel, Port 0)

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 53 of 72



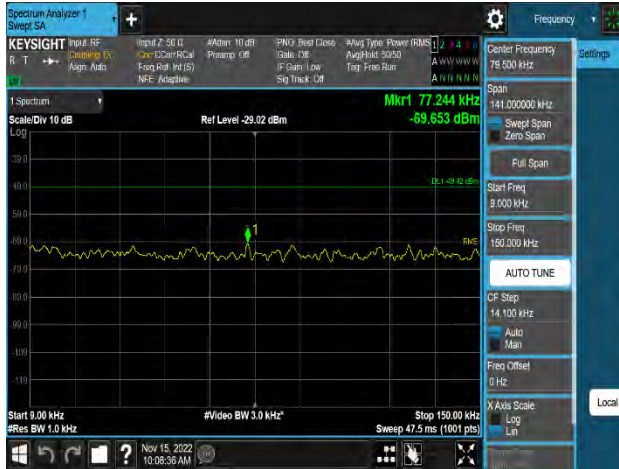


Plot 8-55. Conducted Spurious Emission Plot  
9 kHz to 150 kHz  
(n70\_1C\_25M+n66\_2C\_20M+20M\_QPSK, Port 0)




Plot 8-56. Conducted Spurious Emission Plot  
150 kHz to 30 MHz  
(n70\_1C\_25M+n66\_2C\_20M+20M\_QPSK, Port 0)




Plot 8-57. Conducted Spurious Emission Plot  
30 MHz to 1 GHz  
(n70\_1C\_25M+n66\_2C\_20M+20M\_QPSK, Port 0)

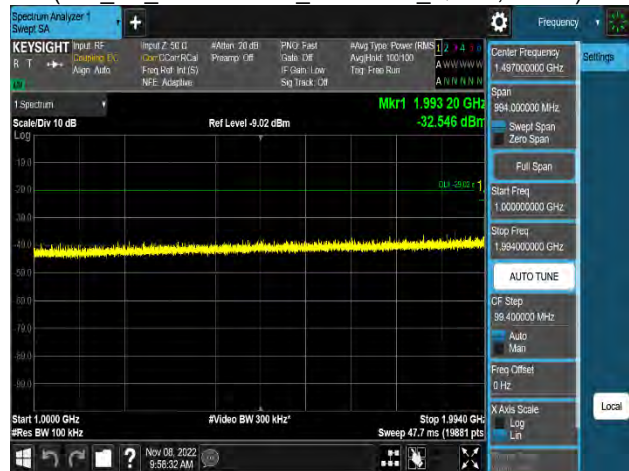

Plot 8-58. Conducted Spurious Emission Plot  
1 GHz to 1.994 GHz  
(n70\_1C\_25M+n66\_2C\_20M+20M\_QPSK, Port 0)

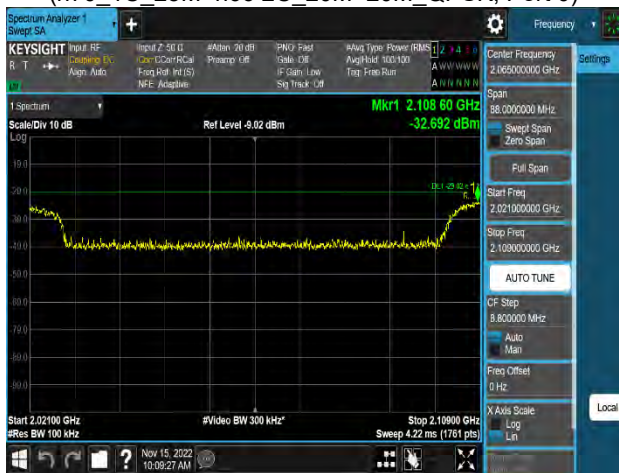

Plot 8-59. Conducted Spurious Emission Plot  
2.021 GHz to 2.109 GHz  
(n70\_1C\_25M+n66\_2C\_20M+20M\_QPSK, Port 0)

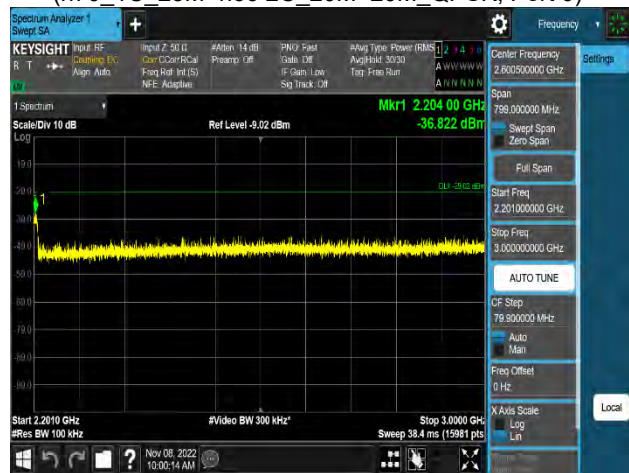

Plot 8-60. Conducted Spurious Emission Plot  
2.201 GHz to 3 GHz  
(n70\_1C\_25M+n66\_2C\_20M+20M\_QPSK, Port 0)


FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 54 of 72





Plot 8-61. Conducted Spurious Emission Plot  
3 GHz to 10 GHz  
(n70\_1C\_25M+n66 2C\_20M+20M\_QPSK, Port 0)

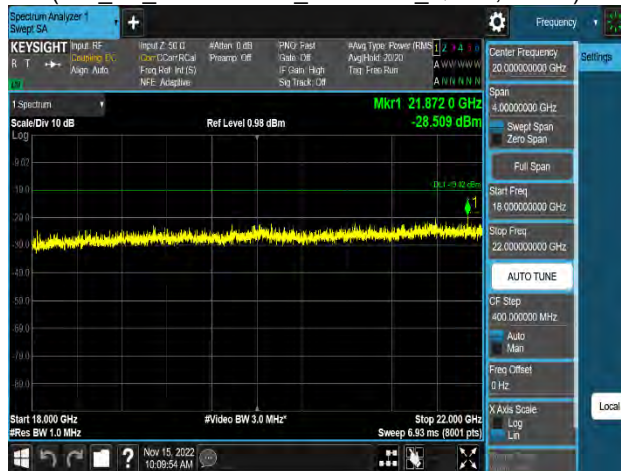

Plot 8-62. Conducted Spurious Emission Plot  
10 GHz to 18 GHz  
(n70\_1C\_25M+n66 2C\_20M+20M\_QPSK, Port 0)



Plot 8-63. Conducted Spurious Emission Plot  
18 GHz to 22 GHz  
(n70\_1C\_25M+n66 2C\_20M+20M\_QPSK, Port 0)

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 55 of 72

## 8.7 Radiated spurious emission

### Test Overview

Radiated spurious emissions measurements are performed using the field strength method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized broadband tri-log antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas.

### Test Procedure Used



ANSI C63.26 - Section 5.5.3.2

### Test Setting

1. Start frequency was set to 30 MHz and stop frequency was set to at least 10 \* the fundamental frequency
2. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1GHz
3. VBW  $\geq 3 \times$  RBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = Peak for the pre-scan, (In cases where the level is within 2 dB of the limit, the final measurement is taken using RMS detector.)
6. Trace mode = Max Hold (In cases where the level is within 2 dB of the limit, the final measurement is taken using triggering/gating and trace averaging.)
7. The trace was allowed to stabilize.


### Limit

The power of any emission outside of the authorized operating frequency range cannot exceed -13 dBm.


FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 56 of 72	

## Test Setup

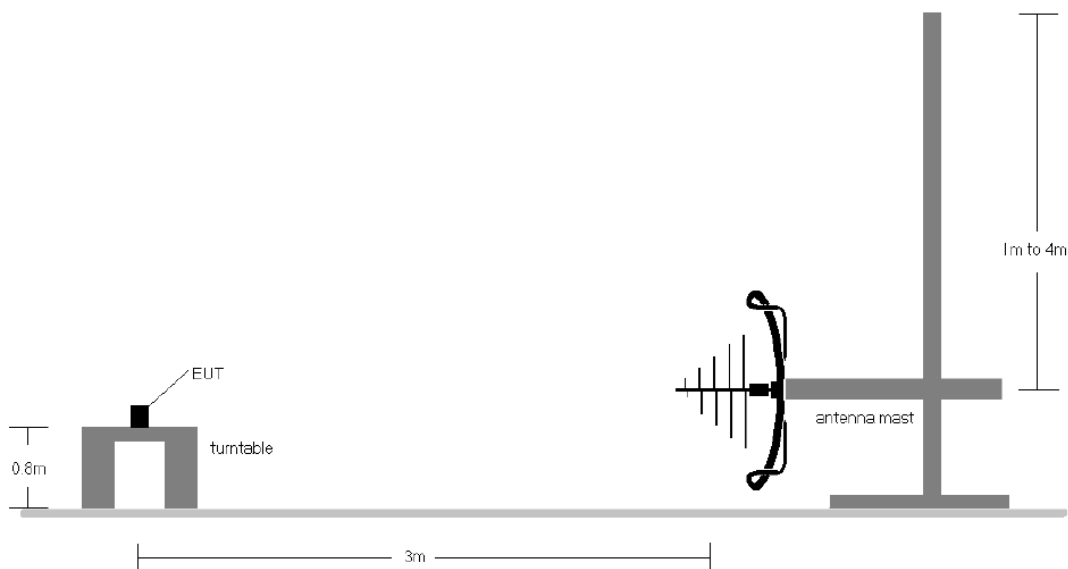

The EUT and measurement equipment were set up as shown in the diagram below.

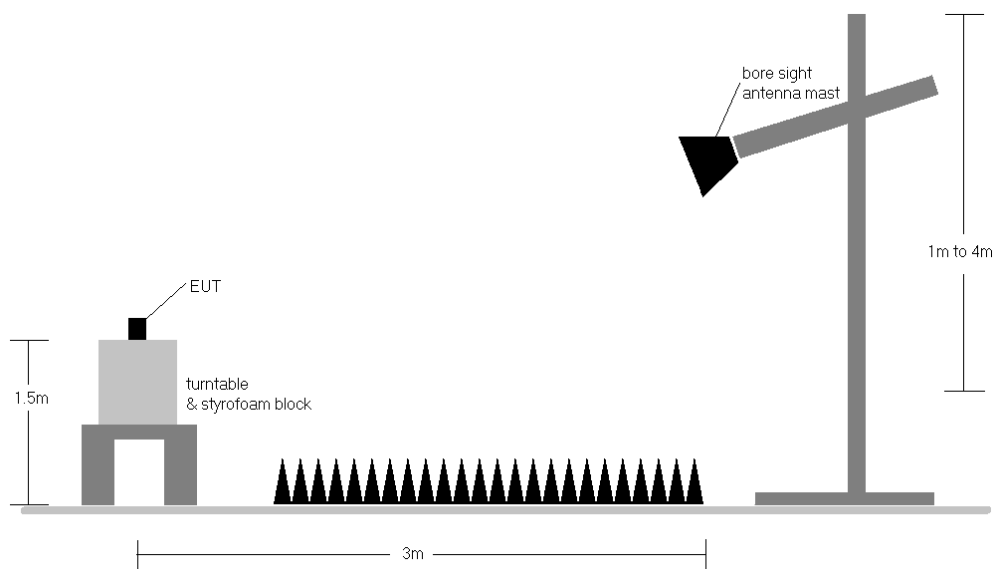

**Figure 8-6. Test Instrument & Measurement Setup < 1 GHz**



**Figure 8-7. Test Instrument & Measurement Setup > 1 GHz**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 57 of 72



## Test Notes

1. The average EIRP reported below is calculated per 5.2.7 of ANSI C63.26-2015 which states:

The measured e.i.r.p is converted to E-field in V/m. Then the distance correction is applied before converted back to calculated e.i.r.p.as explained in KDB 971168 D01 D01 v03r01.

### Effective Isotropic Radiated Power Sample Calculation

$$\begin{aligned}\text{Field Strength [dB}\mu\text{V/m]} &= \text{Measured Value [dBm]} + 107 + \text{AFCL [dB/m]} \\ &= -71.76 \text{ [dBm]} + 107 + 34.38 \text{ [dB/m]} = 69.62 \text{ dB}\mu\text{V/m}\end{aligned}$$



$$\begin{aligned}\text{e.i.r.p. [dBm]} &= E[\text{dB } \mu\text{V/m}] + 20 \log_{10}(d[\text{m}]) - 104.8 \\ &= 69.62 \text{ dB}[\mu\text{V/m}] + (20 * \log(3)) - 104.8 \\ &= -25.64 \text{ dBm}\end{aligned}$$


\*AFCL (dB/m) contains measurement antenna factor(dB/m) and cable loss(dB) as below:

Frequency [MHz]	Antenna Factor (dB/m)	Chamber measurement cable loss + amplifier [dB]	AFCL (dB/m)
988.69	23.17	2.21	25.38
17804.67	46.74	-12.36	34.38


**Table 8-20. Adopted AFCL value in the calculation**

2. The EUT was tested in both horizontal and vertical antenna polarizations and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, channel bandwidth configurations shown in the tables below.
3. The spectrum is measured from 30 MHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
4. All emissions were measured at a 3-meter test distance.
5. Spurious emissions were measured with all EUT antennas transmitting simultaneously and all antenna ports terminated.
6. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
7. All modes of operation were investigated and the worst case configuration results are reported in this section.
8. For below 1 GHz, the result of spurious emissions are attenuated more than 20 dB below the permissible value. So all value does not be reported.


FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 58 of 72

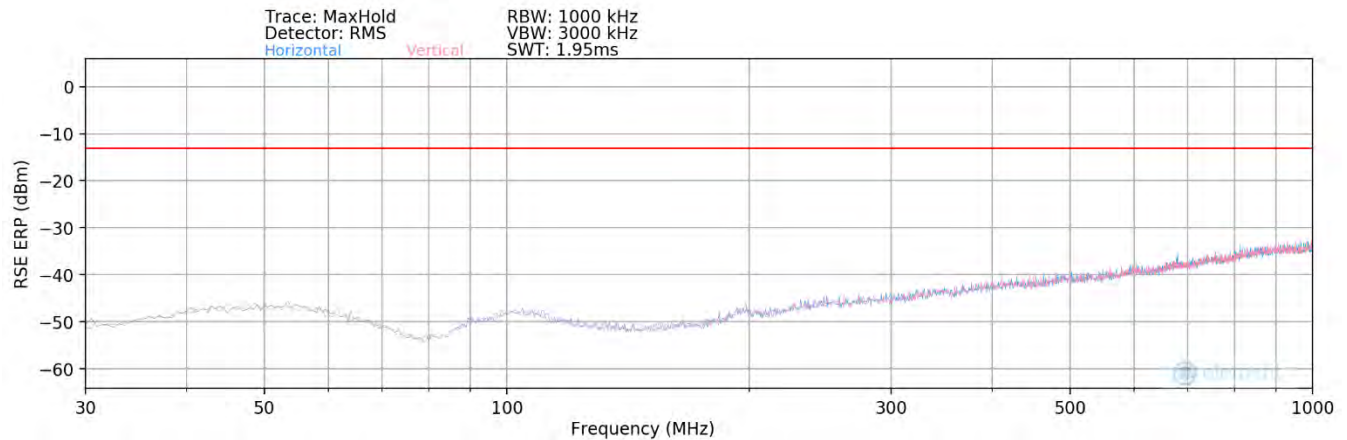

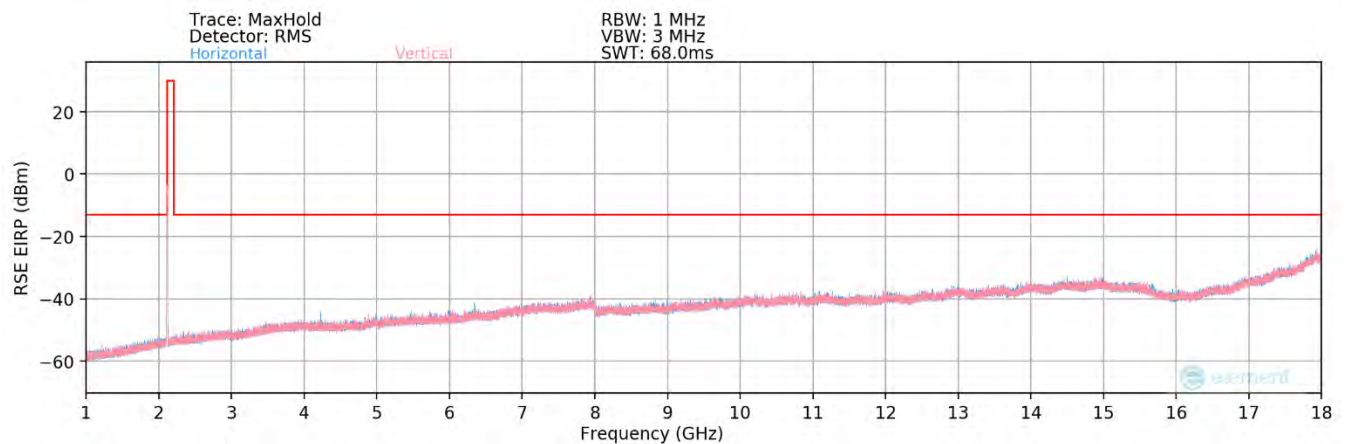

**Plot 8-64. Radiated spurious emission\_30 MHz to 1000 MHz  
(n66\_1C\_10M\_Low Channel)**

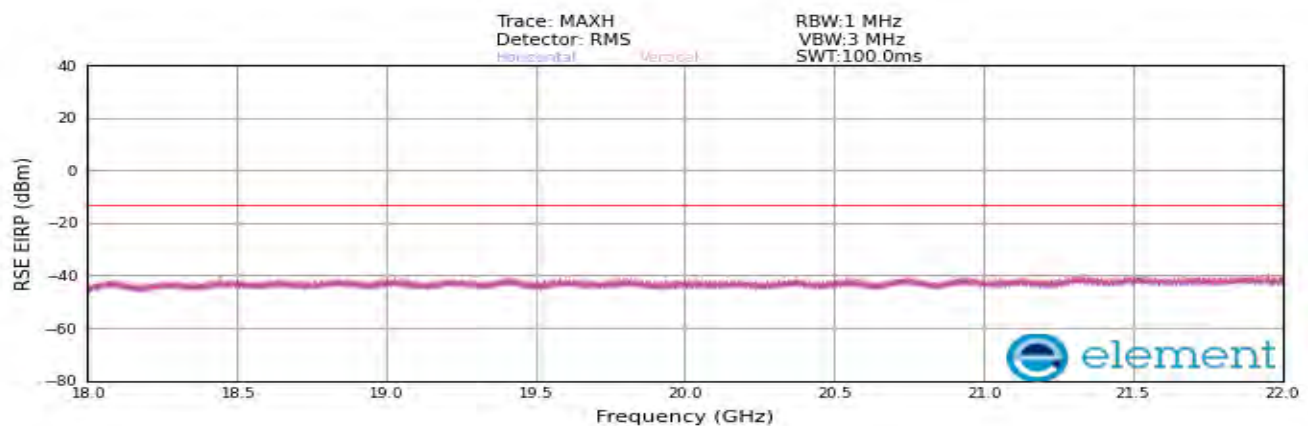


**Plot 8-65. Radiated spurious emission\_1 GHz to 18 GHz  
(n66\_1C\_10M\_Low Channel)**




**Plot 8-66. Radiated spurious emission\_18 GHz to 22 GHz  
(n66\_1C\_10M\_Low Channel)**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 59 of 72




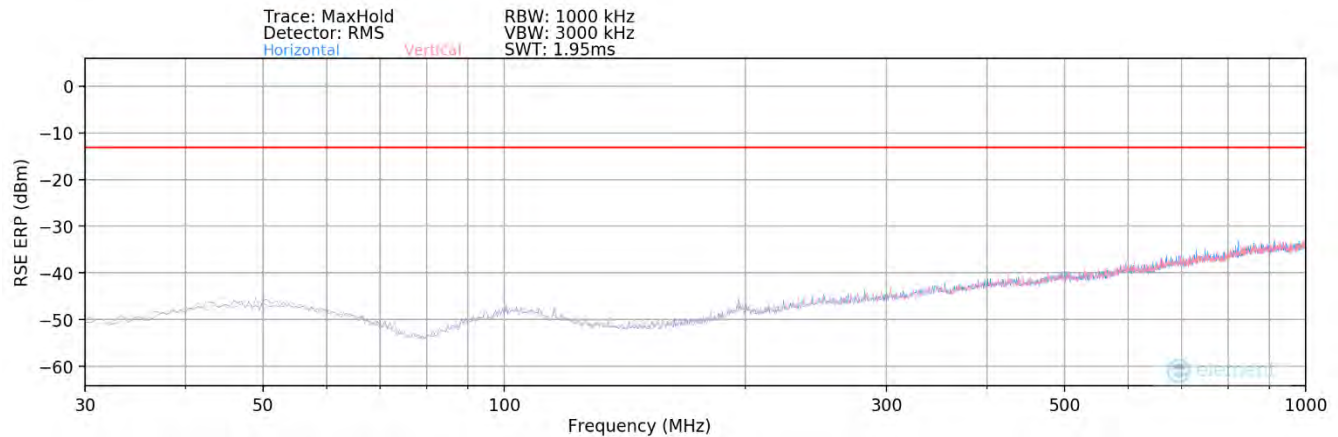

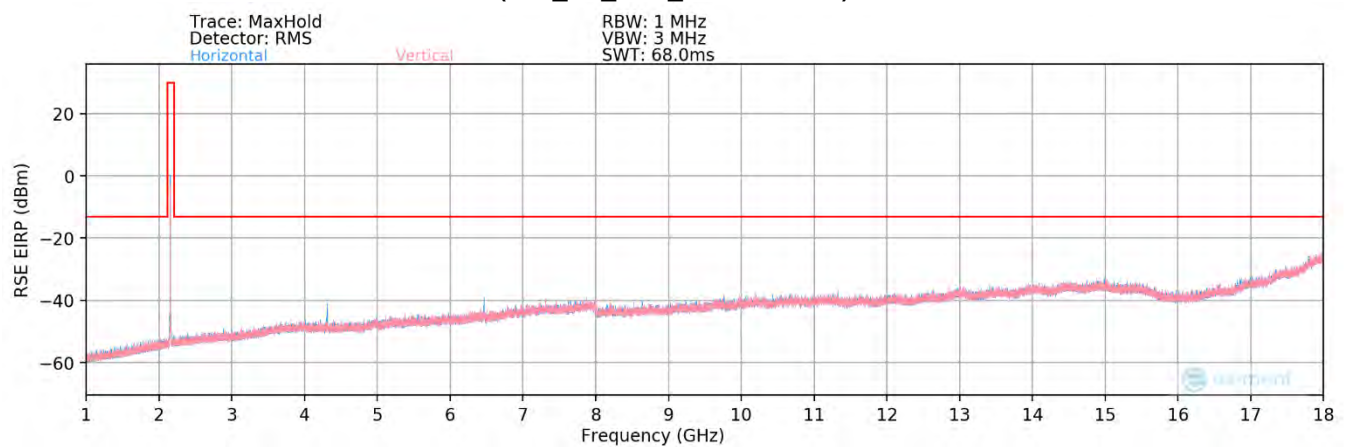

**Plot 8-67. Radiated spurious emission\_30 MHz to 1000 MHz  
(n66\_1C\_10M\_Mid Channel)**

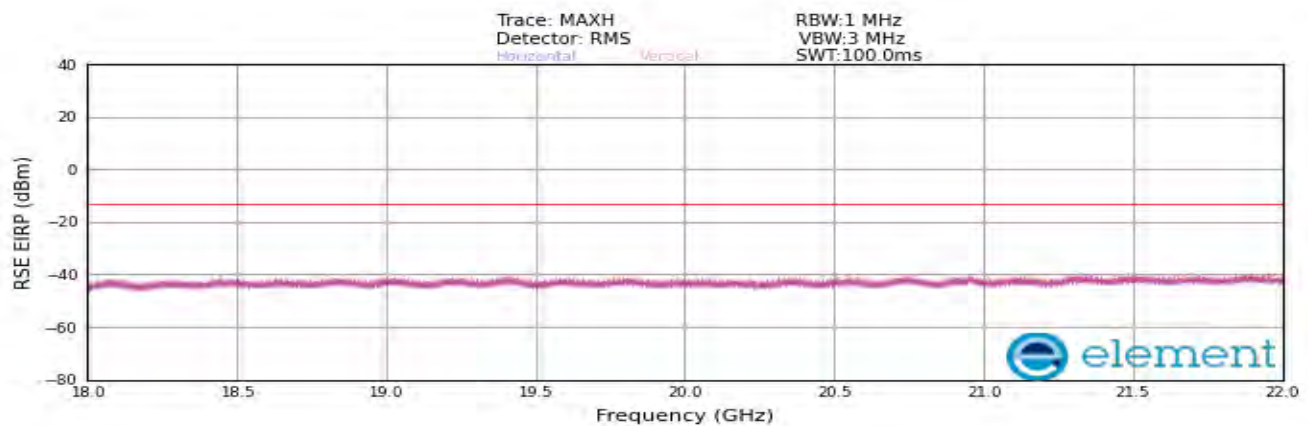


**Plot 8-68. Radiated spurious emission\_1 GHz to 18 GHz  
(n66\_1C\_10M\_Mid Channel)**




**Plot 8-69. Radiated spurious emission\_18 GHz to 22 GHz  
(n66\_1C\_10M\_Mid Channel)**


FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 60 of 72	

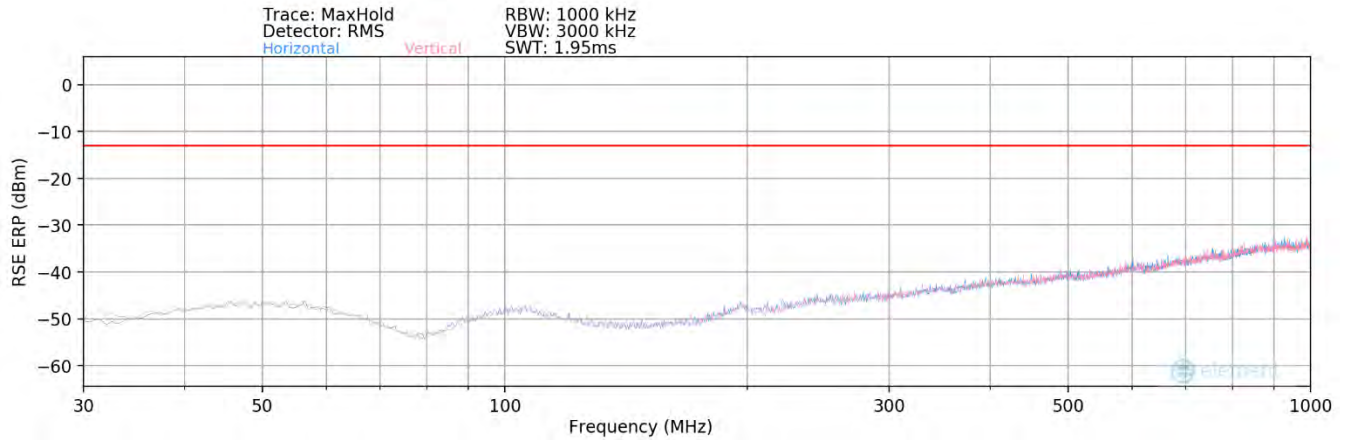

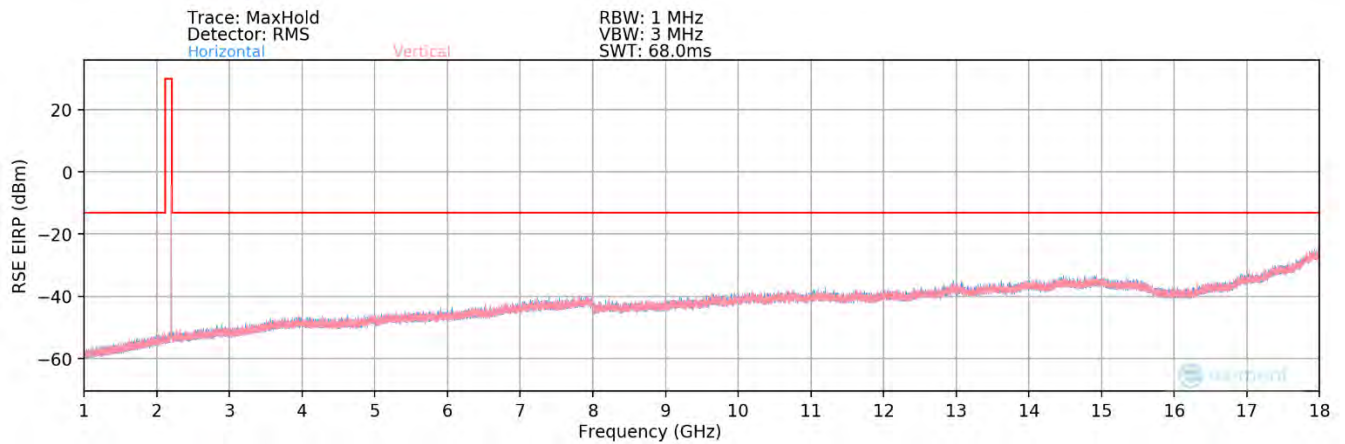

**Plot 8-70. Radiated spurious emission\_30 MHz to 1000 MHz  
(n66\_1C\_10M\_High Channel)**

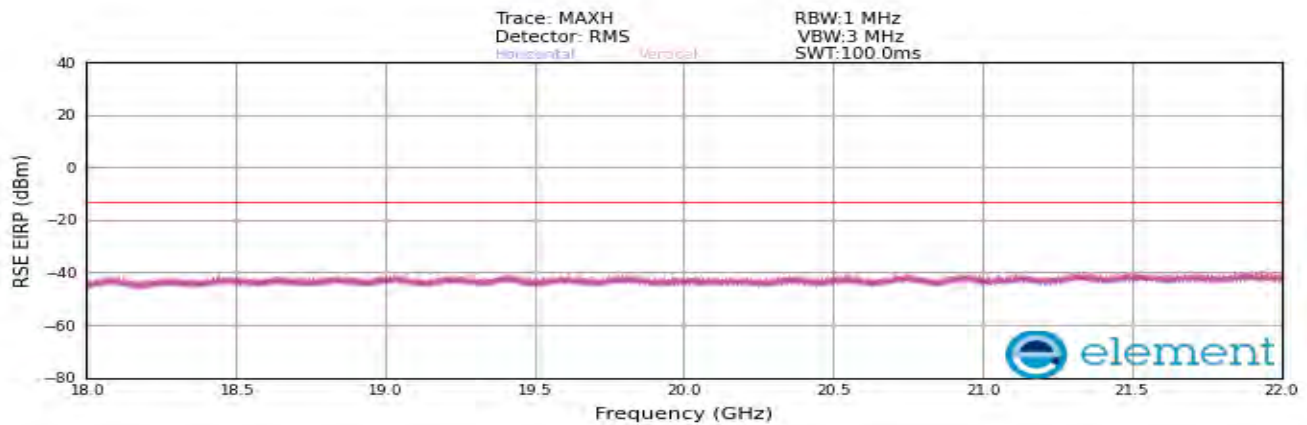


**Plot 8-71. Radiated spurious emission\_1 GHz to 18 GHz  
(n66\_1C\_10M\_High Channel)**




**Plot 8-72. Radiated spurious emission\_18 GHz to 22 GHz  
(n66\_1C\_10M\_High Channel)**

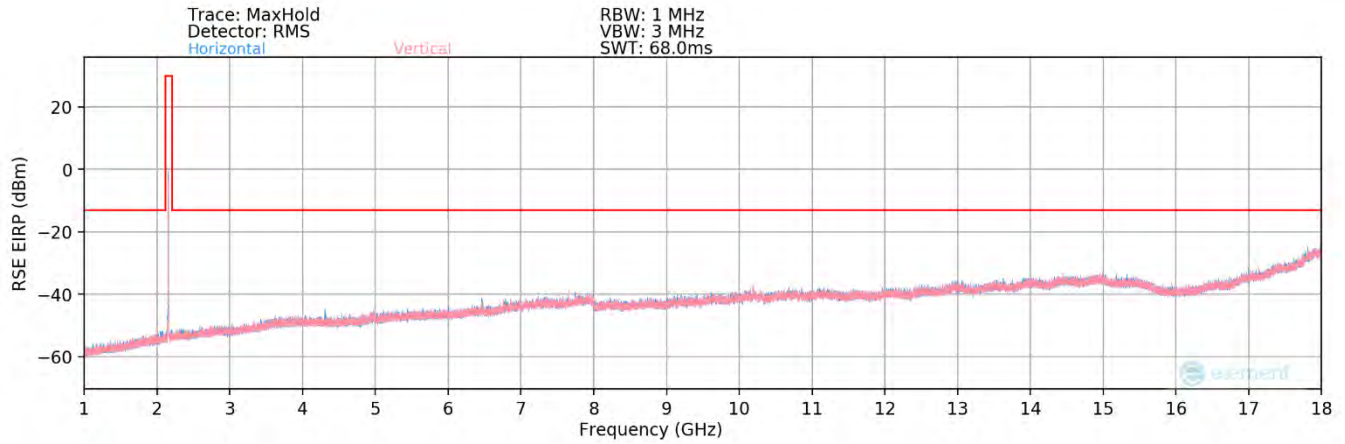

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 61 of 72	

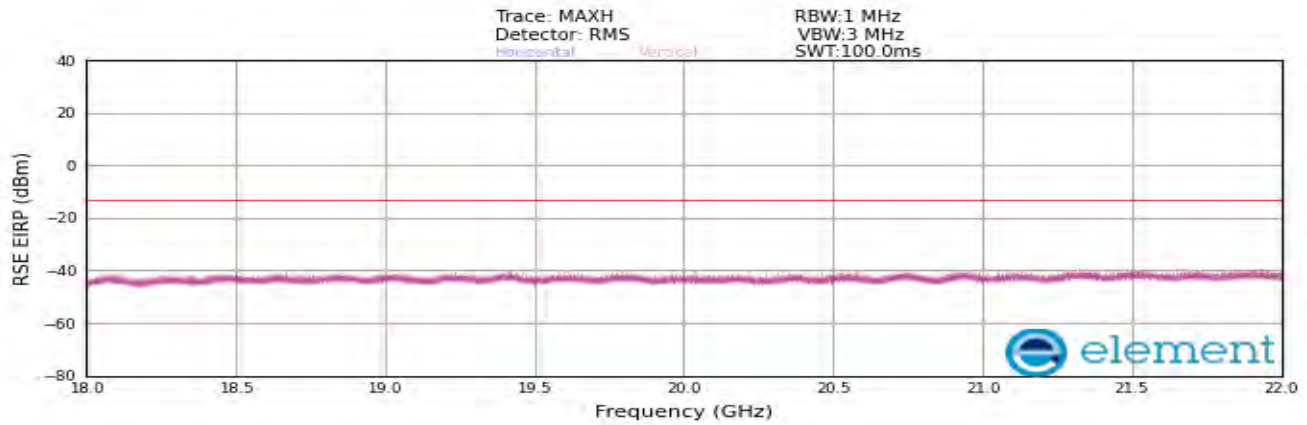


**Plot 8-73. Radiated spurious emission Plot\_1 GHz to 18 GHz  
(n66\_2C\_5M+5M\_Mid Channel)**




**Plot 8-74. Radiated spurious emission Plot\_18 GHz to 22 GHz  
(n66\_2C\_5M+5M\_Mid Channel)**

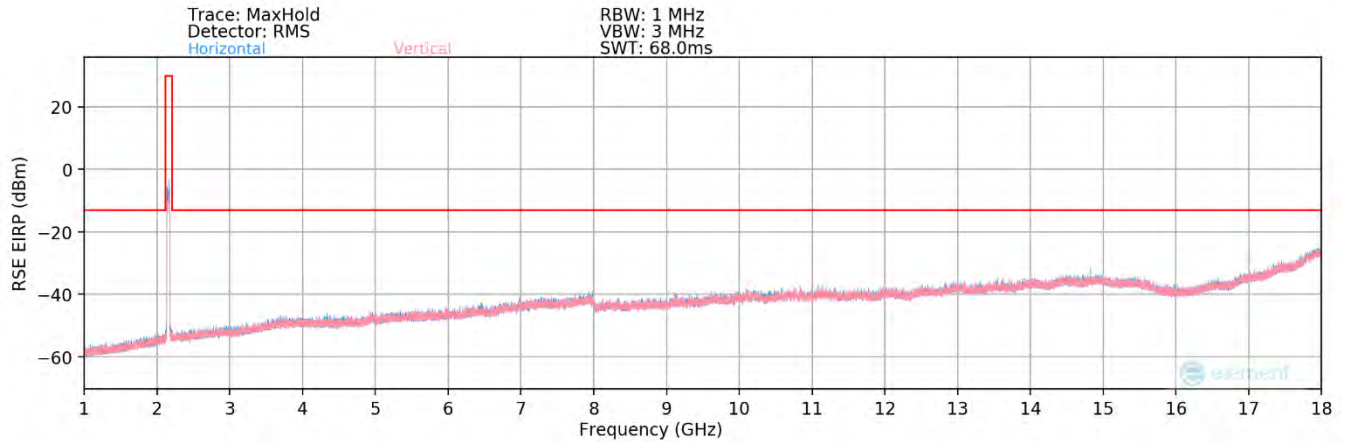

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 62 of 72	

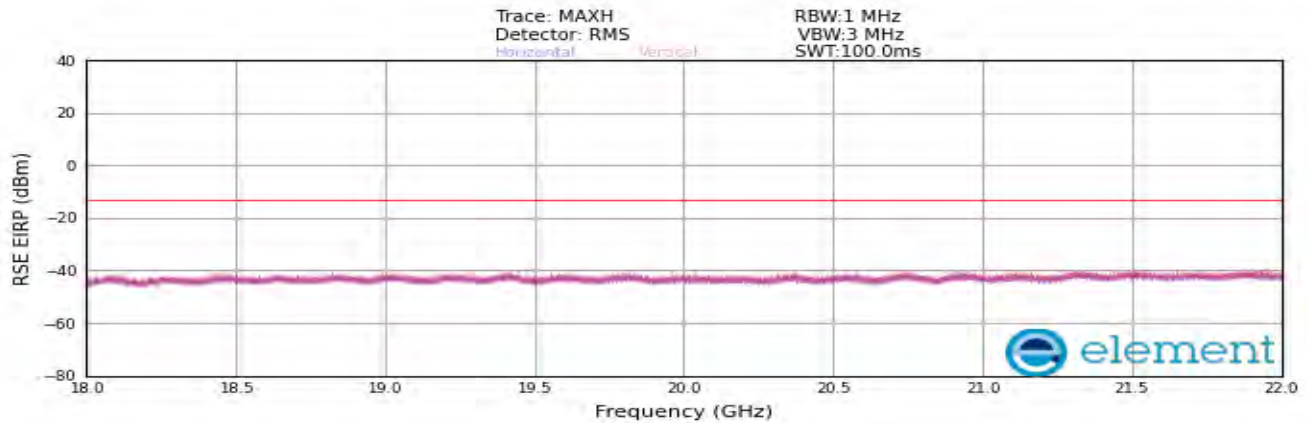


**Plot 8-75. Radiated spurious emission Plot\_1 GHz to 18 GHz  
(n66\_2C\_20M+20M\_Mid Channel)**




**Plot 8-76. Radiated spurious emission Plot\_18 GHz to 22 GHz  
(n66\_2C\_20M+20M\_Mid Channel)**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 63 of 72	



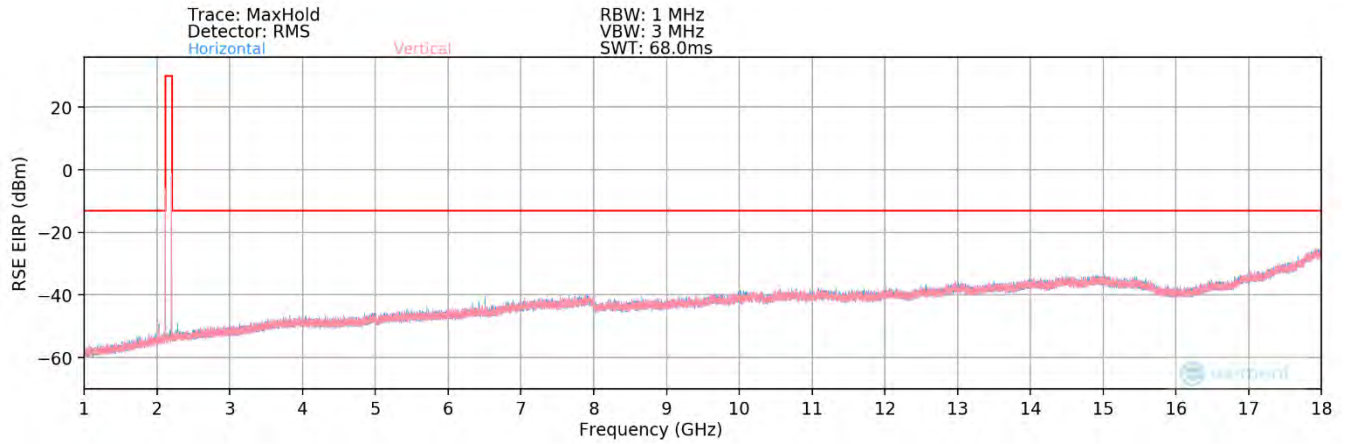

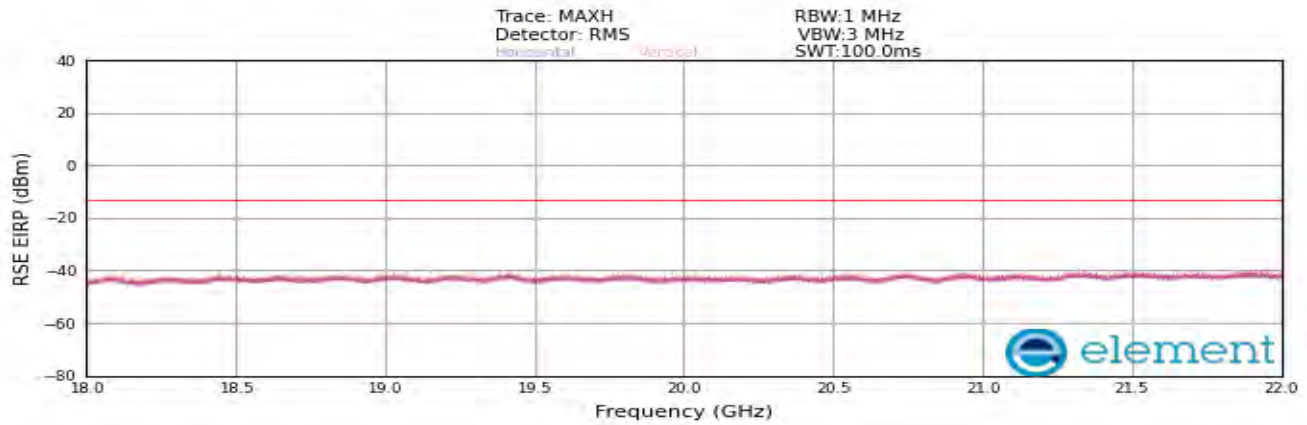


**Plot 8-77. Radiated spurious emission Plot\_1 GHz to 18 GHz  
(n66\_2NC\_5M+5M\_Mid Channel)**




**Plot 8-78. Radiated spurious emission Plot\_18 GHz to 22 GHz  
(n66\_2NC\_5M+5M\_Mid Channel)**

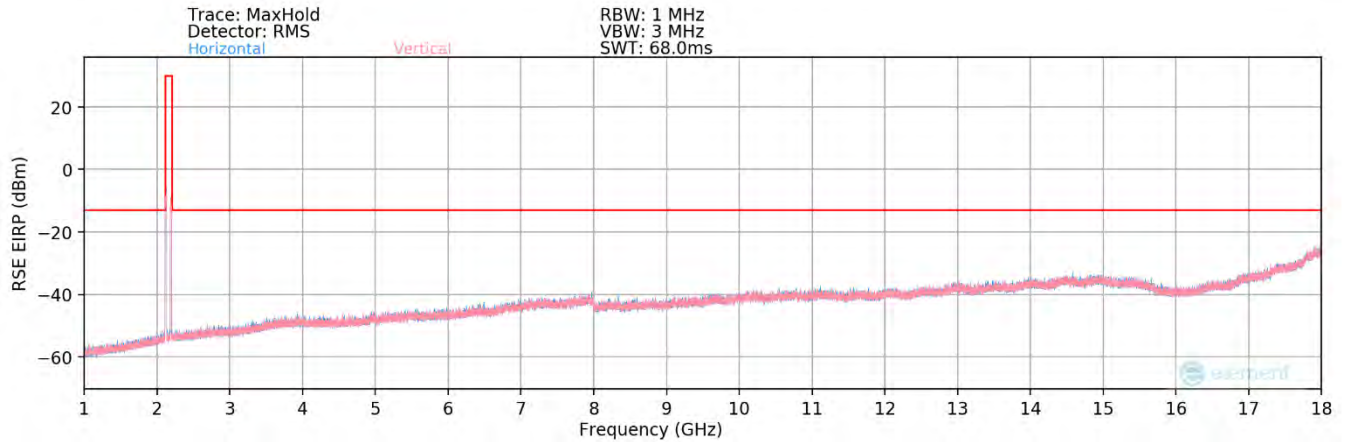

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 64 of 72	

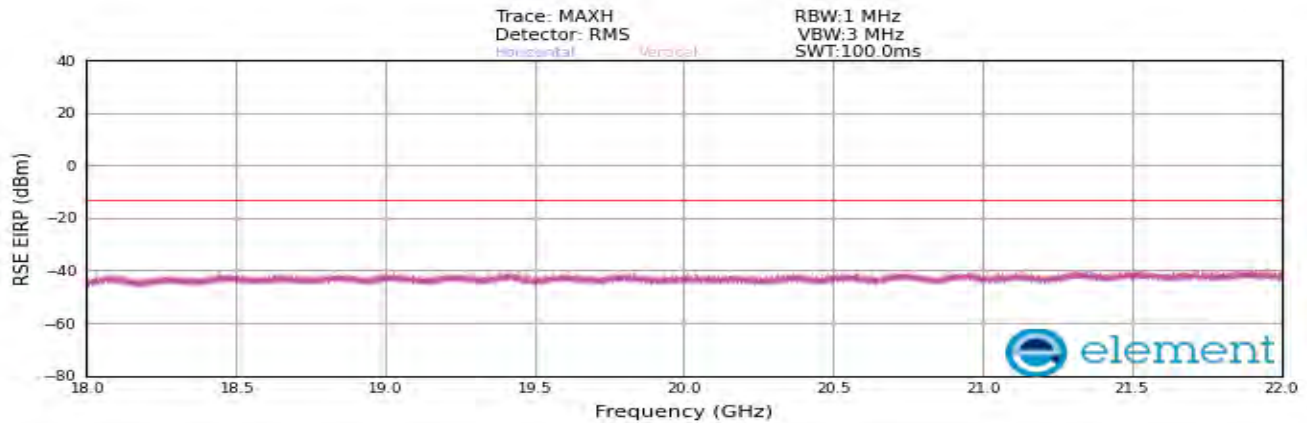


**Plot 8-79. Radiated spurious emission Plot\_1 GHz to 18 GHz  
(n66\_2NC\_20M+20M\_Mid Channel)**




**Plot 8-80. Radiated spurious emission Plot\_18 GHz to 22 GHz  
(n66\_2NC\_20M+20M\_Mid Channel)**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 65 of 72	




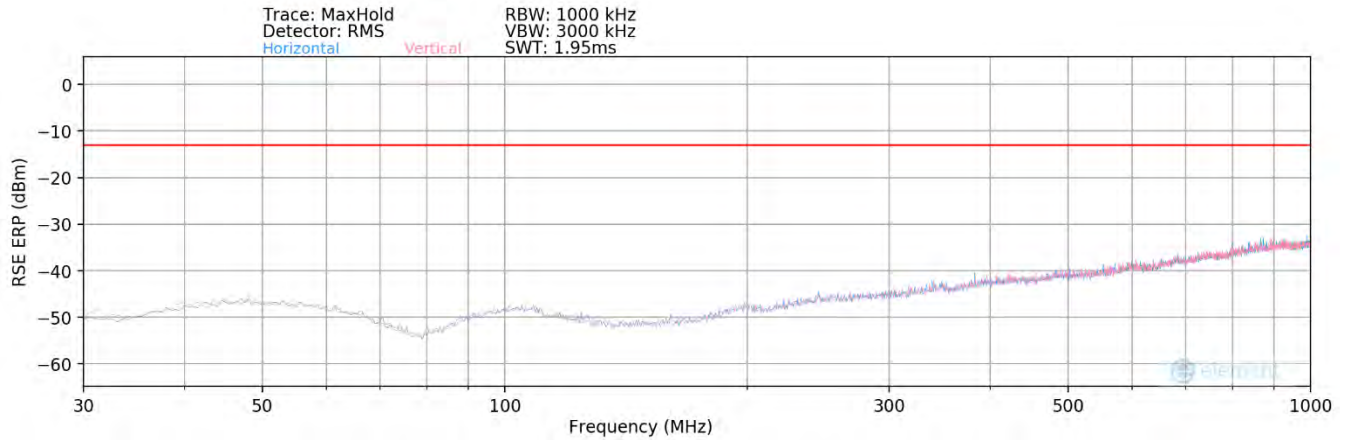

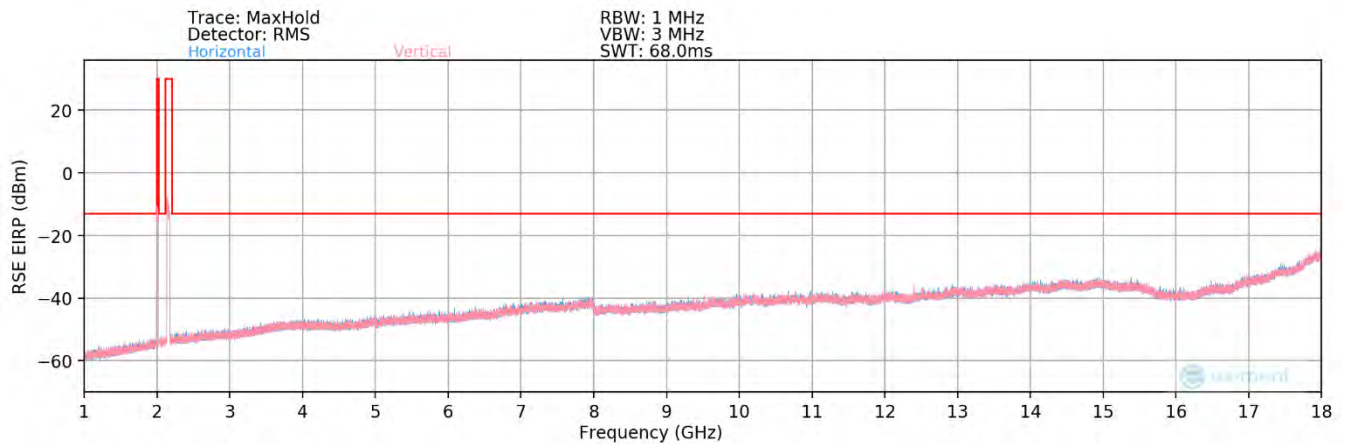

**Plot 8-81. Radiated spurious emission\_30 MHz to 1000 MHz  
(n70\_1C\_25M + n66\_2C\_20M+20M\_Multi-Band operation)**

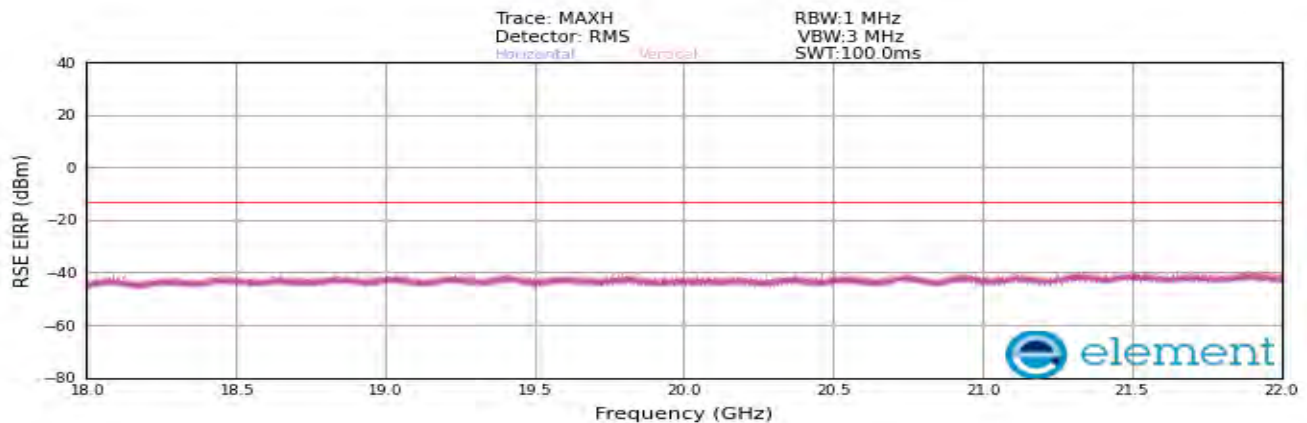

**Plot 8-82. Radiated spurious emission Plot\_1 GHz to 18 GHz  
(n70\_1C\_25M + n66\_2C\_20M+20M\_Multi-Band operation)**





**Plot 8-83. Radiated spurious emission Plot\_18 GHz to 22 GHz  
(n70\_1C\_25M + n66\_2C\_20M+20M\_Multi-Band operation)**

FCC ID: A3LRF4451D-70A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K22101901-00-R1.A3L	Test Dates: 11/07/2022 - 11/15/2022	EUT Type: RRU(RF4451d)		Page 66 of 72

Bandwidth (MHz):	n66_2C_20 MHz + 20MHz_Non-Contiguous
Center Frequency (MHz):	2120 MHz + 2190 MHz
Modulation Signal:	QPSK



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable azimuth [degree]	Analyzer Level [dBm/MHz]	AFCL [dBm]	Field Strength [dBμV/m]	RSE EIRP [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
988.69	H	100	80	-71.56	25.38	60.82	-34.44	-13.00	-21.44
992.83	V	100	40	-72.08	25.47	60.39	-34.87	-13.00	-21.87
17804.67	H	150	40	-71.76	34.38	69.62	-31.04	-13.00	-18.04
17962.41	V	150	120	-72.08	34.78	69.70	-30.49	-13.00	-17.49

**Table 8-21. Radiated spurious emission Worst case Summary Data**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 67 of 72	

## 9.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung RRU(RF4451d) FCC ID: A3LRF4451D-70A** complies with all of the requirements of Part 27 FCC Rules.

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)		Page 68 of 72

## 10.0 APPENDIX. A

### 10.1 Conducted Average Output Power

#### Test Overview

A transmitter port of EUT is connected to the input of a signal analyzer. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

#### Test Description

KDB 971168 D01 v03r01 – Section 5

KDB 662911 D01 v02r01 – Section E)1) In-Band Power Measurements


ANSI C63.26-2015 – Section 5.2.4.4.1

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:

1. Conducted power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 ~ 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Span = 2 ~ 3 x OBW
5. No. of sweep points  $\geq 2 \times$  span / RBW
6. Detector = RMS
7. Trigger Settings is set to "RF Power" for signals with non-continuous operation with the sweep times set to "auto". Refer test note 3 for details.
8. Trace mode = Trace-Averaging (RMS) set to average over 100 sweeps
9. The trace was allowed to stabilize

#### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 10-1. Test Instrument & Measurement Setup**

#### Limit



N/A

FCC ID: A3LRF4451D-70A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K22101901-00-R1.A3L	Test Dates: 11/07/2022 - 11/15/2022	EUT Type: RRU(RF4451d)		Page 69 of 72

# Note

1. Result for reference maximum output power of Grant of Authorization is under section 10.1.
2. MIMO Calculations are done considering output channel power for all ports and respective margins are calculated according to procedures in section 6.4 of ANSI C63.26 and section D of KDB 971168 D01 v03r01.
3. Consider the following factors for MIMO Power:  
 Conducted power for each port is measured in dBm.  
 Powers are summed up in linear using the measure-and-sum technique defined in KDB 971168 D01 v03r01-Section D.  
 Conducted power per port (dBm) is converted to a linear value (mW). A summation of linear powers for all ports gives us the total MIMO conducted power in milliWatts (mW).
4. Sample Calculation:  
 Let us assume the following numbers:
  - a) Total MIMO Conducted Power as 166969.54 mW
  - b)

Factors		Value	Unit
Summed MIMO Conducted Power (linear sum)		166969.54	mW
Summed MIMO Conducted Power (dBm)	$= 10 * \log (166969.54) =$	52.23	dBm



FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 70 of 72	

Channel	Port	QPSK	16QAM	64QAM	256QAM
Low	0	46.34	46.36	46.34	46.39
	1	46.20	46.23	46.22	46.25
	2	46.14	46.20	46.19	46.21
	3	46.14	46.14	46.14	46.18
	Total Conducted Power (mW)	<b>166969.54</b>	168029.19	167638.05	<b>168999.28</b>
	Total Conducted Power(dBm)	<b>52.23</b>	52.25	52.24	<b>52.28</b>
Mid	0	46.03	46.19	46.30	46.34
	1	46.11	46.12	46.23	46.16
	2	46.18	46.24	46.24	46.28
	3	45.97	46.01	45.97	46.06
	Total Conducted Power (mW)	161950.68	164492.28	166243.18	167183.91
	Total Conducted Power(dBm)	52.09	52.16	52.21	52.23
High	0	46.14	46.22	46.13	46.14
	1	46.14	46.16	46.21	46.22
	2	46.38	46.28	46.21	46.33
	3	46.05	46.07	46.01	46.18
	Total Conducted Power (mW)	165952.67	166103.65	164488.97	167443.38
	Total Conducted Power(dBm)	52.20	52.20	52.16	52.24

**Table 10-1. Conducted Average Output Power Table (n66\_1C\_10M)**

Channel	Port	QPSK	16QAM	64QAM	256QAM
Low	0	46.37	46.34	46.25	46.30
	1	46.18	46.09	46.12	46.15
	2	46.16	46.22	46.21	46.25
	3	46.07	46.14	46.13	46.16
	Total Conducted Power (mW)	<b>166608.83</b>	166691.32	165899.16	<b>167342.10</b>
	Total Conducted Power(dBm)	<b>52.22</b>	52.22	52.20	<b>52.24</b>
Mid	0	46.11	46.17	46.21	46.18
	1	46.21	46.18	46.06	46.20
	2	46.06	46.04	46.17	46.13
	3	46.06	46.07	46.00	46.09
	Total Conducted Power (mW)	163344.05	163532.04	163358.26	164847.09
	Total Conducted Power(dBm)	52.13	52.14	52.13	52.17
High	0	46.11	46.09	46.19	46.36
	1	46.16	46.25	46.22	46.12
	2	46.16	46.24	46.17	46.09
	3	46.14	46.05	46.10	46.11
	Total Conducted Power (mW)	164556.41	165158.35	165608.41	165653.72
	Total Conducted Power(dBm)	52.16	52.18	52.19	52.19



**Table 10-2. Conducted Average Output Power Table (n66\_2C\_5M+5M)**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 71 of 72	



Channel	Port	QPSK	16QAM	64QAM	256QAM
Low	0	47.71	47.84	47.87	47.87
	1	47.75	47.78	47.87	47.85
	2	47.58	47.70	47.72	47.72
	3	47.65	47.65	47.75	47.71
	Total Conducted Power (mW)	234076.25	237887.30	<b>241192.46</b>	240365.00
	Total Conducted Power(dBm)	53.69	53.76	<b>53.82</b>	53.81
Mid	0	47.71	47.81	47.80	47.77
	1	47.75	47.78	47.83	47.82
	2	47.72	47.75	47.81	47.77
	3	47.52	47.57	47.64	47.60
	Total Conducted Power (mW)	234236.18	237088.05	239400.90	237760.40
	Total Conducted Power(dBm)	53.70	53.75	53.79	53.76
High	0	47.77	47.74	47.77	47.74
	1	47.80	47.82	47.79	47.78
	2	47.79	47.78	47.80	47.75
	3	47.59	47.61	47.59	47.58
	Total Conducted Power (mW)	<b>237626.14</b>	237619.06	237626.14	236254.14
	Total Conducted Power(dBm)	<b>53.76</b>	53.76	53.76	53.73

**Table 10-3. Conducted Average Output Power Table (n66\_2C\_20M+20M)**

FCC ID: A3LRF4451D-70A		<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K22101901-00-R1.A3L	<b>Test Dates:</b> 11/07/2022 - 11/15/2022	<b>EUT Type:</b> RRU(RF4451d)	Page 72 of 72	