

# **FCC Test Report**

Report No.: AGC00688230406FE06

**FCC ID** : 2AKC6-AX3010

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Wireless USB Adapter

**BRAND NAME** : N/A

**MODEL NAME** : AX3010, AX3008

**APPLICANT**: SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD

**DATE OF ISSUE** : May. 04, 2023

**STANDARD(S)** : FCC Part 15 Subpart E §15.407

**REPORT VERSION**: V1.0

Attestation of Global Explance (Shenzhen) Co., Ltd



Page 2 of 238


# REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May. 04, 2023	Valid	Initial Release




# **TABLE OF CONTENTS**

1.	VERIFICATION OF CONFORMITY	5
2.	GENERAL INFORMATION	6
	2.1. PRODUCT DESCRIPTION	6
	2.2. TABLE OF CARRIER FREQUENCYS	7
	2.3. RELATED SUBMITTAL(S) / GRANT (S)	8
	2.4. TEST METHODOLOGY	8
	2.5. SPECIAL ACCESSORIES	8
	2.6. EQUIPMENT MODIFICATIONS	8
	2.7. ANTENNA REQUIREMENT	8
	2.8. DESCRIPTION OF AVAILABLE ANTENNAS	9
3.	TEST ENVIRONMENT	10
	3.1 ADDRESS OF THE TEST LABORATORY	. 10
	3.2 TEST FACILITY	. 10
	3.3 ENVIRONMENTAL CONDITIONS	1
	3.4 MEASUREMENT UNCERTAINTY	1
	3.5 LIST OF EQUIPMENTS USED	. 12
4.	DESCRIPTION OF TEST MODES	13
5.	SYSTEM TEST CONFIGURATION	
	5.1. CONFIGURATION OF EUT SYSTEM	
	5.2. EQUIPMENT USED IN EUT SYSTEM	
	5.3. SUMMARY OF TEST RESULTS	
6.	RF OUTPUT POWER MEASUREMENT	
	6.1 MEASUREMENT LIMITS	. 15
	6.2 MEASUREMENT PROCEDURE	
	6.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
	6.4 MEASUREMENT RESULT	. 16
7.	6DB&26DB BANDWIDTH MEASUREMENT	
	7.1 MEASUREMENT LIMITS	
	7.2 MEASUREMENT PROCEDURE	
	7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	. 22
	7.4 MEASUREMENT RESULTS	. 23
8.	POWER SPECTRAL DENSITY MEASUREMENT	
	8.1 MEASUREMENT LIMITS	
	8.2 MEASUREMENT PROCEDURE	
	8.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
	8.4 MEASUREMENT RESULT	. 88





9. CONDUCTED SPURIOUS EMISSION	134
9.1 MEASUREMENT LIMIT	134
9.2 MEASUREMENT PROCEDURE	134
9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	134
9.4 MEASUREMENT RESULTS	135
10. RADIATED EMISSION	199
10.1 LIMITS OF RADIATED EMISSION TEST	199
10.2 MEASUREMENT PROCEDURE	200
10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	202
10.4 MEASUREMENT RESULT	203
11. AC POWER LINE CONDUCTED EMISSION TEST	234
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	234
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	234
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	235
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	235
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	236
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	
APPENDIX II: PHOTOGRAPHS OF EUT	238






## 1. VERIFICATION OF CONFORMITY

SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD
3Floor, B Buliding, DaHong Industrial Park, GuangMin District, Shenzhen City, China
SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD
3Floor, B Buliding, DaHong Industrial Park, GuangMin District, Shenzhen City, China
SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD
3Floor, B Buliding, DaHong Industrial Park, GuangMin District, Shenzhen City, China
Wireless USB Adapter
N/A
AX3010
AX3008
All the same except the model name
Apr. 11, 2023
Apr. 11, 2023~May 04, 2023
No any deviation from the test method
Normal
Pass
AGCRT-US-BGN/RF

#### We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

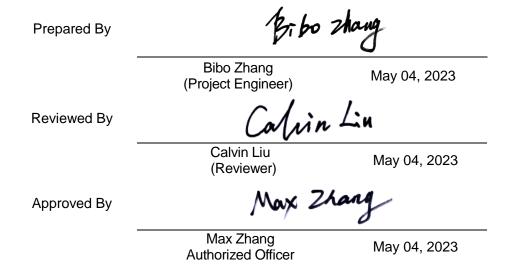



Page 6 of 238

# 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

Equipment Type	☐ Outdoor access points ☐ Indoor access points		
	☐ Fixed P2P access points ☐ Client devices		
Operation Frequency	□ U-NII 1:5150MHz~5250MHz     □ U-NII 2A: 5250MHz~5350MHz		
Operation Frequency	☐ U-NII 2C:5470MHz~5725MHz ☐ U-NII 3: 5725MHz~5850MHz		
DFS Design Type	☐ Master ☐ Slave with radar detection ☐ Slave without radar detection		
TPC Function	☐ Yes ☐ No		
Hardware Version	V2.1		
Software Version	V1.12		
	For 802.11a/n-HT20/ac-VHT20: 5180~5240MHz, 5745~5825MHz		
Test Frequency Range	For 802.11n-HT40/ac-VHT40: 5190~5230MHz, 5755~5795MHz		
	For 802.11ac-VHT80: 5210MHz, 5775MHz		
	IEEE 802.11a(HT20): 5.81dBm; IEEE 802.11n(HT20): 5.42dBm;		
	IEEE802.11n(HT40): 5.63dBm; IEEE 802.11ac(VHT20): 5.13dBm;		
Output Power	IEEE802.11ac(VHT40): 5.10dBm; IEEE802.11ac(VHT80): 5.32dBm;		
	IEEE802.11ax(HE20): 4.95dBm; IEEE802.11ax(HE40): 6.25dBm;		
	IEEE802.11ax(HE80): 5.49dBm		
	IEEE 802.11nHT(20):8.01dBm;IEEE802.11n(HT40):7.85dBm		
Output Dawer MIMO	IEEE 802.11ac(VHT20):7.42dBm; IEEE802.11ac(VHT40):7.81dBm;		
Output Power_MIMO	IEEE802.11ac(VHT80):7.29dBm;IEEE802.11ax(HE20):7.25dBm;		
	IEEE802.11ax(HE40):8.01dBm;IEEE802.11ax(HE80):7.80dBm		
	802.11a/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM		
Modulation	802.11ac :(256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) OFDM		
	802.11ax :(1024-QAM,256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) OFDMA		
	802.11a:6/9/12/18/24/36/48/54Mbps;		
Data Bata	802.11n:up to 300Mbps;		
Data Rate	802.11ac:up to 866.6Mbps;		
	802.11ax:up to 1201Mbps		
Number of channels	7 channels of U-NII-1 Band		
	8 channels of U- NII 3 Band		
Antenna Designation	PIFA Antenna		
Antenna Gain	Refer to Chapter 2.8 of the report.		
Power Supply	DC 5V by PC		



Page 7 of 238

#### 2.2. TABLE OF CARRIER FREQUENCYS

#### For 5180~5240MHz:

# 4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

# 2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

## 1 channel is provided for 802.11ac (VHT80), 802.11ax (VHT80):

Channel	Frequency	Channel	Frequency
42	5210 MHz		

#### For 5745~5825MHz:

## 5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

# 2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

# 1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency	Channel	Frequency
155	5775 MHz		



Page 8 of 238

# 2.3. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID**: **2AKC6-AX3010** filing to comply with the FCC Part 15 requirements.

#### 2.4. TEST METHODOLOGY

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 662911	662911 D01 Multiple Transmitter Output v02r01
5	KDB 789033	789033 D02 General U-NII Test Procedures New Rules v02r01

#### 2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.7. ANTENNA REQUIREMENT

#### **Standard Requirement**

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antennathat uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a brokenantenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **EUT Antenna:**

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna refer to Section 2.8 of the report



Page 9 of 238

#### 2.8. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency	TX Paths	Bandwidth	Max Peak (	Gain (dBi)	Max Directional Gain
Type	Band (MHz)		Paths (MHz) Ant 1 Ant 2		Paths (MHz) Ar	(dBi)
	5G WIFI PIFA Antenna List (5GHz 2*2 MIMO)					
PIFA	PIFA 5150 ~ 5250 2 20,40,80 4.44 5.46					
Antenna	5725 ~ 5850	2	20,40,80	4.44	5.46	8.47

Note 1: The EUT supports Cyclic Delay Diversity (CDD) technology for 802.11n/ac/ax mode.

Note 2: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If all antennas have the same gain, Gant, Directional gain = Gant + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on devices:

Array Gain = 10 log (Nant/ Nss) dB = 3.01;

For power measurements on IEEE 802.1devices:

Array Gain = 0 dB for  $N_{ANT} \le 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥40 MHz for any NANT;

Array Gain = 5 log(Nant/Nss) dB or 3 dB, whichever is less, for 20 MHz channel widths with Nant ≥ 5.

If antenna gains are not equal, Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{\text{ANT}}$  set equal to the gain of the antenna having the highest gain.



Page 10 of 238

#### 3. TEST ENVIRONMENT

#### 3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

## FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

## IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 11 of 238

## 3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS
Temperature range (°ℂ)	15 - 35	-20 - 50
Relative humidty range	20 % - 75 %	20 % - 75 %
Pressure range (kPa)	86 - 106	86 - 106
Power supply	DC 5V	
Note: The Extreme Temperature and F	Extreme Voltages declared by the ma	anufacturer

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

#### 3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U <sub>c</sub> = ±2 %
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2.7 \%$



Page 12 of 238

## 3.5 LIST OF EQUIPMENTS USED

## TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Aug. 04, 2022	Aug. 03, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Test software	R&S	ES-K1 (Ver.V1.71)	N/A	N/A	N/A

## **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
Power sensor	Aglient	U2021XA	MY54110007	Mar. 03, 2023	Mar. 02, 2024
5GHz Fliter	EM Electronics	5150-5880MHz	N/A	N/A	N/A
Attenuator	ZHINAN	E-002	N/A	Sep. 01, 2022	Aug. 31, 2023
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 21, 2023	Apr. 20, 2024
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 01, 2022	Aug. 31, 2023
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 05, 2023	Jan. 04, 2025
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A




Page 13 of 238

## 4. DESCRIPTION OF TEST MODES

Mode	Available channel	Tested channel	Modulation	Date rate (Mbps)
802.11a/n/ac/ax20		36,40, 44,48, 149,153, 157,161,165	OFDM/OFDMA	6Mbps/MCS0
802.11n/ac/ax40	Refer to Section 2.2	38,46,151,159	OFDM/OFDMA	MCS0
802.11ac/ax80		42, 155	OFDM/OFDMA	MCS0

#### Note:

- 1. The EUT has been set to operate continuously on tested channel individually, and the EUT is operating at its maximum duty cycle>or equal 98%.
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.

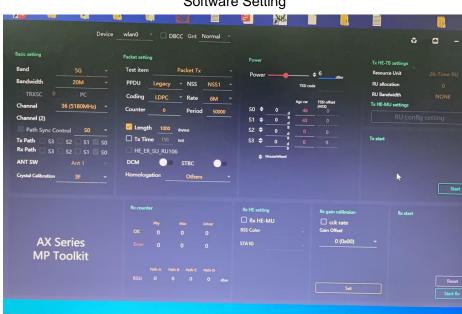


Software Setting



Page 14 of 238

# 5. SYSTEM TEST CONFIGURATION

## **5.1. CONFIGURATION OF EUT SYSTEM**

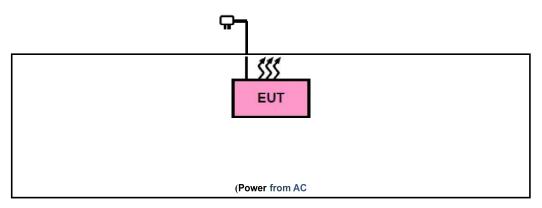

#### **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless USB Adapter	AX3010	2AKC6-AX3010	EUT

#### **5.3. SUMMARY OF TEST RESULTS**

Item	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.407(a/1/3)	RF Output Power	Pass
3	§15.407(e)	6dB Bandwidth Measurement	Pass
4	§2.1049	26dB bandwidth Measurement	Pass
5	§15.407(a/1/3)	Power Spectral Density	Pass
6	§15.407(b)(1/4)	Conducted Spurious Emission	Pass
7	§15.209,§15.407(b)(1/4)	Radiated Emission& Band Edge	Pass
8	§15.207	AC Power Line Conducted Emission	Pass



Page 15 of 238

#### 6. RF OUTPUT POWER MEASUREMENT

#### **6.1 MEASUREMENT LIMITS**

Operation Band		EUT Category	LIMIT		
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p < 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)		
J		Fixed point-to-point Access Point	1 Watt (30 dBm)		
		Indoor Access Point	1 Watt (30 dBm)		
	$\boxtimes$	Client devices	250mW (23.98 dBm)		
U-NII-2A		/	250mW (23.98 dBm) or 11 dBm+10 log B		
U-NII-2C	/		/		250mW (23.98 dBm) or 11 dBm+10 log B*
U-NII-3		/	1 Watt (30 dBm)		

Note: Where B is the 26dB emission bandwidth in MHz.


## **6.2 MEASUREMENT PROCEDURE**

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 12.3.3.1
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.




# 6.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

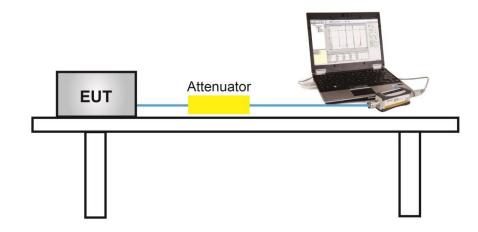


## **6.4 MEASUREMENT RESULT**

	Test Data of Cond	ucted Output Power for band 5.15-5.25	GHz-ANT 1	1
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail
	5180	5.12	23.98	Pass
802.11a	5200	5.04	23.98	Pass
	5240	4.32	23.98	Pass
	5180	5.15	23.98	Pass
802.11n20	5200	4.99	23.98	Pass
	5240	4.98	23.98	Pass
000 11 0 10	5190	5.01	23.98	Pass
802.11n40	5230	4.78	23.98	Pass
	5180	4.50	23.98	Pass
802.11ac20	5200	4.56	23.98	Pass
	5240	4.00	23.98	Pass
802.11ac40	5190	4.77	23.98	Pass
802.118040	5230	5.10	23.98	Pass
802.11ac80	5210	5.32	23.98	Pass
	5180	4.32	23.98	Pass
802.11ax20	5200	4.17	23.98	Pass
	5240	4.08	23.98	Pass
902 11 240	5190	4.68	23.98	Pass
802.11ax40	5230	4.56	23.98	Pass
802.11ax80	5210	5.49	23.98	Pass





	Test Data of Conducte	d Output Power for band 5.15-	5.25 GHz-ANT 2	
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail
	5180	4.75	23.98	Pass
802.11a	5200	4.93	23.98	Pass
	5240	3.93	23.98	Pass
	5180	4.73	23.98	Pass
802.11n20	5200	5.00	23.98	Pass
	5240	4.59	23.98	Pass
802.11n40	5190	4.66	23.98	Pass
002.111140	5230	4.71	23.98	Pass
	5180	4.32	23.98	Pass
802.11ac20	5200	3.82	23.98	Pass
	5240	3.87	23.98	Pass
802.11ac40	5190	4.21	23.98	Pass
002.11a040	5230	4.47	23.98	Pass
802.11ac80	5210	2.92	23.98	Pass
	5180	4.15	23.98	Pass
802.11ax20	5200	3.73	23.98	Pass
	5240	3.36	23.98	Pass
802.11ax40	5190	4.14	23.98	Pass
002.118840	5230	4.04	23.98	Pass
802.11ax80	5210	2.51	23.98	Pass






	Test Data of Conducted Output Power for band 5.725-5.850 GHz-ANT 1					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail		
	5745	3.16	30	Pass		
802.11a	5785	4.81	30	Pass		
	5825	4.26	30	Pass		
	5745	4.34	30	Pass		
802.11n20	5785	4.42	30	Pass		
	5825	4.29	30	Pass		
802.11n40	5755	4.61	30	Pass		
802.111140	5795	4.63	30	Pass		
	5745	4.13	30	Pass		
802.11ac20	5785	3.99	30	Pass		
	5825	2.96	30	Pass		
802.11ac40	5755	3.92	30	Pass		
802.118040	5795	4.01	30	Pass		
802.11ac80	5775	3.18	30	Pass		
	5745	3.95	30	Pass		
802.11ax20	5785	3.20	30	Pass		
	5825	3.31	30	Pass		
902 11 240	5755	5.25	30	Pass		
802.11ax40	5795	4.49	30	Pass		
802.11ax80	5775	2.89	30	Pass		




Page 19 of 238

Test Data of Conducted Output Power for band 5.725-5.850 GHz-ANT 2					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail	
	5745	4.14	30	Pass	
802.11a	5785	3.38	30	Pass	
	5825	3.50	30	Pass	
	5745	4.28	30	Pass	
802.11n20	5785	4.97	30	Pass	
	5825	3.98	30	Pass	
802.11n40	5755	4.40	30	Pass	
002.111140	5795	4.63	30	Pass	
	5745	4.41	30	Pass	
802.11ac20	5785	4.05	30	Pass	
	5825	3.11	30	Pass	
802.11ac40	5755	4.51	30	Pass	
602.11a040	5795	4.05	30	Pass	
802.11ac80	5775	3.32	30	Pass	
	5745	4.00	30	Pass	
802.11ax20	5785	3.81	30	Pass	
	5825	2.95	30	Pass	
902 11 ov 40	5755	4.30	30	Pass	
802.11ax40	5795	4.04	30	Pass	
802.11ax80	5775	4.77	30	Pass	





Test Data of Conducted Output Power for band 5.15-5.25 GHz-MIMO					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail	
	5180	7.96	23.98	Pass	
802.11n20	5200	8.01	23.98	Pass	
	5240	7.80	23.98	Pass	
802.11n40	5190	7.85	23.98	Pass	
802.111140	5230	7.76	23.98	Pass	
	5180	7.42	23.98	Pass	
802.11ac20	5200	7.22	23.98	Pass	
	5240	6.95	23.98	Pass	
802.11ac40	5190	7.51	23.98	Pass	
802.11ac40	5230	7.81	23.98	Pass	
802.11ac80	5210	7.29	23.98	Pass	
	5180	7.25	23.98	Pass	
802.11ax20	5200	6.97	23.98	Pass	
	5240	6.75	23.98	Pass	
802.11ax40	5190	7.96	23.98	Pass	
	5230	8.01	23.98	Pass	
802.11ax80	5210	7.80	23.98	Pass	





Test Data of Conducted Output Power for band 5.725-5.85 GHz-MIMO					
Test Mode	Test Channel (MHz)			Pass or Fail	
	5745	7.32	30	Pass	
802.11n20	5785	7.71	30	Pass	
	5825	7.15	30	Pass	
000 44=40	5755	7.52	30	Pass	
802.11n40	5795	7.64	30	Pass	
	5745	7.28	30	Pass	
802.11ac20	5785	7.03	30	Pass	
	5825	6.05	30	Pass	
000 44 40	5755	7.24	30	Pass	
802.11ac40	5795	7.04	30	Pass	
802.11ac80	5775	6.26	30	Pass	
	5745	6.99	30	Pass	
802.11ax20	5785	6.53	30	Pass	
	5825	6.14	30	Pass	
802.11ax40	5755	7.81	30	Pass	
	5795	7.28	30	Pass	
802.11ax80	5775	6.94	30	Pass	



Page 22 of 238

#### 7. 6DB&26DB BANDWIDTH MEASUREMENT

#### 7.1 MEASUREMENT LIMITS


The minimum 6dB bandwidth shall be at least 500 kHz.

#### 7.2 MEASUREMENT PROCEDURE

- 7.2.1 -6dB bandwidth (DTS bandwidth) Test setting:
  - 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
  - 2. Set the EUT Work on operation frequency individually.
  - 3. Set RBW = 100kHz.
  - 4. Set the VBW ≥3\*RBW. Detector = Peak. Trace mode = max hold.
  - 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
- 7.2.2 99% occupied bandwidth test setting:
  - 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
  - 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
  - 3. Set Span = approximately 1.5 to 5 times the OBW, centered on a nominal channel
    The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
    bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
  - 4. Set SPA Trace 1 Max hold, then View.
- 7.2.3 -26dB Bandwidth test setting:
  - 1. Set RBW = approximately 1% of the emission bandwidth.
  - 2. Set the VBW > RBW.
  - 3. Detector = Peak.
  - 4. Trace mode = max hold.
  - 5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

## 7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

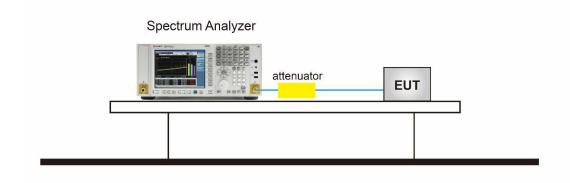




Page 23 of 238


#### 7.4 MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz-ANT 1					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	5180	16.656	21.748	N/A	Pass
802.11a	5200	16.651	21.769	N/A	Pass
	5240	16.623	21.841	N/A	Pass
	5180	17.761	22.364	N/A	Pass
802.11n20	5200	17.776	22.396	N/A	Pass
	5240	17.783	22.175	N/A	Pass
802.11n40	5190	36.493	43.483	N/A	Pass
002.111140	5230	36.441	42.861	N/A	Pass
	5180	17.788	22.560	N/A	Pass
802.11ac20	5200	17.780	22.318	N/A	Pass
	5240	17.799	22.673	N/A	Pass
802.11ac40	5190	36.513	44.514	N/A	Pass
002.11ac40	5230	36.485	43.270	N/A	Pass
802.11ac80	5210	75.926	83.707	N/A	Pass
	5180	18.965	22.593	N/A	Pass
802.11ax20	5200	18.968	22.573	N/A	Pass
	5240	18.961	22.435	N/A	Pass
902 11 ov 40	5190	37.962	42.613	N/A	Pass
802.11ax40	5230	37.894	42.163	N/A	Pass
802.11ax80	5210	77.244	80.109	N/A	Pass






Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz-ANT 2					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	5180	16.623	21.786	N/A	Pass
802.11a	5200	16.610	21.792	N/A	Pass
	5240	16.632	21.694	N/A	Pass
	5180	17.772	22.299	N/A	Pass
802.11n20	5200	17.772	22.460	N/A	Pass
	5240	17.776	22.294	N/A	Pass
802.11n40	5190	36.415	42.818	N/A	Pass
002.111140	5230	36.462	42.765	N/A	Pass
	5180	17.811	22.497	N/A	Pass
802.11ac20	5200	17.767	22.231	N/A	Pass
	5240	17.763	22.475	N/A	Pass
902 110010	5190	36.505	43.983	N/A	Pass
802.11ac40	5230	36.523	44.210	N/A	Pass
802.11ac80	5210	75.887	83.461	N/A	Pass
	5180	18.957	22.459	N/A	Pass
802.11ax20	5200	18.952	22.313	N/A	Pass
	5240	18.954	22.681	N/A	Pass
802.11ax40	5190	38.011	42.745	N/A	Pass
	5230	37.876	42.857	N/A	Pass
802.11ax80	5210	77.294	80.135	N/A	Pass






Test Data of Occupied Bandwidth and DTS Bandwidth for band 5.725-5.85 GHz-ANT 1						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	Limits (MHz)	Pass or Fail	
	5745	16.643	16.352	0.5	Pass	
802.11a	5785	16.627	16.379	0.5	Pass	
	5825	16.651	16.333	0.5	Pass	
	5745	17.773	17.584	0.5	Pass	
802.11n20	5785	17.776	17.540	0.5	Pass	
	5825	17.767	17.601	0.5	Pass	
802.11n40	5755	36.452	36.305	0.5	Pass	
802.111140	5795	36.458	36.444	0.5	Pass	
	5745	17.799	17.530	0.5	Pass	
802.11ac20	5785	17.798	17.587	0.5	Pass	
	5825	17.817	17.556	0.5	Pass	
802.11ac40	5755	36.523	36.447	0.5	Pass	
602.11a040	5795	36.496	36.462	0.5	Pass	
802.11ac80	5775	75.913	76.399	0.5	Pass	
	5180	18.959	18.726	0.5	Pass	
802.11ax20	5200	18.946	18.666	0.5	Pass	
	5240	18.944	18.617	0.5	Pass	
802.11ax40	5190	37.930	37.953	0.5	Pass	
002.11ax40	5230	37.893	37.643	0.5	Pass	
802.11ax80	5210	77.210	77.212	0.5	Pass	







Test Data of Occupied Bandwidth and DTS Bandwidth for band 5.725-5.85 GHz-ANT 2					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	5745	16.657	16.342	0.5	Pass
802.11a	5785	16.635	16.345	0.5	Pass
	5825	16.650	16.364	0.5	Pass
	5745	17.783	17.595	0.5	Pass
802.11n20	5785	17.765	17.592	0.5	Pass
	5825	17.756	17.580	0.5	Pass
802.11n40	5755	36.437	36.461	0.5	Pass
002.111140	5795	36.431	36.439	0.5	Pass
	5745	17.803	17.576	0.5	Pass
802.11ac20	5785	17.812	17.590	0.5	Pass
	5825	17.784	17.546	0.5	Pass
802.11ac40	5755	36.503	36.449	0.5	Pass
002.11ac40	5795	36.528	36.446	0.5	Pass
802.11ac80	5775	75.847	76.349	0.5	Pass
	5180	18.949	18.738	0.5	Pass
802.11ax20	5200	18.966	18.789	0.5	Pass
	5240	18.947	18.532	0.5	Pass
802.11ax40	5190	37.845	37.920	0.5	Pass
002.118840	5230	37.982	37.603	0.5	Pass
802.11ax80	5210	77.256	77.578	0.5	Pass







## Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz

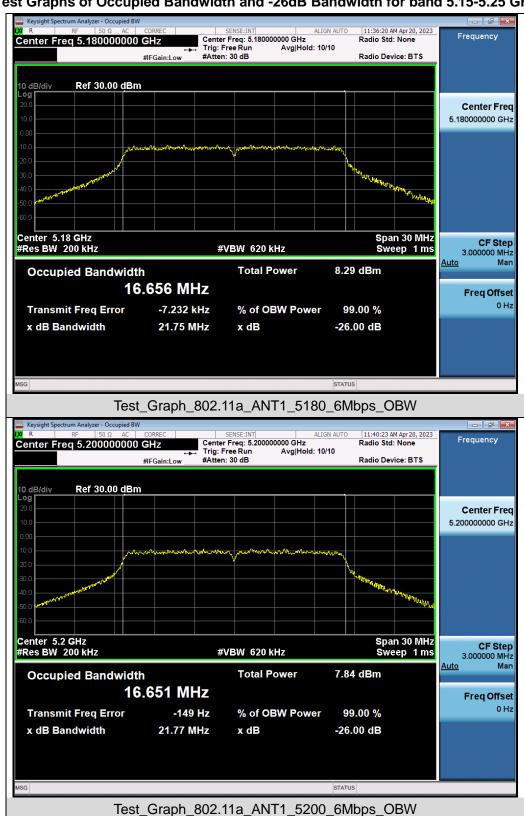







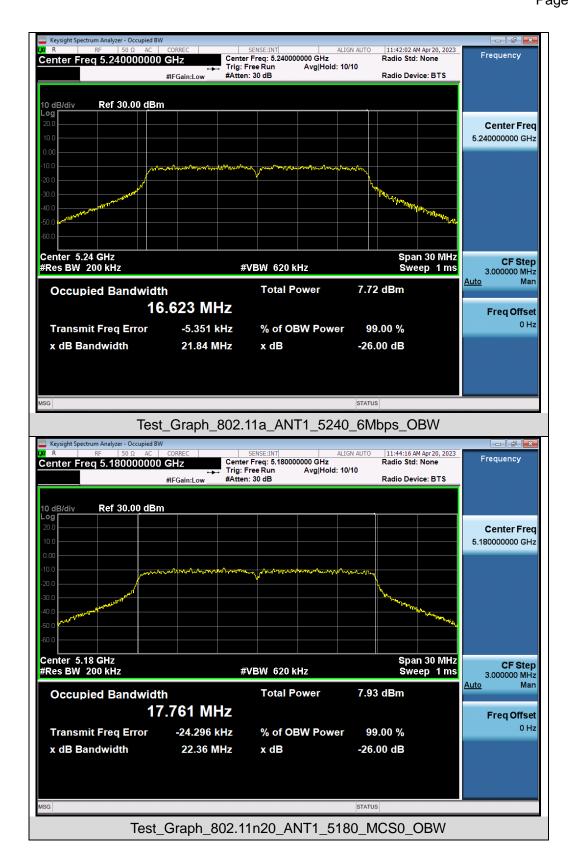







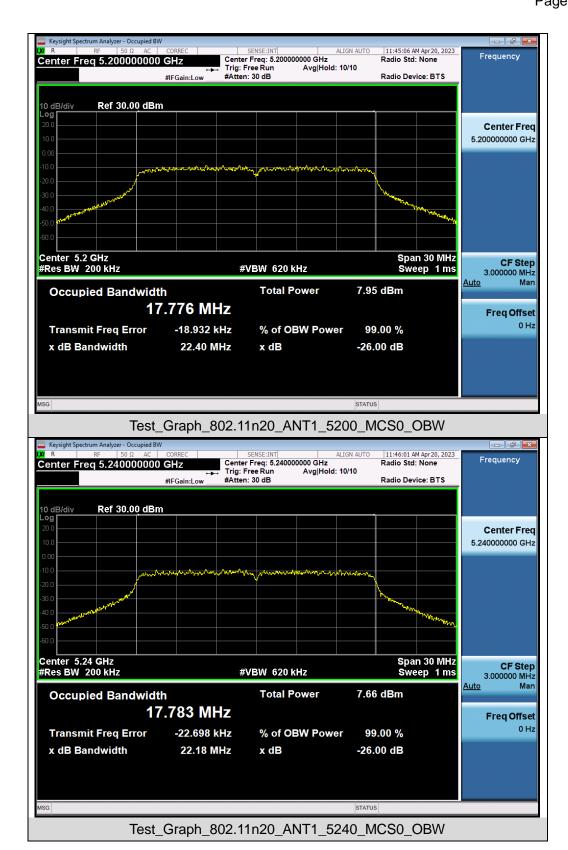







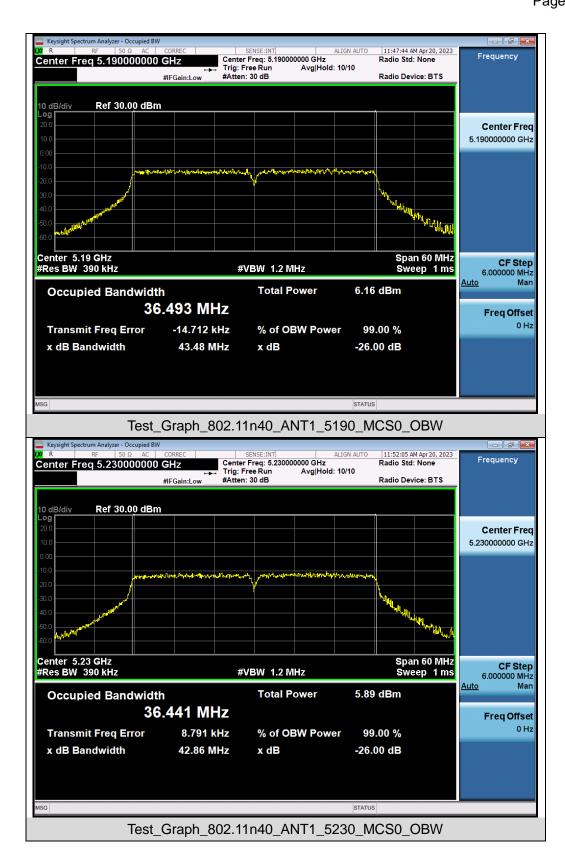






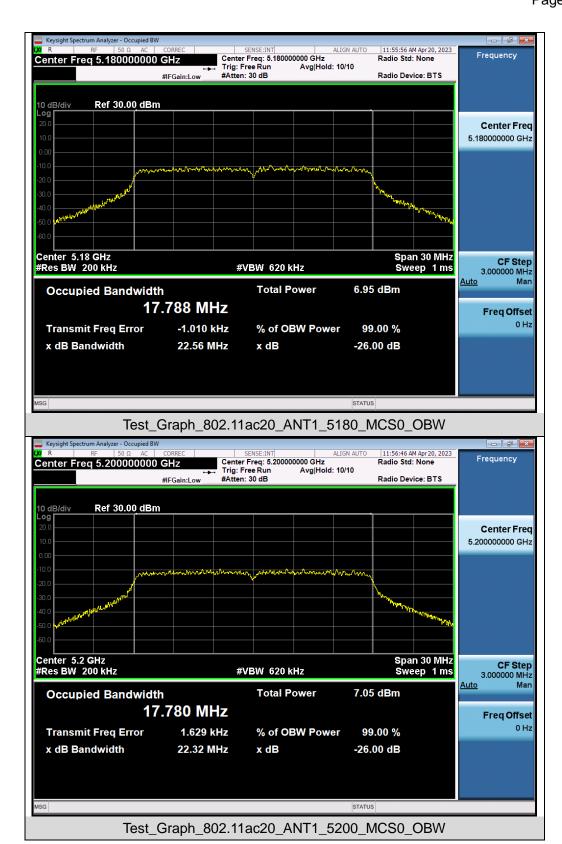















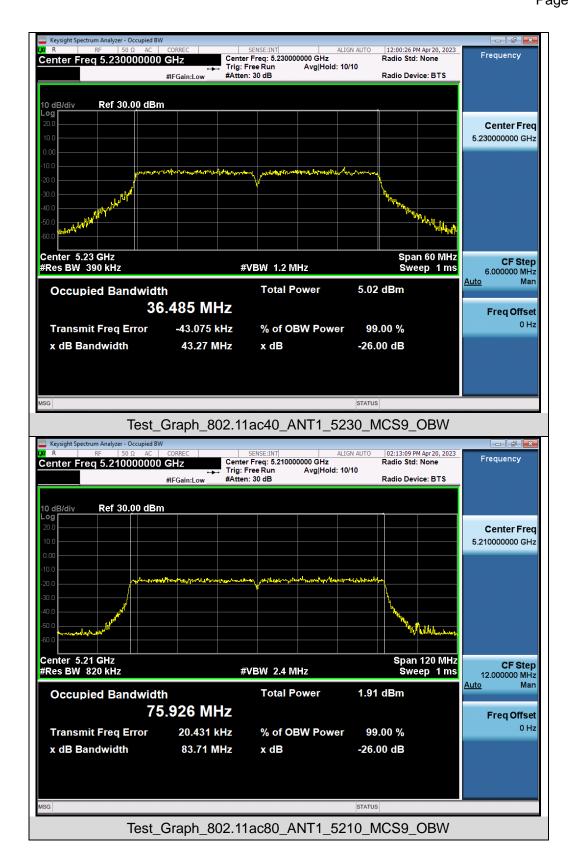







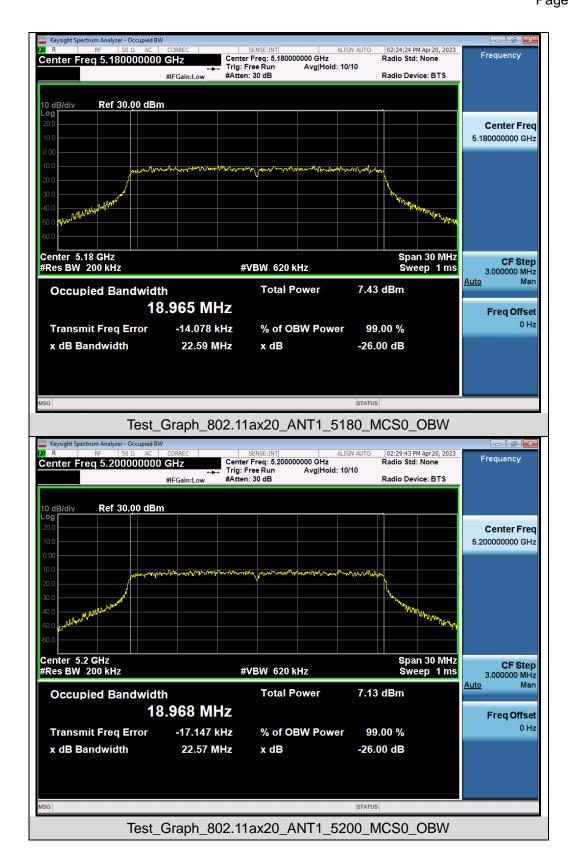







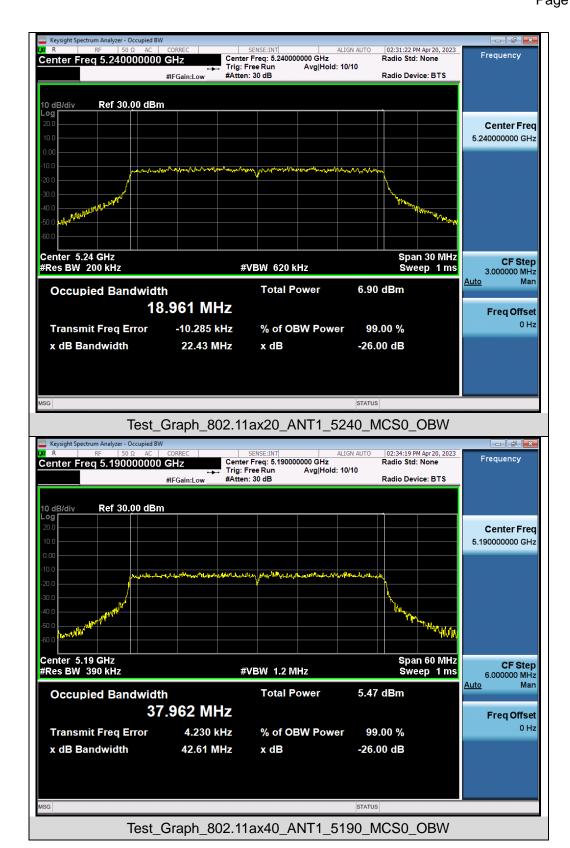







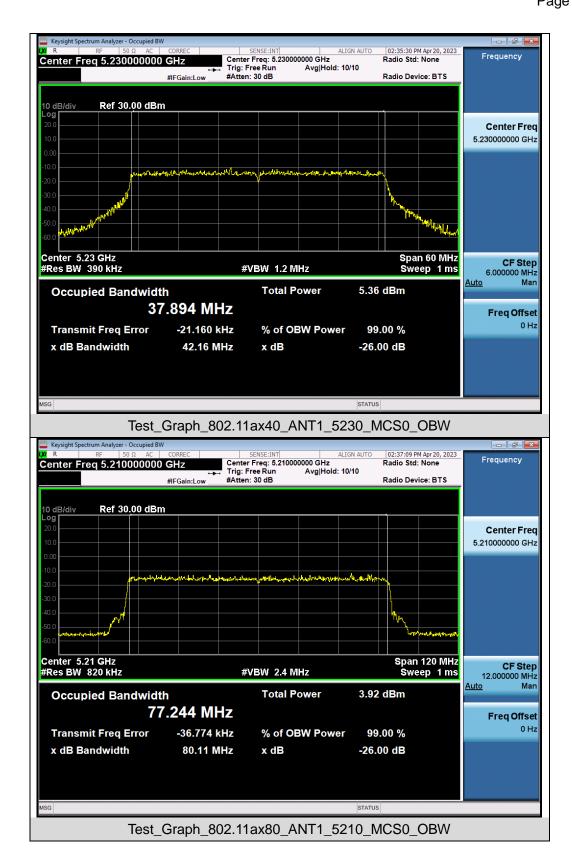







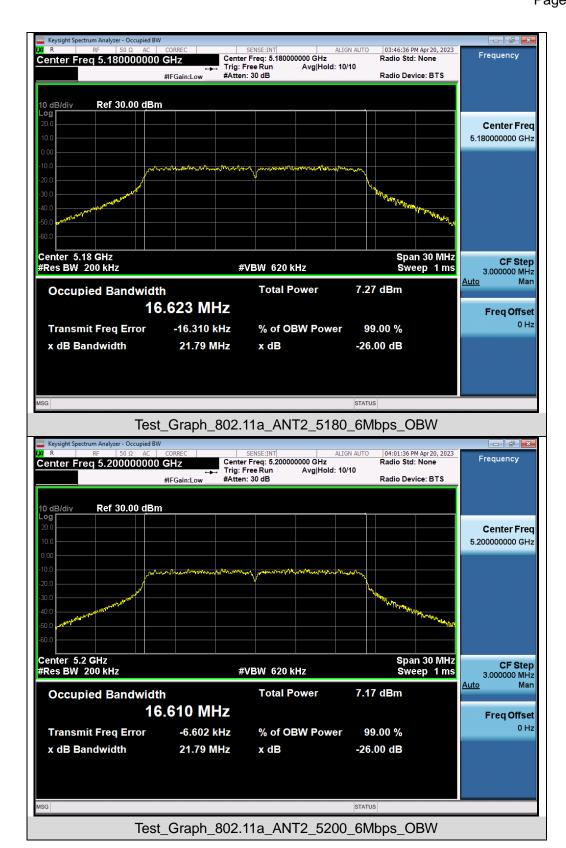







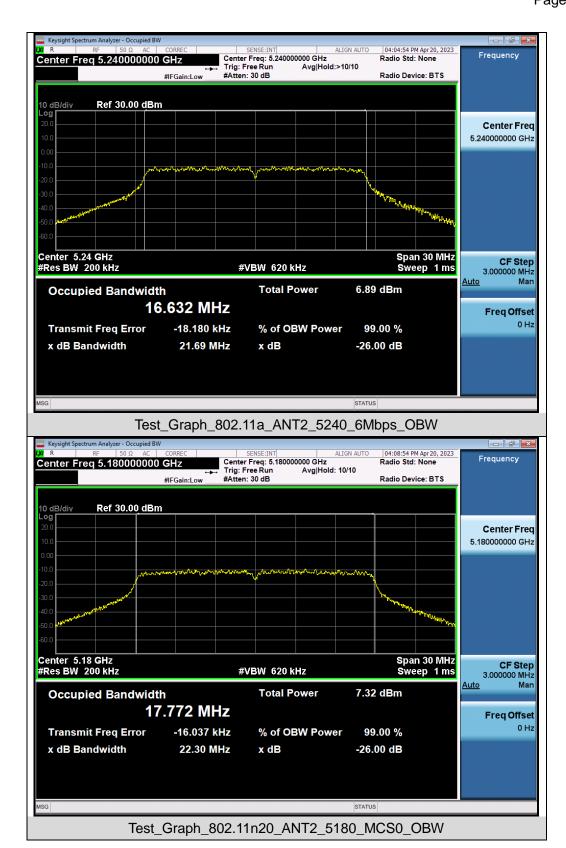







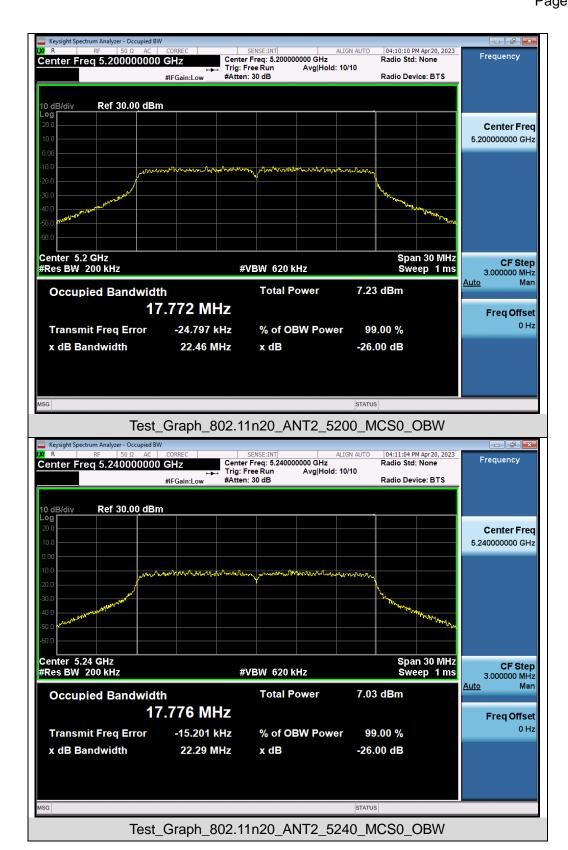







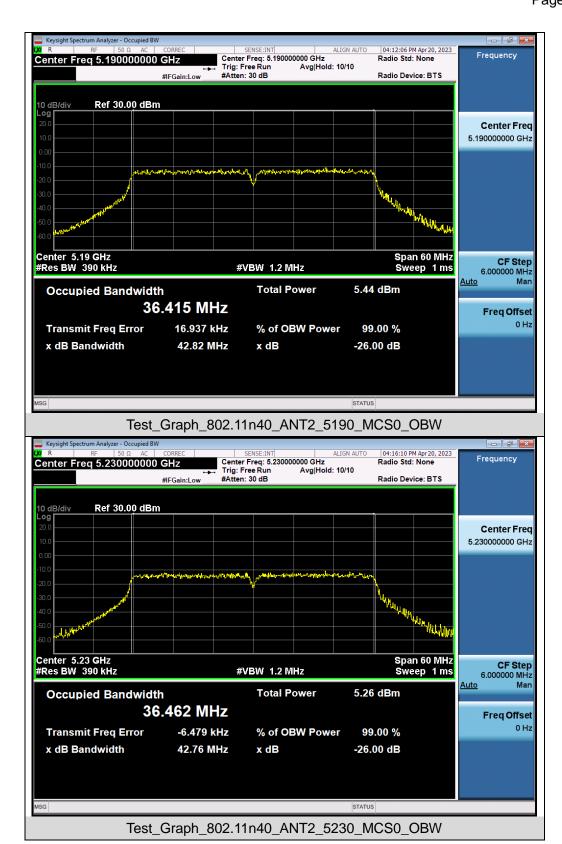







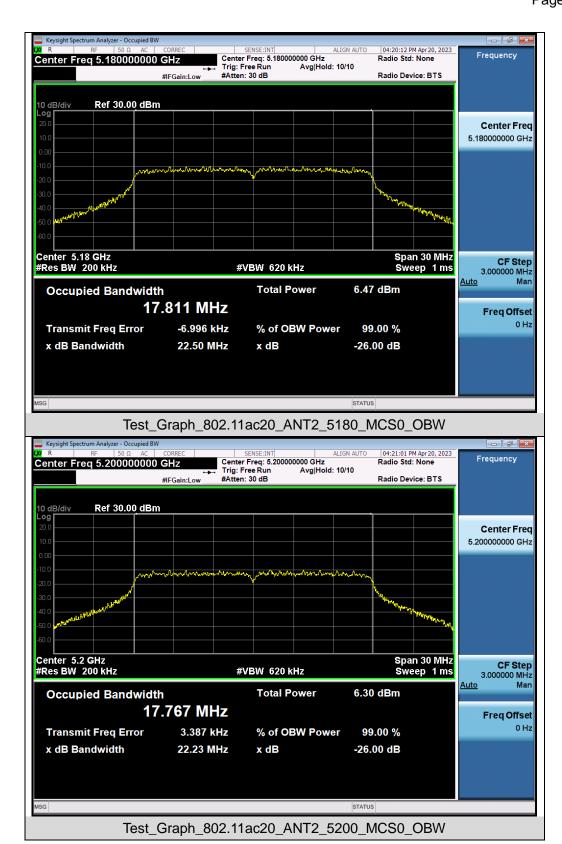







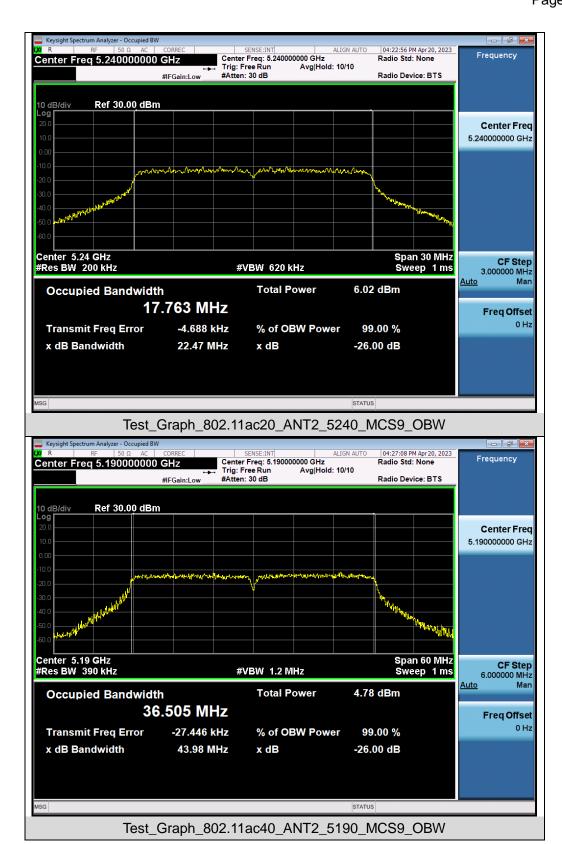







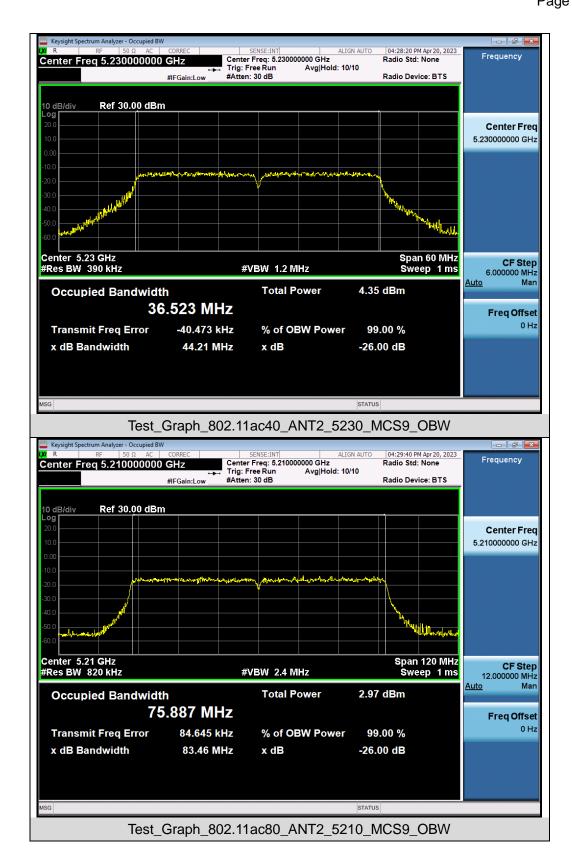







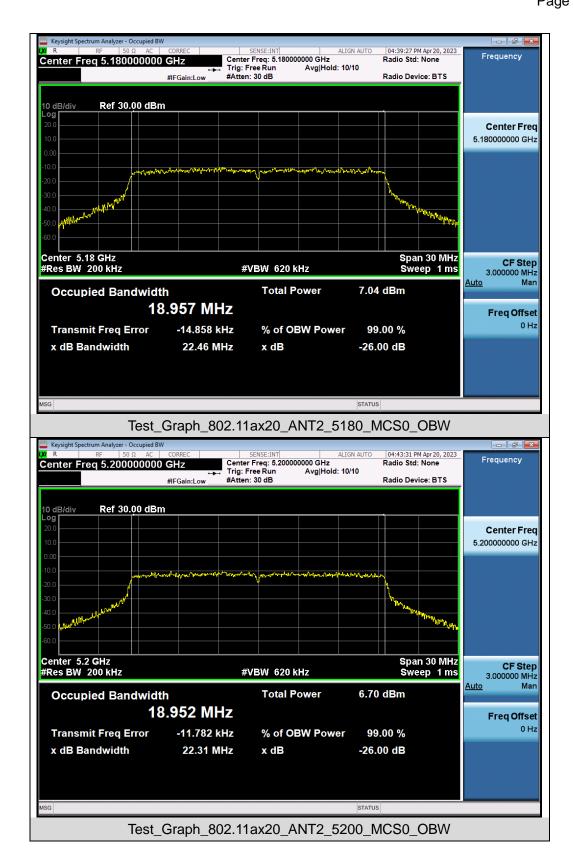







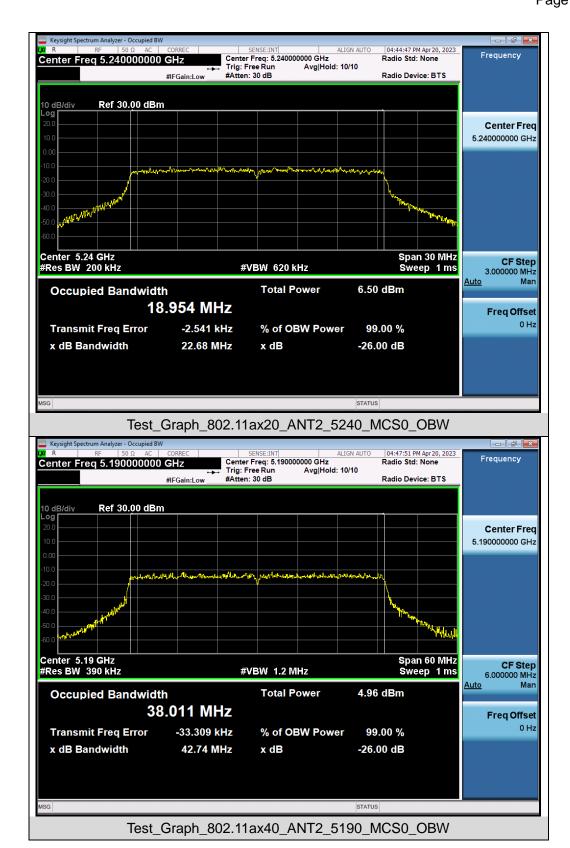





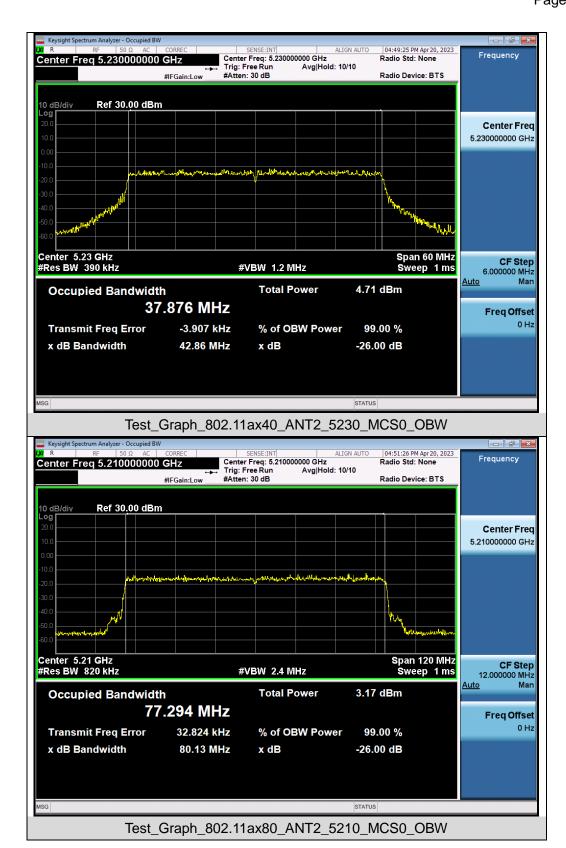





## Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.745-5.825 GHz

