



FCC PART 15.247 TEST REPORT

On Behalf of

Shenzhen Growatt New Energy Co., Ltd.

4-13/F. Building A, Sino-German(Europe) Industrial Park, Hangcheng Ave, Bao' an District,
Shenzhen, China

FCC ID: 2AAJ9-INFINITY1300P
Model: INFINITY 1300 PRO, INFINITY1200

June 4, 2024

This Report Concerns:

☒ Original Report

Equipment Type:

Portable Power Station

Test Engineer: LBi Li / LBi Li

Report Number: QCT24CR-1354E-01

Test Date: March 1, 2024 ~ June 4, 2024

Reviewed By: Gordon Tan / Gordon Tan

Approved By: Kendy Wang / Kendy Wang

Prepared By: Shenzhen QC Testing Laboratory Co., Ltd.
East of 1/F., Building E, Xinghong Science Park, No.111,
Shuiku Road, Fenghuanggang, Xixiang Street, Bao'an
District, Shenzhen, Guangdong, China
Tel: 0755-23008269
Fax: 0755-23726780





Table of Contents

1. GENERAL INFORMATION.....	5
1.1 Product Description for Equipment under Test (EUT)	5
1.2 System Test Configuration	7
1.3 Test Facility.....	8
1.4 Measurement Uncertainty	8
2. SUMMARY OF TEST RESULTS	9
3. LIST OF TEST AND MEASUREMENT INSTRUMENTS	10
3.1 Conducted Emission Test	10
3.2 Radiated Emission Test	10
3.3 RF Conducted test	11
4. ANTENNA REQUIREMENT	12
5. CONDUCTED EMISSIONS.....	13
5.1 Applicable Standard	13
5.2 Limit	13
5.3 Test setup	13
5.4 EMI Test Receiver Setup	13
5.5 Test procedure	13
5.6 Test Data	13
6. CONDUCTED PEAK OUTPUT POWER.....	18
6.1 Applicable Standard	18
6.2 Limit	18
6.3 Test setup	18
6.4 Test Data	18
7. CHANNEL BANDWIDTH & 99% OCCUPIED BANDWIDTH	20
7.1 Applicable Standard	20
7.2 Limit	20
7.3 Test setup	20
7.4 Test Procedure	20
7.5 Test Data	20
8. POWER SPECTRAL DENSITY	25
8.1 Applicable Standard	25
8.2 Limit	25
8.3 Test setup	25
8.4 Test Procedure	25
8.5 Test Data	25
9. SPURIOUS EMISSION IN NON-RESTRICTED & RESTRICTED BANDS.....	28



9.1	Conducted Emission Method	28
9.2	Radiated Emission Method	32



Report Number

Description

Issued Date

QCT24CR-1354E-01

Initial Issue

2024-6-4



1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Description:	Portable Power Station
Model No.:	INFINITY 1300 PRO, INFINITY 1200
Tested Model:	INFINITY 1300 PRO, INFINITY 1200
Sample(s) Status:	Engineer sample
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	40
Channel separation:	2MHz
Modulation type:	GFSK
Antenna Type:	PCB Print Antenna
Antenna gain*1:	3.37dBi
Power supply:	<p>Model: INFINITY 1300 PRO Input: AC Input:100-120V~,50/60Hz, 15A, 1800W MAX Vehicle Input:12-24V ---,8A MAX Solar Input:12-60V ---,800W MAX Output: AC Output(X4):120V~,50/60Hz, 1800W MAX, TOTAL 1800W (PEAK:3600W) DC Output: USB-A Fast Charge(X4):5V ---,2.4A; 9V ---,2A; 12V ---,1.5A, 18W MAX, TOTAL 72W USB-C(X2):5V/9V/12V/15V/20V ---, 5A, 100W MAX, TOTAL 200W Car Cigarette Lighter: 13.2V ---, 10A MAX DC 5521 Port(X2):13.2V ---, 3A MAX, Car Cigarette Lighter and DC 5521 Port Total 10A Max Wireless Charging: 15W Max Battery Capacity: 1382.4Wh,51.2V, 27Ah</p> <p>Model: INFINITY 1200 Input: AC Input:100-120V~,50/60Hz, 15A, 1800W MAX Vehicle Input:12-24V ---,8A MAX Solar Input:12-60V ---,600W MAX Output: AC Output(X2):120V~,50/60Hz, 1800W MAX, TOTAL 1800W (PEAK:3600W) DC Output: USB-A Fast Charge(X4):5V ---,2.4A; 9V ---,2A; 12V ---,1.5A, 18W MAX, TOTAL 72W</p>



	USB-C(X2):5V/9V/12V/15V/20V --- , 5A, 100W MAX, TOTAL 200W Car Cigarette Lighter: 13.2V --- , 10A MAX DC 5521 Port(X2):13.2V --- , 3A MAX, Car Cigarette Lighter and DC 5521 Port Total 10A Max Wireless Charging: 15W MAX Battery Capacity: 1280Wh,51.2V, 25Ah
Trade Mark:	
Applicant:	Shenzhen Growatt New Energy Co., Ltd.
Address:	4-13/F. Building A, Sino-German(Europe) Industrial Park, Hangcheng Ave, Bao' an District, Shenzhen, China
Manufacturer:	Shenzhen Growatt New Energy Co., Ltd.
Address:	4-13/F. Building A, Sino-German(Europe) Industrial Park, Hangcheng Ave, Bao' an District, Shenzhen, China
Sample No.:	Y24C1354E01WC (Model: INFINITY 1300 PRO) , Y24C1354E02WC (Model: INFINITY 1200)

Note: *1This information provided by Manufacturer, SZ QC Lab is not responsible for the accuracy of this information.

1.2 System Test Configuration

1.2.1 Channel List

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402 MHz	11	2422 MHz	21	2442 MHz	31	2462 MHz
2	2404 MHz	12	2424 MHz	22	2444 MHz	32	2464 MHz
3	2406 MHz	13	2426 MHz	23	2446 MHz	33	2466 MHz
4	2408 MHz	14	2428 MHz	24	2448 MHz	34	2468 MHz
5	2410 MHz	15	2430 MHz	25	2450 MHz	35	2470 MHz
6	2412 MHz	16	2432 MHz	26	2452 MHz	36	2472 MHz
7	2414 MHz	17	2434 MHz	27	2454 MHz	37	2474 MHz
8	2416 MHz	18	2436 MHz	28	2456 MHz	38	2476 MHz
9	2418 MHz	19	2438 MHz	29	2458 MHz	39	2478 MHz
10	2420 MHz	20	2440 MHz	30	2460 MHz	40	2480 MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

1.2.2 EUT Exercise Software

"EspRFTTestTool_v2.8_Manual" exercise software was made to the EUT tested and the power level is 10. The software and power level was provided by the applicant.

1.2.3 Support Equipment

Manufacturer	Description	Model	Serial Number
/	/	/	/

1.2.4 Test mode

Transmitting mode: Keep the EUT in continuously transmitting.

Test voltage: AC 120V/60Hz



1.3 Test Facility

Test Firm : Shenzhen QC Testing Laboratory Co., Ltd.

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS – Registration No.: L8464

The EMC Laboratory has been accredited by CNAS, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

A2LA Certificate Number: 6759.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 561109

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 29628

CAB identifier: CN0141

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

1.4 Measurement Uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 1.42 \times 10^{-4}\%$
RF output power, conducted	$\pm 1.06\text{dB}$
Power Spectral Density, conducted	$\pm 1.06\text{dB}$
Unwanted Emissions, conducted	$\pm 2.51\text{dB}$
AC Power Line Conducted Emission	$\pm 1.80\text{dB}$
Radiated Spurious Emission test (9kHz-30MHz)	$\pm 2.66\text{dB}$
Radiated Spurious Emission test (30MHz-1000MHz)	$\pm 4.04\text{dB}$
Radiated Spurious Emission test (1000MHz-18000MHz)	$\pm 4.70\text{ dB}$
Radiated Spurious Emission test (18GHz-40GHz)	$\pm 4.80\text{dB}$
Temperature	$\pm 0.8^{\circ}\text{C}$
Humidity	$\pm 3.2\%$
DC and low frequency voltages	$\pm 0.1\%$
Time	$\pm 5\%$
Duty cycle	$\pm 5\%$

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



2. Summary of Test Results

Test Item	Section	Result
Antenna Requirement	FCC part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	FCC part 15.207	Pass
Conducted Peak Output Power	FCC part 15.247 (b)(3)	Pass
Channel Bandwidth & 99% Occupied Bandwidth	FCC part 15.247 (a)(2)	Pass
Power Spectral Density	FCC part 15.247 (e)	Pass
Band Edge	FCC part 15.247(d)	Pass
Spurious Emissions	FCC part 15.205/15.209	Pass

Note: 1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013
3.. All indications of Pass/Fail in this report are opinions expressed by Shenzhen QC Testing Laboratory Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.



3. List of Test and Measurement Instruments

3.1 Conducted Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1	EMI Test Receiver	R&S	ESIB 7	2277573376	2024.03.14	2025.03.13
2	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101820	2023.08.21	2024.08.20
3	Artificial Mains Network	SCHWARZBECK	NSLK8126	8126200	2024.03.14	2025.03.13
4	PULSE LIMITER	R&S	ESH3-Z2	100058	2024.03.14	2025.03.13

Conducted Emission Measurement Software: TS

3.2 Radiated Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1.	Spectrum Analyzer	ROHDE&SCHWARZ	FSV 40	101458	2024.03.14	2025.03.13
2.	Loop Antenna	EMCO	6502	2133	2022.07.23	2024.07.22
3.	Logarithmic compound broadband Antenna	SCKWARZBECK	VULB9168	VULB9168-1-588	2023.04.01	2025.03.31
4.	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB 7	2277573376	2024.03.14	2025.03.13
5.	EMI Test Receiver	R&S	ESPI	101131	2024.03.14	2025.03.13
6.	Horn Antenna	SCHWARZBECK	BBHA9120D	02069	2023.04.01	2025.03.31
7.	Horn Antenna	COM-MW	ZLB7-18-40G-950	12221225	2023.01.12	2025.01.09
8.	Amplifier	R&S	BBV9721	9721-031	2024.03.14	2025.03.13
9.	Amplifier	MITEQ	TTA1800-30-H G	2063644	2024.03.30	2025.03.29
10.	Pre-amplifier	COM-MW	DLAN-18000-40000-02	10229104	2024.03.14	2025.03.13
11.	966 Chamber	ZhongYu Electron	9*6*6	/	2022.07.25	2025.07.24

Radiated Emission Measurement Software: EZ_EMC



3.3 RF Conducted test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1.	Wideband Radio Communication Tester	Rohde & Schwarz	CW500	151583	2024.03.14	2025.03.13
2.	Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40	101458	2024.03.14	2025.03.13
3.	Signal Generator	Agilent	N5182A	MY50141563	2024.03.14	2025.03.13
4.	RF Automatic Test System	MW	MW100-RFCB/ MW100-PSB	MW2007004	2024.03.14	2025.03.13
RF Conducted Measurement Software: MTS 8310						



4. Antenna requirement

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

EUT Antenna: The Ant is PCB Print Antenna, the best case gain of the antenna is 3.37dBi, reference to the Internal photo for details.

5. Conducted Emissions

5.1 Applicable Standard


FCC Part15 C Section 15.207

5.2 Limit

Frequency range (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

Note *: The level decreases linearly with the logarithm of the frequency.

5.3 Test setup

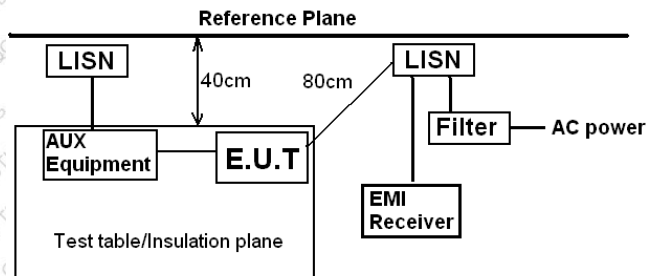

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

5.4 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.
RBW=9 kHz, VBW=30 kHz, Sweep time=auto

5.5 Test procedure

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

5.6 Test Data

Temperature	23 °C	Humidity	52%
ATM Pressure	101.1kPa	Antenna Gain	3.37dBi
Test by	LBi Li	Test result	PASS


Test voltage: AC 120V/60Hz



Measurement data:

Pre-scan all test modes, found worst case at GFSK 2402MHz, and so only show the test result of GFSK 2402MHz


Line: (Model: INFINITY 1300 PRO)

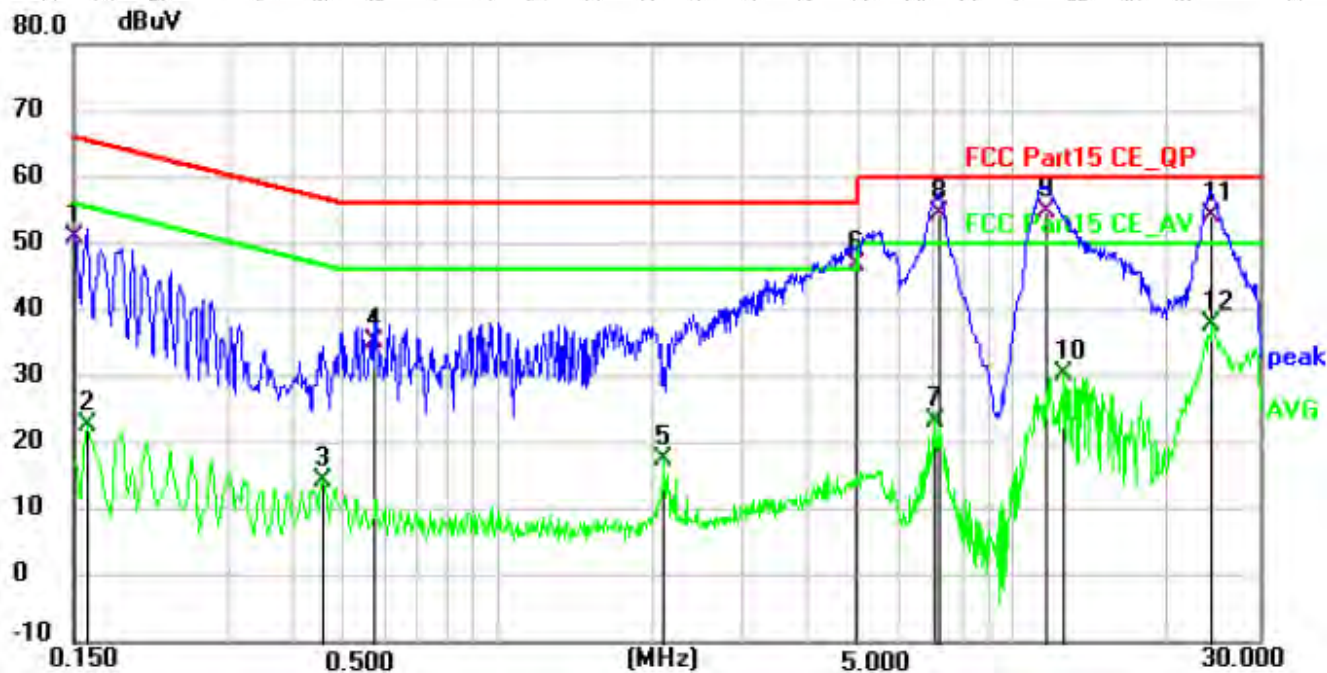

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	40.82	10.04	50.86	66.00	-15.14	QP	P
2	0.1590	12.61	10.08	22.69	55.52	-32.83	AVG	P
3	0.4560	4.12	10.21	14.33	46.77	-32.44	AVG	P
4	0.5775	24.87	10.30	35.17	56.00	-20.83	QP	P
5	2.1030	7.22	10.23	17.45	46.00	-28.55	AVG	P
6	4.9603	36.42	10.32	46.74	56.00	-9.26	QP	P
7	7.0890	13.06	10.24	23.30	50.00	-26.70	AVG	P
8	7.2330	44.35	10.25	54.60	60.00	-5.40	QP	P
9 *	11.6022	44.39	10.39	54.78	60.00	-5.22	QP	P
10	12.5160	19.83	10.42	30.25	50.00	-19.75	AVG	P
11	24.3733	43.50	10.55	54.05	60.00	-5.95	QP	P
12	24.3733	27.20	10.55	37.75	50.00	-12.25	AVG	P




Neutral: (Model: INFINITY 1300 PRO)

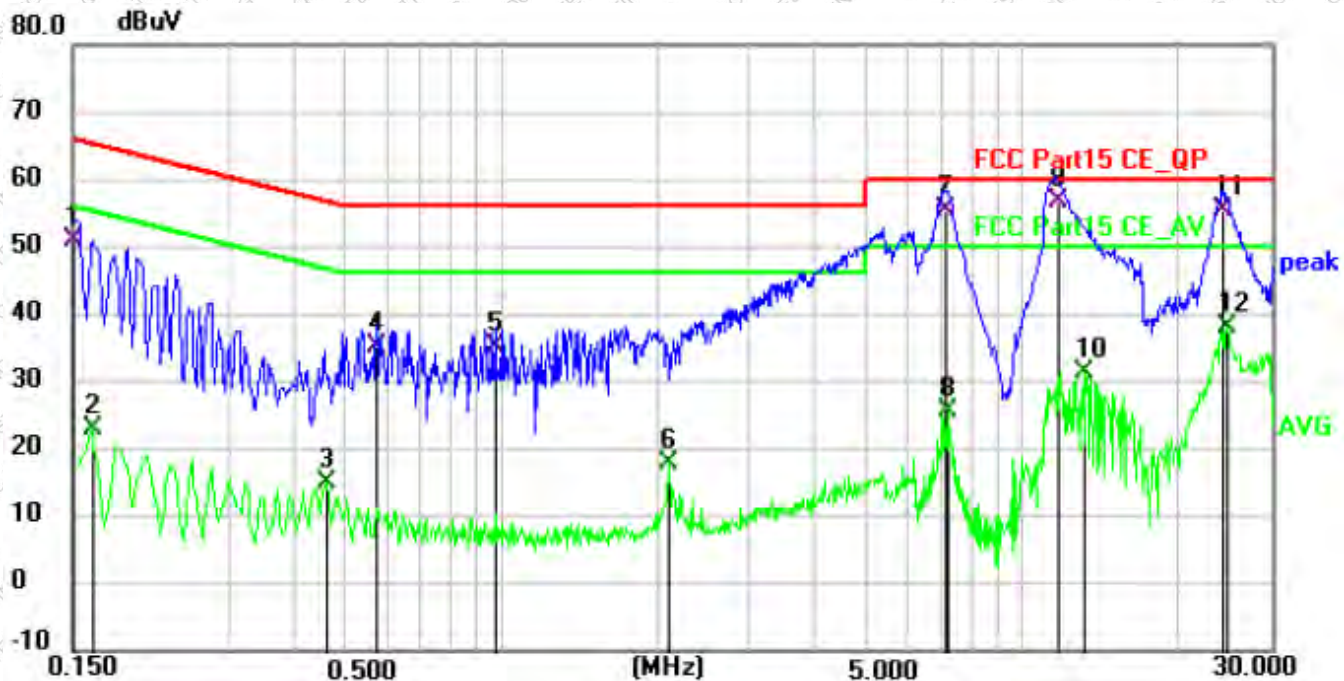

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	40.96	10.02	50.98	66.00	-15.02	QP	P
2	0.1635	12.82	10.10	22.92	55.28	-32.36	AVG	P
3	0.4605	4.40	10.38	14.78	46.68	-31.90	AVG	P
4	0.5775	25.02	10.30	35.32	56.00	-20.68	QP	P
5	0.9690	25.04	10.00	35.04	56.00	-20.96	QP	P
6	2.1030	7.64	10.27	17.91	46.00	-28.09	AVG	P
7	7.1383	45.11	10.17	55.28	60.00	-4.72	QP	P
8	7.1880	15.41	10.18	25.59	50.00	-24.41	AVG	P
9 *	11.7735	46.23	10.43	56.66	60.00	-3.34	QP	P
10	13.1550	20.80	10.47	31.27	50.00	-18.73	AVG	P
11	24.2835	44.82	10.56	55.38	60.00	-4.62	QP	P
12	24.6705	27.39	10.55	37.94	50.00	-12.06	AVG	P




Line: (Model: INFINITY 1200)

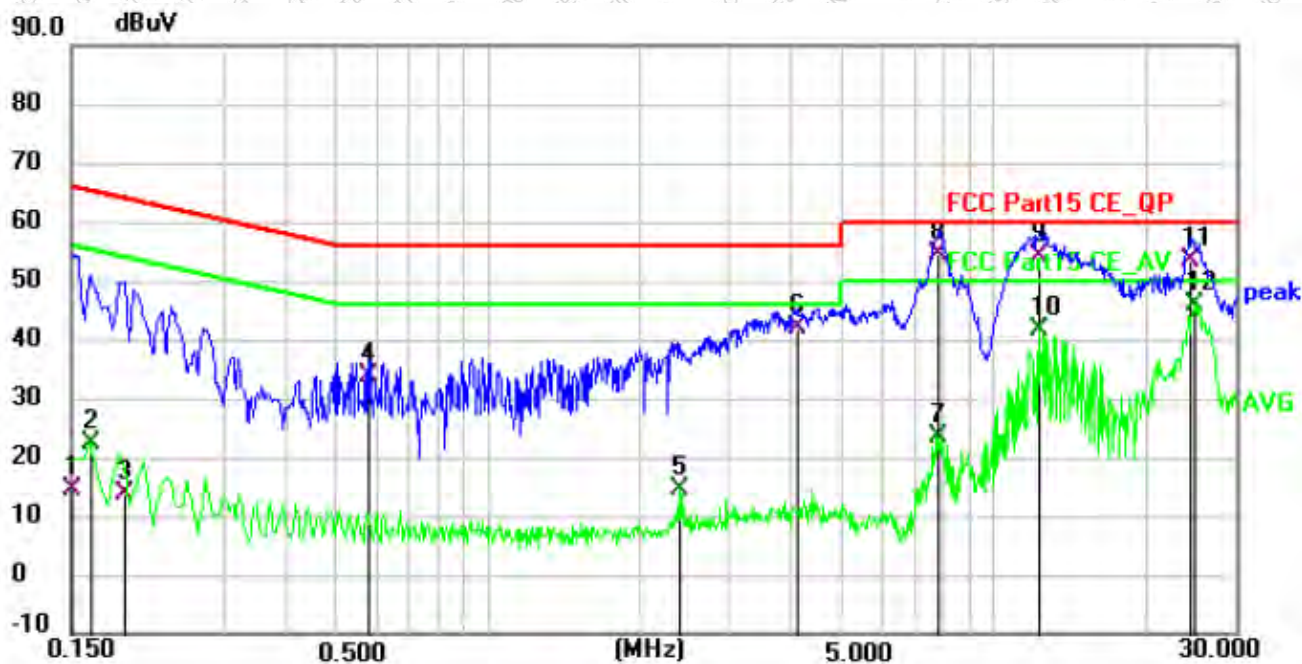

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	4.37	10.04	14.41	66.00	-51.59	QP	P
2	0.1635	12.34	10.10	22.44	55.28	-32.84	AVG	P
3	0.1905	3.66	10.21	13.87	64.01	-50.14	QP	P
4	0.5820	23.36	10.30	33.66	56.00	-22.34	QP	P
5	2.4045	4.14	10.27	14.41	46.00	-31.59	AVG	P
6	4.0875	31.79	10.33	42.12	56.00	-13.88	QP	P
7	7.7640	13.22	10.27	23.49	50.00	-26.51	AVG	P
8	7.8000	44.14	10.27	54.41	60.00	-5.59	QP	P
9	12.2682	43.57	10.41	53.98	60.00	-6.02	QP	P
10	12.3810	31.15	10.41	41.56	50.00	-8.44	AVG	P
11	24.4361	42.85	10.55	53.40	60.00	-6.60	QP	P
12 *	24.9180	35.28	10.55	45.83	50.00	-4.17	AVG	P



Neutral: (Model: INFINITY 1200)

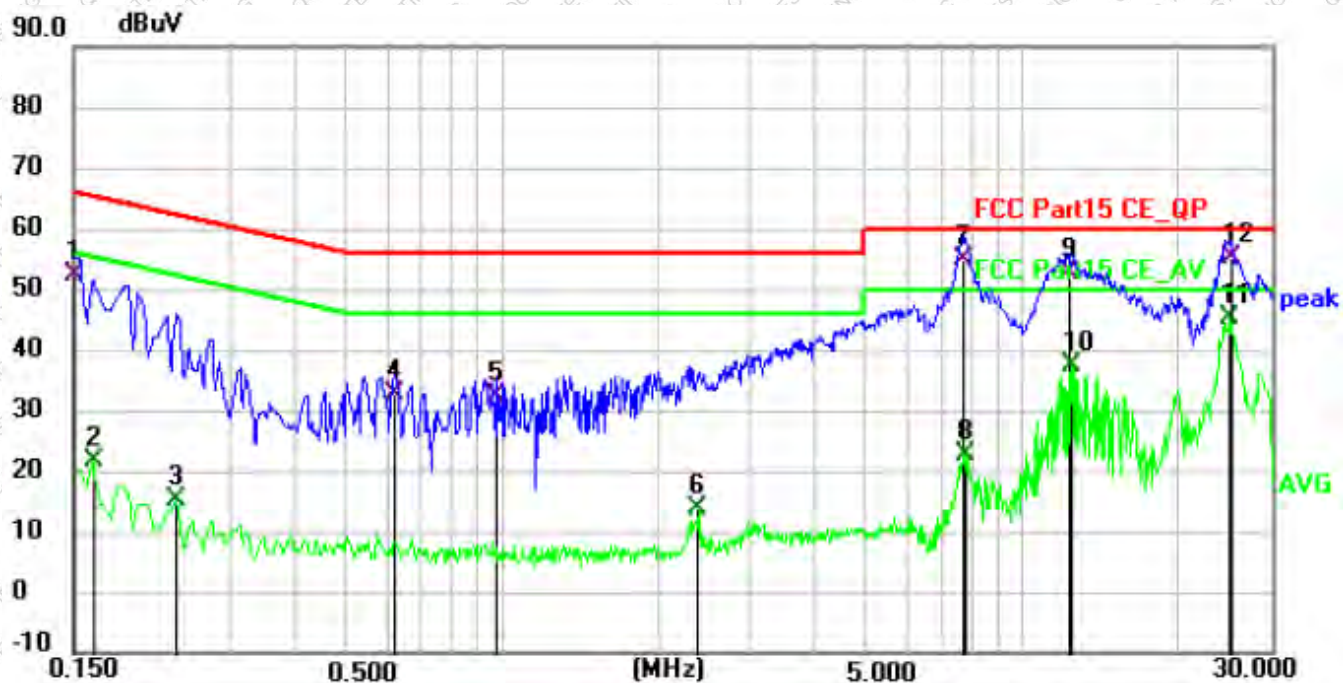

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	42.16	10.02	52.18	66.00	-13.82	QP	P
2	0.1635	11.53	10.10	21.63	55.28	-33.65	AVG	P
3	0.2353	4.69	10.35	15.04	52.26	-37.22	AVG	P
4	0.6225	22.52	10.28	32.80	56.00	-23.20	QP	P
5	0.9690	22.36	10.00	32.36	56.00	-23.64	QP	P
6	2.3909	3.41	10.28	13.69	46.00	-32.31	AVG	P
7	7.7190	44.74	10.22	54.96	60.00	-5.04	QP	P
8	7.7640	12.49	10.22	22.71	50.00	-27.29	AVG	P
9	12.3673	42.37	10.44	52.81	60.00	-7.19	QP	P
10	12.4123	26.87	10.44	37.31	50.00	-12.69	AVG	P
11	25.0260	34.48	10.56	45.04	50.00	-4.96	AVG	P
12 *	25.3140	44.62	10.56	55.18	60.00	-4.82	QP	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

6. Conducted Peak Output Power

6.1 Applicable Standard


FCC Part15 C Section 15.247 (b)(3)

6.2 Limit

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

6.3 Test setup

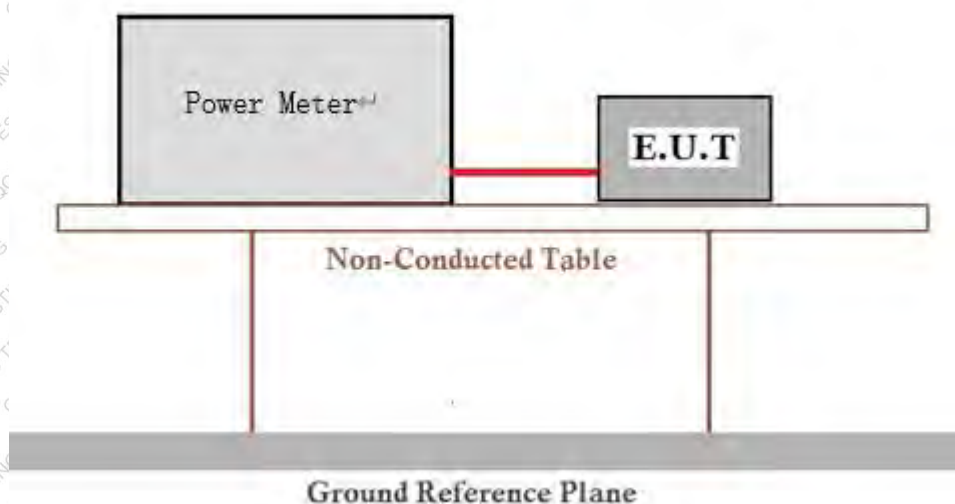

6.4 Test Data

Temperature	22 °C	Humidity	52 %
ATM Pressure	101.1kPa	Antenna Gain	3.37dBi
Test by	LBi Li	Test result	PASS

Please refer to following table and plots.



Output Power:

Modulation	CH No.	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Verdict
BLE	Lowest	2402	4.51	≤30	PASS
	Middle	2440	3.7	≤30	PASS
	Highest	2480	3.53	≤30	PASS

7. Channel Bandwidth & 99% Occupied Bandwidth


7.1 Applicable Standard

FCC Part15 C Section 15.247 (a)(2)

7.2 Limit

The minimum 6 dB bandwidth shall be 500 kHz.

7.3 Test setup

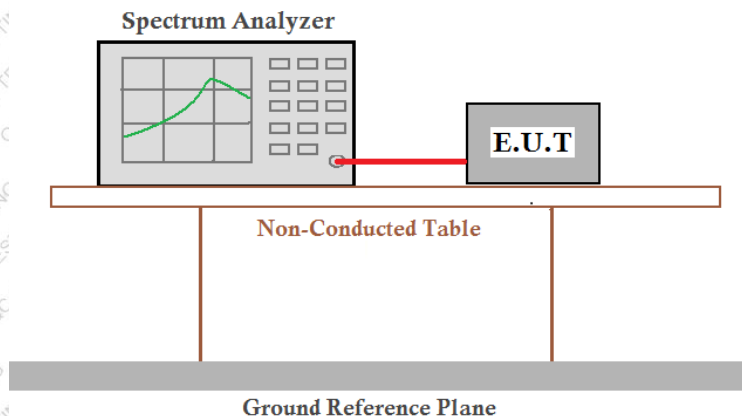

7.4 Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to "Sample". However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or "Max Hold") may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

7.5 Test Data

Temperature	22 °C	Humidity	52 %
ATM Pressure	101.1kPa	Antenna Gain	3.37dBi
Test by	LBi Li	Test result	PASS

Please refer to following table and plots.



DTS Bandwidth:

Modulation	CH No.	Frequency (MHz)	DTS Bandwidth (MHz)	Limit (MHz)	Verdict
BLE	Lowest	2402	0.631	0.5	PASS
	Middle	2440	0.636	0.5	PASS
	Highest	2480	0.625	0.5	PASS


99% Occupied Bandwidth:

Modulation	CH No.	Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Verdict
BLE	Lowest	2402	1.07	---	PASS
	Middle	2440	1.07	---	PASS
	Highest	2480	1.074	---	PASS




DTS Bandwidth:

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

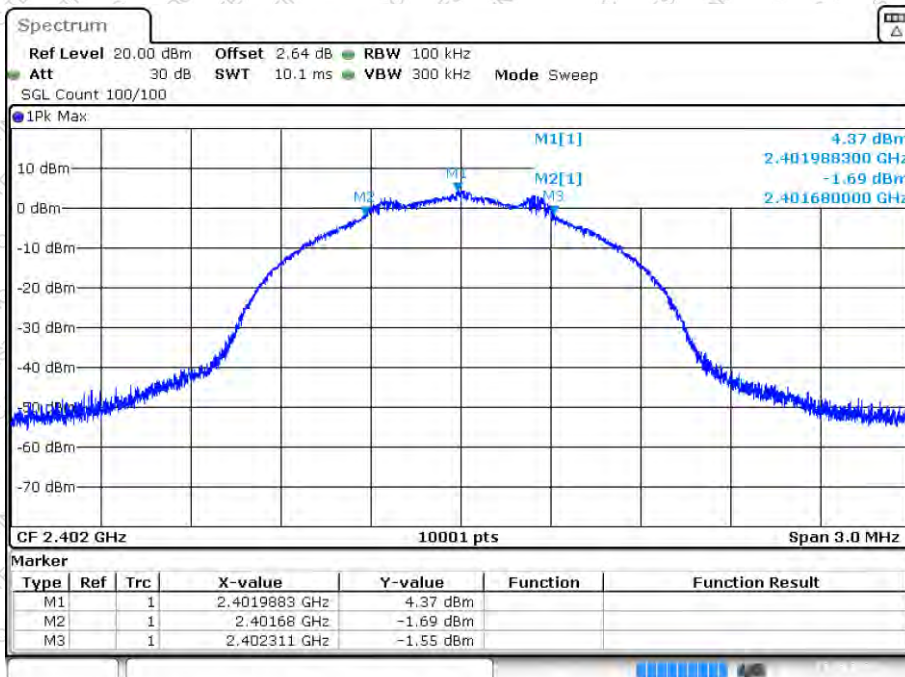


-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

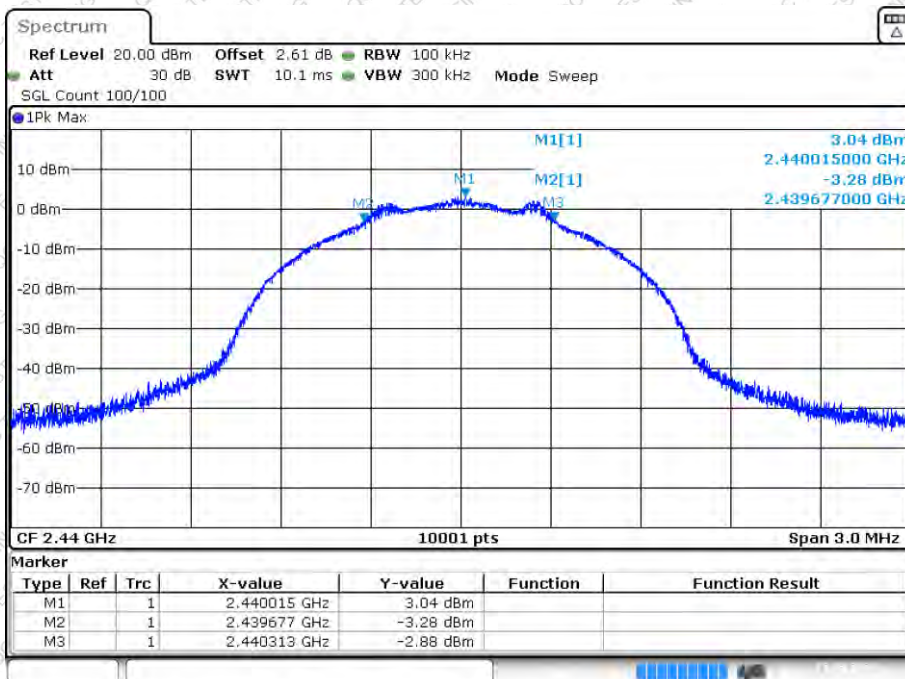




-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

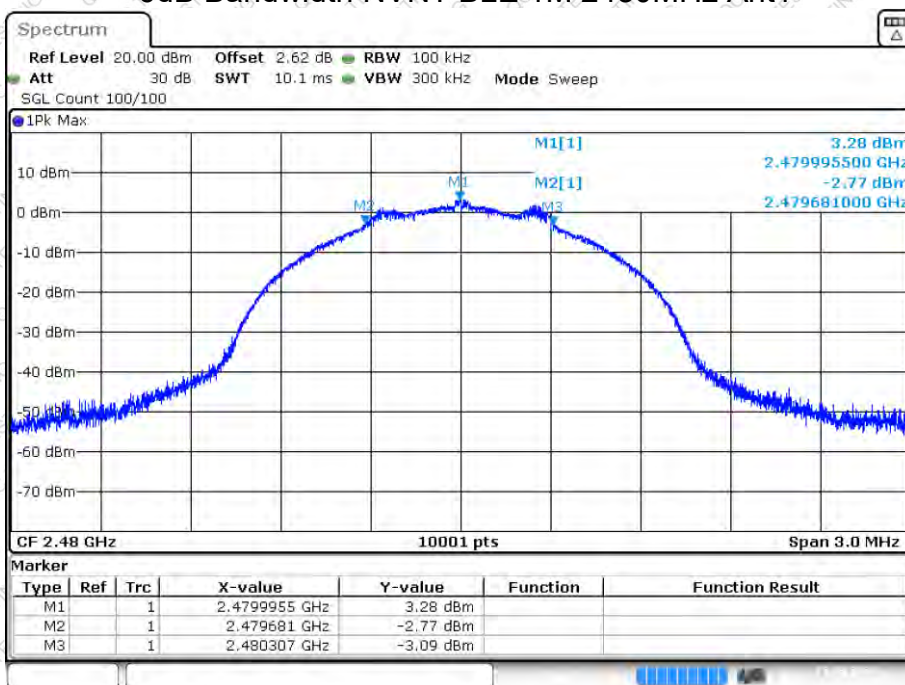

Date: 15. MAR 2024 16:22:13

99% Occupied Bandwidth:


OBW NVNT BLE 1M 2402MHz Ant1

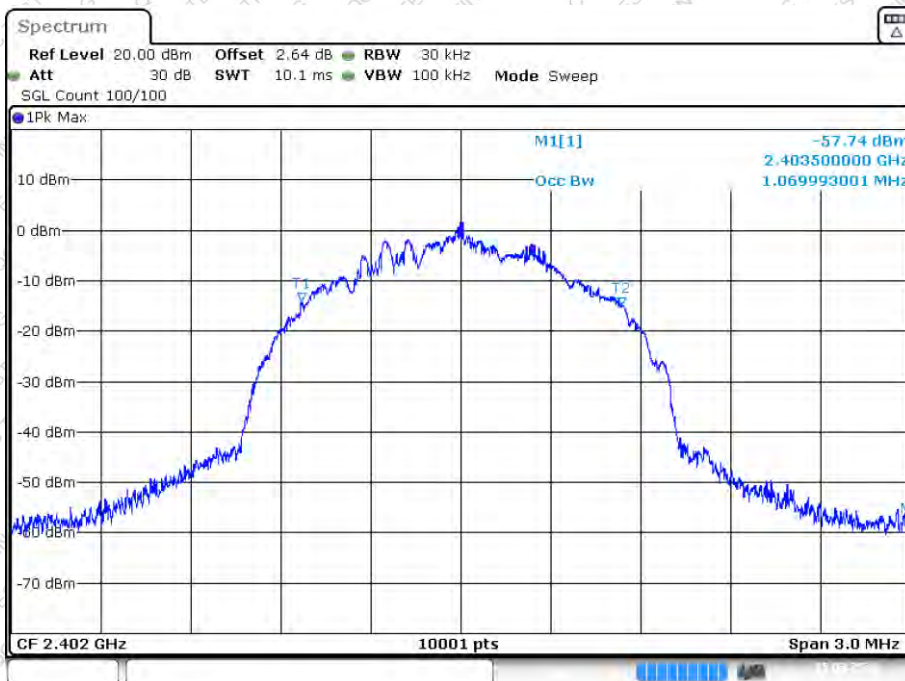

Date: 15. MAR 2024 16:19:54




OBW NVNT BLE 1M 2440MHz Ant1

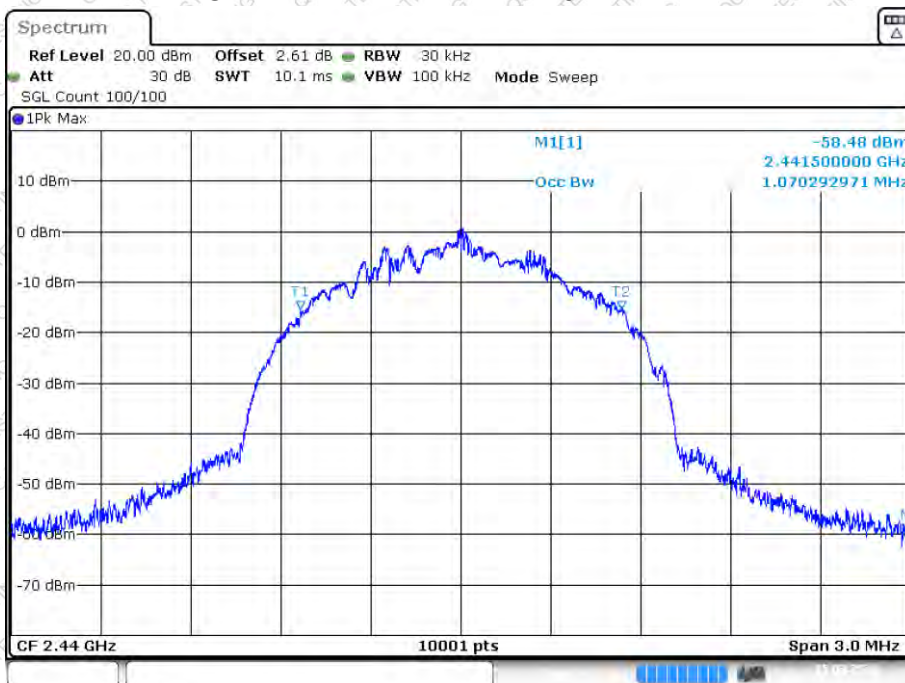

Date: 15. MAR 2024 16:21:05

OBW NVNT BLE 1M 2480MHz Ant1

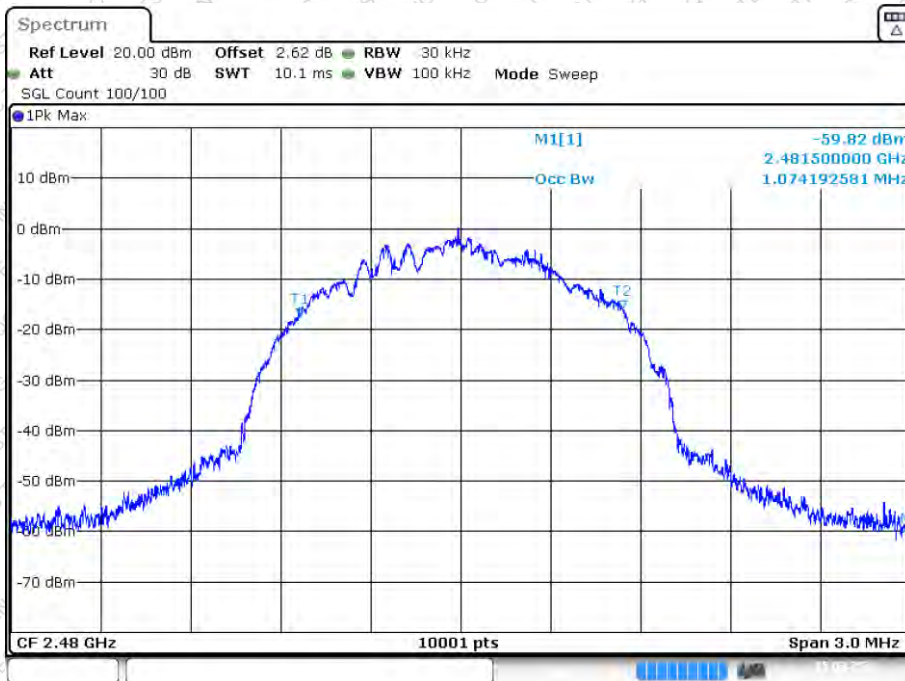

Date: 15. MAR 2024 16:22:07

8. Power Spectral Density


8.1 Applicable Standard

FCC Part15 C Section 15.247 (e)

8.2 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

8.3 Test setup

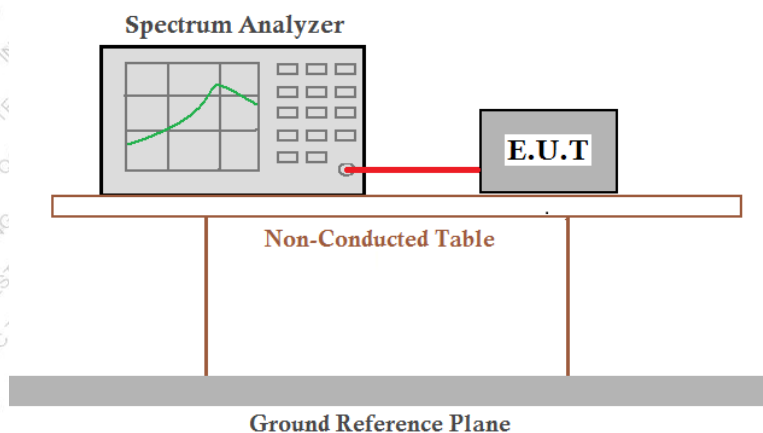

8.4 Test Procedure

Refer to KDB558074 D01 15.247 Meas Guidance v05r02

8.5 Test Data


Temperature	22 °C	Humidity	52 %
ATM Pressure	101.1kPa	Antenna Gain	3.37dBi
Test by	LBi Li	Test result	PASS

Please refer to following table and plots.

Modulation	Test channel	Power Spectral Density (dBm/3kHz)	Limit(dBm/3kHz)	Result
BLE	Lowest	-10.97	8.00	Pass
	Middle	-12.12		
	Highest	-12.29		




PSD NVNT BLE 1M 2402MHz Ant1

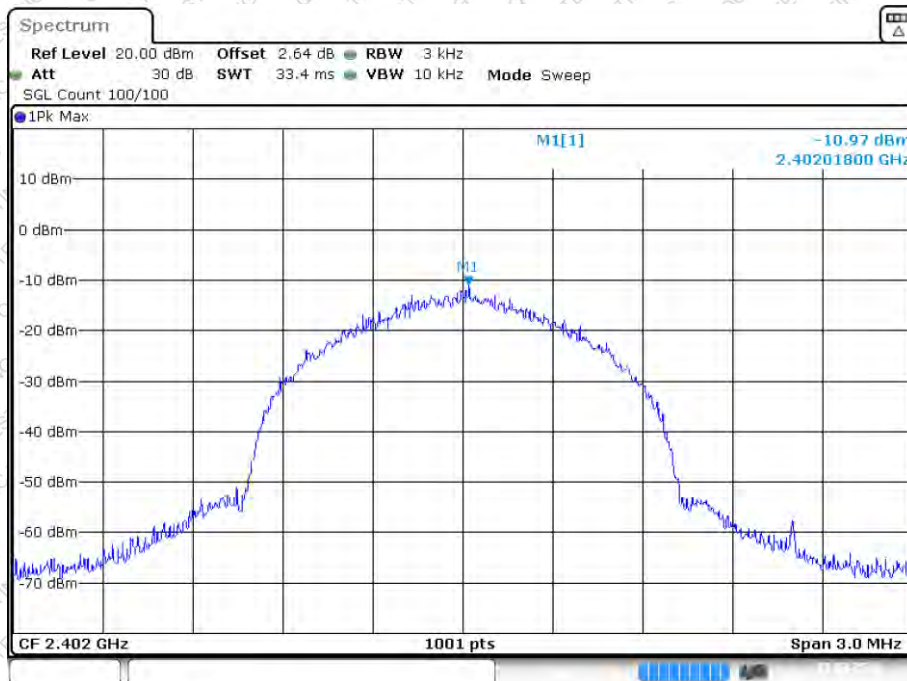

Date: 15.MAR.2024 16:20:09


PSD NVNT BLE 1M 2440MHz Ant1

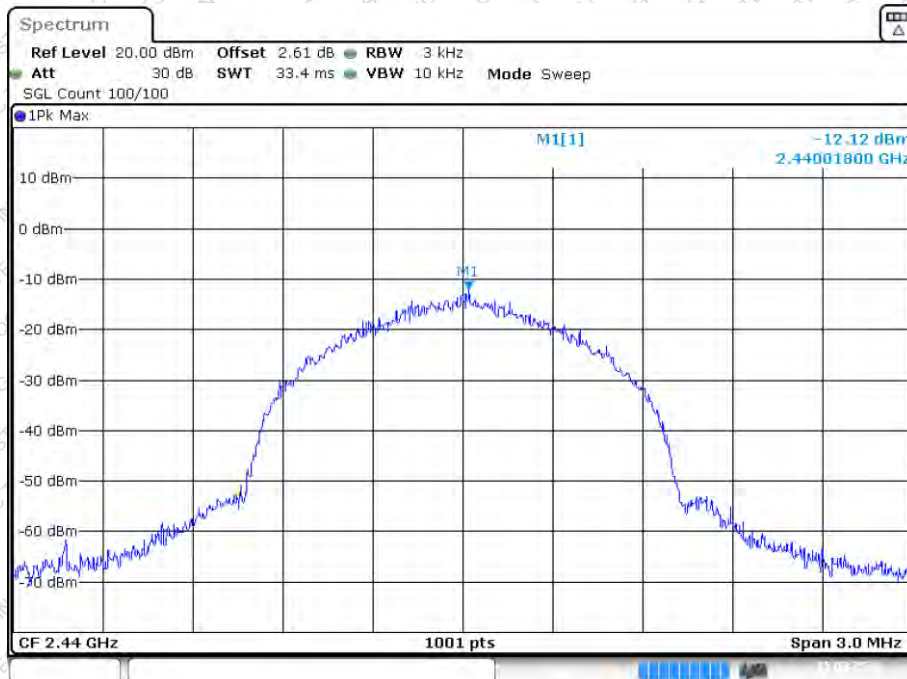

Date: 15.MAR.2024 16:21:21



PSD NVNT BLE 1M 2480MHz Ant1

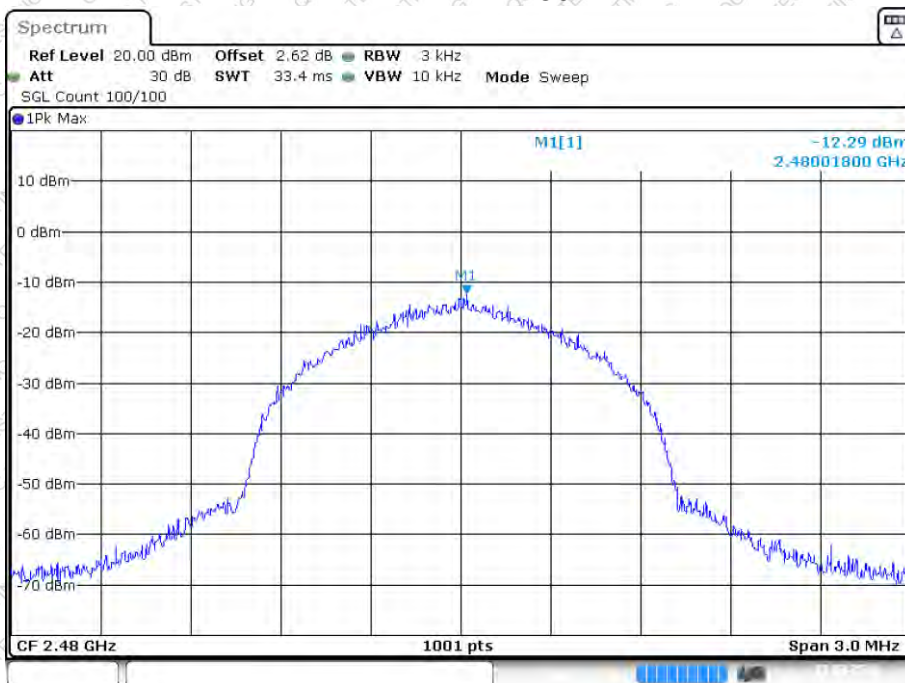

Date: 15.MAR.2024 16:22:23

9. Spurious Emission in Non-restricted & restricted Bands

9.1 Conducted Emission Method


9.1.1 Applicable Standard

FCC Part15 C Section 15.247 (d)

9.1.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

9.1.3 Test setup

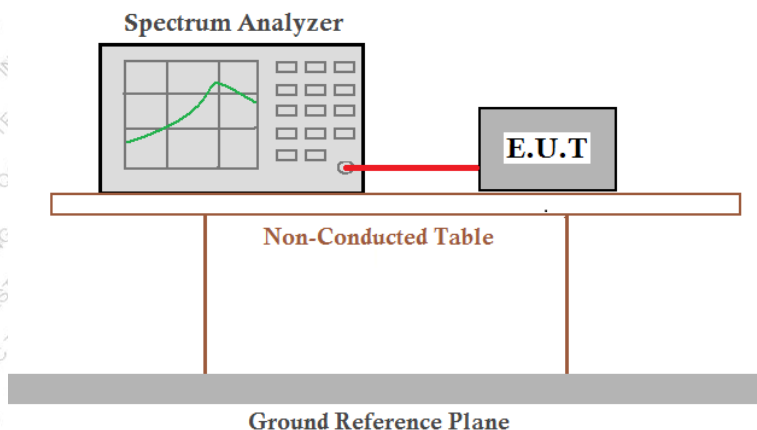

9.1.4 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- Repeat above procedures until all measured frequencies were complete.


9.1.5 Test Data

Temperature	22 °C	Humidity	52 %
ATM Pressure	101.1kPa	Antenna Gain	3.37dBi
Test by	LBi Li	Test result	PASS

Please refer to following plots.




Band Edge NVNT BLE 2402MHz Ant1 Emission

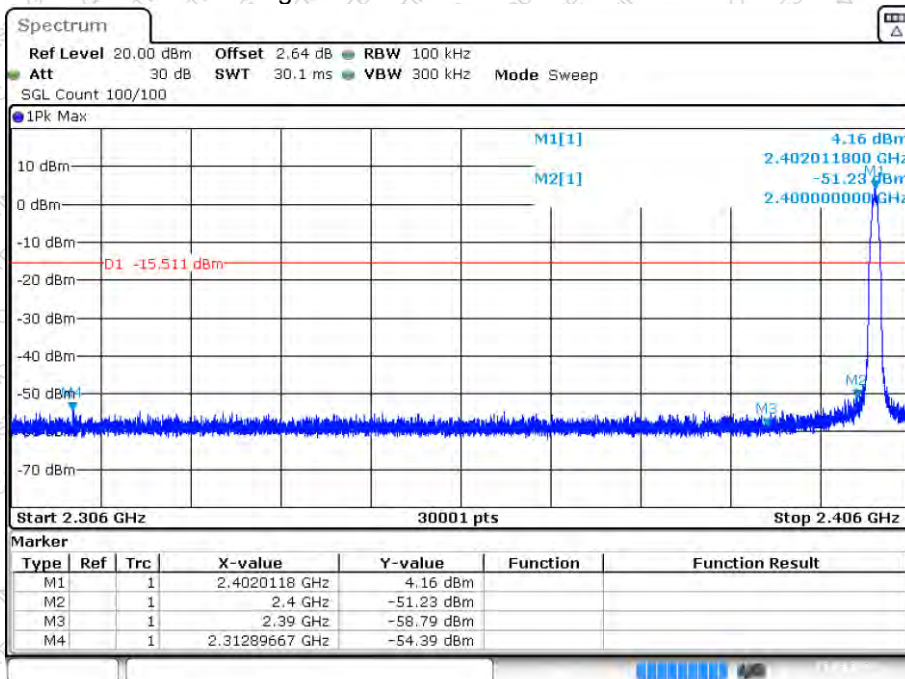

Date: 15.MAR.2024 16:20:22


Band Edge NVNT BLE 2480MHz Ant1 Emission

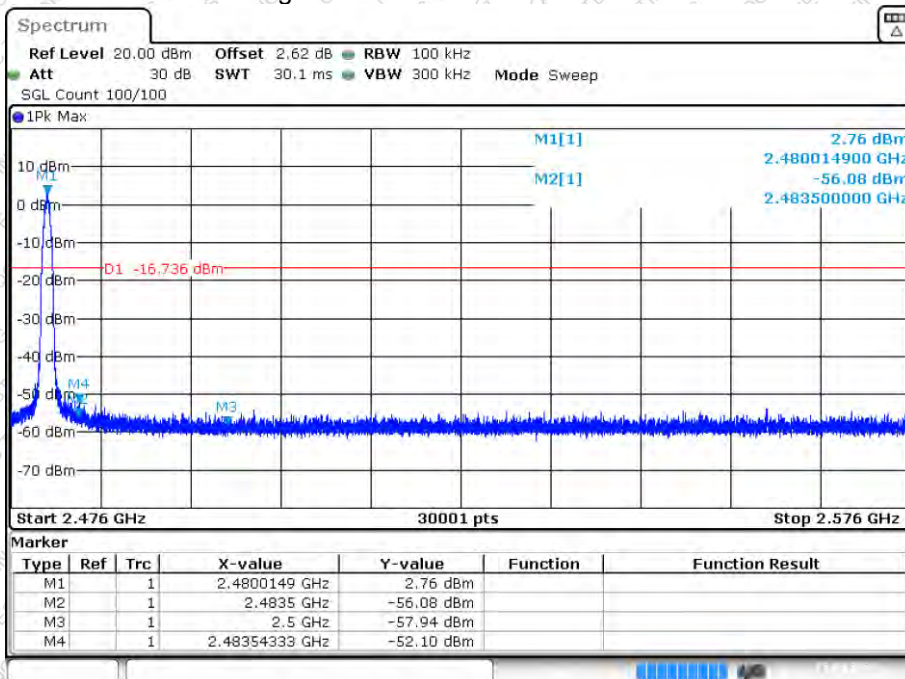

Date: 15.MAR.2024 16:22:36




Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

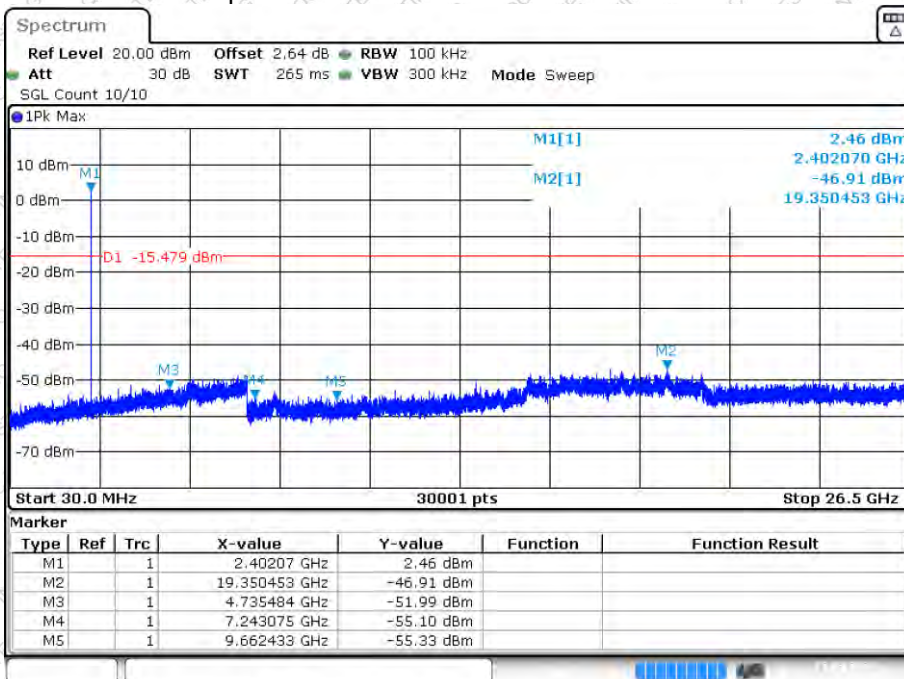

Date: 15.MAR.2024 16:20:42


Tx. Spurious NVNT BLE 2440MHz Ant1 Emission

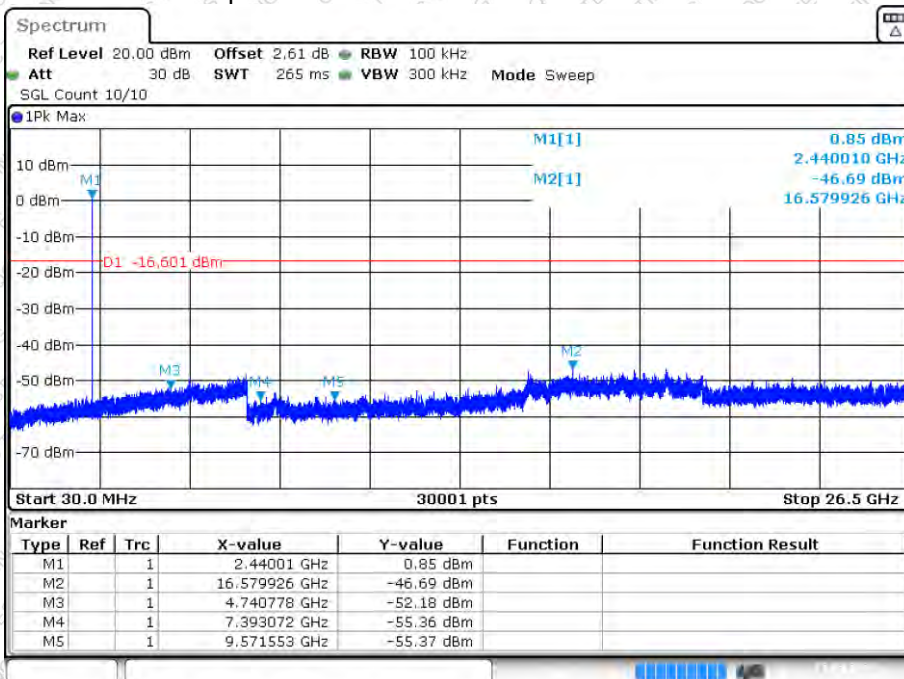

Date: 15.MAR.2024 16:21:41



Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

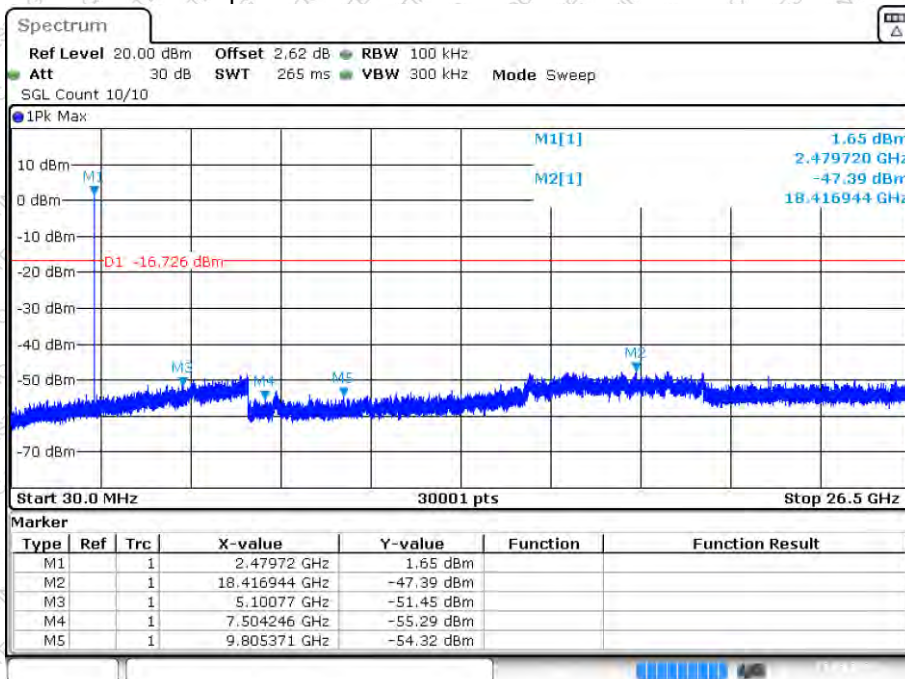

Date: 15.MAR.2024 16:22:57

9.2 Radiated Emission Method

9.2.1 Applicable Standard

FCC Part15 C Section 15.209 and 15.205

9.2.2 Limit


Frequency	Limit (uV/m)	Value	Measurement Distance
0.009MHz-0.490MHz	2400/F(KHz)	QP	300m
0.490MHz-1.705MHz	24000/F(KHz)	QP	30m
1.705MHz-30MHz	30	QP	30m

Frequency	Field Strengths Limits (uV/m at 3 m)	Field Strengths Limits (dBuV/m at 3 m)	Remark
30 – 88	100	40.0	Quasi-peak
88 – 216	150	43.5	Quasi-peak
216 – 960	200	46.0	Quasi-peak
Above 960	500	54.0	Quasi-peak
Above 1GHz	/	74.0	Peak
		54.0	Average


Note: $\text{dBuV/m} = 20\log(\mu\text{V/m})$

9.2.3 Test setup


For radiated emissions from 9kHz to 30MHz

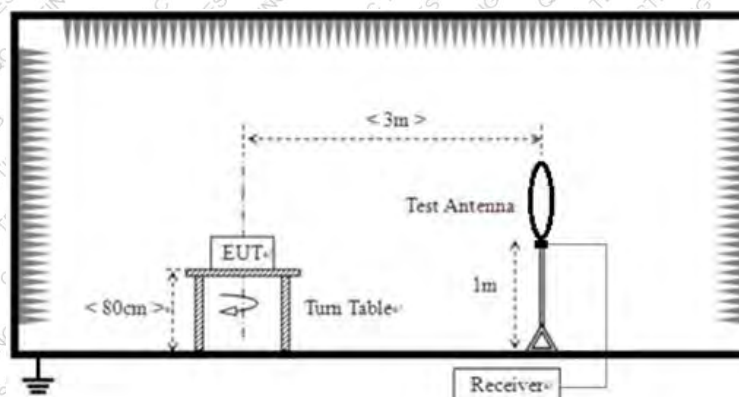

For radiated emissions from 30MHz to 1GHz

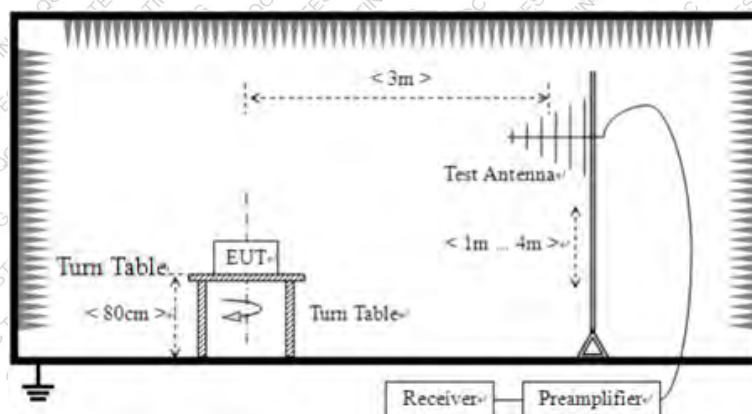

For radiated emissions above 1GHz

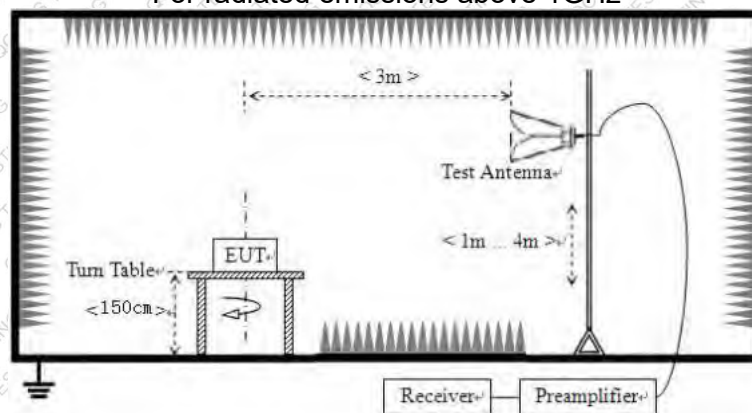

9.2.4 EMI Test Receiver Setup

Frequency	RBW	VBW	IF B/W	Measurement
9KHz-150KHz	200Hz	600Hz	/	QP
150KHz-30MHz	9KHz	30KHz	/	QP
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	10 Hz	/	Average

Remark: For the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission test in these three bands are based on measurements employing an average detector.

9.2.5 Test procedure

- The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.



- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

9.2.6 Test Data

Temperature	22 °C	Humidity	52 %
ATM Pressure	101.1kPa	Antenna Gain	3.37dBi
Test by	LBi Li	Test result	PASS

Test voltage: AC 120V/60Hz.

Remarks:


1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
2. The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.



Below 1GHz

Pre-scan all test modes, found worst case at GFSK 2402MHz, and so only show the test result of GFSK 2402MHz.


Horizontal: (Model: INFINITY 1300 PRO)

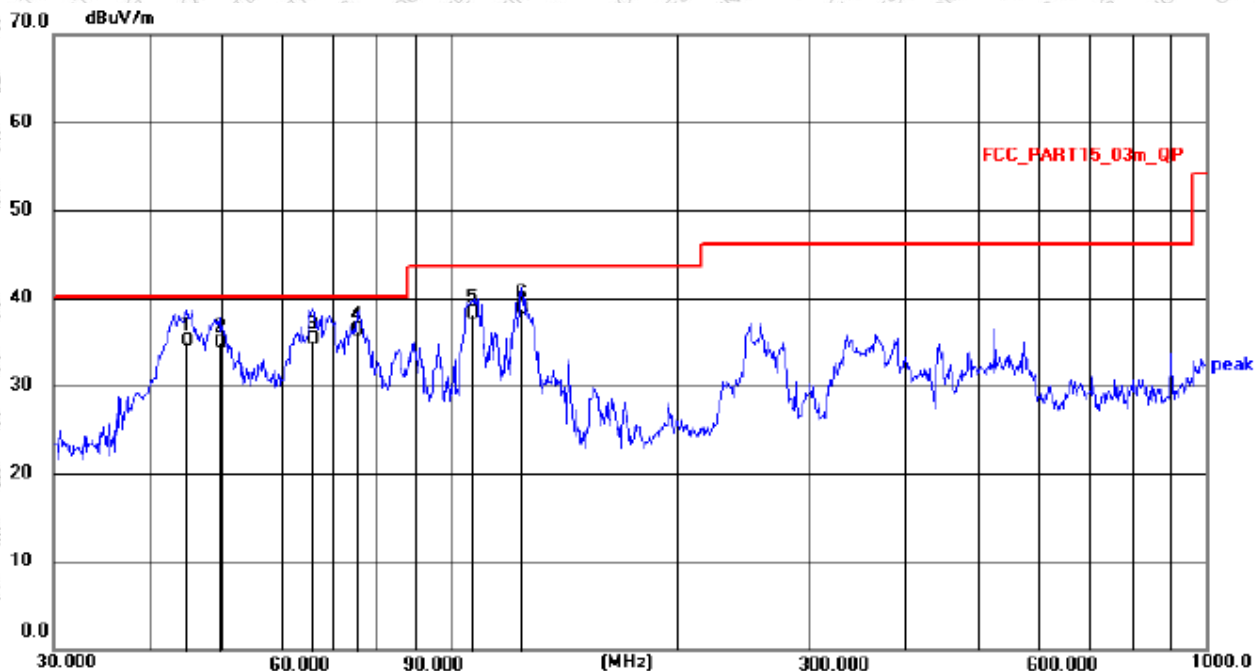

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	44.9004	20.37	14.71	35.08	40.00	4.92	QP
2	49.7066	20.19	14.65	34.84	40.00	5.16	QP
3	65.8028	22.27	12.99	35.26	40.00	4.74	QP
4 *	75.4462	25.10	11.29	36.39	40.00	3.61	QP
5	107.1337	26.41	11.89	38.30	43.50	5.20	QP
6	124.5690	25.07	13.72	38.79	43.50	4.71	QP




Vertical: (Model: INFINITY 1300 PRO)

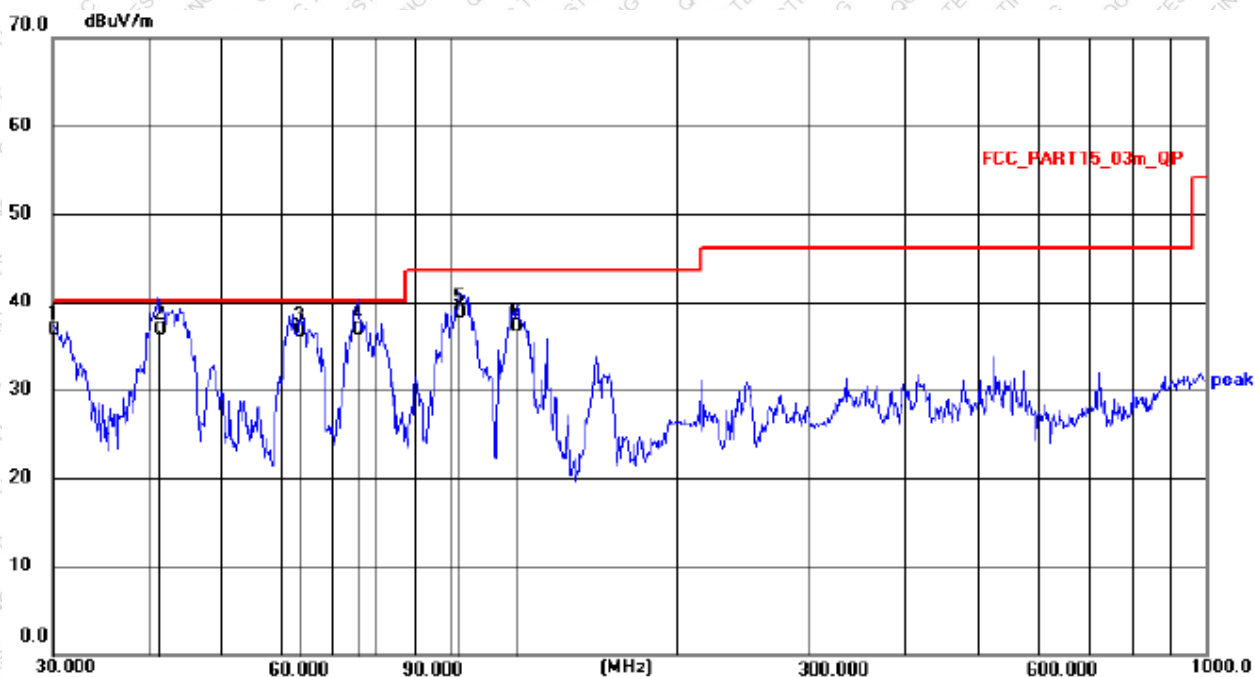

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.1051	24.40	12.46	36.86	40.00	3.14	QP
2 *	41.4215	22.33	14.57	36.90	40.00	3.10	QP
3	63.5356	23.65	12.98	36.63	40.00	3.37	QP
4	75.7112	26.05	10.73	36.78	40.00	3.22	QP
5	103.4419	27.10	11.61	38.71	43.50	4.79	QP
6	122.8336	23.93	13.28	37.21	43.50	6.29	QP




Horizontal: (Model: INFINITY 1200)

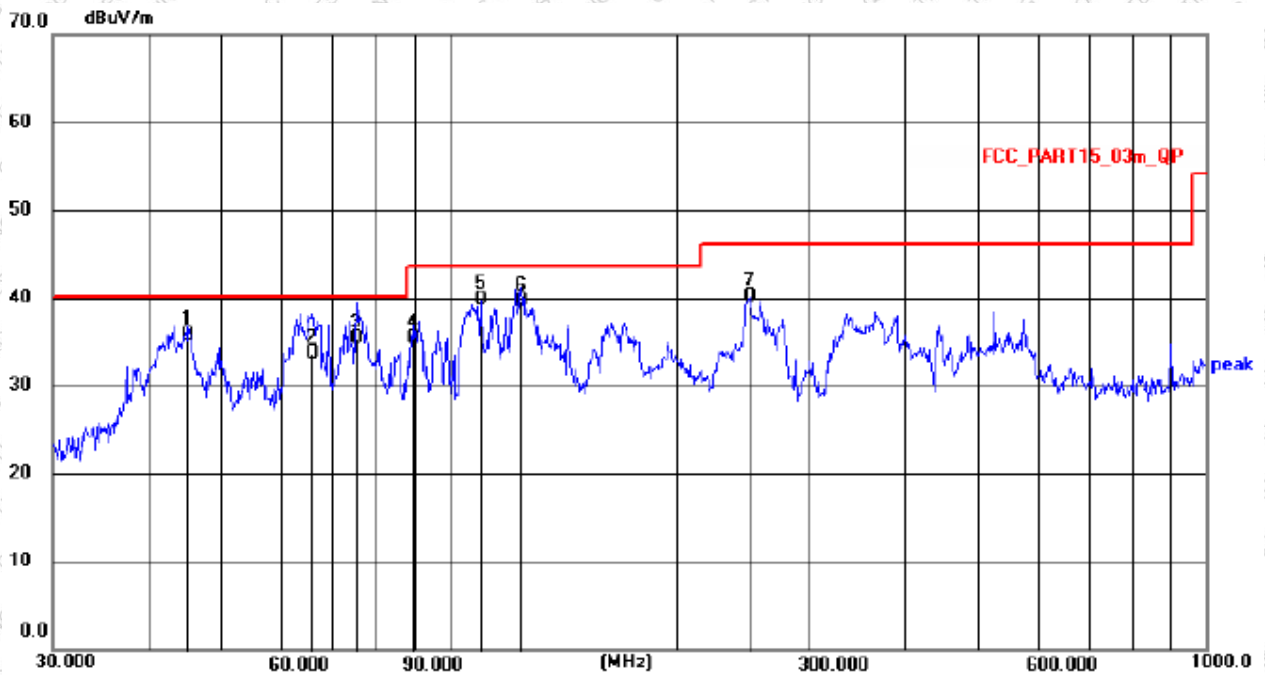

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	45.2165	21.05	14.71	35.76	40.00	4.24	QP
2	65.8028	20.77	12.99	33.76	40.00	6.24	QP
3	75.4462	24.10	11.29	35.39	40.00	4.61	QP
4	89.9046	25.31	10.15	35.46	43.50	8.04	QP
5 *	110.1816	27.55	12.27	39.82	43.50	3.68	QP
6	124.5690	25.85	13.72	39.57	43.50	3.93	QP
7	249.4250	26.82	13.38	40.20	46.00	5.80	QP



Vertical: (Model: INFINITY 1200)

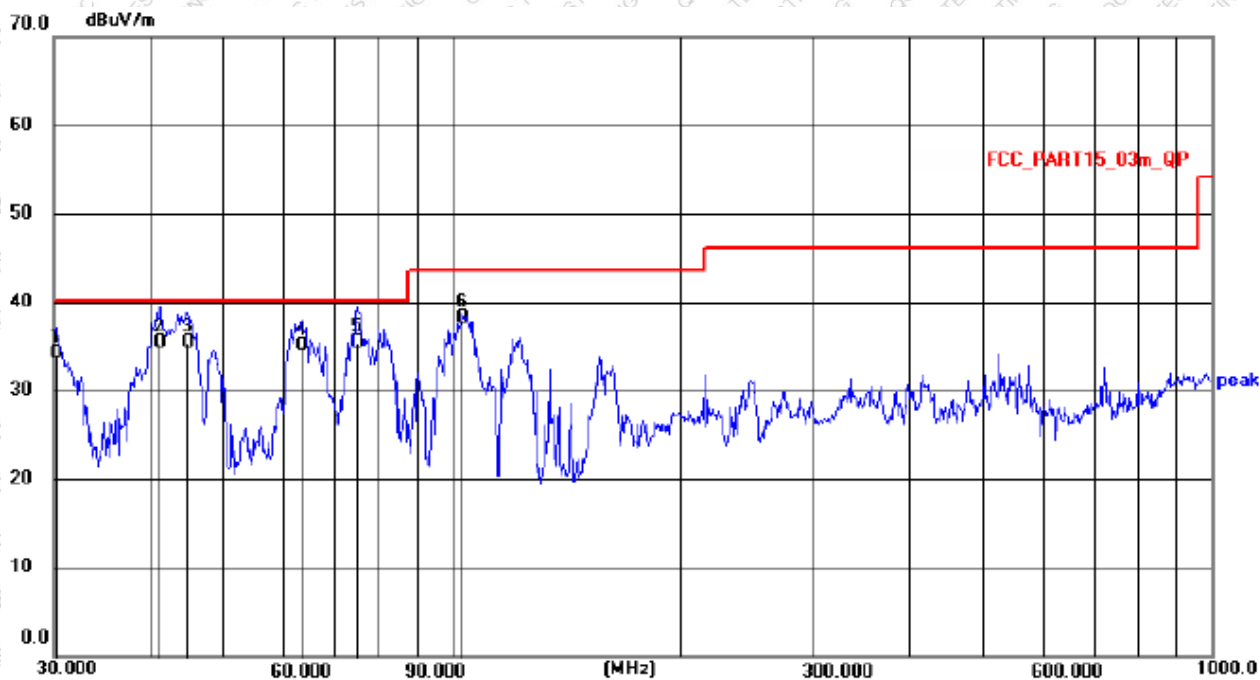

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.2103	21.67	12.48	34.15	40.00	5.85	QP
2 *	41.2764	20.90	14.57	35.47	40.00	4.53	QP
3	44.9004	20.85	14.51	35.36	40.00	4.64	QP
4	63.5356	22.15	12.98	35.13	40.00	4.87	QP
5	75.1821	24.57	10.83	35.40	40.00	4.60	QP
6	103.4419	26.60	11.61	38.21	43.50	5.29	QP



Above 1GHz

Test channel: Lowest channel

Frequency (MHz)	Read Level (dBμV)	polarization	Factor (dB/m)	Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector
2310	33.57	H	0.94	34.51	74	39.49	peak
2310	34.25	V	0.92	35.17	74	38.83	peak
2390	40.99	H	1.16	42.15	74	31.85	peak
2390	35.66	V	1.1	36.76	74	37.24	peak
4804	45.23	H	-4.37	40.86	74	33.14	peak
4804	44.82	V	-4.51	40.31	74	33.69	peak

Test channel: Middle channel

Frequency (MHz)	Read Level (dBμV)	polarization	Factor (dB/m)	Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector
4880	44.81	H	-4.1	40.71	74	33.29	peak
4880	46.09	V	-4.23	41.86	74	32.14	peak

Test channel: Highest channel

Frequency (MHz)	Read Level (dBμV)	polarization	Factor (dB/m)	Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector
2483.5	50.85	H	1.4	52.25	74	21.75	peak
2483.5	42.75	V	1.3	44.05	54	29.95	peak
2500	34.50	H	1.43	35.93	74	38.07	peak
2500	35.54	V	1.33	36.87	74	37.13	peak
4960	45.03	H	-3.82	41.21	74	32.79	peak
4960	46.08	V	-3.93	42.15	74	31.85	peak

Remarks:

1. Level = Receiver Read level + Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

----- THE END OF TEST REPORT -----