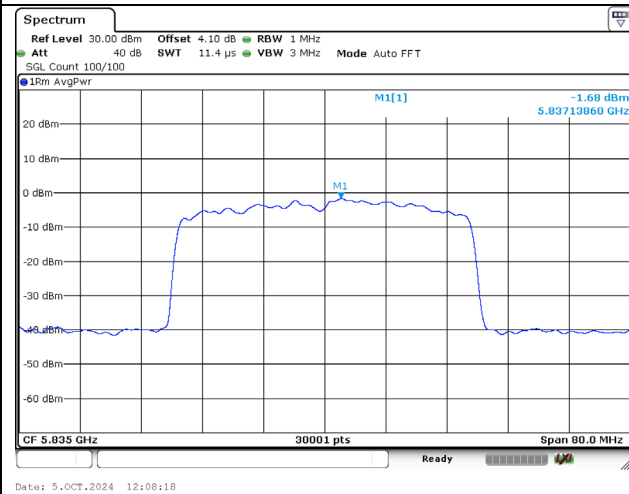
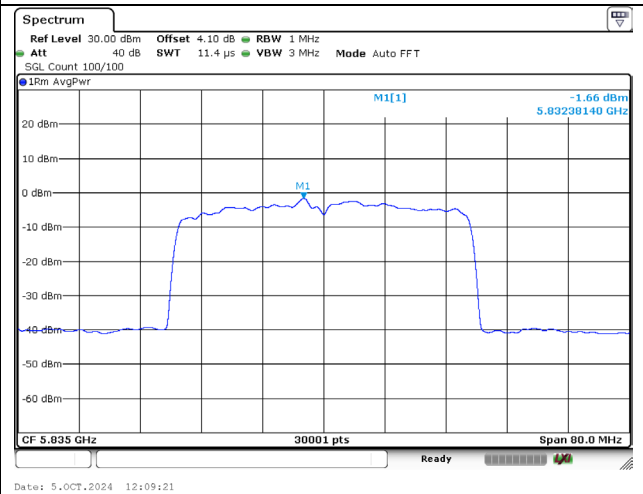
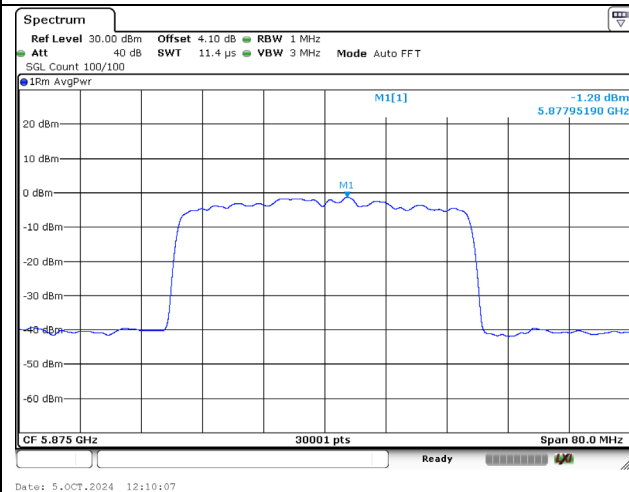
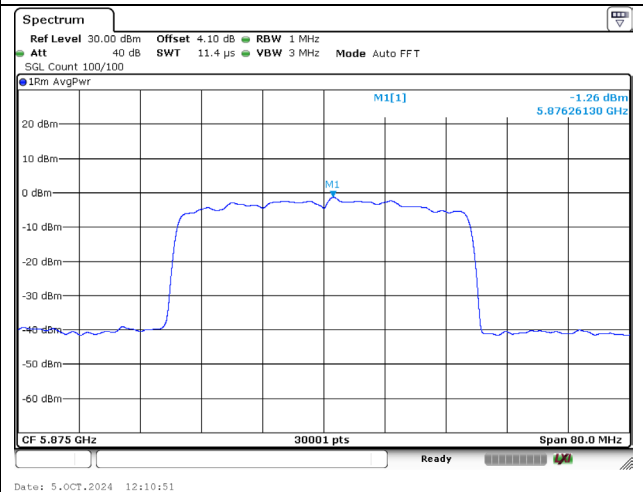
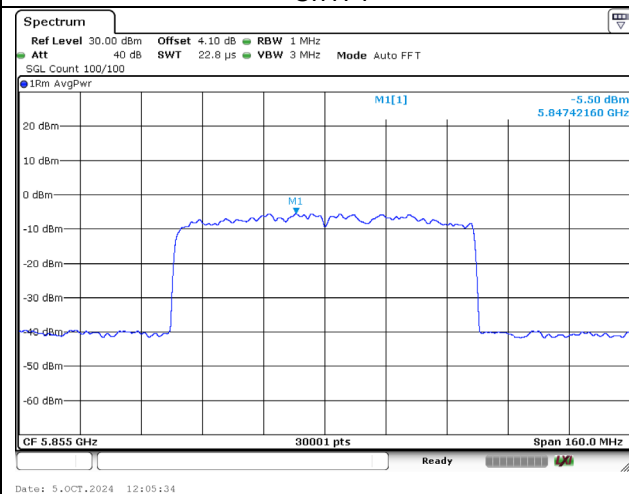
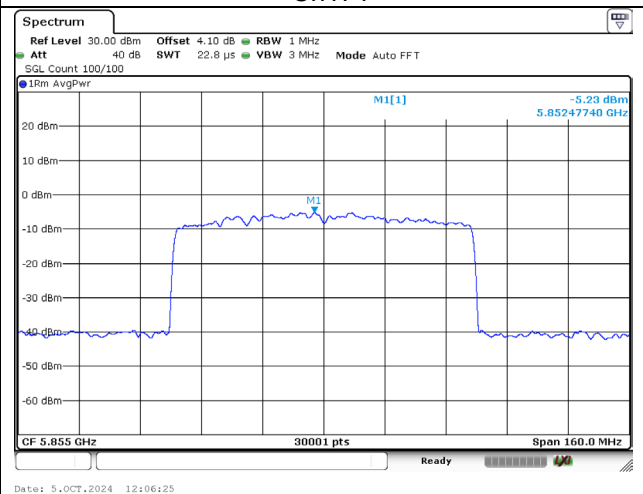


802.11be / 40MHz / Ant.1 / MCS0 / 5835MHz /
Ch167802.11be / 40MHz / Ant.2 / MCS0 / 5835MHz /
Ch167802.11be / 40MHz / Ant.1 / MCS0 / 5875MHz /
Ch175802.11be / 40MHz / Ant.2 / MCS0 / 5875MHz /
Ch175802.11be / 80MHz / Ant.1 / MCS0 / 5855MHz /
Ch171802.11be / 80MHz / Ant.2 / MCS0 / 5855MHz /
Ch171







<2TX, NSS2>

Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)		Result
		Ant. 1	Ant. 2	Total	Total	Limit	
802.11be (20 MHz)	5845 (U-NII-3~4)	0.23	0.37	5.35	7.96	14.00	Pass
	5865	0.63	1.06	5.90	8.51	14.00	Pass
	5885	0.84	1.10	6.02	8.63	14.00	Pass


Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)		Result
		Ant. 1	Ant. 2	Total	Total	Limit	
802.11be (40 MHz)	5835 (U-NII-3~4)	-1.79	-1.72	3.29	5.90	14.00	Pass
	5875	-1.48	-1.43	3.59	6.20	14.00	Pass

Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)			EIRP		Result
		Ant. 1	Ant. 2	Total	Total	Limit	
802.11be (80 MHz)	5855 (U-NII-3~4)	-5.32	-5.25	-0.24	2.37	14.00	Pass


Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)		Result
		Ant. 1	Ant. 2	Total	Total	Limit	
802.11be (160 MHz)	5815 (U-NII-3~4)	-7.17	-7.13	-2.10	0.51	14.00	Pass

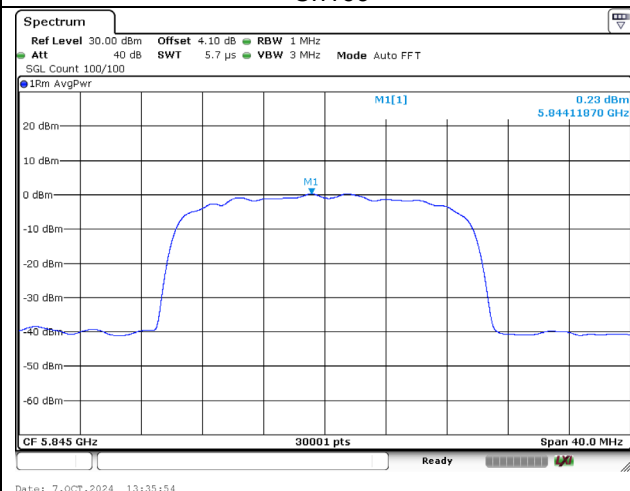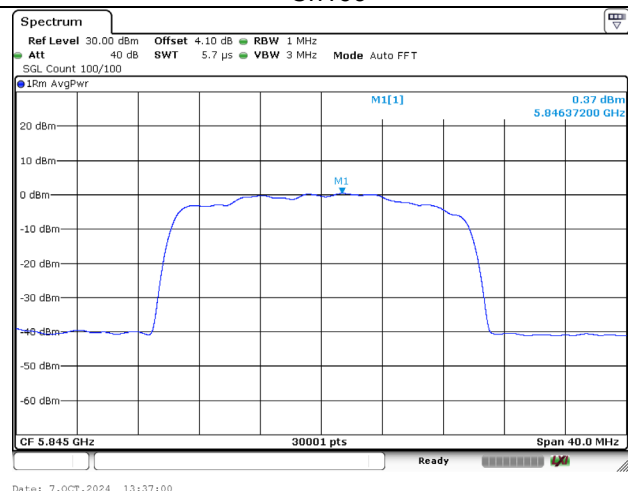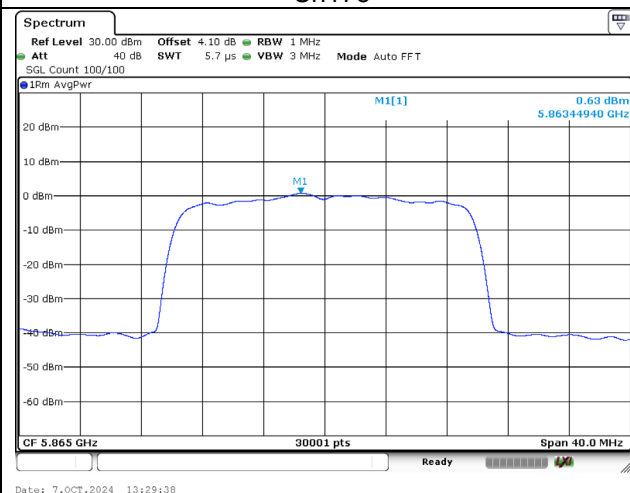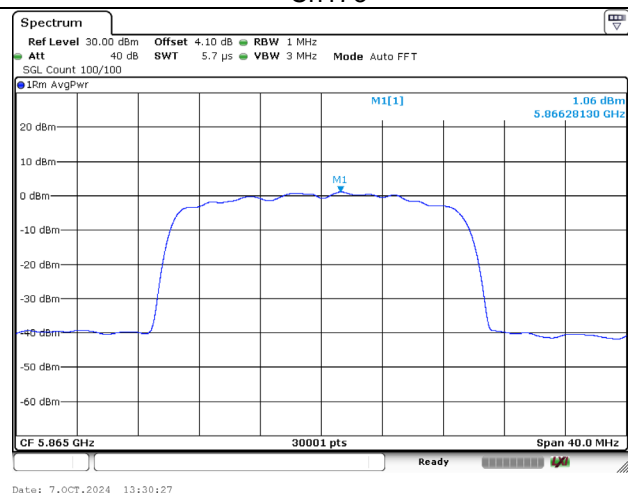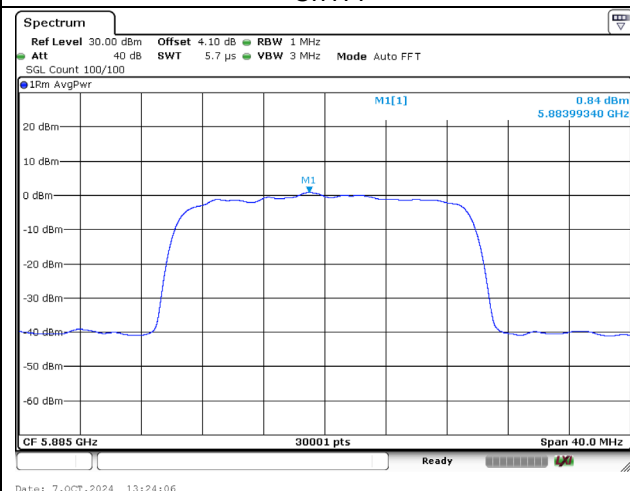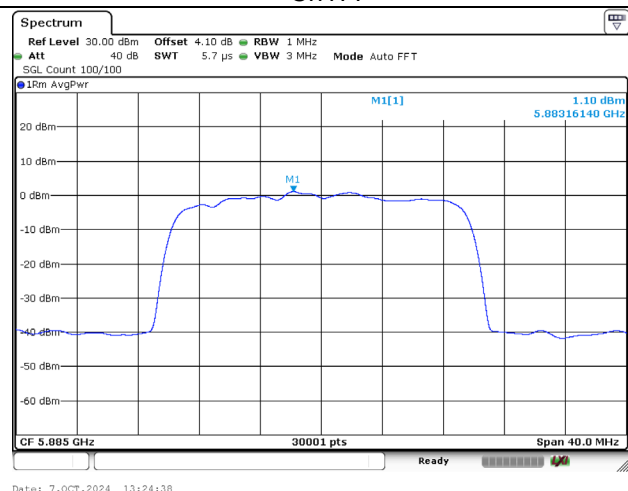802.11be / 20MHz / Ant.1 / MCS0 / 5845MHz /
Ch169802.11be / 20MHz / Ant.2 / MCS0 / 5845MHz /
Ch169802.11be / 20MHz / Ant.1 / MCS0 / 5865MHz /
Ch173802.11be / 20MHz / Ant.2 / MCS0 / 5865MHz /
Ch173802.11be / 20MHz / Ant.1 / MCS0 / 5885MHz /
Ch177802.11be / 20MHz / Ant.2 / MCS0 / 5885MHz /
Ch177


802.11be / 40MHz / Ant.1 / 5835MHz / Ch167

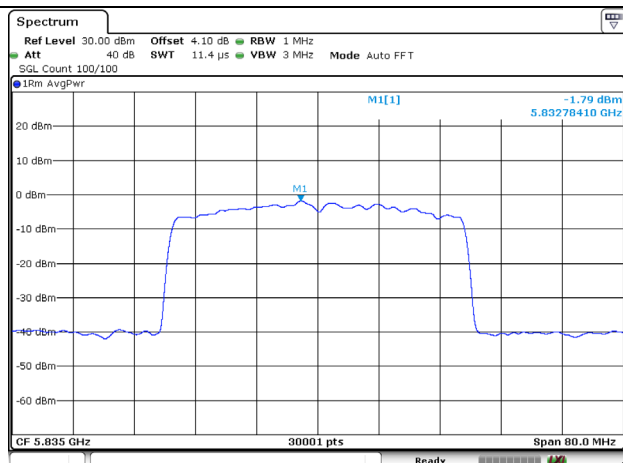


802.11be / 40MHz / Ant.2 / 5835MHz / Ch167

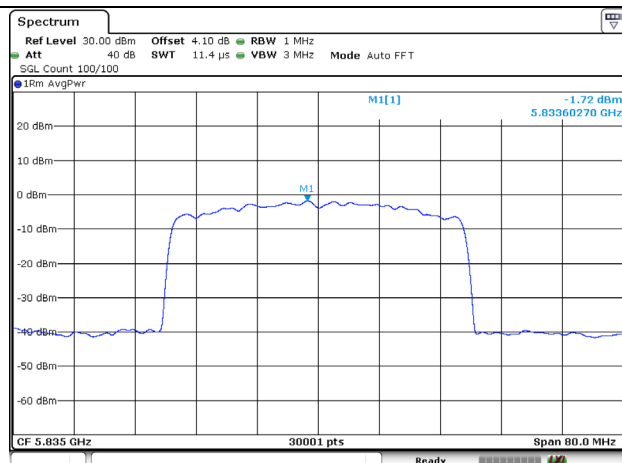


802.11be / 40MHz / Ant.1 / 5875MHz / Ch175

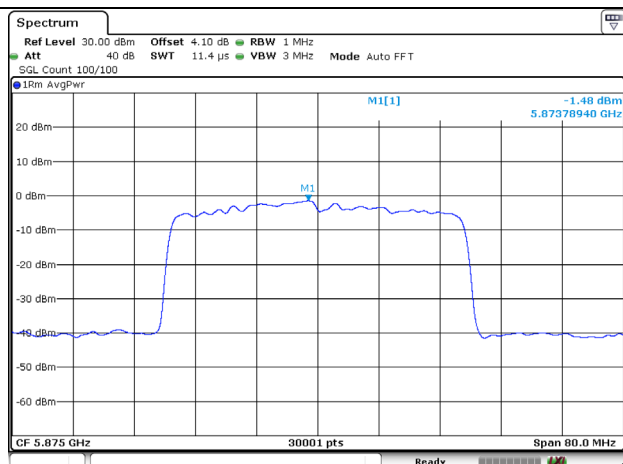


802.11be / 40MHz / Ant.2 / 5875MHz / Ch175

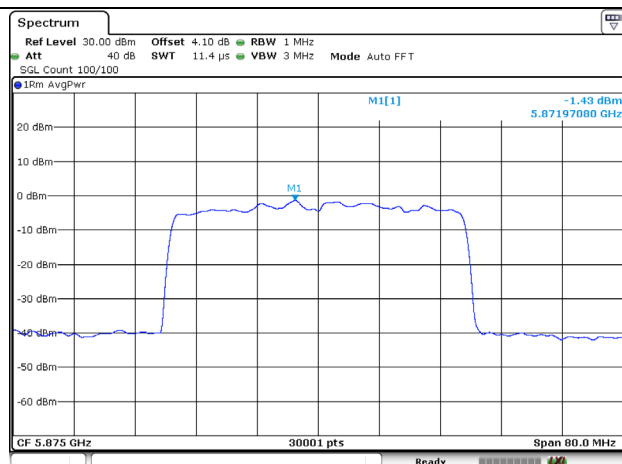


802.11be / 80MHz / Ant.1 / 5855MHz / Ch171

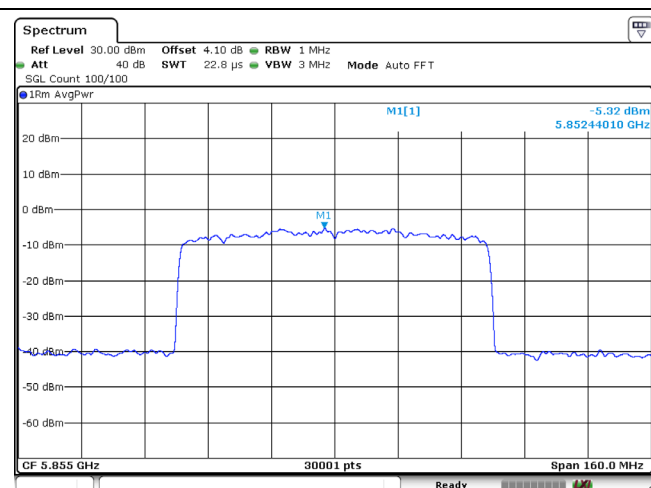

802.11be / 80MHz / Ant.2 / 5855MHz / Ch171

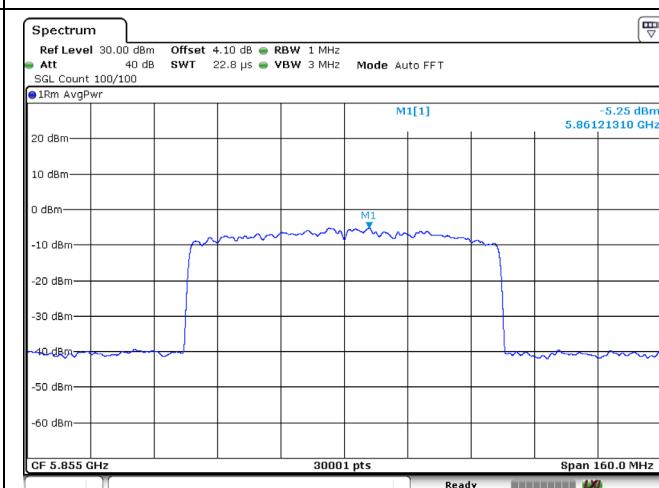


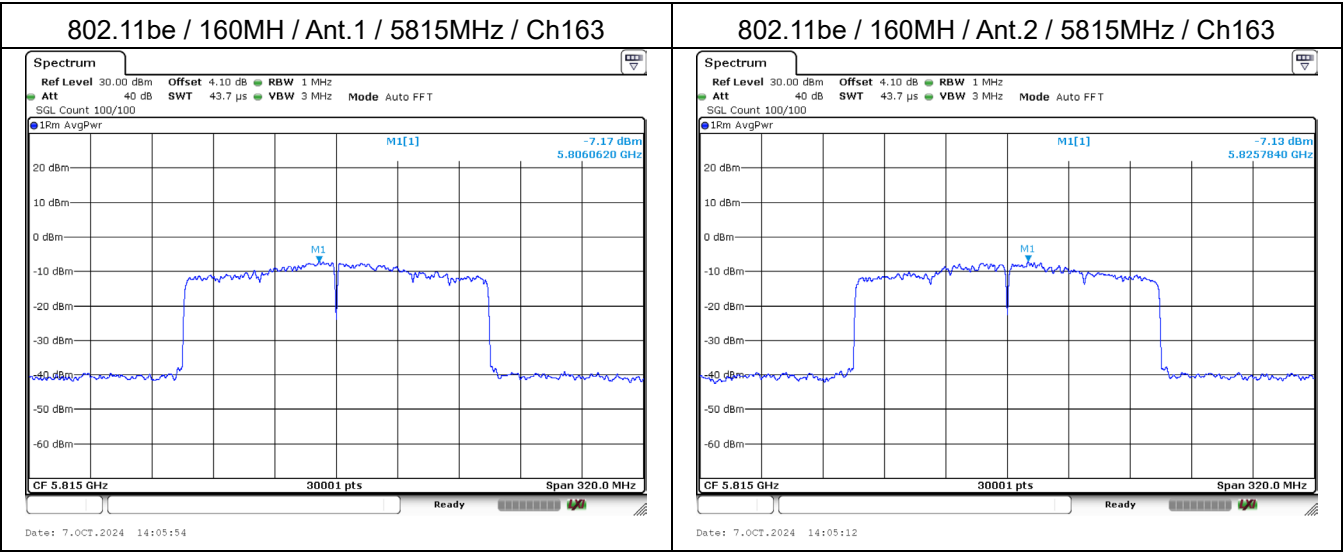

Appendix E. Test Result of Transmitter Radiated Spurious Emission

30 MHz ~ 1 GHz

Site :HC-CB04
Condition :3m Horizontal
Mode :LF_be80_TX
Test By :Ling Chen

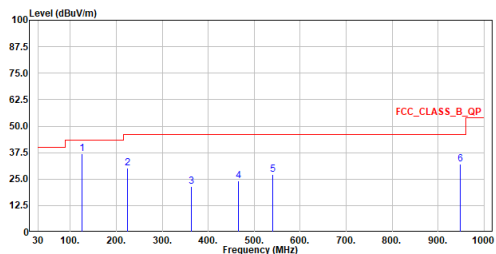


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	125.012	36.81	43.50	-6.69	41.63	-4.82	QP
2	225.019	30.08	46.00	-15.92	36.44	-6.36	QP
3	363.389	21.65	46.00	-24.35	22.67	-1.02	QP
4	465.433	24.00	46.00	-22.00	22.15	1.85	QP
5	540.657	27.03	46.00	-18.97	23.79	3.24	QP
6	948.202	32.03	46.00	-13.97	22.31	9.72	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m Vertical
Mode :LF_be80_TX
Test By :Ling Chen

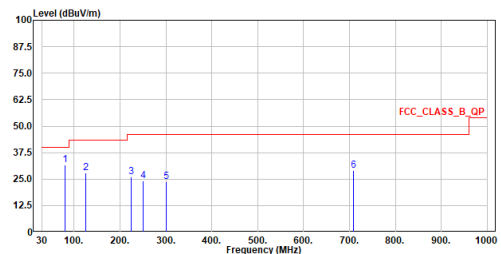


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	80.004	31.68	40.00	-8.32	38.68	-7.00	QP
2	124.963	27.75	43.50	-15.75	32.57	-4.82	QP
3	225.019	25.92	46.00	-20.08	32.28	-6.36	QP
4	249.996	24.33	46.00	-21.67	28.73	-4.40	QP
5	300.000	23.62	46.00	-22.38	26.19	-2.57	QP
6	709.049	28.90	46.00	-17.10	22.48	6.42	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Above 1 GHz

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5845MHz
Test By :Brook Cheng

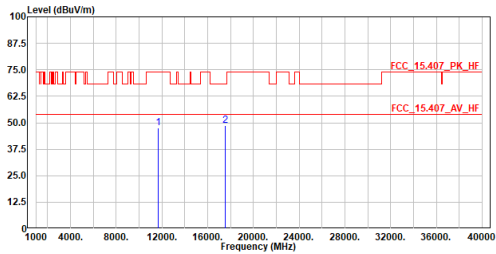


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11690.000	47.59	74.00	-26.41	53.57	-5.98	Peak
2	17535.000	48.81	68.20	-19.39	51.79	-2.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5845MHz
Test By :Brook Cheng

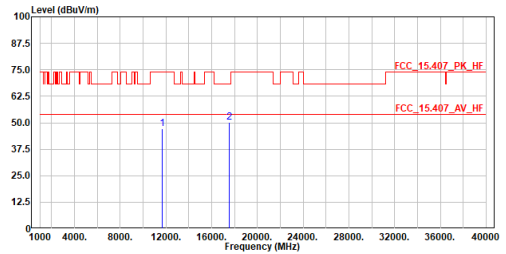


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11690.000	47.32	74.00	-26.68	53.30	-5.98	Peak
2	17535.000	50.01	68.20	-18.19	52.99	-2.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :a_TX_5865MHz
Test By :Cyril Chen

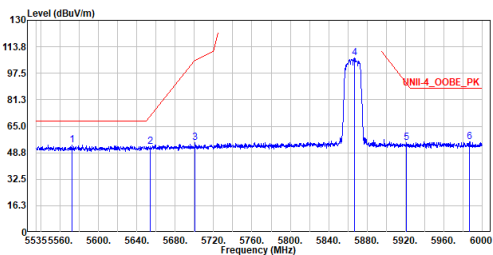


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5572.433	53.41	68.20	-14.79	31.60	21.81	Peak
2	5654.272	52.66	71.37	-18.71	30.60	22.06	Peak
3	5700.772	54.95	105.42	-50.47	32.76	22.19	Peak
4	5867.010	107.06	-----	-----	84.38	22.68	Peak
5	5920.717	55.15	91.43	-36.28	32.32	22.83	Peak
6	5986.515	55.67	88.20	-32.53	32.65	23.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 20
Mode :a_TX_5865MHz
Test By :Cyril Chen

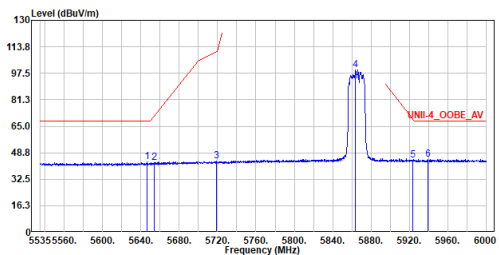


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5646.135	43.00	68.20	-25.20	20.97	22.03	Average
2	5654.272	42.68	71.37	-28.69	20.62	22.06	Average
3	5719.140	43.42	110.56	-67.14	21.17	22.25	Average
4	5863.987	99.79	-----	-----	77.12	22.67	Average
5	5923.275	44.32	69.50	-25.18	21.49	22.83	Average
6	5939.317	44.68	68.20	-23.52	21.80	22.88	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :a_TX_5865MHz
Test By :Cyril Chen

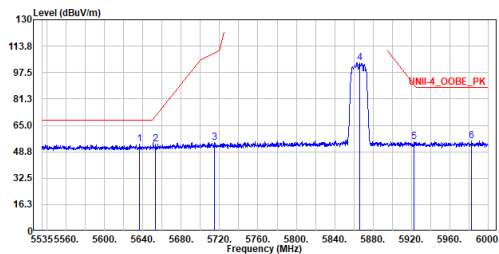

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5636.603	53.57	68.20	-14.63	31.56	22.01	Peak
2	5652.877	53.43	70.34	-16.91	31.38	22.05	Peak
3	5714.490	54.56	109.26	-54.70	32.33	22.23	Peak
4	5866.080	103.53	-----	-----	80.85	22.68	Peak
5	5923.042	54.84	89.67	-34.83	32.01	22.83	Peak
6	5982.795	55.63	88.20	-32.57	32.62	23.01	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 20
Mode :a_TX_5865MHz
Test By :Cyril Chen

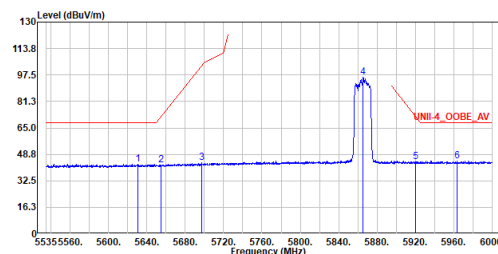

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5630.558	42.81	68.20	-25.39	20.82	21.99	Average
2	5654.505	42.37	71.54	-29.17	20.31	22.06	Average
3	5697.285	43.44	103.19	-59.75	21.26	22.18	Average
4	5865.615	95.92	-----	-----	73.24	22.68	Average
5	5920.485	44.39	71.60	-27.21	21.56	22.83	Average
6	5963.498	44.66	68.20	-23.54	21.71	22.95	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5865MHz
Test By :Brook Cheng

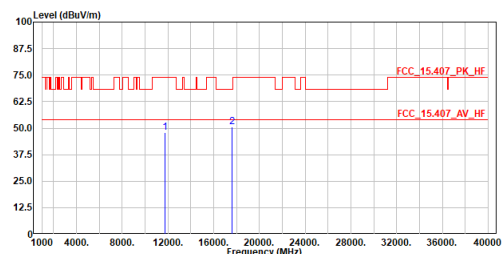

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11730.000	48.04	74.00	-25.96	54.00	-5.96	Peak
2	17595.000	50.51	68.20	-17.69	53.37	-2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5865MHz
Test By :Brook Cheng

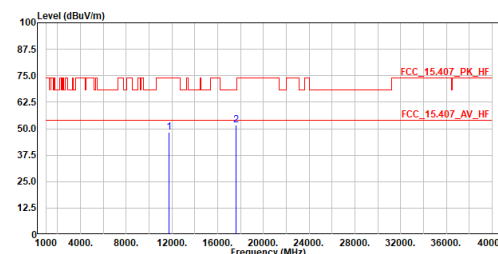

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11730.000	48.29	74.00	-25.71	54.25	-5.96	Peak
2	17595.000	51.76	68.20	-16.44	54.62	-2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :a_TX_5885MHz
Test By :Cyril Chen

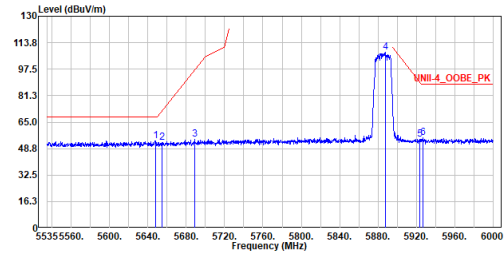

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5647.763	53.44	68.20	-14.76	31.40	22.04	Peak
2	5654.505	52.27	71.54	-19.27	30.21	22.06	Peak
3	5688.915	54.60	97.00	-42.40	32.44	22.16	Peak
4	5887.703	107.76	-----	85.02	22.74	22.74	Peak
5	5923.507	54.53	89.32	-34.79	31.70	22.83	Peak
6	5926.530	55.24	88.20	-32.96	32.40	22.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 20
Mode :a_TX_5885MHz
Test By :Cyril Chen

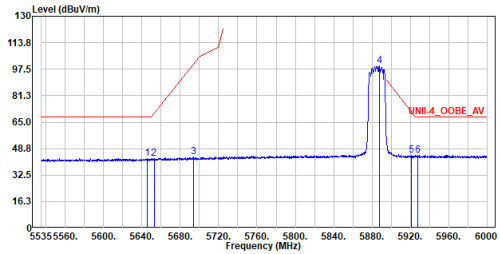

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5645.670	42.73	68.20	-25.47	20.70	22.03	Average
2	5652.645	42.46	70.16	-27.70	20.42	22.04	Average
3	5693.565	43.51	100.44	-56.93	21.34	22.17	Average
4	5887.470	99.48	-----	76.74	22.74	22.74	Average
5	5921.415	44.50	70.90	-26.40	21.67	22.83	Average
6	5927.460	44.82	68.20	-23.38	21.96	22.86	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :a_TX_5885MHz
Test By :Cyril Chen

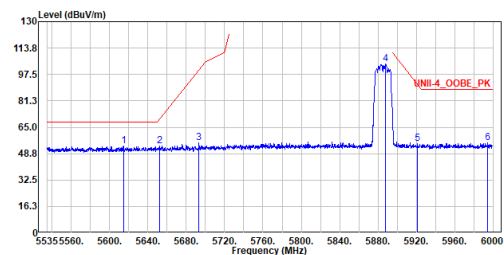

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5614.748	53.26	68.20	-14.94	31.31	21.95	Peak
2	5651.947	53.47	69.65	-16.18	31.43	22.04	Peak
3	5693.333	55.20	100.27	-45.07	33.03	22.17	Peak
4	5887.703	103.82	-----	81.08	22.74	22.74	Peak
5	5921.183	55.05	91.08	-36.03	32.22	22.83	Peak
6	5994.188	55.45	88.20	-32.75	32.40	23.05	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 20
Mode :a_TX_5885MHz
Test By :Cyril Chen

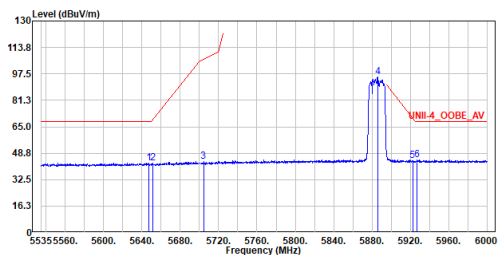

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5647.297	42.72	68.20	-25.48	20.68	22.04	Average
2	5651.715	42.54	69.48	-26.94	20.50	22.04	Average
3	5784.260	43.81	106.39	-62.58	21.60	22.21	Average
4	5885.842	95.69	-----	72.96	22.73	22.73	Average
5	5922.345	44.24	70.20	-25.96	21.41	22.83	Average
6	5926.763	44.83	68.20	-23.37	21.99	22.84	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5885MHz
Test By :Brook Cheng

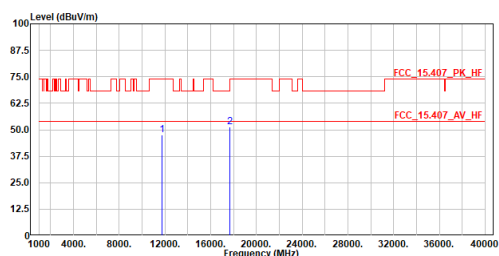


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11770.000	47.71	74.00	-26.29	53.65	-5.94	Peak
2	17655.000	51.37	68.20	-16.83	54.12	-2.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5885MHz
Test By :Brook Cheng

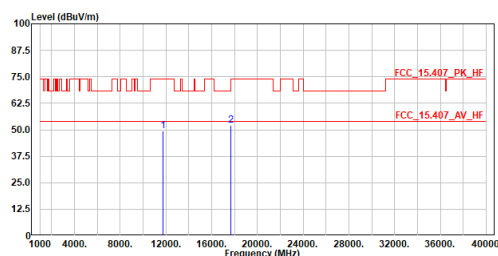


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11770.000	49.35	74.00	-24.65	55.29	-5.94	Peak
2	17655.000	51.96	68.20	-16.24	54.71	-2.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_5845MHz
Test By :Brook Cheng

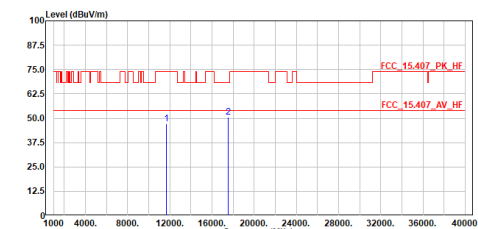


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11690.000	47.17	74.00	-26.83	53.15	-5.98	Peak
2	17535.000	50.43	68.20	-17.77	53.41	-2.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_5845MHz
Test By :Brook Cheng

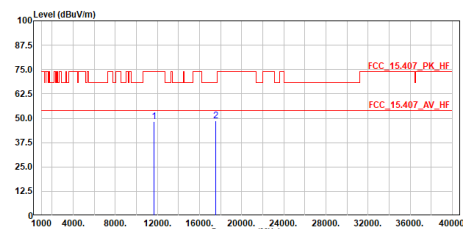


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11690.000	48.20	74.00	-25.80	54.18	-5.98	Peak
2	17535.000	48.61	68.20	-19.59	51.59	-2.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_5865MHz
Test By :Cyril Chen

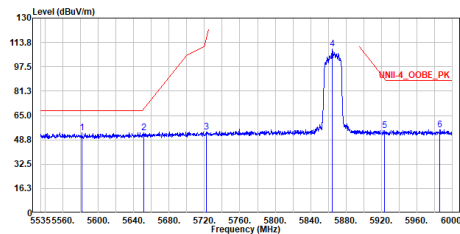


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5581.500	53.63	68.20	-14.57	31.78	21.85	Peak
2	5651.250	53.45	69.13	-15.68	31.41	22.04	Peak
3	5722.395	54.00	116.26	-62.18	31.82	22.26	Peak
4	5864.685	109.63	-----	-----	86.95	22.68	Peak
5	5923.507	54.90	89.32	-34.42	32.07	22.83	Peak
6	5986.283	55.42	88.20	-32.78	32.40	23.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be20_TX_5865MHz
Test By :Cyril Chen

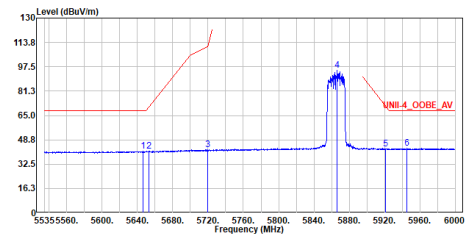


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5646.600	40.97	68.20	-27.23	18.94	22.03	Average
2	5653.110	41.40	70.51	-29.11	19.35	22.05	Average
3	5719.605	42.24	110.69	-68.45	19.98	22.26	Average
4	5866.545	95.16	-----	-----	72.48	22.68	Average
5	5920.950	42.73	71.25	-28.52	19.90	22.83	Average
6	5945.130	43.02	68.20	-25.18	20.12	22.90	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_5865MHz
Test By :Cyril Chen

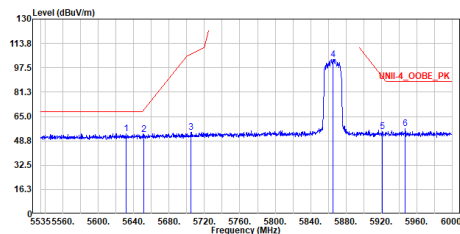


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5631.487	53.60	68.20	-14.60	31.61	21.99	Peak
2	5651.482	53.05	69.30	-16.25	31.01	22.04	Peak
3	5704.725	54.69	106.52	-51.83	32.48	22.21	Peak
4	5865.615	103.21	-----	-----	80.53	22.68	Peak
5	5920.717	54.94	91.43	-36.49	32.11	22.83	Peak
6	5946.757	56.91	88.20	-31.29	34.01	22.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be20_TX_5865MHz
Test By :Cyril Chen

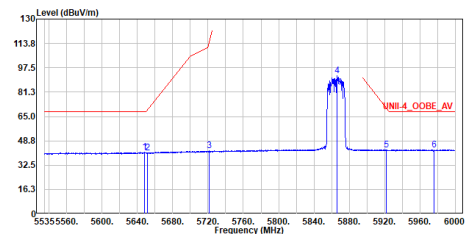


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5647.995	41.08	68.20	-27.12	19.04	22.04	Average
2	5651.250	40.87	69.13	-28.26	18.83	22.04	Average
3	5721.232	42.00	113.61	-71.61	19.74	22.26	Average
4	5865.848	92.20	-----	-----	69.52	22.68	Average
5	5921.880	42.75	70.55	-27.80	19.92	22.83	Average
6	5976.053	42.88	68.20	-25.32	19.88	23.00	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_5865MHz
Test By :Brook Cheng

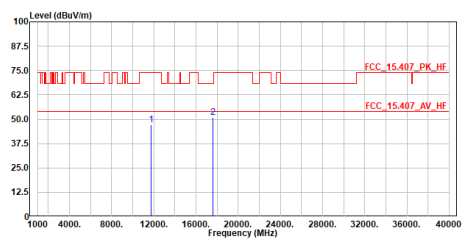


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11730.000	47.24	74.00	-26.76	53.20	-5.96	Peak
2	17595.000	51.12	68.20	-17.08	53.98	-2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_5865MHz
Test By :Brook Cheng

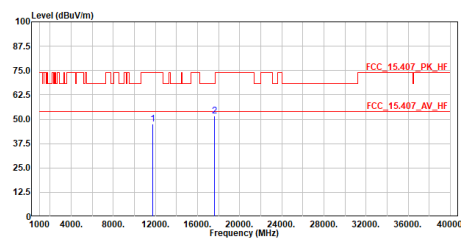


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11730.000	47.65	74.00	-26.35	53.61	-5.96	Peak
2	17595.000	51.88	68.20	-16.32	54.74	-2.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_5885MHz
Test By :Cyril Chen

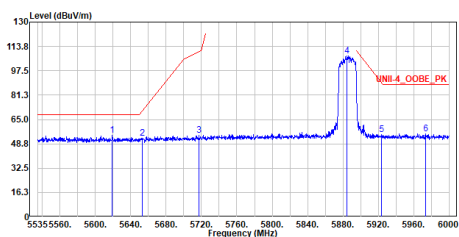


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5618.933	54.35	68.20	-13.85	32.40	21.95	Peak
2	5653.342	52.32	70.68	-18.36	30.26	22.06	Peak
3	5717.047	54.40	109.97	-55.57	32.17	22.23	Peak
4	5884.680	107.60	-----	-----	84.88	22.72	Peak
5	5923.973	54.06	88.97	-34.11	32.03	22.83	Peak
6	5973.263	55.40	88.20	-32.80	32.42	22.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be20_TX_5885MHz
Test By :Cyril Chen

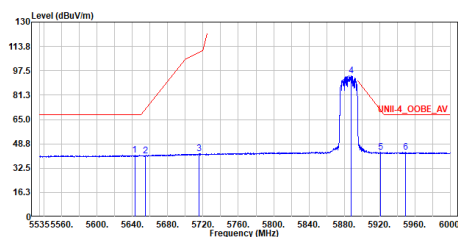


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5642.647	41.02	68.20	-27.18	18.99	22.03	Average
2	5654.737	40.93	71.71	-30.78	18.87	22.06	Average
3	5715.188	42.05	109.45	-67.40	19.82	22.23	Average
4	5887.935	94.17	-----	-----	71.43	22.74	Average
5	5921.183	42.95	71.08	-28.13	20.12	22.83	Average
6	5949.547	43.10	68.20	-25.10	20.18	22.92	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be20_TX_5885MHz
Test By :Cyril Chen

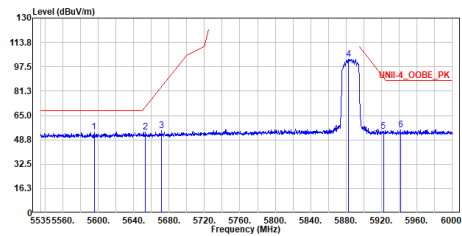

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5595.217	54.16	68.20	-14.04	32.27	21.89	Peak
2	5653.342	53.87	70.68	-16.81	31.81	22.06	Peak
3	5671.245	54.71	83.93	-29.22	32.60	22.11	Peak
4	5883.053	102.55	-----	-----	79.83	22.72	Peak
5	5922.345	54.39	90.20	-35.81	31.56	22.83	Peak
6	5941.875	55.47	88.20	-32.73	32.58	22.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be20_TX_5885MHz
Test By :Cyril Chen

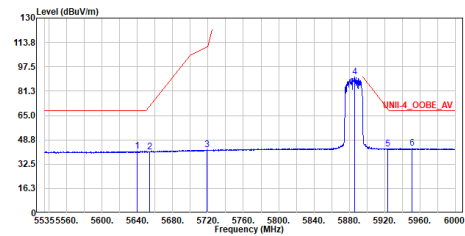

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5639.857	40.99	68.20	-27.21	18.97	22.02	Average
2	5653.575	40.89	70.85	-29.96	18.83	22.06	Average
3	5718.675	41.95	110.43	-68.48	19.71	22.24	Average
4	5885.842	90.67	-----	-----	67.94	22.73	Average
5	5923.507	42.71	69.32	-26.61	19.88	22.83	Average
6	5951.408	42.96	68.20	-25.24	20.04	22.92	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_5885MHz
Test By :Brook Cheng

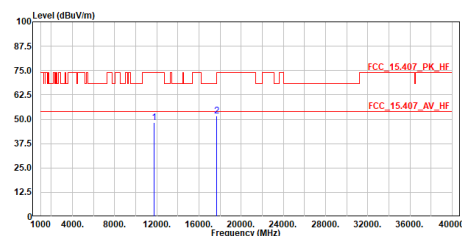

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11770.000	48.28	74.00	-25.72	54.22	-5.94	Peak
2	17655.000	51.81	68.20	-16.39	54.56	-2.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_5885MHz
Test By :Brook Cheng

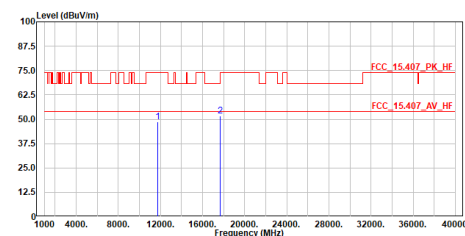

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11770.000	48.52	74.00	-25.48	54.46	-5.94	Peak
2	17655.000	51.67	68.20	-16.53	54.42	-2.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_5835MHz
Test By :Brook Cheng

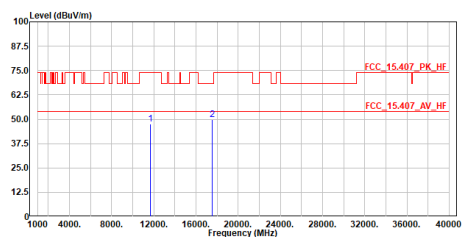


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11670.000	47.68	74.00	-26.32	53.67	-5.99	Peak
2	17505.000	49.75	68.20	-18.45	52.80	-3.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_5835MHz
Test By :Brook Cheng

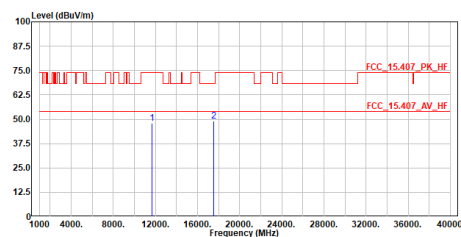


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11670.000	48.02	74.00	-25.98	54.01	-5.99	Peak
2	17505.000	49.16	68.20	-19.04	52.21	-3.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_5875MHz
Test By :Cyril Chen

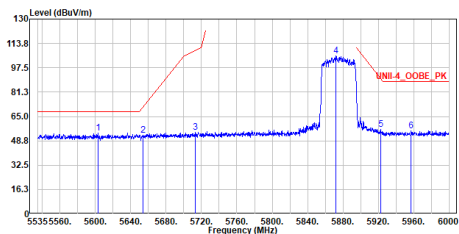


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5602.890	53.87	68.20	-14.33	31.96	21.91	Peak
2	5653.575	52.66	70.85	-18.19	30.60	22.06	Peak
3	5712.862	54.38	108.80	-54.42	32.16	22.22	Peak
4	5872.357	105.40	-----	-----	82.71	22.69	Peak
5	5922.578	56.60	90.02	-33.42	33.77	22.83	Peak
6	5957.220	55.59	88.20	-32.61	32.66	22.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :be40_TX_5875MHz
Test By :Cyril Chen

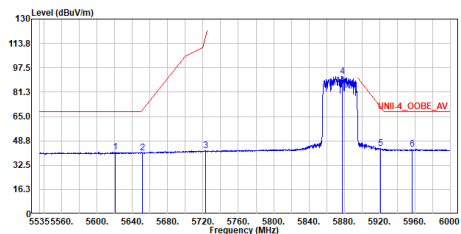


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5620.328	41.12	68.20	-27.08	19.16	21.96	Average
2	5651.715	40.96	69.48	-28.52	18.92	22.04	Average
3	5722.860	42.12	117.32	-75.20	19.86	22.26	Average
4	5877.705	91.96	-----	-----	69.26	22.70	Average
5	5921.183	43.52	71.08	-27.56	20.69	22.83	Average
6	5957.220	43.09	68.20	-25.11	20.16	22.93	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_5875MHz
Test By :Cyril Chen

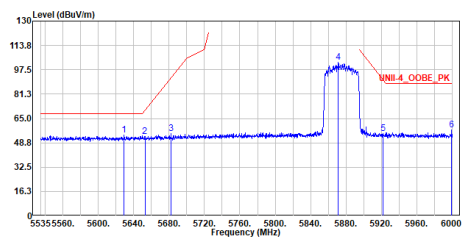

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5629.163	53.92	68.20	-14.28	31.94	21.98	Peak
2	5652.645	53.00	70.16	-17.16	30.96	22.04	Peak
3	5682.172	54.76	92.01	-37.25	32.62	22.14	Peak
4	5871.428	102.50	-----	-----	79.81	22.69	Peak
5	5922.112	54.96	90.38	-35.42	32.13	22.83	Peak
6	5999.535	57.28	88.20	-30.92	34.22	23.06	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :be40_TX_5875MHz
Test By :Cyril Chen

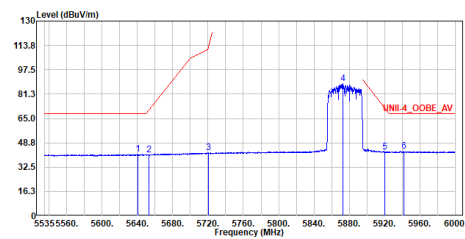

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5640.322	41.27	68.20	-26.93	19.25	22.02	Average
2	5652.877	40.89	70.34	-29.45	18.84	22.05	Average
3	5720.768	42.20	112.55	-70.35	19.94	22.26	Average
4	5872.590	88.14	-----	-----	65.45	22.69	Average
5	5920.252	42.77	71.78	-29.01	19.94	22.83	Average
6	5941.643	43.20	68.20	-25.00	20.32	22.88	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_5875MHz
Test By :Brook Cheng

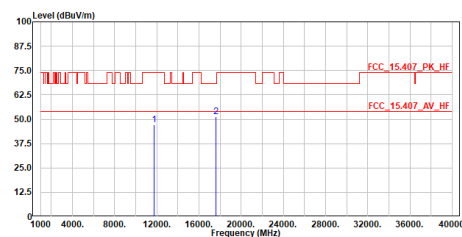

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11750.000	47.24	74.00	-26.76	53.19	-5.95	Peak
2	17625.000	51.14	68.20	-17.06	53.94	-2.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_5875MHz
Test By :Brook Cheng

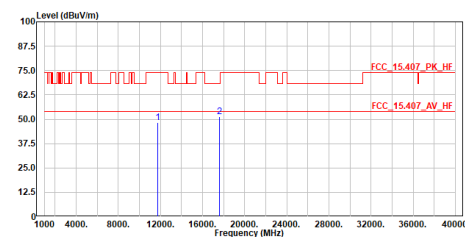

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11750.000	48.47	74.00	-25.53	54.42	-5.95	Peak
2	17625.000	51.45	68.20	-16.75	54.25	-2.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be80_TX_5855MHz
Test By :Brook Cheng

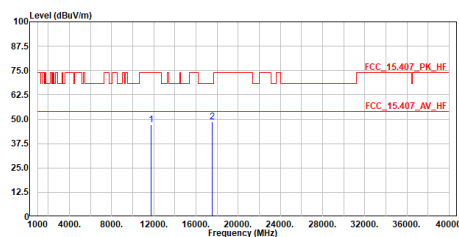


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11710.000	47.17	74.00	-26.83	53.14	-5.97	Peak
2	17565.000	48.80	68.20	-19.40	51.73	-2.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be80_TX_5855MHz
Test By :Brook Cheng

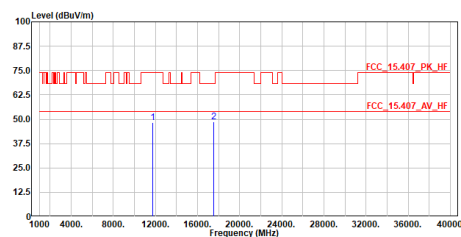


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11710.000	48.20	74.00	-25.80	54.17	-5.97	Peak
2	17565.000	48.64	68.20	-19.56	51.57	-2.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be160_TX_5815MHz
Test By :Brook Cheng

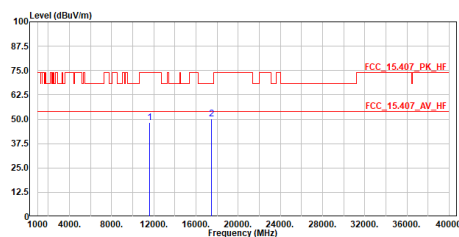


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11630.000	48.20	74.00	-25.80	54.20	-6.00	Peak
2	17445.000	50.37	68.20	-17.83	53.48	-3.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be160_TX_5815MHz
Test By :Brook Cheng

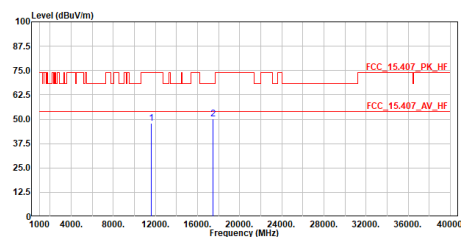

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11630.000	48.02	74.00	-25.98	54.02	-6.00	Peak
2	17445.000	50.05	68.20	-18.15	53.16	-3.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.