



FCC Test Report

FCC Part 90

Report Reference No.: HK2409265637-7E

FCC ID : 2ALPX-OPYNMULTIPIB

Compiled by
(position+printed name+signature) .: Testing Engineer Len Liao

Len Liao

Supervised by
(position+printed name+signature) .: Technical Manager Sliver Wan

Sliver Wan

Approved by
(position+printed name+signature) .: Authorized Signatory Jason Zhou

Jason Zhou

Date of issue: Oct. 30, 2024

Testing Laboratory Name.....: Shenzhen HUAKE Testing Technology Co., Ltd.

Address: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name: Advanced Electronic Solutions Global Ltd.

Address: Unit 4C, Kilcronagh Business Park Cookstown County Tyrone, United
Kingdom

Test specification

Standard.....: FCC Part 90

Shenzhen HUAKE Testing Technology Co., Ltd.All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd.as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd.takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Opyn Multi

Trade Mark.....: AES

Manufacturer: Advanced Electronic Solutions Global Ltd.

Model/Type reference: OPYN-MULTI-IP-IB

Series Models: N/A

Ratings: DC 12V From DC Power or DC 48V From POE Power

Modulation: QPSK, 16QAM

Hardware version.....: V2.0

Software version: V2.0

Frequency: LTE Band 18

Result: **PASS**

**TEST REPORT****Test Report No. :****HK2409265637-7E**

Oct. 30, 2024

Date of issue

Equipment under Test : Oryn Multi

Model /Type : OPYN-MULTI-IP-IB

Series Models : N/A

Applicant : Advanced Electronic Solutions Global Ltd.Address : Unit 4C, Kilcronagh Business Park Cookstown
County Tyrone, United Kingdom**Manufacturer : Advanced Electronic Solutions Global Ltd.**Address : Unit 4C, Kilcronagh Business Park Cookstown
County Tyrone, United Kingdom**Test result****Pass**

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Table of Contents

1. Summary	5
1.1 Test Standards.....	5
1.2 Test Description.....	6
2. EUT Description	7
3. General Information.....	8
3.1. Test environment and mode.....	8
3.2. Test Mode.....	9
3.3. Description of Support Units.....	9
3.4. Configuration of Tested System	10
3.5. Measurement Results Explanation Example.....	10
3.6. Equipments Used during the Test	11
4. Facilities and Accreditations	12
4.1. Information of The Test Laboratory	12
4.2. Measurement Uncertainty.....	12
5. Test Results and Measurement Data	13
5.1. Conducted Output Power Measurement	13
5.2. Radiated Output Power.....	15
5.3. Peak to Average Ratio.....	17
5.4. 99% Occupied Bandwidth and 26dB Bandwidth Measurement	19
5.5. Band Edge and Conducted Spurious Emission Measurement	21
5.6. Frequency Stability Measurement	29
6. Test Setup Photos of the EUT	31
7. Photos of the EUT.....	32



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Oct. 30, 2024	Jason Zhou



1. Summary

1.1 Test Standards

The tests were performed according to following standards:

[FCC Part 90](#): PRIVATE LAND MOBILE RADIO SERVICES

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment
Measurement and Performance Standards.

47 CFR FCC Part 15 Subpart B: - Unintentional Radiators

[KDB 971168 D01 v03r01](#): Measurement Guidance For Certification Of Licensed Digital
Transmitters



1.2 Test Description

Requirement	CFR 47 Section	Result
Conducted Output Power	§2.1046; §90.635;	PASS
Effective(Isotropic) Radiated Output Power	§2.1046; §90.635;	PASS
Peak-to-Average Ratio	§2.1046;	PASS
Effective Radiated Power	§2.1046; §90.635;	PASS
Occupied Bandwidth	§2.1049;	PASS
Band Edge	§2.1051; §90.691	PASS
Conducted Spurious Emission	§2.1051; §90.691	PASS
Field Strength of Spurious Radiation	§2.1053; §90.691	PASS
Frequency Stability for Temperature & Voltage	§2.1055; §90.231	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.



2. EUT Description

Product Name:	Opyn Multi
Model :	OPYN-MULTI-IP-IB
Series Models:	N/A
Model Difference:	N/A
Trade Mark:	AES
Tx Frequency:	LTE Band 18: 815 MHz ~ 824 MHz
Bandwidth:	LTE Band 18: 5MHz
Type of Modulation:	QPSK/16QAM
Antenna Type:	External Antenna
Antenna Gain:	2.5dBi
Power Supply:	DC 12V From DC Power or DC 48V From POE Power
Note: 1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2. Antenna gain Refer to the antenna specifications. 3. The cable loss data is obtained from the supplier. 4. The test results in the report only apply to the tested sample.	



3. General Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation
The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

Description Operation Frequency

LTE Band 18(5MHz)	
Channel	Frequency (MHz)
23875	817.5
23895	819.5
23915	821.5



3.2. Test Mode

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Band	Radiated TCs	Conducted TCs
LTE Band 18	QPSK Link (5MHz)	16QAM Link (5MHz)

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas License Digital Systems v03 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

3.3. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



3.4. Configuration of Tested System

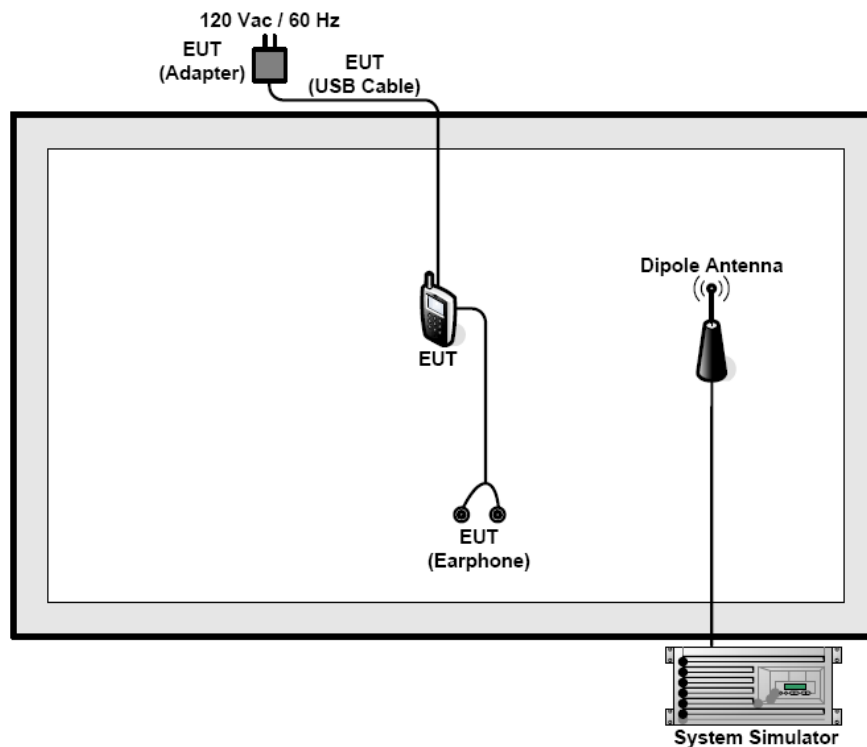

3.5. Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level. The spectrum analyzer offset is derived from RF cable loss and attenuator factor.
Offset = RF cable loss + attenuator factor.



3.6. Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	L.I.S.N.	R&S	ENV216	HKE-002	2024/02/20	2025/02/19
2	L.I.S.N.	R&S	ENV216	HKE-059	2024/02/20	2025/02/19
3	EMI Test Receiver	R&S	ESR	HKE-005	2024/02/20	2025/02/19
4	Spectrum analyzer	Agilent	N9020A	HKE-117	2024/02/20	2025/02/19
5	Spectrum analyzer	R&S	FSV3044	HKE-126	2024/02/20	2025/02/19
6	Preamplifier	EMCI	EMC051845S	HKE-006	2024/02/20	2025/02/19
7	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	2024/02/20	2025/02/19
8	Preamplifier	A.H. Systems	SAS-574	HKE-182	2024/02/20	2025/02/19
9	6d Attenuator	Pasternack	6db	HKE-184	2024/02/20	2025/02/19
10	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	2024/02/20	2025/02/19
11	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	2024/02/21	2026/02/20
12	Loop Antenna	COM-POWER	AL-130R	HKE-014	2024/02/21	2026/02/20
13	Horn Antenna	Schwarzbeck	9120D	HKE-013	2024/02/21	2026/02/20
14	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16	RF Automatic control unit	Tonscend	JS0806-1	HKE-096	2024/02/20	2025/02/19
17	High pass filter unit	Tonscend	JS0806-F	HKE-055	2024/02/20	2025/02/19
18	Wireless Communication Test Set	R&S	CMU200	HKE-026	2024/02/20	2025/02/19
19	Wireless Communication Test Set	R&S	CMW500	HKE-027	2024/02/20	2025/02/19
20	High-low temperature chamber	Guangke	HT-80L	HKE-118	2024/06/10	2025/06/09
21	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2024/06/10	2025/06/09
22	RF Test Software	Tonscend	JS1120 Version 3.1.46	HKE-183	/	/
23	RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



4. Facilities and Accreditations

4.1. Information of The Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization :

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

4.2. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)


- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. Test Results and Measurement Data

5.1. Conducted Output Power Measurement

5.1.1. Test Specification

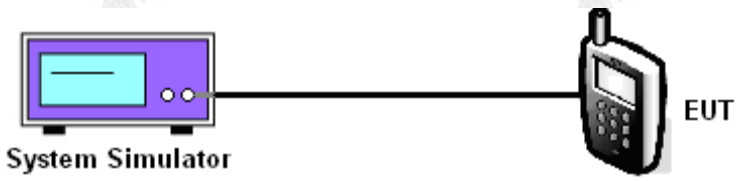Test Requirement:	FCC part 90.635
Test Method:	FCC part 2.1046
Limits:	LTE Band 18: 100W
Test Setup:	 <p>The diagram illustrates the test setup. On the left is a purple rectangular box labeled 'System Simulator' with a blue screen and two small circles. A black line connects this box to a black mobile phone on the right labeled 'EUT'.</p>
Test Procedure:	<ol style="list-style-type: none">1. The transmitter output port was connected to the system simulator.2. Set EUT at maximum power through system simulator.3. Select lowest, middle, highest channels for each band and different modulation.4. Measure and record the power level from the system simulator.
Test Result:	PASS

TEST RESULTS

**Conducted Measurement:**

<i>LTE FDD Band 18</i>				
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	Average Power [dBm]	
			QPSK	16QAM
5 MHz	1 RB low	817.5	23.64	22.80
		819.5	23.95	22.50
		821.5	23.96	22.66
	1 RB high	817.5	22.76	21.78
		819.5	22.70	21.83
		821.5	22.79	21.83
	50% RB mid	817.5	22.67	21.72
		819.5	23.74	22.52
		821.5	23.64	22.72
	100% RB	817.5	23.69	22.52
		819.5	22.58	21.60
		821.5	22.74	21.54




5.2. Radiated Output Power

LIMIT

This is the test for the maximum radiated power from the EUT. Rule Part 90 specifies, "The maximum output power of the transmitter for mobile stations is 100 watts."

TEST CONFIGURATION

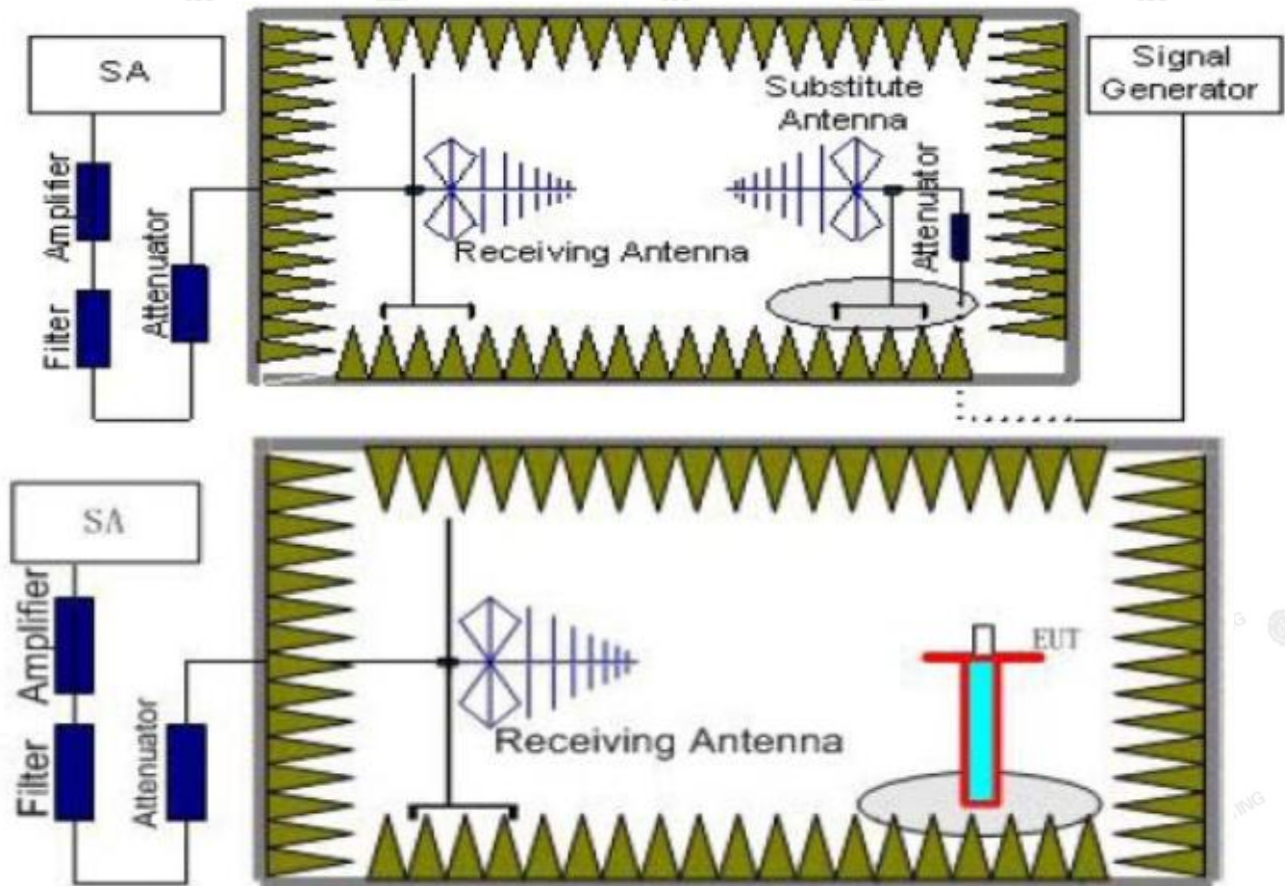

TEST PROCEDURE

1. EUT was placed on a 0.1 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.1m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.



- The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
- The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below: $\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power

Amplifier for substitution test; The measurement results are amend as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{cl} + G_a$$

- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

TEST RESULTS

Radiated Measurement:

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 18; recorded worst case for each Channel Bandwidth of LTE FDD Band 18.
- $\text{EIRP} = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
- $\text{Margin} = \text{Limit} - \text{ERP}$
- We measured both Horizontal and Vertical direction, recorded worst case direction.

LTE FDD Band 18_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
817.5	-17.4	2.42	8.45	36.82	25.45	23.3	50.00	26.7	V
819.5	-16.8	2.46	8.45	36.82	26.01	23.86	50.00	26.14	V
821.5	-19.57	2.53	8.36	36.82	23.08	20.93	50.00	29.07	V


LTE FDD Band 18_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
817.5	-17.92	2.42	8.45	36.82	24.93	22.78	50.00	27.22	V
819.5	-17.3	2.46	8.45	36.82	25.51	23.36	50.00	26.64	V
821.5	-17.37	2.53	8.36	36.82	25.28	23.13	50.00	26.87	V



5.3. Peak to Average Ratio

5.3.1. Test Specification

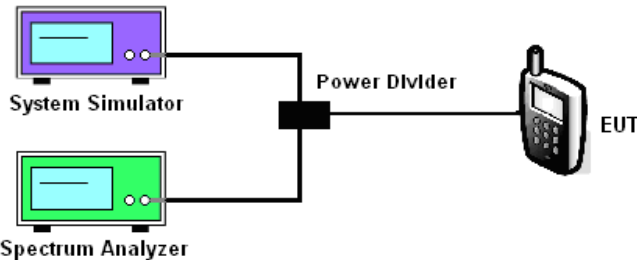Test Method:	FCC KDB 971168 D01v03
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test Setup:	
Test Procedure:	<ol style="list-style-type: none">1. The testing follows FCC KDB 971168 D01v03 Section 5.7.1.2. The EUT was connected to spectrum analyzer and system simulator via a power divider.3. Set EUT to transmit at maximum output power.4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.
Test Result:	PASS

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 18; recorded worst case for each Channel Bandwidth of LTE FDD Band 18.



LTE FDD Band 18				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
5 MHz	817.5	1RB#0	4.61	5.55
	819.5		4.67	5.59
	821.5		4.72	5.57





LTE FDD Band 18-5MHz Channel Bandwidth PAPR

QPSK



16QAM

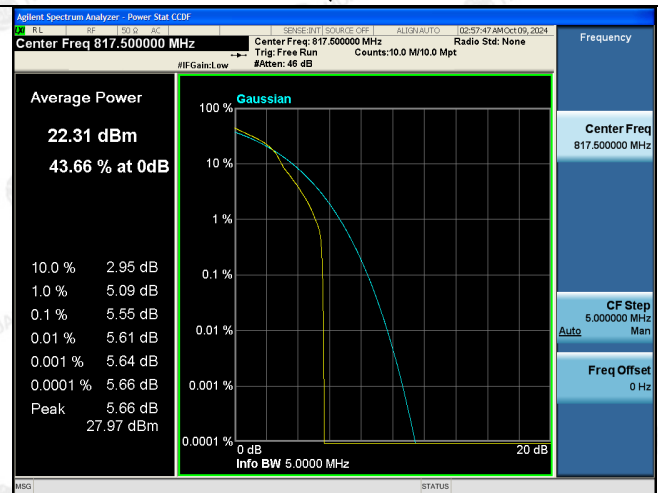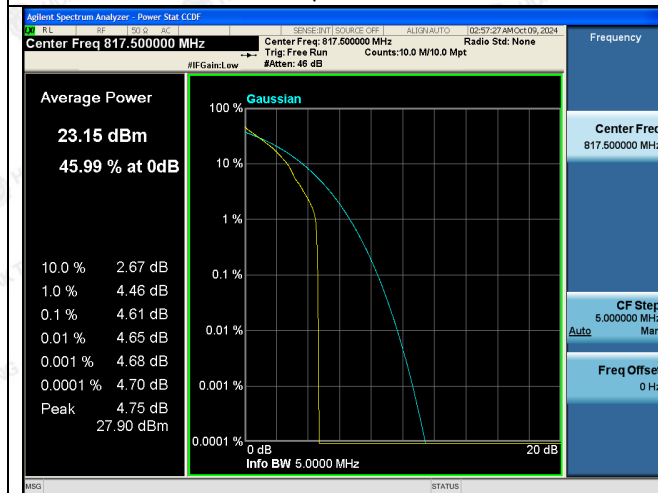

Low Channel

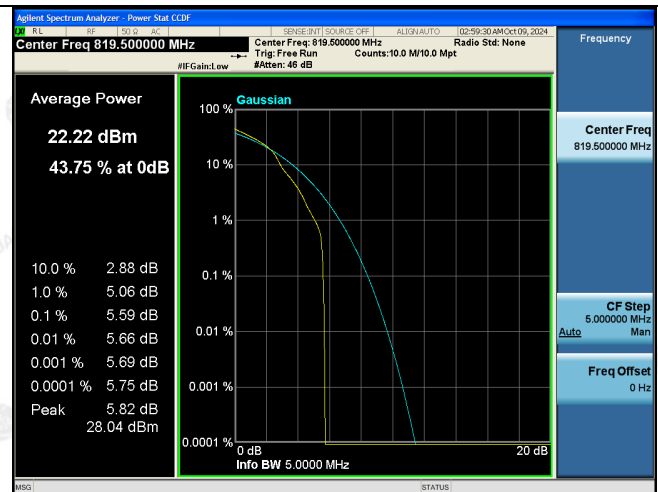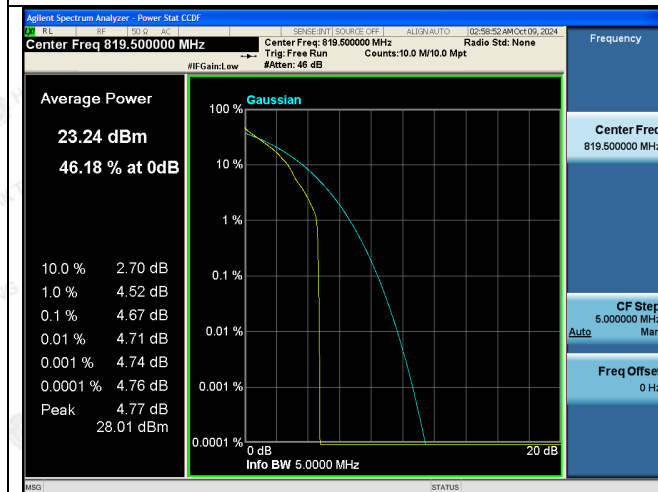

Middle Channel

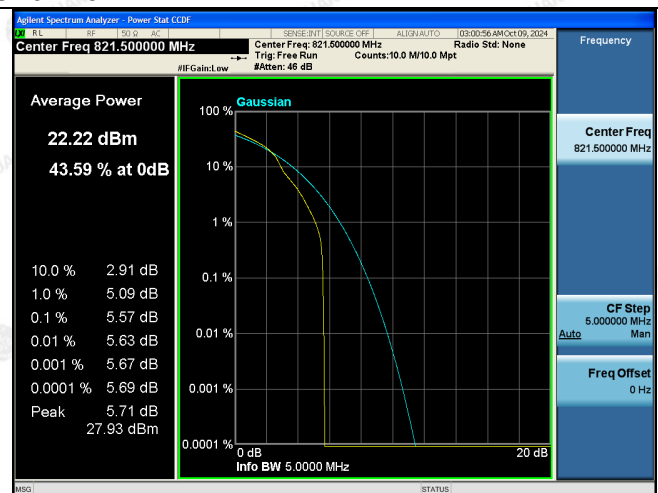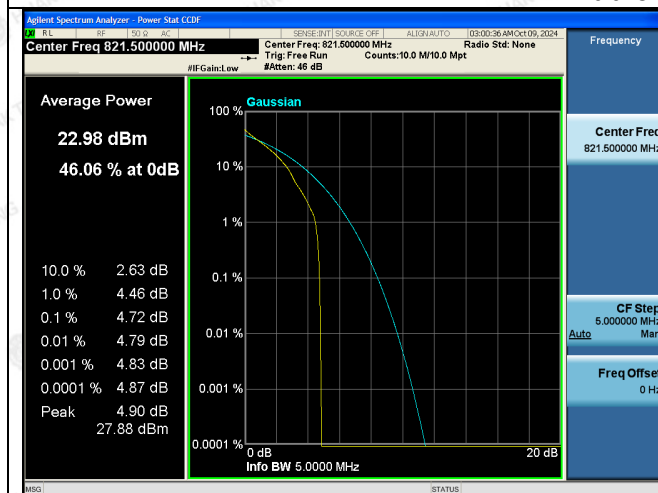


High Channel



5.4. 99% Occupied Bandwidth and 26dB Bandwidth Measurement

5.4.1. Test Specification

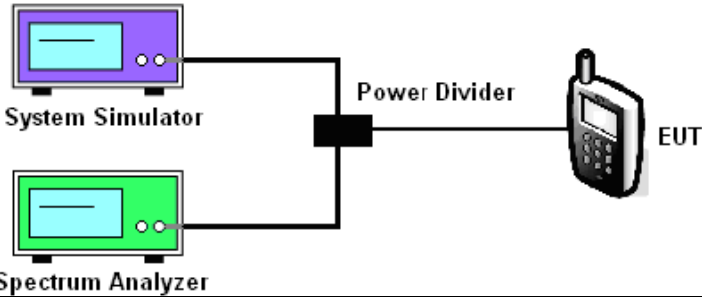Test Method:	FCC part 2.1049
Limit:	N/A
Test Setup:	 <p>The diagram shows a System Simulator (purple box) and a Spectrum Analyzer (green box) connected to a Power Divider (black box). The Power Divider is connected to the EUT (Equipment Under Test, a mobile phone icon).</p>
Test Procedure:	<ol style="list-style-type: none">1. The testing follows FCC KDB 971168 D01v03 Section 4.2.2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.4. The 99% occupied bandwidth were measured, set RBW= 1% of OBW, VBW= 3*RBW, sample detector, trace maximum hold.5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.
Test Result:	PASS

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 18; recorded worst case for each Channel Bandwidth of LTE FDD Band 18.

LTE FDD Band 18						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
5 MHz	25RB#0	817.5	4.997	5.011	4.4943	4.5102
		819.5	5.006	5.048	4.5036	4.5201
		821.5	5.022	4.986	4.5093	4.5013



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



5.5. Band Edge and Conducted Spurious Emission Measurement

5.5.1. Test Specification

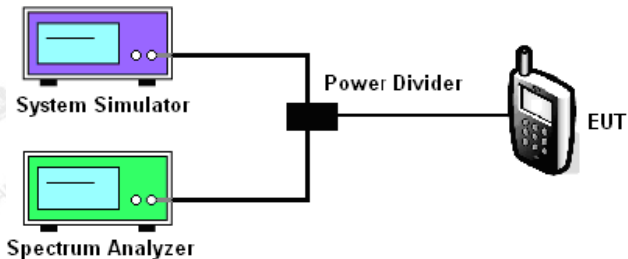Test Requirement:	FCC part 90.691
Test Method:	FCC part 2.1051
Limit:	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
Test Setup:	 <p>The diagram shows a System Simulator (purple box) and a Spectrum Analyzer (green box) connected to a Power Divider (black box). The Power Divider is also connected to the EUT (Equipment Under Test, represented by a mobile phone icon).</p>
Test Procedure:	<ol style="list-style-type: none">1. The testing follows FCC KDB 971168 D01v03 Section 6.0.2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.4. The band edges of low and high channels for the highest RF powers were measured.5. The conducted spurious emission for the whole frequency range was taken.6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

TEST RESULTS

Remark:



1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 18; recorded worst case for each Channel Bandwidth of LTE FDD Band 18.



LTE FDD Band 18-5MHz Channel Bandwidth Band Edge Compliance

QPSK



16QAM

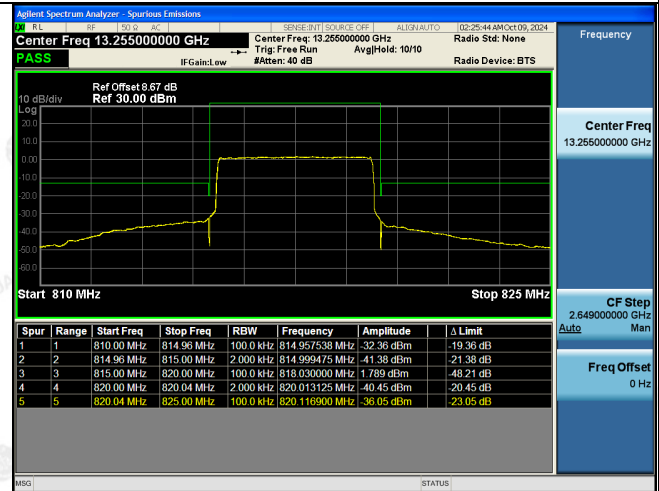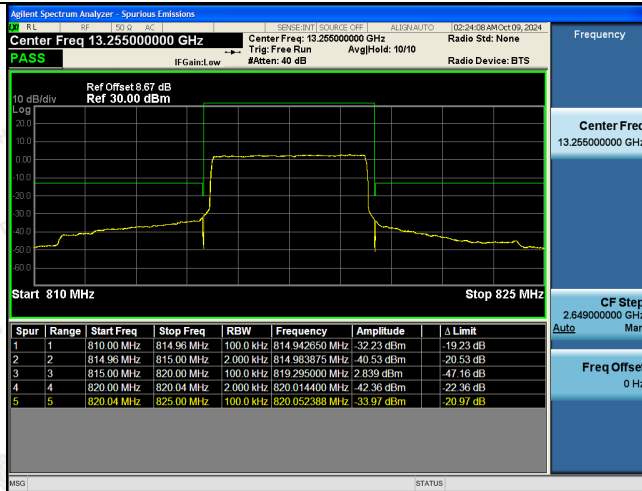

25RB#0

25RB#0

Low Channel

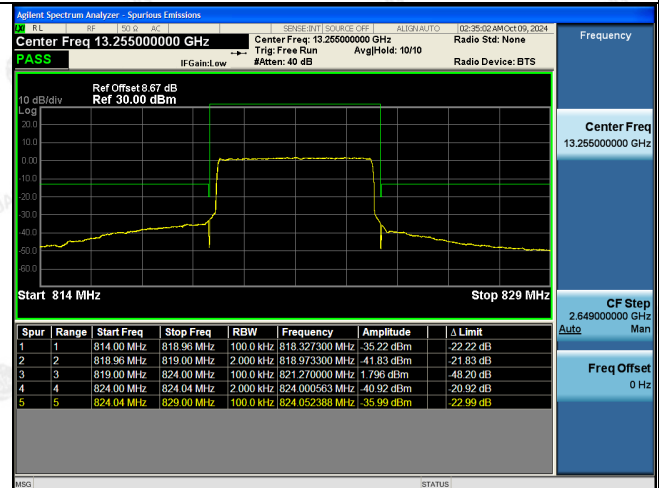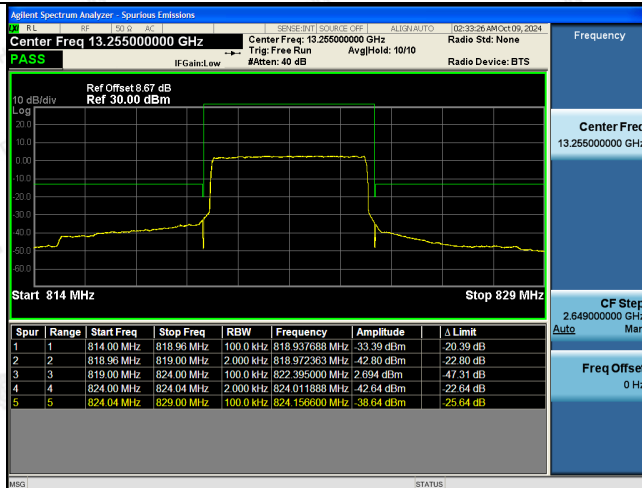

25RB#0

25RB#0

High Channel




Conducted Measurement:


LTE FDD Band 18-5MHz Channel Bandwidth

Low Channel


QPSK

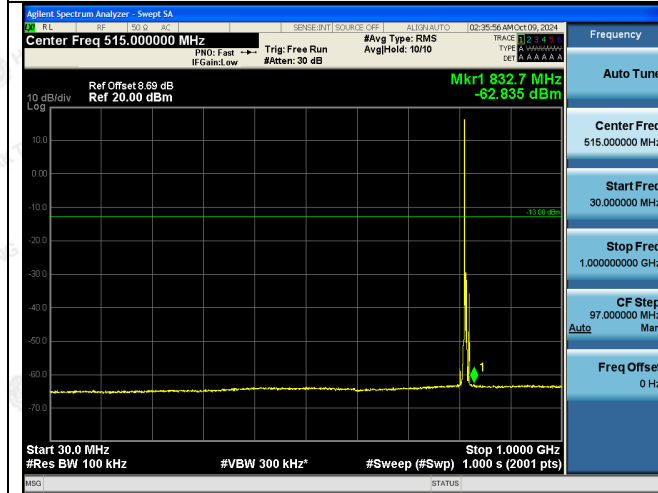


16QAM

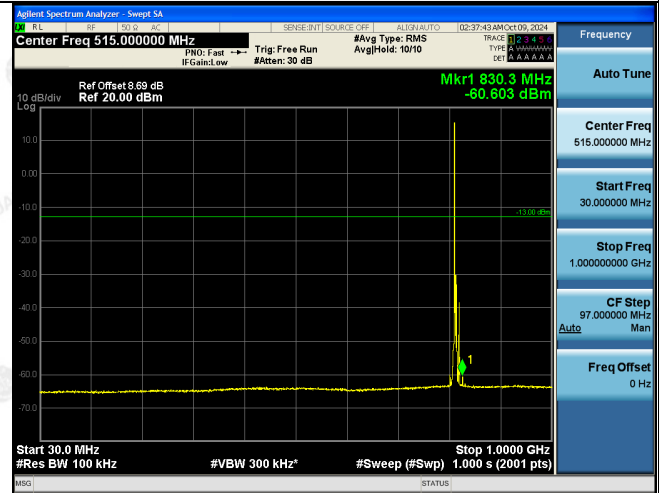


30MHz~1GHz

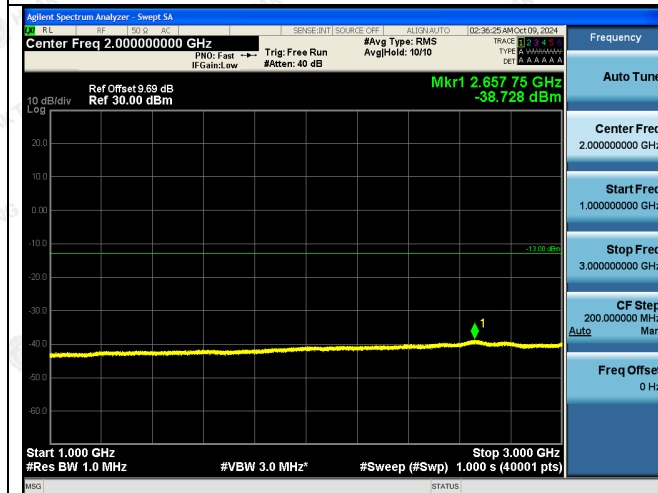


30MHz~1GHz

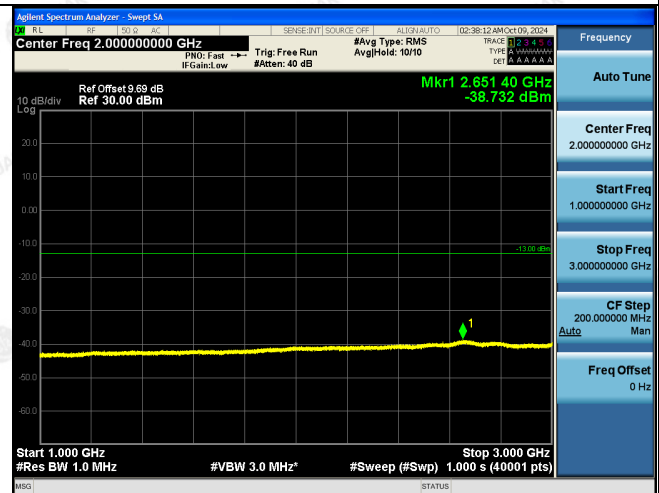

1GHz~3GHz

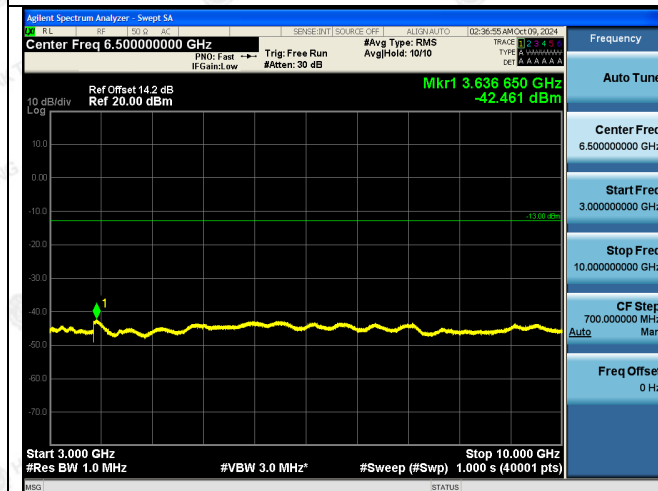

1GHz~3GHz

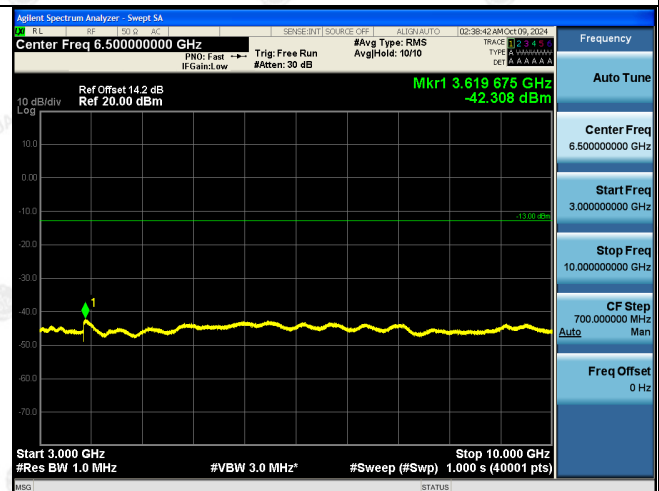

3GHz~10GHz

1RB#0

3GHz~10GHz

1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 18-5MHz Channel Bandwidth Middle Channel


QPSK

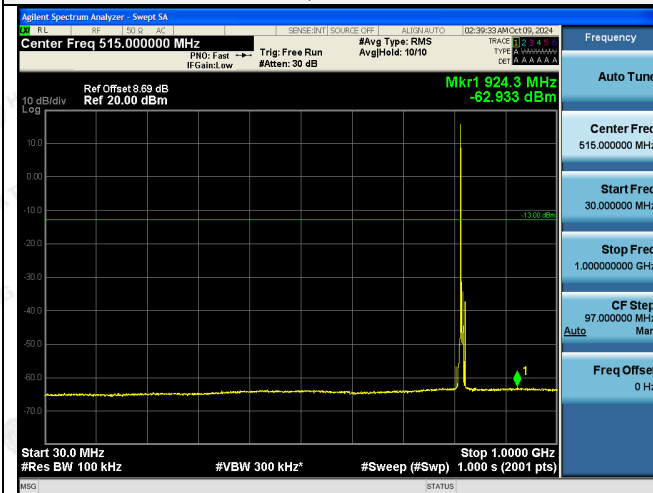

16QAM

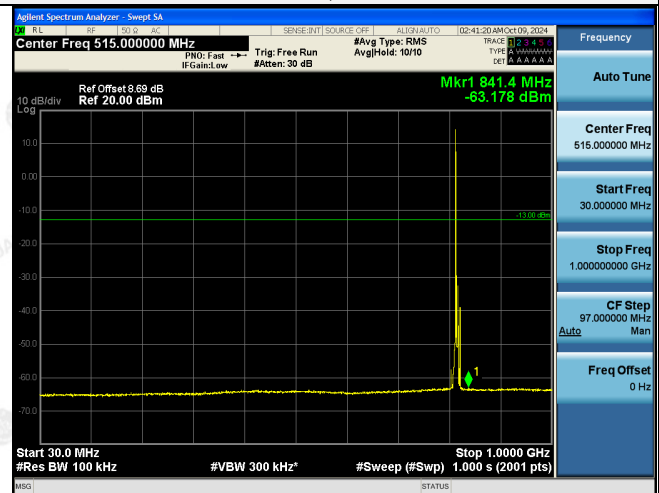


30MHz~1GHz

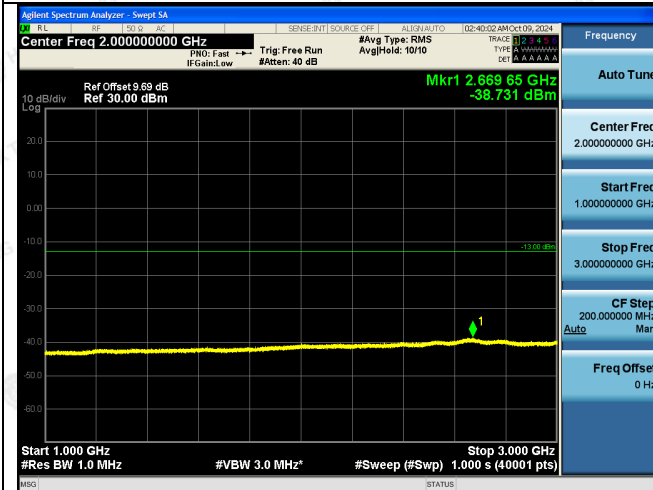


30MHz~1GHz



1GHz~3GHz

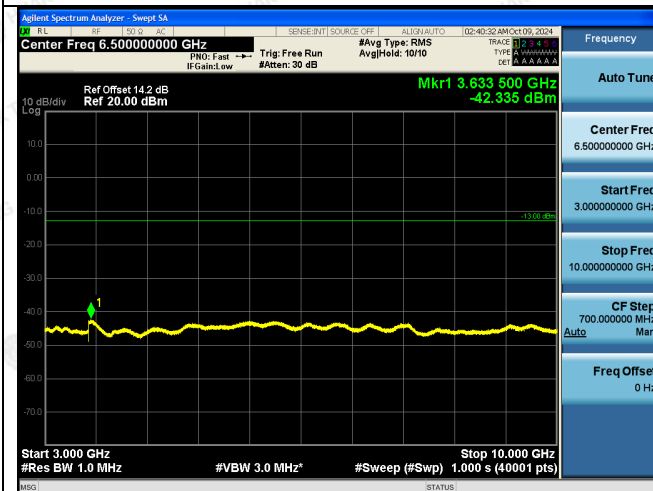

1GHz~3GHz

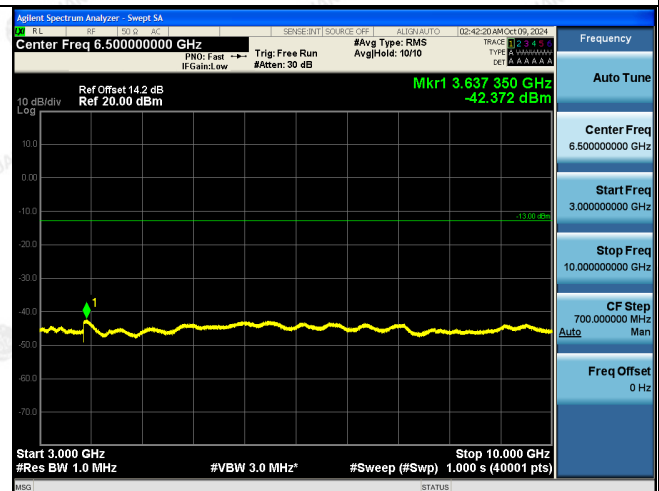

3GHz~10GHz

1RB#0


3GHz~10GHz

1RB#0




LTE FDD Band 18-5MHz Channel Bandwidth High Channel


QPSK

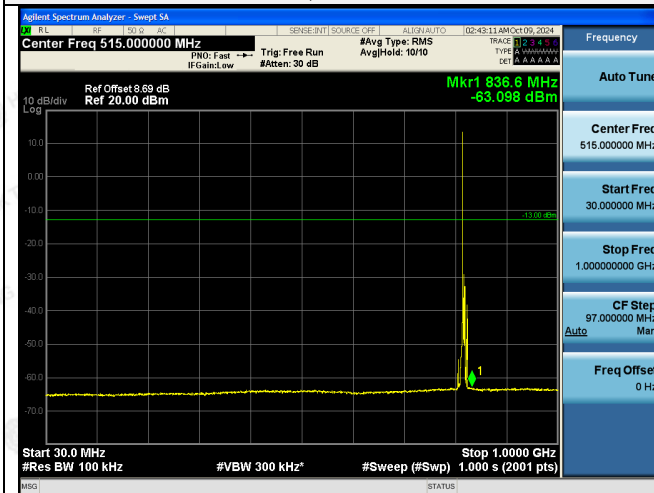

16QAM

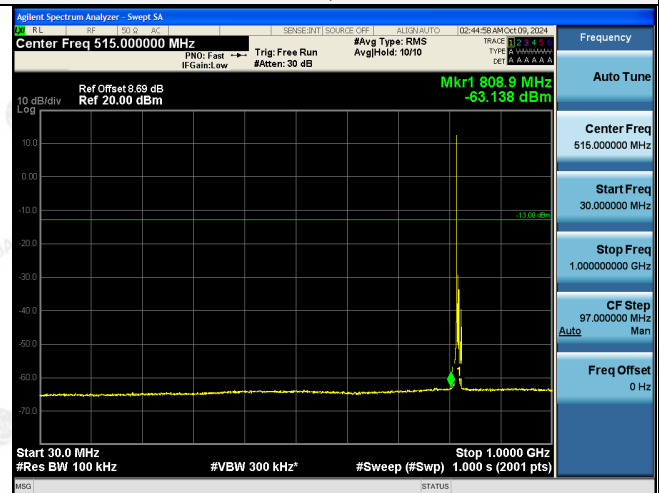


30MHz~1GHz

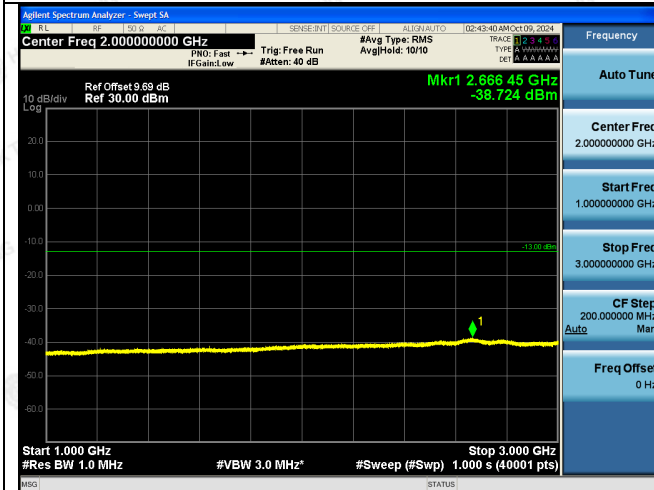


30MHz~1GHz



1GHz~3GHz

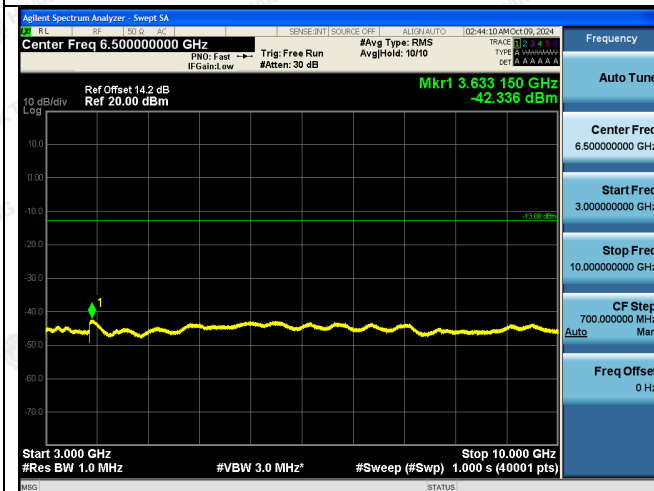

1GHz~3GHz

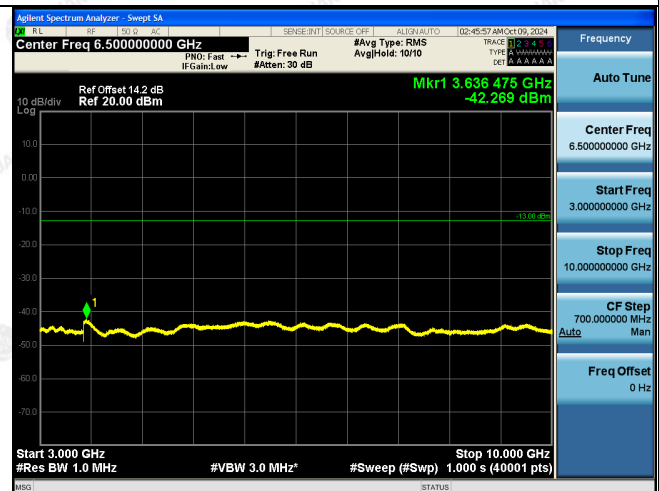

3GHz~10GHz

1RB#0



3GHz~10GHz

1RB#0



Field Strength of Spurious Radiation Measurement

5.5.2. Test Specification

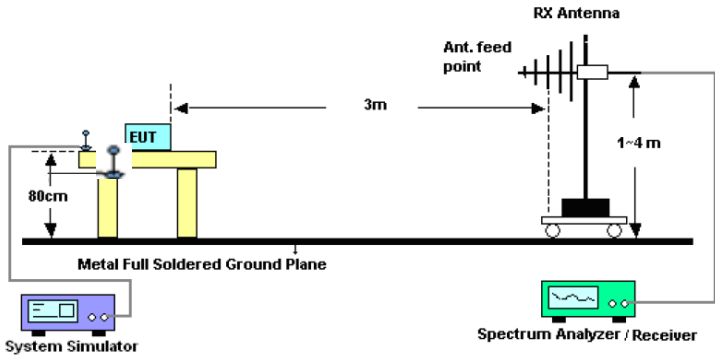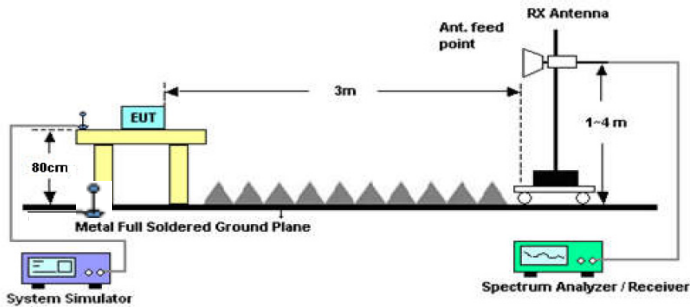Test Requirement:	FCC part90.691
Test Method:	FCC part 2.1053
Limit:	30MHz~20GHz -13dBm
Test setup:	<p>From 30MHz to 1GHz</p>  <p>Above 1GHz</p> 
Test Procedure:	<ol style="list-style-type: none">1. The testing follows FCC KDB 971168 D01v03 Section 5.8 and ANSI / TIA-603-D-2010Section 2.2.12.2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.4. The table was rotated 360 degrees to determine the position of the highest spurious emission.5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.



	6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission. 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. 9. Taking the record of output power at antenna port. 10. Repeat step 7 to step 8 for another polarization. 11. $EIRP(dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$ 12. $ERP(dBm) = EIRP - 2.15$ 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test results:	PASS

Radiated Measurement:*Remark:*

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 18; recorded worst case for each Channel Bandwidth of LTE FDD Band 18.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4. $Margin = Limit - EIRP$

LTE FDD Band 18_Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1635.0	-36.24	2.86	3.00	7.25	-34	-13.00	21	H
2452.5	-42.08	2.94	3.00	9.53	-37.64	-13.00	24.64	H
1635.0	-45.73	2.86	3.00	7.25	-43.49	-13.00	30.49	V
2452.5	-47.9	2.94	3.00	9.53	-43.46	-13.00	30.46	V

LTE FDD Band 18_Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1639.0	-33.97	2.86	3.00	7.25	-31.73	-13.00	18.73	H
2458.5	-40.53	2.94	3.00	9.53	-36.09	-13.00	23.09	H
1639.0	-41.97	2.86	3.00	7.25	-39.73	-13.00	26.73	V
2458.5	-48.61	2.94	3.00	9.53	-44.17	-13.00	31.17	V

**LTE FDD Band 18_Channel Bandwidth 5MHz_QPSK_High Channel**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1643.0	-40.93	2.86	3.00	7.25	-38.69	-13.00	25.69	H
2464.5	-43.48	2.94	3.00	9.53	-39.04	-13.00	26.04	H
1643.0	-49.77	2.86	3.00	7.25	-47.53	-13.00	34.53	V
2464.5	-53.46	2.94	3.00	9.53	-49.02	-13.00	36.02	V

LTE FDD Band 18_Channel Bandwidth 5MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1635.0	-35.32	2.86	3.00	7.25	-33.08	-13.00	20.08	H
2452.5	-44.31	2.94	3.00	9.53	-39.87	-13.00	26.87	H
1635.0	-45.14	2.86	3.00	7.25	-42.9	-13.00	29.9	V
2452.5	-48.67	2.94	3.00	9.53	-44.23	-13.00	31.23	V

LTE FDD Band 18_Channel Bandwidth 5MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1639.0	-34.52	2.86	3.00	7.25	-32.28	-13.00	19.28	H
2458.5	-40.62	2.94	3.00	9.53	-36.18	-13.00	23.18	H
1639.0	-40.92	2.86	3.00	7.25	-38.68	-13.00	25.68	V
2458.5	-49.21	2.94	3.00	9.53	-44.77	-13.00	31.77	V


LTE FDD Band 18_Channel Bandwidth 5MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1643.0	-40.12	2.86	3.00	7.25	-37.88	-13.00	24.88	H
2464.5	-44.2	2.94	3.00	9.53	-39.76	-13.00	26.76	H
1643.0	-49.48	2.86	3.00	7.25	-47.24	-13.00	34.24	V
2464.5	-52.94	2.94	3.00	9.53	-48.5	-13.00	35.5	V



5.6. Frequency Stability Measurement

5.6.1. Test Specification

Test Requirement:	FCC part 90.213
Test Method:	FCC Part 2.1055
Limit:	±2.5 ppm
Test Setup:	 <p>The diagram shows a 'System Simulator' connected by a line to a 'Thermal Chamber'. Inside the 'Thermal Chamber' is a device labeled 'EUT'.</p>
Test Procedure:	<p>Test Procedures for Temperature Variation</p> <ol style="list-style-type: none">1. The testing follows FCC KDB 971168 D01v03 Section 9.0.2. The EUT was set up in the thermal chamber and connected with the system simulator.3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute. <p>Test Procedures for Voltage Variation</p> <ol style="list-style-type: none">1. The testing follows FCC KDB 971168 D01v03 Section 9.0.2. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.4. The variation in frequency was measured for the worst case.
Test Result:	PASS

**TEST RESULTS**

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 18; recorded worst case.

LTE Band 18, 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
10.2	-3.95	-3.43	-0.004832	-0.004196	2.50
12	-3.08	-3.73	-0.003768	-0.004563	2.50
13.8	-2.66	-2.06	-0.003254	-0.002520	2.50


Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
-30°	-1.83	1.76	-0.002233	0.002148	2.50
-20°	-1.69	-3.03	-0.002062	-0.003697	2.50
-10°	-1.93	-2.47	-0.002355	-0.003014	2.50
0°	-1.79	-1.75	-0.002184	-0.002135	2.50
10°	-2.49	-2.75	-0.003038	-0.003356	2.50
20°	1.66	-1.37	0.002026	-0.001672	2.50
30°	-3.15	1.06	-0.003844	0.001293	2.50
40°	-1.32	1.72	-0.001611	0.002099	2.50
50°	-1.44	-2.17	-0.001757	-0.002648	2.50



6. Test Setup Photos of the EUT

Radiated Emission

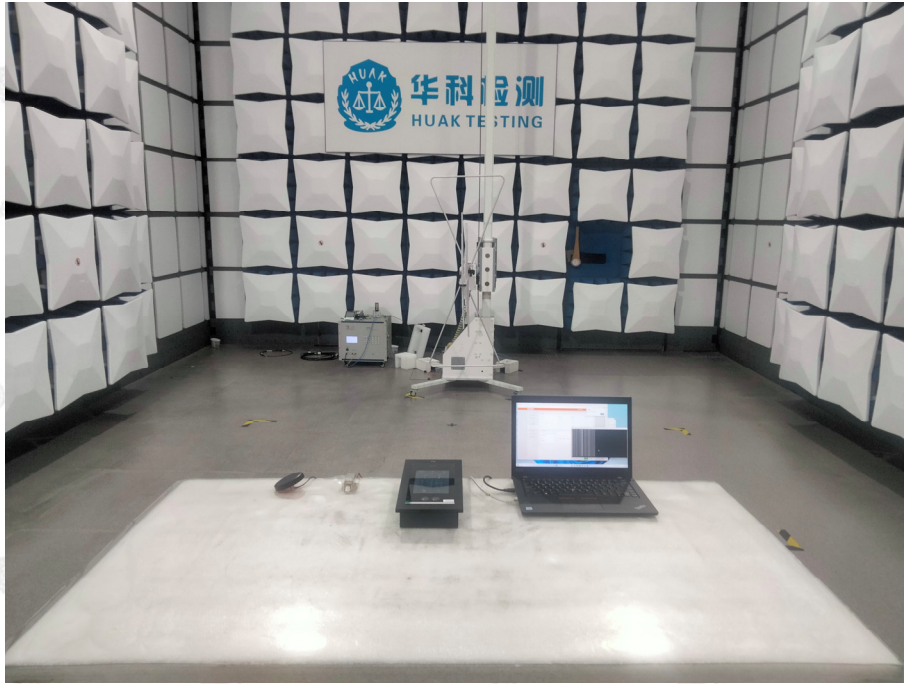

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



7. Photos of the EUT

Refer to test report ANNEX A of external photos and ANNEX B of internal photos

.....**End of Report**.....