

Product specification

Quick Reference Data


	Antenna module on the system board	
Frequency	2402-2480 MHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-2.3 (Input pwr – loss pwr)	
Peak EIRP(dBm)	0	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	-2.3 (58.5%)	
Gain (dBi)	0	
Maximum Power (dBm)	1.3 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Max/Min Ratio (dB)	5.3(XY-plane)	
Max/Avg Ratio (dB)	1.8(XY-plane)	
Min/Avg Ratio (dB)	-3.5(XY-plane)	
Average Gain (dB)	-3.0 (Avg Gain XY-plane)	

All the technical data and information contained herein are subject to change without prior notice





Antenna Gain Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	-0.5	-3.5	0	-3.8	-0.3	-3.0	58.5%

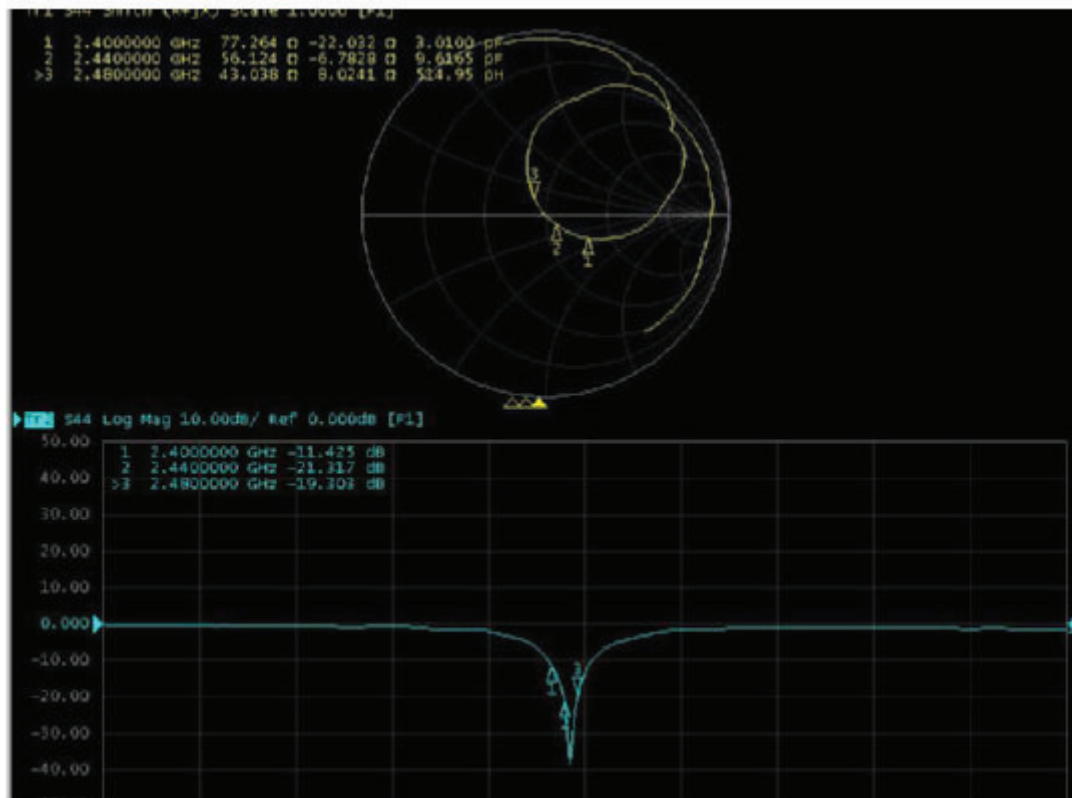


Return Loss

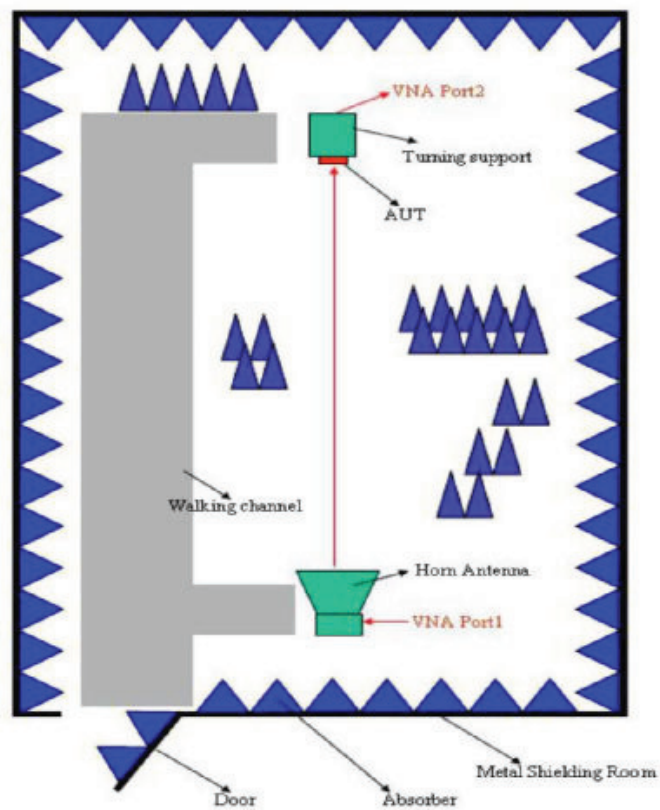

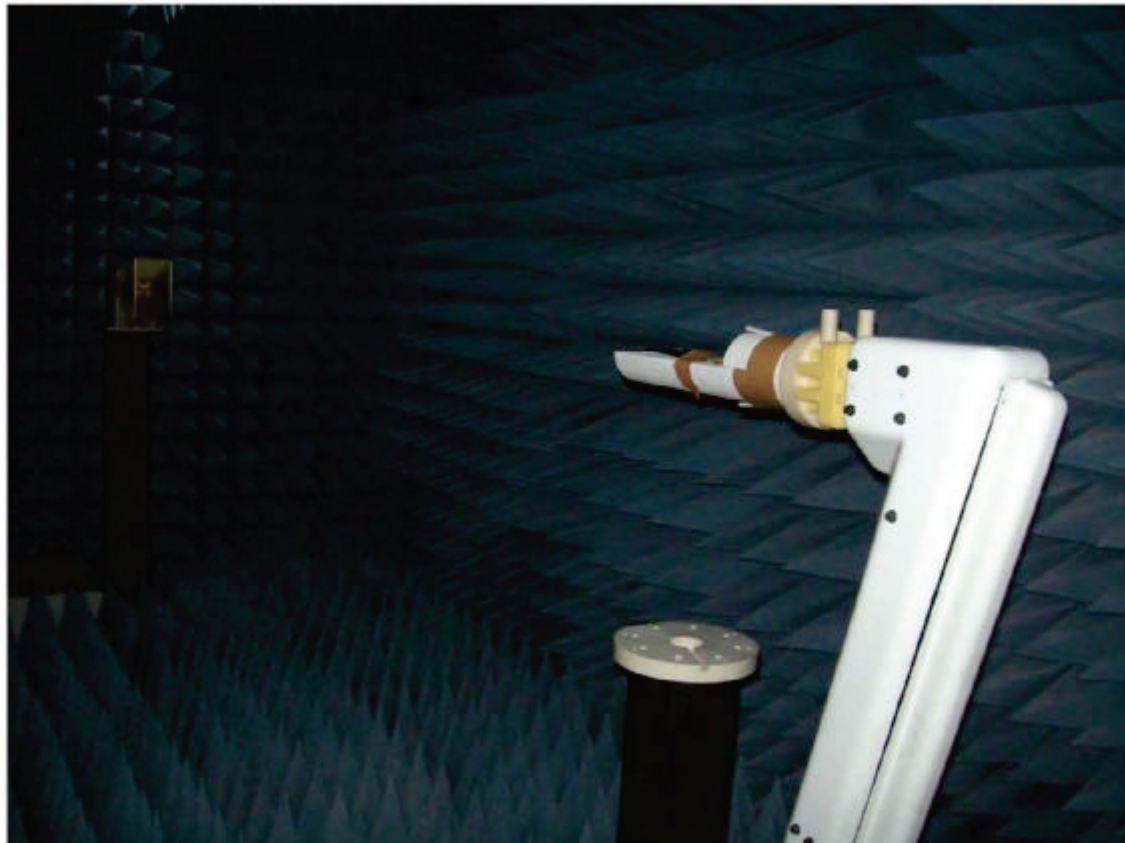

The Environment of Antenna Radiation Pattern

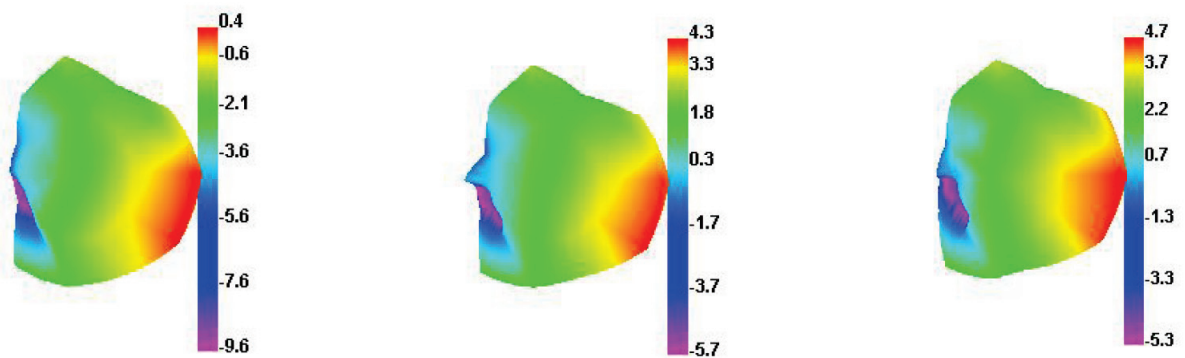

3D radiation pattern diagram

Manufacturer: Xingsheng Electronics Co., Ltd

Address: 1-3/F, Building A, Tianyou Industrial park, Fuyong Street, Bao'an District, Shenzhen.