
成型尺寸: 65x100mm

128g双铜纸,印4C,表面过光油,折页





1	Battery Cover	Slide open	
2	VOCOlinc LED	Unlocked-Green; Locked/Jammed-Red	
3	Lock key	Lock/Clear wrong entry	
4	Touchpad	Passcodes entry; lock/unlock; factory reset	
5	Unlock key	Unlock/Wakeup keypad	
6	Turning Piece	Lock/unlock	

Buzzer & LED Indicator Status

Action	Backlight Status	Buzzer
Power on	All lights on	Beeps once
Factory reset	n/a	Continuous beeping until it is completed
Identify	Red&green lights on interchangeably twice then off	Beeps twice
Unlock	Green light blinks once	Beeps once
Lock	Red light blinks once	Beeps once
Wakeup keypad	All lights on	n/a
Tap key	Key light blinks once	Beeps once
Jammed	Red light blinks twice	Beeps once
Error password 4 times (keypad locked)	All lights off and keypad shuts down for 60s	n/a
Keypad stand-by	All lights off	n/a

Features:

Siri Control

- Works with Apple HomeKi
- Remote Access (Apple TV [Gen. 4].
- Multi-user management
- Activity tracking Auto-lock

What's in the box?

- Entry Keys (2) Installation Guide
- Quick Start Guide

Electrical Ratings

4 x AA high-capacity Alkaline batteries (purchased seperately)

Setup Guide

1. Factory Resetting

- Within 15 seconds immediately after inserting the batteries, enter 1234+" "h". Once completed, the lock reboots. You should hear a long beeping sound coming from
- NOTE: DO NOT nower off until operation is restored after factory reset 2. Turn on Bluetooth of your iOS device
- 3 Download and open the VOCOlinc ann. Tap "+ " icon on the mainpage and
- follow the on-screen directions to complete setup.

4. You will be asked to scan the setup code or manually enter the setup code. The setup code is a OR code located on the interior cover

5. Select the device from the accessory list. Each accessory has a unique identification code

consistent with the last 6 characters of MAC on the top of the battery holder.

6. If the screen shows "Couldn't add VOCOlinc-XXX-XXXXXX", please factory reset the

product and then retap "+ " icon on the mainpage. DO NOT lose the setup code.

Press & hold the " "h" key until you hear the beeping sound or see the backlight

After 4 incorrect code attempts, the backlight will be turned off and the keypad will

Settings > iCloud > iCloud Drive > Turn On

Using the Touchscreen Keypad

Wake up Touchscreen Keypad

temporarily shut down for 60 seconds.

Fast Locking Wake up Keypad and Tap " A" key

Secure Locking

Settings > Privacy > HomeKit > VOCOlinc > Turn On

Settings > iCloud > Keychain > Turn On


e.g., VOCOlinc-XXX-XXXXXX Make sure the last 6 characters of the identification code is

7. You can name your device and refer to it when speaking to Siri. For example, if you name

your device "Front Door", you may wake up Siri and say "Lock/unlock my front door"

Home Screen


The VOCOlinc App



Firmware Update


To gain better experience with VOCOlinc product, we strongly recommend that you undate firmware whenever updates with all the latest improvement and fixes are available:

- 1. Open the VOCOlinc app.
- 2 Make sure your iPhone/iPad has been connetted to wireless network and your product
- 3. You will be promt a message of the update whenever the update is available.
- 4. Tap the "update" to begin.





Authorization

Create up to 30 passcodes and share with your family, friends or a dog watcher for ultimate convenience. You can set Always, Recurring, Temporary, Once. Enter the authorization page

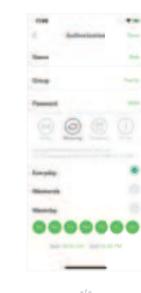

Organize your users into groups so that you find them easily.

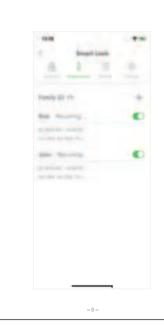

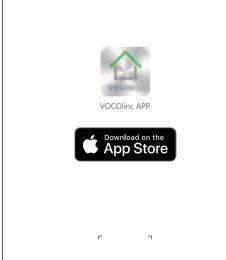





Settings

Turning on this mode means all user author

Administartor Only Access

Touch Sensitivity

3. If the app prompts "Couldn't add VOCOlinc-XXX-XXXXXXX" after scanning the setup code:

(1) Close the app

(2) Reboot the phone

(4) Add the accessory again

(2) If the last 6 characters of the identification code is not consistent with the last 6 characters

of MAC on the top of the battery holder, please report this issue by sending a message to support@vocolinc.com along with the last 6 characters of the identification code.

Yes, You need to use Apple TV [Gen. 4], iPad, or HomePod as a hub.

NOTE: Please turn off the "standby mode" when Apple TV is used as a hub.

Q3. What should I do if the lock is not responding?

connectivity range (best within 20 feet).

2. If touch keypad become inactive:

battery holder.

(2) Check if the battery level is low. If so, change with new batteries and try turning on/off

(3) Check if the the cable from the exterior assembly connects correctly with interior cover During trouble shooting, use entry keys as a temporary alternative.

O4. The lock fails to lock/unlock when the connection is on.

1. If low power warning shows on the screen, please immediately change batteries. 2. DO NOT mix old batteries with the new ones nor different brands.

O5. I am not able to add/change the passcode? What went wrong?

1. If the screen shows "This accessory is unreachable", please ensure your iOS device is

within connectivity range from your product (best within 20 feet). 2. If you are a invitee, please ask the Administrator to turn off "Administrator Only

O6. Why does the touch keypad become inactive?

1. Wait for 1 minite and then press and hold " 🖰 " key to activate keypad. Your product might be secure-locked after 4 incorrect passcode inputs.

2. If the backlight is stays on, please check if the the cable from the exterior assembly connects correctly with interior cover.

Q7. Why is my T Guard keeps showing "jammed" on the app?

1. Please check the door is completely closed.

3. Please check the lock is installed properly according to the Installation Guide.

Once the above is done, the "jammed" sign will be removed after 1 cycle of lock an unclock by App.

System Requirement:

- Sunnort Bluetooth v4.2

FCC Declaration

Caution:

device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

This equipment has been tested and found to comply with the limits for a Class B digital

--Reorient or relocate the receiving antenna

--Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the

-- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC rules. Operation is subject to the followin

(1) This device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

FCC RF Radiation Exposure Statement:

1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter

The device has been evaluated to meet general RE exposure requirement. The device can

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes (1) l'appareil nedoit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement

Radio apparatus containing digital circuitry which can function separately from the operation of a transmitter or an associated transmitter, shall comply with ICES-003. In such cases, the labelling requirements of the applicable RSS apply, rather than the labelling requirements in ICES-003. This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada

ndustry Canada Notice his device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt BSS(s). Operation is subject

to the following two conditions: This device may not cause interference.


2) This device must accept any interference, including interference that may cause indesired operation of the device.

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) l'Innovation. Sciences et Développement économique Canada. Le fonctionnement est soumis au Cet appareil ne doit pas causer d'interférences

Cet appareil doit accepter toutes les interférences, y compris

Apple HomeKit



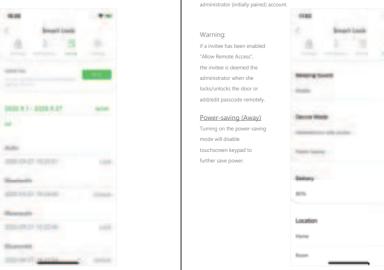

Q1. Why did I fail to add my T Guard to the VOCOlinc app?

1 If the screen shows "Couldn't find the accessory" after scanning the setup code:

(2) Make sure to turn on Bluetooth for your iOS device.

manual mode, then input the setup code (XXX-XXX) which can be found on the interior cover or quick start quide.

(3) Factory reset the produc

4. If the screen shows "The setup code is incorrect", please

(1) Double check whether the setup code input is right or not: or try manually entering the setup code. The setup code can be found on the interior cover or quick start guide .

2. Please check the door gaps for any foreign objects between door and frame.

VOCOlinco

Deadbolt with Touch Screen Keypad

T Guard

Smart Lock