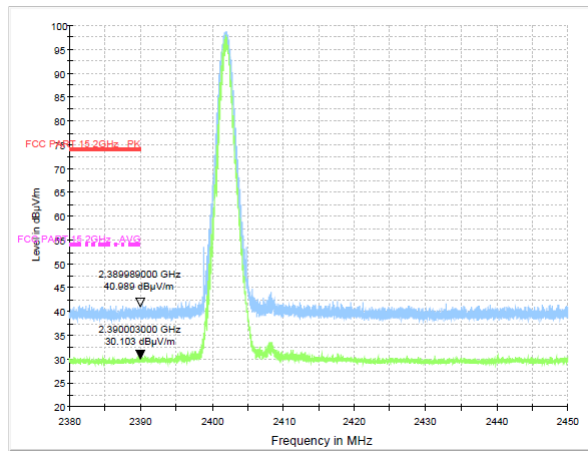
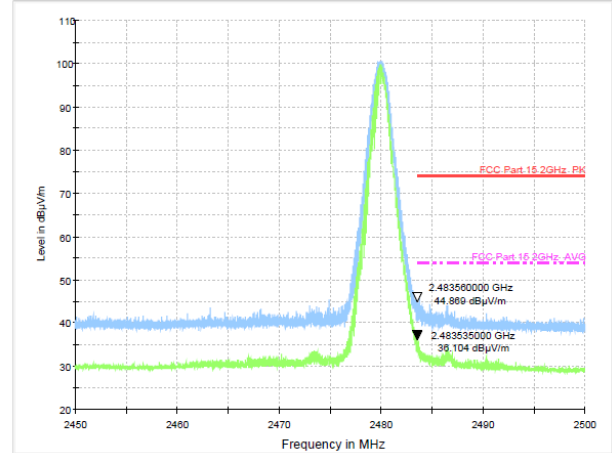
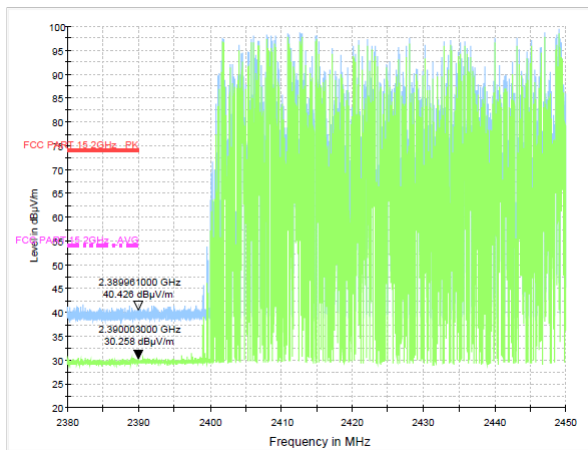
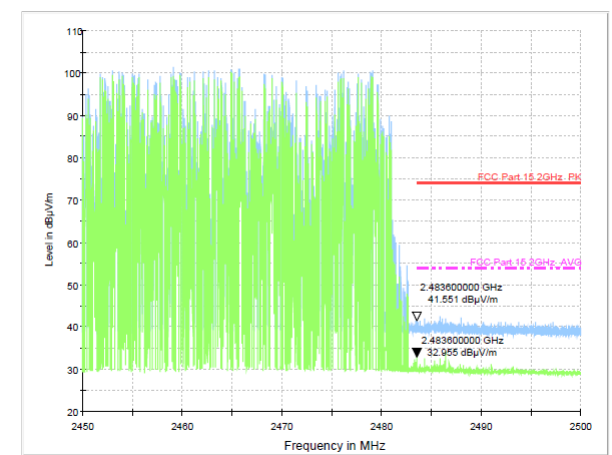


*Test Mode: 8DPSK-Low Hopping-off**Test Mode: 8DPSK-High Hopping-off**Test Mode: 8DPSK-Low Hopping-on**Test Mode: 8DPSK-High Hopping-on*


Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Conducted Method


GFSK Mode:

Test channel:

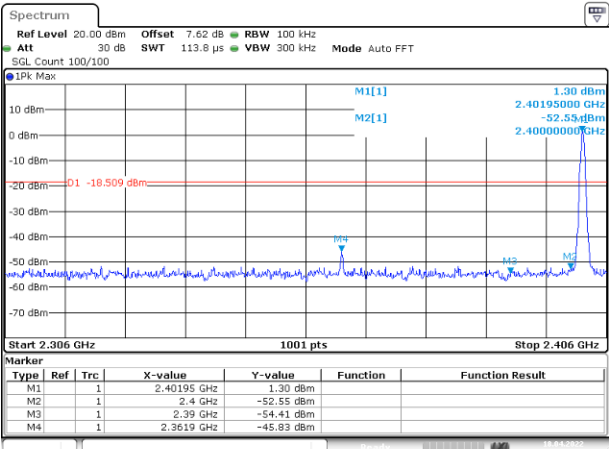


No-hopping mode

Lowest channel

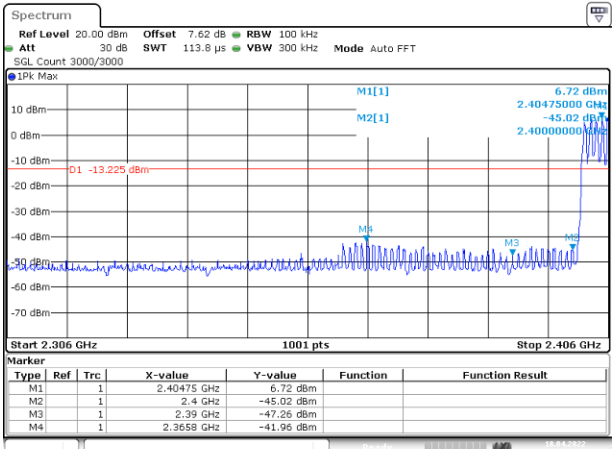


Hopping mode

Test channel:

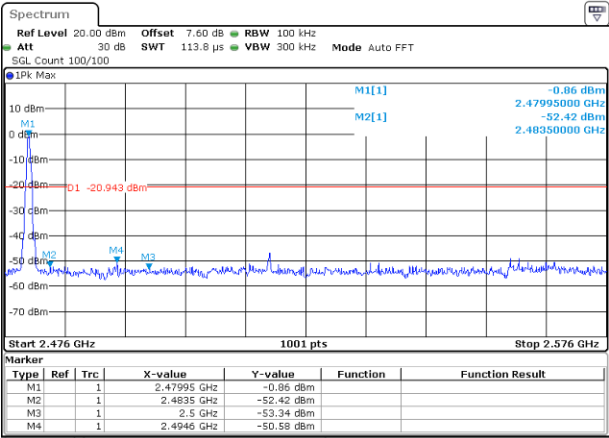

No-hopping mode


Highest channel

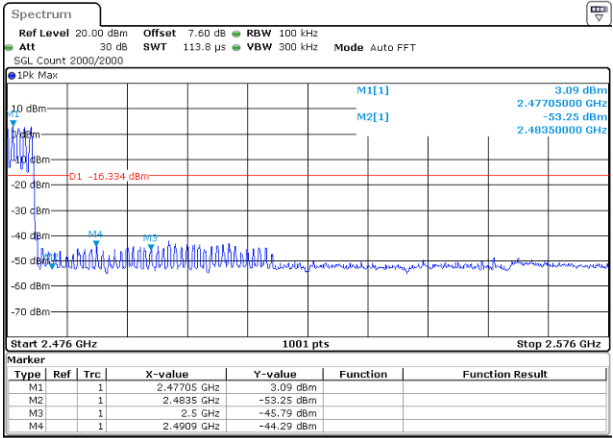

Hopping mode


$\pi/4$ DQPSK Mode:

Test channel:

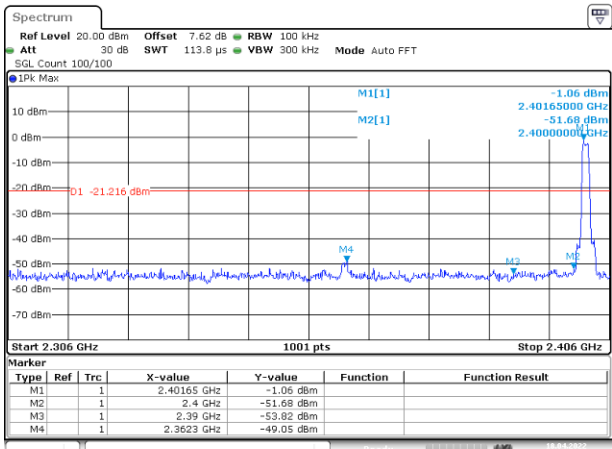


No-hopping mode

Lowest channel

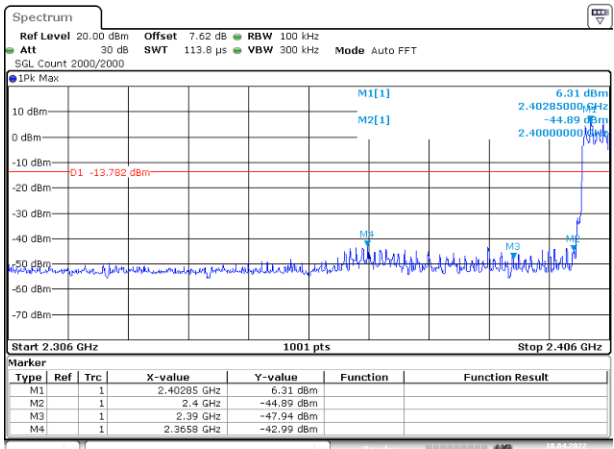


Hopping mode

Test channel:

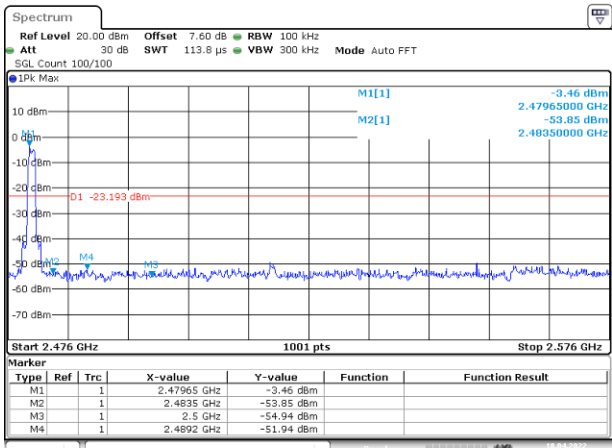

No-hopping mode

Highest channel

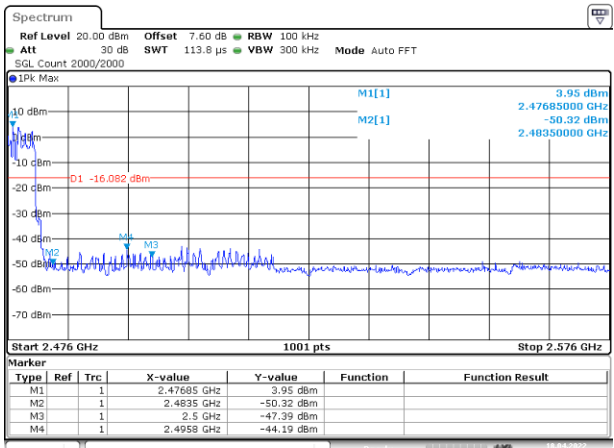


Hopping mode


8DPSK Mode:

Test channel:

Lowest channel

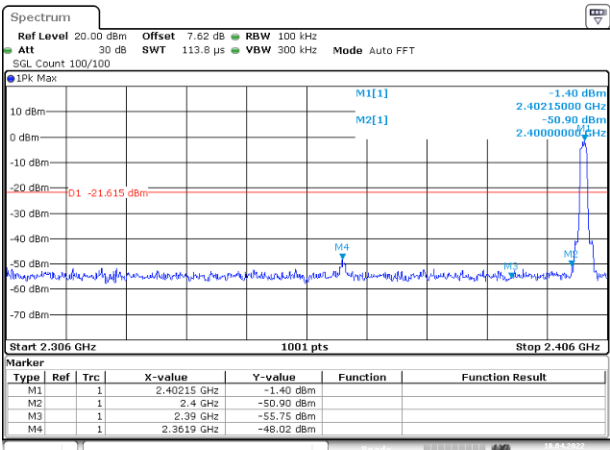


No-hopping mode

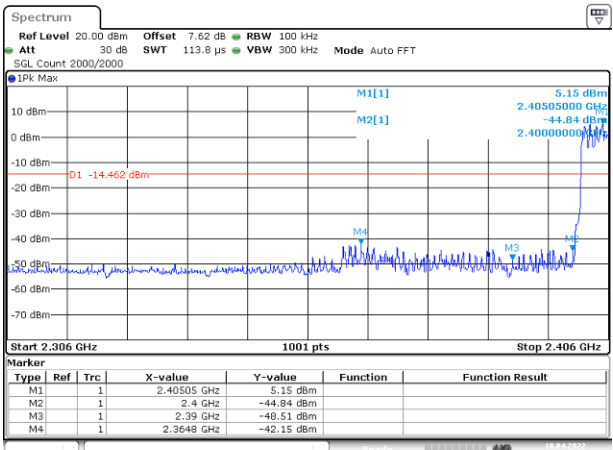


Hopping mode

Test channel:

Highest channel

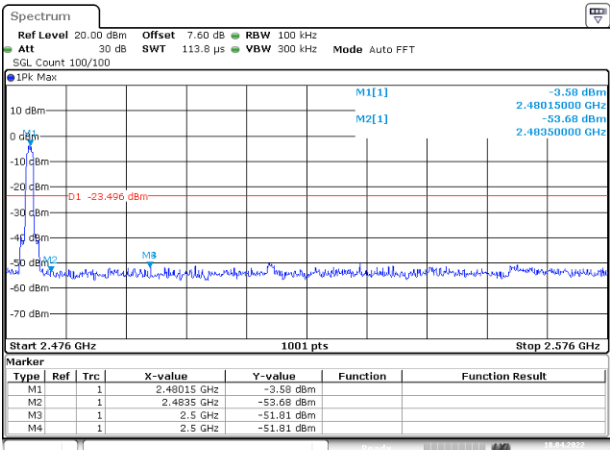


No-hopping mode

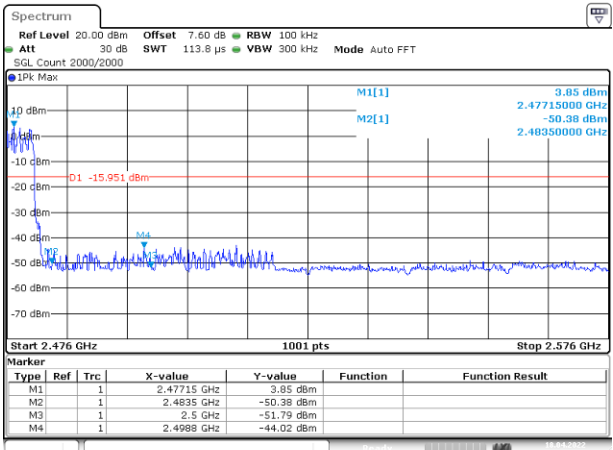

Hopping mode

## 10. POWER LINE CONDUCTED EMISSIONS

### 10.1. Block Diagram of Test Setup

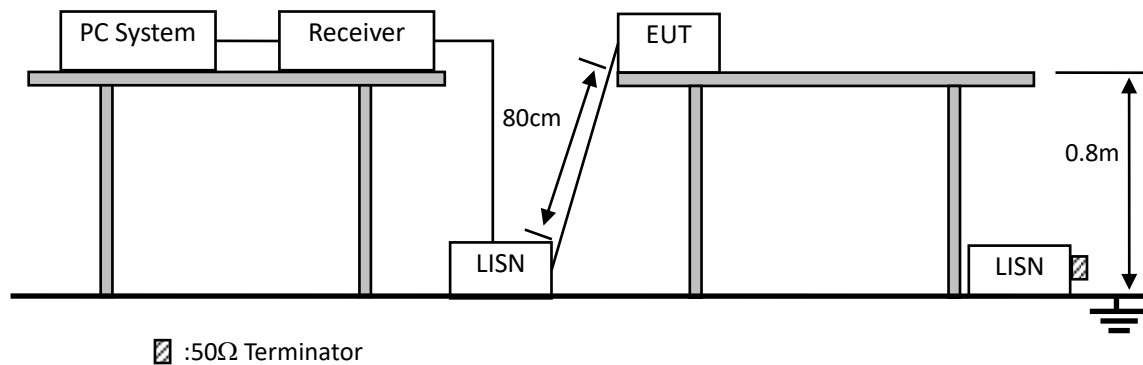

### 10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

### 10.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013 on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

### 10.4. Test Result

PASS. (See below detailed test data)

Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Line:

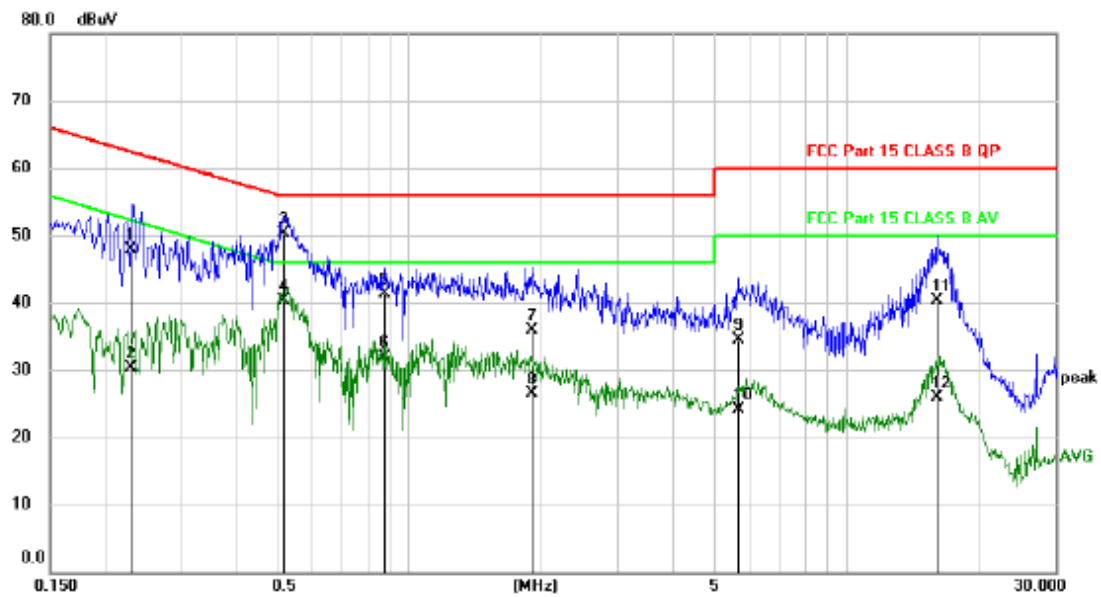


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2310	37.94	9.95	47.89	62.41	-14.52	QP	
2		0.2310	20.31	9.95	30.26	52.41	-22.15	AVG	
3	*	0.5130	40.33	9.95	50.28	56.00	-5.72	QP	
4		0.5130	30.33	9.95	40.28	46.00	-5.72	AVG	
5		0.8760	31.29	9.96	41.25	56.00	-14.75	QP	
6		0.8760	21.93	9.96	31.89	46.00	-14.11	AVG	
7		1.9020	26.08	9.88	35.96	56.00	-20.04	QP	
8		1.9020	16.64	9.88	26.52	46.00	-19.48	AVG	
9		5.6430	24.51	10.07	34.58	60.00	-25.42	QP	
10		5.6430	13.94	10.07	24.01	50.00	-25.99	AVG	
11		16.0980	29.89	10.36	40.25	60.00	-19.75	QP	
12		16.0980	15.62	10.36	25.98	50.00	-24.02	AVG	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor.    Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

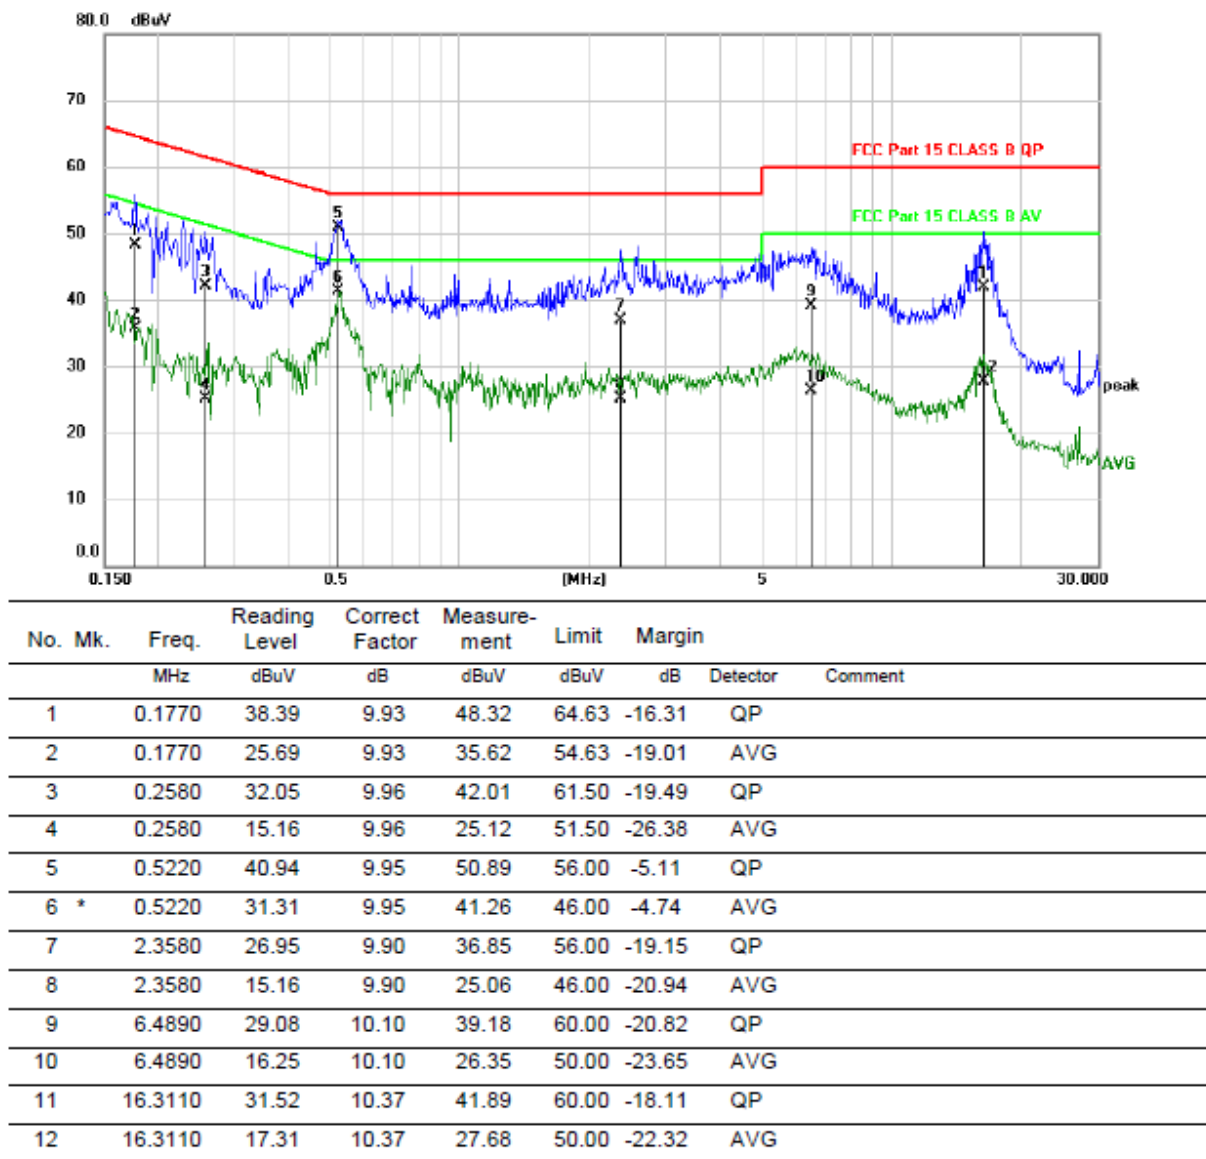**Neutral:**

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor.    Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the Charging mode with the worst data is listed.

## **11.ANTENNA REQUIREMENTS**

### **11.1.Limit**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.



### **11.2.Result**

The EUT antenna is Internal Antenna. It complies with the standard requirement.



## 12. TEST SETUP PHOTO


### 12.1. Photos of Radiated Emission test

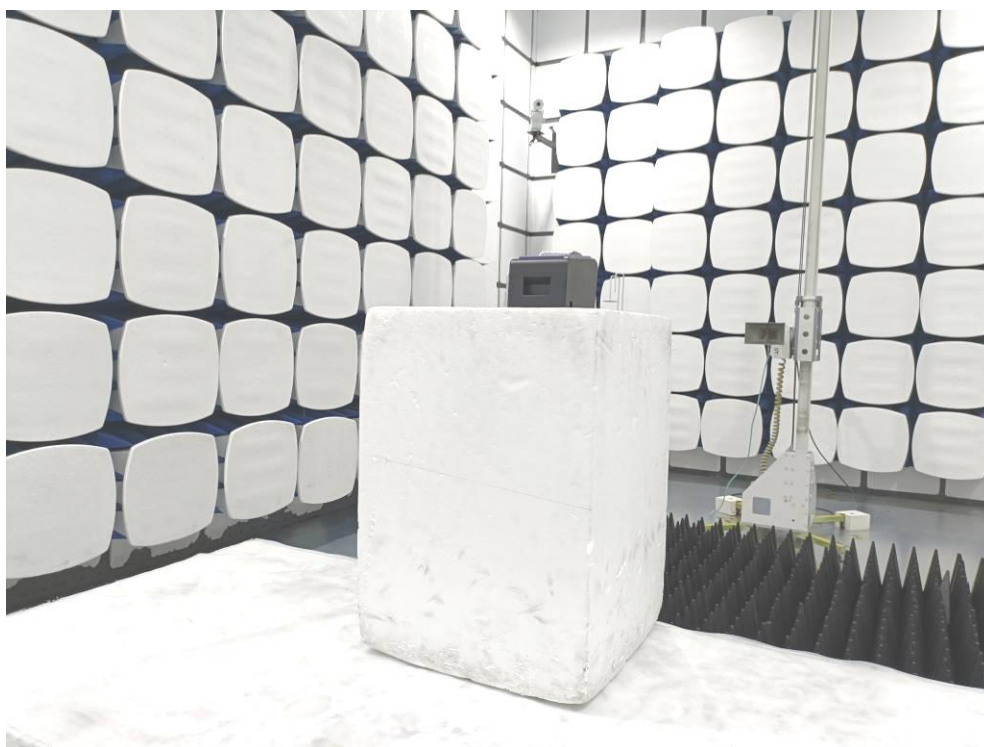
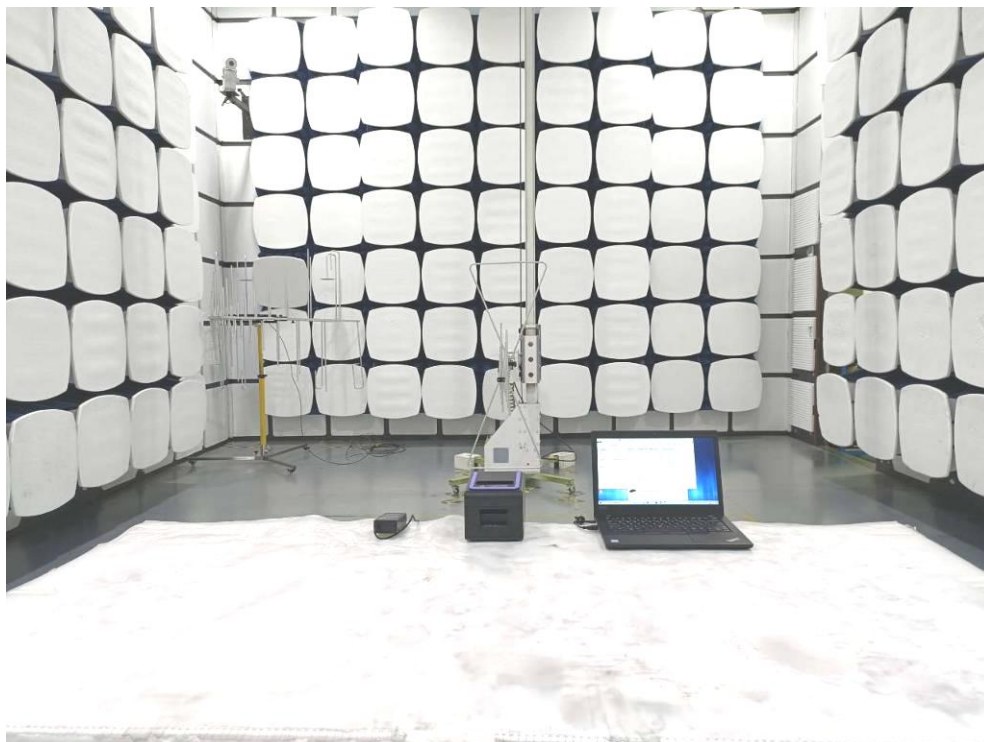


## 12.2.Photos of Conducted Emission test







### 13. PHOTOS OF THE EUT

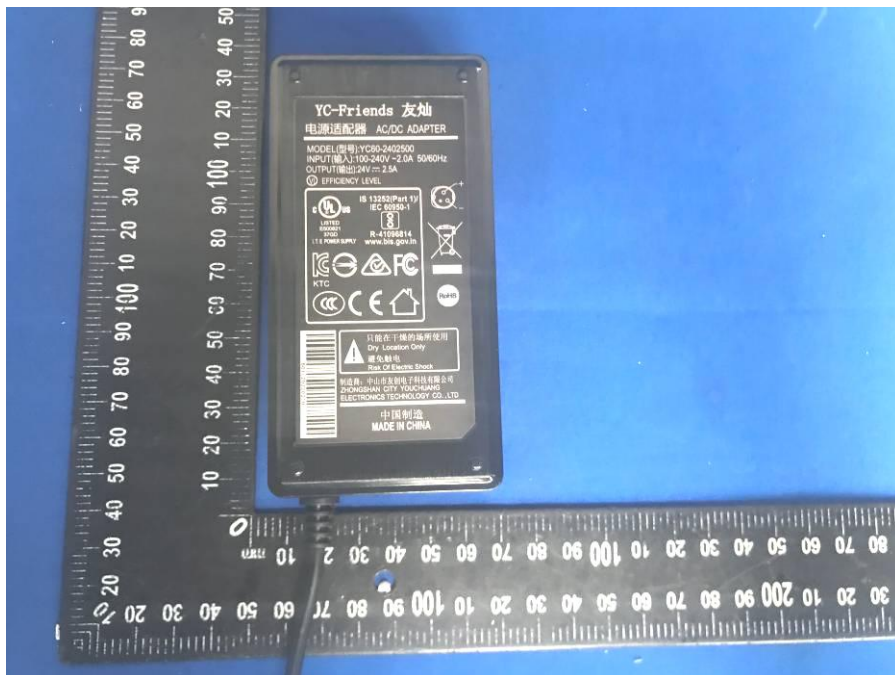


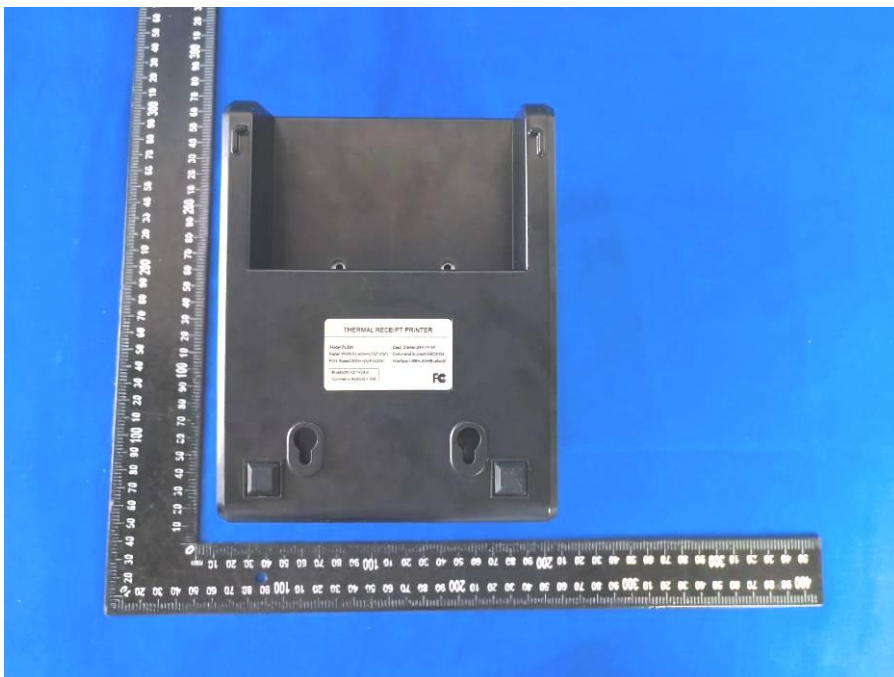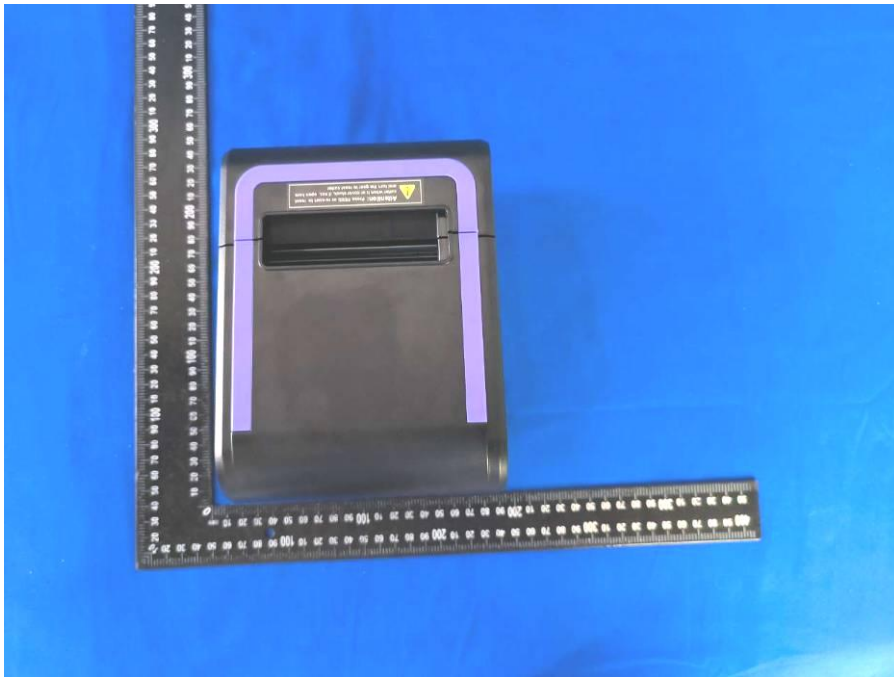




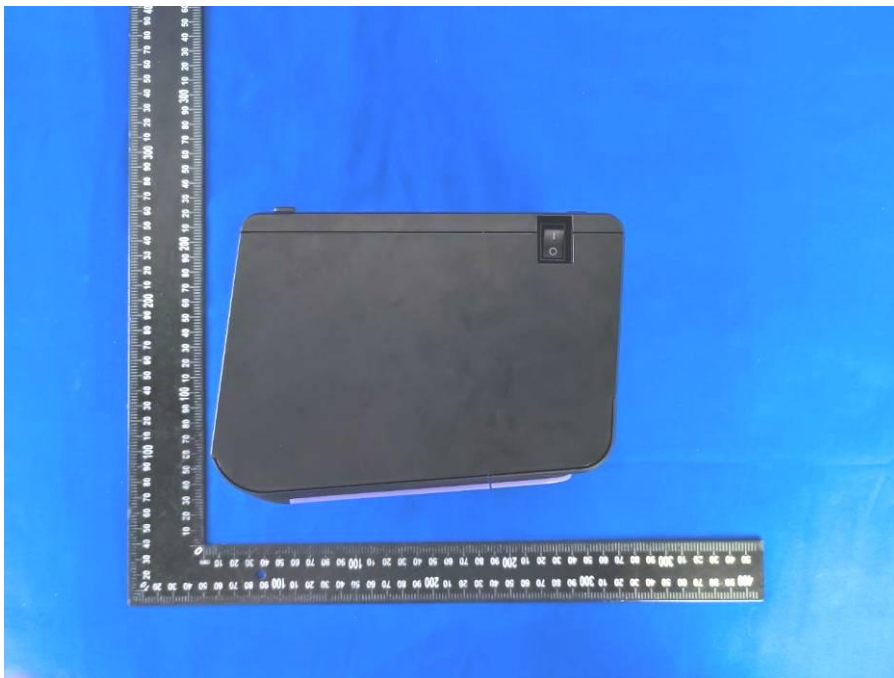
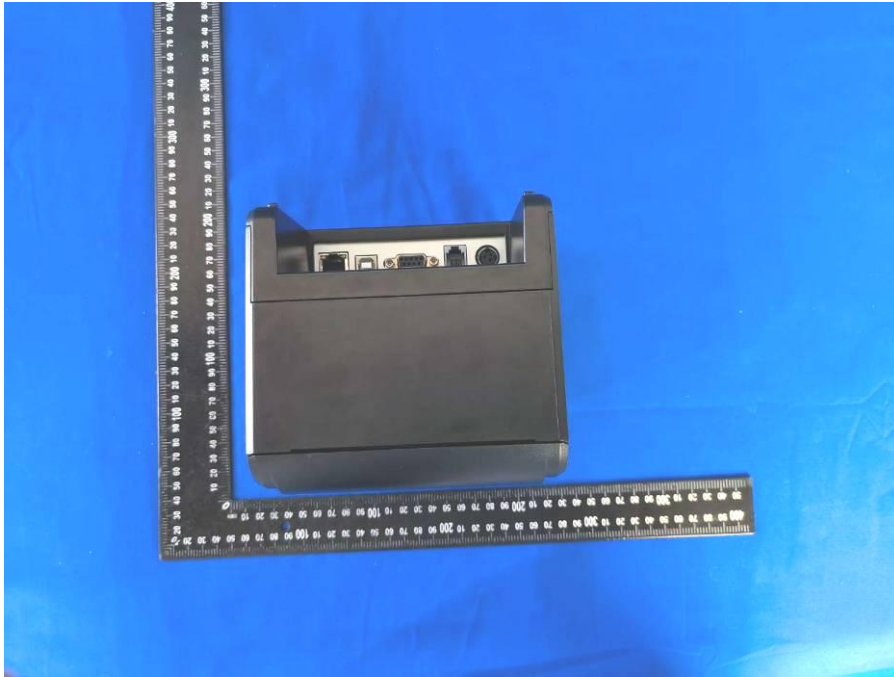


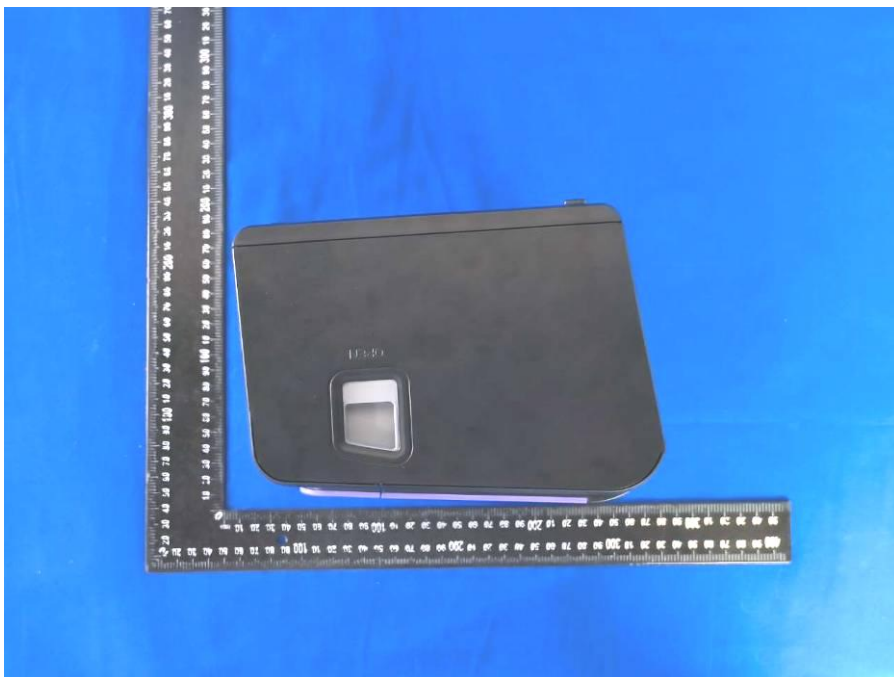
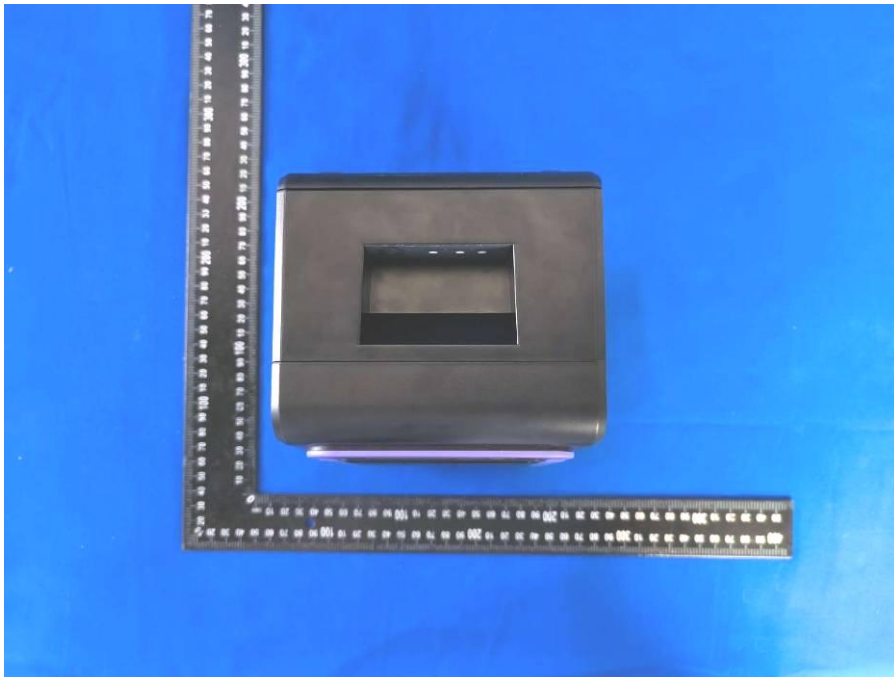


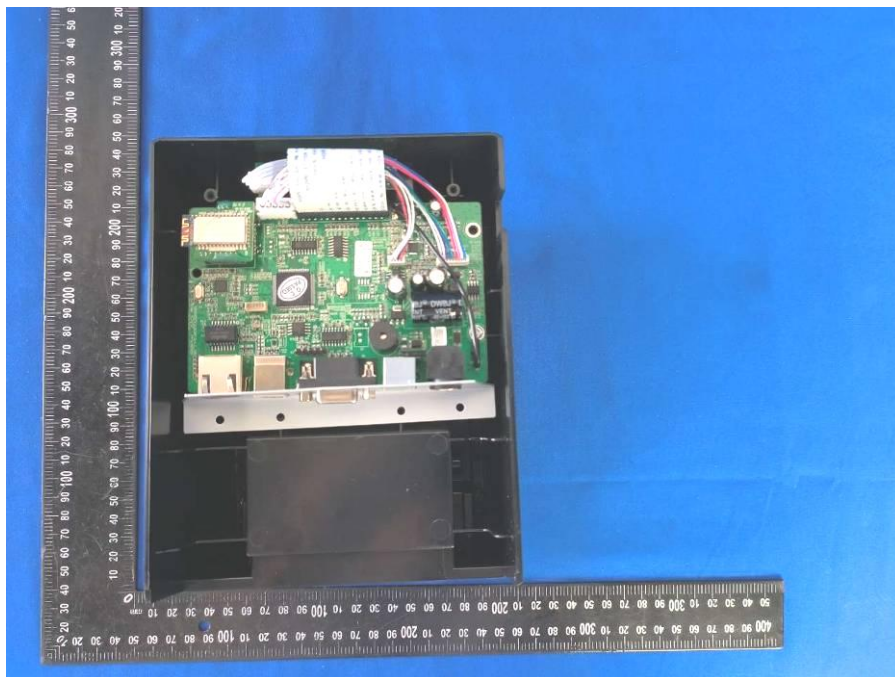


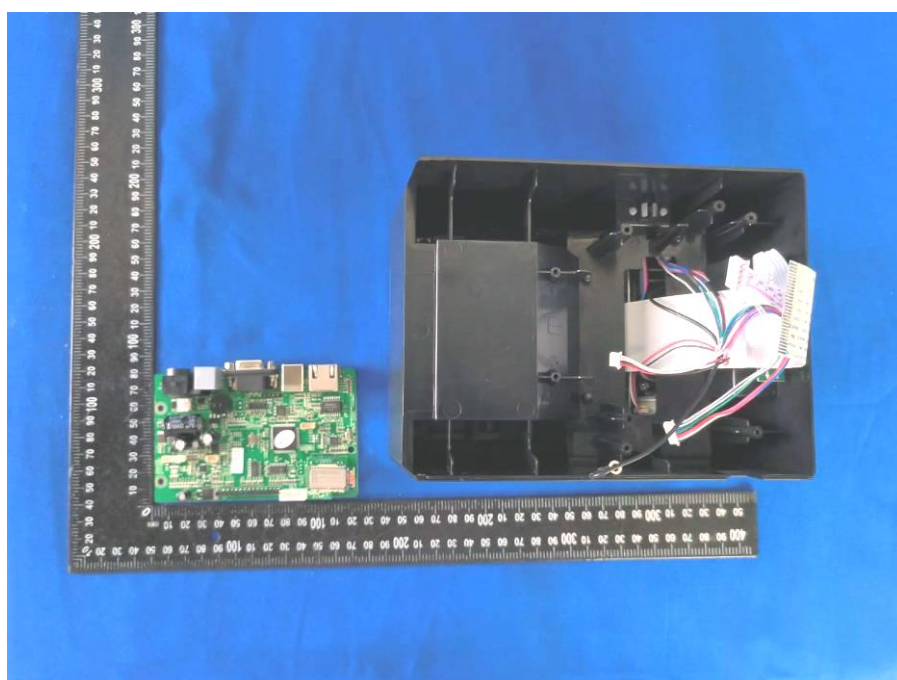






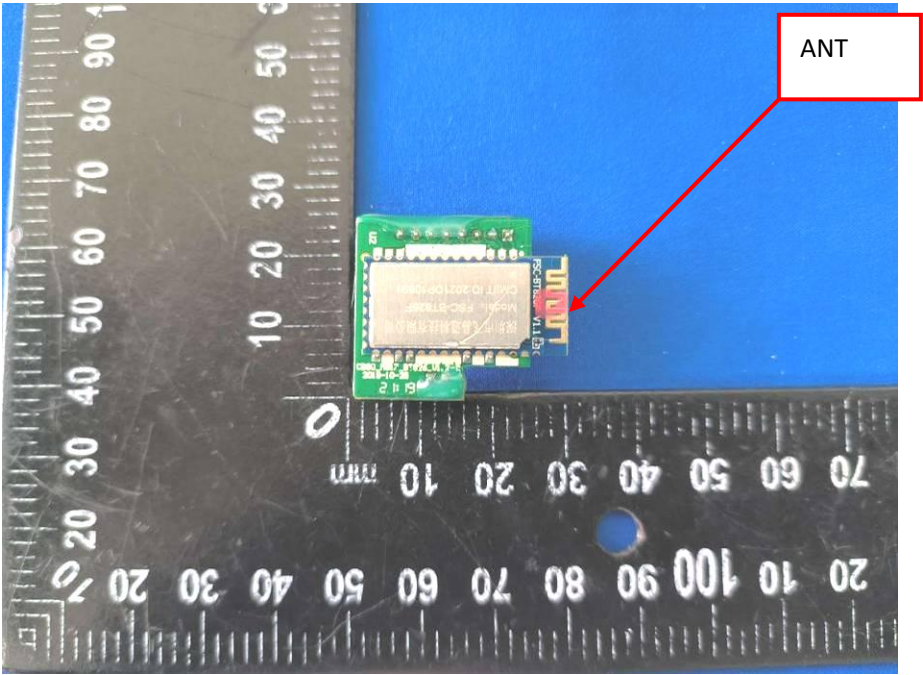
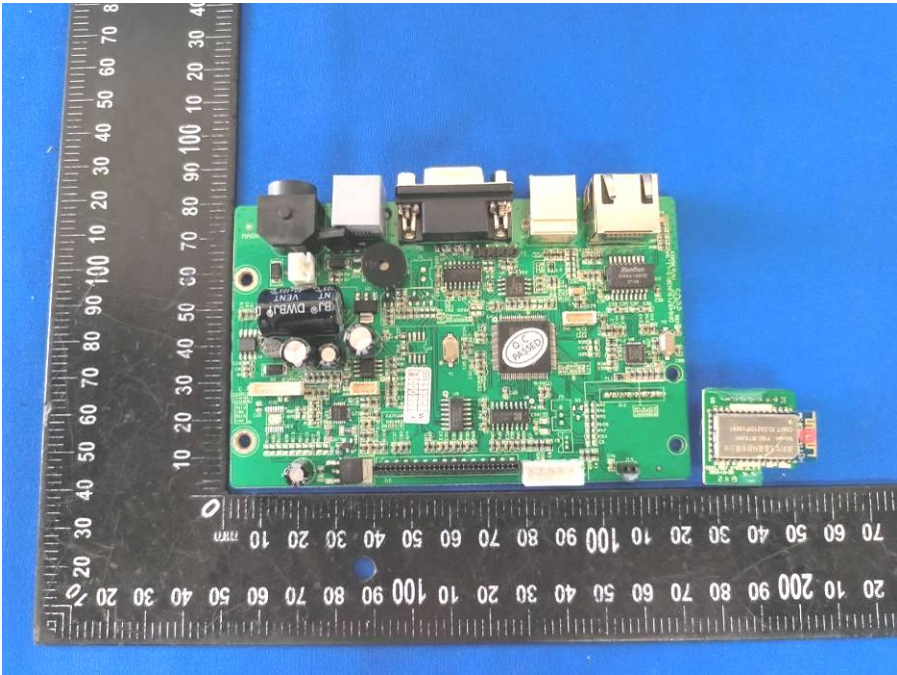


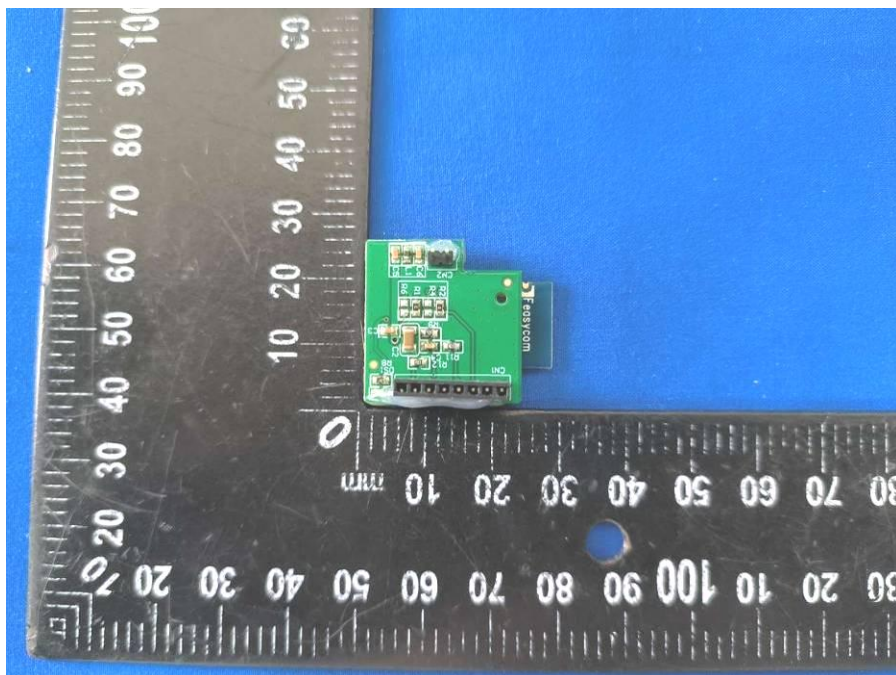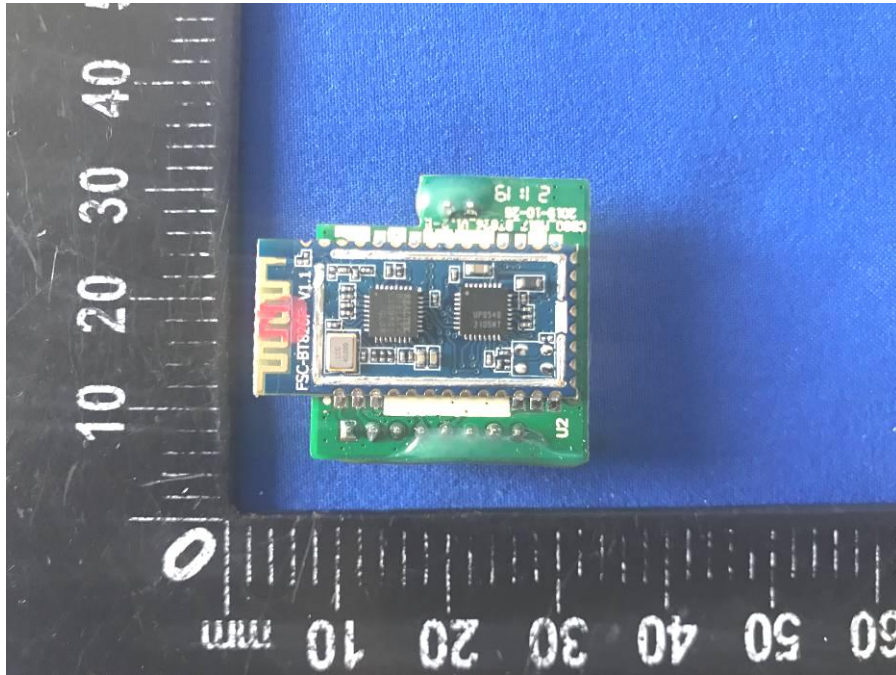





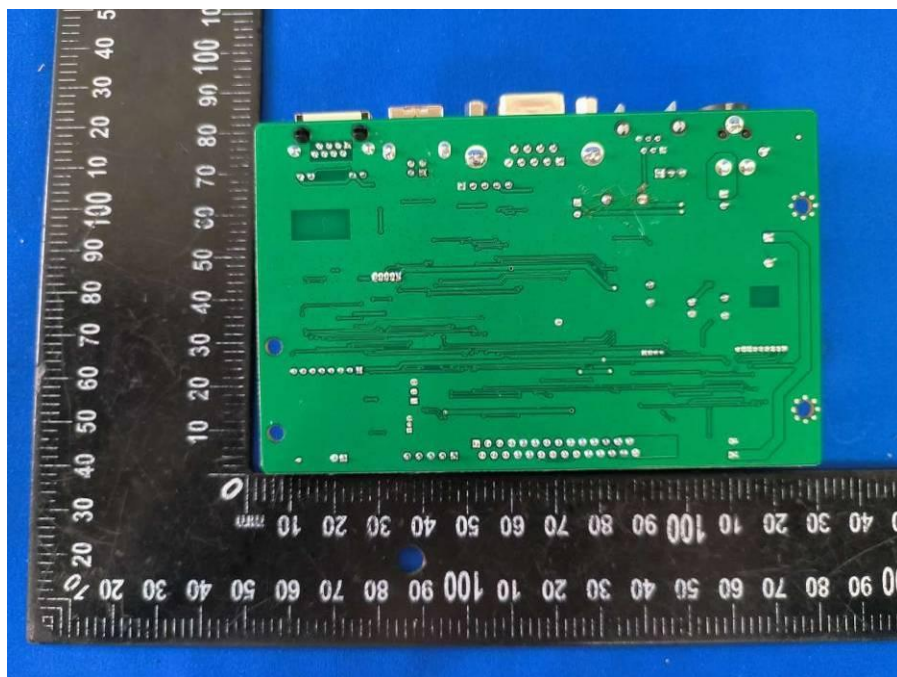
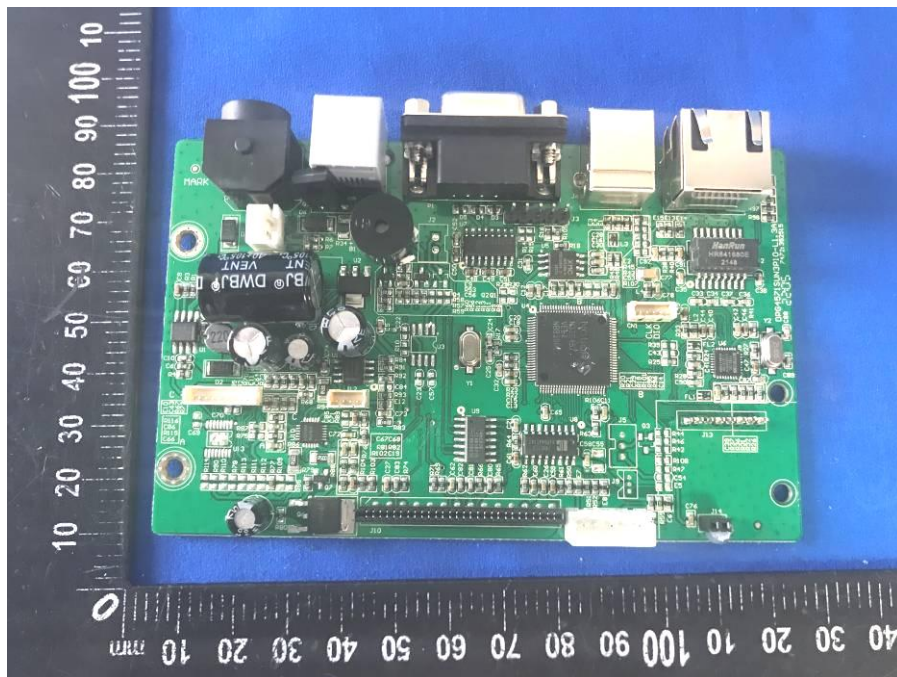


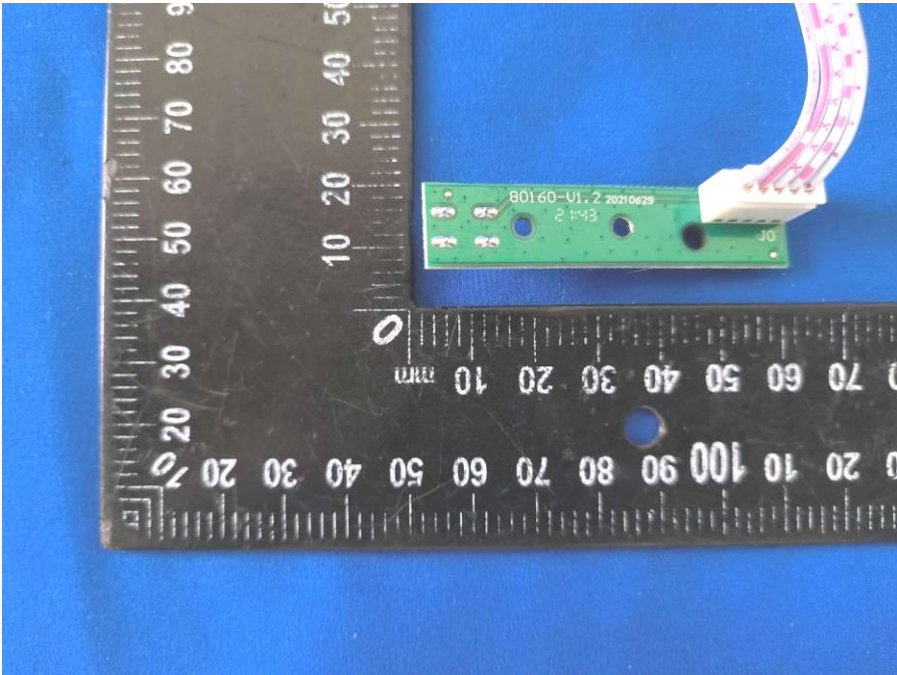
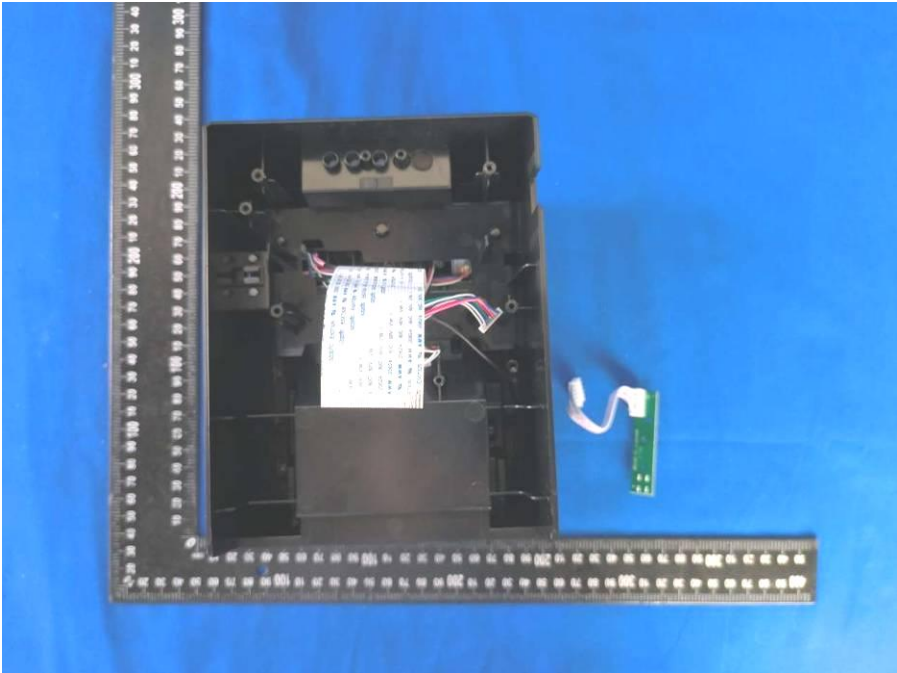


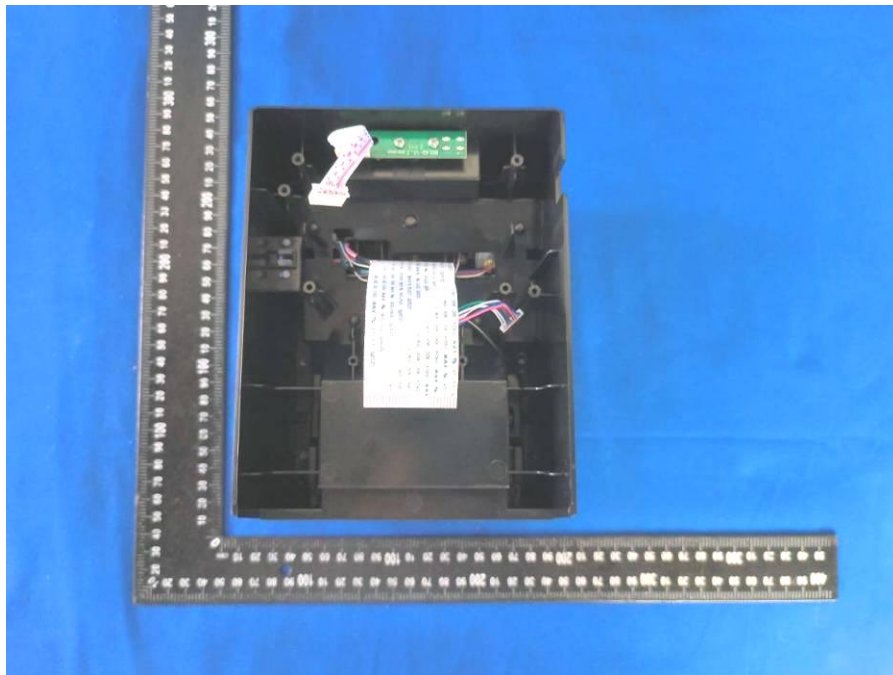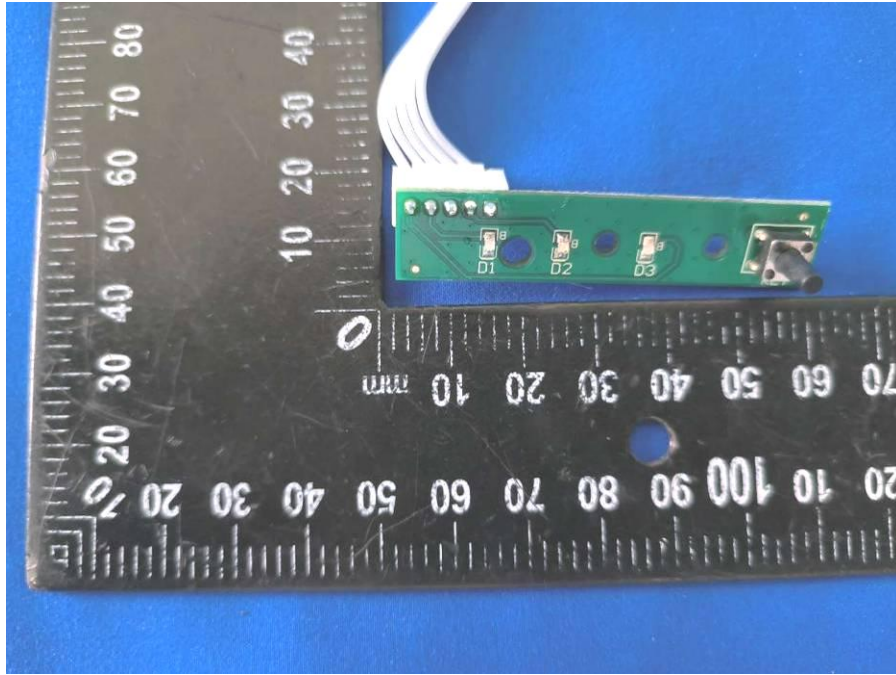





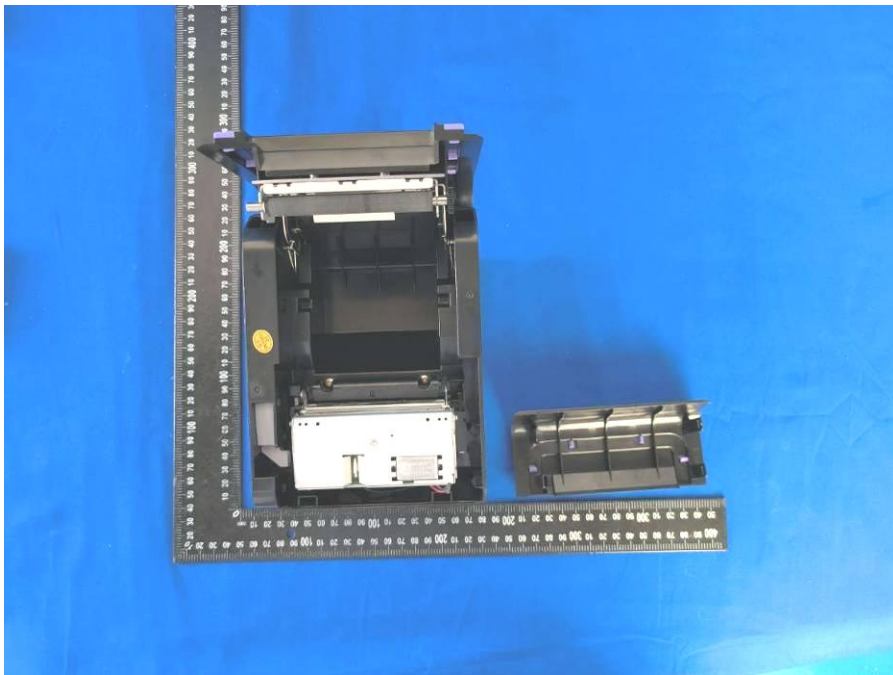
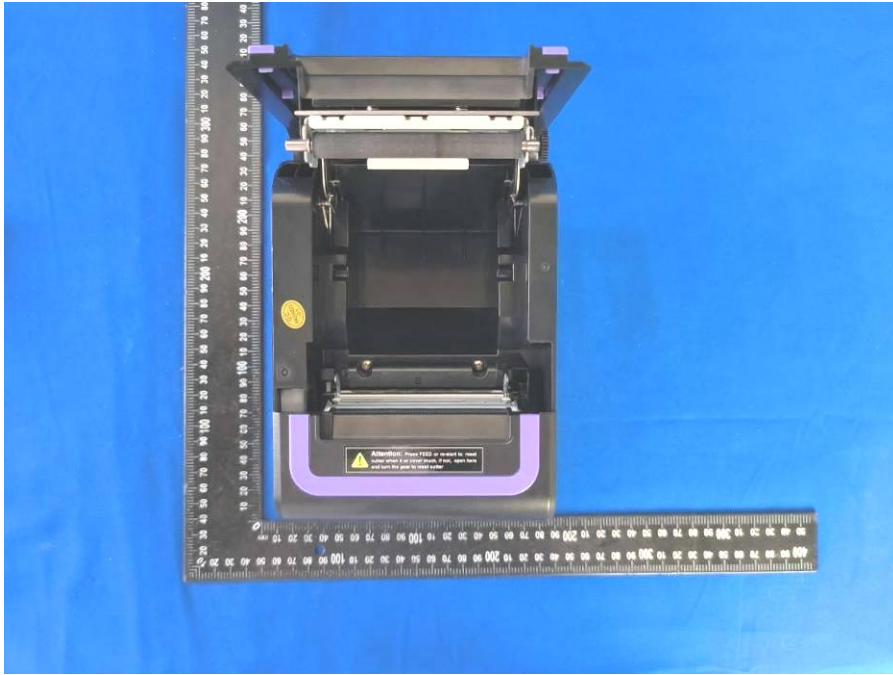


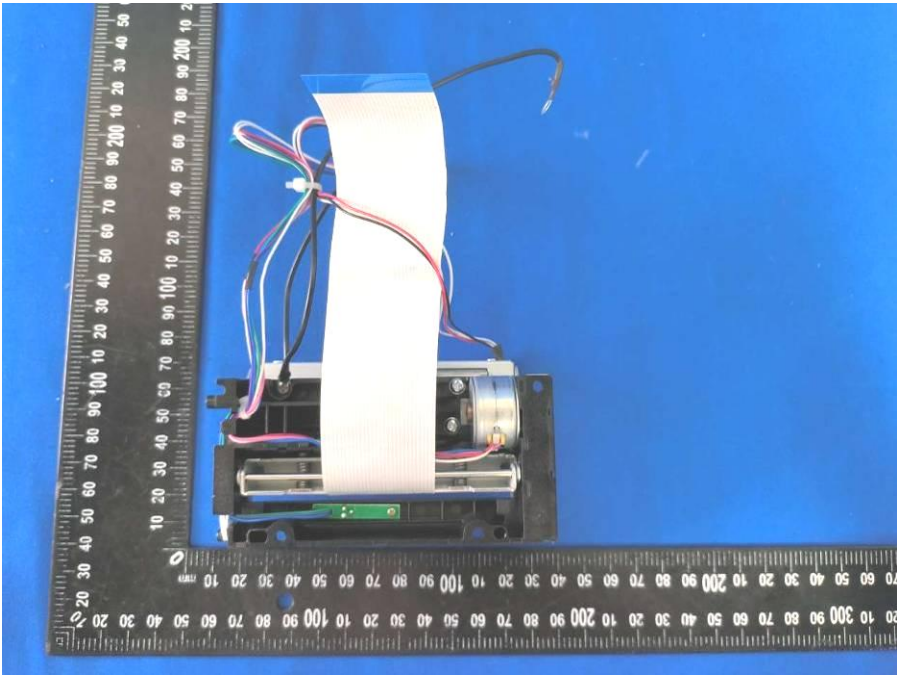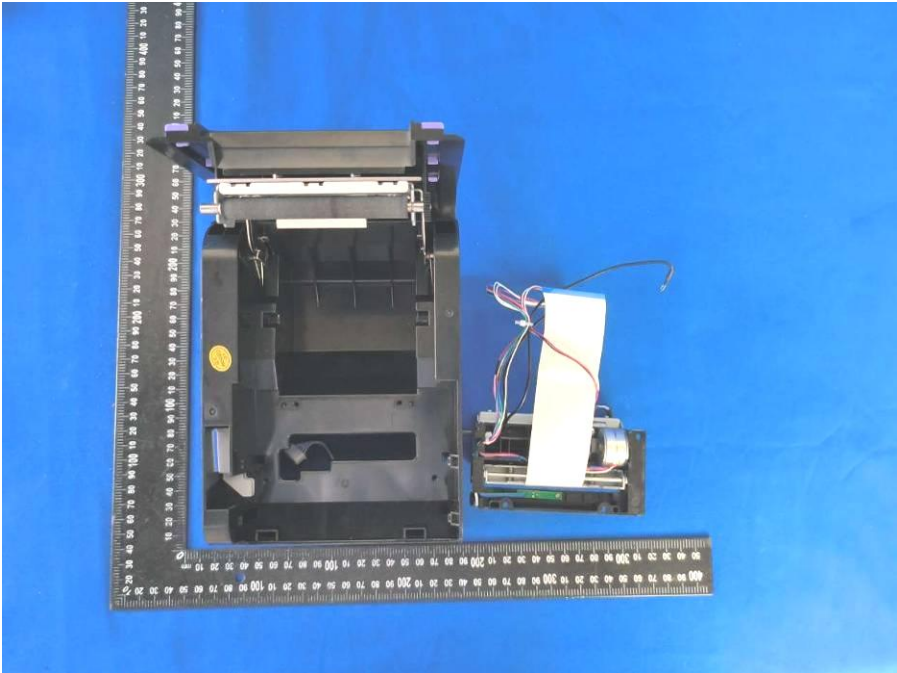


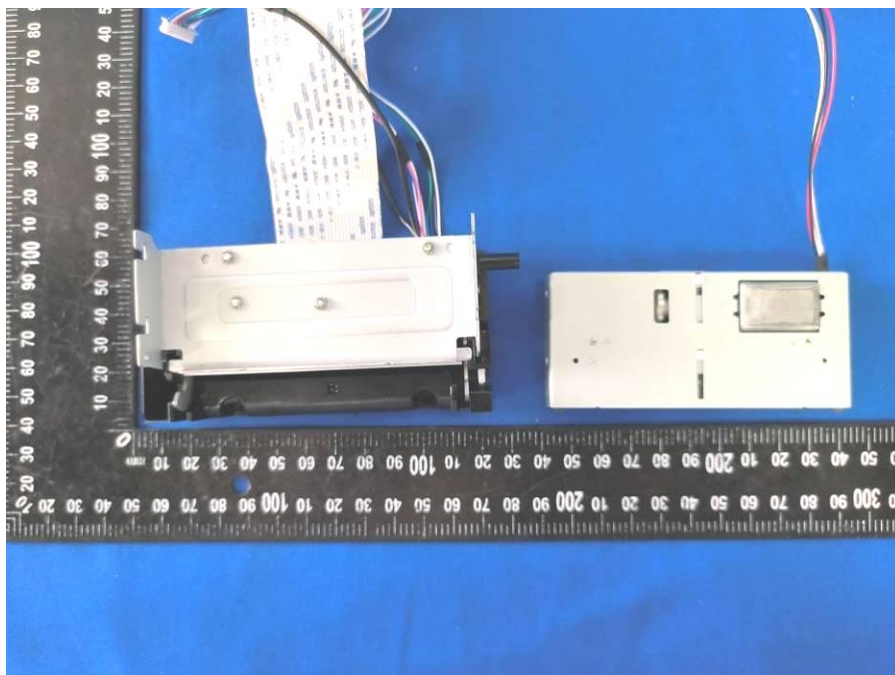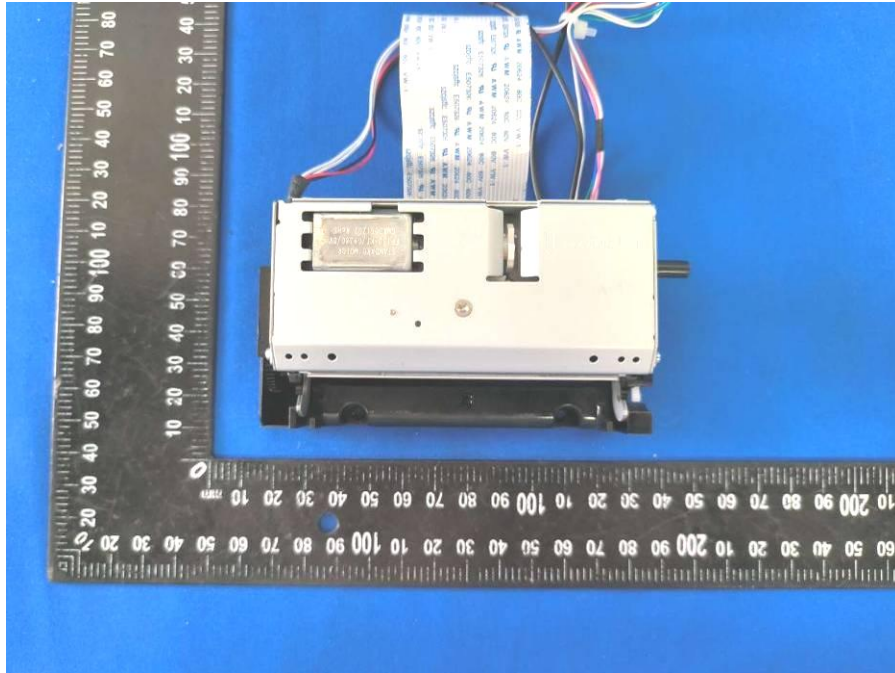



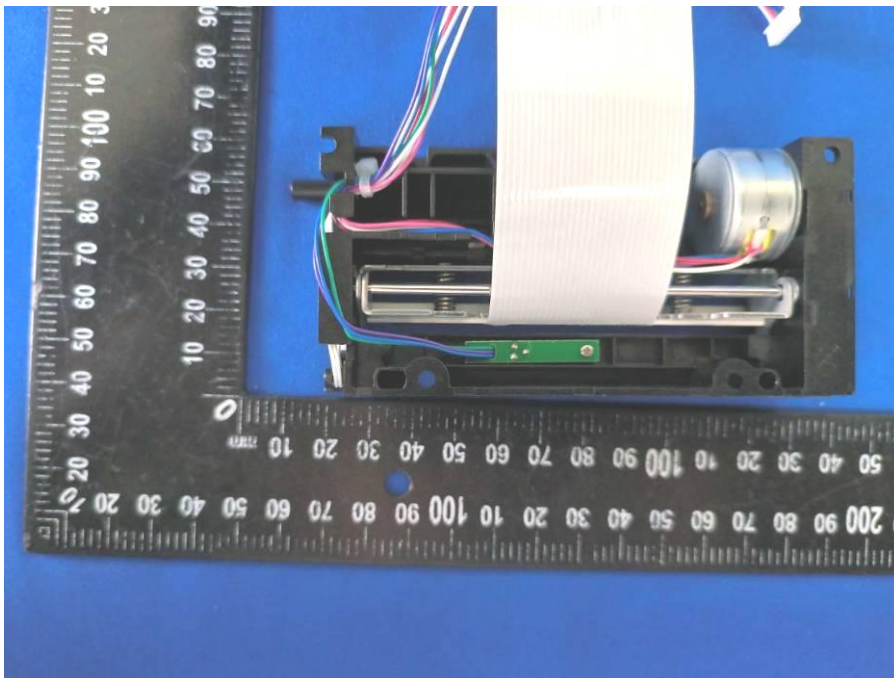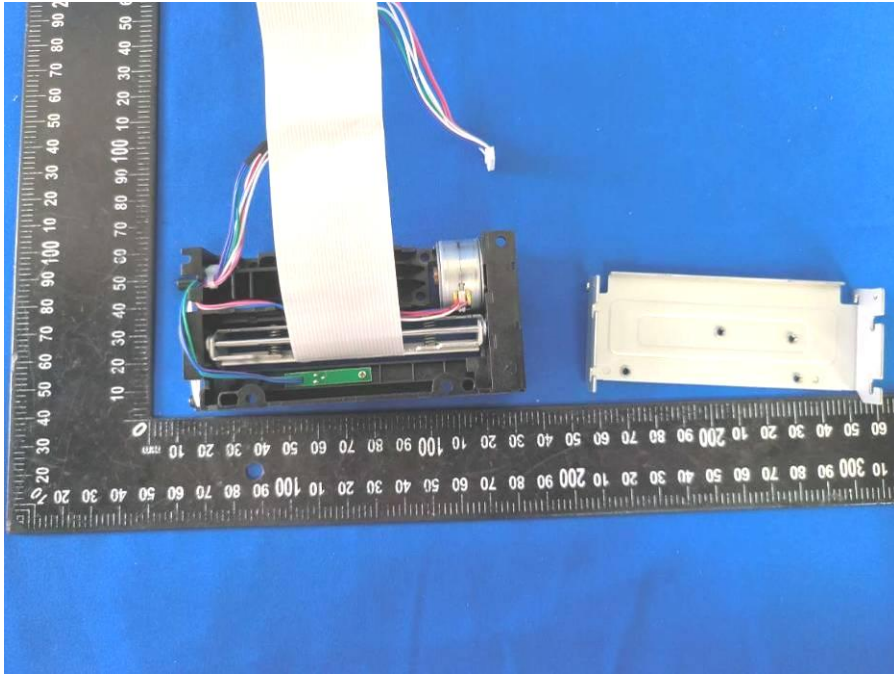

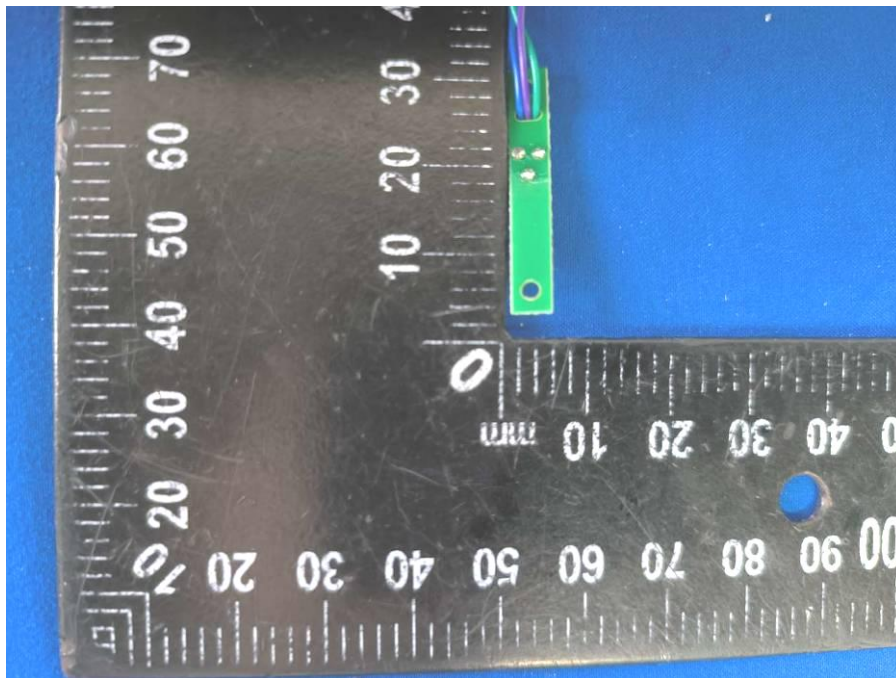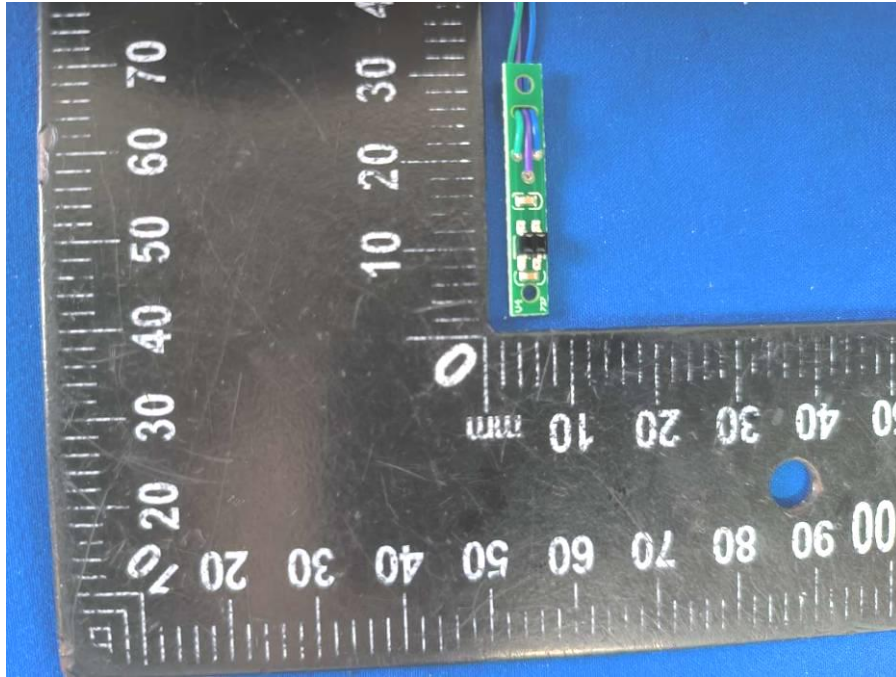

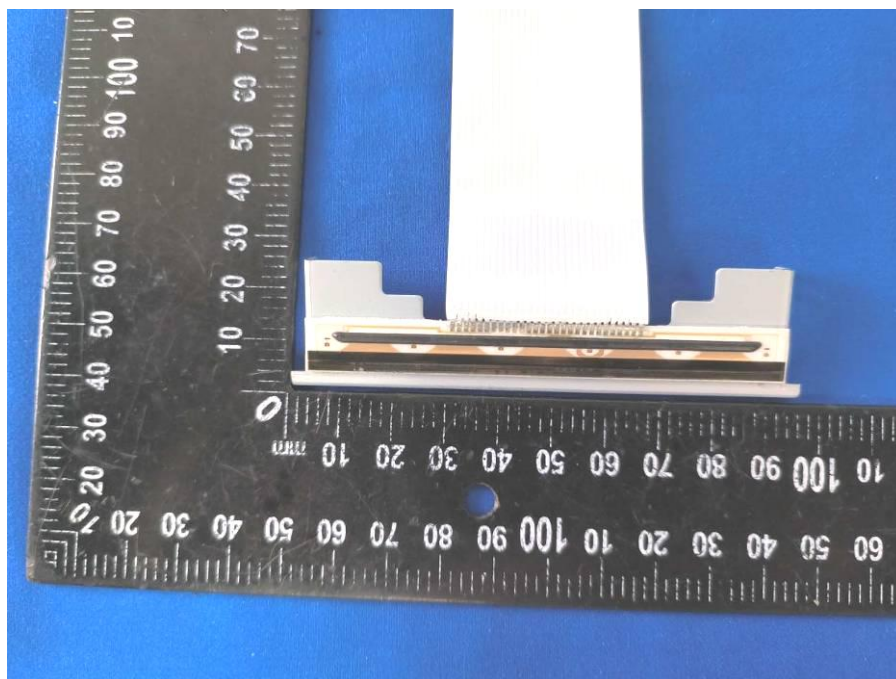

-----THE END OF REPORT-----