


Appendix B

RF power output conducted

FCC part 15.247**Peak output power conducted**

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	

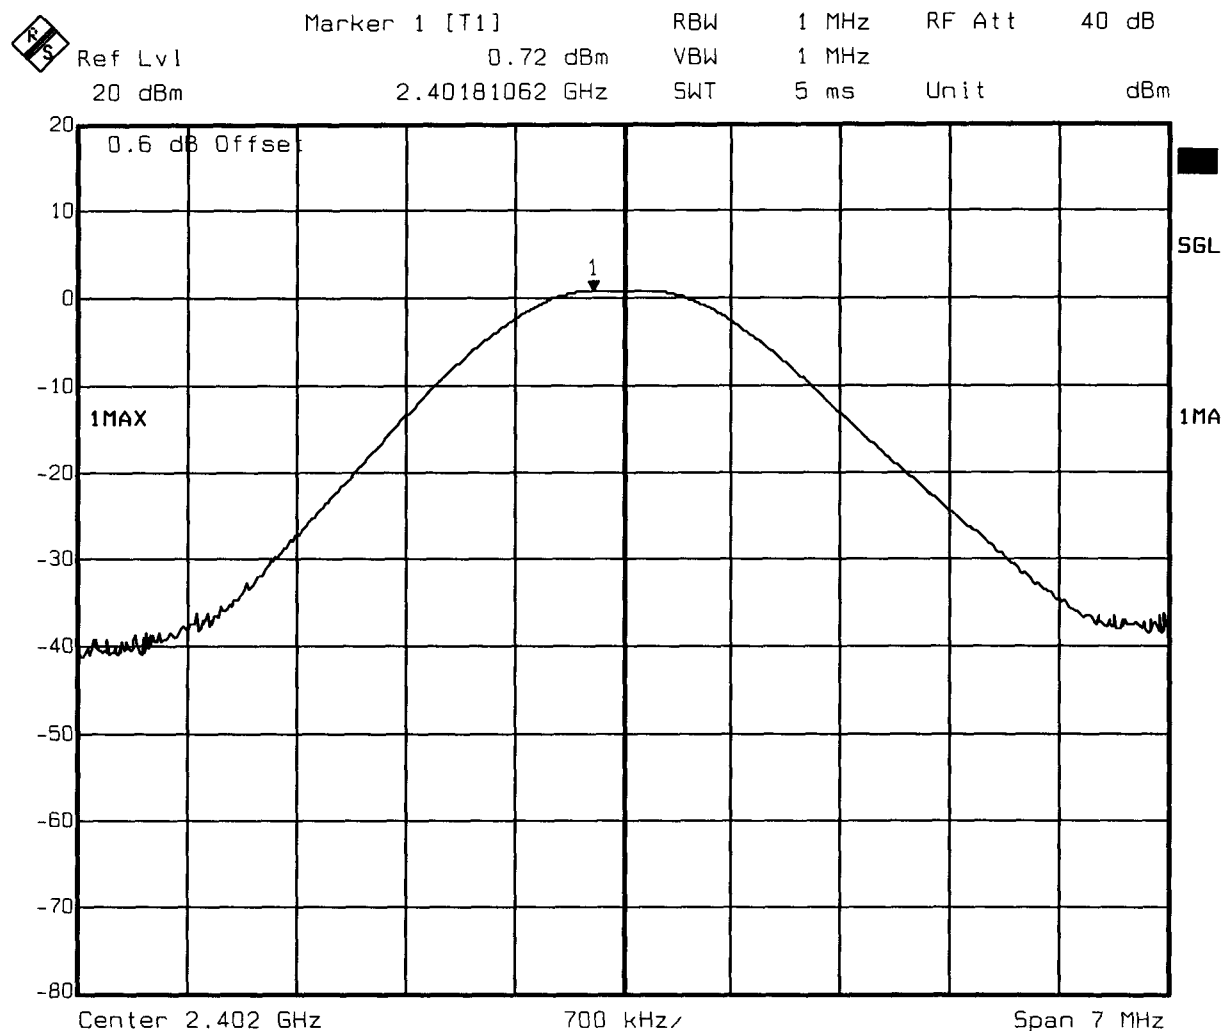


Date: 26.APR.2006 12:39:31

Measurement diagram

FCC part 15.247

Peak output power conducted

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

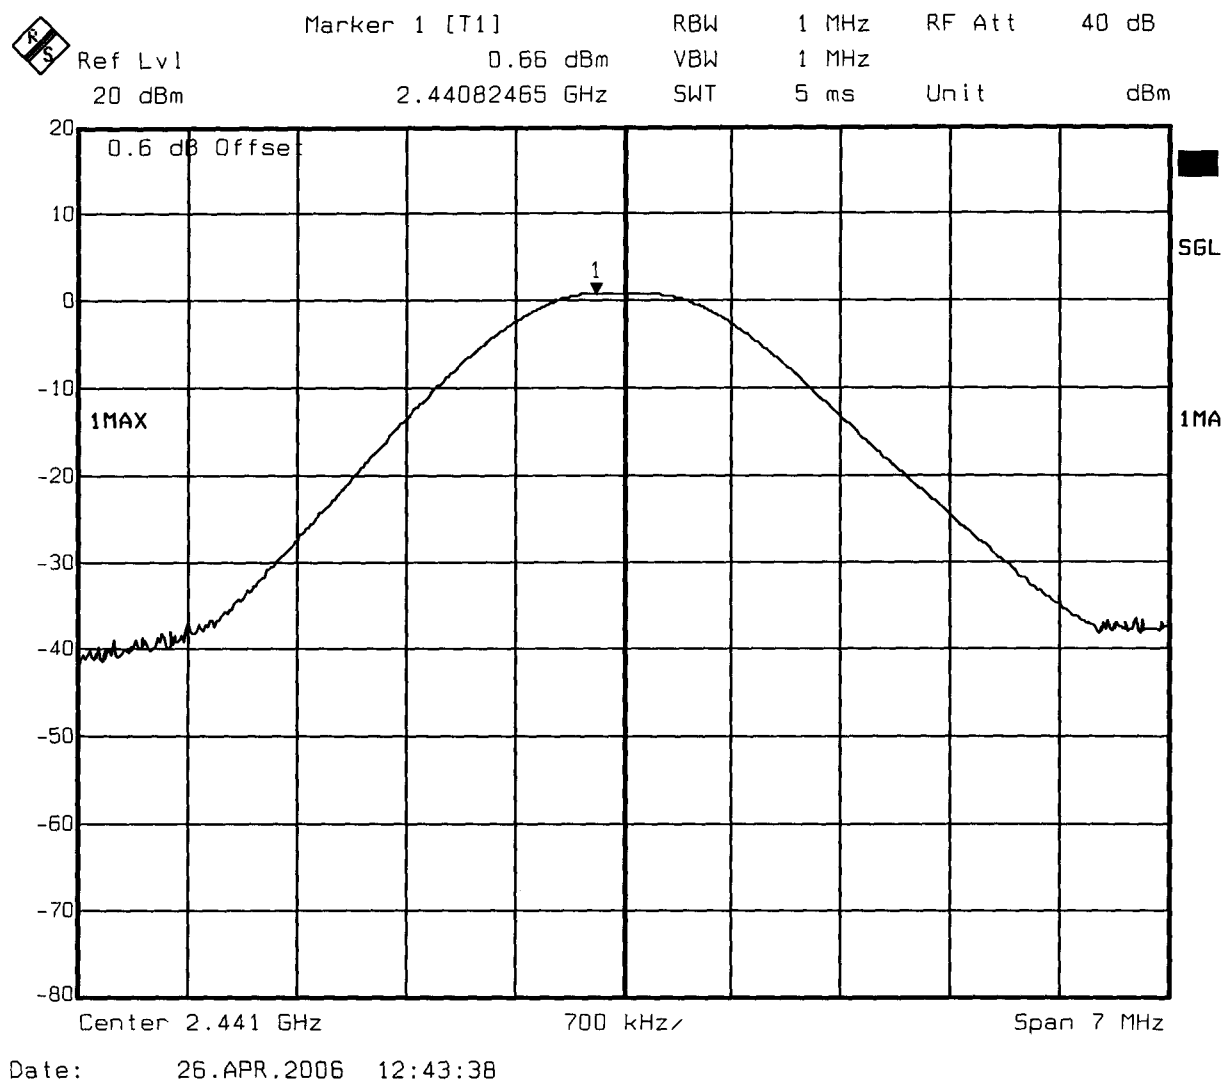


Measurement diagram

FCC part 15.247

Peak output power conducted

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	

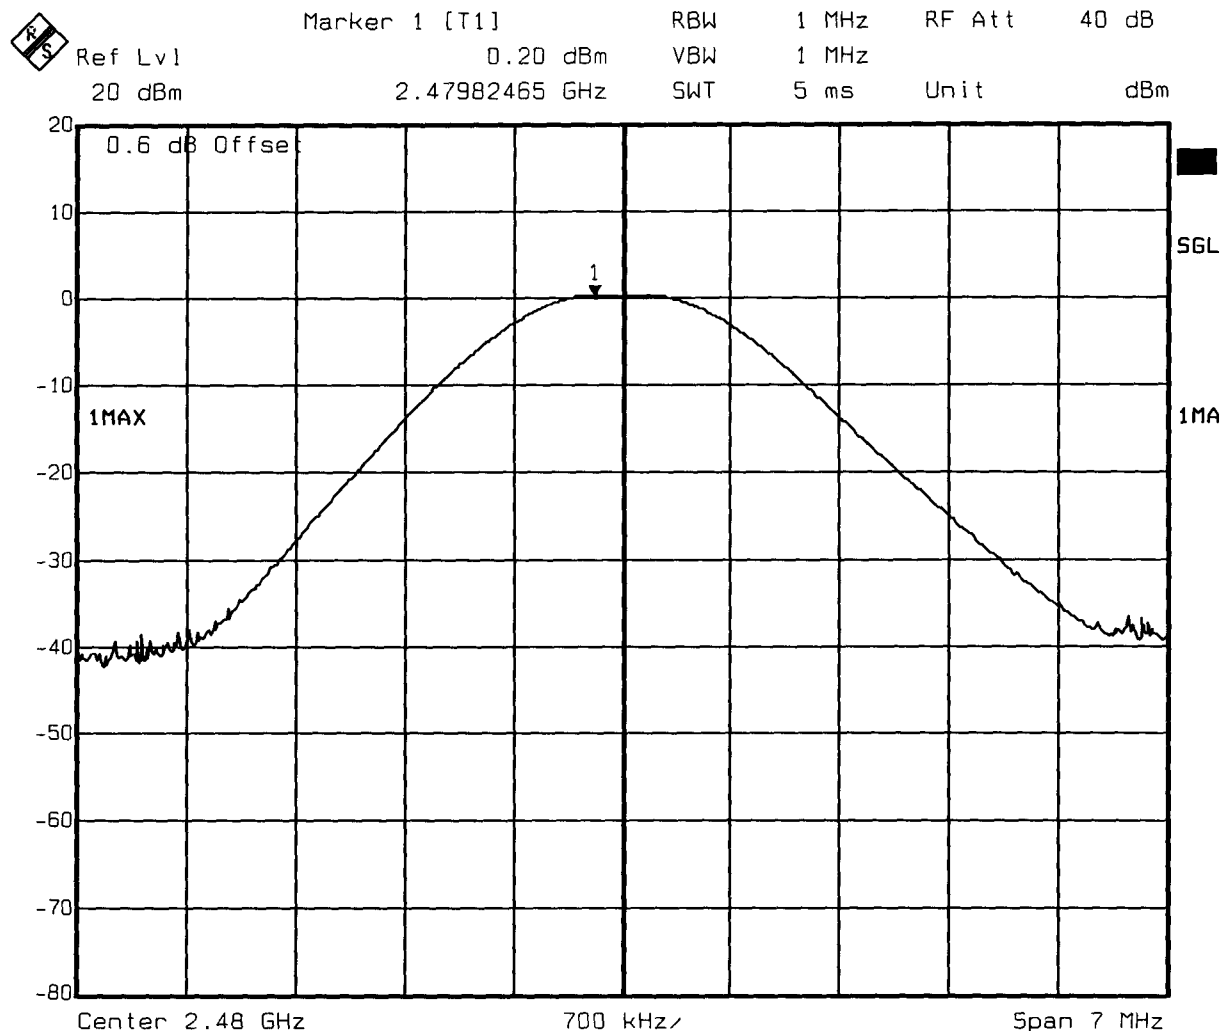


Date: 26.APR.2006 12:46:36

Measurement diagram

FCC part 15.247

Peak output power conducted

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 85 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	

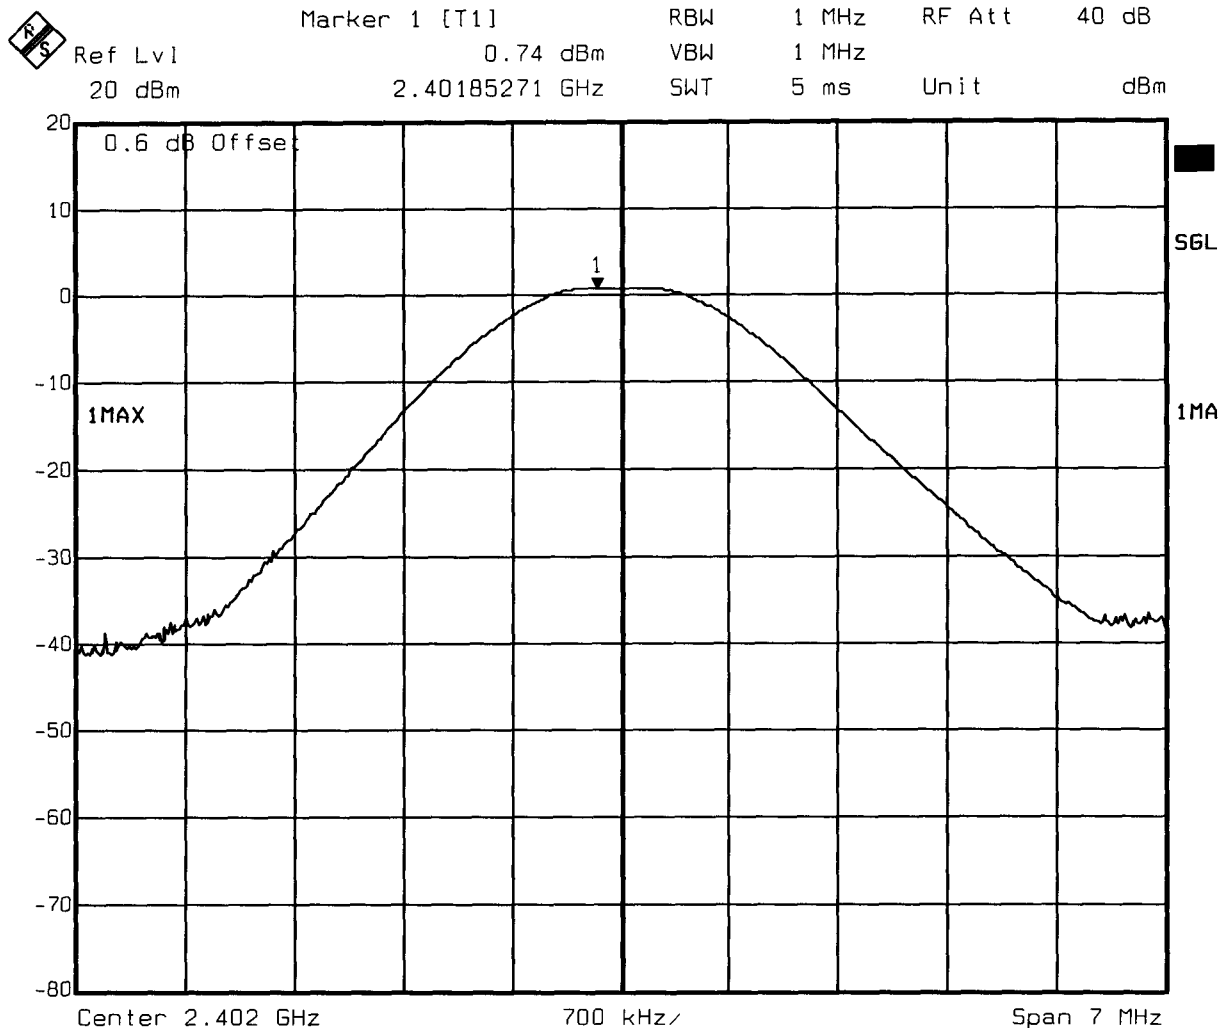


Date: 26.APR.2006 12:57:35

Measurement diagram

FCC part 15.247**Peak output power conducted**

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 85 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

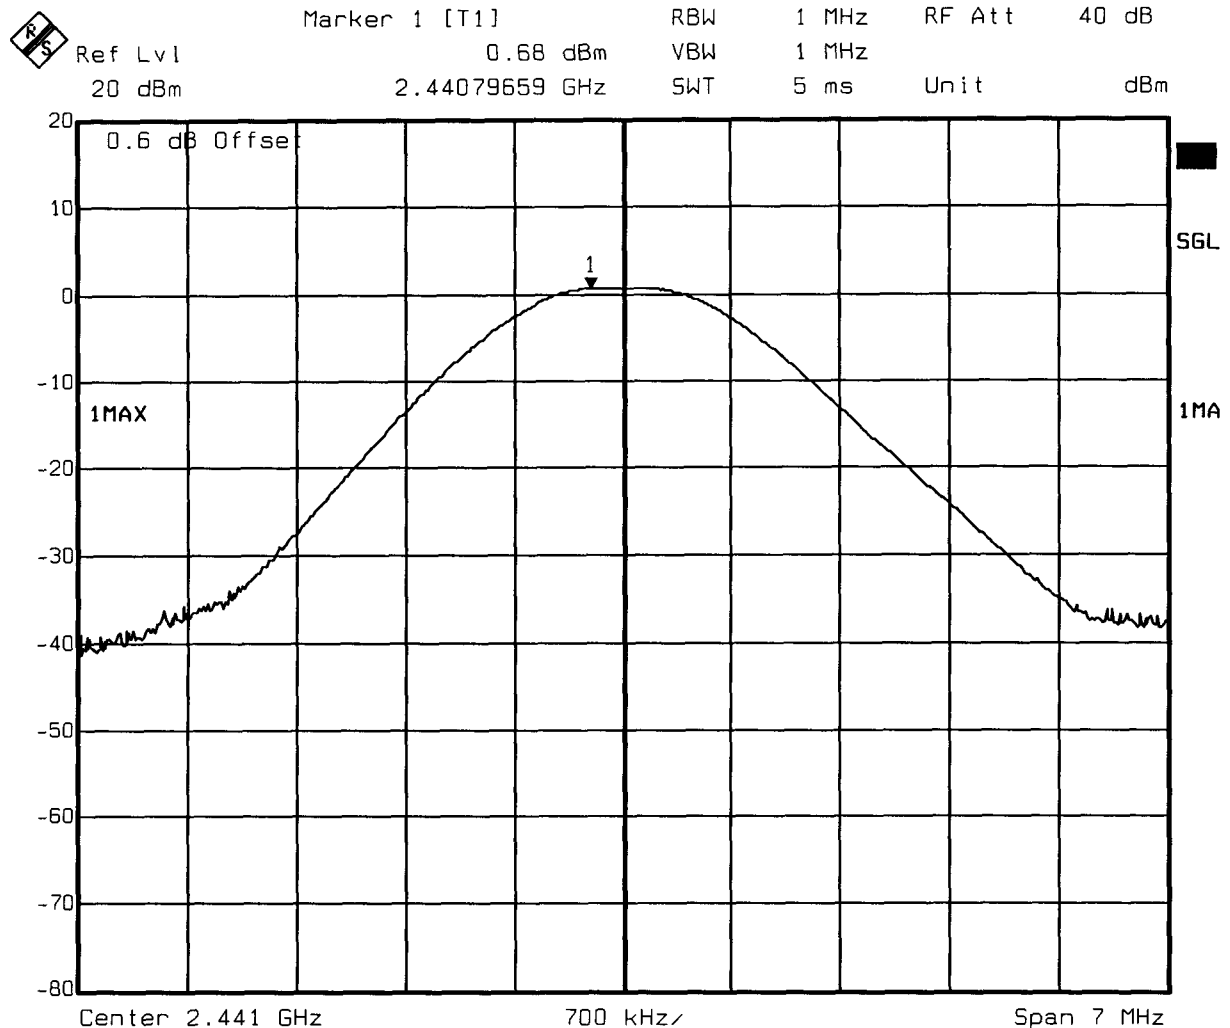


Date: 26.APR.2006 12:55:25

Measurement diagram

FCC part 15.247

Peak output power conducted

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 85 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	

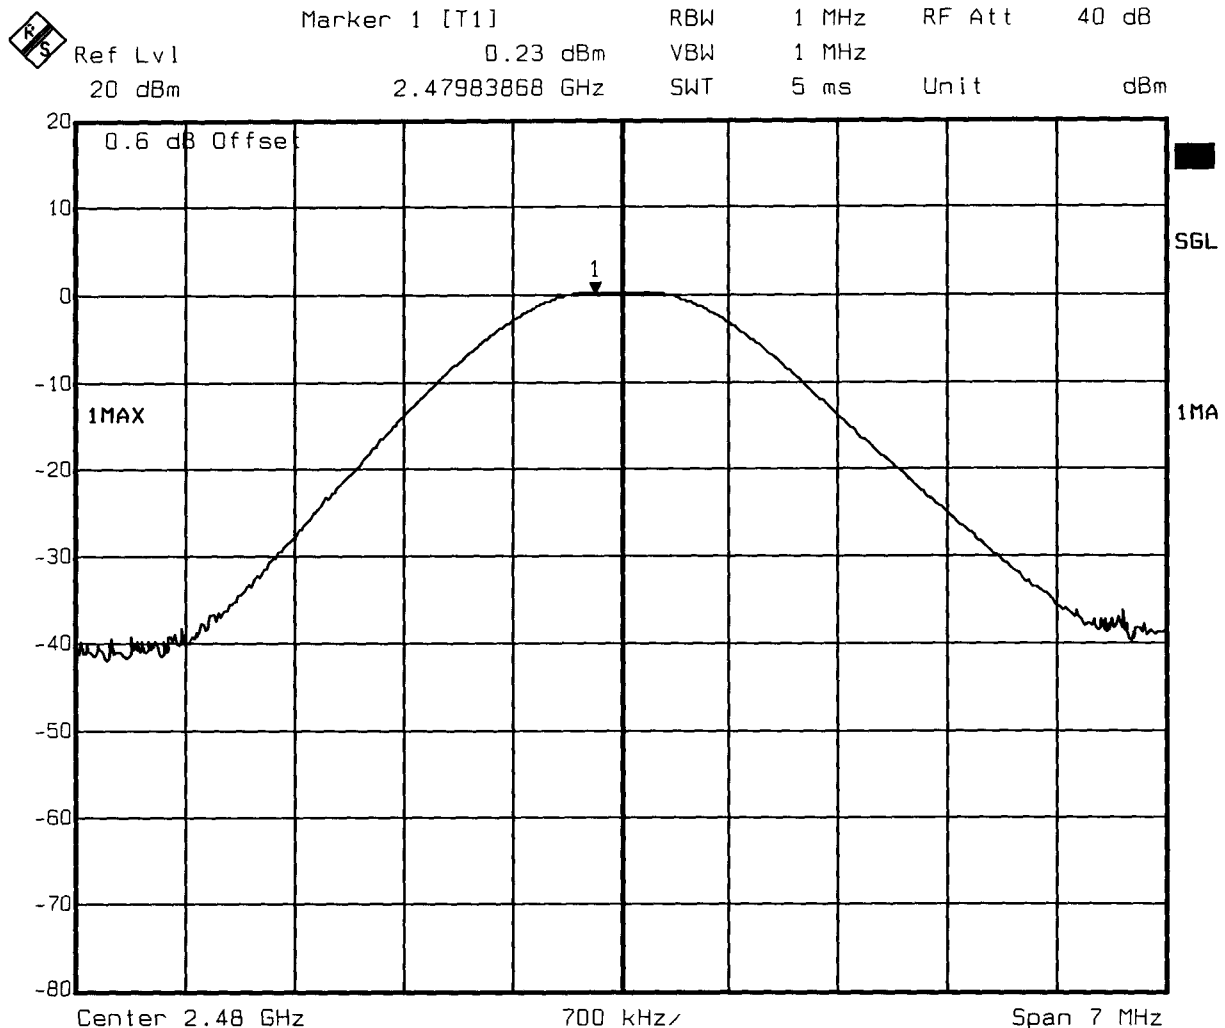


Date: 26.APR.2006 12:48:29

Measurement diagram

FCC part 15.247**Peak output power conducted**

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 115 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	

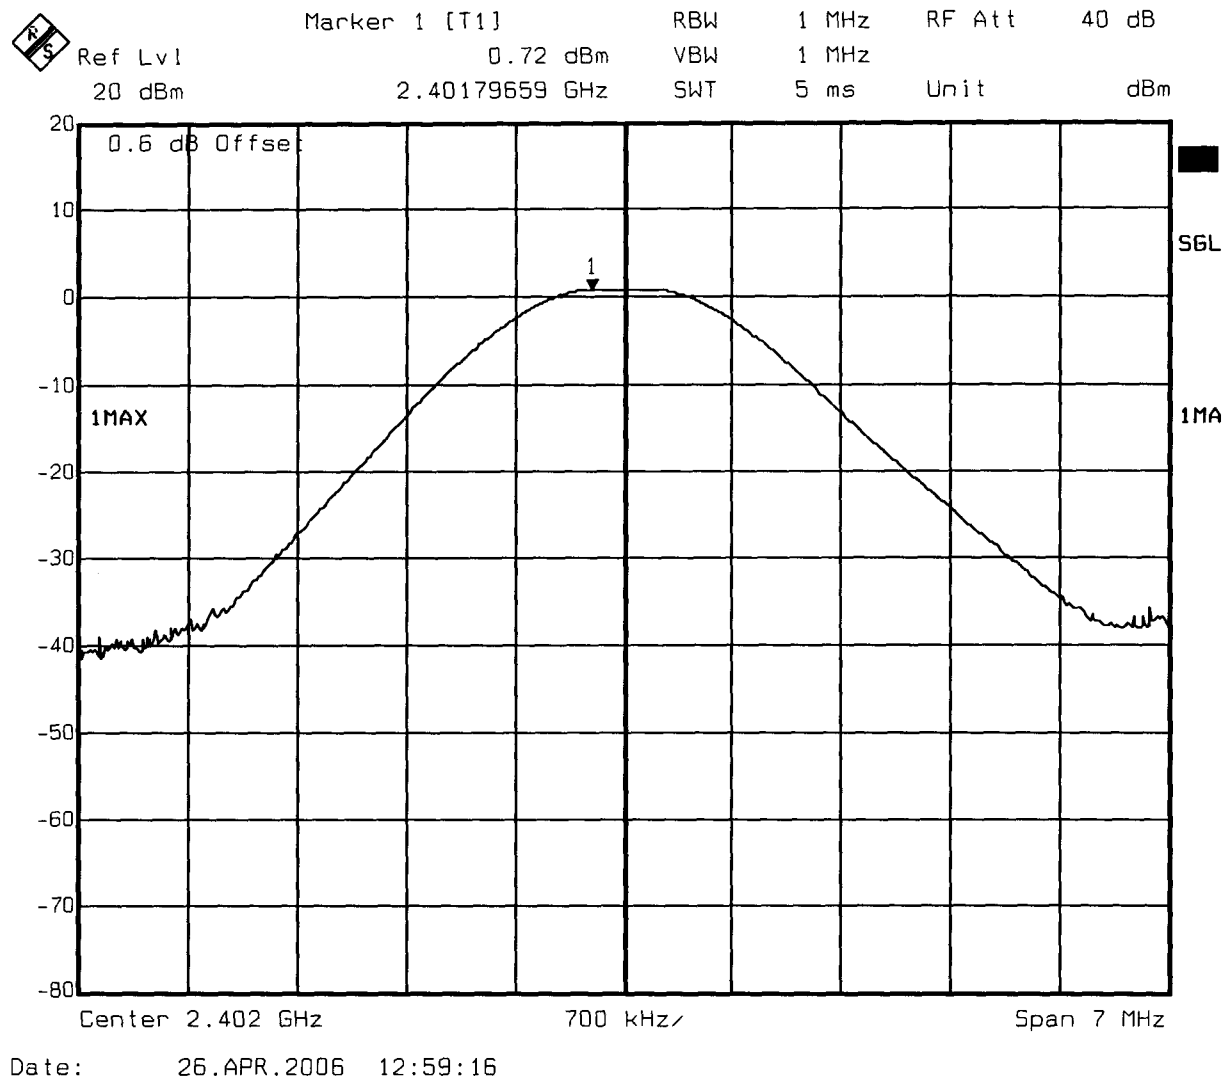


Measurement diagram

FCC part 15.247

Peak output power conducted

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 115 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

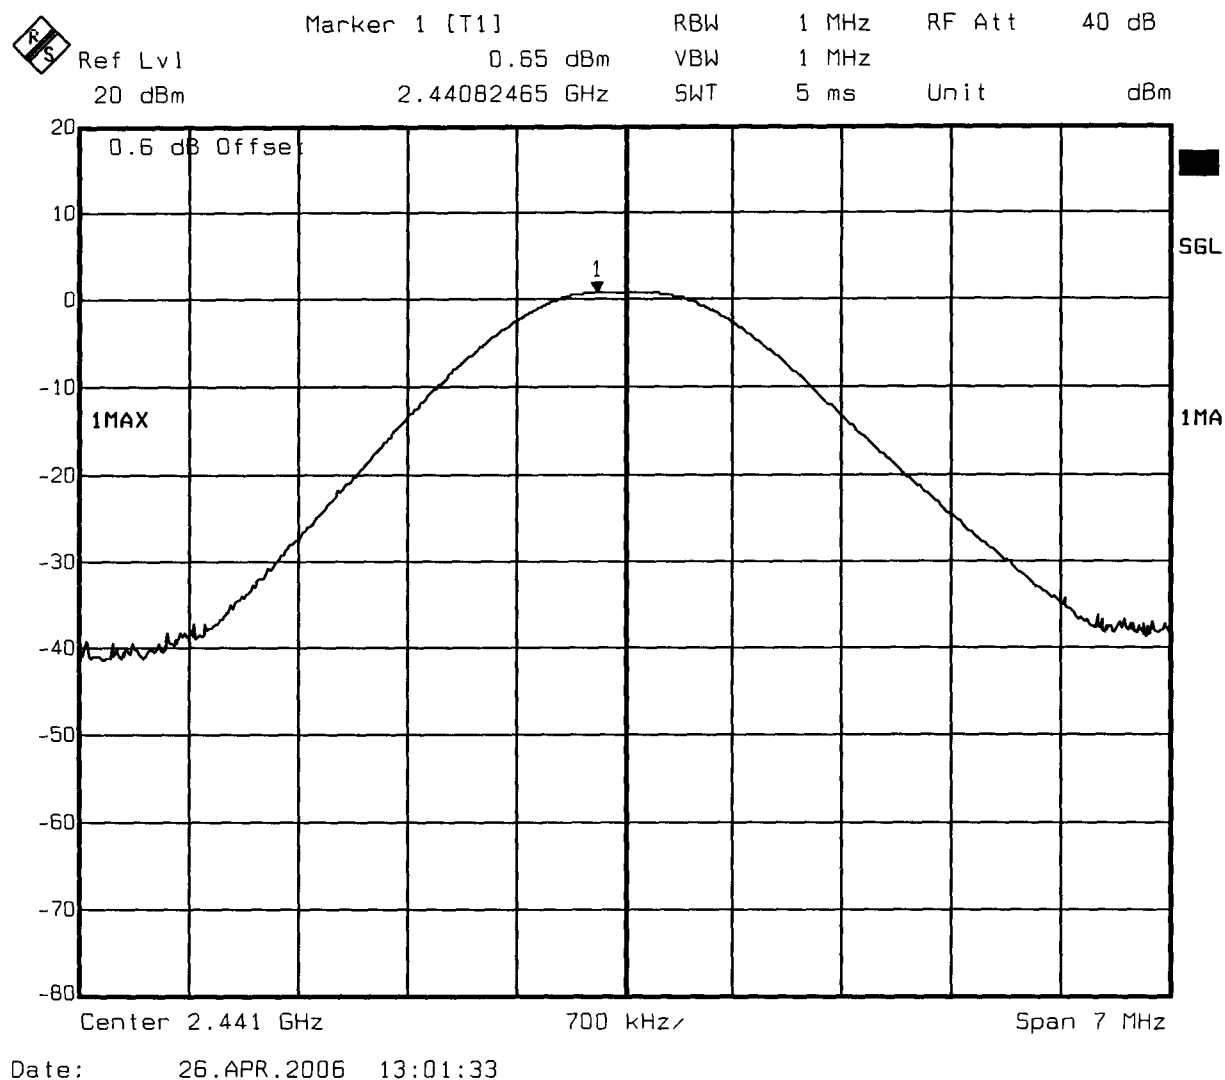


Measurement diagram

FCC part 15.247

Peak output power conducted

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 115 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	

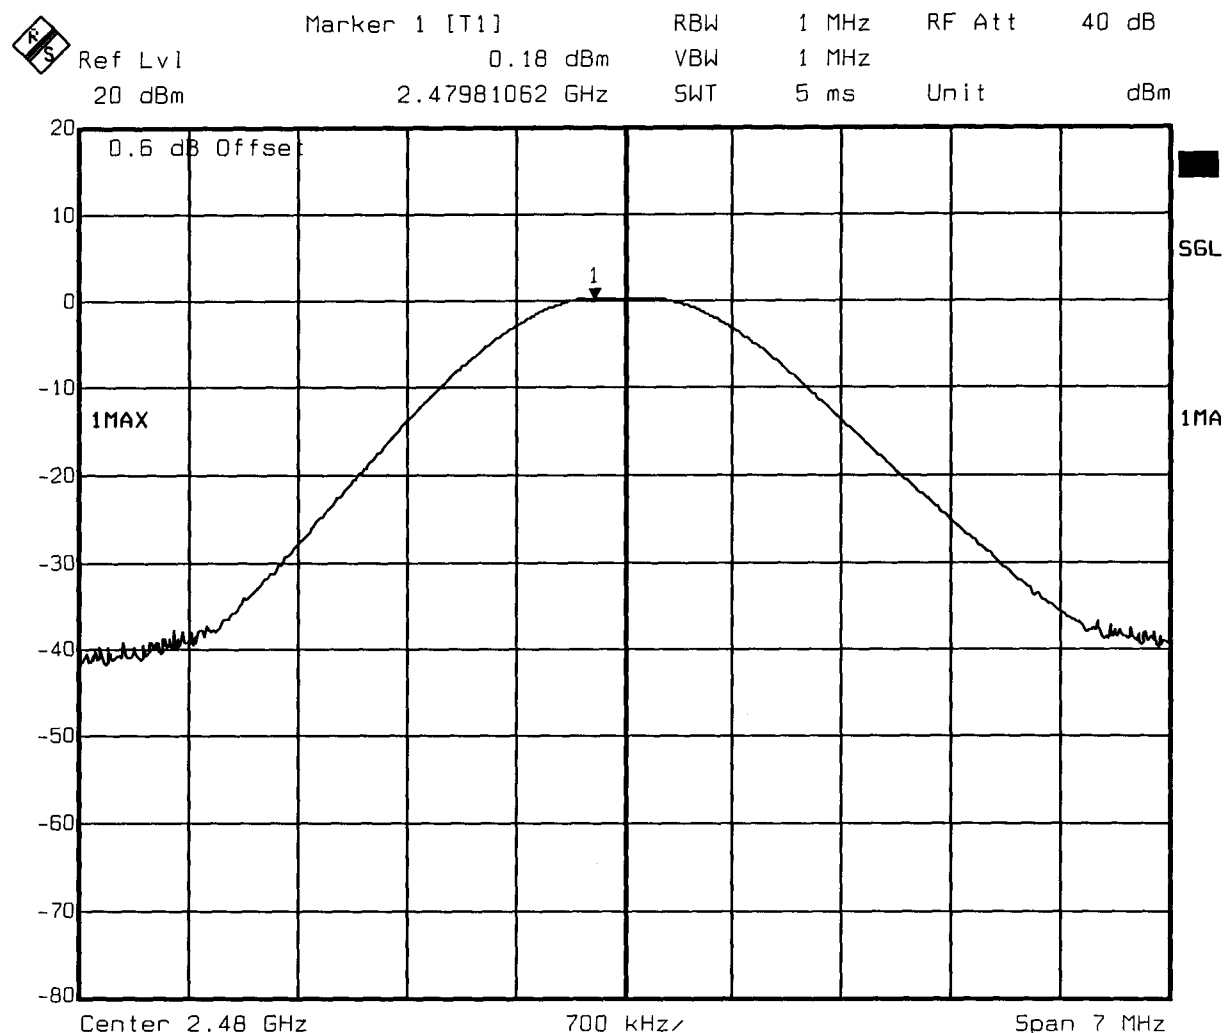

Date: 26.APR.2006 13:03:35

Measurement diagram

Appendix C


RF power output radiated (EIRP)

Appendix D

20 dB bandwidth

FCC part 15.247
20 dB bandwidth

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	

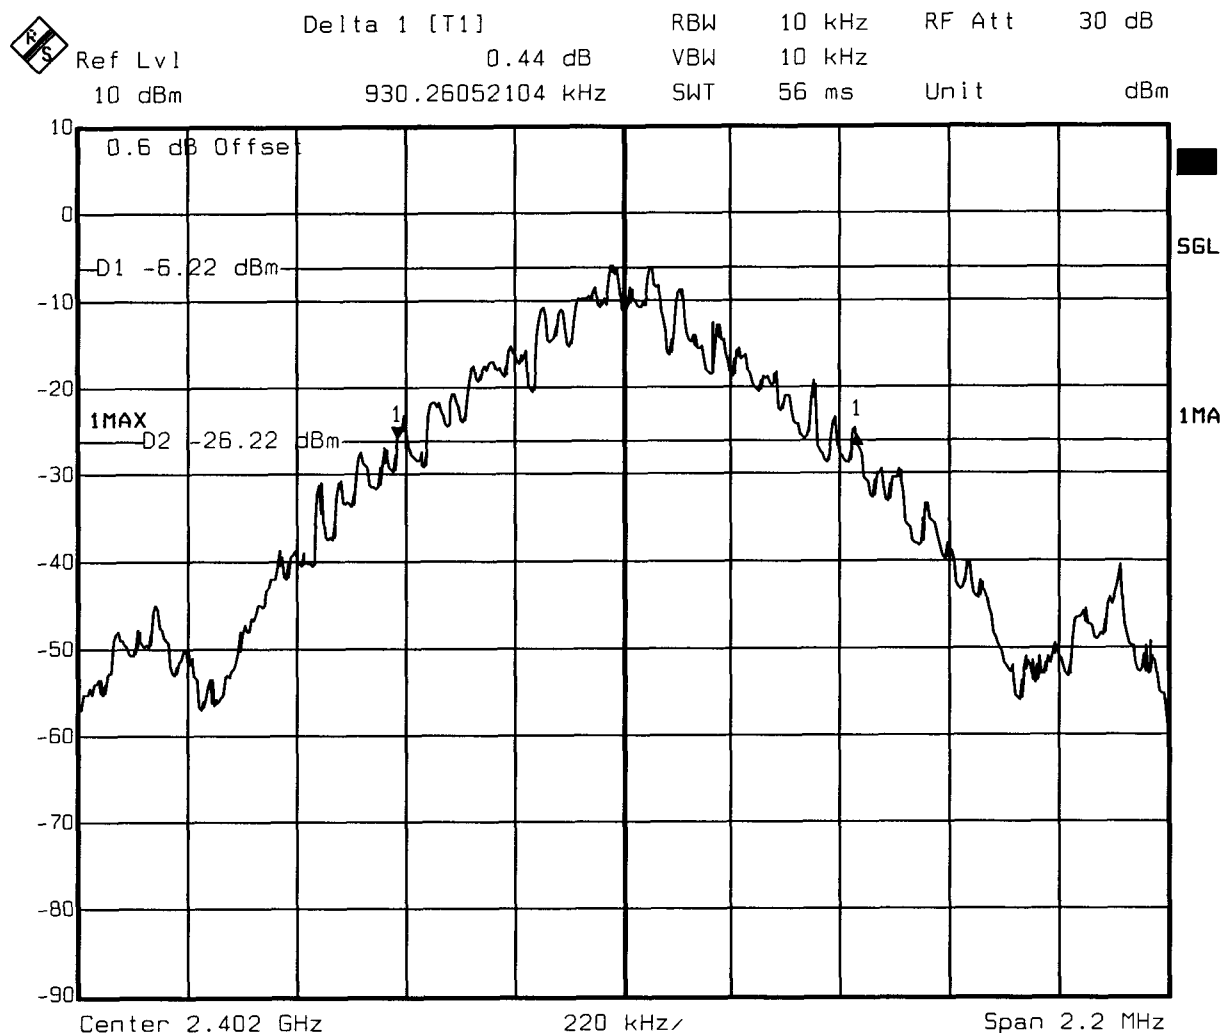


Date: 26.APR.2006 13:08:47

Measurement diagram

FCC part 15.247
20 dB bandwidth

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

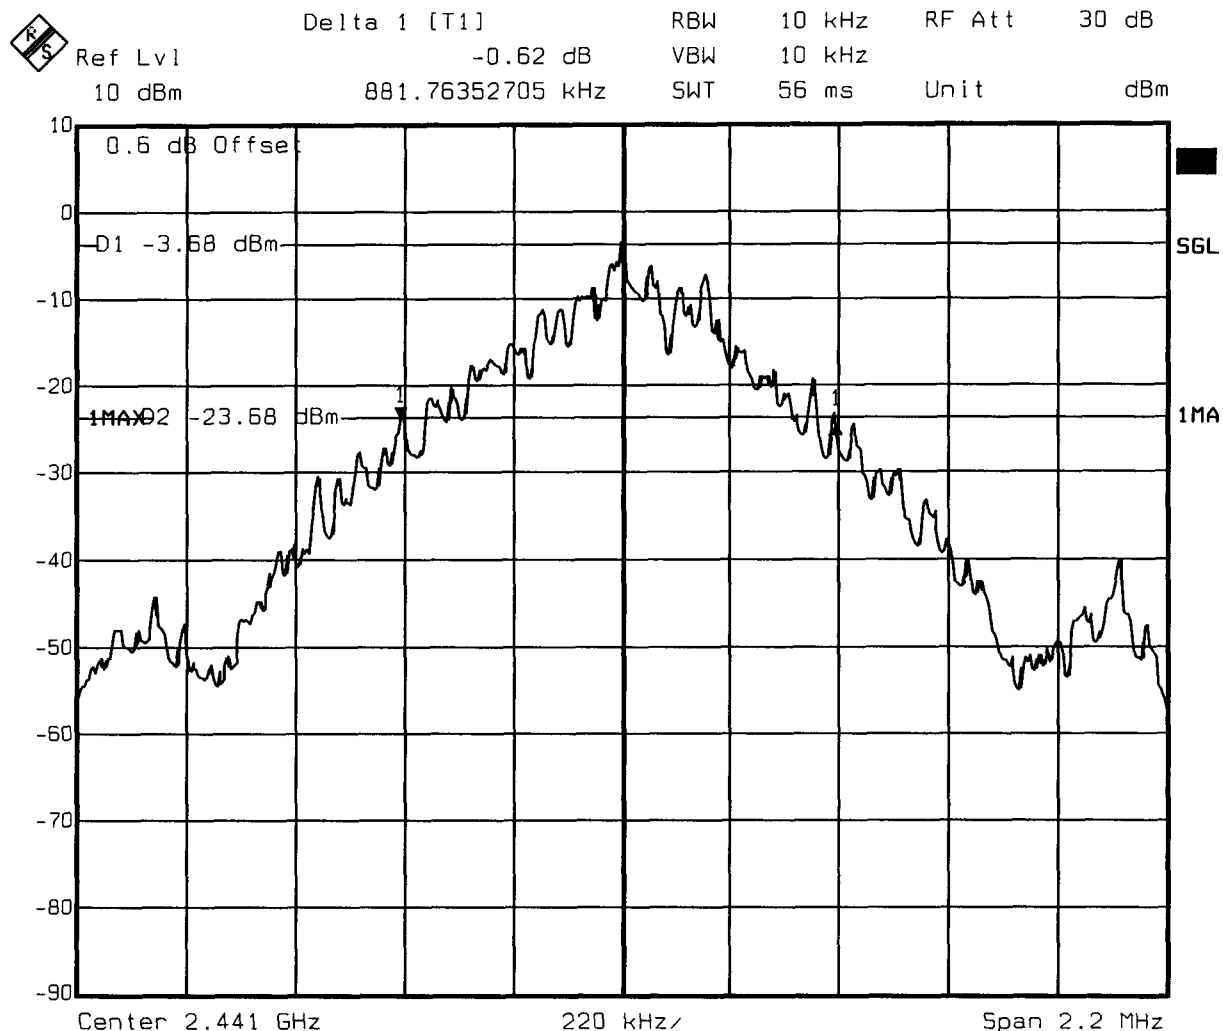


Date: 26.APR.2006 13:12:44

Measurement diagram

FCC part 15.247
20 dB bandwidth

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	

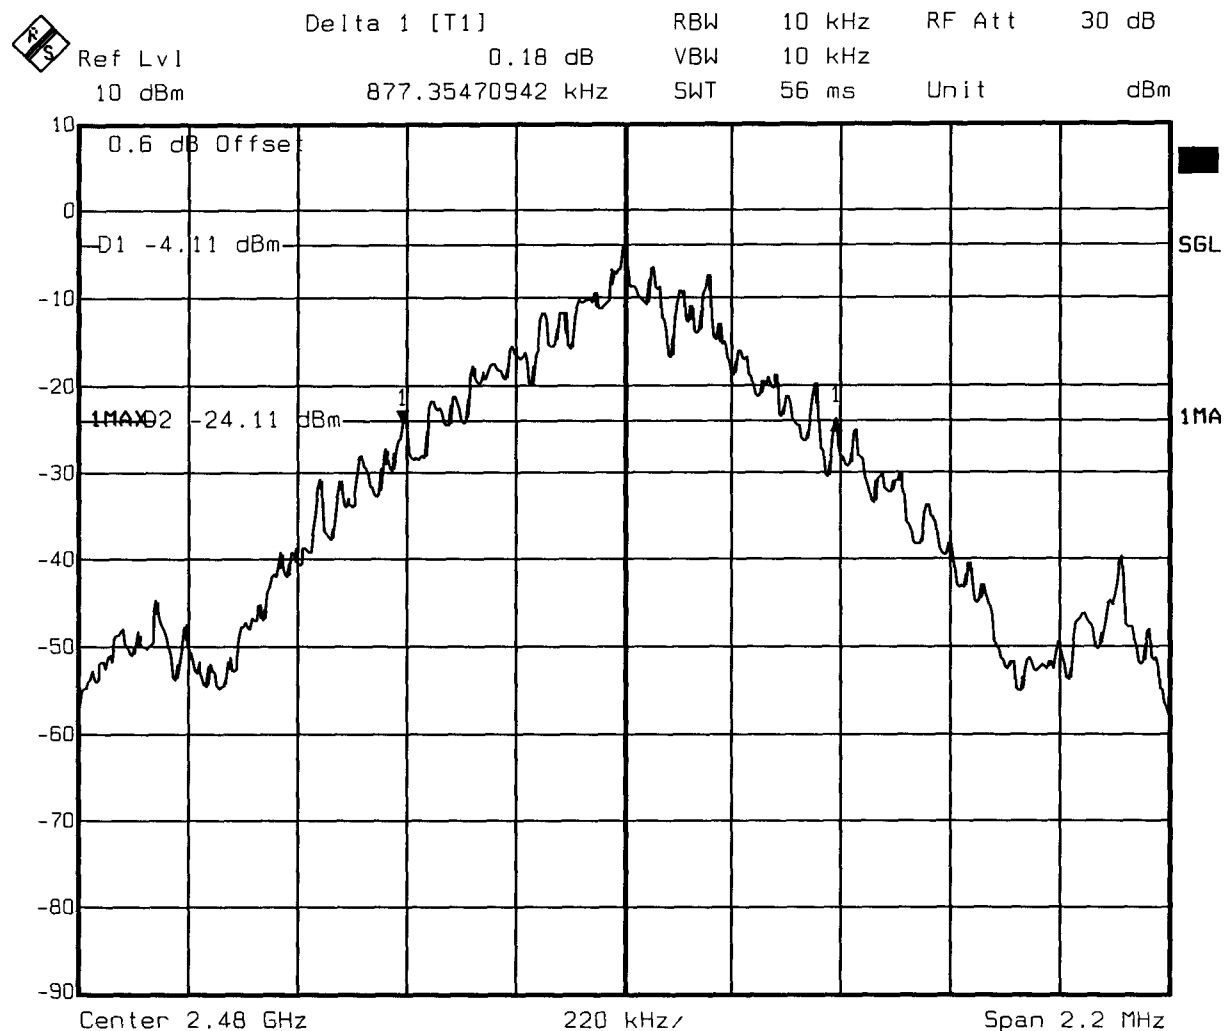

Date: 26.APR.2006 13:18:04


Measurement diagram

Appendix E

Time of occupancy (dwell time)

FCC part 15.247**Time of occupancy (dwell time)**

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Time of occupancy
Comment 2	Channel.: 39 / 2441 MHz (Hopping mode)
Comment 3	63 events * 2.920 ms result: 183.960 ms

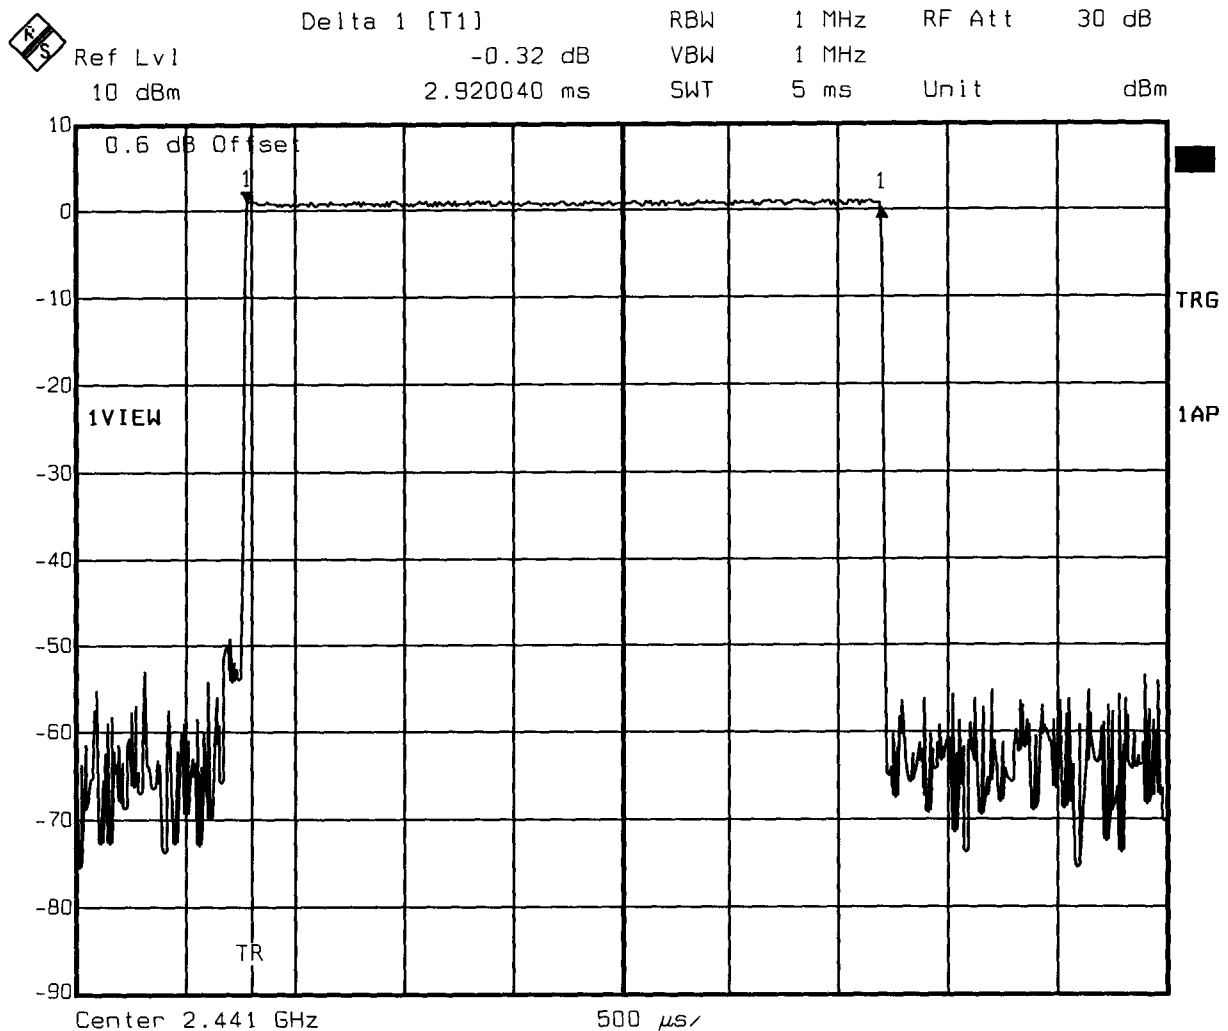


Date: 27.APR.2006 07:40:44

Measurement diagram

FCC part 15.247

Time of occupancy (dwell time)

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Time of occupancy
Comment 2	Channel.: 39 / 2441 MHz (Master inquiry mode)
Comment 3	310 events * 0.117836 ms result: 36.529 ms

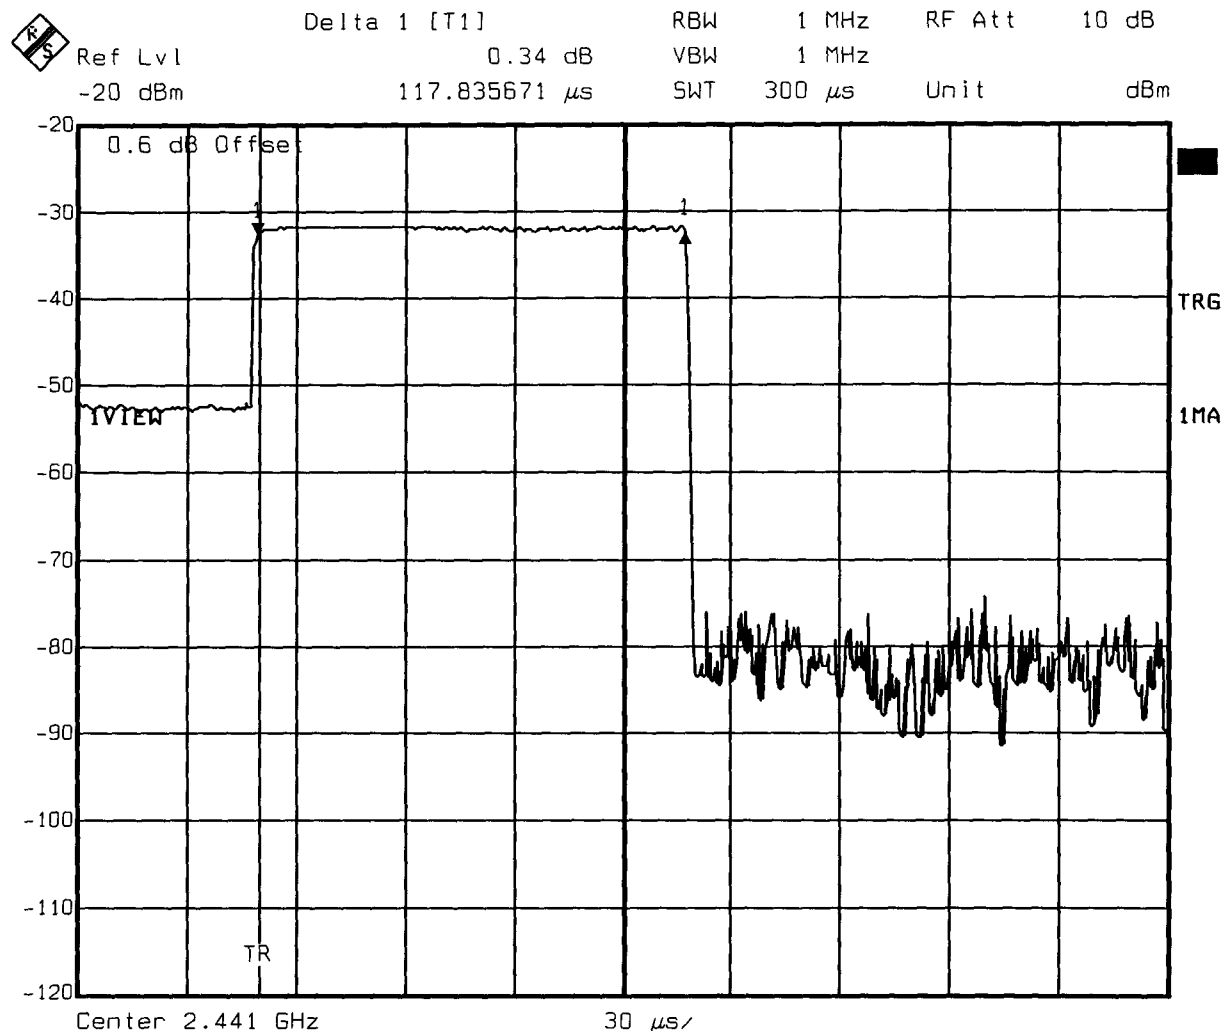


Date: 27.APR.2006 10:49:24

Measurement diagram

FCC part 15.247
Duty cycle

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Duty cycle
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

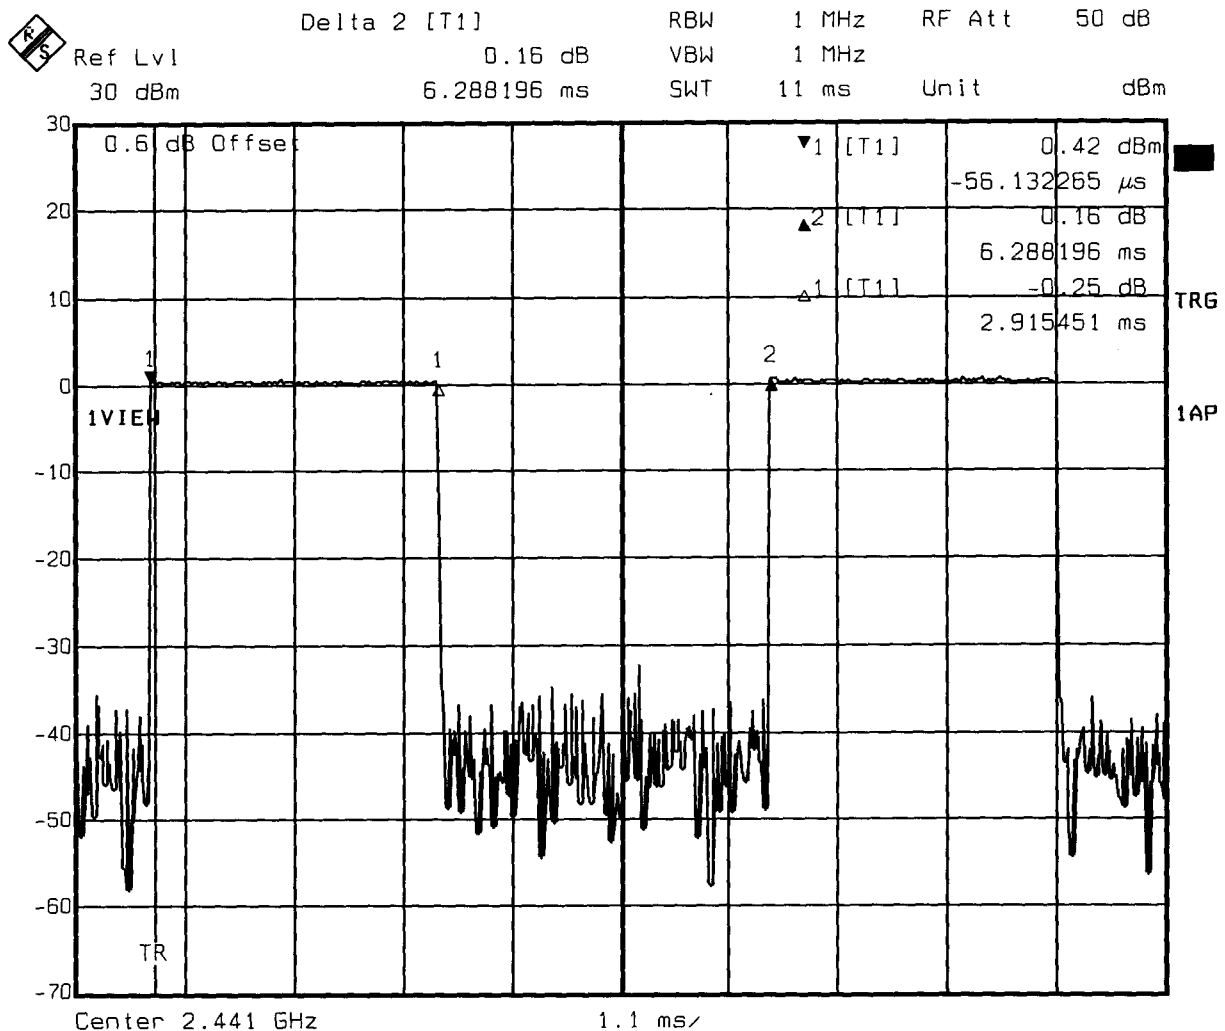

Date: 26.APR.2006 14:09:04


Measurement diagram

Appendix F

Number of hopping frequencies

FCC part 15.247**Number of hopping frequencies**


EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 0-13
Comment 3	

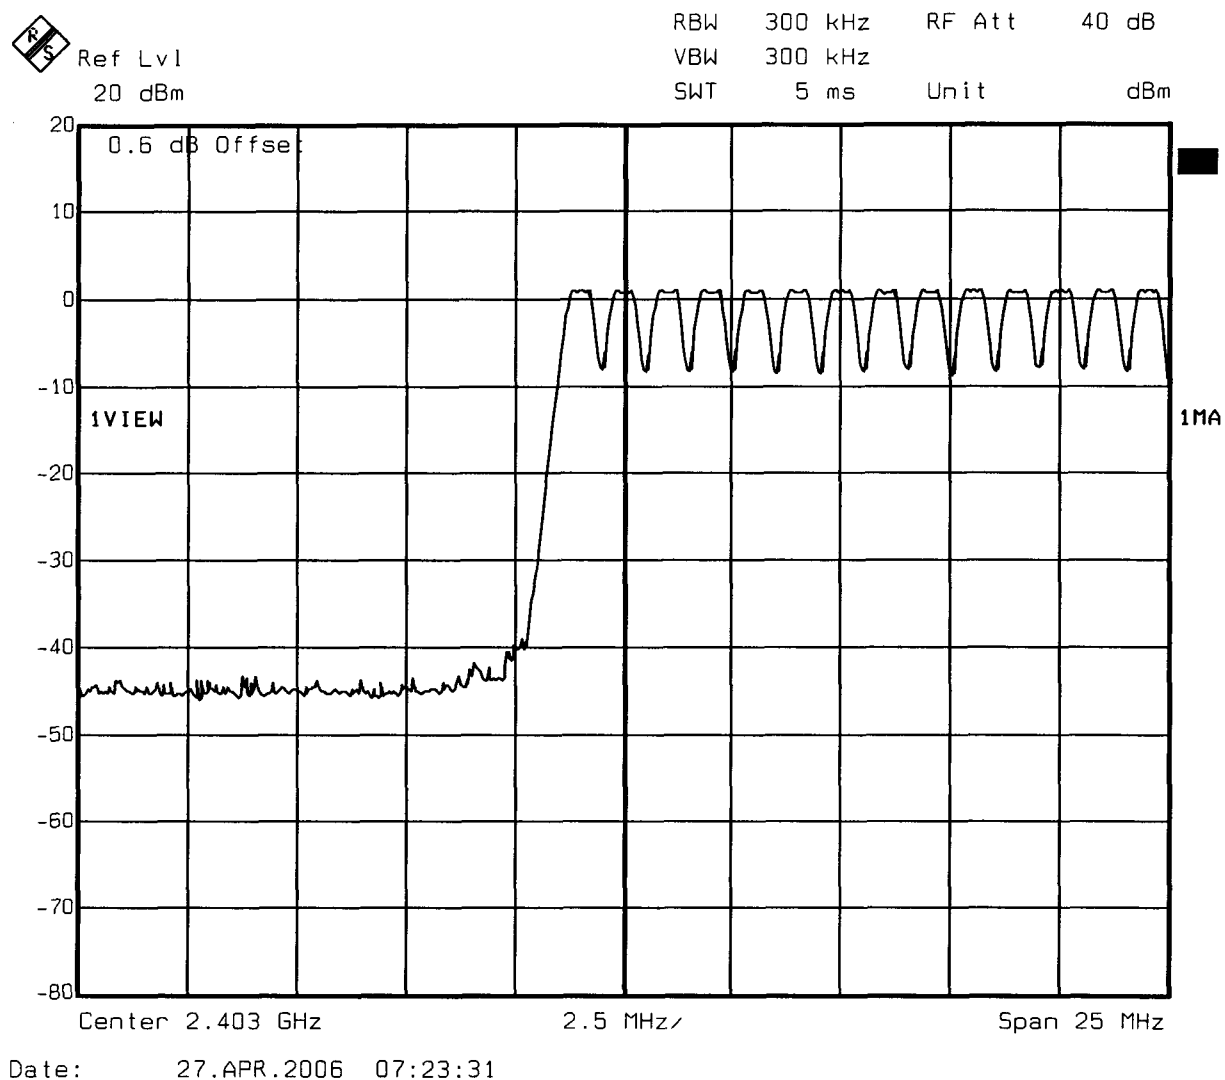

Measurement diagram

FCC part 15.247**Number of hopping frequencies**


EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 14-38
Comment 3	

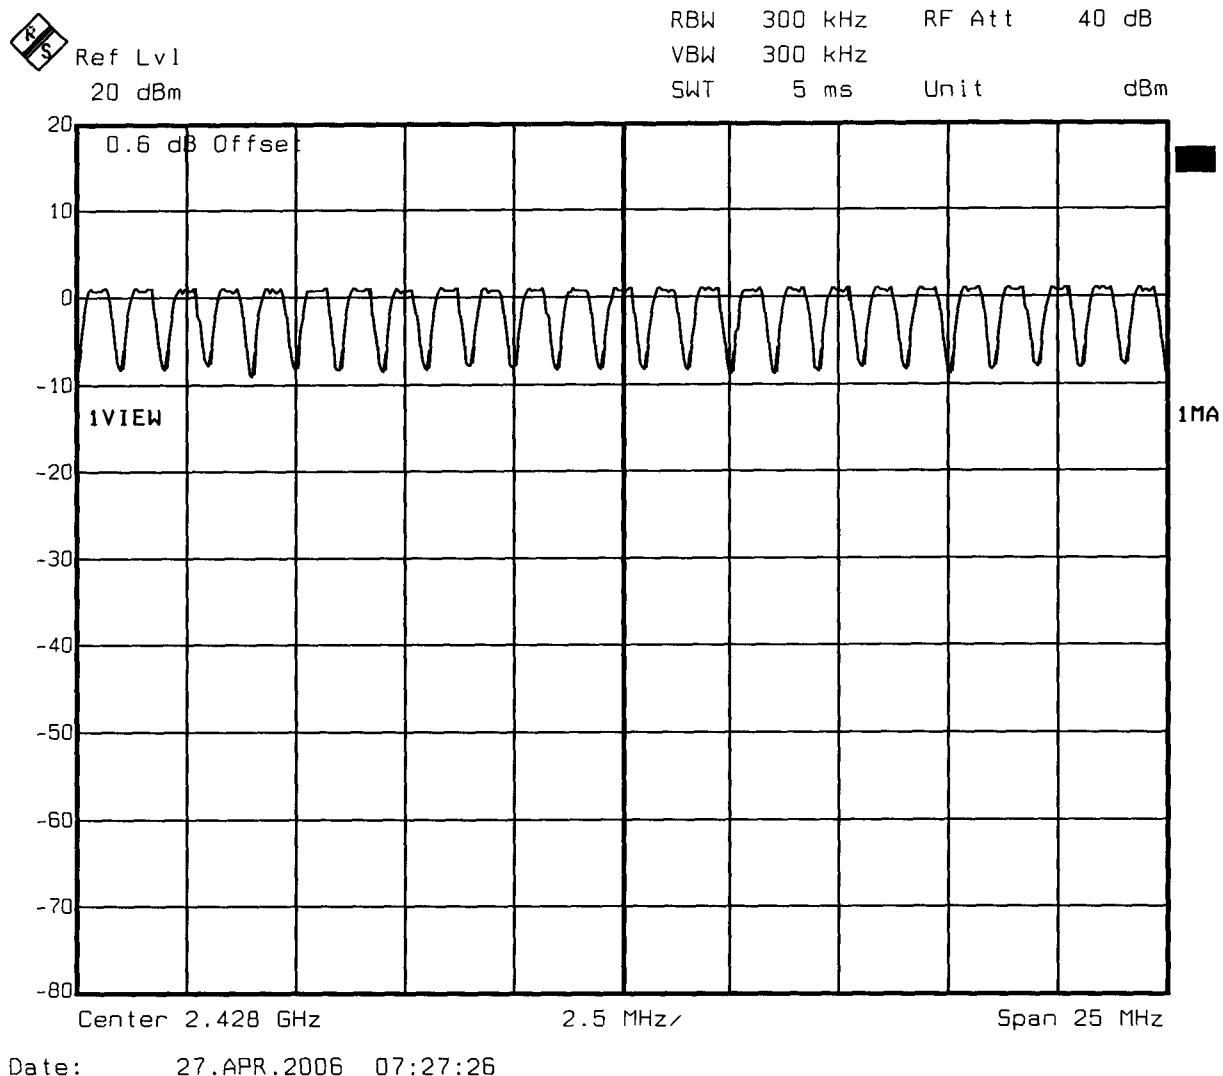

Measurement diagram

FCC part 15.247**Number of hopping frequencies**

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.:39-63
Comment 3	

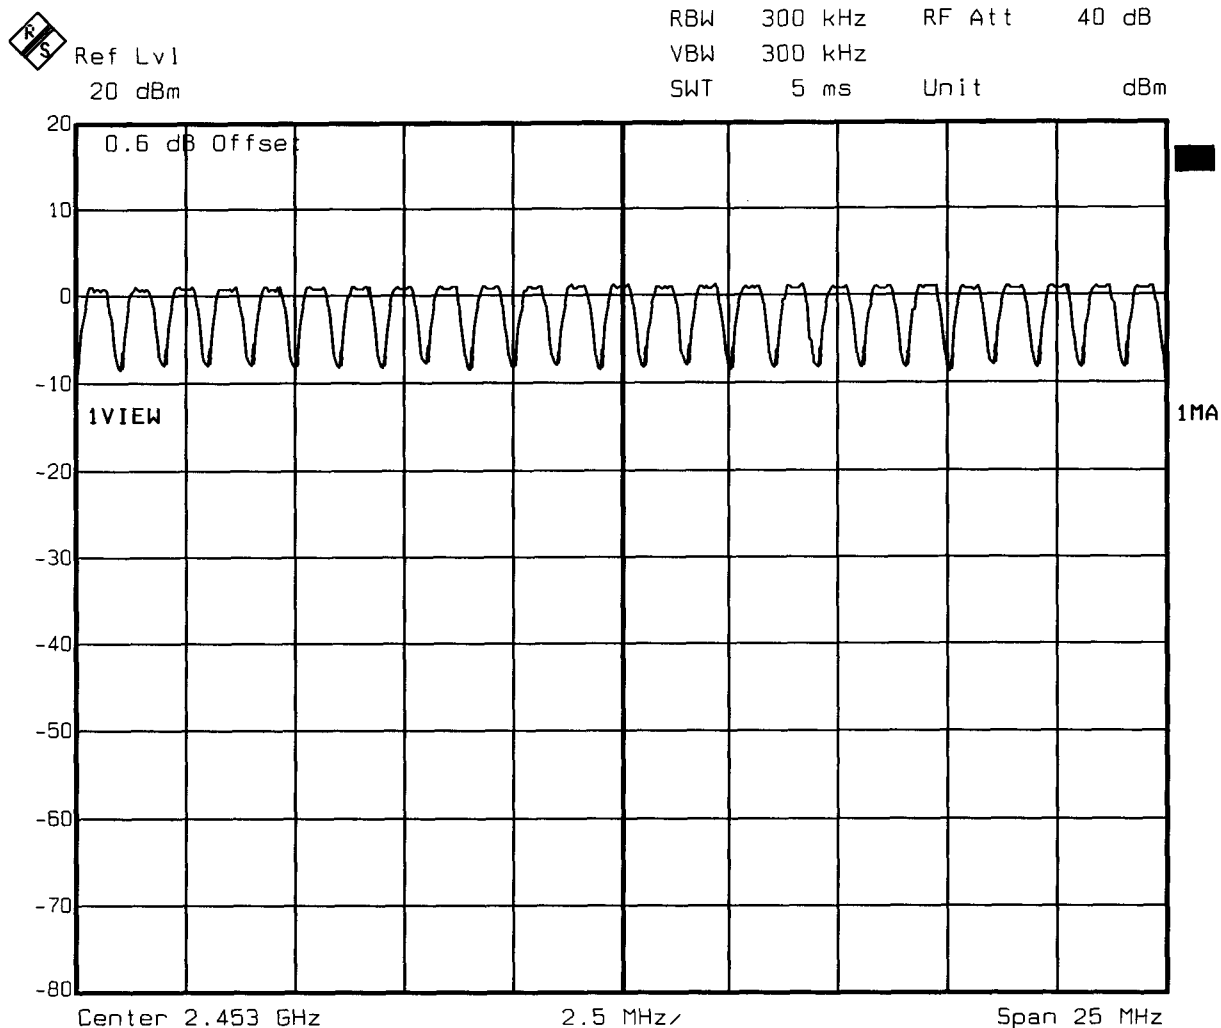


Date: 27.APR.2006 07:30:19

Measurement diagram

FCC part 15.247

Number of hopping frequencies

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 64-78
Comment 3	

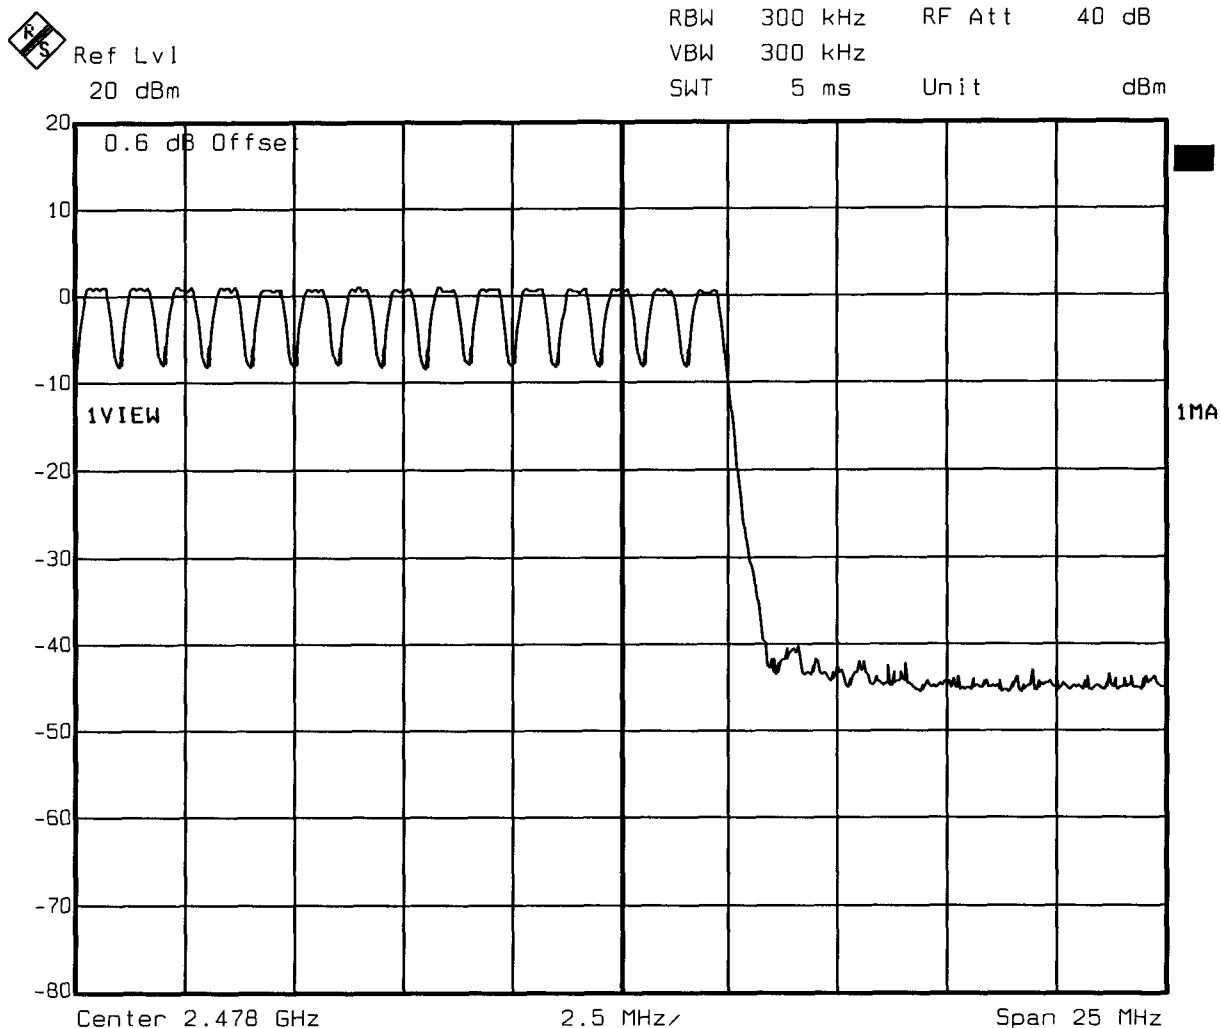


Date: 27.APR.2006 07:35:12

Measurement diagram

FCC part 15.247

Number of hopping frequencies

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Master inquiry mode
Comment 3	

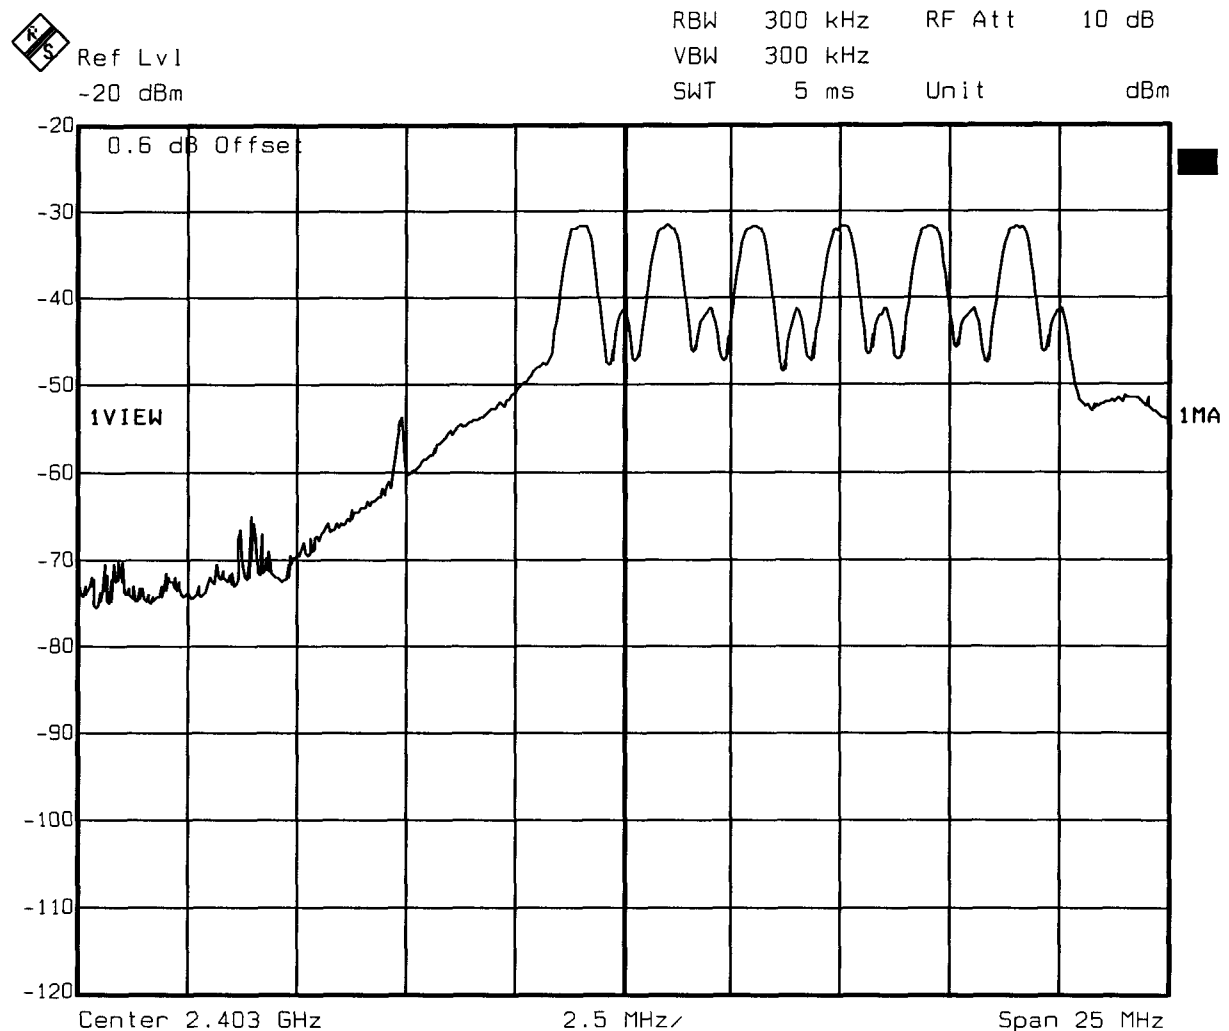


Date: 27.APR.2006 08:41:15

Measurement diagram

FCC part 15.247**Number of hopping frequencies**

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Master inquiry mode
Comment 3	

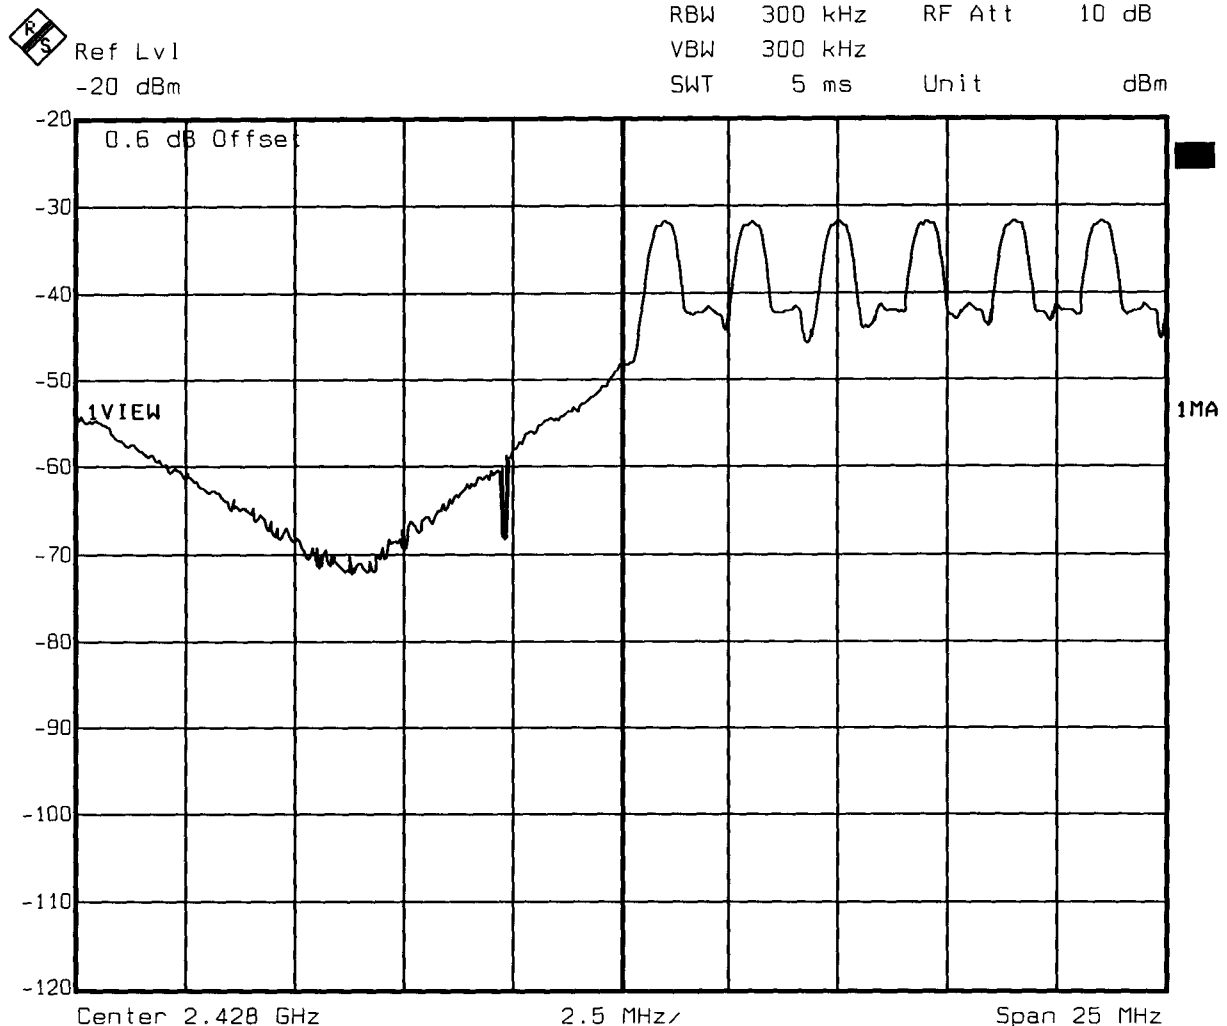


Date: 27.APR.2006 09:19:48

Measurement diagram

FCC part 15.247**Number of hopping frequencies**

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Master inquiry mode
Comment 3	

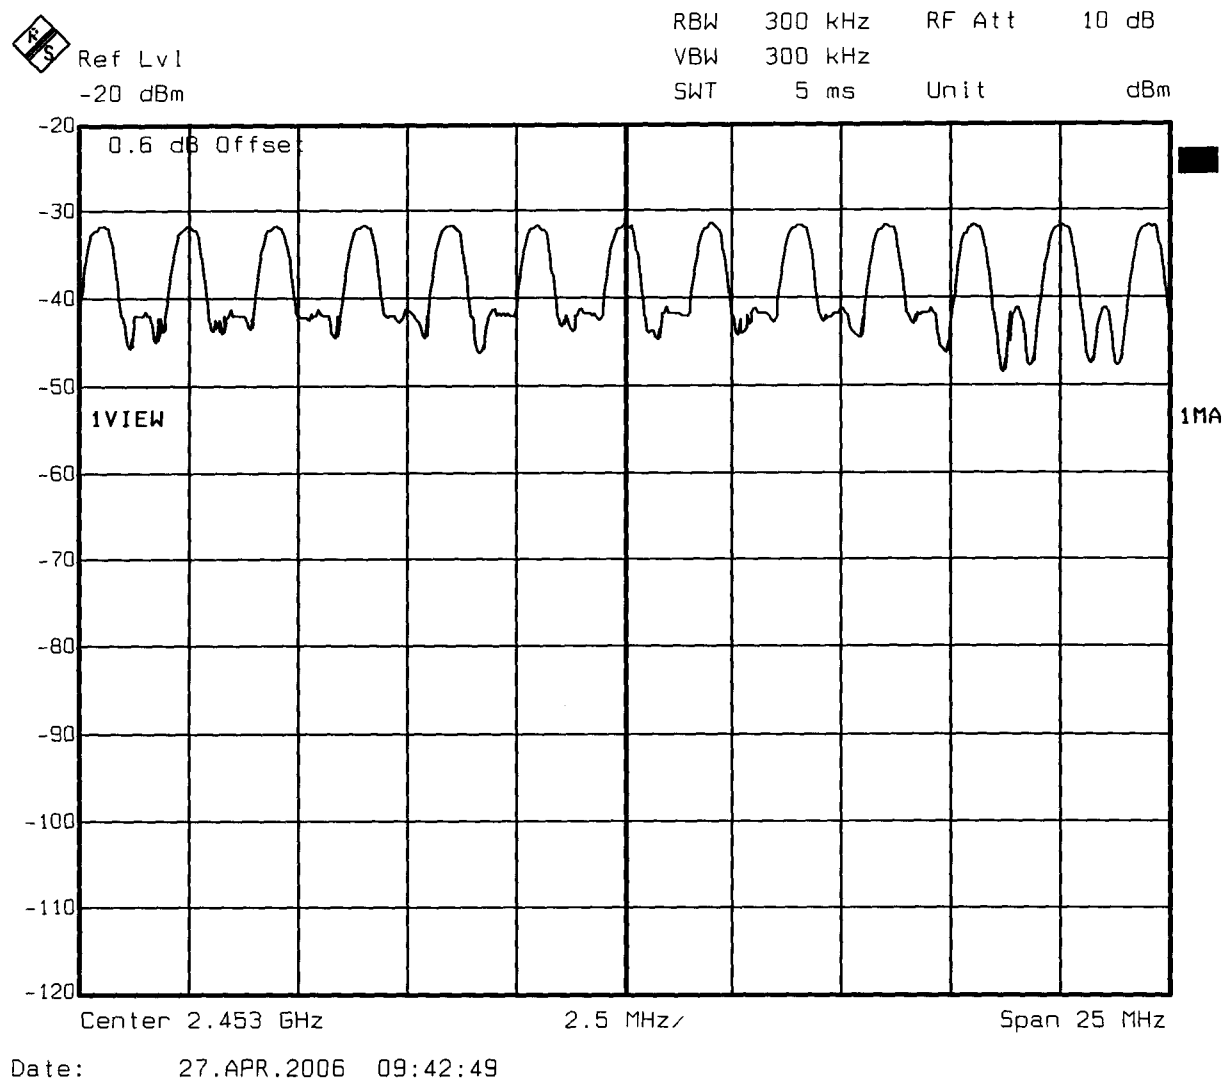


Measurement diagram

FCC part 15.247

Number of hopping frequencies

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Master inquiry mode
Comment 3	

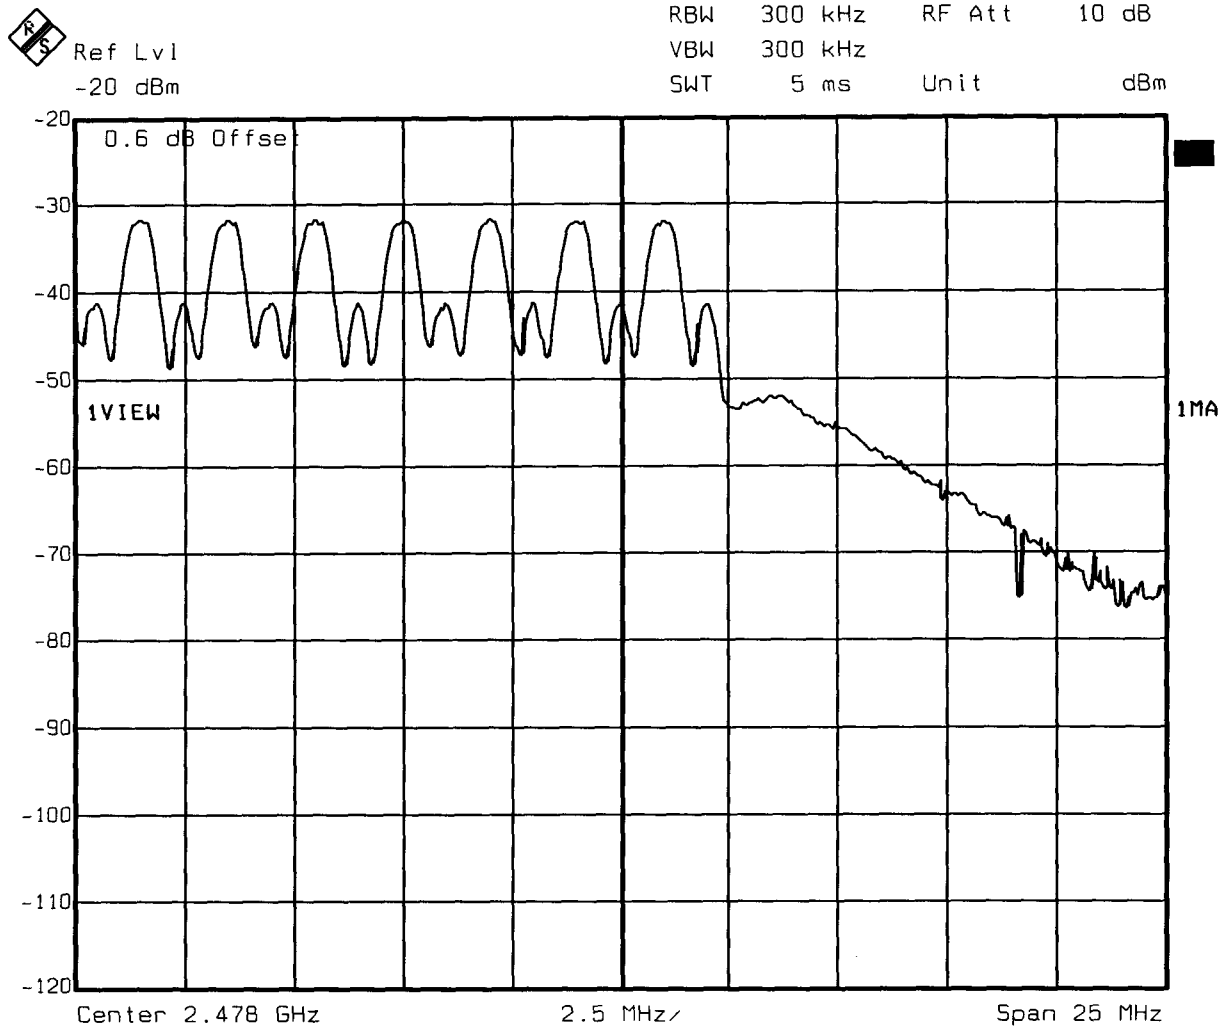

Date: 27.APR.2006 09:55:34

Measurement diagram


Appendix G

Carrier frequency separation

FCC part 15.247

Carrier frequency separation

EUT	Bluetooth office headset and base
Model	GN 5300base
Approval Holder	GN Netcom
Temperature / Voltage	23°C / 100 % Voltage
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Carrier frequency separation
Comment 2	Channel.: 39/40 / 2441/2442 MHz
Comment 3	Hopping mode

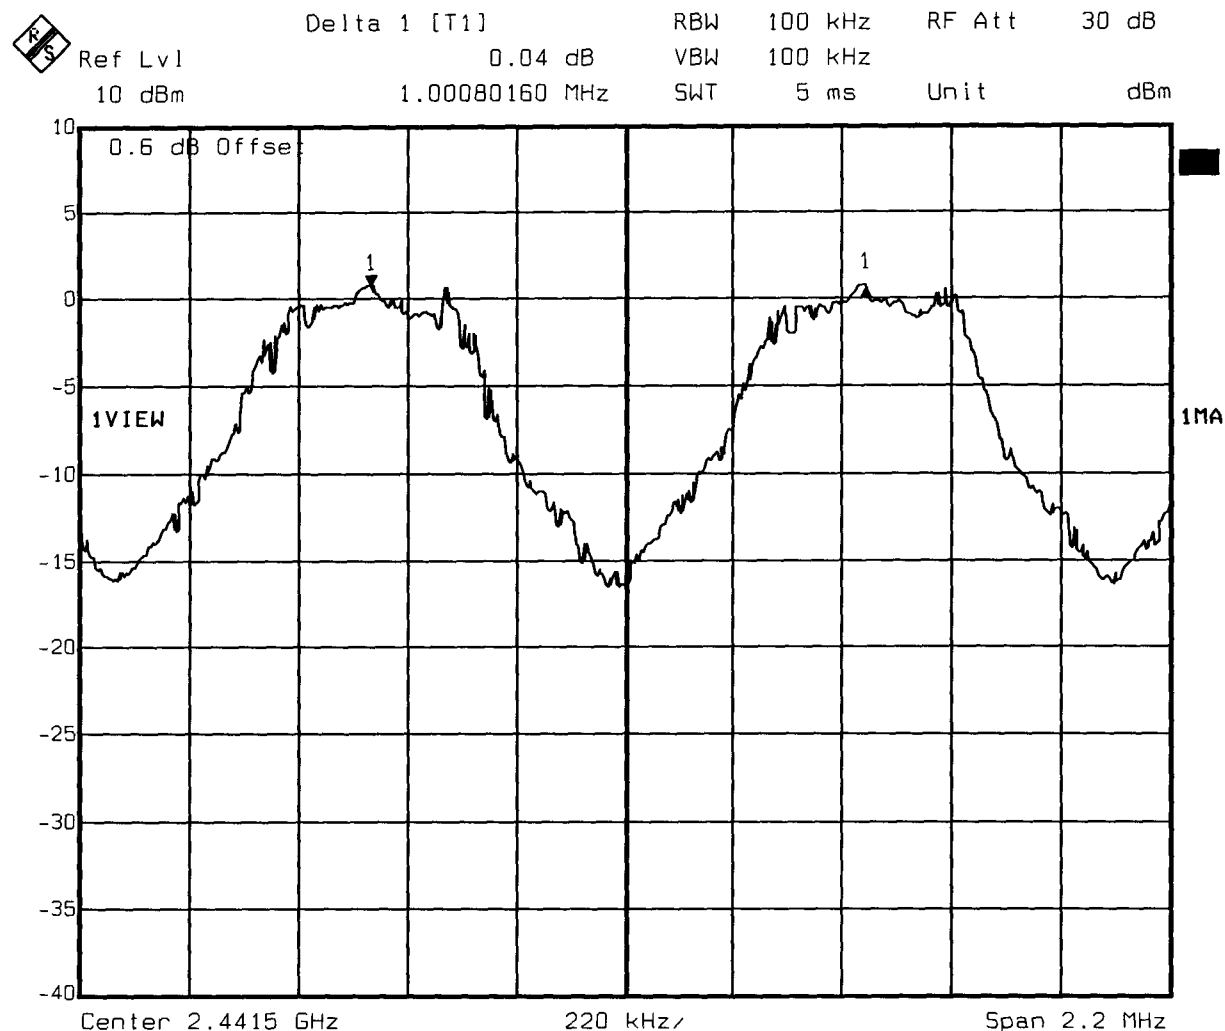

Date: 26.APR.2006 14:32:19

Measurement diagram

Appendix H

Spurious emission conducted


Appendix I

Spurious emission radiated

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Emax: 96.53dBµV/m, RBW: 100kHz

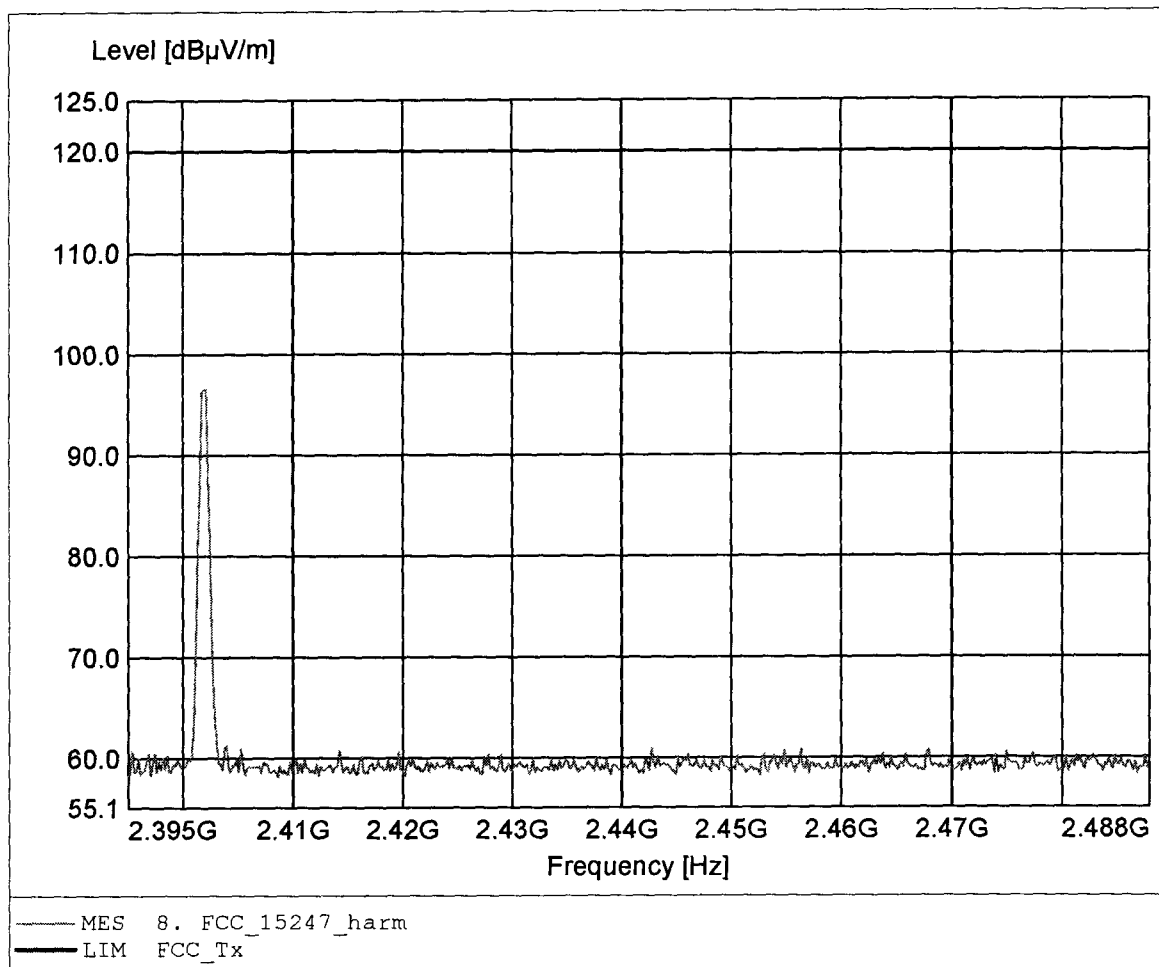

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 188.758MHz, Emax: 32.25dBμV/m, RBW: 100kHz

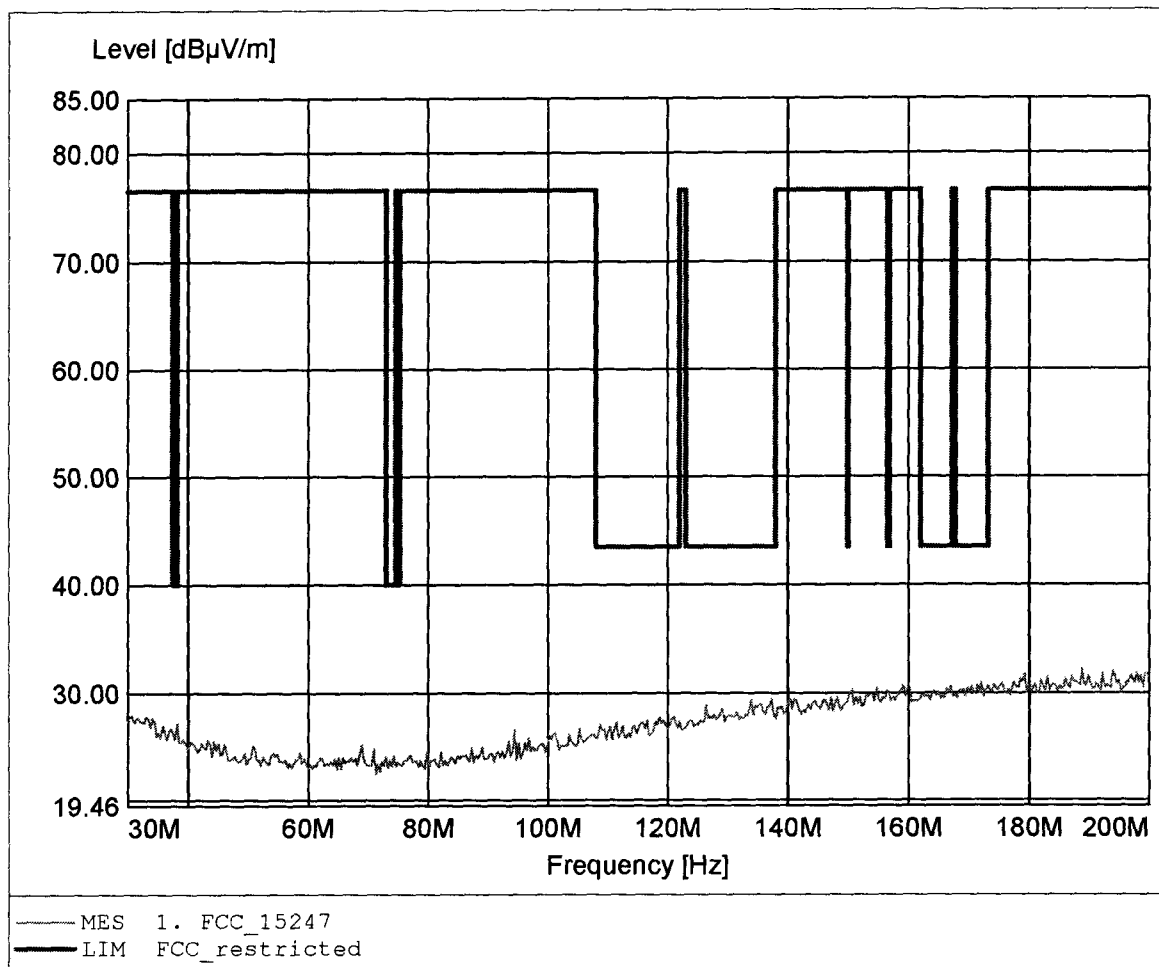

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.978MHz, Emax: 31.62dBμV/m, RBW: 100kHz

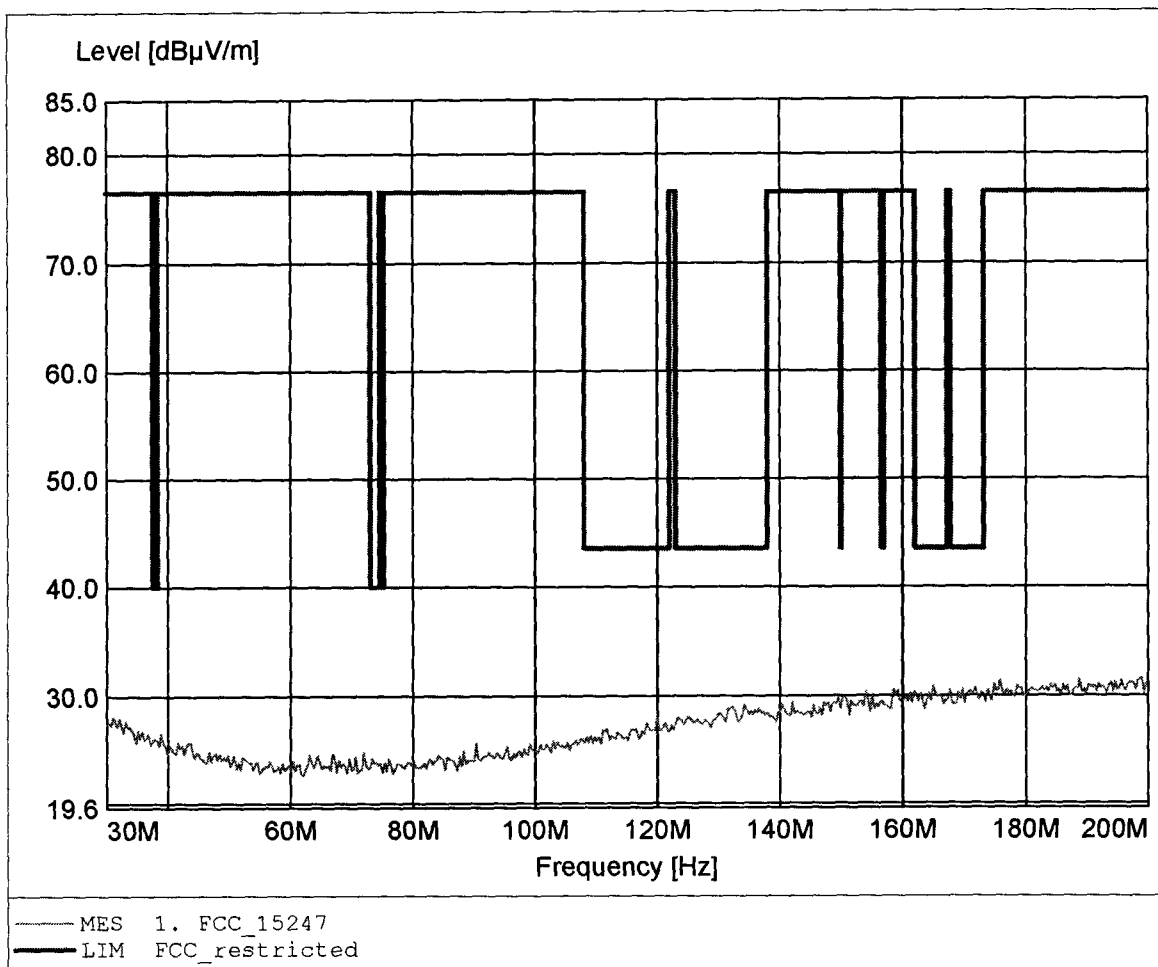

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 996.794MHz, Emax: 19.91dBµV/m, RBW: 100kHz

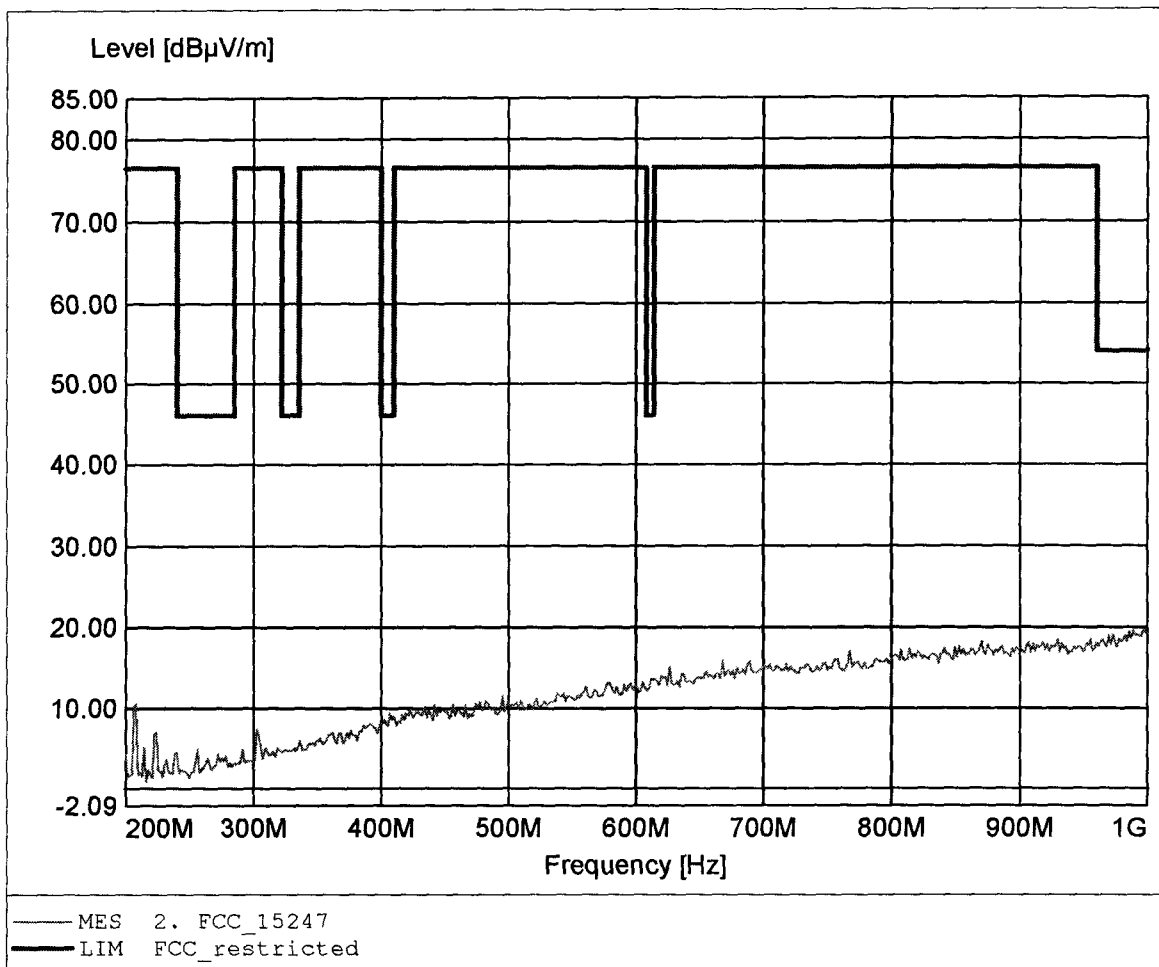

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 985.571MHz, Emax: 19.46dBµV/m, RBW: 100kHz

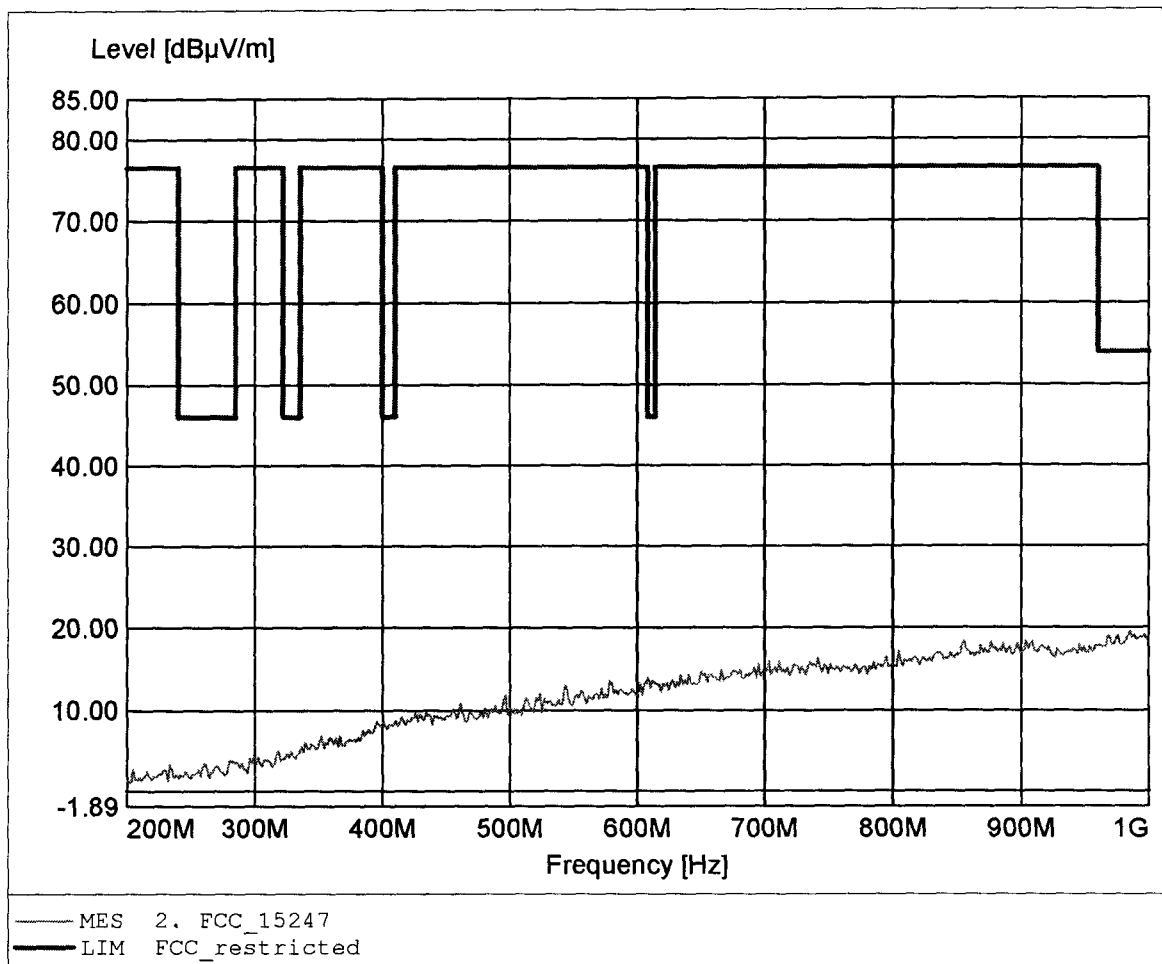

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.918GHz, Emax: 43.72dBμV/m, RBW: 1MHz

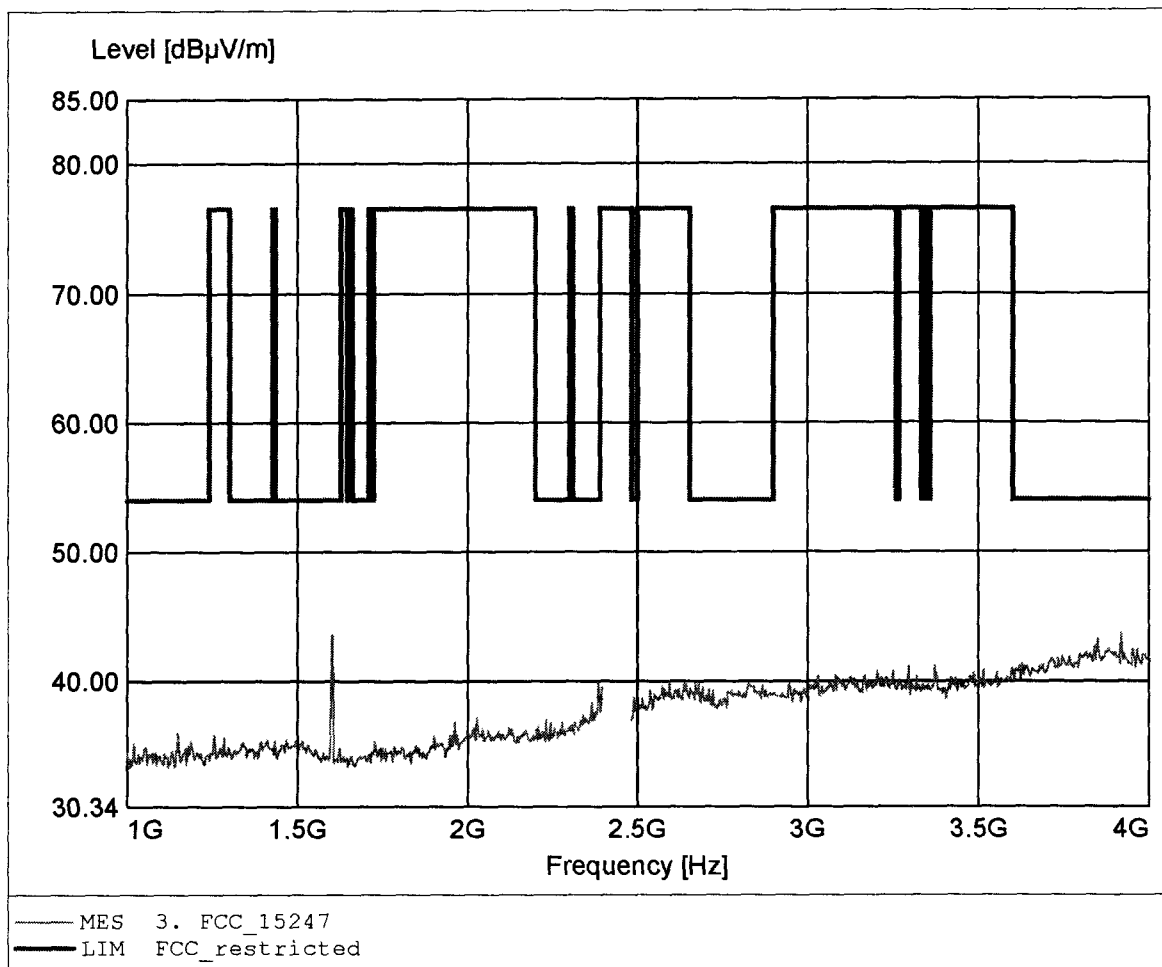

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 44.45dBµV/m, RBW: 1MHz

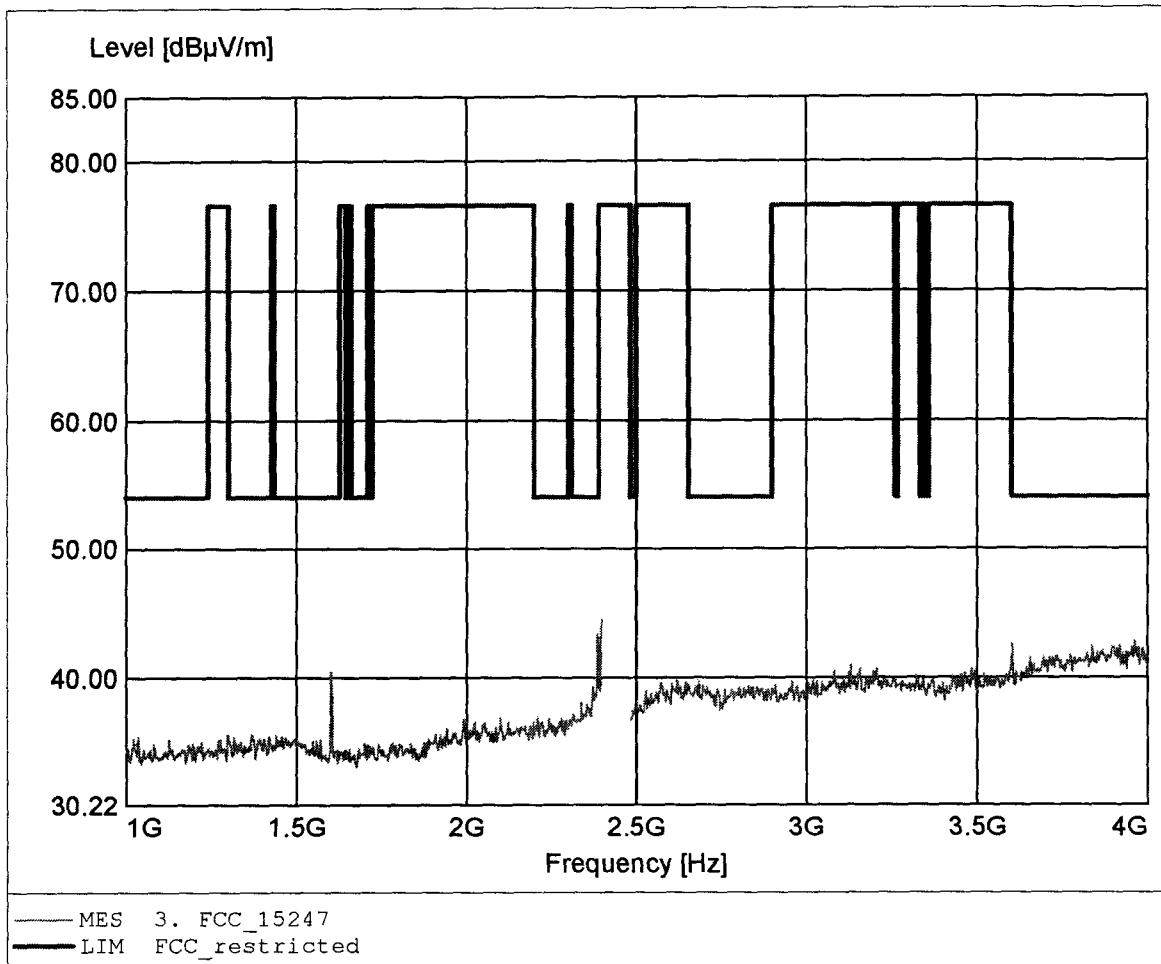

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 48.07dBμV/m, RBW: 1MHz

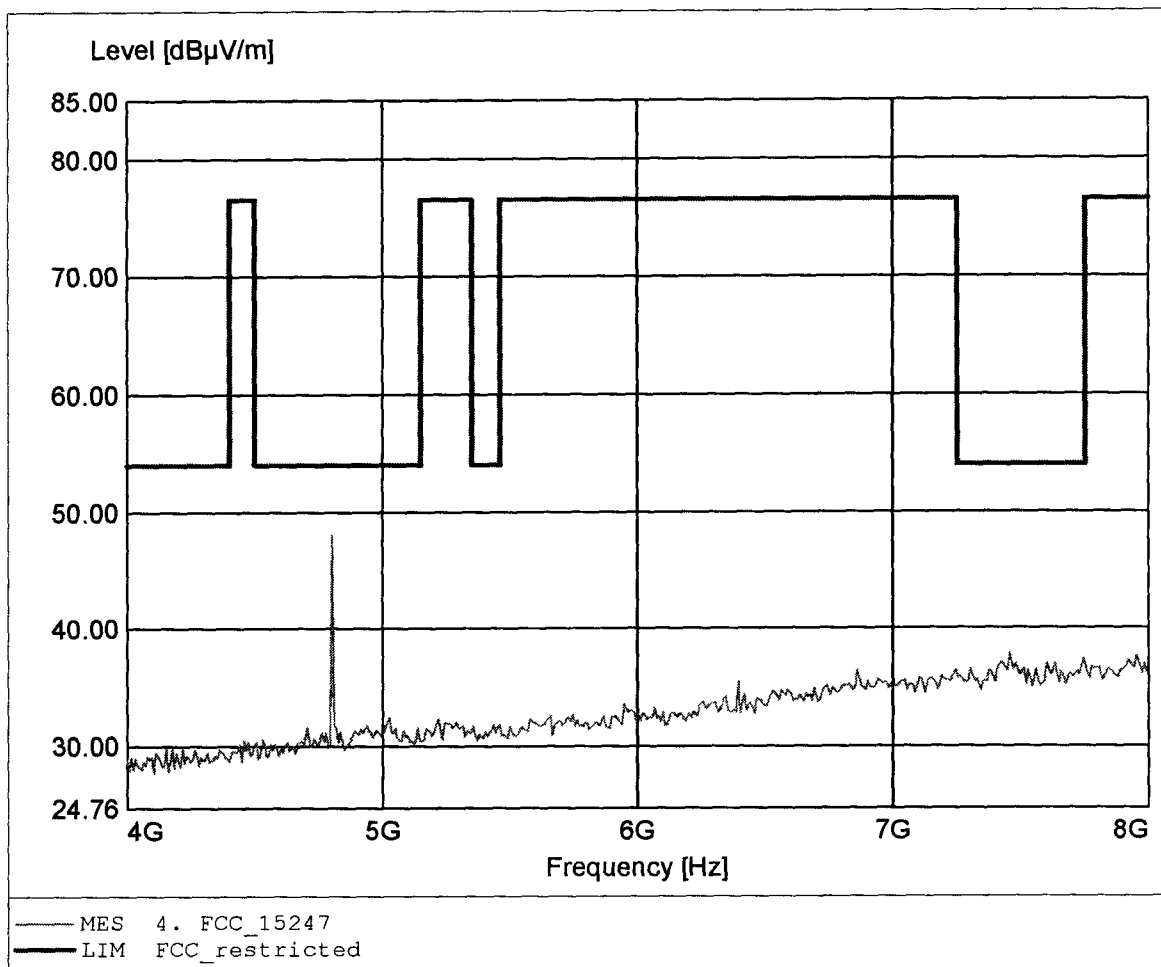

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 54.37dBμV/m, RBW: 1MHz

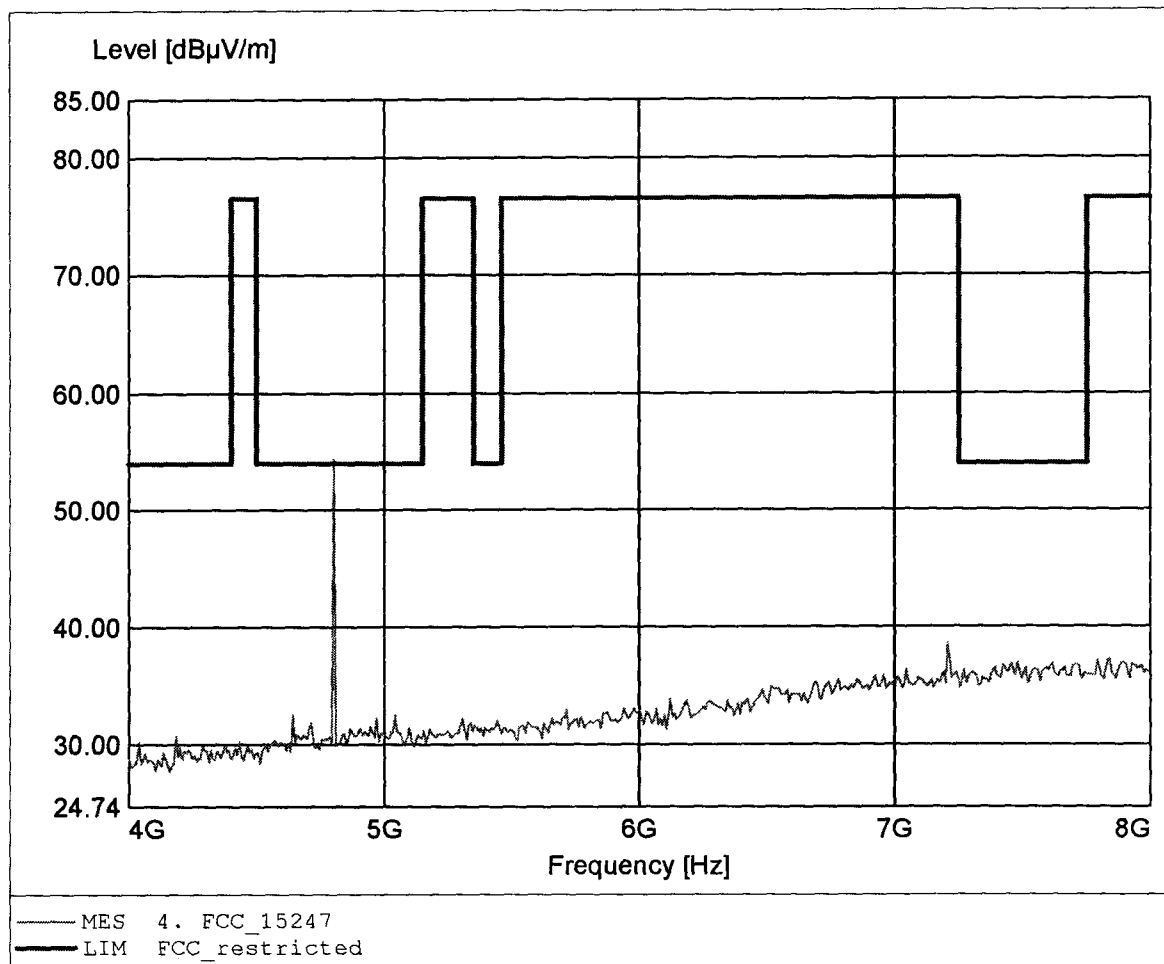

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 32.14dBμV/m, RBW: 1MHz

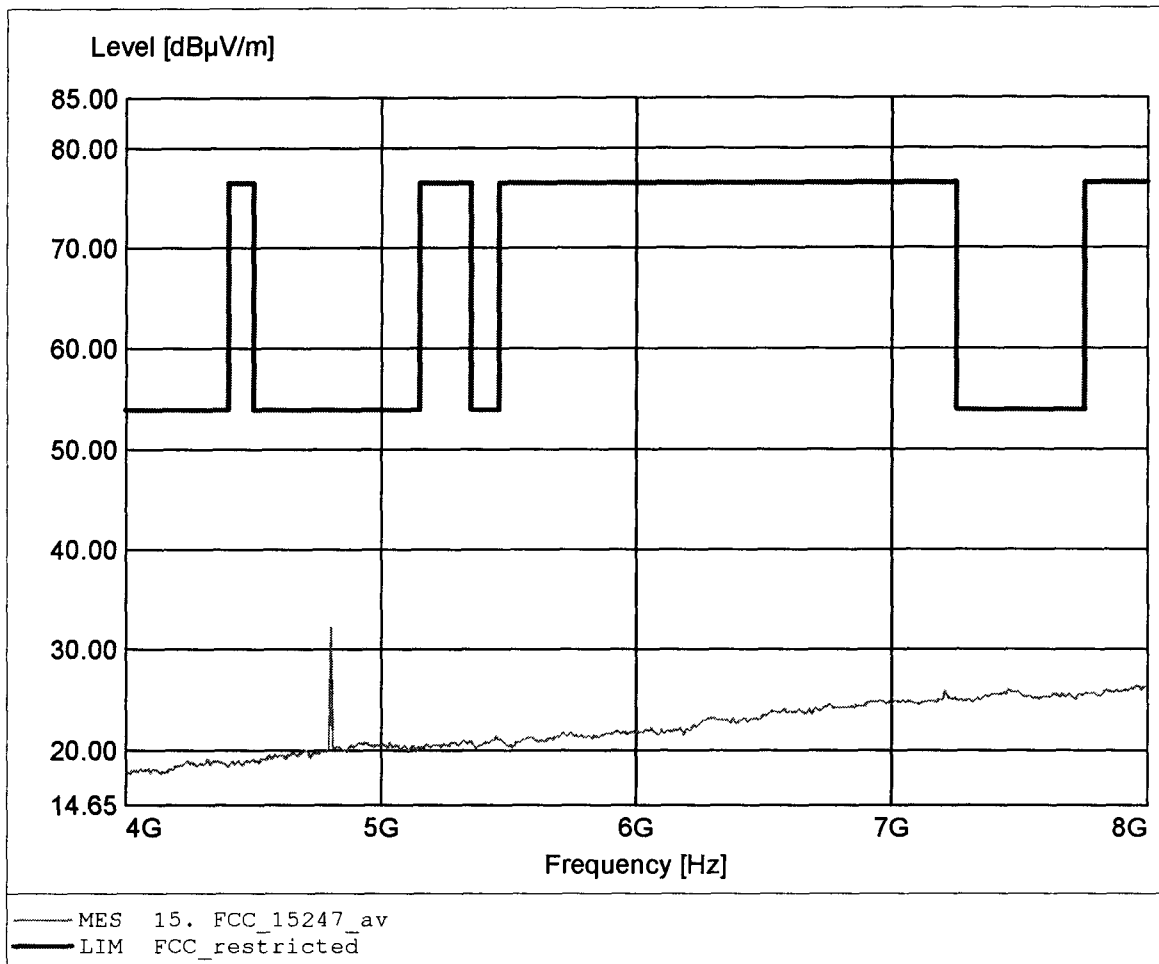

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.511GHz, Emax: 41.41dBµV/m, RBW: 1MHz

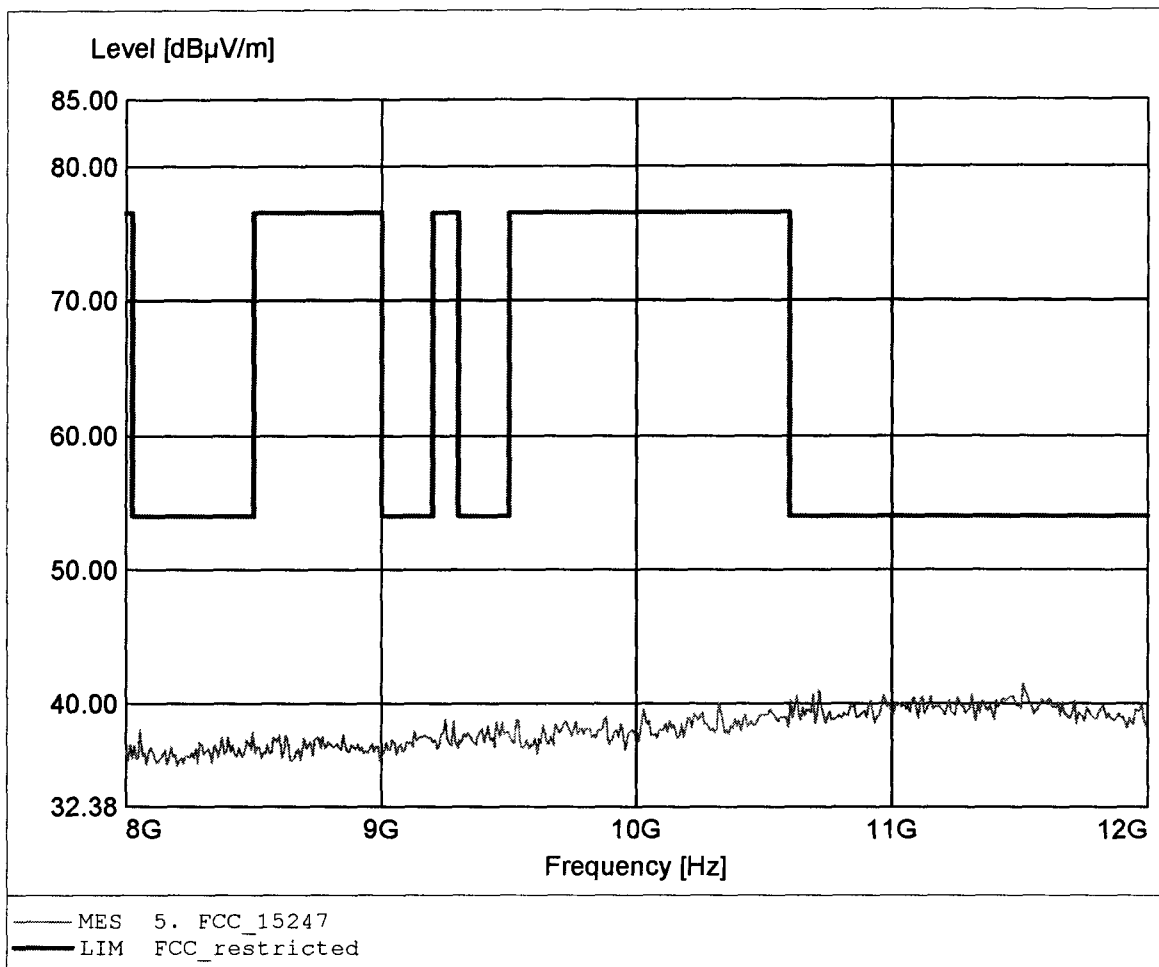

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.206GHz, Emax: 41.20dBµV/m, RBW: 1MHz

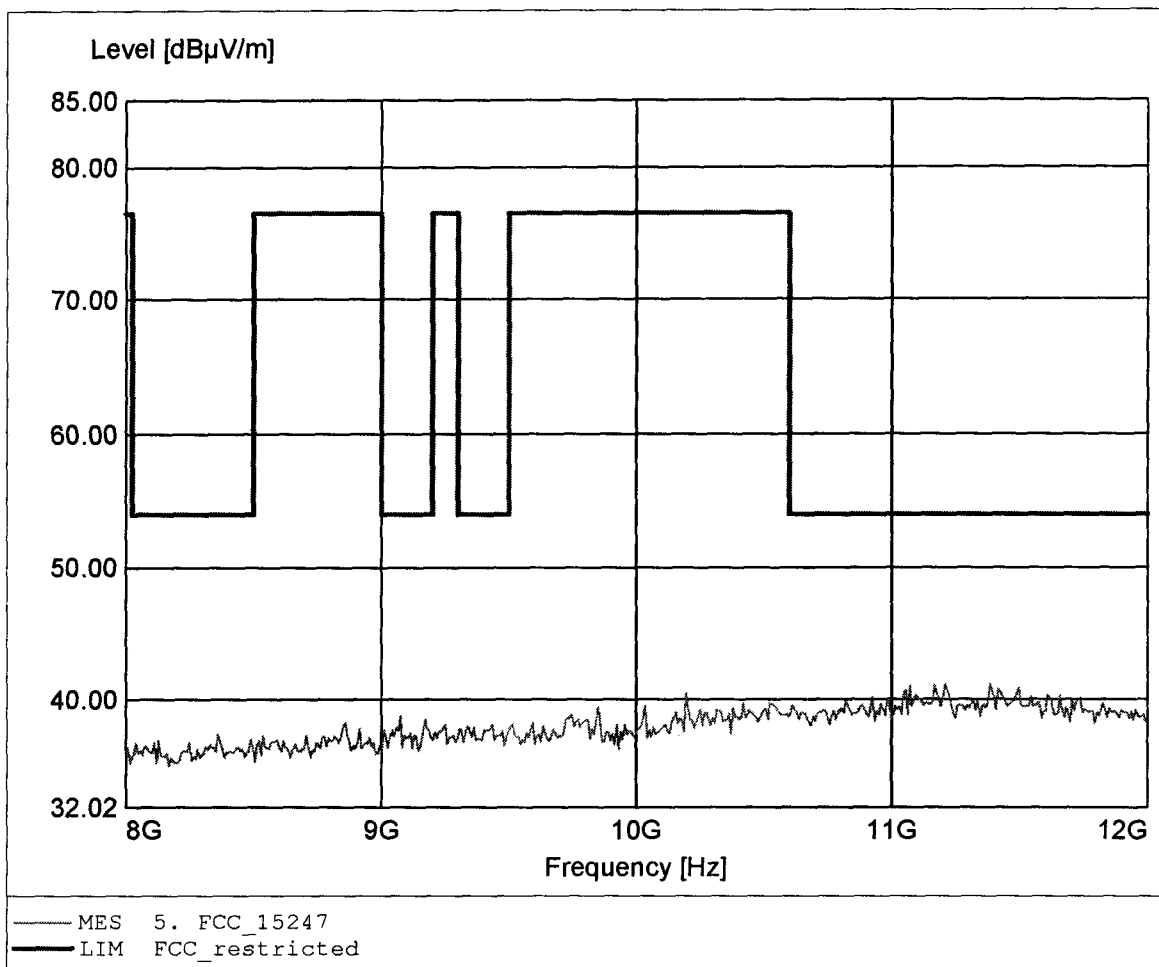

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.515GHz, Emax: 44.50dBµV/m, RBW: 1MHz

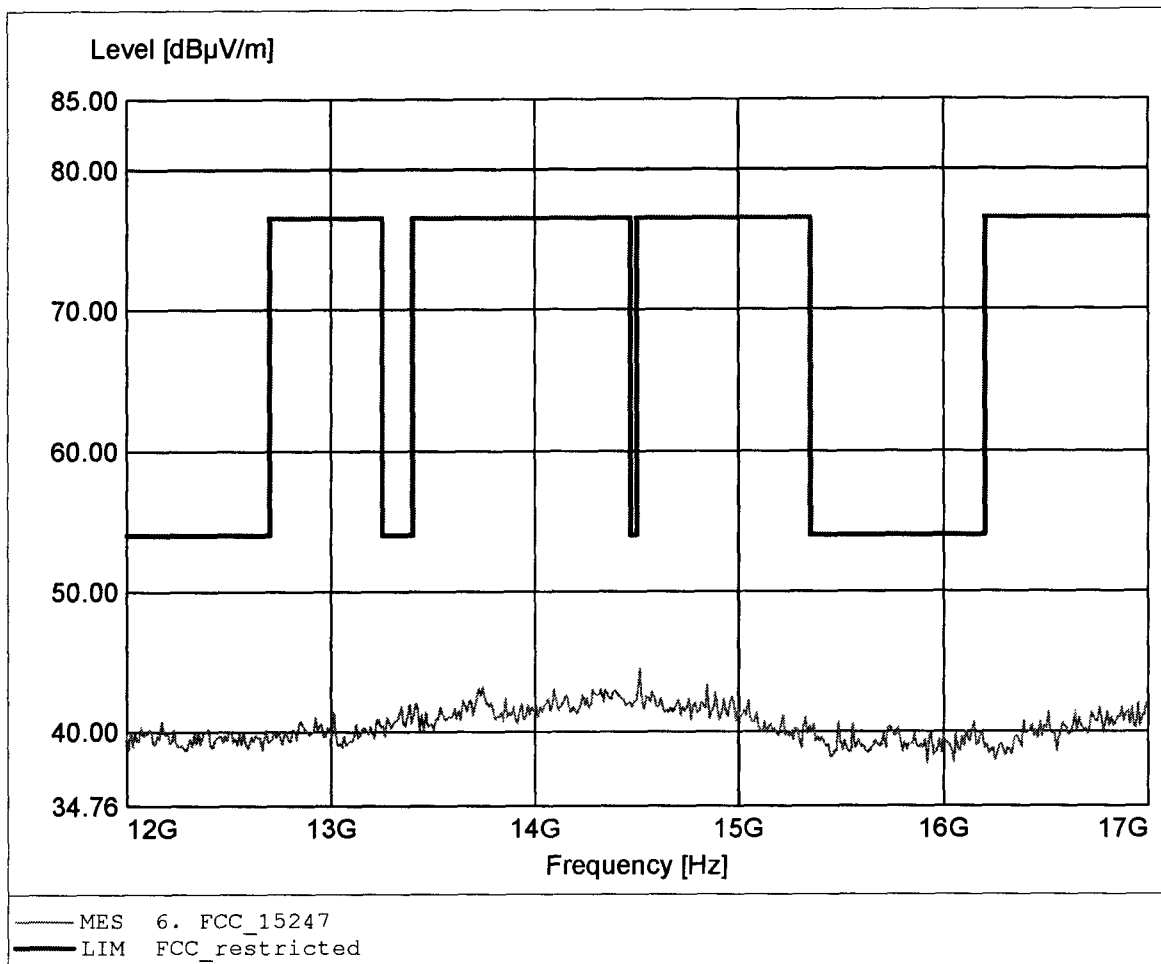

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.555GHz, Emax: 43.50dBµV/m, RBW: 1MHz

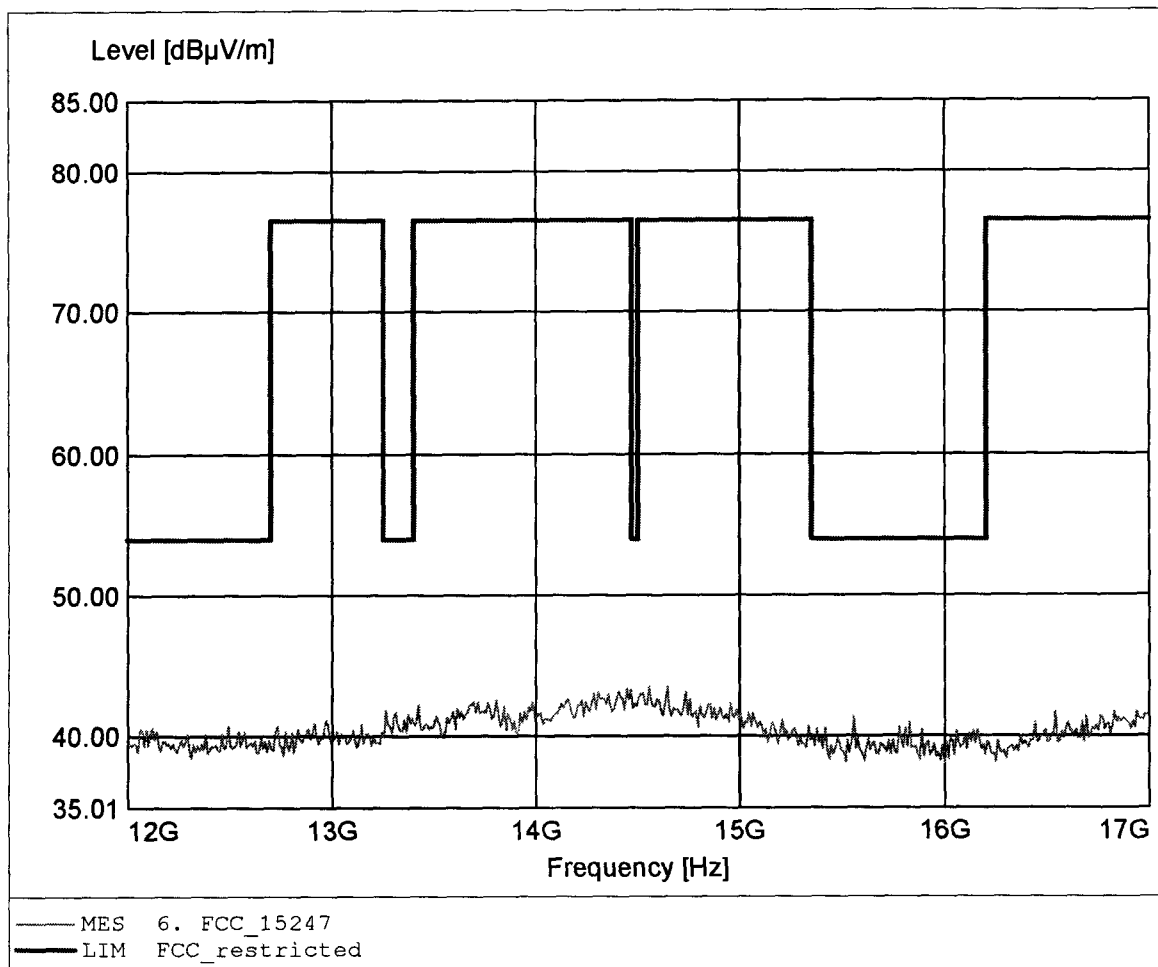

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 44.36dBµV/m, RBW: 1MHz

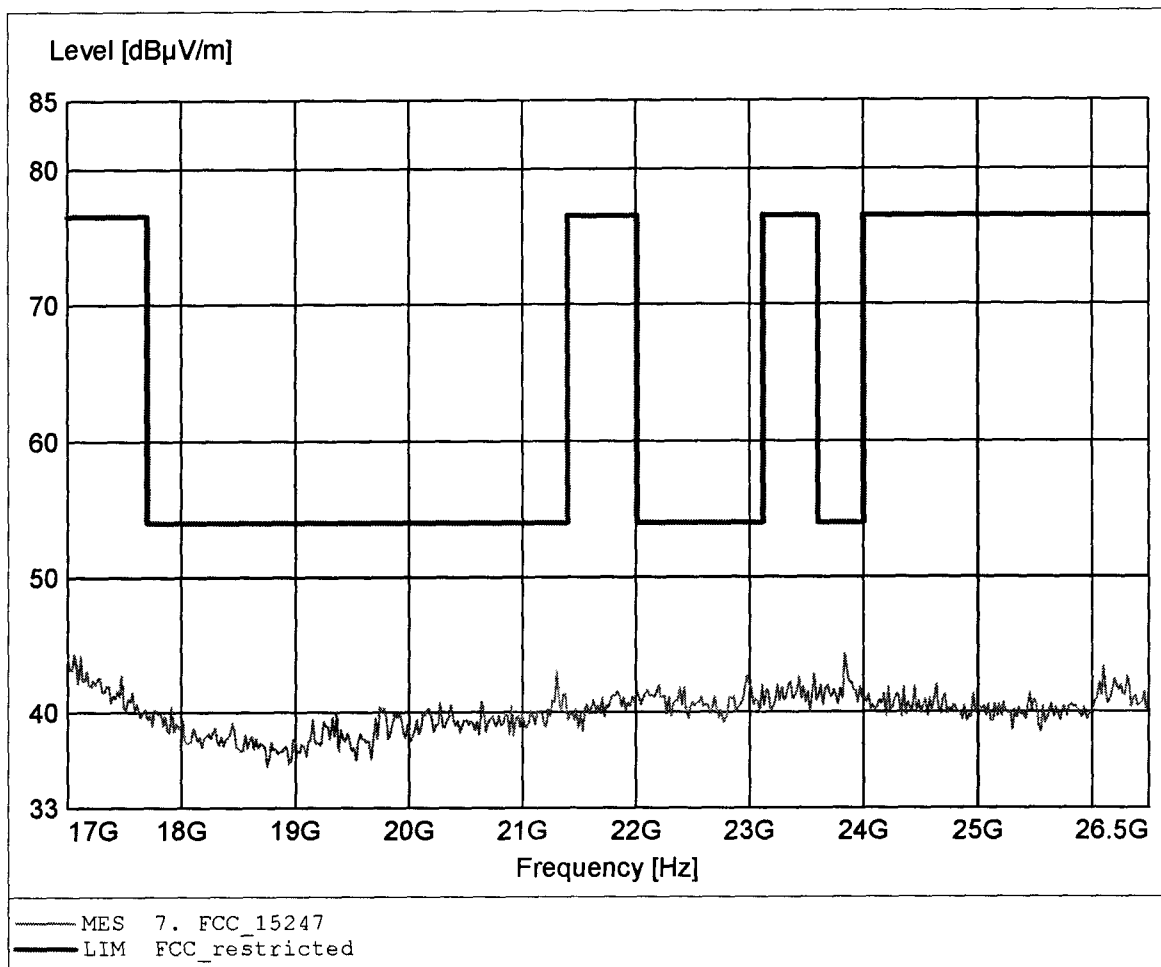

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 44.46dBµV/m, RBW: 1MHz

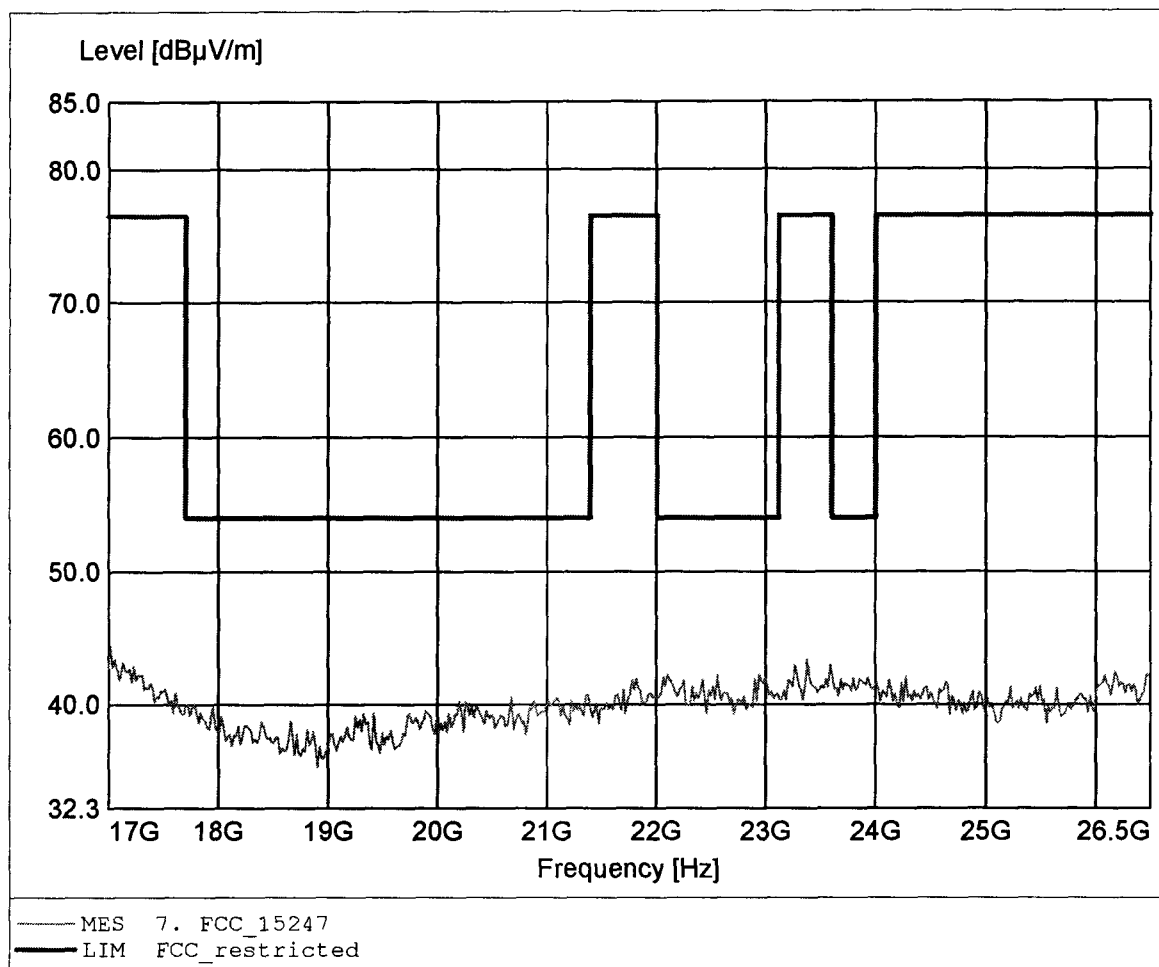

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.934MHz, Emax: 32.28dBµV/m, RBW: 100kHz

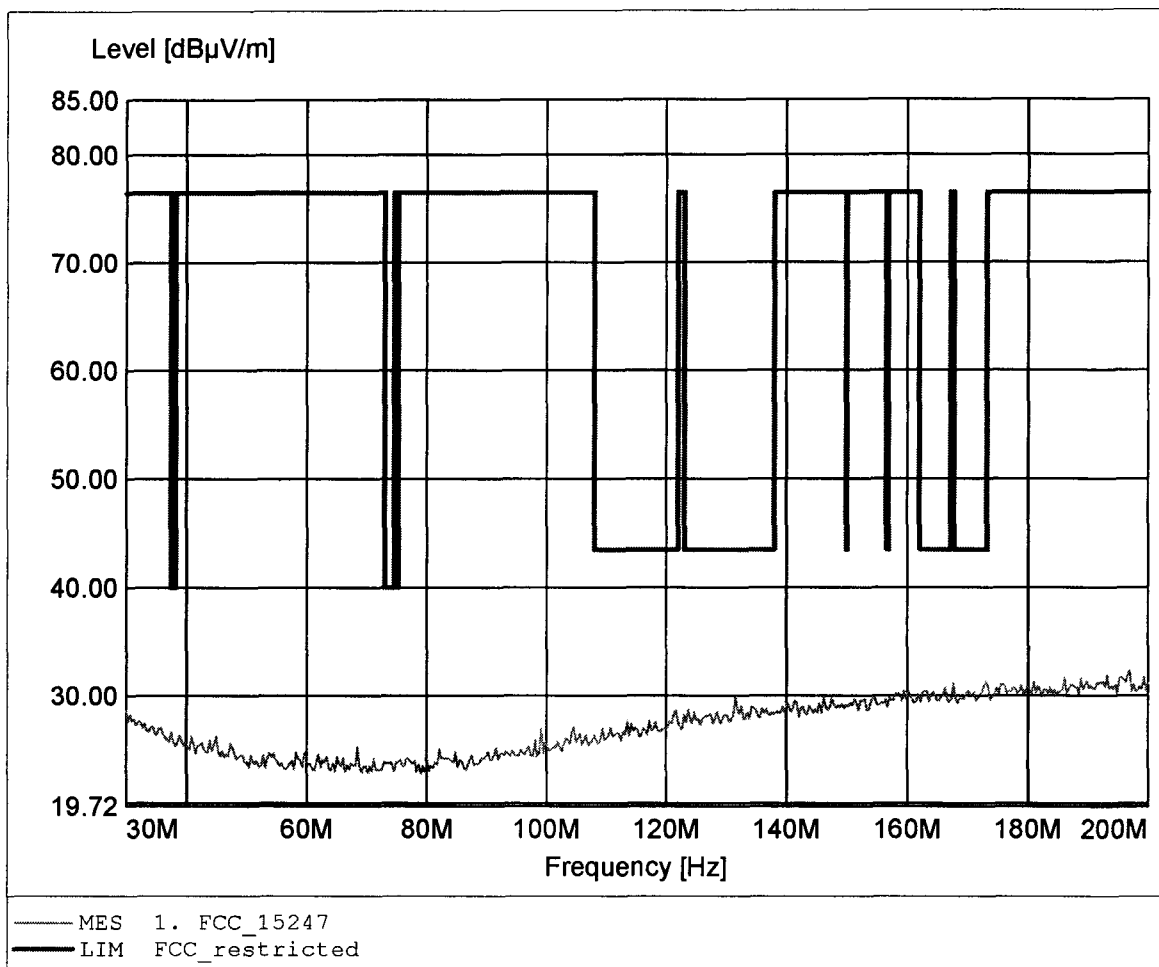

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.571MHz, Emax: 31.90dBµV/m, RBW: 100kHz

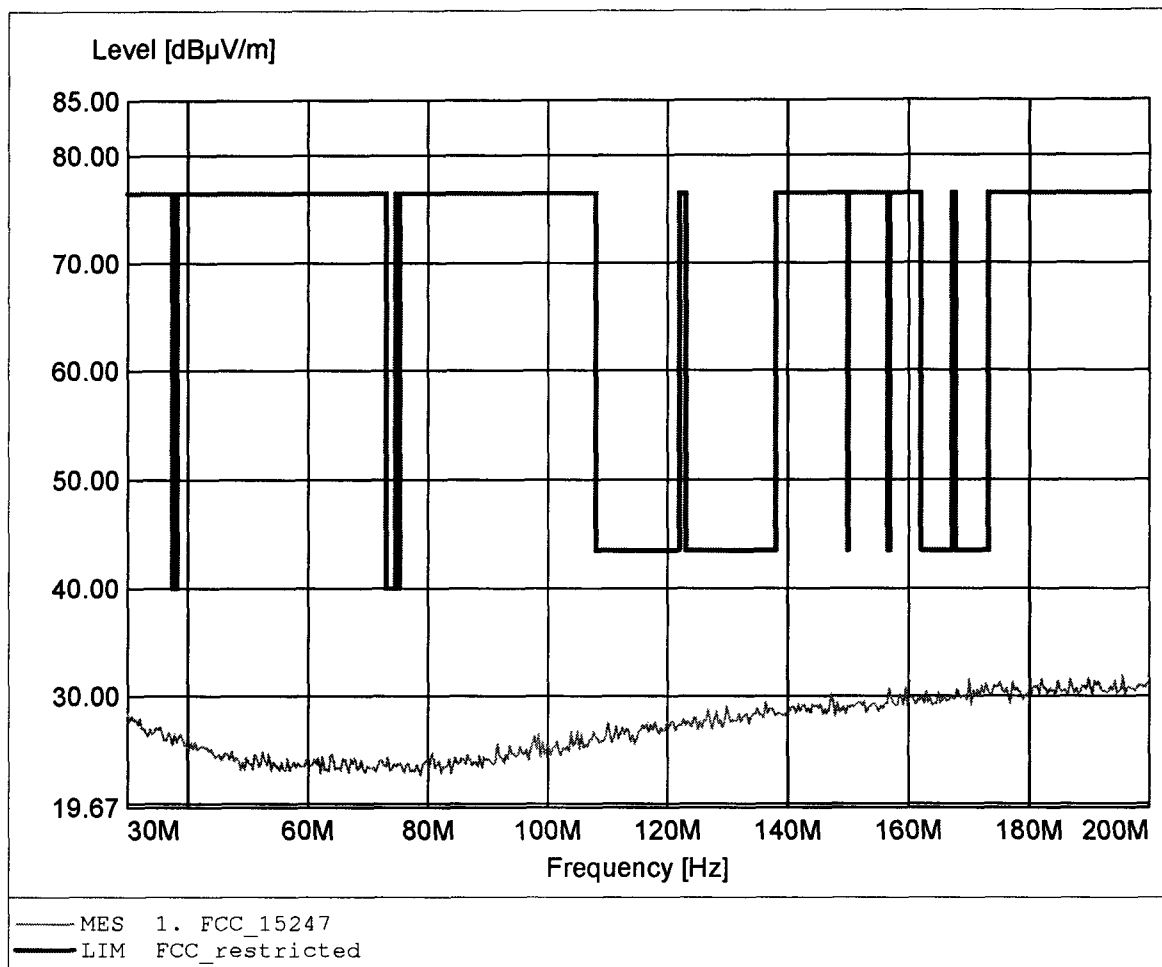

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 996.794MHz, Emax: 20.26dBµV/m, RBW: 100kHz

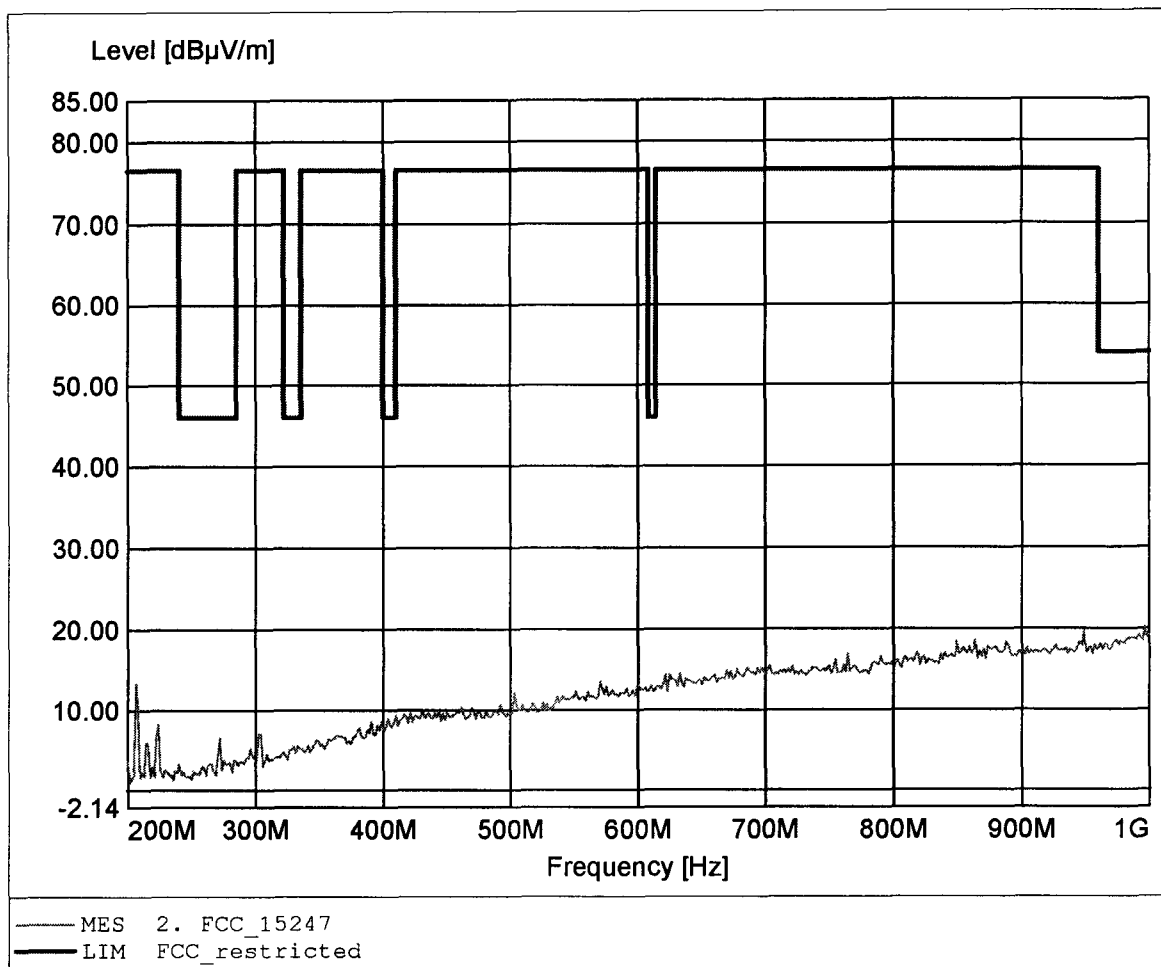

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 987.174MHz, Emax: 19.57dBµV/m, RBW: 100kHz

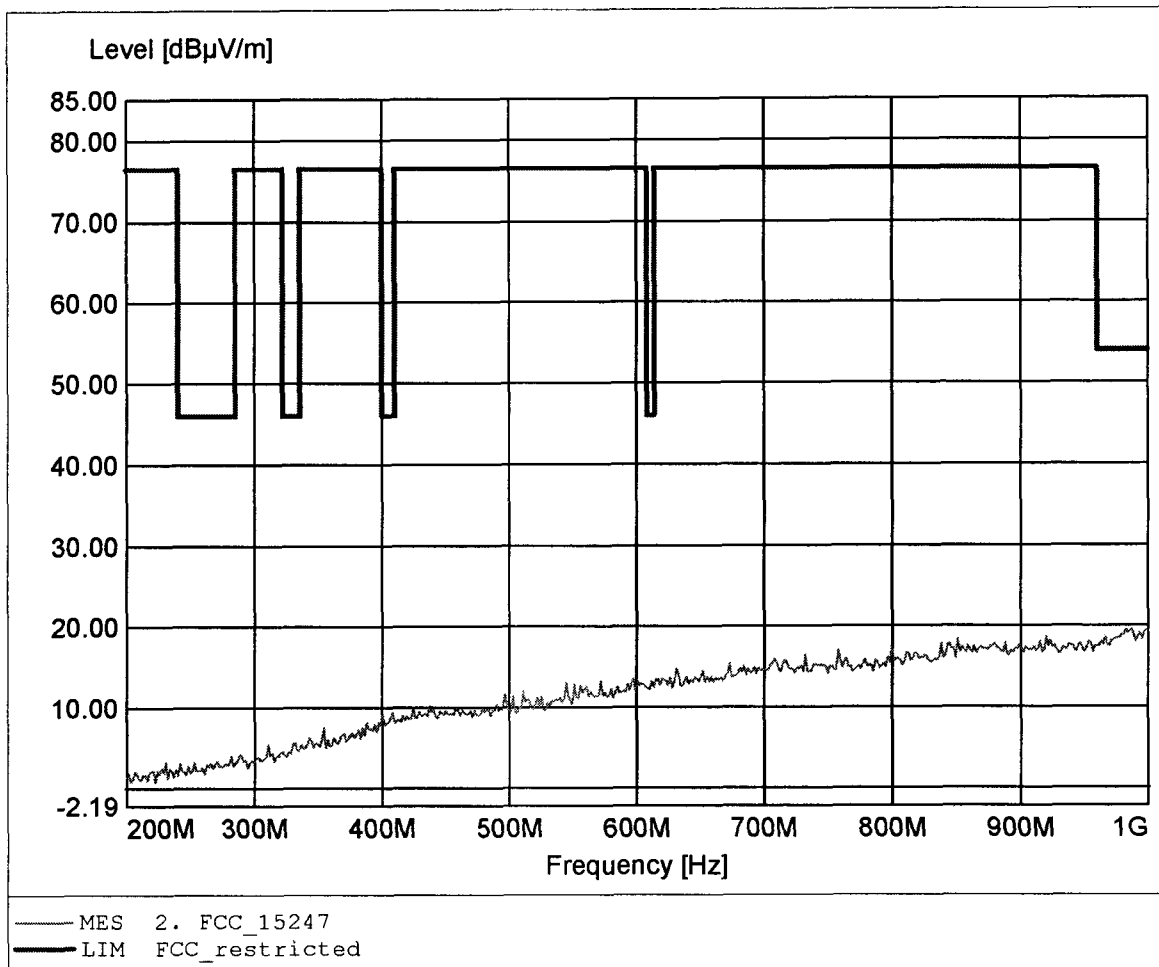

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.628GHz, Emax: 43.80dBpV/m, REW: 1MHz

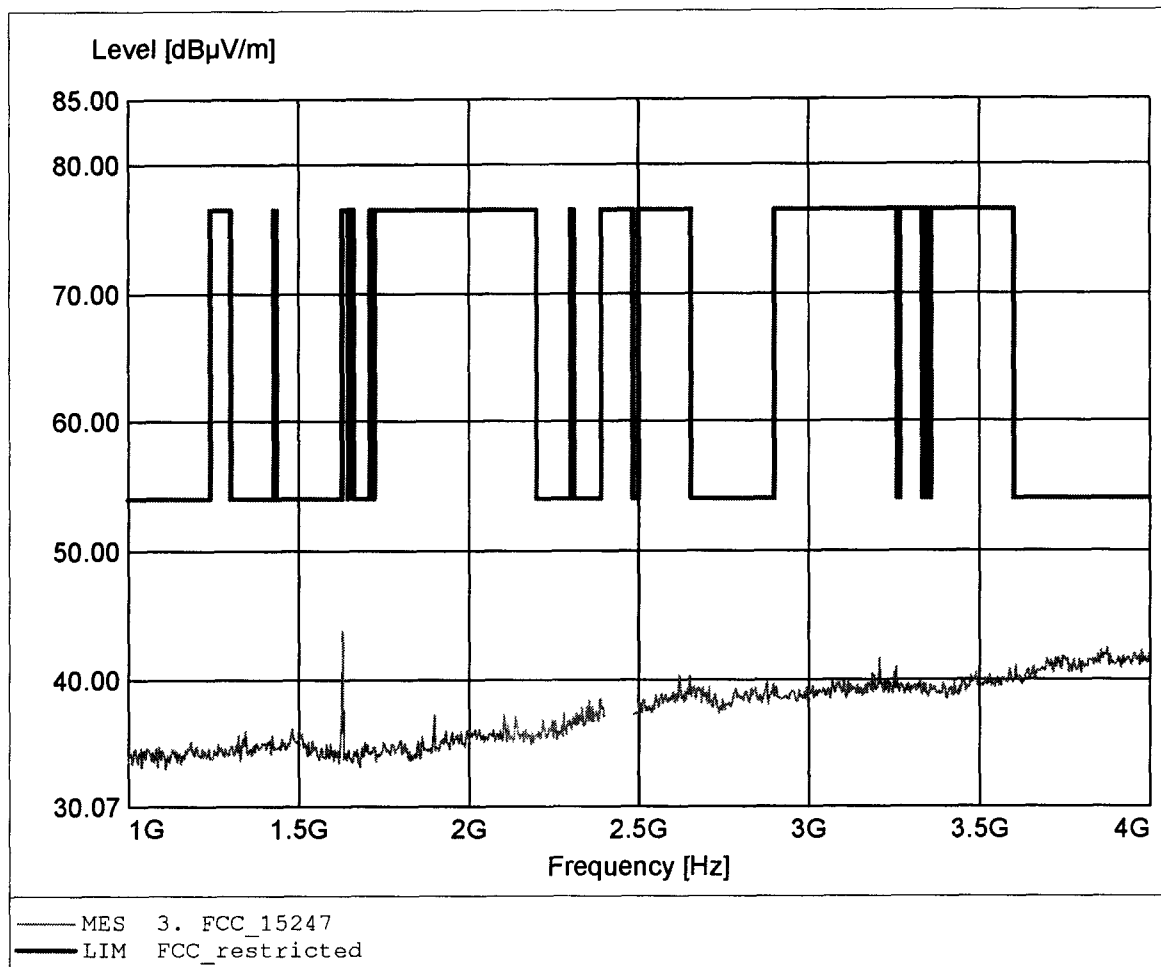

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.628GHz, Emax: 43.10dBμV/m, RBW: 1MHz

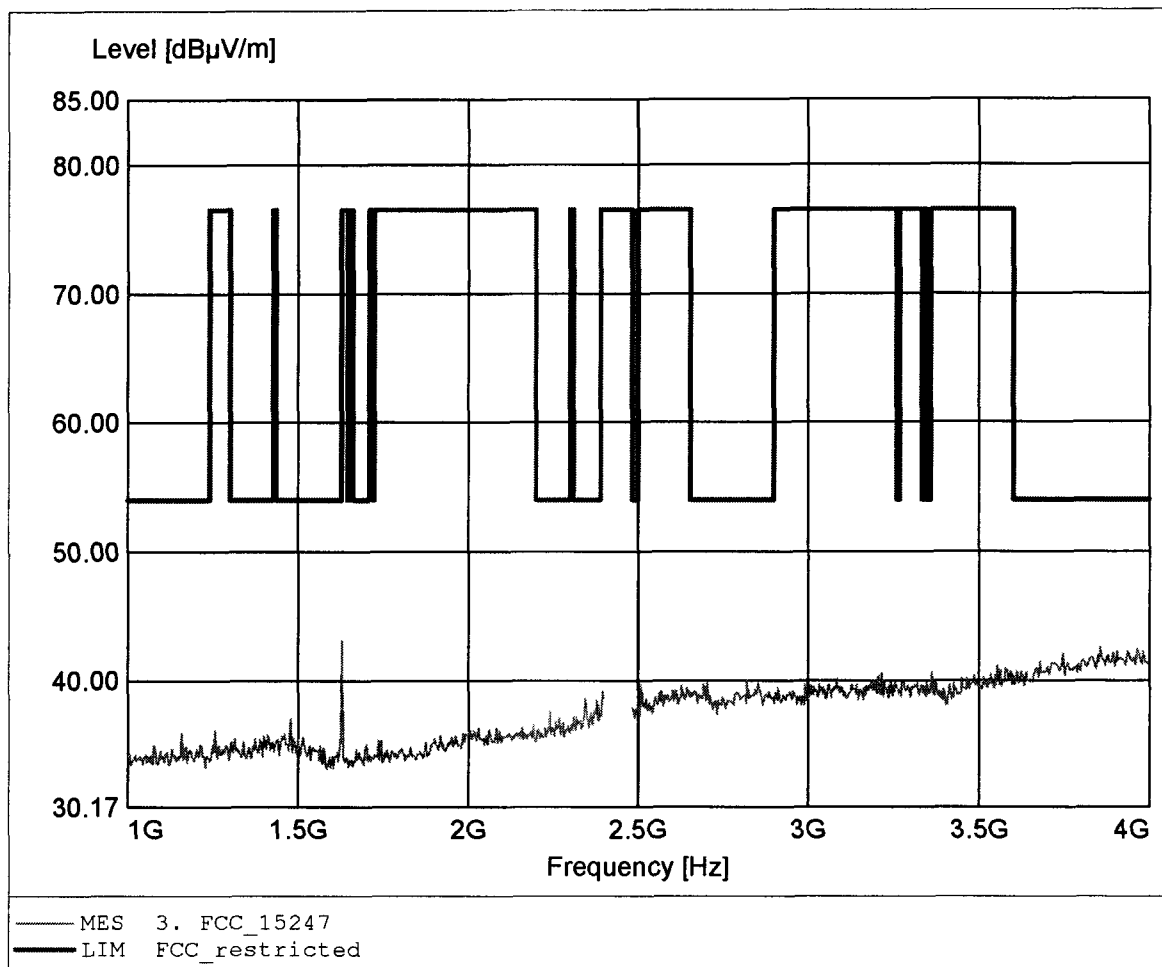

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 44.96dBμV/m, RBW: 1MHz

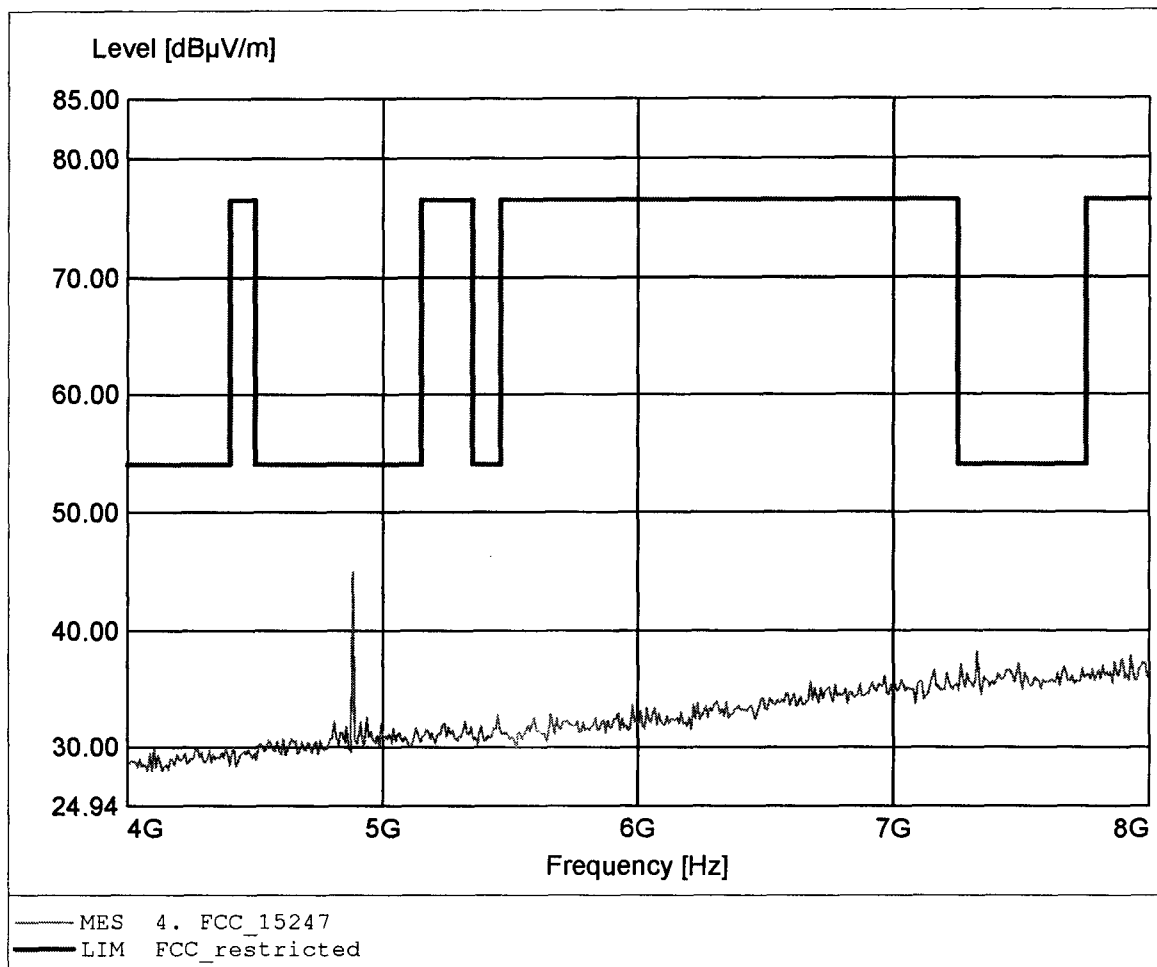

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 51.84dBμV/m, RBW: 1MHz

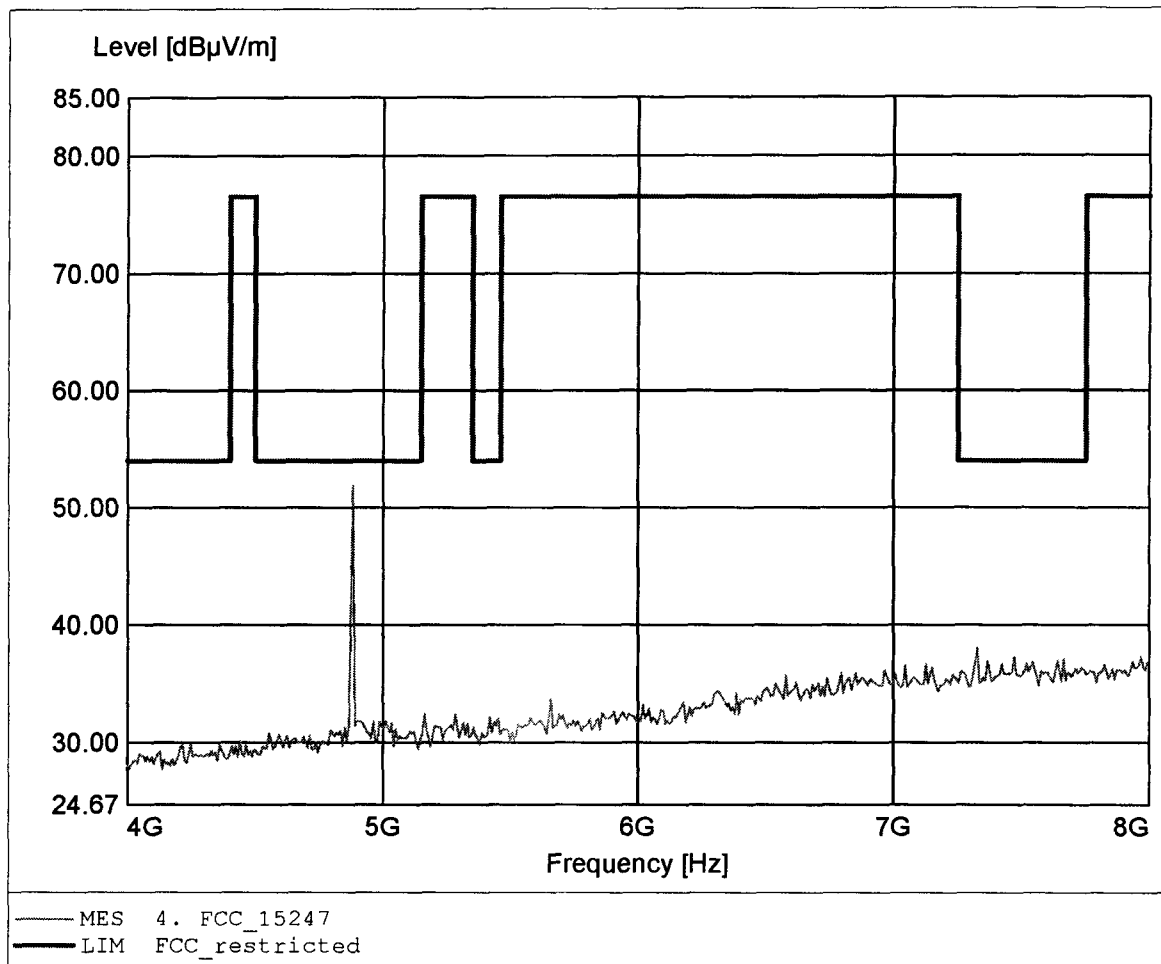

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.495GHz, Emax: 40.83dBμV/m, RBW: 1MHz

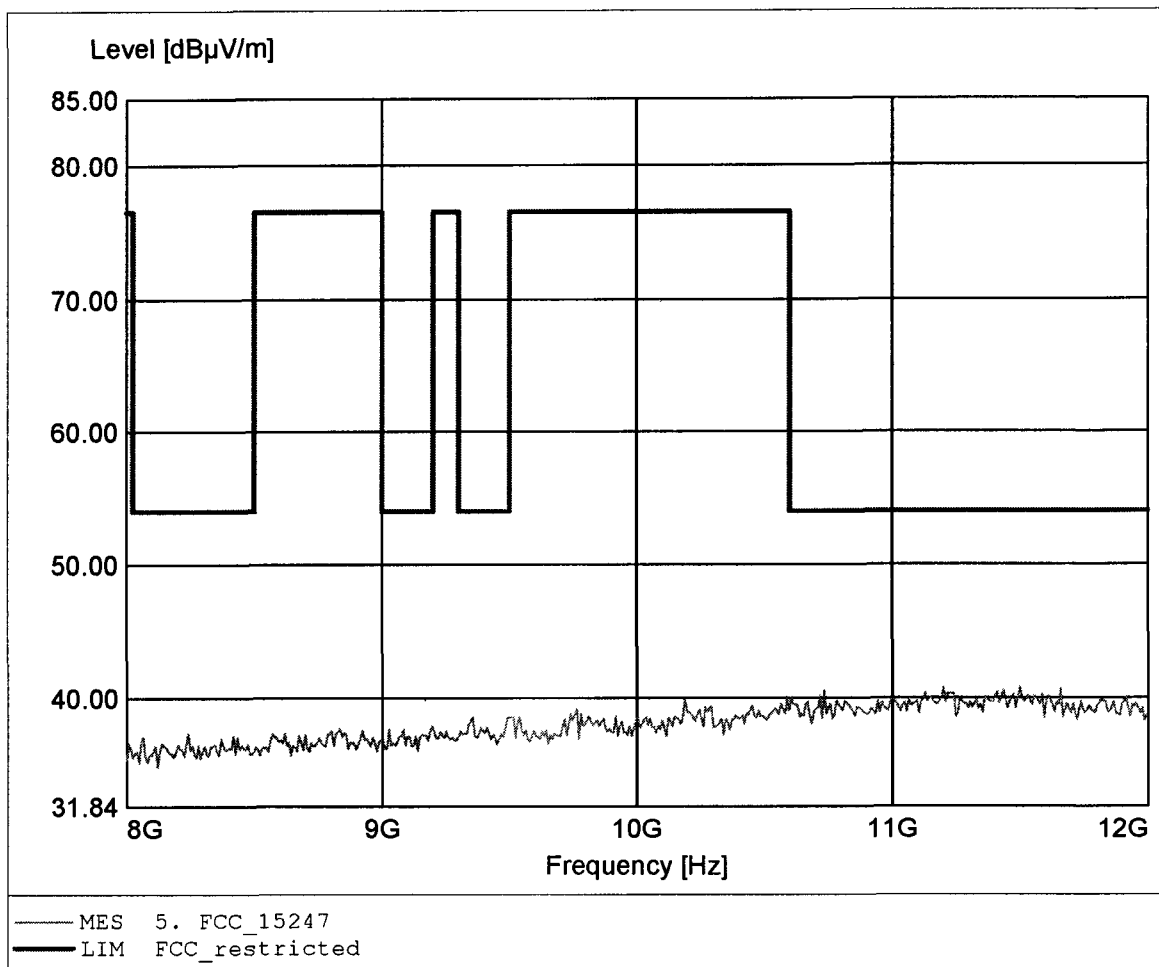

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.471GHz, Emax: 41.16dBμV/m, RBW: 1MHz

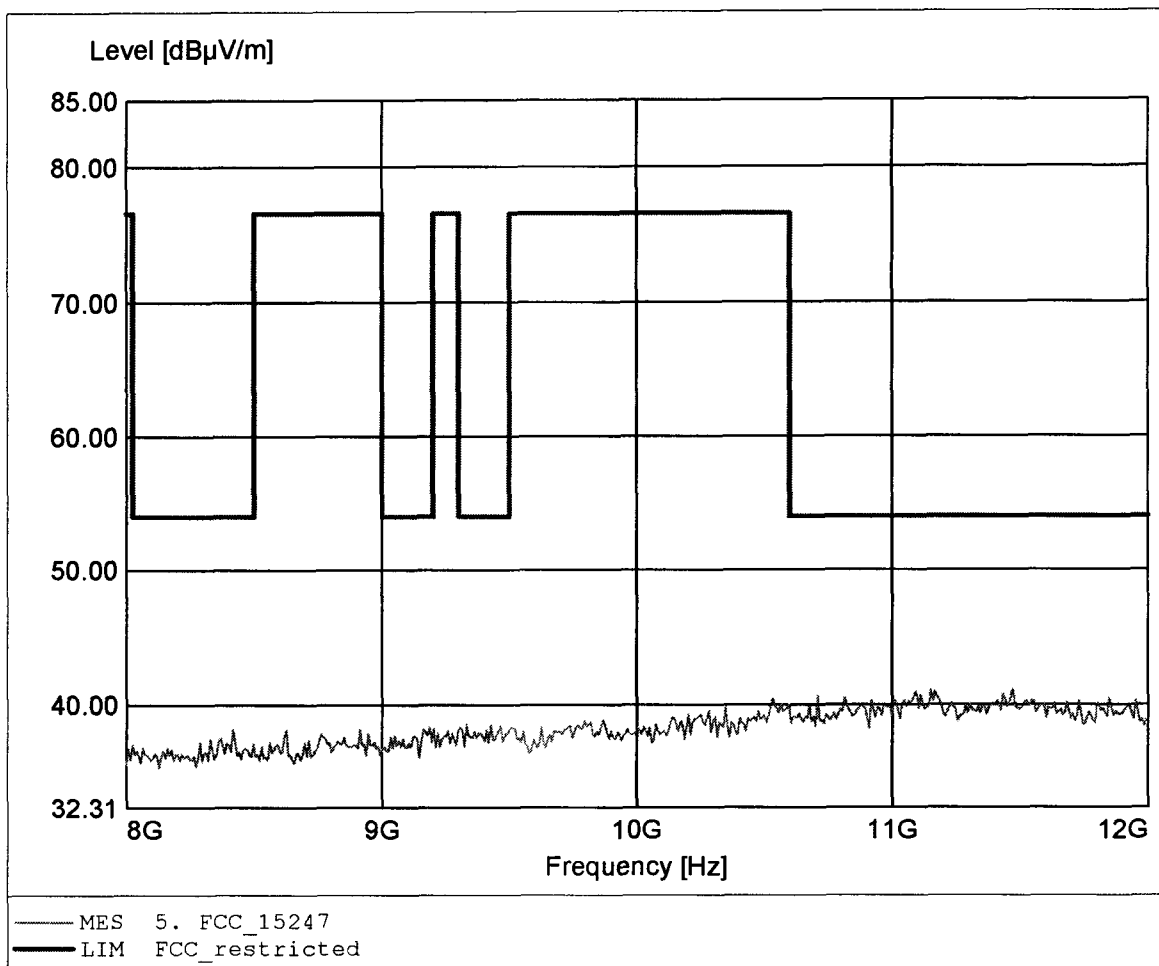

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.305GHz, Emax: 43.82dBuV/m, RBW: 1MHz

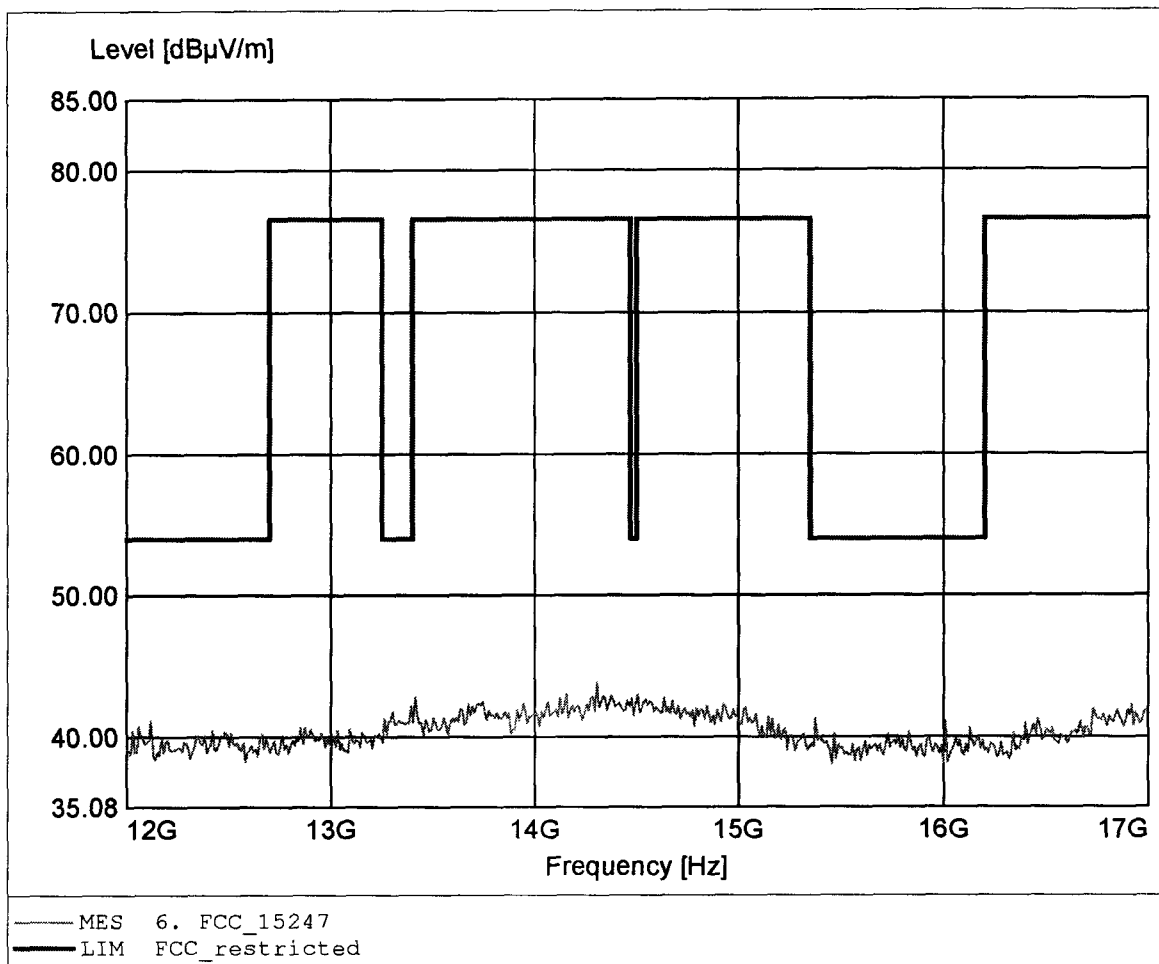

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.144GHz, Emax: 43.25dBµV/m, RBW: 1MHz

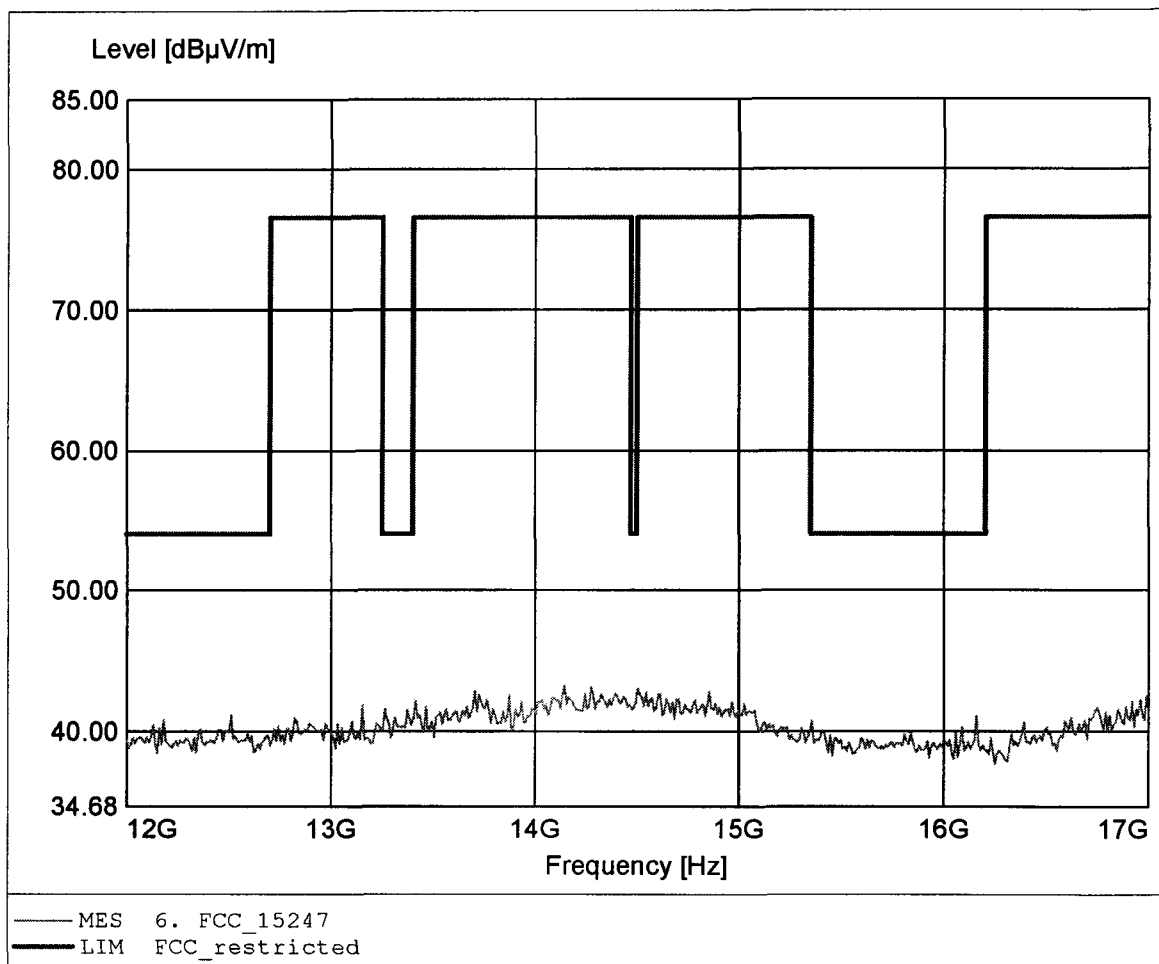

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 44.23dBuV/m, RBW: 1MHz

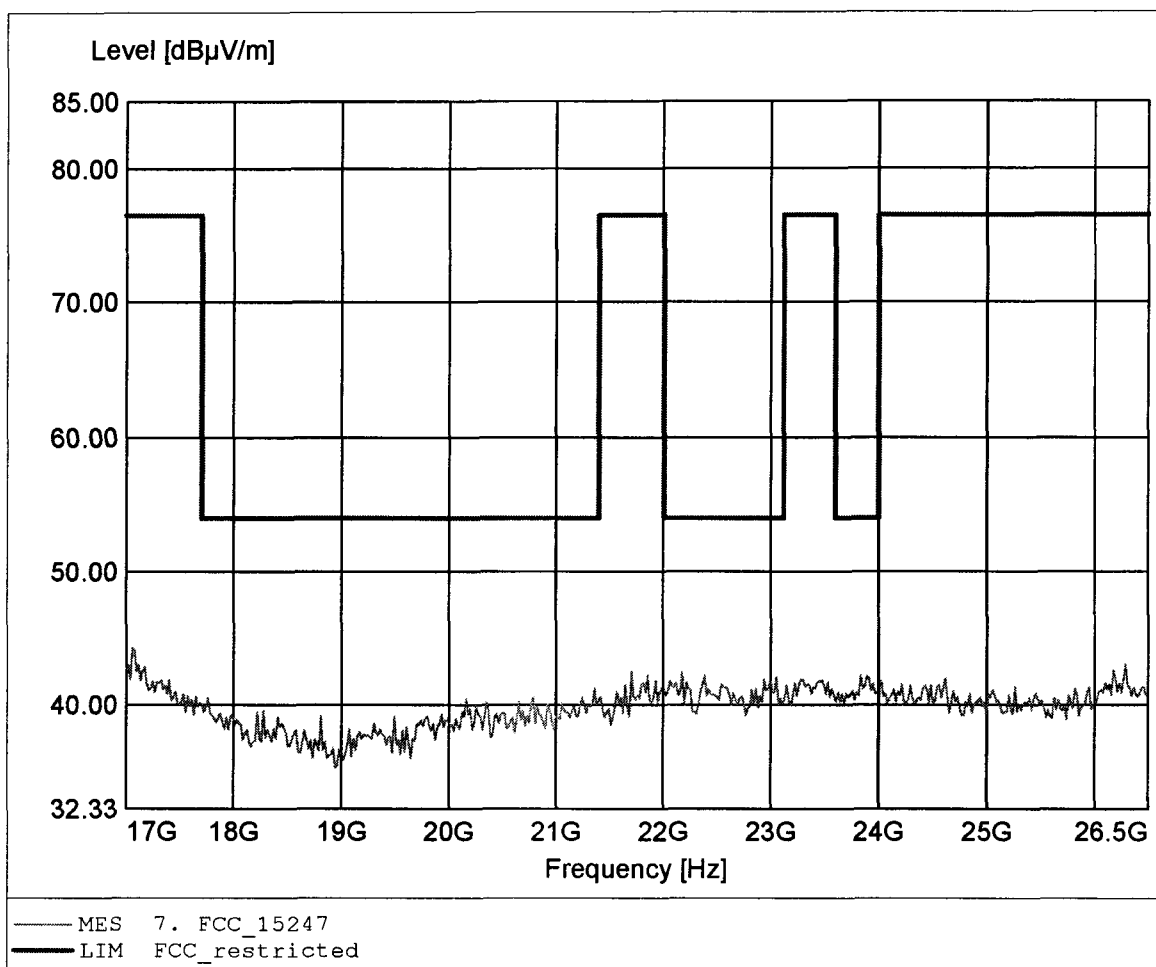

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.228GHz, Emax: 44.21dBuV/m, RBW: 1MHz

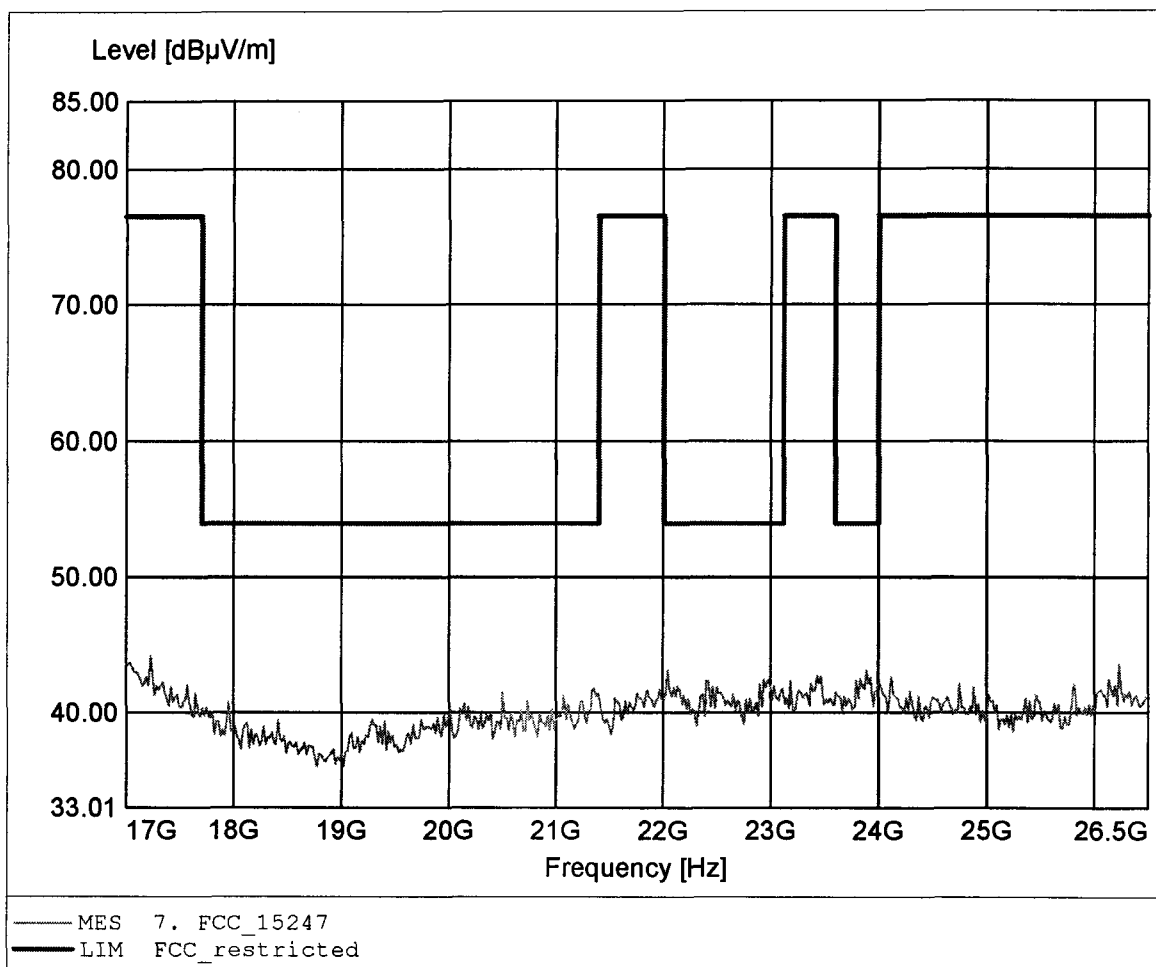

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 189.098MHz, Emax: 32.73dBμV/m, RBW: 100kHz

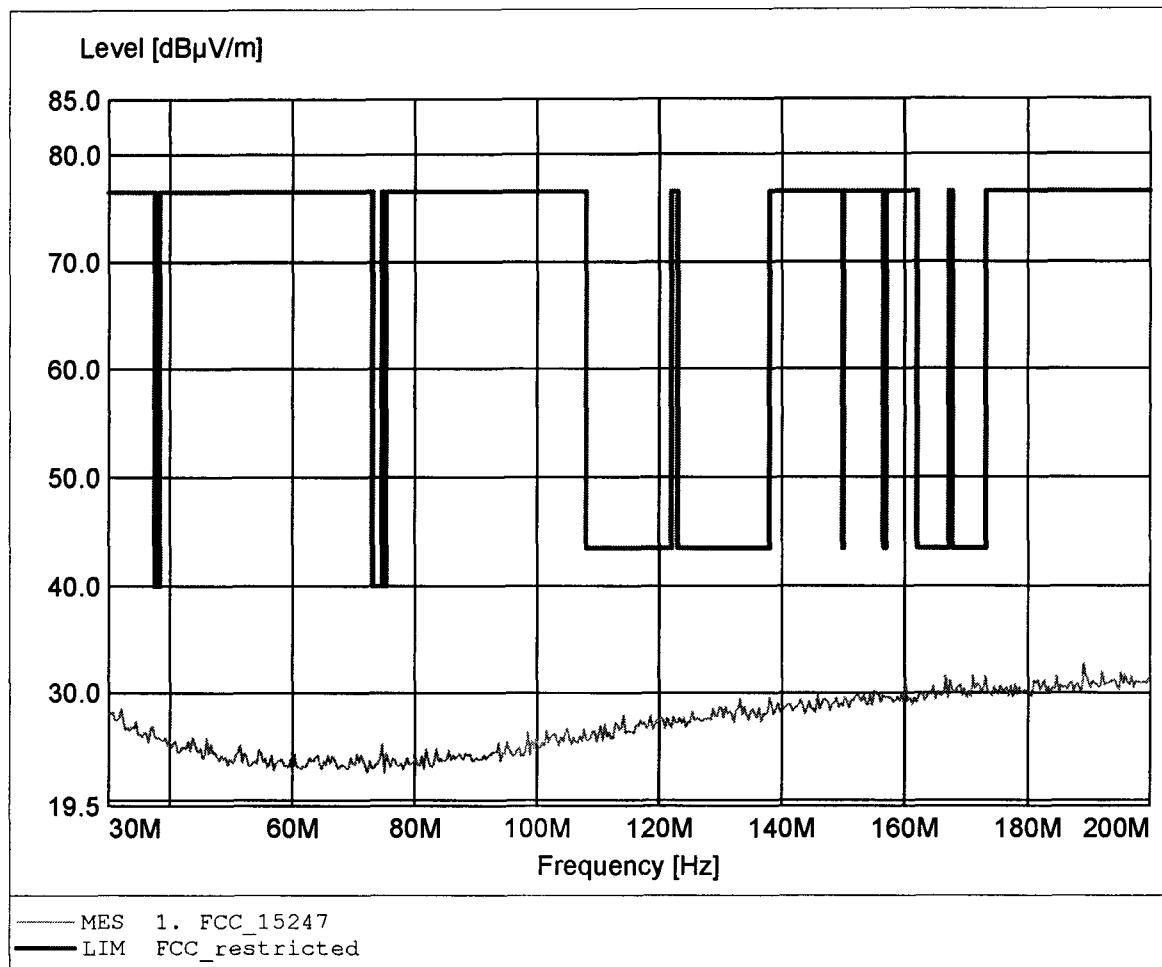

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 190.461MHz, Emax: 31.98dBµV/m, RBW: 100kHz

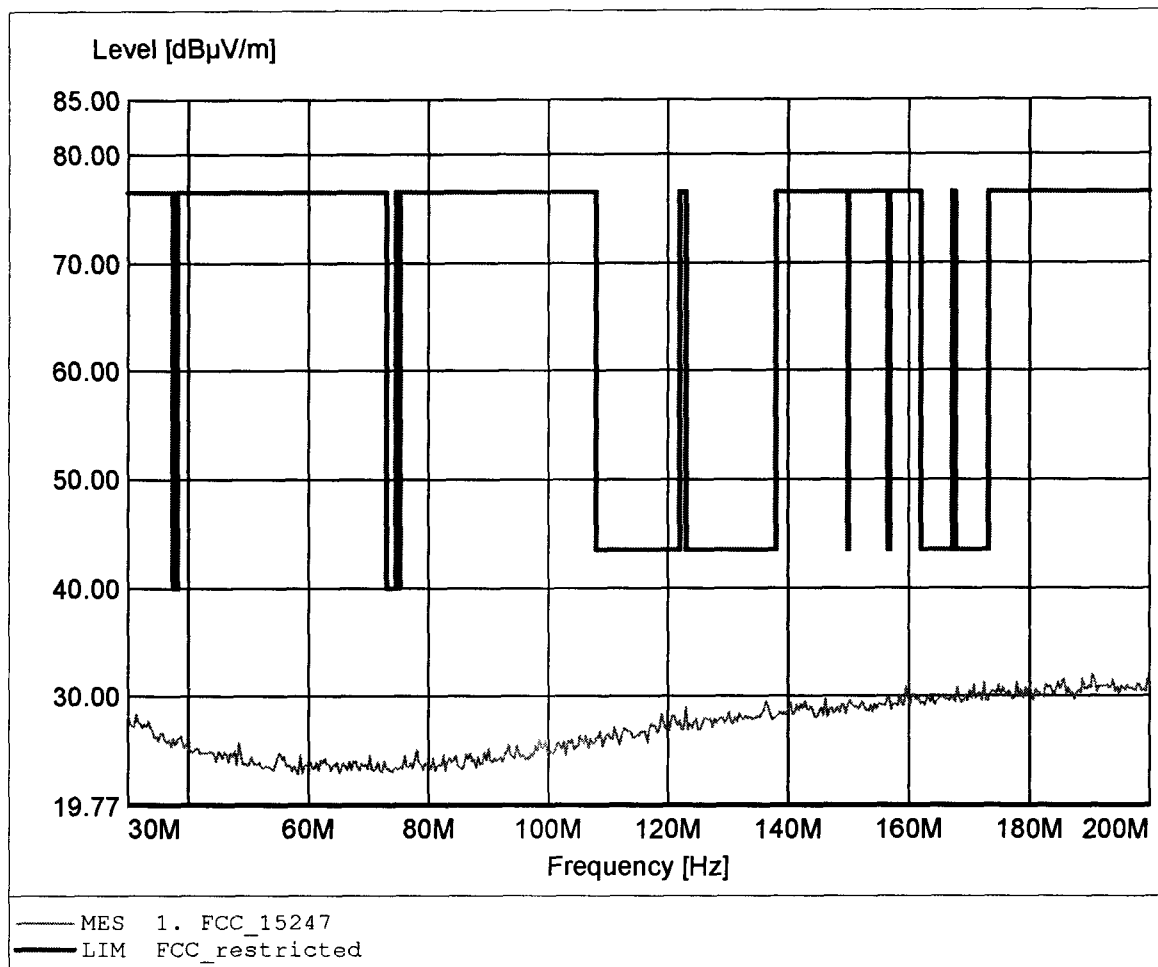

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 988.778MHz, Emax: 20.68dBuV/m, RBW: 100kHz

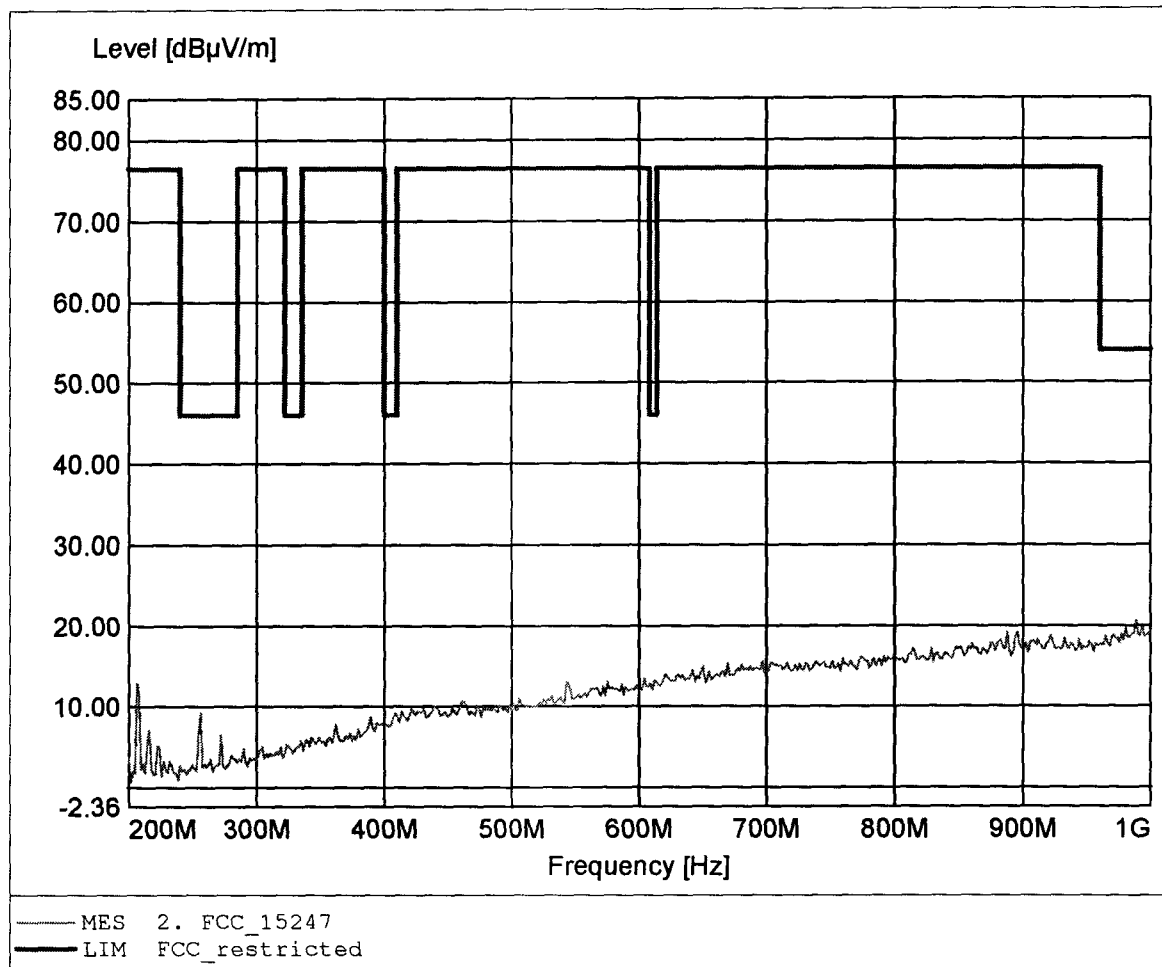

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 987.174MHz, Emax: 19.56dB μ V/m, RBW: 100kHz

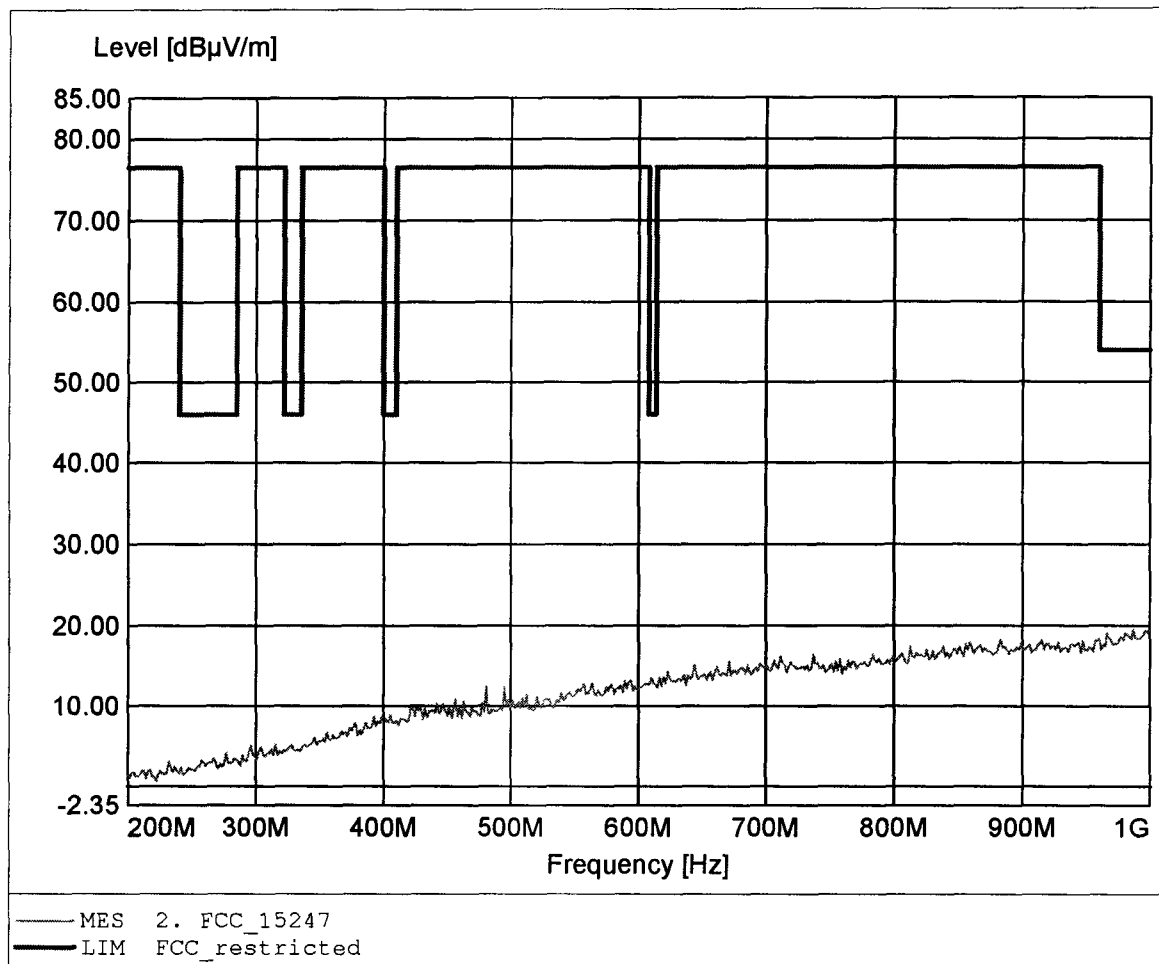

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.654GHz, Emax: 43.10dBμV/m, RBW: 1MHz

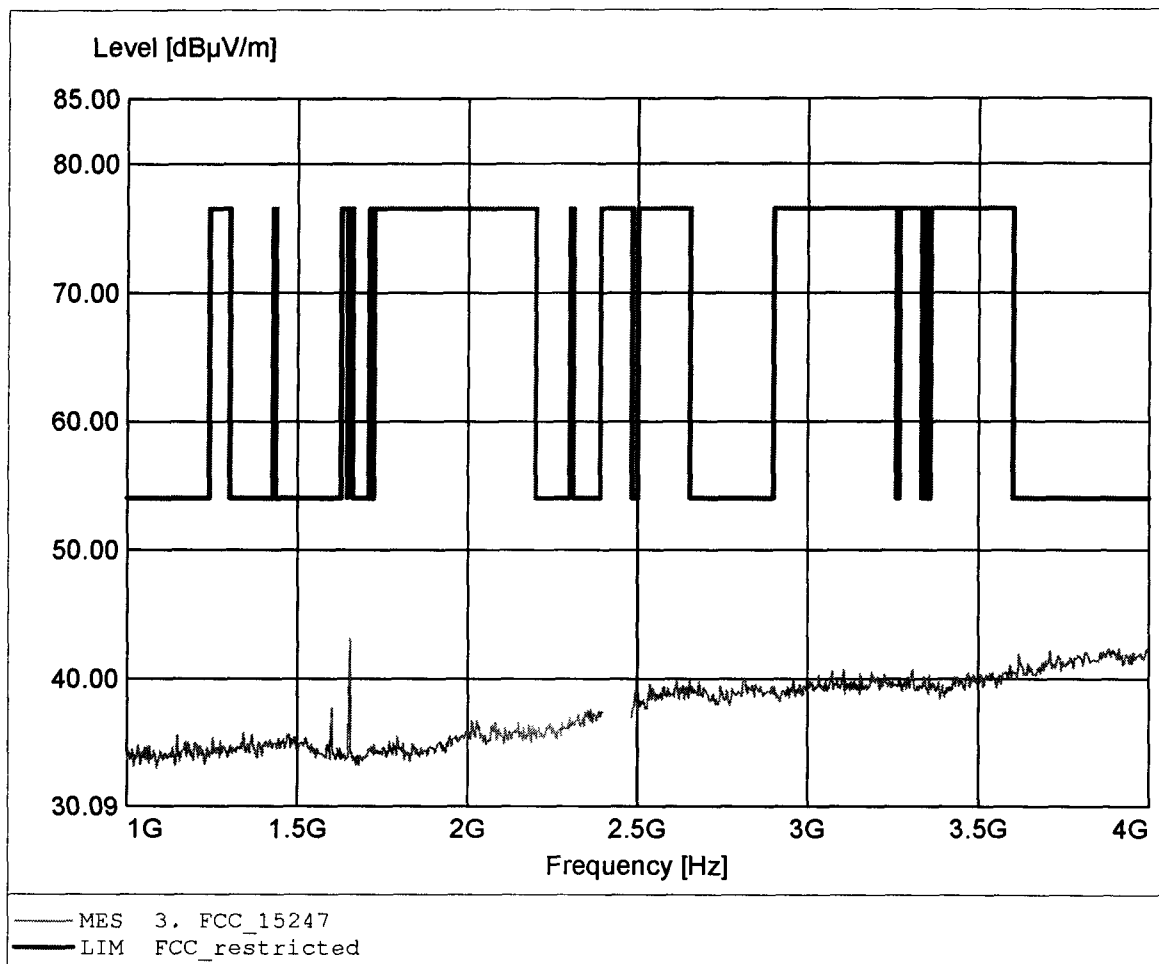

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.909GHz, Emax: 42.74dBμV/m, RBW: 1MHz

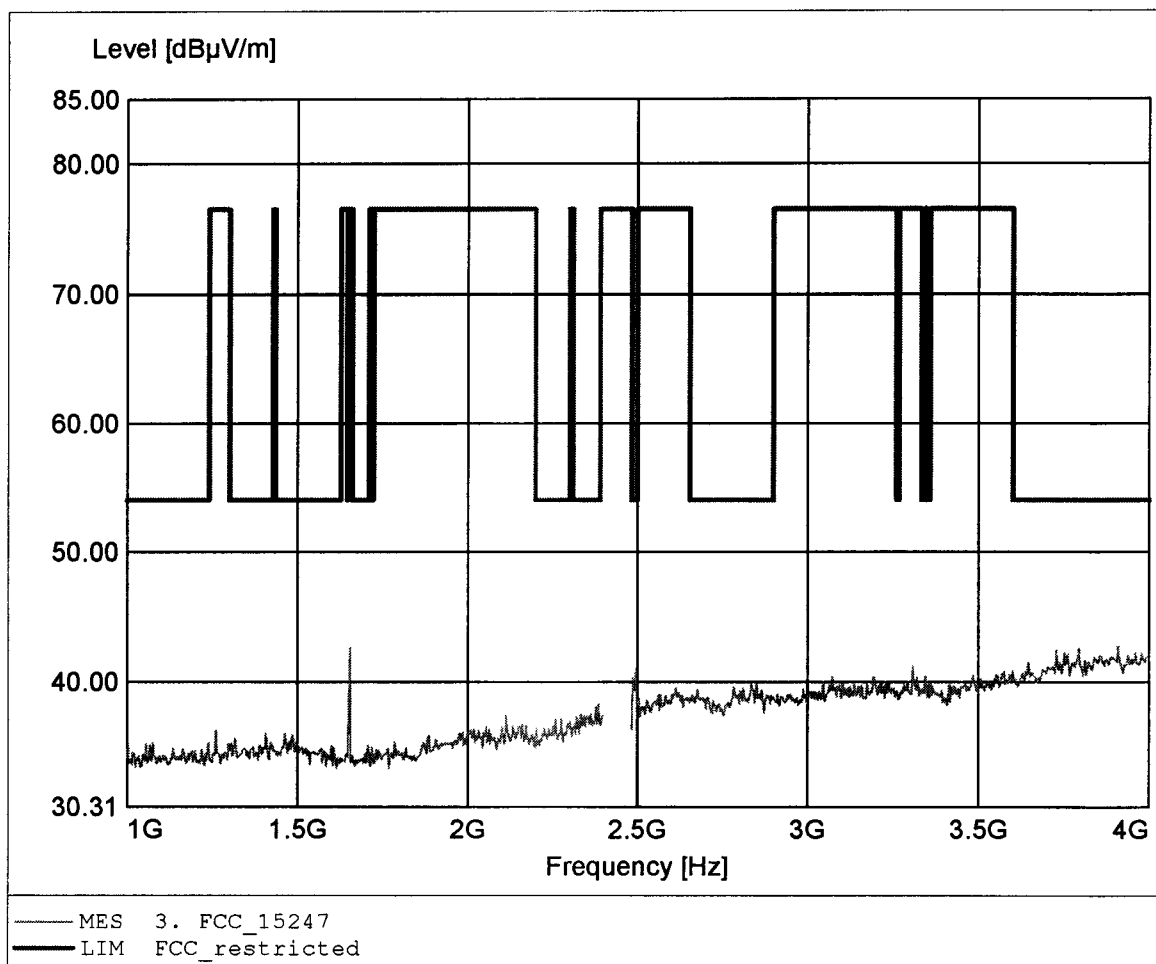

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 43.49dBµV/m, RBW: 1MHz

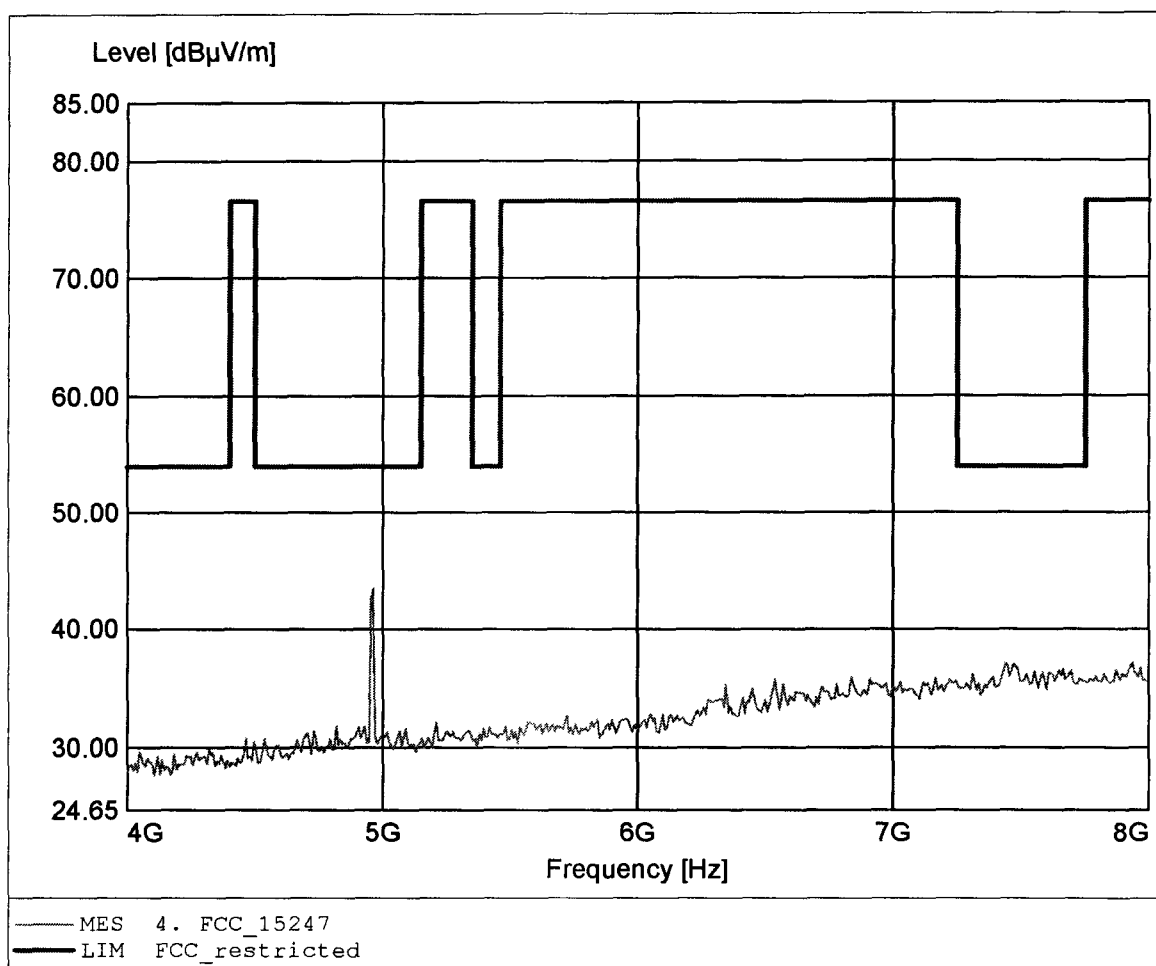

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 47.31dBµV/m, REW: 1MHz

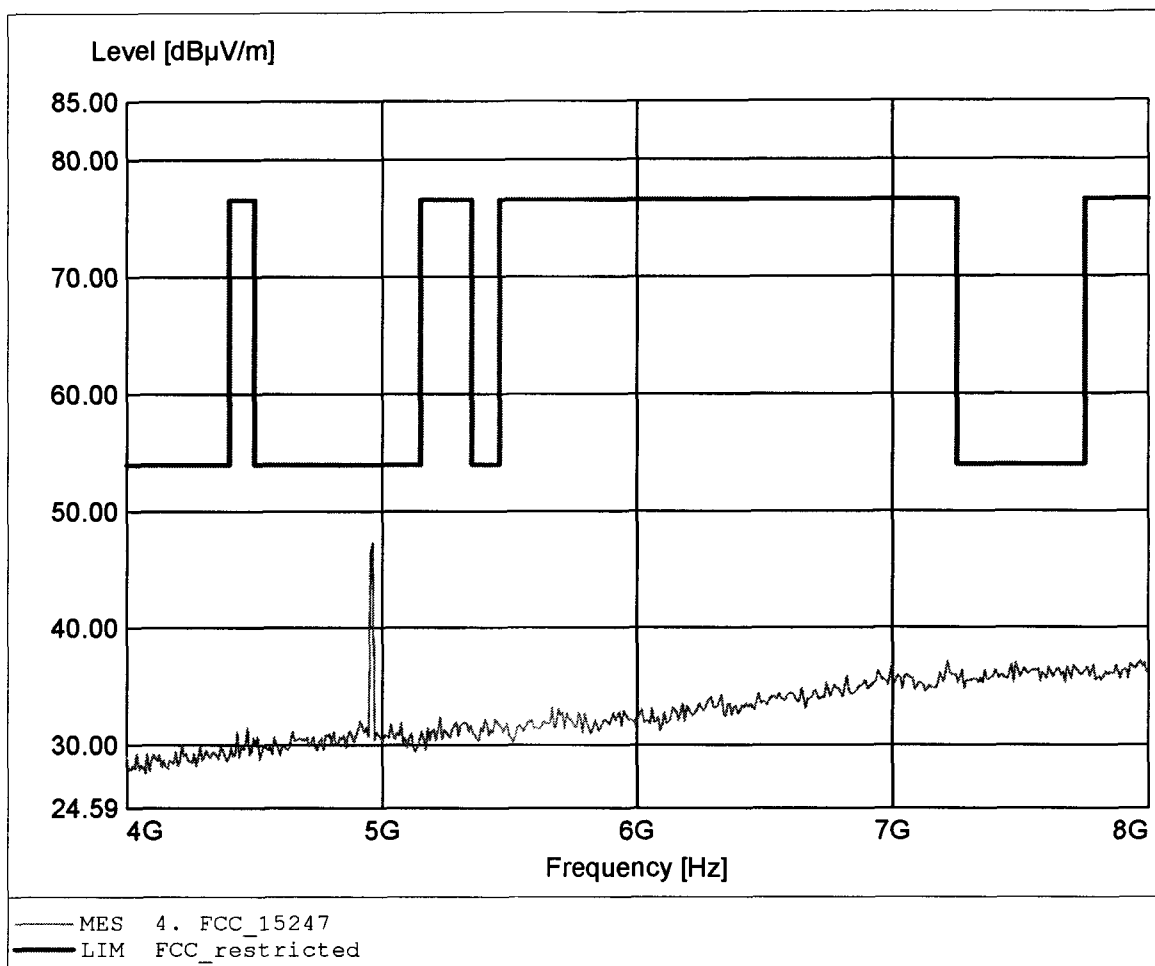

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.062GHz, Emax: 41.27dBμV/m, RBW: 1MHz

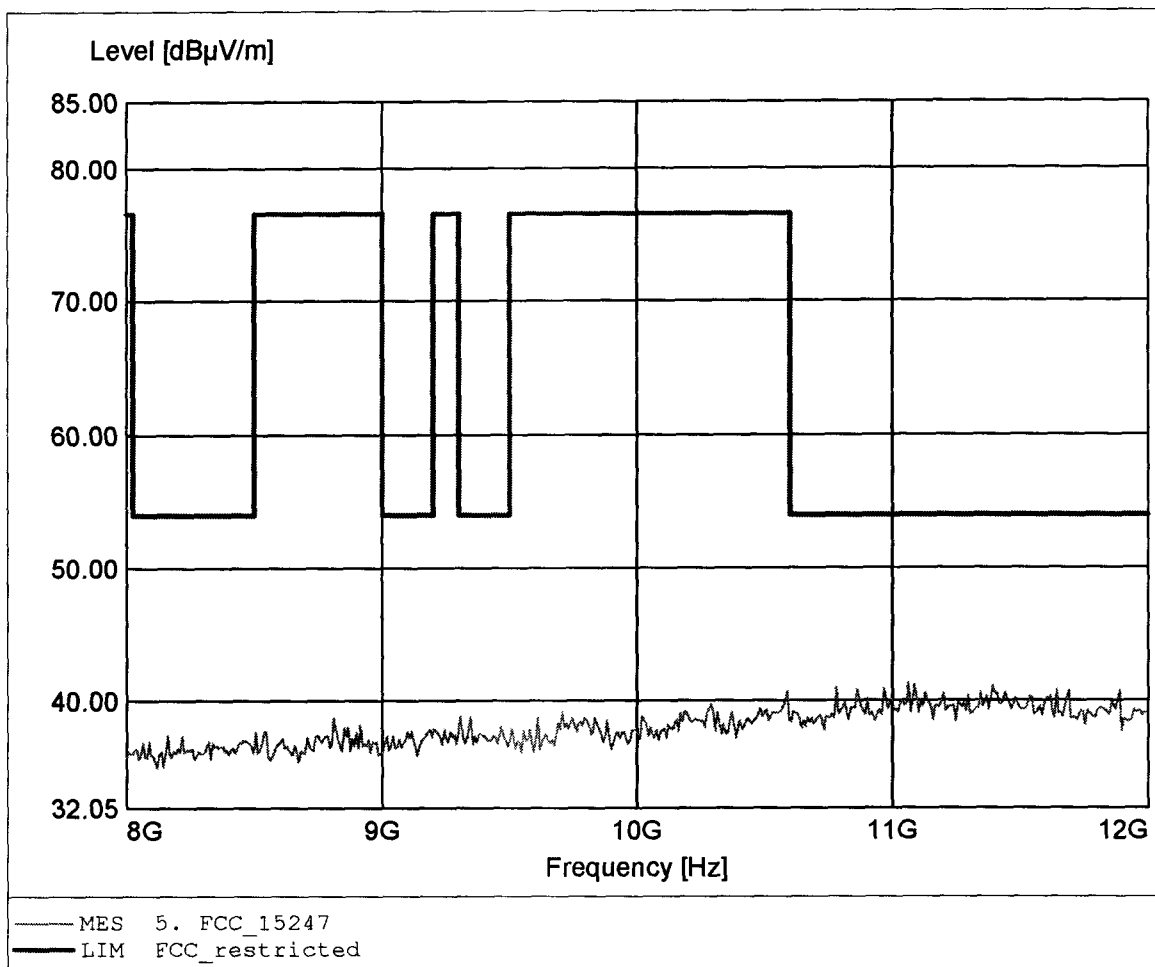

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.439GHz, Emax: 41.62dBμV/m, RBW: 1MHz

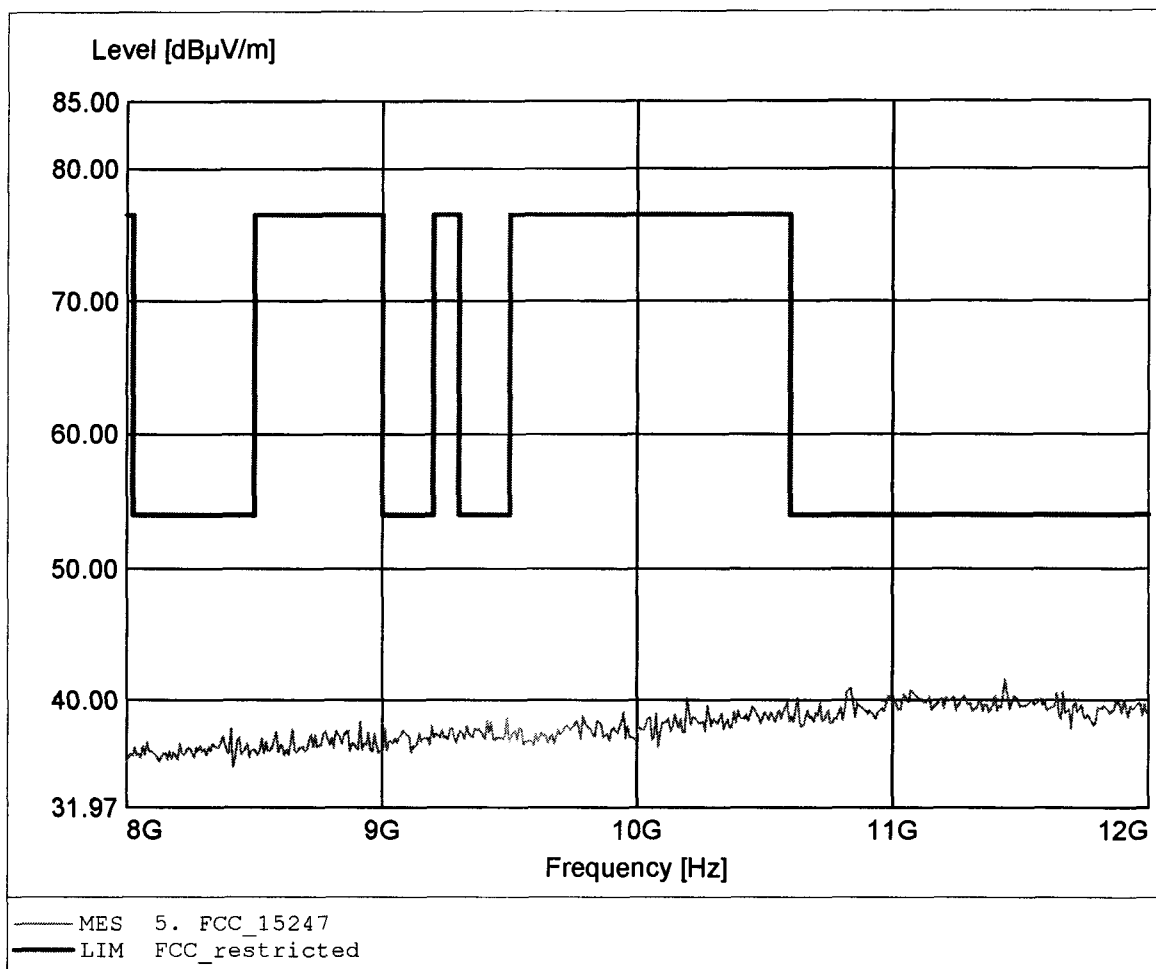

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.415GHz, Emax: 43.48dBµV/m, RBW: 1MHz

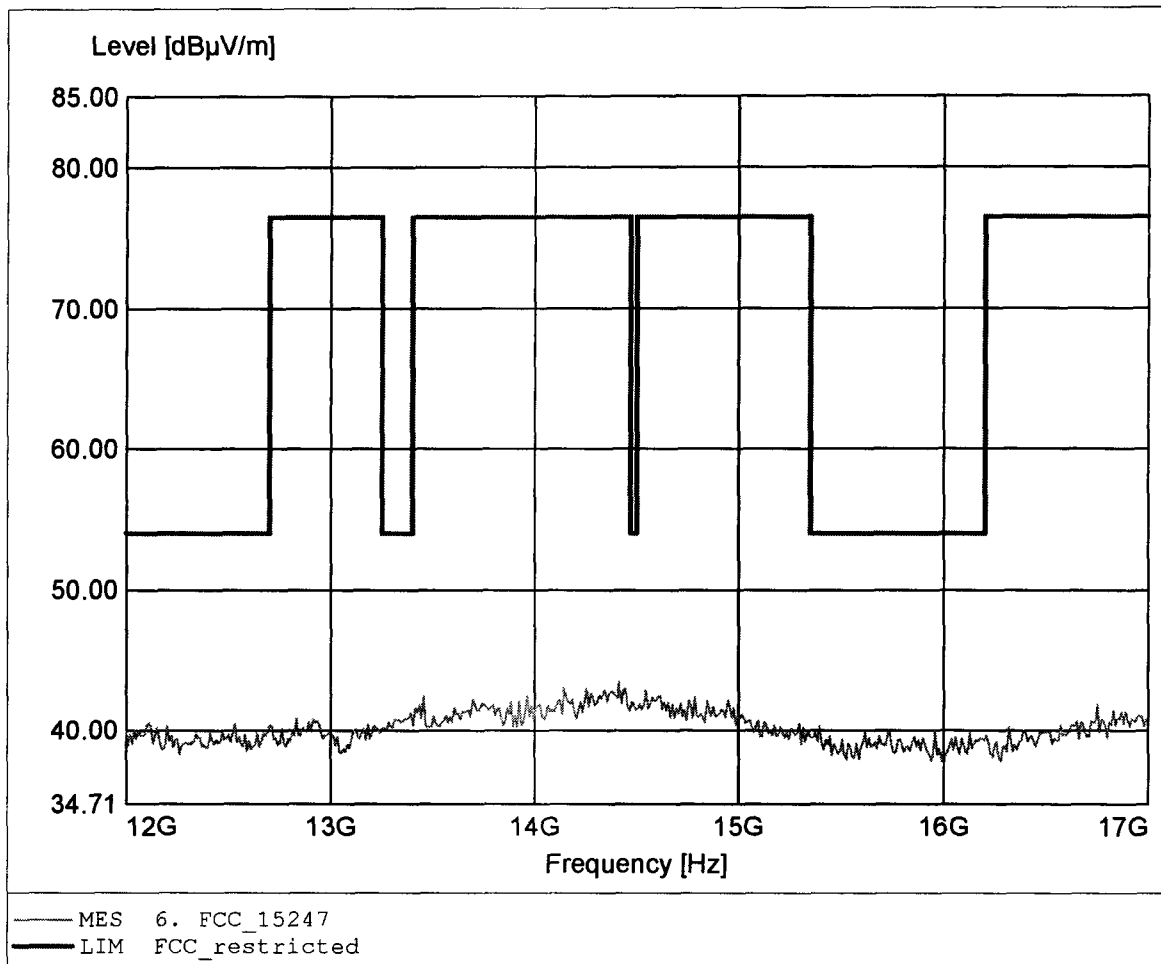

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.285GHz, Emax: 44.36dBμV/m, RBW: 1MHz

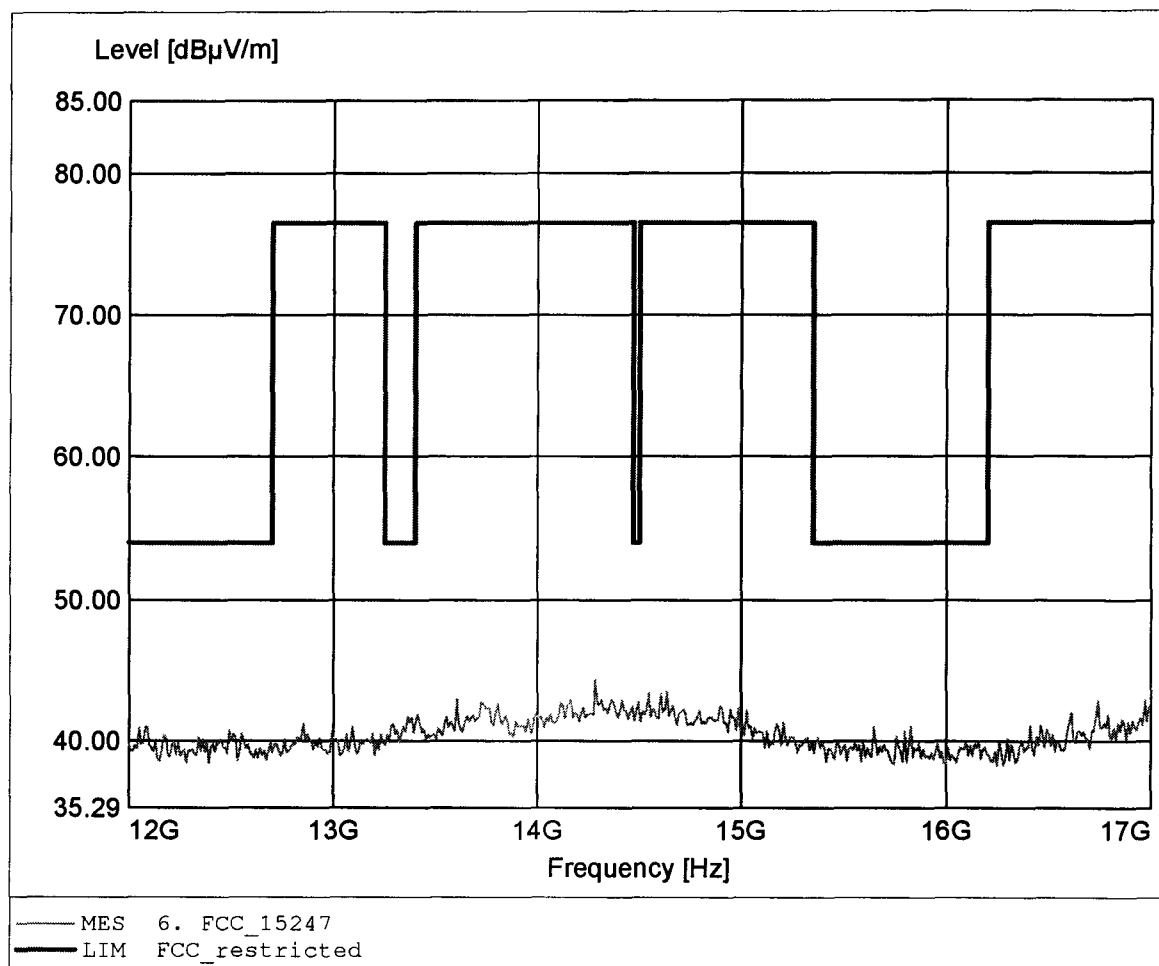

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 43.68dBμV/m, RBW: 1MHz

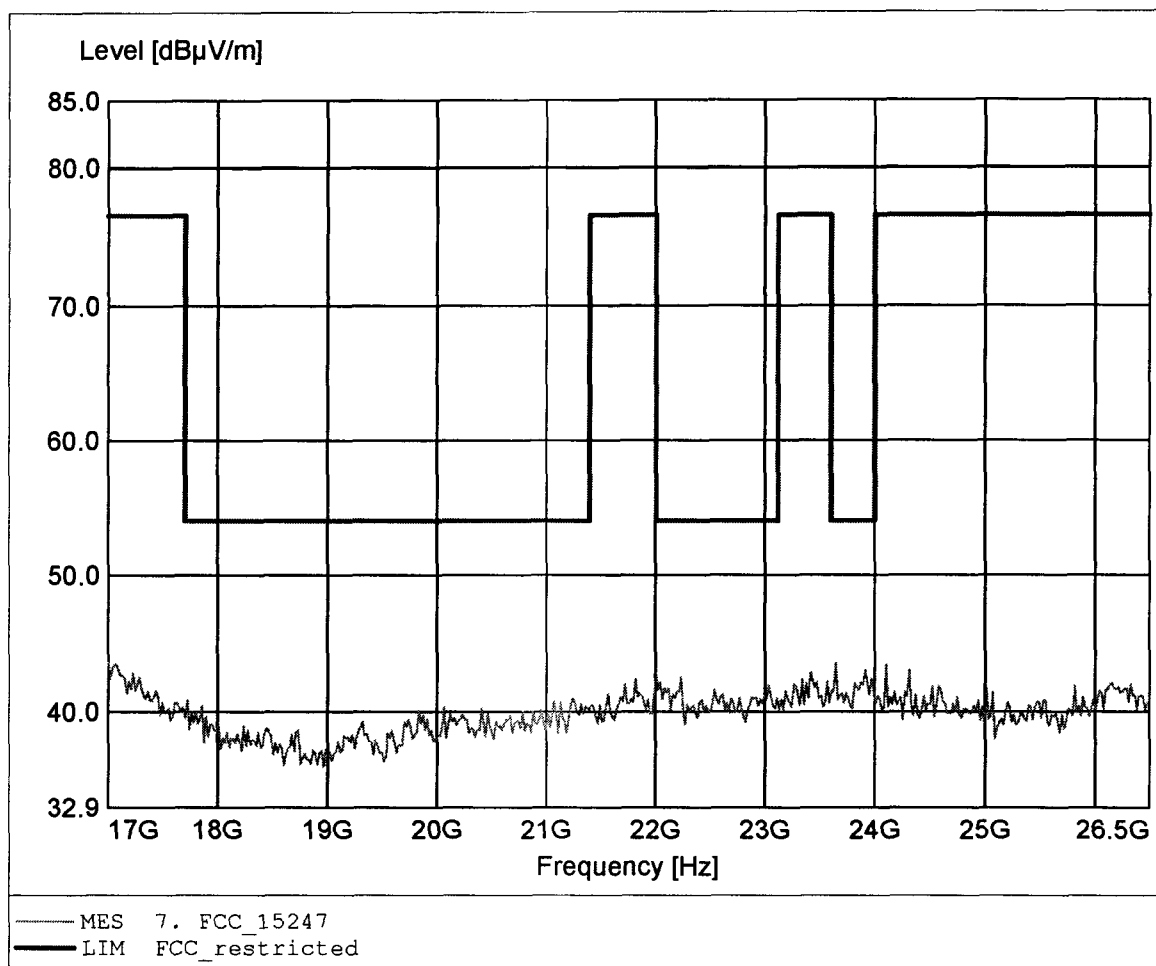

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.114GHz, Emax: 43.34dBμV/m, RBW: 1MHz

