


Test Mode: TX N-20M Mode 2437 MHz

Vertical

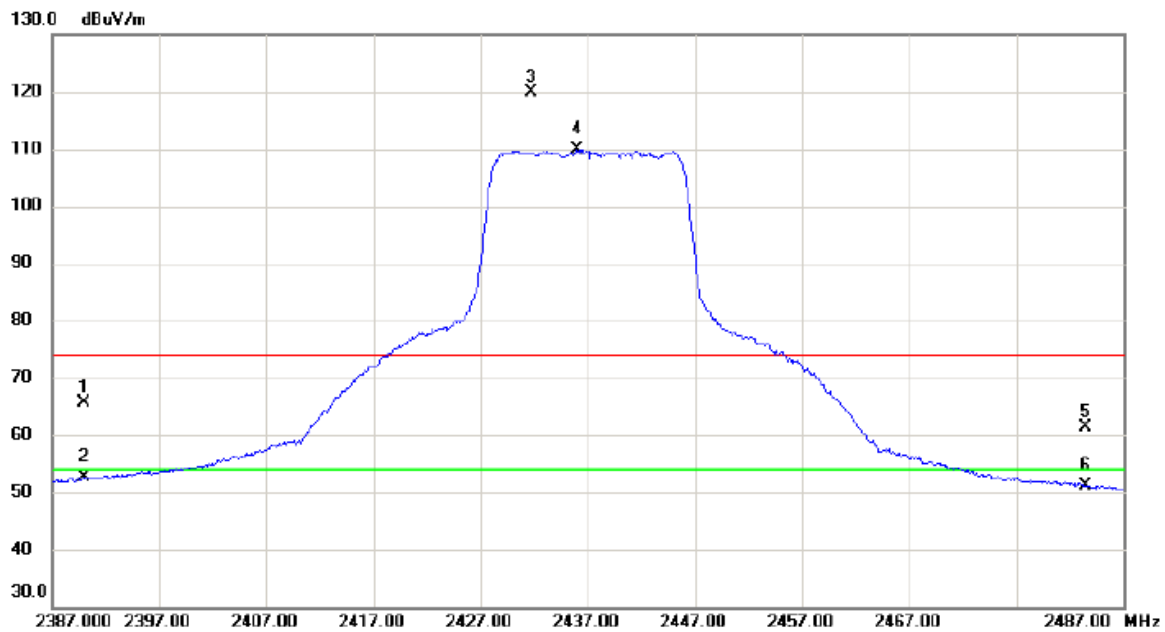


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	55.80	9.95	65.75	74.00	-8.25	peak	
2		2390.000	42.72	9.95	52.67	54.00	-1.33	AVG	
3	X	2431.750	109.83	10.10	119.93	74.00	45.93	peak	No Limit
4	*	2435.950	99.80	10.12	109.92	54.00	55.92	AVG	No Limit
5		2483.500	51.03	10.29	61.32	74.00	-12.68	peak	
6		2483.500	40.80	10.29	51.09	54.00	-2.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

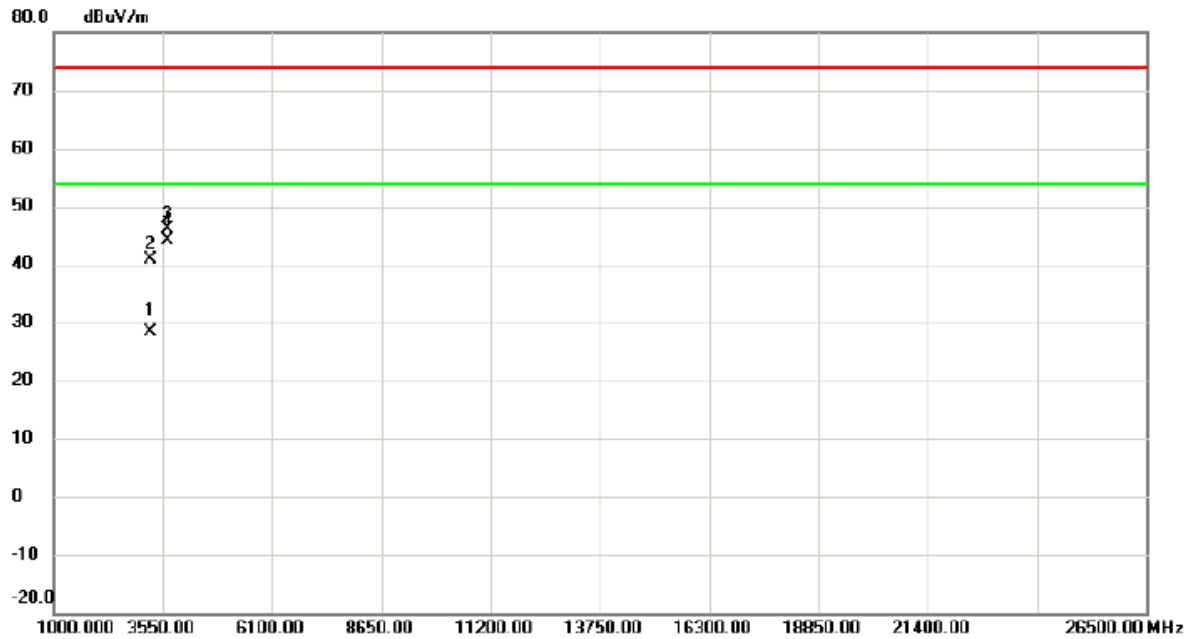

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3249.943	25.34	3.15	28.49	54.00	-25.51	AVG	
2		3249.990	37.64	3.15	40.79	74.00	-33.21	peak	
3		3655.670	42.30	3.80	46.10	74.00	-27.90	peak	
4 *		3655.670	40.27	3.80	44.07	54.00	-9.93	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

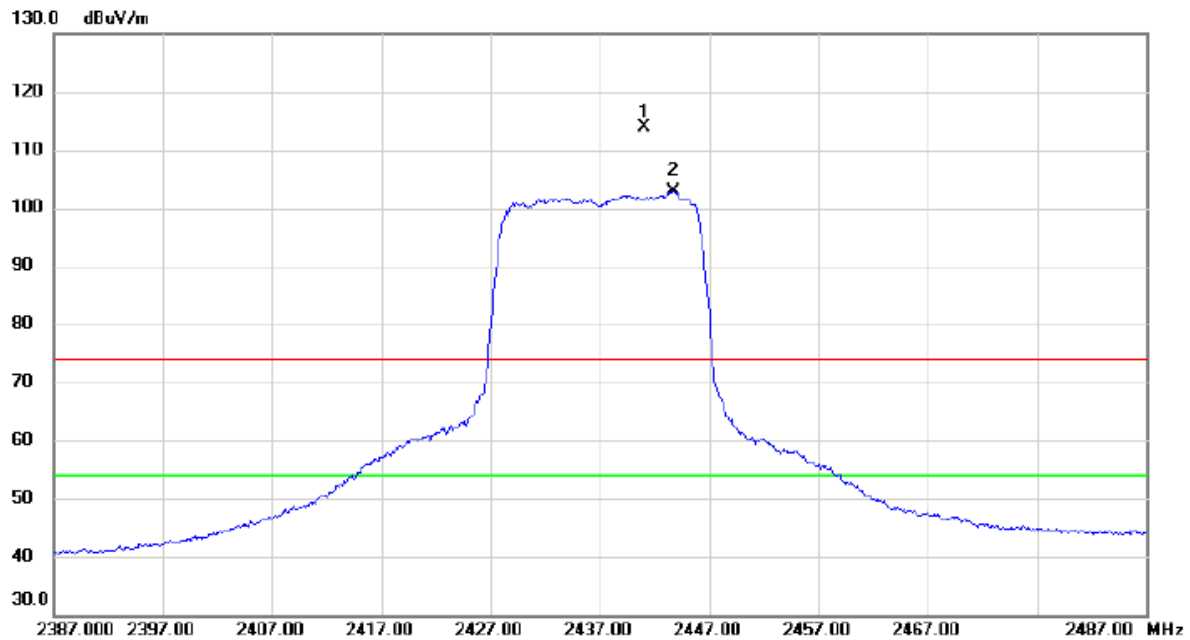


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2441.100	103.64	10.14	113.78	74.00	39.78	peak	No Limit
2	*	2443.700	92.67	10.15	102.82	54.00	48.82	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

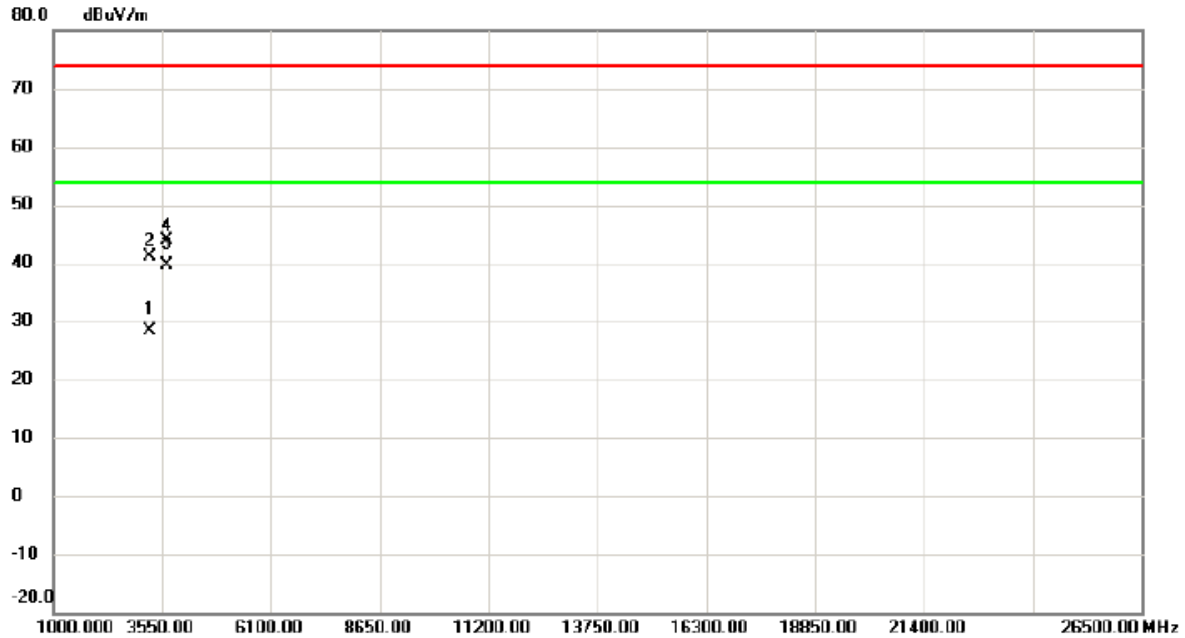


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3249.613	25.21	3.15	28.36	54.00	-25.64	AVG	
2		3250.863	38.02	3.15	41.17	74.00	-32.83	peak	
3	*	3655.330	35.86	3.80	39.66	54.00	-14.34	AVG	
4		3655.830	40.03	3.80	43.83	74.00	-30.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2457 MHz

Vertical

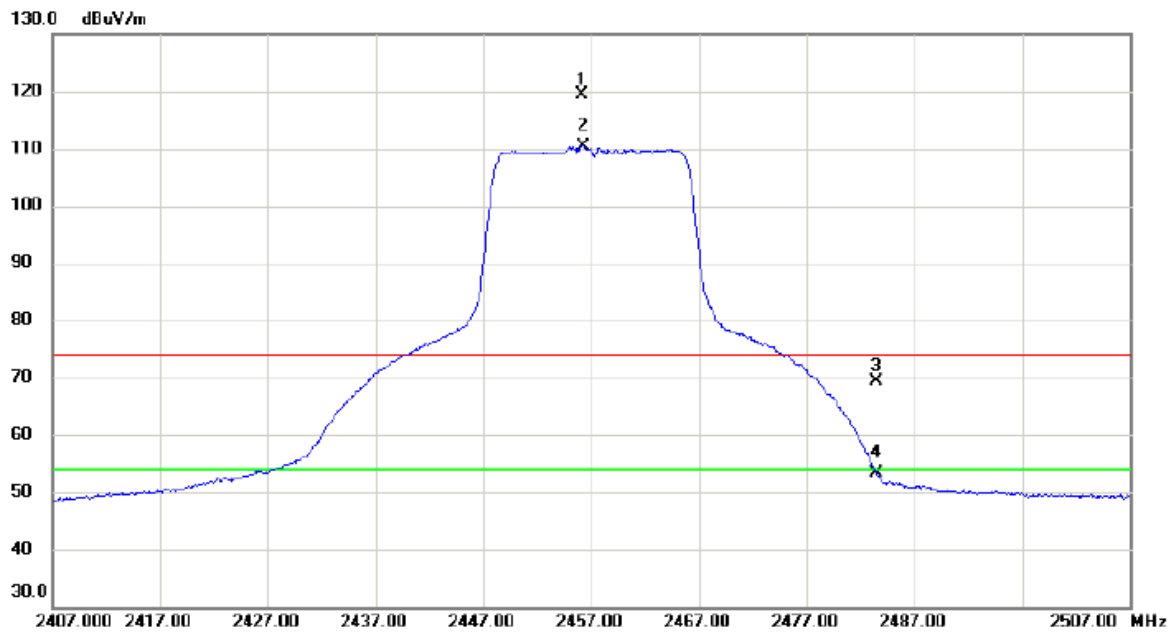

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.200	109.23	10.19	119.42	74.00	45.42	peak	No Limit
2	*	2456.300	100.31	10.19	110.50	54.00	56.50	AVG	No Limit
3		2483.500	59.09	10.29	69.38	74.00	-4.62	peak	
4		2483.500	43.19	10.29	53.48	54.00	-0.52	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2457 MHz

Vertical

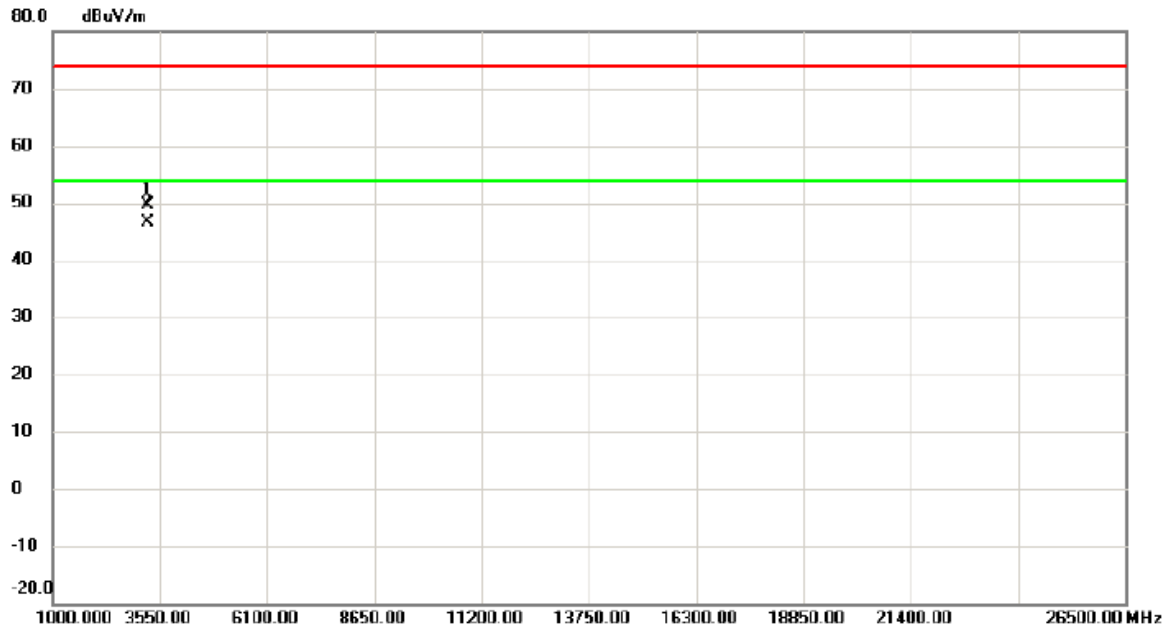


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3275.940	46.37	3.20	49.57	74.00	-24.43	peak	
2	*	3276.050	43.49	3.20	46.69	54.00	-7.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2457 MHz

Horizontal

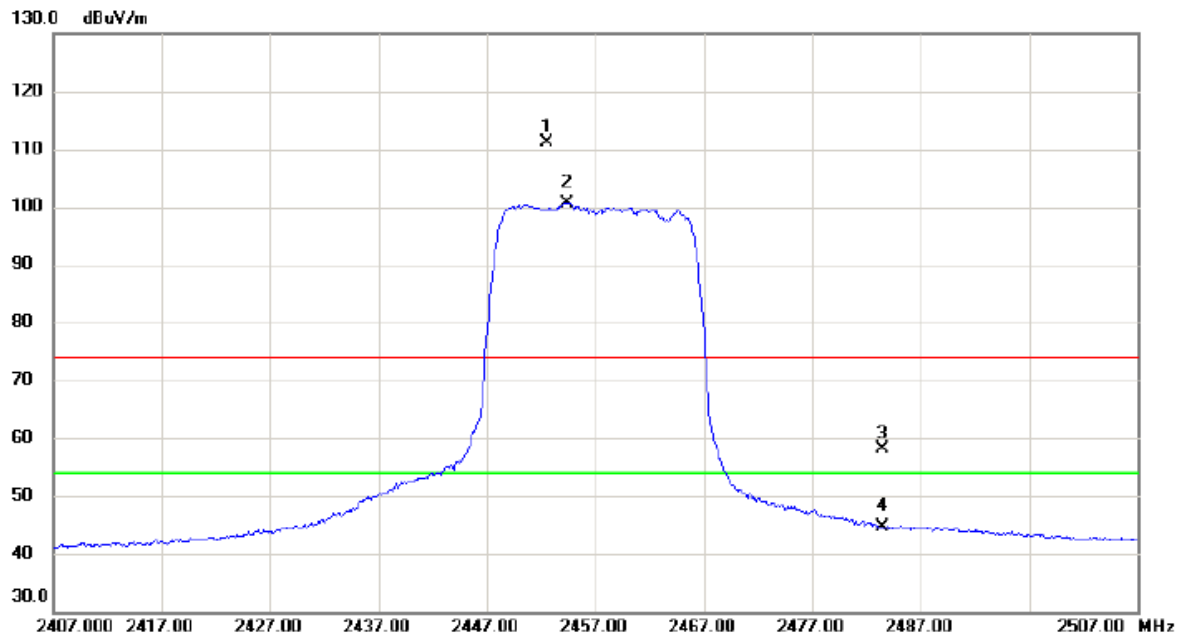

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2452.550	100.99	10.18	111.17	74.00	37.17	peak	No Limit
2	*	2454.350	90.54	10.19	100.73	54.00	46.73	AVG	No Limit
3		2483.500	47.87	10.29	58.16	74.00	-15.84	peak	
4		2483.500	34.26	10.29	44.55	54.00	-9.45	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2457 MHz

Horizontal

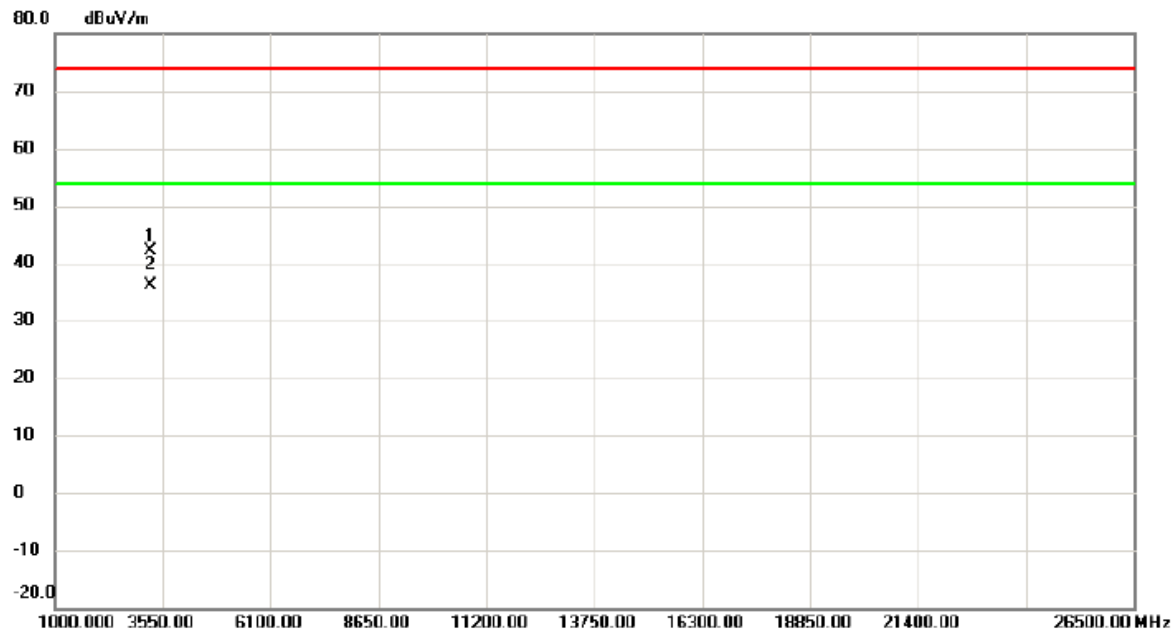


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3275.980	38.99	3.20	42.19	74.00	-31.81	peak	
2	*	3276.080	32.82	3.20	36.02	54.00	-17.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Vertical

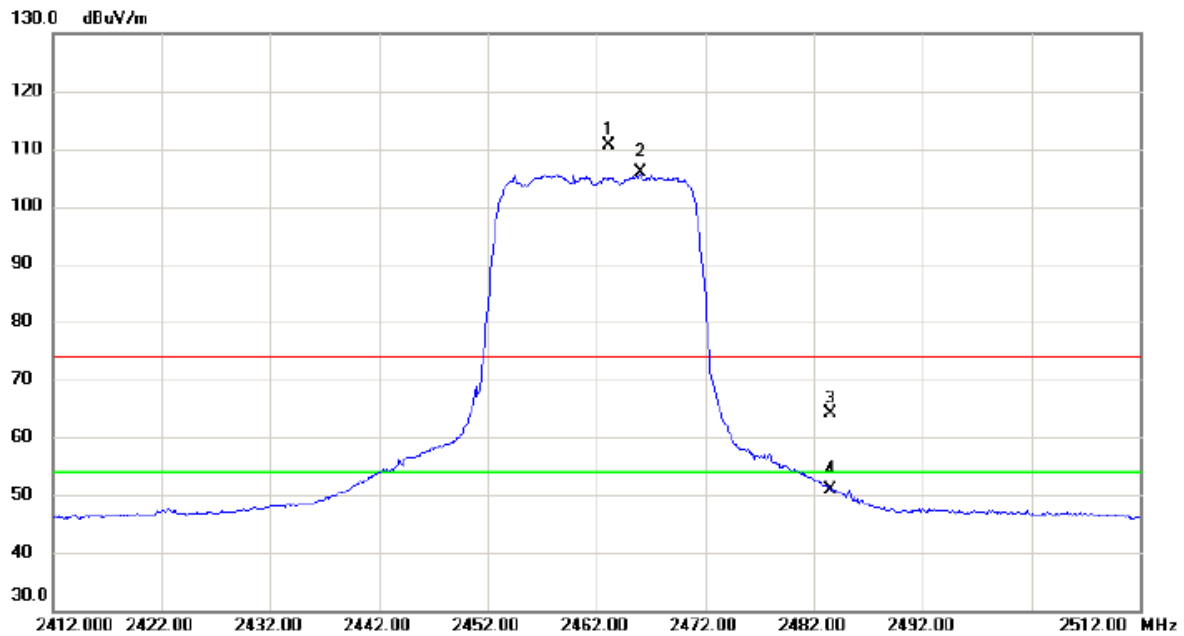

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2463.200	100.46	10.23	110.69	74.00	36.69	peak	No Limit
2	*	2466.000	95.63	10.24	105.87	54.00	51.87	AVG	No Limit
3		2483.500	53.86	10.29	64.15	74.00	-9.85	peak	
4		2483.500	40.63	10.29	50.92	54.00	-3.08	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Vertical

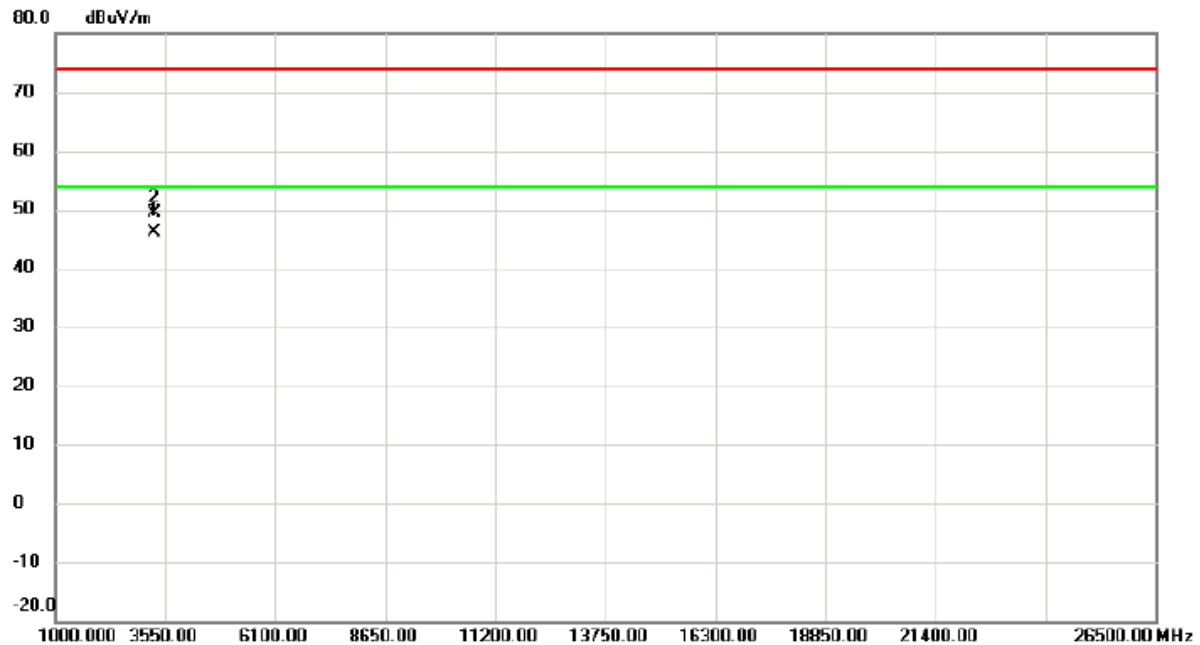


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	3282.710	42.89	3.21	46.10	54.00	-7.90	AVG	
2		3282.807	46.08	3.21	49.29	74.00	-24.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Horizontal

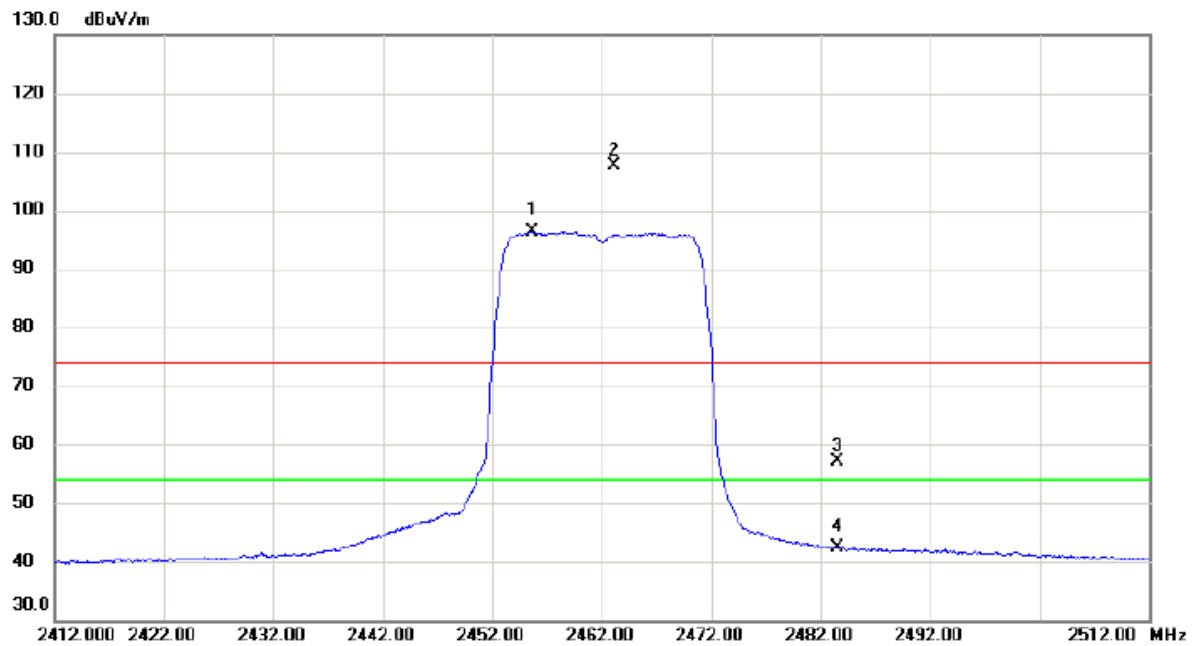

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2455.650	86.29	10.19	96.48	54.00	42.48	AVG	No Limit
2	X	2463.100	97.47	10.23	107.70	74.00	33.70	peak	No Limit
3		2483.500	46.79	10.29	57.08	74.00	-16.92	peak	
4		2483.500	32.18	10.29	42.47	54.00	-11.53	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Horizontal

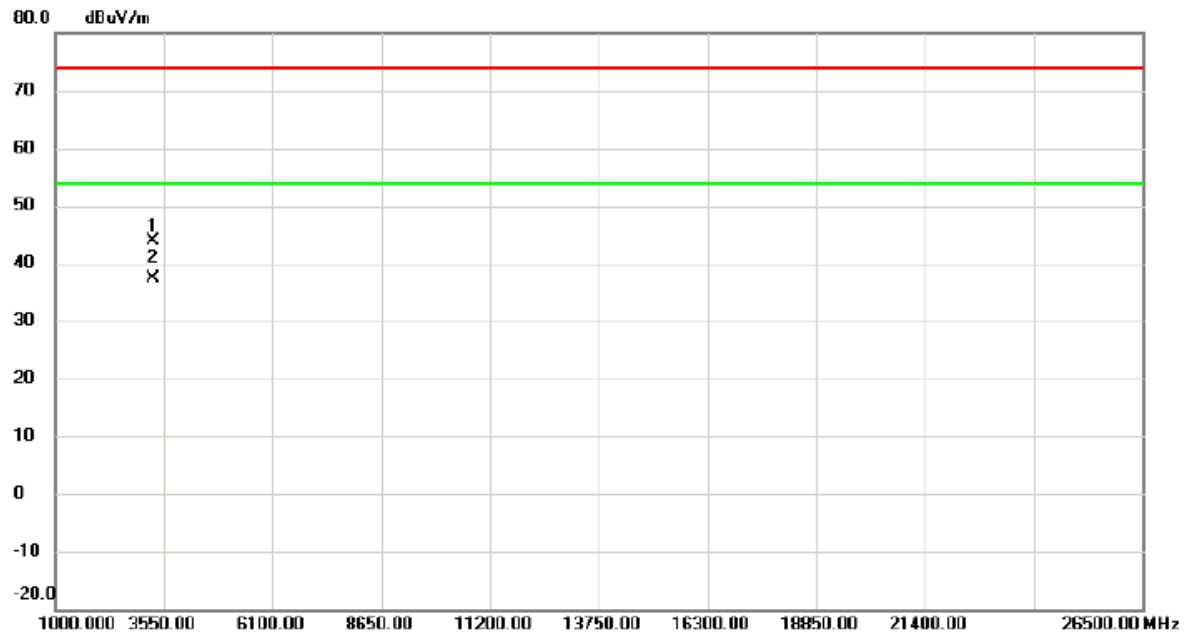


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3282.580	40.74	3.21	43.95	74.00	-30.05	peak	
2	*	3282.630	34.19	3.21	37.40	54.00	-16.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422 MHz

Vertical

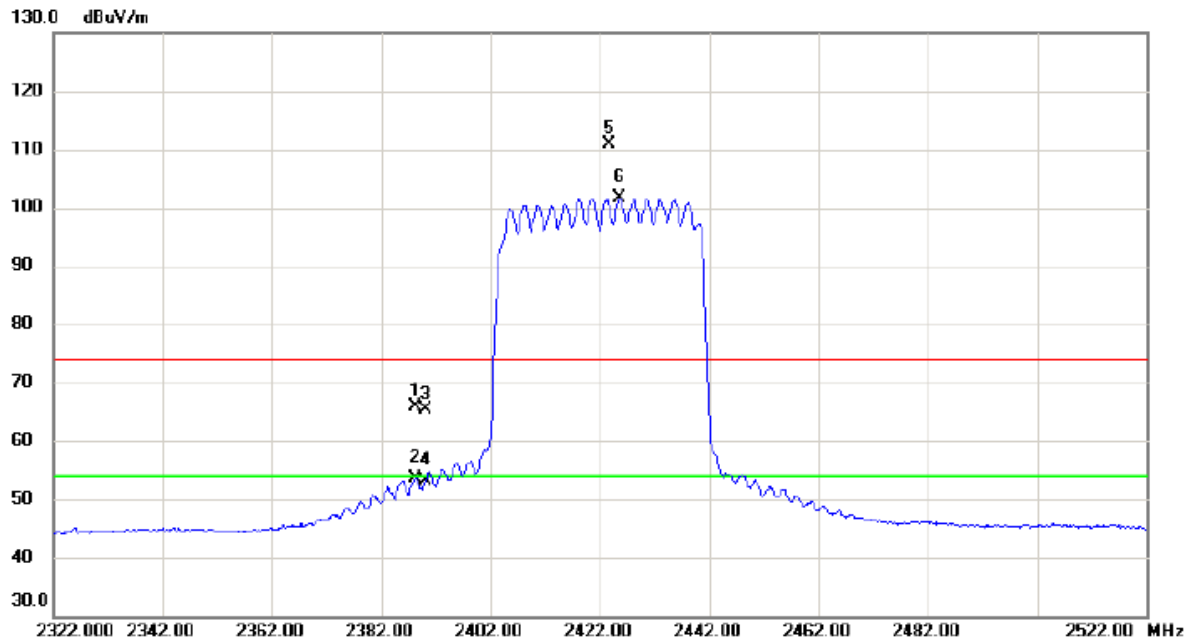


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.200	55.85	9.94	65.79	74.00	-8.21	peak	
2		2388.200	43.62	9.94	53.56	54.00	-0.44	AVG	
3		2390.000	55.32	9.95	65.27	74.00	-8.73	peak	
4		2390.000	43.19	9.95	53.14	54.00	-0.86	AVG	
5	X	2423.700	100.78	10.07	110.85	74.00	36.85	peak	No Limit
6	*	2425.700	91.62	10.08	101.70	54.00	47.70	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422 MHz

Vertical

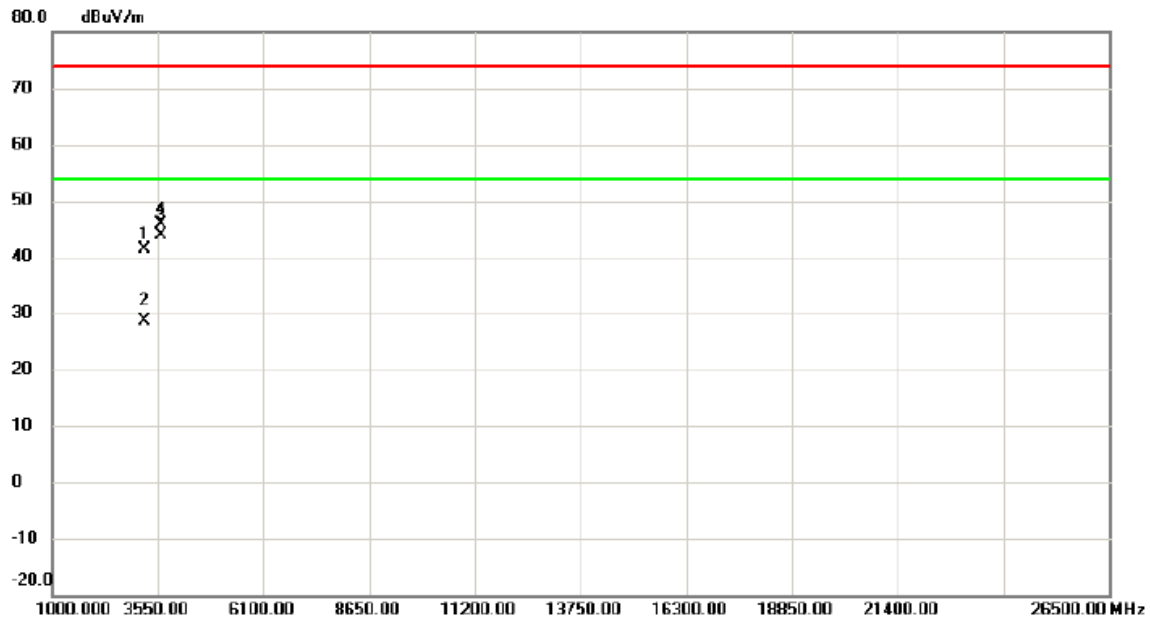

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3227.088	38.18	3.11	41.29	74.00	-32.71	peak	
2		3228.820	25.43	3.11	28.54	54.00	-25.46	AVG	
3	*	3632.830	40.24	3.76	44.00	54.00	-10.00	AVG	
4		3633.330	42.19	3.76	45.95	74.00	-28.05	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422 MHz

Horizontal

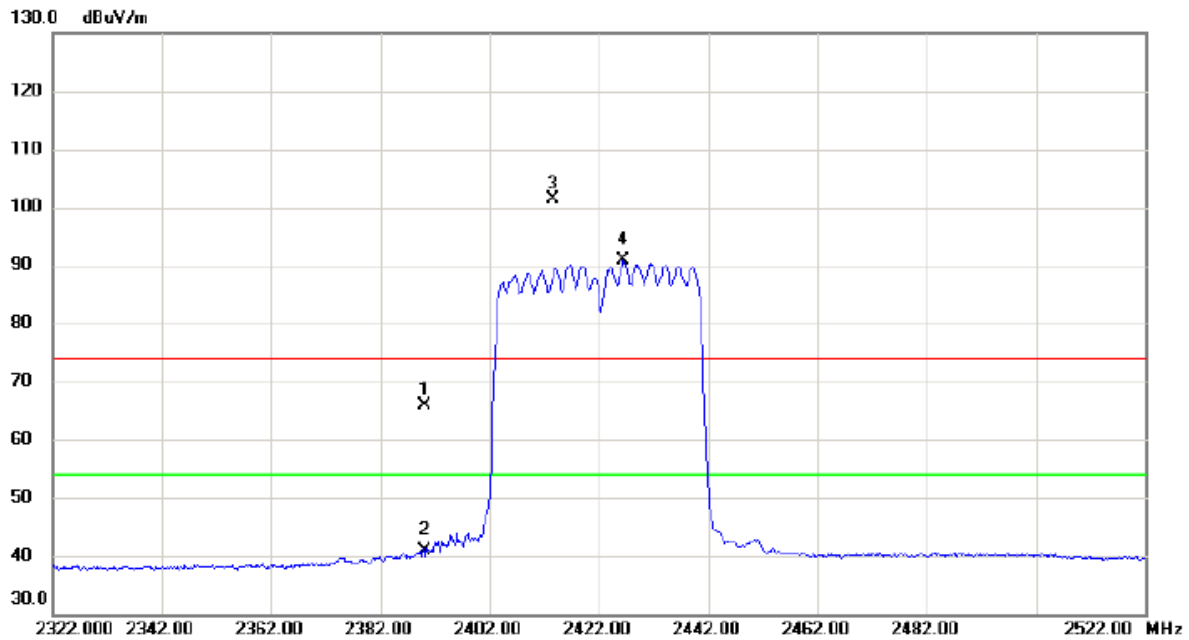


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	55.85	9.95	65.80	74.00	-8.20	peak	
2		2390.000	31.01	9.95	40.96	54.00	-13.04	AVG	
3	X	2413.500	91.35	10.04	101.39	74.00	27.39	peak	No Limit
4	*	2426.500	80.68	10.08	90.76	54.00	36.76	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422 MHz

Horizontal

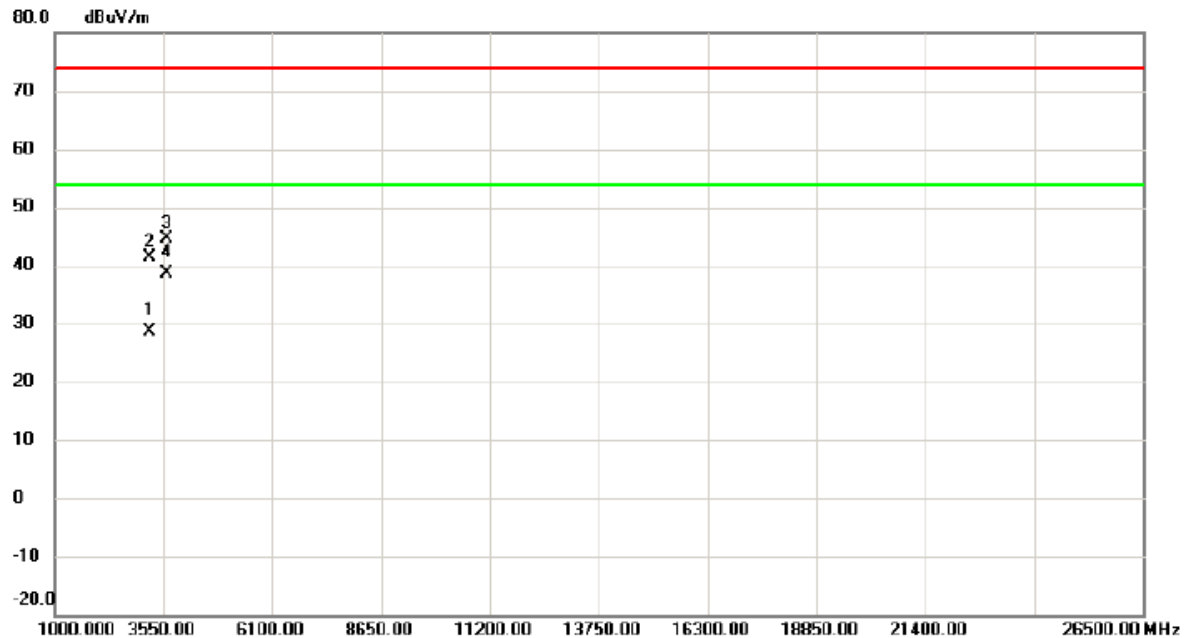


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3227.593	25.47	3.11	28.58	54.00	-25.42	AVG	
2		3228.472	38.33	3.11	41.44	74.00	-32.56	peak	
3		3632.887	40.83	3.76	44.59	74.00	-29.41	peak	
4	*	3633.010	34.76	3.76	38.52	54.00	-15.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2427 MHz

Vertical

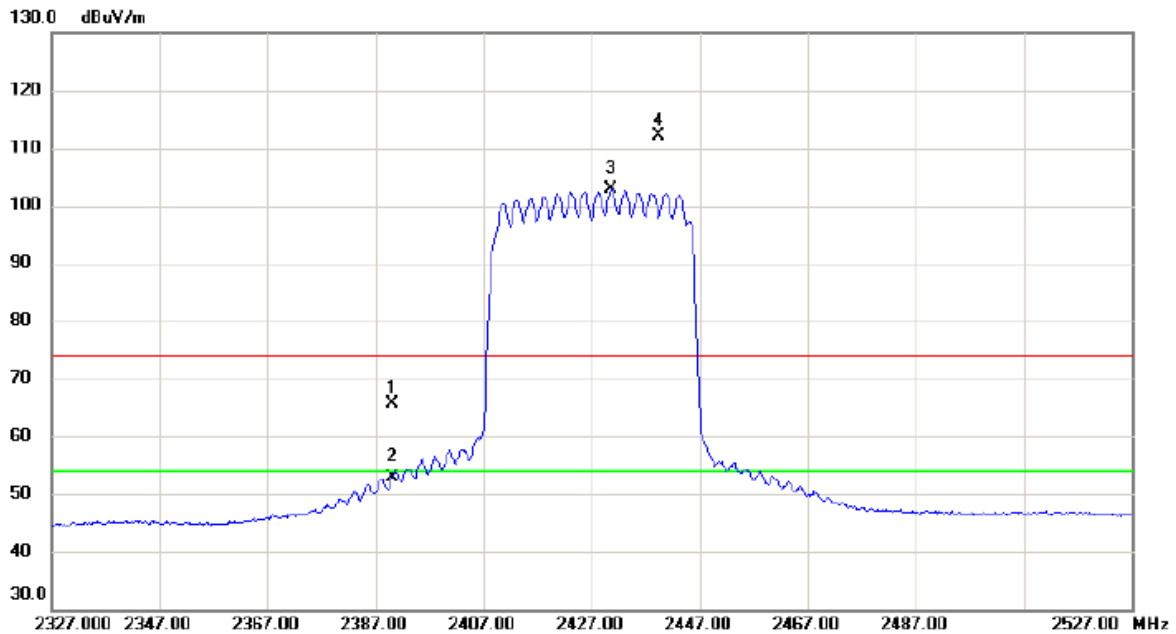

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	55.71	9.95	65.66	74.00	-8.34	peak	
2		2390.000	42.87	9.95	52.82	54.00	-1.18	AVG	
3	*	2430.700	92.76	10.10	102.86	54.00	48.86	AVG	No Limit
4	X	2439.300	102.03	10.14	112.17	74.00	38.17	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2427 MHz

Vertical

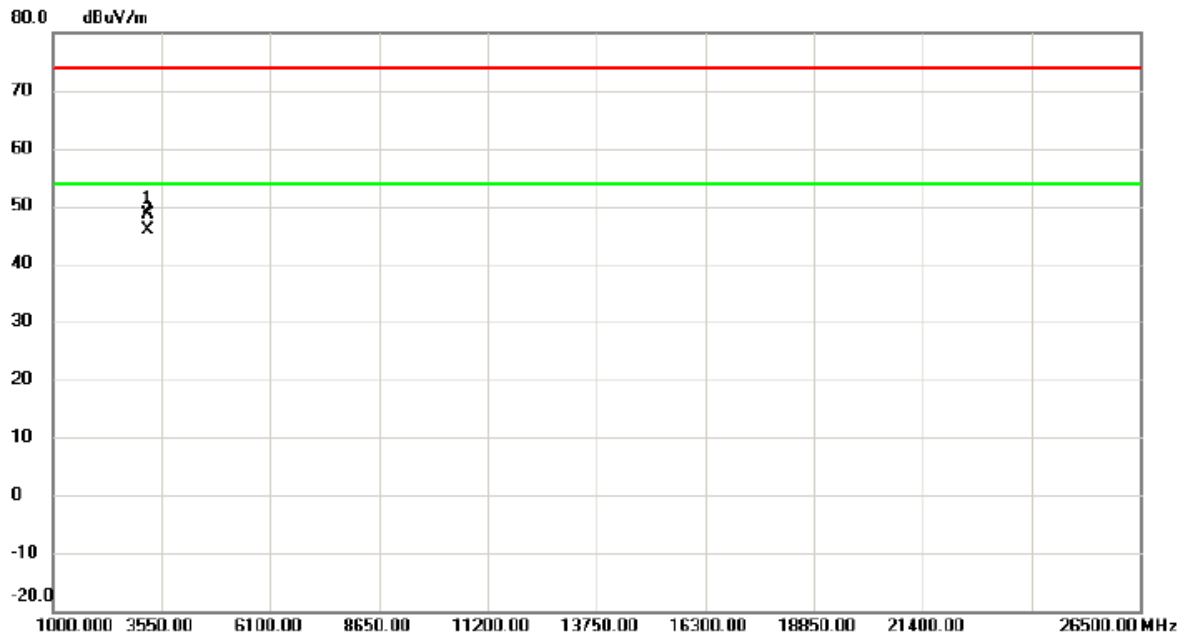


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3235.930	45.40	3.12	48.52	74.00	-25.48	peak	
2	*	3236.030	42.77	3.12	45.89	54.00	-8.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2427 MHz

Horizontal

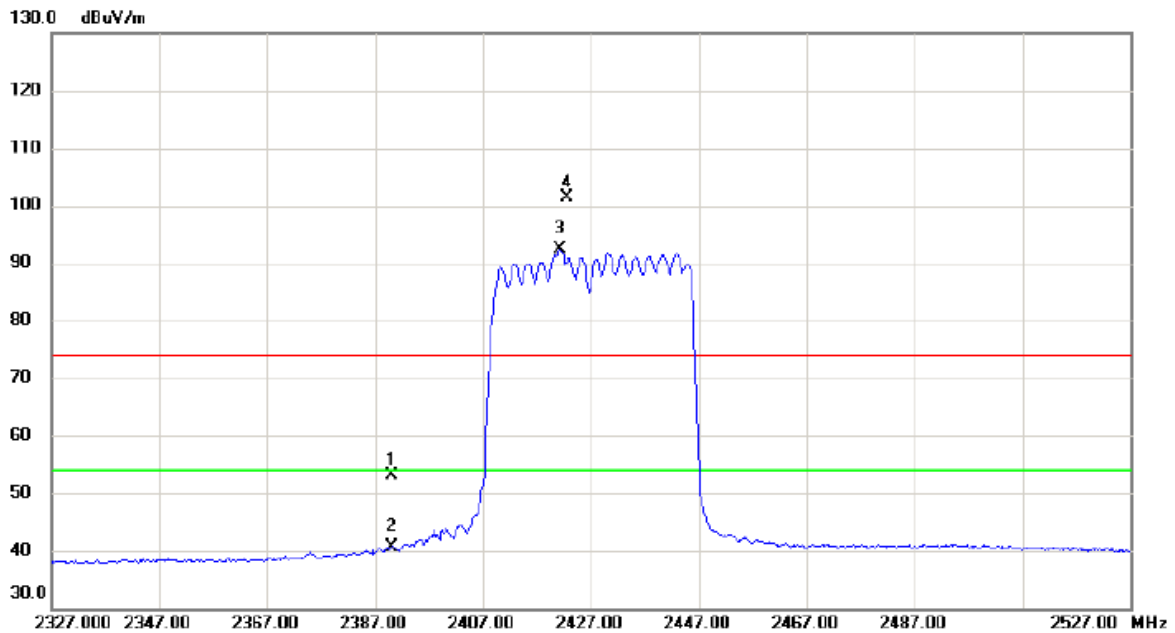

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	43.19	9.95	53.14	74.00	-20.86	peak	
2		2390.000	30.79	9.95	40.74	54.00	-13.26	AVG	
3	*	2421.300	82.20	10.07	92.27	54.00	38.27	AVG	No Limit
4	X	2422.700	91.29	10.07	101.36	74.00	27.36	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2427 MHz

Horizontal

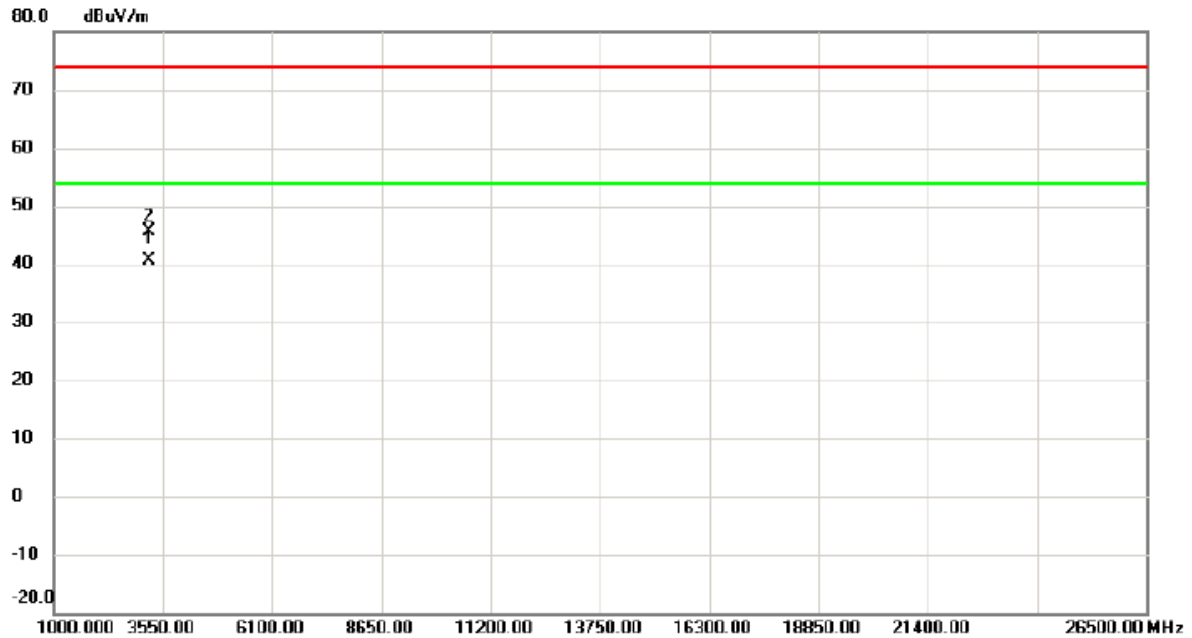


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	3236.088	37.48	3.12	40.60	54.00	-13.40	AVG	
2		3236.108	42.44	3.12	45.56	74.00	-28.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

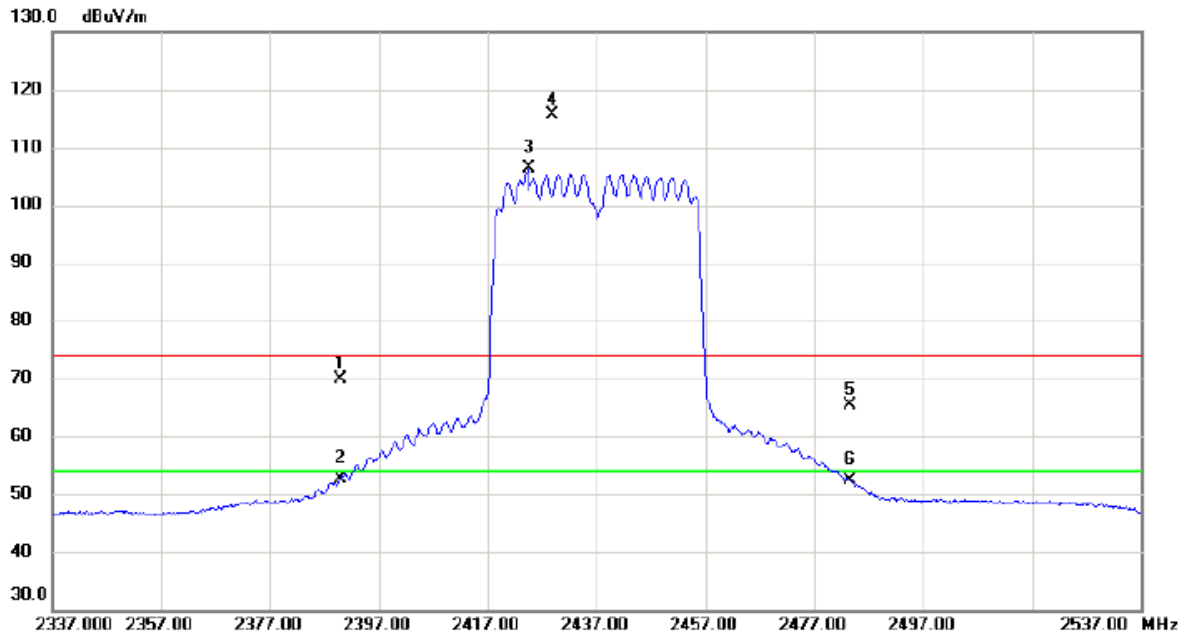


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	59.98	9.95	69.93	74.00	-4.07	peak	
2		2390.000	42.75	9.95	52.70	54.00	-1.30	AVG	
3	*	2424.500	96.20	10.07	106.27	54.00	52.27	AVG	No Limit
4	X	2428.900	105.57	10.09	115.66	74.00	41.66	peak	No Limit
5		2483.500	55.09	10.29	65.38	74.00	-8.62	peak	
6		2483.500	42.18	10.29	52.47	54.00	-1.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

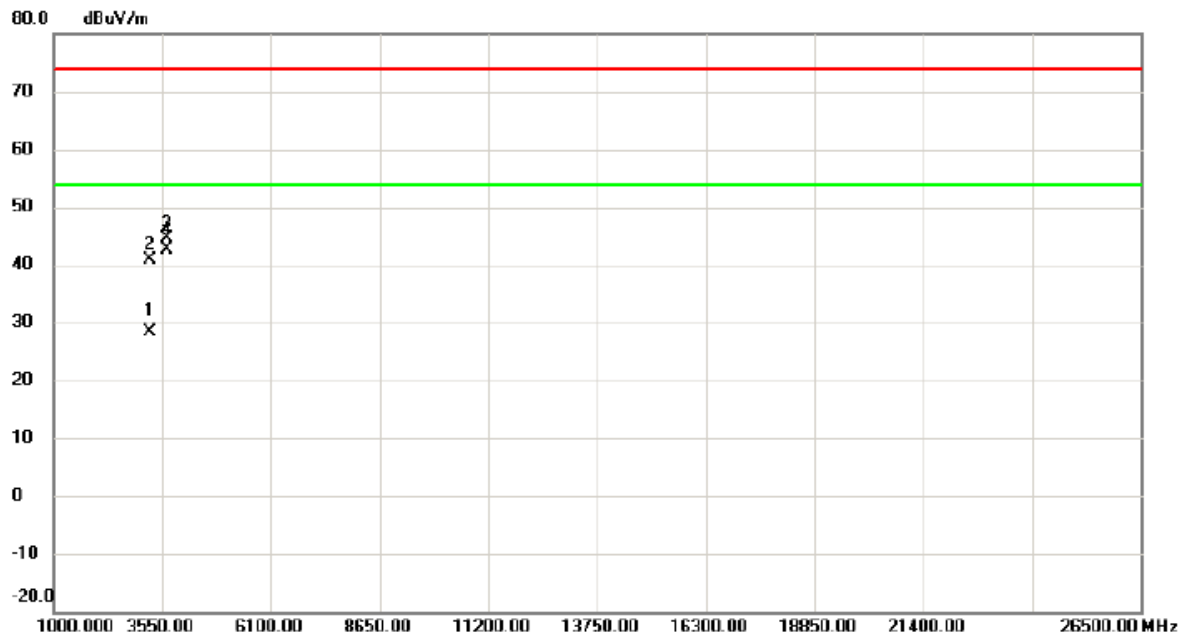

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3249.900	25.18	3.15	28.33	54.00	-25.67	AVG	
2		3250.247	37.65	3.15	40.80	74.00	-33.20	peak	
3		3655.330	40.90	3.80	44.70	74.00	-29.30	peak	
4 *		3655.330	38.89	3.80	42.69	54.00	-11.31	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

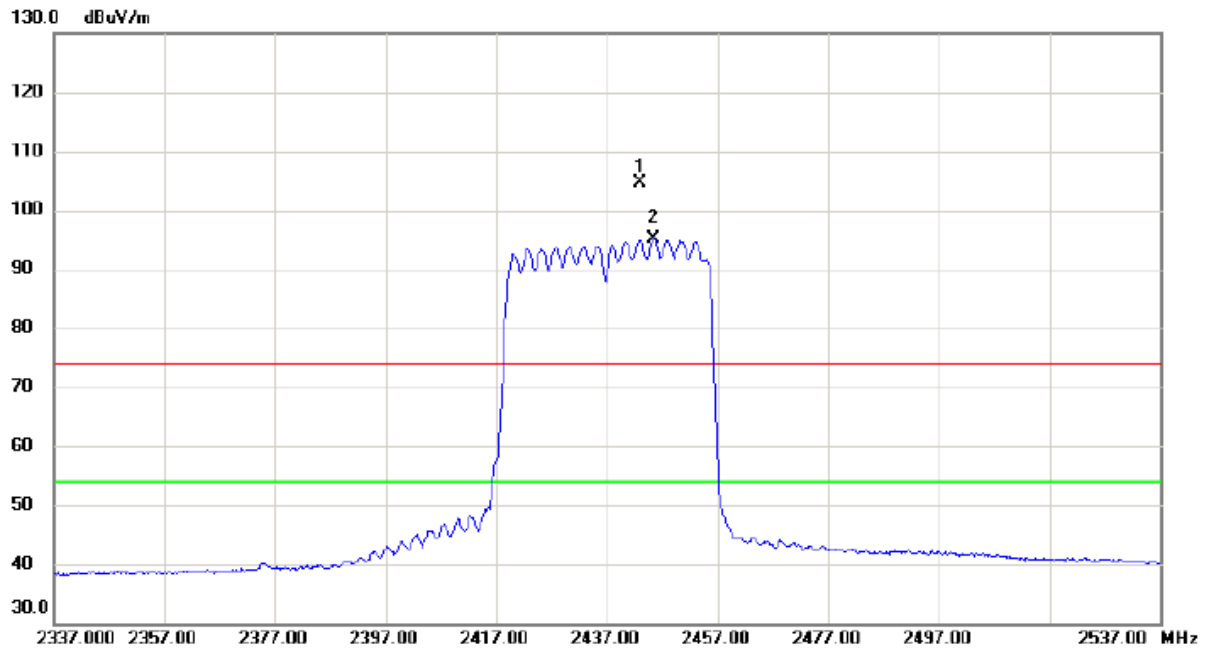

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2443.100	94.57	10.14	104.71	74.00	30.71	peak	No Limit
2	*	2445.500	85.07	10.16	95.23	54.00	41.23	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

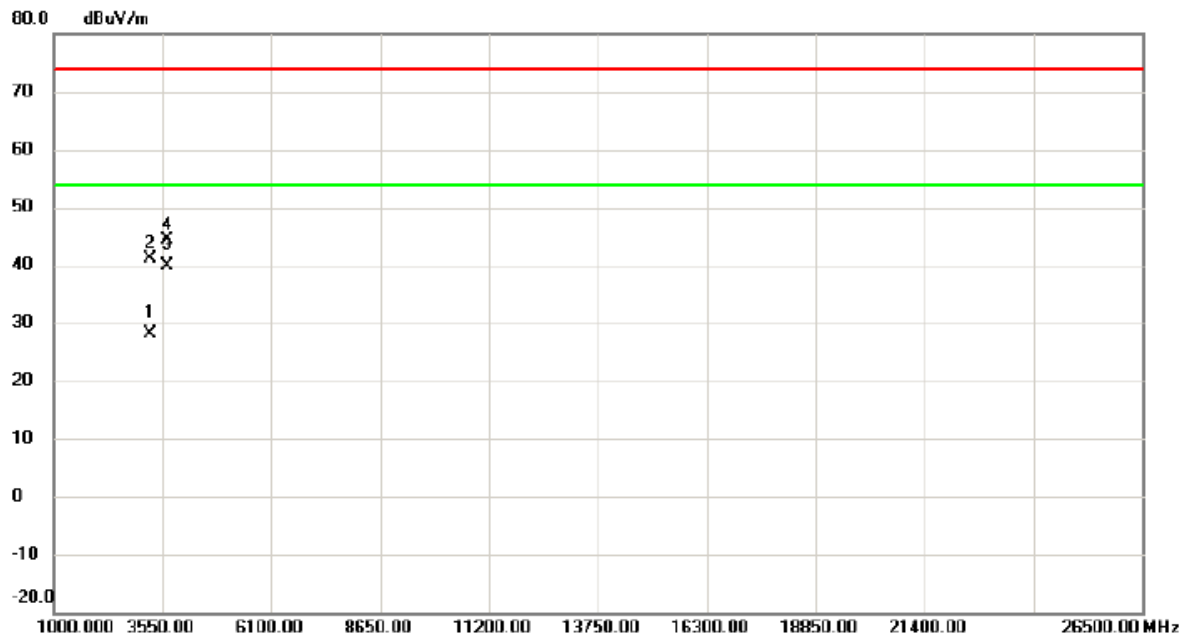

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3248.137	25.08	3.15	28.23	54.00	-25.77	AVG	
2		3248.488	37.91	3.15	41.06	74.00	-32.94	peak	
3	*	3655.330	36.15	3.80	39.95	54.00	-14.05	AVG	
4		3655.830	40.50	3.80	44.30	74.00	-29.70	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2447 MHz

Vertical

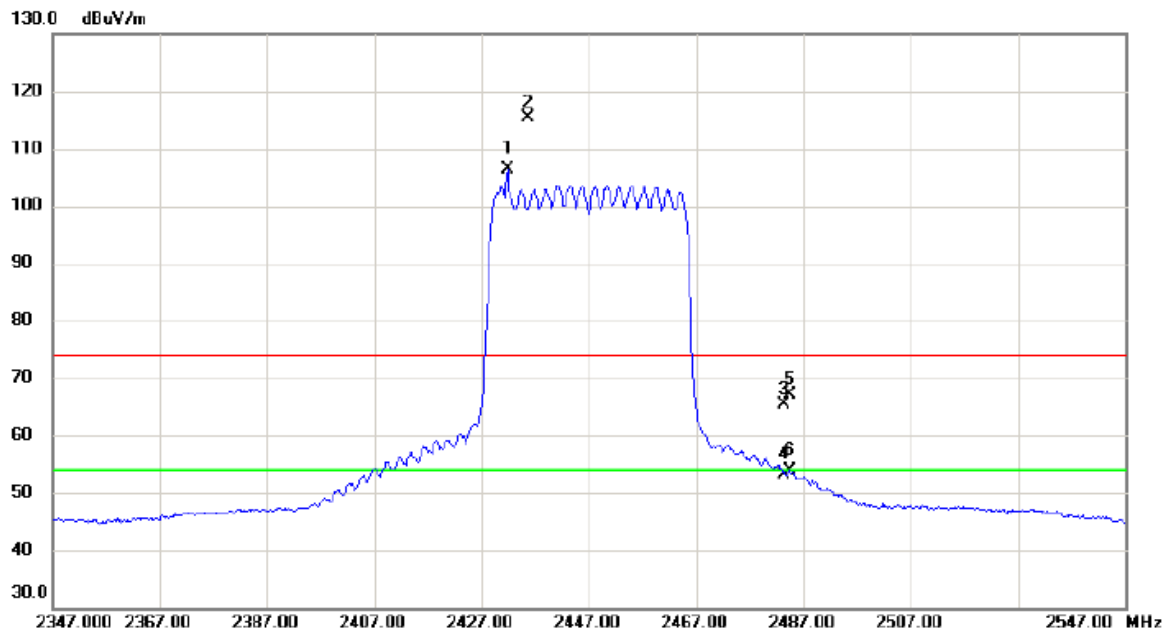


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2431.800	96.16	10.10	106.26	54.00	52.26	AVG	No Limit
2	X	2435.600	105.30	10.12	115.42	74.00	41.42	peak	No Limit
3		2483.500	55.03	10.29	65.32	74.00	-8.68	peak	
4		2483.500	42.84	10.29	53.13	54.00	-0.87	AVG	
5		2484.500	56.80	10.30	67.10	74.00	-6.90	peak	
6		2484.500	43.64	10.30	53.94	54.00	-0.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-40M Mode 2447 MHz
------------	------------------------

Vertical

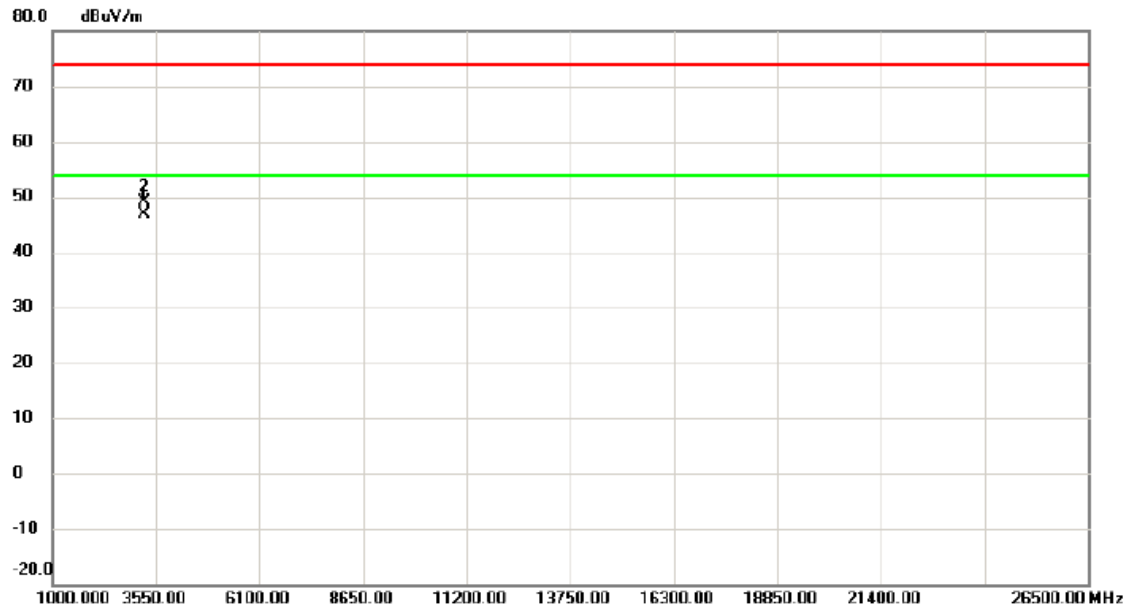


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	3262.680	43.62	3.18	46.80	54.00	-7.20	AVG	
2		3262.730	45.90	3.18	49.08	74.00	-24.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2447 MHz

Horizontal

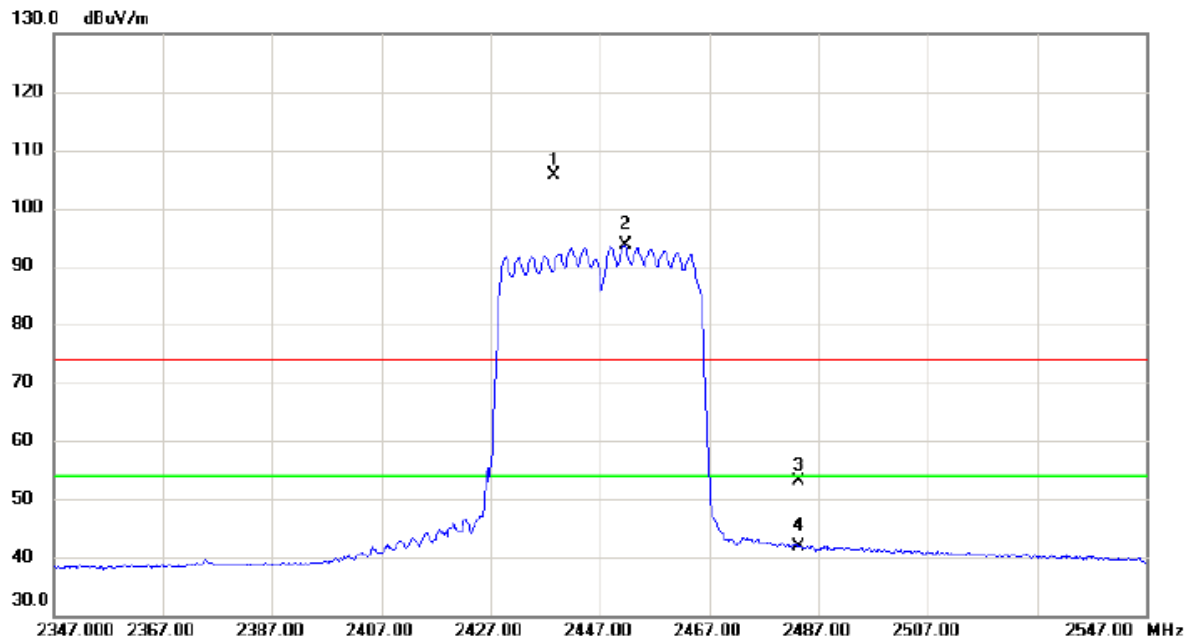


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2438.500	95.54	10.13	105.67	74.00	31.67	peak	No Limit
2	*	2451.600	83.44	10.17	93.61	54.00	39.61	AVG	No Limit
3		2483.500	42.81	10.29	53.10	74.00	-20.90	peak	
4		2483.500	31.49	10.29	41.78	54.00	-12.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2447 MHz

Horizontal

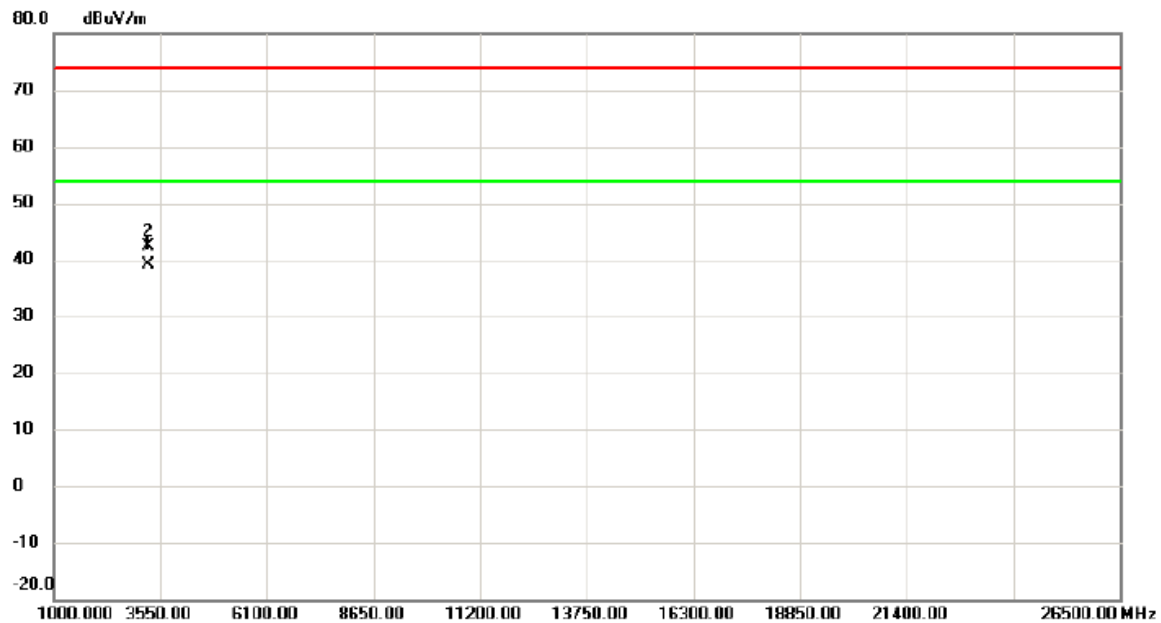


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	3262.680	35.97	3.18	39.15	54.00	-14.85	AVG	
2		3262.930	39.11	3.18	42.29	74.00	-31.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Vertical

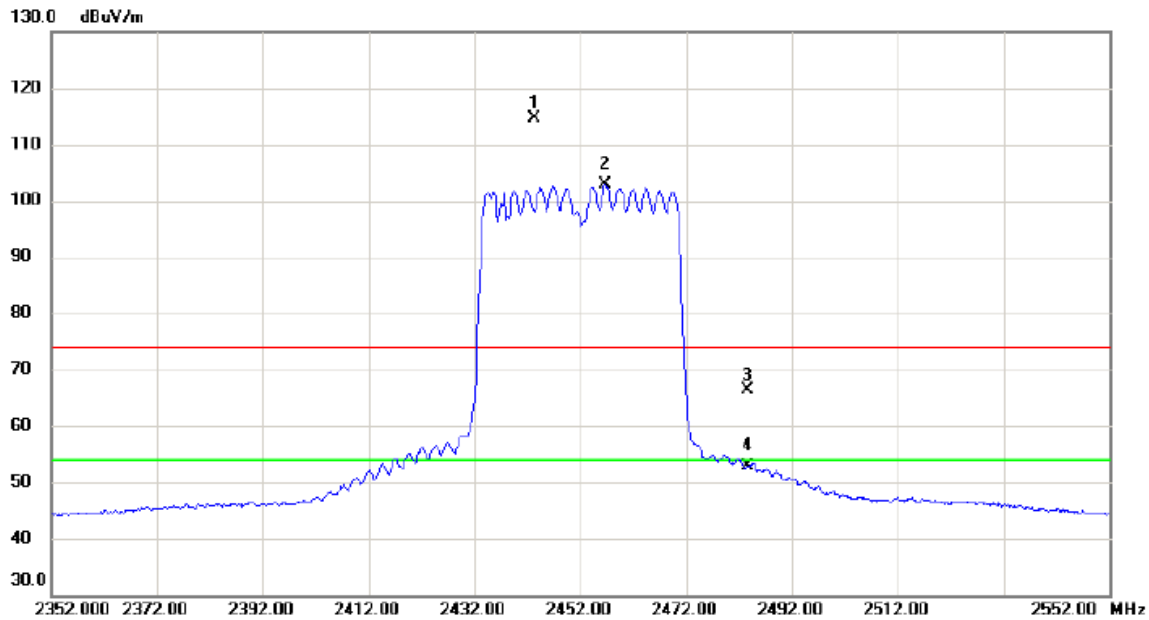

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2443.400	104.53	10.15	114.68	74.00	40.68	peak	No Limit
2	*	2456.600	92.64	10.19	102.83	54.00	48.83	AVG	No Limit
3		2483.500	56.05	10.29	66.34	74.00	-7.66	peak	
4		2483.500	42.61	10.29	52.90	54.00	-1.10	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Vertical

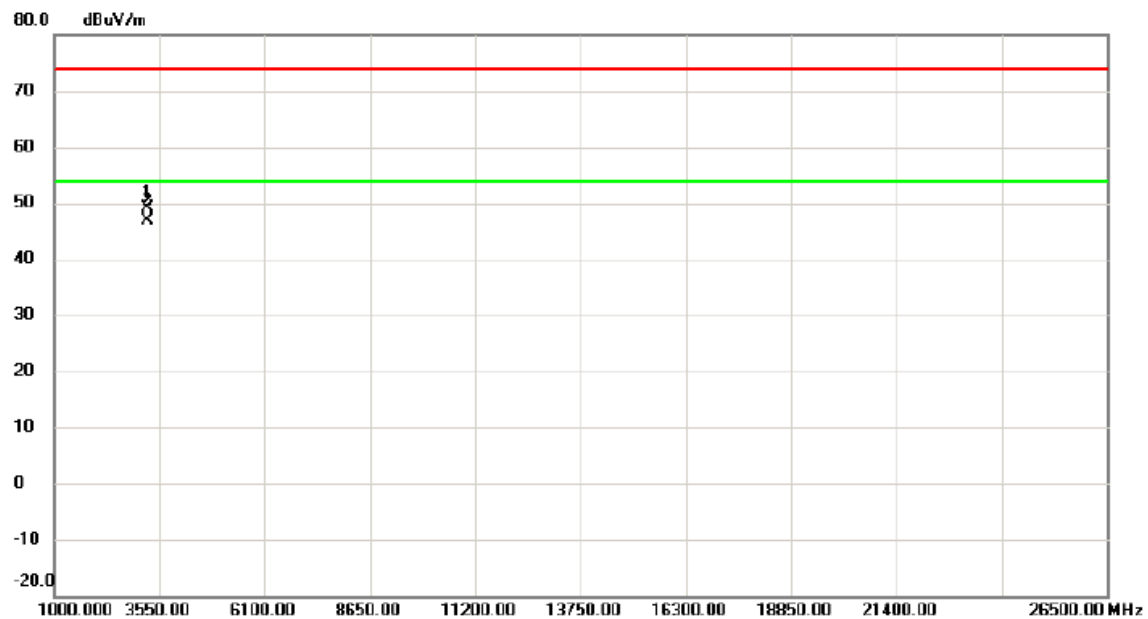


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3269.280	46.02	3.19	49.21	74.00	-24.79	peak	
2	*	3269.480	43.70	3.19	46.89	54.00	-7.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Horizontal

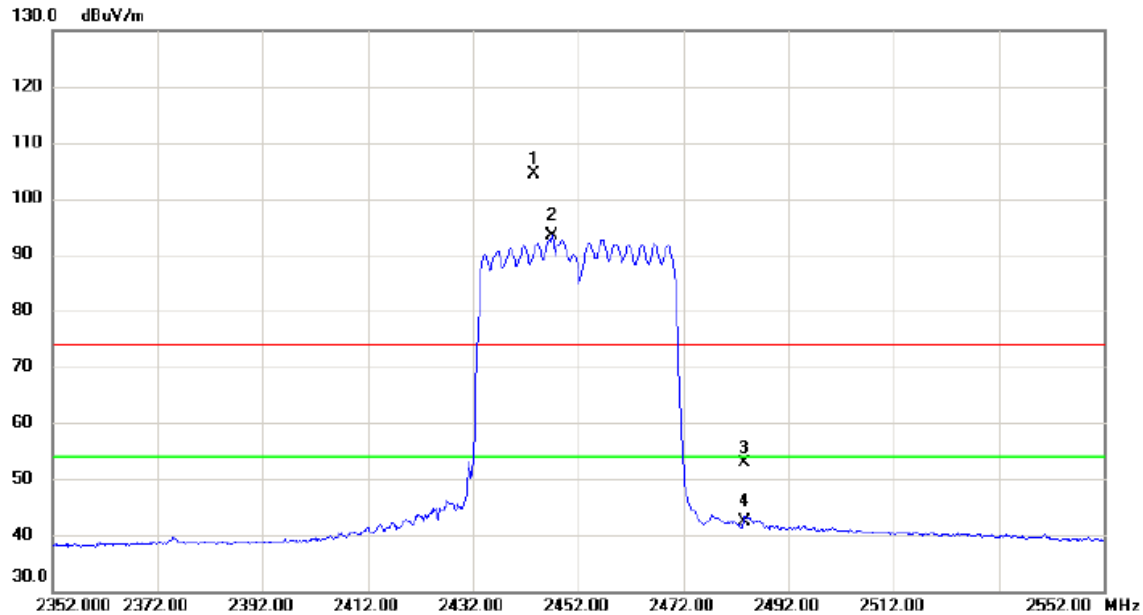

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2443.600	94.21	10.15	104.36	74.00	30.36	peak	No Limit
2	*	2447.100	83.22	10.16	93.38	54.00	39.38	AVG	No Limit
3		2483.500	42.53	10.29	52.82	74.00	-21.18	peak	
4		2483.500	32.21	10.29	42.50	54.00	-11.50	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Horizontal

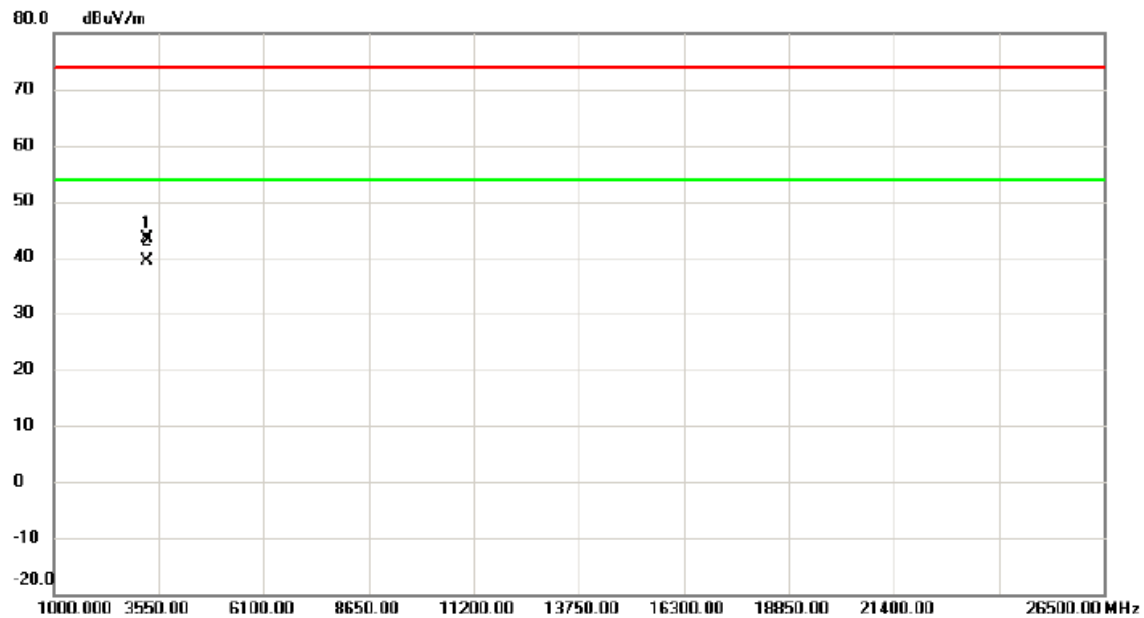


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3269.130	40.28	3.19	43.47	74.00	-30.53	peak	
2	*	3269.380	36.17	3.19	39.36	54.00	-14.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2412 MHz

Vertical

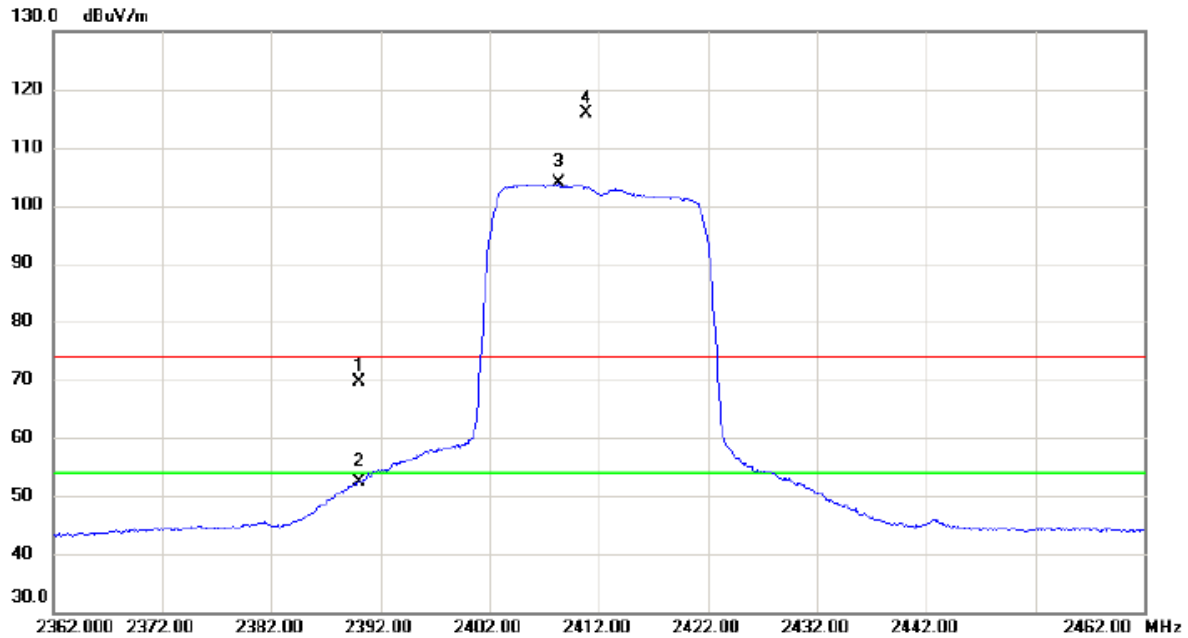

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	59.67	9.95	69.62	74.00	-4.38	peak	
2		2390.000	42.41	9.95	52.36	54.00	-1.64	AVG	
3	*	2408.300	93.75	10.01	103.76	54.00	49.76	AVG	No Limit
4	X	2410.850	105.81	10.02	115.83	74.00	41.83	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2412 MHz

Vertical

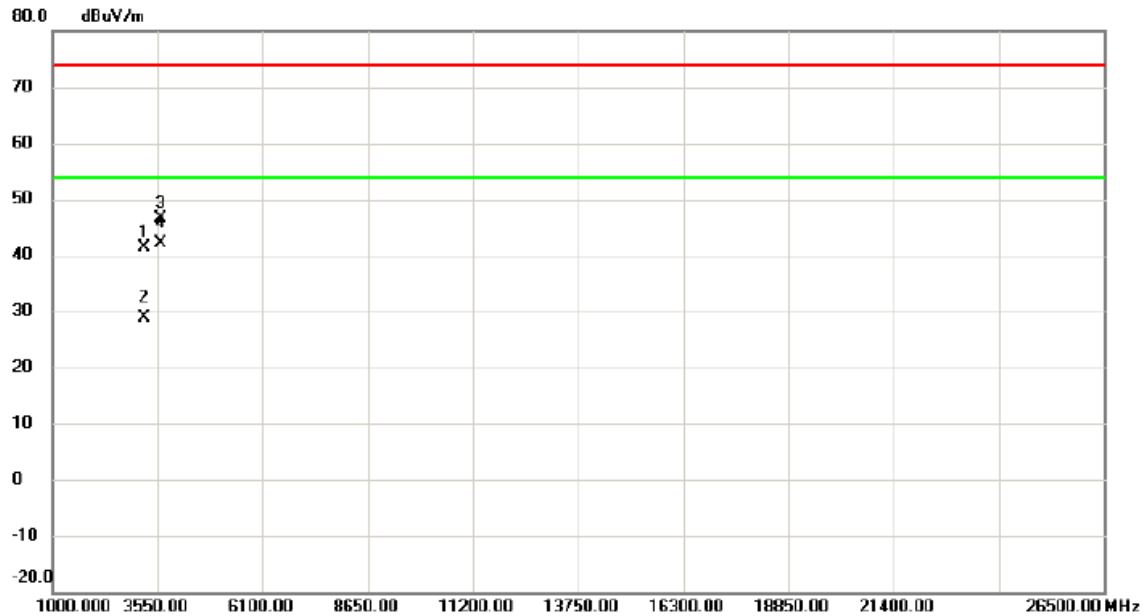

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3214.517	38.39	3.09	41.48	74.00	-32.52	peak	
2		3217.180	25.73	3.09	28.82	54.00	-25.18	AVG	
3		3618.000	42.88	3.75	46.63	74.00	-27.37	peak	
4 *		3618.000	38.49	3.75	42.24	54.00	-11.76	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2412 MHz

Horizontal

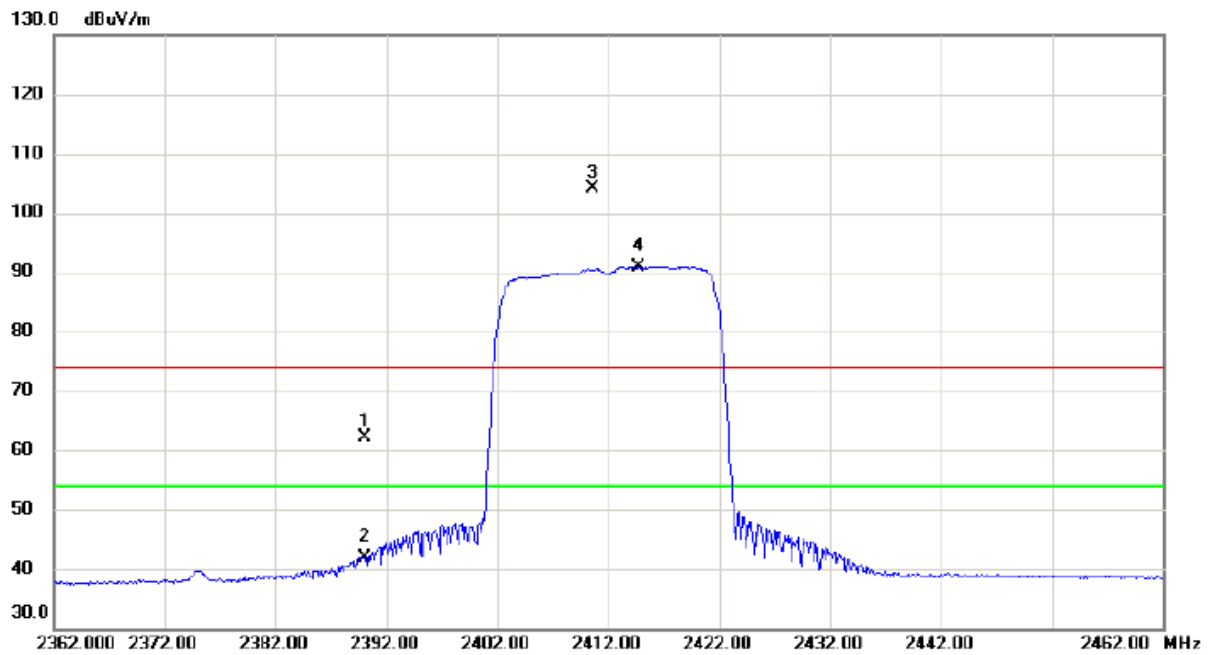

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	52.08	9.95	62.03	74.00	-11.97	peak	
2		2390.000	31.93	9.95	41.88	54.00	-12.12	AVG	
3	X	2410.650	94.06	10.02	104.08	74.00	30.08	peak	No Limit
4	*	2414.700	80.92	10.04	90.96	54.00	36.96	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2412 MHz

Horizontal

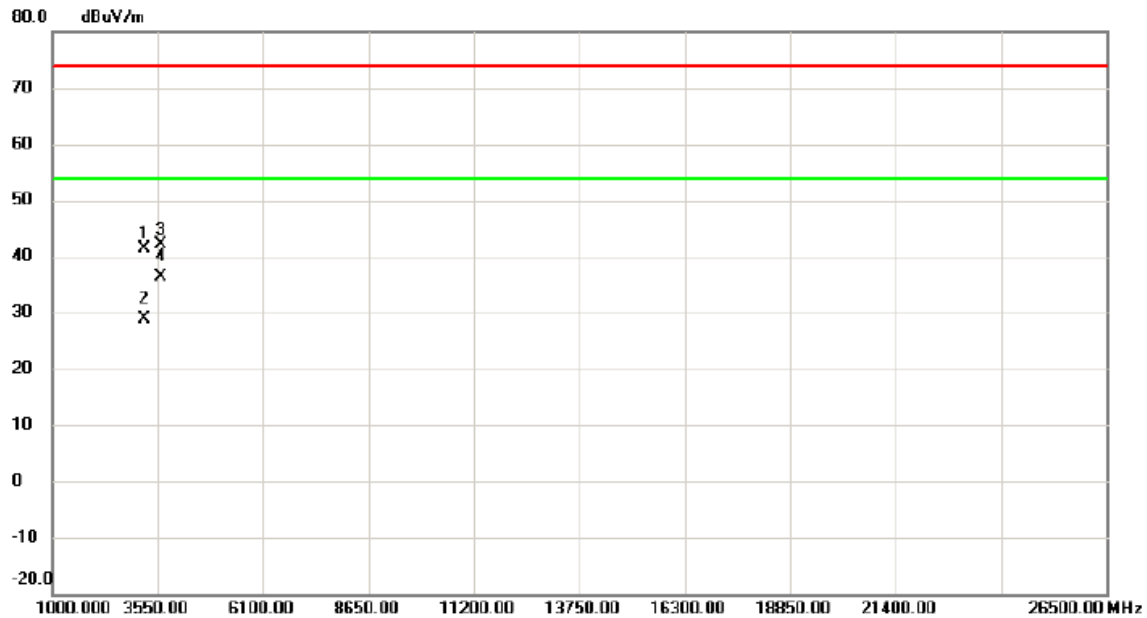

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3214.093	38.30	3.09	41.39	74.00	-32.61	peak	
2		3217.177	25.81	3.09	28.90	54.00	-25.10	AVG	
3		3618.000	38.37	3.75	42.12	74.00	-31.88	peak	
4 *		3618.000	32.73	3.75	36.48	54.00	-17.52	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2417 MHz

Vertical

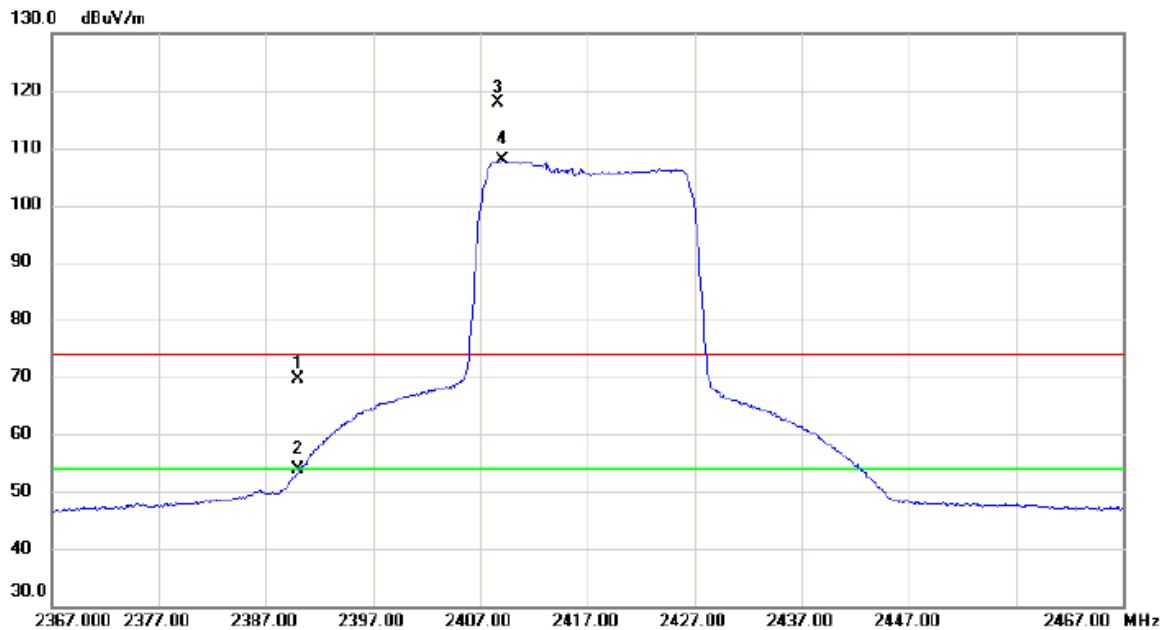

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	59.72	9.95	69.67	74.00	-4.33	peak	
2		2390.000	43.91	9.95	53.86	54.00	-0.14	AVG	
3	X	2408.650	107.97	10.01	117.98	74.00	43.98	peak	No Limit
4	*	2409.050	97.88	10.01	107.89	54.00	53.89	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2417 MHz

Vertical

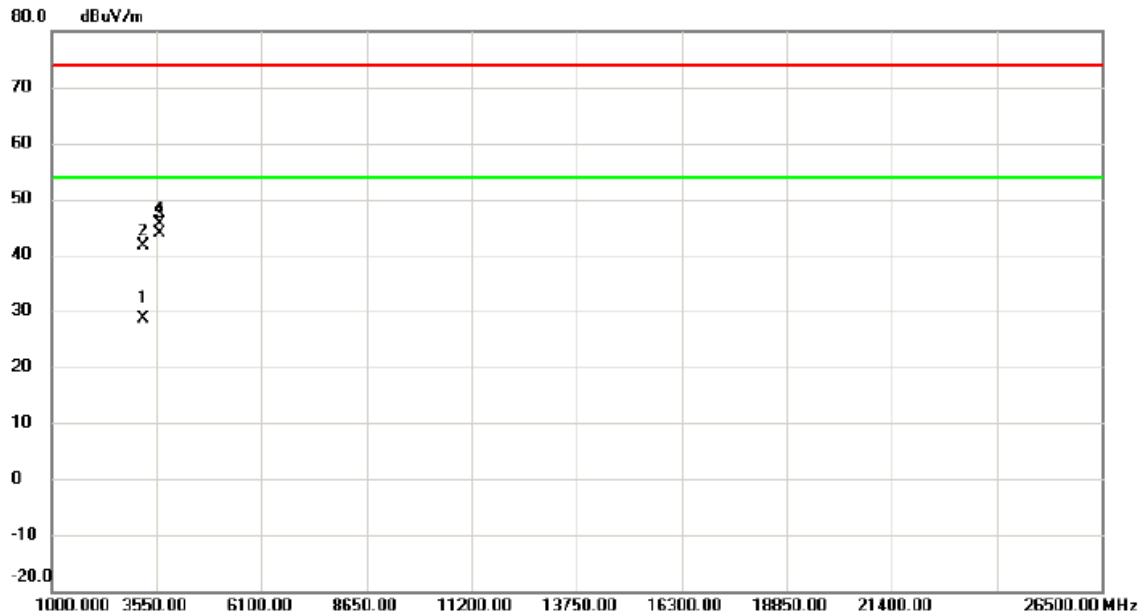

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3220.615	25.60	3.10	28.70	54.00	-25.30	AVG	
2		3221.875	38.49	3.10	41.59	74.00	-32.41	peak	
3	*	3625.500	40.16	3.76	43.92	54.00	-10.08	AVG	
4		3626.000	41.99	3.76	45.75	74.00	-28.25	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2417 MHz

Horizontal

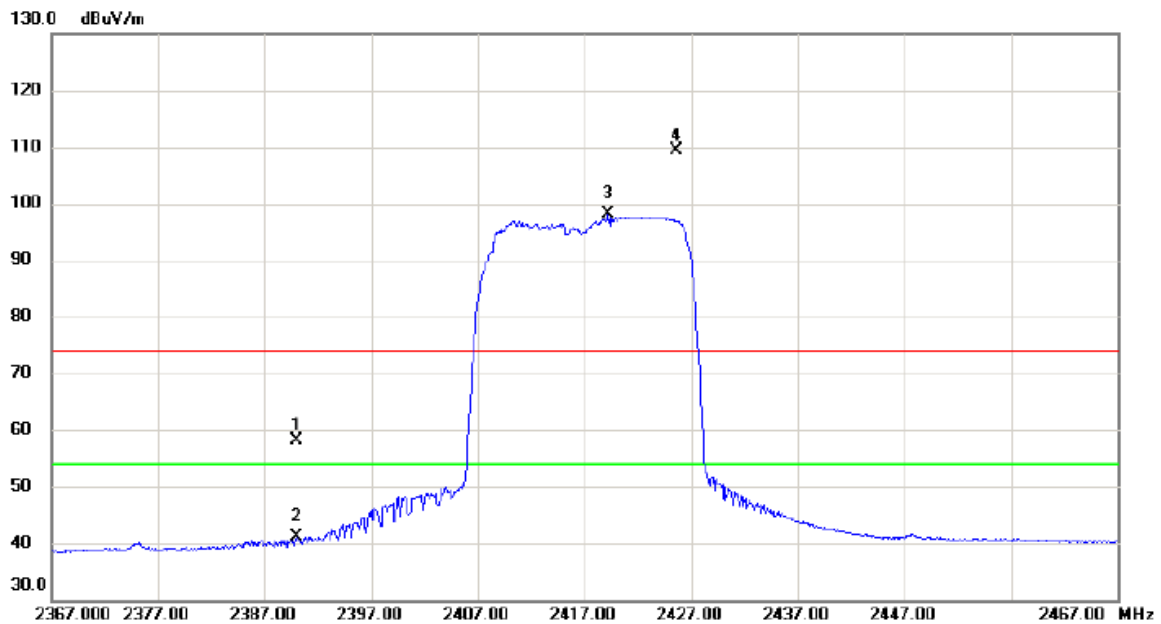

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	48.29	9.95	58.24	74.00	-15.76	peak	
2		2390.000	31.16	9.95	41.11	54.00	-12.89	AVG	
3	*	2419.150	87.97	10.06	98.03	54.00	44.03	AVG	No Limit
4	X	2425.600	99.21	10.08	109.29	74.00	35.29	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2417 MHz

Horizontal

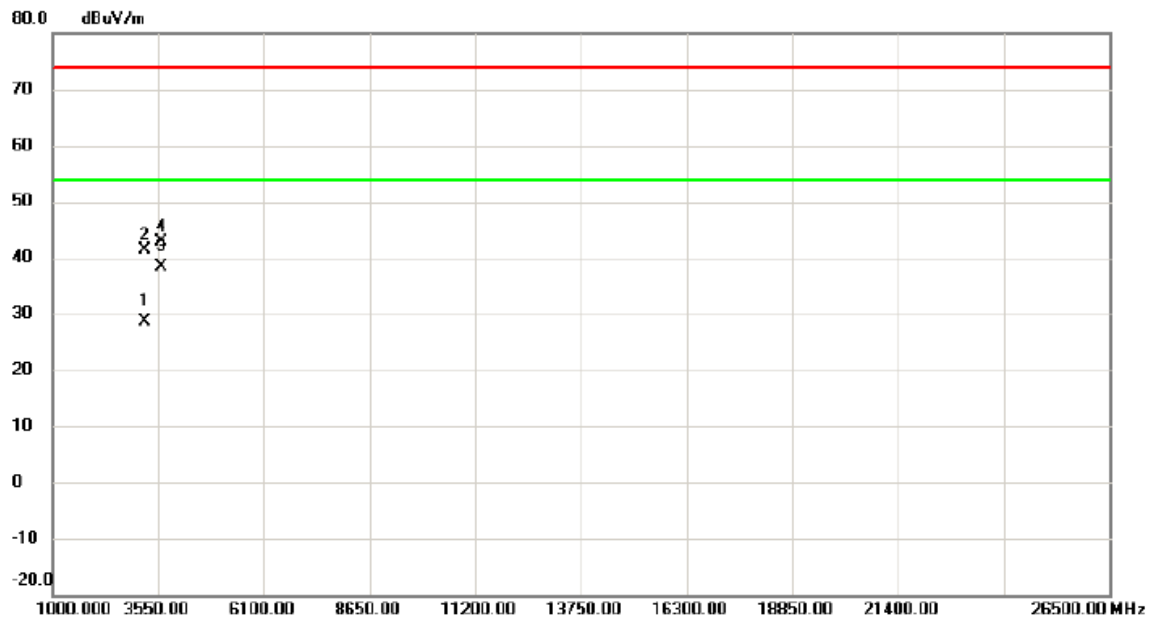

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3220.495	25.55	3.10	28.65	54.00	-25.35	AVG	
2		3220.945	38.24	3.10	41.34	74.00	-32.66	peak	
3	*	3625.160	34.58	3.76	38.34	54.00	-15.66	AVG	
4		3625.660	39.04	3.76	42.80	74.00	-31.20	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz

Vertical

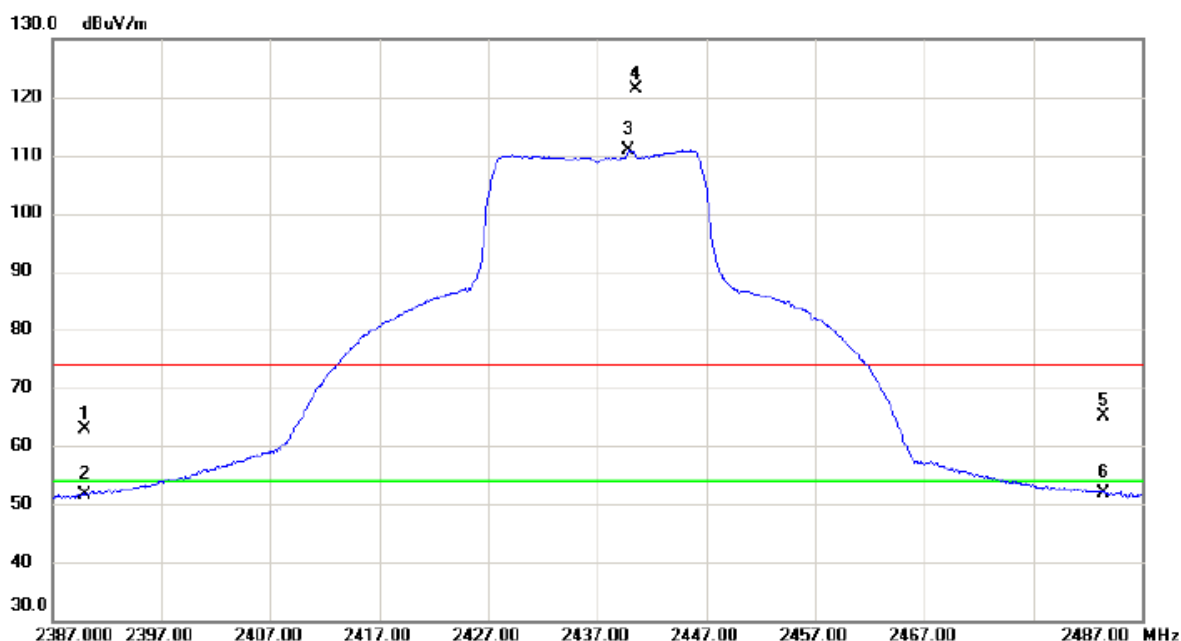

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	52.86	9.95	62.81	74.00	-11.19	peak	
2		2390.000	41.75	9.95	51.70	54.00	-2.30	AVG	
3	*	2439.900	100.69	10.14	110.83	54.00	56.83	AVG	No Limit
4	X	2440.500	111.16	10.14	121.30	74.00	47.30	peak	No Limit
5		2483.500	54.91	10.29	65.20	74.00	-8.80	peak	
6		2483.500	41.61	10.29	51.90	54.00	-2.10	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz

Vertical

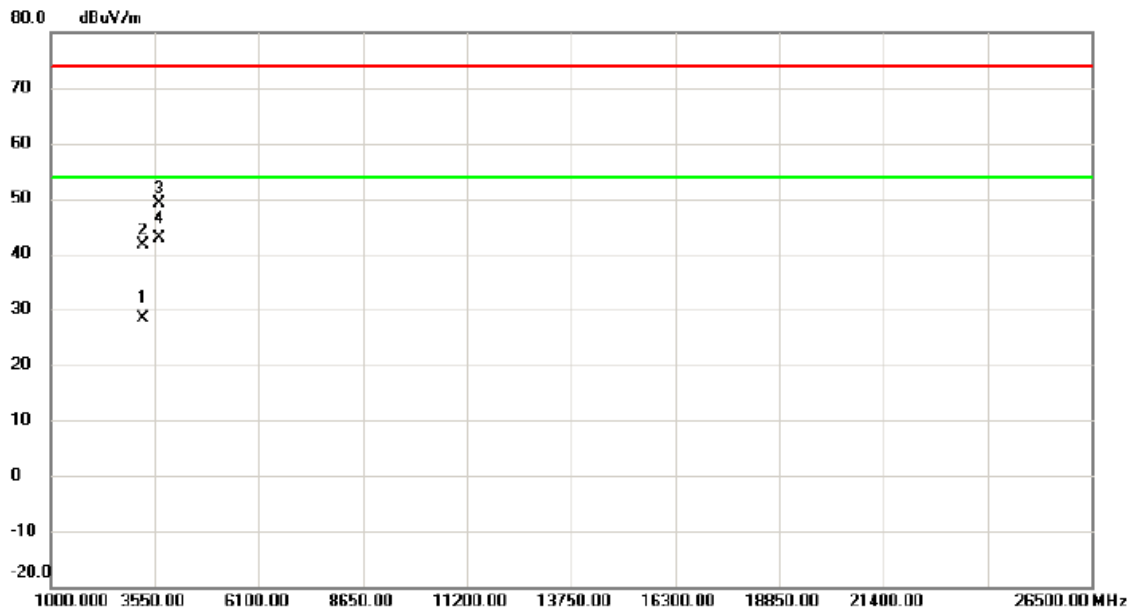

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3249.961	25.30	3.15	28.45	54.00	-25.55	AVG	
2		3250.298	38.53	3.15	41.68	74.00	-32.32	peak	
3		3655.330	45.33	3.80	49.13	74.00	-24.87	peak	
4	*	3655.333	39.00	3.80	42.80	54.00	-11.20	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz

Horizontal

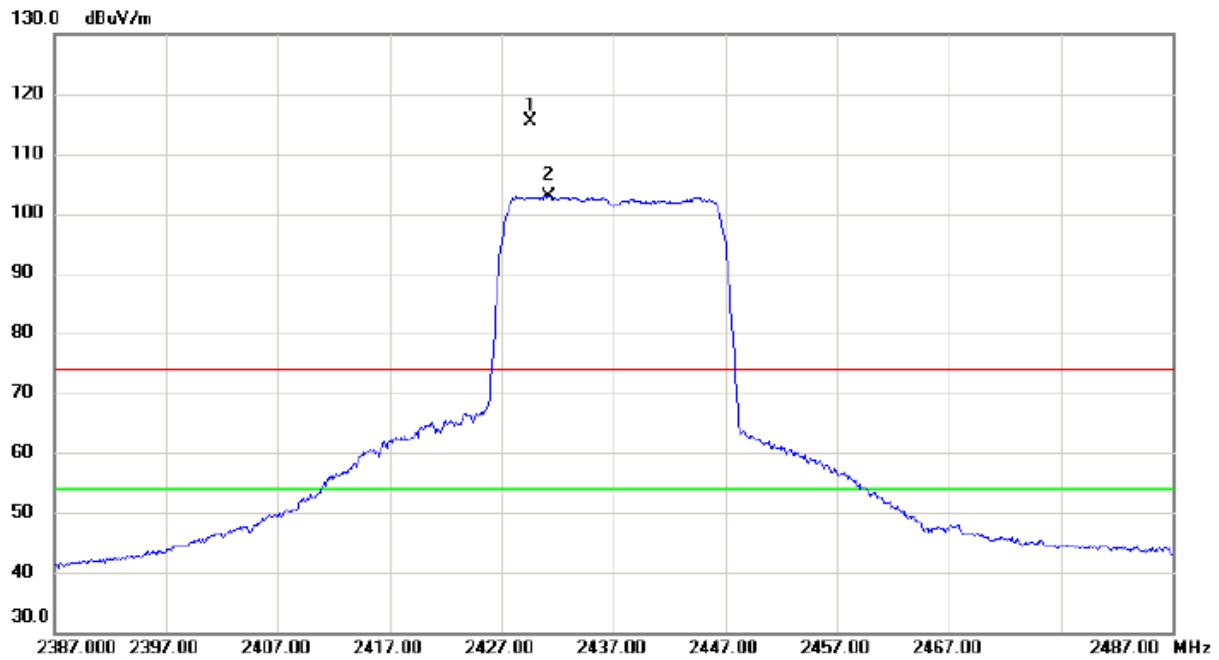

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2429.650	105.33	10.10	115.43	74.00	41.43	peak	No Limit
2	*	2431.250	92.77	10.10	102.87	54.00	48.87	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2437 MHz

Horizontal

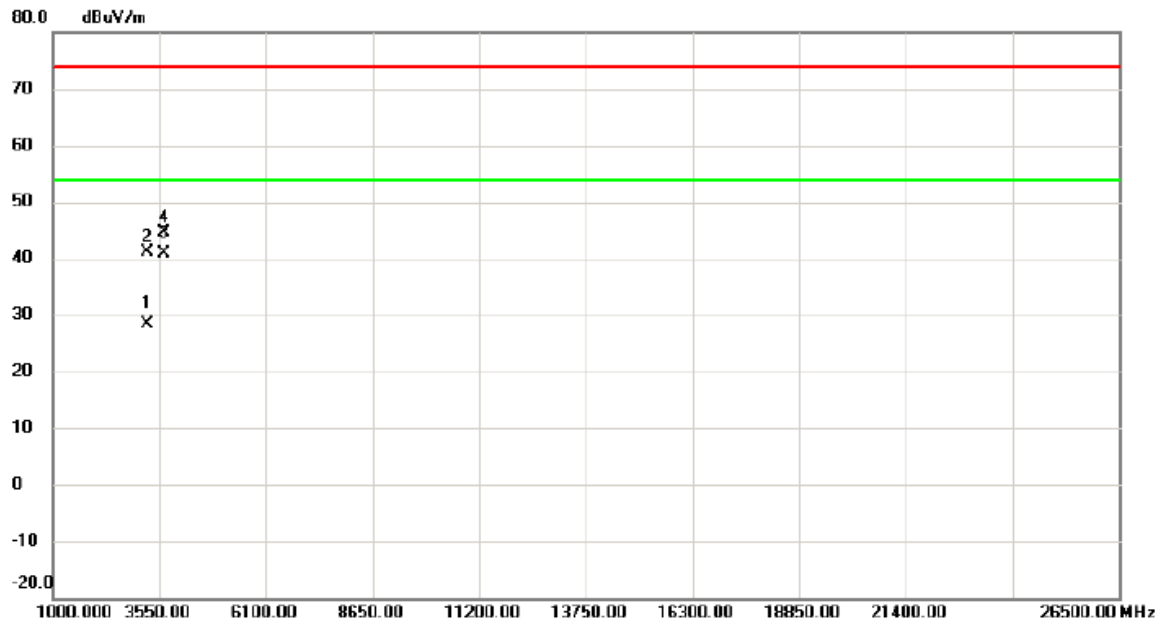

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3250.200	25.15	3.15	28.30	54.00	-25.70	AVG	
2		3250.675	37.93	3.15	41.08	74.00	-32.92	peak	
3	*	3655.330	36.97	3.80	40.77	54.00	-13.23	AVG	
4		3655.830	40.85	3.80	44.65	74.00	-29.35	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2457 MHz

Vertical

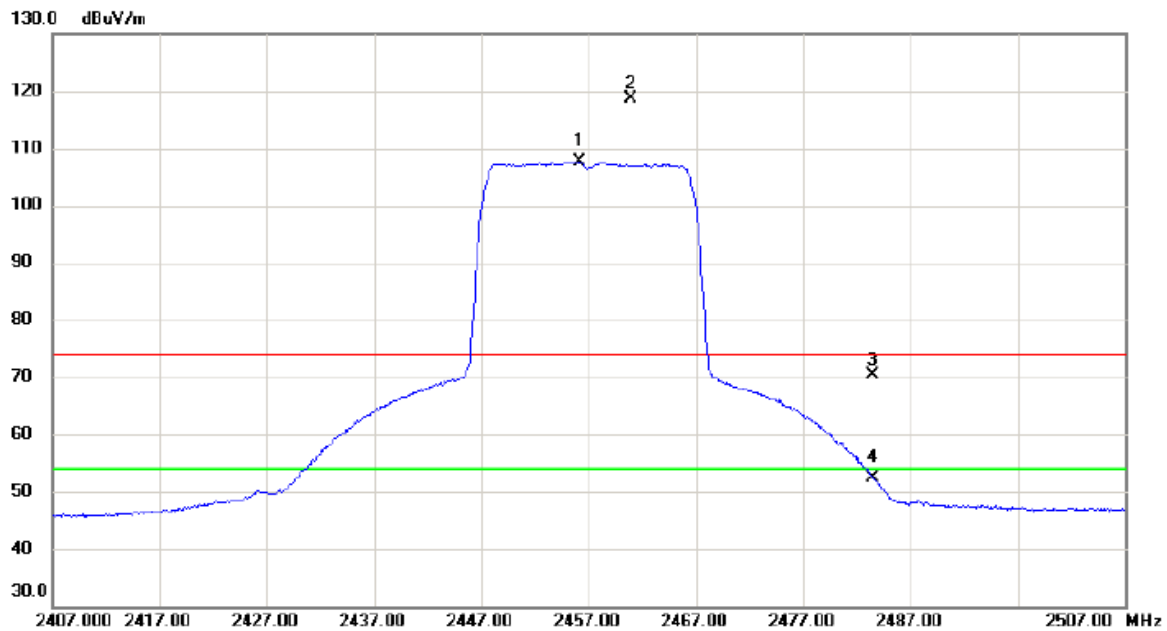

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2456.100	97.47	10.19	107.66	54.00	53.66	AVG	No Limit
2	X	2460.950	108.51	10.20	118.71	74.00	44.71	peak	No Limit
3		2483.500	60.10	10.29	70.39	74.00	-3.61	peak	
4		2483.500	42.20	10.29	52.49	54.00	-1.51	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2457 MHz

Vertical

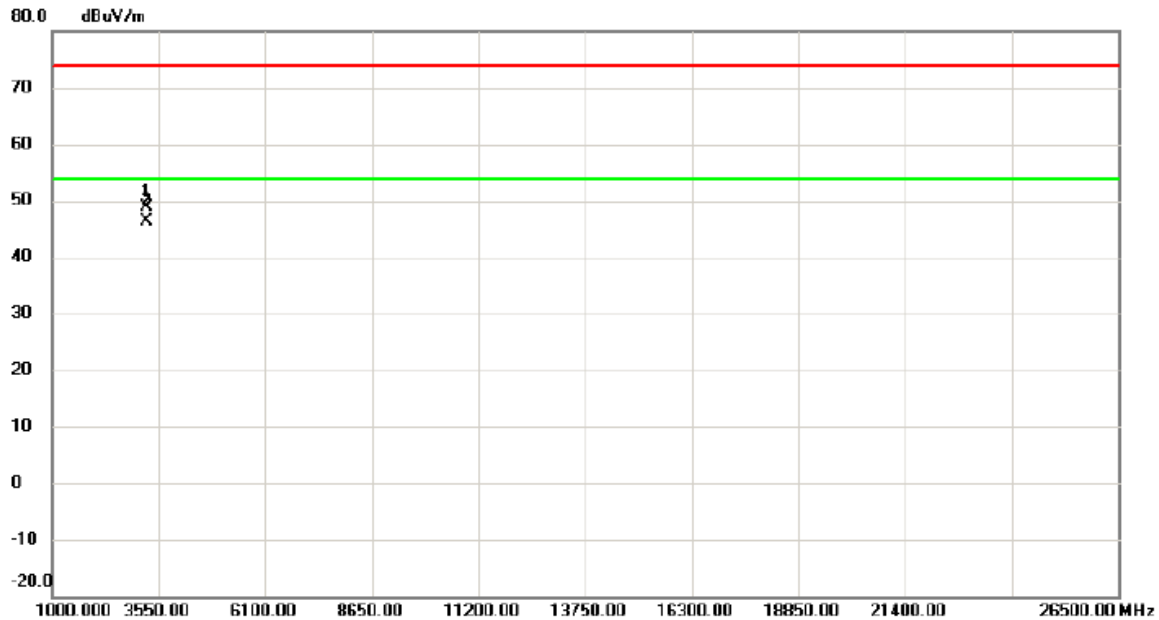


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3276.083	45.69	3.20	48.89	74.00	-25.11	peak	
2	*	3276.083	43.28	3.20	46.48	54.00	-7.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2457 MHz

Horizontal

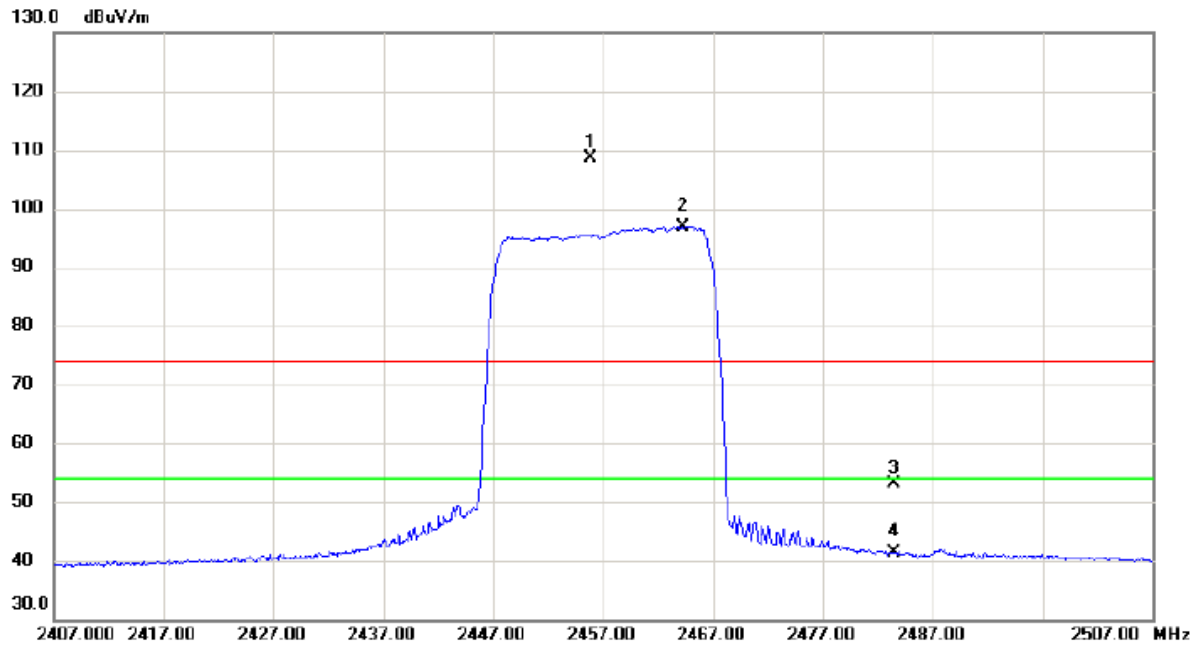


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2455.850	98.50	10.19	108.69	74.00	34.69	peak	No Limit
2	*	2464.250	86.76	10.23	96.99	54.00	42.99	AVG	No Limit
3		2483.500	42.80	10.29	53.09	74.00	-20.91	peak	
4		2483.500	31.07	10.29	41.36	54.00	-12.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2457 MHz

Horizontal

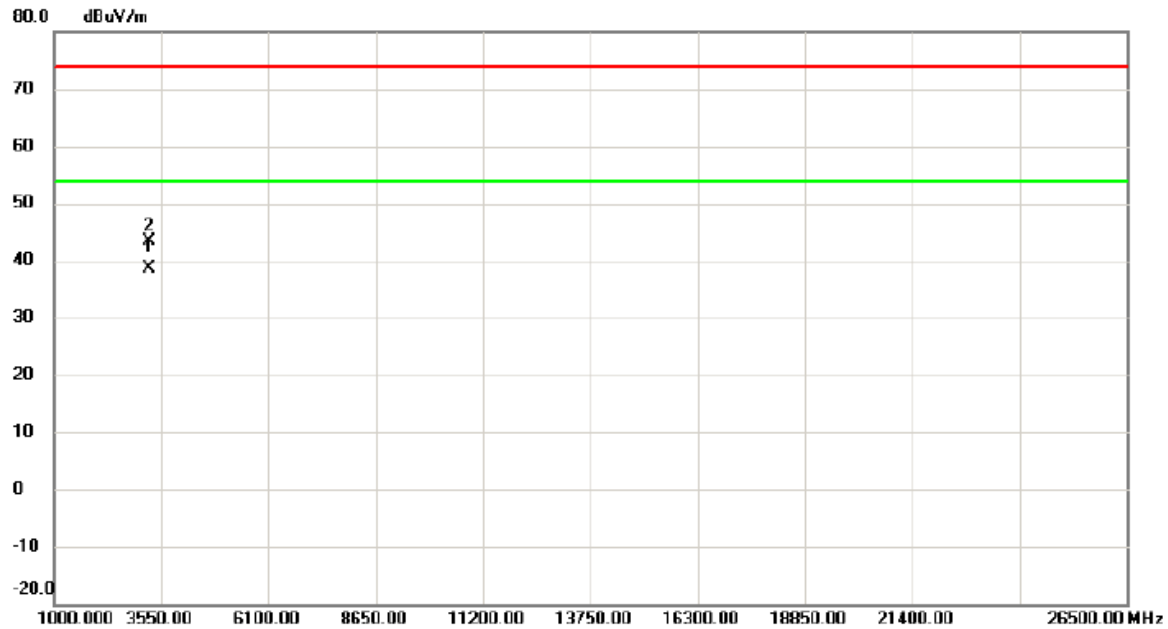

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	3275.980	35.44	3.20	38.64	54.00	-15.36	AVG	
2		3276.130	40.17	3.20	43.37	74.00	-30.63	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2462 MHz

Vertical

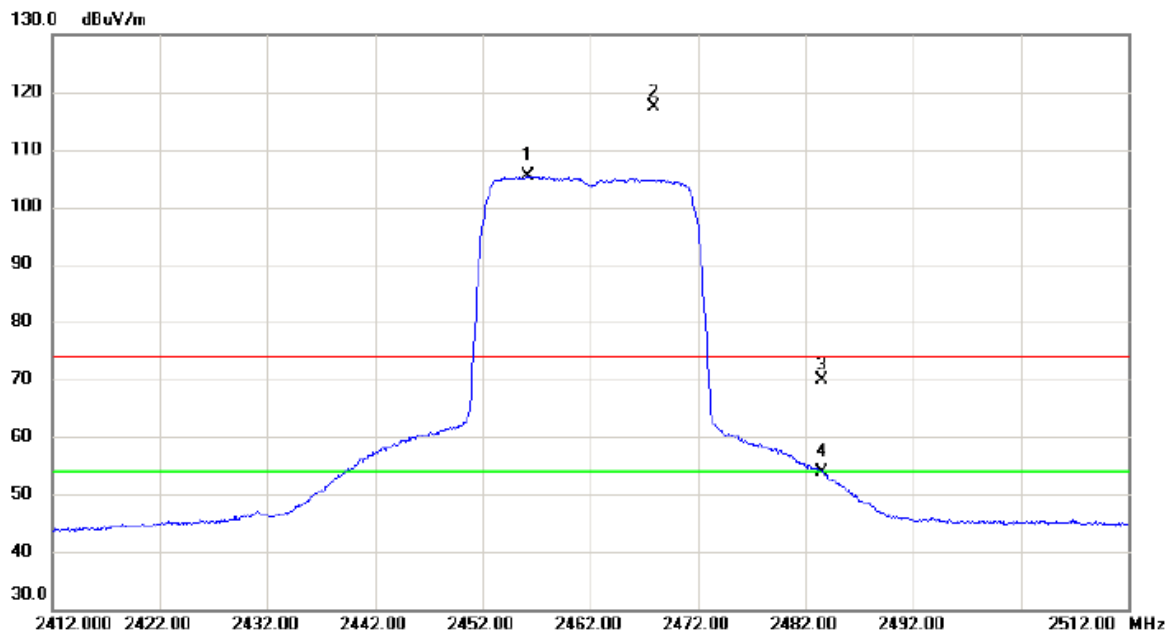


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2456.200	95.11	10.19	105.30	54.00	51.30	AVG	No Limit
2	X	2467.950	107.13	10.24	117.37	74.00	43.37	peak	No Limit
3		2483.500	59.47	10.29	69.76	74.00	-4.24	peak	
4		2483.500	43.53	10.29	53.82	54.00	-0.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2462 MHz

Vertical

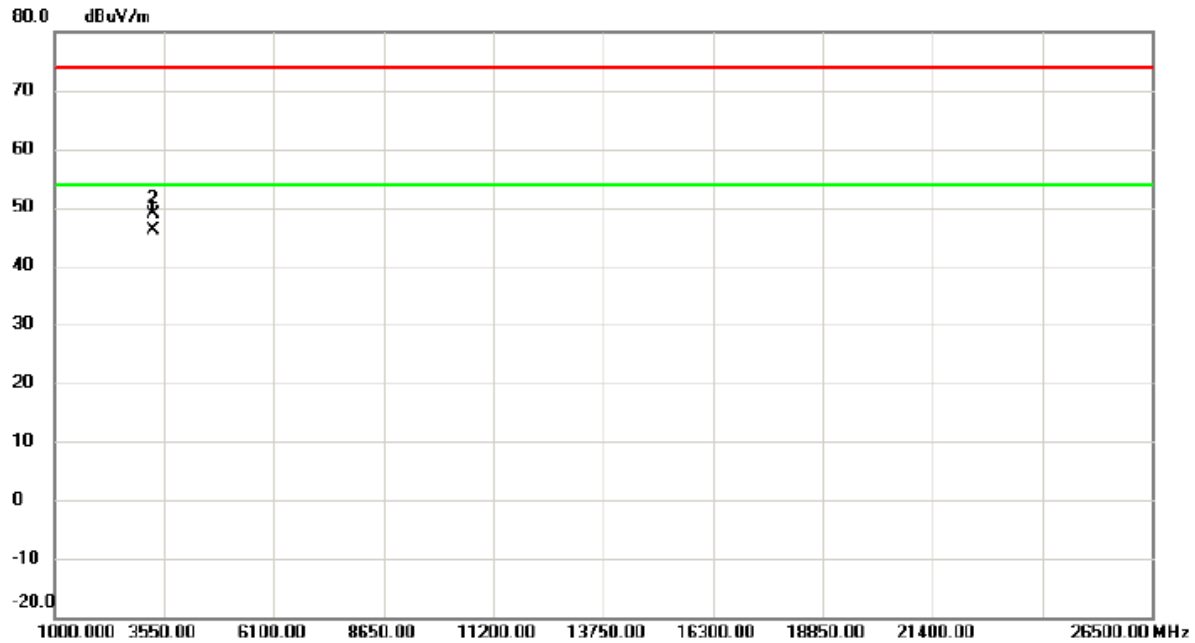


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	3282.733	43.04	3.21	46.25	54.00	-7.75	AVG	
2		3282.783	45.78	3.21	48.99	74.00	-25.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2462 MHz

Horizontal

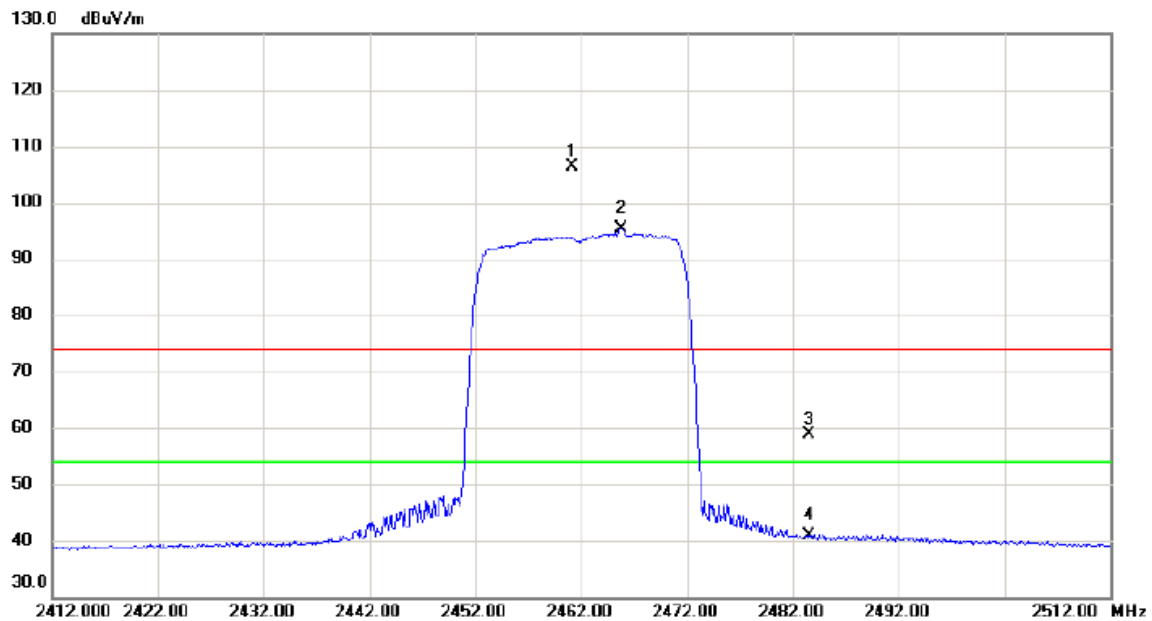

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2461.100	96.18	10.20	106.38	74.00	32.38	peak	No Limit
2	*	2465.750	85.16	10.23	95.39	54.00	41.39	AVG	No Limit
3		2483.500	48.52	10.29	58.81	74.00	-15.19	peak	
4		2483.500	30.51	10.29	40.80	54.00	-13.20	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2462 MHz

Horizontal

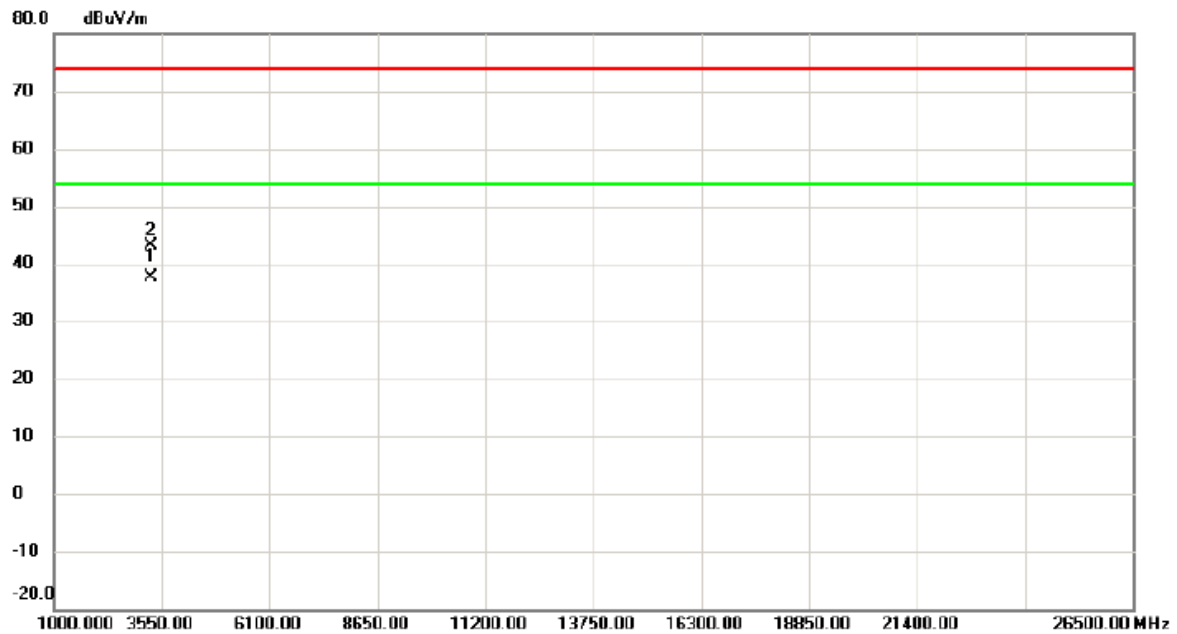


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	3282.730	34.41	3.21	37.62	54.00	-16.38	AVG	
2		3282.830	39.85	3.21	43.06	74.00	-30.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422 MHz

Vertical

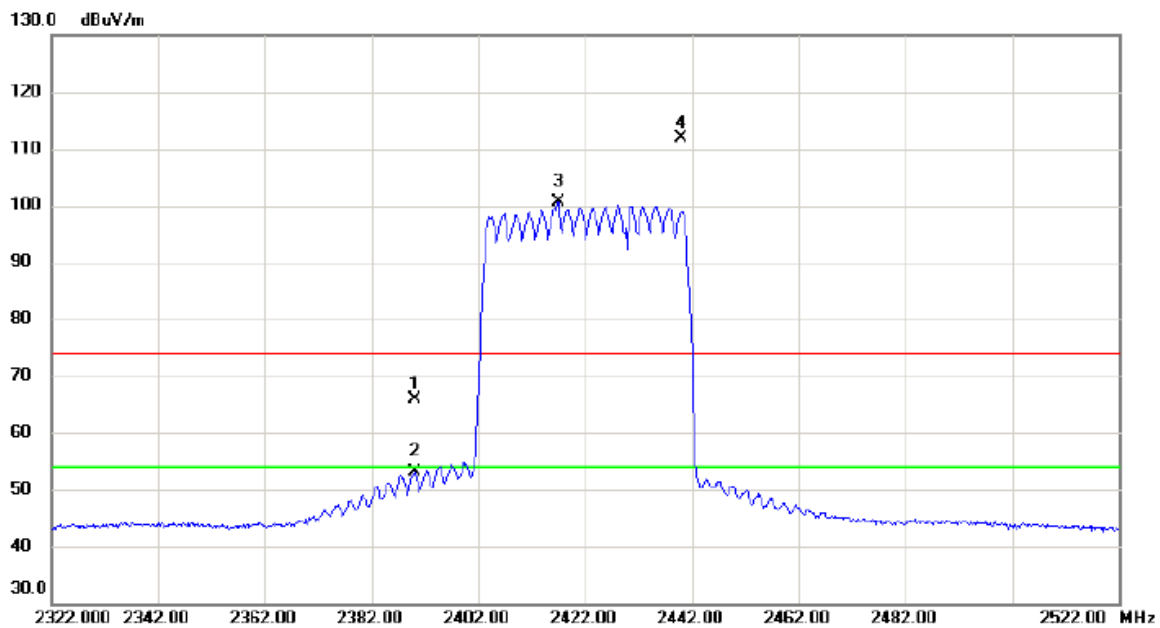

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	55.98	9.95	65.93	74.00	-8.07	peak	
2		2390.000	43.11	9.95	53.06	54.00	-0.94	AVG	
3	*	2417.000	90.56	10.05	100.61	54.00	46.61	AVG	No Limit
4	X	2440.000	101.72	10.14	111.86	74.00	37.86	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422 MHz

Vertical

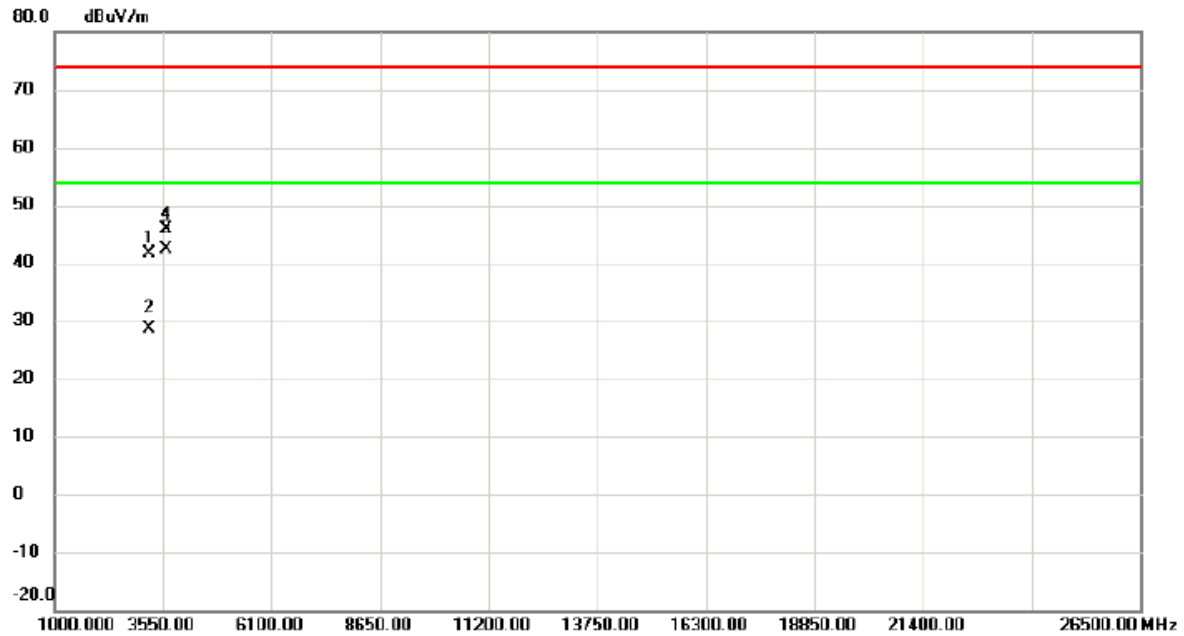


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3228.125	38.53	3.11	41.64	74.00	-32.36	peak	
2		3231.468	25.56	3.12	28.68	54.00	-25.32	AVG	
3	*	3632.830	38.68	3.76	42.44	54.00	-11.56	AVG	
4		3633.330	42.22	3.76	45.98	74.00	-28.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422 MHz

Horizontal

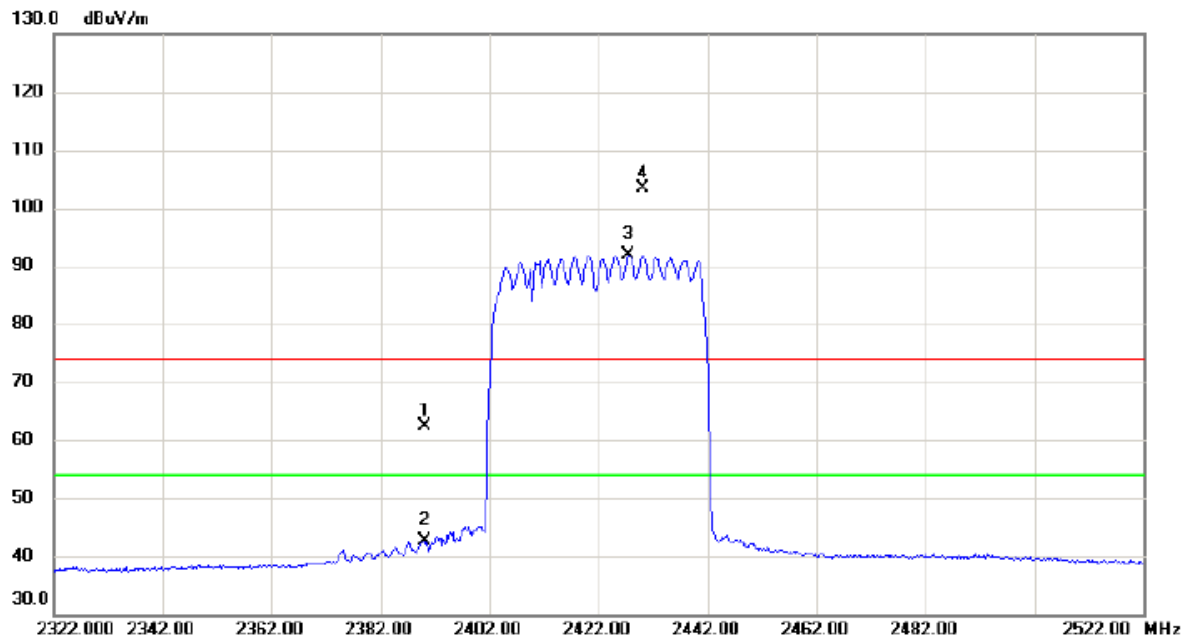


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	52.35	9.95	62.30	74.00	-11.70	peak	
2		2390.000	32.68	9.95	42.63	54.00	-11.37	AVG	
3	*	2427.600	81.75	10.09	91.84	54.00	37.84	AVG	No Limit
4	X	2430.000	93.32	10.10	103.42	74.00	29.42	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2422 MHz

Horizontal

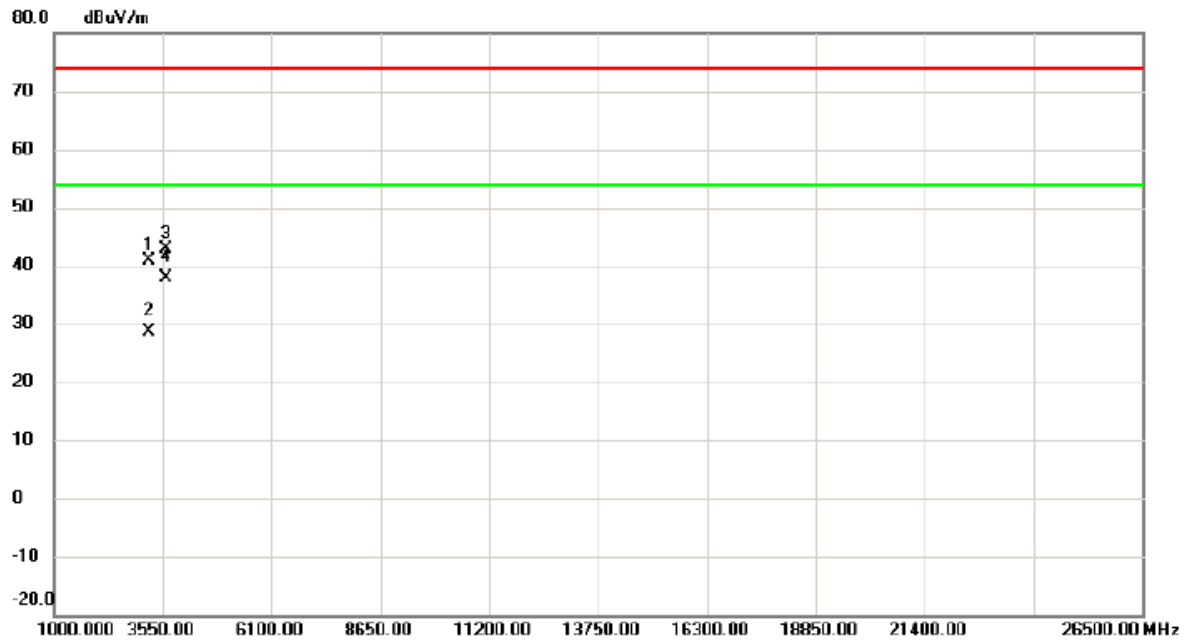


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3230.010	37.69	3.11	40.80	74.00	-33.20	peak	
2		3231.015	25.41	3.11	28.52	54.00	-25.48	AVG	
3		3632.830	39.01	3.76	42.77	74.00	-31.23	peak	
4	*	3632.830	34.06	3.76	37.82	54.00	-16.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427 MHz

Vertical

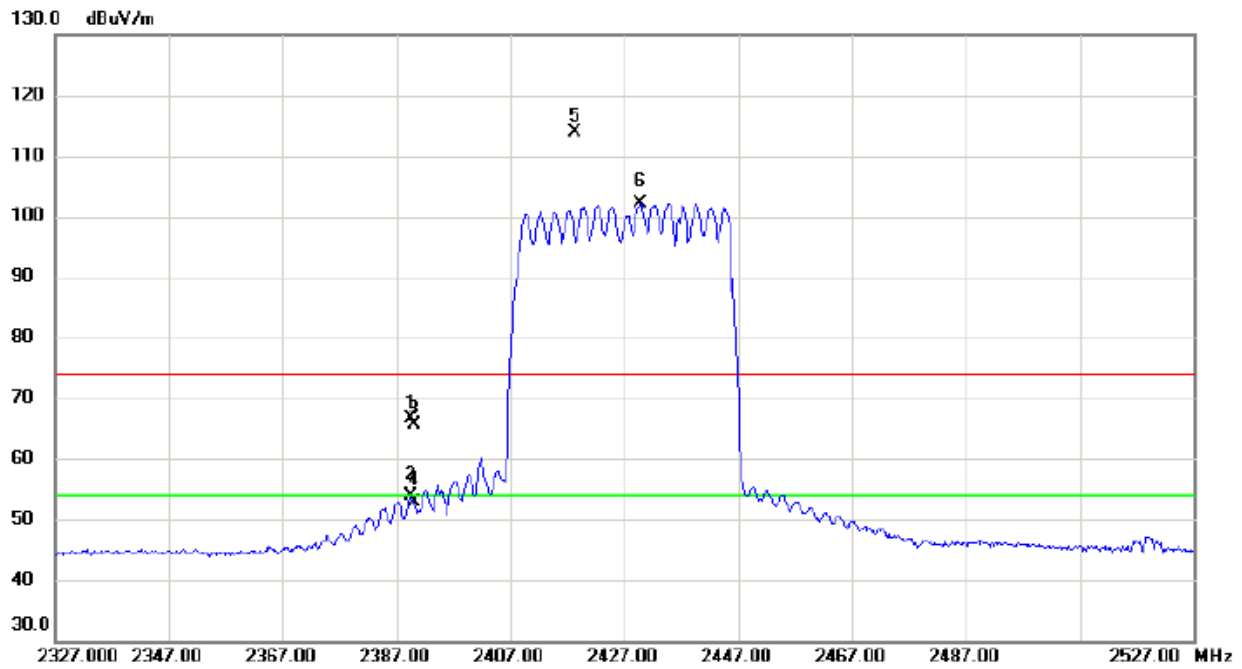


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2389.600	56.69	9.95	66.64	74.00	-7.36	peak	
2		2389.600	43.97	9.95	53.92	54.00	-0.08	AVG	
3		2390.000	55.69	9.95	65.64	74.00	-8.36	peak	
4		2390.000	42.91	9.95	52.86	54.00	-1.14	AVG	
5	X	2418.300	103.89	10.06	113.95	74.00	39.95	peak	No Limit
6	*	2429.800	92.11	10.10	102.21	54.00	48.21	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427 MHz

Vertical

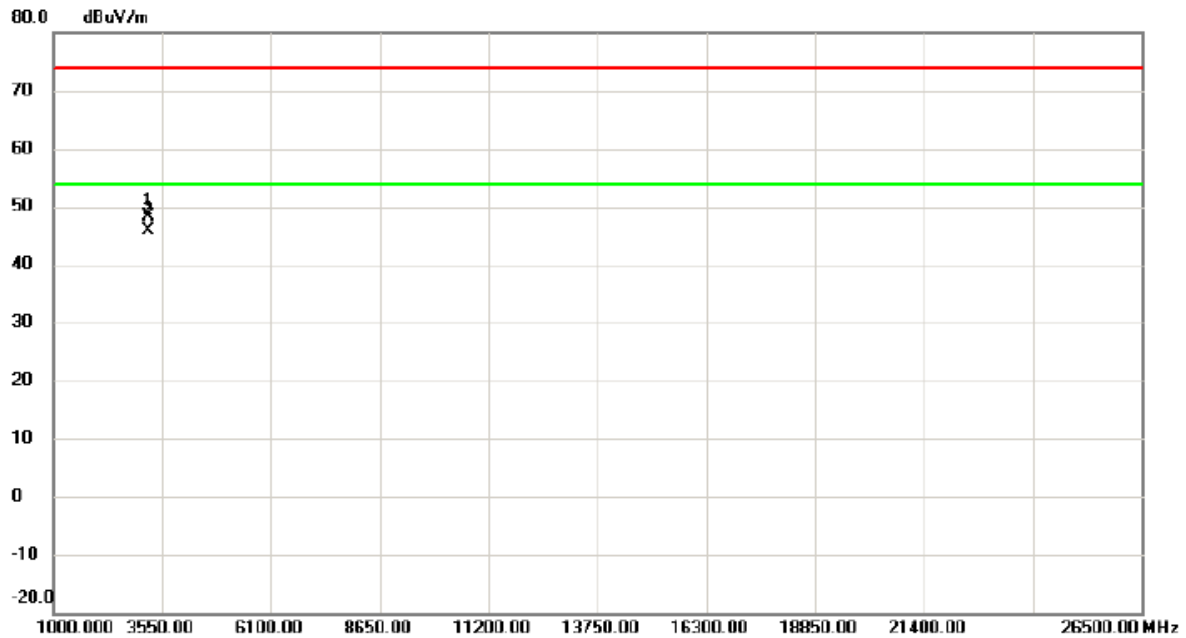


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3236.080	45.23	3.12	48.35	74.00	-25.65	peak	
2	*	3236.080	42.79	3.12	45.91	54.00	-8.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427 MHz

Horizontal

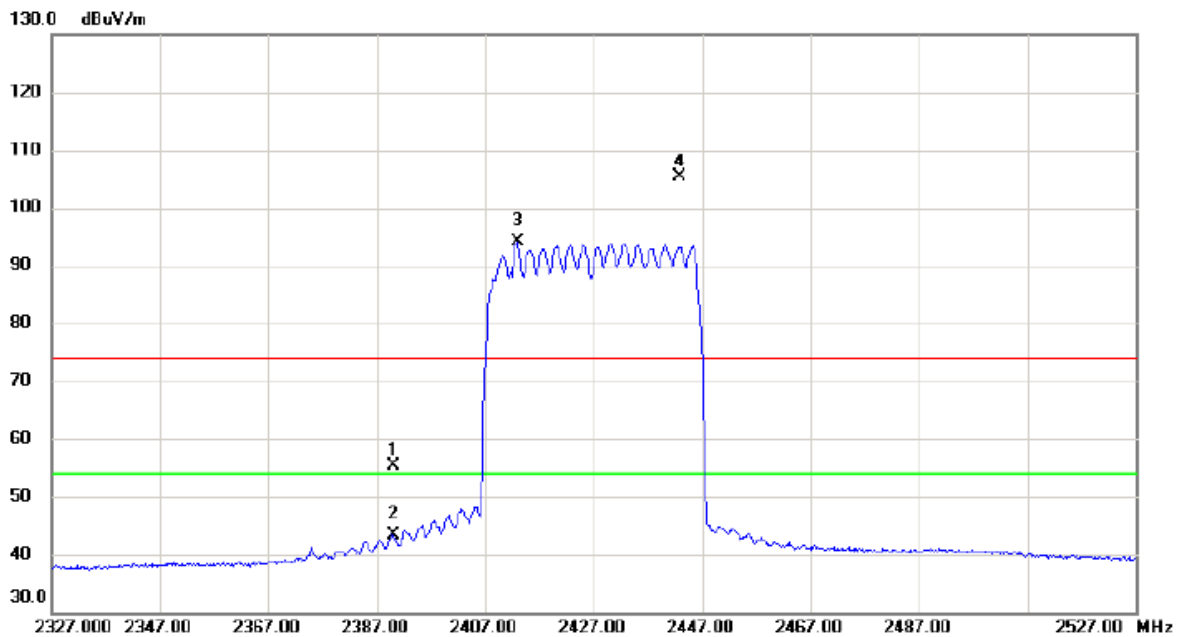

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	45.47	9.95	55.42	74.00	-18.58	peak	
2		2390.000	33.43	9.95	43.38	54.00	-10.62	AVG	
3	*	2413.000	84.09	10.04	94.13	54.00	40.13	AVG	No Limit
4	X	2442.900	95.35	10.14	105.49	74.00	31.49	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427 MHz

Horizontal

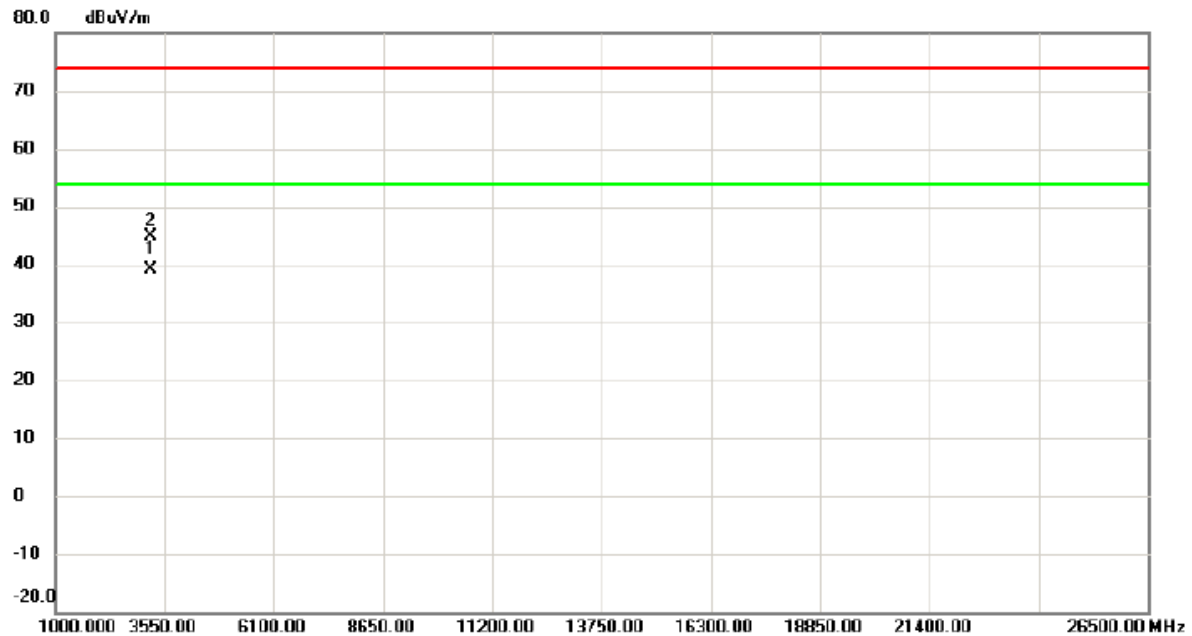

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	3236.030	36.12	3.12	39.24	54.00	-14.76	AVG	
2		3236.080	41.67	3.12	44.79	74.00	-29.21	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz

Vertical

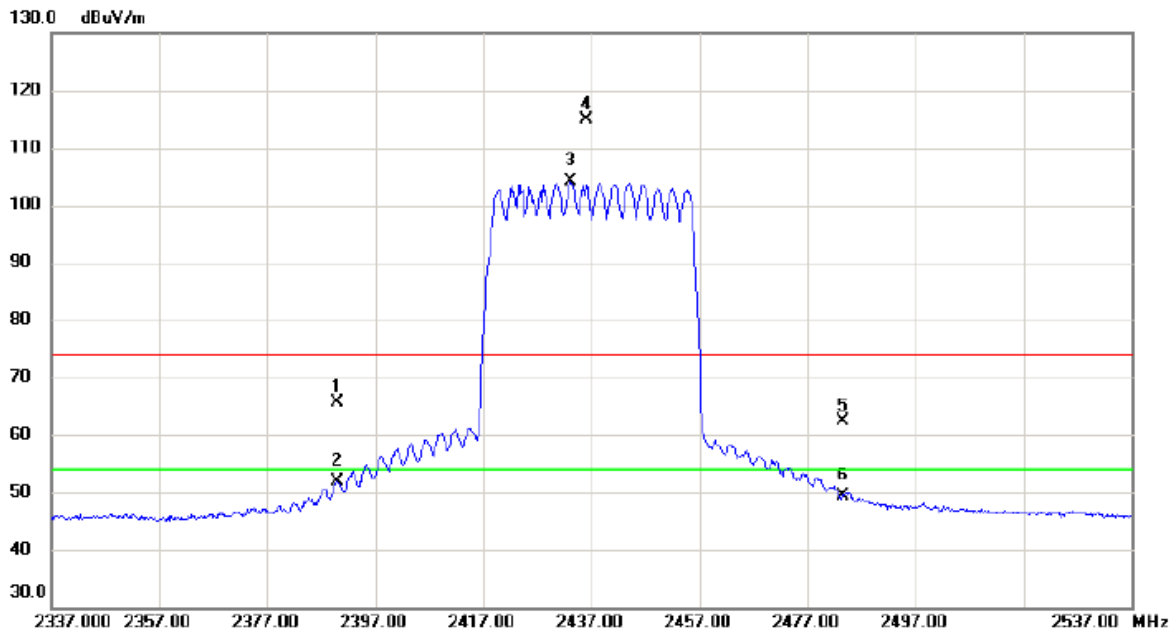

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	55.62	9.95	65.57	74.00	-8.43	peak	
2		2390.000	41.82	9.95	51.77	54.00	-2.23	AVG	
3	*	2433.200	94.00	10.10	104.10	54.00	50.10	AVG	No Limit
4	X	2436.200	104.86	10.12	114.98	74.00	40.98	peak	No Limit
5		2483.500	52.13	10.29	62.42	74.00	-11.58	peak	
6		2483.500	39.13	10.29	49.42	54.00	-4.58	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz

Vertical

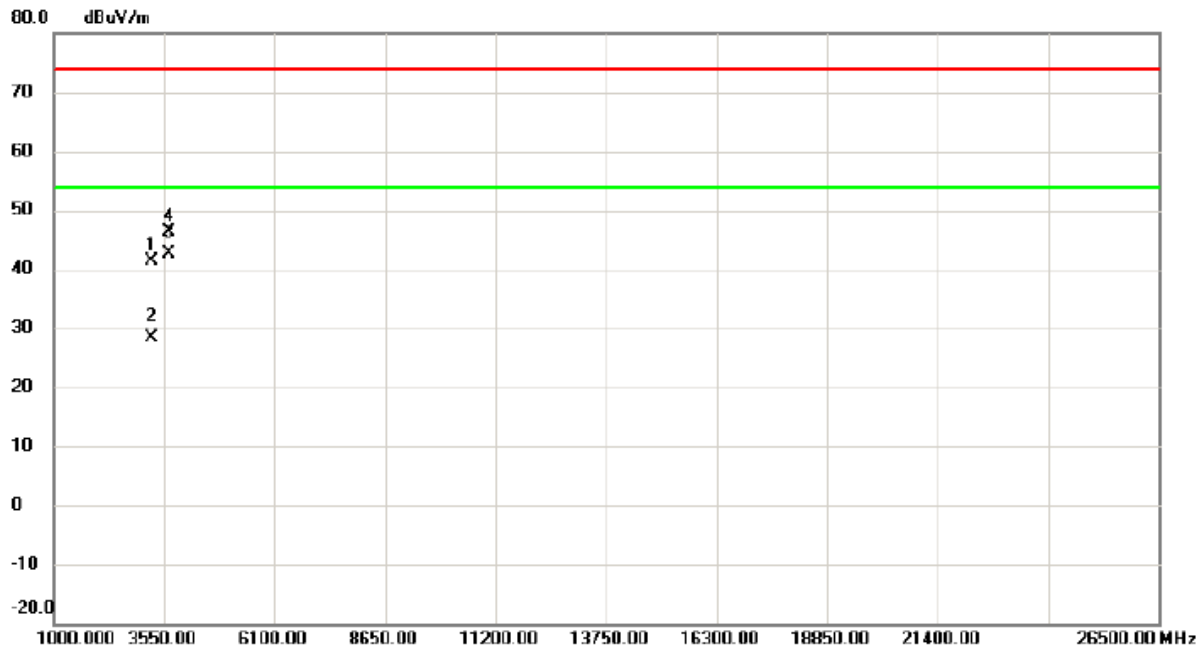


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3247.483	38.22	3.15	41.37	74.00	-32.63	peak	
2		3249.767	25.24	3.15	28.39	54.00	-25.61	AVG	
3	*	3655.330	38.90	3.80	42.70	54.00	-11.30	AVG	
4		3655.830	42.64	3.80	46.44	74.00	-27.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz

Horizontal

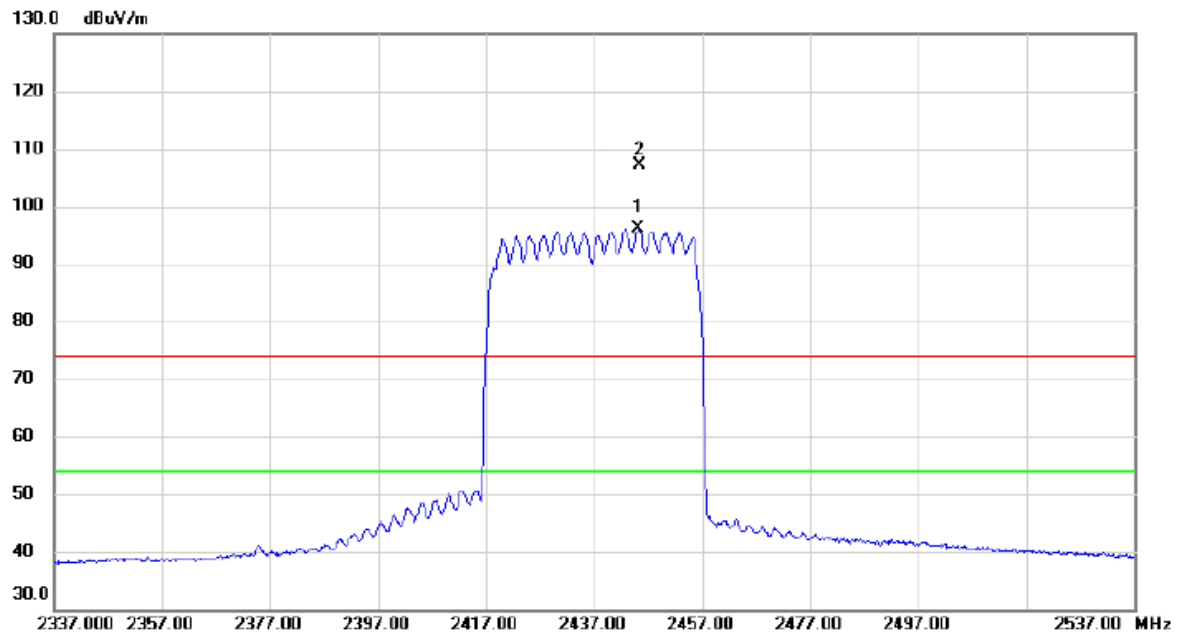


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2445.200	85.93	10.16	96.09	54.00	42.09	AVG	No Limit
2	X	2445.300	97.03	10.16	107.19	74.00	33.19	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2437 MHz

Horizontal

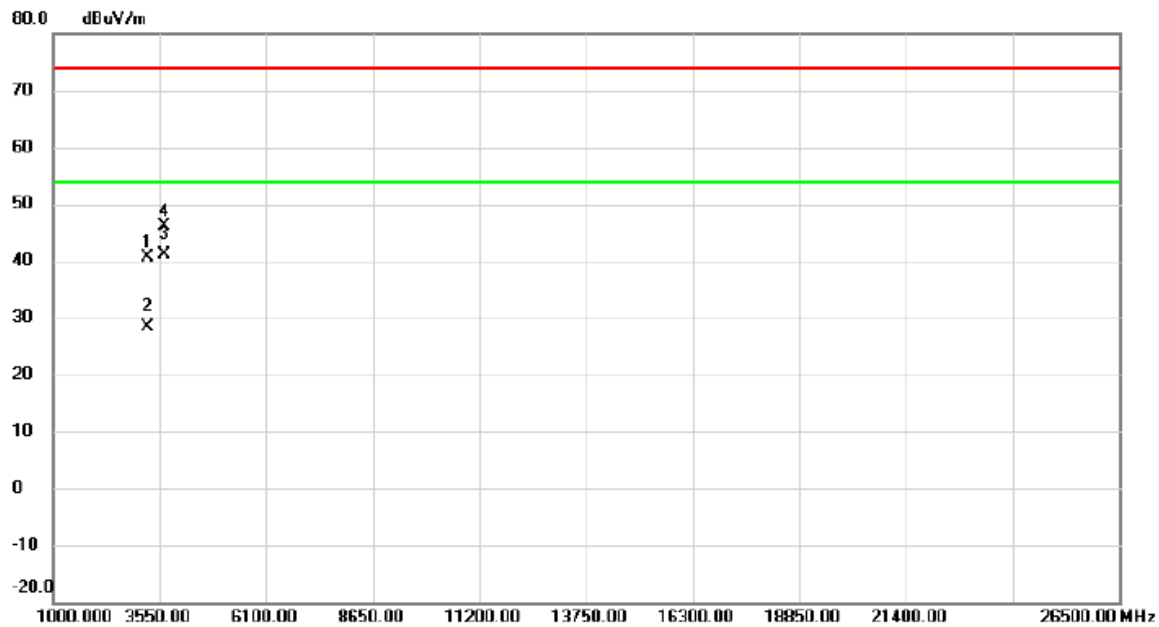

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3247.807	37.51	3.15	40.66	74.00	-33.34	peak	
2		3250.247	25.22	3.15	28.37	54.00	-25.63	AVG	
3	*	3655.330	37.34	3.80	41.14	54.00	-12.86	AVG	
4		3655.830	42.22	3.80	46.02	74.00	-27.98	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz

Vertical

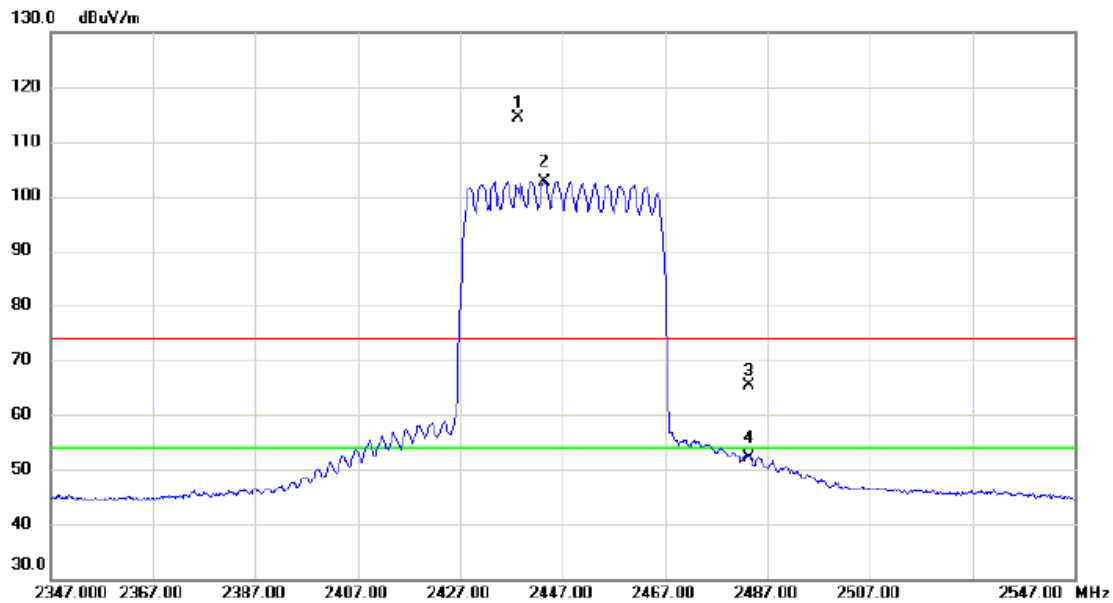


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2438.400	104.13	10.13	114.26	74.00	40.26	peak	No Limit
2	*	2443.500	92.57	10.15	102.72	54.00	48.72	AVG	No Limit
3		2483.500	55.10	10.29	65.39	74.00	-8.61	peak	
4		2483.500	41.89	10.29	52.18	54.00	-1.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz

Vertical

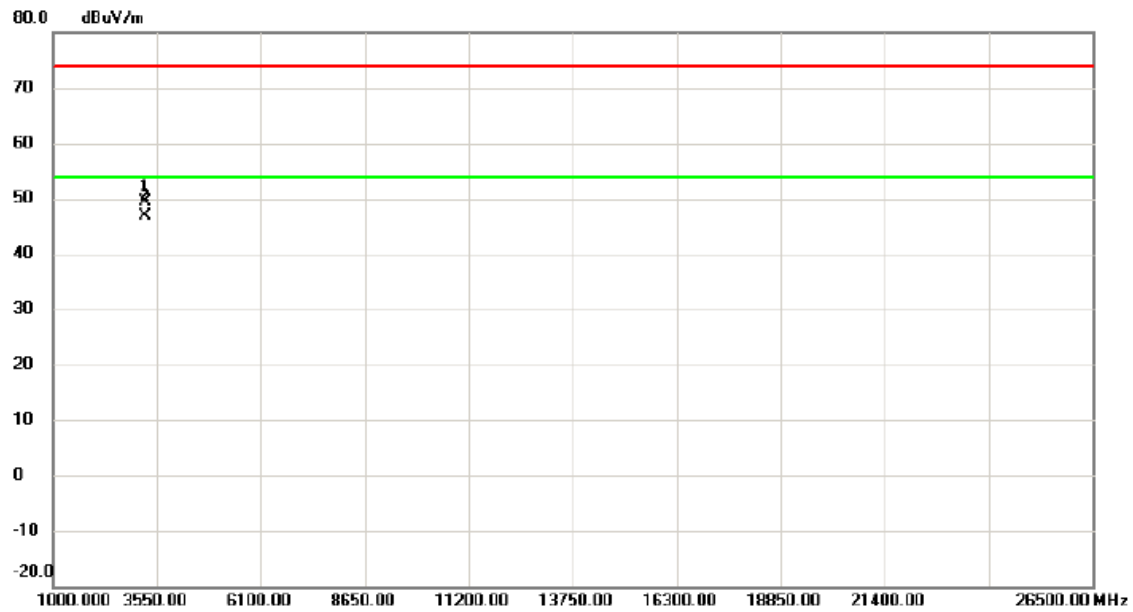


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3262.580	46.17	3.18	49.35	74.00	-24.65	peak	
2	*	3262.680	43.58	3.18	46.76	54.00	-7.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz

Horizontal

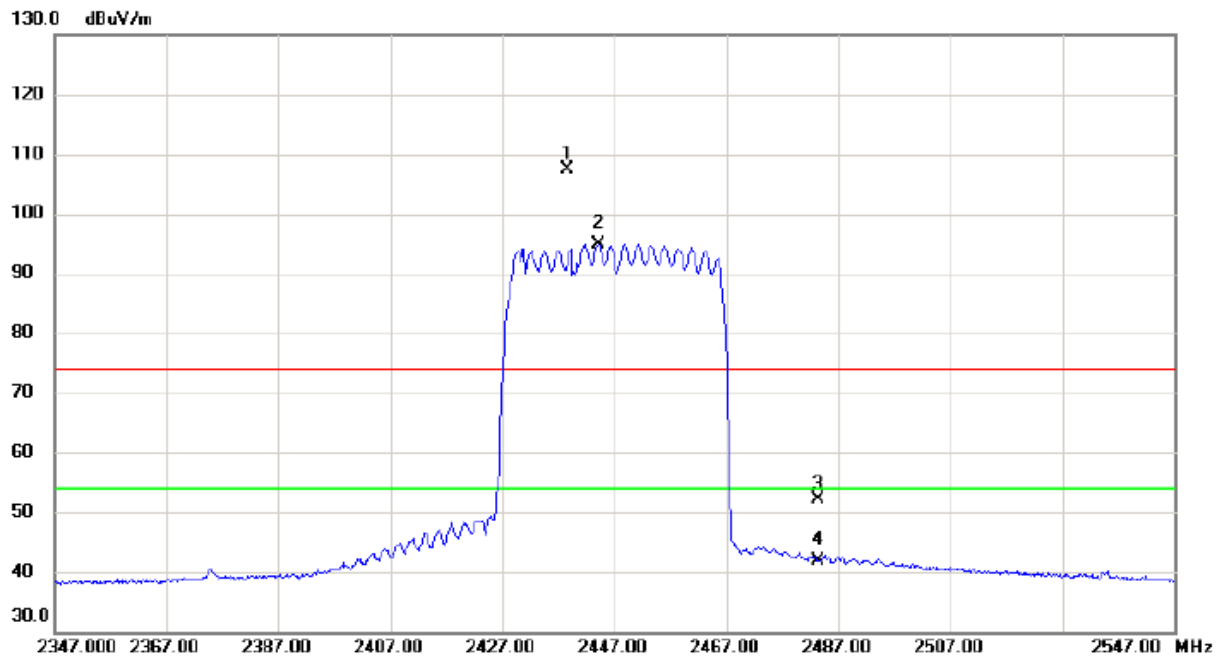

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2438.500	97.36	10.13	107.49	74.00	33.49	peak	No Limit
2	*	2444.100	84.82	10.16	94.98	54.00	40.98	AVG	No Limit
3		2483.500	41.91	10.29	52.20	74.00	-21.80	peak	
4		2483.500	31.66	10.29	41.95	54.00	-12.05	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2447 MHz

Horizontal

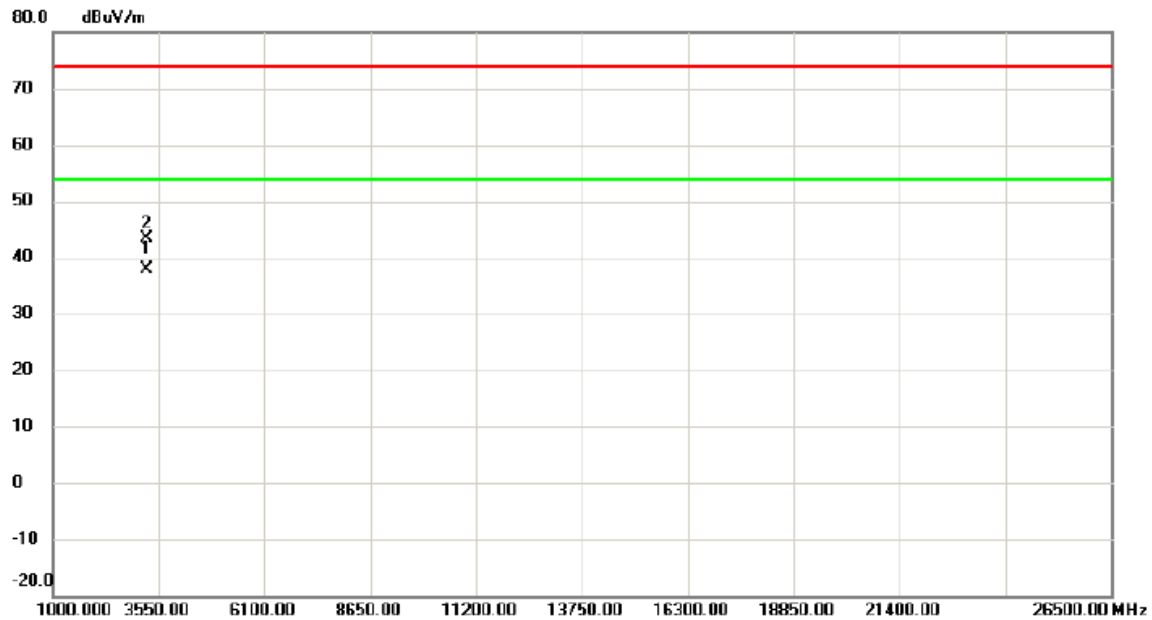

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	3262.730	34.61	3.18	37.79	54.00	-16.21	AVG	
2		3262.830	40.17	3.18	43.35	74.00	-30.65	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2452 MHz

Vertical

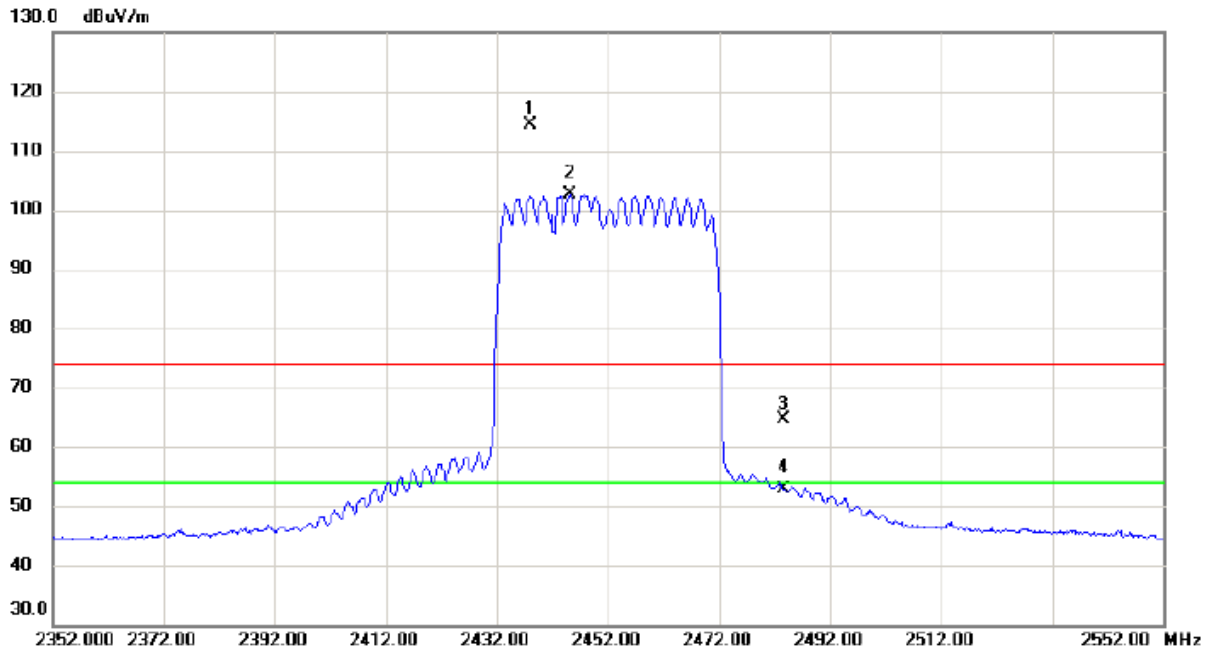

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2437.900	104.25	10.13	114.38	74.00	40.38	peak	No Limit
2	*	2445.200	92.41	10.16	102.57	54.00	48.57	AVG	No Limit
3		2483.500	54.34	10.29	64.63	74.00	-9.37	peak	
4		2483.500	42.61	10.29	52.90	54.00	-1.10	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2452 MHz

Vertical

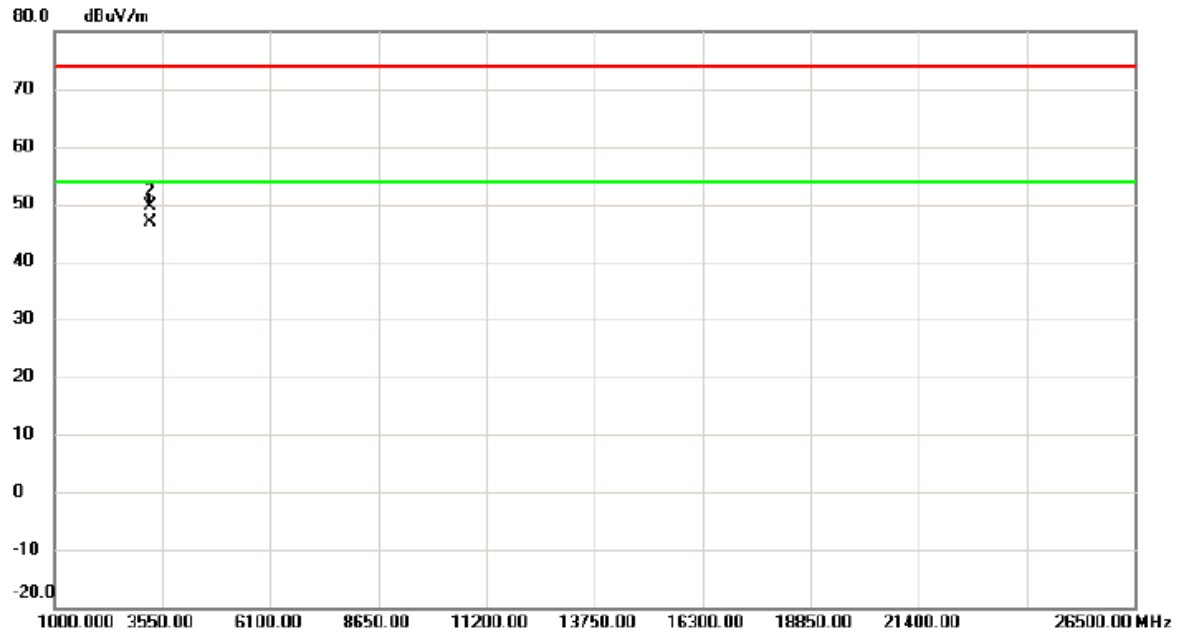


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	3269.330	43.70	3.19	46.89	54.00	-7.11	AVG	
2		3269.530	46.32	3.19	49.51	74.00	-24.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2452 MHz

Horizontal

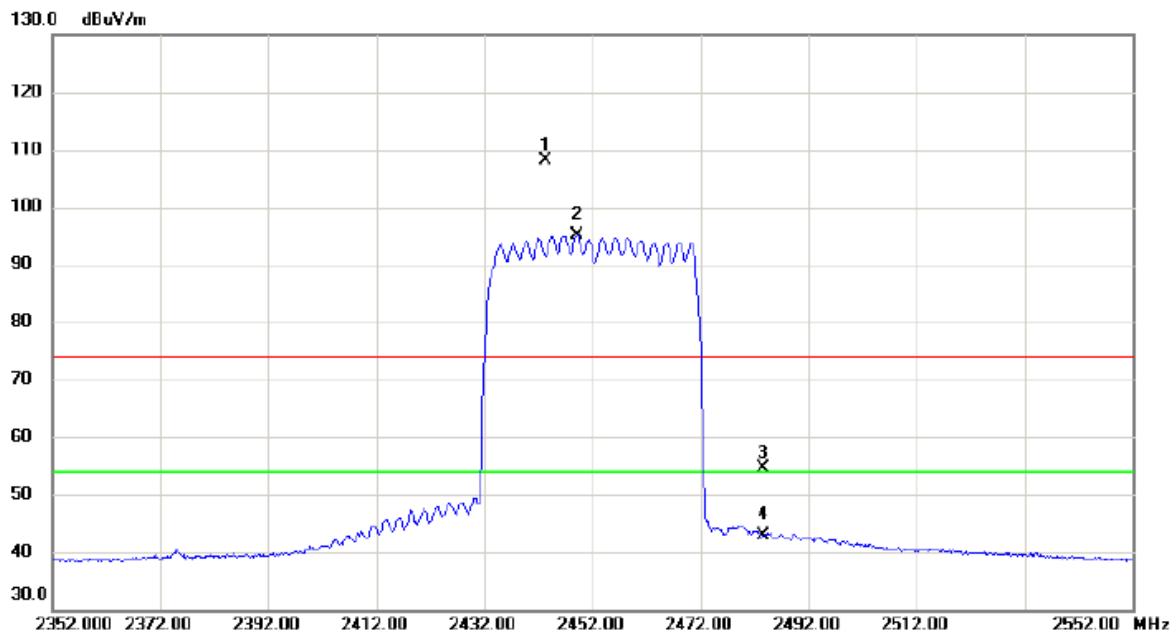

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2443.400	98.01	10.15	108.16	74.00	34.16	peak	No Limit
2	*	2449.200	84.99	10.17	95.16	54.00	41.16	AVG	No Limit
3		2483.500	44.44	10.29	54.73	74.00	-19.27	peak	
4		2483.500	32.53	10.29	42.82	54.00	-11.18	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2452 MHz

Horizontal

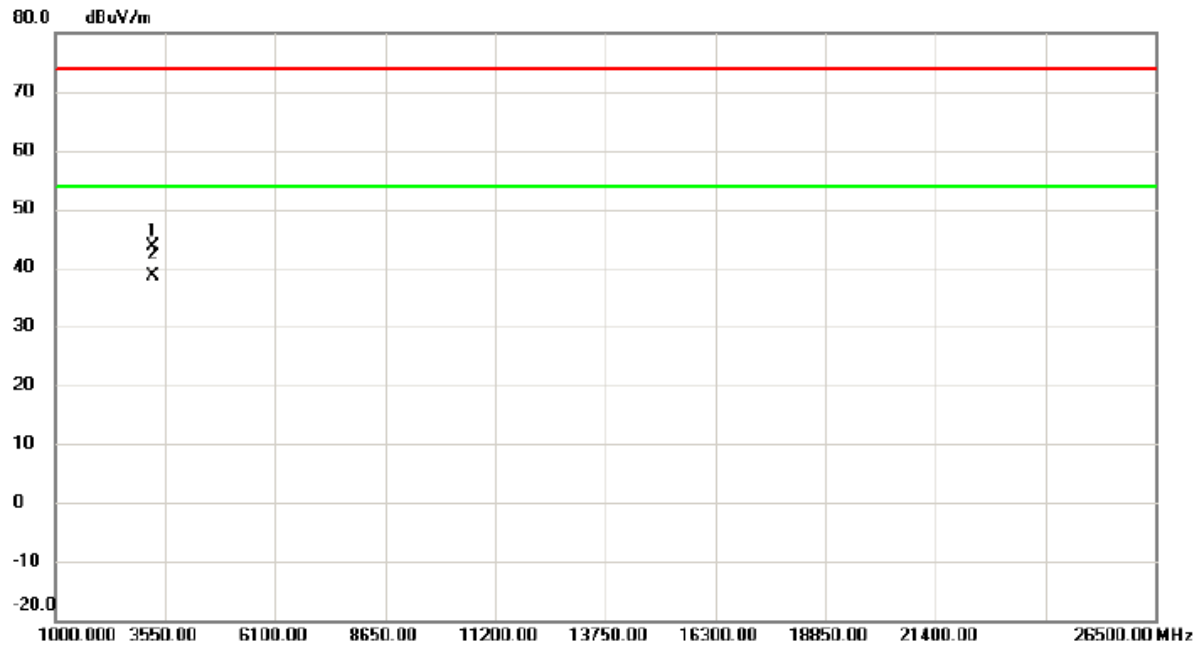

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		3269.380	40.48	3.19	43.67	74.00	-30.33	peak
2	*	3269.430	35.42	3.19	38.61	54.00	-15.39	AVG


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: WLAN2.4G_TX N(HT20) Mode 2437MHz + RLAN5G_TX AX(HEW20) Mode 5745MHz

Vertical

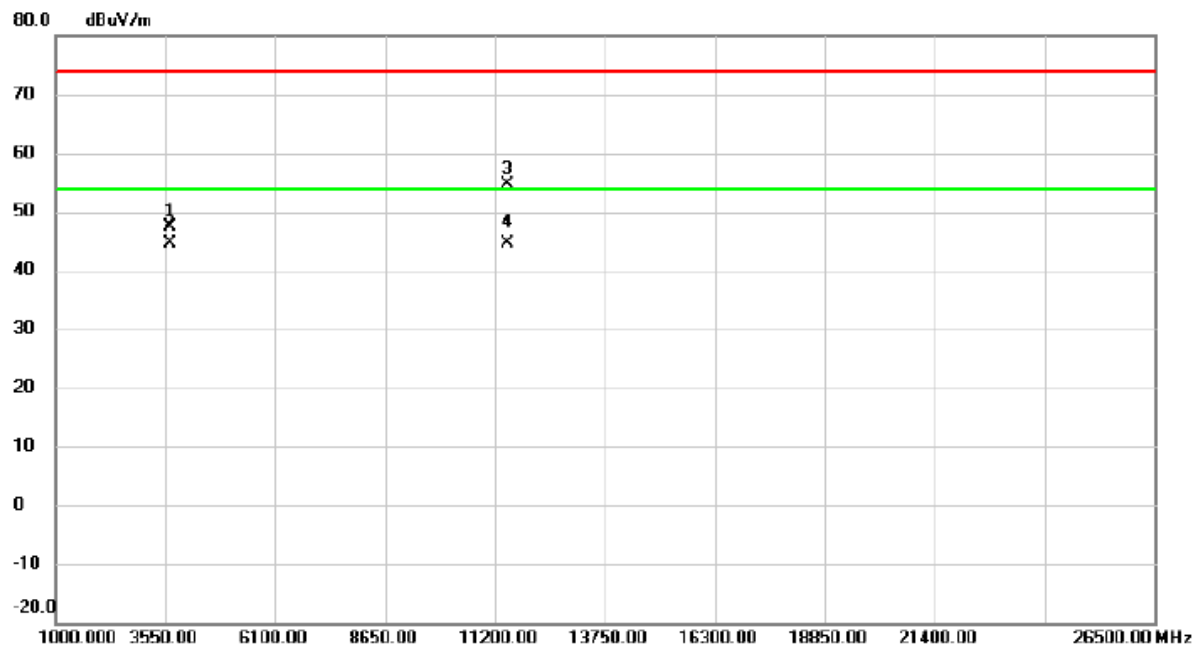


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3655.120	43.58	3.80	47.38	74.00	-26.62	peak	
2	*	3655.150	40.89	3.80	44.69	54.00	-9.31	AVG	
3		11490.320	37.67	16.95	54.62	74.00	-19.38	peak	
4		11490.500	27.63	16.95	44.58	54.00	-9.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: WLAN2.4G_TX N(HT20) Mode 2437MHz + RLAN5G_TX AX(HEW20) Mode 5745MHz

Horizontal

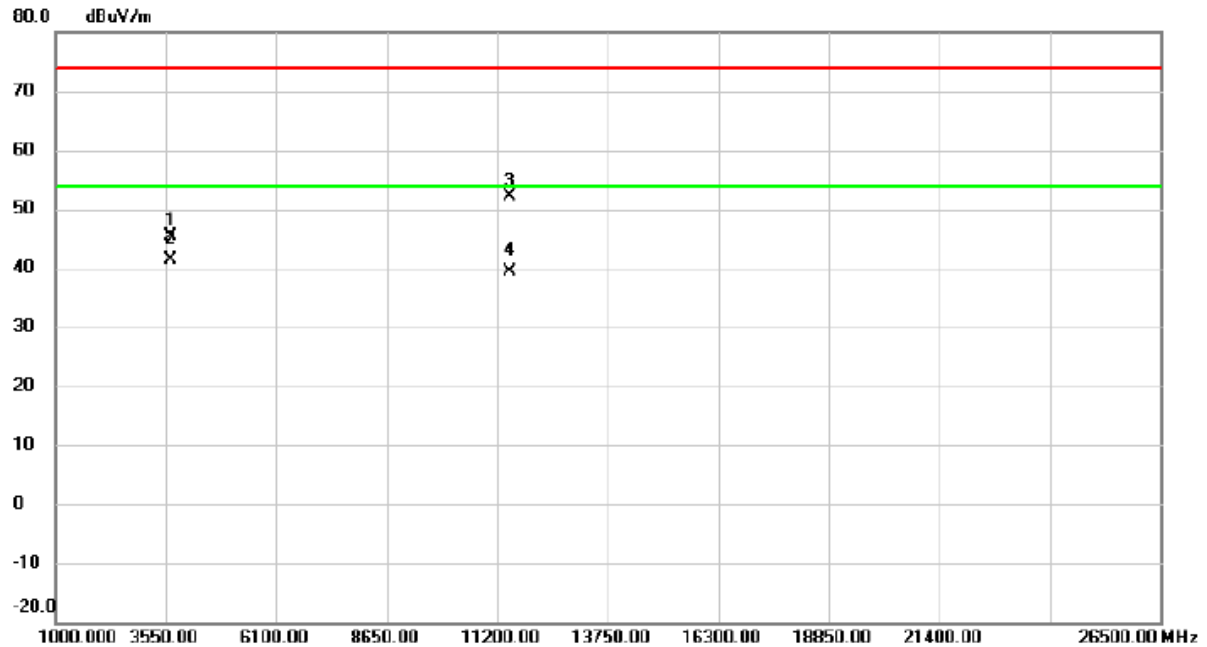

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3655.320	41.58	3.80	45.38	74.00	-28.62	peak	
2	*	3655.330	37.58	3.80	41.38	54.00	-12.62	AVG	
3		11490.250	35.17	16.95	52.12	74.00	-21.88	peak	
4		11490.370	22.44	16.95	39.39	54.00	-14.61	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.


APPENDIX E - BANDWIDTH

Test Mode	TX B Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	7.08	500	Complies
06	2437	7.07	500	Complies
11	2462	7.07	500	Complies

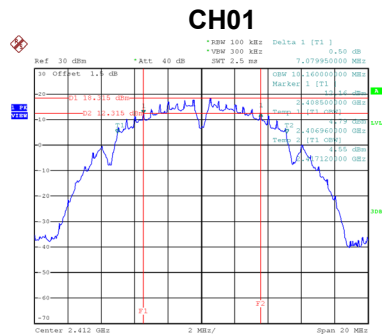

Date: 7.MAR.2020 17:51:51

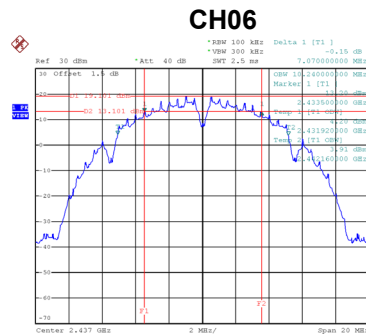


Date: 7.MAR.2020 17:54:34

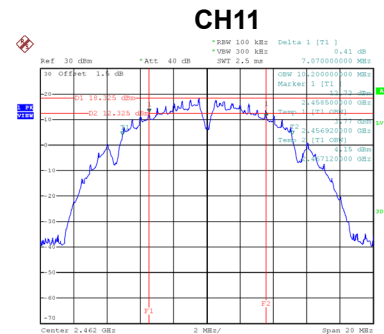


Date: 7.MAR.2020 17:56:13


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	10.48	Complies
06	2437	10.48	Complies
11	2462	10.48	Complies

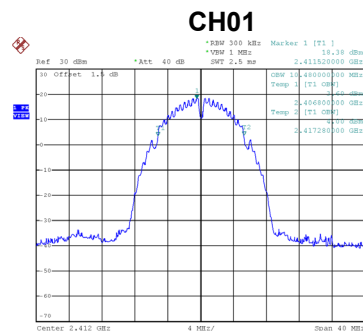

Date: 7.MAR.2020 19:35:15

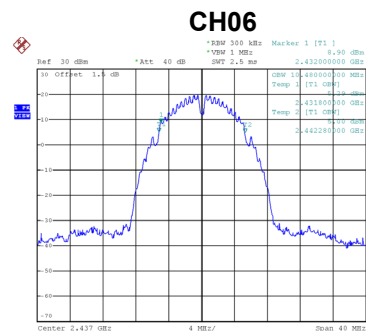

Date: 7.MAR.2020 19:36:14

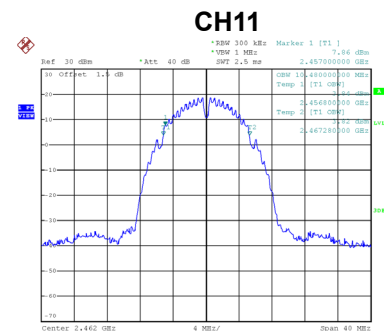

Date: 7.MAR.2020 19:37:32

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	16.38	500	Complies
06	2437	16.39	500	Complies
11	2462	16.42	500	Complies






Date: 7.MAR.2020 19:37:59






Test Mode	TX N-40M Mode
-----------	---------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	36.44	500	Complies
06	2437	36.44	500	Complies
09	2452	36.44	500	Complies

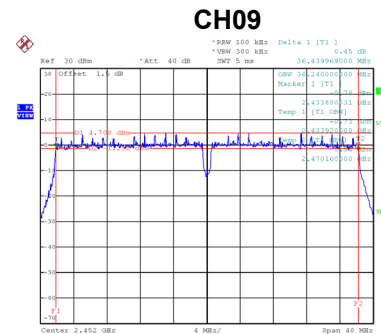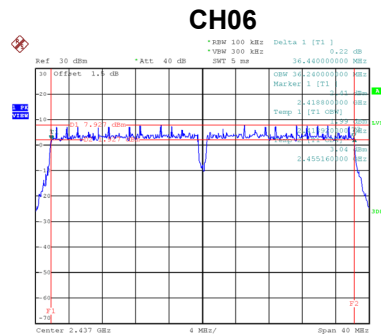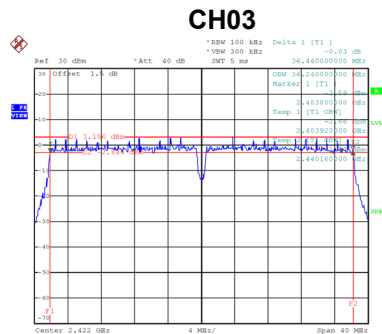


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	36.96	Complies
06	2437	36.96	Complies
09	2452	36.80	Complies

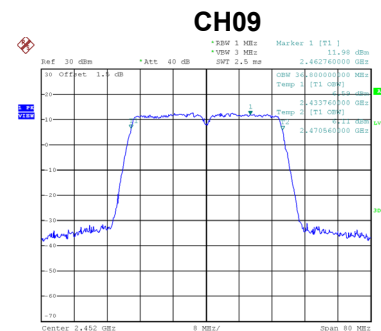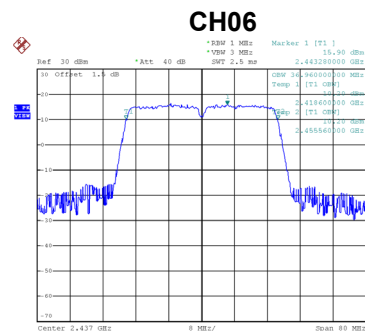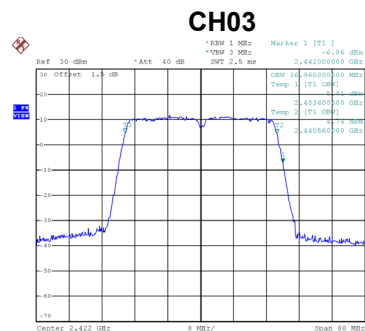


Test Mode	TX AX-20M Mode
-----------	----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	19.06	500	Complies
06	2437	19.02	500	Complies
11	2462	19.08	500	Complies

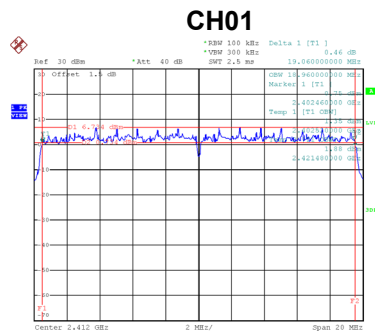

Date: 7.MAR.2020 19:19:48

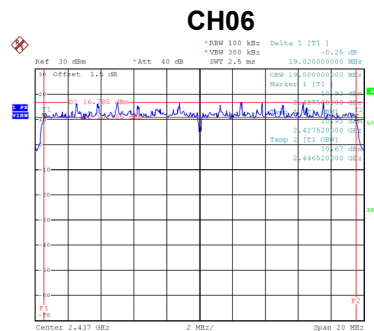


Date: 7.MAR.2020 19:23:55

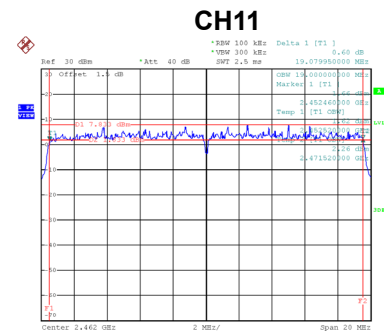


Date: 7.MAR.2020 19:25:53


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	19.12	Complies
06	2437	19.92	Complies
11	2462	19.12	Complies

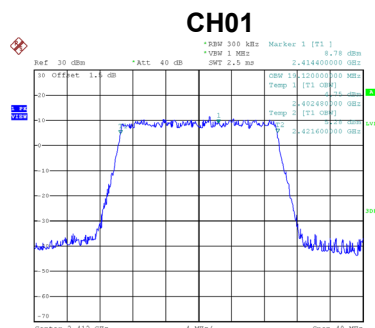

Date: 7.MAR.2020 19:44:49

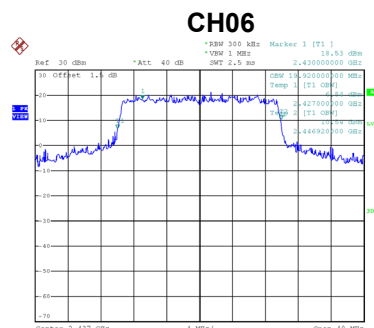




Date: 7.MAR.2020 19:45:16

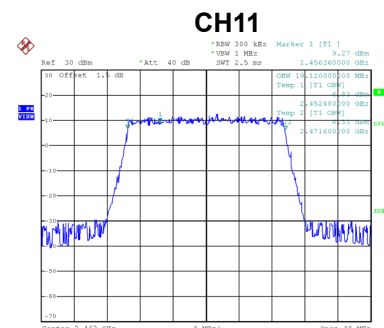




Date: 7.MAR.2020 19:45:44

Test Mode	TX AX-40M Mode
-----------	----------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	37.64	500	Complies
06	2437	37.67	500	Complies
09	2452	37.72	500	Complies

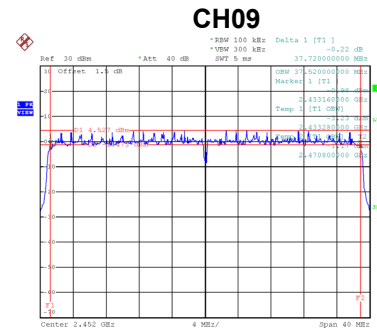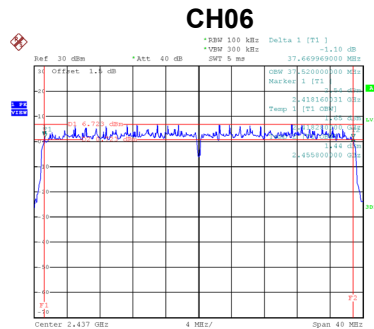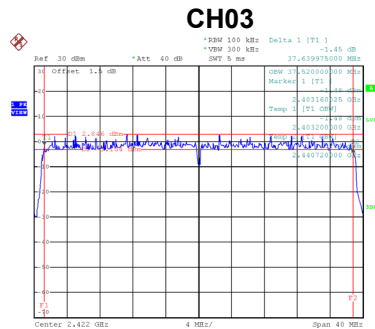

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	37.76	Complies
06	2437	37.76	Complies
09	2452	37.76	Complies

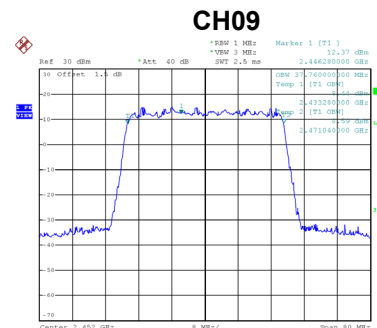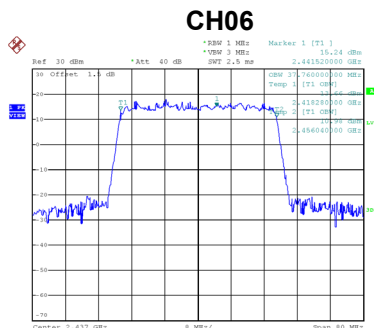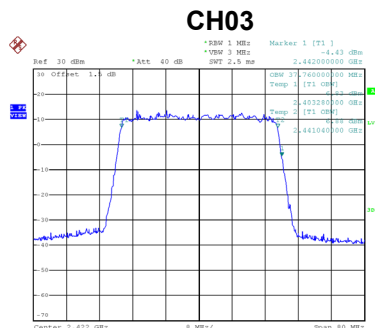

APPENDIX F - MAXIMUM OUTPUT POWER

Non Beamforming

Test Mode	TX B Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	25.02	0.23	25.25	30.00	1.0000	Complies
06	2437	26.62	0.23	26.85	30.00	1.0000	Complies
11	2462	25.97	0.23	26.20	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	25.31	0.23	25.54	30.00	1.0000	Complies
06	2437	26.51	0.23	26.74	30.00	1.0000	Complies
11	2462	25.84	0.23	26.07	30.00	1.0000	Complies

Test Mode	TX B Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	28.40	30.00	1.0000	Complies
06	2437	29.80	30.00	1.0000	Complies
11	2462	29.14	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.72	0.25	19.97	30.00	1.0000	Complies
06	2437	26.87	0.25	27.12	30.00	1.0000	Complies
11	2462	23.34	0.25	23.59	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.56	0.25	19.81	30.00	1.0000	Complies
06	2437	26.51	0.25	26.76	30.00	1.0000	Complies
11	2462	22.96	0.25	23.21	30.00	1.0000	Complies

Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.90	30.00	1.0000	Complies
06	2437	29.95	30.00	1.0000	Complies
11	2462	26.41	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.76	0.25	20.01	30.00	1.0000	Complies
06	2437	26.82	0.25	27.07	30.00	1.0000	Complies
11	2462	20.02	0.25	20.27	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.51	0.25	19.76	30.00	1.0000	Complies
06	2437	26.61	0.25	26.86	30.00	1.0000	Complies
11	2462	19.68	0.25	19.93	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.89	30.00	1.0000	Complies
06	2437	29.97	30.00	1.0000	Complies
11	2462	23.11	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.67	0.57	17.24	30.00	1.0000	Complies
06	2437	21.63	0.57	22.20	30.00	1.0000	Complies
09	2452	18.15	0.57	18.72	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.35	0.57	16.92	30.00	1.0000	Complies
06	2437	21.34	0.57	21.91	30.00	1.0000	Complies
09	2452	17.92	0.57	18.49	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.10	30.00	1.0000	Complies
06	2437	25.07	30.00	1.0000	Complies
09	2452	21.62	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 1
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.39	0.11	18.50	30.00	1.0000	Complies
06	2437	26.96	0.11	22.79	30.00	1.0000	Complies
11	2462	19.53	0.11	27.07	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 2
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.05	0.11	18.16	30.00	1.0000	Complies
06	2437	26.61	0.11	22.52	30.00	1.0000	Complies
11	2462	19.25	0.11	26.72	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Total
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.35	30.00	1.0000	Complies
06	2437	29.91	30.00	1.0000	Complies
11	2462	22.52	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 1
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	17.08	0.39	17.47	30.00	1.0000	Complies
06	2437	21.14	0.39	18.58	30.00	1.0000	Complies
09	2452	18.88	0.39	21.53	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 2
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.59	0.39	16.98	30.00	1.0000	Complies
06	2437	20.62	0.39	18.24	30.00	1.0000	Complies
09	2452	18.61	0.39	21.01	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Total
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.24	30.00	1.0000	Complies
06	2437	24.29	30.00	1.0000	Complies
09	2452	22.15	30.00	1.0000	Complies

Beamforming

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.81	0.25	20.06	30.00	1.0000	Complies
06	2437	25.86	0.25	26.11	30.00	1.0000	Complies
11	2462	21.79	0.25	22.04	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.52	0.25	19.77	30.00	1.0000	Complies
06	2437	25.45	0.25	25.70	30.00	1.0000	Complies
11	2462	21.54	0.25	21.79	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.92	29.17	0.8260	Complies
06	2437	28.92	29.17	0.8260	Complies
11	2462	24.92	29.17	0.8260	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	17.52	0.57	18.09	30.00	1.0000	Complies
06	2437	21.15	0.57	21.72	30.00	1.0000	Complies
09	2452	18.24	0.57	18.81	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	17.03	0.57	17.60	30.00	1.0000	Complies
06	2437	20.87	0.57	21.44	30.00	1.0000	Complies
09	2452	17.81	0.57	18.38	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.87	29.17	0.8260	Complies
06	2437	24.60	29.17	0.8260	Complies
09	2452	21.61	29.17	0.8260	Complies

Test Mode	TX AX-20M Mode_Ant. 1
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.31	0.11	16.42	30.00	1.0000	Complies
06	2437	25.67	0.11	21.40	30.00	1.0000	Complies
11	2462	18.28	0.11	25.78	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Ant. 2
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.09	0.11	16.20	30.00	1.0000	Complies
06	2437	25.84	0.11	21.02	30.00	1.0000	Complies
11	2462	17.68	0.11	25.95	30.00	1.0000	Complies

Test Mode	TX AX-20M Mode_Total
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.33	29.17	0.8260	Complies
06	2437	28.88	29.17	0.8260	Complies
11	2462	21.11	29.17	0.8260	Complies

Test Mode	TX AX-40M Mode_Ant. 1
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	18.85	0.39	19.24	30.00	1.0000	Complies
06	2437	22.82	0.39	21.25	30.00	1.0000	Complies
09	2452	21.78	0.39	23.21	30.00	1.0000	Complies

Test Mode	TX AX-40M Mode_Ant. 2
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	18.51	0.39	18.90	30.00	1.0000	Complies
06	2437	22.69	0.39	20.96	30.00	1.0000	Complies
09	2452	21.64	0.39	23.08	30.00	1.0000	Complies


Test Mode	TX AX-40M Mode_Total
-----------	----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	21.94	29.17	0.8260	Complies
06	2437	26.01	29.17	0.8260	Complies
09	2452	24.97	29.17	0.8260	Complies

APPENDIX G - CONDUCTED SPURIOUS EMISSIONS


Test Mode TX B Mode_Ant. 1

Bandedge-CH01

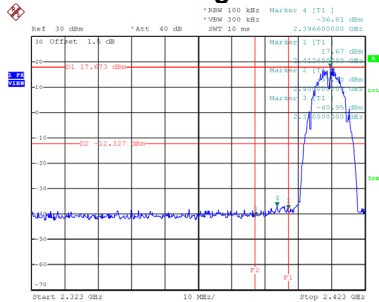


Date: 7.MAR.2020 17:51:59

Bandedge-CH11

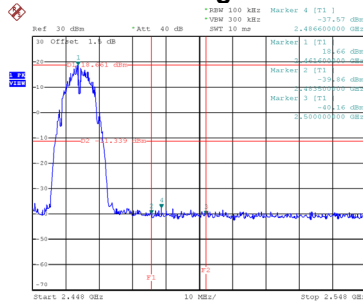


Date: 7.MAR.2020 17:56:21


CH01 – 10th Harmonic of the fundamental frequency

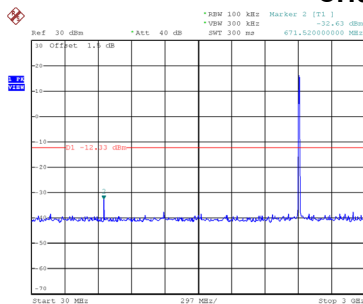

Date: 7.MAR.2020 17:52:13

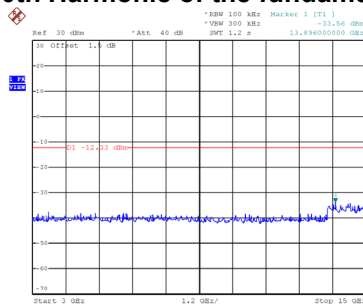


Date: 7.MAR.2020 17:52:20

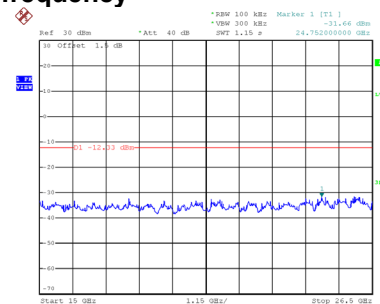


Date: 7.MAR.2020 17:52:28


CH06 – 10th Harmonic of the fundamental frequency

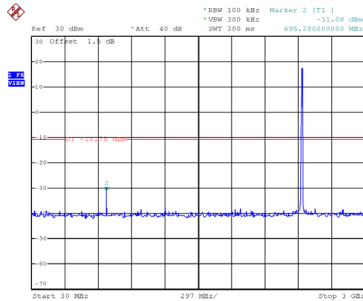

Date: 7.MAR.2020 17:54:55

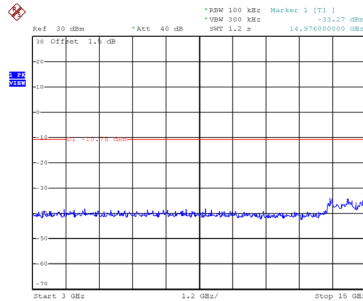


Date: 7.MAR.2020 17:55:03

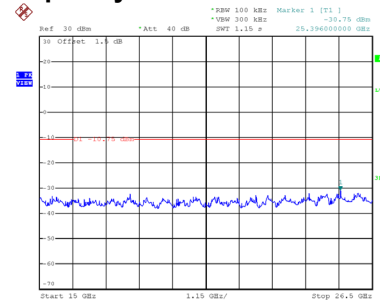


Date: 7.MAR.2020 17:55:11


CH11 – 10th Harmonic of the fundamental frequency

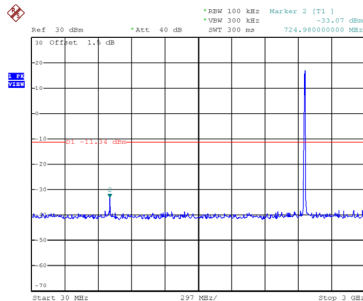

Date: 7.MAR.2020 17:56:35

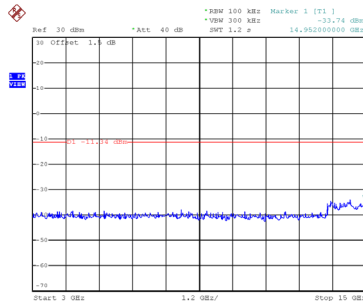


Date: 7.MAR.2020 17:56:42

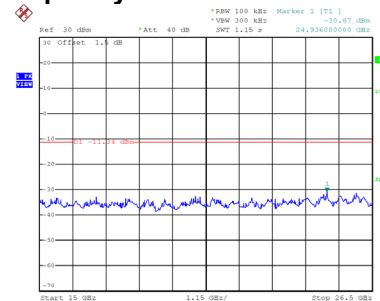

Date: 7.MAR.2020 17:56:50


Test Mode TX B Mode_Ant. 2

Bandedge-CH01

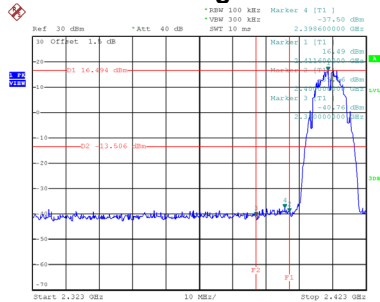


Date: 7.MAR.2020 18:49:21

Bandedge-CH11

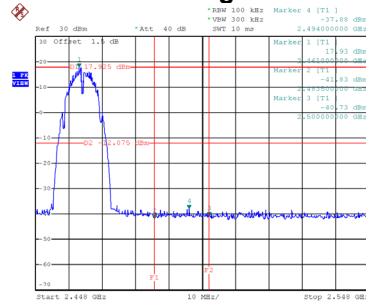


Date: 7.MAR.2020 18:53:00


CH01 – 10th Harmonic of the fundamental frequency

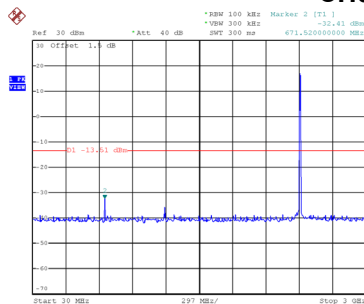

Date: 7.MAR.2020 18:49:35

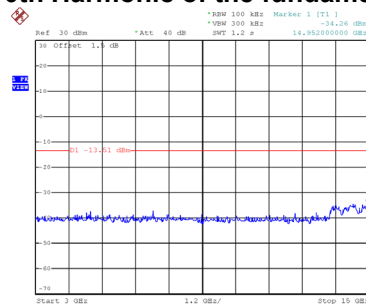


Date: 7.MAR.2020 18:49:43

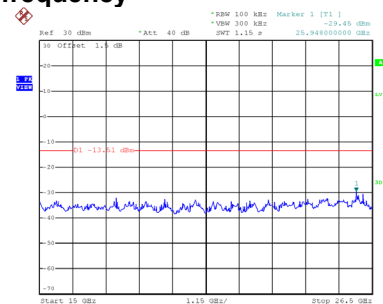


Date: 7.MAR.2020 18:49:50


CH06 – 10th Harmonic of the fundamental frequency

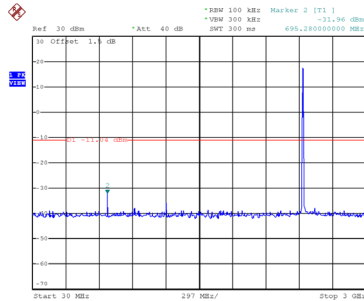

Date: 7.MAR.2020 18:51:16

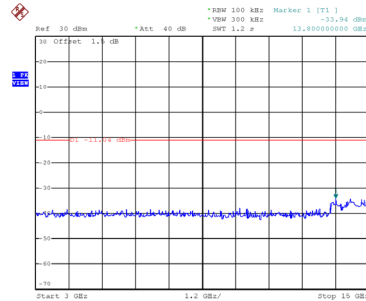


Date: 7.MAR.2020 18:51:24

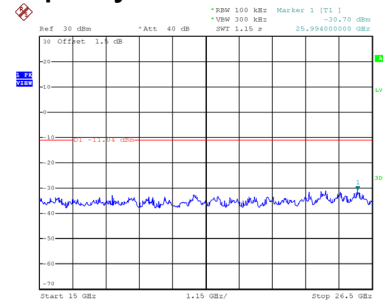


Date: 7.MAR.2020 18:51:31


CH11 – 10th Harmonic of the fundamental frequency

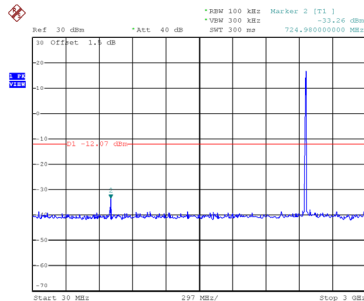

Date: 7.MAR.2020 18:53:14

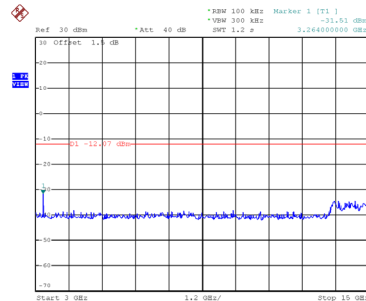


Date: 7.MAR.2020 18:53:21

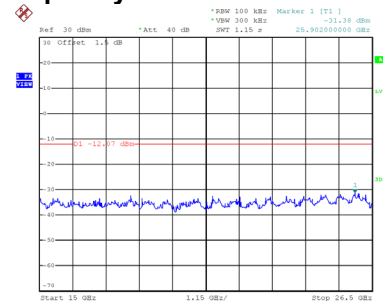

Date: 7.MAR.2020 18:53:29


Test Mode TX G Mode_Ant. 1

Bandedge-CH01

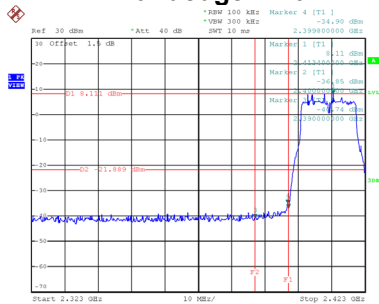


Date: 7.MAR.2020 17:57:45

Bandedge-CH11

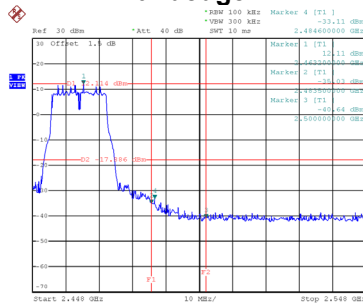


Date: 7.MAR.2020 18:38:47


CH01 – 10th Harmonic of the fundamental frequency

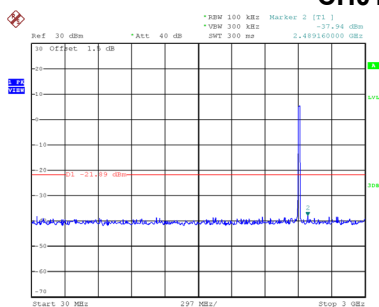

Date: 7.MAR.2020 17:57:59

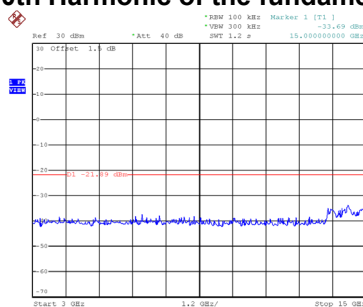


Date: 7.MAR.2020 17:58:06

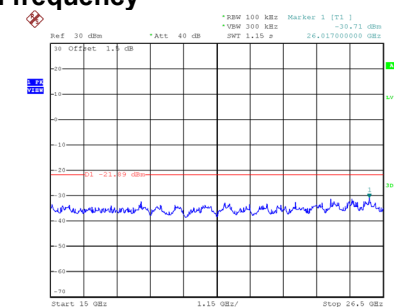


Date: 7.MAR.2020 17:58:14


CH06 – 10th Harmonic of the fundamental frequency

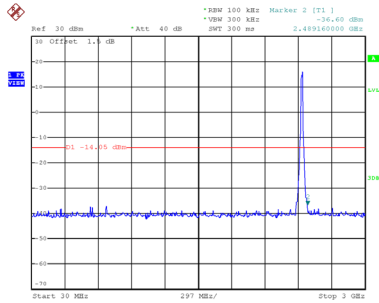

Date: 7.MAR.2020 17:59:25

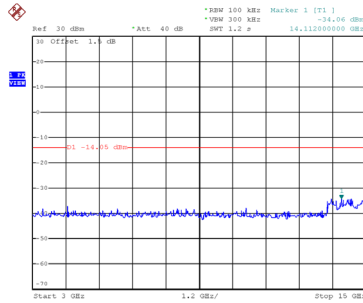


Date: 7.MAR.2020 17:59:33

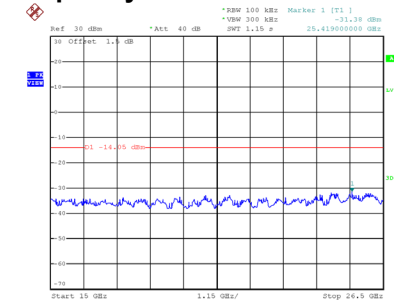


Date: 7.MAR.2020 17:59:41


CH11 – 10th Harmonic of the fundamental frequency

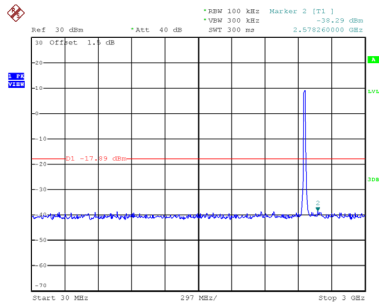

Date: 7.MAR.2020 18:39:01

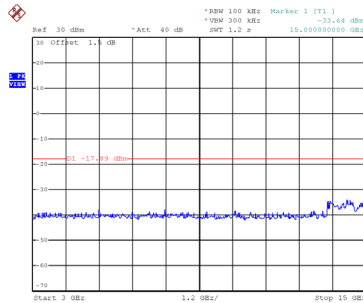

Date: 7.MAR.2020 18:39:09

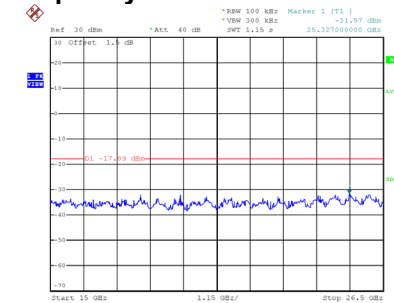

Date: 7.MAR.2020 18:39:17