

5.3. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. Frequency stability with respect to ambient temperature

- Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.
- Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.
- Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
- Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- Measure the frequency at each of frequencies specified in 5.6.
- Switch OFF the EUT but do not switch OFF the oscillator heater.
- Lower the chamber temperature by not more than 10°C, and allow the temperature inside the chamber to stabilize.
- Repeat step f) through step i) down to the lowest specified temperature.

2. Frequency stability when varying supply voltage

Unless otherwise specified, these tests shall be made at ambient room temperature (+15°C to +25 °C). An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

- Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument.

- b) Tune the EUT to one of the number of frequencies required in 5.6. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- c) Measure the frequency at each of the frequencies specified in 5.6.
- d) Repeat the above procedure at 85% and 115% of the nominal supply voltage.

Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936\text{Hz}$

Test Results

Voltage (V)	Temperature (°C)	U-NII-1 Test Results			
		5200MHz			
		1min	2min	5min	10min
3.3	-30	5200.003635	5200.001286	5199.991448	5199.986219
3.3	-20	5200.008441	5199.994509	5199.989961	5199.985478
3.3	-10	5200.007607	5199.985217	5199.985472	5199.978574
3.3	0	5200.003692	5199.980335	5199.980173	5199.972130
3.3	10	5199.997832	5199.971637	5199.975849	5199.966274
3.3	20	5199.995302	5199.961724	5199.971372	5199.959669
3.3	30	5199.992121	5199.953683	5199.966093	5199.959451
3.3	40	5199.983025	5199.944982	5199.965800	5199.952774
3.3	50	5199.982049	5199.944281	5199.960834	5199.949353
3	25	5199.973818	5199.943659	5199.951999	5199.940459
3.8	25	5199.965009	5199.935900	5199.943913	5199.936171
Max. ΔMHz		-0.034991	-0.064100	-0.056087	-0.063829
PPM		-6.729038	-12.326923	-10.785962	-12.274808

Voltage (V)	Temperature (°C)	U-NII-2A Test Results			
		5300MHz			
		1min	2min	5min	10min
3.3	-30	5299.995260	5299.991481	5299.986431	5299.984567
3.3	-20	5299.988832	5299.990062	5299.977927	5299.983609
3.3	-10	5299.985191	5299.987233	5299.976652	5299.977124
3.3	0	5299.985191	5299.982619	5299.971353	5299.968554
3.3	10	5299.981092	5299.980988	5299.967853	5299.963416
3.3	20	5299.977053	5299.977263	5299.961965	5299.958832
3.3	30	5299.968182	5299.968533	5299.953712	5299.950452
3.3	40	5299.964105	5299.962535	5299.944209	5299.942849
3.3	50	5299.956824	5299.954456	5299.941720	5299.941135
3	25	5299.954318	5299.952812	5299.934439	5299.940002
3.8	25	5299.947450	5299.943753	5299.929792	5299.932884
Max. ΔMHz		-0.052550	-0.056247	-0.070208	-0.067116
PPM		-9.915094	-10.612642	-13.246792	-12.663396

Voltage (V)	Temperature (°C)	U-NII-2C Test Results			
		5580MHz			
		1min	2min	5min	10min
3.3	-30	5579.992097	5579.984868	5579.984203	5579.974643
3.3	-20	5579.986926	5579.977098	5579.979743	5579.972230
3.3	-10	5579.983850	5579.976977	5579.979698	5579.966639
3.3	0	5579.976641	5579.973983	5579.972364	5579.960384
3.3	10	5579.971805	5579.966384	5579.963556	5579.950700
3.3	20	5579.969399	5579.959203	5579.960058	5579.948306
3.3	30	5579.964629	5579.950533	5579.955078	5579.946100
3.3	40	5579.963657	5579.948318	5579.947173	5579.945752
3.3	50	5579.954063	5579.946620	5579.939220	5579.939856
3	25	5579.949152	5579.942250	5579.932398	5579.931786
3.8	25	5579.942083	5579.939906	5579.928100	5579.927489
Max. ΔMHz		-0.057917	-0.060094	-0.071900	-0.072511
PPM		-10.379391	-10.769534	-12.885305	-12.994803

Voltage (V)	Temperature (°C)	U-NII-3 Test Results			
		5785MHz			
		1min	2min	5min	10min
3.3	-30	5785.001236	5784.997048	5784.995607	5784.994767
3.3	-20	5784.996825	5784.996690	5784.989469	5784.989795
3.3	-10	5784.989386	5784.995966	5784.989036	5784.980081
3.3	0	5784.983890	5784.995629	5784.980902	5784.972109
3.3	10	5784.976118	5784.994213	5784.977502	5784.967500
3.3	20	5784.968587	5784.989620	5784.975552	5784.965360
3.3	30	5784.963121	5784.987333	5784.970196	5784.961152
3.3	40	5784.953398	5784.978494	5784.962202	5784.957084
3.3	50	5784.951033	5784.978332	5784.956617	5784.954676
3	25	5784.943572	5784.975488	5784.947412	5784.951471
3.8	25	5784.937833	5784.968542	5784.942178	5784.948168
Max. ΔMHz		-0.062167	-0.031458	-0.057822	-0.051832
PPM		-10.746240	-5.437857	-9.995160	-8.959723

5.4. Power Spectral Density

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.

Set RBW = 1MHz, VBW =3MHz for the band 5.150-5.250GHz, 5.250-5.350GHz, 5.470-5.725GHz.
Set RBW = 470kHz, VBW =1.5MHz for the band 5.725-5.850GHz

The conducted PSD is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

Test setup



Limits

Rule FCC Part 15.407(a)(1)/ FCC Part 15.407(a)(2) / FCC Part 15.407(a)(3)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the

amount in dB that the directional gain of the antenna exceeds 6 dBi.

Frequency Bands/GHz	Limits
5.15-5.25	11dBm/MHz
5.25-5.35 and 5.47-5.725	11dBm/MHz
5.725-5.85	30dBm/500kHz

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

Test Results:
SISO Antenna1
U-NII-1

Mode	Channel/ Frequency (MHz)	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	36/5180	4.75	5.04	11	PASS
	40/5200	4.95	5.24	11	PASS
	48/5240	4.86	5.15	11	PASS
802.11n HT20	36/5180	5.57	5.88	11	PASS
	40/5200	5.81	6.12	11	PASS
	48/5240	5.55	5.86	11	PASS
802.11n HT40	38/5190	3.35	3.95	11	PASS
	46/5230	3.72	4.32	11	PASS
802.11ac VHT20	36/5180	5.17	5.48	11	PASS
	40/5200	5.78	6.09	11	PASS
	48/5240	5.46	5.77	11	PASS
802.11ac VHT40	38/5190	3.43	4.03	11	PASS
	46/5230	3.31	3.91	11	PASS
802.11ac VHT80	42/5210	-0.33	0.81	11	PASS
802.11ax HE20	36/5180	4.09	4.20	11	PASS
	40/5200	4.44	4.55	11	PASS
	48/5240	4.26	4.37	11	PASS
802.11ax HE40	38/5190	2.38	2.60	11	PASS
	46/5230	2.80	3.02	11	PASS
802.11ax HE80	42/5210	-2.36	-1.93	11	PASS
Note: Power Spectral Density =Read Value+Duty cycle correction factor					

U-NII-2A

Mode	Channel /Frequency (MHz)	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	52/5260	4.29	4.58	11	PASS
	60/5300	4.32	4.61	11	PASS
	64/5320	4.63	4.92	11	PASS
802.11n HT20	52/5260	5.20	5.51	11	PASS
	60/5300	5.37	5.68	11	PASS
	64/5320	5.23	5.54	11	PASS
802.11n HT40	54/5270	2.52	3.12	11	PASS
	62/5310	2.64	3.24	11	PASS
802.11ac VHT20	52/5260	5.23	5.54	11	PASS
	60/5300	5.11	5.42	11	PASS
	64/5320	4.96	5.27	11	PASS
802.11ac VHT40	54/5270	2.46	3.06	11	PASS
	62/5310	2.59	3.19	11	PASS
802.11ac VHT80	58/5290	-0.83	0.31	11	PASS
802.11ax HE20	52/5260	4.16	4.27	11	PASS
	60/5300	4.24	4.35	11	PASS
	64/5320	4.25	4.36	11	PASS
802.11ax HE40	54/5270	1.92	2.14	11	PASS
	62/5310	1.62	1.84	11	PASS
802.11ax HE80	58/5290	-1.64	-1.21	11	PASS
Note: Power Spectral Density =Read Value+Duty cycle correction factor					

U-NII-2C

Mode	Channel /Frequency (MHz)	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	100/5500	4.21	4.50	11	PASS
	116/5580	4.35	4.64	11	PASS
	140/5700	4.21	4.50	11	PASS
	144/5720	4.45	4.74	11	PASS
802.11n HT20	100/5500	5.08	5.39	11	PASS
	116/5580	5.13	5.44	11	PASS
	140/5700	4.80	5.11	11	PASS
	144/5720	5.32	5.63	11	PASS
802.11n HT40	102/5510	2.50	3.10	11	PASS
	110/5550	2.36	2.96	11	PASS
	134/5670	1.42	2.02	11	PASS
	142/5710	2.58	3.18	11	PASS
802.11ac VHT20	100/5500	4.88	5.19	11	PASS
	116/5580	5.28	5.59	11	PASS
	140/5700	5.18	5.49	11	PASS
	144/5720	4.92	5.23	11	PASS
802.11ac VHT40	102/5510	2.48	3.08	11	PASS
	110/5550	2.37	2.97	11	PASS
	134/5670	1.35	1.95	11	PASS
	142/5710	2.39	2.99	11	PASS
802.11ac VHT80	106/5530	-0.87	0.27	11	PASS
	138/5690	-0.52	0.62	11	PASS
802.11ax HE20	100/5500	4.18	4.29	11	PASS
	116/5580	4.47	4.58	11	PASS
	140/5700	4.37	4.48	11	PASS
	144/5720	4.38	4.49	11	PASS
802.11ax HE40	102/5510	2.25	2.47	11	PASS
	110/5550	1.61	1.83	11	PASS
	134/5670	2.28	2.50	11	PASS
	142/5710	1.58	1.80	11	PASS
802.11ax HE80	106/5530	-2.52	-2.09	11	PASS
	138/5690	-1.07	-0.64	11	PASS
Note: Power Spectral Density =Read Value+Duty cycle correction factor					

U-NII-3

Mode	Channel /Frequency (MHz)	Read Value (dBm/470kHz)	Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)	Conclusion
802.11a	144/5720	-1.20	-0.64	30	PASS
	149/5745	1.50	2.06	30	PASS
	157/5785	1.63	2.19	30	PASS
	165/5825	1.22	1.78	30	PASS
802.11n HT20	144/5720	-0.53	0.05	30	PASS
	149/5745	2.28	2.86	30	PASS
	157/5785	2.25	2.83	30	PASS
	165/5825	2.02	2.60	30	PASS
802.11n HT40	142/5710	-4.31	-3.44	30	PASS
	151/5755	-0.79	0.08	30	PASS
	159/5795	-0.59	0.28	30	PASS
802.11ac VHT20	144/5720	-0.72	-0.14	30	PASS
	149/5745	2.28	2.86	30	PASS
	157/5785	2.01	2.59	30	PASS
	165/5825	1.62	2.20	30	PASS
802.11ac VHT40	142/5710	-3.96	-3.09	30	PASS
	151/5755	-0.64	0.23	30	PASS
	159/5795	-0.62	0.25	30	PASS
802.11ac VHT80	138/5690	-7.95	-6.54	30	PASS
	155/5775	-4.49	-3.08	30	PASS
802.11ax HE20	144/5720	-0.64	-0.26	30	PASS
	149/5745	1.26	1.64	30	PASS
	157/5785	1.61	1.99	30	PASS
	165/5825	1.50	1.88	30	PASS
802.11ax HE40	142/5710	-3.99	-3.50	30	PASS
	151/5755	-0.97	-0.48	30	PASS
	159/5795	-0.81	-0.32	30	PASS
802.11ax HE80	138/5690	-7.66	-6.96	30	PASS
	155/5775	-4.72	-4.02	30	PASS
Note: PSD=Read Value+Duty cycle correction factor +10*log(500/470)					

SISO Antenna2**U-NII-1**

Mode	Channel/ Frequency (MHz)	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	36/5180	4.71	5.00	11	PASS
	40/5200	5.01	5.30	11	PASS
	48/5240	4.89	5.18	11	PASS
802.11n HT20	36/5180	5.87	6.18	11	PASS
	40/5200	5.99	6.30	11	PASS
	48/5240	5.84	6.15	11	PASS
802.11n HT40	38/5190	3.10	3.70	11	PASS
	46/5230	3.30	3.90	11	PASS
802.11ac VHT20	36/5180	5.60	5.91	11	PASS
	40/5200	5.45	5.76	11	PASS
	48/5240	5.39	5.70	11	PASS
802.11ac VHT40	38/5190	3.25	3.85	11	PASS
	46/5230	3.54	4.14	11	PASS
802.11ac VHT80	42/5210	-0.80	0.34	11	PASS
802.11ax HE20	36/5180	4.09	4.20	11	PASS
	40/5200	4.57	4.68	11	PASS
	48/5240	4.85	4.96	11	PASS
802.11ax HE40	38/5190	1.90	2.12	11	PASS
	46/5230	2.92	3.14	11	PASS
802.11ax HE80	42/5210	-2.00	-1.57	11	PASS
Note: Power Spectral Density =Read Value+Duty cycle correction factor					

U-NII-2A

Mode	Channel /Frequency (MHz)	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	52/5260	5.00	5.29	11	PASS
	60/5300	5.03	5.32	11	PASS
	64/5320	5.07	5.36	11	PASS
802.11n HT20	52/5260	6.15	6.46	11	PASS
	60/5300	6.02	6.33	11	PASS
	64/5320	6.29	6.60	11	PASS
802.11n HT40	54/5270	3.42	4.02	11	PASS
	62/5310	3.02	3.62	11	PASS
802.11ac VHT20	52/5260	6.35	6.66	11	PASS
	60/5300	5.68	5.99	11	PASS
	64/5320	6.21	6.52	11	PASS
802.11ac VHT40	54/5270	3.12	3.72	11	PASS
	62/5310	2.88	3.48	11	PASS
802.11ac VHT80	58/5290	-0.77	0.37	11	PASS
802.11ax HE20	52/5260	4.43	4.54	11	PASS
	60/5300	4.20	4.31	11	PASS
	64/5320	5.14	5.25	11	PASS
802.11ax HE40	54/5270	2.39	2.61	11	PASS
	62/5310	2.23	2.45	11	PASS
802.11ax HE80	58/5290	-0.64	-0.21	11	PASS
Note: Power Spectral Density =Read Value+Duty cycle correction factor					

U-NII-2C

Mode	Channel /Frequency (MHz)	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	100/5500	4.33	4.62	11	PASS
	116/5580	4.43	4.72	11	PASS
	140/5700	4.42	4.71	11	PASS
	144/5720	4.20	4.49	11	PASS
802.11n HT20	100/5500	5.53	5.84	11	PASS
	116/5580	5.07	5.38	11	PASS
	140/5700	5.02	5.33	11	PASS
	144/5720	5.28	5.59	11	PASS
802.11n HT40	102/5510	3.05	3.65	11	PASS
	110/5550	2.75	3.35	11	PASS
	134/5670	1.81	2.41	11	PASS
	142/5710	2.83	3.43	11	PASS
802.11ac VHT20	100/5500	5.57	5.88	11	PASS
	116/5580	5.42	5.73	11	PASS
	140/5700	5.48	5.79	11	PASS
	144/5720	5.27	5.58	11	PASS
802.11ac VHT40	102/5510	3.13	3.73	11	PASS
	110/5550	2.59	3.19	11	PASS
	134/5670	2.79	3.39	11	PASS
	142/5710	2.90	3.50	11	PASS
802.11ac VHT80	106/5530	-1.33	-0.19	11	PASS
	138/5690	-1.41	-0.27	11	PASS
802.11ax HE20	100/5500	4.18	4.29	11	PASS
	116/5580	4.05	4.16	11	PASS
	140/5700	4.18	4.29	11	PASS
	144/5720	3.98	4.09	11	PASS
802.11ax HE40	102/5510	2.04	2.26	11	PASS
	110/5550	1.38	1.60	11	PASS
	134/5670	2.15	2.37	11	PASS
	142/5710	2.08	2.30	11	PASS
802.11ax HE80	106/5530	-2.57	-2.14	11	PASS
	138/5690	-1.15	-0.72	11	PASS
Note: Power Spectral Density =Read Value+Duty cycle correction factor					

U-NII-3

Mode	Channel /Frequency (MHz)	Read Value (dBm/470kHz)	Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)	Conclusion
802.11a	144/5720	-0.86	-0.30	30	PASS
	149/5745	1.41	1.97	30	PASS
	157/5785	1.73	2.29	30	PASS
	165/5825	1.70	2.26	30	PASS
802.11n HT20	144/5720	-0.35	0.23	30	PASS
	149/5745	2.64	3.22	30	PASS
	157/5785	2.20	2.78	30	PASS
	165/5825	2.39	2.97	30	PASS
802.11n HT40	142/5710	-3.62	-2.75	30	PASS
	151/5755	-0.11	0.76	30	PASS
	159/5795	-0.36	0.51	30	PASS
802.11ac VHT20	144/5720	-0.08	0.50	30	PASS
	149/5745	2.60	3.18	30	PASS
	157/5785	2.41	2.99	30	PASS
	165/5825	2.26	2.84	30	PASS
802.11ac VHT40	142/5710	-3.54	-2.67	30	PASS
	151/5755	0.07	0.94	30	PASS
	159/5795	-0.25	0.62	30	PASS
802.11ac VHT80	138/5690	-7.31	-5.90	30	PASS
	155/5775	-3.84	-2.43	30	PASS
802.11ax HE20	144/5720	-0.36	0.02	30	PASS
	149/5745	1.50	1.88	30	PASS
	157/5785	1.84	2.22	30	PASS
	165/5825	1.89	2.27	30	PASS
802.11ax HE40	142/5710	-3.68	-3.19	30	PASS
	151/5755	-0.56	-0.07	30	PASS
	159/5795	-0.71	-0.22	30	PASS
802.11ax HE80	138/5690	-7.12	-6.42	30	PASS
	155/5775	-4.45	-3.75	30	PASS
Note: PSD=Read Value+Duty cycle correction factor +10*log(500/470)					

MIMO

U-NII-1

Mode	Channel/ Frequency (MHz)	Power Spectral Density					Limit (dBm /MHz)	Conclusion
		Antenna 1		Antenna 2		Total PSD (dBm/MHz)		
		Read Value (dBm/MHz)	PSD (dBm/MHz)	Read Value (dBm/MHz)	PSD (dBm/MHz)			
802.11n HT20	36/5180	5.94	6.25	5.81	6.12	9.20	11	PASS
	40/5200	6.16	6.47	6.27	6.58	9.54	11	PASS
	48/5240	5.52	5.83	6.32	6.63	9.26	11	PASS
802.11n HT40	38/5190	2.63	3.23	3.12	3.72	6.49	11	PASS
	46/5230	2.62	3.22	3.36	3.96	6.62	11	PASS
802.11ac VHT20	36/5180	5.94	6.25	5.42	5.73	9.01	11	PASS
	40/5200	5.83	6.14	5.90	6.21	9.19	11	PASS
	48/5240	5.29	5.60	5.88	6.19	8.92	11	PASS
802.11ac VHT40	38/5190	2.99	3.59	3.05	3.65	6.63	11	PASS
	46/5230	2.42	3.02	3.25	3.85	6.47	11	PASS
802.11ac VHT80	42/5210	0.12	1.26	-1.07	0.07	3.72	11	PASS
802.11ax HE20	36/5180	4.31	4.42	4.41	4.52	7.48	11	PASS
	40/5200	4.45	4.56	4.88	4.99	7.79	11	PASS
	48/5240	5.67	5.78	4.83	4.94	8.39	11	PASS
802.11ax HE40	38/5190	2.67	2.89	2.49	2.71	5.81	11	PASS
	46/5230	2.38	2.60	2.31	2.53	5.58	11	PASS
802.11ax HE80	42/5210	-1.29	-0.86	-1.11	-0.68	2.24	11	PASS

Note: 1. Power Spectral Density = Read Value + Duty cycle correction factor

2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a),

the power spectral density = $10\log(10^{(\text{PSD antenna 1 in dBm}/10)} + 10^{(\text{PSD antenna 2 in dBm}/10)})$

3. According to KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)(i): If all antennas have the same gain,

Directional gain = $G_{\text{ANT}} + \text{Array Gain}$, For PSD measurements on all devices, Array Gain = $10\log(\text{Nant}/\text{Nss})\text{dB}$,

so directional gain = $G_{\text{ANT}} + \text{Array Gain} = -0.9 + 10\log(2/1) = 2.11 < 6\text{ dB}$.

So the PSD limit is 11 dBm.

U-NII-2A

Mode	Channel /Frequency (MHz)	Power Spectral Density					Limit (dBm /MHz)	Conclusion
		Antenna 1		Antenna 2		Total PSD (dBm/MHz)		
		Read Value (dBm/MHz)	PSD (dBm/MHz)	Read Value (dBm/MHz)	PSD (dBm/MHz)			
802.11n HT20	52/5260	5.11	5.42	6.22	6.53	9.02	11	PASS
	60/5300	5.56	5.87	6.08	6.39	9.15	11	PASS
	64/5320	5.29	5.60	6.18	6.49	9.08	11	PASS
802.11n HT40	54/5270	2.56	3.16	2.66	3.26	6.22	11	PASS
	62/5310	2.60	3.20	2.98	3.58	6.40	11	PASS
802.11ac VHT20	52/5260	5.12	5.43	6.05	6.36	8.93	11	PASS
	60/5300	4.91	5.22	5.88	6.19	8.74	11	PASS
	64/5320	5.18	5.49	5.92	6.23	8.89	11	PASS
802.11ac VHT40	54/5270	2.44	3.04	2.64	3.24	6.15	11	PASS
	62/5310	2.68	3.28	3.01	3.61	6.46	11	PASS
802.11ac VHT80	58/5290	-1.22	-0.08	-1.00	0.14	3.04	11	PASS
802.11ax HE20	52/5260	4.57	4.68	4.47	4.58	7.64	11	PASS
	60/5300	4.42	4.53	4.81	4.92	7.74	11	PASS
	64/5320	4.46	4.57	5.07	5.18	7.90	11	PASS
802.11ax HE40	54/5270	2.32	2.54	2.50	2.72	5.64	11	PASS
	62/5310	1.51	1.73	2.59	2.81	5.31	11	PASS
802.11ax HE80	58/5290	-1.66	-1.23	-1.26	-0.83	1.98	11	PASS

Note: 1. Power Spectral Density =Read Value+Duty cycle correction factor

2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a),

the power spectral density= $10\log(10^{(\text{PSD antenna 1 in dBm}/10)} + 10^{(\text{PSD antenna 2 in dBm}/10)})$

3. The manufacturer declared the transmitter output signals is CDD mode And Nss=1. According to KDB 662911 D01

Multiple Transmitter Output v02r01 F)2)f)(i): If all antennas have the same gain, Directional gain = $G_{\text{ANT}} + \text{Array Gain}$, For PSD measurements on all devices, Array Gain= $10\log(\text{Nant}/\text{Nss})\text{dB}$,

so directional gain= $G_{\text{ANT}} + \text{Array Gain} = -1.4 + 10\log(2/1) = 1.61 < 6 \text{ dBi}$. So the PSD limit is 11dBm

U-NII-2C

Mode	Channel /Frequency (MHz)	Power Spectral Density					Limit (dBm /MHz)	Conclusion
		Antenna 1		Antenna 2		Total PSD (dBm/MHz)		
		Read Value (dBm/MHz)	PSD (dBm/MHz)	Read Value (dBm/MHz)	PSD (dBm/MHz)			
802.11n HT20	100/5500	5.14	5.45	5.61	5.92	8.70	11	PASS
	116/5580	4.97	5.28	5.80	6.11	8.73	11	PASS
	140/5700	5.01	5.32	5.78	6.09	8.73	11	PASS
	144/5720	5.07	5.38	5.28	5.59	8.50	11	PASS
802.11n HT40	102/5510	2.22	2.82	1.42	2.02	5.45	11	PASS
	110/5550	1.57	2.17	1.89	2.49	5.34	11	PASS
	134/5670	1.20	1.80	1.05	1.65	4.74	11	PASS
	142/5710	2.20	2.80	1.82	2.42	5.62	11	PASS
802.11ac VHT20	100/5500	4.87	5.18	4.29	4.60	7.91	11	PASS
	116/5580	5.01	5.32	4.72	5.03	8.19	11	PASS
	140/5700	4.63	4.94	4.53	4.84	7.90	11	PASS
	144/5720	4.56	4.87	5.03	5.34	8.12	11	PASS
802.11ac VHT40	102/5510	2.00	2.60	2.34	2.94	5.78	11	PASS
	110/5550	1.51	2.11	1.84	2.44	5.29	11	PASS
	134/5670	1.04	1.64	1.11	1.71	4.69	11	PASS
	142/5710	1.97	2.57	2.20	2.80	5.70	11	PASS
802.11ac VHT80	106/5530	-1.46	-0.32	-2.41	-1.27	2.24	11	PASS
	138/5690	-0.86	0.28	-2.00	-0.86	2.76	11	PASS
802.11ax HE20	100/5500	3.97	4.08	2.98	3.09	6.62	11	PASS
	116/5580	4.05	4.16	3.07	3.18	6.71	11	PASS
	140/5700	4.21	4.32	3.74	3.85	7.10	11	PASS
	144/5720	4.15	4.26	3.44	3.55	6.93	11	PASS
802.11ax HE40	102/5510	1.62	1.84	1.31	1.53	4.70	11	PASS
	110/5550	1.65	1.87	1.39	1.61	4.75	11	PASS
	134/5670	1.53	1.75	1.09	1.31	4.55	11	PASS
	142/5710	1.53	1.75	1.79	2.01	4.89	11	PASS
802.11ax HE80	106/5530	-2.98	-2.55	-3.07	-2.64	0.42	11	PASS
	138/5690	-1.39	-0.96	-2.08	-1.65	1.72	11	PASS

Note: 1. Power Spectral Density =Read Value+Duty cycle correction factor

2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a),
the power spectral density= $10\log(10^{(\text{PSD antenna 1 in dBm/10})} + 10^{(\text{PSD antenna 2 in dBm/10})})$

3. The manufacturer declared the transmitter output signals is CDD mode And Nss=1. According to KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f(i): If all antennas have the same gain, Directional gain = $G_{\text{ANT}} + \text{Array Gain}$, For PSD measurements on all devices, Array Gain= $10\log(\text{Nant}/\text{Nss})\text{dB}$,
so directional gain= $G_{\text{ANT}} + \text{Array Gain} = -0.3 + 10\log(2/1) = 2.71 < 6 \text{ dBi}$. So the PSD limit is 11dBm

U-NII-3

Mode	Channel /Frequency (MHz)	Power Spectral Density					Limit (dBm /500kHz)	Conclusion
		Antenna 1		Antenna 2		Total PSD (dBm/500kHz)		
		Read Value (dBm/470kHz)	PSD (dBm/500kHz)	Read Value (dBm/470kHz)	PSD (dBm/500kHz)			
802.11n HT20	144/5720	-0.09	0.49	-0.47	0.11	3.31	30	PASS
	149/5745	2.32	2.90	1.98	2.56	5.74	30	PASS
	157/5785	2.13	2.71	2.45	3.03	5.88	30	PASS
	165/5825	2.24	2.82	2.37	2.95	5.90	30	PASS
802.11n HT40	142/5710	-3.84	-2.97	-3.92	-3.05	0.00	30	PASS
	151/5755	-0.94	-0.07	-0.26	0.61	3.29	30	PASS
	159/5795	-0.66	0.21	-0.90	-0.03	3.10	30	PASS
802.11ac VHT20	144/5720	-0.52	0.06	-0.87	-0.29	2.90	30	PASS
	149/5745	2.35	2.93	2.07	2.65	5.80	30	PASS
	157/5785	2.22	2.80	2.56	3.14	5.98	30	PASS
	165/5825	2.14	2.72	2.06	2.64	5.69	30	PASS
802.11ac VHT40	142/5710	-4.32	-3.45	-4.12	-3.25	-0.34	30	PASS
	151/5755	-0.81	0.06	-1.16	-0.29	2.90	30	PASS
	159/5795	-0.88	-0.01	-0.68	0.19	3.10	30	PASS
802.11ac VHT80	138/5690	-7.37	-5.96	-7.60	-6.19	-3.06	30	PASS
	155/5775	-4.48	-3.07	-4.92	-3.51	-0.27	30	PASS
802.11ax HE20	144/5720	-0.73	-0.35	-1.00	-0.62	2.53	30	PASS
	149/5745	1.45	1.83	1.51	1.89	4.87	30	PASS
	157/5785	1.49	1.87	1.12	1.50	4.70	30	PASS
	165/5825	1.10	1.48	1.66	2.04	4.78	30	PASS
802.11ax HE40	142/5710	-3.99	-3.50	-4.16	-3.67	-0.57	30	PASS
	151/5755	-1.19	-0.70	-1.43	-0.94	2.19	30	PASS
	159/5795	-1.04	-0.55	-1.14	-0.65	2.41	30	PASS
802.11ax HE80	138/5690	-7.11	-6.41	-7.53	-6.83	-3.60	30	PASS
	155/5775	-4.57	-3.87	-5.02	-4.32	-1.08	30	PASS

Note: 1. Power Spectral Density = Read Value+Duty cycle correction factor+10*LOG10(500/470)

2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a),


the power spectral density= $10\log(10^{(\text{PSD antenna 1 in dBm}/10)} + 10^{(\text{PSD antenna 2 in dBm}/10)})$

3. The manufacturer declared the transmitter output signals is CDD mode And Nss=1. According to KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)(i): If all antennas have the same gain, Directional gain = $G_{\text{ANT}} + \text{Array Gain}$, For PSD measurements on all devices, Array Gain= $10\log(N_{\text{ant}}/N_{\text{ss}})\text{dB}$, so directional gain= $G_{\text{ANT}} + \text{Array Gain} = 0.4 + 10\log(2/1) = 3.41 < 6 \text{ dBi}$. So the PSD limit is 30dBm


SISO Antenna 1

U-NII-1


PSD 802.11a 5180MHz

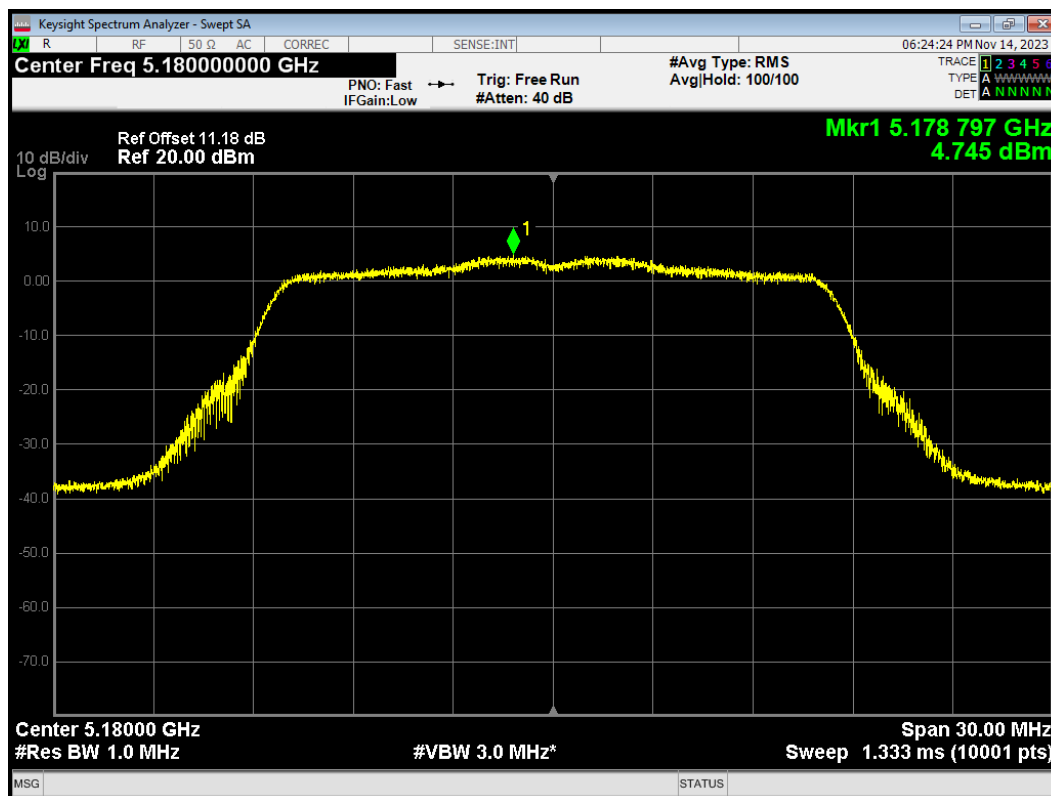


PSD 802.11a 5200MHz

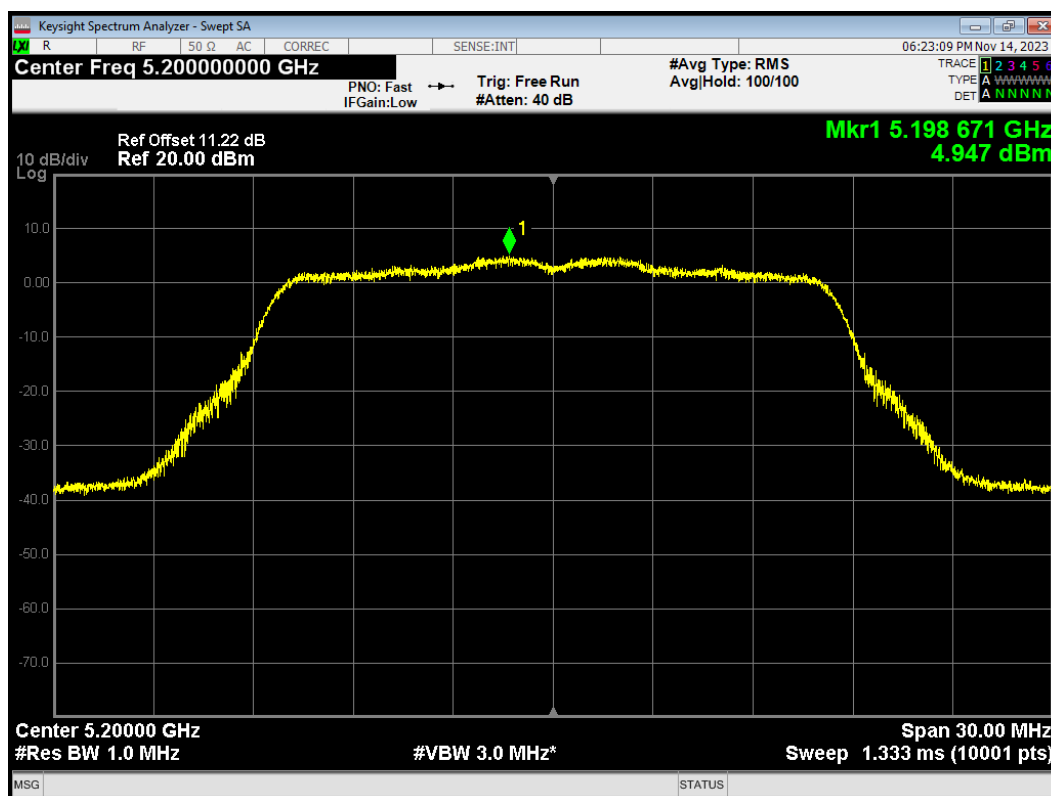


PSD 802.11a 5240MHz

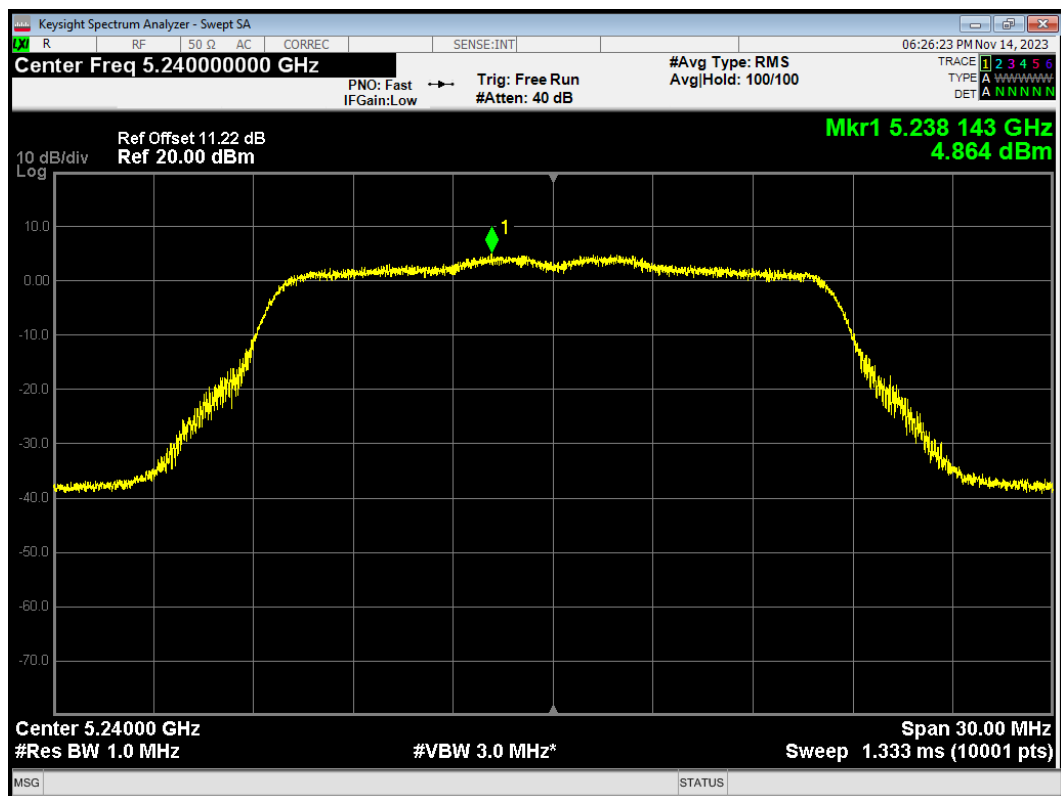


PSD 802.11ac(VHT20) 5180MHz

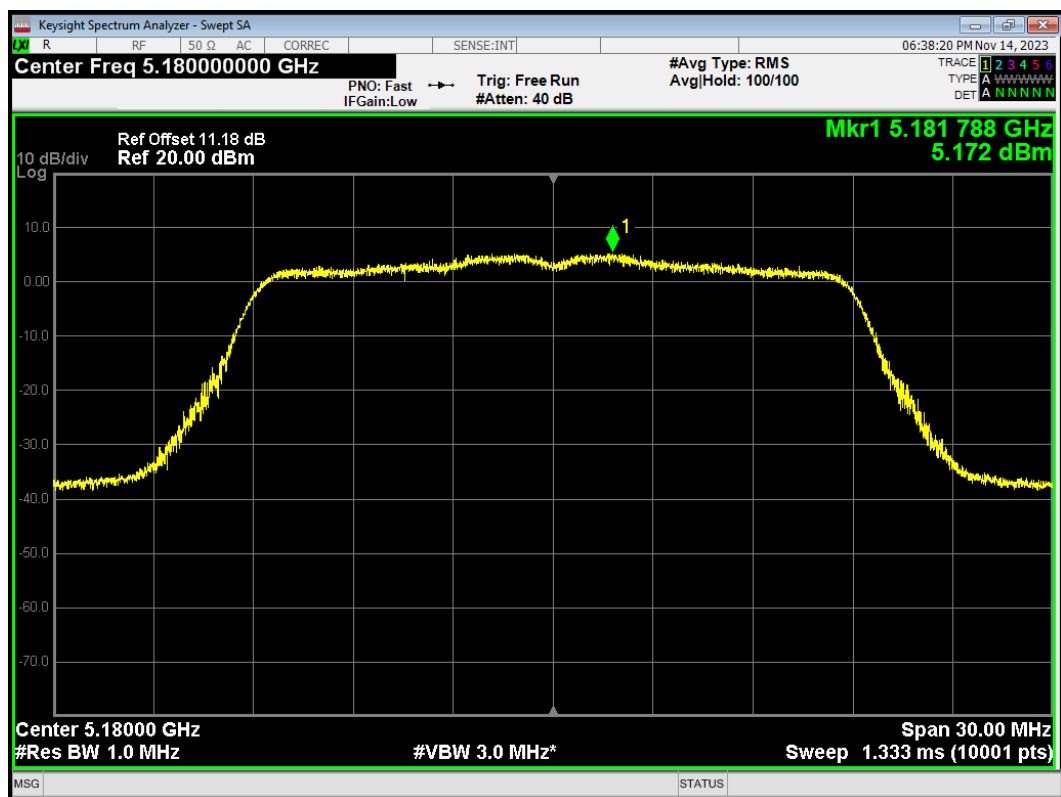


PSD 802.11ac(VHT20) 5200MHz

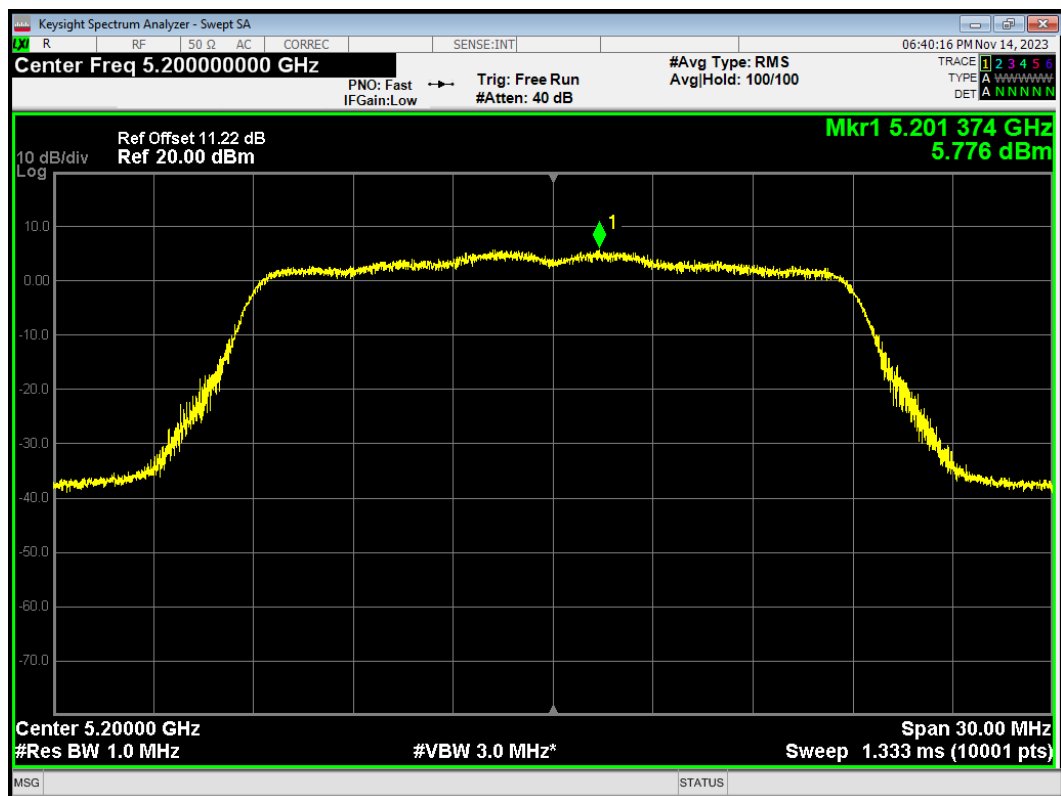


PSD 802.11ac(VHT20) 5240MHz

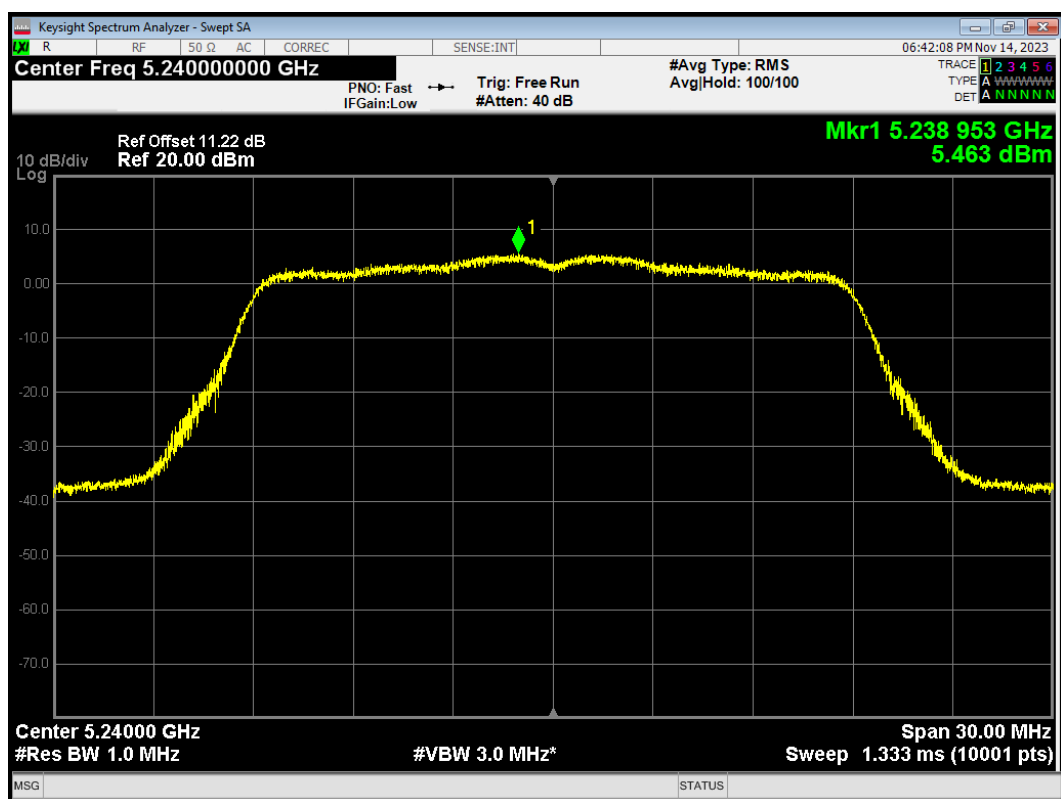


PSD 802.11ac(VHT40) 5190MHz

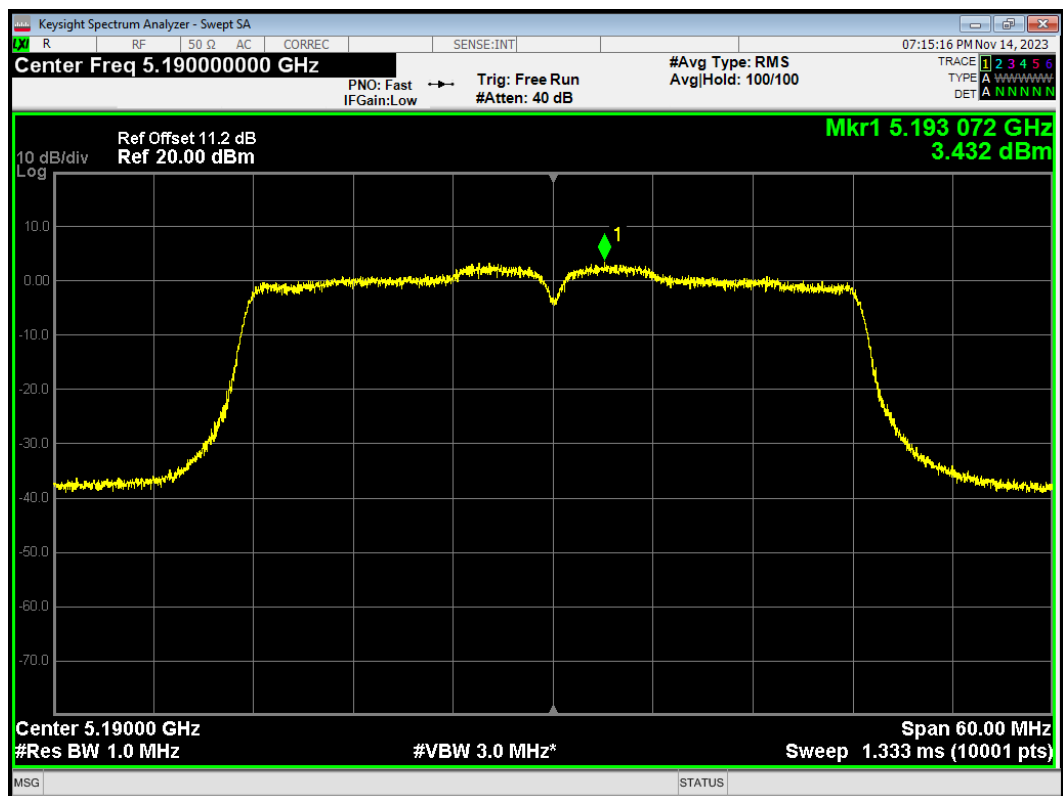


PSD 802.11ac(VHT40) 5230MHz

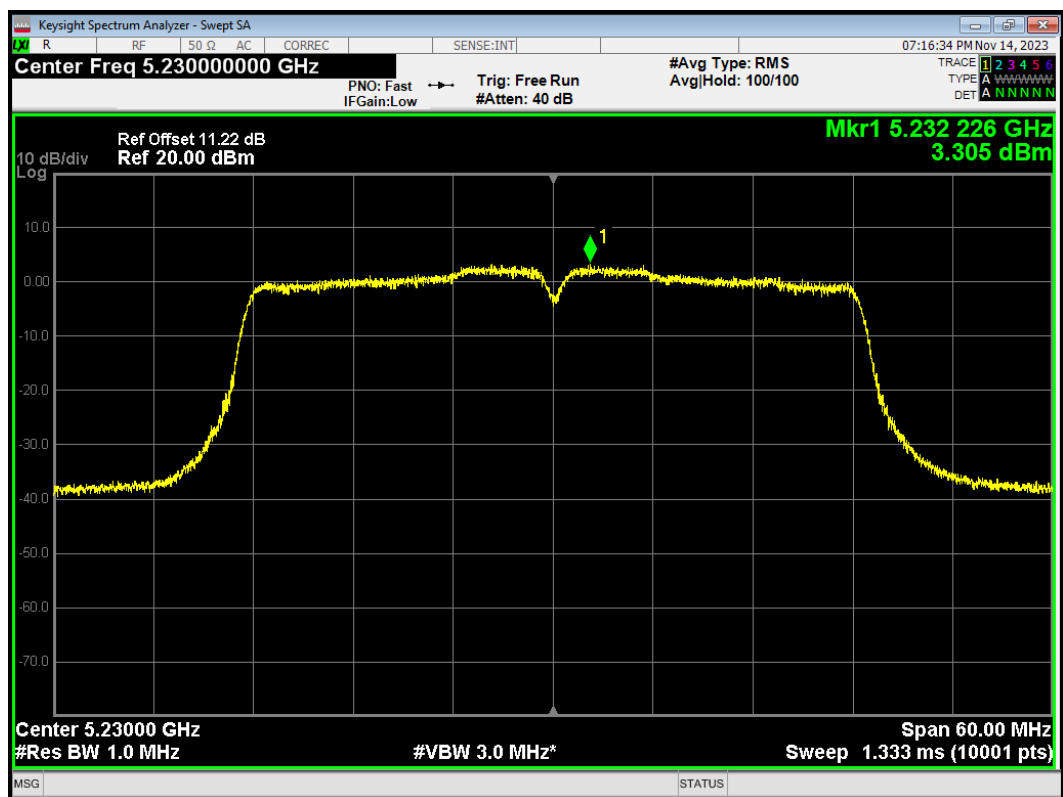


PSD 802.11ac(VHT80) 5210MHz

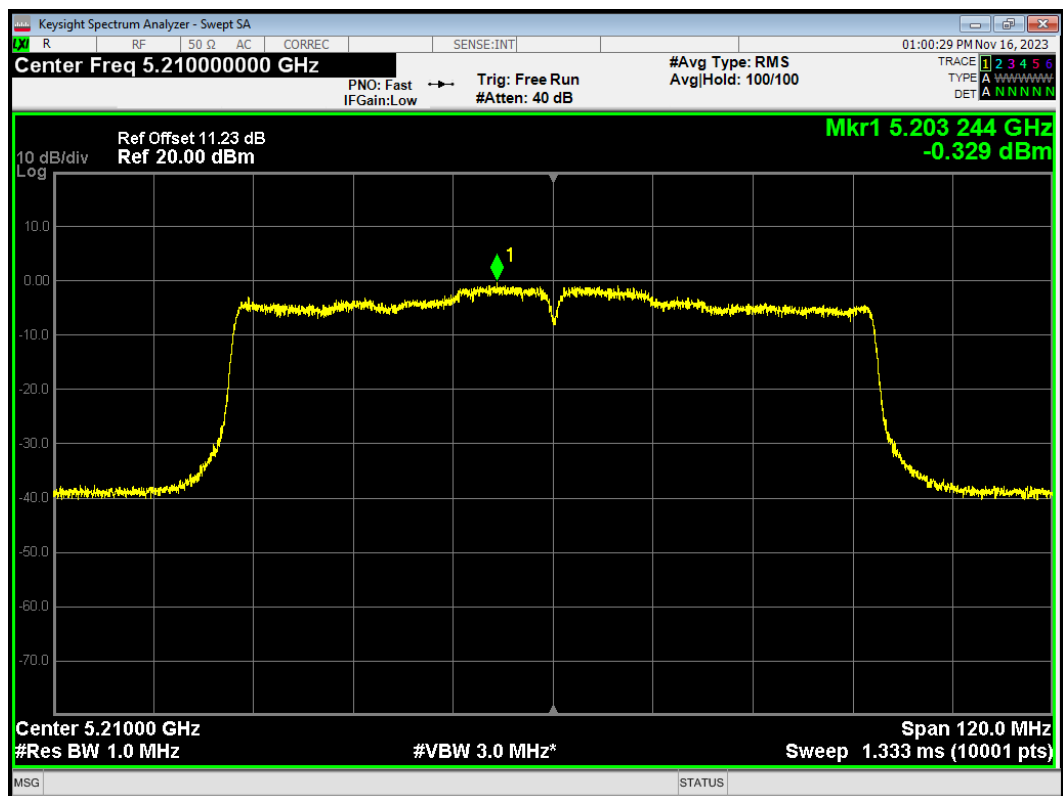


PSD 802.11ax(HE20) 5180MHz

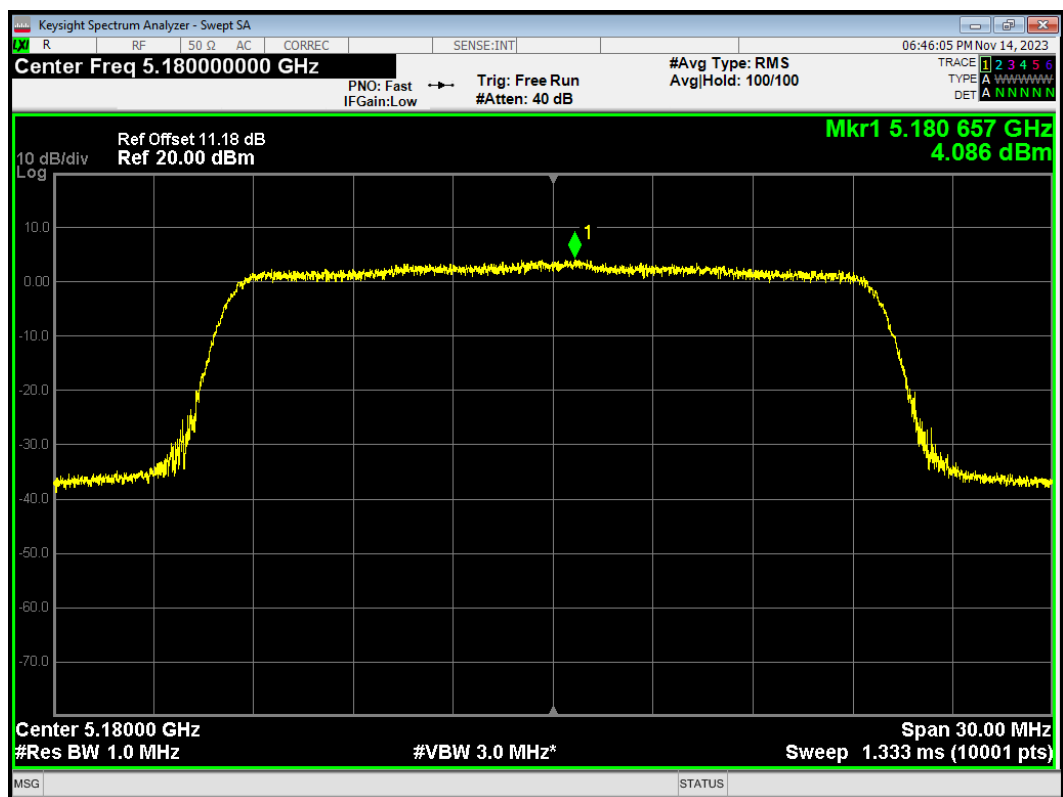


PSD 802.11ax(HE20) 5200MHz

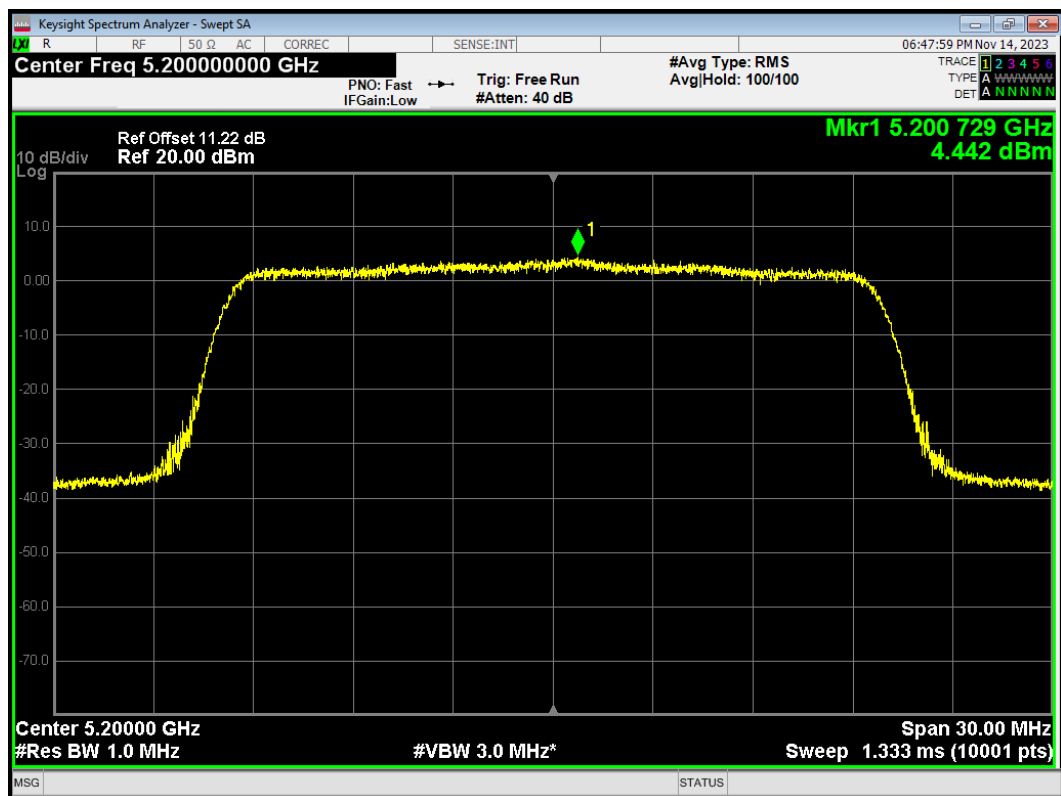


PSD 802.11ax(HE20) 5240MHz

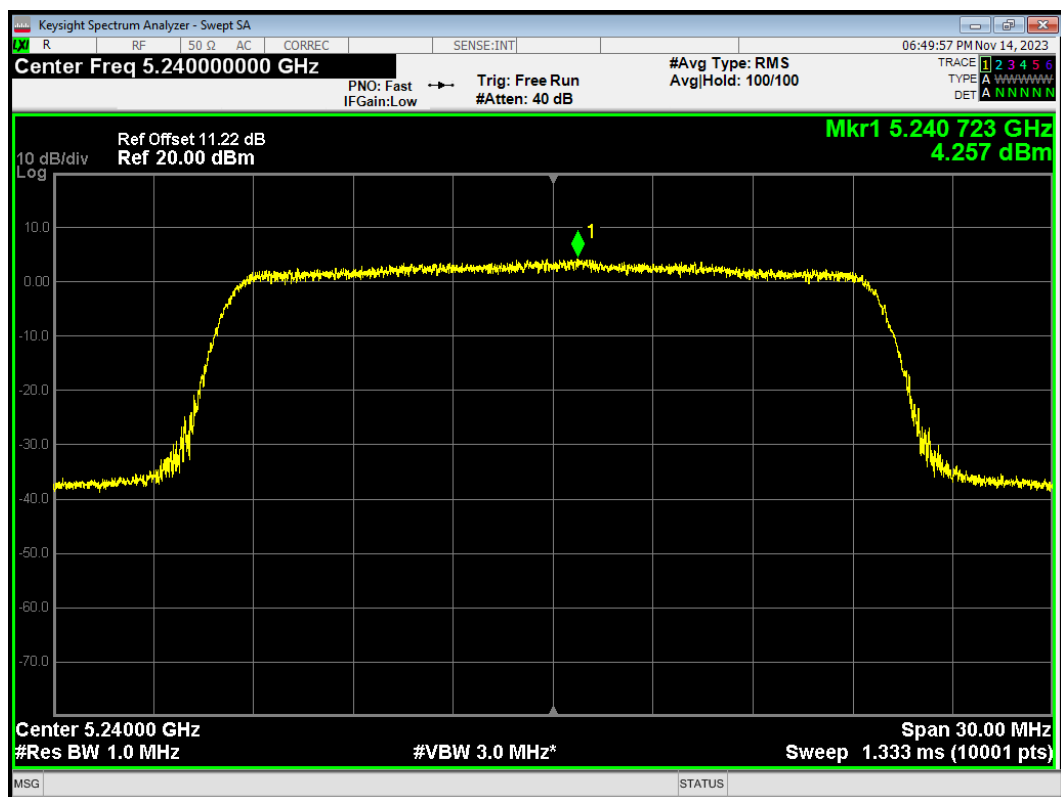


PSD 802.11ax(HE40) 5190MHz

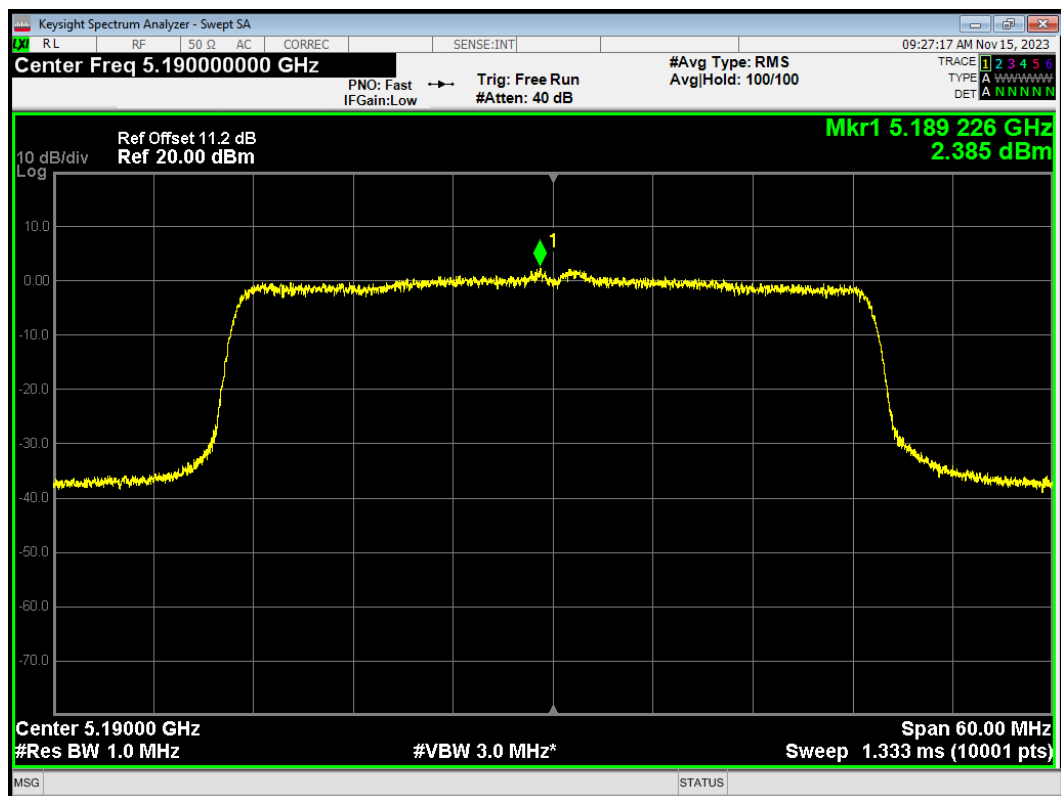


PSD 802.11ax(HE40) 5230MHz

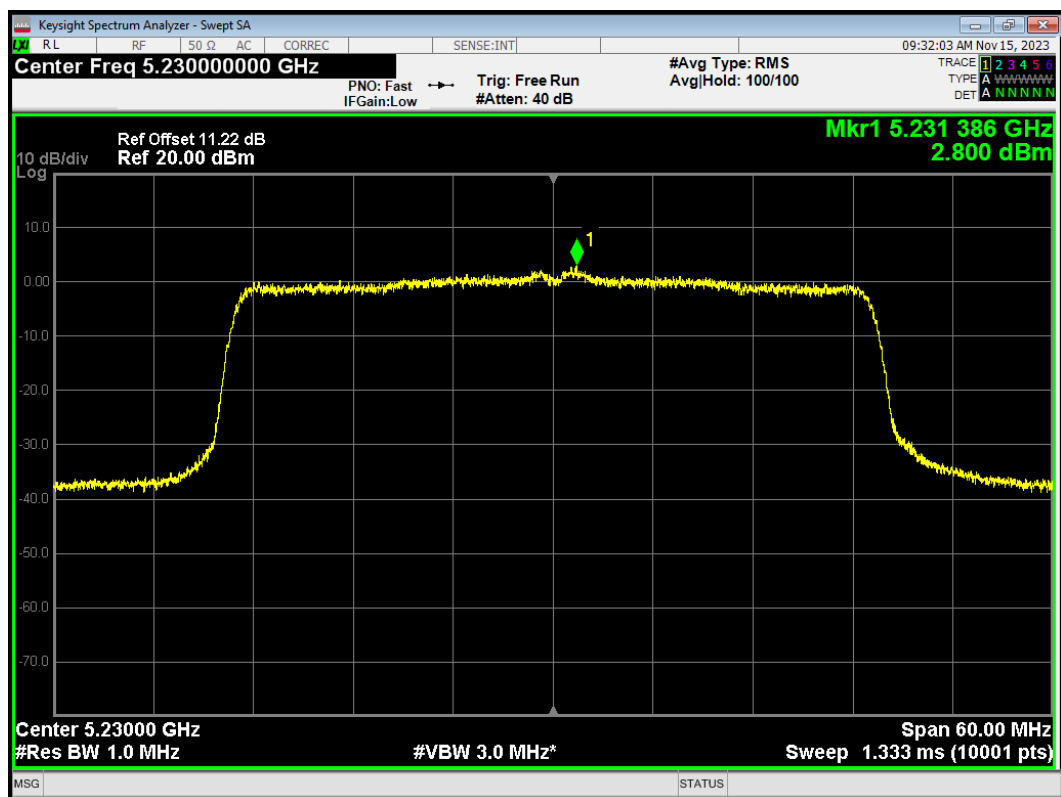


PSD 802.11ax(HE80) 5210MHz

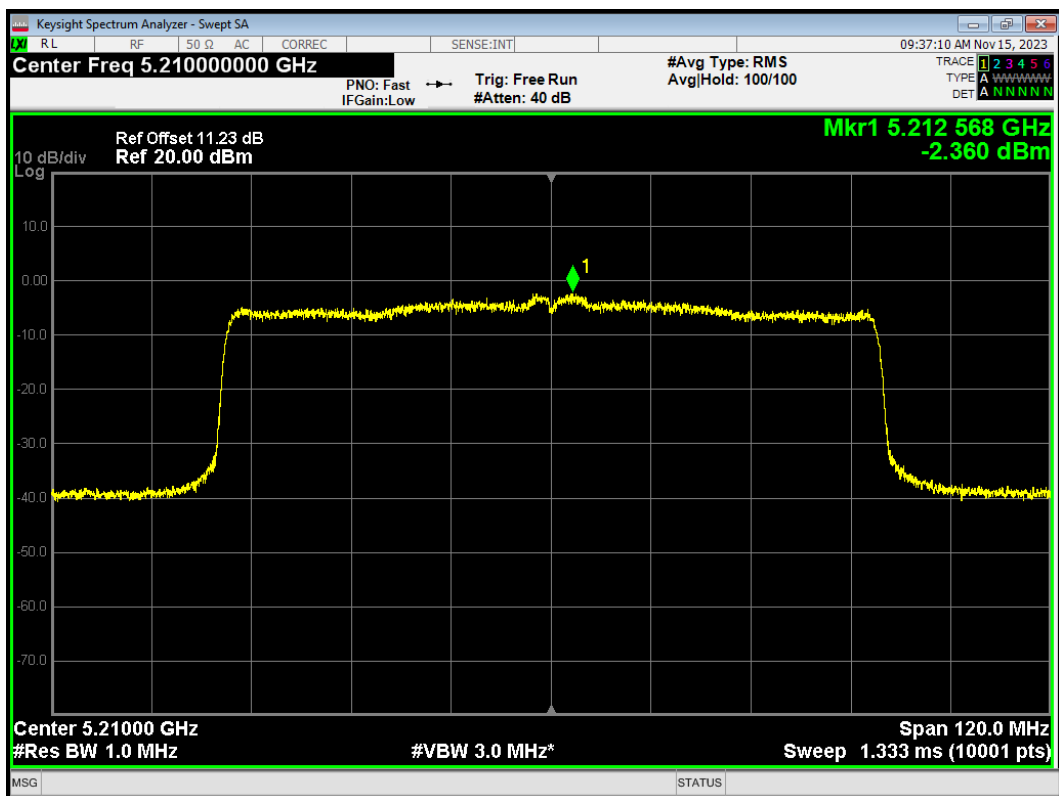


PSD 802.11n(HT20) 5180MHz

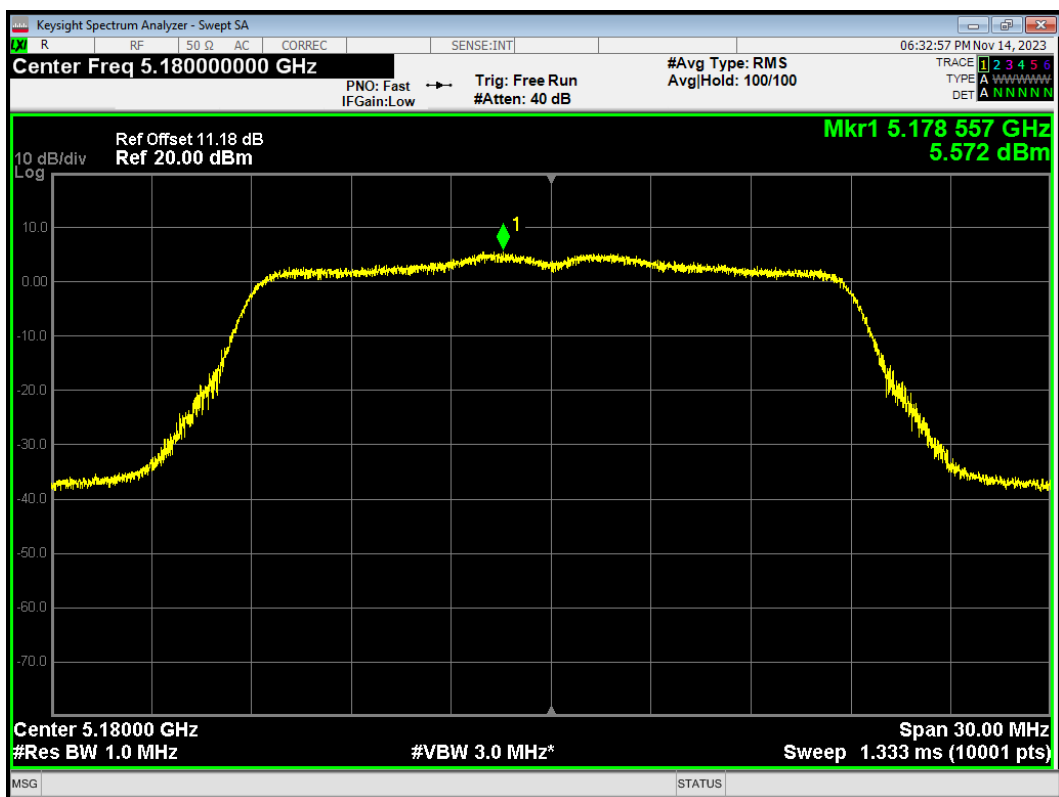


PSD 802.11n(HT20) 5200MHz

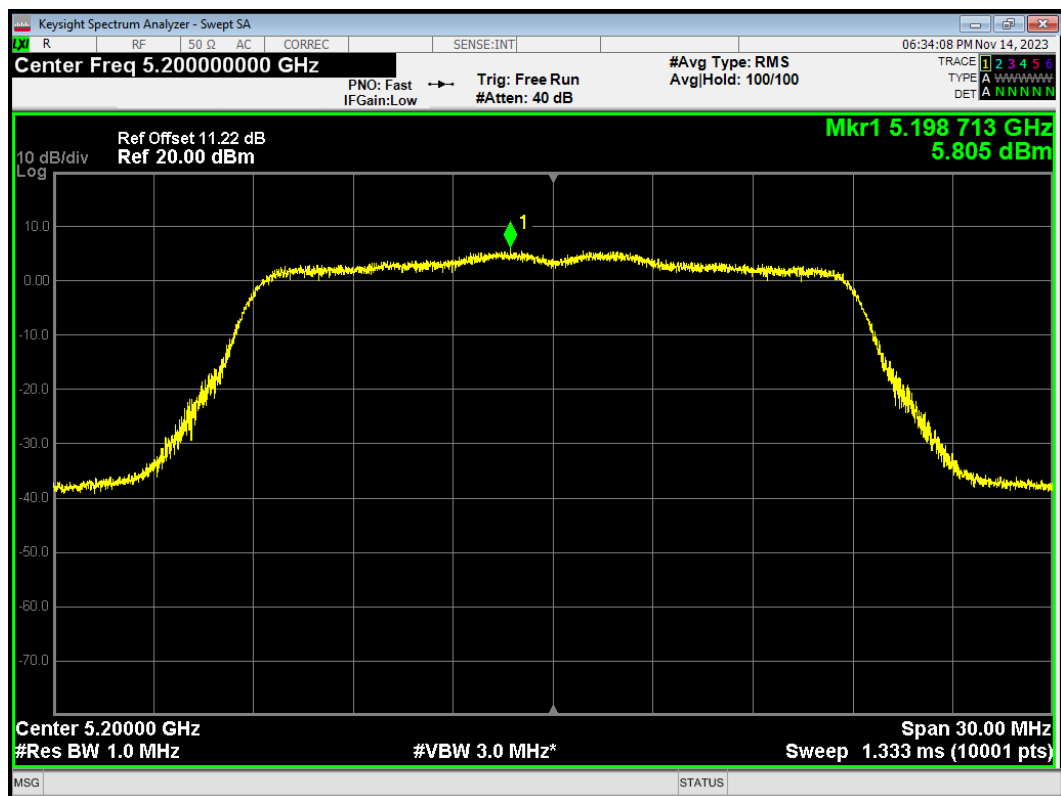


PSD 802.11n(HT20) 5240MHz

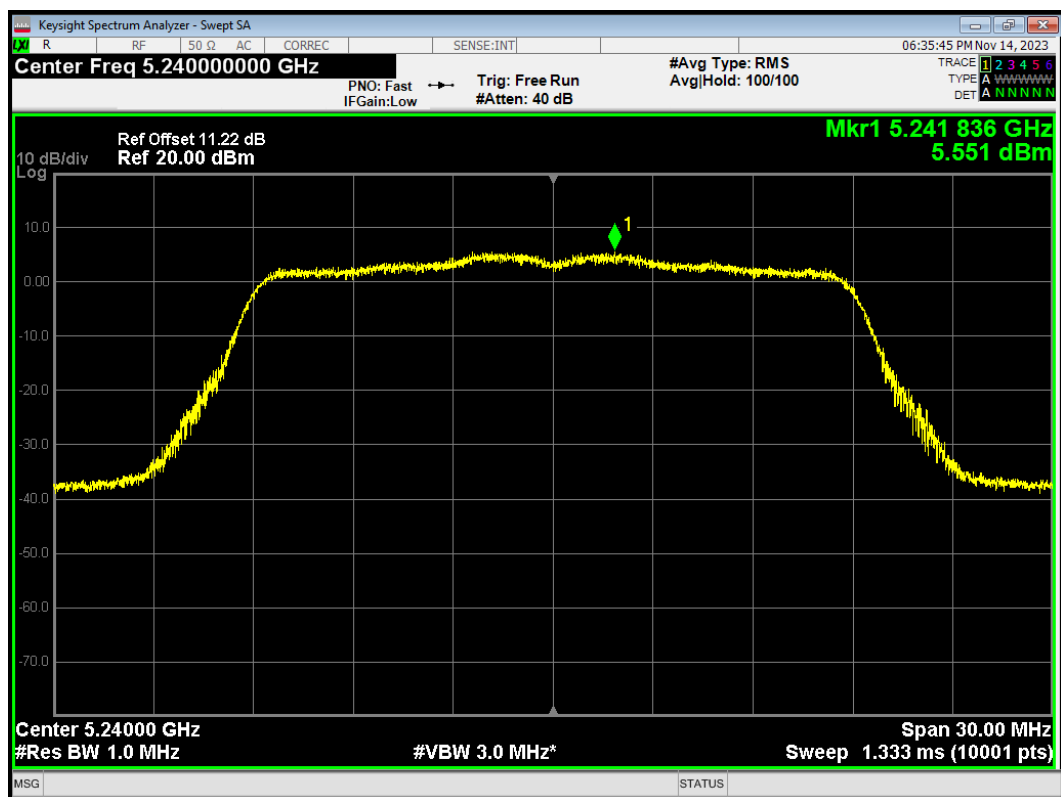

PSD 802.11n(HT40) 5190MHz

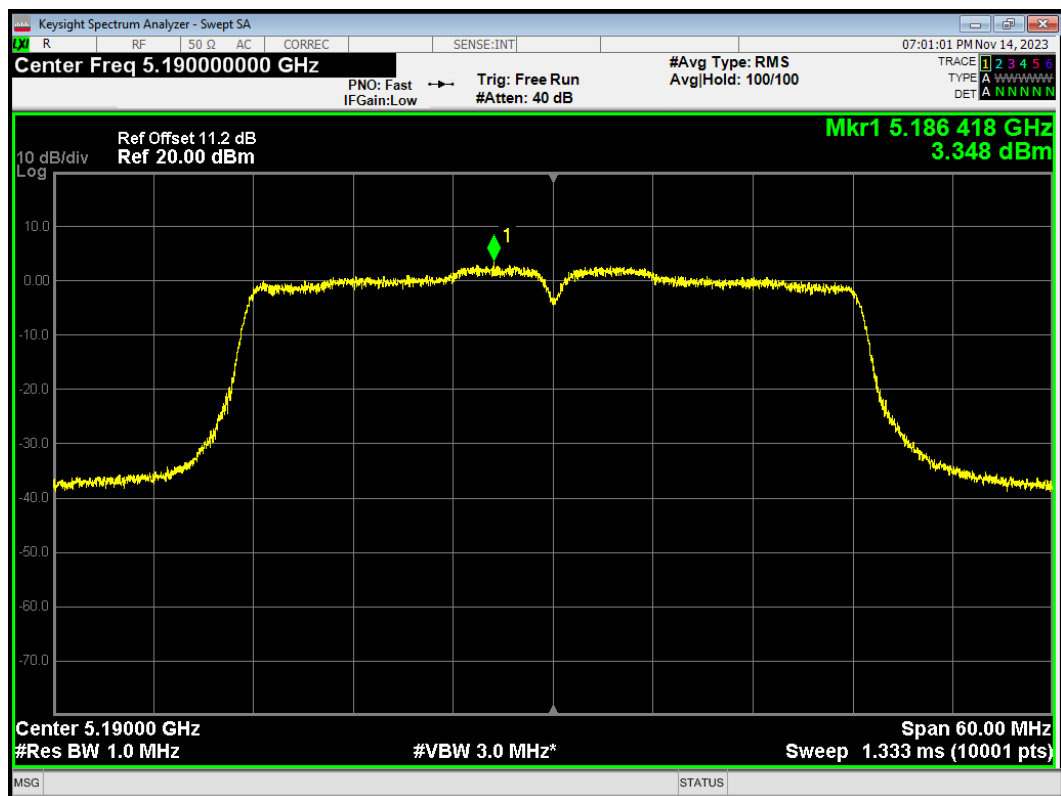


PSD 802.11n(HT40) 5230MHz

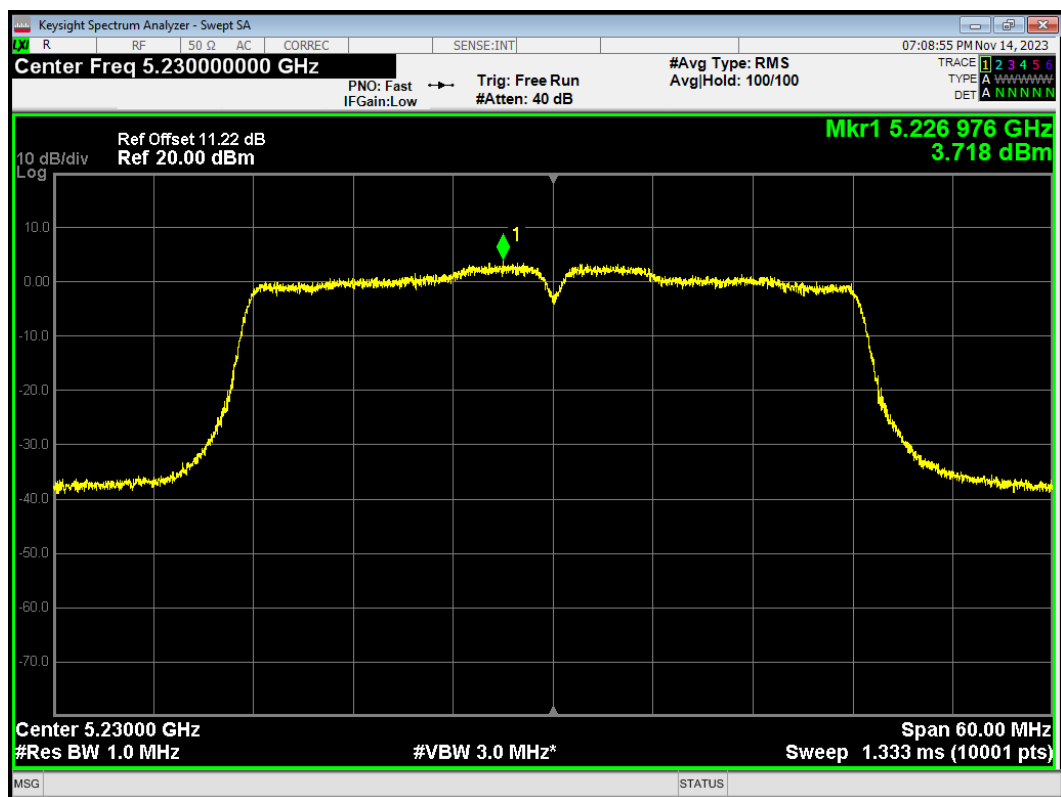


U-NII-2A


PSD 802.11a 5260MHz

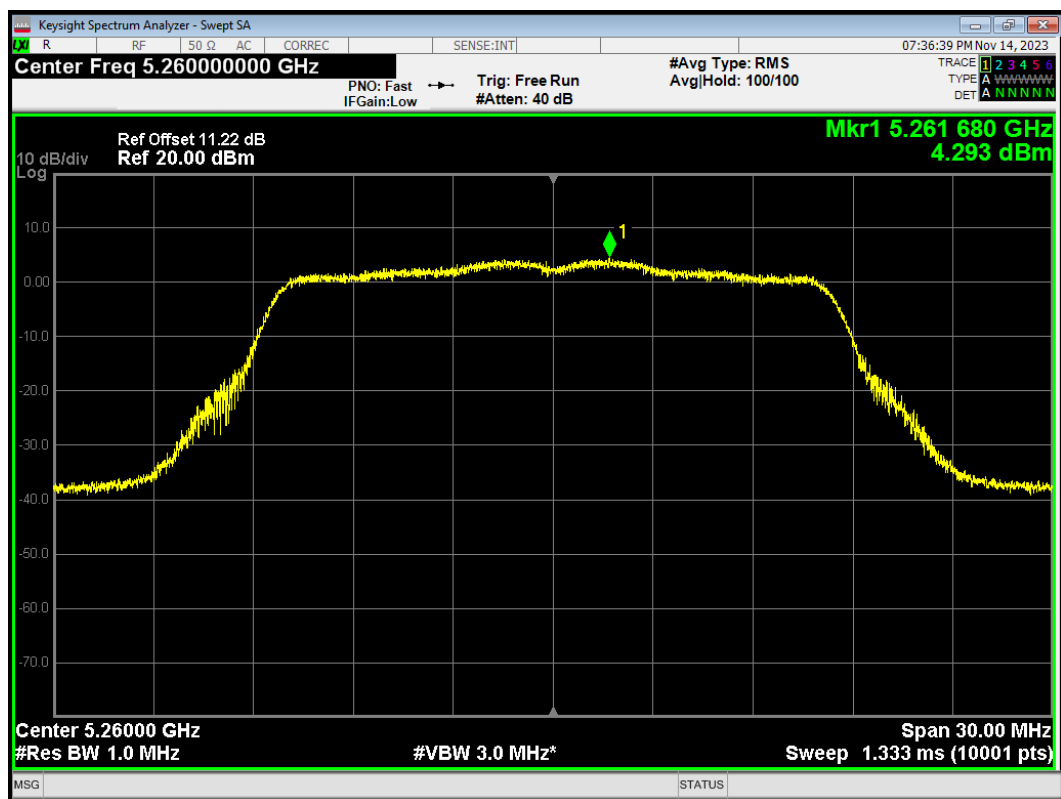


PSD 802.11a 5300MHz

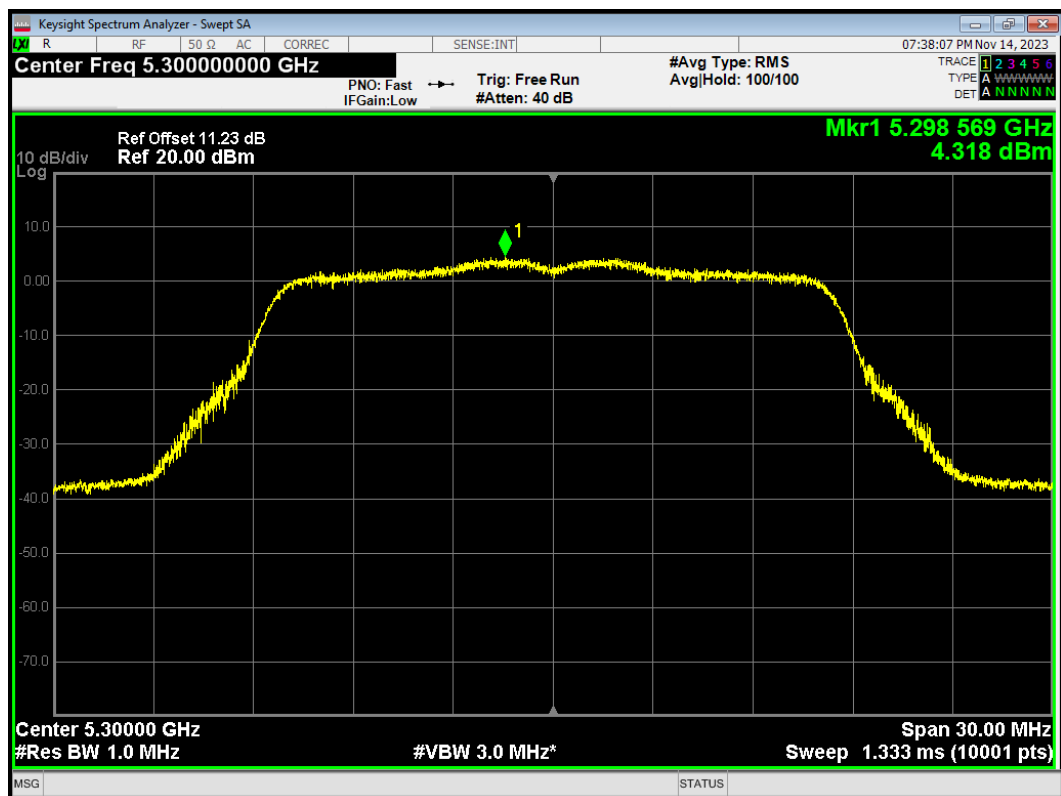


PSD 802.11a 5320MHz

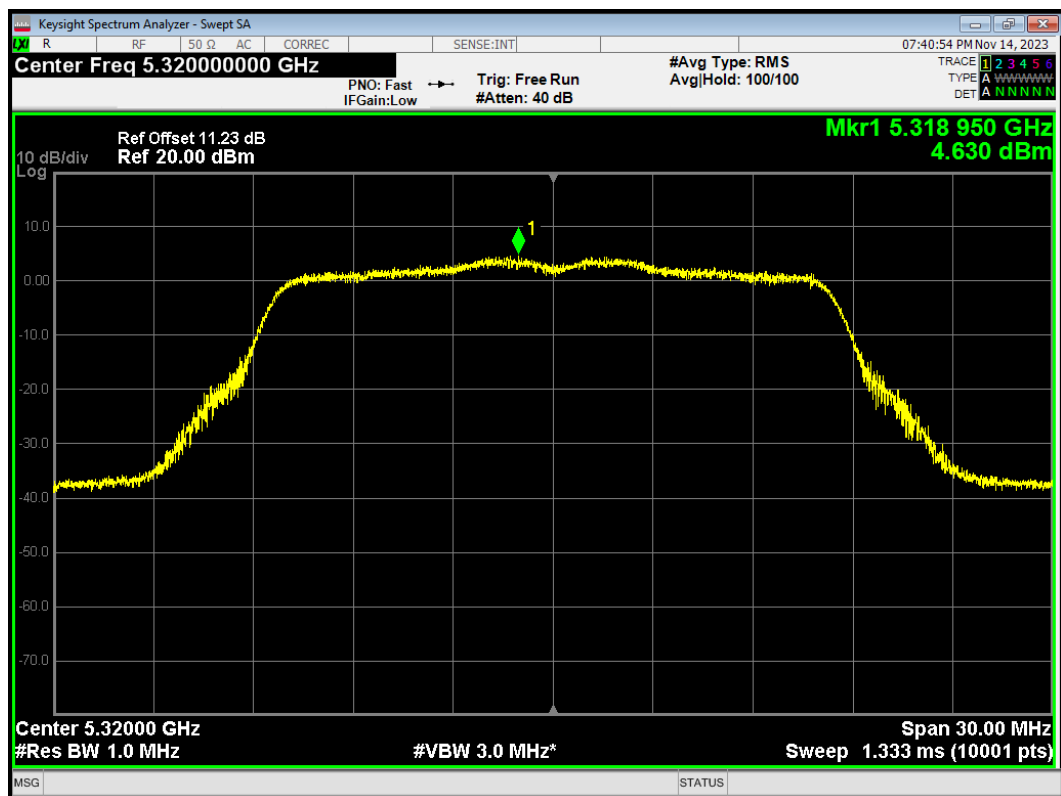


PSD 802.11ac(VHT20) 5260MHz

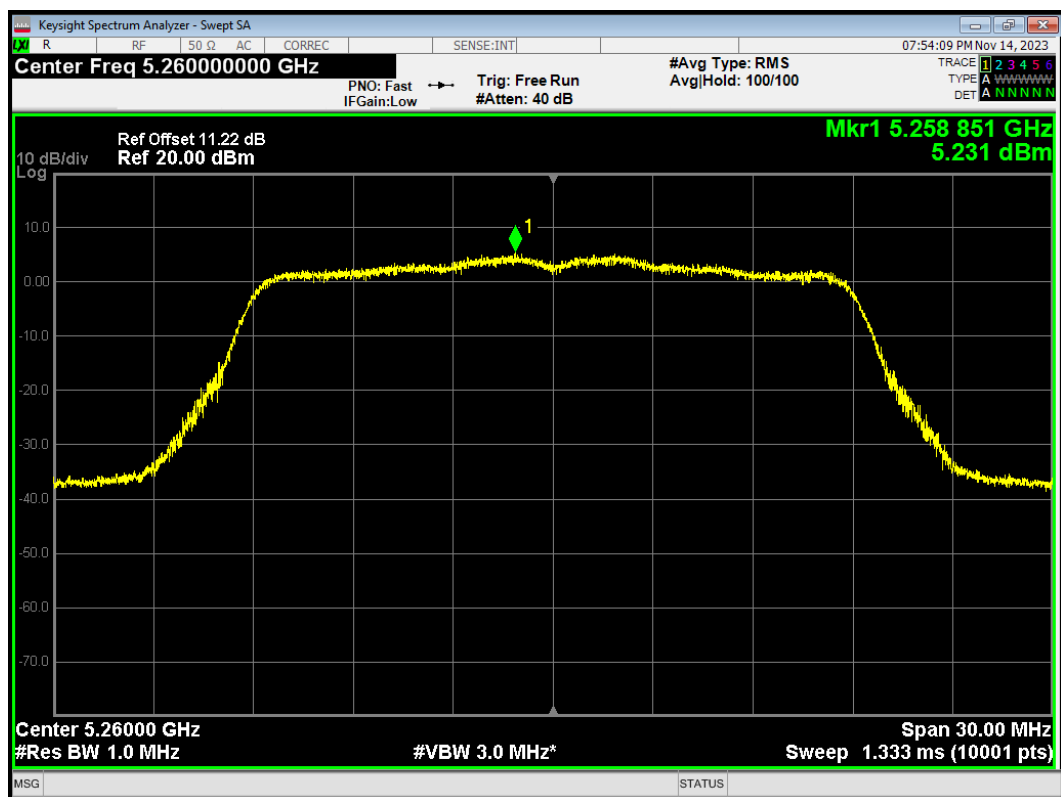


PSD 802.11ac(VHT20) 5300MHz

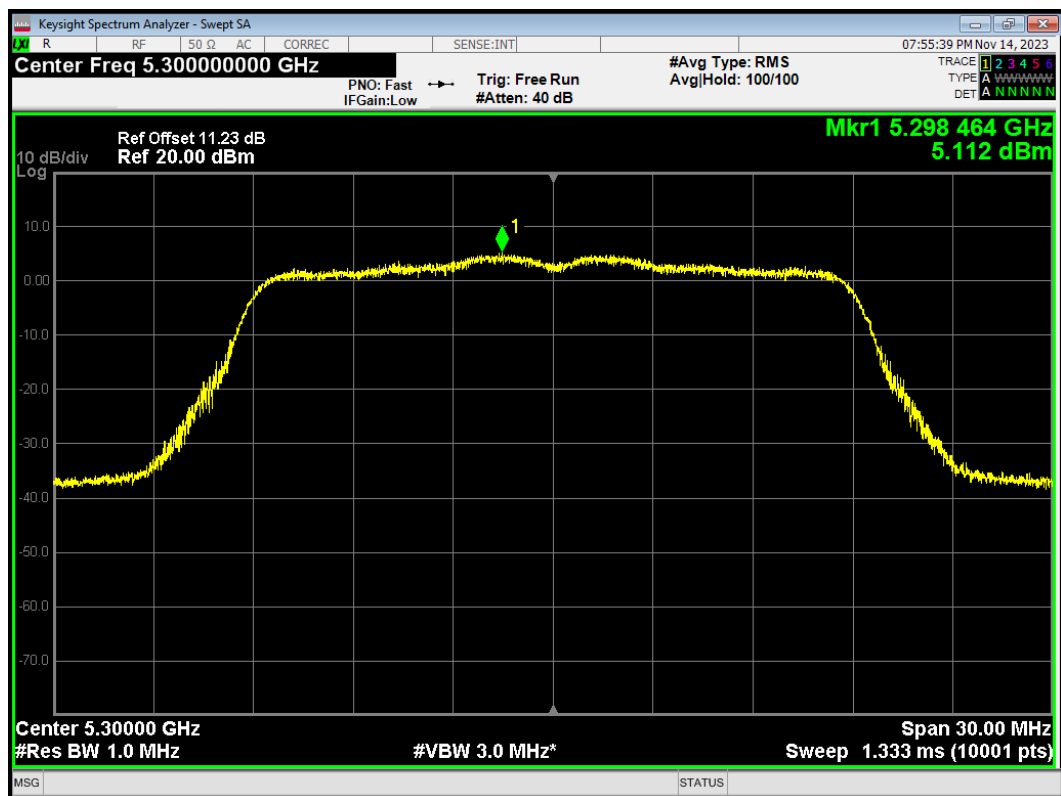


PSD 802.11ac(VHT20) 5320MHz

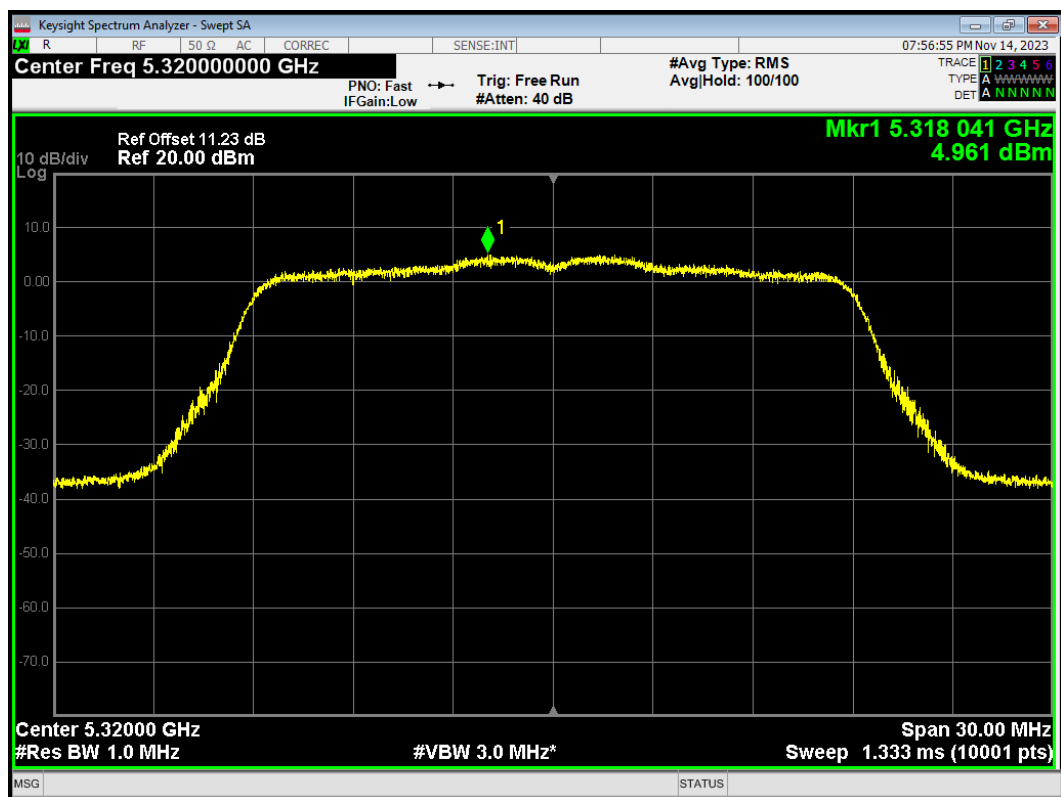


PSD 802.11ac(VHT40) 5270MHz

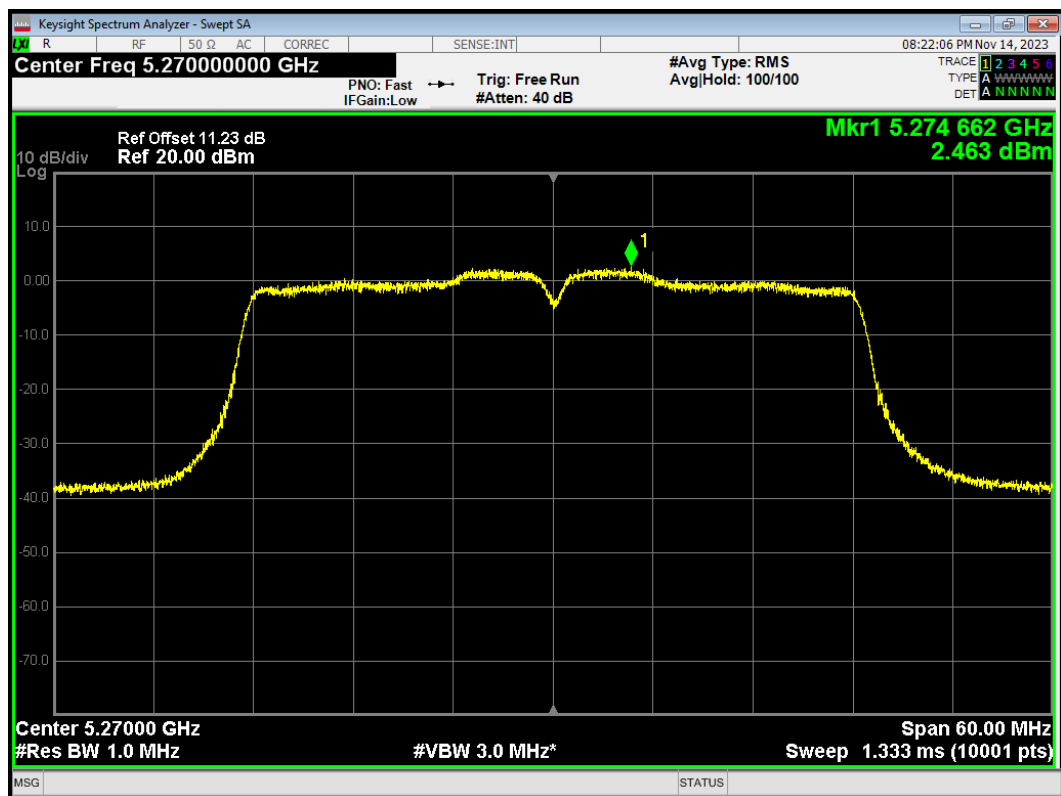


PSD 802.11ac(VHT40) 5310MHz

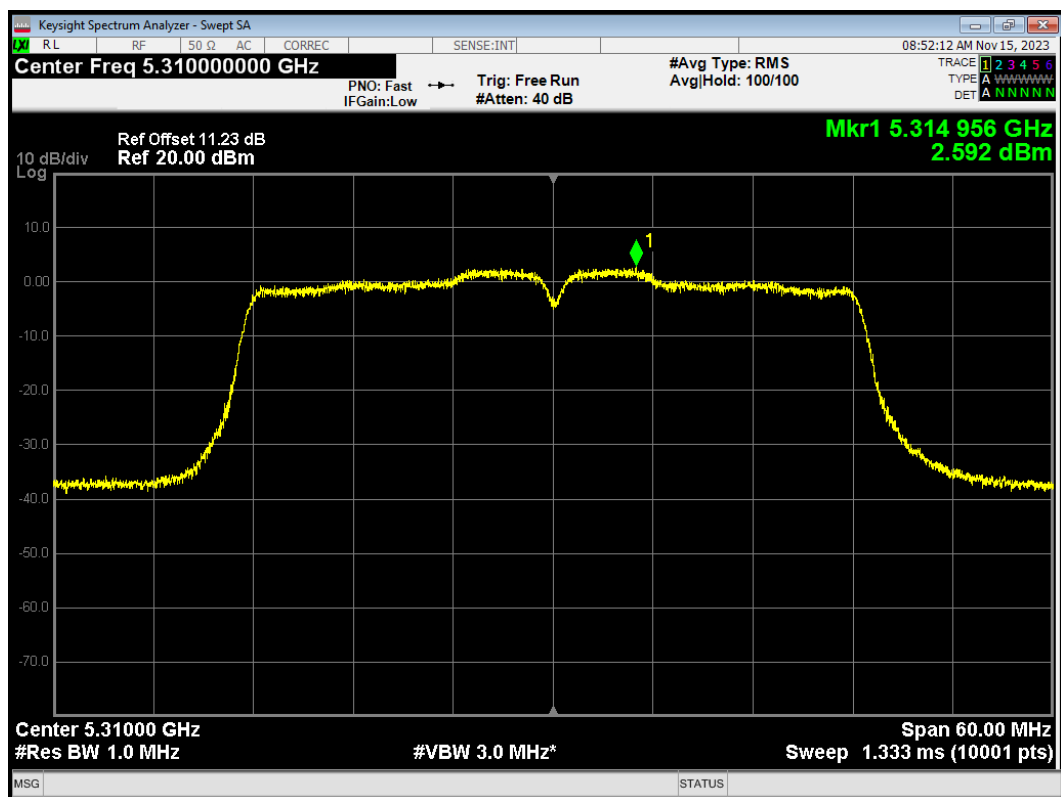


PSD 802.11ac(VHT80) 5290MHz

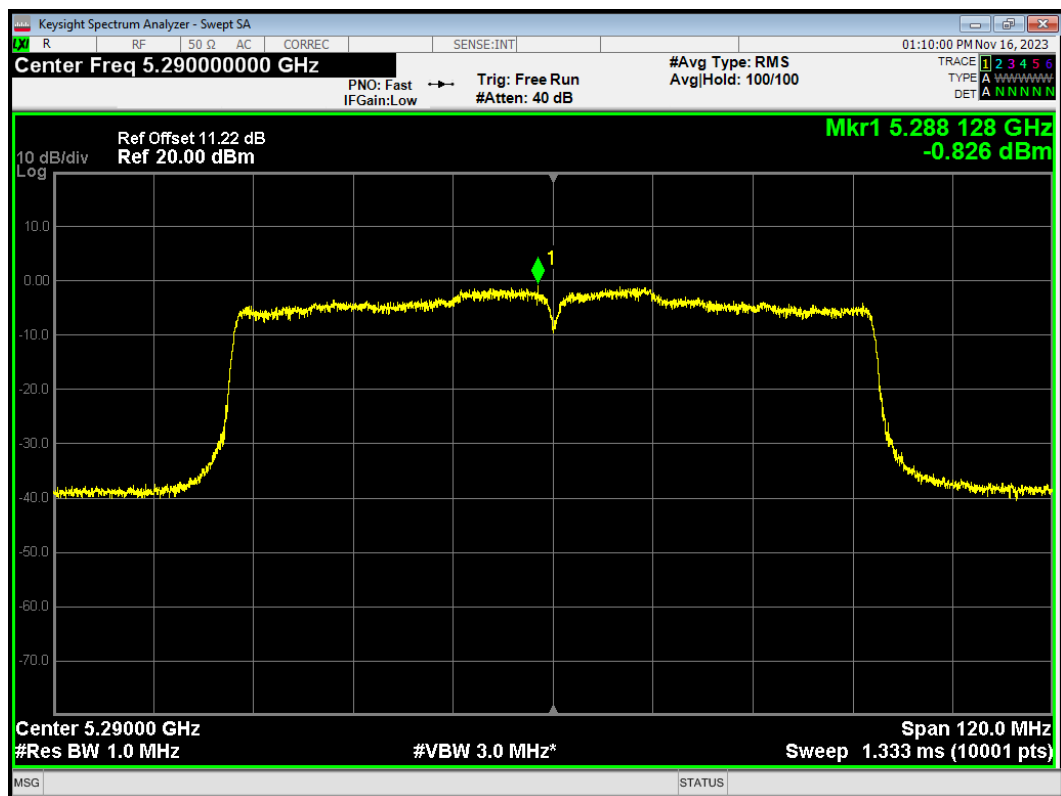


PSD 802.11ax(HE20) 5260MHz

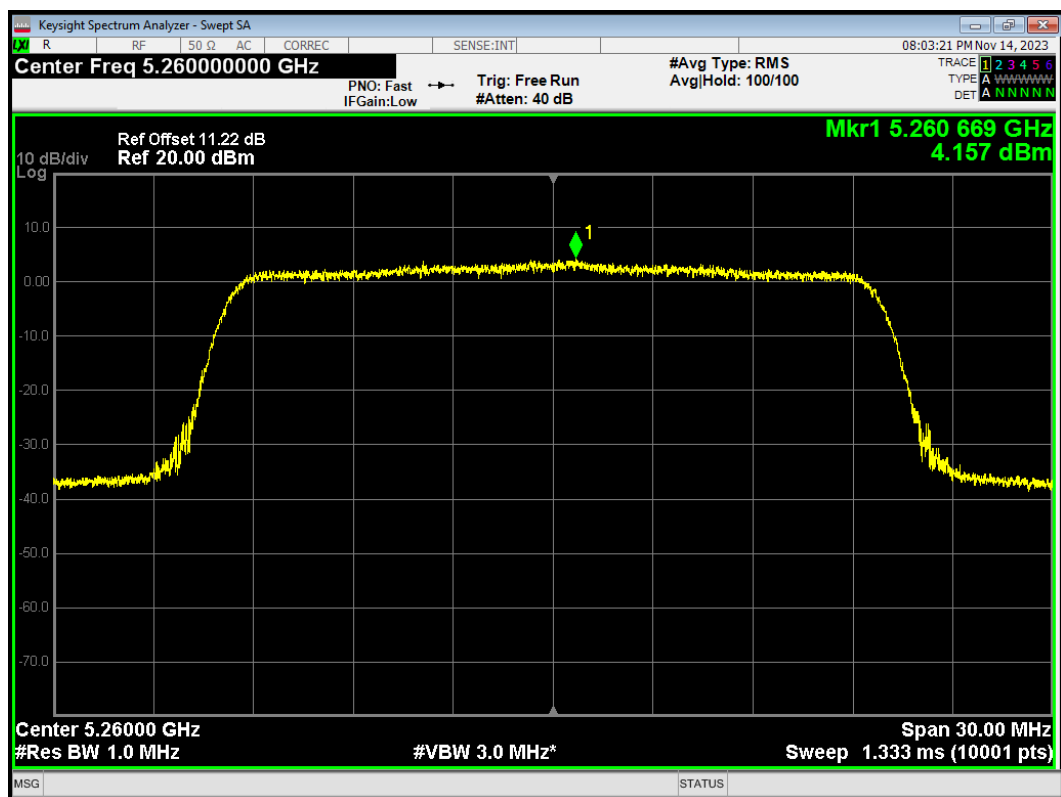


PSD 802.11ax(HE20) 5300MHz

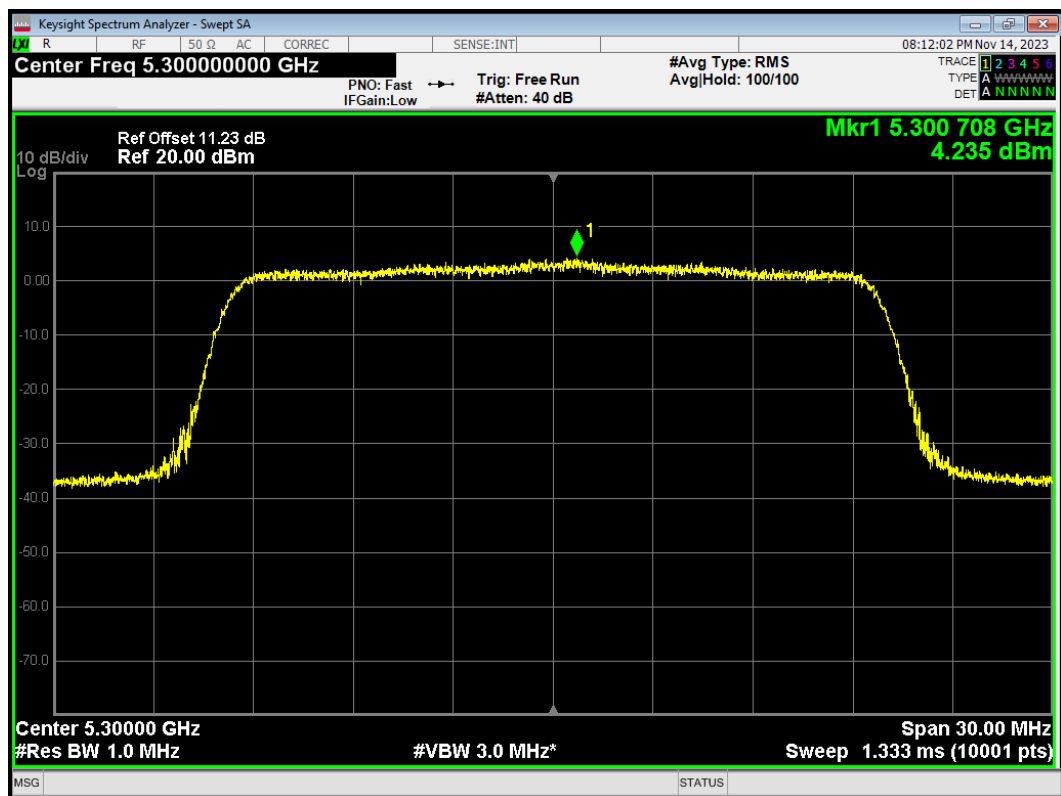


PSD 802.11ax(HE20) 5320MHz

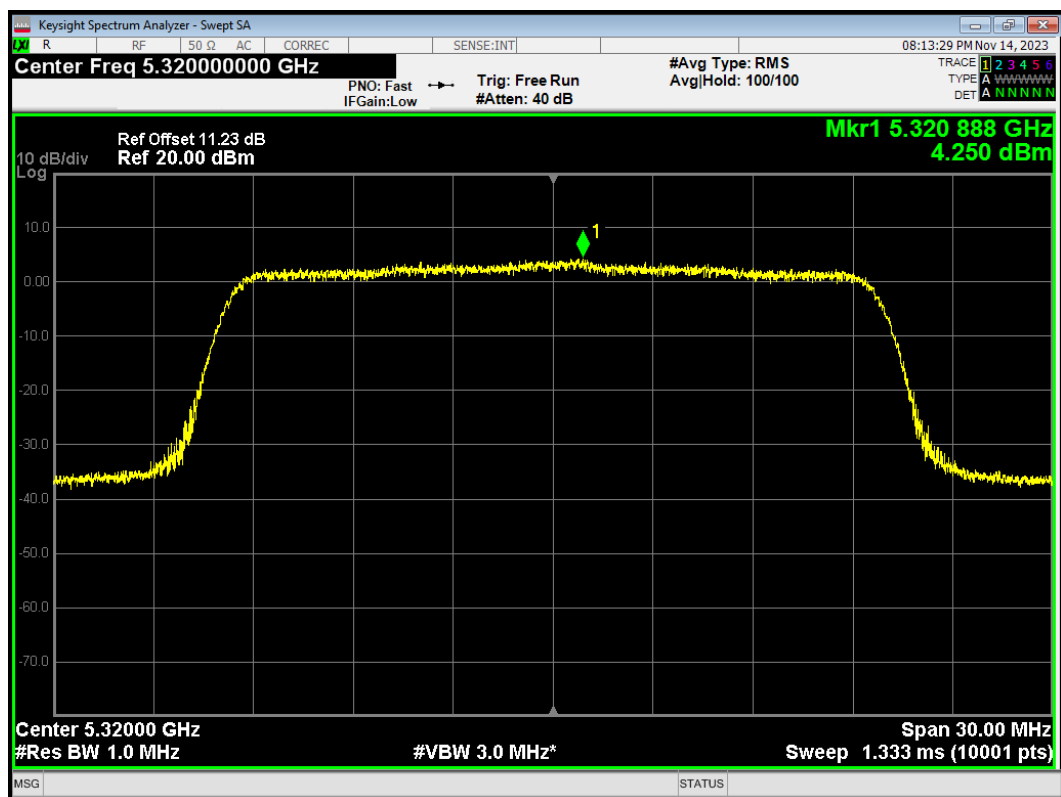


PSD 802.11ax(HE40) 5270MHz

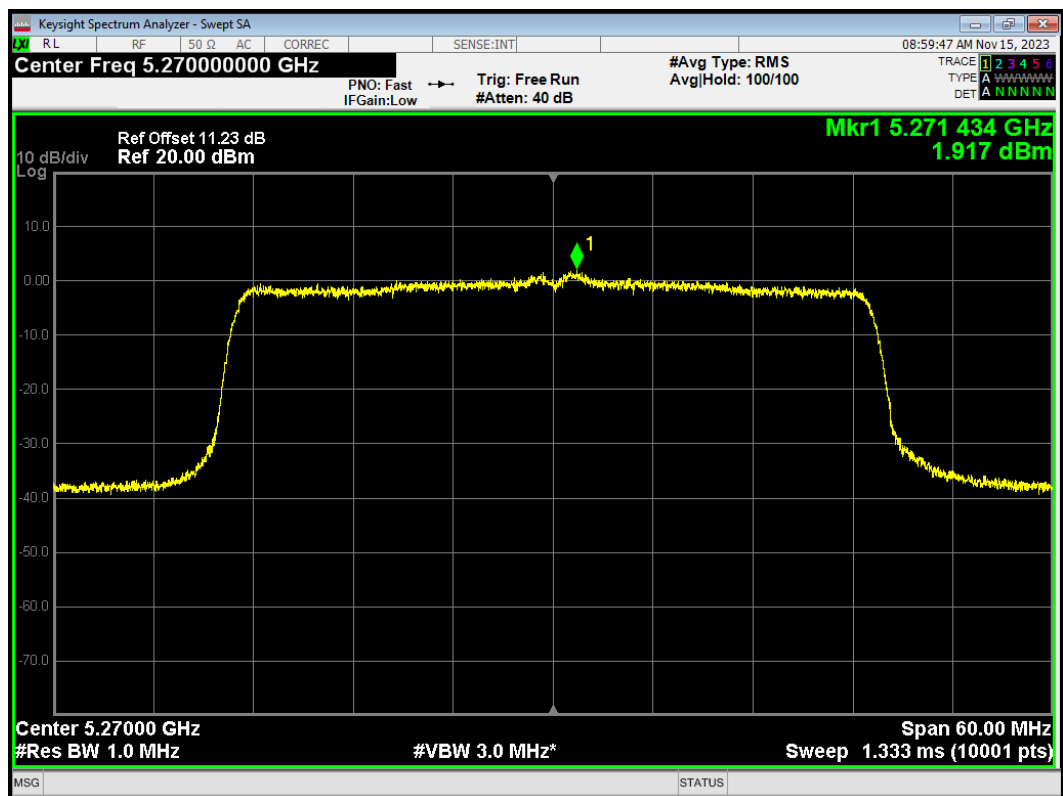


PSD 802.11ax(HE40) 5310MHz

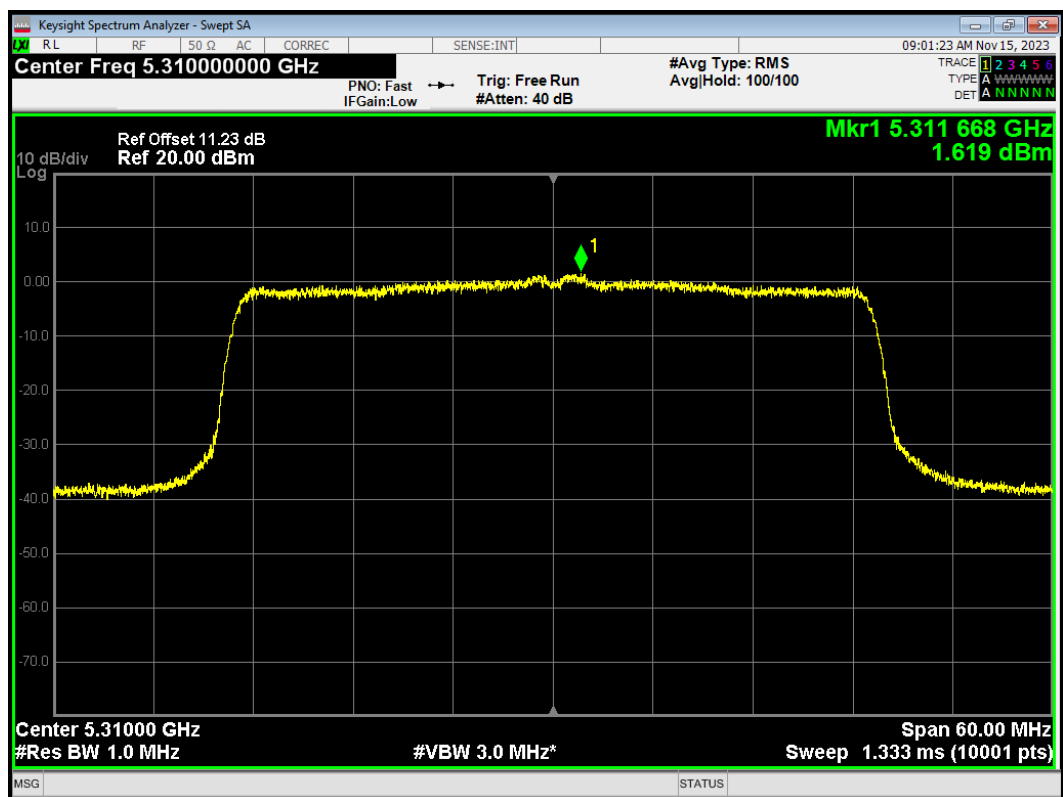


PSD 802.11ax(HE80) 5290MHz

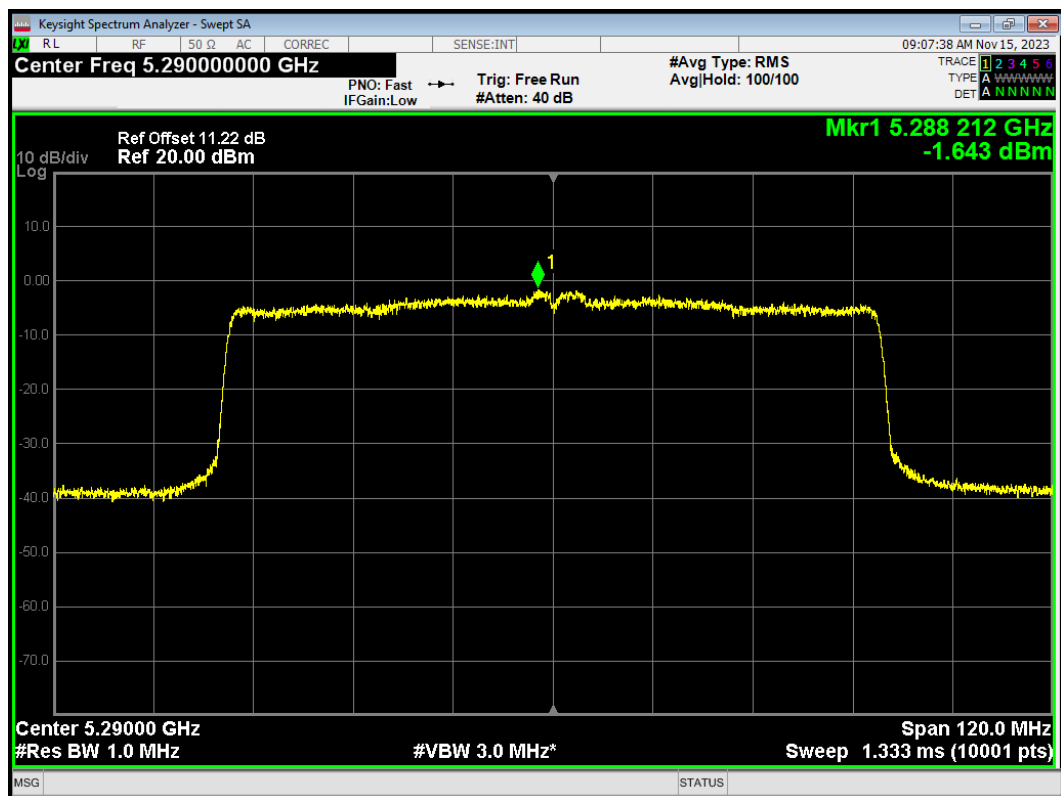


PSD 802.11n(HT20) 5260MHz

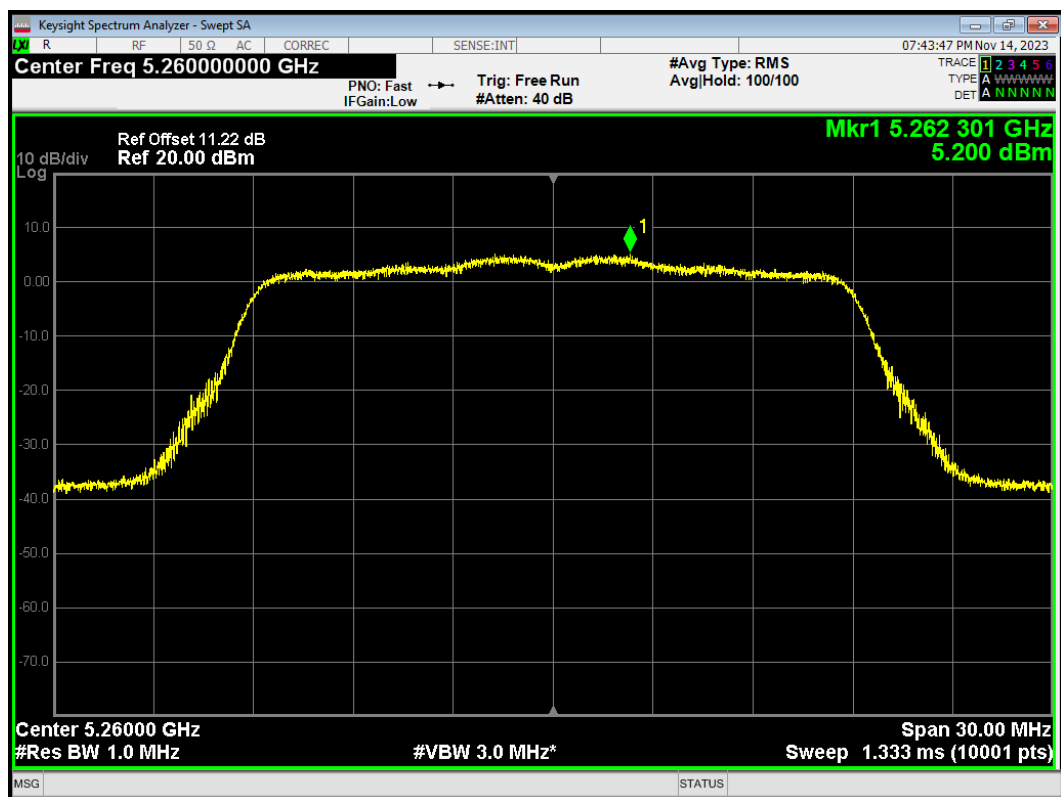


PSD 802.11n(HT20) 5300MHz

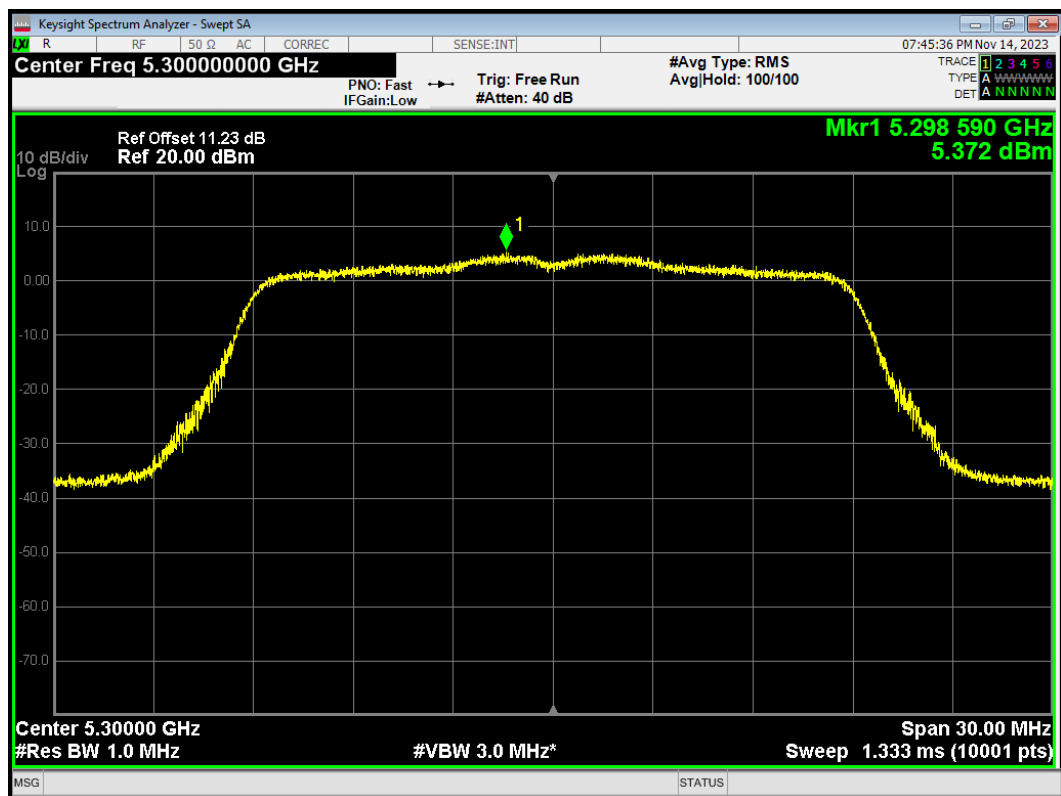


PSD 802.11n(HT20) 5320MHz

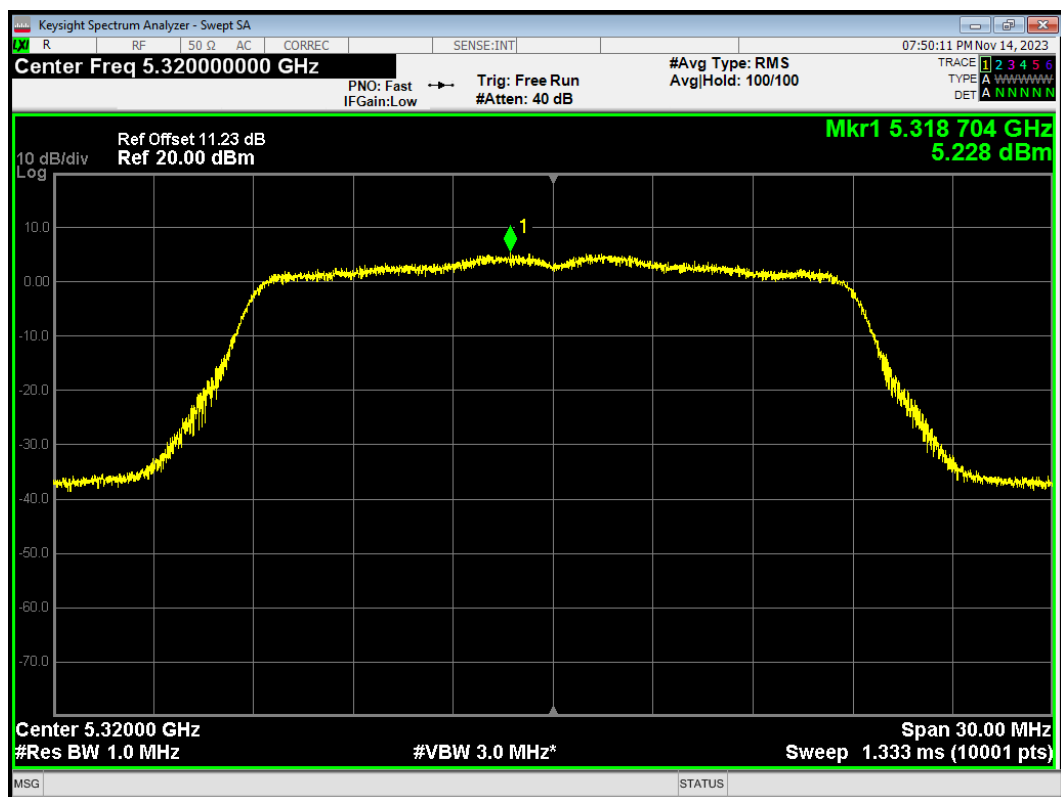

PSD 802.11n(HT40) 5270MHz

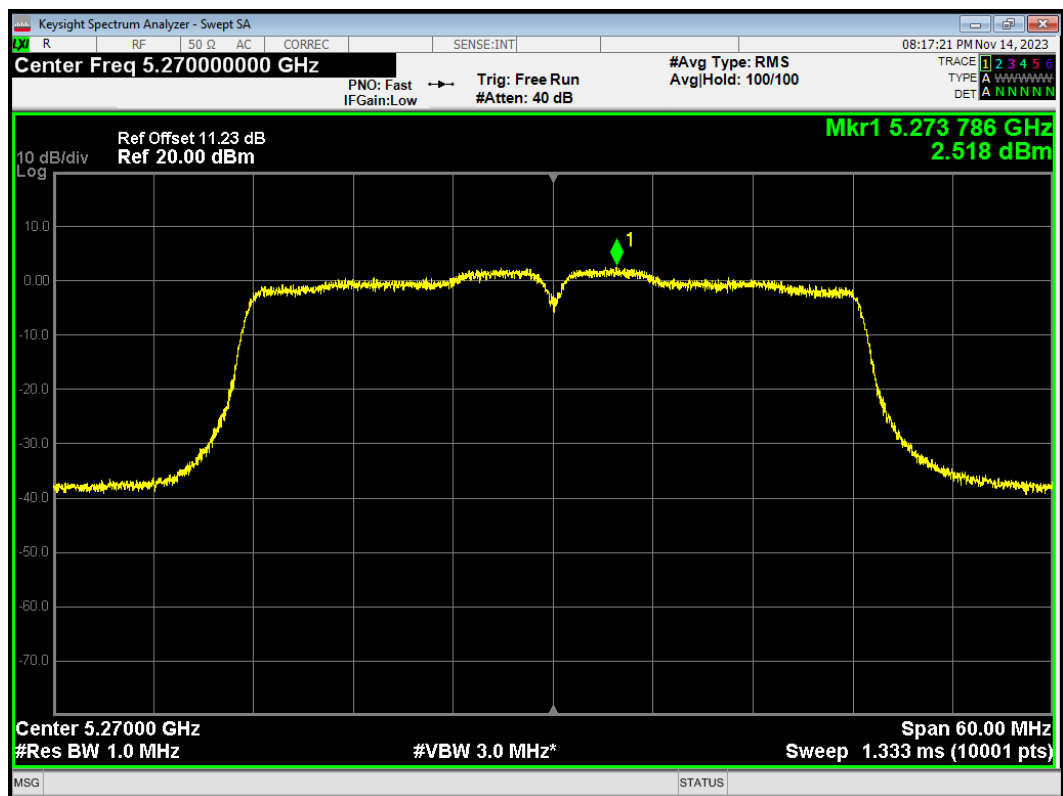


PSD 802.11n(HT40) 5310MHz

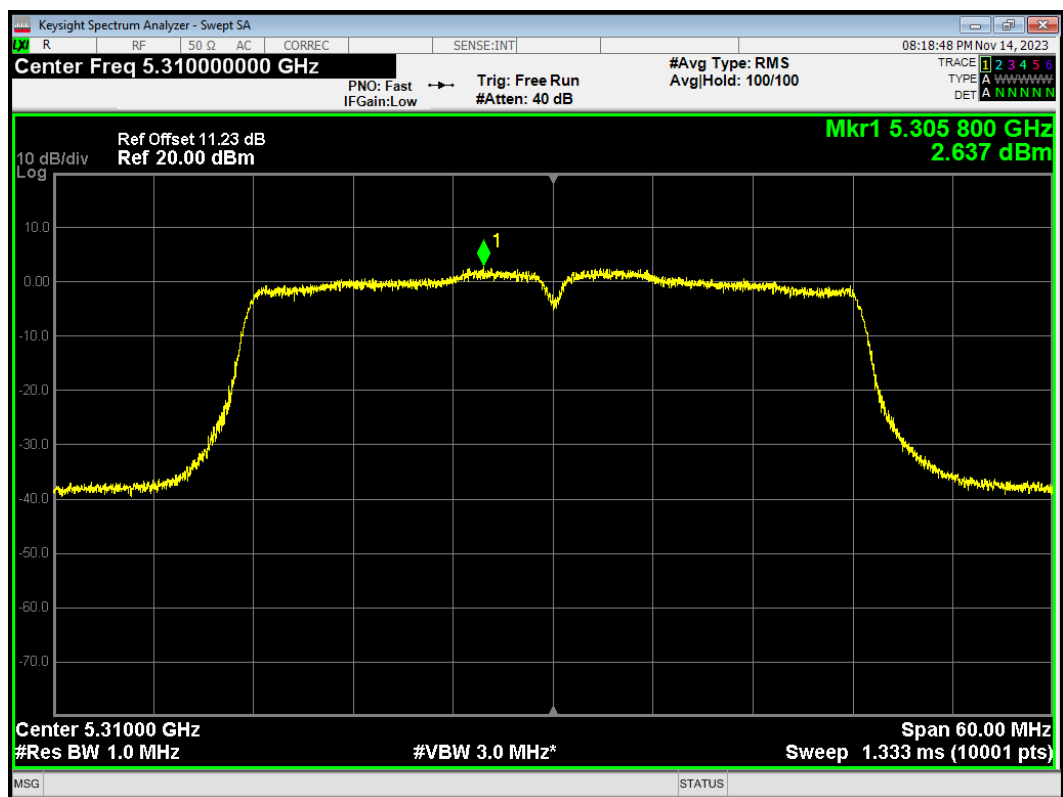


U-NII-2C


PSD 802.11a 5500MHz

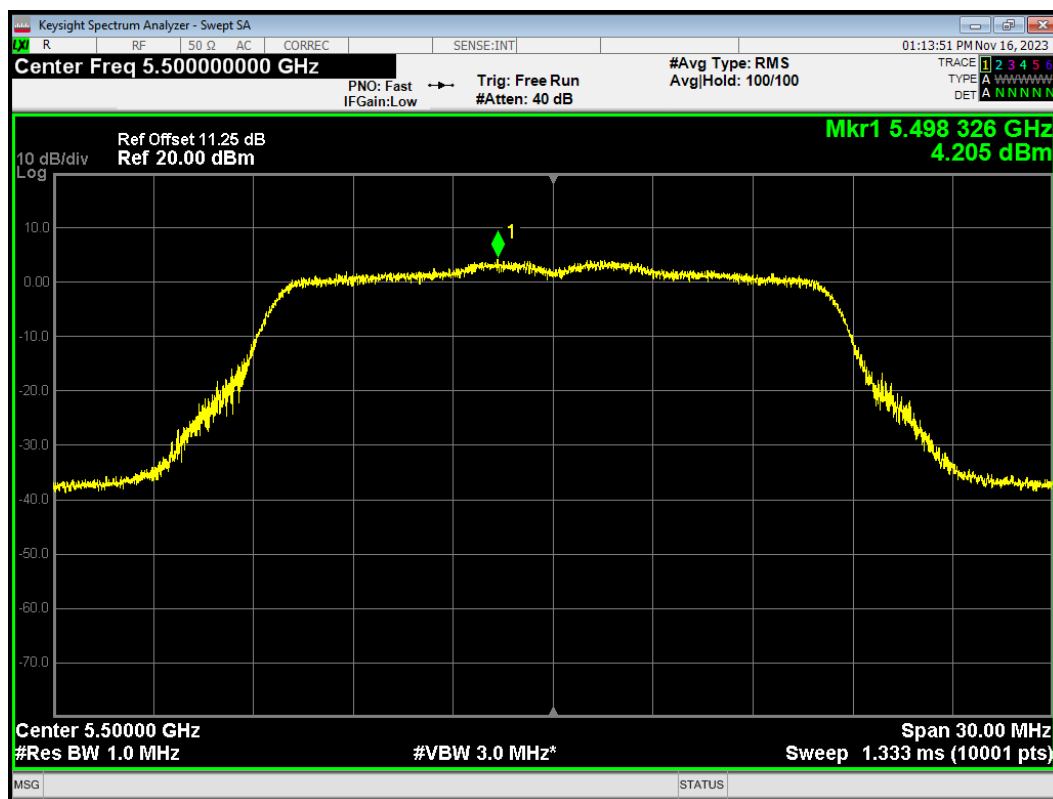


PSD 802.11a 5580MHz

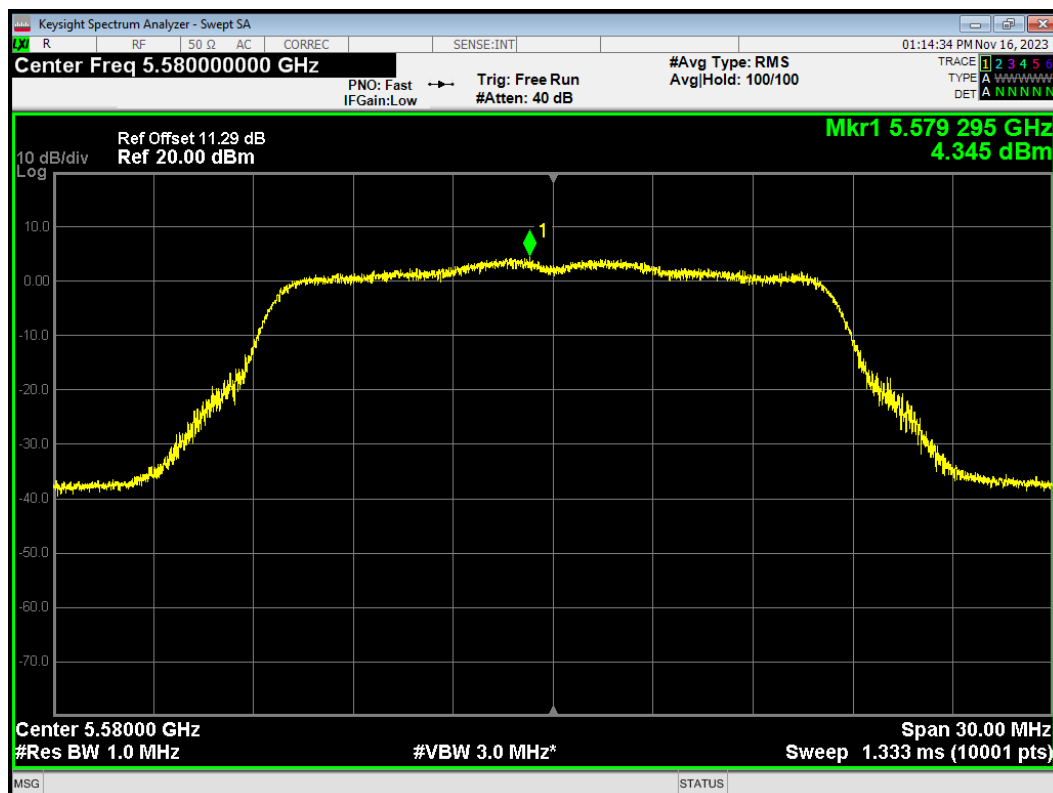


PSD 802.11a 5700MHz

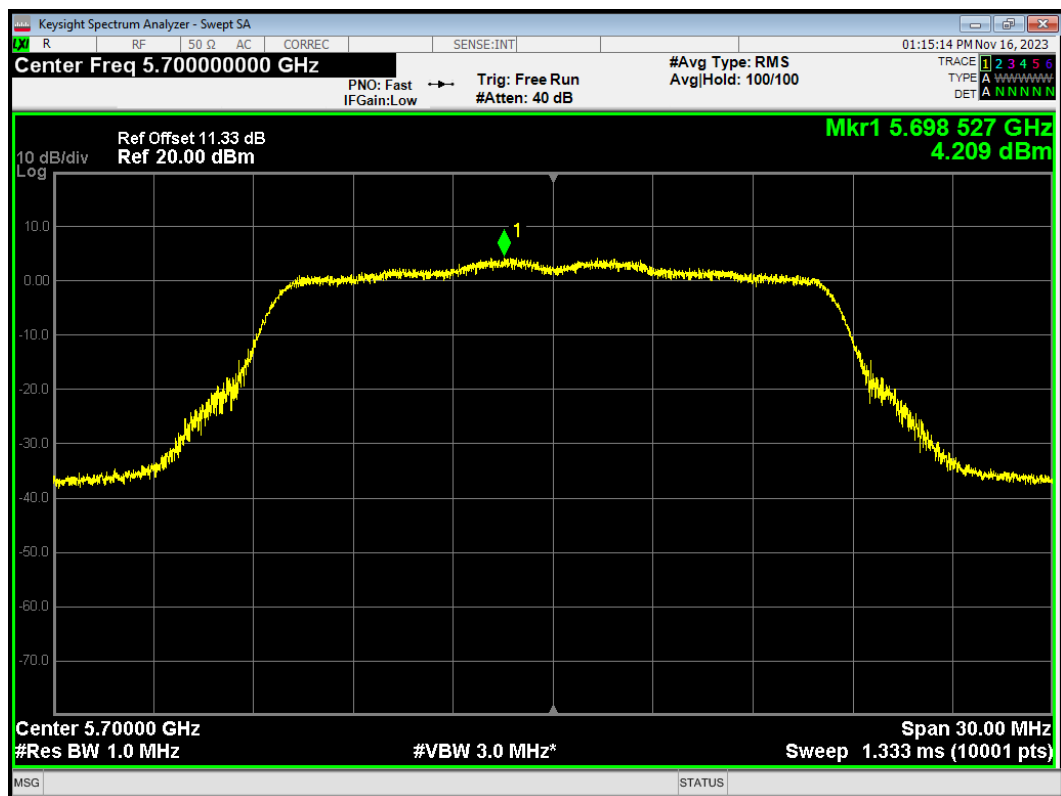


PSD 802.11a 5720MHz

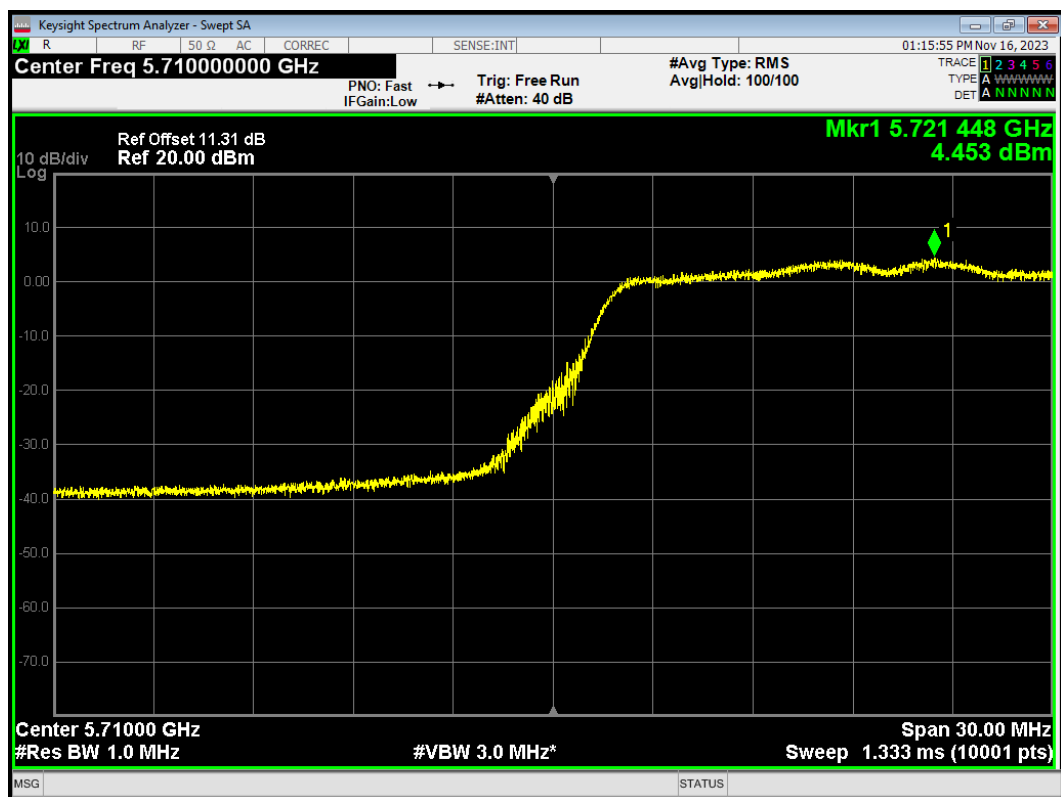


PSD 802.11ac(VHT20) 5500MHz

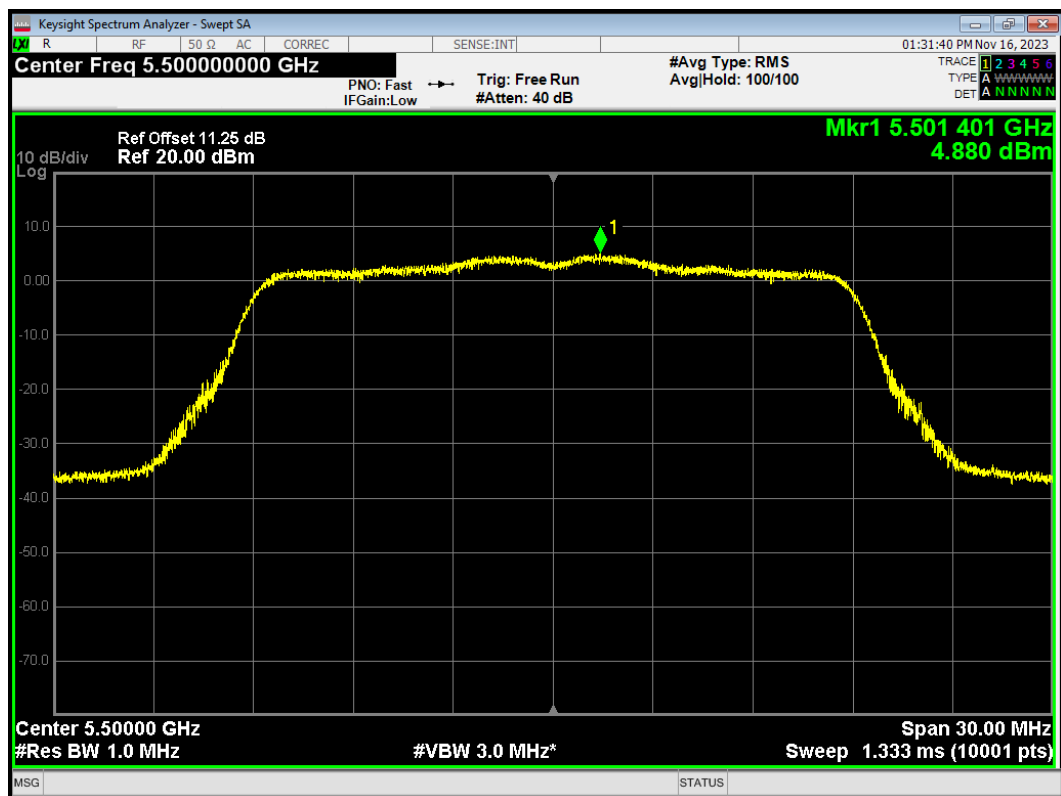


PSD 802.11ac(VHT20) 5580MHz

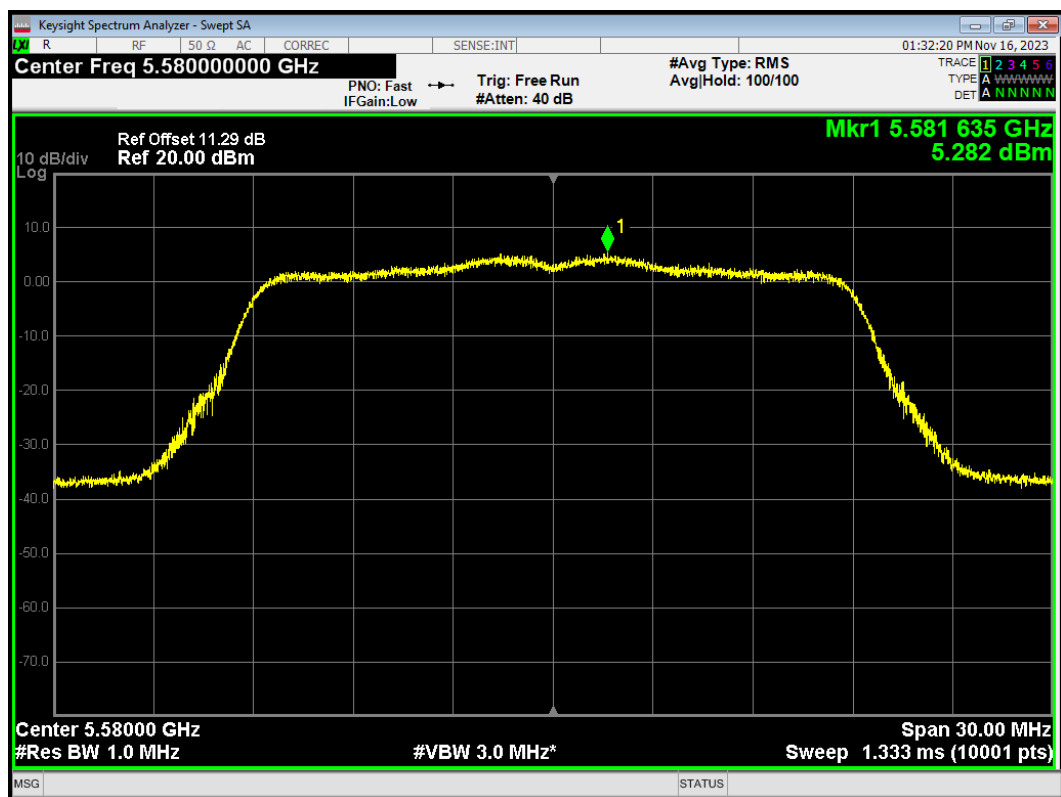


PSD 802.11ac(VHT20) 5700MHz

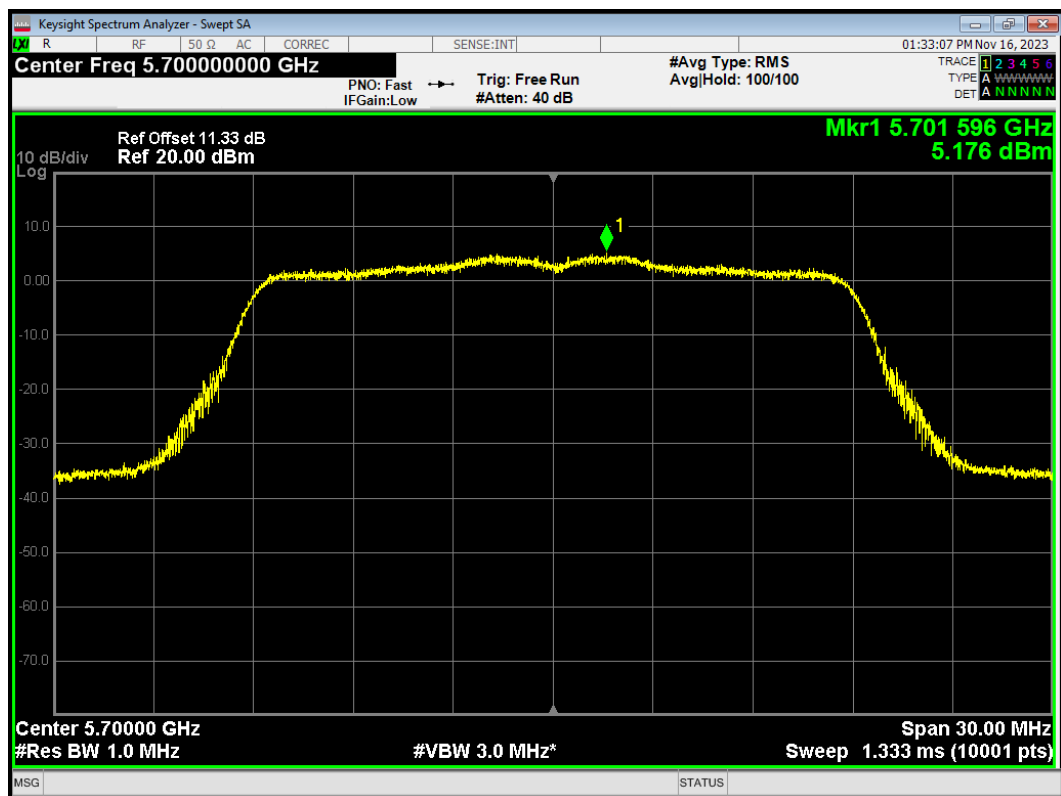


PSD 802.11ac(VHT20) 5720MHz

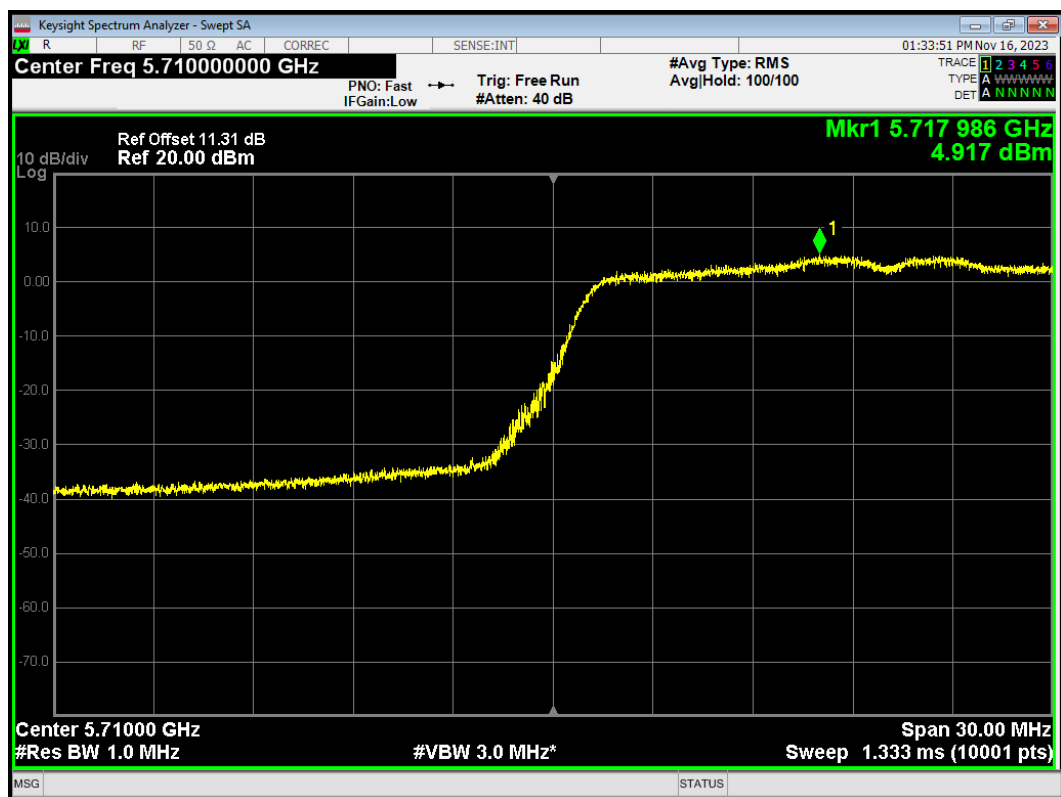


PSD 802.11ac(VHT40) 5510MHz

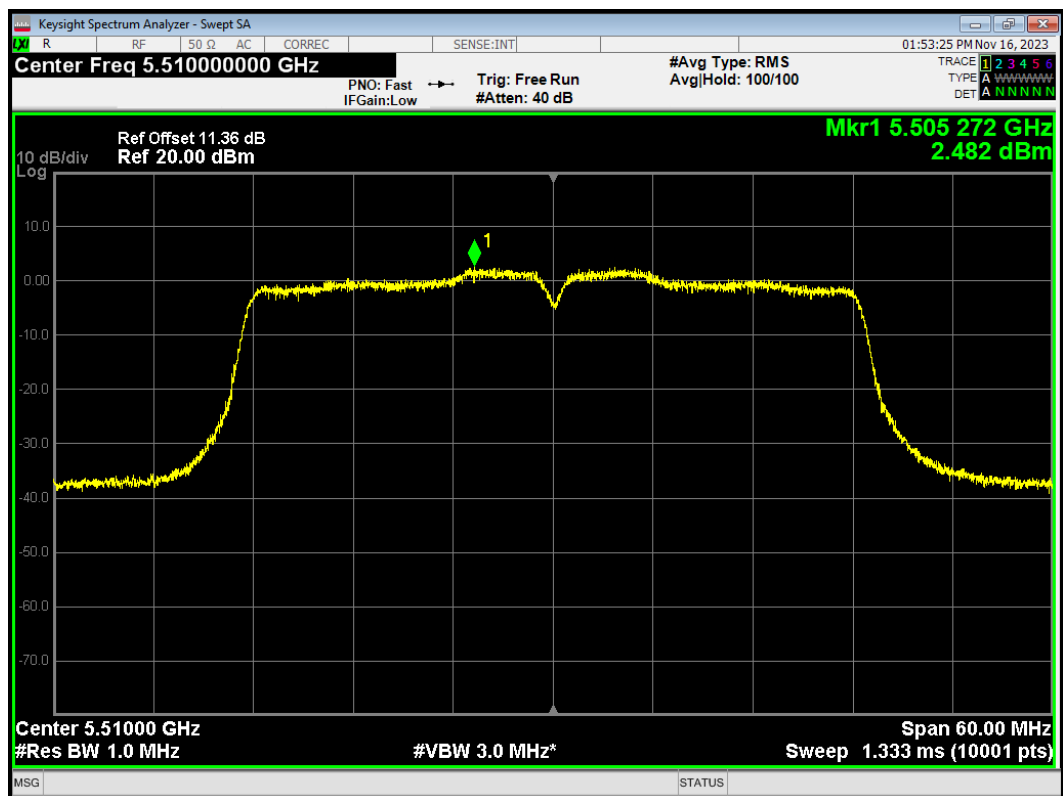


PSD 802.11ac(VHT40) 5550MHz

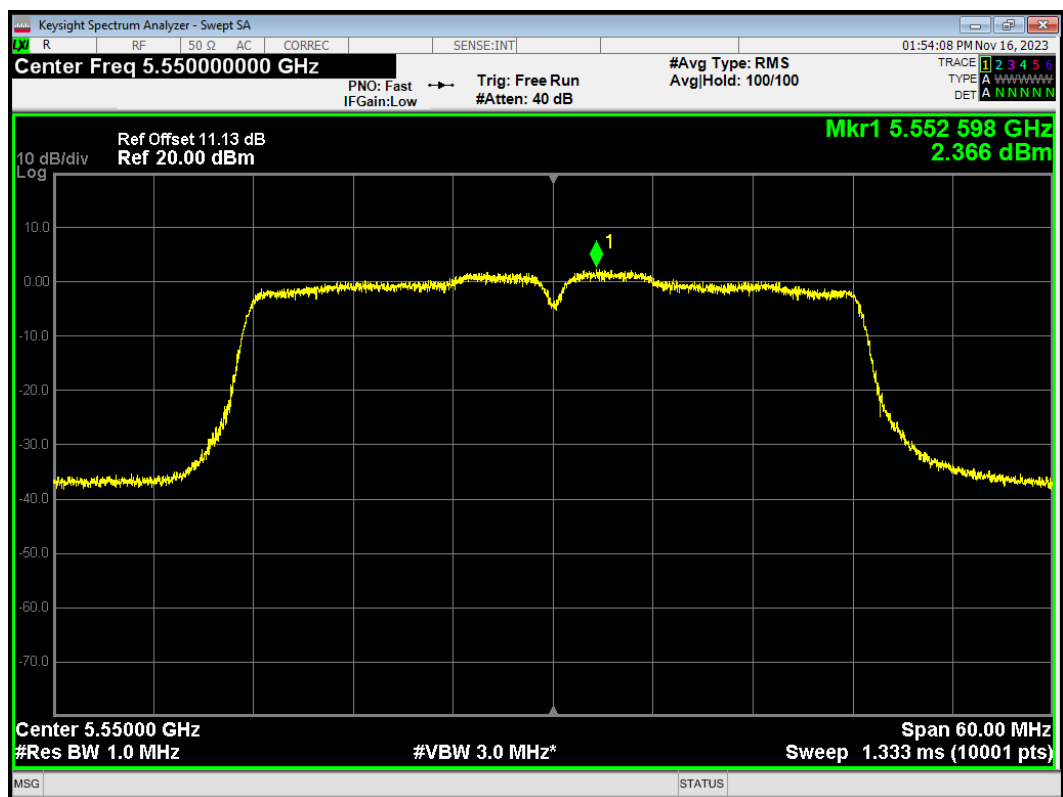


PSD 802.11ac(VHT40) 5670MHz

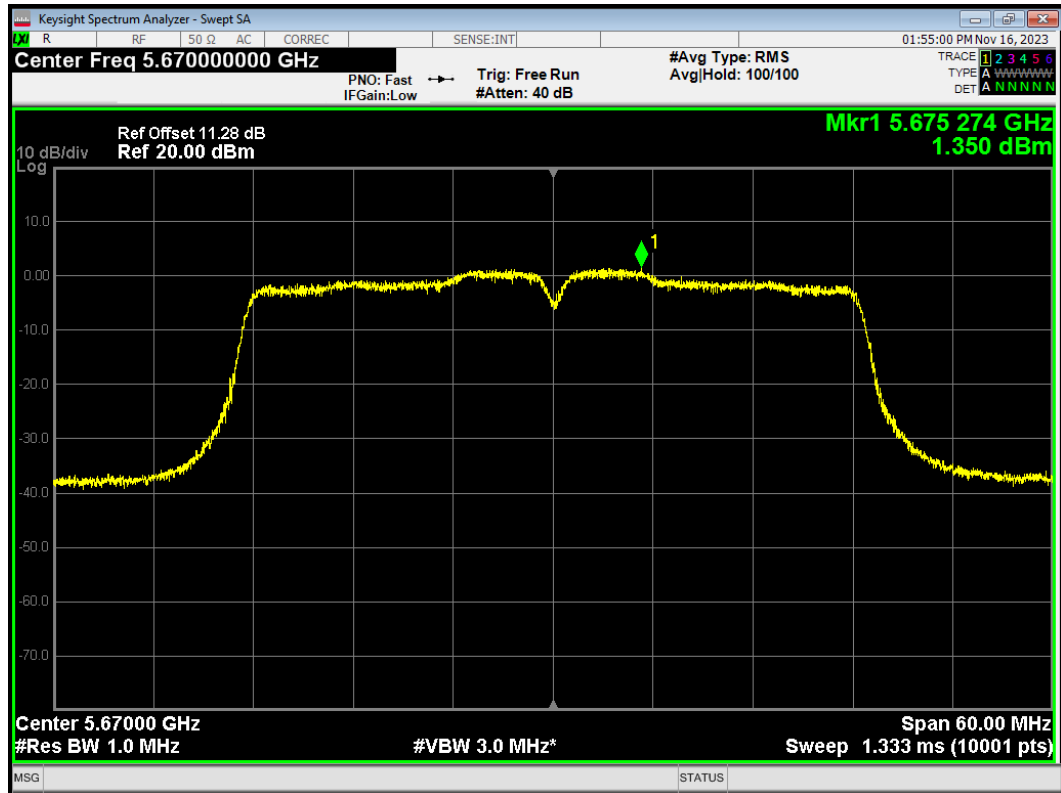


PSD 802.11ac(VHT40) 5710MHz

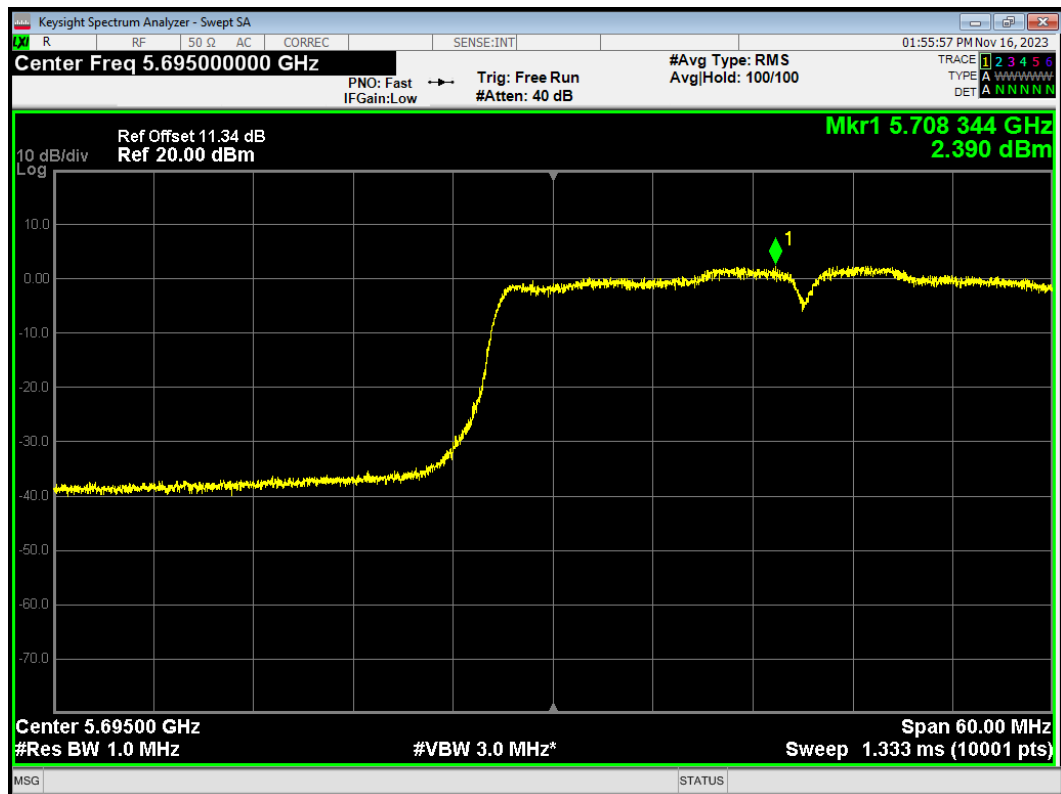


PSD 802.11ac(VHT80) 5530MHz

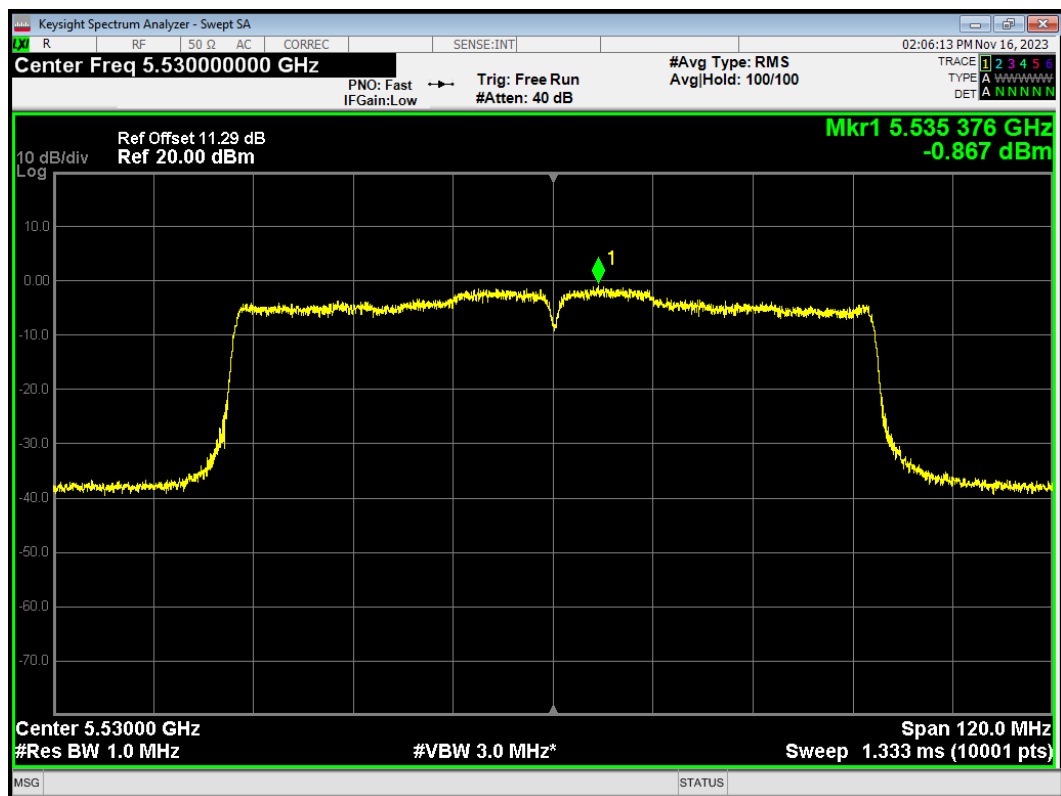


PSD 802.11ac(VHT80) 5690MHz

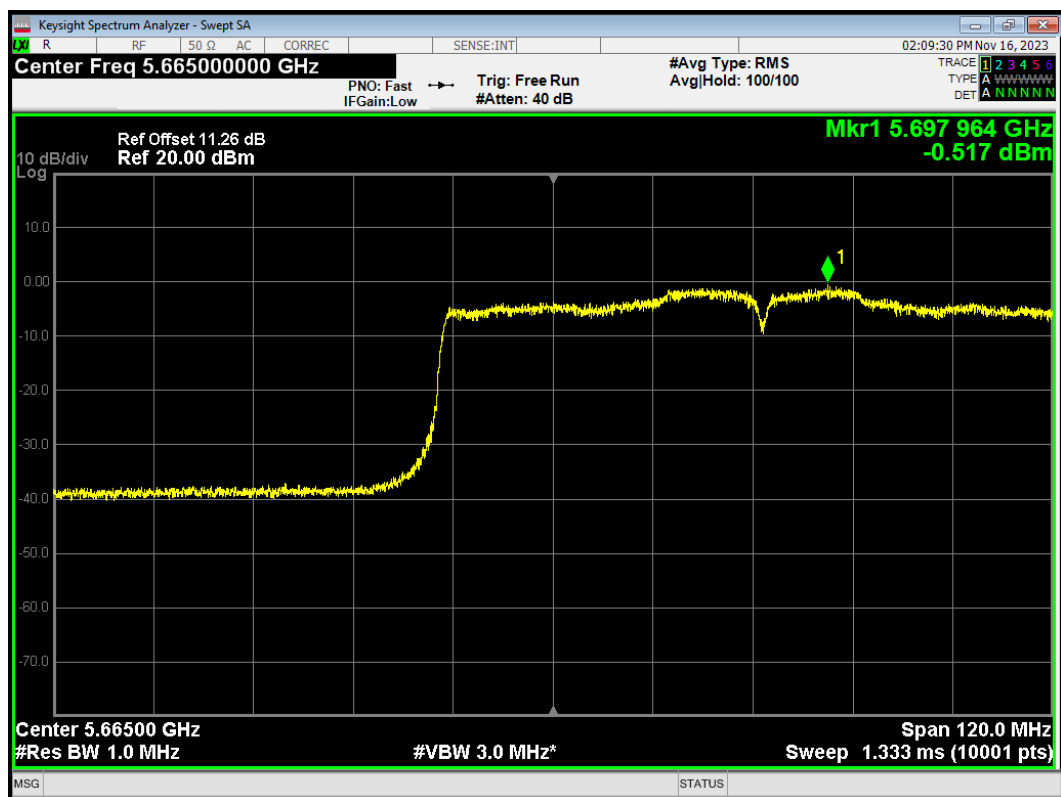


PSD 802.11ax(HE20) 5500MHz

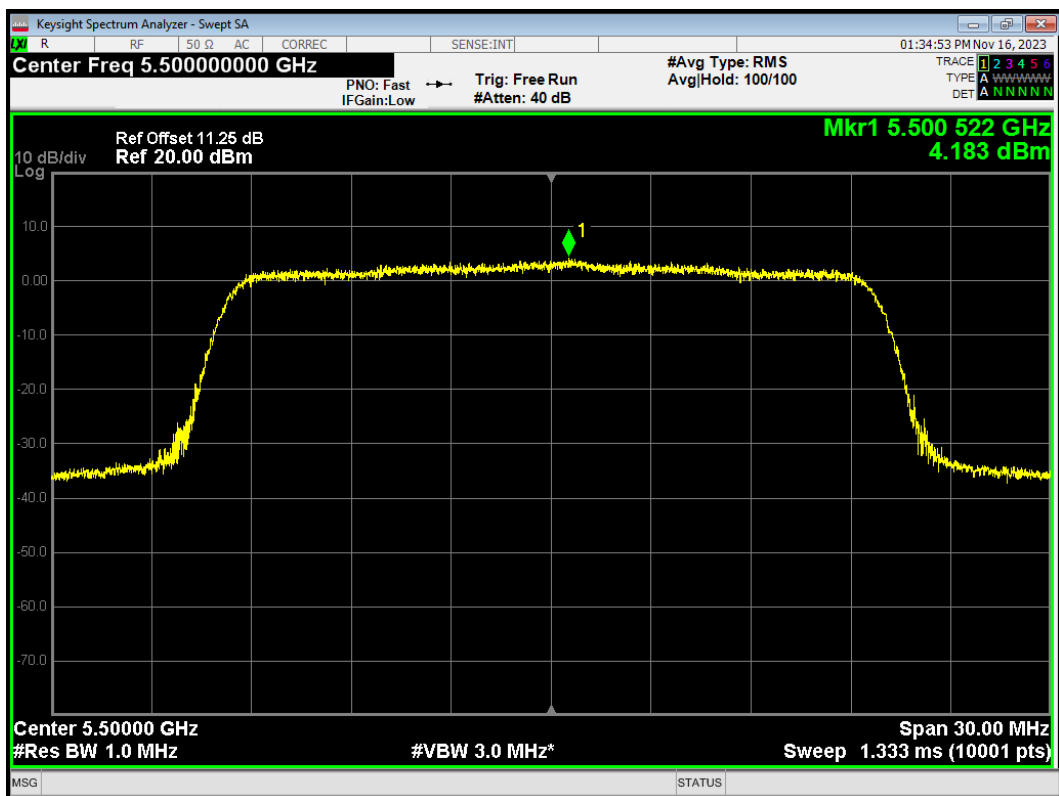


PSD 802.11ax(HE20) 5580MHz

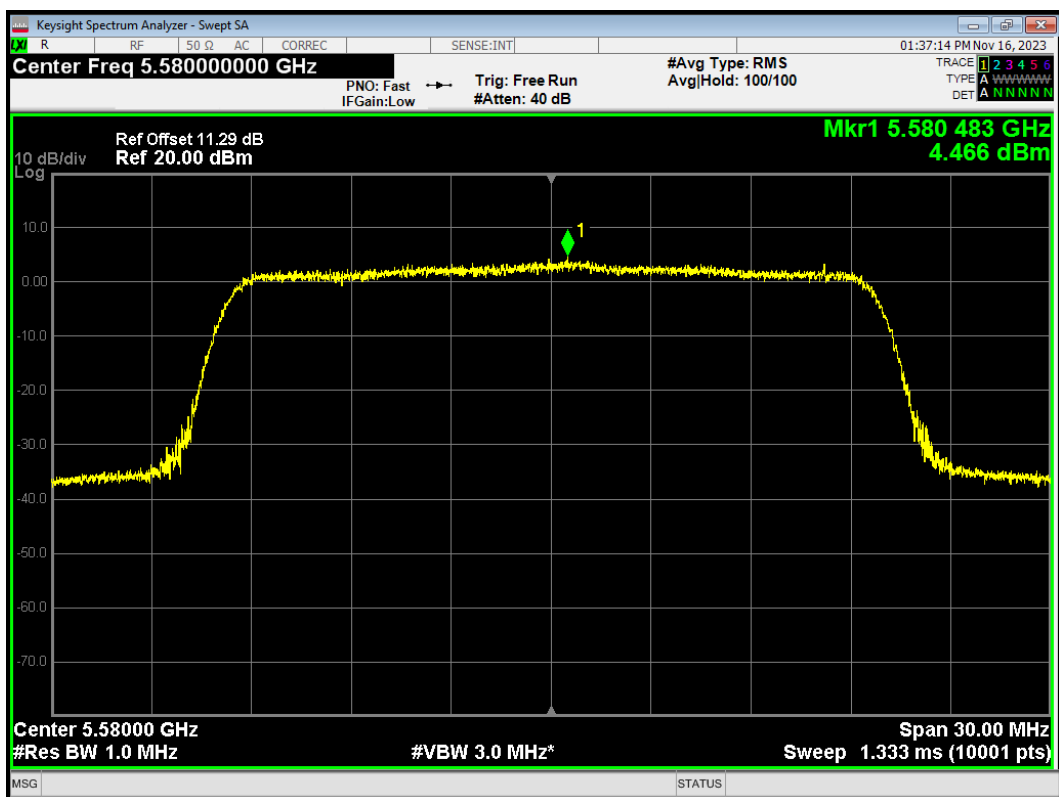


PSD 802.11ax(HE20) 5700MHz

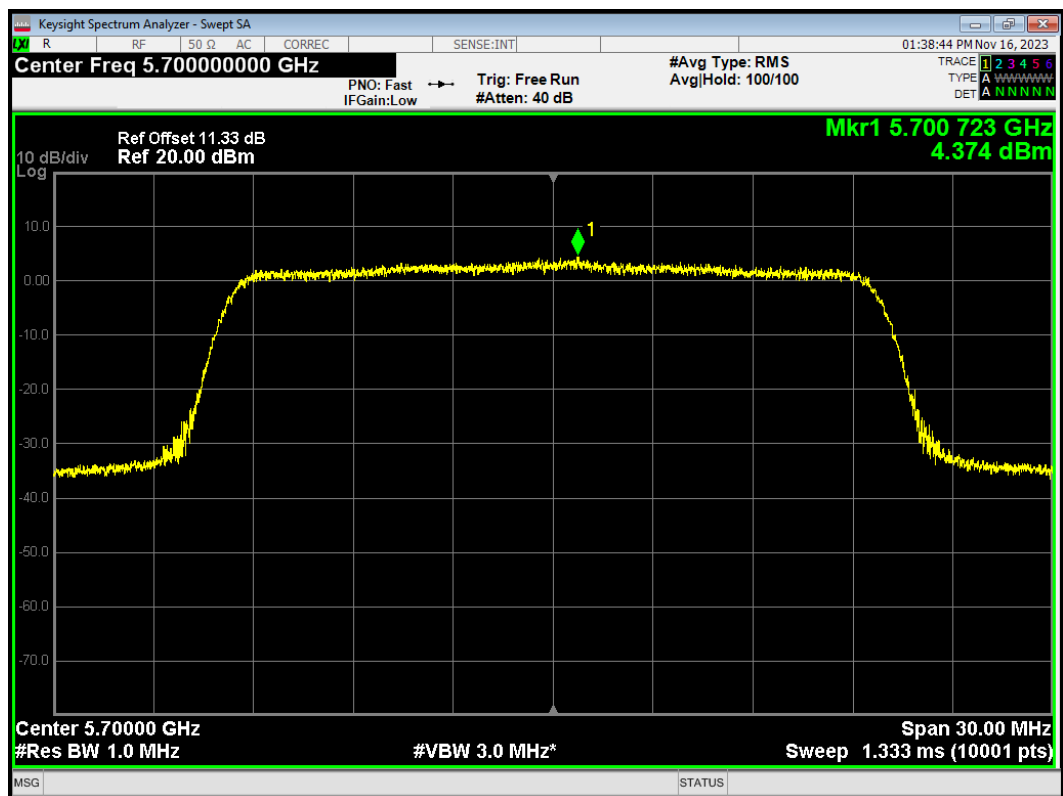


PSD 802.11ax(HE20) 5720MHz

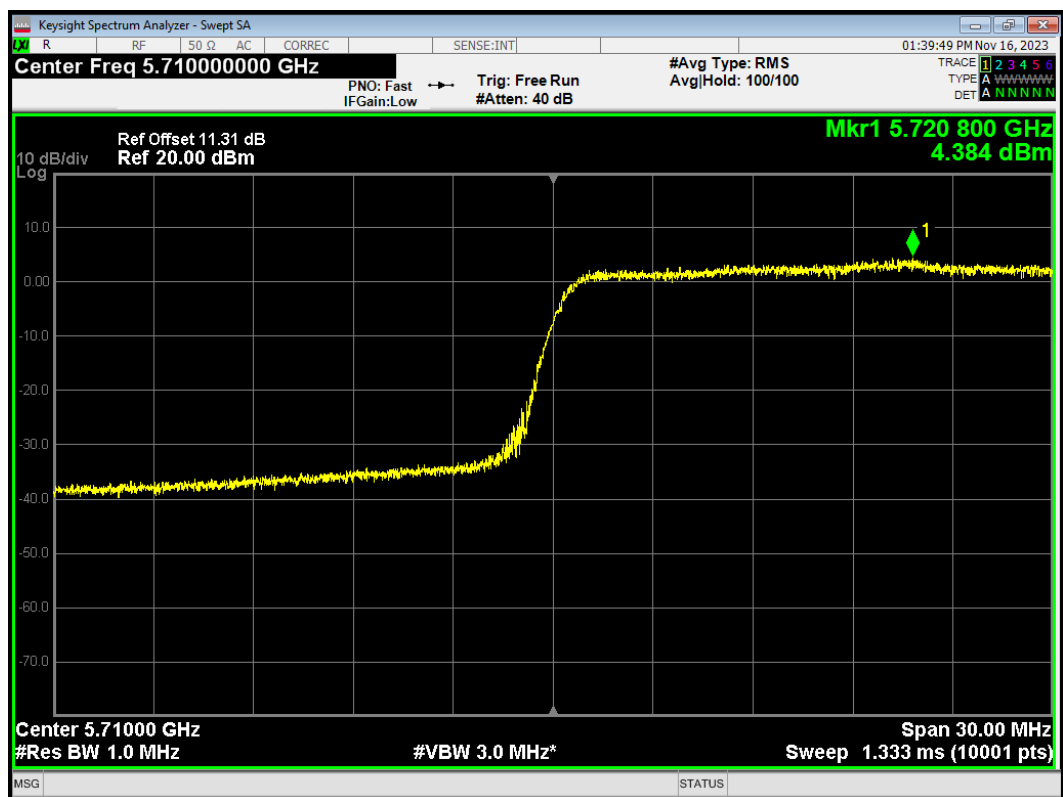


PSD 802.11ax(HE40) 5510MHz

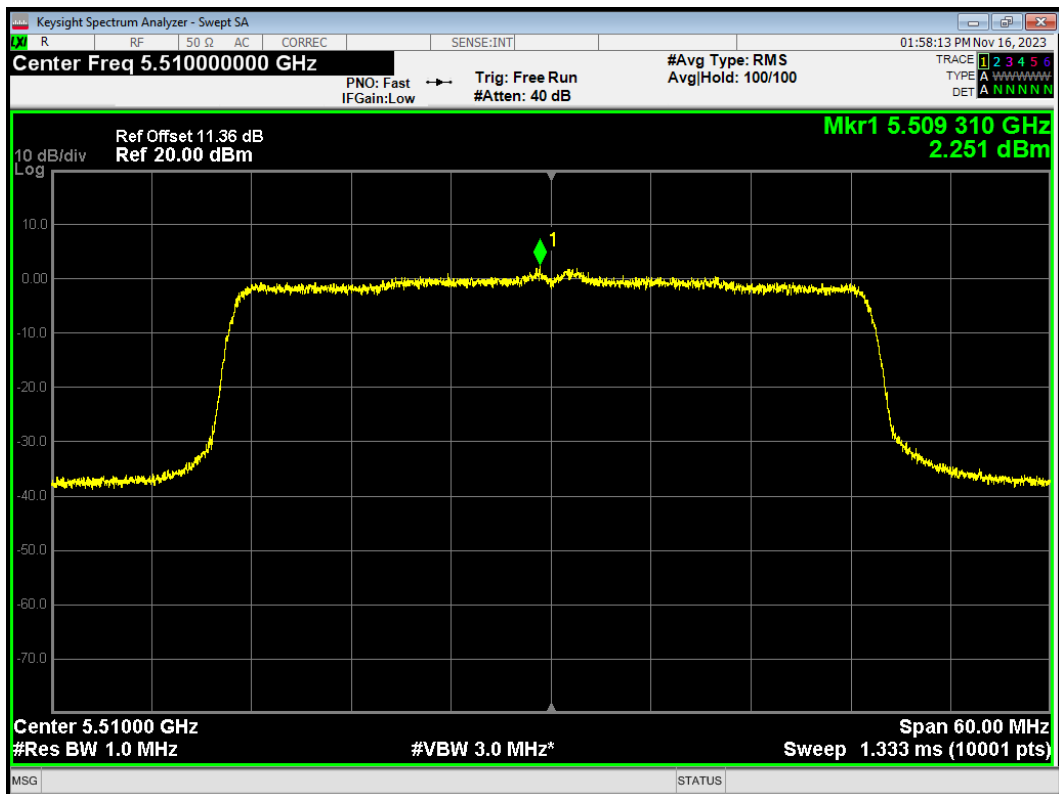


PSD 802.11ax(HE40) 5550MHz

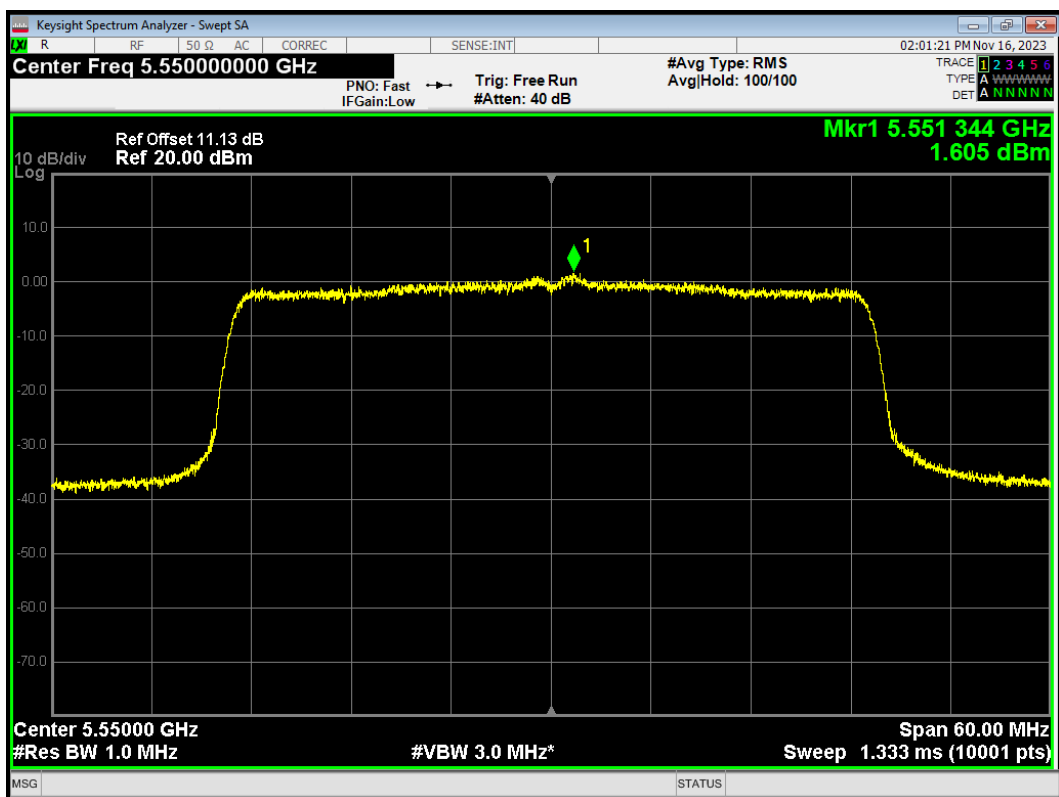


PSD 802.11ax(HE40) 5670MHz

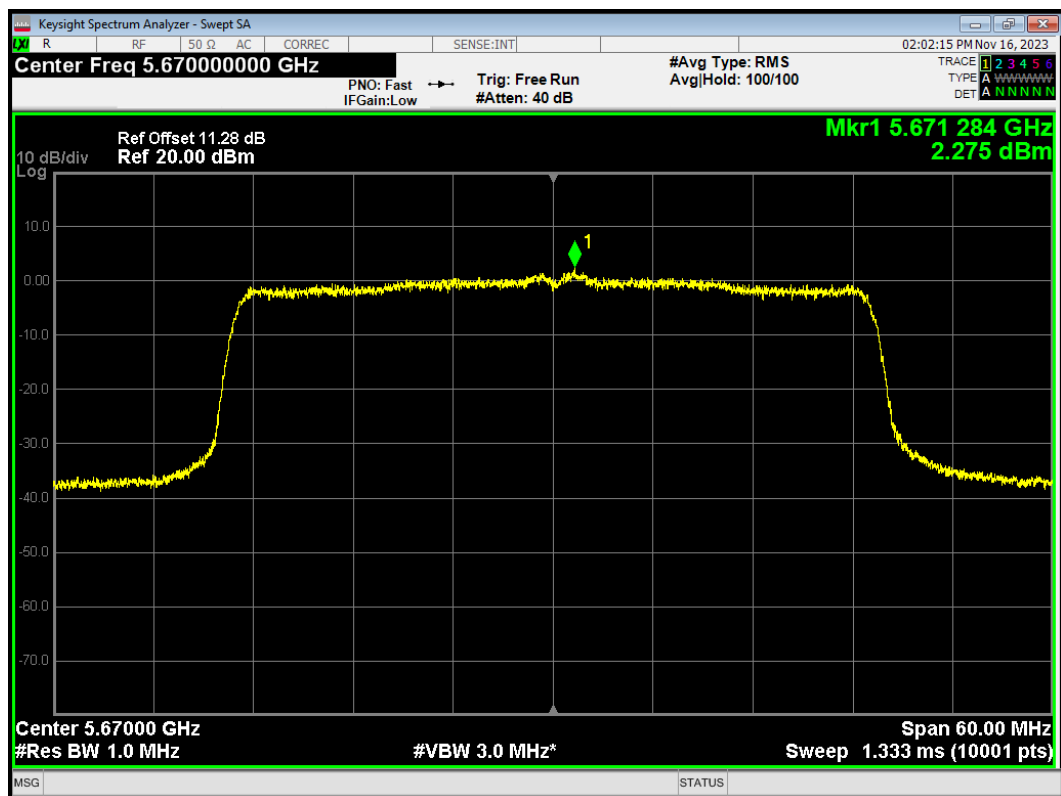


PSD 802.11ax(HE40) 5710MHz

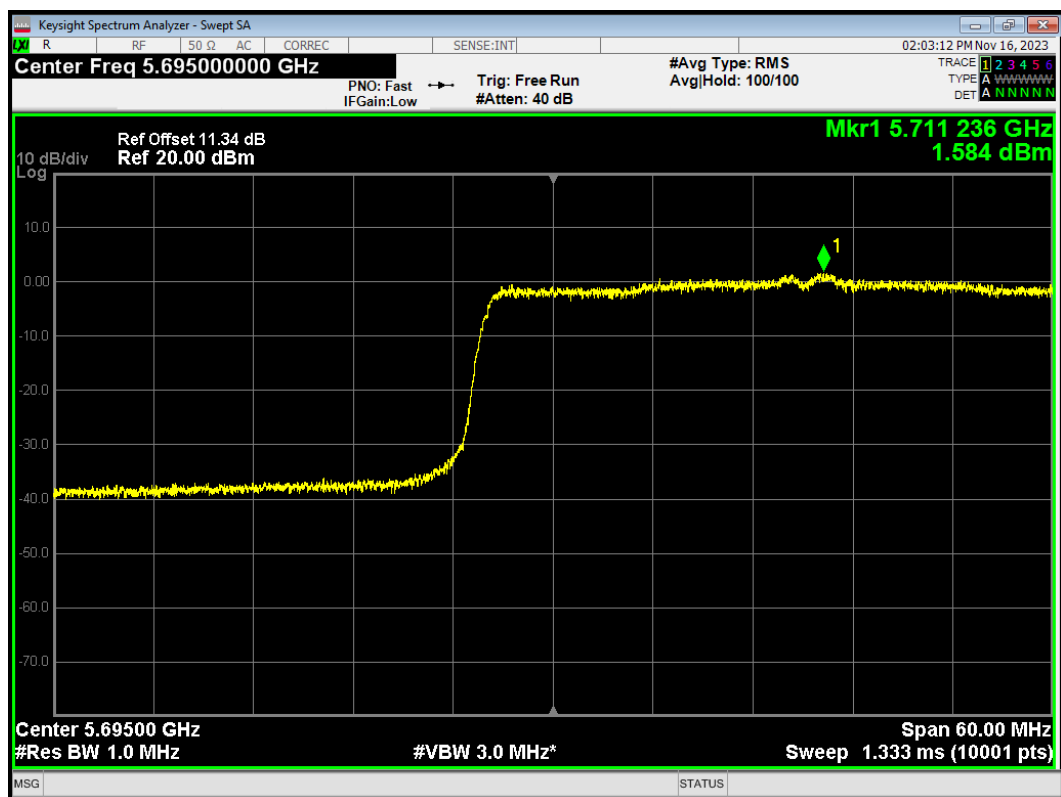


PSD 802.11ax(HE80) 5530MHz

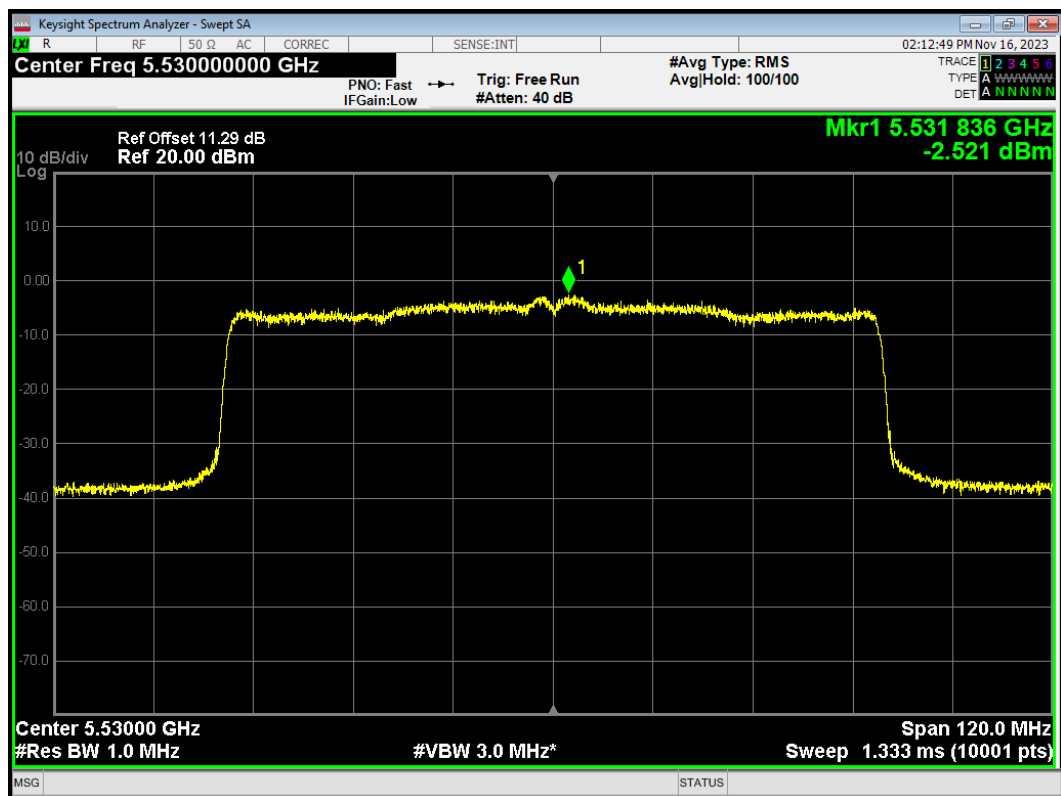


PSD 802.11ax(HE80) 5690MHz

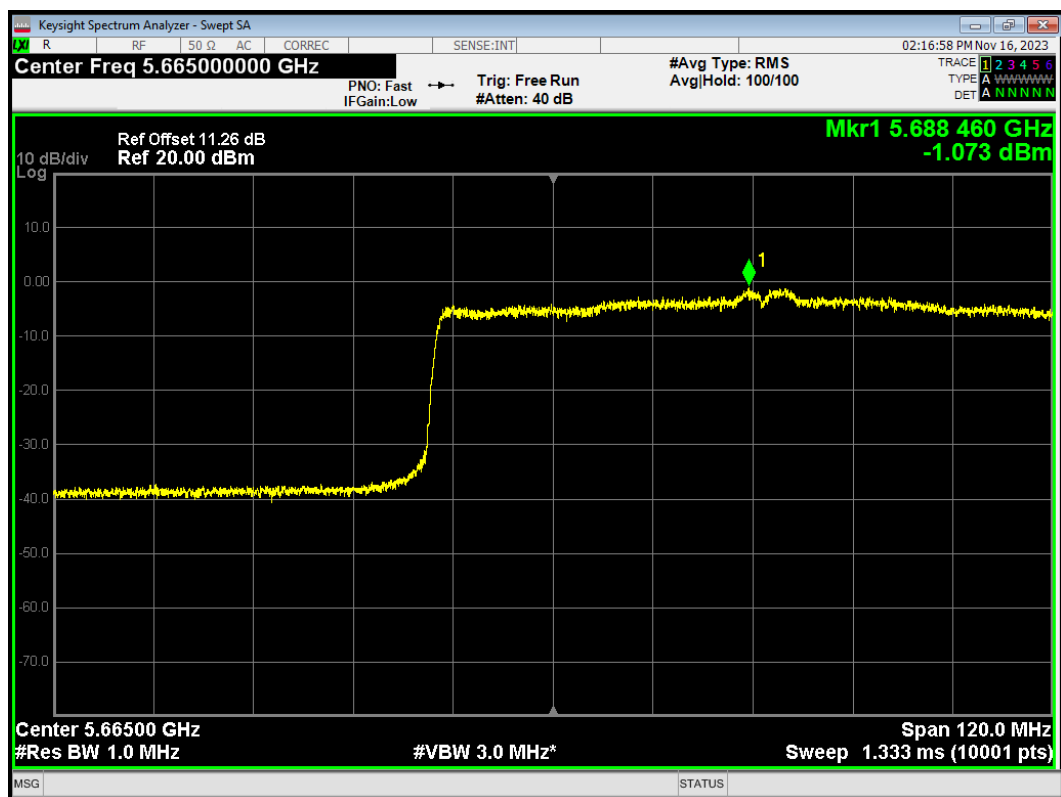


PSD 802.11n(HT20) 5500MHz

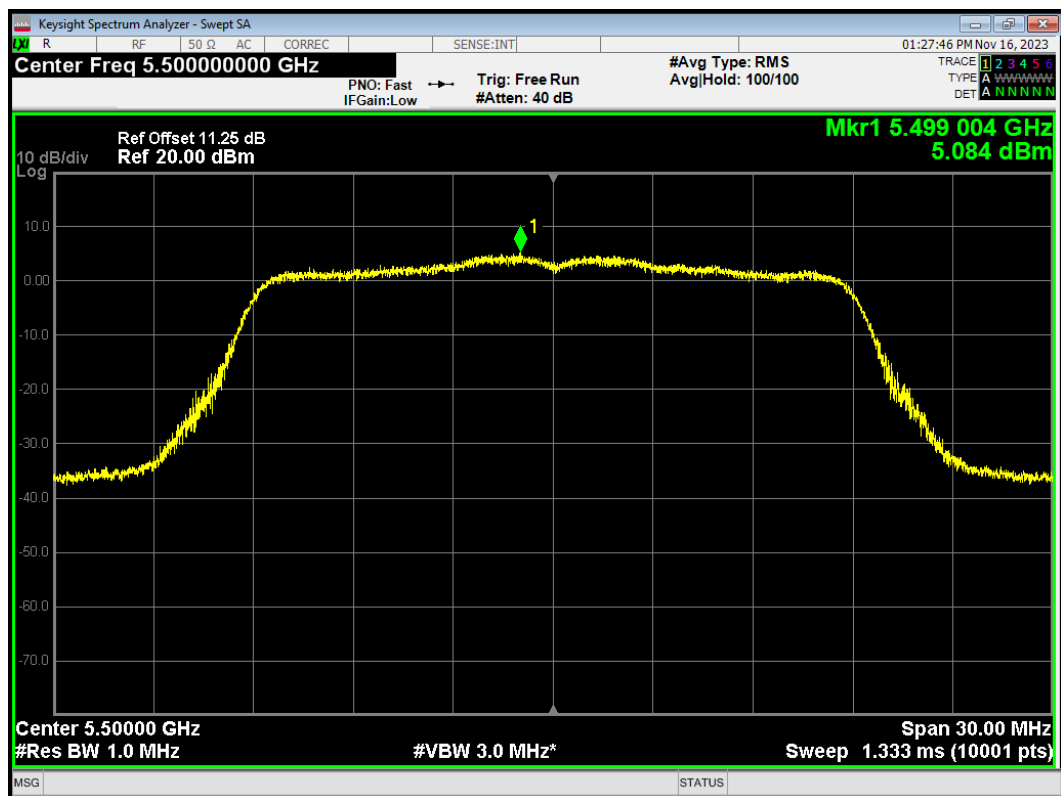


PSD 802.11n(HT20) 5580MHz

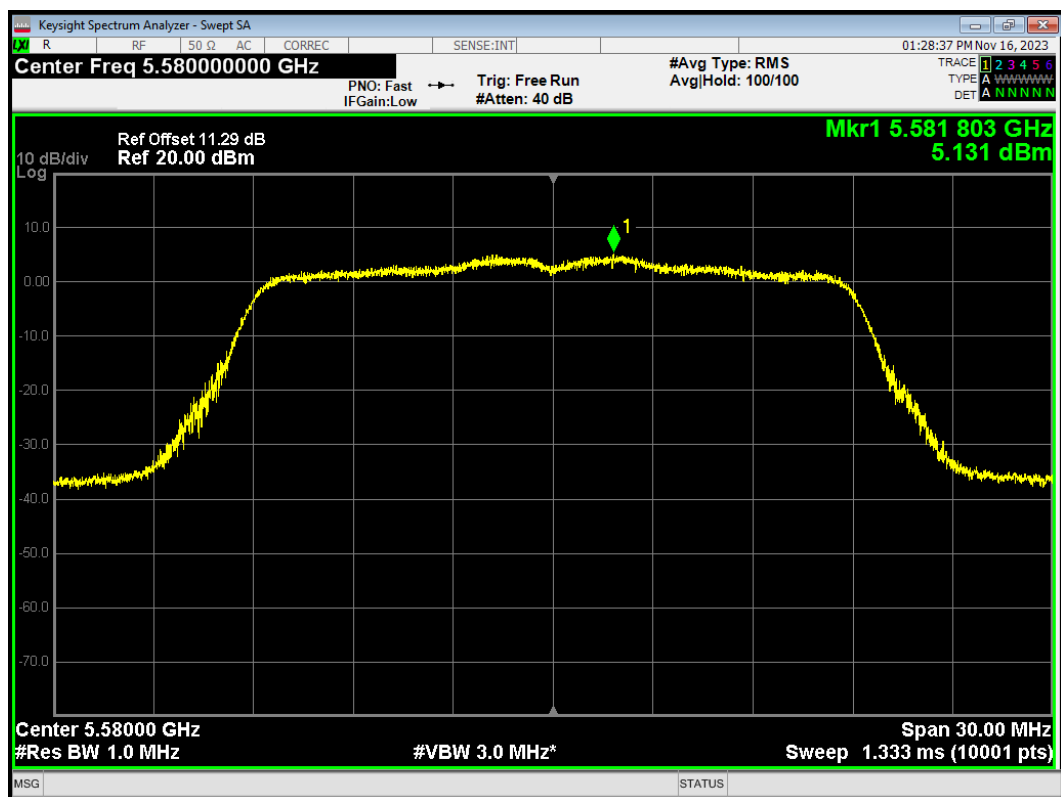


PSD 802.11n(HT20) 5700MHz

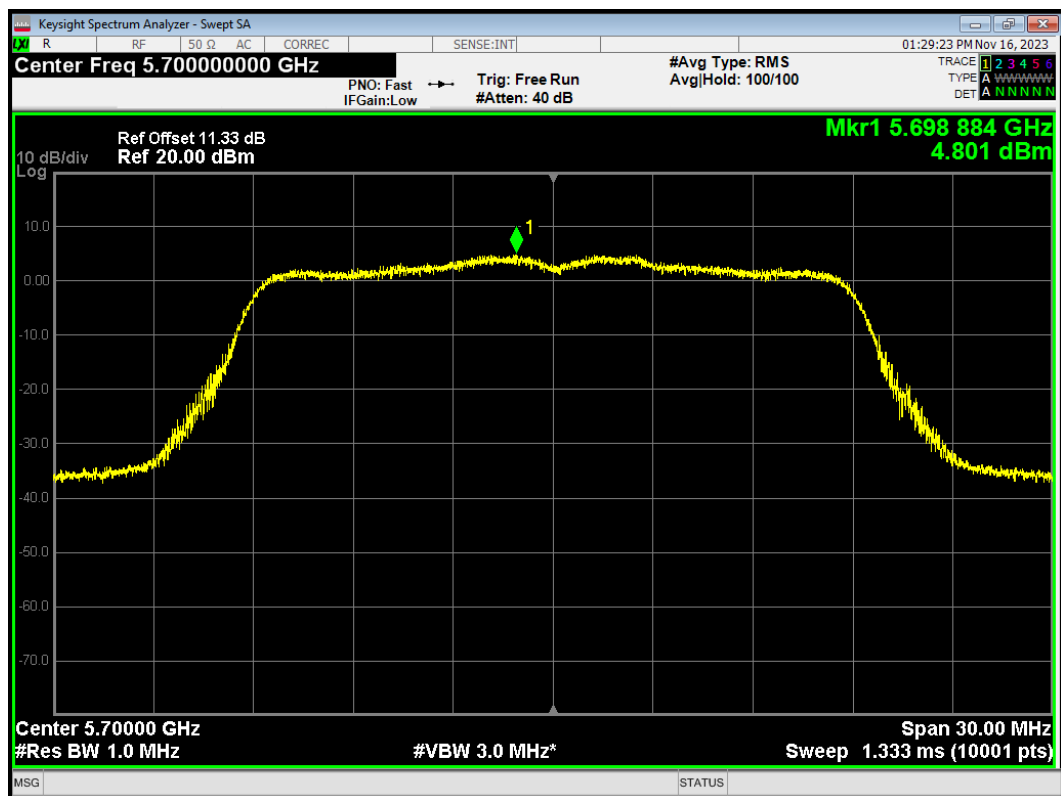


PSD 802.11n(HT20) 5720MHz

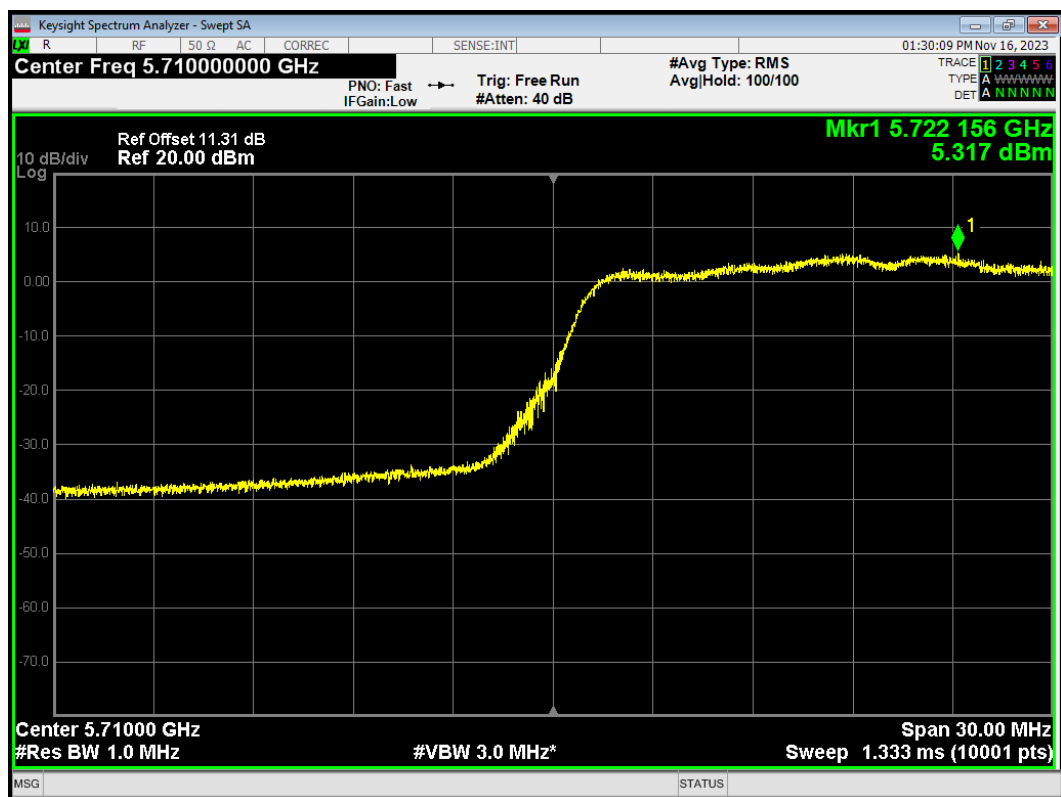


PSD 802.11n(HT40) 5510MHz

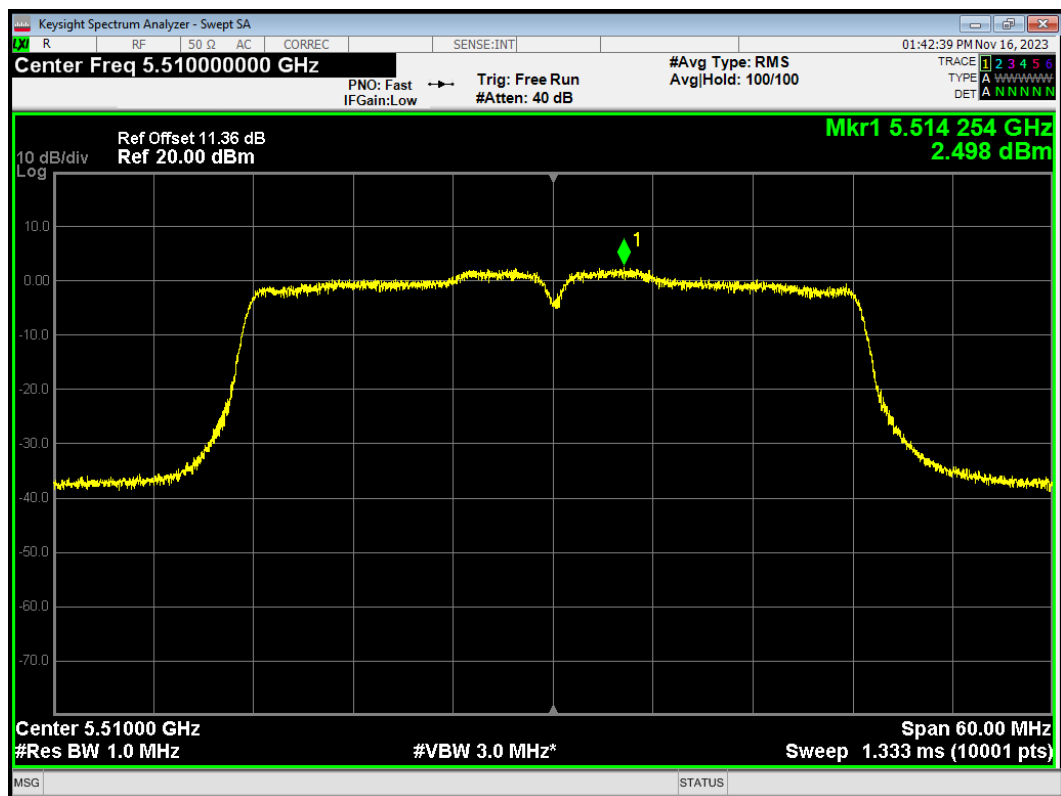


PSD 802.11n(HT40) 5550MHz

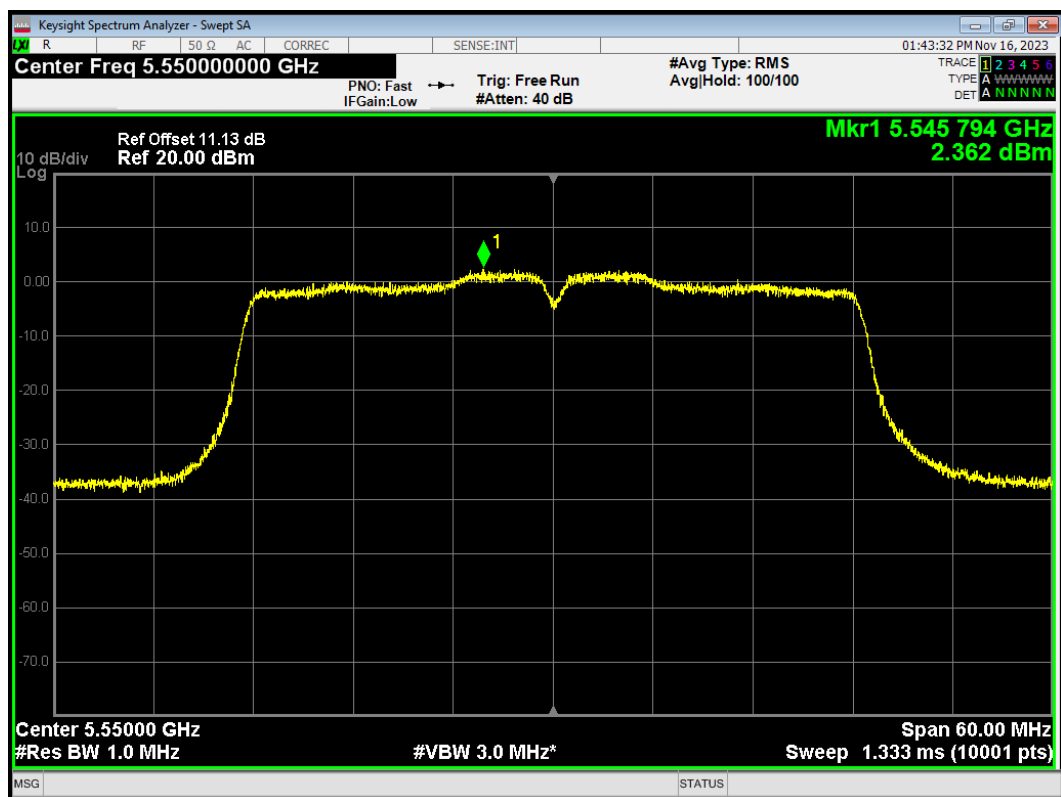

PSD 802.11n(HT40) 5670MHz

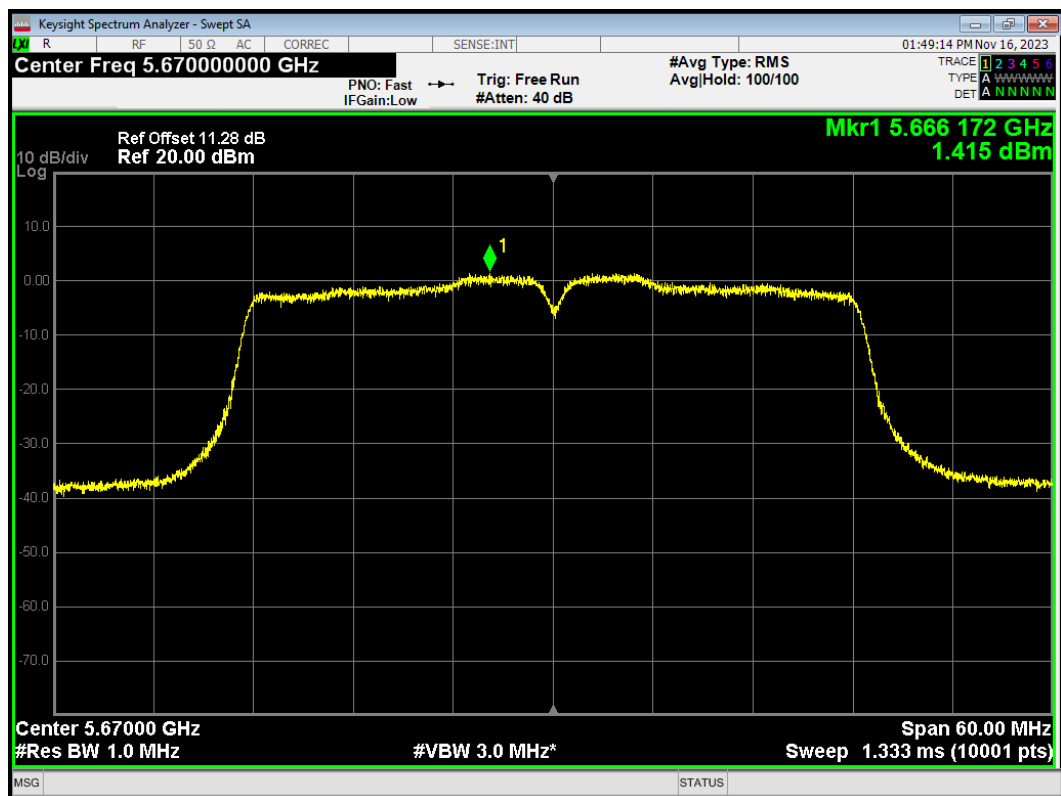


PSD 802.11n(HT40) 5710MHz

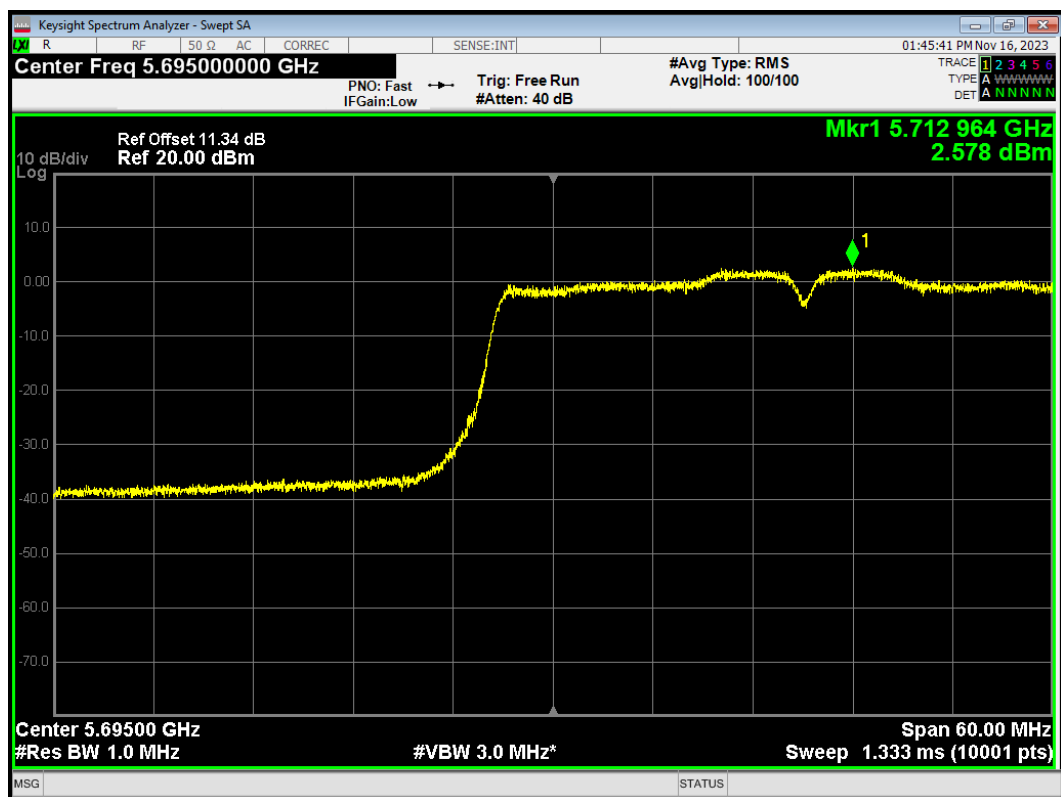


U-NII-3


PSD 802.11a 5720MHz

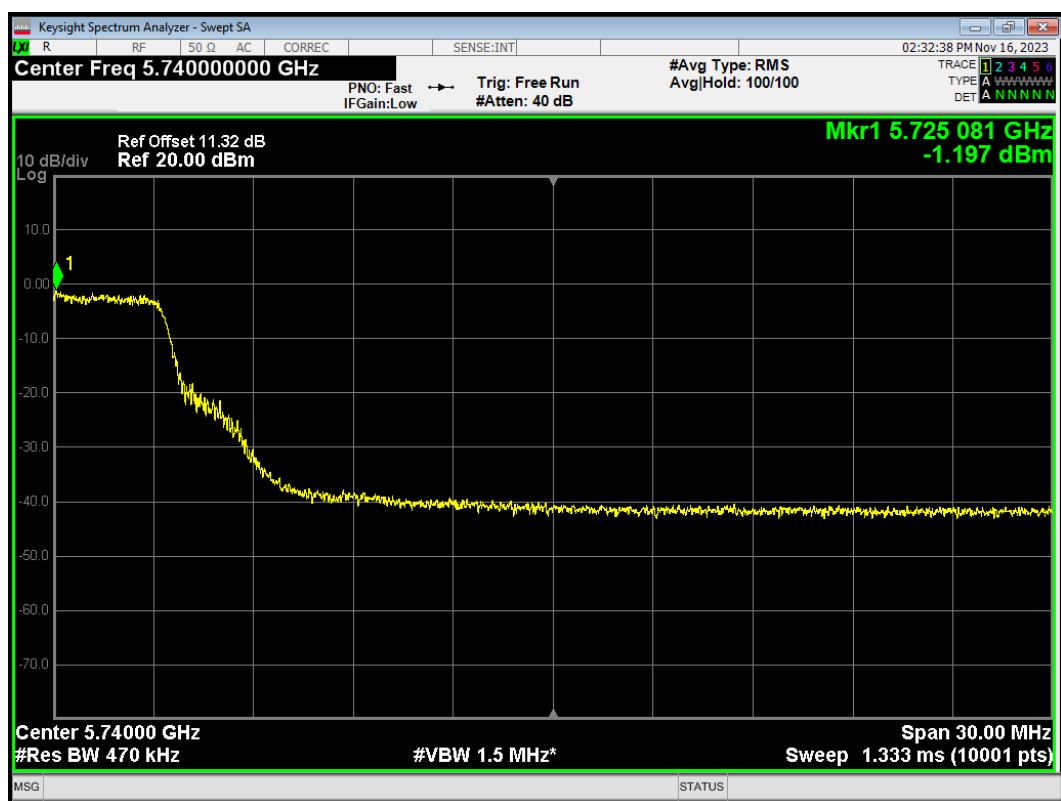


PSD 802.11a 5745MHz

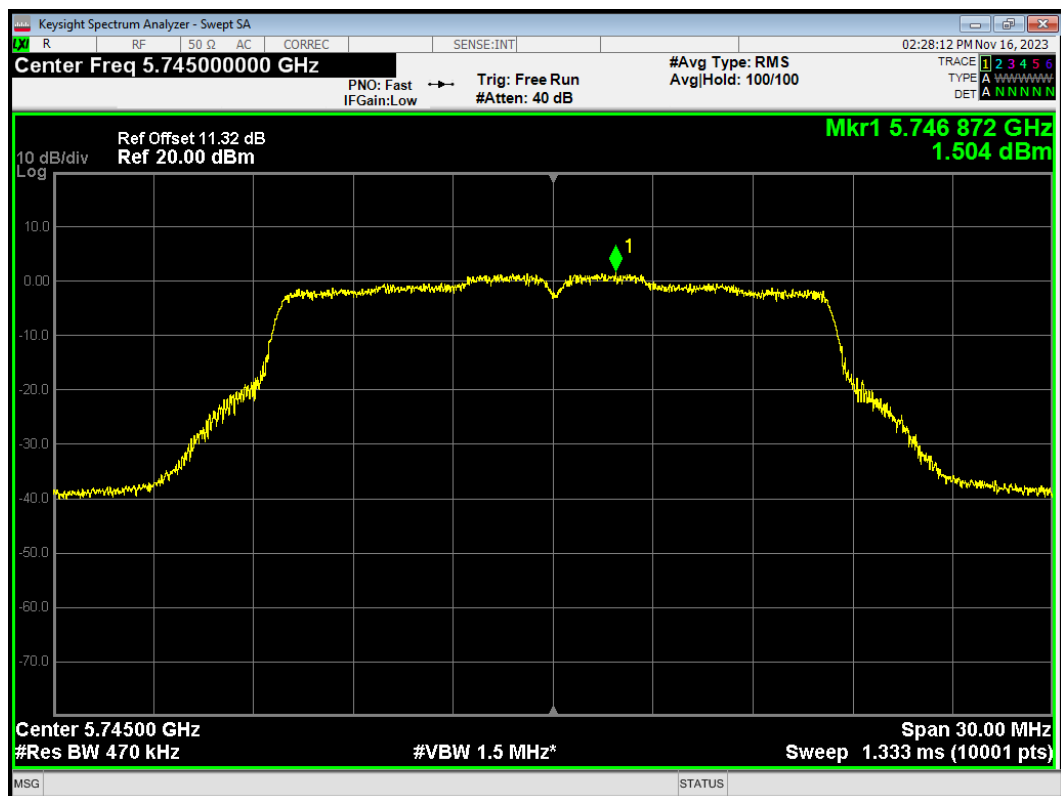


PSD 802.11a 5785MHz

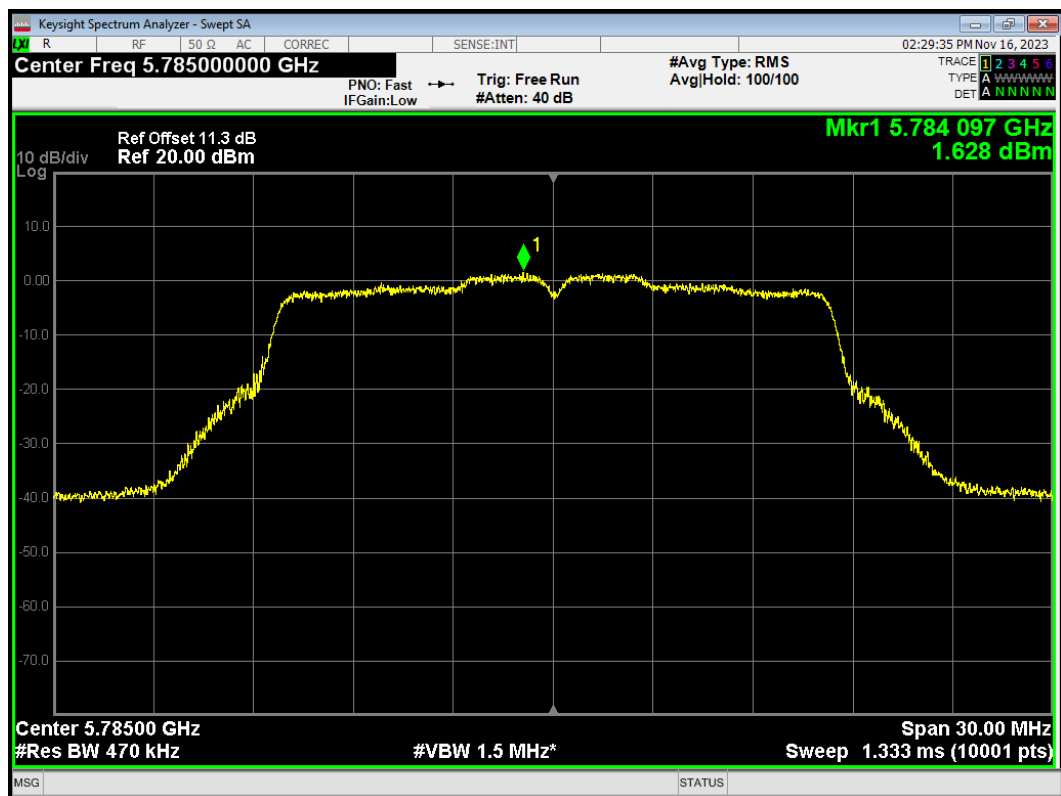


PSD 802.11a 5825MHz

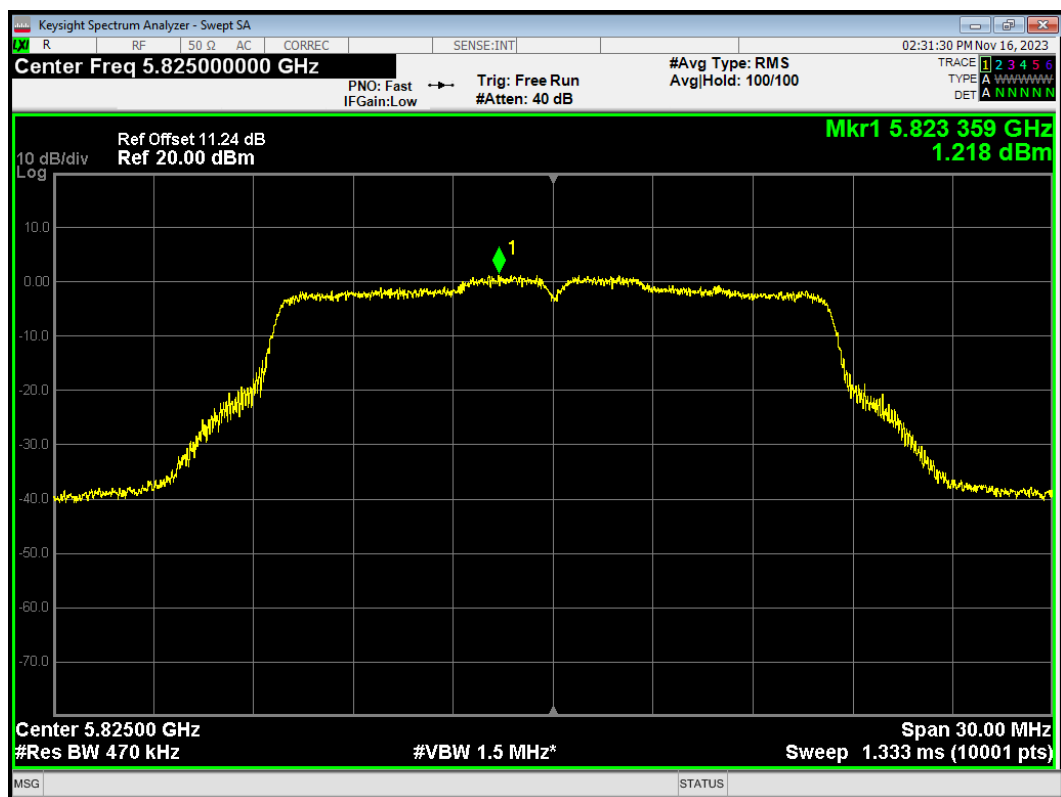


PSD 802.11ac(VHT20) 5720MHz

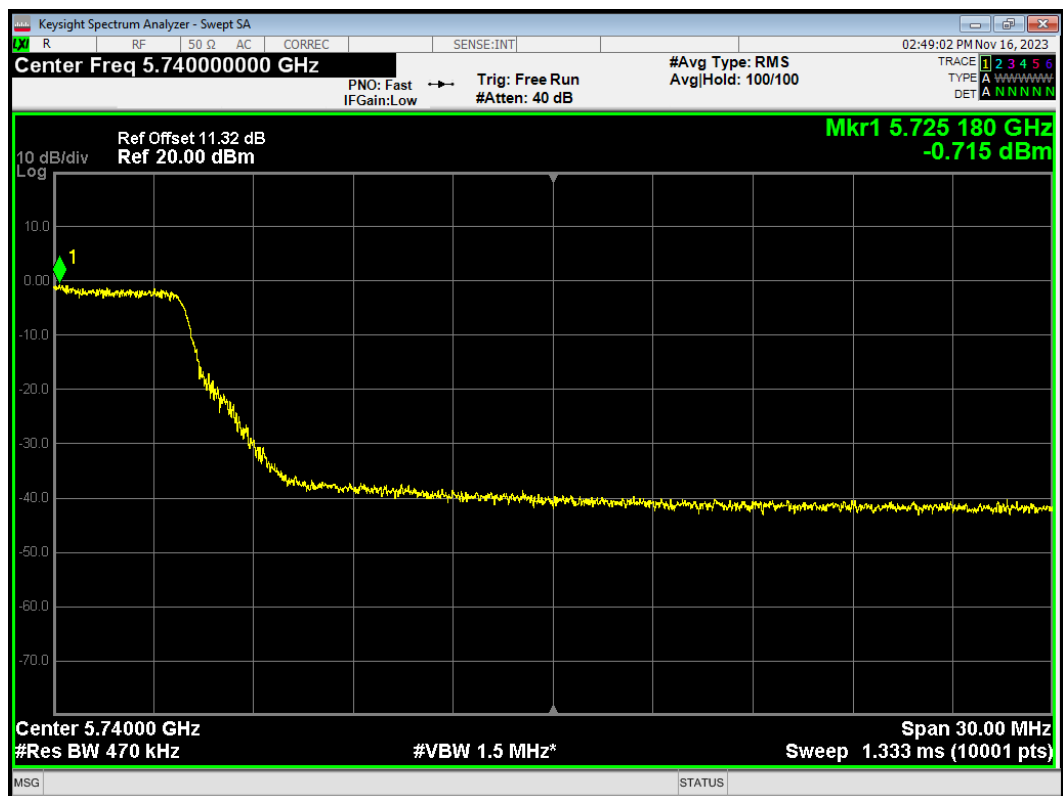


PSD 802.11ac(VHT20) 5745MHz

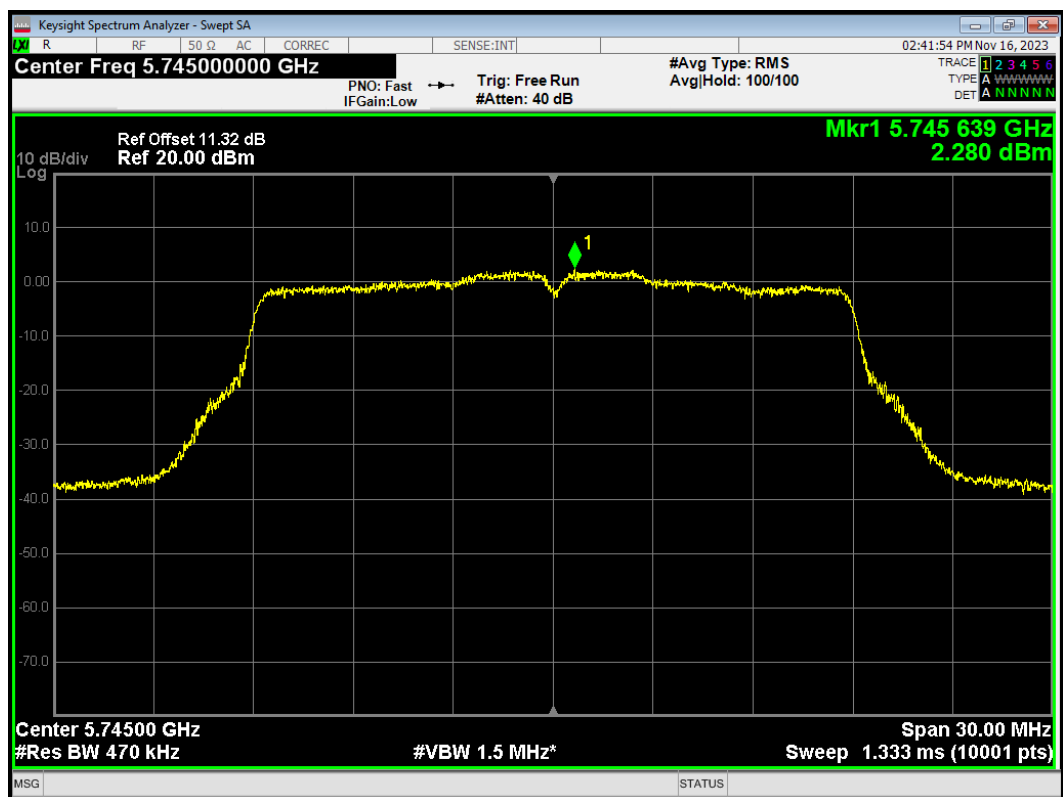


PSD 802.11ac(VHT20) 5785MHz

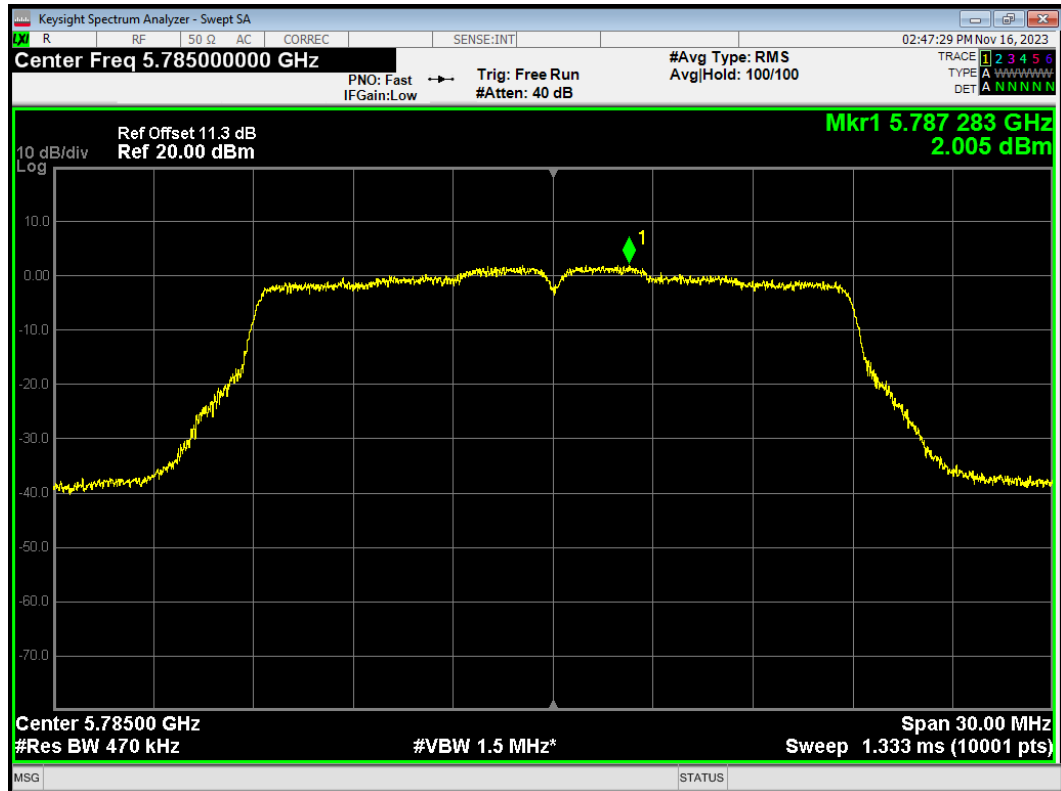


PSD 802.11ac(VHT20) 5825MHz

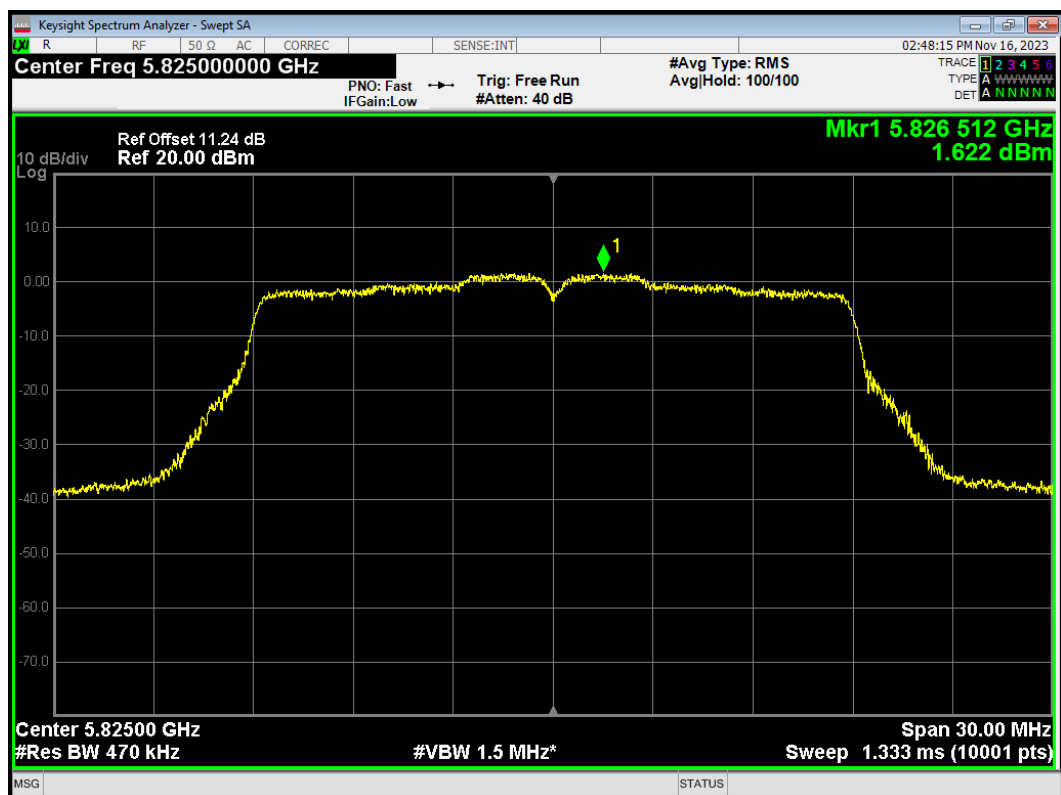


PSD 802.11ac(VHT40) 5710MHz

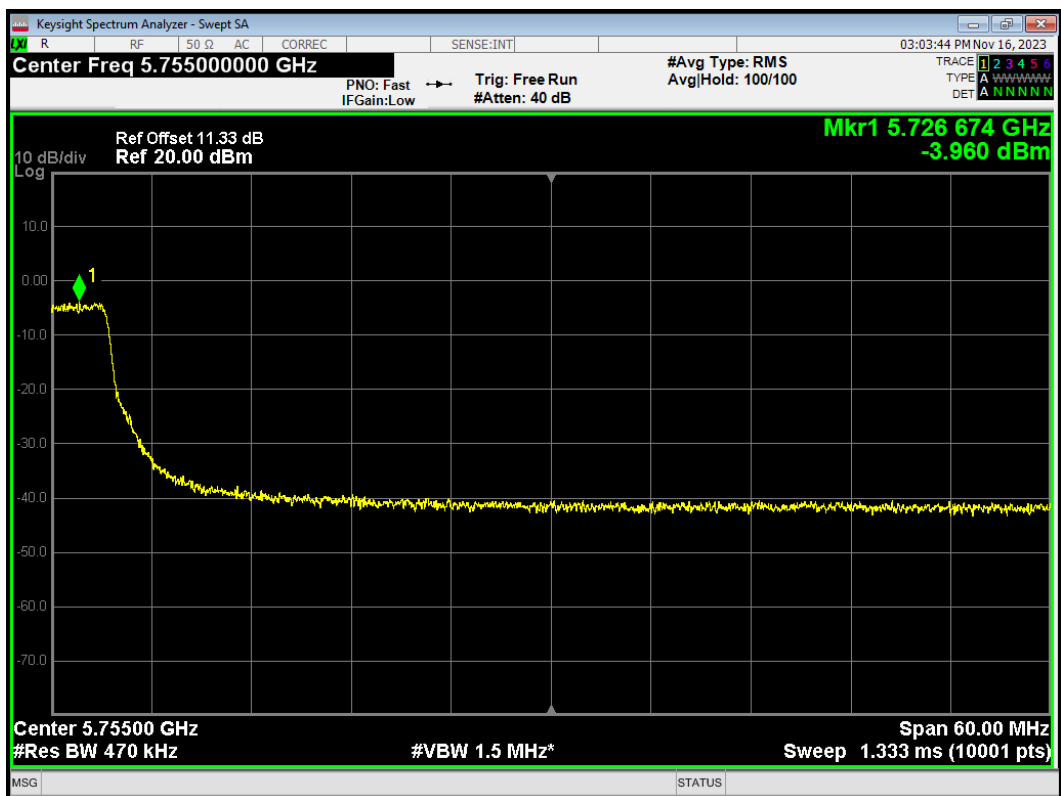


PSD 802.11ac(VHT40) 5710MHz

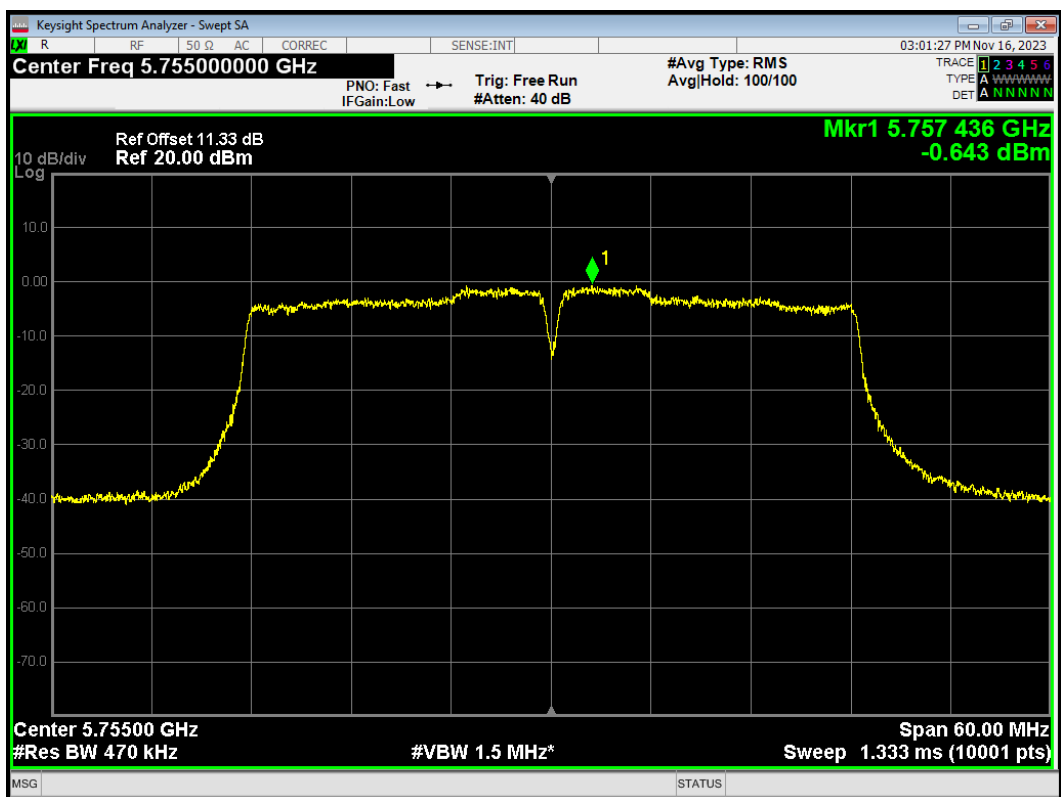


PSD 802.11ac(VHT40) 5795MHz

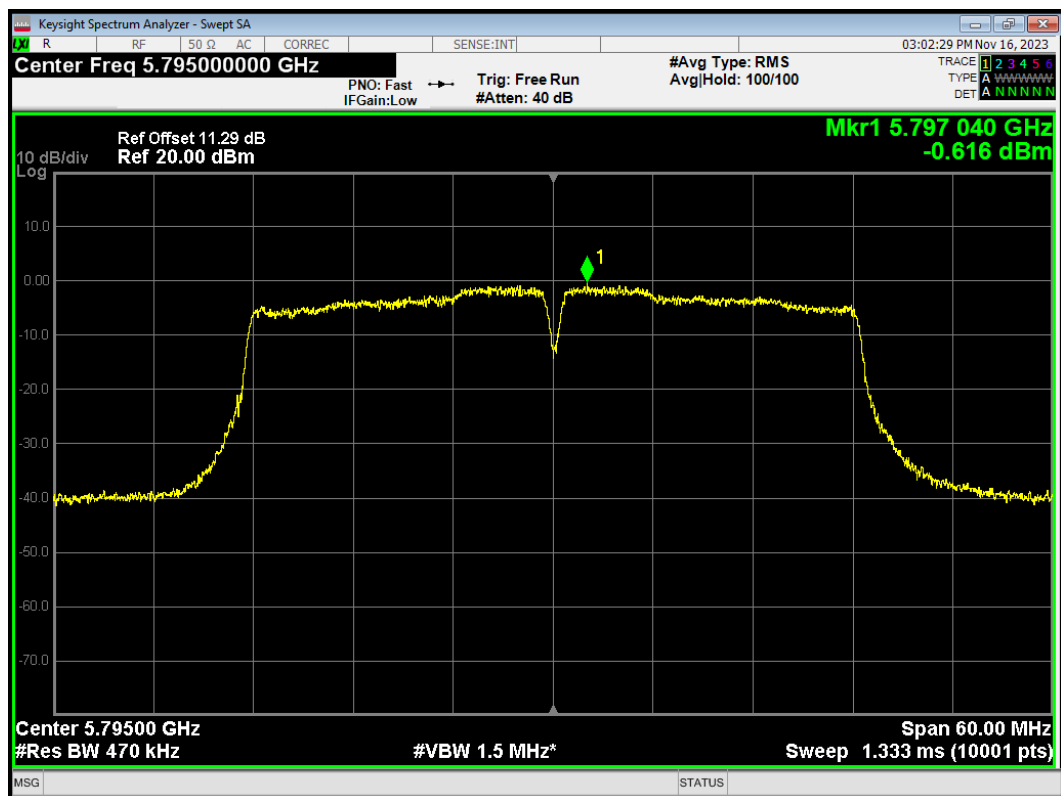


PSD 802.11ac(VHT80) 5690MHz

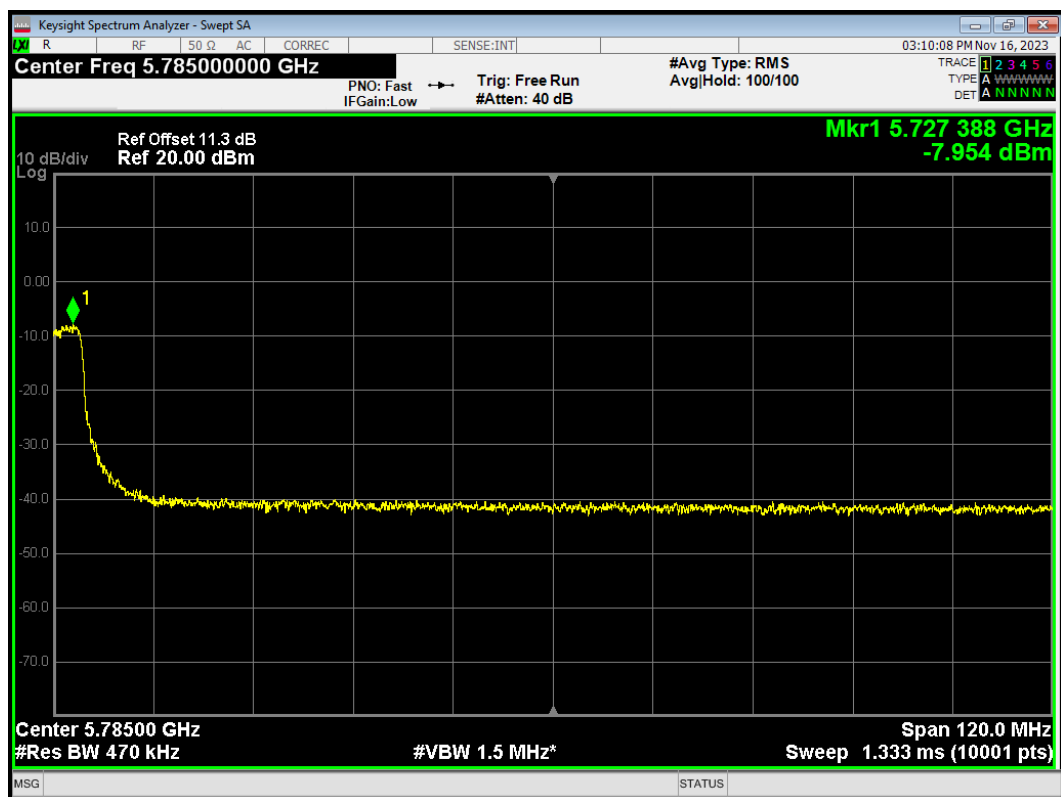


PSD 802.11ac(VHT80) 5775MHz

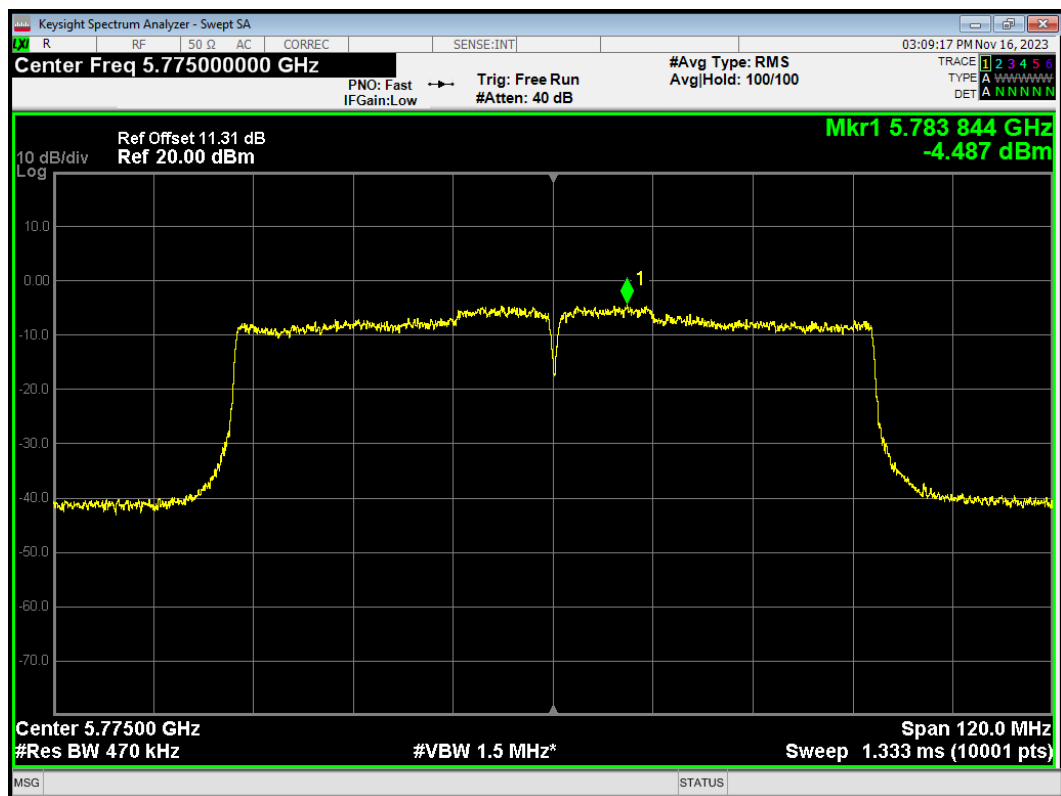


PSD 802.11ax(HE20) 5720MHz

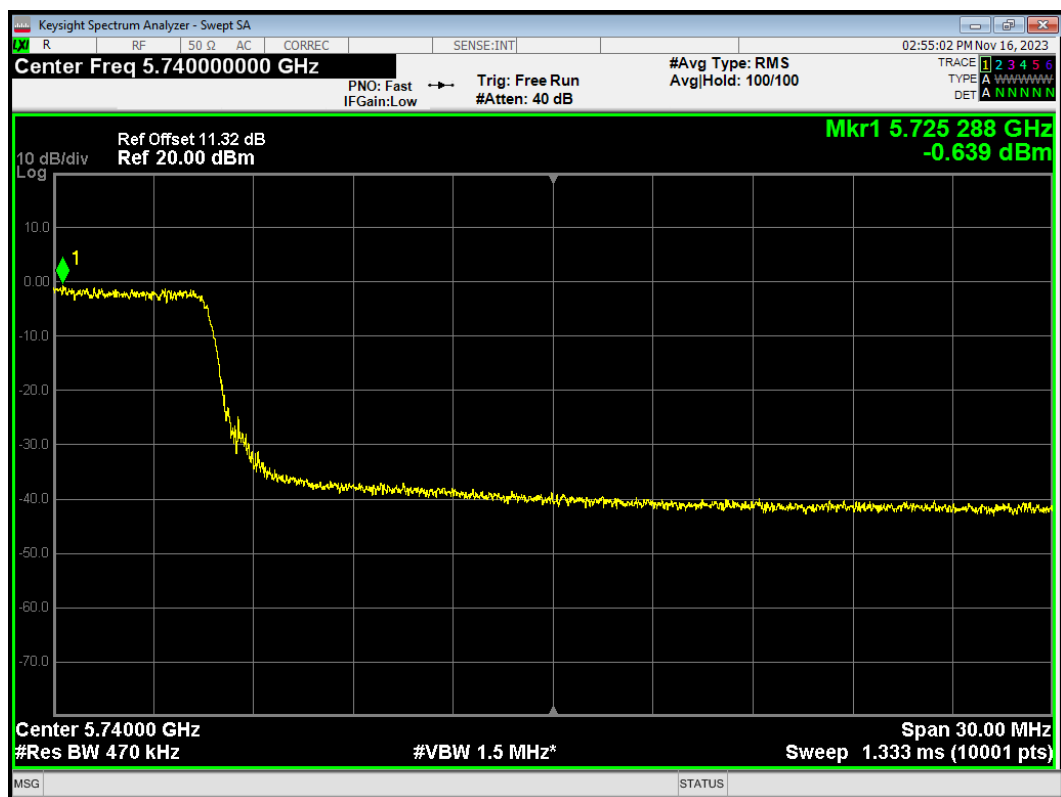


PSD 802.11ax(HE20) 5745MHz

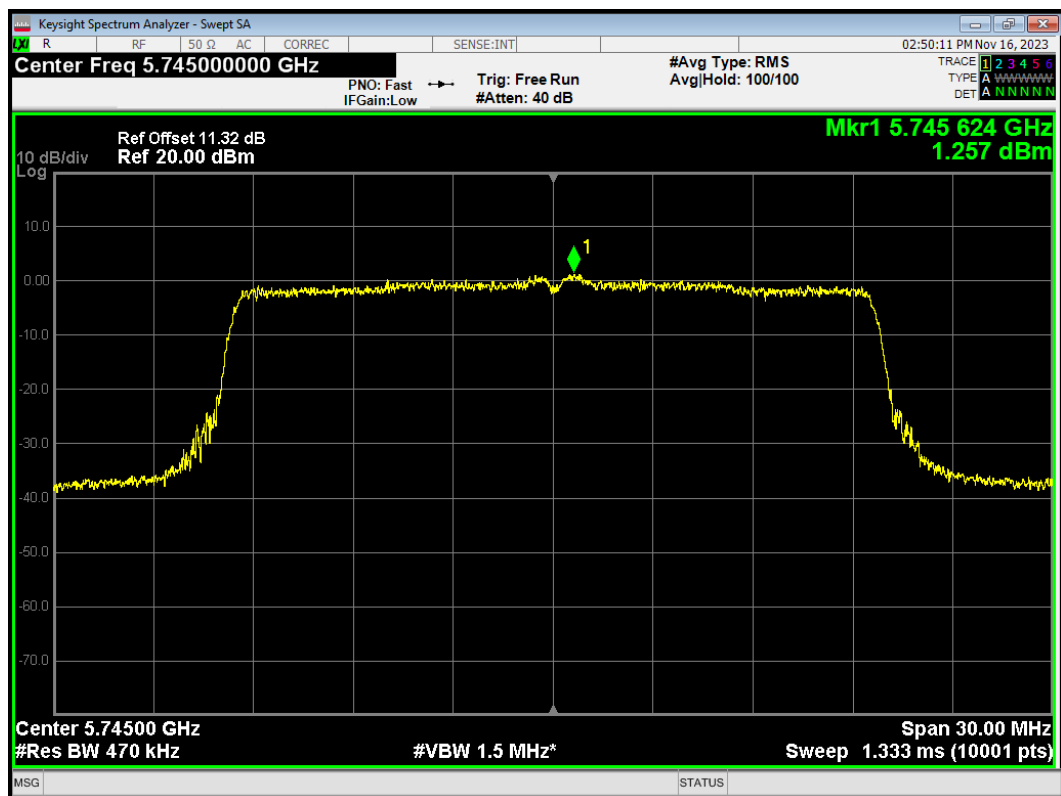


PSD 802.11ax(HE20) 5785MHz

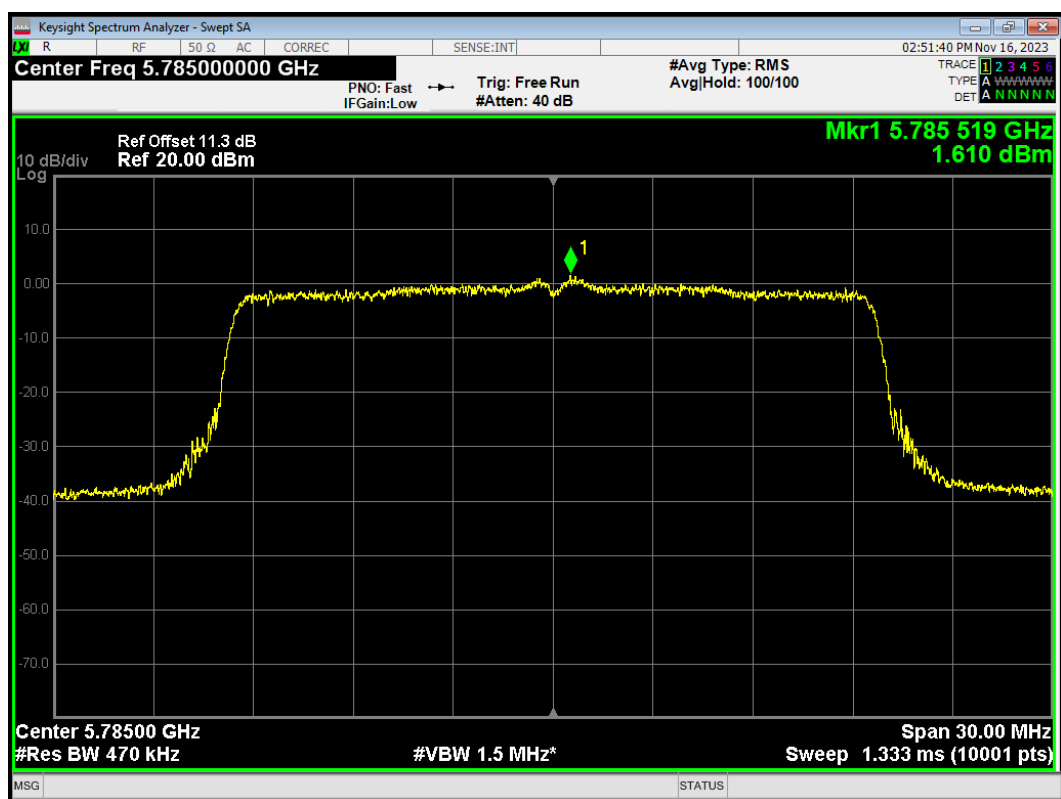


PSD 802.11ax(HE20) 5825MHz

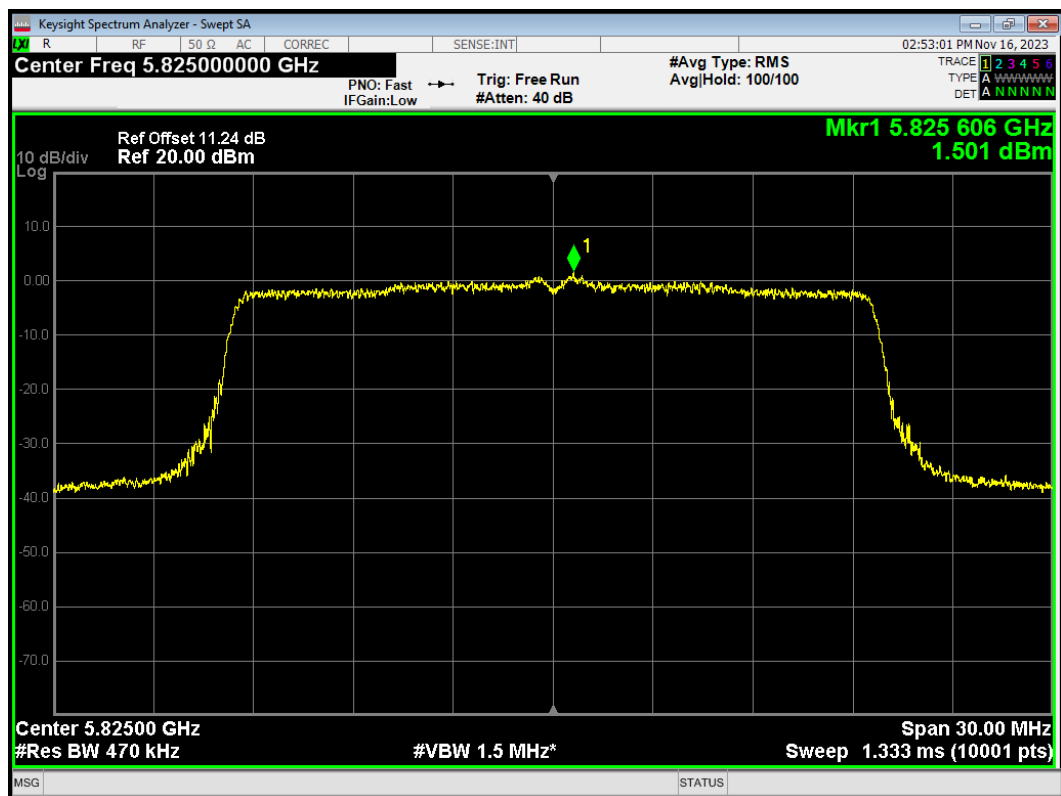


PSD 802.11ax(HE40) 5710MHz

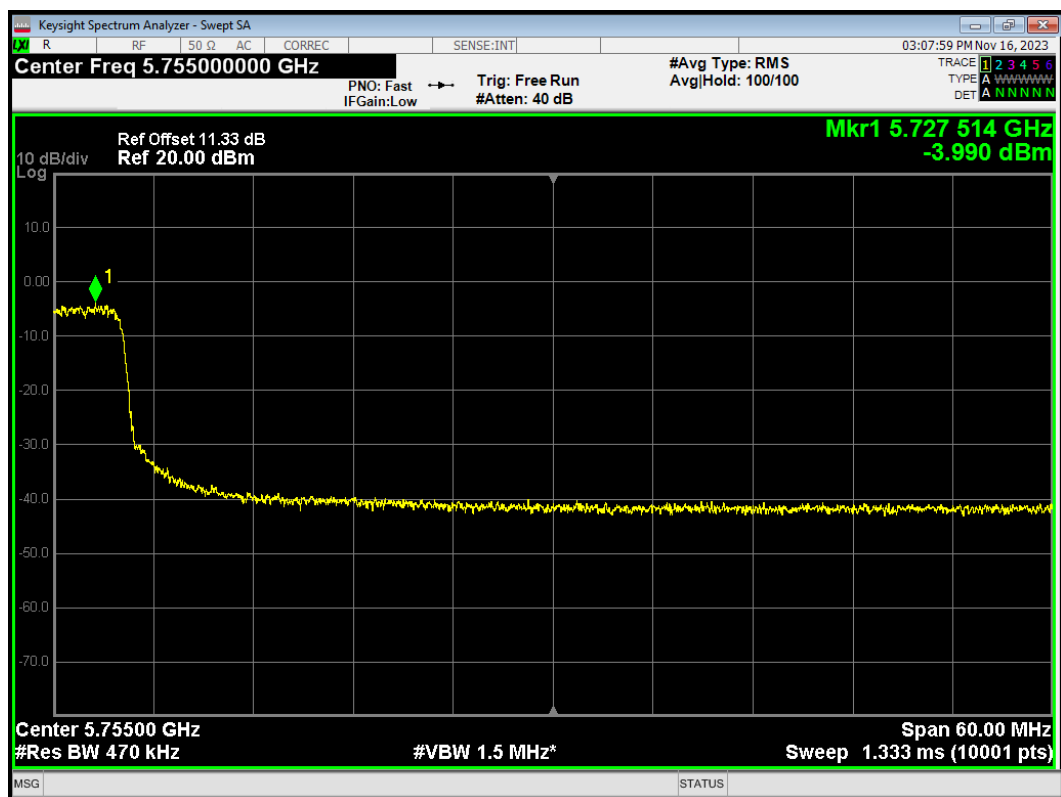


PSD 802.11ax(HE40) 5755MHz

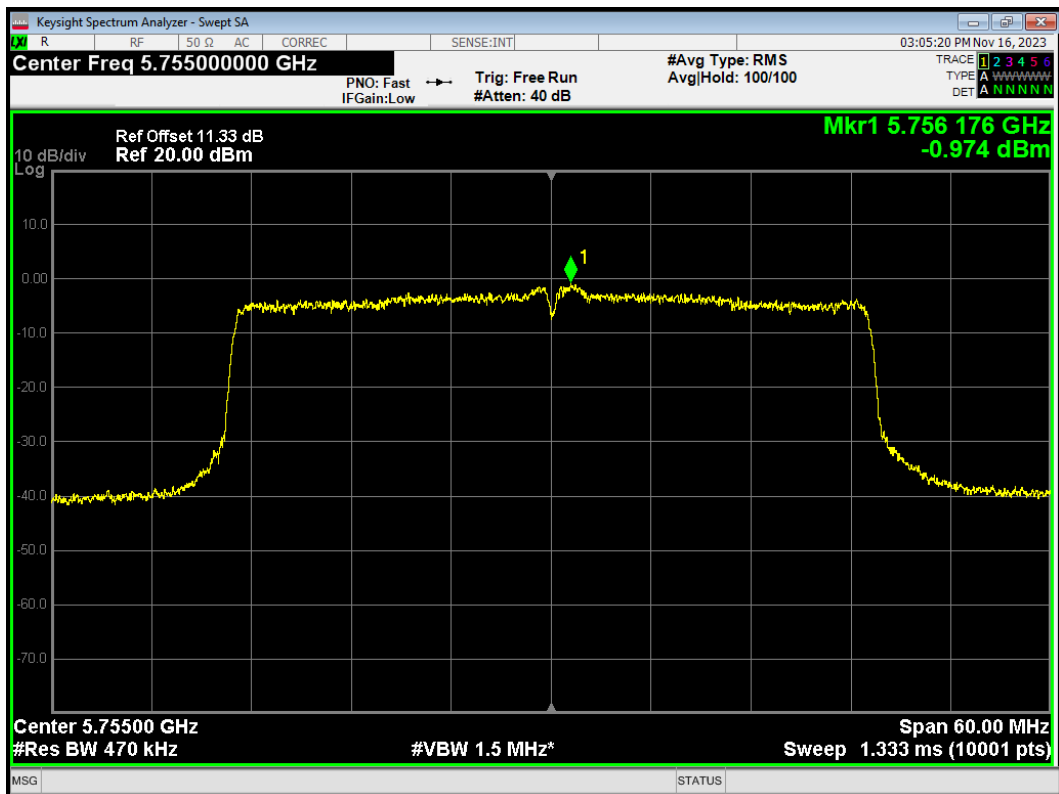


PSD 802.11ax(HE40) 5795MHz

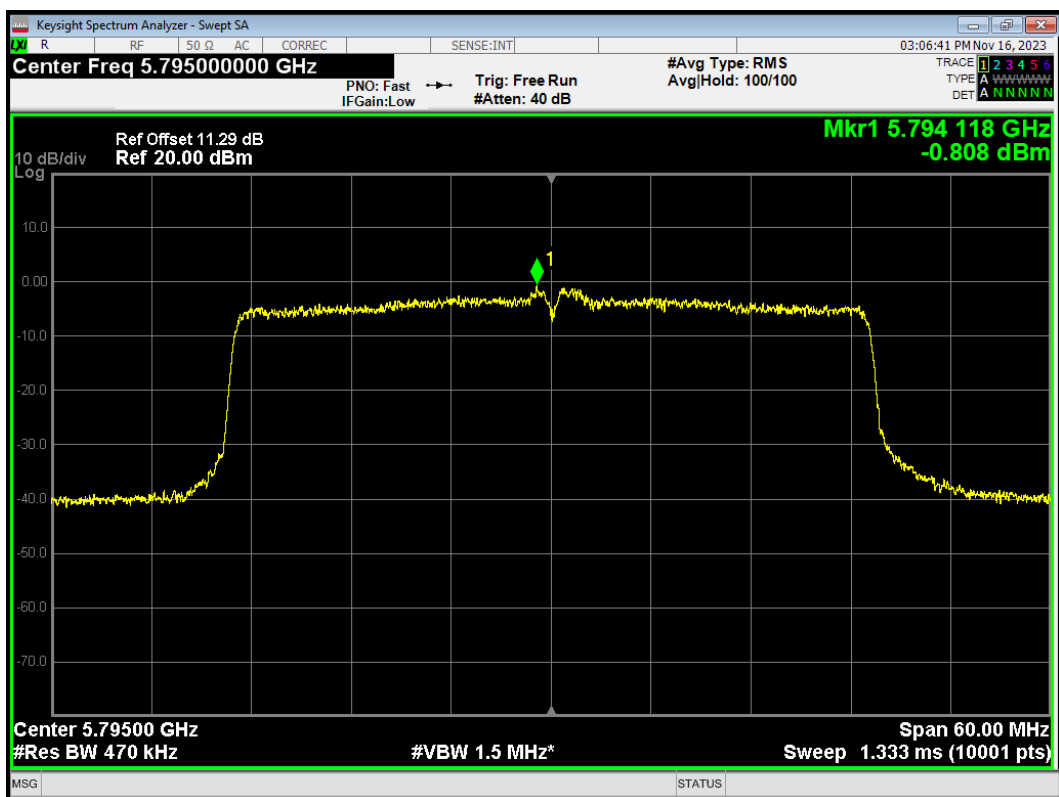


PSD 802.11ax(HE80) 5690MHz

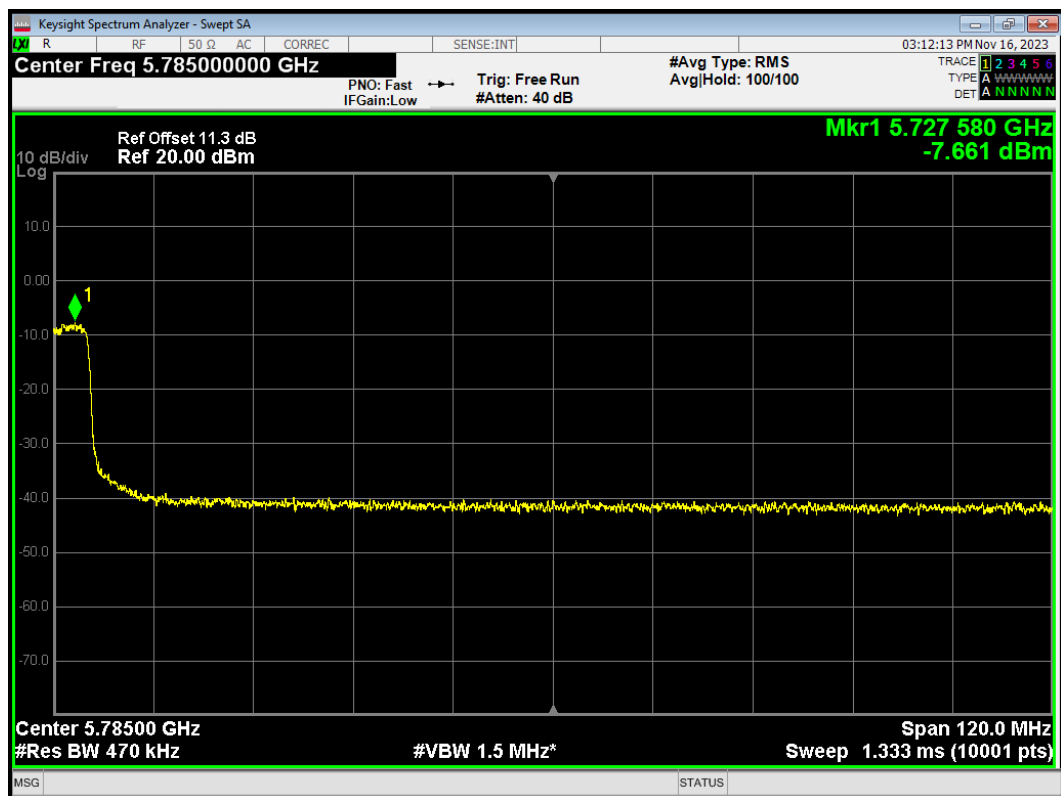


PSD 802.11ax(HE80) 5775MHz

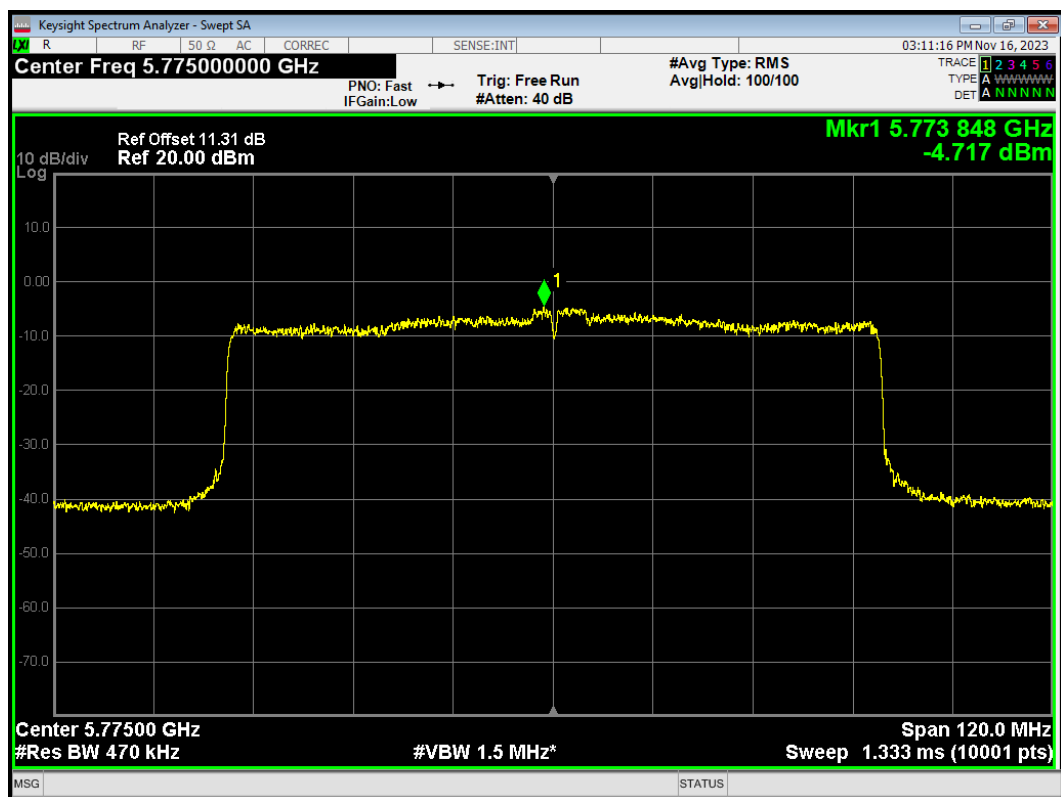


PSD 802.11n(HT20) 5720MHz

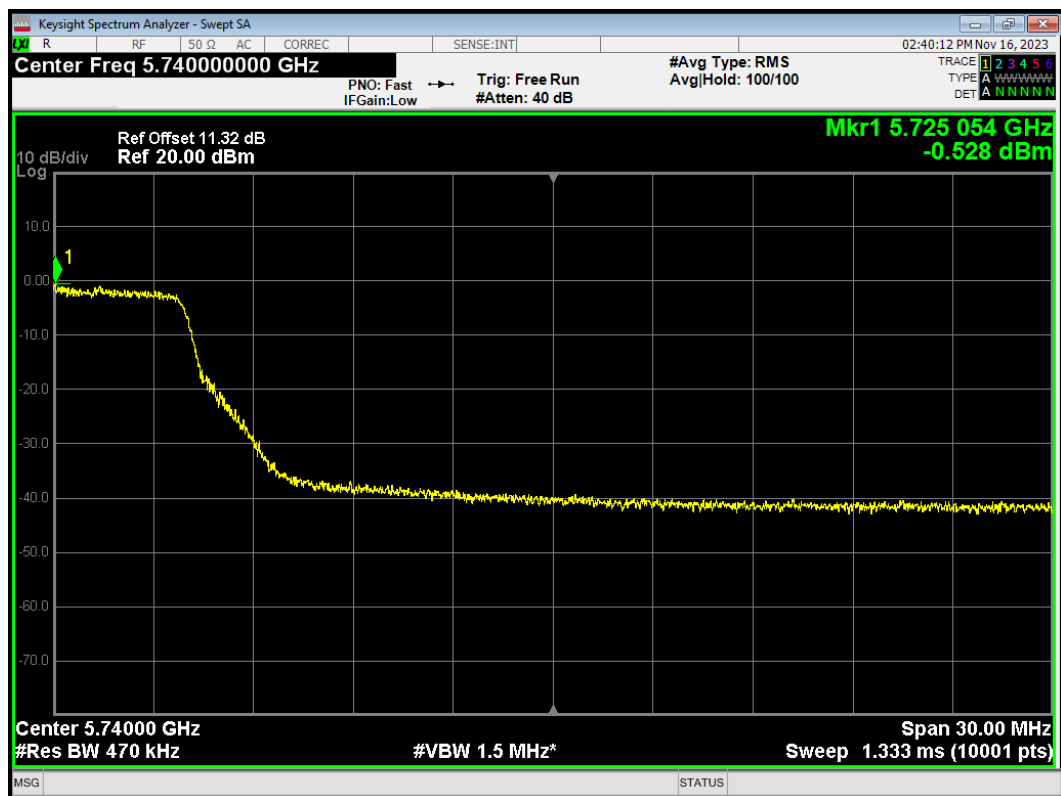


PSD 802.11n(HT20) 5745MHz

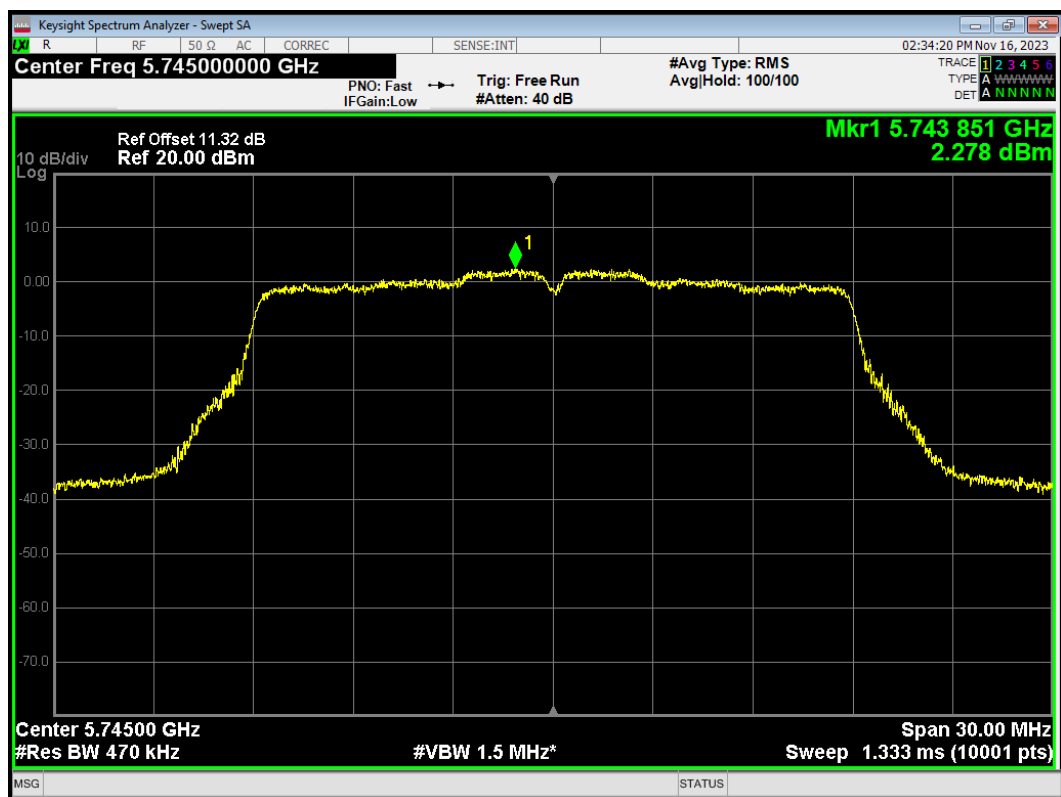


PSD 802.11n(HT20) 5785MHz

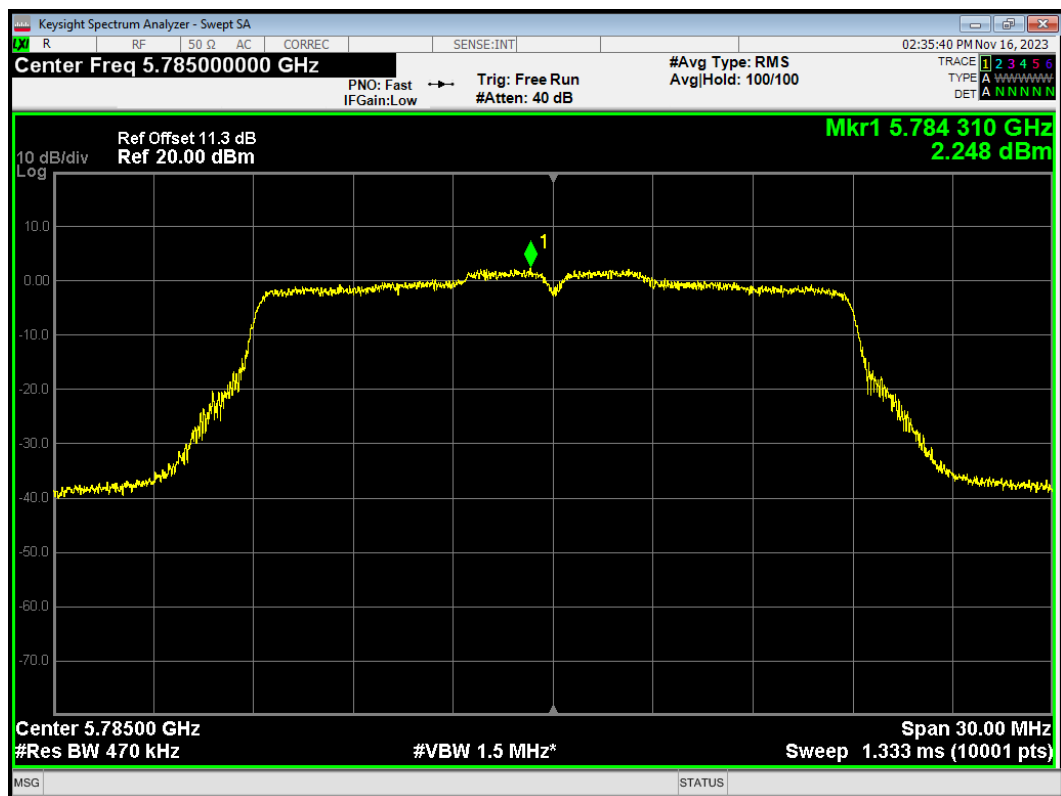


PSD 802.11n(HT20) 5825MHz

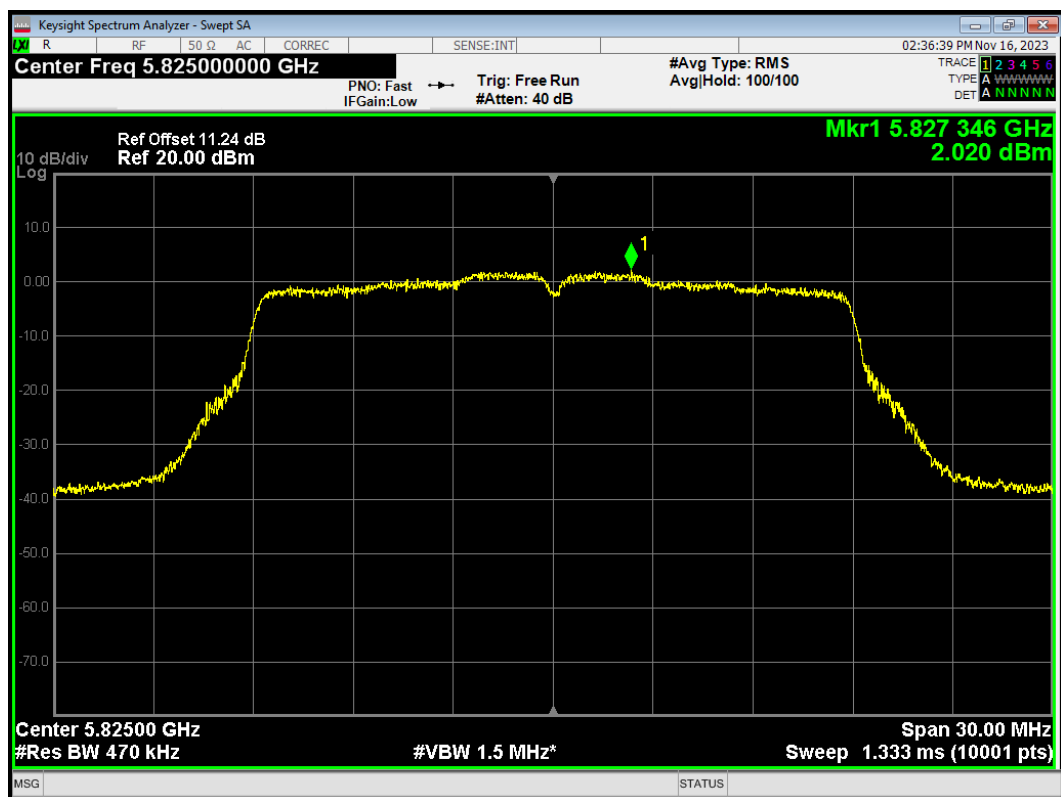


PSD 802.11n(HT40) 5710MHz

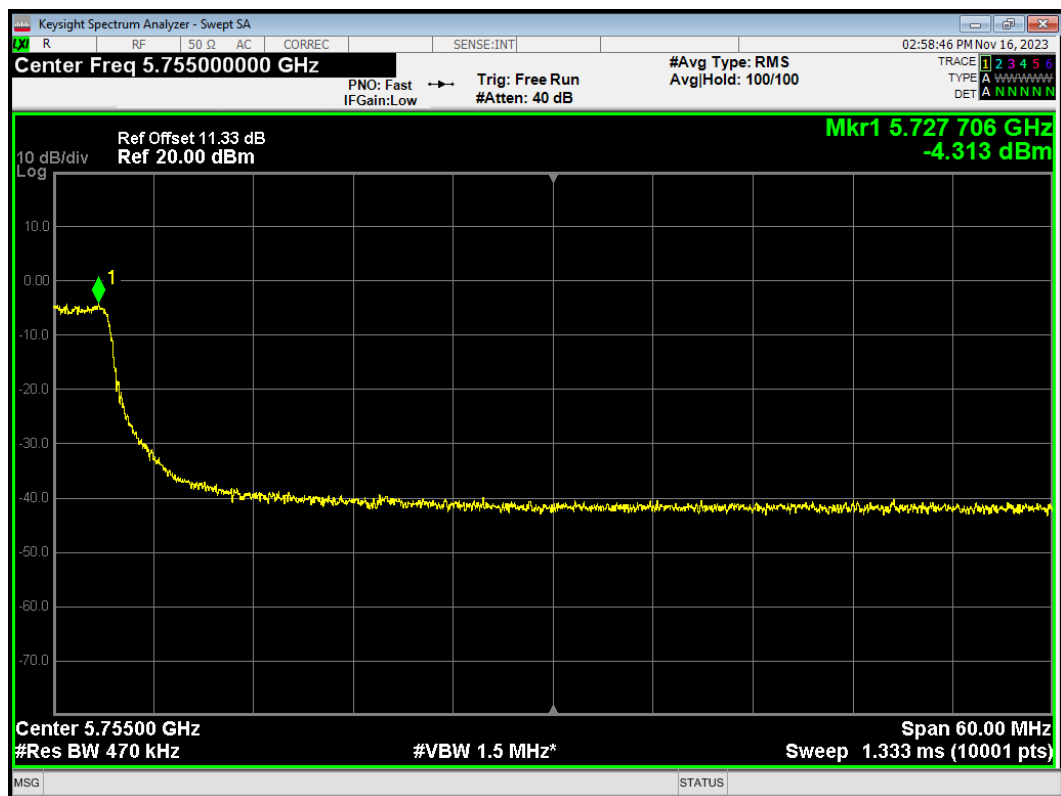

PSD 802.11n(HT40) 5755MHz

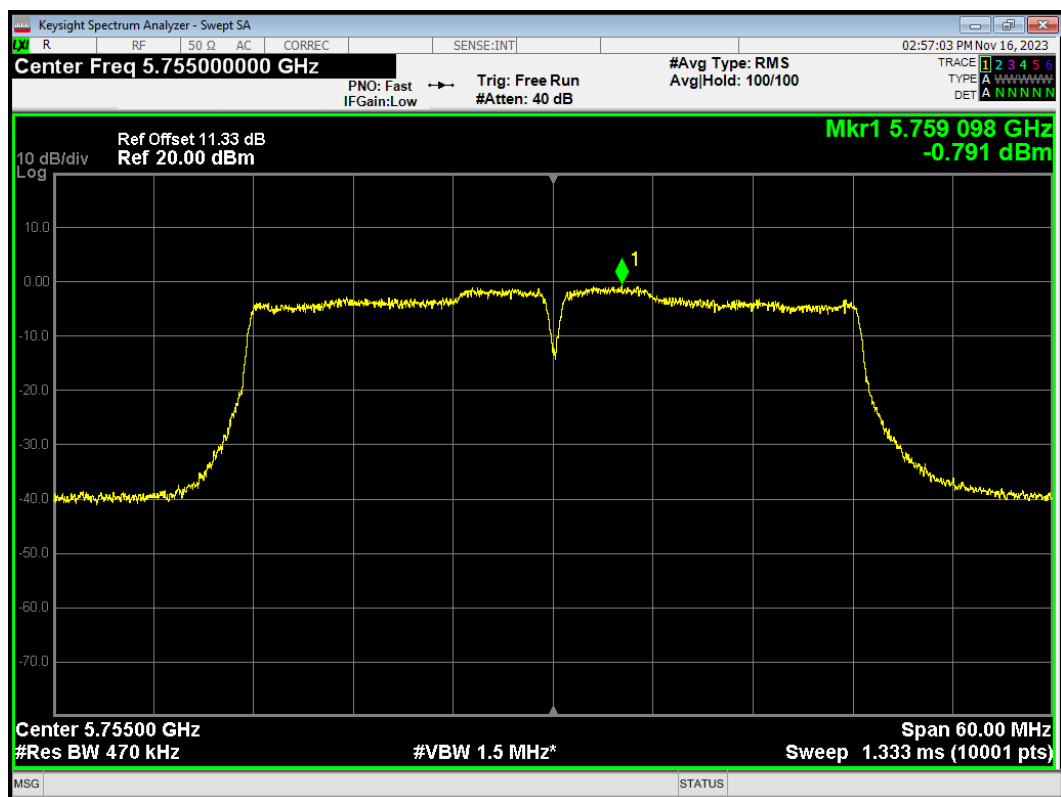


PSD 802.11n(HT40) 5795MHz

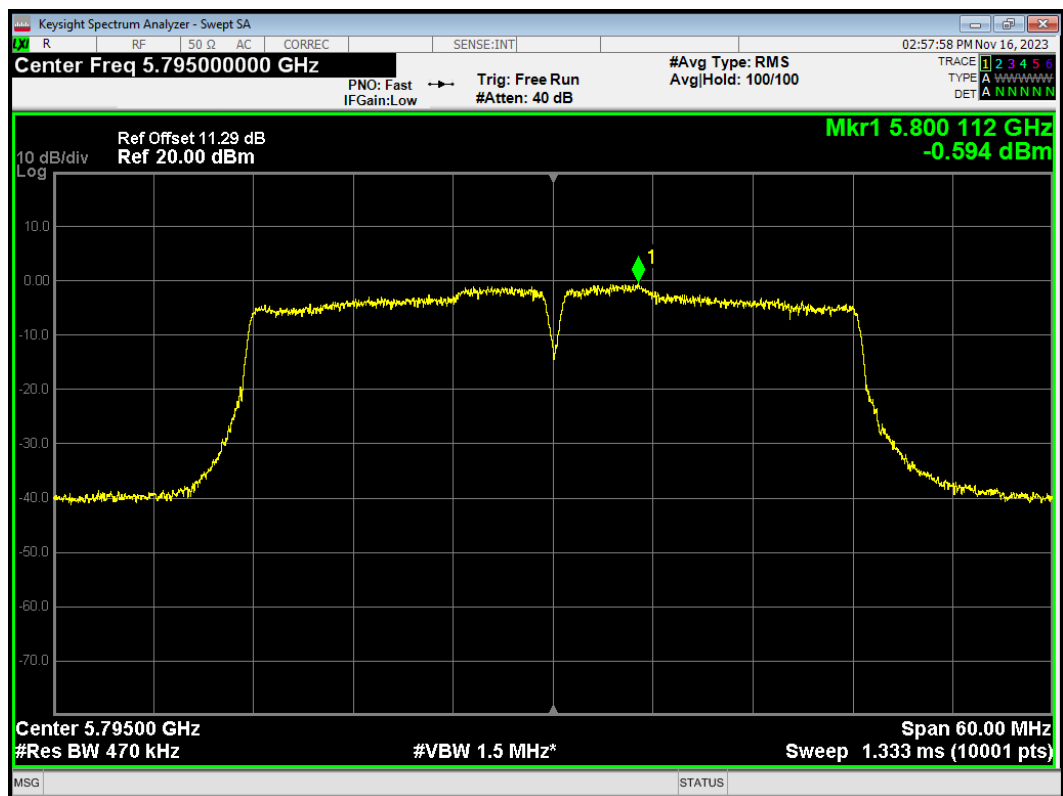


SISO Antenna 2

U-NII-1


PSD 802.11a 5180MHz

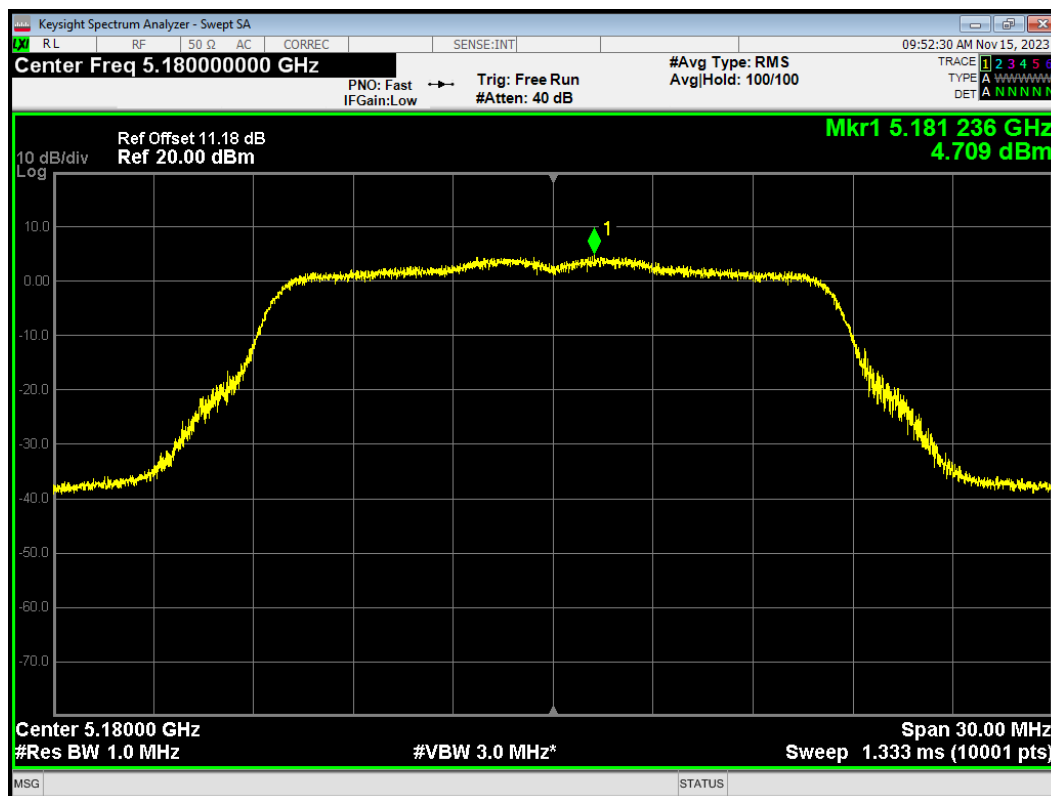


PSD 802.11a 5200MHz

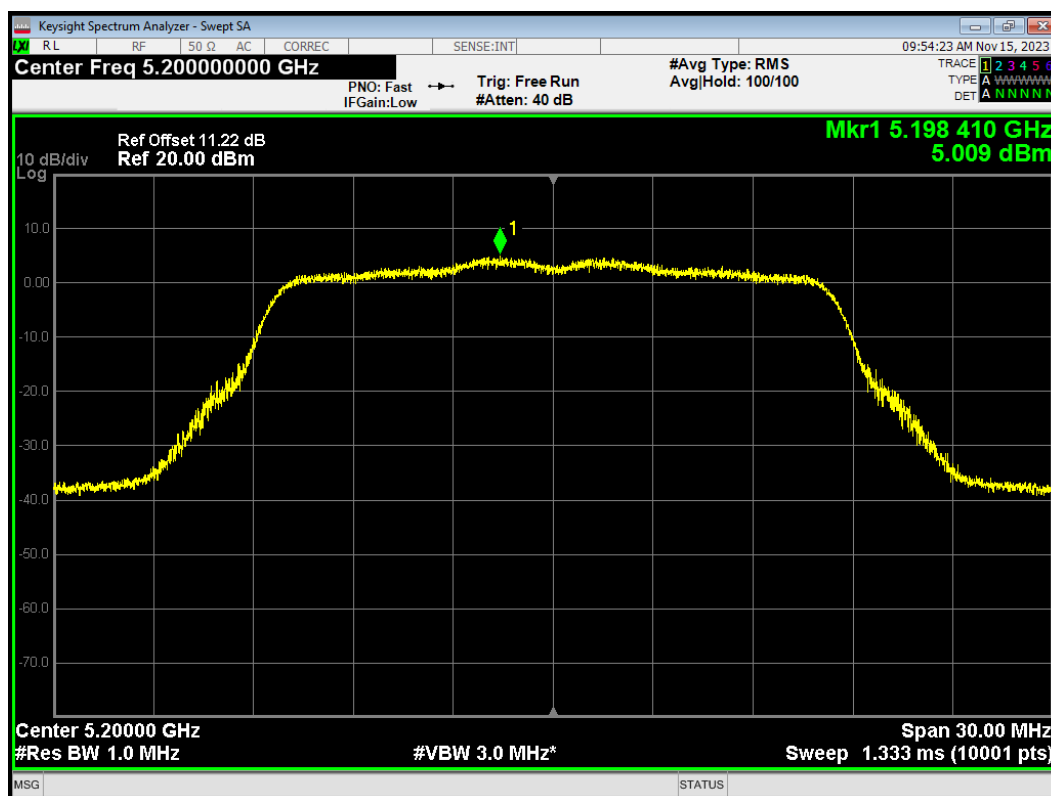


PSD 802.11a 5240MHz

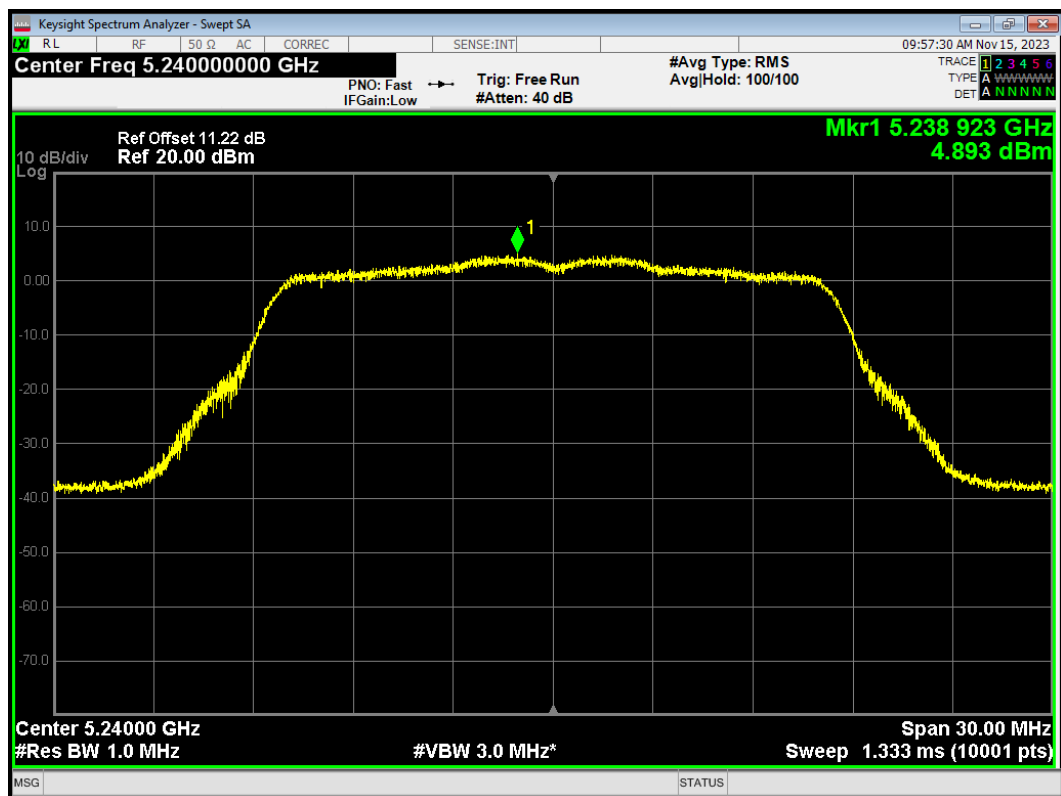


PSD 802.11ac(VHT20) 5180MHz

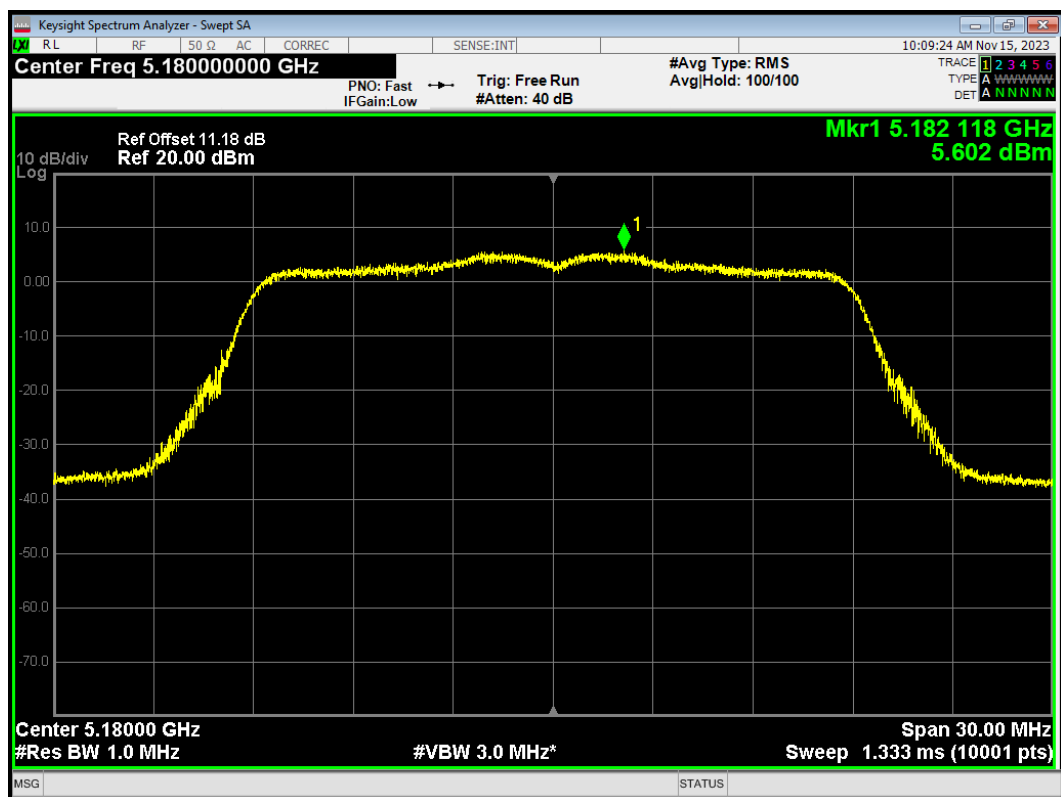


PSD 802.11ac(VHT20) 5200MHz

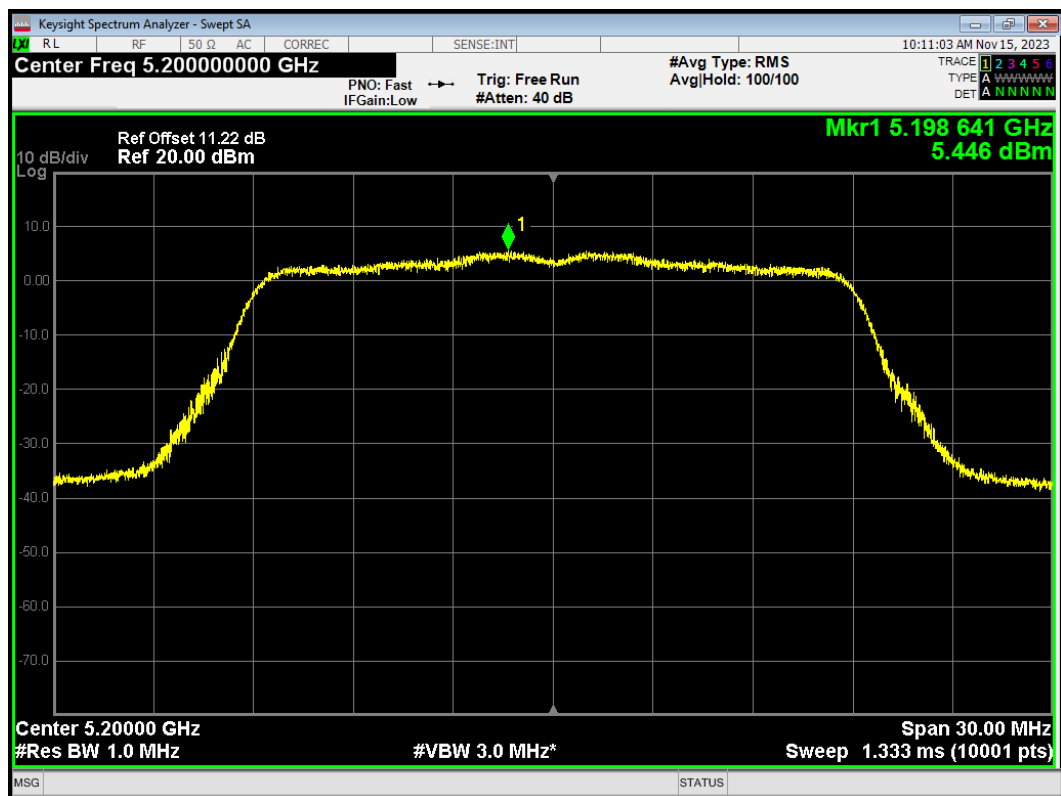


PSD 802.11ac(VHT20) 5240MHz

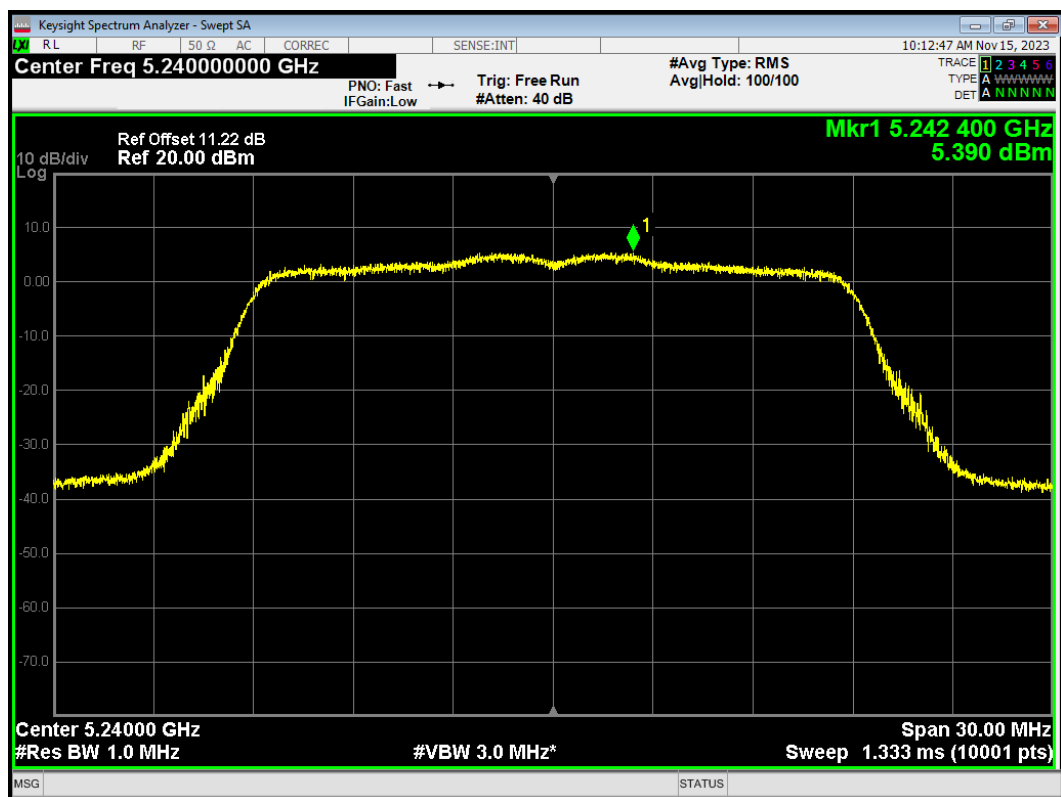


PSD 802.11ac(VHT40) 5190MHz

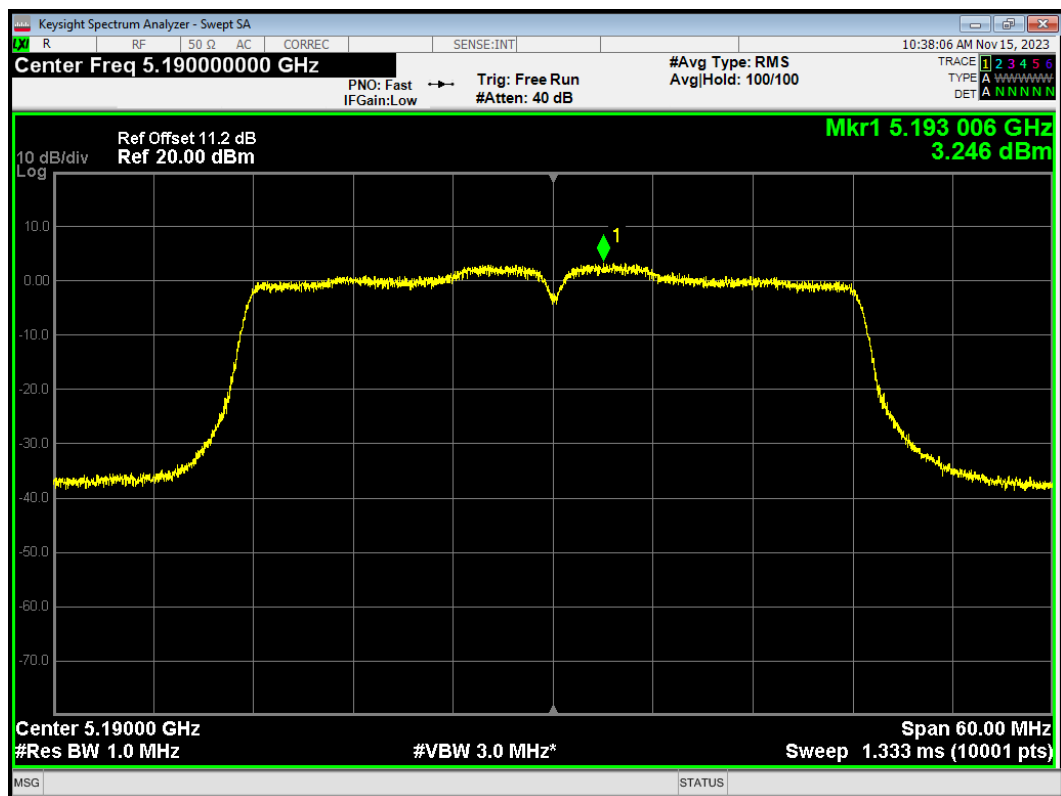


PSD 802.11ac(VHT40) 5230MHz

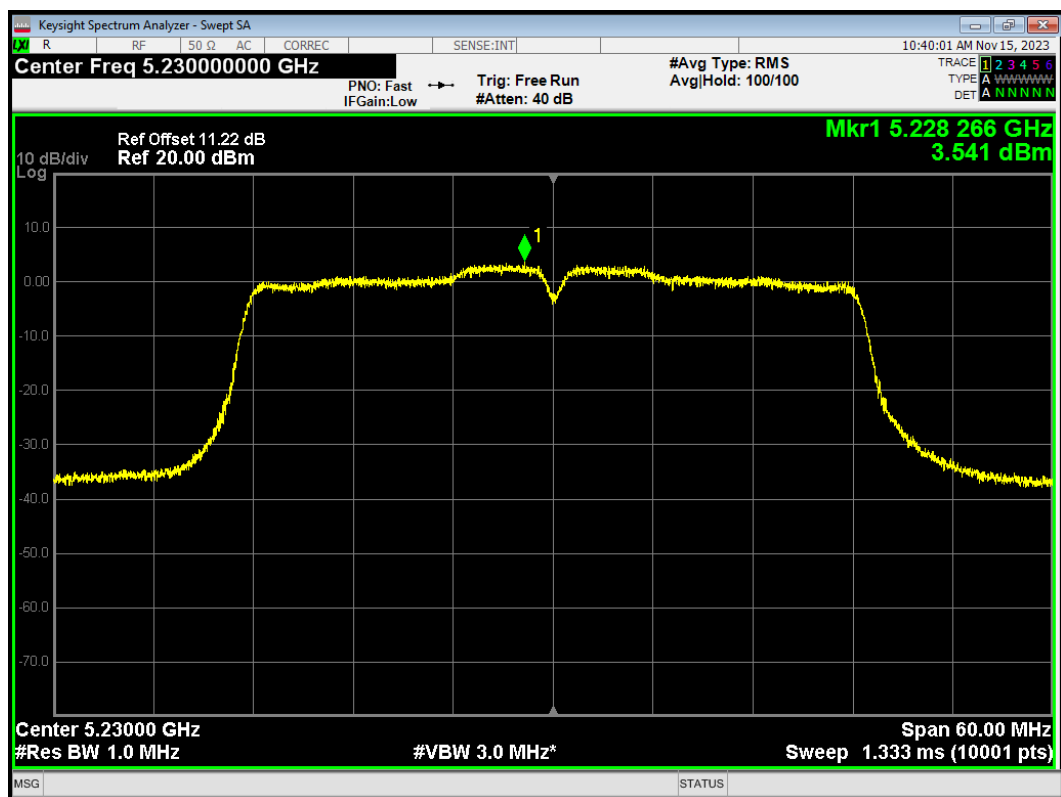


PSD 802.11ac(VHT80) 5210MHz

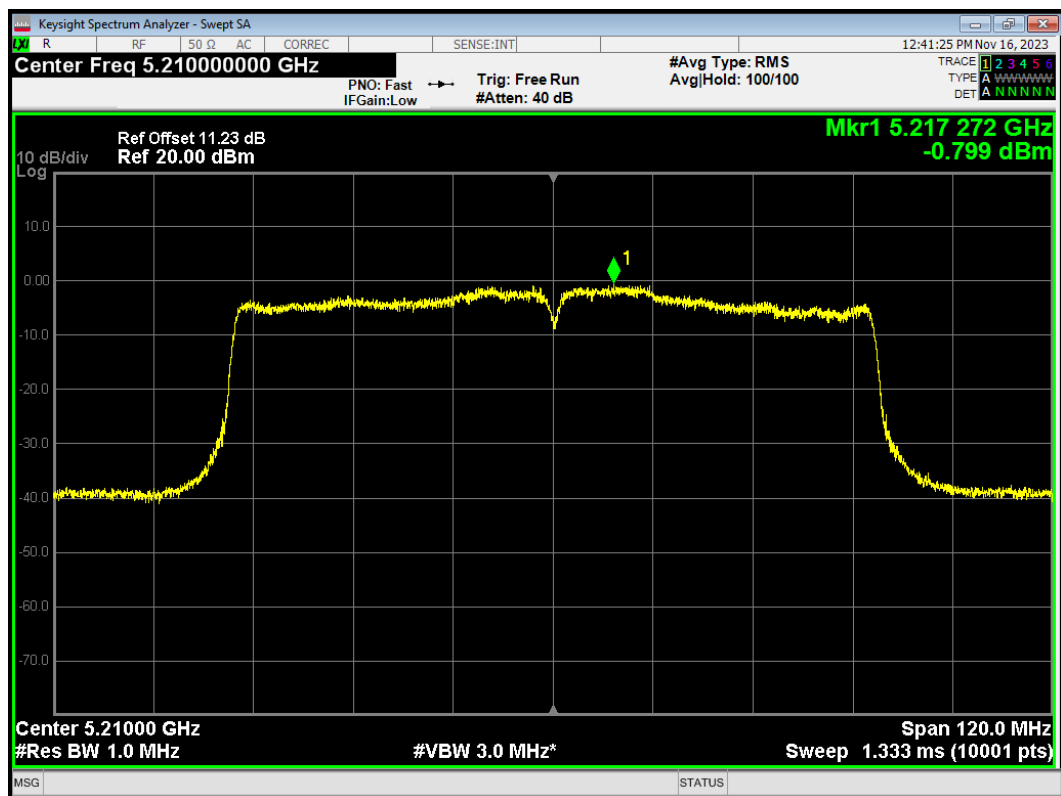


PSD 802.11ax(HE20) 5180MHz

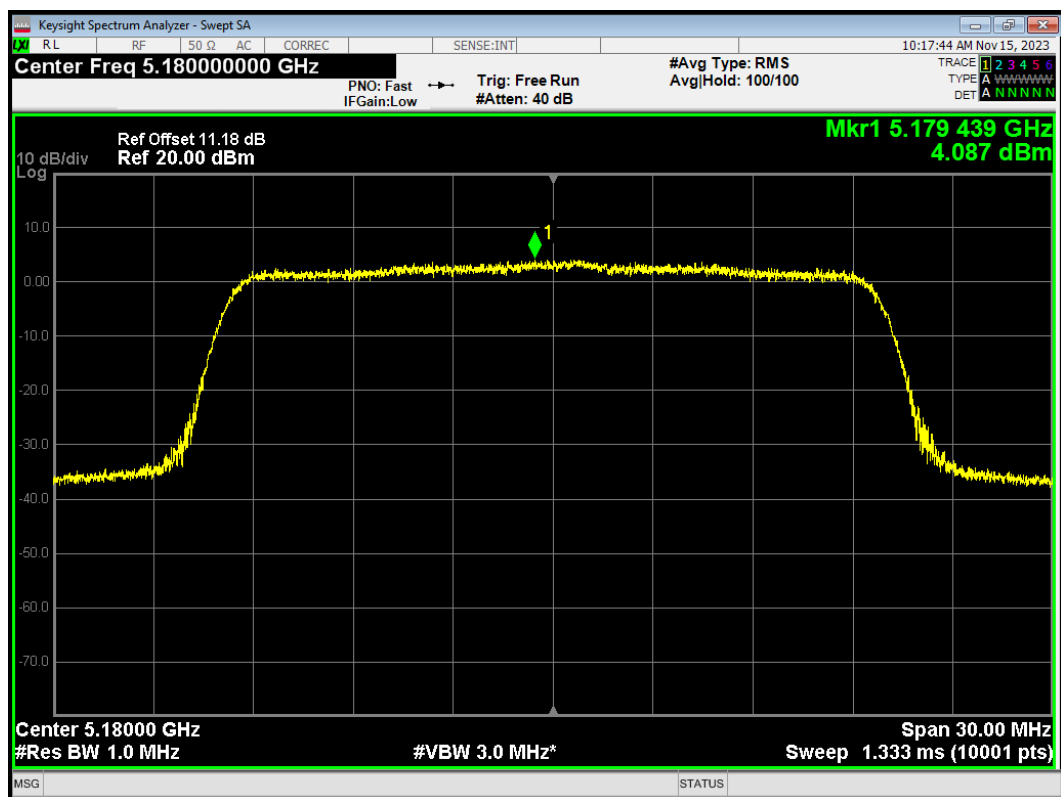


PSD 802.11ax(HE20) 5200MHz

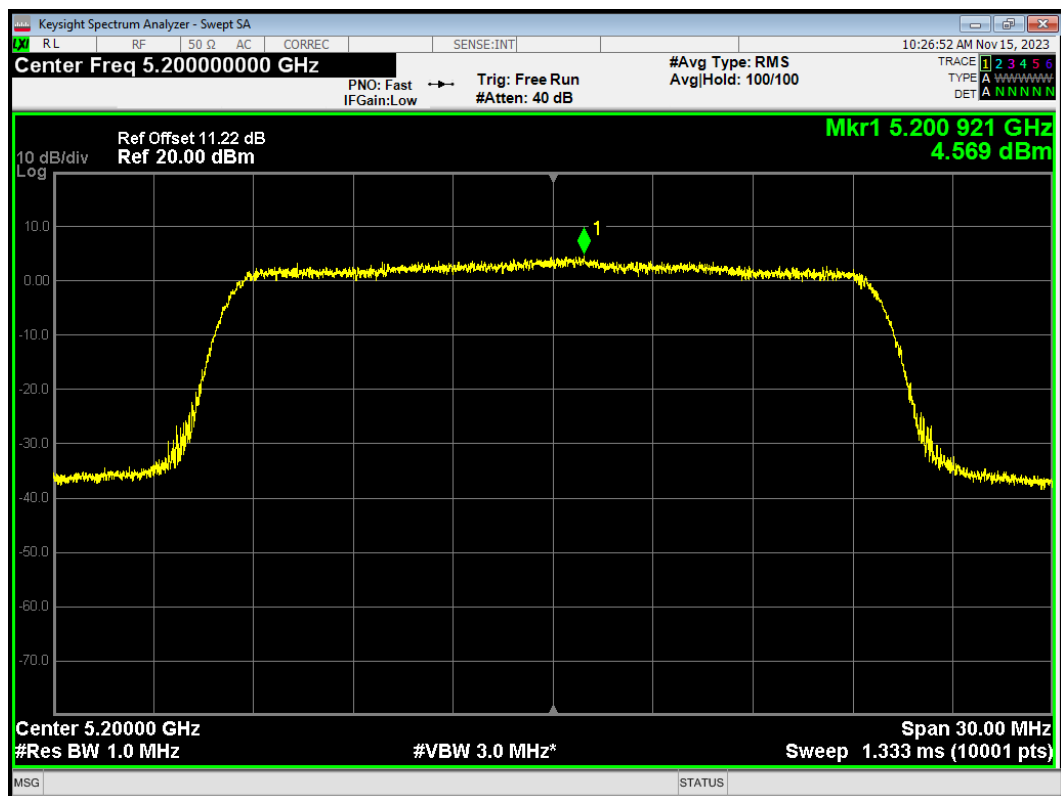


PSD 802.11ax(HE20) 5240MHz

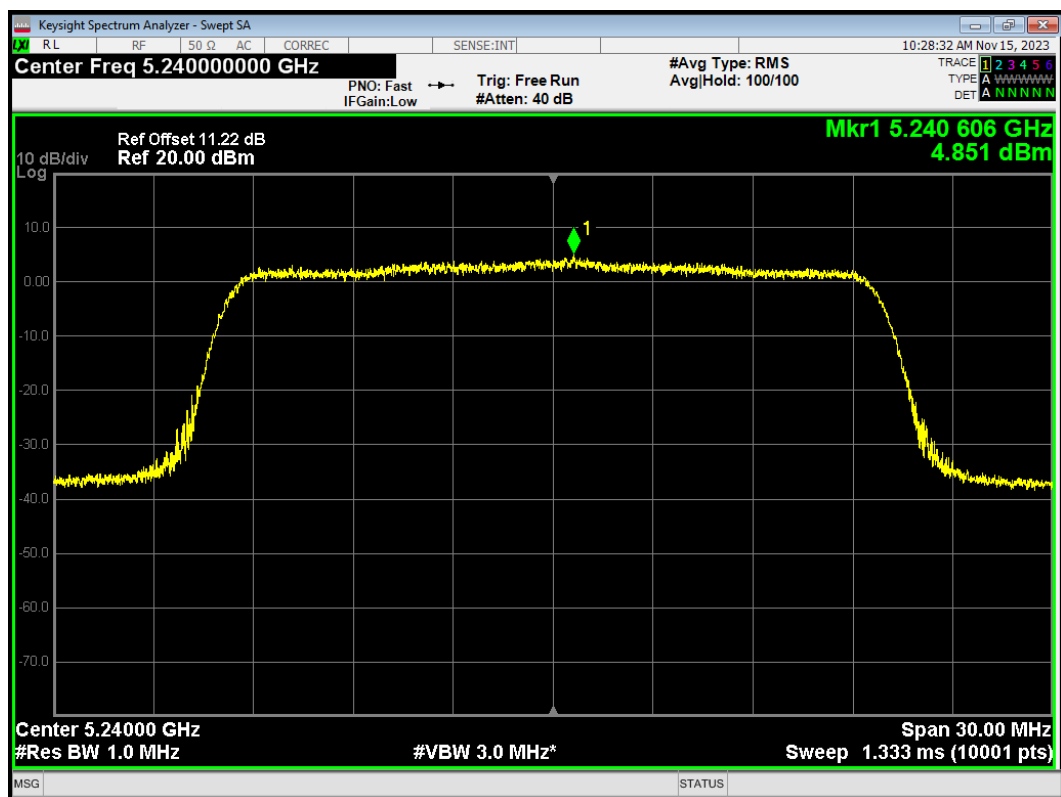


PSD 802.11ax(HE40) 5190MHz

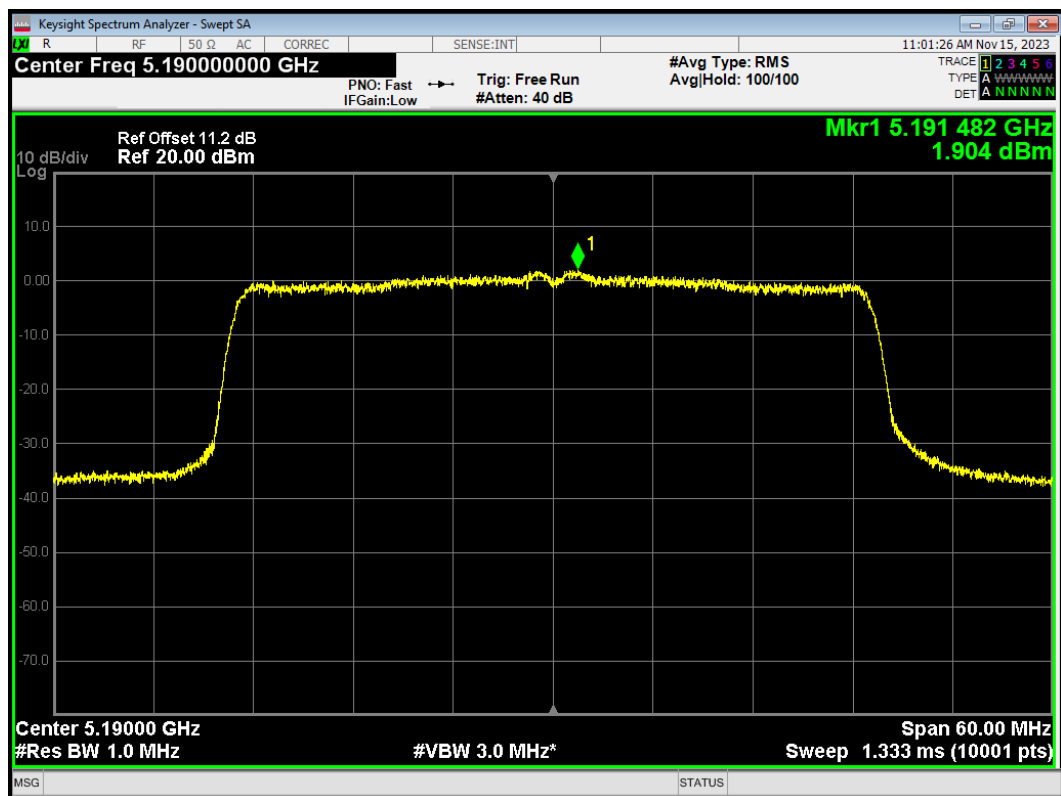


PSD 802.11ax(HE40) 5230MHz

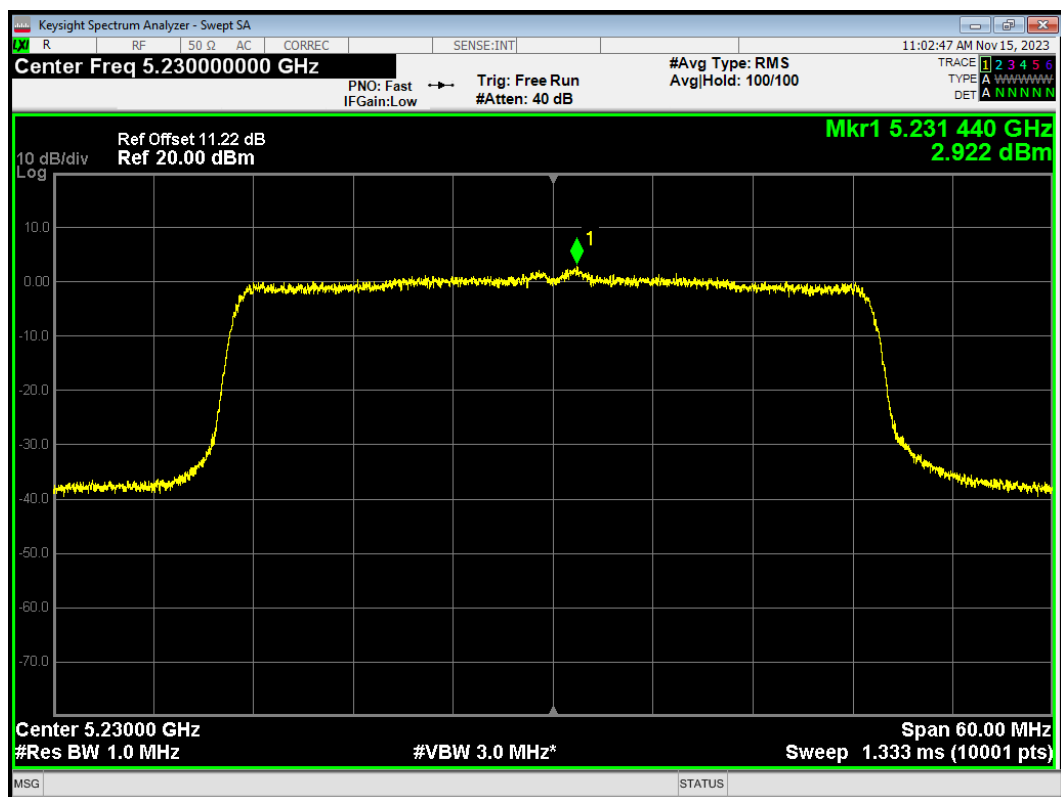


PSD 802.11ax(HE80) 5210MHz

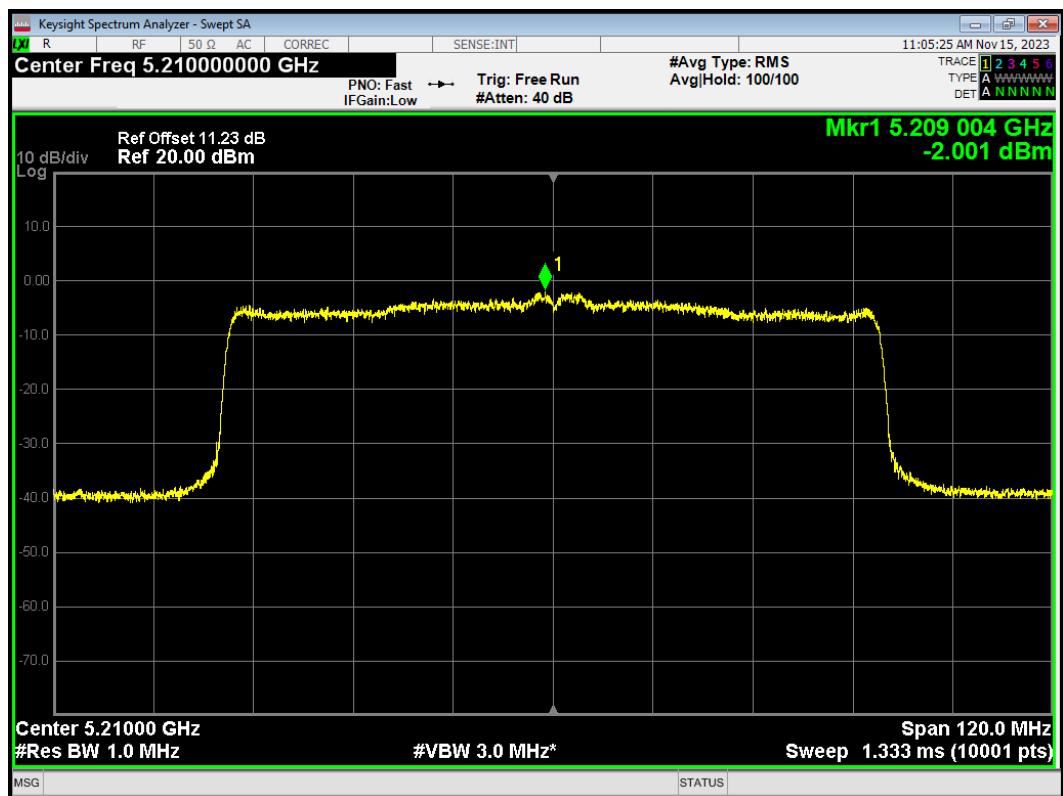


PSD 802.11n(HT20) 5180MHz

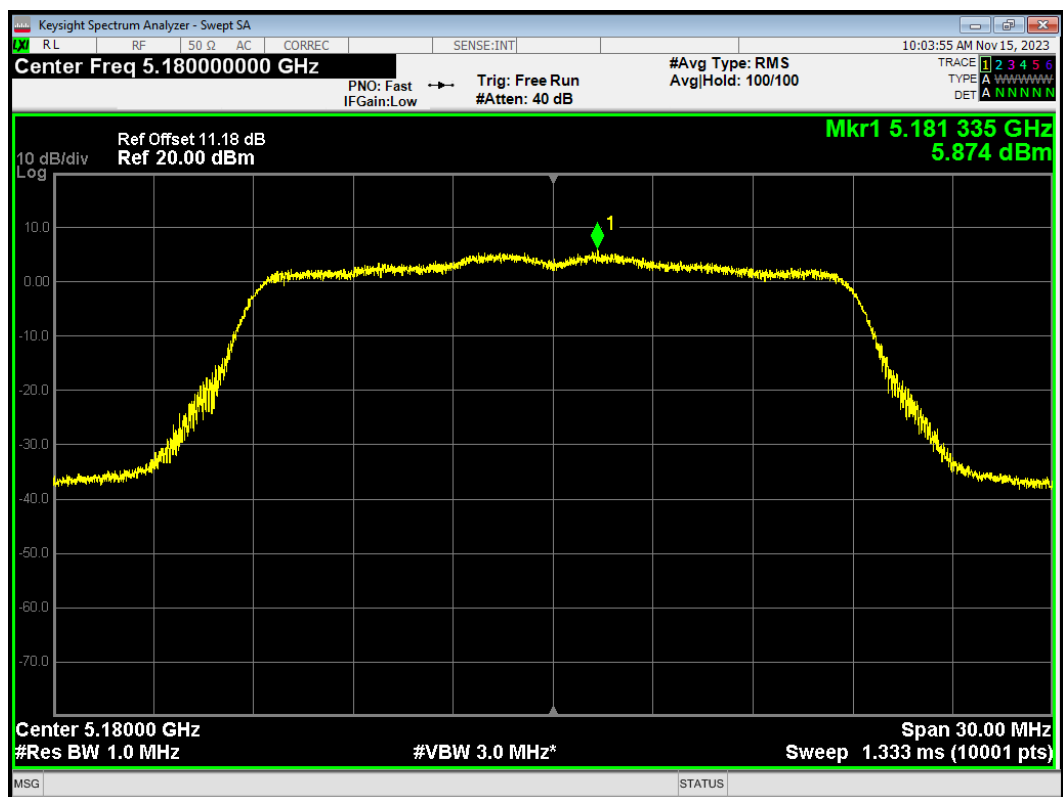


PSD 802.11n(HT20) 5200MHz

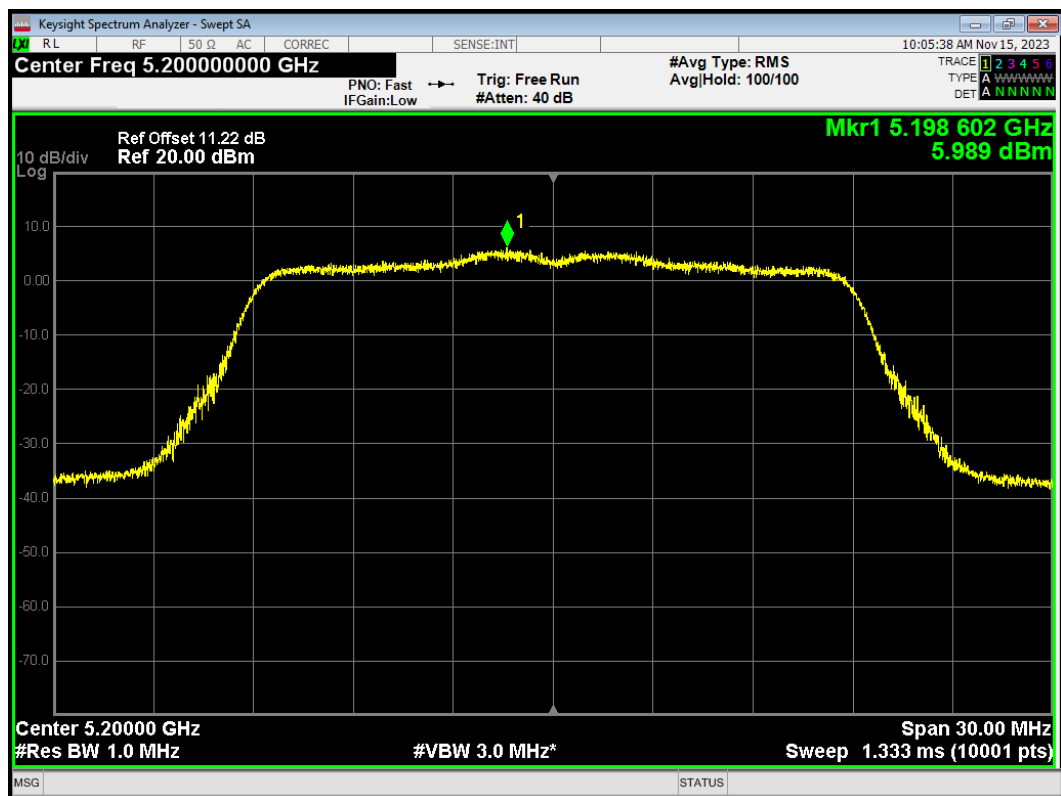


PSD 802.11n(HT20) 5240MHz

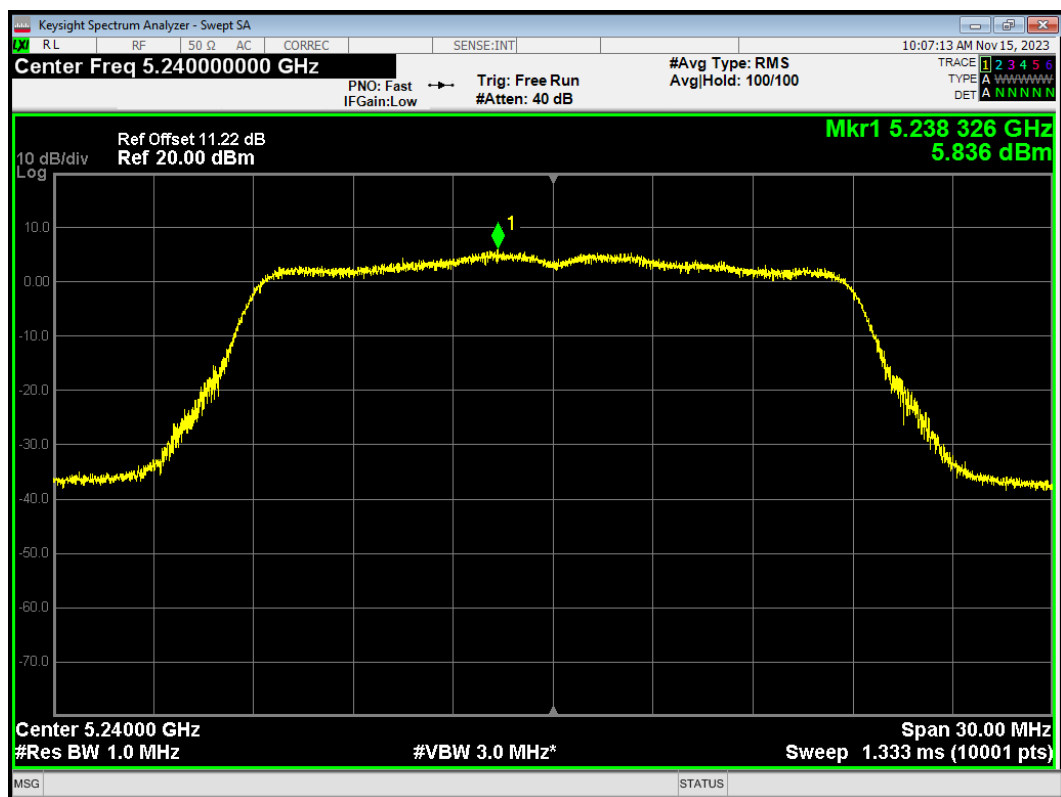

PSD 802.11n(HT40) 5190MHz

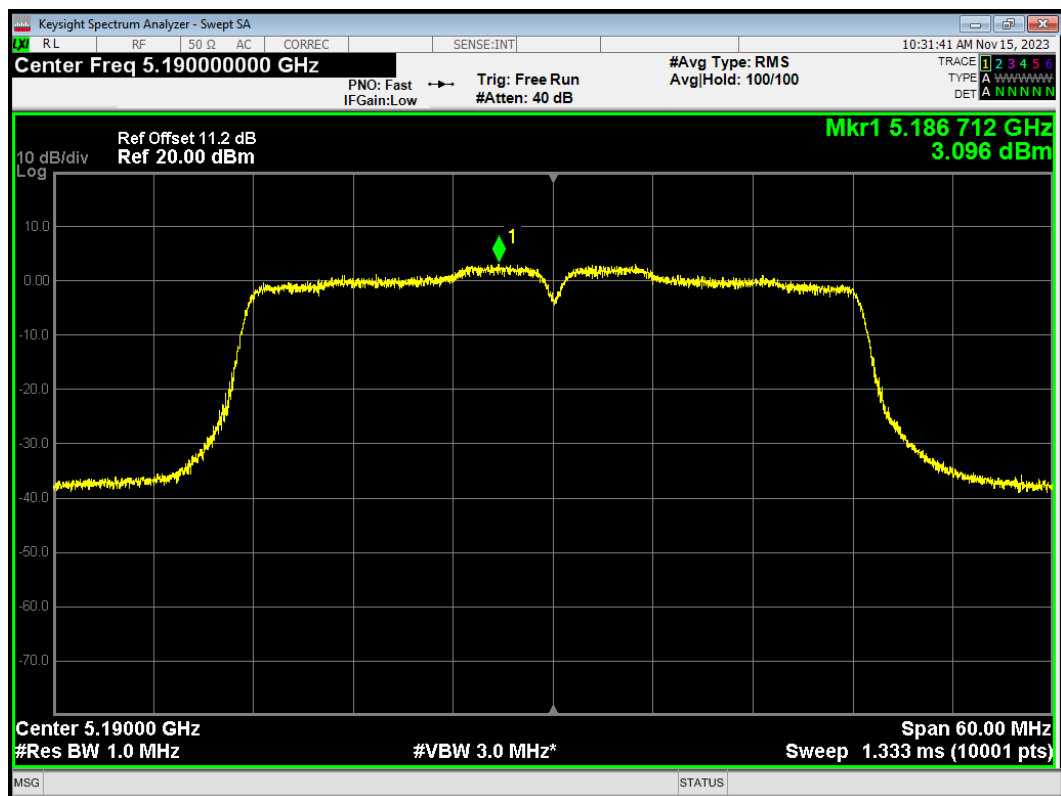


PSD 802.11n(HT40) 5230MHz

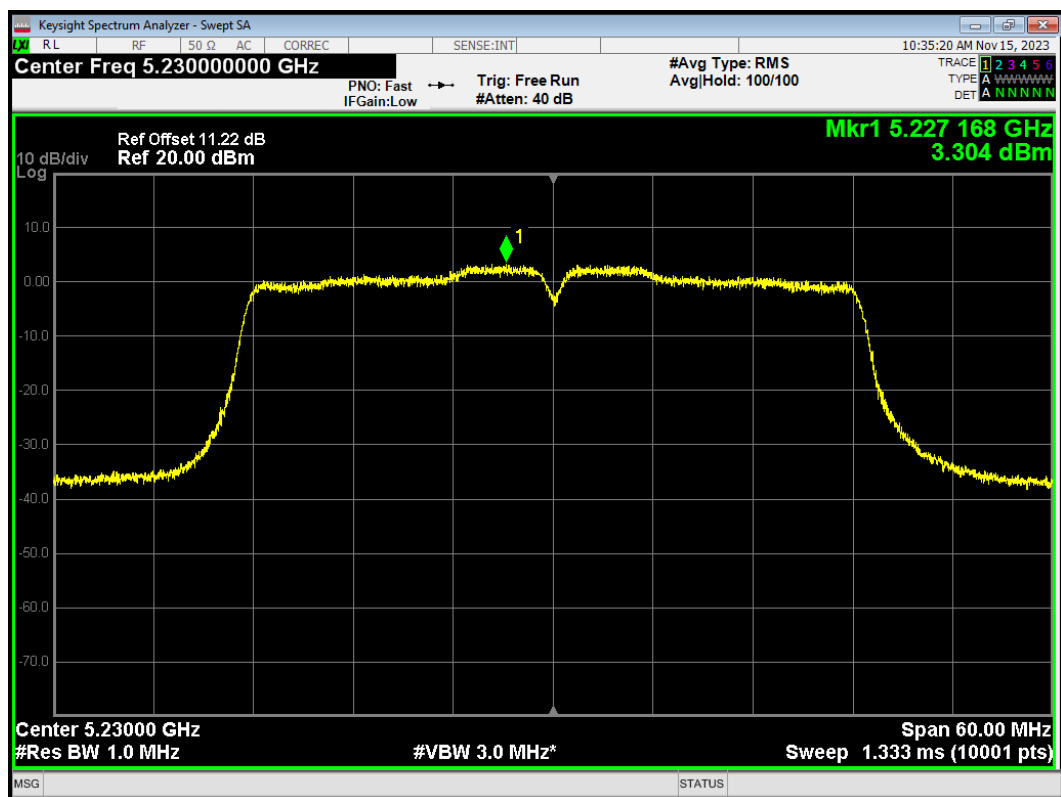


U-NII-2A


PSD 802.11a 5260MHz

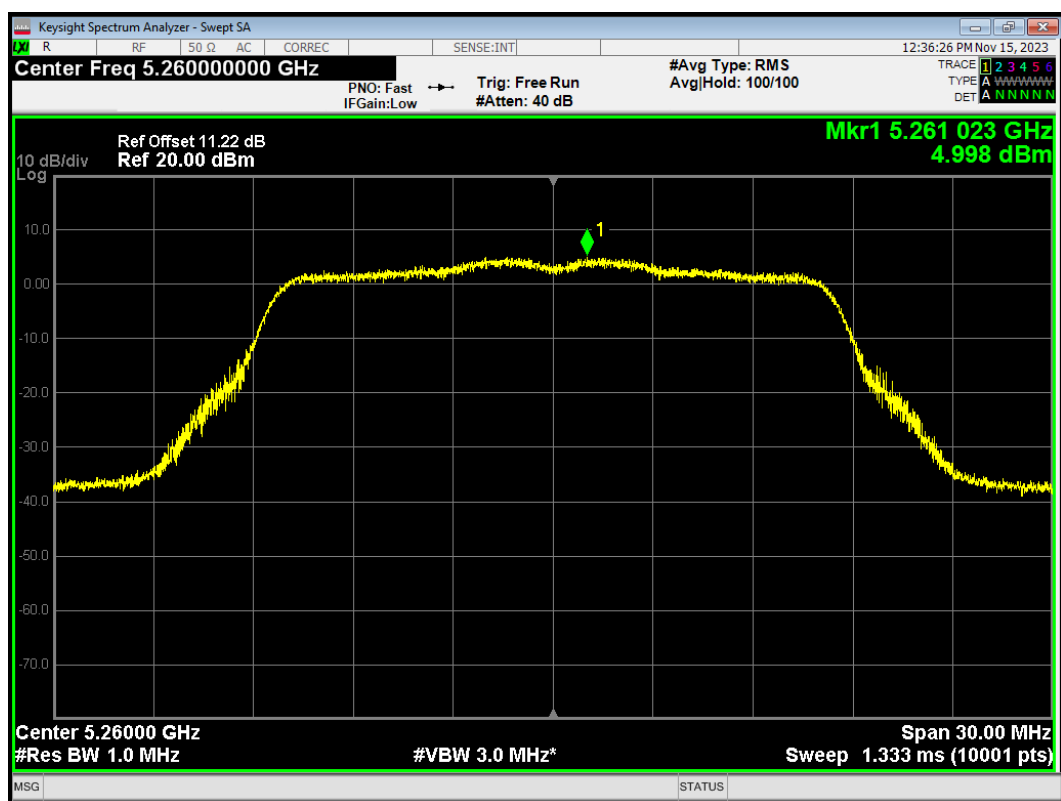


PSD 802.11a 5300MHz

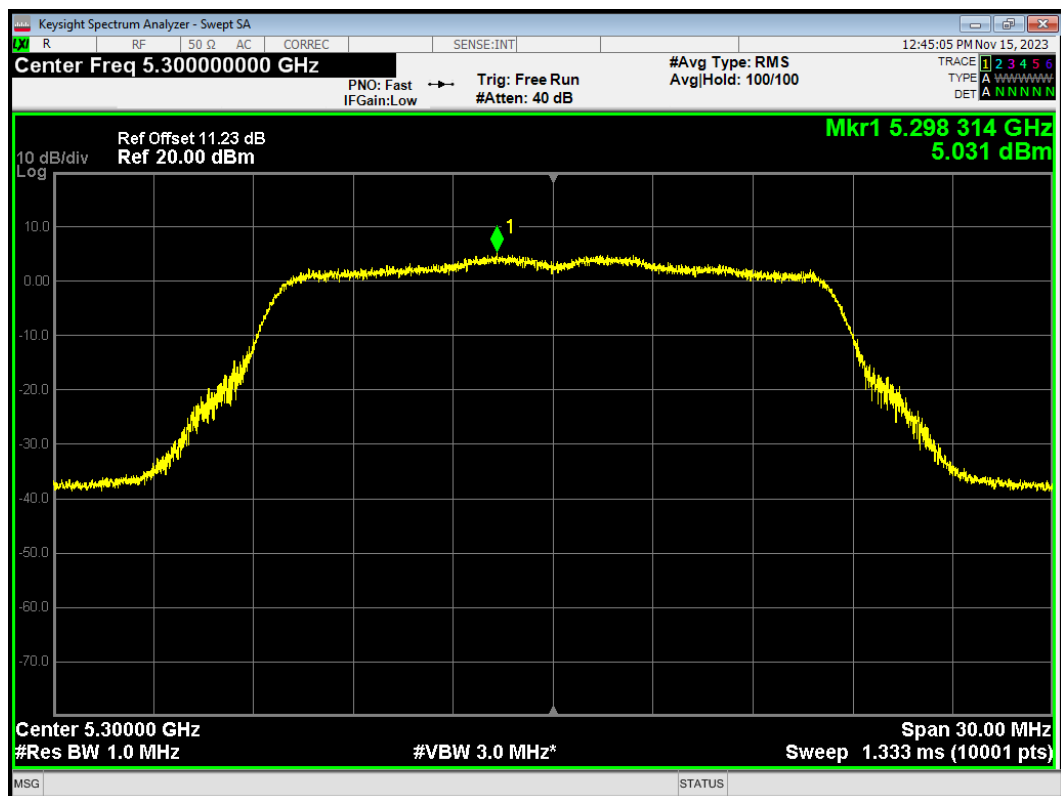


PSD 802.11a 5320MHz

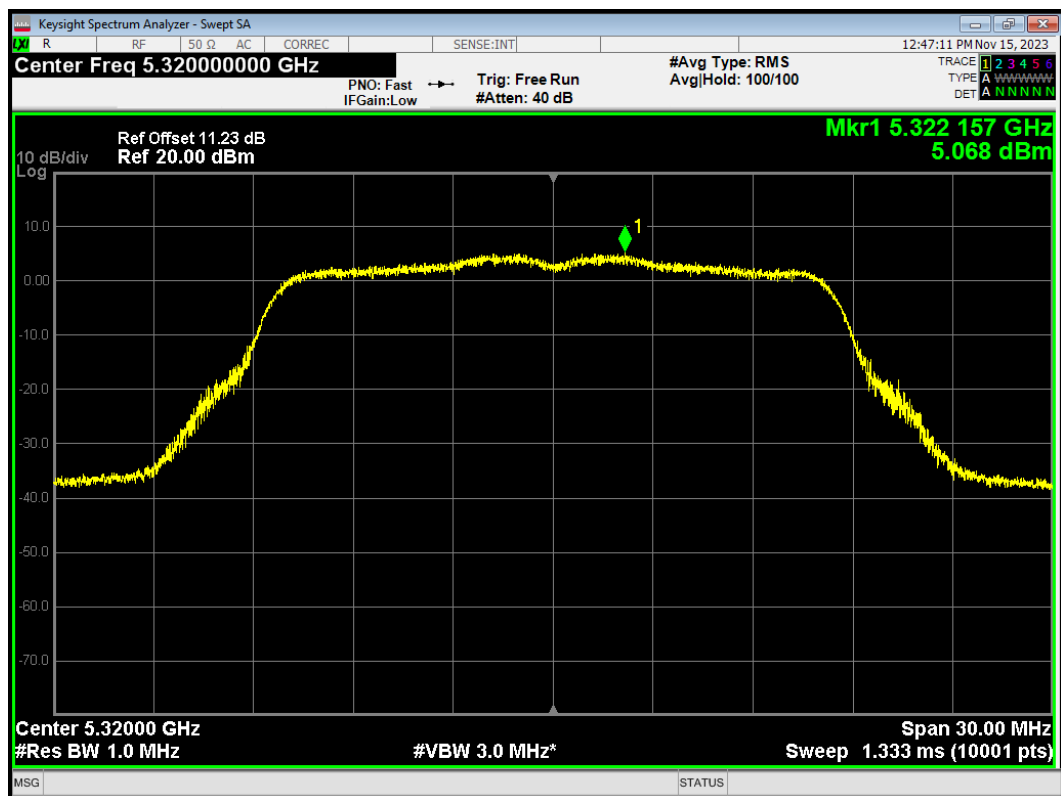


PSD 802.11ac(VHT20) 5260MHz

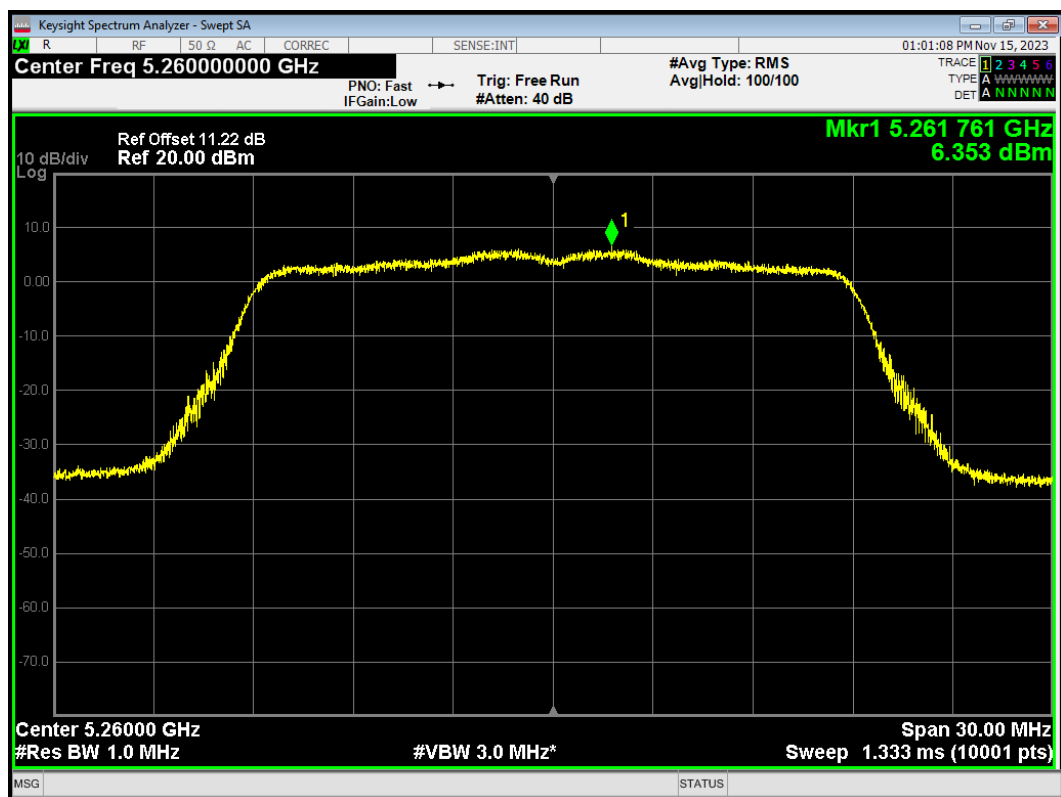


PSD 802.11ac(VHT20) 5300MHz

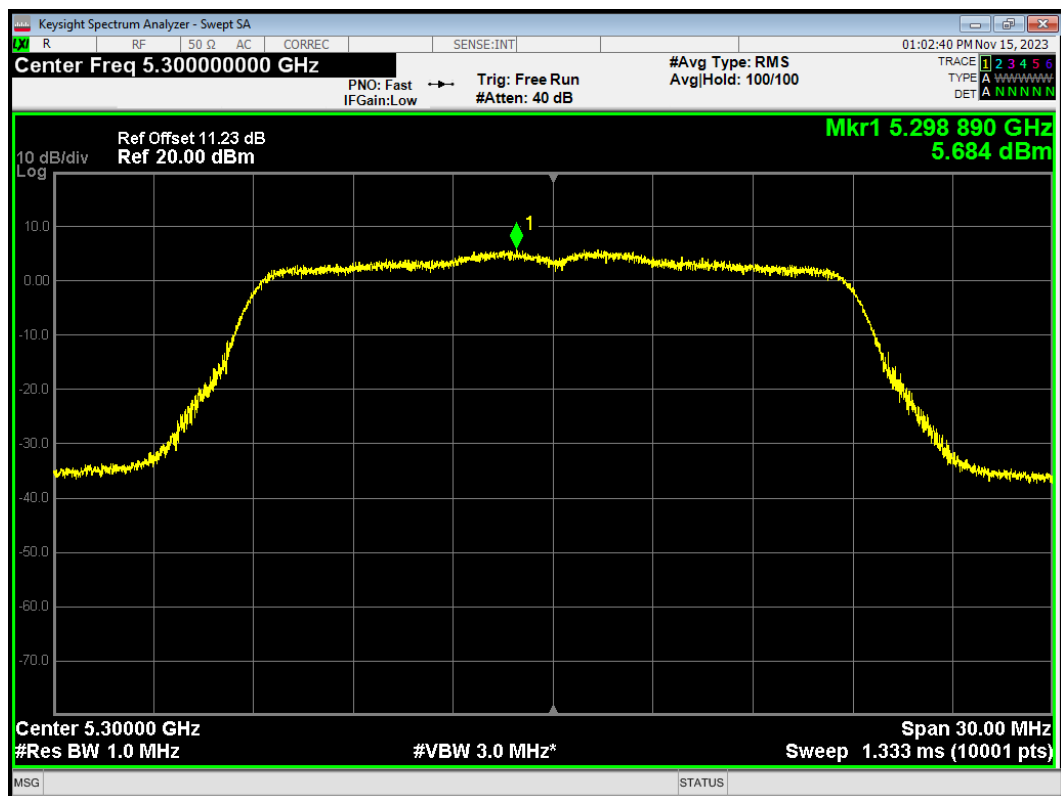


PSD 802.11ac(VHT20) 5320MHz

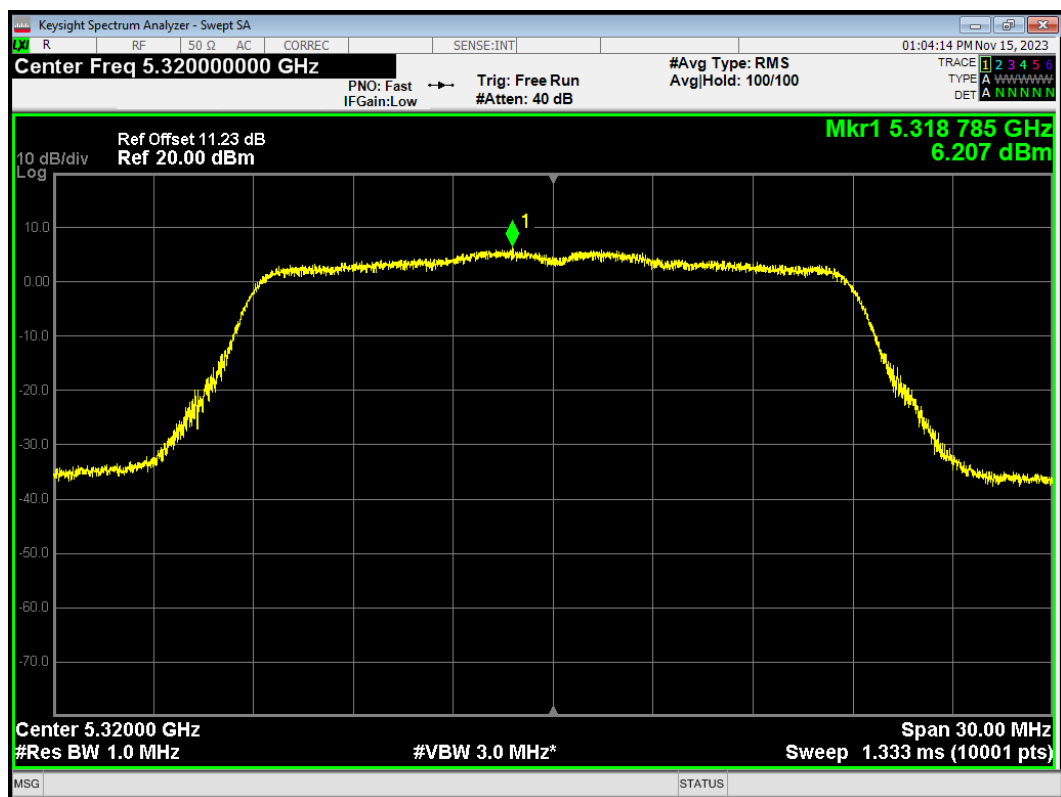


PSD 802.11ac(VHT40) 5270MHz

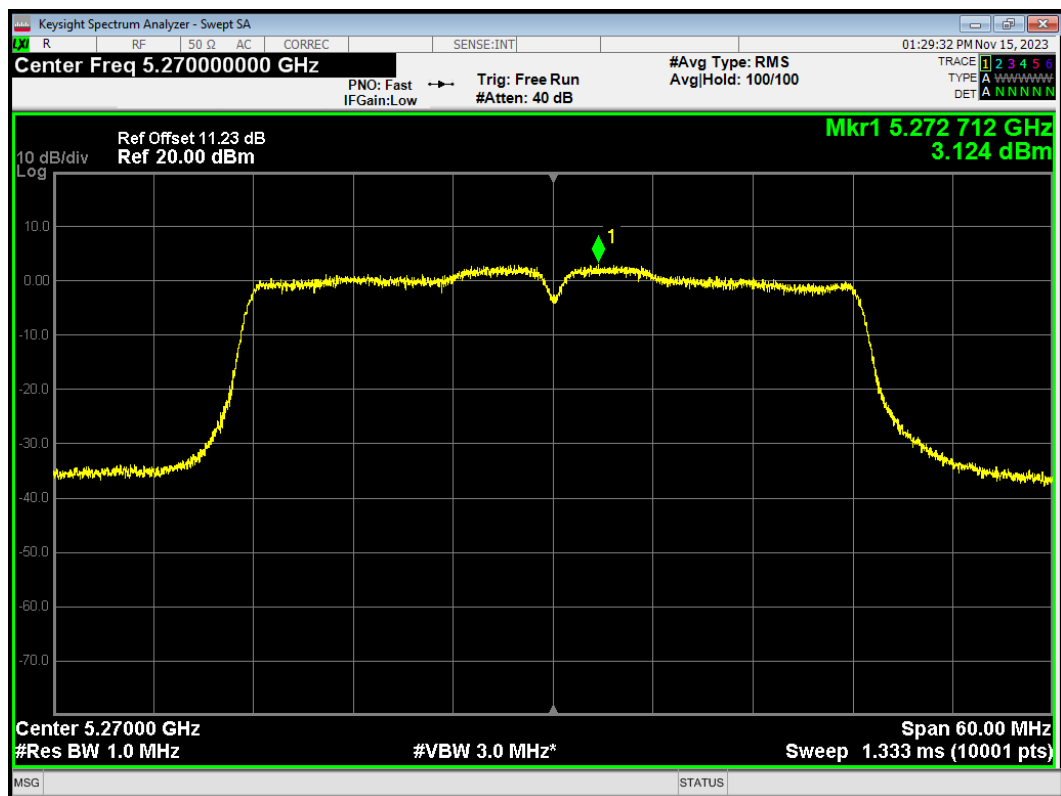


PSD 802.11ac(VHT40) 5310MHz

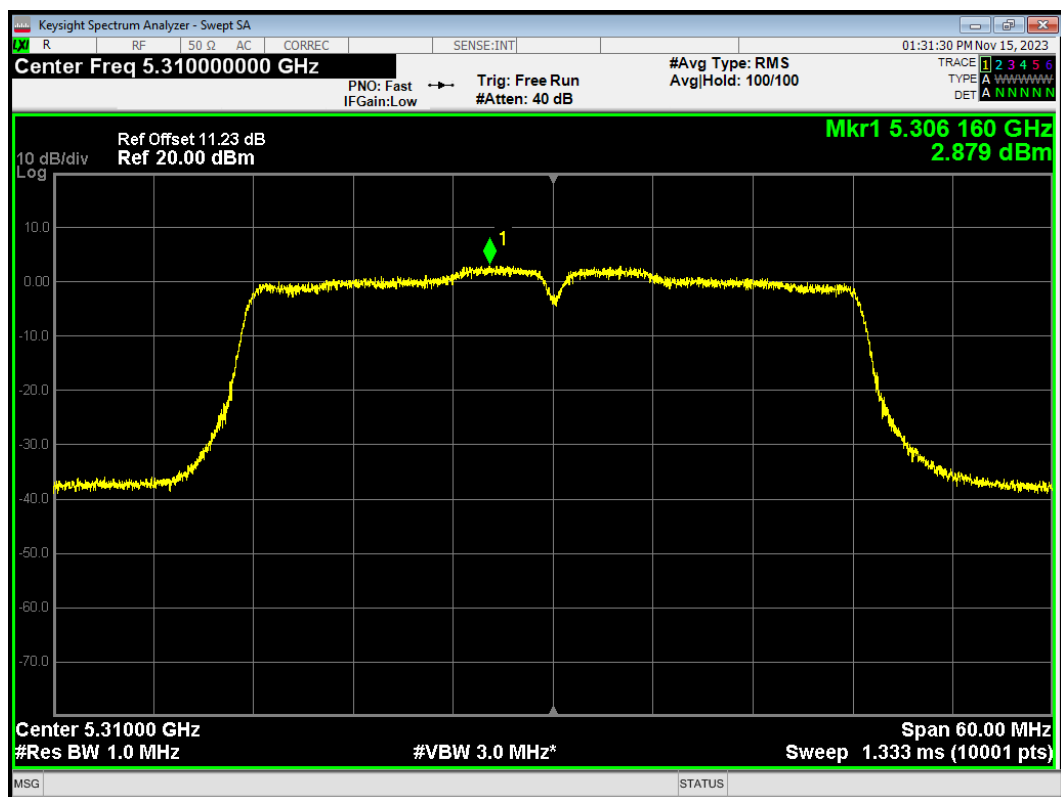


PSD 802.11ac(VHT80) 5290MHz

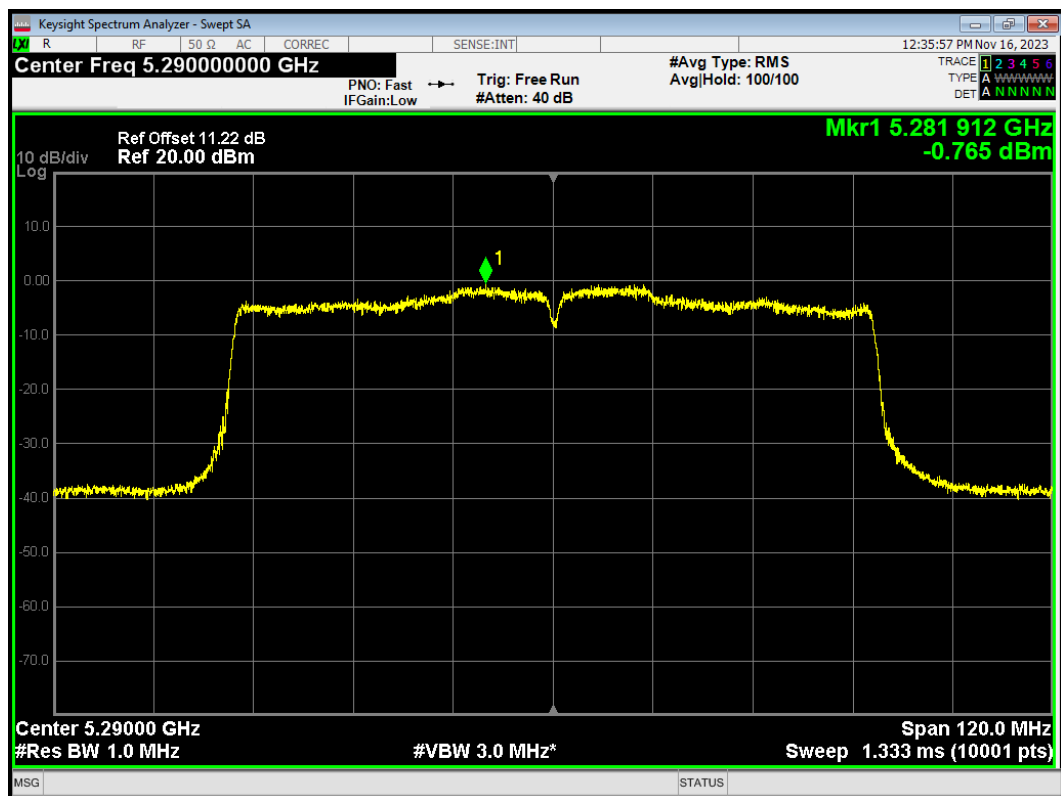


PSD 802.11ax(HE20) 5260MHz

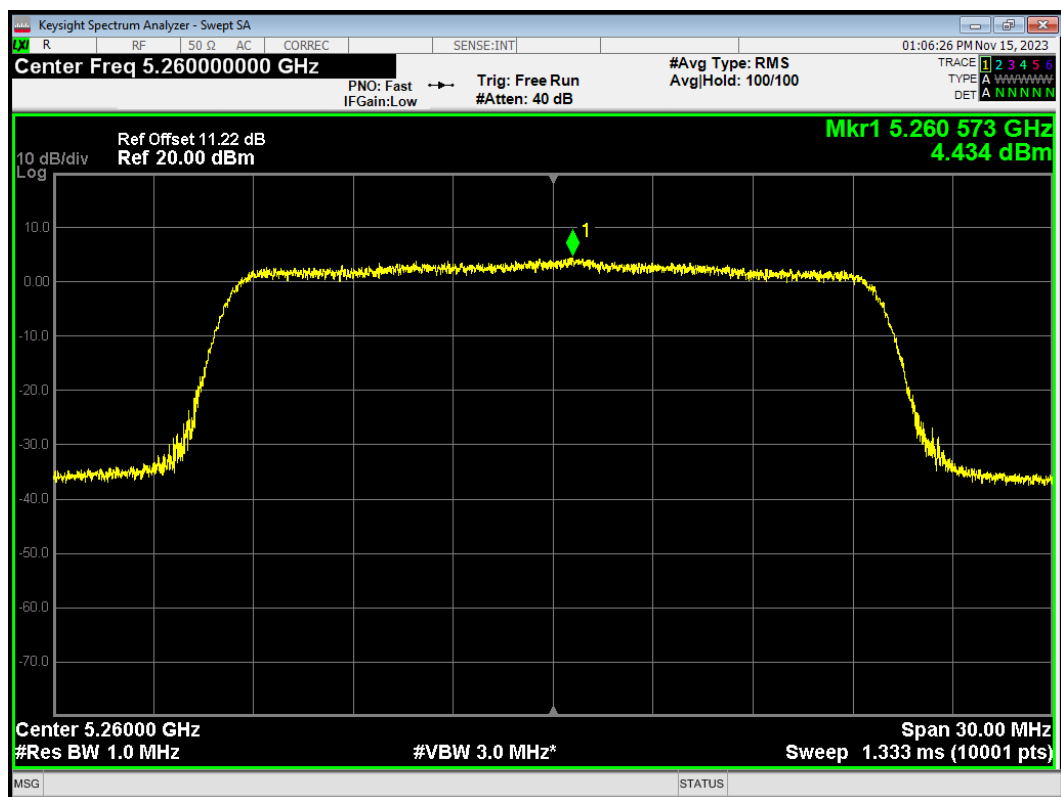


PSD 802.11ax(HE20) 5300MHz

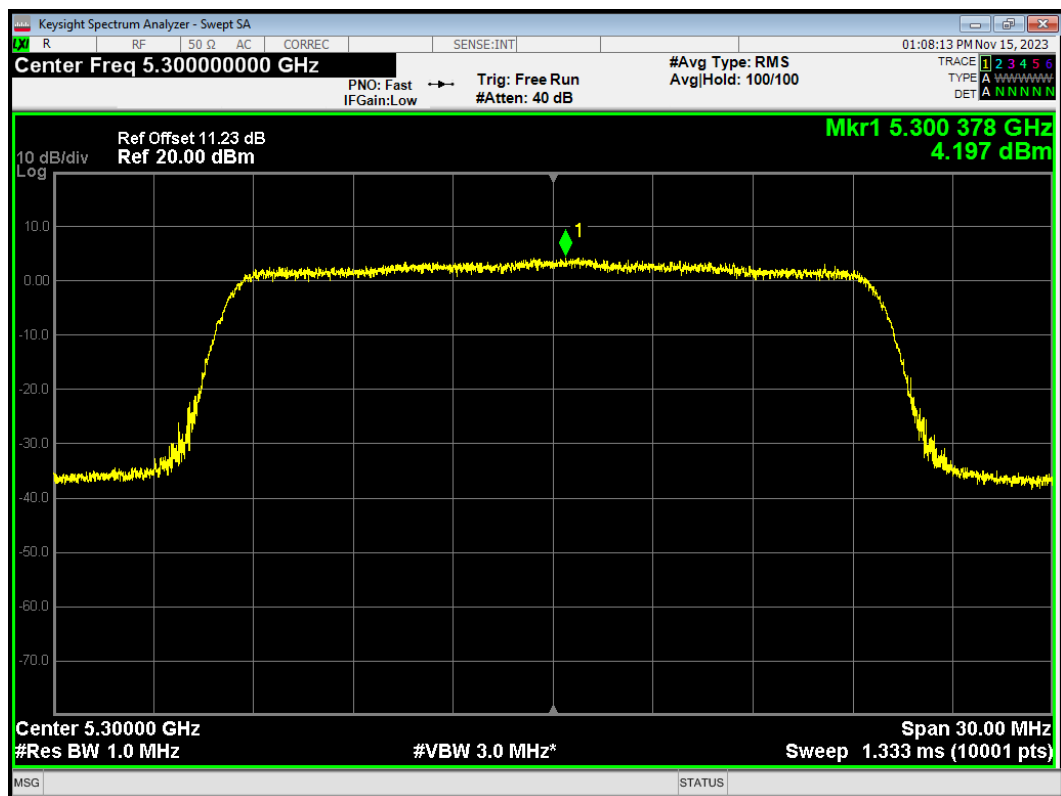


PSD 802.11ax(HE20) 5320MHz

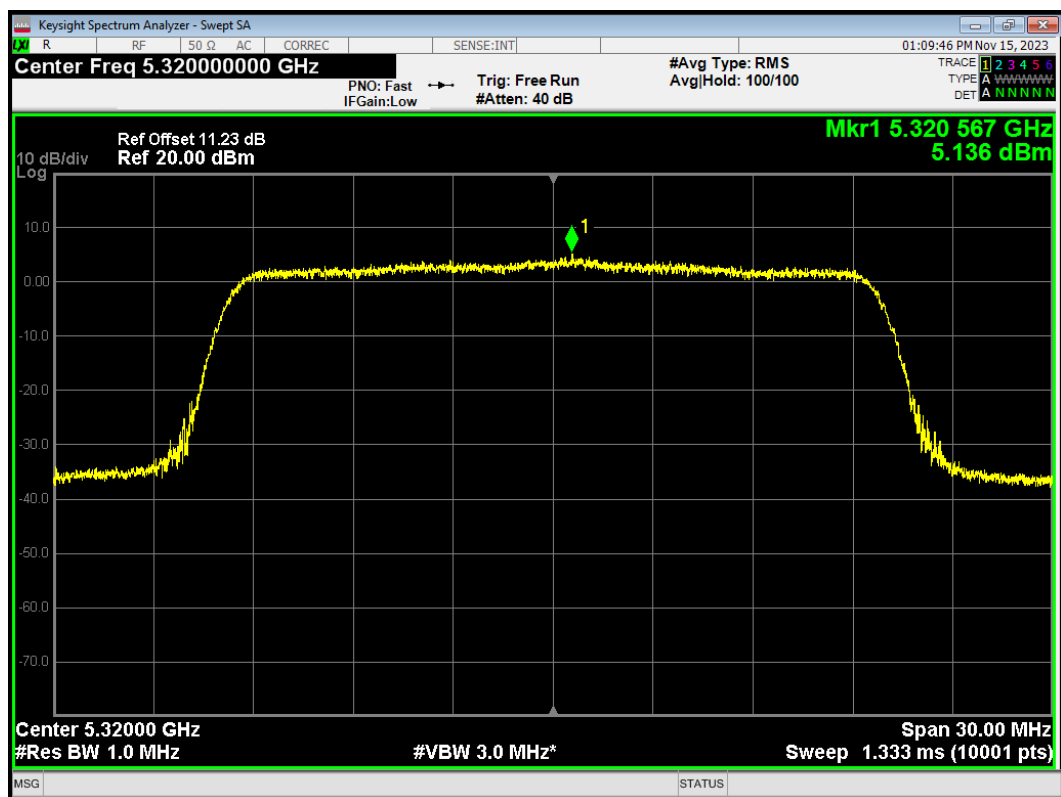


PSD 802.11ax(HE40) 5270MHz

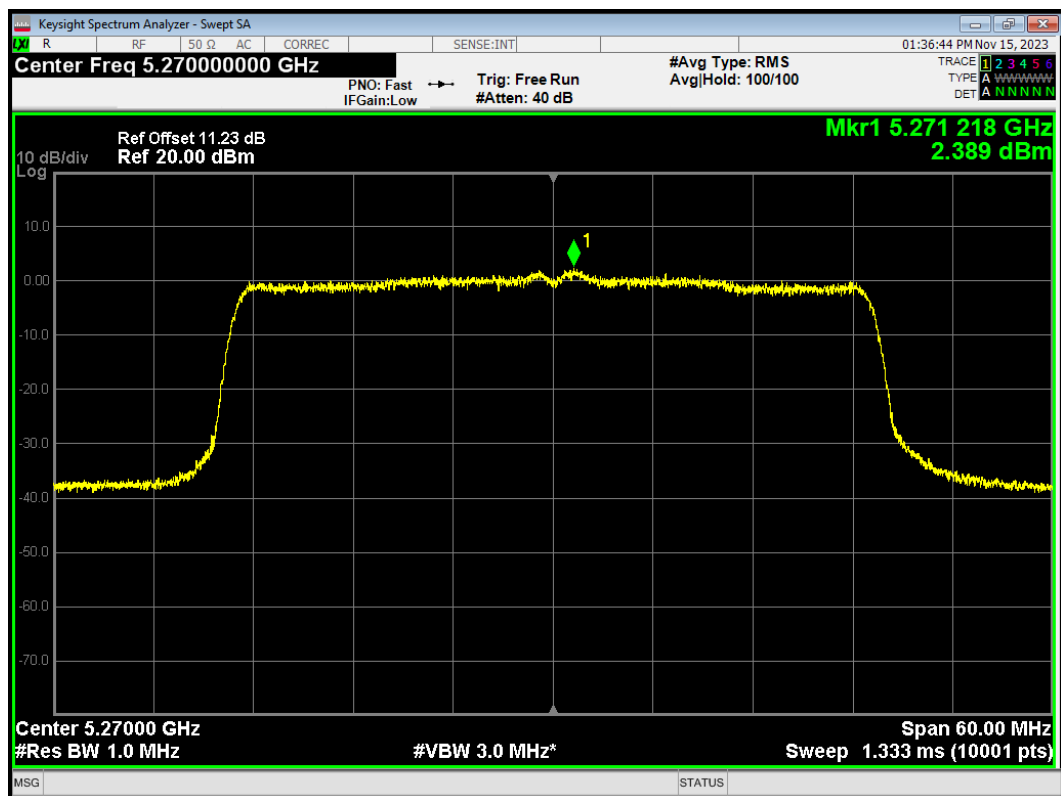


PSD 802.11ax(HE40) 5310MHz

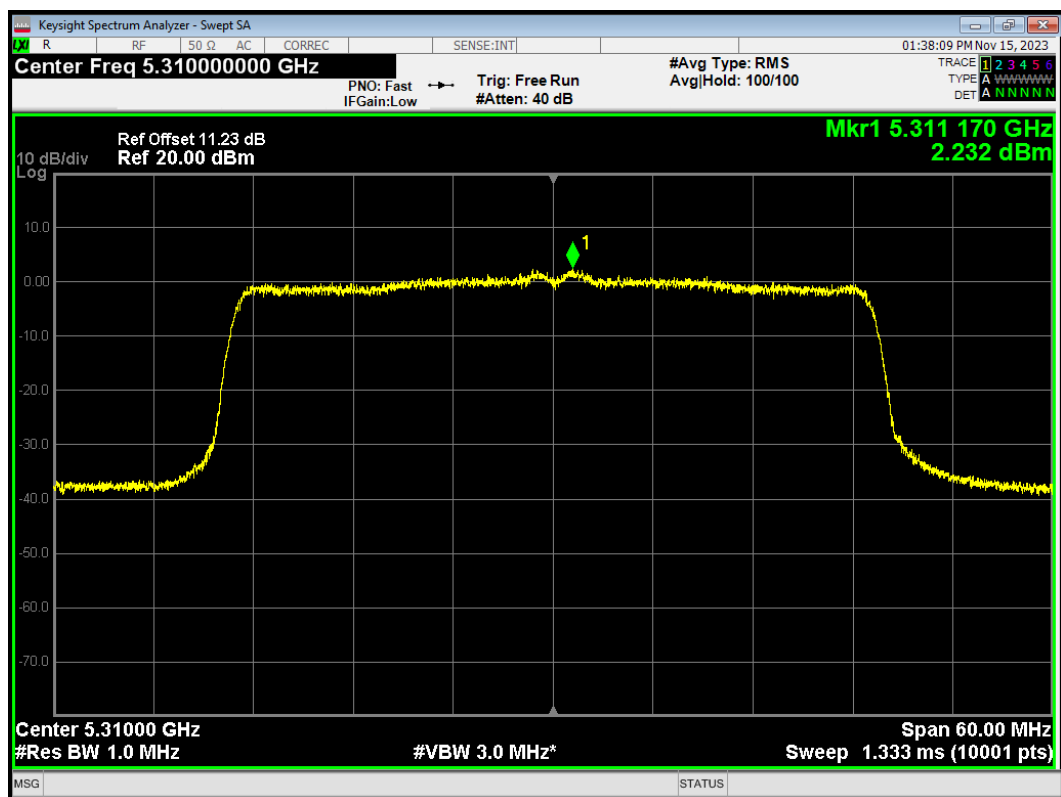


PSD 802.11ax(HE80) 5290MHz

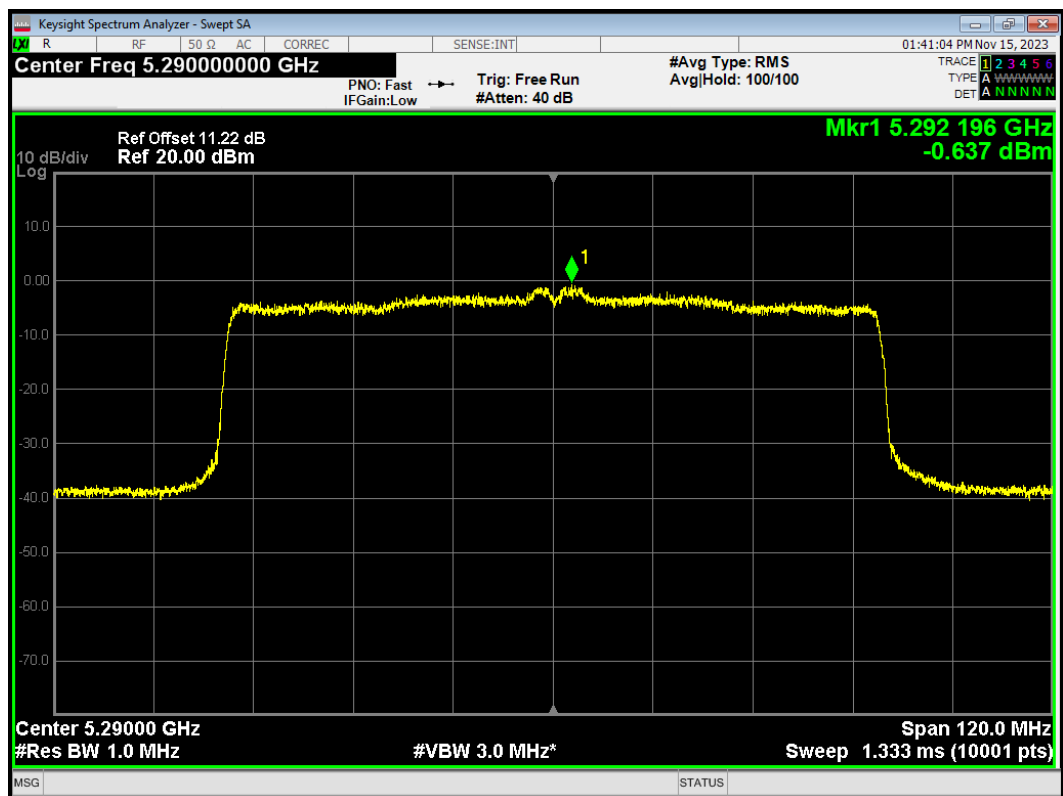


PSD 802.11n(HT20) 5260MHz

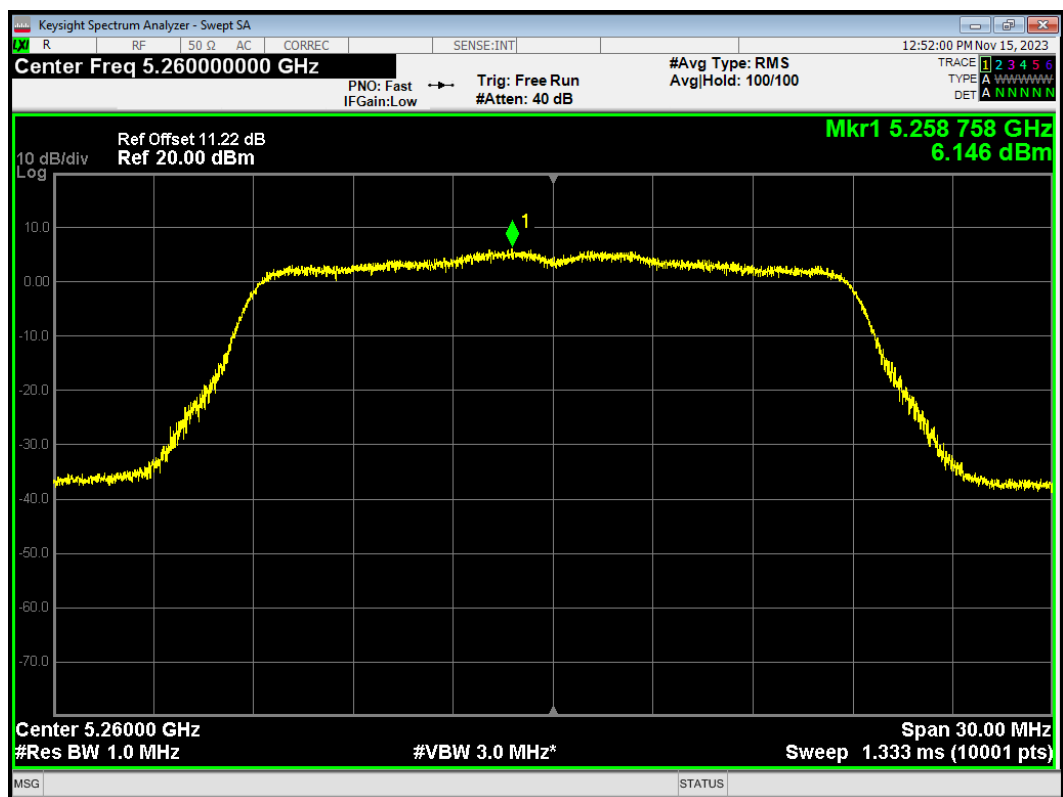


PSD 802.11n(HT20) 5300MHz

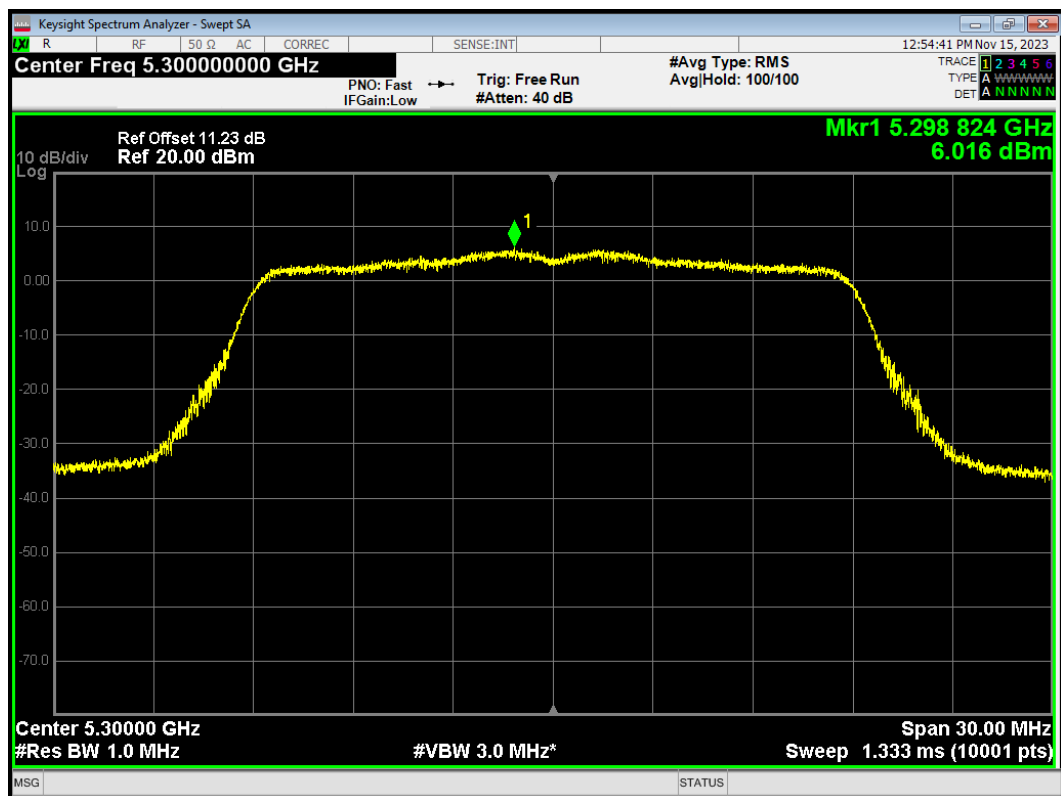


PSD 802.11n(HT20) 5320MHz

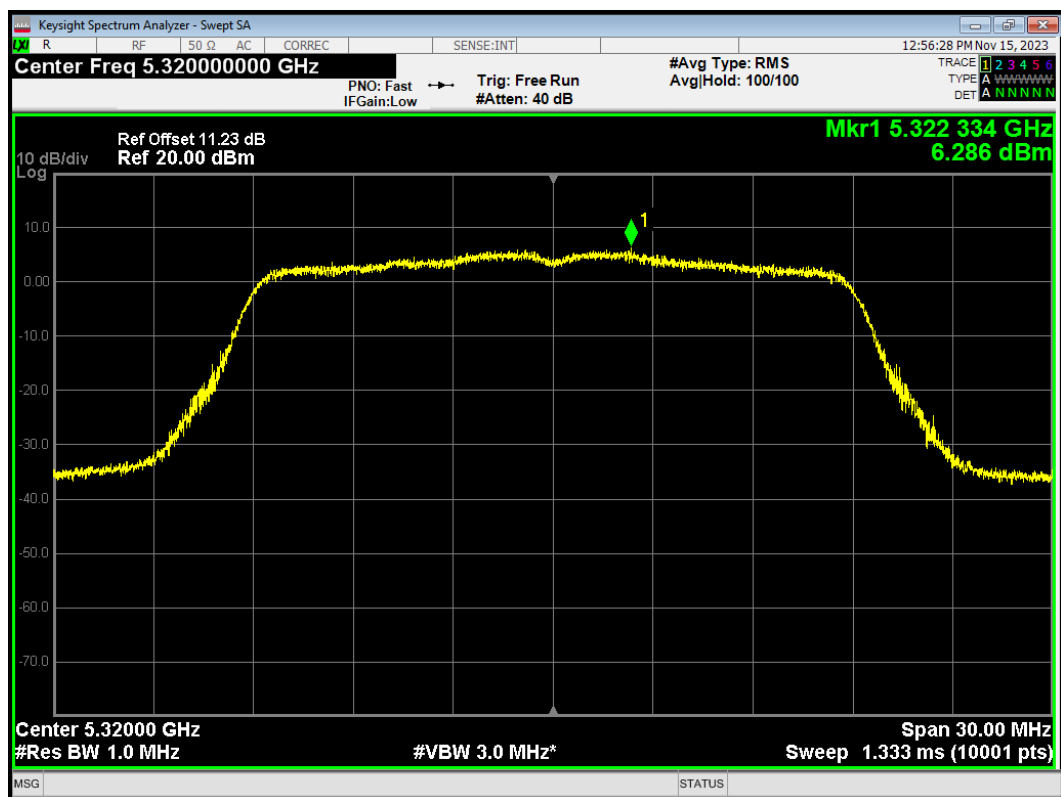

PSD 802.11n(HT40) 5270MHz

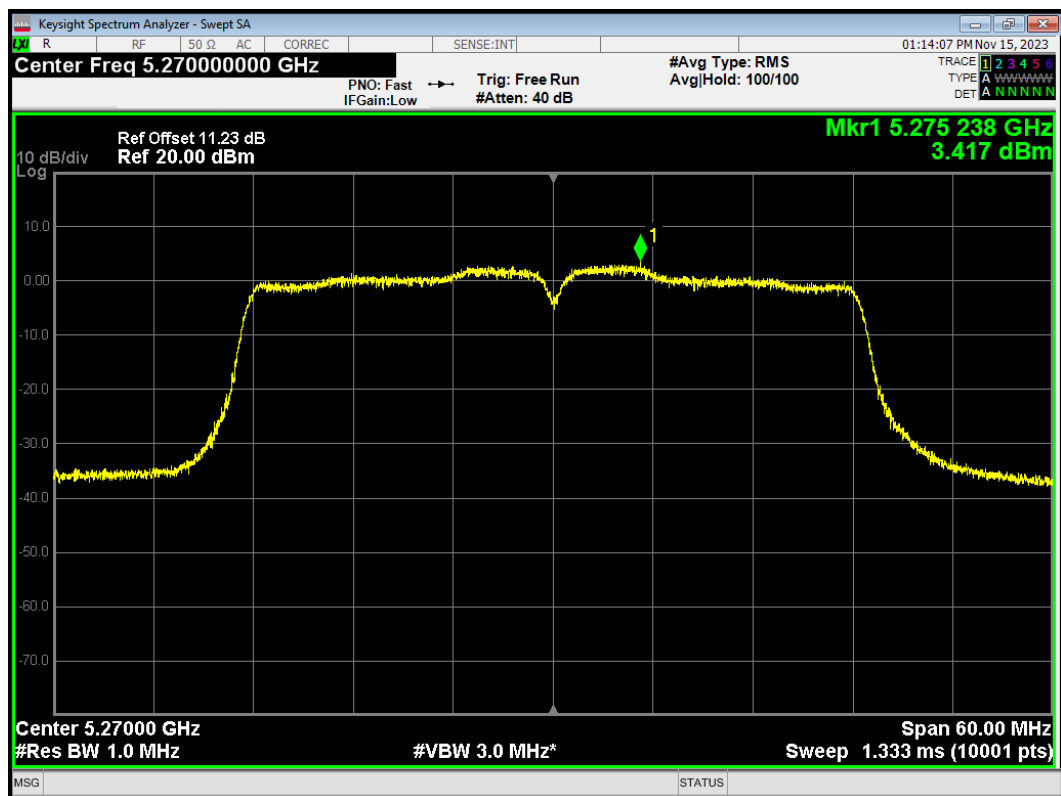


PSD 802.11n(HT40) 5310MHz

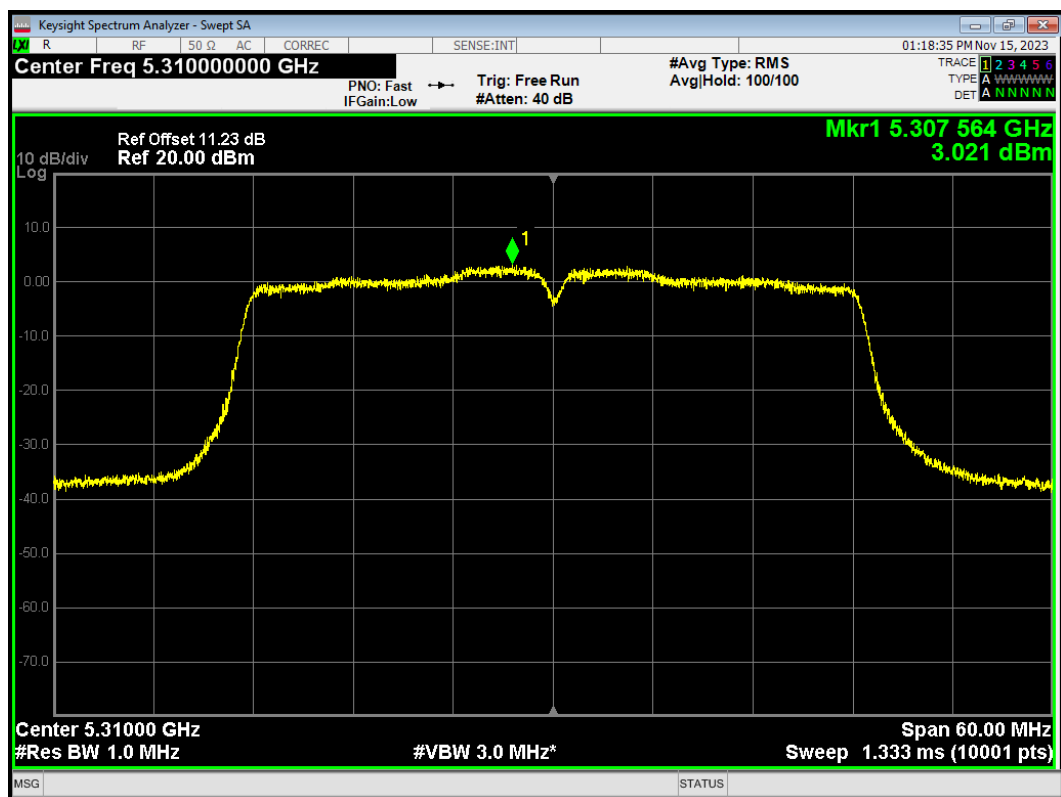


U-NII-2C


PSD 802.11a 5500MHz

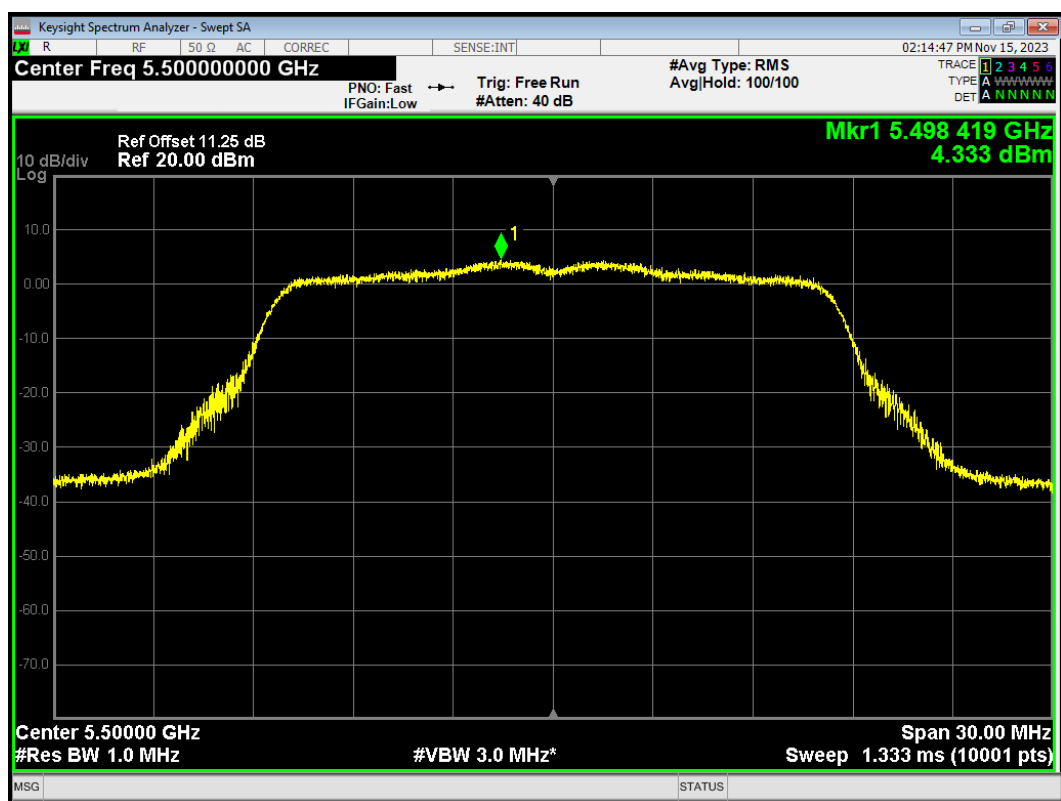


PSD 802.11a 5580MHz

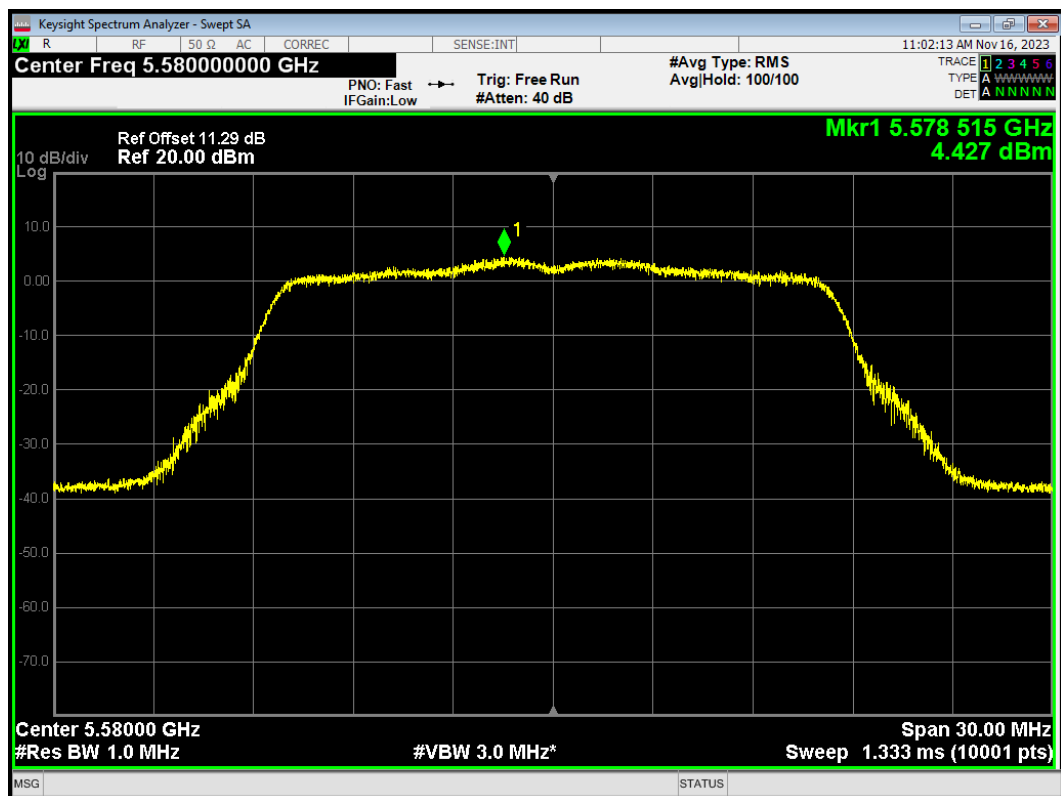


PSD 802.11a 5700MHz

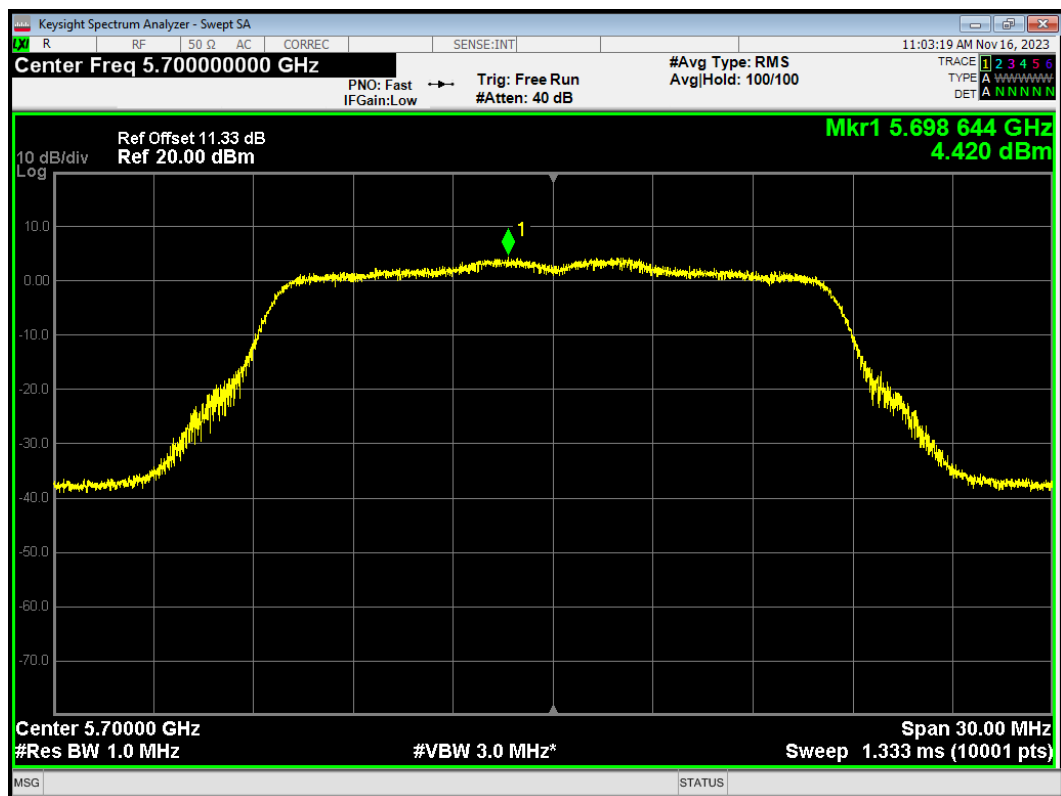


PSD 802.11a 5720MHz

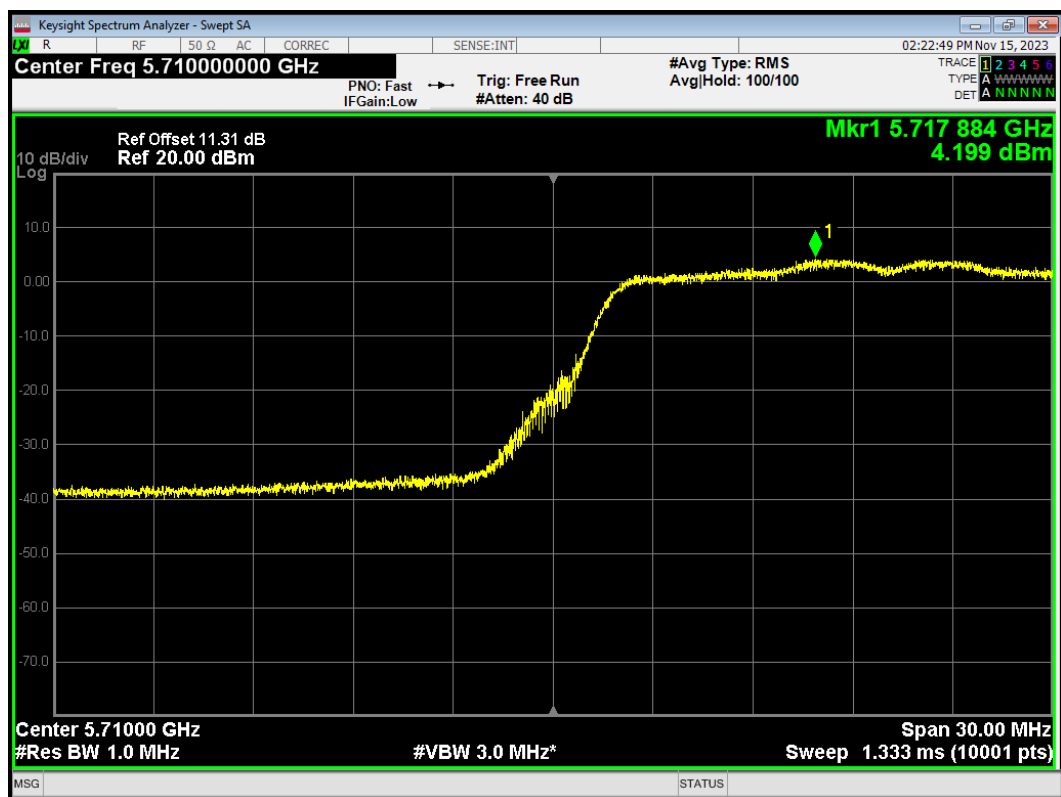


PSD 802.11ac(VHT20) 5500MHz

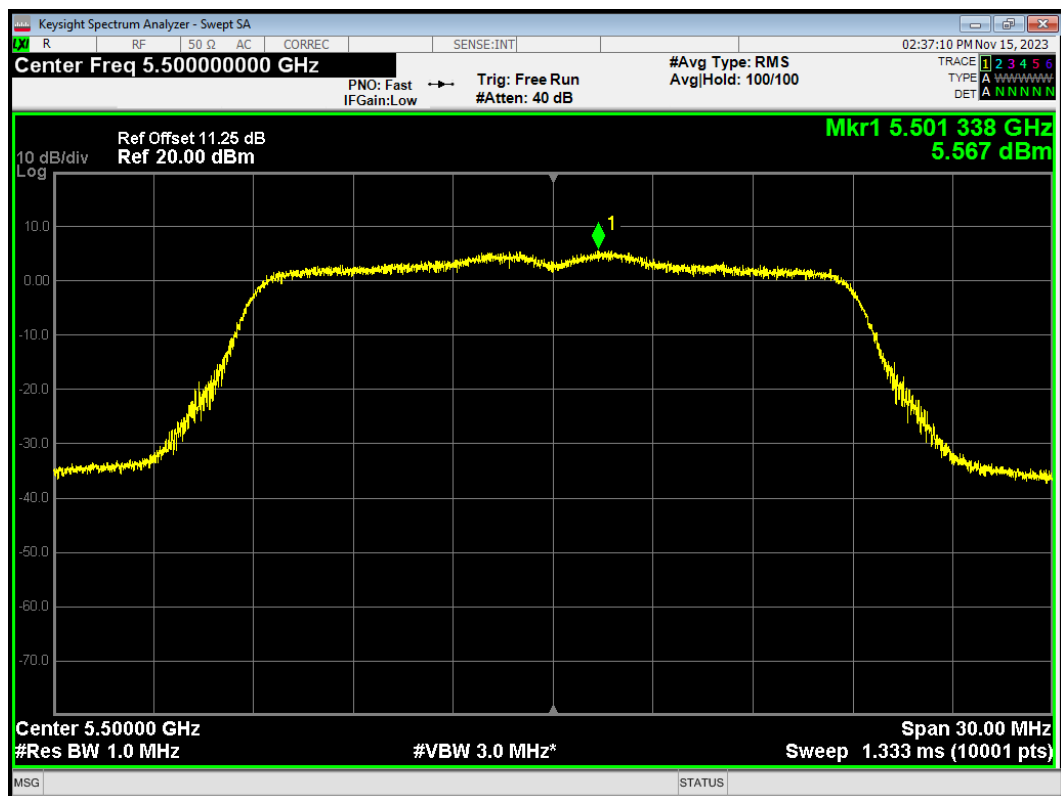


PSD 802.11ac(VHT20) 5580MHz

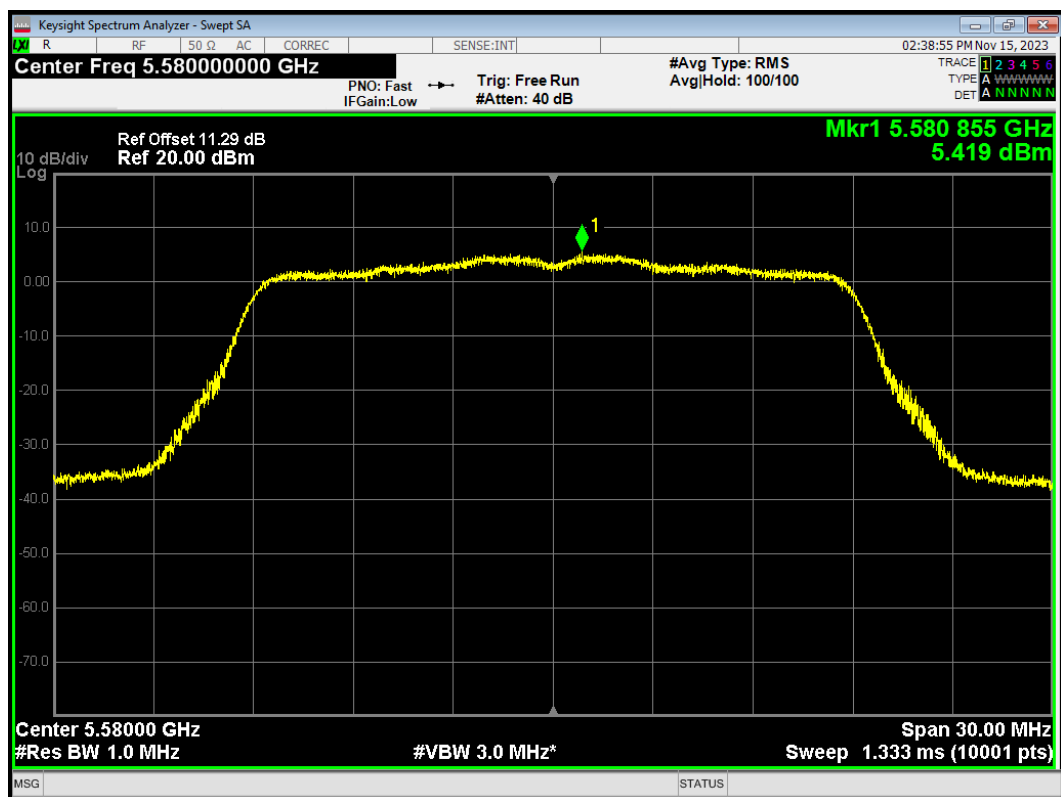


PSD 802.11ac(VHT20) 5700MHz

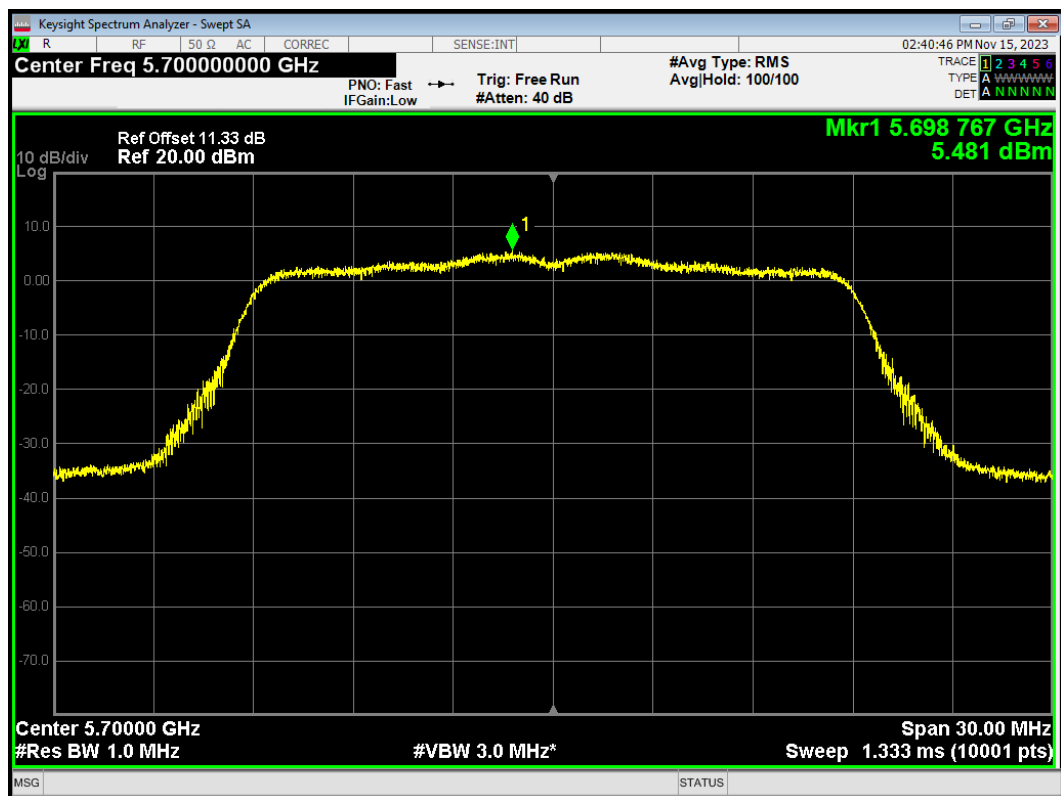


PSD 802.11ac(VHT20) 5720MHz

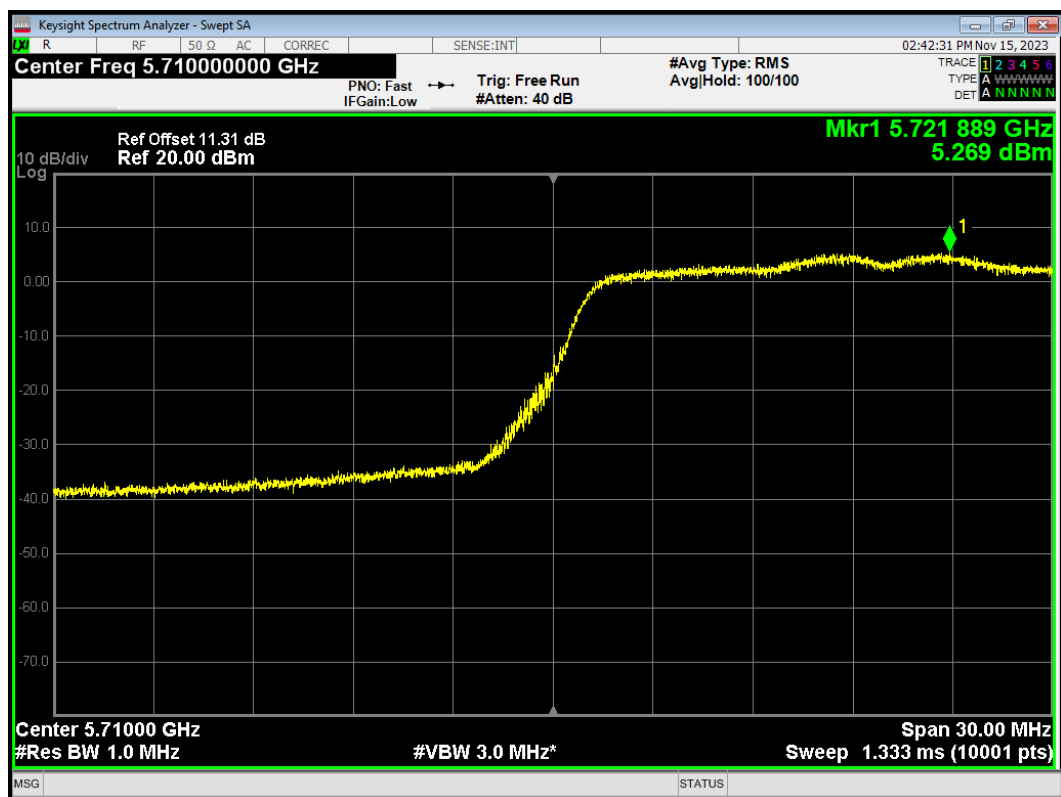


PSD 802.11ac(VHT40) 5510MHz

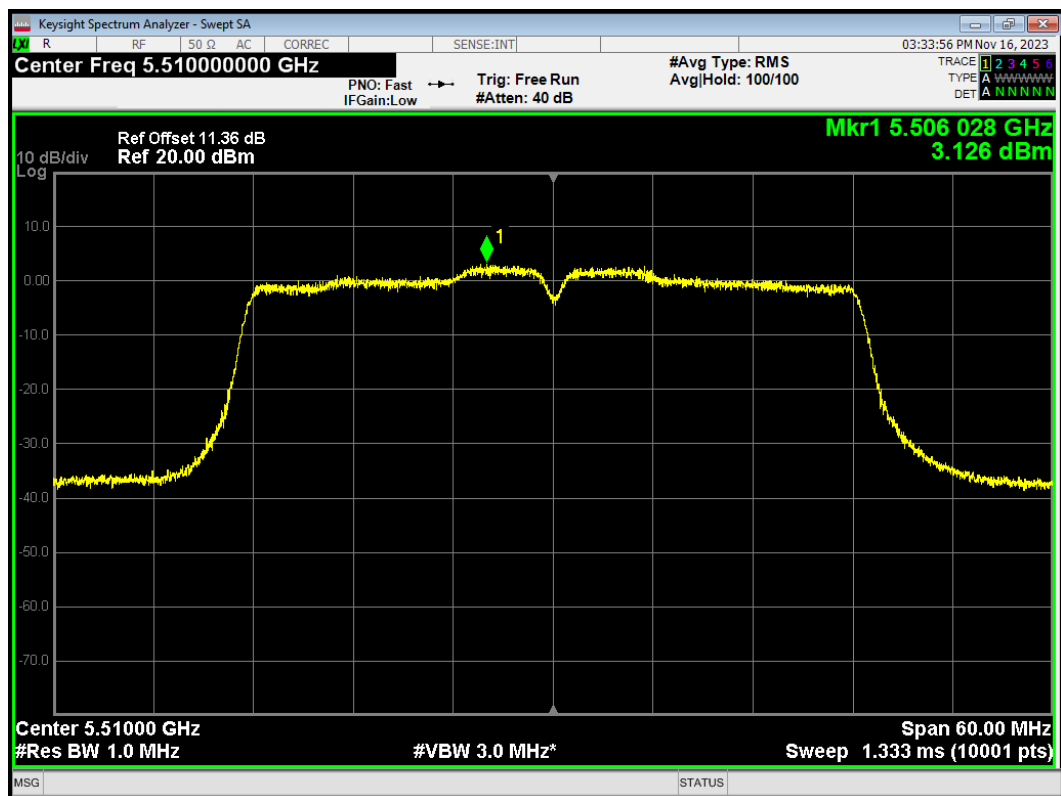


PSD 802.11ac(VHT40) 5550MHz

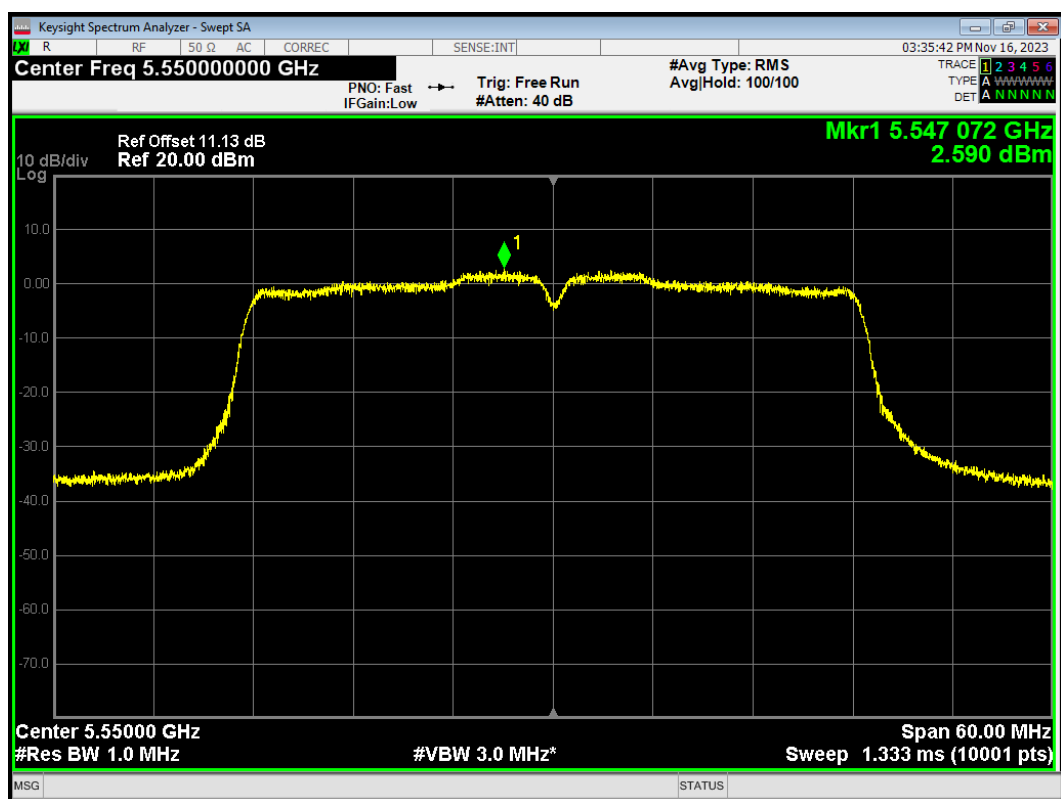


PSD 802.11ac(VHT40) 5670MHz

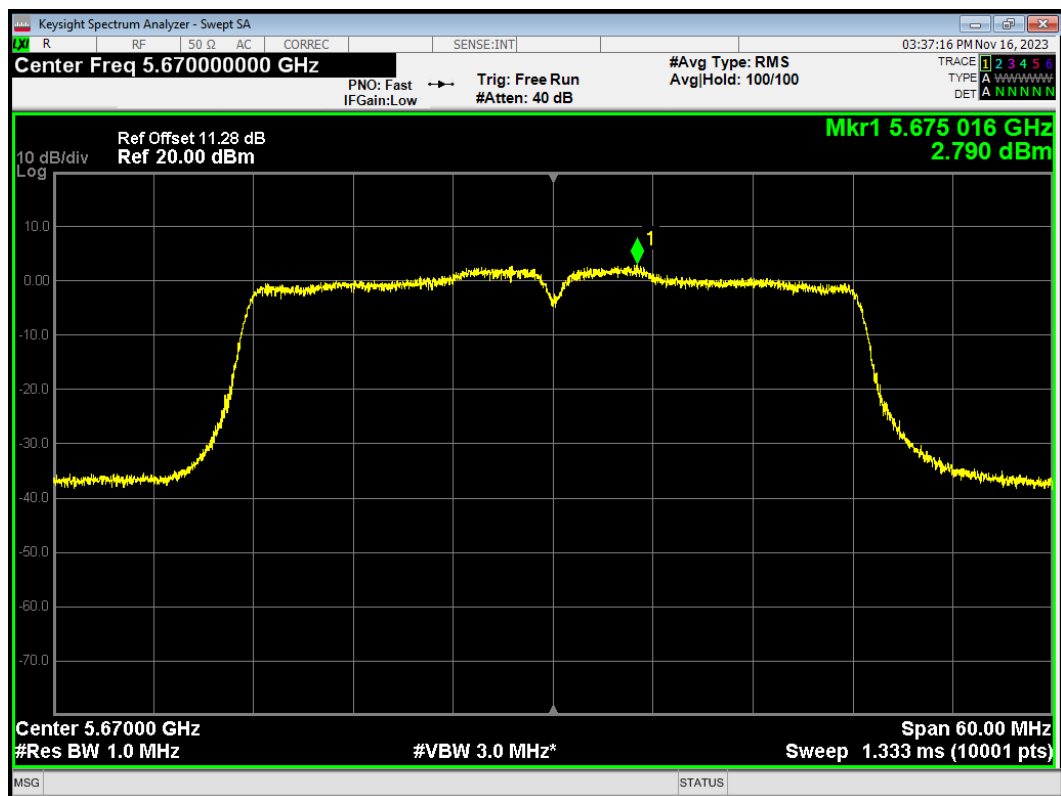


PSD 802.11ac(VHT40) 5710MHz

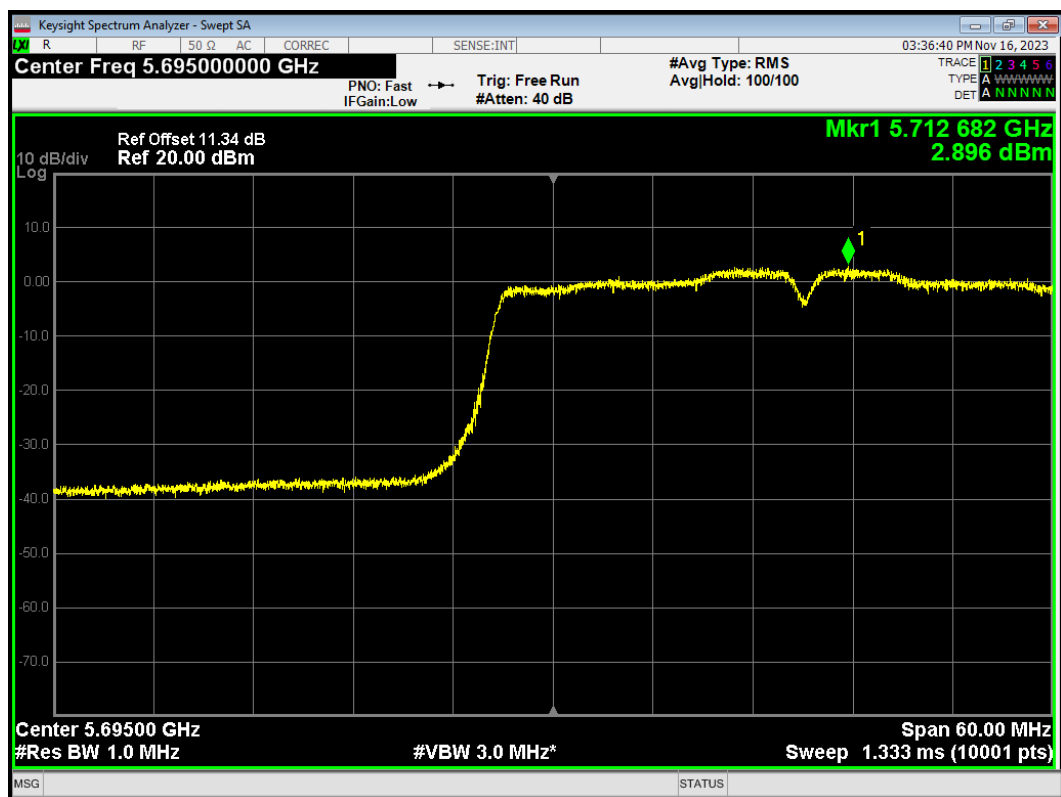


PSD 802.11ac(VHT80) 5530MHz

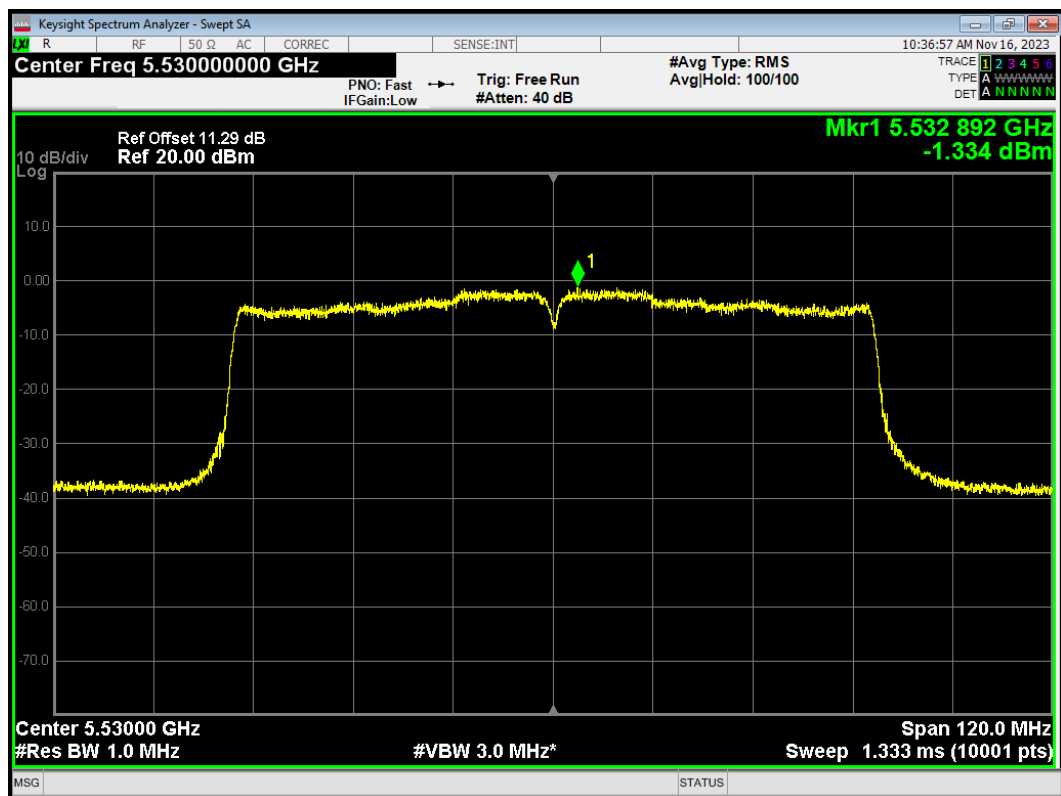


PSD 802.11ac(VHT80) 5690MHz

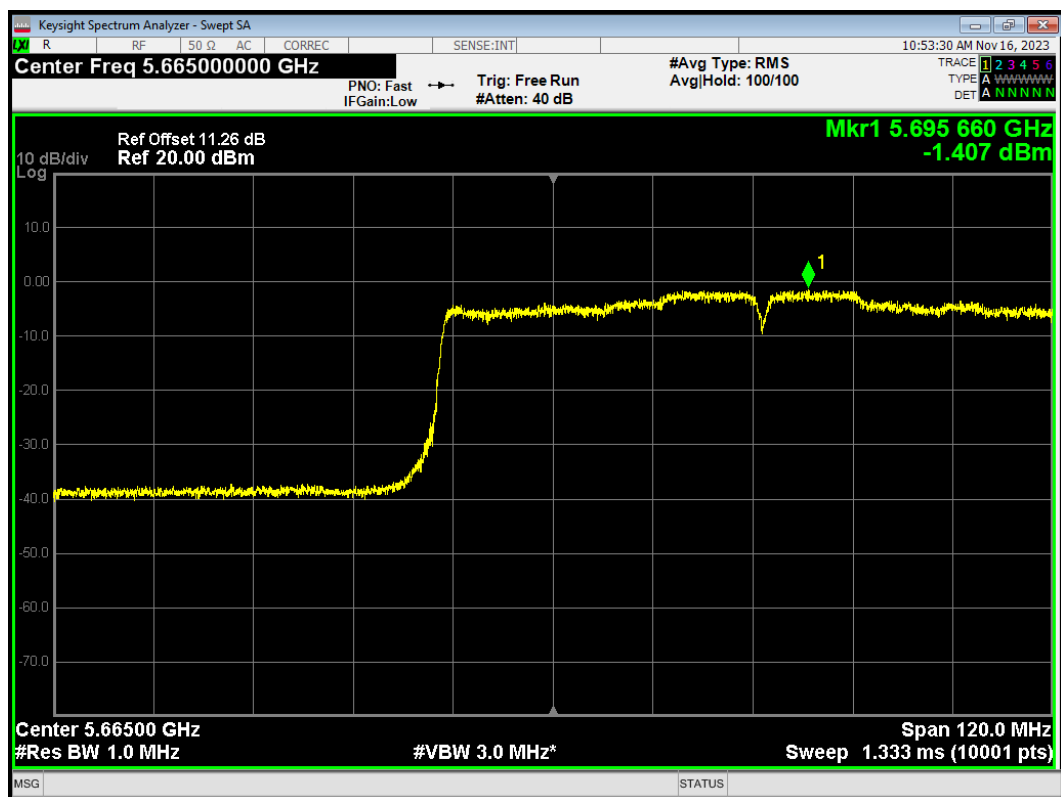


PSD 802.11ax(HE20) 5500MHz

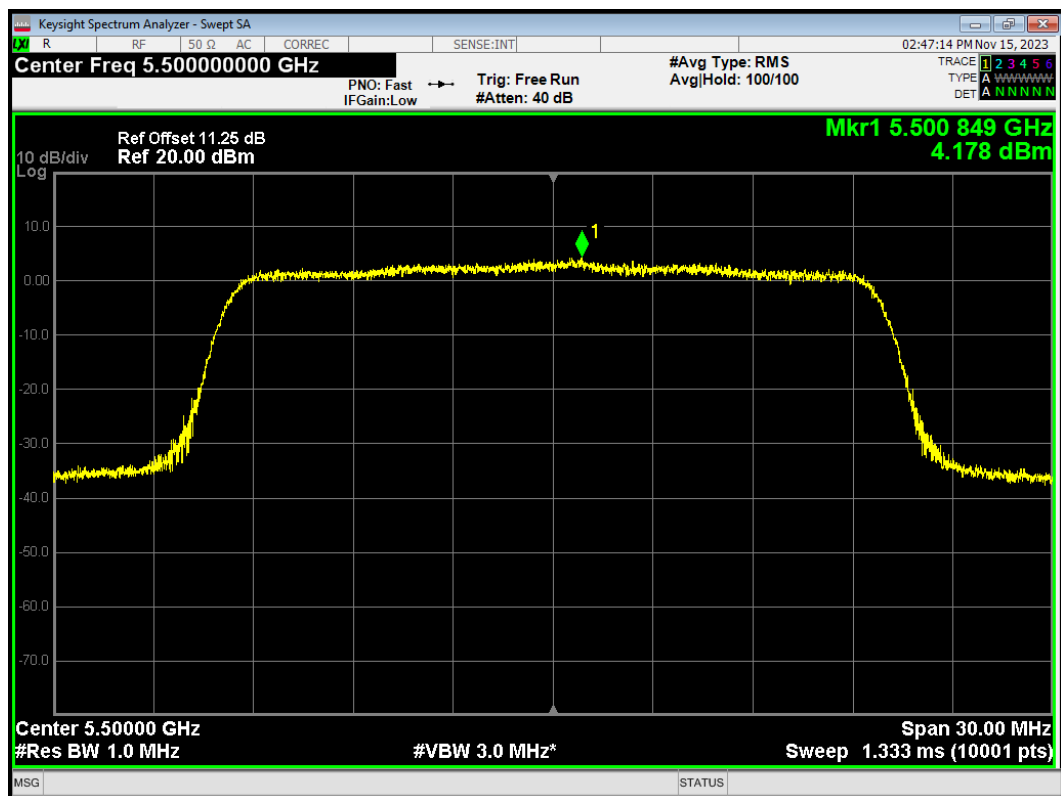


PSD 802.11ax(HE20) 5580MHz

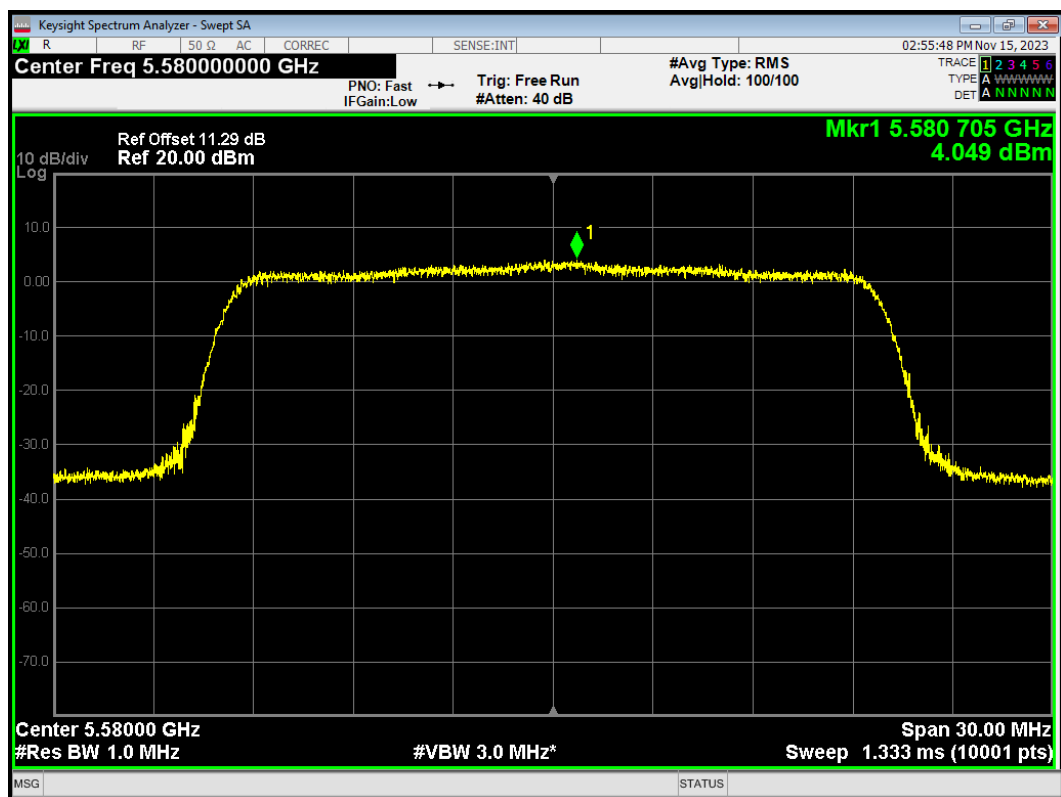


PSD 802.11ax(HE20) 5700MHz

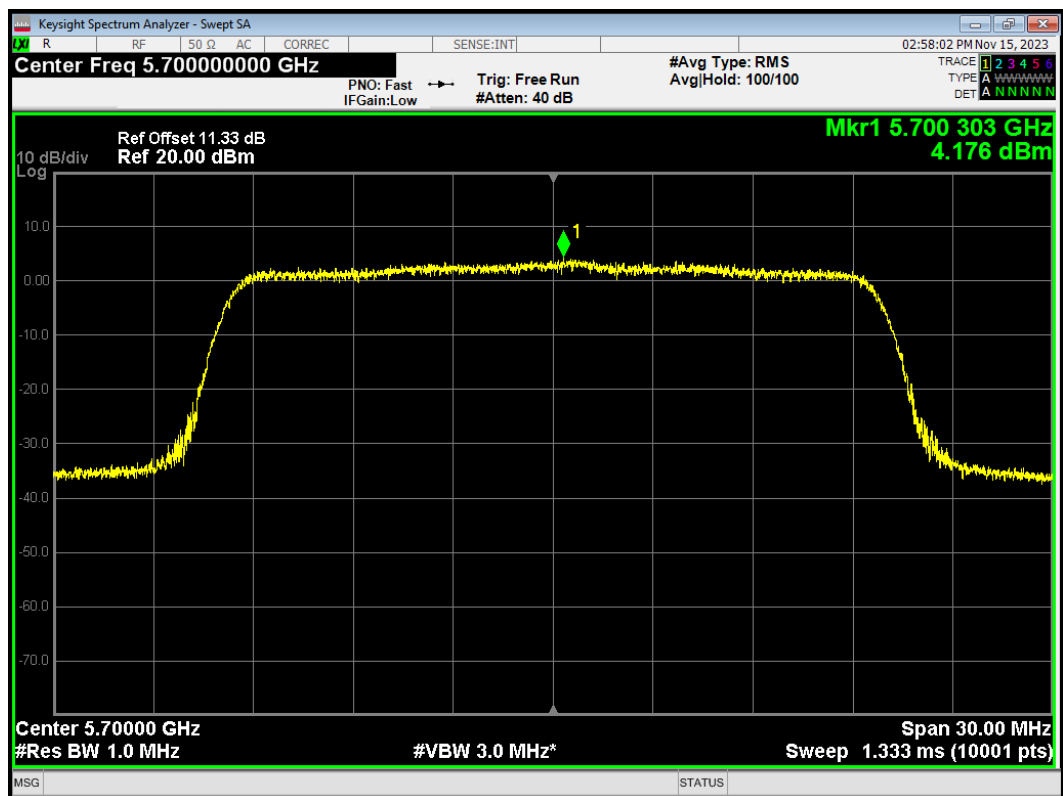


PSD 802.11ax(HE20) 5720MHz

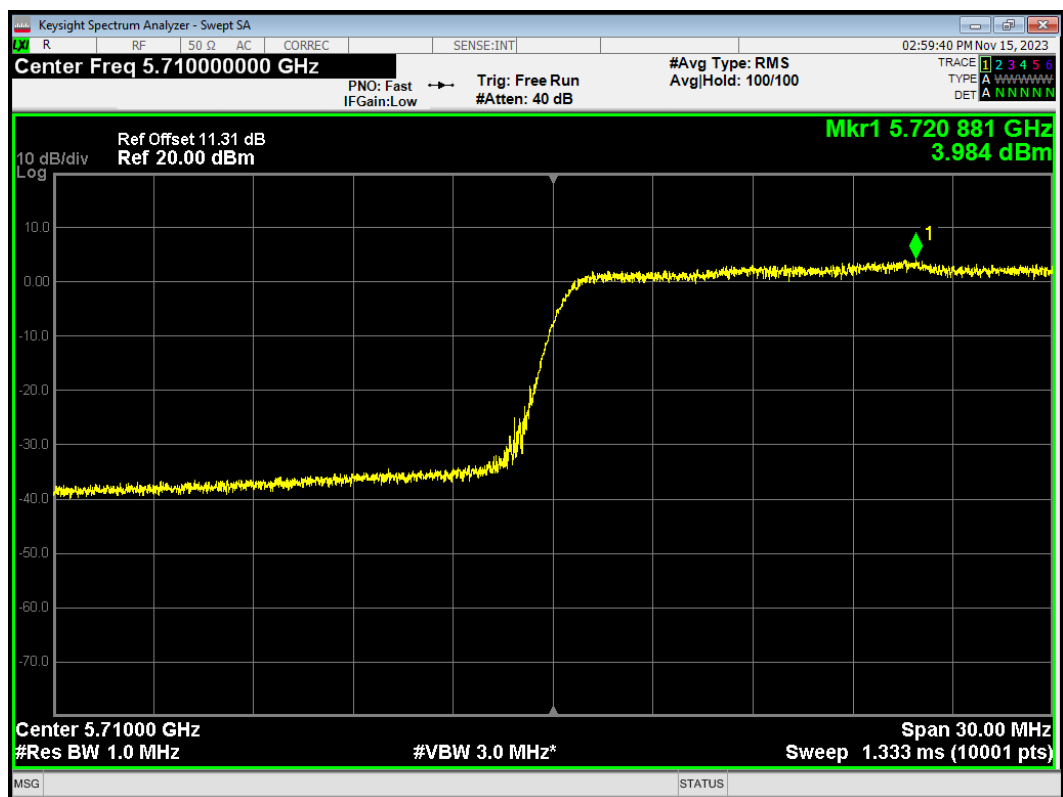


PSD 802.11ax(HE40) 5510MHz

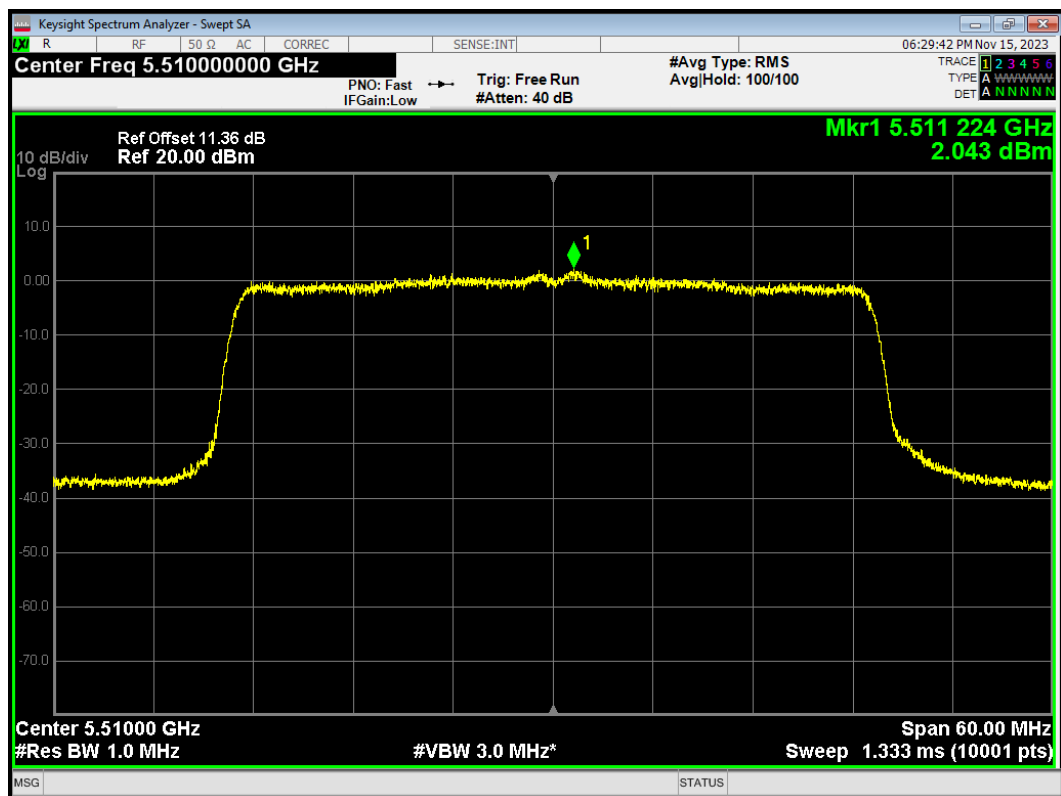


PSD 802.11ax(HE40) 5550MHz

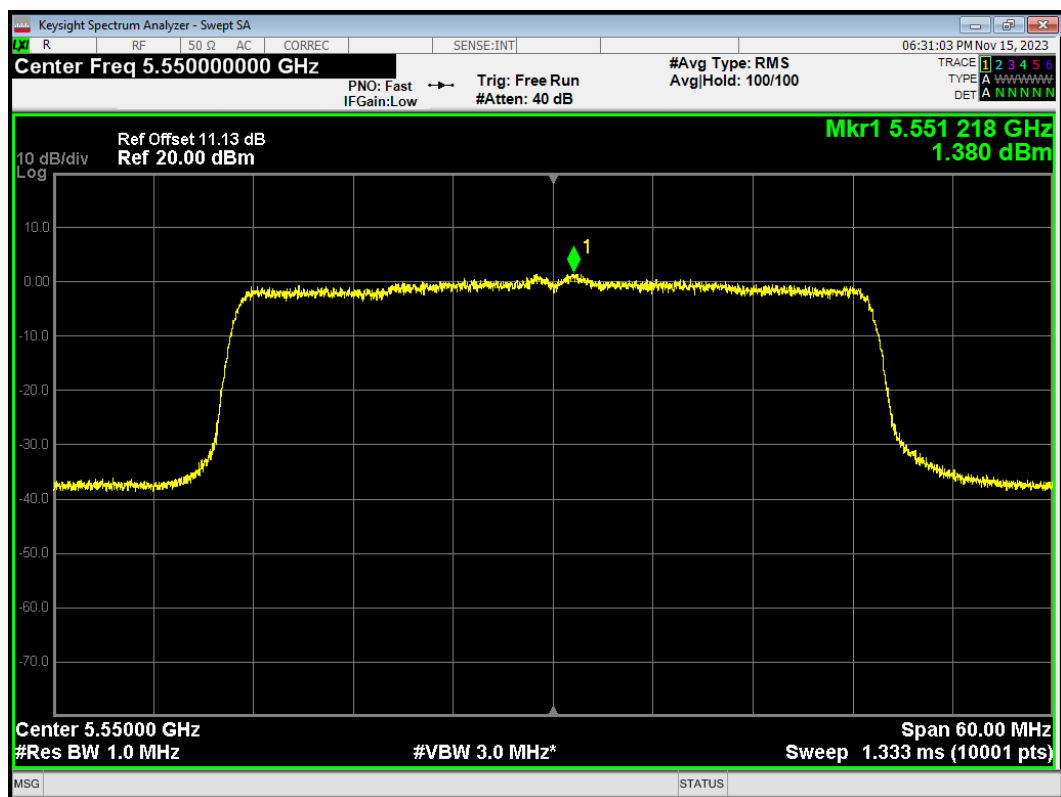


PSD 802.11ax(HE40) 5670MHz

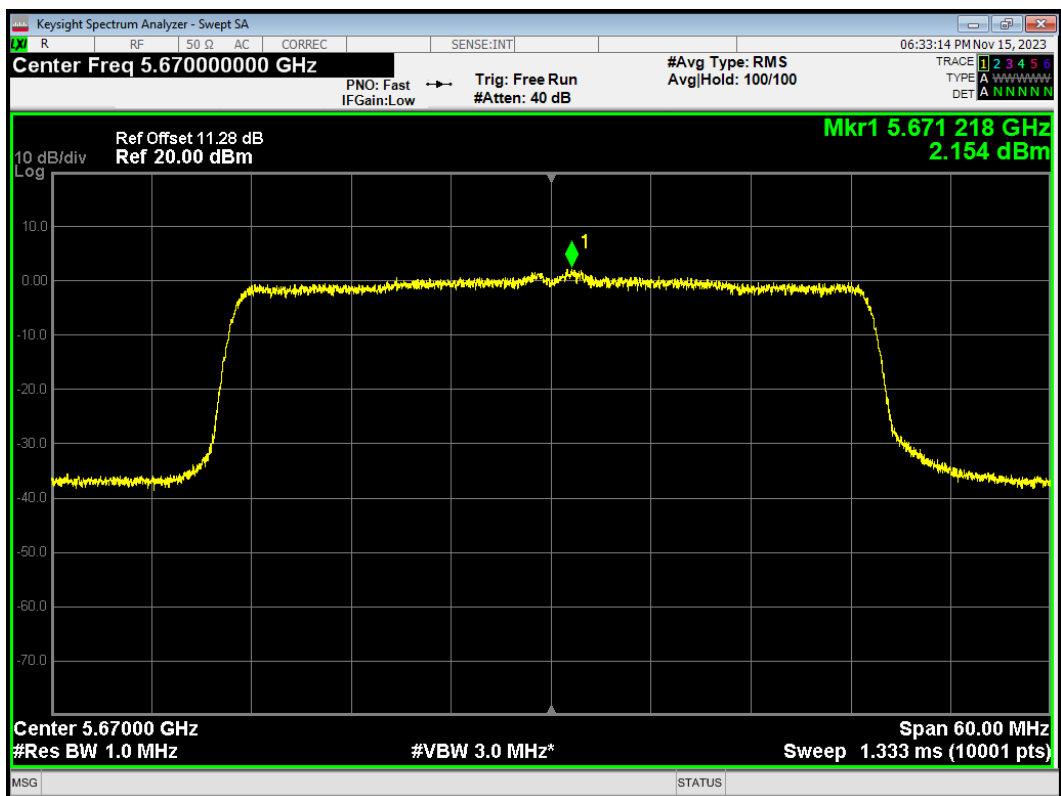


PSD 802.11ax(HE40) 5710MHz

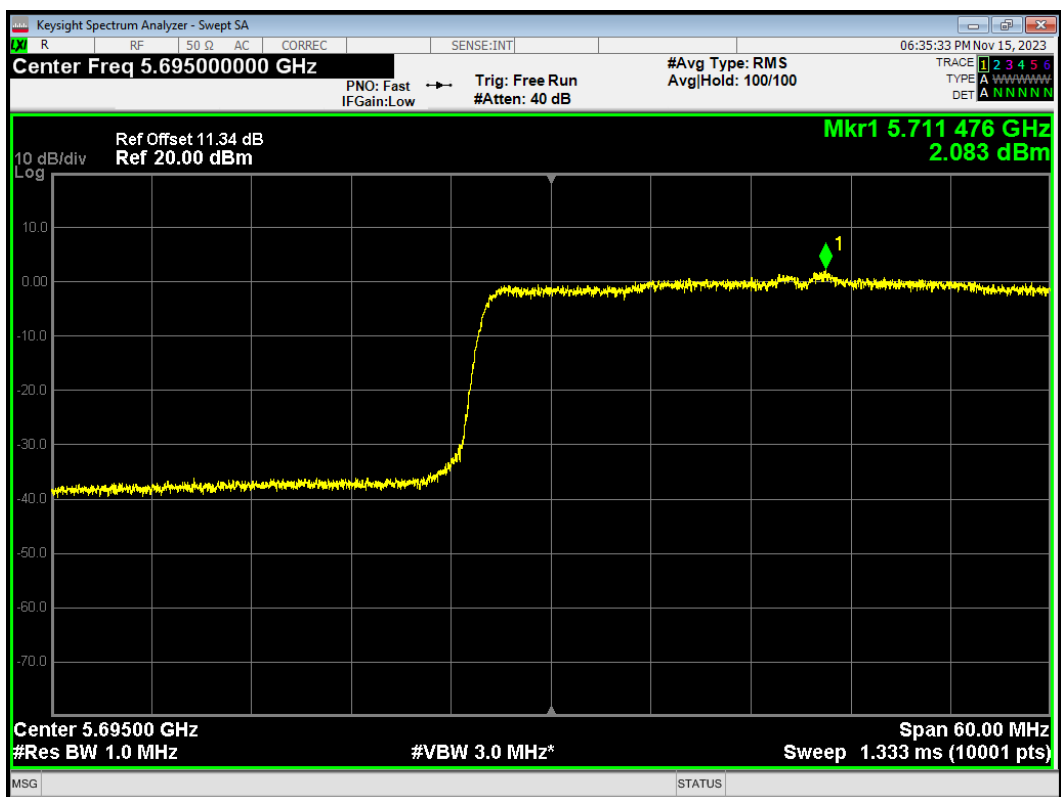


PSD 802.11ax(HE80) 5530MHz

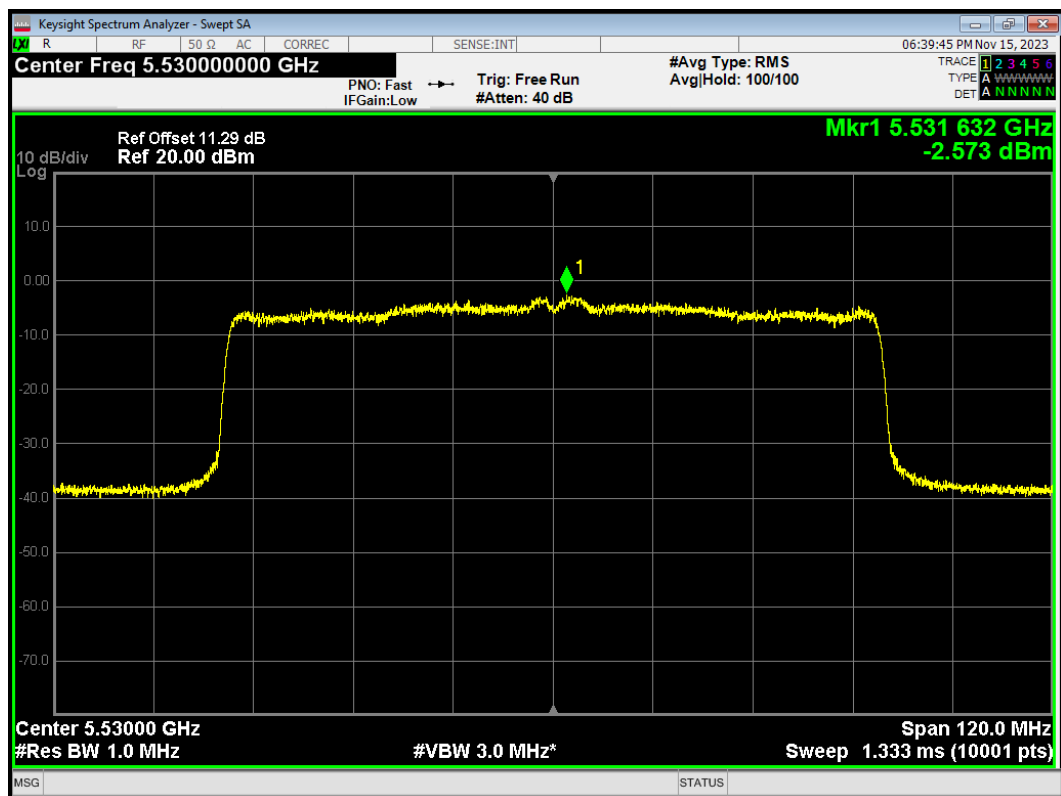


PSD 802.11ax(HE80) 5690MHz

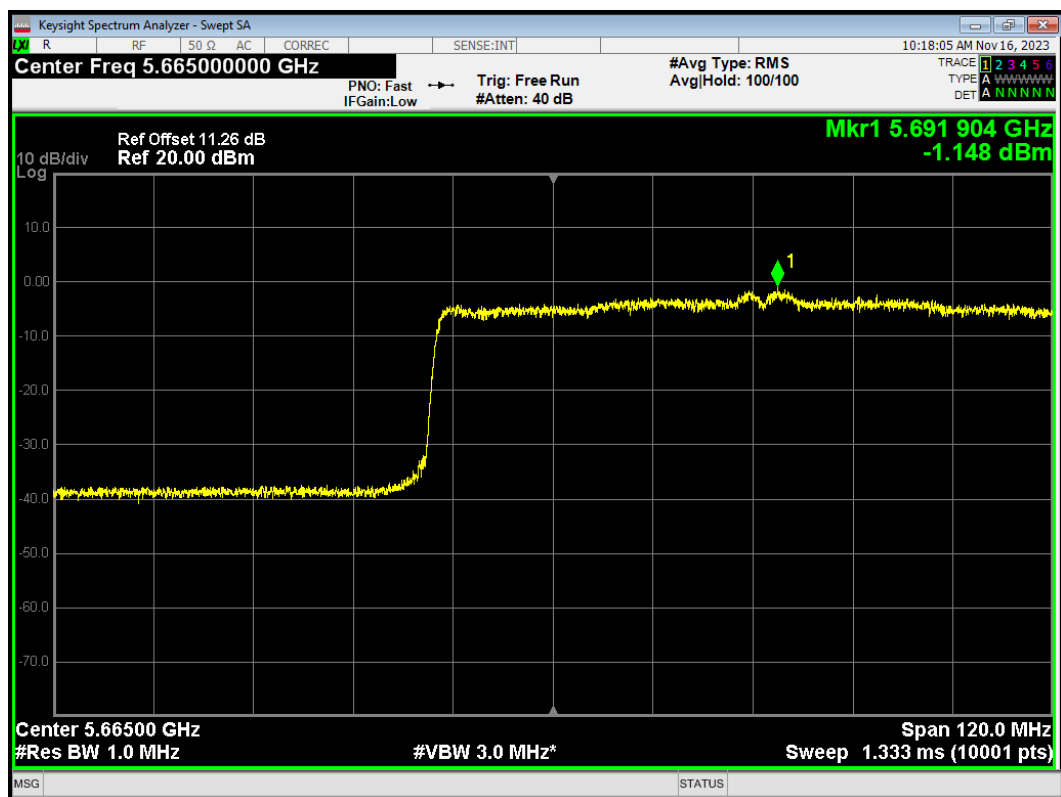


PSD 802.11n(HT20) 5500MHz

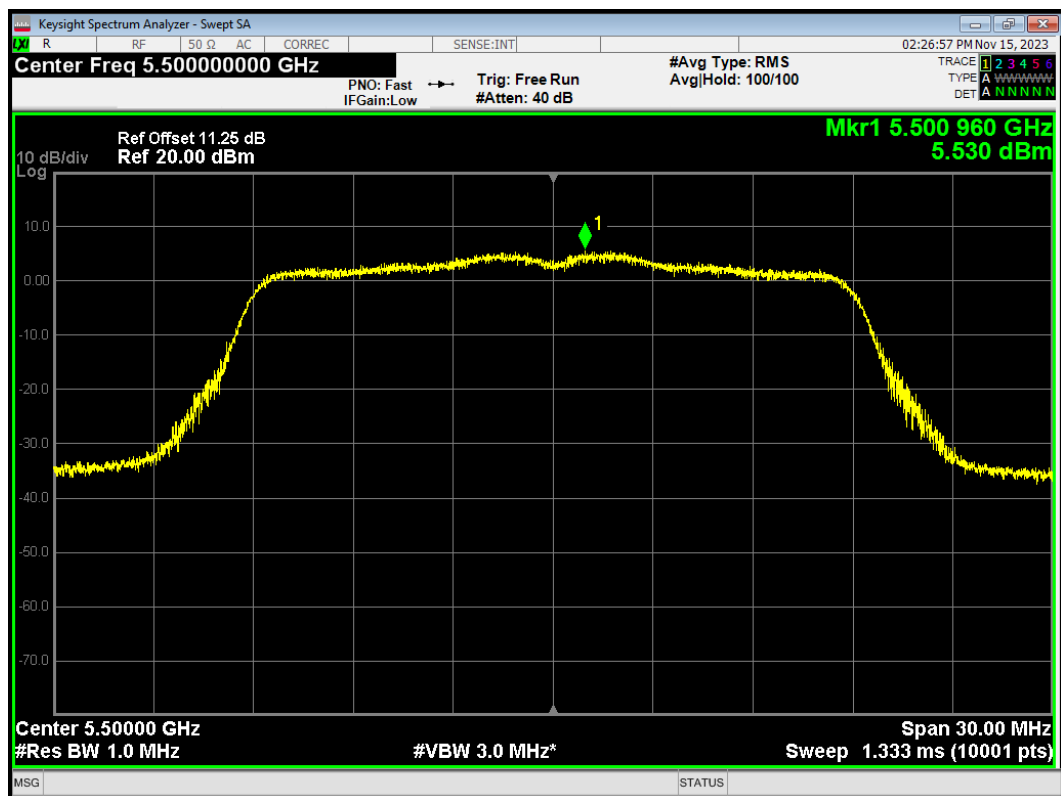


PSD 802.11n(HT20) 5580MHz

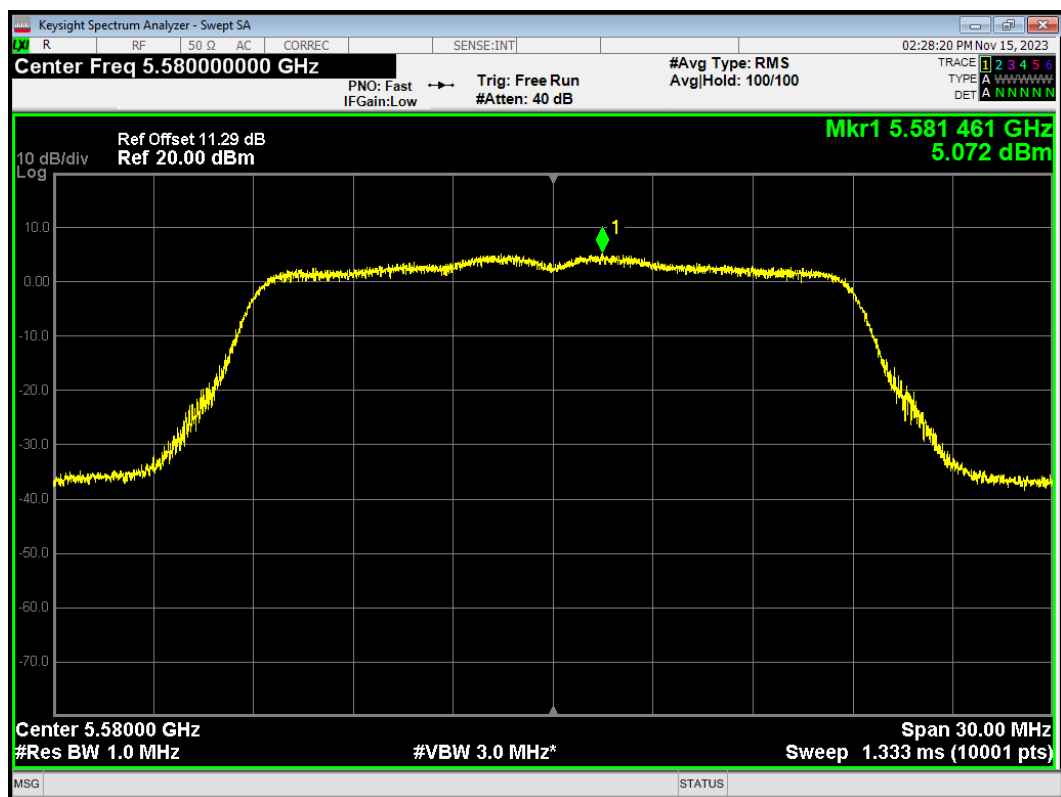


PSD 802.11n(HT20) 5700MHz

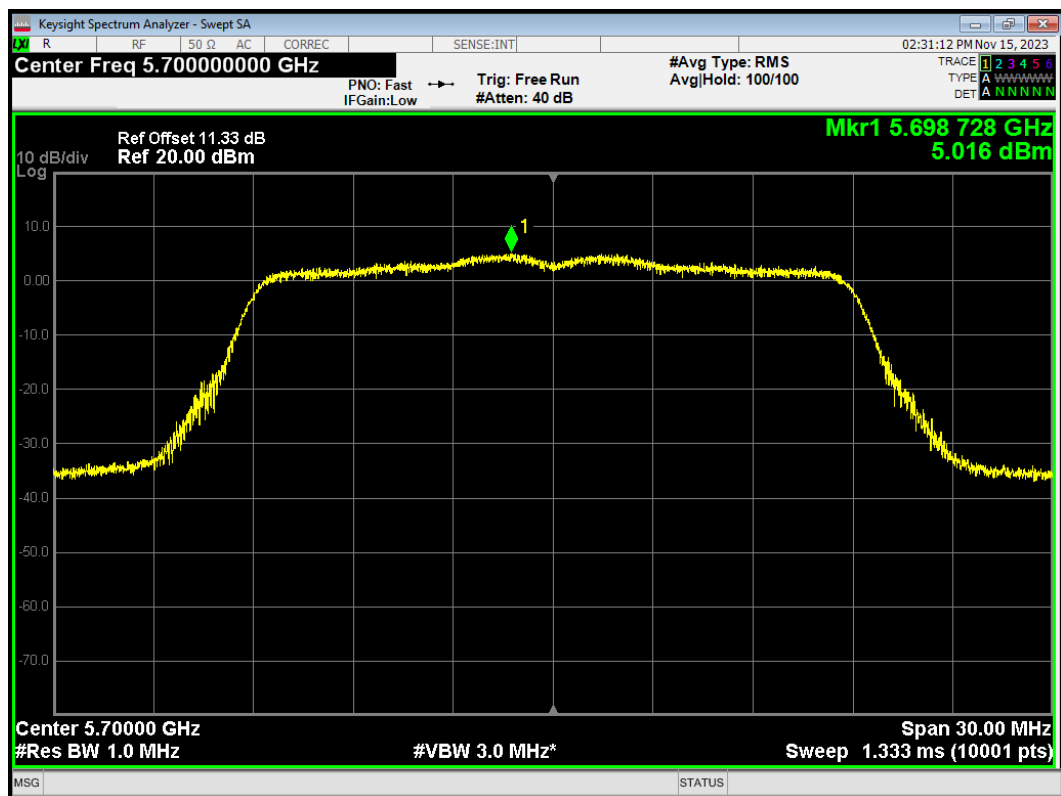


PSD 802.11n(HT20) 5720MHz

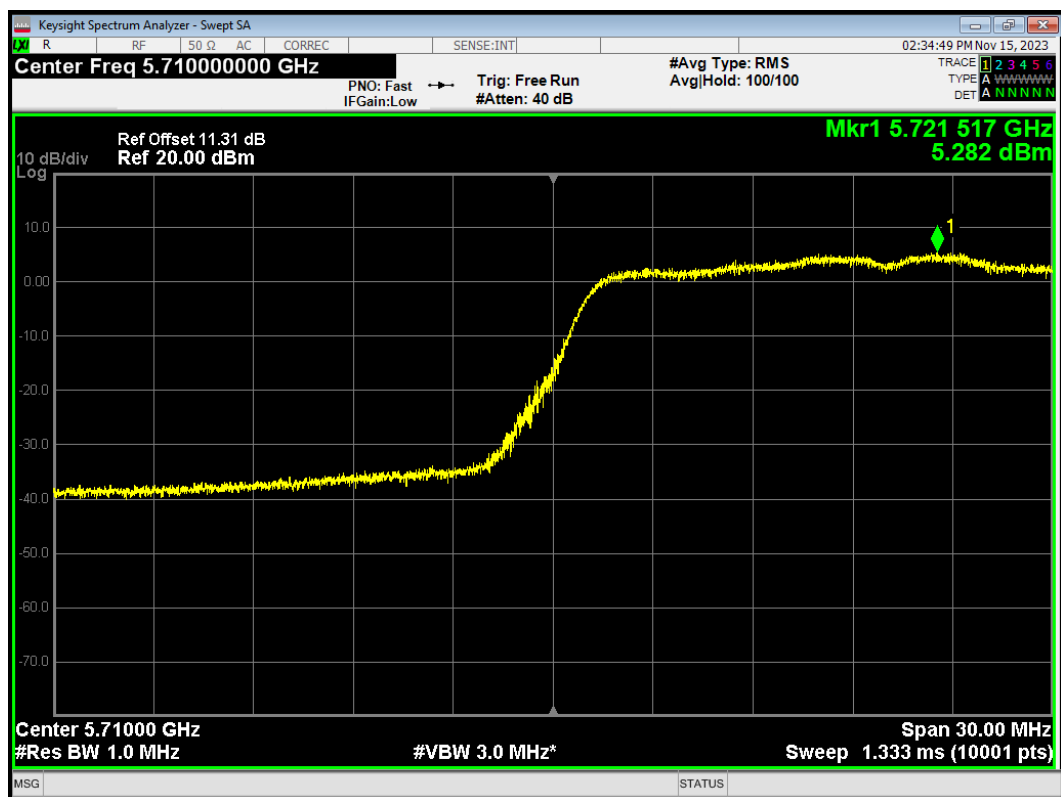


PSD 802.11n(HT40) 5510MHz

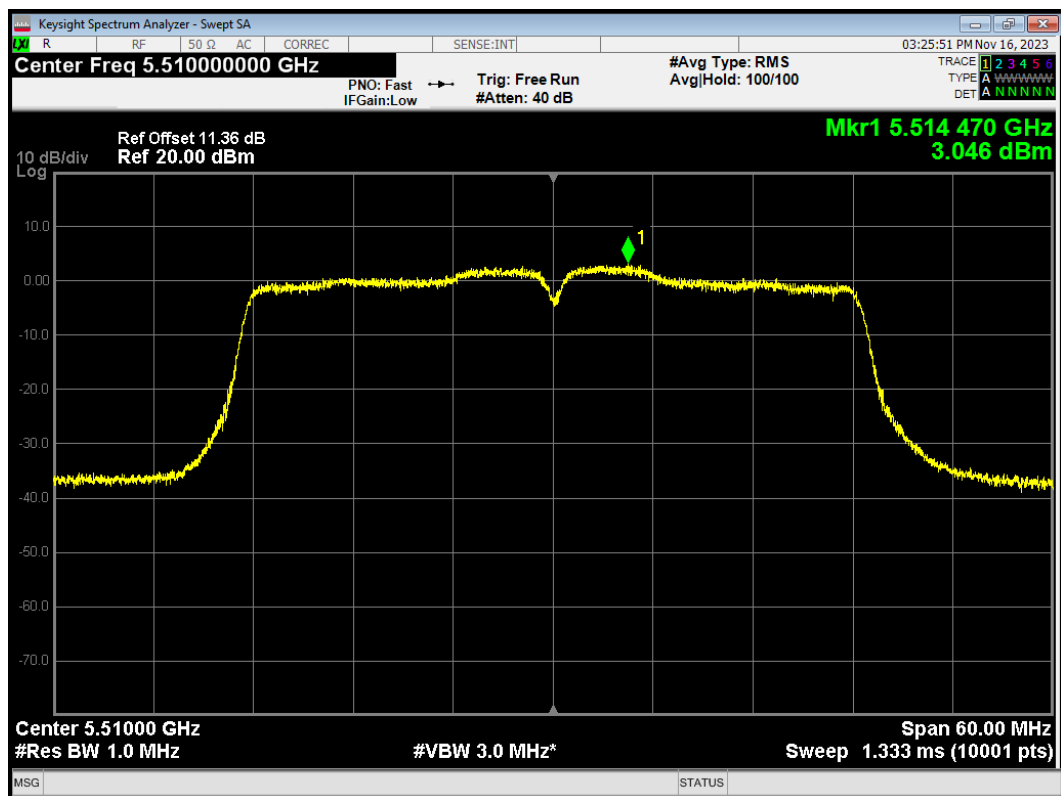


PSD 802.11n(HT40) 5550MHz

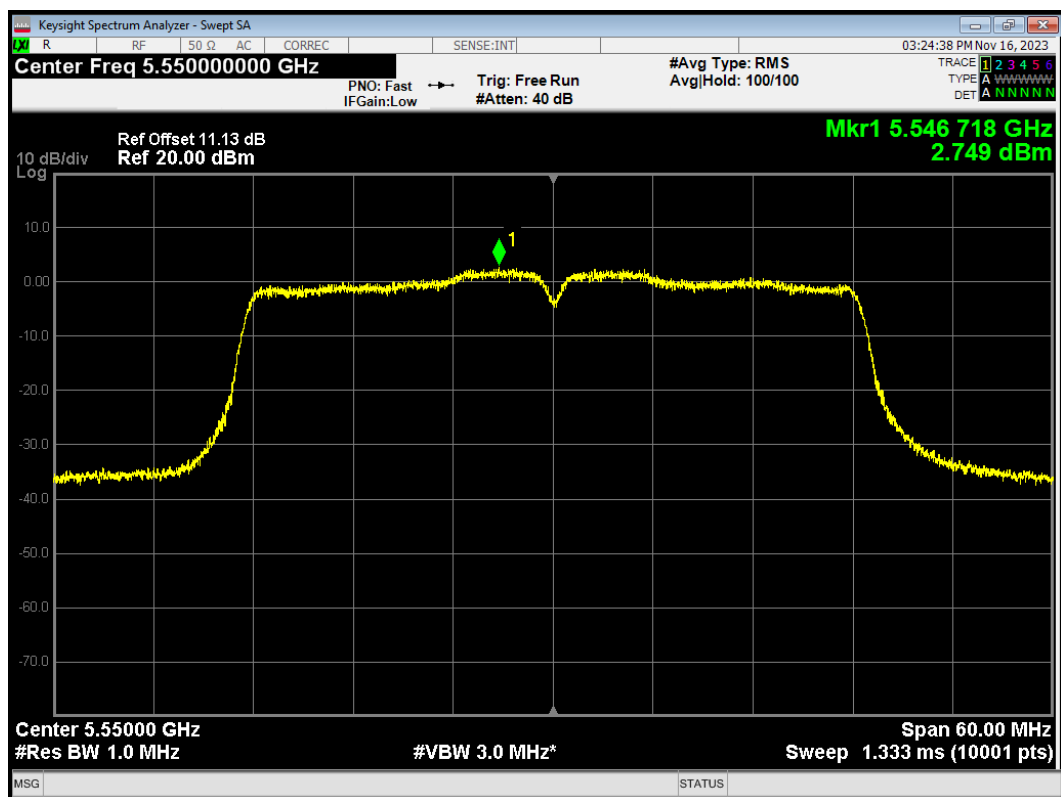

PSD 802.11n(HT40) 5670MHz

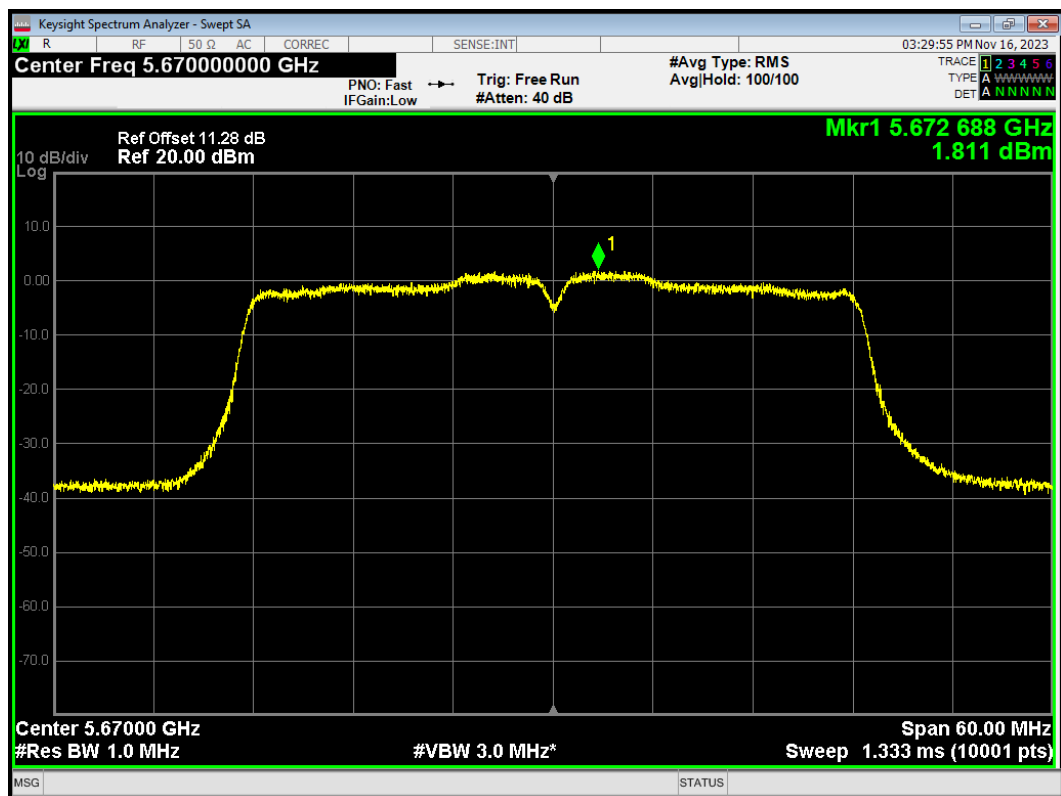


PSD 802.11n(HT40) 5710MHz

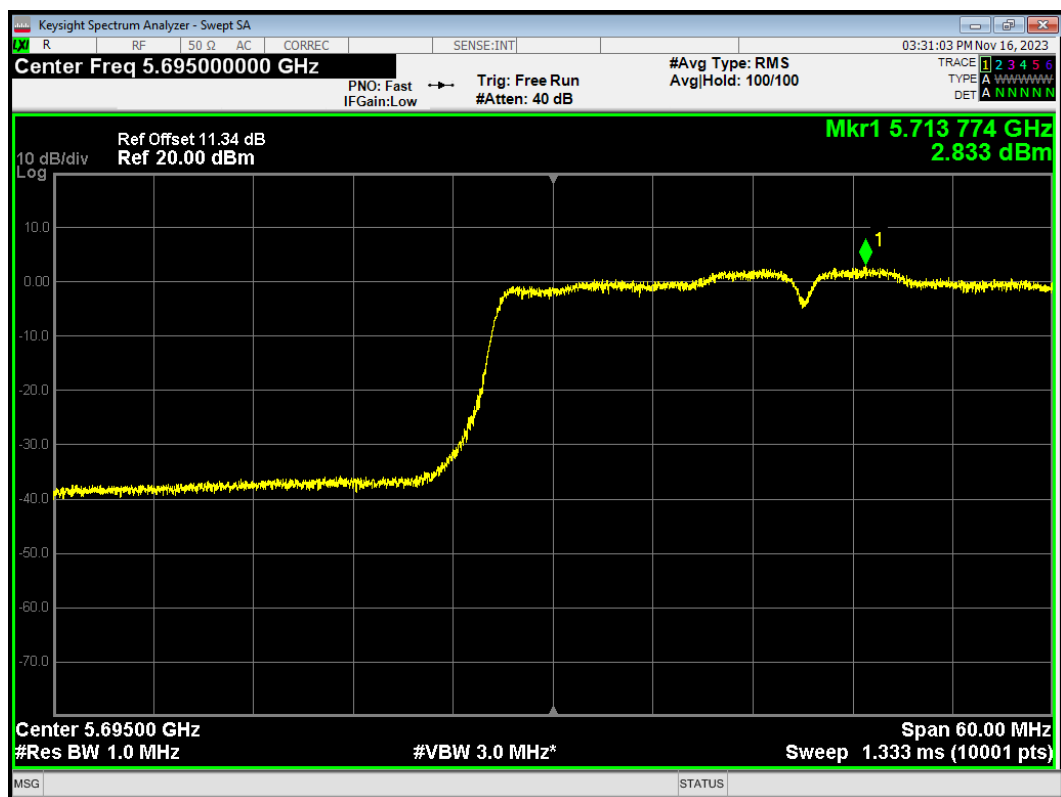


U-NII-3


PSD 802.11a 5720MHz

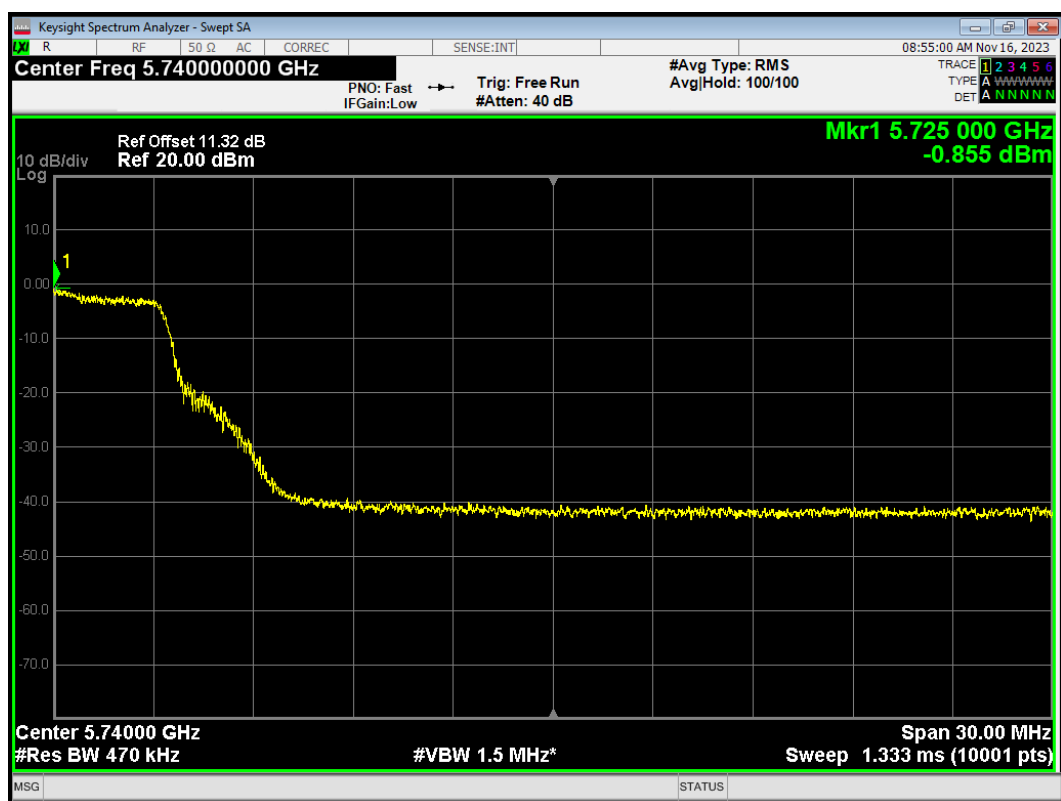


PSD 802.11a 5745MHz

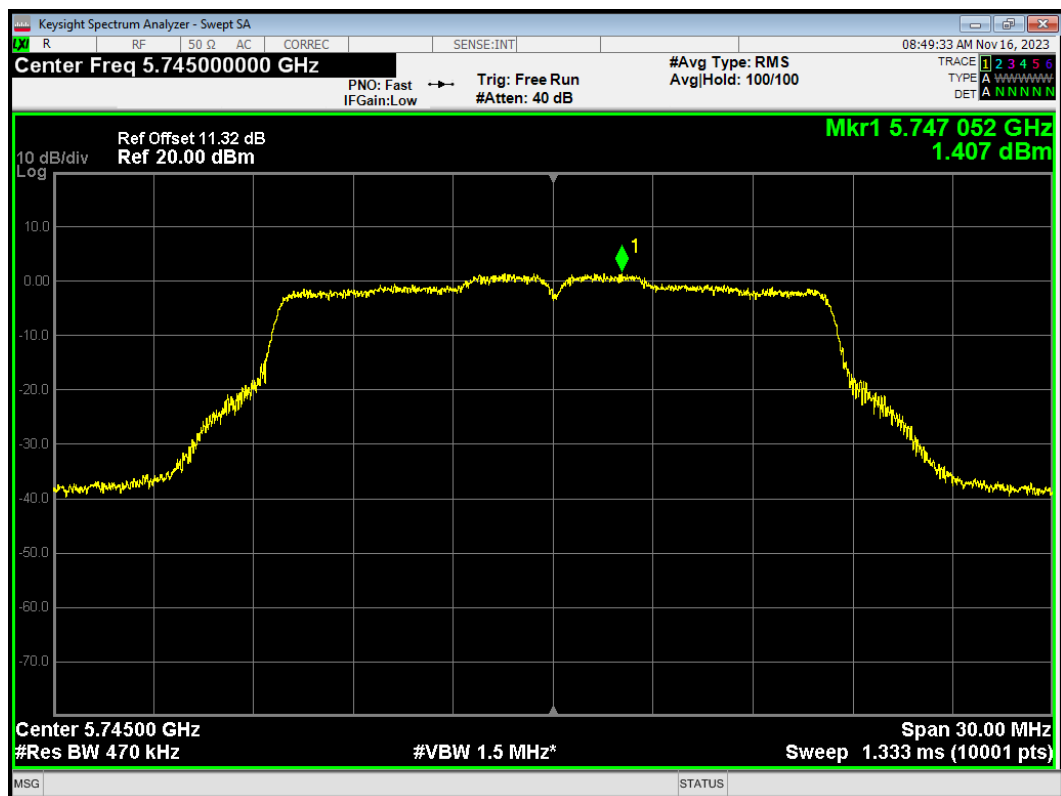


PSD 802.11a 5785MHz

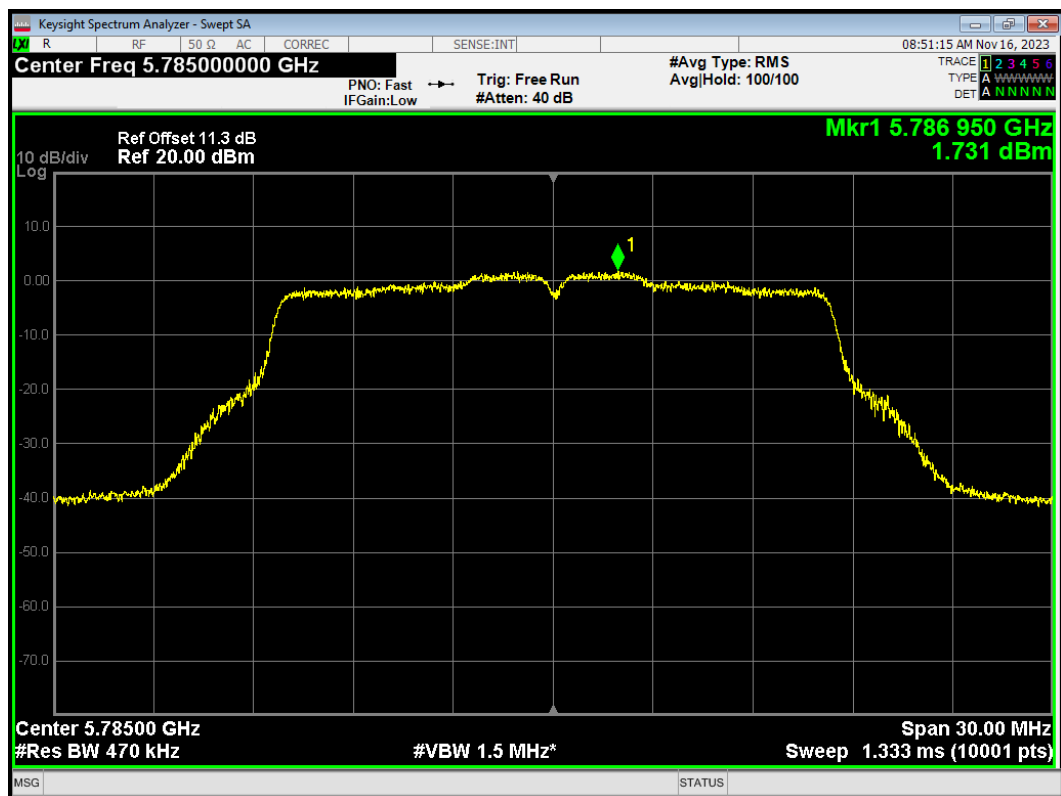


PSD 802.11a 5825MHz

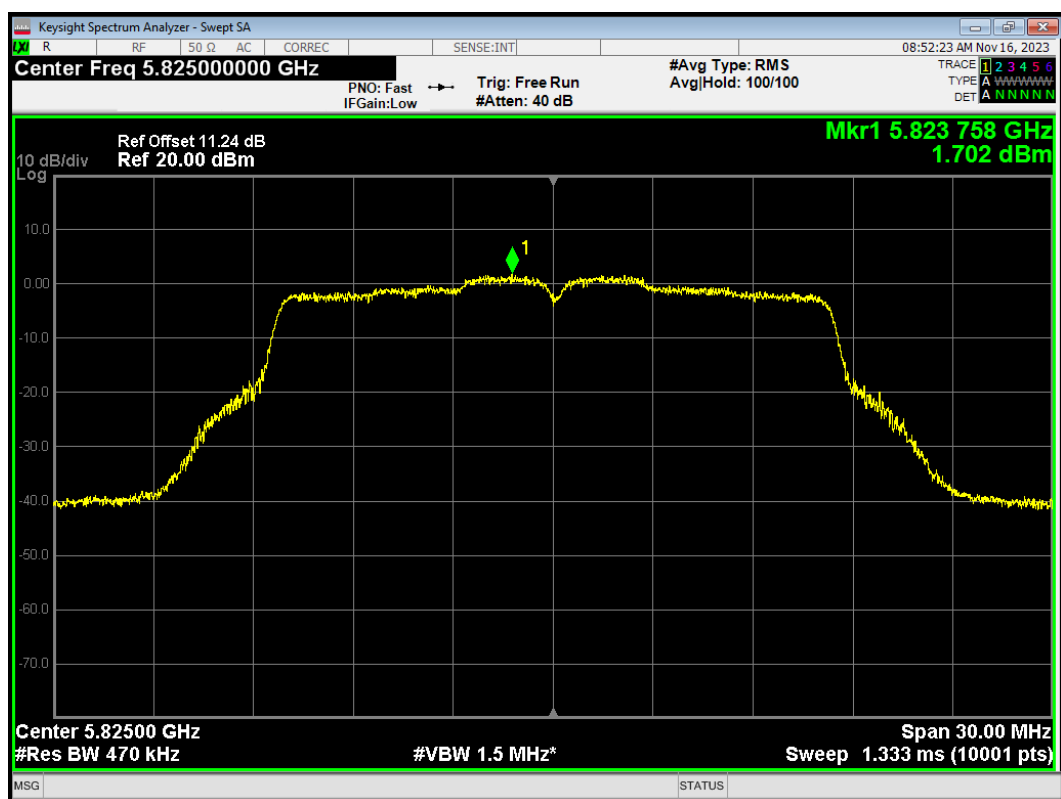


PSD 802.11ac(VHT20) 5720MHz

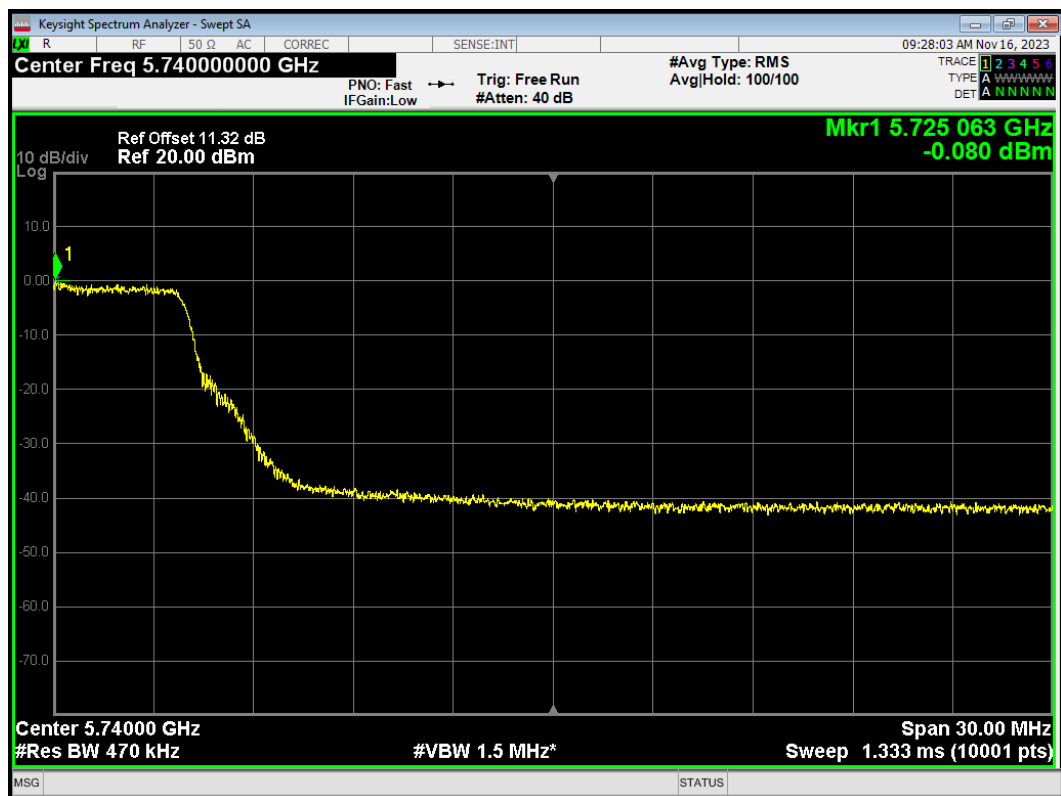


PSD 802.11ac(VHT20) 5745MHz

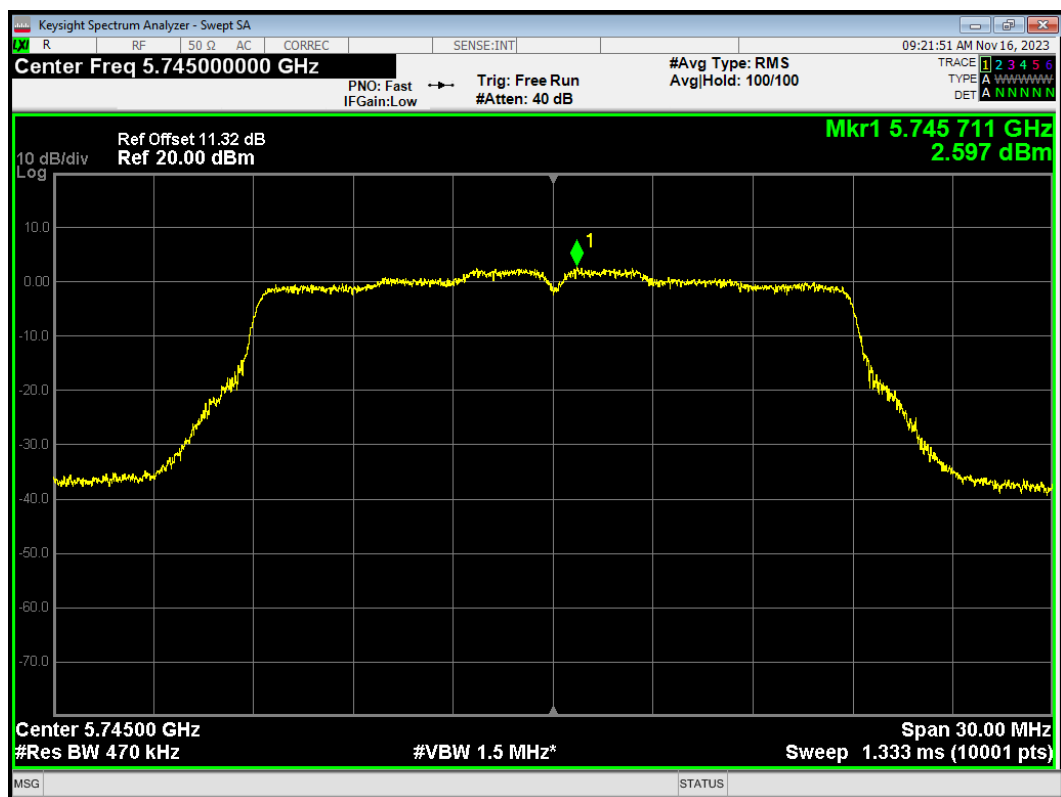


PSD 802.11ac(VHT20) 5785MHz

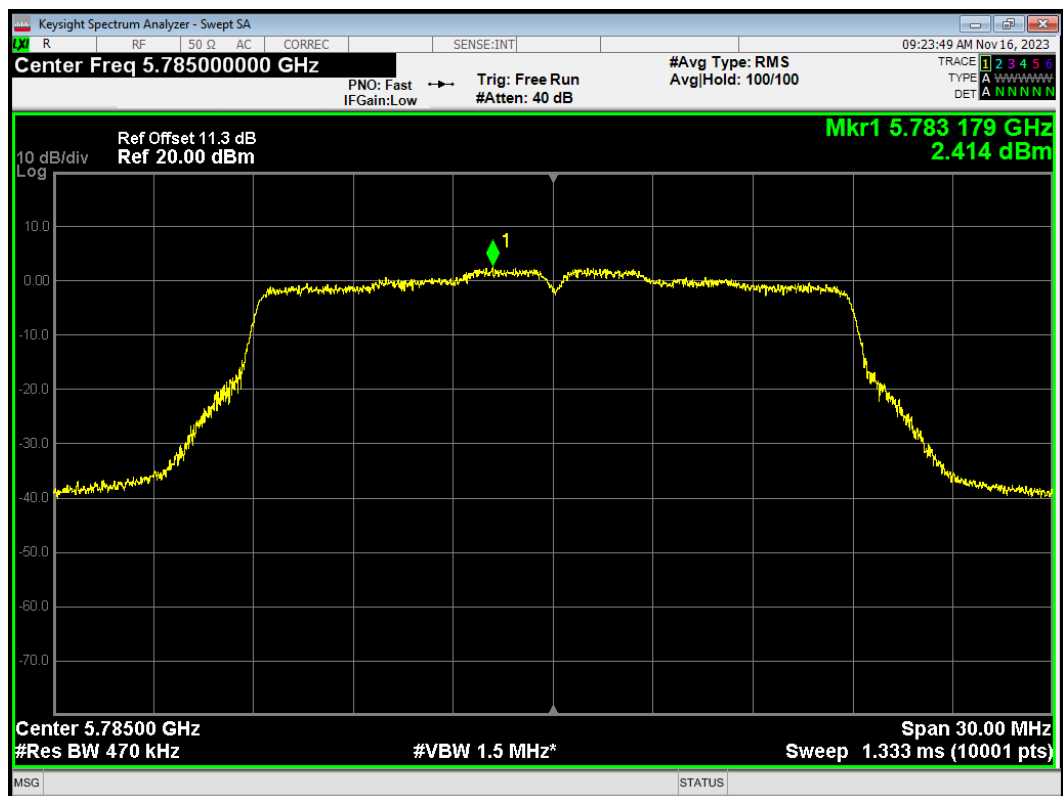

PSD 802.11ac(VHT20) 5825MHz

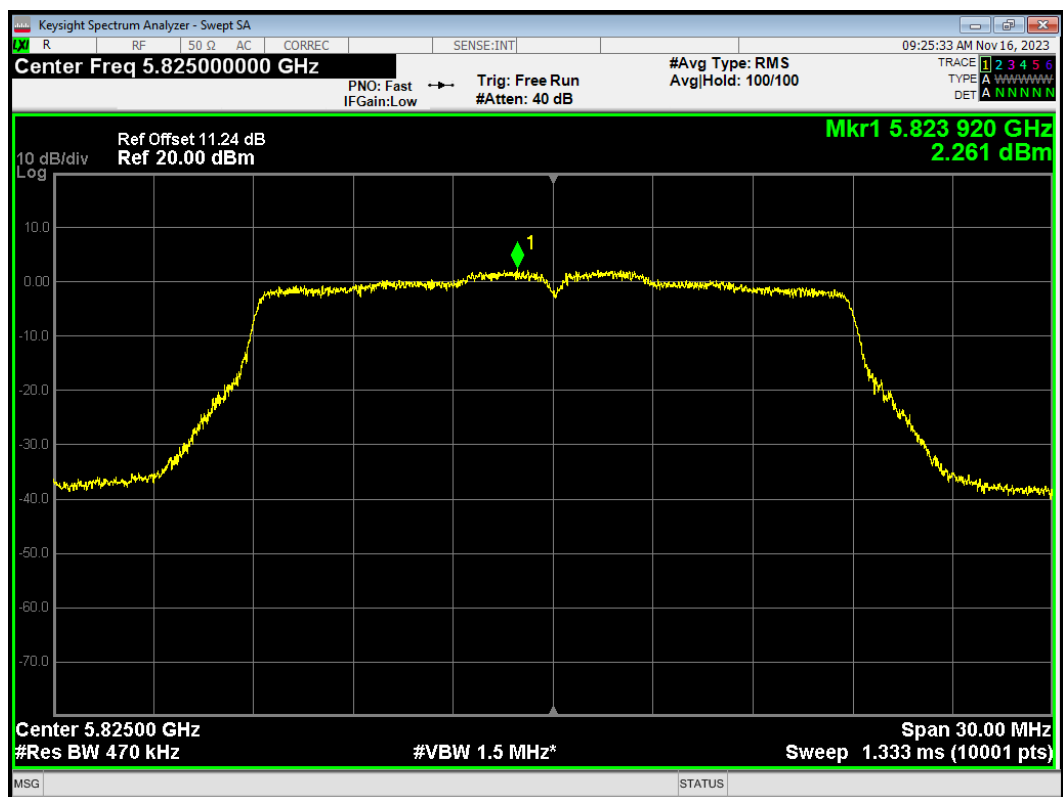

PSD 802.11ac(VHT40) 5710MHz

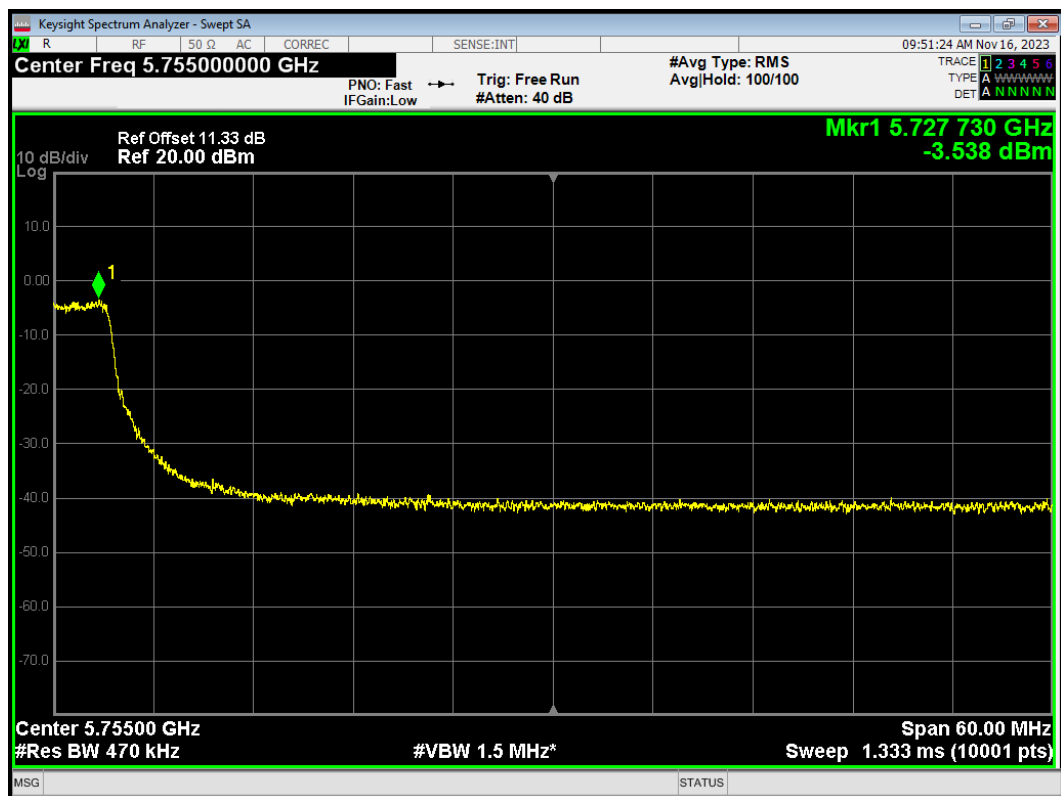

PSD 802.11ac(VHT40) 5755MHz

