


AppendixA: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
TX	Ant1	2405	1.663	0.5	PASS
TX	Ant1	2440	1.684	0.5	PASS
TX	Ant1	2480	1.627	0.5	PASS

Test Graphs

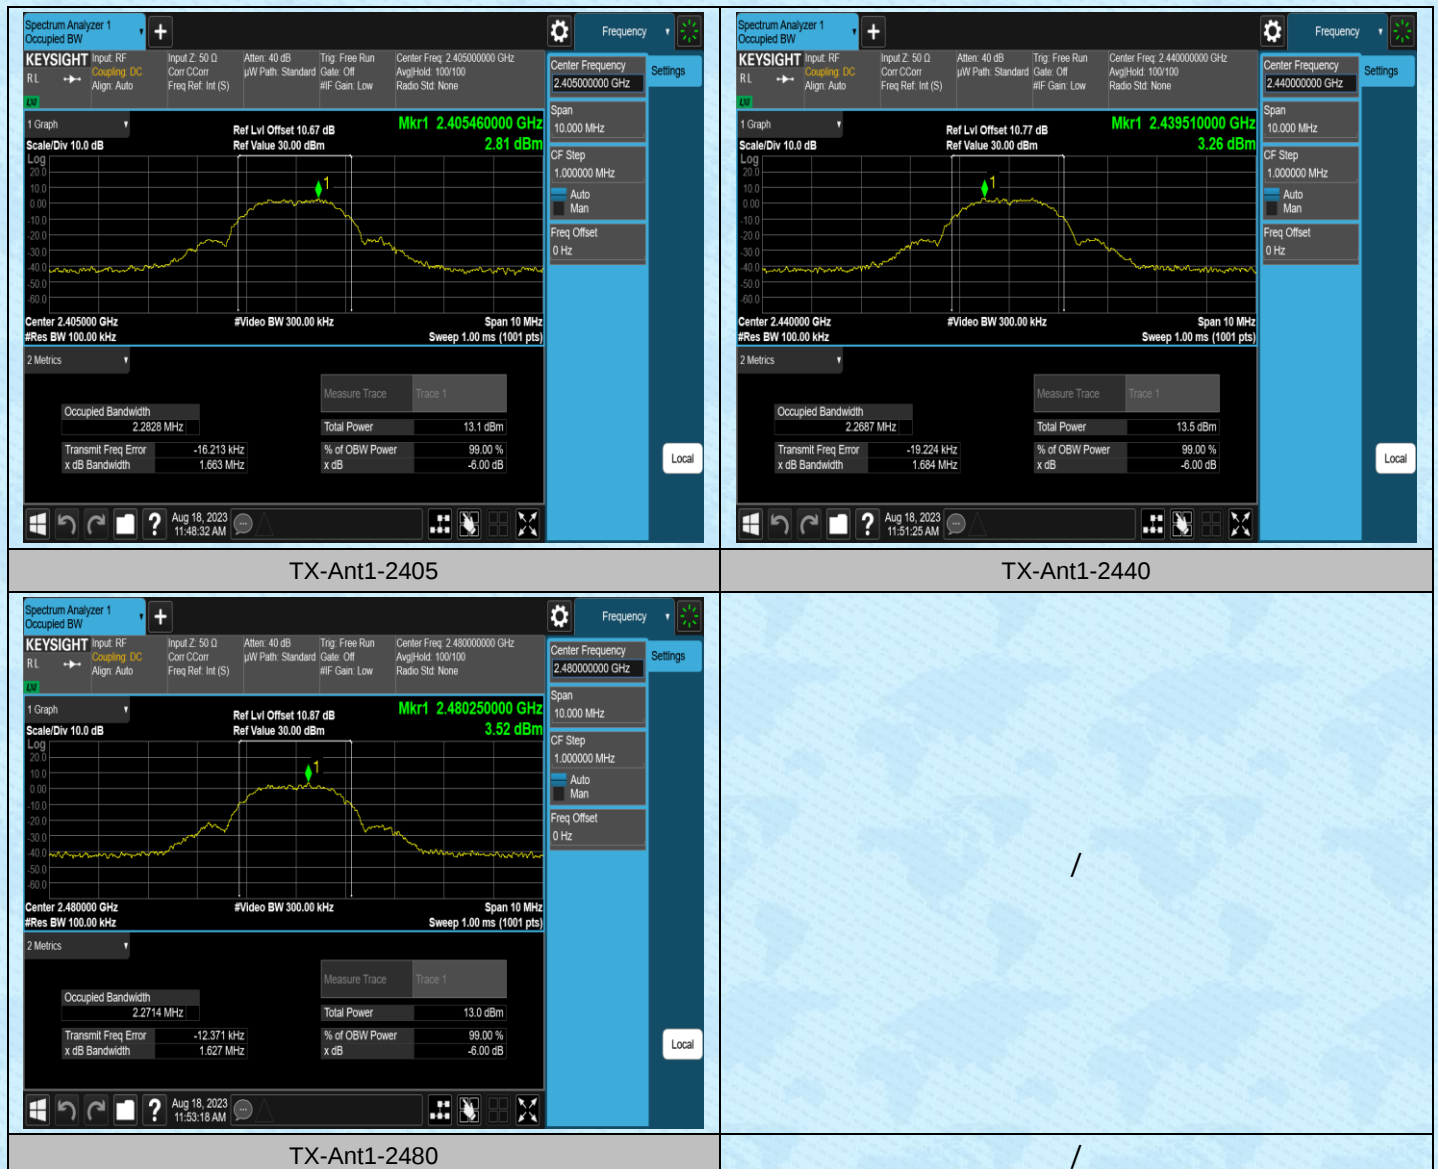


AppendixB: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
TX	Ant1	2405	2.2565	2403.8555	2406.1120
TX	Ant1	2440	2.2581	2438.8537	2441.1118
TX	Ant1	2480	2.2692	2478.8516	2481.1208

Test Graphs

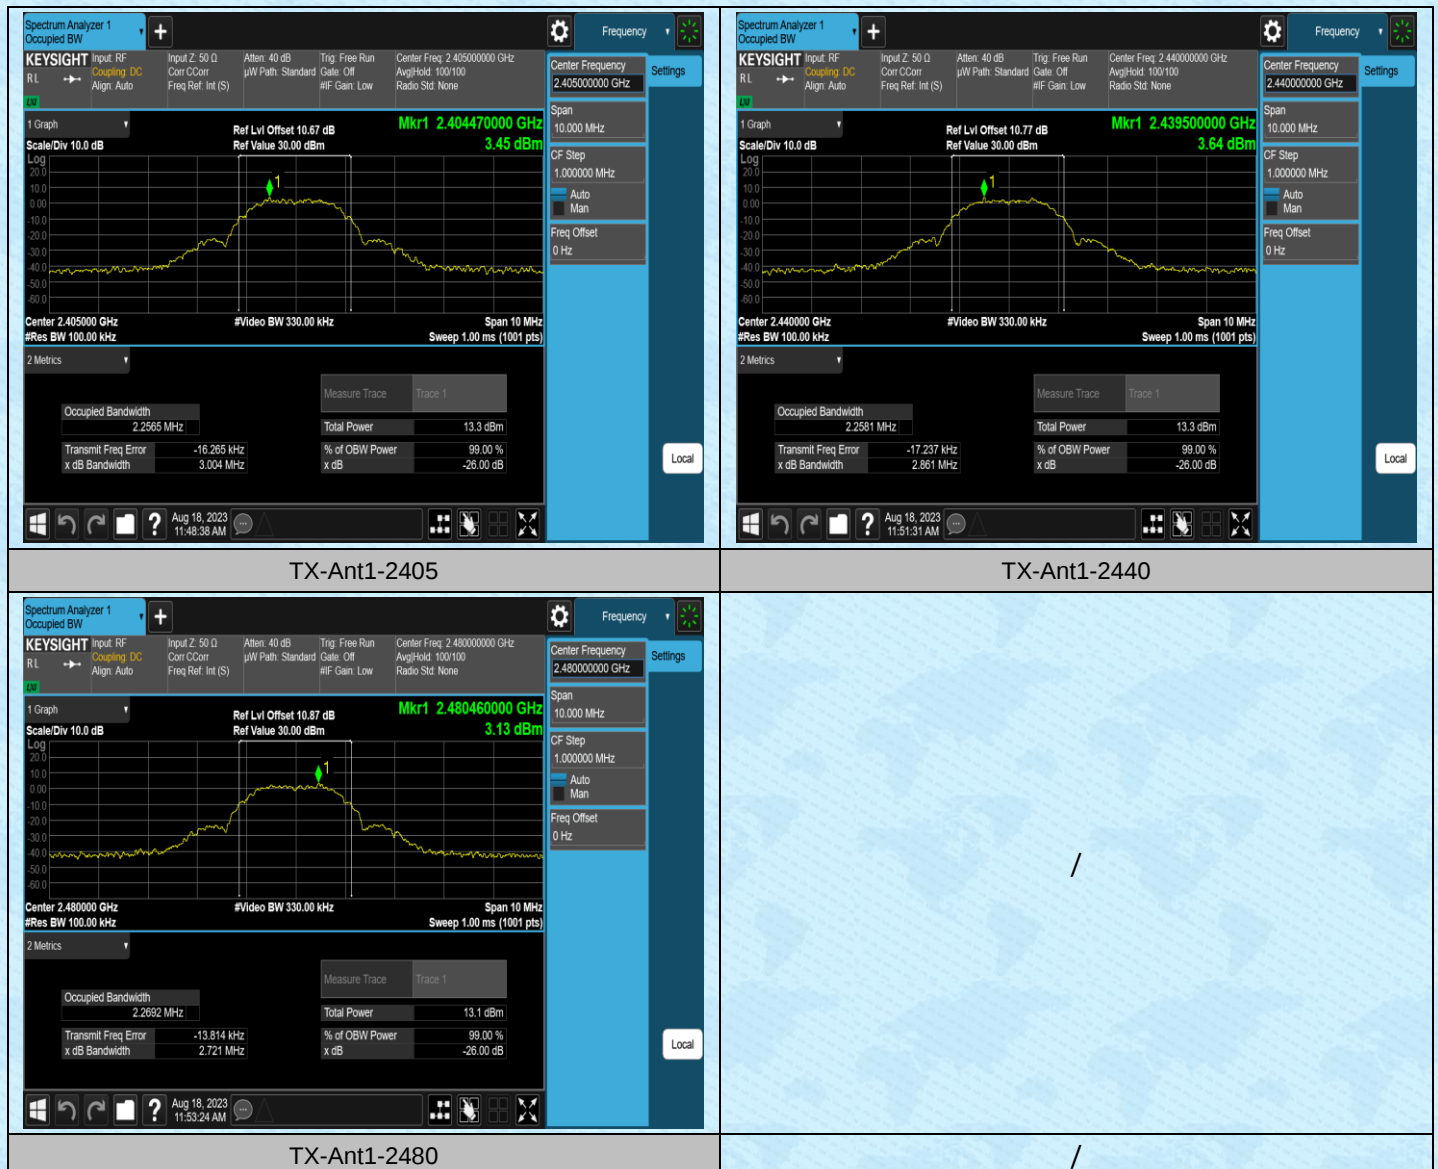

AppendixC: Maximum conducted output power**Test Result**


Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	2405	7.72	≤30	PASS
TX	Ant1	2440	7.91	≤30	PASS
TX	Ant1	2480	7.3	≤30	PASS

AppendixD: Maximum power spectral density

Test Result

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
TX	Ant1	2405	-7.85	≤8.00	PASS
TX	Ant1	2440	-7.56	≤8.00	PASS
TX	Ant1	2480	-8.13	≤8.00	PASS

Test Graphs

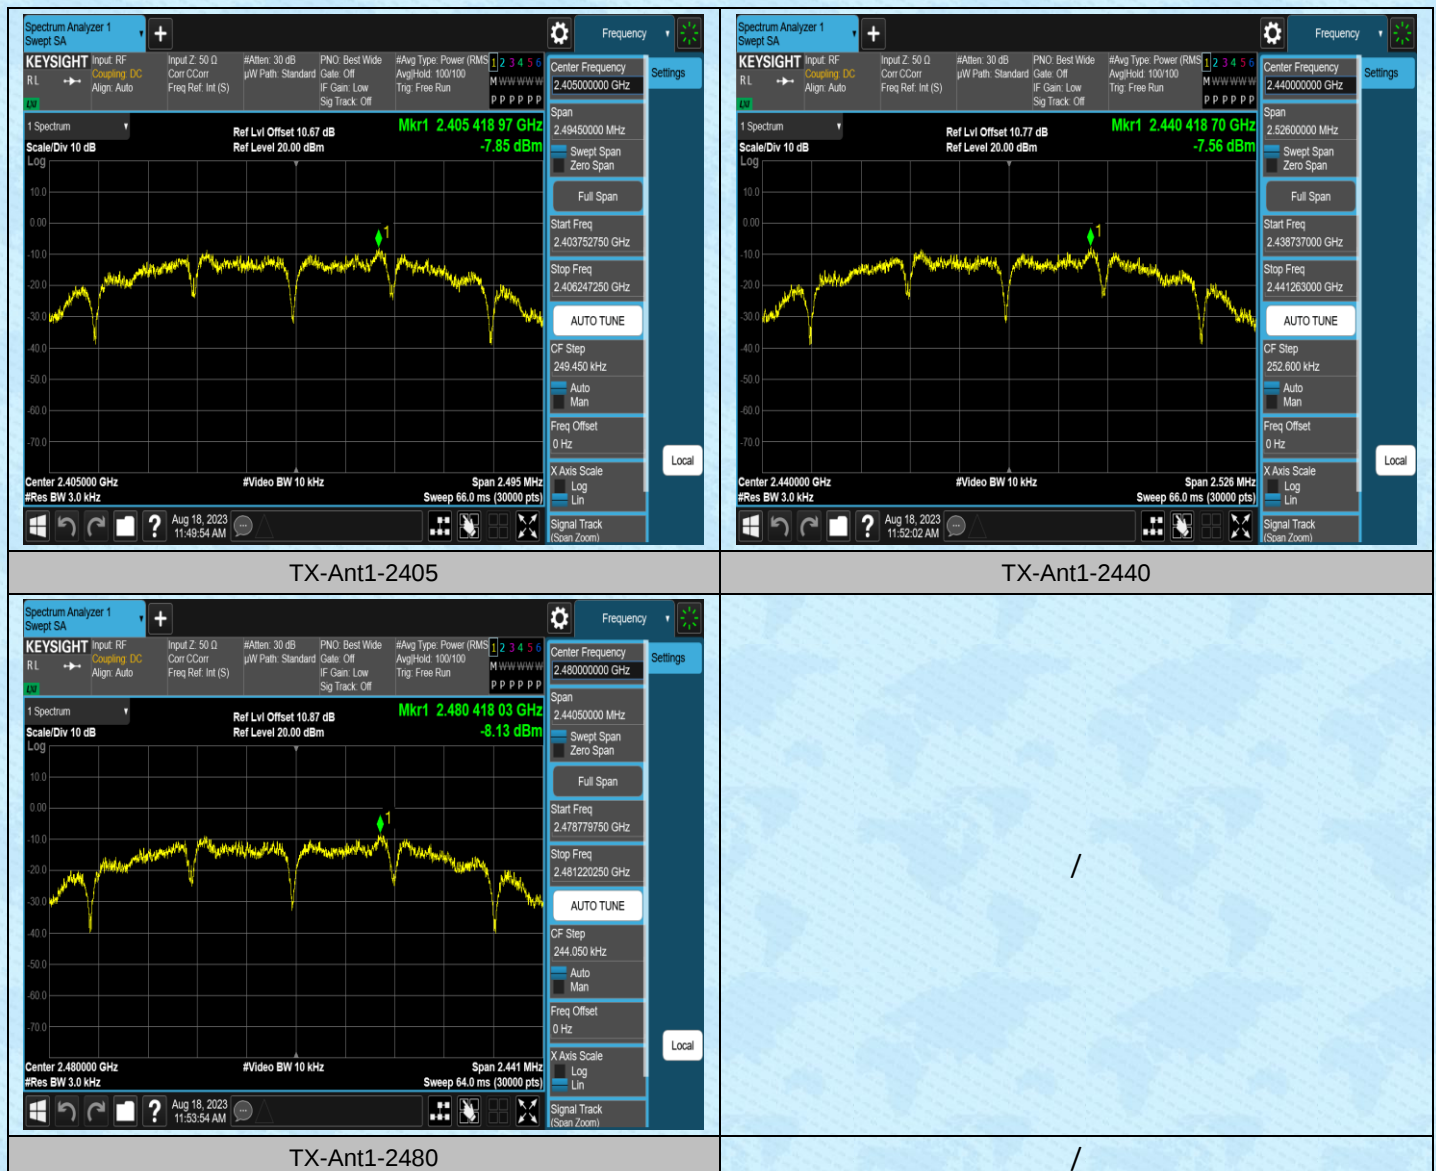


AppendixE:Band edge measurements

Test Result

Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	Low	2405	3.57	-49.7	≤-16.43	PASS
TX	Ant1	High	2480	3.39	-45.22	≤-16.61	PASS


Test Graphs

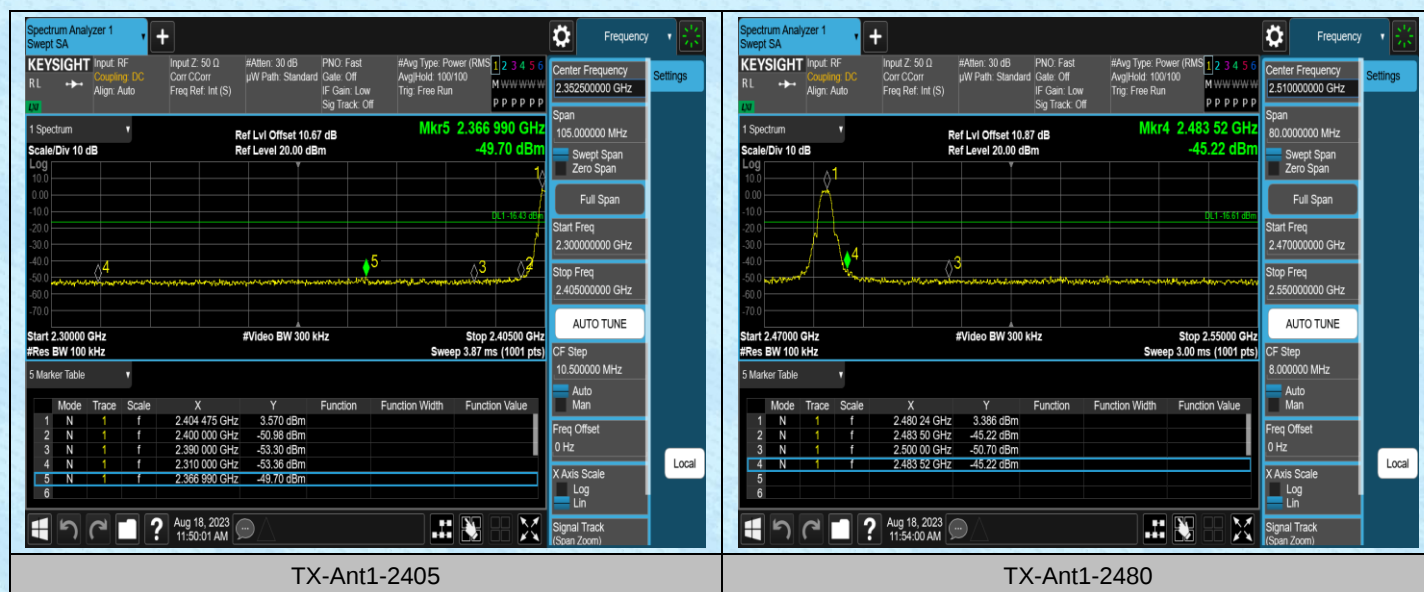

AppendixF:Conducted Spurious Emission**Test Result**

Test Mode	Antenna	Frequency [MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	2405	0~Reference	2.94	2.94	---	PASS
TX	Ant1	2405	30~1000	2.94	-62.23	≤-17.06	PASS
TX	Ant1	2405	1000~26500	2.94	-49.98	≤-17.06	PASS
TX	Ant1	2440	0~Reference	1.64	1.64	---	PASS
TX	Ant1	2440	30~1000	1.64	-61.56	≤-18.36	PASS
TX	Ant1	2440	1000~26500	1.64	-49.36	≤-18.36	PASS
TX	Ant1	2480	0~Reference	2.63	2.63	---	PASS
TX	Ant1	2480	30~1000	2.63	-61.54	≤-17.37	PASS
TX	Ant1	2480	1000~26500	2.63	-49.9	≤-17.37	PASS

Test Graphs

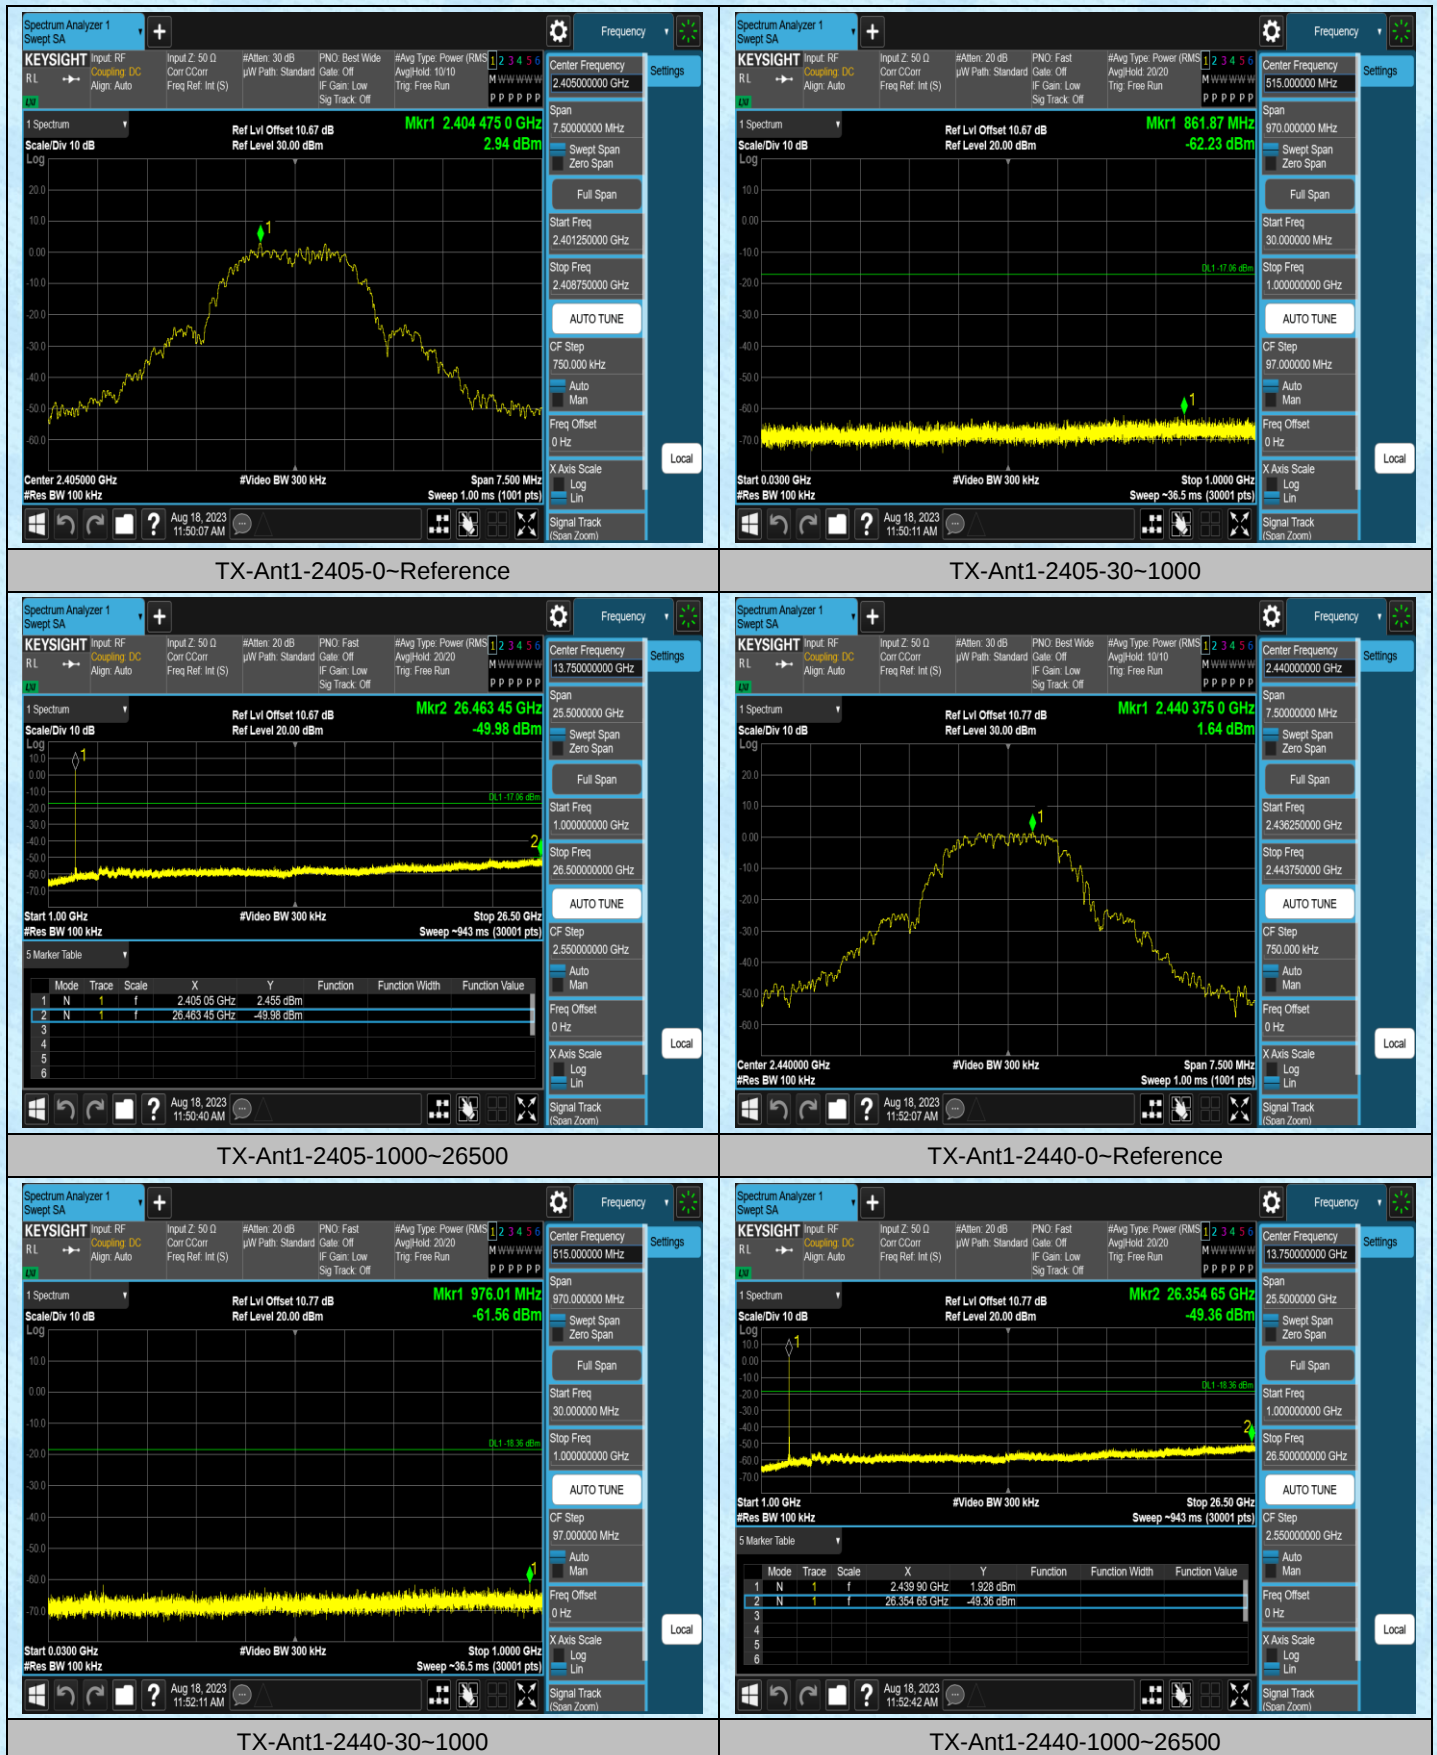




TX-Ant1-2480-0~Reference



TX-Ant1-2480-1000~26500

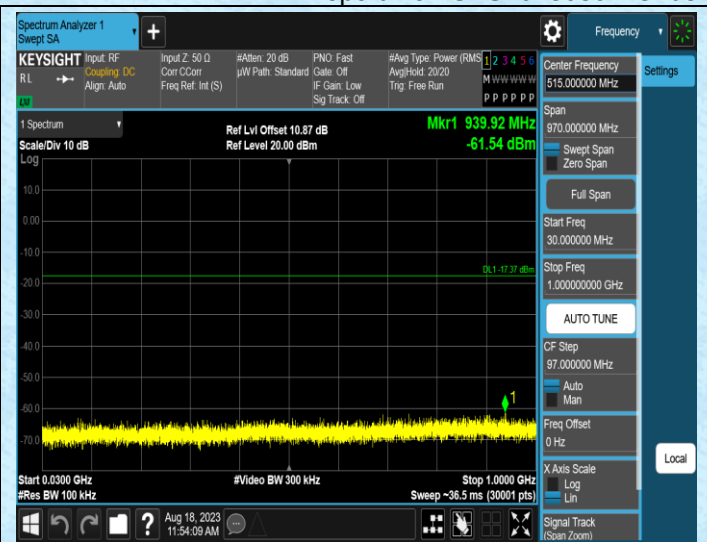

TX-Ant1-2480-30~1000

/


/

AppendixG: Duty Cycle

Test Result

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
TX	Ant1	2405	0.00	0.00	100
TX	Ant1	2440	0.00	0.00	100
TX	Ant1	2480	0.00	0.00	100

Test Graphs

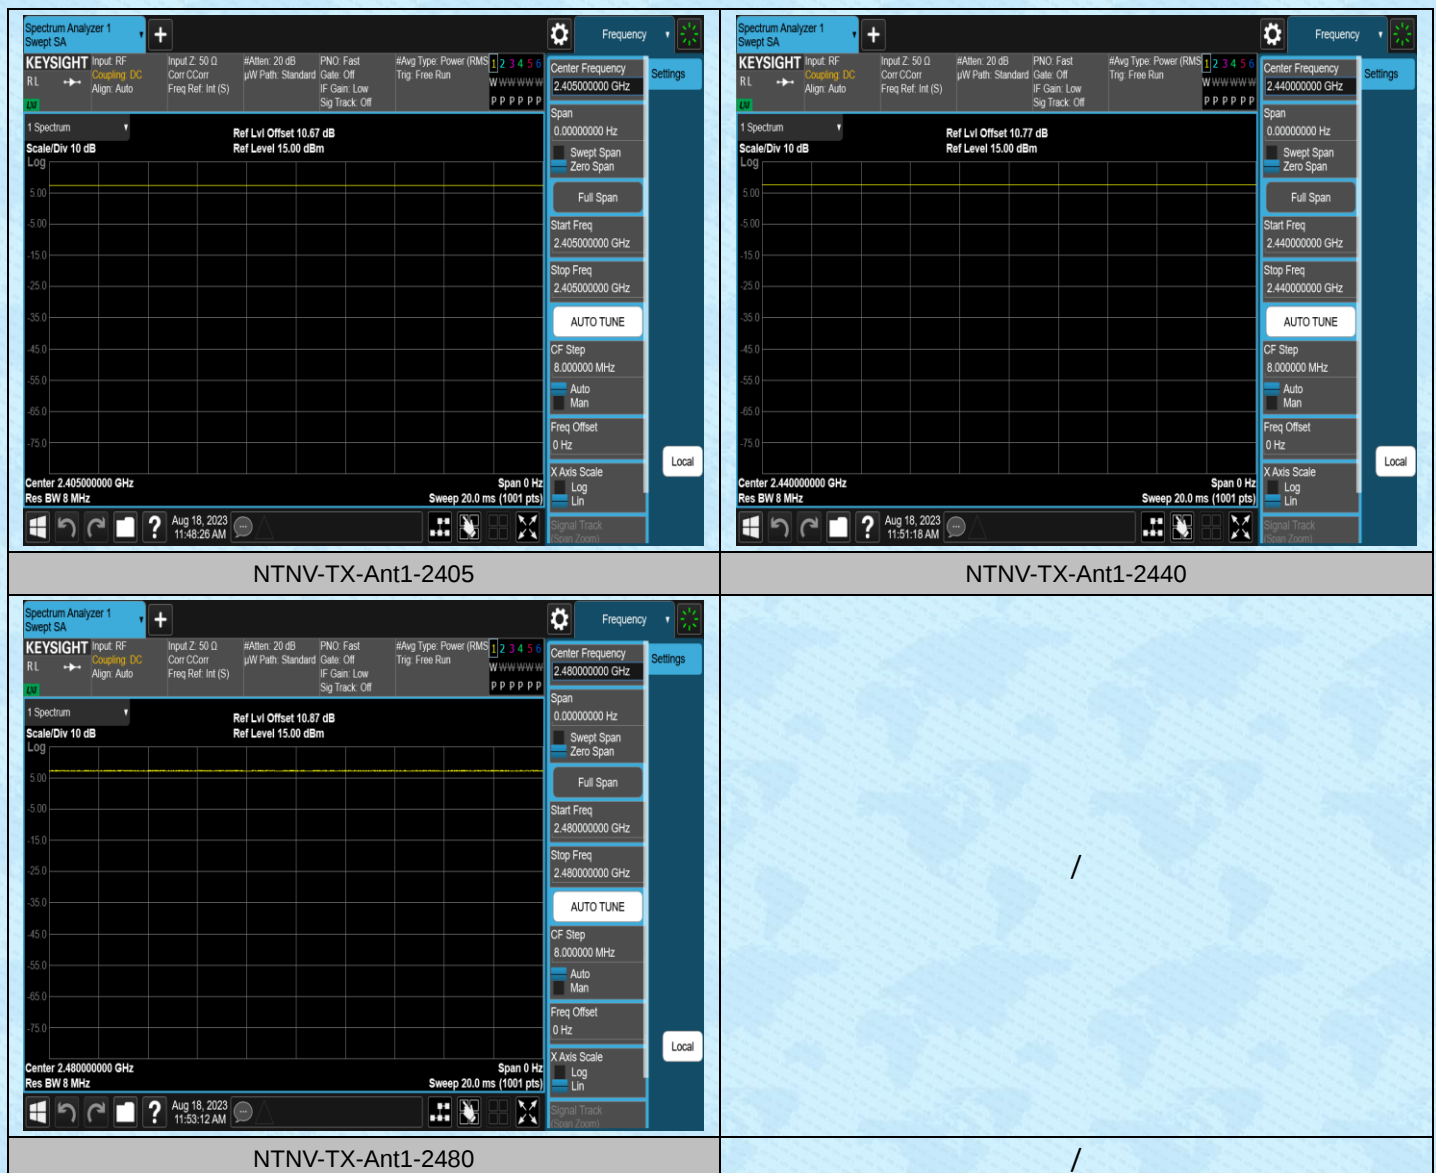

-----End-----