

**Advanced  
Compliance Laboratory**

6 Randolph Way  
Hillsborough, NJ 08844  
Tel: (908) 927 9288  
Fax: (908) 927 0728

## **ELECTROMAGNETIC EMISSION COMPLIANCE REPORT**

of

WIND SENSOR RTA  
MODEL: **WSRTA**  
FCC ID: DWNWSRTA

*July 08, 2013*

This report concerns (check one): Original grant ☒ Class II change ☐  
Equipment type: Low Power Intentional Radiator

Deferred grant requested per 47 CF 0.457(d)(1)(ii)? yes ☐ no ☒  
If yes, defer until: \_\_\_\_\_ (date)  
Company agrees to notify the Commission by \_\_\_\_\_ (date)  
of the intended date of announcement of the product so that the grant can be  
issued on that date.

Transition Rules Request per 15.37? yes ☐ no ☒  
If no, assumed Part 15, Subpart B for unintentional radiators - the new 47 CFR  
[10-1-90 Edition] provision.

Report prepared for: SOMFY SYSTEMS Inc.  
Report prepared by: Advanced Compliance Lab  
Report number: 0048-130607-01



**The test result in this report IS supported and covered by the NVLAP  
accreditation**

## Table of Contents

<b>Report Cover Page.....</b>	<b>1</b>
<b>Table of Contents.....</b>	<b>2</b>
<b>Figures.....</b>	<b>3</b>
<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1 Verification of Compliance .....	4
1.2 Equipment Modifications .....	5
1.3 Product Information .....	6
1.4 Test Methodology .....	6
1.5 Test Facility .....	6
1.6 Test Equipment .....	6
1.7 Statement of the Document Use.....	7
<b>2. PRODUCT LABELING.....</b>	<b>8</b>
<b>3. SYSTEM TEST CONFIGURATION.....</b>	<b>9</b>
3.1 Justification .....	9
3.2 Special Accessories .....	9
3.3 Configuration of Tested System.....	9
<b>4. SYSTEM SCHEMATICS .....</b>	<b>12</b>
<b>5. CONDUCTED EMISSION DATA .....</b>	<b>13</b>
5.1 Test Methods and Conditions.....	13
5.2 Test Data.....	13
<b>6. RADIATED EMISSION DATA.....</b>	<b>15</b>
6.1 Field Strength Calculation .....	15
6.2 Test Methods and Conditions.....	15
6.2 Test Data.....	15
6.4. Occupied Bandwidth.....	16
<b>7. PHOTOS OF TESTED EUT.....</b>	<b>20</b>

## Figures

<b>Figure 2.1 FCC ID Label.....</b>	<b>8</b>
<b>Figure 2.2 Location of Label on Back of the EUT.....</b>	<b>8</b>
<b>Figure 3.1 Radiated Test Setup.....</b>	<b>10</b>
<b>Figure 3.2 Conducted Test Setup, Front.....</b>	<b>11</b>
<b>Figure 3.3 Conducted Test Setup, Rear.....</b>	<b>11</b>
<b>Figure 4.1 EUT Schematics .....</b>	<b>12</b>
<b>Figure 5.1 Line Conducted.....</b>	<b>14</b>
<b>Figure 5.2 Neutral Conducted .....</b>	<b>14</b>
<b>Figure 6.1 Bandwidth Plot .....</b>	<b>17</b>
<b>Figure 6.2 Pulse Train Timing .....</b>	<b>19</b>
<b>Figure 7.1 Front View.....</b>	<b>21</b>
<b>Figure 7.2 Rear View_01 .....</b>	<b>22</b>
<b>Figure 7.3 Insider View_02.....</b>	<b>23</b>
<b>Figure 7.4 Insider View .....</b>	<b>24</b>
<b>Figure 7.5 Component Side .....</b>	<b>25</b>
<b>Figure 7.6 Foil Side.....</b>	<b>26</b>
<b>Figure 7.7 AC Adaptor.....</b>	<b>27</b>

## 1. GENERAL INFORMATION

### 1.1 Verification of Compliance

EUT: WIND SENSOR RTA

Model: WSRTA

Applicant: SOMFY SYSTEMS INC.

Test Type: FCC Part 15C CERTIFICATION (15.231(a))

Result: PASS

Tested by: ADVANCED COMPLIANCE LABORATORY


Test Date: July 08, 2013

Report Number: 0048-130607-01

The above equipment was tested by Compliance Laboratory, Advanced Technologies, Inc. for compliance with the requirement set forth in the FCC rules and regulations Part 15 subpart C. This said equipment in the configuration described in the report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

The estimated uncertainty of the test result is given as following. The method of uncertainty calculation is provided in Advanced Compliance Lab. Doc. No. 0048-01-01.

	Prob. Dist.	Uncertainty(dB)	Uncertainty(dB)	Uncertainty(dB)
		30-1000MHz	1-6.5GHz	Conducted
Combined Std. Uncertainty $u_c$	norm.	$\pm 2.36$	$\pm 2.99$	$\pm 1.83$



Wei Li  
Lab Manager  
Advanced Compliance Lab

Date: July 08, 2013

## N/A

## System Configuration

(1) EUT submitted for grant.

Radiated tests were performed according to the procedures in ANSI C63.4-2003 at an antenna to EUT distance of 3 meters.

The open area test site and conducted measurement facility used to collect the radiated and conducted data are located at Hillsborough, New Jersey. This site has been accepted by FCC to perform measurements under Part 15 or 18 in a letter dated May 19, 1997 (Refer to: 31040/PRV 1300F2). The NVLAP Lab code for accreditation of FCC EMC Test Method is: 200101-0.

Manufacture	Model	Serial No.	Description	Cal Due dd/mm/yy
Hewlett-Packard	HP8546A	3448A00290	EMI Receiver	15/10/13
EMCO	3104C	9307-4396	20-300MHz Biconical Antenna	15/01/14
EMCO	3146	9008-2860	200-1000MHz Log-Periodic Antenna	15/01/14
Fischer Custom	LISN-1	900-4-0008	Line Impedance Stabilization Networks	18/03/14
Fischer Custom	LISN-2	900-4-0009	Line Impedance Stabilization Networks	24/03/14
EMCO	3115	4945	Double Ridge Guide Horn Antenna	22/01/14
Agilent	E4440A	US40420700	PSA Spectrum Analyzer	25/08/14

**All Test Equipment Used are Calibrated Traceable to NIST Standards.**

### **1.7 Statement for the Document Use**


This report shall not be reproduced except in full, without the written approval of the laboratory. And this report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

## 2. PRODUCT LABELING

**FCC ID: DWNWSRTA**

**This device complies with part 15 of the FCC Rules. Operating is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.**

**Figure 2.1 FCC ID Label**

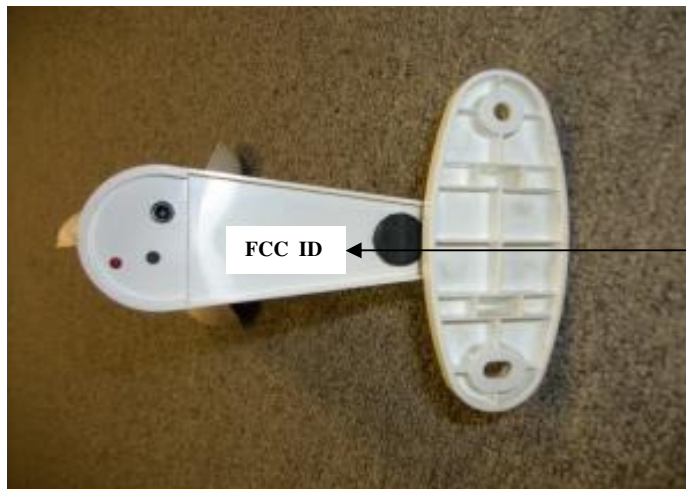

**Figure 2.2 FCC ID Label Location**



### **3. SYSTEM TEST CONFIGURATION**

#### **3.1 Justification**

The system was configured for testing in a typical fashion (as a customer would normally use it). Its antenna is on PCB. The EUT is WIND SENSOR RTA and does not send data.

The transmission does stop when the button is released after the completion of the frame. This time is less than 5 seconds.

Testing was performed as EUT was operated continuously. Fresh batteries were used.

#### **3.2 Special Accessories**

N/A

#### **3.3 Configuration of Tested System**

Figure 3.x illustrate this system, which is tested standing along.







**Figure 3.2 Conducted Setup- Front**



**Figure 3.3 Conducted Setup- Rear**

See Attachment.

### Figure 4.1 System Schematics

## 5. CONDUCTED EMISSION DATA

### 5.1 Test Methods and Conditions

The EUT was under normal operational mode during the conducted emission test. EMI Receiver was scanned from 150KHz to 30MHz with maximum hold mode for maximum emission. Recorded data was sent to the plotter to generate output in linear format. At the input of the spectrum analyzer, a HP transient limiter is inserted for protective purpose. This limiter has a 10 dB attenuation in the range of 150KHZ to 30MHZ. That factor was automatically compensated by the receiver, so the readings are the corrected readings. The reference of the plot is the CISPR 22 Class B limit in Figure 5.1 through Figure 5.2.

Conducted Emission Technical Requirements				
	Class A		Class B	
Frequency Range	Quasi-Peak dBuV	Average dBuV	Quasi-Peak DBuV	Average dBuV
150kHz -0.5MHz	79 (8912uV)	66 (1995uV)	66-56	56-46
0.5MHz-30MHz	73 (4467uV)	60 (1000uV)	---	---
0.5MHz- 5MHz	---	---	56	46 (250uV)
5MHz-30MHz	---	---	60	50

Emissions that have peak values close to the specification limit (if any) are also measured in the quasi-peak mode to determine compliance.

### 5.2 Test Data


Figure 5.1-5.2 show the neutral and line conducted emissions for the standard operation.

## Line



MARKER  
150 kHz  
19.12 dBμV

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 150 kHz  
19.12 dBμV

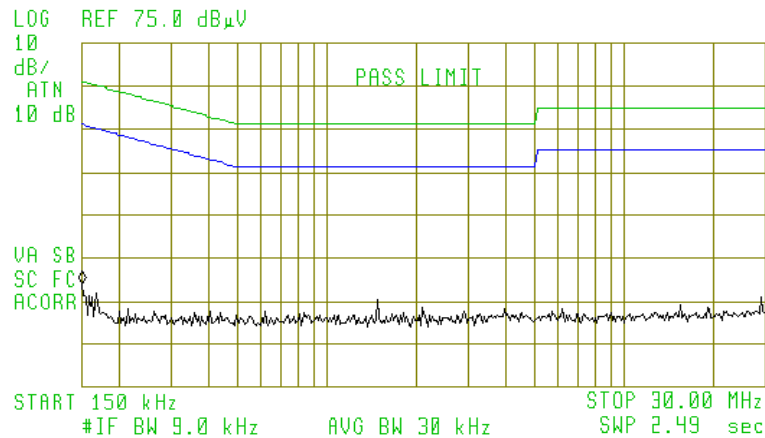


## Neutral



MARKER  
150 kHz  
19.26 dBμV

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 150 kHz  
19.26 dBμV

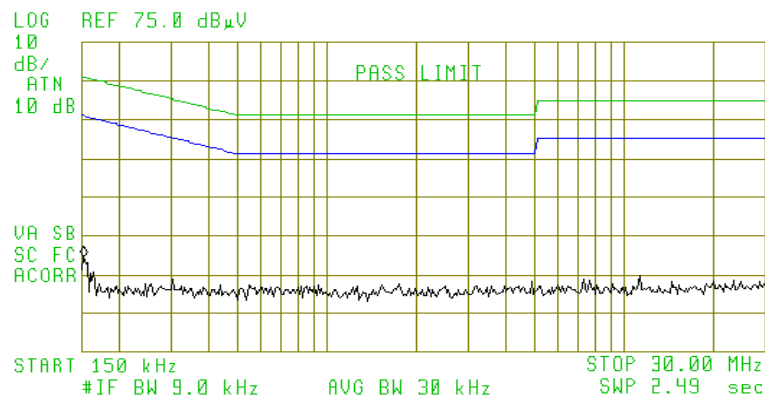

Test Personnel:

Tester Signature: David Tu

Date: July 5, 2013

Typed/Printed Name: David Tu

## 6. RADIATED EMISSION DATA

### 6.1 Field Strength Calculation

The corrected field strength is automatically calculated by EMI Receiver using following:

$$FS = RA + AF + CF + AG$$

where FS: Corrected Field Strength in dB $\mu$ V/m

RA: Amplitude of EMI Receiver before correction in dB $\mu$ V

AF: Antenna Factor in dB/m

CF: Cable Attenuation Factor in dB

AG: Built-in Preamplifier Gain in dB (Stored in receiver as part of the calibration data)

The pulse train timing plots are showed in Figure 6.2.

The pulse train timing plots as follows:

The total time for each pulse train is 139.62 ms, The short pulse is 0.640ms, The middle pulse is 2.5 ms, The long pulse is 4.8ms.

Coeff.  $= (55 \times 0.640 + 1 \times 4.8 + 5 \times 2.5) / 100 = 0.525$

The maximum average field strength should be 0.525 of the peak field strength measured.

So we use peak value minus 5.6dB as calculated maximum average field strength.

### 6.2 Test Methods and Conditions

The initial step in collecting radiated data is a EMI Receiver scan of the measurement range below 30MHz using peak detector and 9KHz IF bandwidth / 30KHz video bandwidth. For the range under 1GHz, 120KHz IF bandwidth / 120KHz video bandwidth are used. Both bandwidths are 1MHz for above 1GHz measurement. Up to 10<sup>th</sup> harmonics were investigated.

### 6.3 Test Data

The following data lists the significant emission frequencies, polarity and position, peak reading of the EMI Receiver, the FCC limit, and the difference between the peak reading and the limit. Explanation of the correction and calculation are given in section 6.1.

Test Personnel:



Typed/Printed Name: Edward Lee

Date: July 02, 2013



## Radiated Test Data

Freq. (MHz)	Worst H/V	Height. (m)	Azimuth	Peak@3m (dBuV/m)	QP/Avg @3m (dBuV/m)	PK Lim (dBuV/m)	QP /Avg. Lim (dBuV/m)	PK Mar (dBuV/m)	QP /Avg. Mar. (dBuV/m)
434	H	1.1	170	85.6	80.0	100.80	80.80(3)	-15.2	-0.8
868	H	1.0	090	47.9	42.3	80.80	60.80(4)	-32.9	-18.5
1302	H	1.1	180	49.4	43.8	74	54.0(2)	-24.6	-10.2
1736	H	1.1	000	54.4	48.8	80.80	60.80	-26.4	-12
2170	H	1.1	000	44.9	39.3	80.80	60.80	-35.9	-21.5
2604	H	1.1	000	45.6	40.0	74	54.0	-28.4	-14
434	V	1.2	180	84.6	79.0	100.80	80.80	-16.2	-1.8
868	V	1.1	090	53.4	47.8	80.80	60.80	-27.4	-13
1302	V	1.1	000	49.9	44.3	74	54.0	-24.1	-9.7
1736	V	1.1	000	52.2	46.6	80.80	60.80	-28.6	-14.2
2170	V	1.1	270	45.1	39.5	80.80	60.80	-35.7	-21.3
2604	V	1.1	180	55.3	49.7	74	54.0	-18.7	-4.3

- (1) See Figure 3.1, 3.2 and 3.3 for definition of position X-1, Y-2, Z-3.  
(2) Restricted band.  
(3) Fundamental limit is 1500-5000 microvolts/meter linear interpolations (average reading) for 260-470 MHz fundamental frequency range; 4390uV/m for 433.4MHz Fundamental. Per FCC 15.231(b).  
(4) Spurious limit is 150-500 microvolts/meter linear interpolations (average reading). Per 15.231(b).

## 6.4 Occupied Bandwidth

The bandwidth of the emission shall be no wider than 0.25% of the center frequency, in this case, 1.0848MHz(433.92x0.25%). Bandwidth is determined at the points 20dB down from the modulated carrier. Figure 5.2 shows the occupied bandwidth plot.




MARKER  $\Delta$   
160 kHz  
.14 dB

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR  $\Delta$  160 kHz  
.14 dB

LOG REF 90.0 dB $\mu$ V/m

10  
dB/  
ATN  
10 dB

DL  
66.5  
dB $\mu$ V/m  
VA SB  
SC FC  
ACORR

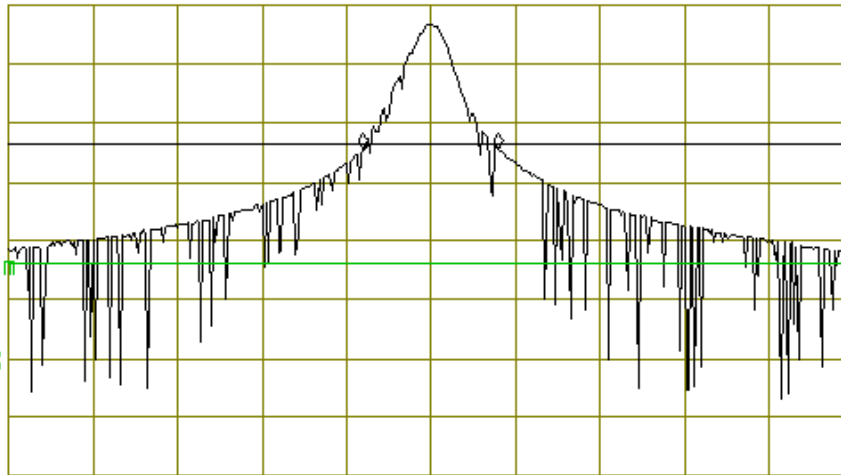


CENTER 433.920 MHz  
#IF BW 30 kHz

AVG BW 30 kHz

SPAN 1.000 MHz  
SWP 20.0 msec

**Figure 6.1 Occupied Bandwidth**

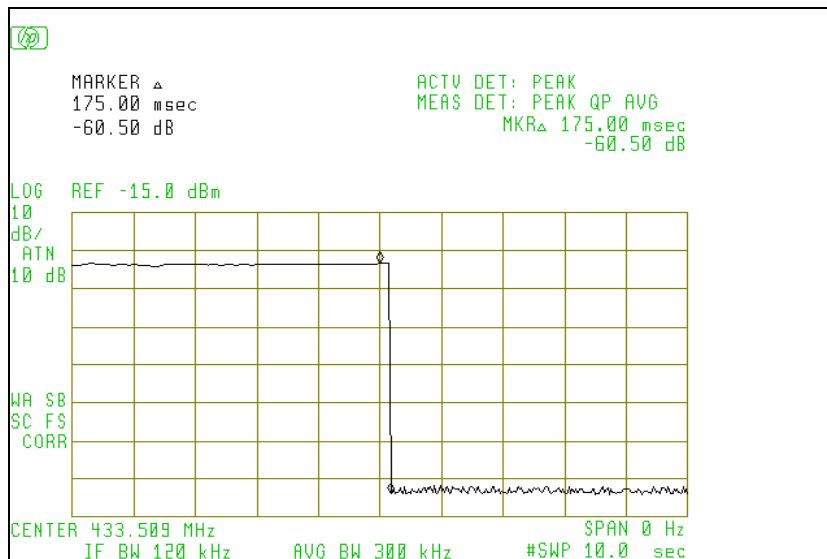

Tx stopped within 5s after button released



MARKER  $\Delta$   
4.8000 msec  
-17.36 dB


ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR  $\Delta$  4.8000 msec  
-17.36 dB

LOG REF -15.0 dBm

10  
dB/  
ATN  
10 dB

WA SB  
SC FS  
CORR

CENTER 433.480 MHz  
IF BW 120 kHz  
AVG BW 300 kHz  
SPAN 0 Hz  
SWP 20.0 msec

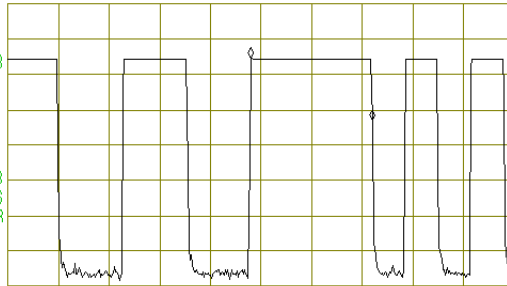

Plot for 4.8ms Pulse



MARKER  $\Delta$   
2.4500 msec  
-0.07 dB


ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR  $\Delta$  2.4500 msec  
-0.07 dB

LOG REF -15.0 dBm

10  
dB/  
ATN  
10 dB

WA SB  
SC FS  
CORR

CENTER 433.513 MHz  
#IF BW 1.0 MHz  
AVG BW 300 kHz  
#SWP 20.0 msec

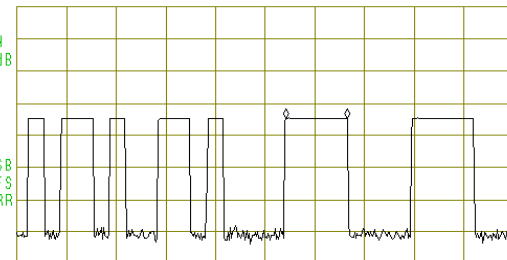

Plot for 2.5ms Pulse



MARKER  $\Delta$   
650.00  $\mu$ sec  
-6.58 dB


ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR  $\Delta$  650.00  $\mu$ sec  
-6.58 dB

LOG REF -15.0 dBm


10  
dB/  
ATN  
10 dB

WA SB  
SC FS  
CORR

CENTER 433.480 MHz  
IF BW 120 kHz  
AVG BW 300 kHz  
SPAN 0 Hz  
SWP 20.0 msec

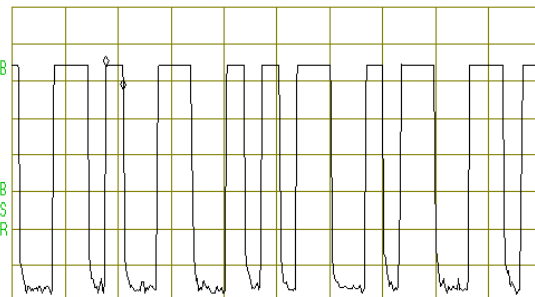

Plot for 0.640ms Pulse



## **7. PHOTOS OF TESTED EUT**

The following photos show the inside details of the EUT.