

W-CDMA test report for NMM-1

Report Date: March 30, 2004

Signatures:

Tested by: 

Marko Turkkila Testing Engineer

Contents approved: 

Tomi Nyberg Laboratory Manager

CONTENTS

1	LABORATORY INFORMATION	3
2	CUSTOMER INFORMATION	3
3	SUMMARY OF TEST RESULTS.....	4
4	EUT INFORMATION	5
4.1	EUT description.....	5
5	EUT TEST SETUPS	6
6	APPLICABLE STANDARDS.....	6
7	RADIATED RF OUTPUT POWER.....	7
7.1	Test setup	7
7.2	Test method.....	8
7.3	EUT operation mode.....	8
7.4	Limit.....	8
7.5	Results.....	9
8	99% OCCUPIED BANDWIDTH.....	11
8.1	Test setup	11
8.2	EUT operation mode.....	11
8.3	Results.....	12
8.4	Screen shots	13
9	BAND-EDGE COMPLIANCE.....	14
9.1	Test setup	14
9.2	EUT operation mode.....	14
9.3	Limit.....	14
9.4	Results.....	14
9.5	Screen shots	14
10	RADIATED SPURIOUS EMISSIONS	14
10.1	Test setup	14
10.2	Test method.....	14
10.3	EUT operation mode.....	14
10.4	Limit.....	14
10.5	Results.....	14
11	TEST EQUIPMENT	14
11.1	Conducted measurements.....	14
11.2	Radiated measurements.....	14
12	TEST SETUP PHOTOGRAPHS	14

1 LABORATORY INFORMATION

Test Laboratory	NORDIC ACCREDITED TESTING LABORATORIES OY EMC Laboratory Koneenkatu 12 / K17 05830 Hyvinkää FINLAND Tel: +358 20 475 2600 Fax: +358 20 475 2719 e-mail: firstname.surname@ette.com
FCC registration number: IC file number:	910391 (January 27, 2003) IC 4616 (May 14, 2003)

2 CUSTOMER INFORMATION

Client	Nokia Corporation Keilalahdentie 2-4 02150 Espoo PL 226 00045 NOKIA GROUP Tel: 07180 08000
Contact person:	Reija Moisio Nokia Corporation / TCC Salo P.O. Box 86 (Joensuunkatu 7E / Kiila 1B) FIN -24101 SALO FINLAND Tel: +358 7180 08000 Fax: +358 7180 44123
Receipt of EUT:	March 11, 2004
Testing date:	March 11 – 29, 2004
Report date:	March 30 2004

The tests listed in this report have been done to demonstrate compliance with the applicable requirements in FCC rules Part 24 and 2 and IC standard RSS-133.

3 SUMMARY OF TEST RESULTS

Section in CFR 47	Section in RSS-133	Test	Result
§2.1046 (a)	6.2	Conducted RF output	-
§24.232 (b)	6.2	Radiated RF output	PASS
§2.1049 (h)	5.6	99% occupied bandwidth	PASS
§24.238 (a)	6.3	Block-edge compliance	PASS
§24.238 (a), §2.1051	6.3	Spurious emissions at antenna terminals	-
§24.238 (a), §2.1053	6.3	Radiated spurious emissions	PASS
§24.235, §2.1055 (a)(1)(b)	7	Frequency stability, temperature variation	-
§24.235, §2.1055 (d)(1)(2)	7	Frequency stability, voltage variation	-

PASS Pass

FAIL Fail

X Measured, but there is no applicable performance criteria

- Not done

4 EUT INFORMATION

The EUT and accessories used in the tests are listed below. Later in this report only EUT numbers are used as reference.

	Device	Type	S/N	EUT number
EUT	W-CDMA Mobile phone	NMM-1	001004/00/171665/4	17001
	W-CDMA Mobile phone	NMM-1	001004/00/171642/3	17002
	W-CDMA Mobile phone	NMM-1	001004/00/171678/7	17003
Accessories	Battery	BLC-2		17004

Notes: -

4.1 EUT description

EUT is a GSM 1900 mobile phone with BT and W-CDMA functions.

The EUT was not modified during the tests.

5 EUT TEST SETUPS

For each test the EUT was exercised to find out the worst case of operation modes and device configuration.

The test setup photographs are in the document referenced in section 12.

6 APPLICABLE STANDARDS

The tests were performed in guidance of CFR 47 part 24, part 2, ANSI/TIA/EIA-603-A-2001 and RSS-133.

Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method" for each test case.

7 RADIATED RF OUTPUT POWER

EUT	17003		
Accessories	17004		
Temp, Humidity, Air Pressure	21 °C	44 RH%	1018 hPa
Date of measurement	March 27, 2004		
FCC rule part	§24.232 (b)		
RSS-133 section	6.2		
Measured by	Marko Turkkila		

7.1 Test setup


The EUT was set on a non-conductive turntable in a semi-anechoic chamber. In the corner of the chamber there was a communications antenna, which was connected to the BS simulator located outside the chamber.

The radiated power from the EUT was measured with an antenna fixed to an antenna tower. Antenna polarization and height can be changed remotely. The turntable is remotely controlled to turn the EUT

The EUT was set at 0.8m height. Measuring antenna was scanned 1 – 4 m in height.

The measured signal was routed from the measuring antenna to the spectrum analyzer.

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

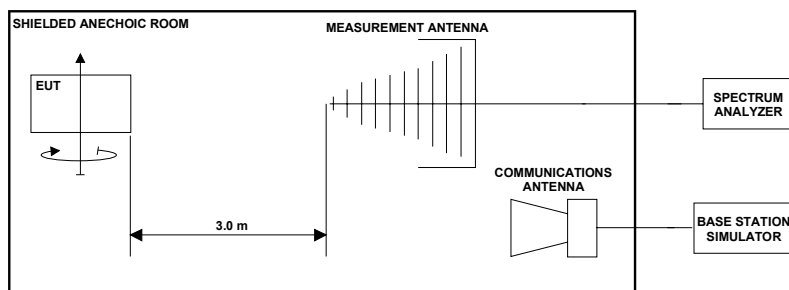

Picture 1: Test setup for radiated RF output power measurement

7.2 Test method

1. Substitution method calibration was made for determining correction factors for horizontal and vertical polarization. In the calibration the EUT was substituted with a signal generator and antenna, which gain over isotropic and dipole radiator was known.
2. The maximum power level was searched by moving the turntable, by manipulating the EUT and by changing the measurement antenna polarization and height. The maximum measured level (P_{EUT}) was recorded.
3. The measured power from EUT was corrected with the correction factor in an automated test system to give the EUT EIRP.

7.3 EUT operation mode

EUT operation mode	Test loop mode 2
EUT channel	9262, 9400, 9538
EUT TX power level	Max TX power level was set with TPC power control bit pattern "All 1"

7.4 Limit

EIRP [W]	
FCC	≤ 2
IC	≤ 2

7.5 Results

The formula below was used to calculate the EIRP of the EUT.

$$P_{EIRP[W]} = \frac{10^{(P_{EUT[dBm]} + (P_{Subst_RX[dBm]} - P_{Subst_TX[dBm]} + L_{Cable[dB]} - G_{Substitute_antenna[dBi]})) / 10}}{1000}$$

$$= \frac{10^{(P_{EUT[dBm]} + CF[dB]) / 10}}{1000}$$

where the variables are as follows:

$P_{EUT [dBm]}$	Measured power level (from step 2 in 7.2) from the EUT
$P_{Subst_TX [dBm]}$	Power (step 1 in 7.2) fed to the substituting antenna
$P_{Subst_RX [dBm]}$	Power (step 1 in 7.2) received with the spectrum analyzer
$G_{Substitute_antenna [dBi]}$	Gain of the substitutive antenna over isotropic radiator
$L_{Cable [dB]}$	Loss of the cable between signal generator and the substituting antenna
$CF [dB]$	Correction factor combined from the $P_{Subst_TX [dBm]}$, $P_{Subst_RX [dBm]}$, $G_{Substitute_antenna [dBi]}$ and $L_{Cable [dB]}$ used in the automated measurement system (step 3 in 7.2).

In the tables below, the abbreviated column titles are:

EUT H / H2 / V	EUT orientation, Horizontal / Horizontal 2 / Vertical
Pol H / V	Measuring antenna polarization, Horizontal / Vertical
Height [m]	Measuring antenna height from reference ground in meters
TT [deg]	Turn table angle in degrees

Table 1: Radiated RF output power measurement results, W-CDMA.


EUT Channel	P _{EUT} [dBm]	CF [dB]	EIRP [dBm]	EIRP [W]	EUT H / V /H2	Pol. H / V	Height [m]	TT [deg]
9262	-20.45	43.20	22.75	0.19	H	H	1.20	27.0
9400	-19.29	43.32	24.03	0.25	H	H	1.17	24.0
9538	-19.69	43.53	23.84	0.24	H	H	1.14	29.0

8 99% OCCUPIED BANDWIDTH

EUT	17001		
Accessories	17004		
Temp, Humidity, Air Pressure	21 °C	41 RH%	1028 hPa
Date of measurement	March 13, 2004		
FCC rule part	§2.1049 (h)		
RSS-133 section	5.6		
Measured by	Kimmo Aarnio		

8.1 Test setup

The BS simulator was used to set the TX channel, power level and to establish data communication with EUT.

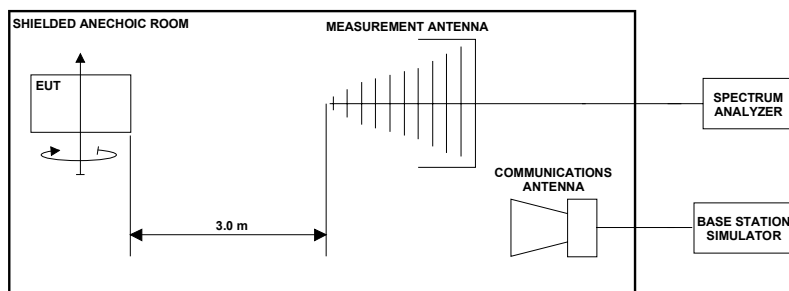

Picture 2: Test setup for band edge compliance measurement

99% occupied bandwidth measurements were made as radiated measurement similar to radiated power measurement. The worst turntable angle, antenna height and antenna polarisation found in radiated power measurements were used.

Base station simulator was used to set the EUT channel, modulation and power level.

8.2 EUT operation mode

EUT operation mode	Test loop mode 2
EUT channel	9262, 9400, 9538
EUT TX power level	Max TX power level was set with TPC power control bit pattern "All 1"

8.3 Results

The 99% occupied bandwidth was calculated from spectrum analyzer measurements.

The measurement data was read from the analyzer to computer.


Software in computer calculated the total power from the measurement data and defined the frequency band containing 99% of the total power.

Markers in the spectrum analyzer were then placed between the calculated frequencies to show the calculated 99% power band in the screenshots.


Table 2: 99% occupied bandwidth measurement results, W-CDMA

EUT Channel	99% occupied bandwidth [kHz]
9262	4136
9400	4126
9538	4076


8.4 Screen shots

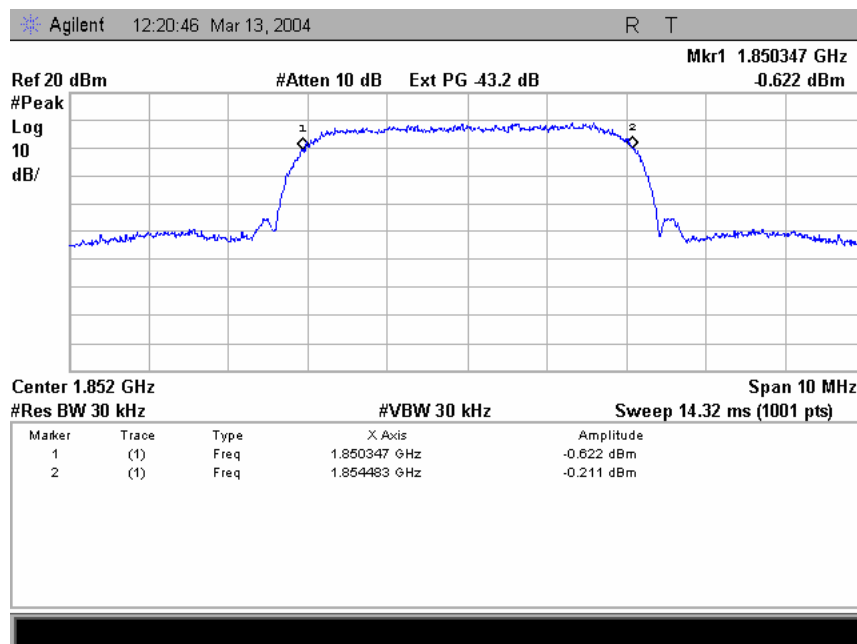

Picture 3: 99% occupied bandwidth, W-CDMA channel 9262

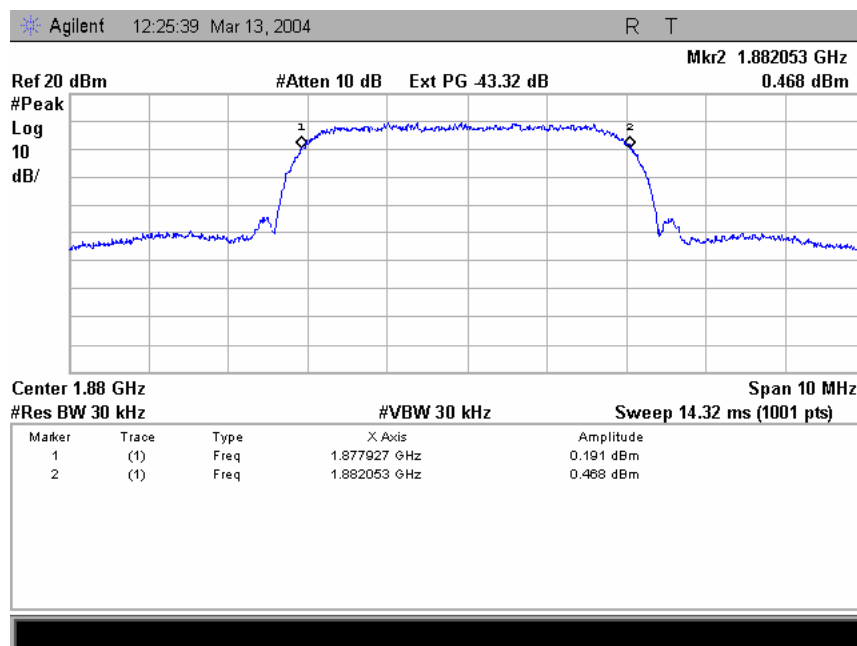

Picture 4: 99% occupied bandwidth, W-CDMA channel 9400.

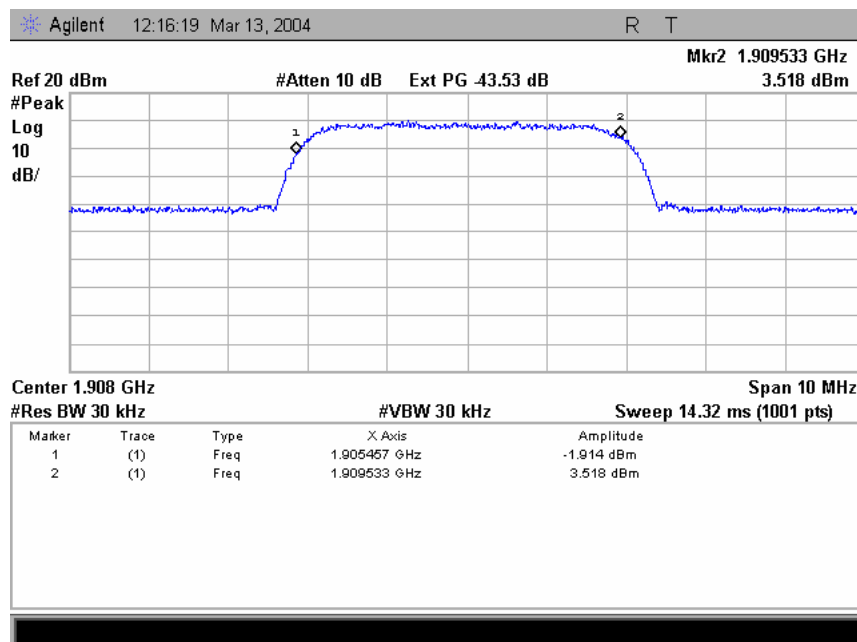


Picture 5: 99% occupied bandwidth, W-CDMA channel 9538

9 BAND-EDGE COMPLIANCE

EUT	17003		
Accessories	17004		
Temp, Humidity, Air Pressure	21 °C	42 RH%	1021 hPa
Date of measurement	March 29, 2004		
FCC rule part	§24.238 (a)		
RSS-133 section	6.3		
Measured by	Marko Turkkila		

9.1 Test setup

The BS simulator was used to set the TX channel, power level and to establish data communication with EUT.

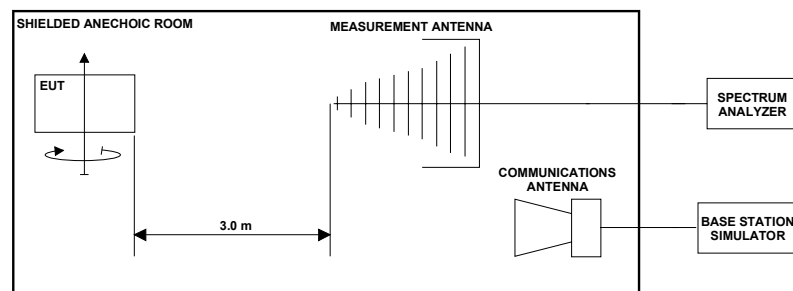

Picture 6: Test setup for band edge compliance measurement

Band edge power measurements were made as radiated measurement similar to radiated power measurement. The worst turntable angle, antenna height and antenna polarisation found in radiated power measurements were used.

Base station simulator was used to set the EUT channel, modulation and power level.

Power level at the band edge was measured with spectrum analyzer. Measured reading was corrected in the spectrum analyzer by setting correction factor calculated in radiated power measurement section (7.5), as offset.

9.2 EUT operation mode

EUT operation mode	Test loop mode 2
EUT channel	9262, 9538
EUT TX power level	Max TX power level was set with TPC power control bit pattern "All 1"

9.3 Limit

Frequency [MHz]	Level [dBm]
<1850	-13
>1910	-13


9.4 Results

The line in the screen shots is the -13dBm limit line. The results were corrected with “offset” value described in test setup section.


Table 3: Band edge compliance measurement results, W-CDMA

EUT Channel	Offset [dB]	Band edge power [dBm]	Antenna Height	Antenna Pol.	EUT Orient.	Turn table Angle
9262	43.20	-25.03	1.20	H	H	27
9538	43.53	-25.71	1.14	H	H	29

9.5 Screen shots

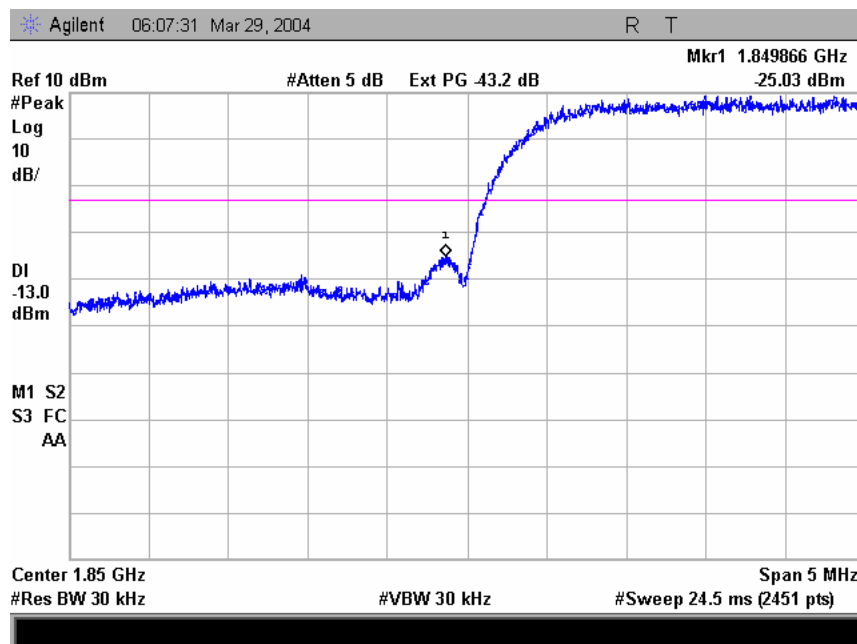

Picture 7: W-CDMA, channel 9262

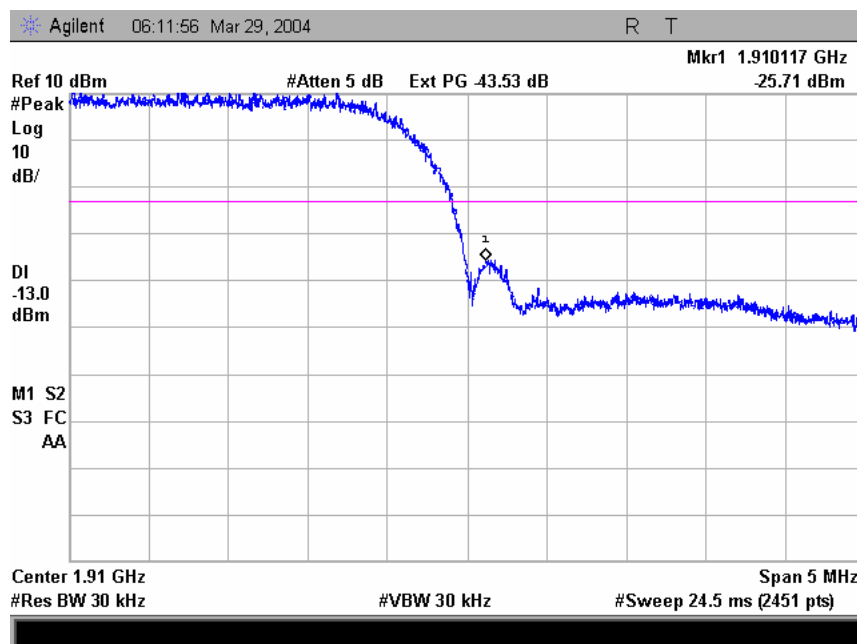

Picture 8: W-CDMA, channel 9538

10 RADIATED SPURIOUS EMISSIONS


EUT	17002		
Accessories	17004		
Temp, Humidity, Air Pressure	22 °C	43 RH%	1008 hPa
Date of measurement	March 18, 2004		
FCC rule part	§24.238 (a), §2.1053		
RSS-133 section	6.3		
Measured by	Kimmo Aarnio		

10.1 Test setup


Band reject and high pass filters was used to prevent overloading the spectrum analyzer and preamplifier.

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

The test was done using an automated test system, where the measurement equipment was controlled by a computer.

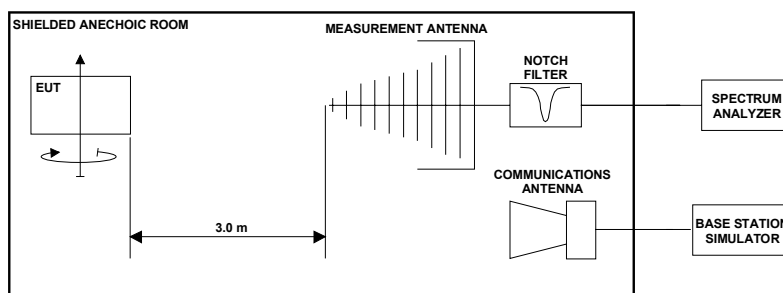

Picture 9: Test setup for radiated spurious emissions measurement on below 3 GHz frequencies

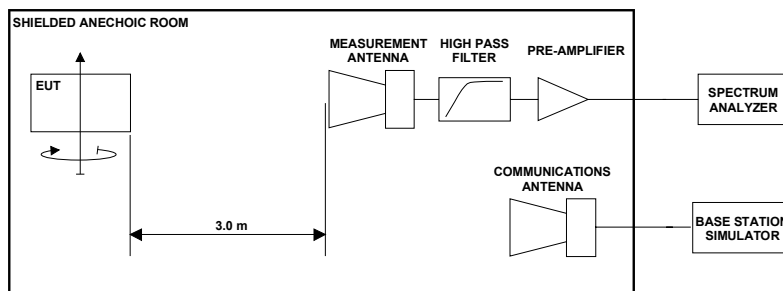

Picture 10: Test setup for radiated spurious emissions measurement on 3 GHz and above frequencies

10.2 Test method

1. The emissions were searched and maximized by moving the turntable, changing the measuring antenna polarization and height.
2. Levels of suspicious signals and levels of EUT transmitter harmonics were recorded.
3. The recorded levels were corrected in the automated test system with the correction factor given by a substitution calibration made before the measurements. The calibration is made separately for vertical and horizontal polarization and the system uses different correction factors depending on the measuring antenna polarization.
4. The corrected values, giving the EUT radiated spurious emission levels as e.i.r.p, are reported.

10.3 EUT operation mode

EUT operation mode	Test loop mode 2
EUT channel	9400
EUT TX power level	Max TX power level was set with TPC power control bit pattern "All 1"

10.4 Limit

Frequency [MHz]	Level [dBm]
30 – 19100	-13

10.5 Results

The formula below was used to calculate the EIRP of the spurious emissions.

$$P_{Emission[dBm]} = P_{Measured[dBm]} + (P_{SubstRX[dBm]} - P_{SubstTX[dBm]} + L_{Cable[dB]} - G_{Antenna[dBi]})$$

$$= P_{Measured[dBm]} + CF_{[dB]}$$

where the variables are as follows:

$P_{Measured}$ [dBm]	Measured emission level (from step 2 in 10.2)
P_{Subst_TX} [dBm]	Signal generator power (from step 4 in 10.2) fed to the substituting antenna
P_{Subst_RX} [dBm]	Measured power (from step 4 in 10.2) in the substitution calibration
L_{Cable} [dB]	Loss of the cable between antenna and signal generator (from step 4 in 10.2)
$G_{Antenna}$ [dBi]	Gain of the substitutive antenna over isotropic radiator
$CF_{[dB]}$	Correction factor combined from the P_{Subst_TX} [dBm], L_{Cable} [dB] and $G_{Antenna}$ [dBi] used in the automated test software

Measurement system noise level was least 15 dB below the spurious emission limit. Only levels of suspicious signals and transmitter harmonic frequencies, which were above the measurement system noise, are reported.

In the tables below, the abbreviated column titles are:

f [MHz]	Measured frequency
EUT V	EUT orientation, Vertical
Pol H / V	Measuring antenna polarization, Horizontal / Vertical
Height [m]	Measuring antenna height from reference ground in meters
TT [deg]	Turn table angle in degrees

Table 4: Radiated spurious emission levels, W-CDMA channel 9400

f [MHz]	$P_{Measured}$ [dBm]	CF [dB]	$P_{Emission}$ [dBm]	EUT V	Pol. H / V	Height [m]	TT [deg]

*** All peaks were more than 25 dB under the limit.

11 TEST EQUIPMENT

All testing and measurement equipment has been calibrated once a year, except the antennas which are calibrated every two years.

11.1 Conducted measurements

Equipment	Manufacturer	Model
Spectrum Analyzer	Agilent	E7405A
W-CDMA Base station simulator	Anritsu	MT8820A
Signal Generator	Rohde & Schwarz	SMR27
Attenuator 3 dB	Narda	779-3
Power splitter	Mini Circuits	ZFSC-2-4
Power splitter	Narda	4426-2
Temperature chamber	Finero	LK 540
DC power supply	Delta Elektronika	SM 120-13
Multimeter	Fluke	179

11.2 Radiated measurements

Equipment	Manufacturer	Model
Spectrum Analyzer	Agilent	E7405A
W-CDMA Base station simulator	Anritsu	MT8820A
Antenna	Chase	CBL 6140
Antenna	Schwarzbeck	BBHA 9120D
Antenna	Chase	CBL 6141
Antenna	EMCO	3115
Signal Generator	Rohde & Schwarz	SMR27
Tunable notch filter	Wainwright Instruments	WRCD 1700/2000-0.2/40-10EEK
Tunable notch filter	Wainwright Instruments	WRCT 800/960-0.2/40-8EEK
High pass filter	Wainwright Instruments	WHK3/18GST
High pass filter	Wainwright Instruments	WHK 2.1/18GST
Band Reject filter	Wainwright instruments	WRCT2400/2483-45/10EE
Pre-amplifier	JCA	118-400
Pre-amplifier	Agilent	87405B
Turn table / antenna mast controller	EMCO	2090
Antenna mast	EMCO	2075-2

12 TEST SETUP PHOTOGRAPHS

Test setup photographs can be found in a separate document

T04-017B-EMC_PHOTOS.doc