


DXS-600

SUPERVISED LONG RANGE CONVERTIBLE TRANSMITTER

Operation Instructions

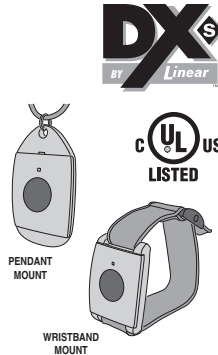

NORTEK
SECURITY & CONTROL
USA & Canada (800) 421-1587 & (800) 392-0123
(760) 438-7000 - Toll Free FAX (800) 468-1340
www.nortekcontrol.com

PRODUCT DESCRIPTION

The Model DXS-600 is a battery powered, miniature, water-resistant*, supervised transmitter designed for use with Linear's PERS Consoles and DX or DXS Format receivers.

The transmitter is supplied in the pendant configuration with an adjustable lanyard with a breakaway release. An optional wristband mount is also included. **WARNING! After snapping the transmitter into the wristband mount, do not attempt to remove the unit from the wristband mount or damage may result.** Pressing the button on the transmitter sends a digitally coded wireless signal to its companion Console. To insure sending a complete signal, press the transmitter button for a minimum of two seconds.


The DXS-600 transmitter is factory set to a unique code, so no field coding is required. When its button is pressed, the transmitter can send a signal for up to 30 seconds per activation. The signal indicator on the transmitter lights green when the unit is activated. Consoles must be programmed to the transmitter's code before system testing and operation. Refer to the Console's instructions for details on programming.

After the first activation, the transmitter will send a status signal every two hours. Every two hours the transmitter also tests for a low battery. If the battery tests low, a low battery signal is sent. If the transmitter is activated with a low battery, the signal indicator will light red.

The transmitter is sealed to provide water-resistance. The unit's battery is not replaceable. The transmitter should be discarded at the end of its battery life.

* **NOTE: Water resistance not tested by UL**

OPTIONS & FEATURES

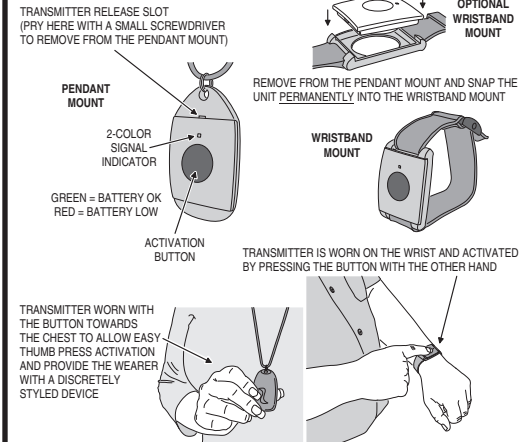

ENABLING STATUS & PROGRAMMING

ACTIVATE THE TRANSMITTER TO PERMANENTLY
ENABLE STATUS REPORTING

THE INDICATION THAT STATUS REPORTS ARE BEING
SENT IS THE SIGNAL INDICATOR BLINKING 3 TIMES
AFTER EACH TRANSMITTER ACTIVATION

INSTRUCTIONS FOR
THE INSTALLER


PROGRAM THE TRANSMITTER INTO THE CONSOLE BY PLACING THE
CONSOLE INTO PROGRAM MODE, THEN SEND A SIGNAL TO THE
CONSOLE FROM THE TRANSMITTER. REFER TO THE UL LISTED
PERS-2400B, PERS-3600B, OR PERS-4200 CONSOLE'S
PROGRAMMING INSTRUCTIONS FOR DETAILS.

SYSTEM TESTING

IMPORTANT ! TEST SYSTEM WEEKLY !

THE MANUFACTURER STRONGLY RECOMMENDS THAT YOU TEST THIS
EQUIPMENT FREQUENTLY. OVER A PERIOD OF TIME, NO ELECTRONIC
PRODUCT IS BETTER THAN THE INSPECTION AND MAINTENANCE IT
RECEIVES. THEREFORE, FROM THE TIME OF INSTALLATION, IT IS
ABSOLUTELY NECESSARY TO TEST THE SYSTEM AT LEAST ONCE A WEEK.

PLACE THE CONSOLE IN "TEST"
MODE AND ACTIVATE THE
TRANSMITTER. VERIFY THAT THE
SIGNAL WAS RECEIVED AND THAT
THE SYSTEM REPORTS AS
REQUIRED.



IF THE SIGNAL INDICATOR LIGHTS
RED, THE BATTERY IS LOW AND
THE TRANSMITTER NEEDS TO BE
REPLACED

LIMITED WARRANTY

This Nortek Security & Control product is warranted against defects in material and workmanship for twenty four (24) months. **This warranty extends only to wholesale customers** who buy direct from Nortek Security & Control or through Nortek Security & Control's normal distribution channels. Nortek Security & Control does not warrant this product to consumers. Consumers should inquire from their selling dealer as to the nature of the dealer's warranty, if any. **There are no obligations or liabilities on the part of Nortek Security & Control LLC for consequential damages arising out of or in connection with use or performance of this product or other indirect damages with respect to loss of property, revenue, or profit, or cost of removal, installation, or reinstallation.** All implied warranties, including implied warranties for merchantability and implied warranties for fitness, are valid only until the warranty expires. **This Nortek Security & Control LLC Warranty is in lieu of all other warranties express or implied.**

All products returned for warranty service require a Return Product Authorization Number (RPA#). Contact Returns at 1-855-546-3351 for an RPA# and other important details.

IMPORTANT !!! Radio controls provide a reliable communications link and fill an important need in portable wireless signaling. However, there are some limitations which must be observed.

- For U.S. installations only: The radios are required to comply with FCC Rules and Regulations as Part 15 devices. As such, they have limited transmitter power and therefore limited range.
- A receiver cannot respond to more than one transmitted signal at a time and may be blocked by radio signals that occur on or near their operating frequencies, regardless of code settings.
- Infrequently used radio links should be tested regularly to protect against undetected interference or fault.
- A general knowledge of radio and its vagaries should be gained prior to acting as a wholesale distributor or dealer, and these facts should be communicated to the ultimate users.

This device complies with part 15 of the FCC Rules and Industry Canada license exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment. Les changements ou modifications non approuvés expressément par la partie responsable de la conformité pourraient annuler l'autorité de l'utilisateur à faire fonctionner l'équipement.

Copyright © 2015 Nortek Security & Control LLC

10004591 X3