

Appendix B

Detailed Test Results

1. GSM
GSM850 for Head & Body
GSM1900 for Head & Body
2. WCDMA
WCDMA Band II for Head & Body
WCDMA Band IV for Head & Body
WCDMA Band V for Head & Body
3. LTE
LTE Band 2 for Head & Body
LTE Band 4 for Head & Body
LTE Band 5 for Head & Body
LTE Band 7 for Head & Body
LTE Band 12 for Head & Body
LTE Band 17 for Head & Body
LTE Band 38 for Head & Body
LTE Band 41 for Head & Body
LTE Band 66 for Head & Body
4. 5G NR
NR Band n5 for Head & Body
NR Band n7 for Head & Body
NR Band n38 for Head & Body
NR Band n41 for Head & Body
NR Band n77 for Head & Body
5. WIFI
WIFI 2.4G for Head & Body
WIFI 5G for Head & Body
6. BT
BT for Head & Body

Test Laboratory: SGS-SAR Lab

M2012K11G GSM 850 GSM 190CH Right cheek Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, GSM Only Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.748$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.553 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.76 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.846 W/kg

SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.591 W/kg

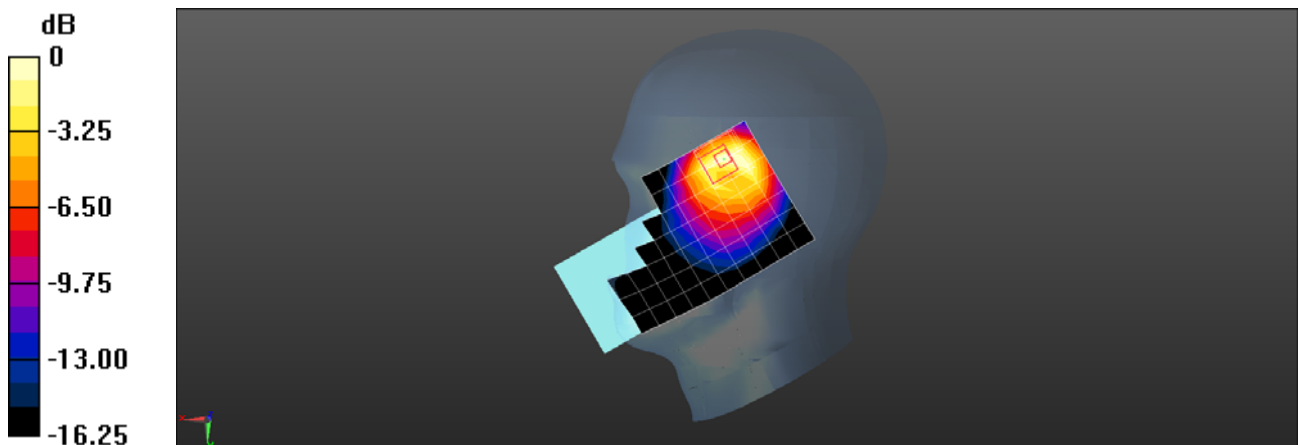

Test Laboratory: SGS-SAR Lab

M2012K11G GSM 850 GSM 190CH Back side 15mm Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, GSM Only Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.748$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.0931 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.774 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.0974 W/kg

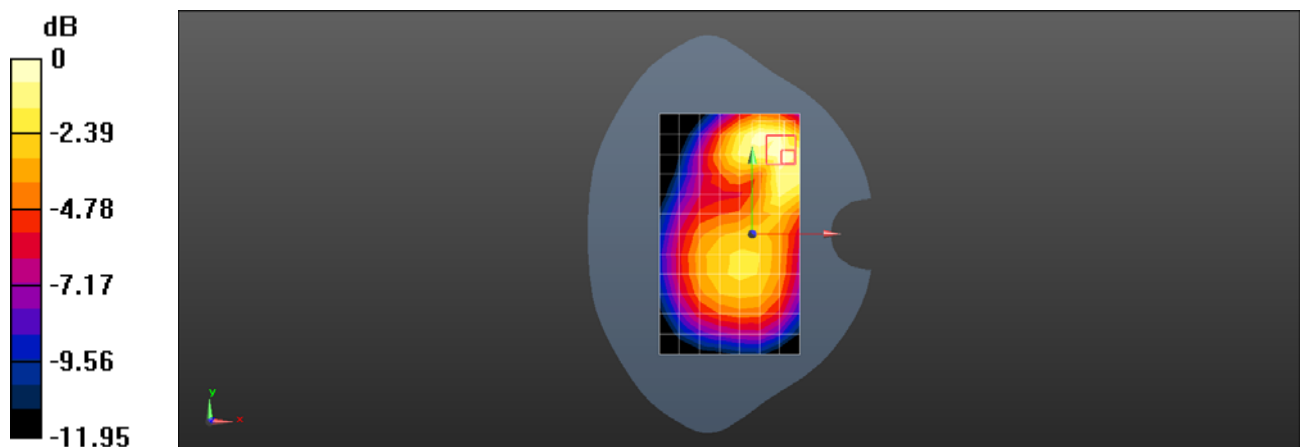

0 dB = 0.0974 W/kg = -10.11 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G GSM 850 GPRS 4TS 190CH Back side 10mm Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.748$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.138 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.030 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.166 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.134 W/kg

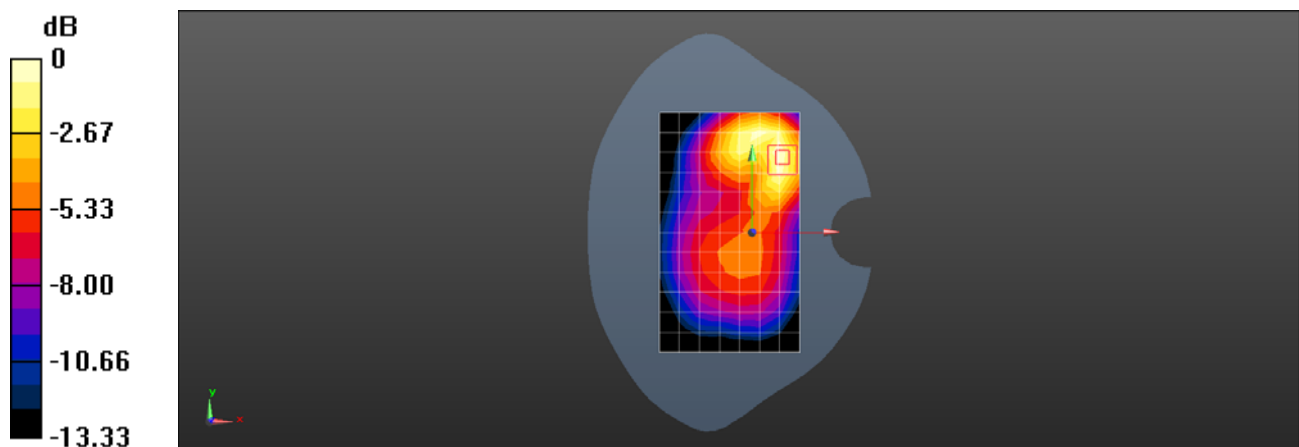

0 dB = 0.134 W/kg = -8.73 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G GSM 850 GSM 190CH Left cheek Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, GSM Only Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.748$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0773 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.284 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.0803 W/kg

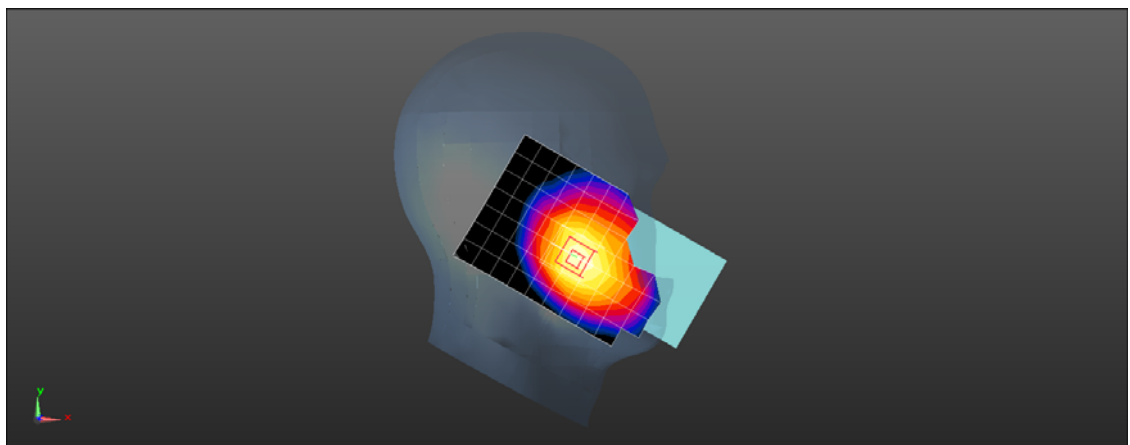

0 dB = 0.0803 W/kg = -10.95 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G GSM 850 GSM 190CH Back side 15mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, GSM Only Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.748$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.155 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.566 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.157 W/kg

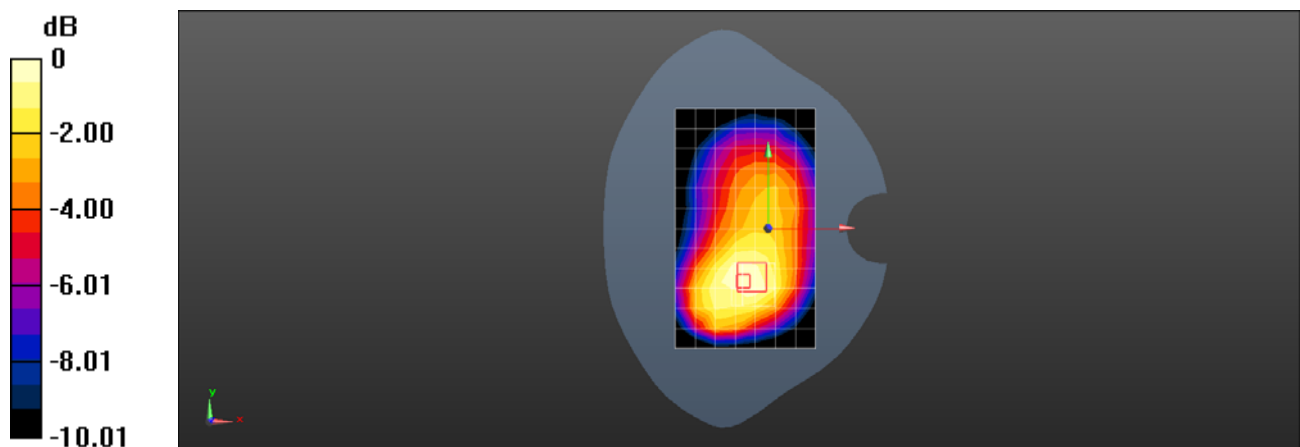

Test Laboratory: SGS-SAR Lab

M2012K11G GSM 850 GPRS 4TS 190CH Back side 10mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.748$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.260 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.36 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.278 W/kg

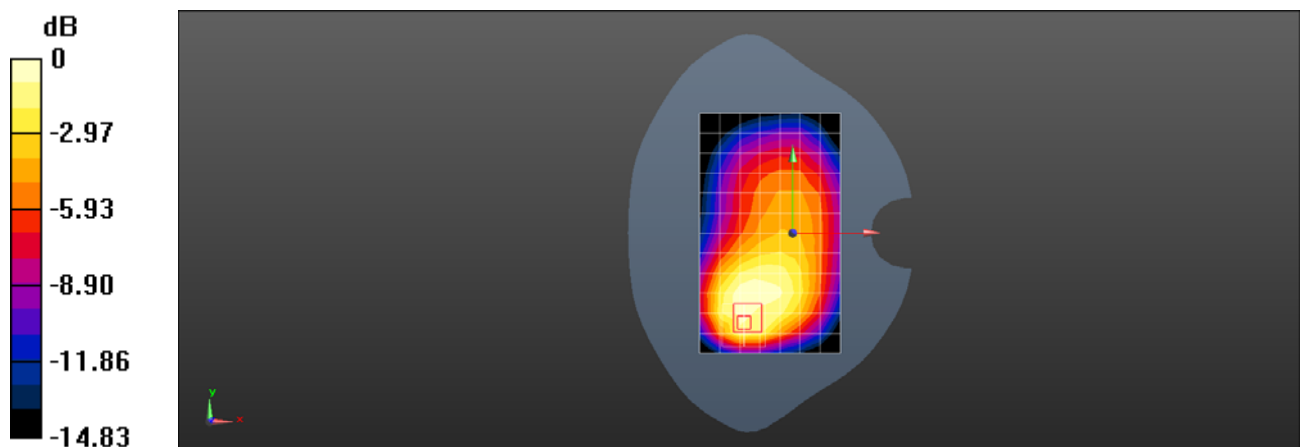

0 dB = 0.278 W/kg = -5.56 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G GSM 1900 GSM 661CH Left cheek Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026242

Communication System: UID 0, GSM Only Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.206$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0382 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.906 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0560 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0385 W/kg

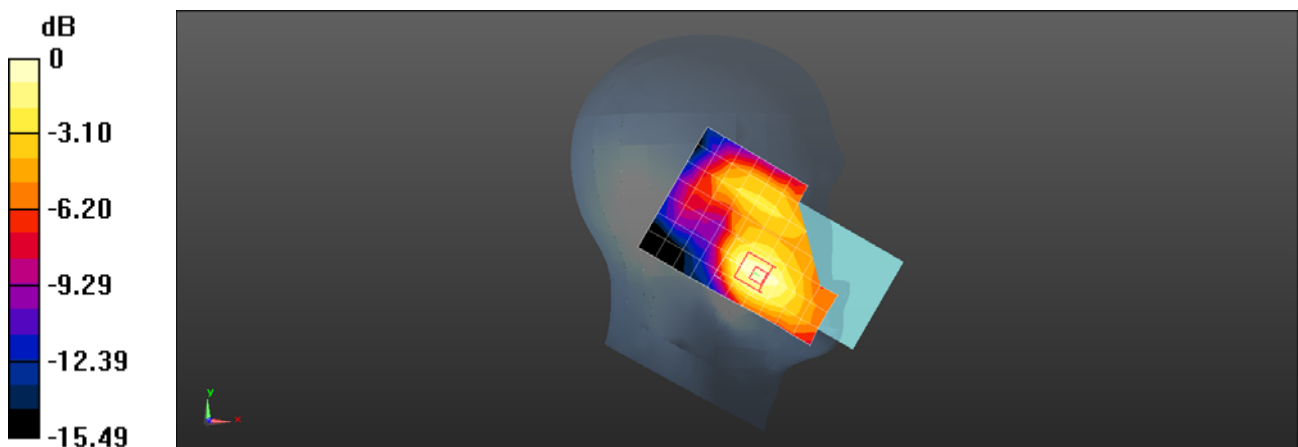

0 dB = 0.0385 W/kg = -14.15 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G GSM 1900 GSM 661CH Back side 15mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, GSM Only Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.206$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.177 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.899 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.255 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.170 W/kg

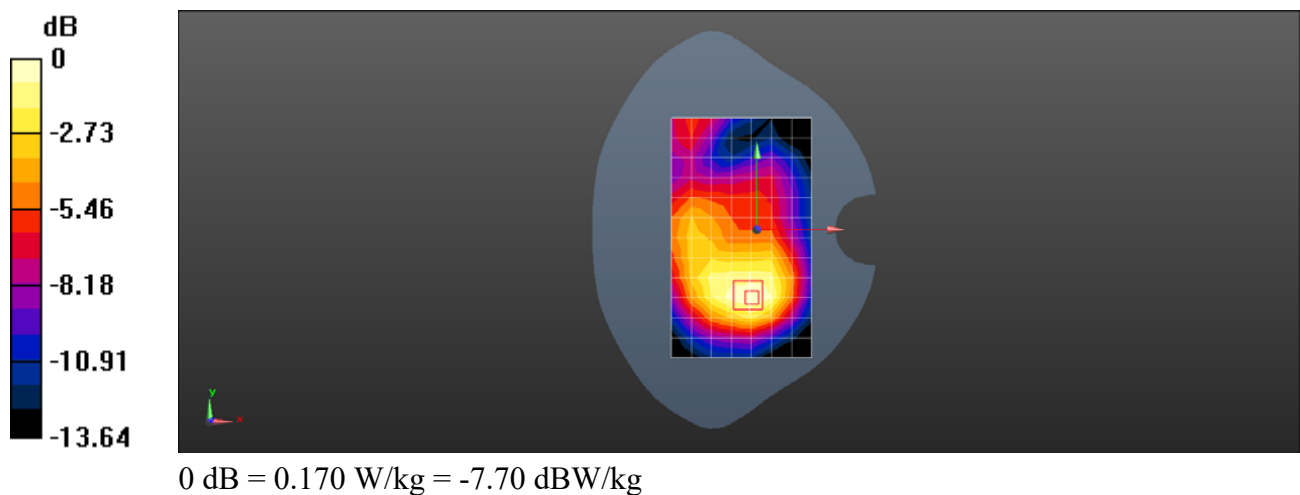

Test Laboratory: SGS-SAR Lab

M2012K11G GSM 1900 GPRS 4TS 661CH Bottom side 10mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.206$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.399 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.14 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.396 W/kg

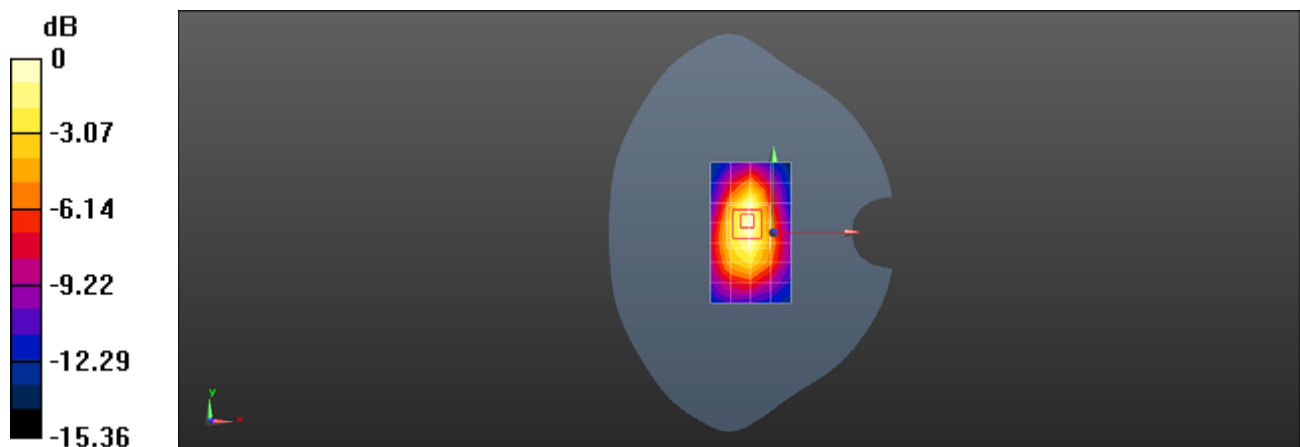

0 dB = 0.396 W/kg = -4.02 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G GSM 1900 GSM 661CH Right tilted Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, GSM Only Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.206$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.608 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.15 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.647 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 0.749 W/kg

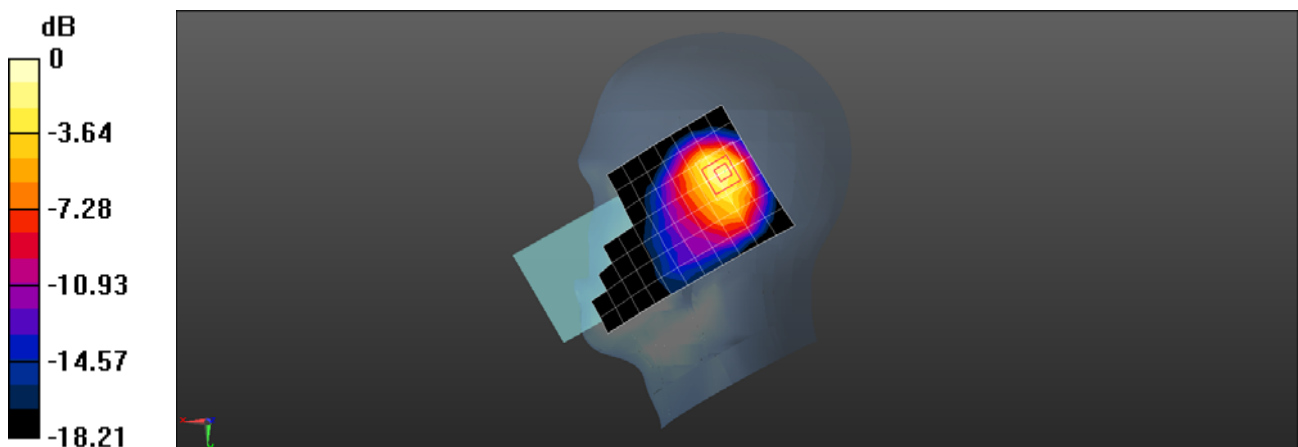

0 dB = 0.749 W/kg = -1.26 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G GSM 1900 GSM 661CH Back side 15mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, GSM Only Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.206$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.103 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.709 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.106 W/kg

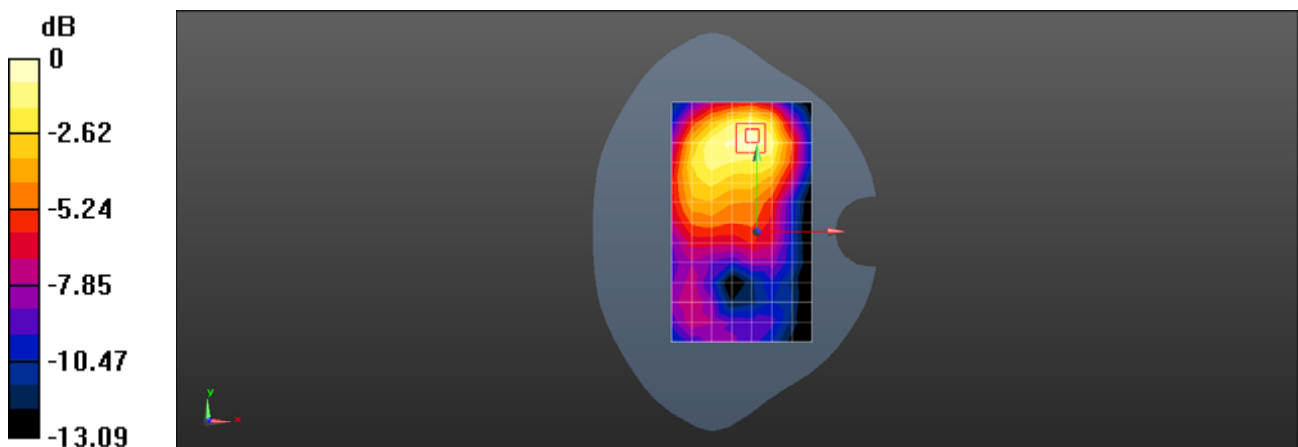

0 dB = 0.106 W/kg = -9.75 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G GSM 1900 GPRS 4TS 661CH Top side 10mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.206$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.250 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.65 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.269 W/kg

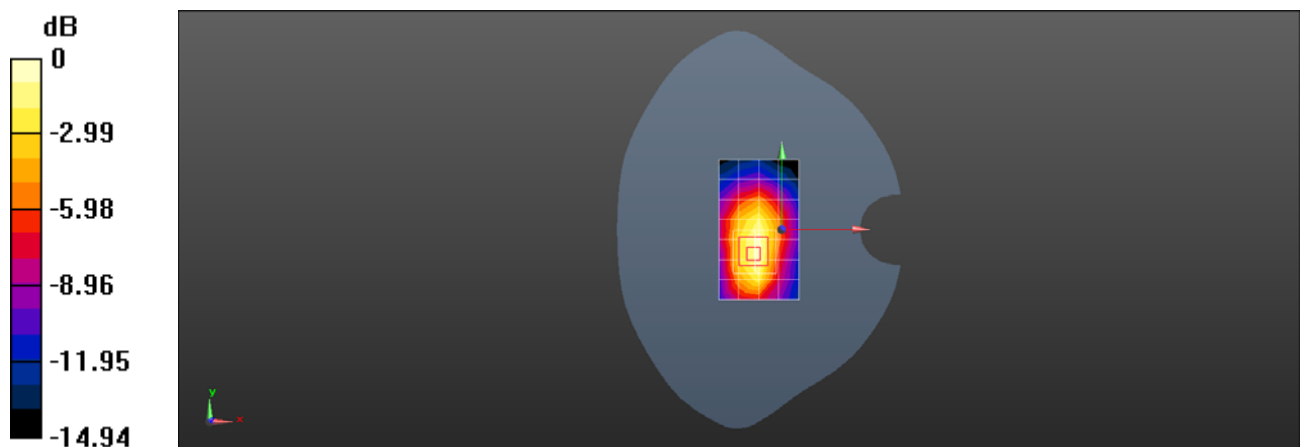

0 dB = 0.269 W/kg = -5.70 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band II 9400CH Right cheek Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.647$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.112 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.417 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.113 W/kg

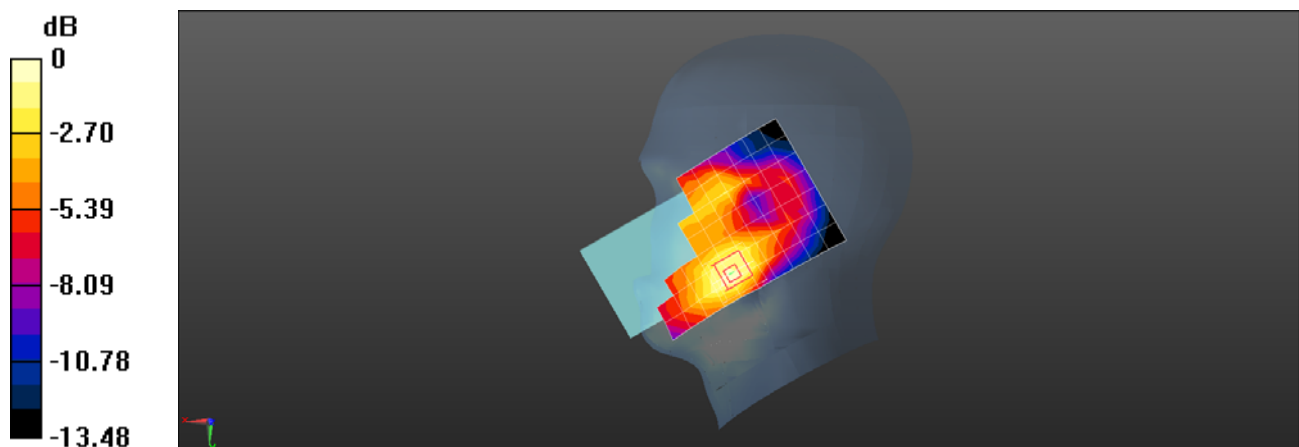

0 dB = 0.113 W/kg = -9.47 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band II 9400CH Back side 15mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.647$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.448 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.072 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.665 W/kg

SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.451 W/kg

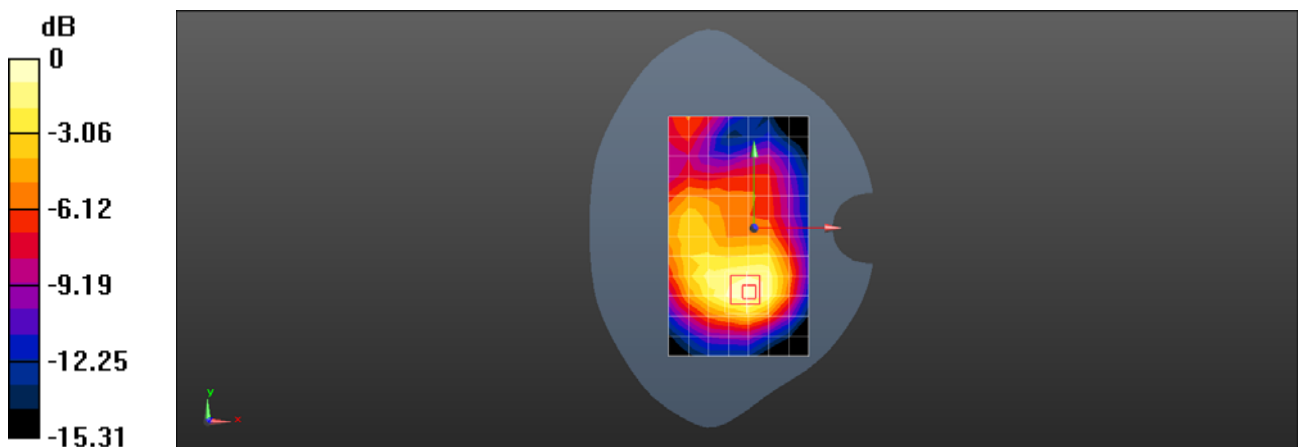

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band II 9400CH Bottom side 10mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.647$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.851 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.75 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.773 W/kg; SAR(10 g) = 0.426 W/kg

Maximum value of SAR (measured) = 0.862 W/kg

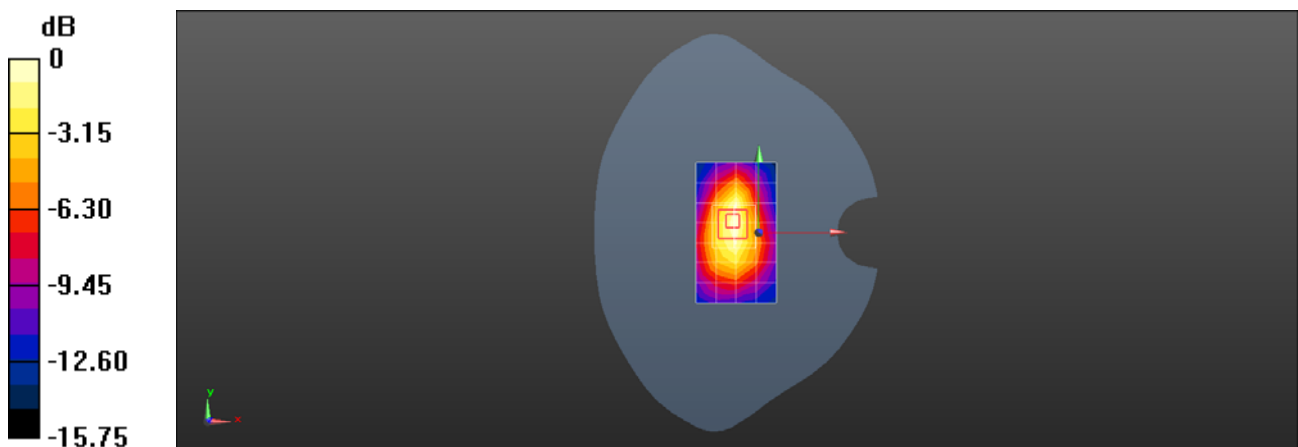

0 dB = 0.862 W/kg = -0.64 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band II 9400CH Right tilted Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.647$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.572 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.11 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.751 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 0.888 W/kg

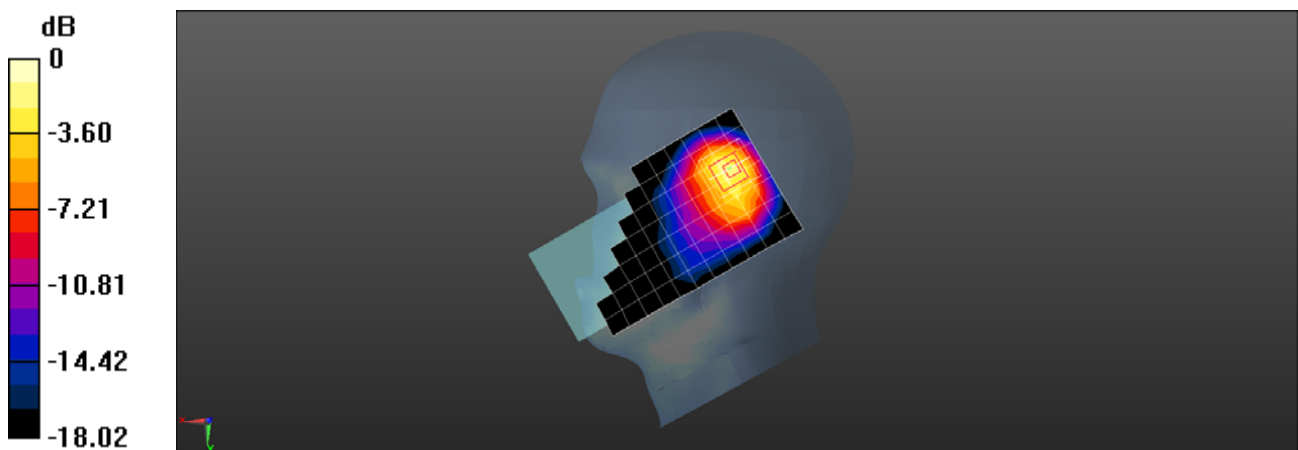

0 dB = 0.888 W/kg = -0.52 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band II 9400CH Back side 15mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.647$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.266 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.201 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.279 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.307 W/kg

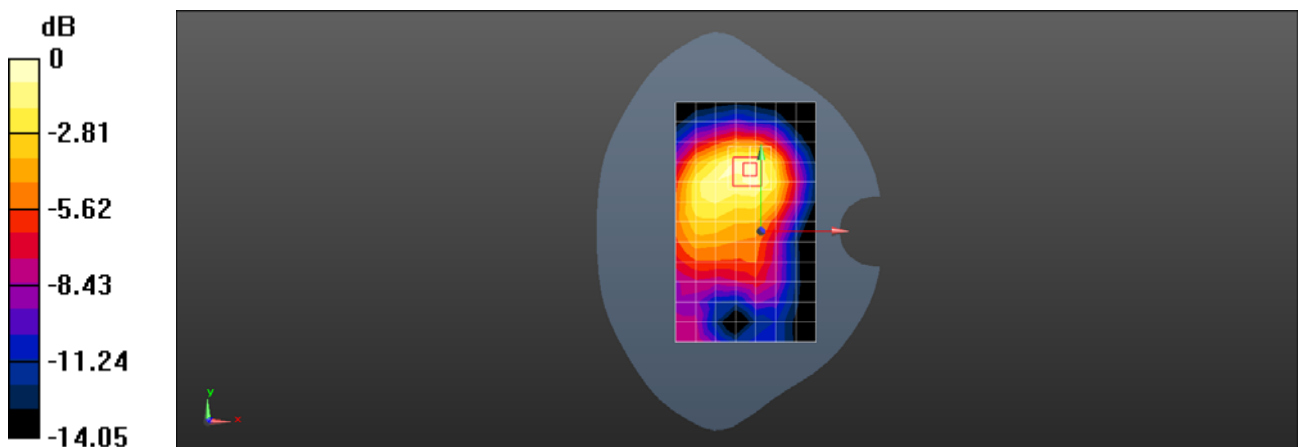

0 dB = 0.307 W/kg = -5.13 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band II 9400CH Top side 10mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.647$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.263 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.92 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.302 W/kg

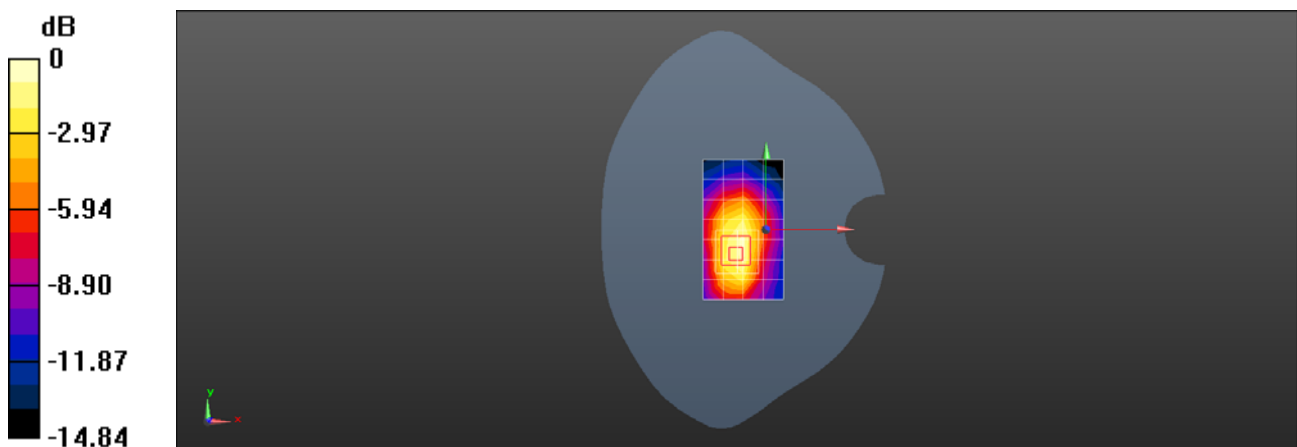

0 dB = 0.302 W/kg = -5.20 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band IV 1412CH Right cheek Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.3$ S/m; $\epsilon_r = 40.28$;

$\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0586 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.822 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0595 W/kg

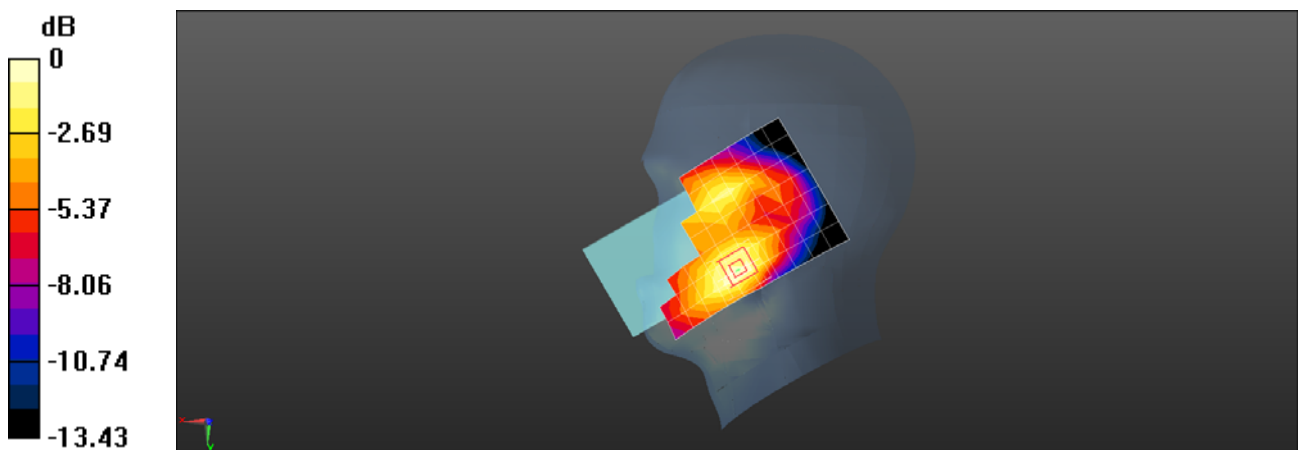

0 dB = 0.0595 W/kg = -12.25 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band IV 1412CH Back side 15mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.3$ S/m; $\epsilon_r = 40.28$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.199 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.450 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.193 W/kg

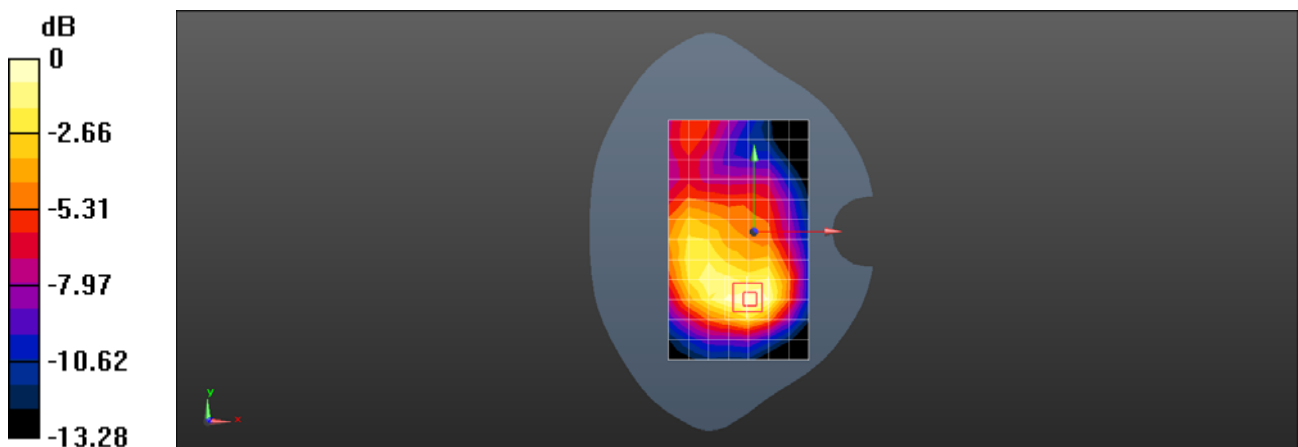

0 dB = 0.193 W/kg = -7.14 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band IV 1412CH Bottom side 10mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.3$ S/m; $\epsilon_r = 40.28$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.451 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.43 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.664 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.448 W/kg

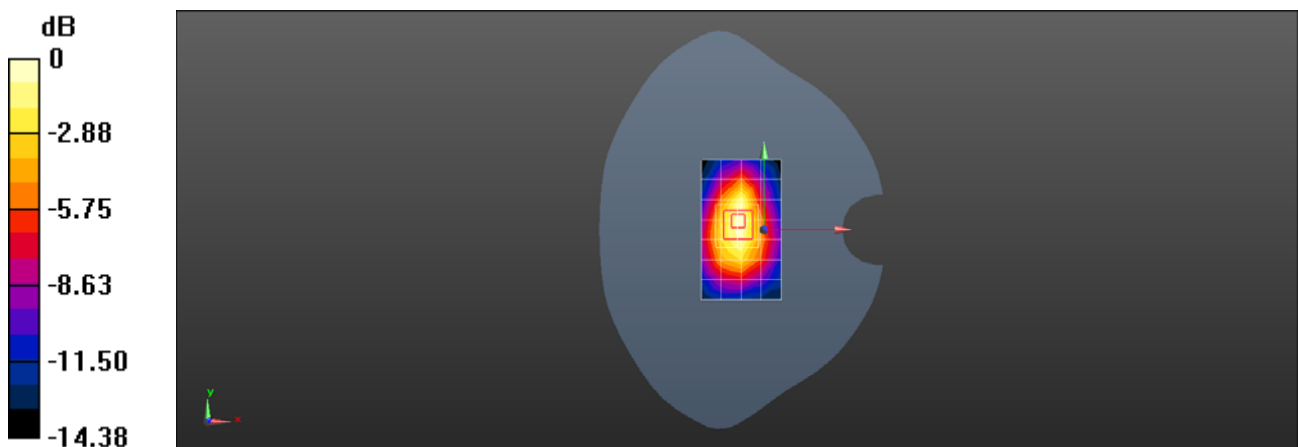

0 dB = 0.448 W/kg = -3.49 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band IV 1412CH Right tilted Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.3$ S/m; $\epsilon_r = 40.28$;

$\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.530 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.13 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.697 W/kg; SAR(10 g) = 0.361 W/kg

Maximum value of SAR (measured) = 0.813 W/kg

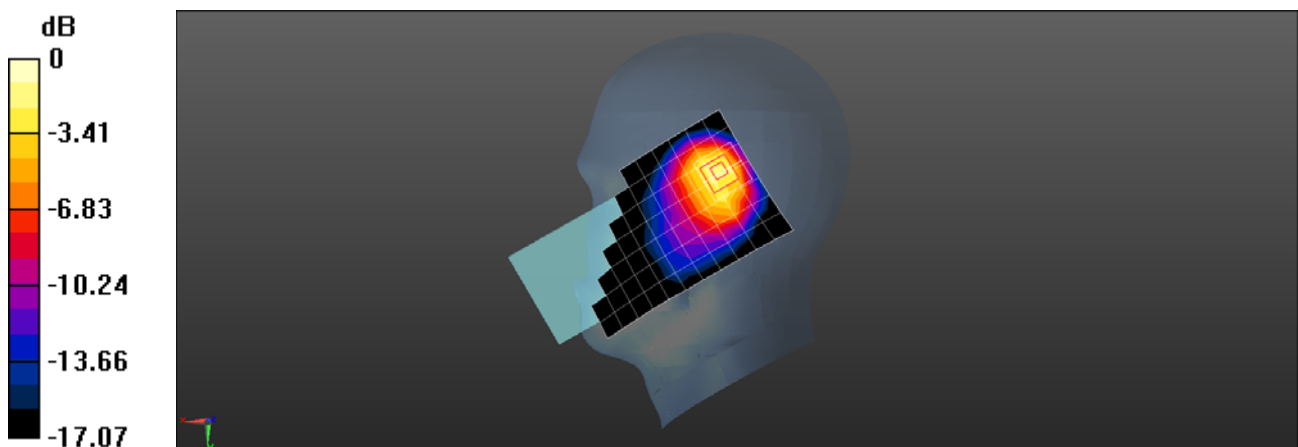

0 dB = 0.813 W/kg = -0.90 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band IV 1412CH Back side 15mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.3$ S/m; $\epsilon_r = 40.28$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.339 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.83 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.346 W/kg

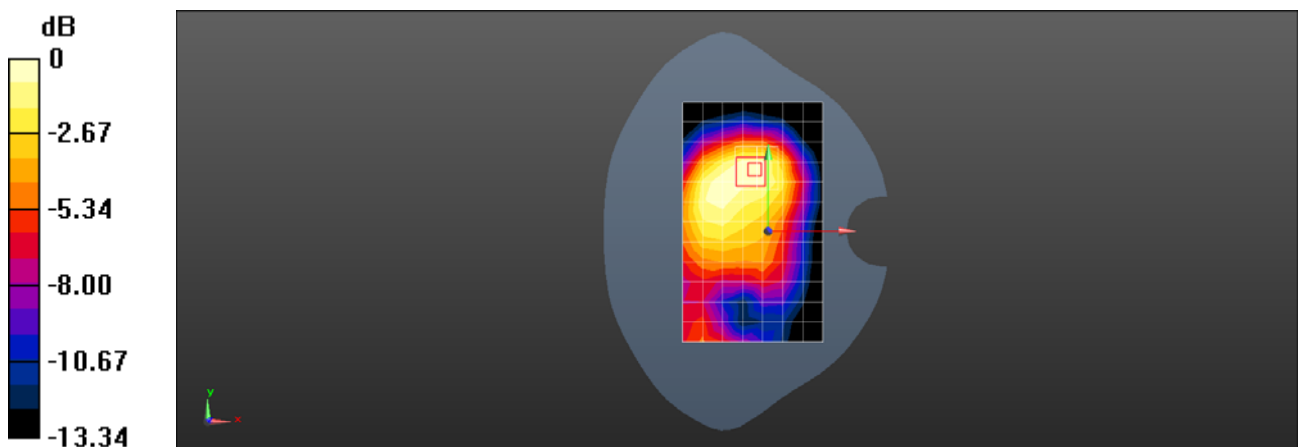

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band IV 1412CH Top side 10mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.3$ S/m; $\epsilon_r = 40.28$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.285 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.56 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.299 W/kg

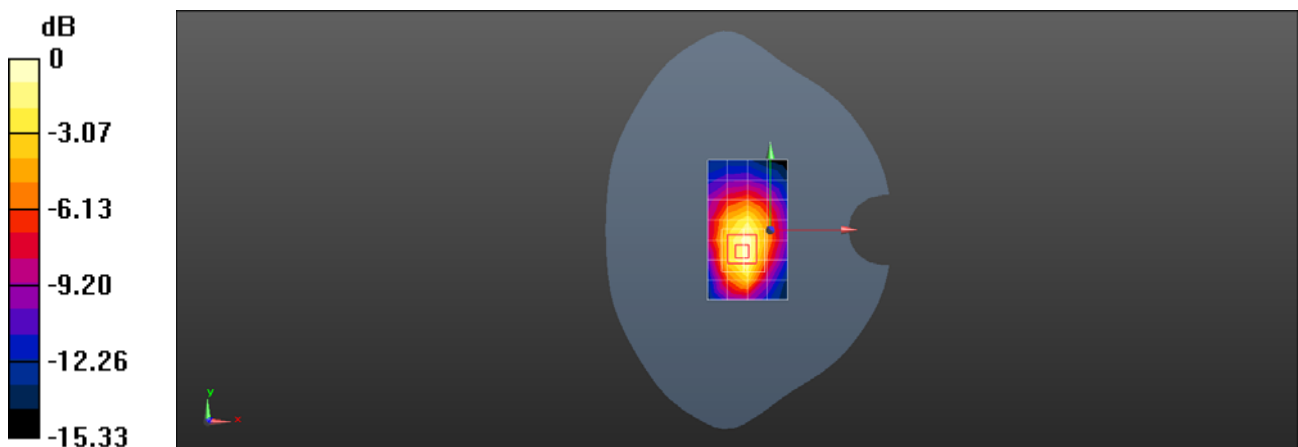

0 dB = 0.299 W/kg = -5.24 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band V 4182CH Right cheek Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.752$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.674 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.32 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.950 W/kg

SAR(1 g) = 0.446 W/kg; SAR(10 g) = 0.233 W/kg

Maximum value of SAR (measured) = 0.707 W/kg

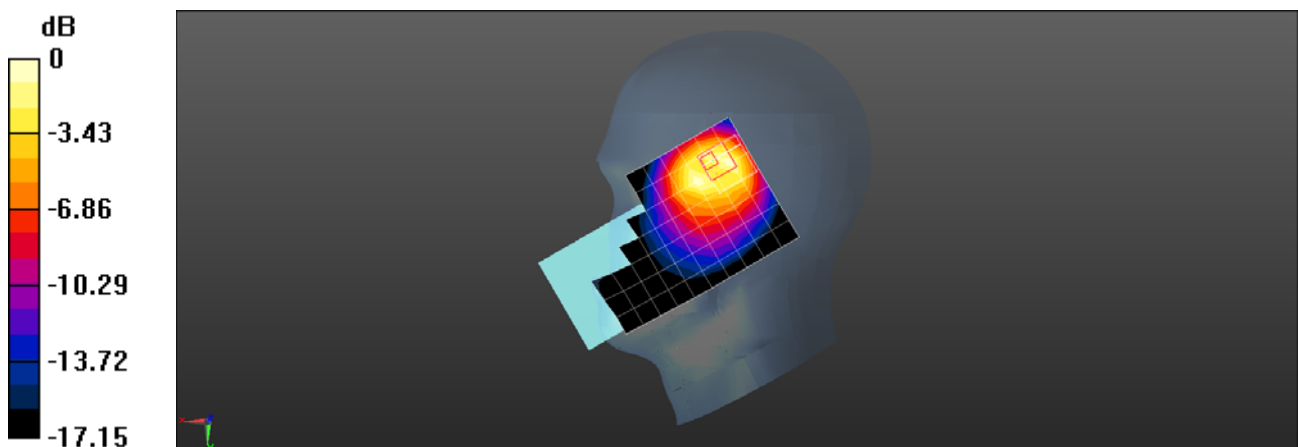

0 dB = 0.707 W/kg = -1.51 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band V 4182CH Back side 15mm Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.752$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.130 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.688 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.146 W/kg

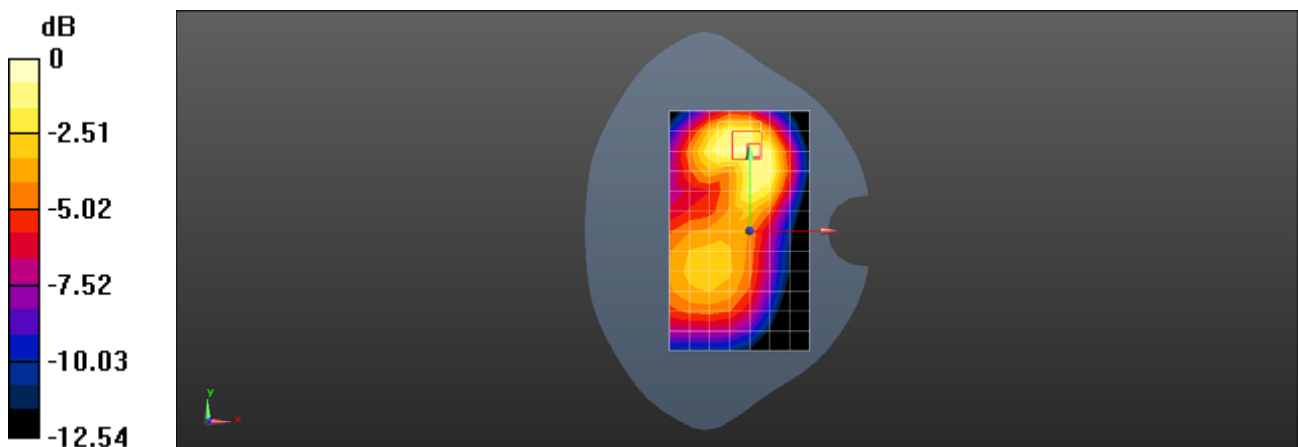

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band V 4182CH Left side 10mm Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.752$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.121 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.694 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.166 W/kg

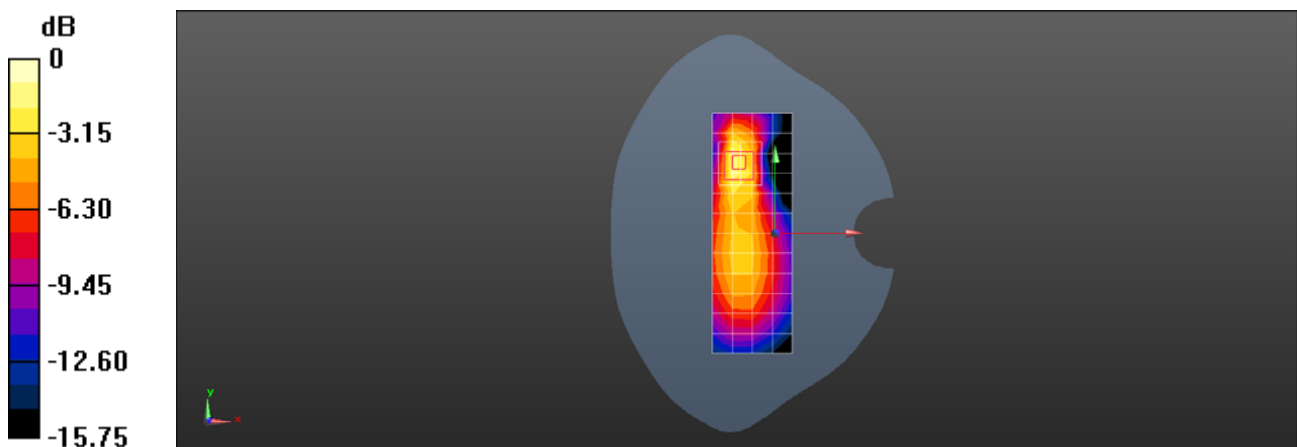

0 dB = 0.166 W/kg = -7.80 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band V 4182CH Left cheek Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.752$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0742 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.034 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.0764 W/kg

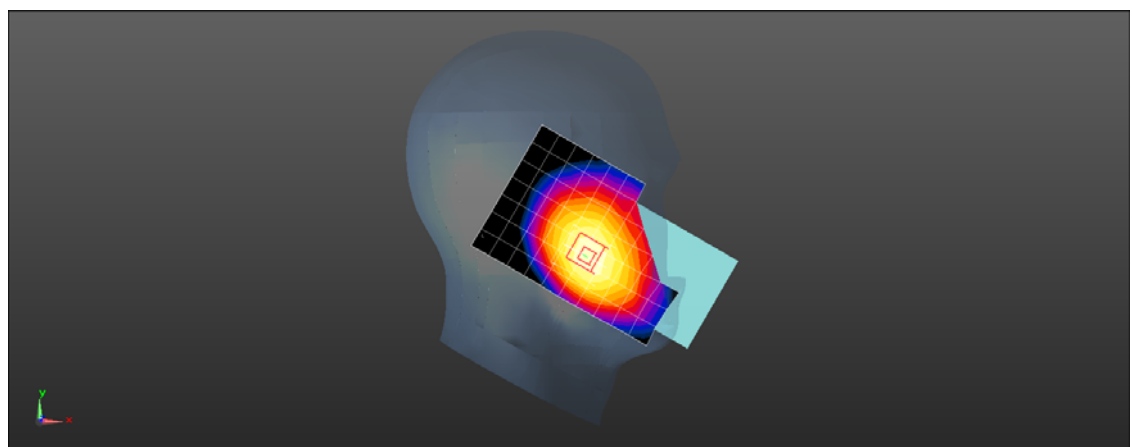

0 dB = 0.0764 W/kg = -11.17 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band V 4182CH Back side 15mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.752$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.174 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.35 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.201 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.178 W/kg

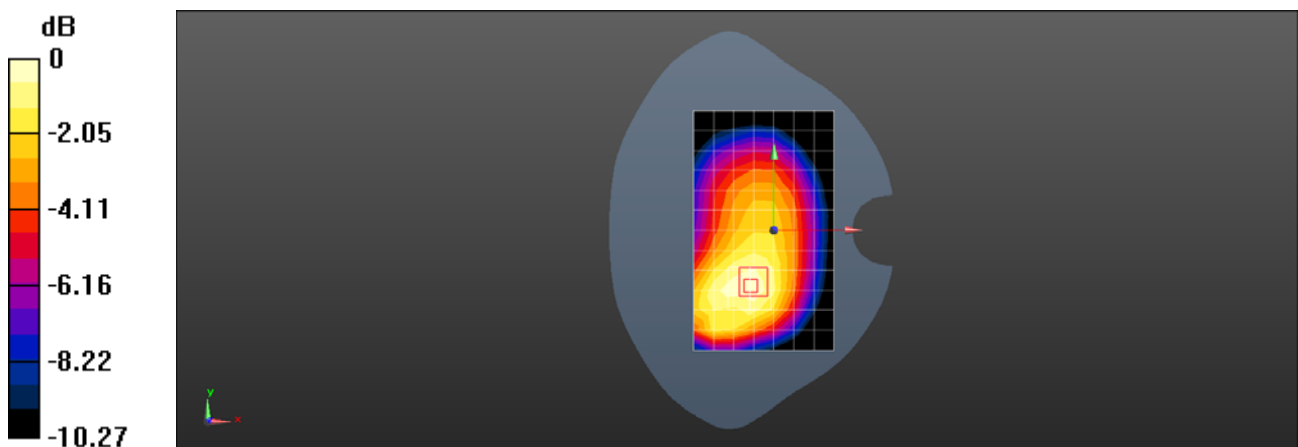

Test Laboratory: SGS-SAR Lab

M2012K11G WCDMA Band V 4182CH Back side 10mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.752$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.319 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.28 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.323 W/kg

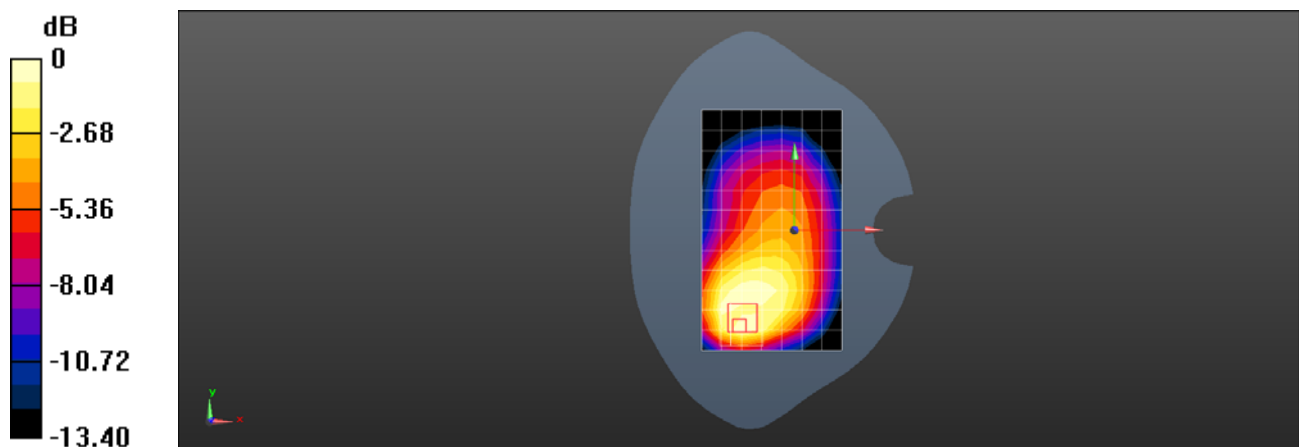

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 2 20M QPSK 1RB50 18700CH Right cheek Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 39.727$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.107 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.880 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.145 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.106 W/kg

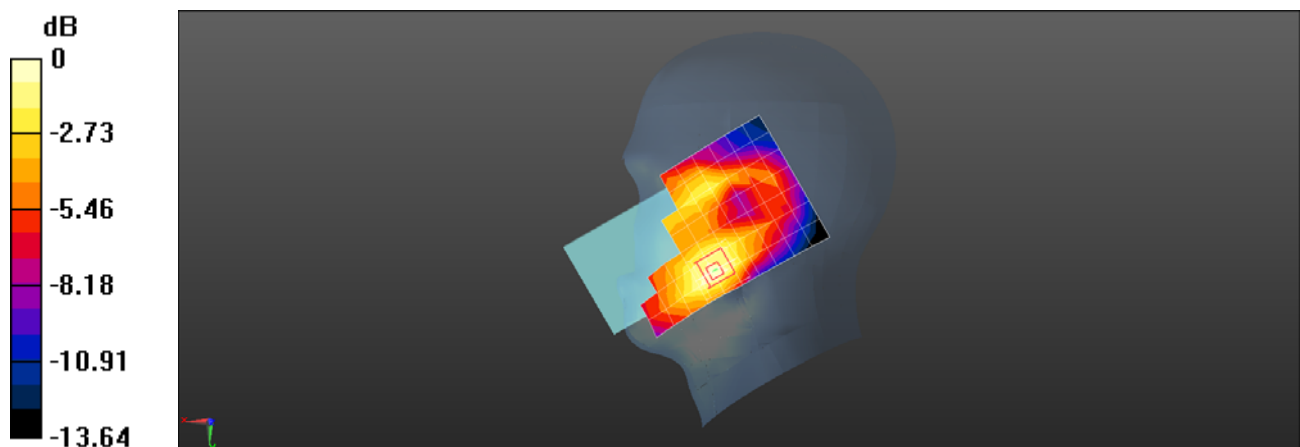

0 dB = 0.106 W/kg = -9.75 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 2 20M QPSK 1RB50 18700CH Back side 15mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 39.727$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.434 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.493 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.680 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.462 W/kg

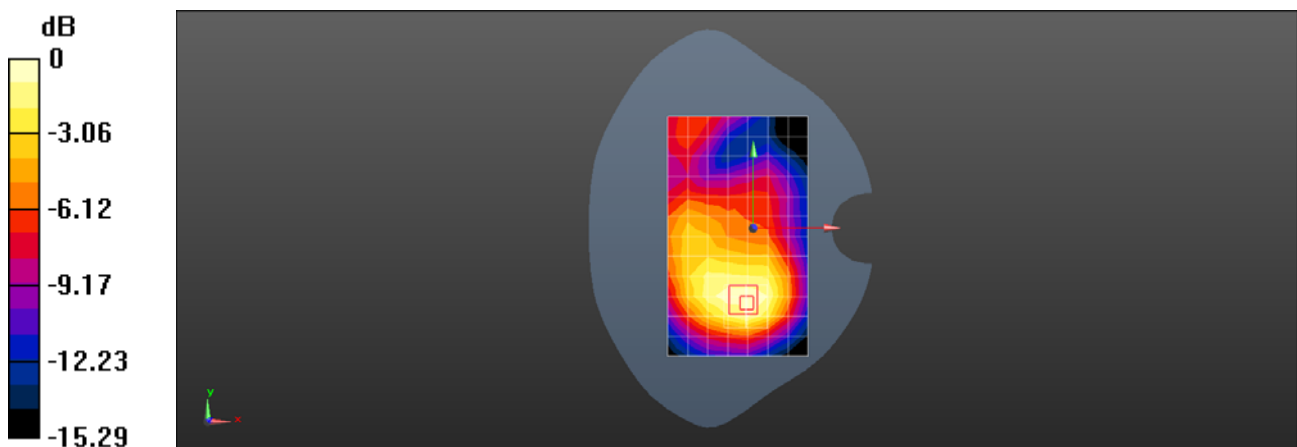

0 dB = 0.462 W/kg = -3.35 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 2 20M QPSK 50RB50 19100CH Bottom side 10mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.564$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.738 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.06 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.397 W/kg

Maximum value of SAR (measured) = 0.811 W/kg

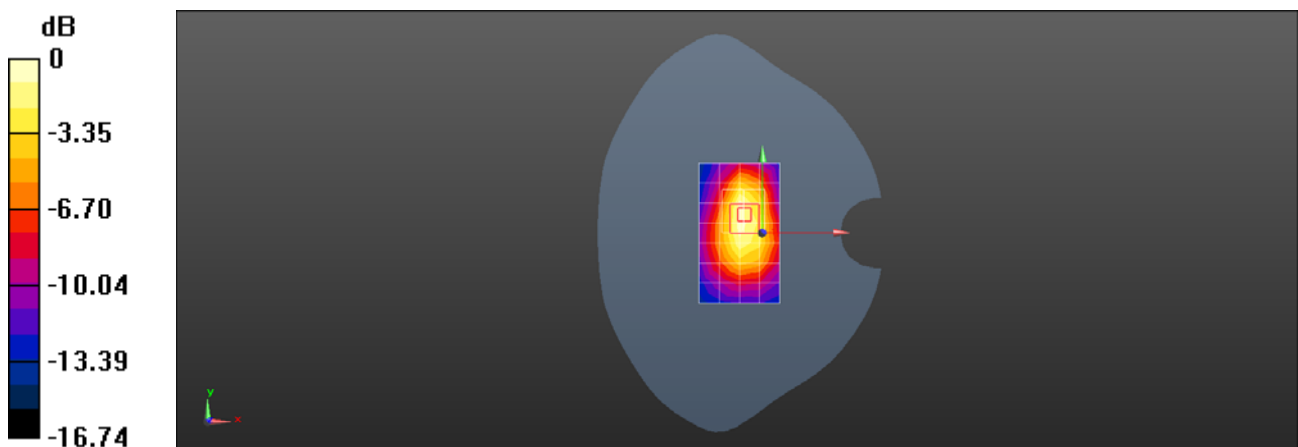

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 2 20M QPSK 1RB0 18700CH Right tilted Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 39.727$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.630 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.65 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.793 W/kg; SAR(10 g) = 0.408 W/kg

Maximum value of SAR (measured) = 0.920 W/kg

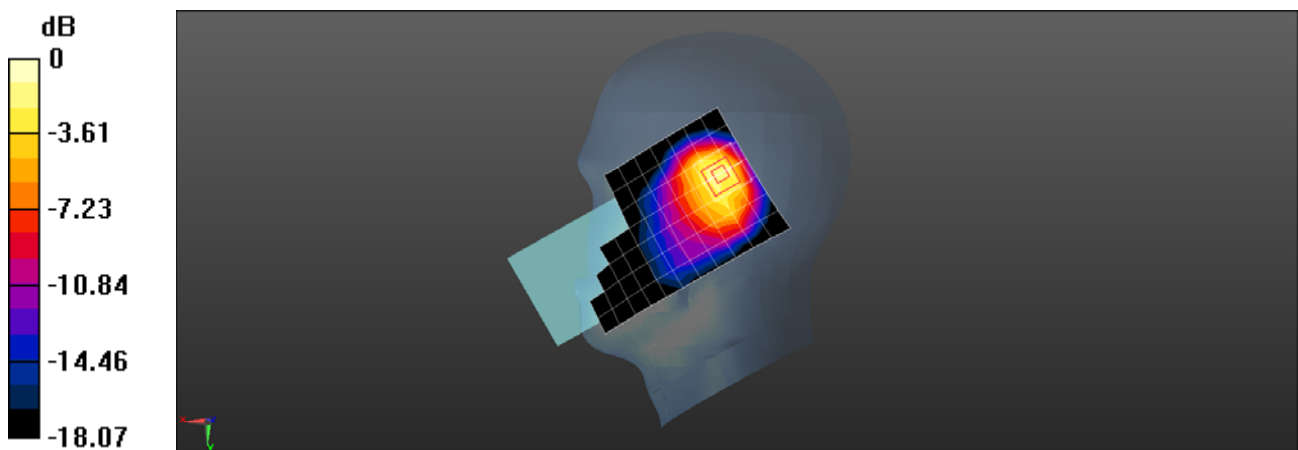

0 dB = 0.920 W/kg = -0.36 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 2 20M QPSK 1RB99 18900CH Back side 15mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.646$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.273 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.774 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.441 W/kg

SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.299 W/kg

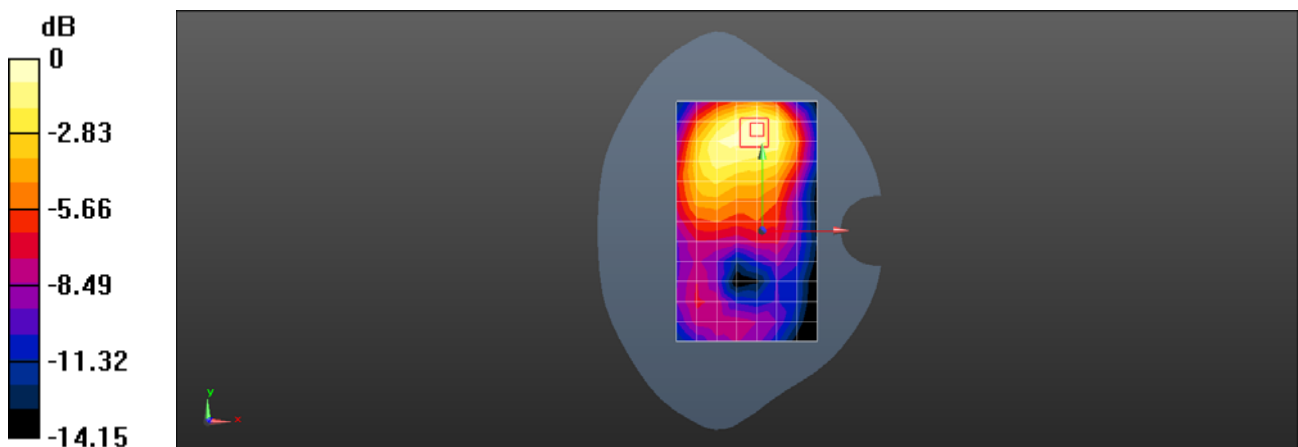

0 dB = 0.299 W/kg = -5.24 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 2 20M QPSK 50RB50 18700CH Top side 10mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 39.727$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.4, 8.4, 8.4); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.341 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.96 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 0.357 W/kg

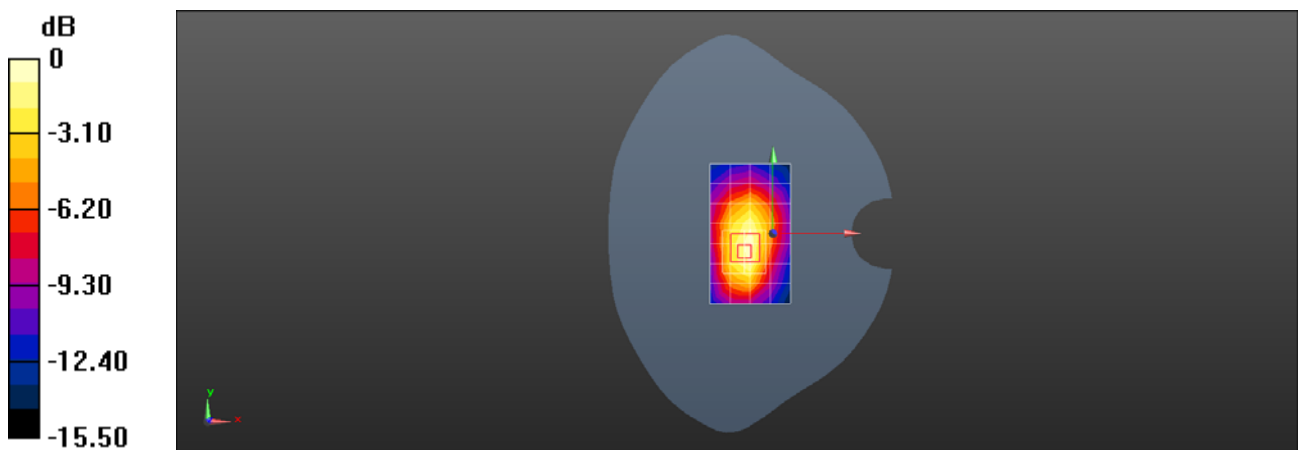

0 dB = 0.357 W/kg = -4.47 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 4 20M QPSK 1RB0 20300CH Right cheek Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 39.188$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0655 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.782 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0671 W/kg

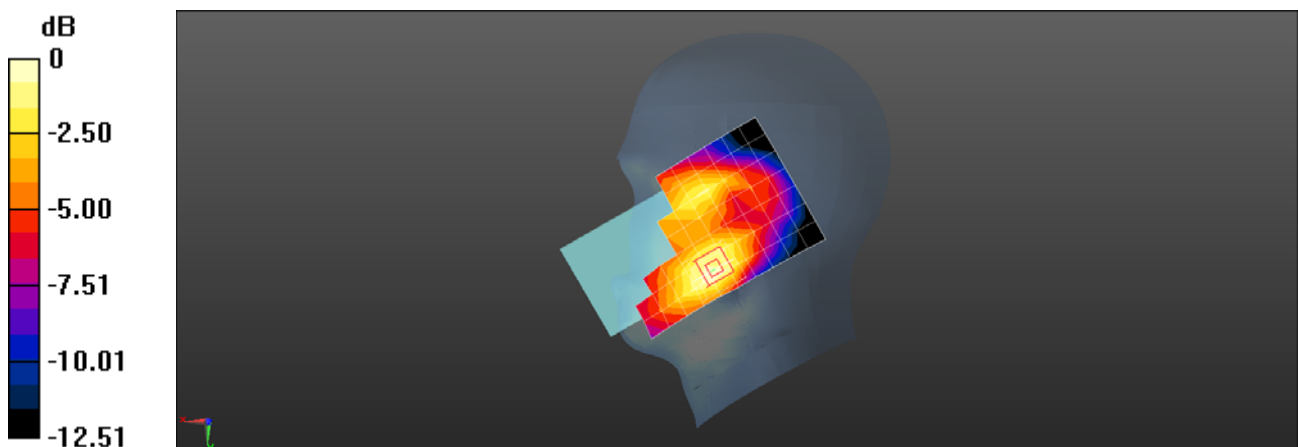

0 dB = 0.0671 W/kg = -11.73 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 4 20M QPSK 1RB0 20300CH Back side 15mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 39.188$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.184 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.307 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.204 W/kg

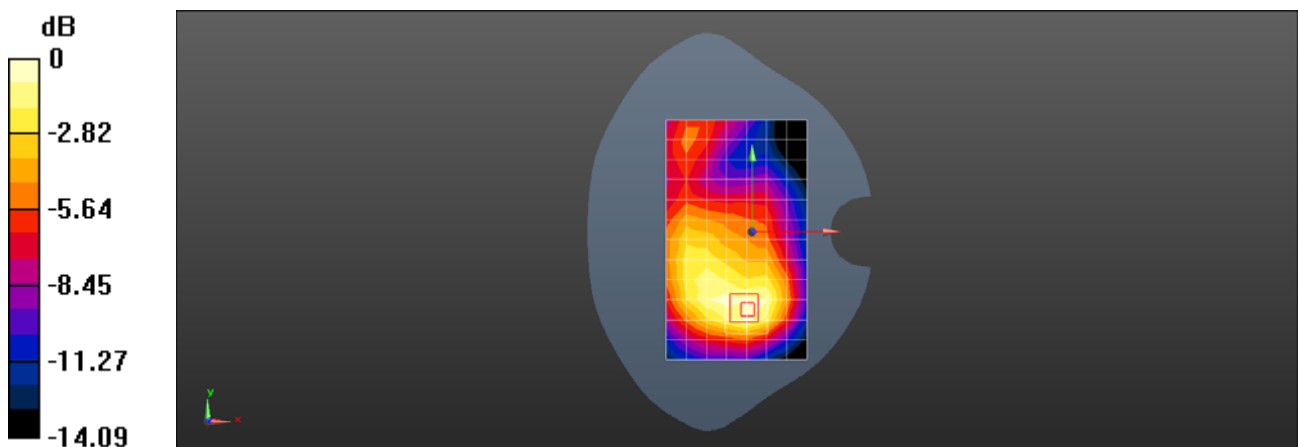

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 4 20M QPSK 50RB25 20175CH Bottom side 10mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.317$ S/m; $\epsilon_r = 39.243$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (5x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.561 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.19 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.910 W/kg

SAR(1 g) = 0.545 W/kg; SAR(10 g) = 0.312 W/kg

Maximum value of SAR (measured) = 0.607 W/kg

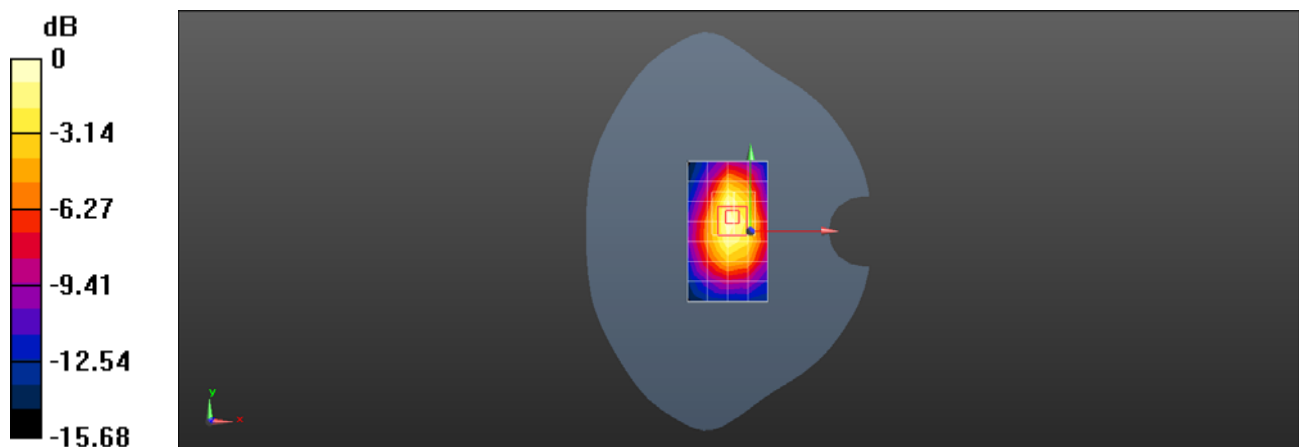

0 dB = 0.607 W/kg = -2.17 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 4 20M QPSK 50RB0 20175CH Right tilted Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.317$ S/m; $\epsilon_r = 39.243$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.577 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.37 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.708 W/kg; SAR(10 g) = 0.373 W/kg

Maximum value of SAR (measured) = 0.833 W/kg

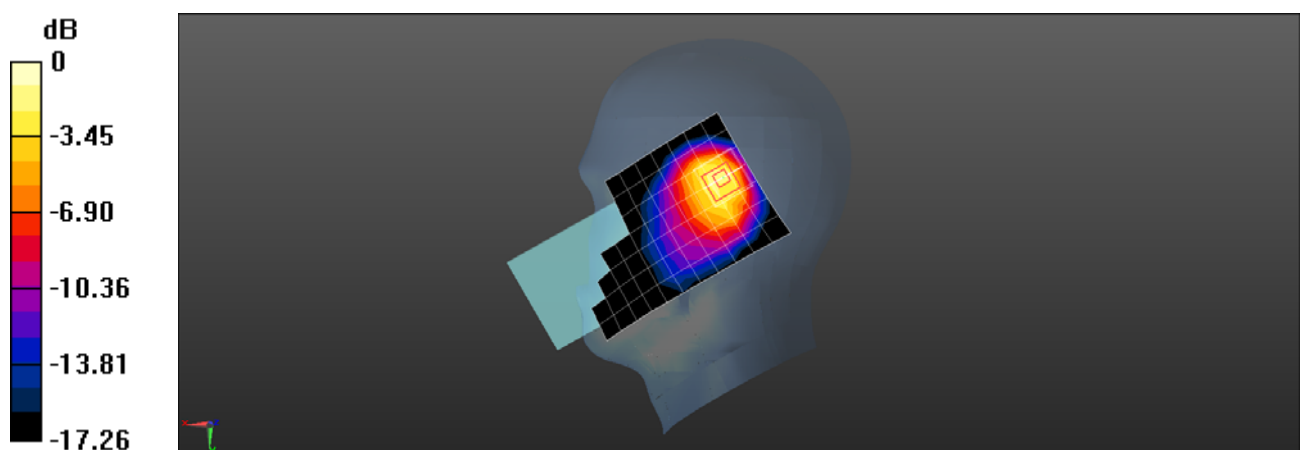

0 dB = 0.833 W/kg = -0.79 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 4 20M QPSK 1RB0 20175CH Back side 15mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.317$ S/m; $\epsilon_r = 39.243$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.337 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.937 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.476 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.349 W/kg

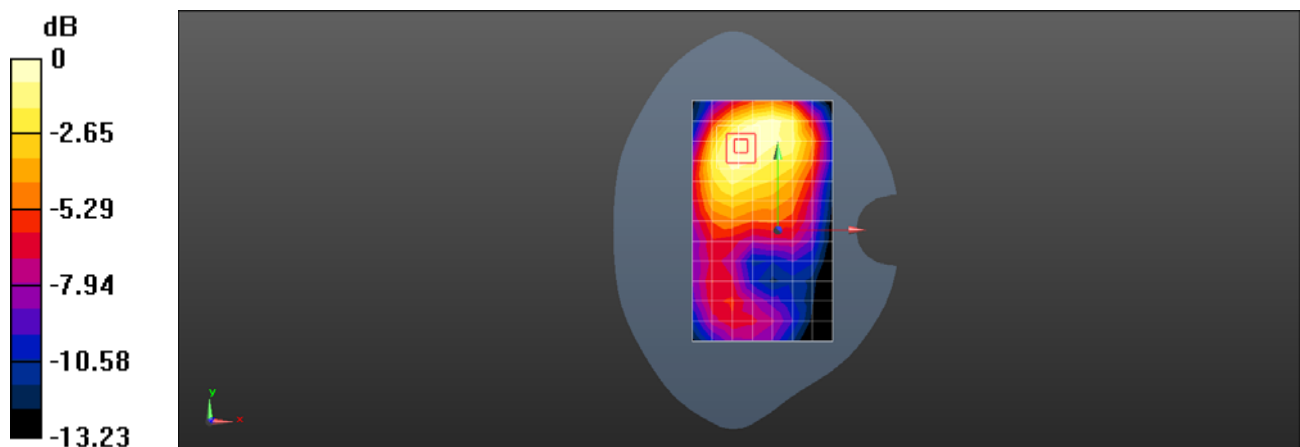

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 4 20M QPSK 50RB0 20175CH Top side 10mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.317$ S/m; $\epsilon_r = 39.243$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (5x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.298 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.32 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.449 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.308 W/kg

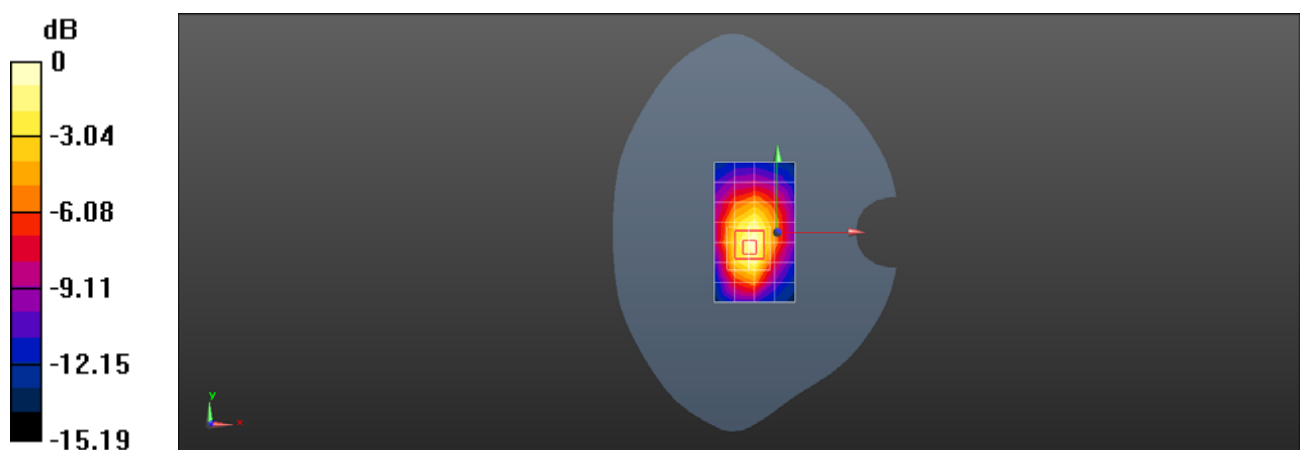

0 dB = 0.308 W/kg = -5.11 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 4 20M QPSK 1RB0 20300CH Left cheek Ant8

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 39.188$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.446 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.727 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.701 W/kg

SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 0.427 W/kg

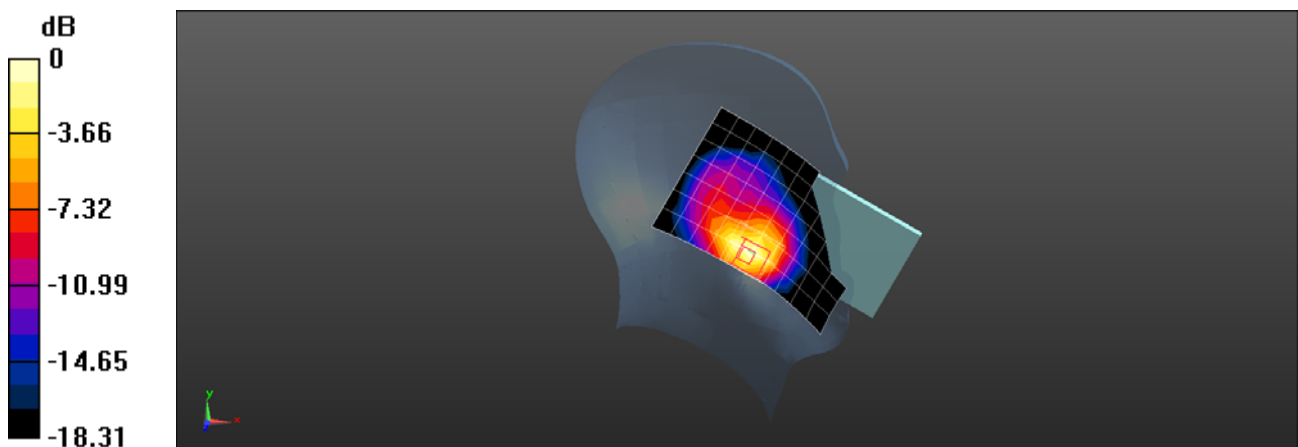

0 dB = 0.427 W/kg = -3.70 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 4 20M QPSK 1RB0 20300CH Back side 15mm Ant8

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 39.188$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0475 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.785 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0536 W/kg

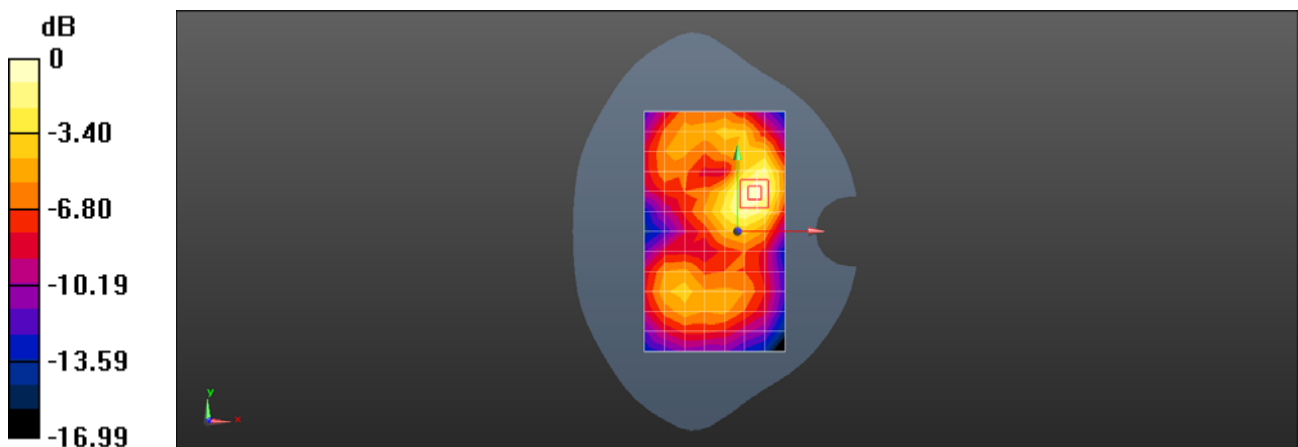

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 4 20M QPSK 1RB0 20300CH Left side 10mm Ant8

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 39.188$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.257 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.194 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.291 W/kg

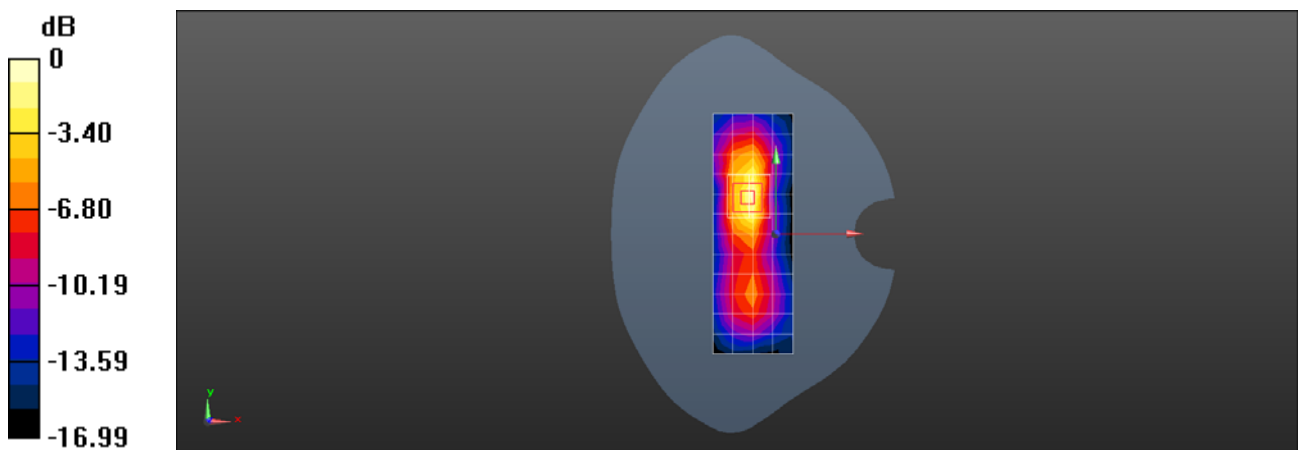

0 dB = 0.291 W/kg = -5.36 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 4 20M QPSK 1RB50 20175CH Right cheek Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.317$ S/m; $\epsilon_r = 39.243$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.197 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.961 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.200 W/kg

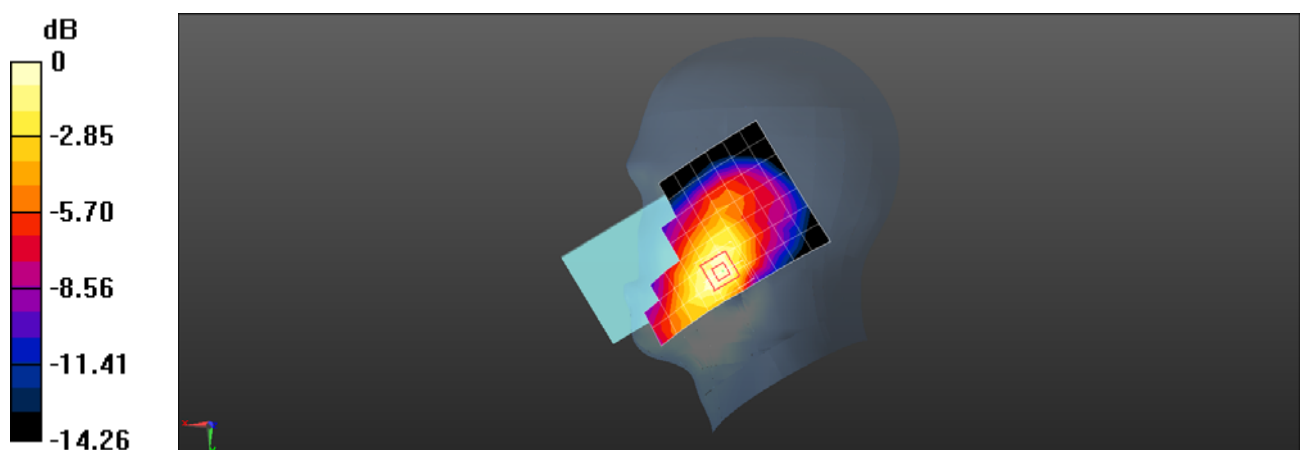

0 dB = 0.200 W/kg = -6.99 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 4 20M QPSK 1RB50 20175CH Back side 15mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.317$ S/m; $\epsilon_r = 39.243$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.242 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.513 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.245 W/kg

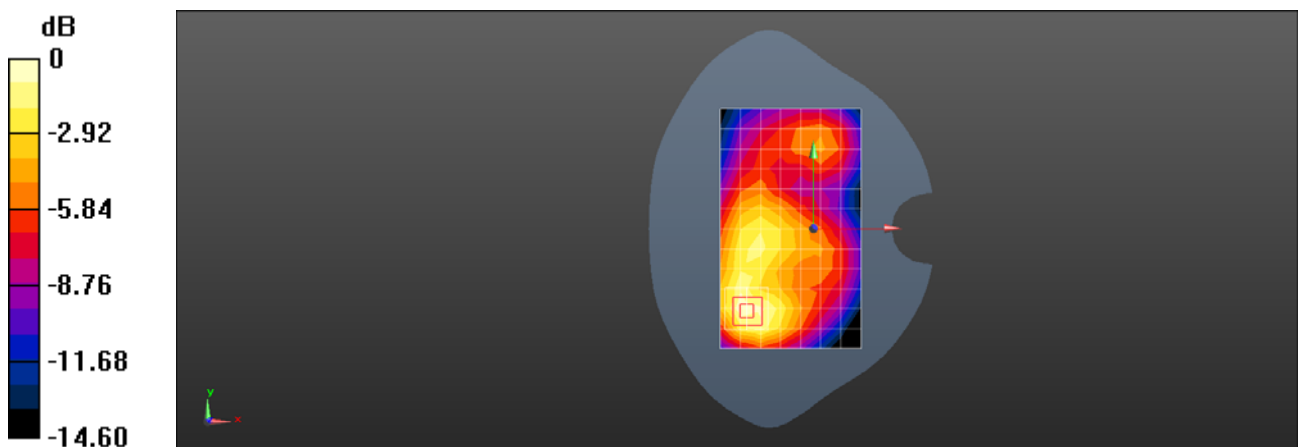

0 dB = 0.245 W/kg = -6.11 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 4 20M QPSK 50RB25 20300CH Back side 10mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026259

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 39.188$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.78, 8.78, 8.78); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.359 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.370 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.550 W/kg

SAR(1 g) = 0.335 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.403 W/kg

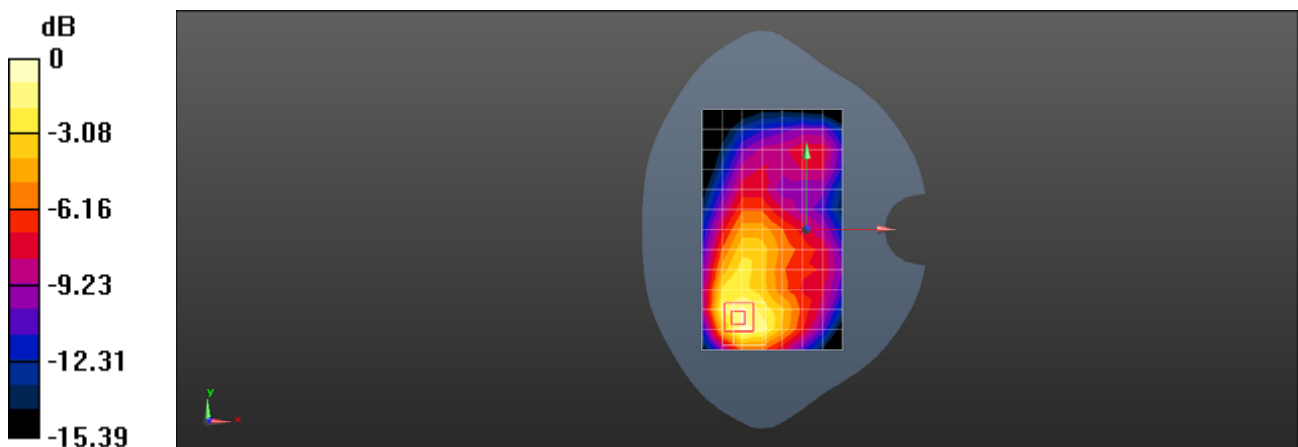

0 dB = 0.403 W/kg = -3.95 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 5 10M QPSK 1RB25 20600CH Right cheek Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.944 \text{ S/m}$; $\epsilon_r = 41.693$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.679 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.40 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.928 W/kg

SAR(1 g) = 0.440 W/kg ; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 0.693 W/kg

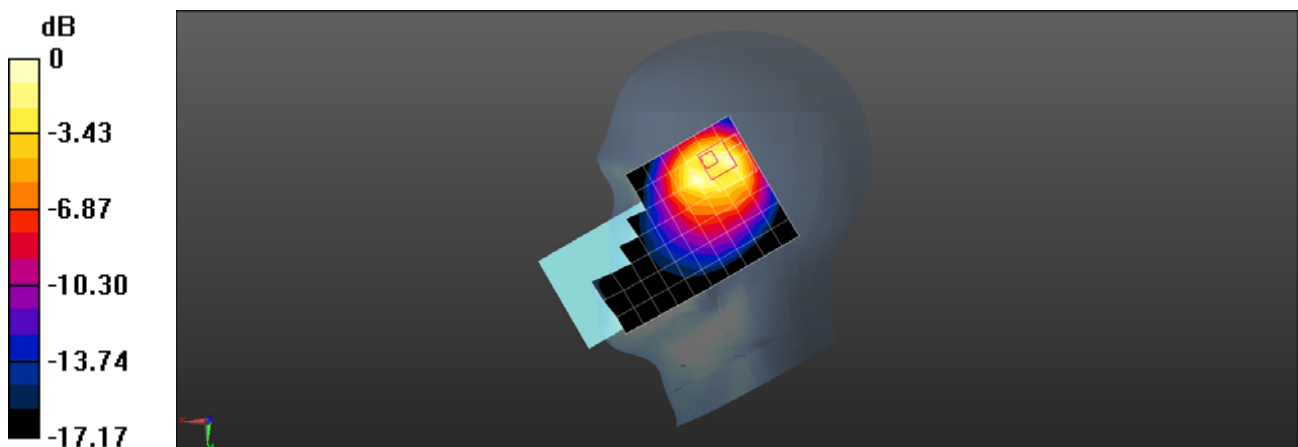

$0 \text{ dB} = 0.693 \text{ W/kg} = -1.59 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 5 10M QPSK 1RB0 20450CH Front side 15mm Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 829 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 41.811$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.114 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.658 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.126 W/kg ; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.118 W/kg

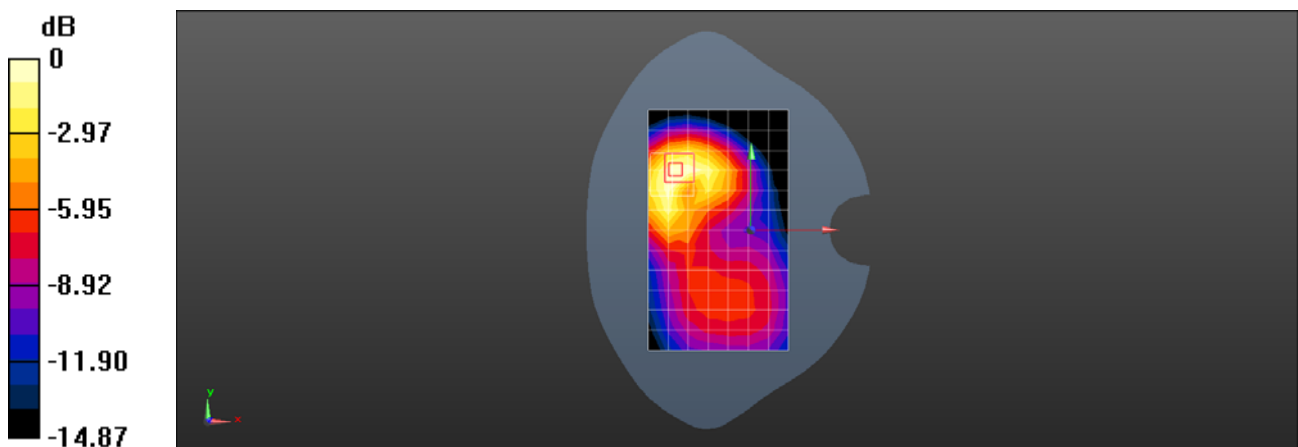

$0 \text{ dB} = 0.118 \text{ W/kg} = -9.28 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 5 10M QPSK 1RB25 20600CH Left side 10mm Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.944 \text{ S/m}$; $\epsilon_r = 41.693$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.159 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.143 V/m ; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.117 W/kg ; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.169 W/kg

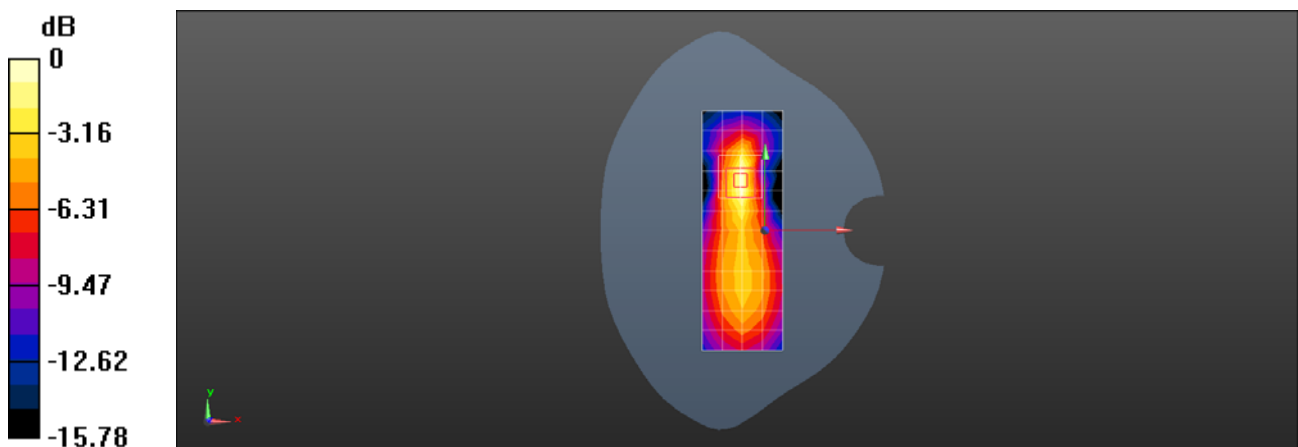

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 5 10M QPSK 1RB0 20450CH Left cheek Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 829 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 41.811$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0821 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.432 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0990 W/kg

SAR(1 g) = 0.079 W/kg ; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.0867 W/kg

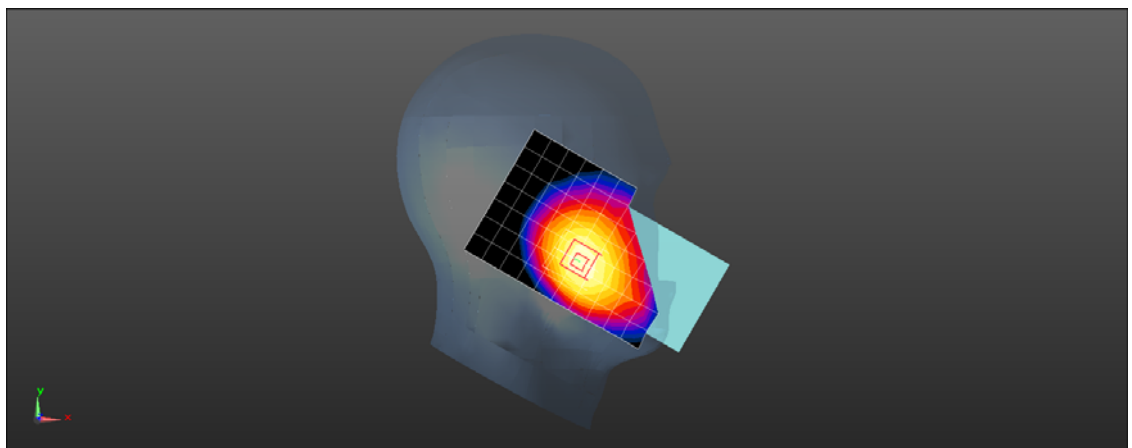

0 dB = 0.0867 W/kg = -10.62 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 5 10M QPSK 1RB0 20450CH Back side 15mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 829 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 41.811$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.174 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.89 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.222 W/kg

SAR(1 g) = 0.163 W/kg ; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.183 W/kg

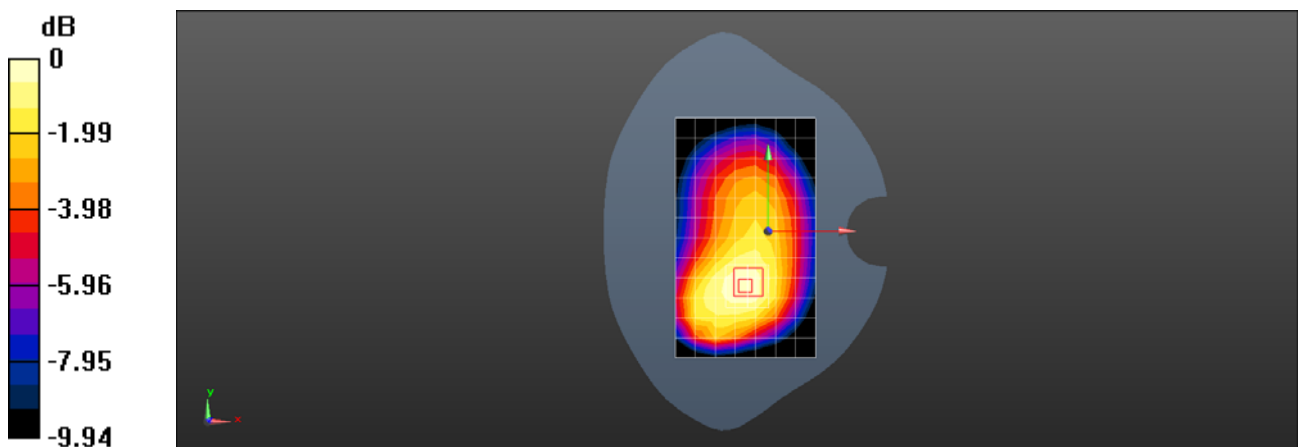

$0 \text{ dB} = 0.183 \text{ W/kg} = -7.38 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 5 10M QPSK 1RB0 20450CH Back side 10mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 829 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 41.811$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.32, 10.32, 10.32); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.289 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.72 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.257 W/kg ; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.303 W/kg

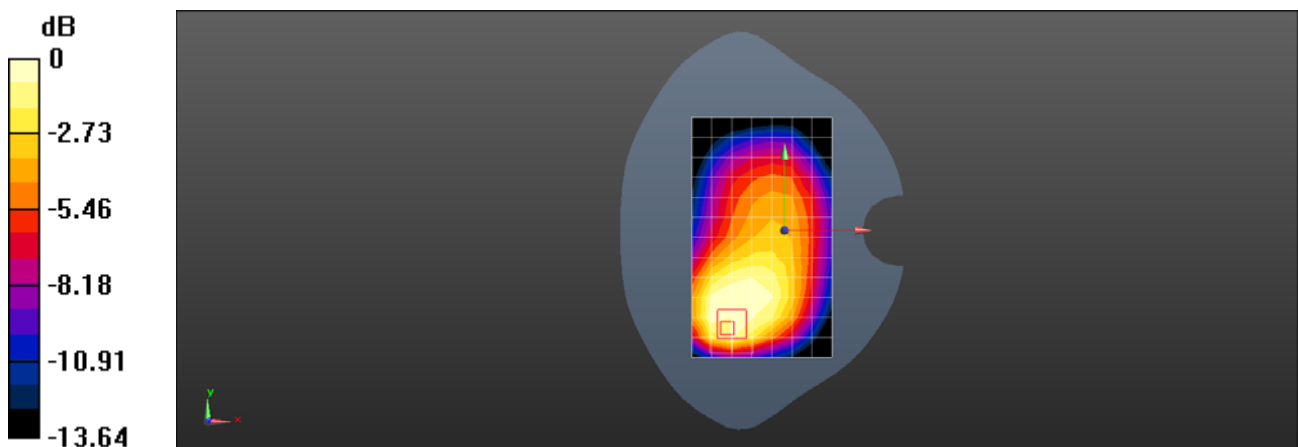

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 7 20M QPSK 1RB50 20850CH Left cheek Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 39.731$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.351 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.930 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.444 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.335 W/kg

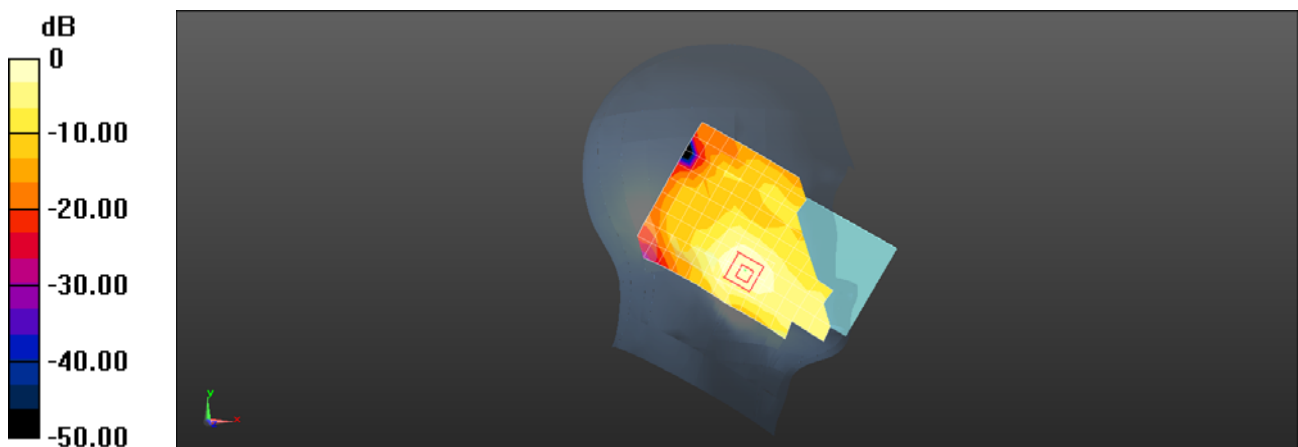

0 dB = 0.335 W/kg = -4.75 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 7 20M QPSK 1RB50 20850CH Back side 15mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 39.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.772 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.491 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.573 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 0.811 W/kg

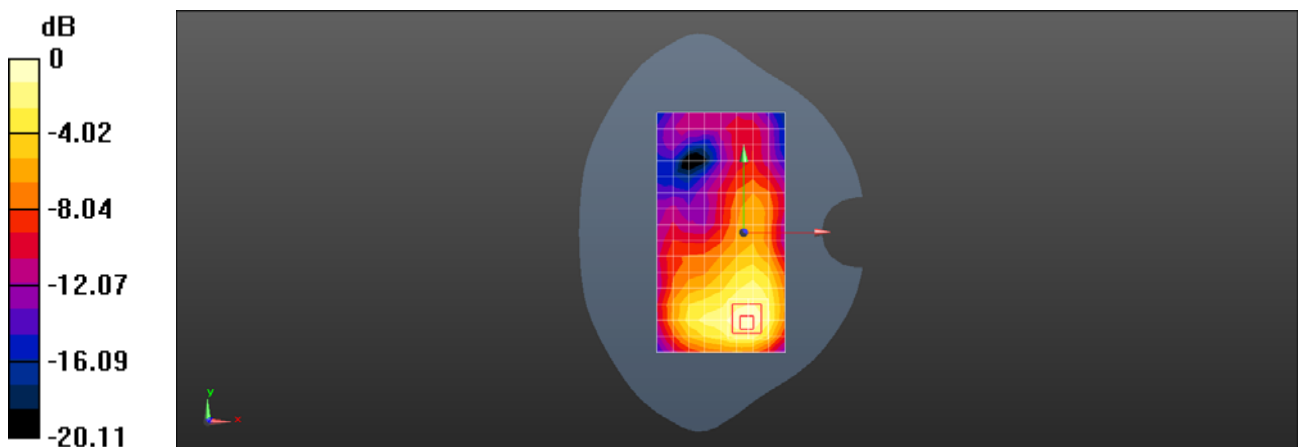

0 dB = 0.811 W/kg = -0.91 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 7 20M QPSK 50RB50 21100CH Back side 10mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.608$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.410 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.055 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.443 W/kg

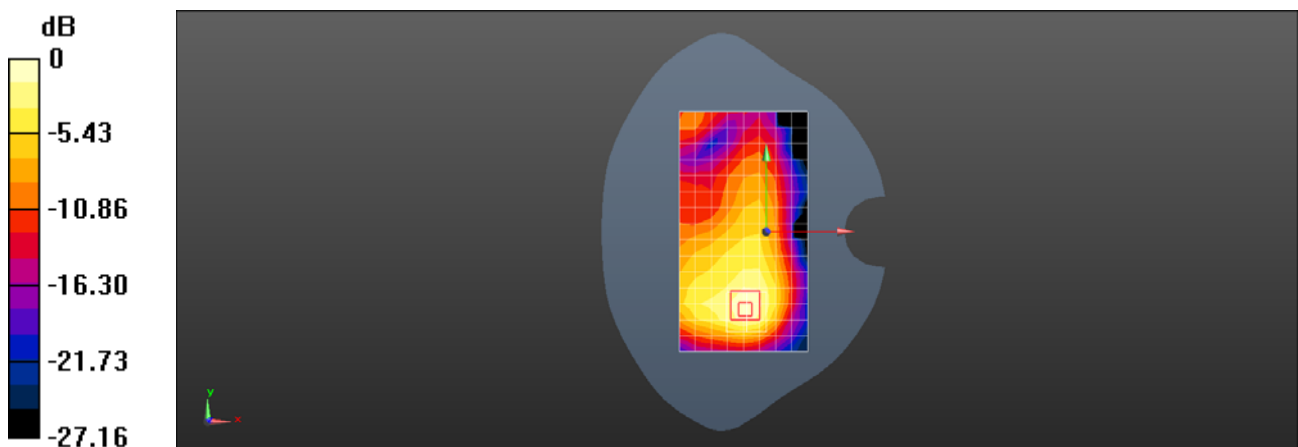

0 dB = 0.443 W/kg = -3.54 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 7 20M QPSK 50RB25 20850CH Right tilted Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026309

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 39.731$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.325 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.674 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.798 W/kg

SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.413 W/kg

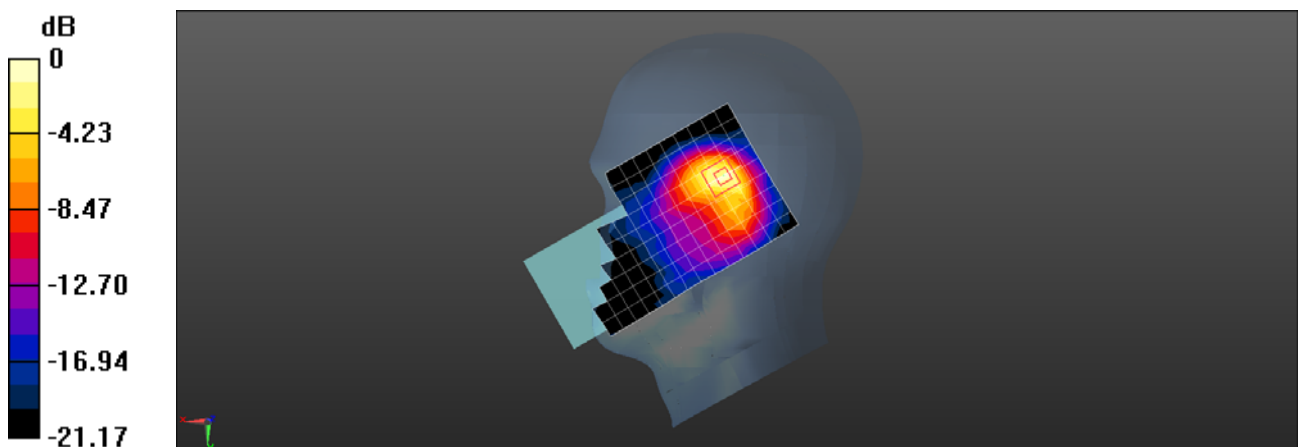

0 dB = 0.413 W/kg = -3.84 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 7 20M QPSK 1RB99 20850CH Back side 15mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 39.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.554 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.365 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.847 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.642 W/kg

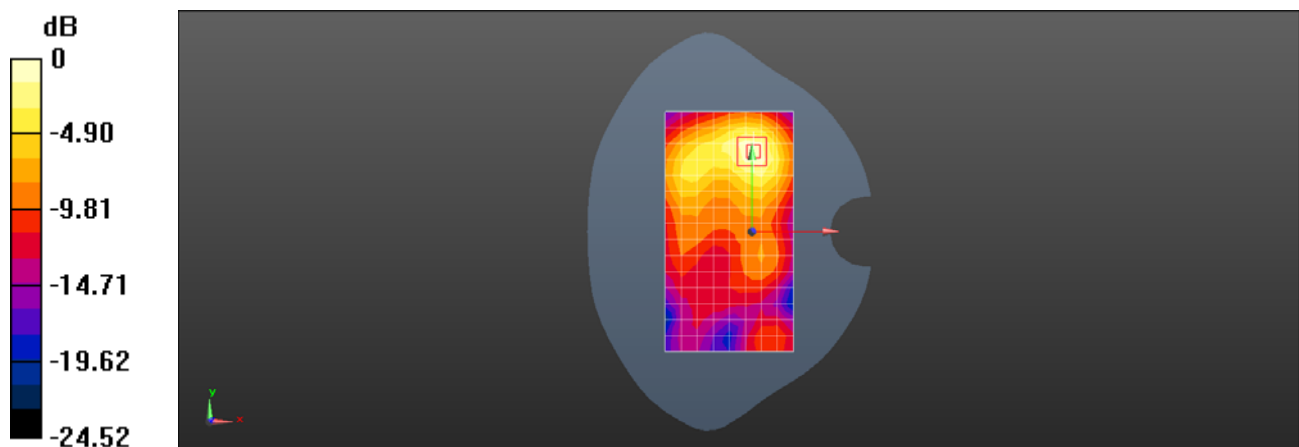

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 7 20M QPSK 1RB99 20850CH Back side 10mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026309

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 39.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.118 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.952 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.125 W/kg

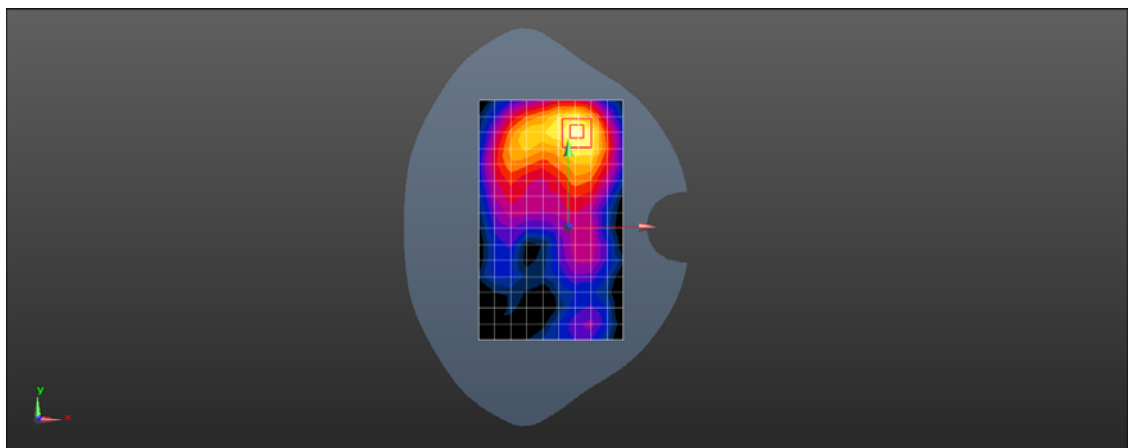

0 dB = 0.125 W/kg = -9.03 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 7 20M QPSK 50RB25 20850CH Left cheek Ant8

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 39.731$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.369 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.506 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.670 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 0.443 W/kg

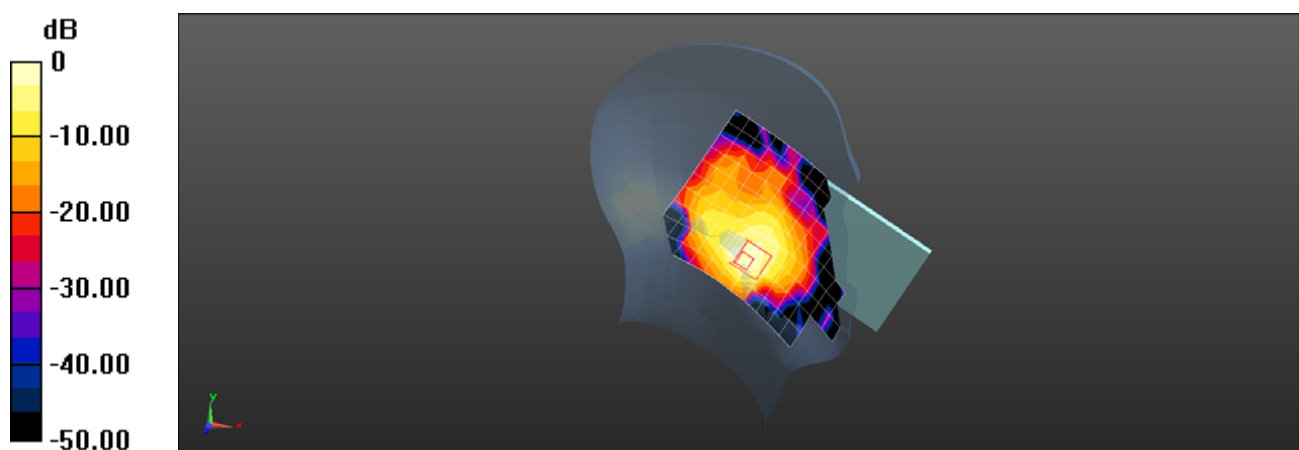

0 dB = 0.443 W/kg = -3.54 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 7 20M QPSK 50RB0 20850CH Back side 15mm Ant8

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 39.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0697 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.371 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0920 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0683 W/kg

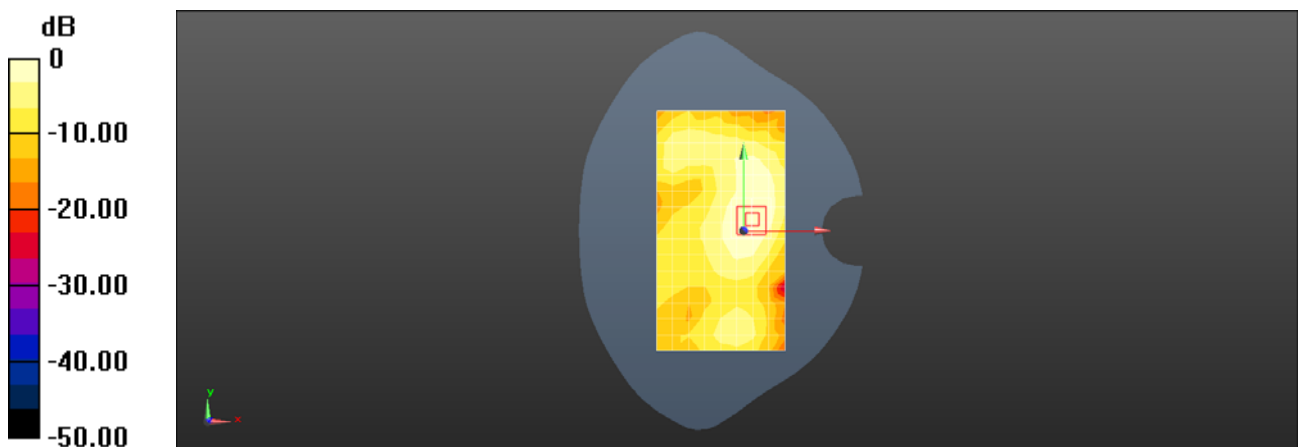

0 dB = 0.0683 W/kg = -11.66 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 7 20M QPSK 50RB25 20850CH Left side 10mm Ant8

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 39.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.159 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.734 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.180 W/kg

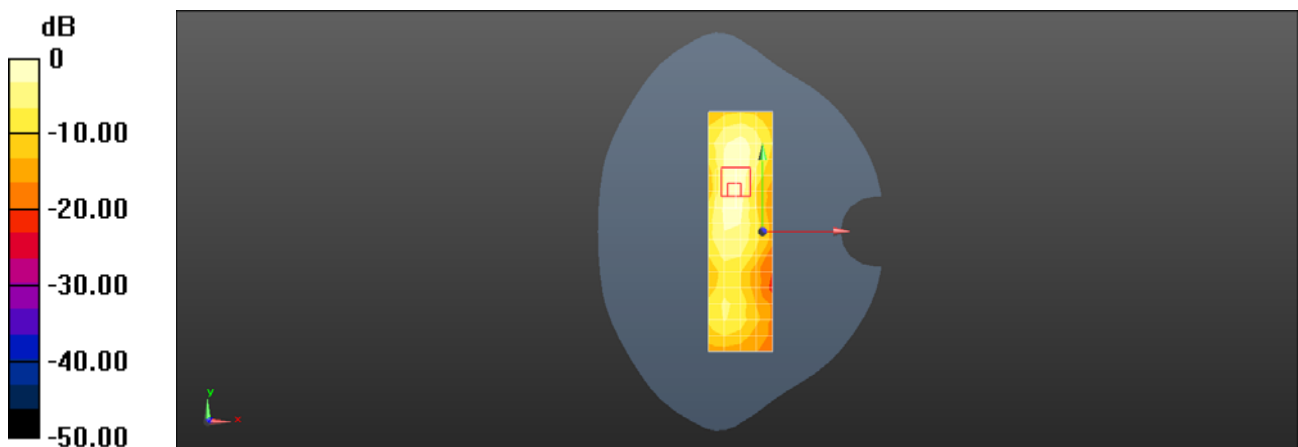

0 dB = 0.180 W/kg = -7.45 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 7 20M QPSK 1RB99 21100CH Right cheek Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.608$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.419 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.153 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.467 W/kg

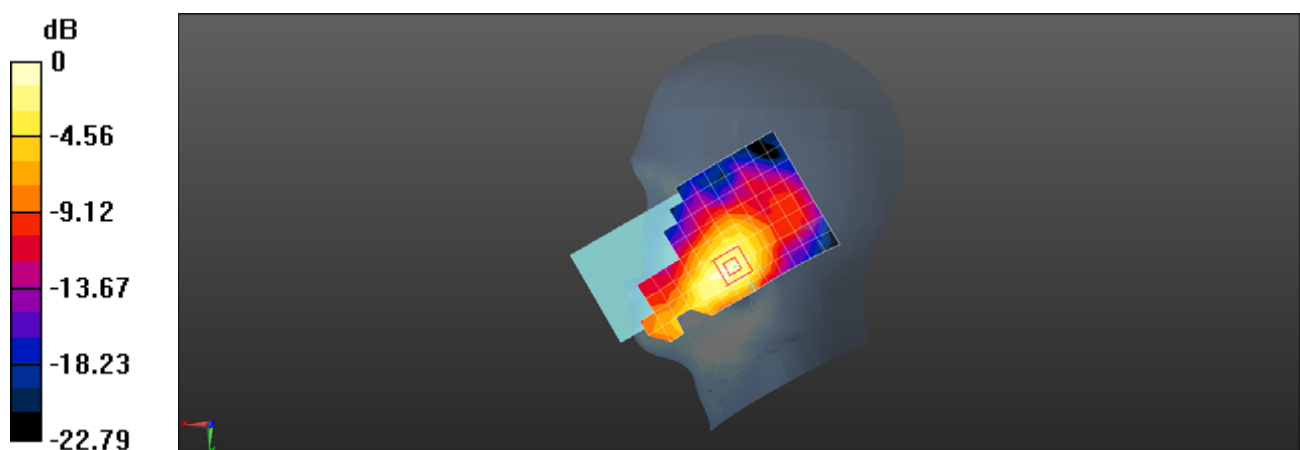

0 dB = 0.467 W/kg = -3.31 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 7 20M QPSK 1RB99 21100CH Back side 15mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.608$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.391 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.214 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.564 W/kg

SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.429 W/kg

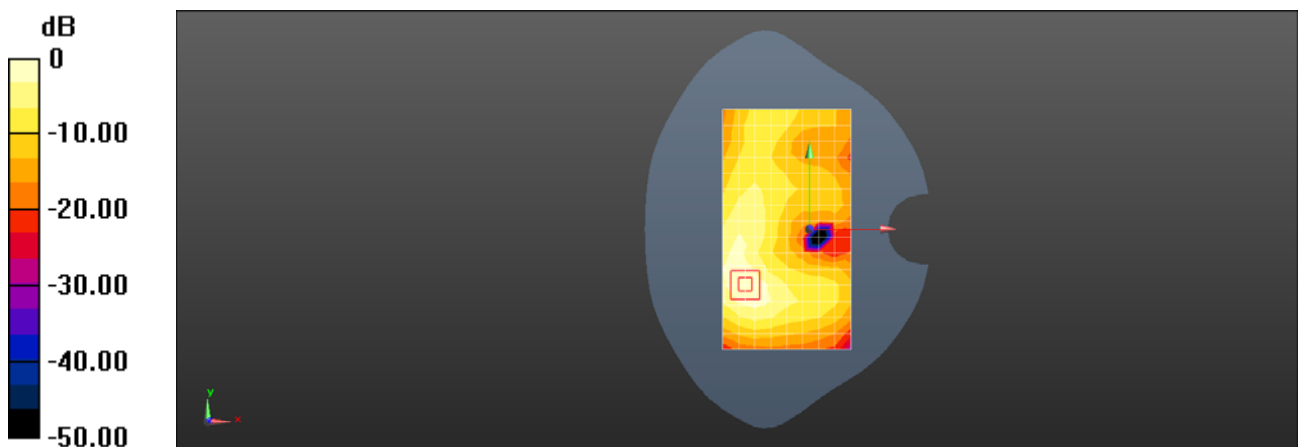

0 dB = 0.429 W/kg = -3.68 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 7 20M QPSK 50RB0 21100CH Right side 10mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026309

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.608$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.219 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.591 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.229 W/kg

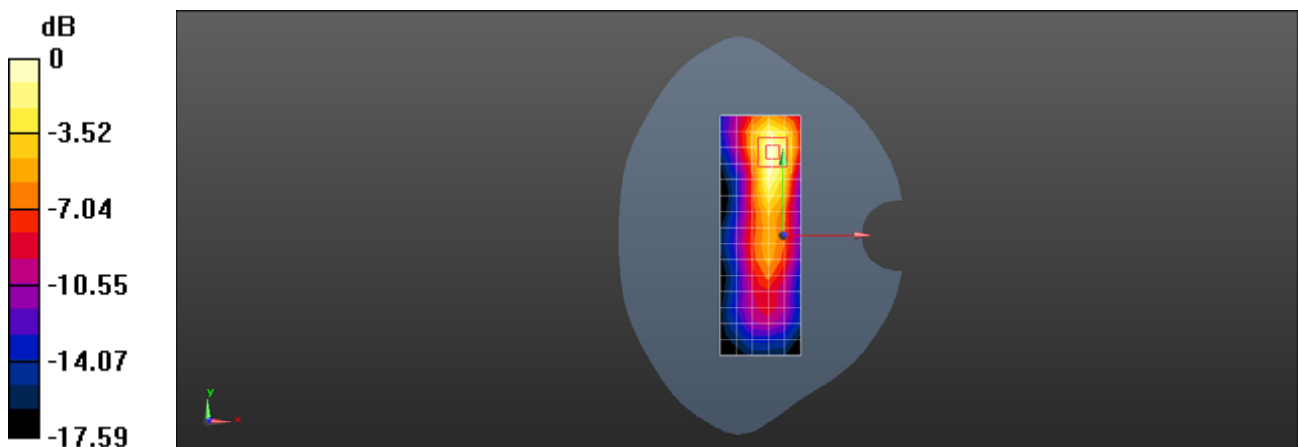

0 dB = 0.229 W/kg = -6.40 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G ENDC LTE Band 7 20M QPSK 1RB0 21350CH Left cheek Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026242

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 39.496$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.177 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.796 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

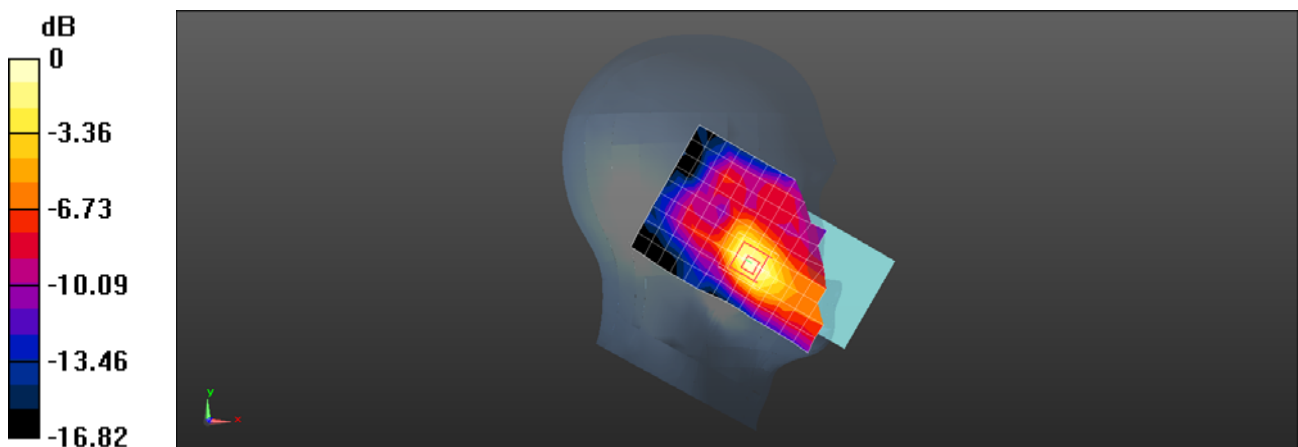

0 dB = 0.175 W/kg = -7.57 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G ENDC LTE Band 7 20M QPSK 1RB0 21350CH Back side 15mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026242

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 39.496$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.269 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.174 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.463 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.282 W/kg

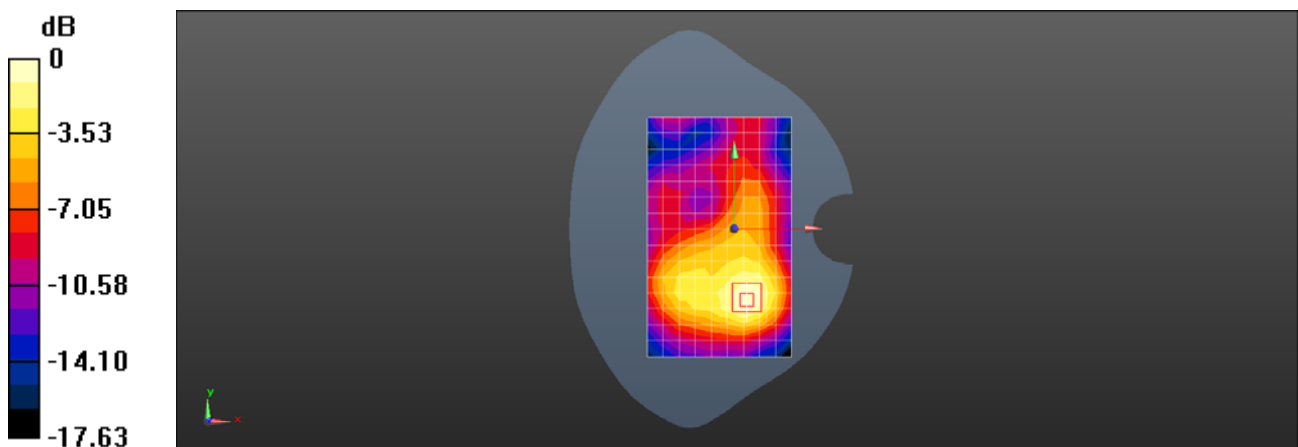

Test Laboratory: SGS-SAR Lab

M2012K11G ENDC LTE Band 7 20M QPSK 50RB25 21100CH Back side 10mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026242

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.158 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.626 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.166 W/kg

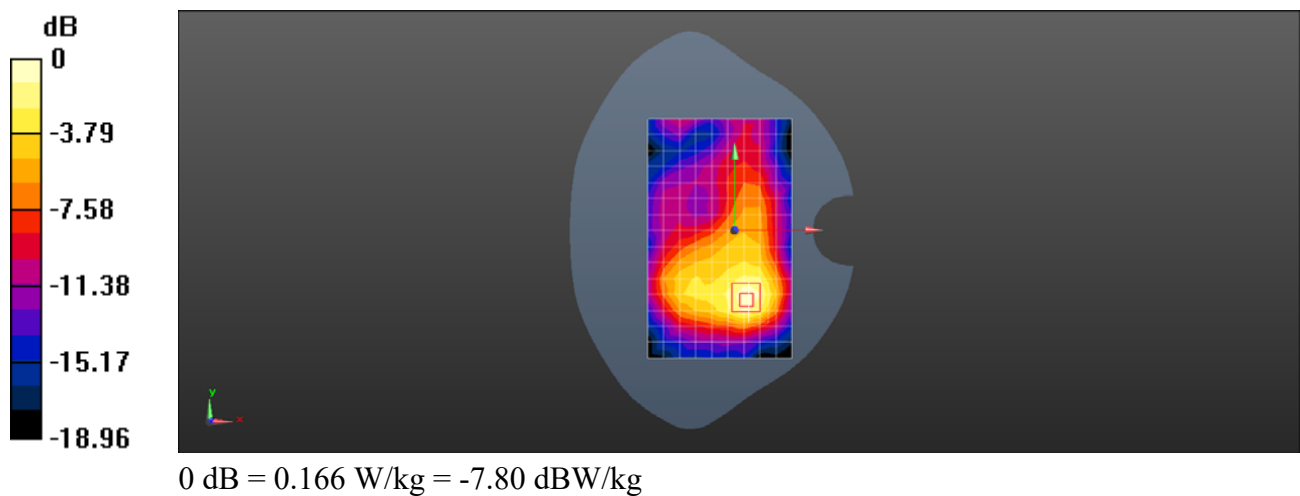

Test Laboratory: SGS-SAR Lab

M2012K11G ENDC LTE Band 7 20M QPSK 50RB0 20850CH Right tilted Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026242

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 39.731$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.191 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.895 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.216 W/kg

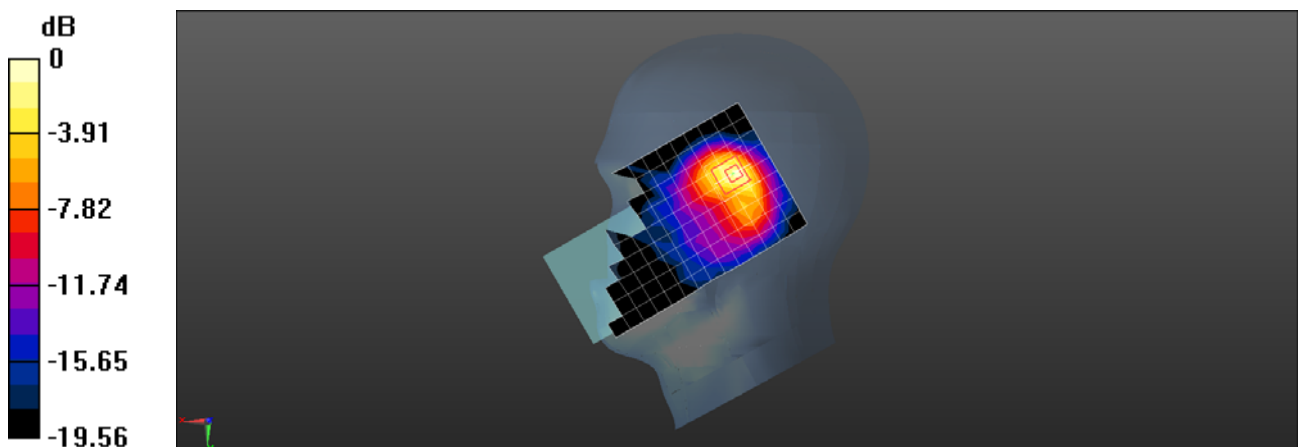

0 dB = 0.216 W/kg = -6.66 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G ENDC LTE Band 7 20M QPSK 1RB0 21350CH Back side 15mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026242

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 39.496$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.170 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.099 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.174 W/kg

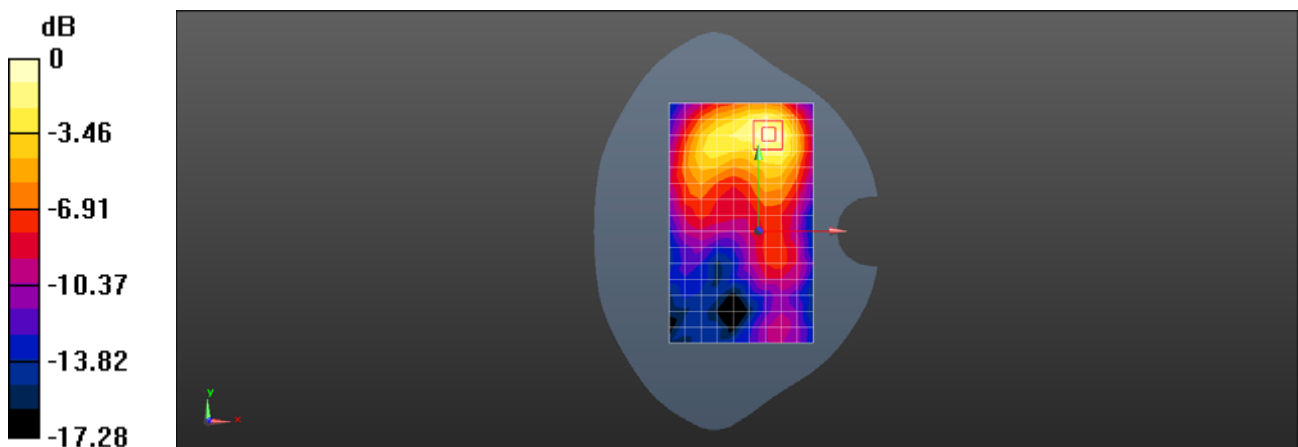

0 dB = 0.174 W/kg = -7.59 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G ENDC LTE Band 7 20M QPSK 50RB0 20850CH Back side 10mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026242

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 39.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0698 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.628 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.0691 W/kg

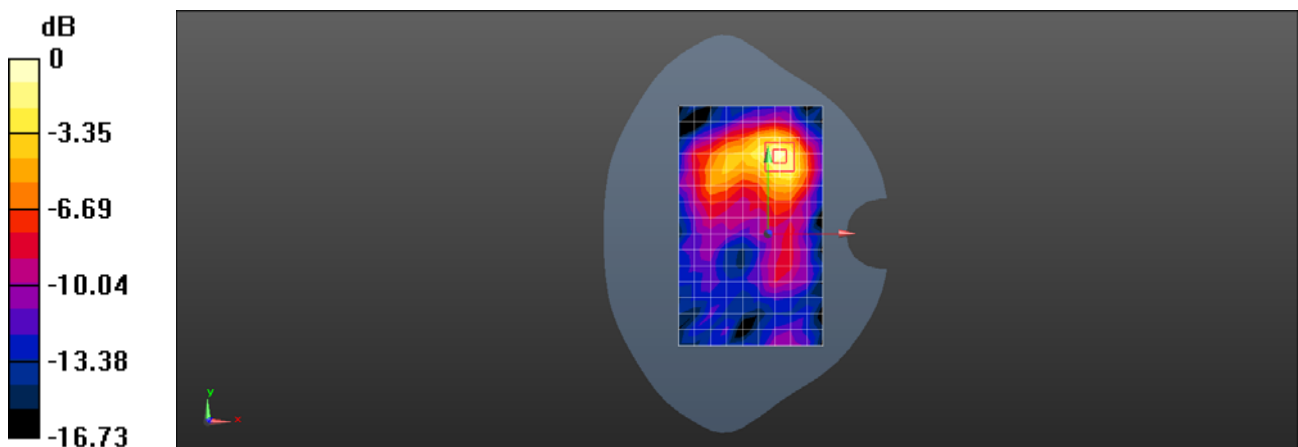

0 dB = 0.0691 W/kg = -11.61 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G ENDC LTE Band 7 20M QPSK 50RB50 21350CH Left cheek Ant8

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026242

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 39.496$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.478 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.792 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.933 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 0.479 W/kg

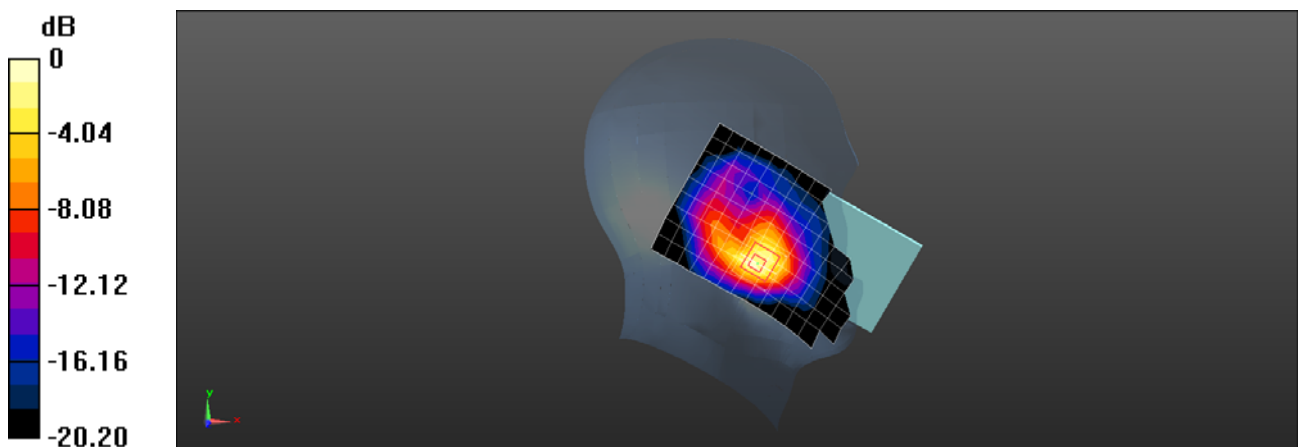

0 dB = 0.479 W/kg = -3.20 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G ENDC LTE Band 7 20M QPSK 1RB50 21350CH Front side 15mm Ant8

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026242

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 39.496$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.0910 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.530 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0951 W/kg

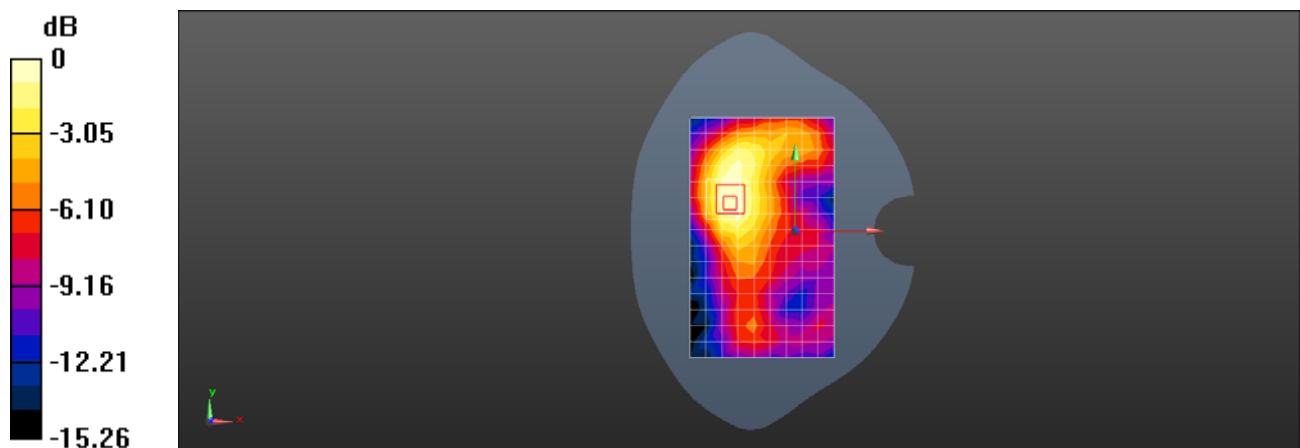

0 dB = 0.0951 W/kg = -10.22 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G ENDC LTE Band 7 20M QPSK 50RB50 20850CH Front side 10mm Ant8

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026242

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 39.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.120 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.559 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

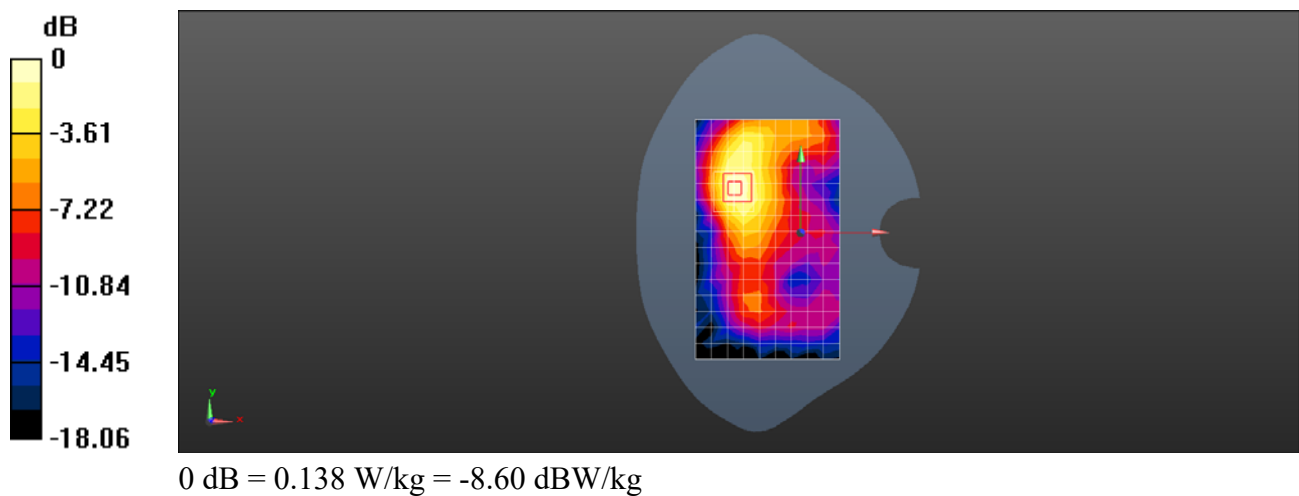

Test Laboratory: SGS-SAR Lab

M2012K11G ENDC LTE Band 7 20M QPSK 1RB0 21350CH Right cheek Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026242

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 39.496$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.585 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.436 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.896 W/kg

SAR(1 g) = 0.534 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.589 W/kg

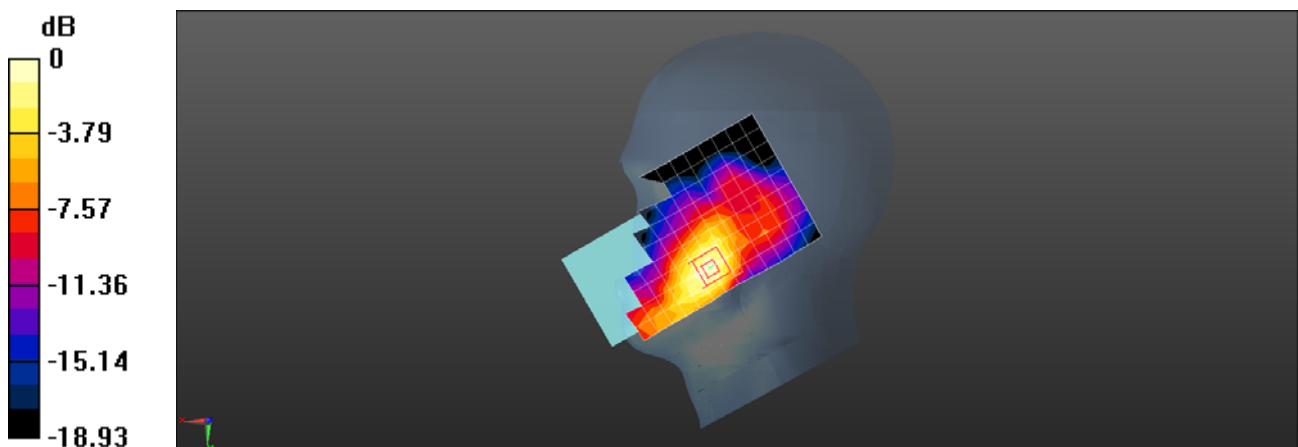

0 dB = 0.589 W/kg = -2.30 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G ENDC LTE Band 7 20M QPSK 1RB0 21350CH Back side 15mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026242

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 39.496$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.570 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.929 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.934 W/kg

SAR(1 g) = 0.551 W/kg; SAR(10 g) = 0.310 W/kg

Maximum value of SAR (measured) = 0.605 W/kg

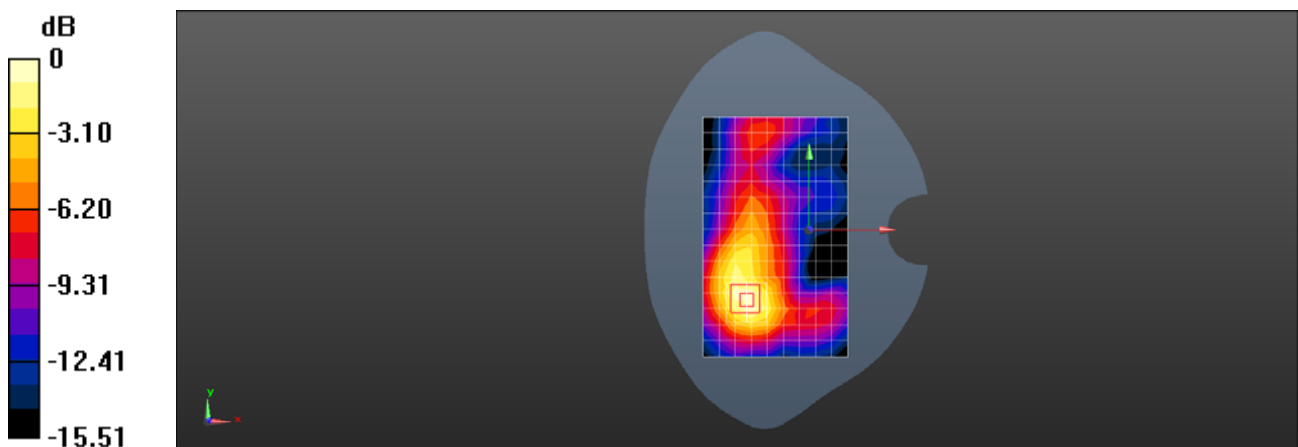

0 dB = 0.605 W/kg = -2.18 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G ENDC LTE Band 7 20M QPSK 50RB50 21100CH Right side 10mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026242

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/Body/Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.402 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.337 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.668 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.178 W/kg

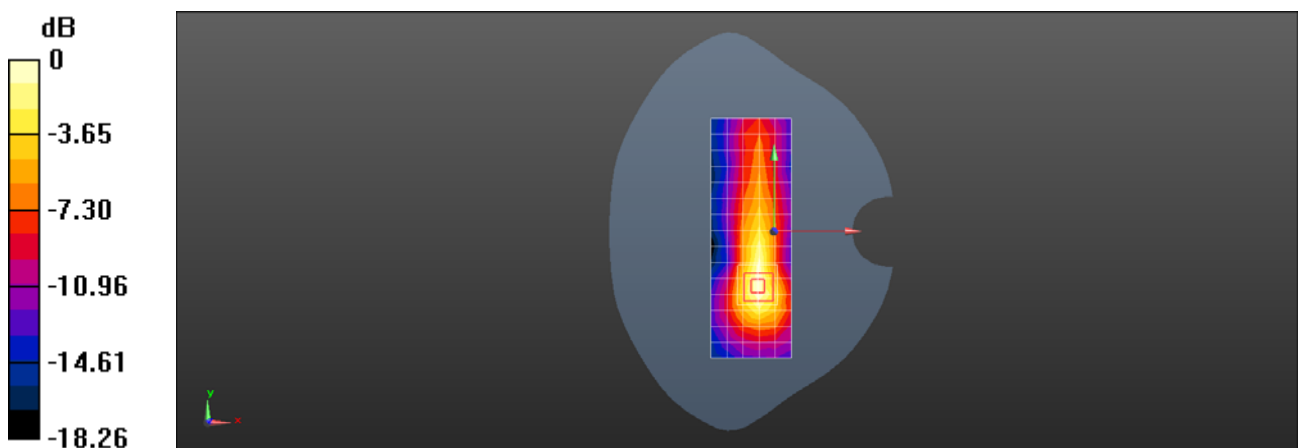

0 dB = 0.402 W/kg = -3.96 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 12 10M QPSK 25RB25 23095CH Right cheek Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 42.919$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.73, 10.73, 10.73); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.811 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.63 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.835 W/kg

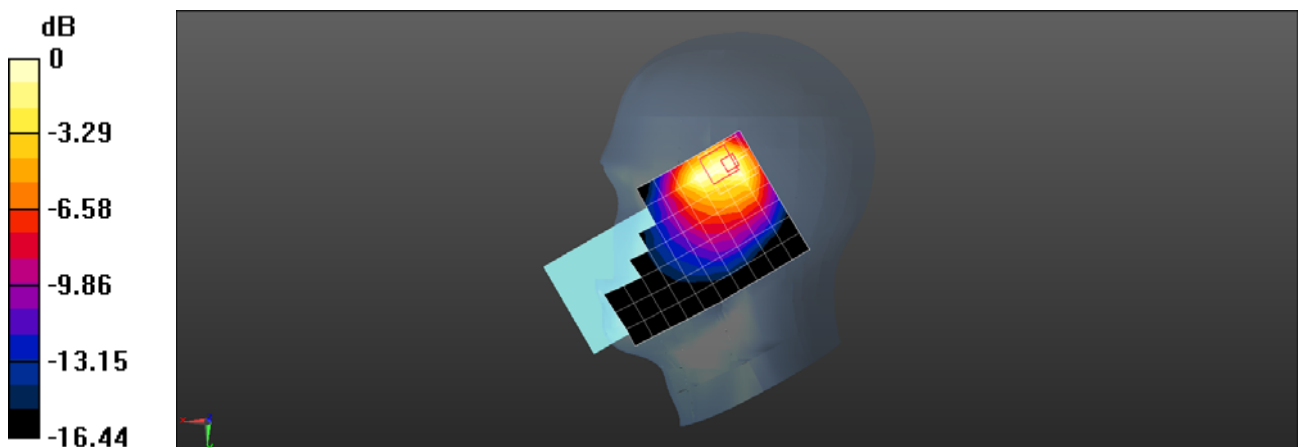

0 dB = 0.835 W/kg = -0.78 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 12 10M QPSK 1RB49 23130CH Back side 15mm Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.859 \text{ S/m}$; $\epsilon_r = 42.883$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.73, 10.73, 10.73); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.185 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.91 V/m ; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.165 W/kg ; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.188 W/kg

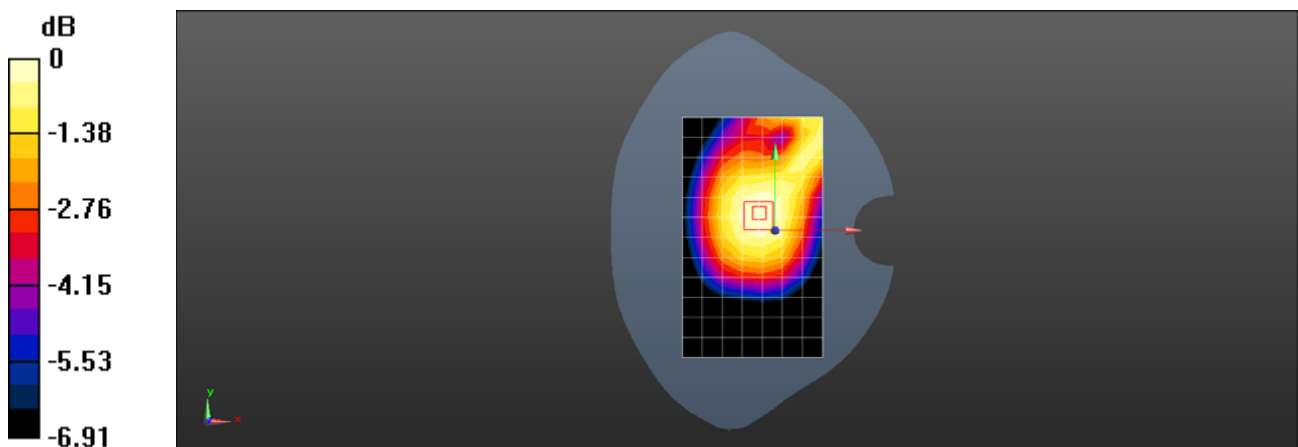

0 dB = 0.188 W/kg = -7.26 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 12 10M QPSK 25RB25 23095CH Left side 10mm Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 42.919$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.73, 10.73, 10.73); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.346 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.86 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.442 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.355 W/kg

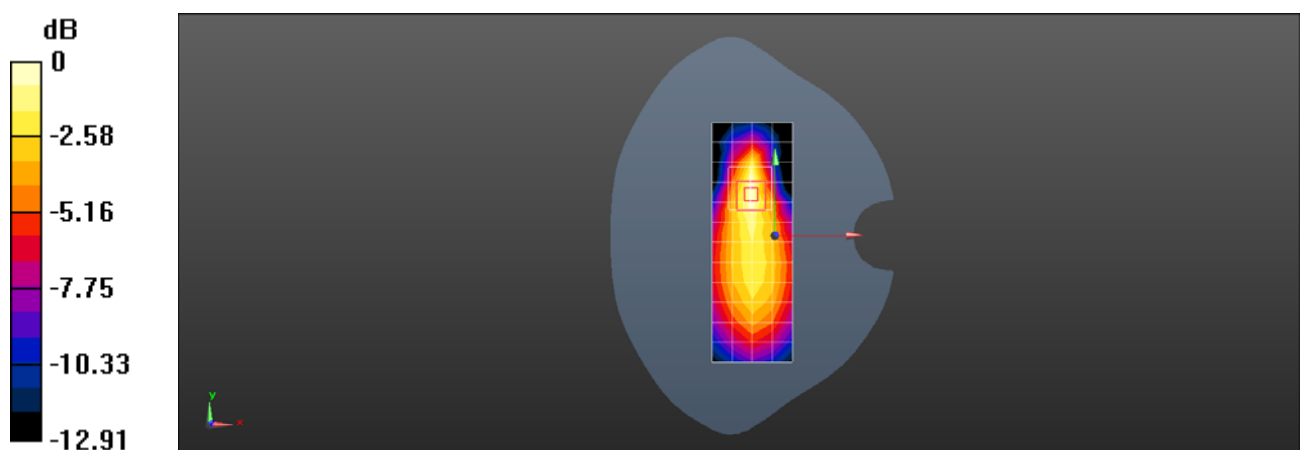

0 dB = 0.355 W/kg = -4.50 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 12 10M QPSK 1RB25 23130CH Left cheek Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.859 \text{ S/m}$; $\epsilon_r = 42.883$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.73, 10.73, 10.73); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0579 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.068 V/m ; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0670 W/kg

SAR(1 g) = 0.053 W/kg ; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0594 W/kg

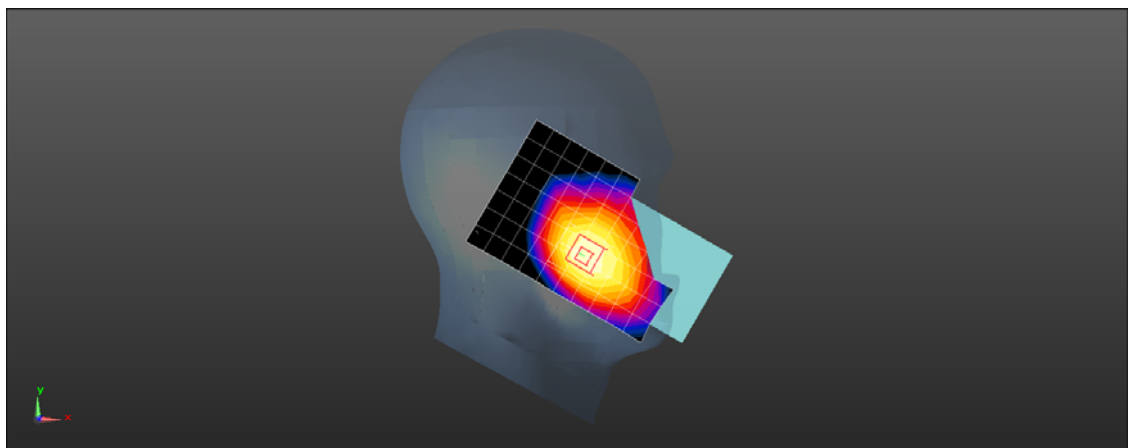

0 dB = 0.0594 W/kg = -12.26 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 12 10M QPSK 1RB25 23130CH Back side 15mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.859 \text{ S/m}$; $\epsilon_r = 42.883$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.73, 10.73, 10.73); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.139 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.05 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.119 W/kg ; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.145 W/kg

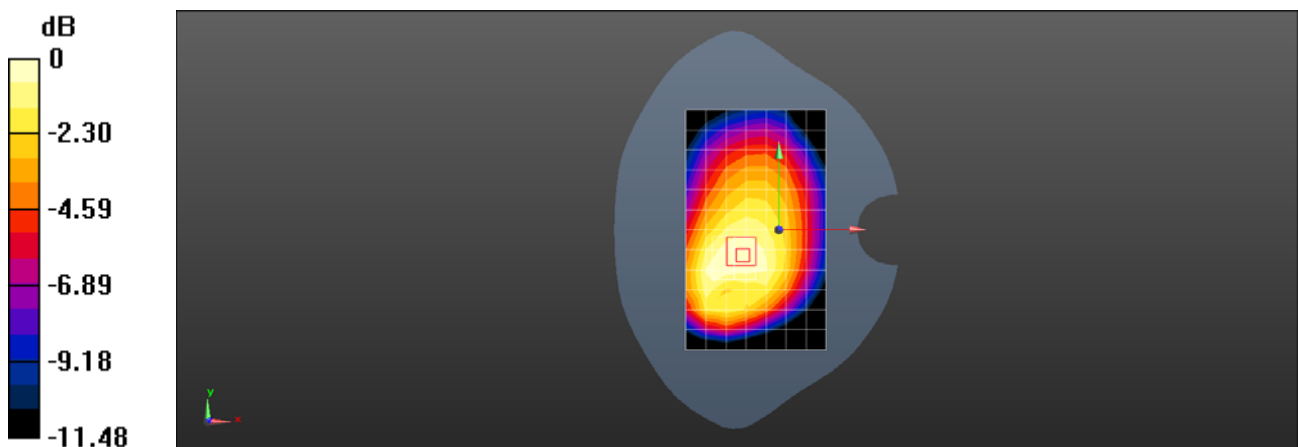

0 dB = 0.145 W/kg = -8.39 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 12 10M QPSK 1RB25 23130CH Back side 10mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.859 \text{ S/m}$; $\epsilon_r = 42.883$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.73, 10.73, 10.73); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.232 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.55 V/m ; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.320 W/kg

SAR(1 g) = 0.180 W/kg ; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.249 W/kg

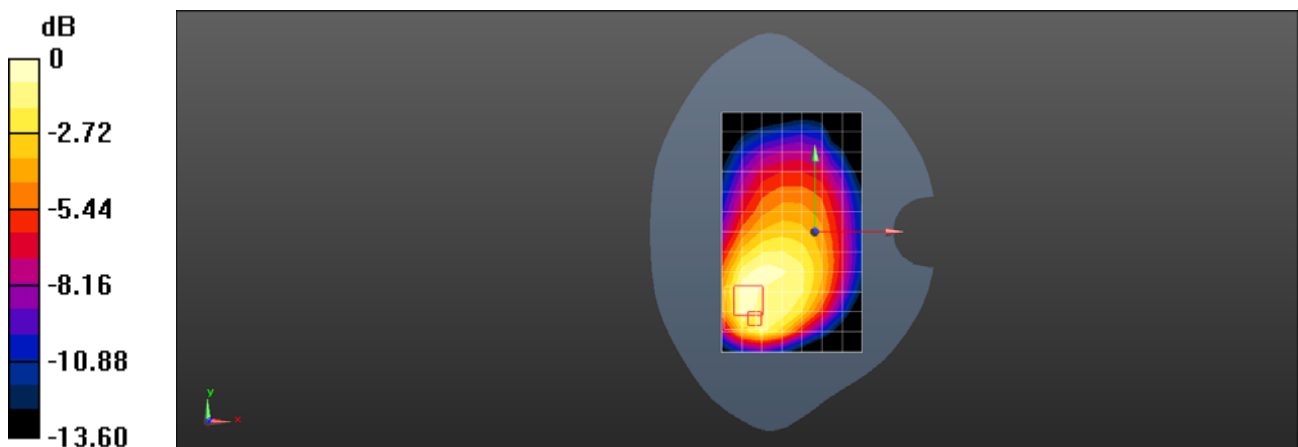

$0 \text{ dB} = 0.249 \text{ W/kg} = -6.04 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 17 10M QPSK 25RB25 23780CH Right cheek Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 709 \text{ MHz}$; $\sigma = 0.858 \text{ S/m}$; $\epsilon_r = 42.903$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.73, 10.73, 10.73); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.795 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.59 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.506 W/kg ; SAR(10 g) = 0.266 W/kg

Maximum value of SAR (measured) = 0.825 W/kg

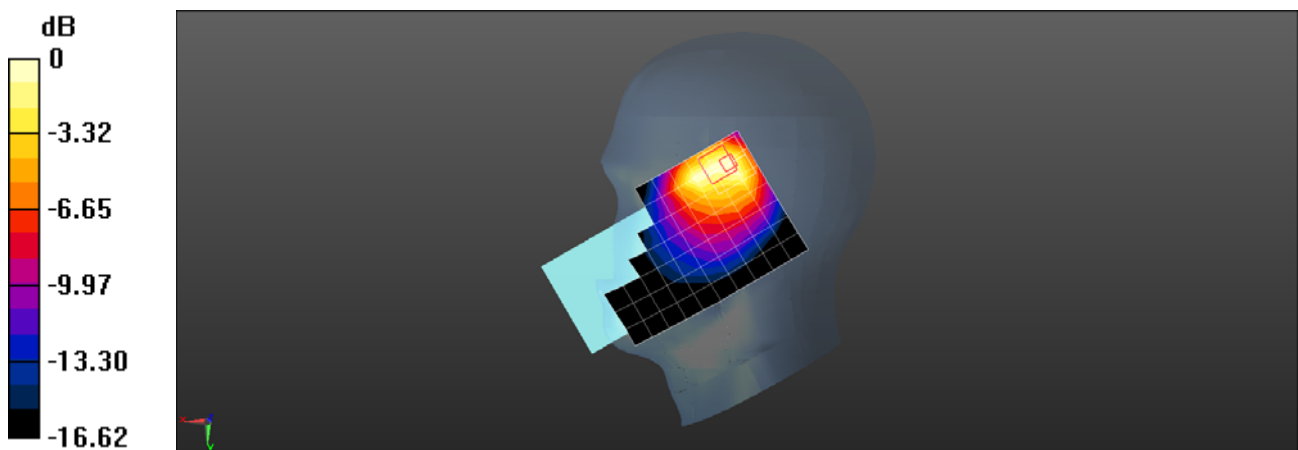

$0 \text{ dB} = 0.825 \text{ W/kg} = -0.84 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 17 10M QPSK 1RB49 23780CH Back side 15mm Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 709 \text{ MHz}$; $\sigma = 0.858 \text{ S/m}$; $\epsilon_r = 42.903$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.73, 10.73, 10.73); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.190 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.88 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.166 W/kg ; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.188 W/kg

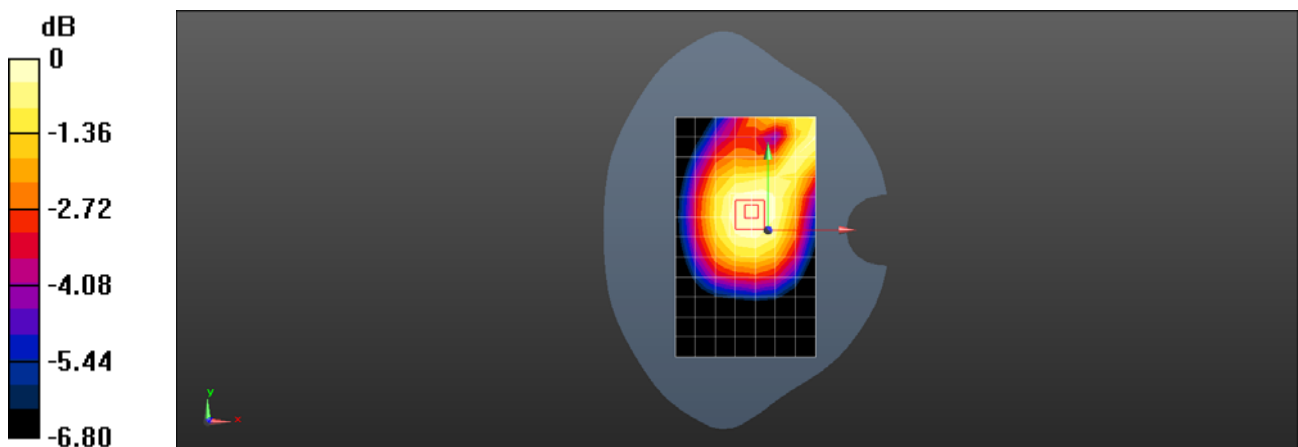

0 dB = 0.188 W/kg = -7.26 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 17 10M QPSK 25RB25 23780CH Left side 10mm Ant2

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 709 \text{ MHz}$; $\sigma = 0.858 \text{ S/m}$; $\epsilon_r = 42.903$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.73, 10.73, 10.73); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.351 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.51 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.269 W/kg ; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.361 W/kg

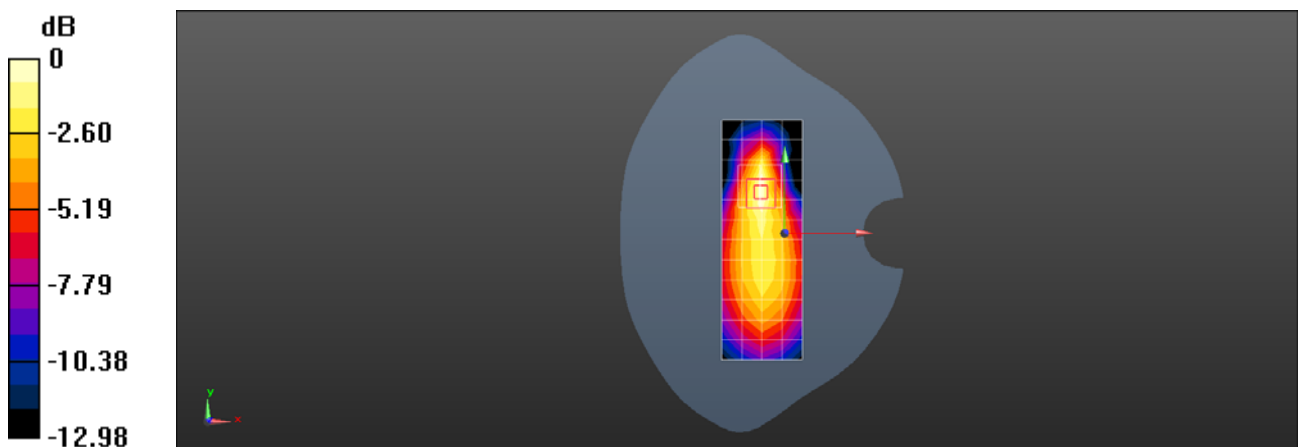

$0 \text{ dB} = 0.361 \text{ W/kg} = -4.42 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 17 10M QPSK 1RB49 23780CH Left cheek Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 709 \text{ MHz}$; $\sigma = 0.858 \text{ S/m}$; $\epsilon_r = 42.903$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.73, 10.73, 10.73); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0541 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.706 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0610 W/kg

SAR(1 g) = 0.048 W/kg ; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0544 W/kg

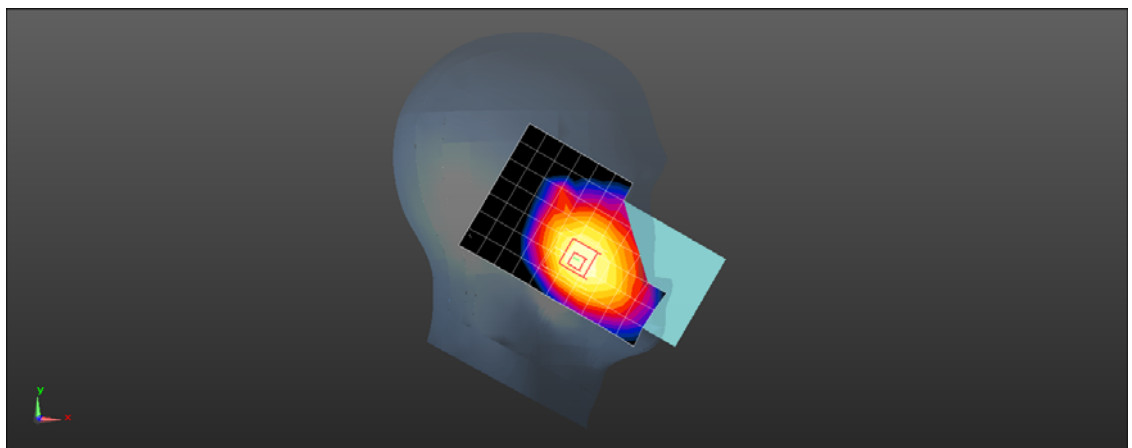

0 dB = 0.0544 W/kg = -12.64 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 17 10M QPSK 1RB49 23780CH Back side 15mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 709 \text{ MHz}$; $\sigma = 0.858 \text{ S/m}$; $\epsilon_r = 42.903$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.73, 10.73, 10.73); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.140 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.827 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.118 W/kg ; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.142 W/kg

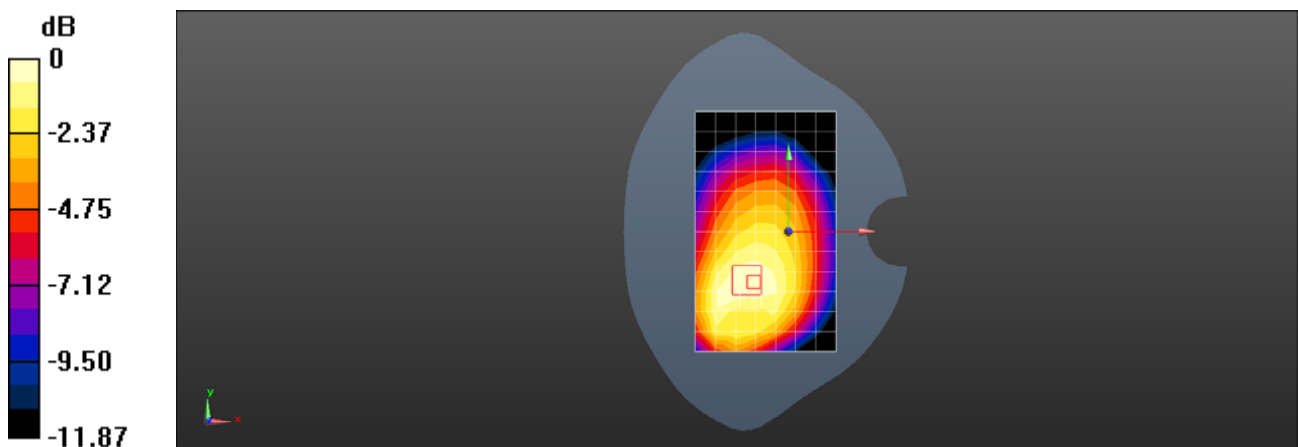

0 dB = 0.142 W/kg = -8.48 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 17 10M QPSK 1RB49 23780CH Back side 10mm Ant10

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026465

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 709 \text{ MHz}$; $\sigma = 0.858 \text{ S/m}$; $\epsilon_r = 42.903$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.73, 10.73, 10.73); Calibrated: 2020/10/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.264 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.77 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.187 W/kg ; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.258 W/kg

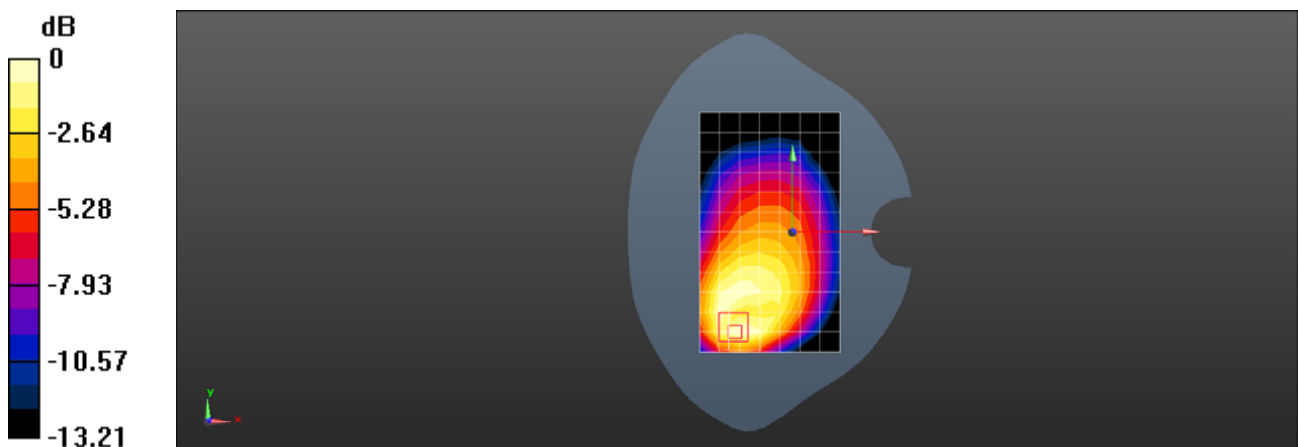

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 38 20M QPSK 1RB50 37850CH Left cheek Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2580 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2580$ MHz; $\sigma = 1.948$ S/m; $\epsilon_r = 39.93$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.244 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.316 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

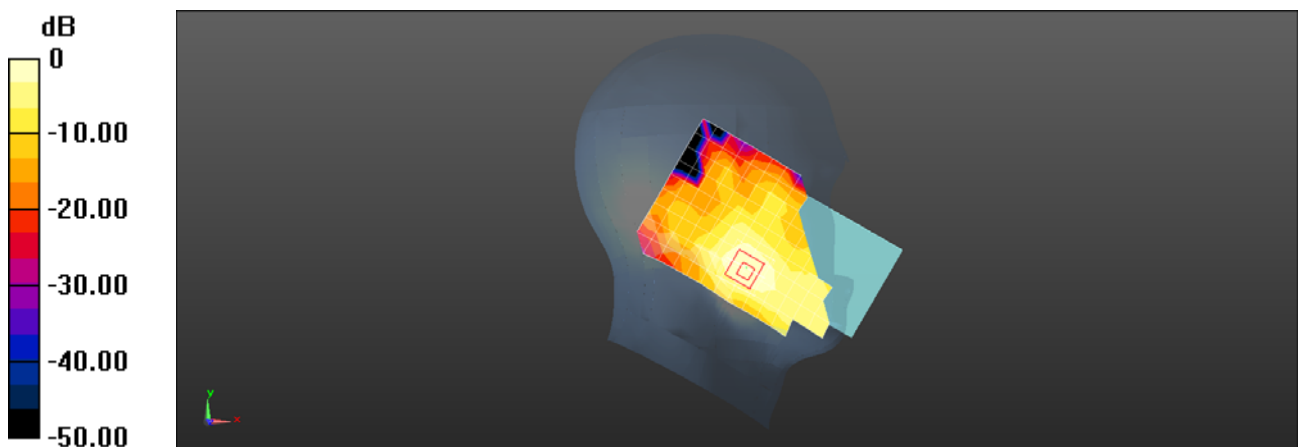

0 dB = 0.231 W/kg = -6.36 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 38 20M QPSK 1RB50 37850CH Back side 15mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2580 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2580$ MHz; $\sigma = 1.948$ S/m; $\epsilon_r = 39.93$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.433 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.711 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.599 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.451 W/kg

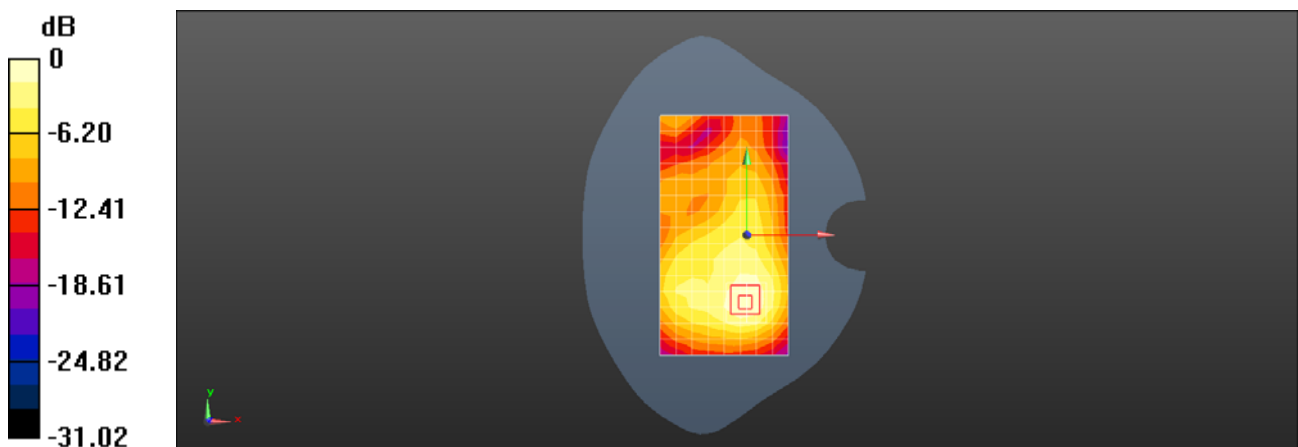

0 dB = 0.451 W/kg = -3.46 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 38 20M QPSK 50RB0 38150CH Back side 10mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2610 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2610$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 39.825$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.444 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.298 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.470 W/kg

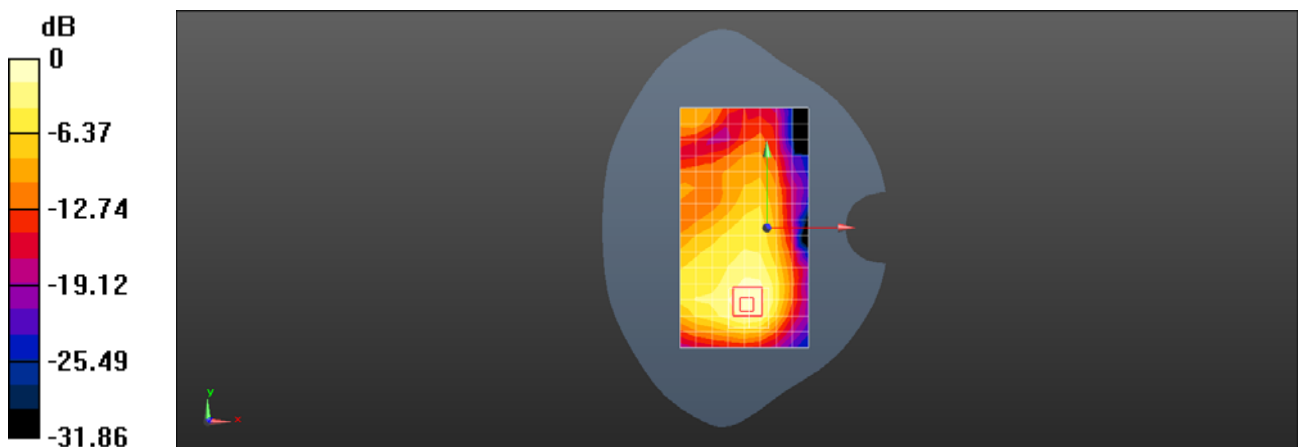

0 dB = 0.470 W/kg = -3.28 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 38 20M QPSK 50RB25 38000CH Right tilted Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 39.878$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.542 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.056 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.867 W/kg

SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.554 W/kg

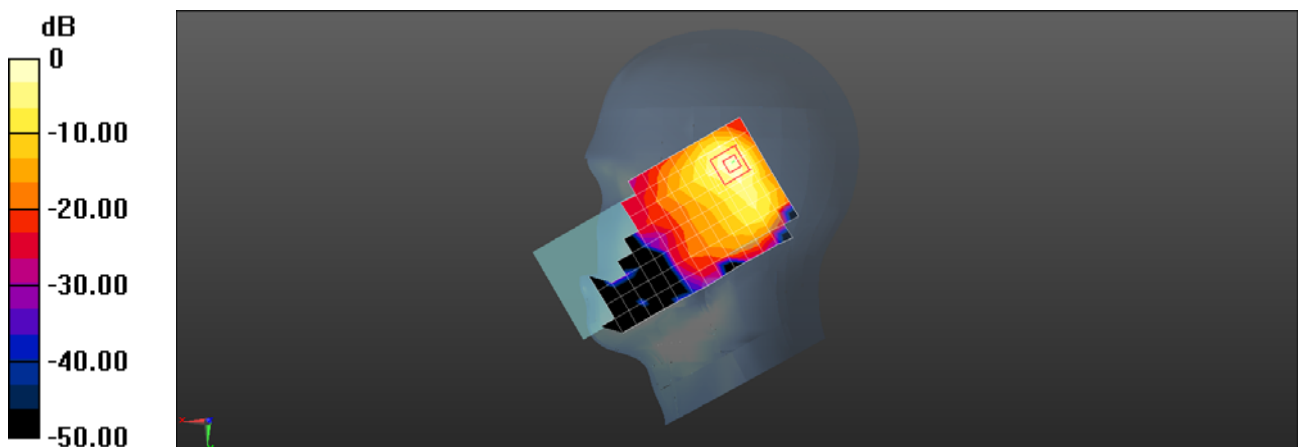

0 dB = 0.554 W/kg = -2.56 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 38 20M QPSK 1RB0 38150CH Back side 15mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2610 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2610$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 39.825$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.183 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.682 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.194 W/kg

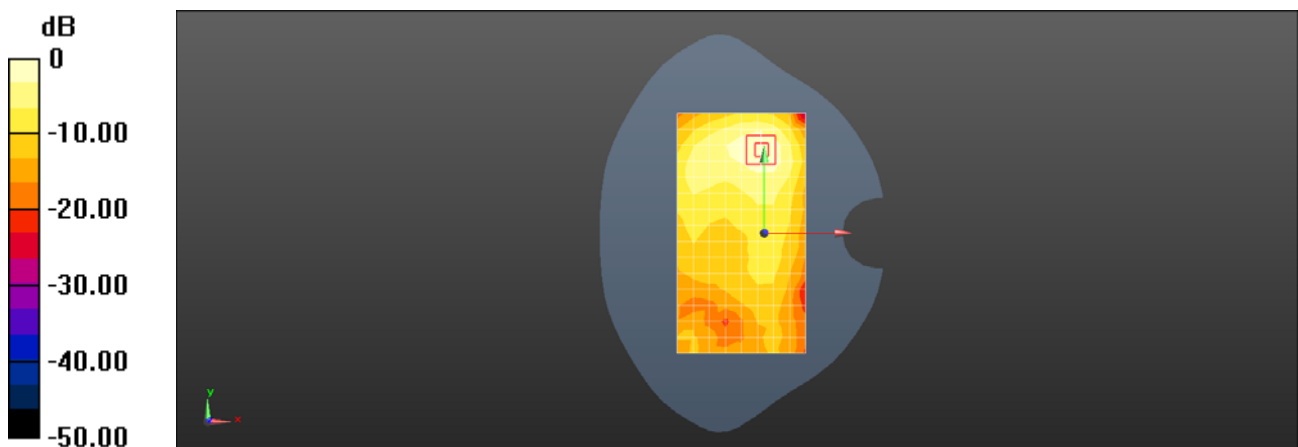

0 dB = 0.194 W/kg = -7.12 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 38 20M QPSK 50RB25 38000CH Back side 10mm Ant4

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 39.878$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.172 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.309 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.048 W/kg

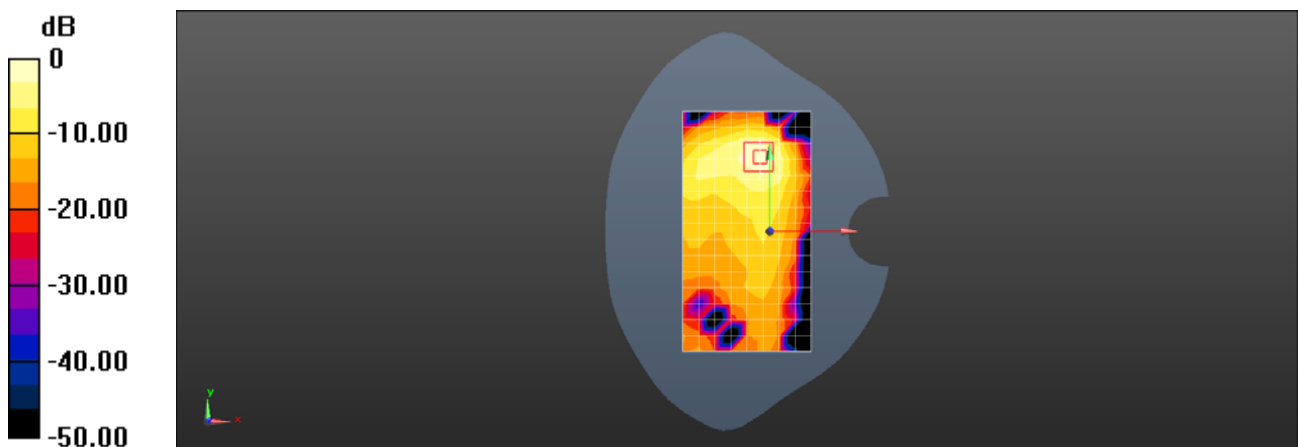

0 dB = 0.172 W/kg = -7.64 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 38 20M QPSK 1RB50 38000CH Left cheek Ant8

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 39.878$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.660 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.860 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.521 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.940 W/kg

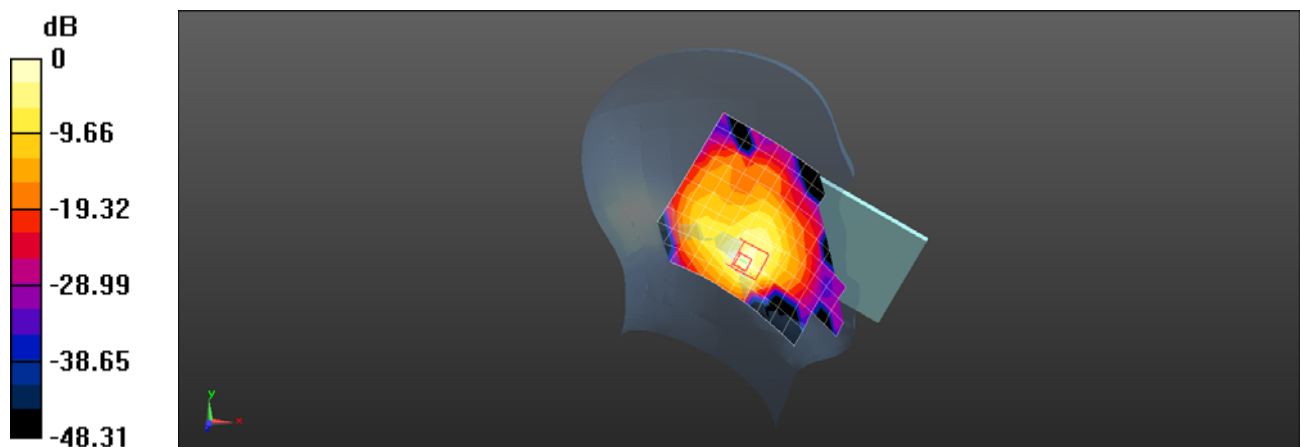

0 dB = 0.940 W/kg = -0.27 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 38 20M QPSK 50RB25 38000CH Back side 15mm Ant8

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 39.878$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.116 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.018 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.043 W/kg

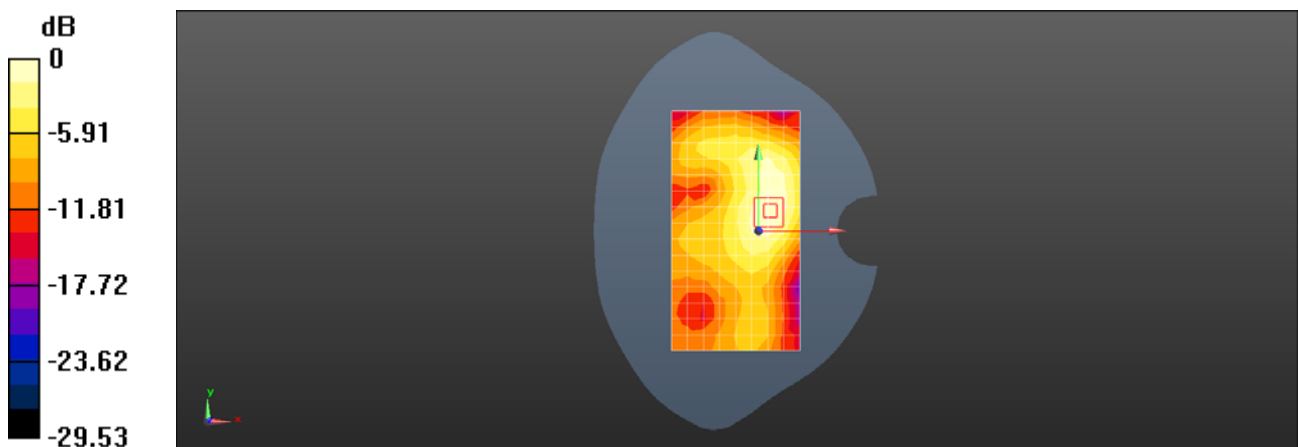

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 38 20M QPSK 50RB25 38000CH Left side 10mm Ant8

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 39.878$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.385 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.691 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.408 W/kg

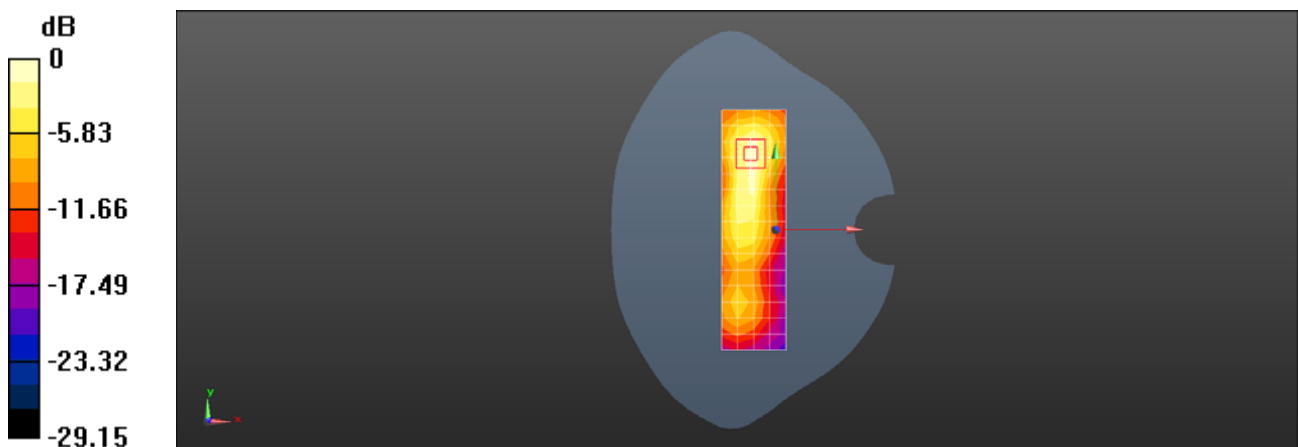

0 dB = 0.408 W/kg = -3.89 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 38 20M QPSK 1RB0 38000CH Right cheek Ant9

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 39.878$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.243 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.936 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.366 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.245 W/kg

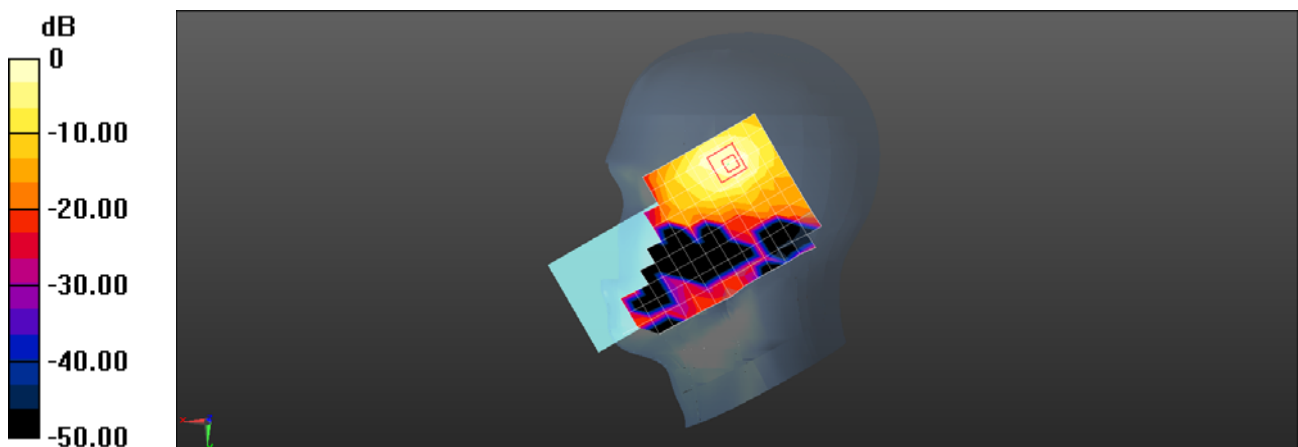

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 38 20M QPSK 1RB99 37850CH Back side 15mm Ant9

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2580 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2580$ MHz; $\sigma = 1.948$ S/m; $\epsilon_r = 39.93$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.246 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.385 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.350 W/kg

SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.260 W/kg

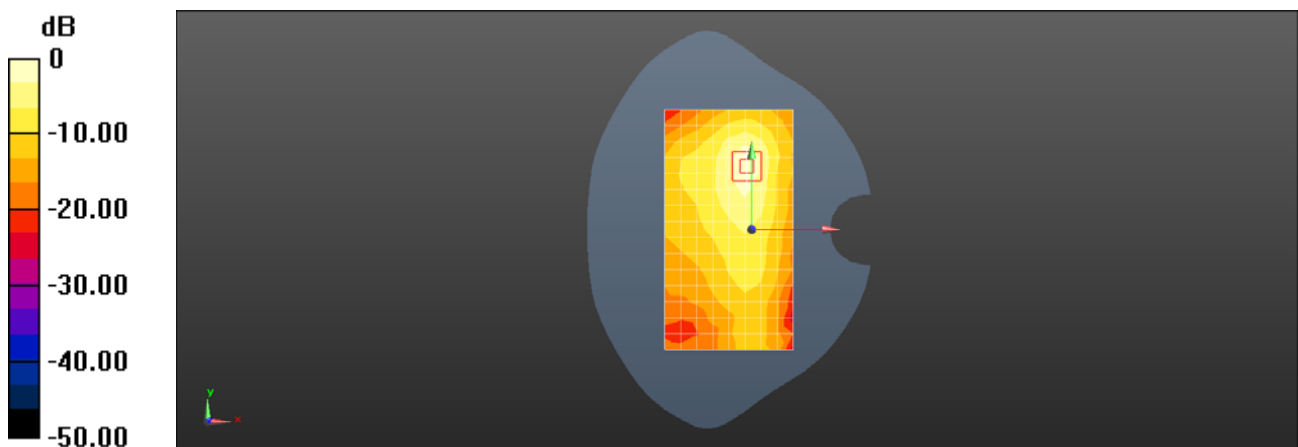

0 dB = 0.260 W/kg = -5.85 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 38 20M QPSK 50RB25 38150CH Back side 10mm Ant9

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2610 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2610$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 39.825$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.227 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.666 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.269 W/kg

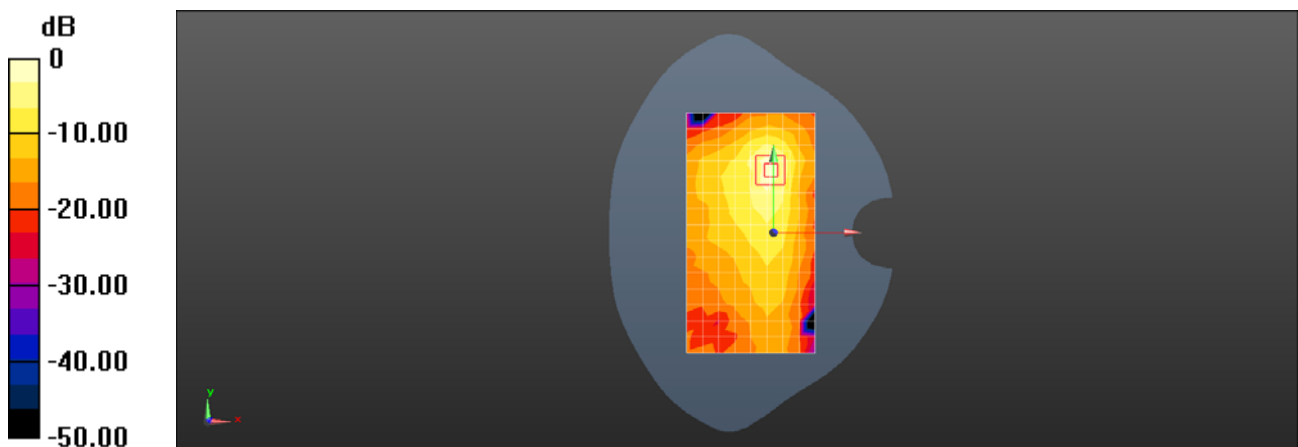

0 dB = 0.269 W/kg = -5.70 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 41 20M QPSK 1RB0 39750CH Left cheek Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2506$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 39.773$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.233 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.492 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.234 W/kg

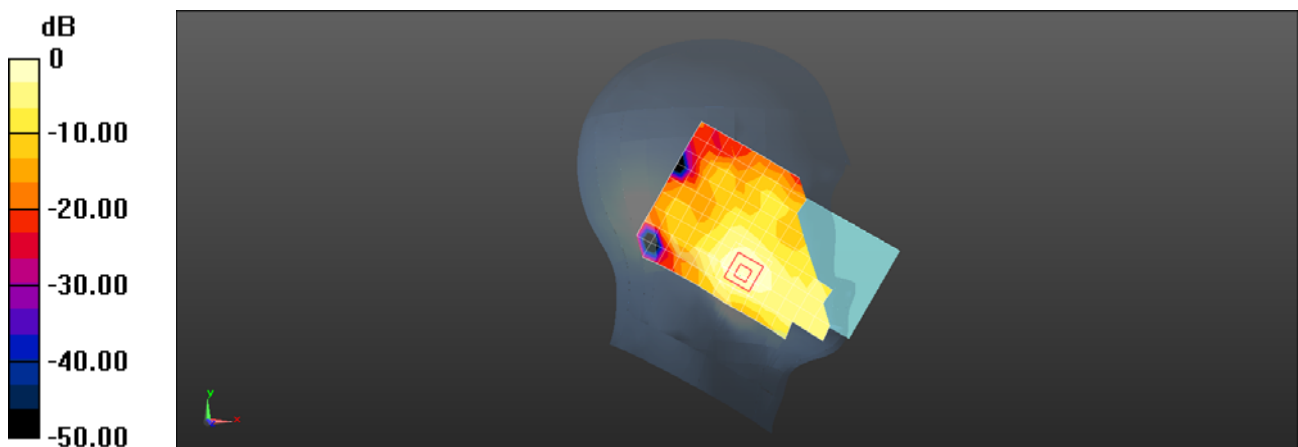

0 dB = 0.234 W/kg = -6.31 dBW/kg

Test Laboratory: SGS-SAR Lab

M2012K11G LTE Band 41 20M QPSK 1RB0 39750CH Back side 15mm Ant1

DUT: M2012K11G; Type: Mobile Phone; Serial: 865970050026317

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2506$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 39.773$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.42, 7.42, 7.42); Calibrated: 2020/04/01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2020/06/12
- Phantom: SAM 11; Type: SAM; Serial: 1410
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.404 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.542 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.564 W/kg

SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.426 W/kg

