



CERTIFICATION TEST REPORT

Report Number. : 11792476-E5V2

Applicant : APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Model : A1902

FCC ID : BCG-E3176A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E

Date Of Issue:
August 23, 2017

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	08/10/2017	Initial Issue	Chin Pang
V2	08/21/2017	Address TCB's Questions	Chin Pang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	11
2. TEST METHODOLOGY	12
3. FACILITIES AND ACCREDITATION	12
4. CALIBRATION AND UNCERTAINTY	13
4.1. MEASURING INSTRUMENT CALIBRATION	13
4.2. SAMPLE CALCULATION	13
4.3. MEASUREMENT UNCERTAINTY	13
5. EQUIPMENT UNDER TEST.....	14
5.1. DESCRIPTION OF EUT	14
5.2. MAXIMUM OUTPUT POWER	14
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	17
5.4. SOFTWARE AND FIRMWARE	17
5.5. WORST-CASE CONFIGURATION AND MODE.....	18
5.6. DESCRIPTION OF TEST SETUP	19
6. TEST AND MEASUREMENT EQUIPMENT	25
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	26
7.1. ON TIME AND DUTY CYCLE.....	26
7.2. MEASUREMENT METHODS	30
8. ANTENNA PORT TEST RESULTS.....	31
8.1. 11n HT20 UAT 2 SISO MODE IN THE 5.2GHz BAND	31
8.1.1. 26 dB BANDWIDTH	31
8.1.2. 99% BANDWIDTH.....	34
8.1.3. AVERAGE POWER.....	37
8.1.4. OUTPUT POWER AND PPSD	38
8.2. 11n HT20 LAT 3 SISO MODE IN THE 5.2GHz BAND.....	42
8.2.1. 26 dB BANDWIDTH	42
8.2.2. 99% BANDWIDTH.....	45
8.2.3. AVERAGE POWER.....	48
8.2.4. OUTPUT POWER AND PPSD	49
8.3. 11n HT20 2TX CDD MIMO MODE IN THE 5.2GHz BAND	53
8.3.1. 26 dB BANDWIDTH	53
8.3.2. 99% BANDWIDTH.....	57
8.3.3. AVERAGE POWER.....	61
8.3.4. OUTPUT POWER AND PPSD	62
8.4. 11n HT40 UAT 2 SISO MODE IN THE 5.2GHz BAND	68

8.4.1.	26 dB BANDWIDTH	68
8.4.2.	99% BANDWIDTH.....	70
8.4.3.	AVERAGE POWER.....	72
8.4.4.	OUTPUT POWER AND PPSD	73
8.5.	<i>11n HT40 LAT 3 SISO MODE IN THE 5.2GHz BAND</i>	76
8.5.1.	26 dB BANDWIDTH	76
8.5.2.	99% BANDWIDTH.....	78
8.5.3.	AVERAGE POWER.....	80
8.5.4.	OUTPUT POWER AND PPSD	81
8.6.	<i>11n HT40 2TX CDD MIMO MODE IN THE 5.2GHz BAND</i>	84
8.6.1.	26 dB BANDWIDTH	84
8.6.2.	99% BANDWIDTH.....	87
8.6.3.	AVERAGE POWER.....	90
8.6.4.	OUTPUT POWER AND PPSD	91
8.7.	<i>11ac HT80 UAT 2 SISO MODE IN THE 5.2GHz BAND</i>	96
8.7.1.	26 dB BANDWIDTH	96
8.7.2.	99% BANDWIDTH.....	98
8.7.3.	AVERAGE POWER.....	100
8.7.4.	OUTPUT POWER AND PPSD	101
8.8.	<i>11ac HT80 LAT 3 SISO MODE IN THE 5.2GHz BAND</i>	104
8.8.1.	26 dB BANDWIDTH	104
8.8.2.	99% BANDWIDTH.....	106
8.8.3.	AVERAGE POWER.....	108
8.8.4.	OUTPUT POWER AND PPSD	109
8.9.	<i>11ac HT80 2TX CDD MIMO MODE IN THE 5.2GHz BAND</i>	112
8.9.1.	26 dB BANDWIDTH	112
8.9.2.	99% BANDWIDTH.....	114
8.9.3.	AVERAGE POWER.....	116
8.9.4.	OUTPUT POWER AND PPSD	117
8.10.	<i>11n HT20 UAT 2 SISO MODE IN THE 5.3GHz BAND</i>	121
8.10.1.	26 dB BANDWIDTH.....	121
8.10.2.	99% BANDWIDTH.....	124
8.10.3.	AVERAGE POWER	127
8.10.4.	OUTPUT POWER AND PPSD.....	128
8.11.	<i>11n HT20 LAT 3 SISO MODE IN THE 5.3GHz BAND</i>	132
8.11.1.	26 dB BANDWIDTH.....	132
8.11.2.	99% BANDWIDTH.....	135
8.11.3.	AVERAGE POWER	138
8.11.4.	OUTPUT POWER AND PPSD.....	139
8.12.	<i>11n HT20 2TX CDD MIMO MODE IN THE 5.3GHz BAND</i>	143
8.12.1.	26 dB BANDWIDTH.....	143
8.12.2.	99% BANDWIDTH.....	147
8.12.3.	AVERAGE POWER	151
8.12.4.	OUTPUT POWER AND PPSD.....	152
8.13.	<i>11n HT40 UAT 2 SISO MODE IN THE 5.3GHz BAND</i>	157
8.13.1.	26 dB BANDWIDTH.....	157
8.13.2.	99% BANDWIDTH.....	159
8.13.3.	AVERAGE POWER	161
8.13.4.	OUTPUT POWER AND PPSD.....	162

8.14.	11n HT40 LAT 3 SISO MODE IN THE 5.3GHz BAND	165
8.14.1.	26 dB BANDWIDTH	165
8.14.2.	99% BANDWIDTH	167
8.14.3.	AVERAGE POWER	169
8.14.4.	OUTPUT POWER AND PPSD	170
8.15.	11n HT40 2TX CDD MIMO MODE IN THE 5.3GHz BAND	173
8.15.1.	26 dB BANDWIDTH	173
8.15.2.	99% BANDWIDTH	176
8.15.3.	AVERAGE POWER	179
8.15.4.	OUTPUT POWER AND PPSD	180
8.16.	11ac HT80 UAT 2 SISO MODE IN THE 5.3GHz BAND	184
8.16.1.	26 dB BANDWIDTH	184
8.16.2.	99% BANDWIDTH	186
8.16.3.	AVERAGE POWER	188
8.16.4.	OUTPUT POWER AND PPSD	189
8.17.	11ac HT80 LAT 3 SISO MODE IN THE 5.3GHz BAND	192
8.17.1.	26 dB BANDWIDTH	192
8.17.2.	99% BANDWIDTH	194
8.17.3.	AVERAGE POWER	196
8.17.4.	OUTPUT POWER AND PPSD	197
8.18.	11ac HT80 2TX CDD MIMO MODE IN THE 5.3GHz BAND	200
8.18.1.	26 dB BANDWIDTH	200
8.18.2.	99% BANDWIDTH	202
8.18.3.	AVERAGE POWER	204
8.18.4.	OUTPUT POWER AND PPSD	205
8.19.	11n HT20 UAT 2 SISO MODE IN THE 5.6GHz BAND	208
8.19.1.	99% BANDWIDTH	208
8.19.2.	26 dB BANDWIDTH	211
8.19.3.	AVERAGE POWER	214
8.19.4.	OUTPUT POWER AND PPSD	215
8.19.5.	11ac HT20 UAT 2 SISO STRADDLE CHANNEL 144	219
8.19.6.	6 dB BANDWIDTH	223
8.20.	11n HT20 LAT 3 SISO MODE IN THE 5.6GHz BAND	224
8.20.1.	26 dB BANDWIDTH	224
8.20.2.	99% BANDWIDTH	227
8.20.3.	AVERAGE POWER	230
8.20.4.	OUTPUT POWER AND PPSD	231
8.20.5.	11ac HT20 LAT 3 SISO STRADDLE CHANNEL 144	235
8.20.6.	6 dB BANDWIDTH	239
8.21.	11n HT20 2TX CDD MIMO MODE IN THE 5.6GHz BAND	240
8.21.1.	26 dB BANDWIDTH	240
8.21.2.	99% BANDWIDTH	245
8.21.3.	AVERAGE POWER	250
8.21.4.	OUTPUT POWER AND PPSD	251
8.21.5.	11ac HT20 2TX CDD MIMO STRADDLE CHANNEL 144	256
8.21.6.	6 dB BANDWIDTH	262
8.22.	11n HT40 UAT 2 SISO MODE IN THE 5.6GHz BAND	264
8.22.1.	26 dB BANDWIDTH	264
8.22.2.	99% BANDWIDTH	267

8.22.3.	AVERAGE POWER	270
8.22.4.	OUTPUT POWER AND PPSD.....	271
8.22.5.	11ac HT40 UAT 2 SISO STRADDLE CHANNEL 142	275
8.22.6.	6 dB BANDWIDTH.....	279
8.23.	<i>11n HT40 LAT 3 SISO MODE IN THE 5.6GHz BAND</i>	<i>280</i>
8.23.1.	26 dB BANDWIDTH.....	280
8.23.2.	99% BANDWIDTH.....	283
8.23.3.	AVERAGE POWER	286
8.23.4.	OUTPUT POWER AND PPSD.....	287
8.23.5.	11ac HT40 LAT 3 SISO STRADDLE CHANNEL 142	291
8.23.6.	6 dB BANDWIDTH.....	295
8.24.	<i>11n HT40 2TX CDD MIMO MODE IN THE 5.6GHz BAND.....</i>	<i>296</i>
8.24.1.	26 dB BANDWIDTH.....	296
8.24.2.	99% BANDWIDTH.....	301
8.24.3.	AVERAGE POWER	306
8.24.4.	OUTPUT POWER AND PPSD.....	307
8.24.5.	11ac HT40 2TX CDD MIMO STRADDLE CHANNEL 142	313
8.24.6.	6 dB BANDWIDTH.....	319
8.25.	<i>11ac HT80 UAT 2 SISO MODE IN THE 5.6GHz BAND</i>	<i>321</i>
8.25.1.	26 dB BANDWIDTH.....	321
8.25.2.	99% BANDWIDTH.....	324
8.25.3.	AVERAGE POWER	327
8.25.4.	OUTPUT POWER AND PPSD.....	328
8.25.5.	STRADDLE CHANNEL 138 RESULTS.....	331
8.25.6.	6 dB BANDWIDTH.....	335
8.26.	<i>11ac HT80 LAT 3 SISO MODE IN THE 5.6GHz BAND.....</i>	<i>336</i>
8.26.1.	26 dB BANDWIDTH.....	336
8.26.2.	99% BANDWIDTH.....	339
8.26.3.	AVERAGE POWER	342
8.26.4.	OUTPUT POWER AND PPSD.....	343
8.26.5.	STRADDLE CHANNEL 138 RESULTS.....	346
8.26.6.	6 dB BANDWIDTH.....	350
8.27.	<i>11ac HT80 2TX CDD MIMO MODE IN THE 5.6GHz BAND.....</i>	<i>351</i>
8.27.1.	26 dB BANDWIDTH.....	351
8.27.2.	99% BANDWIDTH.....	355
8.27.3.	AVERAGE POWER	359
8.27.4.	OUTPUT POWER AND PPSD.....	360
8.27.5.	STRADDLE CHANNEL 138 RESULTS.....	364
8.27.6.	6 dB BANDWIDTH.....	370
8.28.	<i>11n HT20 UAT 2 SISO MODE IN THE 5.8GHz BAND.....</i>	<i>372</i>
8.28.1.	6 dB BANDWIDTH.....	372
8.28.2.	26 dB BANDWIDTH.....	375
8.28.3.	99% BANDWIDTH.....	378
8.28.4.	AVERAGE POWER	381
8.28.5.	OUTPUT POWER.....	382
8.28.6.	POWER SPECTRAL DENSITY	384
8.29.	<i>11n HT20 LAT 3 SISO MODE IN THE 5.8GHz BAND</i>	<i>388</i>
8.29.1.	6 dB BANDWIDTH.....	388
8.29.2.	26 dB BANDWIDTH.....	391
8.29.3.	99% BANDWIDTH.....	394

8.29.4.	AVERAGE POWER	397
8.29.5.	OUTPUT POWER.....	398
8.29.6.	POWER SPECTRAL DENSITY	400
8.30.	<i>11n HT20 2TX CDD MIMO MODE IN THE 5.8GHz BAND.....</i>	<i>404</i>
8.30.1.	6 dB BANDWIDTH.....	404
8.30.2.	26 dB BANDWIDTH.....	408
8.30.3.	99% BANDWIDTH.....	412
8.30.4.	AVERAGE POWER	416
8.30.5.	OUTPUT POWER.....	417
8.30.6.	POWER SPECTRAL DENSITY	419
8.31.	<i>11n HT40 UAT 2 SISO MODE IN THE 5.8GHz BAND.....</i>	<i>424</i>
8.31.1.	6 dB BANDWIDTH.....	424
8.31.2.	26 dB BANDWIDTH.....	426
8.31.3.	99% BANDWIDTH.....	428
8.31.4.	AVERAGE POWER	430
8.31.5.	OUTPUT POWER.....	431
8.31.6.	POWER SPECTRAL DENSITY	433
8.32.	<i>11n HT40 LAT 3 SISO MODE IN THE 5.8GHz BAND</i>	<i>436</i>
8.32.1.	6 dB BANDWIDTH.....	436
8.32.2.	26 dB BANDWIDTH.....	438
8.32.3.	99% BANDWIDTH.....	440
8.32.4.	AVERAGE POWER	442
8.32.5.	OUTPUT POWER.....	443
8.32.6.	POWER SPECTRAL DENSITY	445
8.33.	<i>11n HT40 2TX CDD MIMO MODE IN THE 5.8GHz BAND.....</i>	<i>448</i>
8.33.1.	6 dB BANDWIDTH.....	448
8.33.2.	26 dB BANDWIDTH.....	451
8.33.3.	99% BANDWIDTH.....	454
8.33.4.	AVERAGE POWER	457
8.33.5.	OUTPUT POWER.....	458
8.33.6.	POWER SPECTRAL DENSITY	460
8.34.	<i>11ac HT80 UAT 2 SISO MODE IN THE 5.8GHz BAND</i>	<i>464</i>
8.34.1.	6 dB BANDWIDTH.....	464
8.34.2.	26 dB BANDWIDTH.....	466
8.34.3.	99% BANDWIDTH.....	468
8.34.4.	AVERAGE POWER	470
8.34.5.	OUTPUT POWER.....	471
8.34.6.	POWER SPECTRAL DENSITY	473
8.35.	<i>11ac HT80 LAT 3 SISO MODE IN THE 5.8GHz BAND.....</i>	<i>476</i>
8.35.1.	6 dB BANDWIDTH.....	476
8.35.2.	26 dB BANDWIDTH.....	478
8.35.3.	99% BANDWIDTH.....	480
8.35.4.	AVERAGE POWER	482
8.35.5.	OUTPUT POWER.....	483
8.35.6.	POWER SPECTRAL DENSITY	485
8.36.	<i>11ac HT80 2TX CDD MIMO MODE IN THE 5.8GHz BAND.....</i>	<i>488</i>
8.36.1.	6 dB BANDWIDTH.....	488
8.36.2.	26 dB BANDWIDTH.....	490
8.36.3.	99% BANDWIDTH.....	492
8.36.4.	AVERAGE POWER	494

8.36.5.	OUTPUT POWER.....	495
8.36.6.	POWER SPECTRAL DENSITY	497

9. RADIATED TEST RESULTS 500

9.1.	LIMITS AND PROCEDURE.....	500
9.1.1.	11n HT20 UAT 2 SISO MODE IN THE 5.2GHz BAND	501
9.1.2.	11n HT20 LAT 3 SISO MODE IN THE 5.2GHz BAND	504
9.1.3.	11n HT20 2TX CDD MIMO MODE IN THE 5.2GHz BAND	507
9.1.4.	11n HT40 UAT 2 SISO MODE IN THE 5.2GHz BAND	515
9.1.5.	11n HT40 LAT 3 SISO MODE IN THE 5.2GHz BAND	518
9.1.6.	11n HT40 2TX CDD MIMO MODE IN THE 5.2GHz BAND	521
9.1.7.	11ac HT80 UAT 2 SISO MODE IN THE 5.2GHz BAND	527
9.1.8.	11ac HT80 LAT 3 SISO MODE IN THE 5.2GHz BAND	530
9.1.9.	11ac HT80 2TX CDD MIMO MODE IN THE 5.2GHz BAND	533
9.1.10.	11n HT20 UAT 2 SISO MODE IN THE 5.3GHz BAND.....	537
9.1.11.	11n HT20 LAT 3 SISO MODE IN THE 5.3GHz BAND	540
9.1.12.	11n HT20 2TX CDD MIMO MODE IN THE 5.3GHz BAND	542
9.1.13.	11n HT40 UAT 2 SISO MODE IN THE 5.3GHz BAND	550
9.1.14.	11n HT40 LAT 3 SISO MODE IN THE 5.3GHz BAND	553
9.1.15.	11n HT40 2TX CDD MIMO MODE IN THE 5.3GHz BAND	556
9.1.16.	11ac HT80 UAT 2 SISO MODE IN THE 5.3GHz BAND	562
9.1.17.	11ac HT80 LAT 3 SISO MODE IN THE 5.3GHz BAND.....	565
9.1.18.	11ac HT80 2TX CDD MIMO MODE IN THE 5.3GHz BAND	568
9.1.19.	11n HT20 UAT 2 SISO MODE IN THE 5.6GHz BAND.....	572
9.1.20.	11ac HT20 UAT 2 SISO STRADDLE CHANNEL 144	577
9.1.21.	11n HT20 LAT 3 SISO MODE IN THE 5.6GHz BAND	578
9.1.22.	11ac HT20 LAT 3 SISO STRADDLE CHANNEL 144.....	583
9.1.23.	11n HT20 2TX CDD MIMO MODE IN THE 5.6GHz BAND	584
9.1.24.	11n HT20 2TX CDD MIMO STRADDLE CHANNEL 144.....	594
9.1.25.	11n HT40 UAT 2 SISO MODE IN THE 5.6GHz BAND.....	596
9.1.26.	11n HT40 UAT 2 SISO STRADDLE CHANNEL 142	601
9.1.27.	11n HT40 LAT 3 SISO MODE IN THE 5.6GHz BAND	602
9.1.28.	11n HT40 LAT 3 SISO STRADDLE CHANNEL 142.....	607
9.1.29.	11n HT40 2TX CDD MIMO MODE IN THE 5.6GHz BAND	608
9.1.30.	11n HT40 2TX CDD MIMO STRADDLE CHANNEL 142.....	618
9.1.31.	11ac HT40 2TX CDD MIMO STRADDLE CHANNEL 142	620
9.1.32.	11ac HT80 UAT 2 SISO MODE IN THE 5.6GHz BAND	621
9.1.33.	11ac HT80 UAT 2 SISO STRADDLE CHANNEL 138	623
9.1.34.	11ac HT80 LAT 3 SISO MODE IN THE 5.6GHz BAND.....	624
9.1.35.	11ac HT80 LAT 3 SISO STRADDLE CHANNEL 138	627
9.1.36.	11ac VHT80 2TX CDD MIMO MODE IN THE 5.6GHz BAND	628
9.1.37.	11ac HT80 2TX CDD MIMO STRADDLE CHANNEL 138	634
9.1.38.	11n HT20 UAT 2 SISO MODE IN THE 5.8GHz BAND.....	636
9.1.39.	11n HT20 LAT 3 SISO MODE IN THE 5.8GHz BAND	641
9.1.40.	11n HT20 2TX CDD MIMO MODE IN THE 5.8GHz BAND	646
9.1.41.	11n HT40 UAT 2 SISO MODE IN THE 5.8GHz BAND	656
9.1.42.	11n HT40 LAT 3 SISO MODE IN THE 5.8GHz BAND	661
9.1.43.	11n HT40 2TX CDD MIMO MODE IN THE 5.8GHz BAND	666
9.1.44.	11ac HT80 UAT 2 SISO MODE IN THE 5.8GHz BAND	674
9.1.45.	11ac HT80 LAT 3 SISO MODE IN THE 5.8GHz BAND.....	679
9.1.46.	11ac HT80 2TX CDD MIMO MODE IN THE 5.8GHz BAND	684
9.2.	WORST-CASE BELOW 1 GHz	690

9.3.	WORST-CASE 18 to 26 GHz	692
9.4.	WORST-CASE 26 to 40 GHz	694
10.	AC POWER LINE CONDUCTED EMISSIONS	696
10.1.	EUT POWERED BY AC/DC ADAPTER VIA USB CABLE	697
10.2.	EUT POWERED BY HOST PC VIA USB CABLE	699
11.	DYNAMIC FREQUENCY SELECTION	701
11.1.	OVERVIEW	701
11.1.1.	LIMITS	701
11.1.2.	TEST AND MEASUREMENT SYSTEM	705
11.1.3.	TEST ROOM ENVIRONMENT	707
11.1.4.	TEST AND MEASUREMENT SOFTWARE	707
11.1.5.	SETUP OF EUT (CLIENT MODE)	708
11.1.6.	SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE)	709
11.1.7.	SETUP OF EUT (PEER TO PEER MODE)	710
11.1.8.	DESCRIPTION OF EUT	712
11.2.	CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH	714
11.2.1.	TEST CHANNEL	714
11.2.2.	RADAR WAVEFORM AND TRAFFIC	714
11.2.3.	OVERLAPPING CHANNEL TESTS	717
11.2.4.	MOVE AND CLOSING TIME	717
11.3.	CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH	721
11.3.1.	TEST CHANNEL	721
11.3.2.	RADAR WAVEFORM AND TRAFFIC	721
11.3.3.	OVERLAPPING CHANNEL TESTS	724
11.3.4.	MOVE AND CLOSING TIME	724
11.4.	CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH	728
11.4.1.	TEST CHANNEL	728
11.4.2.	RADAR WAVEFORM AND TRAFFIC	728
11.4.3.	OVERLAPPING CHANNEL TESTS	731
11.4.4.	MOVE AND CLOSING TIME	731
11.4.5.	30-MINUTE NON-OCCUPANCY PERIOD	735
11.5.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH 736	
11.5.1.	TEST CHANNEL	736
11.5.2.	RADAR WAVEFORM AND TRAFFIC	736
11.5.3.	OVERLAPPING CHANNEL TESTS	739
11.5.4.	MOVE AND CLOSING TIME	739
11.6.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH 743	
11.6.1.	TEST CHANNEL	743
11.6.2.	RADAR WAVEFORM AND TRAFFIC	743
11.6.3.	OVERLAPPING CHANNEL TESTS	746
11.6.4.	MOVE AND CLOSING TIME	746
11.7.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH 750	
11.7.1.	TEST CHANNEL	750

11.7.2.	RADAR WAVEFORM AND TRAFFIC	750
11.7.3.	OVERLAPPING CHANNEL TESTS	753
11.7.4.	MOVE AND CLOSING TIME	753
11.7.5.	30-MINUTE NON-OCCUPANCY PERIOD	757
11.8.	<i>PEER TO PEER MODE EUT RESULTS FOR 20 MHz BANDWIDTH</i>	758
11.8.1.	TEST CHANNEL	758
11.8.2.	RADAR WAVEFORM AND TRAFFIC	758
11.8.3.	OVERLAPPING CHANNEL TESTS	761
11.8.4.	MOVE AND CLOSING TIME	761
11.9.	<i>PEER TO PEER MODE EUT RESULTS FOR 40 MHz BANDWIDTH</i>	765
11.9.1.	TEST CHANNEL	765
11.9.2.	RADAR WAVEFORM AND TRAFFIC	765
11.9.3.	OVERLAPPING CHANNEL TESTS	768
11.9.4.	MOVE AND CLOSING TIME	768
11.10.	<i>PEER TO PEER MODE EUT RESULTS FOR 80 MHz BANDWIDTH</i>	772
11.10.1.	TEST CHANNEL	772
11.10.2.	RADAR WAVEFORM AND TRAFFIC	772
11.10.3.	OVERLAPPING CHANNEL TESTS	775
11.10.4.	MOVE AND CLOSING TIME	775
11.10.5.	30-MINUTE NON-OCCUPANCY PERIOD	779
11.11.	<i>PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 20 MHz BANDWIDTH</i>	780
11.11.1.	TEST CHANNEL	780
11.11.2.	RADAR WAVEFORM AND TRAFFIC	780
11.11.3.	OVERLAPPING CHANNEL TESTS	783
11.11.4.	MOVE AND CLOSING TIME	783
11.12.	<i>PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 40 MHz BANDWIDTH</i>	787
11.12.1.	TEST CHANNEL	787
11.12.2.	RADAR WAVEFORM AND TRAFFIC	787
11.12.3.	OVERLAPPING CHANNEL TESTS	790
11.12.4.	MOVE AND CLOSING TIME	790
11.13.	<i>PEER TO PEER MODE PEER SLAVE DEVICE RESULTS FOR 80 MHz BANDWIDTH</i>	794
11.13.1.	TEST CHANNEL	794
11.13.2.	RADAR WAVEFORM AND TRAFFIC	794
11.13.3.	OVERLAPPING CHANNEL TESTS	797
11.13.4.	MOVE AND CLOSING TIME	797
11.13.5.	30-MINUTE NON-OCCUPANCY PERIOD	801
12.	SETUP PHOTOS	802

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A1902

SERIAL NUMBER: C39TX005J954

DATE TESTED: MAY 11, 2017 – AUGUST 09, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Prepared By:



Chin Pang
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.



Tri Pham
LAB ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

FCC: The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v02/D03 v01r02/D04 v01/D06 v02/ D07v02, FCC KDB 789033 D02 v01r04, FCC KDB 644545 D03 v01, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A (IC:2324B-1)	<input checked="" type="checkbox"/> Chamber D (IC: 22541-1)
<input type="checkbox"/> Chamber B (IC:2324B-2)	<input checked="" type="checkbox"/> Chamber E (IC: 22541-2)
<input type="checkbox"/> Chamber C (IC:2324B-3)	<input checked="" type="checkbox"/> Chamber F (IC: 22541-3)
	<input type="checkbox"/> Chamber G (IC: 22541-4)
	<input checked="" type="checkbox"/> Chamber H (IC: 22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB
Occupied Channel Bandwidth	±0.39 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The equipment under Test is a mobile phone with GSM, GPRS, EGPRS, UMTS, LTE and TD-SCDMA technologies. It also supports IEEE 802.11a/b/g/n/ac, Bluetooth®, GPS and NFC. The device has a built-in inductive charging receiver which is not user accessible. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

NOTE: Covered modes are test reduction modes. The output powers on the “covered modes are equal to or less than the mode referenced and use the same modulation.

5.2GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	20.91	123.31
	802.11n VHT20 1TX	Covered by 802.11n HT20 SISO	
	802.11n HT20 CDD 2TX	20.95	124.45
	802.11n HT20 STBC/SDM 2TX, 802.11ac VHT20 STBC/SDM 2TX	Covered by 802.11n HT20 2TX CDD	
5190 - 5230	802.11n HT40 SISO	19.44	87.90
	802.11n VHT40 1TX	Covered by 802.11n HT20 SISO	
	802.11n HT40 CDD 2TX	22.44	175.39
	802.11n HT40 STBC/SDM 2TX, 802.11ac VHT40 STBC/SDM 2TX	Covered by 802.11n HT40 2TX CDD	
5210	802.11ac VHT80 SISO	17.47	55.85
	802.11ac VHT80 CDD 2TX	19.40	87.10
	802.11ac VHT80 STBC/SDM 2TX	Covered by 802.11ac VHT80 2TX CDD	

5.3GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	20.94	124.17
	802.11n VHT20 1TX	Covered by 802.11n HT20 SISO	
	802.11n HT20 CDD 2TX	20.95	124.45
	802.11n HT20 STBC/SDM 2TX, 802.11ac VHT20 STBC/SDM 2TX	Covered by 802.11n HT20 2TX CDD	
5270 - 5310	802.11n HT40 SISO	19.45	88.10
	802.11n VHT40 1TX	Covered by 802.11n HT40 SISO	
	802.11n HT40 CDD 2TX	22.41	174.18
	802.11n HT40 STBC/SDM 2TX, 802.11ac VHT40 STBC/SDM 2TX	Covered by 802.11n HT40 2TX CDD	
5290	802.11ac VHT80 SISO	17.39	54.83
	802.11ac VHT80 CDD 2TX	19.37	86.50
	802.11ac VHT80 STBC/SDM 2TX	Covered by 802.11ac HT80 2TX CDD	

5.6GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5500 - 5700	802.11a	Covered by 802.11n HT20 SISO	
5500 - 5700	802.11n HT20 SISO	20.93	123.88
	802.11n VHT20 1TX	Covered by 802.11n HT20 SISO	
5720	802.11ac VHT20 SISO (based on UNII-2C band output power)	20.14	103.28
5500 - 5700	802.11n HT20 CDD 2TX	20.91	123.31
	802.11n HT20 STBC/SDM 2TX, 802.11ac VHT20 STBC/SDM 2TX	Covered by 802.11n HT20 CDD 2TX	
5720	802.11ac VHT20 CDD 2TX (based on UNII-2C band output power)	19.93	98.40
	802.11ac VHT20 STBC SISO/2TX (based on UNII-2C band output power)	Covered by 802.11n HT20 2TX CDD	
5510 - 5670	802.11n HT40 SISO	19.48	88.72
	802.11n HT40 1TX	Covered by 802.11n HT40 SISO	
5710	802.11ac VHT40 SISO (based on UNII-2C band output power)	19.03	79.98
5510 - 5670	802.11n HT40 CDD 2TX	22.46	176.20
	802.11n HT40 STBC/SDM 2TX, 802.11ac VHT40 STBC/SDM 2TX	Covered by 802.11n HT40 CDD 2TX	
5710	802.11ac VHT40 CDD 2TX (based on UNII-2C band output power)	22.05	160.32
	802.11ac VHT40 STBC/SDM 2TX	Covered by 802.11ac VHT40 CDD 2TX	
5530-5610	802.11ac VHT80 SISO	19.44	87.90
5690	802.11ac VHT80 SISO (based on UNII-2C band output power)	19.25	84.14
5530-5610	802.11ac VHT80 CDD 2TX	22.43	174.98
	802.11ac VHT80 STBC/SDM 2TX	Covered by 802.11ac VHT80 CDD 2TX	
5690	802.11ac VHT80 CDD 2TX (based on UNII-2C band output power)	22.24	167.49
	802.11ac VHT80 STBC/SDM 2TX	Covered by 802.11ac VHT80 CDD 2TX	

5.8GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	21.48	140.60
	802.11n VHT20 1TX	Covered by 802.11n HT20 SISO	
	802.11n HT20 CDD 2TX	24.44	277.97
	802.11n HT20 STBC/SDM 2TX, 802.11ac VHT20 STBC/SDM 2TX	Covered by 802.11n HT20 CDD 2TX	
5755 - 5795	802.11n HT40 SISO	19.49	88.92
	802.11n VHT40 1TX	Covered by 802.11n HT40 SISO	
	802.11n HT40 CDD 2TX	22.43	174.98
	802.11n HT40 STBC/SDM 2TX, 802.11ac VHT40 STBC/SDM 2TX	Covered by 802.11n HT40 CDD 2TX	
5775	802.11ac VHT80 SISO	19.44	87.90
	802.11ac VHT80 CDD 2TX	22.40	173.78
	802.11ac VHT80 STBC/SDM 2TX	Covered by 802.11ac VHT80 CDD 2TX	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)	
	UAT 2	LAT 3
5.2	-2.73	-7.36
5.3	-2.88	-7.90
5.5	-2.13	-7.97
5.8	-2.71	-7.67

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was version 13.10.452.12

5.5. WORST-CASE CONFIGURATION AND MODE

For radiated harmonics spurious below 1GHz, 1-18GHz L/M/H channels, 18-40GHz, and power line conducted emissions were performed with the EUT set at the CDD mode among the CDD/STBC/SDM modes with power setting equal or higher than SISO modes as worst-case scenario.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 30MHz, below 1GHz, above 18GHz and power line conducted emissions were performed with the EUT was set to transmits at the channel with the highest output power as worst-case scenario.

For SISO modes, there are two transmission antennas. The antenna used in any given time can be either UAT 2 or LAT 3. Both antenna ports have the same power; output power and PSD measurement for SISO modes on both antennas are reported. For MIMO modes, both UAT 2 and LAT 3 used at the same time.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape), Z (Portrait), on both UAT 2 and LAT 3 antennas. In addition, the EUT was also investigated with and without AC/DC charger, headphones & laptop. It was determined that (see table below) was worst-case orientation for both antennas without AC/DC charger, headphones, or laptop; therefore, all final radiated testing was performed with EUT only in (see table below) orientation for 1 - 18GHz and 18 – 40GHz. And for 30-1000MHz EUT was tested with AC/DC charger.

All radiated harmonic 1-18GHz emissions on SISO mode, straddle channels are covered by 2TX MIMO mode with power setting equal or higher than SISO among the CDD/STBC/SDM modes.

Frequency Band (GHz)	Mode	Antenna Port	Worst-case Orientation
5.2-5.8	1TX SISO	UAT 2	Y-Landscape
		LAT 3	X-Flatbed
	2TX MIMO	UAT 2 + LAT 3	Y-Landscape

Worst-case data rates as provided by the client were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT20 mode: MCS0
802.11ac VHT40 mode: MCS0
802.11ac VHT80 mode: MCS0

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For transmission of multiple channels from the same antenna LAT 3 in the 2.4GHz BT/BLE and 5GHz bands, tests were conducted for various configurations having the highest power. No noticeable new emission was found.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop AC/DC adapter	Apple	A1344	T1580	NA
Laptop	Apple	A1278	C02HJ0A7DTY4	NA
DC power supply	Lambda	GEN 60-25	SCPV56329	NA

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Shielded	1	N/A
2	USB	1	USB	Shielded	1	Laptop to EUT
3	AC	1	AC	Un-shielded	3	N/A
4	Aligator clip	1	minigrabber	Un-Shielded	1	DC power supply to EUT

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
NA						

I/O CABLES (AC POWER CONDUCTED TEST AND BELOW 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A


I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGUARTION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A
2	USB	1	USB	Shielded	1	N/A

TEST SETUP

The EUT was tested connected to a host Laptop via USB cable adapter and SMA cable connected to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

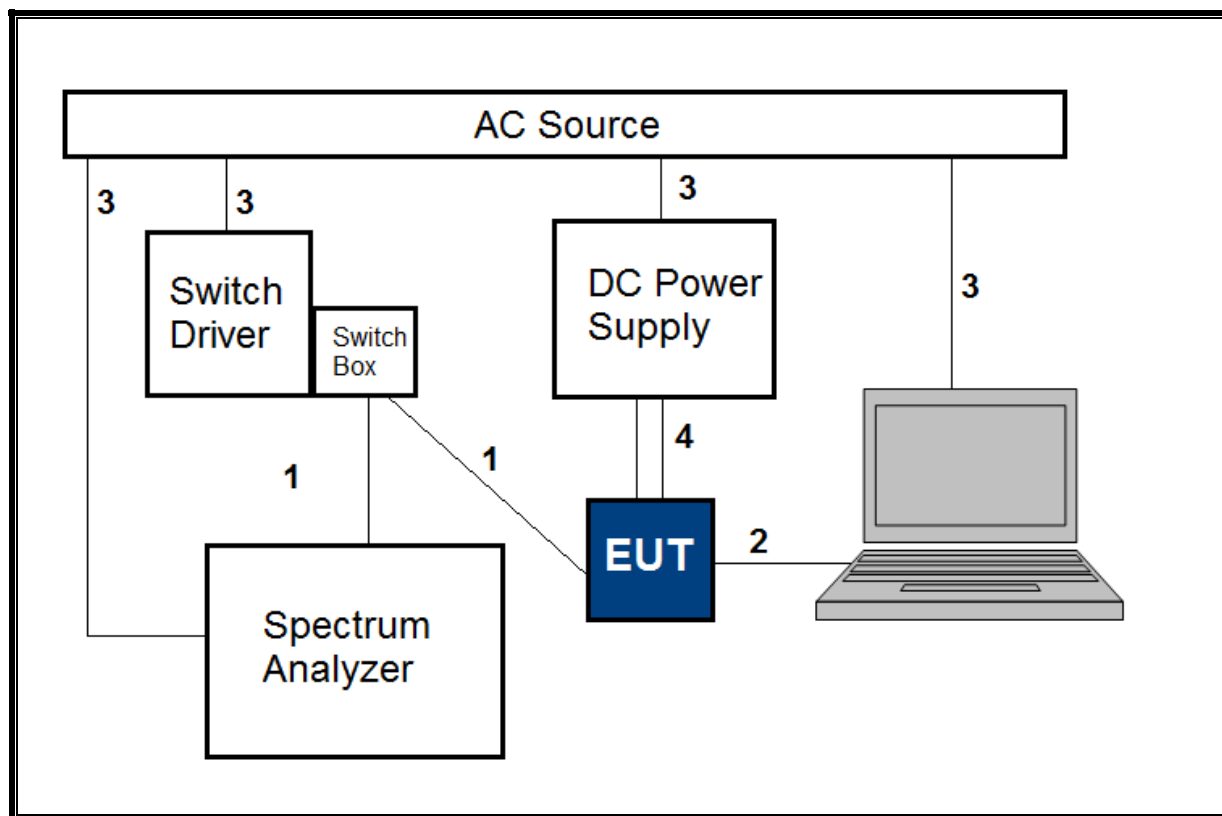

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was powered by battery. Test software exercised the EUT.


SETUP DIAGRAM

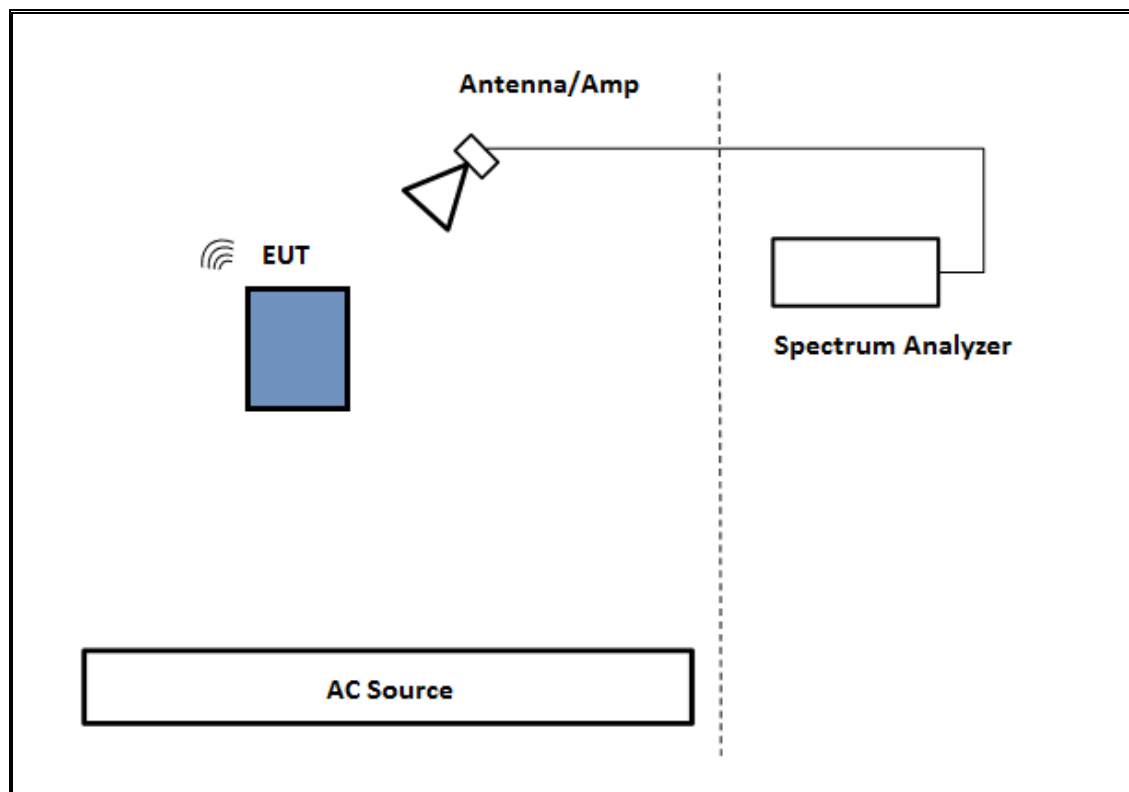

TEST SETUP- BELOW 1GHZ & AC LINE CONDUCTED TESTS

The EUT was powered by AC/DC adapter. Test software exercised the EUT.


SETUP DIAGRAM

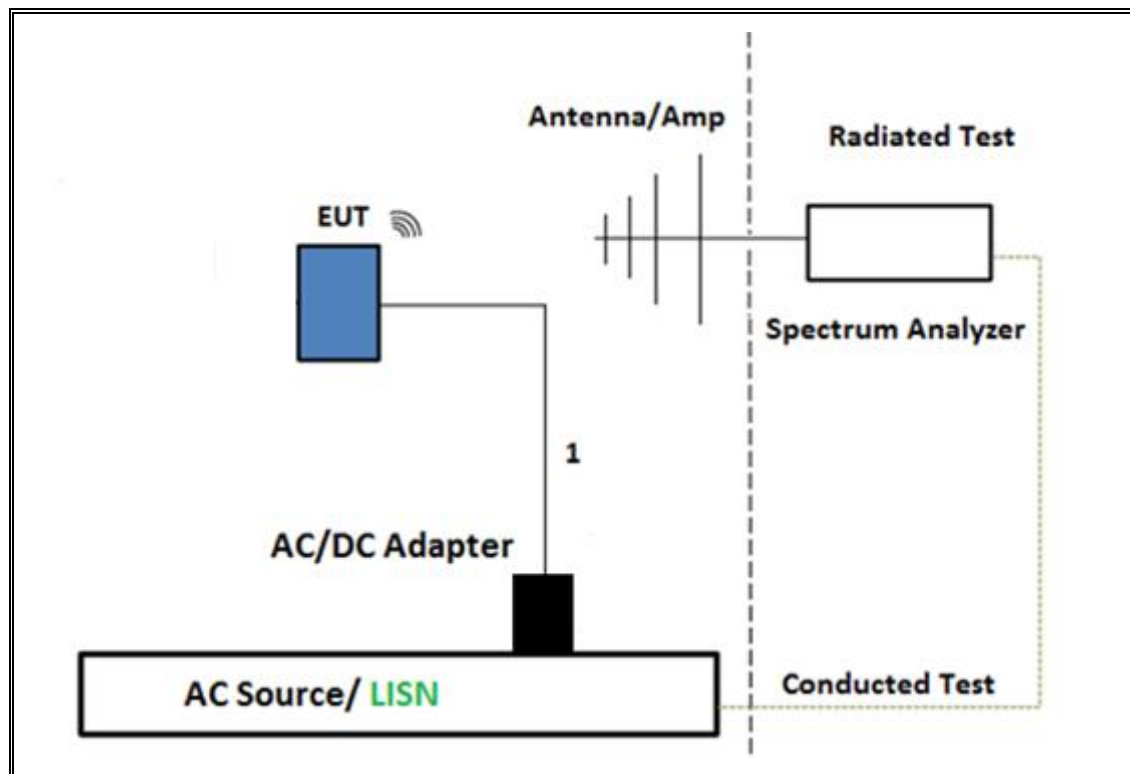

TEST SETUP- AC LINE CONDUCTED TEST (LAPTOP CONFIGURATION)

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.

SETUP DIAGRAM

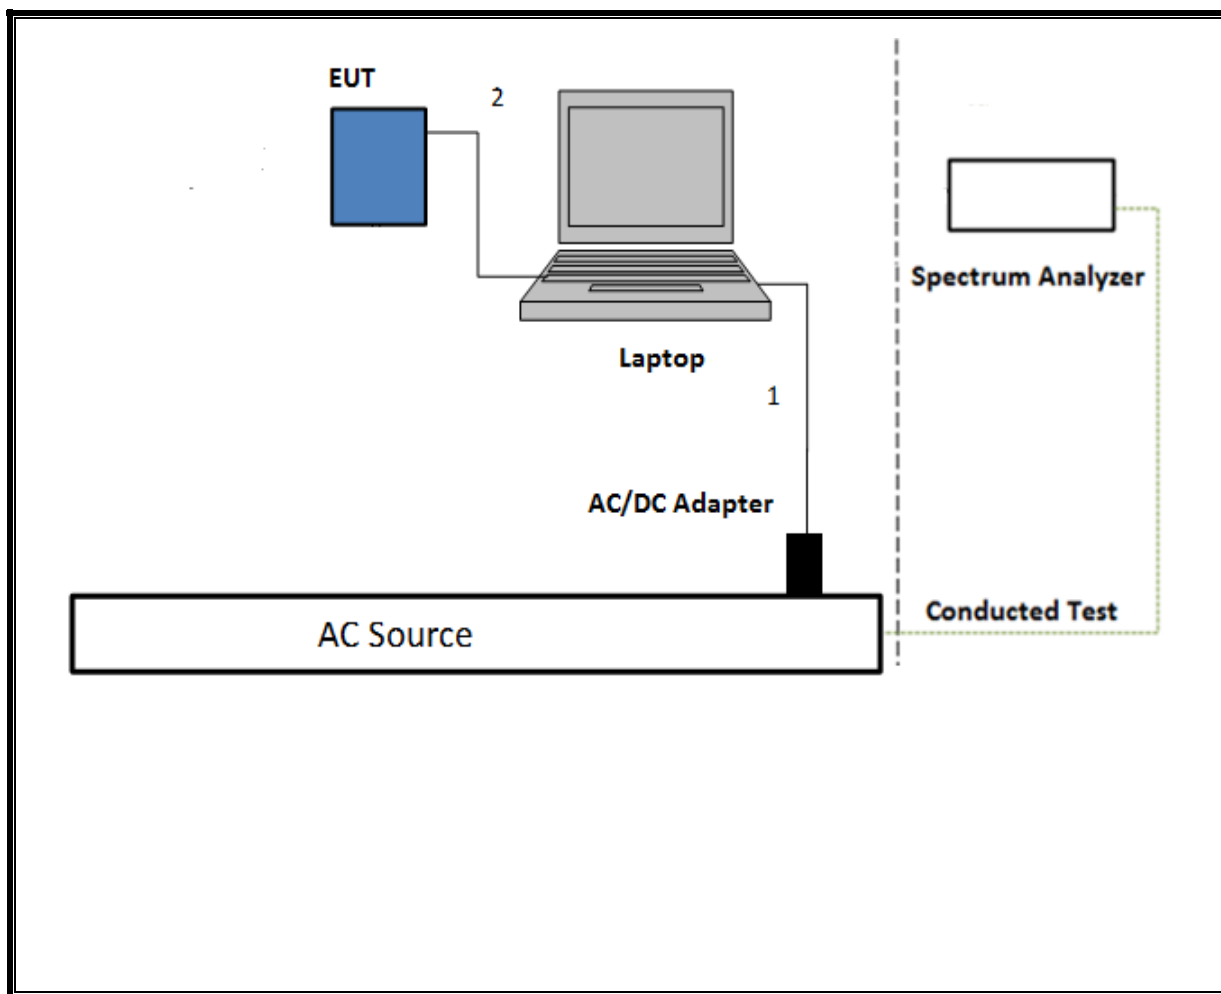

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T300	11/10/17
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T243	10/11/2017
Spectrum Analyzer, PSA, 3Hz to 44GHz	Agilent (Keysight) Technologies	E4446A	T177	03/20/2018
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T345	4/14/2018
*Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T491	5/31/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A-544	T341	10/25/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T122	1/31/2018
*Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T173	6/17/2017
Power Meter, P-series single channel	Agilent (Keysight) Technologies	N1911A	T1245	01/05/2018
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T340	12/14/2017
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T740	11/29/17
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T862	4/20/2018
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T119	3/28/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T742	11/29/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1113	12/20/2017
Power Sensor	Keysight	N1921A	T750	10/1/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T339	09/22/2017
*Antenna Horn, 18 to 26GHz	ARA	MWH-1826	T447	6/16/2017
Antenna Horn 26-40GHz	ARA	MWH-2640	T90	8/19/2017
*Amplifier, 26.5GHz to 40GHz	Miteq	NSP 4000 SP2	T88	4/07/2017
Spectrum Analyzer, 40GHz	Agilent	8564E	T106	9/7/2017
Amplifier, 1 to 26.5GHz 23.5dB gain Minimum	Keysight	8449B	T402	7/5/2017
AC Line Conducted				
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	T1436	01/06/2018
*LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/08/2017
Power Cable, Line Conducted Emissions	UL	PG1	T861	9/1/2017
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

NOTE: *testing is completed before equipment calibration expiration date.

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

7.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.



PROCEDURE



KDB 789033 Zero-Span Spectrum Analyzer Method.



RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (khz)
11n HT20 1TX	1.920	1.941	0.989	98.92%	0.00	0.010
11n HT20 CDD 2TX	1.920	1.941	0.989	98.92%	0.00	0.010
11n HT40 1TX	0.944	0.965	0.978	97.82%	0.10	1.059
11n HT40 CDD 2TX	0.944	0.966	0.977	97.72%	0.10	1.059
11ac VHT80 1TX	0.459	0.481	0.956	95.63%	0.19	2.174
11ac VHT80 CDD 2TX	0.460	0.481	0.956	95.63%	0.19	2.174

DUTY CYCLE PLOTS

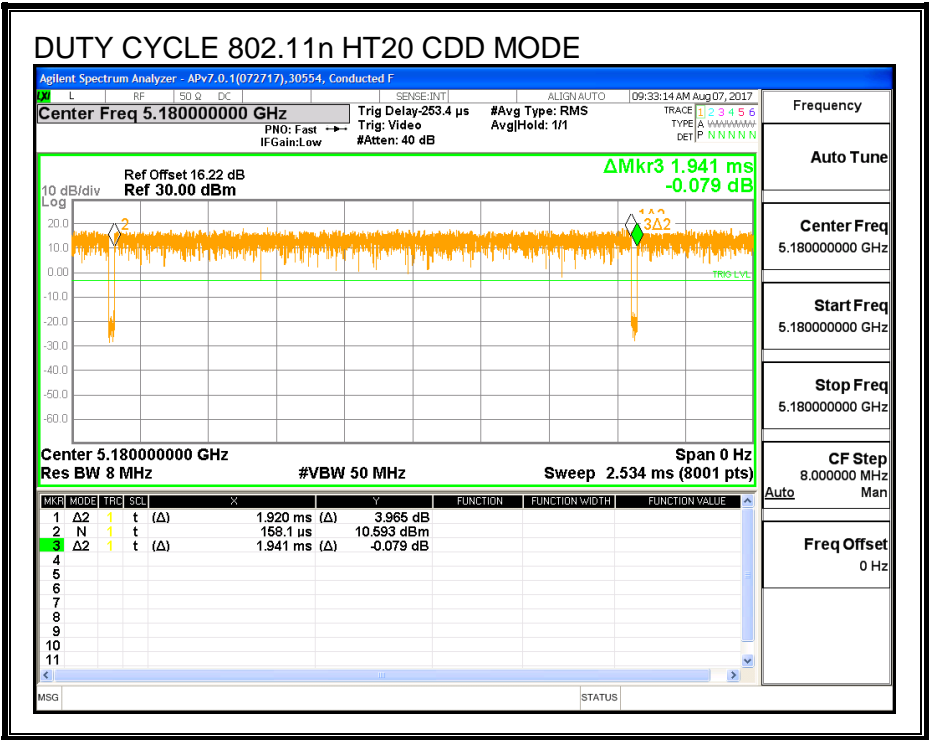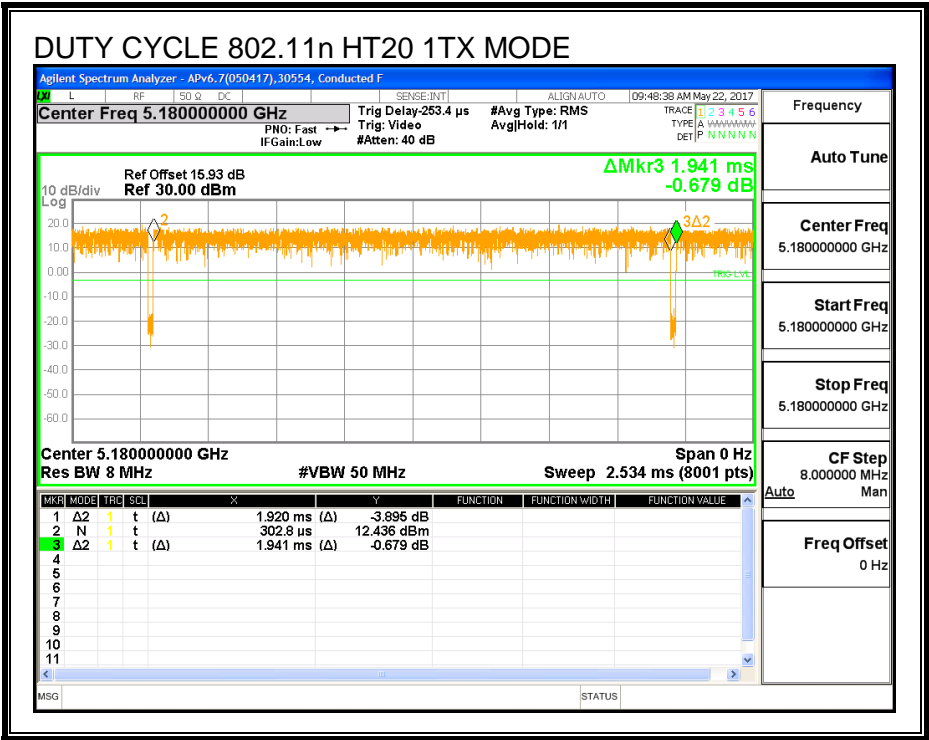

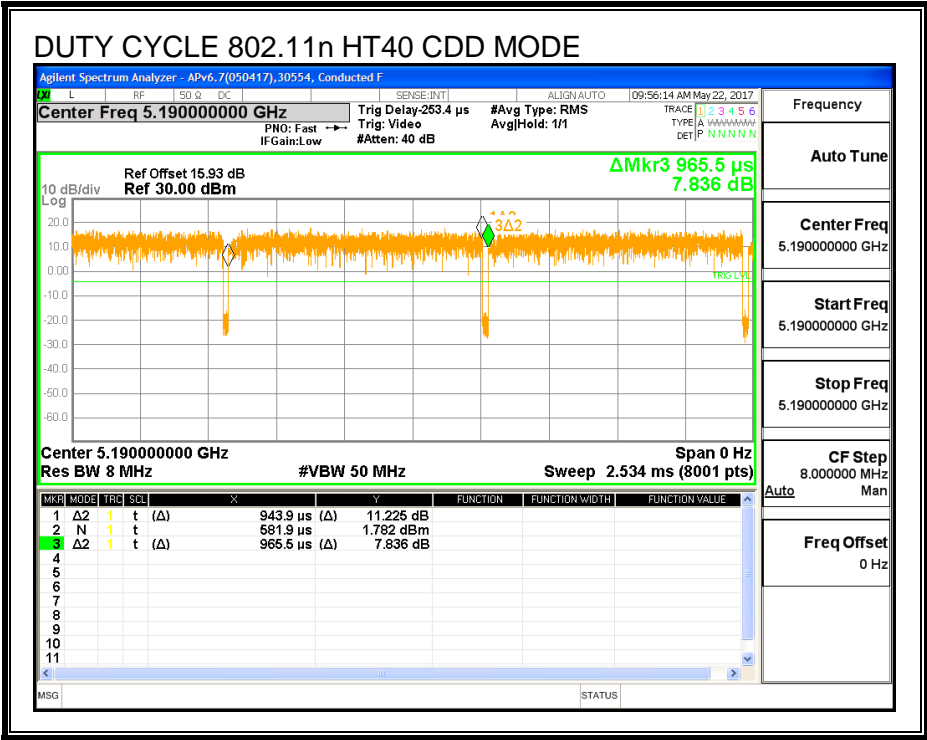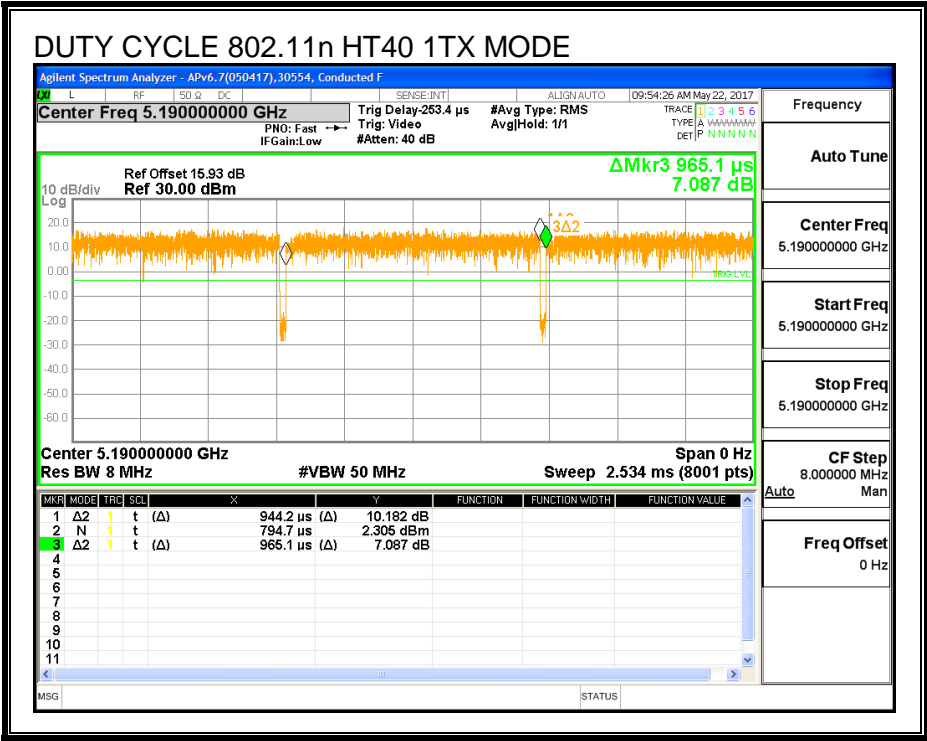

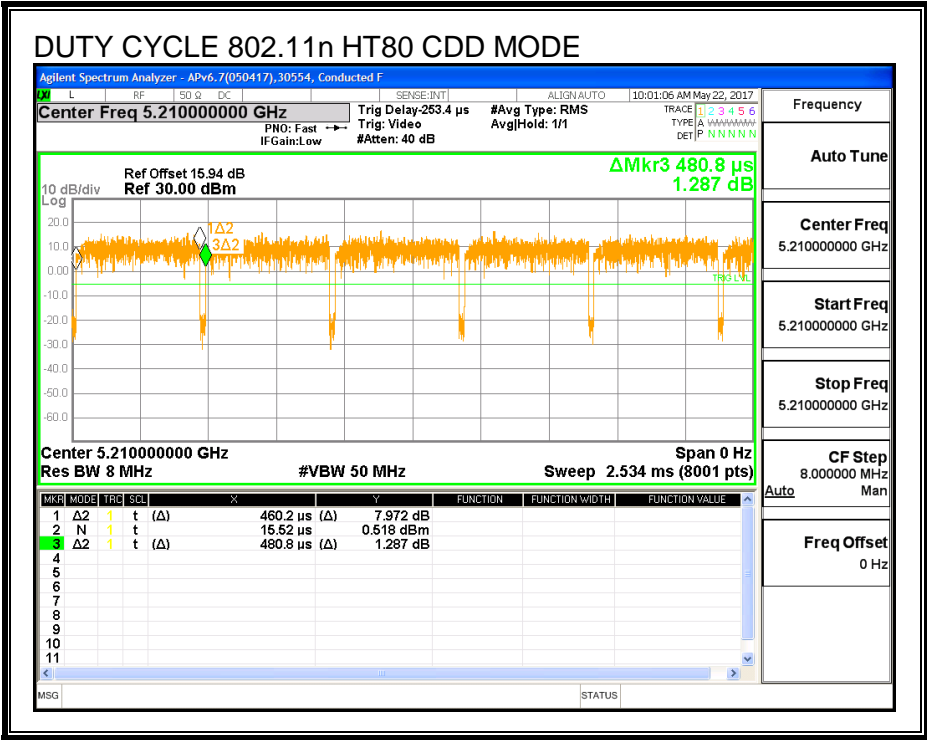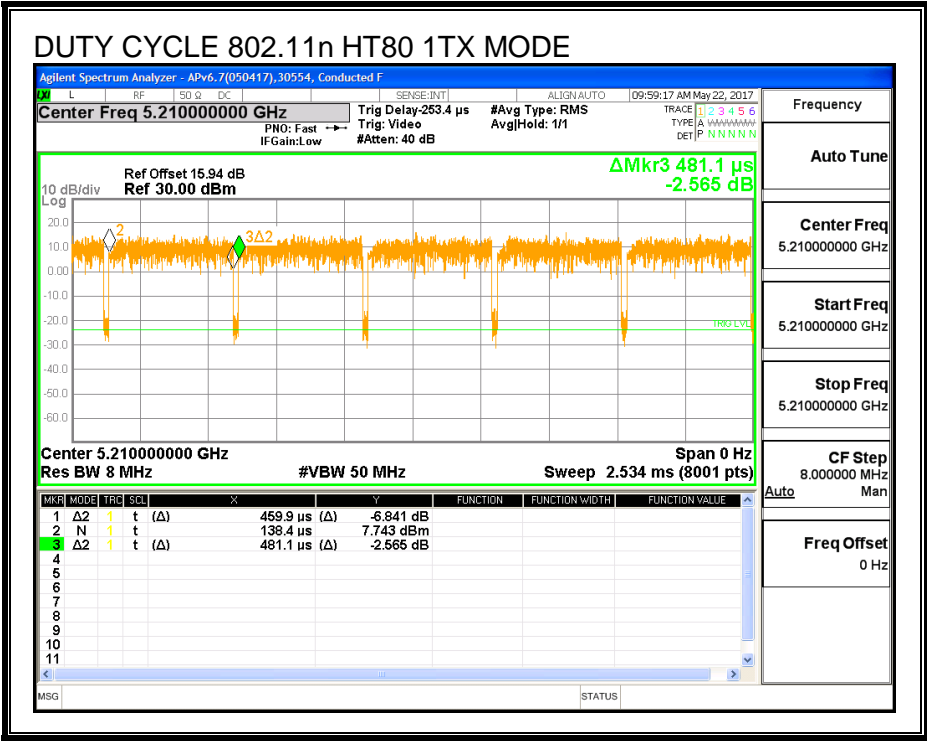

7.2. MEASUREMENT METHODS

6 dB Emission BW: KDB 789033 D02 v01r04, Section C.

26 dB Emission BW: KDB 789033 D02 v01r04, Section C.

99% Occupied BW: KDB 789033 D02 v01r04, Section D.

Conducted Output Power: KDB 789033 D02 v01r04, Section E.3.b (Method PM-G).

Power Spectral Density: KDB 789033 D02 v01r04, Section F (Method SA-2).

Unwanted emissions in restricted bands: KDB 789033 D02 v01r04, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01r04, Sections G.3, G.4, and G.5.

Conducted line emissions: C63.10, Clause 6.2

8. ANTENNA PORT TEST RESULTS

8.1. 11n HT20 UAT 2 SISO MODE IN THE 5.2GHz BAND



8.1.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)
Low	5180	21.95
Mid	5200	22.00
High	5240	21.90

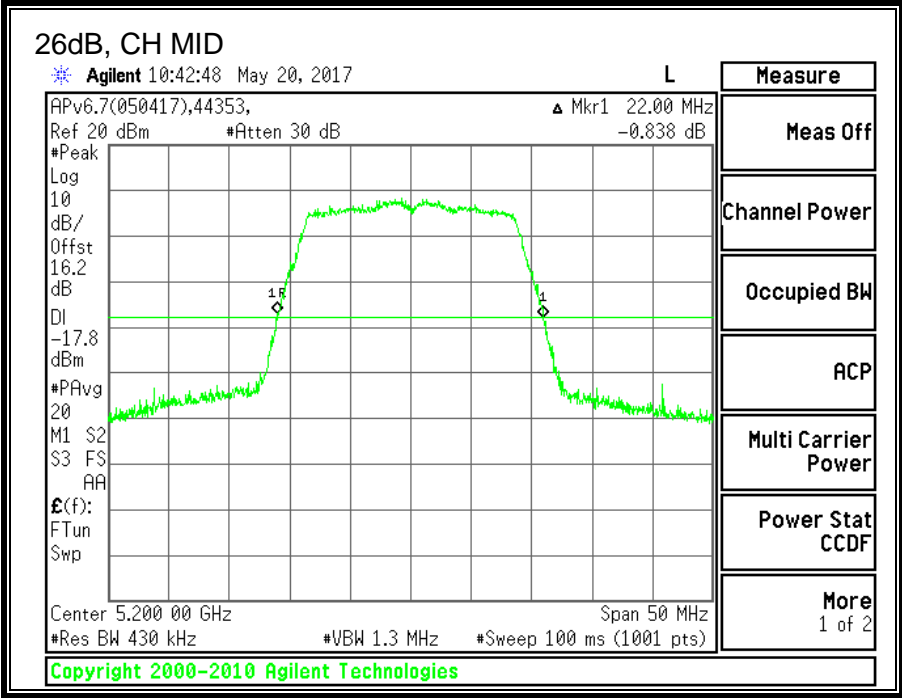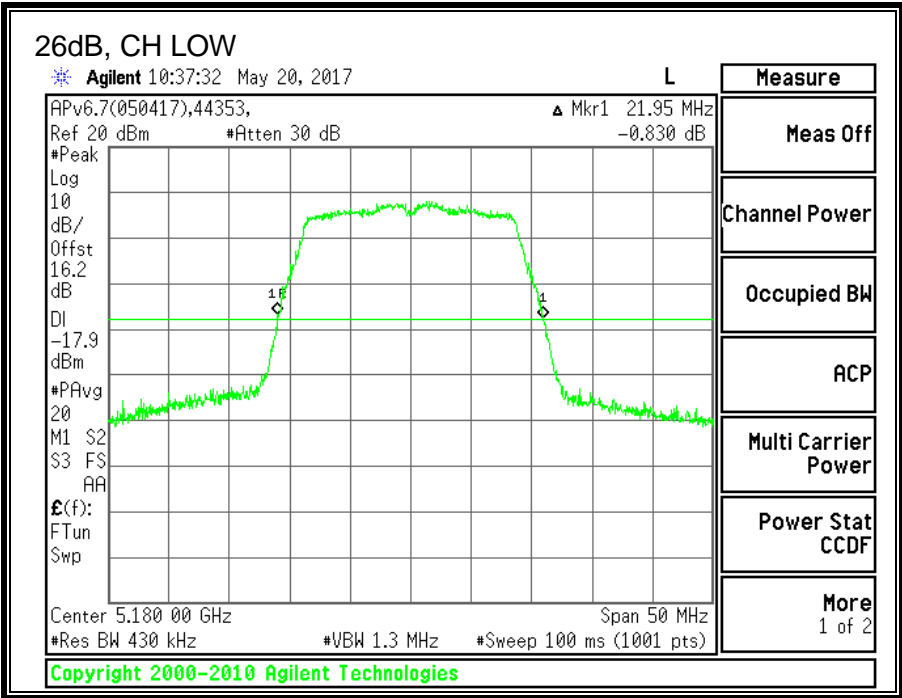

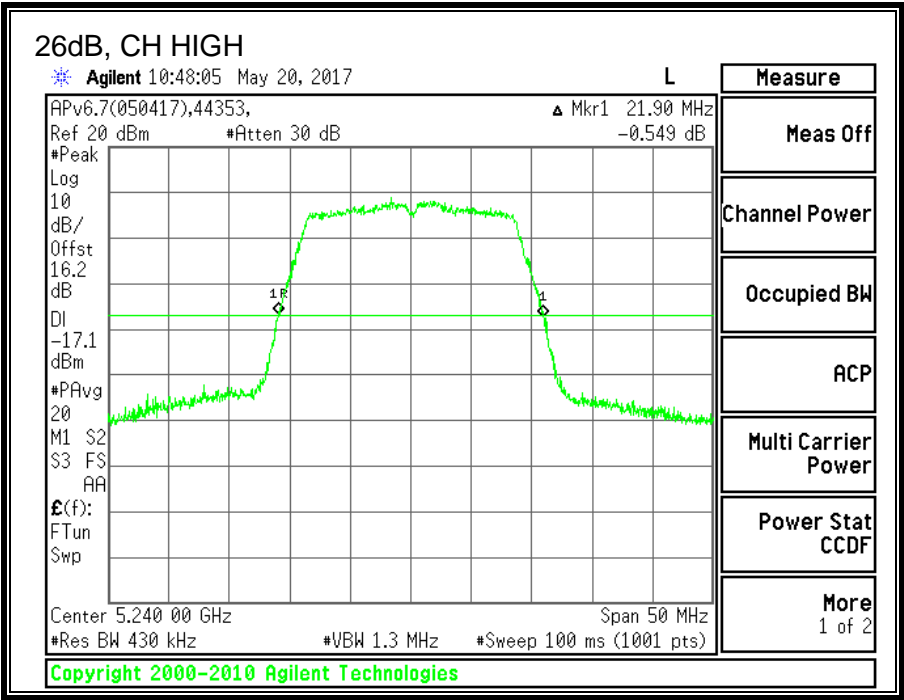



8.1.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)
Low	5180	17.7460
Mid	5200	17.6778
High	5240	17.6717

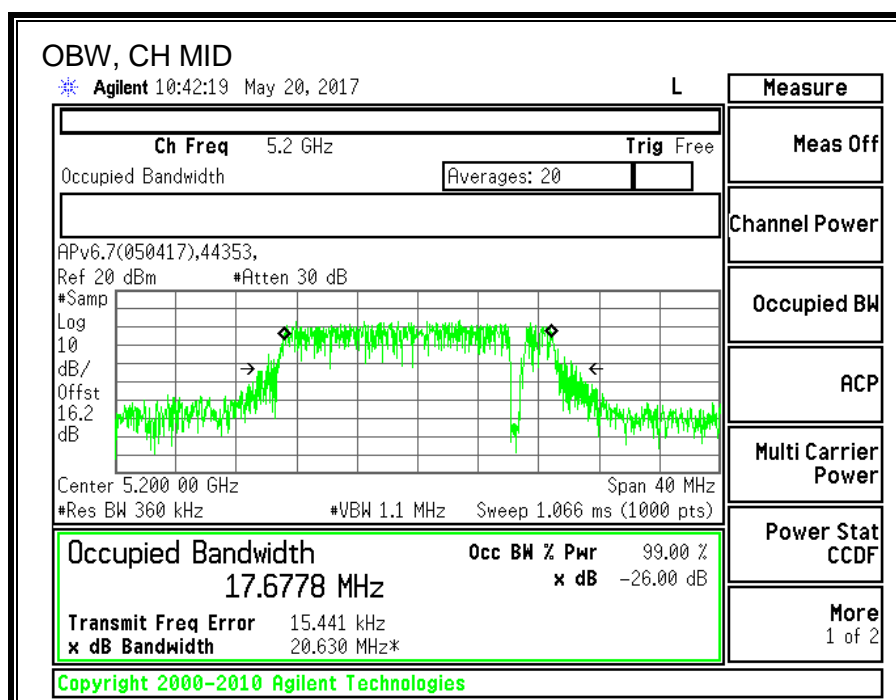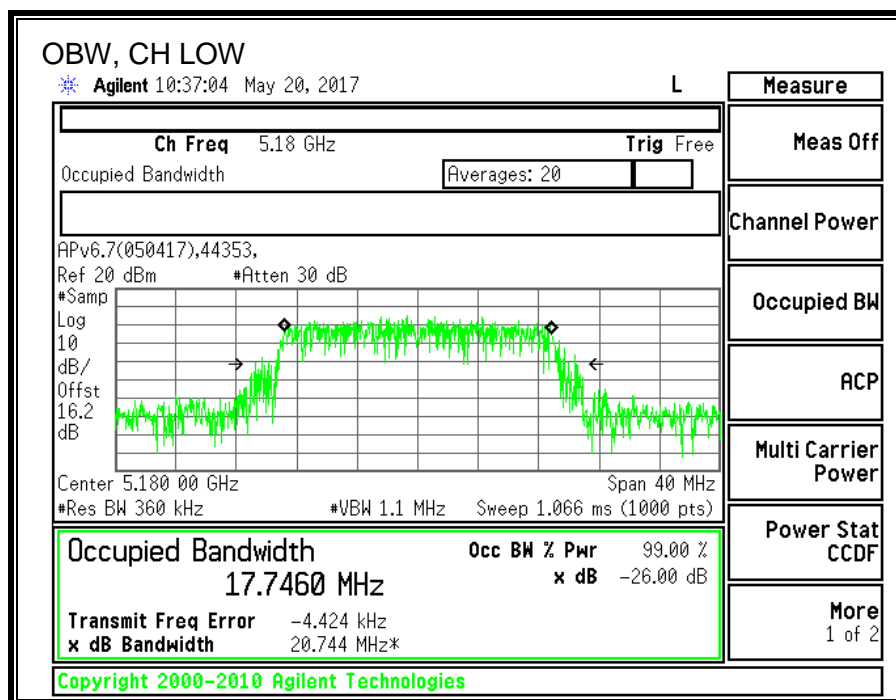

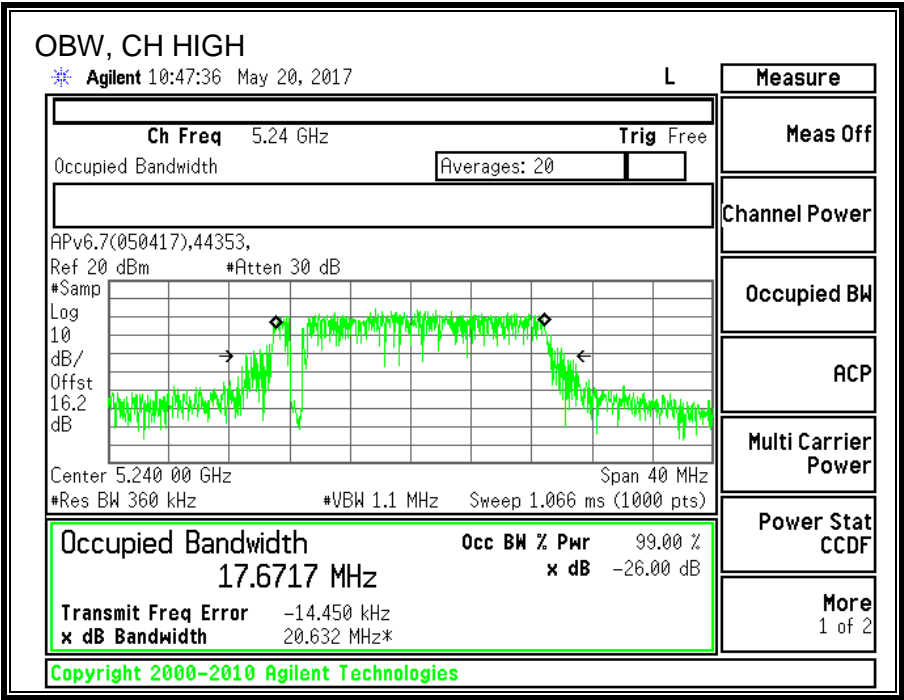

8.1.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power UAT 2 (dBm)
Low	5180	18.87
Mid	5200	20.90
High	5240	20.83

8.1.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-2.73	-2.73	24.00	11.00
Mid	5200	-2.73	-2.73	24.00	11.00
High	5240	-2.73	-2.73	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	18.87	18.87	24.00	-5.13
Mid	5200	20.90	20.90	24.00	-3.10
High	5240	20.83	20.83	24.00	-3.17

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	9.887	9.887	11.00	-1.11
Mid	5200	9.918	9.918	11.00	-1.08
High	5240	10.325	10.325	11.00	-0.68

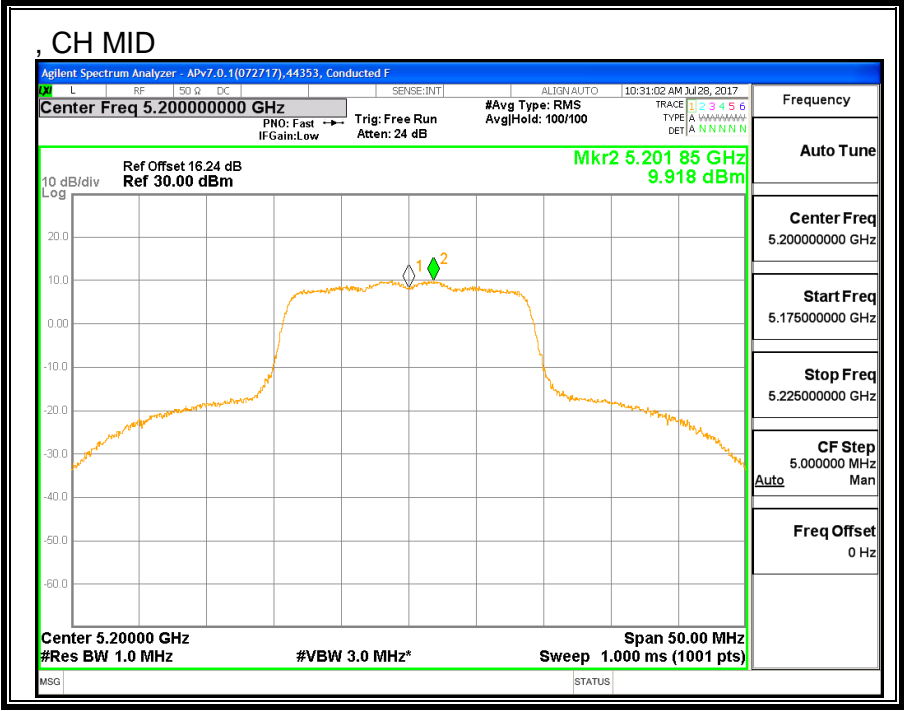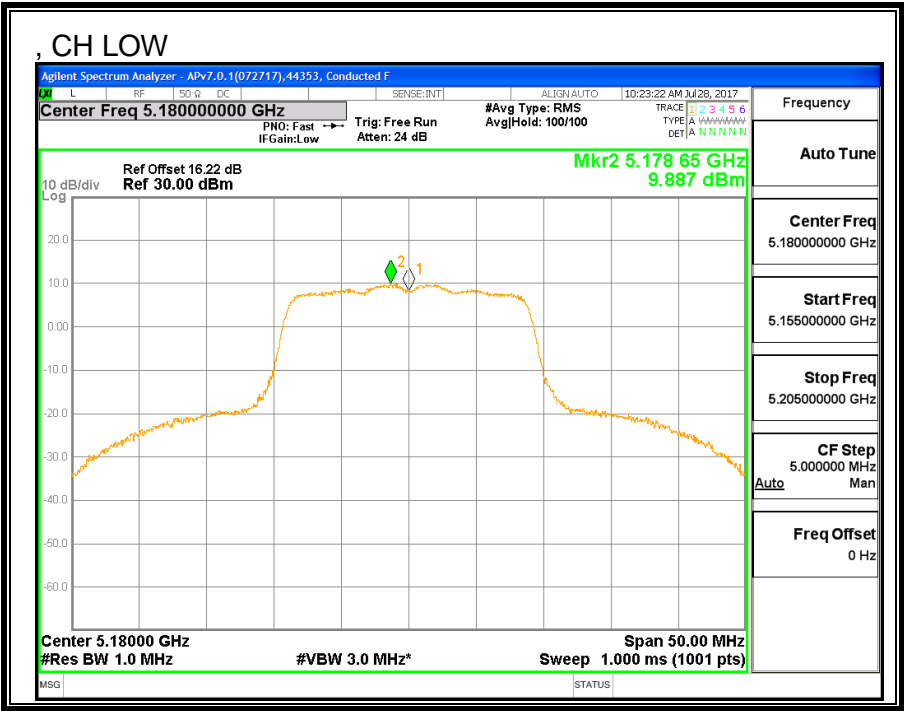

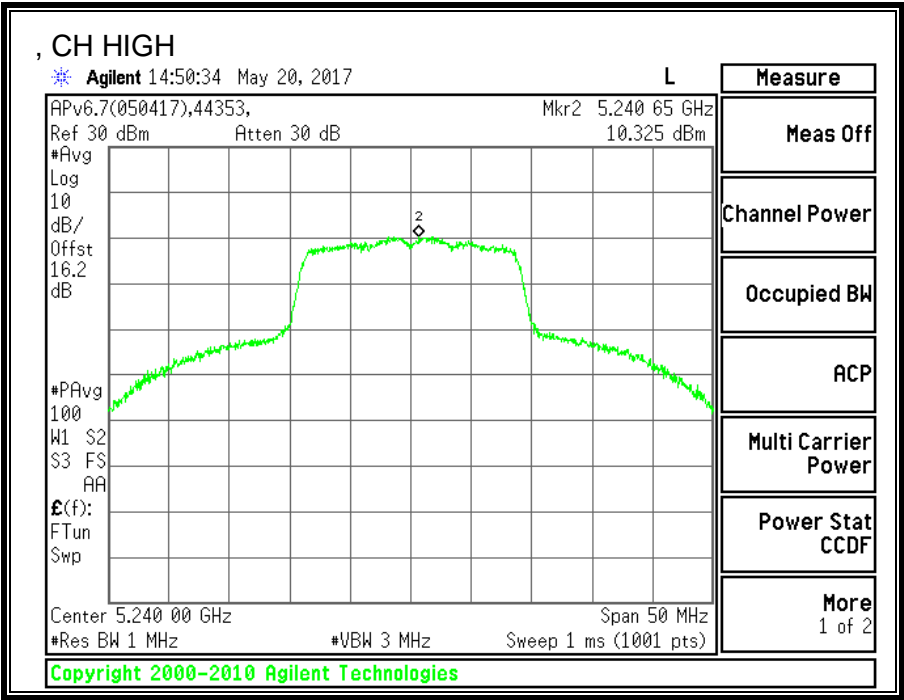

8.2. 11n HT20 LAT 3 SISO MODE IN THE 5.2GHz BAND



8.2.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Low	5180	22.15
Mid	5200	21.95
High	5240	21.90

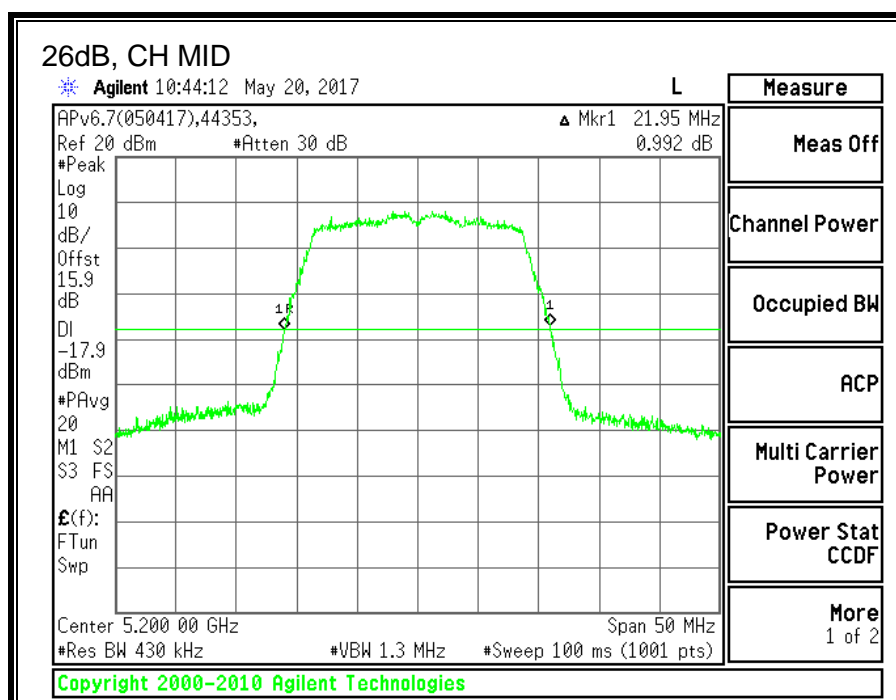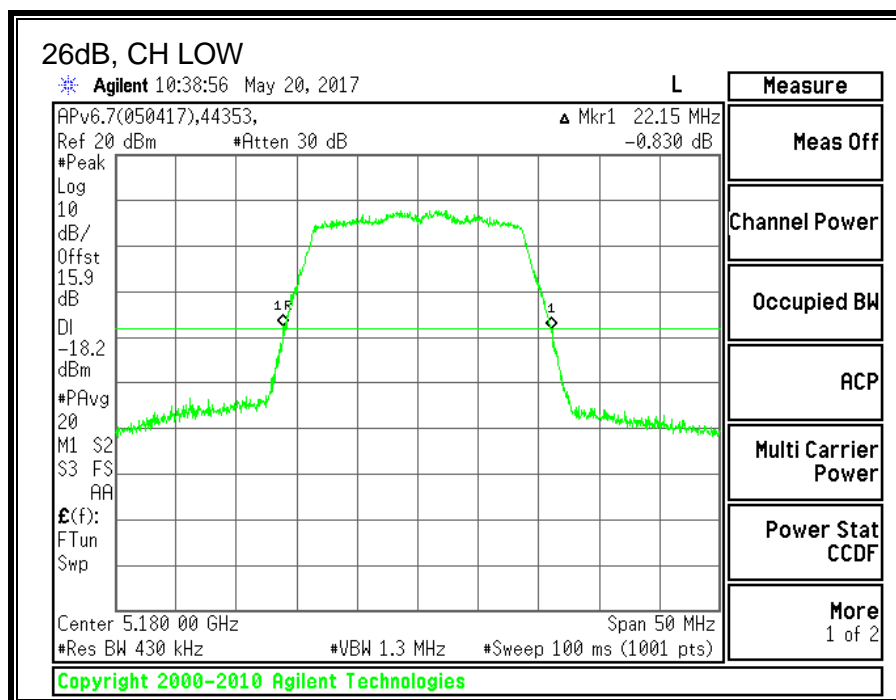

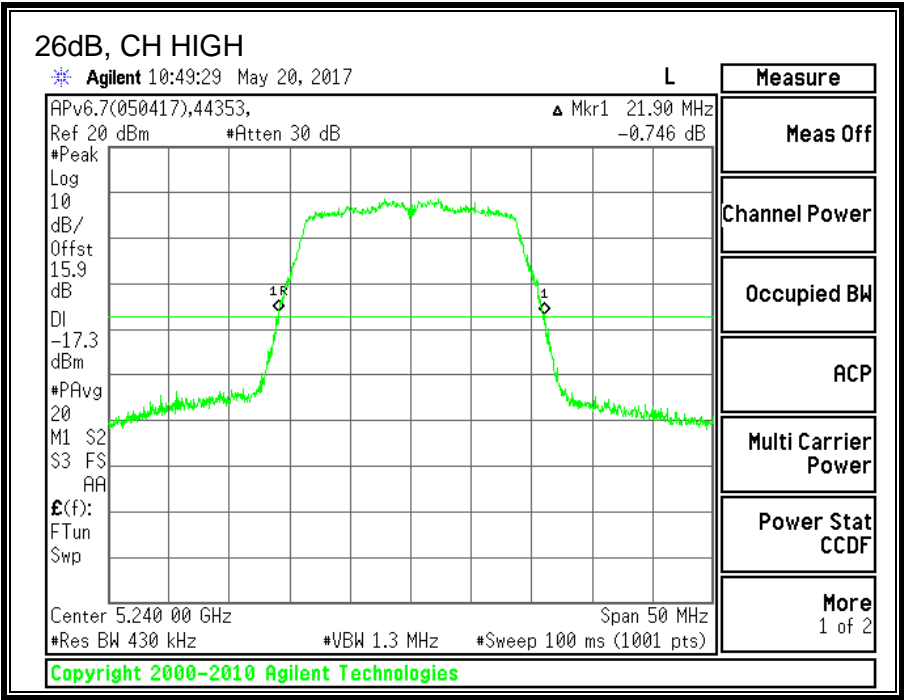



8.2.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW LAT 3 (MHz)
Low	5180	17.7252
Mid	5200	17.6709
High	5240	17.6925

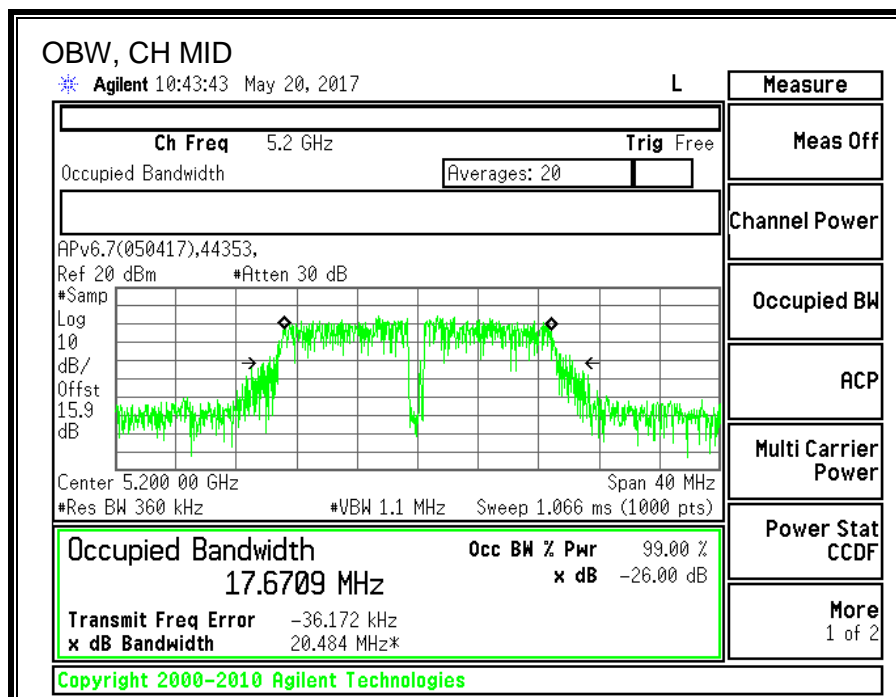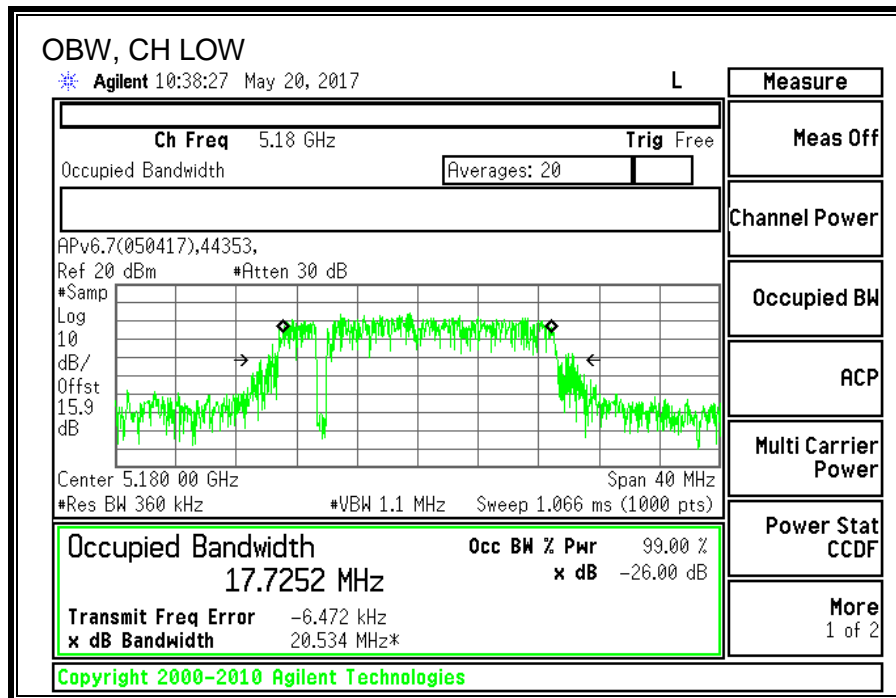

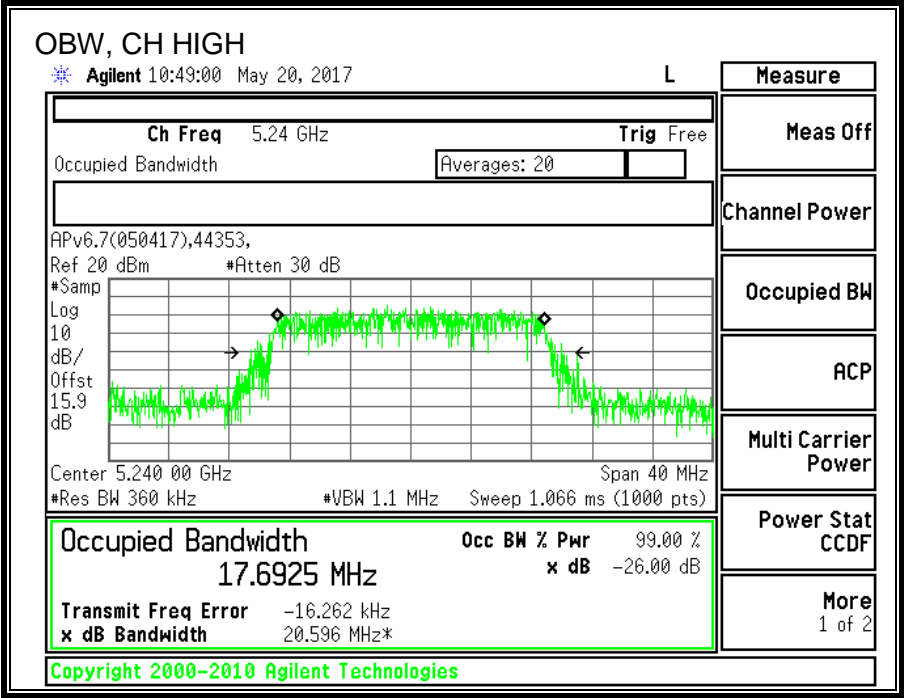

8.2.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power LAT 3 (dBm)
Low	5180	18.93
Mid	5200	20.86
High	5240	20.91

8.2.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-7.36	-7.36	24.00	11.00
Mid	5200	-7.36	-7.36	24.00	11.00
High	5240	-7.36	-7.36	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	18.93	18.93	24.00	-5.07
Mid	5200	20.86	20.86	24.00	-3.14
High	5240	20.91	20.91	24.00	-3.09

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	10.480	10.480	11.00	-0.52
Mid	5200	10.483	10.483	11.00	-0.52
High	5240	10.641	10.641	11.00	-0.36

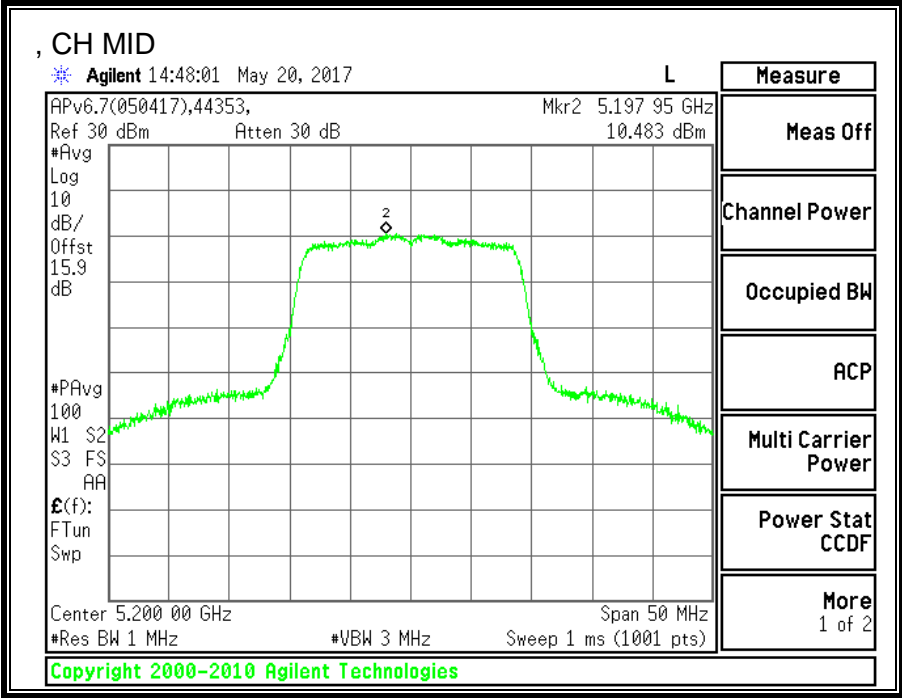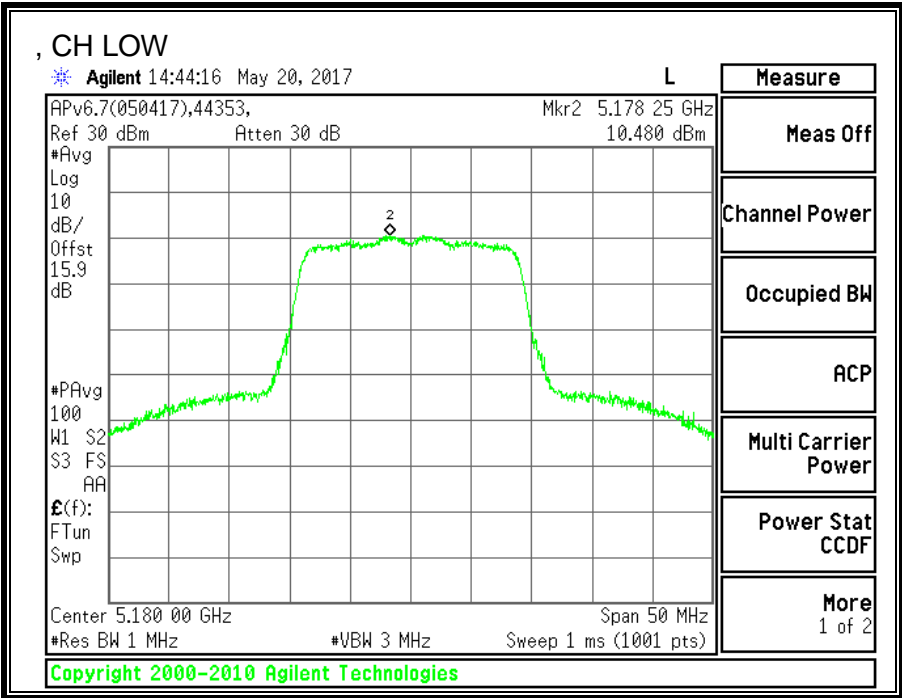

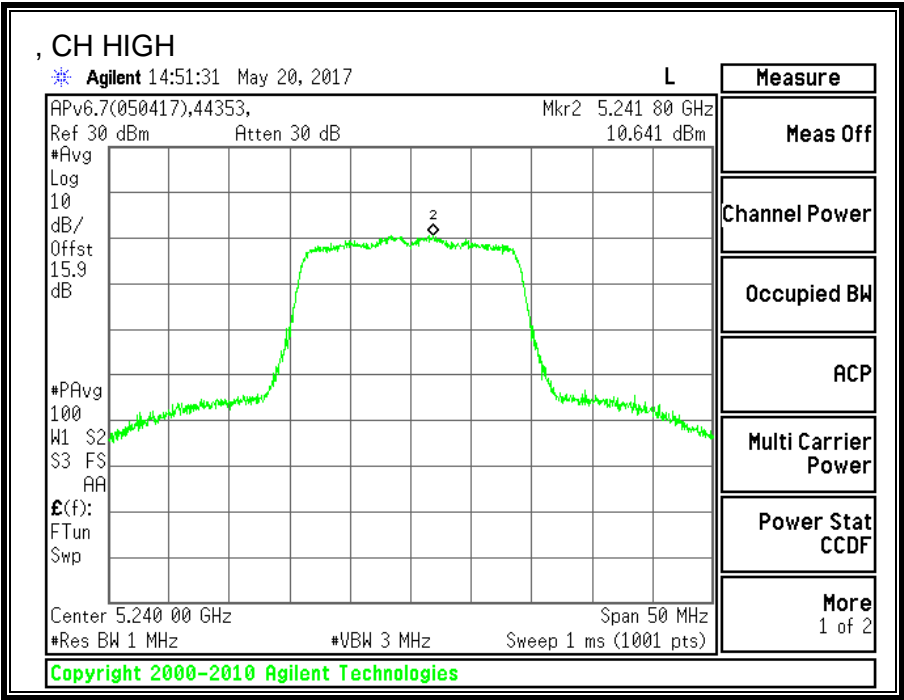

8.3. 11n HT20 2TX CDD MIMO MODE IN THE 5.2GHz BAND



8.3.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)	26 dB BW LAT 3 (MHz)
Low	5180	22.05	21.70
Mid	5200	22.10	21.70
High	5240	22.15	21.60

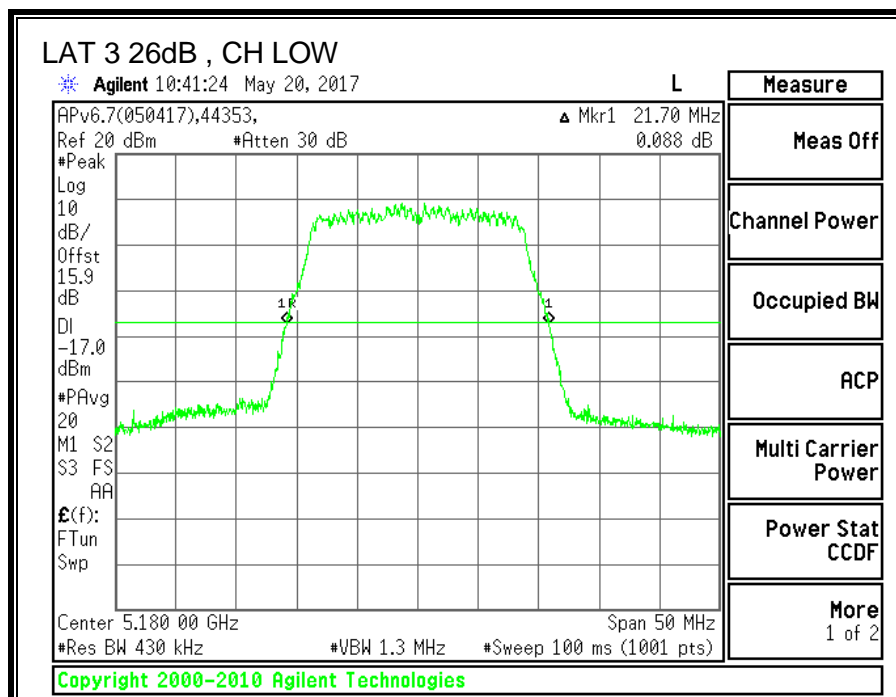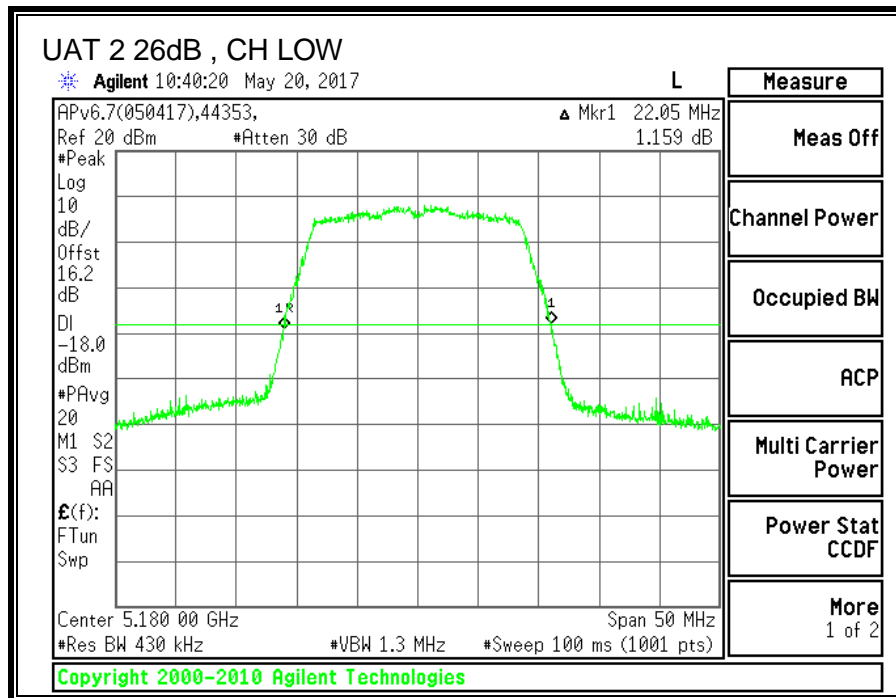

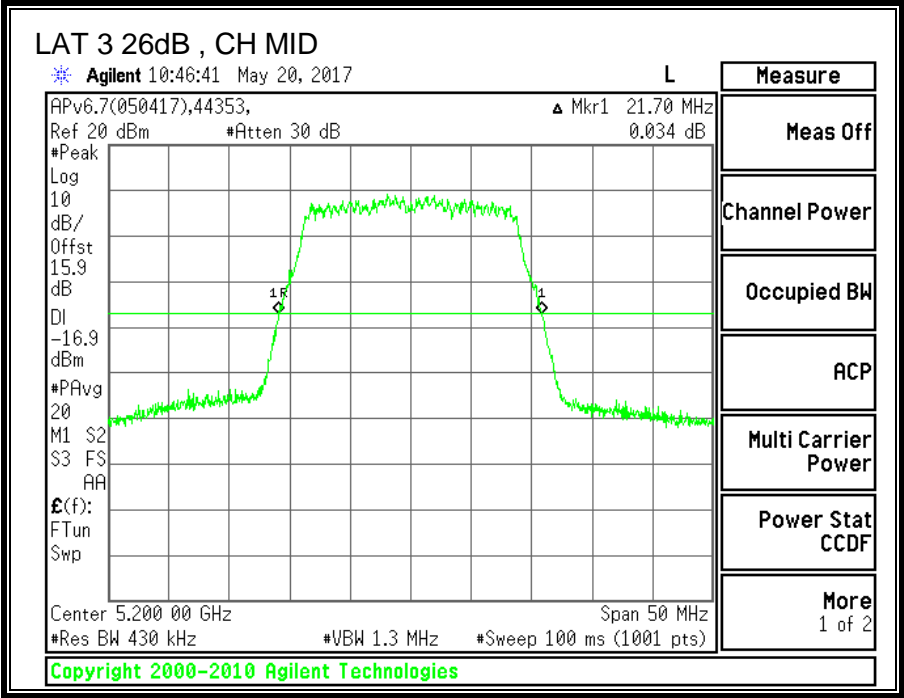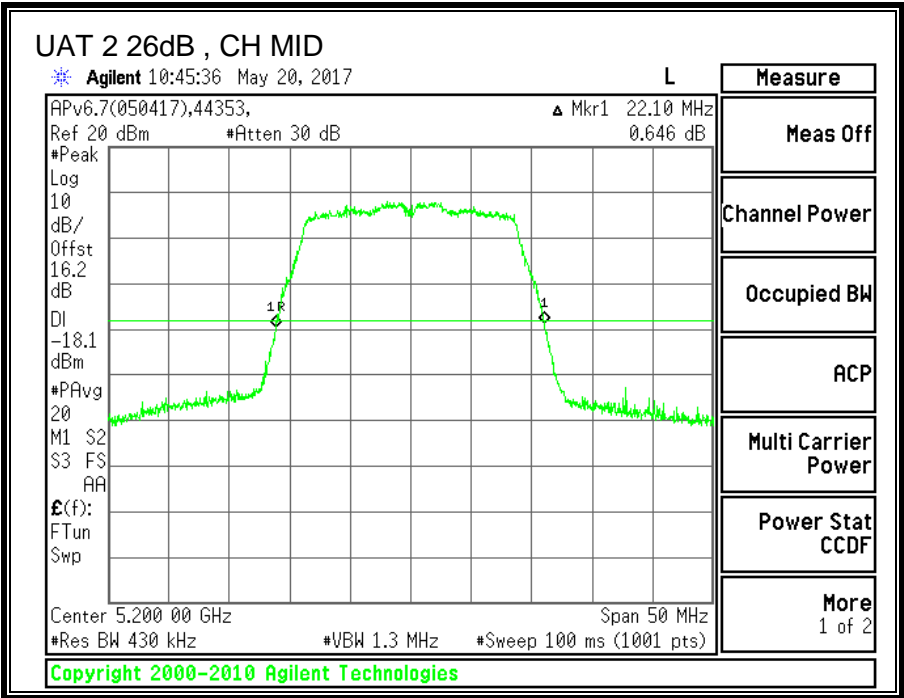

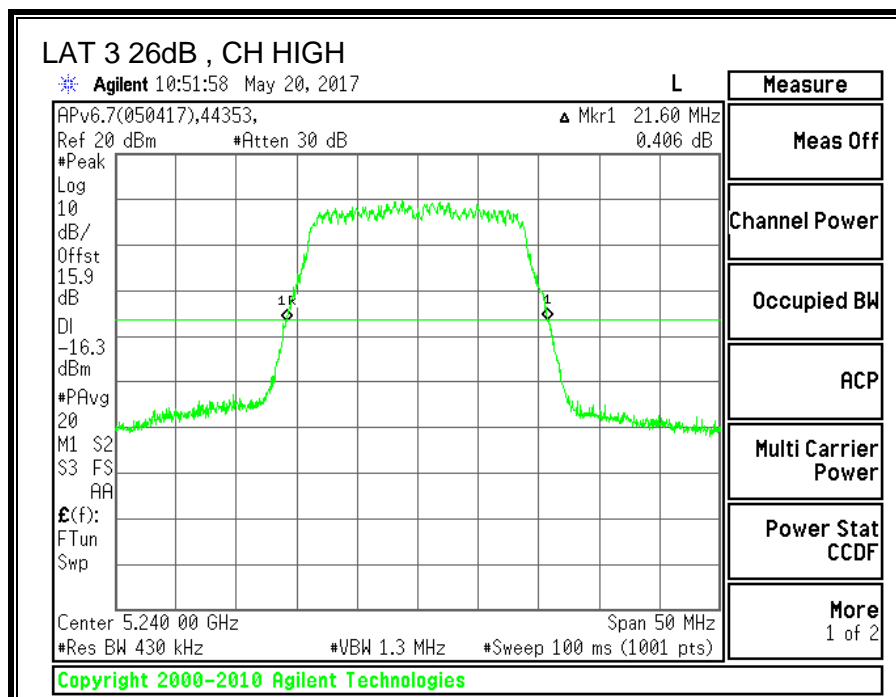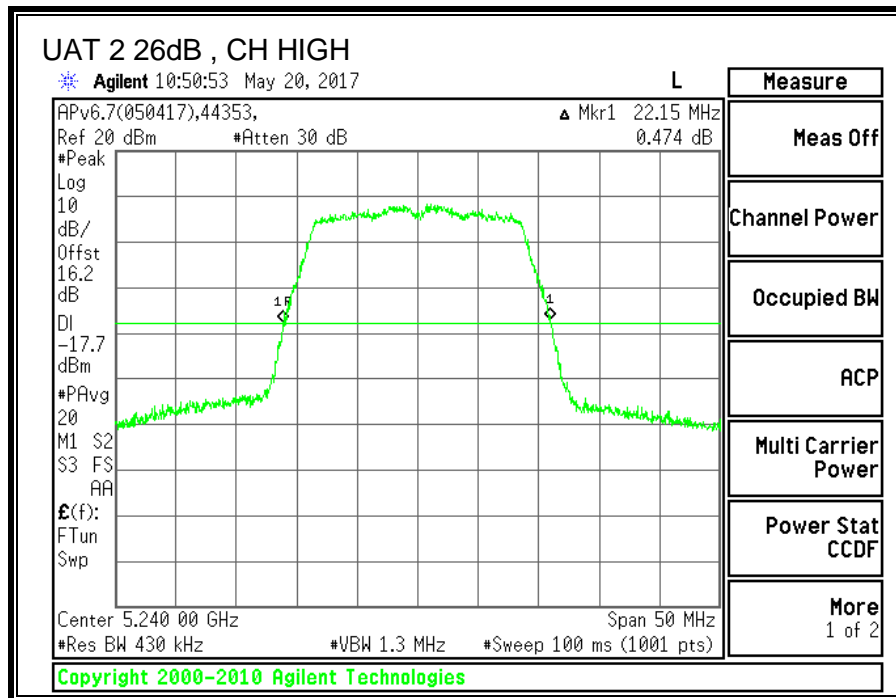



8.3.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)	99% BW LAT 3 (MHz)
Low	5180	17.6962	17.7169
Mid	5200	17.6835	17.6958
High	5240	17.6602	17.6716

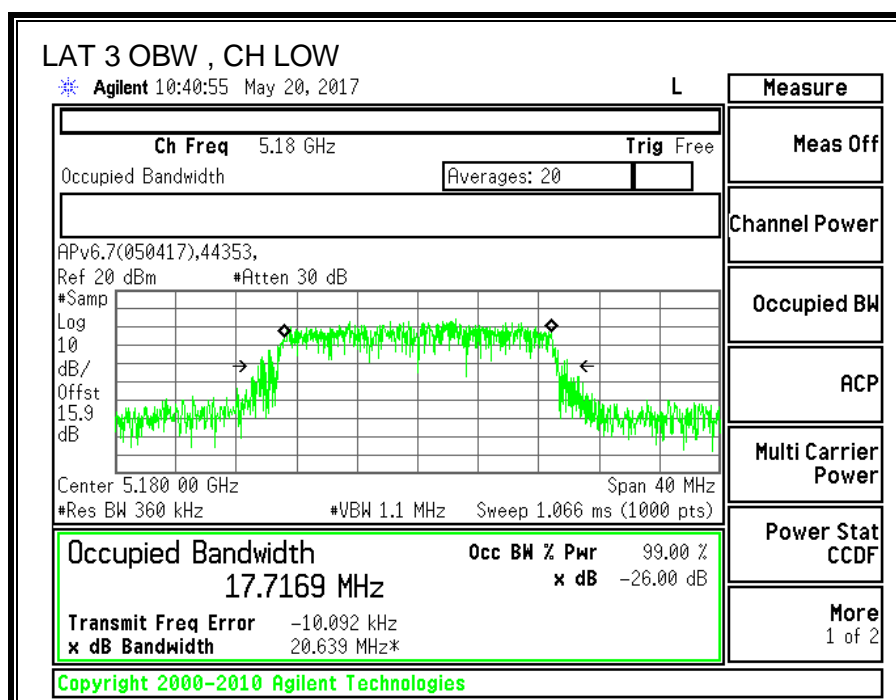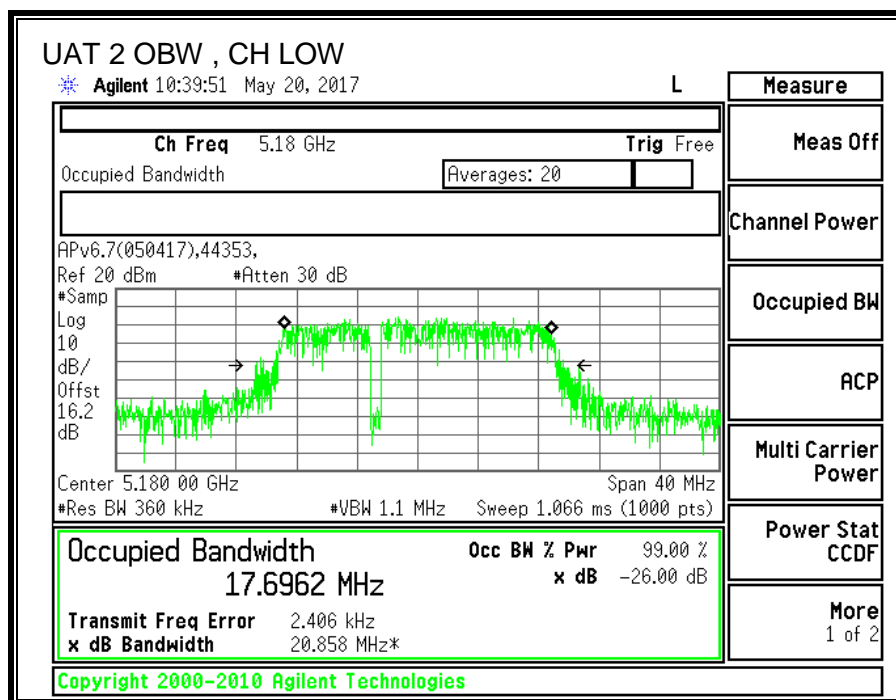

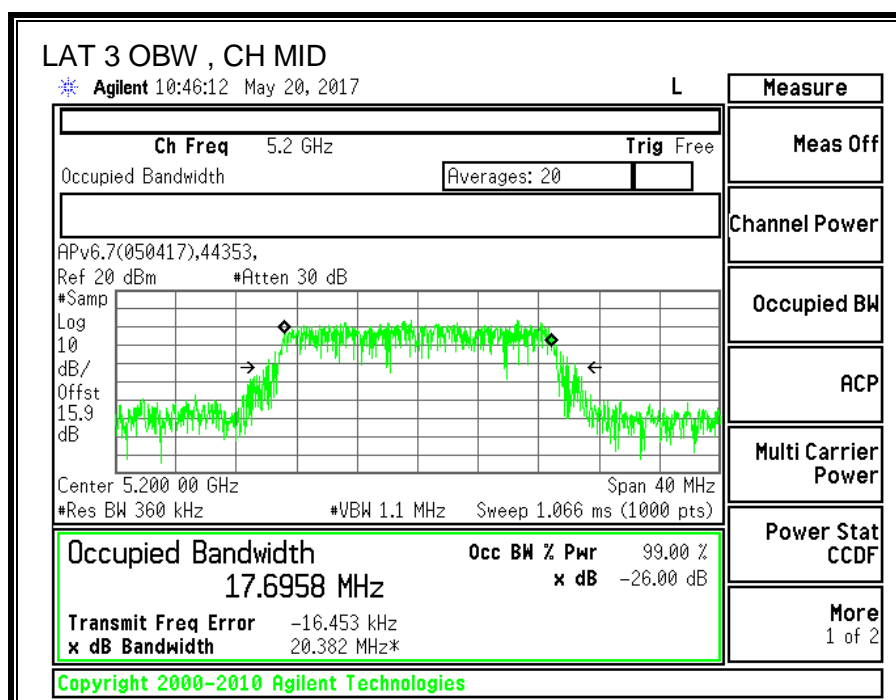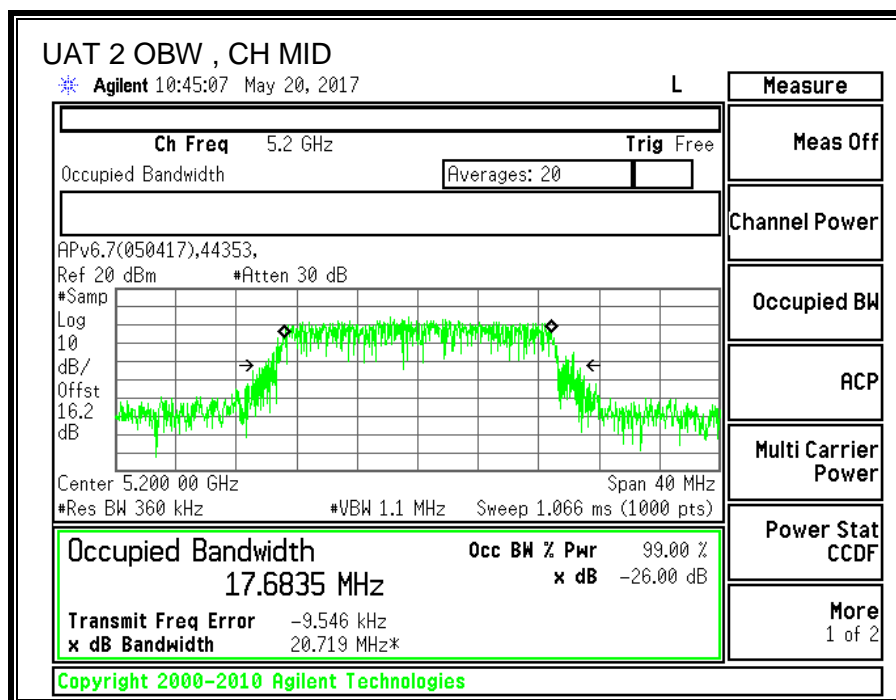

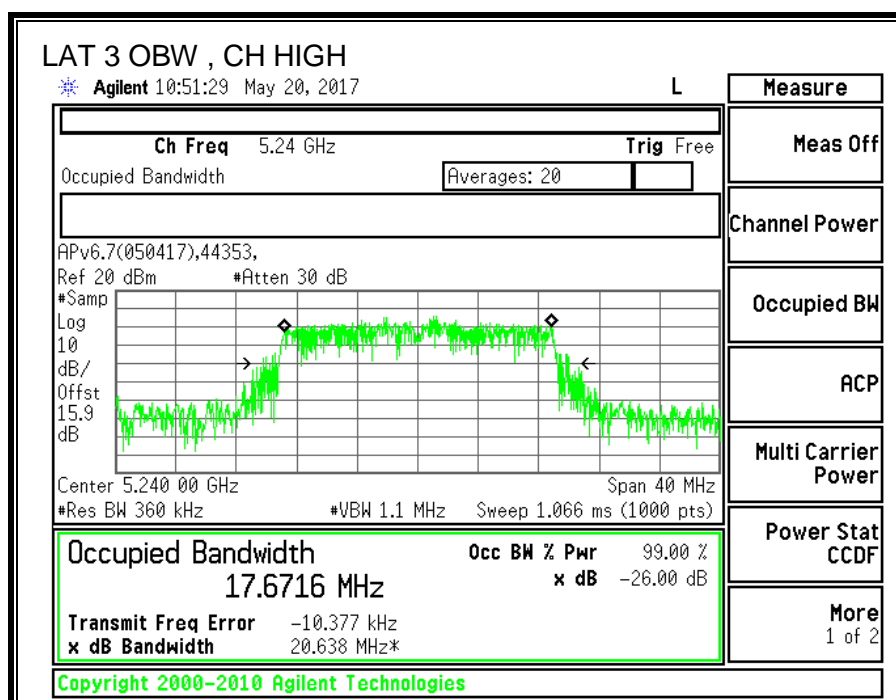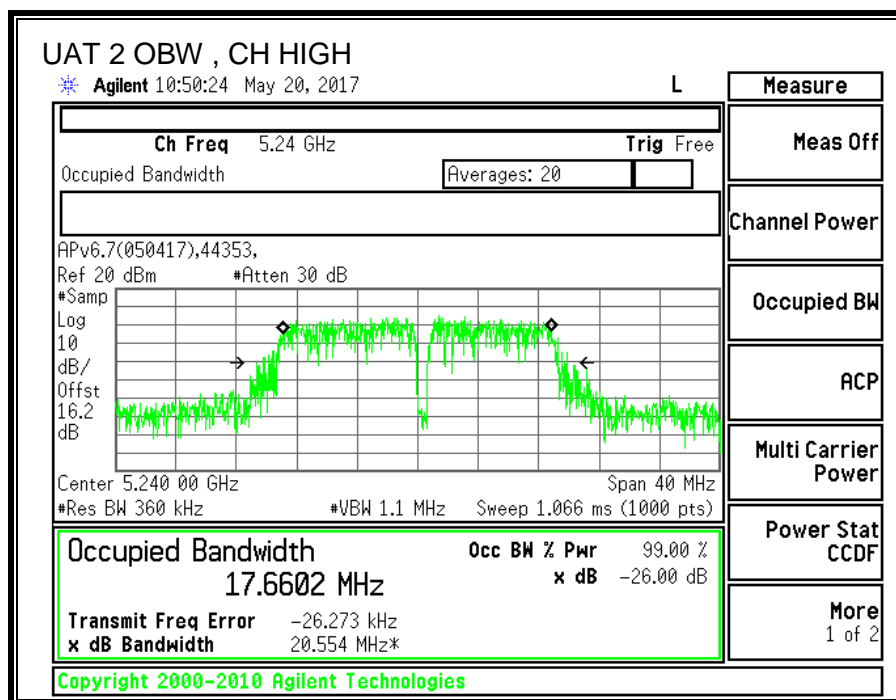

8.3.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Average Power Results

Channel	Frequency (MHz)	UAT 2 Power (dBm)	LAT 3 Power (dBm)	Total Power (dBm)
Low	5180	17.90	17.82	20.87
Mid	5200	17.93	17.94	20.95
High	5240	17.89	17.81	20.86

8.3.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

For Power used uncorrelated gain: The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-2.73	-7.36	-4.46

For PSD used correlated gain: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-2.73	-7.36	-1.73

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-4.46	-1.73	24.00	11.00
Mid	5200	-4.46	-1.73	24.00	11.00
High	5240	-4.46	-1.73	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results



Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	17.90	17.82	20.87	24.00	-3.13
Mid	5200	17.93	17.94	20.95	24.00	-3.05
High	5240	17.89	17.81	20.86	24.00	-3.14

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	7.914	7.256	10.61	11.00	-0.39
Mid	5200	7.625	7.210	10.43	11.00	-0.57
High	5240	7.783	7.388	10.60	11.00	-0.40

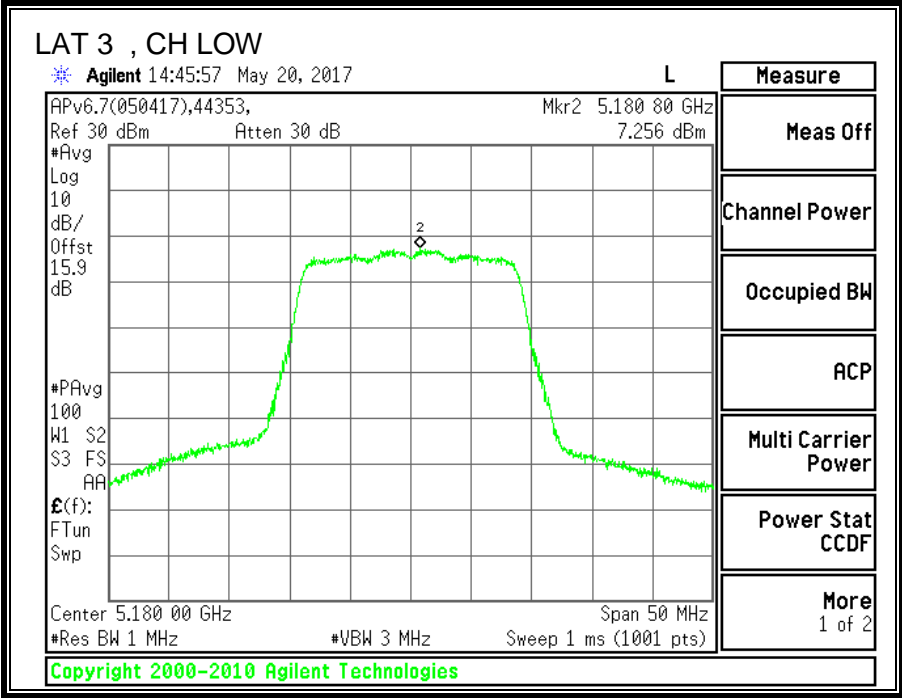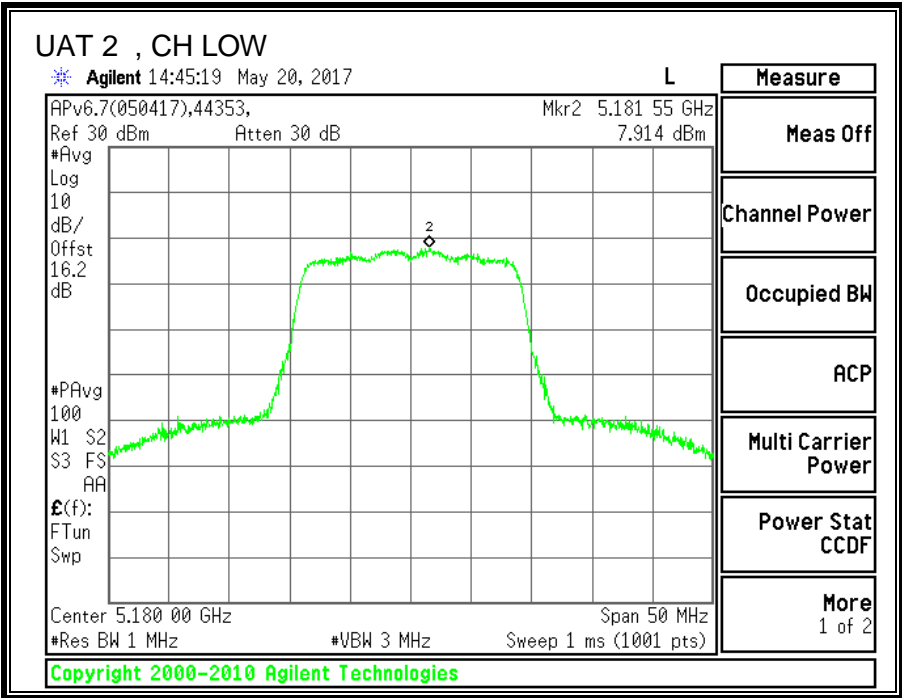

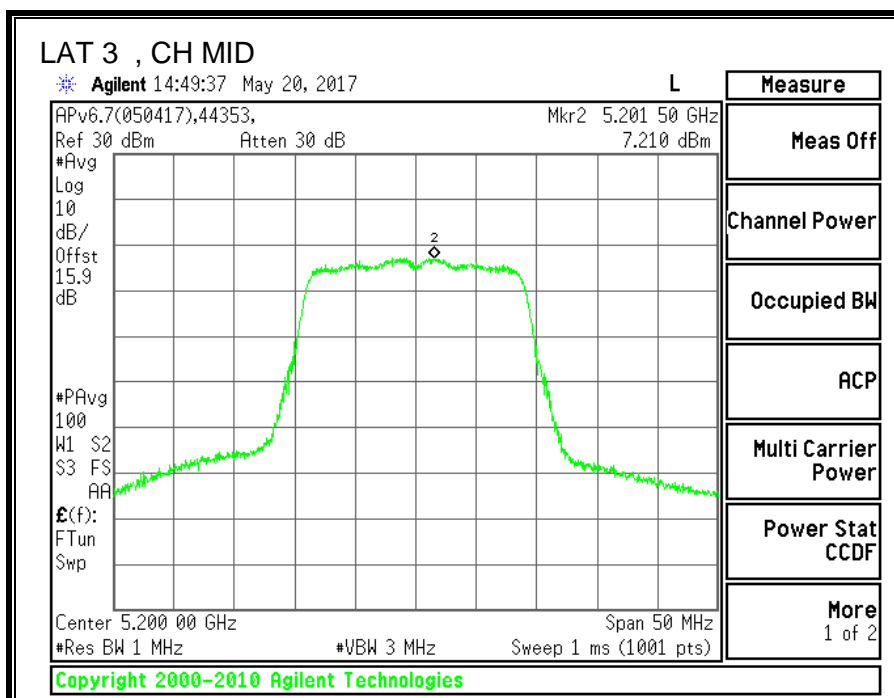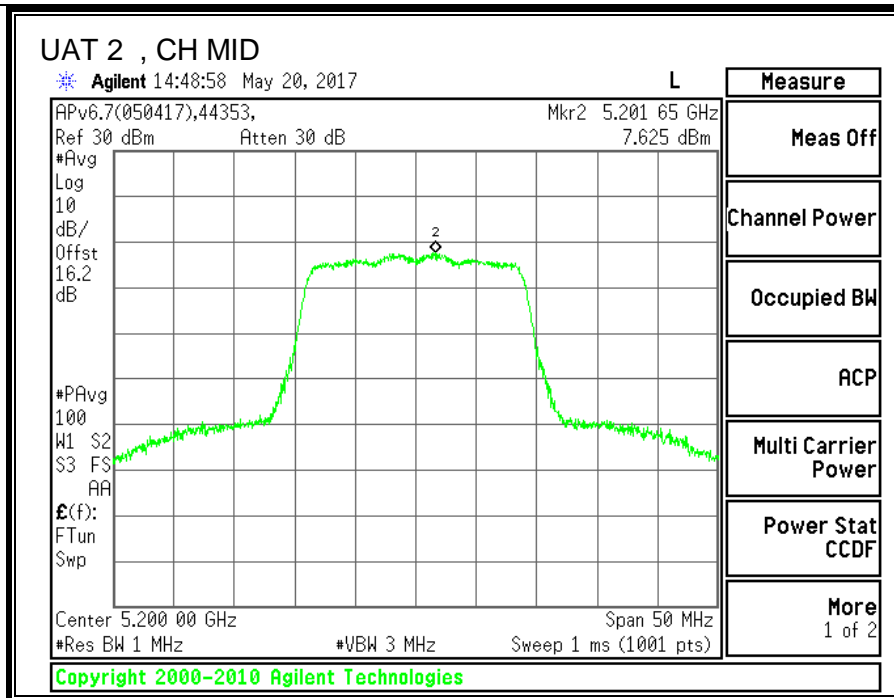

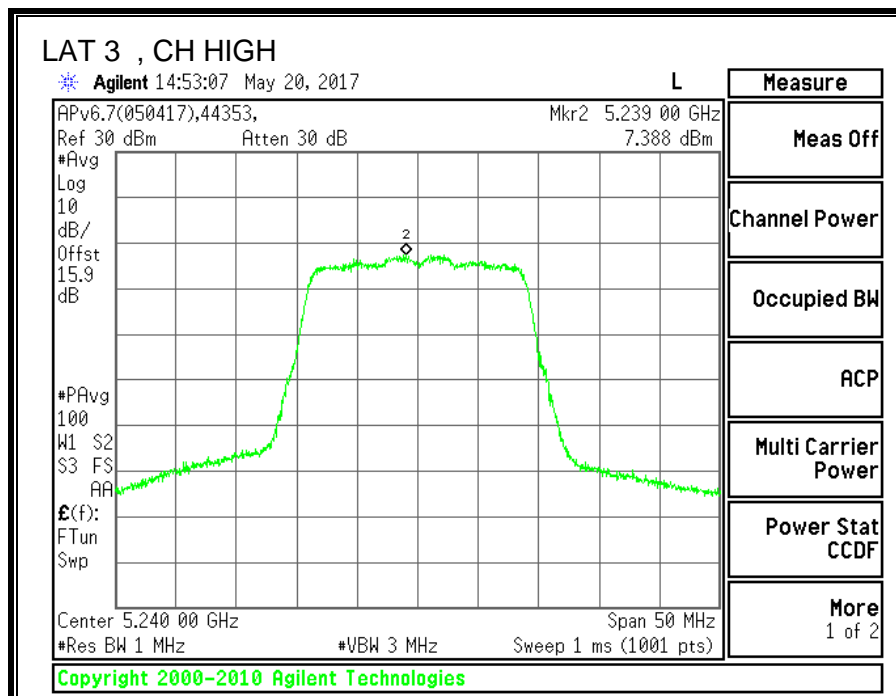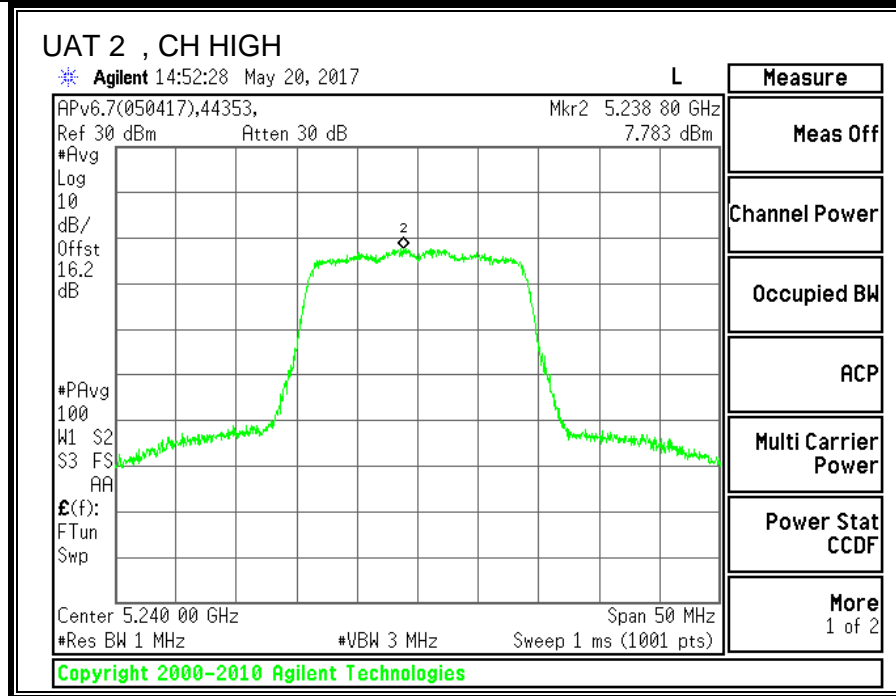

8.4. 11n HT40 UAT 2 SISO MODE IN THE 5.2GHz BAND



8.4.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)
Low	5190	40.5
High	5230	40.4

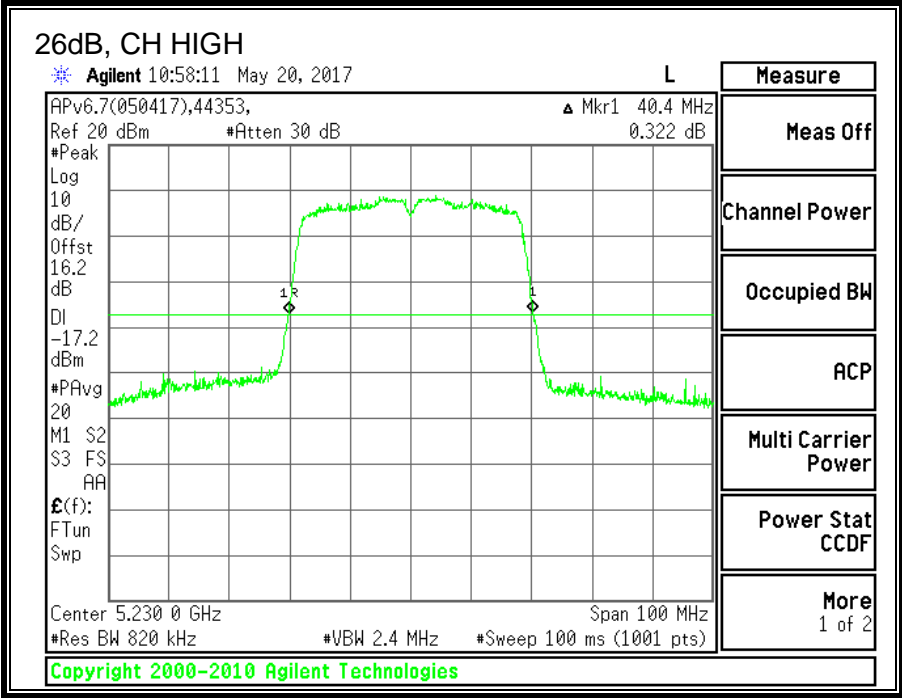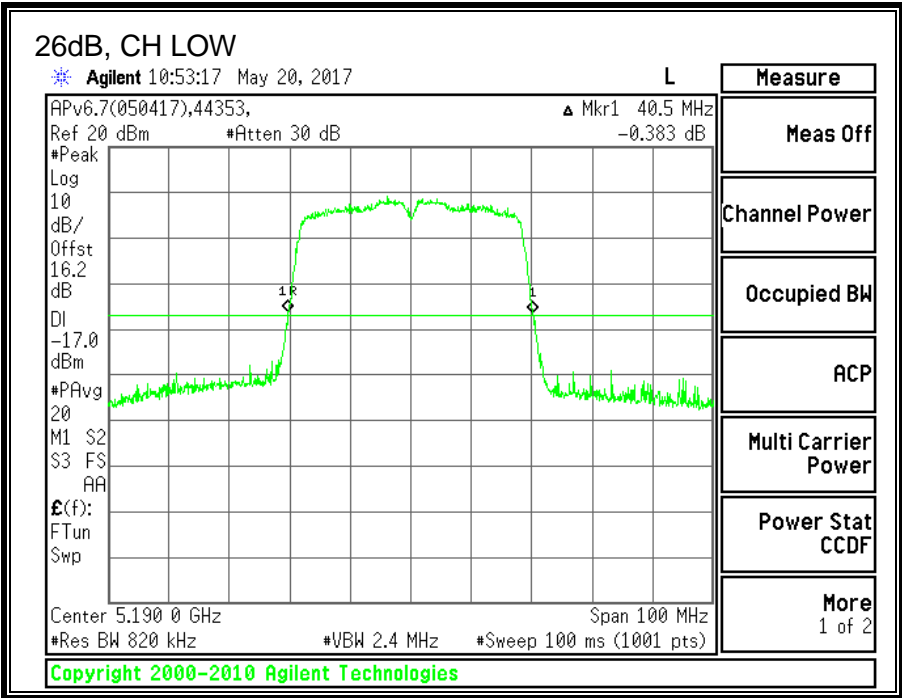



8.4.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)
Low	5190	36.1951
High	5230	36.2145

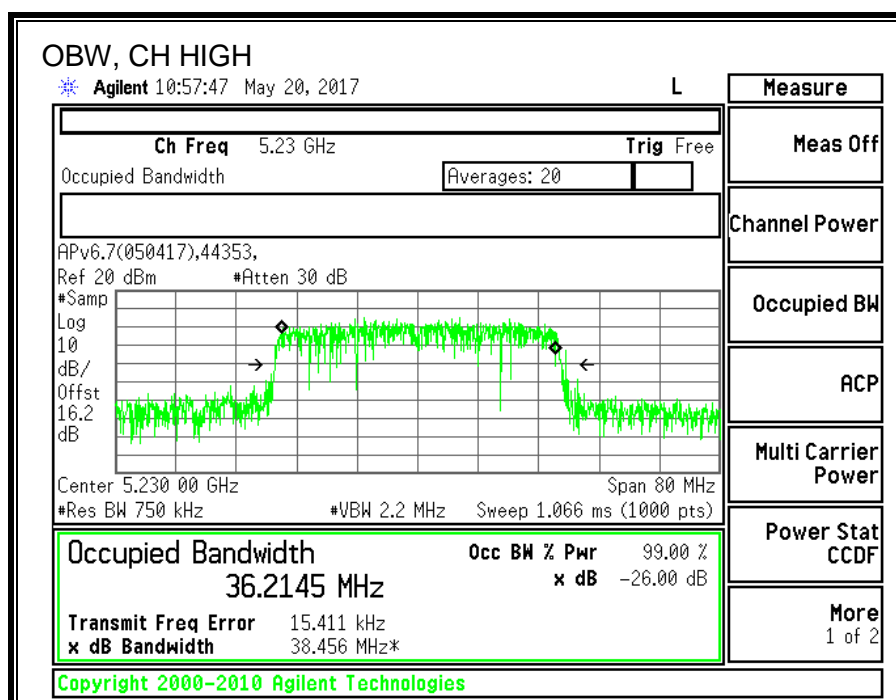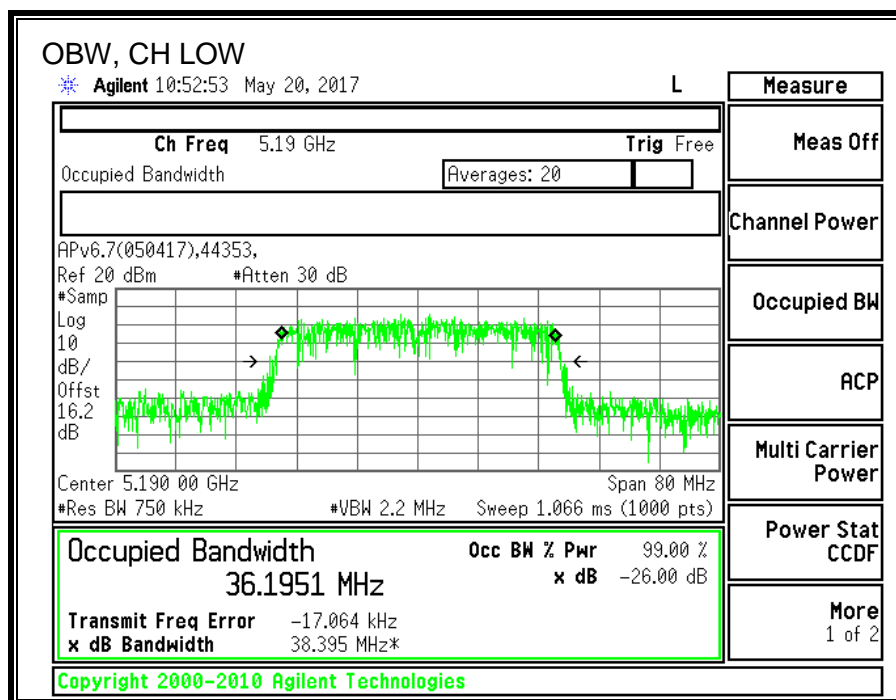

8.4.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power UAT 2 (dBm)
Low	5190	17.95
High	5230	19.37

8.4.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-2.73	-2.73	24.00	11.00
High	5230	-2.73	-2.73	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'PSD
--------------------	------	--------------------------------------

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	17.95	17.95	24.00	-6.05
High	5230	19.37	19.37	24.00	-4.63

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	7.822	7.92	11.00	-3.08
High	5230	8.009	8.11	11.00	-2.89

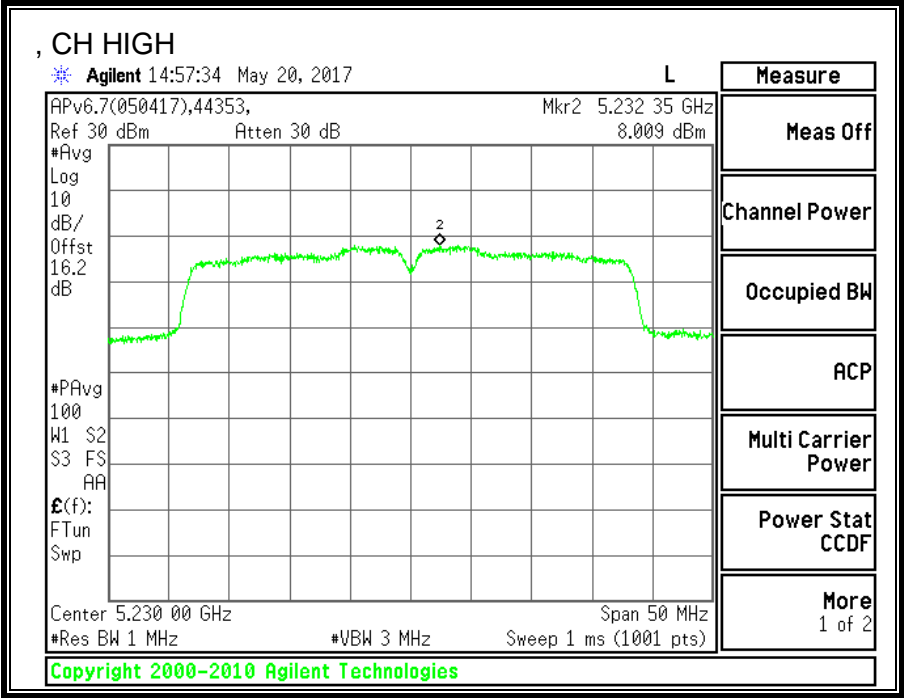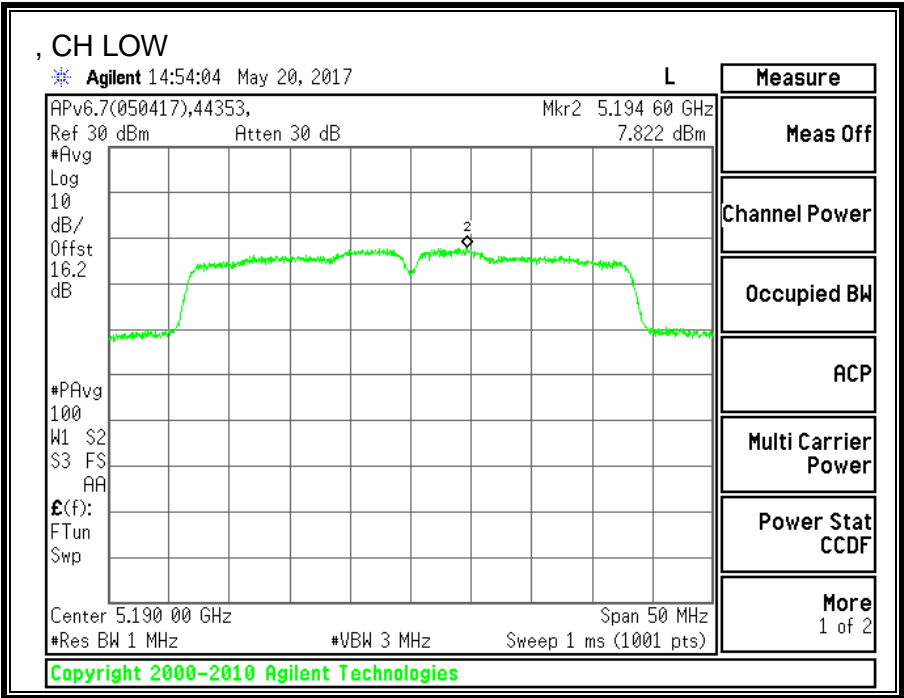

8.5. 11n HT40 LAT 3 SISO MODE IN THE 5.2GHz BAND



8.5.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Low	5190	40.7
High	5230	40.7

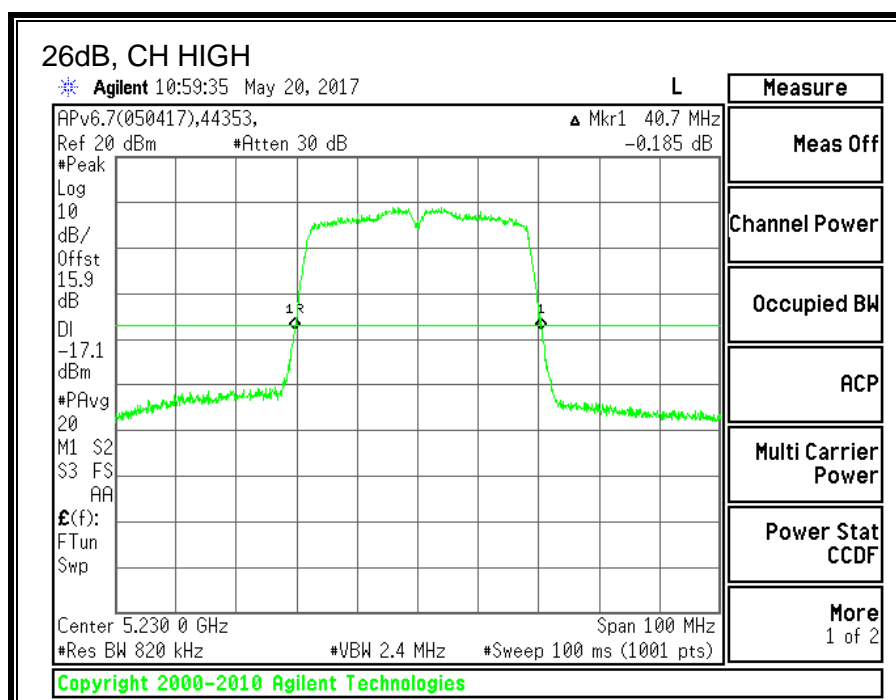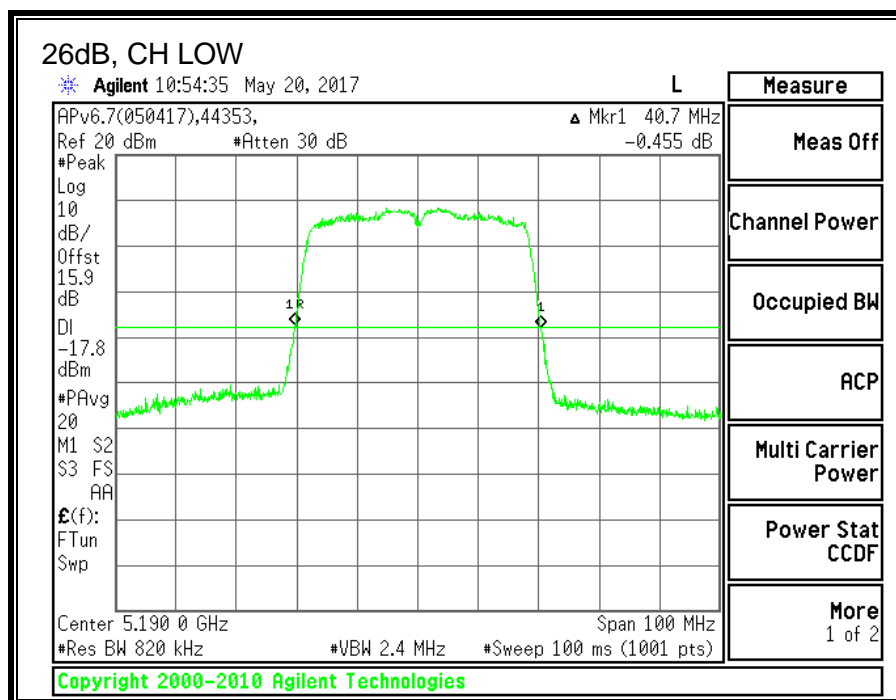



8.5.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW LAT 3 (MHz)
Low	5190	36.0474
High	5230	35.9993

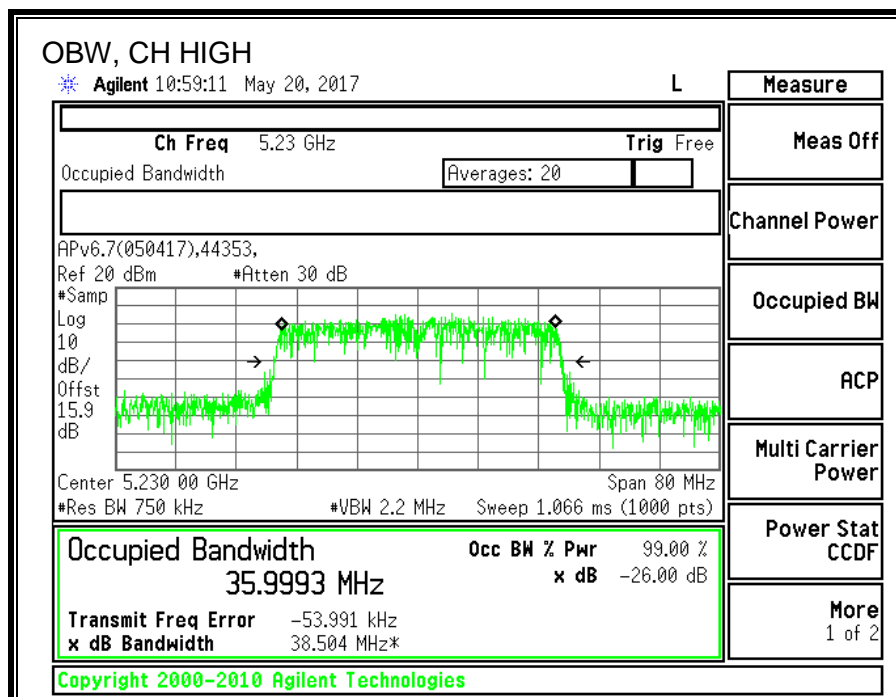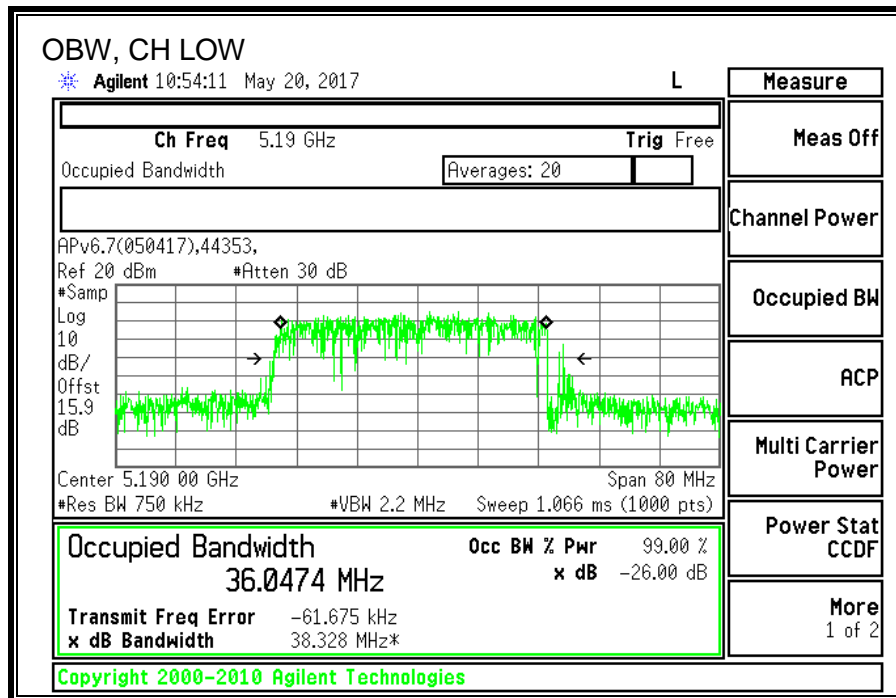

8.5.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power LAT 3 (dBm)
Low	5190	17.94
High	5230	19.44

8.5.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-7.36	-7.36	24.00	11.00
High	5230	-7.36	-7.36	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'PSD
--------------------	------	--------------------------------------

Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	17.94	17.94	24.00	-6.06
High	5230	19.44	19.44	24.00	-4.56

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	8.104	8.20	11.00	-2.80
High	5230	7.890	7.99	11.00	-3.01

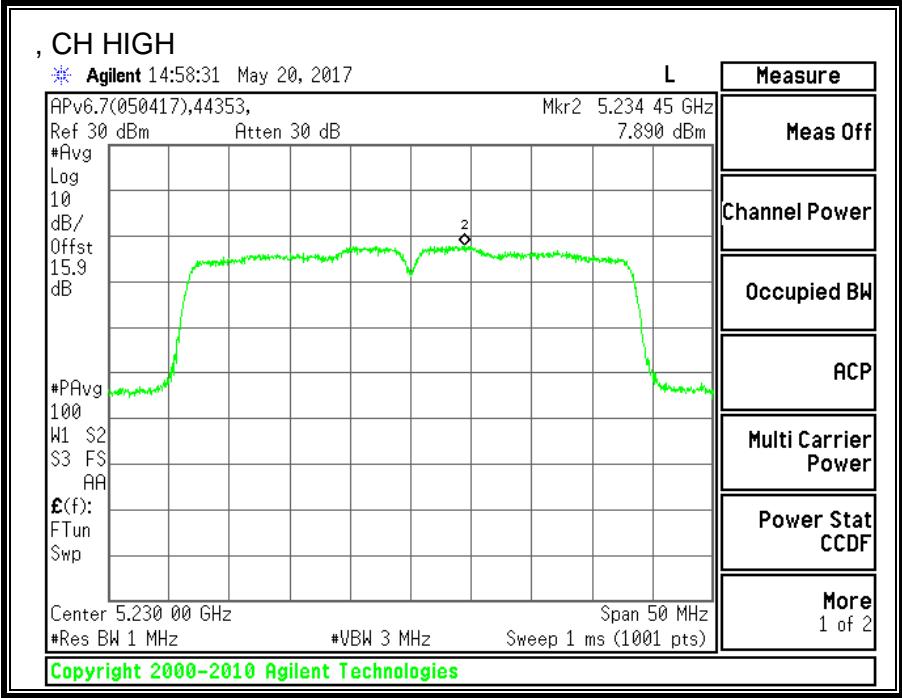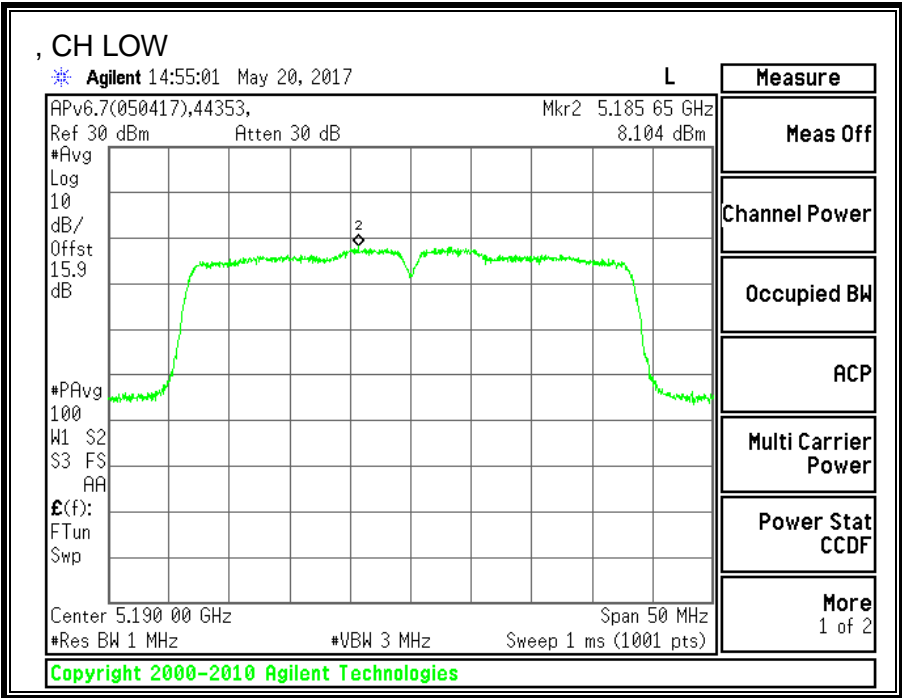

8.6. 11n HT40 2TX CDD MIMO MODE IN THE 5.2GHz BAND



8.6.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)	26 dB BW LAT 3 (MHz)
Low	5190	40.8	40.1
High	5230	40.5	40.1

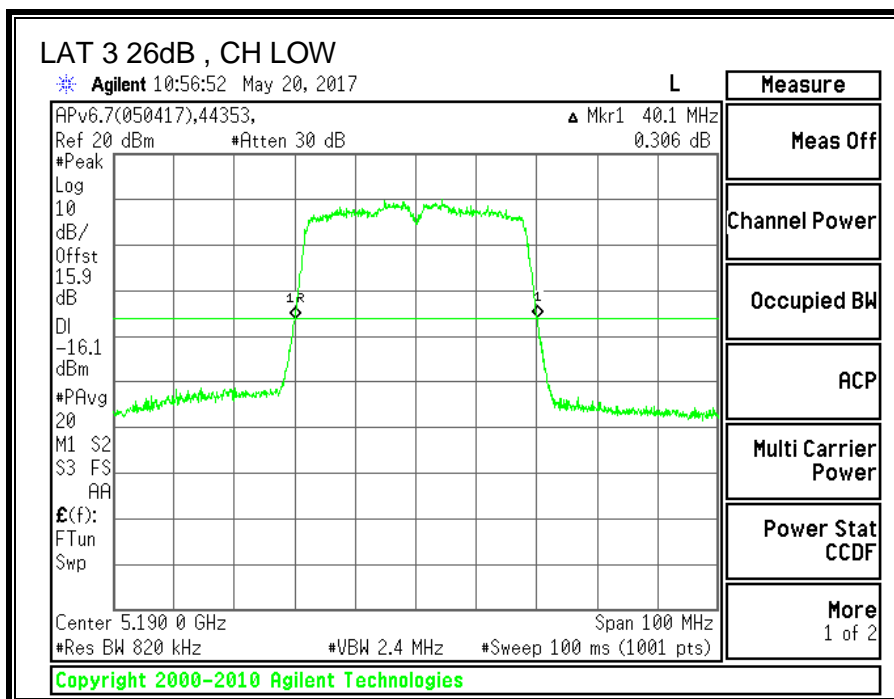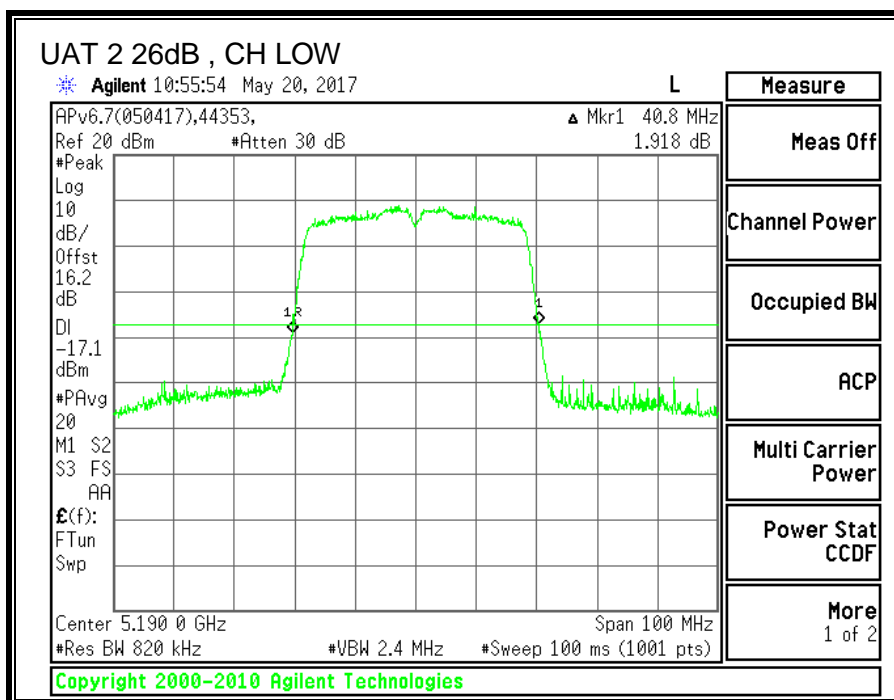

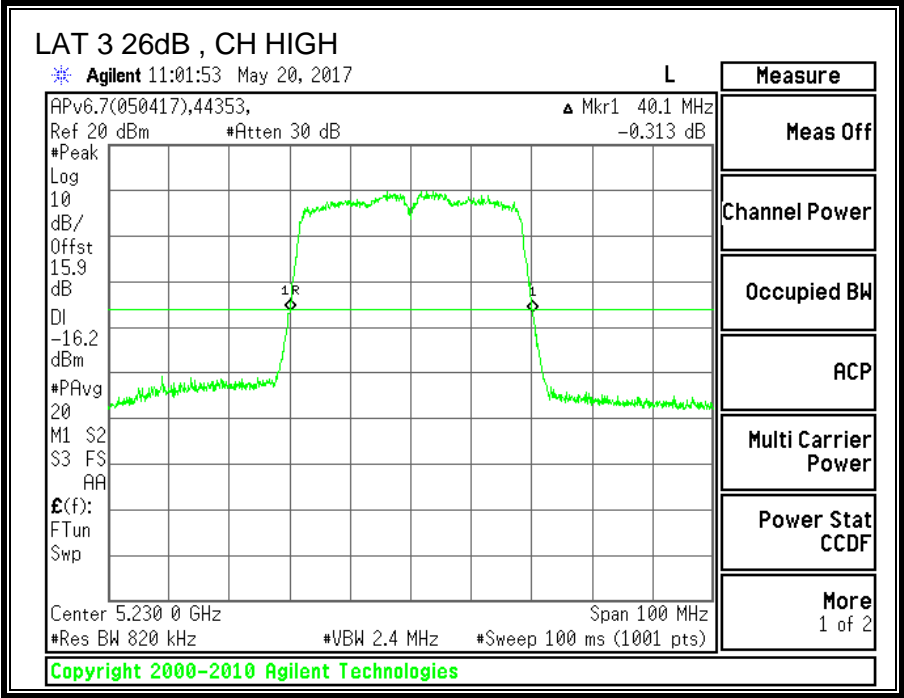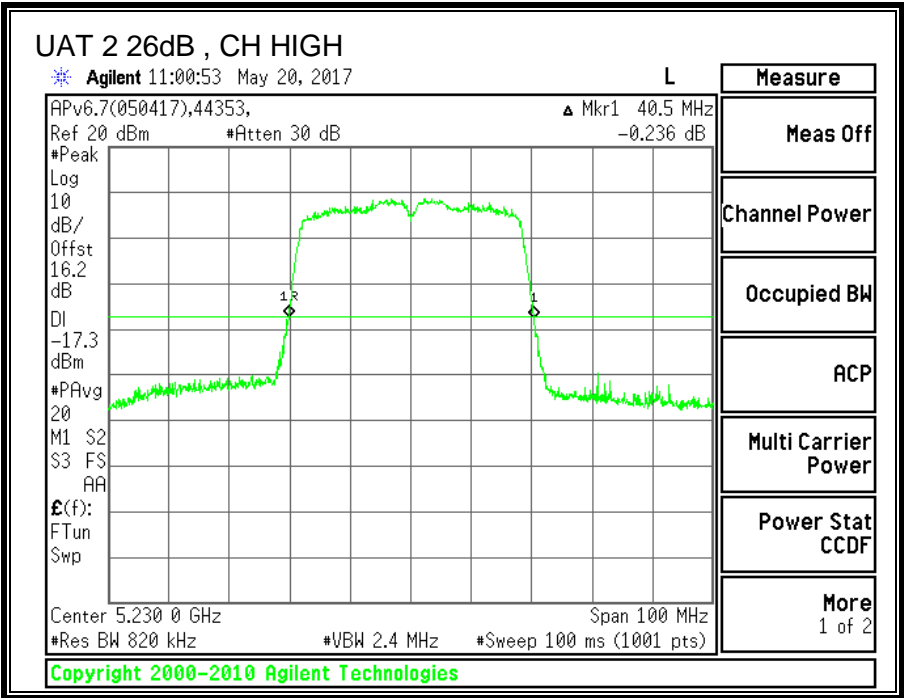



8.6.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)	99% BW LAT 3 (MHz)
Low	5190	36.1773	36.1661
High	5230	36.1647	35.9107

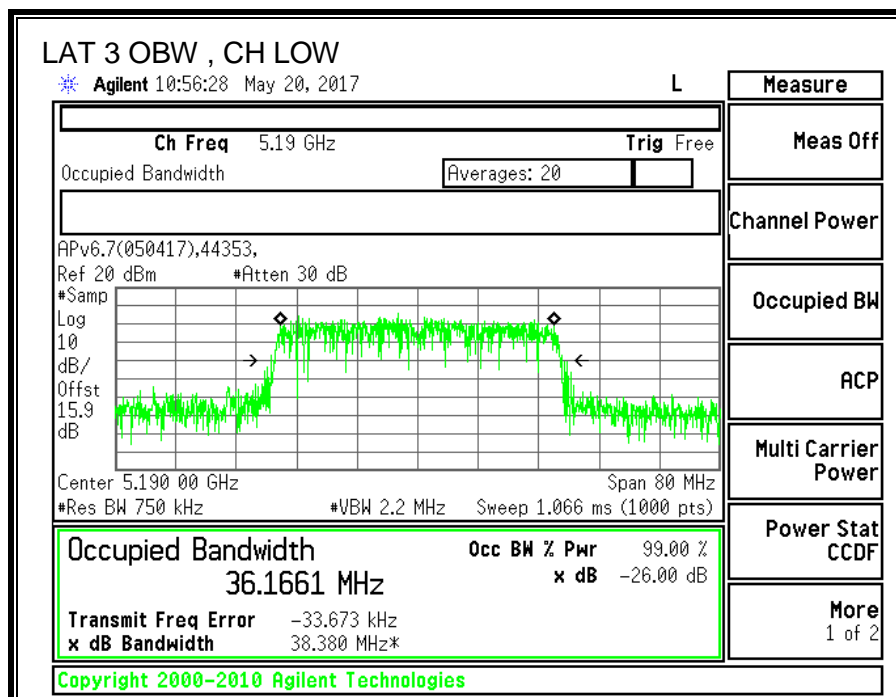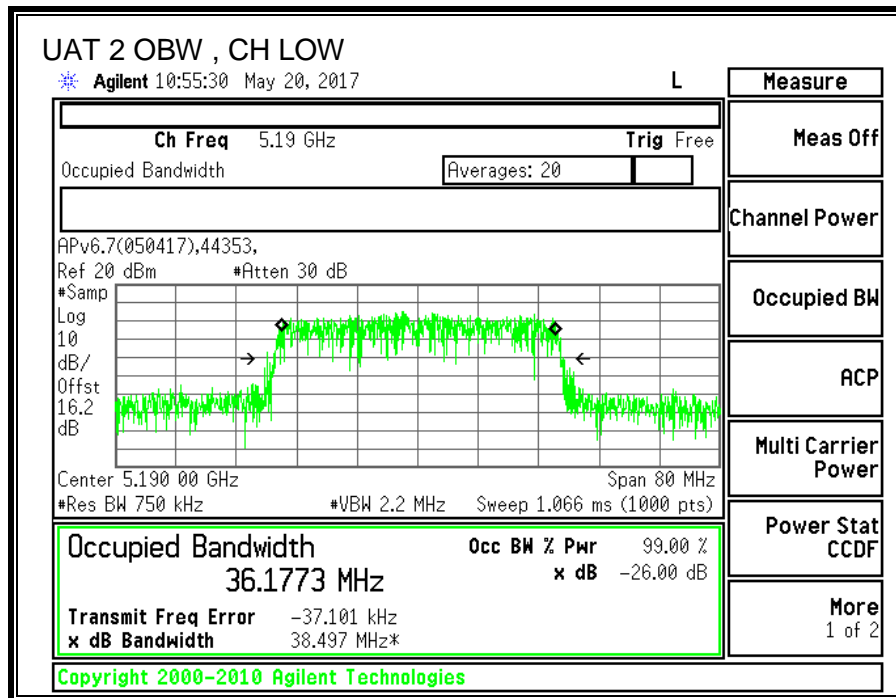

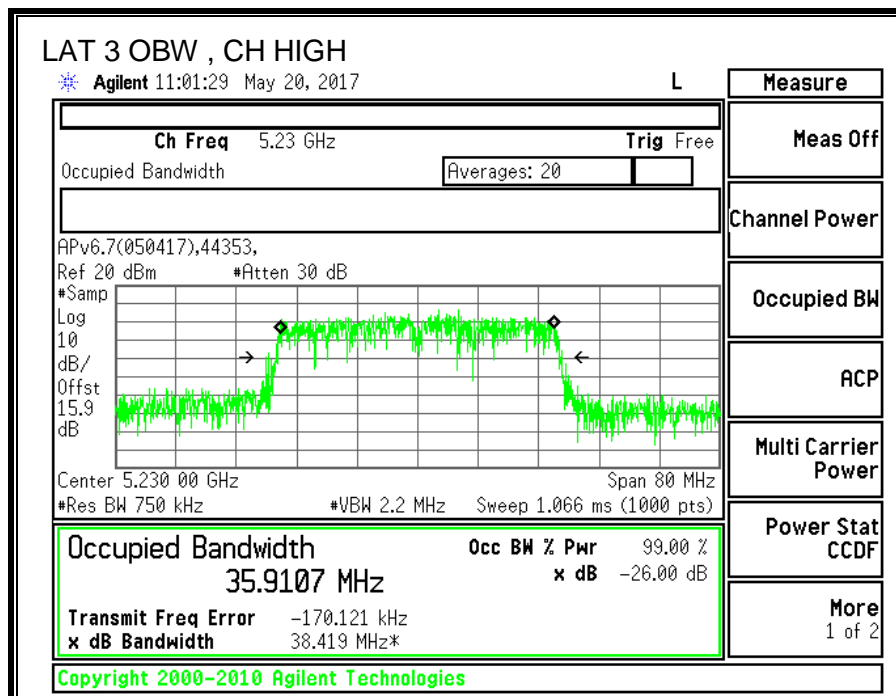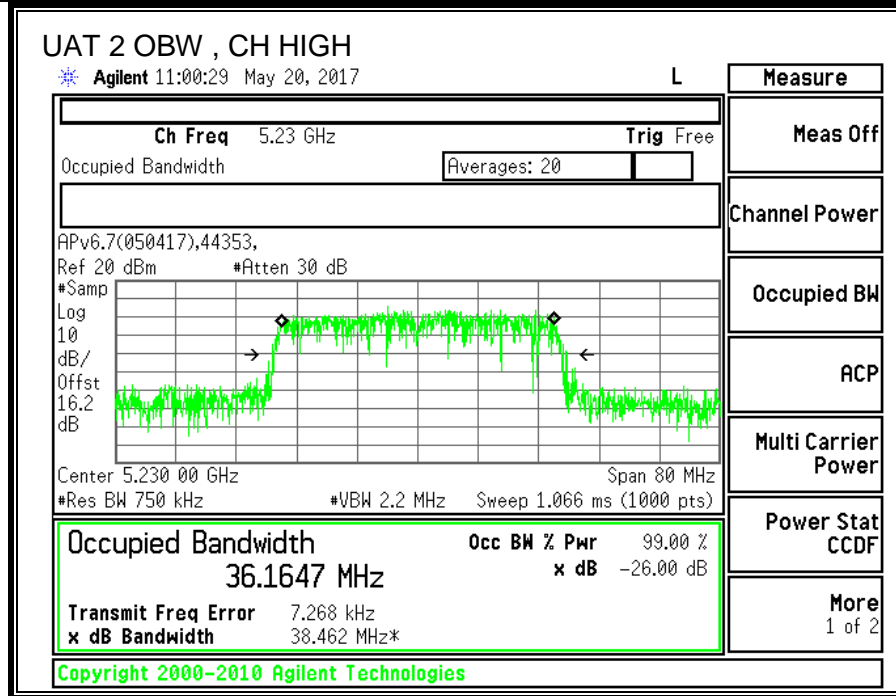

8.6.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Average Power Results

Channel	Frequency (MHz)	UAT 2 Power (dBm)	LAT 3 Power (dBm)	Total Power (dBm)
Low	5190	16.93	16.84	19.90
High	5230	19.46	19.39	22.44

8.6.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

For Power used uncorrelated gain: The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-2.73	-7.36	-4.46

For PSD used correlated gain: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-2.73	-7.36	-1.73

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-4.46	-1.73	24.00	11.00
High	5230	-4.46	-1.73	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	16.93	16.84	19.90	24.00	-4.10
High	5230	19.46	19.39	22.44	24.00	-1.56

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	6.580	6.333	9.569	11.00	-1.43
High	5230	6.471	6.170	9.43	11.00	-1.57

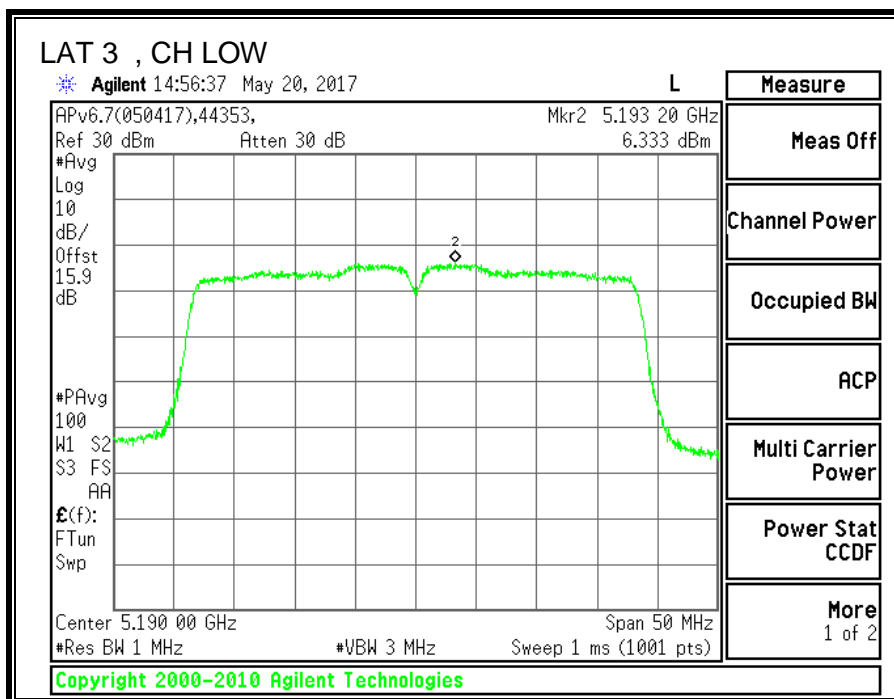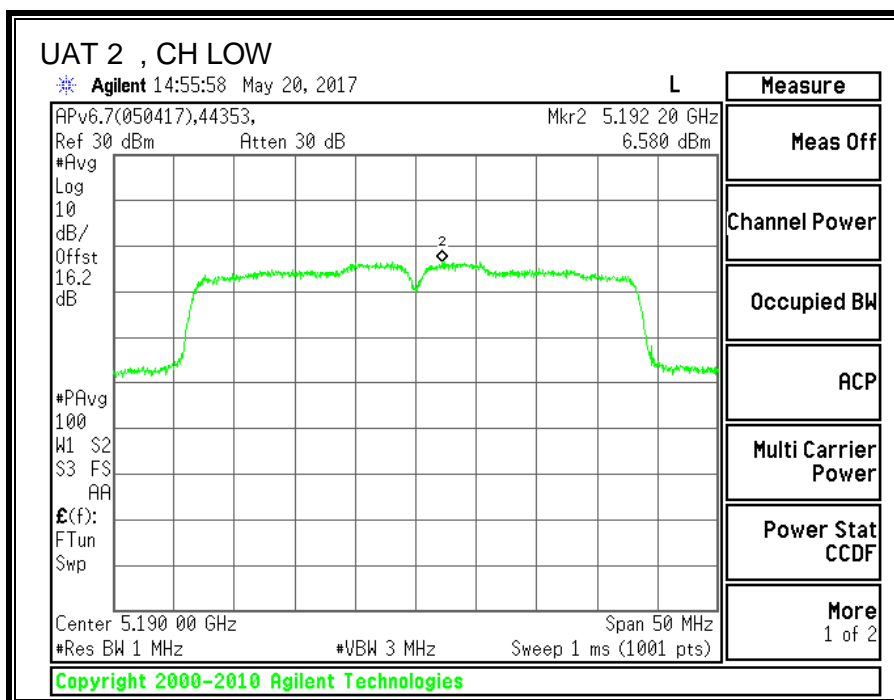

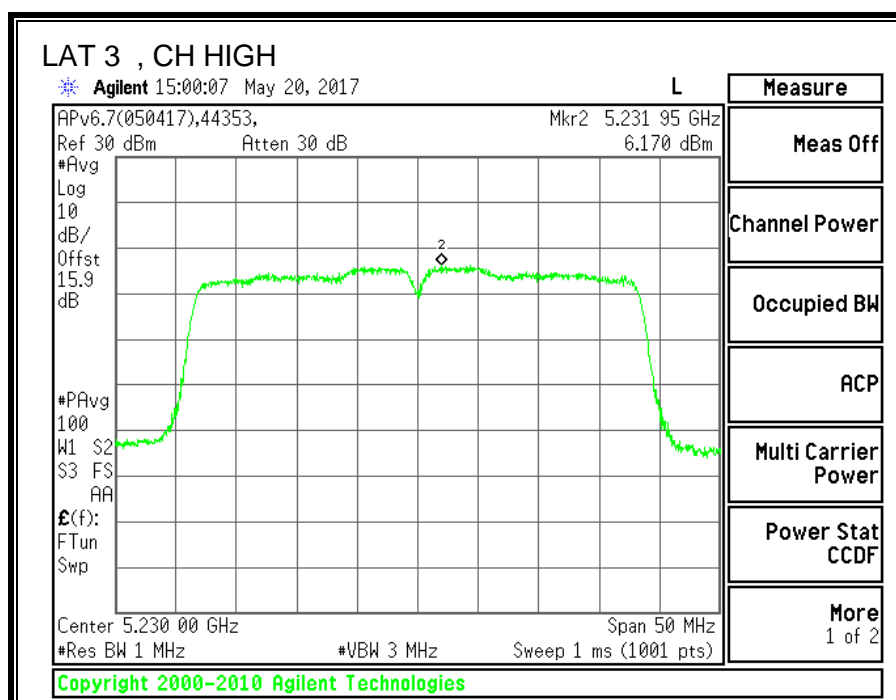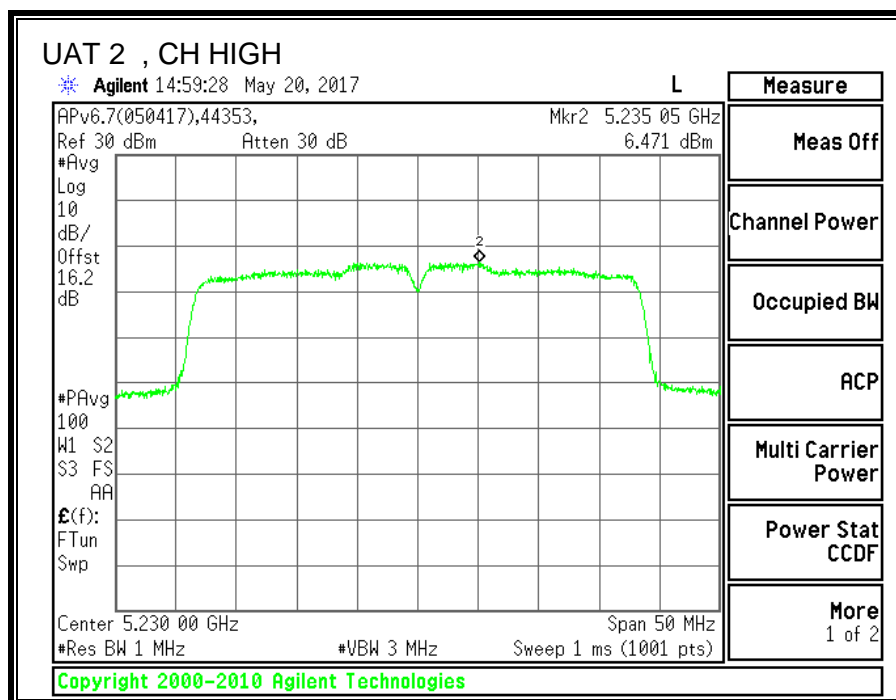

8.7. 11ac HT80 UAT 2 SISO MODE IN THE 5.2GHz BAND


8.7.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)
Mid	5210	82.6

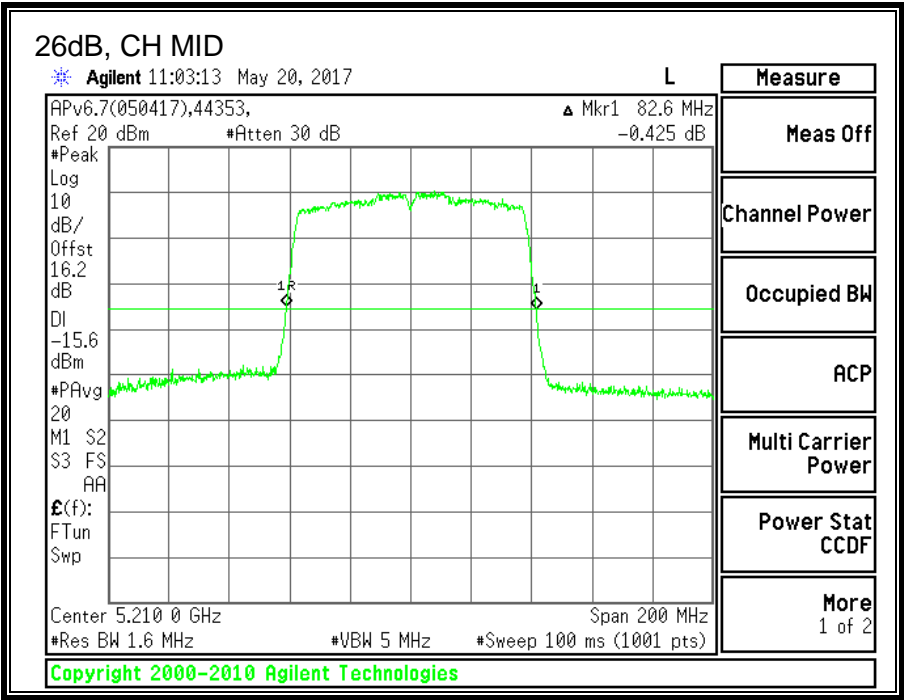


8.7.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)
Mid	5210	75.2578

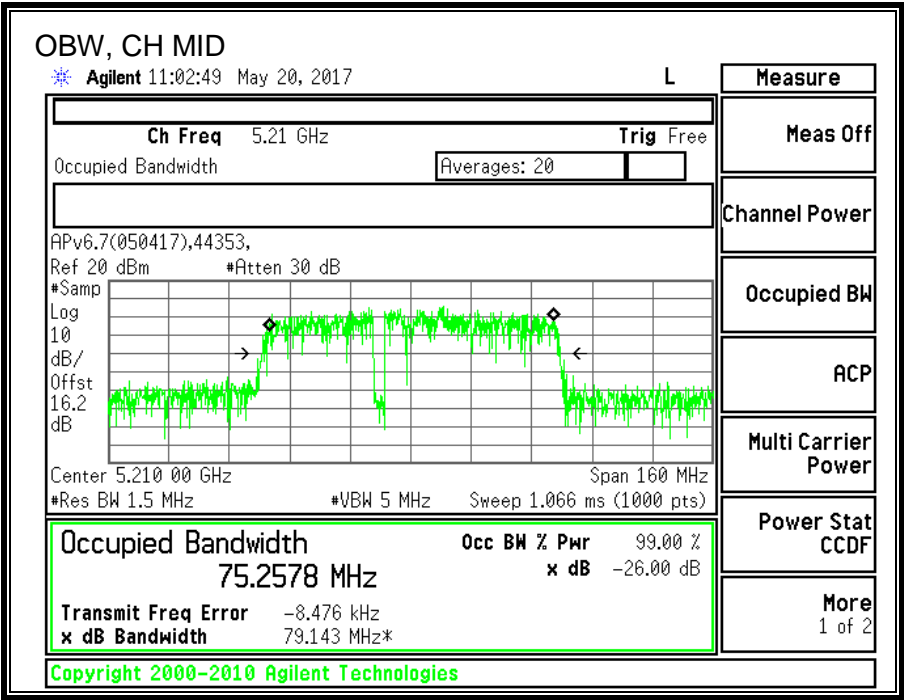

8.7.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power UAT 2 (dBm)
Mid	5210	17.36

8.7.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	-2.73	-2.73	24.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	17.36	17.36	24.00	-6.64

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	4.792	4.98	11.00	-6.02

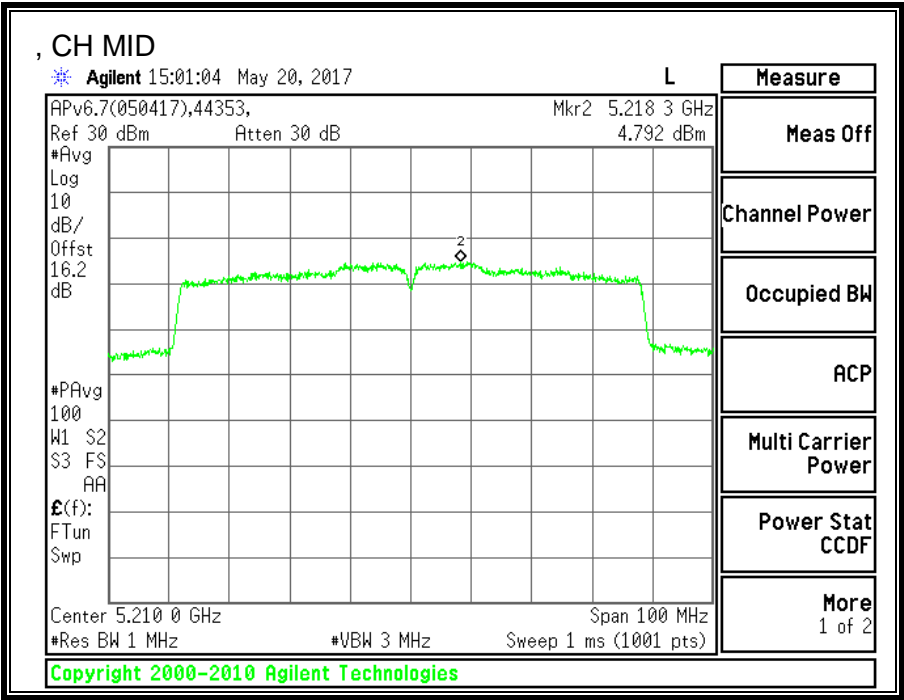

8.8. 11ac HT80 LAT 3 SISO MODE IN THE 5.2GHz BAND


8.8.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Mid	5210	82.4

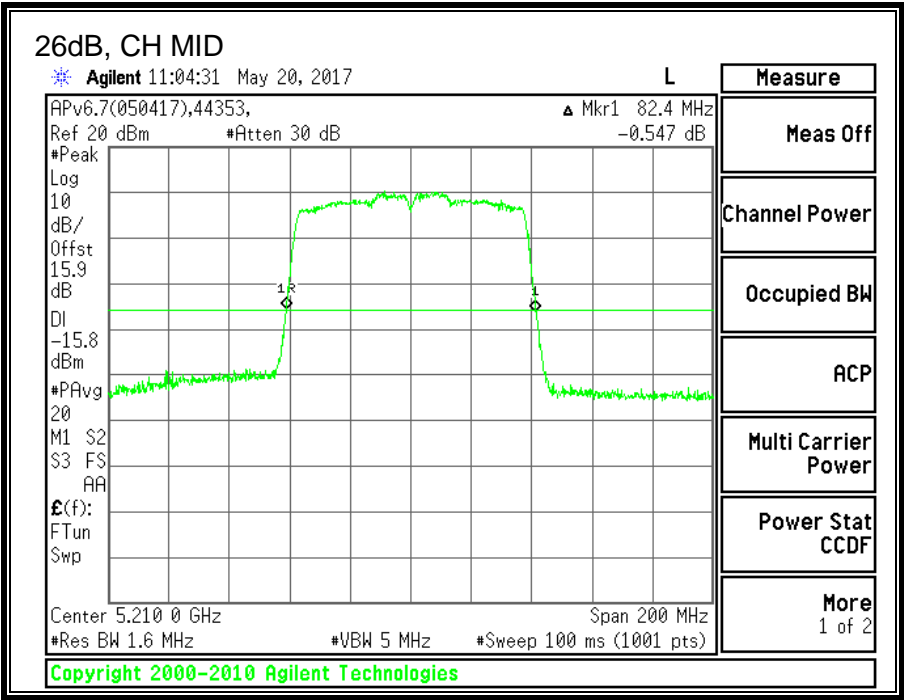


8.8.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW LAT 3 (MHz)
Mid	5210	75.3337

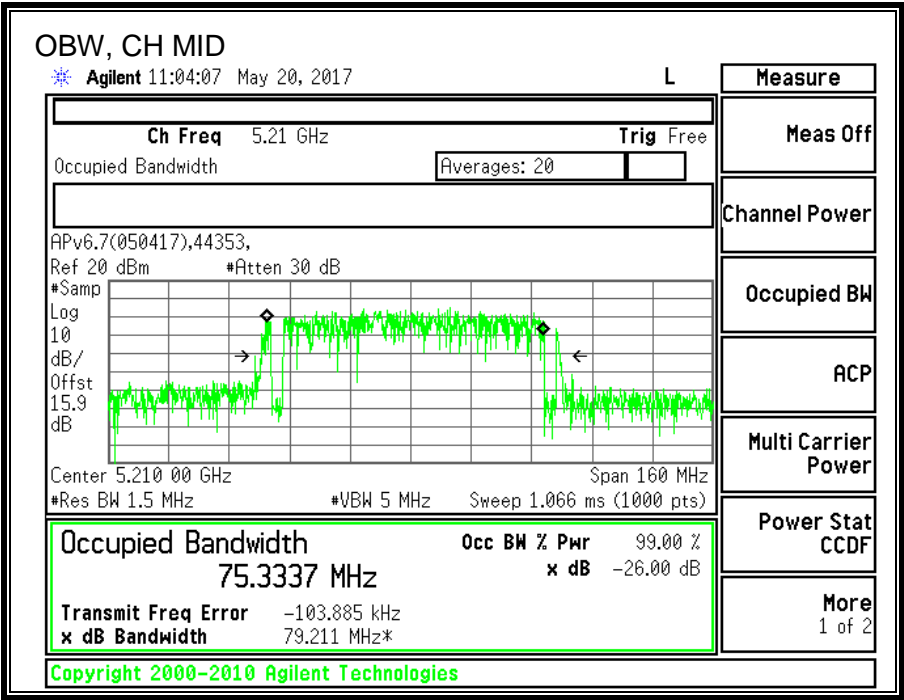

8.8.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power LAT 3 (dBm)
Mid	5210	17.47

8.8.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	-7.36	-7.36	24.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	17.47	17.47	24.00	-6.53

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	5.075	5.27	11.00	-5.74

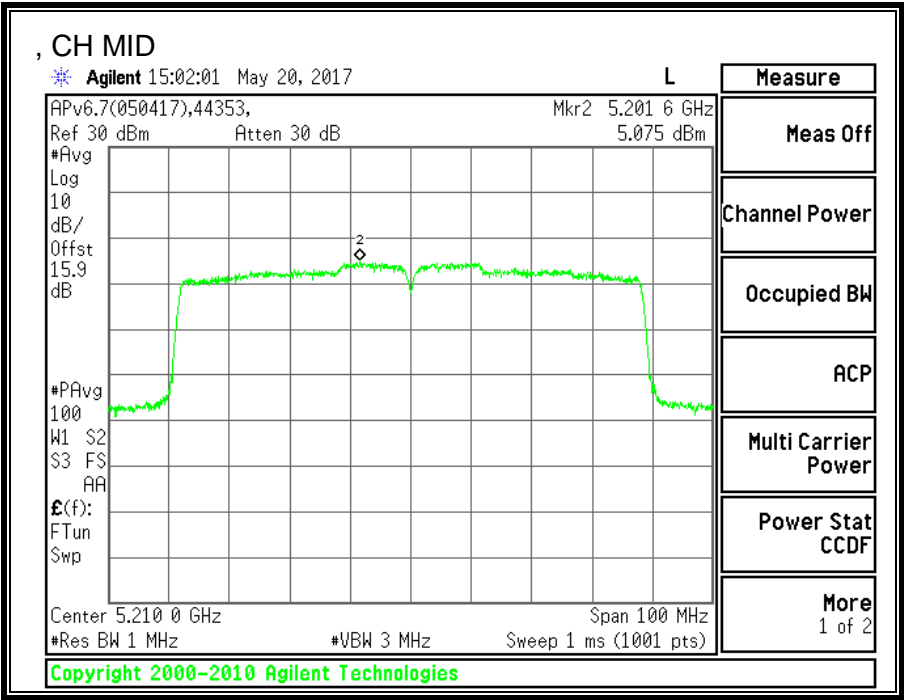

8.9. 11ac HT80 2TX CDD MIMO MODE IN THE 5.2GHz BAND



8.9.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)	26 dB BW LAT 3 (MHz)
Mid	5210	82.4	82.4

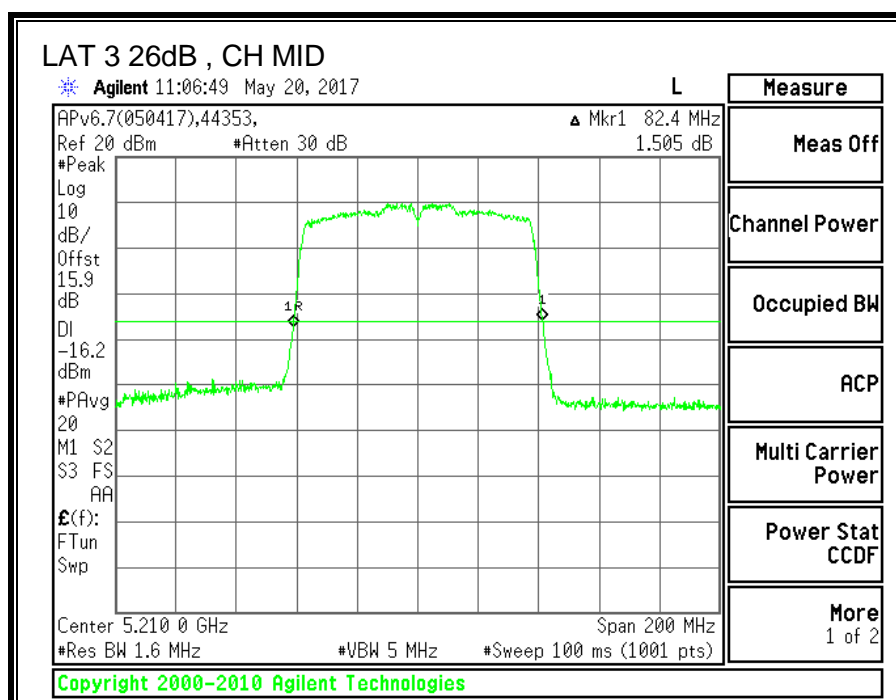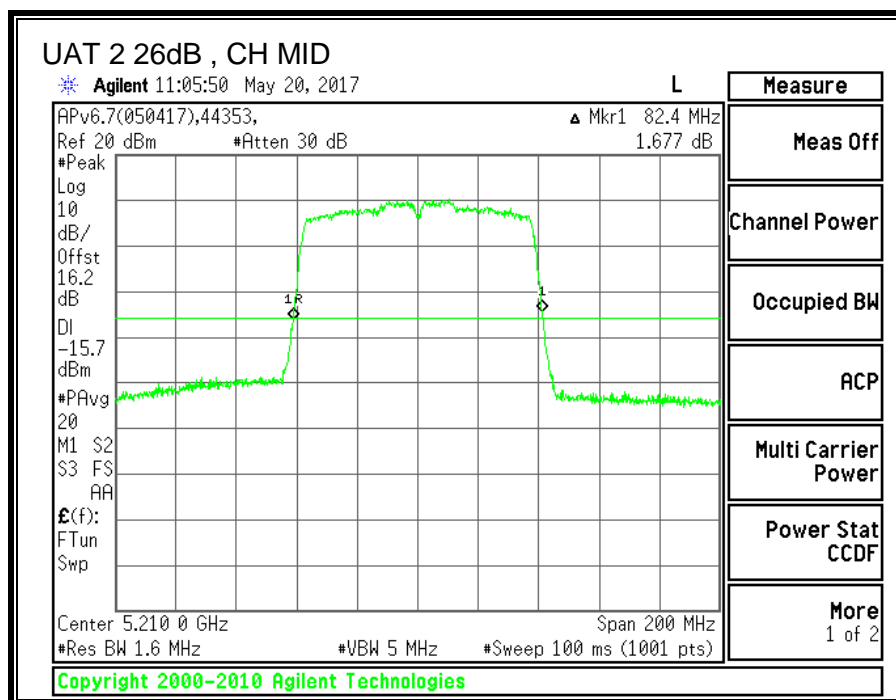



8.9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)	99% BW LAT 3 (MHz)
Mid	5210	75.3802	75.2523

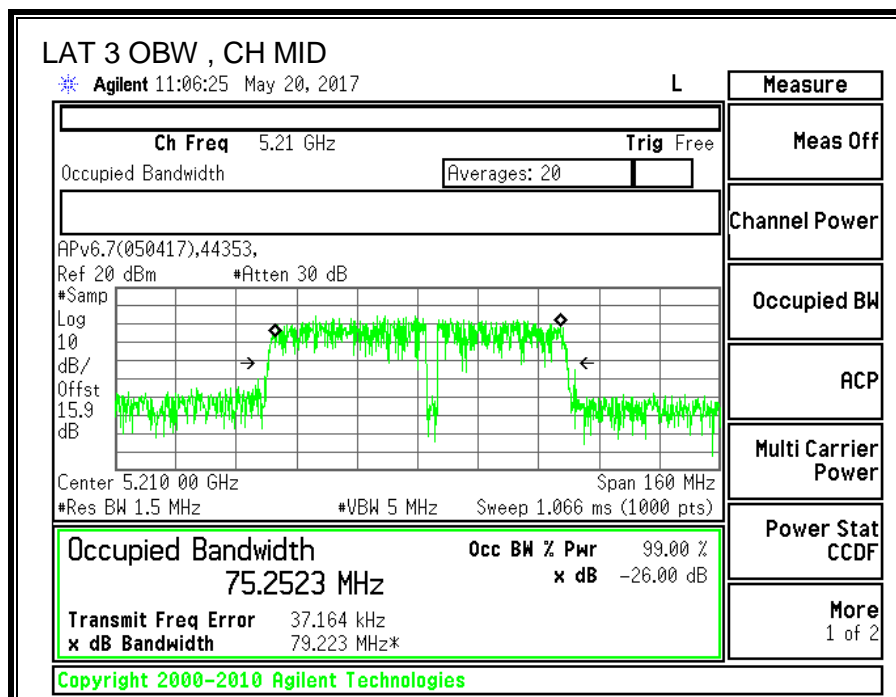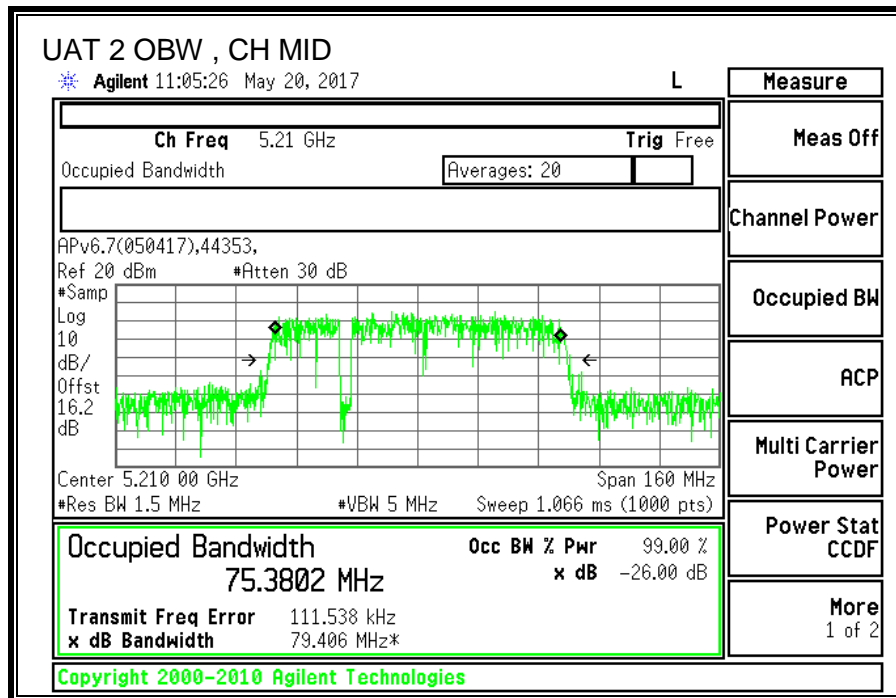

8.9.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	UAT 2 Power (dBm)	LAT 3 Power (dBm)	Total Power (dBm)
Mid	5210	16.42	16.35	19.40

8.9.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

For Power used uncorrelated gain: The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-2.73	-7.36	-4.46

For PSD used correlated gain: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-2.73	-7.36	-1.73

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	-4.46	-1.73	24.00	11.00



Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	16.42	16.35	19.40	24.00	-4.60

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	4.113	3.395	6.97	11.00	-4.03

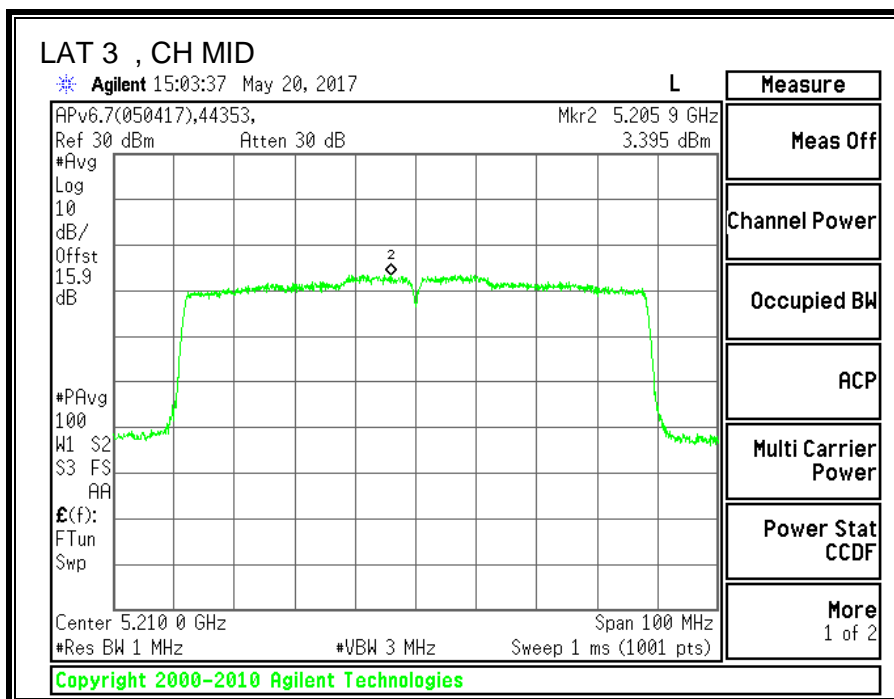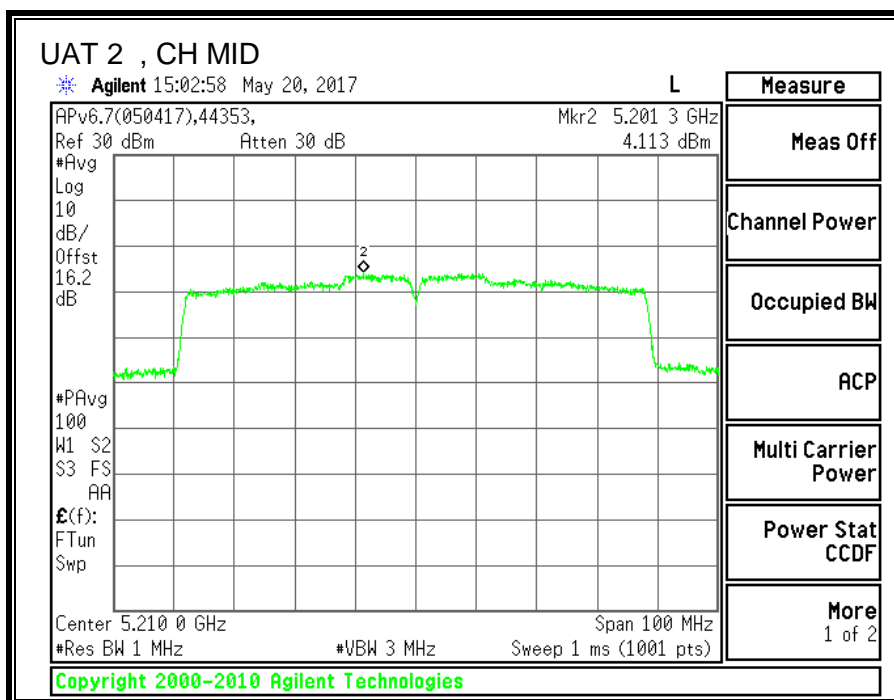

8.10. 11n HT20 UAT 2 SISO MODE IN THE 5.3GHz BAND



8.10.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)
Low	5260	22.05
Mid	5300	22.05
High	5320	21.85

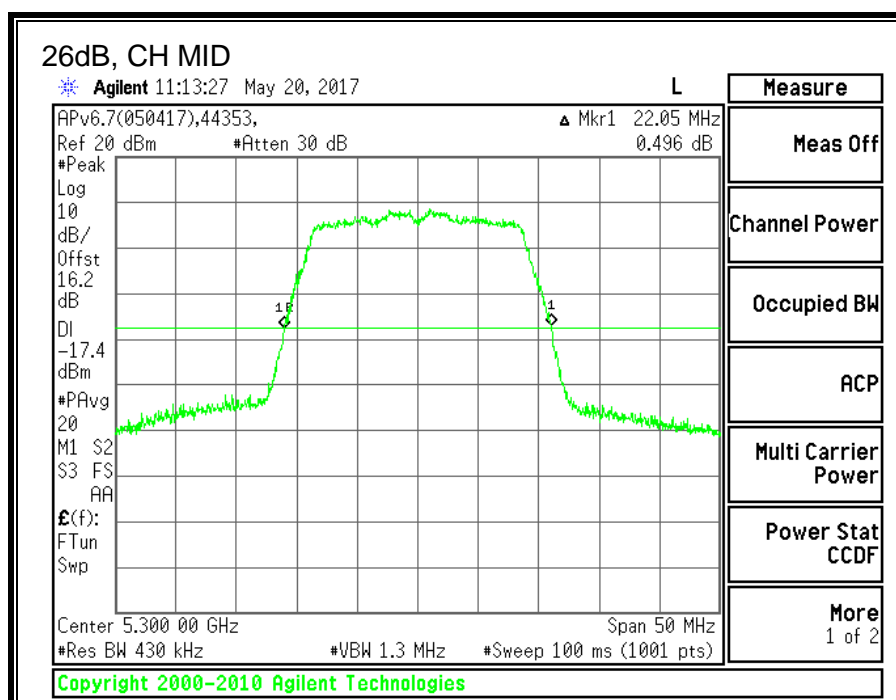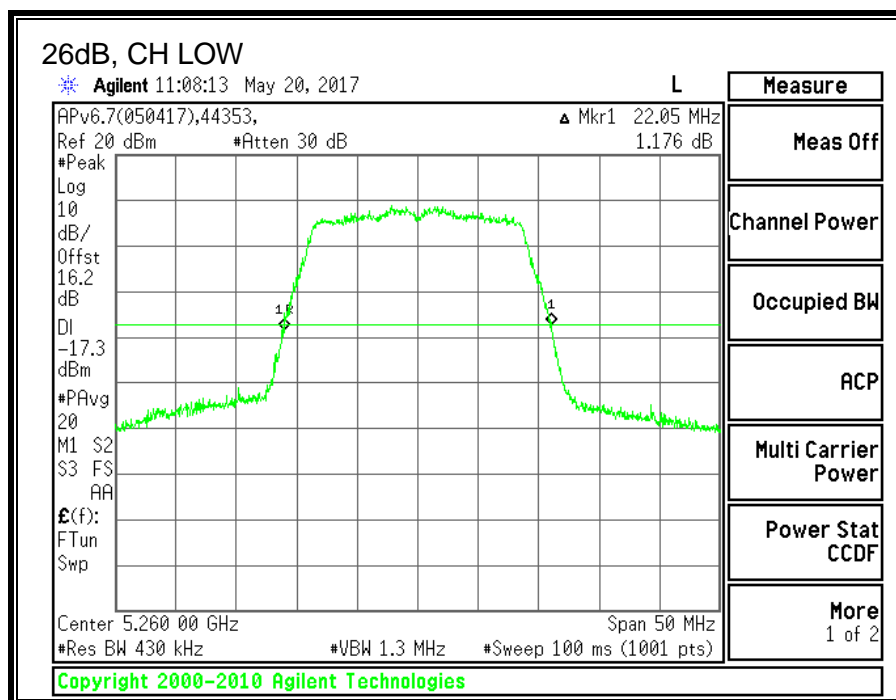

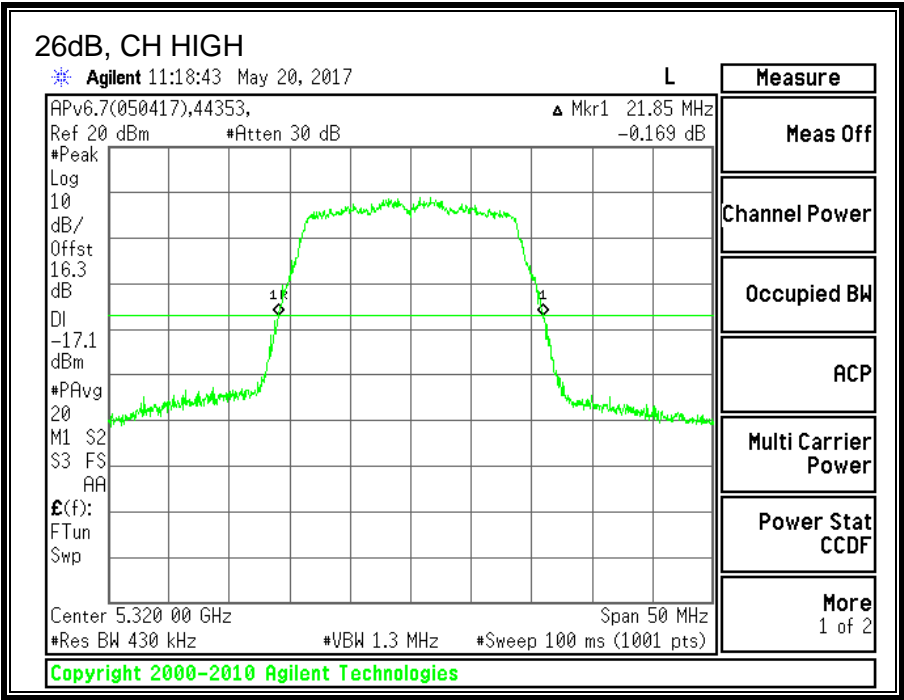



8.10.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)
Low	5260	17.7126
Mid	5300	17.7005
High	5320	17.7265

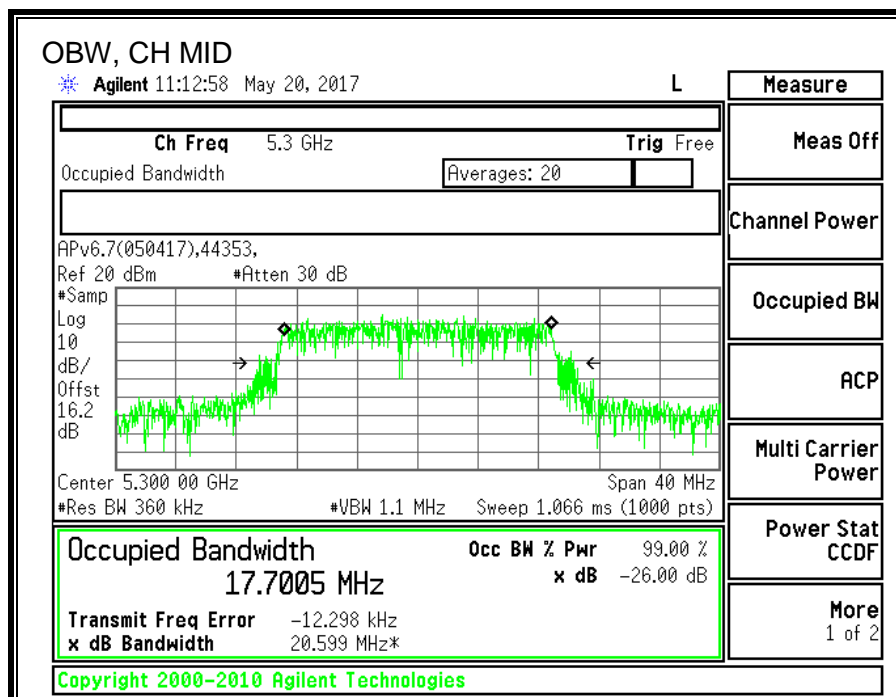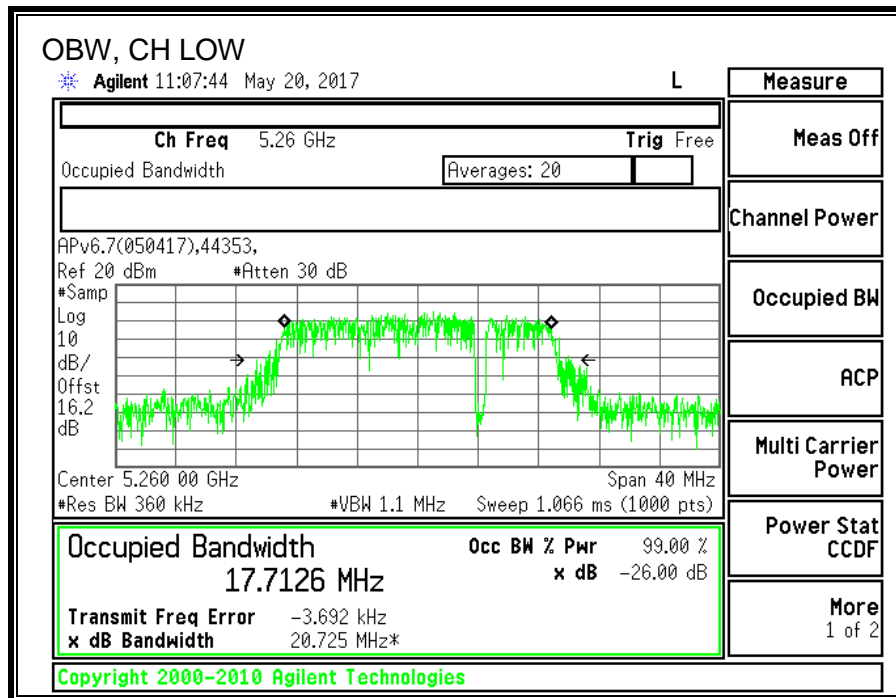

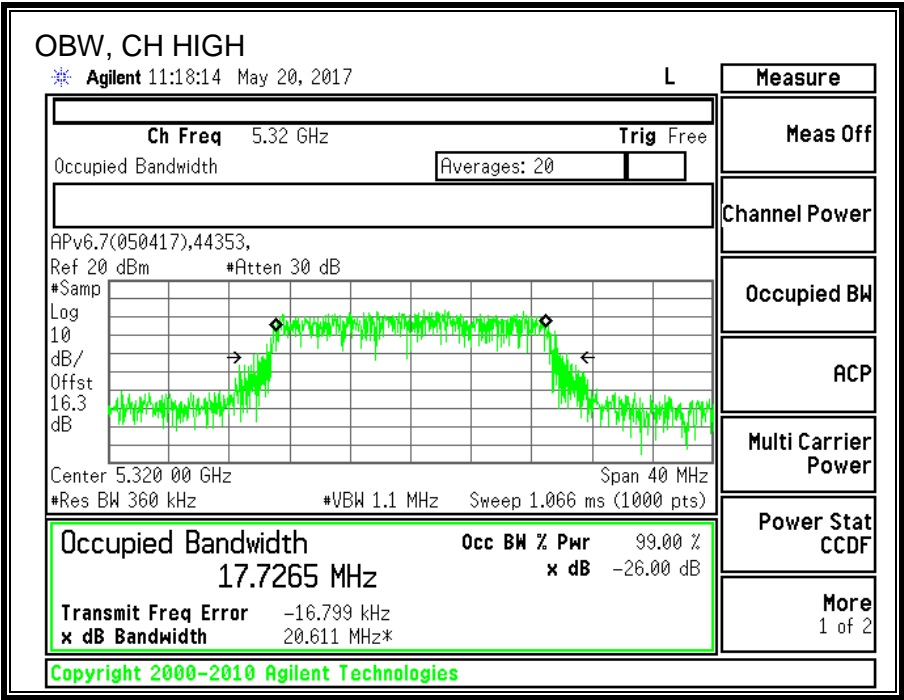

8.10.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power UAT 2 (dBm)
Low	5260	20.86
Mid	5300	20.94
High	5320	18.98

8.10.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	22.050	17.713	-2.88	23.48	11.00
Mid	5300	22.050	17.701	-2.88	23.48	11.00
High	5320	21.850	17.726	-2.88	23.49	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	20.86	20.86	23.48	-2.62
Mid	5300	20.94	20.94	23.48	-2.54
High	5320	18.98	18.98	23.49	-4.51

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	9.105	9.11	11.00	-1.90
Mid	5300	9.244	9.24	11.00	-1.76
High	5320	9.119	9.12	11.00	-1.88

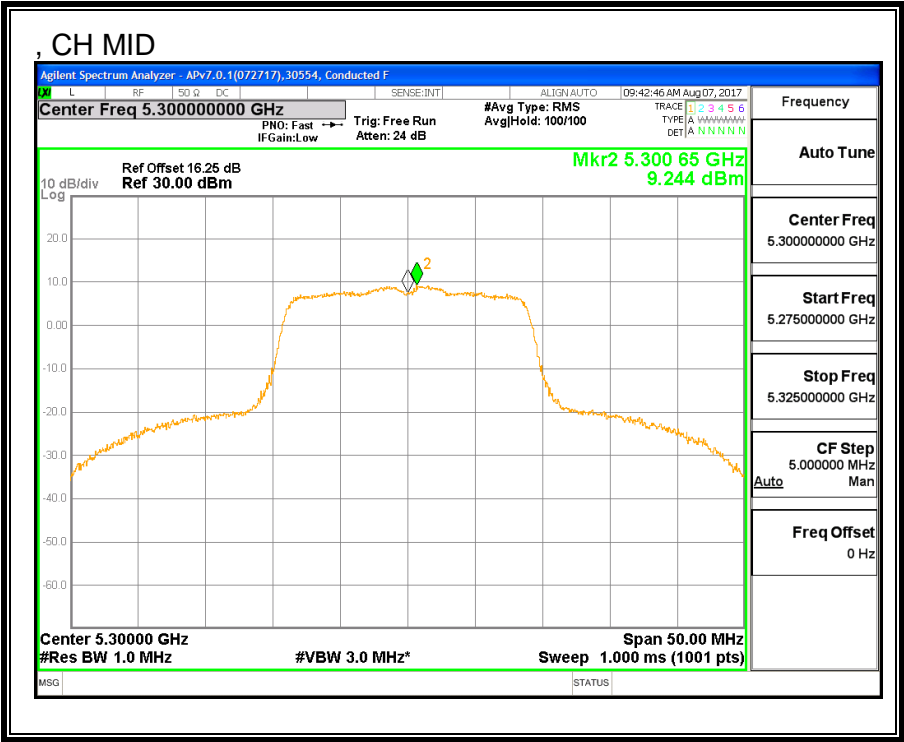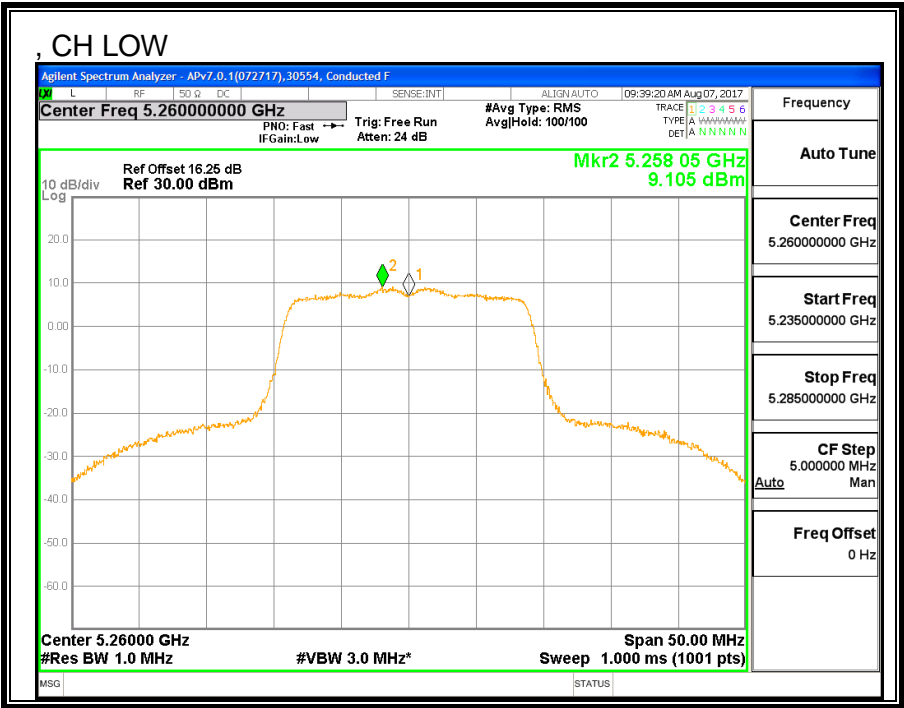

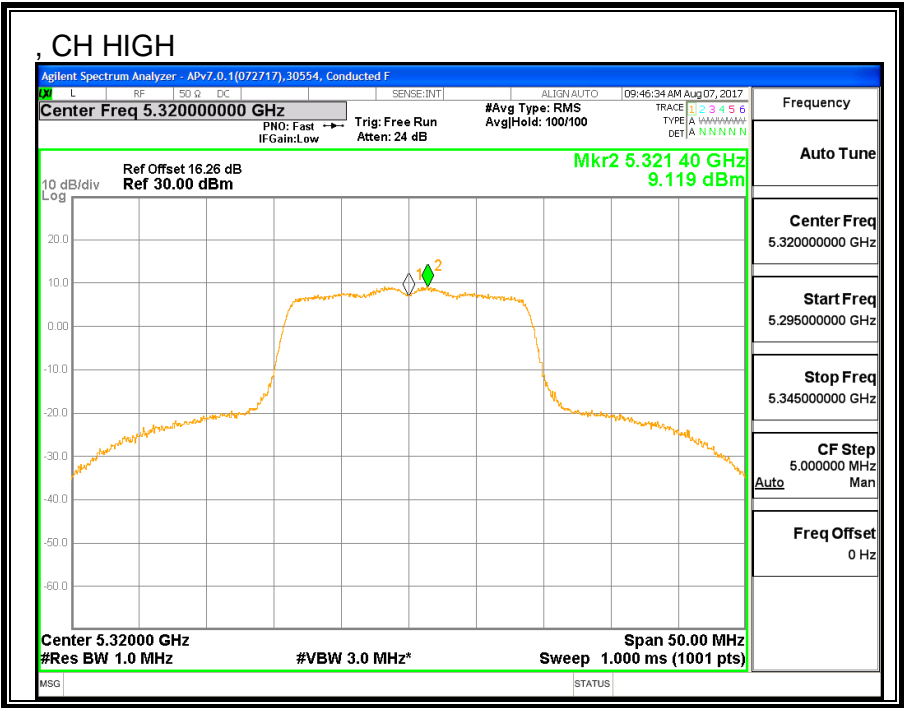

8.11. 11n HT20 LAT 3 SISO MODE IN THE 5.3GHz BAND



8.11.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Low	5260	22.00
Mid	5300	21.95
High	5320	22.00

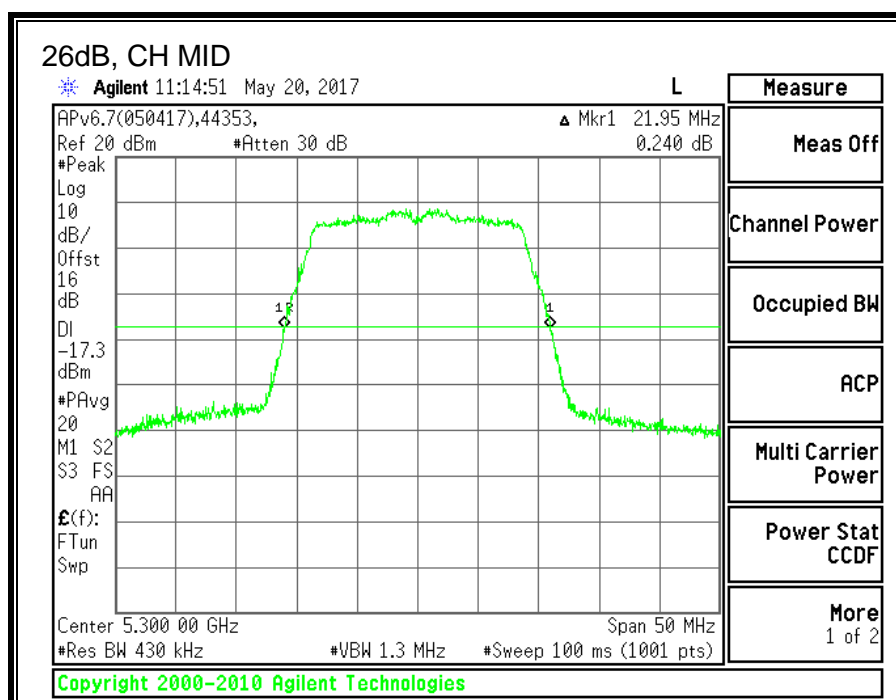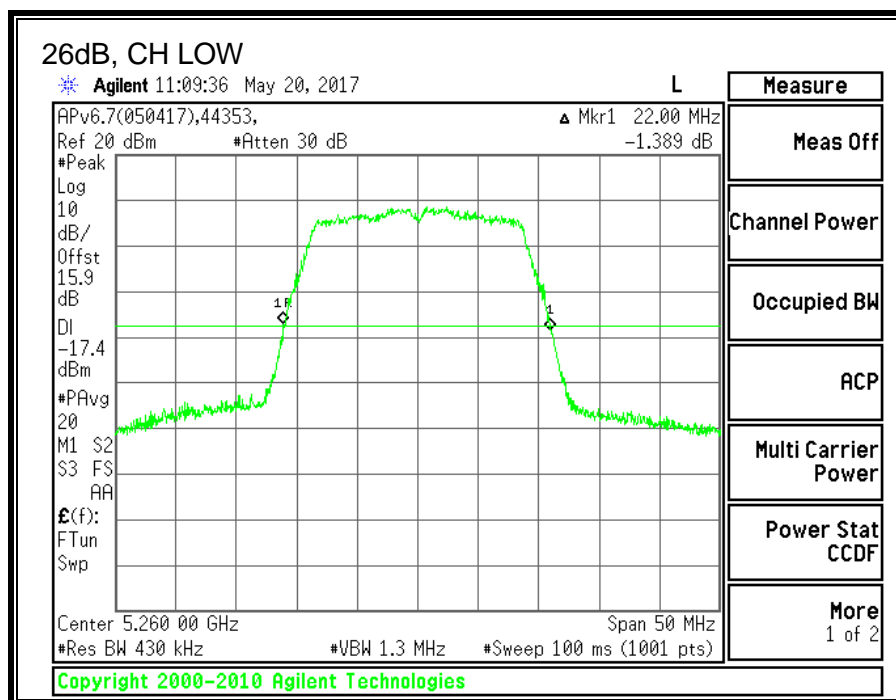

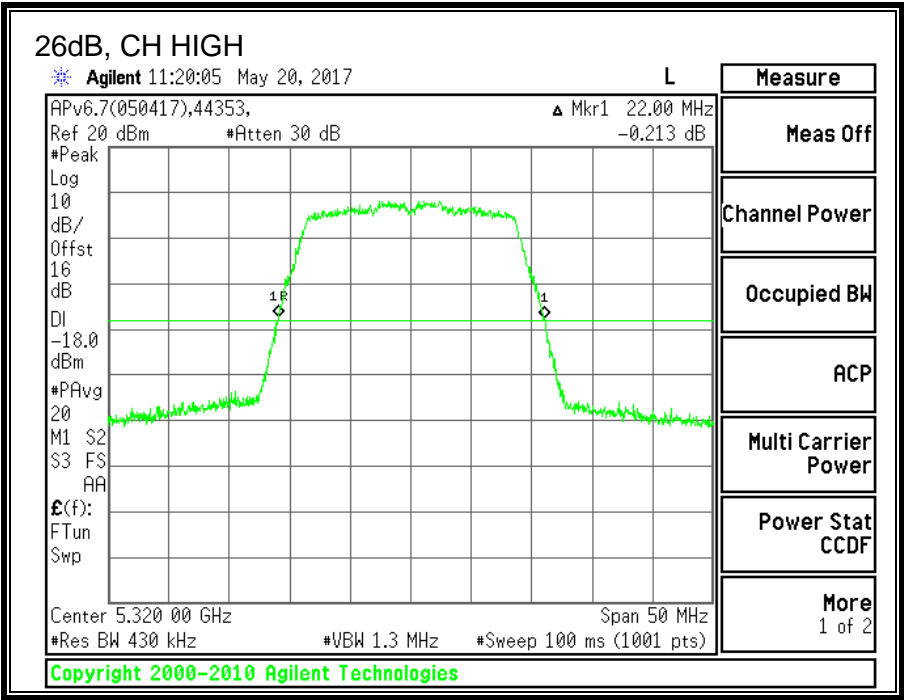



8.11.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW LAT 3 (MHz)
Low	5260	17.6943
Mid	5300	17.7109
High	5320	17.7241

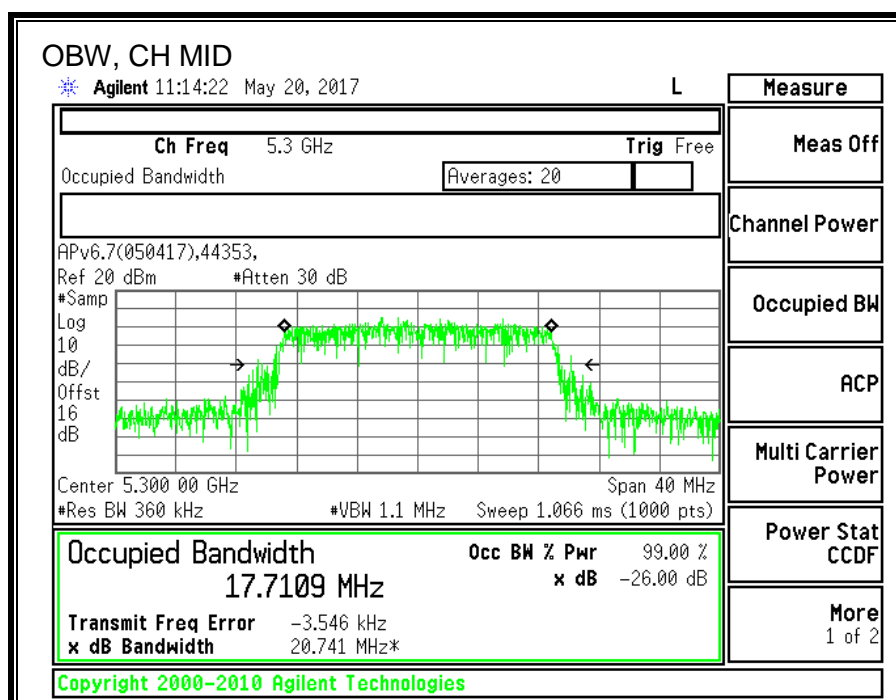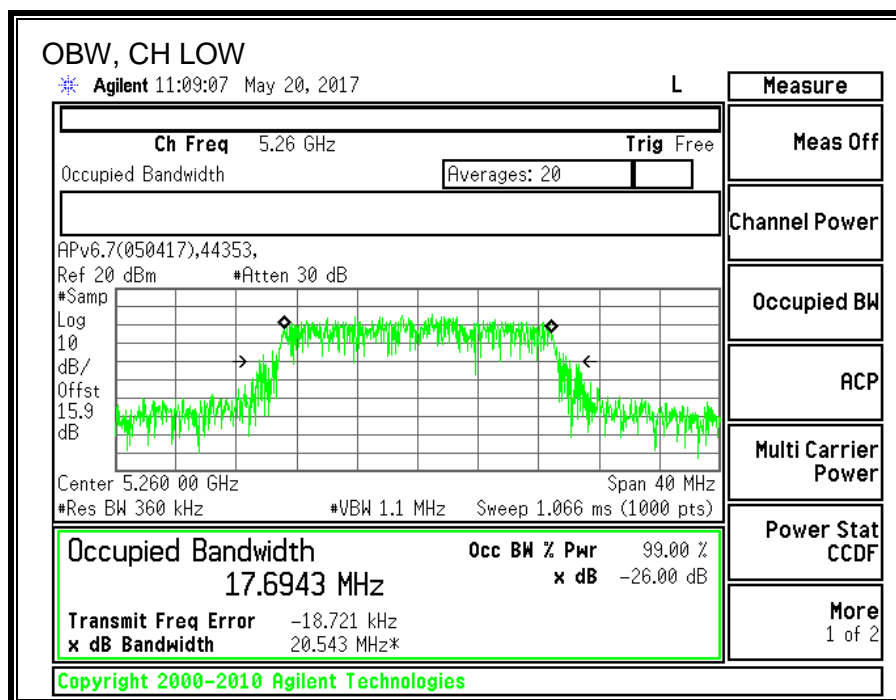

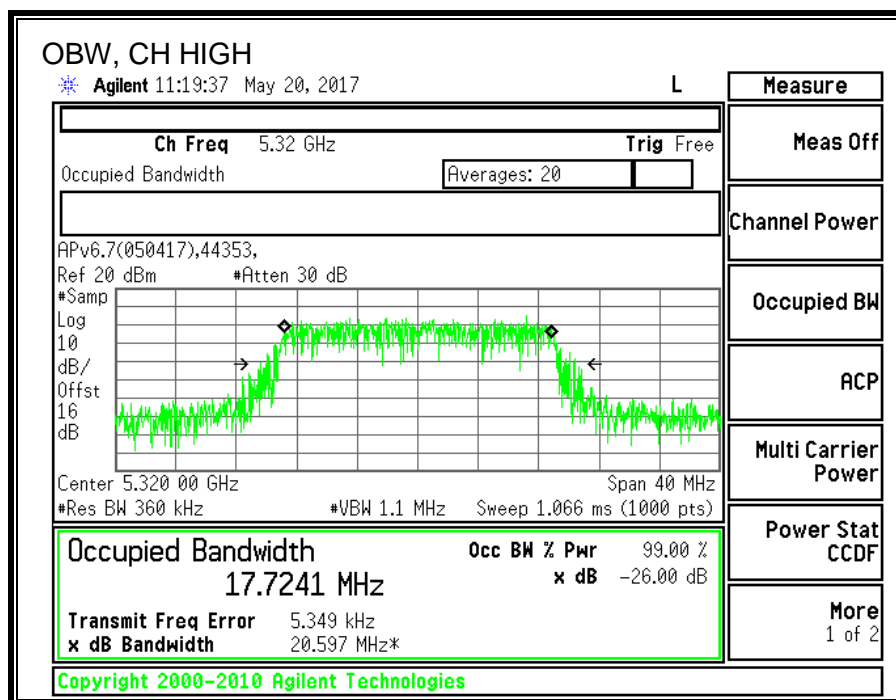

8.11.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power LAT 3 (dBm)
Low	5260	20.82
Mid	5300	20.91
High	5320	18.90

8.11.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	22.000	17.694	-7.90	23.48	11.00
Mid	5300	21.950	17.711	-7.90	23.48	11.00
High	5320	22.000	17.724	-7.90	23.49	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	20.82	20.82	23.48	-2.66
Mid	5300	20.91	20.91	23.48	-2.57
High	5320	18.90	18.90	23.49	-4.59

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	10.798	10.798	11.00	-0.20
Mid	5300	10.739	10.739	11.00	-0.26
High	5320	9.902	9.902	11.00	-1.10

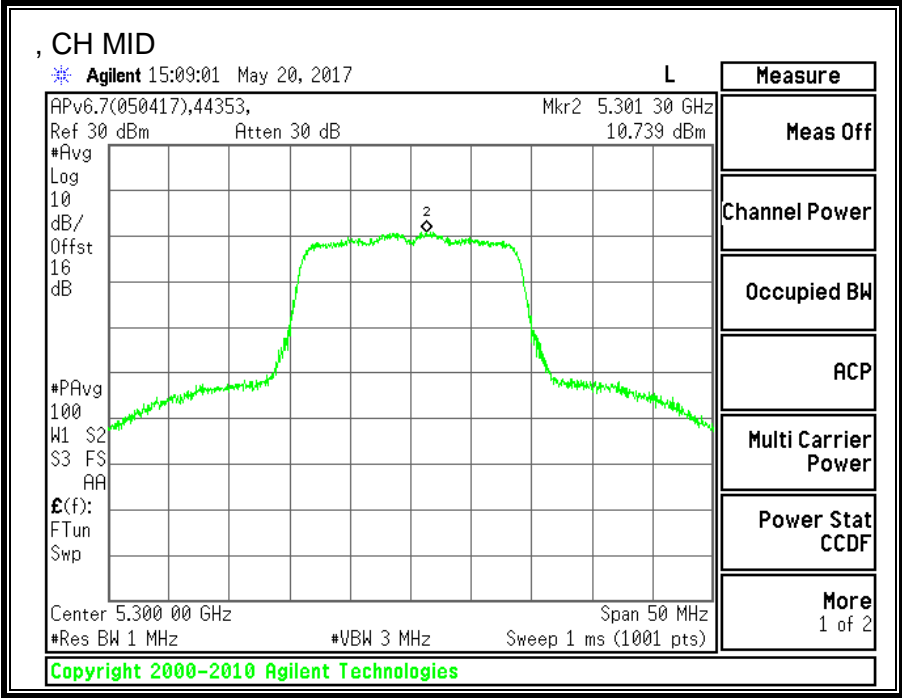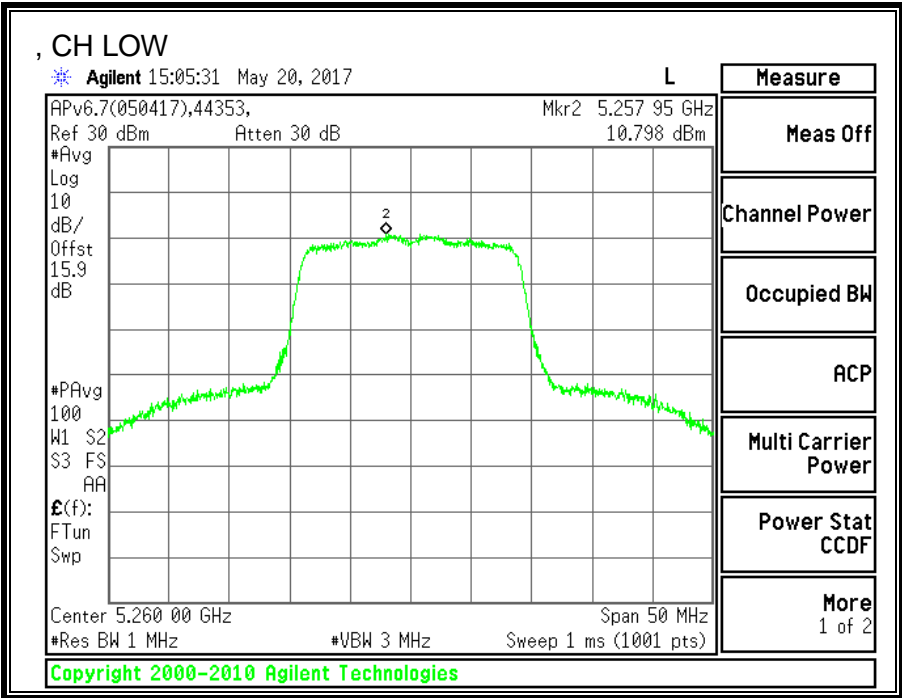

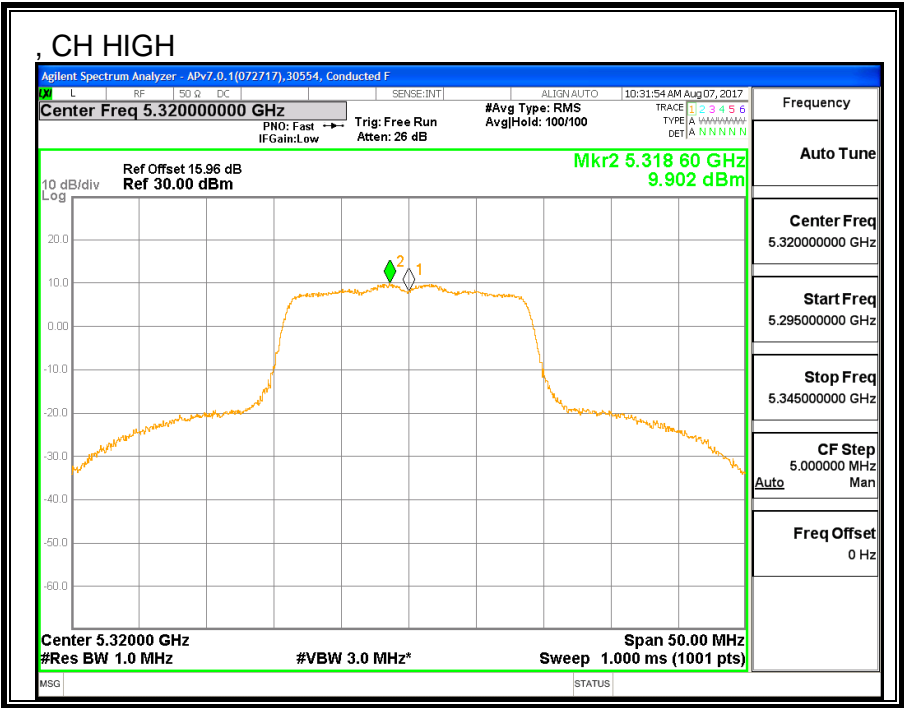

8.12. 11n HT20 2TX CDD MIMO MODE IN THE 5.3GHz BAND



8.12.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)	26 dB BW LAT 3 (MHz)
Low	5260	21.85	21.70
Mid	5300	21.95	21.65
High	5320	21.90	21.65

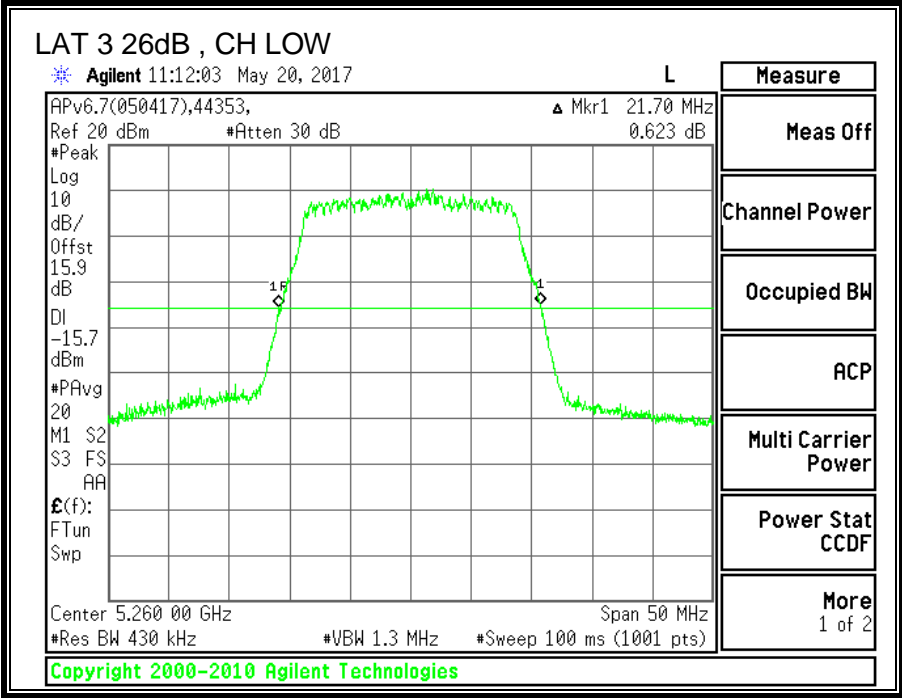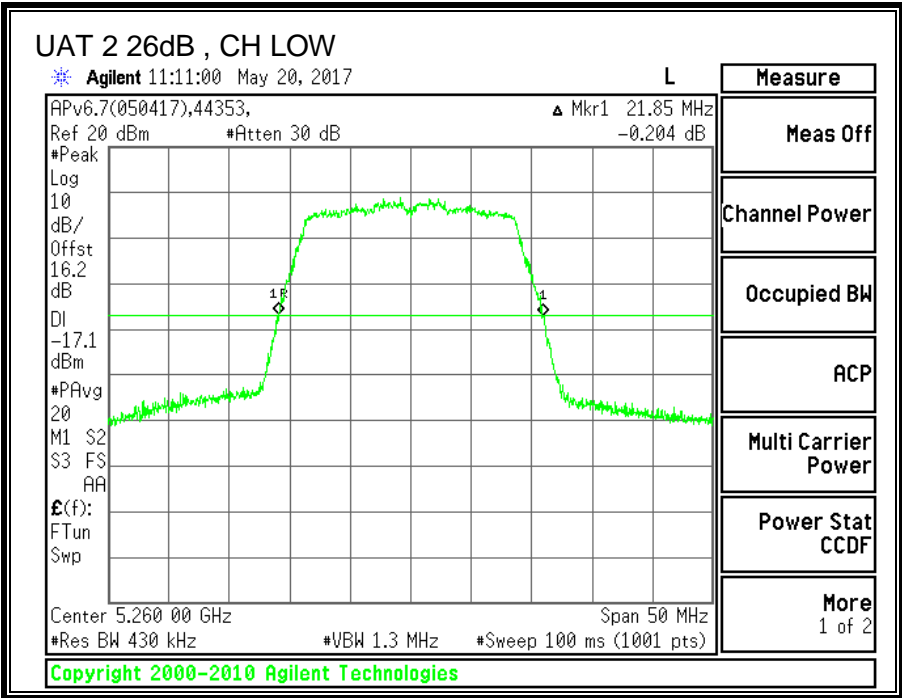

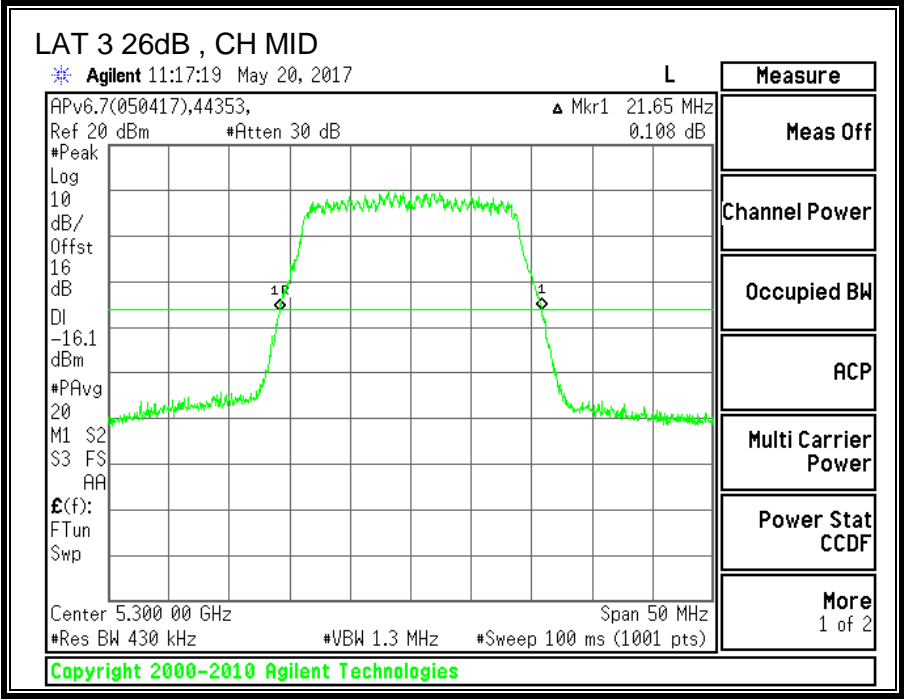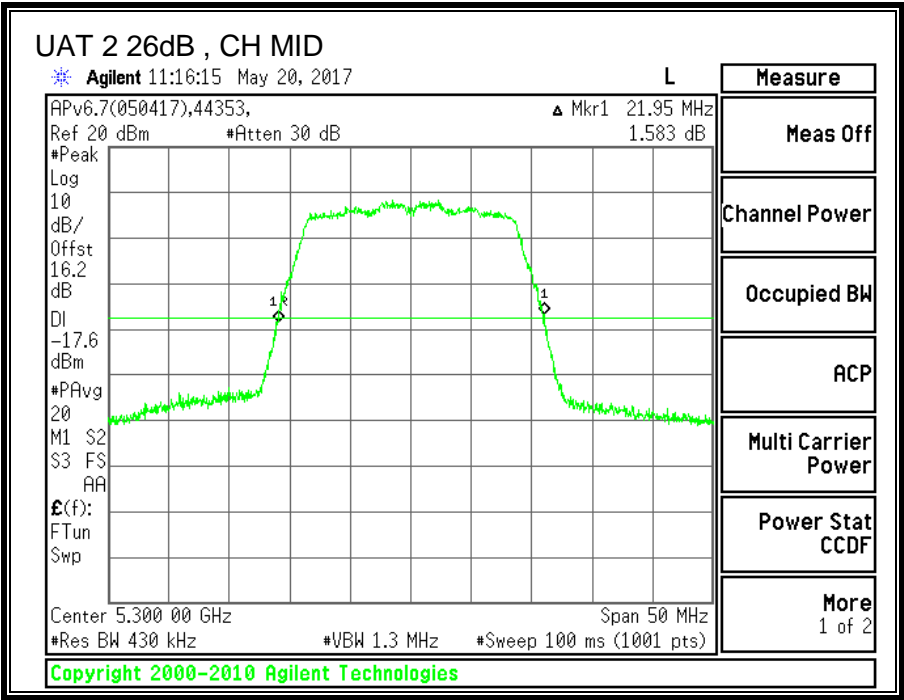

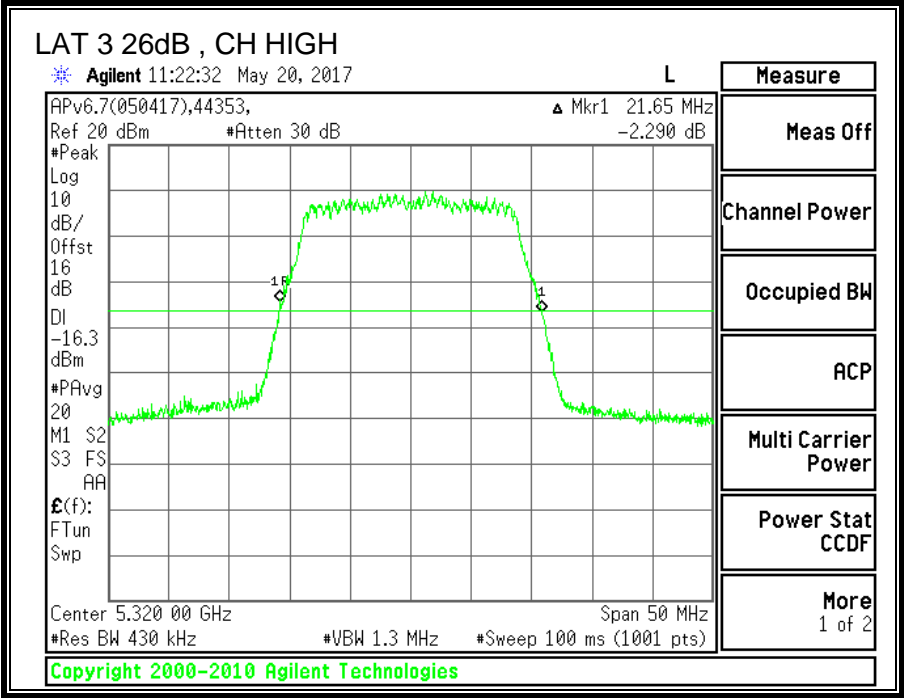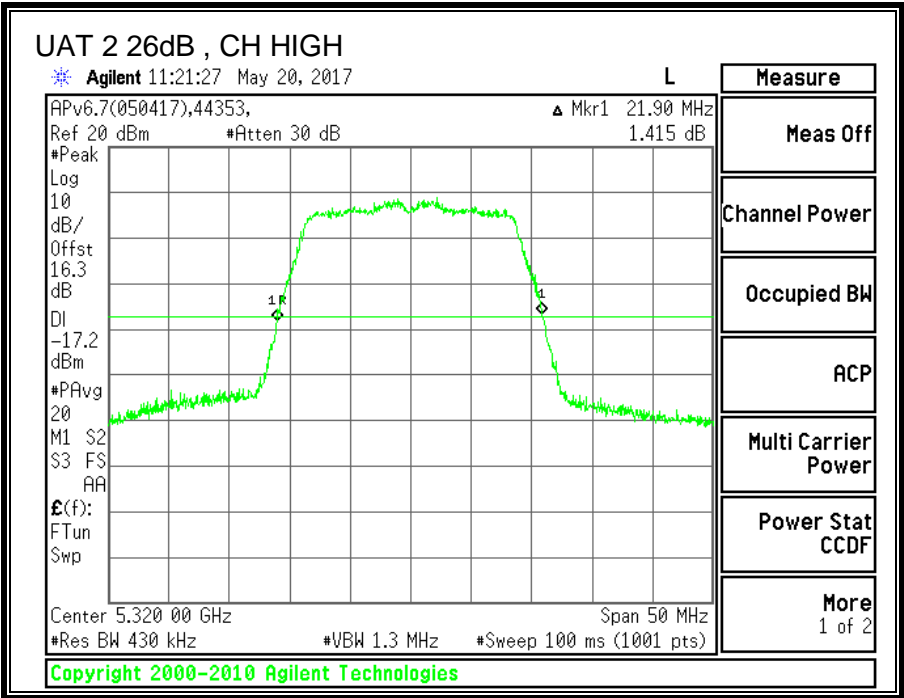



8.12.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)	99% BW LAT 3 (MHz)
Low	5260	17.6802	17.6569
Mid	5300	17.7021	17.6589
High	5320	17.6502	17.7015

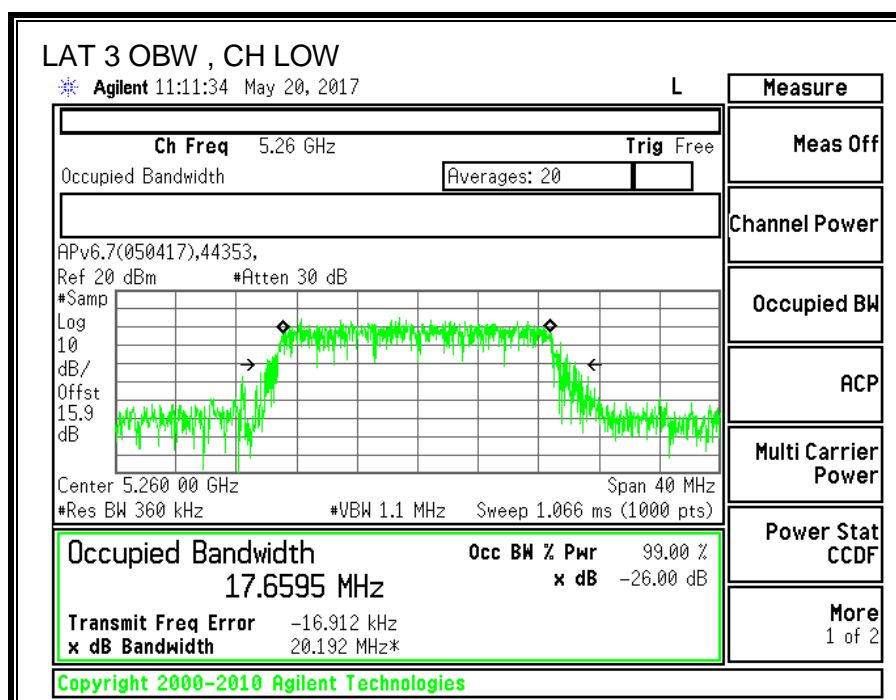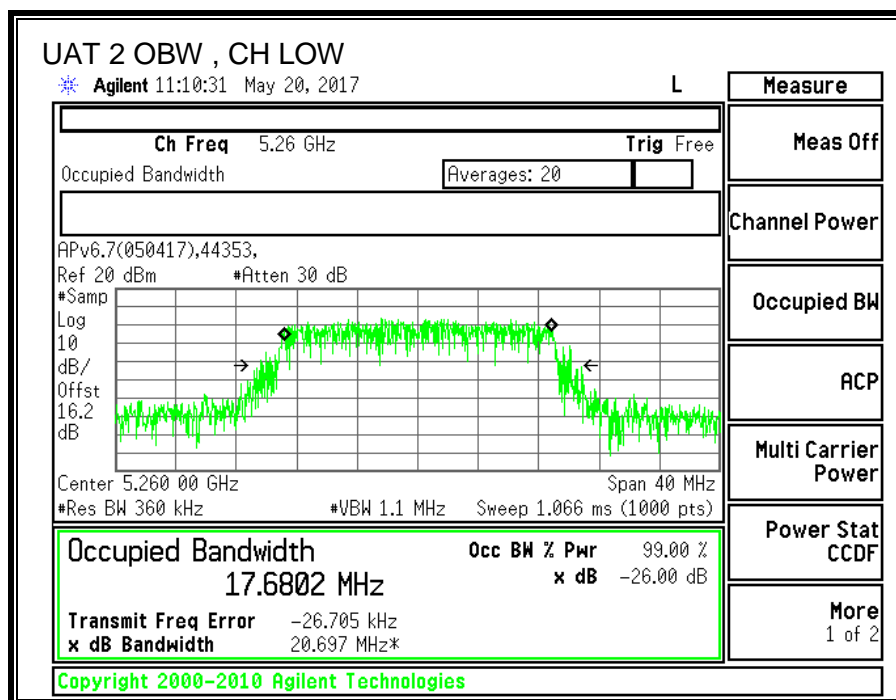

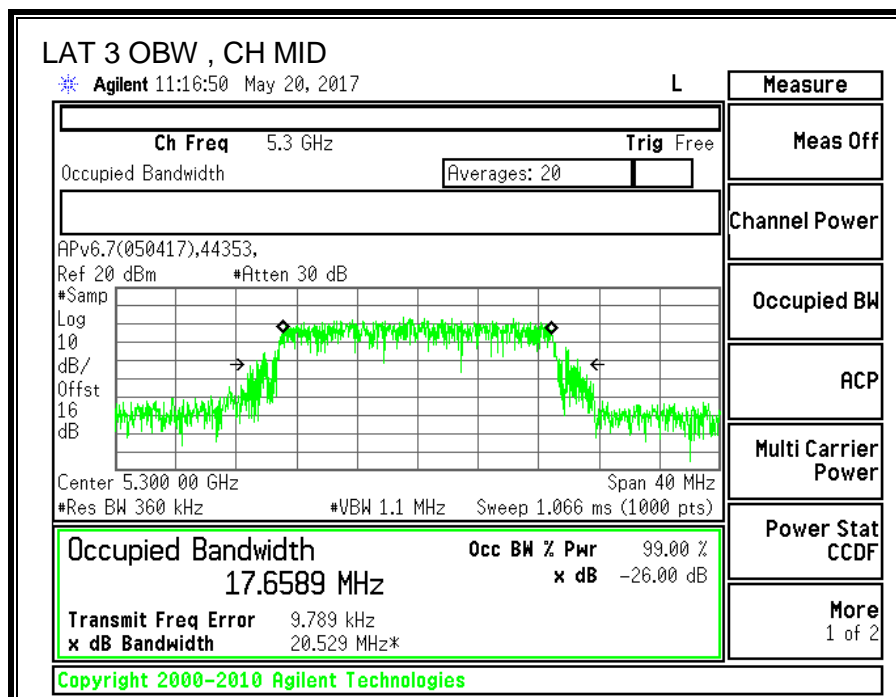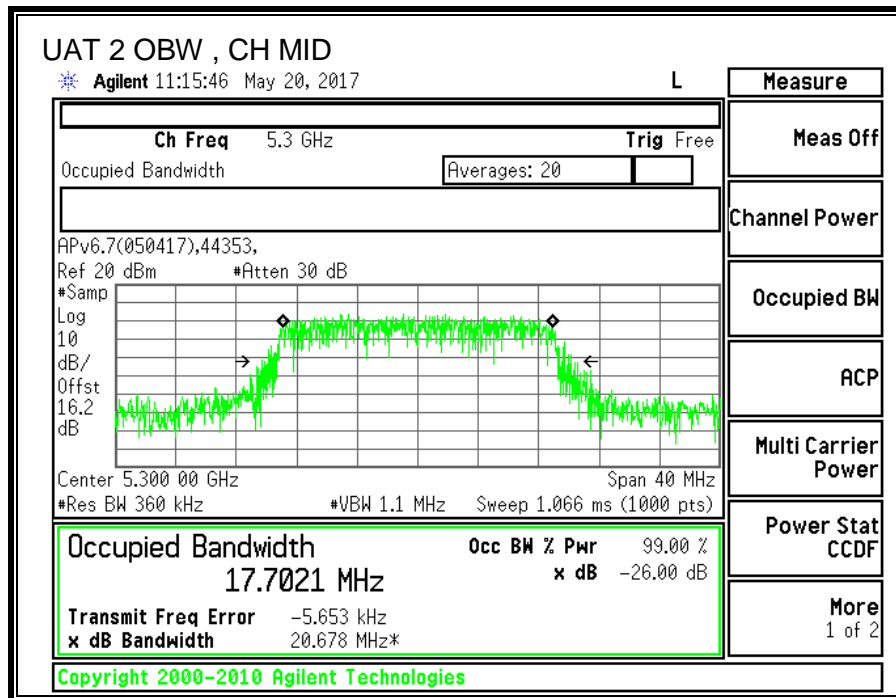

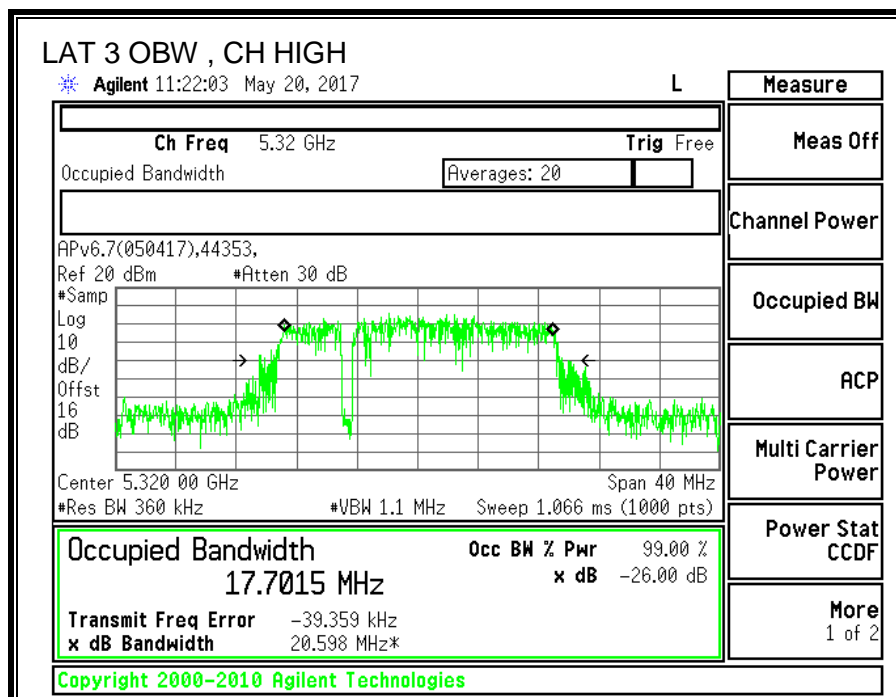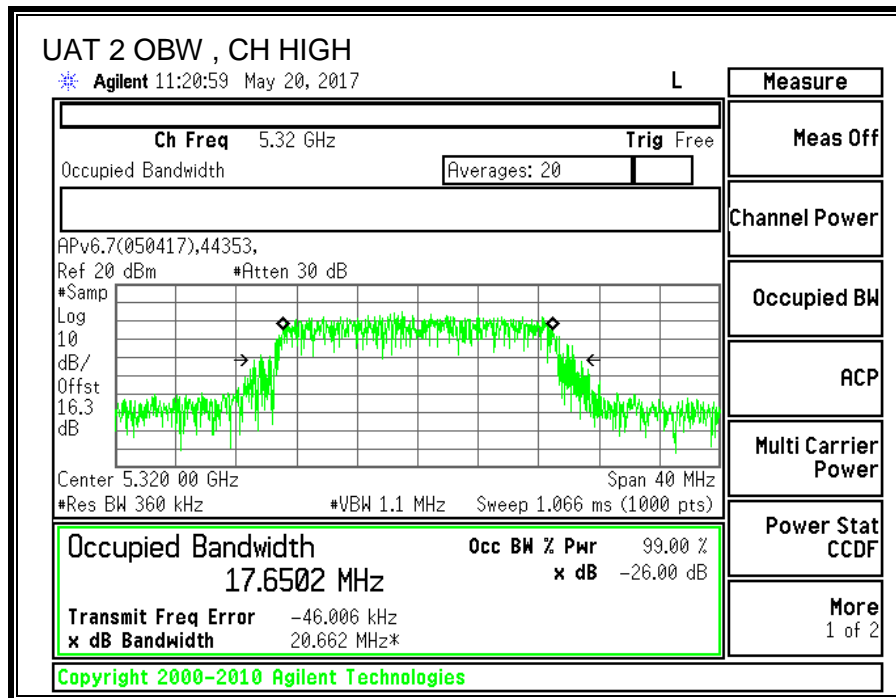

8.12.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Average Power Results

Channel	Frequency (MHz)	UAT 2 Power (dBm)	LAT 3 Power (dBm)	Total Power (dBm)
Low	5260	17.93	17.86	20.91
Mid	5300	17.98	17.90	20.95
High	5320	17.88	17.79	20.85

8.12.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

For Power used uncorrelated gain: The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-2.88	-7.90	-4.70

For PSD used correlated gain: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-2.88	-7.90	-2.02

RESULTS

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.70	17.660	-4.70	-2.02	23.47	11.00
Mid	5300	21.65	17.659	-4.70	-2.02	23.47	11.00
High	5320	21.65	17.65	-4.70	-2.02	23.47	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results



Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	17.93	17.86	20.91	23.47	-2.56
Mid	5300	17.98	17.90	20.95	23.47	-2.52
High	5320	17.88	17.79	20.85	23.47	-2.62

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	7.69	7.44	10.58	11.00	-0.42
Mid	5300	7.53	7.64	10.59	11.00	-0.41
High	5320	7.25	7.77	10.53	11.00	-0.47

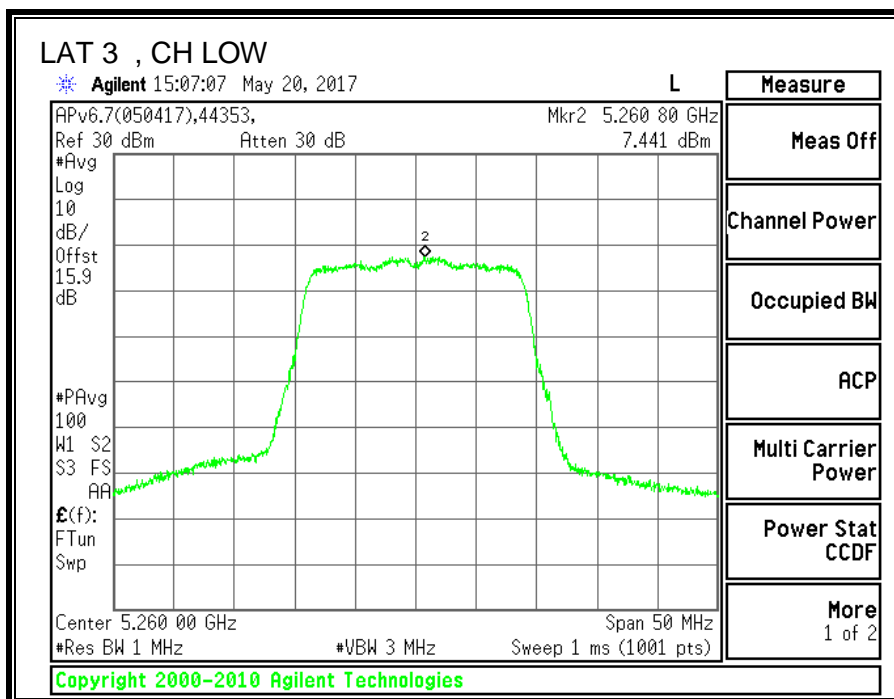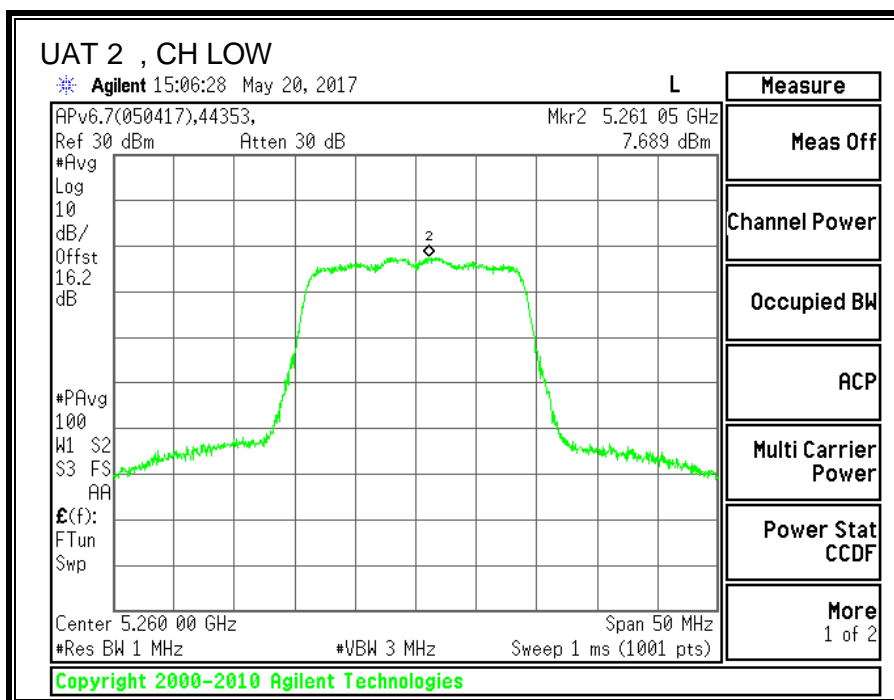

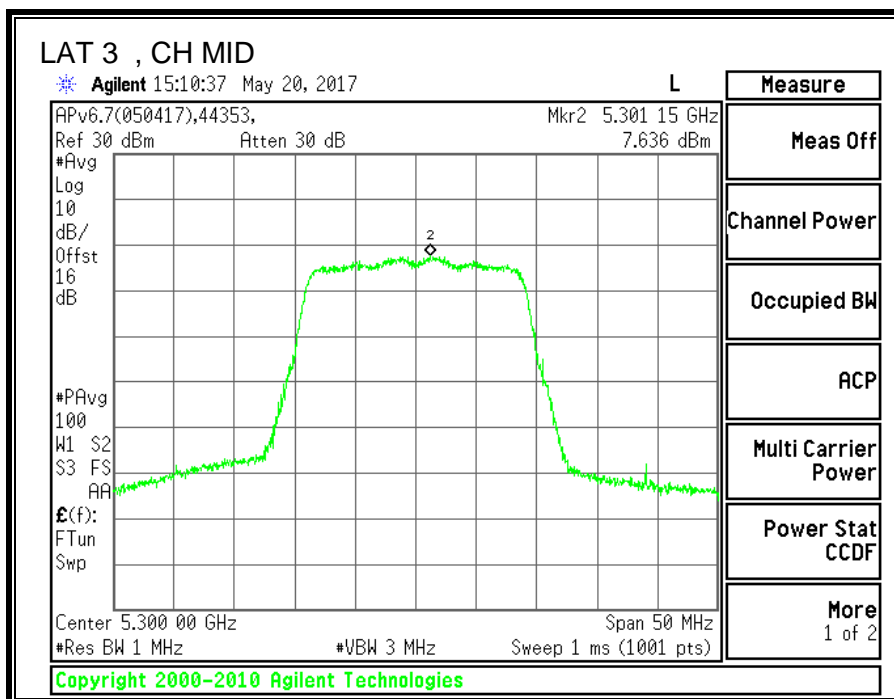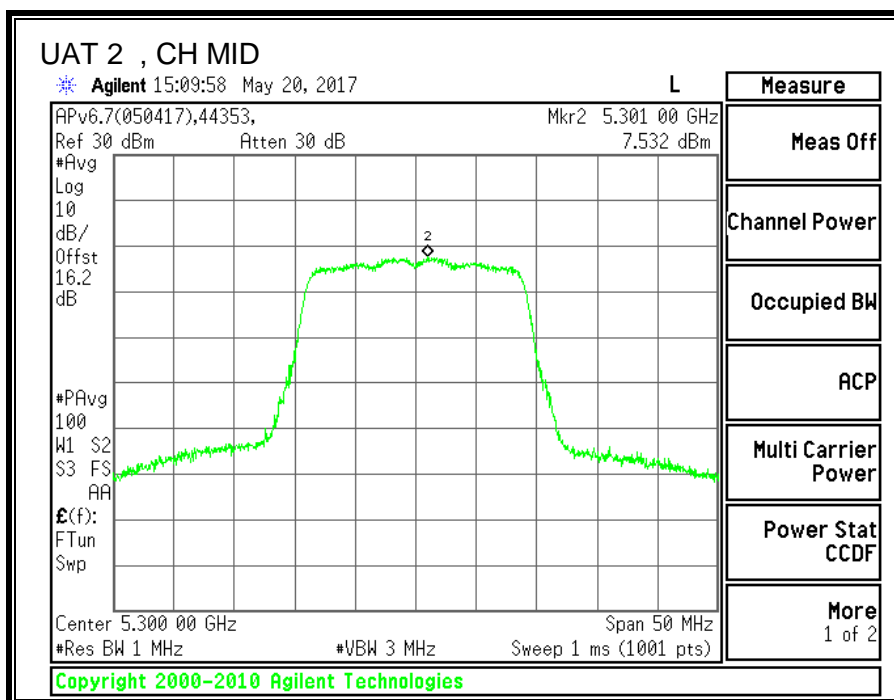

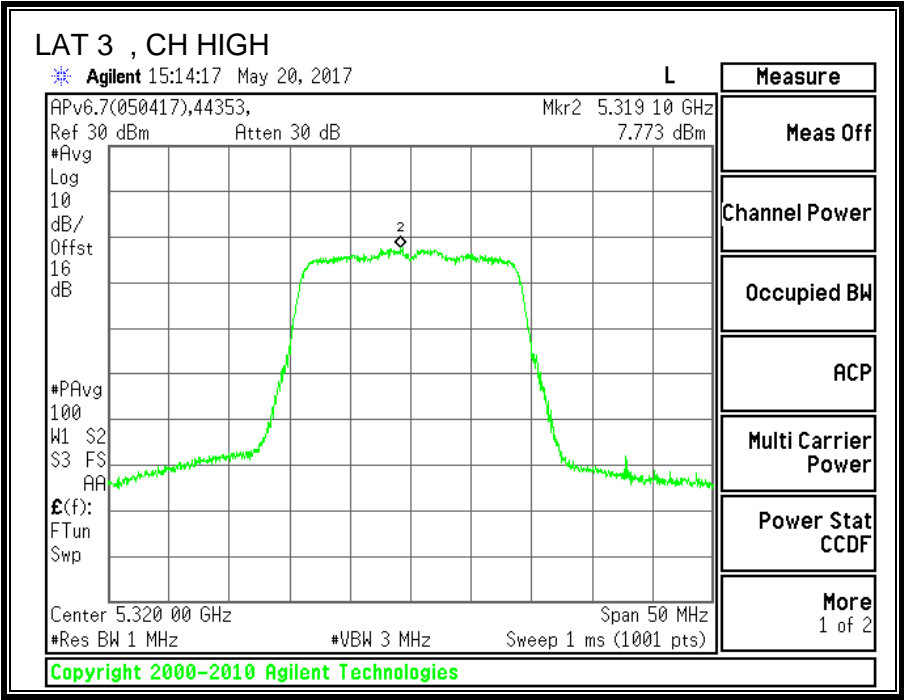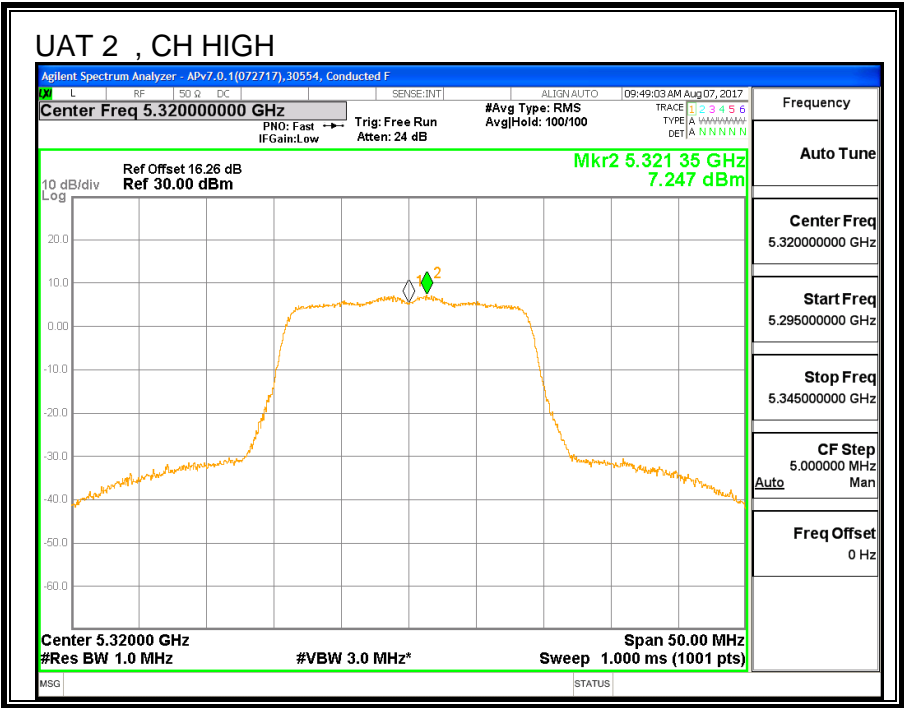

8.13. 11n HT40 UAT 2 SISO MODE IN THE 5.3GHz BAND



8.13.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)
Low	5270	40.6
High	5310	40.7

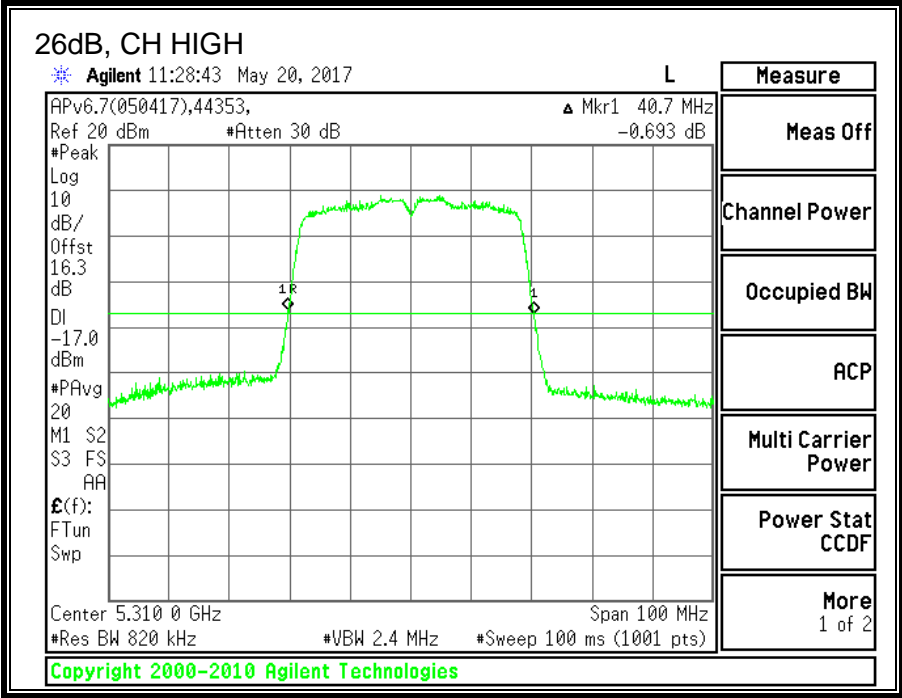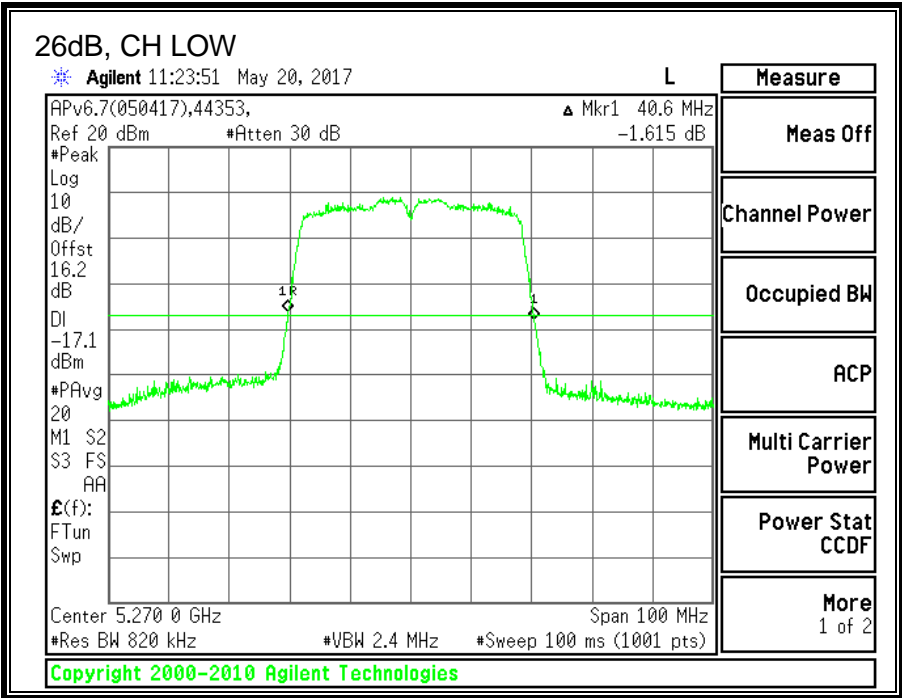



8.13.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)
Low	5270	36.0925
High	5310	36.1653

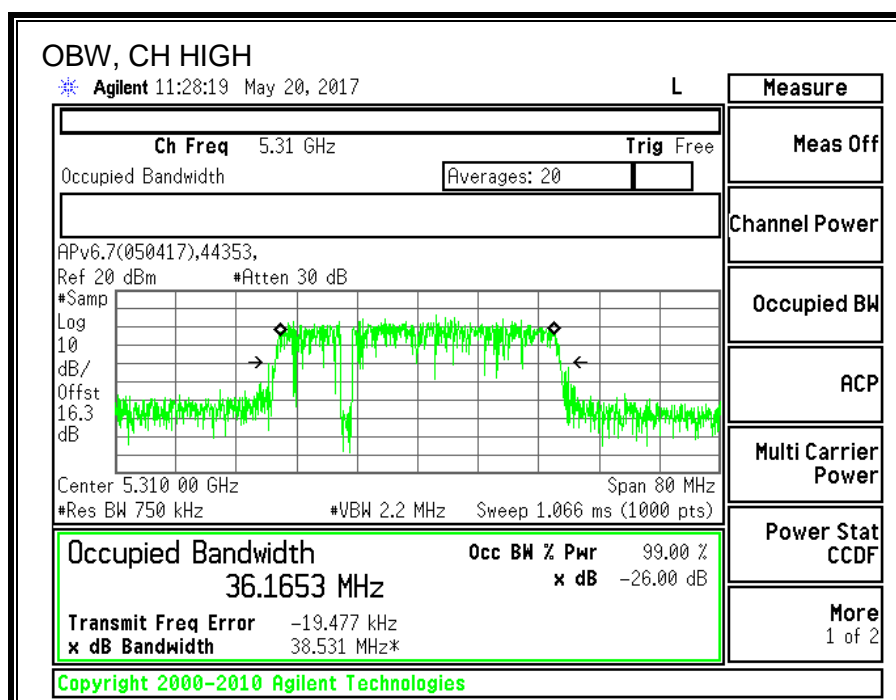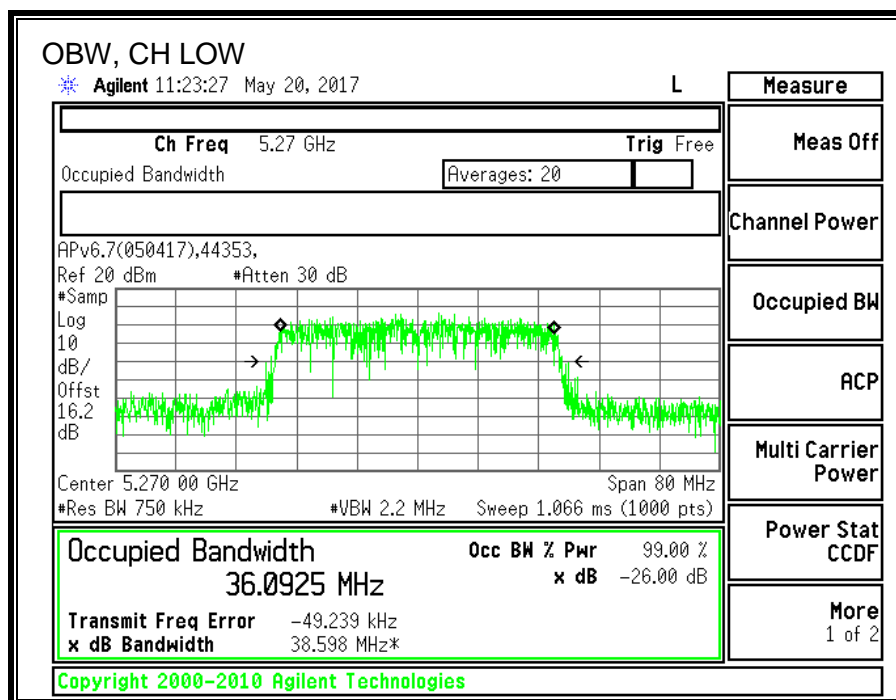

8.13.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power UAT 2 (dBm)
Low	5270	19.45
High	5310	17.96

8.13.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.60	36.09	-2.80	24.00	11.00
High	5310	40.70	36.17	-2.80	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	19.45	19.45	24.00	-4.55
High	5310	17.96	17.96	24.00	-6.04

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	8.328	8.428	11.00	-2.57
High	5310	8.322	8.422	11.00	-2.58

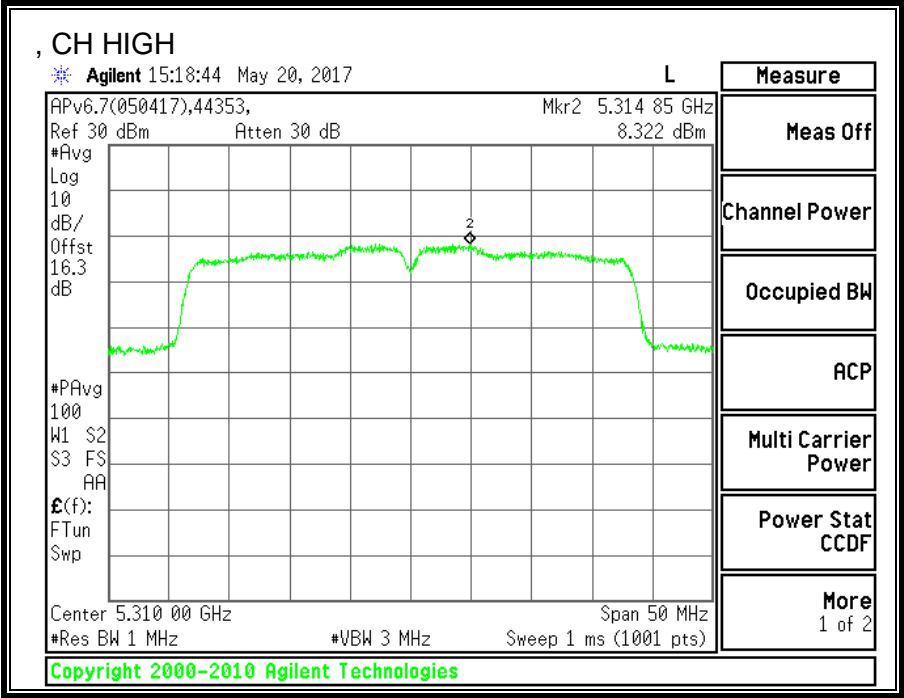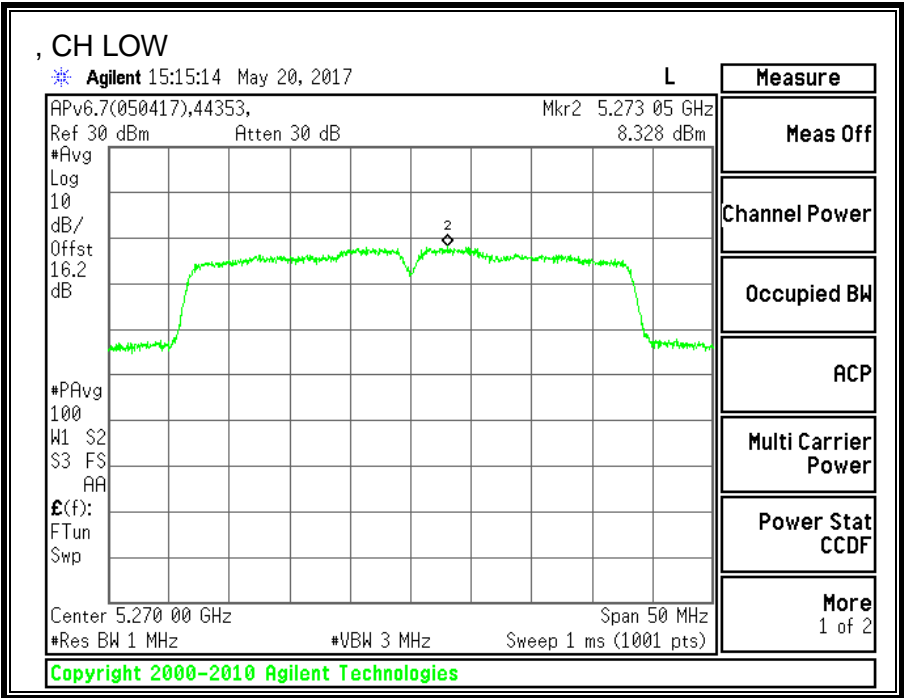

8.14. 11n HT40 LAT 3 SISO MODE IN THE 5.3GHz BAND



8.14.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Low	5270	40.5
High	5310	40.7

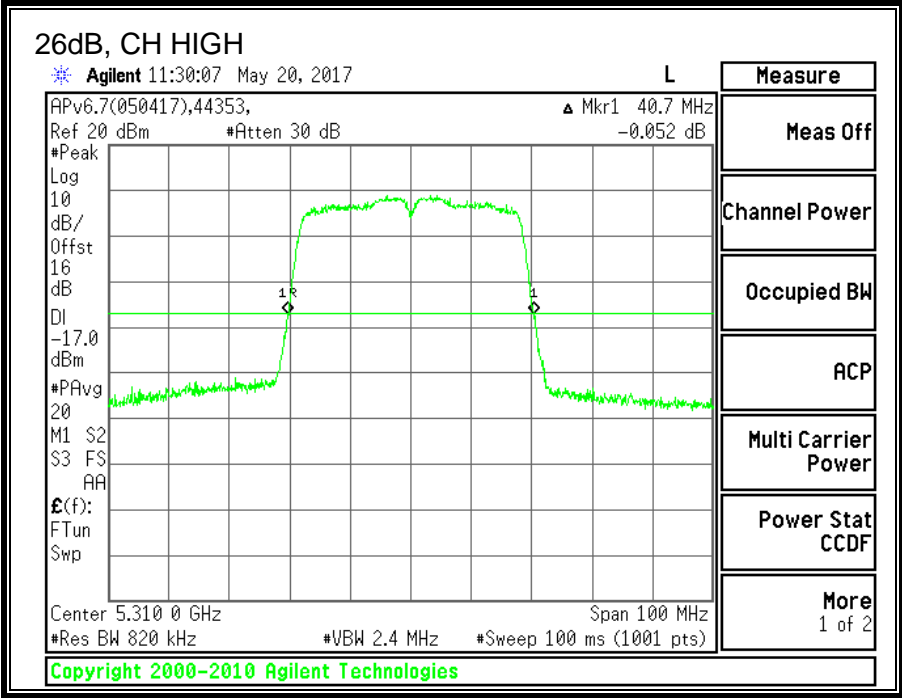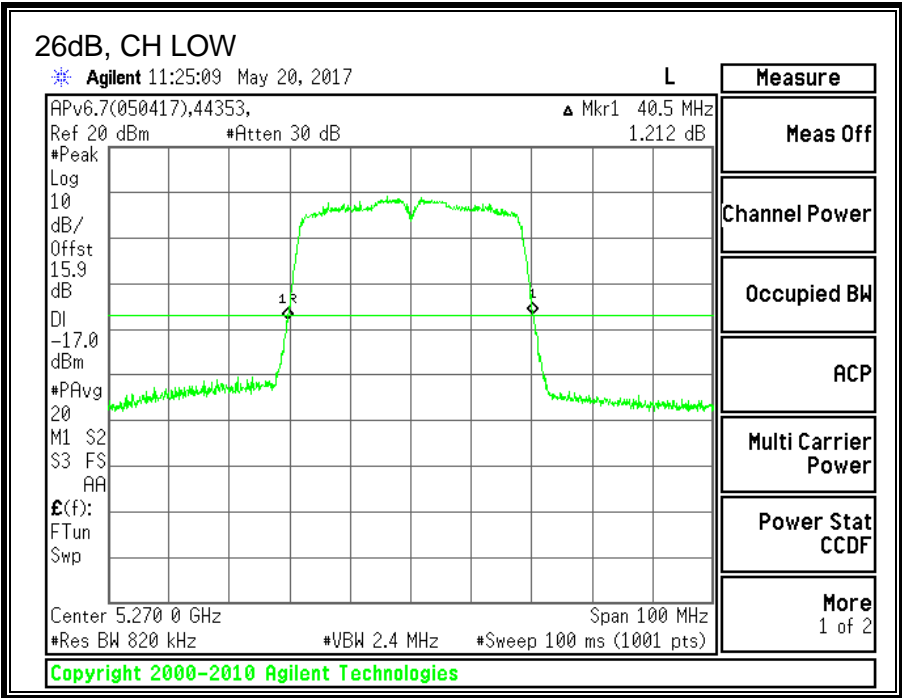



8.14.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW LAT 3 (MHz)
Low	5270	36.1170
High	5310	36.1669

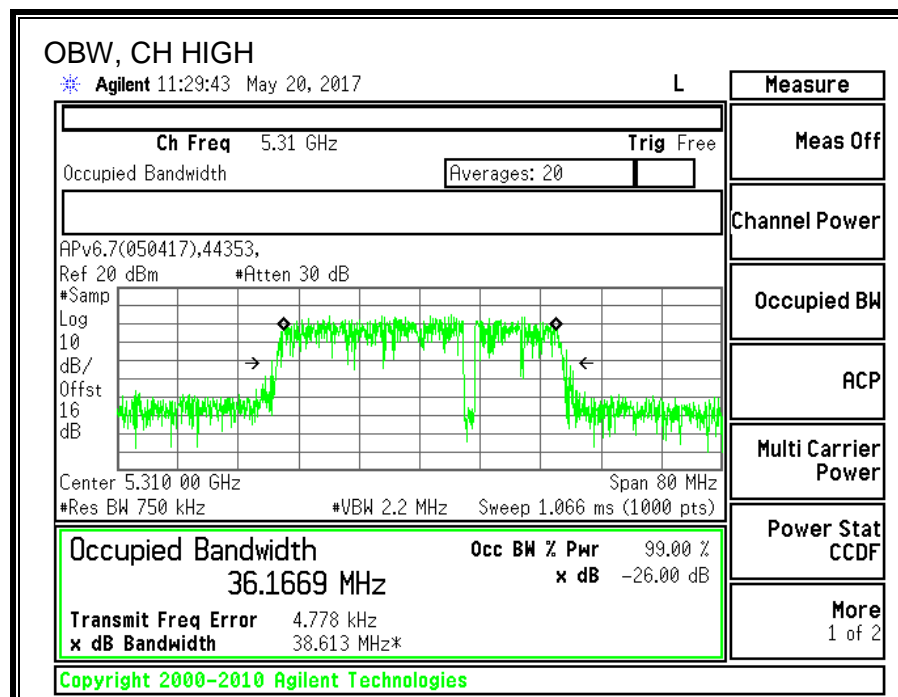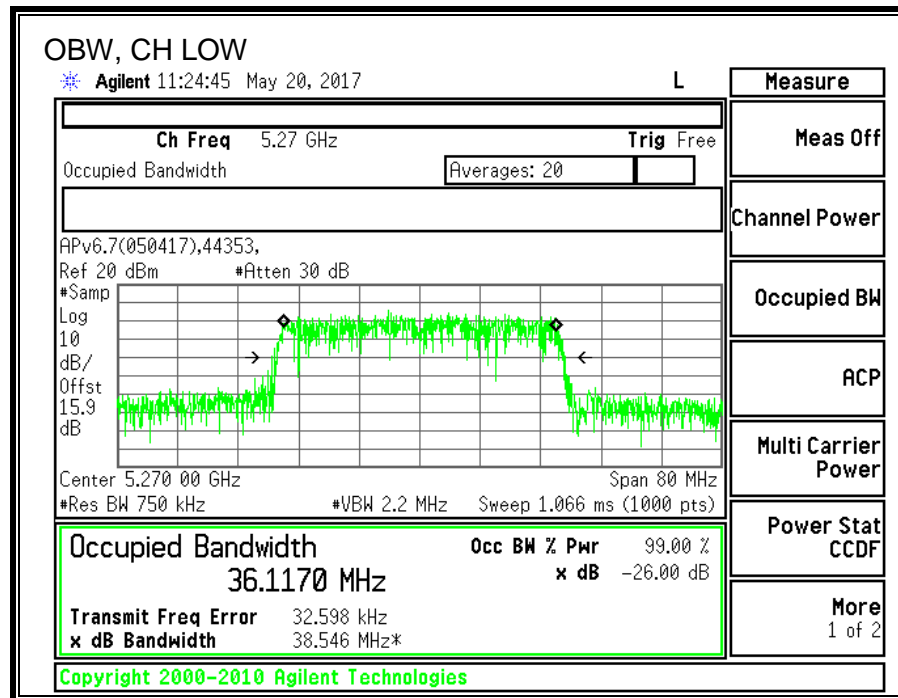

8.14.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power LAT 3 (dBm)
Low	5270	19.42
High	5310	17.88

8.14.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.50	36.12	-7.90	24.00	11.00
High	5310	40.70	36.17	-7.90	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	19.42	19.42	24.00	-4.58
High	5310	17.88	17.88	24.00	-6.12

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	8.060	8.160	11.00	-2.84
High	5310	8.413	8.513	11.00	-2.49

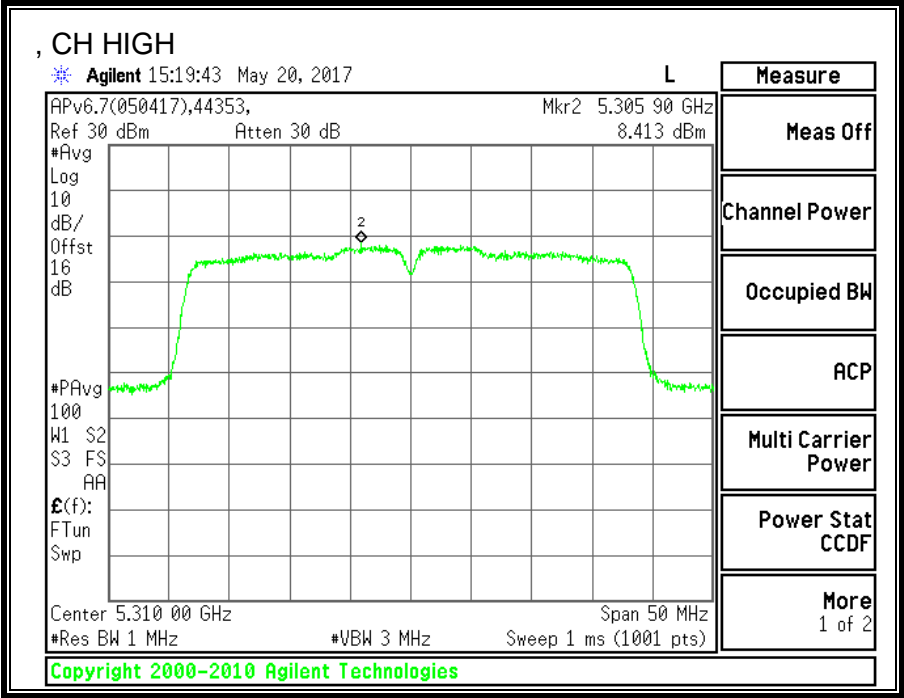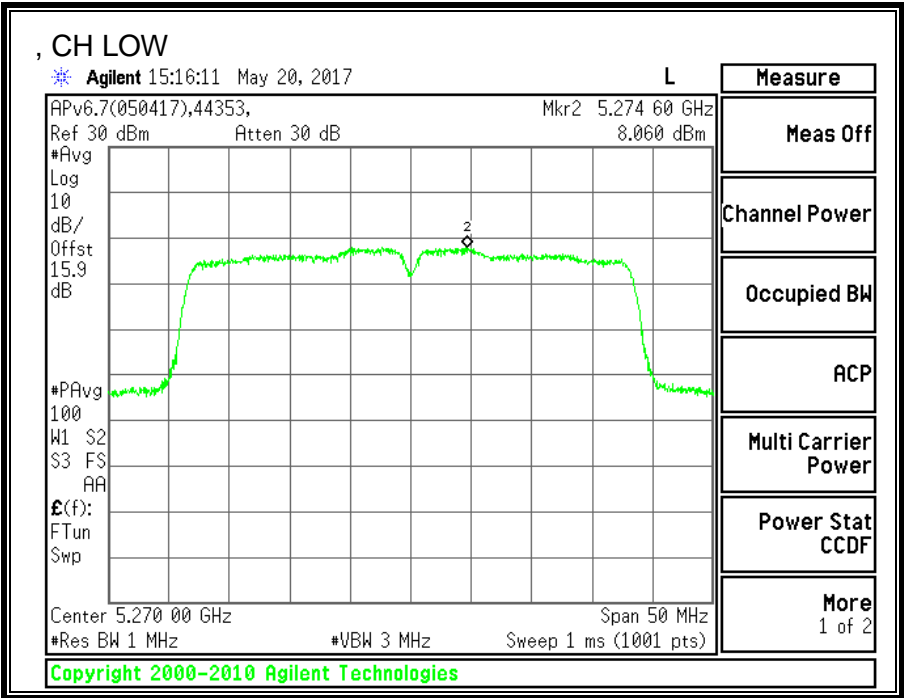

8.15. 11n HT40 2TX CDD MIMO MODE IN THE 5.3GHz BAND



8.15.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)	26 dB BW LAT 3 (MHz)
Low	5270	40.6	40.1
High	5310	40.6	40.2

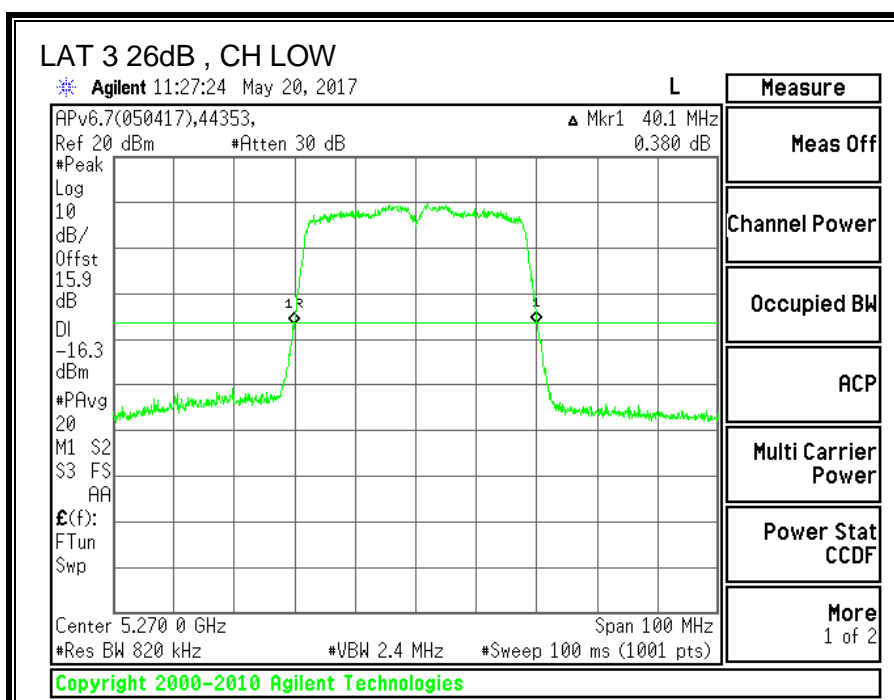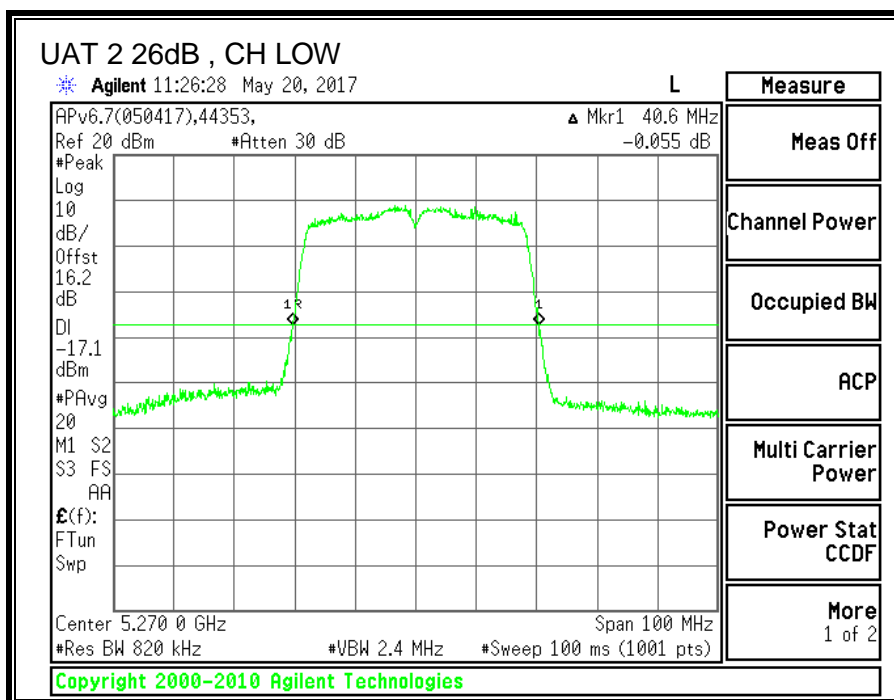

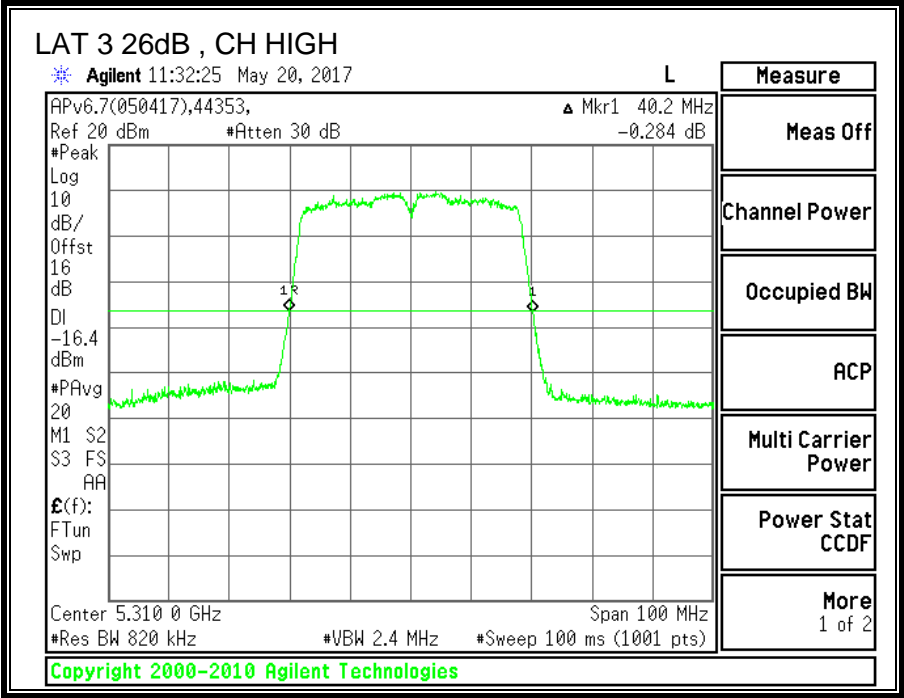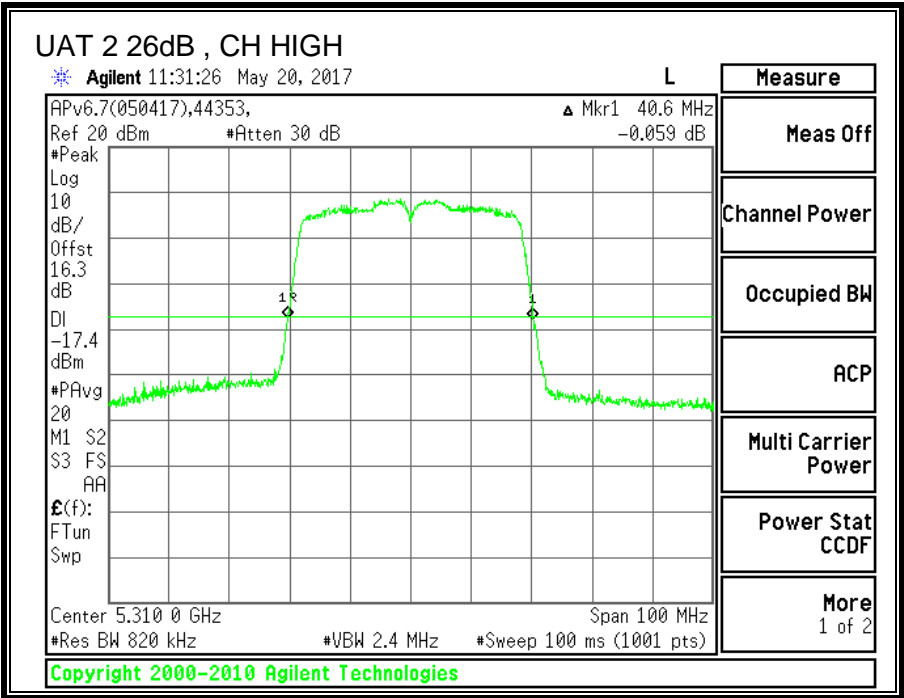



8.15.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)	99% BW LAT 3 (MHz)
Low	5270	36.1825	36.0667
High	5310	36.2121	36.0426

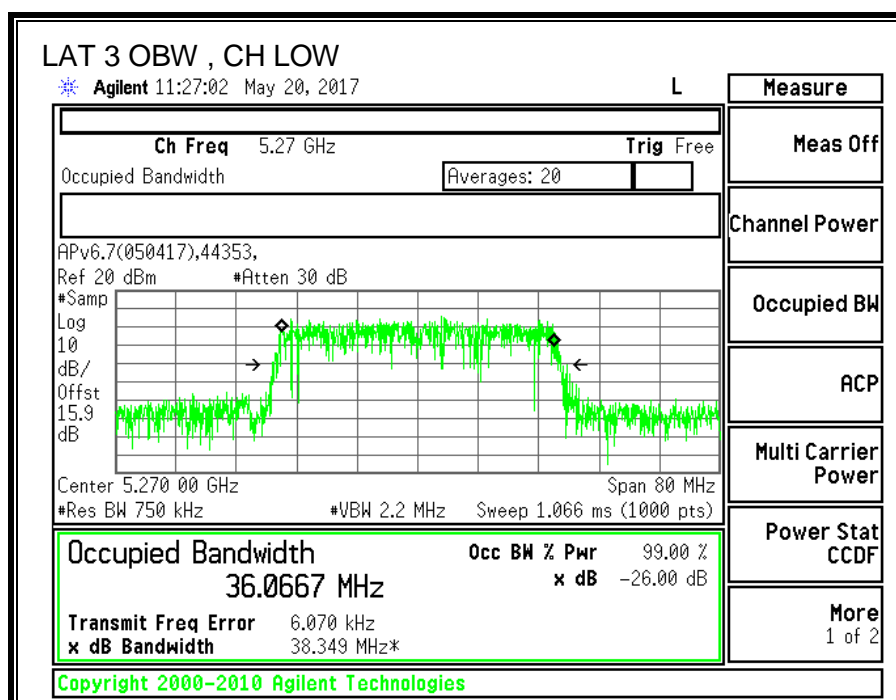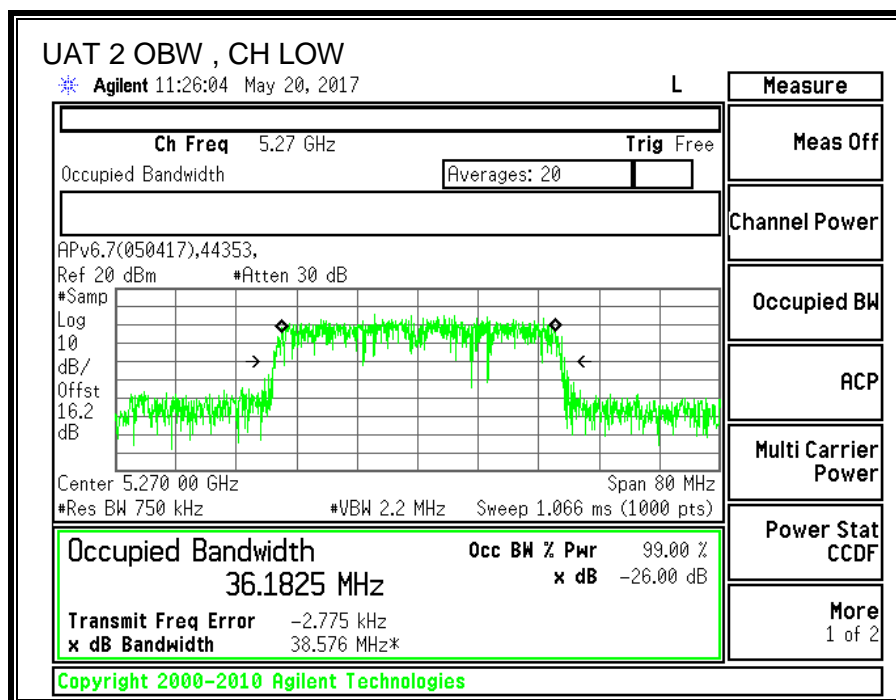

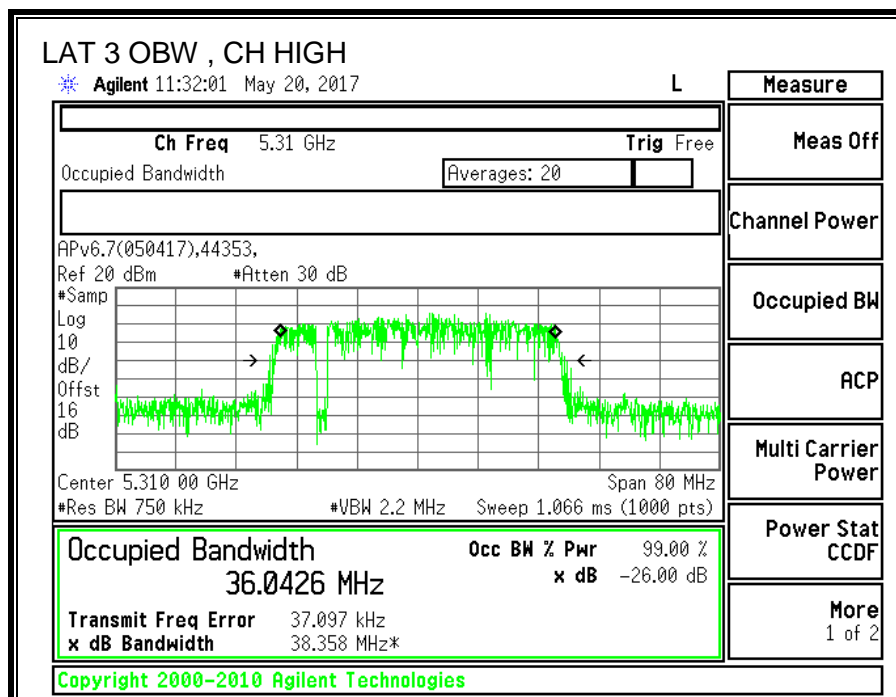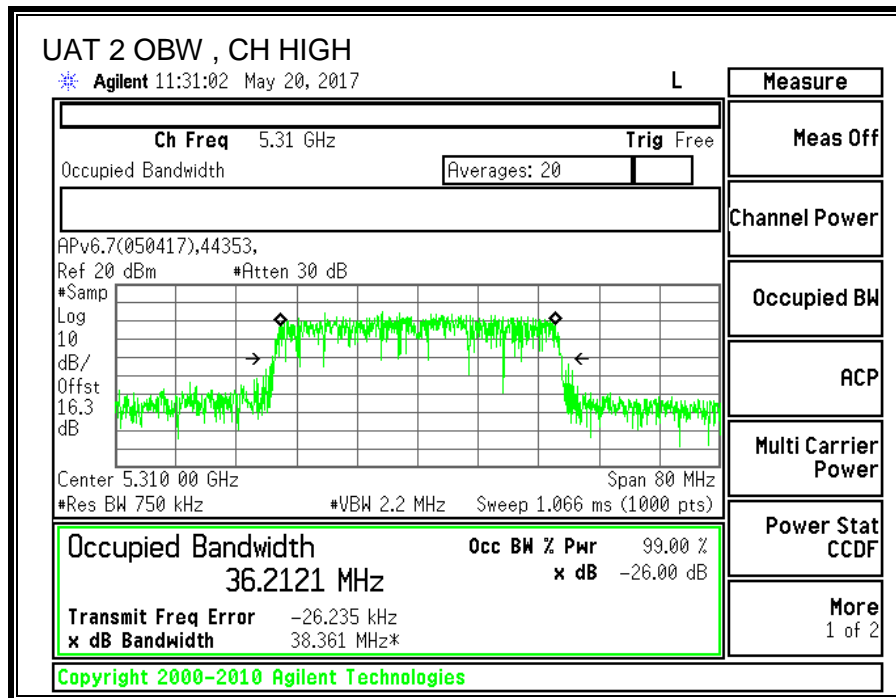

8.15.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Average Power Results

Channel	Frequency (MHz)	UAT 2 Power (dBm)	LAT 3 Power (dBm)	Total Power (dBm)
Low	5270	19.37	19.42	22.41
High	5310	16.94	16.86	19.91

8.15.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

For Power used uncorrelated gain: The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-2.88	-7.90	-4.70

For PSD used correlated gain: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-2.88	-7.90	-2.02

RESULTS

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.100	36.067	-4.70	-2.02	24.00	11.00
High	5310	40.200	36.043	-4.70	-2.02	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	19.37	19.42	22.41	24.00	-1.59
High	5310	16.94	16.86	19.91	24.00	-4.09

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	7.004	6.668	9.95	11.00	-1.05
High	5310	6.406	6.388	9.51	11.00	-1.49

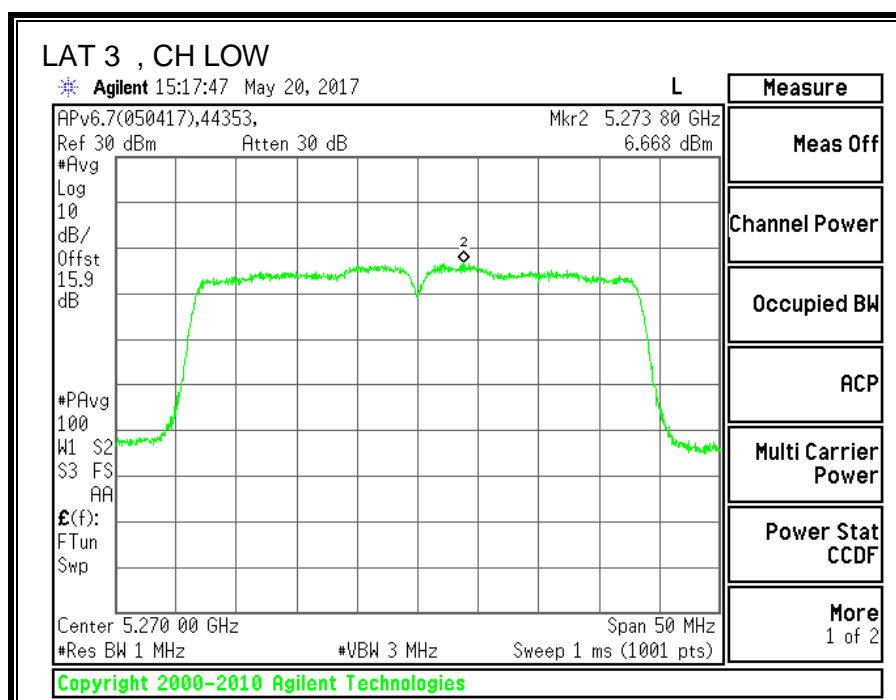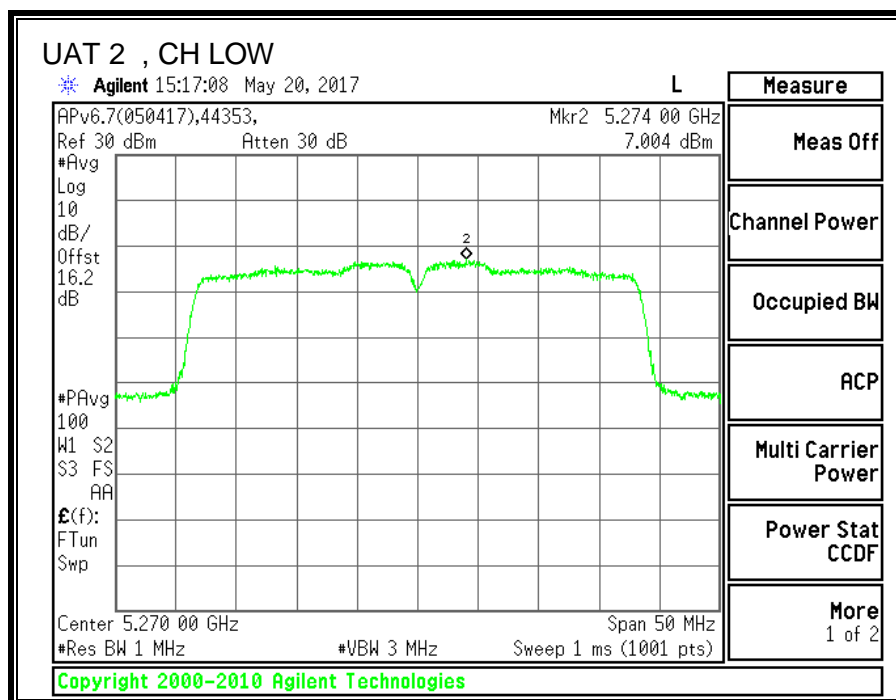

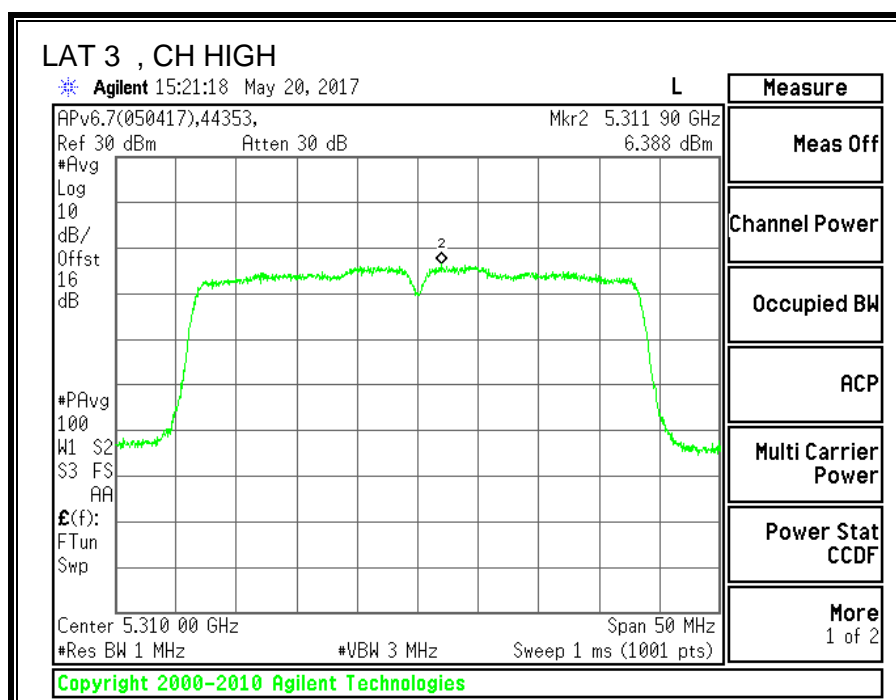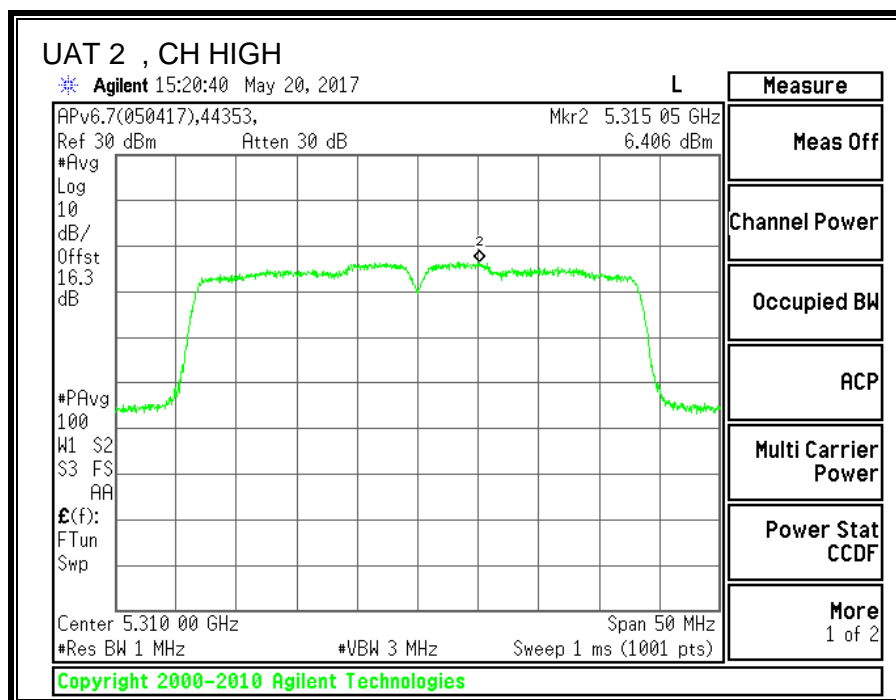

8.16. 11ac HT80 UAT 2 SISO MODE IN THE 5.3GHz BAND


8.16.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)
Mid	5290	82.4

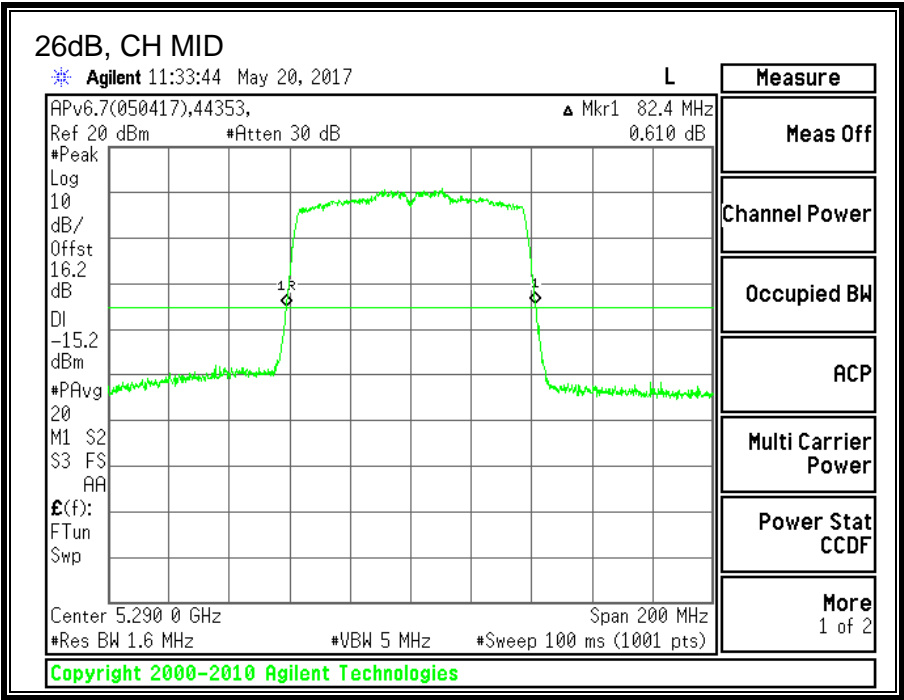


8.16.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)
Mid	5290	75.4880

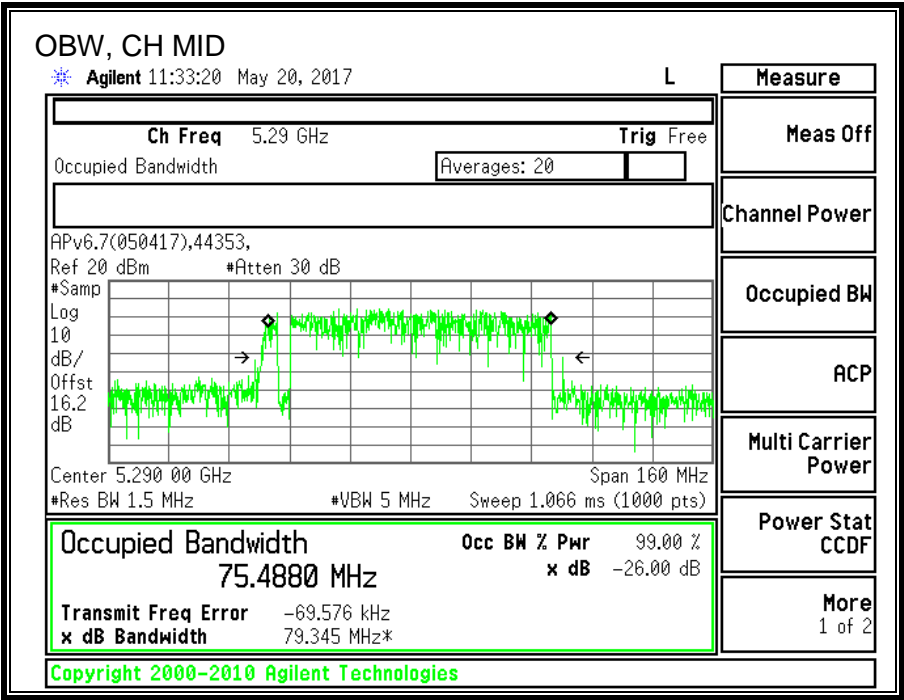

8.16.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power UAT 2 (dBm)
Mid	5290	17.32

8.16.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5290	82.40	75.49	-2.88	24.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	17.32	17.32	24.00	-6.68

PPSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5290	5.197	5.387	11.00	-5.61

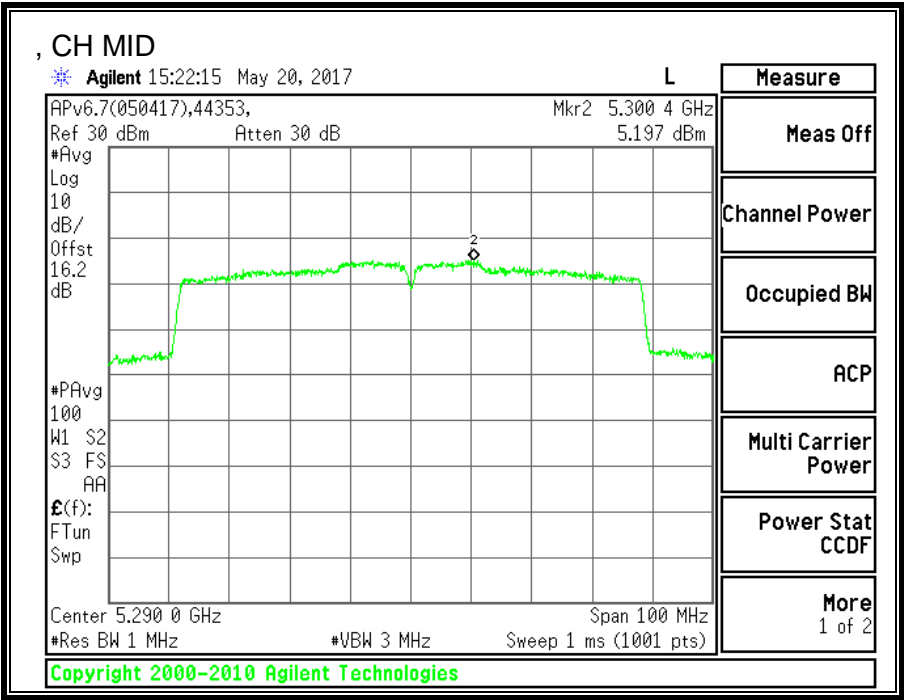

8.17. 11ac HT80 LAT 3 SISO MODE IN THE 5.3GHz BAND


8.17.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Mid	5290	82.6

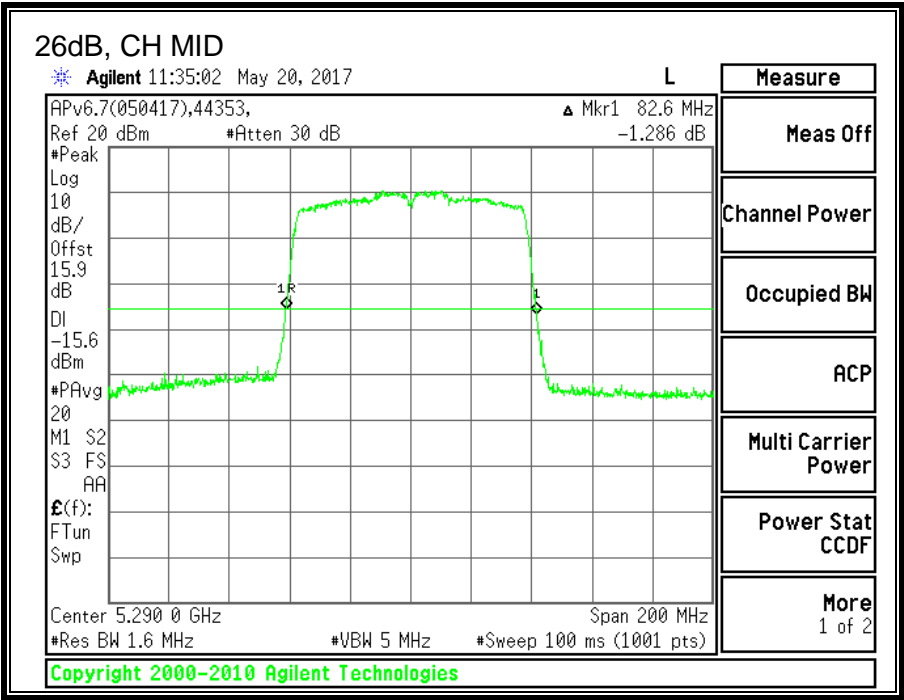


8.17.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW LAT 3 (MHz)
Mid	5290	75.3136

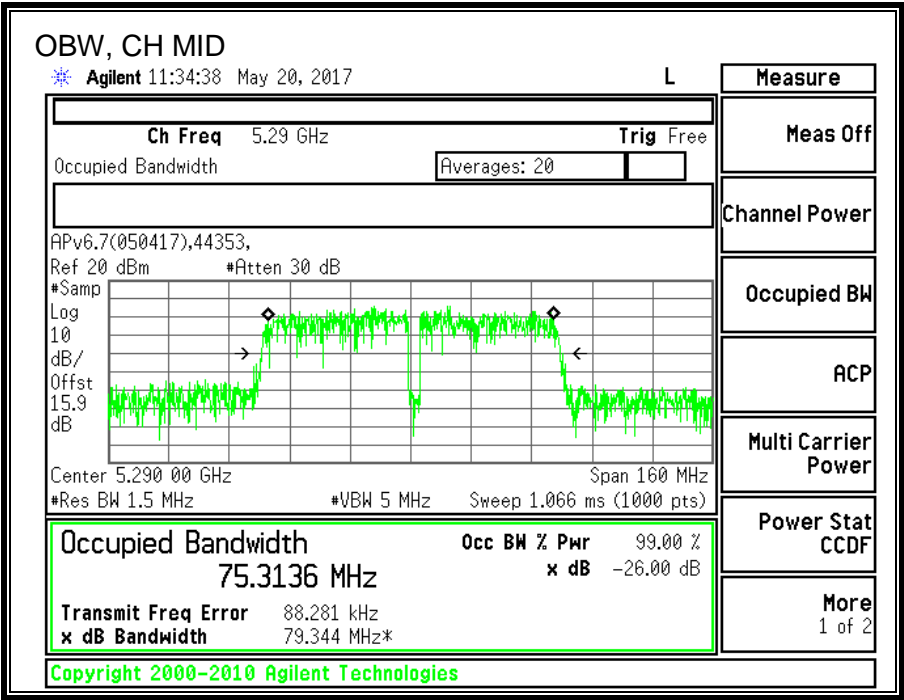

8.17.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power LAT 3 (dBm)
Mid	5290	17.39

8.17.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5290	82.60	75.31	-7.90	24.00	11.00


Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	17.39	17.39	24.00	-6.61

PPSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5290	5.06	5.25	11.00	-5.75

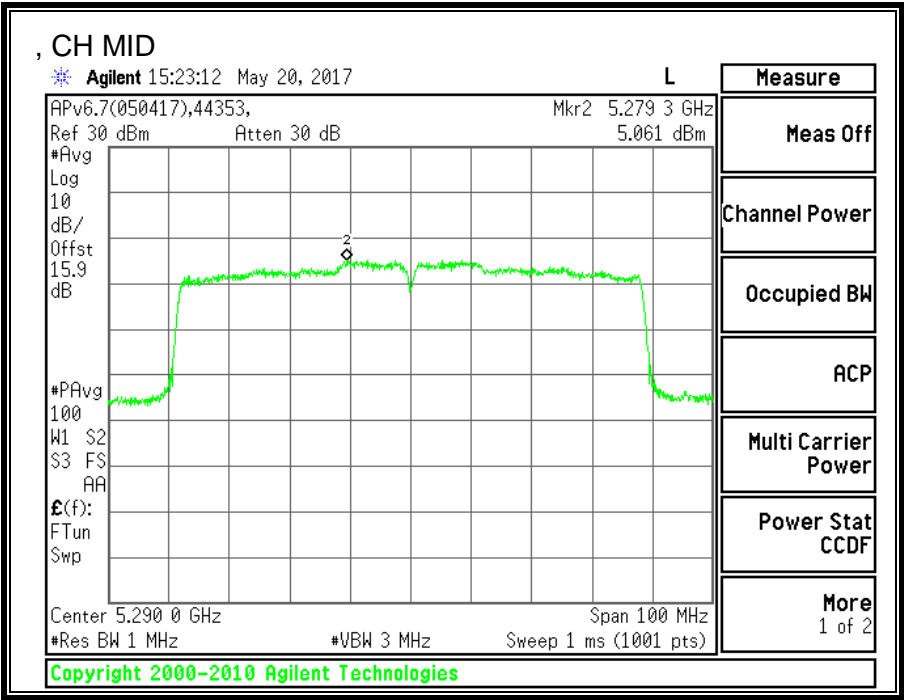

8.18. 11ac HT80 2TX CDD MIMO MODE IN THE 5.3GHz BAND



8.18.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)	26 dB BW LAT 3 (MHz)
Mid	5290	82.6	82.4

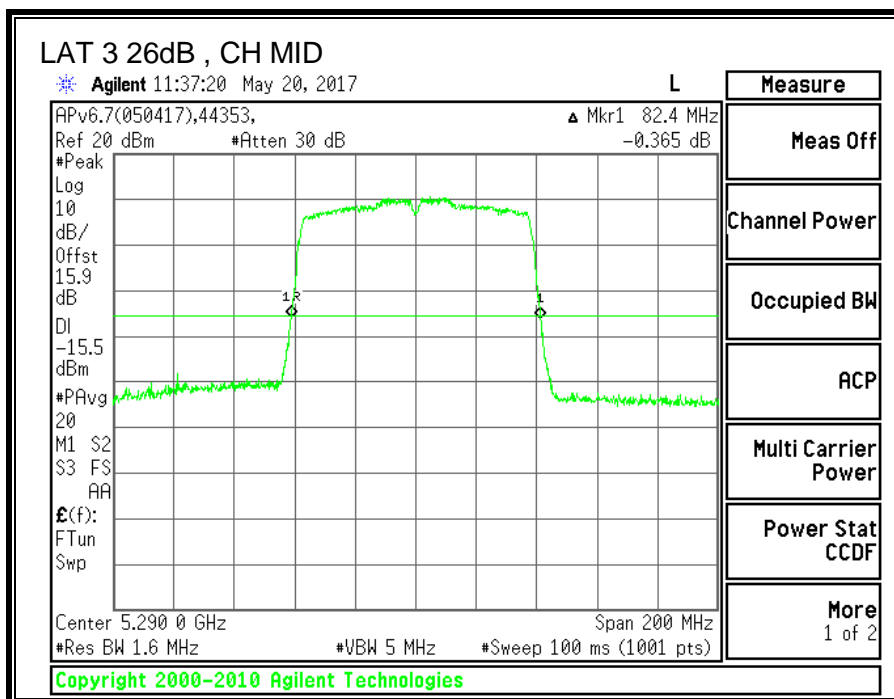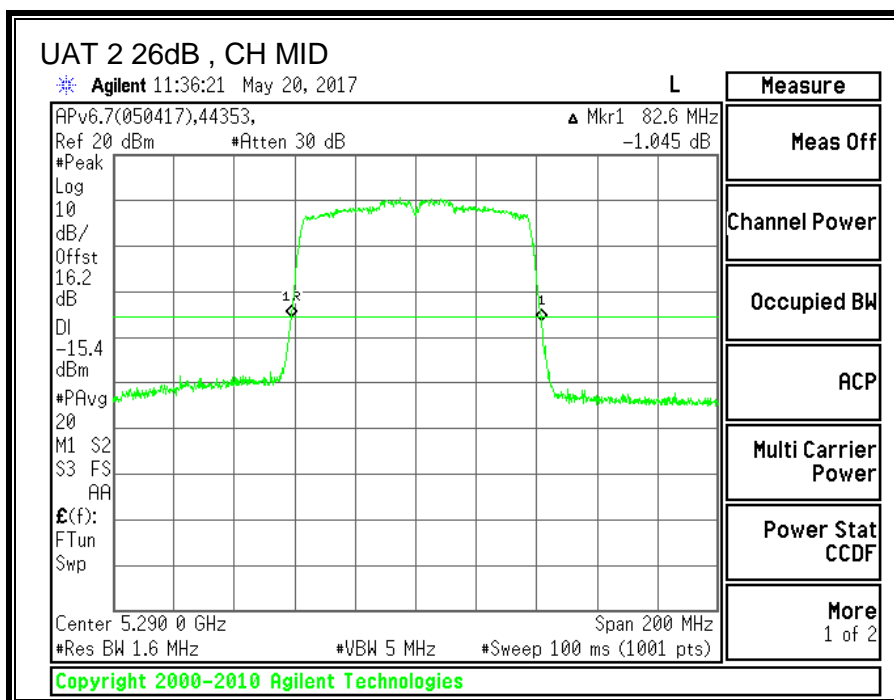



8.18.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)	99% BW LAT 3 (MHz)
Mid	5290	75.2766	75.3810

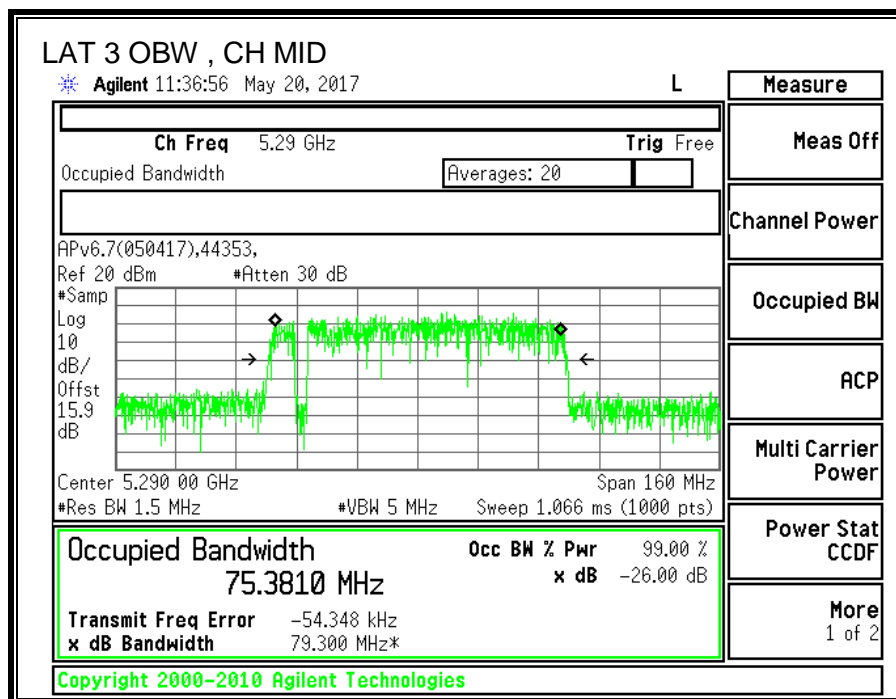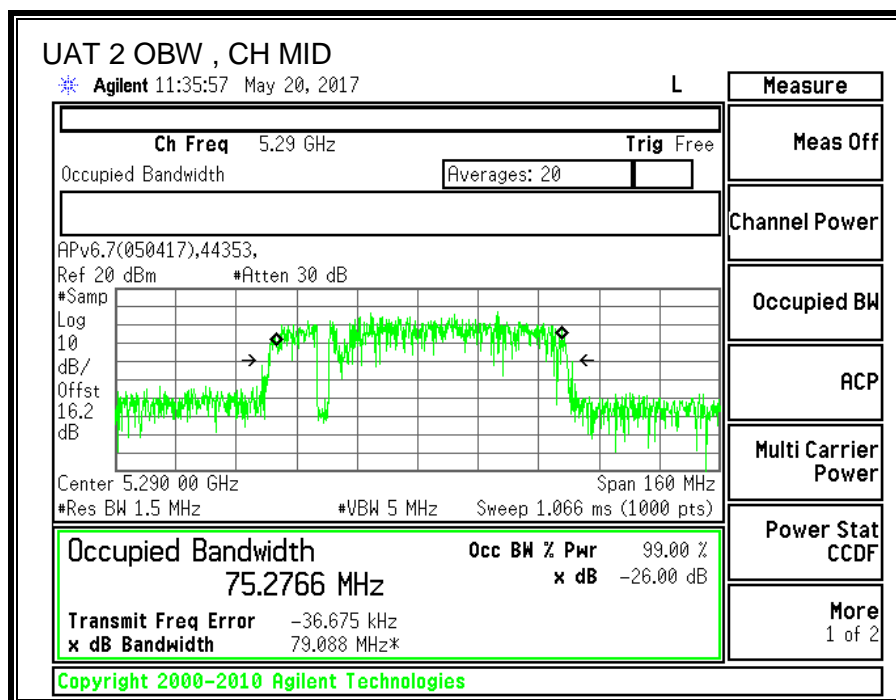

8.18.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Average Power Results

Channel	Frequency (MHz)	UAT 2 Power (dBm)	LAT 3 Power (dBm)	Total Power (dBm)
Mid	5290	16.40	16.32	19.37

8.18.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

DIRECTIONAL ANTENNA GAIN

For Power used uncorrelated gain: The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-2.88	-7.90	-4.70

For PSD used correlated gain: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-2.88	-7.90	-2.02

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5290	82.40	75.28	-4.7	-2.02	24	11.0



Duty Cycle CF (dB)	0.19	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	16.40	16.32	19.37	24.00	-4.63

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5290	3.95	3.81	7.08	11.00	-3.92

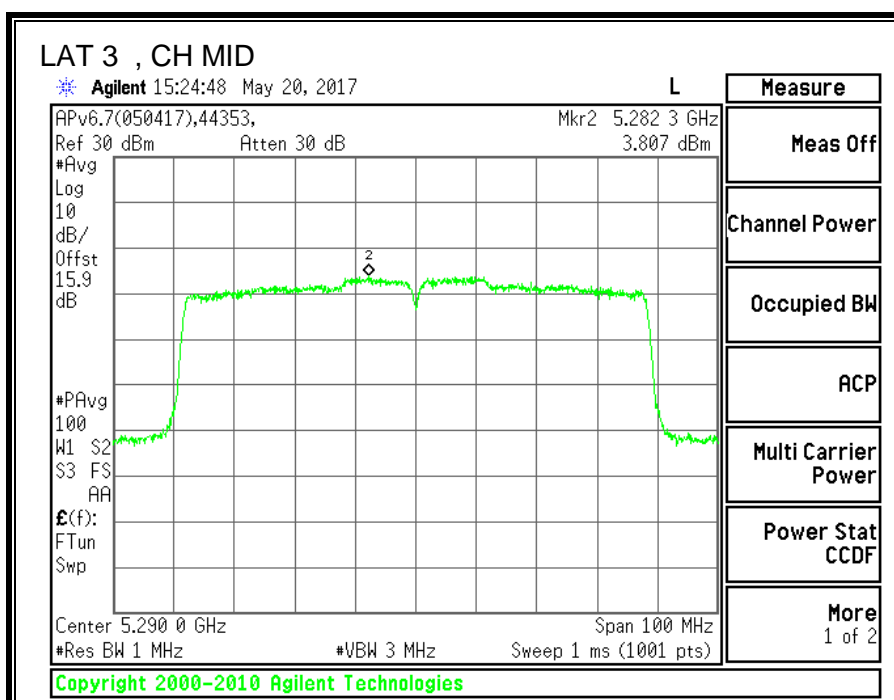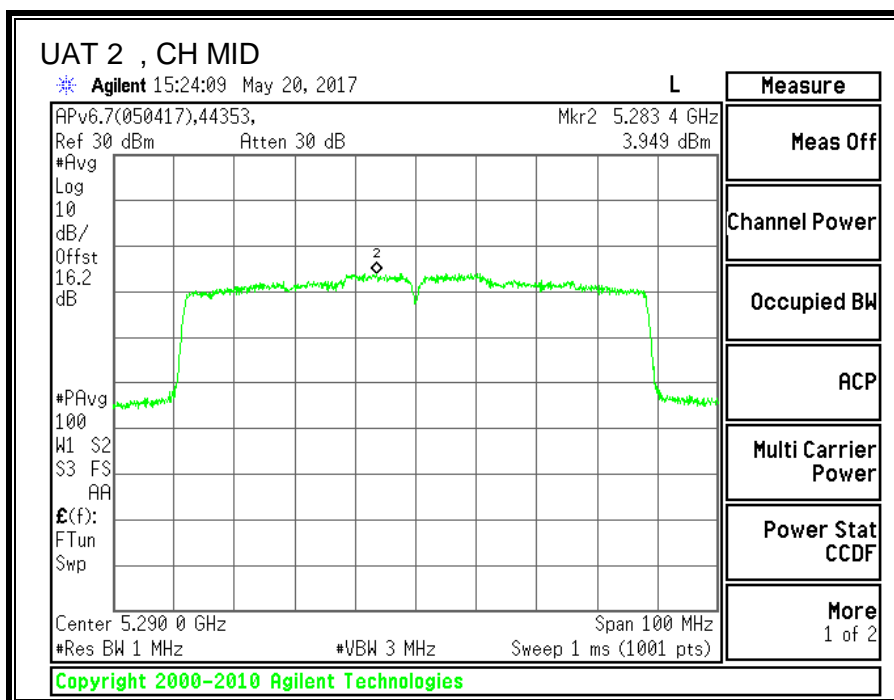

8.19. 11n HT20 UAT 2 SISO MODE IN THE 5.6GHz BAND



8.19.1. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)
Low	5500	17.6120
Mid	5580	17.7236
High	5700	17.7534
144	5720	17.6593

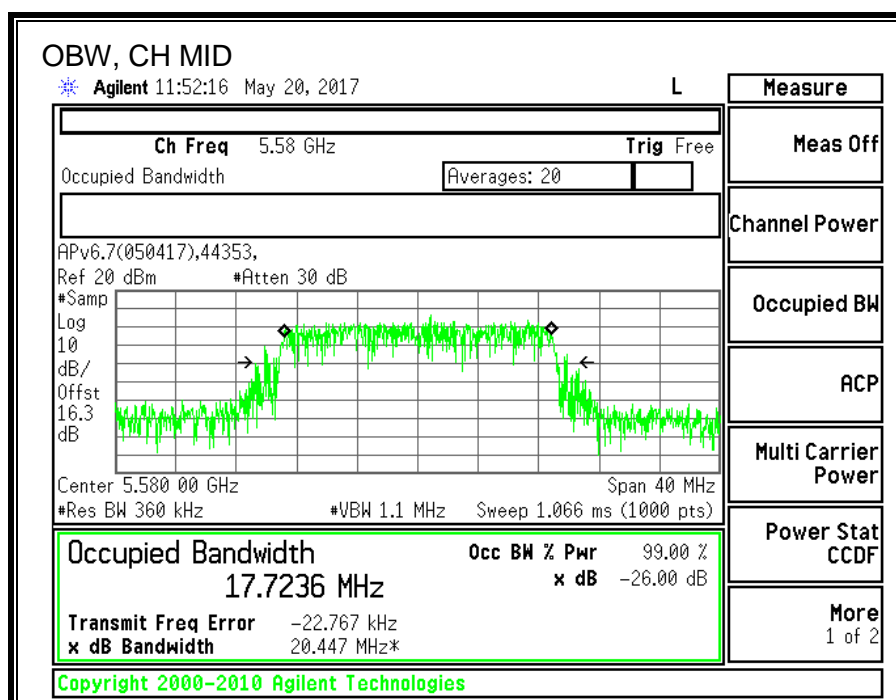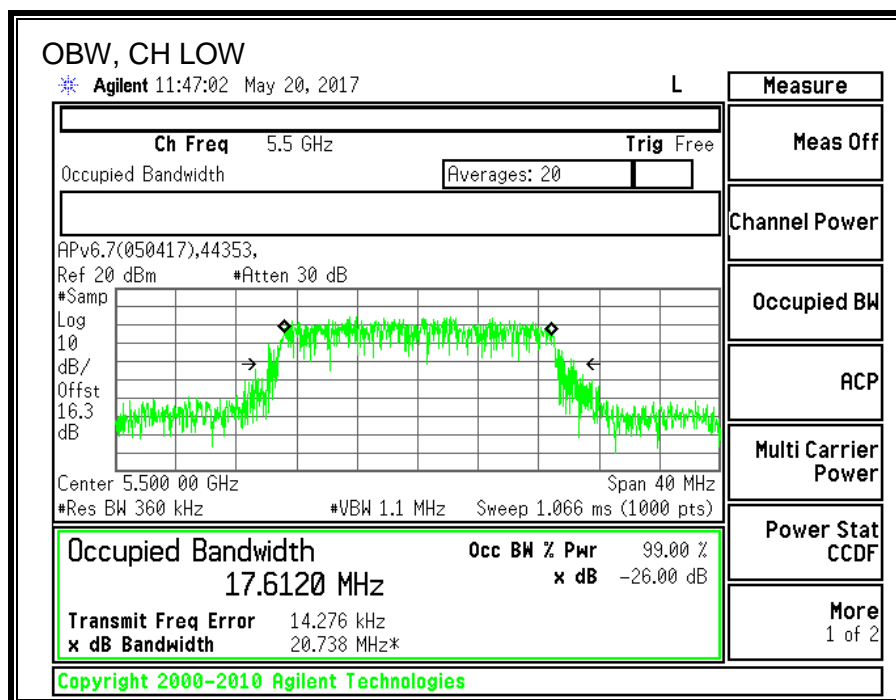

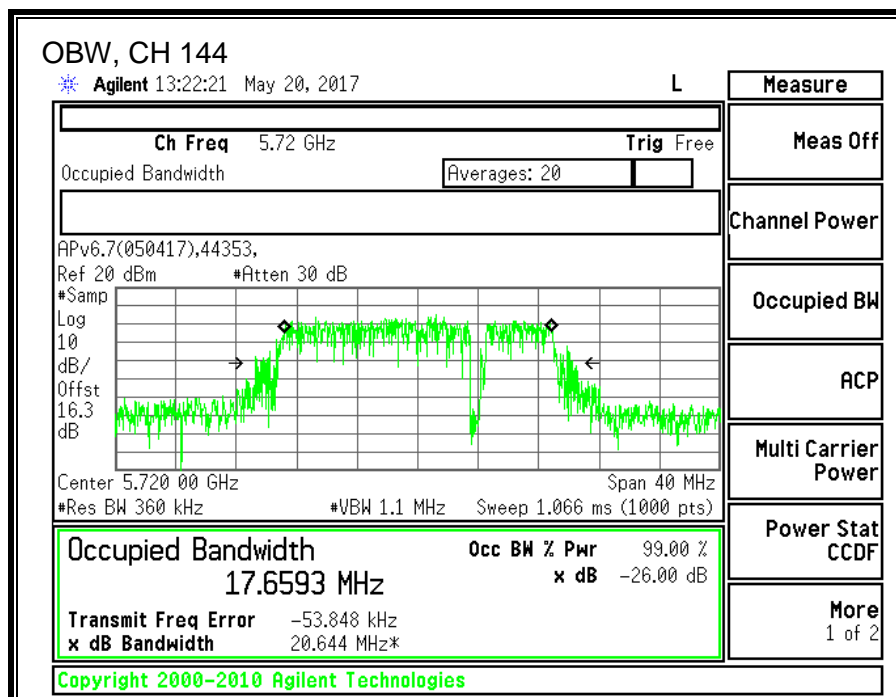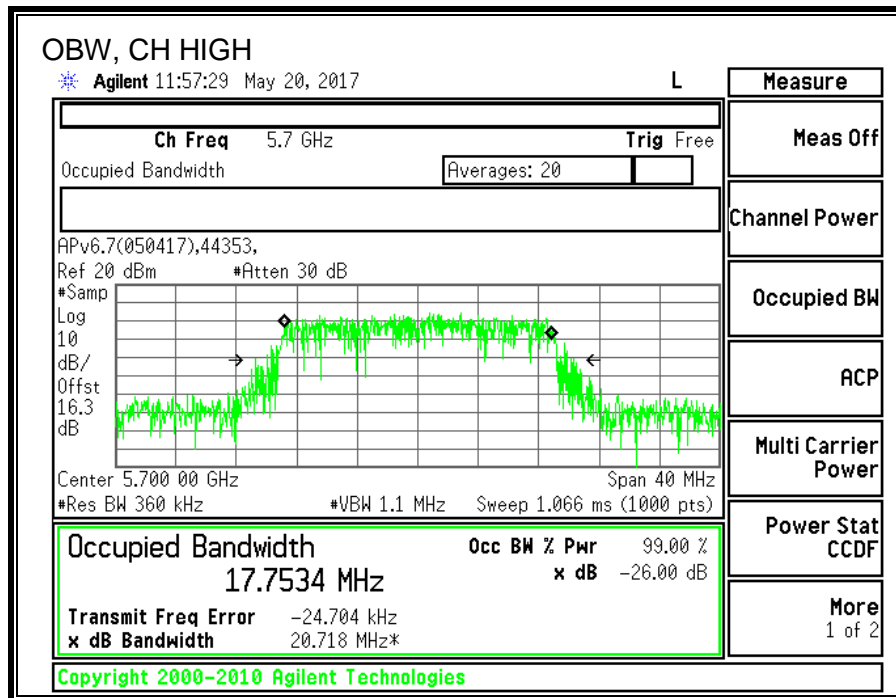



8.19.2. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)
Low	5500	22.05
Mid	5580	22.05
High	5700	22.00
144	5720	22.15

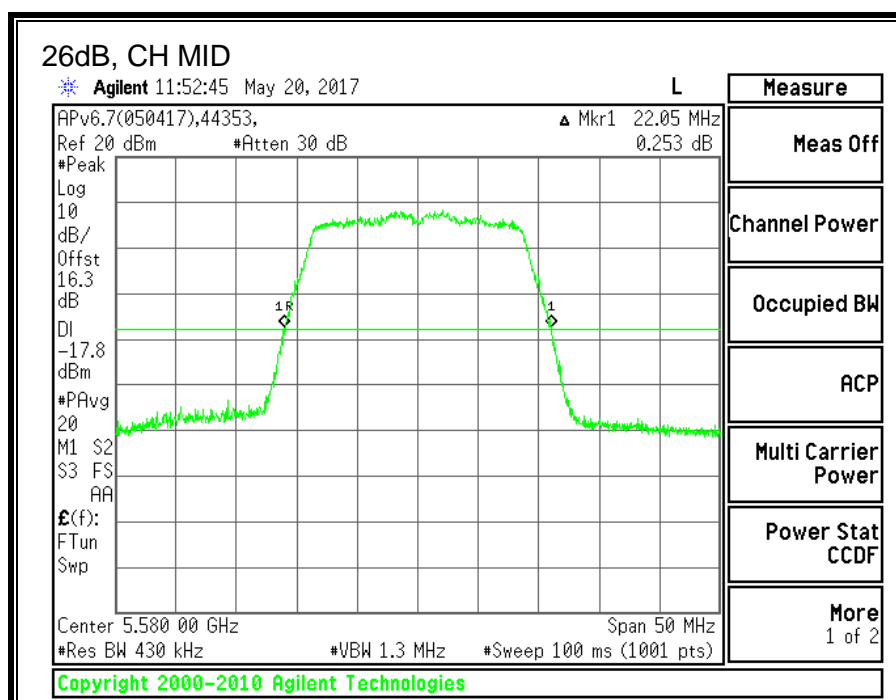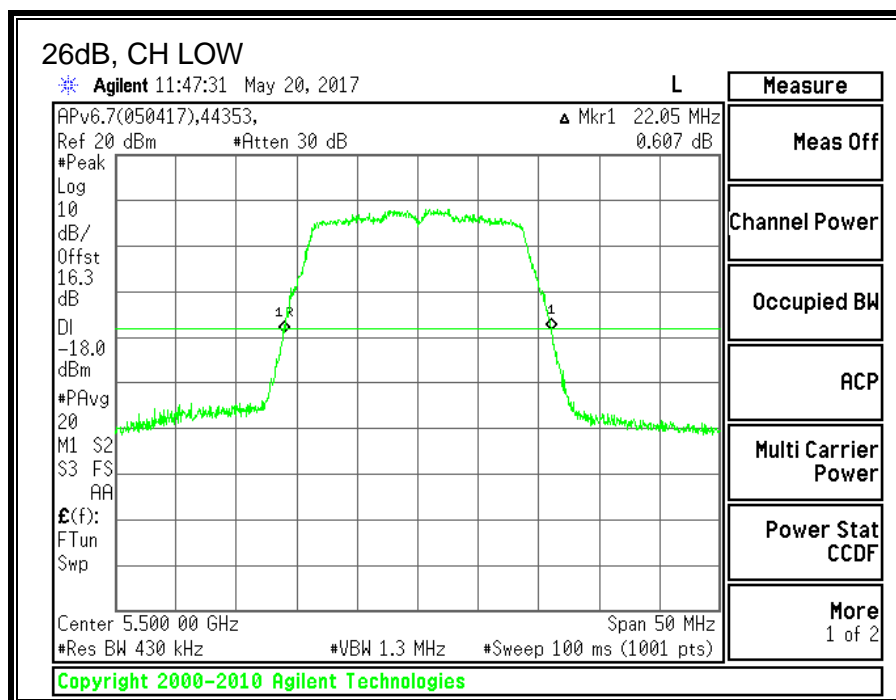

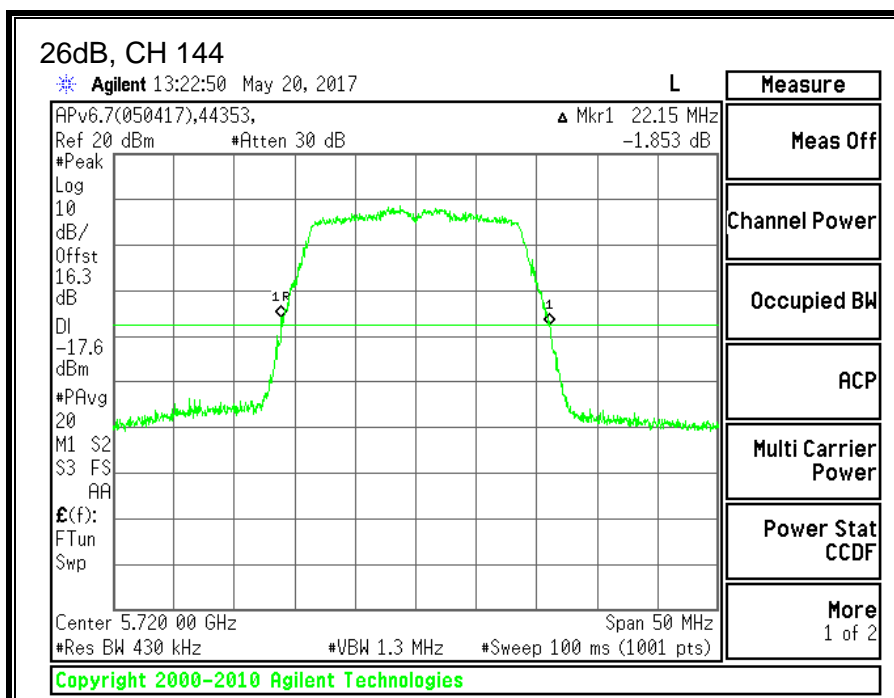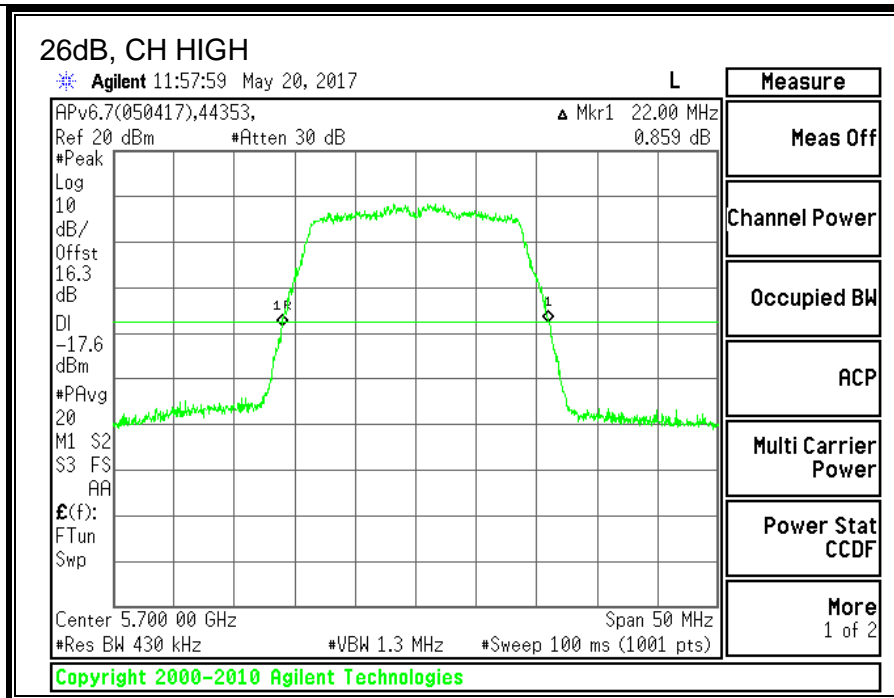

8.19.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power UAT 2 (dBm)
Low	5500	18.88
Mid	5580	20.93
High	5700	18.85
144	5720	20.94

8.19.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04 Section F (SA-2 method)

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits



Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5500	22.05	17.61	-2.13	23.46	11.00
Mid	5580	22.05	17.72	-2.13	23.49	11.00
High	5700	22.00	17.75	-2.13	23.49	11.00
Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD			


Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	18.88	18.88	23.46	-4.58
Mid	5580	20.93	20.93	23.49	-2.56
High	5700	18.85	18.85	23.49	-4.64

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5500	10.696	10.696	11.00	-0.30
Mid	5580	9.982	9.982	11.00	-1.02
High	5700	9.568	9.568	11.00	-1.43

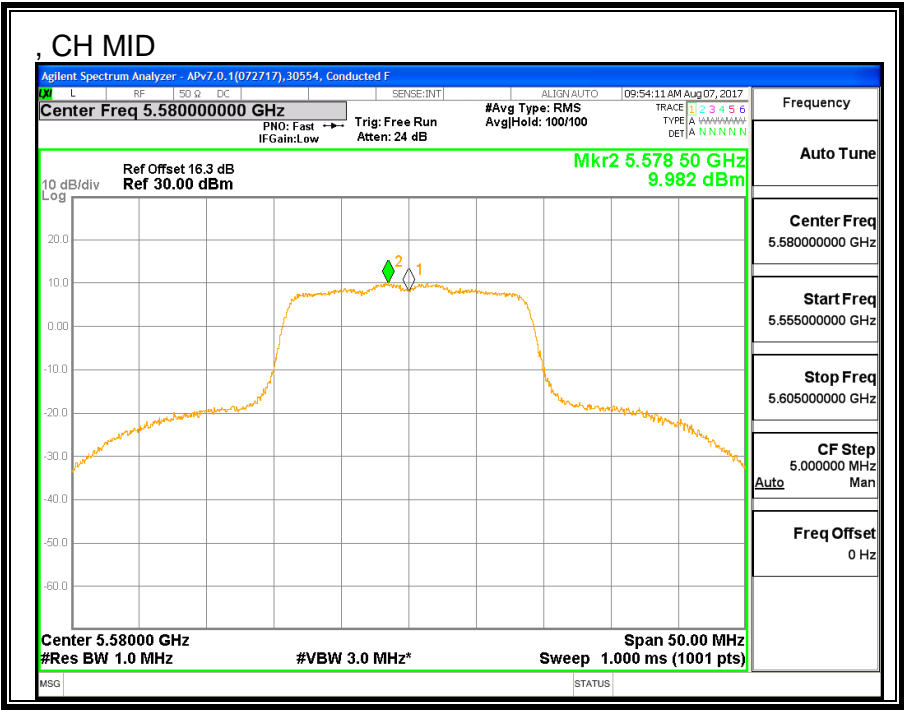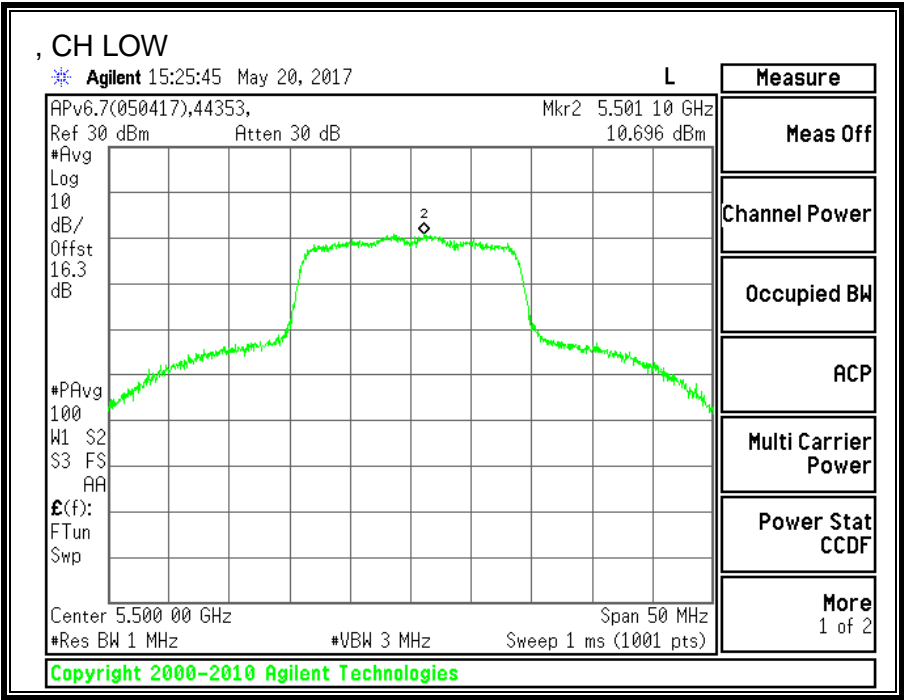

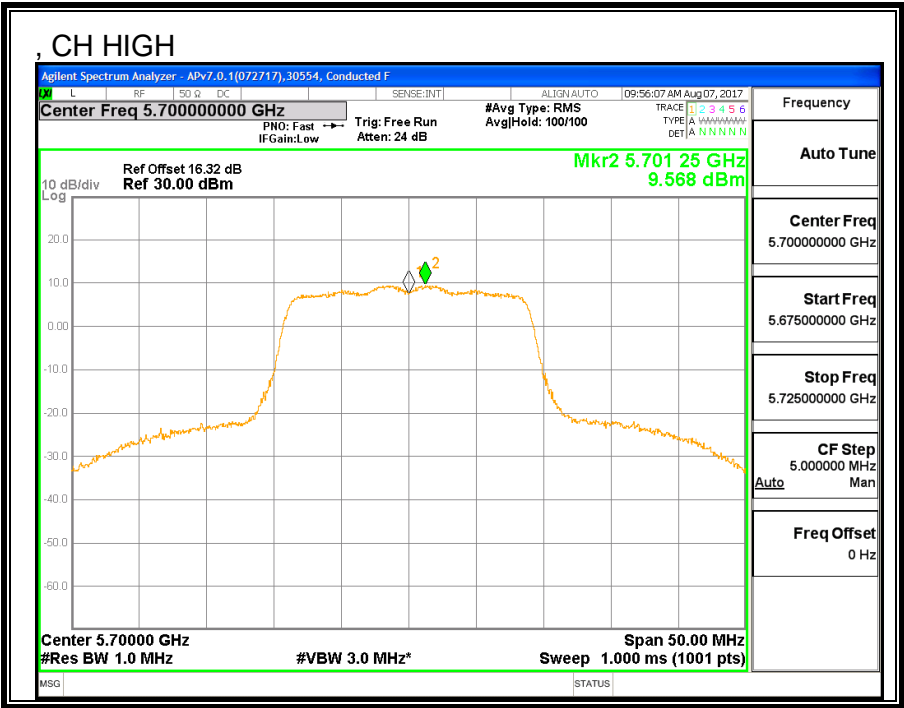

8.19.5. 11ac HT20 UAT 2 SISO STRADDLE CHANNEL 144

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	82.40	-2.13	-2.13	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	20.14	20.14	24.00	-3.86

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	10.75	10.75	11.00	-0.25

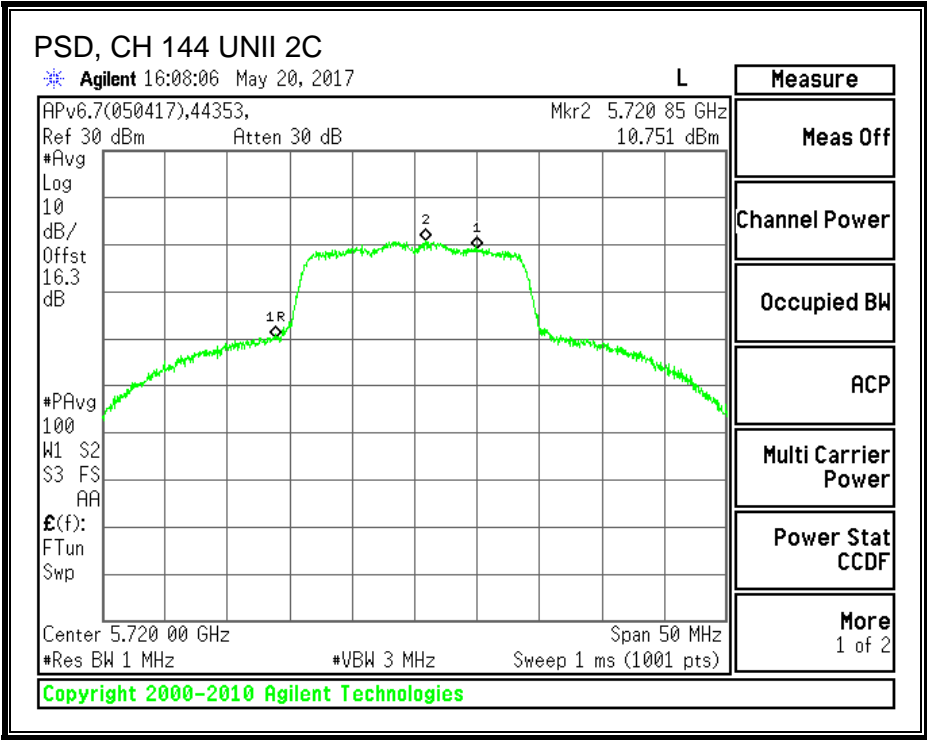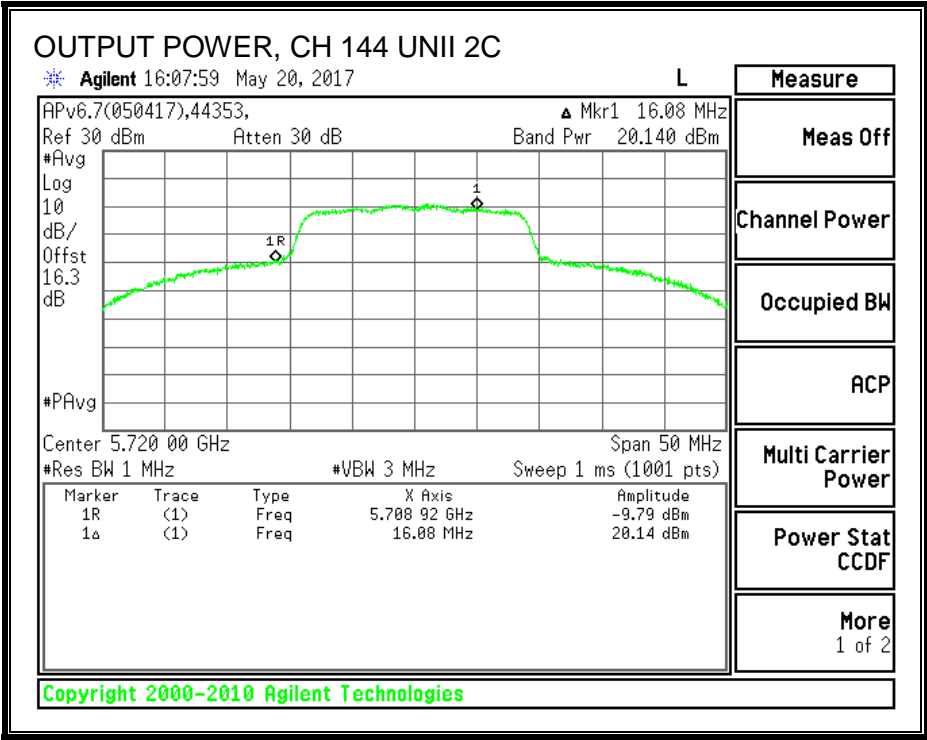

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	82.40	-2.71	30.00	30.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	13.687	13.687	30.00	-16.31

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	6.838	6.838	30.00	-23.16

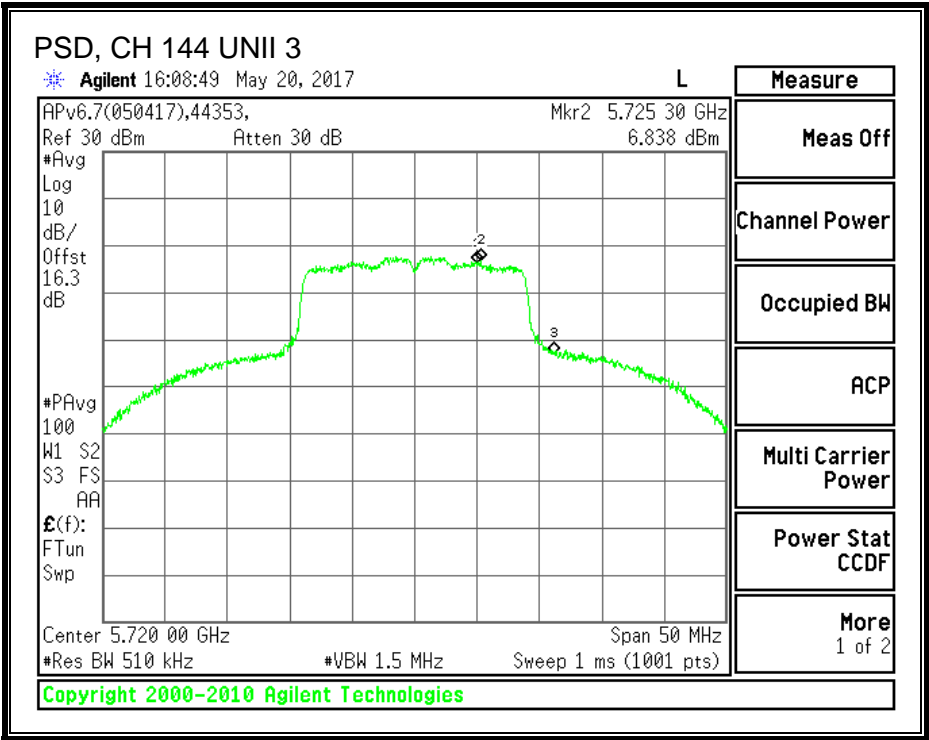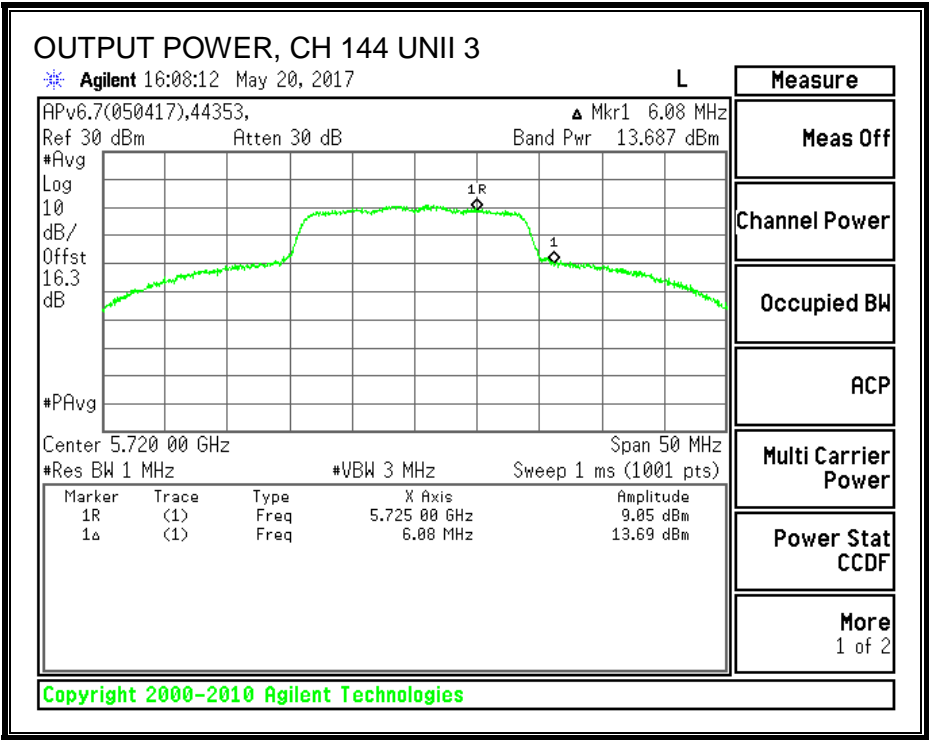

8.19.6. 6 dB BANDWIDTH


LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	3.95

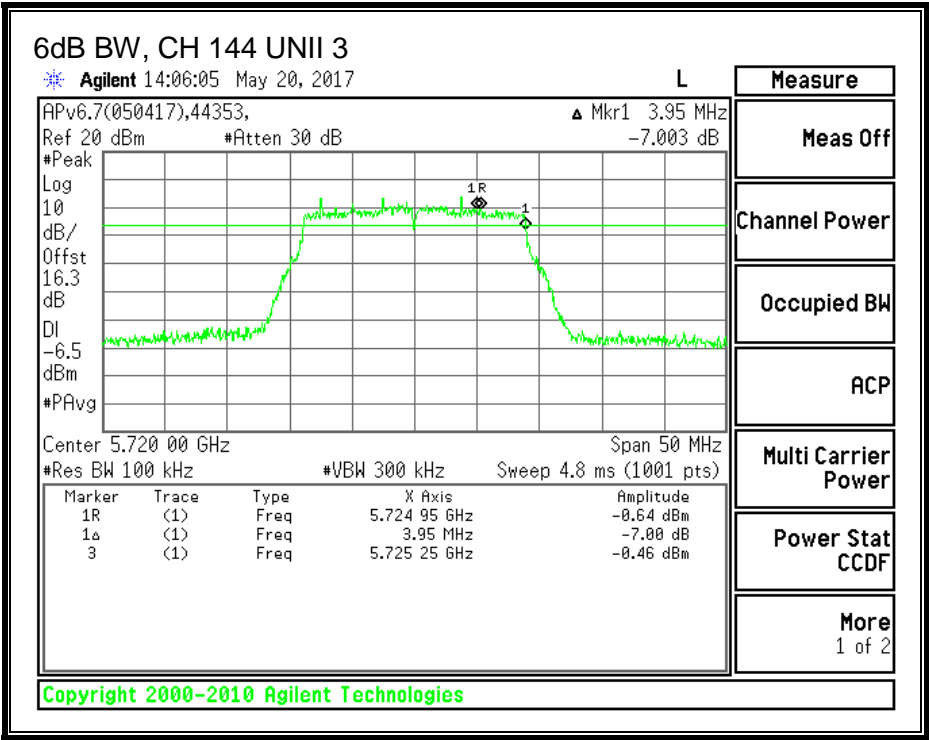

8.20. 11n HT20 LAT 3 SISO MODE IN THE 5.6GHz BAND



8.20.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Low	5500	21.85
Mid	5580	22.15
High	5700	22.20
144	5720	22.15

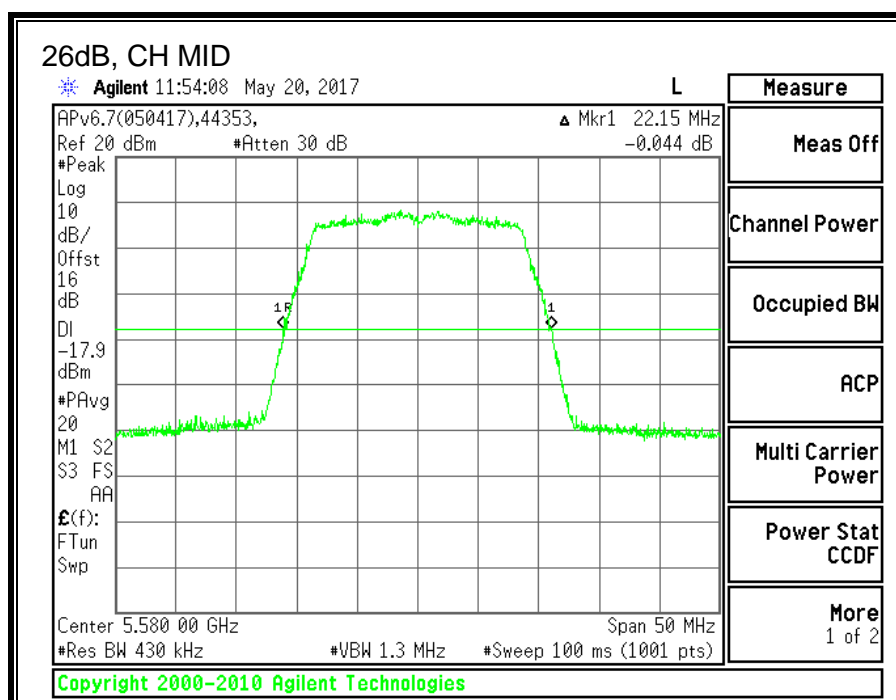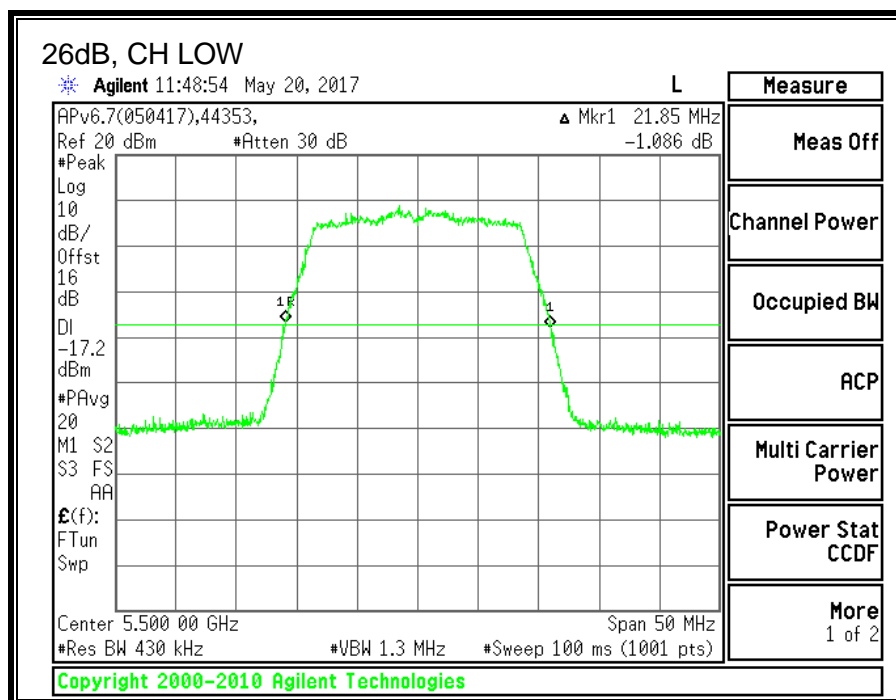

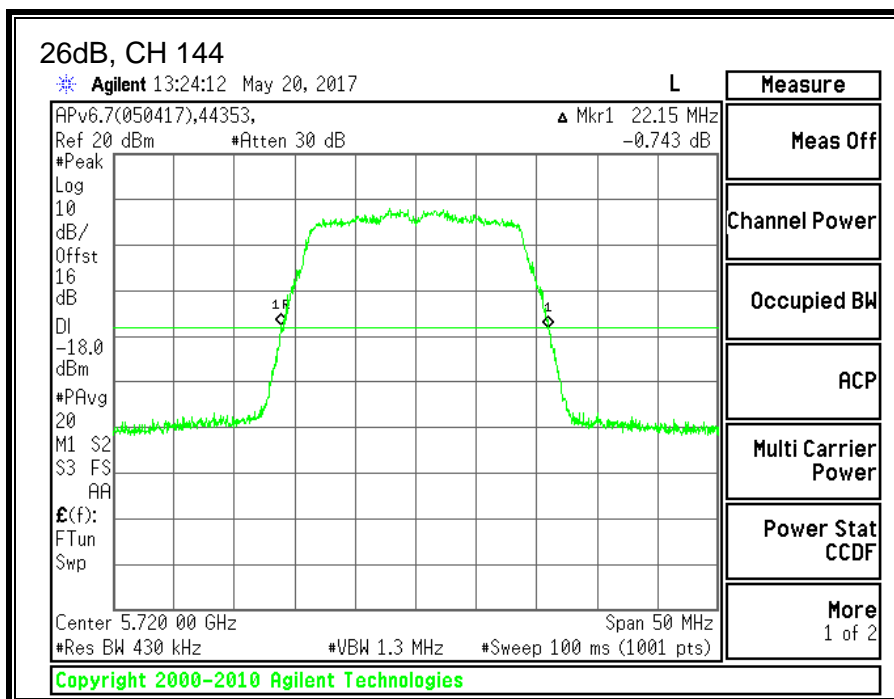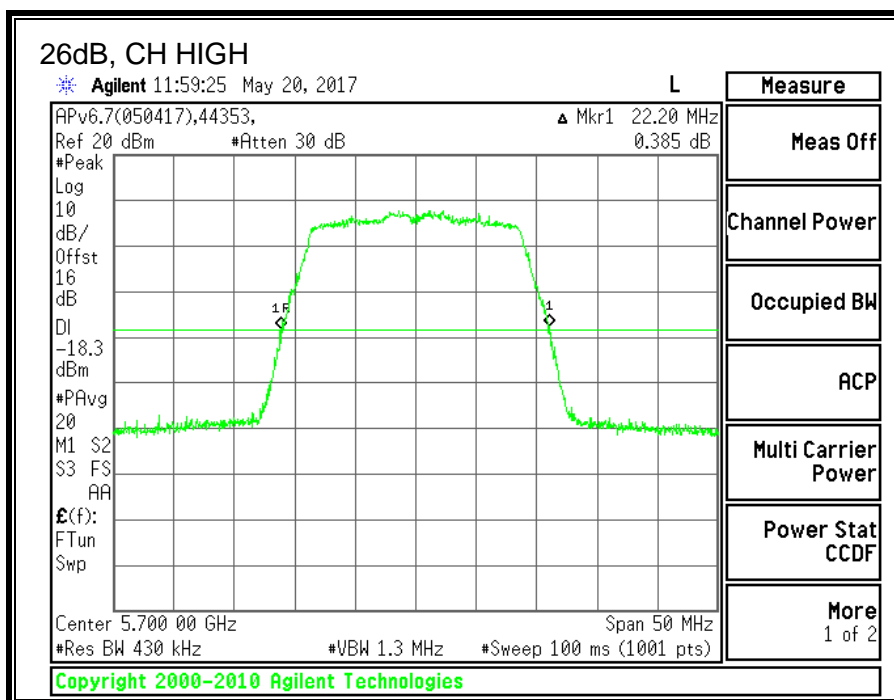



8.20.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW LAT 3 (MHz)
Low	5500	17.689
Mid	5580	17.653
High	5700	17.675
144	5720	17.707

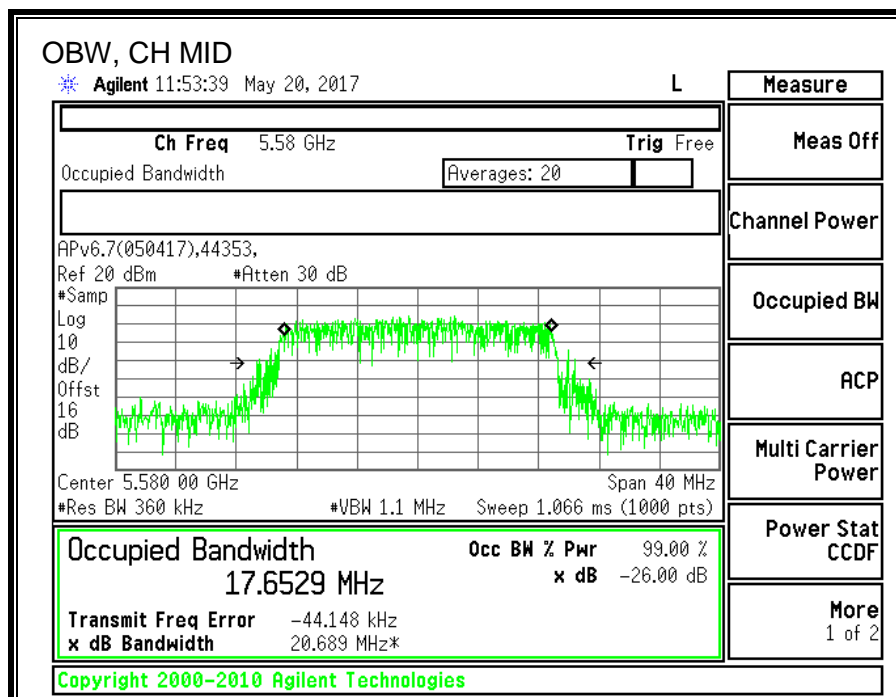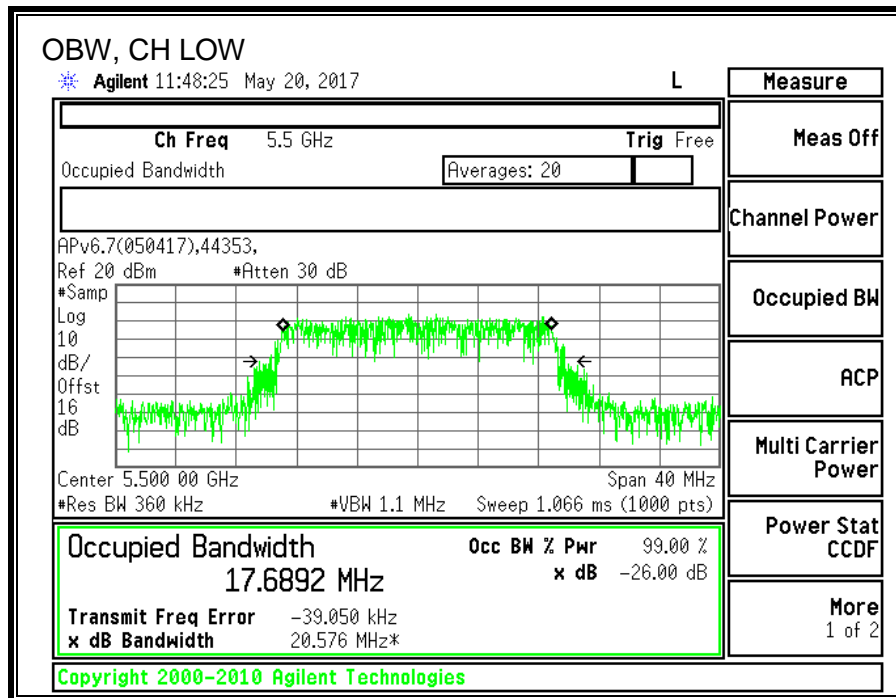

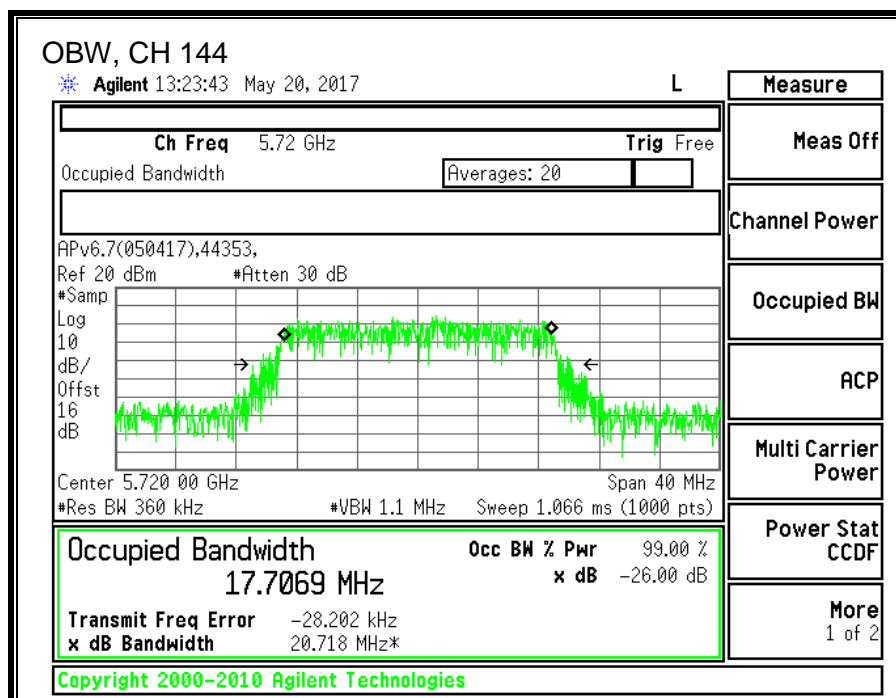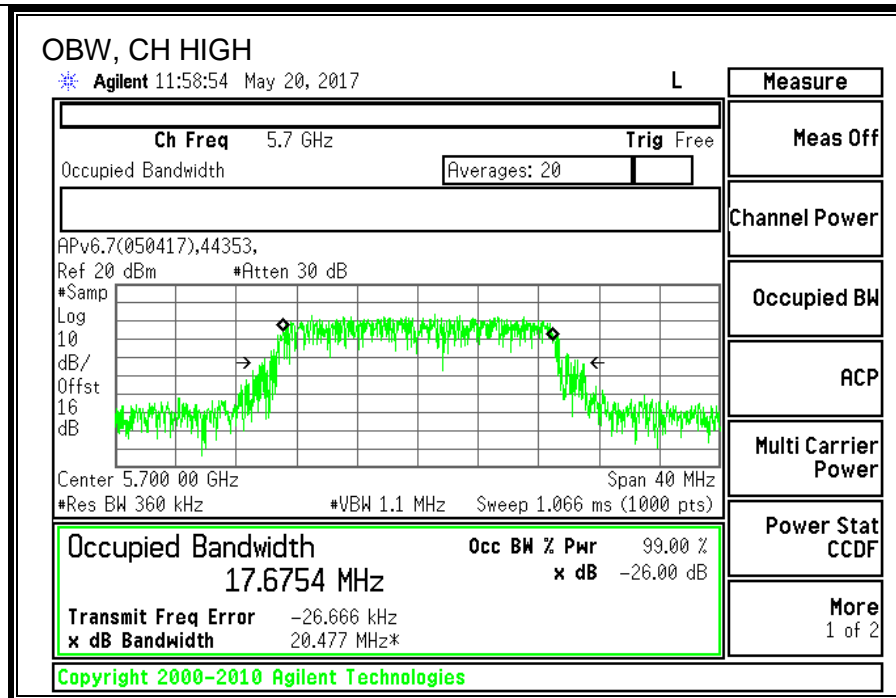

8.20.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power LAT 3 (dBm)
Low	5500	18.85
Mid	5580	20.91
High	5700	18.87
144	5720	20.82

8.20.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04, Section F (Method SA-2).

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5500	21.85	17.69	-7.97	23.48	11.00
Mid	5580	22.15	17.65	-7.97	23.47	11.00
High	5700	22.20	17.68	-7.97	23.47	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	18.85	18.85	23.48	-4.63
Mid	5580	20.91	20.91	23.47	-2.56
High	5700	18.87	18.87	23.47	-4.60

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5500	10.432	10.432	11.00	-0.57
Mid	5580	10.824	10.824	11.00	-0.18
High	5700	10.832	10.832	11.00	-0.17

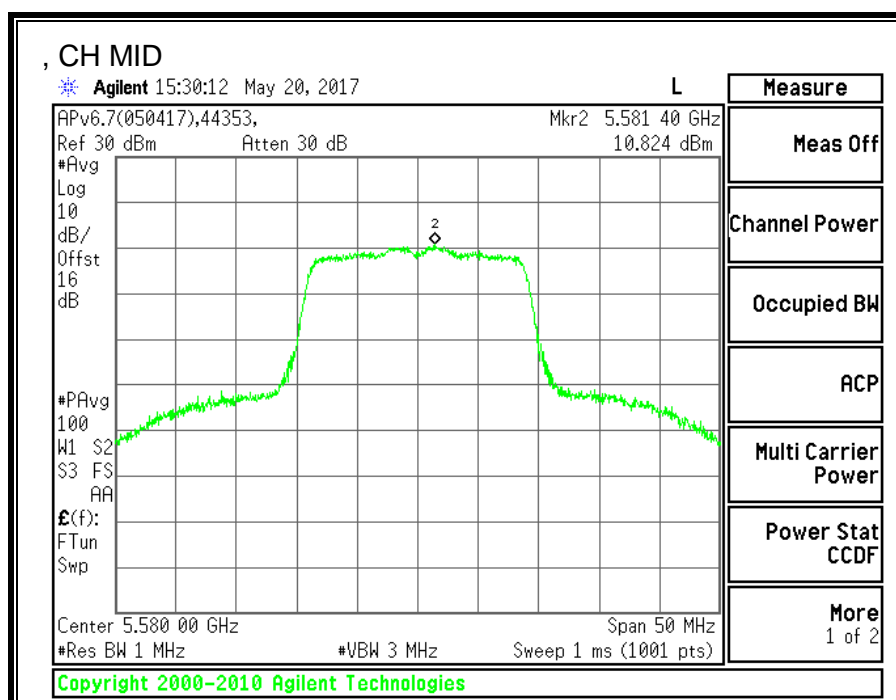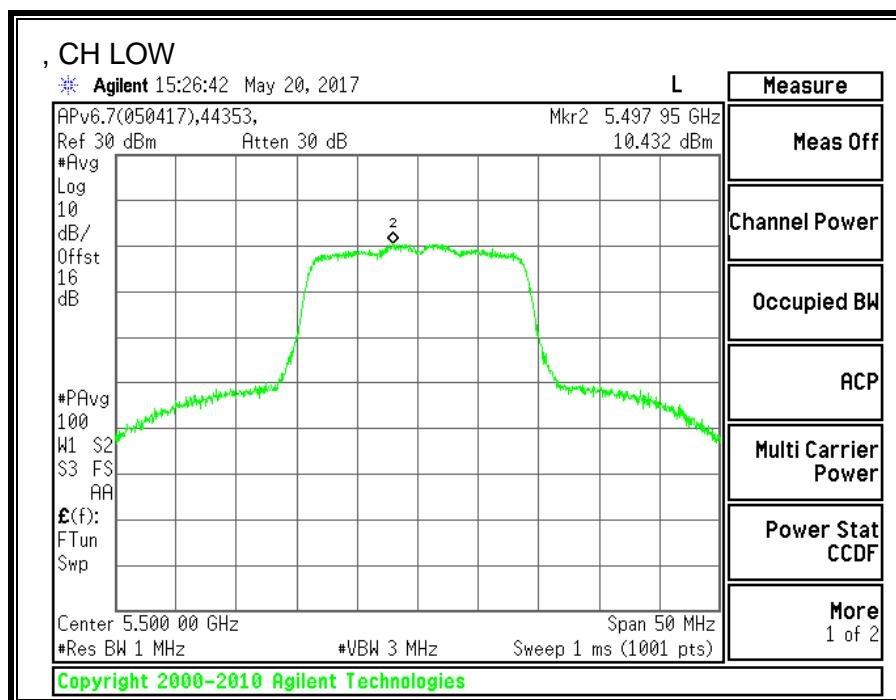

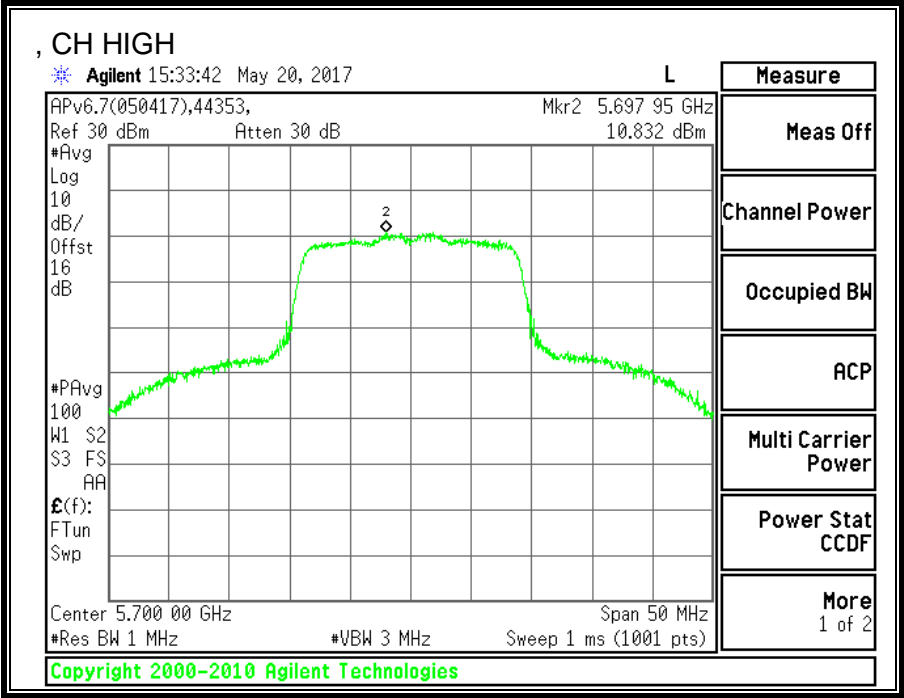

8.20.5. 11ac HT20 LAT 3 SISO STRADDLE CHANNEL 144

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	22.15	-7.97	-7.97	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	19.98	19.98	24.00	-4.02

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	10.86	10.86	11.00	-0.14

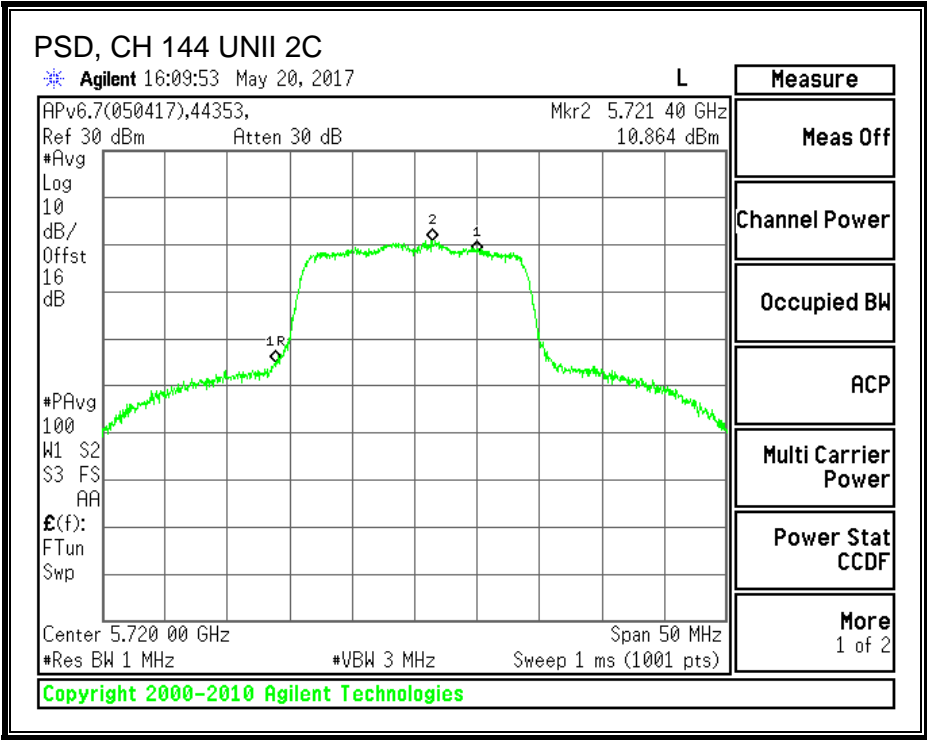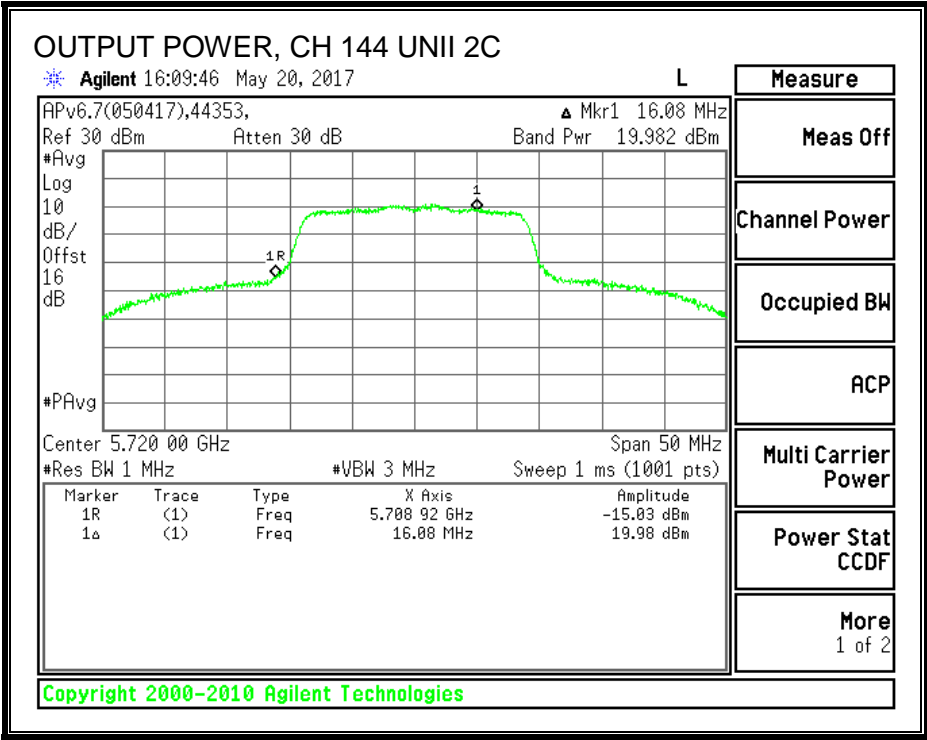

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	22.15	-7.67	30.00	30.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	13.457	13.457	30.00	-16.54

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	6.317	6.317	30.00	-23.68

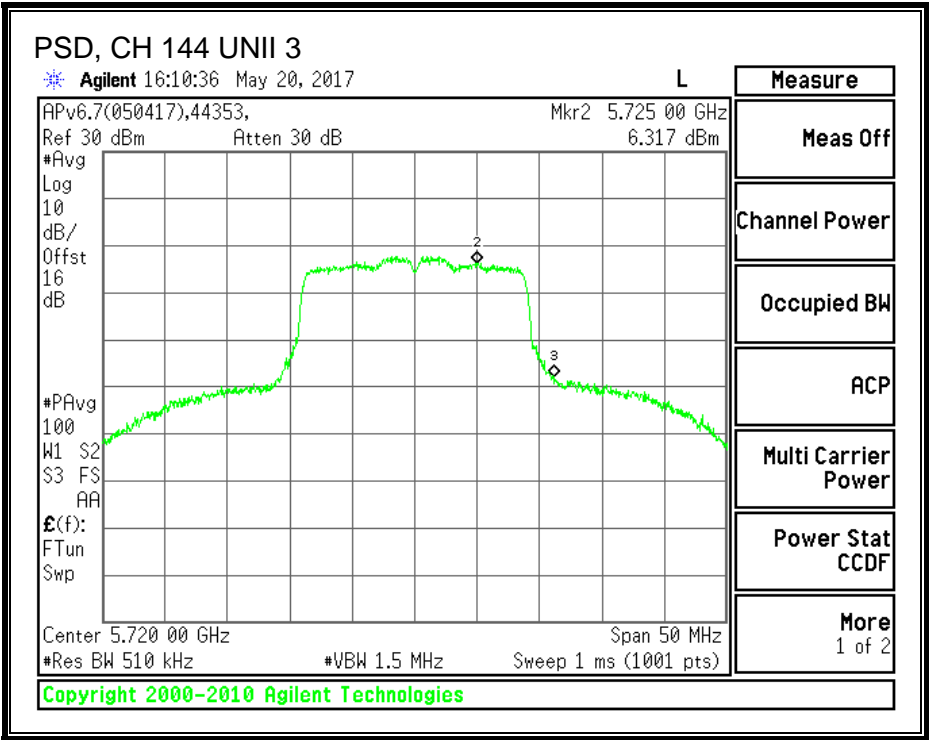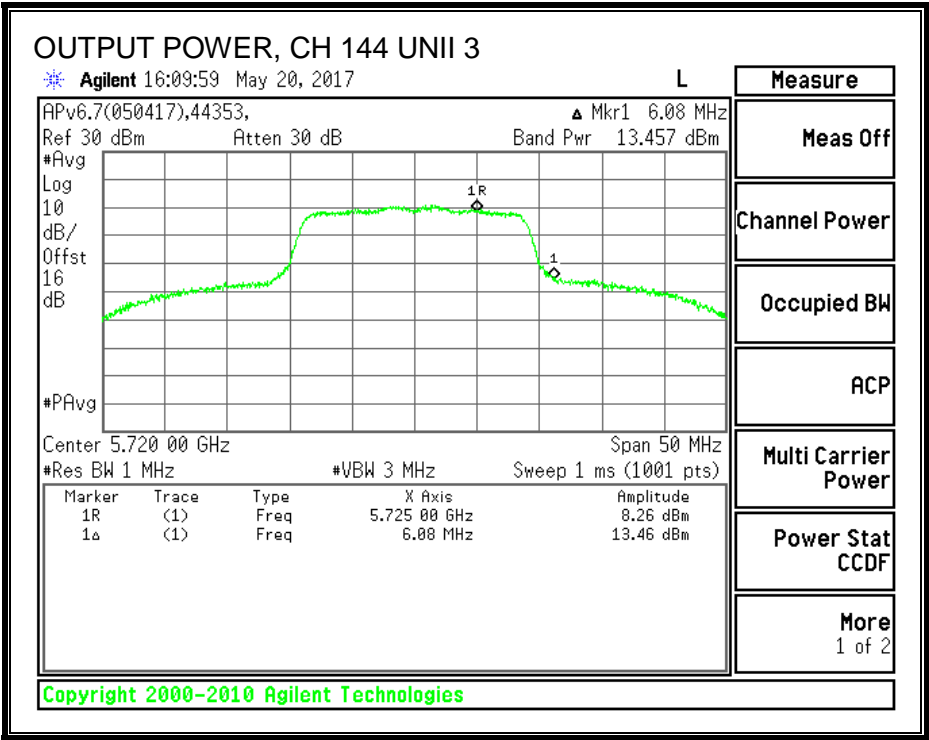

8.20.6. 6 dB BANDWIDTH


LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	3.75

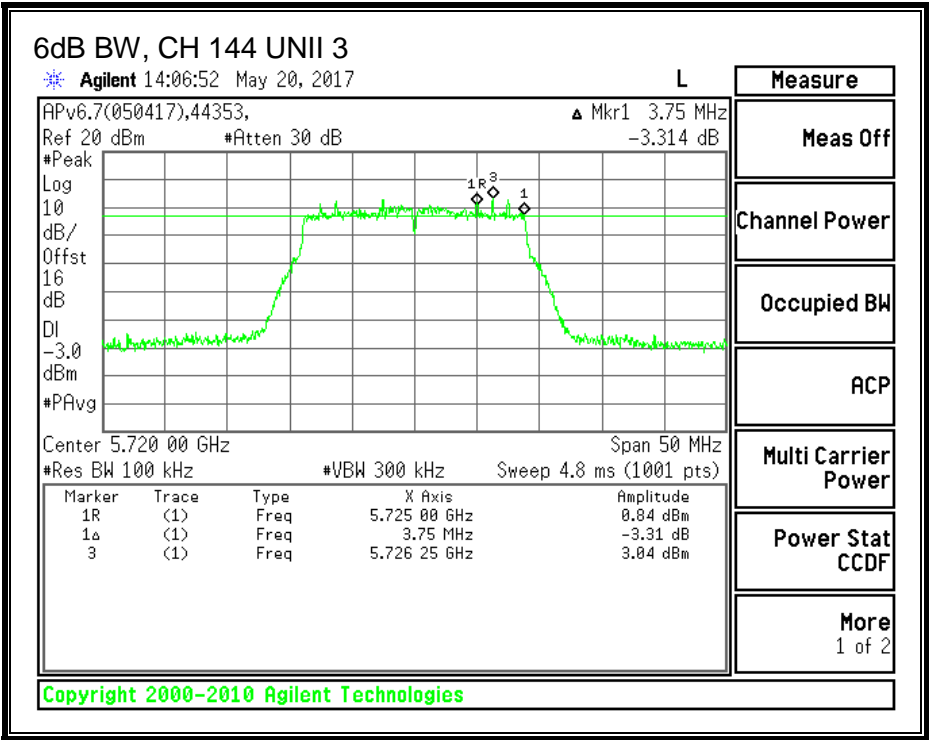

8.21. 11n HT20 2TX CDD MIMO MODE IN THE 5.6GHz BAND



8.21.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.



RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)	26 dB BW LAT 3 (MHz)
Low	5500	22.00	21.60
Mid	5580	21.75	21.65
High	5700	22.15	21.60
144	5720	22.10	21.55

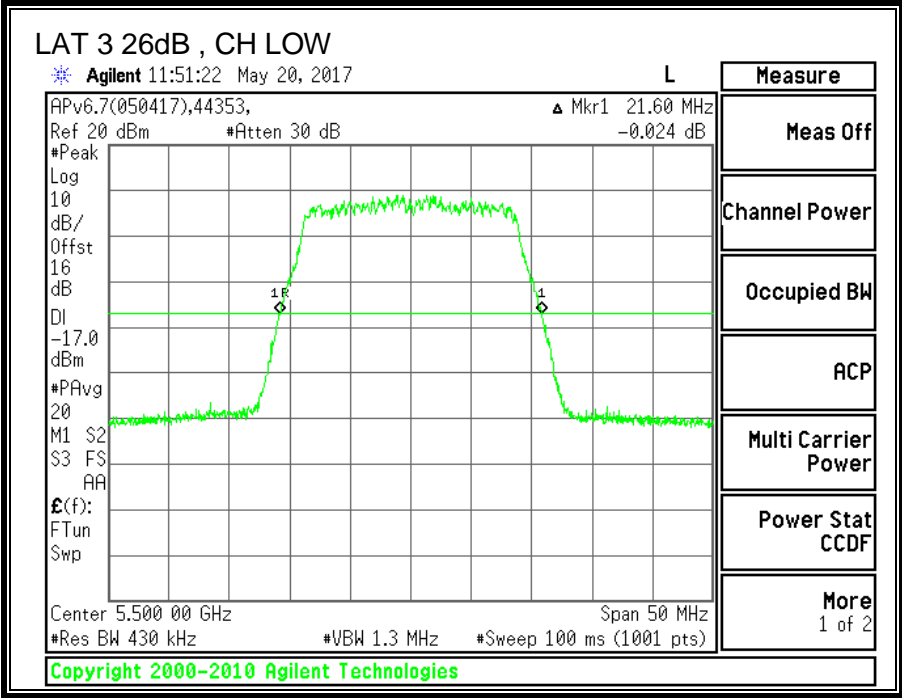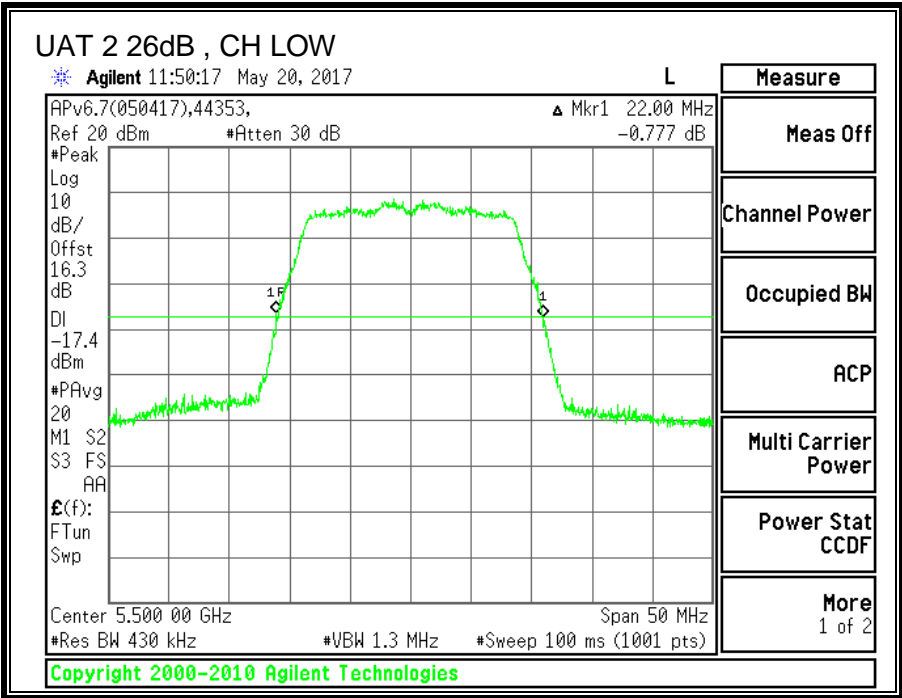

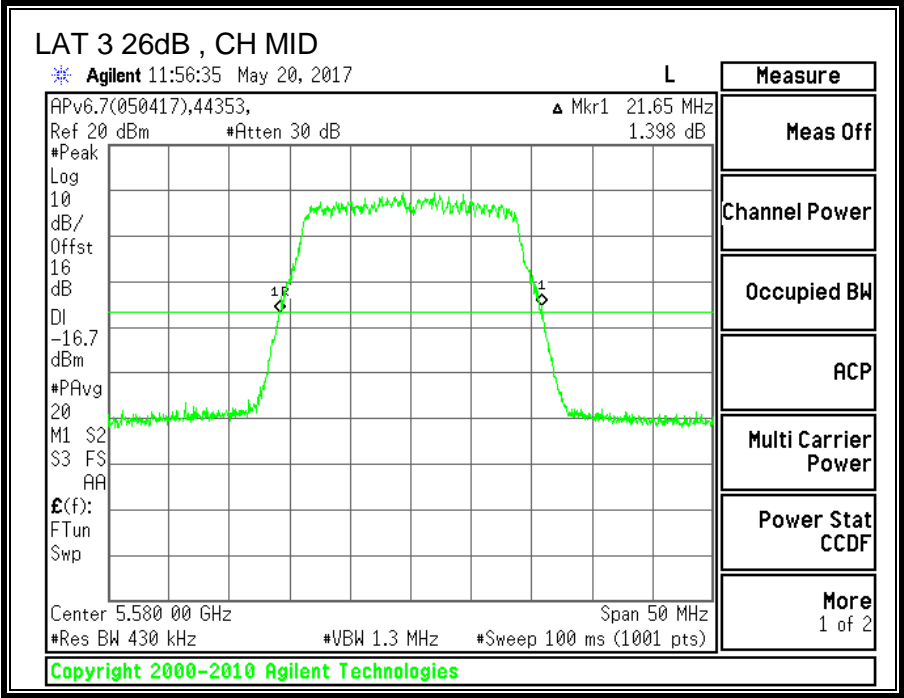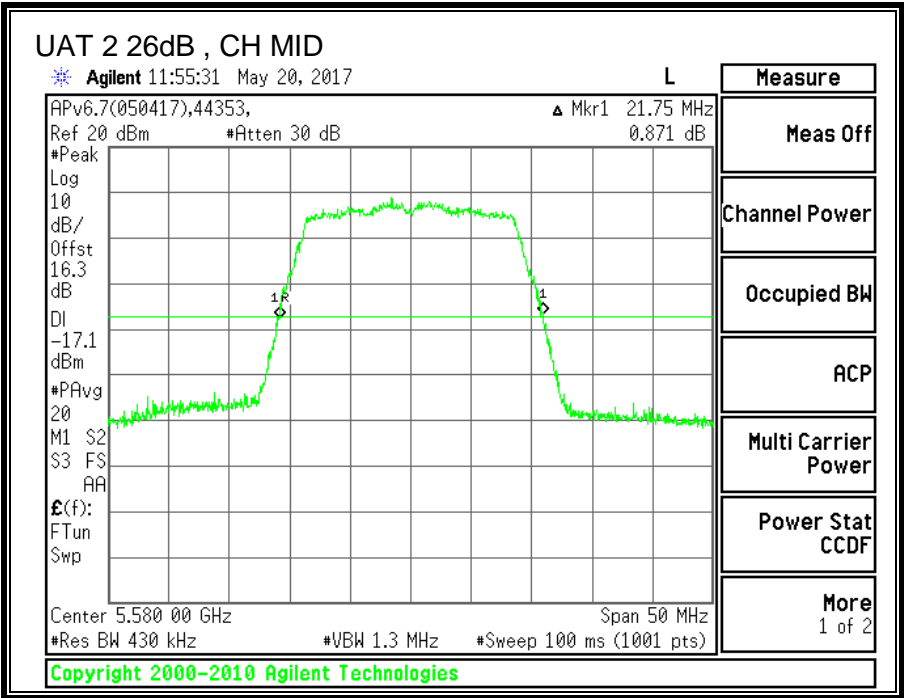

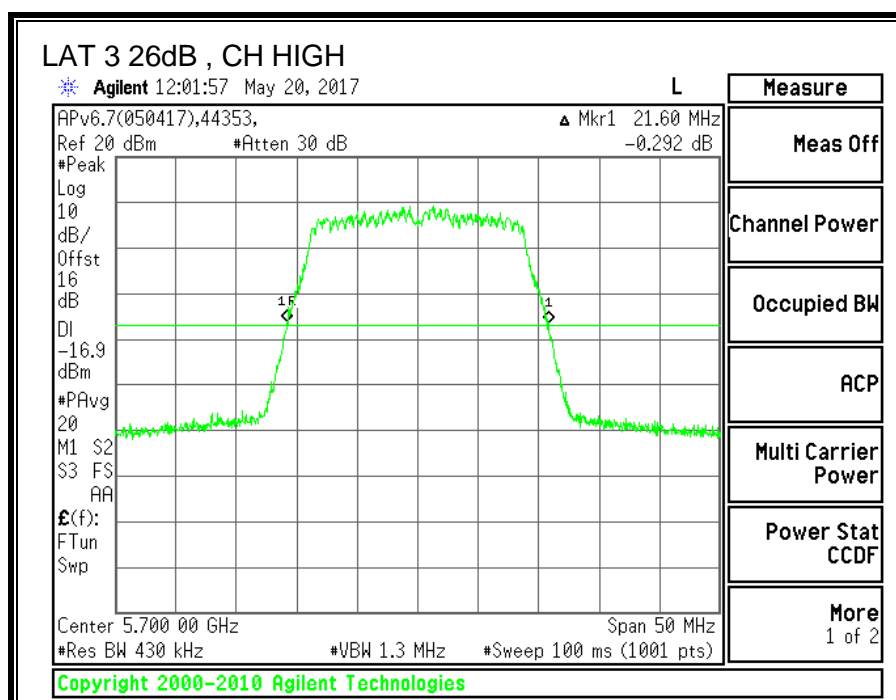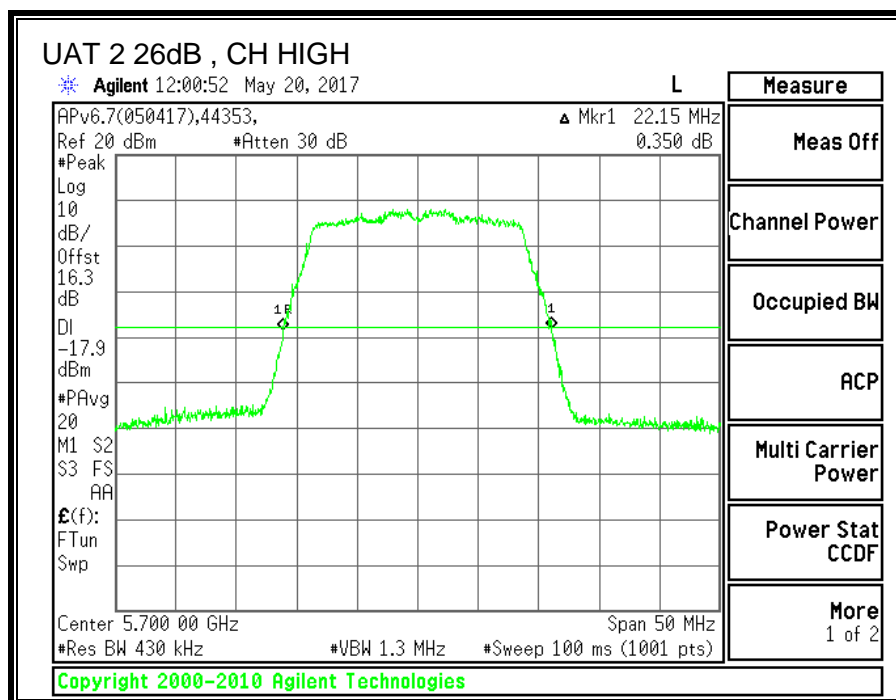

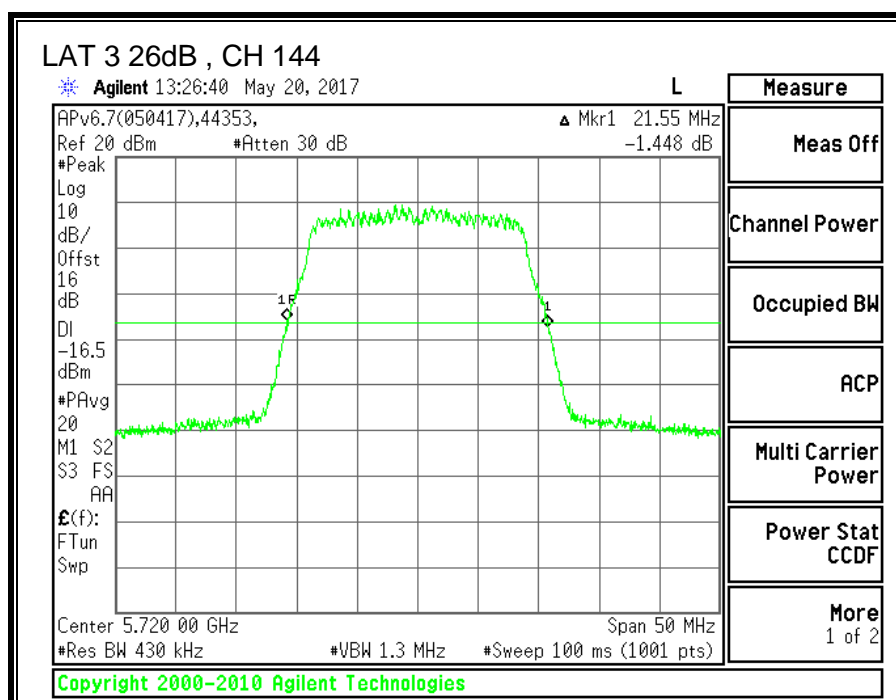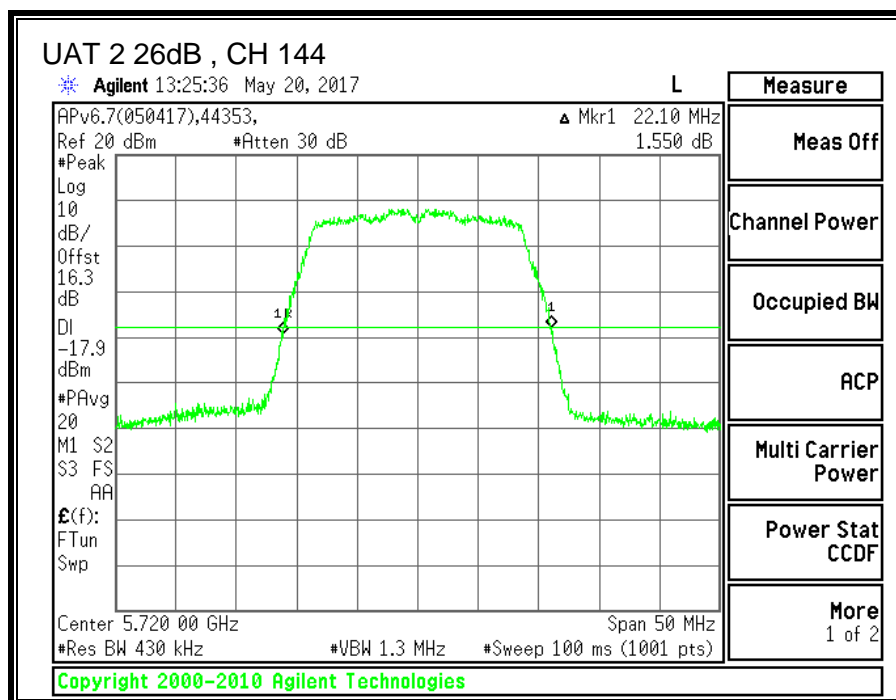



8.21.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.



RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)	99% BW LAT 3 (MHz)
Low	5500	17.7072	17.6196
Mid	5580	17.6729	17.6683
High	5700	17.6872	17.6200
144	5720	17.6856	17.7138

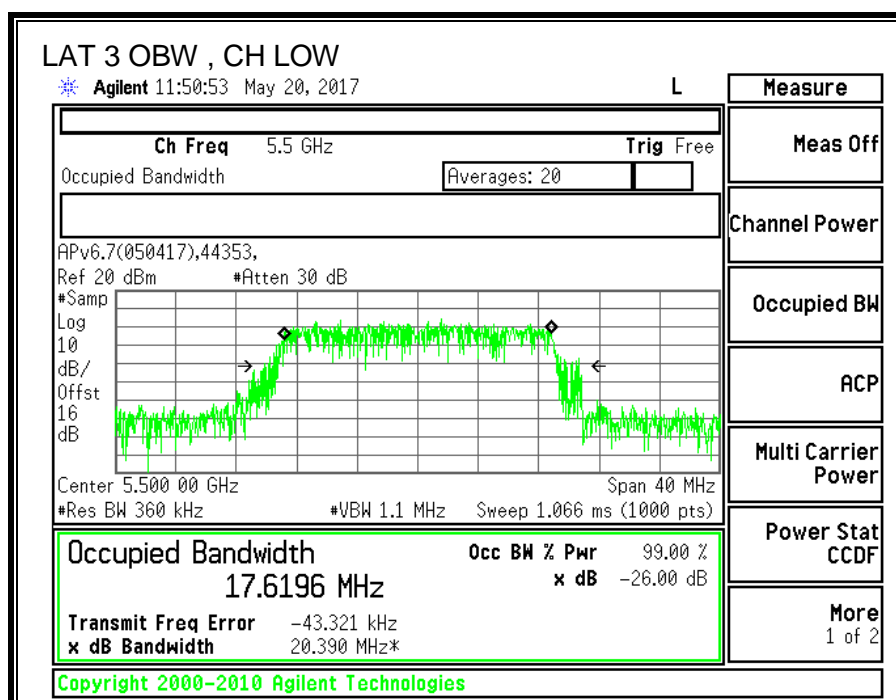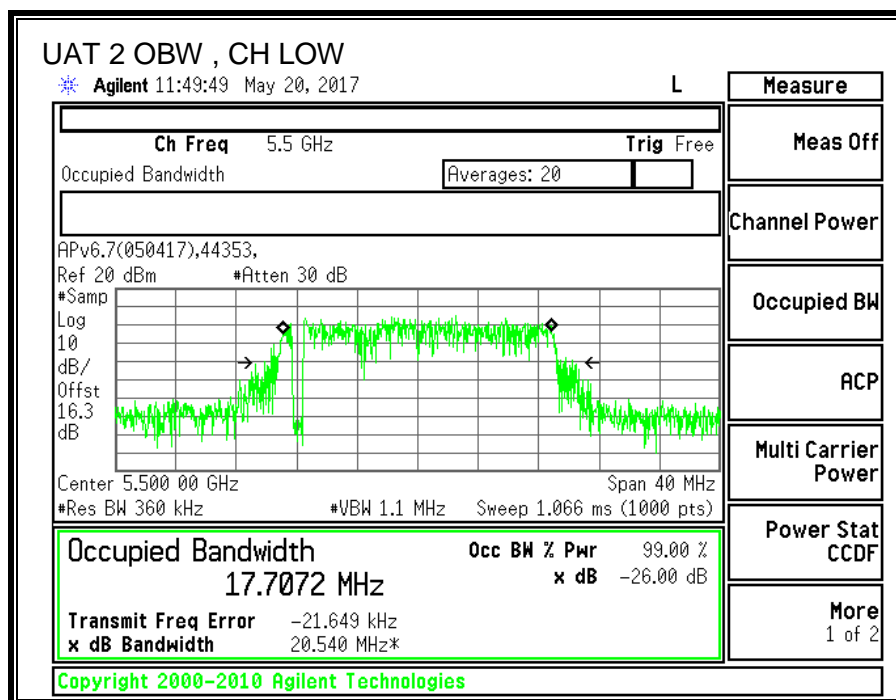

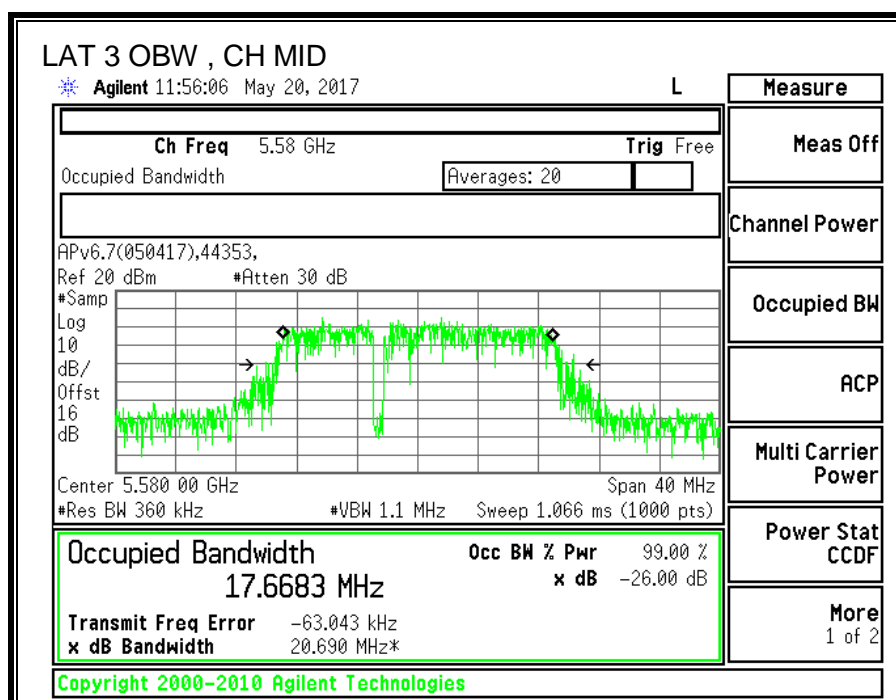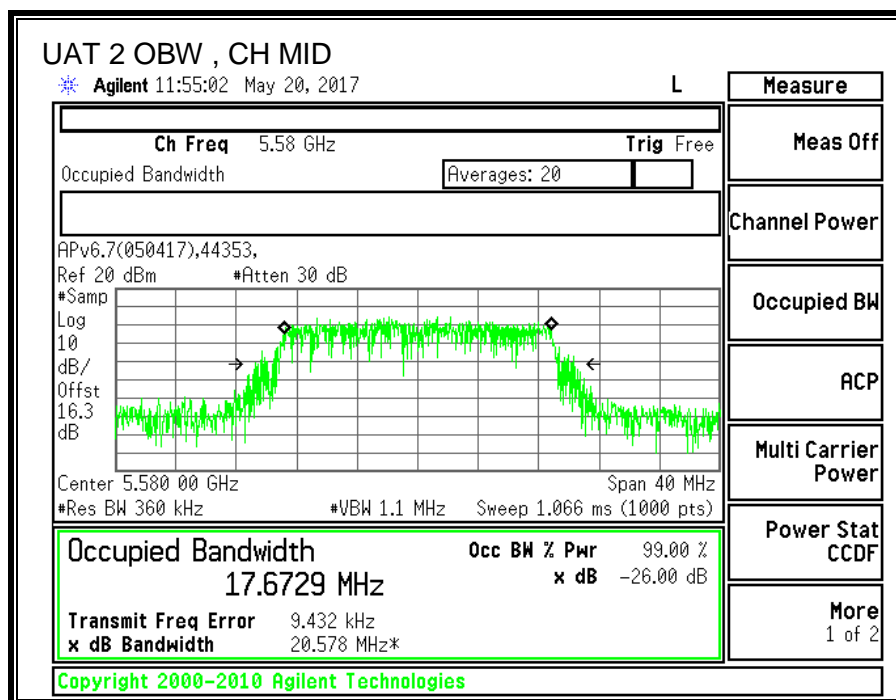

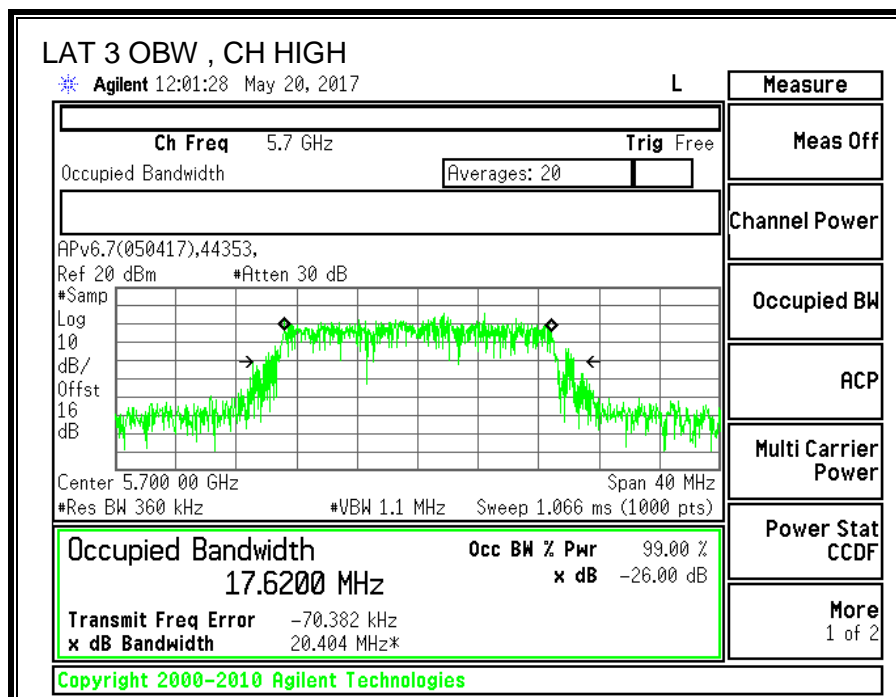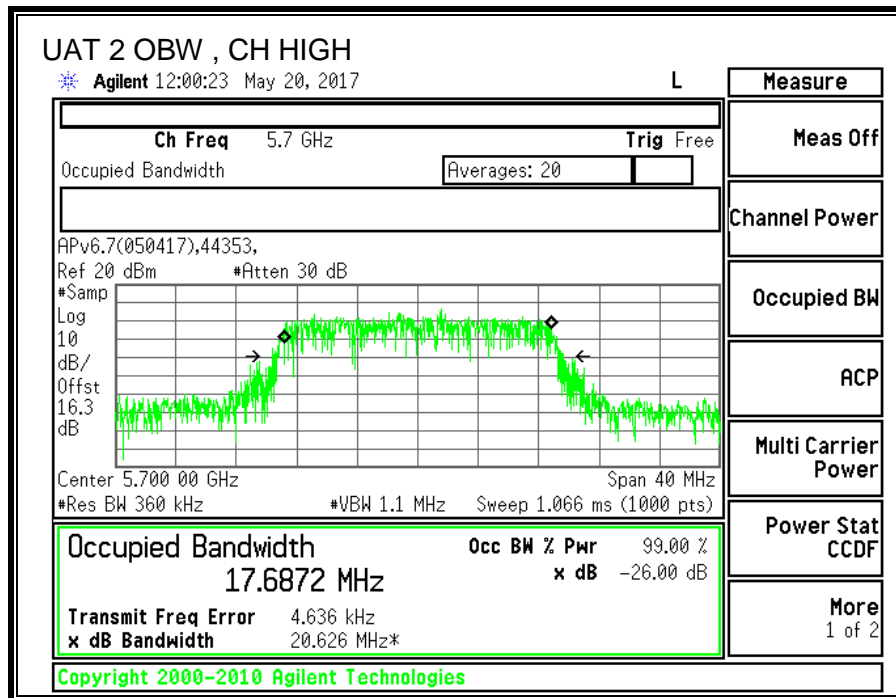

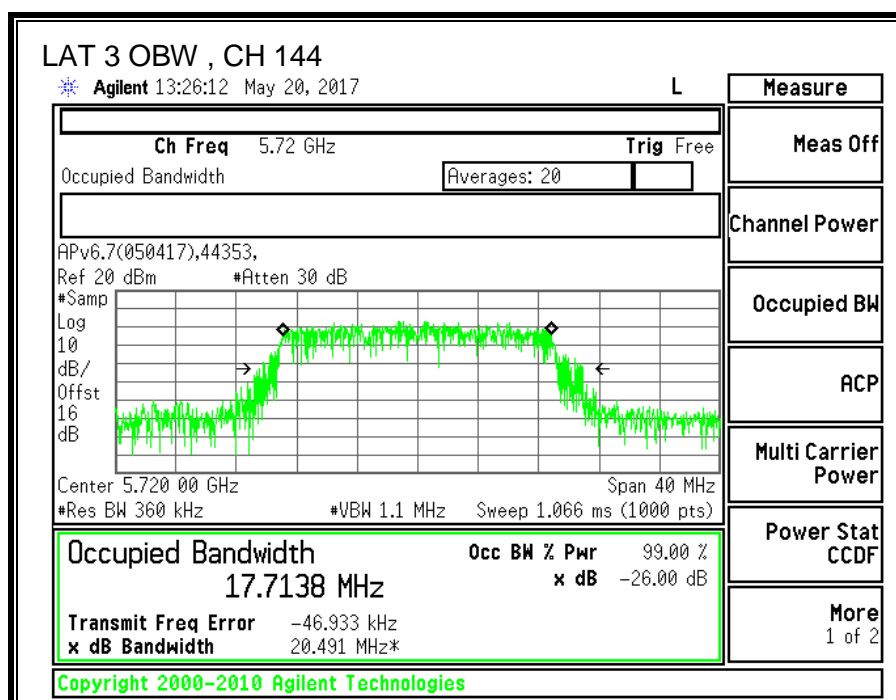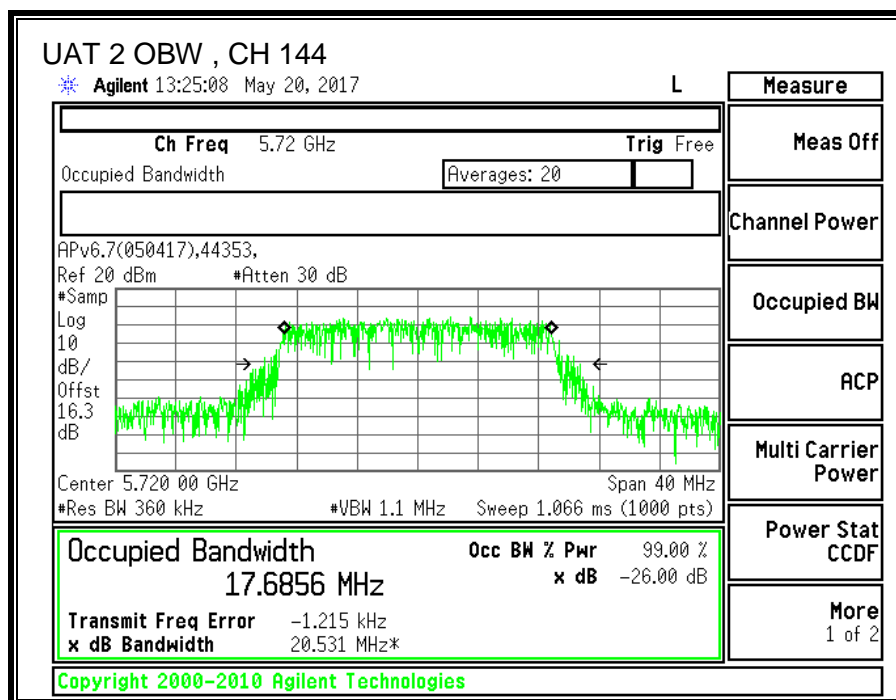

8.21.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Average Power Results

Channel	Frequency (MHz)	UAT 2 Power (dBm)	LAT 3 Power (dBm)	Total Power (dBm)
Low	5500	17.83	17.91	20.88
Mid	5580	17.93	17.87	20.91
High	5700	17.86	17.79	20.84
144	5720	17.88	17.82	20.86

8.21.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04, Section F (Method SA-2).

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

For Power used uncorrelated gain: The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-2.13	-7.97	-4.13

For PSD used correlated gain: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

UAT 2 Antenna Gain (dBi)	LAT 3 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-2.13	-7.97	-1.56

RESULTS

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5500	21.60	17.620	-4.13	-1.56	23.46	11.00
Mid	5580	21.65	17.668	-4.13	-1.56	23.47	11.00
High	5700	21.60	17.620	-4.13	-1.56	23.46	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results



Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	17.83	17.91	20.88	23.46	-2.58
Mid	5580	17.93	17.87	20.91	23.47	-2.56
High	5700	17.86	17.79	20.84	23.46	-2.62

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5500	8.109	7.194	10.69	11.00	-0.31
Mid	5580	7.454	7.375	10.42	11.00	-0.58
High	5700	7.661	7.675	10.68	11.00	-0.32

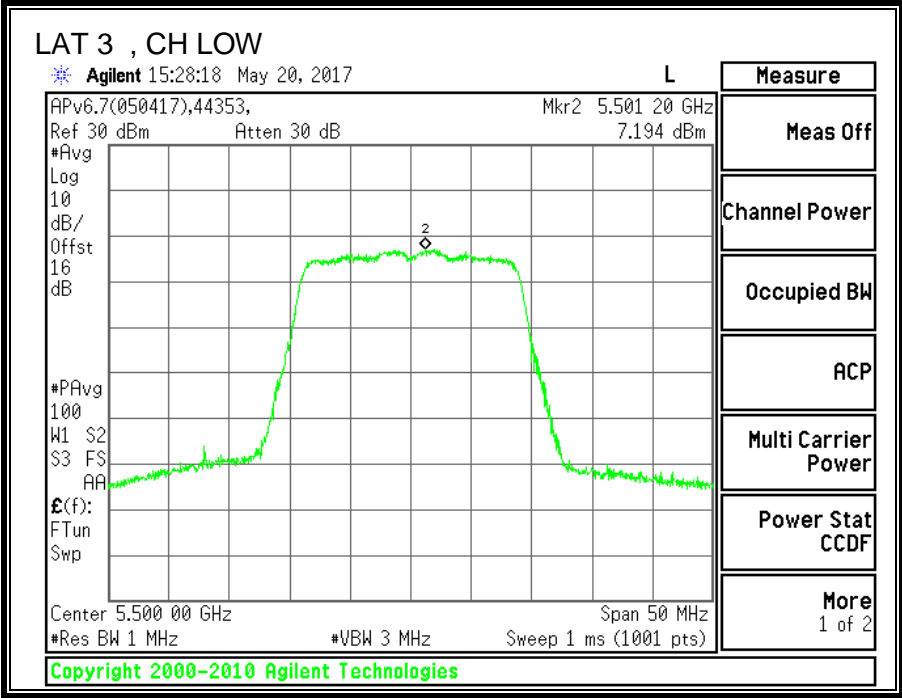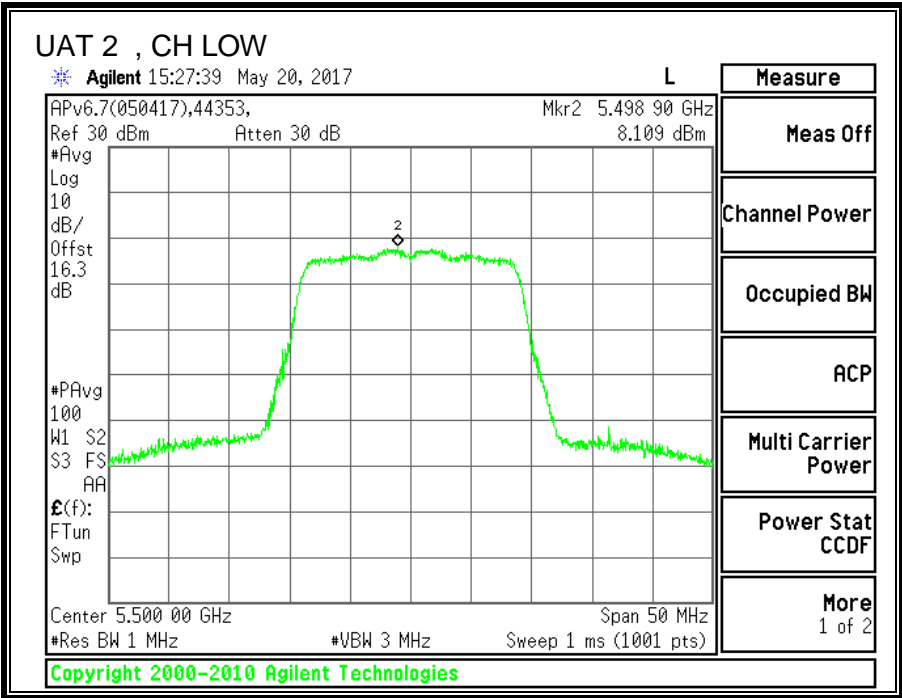

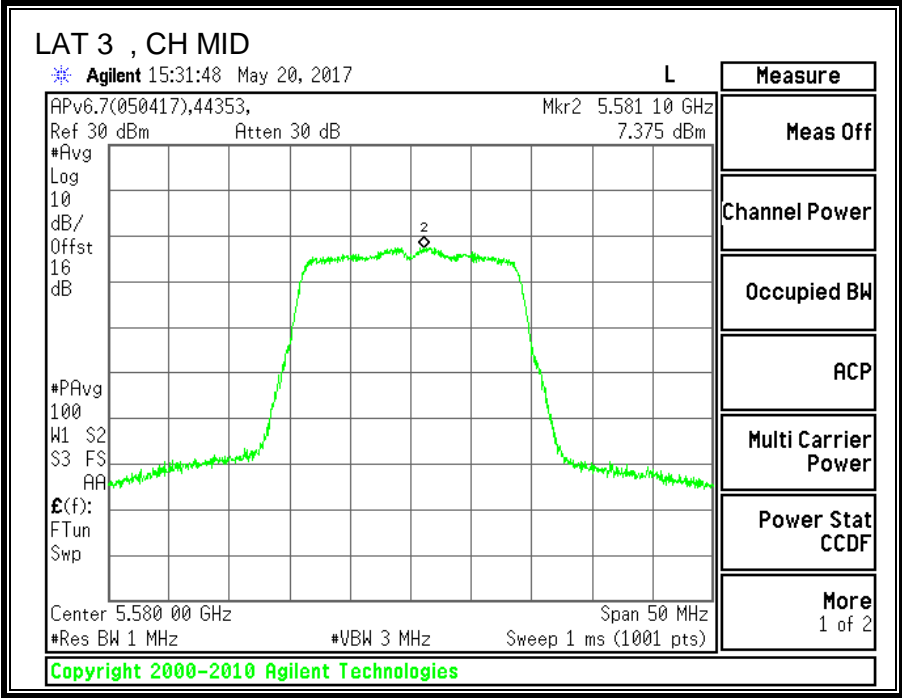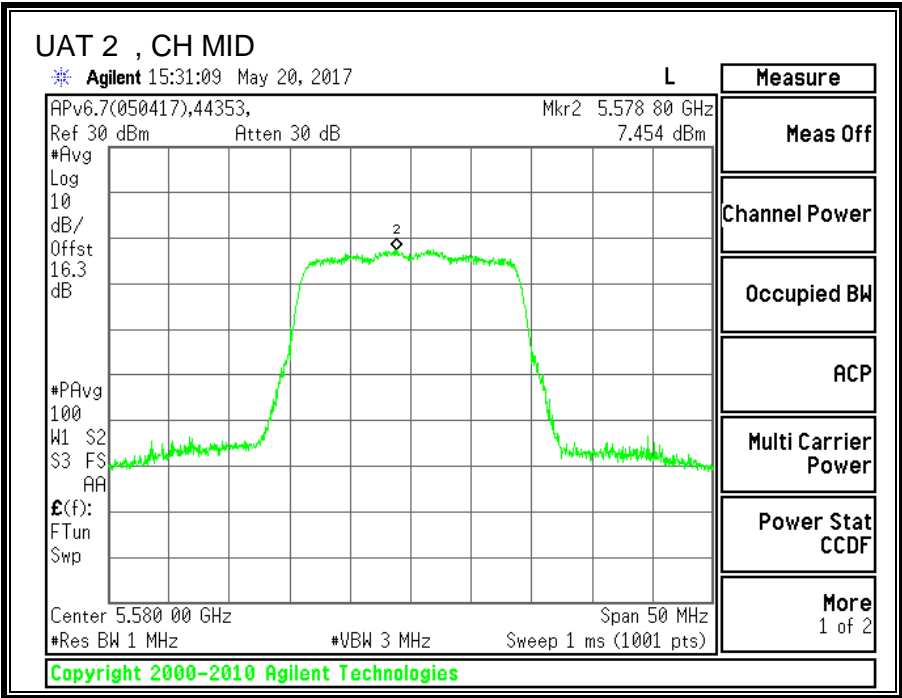

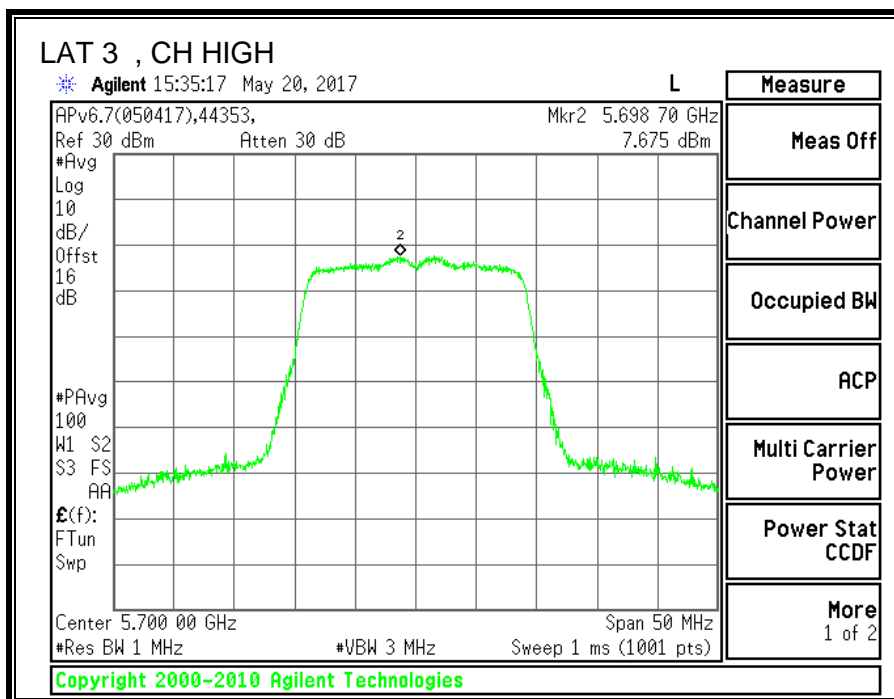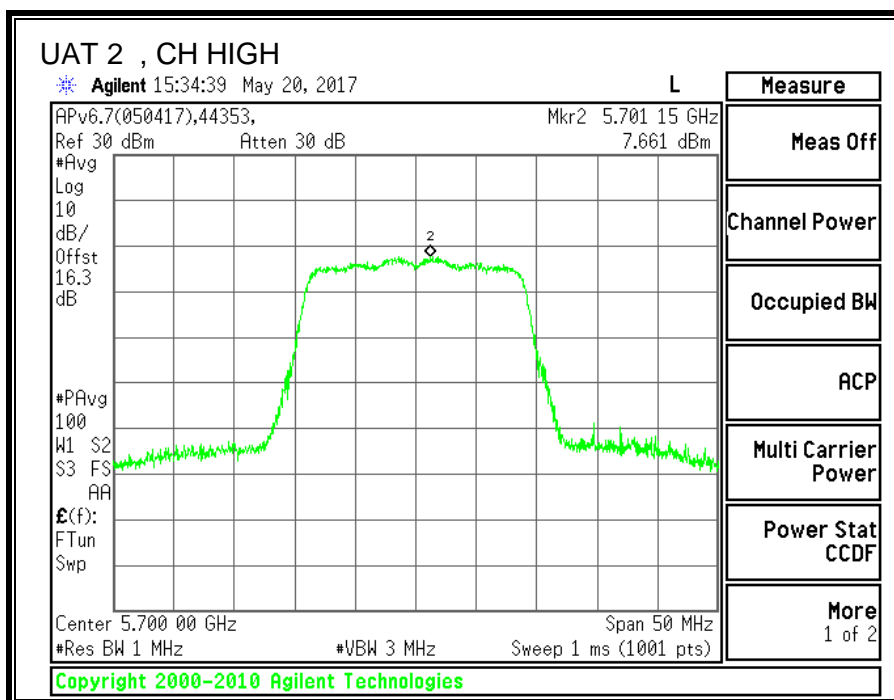

8.21.5. 11ac HT20 2TX CDD MIMO STRADDLE CHANNEL 144

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	21.55	-4.13	-1.56	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results


Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	17.06	16.77	19.93	24.00	-4.07


PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	7.47	7.54	10.51	11.00	-0.49

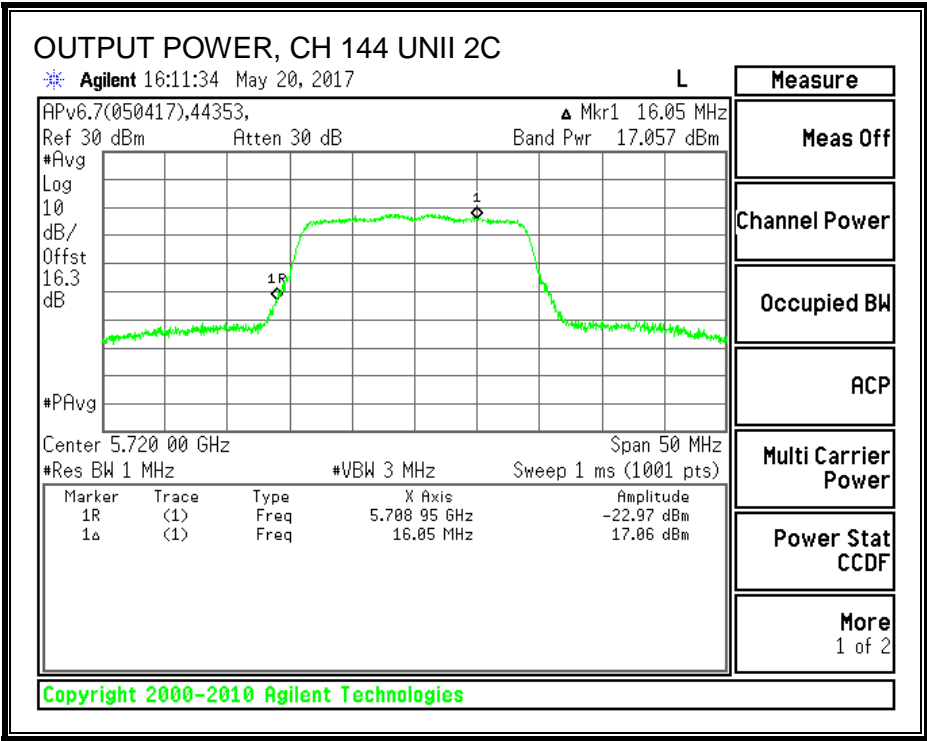


OUTPUT POWER, LAT 3

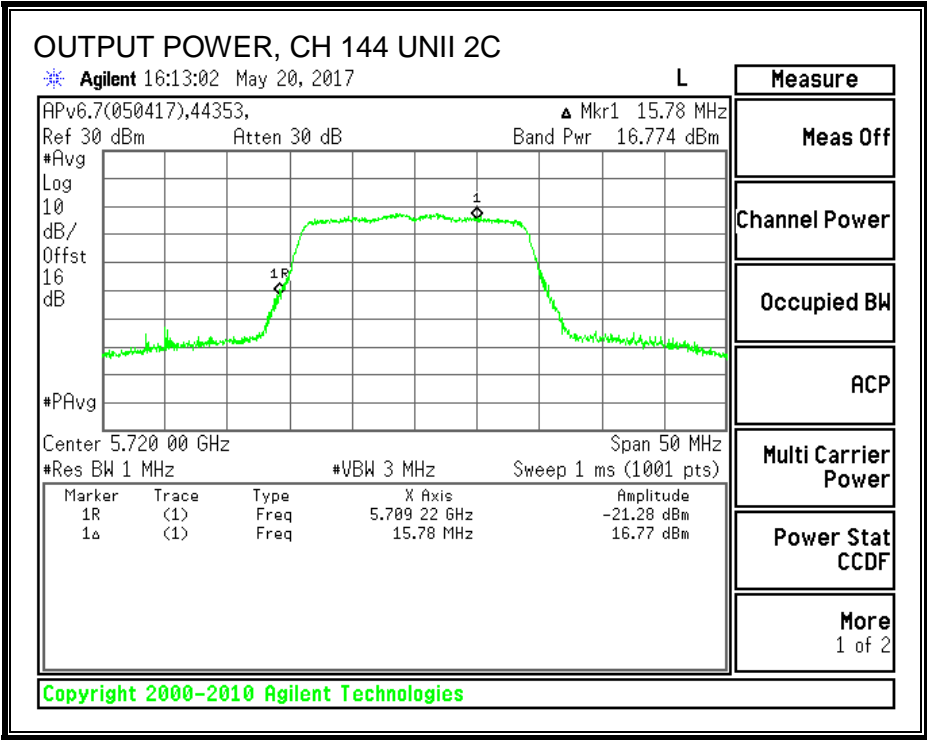

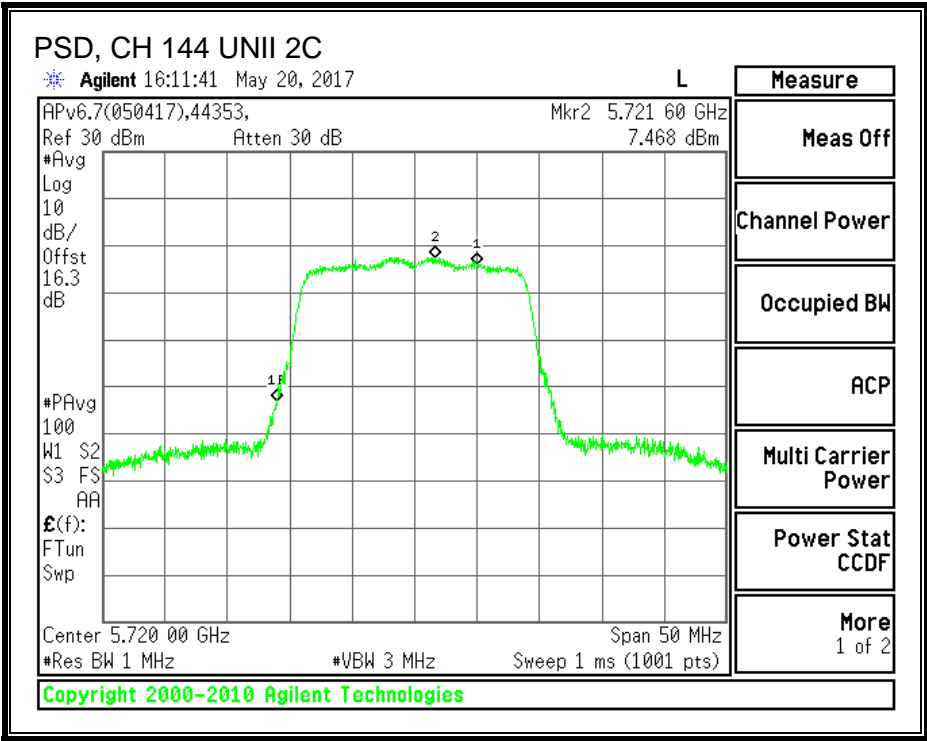

PSD, LAT 3

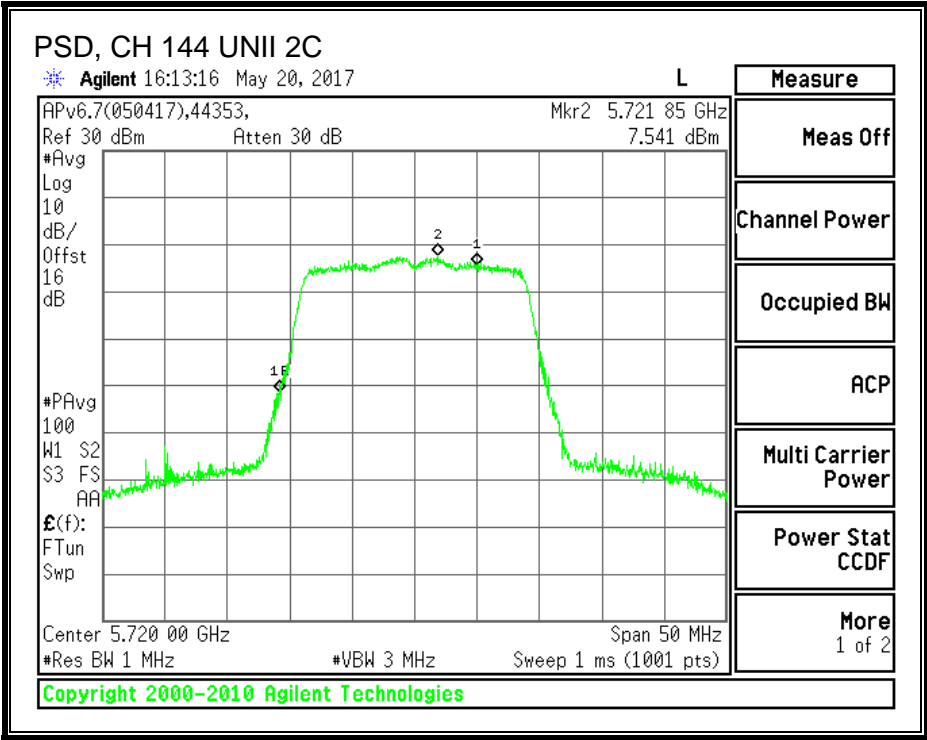

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	21.55	-4.52	-1.83	30.00	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	10.71	10.44	13.59	30.00	-16.41


PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	3.53	3.01	6.29	30.00	-23.71


OUTPUT POWER, UAT 2

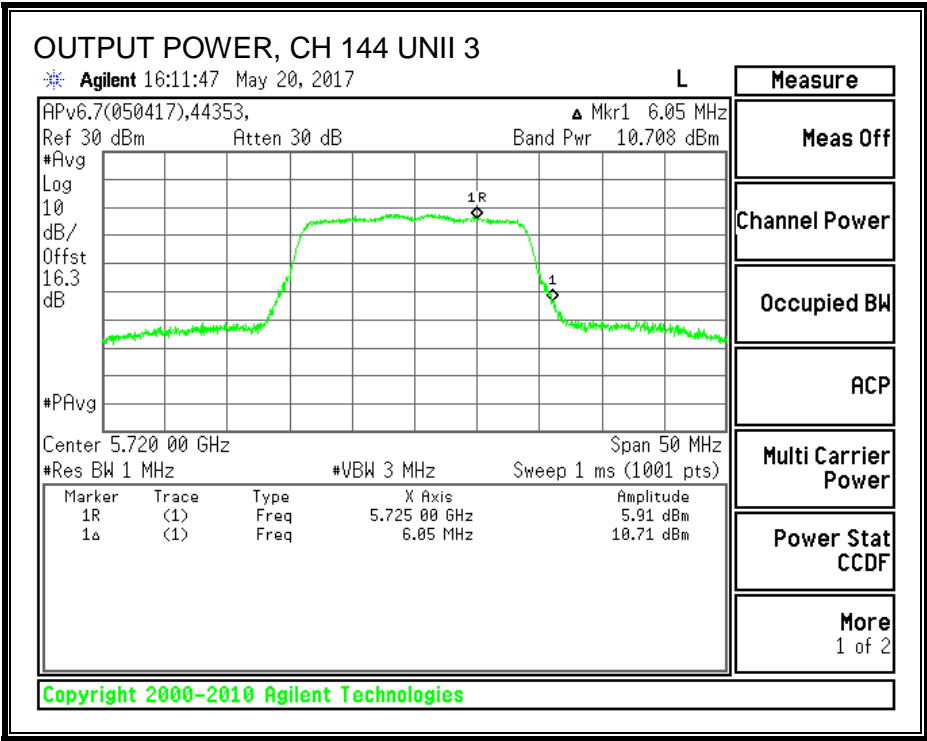


OUTPUT POWER, LAT 3

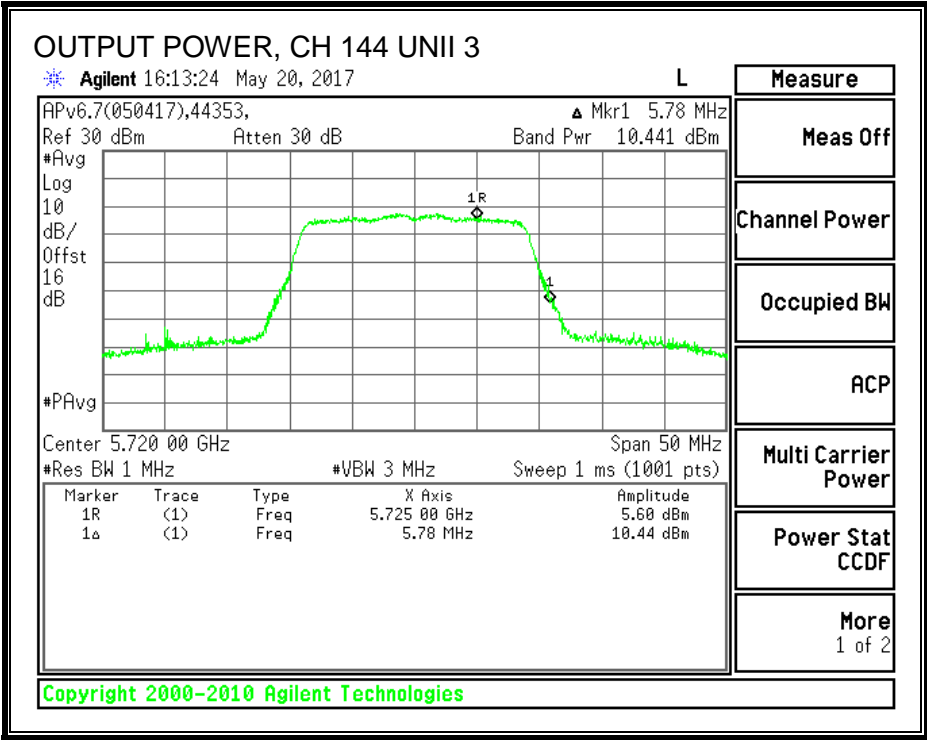

PSD, UAT 2

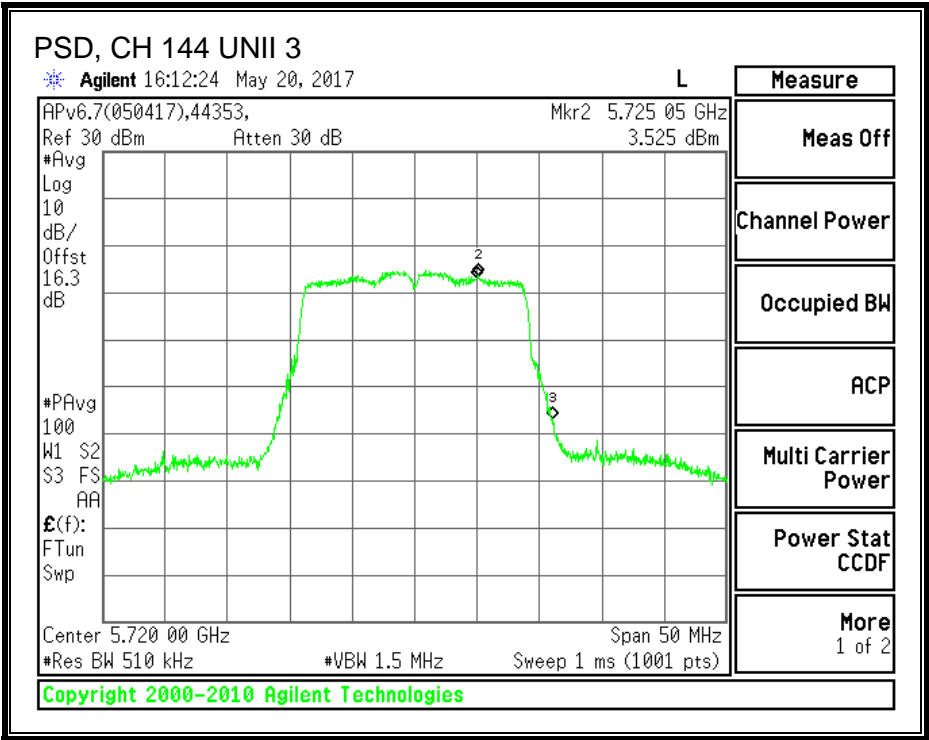

PSD, LAT 3

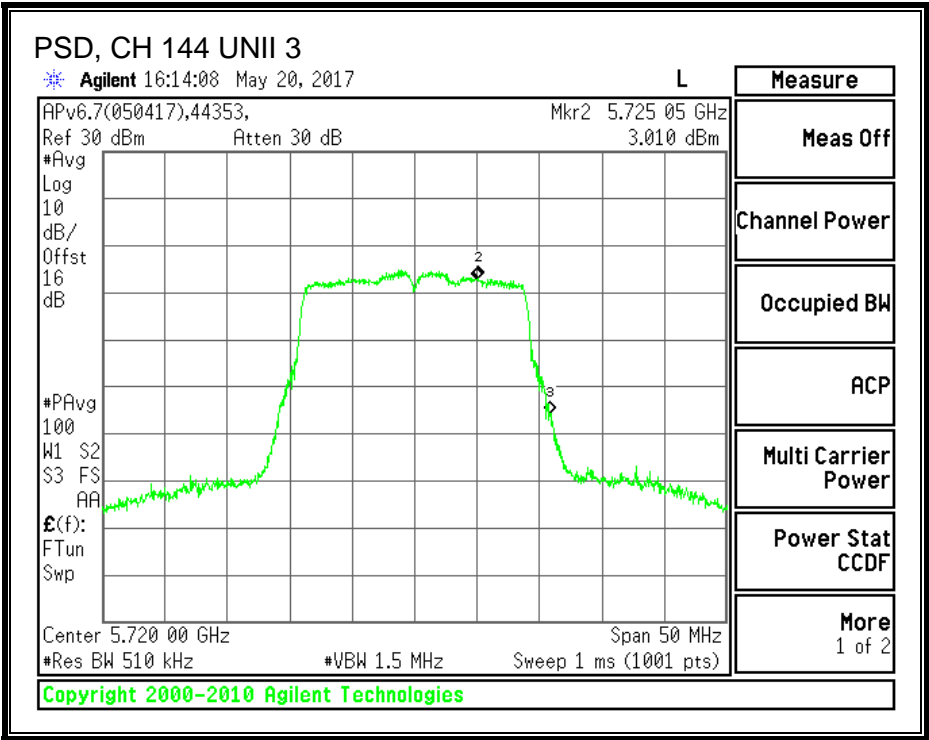

8.21.6. 6 dB BANDWIDTH


LIMITS

FCC §15.407 (e)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB BW UAT 2 (MHz)	6 dB BW LAT 3 (MHz)
144	5720	6.45	3.85

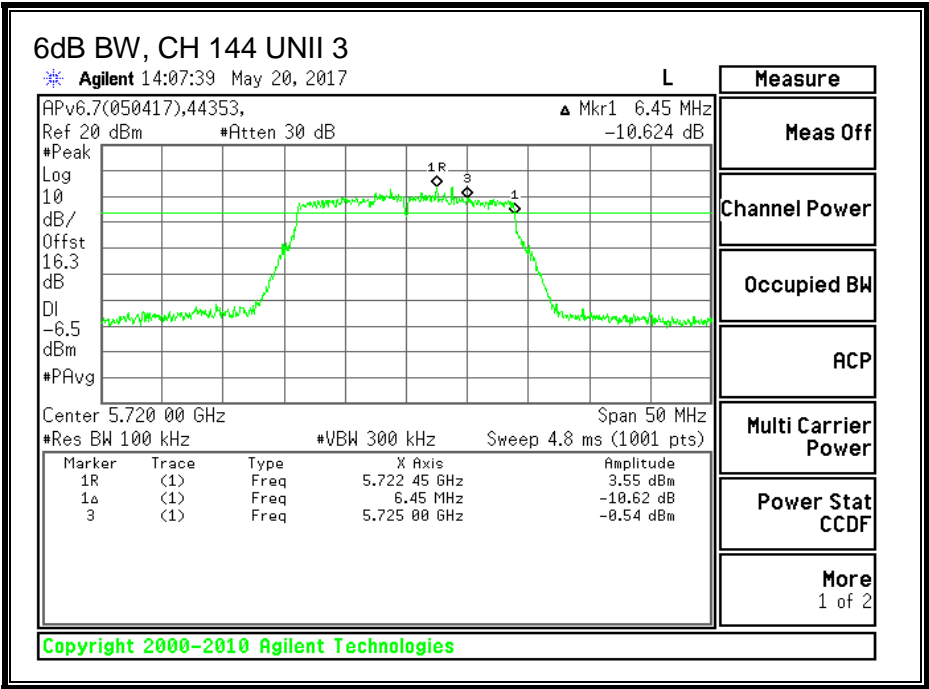

LAT 3

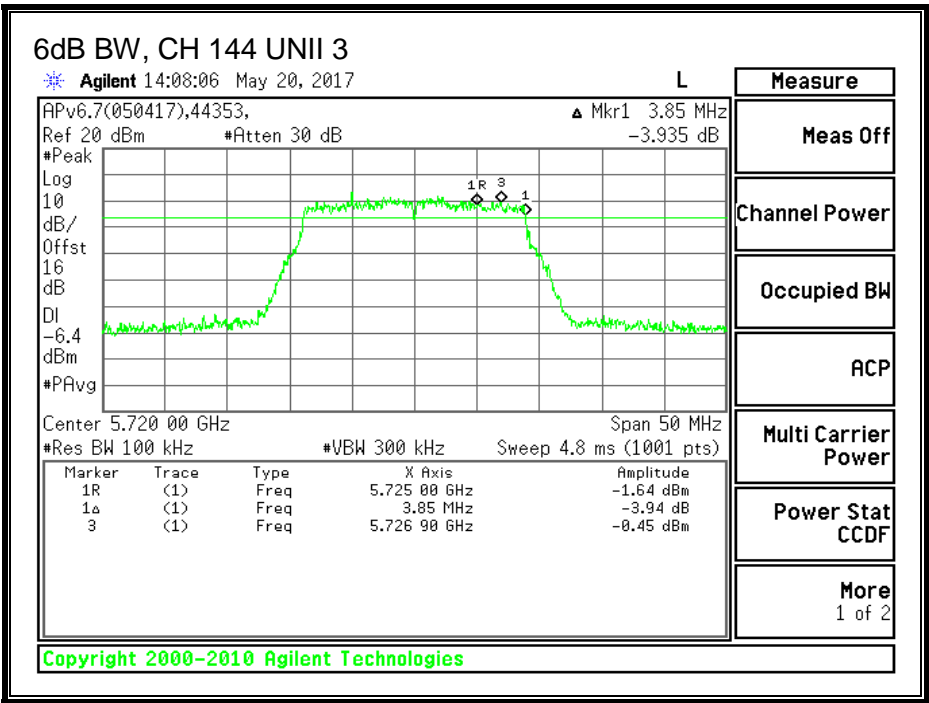

8.22. 11n HT40 UAT 2 SISO MODE IN THE 5.6GHz BAND



8.22.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW UAT 2 (MHz)
Low	5510	40.7
Mid	5550	40.6
High	5670	40.6
142	5710	40.7

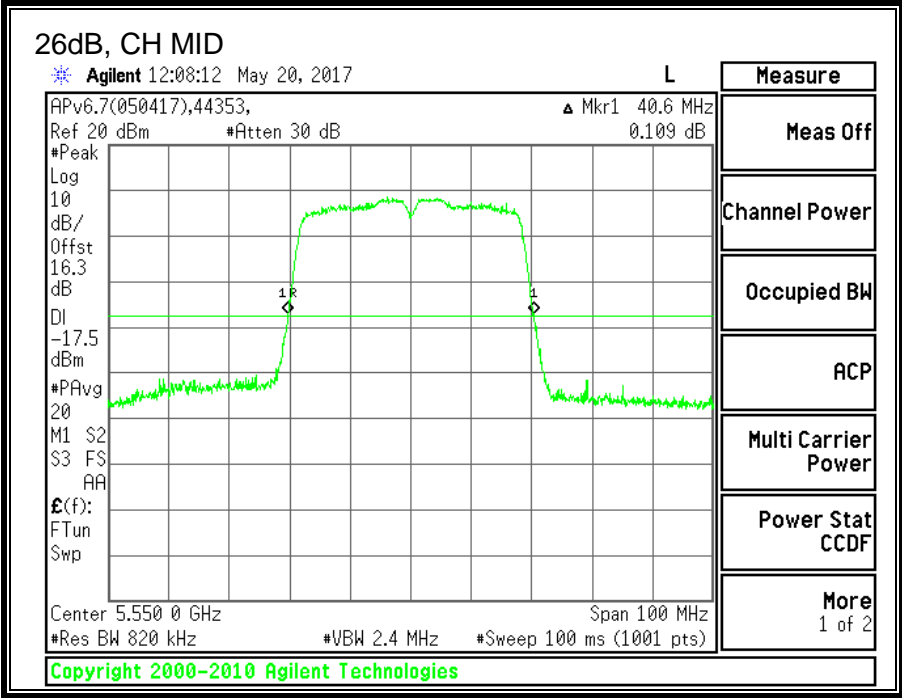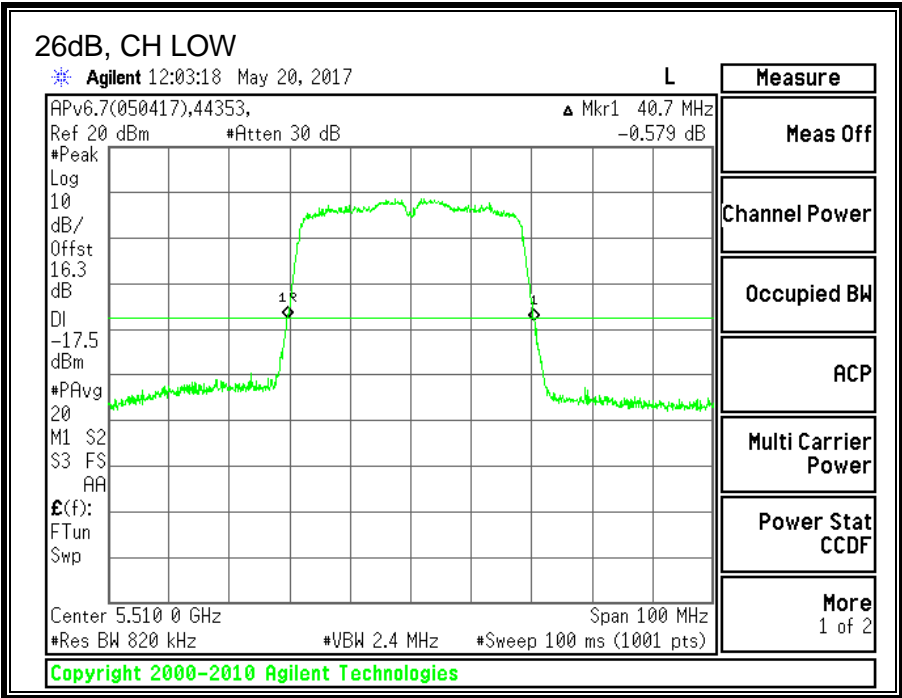

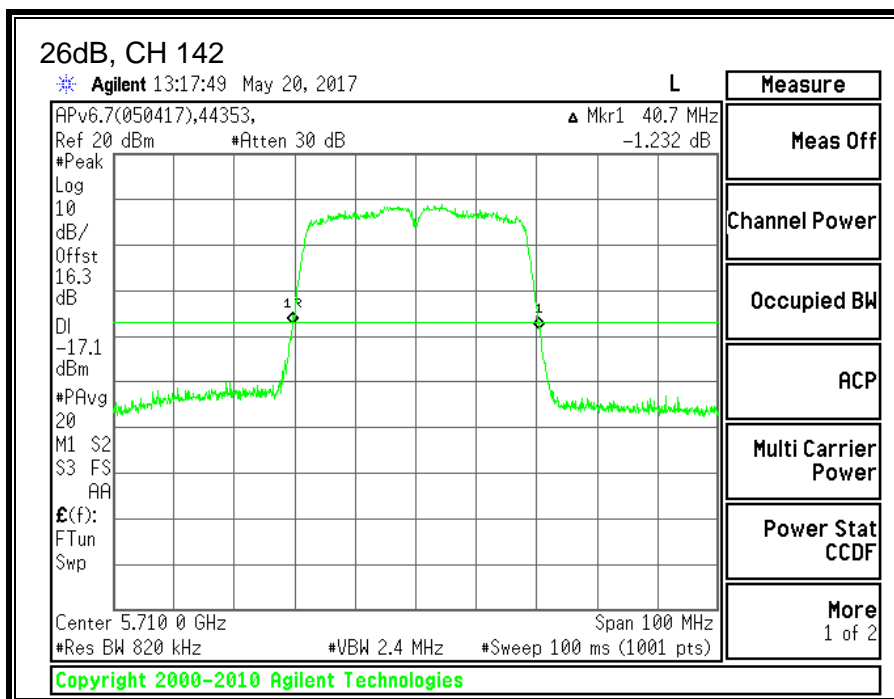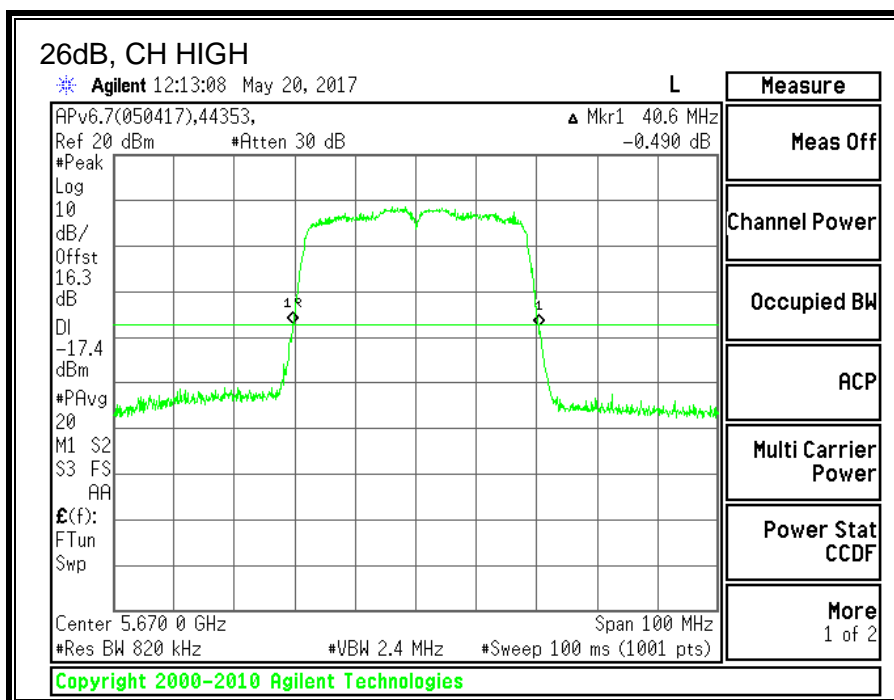



8.22.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW UAT 2 (MHz)
Low	5510	36.1752
Mid	5550	36.1179
High	5670	36.1274
142	5710	36.1637

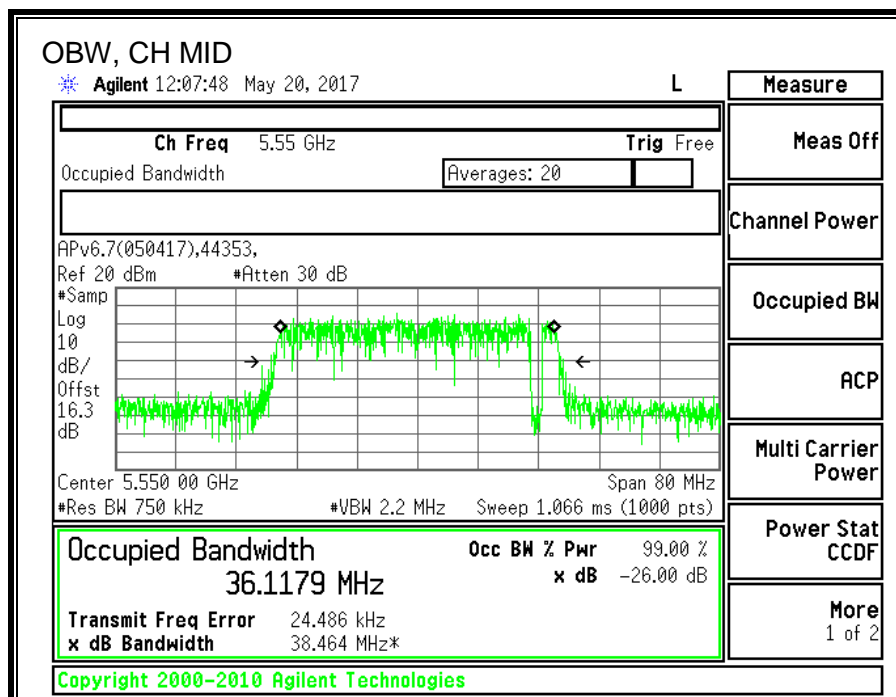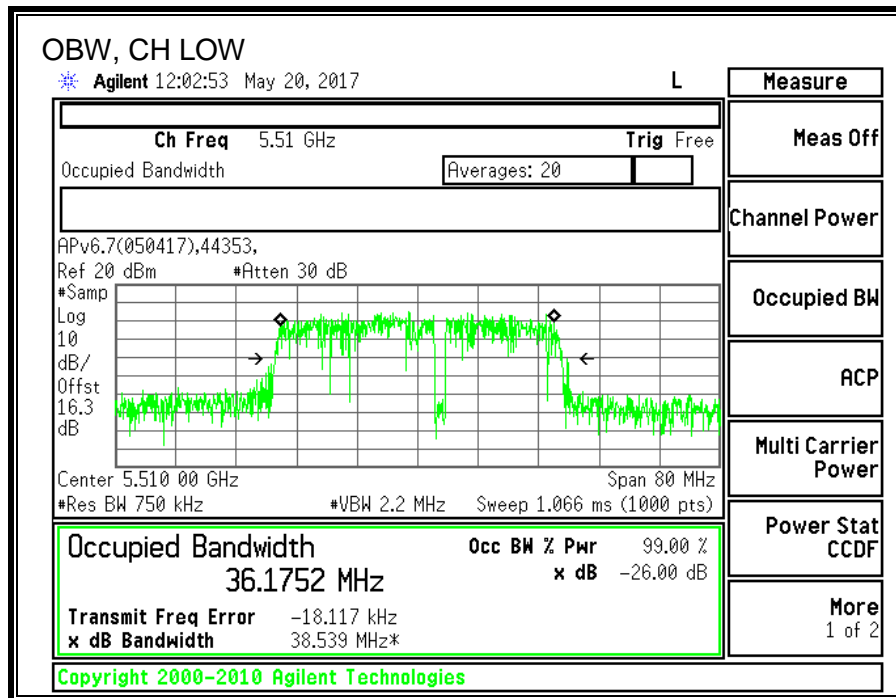

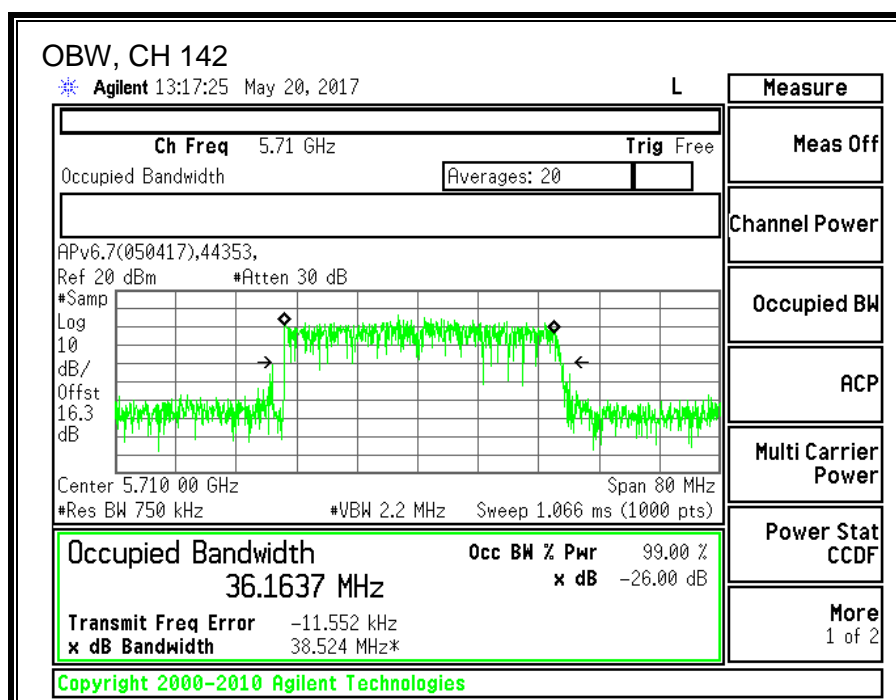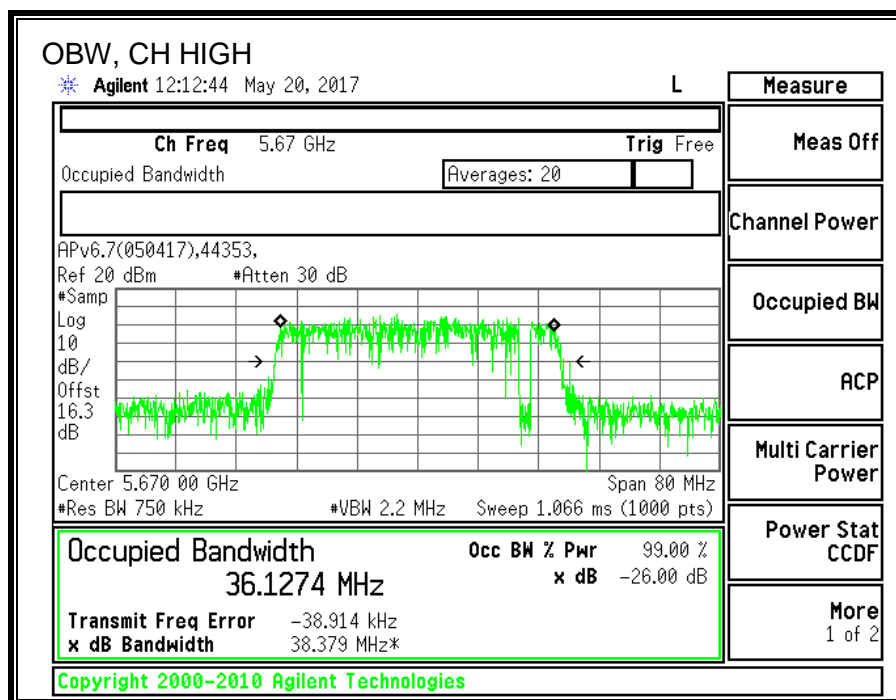

8.22.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power UAT 2 (dBm)
Low	5510	17.94
Mid	5550	19.42
High	5670	19.45
142	5710	19.37

8.22.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04, Section F (Method SA-2).

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	40.70	36.175	-2.13	24.00	11.00
Mid	5550	40.60	36.118	-2.13	24.00	11.00
High	5670	40.60	36.127	-2.13	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	17.94	17.94	24.00	-6.06
Mid	5550	19.42	19.42	24.00	-4.58
High	5670	19.45	19.45	24.00	-4.55

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	7.952	8.052	11.00	-2.95
Mid	5550	7.848	7.948	11.00	-3.05
High	5670	7.835	7.935	11.00	-3.07

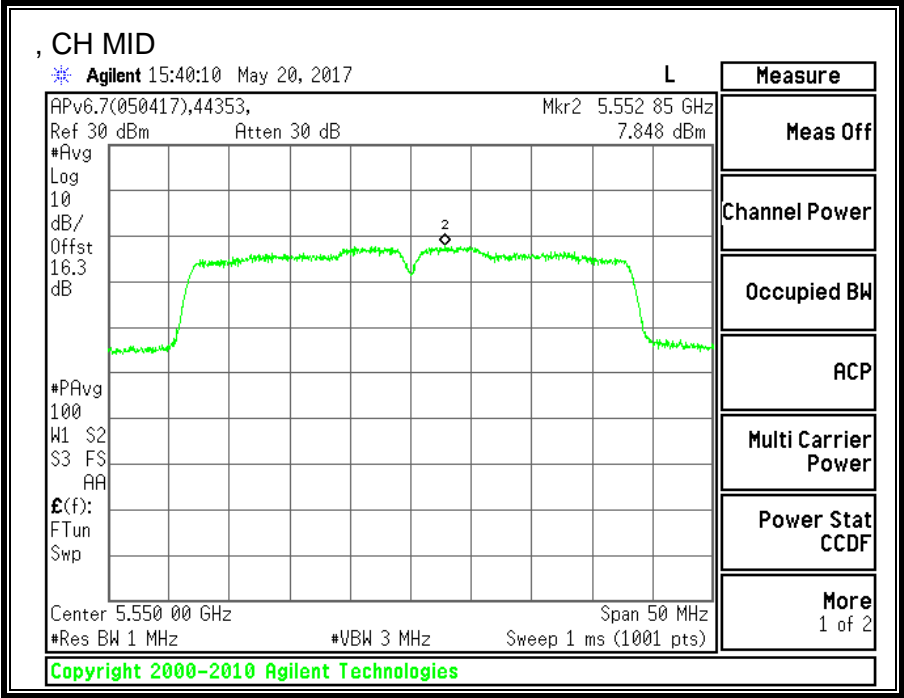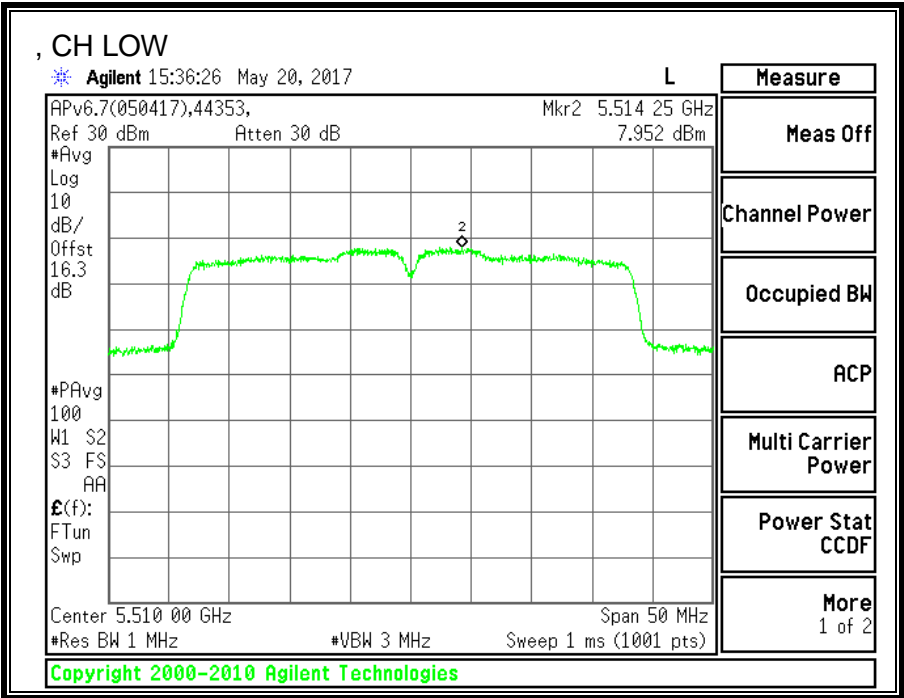

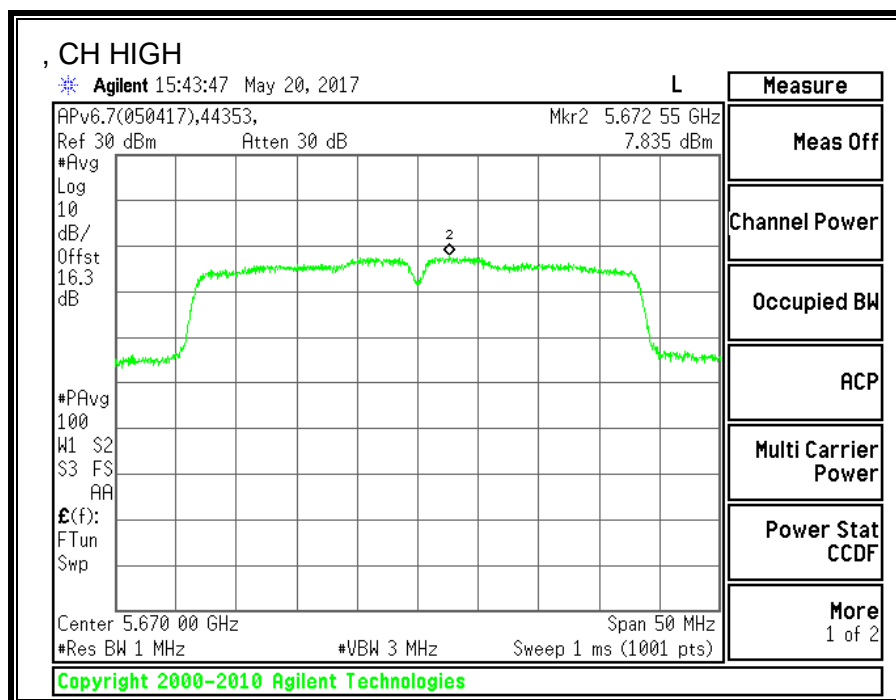

8.22.5. 11ac HT40 UAT 2 SISO STRADDLE CHANNEL 142

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	40.70	-2.13	-2.13	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	18.92	19.02	24.00	-4.98

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	6.02	6.12	11.00	-4.89

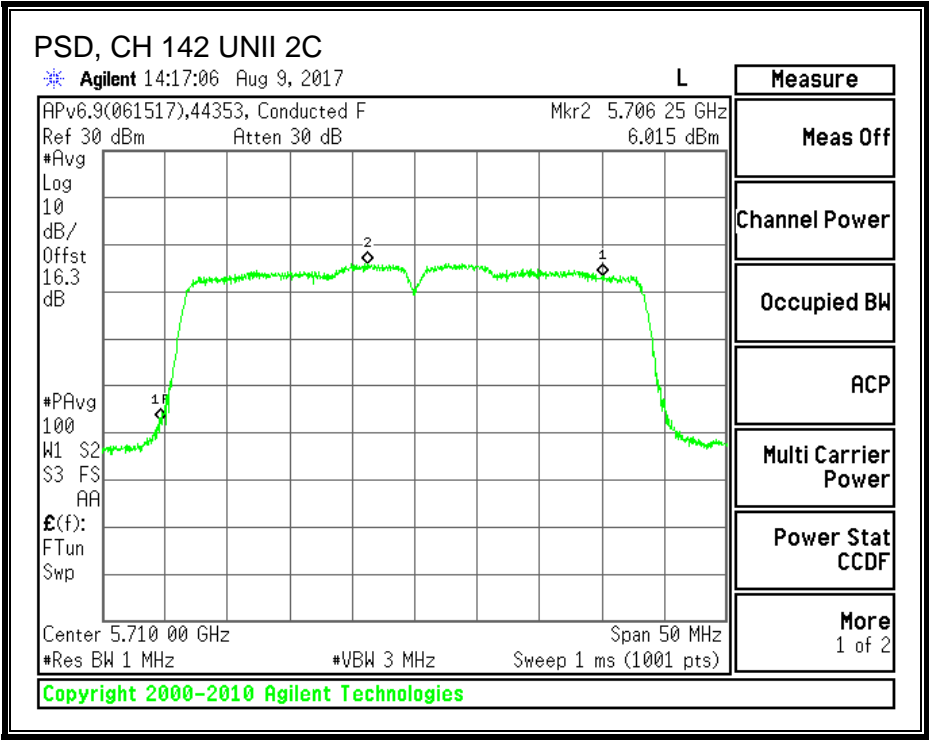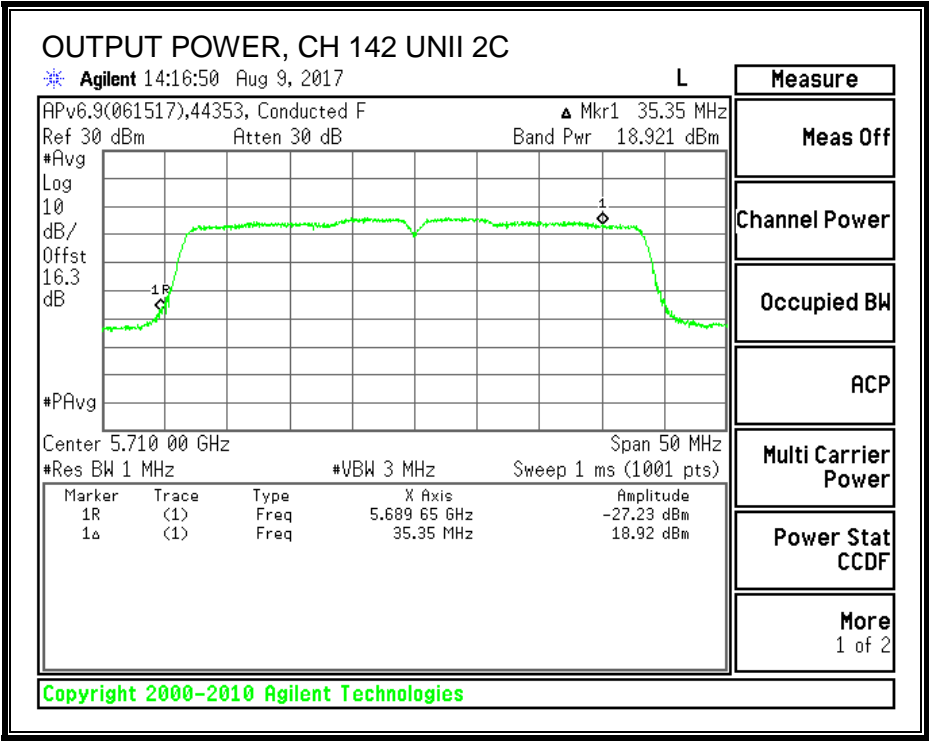

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	40.70	-2.71	30.00	30.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	UAT 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	7.62	7.72	30.00	-22.28

PSD Results

Channel	Frequency (MHz)	UAT 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	0.83	0.93	30.00	-29.07

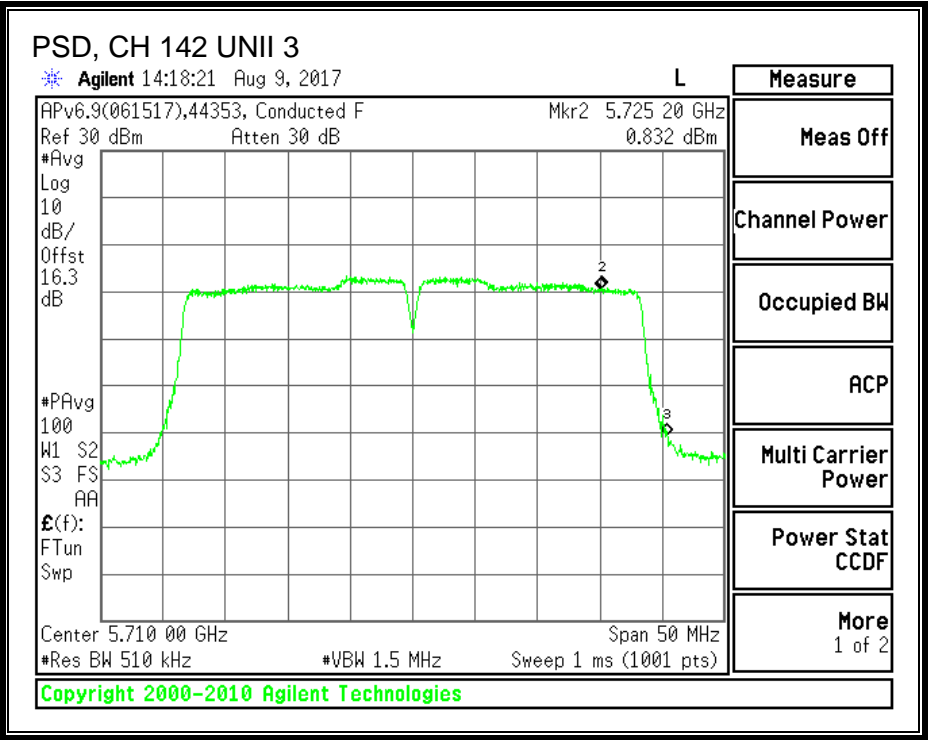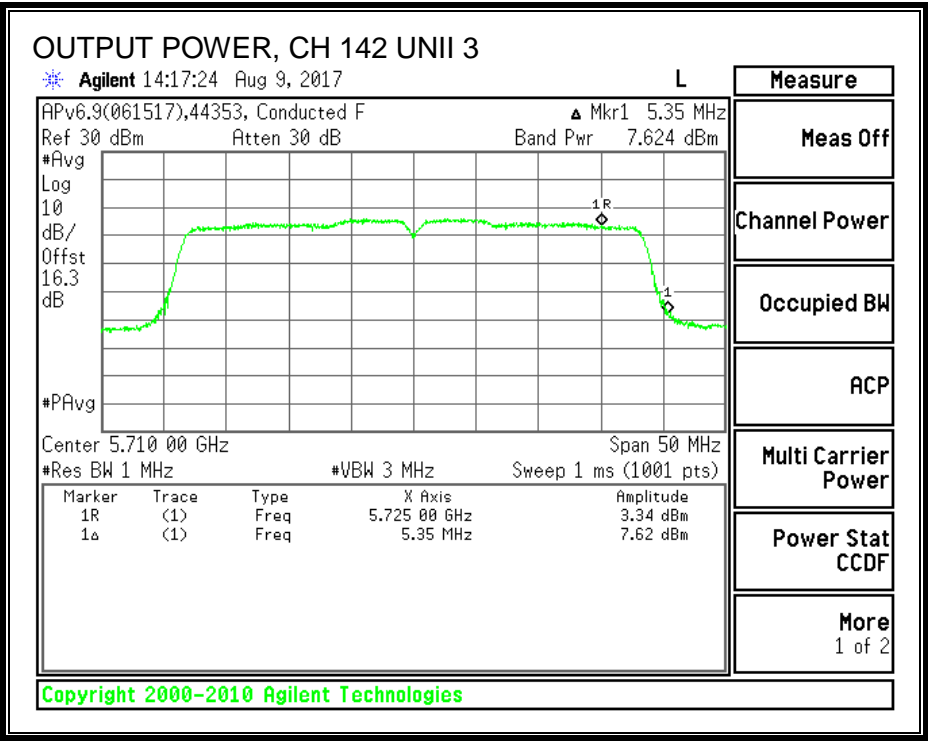

8.22.6. 6 dB BANDWIDTH


LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
142	5710	3.20

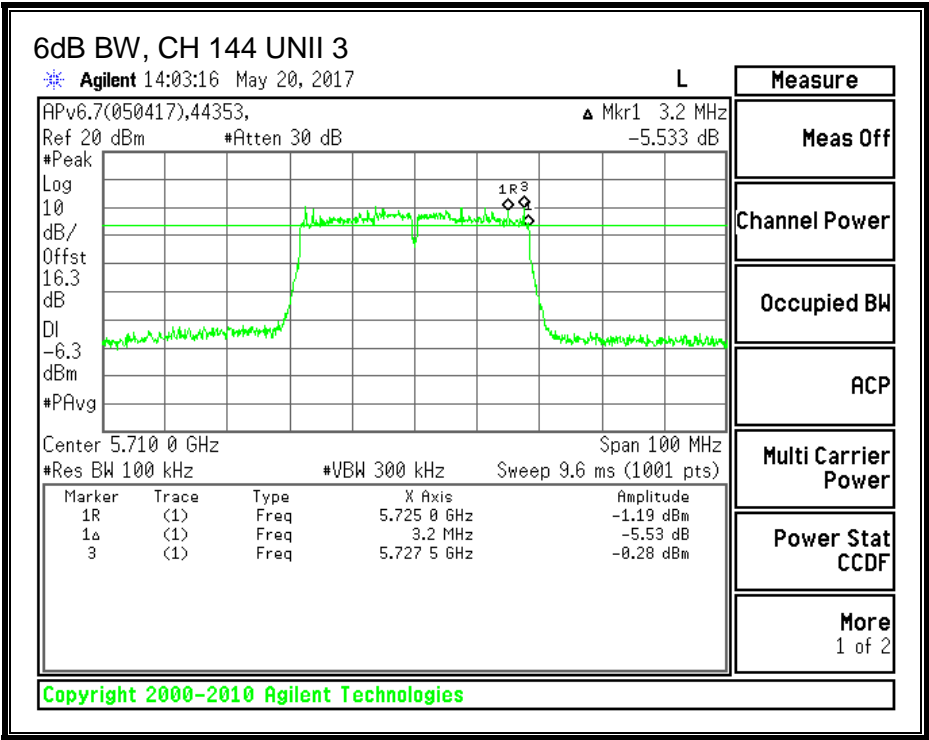

8.23. 11n HT40 LAT 3 SISO MODE IN THE 5.6GHz BAND



8.23.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	26 dB BW LAT 3 (MHz)
Low	5510	40.7
Mid	5550	40.6
High	5670	40.6
142	5710	40.5

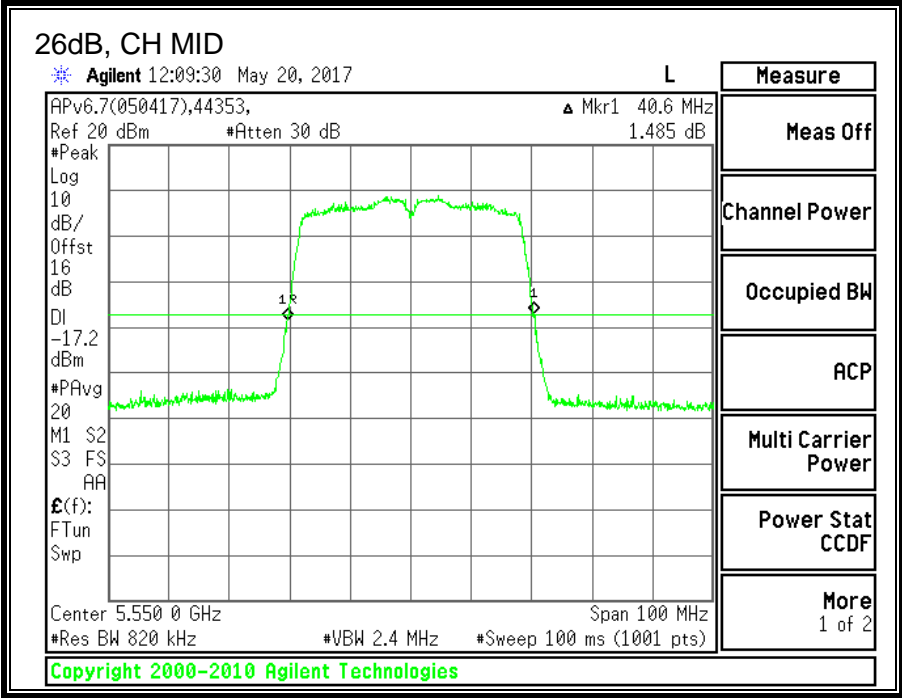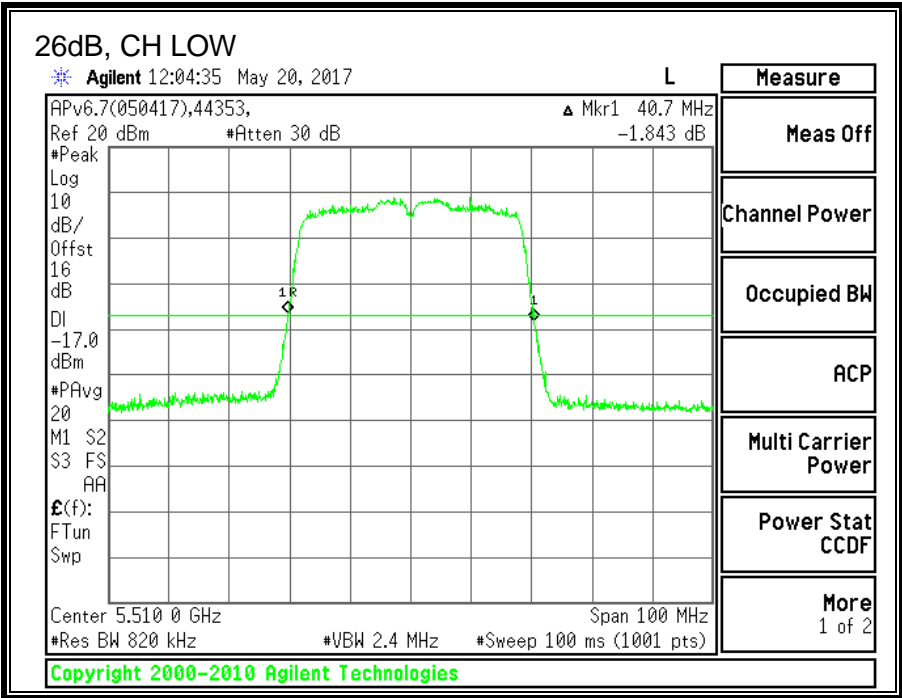

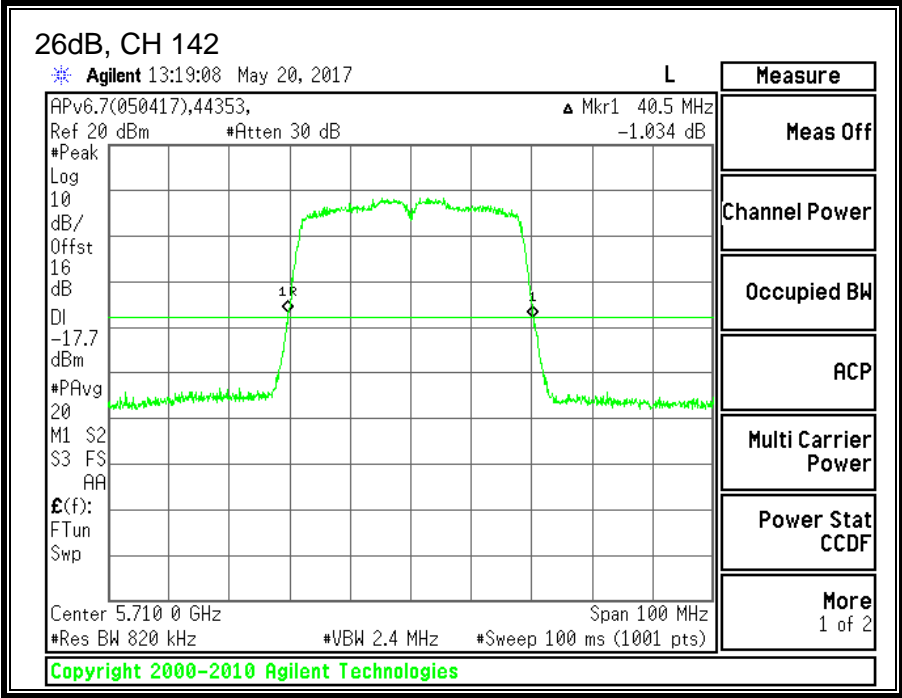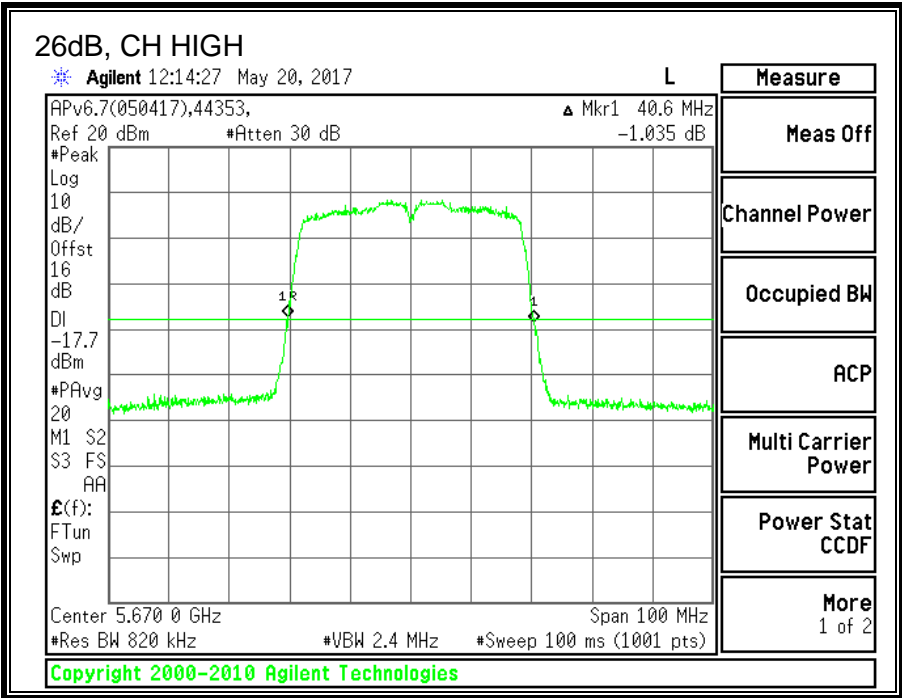



8.23.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency	99% BW LAT 3 (MHz)
Low	5510	36.0893
Mid	5550	36.1907
High	5670	36.1632
142	5710	36.1916

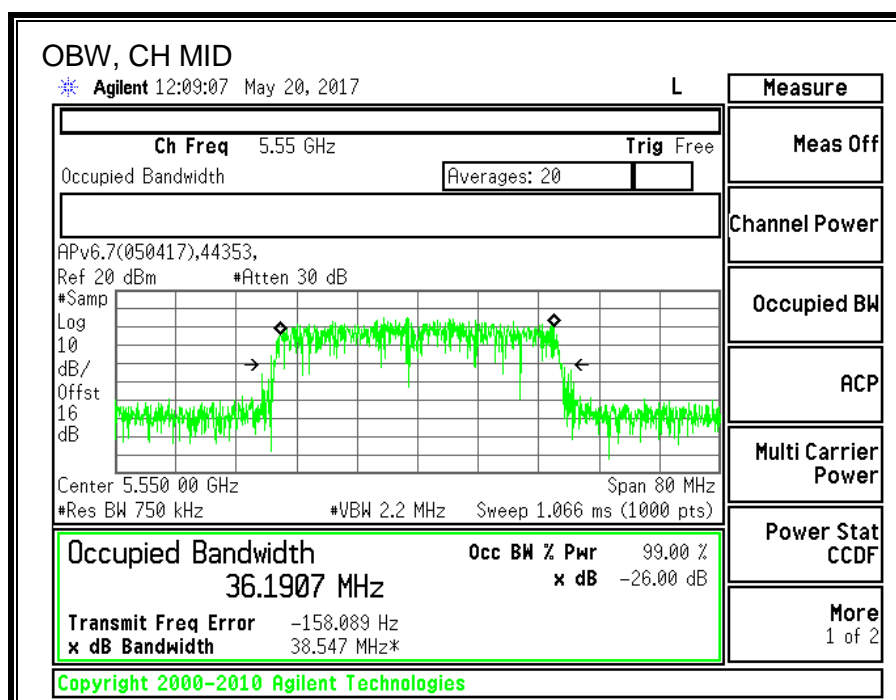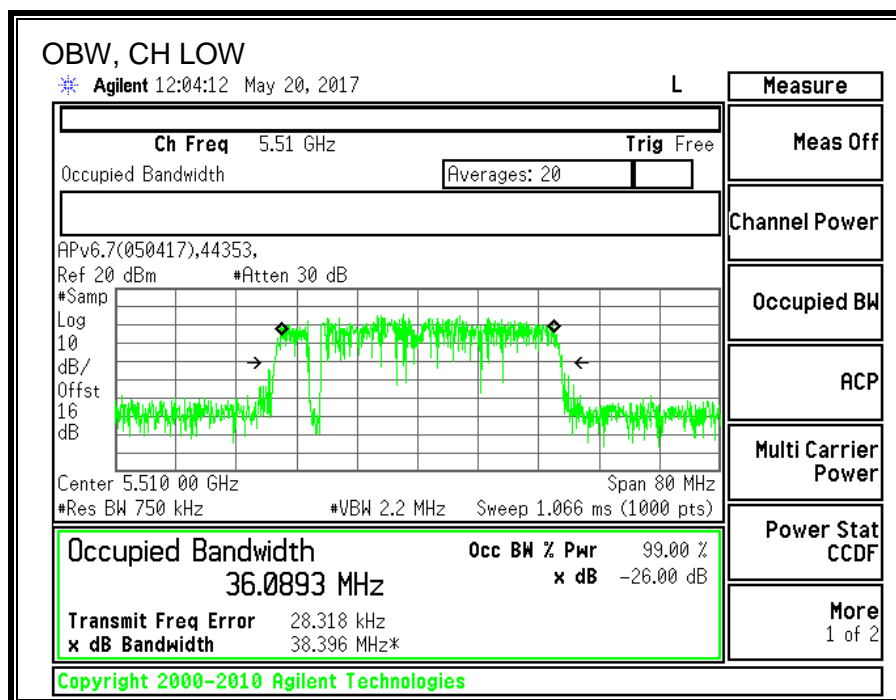

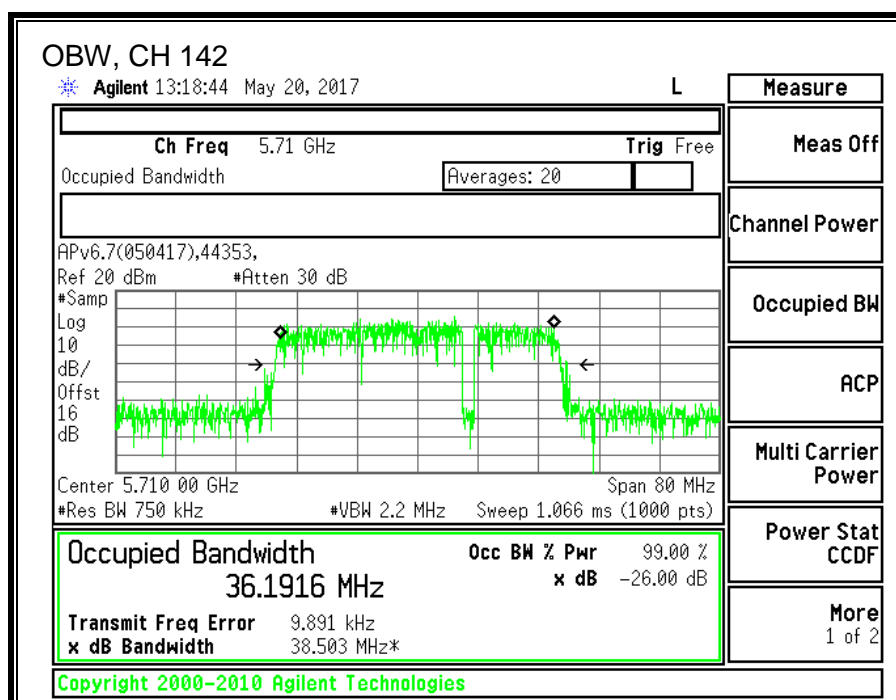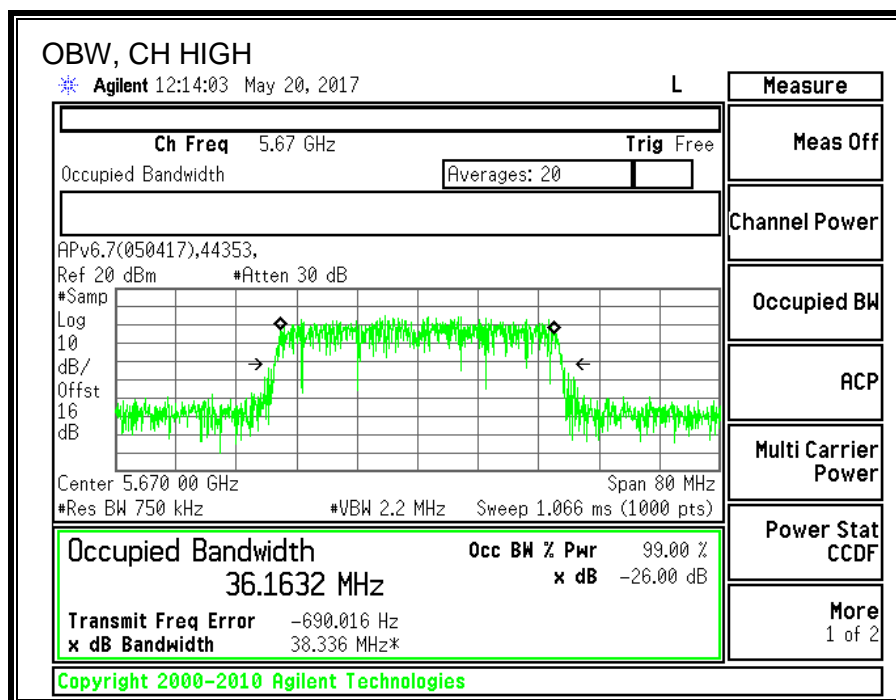

8.23.3. AVERAGE POWER

ID:	30554	Date:	08/04/2017
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency	Power LAT 3 (dBm)
Low	5510	17.91
Mid	5550	19.43
High	5670	19.48
142	5710	19.41

8.23.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

PSD test procedure: KDB 789033 D02 v01r04, Section F (Method SA-2).

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	40.70	36.09	-7.97	24.00	11.00
Mid	5550	40.60	36.19	-7.97	24.00	11.00
High	5670	40.60	36.16	-7.97	24.00	11.00


Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	17.91	17.91	24.00	-6.09
Mid	5550	19.43	19.43	24.00	-4.57
High	5670	19.48	19.48	24.00	-4.52

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	8.16	8.26	11.00	-2.74
Mid	5550	7.61	7.71	11.00	-3.29
High	5670	8.01	8.11	11.00	-2.89

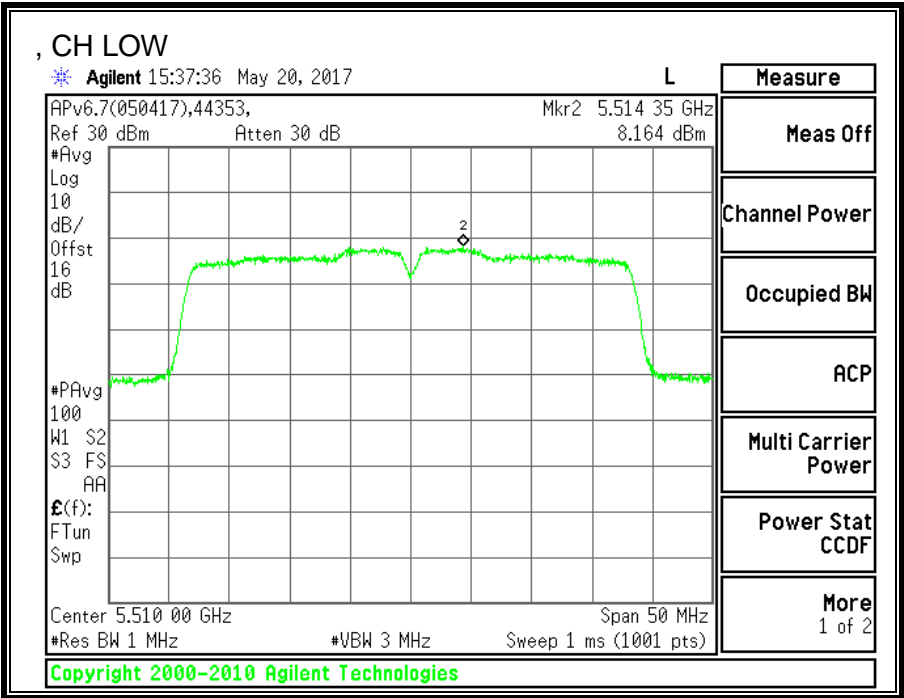

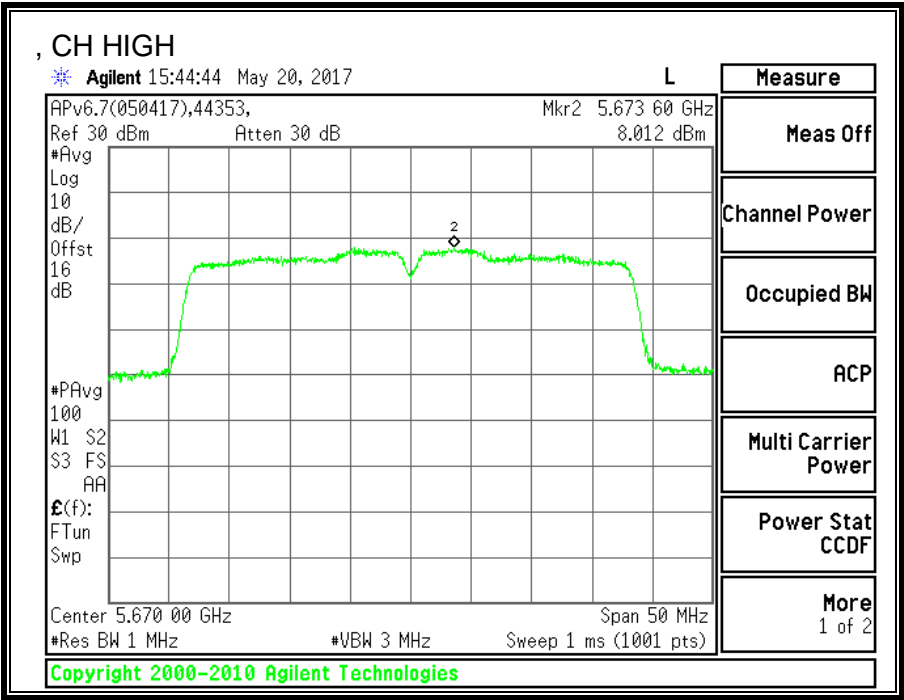

8.23.5. 11ac HT40 LAT 3 SISO STRADDLE CHANNEL 142

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	40.50	-7.97	-7.97	24.00	11.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	18.93	19.03	24.00	-4.97

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	6.16	6.26	11.00	-4.75

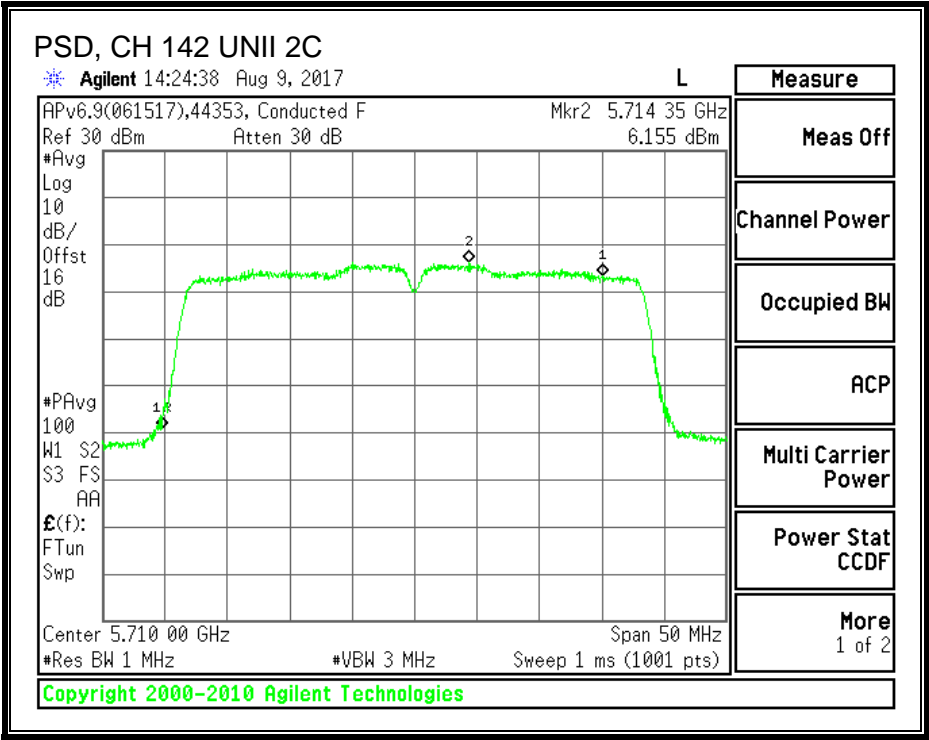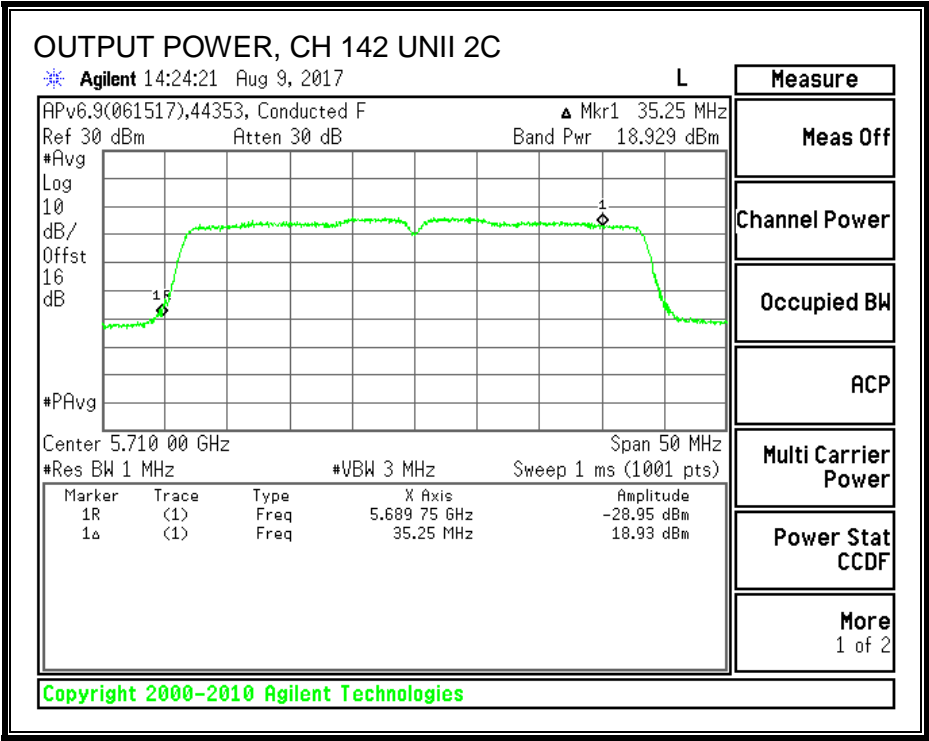

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	40.50	-7.67	30.00	30.00



Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	LAT 3 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	7.61	7.71	30.00	-22.29

PSD Results

Channel	Frequency (MHz)	LAT 3 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	0.79	0.89	30.00	-29.11

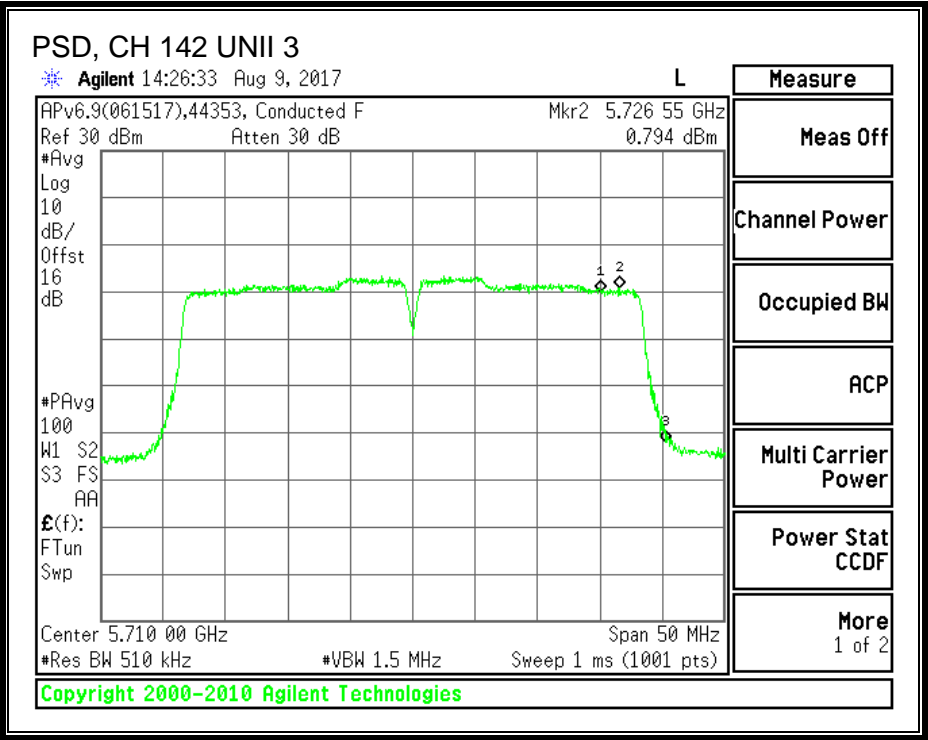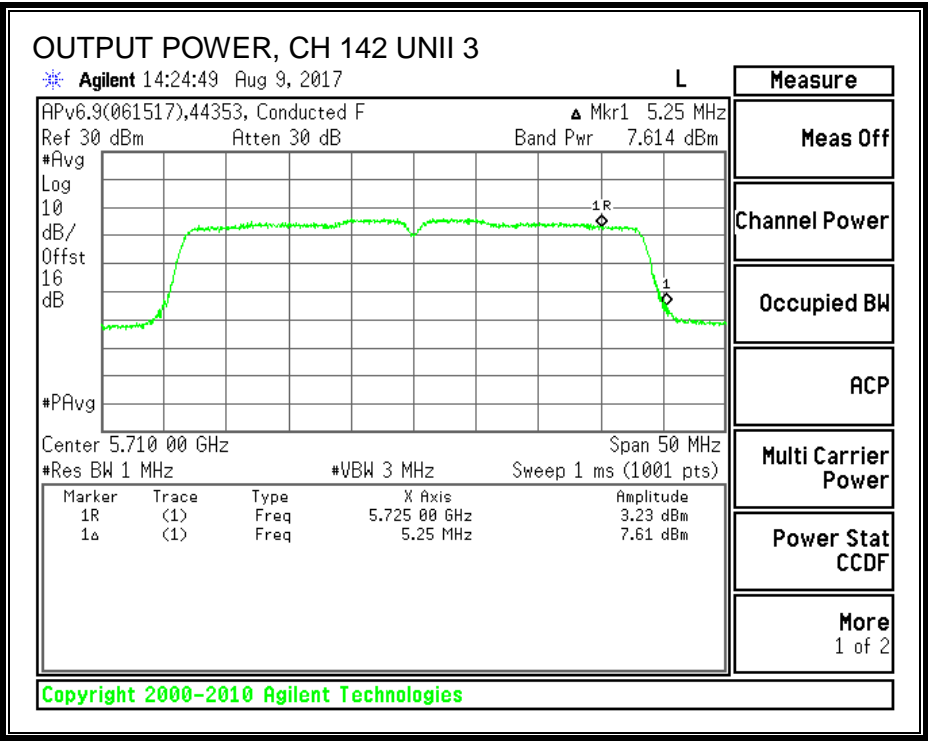

8.23.6. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
142	5710	3.30

