



Test Report

C9120AXP-x & C9120AXP-EWC-x (x=B)

Cisco Catalyst C9120AX Series 802.11ax Access Point

XOR 5GHz Radio + 13dBi Antenna

FCC ID: LDKROFSN2177

5250-5350 MHz

Against the following Specifications:

CFR47 Part 15.407



Cisco Systems

170 West Tasman Drive

San Jose, CA 95134

	
Author: Chris Blair Tested By: Chris Blair	Approved By: Gez Thorpe Title: Radio Compliance Manager Revision: See EDCS

This report replaces any previously entered test report under EDCS – **18315848**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system. Test Report Template EDCS# 11644123.



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW	3
SECTION 2: ASSESSMENT INFORMATION	4
2.1 GENERAL	4
2.2 DATE OF TESTING.....	6
2.3 REPORT ISSUE DATE	6
2.4 TESTING FACILITIES	6
2.5 EQUIPMENT ASSESSED (EUT).....	7
2.6 EUT DESCRIPTION	7
SECTION 3: RESULT SUMMARY	13
3.1 RESULTS SUMMARY TABLE	13
SECTION 4: SAMPLE DETAILS.....	15
4.1 SAMPLE DETAILS	15
4.2 SYSTEM DETAILS	15
4.3 MODE OF OPERATION DETAILS	15
APPENDIX A: EMISSION TEST RESULTS	16
CONDUCTED TEST SETUP DIAGRAM.....	16
TARGET MAXIMUM CHANNEL POWER	16
A.1 DUTY CYCLE	18
A.2 99% AND 26DB BANDWIDTH	21
A.3 MAXIMUM CONDUCTED OUTPUT POWER	25
A.4 POWER SPECTRAL DENSITY	37
A.5 CONDUCTED SPURIOUS EMISSIONS	49
A.6 CONDUCTED RECEIVER SPURIOUS EMISSIONS	72
A.7 CONDUCTED BANDEDGE.....	77
APPENDIX B: RADIATED & AC CONDUCTED EMISSIONS TEST RESULTS	93
APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST	94
APPENDIX D: ABBREVIATION KEY AND DEFINITIONS.....	95
APPENDIX E: PHOTOGRAPHS OF TEST SETUPS	96
APPENDIX F: SOFTWARE USED TO PERFORM TESTING	97
APPENDIX G: TEST PROCEDURES.....	97
APPENDIX H: SCOPE OF ACCREDITATION (A2LA CERTIFICATE NUMBER 1178-01).....	97
APPENDIX I: TEST ASSESSMENT PLAN	97



Section 1: Overview

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Specifications:
CFR47 Part 15.407

Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	$\pm 2.4 \cdot 10^{-7}$
temperature measurements	$\pm 0.54^\circ$
humidity measurements	$\pm 2.3\%$
DC and low frequency measurements	$\pm 2.5\%$

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

This report must not be reproduced except in full, without written approval of Cisco Systems.

**2.2 Date of testing**

11-Sep-19 - 25-Sep-19

2.3 Report Issue Date

25-Oct-19

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System. The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

2.4 Testing facilities

This assessment was performed by: Chris Blair & Julian Land

Testing Laboratory

Cisco Systems, Inc.
125 West Tasman Drive (Building P)
San Jose, CA 95134
USA

Headquarters

Cisco Systems, Inc.,
170 West Tasman Drive
San Jose, CA 95134,
USA

Registration Numbers for Industry Canada

Cisco System Site	Address	Site Identifier
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1
Building 7, 5m Chamber	425 E. Tasman Drive San Jose, California 95134	Company #: 2461N-3

Test Engineers

Chris Blair



2.5 Equipment Assessed (EUT)

C9120AXP-B

2.6 EUT Description

The radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

802.11a - Non HT20, One Antenna, 6 to 54 Mbps, 1ss
802.11a - Non HT20, Two Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT20, Three Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT20, Four Antennas, 6 to 54 Mbps, 1ss

802.11a - Non HT20 Beam Forming, Two Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT20 Beam Forming, Three Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT20 Beam Forming, Four Antennas, 6 to 54 Mbps, 1ss

802.11n/ac - HT/VHT20, One Antenna, M0 to M7, 1ss
802.11n/ac - HT/VHT20, Two Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT20, Two Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT20, Three Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT20, Three Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT20, Three Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT20, Four Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT20, Four Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT20, Four Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT20, Four Antennas, M24 to M31, 4ss

802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M24 to M31, 4ss

802.11n/ac - HT/VHT20 STBC, Two Antennas, M0 to M7, 2ss
802.11n/ac - HT/VHT20 STBC, Three Antennas, M0 to M7, 2ss
802.11n/ac - HT/VHT20 STBC, Four Antennas, M0 to M7, 2ss

802.11ax - HE20, One Antenna, M0 to M9 1ss
802.11ax - HE20, Two Antennas, M0 to M9 1ss
802.11ax - HE20, Two Antennas, M0 to M9 2ss
802.11ax - HE20, Three Antennas, M0 to M9 1ss
802.11ax - HE20, Three Antennas, M0 to M9 2ss



802.11ax - HE20, Three Antennas, M0 to M9 3ss
802.11ax - HE20, Four Antennas, M0 to M9 1ss
802.11ax - HE20, Four Antennas, M0 to M9 2ss
802.11ax - HE20, Four Antennas, M0 to M9 3ss
802.11ax - HE20, Four Antennas, M0 to M9 4ss

802.11ax - HE20 Beam Forming, Two Antennas, M0 to M9 1ss
802.11ax - HE20 Beam Forming, Two Antennas, M0 to M9 2ss
802.11ax - HE20 Beam Forming, Three Antennas, M0 to M9 1ss
802.11ax - HE20 Beam Forming, Three Antennas, M0 to M9 2ss
802.11ax - HE20 Beam Forming, Three Antennas, M0 to M9 3ss
802.11ax - HE20 Beam Forming, Four Antennas, M0 to M9 1ss
802.11ax - HE20 Beam Forming, Four Antennas, M0 to M9 2ss
802.11ax - HE20 Beam Forming, Four Antennas, M0 to M9 3ss
802.11ax - HE20 Beam Forming, Four Antennas, M0 to M9 4ss

802.11ax - HE20 STBC, Two Antennas, M0 to M9 2ss
802.11ax - HE20 STBC, Three Antennas, M0 to M9 2ss
802.11ax - HE20 STBC, Four Antennas, M0 to M9 2ss

802.11a - Non HT40, One Antenna, 6 to 54 Mbps, 1ss
802.11a - Non HT40, Two Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT40, Three Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT40, Four Antennas, 6 to 54 Mbps, 1ss

802.11n/ac - HT/VHT40, One Antenna, M0 to M7, 1ss
802.11n/ac - HT/VHT40, Two Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT40, Two Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT40, Three Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT40, Three Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT40, Three Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT40, Four Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT40, Four Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT40, Four Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT40, Four Antennas, M24 to M31, 4ss

802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M24 to M31, 4ss



802.11n/ac - HT/VHT40 STBC, Two Antennas, M0 to M7, 2ss
802.11n/ac - HT/VHT40 STBC, Three Antennas, M0 to M7, 2ss
802.11n/ac - HT/VHT40 STBC, Four Antennas, M0 to M7, 2ss

802.11ax - HE40, One Antenna, M0 to M9 1ss
802.11ax - HE40, Two Antennas, M0 to M9 1ss
802.11ax - HE40, Two Antennas, M0 to M9 2ss
802.11ax - HE40, Three Antennas, M0 to M9 1ss
802.11ax - HE40, Three Antennas, M0 to M9 2ss
802.11ax - HE40, Three Antennas, M0 to M9 3ss
802.11ax - HE40, Four Antennas, M0 to M9 1ss
802.11ax - HE40, Four Antennas, M0 to M9 2ss
802.11ax - HE40, Four Antennas, M0 to M9 3ss
802.11ax - HE40, Four Antennas, M0 to M9 4ss

802.11ax - HE40 Beam Forming, Two Antennas, M0 to M9 1ss
802.11ax - HE40 Beam Forming, Two Antennas, M0 to M9 2ss
802.11ax - HE40 Beam Forming, Three Antennas, M0 to M9 1ss
802.11ax - HE40 Beam Forming, Three Antennas, M0 to M9 2ss
802.11ax - HE40 Beam Forming, Three Antennas, M0 to M9 3ss
802.11ax - HE40 Beam Forming, Four Antennas, M0 to M9 1ss
802.11ax - HE40 Beam Forming, Four Antennas, M0 to M9 2ss
802.11ax - HE40 Beam Forming, Four Antennas, M0 to M9 3ss
802.11ax - HE40 Beam Forming, Four Antennas, M0 to M9 4ss

802.11ax - HE40 STBC, Two Antennas, M0 to M9 2ss
802.11ax - HE40 STBC, Three Antennas, M0 to M9 2ss
802.11ax - HE40 STBC, Four Antennas, M0 to M9 2ss

802.11a - Non HT80, One Antenna, 6 to 54 Mbps, 1ss
802.11a - Non HT80, Two Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT80, Three Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT80, Four Antennas, 6 to 54 Mbps, 1ss

802.11ac - VHT80, One Antenna, M0 to M9 1ss
802.11ac - VHT80, Two Antennas, M0 to M9 1ss
802.11ac - VHT80, Two Antennas, M0 to M9 2ss
802.11ac - VHT80, Three Antennas, M0 to M9 1ss
802.11ac - VHT80, Three Antennas, M0 to M9 2ss
802.11ac - VHT80, Three Antennas, M0 to M9 3ss
802.11ac - VHT80, Four Antennas, M0 to M9 1ss
802.11ac - VHT80, Four Antennas, M0 to M9 2ss
802.11ac - VHT80, Four Antennas, M0 to M9 3ss
802.11ac - VHT80, Four Antennas, M0 to M9 4ss



802.11ac - VHT80 Beam Forming, Two Antennas, M0 to M9 1ss
802.11ac - VHT80 Beam Forming, Two Antennas, M0 to M9 2ss
802.11ac - VHT80 Beam Forming, Three Antennas, M0 to M9 1ss
802.11ac - VHT80 Beam Forming, Three Antennas, M0 to M9 2ss
802.11ac - VHT80 Beam Forming, Three Antennas, M0 to M9 3ss
802.11ac - VHT80 Beam Forming, Four Antennas, M0 to M9 1ss
802.11ac - VHT80 Beam Forming, Four Antennas, M0 to M9 2ss
802.11ac - VHT80 Beam Forming, Four Antennas, M0 to M9 3ss
802.11ac - VHT80 Beam Forming, Four Antennas, M0 to M9 4ss

802.11ac - VHT80 STBC, Two Antennas, M0 to M9 2ss
802.11ac - VHT80 STBC, Three Antennas, M0 to M9 2ss
802.11ac - VHT80 STBC, Four Antennas, M0 to M9 2ss

802.11ax - HE80, One Antenna, M0 to M9 1ss
802.11ax - HE80, Two Antennas, M0 to M9 1ss
802.11ax - HE80, Two Antennas, M0 to M9 2ss
802.11ax - HE80, Three Antennas, M0 to M9 1ss
802.11ax - HE80, Three Antennas, M0 to M9 2ss
802.11ax - HE80, Three Antennas, M0 to M9 3ss
802.11ax - HE80, Four Antennas, M0 to M9 1ss
802.11ax - HE80, Four Antennas, M0 to M9 2ss
802.11ax - HE80, Four Antennas, M0 to M9 3ss
802.11ax - HE80, Four Antennas, M0 to M9 4ss

802.11ax - HE80 Beam Forming, Two Antennas, M0 to M9 1ss
802.11ax - HE80 Beam Forming, Two Antennas, M0 to M9 2ss
802.11ax - HE80 Beam Forming, Three Antennas, M0 to M9 1ss
802.11ax - HE80 Beam Forming, Three Antennas, M0 to M9 2ss
802.11ax - HE80 Beam Forming, Three Antennas, M0 to M9 3ss
802.11ax - HE80 Beam Forming, Four Antennas, M0 to M9 1ss
802.11ax - HE80 Beam Forming, Four Antennas, M0 to M9 2ss
802.11ax - HE80 Beam Forming, Four Antennas, M0 to M9 3ss
802.11ax - HE80 Beam Forming, Four Antennas, M0 to M9 4ss

802.11ax - HE80 STBC, Two Antennas, M0 to M9 2ss
802.11ax - HE80 STBC, Three Antennas, M0 to M9 2ss
802.11ax - HE80 STBC, Four Antennas, M0 to M9 2ss

802.11a - Non HT160, One Antenna, 6 to 54 Mbps, 1ss
802.11a - Non HT160, Two Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT160, Three Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT160, Four Antennas, 6 to 54 Mbps, 1ss

802.11ac - VHT160, One Antenna, M0 to M9 1ss
802.11ac - VHT160, Two Antennas, M0 to M9 1ss
802.11ac - VHT160, Two Antennas, M0 to M9 2ss



802.11ac - VHT160, Three Antennas, M0 to M9 1ss
802.11ac - VHT160, Three Antennas, M0 to M9 2ss
802.11ac - VHT160, Three Antennas, M0 to M9 3ss
802.11ac - VHT160, Four Antennas, M0 to M9 1ss
802.11ac - VHT160, Four Antennas, M0 to M9 2ss
802.11ac - VHT160, Four Antennas, M0 to M9 3ss
802.11ac - VHT160, Four Antennas, M0 to M9 4ss

802.11ac - VHT160 Beam Forming, Two Antennas, M0 to M9 1ss
802.11ac - VHT160 Beam Forming, Two Antennas, M0 to M9 2ss
802.11ac - VHT160 Beam Forming, Three Antennas, M0 to M9 1ss
802.11ac - VHT160 Beam Forming, Three Antennas, M0 to M9 2ss
802.11ac - VHT160 Beam Forming, Three Antennas, M0 to M9 3ss
802.11ac - VHT160 Beam Forming, Four Antennas, M0 to M9 1ss
802.11ac - VHT160 Beam Forming, Four Antennas, M0 to M9 2ss
802.11ac - VHT160 Beam Forming, Four Antennas, M0 to M9 3ss
802.11ac - VHT160 Beam Forming, Four Antennas, M0 to M9 4ss

802.11ac - VHT160 STBC, Two Antennas, M0 to M9 2ss
802.11ac - VHT160 STBC, Three Antennas, M0 to M9 2ss
802.11ac - VHT160 STBC, Four Antennas, M0 to M9 2ss

802.11ax - HE160, One Antenna, M0 to M9 1ss
802.11ax - HE160, Two Antennas, M0 to M9 1ss
802.11ax - HE160, Two Antennas, M0 to M9 2ss
802.11ax - HE160, Three Antennas, M0 to M9 1ss
802.11ax - HE160, Three Antennas, M0 to M9 2ss
802.11ax - HE160, Three Antennas, M0 to M9 3ss
802.11ax - HE160, Four Antennas, M0 to M9 1ss
802.11ax - HE160, Four Antennas, M0 to M9 2ss
802.11ax - HE160, Four Antennas, M0 to M9 3ss
802.11ax - HE160, Four Antennas, M0 to M9 4ss

802.11ax - HE160 Beam Forming, Two Antennas, M0 to M9 1ss
802.11ax - HE160 Beam Forming, Two Antennas, M0 to M9 2ss
802.11ax - HE160 Beam Forming, Three Antennas, M0 to M9 1ss
802.11ax - HE160 Beam Forming, Three Antennas, M0 to M9 2ss
802.11ax - HE160 Beam Forming, Three Antennas, M0 to M9 3ss
802.11ax - HE160 Beam Forming, Four Antennas, M0 to M9 1ss
802.11ax - HE160 Beam Forming, Four Antennas, M0 to M9 2ss
802.11ax - HE160 Beam Forming, Four Antennas, M0 to M9 3ss
802.11ax - HE160 Beam Forming, Four Antennas, M0 to M9 4ss

802.11ax - HE160 STBC, Two Antennas, M0 to M9 2ss
802.11ax - HE160 STBC, Three Antennas, M0 to M9 2ss
802.11ax - HE160 STBC, Four Antennas, M0 to M9 2ss



The following antennas are supported by this product series.

The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)
2.4GHz&5GHz	AIR-ANT2513P4M-N=	2.4 GHz 13 dBi/5 GHz 13 dBi Patch Ant., 4-port, N Type	13dBi@2.4GHz 13dBi@5GHz

Section 3: Result Summary

3.1 Results Summary Table

Conducted emissions

Basic Standard	Technical Requirements / Details	Result
15.407	99% & 26 dB Bandwidth: The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW. The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.	Pass
15.407	Output Power: For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
15.407	Power Spectral Density The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
15.407	Conducted Spurious Emissions / Band-Edge: 2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.	Pass
15.407 15.205 15.209	Restricted band: Unwanted emissions must comply with the general field strength limits set forth in §15.209.	Pass

**Radiated Emissions (General requirements)**

Basic Standard	Technical Requirements / Details	Result
15.407 15.205 15.209	TX Spurious Emissions: Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the field strength limits table in this section.	Not Tested
15.207	AC conducted Emissions: U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.	Not Tested



Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	C9120AXP-B	Foxconn	P2-2	1268.14948.r1 46 146	Cisco AP Software, (ap1g7), [cheetah-build6:/san2/BUILD/workspace/Nightly-Cheetah-axel-bcm-mfg-c8_10_throttle] Compiled Tue Aug 6 08:07:11 PDT 2019	FOC23302F3B
S02	DART cable 37-100909-01	Amphenol	NA	NA	NA	NA

4.2 System Details

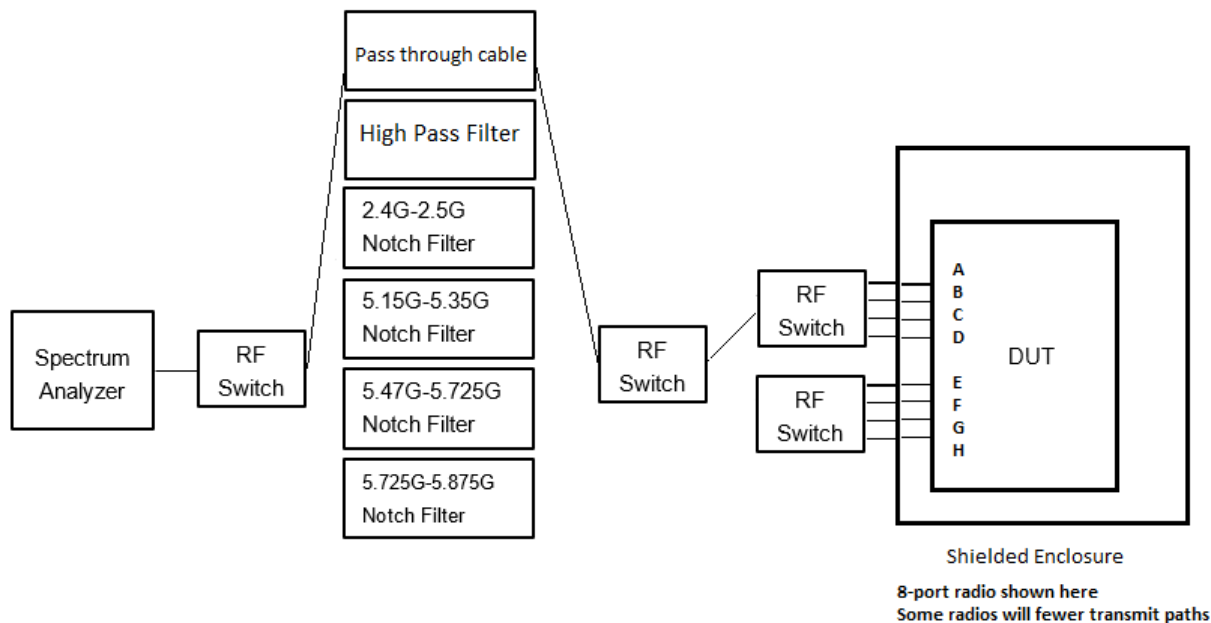
System #	Description	Samples
1	C9120AXP-B and DART cable	S01+S02

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuously Transmitting	Constant duty cycle

Appendix A: Emission Test Results

Conducted Test Setup Diagram



Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)			
	Frequency (MHz)			
	5250			
Non HT160, 6 to 54 Mbps	9			
VHT160, M0 to M9, M0 to M9 1-2ss	11			
VHT160 Beam Forming, M0 to M9, M0 to M9 1-2ss	11			
VHT160 STBC, M0 to M9 1ss	11			
HE160, M0 to M9, M0 to M9 1-2ss	12			
HE160 Beam Forming, M0 to M9, M0 to M9 1-2ss	12			
HE160 STBC, M0 to M9 1ss	12			
	5260	5300	5320	
Non HT20, 6 to 54 Mbps	14	15	15	
Non HT20 Beam Forming, 6 to 54 Mbps	13	14	13	
HT/VHT20, M0 to M31	15	15	15	
HT/VHT20 Beam Forming, M0 to M31	15	15	15	
HT/VHT20 STBC, M0 to M7	15	15	15	
HE20, M0 to M9, M0 to M9 1-2ss	15	15	15	



HE20 Beam Forming, M0 to M9, M0 to M9 1-2ss	15	15	15	
HE20 STBC, M0 to M9 2ss	15	15	15	
	5270	5310		
Non HT40, 6 to 54 Mbps	16	13		
HT/VHT40, M0 to M31	16	13		
HT/VHT40 Beam Forming, M0 to M31	16	13		
HT/VHT40 STBC, M0 to M7	15	13		
HE40, M0 to M9, M0 to M9 1-2ss	16	12		
HE40 Beam Forming, M0 to M9, M0 to M9 1-2ss	16	12		
HE40 STBC, M0 to M9 2ss	15	12		
	5290			
Non HT80, 6 to 54 Mbps	11			
VHT80, M0 to M9, M0 to M9 1-2ss	12			
VHT80 Beam Forming, M0 to M9, M0 to M9 1-2ss	12			
VHT80 STBC, M0 to M9 1ss	12			
HE80, M0 to M9, M0 to M9 1-2ss	12			
HE80 Beam Forming, M0 to M9, M0 to M9 1-2ss	12			
HE80 STBC, M0 to M9 1ss	12			



A.1 Duty Cycle

Duty Cycle Test Requirement

From KDB 789033 D02 General UNII Test Procedures New Rules v02r01

B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

1. All measurements are to be performed with the EUT transmitting at 100 percent duty cycle at its maximum power control level; however, if 100 percent duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.

Duty Cycle Test Method

From KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value. Set VBW $\geq$ RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

Duty Cycle Test Information

Tested By : Chris Blair	Date of testing: 11-Sep-19 - 25-Sep-19
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment

Samples, Systems, and Modes

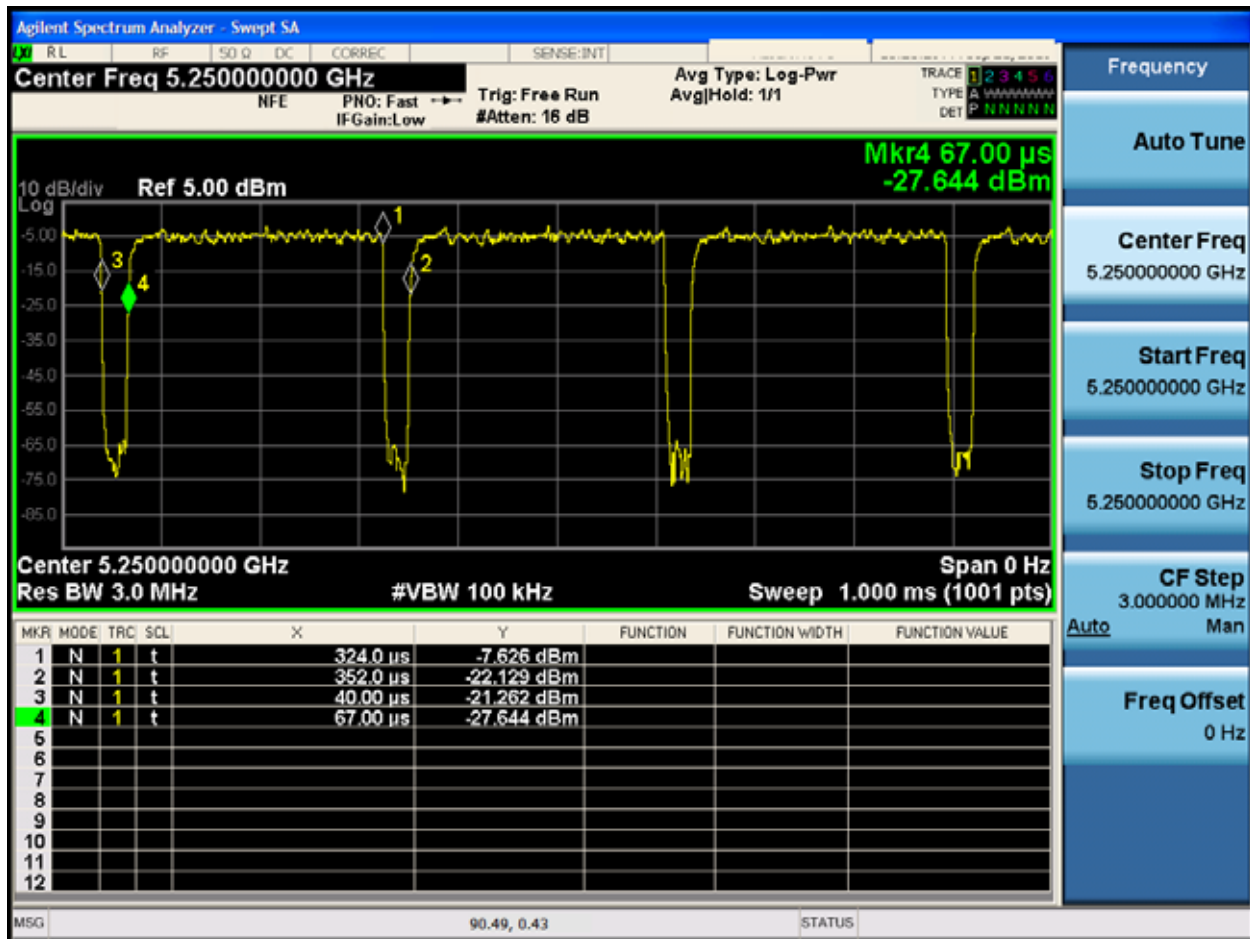
System Number	Description	Samples	System under test	Support equipment
1	EUT	S01+S02	☒	☐
	Support		☐	☒



Duty Cycle Data Table

Duty Cycle table and screen captures are shown below for power/psd modes.

Frequency	Mode	Data Rate	Duty Cycle correction (dB)
5260	Non HT20, 6 to 54 Mbps	6	0.0
	HT/VHT20, M0 to M31	m0	0.1
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	0.1
5270	Non HT40, 6 to 54 Mbps	6	0.0
	HT/VHT40, M0 to M31	m0	0.1
	HE40, M0 to M9, M0 to M9 1-2ss	m0h1	0.1
5290	Non HT80, 6 to 54 Mbps	6	0.1
	VHT80, M0 to M9, M0 to M9 1-2ss	m0x1	0.2
	HE80, M0 to M9, M0 to M9 1-2ss	m0h1	0.3
5300	Non HT20, 6 to 54 Mbps	6	0.0
	HT/VHT20, M0 to M31	m0	0.1
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	0.1
5310	Non HT40, 6 to 54 Mbps	6	0.0
	HT/VHT40, M0 to M31	m0	0.1
	HE40, M0 to M9, M0 to M9 1-2ss	m0h1	0.1
5320	Non HT20, 6 to 54 Mbps	6	0.0
	HT/VHT20, M0 to M31	m0	0.1
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	0.1
5250	Non HT160, 6 to 54 Mbps	6	0.0
	VHT160, M0 to M9, M0 to M9 1-2ss	m0x1	0.4
	HE160, M0 to M9, M0 to M9 1-2ss	m0h1	0.4

*Duty Cycle, 5250 MHz, HE160, M0 to M9, M0 to M9 1-2ss*



A.2 99% and 26dB Bandwidth

99% and 26dB Bandwidth Test Requirement

There is no requirement for the value of bandwidth.

However, the 26dB BW (EBW) is used to calculate the power limits in 15.407 (a) (2). Power measurements are made using the 99% Bandwidth as the integration bandwidth.

99% and 26dB Bandwidth Test Procedure

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Section D. 99 Percent Occupied Bandwidth

ANSI C63.10: 2013

99% BW

Test Parameters

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).

Ref KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Section C. Measurement Bandwidth, Section 1

26 BW

Test parameters

X dB BW = -26dB (using the OBW function of the spectrum analyzer)

Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Samples, Systems, and Modes



System Number	Description	Samples	System under test	Support equipment
1	EUT	S01+S02	☒	☐
	Support		☐	☒

Tested By : Chris Blair	Date of testing: 11-Sep-19 - 25-Sep-19
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment



99% and 26dB Bandwidth

Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5260	Non HT20, 6 to 54 Mbps	6	21.2	16.777
	HT/VHT20, M0 to M31	m0	21.8	18.036
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	21.4	19.122
5270	Non HT40, 6 to 54 Mbps	6	39.8	36.332
	HT/VHT40, M0 to M31	m0	40.1	36.410
	HE40, M0 to M9, M0 to M9 1-2ss	m0h1	40.0	37.565
5290	Non HT80, 6 to 54 Mbps	6	82.0	76.123
	VHT80, M0 to M9, M0 to M9 1-2ss	m0x1	82.3	75.978
	HE80, M0 to M9, M0 to M9 1-2ss	m0h1	81.8	76.979
5300	Non HT20, 6 to 54 Mbps	6	21.2	16.769
	HT/VHT20, M0 to M31	m0	21.8	18.033
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	21.4	19.117
5310	Non HT40, 6 to 54 Mbps	6	39.7	36.325
	HT/VHT40, M0 to M31	m0	40.1	36.399
	HE40, M0 to M9, M0 to M9 1-2ss	m0h1	39.8	37.532
5320	Non HT20, 6 to 54 Mbps	6	21.2	16.775
	HT/VHT20, M0 to M31	m0	21.8	18.030
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	21.5	19.130
5250	Non HT160, 6 to 54 Mbps	6	163.3	153.612
	VHT160, M0 to M9, M0 to M9 1-2ss	m0x1	164.6	154.477
	HE160, M0 to M9, M0 to M9 1-2ss	m0h1	163.0	154.583

**26dB / 99% Bandwidth, 5300 MHz, Non HT20 Beam Forming, 6 to 54 Mbps**



A.3 Maximum Conducted Output Power

Maximum Conducted Output Power Test Requirement

15.407 (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. ... If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.407 (5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Referencing “644545 D03 Guidance for IEEE 802.11ac v01”, covering signals that cross the boundary between two adjacent UNII bands, the FCC describes a procedure to measure EBW, power, and PSD in each UNII band. For the case of a 160MHz signal equally distributed between UNII-1 and UNII-2a, we apply the following alternate procedure.

Rather than measure:

- The half of the signal in UNII-1, measured against the 30dBm power / 17dBm/MHz PSD limits
- The half of the signal in UNII-2a, measured against the 24dBm power / 11dBm/MHz PSD limits

If a 160MHz signal (equally distributed between the two bands) produces a total power of 27dBm across the entire 160 MHz EBW, the total power in each band would be half of the total, or 24dBm (which meets both the UNII-1 and UNII-2a limits), and would have a PSD no greater than 11dBm/MHz in either sub-band.

Given these facts, we have measured the complete 160 MHz EBW (across both sub-bands) against 27dBm power and 11dBm/MHz PSD limits, rather than individual sub band measurements against the individual sub band limits.”

Maximum Conducted Output Power Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

ANSI C63.10: 2013

Maximum Conducted Output Power

Test Procedure

1. Set the radio in the continuous transmitting mode at full power
2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges.
3. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2

Maximum Conducted Output Power

Test parameters

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- (i) Measure the duty cycle, x , of the transmitter output signal as described in section II.B.
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz.
- (iv) Set VBW $\geq$ 3 MHz.
- (v) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- (vi) Sweep time = auto.
- (vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (viii) Do not use sweep triggering. Allow the sweep to “free run”.
- (ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
- (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth)

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. ANSI C63.10 section 14.3.2.2

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01+S02	☒	☐
	Support		☐	☒

Tested By : Chris Blair	Date of testing: 11-Sep-19 - 25-Sep-19
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment



Maximum Output Power

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Duty Cycle Correction (dB)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5260	Non HT20, 6 to 54 Mbps	1	13	10.9				0.0	10.9	17.0	6.06
	Non HT20, 6 to 54 Mbps	2	13	10.9	11.9			0.0	14.5	17.0	2.52
	Non HT20, 6 to 54 Mbps	3	13	9.1	9.6	9.1		0.0	14.1	17.0	2.91
	Non HT20, 6 to 54 Mbps	4	13	8.1	8.8	7.9	7.5	0.0	14.2	17.0	2.83
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	10.0	10.8			0.0	13.5	17.0	3.53
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	6.3	6.7	5.9		0.0	11.1	15.0	3.87
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	4.2	4.7	3.9	3.5	0.0	10.2	14.0	3.84
	HT/VHT20, M0 to M7	1	13	10.9				0.1	11.0	17.0	6.05
	HT/VHT20, M0 to M7	2	13	10.9	12.7			0.1	15.0	17.0	2.04
	HT/VHT20, M8 to M15	2	13	10.9	12.7			0.1	15.0	17.0	2.04
	HT/VHT20, M0 to M7	3	13	10.0	10.7	10.0		0.1	15.1	17.0	1.93
	HT/VHT20, M8 to M15	3	13	10.0	10.7	10.0		0.1	15.1	17.0	1.93
	HT/VHT20, M16 to M23	3	13	10.0	10.7	10.0		0.1	15.1	17.0	1.93
	HT/VHT20, M0 to M7	4	13	8.1	8.7	7.8	7.4	0.1	14.1	17.0	2.90
	HT/VHT20, M8 to M15	4	13	8.1	8.7	7.8	7.4	0.1	14.1	17.0	2.90
	HT/VHT20, M16 to M23	4	13	8.1	8.7	7.8	7.4	0.1	14.1	17.0	2.90
	HT/VHT20, M24 to M31	4	13	8.1	8.7	7.8	7.4	0.1	14.1	17.0	2.90
	HT/VHT20 Beam Forming, M0 to M7	2	13	10.0	10.7			0.1	13.4	17.0	3.57
	HT/VHT20 Beam Forming, M8 to M15	2	13	10.9	12.7			0.1	15.0	17.0	2.04
	HT/VHT20 Beam Forming, M0 to M7	3	15	6.1	6.5	5.7		0.1	10.9	15.0	4.06
	HT/VHT20 Beam Forming, M8 to M15	3	13	9.1	9.7	8.8		0.1	14.0	17.0	2.96
	HT/VHT20 Beam Forming, M16 to M23	3	13	10.0	10.7	10.0		0.1	15.1	17.0	1.93
	HT/VHT20 Beam Forming, M0 to M7	4	16	4.1	4.7	3.8	3.4	0.1	10.1	14.0	3.90
	HT/VHT20 Beam Forming, M8 to M15	4	13	6.8	7.7	6.8	6.4	0.1	13.0	17.0	3.98
	HT/VHT20 Beam Forming, M16 to M23	4	13	8.1	8.7	7.8	7.4	0.1	14.1	17.0	2.90
	HT/VHT20 Beam Forming, M24 to M31	4	13	8.1	8.7	7.8	7.4	0.1	14.1	17.0	2.90
	HT/VHT20 STBC, M0 to M7	2	13	10.9	12.7			0.1	15.0	17.0	2.04
	HT/VHT20 STBC, M0 to M7	3	13	9.1	9.7	8.8		0.1	14.0	17.0	2.96
	HT/VHT20 STBC, M0 to M7	4	13	6.8	7.7	6.8	6.4	0.1	13.0	17.0	3.98
	HE20, M0 to M9 1ss	1	13	11.1				0.1	11.2	17.0	5.83



	HE20, M0 to M9 1ss	2	13	11.1	12.1			0.1	14.7	17.0	2.29
	HE20, M0 to M9 2ss	2	13	11.1	12.1			0.1	14.7	17.0	2.29
	HE20, M0 to M9 1ss	3	13	9.4	10.1	9.3		0.1	14.5	17.0	2.54
	HE20, M0 to M9 2ss	3	13	9.4	10.1	9.3		0.1	14.5	17.0	2.54
	HE20, M0 to M9 3ss	3	13	9.4	10.1	9.3		0.1	14.5	17.0	2.54
	HE20, M0 to M9 1ss	4	13	8.4	9.2	8.3	7.9	0.1	14.6	17.0	2.43
	HE20, M0 to M9 2ss	4	13	8.4	9.2	8.3	7.9	0.1	14.6	17.0	2.43
	HE20, M0 to M9 3ss	4	13	8.4	9.2	8.3	7.9	0.1	14.6	17.0	2.43
	HE20, M0 to M9 4ss	4	13	8.4	9.2	8.3	7.9	0.1	14.6	17.0	2.43
	HE20 Beam Forming, M0 to M9 1ss	2	13	10.2	11.1			0.1	13.8	17.0	3.25
	HE20 Beam Forming, M0 to M9 2ss	2	13	11.1	12.1			0.1	14.7	17.0	2.29
	HE20 Beam Forming, M0 to M9 1ss	3	15	6.4	6.9	6.1		0.1	11.3	15.0	3.68
	HE20 Beam Forming, M0 to M9 2ss	3	13	9.4	10.1	9.3		0.1	14.5	17.0	2.54
	HE20 Beam Forming, M0 to M9 3ss	3	13	9.4	10.1	9.3		0.1	14.5	17.0	2.54
	HE20 Beam Forming, M0 to M9 1ss	4	16	4.4	5.0	4.1	3.6	0.1	10.4	14.0	3.60
	HE20 Beam Forming, M0 to M9 2ss	4	13	7.3	8.1	7.2	6.8	0.1	13.5	17.0	3.53
	HE20 Beam Forming, M0 to M9 3ss	4	13	8.4	9.2	8.3	7.9	0.1	14.6	17.0	2.43
	HE20 Beam Forming, M0 to M9 4ss	4	13	8.4	9.2	8.3	7.9	0.1	14.6	17.0	2.43
	HE20 STBC, M0 to M9 2ss	2	13	11.1	12.1			0.1	14.7	17.0	2.29
	HE20 STBC, M0 to M9 2ss	3	13	9.4	10.1	9.3		0.1	14.5	17.0	2.54
	HE20 STBC, M0 to M9 2ss	4	13	7.3	8.1	7.2	6.8	0.1	13.5	17.0	3.53
5270	Non HT40, 6 to 54 Mbps	1	13	10.7				0.0	10.7	17.0	6.26
	Non HT40, 6 to 54 Mbps	2	13	10.7	13.3			0.0	15.2	17.0	1.75
	Non HT40, 6 to 54 Mbps	3	13	10.7	11.1	11.4		0.0	15.9	17.0	1.11
	Non HT40, 6 to 54 Mbps	4	13	9.7	10.0	10.2	9.8	0.0	16.0	17.0	1.01
	HT/VHT40, M0 to M7	1	13	10.6				0.1	10.7	17.0	6.30
	HT/VHT40, M0 to M7	2	13	10.6	13.1			0.1	15.1	17.0	1.86
	HT/VHT40, M8 to M15	2	13	10.6	13.1			0.1	15.1	17.0	1.86
	HT/VHT40, M0 to M7	3	13	10.6	11.3	11.2		0.1	15.9	17.0	1.08
	HT/VHT40, M8 to M15	3	13	10.6	11.3	11.2		0.1	15.9	17.0	1.08
	HT/VHT40, M16 to M23	3	13	10.6	11.3	11.2		0.1	15.9	17.0	1.08
	HT/VHT40, M0 to M7	4	13	9.7	10.2	10.1	9.6	0.1	16.0	17.0	0.97
	HT/VHT40, M8 to M15	4	13	9.7	10.2	10.1	9.6	0.1	16.0	17.0	0.97
	HT/VHT40, M16 to M23	4	13	9.7	10.2	10.1	9.6	0.1	16.0	17.0	0.97
	HT/VHT40, M24 to M31	4	13	9.7	10.2	10.1	9.6	0.1	16.0	17.0	0.97
	HT/VHT40 Beam Forming, M0 to M7	2	13	9.7	10.2			0.1	13.1	17.0	3.93
	HT/VHT40 Beam Forming, M8 to M15	2	13	10.6	13.1			0.1	15.1	17.0	1.86
	HT/VHT40 Beam Forming, M0 to M7	3	15	5.7	6.1	6.1		0.1	10.8	15.0	4.16
	HT/VHT40 Beam Forming, M8 to M15	3	13	8.7	9.2	9.1		0.1	13.9	17.0	3.12
	HT/VHT40 Beam Forming, M16 to M23	3	13	10.6	11.3	11.2		0.1	15.9	17.0	1.08
	HT/VHT40 Beam Forming, M0 to M7	4	16	3.9	4.1	3.8	3.5	0.1	10.0	14.0	4.05



	HT/VHT40 Beam Forming, M8 to M15	4	13	6.9	7.2	7.0	6.5	0.1	13.0	17.0	3.97
	HT/VHT40 Beam Forming, M16 to M23	4	13	8.7	9.2	9.1	8.6	0.1	15.0	17.0	1.97
	HT/VHT40 Beam Forming, M24 to M31	4	13	9.7	10.2	10.1	9.6	0.1	16.0	17.0	0.97
	HT/VHT40 STBC, M0 to M7	2	13	10.6	13.1			0.1	15.1	17.0	1.86
	HT/VHT40 STBC, M0 to M7	3	13	8.7	9.2	9.1		0.1	13.9	17.0	3.12
	HT/VHT40 STBC, M0 to M7	4	13	6.9	7.2	7.0	6.5	0.1	13.0	17.0	3.97
	HE40, M0 to M9 1ss	1	13	10.8				0.1	10.9	17.0	6.07
	HE40, M0 to M9 1ss	2	13	10.8	13.4			0.1	15.4	17.0	1.57
	HE40, M0 to M9 2ss	2	13	10.8	13.4			0.1	15.4	17.0	1.57
	HE40, M0 to M9 1ss	3	13	10.8	11.4	11.4		0.1	16.1	17.0	0.89
	HE40, M0 to M9 2ss	3	13	10.8	11.4	11.4		0.1	16.1	17.0	0.89
	HE40, M0 to M9 3ss	3	13	10.8	11.4	11.4		0.1	16.1	17.0	0.89
	HE40, M0 to M9 1ss	4	13	9.9	10.4	10.2	10.0	0.1	16.3	17.0	0.72
	HE40, M0 to M9 2ss	4	13	9.9	10.4	10.2	10.0	0.1	16.3	17.0	0.72
	HE40, M0 to M9 3ss	4	13	9.9	10.4	10.2	10.0	0.1	16.3	17.0	0.72
	HE40, M0 to M9 4ss	4	13	9.9	10.4	10.2	10.0	0.1	16.3	17.0	0.72
	HE40 Beam Forming, M0 to M9 1ss	2	13	9.9	10.4			0.1	13.3	17.0	3.70
	HE40 Beam Forming, M0 to M9 2ss	2	13	10.8	13.4			0.1	15.4	17.0	1.57
	HE40 Beam Forming, M0 to M9 1ss	3	15	6.1	6.3	6.3		0.1	11.1	15.0	3.86
	HE40 Beam Forming, M0 to M9 2ss	3	13	8.9	9.4	9.4		0.1	14.1	17.0	2.86
	HE40 Beam Forming, M0 to M9 3ss	3	13	10.8	11.4	11.4		0.1	16.1	17.0	0.89
	HE40 Beam Forming, M0 to M9 1ss	4	16	4.0	4.3	4.0	3.6	0.1	10.1	14.0	3.87
	HE40 Beam Forming, M0 to M9 2ss	4	13	7.1	7.2	7.2	6.8	0.1	13.2	17.0	3.77
	HE40 Beam Forming, M0 to M9 3ss	4	13	8.9	9.4	9.4	8.9	0.1	15.3	17.0	1.69
	HE40 Beam Forming, M0 to M9 4ss	4	13	9.9	10.4	10.2	10.0	0.1	16.3	17.0	0.72
	HE40 STBC, M0 to M9 2ss	2	13	10.8	13.4			0.1	15.4	17.0	1.57
	HE40 STBC, M0 to M9 2ss	3	13	8.9	9.4	9.4		0.1	14.1	17.0	2.86
	HE40 STBC, M0 to M9 2ss	4	13	7.1	7.2	7.2	6.8	0.1	13.2	17.0	3.77
5290	Non HT80, 6 to 54 Mbps	1	13	6.7				0.1	6.8	17.0	10.25
	Non HT80, 6 to 54 Mbps	2	13	6.7	6.5			0.1	9.7	17.0	7.34
	Non HT80, 6 to 54 Mbps	3	13	5.9	5.6	6.0		0.1	10.7	17.0	6.34
	Non HT80, 6 to 54 Mbps	4	13	4.8	4.5	4.7	4.2	0.1	10.6	17.0	6.37
	VHT80, M0 to M9 1ss	1	13	7.6				0.2	7.8	17.0	9.18
	VHT80, M0 to M9 1ss	2	13	6.6	6.5			0.2	9.8	17.0	7.22
	VHT80, M0 to M9 2ss	2	13	6.6	6.5			0.2	9.8	17.0	7.22
	VHT80, M0 to M9 1ss	3	13	6.6	6.5	6.8		0.2	11.6	17.0	5.38
	VHT80, M0 to M9 2ss	3	13	6.6	6.5	6.8		0.2	11.6	17.0	5.38
	VHT80, M0 to M9 3ss	3	13	6.6	6.5	6.8		0.2	11.6	17.0	5.38
	VHT80, M0 to M9 1ss	4	13	5.8	5.5	5.8	4.9	0.2	11.8	17.0	5.25
	VHT80, M0 to M9 2ss	4	13	5.8	5.5	5.8	4.9	0.2	11.8	17.0	5.25
	VHT80, M0 to M9 3ss	4	13	5.8	5.5	5.8	4.9	0.2	11.8	17.0	5.25



	VHT80, M0 to M9 4ss	4	13	5.8	5.5	5.8	4.9	0.2	11.8	17.0	5.25
	VHT80 Beam Forming, M0 to M9 1ss	2	13	6.6	6.5			0.2	9.8	17.0	7.22
	VHT80 Beam Forming, M0 to M9 2ss	2	13	6.6	6.5			0.2	9.8	17.0	7.22
	VHT80 Beam Forming, M0 to M9 1ss	3	15	4.8	4.4	4.7		0.2	9.6	15.0	5.38
	VHT80 Beam Forming, M0 to M9 2ss	3	13	6.6	6.5	6.8		0.2	11.6	17.0	5.38
	VHT80 Beam Forming, M0 to M9 3ss	3	13	6.6	6.5	6.8		0.2	11.6	17.0	5.38
	VHT80 Beam Forming, M0 to M9 1ss	4	16	3.9	3.5	3.5	2.9	0.2	9.7	14.0	4.30
	VHT80 Beam Forming, M0 to M9 2ss	4	13	5.8	5.5	5.8	4.9	0.2	11.8	17.0	5.25
	VHT80 Beam Forming, M0 to M9 3ss	4	13	5.8	5.5	5.8	4.9	0.2	11.8	17.0	5.25
	VHT80 Beam Forming, M0 to M9 4ss	4	13	5.8	5.5	5.8	4.9	0.2	11.8	17.0	5.25
	VHT80 STBC, M0 to M9 1ss	2	13	6.6	6.5			0.2	9.8	17.0	7.22
	VHT80 STBC, M0 to M9 1ss	3	13	6.6	6.5	6.8		0.2	11.6	17.0	5.38
	VHT80 STBC, M0 to M9 1ss	4	13	5.8	5.5	5.8	4.9	0.2	11.8	17.0	5.25
	HE80, M0 to M9 1ss	1	13	6.8				0.3	7.1	17.0	9.94
	HE80, M0 to M9 1ss	2	13	6.8	6.5			0.3	9.9	17.0	7.08
	HE80, M0 to M9 2ss	2	13	6.8	6.5			0.3	9.9	17.0	7.08
	HE80, M0 to M9 1ss	3	13	5.9	5.6	5.8		0.3	10.8	17.0	6.20
	HE80, M0 to M9 2ss	3	13	5.9	5.6	5.8		0.3	10.8	17.0	6.20
	HE80, M0 to M9 3ss	3	13	5.9	5.6	5.8		0.3	10.8	17.0	6.20
	HE80, M0 to M9 1ss	4	13	5.9	5.6	5.8	4.9	0.3	11.8	17.0	5.15
	HE80, M0 to M9 2ss	4	13	5.9	5.6	5.8	4.9	0.3	11.8	17.0	5.15
	HE80, M0 to M9 3ss	4	13	5.9	5.6	5.8	4.9	0.3	11.8	17.0	5.15
	HE80, M0 to M9 4ss	4	13	5.9	5.6	5.8	4.9	0.3	11.8	17.0	5.15
	HE80 Beam Forming, M0 to M9 1ss	2	13	6.8	6.5			0.3	9.9	17.0	7.08
	HE80 Beam Forming, M0 to M9 2ss	2	13	6.8	6.5			0.3	9.9	17.0	7.08
	HE80 Beam Forming, M0 to M9 1ss	3	15	4.8	4.4	4.7		0.3	9.7	15.0	5.33
	HE80 Beam Forming, M0 to M9 2ss	3	13	5.9	5.6	5.8		0.3	10.8	17.0	6.20
	HE80 Beam Forming, M0 to M9 3ss	3	13	5.9	5.6	5.8		0.3	10.8	17.0	6.20
	HE80 Beam Forming, M0 to M9 1ss	4	16	3.8	3.4	3.6	3.1	0.3	9.8	14.0	4.24
	HE80 Beam Forming, M0 to M9 2ss	4	13	5.9	5.6	5.8	4.9	0.3	11.8	17.0	5.15
	HE80 Beam Forming, M0 to M9 3ss	4	13	5.9	5.6	5.8	4.9	0.3	11.8	17.0	5.15
	HE80 Beam Forming, M0 to M9 4ss	4	13	5.9	5.6	5.8	4.9	0.3	11.8	17.0	5.15
	HE80 STBC, M0 to M9 1ss	2	13	6.8	6.5			0.3	9.9	17.0	7.08
	HE80 STBC, M0 to M9 1ss	3	13	5.9	5.6	5.8		0.3	10.8	17.0	6.20
	HE80 STBC, M0 to M9 1ss	4	13	5.9	5.6	5.8	4.9	0.3	11.8	17.0	5.15
5300	Non HT20, 6 to 54 Mbps	1	13	11.2				0.0	11.2	17.0	5.76
	Non HT20, 6 to 54 Mbps	2	13	11.2	11.8			0.0	14.6	17.0	2.44
	Non HT20, 6 to 54 Mbps	3	13	9.4	9.5	9.1		0.0	14.2	17.0	2.85
	Non HT20, 6 to 54 Mbps	4	13	8.3	8.7	8.1	7.2	0.0	14.2	17.0	2.83
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	10.2	10.8			0.0	13.6	17.0	3.44
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	6.5	6.6	6.1		0.0	11.2	15.0	3.78



Non HT20 Beam Forming, 6 to 54 Mbps	4	16	4.3	4.6	4.2	3.3	0.0	10.2	14.0	3.81
HT/VHT20, M0 to M7	1	13	11.2				0.1	11.3	17.0	5.75
HT/VHT20, M0 to M7	2	13	11.2	12.7			0.1	15.1	17.0	1.92
HT/VHT20, M8 to M15	2	13	11.2	12.7			0.1	15.1	17.0	1.92
HT/VHT20, M0 to M7	3	13	9.4	9.6	9.2		0.1	14.2	17.0	2.77
HT/VHT20, M8 to M15	3	13	9.4	9.6	9.2		0.1	14.2	17.0	2.77
HT/VHT20, M16 to M23	3	13	9.4	9.6	9.2		0.1	14.2	17.0	2.77
HT/VHT20, M0 to M7	4	13	8.4	8.7	8.0	7.2	0.1	14.2	17.0	2.82
HT/VHT20, M8 to M15	4	13	8.4	8.7	8.0	7.2	0.1	14.2	17.0	2.82
HT/VHT20, M16 to M23	4	13	8.4	8.7	8.0	7.2	0.1	14.2	17.0	2.82
HT/VHT20, M24 to M31	4	13	8.4	8.7	8.0	7.2	0.1	14.2	17.0	2.82
HT/VHT20 Beam Forming, M0 to M7	2	13	10.1	10.7			0.1	13.5	17.0	3.53
HT/VHT20 Beam Forming, M8 to M15	2	13	11.2	12.7			0.1	15.1	17.0	1.92
HT/VHT20 Beam Forming, M0 to M7	3	15	6.3	6.5	5.9		0.1	11.1	15.0	3.94
HT/VHT20 Beam Forming, M8 to M15	3	13	9.4	9.6	9.2		0.1	14.2	17.0	2.77
HT/VHT20 Beam Forming, M16 to M23	3	13	9.4	9.6	9.2		0.1	14.2	17.0	2.77
HT/VHT20 Beam Forming, M0 to M7	4	16	4.3	4.5	4.0	3.0	0.1	10.1	14.0	3.94
HT/VHT20 Beam Forming, M8 to M15	4	13	7.2	7.5	7.1	6.3	0.1	13.1	17.0	3.88
HT/VHT20 Beam Forming, M16 to M23	4	13	8.4	8.7	8.0	7.2	0.1	14.2	17.0	2.82
HT/VHT20 Beam Forming, M24 to M31	4	13	8.4	8.7	8.0	7.2	0.1	14.2	17.0	2.82
HT/VHT20 STBC, M0 to M7	2	13	11.2	12.7			0.1	15.1	17.0	1.92
HT/VHT20 STBC, M0 to M7	3	13	9.4	9.6	9.2		0.1	14.2	17.0	2.77
HT/VHT20 STBC, M0 to M7	4	13	7.2	7.5	7.1	6.3	0.1	13.1	17.0	3.88
HE20, M0 to M9 1ss	1	13	11.4				0.1	11.5	17.0	5.53
HE20, M0 to M9 1ss	2	13	11.4	12.9			0.1	15.3	17.0	1.70
HE20, M0 to M9 2ss	2	13	11.4	12.9			0.1	15.3	17.0	1.70
HE20, M0 to M9 1ss	3	13	9.6	9.9	9.4		0.1	14.5	17.0	2.52
HE20, M0 to M9 2ss	3	13	9.6	9.9	9.4		0.1	14.5	17.0	2.52
HE20, M0 to M9 3ss	3	13	9.6	9.9	9.4		0.1	14.5	17.0	2.52
HE20, M0 to M9 1ss	4	13	8.6	8.9	8.4	7.5	0.1	14.5	17.0	2.53
HE20, M0 to M9 2ss	4	13	8.6	8.9	8.4	7.5	0.1	14.5	17.0	2.53
HE20, M0 to M9 3ss	4	13	8.6	8.9	8.4	7.5	0.1	14.5	17.0	2.53
HE20, M0 to M9 4ss	4	13	8.6	8.9	8.4	7.5	0.1	14.5	17.0	2.53
HE20 Beam Forming, M0 to M9 1ss	2	13	10.4	11.0			0.1	13.8	17.0	3.21
HE20 Beam Forming, M0 to M9 2ss	2	13	11.4	12.9			0.1	15.3	17.0	1.70
HE20 Beam Forming, M0 to M9 1ss	3	15	6.6	6.8	6.3		0.1	11.4	15.0	3.59
HE20 Beam Forming, M0 to M9 2ss	3	13	9.6	9.9	9.4		0.1	14.5	17.0	2.52
HE20 Beam Forming, M0 to M9 3ss	3	13	9.6	9.9	9.4		0.1	14.5	17.0	2.52
HE20 Beam Forming, M0 to M9 1ss	4	16	4.6	4.7	4.3	3.4	0.1	10.4	14.0	3.63
HE20 Beam Forming, M0 to M9 2ss	4	13	7.6	7.7	7.4	6.5	0.1	13.4	17.0	3.58
HE20 Beam Forming, M0 to M9 3ss	4	13	8.6	8.9	8.4	7.5	0.1	14.5	17.0	2.53
HE20 Beam Forming, M0 to M9 4ss	4	13	8.6	8.9	8.4	7.5	0.1	14.5	17.0	2.53



	HE20 STBC, M0 to M9 2ss	2	13	11.4	12.9			0.1	15.3	17.0	1.70
	HE20 STBC, M0 to M9 2ss	3	13	9.6	9.9	9.4		0.1	14.5	17.0	2.52
	HE20 STBC, M0 to M9 2ss	4	13	7.6	7.7	7.4	6.5	0.1	13.4	17.0	3.58
5310	Non HT40, 6 to 54 Mbps	1	13	8.1				0.0	8.1	17.0	8.86
	Non HT40, 6 to 54 Mbps	2	13	8.1	8.0			0.0	11.1	17.0	5.90
	Non HT40, 6 to 54 Mbps	3	13	7.1	7.1	7.2		0.0	11.9	17.0	5.05
	Non HT40, 6 to 54 Mbps	4	13	7.1	7.1	7.2	6.4	0.0	13.0	17.0	3.97
	HT/VHT40, M0 to M7	1	13	7.7				0.1	7.8	17.0	9.20
	HT/VHT40, M0 to M7	2	13	7.7	7.7			0.1	10.8	17.0	6.19
	HT/VHT40, M8 to M15	2	13	7.7	7.7			0.1	10.8	17.0	6.19
	HT/VHT40, M0 to M7	3	13	6.8	6.9	7.1		0.1	11.8	17.0	5.19
	HT/VHT40, M8 to M15	3	13	6.8	6.9	7.1		0.1	11.8	17.0	5.19
	HT/VHT40, M16 to M23	3	13	6.8	6.9	7.1		0.1	11.8	17.0	5.19
	HT/VHT40, M0 to M7	4	13	6.8	6.9	7.1	6.3	0.1	12.9	17.0	4.09
	HT/VHT40, M8 to M15	4	13	6.8	6.9	7.1	6.3	0.1	12.9	17.0	4.09
	HT/VHT40, M16 to M23	4	13	6.8	6.9	7.1	6.3	0.1	12.9	17.0	4.09
	HT/VHT40, M24 to M31	4	13	6.8	6.9	7.1	6.3	0.1	12.9	17.0	4.09
	HT/VHT40 Beam Forming, M0 to M7	2	13	7.7	7.7			0.1	10.8	17.0	6.19
	HT/VHT40 Beam Forming, M8 to M15	2	13	7.7	7.7			0.1	10.8	17.0	6.19
	HT/VHT40 Beam Forming, M0 to M7	3	15	5.8	5.9	6.2		0.1	10.8	15.0	4.16
	HT/VHT40 Beam Forming, M8 to M15	3	13	6.8	6.9	7.1		0.1	11.8	17.0	5.19
	HT/VHT40 Beam Forming, M16 to M23	3	13	6.8	6.9	7.1		0.1	11.8	17.0	5.19
	HT/VHT40 Beam Forming, M0 to M7	4	16	3.8	4.1	4.1	3.1	0.1	9.9	14.0	4.08
	HT/VHT40 Beam Forming, M8 to M15	4	13	6.8	6.9	7.1	6.3	0.1	12.9	17.0	4.09
	HT/VHT40 Beam Forming, M16 to M23	4	13	6.8	6.9	7.1	6.3	0.1	12.9	17.0	4.09
	HT/VHT40 Beam Forming, M24 to M31	4	13	6.8	6.9	7.1	6.3	0.1	12.9	17.0	4.09
	HT/VHT40 STBC, M0 to M7	2	13	7.7	7.7			0.1	10.8	17.0	6.19
	HT/VHT40 STBC, M0 to M7	3	13	6.8	6.9	7.1		0.1	11.8	17.0	5.19
	HT/VHT40 STBC, M0 to M7	4	13	6.8	6.9	7.1	6.3	0.1	12.9	17.0	4.09
	HE40, M0 to M9 1ss	1	13	8.1				0.1	8.2	17.0	8.77
	HE40, M0 to M9 1ss	2	13	7.3	7.2			0.1	10.4	17.0	6.61
	HE40, M0 to M9 2ss	2	13	7.3	7.2			0.1	10.4	17.0	6.61
	HE40, M0 to M9 1ss	3	13	7.3	7.2	7.4		0.1	12.2	17.0	4.80
	HE40, M0 to M9 2ss	3	13	7.3	7.2	7.4		0.1	12.2	17.0	4.80
	HE40, M0 to M9 3ss	3	13	7.3	7.2	7.4		0.1	12.2	17.0	4.80
	HE40, M0 to M9 1ss	4	13	6.0	6.2	6.4	5.4	0.1	12.2	17.0	4.83
	HE40, M0 to M9 2ss	4	13	6.0	6.2	6.4	5.4	0.1	12.2	17.0	4.83
	HE40, M0 to M9 3ss	4	13	6.0	6.2	6.4	5.4	0.1	12.2	17.0	4.83
	HE40, M0 to M9 4ss	4	13	6.0	6.2	6.4	5.4	0.1	12.2	17.0	4.83
	HE40 Beam Forming, M0 to M9 1ss	2	13	7.3	7.2			0.1	10.4	17.0	6.61
	HE40 Beam Forming, M0 to M9 2ss	2	13	7.3	7.2			0.1	10.4	17.0	6.61



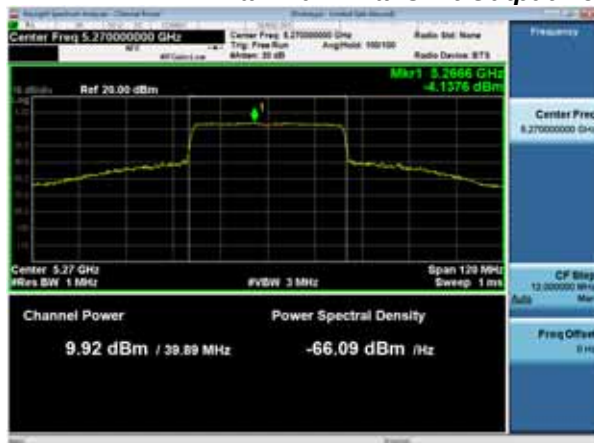
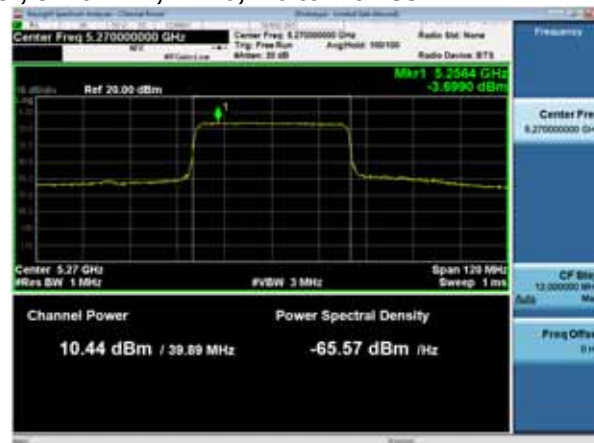
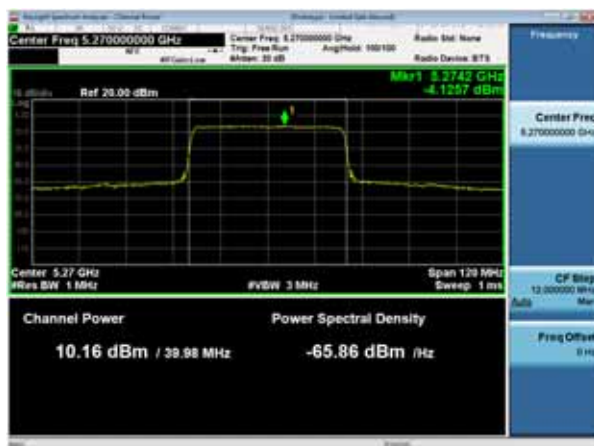
	HE40 Beam Forming, M0 to M9 1ss	3	15	6.0	6.2	6.4		0.1	11.1	15.0	3.90
	HE40 Beam Forming, M0 to M9 2ss	3	13	7.3	7.2	7.4		0.1	12.2	17.0	4.80
	HE40 Beam Forming, M0 to M9 3ss	3	13	7.3	7.2	7.4		0.1	12.2	17.0	4.80
	HE40 Beam Forming, M0 to M9 1ss	4	16	4.2	4.3	4.3	3.2	0.1	10.2	14.0	3.83
	HE40 Beam Forming, M0 to M9 2ss	4	13	6.0	6.2	6.4	5.4	0.1	12.2	17.0	4.83
	HE40 Beam Forming, M0 to M9 3ss	4	13	6.0	6.2	6.4	5.4	0.1	12.2	17.0	4.83
	HE40 Beam Forming, M0 to M9 4ss	4	13	6.0	6.2	6.4	5.4	0.1	12.2	17.0	4.83
	HE40 STBC, M0 to M9 2ss	2	13	7.3	7.2			0.1	10.4	17.0	6.61
	HE40 STBC, M0 to M9 2ss	3	13	7.3	7.2	7.4		0.1	12.2	17.0	4.80
	HE40 STBC, M0 to M9 2ss	4	13	6.0	6.2	6.4	5.4	0.1	12.2	17.0	4.83
5320	Non HT20, 6 to 54 Mbps	1	13	11.1				0.0	11.1	17.0	5.86
	Non HT20, 6 to 54 Mbps	2	13	11.1	12.6			0.0	15.0	17.0	2.03
	Non HT20, 6 to 54 Mbps	3	13	9.1	9.6	9.0		0.0	14.1	17.0	2.94
	Non HT20, 6 to 54 Mbps	4	13	8.0	8.7	8.1	7.0	0.0	14.1	17.0	2.94
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	9.9	10.8			0.0	13.4	17.0	3.57
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	6.2	6.5	5.9		0.0	11.0	15.0	3.98
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	4.0	4.6	4.1	3.0	0.0	10.0	14.0	3.97
	HT/VHT20, M0 to M7	1	13	10.9				0.1	11.0	17.0	6.05
	HT/VHT20, M0 to M7	2	13	10.9	12.7			0.1	15.0	17.0	2.04
	HT/VHT20, M8 to M15	2	13	10.9	12.7			0.1	15.0	17.0	2.04
	HT/VHT20, M0 to M7	3	13	10.1	10.7	10.2		0.1	15.2	17.0	1.83
	HT/VHT20, M8 to M15	3	13	10.1	10.7	10.2		0.1	15.2	17.0	1.83
	HT/VHT20, M16 to M23	3	13	10.1	10.7	10.2		0.1	15.2	17.0	1.83
	HT/VHT20, M0 to M7	4	13	9.1	9.5	9.1	8.0	0.1	15.0	17.0	1.97
	HT/VHT20, M8 to M15	4	13	9.1	9.5	9.1	8.0	0.1	15.0	17.0	1.97
	HT/VHT20, M16 to M23	4	13	9.1	9.5	9.1	8.0	0.1	15.0	17.0	1.97
	HT/VHT20, M24 to M31	4	13	9.1	9.5	9.1	8.0	0.1	15.0	17.0	1.97
	HT/VHT20 Beam Forming, M0 to M7	2	13	10.1	10.7			0.1	13.5	17.0	3.53
	HT/VHT20 Beam Forming, M8 to M15	2	13	10.9	12.7			0.1	15.0	17.0	2.04
	HT/VHT20 Beam Forming, M0 to M7	3	15	6.2	6.5	6.0		0.1	11.1	15.0	3.94
	HT/VHT20 Beam Forming, M8 to M15	3	13	9.1	9.5	9.1		0.1	14.1	17.0	2.94
	HT/VHT20 Beam Forming, M16 to M23	3	13	10.1	10.7	10.2		0.1	15.2	17.0	1.83
	HT/VHT20 Beam Forming, M0 to M7	4	16	3.9	4.2	3.7	2.6	0.1	9.7	14.0	4.29
	HT/VHT20 Beam Forming, M8 to M15	4	13	7.1	7.6	7.0	6.1	0.1	13.1	17.0	3.94
	HT/VHT20 Beam Forming, M16 to M23	4	13	9.1	9.5	9.1	8.0	0.1	15.0	17.0	1.97
	HT/VHT20 Beam Forming, M24 to M31	4	13	9.1	9.5	9.1	8.0	0.1	15.0	17.0	1.97
	HT/VHT20 STBC, M0 to M7	2	13	10.9	12.7			0.1	15.0	17.0	2.04
	HT/VHT20 STBC, M0 to M7	3	13	9.1	9.5	9.1		0.1	14.1	17.0	2.94
	HT/VHT20 STBC, M0 to M7	4	13	7.1	7.6	7.0	6.1	0.1	13.1	17.0	3.94
	HE20, M0 to M9 1ss	1	13	10.9				0.1	11.0	17.0	6.03
	HE20, M0 to M9 1ss	2	13	10.9	12.8			0.1	15.0	17.0	1.97



	HE20, M0 to M9 2ss	2	13	10.9	12.8			0.1	15.0	17.0	1.97
	HE20, M0 to M9 1ss	3	13	10.0	10.7	10.3		0.1	15.2	17.0	1.82
	HE20, M0 to M9 2ss	3	13	10.0	10.7	10.3		0.1	15.2	17.0	1.82
	HE20, M0 to M9 3ss	3	13	10.0	10.7	10.3		0.1	15.2	17.0	1.82
	HE20, M0 to M9 1ss	4	13	9.1	9.5	9.3	7.9	0.1	15.1	17.0	1.92
	HE20, M0 to M9 2ss	4	13	9.1	9.5	9.3	7.9	0.1	15.1	17.0	1.92
	HE20, M0 to M9 3ss	4	13	9.1	9.5	9.3	7.9	0.1	15.1	17.0	1.92
	HE20, M0 to M9 4ss	4	13	9.1	9.5	9.3	7.9	0.1	15.1	17.0	1.92
	HE20 Beam Forming, M0 to M9 1ss	2	13	10.0	10.7			0.1	13.4	17.0	3.56
	HE20 Beam Forming, M0 to M9 2ss	2	13	10.9	12.8			0.1	15.0	17.0	1.97
	HE20 Beam Forming, M0 to M9 1ss	3	15	6.2	6.6	6.0		0.1	11.1	15.0	3.88
	HE20 Beam Forming, M0 to M9 2ss	3	13	9.1	9.5	9.3		0.1	14.1	17.0	2.86
	HE20 Beam Forming, M0 to M9 3ss	3	13	10.0	10.7	10.3		0.1	15.2	17.0	1.82
	HE20 Beam Forming, M0 to M9 1ss	4	16	4.1	4.6	4.1	2.9	0.1	10.1	14.0	3.94
	HE20 Beam Forming, M0 to M9 2ss	4	13	7.1	7.6	7.0	6.1	0.1	13.1	17.0	3.93
	HE20 Beam Forming, M0 to M9 3ss	4	13	9.1	9.5	9.3	7.9	0.1	15.1	17.0	1.92
	HE20 Beam Forming, M0 to M9 4ss	4	13	9.1	9.5	9.3	7.9	0.1	15.1	17.0	1.92
	HE20 STBC, M0 to M9 2ss	2	13	10.9	12.8			0.1	15.0	17.0	1.97
	HE20 STBC, M0 to M9 2ss	3	13	9.1	9.5	9.3		0.1	14.1	17.0	2.86
	HE20 STBC, M0 to M9 2ss	4	13	7.1	7.6	7.0	6.1	0.1	13.1	17.0	3.93
5250	Non HT160, 6 to 54 Mbps	1	13	4.9				0.0	4.9	17.0	12.05
	Non HT160, 6 to 54 Mbps	2	13	4.9	4.4			0.0	7.7	17.0	9.28
	Non HT160, 6 to 54 Mbps	3	13	4.9	4.4	4.1		0.0	9.3	17.0	7.70
	Non HT160, 6 to 54 Mbps	4	13	3.8	3.3	3.1	2.5	0.0	9.3	17.0	7.73
	VHT160, M0 to M9 1ss	1	13	5.8				0.4	6.2	17.0	10.81
	VHT160, M0 to M9 1ss	2	13	5.8	5.3			0.4	9.0	17.0	8.04
	VHT160, M0 to M9 2ss	2	13	5.8	5.3			0.4	9.0	17.0	8.04
	VHT160, M0 to M9 1ss	3	13	5.8	5.3	5.2		0.4	10.6	17.0	6.40
	VHT160, M0 to M9 2ss	3	13	5.8	5.3	5.2		0.4	10.6	17.0	6.40
	VHT160, M0 to M9 3ss	3	13	5.8	5.3	5.2		0.4	10.6	17.0	6.40
	VHT160, M0 to M9 1ss	4	13	4.8	4.5	4.1	3.3	0.4	10.6	17.0	6.38
	VHT160, M0 to M9 2ss	4	13	4.8	4.5	4.1	3.3	0.4	10.6	17.0	6.38
	VHT160, M0 to M9 3ss	4	13	4.8	4.5	4.1	3.3	0.4	10.6	17.0	6.38
	VHT160, M0 to M9 4ss	4	13	4.8	4.5	4.1	3.3	0.4	10.6	17.0	6.38
	VHT160 Beam Forming, M0 to M9 1ss	2	13	5.8	5.3			0.4	9.0	17.0	8.04
	VHT160 Beam Forming, M0 to M9 2ss	2	13	5.8	5.3			0.4	9.0	17.0	8.04
	VHT160 Beam Forming, M0 to M9 1ss	3	15	4.8	4.5	4.1		0.4	9.6	15.0	5.36
	VHT160 Beam Forming, M0 to M9 2ss	3	13	5.8	5.3	5.2		0.4	10.6	17.0	6.40
	VHT160 Beam Forming, M0 to M9 3ss	3	13	5.8	5.3	5.2		0.4	10.6	17.0	6.40
	VHT160 Beam Forming, M0 to M9 1ss	4	16	3.8	3.4	3.1	2.4	0.4	9.6	14.0	4.38
	VHT160 Beam Forming, M0 to M9 2ss	4	13	4.8	4.5	4.1	3.3	0.4	10.6	17.0	6.38



VHT160 Beam Forming, M0 to M9 3ss	4	13	4.8	4.5	4.1	3.3	0.4	10.6	17.0	6.38
VHT160 Beam Forming, M0 to M9 4ss	4	13	4.8	4.5	4.1	3.3	0.4	10.6	17.0	6.38
VHT160 STBC, M0 to M9 1ss	2	13	5.8	5.3			0.4	9.0	17.0	8.04
VHT160 STBC, M0 to M9 1ss	3	13	5.8	5.3	5.2		0.4	10.6	17.0	6.40
VHT160 STBC, M0 to M9 1ss	4	13	4.8	4.5	4.1	3.3	0.4	10.6	17.0	6.38
HE160, M0 to M9 1ss	1	13	6.9				0.4	7.3	17.0	9.67
HE160, M0 to M9 1ss	2	13	6.9	6.5			0.4	10.1	17.0	6.85
HE160, M0 to M9 2ss	2	13	6.9	6.5			0.4	10.1	17.0	6.85
HE160, M0 to M9 1ss	3	13	5.9	5.5	5.4		0.4	10.8	17.0	6.19
HE160, M0 to M9 2ss	3	13	5.9	5.5	5.4		0.4	10.8	17.0	6.19
HE160, M0 to M9 3ss	3	13	5.9	5.5	5.4		0.4	10.8	17.0	6.19
HE160, M0 to M9 1ss	4	13	5.9	5.5	5.4	4.8	0.4	11.9	17.0	5.13
HE160, M0 to M9 2ss	4	13	5.9	5.5	5.4	4.8	0.4	11.9	17.0	5.13
HE160, M0 to M9 3ss	4	13	5.9	5.5	5.4	4.8	0.4	11.9	17.0	5.13
HE160, M0 to M9 4ss	4	13	5.9	5.5	5.4	4.8	0.4	11.9	17.0	5.13
HE160 Beam Forming, M0 to M9 1ss	2	13	6.9	6.5			0.4	10.1	17.0	6.85
HE160 Beam Forming, M0 to M9 2ss	2	13	6.9	6.5			0.4	10.1	17.0	6.85
HE160 Beam Forming, M0 to M9 1ss	3	15	5.9	5.5	5.4		0.4	10.8	15.0	4.19
HE160 Beam Forming, M0 to M9 2ss	3	13	5.9	5.5	5.4		0.4	10.8	17.0	6.19
HE160 Beam Forming, M0 to M9 3ss	3	13	5.9	5.5	5.4		0.4	10.8	17.0	6.19
HE160 Beam Forming, M0 to M9 1ss	4	16	3.9	3.5	3.3	2.6	0.4	9.8	14.0	4.20
HE160 Beam Forming, M0 to M9 2ss	4	13	5.9	5.5	5.4	4.8	0.4	11.9	17.0	5.13
HE160 Beam Forming, M0 to M9 3ss	4	13	5.9	5.5	5.4	4.8	0.4	11.9	17.0	5.13
HE160 Beam Forming, M0 to M9 4ss	4	13	5.9	5.5	5.4	4.8	0.4	11.9	17.0	5.13
HE160 STBC, M0 to M9 1ss	2	13	6.9	6.5			0.4	10.1	17.0	6.85
HE160 STBC, M0 to M9 1ss	3	13	5.9	5.5	5.4		0.4	10.8	17.0	6.19
HE160 STBC, M0 to M9 1ss	4	13	5.9	5.5	5.4	4.8	0.4	11.9	17.0	5.13

**Maximum Transmit Output Power, 5270 MHz, HE40, M0 to M9 1ss****Antenna A****Antenna B****Antenna C****Antenna D**



A.4 Power Spectral Density

Power Spectral Density Test Requirement

15.407 (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.407 (5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Referencing “644545 D03 Guidance for IEEE 802.11ac v01”, covering signals that cross the boundary between two adjacent UNII bands, the FCC describes a procedure to measure EBW, power, and PSD in each UNII band. For the case of a 160MHz signal equally distributed between UNII-1 and UNII-2a, we apply the following alternate procedure.

Rather than measure:

- The half of the signal in UNII-1, measured against the 30dBm power / 17dBm/MHz PSD limits
- The half of the signal in UNII-2a, measured against the 24dBm power / 11dBm/MHz PSD limits

If a 160MHz signal (equally distributed between the two bands) produces a total power of 27dBm across the entire 160 MHz EBW, the total power in each band would be half of the total, or 24dBm (which meets both the UNII-1 and UNII-2a limits), and would have a PSD no greater than 11dBm/MHz in either sub-band.

Given these facts, we have measured the complete 160 MHz EBW (across both sub-bands) against 27dBm power and 11dBm/MHz PSD limits, rather than individual sub band measurements against the individual sub band limits.”

Power Spectral Density Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

F. Maximum Power Spectral Density (PSD)

Power Spectral Density

Test Procedure

The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission.

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...”. (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.
b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1 MHz reference bandwidth.



Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2

Power Spectral Density

Test parameters

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- (i) Measure the duty cycle, x , of the transmitter output signal as described in section II.B.
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz.
- (iv) Set VBW $\geq$ 3 MHz.
- (v) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- (vi) Sweep time = auto.
- (vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (viii) Do not use sweep triggering. Allow the sweep to “free run”.
- (ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
- (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth)

F. Maximum Power Spectral Density (PSD)

- 2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- 3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (See ANSI C63.10 section 14.3.2.2)

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01+S02	☒	☐
	Support		☐	☒

Tested By :

Chris Blair

Date of testing:

11-Sep-19 - 25-Sep-19

Test Result : PASS**Test Equipment**

See Appendix C for list of test equipment



Power Spectral Density

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Duty Cycle Correction (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
5260	Non HT20, 6 to 54 Mbps	1	13	0.1				0.0	0.1	4.0	3.86
	Non HT20, 6 to 54 Mbps	2	13	0.1	0.9			0.0	3.6	4.0	0.43
	Non HT20, 6 to 54 Mbps	3	13	-1.8	-1.3	-1.8		0.0	3.2	4.0	0.81
	Non HT20, 6 to 54 Mbps	4	13	-3.1	-2.1	-2.9	-3.4	0.0	3.2	4.0	0.78
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-0.9	-0.3			0.0	2.5	4.0	1.54
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-4.9	-4.2	-5.3		0.0	0.0	2.0	1.96
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-6.7	-6.2	-6.9	-7.4	0.0	-0.7	1.0	1.71
	HT/VHT20, M0 to M7	1	13	-0.5				0.1	-0.4	4.0	4.45
	HT/VHT20, M0 to M7	2	13	-0.5	1.8			0.1	3.9	4.0	0.14
	HT/VHT20, M8 to M15	2	13	-0.5	1.8			0.1	3.9	4.0	0.14
	HT/VHT20, M0 to M7	3	13	-1.3	-0.6	-1.0		0.1	3.9	4.0	0.13
	HT/VHT20, M8 to M15	3	13	-1.3	-0.6	-1.0		0.1	3.9	4.0	0.13
	HT/VHT20, M16 to M23	3	13	-1.3	-0.6	-1.0		0.1	3.9	4.0	0.13
	HT/VHT20, M0 to M7	4	13	-3.2	-2.5	-3.2	-3.9	0.1	2.9	4.0	1.10
	HT/VHT20, M8 to M15	4	13	-3.2	-2.5	-3.2	-3.9	0.1	2.9	4.0	1.10
	HT/VHT20, M16 to M23	4	13	-3.2	-2.5	-3.2	-3.9	0.1	2.9	4.0	1.10
	HT/VHT20, M24 to M31	4	13	-3.2	-2.5	-3.2	-3.9	0.1	2.9	4.0	1.10
	HT/VHT20 Beam Forming, M0 to M7	2	13	-1.3	-0.6			0.1	2.1	4.0	1.87
	HT/VHT20 Beam Forming, M8 to M15	2	13	-0.5	1.8			0.1	3.9	4.0	0.14
	HT/VHT20 Beam Forming, M0 to M7	3	15	-5.1	-4.8	-5.7		0.1	-0.4	2.0	2.36
	HT/VHT20 Beam Forming, M8 to M15	3	13	-2.0	-1.0	-2.4		0.1	3.1	4.0	0.94
	HT/VHT20 Beam Forming, M16 to M23	3	13	-1.3	-0.6	-1.0		0.1	3.9	4.0	0.13
	HT/VHT20 Beam Forming, M0 to M7	4	16	-7.2	-6.6	-7.2	-7.8	0.1	-1.1	1.0	2.11
	HT/VHT20 Beam Forming, M8 to M15	4	13	-4.4	-3.6	-4.1	-4.9	0.1	1.8	4.0	2.15
	HT/VHT20 Beam Forming, M16 to M23	4	13	-3.2	-2.5	-3.2	-3.9	0.1	2.9	4.0	1.10
	HT/VHT20 Beam Forming, M24 to M31	4	13	-3.2	-2.5	-3.2	-3.9	0.1	2.9	4.0	1.10
	HT/VHT20 STBC, M0 to M7	2	13	-0.5	1.8			0.1	3.9	4.0	0.14
	HT/VHT20 STBC, M0 to M7	3	13	-2.0	-1.0	-2.4		0.1	3.1	4.0	0.94
	HT/VHT20 STBC, M0 to M7	4	13	-4.4	-3.6	-4.1	-4.9	0.1	1.8	4.0	2.15
	HE20, M0 to M9 1ss	1	13	-0.3				0.1	-0.2	4.0	4.23



	HE20, M0 to M9 1ss	2	13	-0.3	0.5			0.1	3.2	4.0	0.80
	HE20, M0 to M9 2ss	2	13	-0.3	0.5			0.1	3.2	4.0	0.80
	HE20, M0 to M9 1ss	3	13	-2.1	-1.3	-2.2		0.1	3.0	4.0	1.01
	HE20, M0 to M9 2ss	3	13	-2.1	-1.3	-2.2		0.1	3.0	4.0	1.01
	HE20, M0 to M9 3ss	3	13	-2.1	-1.3	-2.2		0.1	3.0	4.0	1.01
	HE20, M0 to M9 1ss	4	13	-3.3	-2.5	-3.0	-3.6	0.1	3.0	4.0	0.99
	HE20, M0 to M9 2ss	4	13	-3.3	-2.5	-3.0	-3.6	0.1	3.0	4.0	0.99
	HE20, M0 to M9 3ss	4	13	-3.3	-2.5	-3.0	-3.6	0.1	3.0	4.0	0.99
	HE20, M0 to M9 4ss	4	13	-3.3	-2.5	-3.0	-3.6	0.1	3.0	4.0	0.99
	HE20 Beam Forming, M0 to M9 1ss	2	13	-1.3	-0.5			0.1	2.2	4.0	1.80
	HE20 Beam Forming, M0 to M9 2ss	2	13	-0.3	0.5			0.1	3.2	4.0	0.80
	HE20 Beam Forming, M0 to M9 1ss	3	15	-5.1	-4.7	-5.1		0.1	-0.1	2.0	2.12
	HE20 Beam Forming, M0 to M9 2ss	3	13	-2.1	-1.3	-2.2		0.1	3.0	4.0	1.01
	HE20 Beam Forming, M0 to M9 3ss	3	13	-2.1	-1.3	-2.2		0.1	3.0	4.0	1.01
	HE20 Beam Forming, M0 to M9 1ss	4	16	-6.9	-6.5	-7.4	-7.8	0.1	-1.0	1.0	2.03
	HE20 Beam Forming, M0 to M9 2ss	4	13	-3.8	-3.2	-4.2	-4.4	0.1	2.2	4.0	1.78
	HE20 Beam Forming, M0 to M9 3ss	4	13	-3.3	-2.5	-3.0	-3.6	0.1	3.0	4.0	0.99
	HE20 Beam Forming, M0 to M9 4ss	4	13	-3.3	-2.5	-3.0	-3.6	0.1	3.0	4.0	0.99
	HE20 STBC, M0 to M9 2ss	2	13	-0.3	0.5			0.1	3.2	4.0	0.80
	HE20 STBC, M0 to M9 2ss	3	13	-2.1	-1.3	-2.2		0.1	3.0	4.0	1.01
	HE20 STBC, M0 to M9 2ss	4	13	-3.8	-3.2	-4.2	-4.4	0.1	2.2	4.0	1.78
5270	Non HT40, 6 to 54 Mbps	1	13	-3.2				0.0	-3.2	4.0	7.16
	Non HT40, 6 to 54 Mbps	2	13	-3.2	-0.6			0.0	1.3	4.0	2.65
	Non HT40, 6 to 54 Mbps	3	13	-3.2	-2.7	-2.5		0.0	2.0	4.0	1.98
	Non HT40, 6 to 54 Mbps	4	13	-3.9	-3.0	-3.6	-4.0	0.0	2.5	4.0	1.54
	HT/VHT40, M0 to M7	1	13	-3.5				0.1	-3.4	4.0	7.40
	HT/VHT40, M0 to M7	2	13	-3.5	-0.9			0.1	1.1	4.0	2.90
	HT/VHT40, M8 to M15	2	13	-3.5	-0.9			0.1	1.1	4.0	2.90
	HT/VHT40, M0 to M7	3	13	-3.5	-2.6	-2.6		0.1	2.0	4.0	2.01
	HT/VHT40, M8 to M15	3	13	-3.5	-2.6	-2.6		0.1	2.0	4.0	2.01
	HT/VHT40, M16 to M23	3	13	-3.5	-2.6	-2.6		0.1	2.0	4.0	2.01
	HT/VHT40, M0 to M7	4	13	-4.6	-3.8	-3.7	-4.3	0.1	2.0	4.0	1.96
	HT/VHT40, M8 to M15	4	13	-4.6	-3.8	-3.7	-4.3	0.1	2.0	4.0	1.96
	HT/VHT40, M16 to M23	4	13	-4.6	-3.8	-3.7	-4.3	0.1	2.0	4.0	1.96
	HT/VHT40, M24 to M31	4	13	-4.6	-3.8	-3.7	-4.3	0.1	2.0	4.0	1.96
	HT/VHT40 Beam Forming, M0 to M7	2	13	-4.6	-3.8			0.1	-1.1	4.0	5.07
	HT/VHT40 Beam Forming, M8 to M15	2	13	-3.5	-0.9			0.1	1.1	4.0	2.90
	HT/VHT40 Beam Forming, M0 to M7	3	15	-8.4	-8.1	-8.0		0.1	-3.3	2.0	5.29
	HT/VHT40 Beam Forming, M8 to M15	3	13	-5.1	-4.8	-5.2		0.1	-0.2	4.0	4.16
	HT/VHT40 Beam Forming, M16 to M23	3	13	-3.5	-2.6	-2.6		0.1	2.0	4.0	2.01
	HT/VHT40 Beam Forming, M0 to M7	4	16	-10.0	-10.2	-10.4	-10.7	0.1	-4.2	1.0	5.19



	HT/VHT40 Beam Forming, M8 to M15	4	13	-7.1	-7.1	-6.7	-7.7	0.1	-1.0	4.0	5.01
	HT/VHT40 Beam Forming, M16 to M23	4	13	-5.1	-4.8	-5.2	-5.3	0.1	1.0	4.0	2.97
	HT/VHT40 Beam Forming, M24 to M31	4	13	-4.6	-3.8	-3.7	-4.3	0.1	2.0	4.0	1.96
	HT/VHT40 STBC, M0 to M7	2	13	-3.5	-0.9			0.1	1.1	4.0	2.90
	HT/VHT40 STBC, M0 to M7	3	13	-5.1	-4.8	-5.2		0.1	-0.2	4.0	4.16
	HT/VHT40 STBC, M0 to M7	4	13	-7.1	-7.1	-6.7	-7.7	0.1	-1.0	4.0	5.01
	HE40, M0 to M9 1ss	1	13	-3.2				0.1	-3.1	4.0	7.07
	HE40, M0 to M9 1ss	2	13	-3.2	-0.7			0.1	1.4	4.0	2.63
	HE40, M0 to M9 2ss	2	13	-3.2	-0.7			0.1	1.4	4.0	2.63
	HE40, M0 to M9 1ss	3	13	-3.2	-3.2	-2.9		0.1	1.8	4.0	2.20
	HE40, M0 to M9 2ss	3	13	-3.2	-3.2	-2.9		0.1	1.8	4.0	2.20
	HE40, M0 to M9 3ss	3	13	-3.2	-3.2	-2.9		0.1	1.8	4.0	2.20
	HE40, M0 to M9 1ss	4	13	-4.1	-3.7	-4.1	-3.8	0.1	2.2	4.0	1.77
	HE40, M0 to M9 2ss	4	13	-4.1	-3.7	-4.1	-3.8	0.1	2.2	4.0	1.77
	HE40, M0 to M9 3ss	4	13	-4.1	-3.7	-4.1	-3.8	0.1	2.2	4.0	1.77
	HE40, M0 to M9 4ss	4	13	-4.1	-3.7	-4.1	-3.8	0.1	2.2	4.0	1.77
	HE40 Beam Forming, M0 to M9 1ss	2	13	-4.1	-3.7			0.1	-0.8	4.0	4.76
	HE40 Beam Forming, M0 to M9 2ss	2	13	-3.2	-0.7			0.1	1.4	4.0	2.63
	HE40 Beam Forming, M0 to M9 1ss	3	15	-8.1	-8.1	-8.3		0.1	-3.3	2.0	5.26
	HE40 Beam Forming, M0 to M9 2ss	3	13	-5.5	-4.7	-4.9		0.1	-0.1	4.0	4.12
	HE40 Beam Forming, M0 to M9 3ss	3	13	-3.2	-3.2	-2.9		0.1	1.8	4.0	2.20
	HE40 Beam Forming, M0 to M9 1ss	4	16	-10.3	-9.8	-10.0	-10.8	0.1	-4.1	1.0	5.06
	HE40 Beam Forming, M0 to M9 2ss	4	13	-7.0	-7.1	-7.0	-7.3	0.1	-0.9	4.0	4.95
	HE40 Beam Forming, M0 to M9 3ss	4	13	-5.5	-4.7	-4.9	-5.4	0.1	1.0	4.0	2.96
	HE40 Beam Forming, M0 to M9 4ss	4	13	-4.1	-3.7	-4.1	-3.8	0.1	2.2	4.0	1.77
	HE40 STBC, M0 to M9 2ss	2	13	-3.2	-0.7			0.1	1.4	4.0	2.63
	HE40 STBC, M0 to M9 2ss	3	13	-5.5	-4.7	-4.9		0.1	-0.1	4.0	4.12
	HE40 STBC, M0 to M9 2ss	4	13	-7.0	-7.1	-7.0	-7.3	0.1	-0.9	4.0	4.95
5290	Non HT80, 6 to 54 Mbps	1	13	-9.3				0.1	-9.2	4.0	13.25
	Non HT80, 6 to 54 Mbps	2	13	-9.3	-10.1			0.1	-6.6	4.0	10.62
	Non HT80, 6 to 54 Mbps	3	13	-10.0	-10.7	-10.3		0.1	-5.5	4.0	9.50
	Non HT80, 6 to 54 Mbps	4	13	-11.4	-12.1	-12.0	-12.5	0.1	-5.9	4.0	9.91
	VHT80, M0 to M9 1ss	1	13	-9.4				0.2	-9.2	4.0	13.18
	VHT80, M0 to M9 1ss	2	13	-10.2	-10.8			0.2	-7.3	4.0	11.26
	VHT80, M0 to M9 2ss	2	13	-10.2	-10.8			0.2	-7.3	4.0	11.26
	VHT80, M0 to M9 1ss	3	13	-10.2	-10.8	-10.6		0.2	-5.5	4.0	9.54
	VHT80, M0 to M9 2ss	3	13	-10.2	-10.8	-10.6		0.2	-5.5	4.0	9.54
	VHT80, M0 to M9 3ss	3	13	-10.2	-10.8	-10.6		0.2	-5.5	4.0	9.54
	VHT80, M0 to M9 1ss	4	13	-11.3	-11.6	-11.0	-12.3	0.2	-5.3	4.0	9.29
	VHT80, M0 to M9 2ss	4	13	-11.3	-11.6	-11.0	-12.3	0.2	-5.3	4.0	9.29
	VHT80, M0 to M9 3ss	4	13	-11.3	-11.6	-11.0	-12.3	0.2	-5.3	4.0	9.29



	VHT80, M0 to M9 4ss	4	13	-11.3	-11.6	-11.0	-12.3	0.2	-5.3	4.0	9.29
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-10.2	-10.8			0.2	-7.3	4.0	11.26
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-10.2	-10.8			0.2	-7.3	4.0	11.26
	VHT80 Beam Forming, M0 to M9 1ss	3	15	-12.1	-12.5	-12.3		0.2	-7.3	2.0	9.31
	VHT80 Beam Forming, M0 to M9 2ss	3	13	-10.2	-10.8	-10.6		0.2	-5.5	4.0	9.54
	VHT80 Beam Forming, M0 to M9 3ss	3	13	-10.2	-10.8	-10.6		0.2	-5.5	4.0	9.54
	VHT80 Beam Forming, M0 to M9 1ss	4	16	-12.9	-13.7	-13.7	-14.2	0.2	-7.4	1.0	8.36
	VHT80 Beam Forming, M0 to M9 2ss	4	13	-11.3	-11.6	-11.0	-12.3	0.2	-5.3	4.0	9.29
	VHT80 Beam Forming, M0 to M9 3ss	4	13	-11.3	-11.6	-11.0	-12.3	0.2	-5.3	4.0	9.29
	VHT80 Beam Forming, M0 to M9 4ss	4	13	-11.3	-11.6	-11.0	-12.3	0.2	-5.3	4.0	9.29
	VHT80 STBC, M0 to M9 1ss	2	13	-10.2	-10.8			0.2	-7.3	4.0	11.26
	VHT80 STBC, M0 to M9 1ss	3	13	-10.2	-10.8	-10.6		0.2	-5.5	4.0	9.54
	VHT80 STBC, M0 to M9 1ss	4	13	-11.3	-11.6	-11.0	-12.3	0.2	-5.3	4.0	9.29
	HE80, M0 to M9 1ss	1	13	-10.0				0.3	-9.7	4.0	13.74
	HE80, M0 to M9 1ss	2	13	-10.0	-10.8			0.3	-7.1	4.0	11.11
	HE80, M0 to M9 2ss	2	13	-10.0	-10.8			0.3	-7.1	4.0	11.11
	HE80, M0 to M9 1ss	3	13	-11.0	-11.5	-11.4		0.3	-6.3	4.0	10.26
	HE80, M0 to M9 2ss	3	13	-11.0	-11.5	-11.4		0.3	-6.3	4.0	10.26
	HE80, M0 to M9 3ss	3	13	-11.0	-11.5	-11.4		0.3	-6.3	4.0	10.26
	HE80, M0 to M9 1ss	4	13	-11.0	-11.5	-11.4	-12.3	0.3	-5.2	4.0	9.24
	HE80, M0 to M9 2ss	4	13	-11.0	-11.5	-11.4	-12.3	0.3	-5.2	4.0	9.24
	HE80, M0 to M9 3ss	4	13	-11.0	-11.5	-11.4	-12.3	0.3	-5.2	4.0	9.24
	HE80, M0 to M9 4ss	4	13	-11.0	-11.5	-11.4	-12.3	0.3	-5.2	4.0	9.24
	HE80 Beam Forming, M0 to M9 1ss	2	13	-10.0	-10.8			0.3	-7.1	4.0	11.11
	HE80 Beam Forming, M0 to M9 2ss	2	13	-10.0	-10.8			0.3	-7.1	4.0	11.11
	HE80 Beam Forming, M0 to M9 1ss	3	15	-12.0	-12.9	-12.3		0.3	-7.4	2.0	9.35
	HE80 Beam Forming, M0 to M9 2ss	3	13	-11.0	-11.5	-11.4		0.3	-6.3	4.0	10.26
	HE80 Beam Forming, M0 to M9 3ss	3	13	-11.0	-11.5	-11.4		0.3	-6.3	4.0	10.26
	HE80 Beam Forming, M0 to M9 1ss	4	16	-13.2	-13.3	-13.7	-14.2	0.3	-7.3	1.0	8.30
	HE80 Beam Forming, M0 to M9 2ss	4	13	-11.0	-11.5	-11.4	-12.3	0.3	-5.2	4.0	9.24
	HE80 Beam Forming, M0 to M9 3ss	4	13	-11.0	-11.5	-11.4	-12.3	0.3	-5.2	4.0	9.24
	HE80 Beam Forming, M0 to M9 4ss	4	13	-11.0	-11.5	-11.4	-12.3	0.3	-5.2	4.0	9.24
	HE80 STBC, M0 to M9 1ss	2	13	-10.0	-10.8			0.3	-7.1	4.0	11.11
	HE80 STBC, M0 to M9 1ss	3	13	-11.0	-11.5	-11.4		0.3	-6.3	4.0	10.26
	HE80 STBC, M0 to M9 1ss	4	13	-11.0	-11.5	-11.4	-12.3	0.3	-5.2	4.0	9.24
5300	Non HT20, 6 to 54 Mbps	1	13	0.2				0.0	0.2	4.0	3.76
	Non HT20, 6 to 54 Mbps	2	13	0.2	1.0			0.0	3.7	4.0	0.33
	Non HT20, 6 to 54 Mbps	3	13	-1.3	-1.4	-1.7		0.0	3.4	4.0	0.65
	Non HT20, 6 to 54 Mbps	4	13	-2.4	-2.1	-2.6	-3.8	0.0	3.4	4.0	0.61
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-0.8	0.0			0.0	2.7	4.0	1.33
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-4.4	-4.5	-4.8		0.0	0.3	2.0	1.75



Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-6.6	-6.5	-6.4	-7.3	0.0	-0.6	1.0	1.62
HT/VHT20, M0 to M7	1	13	-0.2				0.1	-0.1	4.0	4.15
HT/VHT20, M0 to M7	2	13	-0.2	1.4			0.1	3.7	4.0	0.26
HT/VHT20, M8 to M15	2	13	-0.2	1.4			0.1	3.7	4.0	0.26
HT/VHT20, M0 to M7	3	13	-1.7	-1.3	-2.0		0.1	3.2	4.0	0.83
HT/VHT20, M8 to M15	3	13	-1.7	-1.3	-2.0		0.1	3.2	4.0	0.83
HT/VHT20, M16 to M23	3	13	-1.7	-1.3	-2.0		0.1	3.2	4.0	0.83
HT/VHT20, M0 to M7	4	13	-2.7	-2.5	-2.9	-3.7	0.1	3.1	4.0	0.85
HT/VHT20, M8 to M15	4	13	-2.7	-2.5	-2.9	-3.7	0.1	3.1	4.0	0.85
HT/VHT20, M16 to M23	4	13	-2.7	-2.5	-2.9	-3.7	0.1	3.1	4.0	0.85
HT/VHT20, M24 to M31	4	13	-2.7	-2.5	-2.9	-3.7	0.1	3.1	4.0	0.85
HT/VHT20 Beam Forming, M0 to M7	2	13	-1.0	-0.6			0.1	2.3	4.0	1.73
HT/VHT20 Beam Forming, M8 to M15	2	13	-0.2	1.4			0.1	3.7	4.0	0.26
HT/VHT20 Beam Forming, M0 to M7	3	15	-4.8	-4.7	-5.3		0.1	-0.1	2.0	2.10
HT/VHT20 Beam Forming, M8 to M15	3	13	-1.7	-1.3	-2.0		0.1	3.2	4.0	0.83
HT/VHT20 Beam Forming, M16 to M23	3	13	-1.7	-1.3	-2.0		0.1	3.2	4.0	0.83
HT/VHT20 Beam Forming, M0 to M7	4	16	-7.0	-6.9	-7.2	-8.2	0.1	-1.2	1.0	2.22
HT/VHT20 Beam Forming, M8 to M15	4	13	-4.1	-3.8	-4.2	-4.8	0.1	1.9	4.0	2.14
HT/VHT20 Beam Forming, M16 to M23	4	13	-2.7	-2.5	-2.9	-3.7	0.1	3.1	4.0	0.85
HT/VHT20 Beam Forming, M24 to M31	4	13	-2.7	-2.5	-2.9	-3.7	0.1	3.1	4.0	0.85
HT/VHT20 STBC, M0 to M7	2	13	-0.2	1.4			0.1	3.7	4.0	0.26
HT/VHT20 STBC, M0 to M7	3	13	-1.7	-1.3	-2.0		0.1	3.2	4.0	0.83
HT/VHT20 STBC, M0 to M7	4	13	-4.1	-3.8	-4.2	-4.8	0.1	1.9	4.0	2.14
HE20, M0 to M9 1ss	1	13	0.1				0.1	0.2	4.0	3.83
HE20, M0 to M9 1ss	2	13	0.1	1.4			0.1	3.9	4.0	0.12
HE20, M0 to M9 2ss	2	13	0.1	1.4			0.1	3.9	4.0	0.12
HE20, M0 to M9 1ss	3	13	-1.8	-1.6	-2.1		0.1	3.0	4.0	0.99
HE20, M0 to M9 2ss	3	13	-1.8	-1.6	-2.1		0.1	3.0	4.0	0.99
HE20, M0 to M9 3ss	3	13	-1.8	-1.6	-2.1		0.1	3.0	4.0	0.99
HE20, M0 to M9 1ss	4	13	-2.9	-2.4	-2.6	-3.7	0.1	3.2	4.0	0.78
HE20, M0 to M9 2ss	4	13	-2.9	-2.4	-2.6	-3.7	0.1	3.2	4.0	0.78
HE20, M0 to M9 3ss	4	13	-2.9	-2.4	-2.6	-3.7	0.1	3.2	4.0	0.78
HE20, M0 to M9 4ss	4	13	-2.9	-2.4	-2.6	-3.7	0.1	3.2	4.0	0.78
HE20 Beam Forming, M0 to M9 1ss	2	13	-0.6	-0.7			0.1	2.4	4.0	1.57
HE20 Beam Forming, M0 to M9 2ss	2	13	0.1	1.4			0.1	3.9	4.0	0.12
HE20 Beam Forming, M0 to M9 1ss	3	15	-4.5	-4.7	-5.1		0.1	0.1	2.0	1.92
HE20 Beam Forming, M0 to M9 2ss	3	13	-1.8	-1.6	-2.1		0.1	3.0	4.0	0.99
HE20 Beam Forming, M0 to M9 3ss	3	13	-1.8	-1.6	-2.1		0.1	3.0	4.0	0.99
HE20 Beam Forming, M0 to M9 1ss	4	16	-6.8	-6.7	-7.1	-8.0	0.1	-1.0	1.0	2.03
HE20 Beam Forming, M0 to M9 2ss	4	13	-3.7	-3.7	-3.9	-4.7	0.1	2.1	4.0	1.89
HE20 Beam Forming, M0 to M9 3ss	4	13	-2.9	-2.4	-2.6	-3.7	0.1	3.2	4.0	0.78
HE20 Beam Forming, M0 to M9 4ss	4	13	-2.9	-2.4	-2.6	-3.7	0.1	3.2	4.0	0.78



	HE20 STBC, M0 to M9 2ss	2	13	0.1	1.4			0.1	3.9	4.0	0.12
	HE20 STBC, M0 to M9 2ss	3	13	-1.8	-1.6	-2.1		0.1	3.0	4.0	0.99
	HE20 STBC, M0 to M9 2ss	4	13	-3.7	-3.7	-3.9	-4.7	0.1	2.1	4.0	1.89
5310	Non HT40, 6 to 54 Mbps	1	13	-5.6				0.0	-5.6	4.0	9.56
	Non HT40, 6 to 54 Mbps	2	13	-5.6	-5.8			0.0	-2.6	4.0	6.64
	Non HT40, 6 to 54 Mbps	3	13	-6.6	-6.8	-6.8		0.0	-1.9	4.0	5.92
	Non HT40, 6 to 54 Mbps	4	13	-6.6	-6.8	-6.8	-7.5	0.0	-0.8	4.0	4.85
	HT/VHT40, M0 to M7	1	13	-6.1				0.1	-6.0	4.0	10.00
	HT/VHT40, M0 to M7	2	13	-6.1	-6.3			0.1	-3.1	4.0	7.09
	HT/VHT40, M8 to M15	2	13	-6.1	-6.3			0.1	-3.1	4.0	7.09
	HT/VHT40, M0 to M7	3	13	-7.4	-7.1	-7.3		0.1	-2.4	4.0	6.39
	HT/VHT40, M8 to M15	3	13	-7.4	-7.1	-7.3		0.1	-2.4	4.0	6.39
	HT/VHT40, M16 to M23	3	13	-7.4	-7.1	-7.3		0.1	-2.4	4.0	6.39
	HT/VHT40, M0 to M7	4	13	-7.4	-7.1	-7.3	-7.7	0.1	-1.2	4.0	5.25
	HT/VHT40, M8 to M15	4	13	-7.4	-7.1	-7.3	-7.7	0.1	-1.2	4.0	5.25
	HT/VHT40, M16 to M23	4	13	-7.4	-7.1	-7.3	-7.7	0.1	-1.2	4.0	5.25
	HT/VHT40, M24 to M31	4	13	-7.4	-7.1	-7.3	-7.7	0.1	-1.2	4.0	5.25
	HT/VHT40 Beam Forming, M0 to M7	2	13	-6.1	-6.3			0.1	-3.1	4.0	7.09
	HT/VHT40 Beam Forming, M8 to M15	2	13	-6.1	-6.3			0.1	-3.1	4.0	7.09
	HT/VHT40 Beam Forming, M0 to M7	3	15	-8.3	-8.3	-8.1		0.1	-3.4	2.0	5.36
	HT/VHT40 Beam Forming, M8 to M15	3	13	-7.4	-7.1	-7.3		0.1	-2.4	4.0	6.39
	HT/VHT40 Beam Forming, M16 to M23	3	13	-7.4	-7.1	-7.3		0.1	-2.4	4.0	6.39
	HT/VHT40 Beam Forming, M0 to M7	4	16	-10.1	-9.6	-10.1	-11.1	0.1	-4.1	1.0	5.07
	HT/VHT40 Beam Forming, M8 to M15	4	13	-7.4	-7.1	-7.3	-7.7	0.1	-1.2	4.0	5.25
	HT/VHT40 Beam Forming, M16 to M23	4	13	-7.4	-7.1	-7.3	-7.7	0.1	-1.2	4.0	5.25
	HT/VHT40 Beam Forming, M24 to M31	4	13	-7.4	-7.1	-7.3	-7.7	0.1	-1.2	4.0	5.25
	HT/VHT40 STBC, M0 to M7	2	13	-6.1	-6.3			0.1	-3.1	4.0	7.09
	HT/VHT40 STBC, M0 to M7	3	13	-7.4	-7.1	-7.3		0.1	-2.4	4.0	6.39
	HT/VHT40 STBC, M0 to M7	4	13	-7.4	-7.1	-7.3	-7.7	0.1	-1.2	4.0	5.25
	HE40, M0 to M9 1ss	1	13	-6.2				0.1	-6.1	4.0	10.07
	HE40, M0 to M9 1ss	2	13	-6.9	-6.8			0.1	-3.7	4.0	7.71
	HE40, M0 to M9 2ss	2	13	-6.9	-6.8			0.1	-3.7	4.0	7.71
	HE40, M0 to M9 1ss	3	13	-6.9	-6.8	-7.0		0.1	-2.0	4.0	6.00
	HE40, M0 to M9 2ss	3	13	-6.9	-6.8	-7.0		0.1	-2.0	4.0	6.00
	HE40, M0 to M9 3ss	3	13	-6.9	-6.8	-7.0		0.1	-2.0	4.0	6.00
	HE40, M0 to M9 1ss	4	13	-8.0	-8.1	-7.9	-9.0	0.1	-2.1	4.0	6.08
	HE40, M0 to M9 2ss	4	13	-8.0	-8.1	-7.9	-9.0	0.1	-2.1	4.0	6.08
	HE40, M0 to M9 3ss	4	13	-8.0	-8.1	-7.9	-9.0	0.1	-2.1	4.0	6.08
	HE40, M0 to M9 4ss	4	13	-8.0	-8.1	-7.9	-9.0	0.1	-2.1	4.0	6.08
	HE40 Beam Forming, M0 to M9 1ss	2	13	-6.9	-6.8			0.1	-3.7	4.0	7.71
	HE40 Beam Forming, M0 to M9 2ss	2	13	-6.9	-6.8			0.1	-3.7	4.0	7.71



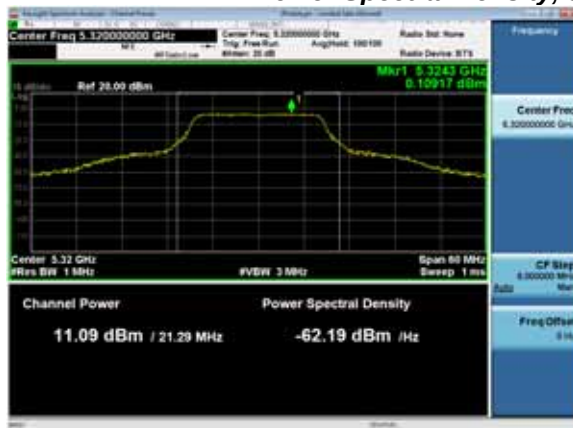
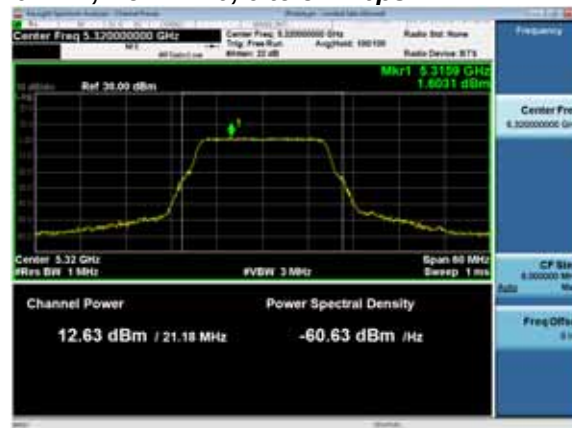
	HE40 Beam Forming, M0 to M9 1ss	3	15	-8.0	-8.1	-7.9		0.1	-3.1	2.0	5.10
	HE40 Beam Forming, M0 to M9 2ss	3	13	-6.9	-6.8	-7.0		0.1	-2.0	4.0	6.00
	HE40 Beam Forming, M0 to M9 3ss	3	13	-6.9	-6.8	-7.0		0.1	-2.0	4.0	6.00
	HE40 Beam Forming, M0 to M9 1ss	4	16	-9.8	-10.0	-9.9	-11.2	0.1	-4.0	1.0	5.04
	HE40 Beam Forming, M0 to M9 2ss	4	13	-8.0	-8.1	-7.9	-9.0	0.1	-2.1	4.0	6.08
	HE40 Beam Forming, M0 to M9 3ss	4	13	-8.0	-8.1	-7.9	-9.0	0.1	-2.1	4.0	6.08
	HE40 Beam Forming, M0 to M9 4ss	4	13	-8.0	-8.1	-7.9	-9.0	0.1	-2.1	4.0	6.08
	HE40 STBC, M0 to M9 2ss	2	13	-6.9	-6.8			0.1	-3.7	4.0	7.71
	HE40 STBC, M0 to M9 2ss	3	13	-6.9	-6.8	-7.0		0.1	-2.0	4.0	6.00
	HE40 STBC, M0 to M9 2ss	4	13	-8.0	-8.1	-7.9	-9.0	0.1	-2.1	4.0	6.08
5320	Non HT20, 6 to 54 Mbps	1	13	0.1				0.0	0.1	4.0	3.86
	Non HT20, 6 to 54 Mbps	2	13	0.1	1.6			0.0	4.0	4.0	0.03
	Non HT20, 6 to 54 Mbps	3	13	-1.6	-1.4	-1.8		0.0	3.2	4.0	0.78
	Non HT20, 6 to 54 Mbps	4	13	-2.7	-2.3	-2.8	-4.1	0.0	3.1	4.0	0.86
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-0.7	0.1			0.0	2.8	4.0	1.23
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-4.7	-4.5	-5.0		0.0	0.1	2.0	1.91
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-6.6	-6.5	-6.8	-8.1	0.0	-0.9	1.0	1.89
	HT/VHT20, M0 to M7	1	13	-0.4				0.1	-0.3	4.0	4.35
	HT/VHT20, M0 to M7	2	13	-0.4	1.3			0.1	3.6	4.0	0.40
	HT/VHT20, M8 to M15	2	13	-0.4	1.3			0.1	3.6	4.0	0.40
	HT/VHT20, M0 to M7	3	13	-1.3	-0.5	-1.1		0.1	3.9	4.0	0.13
	HT/VHT20, M8 to M15	3	13	-1.3	-0.5	-1.1		0.1	3.9	4.0	0.13
	HT/VHT20, M16 to M23	3	13	-1.3	-0.5	-1.1		0.1	3.9	4.0	0.13
	HT/VHT20, M0 to M7	4	13	-2.2	-1.7	-2.0	-3.3	0.1	3.8	4.0	0.19
	HT/VHT20, M8 to M15	4	13	-2.2	-1.7	-2.0	-3.3	0.1	3.8	4.0	0.19
	HT/VHT20, M16 to M23	4	13	-2.2	-1.7	-2.0	-3.3	0.1	3.8	4.0	0.19
	HT/VHT20, M24 to M31	4	13	-2.2	-1.7	-2.0	-3.3	0.1	3.8	4.0	0.19
	HT/VHT20 Beam Forming, M0 to M7	2	13	-1.3	-0.5			0.1	2.2	4.0	1.82
	HT/VHT20 Beam Forming, M8 to M15	2	13	-0.4	1.3			0.1	3.6	4.0	0.40
	HT/VHT20 Beam Forming, M0 to M7	3	15	-5.0	-4.6	-5.0		0.1	0.0	2.0	2.04
	HT/VHT20 Beam Forming, M8 to M15	3	13	-2.2	-1.7	-2.0		0.1	2.9	4.0	1.14
	HT/VHT20 Beam Forming, M16 to M23	3	13	-1.3	-0.5	-1.1		0.1	3.9	4.0	0.13
	HT/VHT20 Beam Forming, M0 to M7	4	16	-7.2	-7.0	-7.5	-8.6	0.1	-1.5	1.0	2.46
	HT/VHT20 Beam Forming, M8 to M15	4	13	-3.6	-3.6	-4.2	-5.1	0.1	2.0	4.0	2.01
	HT/VHT20 Beam Forming, M16 to M23	4	13	-2.2	-1.7	-2.0	-3.3	0.1	3.8	4.0	0.19
	HT/VHT20 Beam Forming, M24 to M31	4	13	-2.2	-1.7	-2.0	-3.3	0.1	3.8	4.0	0.19
	HT/VHT20 STBC, M0 to M7	2	13	-0.4	1.3			0.1	3.6	4.0	0.40
	HT/VHT20 STBC, M0 to M7	3	13	-2.2	-1.7	-2.0		0.1	2.9	4.0	1.14
	HT/VHT20 STBC, M0 to M7	4	13	-3.6	-3.6	-4.2	-5.1	0.1	2.0	4.0	2.01
	HE20, M0 to M9 1ss	1	13	-0.4				0.1	-0.3	4.0	4.33
	HE20, M0 to M9 1ss	2	13	-0.4	1.4			0.1	3.7	4.0	0.33



	HE20, M0 to M9 2ss	2	13	-0.4	1.4			0.1	3.7	4.0	0.33
	HE20, M0 to M9 1ss	3	13	-1.3	-0.7	-0.8		0.1	3.9	4.0	0.08
	HE20, M0 to M9 2ss	3	13	-1.3	-0.7	-0.8		0.1	3.9	4.0	0.08
	HE20, M0 to M9 3ss	3	13	-1.3	-0.7	-0.8		0.1	3.9	4.0	0.08
	HE20, M0 to M9 1ss	4	13	-2.3	-2.1	-2.2	-3.5	0.1	3.6	4.0	0.40
	HE20, M0 to M9 2ss	4	13	-2.3	-2.1	-2.2	-3.5	0.1	3.6	4.0	0.40
	HE20, M0 to M9 3ss	4	13	-2.3	-2.1	-2.2	-3.5	0.1	3.6	4.0	0.40
	HE20, M0 to M9 4ss	4	13	-2.3	-2.1	-2.2	-3.5	0.1	3.6	4.0	0.40
	HE20 Beam Forming, M0 to M9 1ss	2	13	-1.3	-0.7			0.1	2.1	4.0	1.91
	HE20 Beam Forming, M0 to M9 2ss	2	13	-0.4	1.4			0.1	3.7	4.0	0.33
	HE20 Beam Forming, M0 to M9 1ss	3	15	-5.0	-4.5	-5.4		0.1	-0.1	2.0	2.11
	HE20 Beam Forming, M0 to M9 2ss	3	13	-2.3	-2.1	-2.2		0.1	2.6	4.0	1.36
	HE20 Beam Forming, M0 to M9 3ss	3	13	-1.3	-0.7	-0.8		0.1	3.9	4.0	0.08
	HE20 Beam Forming, M0 to M9 1ss	4	16	-7.1	-6.7	-7.3	-8.6	0.1	-1.3	1.0	2.28
	HE20 Beam Forming, M0 to M9 2ss	4	13	-4.5	-3.7	-4.3	-5.4	0.1	1.7	4.0	2.34
	HE20 Beam Forming, M0 to M9 3ss	4	13	-2.3	-2.1	-2.2	-3.5	0.1	3.6	4.0	0.40
	HE20 Beam Forming, M0 to M9 4ss	4	13	-2.3	-2.1	-2.2	-3.5	0.1	3.6	4.0	0.40
	HE20 STBC, M0 to M9 2ss	2	13	-0.4	1.4			0.1	3.7	4.0	0.33
	HE20 STBC, M0 to M9 2ss	3	13	-2.3	-2.1	-2.2		0.1	2.6	4.0	1.36
	HE20 STBC, M0 to M9 2ss	4	13	-4.5	-3.7	-4.3	-5.4	0.1	1.7	4.0	2.34
5250	Non HT160, 6 to 54 Mbps	1	13	-13.9				0.0	-13.9	4.0	17.85
	Non HT160, 6 to 54 Mbps	2	13	-13.9	-12.8			0.0	-10.3	4.0	14.26
	Non HT160, 6 to 54 Mbps	3	13	-13.9	-12.8	-15.3		0.0	-9.1	4.0	13.06
	Non HT160, 6 to 54 Mbps	4	13	-15.2	-13.4	-15.9	-16.8	0.0	-9.1	4.0	13.07
	VHT160, M0 to M9 1ss	1	13	-13.5				0.4	-13.1	4.0	17.11
	VHT160, M0 to M9 1ss	2	13	-13.5	-14.1			0.4	-10.4	4.0	14.39
	VHT160, M0 to M9 2ss	2	13	-13.5	-14.1			0.4	-10.4	4.0	14.39
	VHT160, M0 to M9 1ss	3	13	-13.5	-14.1	-14.8		0.4	-8.9	4.0	12.94
	VHT160, M0 to M9 2ss	3	13	-13.5	-14.1	-14.8		0.4	-8.9	4.0	12.94
	VHT160, M0 to M9 3ss	3	13	-13.5	-14.1	-14.8		0.4	-8.9	4.0	12.94
	VHT160, M0 to M9 1ss	4	13	-14.4	-14.7	-15.7	-16.5	0.4	-8.8	4.0	12.83
	VHT160, M0 to M9 2ss	4	13	-14.4	-14.7	-15.7	-16.5	0.4	-8.8	4.0	12.83
	VHT160, M0 to M9 3ss	4	13	-14.4	-14.7	-15.7	-16.5	0.4	-8.8	4.0	12.83
	VHT160, M0 to M9 4ss	4	13	-14.4	-14.7	-15.7	-16.5	0.4	-8.8	4.0	12.83
	VHT160 Beam Forming, M0 to M9 1ss	2	13	-13.5	-14.1			0.4	-10.4	4.0	14.39
	VHT160 Beam Forming, M0 to M9 2ss	2	13	-13.5	-14.1			0.4	-10.4	4.0	14.39
	VHT160 Beam Forming, M0 to M9 1ss	3	15	-14.4	-14.7	-15.7		0.4	-9.7	2.0	11.74
	VHT160 Beam Forming, M0 to M9 2ss	3	13	-13.5	-14.1	-14.8		0.4	-8.9	4.0	12.94
	VHT160 Beam Forming, M0 to M9 3ss	3	13	-13.5	-14.1	-14.8		0.4	-8.9	4.0	12.94
	VHT160 Beam Forming, M0 to M9 1ss	4	16	-15.7	-16.3	-16.5	-17.4	0.4	-10.0	1.0	11.02
	VHT160 Beam Forming, M0 to M9 2ss	4	13	-14.4	-14.7	-15.7	-16.5	0.4	-8.8	4.0	12.83



VHT160 Beam Forming, M0 to M9 3ss	4	13	-14.4	-14.7	-15.7	-16.5	0.4	-8.8	4.0	12.83
VHT160 Beam Forming, M0 to M9 4ss	4	13	-14.4	-14.7	-15.7	-16.5	0.4	-8.8	4.0	12.83
VHT160 STBC, M0 to M9 1ss	2	13	-13.5	-14.1			0.4	-10.4	4.0	14.39
VHT160 STBC, M0 to M9 1ss	3	13	-13.5	-14.1	-14.8		0.4	-8.9	4.0	12.94
VHT160 STBC, M0 to M9 1ss	4	13	-14.4	-14.7	-15.7	-16.5	0.4	-8.8	4.0	12.83
HE160, M0 to M9 1ss	1	13	-12.6				0.4	-12.2	4.0	16.17
HE160, M0 to M9 1ss	2	13	-12.6	-13.4			0.4	-9.5	4.0	13.54
HE160, M0 to M9 2ss	2	13	-12.6	-13.4			0.4	-9.5	4.0	13.54
HE160, M0 to M9 1ss	3	13	-13.5	-13.9	-14.3		0.4	-8.7	4.0	12.68
HE160, M0 to M9 2ss	3	13	-13.5	-13.9	-14.3		0.4	-8.7	4.0	12.68
HE160, M0 to M9 3ss	3	13	-13.5	-13.9	-14.3		0.4	-8.7	4.0	12.68
HE160, M0 to M9 1ss	4	13	-13.5	-13.9	-14.3	-14.8	0.4	-7.6	4.0	11.64
HE160, M0 to M9 2ss	4	13	-13.5	-13.9	-14.3	-14.8	0.4	-7.6	4.0	11.64
HE160, M0 to M9 3ss	4	13	-13.5	-13.9	-14.3	-14.8	0.4	-7.6	4.0	11.64
HE160, M0 to M9 4ss	4	13	-13.5	-13.9	-14.3	-14.8	0.4	-7.6	4.0	11.64
HE160 Beam Forming, M0 to M9 1ss	2	13	-12.6	-13.4			0.4	-9.5	4.0	13.54
HE160 Beam Forming, M0 to M9 2ss	2	13	-12.6	-13.4			0.4	-9.5	4.0	13.54
HE160 Beam Forming, M0 to M9 1ss	3	15	-13.5	-13.9	-14.3		0.4	-8.7	2.0	10.68
HE160 Beam Forming, M0 to M9 2ss	3	13	-13.5	-13.9	-14.3		0.4	-8.7	4.0	12.68
HE160 Beam Forming, M0 to M9 3ss	3	13	-13.5	-13.9	-14.3		0.4	-8.7	4.0	12.68
HE160 Beam Forming, M0 to M9 1ss	4	16	-15.5	-15.8	-16.7	-17.0	0.4	-9.8	1.0	10.75
HE160 Beam Forming, M0 to M9 2ss	4	13	-13.5	-13.9	-14.3	-14.8	0.4	-7.6	4.0	11.64
HE160 Beam Forming, M0 to M9 3ss	4	13	-13.5	-13.9	-14.3	-14.8	0.4	-7.6	4.0	11.64
HE160 Beam Forming, M0 to M9 4ss	4	13	-13.5	-13.9	-14.3	-14.8	0.4	-7.6	4.0	11.64
HE160 STBC, M0 to M9 1ss	2	13	-12.6	-13.4			0.4	-9.5	4.0	13.54
HE160 STBC, M0 to M9 1ss	3	13	-13.5	-13.9	-14.3		0.4	-8.7	4.0	12.68
HE160 STBC, M0 to M9 1ss	4	13	-13.5	-13.9	-14.3	-14.8	0.4	-7.6	4.0	11.64

**Power Spectral Density, 5320 MHz, Non HT20, 6 to 54 Mbps****Antenna A****Antenna B**



A.5 Conducted Spurious Emissions

Conducted Spurious Emissions Test Requirement

15.407(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.

Use formula below to substitute conducted measurements in place of radiated measurements

$$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77, \text{ where } E = \text{field strength and } d = 3 \text{ meter}$$

- 1) Average Plot, Limit= -41.25 dBm eirp
- 2) Peak plot, Limit = -21.25 dBm eirp

Conducted Spurious Emissions Test Procedure

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Ref. ANSI C63.10: 2013

Conducted Spurious Emissions	
Test Procedure	
1. Connect the antenna port(s) to the spectrum analyzer input. 2. Place the radio in continuous transmit mode 3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer). 4. Use the peak marker function to determine the maximum spurs amplitude level. 5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. (see ANSI C63.10:2013 section 14.3.2.2) 6. Capture graphs and record pertinent measurement data.	

Ref. ANSI C63.10: 2013 section 12.7.6 (Peak) and 12.7.7.2 (Average)

KDB 789033 D02 General UNII Test Procedures New Rules v02r01, Sec. 5 (Peak), Sec. 6 (Average Method AD)

Conducted Spurious Emissions	
Test parameters	
Peak RBW = 1 MHz VBW ≥ 3 MHz Sweep = Auto	Average RBW = 1 MHz VBW ≥ 3 MHz Sweep = Auto



Detector = Peak Trace = Max Hold.	Detector = RMS Power Averaging
--------------------------------------	-----------------------------------

Add the max antenna gain + ground reflection factor (4.7 dB for frequencies between 30 MHz and 1000 MHz, and 0 dB for frequencies > 1000 MHz).

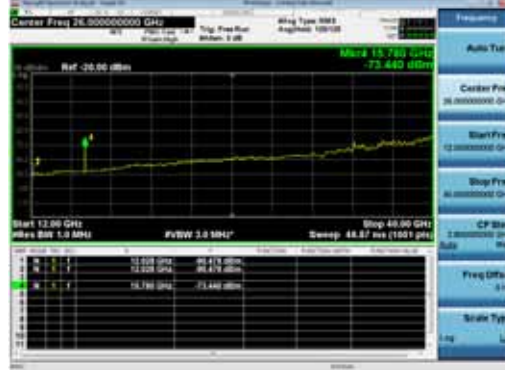
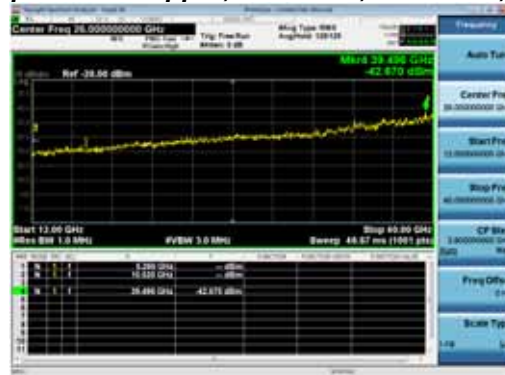
Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01+S02	☒	☐
	Support		☐	☒

Tested By : Chris Blair	Date of testing: 11-Sep-19 - 25-Sep-19
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment

**Conducted Spurs Average Upper, 5260 MHz, Non HT20, 6 to 54 Mbps****Conducted Spurs Peak Upper, 5260 MHz, Non HT20, 6 to 54 Mbps**

Conducted Spurious Emissions Average Table



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle Correction (dB)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5260	Non HT20, 6 to 54 Mbps	1	13	-64.9				0.0	-51.9	-41.25	10.61
	Non HT20, 6 to 54 Mbps	2	13	-64.9	-59.3			0.0	-45.2	-41.25	3.95
	Non HT20, 6 to 54 Mbps	3	13	-66.3	-61.7	-63.1		0.0	-45.5	-41.25	4.24
	Non HT20, 6 to 54 Mbps	4	13	-66.9	-62.0	-63.7	-66.0	0.0	-45.2	-41.25	3.91
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-65.7	-60.7			0.0	-46.5	-41.25	5.21
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-69.0	-63.2	-64.5		0.0	-45.1	-41.25	3.89
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-69.9	-65.6	-67.5	-68.8	0.0	-45.6	-41.25	4.33
	HT/VHT20, M0 to M7	1	13	-65.4				0.1	-52.3	-41.25	11.10
	HT/VHT20, M0 to M7	2	13	-65.4	-58.9			0.1	-45.0	-41.25	3.72
	HT/VHT20, M8 to M15	2	13	-65.4	-58.9			0.1	-45.0	-41.25	3.72
	HT/VHT20, M0 to M7	3	13	-66.2	-61.3	-62.4		0.1	-45.0	-41.25	3.78
	HT/VHT20, M8 to M15	3	13	-66.2	-61.3	-62.4		0.1	-45.0	-41.25	3.78
	HT/VHT20, M16 to M23	3	13	-66.2	-61.3	-62.4		0.1	-45.0	-41.25	3.78
	HT/VHT20, M0 to M7	4	13	-67.5	-62.5	-63.9	-66.6	0.1	-45.6	-41.25	4.34
	HT/VHT20, M8 to M15	4	13	-67.5	-62.5	-63.9	-66.6	0.1	-45.6	-41.25	4.34
	HT/VHT20, M16 to M23	4	13	-67.5	-62.5	-63.9	-66.6	0.1	-45.6	-41.25	4.34
	HT/VHT20, M24 to M31	4	13	-67.5	-62.5	-63.9	-66.6	0.1	-45.6	-41.25	4.34
	HT/VHT20 Beam Forming, M0 to M7	2	13	-66.2	-61.3			0.1	-47.0	-41.25	5.78
	HT/VHT20 Beam Forming, M8 to M15	2	13	-65.4	-58.9			0.1	-45.0	-41.25	3.72
	HT/VHT20 Beam Forming, M0 to M7	3	15	-69.1	-63.4	-64.7		0.1	-45.3	-41.25	4.06
	HT/VHT20 Beam Forming, M8 to M15	3	13	-66.5	-62.0	-63.6		0.1	-45.8	-41.25	4.59
	HT/VHT20 Beam Forming, M16 to M23	3	13	-66.2	-61.3	-62.4		0.1	-45.0	-41.25	3.78
	HT/VHT20 Beam Forming, M0 to M7	4	16	-69.9	-65.9	-67.5	-70.0	0.1	-45.9	-41.25	4.65
	HT/VHT20 Beam Forming, M8 to M15	4	13	-68.7	-63.1	-64.6	-66.8	0.1	-46.2	-41.25	4.98
	HT/VHT20 Beam Forming, M16 to M23	4	13	-67.5	-62.5	-63.9	-66.6	0.1	-45.6	-41.25	4.34
	HT/VHT20 Beam Forming, M24 to M31	4	13	-67.5	-62.5	-63.9	-66.6	0.1	-45.6	-41.25	4.34
	HT/VHT20 STBC, M0 to M7	2	13	-65.4	-58.9			0.1	-45.0	-41.25	3.72
	HT/VHT20 STBC, M0 to M7	3	13	-66.5	-62.0	-63.6		0.1	-45.8	-41.25	4.59
	HT/VHT20 STBC, M0 to M7	4	13	-68.7	-63.1	-64.6	-66.8	0.1	-46.2	-41.25	4.98
	HE20, M0 to M9 1ss	1	13	-65.0				0.1	-51.9	-41.25	10.68



	HE20, M0 to M9 1ss	2	13	-65.0	-59.7			0.1	-45.5	-41.25	4.26
	HE20, M0 to M9 2ss	2	13	-65.0	-59.7			0.1	-45.5	-41.25	4.26
	HE20, M0 to M9 1ss	3	13	-66.3	-61.6	-63.1		0.1	-45.4	-41.25	4.17
	HE20, M0 to M9 2ss	3	13	-66.3	-61.6	-63.1		0.1	-45.4	-41.25	4.17
	HE20, M0 to M9 3ss	3	13	-66.3	-61.6	-63.1		0.1	-45.4	-41.25	4.17
	HE20, M0 to M9 1ss	4	13	-67.5	-62.2	-63.7	-66.0	0.1	-45.3	-41.25	4.04
	HE20, M0 to M9 2ss	4	13	-67.5	-62.2	-63.7	-66.0	0.1	-45.3	-41.25	4.04
	HE20, M0 to M9 3ss	4	13	-67.5	-62.2	-63.7	-66.0	0.1	-45.3	-41.25	4.04
	HE20, M0 to M9 4ss	4	13	-67.5	-62.2	-63.7	-66.0	0.1	-45.3	-41.25	4.04
	HE20 Beam Forming, M0 to M9 1ss	2	13	-66.0	-60.7			0.1	-46.5	-41.25	5.26
	HE20 Beam Forming, M0 to M9 2ss	2	13	-65.0	-59.7			0.1	-45.5	-41.25	4.26
	HE20 Beam Forming, M0 to M9 1ss	3	15	-68.8	-63.3	-64.7		0.1	-45.2	-41.25	3.96
	HE20 Beam Forming, M0 to M9 2ss	3	13	-66.3	-61.6	-63.1		0.1	-45.4	-41.25	4.17
	HE20 Beam Forming, M0 to M9 3ss	3	13	-66.3	-61.6	-63.1		0.1	-45.4	-41.25	4.17
	HE20 Beam Forming, M0 to M9 1ss	4	16	-69.8	-65.9	-67.5	-70.0	0.1	-45.9	-41.25	4.62
	HE20 Beam Forming, M0 to M9 2ss	4	13	-68.3	-62.6	-64.1	-66.6	0.1	-45.8	-41.25	4.52
	HE20 Beam Forming, M0 to M9 3ss	4	13	-67.5	-62.2	-63.7	-66.0	0.1	-45.3	-41.25	4.04
	HE20 Beam Forming, M0 to M9 4ss	4	13	-67.5	-62.2	-63.7	-66.0	0.1	-45.3	-41.25	4.04
	HE20 STBC, M0 to M9 2ss	2	13	-65.0	-59.7			0.1	-45.5	-41.25	4.26
	HE20 STBC, M0 to M9 2ss	3	13	-66.3	-61.6	-63.1		0.1	-45.4	-41.25	4.17
	HE20 STBC, M0 to M9 2ss	4	13	-68.3	-62.6	-64.1	-66.6	0.1	-45.8	-41.25	4.52
5270	Non HT40, 6 to 54 Mbps	1	13	-65.2				0.0	-52.2	-41.25	10.91
	Non HT40, 6 to 54 Mbps	2	13	-65.2	-58.6			0.0	-44.7	-41.25	3.45
	Non HT40, 6 to 54 Mbps	3	13	-65.2	-59.7	-60.7		0.0	-43.5	-41.25	2.23
	Non HT40, 6 to 54 Mbps	4	13	-65.8	-61.5	-62.4	-63.9	0.0	-44.0	-41.25	2.80
	HT/VHT40, M0 to M7	1	13	-65.6				0.1	-52.5	-41.25	11.25
	HT/VHT40, M0 to M7	2	13	-65.6	-58.7			0.1	-44.8	-41.25	3.54
	HT/VHT40, M8 to M15	2	13	-65.6	-58.7			0.1	-44.8	-41.25	3.54
	HT/VHT40, M0 to M7	3	13	-65.6	-60.3	-60.7		0.1	-43.8	-41.25	2.51
	HT/VHT40, M8 to M15	3	13	-65.6	-60.3	-60.7		0.1	-43.8	-41.25	2.51
	HT/VHT40, M16 to M23	3	13	-65.6	-60.3	-60.7		0.1	-43.8	-41.25	2.51
	HT/VHT40, M0 to M7	4	13	-65.9	-61.7	-62.5	-64.2	0.1	-44.2	-41.25	2.92
	HT/VHT40, M8 to M15	4	13	-65.9	-61.7	-62.5	-64.2	0.1	-44.2	-41.25	2.92
	HT/VHT40, M16 to M23	4	13	-65.9	-61.7	-62.5	-64.2	0.1	-44.2	-41.25	2.92
	HT/VHT40, M24 to M31	4	13	-65.9	-61.7	-62.5	-64.2	0.1	-44.2	-41.25	2.92
	HT/VHT40 Beam Forming, M0 to M7	2	13	-65.9	-61.7			0.1	-47.2	-41.25	5.95
	HT/VHT40 Beam Forming, M8 to M15	2	13	-65.6	-58.7			0.1	-44.8	-41.25	3.54
	HT/VHT40 Beam Forming, M0 to M7	3	15	-69.3	-63.7	-64.9		0.1	-45.5	-41.25	4.26
	HT/VHT40 Beam Forming, M8 to M15	3	13	-66.8	-61.9	-63.4		0.1	-45.7	-41.25	4.47
	HT/VHT40 Beam Forming, M16 to M23	3	13	-65.6	-60.3	-60.7		0.1	-43.8	-41.25	2.51
	HT/VHT40 Beam Forming, M0 to M7	4	16	-70.3	-66.4	-67.9	-68.3	0.1	-45.9	-41.25	4.64



	HT/VHT40 Beam Forming, M8 to M15	4	13	-68.4	-63.3	-64.4	-66.8	0.1	-46.2	-41.25	4.91
	HT/VHT40 Beam Forming, M16 to M23	4	13	-66.8	-61.9	-63.4	-65.6	0.1	-44.9	-41.25	3.64
	HT/VHT40 Beam Forming, M24 to M31	4	13	-65.9	-61.7	-62.5	-64.2	0.1	-44.2	-41.25	2.92
	HT/VHT40 STBC, M0 to M7	2	13	-65.6	-58.7			0.1	-44.8	-41.25	3.54
	HT/VHT40 STBC, M0 to M7	3	13	-66.8	-61.9	-63.4		0.1	-45.7	-41.25	4.47
	HT/VHT40 STBC, M0 to M7	4	13	-68.4	-63.3	-64.4	-66.8	0.1	-46.2	-41.25	4.91
	HE40, M0 to M9 1ss	1	13	-65.7				0.1	-52.6	-41.25	11.32
	HE40, M0 to M9 1ss	2	13	-65.7	-59.1			0.1	-45.1	-41.25	3.86
	HE40, M0 to M9 2ss	2	13	-65.7	-59.1			0.1	-45.1	-41.25	3.86
	HE40, M0 to M9 1ss	3	13	-65.7	-60.5	-61.0		0.1	-44.0	-41.25	2.71
	HE40, M0 to M9 2ss	3	13	-65.7	-60.5	-61.0		0.1	-44.0	-41.25	2.71
	HE40, M0 to M9 3ss	3	13	-65.7	-60.5	-61.0		0.1	-44.0	-41.25	2.71
	HE40, M0 to M9 1ss	4	13	-66.0	-61.8	-62.6	-64.3	0.1	-44.2	-41.25	2.99
	HE40, M0 to M9 2ss	4	13	-66.0	-61.8	-62.6	-64.3	0.1	-44.2	-41.25	2.99
	HE40, M0 to M9 3ss	4	13	-66.0	-61.8	-62.6	-64.3	0.1	-44.2	-41.25	2.99
	HE40, M0 to M9 4ss	4	13	-66.0	-61.8	-62.6	-64.3	0.1	-44.2	-41.25	2.99
	HE40 Beam Forming, M0 to M9 1ss	2	13	-66.0	-61.8			0.1	-47.3	-41.25	6.02
	HE40 Beam Forming, M0 to M9 2ss	2	13	-65.7	-59.1			0.1	-45.1	-41.25	3.86
	HE40 Beam Forming, M0 to M9 1ss	3	15	-69.3	-63.8	-64.7		0.1	-45.5	-41.25	4.21
	HE40 Beam Forming, M0 to M9 2ss	3	13	-66.6	-62.0	-63.3		0.1	-45.7	-41.25	4.42
	HE40 Beam Forming, M0 to M9 3ss	3	13	-65.7	-60.5	-61.0		0.1	-44.0	-41.25	2.71
	HE40 Beam Forming, M0 to M9 1ss	4	16	-70.5	-66.5	-67.7	-68.3	0.1	-45.9	-41.25	4.62
	HE40 Beam Forming, M0 to M9 2ss	4	13	-68.6	-63.3	-64.6	-67.0	0.1	-46.3	-41.25	5.01
	HE40 Beam Forming, M0 to M9 3ss	4	13	-66.6	-62.0	-63.3	-65.8	0.1	-44.9	-41.25	3.63
	HE40 Beam Forming, M0 to M9 4ss	4	13	-66.0	-61.8	-62.6	-64.3	0.1	-44.2	-41.25	2.99
	HE40 STBC, M0 to M9 2ss	2	13	-65.7	-59.1			0.1	-45.1	-41.25	3.86
	HE40 STBC, M0 to M9 2ss	3	13	-66.6	-62.0	-63.3		0.1	-45.7	-41.25	4.42
	HE40 STBC, M0 to M9 2ss	4	13	-68.6	-63.3	-64.6	-67.0	0.1	-46.3	-41.25	5.01
5290	Non HT80, 6 to 54 Mbps	1	13	-67.5				0.1	-54.4	-41.25	13.20
	Non HT80, 6 to 54 Mbps	2	13	-67.5	-63.0			0.1	-48.6	-41.25	7.38
	Non HT80, 6 to 54 Mbps	3	13	-68.7	-63.4	-64.6		0.1	-47.2	-41.25	5.97
	Non HT80, 6 to 54 Mbps	4	13	-69.5	-63.9	-64.9	-67.5	0.1	-46.9	-41.25	5.61
	VHT80, M0 to M9 1ss	1	13	-67.2				0.2	-54.0	-41.25	12.73
	VHT80, M0 to M9 1ss	2	13	-68.4	-63.2			0.2	-48.8	-41.25	7.59
	VHT80, M0 to M9 2ss	2	13	-68.4	-63.2			0.2	-48.8	-41.25	7.59
	VHT80, M0 to M9 1ss	3	13	-68.4	-63.2	-64.4		0.2	-46.8	-41.25	5.59
	VHT80, M0 to M9 2ss	3	13	-68.4	-63.2	-64.4		0.2	-46.8	-41.25	5.59
	VHT80, M0 to M9 3ss	3	13	-68.4	-63.2	-64.4		0.2	-46.8	-41.25	5.59
	VHT80, M0 to M9 1ss	4	13	-69.1	-63.7	-64.9	-67.5	0.2	-46.6	-41.25	5.32
	VHT80, M0 to M9 2ss	4	13	-69.1	-63.7	-64.9	-67.5	0.2	-46.6	-41.25	5.32
	VHT80, M0 to M9 3ss	4	13	-69.1	-63.7	-64.9	-67.5	0.2	-46.6	-41.25	5.32



VHT80, M0 to M9 4ss	4	13	-69.1	-63.7	-64.9	-67.5	0.2	-46.6	-41.25	5.32
VHT80 Beam Forming, M0 to M9 1ss	2	13	-68.4	-63.2			0.2	-48.8	-41.25	7.59
VHT80 Beam Forming, M0 to M9 2ss	2	13	-68.4	-63.2			0.2	-48.8	-41.25	7.59
VHT80 Beam Forming, M0 to M9 1ss	3	15	-69.9	-66.1	-66.3		0.2	-47.1	-41.25	5.88
VHT80 Beam Forming, M0 to M9 2ss	3	13	-68.4	-63.2	-64.4		0.2	-46.8	-41.25	5.59
VHT80 Beam Forming, M0 to M9 3ss	3	13	-68.4	-63.2	-64.4		0.2	-46.8	-41.25	5.59
VHT80 Beam Forming, M0 to M9 1ss	4	16	-70.4	-66.6	-68.0	-69.3	0.2	-46.1	-41.25	4.86
VHT80 Beam Forming, M0 to M9 2ss	4	13	-69.1	-63.7	-64.9	-67.5	0.2	-46.6	-41.25	5.32
VHT80 Beam Forming, M0 to M9 3ss	4	13	-69.1	-63.7	-64.9	-67.5	0.2	-46.6	-41.25	5.32
VHT80 Beam Forming, M0 to M9 4ss	4	13	-69.1	-63.7	-64.9	-67.5	0.2	-46.6	-41.25	5.32
VHT80 STBC, M0 to M9 1ss	2	13	-68.4	-63.2			0.2	-48.8	-41.25	7.59
VHT80 STBC, M0 to M9 1ss	3	13	-68.4	-63.2	-64.4		0.2	-46.8	-41.25	5.59
VHT80 STBC, M0 to M9 1ss	4	13	-69.1	-63.7	-64.9	-67.5	0.2	-46.6	-41.25	5.32
HE80, M0 to M9 1ss	1	13	-68.5				0.3	-55.2	-41.25	13.99
HE80, M0 to M9 1ss	2	13	-68.5	-63.6			0.3	-49.1	-41.25	7.87
HE80, M0 to M9 2ss	2	13	-68.5	-63.6			0.3	-49.1	-41.25	7.87
HE80, M0 to M9 1ss	3	13	-69.3	-64.0	-64.9		0.3	-47.5	-41.25	6.25
HE80, M0 to M9 2ss	3	13	-69.3	-64.0	-64.9		0.3	-47.5	-41.25	6.25
HE80, M0 to M9 3ss	3	13	-69.3	-64.0	-64.9		0.3	-47.5	-41.25	6.25
HE80, M0 to M9 1ss	4	13	-69.3	-64.0	-64.9	-67.8	0.3	-46.7	-41.25	5.47
HE80, M0 to M9 2ss	4	13	-69.3	-64.0	-64.9	-67.8	0.3	-46.7	-41.25	5.47
HE80, M0 to M9 3ss	4	13	-69.3	-64.0	-64.9	-67.8	0.3	-46.7	-41.25	5.47
HE80, M0 to M9 4ss	4	13	-69.3	-64.0	-64.9	-67.8	0.3	-46.7	-41.25	5.47
HE80 Beam Forming, M0 to M9 1ss	2	13	-68.5	-63.6			0.3	-49.1	-41.25	7.87
HE80 Beam Forming, M0 to M9 2ss	2	13	-68.5	-63.6			0.3	-49.1	-41.25	7.87
HE80 Beam Forming, M0 to M9 1ss	3	15	-69.9	-66.1	-65.5		0.3	-46.7	-41.25	5.50
HE80 Beam Forming, M0 to M9 2ss	3	13	-69.3	-64.0	-64.9		0.3	-47.5	-41.25	6.25
HE80 Beam Forming, M0 to M9 3ss	3	13	-69.3	-64.0	-64.9		0.3	-47.5	-41.25	6.25
HE80 Beam Forming, M0 to M9 1ss	4	16	-70.6	-66.7	-67.9	-69.4	0.3	-46.1	-41.25	4.87
HE80 Beam Forming, M0 to M9 2ss	4	13	-69.3	-64.0	-64.9	-67.8	0.3	-46.7	-41.25	5.47
HE80 Beam Forming, M0 to M9 3ss	4	13	-69.3	-64.0	-64.9	-67.8	0.3	-46.7	-41.25	5.47
HE80 Beam Forming, M0 to M9 4ss	4	13	-69.3	-64.0	-64.9	-67.8	0.3	-46.7	-41.25	5.47
HE80 STBC, M0 to M9 1ss	2	13	-68.5	-63.6			0.3	-49.1	-41.25	7.87
HE80 STBC, M0 to M9 1ss	3	13	-69.3	-64.0	-64.9		0.3	-47.5	-41.25	6.25
HE80 STBC, M0 to M9 1ss	4	13	-69.3	-64.0	-64.9	-67.8	0.3	-46.7	-41.25	5.47

53	Non HT20, 6 to 54 Mbps	1	13	-65.1				0.0	-52.1	-41.25	10.81
00	Non HT20, 6 to 54 Mbps	2	13	-65.1	-60.0			0.0	-45.8	-41.25	4.54



Non HT20, 6 to 54 Mbps	3	13	-66.2	-61.9	-63.3		0.0	-45.6	-41.25	4.39
Non HT20, 6 to 54 Mbps	4	13	-66.8	-62.4	-64.1	-66.8	0.0	-45.6	-41.25	4.30
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-65.7	-61.3			0.0	-46.9	-41.25	5.66
Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-68.7	-63.5	-65.1		0.0	-45.5	-41.25	4.21
Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-70.1	-66.3	-67.8	-70.3	0.0	-46.2	-41.25	4.99
HT/VHT20, M0 to M7	1	13	-65.0				0.1	-51.9	-41.25	10.70
HT/VHT20, M0 to M7	2	13	-65.0	-59.1			0.1	-45.1	-41.25	3.80
HT/VHT20, M8 to M15	2	13	-65.0	-59.1			0.1	-45.1	-41.25	3.80
HT/VHT20, M0 to M7	3	13	-66.3	-61.8	-63.4		0.1	-45.6	-41.25	4.39
HT/VHT20, M8 to M15	3	13	-66.3	-61.8	-63.4		0.1	-45.6	-41.25	4.39
HT/VHT20, M16 to M23	3	13	-66.3	-61.8	-63.4		0.1	-45.6	-41.25	4.39
HT/VHT20, M0 to M7	4	13	-66.9	-62.3	-64.2	-66.7	0.1	-45.5	-41.25	4.28
HT/VHT20, M8 to M15	4	13	-66.9	-62.3	-64.2	-66.7	0.1	-45.5	-41.25	4.28
HT/VHT20, M16 to M23	4	13	-66.9	-62.3	-64.2	-66.7	0.1	-45.5	-41.25	4.28
HT/VHT20, M24 to M31	4	13	-66.9	-62.3	-64.2	-66.7	0.1	-45.5	-41.25	4.28
HT/VHT20 Beam Forming, M0 to M7	2	13	-65.7	-61.2			0.1	-46.8	-41.25	5.58
HT/VHT20 Beam Forming, M8 to M15	2	13	-65.0	-59.1			0.1	-45.1	-41.25	3.80
HT/VHT20 Beam Forming, M0 to M7	3	15	-68.9	-63.5	-64.9		0.1	-45.4	-41.25	4.16
HT/VHT20 Beam Forming, M8 to M15	3	13	-66.3	-61.8	-63.4		0.1	-45.6	-41.25	4.39
HT/VHT20 Beam Forming, M16 to M23	3	13	-66.3	-61.8	-63.4		0.1	-45.6	-41.25	4.39
HT/VHT20 Beam Forming, M0 to M7	4	16	-69.9	-66.0	-67.6	-70.1	0.1	-46.0	-41.25	4.74
HT/VHT20 Beam Forming, M8 to M15	4	13	-68.4	-63.0	-64.6	-67.0	0.1	-46.2	-41.25	4.93
HT/VHT20 Beam Forming, M16 to M23	4	13	-66.9	-62.3	-64.2	-66.7	0.1	-45.5	-41.25	4.28
HT/VHT20 Beam Forming, M24 to M31	4	13	-66.9	-62.3	-64.2	-66.7	0.1	-45.5	-41.25	4.28
HT/VHT20 STBC, M0 to M7	2	13	-65.0	-59.1			0.1	-45.1	-41.25	3.80
HT/VHT20 STBC, M0 to M7	3	13	-66.3	-61.8	-63.4		0.1	-45.6	-41.25	4.39
HT/VHT20 STBC, M0 to M7	4	13	-68.4	-63.0	-64.6	-67.0	0.1	-46.2	-41.25	4.93
HE20, M0 to M9 1ss	1	13	-65.2				0.1	-52.1	-41.25	10.88
HE20, M0 to M9 1ss	2	13	-65.2	-59.0			0.1	-45.0	-41.25	3.75
HE20, M0 to M9 2ss	2	13	-65.2	-59.0			0.1	-45.0	-41.25	3.75
HE20, M0 to M9 1ss	3	13	-66.4	-61.8	-63.6		0.1	-45.7	-41.25	4.45
HE20, M0 to M9 2ss	3	13	-66.4	-61.8	-63.6		0.1	-45.7	-41.25	4.45
HE20, M0 to M9 3ss	3	13	-66.4	-61.8	-63.6		0.1	-45.7	-41.25	4.45
HE20, M0 to M9 1ss	4	13	-66.9	-62.5	-64.1	-66.8	0.1	-45.6	-41.25	4.33
HE20, M0 to M9 2ss	4	13	-66.9	-62.5	-64.1	-66.8	0.1	-45.6	-41.25	4.33
HE20, M0 to M9 3ss	4	13	-66.9	-62.5	-64.1	-66.8	0.1	-45.6	-41.25	4.33
HE20, M0 to M9 4ss	4	13	-66.9	-62.5	-64.1	-66.8	0.1	-45.6	-41.25	4.33
HE20 Beam Forming, M0 to M9 1ss	2	13	-65.8	-61.2			0.1	-46.8	-41.25	5.59
HE20 Beam Forming, M0 to M9 2ss	2	13	-65.2	-59.0			0.1	-45.0	-41.25	3.75
HE20 Beam Forming, M0 to M9 1ss	3	15	-69.1	-63.6	-65.0		0.1	-45.5	-41.25	4.26
HE20 Beam Forming, M0 to M9 2ss	3	13	-66.4	-61.8	-63.6		0.1	-45.7	-41.25	4.45
HE20 Beam Forming, M0 to M9 3ss	3	13	-66.4	-61.8	-63.6		0.1	-45.7	-41.25	4.45



	HE20 Beam Forming, M0 to M9 1ss	4	16	-70.3	-66.3	-67.8	-70.5	0.1	-46.3	-41.25	5.02
	HE20 Beam Forming, M0 to M9 2ss	4	13	-68.4	-63.1	-64.5	-67.3	0.1	-46.2	-41.25	4.98
	HE20 Beam Forming, M0 to M9 3ss	4	13	-66.9	-62.5	-64.1	-66.8	0.1	-45.6	-41.25	4.33
	HE20 Beam Forming, M0 to M9 4ss	4	13	-66.9	-62.5	-64.1	-66.8	0.1	-45.6	-41.25	4.33
	HE20 STBC, M0 to M9 2ss	2	13	-65.2	-59.0			0.1	-45.0	-41.25	3.75
	HE20 STBC, M0 to M9 2ss	3	13	-66.4	-61.8	-63.6		0.1	-45.7	-41.25	4.45
	HE20 STBC, M0 to M9 2ss	4	13	-68.4	-63.1	-64.5	-67.3	0.1	-46.2	-41.25	4.98
5310	Non HT40, 6 to 54 Mbps	1	13	-66.3				0.0	-53.3	-41.25	12.01
	Non HT40, 6 to 54 Mbps	2	13	-66.3	-62.5			0.0	-47.9	-41.25	6.69
	Non HT40, 6 to 54 Mbps	3	13	-66.9	-63.1	-64.1		0.0	-46.6	-41.25	5.36
	Non HT40, 6 to 54 Mbps	4	13	-66.9	-63.1	-64.1	-67.1	0.0	-45.9	-41.25	4.64
	HT/VHT40, M0 to M7	1	13	-67.1				0.1	-54.0	-41.25	12.75
	HT/VHT40, M0 to M7	2	13	-67.1	-63.0			0.1	-48.5	-41.25	7.22
	HT/VHT40, M8 to M15	2	13	-67.1	-63.0			0.1	-48.5	-41.25	7.22
	HT/VHT40, M0 to M7	3	13	-68.0	-63.5	-64.7		0.1	-47.1	-41.25	5.90
	HT/VHT40, M8 to M15	3	13	-68.0	-63.5	-64.7		0.1	-47.1	-41.25	5.90
	HT/VHT40, M16 to M23	3	13	-68.0	-63.5	-64.7		0.1	-47.1	-41.25	5.90
	HT/VHT40, M0 to M7	4	13	-68.0	-63.5	-64.7	-67.4	0.1	-46.4	-41.25	5.13
	HT/VHT40, M8 to M15	4	13	-68.0	-63.5	-64.7	-67.4	0.1	-46.4	-41.25	5.13
	HT/VHT40, M16 to M23	4	13	-68.0	-63.5	-64.7	-67.4	0.1	-46.4	-41.25	5.13
	HT/VHT40, M24 to M31	4	13	-68.0	-63.5	-64.7	-67.4	0.1	-46.4	-41.25	5.13
	HT/VHT40 Beam Forming, M0 to M7	2	13	-67.1	-63.0			0.1	-48.5	-41.25	7.22
	HT/VHT40 Beam Forming, M8 to M15	2	13	-67.1	-63.0			0.1	-48.5	-41.25	7.22
	HT/VHT40 Beam Forming, M0 to M7	3	15	-69.2	-63.7	-64.8		0.1	-45.5	-41.25	4.21
	HT/VHT40 Beam Forming, M8 to M15	3	13	-68.0	-63.5	-64.7		0.1	-47.1	-41.25	5.90
	HT/VHT40 Beam Forming, M16 to M23	3	13	-68.0	-63.5	-64.7		0.1	-47.1	-41.25	5.90
	HT/VHT40 Beam Forming, M0 to M7	4	16	-70.3	-66.2	-67.8	-69.2	0.1	-46.0	-41.25	4.73
	HT/VHT40 Beam Forming, M8 to M15	4	13	-68.0	-63.5	-64.7	-67.4	0.1	-46.4	-41.25	5.13
	HT/VHT40 Beam Forming, M16 to M23	4	13	-68.0	-63.5	-64.7	-67.4	0.1	-46.4	-41.25	5.13
	HT/VHT40 Beam Forming, M24 to M31	4	13	-68.0	-63.5	-64.7	-67.4	0.1	-46.4	-41.25	5.13
	HT/VHT40 STBC, M0 to M7	2	13	-67.1	-63.0			0.1	-48.5	-41.25	7.22
	HT/VHT40 STBC, M0 to M7	3	13	-68.0	-63.5	-64.7		0.1	-47.1	-41.25	5.90
	HT/VHT40 STBC, M0 to M7	4	13	-68.0	-63.5	-64.7	-67.4	0.1	-46.4	-41.25	5.13
	HE40, M0 to M9 1ss	1	13	-67.0				0.1	-53.9	-41.25	12.62
	HE40, M0 to M9 1ss	2	13	-67.9	-63.2			0.1	-48.8	-41.25	7.55
	HE40, M0 to M9 2ss	2	13	-67.9	-63.2			0.1	-48.8	-41.25	7.55
	HE40, M0 to M9 1ss	3	13	-67.9	-63.2	-64.4		0.1	-46.9	-41.25	5.60
	HE40, M0 to M9 2ss	3	13	-67.9	-63.2	-64.4		0.1	-46.9	-41.25	5.60
	HE40, M0 to M9 3ss	3	13	-67.9	-63.2	-64.4		0.1	-46.9	-41.25	5.60
	HE40, M0 to M9 1ss	4	13	-69.0	-63.6	-64.6	-67.7	0.1	-46.5	-41.25	5.29
	HE40, M0 to M9 2ss	4	13	-69.0	-63.6	-64.6	-67.7	0.1	-46.5	-41.25	5.29



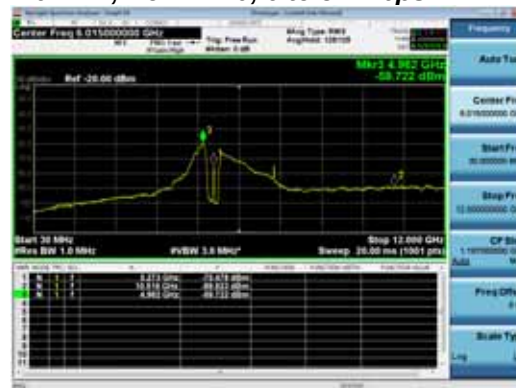
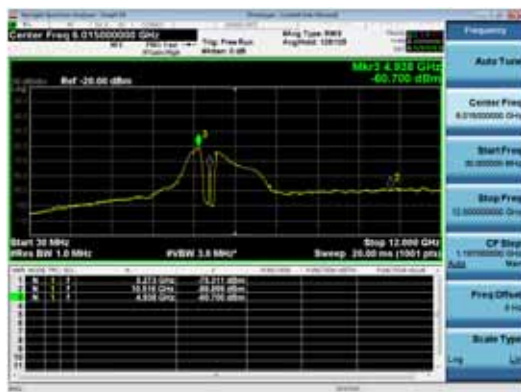
	HE40, M0 to M9 3ss	4	13	-69.0	-63.6	-64.6	-67.7	0.1	-46.5	-41.25	5.29
	HE40, M0 to M9 4ss	4	13	-69.0	-63.6	-64.6	-67.7	0.1	-46.5	-41.25	5.29
	HE40 Beam Forming, M0 to M9 1ss	2	13	-67.9	-63.2			0.1	-48.8	-41.25	7.55
	HE40 Beam Forming, M0 to M9 2ss	2	13	-67.9	-63.2			0.1	-48.8	-41.25	7.55
	HE40 Beam Forming, M0 to M9 1ss	3	15	-69.0	-63.6	-64.6		0.1	-45.3	-41.25	4.03
	HE40 Beam Forming, M0 to M9 2ss	3	13	-67.9	-63.2	-64.4		0.1	-46.9	-41.25	5.60
	HE40 Beam Forming, M0 to M9 3ss	3	13	-67.9	-63.2	-64.4		0.1	-46.9	-41.25	5.60
	HE40 Beam Forming, M0 to M9 1ss	4	16	-70.3	-66.5	-67.8	-69.6	0.1	-46.1	-41.25	4.89
	HE40 Beam Forming, M0 to M9 2ss	4	13	-69.0	-63.6	-64.6	-67.7	0.1	-46.5	-41.25	5.29
	HE40 Beam Forming, M0 to M9 3ss	4	13	-69.0	-63.6	-64.6	-67.7	0.1	-46.5	-41.25	5.29
	HE40 Beam Forming, M0 to M9 4ss	4	13	-69.0	-63.6	-64.6	-67.7	0.1	-46.5	-41.25	5.29
	HE40 STBC, M0 to M9 2ss	2	13	-67.9	-63.2			0.1	-48.8	-41.25	7.55
	HE40 STBC, M0 to M9 2ss	3	13	-67.9	-63.2	-64.4		0.1	-46.9	-41.25	5.60
	HE40 STBC, M0 to M9 2ss	4	13	-69.0	-63.6	-64.6	-67.7	0.1	-46.5	-41.25	5.29
5320	Non HT20, 6 to 54 Mbps	1	13	-65.6				0.0	-52.6	-41.25	11.31
	Non HT20, 6 to 54 Mbps	2	13	-65.6	-59.7			0.0	-45.7	-41.25	4.41
	Non HT20, 6 to 54 Mbps	3	13	-66.7	-62.5	-64.2		0.0	-46.3	-41.25	5.08
	Non HT20, 6 to 54 Mbps	4	13	-67.3	-63.1	-64.6	-67.3	0.0	-46.1	-41.25	4.88
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-66.4	-61.6			0.0	-47.3	-41.25	6.06
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-69.2	-63.9	-65.5		0.0	-45.9	-41.25	4.62
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-70.7	-66.7	-68.3	-71.2	0.0	-46.8	-41.25	5.52
	HT/VHT20, M0 to M7	1	13	-65.9				0.1	-52.8	-41.25	11.60
	HT/VHT20, M0 to M7	2	13	-65.9	-60.2			0.1	-46.1	-41.25	4.86
	HT/VHT20, M8 to M15	2	13	-65.9	-60.2			0.1	-46.1	-41.25	4.86
	HT/VHT20, M0 to M7	3	13	-66.6	-62.1	-63.5		0.1	-45.9	-41.25	4.62
	HT/VHT20, M8 to M15	3	13	-66.6	-62.1	-63.5		0.1	-45.9	-41.25	4.62
	HT/VHT20, M16 to M23	3	13	-66.6	-62.1	-63.5		0.1	-45.9	-41.25	4.62
	HT/VHT20, M0 to M7	4	13	-67.1	-63.0	-64.2	-67.2	0.1	-45.9	-41.25	4.67
	HT/VHT20, M8 to M15	4	13	-67.1	-63.0	-64.2	-67.2	0.1	-45.9	-41.25	4.67
	HT/VHT20, M16 to M23	4	13	-67.1	-63.0	-64.2	-67.2	0.1	-45.9	-41.25	4.67
	HT/VHT20, M24 to M31	4	13	-67.1	-63.0	-64.2	-67.2	0.1	-45.9	-41.25	4.67
	HT/VHT20 Beam Forming, M0 to M7	2	13	-66.6	-62.1			0.1	-47.7	-41.25	6.48
	HT/VHT20 Beam Forming, M8 to M15	2	13	-65.9	-60.2			0.1	-46.1	-41.25	4.86
	HT/VHT20 Beam Forming, M0 to M7	3	15	-69.5	-64.4	-65.7		0.1	-46.2	-41.25	4.98
	HT/VHT20 Beam Forming, M8 to M15	3	13	-67.1	-63.0	-64.2		0.1	-46.6	-41.25	5.38
	HT/VHT20 Beam Forming, M16 to M23	3	13	-66.6	-62.1	-63.5		0.1	-45.9	-41.25	4.62
	HT/VHT20 Beam Forming, M0 to M7	4	16	-70.4	-66.6	-68.2	-70.9	0.1	-46.6	-41.25	5.35
	HT/VHT20 Beam Forming, M8 to M15	4	13	-69.1	-63.8	-65.1	-68.1	0.1	-46.9	-41.25	5.68
	HT/VHT20 Beam Forming, M16 to M23	4	13	-67.1	-63.0	-64.2	-67.2	0.1	-45.9	-41.25	4.67
	HT/VHT20 Beam Forming, M24 to M31	4	13	-67.1	-63.0	-64.2	-67.2	0.1	-45.9	-41.25	4.67
	HT/VHT20 STBC, M0 to M7	2	13	-65.9	-60.2			0.1	-46.1	-41.25	4.86



	HT/VHT20 STBC, M0 to M7	3	13	-67.1	-63.0	-64.2		0.1	-46.6	-41.25	5.38
	HT/VHT20 STBC, M0 to M7	4	13	-69.1	-63.8	-65.1	-68.1	0.1	-46.9	-41.25	5.68
	HE20, M0 to M9 1ss	1	13	-65.4				0.1	-52.3	-41.25	11.08
	HE20, M0 to M9 1ss	2	13	-65.4	-59.8			0.1	-45.7	-41.25	4.42
	HE20, M0 to M9 2ss	2	13	-65.4	-59.8			0.1	-45.7	-41.25	4.42
	HE20, M0 to M9 1ss	3	13	-65.9	-61.7	-63.2		0.1	-45.4	-41.25	4.18
	HE20, M0 to M9 2ss	3	13	-65.9	-61.7	-63.2		0.1	-45.4	-41.25	4.18
	HE20, M0 to M9 3ss	3	13	-65.9	-61.7	-63.2		0.1	-45.4	-41.25	4.18
	HE20, M0 to M9 1ss	4	13	-66.4	-62.6	-63.6	-66.7	0.1	-45.4	-41.25	4.13
	HE20, M0 to M9 2ss	4	13	-66.4	-62.6	-63.6	-66.7	0.1	-45.4	-41.25	4.13
	HE20, M0 to M9 3ss	4	13	-66.4	-62.6	-63.6	-66.7	0.1	-45.4	-41.25	4.13
	HE20, M0 to M9 4ss	4	13	-66.4	-62.6	-63.6	-66.7	0.1	-45.4	-41.25	4.13
	HE20 Beam Forming, M0 to M9 1ss	2	13	-65.9	-61.7			0.1	-47.2	-41.25	5.98
	HE20 Beam Forming, M0 to M9 2ss	2	13	-65.4	-59.8			0.1	-45.7	-41.25	4.42
	HE20 Beam Forming, M0 to M9 1ss	3	15	-69.2	-63.9	-65.3		0.1	-45.8	-41.25	4.53
	HE20 Beam Forming, M0 to M9 2ss	3	13	-66.4	-62.6	-63.6		0.1	-46.1	-41.25	4.83
	HE20 Beam Forming, M0 to M9 3ss	3	13	-65.9	-61.7	-63.2		0.1	-45.4	-41.25	4.18
	HE20 Beam Forming, M0 to M9 1ss	4	16	-70.3	-66.5	-68.0	-71.0	0.1	-46.5	-41.25	5.24
	HE20 Beam Forming, M0 to M9 2ss	4	13	-68.7	-63.4	-64.8	-67.7	0.1	-46.5	-41.25	5.29
	HE20 Beam Forming, M0 to M9 3ss	4	13	-66.4	-62.6	-63.6	-66.7	0.1	-45.4	-41.25	4.13
	HE20 Beam Forming, M0 to M9 4ss	4	13	-66.4	-62.6	-63.6	-66.7	0.1	-45.4	-41.25	4.13
	HE20 STBC, M0 to M9 2ss	2	13	-65.4	-59.8			0.1	-45.7	-41.25	4.42
	HE20 STBC, M0 to M9 2ss	3	13	-66.4	-62.6	-63.6		0.1	-46.1	-41.25	4.83
	HE20 STBC, M0 to M9 2ss	4	13	-68.7	-63.4	-64.8	-67.7	0.1	-46.5	-41.25	5.29
5250	Non HT160, 6 to 54 Mbps	1	13	-65.4				0.0	-52.4	-41.25	11.10
	Non HT160, 6 to 54 Mbps	2	13	-65.4	-61.9			0.0	-47.2	-41.25	6.00
	Non HT160, 6 to 54 Mbps	3	13	-65.4	-61.9	-63.3		0.0	-45.5	-41.25	4.23
	Non HT160, 6 to 54 Mbps	4	13	-66.4	-62.3	-63.6	-66.0	0.0	-45.2	-41.25	3.92
	VHT160, M0 to M9 1ss	1	13	-66.9				0.4	-53.5	-41.25	12.26
	VHT160, M0 to M9 1ss	2	13	-66.9	-62.7			0.4	-47.9	-41.25	6.66
	VHT160, M0 to M9 2ss	2	13	-66.9	-62.7			0.4	-47.9	-41.25	6.66
	VHT160, M0 to M9 1ss	3	13	-66.9	-62.7	-63.5		0.4	-45.9	-41.25	4.61
	VHT160, M0 to M9 2ss	3	13	-66.9	-62.7	-63.5		0.4	-45.9	-41.25	4.61
	VHT160, M0 to M9 3ss	3	13	-66.9	-62.7	-63.5		0.4	-45.9	-41.25	4.61
	VHT160, M0 to M9 1ss	4	13	-67.3	-63.7	-63.9	-66.6	0.4	-45.7	-41.25	4.43
	VHT160, M0 to M9 2ss	4	13	-67.3	-63.7	-63.9	-66.6	0.4	-45.7	-41.25	4.43
	VHT160, M0 to M9 3ss	4	13	-67.3	-63.7	-63.9	-66.6	0.4	-45.7	-41.25	4.43
	VHT160, M0 to M9 4ss	4	13	-67.3	-63.7	-63.9	-66.6	0.4	-45.7	-41.25	4.43
	VHT160 Beam Forming, M0 to M9 1ss	2	13	-66.9	-62.7			0.4	-47.9	-41.25	6.66
	VHT160 Beam Forming, M0 to M9 2ss	2	13	-66.9	-62.7			0.4	-47.9	-41.25	6.66
	VHT160 Beam Forming, M0 to M9 1ss	3	15	-67.3	-63.7	-63.9		0.4	-44.5	-41.25	3.27



VHT160 Beam Forming, M0 to M9 2ss	3	13	-66.9	-62.7	-63.5		0.4	-45.9	-41.25	4.61
VHT160 Beam Forming, M0 to M9 3ss	3	13	-66.9	-62.7	-63.5		0.4	-45.9	-41.25	4.61
VHT160 Beam Forming, M0 to M9 1ss	4	16	-68.2	-64.9	-66.1	-67.4	0.4	-44.1	-41.25	2.80
VHT160 Beam Forming, M0 to M9 2ss	4	13	-67.3	-63.7	-63.9	-66.6	0.4	-45.7	-41.25	4.43
VHT160 Beam Forming, M0 to M9 3ss	4	13	-67.3	-63.7	-63.9	-66.6	0.4	-45.7	-41.25	4.43
VHT160 Beam Forming, M0 to M9 4ss	4	13	-67.3	-63.7	-63.9	-66.6	0.4	-45.7	-41.25	4.43
VHT160 STBC, M0 to M9 1ss	2	13	-66.9	-62.7			0.4	-47.9	-41.25	6.66
VHT160 STBC, M0 to M9 1ss	3	13	-66.9	-62.7	-63.5		0.4	-45.9	-41.25	4.61
VHT160 STBC, M0 to M9 1ss	4	13	-67.3	-63.7	-63.9	-66.6	0.4	-45.7	-41.25	4.43
HE160, M0 to M9 1ss	1	13	-65.3				0.4	-51.9	-41.25	10.62
HE160, M0 to M9 1ss	2	13	-65.3	-61.8			0.4	-46.8	-41.25	5.51
HE160, M0 to M9 2ss	2	13	-65.3	-61.8			0.4	-46.8	-41.25	5.51
HE160, M0 to M9 1ss	3	13	-66.8	-62.5	-63.2		0.4	-45.6	-41.25	4.35
HE160, M0 to M9 2ss	3	13	-66.8	-62.5	-63.2		0.4	-45.6	-41.25	4.35
HE160, M0 to M9 3ss	3	13	-66.8	-62.5	-63.2		0.4	-45.6	-41.25	4.35
HE160, M0 to M9 1ss	4	13	-66.8	-62.5	-63.2	-66.0	0.4	-44.8	-41.25	3.55
HE160, M0 to M9 2ss	4	13	-66.8	-62.5	-63.2	-66.0	0.4	-44.8	-41.25	3.55
HE160, M0 to M9 3ss	4	13	-66.8	-62.5	-63.2	-66.0	0.4	-44.8	-41.25	3.55
HE160, M0 to M9 4ss	4	13	-66.8	-62.5	-63.2	-66.0	0.4	-44.8	-41.25	3.55
HE160 Beam Forming, M0 to M9 1ss	2	13	-65.3	-61.8			0.4	-46.8	-41.25	5.51
HE160 Beam Forming, M0 to M9 2ss	2	13	-65.3	-61.8			0.4	-46.8	-41.25	5.51
HE160 Beam Forming, M0 to M9 1ss	3	15	-66.8	-62.5	-63.2		0.4	-43.6	-41.25	2.35
HE160 Beam Forming, M0 to M9 2ss	3	13	-66.8	-62.5	-63.2		0.4	-45.6	-41.25	4.35
HE160 Beam Forming, M0 to M9 3ss	3	13	-66.8	-62.5	-63.2		0.4	-45.6	-41.25	4.35
HE160 Beam Forming, M0 to M9 1ss	4	16	-68.3	-64.8	-66.0	-67.5	0.4	-44.0	-41.25	2.73
HE160 Beam Forming, M0 to M9 2ss	4	13	-66.8	-62.5	-63.2	-66.0	0.4	-44.8	-41.25	3.55
HE160 Beam Forming, M0 to M9 3ss	4	13	-66.8	-62.5	-63.2	-66.0	0.4	-44.8	-41.25	3.55
HE160 Beam Forming, M0 to M9 4ss	4	13	-66.8	-62.5	-63.2	-66.0	0.4	-44.8	-41.25	3.55
HE160 STBC, M0 to M9 1ss	2	13	-65.3	-61.8			0.4	-46.8	-41.25	5.51
HE160 STBC, M0 to M9 1ss	3	13	-66.8	-62.5	-63.2		0.4	-45.6	-41.25	4.35
HE160 STBC, M0 to M9 1ss	4	13	-66.8	-62.5	-63.2	-66.0	0.4	-44.8	-41.25	3.55

Conducted Spurs Average, 5270 MHz, Non HT40, 6 to 54 Mbps**Antenna A****Antenna B****Antenna C**



Conducted Spurious Emissions Peak Table

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Tx 5 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5260	Non HT20, 6 to 54 Mbps	1	13	-54.2				0.0	-41.2	-21.25	19.91
	Non HT20, 6 to 54 Mbps	2	13	-54.2	-49.2			0.0	-35.0	-21.25	13.71
	Non HT20, 6 to 54 Mbps	3	13	-56.1	-51.1	-53.2		0.0	-35.2	-21.25	13.94
	Non HT20, 6 to 54 Mbps	4	13	-55.0	-51.4	-53.2	-56.2	0.0	-34.5	-21.25	13.25
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-55.7	-50.2			0.0	-36.1	-21.25	14.83
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-58.1	-52.3	-54.9		0.0	-34.7	-21.25	13.42
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-59.4	-54.1	-56.8	-57.6	0.0	-34.5	-21.25	13.23
	HT/VHT20, M0 to M7	1	13	-54.2				0.1	-41.1	-21.25	19.90
	HT/VHT20, M0 to M7	2	13	-54.2	-48.3			0.1	-34.3	-21.25	13.00
	HT/VHT20, M8 to M15	2	13	-54.2	-48.3			0.1	-34.3	-21.25	13.00
	HT/VHT20, M0 to M7	3	13	-54.1	-51.2	-52.5		0.1	-34.6	-21.25	13.37
	HT/VHT20, M8 to M15	3	13	-54.1	-51.2	-52.5		0.1	-34.6	-21.25	13.37
	HT/VHT20, M16 to M23	3	13	-54.1	-51.2	-52.5		0.1	-34.6	-21.25	13.37
	HT/VHT20, M0 to M7	4	13	-56.7	-51.0	-52.4	-55.0	0.1	-34.2	-21.25	12.91
	HT/VHT20, M8 to M15	4	13	-56.7	-51.0	-52.4	-55.0	0.1	-34.2	-21.25	12.91
	HT/VHT20, M16 to M23	4	13	-56.7	-51.0	-52.4	-55.0	0.1	-34.2	-21.25	12.91
	HT/VHT20, M24 to M31	4	13	-56.7	-51.0	-52.4	-55.0	0.1	-34.2	-21.25	12.91
	HT/VHT20 Beam Forming, M0 to M7	2	13	-54.1	-51.2			0.1	-36.3	-21.25	15.10
	HT/VHT20 Beam Forming, M8 to M15	2	13	-54.2	-48.3			0.1	-34.3	-21.25	13.00
	HT/VHT20 Beam Forming, M0 to M7	3	15	-57.5	-52.7	-54.6		0.1	-34.7	-21.25	13.44
	HT/VHT20 Beam Forming, M8 to M15	3	13	-54.5	-51.5	-53.4		0.1	-35.1	-21.25	13.88
	HT/VHT20 Beam Forming, M16 to M23	3	13	-54.1	-51.2	-52.5		0.1	-34.6	-21.25	13.37
	HT/VHT20 Beam Forming, M0 to M7	4	16	-58.9	-55.2	-57.2	-59.1	0.1	-35.2	-21.25	13.98
	HT/VHT20 Beam Forming, M8 to M15	4	13	-57.7	-53.3	-53.8	-55.9	0.1	-35.8	-21.25	14.52
	HT/VHT20 Beam Forming, M16 to M23	4	13	-56.7	-51.0	-52.4	-55.0	0.1	-34.2	-21.25	12.91
	HT/VHT20 Beam Forming, M24 to M31	4	13	-56.7	-51.0	-52.4	-55.0	0.1	-34.2	-21.25	12.91
	HT/VHT20 STBC, M0 to M7	2	13	-54.2	-48.3			0.1	-34.3	-21.25	13.00
	HT/VHT20 STBC, M0 to M7	3	13	-54.5	-51.5	-53.4		0.1	-35.1	-21.25	13.88
	HT/VHT20 STBC, M0 to M7	4	13	-57.7	-53.3	-53.8	-55.9	0.1	-35.8	-21.25	14.52
	HE20, M0 to M9 1ss	1	13	-54.5				0.1	-41.4	-21.25	20.18



	HE20, M0 to M9 1ss	2	13	-54.5	-48.9			0.1	-34.8	-21.25	13.52
	HE20, M0 to M9 2ss	2	13	-54.5	-48.9			0.1	-34.8	-21.25	13.52
	HE20, M0 to M9 1ss	3	13	-55.3	-50.7	-52.0		0.1	-34.4	-21.25	13.18
	HE20, M0 to M9 2ss	3	13	-55.3	-50.7	-52.0		0.1	-34.4	-21.25	13.18
	HE20, M0 to M9 3ss	3	13	-55.3	-50.7	-52.0		0.1	-34.4	-21.25	13.18
	HE20, M0 to M9 1ss	4	13	-55.8	-50.7	-52.0	-56.0	0.1	-33.9	-21.25	12.68
	HE20, M0 to M9 2ss	4	13	-55.8	-50.7	-52.0	-56.0	0.1	-33.9	-21.25	12.68
	HE20, M0 to M9 3ss	4	13	-55.8	-50.7	-52.0	-56.0	0.1	-33.9	-21.25	12.68
	HE20, M0 to M9 4ss	4	13	-55.8	-50.7	-52.0	-56.0	0.1	-33.9	-21.25	12.68
	HE20 Beam Forming, M0 to M9 1ss	2	13	-54.4	-50.0			0.1	-35.6	-21.25	14.33
	HE20 Beam Forming, M0 to M9 2ss	2	13	-54.5	-48.9			0.1	-34.8	-21.25	13.52
	HE20 Beam Forming, M0 to M9 1ss	3	15	-58.2	-52.5	-54.3		0.1	-34.6	-21.25	13.32
	HE20 Beam Forming, M0 to M9 2ss	3	13	-55.3	-50.7	-52.0		0.1	-34.4	-21.25	13.18
	HE20 Beam Forming, M0 to M9 3ss	3	13	-55.3	-50.7	-52.0		0.1	-34.4	-21.25	13.18
	HE20 Beam Forming, M0 to M9 1ss	4	16	-58.1	-55.4	-56.8	-59.3	0.1	-35.1	-21.25	13.82
	HE20 Beam Forming, M0 to M9 2ss	4	13	-57.7	-52.7	-53.6	-56.3	0.1	-35.5	-21.25	14.29
	HE20 Beam Forming, M0 to M9 3ss	4	13	-55.8	-50.7	-52.0	-56.0	0.1	-33.9	-21.25	12.68
	HE20 Beam Forming, M0 to M9 4ss	4	13	-55.8	-50.7	-52.0	-56.0	0.1	-33.9	-21.25	12.68
	HE20 STBC, M0 to M9 2ss	2	13	-54.5	-48.9			0.1	-34.8	-21.25	13.52
	HE20 STBC, M0 to M9 2ss	3	13	-55.3	-50.7	-52.0		0.1	-34.4	-21.25	13.18
	HE20 STBC, M0 to M9 2ss	4	13	-57.7	-52.7	-53.6	-56.3	0.1	-35.5	-21.25	14.29
5270	Non HT40, 6 to 54 Mbps	1	13	-54.8				0.0	-41.8	-21.25	20.51
	Non HT40, 6 to 54 Mbps	2	13	-54.8	-46.8			0.0	-33.1	-21.25	11.87
	Non HT40, 6 to 54 Mbps	3	13	-54.8	-49.4	-50.5		0.0	-33.2	-21.25	11.96
	Non HT40, 6 to 54 Mbps	4	13	-55.1	-51.0	-51.8	-53.7	0.0	-33.6	-21.25	12.30
	HT/VHT40, M0 to M7	1	13	-54.7				0.1	-41.6	-21.25	20.35
	HT/VHT40, M0 to M7	2	13	-54.7	-47.7			0.1	-33.8	-21.25	12.56
	HT/VHT40, M8 to M15	2	13	-54.7	-47.7			0.1	-33.8	-21.25	12.56
	HT/VHT40, M0 to M7	3	13	-54.7	-49.0	-50.6		0.1	-33.0	-21.25	11.72
	HT/VHT40, M8 to M15	3	13	-54.7	-49.0	-50.6		0.1	-33.0	-21.25	11.72
	HT/VHT40, M16 to M23	3	13	-54.7	-49.0	-50.6		0.1	-33.0	-21.25	11.72
	HT/VHT40, M0 to M7	4	13	-55.4	-50.7	-51.6	-54.1	0.1	-33.4	-21.25	12.18
	HT/VHT40, M8 to M15	4	13	-55.4	-50.7	-51.6	-54.1	0.1	-33.4	-21.25	12.18
	HT/VHT40, M16 to M23	4	13	-55.4	-50.7	-51.6	-54.1	0.1	-33.4	-21.25	12.18
	HT/VHT40, M24 to M31	4	13	-55.4	-50.7	-51.6	-54.1	0.1	-33.4	-21.25	12.18
	HT/VHT40 Beam Forming, M0 to M7	2	13	-55.4	-50.7			0.1	-36.3	-21.25	15.08
	HT/VHT40 Beam Forming, M8 to M15	2	13	-54.7	-47.7			0.1	-33.8	-21.25	12.56
	HT/VHT40 Beam Forming, M0 to M7	3	15	-58.1	-52.5	-54.8		0.1	-34.7	-21.25	13.44
	HT/VHT40 Beam Forming, M8 to M15	3	13	-56.4	-51.5	-50.9		0.1	-34.5	-21.25	13.22
	HT/VHT40 Beam Forming, M16 to M23	3	13	-54.7	-49.0	-50.6		0.1	-33.0	-21.25	11.72
	HT/VHT40 Beam Forming, M0 to M7	4	16	-59.1	-55.5	-57.1	-57.8	0.1	-35.1	-21.25	13.81



	HT/VHT40 Beam Forming, M8 to M15	4	13	-57.2	-52.1	-54.1	-55.7	0.1	-35.2	-21.25	13.99
	HT/VHT40 Beam Forming, M16 to M23	4	13	-56.4	-51.5	-50.9	-54.4	0.1	-33.6	-21.25	12.40
	HT/VHT40 Beam Forming, M24 to M31	4	13	-55.4	-50.7	-51.6	-54.1	0.1	-33.4	-21.25	12.18
	HT/VHT40 STBC, M0 to M7	2	13	-54.7	-47.7			0.1	-33.8	-21.25	12.56
	HT/VHT40 STBC, M0 to M7	3	13	-56.4	-51.5	-50.9		0.1	-34.5	-21.25	13.22
	HT/VHT40 STBC, M0 to M7	4	13	-57.2	-52.1	-54.1	-55.7	0.1	-35.2	-21.25	13.99
	HE40, M0 to M9 1ss	1	13	-54.1				0.1	-41.0	-21.25	19.72
	HE40, M0 to M9 1ss	2	13	-54.1	-47.8			0.1	-33.8	-21.25	12.51
	HE40, M0 to M9 2ss	2	13	-54.1	-47.8			0.1	-33.8	-21.25	12.51
	HE40, M0 to M9 1ss	3	13	-54.1	-50.6	-50.2		0.1	-33.4	-21.25	12.17
	HE40, M0 to M9 2ss	3	13	-54.1	-50.6	-50.2		0.1	-33.4	-21.25	12.17
	HE40, M0 to M9 3ss	3	13	-54.1	-50.6	-50.2		0.1	-33.4	-21.25	12.17
	HE40, M0 to M9 1ss	4	13	-54.9	-51.3	-52.4	-53.5	0.1	-33.7	-21.25	12.42
	HE40, M0 to M9 2ss	4	13	-54.9	-51.3	-52.4	-53.5	0.1	-33.7	-21.25	12.42
	HE40, M0 to M9 3ss	4	13	-54.9	-51.3	-52.4	-53.5	0.1	-33.7	-21.25	12.42
	HE40, M0 to M9 4ss	4	13	-54.9	-51.3	-52.4	-53.5	0.1	-33.7	-21.25	12.42
	HE40 Beam Forming, M0 to M9 1ss	2	13	-54.9	-51.3			0.1	-36.6	-21.25	15.35
	HE40 Beam Forming, M0 to M9 2ss	2	13	-54.1	-47.8			0.1	-33.8	-21.25	12.51
	HE40 Beam Forming, M0 to M9 1ss	3	15	-58.6	-53.0	-54.8		0.1	-35.0	-21.25	13.75
	HE40 Beam Forming, M0 to M9 2ss	3	13	-55.4	-51.8	-52.6		0.1	-35.1	-21.25	13.86
	HE40 Beam Forming, M0 to M9 3ss	3	13	-54.1	-50.6	-50.2		0.1	-33.4	-21.25	12.17
	HE40 Beam Forming, M0 to M9 1ss	4	16	-59.8	-54.6	-57.7	-57.7	0.1	-34.9	-21.25	13.64
	HE40 Beam Forming, M0 to M9 2ss	4	13	-57.7	-53.0	-53.2	-56.1	0.1	-35.4	-21.25	14.17
	HE40 Beam Forming, M0 to M9 3ss	4	13	-55.4	-51.8	-52.6	-54.9	0.1	-34.3	-21.25	13.01
	HE40 Beam Forming, M0 to M9 4ss	4	13	-54.9	-51.3	-52.4	-53.5	0.1	-33.7	-21.25	12.42
	HE40 STBC, M0 to M9 2ss	2	13	-54.1	-47.8			0.1	-33.8	-21.25	12.51
	HE40 STBC, M0 to M9 2ss	3	13	-55.4	-51.8	-52.6		0.1	-35.1	-21.25	13.86
	HE40 STBC, M0 to M9 2ss	4	13	-57.7	-53.0	-53.2	-56.1	0.1	-35.4	-21.25	14.17
5290	Non HT80, 6 to 54 Mbps	1	13	-55.8				0.1	-42.7	-21.25	21.50
	Non HT80, 6 to 54 Mbps	2	13	-55.8	-53.0			0.1	-38.1	-21.25	16.87
	Non HT80, 6 to 54 Mbps	3	13	-57.3	-52.9	-53.9		0.1	-36.5	-21.25	15.26
	Non HT80, 6 to 54 Mbps	4	13	-56.7	-53.3	-54.9	-57.5	0.1	-36.2	-21.25	14.97
	VHT80, M0 to M9 1ss	1	13	-57.0				0.2	-43.8	-21.25	22.53
	VHT80, M0 to M9 1ss	2	13	-57.2	-52.8			0.2	-38.2	-21.25	16.99
	VHT80, M0 to M9 2ss	2	13	-57.2	-52.8			0.2	-38.2	-21.25	16.99
	VHT80, M0 to M9 1ss	3	13	-57.2	-52.8	-54.0		0.2	-36.3	-21.25	15.07
	VHT80, M0 to M9 2ss	3	13	-57.2	-52.8	-54.0		0.2	-36.3	-21.25	15.07
	VHT80, M0 to M9 3ss	3	13	-57.2	-52.8	-54.0		0.2	-36.3	-21.25	15.07
	VHT80, M0 to M9 1ss	4	13	-58.5	-53.7	-54.1	-56.7	0.2	-36.1	-21.25	14.85
	VHT80, M0 to M9 2ss	4	13	-58.5	-53.7	-54.1	-56.7	0.2	-36.1	-21.25	14.85
	VHT80, M0 to M9 3ss	4	13	-58.5	-53.7	-54.1	-56.7	0.2	-36.1	-21.25	14.85



	VHT80, M0 to M9 4ss	4	13	-58.5	-53.7	-54.1	-56.7	0.2	-36.1	-21.25	14.85
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-57.2	-52.8			0.2	-38.2	-21.25	16.99
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-57.2	-52.8			0.2	-38.2	-21.25	16.99
	VHT80 Beam Forming, M0 to M9 1ss	3	15	-58.8	-54.7	-54.9		0.2	-35.8	-21.25	14.53
	VHT80 Beam Forming, M0 to M9 2ss	3	13	-57.2	-52.8	-54.0		0.2	-36.3	-21.25	15.07
	VHT80 Beam Forming, M0 to M9 3ss	3	13	-57.2	-52.8	-54.0		0.2	-36.3	-21.25	15.07
	VHT80 Beam Forming, M0 to M9 1ss	4	16	-59.5	-56.0	-57.5	-57.6	0.2	-35.2	-21.25	13.99
	VHT80 Beam Forming, M0 to M9 2ss	4	13	-58.5	-53.7	-54.1	-56.7	0.2	-36.1	-21.25	14.85
	VHT80 Beam Forming, M0 to M9 3ss	4	13	-58.5	-53.7	-54.1	-56.7	0.2	-36.1	-21.25	14.85
	VHT80 Beam Forming, M0 to M9 4ss	4	13	-58.5	-53.7	-54.1	-56.7	0.2	-36.1	-21.25	14.85
	VHT80 STBC, M0 to M9 1ss	2	13	-57.2	-52.8			0.2	-38.2	-21.25	16.99
	VHT80 STBC, M0 to M9 1ss	3	13	-57.2	-52.8	-54.0		0.2	-36.3	-21.25	15.07
	VHT80 STBC, M0 to M9 1ss	4	13	-58.5	-53.7	-54.1	-56.7	0.2	-36.1	-21.25	14.85
	HE80, M0 to M9 1ss	1	13	-57.6				0.3	-44.3	-21.25	23.09
	HE80, M0 to M9 1ss	2	13	-57.6	-52.7			0.3	-38.2	-21.25	16.97
	HE80, M0 to M9 2ss	2	13	-57.6	-52.7			0.3	-38.2	-21.25	16.97
	HE80, M0 to M9 1ss	3	13	-57.9	-53.0	-54.9		0.3	-36.8	-21.25	15.55
	HE80, M0 to M9 2ss	3	13	-57.9	-53.0	-54.9		0.3	-36.8	-21.25	15.55
	HE80, M0 to M9 3ss	3	13	-57.9	-53.0	-54.9		0.3	-36.8	-21.25	15.55
	HE80, M0 to M9 1ss	4	13	-57.9	-53.0	-54.9	-57.2	0.3	-36.0	-21.25	14.78
	HE80, M0 to M9 2ss	4	13	-57.9	-53.0	-54.9	-57.2	0.3	-36.0	-21.25	14.78
	HE80, M0 to M9 3ss	4	13	-57.9	-53.0	-54.9	-57.2	0.3	-36.0	-21.25	14.78
	HE80, M0 to M9 4ss	4	13	-57.9	-53.0	-54.9	-57.2	0.3	-36.0	-21.25	14.78
	HE80 Beam Forming, M0 to M9 1ss	2	13	-57.6	-52.7			0.3	-38.2	-21.25	16.97
	HE80 Beam Forming, M0 to M9 2ss	2	13	-57.6	-52.7			0.3	-38.2	-21.25	16.97
	HE80 Beam Forming, M0 to M9 1ss	3	15	-59.6	-55.3	-55.6		0.3	-36.4	-21.25	15.16
	HE80 Beam Forming, M0 to M9 2ss	3	13	-57.9	-53.0	-54.9		0.3	-36.8	-21.25	15.55
	HE80 Beam Forming, M0 to M9 3ss	3	13	-57.9	-53.0	-54.9		0.3	-36.8	-21.25	15.55
	HE80 Beam Forming, M0 to M9 1ss	4	16	-59.9	-56.1	-56.8	-58.3	0.3	-35.3	-21.25	14.01
	HE80 Beam Forming, M0 to M9 2ss	4	13	-57.9	-53.0	-54.9	-57.2	0.3	-36.0	-21.25	14.78
	HE80 Beam Forming, M0 to M9 3ss	4	13	-57.9	-53.0	-54.9	-57.2	0.3	-36.0	-21.25	14.78
	HE80 Beam Forming, M0 to M9 4ss	4	13	-57.9	-53.0	-54.9	-57.2	0.3	-36.0	-21.25	14.78
	HE80 STBC, M0 to M9 1ss	2	13	-57.6	-52.7			0.3	-38.2	-21.25	16.97
	HE80 STBC, M0 to M9 1ss	3	13	-57.9	-53.0	-54.9		0.3	-36.8	-21.25	15.55
	HE80 STBC, M0 to M9 1ss	4	13	-57.9	-53.0	-54.9	-57.2	0.3	-36.0	-21.25	14.78
5300	Non HT20, 6 to 54 Mbps	1	13	-54.3				0.0	-41.3	-21.25	20.01
	Non HT20, 6 to 54 Mbps	2	13	-54.3	-49.7			0.0	-35.4	-21.25	14.11
	Non HT20, 6 to 54 Mbps	3	13	-55.0	-52.0	-52.6		0.0	-35.2	-21.25	13.95
	Non HT20, 6 to 54 Mbps	4	13	-56.5	-52.1	-53.3	-56.0	0.0	-35.0	-21.25	13.78
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-55.3	-50.5			0.0	-36.2	-21.25	14.96
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-57.6	-53.1	-55.1		0.0	-35.1	-21.25	13.83



Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-58.7	-55.5	-57.1	-60.0	0.0	-35.4	-21.25	14.18
HT/VHT20, M0 to M7	1	13	-54.5				0.1	-41.4	-21.25	20.20
HT/VHT20, M0 to M7	2	13	-54.5	-49.1			0.1	-34.9	-21.25	13.70
HT/VHT20, M8 to M15	2	13	-54.5	-49.1			0.1	-34.9	-21.25	13.70
HT/VHT20, M0 to M7	3	13	-54.9	-50.8	-52.9		0.1	-34.7	-21.25	13.48
HT/VHT20, M8 to M15	3	13	-54.9	-50.8	-52.9		0.1	-34.7	-21.25	13.48
HT/VHT20, M16 to M23	3	13	-54.9	-50.8	-52.9		0.1	-34.7	-21.25	13.48
HT/VHT20, M0 to M7	4	13	-56.3	-52.4	-53.2	-54.9	0.1	-34.9	-21.25	13.62
HT/VHT20, M8 to M15	4	13	-56.3	-52.4	-53.2	-54.9	0.1	-34.9	-21.25	13.62
HT/VHT20, M16 to M23	4	13	-56.3	-52.4	-53.2	-54.9	0.1	-34.9	-21.25	13.62
HT/VHT20, M24 to M31	4	13	-56.3	-52.4	-53.2	-54.9	0.1	-34.9	-21.25	13.62
HT/VHT20 Beam Forming, M0 to M7	2	13	-54.9	-50.9			0.1	-36.4	-21.25	15.14
HT/VHT20 Beam Forming, M8 to M15	2	13	-54.5	-49.1			0.1	-34.9	-21.25	13.70
HT/VHT20 Beam Forming, M0 to M7	3	15	-58.0	-53.3	-54.2		0.1	-34.9	-21.25	13.67
HT/VHT20 Beam Forming, M8 to M15	3	13	-54.9	-50.8	-52.9		0.1	-34.7	-21.25	13.48
HT/VHT20 Beam Forming, M16 to M23	3	13	-54.9	-50.8	-52.9		0.1	-34.7	-21.25	13.48
HT/VHT20 Beam Forming, M0 to M7	4	16	-58.0	-55.4	-56.7	-57.9	0.1	-34.8	-21.25	13.54
HT/VHT20 Beam Forming, M8 to M15	4	13	-57.7	-51.6	-54.0	-56.4	0.1	-35.2	-21.25	13.97
HT/VHT20 Beam Forming, M16 to M23	4	13	-56.3	-52.4	-53.2	-54.9	0.1	-34.9	-21.25	13.62
HT/VHT20 Beam Forming, M24 to M31	4	13	-56.3	-52.4	-53.2	-54.9	0.1	-34.9	-21.25	13.62
HT/VHT20 STBC, M0 to M7	2	13	-54.5	-49.1			0.1	-34.9	-21.25	13.70
HT/VHT20 STBC, M0 to M7	3	13	-54.9	-50.8	-52.9		0.1	-34.7	-21.25	13.48
HT/VHT20 STBC, M0 to M7	4	13	-57.7	-51.6	-54.0	-56.4	0.1	-35.2	-21.25	13.97
HE20, M0 to M9 1ss	1	13	-54.2				0.1	-41.1	-21.25	19.88
HE20, M0 to M9 1ss	2	13	-54.2	-48.2			0.1	-34.2	-21.25	12.91
HE20, M0 to M9 2ss	2	13	-54.2	-48.2			0.1	-34.2	-21.25	12.91
HE20, M0 to M9 1ss	3	13	-56.0	-52.0	-52.9		0.1	-35.5	-21.25	14.23
HE20, M0 to M9 2ss	3	13	-56.0	-52.0	-52.9		0.1	-35.5	-21.25	14.23
HE20, M0 to M9 3ss	3	13	-56.0	-52.0	-52.9		0.1	-35.5	-21.25	14.23
HE20, M0 to M9 1ss	4	13	-55.0	-52.1	-53.4	-56.6	0.1	-34.9	-21.25	13.61
HE20, M0 to M9 2ss	4	13	-55.0	-52.1	-53.4	-56.6	0.1	-34.9	-21.25	13.61
HE20, M0 to M9 3ss	4	13	-55.0	-52.1	-53.4	-56.6	0.1	-34.9	-21.25	13.61
HE20, M0 to M9 4ss	4	13	-55.0	-52.1	-53.4	-56.6	0.1	-34.9	-21.25	13.61
HE20 Beam Forming, M0 to M9 1ss	2	13	-55.7	-50.2			0.1	-36.1	-21.25	14.80
HE20 Beam Forming, M0 to M9 2ss	2	13	-54.2	-48.2			0.1	-34.2	-21.25	12.91
HE20 Beam Forming, M0 to M9 1ss	3	15	-58.0	-53.3	-54.7		0.1	-35.1	-21.25	13.83
HE20 Beam Forming, M0 to M9 2ss	3	13	-56.0	-52.0	-52.9		0.1	-35.5	-21.25	14.23
HE20 Beam Forming, M0 to M9 3ss	3	13	-56.0	-52.0	-52.9		0.1	-35.5	-21.25	14.23
HE20 Beam Forming, M0 to M9 1ss	4	16	-59.6	-55.3	-57.5	-59.6	0.1	-35.5	-21.25	14.28
HE20 Beam Forming, M0 to M9 2ss	4	13	-57.7	-52.9	-54.4	-56.1	0.1	-35.8	-21.25	14.57
HE20 Beam Forming, M0 to M9 3ss	4	13	-55.0	-52.1	-53.4	-56.6	0.1	-34.9	-21.25	13.61
HE20 Beam Forming, M0 to M9 4ss	4	13	-55.0	-52.1	-53.4	-56.6	0.1	-34.9	-21.25	13.61



	HE20 STBC, M0 to M9 2ss	2	13	-54.2	-48.2			0.1	-34.2	-21.25	12.91
	HE20 STBC, M0 to M9 2ss	3	13	-56.0	-52.0	-52.9		0.1	-35.5	-21.25	14.23
	HE20 STBC, M0 to M9 2ss	4	13	-57.7	-52.9	-54.4	-56.1	0.1	-35.8	-21.25	14.57
5310	Non HT40, 6 to 54 Mbps	1	13	-56.3				0.0	-43.3	-21.25	22.01
	Non HT40, 6 to 54 Mbps	2	13	-56.3	-51.8			0.0	-37.4	-21.25	16.19
	Non HT40, 6 to 54 Mbps	3	13	-55.8	-51.8	-53.7		0.0	-35.7	-21.25	14.40
	Non HT40, 6 to 54 Mbps	4	13	-55.8	-51.8	-53.7	-56.6	0.0	-35.0	-21.25	13.75
	HT/VHT40, M0 to M7	1	13	-56.3				0.1	-43.2	-21.25	21.95
	HT/VHT40, M0 to M7	2	13	-56.3	-52.2			0.1	-37.7	-21.25	16.42
	HT/VHT40, M8 to M15	2	13	-56.3	-52.2			0.1	-37.7	-21.25	16.42
	HT/VHT40, M0 to M7	3	13	-56.8	-51.9	-53.8		0.1	-35.9	-21.25	14.60
	HT/VHT40, M8 to M15	3	13	-56.8	-51.9	-53.8		0.1	-35.9	-21.25	14.60
	HT/VHT40, M16 to M23	3	13	-56.8	-51.9	-53.8		0.1	-35.9	-21.25	14.60
	HT/VHT40, M0 to M7	4	13	-56.8	-51.9	-53.8	-55.5	0.1	-35.0	-21.25	13.74
	HT/VHT40, M8 to M15	4	13	-56.8	-51.9	-53.8	-55.5	0.1	-35.0	-21.25	13.74
	HT/VHT40, M16 to M23	4	13	-56.8	-51.9	-53.8	-55.5	0.1	-35.0	-21.25	13.74
	HT/VHT40, M24 to M31	4	13	-56.8	-51.9	-53.8	-55.5	0.1	-35.0	-21.25	13.74
	HT/VHT40 Beam Forming, M0 to M7	2	13	-56.3	-52.2			0.1	-37.7	-21.25	16.42
	HT/VHT40 Beam Forming, M8 to M15	2	13	-56.3	-52.2			0.1	-37.7	-21.25	16.42
	HT/VHT40 Beam Forming, M0 to M7	3	15	-58.1	-52.5	-54.2		0.1	-34.5	-21.25	13.24
	HT/VHT40 Beam Forming, M8 to M15	3	13	-56.8	-51.9	-53.8		0.1	-35.9	-21.25	14.60
	HT/VHT40 Beam Forming, M16 to M23	3	13	-56.8	-51.9	-53.8		0.1	-35.9	-21.25	14.60
	HT/VHT40 Beam Forming, M0 to M7	4	16	-59.5	-56.3	-57.5	-58.1	0.1	-35.6	-21.25	14.33
	HT/VHT40 Beam Forming, M8 to M15	4	13	-56.8	-51.9	-53.8	-55.5	0.1	-35.0	-21.25	13.74
	HT/VHT40 Beam Forming, M16 to M23	4	13	-56.8	-51.9	-53.8	-55.5	0.1	-35.0	-21.25	13.74
	HT/VHT40 Beam Forming, M24 to M31	4	13	-56.8	-51.9	-53.8	-55.5	0.1	-35.0	-21.25	13.74
	HT/VHT40 STBC, M0 to M7	2	13	-56.3	-52.2			0.1	-37.7	-21.25	16.42
	HT/VHT40 STBC, M0 to M7	3	13	-56.8	-51.9	-53.8		0.1	-35.9	-21.25	14.60
	HT/VHT40 STBC, M0 to M7	4	13	-56.8	-51.9	-53.8	-55.5	0.1	-35.0	-21.25	13.74
	HE40, M0 to M9 1ss	1	13	-56.4				0.1	-43.3	-21.25	22.02
	HE40, M0 to M9 1ss	2	13	-55.2	-51.9			0.1	-37.1	-21.25	15.85
	HE40, M0 to M9 2ss	2	13	-55.2	-51.9			0.1	-37.1	-21.25	15.85
	HE40, M0 to M9 1ss	3	13	-55.2	-51.9	-53.8		0.1	-35.5	-21.25	14.27
	HE40, M0 to M9 2ss	3	13	-55.2	-51.9	-53.8		0.1	-35.5	-21.25	14.27
	HE40, M0 to M9 3ss	3	13	-55.2	-51.9	-53.8		0.1	-35.5	-21.25	14.27
	HE40, M0 to M9 1ss	4	13	-57.9	-52.9	-54.1	-57.0	0.1	-35.9	-21.25	14.60
	HE40, M0 to M9 2ss	4	13	-57.9	-52.9	-54.1	-57.0	0.1	-35.9	-21.25	14.60
	HE40, M0 to M9 3ss	4	13	-57.9	-52.9	-54.1	-57.0	0.1	-35.9	-21.25	14.60
	HE40, M0 to M9 4ss	4	13	-57.9	-52.9	-54.1	-57.0	0.1	-35.9	-21.25	14.60
	HE40 Beam Forming, M0 to M9 1ss	2	13	-55.2	-51.9			0.1	-37.1	-21.25	15.85
	HE40 Beam Forming, M0 to M9 2ss	2	13	-55.2	-51.9			0.1	-37.1	-21.25	15.85



	HE40 Beam Forming, M0 to M9 1ss	3	15	-57.9	-52.9	-54.1		0.1	-34.6	-21.25	13.35
	HE40 Beam Forming, M0 to M9 2ss	3	13	-55.2	-51.9	-53.8		0.1	-35.5	-21.25	14.27
	HE40 Beam Forming, M0 to M9 3ss	3	13	-55.2	-51.9	-53.8		0.1	-35.5	-21.25	14.27
	HE40 Beam Forming, M0 to M9 1ss	4	16	-59.2	-55.8	-57.1	-58.3	0.1	-35.3	-21.25	14.01
	HE40 Beam Forming, M0 to M9 2ss	4	13	-57.9	-52.9	-54.1	-57.0	0.1	-35.9	-21.25	14.60
	HE40 Beam Forming, M0 to M9 3ss	4	13	-57.9	-52.9	-54.1	-57.0	0.1	-35.9	-21.25	14.60
	HE40 Beam Forming, M0 to M9 4ss	4	13	-57.9	-52.9	-54.1	-57.0	0.1	-35.9	-21.25	14.60
	HE40 STBC, M0 to M9 2ss	2	13	-55.2	-51.9			0.1	-37.1	-21.25	15.85
	HE40 STBC, M0 to M9 2ss	3	13	-55.2	-51.9	-53.8		0.1	-35.5	-21.25	14.27
	HE40 STBC, M0 to M9 2ss	4	13	-57.9	-52.9	-54.1	-57.0	0.1	-35.9	-21.25	14.60
5320	Non HT20, 6 to 54 Mbps	1	13	-55.1				0.0	-42.1	-21.25	20.81
	Non HT20, 6 to 54 Mbps	2	13	-55.1	-49.5			0.0	-35.4	-21.25	14.15
	Non HT20, 6 to 54 Mbps	3	13	-56.4	-51.5	-53.3		0.0	-35.5	-21.25	14.23
	Non HT20, 6 to 54 Mbps	4	13	-56.8	-52.4	-54.1	-57.0	0.0	-35.6	-21.25	14.33
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-55.8	-51.1			0.0	-36.8	-21.25	15.54
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-59.0	-53.4	-55.7		0.0	-35.7	-21.25	14.40
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-58.2	-55.9	-57.8	-59.6	0.0	-35.6	-21.25	14.36
	HT/VHT20, M0 to M7	1	13	-55.1				0.1	-42.0	-21.25	20.80
	HT/VHT20, M0 to M7	2	13	-55.1	-49.1			0.1	-35.1	-21.25	13.82
	HT/VHT20, M8 to M15	2	13	-55.1	-49.1			0.1	-35.1	-21.25	13.82
	HT/VHT20, M0 to M7	3	13	-56.3	-50.5	-52.7		0.1	-34.7	-21.25	13.49
	HT/VHT20, M8 to M15	3	13	-56.3	-50.5	-52.7		0.1	-34.7	-21.25	13.49
	HT/VHT20, M16 to M23	3	13	-56.3	-50.5	-52.7		0.1	-34.7	-21.25	13.49
	HT/VHT20, M0 to M7	4	13	-55.2	-52.7	-54.2	-56.5	0.1	-35.4	-21.25	14.10
	HT/VHT20, M8 to M15	4	13	-55.2	-52.7	-54.2	-56.5	0.1	-35.4	-21.25	14.10
	HT/VHT20, M16 to M23	4	13	-55.2	-52.7	-54.2	-56.5	0.1	-35.4	-21.25	14.10
	HT/VHT20, M24 to M31	4	13	-55.2	-52.7	-54.2	-56.5	0.1	-35.4	-21.25	14.10
	HT/VHT20 Beam Forming, M0 to M7	2	13	-56.3	-50.5			0.1	-36.4	-21.25	15.18
	HT/VHT20 Beam Forming, M8 to M15	2	13	-55.1	-49.1			0.1	-35.1	-21.25	13.82
	HT/VHT20 Beam Forming, M0 to M7	3	15	-58.4	-53.8	-55.4		0.1	-35.7	-21.25	14.40
	HT/VHT20 Beam Forming, M8 to M15	3	13	-55.2	-52.7	-54.2		0.1	-36.1	-21.25	14.84
	HT/VHT20 Beam Forming, M16 to M23	3	13	-56.3	-50.5	-52.7		0.1	-34.7	-21.25	13.49
	HT/VHT20 Beam Forming, M0 to M7	4	16	-59.6	-56.2	-57.7	-60.6	0.1	-36.1	-21.25	14.87
	HT/VHT20 Beam Forming, M8 to M15	4	13	-58.6	-52.9	-52.9	-56.8	0.1	-35.6	-21.25	14.32
	HT/VHT20 Beam Forming, M16 to M23	4	13	-55.2	-52.7	-54.2	-56.5	0.1	-35.4	-21.25	14.10
	HT/VHT20 Beam Forming, M24 to M31	4	13	-55.2	-52.7	-54.2	-56.5	0.1	-35.4	-21.25	14.10
	HT/VHT20 STBC, M0 to M7	2	13	-55.1	-49.1			0.1	-35.1	-21.25	13.82
	HT/VHT20 STBC, M0 to M7	3	13	-55.2	-52.7	-54.2		0.1	-36.1	-21.25	14.84
	HT/VHT20 STBC, M0 to M7	4	13	-58.6	-52.9	-52.9	-56.8	0.1	-35.6	-21.25	14.32
	HE20, M0 to M9 1ss	1	13	-54.5				0.1	-41.4	-21.25	20.18
	HE20, M0 to M9 1ss	2	13	-54.5	-49.0			0.1	-34.9	-21.25	13.60



	HE20, M0 to M9 2ss	2	13	-54.5	-49.0			0.1	-34.9	-21.25	13.60
	HE20, M0 to M9 1ss	3	13	-54.6	-51.8	-52.3		0.1	-34.9	-21.25	13.65
	HE20, M0 to M9 2ss	3	13	-54.6	-51.8	-52.3		0.1	-34.9	-21.25	13.65
	HE20, M0 to M9 3ss	3	13	-54.6	-51.8	-52.3		0.1	-34.9	-21.25	13.65
	HE20, M0 to M9 1ss	4	13	-56.3	-52.2	-54.2	-55.9	0.1	-35.2	-21.25	13.99
	HE20, M0 to M9 2ss	4	13	-56.3	-52.2	-54.2	-55.9	0.1	-35.2	-21.25	13.99
	HE20, M0 to M9 3ss	4	13	-56.3	-52.2	-54.2	-55.9	0.1	-35.2	-21.25	13.99
	HE20, M0 to M9 4ss	4	13	-56.3	-52.2	-54.2	-55.9	0.1	-35.2	-21.25	13.99
	HE20 Beam Forming, M0 to M9 1ss	2	13	-54.6	-51.8			0.1	-36.9	-21.25	15.65
	HE20 Beam Forming, M0 to M9 2ss	2	13	-54.5	-49.0			0.1	-34.9	-21.25	13.60
	HE20 Beam Forming, M0 to M9 1ss	3	15	-58.6	-53.3	-54.2		0.1	-35.0	-21.25	13.74
	HE20 Beam Forming, M0 to M9 2ss	3	13	-56.3	-52.2	-54.2		0.1	-36.1	-21.25	14.83
	HE20 Beam Forming, M0 to M9 3ss	3	13	-54.6	-51.8	-52.3		0.1	-34.9	-21.25	13.65
	HE20 Beam Forming, M0 to M9 1ss	4	16	-59.0	-55.4	-58.0	-59.4	0.1	-35.6	-21.25	14.31
	HE20 Beam Forming, M0 to M9 2ss	4	13	-57.3	-51.7	-54.9	-57.5	0.1	-35.6	-21.25	14.33
	HE20 Beam Forming, M0 to M9 3ss	4	13	-56.3	-52.2	-54.2	-55.9	0.1	-35.2	-21.25	13.99
	HE20 Beam Forming, M0 to M9 4ss	4	13	-56.3	-52.2	-54.2	-55.9	0.1	-35.2	-21.25	13.99
	HE20 STBC, M0 to M9 2ss	2	13	-54.5	-49.0			0.1	-34.9	-21.25	13.60
	HE20 STBC, M0 to M9 2ss	3	13	-56.3	-52.2	-54.2		0.1	-36.1	-21.25	14.83
	HE20 STBC, M0 to M9 2ss	4	13	-57.3	-51.7	-54.9	-57.5	0.1	-35.6	-21.25	14.33
5250	Non HT160, 6 to 54 Mbps	1	13	-53.8				0.0	-40.8	-21.25	19.50
	Non HT160, 6 to 54 Mbps	2	13	-53.8	-51.1			0.0	-36.2	-21.25	14.93
	Non HT160, 6 to 54 Mbps	3	13	-53.8	-51.1	-52.2		0.0	-34.4	-21.25	13.16
	Non HT160, 6 to 54 Mbps	4	13	-54.5	-52.3	-53.2	-55.3	0.0	-34.6	-21.25	13.35
	VHT160, M0 to M9 1ss	1	13	-55.5				0.4	-42.1	-21.25	20.86
	VHT160, M0 to M9 1ss	2	13	-55.5	-52.5			0.4	-37.3	-21.25	16.09
	VHT160, M0 to M9 2ss	2	13	-55.5	-52.5			0.4	-37.3	-21.25	16.09
	VHT160, M0 to M9 1ss	3	13	-55.5	-52.5	-53.2		0.4	-35.4	-21.25	14.14
	VHT160, M0 to M9 2ss	3	13	-55.5	-52.5	-53.2		0.4	-35.4	-21.25	14.14
	VHT160, M0 to M9 3ss	3	13	-55.5	-52.5	-53.2		0.4	-35.4	-21.25	14.14
	VHT160, M0 to M9 1ss	4	13	-56.6	-52.4	-53.6	-55.6	0.4	-34.8	-21.25	13.58
	VHT160, M0 to M9 2ss	4	13	-56.6	-52.4	-53.6	-55.6	0.4	-34.8	-21.25	13.58
	VHT160, M0 to M9 3ss	4	13	-56.6	-52.4	-53.6	-55.6	0.4	-34.8	-21.25	13.58
	VHT160, M0 to M9 4ss	4	13	-56.6	-52.4	-53.6	-55.6	0.4	-34.8	-21.25	13.58
	VHT160 Beam Forming, M0 to M9 1ss	2	13	-55.5	-52.5			0.4	-37.3	-21.25	16.09
	VHT160 Beam Forming, M0 to M9 2ss	2	13	-55.5	-52.5			0.4	-37.3	-21.25	16.09
	VHT160 Beam Forming, M0 to M9 1ss	3	15	-56.6	-52.4	-53.6		0.4	-33.7	-21.25	12.46
	VHT160 Beam Forming, M0 to M9 2ss	3	13	-55.5	-52.5	-53.2		0.4	-35.4	-21.25	14.14
	VHT160 Beam Forming, M0 to M9 3ss	3	13	-55.5	-52.5	-53.2		0.4	-35.4	-21.25	14.14
	VHT160 Beam Forming, M0 to M9 1ss	4	16	-56.8	-53.2	-55.1	-56.5	0.4	-32.7	-21.25	11.49
	VHT160 Beam Forming, M0 to M9 2ss	4	13	-56.6	-52.4	-53.6	-55.6	0.4	-34.8	-21.25	13.58



VHT160 Beam Forming, M0 to M9 3ss	4	13	-56.6	-52.4	-53.6	-55.6	0.4	-34.8	-21.25	13.58
VHT160 Beam Forming, M0 to M9 4ss	4	13	-56.6	-52.4	-53.6	-55.6	0.4	-34.8	-21.25	13.58
VHT160 STBC, M0 to M9 1ss	2	13	-55.5	-52.5			0.4	-37.3	-21.25	16.09
VHT160 STBC, M0 to M9 1ss	3	13	-55.5	-52.5	-53.2		0.4	-35.4	-21.25	14.14
VHT160 STBC, M0 to M9 1ss	4	13	-56.6	-52.4	-53.6	-55.6	0.4	-34.8	-21.25	13.58
HE160, M0 to M9 1ss	1	13	-54.3				0.4	-40.9	-21.25	19.62
HE160, M0 to M9 1ss	2	13	-54.3	-50.5			0.4	-35.6	-21.25	14.30
HE160, M0 to M9 2ss	2	13	-54.3	-50.5			0.4	-35.6	-21.25	14.30
HE160, M0 to M9 1ss	3	13	-55.6	-51.2	-52.5		0.4	-34.5	-21.25	13.28
HE160, M0 to M9 2ss	3	13	-55.6	-51.2	-52.5		0.4	-34.5	-21.25	13.28
HE160, M0 to M9 3ss	3	13	-55.6	-51.2	-52.5		0.4	-34.5	-21.25	13.28
HE160, M0 to M9 1ss	4	13	-55.6	-51.2	-52.5	-55.2	0.4	-33.8	-21.25	12.53
HE160, M0 to M9 2ss	4	13	-55.6	-51.2	-52.5	-55.2	0.4	-33.8	-21.25	12.53
HE160, M0 to M9 3ss	4	13	-55.6	-51.2	-52.5	-55.2	0.4	-33.8	-21.25	12.53
HE160, M0 to M9 4ss	4	13	-55.6	-51.2	-52.5	-55.2	0.4	-33.8	-21.25	12.53
HE160 Beam Forming, M0 to M9 1ss	2	13	-54.3	-50.5			0.4	-35.6	-21.25	14.30
HE160 Beam Forming, M0 to M9 2ss	2	13	-54.3	-50.5			0.4	-35.6	-21.25	14.30
HE160 Beam Forming, M0 to M9 1ss	3	15	-55.6	-51.2	-52.5		0.4	-32.5	-21.25	11.28
HE160 Beam Forming, M0 to M9 2ss	3	13	-55.6	-51.2	-52.5		0.4	-34.5	-21.25	13.28
HE160 Beam Forming, M0 to M9 3ss	3	13	-55.6	-51.2	-52.5		0.4	-34.5	-21.25	13.28
HE160 Beam Forming, M0 to M9 1ss	4	16	-56.6	-54.3	-56.1	-55.7	0.4	-33.1	-21.25	11.88
HE160 Beam Forming, M0 to M9 2ss	4	13	-55.6	-51.2	-52.5	-55.2	0.4	-33.8	-21.25	12.53
HE160 Beam Forming, M0 to M9 3ss	4	13	-55.6	-51.2	-52.5	-55.2	0.4	-33.8	-21.25	12.53
HE160 Beam Forming, M0 to M9 4ss	4	13	-55.6	-51.2	-52.5	-55.2	0.4	-33.8	-21.25	12.53
HE160 STBC, M0 to M9 1ss	2	13	-54.3	-50.5			0.4	-35.6	-21.25	14.30
HE160 STBC, M0 to M9 1ss	3	13	-55.6	-51.2	-52.5		0.4	-34.5	-21.25	13.28
HE160 STBC, M0 to M9 1ss	4	13	-55.6	-51.2	-52.5	-55.2	0.4	-33.8	-21.25	12.53

Conducted Spurs Peak, 5250 MHz, HE160 Beam Forming, M0 to M9 1ss**Antenna A****Antenna B****Antenna C**

A.6 Conducted Receiver Spurious Emissions

Spurious Of Receive Average Upp, 5260 MHz, Non HT20, 6 to 54 Mbps



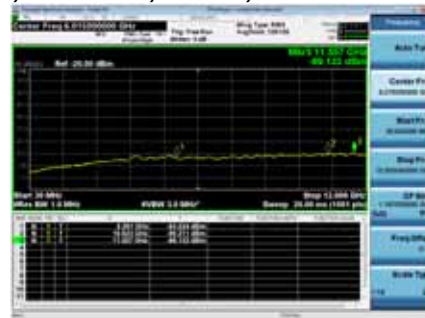
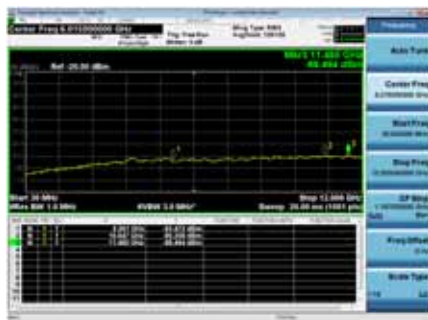
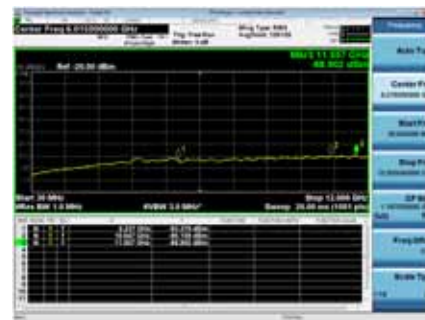
Spurious Of Receive Peak Upper, 5260 MHz, Non HT20, 6 to 54 Mbps





Conducted Spurious of Receive Average Table

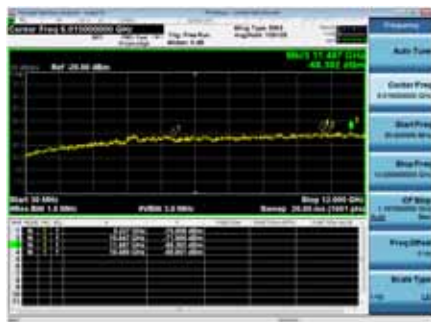
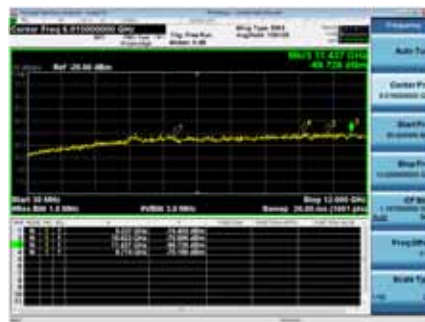
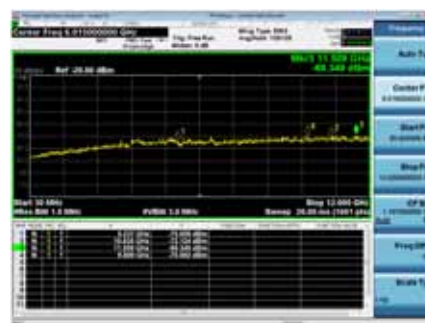
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Rx 1 Spur Power (dBm)	Rx 2 Spur Power (dBm)	Rx 3 Spur Power (dBm)	Rx 4 Spur Power (dBm)	Duty Cycle Correction (dB)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5260	Non HT20, 6 to 54 Mbps	4	13	-88.8	-89.1	-89.2	-88.7	0.0	-69.9	-41.25	28.63
	HT/VHT20, M0 to M7	4	13	-88.3	-89.1	-89.0	-89.0	0.1	-69.8	-41.25	28.51
	HE20, M0 to M9 1ss	4	13	-88.6	-88.9	-88.9	-89.1	0.1	-69.8	-41.25	28.53
5270	Non HT40, 6 to 54 Mbps	4	13	-88.8	-89.1	-89.2	-89.2	0.0	-70.0	-41.25	28.76
	HT/VHT40, M0 to M7	4	13	-89.0	-89.6	-89.4	-89.3	0.1	-70.2	-41.25	28.95
	HE40, M0 to M9 1ss	4	13	-88.6	-89.3	-89.2	-89.2	0.1	-69.9	-41.25	28.67
5290	Non HT80, 6 to 54 Mbps	4	13	-88.4	-89.3	-88.7	-89.1	0.1	-69.8	-41.25	28.54
	VHT80, M0 to M9 1ss	4	13	-88.6	-89.3	-89.3	-88.8	0.2	-69.8	-41.25	28.50
	HE80, M0 to M9 1ss	4	13	-89.0	-89.1	-89.3	-89.0	0.3	-69.8	-41.25	28.57
5300	Non HT20, 6 to 54 Mbps	4	13	-88.8	-89.1	-88.8	-88.8	0.0	-69.8	-41.25	28.56
	HT/VHT20, M0 to M7	4	13	-88.7	-89.2	-89.1	-89.3	0.1	-70.0	-41.25	28.75
	HE20, M0 to M9 1ss	4	13	-89.0	-89.2	-88.8	-88.9	0.1	-69.9	-41.25	28.63
5310	Non HT40, 6 to 54 Mbps	4	13	-88.4	-88.9	-88.6	-88.5	0.0	-69.5	-41.25	28.28
	HT/VHT40, M0 to M7	4	13	-88.7	-89.5	-88.6	-89.5	0.1	-69.9	-41.25	28.68
	HE40, M0 to M9 1ss	4	13	-89.4	-89.5	-89.4	-89.6	0.1	-70.3	-41.25	29.07
5320	Non HT20, 6 to 54 Mbps	4	13	-88.2	-89.3	-88.8	-88.4	0.0	-69.6	-41.25	28.34
	HT/VHT20, M0 to M7	4	13	-88.5	-89.0	-88.9	-89.1	0.1	-69.8	-41.25	28.55
	HE20, M0 to M9 1ss	4	13	-88.4	-89.0	-88.6	-88.7	0.1	-69.6	-41.25	28.33
5250	Non HT160, 6 to 54 Mbps	4	13	-88.4	-88.7	-88.8	-88.8	0.0	-69.6	-41.25	28.35
	VHT160, M0 to M9 1ss	4	13	-88.7	-88.8	-88.5	-88.9	0.4	-69.3	-41.25	28.06
	HE160, M0 to M9 1ss	4	13	-88.4	-89.1	-88.5	-88.9	0.4	-69.3	-41.25	28.01

**Spurious Of Receive Average, 5250 MHz, HE160, M0 to M9 1ss****Antenna A****Antenna B****Antenna C****Antenna D**



Conducted Spurious of Receive Peak Table

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Rx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5260	Non HT20, 6 to 54 Mbps	4	13	-68.3	-69.4	-68.4	-69.2	-49.7	-21.25	28.48
	HT/VHT20, M0 to M7	4	13	-69.2	-68.9	-69.4	-68.8	-50.0	-21.25	28.75
	HE20, M0 to M9 1ss	4	13	-69.0	-69.6	-68.4	-69.3	-50.0	-21.25	28.71
5270	Non HT40, 6 to 54 Mbps	4	13	-69.5	-70.0	-68.8	-69.5	-50.4	-21.25	29.11
	HT/VHT40, M0 to M7	4	13	-69.9	-69.1	-69.3	-69.2	-50.2	-21.25	28.99
	HE40, M0 to M9 1ss	4	13	-68.0	-69.9	-68.1	-69.9	-49.7	-21.25	28.48
5290	Non HT80, 6 to 54 Mbps	4	13	-69.4	-69.5	-69.3	-69.5	-50.4	-21.25	29.10
	VHT80, M0 to M9 1ss	4	13	-69.4	-69.4	-69.0	-69.3	-50.0	-21.25	28.79
	HE80, M0 to M9 1ss	4	13	-68.6	-69.8	-69.1	-69.4	-49.9	-21.25	28.67
5300	Non HT20, 6 to 54 Mbps	4	13	-68.6	-69.2	-68.3	-69.2	-49.7	-21.25	28.49
	HT/VHT20, M0 to M7	4	13	-69.0	-69.3	-69.6	-69.7	-50.3	-21.25	29.07
	HE20, M0 to M9 1ss	4	13	-69.6	-69.8	-68.8	-68.7	-50.1	-21.25	28.86
5310	Non HT40, 6 to 54 Mbps	4	13	-69.0	-70.1	-69.5	-69.0	-50.3	-21.25	29.06
	HT/VHT40, M0 to M7	4	13	-69.4	-68.3	-69.4	-69.6	-50.0	-21.25	28.77
	HE40, M0 to M9 1ss	4	13	-69.3	-70.1	-68.9	-69.2	-50.2	-21.25	28.95
5320	Non HT20, 6 to 54 Mbps	4	13	-68.9	-69.8	-69.6	-69.1	-50.3	-21.25	29.02
	HT/VHT20, M0 to M7	4	13	-69.0	-69.3	-69.9	-69.4	-50.3	-21.25	29.07
	HE20, M0 to M9 1ss	4	13	-69.1	-69.0	-69.2	-69.0	-50.0	-21.25	28.73
5250	Non HT160, 6 to 54 Mbps	4	13	-68.1	-69.1	-69.0	-69.8	-49.9	-21.25	28.64
	VHT160, M0 to M9 1ss	4	13	-68.4	-69.7	-68.8	-69.3	-49.6	-21.25	28.36
	HE160, M0 to M9 1ss	4	13	-68.8	-68.9	-69.5	-69.2	-49.6	-21.25	28.39

Spurious Of Receive Peak, 5250 MHz, VHT160, M0 to M9 1ss**Antenna A****Antenna B****Antenna C****Antenna D**



A.7 Conducted Bandedge

Conducted Band Edge Test Requirement

15.407(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

2. Unwanted Emissions that fall Outside of the Restricted Bands

a) For all measurements, follow the requirements in II.G.3. “General Requirements for Unwanted Emissions Measurements.”

b) At frequencies below 1000 MHz, use the procedure described in II.G.4. “Procedure for Unwanted Emissions Measurements Below 1000 MHz.”

c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in II.G.5., “Procedure for Unwanted Emissions Measurements Above 1000 MHz.”

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³

Conducted Band Edge Test Procedure

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Ref. ANSI C63.10: 2013

Conducted Spurious Emissions

Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Use the peak marker function to determine the maximum spurs amplitude level.
5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. (see ANSI C63.10:2013 section 14.3.2.2)
6. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (Peak) and 12.7.7.2 (Average)

KDB 789033 D02 General UNII Test Procedures New Rules v02r01, Sec. 5 (Peak), Sec. 6 (Average Method AD)

Conducted Spurious Emissions

Test parameters



Peak RBW = 1 MHz VBW $\geq$ 3 MHz Sweep = Auto Detector = Peak Trace = Max Hold.	Average RBW = 1 MHz VBW $\geq$ 3 MHz Sweep = Auto Detector = RMS Power Averaging
--	--

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01+S02	☒	☐
	Support		☐	☒

Tested By : Chris Blair	Date of testing: 11-Sep-19 - 25-Sep-19
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment



Conducted Bandedge Average Table

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Duty Cycle Correction (dB)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5290	Non HT80, 6 to 54 Mbps	1	13	-55.2				0.1	-42.1	-41.25	0.90
	Non HT80, 6 to 54 Mbps	2	13	-55.2	-61.6			0.1	-41.3	-41.25	0.00
	Non HT80, 6 to 54 Mbps	3	13	-58.0	-62.6	-60.2		0.1	-42.1	-41.25	0.80
	Non HT80, 6 to 54 Mbps	4	13	-60.0	-63.6	-61.0	-61.8	0.1	-42.3	-41.25	1.09
	VHT80, M0 to M9 1ss	1	13	-54.6				0.2	-41.4	-41.25	0.13
	VHT80, M0 to M9 1ss	2	13	-57.2	-62.0			0.2	-42.7	-41.25	1.49
	VHT80, M0 to M9 2ss	2	13	-57.2	-62.0			0.2	-42.7	-41.25	1.49
	VHT80, M0 to M9 1ss	3	13	-57.2	-62.0	-60.9		0.2	-41.5	-41.25	0.28
	VHT80, M0 to M9 2ss	3	13	-57.2	-62.0	-60.9		0.2	-41.5	-41.25	0.28
	VHT80, M0 to M9 3ss	3	13	-57.2	-62.0	-60.9		0.2	-41.5	-41.25	0.28
	VHT80, M0 to M9 1ss	4	13	-59.3	-62.6	-62.0	-61.6	0.2	-41.9	-41.25	0.70
	VHT80, M0 to M9 2ss	4	13	-59.3	-62.6	-62.0	-61.6	0.2	-41.9	-41.25	0.70
	VHT80, M0 to M9 3ss	4	13	-59.3	-62.6	-62.0	-61.6	0.2	-41.9	-41.25	0.70
	VHT80, M0 to M9 4ss	4	13	-59.3	-62.6	-62.0	-61.6	0.2	-41.9	-41.25	0.70
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-57.2	-62.0			0.2	-42.7	-41.25	1.49
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-57.2	-62.0			0.2	-42.7	-41.25	1.49
	VHT80 Beam Forming, M0 to M9 1ss	3	15	-61.5	-63.9	-62.7		0.2	-42.6	-41.25	1.35
	VHT80 Beam Forming, M0 to M9 2ss	3	13	-57.2	-62.0	-60.9		0.2	-41.5	-41.25	0.28
	VHT80 Beam Forming, M0 to M9 3ss	3	13	-57.2	-62.0	-60.9		0.2	-41.5	-41.25	0.28
	VHT80 Beam Forming, M0 to M9 1ss	4	16	-63.4	-64.7	-64.2	-64.1	0.2	-41.8	-41.25	0.59
	VHT80 Beam Forming, M0 to M9 2ss	4	13	-59.3	-62.6	-62.0	-61.6	0.2	-41.9	-41.25	0.70
	VHT80 Beam Forming, M0 to M9 3ss	4	13	-59.3	-62.6	-62.0	-61.6	0.2	-41.9	-41.25	0.70
	VHT80 Beam Forming, M0 to M9 4ss	4	13	-59.3	-62.6	-62.0	-61.6	0.2	-41.9	-41.25	0.70
	VHT80 STBC, M0 to M9 1ss	2	13	-57.2	-62.0			0.2	-42.7	-41.25	1.49
	VHT80 STBC, M0 to M9 1ss	3	13	-57.2	-62.0	-60.9		0.2	-41.5	-41.25	0.28
	VHT80 STBC, M0 to M9 1ss	4	13	-59.3	-62.6	-62.0	-61.6	0.2	-41.9	-41.25	0.70
	HE80, M0 to M9 1ss	1	13	-57.1				0.3	-43.8	-41.25	2.59
	HE80, M0 to M9 1ss	2	13	-57.1	-61.6			0.3	-42.5	-41.25	1.27



	HE80, M0 to M9 2ss	2	13	-57.1	-61.6			0.3	-42.5	-41.25	1.27
	HE80, M0 to M9 1ss	3	13	-58.4	-62.4	-61.3		0.3	-42.3	-41.25	1.08
	HE80, M0 to M9 2ss	3	13	-58.4	-62.4	-61.3		0.3	-42.3	-41.25	1.08
	HE80, M0 to M9 3ss	3	13	-58.4	-62.4	-61.3		0.3	-42.3	-41.25	1.08
	HE80, M0 to M9 1ss	4	13	-58.4	-62.4	-61.3	-62.2	0.3	-41.5	-41.25	0.22
	HE80, M0 to M9 2ss	4	13	-58.4	-62.4	-61.3	-62.2	0.3	-41.5	-41.25	0.22
	HE80, M0 to M9 3ss	4	13	-58.4	-62.4	-61.3	-62.2	0.3	-41.5	-41.25	0.22
	HE80, M0 to M9 4ss	4	13	-58.4	-62.4	-61.3	-62.2	0.3	-41.5	-41.25	0.22
	HE80 Beam Forming, M0 to M9 1ss	2	13	-57.1	-61.6			0.3	-42.5	-41.25	1.27
	HE80 Beam Forming, M0 to M9 2ss	2	13	-57.1	-61.6			0.3	-42.5	-41.25	1.27
	HE80 Beam Forming, M0 to M9 1ss	3	15	-60.6	-63.4	-62.2		0.3	-41.9	-41.25	0.63
	HE80 Beam Forming, M0 to M9 2ss	3	13	-58.4	-62.4	-61.3		0.3	-42.3	-41.25	1.08
	HE80 Beam Forming, M0 to M9 3ss	3	13	-58.4	-62.4	-61.3		0.3	-42.3	-41.25	1.08
	HE80 Beam Forming, M0 to M9 1ss	4	16	-62.9	-64.8	-63.5	-63.3	0.3	-41.3	-41.25	0.04
	HE80 Beam Forming, M0 to M9 2ss	4	13	-58.4	-62.4	-61.3	-62.2	0.3	-41.5	-41.25	0.22
	HE80 Beam Forming, M0 to M9 3ss	4	13	-58.4	-62.4	-61.3	-62.2	0.3	-41.5	-41.25	0.22
	HE80 Beam Forming, M0 to M9 4ss	4	13	-58.4	-62.4	-61.3	-62.2	0.3	-41.5	-41.25	0.22
	HE80 STBC, M0 to M9 1ss	2	13	-57.1	-61.6			0.3	-42.5	-41.25	1.27
	HE80 STBC, M0 to M9 1ss	3	13	-58.4	-62.4	-61.3		0.3	-42.3	-41.25	1.08
	HE80 STBC, M0 to M9 1ss	4	13	-58.4	-62.4	-61.3	-62.2	0.3	-41.5	-41.25	0.22
5310	Non HT40, 6 to 54 Mbps	1	13	-55.8				0.0	-42.8	-41.25	1.51
	Non HT40, 6 to 54 Mbps	2	13	-55.8	-60.8			0.0	-41.6	-41.25	0.31
	Non HT40, 6 to 54 Mbps	3	13	-58.2	-61.6	-61.6		0.0	-42.3	-41.25	1.09
	Non HT40, 6 to 54 Mbps	4	13	-58.2	-61.6	-61.6	-62.0	0.0	-41.5	-41.25	0.23
	HT/VHT40, M0 to M7	1	13	-56.8				0.1	-43.7	-41.25	2.45
	HT/VHT40, M0 to M7	2	13	-56.8	-60.9			0.1	-42.3	-41.25	1.02
	HT/VHT40, M8 to M15	2	13	-56.8	-60.9			0.1	-42.3	-41.25	1.02
	HT/VHT40, M0 to M7	3	13	-59.0	-61.7	-61.7		0.1	-42.7	-41.25	1.48
	HT/VHT40, M8 to M15	3	13	-59.0	-61.7	-61.7		0.1	-42.7	-41.25	1.48
	HT/VHT40, M16 to M23	3	13	-59.0	-61.7	-61.7		0.1	-42.7	-41.25	1.48
	HT/VHT40, M0 to M7	4	13	-59.0	-61.7	-61.7	-61.8	0.1	-41.7	-41.25	0.50
	HT/VHT40, M8 to M15	4	13	-59.0	-61.7	-61.7	-61.8	0.1	-41.7	-41.25	0.50
	HT/VHT40, M16 to M23	4	13	-59.0	-61.7	-61.7	-61.8	0.1	-41.7	-41.25	0.50
	HT/VHT40, M24 to M31	4	13	-59.0	-61.7	-61.7	-61.8	0.1	-41.7	-41.25	0.50
	HT/VHT40 Beam Forming, M0 to M7	2	13	-56.8	-60.9			0.1	-42.3	-41.25	1.02
	HT/VHT40 Beam Forming, M8 to M15	2	13	-56.8	-60.9			0.1	-42.3	-41.25	1.02
	HT/VHT40 Beam Forming, M0 to M7	3	15	-61.3	-63.2	-62.4		0.1	-42.4	-41.25	1.11
	HT/VHT40 Beam Forming, M8 to M15	3	13	-59.0	-61.7	-61.7		0.1	-42.7	-41.25	1.48
	HT/VHT40 Beam Forming, M16 to M23	3	13	-59.0	-61.7	-61.7		0.1	-42.7	-41.25	1.48
	HT/VHT40 Beam Forming, M0 to M7	4	16	-65.2	-65.0	-64.6	-65.2	0.1	-42.9	-41.25	1.62
	HT/VHT40 Beam Forming, M8 to M15	4	13	-59.0	-61.7	-61.7	-61.8	0.1	-41.7	-41.25	0.50



	HT/VHT40 Beam Forming, M16 to M23	4	13	-59.0	-61.7	-61.7	-61.8	0.1	-41.7	-41.25	0.50
	HT/VHT40 Beam Forming, M24 to M31	4	13	-59.0	-61.7	-61.7	-61.8	0.1	-41.7	-41.25	0.50
	HT/VHT40 STBC, M0 to M7	2	13	-56.8	-60.9			0.1	-42.3	-41.25	1.02
	HT/VHT40 STBC, M0 to M7	3	13	-59.0	-61.7	-61.7		0.1	-42.7	-41.25	1.48
	HT/VHT40 STBC, M0 to M7	4	13	-59.0	-61.7	-61.7	-61.8	0.1	-41.7	-41.25	0.50
	HE40, M0 to M9 1ss	1	13	-54.7				0.1	-41.6	-41.25	0.32
	HE40, M0 to M9 1ss	2	13	-56.8	-61.2			0.1	-42.3	-41.25	1.07
	HE40, M0 to M9 2ss	2	13	-56.8	-61.2			0.1	-42.3	-41.25	1.07
	HE40, M0 to M9 1ss	3	13	-56.8	-61.2	-61.4		0.1	-41.3	-41.25	0.09
	HE40, M0 to M9 2ss	3	13	-56.8	-61.2	-61.4		0.1	-41.3	-41.25	0.09
	HE40, M0 to M9 3ss	3	13	-56.8	-61.2	-61.4		0.1	-41.3	-41.25	0.09
	HE40, M0 to M9 1ss	4	13	-60.2	-62.8	-62.0	-62.3	0.1	-42.6	-41.25	1.31
	HE40, M0 to M9 2ss	4	13	-60.2	-62.8	-62.0	-62.3	0.1	-42.6	-41.25	1.31
	HE40, M0 to M9 3ss	4	13	-60.2	-62.8	-62.0	-62.3	0.1	-42.6	-41.25	1.31
	HE40, M0 to M9 4ss	4	13	-60.2	-62.8	-62.0	-62.3	0.1	-42.6	-41.25	1.31
	HE40 Beam Forming, M0 to M9 1ss	2	13	-56.8	-61.2			0.1	-42.3	-41.25	1.07
	HE40 Beam Forming, M0 to M9 2ss	2	13	-56.8	-61.2			0.1	-42.3	-41.25	1.07
	HE40 Beam Forming, M0 to M9 1ss	3	15	-60.2	-62.8	-62.0		0.1	-41.6	-41.25	0.38
	HE40 Beam Forming, M0 to M9 2ss	3	13	-56.8	-61.2	-61.4		0.1	-41.3	-41.25	0.09
	HE40 Beam Forming, M0 to M9 3ss	3	13	-56.8	-61.2	-61.4		0.1	-41.3	-41.25	0.09
	HE40 Beam Forming, M0 to M9 1ss	4	16	-63.8	-63.8	-63.8	-64.7	0.1	-41.9	-41.25	0.61
	HE40 Beam Forming, M0 to M9 2ss	4	13	-60.2	-62.8	-62.0	-62.3	0.1	-42.6	-41.25	1.31
	HE40 Beam Forming, M0 to M9 3ss	4	13	-60.2	-62.8	-62.0	-62.3	0.1	-42.6	-41.25	1.31
	HE40 Beam Forming, M0 to M9 4ss	4	13	-60.2	-62.8	-62.0	-62.3	0.1	-42.6	-41.25	1.31
	HE40 STBC, M0 to M9 2ss	2	13	-56.8	-61.2			0.1	-42.3	-41.25	1.07
	HE40 STBC, M0 to M9 2ss	3	13	-56.8	-61.2	-61.4		0.1	-41.3	-41.25	0.09
	HE40 STBC, M0 to M9 2ss	4	13	-60.2	-62.8	-62.0	-62.3	0.1	-42.6	-41.25	1.31
5320	Non HT20, 6 to 54 Mbps	1	13	-58.2				0.0	-45.2	-41.25	3.91
	Non HT20, 6 to 54 Mbps	2	13	-58.2	-58.4			0.0	-42.2	-41.25	0.99
	Non HT20, 6 to 54 Mbps	3	13	-62.3	-62.7	-62.4		0.0	-44.6	-41.25	3.40
	Non HT20, 6 to 54 Mbps	4	13	-63.8	-62.4	-63.9	-63.8	0.0	-44.4	-41.25	3.11
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-61.3	-61.0			0.0	-45.1	-41.25	3.84
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-67.1	-64.4	-65.0		0.0	-45.5	-41.25	4.29
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-67.9	-67.4	-67.4	-68.3	0.0	-45.7	-41.25	4.42
	HT/VHT20, M0 to M7	1	13	-59.5				0.1	-46.4	-41.25	5.20
	HT/VHT20, M0 to M7	2	13	-59.5	-58.0			0.1	-42.6	-41.25	1.37
	HT/VHT20, M8 to M15	2	13	-59.5	-58.0			0.1	-42.6	-41.25	1.37
	HT/VHT20, M0 to M7	3	13	-60.5	-61.4	-61.4		0.1	-43.3	-41.25	2.01
	HT/VHT20, M8 to M15	3	13	-60.5	-61.4	-61.4		0.1	-43.3	-41.25	2.01
	HT/VHT20, M16 to M23	3	13	-60.5	-61.4	-61.4		0.1	-43.3	-41.25	2.01
	HT/VHT20, M0 to M7	4	13	-63.2	-62.6	-62.3	-62.8	0.1	-43.6	-41.25	2.39



HT/VHT20, M8 to M15	4	13	-63.2	-62.6	-62.3	-62.8	0.1	-43.6	-41.25	2.39
HT/VHT20, M16 to M23	4	13	-63.2	-62.6	-62.3	-62.8	0.1	-43.6	-41.25	2.39
HT/VHT20, M24 to M31	4	13	-63.2	-62.6	-62.3	-62.8	0.1	-43.6	-41.25	2.39
HT/VHT20 Beam Forming, M0 to M7	2	13	-60.5	-61.4			0.1	-44.9	-41.25	3.61
HT/VHT20 Beam Forming, M8 to M15	2	13	-59.5	-58.0			0.1	-42.6	-41.25	1.37
HT/VHT20 Beam Forming, M0 to M7	3	15	-65.9	-65.1	-65.6		0.1	-45.7	-41.25	4.45
HT/VHT20 Beam Forming, M8 to M15	3	13	-63.2	-62.6	-62.3		0.1	-44.9	-41.25	3.61
HT/VHT20 Beam Forming, M16 to M23	3	13	-60.5	-61.4	-61.4		0.1	-43.3	-41.25	2.01
HT/VHT20 Beam Forming, M0 to M7	4	16	-67.9	-67.8	-68.1	-68.3	0.1	-45.9	-41.25	4.70
HT/VHT20 Beam Forming, M8 to M15	4	13	-65.6	-64.7	-64.4	-64.5	0.1	-45.7	-41.25	4.45
HT/VHT20 Beam Forming, M16 to M23	4	13	-63.2	-62.6	-62.3	-62.8	0.1	-43.6	-41.25	2.39
HT/VHT20 Beam Forming, M24 to M31	4	13	-63.2	-62.6	-62.3	-62.8	0.1	-43.6	-41.25	2.39
HT/VHT20 STBC, M0 to M7	2	13	-59.5	-58.0			0.1	-42.6	-41.25	1.37
HT/VHT20 STBC, M0 to M7	3	13	-63.2	-62.6	-62.3		0.1	-44.9	-41.25	3.61
HT/VHT20 STBC, M0 to M7	4	13	-65.6	-64.7	-64.4	-64.5	0.1	-45.7	-41.25	4.45
HE20, M0 to M9 1ss	1	13	-56.9				0.1	-43.8	-41.25	2.58
HE20, M0 to M9 1ss	2	13	-56.9	-58.2			0.1	-41.4	-41.25	0.17
HE20, M0 to M9 2ss	2	13	-56.9	-58.2			0.1	-41.4	-41.25	0.17
HE20, M0 to M9 1ss	3	13	-59.7	-60.7	-60.3		0.1	-42.4	-41.25	1.12
HE20, M0 to M9 2ss	3	13	-59.7	-60.7	-60.3		0.1	-42.4	-41.25	1.12
HE20, M0 to M9 3ss	3	13	-59.7	-60.7	-60.3		0.1	-42.4	-41.25	1.12
HE20, M0 to M9 1ss	4	13	-61.7	-61.3	-61.4	-61.8	0.1	-42.5	-41.25	1.20
HE20, M0 to M9 2ss	4	13	-61.7	-61.3	-61.4	-61.8	0.1	-42.5	-41.25	1.20
HE20, M0 to M9 3ss	4	13	-61.7	-61.3	-61.4	-61.8	0.1	-42.5	-41.25	1.20
HE20, M0 to M9 4ss	4	13	-61.7	-61.3	-61.4	-61.8	0.1	-42.5	-41.25	1.20
HE20 Beam Forming, M0 to M9 1ss	2	13	-59.7	-60.7			0.1	-44.1	-41.25	2.84
HE20 Beam Forming, M0 to M9 2ss	2	13	-56.9	-58.2			0.1	-41.4	-41.25	0.17
HE20 Beam Forming, M0 to M9 1ss	3	15	-65.3	-64.6	-64.4		0.1	-44.9	-41.25	3.66
HE20 Beam Forming, M0 to M9 2ss	3	13	-61.7	-61.3	-61.4		0.1	-43.6	-41.25	2.37
HE20 Beam Forming, M0 to M9 3ss	3	13	-59.7	-60.7	-60.3		0.1	-42.4	-41.25	1.12
HE20 Beam Forming, M0 to M9 1ss	4	16	-67.6	-67.1	-66.5	-67.9	0.1	-45.2	-41.25	3.90
HE20 Beam Forming, M0 to M9 2ss	4	13	-64.6	-63.9	-63.9	-64.0	0.1	-45.0	-41.25	3.75
HE20 Beam Forming, M0 to M9 3ss	4	13	-61.7	-61.3	-61.4	-61.8	0.1	-42.5	-41.25	1.20
HE20 Beam Forming, M0 to M9 4ss	4	13	-61.7	-61.3	-61.4	-61.8	0.1	-42.5	-41.25	1.20
HE20 STBC, M0 to M9 2ss	2	13	-56.9	-58.2			0.1	-41.4	-41.25	0.17
HE20 STBC, M0 to M9 2ss	3	13	-61.7	-61.3	-61.4		0.1	-43.6	-41.25	2.37
HE20 STBC, M0 to M9 2ss	4	13	-64.6	-63.9	-63.9	-64.0	0.1	-45.0	-41.25	3.75



5250	Non HT160, 6 to 54 Mbps	1	13	-56.4				0.0	-43.4	-41.25	2.10
	Non HT160, 6 to 54 Mbps	2	13	-56.4	-62.4			0.0	-42.4	-41.25	1.13
	Non HT160, 6 to 54 Mbps	3	13	-56.4	-62.4	-62.3		0.0	-41.6	-41.25	0.32
	Non HT160, 6 to 54 Mbps	4	13	-59.1	-63.9	-63.2	-61.7	0.0	-42.5	-41.25	1.24
	VHT160, M0 to M9 1ss	1	13	-56.5				0.4	-43.1	-41.25	1.86
	VHT160, M0 to M9 1ss	2	13	-56.5	-62.3			0.4	-42.1	-41.25	0.84
	VHT160, M0 to M9 2ss	2	13	-56.5	-62.3			0.4	-42.1	-41.25	0.84
	VHT160, M0 to M9 1ss	3	13	-56.5	-62.3	-63.4		0.4	-41.4	-41.25	0.19
	VHT160, M0 to M9 2ss	3	13	-56.5	-62.3	-63.4		0.4	-41.4	-41.25	0.19
	VHT160, M0 to M9 3ss	3	13	-56.5	-62.3	-63.4		0.4	-41.4	-41.25	0.19
	VHT160, M0 to M9 1ss	4	13	-60.8	-65.5	-64.7	-65.1	0.4	-44.1	-41.25	2.90
	VHT160, M0 to M9 2ss	4	13	-60.8	-65.5	-64.7	-65.1	0.4	-44.1	-41.25	2.90
	VHT160, M0 to M9 3ss	4	13	-60.8	-65.5	-64.7	-65.1	0.4	-44.1	-41.25	2.90
	VHT160, M0 to M9 4ss	4	13	-60.8	-65.5	-64.7	-65.1	0.4	-44.1	-41.25	2.90
	VHT160 Beam Forming, M0 to M9 1ss	2	13	-56.5	-62.3			0.4	-42.1	-41.25	0.84
	VHT160 Beam Forming, M0 to M9 2ss	2	13	-56.5	-62.3			0.4	-42.1	-41.25	0.84
	VHT160 Beam Forming, M0 to M9 1ss	3	15	-60.8	-65.5	-64.7		0.4	-43.0	-41.25	1.74
	VHT160 Beam Forming, M0 to M9 2ss	3	13	-56.5	-62.3	-63.4		0.4	-41.4	-41.25	0.19
	VHT160 Beam Forming, M0 to M9 3ss	3	13	-56.5	-62.3	-63.4		0.4	-41.4	-41.25	0.19
	VHT160 Beam Forming, M0 to M9 1ss	4	16	-62.6	-66.9	-64.5	-65.5	0.4	-42.2	-41.25	0.93
	VHT160 Beam Forming, M0 to M9 2ss	4	13	-60.8	-65.5	-64.7	-65.1	0.4	-44.1	-41.25	2.90
	VHT160 Beam Forming, M0 to M9 3ss	4	13	-60.8	-65.5	-64.7	-65.1	0.4	-44.1	-41.25	2.90
	VHT160 Beam Forming, M0 to M9 4ss	4	13	-60.8	-65.5	-64.7	-65.1	0.4	-44.1	-41.25	2.90
	VHT160 STBC, M0 to M9 1ss	2	13	-56.5	-62.3			0.4	-42.1	-41.25	0.84
	VHT160 STBC, M0 to M9 1ss	3	13	-56.5	-62.3	-63.4		0.4	-41.4	-41.25	0.19
	VHT160 STBC, M0 to M9 1ss	4	13	-60.8	-65.5	-64.7	-65.1	0.4	-44.1	-41.25	2.90
	HE160, M0 to M9 1ss	1	13	-55.9				0.4	-42.5	-41.25	1.22
	HE160, M0 to M9 1ss	2	13	-55.9	-63.1			0.4	-41.7	-41.25	0.46
	HE160, M0 to M9 2ss	2	13	-55.9	-63.1			0.4	-41.7	-41.25	0.46
	HE160, M0 to M9 1ss	3	13	-59.2	-63.8	-63.3		0.4	-43.4	-41.25	2.12
	HE160, M0 to M9 2ss	3	13	-59.2	-63.8	-63.3		0.4	-43.4	-41.25	2.12
	HE160, M0 to M9 3ss	3	13	-59.2	-63.8	-63.3		0.4	-43.4	-41.25	2.12
	HE160, M0 to M9 1ss	4	13	-59.2	-63.8	-63.3	-63.2	0.4	-42.5	-41.25	1.22
	HE160, M0 to M9 2ss	4	13	-59.2	-63.8	-63.3	-63.2	0.4	-42.5	-41.25	1.22
	HE160, M0 to M9 3ss	4	13	-59.2	-63.8	-63.3	-63.2	0.4	-42.5	-41.25	1.22
	HE160, M0 to M9 4ss	4	13	-59.2	-63.8	-63.3	-63.2	0.4	-42.5	-41.25	1.22
	HE160 Beam Forming, M0 to M9 1ss	2	13	-55.9	-63.1			0.4	-41.7	-41.25	0.46
	HE160 Beam Forming, M0 to M9 2ss	2	13	-55.9	-63.1			0.4	-41.7	-41.25	0.46
	HE160 Beam Forming, M0 to M9 1ss	3	15	-59.2	-63.8	-63.3		0.4	-41.4	-41.25	0.12
	HE160 Beam Forming, M0 to M9 2ss	3	13	-59.2	-63.8	-63.3		0.4	-43.4	-41.25	2.12
	HE160 Beam Forming, M0 to M9 3ss	3	13	-59.2	-63.8	-63.3		0.4	-43.4	-41.25	2.12
	HE160 Beam Forming, M0 to M9 1ss	4	16	-64.2	-66.8	-65.8	-65.1	0.4	-42.9	-41.25	1.67



HE160 Beam Forming, M0 to M9 2ss	4	13	-59.2	-63.8	-63.3	-63.2	0.4	-42.5	-41.25	1.22
HE160 Beam Forming, M0 to M9 3ss	4	13	-59.2	-63.8	-63.3	-63.2	0.4	-42.5	-41.25	1.22
HE160 Beam Forming, M0 to M9 4ss	4	13	-59.2	-63.8	-63.3	-63.2	0.4	-42.5	-41.25	1.22
HE160 STBC, M0 to M9 1ss	2	13	-55.9	-63.1			0.4	-41.7	-41.25	0.46
HE160 STBC, M0 to M9 1ss	3	13	-59.2	-63.8	-63.3		0.4	-43.4	-41.25	2.12
HE160 STBC, M0 to M9 1ss	4	13	-59.2	-63.8	-63.3	-63.2	0.4	-42.5	-41.25	1.22

Conducted Bandedge Average, 5290 MHz, Non HT80, 6 to 54 Mbps**Antenna A****Antenna B**



Conducted Bandedge Peak Table

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5290	Non HT80, 6 to 54 Mbps	1	13	-39.0				-25.9	-21.25	4.70
	Non HT80, 6 to 54 Mbps	2	13	-39.0	-45.3			-25.0	-21.25	3.78
	Non HT80, 6 to 54 Mbps	3	13	-42.7	-50.4	-50.1		-28.3	-21.25	7.09
	Non HT80, 6 to 54 Mbps	4	13	-43.5	-46.9	-49.6	-50.9	-27.7	-21.25	6.45
	VHT80, M0 to M9 1ss	1	13	-39.3				-26.1	-21.25	4.83
	VHT80, M0 to M9 1ss	2	13	-43.1	-50.3			-29.1	-21.25	7.88
	VHT80, M0 to M9 2ss	2	13	-43.1	-50.3			-29.1	-21.25	7.88
	VHT80, M0 to M9 1ss	3	13	-43.1	-50.3	-49.2		-28.3	-21.25	7.06
	VHT80, M0 to M9 2ss	3	13	-43.1	-50.3	-49.2		-28.3	-21.25	7.06
	VHT80, M0 to M9 3ss	3	13	-43.1	-50.3	-49.2		-28.3	-21.25	7.06
	VHT80, M0 to M9 1ss	4	13	-45.3	-52.2	-52.3	-52.3	-30.0	-21.25	8.78
	VHT80, M0 to M9 2ss	4	13	-45.3	-52.2	-52.3	-52.3	-30.0	-21.25	8.78
	VHT80, M0 to M9 3ss	4	13	-45.3	-52.2	-52.3	-52.3	-30.0	-21.25	8.78
	VHT80, M0 to M9 4ss	4	13	-45.3	-52.2	-52.3	-52.3	-30.0	-21.25	8.78
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-43.1	-50.3			-29.1	-21.25	7.88
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-43.1	-50.3			-29.1	-21.25	7.88
	VHT80 Beam Forming, M0 to M9 1ss	3	15	-47.6	-52.9	-52.3		-30.3	-21.25	9.00
	VHT80 Beam Forming, M0 to M9 2ss	3	13	-43.1	-50.3	-49.2		-28.3	-21.25	7.06
	VHT80 Beam Forming, M0 to M9 3ss	3	13	-43.1	-50.3	-49.2		-28.3	-21.25	7.06
	VHT80 Beam Forming, M0 to M9 1ss	4	16	-50.8	-55.2	-52.6	-53.2	-30.4	-21.25	9.19
	VHT80 Beam Forming, M0 to M9 2ss	4	13	-45.3	-52.2	-52.3	-52.3	-30.0	-21.25	8.78
	VHT80 Beam Forming, M0 to M9 3ss	4	13	-45.3	-52.2	-52.3	-52.3	-30.0	-21.25	8.78
	VHT80 Beam Forming, M0 to M9 4ss	4	13	-45.3	-52.2	-52.3	-52.3	-30.0	-21.25	8.78
	VHT80 STBC, M0 to M9 1ss	2	13	-43.1	-50.3			-29.1	-21.25	7.88
	VHT80 STBC, M0 to M9 1ss	3	13	-43.1	-50.3	-49.2		-28.3	-21.25	7.06
	VHT80 STBC, M0 to M9 1ss	4	13	-45.3	-52.2	-52.3	-52.3	-30.0	-21.25	8.78
	HE80, M0 to M9 1ss	1	13	-45.6				-32.3	-21.25	11.09



	HE80, M0 to M9 1ss	2	13	-45.6	-50.7			-31.2	-21.25	9.92
	HE80, M0 to M9 2ss	2	13	-45.6	-50.7			-31.2	-21.25	9.92
	HE80, M0 to M9 1ss	3	13	-45.1	-52.0	-52.1		-30.4	-21.25	9.12
	HE80, M0 to M9 2ss	3	13	-45.1	-52.0	-52.1		-30.4	-21.25	9.12
	HE80, M0 to M9 3ss	3	13	-45.1	-52.0	-52.1		-30.4	-21.25	9.12
	HE80, M0 to M9 1ss	4	13	-45.1	-52.0	-52.1	-51.3	-29.7	-21.25	8.43
	HE80, M0 to M9 2ss	4	13	-45.1	-52.0	-52.1	-51.3	-29.7	-21.25	8.43
	HE80, M0 to M9 3ss	4	13	-45.1	-52.0	-52.1	-51.3	-29.7	-21.25	8.43
	HE80, M0 to M9 4ss	4	13	-45.1	-52.0	-52.1	-51.3	-29.7	-21.25	8.43
	HE80 Beam Forming, M0 to M9 1ss	2	13	-45.6	-50.7			-31.2	-21.25	9.92
	HE80 Beam Forming, M0 to M9 2ss	2	13	-45.6	-50.7			-31.2	-21.25	9.92
	HE80 Beam Forming, M0 to M9 1ss	3	15	-50.1	-52.7	-51.5		-31.3	-21.25	10.02
	HE80 Beam Forming, M0 to M9 2ss	3	13	-45.1	-52.0	-52.1		-30.4	-21.25	9.12
	HE80 Beam Forming, M0 to M9 3ss	3	13	-45.1	-52.0	-52.1		-30.4	-21.25	9.12
	HE80 Beam Forming, M0 to M9 1ss	4	16	-51.6	-49.5	-53.0	-51.1	-28.8	-21.25	7.59
	HE80 Beam Forming, M0 to M9 2ss	4	13	-45.1	-52.0	-52.1	-51.3	-29.7	-21.25	8.43
	HE80 Beam Forming, M0 to M9 3ss	4	13	-45.1	-52.0	-52.1	-51.3	-29.7	-21.25	8.43
	HE80 Beam Forming, M0 to M9 4ss	4	13	-45.1	-52.0	-52.1	-51.3	-29.7	-21.25	8.43
	HE80 STBC, M0 to M9 1ss	2	13	-45.6	-50.7			-31.2	-21.25	9.92
	HE80 STBC, M0 to M9 1ss	3	13	-45.1	-52.0	-52.1		-30.4	-21.25	9.12
	HE80 STBC, M0 to M9 1ss	4	13	-45.1	-52.0	-52.1	-51.3	-29.7	-21.25	8.43
5310	Non HT40, 6 to 54 Mbps	1	13	-39.7				-26.7	-21.25	5.41
	Non HT40, 6 to 54 Mbps	2	13	-39.7	-48.6			-26.1	-21.25	4.88
	Non HT40, 6 to 54 Mbps	3	13	-42.6	-48.6	-47.3		-27.5	-21.25	6.29
	Non HT40, 6 to 54 Mbps	4	13	-42.6	-48.6	-47.3	-49.2	-27.0	-21.25	5.73
	HT/VHT40, M0 to M7	1	13	-44.2				-31.1	-21.25	9.85
	HT/VHT40, M0 to M7	2	13	-44.2	-49.2			-29.9	-21.25	8.65
	HT/VHT40, M8 to M15	2	13	-44.2	-49.2			-29.9	-21.25	8.65
	HT/VHT40, M0 to M7	3	13	-45.7	-51.2	-52.5		-30.9	-21.25	9.61
	HT/VHT40, M8 to M15	3	13	-45.7	-51.2	-52.5		-30.9	-21.25	9.61
	HT/VHT40, M16 to M23	3	13	-45.7	-51.2	-52.5		-30.9	-21.25	9.61
	HT/VHT40, M0 to M7	4	13	-45.7	-51.2	-52.5	-50.2	-29.9	-21.25	8.69
	HT/VHT40, M8 to M15	4	13	-45.7	-51.2	-52.5	-50.2	-29.9	-21.25	8.69
	HT/VHT40, M16 to M23	4	13	-45.7	-51.2	-52.5	-50.2	-29.9	-21.25	8.69
	HT/VHT40, M24 to M31	4	13	-45.7	-51.2	-52.5	-50.2	-29.9	-21.25	8.69
	HT/VHT40 Beam Forming, M0 to M7	2	13	-44.2	-49.2			-29.9	-21.25	8.65
	HT/VHT40 Beam Forming, M8 to M15	2	13	-44.2	-49.2			-29.9	-21.25	8.65
	HT/VHT40 Beam Forming, M0 to M7	3	15	-48.4	-51.5	-51.2		-30.3	-21.25	9.01
	HT/VHT40 Beam Forming, M8 to M15	3	13	-45.7	-51.2	-52.5		-30.9	-21.25	9.61
	HT/VHT40 Beam Forming, M16 to M23	3	13	-45.7	-51.2	-52.5		-30.9	-21.25	9.61
	HT/VHT40 Beam Forming, M0 to M7	4	16	-56.2	-54.4	-54.9	-54.1	-32.7	-21.25	11.46



	HT/VHT40 Beam Forming, M8 to M15	4	13	-45.7	-51.2	-52.5	-50.2	-29.9	-21.25	8.69
	HT/VHT40 Beam Forming, M16 to M23	4	13	-45.7	-51.2	-52.5	-50.2	-29.9	-21.25	8.69
	HT/VHT40 Beam Forming, M24 to M31	4	13	-45.7	-51.2	-52.5	-50.2	-29.9	-21.25	8.69
	HT/VHT40 STBC, M0 to M7	2	13	-44.2	-49.2			-29.9	-21.25	8.65
	HT/VHT40 STBC, M0 to M7	3	13	-45.7	-51.2	-52.5		-30.9	-21.25	9.61
	HT/VHT40 STBC, M0 to M7	4	13	-45.7	-51.2	-52.5	-50.2	-29.9	-21.25	8.69
	HE40, M0 to M9 1ss	1	13	-39.4				-26.3	-21.25	5.02
	HE40, M0 to M9 1ss	2	13	-43.6	-50.9			-29.7	-21.25	8.48
	HE40, M0 to M9 2ss	2	13	-43.6	-50.9			-29.7	-21.25	8.48
	HE40, M0 to M9 1ss	3	13	-43.6	-50.9	-49.2		-28.8	-21.25	7.57
	HE40, M0 to M9 2ss	3	13	-43.6	-50.9	-49.2		-28.8	-21.25	7.57
	HE40, M0 to M9 3ss	3	13	-43.6	-50.9	-49.2		-28.8	-21.25	7.57
	HE40, M0 to M9 1ss	4	13	-47.9	-50.2	-51.2	-52.8	-31.0	-21.25	9.75
	HE40, M0 to M9 2ss	4	13	-47.9	-50.2	-51.2	-52.8	-31.0	-21.25	9.75
	HE40, M0 to M9 3ss	4	13	-47.9	-50.2	-51.2	-52.8	-31.0	-21.25	9.75
	HE40, M0 to M9 4ss	4	13	-47.9	-50.2	-51.2	-52.8	-31.0	-21.25	9.75
	HE40 Beam Forming, M0 to M9 1ss	2	13	-43.6	-50.9			-29.7	-21.25	8.48
	HE40 Beam Forming, M0 to M9 2ss	2	13	-43.6	-50.9			-29.7	-21.25	8.48
	HE40 Beam Forming, M0 to M9 1ss	3	15	-47.9	-50.2	-51.2		-29.6	-21.25	8.39
	HE40 Beam Forming, M0 to M9 2ss	3	13	-43.6	-50.9	-49.2		-28.8	-21.25	7.57
	HE40 Beam Forming, M0 to M9 3ss	3	13	-43.6	-50.9	-49.2		-28.8	-21.25	7.57
	HE40 Beam Forming, M0 to M9 1ss	4	16	-54.4	-52.1	-52.2	-55.3	-31.1	-21.25	9.88
	HE40 Beam Forming, M0 to M9 2ss	4	13	-47.9	-50.2	-51.2	-52.8	-31.0	-21.25	9.75
	HE40 Beam Forming, M0 to M9 3ss	4	13	-47.9	-50.2	-51.2	-52.8	-31.0	-21.25	9.75
	HE40 Beam Forming, M0 to M9 4ss	4	13	-47.9	-50.2	-51.2	-52.8	-31.0	-21.25	9.75
	HE40 STBC, M0 to M9 2ss	2	13	-43.6	-50.9			-29.7	-21.25	8.48
	HE40 STBC, M0 to M9 2ss	3	13	-43.6	-50.9	-49.2		-28.8	-21.25	7.57
	HE40 STBC, M0 to M9 2ss	4	13	-47.9	-50.2	-51.2	-52.8	-31.0	-21.25	9.75
5320	Non HT20, 6 to 54 Mbps	1	13	-42.2				-29.2	-21.25	7.91
	Non HT20, 6 to 54 Mbps	2	13	-42.2	-45.7			-27.6	-21.25	6.30
	Non HT20, 6 to 54 Mbps	3	13	-49.3	-50.5	-50.5		-32.2	-21.25	11.00
	Non HT20, 6 to 54 Mbps	4	13	-52.6	-50.9	-52.0	-51.8	-32.7	-21.25	11.47
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-47.9	-49.0			-32.4	-21.25	11.11
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-54.4	-53.8	-53.3		-34.0	-21.25	12.75
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-57.0	-55.6	-56.1	-55.7	-34.0	-21.25	12.75
	HT/VHT20, M0 to M7	1	13	-43.2				-30.1	-21.25	8.90
	HT/VHT20, M0 to M7	2	13	-43.2	-43.3			-27.2	-21.25	5.94
	HT/VHT20, M8 to M15	2	13	-43.2	-43.3			-27.2	-21.25	5.94
	HT/VHT20, M0 to M7	3	13	-45.8	-49.2	-50.4		-30.2	-21.25	8.94
	HT/VHT20, M8 to M15	3	13	-45.8	-49.2	-50.4		-30.2	-21.25	8.94
	HT/VHT20, M16 to M23	3	13	-45.8	-49.2	-50.4		-30.2	-21.25	8.94



	HT/VHT20, M0 to M7	4	13	-49.0	-50.2	-50.7	-50.8	-31.0	-21.25	9.79
	HT/VHT20, M8 to M15	4	13	-49.0	-50.2	-50.7	-50.8	-31.0	-21.25	9.79
	HT/VHT20, M16 to M23	4	13	-49.0	-50.2	-50.7	-50.8	-31.0	-21.25	9.79
	HT/VHT20, M24 to M31	4	13	-49.0	-50.2	-50.7	-50.8	-31.0	-21.25	9.79
	HT/VHT20 Beam Forming, M0 to M7	2	13	-45.8	-49.2			-31.1	-21.25	9.86
	HT/VHT20 Beam Forming, M8 to M15	2	13	-43.2	-43.3			-27.2	-21.25	5.94
	HT/VHT20 Beam Forming, M0 to M7	3	15	-54.1	-52.6	-53.3		-33.5	-21.25	12.22
	HT/VHT20 Beam Forming, M8 to M15	3	13	-49.0	-50.2	-50.7		-32.1	-21.25	10.83
	HT/VHT20 Beam Forming, M16 to M23	3	13	-45.8	-49.2	-50.4		-30.2	-21.25	8.94
	HT/VHT20 Beam Forming, M0 to M7	4	16	-56.0	-56.6	-56.0	-57.3	-34.4	-21.25	13.12
	HT/VHT20 Beam Forming, M8 to M15	4	13	-53.6	-51.4	-51.3	-52.8	-33.1	-21.25	11.85
	HT/VHT20 Beam Forming, M16 to M23	4	13	-49.0	-50.2	-50.7	-50.8	-31.0	-21.25	9.79
	HT/VHT20 Beam Forming, M24 to M31	4	13	-49.0	-50.2	-50.7	-50.8	-31.0	-21.25	9.79
	HT/VHT20 STBC, M0 to M7	2	13	-43.2	-43.3			-27.2	-21.25	5.94
	HT/VHT20 STBC, M0 to M7	3	13	-49.0	-50.2	-50.7		-32.1	-21.25	10.83
	HT/VHT20 STBC, M0 to M7	4	13	-53.6	-51.4	-51.3	-52.8	-33.1	-21.25	11.85
	HE20, M0 to M9 1ss	1	13	-42.3				-29.2	-21.25	7.98
	HE20, M0 to M9 1ss	2	13	-42.3	-42.4			-26.3	-21.25	5.02
	HE20, M0 to M9 2ss	2	13	-42.3	-42.4			-26.3	-21.25	5.02
	HE20, M0 to M9 1ss	3	13	-45.0	-49.8	-49.2		-29.6	-21.25	8.35
	HE20, M0 to M9 2ss	3	13	-45.0	-49.8	-49.2		-29.6	-21.25	8.35
	HE20, M0 to M9 3ss	3	13	-45.0	-49.8	-49.2		-29.6	-21.25	8.35
	HE20, M0 to M9 1ss	4	13	-47.3	-51.4	-50.4	-50.5	-30.5	-21.25	9.26
	HE20, M0 to M9 2ss	4	13	-47.3	-51.4	-50.4	-50.5	-30.5	-21.25	9.26
	HE20, M0 to M9 3ss	4	13	-47.3	-51.4	-50.4	-50.5	-30.5	-21.25	9.26
	HE20, M0 to M9 4ss	4	13	-47.3	-51.4	-50.4	-50.5	-30.5	-21.25	9.26
	HE20 Beam Forming, M0 to M9 1ss	2	13	-45.0	-49.8			-30.7	-21.25	9.44
	HE20 Beam Forming, M0 to M9 2ss	2	13	-42.3	-42.4			-26.3	-21.25	5.02
	HE20 Beam Forming, M0 to M9 1ss	3	15	-54.2	-53.0	-51.6		-33.0	-21.25	11.71
	HE20 Beam Forming, M0 to M9 2ss	3	13	-47.3	-51.4	-50.4		-31.5	-21.25	10.24
	HE20 Beam Forming, M0 to M9 3ss	3	13	-45.0	-49.8	-49.2		-29.6	-21.25	8.35
	HE20 Beam Forming, M0 to M9 1ss	4	16	-56.7	-56.0	-54.3	-55.5	-33.4	-21.25	12.19
	HE20 Beam Forming, M0 to M9 2ss	4	13	-54.3	-51.7	-51.8	-52.5	-33.4	-21.25	12.12
	HE20 Beam Forming, M0 to M9 3ss	4	13	-47.3	-51.4	-50.4	-50.5	-30.5	-21.25	9.26
	HE20 Beam Forming, M0 to M9 4ss	4	13	-47.3	-51.4	-50.4	-50.5	-30.5	-21.25	9.26
	HE20 STBC, M0 to M9 2ss	2	13	-42.3	-42.4			-26.3	-21.25	5.02
	HE20 STBC, M0 to M9 2ss	3	13	-47.3	-51.4	-50.4		-31.5	-21.25	10.24
	HE20 STBC, M0 to M9 2ss	4	13	-54.3	-51.7	-51.8	-52.5	-33.4	-21.25	12.12
5250	Non HT160, 6 to 54 Mbps	1	13	-40.4				-27.4	-21.25	6.10
	Non HT160, 6 to 54 Mbps	2	13	-40.4	-50.0			-26.9	-21.25	5.65
	Non HT160, 6 to 54 Mbps	3	13	-40.4	-50.0	-51.4		-26.6	-21.25	5.35



Non HT160, 6 to 54 Mbps	4	13	-44.0	-52.1	-52.6	-50.3	-29.1	-21.25	7.86
VHT160, M0 to M9 1ss	1	13	-36.1				-22.7	-21.25	1.46
VHT160, M0 to M9 1ss	2	13	-36.1	-44.5			-22.1	-21.25	0.87
VHT160, M0 to M9 2ss	2	13	-36.1	-44.5			-22.1	-21.25	0.87
VHT160, M0 to M9 1ss	3	13	-36.1	-44.5	-44.6		-21.6	-21.25	0.37
VHT160, M0 to M9 2ss	3	13	-36.1	-44.5	-44.6		-21.6	-21.25	0.37
VHT160, M0 to M9 3ss	3	13	-36.1	-44.5	-44.6		-21.6	-21.25	0.37
VHT160, M0 to M9 1ss	4	13	-40.1	-44.5	-45.4	-47.5	-24.1	-21.25	2.81
VHT160, M0 to M9 2ss	4	13	-40.1	-44.5	-45.4	-47.5	-24.1	-21.25	2.81
VHT160, M0 to M9 3ss	4	13	-40.1	-44.5	-45.4	-47.5	-24.1	-21.25	2.81
VHT160, M0 to M9 4ss	4	13	-40.1	-44.5	-45.4	-47.5	-24.1	-21.25	2.81
VHT160 Beam Forming, M0 to M9 1ss	2	13	-36.1	-44.5			-22.1	-21.25	0.87
VHT160 Beam Forming, M0 to M9 2ss	2	13	-36.1	-44.5			-22.1	-21.25	0.87
VHT160 Beam Forming, M0 to M9 1ss	3	15	-40.1	-44.5	-45.4		-22.5	-21.25	1.26
VHT160 Beam Forming, M0 to M9 2ss	3	13	-36.1	-44.5	-44.6		-21.6	-21.25	0.37
VHT160 Beam Forming, M0 to M9 3ss	3	13	-36.1	-44.5	-44.6		-21.6	-21.25	0.37
VHT160 Beam Forming, M0 to M9 1ss	4	16	-42.1	-45.1	-44.4	-47.0	-21.9	-21.25	0.63
VHT160 Beam Forming, M0 to M9 2ss	4	13	-40.1	-44.5	-45.4	-47.5	-24.1	-21.25	2.81
VHT160 Beam Forming, M0 to M9 3ss	4	13	-40.1	-44.5	-45.4	-47.5	-24.1	-21.25	2.81
VHT160 Beam Forming, M0 to M9 4ss	4	13	-40.1	-44.5	-45.4	-47.5	-24.1	-21.25	2.81
VHT160 STBC, M0 to M9 1ss	2	13	-36.1	-44.5			-22.1	-21.25	0.87
VHT160 STBC, M0 to M9 1ss	3	13	-36.1	-44.5	-44.6		-21.6	-21.25	0.37
VHT160 STBC, M0 to M9 1ss	4	13	-40.1	-44.5	-45.4	-47.5	-24.1	-21.25	2.81
HE160, M0 to M9 1ss	1	13	-42.0				-28.6	-21.25	7.32
HE160, M0 to M9 1ss	2	13	-42.0	-50.4			-28.0	-21.25	6.73
HE160, M0 to M9 2ss	2	13	-42.0	-50.4			-28.0	-21.25	6.73
HE160, M0 to M9 1ss	3	13	-45.0	-51.9	-51.5		-30.0	-21.25	8.77
HE160, M0 to M9 2ss	3	13	-45.0	-51.9	-51.5		-30.0	-21.25	8.77
HE160, M0 to M9 3ss	3	13	-45.0	-51.9	-51.5		-30.0	-21.25	8.77
HE160, M0 to M9 1ss	4	13	-45.0	-51.9	-51.5	-50.1	-29.2	-21.25	7.92
HE160, M0 to M9 2ss	4	13	-45.0	-51.9	-51.5	-50.1	-29.2	-21.25	7.92
HE160, M0 to M9 3ss	4	13	-45.0	-51.9	-51.5	-50.1	-29.2	-21.25	7.92
HE160, M0 to M9 4ss	4	13	-45.0	-51.9	-51.5	-50.1	-29.2	-21.25	7.92
HE160 Beam Forming, M0 to M9 1ss	2	13	-42.0	-50.4			-28.0	-21.25	6.73
HE160 Beam Forming, M0 to M9 2ss	2	13	-42.0	-50.4			-28.0	-21.25	6.73
HE160 Beam Forming, M0 to M9 1ss	3	15	-45.0	-51.9	-51.5		-28.0	-21.25	6.77
HE160 Beam Forming, M0 to M9 2ss	3	13	-45.0	-51.9	-51.5		-30.0	-21.25	8.77
HE160 Beam Forming, M0 to M9 3ss	3	13	-45.0	-51.9	-51.5		-30.0	-21.25	8.77
HE160 Beam Forming, M0 to M9 1ss	4	16	-50.8	-53.9	-52.7	-52.5	-29.9	-21.25	8.63
HE160 Beam Forming, M0 to M9 2ss	4	13	-45.0	-51.9	-51.5	-50.1	-29.2	-21.25	7.92
HE160 Beam Forming, M0 to M9 3ss	4	13	-45.0	-51.9	-51.5	-50.1	-29.2	-21.25	7.92
HE160 Beam Forming, M0 to M9 4ss	4	13	-45.0	-51.9	-51.5	-50.1	-29.2	-21.25	7.92



	HE160 STBC, M0 to M9 1ss	2	13	-42.0	-50.4			-28.0	-21.25	6.73
	HE160 STBC, M0 to M9 1ss	3	13	-45.0	-51.9	-51.5		-30.0	-21.25	8.77
	HE160 STBC, M0 to M9 1ss	4	13	-45.0	-51.9	-51.5	-50.1	-29.2	-21.25	7.92

Conducted Bandedge Peak, 5250 MHz, VHT160, M0 to M9 1ss**Antenna A****Antenna B****Antenna C**



Appendix B: Radiated & AC Conducted Emissions Test Results

Testing done by outside laboratory.



Appendix C: List of Test Equipment Used to perform the test

Test Equipment used for Conducted Emissions					
Equip#	Manufacturer/ Model	Description	Last Cal	Next Cal	Test Item
57477	Cisco	Automation Test Insertion Loss	NA	NA	A1-A7
55108	Keysight N9030A-550	PXA Signal Analyzer, 3Hz to 50GHz	23 Oct 2018	23 Oct 2019	A1-A7
55093	NI PXI-1042	CHASSIS, PXI	NA	NA	A1-A7
57238	NI PXI-8115	Embedded Controller	NA	NA	A1-A7
57247	NI PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	NA	NA	A1-A7
57248	NI PXI-2799	Switch 1x1	NA	NA	A1-A7
56092	NI PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	NA	NA	A1-A7
7329	Omega CT485B	Chart recorder	18 Feb 2019	18 Feb 2020	A1-A7
56328	Pasternack PE5019-1	Torque wrench	14 Feb 2019	14 Feb 2020	A1-A7
56329	Pasternack PE5019-1	Torque wrench	28 Feb 2019	28 Feb 2020	A1-A7
56330	Pasternack PE5019-1	Torque wrench	28 Feb 2019	28 Feb 2020	A1-A7



Appendix D: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz (1×10^3)
EN	European Norm	MHz	MegaHertz (1×10^6)
IEC	International Electro technical Commission	GHz	Gigahertz (1×10^9)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1×10^3)
L1	Line 1	μ V	Microvolt (1×10^{-6})
L2	Line2	A	Amp
L3	Line 3	μ A	Micro Amp (1×10^{-6})
DC	Direct Current	mS	Milli Second (1×10^{-3})
RAW	Uncorrected measurement value, as indicated by the measuring device	μ S	Micro Second (1×10^{-6})
RF	Radio Frequency	μ S	Micro Second (1×10^{-6})
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current



Appendix E: Photographs of Test Setups

Please refer to attachment



Appendix F: Software Used to Perform Testing

Cisco Internal LabView Radio Test Automation Software rev57

Appendix G: Test Procedures

Measurements were made in accordance with

- KDB 789033 - D02 General UNII Test Procedures New Rules v02r01
- KDB 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

FCC 5GHz Test Procedures	EDCS # 1445048
FCC 5GHz RSE Test Procedures	EDCS # 1511600

Appendix H: Scope of Accreditation (A2LA certificate number 1178-01)

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>

Appendix I: Test Assessment Plan

Target Power Tables EDCS# 16415403

End