



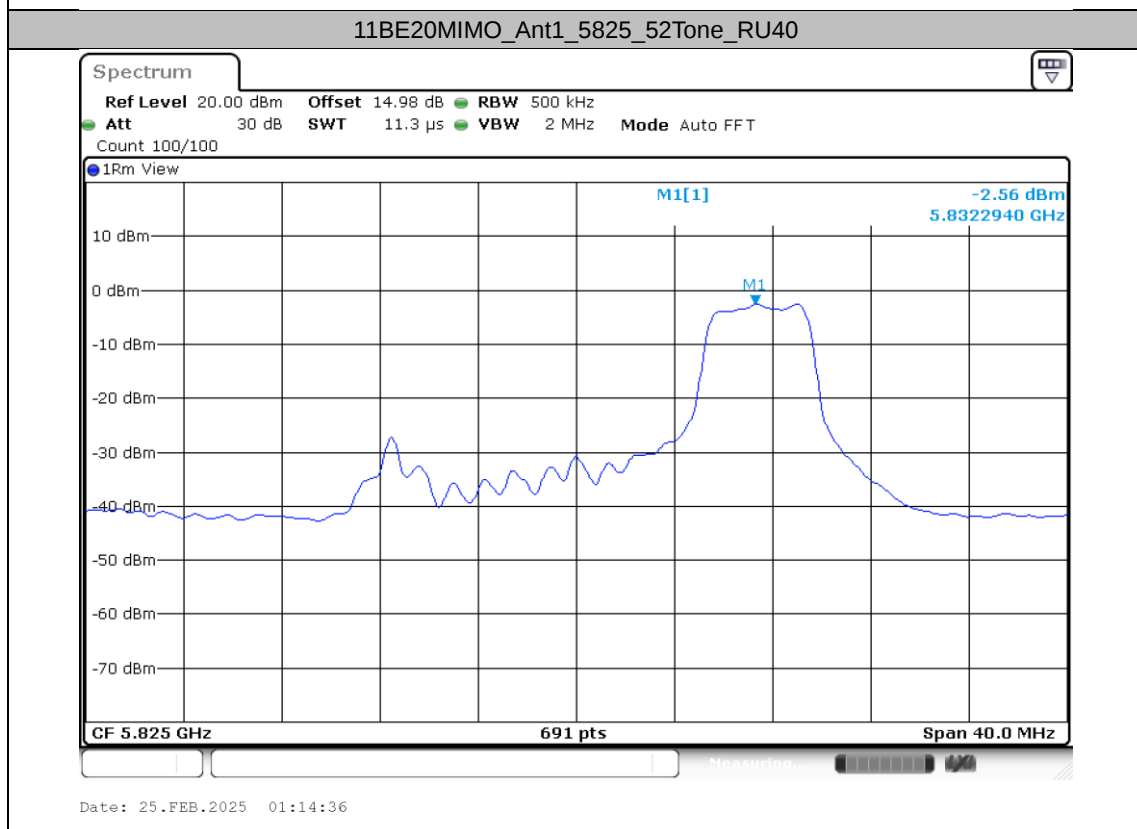
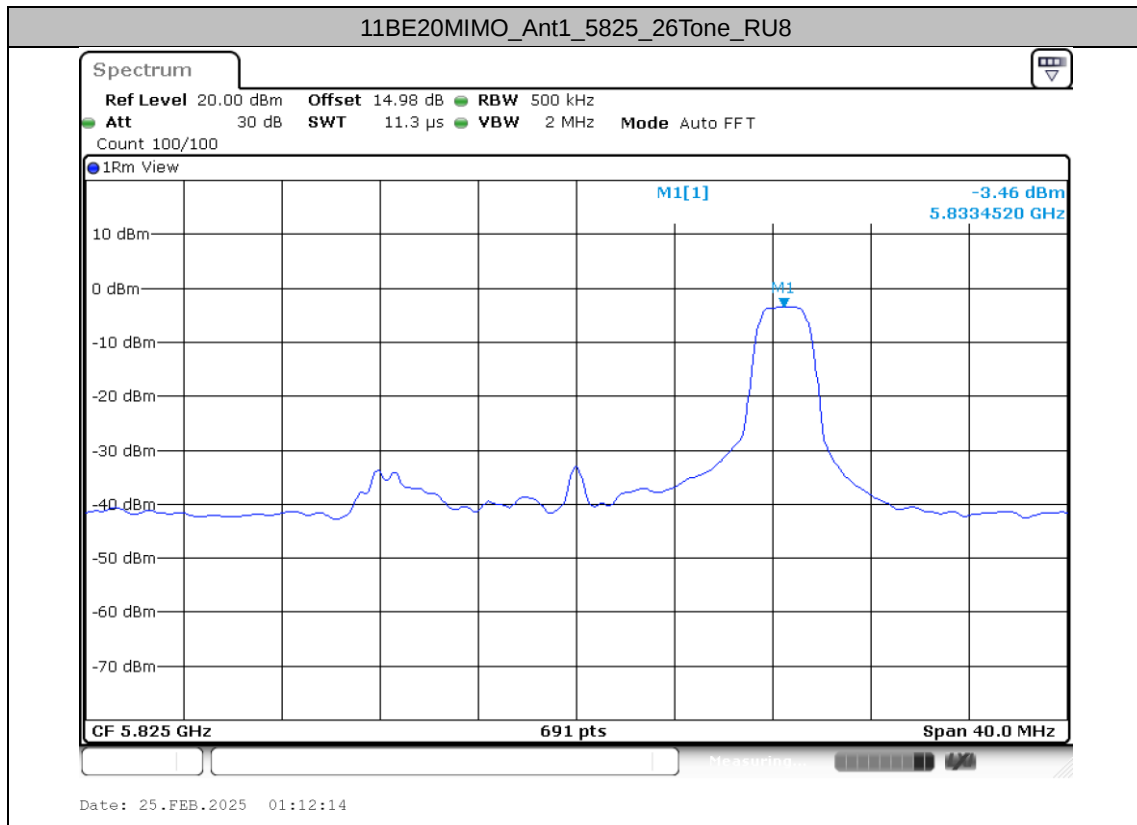


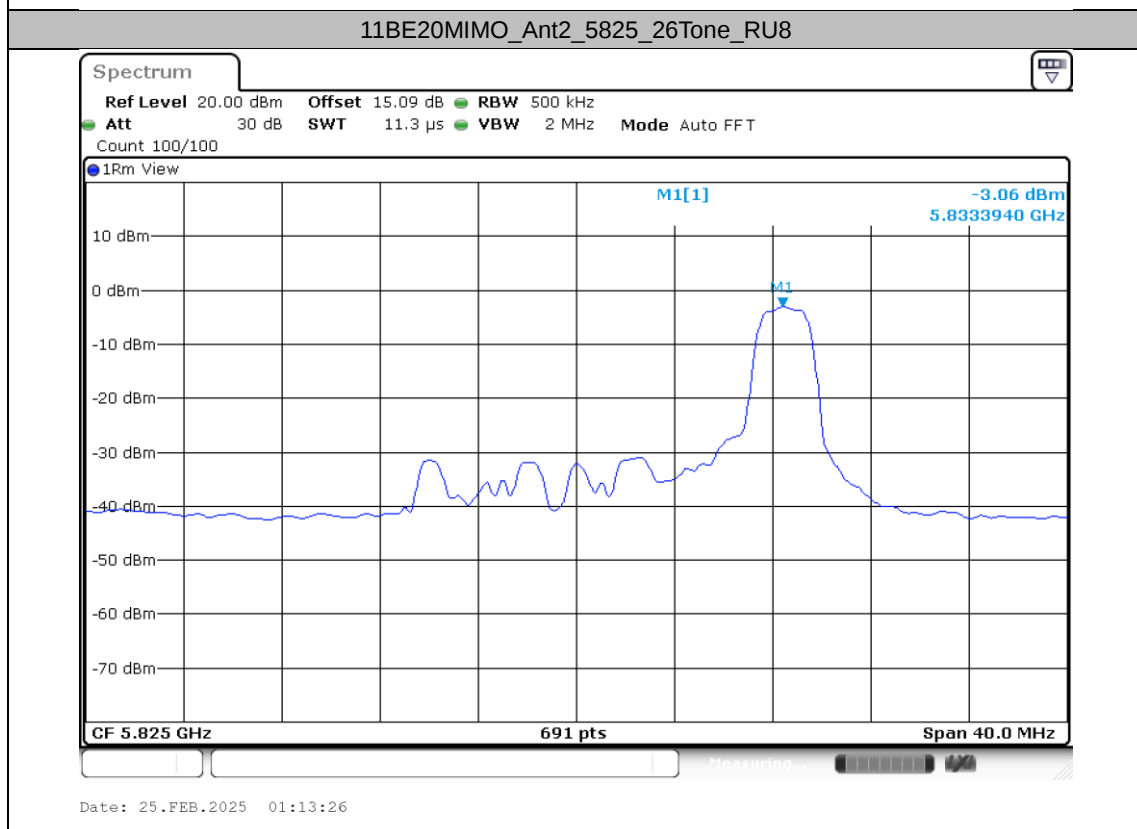


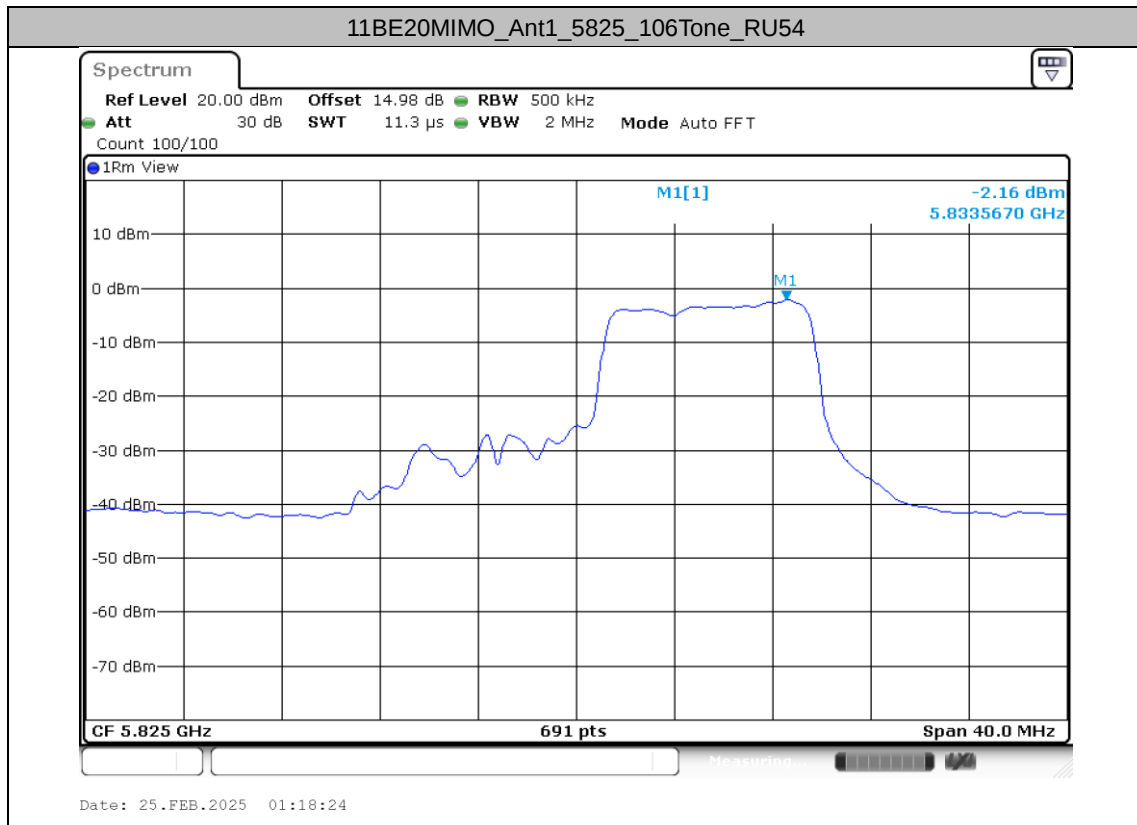

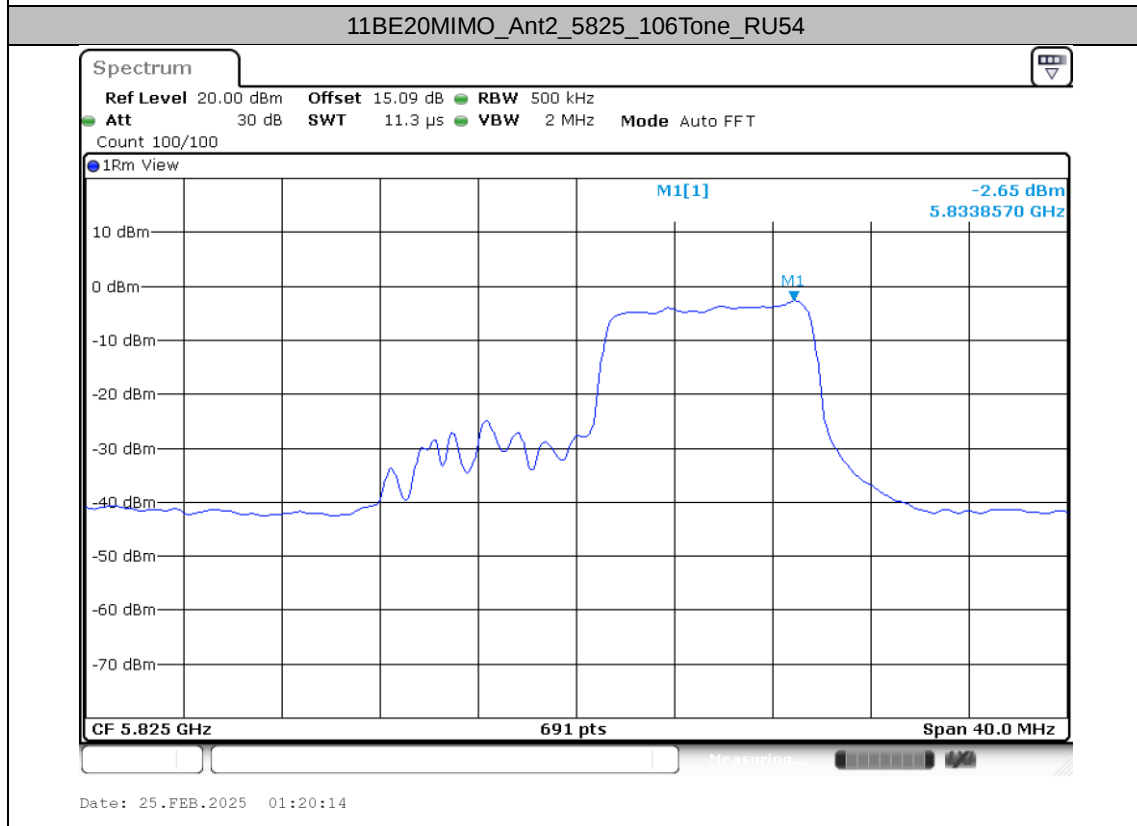

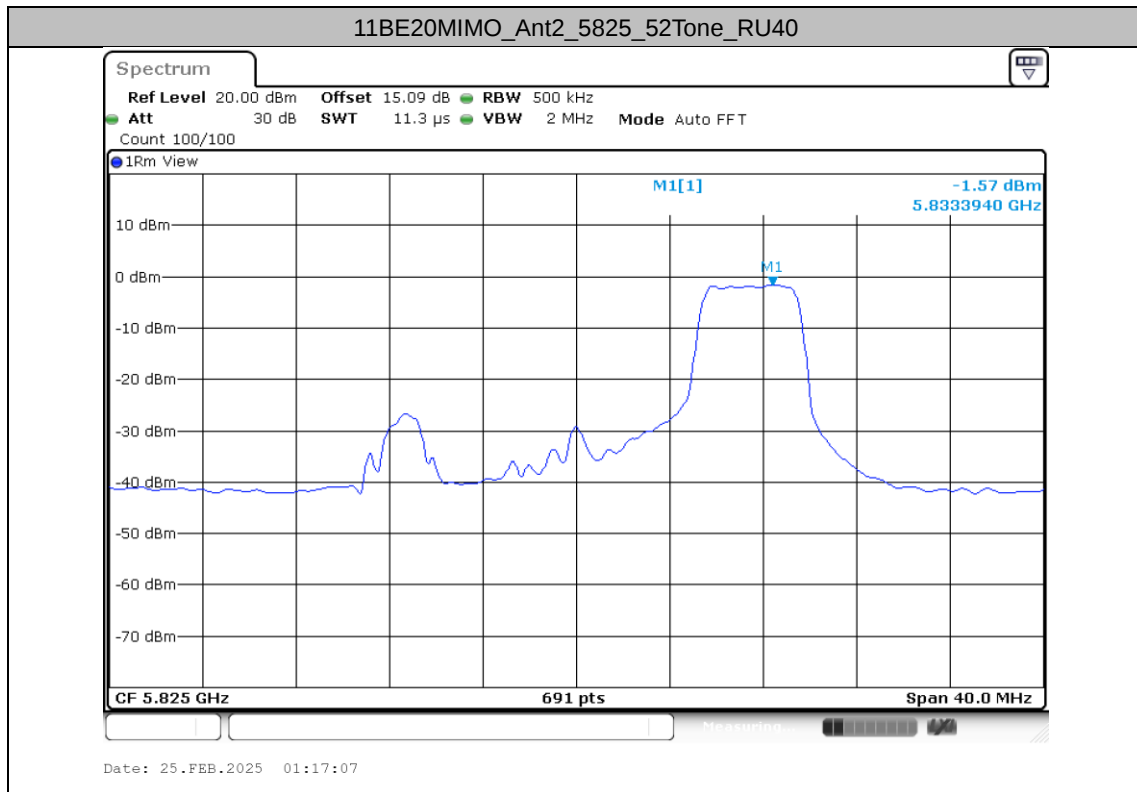


Appendix B. AC Conducted Emission Test Results

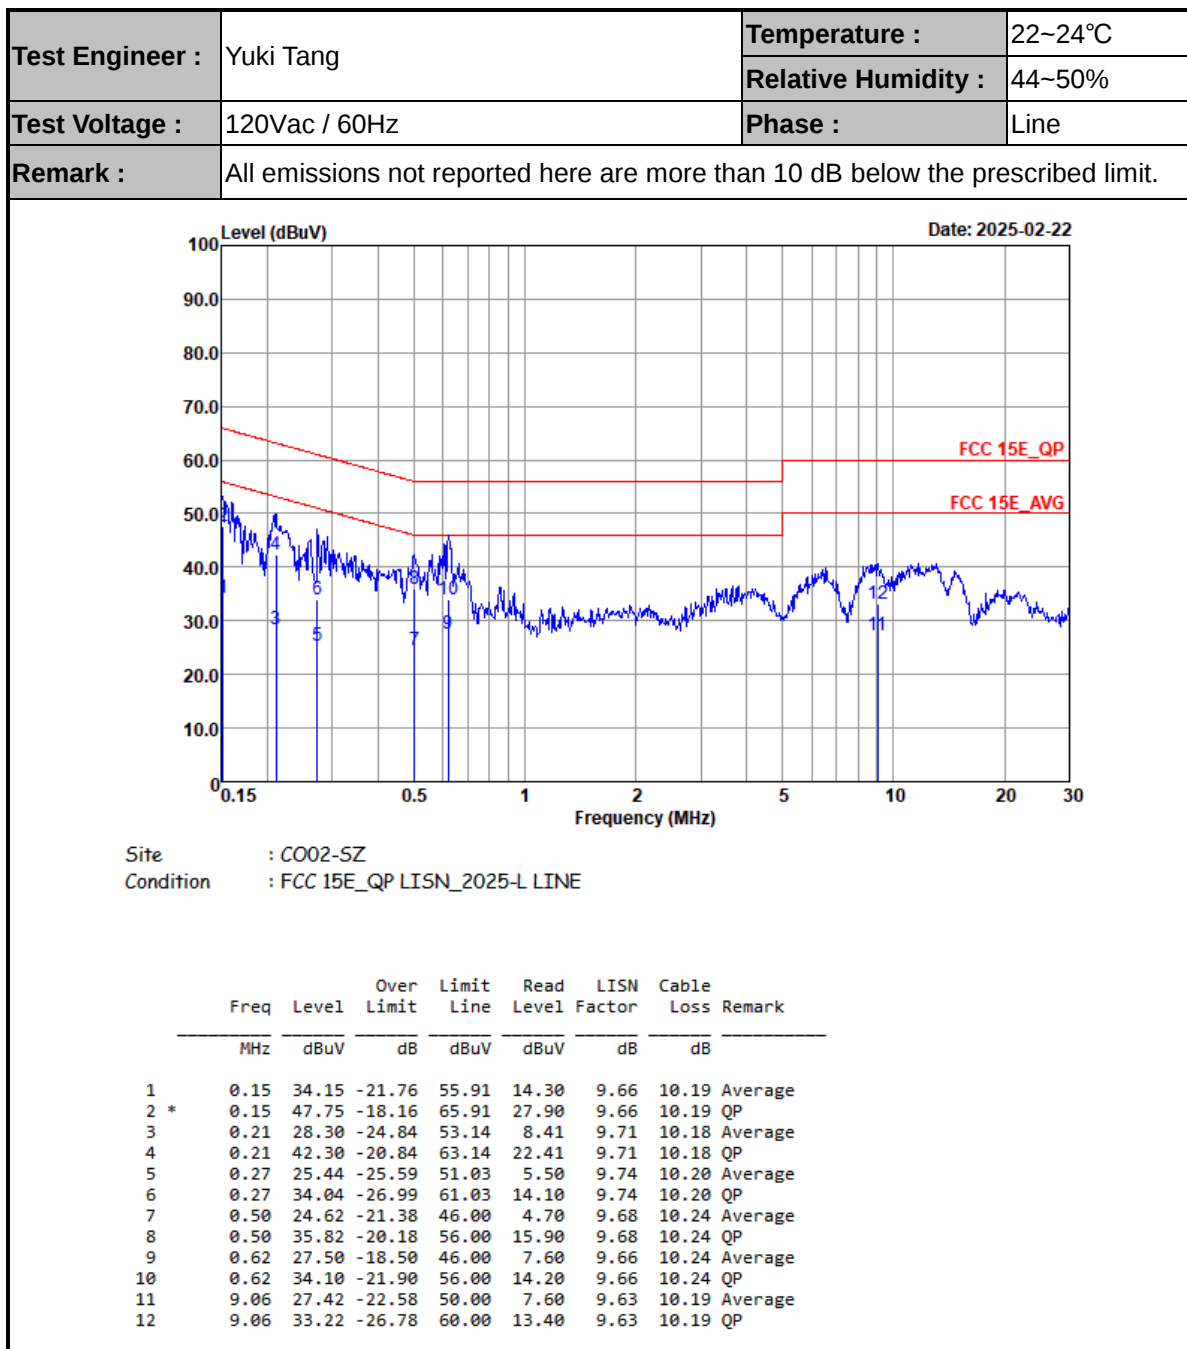



Test Engineer :	Yuki Tang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

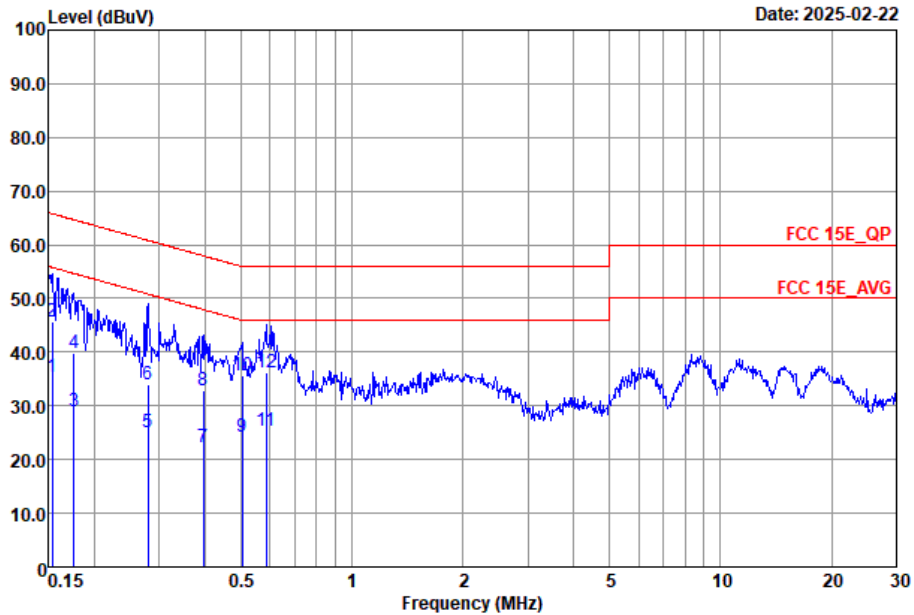

Site : C002-SZ
Condition : FCC 15E_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	35.48	-20.30	55.78	15.70	9.59	10.19	Average
2	0.15	45.58	-20.20	65.78	25.80	9.59	10.19	QP
3	0.18	28.86	-25.82	54.68	8.91	9.77	10.18	Average
4	0.18	39.76	-24.92	64.68	19.81	9.77	10.18	QP
5	0.28	24.96	-25.85	50.81	5.00	9.76	10.20	Average
6	0.28	34.06	-26.75	60.81	14.10	9.76	10.20	QP
7	0.40	22.33	-25.62	47.95	2.30	9.81	10.22	Average
8	0.40	32.93	-25.02	57.95	12.90	9.81	10.22	QP
9	0.50	24.15	-21.85	46.00	4.30	9.61	10.24	Average
10	0.50	35.75	-20.25	56.00	15.90	9.61	10.24	QP
11	0.59	25.47	-20.53	46.00	5.59	9.64	10.24	Average
12 *	0.59	36.17	-19.83	56.00	16.29	9.64	10.24	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	HuaCong Liang	Relative Humidity :	48~49%
		Temperature :	24-25°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	1+2	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	1+2	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	1+2	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	1+2	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	1+2	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	1+2	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	1+2	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	1+2	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	1+2	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.25-5.35	1+2	802.11n HT20	36	5180	MCS0	-	-
Mode 11	U-NII-1	5.25-5.35	1+2	802.11n HT20	44	5220	MCS0	-	-
Mode 12	U-NII-1	5.25-5.35	1+2	802.11n HT20	48	5240	MCS0	-	-
Mode 13	U-NII-2A	5.25-5.35	1+2	802.11n HT20	52	5260	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	1+2	802.11n HT20	60	5300	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	1+2	802.11n HT20	64	5320	MCS0	-	-
Mode 16	U-NII-2C	5.47-5.725	1+2	802.11n HT20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	1+2	802.11n HT20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	1+2	802.11n HT20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	1+2	802.11n HT40	38	5190	MCS0	-	-
Mode 20	U-NII-1	5.15-5.25	1+2	802.11n HT40	46	5230	MCS0	-	-
Mode 21	U-NII-2A	5.25-5.35	1+2	802.11n HT40	54	5270	MCS0	-	-
Mode 22	U-NII-2A	5.25-5.35	1+2	802.11n HT40	62	5310	MCS0	-	-
Mode 23	U-NII-2C	5.47-5.725	1+2	802.11n HT40	102	5510	MCS0	-	-
Mode 24	U-NII-2C	5.47-5.725	1+2	802.11n HT40	134	5670	MCS0	-	-
Mode 25	U-NII-1	5.15-5.25	1+2	802.11ac VHT80	42	5210	MCS0	-	-
Mode 26	U-NII-2A	5.25-5.35	1+2	802.11ac VHT80	58	5290	MCS0	-	-
Mode 27	U-NII-2C	5.47-5.725	1+2	802.11ac VHT80	106	5530	MCS0	-	-
Mode 28	U-NII-2C	5.47-5.725	1+2	802.11ac VHT80	122	5610	MCS0	-	-
Mode 29	U-NII-2A	5.25-5.35	1+2	802.11ac VHT160	50	5250	MCS0	-	-
Mode 30	U-NII-2C	5.47-5.725	1+2	802.11ac VHT160	114	5570	MCS0	-	-
Mode 31	U-NII-1	5.25-5.35	1+2	802.11ax HE20	36	5180	MCS0	-	-
Mode 32	U-NII-1	5.25-5.35	1+2	802.11ax HE20	44	5220	MCS0	-	-
Mode 33	U-NII-1	5.25-5.35	1+2	802.11ax HE20	48	5240	MCS0	-	-
Mode 34	U-NII-2A	5.25-5.35	1+2	802.11ax HE20	52	5260	MCS0	-	-
Mode 35	U-NII-2A	5.25-5.35	1+2	802.11ax HE20	60	5300	MCS0	-	-
Mode 36	U-NII-2A	5.25-5.35	1+2	802.11ax HE20	64	5320	MCS0	-	-



Mode 37	U-NII-2C	5.47-5.725	1+2	802.11ax HE20	100	5500	MCS0	-	-
Mode 38	U-NII-2C	5.47-5.725	1+2	802.11ax HE20	116	5580	MCS0	-	-
Mode 39	U-NII-2C	5.47-5.725	1+2	802.11ax HE20	140	5700	MCS0	-	-
Mode 40	U-NII-1	5.15-5.25	1+2	802.11ax HE40	38	5190	MCS0	-	-
Mode 41	U-NII-1	5.15-5.25	1+2	802.11ax HE40	46	5230	MCS0	-	-
Mode 42	U-NII-2A	5.25-5.35	1+2	802.11ax HE40	54	5270	MCS0	-	-
Mode 43	U-NII-2A	5.25-5.35	1+2	802.11ax HE40	62	5310	MCS0	-	-
Mode 44	U-NII-2C	5.47-5.725	1+2	802.11ax HE40	102	5510	MCS0	-	-
Mode 45	U-NII-2C	5.47-5.725	1+2	802.11ax HE40	134	5670	MCS0	-	-
Mode 46	U-NII-1	5.15-5.25	1+2	802.11ax HE80	42	5210	MCS0	-	-
Mode 47	U-NII-2A	5.25-5.35	1+2	802.11ax HE80	58	5290	MCS0	-	-
Mode 48	U-NII-2C	5.47-5.725	1+2	802.11ax HE80	106	5530	MCS0	-	-
Mode 49	U-NII-2C	5.47-5.725	1+2	802.11ax HE80	122	5610	MCS0	-	-
Mode 50	U-NII-2A	5.25-5.35	1+2	802.11ax HE160	50	5250	MCS0	-	-
Mode 51	U-NII-2C	5.47-5.725	1+2	802.11ax HE160	114	5570	MCS0	-	-
Mode 52	U-NII-1	5.25-5.35	1+2	802.11ax HE20	36	5180	MCS0	Partial RU 52RU37	-
Mode 53	U-NII-2A	5.25-5.35	1+2	802.11ax HE20	64	5320	MCS0	Partial RU 52RU40	-
Mode 54	U-NII-2C	5.47-5.725	1+2	802.11ax HE20	100	5500	MCS0	Partial RU 106RU53	-
Mode 55	U-NII-2C	5.47-5.725	1+2	802.11ax HE20	140	5700	MCS0	Partial RU 52RU40	-
Mode 56	U-NII-1	5.25-5.35	1+2	802.11be EHT20	36	5180	MCS0	-	-
Mode 57	U-NII-1	5.25-5.35	1+2	802.11be EHT20	44	5220	MCS0	-	-
Mode 58	U-NII-1	5.25-5.35	1+2	802.11be EHT20	48	5240	MCS0	-	-
Mode 59	U-NII-2A	5.25-5.35	1+2	802.11be EHT20	52	5260	MCS0	-	-
Mode 60	U-NII-2A	5.25-5.35	1+2	802.11be EHT20	60	5300	MCS0	-	-
Mode 61	U-NII-2A	5.25-5.35	1+2	802.11be EHT20	64	5320	MCS0	-	-
Mode 62	U-NII-2C	5.47-5.725	1+2	802.11be EHT20	100	5500	MCS0	-	-
Mode 63	U-NII-2C	5.47-5.725	1+2	802.11be EHT20	116	5580	MCS0	-	-
Mode 64	U-NII-2C	5.47-5.725	1+2	802.11be EHT20	140	5700	MCS0	-	-
Mode 65	U-NII-1	5.15-5.25	1+2	802.11be EHT40	38	5190	MCS0	-	-
Mode 66	U-NII-1	5.15-5.25	1+2	802.11be EHT40	46	5230	MCS0	-	-
Mode 67	U-NII-2A	5.25-5.35	1+2	802.11be EHT40	54	5270	MCS0	-	-
Mode 68	U-NII-2A	5.25-5.35	1+2	802.11be EHT40	62	5310	MCS0	-	-
Mode 69	U-NII-2C	5.47-5.725	1+2	802.11be EHT40	102	5510	MCS0	-	-
Mode 70	U-NII-2C	5.47-5.725	1+2	802.11be EHT40	134	5670	MCS0	-	-
Mode 71	U-NII-1	5.15-5.25	1+2	802.11be EHT80	42	5210	MCS0	-	-
Mode 72	U-NII-2A	5.25-5.35	1+2	802.11be EHT80	58	5290	MCS0	-	-
Mode 73	U-NII-2C	5.47-5.725	1+2	802.11be EHT80	106	5530	MCS0	-	-
Mode 74	U-NII-2C	5.47-5.725	1+2	802.11be EHT80	122	5610	MCS0	-	-
Mode 75	U-NII-2A	5.25-5.35	1+2	802.11be EHT160	50	5250	MCS0	-	-
Mode 76	U-NII-2C	5.47-5.725	1+2	802.11be EHT160	114	5570	MCS0	-	-
Mode 77	U-NII-1	5.25-5.35	1+2	802.11be EHT20	36	5180	MCS0	Single RU 52RU37	-
Mode 78	U-NII-2A	5.25-5.35	1+2	802.11be EHT20	64	5320	MCS0	Single RU 52RU40	-
Mode 79	U-NII-2C	5.47-5.725	1+2	802.11be EHT20	100	5500	MCS0	Single RU 106RU53	-
Mode 80	U-NII-2C	5.47-5.725	1+2	802.11be EHT20	140	5700	MCS0	Single RU 52RU40	-
Mode 81	U-NII-1	5.25-5.35	1+2	802.11be EHT20	36	5180	MCS0	Small RU	-



								106+26_OFDMA1	
Mode 82	U-NII-2A	5.25-5.35	1+2	802.11be EHT20	64	5320	MCS0	Small RU 106+26_OFDMA2	-
Mode 83	U-NII-2C	5.47-5.725	1+2	802.11be EHT20	100	5500	MCS0	Small RU 106+26_OFDMA1	-
Mode 84	U-NII-2C	5.47-5.725	1+2	802.11be EHT20	140	5700	MCS0	Small RU 106+26_OFDMA2	-
Mode 85	U-NII-3	5.725-5.85	1+2	802.11a	149	5745	6Mbps	-	-
Mode 86	U-NII-3	5.725-5.85	1+2	802.11a	157	5785	6Mbps	-	-
Mode 87	U-NII-3	5.725-5.85	1+2	802.11a	165	5825	6Mbps	-	-
Mode 88	U-NII-3	5.725-5.85	1+2	802.11n HT20	149	5745	MCS0	-	-
Mode 89	U-NII-3	5.725-5.85	1+2	802.11n HT20	157	5785	MCS0	-	-
Mode 90	U-NII-3	5.725-5.85	1+2	802.11n HT20	165	5825	MCS0	-	-
Mode 91	U-NII-3	5.725-5.85	1+2	802.11n HT40	151	5755	MCS0	-	-
Mode 92	U-NII-3	5.725-5.85	1+2	802.11n HT40	159	5795	MCS0	-	-
Mode 93	U-NII-3	5.725-5.85	1+2	802.11ac VHT80	155	5775	MCS0	-	-
Mode 94	U-NII-3	5.725-5.85	1+2	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 95	U-NII-3	5.725-5.85	1+2	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 96	U-NII-3	5.725-5.85	1+2	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 97	U-NII-3	5.725-5.85	1+2	802.11ax HE40	151	5755	MCS0	Full RU	-
Mode 98	U-NII-3	5.725-5.85	1+2	802.11ax HE40	159	5795	MCS0	Full RU	-
Mode 99	U-NII-3	5.725-5.85	1+2	802.11ax HE80	155	5775	MCS0	Full RU	-
Mode 100	U-NII-3	5.725-5.85	1+2	802.11ax HE20	149	5745	MCS0	Partial RU 52RU37	-
Mode 101	U-NII-3	5.725-5.85	1+2	802.11ax HE20	165	5825	MCS0	Partial RU 52RU40	-
Mode 102	U-NII-3	5.725-5.85	1+2	802.11be EHT20	149	5745	MCS0	Full RU	-
Mode 103	U-NII-3	5.725-5.85	1+2	802.11be EHT20	157	5785	MCS0	Full RU	-
Mode 104	U-NII-3	5.725-5.85	1+2	802.11be EHT20	165	5825	MCS0	Full RU	-
Mode 105	U-NII-3	5.725-5.85	1+2	802.11be EHT40	151	5755	MCS0	Full RU	-
Mode 106	U-NII-3	5.725-5.85	1+2	802.11be EHT40	159	5795	MCS0	Full RU	-
Mode 107	U-NII-3	5.725-5.85	1+2	802.11be EHT80	155	5775	MCS0	Full RU	-
Mode 108	U-NII-3	5.725-5.85	1+2	802.11be EHT20	149	5745	MCS0	Single RU 52RU37	-
Mode 109	U-NII-3	5.725-5.85	1+2	802.11be EHT20	165	5825	MCS0	Single RU 52RU40	-
Mode 110	U-NII-3	5.725-5.85	1+2	802.11be EHT20	149	5745	MCS0	Small RU 106+26_OFDMA1	-
Mode 111	U-NII-3	5.725-5.85	1+2	802.11be EHT20	165	5825	MCS0	Small RU 106+26_OFDMA2	-
Mode 112	U-NII-1	5.15-5.25	1+2	802.11be EHT80	42	5210	MCS0	Large RU 484+242_4	-
Mode 113	U-NII-2A	5.25-5.35	1+2	802.11be EHT80	58	5290	MCS0	Large RU 484+242_1	-
Mode 114	U-NII-2C	5.47-5.725	1+2	802.11be EHT80	106	5530	MCS0	Large RU 484+242_4	-
Mode 115	U-NII-2C	5.47-5.725	1+2	802.11be EHT80	122	5610	MCS0	Large RU 484+242_1	-
Mode 116	U-NII-2A	5.25-5.35	1+2	802.11be EHT160	50	5250	MCS0	Large RU 996+484-3	-
Mode 117	U-NII-2C	5.47-5.725	1+2	802.11be EHT160	114	5570	MCS0	Large RU 996+484_4	-
Mode 118	U-NII-3	5.725-5.85	1+2	802.11be EHT80	155	5775	MCS0	Large RU 484+242_4	-
Mode 119	U-NII-1	5.15-5.25	1+2	802.11be EHT80	42	5210	MCS0	Puncturing 20M_4	-
Mode 120	U-NII-2A	5.25-5.35	1+2	802.11be EHT80	58	5290	MCS0	Puncturing 20M_1	-
Mode 121	U-NII-2C	5.47-5.725	1+2	802.11be EHT80	106	5530	MCS0	Puncturing 20M_4	-
Mode 122	U-NII-2C	5.47-5.725	1+2	802.11be EHT80	122	5610	MCS0	Puncturing 20M_1	-
Mode 123	U-NII-2A	5.25-5.35	1+2	802.11be EHT160	50	5250	MCS0	Puncturing 40M-3	-



Mode 124	U-NII-2C	5.47-5.725	1+2	802.11be EHT160	114	5570	MCS0	Puncturing 40M-4	-
Mode 125	U-NII-3	5.725-5.85	1+2	802.11be EHT80	155	5775	MCS0	Puncturing 20M_4	-
Mode 126	U-NII-2A	5.25-5.35	1+2	802.11be EHT160	50	5250	MCS0	Puncturing 20M-5	-
Mode 127	U-NII-2C	5.47-5.725	1+2	802.11be EHT160	114	5570	MCS0	Puncturing 20M-8	-
Mode 128	U-NII-1	5.25-5.35	1+2	802.11n HT40	38	5190	MCS0	-	LF
Mode 129	U-NII-3	5.725-5.85	1+2	802.11be EHT80	155	5775	MCS0	Puncturing 20M_4	LF
Mode 130	CO-TX	2400-2483.5	0+1	802.11n HT20	11	2462	MCS0		
		5.15-5.25	1+2	802.11n HT40	38	5190	MCS0	-	-
Mode 131	CO-TX	2400-2483.5	1	Bluetooth-LE_GSFK	00	2402	2Mbps		
		5.15-5.25	1+2	802.11n HT40	38	5190	MCS0	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.63	47.82	54.00	-6.18	V	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	47.85	68.30	-20.45	H	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	48.52	68.30	-19.78	H	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	47.52	68.30	-20.78	V	Peak	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520.00	49.04	68.30	-19.26	H	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	15900.00	47.81	74.00	-26.19	V	Peak	Pass	Harmonic
6	802.11a	64	-	-	-	-	-	-	-	Band Edge
6	802.11a	64	10640.00	47.90	74.00	-26.10	H	Peak	Pass	Harmonic
7	802.11a	100	-	-	-	-	-	-	-	Band Edge
7	802.11a	100	16500.00	48.42	68.30	-19.88	V	Peak	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	16740.00	48.89	68.30	-19.41	V	Peak	Pass	Harmonic
9	802.11a	140	-	-	-	-	-	-	-	Band Edge
9	802.11a	140	17100.00	48.81	68.30	-19.49	H	Peak	Pass	Harmonic
10	802.11n HT20	36	5149.94	48.70	54.00	-5.30	V	AVERAGE	Pass	Band Edge
10	802.11n HT20	36	10360.00	48.41	68.30	-19.89	V	Peak	Pass	Harmonic
11	802.11n HT20	44	-	-	-	-	-	-	-	Band Edge
11	802.11n HT20	44	10440.00	49.22	68.30	-19.08	V	Peak	Pass	Harmonic
12	802.11n HT20	48	-	-	-	-	-	-	-	Band Edge
12	802.11n HT20	48	10480.00	48.48	68.30	-19.82	H	Peak	Pass	Harmonic
13	802.11n HT20	52	-	-	-	-	-	-	-	Band Edge
13	802.11n HT20	52	10520.00	49.18	68.30	-19.12	H	Peak	Pass	Harmonic
14	802.11n HT20	60	-	-	-	-	-	-	-	Band Edge
14	802.11n HT20	60	15900.00	47.91	74.00	-26.09	V	Peak	Pass	Harmonic
15	802.11n HT20	64	5350.10	47.50	54.00	-6.50	V	AVERAGE	Pass	Band Edge
15	802.11n HT20	64	15960.00	47.76	74.00	-26.24	V	Peak	Pass	Harmonic
16	802.11n HT20	100	5470.00	60.28	68.30	-8.02	V	PEAK	Pass	Band Edge



16	802.11n HT20	100	16500.00	48.64	68.30	-19.66	V	Peak	Pass	Harmonic
17	802.11n HT20	116	-	-	-	-	-	-	-	Band Edge
17	802.11n HT20	116	16740.00	48.83	68.30	-19.47	V	Peak	Pass	Harmonic
18	802.11n HT20	140	5725.26	59.46	68.30	-8.84	V	PEAK	Pass	Band Edge
18	802.11n HT20	140	17100.00	48.32	68.30	-19.98	H	Peak	Pass	Harmonic
19	802.11n HT40	38	5149.63	48.91	54.00	-5.09	V	AVERAGE	Pass	Band Edge
19	802.11n HT40	38	10380.00	47.75	68.30	-20.55	H	Peak	Pass	Harmonic
20	802.11n HT40	46	5126.18	43.88	54.00	-10.12	V	AVERAGE	Pass	Band Edge
20	802.11n HT40	46	-	-	-	-	-	-	-	Harmonic
21	802.11n HT40	54	5356.37	44.37	54.00	-9.63	V	AVERAGE	Pass	Band Edge
21	802.11n HT40	54	-	-	-	-	-	-	-	Harmonic
22	802.11n HT40	62	5350.11	48.90	54.00	-5.10	V	AVERAGE	Pass	Band Edge
22	802.11n HT40	62	-	-	-	-	-	-	-	Harmonic
23	802.11n HT40	102	5459.68	48.04	54.00	-5.96	V	AVERAGE	Pass	Band Edge
23	802.11n HT40	102	-	-	-	-	-	-	-	Harmonic
24	802.11n HT40	134	5433.39	42.82	54.00	-11.18	V	AVERAGE	Pass	Band Edge
24	802.11n HT40	134	-	-	-	-	-	-	-	Harmonic
25	802.11ac VHT80	42	5149.44	48.19	54.00	-5.81	V	AVERAGE	Pass	Band Edge
25	802.11ac VHT80	42	-	-	-	-	-	-	-	Harmonic
26	802.11ac VHT80	58	5350.52	48.34	54.00	-5.66	V	AVERAGE	Pass	Band Edge
26	802.11ac VHT80	58	-	-	-	-	-	-	-	Harmonic
27	802.11ac VHT80	106	5459.80	48.88	54.00	-5.12	V	AVERAGE	Pass	Band Edge
27	802.11ac VHT80	106	-	-	-	-	-	-	-	Harmonic
28	802.11ac VHT80	122	5458.42	43.97	54.00	-10.03	V	AVERAGE	Pass	Band Edge
28	802.11ac VHT80	122	-	-	-	-	-	-	-	Harmonic
29	802.11ac VHT160	50	5122.25	45.04	54.00	-8.96	V	AVERAGE	Pass	Band Edge
29	802.11ac VHT160	50	10500.00	48.55	68.30	-19.75	H	Peak	Pass	Harmonic
30	802.11ac VHT160	114	5437.34	47.43	54.00	-6.57	V	AVERAGE	Pass	Band Edge
30	802.11ac VHT160	114	16710.00	48.14	68.30	-20.16	V	Peak	Pass	Harmonic
31	802.11ax HE20	36	5149.58	45.16	54.00	-8.84	V	AVERAGE	Pass	Band Edge
31	802.11ax HE20	36	10360.00	48.83	68.30	-19.47	V	Peak	Pass	Harmonic
32	802.11ax HE20	44	-	-	-	-	-	-	-	Band Edge
32	802.11ax HE20	44	10440.00	49.10	68.30	-19.20	V	Peak	Pass	Harmonic
33	802.11ax HE20	48	-	-	-	-	-	-	-	Band Edge
33	802.11ax HE20	48	10480.00	48.19	68.30	-20.11	V	Peak	Pass	Harmonic
34	802.11ax HE20	52	-	-	-	-	-	-	-	Band Edge
34	802.11ax HE20	52	10520.00	48.87	68.30	-19.43	V	Peak	Pass	Harmonic
35	802.11ax HE20	60	-	-	-	-	-	-	-	Band Edge
35	802.11ax HE20	60	10600.00	47.77	74.00	-26.23	V	Peak	Pass	Harmonic
36	802.11ax HE20	64	5350.66	44.68	54.00	-9.32	V	AVERAGE	Pass	Band Edge
36	802.11ax HE20	64	10640.00	47.88	74.00	-26.12	H	Peak	Pass	Harmonic
37	802.11ax HE20	100	5456.95	44.47	54.00	-9.53	V	AVERAGE	Pass	Band Edge
37	802.11ax HE20	100	16500.00	48.49	68.30	-19.81	H	Peak	Pass	Harmonic
38	802.11ax HE20	116	-	-	-	-	-	-	-	Band Edge
38	802.11ax HE20	116	16740.00	48.62	68.30	-19.68	V	Peak	Pass	Harmonic



39	802.11ax HE20	140	5728.28	55.54	68.30	-12.76	V	PEAK	Pass	Band Edge
39	802.11ax HE20	140	17100.00	48.89	68.30	-19.41	V	Peak	Pass	Harmonic
40	802.11ax HE40	38	5149.53	46.63	54.00	-7.37	V	AVERAGE	Pass	Band Edge
40	802.11ax HE40	38	-	-	-	-	-	-	-	Harmonic
41	802.11ax HE40	46	5148.26	43.92	54.00	-10.08	V	AVERAGE	Pass	Band Edge
41	802.11ax HE40	46	-	-	-	-	-	-	-	Harmonic
42	802.11ax HE40	54	5358.26	44.74	54.00	-9.26	V	AVERAGE	Pass	Band Edge
42	802.11ax HE40	54	-	-	-	-	-	-	-	Harmonic
43	802.11ax HE40	62	5351.18	44.77	54.00	-9.23	V	AVERAGE	Pass	Band Edge
43	802.11ax HE40	62	-	-	-	-	-	-	-	Harmonic
44	802.11ax HE40	102	5458.42	44.56	54.00	-9.44	V	AVERAGE	Pass	Band Edge
44	802.11ax HE40	102	-	-	-	-	-	-	-	Harmonic
45	802.11ax HE40	134	5459.92	42.79	54.00	-11.21	V	AVERAGE	Pass	Band Edge
45	802.11ax HE40	134	-	-	-	-	-	-	-	Harmonic
46	802.11ax HE80	42	5149.84	44.63	54.00	-9.37	V	AVERAGE	Pass	Band Edge
46	802.11ax HE80	42	-	-	-	-	-	-	-	Harmonic
47	802.11ax HE80	58	5350.79	46.60	54.00	-7.40	V	AVERAGE	Pass	Band Edge
47	802.11ax HE80	58	-	-	-	-	-	-	-	Harmonic
48	802.11ax HE80	106	5454.13	44.18	54.00	-9.82	V	AVERAGE	Pass	Band Edge
48	802.11ax HE80	106	-	-	-	-	-	-	-	Harmonic
49	802.11ax HE80	122	5458.81	43.44	54.00	-10.56	V	AVERAGE	Pass	Band Edge
49	802.11ax HE80	122	-	-	-	-	-	-	-	Harmonic
50	802.11ax HE160	50	5395.01	45.83	54.00	-8.17	V	AVERAGE	Pass	Band Edge
50	802.11ax HE160	50	10500.00	47.95	68.30	-20.35	V	Peak	Pass	Harmonic
51	802.11ax HE160	114	5447.35	47.20	54.00	-6.80	V	AVERAGE	Pass	Band Edge
51	802.11ax HE160	114	16710.00	48.06	68.30	-20.24	V	Peak	Pass	Harmonic
52	802.11ax HE20	36	5134.82	43.18	54.00	-10.82	V	AVERAGE	Pass	Band Edge
52	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
53	802.11ax HE20	64	5373.76	43.17	54.00	-10.83	V	AVERAGE	Pass	Band Edge
53	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
54	802.11ax HE20	100	5457.40	42.89	54.00	-11.11	V	AVERAGE	Pass	Band Edge
54	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
55	802.11ax HE20	140	5746.87	54.72	68.30	-13.58	H	PEAK	Pass	Band Edge
55	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
56	802.11be EHT20	36	5149.85	45.00	54.00	-9.00	V	AVERAGE	Pass	Band Edge
56	802.11be EHT20	36	10360.00	48.45	68.30	-19.85	H	Peak	Pass	Harmonic
57	802.11be EHT20	44	-	-	-	-	-	-	-	Band Edge
57	802.11be EHT20	44	10440.00	48.43	68.30	-19.87	H	Peak	Pass	Harmonic
58	802.11be EHT20	48	-	-	-	-	-	-	-	Band Edge
58	802.11be EHT20	48	10480.00	48.50	68.30	-19.80	V	Peak	Pass	Harmonic
59	802.11be EHT20	52	-	-	-	-	-	-	-	Band Edge
59	802.11be EHT20	52	10520.00	48.76	68.30	-19.54	V	Peak	Pass	Harmonic
60	802.11be EHT20	60	-	-	-	-	-	-	-	Band Edge
60	802.11be EHT20	60	10600.00	47.63	74.00	-26.37	H	Peak	Pass	Harmonic
61	802.11be EHT20	64	5350.31	44.94	54.00	-9.06	V	AVERAGE	Pass	Band Edge



61	802.11be EHT20	64	15960.00	47.98	74.00	-26.02	V	Peak	Pass	Harmonic
62	802.11be EHT20	100	5460.00	44.69	54.00	-9.31	V	AVERAGE	Pass	Band Edge
62	802.11be EHT20	100	16500.00	48.59	68.30	-19.71	V	Peak	Pass	Harmonic
63	802.11be EHT20	116	-	-	-	-	-	-	-	Band Edge
63	802.11be EHT20	116	16740.00	48.69	68.30	-19.61	H	Peak	Pass	Harmonic
64	802.11be EHT20	140	5738.51	56.06	68.30	-12.24	V	PEAK	Pass	Band Edge
64	802.11be EHT20	140	17100.00	48.55	68.30	-19.75	H	Peak	Pass	Harmonic
65	802.11be EHT40	38	5149.26	45.46	54.00	-8.54	V	AVERAGE	Pass	Band Edge
65	802.11be EHT40	38	-	-	-	-	-	-	-	Harmonic
66	802.11be EHT40	46	5147.34	43.97	54.00	-10.03	V	AVERAGE	Pass	Band Edge
66	802.11be EHT40	46	-	-	-	-	-	-	-	Harmonic
67	802.11be EHT40	54	5351.23	44.79	54.00	-9.21	V	AVERAGE	Pass	Band Edge
67	802.11be EHT40	54	-	-	-	-	-	-	-	Harmonic
68	802.11be EHT40	62	5352.39	44.88	54.00	-9.12	V	AVERAGE	Pass	Band Edge
68	802.11be EHT40	62	-	-	-	-	-	-	-	Harmonic
69	802.11be EHT40	102	5459.68	45.27	54.00	-8.73	V	AVERAGE	Pass	Band Edge
69	802.11be EHT40	102	-	-	-	-	-	-	-	Harmonic
70	802.11be EHT40	134	5459.60	42.83	54.00	-11.17	V	AVERAGE	Pass	Band Edge
70	802.11be EHT40	134	-	-	-	-	-	-	-	Harmonic
71	802.11be EHT80	42	5149.65	44.58	54.00	-9.42	V	AVERAGE	Pass	Band Edge
71	802.11be EHT80	42	-	-	-	-	-	-	-	Harmonic
72	802.11be EHT80	58	5358.09	48.18	54.00	-5.82	V	AVERAGE	Pass	Band Edge
72	802.11be EHT80	58	-	-	-	-	-	-	-	Harmonic
73	802.11be EHT80	106	5459.98	43.83	54.00	-10.17	V	AVERAGE	Pass	Band Edge
73	802.11be EHT80	106	-	-	-	-	-	-	-	Harmonic
74	802.11be EHT80	122	5454.94	43.42	54.00	-10.58	V	AVERAGE	Pass	Band Edge
74	802.11be EHT80	122	-	-	-	-	-	-	-	Harmonic
75	802.11be EHT160	50	5112.38	45.16	54.00	-8.84	V	AVERAGE	Pass	Band Edge
75	802.11be EHT160	50	10500.00	47.69	68.30	-20.61	V	Peak	Pass	Harmonic
76	802.11be EHT160	114	5435.05	45.23	54.00	-8.77	V	AVERAGE	Pass	Band Edge
76	802.11be EHT160	114	16710.00	47.88	68.30	-20.42	V	Peak	Pass	Harmonic
77	802.11be EHT20	36	5133.56	43.67	54.00	-10.33	V	AVERAGE	Pass	Band Edge
77	802.11be EHT20	36	-	-	-	-	-	-	-	Harmonic
78	802.11be EHT20	64	5352.76	43.01	54.00	-10.99	V	AVERAGE	Pass	Band Edge
78	802.11be EHT20	64	-	-	-	-	-	-	-	Harmonic
79	802.11be EHT20	100	5453.50	42.85	54.00	-11.15	V	AVERAGE	Pass	Band Edge
79	802.11be EHT20	100	-	-	-	-	-	-	-	Harmonic
80	802.11be EHT20	140	5730.36	54.72	68.30	-13.58	V	PEAK	Pass	Band Edge
80	802.11be EHT20	140	-	-	-	-	-	-	-	Harmonic
81	802.11be EHT20	36	5131.94	43.08	54.00	-10.92	V	AVERAGE	Pass	Band Edge
81	802.11be EHT20	36	-	-	-	-	-	-	-	Harmonic
82	802.11be EHT20	64	5356.68	42.75	54.00	-11.25	V	AVERAGE	Pass	Band Edge
82	802.11be EHT20	64	-	-	-	-	-	-	-	Harmonic
83	802.11be EHT20	100	5357.05	42.71	54.00	-11.29	V	AVERAGE	Pass	Band Edge
83	802.11be EHT20	100	-	-	-	-	-	-	-	Harmonic



84	802.11be EHT20	140	5759.22	54.35	68.30	-13.95	V	PEAK	Pass	Band Edge
84	802.11be EHT20	140	-	-	-	-	-	-	-	Harmonic
85	802.11a	149	-	-	-	-	-	-	-	Band Edge
85	802.11a	149	17235.00	48.63	68.30	-19.67	H	Peak	Pass	Harmonic
86	802.11a	157	-	-	-	-	-	-	-	Band Edge
86	802.11a	157	17355.00	48.94	68.30	-19.36	H	Peak	Pass	Harmonic
87	802.11a	165	-	-	-	-	-	-	-	Band Edge
87	802.11a	165	17475.00	48.34	68.30	-19.96	H	Peak	Pass	Harmonic
88	802.11n HT20	149	5618.36	55.61	68.30	-12.69	H	PEAK	Pass	Band Edge
88	802.11n HT20	149	17235.00	48.46	68.30	-19.84	V	Peak	Pass	Harmonic
89	802.11n HT20	157	-	-	-	-	-	-	-	Band Edge
89	802.11n HT20	157	17355.00	48.54	68.30	-19.76	H	Peak	Pass	Harmonic
90	802.11n HT20	165	5923.94	55.98	68.98	-13.00	H	PEAK	Pass	Band Edge
90	802.11n HT20	165	17475.00	48.64	68.30	-19.66	V	Peak	Pass	Harmonic
91	802.11n HT40	151	5648.90	56.51	68.30	-11.79	H	PEAK	Pass	Band Edge
91	802.11n HT40	151	-	-	-	-	-	-	-	Harmonic
92	802.11n HT40	159	5650.04	55.12	68.33	-13.21	H	PEAK	Pass	Band Edge
92	802.11n HT40	159	-	-	-	-	-	-	-	Harmonic
93	802.11ac VHT80	155	5649.46	57.04	68.30	-11.26	H	PEAK	Pass	Band Edge
93	802.11ac VHT80	155	-	-	-	-	-	-	-	Harmonic
94	802.11ax HE20	149	5646.49	56.96	68.30	-11.34	H	PEAK	Pass	Band Edge
94	802.11ax HE20	149	17235.00	48.71	68.30	-19.59	H	Peak	Pass	Harmonic
95	802.11ax HE20	157	-	-	-	-	-	-	-	Band Edge
95	802.11ax HE20	157	17355.00	49.08	68.30	-19.22	V	Peak	Pass	Harmonic
96	802.11ax HE20	165	5939.83	55.27	68.30	-13.03	H	PEAK	Pass	Band Edge
96	802.11ax HE20	165	17475.00	48.32	68.30	-19.98	H	Peak	Pass	Harmonic
97	802.11ax HE40	151	5649.69	57.13	68.30	-11.17	H	PEAK	Pass	Band Edge
97	802.11ax HE40	151	-	-	-	-	-	-	-	Harmonic
98	802.11ax HE40	159	5648.65	56.24	68.30	-12.06	H	PEAK	Pass	Band Edge
98	802.11ax HE40	159	-	-	-	-	-	-	-	Harmonic
99	802.11ax HE80	155	5647.71	56.74	68.30	-11.56	H	PEAK	Pass	Band Edge
99	802.11ax HE80	155	-	-	-	-	-	-	-	Harmonic
100	802.11ax HE20	149	5647.27	53.75	68.30	-14.55	V	PEAK	Pass	Band Edge
100	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
101	802.11ax HE20	165	5945.63	53.83	68.30	-14.47	H	PEAK	Pass	Band Edge
101	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
102	802.11be EHT20	149	5626.19	55.65	68.30	-12.65	H	PEAK	Pass	Band Edge
102	802.11be EHT20	149	17235.00	48.68	68.30	-19.62	V	Peak	Pass	Harmonic
103	802.11be EHT20	157	-	-	-	-	-	-	-	Band Edge
103	802.11be EHT20	157	17355.00	48.96	68.30	-19.34	V	Peak	Pass	Harmonic
104	802.11be EHT20	165	5941.44	54.81	68.30	-13.49	H	PEAK	Pass	Band Edge
104	802.11be EHT20	165	17475.00	48.59	68.30	-19.71	H	Peak	Pass	Harmonic
105	802.11be EHT40	151	5640.07	57.97	68.30	-10.33	H	PEAK	Pass	Band Edge
105	802.11be EHT40	151	-	-	-	-	-	-	-	Harmonic
106	802.11be EHT40	159	5638.53	55.34	68.30	-12.96	H	PEAK	Pass	Band Edge



106	802.11be EHT40	159	-	-	-	-	-	-	-	Harmonic
107	802.11be EHT80	155	5640.86	58.57	68.30	-9.73	H	PEAK	Pass	Band Edge
107	802.11be EHT80	155	-	-	-	-	-	-	-	Harmonic
108	802.11be EHT20	149	5618.13	55.36	68.30	-12.94	H	PEAK	Pass	Band Edge
108	802.11be EHT20	149	-	-	-	-	-	-	-	Harmonic
109	802.11be EHT20	165	5937.50	53.08	68.30	-15.22	H	PEAK	Pass	Band Edge
109	802.11be EHT20	165	-	-	-	-	-	-	-	Harmonic
110	802.11be EHT20	149	5620.45	54.77	68.30	-13.53	V	PEAK	Pass	Band Edge
110	802.11be EHT20	149	-	-	-	-	-	-	-	Harmonic
111	802.11be EHT20	165	5933.13	53.95	68.30	-14.35	H	PEAK	Pass	Band Edge
111	802.11be EHT20	165	-	-	-	-	-	-	-	Harmonic
112	802.11be EHT80	42	5149.94	46.75	54.00	-7.25	V	AVERAGE	Pass	Band Edge
112	802.11be EHT80	42	-	-	-	-	-	-	-	Harmonic
113	802.11be EHT80	58	5354.77	47.85	54.00	-6.15	V	AVERAGE	Pass	Band Edge
113	802.11be EHT80	58	-	-	-	-	-	-	-	Harmonic
114	802.11be EHT80	106	5468.55	62.29	68.30	-6.01	V	PEAK	Pass	Band Edge
114	802.11be EHT80	106	-	-	-	-	-	-	-	Harmonic
115	802.11be EHT80	122	5458.55	43.30	54.00	-10.70	V	AVERAGE	Pass	Band Edge
115	802.11be EHT80	122	-	-	-	-	-	-	-	Harmonic
116	802.11be EHT160	50	5397.55	47.54	54.00	-6.46	V	AVERAGE	Pass	Band Edge
116	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
117	802.11be EHT160	114	5445.59	46.41	54.00	-7.59	V	AVERAGE	Pass	Band Edge
117	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
118	802.11be EHT80	155	5638.41	59.10	68.30	-9.20	H	PEAK	Pass	Band Edge
118	802.11be EHT80	155	-	-	-	-	-	-	-	Harmonic
119	802.11be EHT80	42	5149.23	47.33	54.00	-6.67	V	AVERAGE	Pass	Band Edge
119	802.11be EHT80	42	-	-	-	-	-	-	-	Harmonic
120	802.11be EHT80	58	5357.42	48.41	54.00	-5.59	V	AVERAGE	Pass	Band Edge
120	802.11be EHT80	58	-	-	-	-	-	-	-	Harmonic
121	802.11be EHT80	106	5462.05	61.25	68.30	-7.05	V	PEAK	Pass	Band Edge
121	802.11be EHT80	106	-	-	-	-	-	-	-	Harmonic
122	802.11be EHT80	122	5457.51	42.84	54.00	-11.16	V	AVERAGE	Pass	Band Edge
122	802.11be EHT80	122	-	-	-	-	-	-	-	Harmonic
123	802.11be EHT160	50	5407.19	48.84	54.00	-5.16	V	AVERAGE	Pass	Band Edge
123	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
124	802.11be EHT160	114	5452.43	43.85	54.00	-10.15	V	AVERAGE	Pass	Band Edge
124	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
125	802.11be EHT80	155	5650.66	63.14	68.79	-5.65	H	PEAK	Pass	Band Edge
125	802.11be EHT80	155	17325.00	47.51	68.30	-20.79	V	Peak	Pass	Harmonic
126	802.11be EHT160	50	5128.88	48.33	54.00	-5.67	V	AVERAGE	Pass	Band Edge
126	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
127	802.11be EHT160	114	5455.51	45.19	54.00	-8.81	V	AVERAGE	Pass	Band Edge
127	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
128	802.11n HT40	38	46.49	28.69	40.00	-11.31	V	PEAK	Pass	LF
129	802.11be EHT80	155	45.52	28.89	40.00	-11.11	V	Peak	Pass	LF







130	802.11n HT20	11	2483.55	37.32	54.00	-16.68	V	AVERAGE	Pass	Band Edge
	802.11n HT40	38	5149.15	49.27	54.00	-4.73	V	AVERAGE	Pass	Band Edge
	802.11n HT40+11n HT20	38	10380.00	48.07	68.30	-20.23	V	Peak	Pass	Harmonic
131	Bluetooth-LE_GSKF	00	2389.80	41.31	54.00	-12.69	V	AVERAGE	Pass	Band Edge
	802.11n HT40	38	5149.91	47.78	54.00	-6.22	V	AVERAGE	Pass	Band Edge
	802.11n HT40+ Bluetooth-LE_GSKF	38	10380.00	47.85	68.30	-20.45	V	Peak	Pass	Harmonic





Mode	1																																																																																	
	Band Edge																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-02-23 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.51</td><td>54.80</td><td>74.00</td><td>-19.20</td><td>40.64</td><td>35.70</td><td>11.09</td><td>32.63</td><td>149</td><td>108</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.51	54.80	74.00	-19.20	40.64	35.70	11.09	32.63	149	108	PEAK	Level (dBuV/m) Date: 2025-02-23 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>102.39</td><td>-----</td><td>-----</td><td>88.19</td><td>35.77</td><td>11.07</td><td>32.64</td><td>149</td><td>108</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	102.39	-----	-----	88.19	35.77	11.07	32.64	149	108	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5149.51	54.80	74.00	-19.20	40.64	35.70	11.09	32.63	149	108	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5180.00	102.39	-----	-----	88.19	35.77	11.07	32.64	149	108	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2025-02-23 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.85</td><td>44.58</td><td>54.00</td><td>-9.42</td><td>30.42</td><td>35.70</td><td>11.09</td><td>32.63</td><td>149</td><td>108</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.85	44.58	54.00	-9.42	30.42	35.70	11.09	32.63	149	108	AVERAGE	Level (dBuV/m) Date: 2025-02-23 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.75</td><td>-----</td><td>-----</td><td>81.55</td><td>35.77</td><td>11.07</td><td>32.64</td><td>149</td><td>108</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	95.75	-----	-----	81.55	35.77	11.07	32.64	149	108	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5149.85	44.58	54.00	-9.42	30.42	35.70	11.09	32.63	149	108	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5180.00	95.75	-----	-----	81.55	35.77	11.07	32.64	149	108	AVERAGE																																																																							

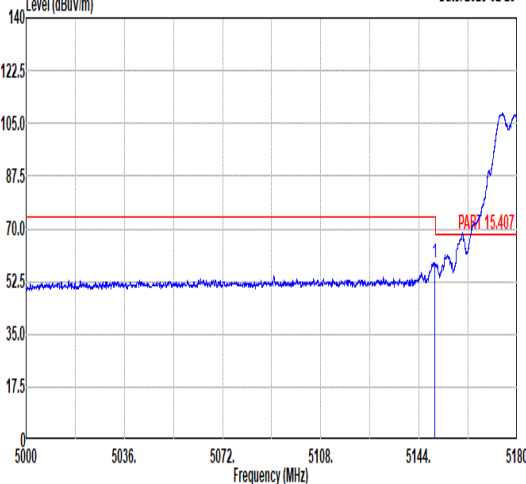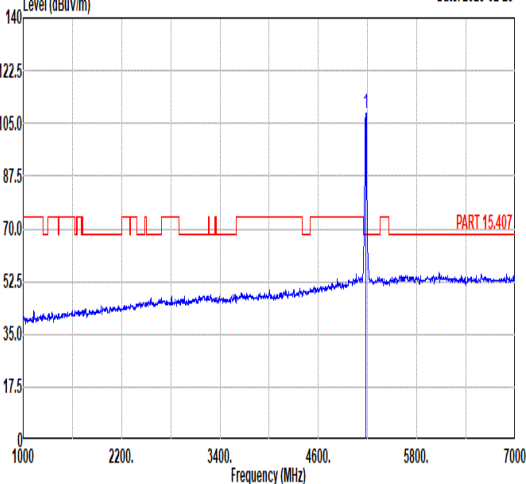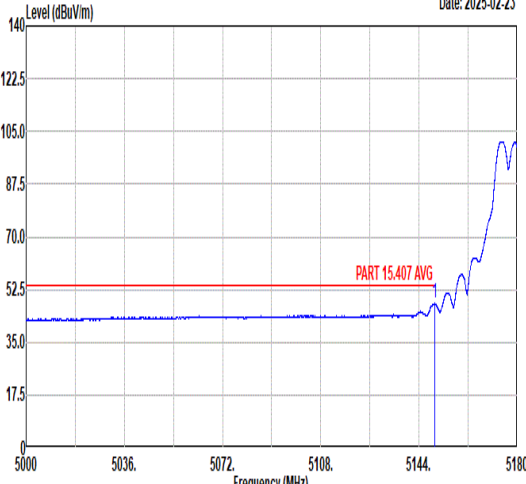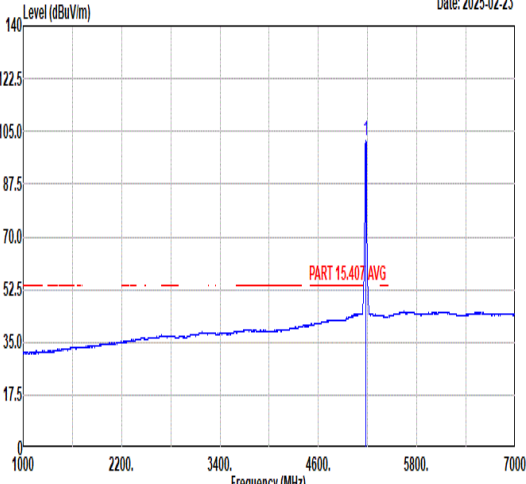

Mode	1																																																																																			
	Band Edge																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																			
ANT	1+2																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-02-23  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.67</td><td>58.58</td><td>74.00</td><td>-15.42</td><td>44.42</td><td>35.70</td><td>11.09</td><td>32.63</td><td>100</td><td>173 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.67	58.58	74.00	-15.42	44.42	35.70	11.09	32.63	100	173 PEAK	Level (dBuV/m) Date: 2025-02-23  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>108.29</td><td>-----</td><td>-----</td><td>94.10</td><td>35.76</td><td>11.07</td><td>32.64</td><td>100</td><td>173 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	108.29	-----	-----	94.10	35.76	11.07	32.64	100	173 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5149.67	58.58	74.00	-15.42	44.42	35.70	11.09	32.63	100	173 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5180.00	108.29	-----	-----	94.10	35.76	11.07	32.64	100	173 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2025-02-23  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.63</td><td>47.82</td><td>54.00</td><td>-6.18</td><td>33.66</td><td>35.70</td><td>11.09</td><td>32.63</td><td>100</td><td>173 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.63	47.82	54.00	-6.18	33.66	35.70	11.09	32.63	100	173 AVERAGE	Level (dBuV/m) Date: 2025-02-23  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>101.72</td><td>-----</td><td>-----</td><td>87.53</td><td>35.76</td><td>11.07</td><td>32.64</td><td>100</td><td>173 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.72	-----	-----	87.53	35.76	11.07	32.64	100	173 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5149.63	47.82	54.00	-6.18	33.66	35.70	11.09	32.63	100	173 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5180.00	101.72	-----	-----	87.53	35.76	11.07	32.64	100	173 AVERAGE																																																																										

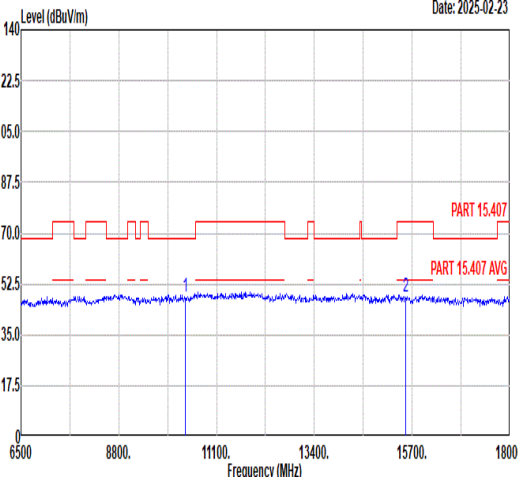
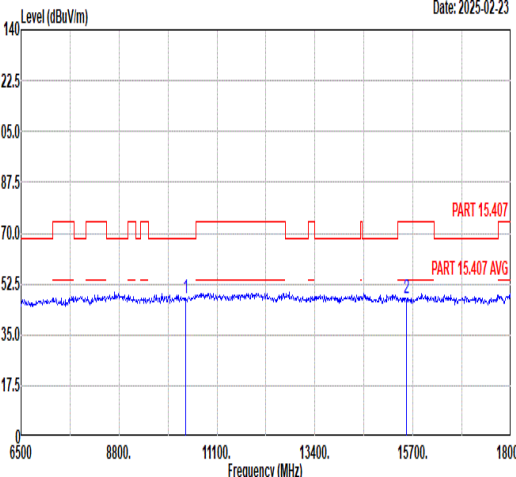


Mode	1																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																			
ANT	1+2																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>47.85</td><td>68.30</td><td>-20.45</td><td>47.03</td><td>38.10</td><td>14.15</td><td>51.43</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.86</td><td>74.00</td><td>-26.14</td><td>42.60</td><td>40.60</td><td>16.85</td><td>52.19</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	47.85	68.30	-20.45	47.03	38.10	14.15	51.43	---	---	Peak	2	15540.00	47.86	74.00	-26.14	42.60	40.60	16.85	52.19	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>47.29</td><td>68.30</td><td>-21.01</td><td>46.47</td><td>38.10</td><td>14.15</td><td>51.43</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.56</td><td>74.00</td><td>-26.44</td><td>42.30</td><td>40.60</td><td>16.85</td><td>52.19</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	47.29	68.30	-21.01	46.47	38.10	14.15	51.43	---	---	Peak	2	15540.00	47.56	74.00	-26.44	42.30	40.60	16.85	52.19	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10360.00	47.85	68.30	-20.45	47.03	38.10	14.15	51.43	---	---	Peak																																																																																																									
2	15540.00	47.86	74.00	-26.14	42.60	40.60	16.85	52.19	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10360.00	47.29	68.30	-21.01	46.47	38.10	14.15	51.43	---	---	Peak																																																																																																									
2	15540.00	47.56	74.00	-26.44	42.30	40.60	16.85	52.19	---	---	Peak																																																																																																									





Mode	2																																																																																											
	Harmonic																																																																																											
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																											
ANT	1+2																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg	Level (dBuV/m) Date: 2025-02-23 Frequency (MHz)						Level (dBuV/m) Date: 2025-02-23 Frequency (MHz)																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10440.00</td><td>48.52</td><td>68.30</td><td>-19.78</td><td>47.59</td><td>38.14</td><td>14.20</td><td>51.41</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.05</td><td>74.00</td><td>-26.95</td><td>41.96</td><td>40.60</td><td>16.94</td><td>52.45</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10440.00	48.52	68.30	-19.78	47.59	38.14	14.20	51.41	---	---	Peak	2	15660.00	47.05	74.00	-26.95	41.96	40.60	16.94	52.45	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10440.00</td><td>47.98</td><td>68.30</td><td>-20.32</td><td>47.05</td><td>38.14</td><td>14.20</td><td>51.41</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.04</td><td>74.00</td><td>-26.96</td><td>41.95</td><td>40.60</td><td>16.94</td><td>52.45</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10440.00	47.98	68.30	-20.32	47.05	38.14	14.20	51.41	---	---	Peak	2	15660.00	47.04	74.00	-26.96	41.95	40.60	16.94	52.45	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
1	10440.00	48.52	68.30	-19.78	47.59	38.14	14.20	51.41	---	---	Peak																																																																																	
2	15660.00	47.05	74.00	-26.95	41.96	40.60	16.94	52.45	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
1	10440.00	47.98	68.30	-20.32	47.05	38.14	14.20	51.41	---	---	Peak																																																																																	
2	15660.00	47.04	74.00	-26.96	41.95	40.60	16.94	52.45	---	---	Peak																																																																																	
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10440.00</td><td>48.52</td><td>68.30</td><td>-19.78</td><td>47.59</td><td>38.14</td><td>14.20</td><td>51.41</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.05</td><td>74.00</td><td>-26.95</td><td>41.96</td><td>40.60</td><td>16.94</td><td>52.45</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10440.00	48.52	68.30	-19.78	47.59	38.14	14.20	51.41	---	---	Peak	2	15660.00	47.05	74.00	-26.95	41.96	40.60	16.94	52.45	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10440.00</td><td>47.98</td><td>68.30</td><td>-20.32</td><td>47.05</td><td>38.14</td><td>14.20</td><td>51.41</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.04</td><td>74.00</td><td>-26.96</td><td>41.95</td><td>40.60</td><td>16.94</td><td>52.45</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10440.00	47.98	68.30	-20.32	47.05	38.14	14.20	51.41	---	---	Peak	2	15660.00	47.04	74.00	-26.96	41.95	40.60	16.94	52.45	---	---	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
1	10440.00	48.52	68.30	-19.78	47.59	38.14	14.20	51.41	---	---	Peak																																																																																	
2	15660.00	47.05	74.00	-26.95	41.96	40.60	16.94	52.45	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
1	10440.00	47.98	68.30	-20.32	47.05	38.14	14.20	51.41	---	---	Peak																																																																																	
2	15660.00	47.04	74.00	-26.96	41.95	40.60	16.94	52.45	---	---	Peak																																																																																	

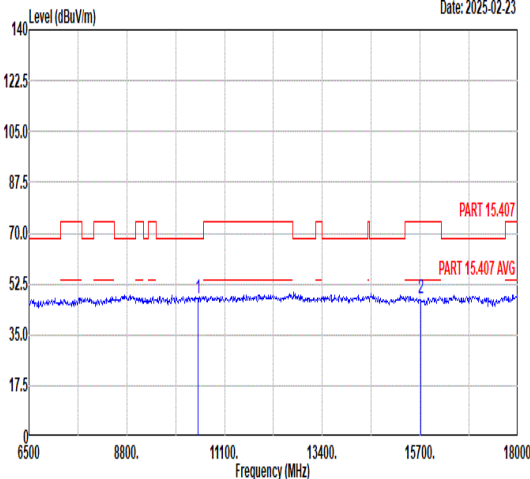
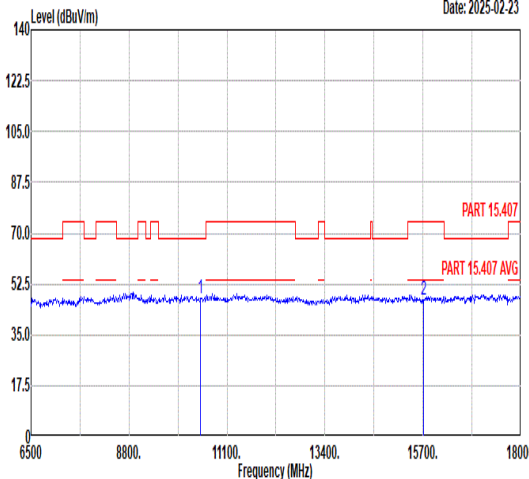


Mode	3																																																																																											
	Harmonic																																																																																											
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																											
ANT	1+2																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr></thead><tbody><tr><td>1</td><td>10480.00</td><td>47.30</td><td>68.30</td><td>-21.00</td><td>46.29</td><td>38.18</td><td>14.23</td><td>51.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.77</td><td>74.00</td><td>-26.23</td><td>42.74</td><td>40.62</td><td>16.99</td><td>52.58</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10480.00	47.30	68.30	-21.00	46.29	38.18	14.23	51.40	---	---	Peak	2	15720.00	47.77	74.00	-26.23	42.74	40.62	16.99	52.58	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr></thead><tbody><tr><td>1</td><td>10480.00</td><td>47.52</td><td>68.30</td><td>-20.78</td><td>46.51</td><td>38.18</td><td>14.23</td><td>51.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.20</td><td>74.00</td><td>-26.80</td><td>42.17</td><td>40.62</td><td>16.99</td><td>52.58</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10480.00	47.52	68.30	-20.78	46.51	38.18	14.23	51.40	---	---	Peak	2	15720.00	47.20	74.00	-26.80	42.17	40.62	16.99	52.58	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
1	10480.00	47.30	68.30	-21.00	46.29	38.18	14.23	51.40	---	---	Peak																																																																																	
2	15720.00	47.77	74.00	-26.23	42.74	40.62	16.99	52.58	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
1	10480.00	47.52	68.30	-20.78	46.51	38.18	14.23	51.40	---	---	Peak																																																																																	
2	15720.00	47.20	74.00	-26.80	42.17	40.62	16.99	52.58	---	---	Peak																																																																																	

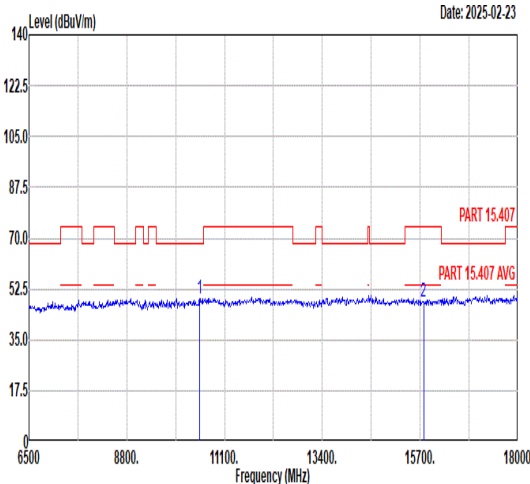
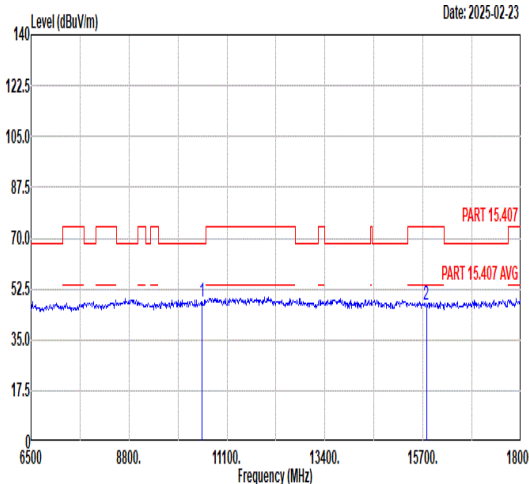


Mode	4																																																																																							
	Harmonic																																																																																							
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																							
ANT	1+2																																																																																							
Pol.	Horizontal								Vertical																																																																															
Peak Avg																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>10520.00</td><td>49.04</td><td>68.30</td><td>-19.26</td><td>47.97</td><td>38.20</td><td>14.25</td><td>51.38 --- Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.96</td><td>74.00</td><td>-26.04</td><td>42.96</td><td>40.68</td><td>17.04</td><td>52.72 --- Peak</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	10520.00	49.04	68.30	-19.26	47.97	38.20	14.25	51.38 --- Peak	2	15780.00	47.96	74.00	-26.04	42.96	40.68	17.04	52.72 --- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>10520.00</td><td>47.99</td><td>68.30</td><td>-20.31</td><td>46.92</td><td>38.20</td><td>14.25</td><td>51.38 --- Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.17</td><td>74.00</td><td>-26.83</td><td>42.17</td><td>40.68</td><td>17.04</td><td>52.72 --- Peak</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	10520.00	47.99	68.30	-20.31	46.92	38.20	14.25	51.38 --- Peak	2	15780.00	47.17	74.00	-26.83	42.17	40.68	17.04	52.72 --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																															
1	10520.00	49.04	68.30	-19.26	47.97	38.20	14.25	51.38 --- Peak																																																																																
2	15780.00	47.96	74.00	-26.04	42.96	40.68	17.04	52.72 --- Peak																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																
1	10520.00	47.99	68.30	-20.31	46.92	38.20	14.25	51.38 --- Peak																																																																																
2	15780.00	47.17	74.00	-26.83	42.17	40.68	17.04	52.72 --- Peak																																																																																

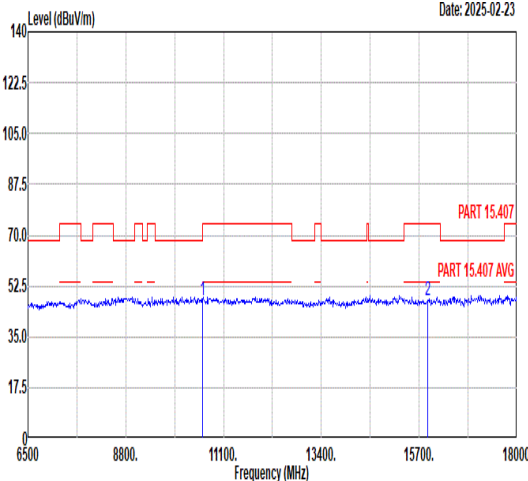
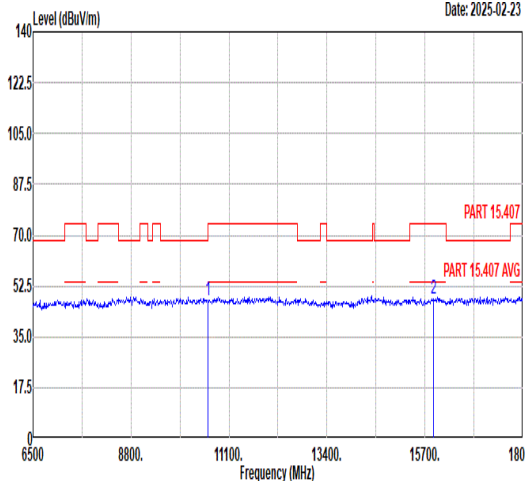


Mode	5																																																																															
	Harmonic																																																																															
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																															
ANT	1+2																																																																															
Pol.	Horizontal								Vertical																																																																							
Peak Avg																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10600.00</td><td>47.45</td><td>74.00</td><td>-26.55</td><td>46.25</td><td>38.20</td><td>14.30</td></tr><tr><td>2</td><td>15900.00</td><td>47.68</td><td>74.00</td><td>-26.32</td><td>42.62</td><td>40.90</td><td>17.14</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10600.00	47.45	74.00	-26.55	46.25	38.20	14.30	2	15900.00	47.68	74.00	-26.32	42.62	40.90	17.14	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10600.00</td><td>47.36</td><td>74.00</td><td>-26.64</td><td>46.16</td><td>38.20</td><td>14.30</td></tr><tr><td>2</td><td>15900.00</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>42.75</td><td>40.90</td><td>17.14</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10600.00	47.36	74.00	-26.64	46.16	38.20	14.30	2	15900.00	47.81	74.00	-26.19	42.75	40.90	17.14
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																								
1	10600.00	47.45	74.00	-26.55	46.25	38.20	14.30																																																																									
2	15900.00	47.68	74.00	-26.32	42.62	40.90	17.14																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	10600.00	47.36	74.00	-26.64	46.16	38.20	14.30																																																																									
2	15900.00	47.81	74.00	-26.19	42.75	40.90	17.14																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10600.00</td><td>47.45</td><td>74.00</td><td>-26.55</td><td>46.25</td><td>38.20</td><td>14.30</td></tr><tr><td>2</td><td>15900.00</td><td>47.68</td><td>74.00</td><td>-26.32</td><td>42.62</td><td>40.90</td><td>17.14</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10600.00	47.45	74.00	-26.55	46.25	38.20	14.30	2	15900.00	47.68	74.00	-26.32	42.62	40.90	17.14	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10600.00</td><td>47.36</td><td>74.00</td><td>-26.64</td><td>46.16</td><td>38.20</td><td>14.30</td></tr><tr><td>2</td><td>15900.00</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>42.75</td><td>40.90</td><td>17.14</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10600.00	47.36	74.00	-26.64	46.16	38.20	14.30	2	15900.00	47.81	74.00	-26.19	42.75	40.90	17.14	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	10600.00	47.45	74.00	-26.55	46.25	38.20	14.30																																																																									
2	15900.00	47.68	74.00	-26.32	42.62	40.90	17.14																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	10600.00	47.36	74.00	-26.64	46.16	38.20	14.30																																																																									
2	15900.00	47.81	74.00	-26.19	42.75	40.90	17.14																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10600.00</td><td>47.45</td><td>74.00</td><td>-26.55</td><td>46.25</td><td>38.20</td><td>14.30</td></tr><tr><td>2</td><td>15900.00</td><td>47.68</td><td>74.00</td><td>-26.32</td><td>42.62</td><td>40.90</td><td>17.14</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10600.00	47.45	74.00	-26.55	46.25	38.20	14.30	2	15900.00	47.68	74.00	-26.32	42.62	40.90	17.14	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10600.00</td><td>47.36</td><td>74.00</td><td>-26.64</td><td>46.16</td><td>38.20</td><td>14.30</td></tr><tr><td>2</td><td>15900.00</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>42.75</td><td>40.90</td><td>17.14</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10600.00	47.36	74.00	-26.64	46.16	38.20	14.30	2	15900.00	47.81	74.00	-26.19	42.75	40.90	17.14	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	10600.00	47.45	74.00	-26.55	46.25	38.20	14.30																																																																									
2	15900.00	47.68	74.00	-26.32	42.62	40.90	17.14																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	10600.00	47.36	74.00	-26.64	46.16	38.20	14.30																																																																									
2	15900.00	47.81	74.00	-26.19	42.75	40.90	17.14																																																																									

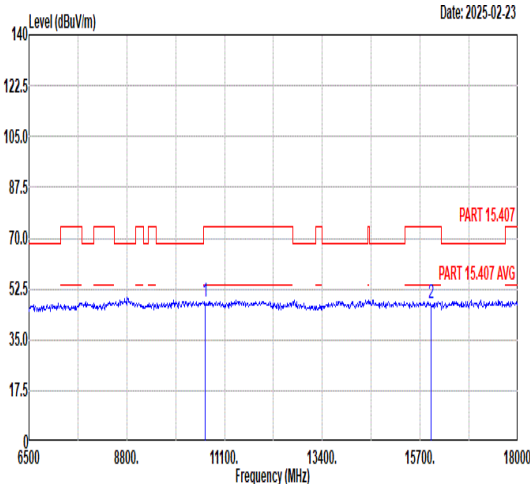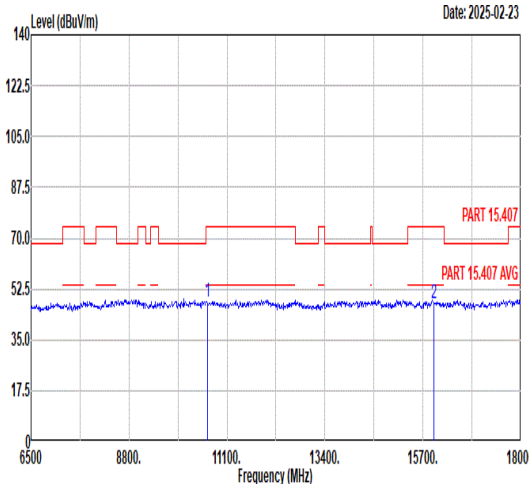

Mode	6																																																																																															
	Harmonic																																																																																															
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																															
ANT	1+2																																																																																															
Pol.	Horizontal						Vertical																																																																																									
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10640.00</td><td>47.90</td><td>74.00</td><td>-26.10</td><td>46.68</td><td>38.16</td><td>14.32</td><td>51.26</td></tr><tr><td>2</td><td>15960.00</td><td>47.64</td><td>74.00</td><td>-26.36</td><td>42.54</td><td>41.02</td><td>17.19</td><td>53.11</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	47.90	74.00	-26.10	46.68	38.16	14.32	51.26	2	15960.00	47.64	74.00	-26.36	42.54	41.02	17.19	53.11	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10640.00</td><td>47.89</td><td>74.00</td><td>-26.11</td><td>46.67</td><td>38.16</td><td>14.32</td><td>51.26</td></tr><tr><td>2</td><td>15960.00</td><td>47.80</td><td>74.00</td><td>-26.20</td><td>42.70</td><td>41.02</td><td>17.19</td><td>53.11</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	47.89	74.00	-26.11	46.67	38.16	14.32	51.26	2	15960.00	47.80	74.00	-26.20	42.70	41.02	17.19	53.11
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	10640.00	47.90	74.00	-26.10	46.68	38.16	14.32	51.26																																																																																								
2	15960.00	47.64	74.00	-26.36	42.54	41.02	17.19	53.11																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	10640.00	47.89	74.00	-26.11	46.67	38.16	14.32	51.26																																																																																								
2	15960.00	47.80	74.00	-26.20	42.70	41.02	17.19	53.11																																																																																								

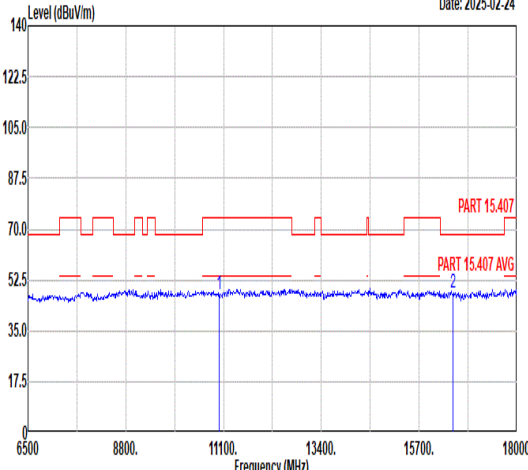
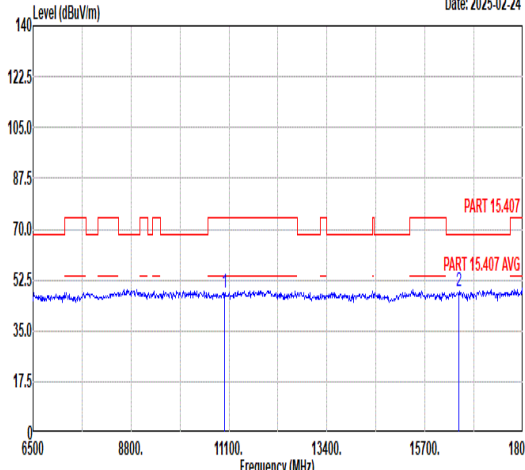


Mode	7																																																																																	
	Harmonic																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	Level (dBuV/m) Date: 2025-02-24  1110016500 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 11000.00</td><td>47.35</td><td>74.00</td><td>-26.65</td><td>45.71</td><td>38.00</td><td>14.54</td><td>50.90</td></tr><tr><td>2 16500.00</td><td>47.95</td><td>68.30</td><td>-20.35</td><td>42.49</td><td>41.20</td><td>17.36</td><td>53.10</td></tr></tbody></table> Level (dBuV/m) Date: 2025-02-24  1110016500 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 11000.00</td><td>47.89</td><td>74.00</td><td>-26.11</td><td>46.25</td><td>38.00</td><td>14.54</td><td>50.90</td></tr><tr><td>2 16500.00</td><td>48.42</td><td>68.30</td><td>-19.88</td><td>42.96</td><td>41.20</td><td>17.36</td><td>53.10</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11000.00	47.35	74.00	-26.65	45.71	38.00	14.54	50.90	2 16500.00	47.95	68.30	-20.35	42.49	41.20	17.36	53.10		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11000.00	47.89	74.00	-26.11	46.25	38.00	14.54	50.90	2 16500.00	48.42	68.30	-19.88	42.96	41.20	17.36	53.10	
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 11000.00	47.35	74.00	-26.65	45.71	38.00	14.54	50.90																																																																											
2 16500.00	47.95	68.30	-20.35	42.49	41.20	17.36	53.10																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 11000.00	47.89	74.00	-26.11	46.25	38.00	14.54	50.90																																																																											
2 16500.00	48.42	68.30	-19.88	42.96	41.20	17.36	53.10																																																																											



Mode	8																																																							
	Harmonic																																																							
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																							
ANT	1+2																																																							
Pol.	Horizontal																																																							
Peak Avg	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>47.15</td><td>74.00</td><td>-26.85</td><td>45.16</td><td>38.06</td><td>14.64</td><td>50.71 --- --- Peak</td></tr><tr><td>2</td><td>16740.00</td><td>48.84</td><td>68.30</td><td>-19.46</td><td>42.78</td><td>41.44</td><td>17.43</td><td>52.81 --- --- Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11160.00	47.15	74.00	-26.85	45.16	38.06	14.64	50.71 --- --- Peak	2	16740.00	48.84	68.30	-19.46	42.78	41.44	17.43	52.81 --- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																
1	11160.00	47.15	74.00	-26.85	45.16	38.06	14.64	50.71 --- --- Peak																																																
2	16740.00	48.84	68.30	-19.46	42.78	41.44	17.43	52.81 --- --- Peak																																																
Peak Avg	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>47.67</td><td>74.00</td><td>-26.33</td><td>45.68</td><td>38.06</td><td>14.64</td><td>50.71 --- --- Peak</td></tr><tr><td>2</td><td>16740.00</td><td>48.89</td><td>68.30</td><td>-19.41</td><td>42.83</td><td>41.44</td><td>17.43</td><td>52.81 --- --- Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11160.00	47.67	74.00	-26.33	45.68	38.06	14.64	50.71 --- --- Peak	2	16740.00	48.89	68.30	-19.41	42.83	41.44	17.43	52.81 --- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																
1	11160.00	47.67	74.00	-26.33	45.68	38.06	14.64	50.71 --- --- Peak																																																
2	16740.00	48.89	68.30	-19.41	42.83	41.44	17.43	52.81 --- --- Peak																																																

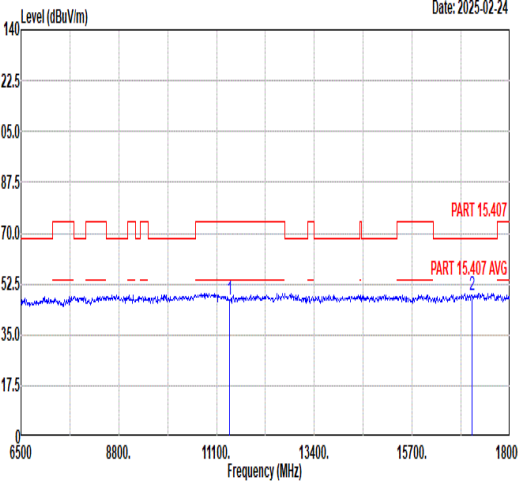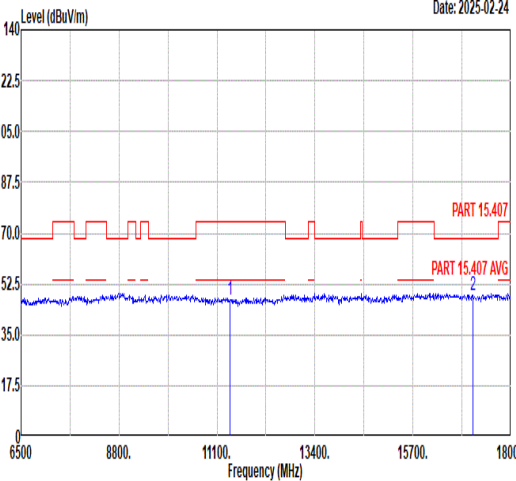

Mode	9																																																																																
	Harmonic																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																
ANT	1+2																																																																																
Pol.	Horizontal								Vertical																																																																								
Peak Avg	 Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a red line for the peak level and a blue line for the average level. The peak level is approximately 70 dBuV/m, and the average level is approximately 52.7 dBuV/m. The frequency range is from 6500 to 18000 MHz. The date is 2025-02-24.								 Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a red line for the peak level and a blue line for the average level. The peak level is approximately 70 dBuV/m, and the average level is approximately 52.7 dBuV/m. The frequency range is from 6500 to 18000 MHz. The date is 2025-02-24.																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>11400.00</td><td>47.28</td><td>74.00</td><td>-26.72</td><td>44.72</td><td>38.20</td><td>14.78 50.42 --- --- Peak</td></tr><tr><td>2</td><td>17100.00</td><td>48.81</td><td>68.30</td><td>-19.49</td><td>41.00</td><td>43.00</td><td>17.53 52.72 --- --- Peak</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	1	11400.00	47.28	74.00	-26.72	44.72	38.20	14.78 50.42 --- --- Peak	2	17100.00	48.81	68.30	-19.49	41.00	43.00	17.53 52.72 --- --- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>11400.00</td><td>47.10</td><td>74.00</td><td>-26.90</td><td>44.54</td><td>38.20</td><td>14.78 50.42 --- --- Peak</td></tr><tr><td>2</td><td>17100.00</td><td>48.53</td><td>68.30</td><td>-19.77</td><td>40.72</td><td>43.00</td><td>17.53 52.72 --- --- Peak</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	1	11400.00	47.10	74.00	-26.90	44.54	38.20	14.78 50.42 --- --- Peak	2	17100.00	48.53	68.30	-19.77	40.72	43.00	17.53 52.72 --- --- Peak	
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																									
1	11400.00	47.28	74.00	-26.72	44.72	38.20	14.78 50.42 --- --- Peak																																																																										
2	17100.00	48.81	68.30	-19.49	41.00	43.00	17.53 52.72 --- --- Peak																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																										
1	11400.00	47.10	74.00	-26.90	44.54	38.20	14.78 50.42 --- --- Peak																																																																										
2	17100.00	48.53	68.30	-19.77	40.72	43.00	17.53 52.72 --- --- Peak																																																																										
<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11400.00</td><td>47.28</td><td>74.00</td><td>-26.72</td><td>44.72</td><td>38.20</td><td>14.78</td><td>50.42</td><td>---</td><td>---</td></tr><tr><td>2</td><td>17100.00</td><td>48.81</td><td>68.30</td><td>-19.49</td><td>41.00</td><td>43.00</td><td>17.53</td><td>52.72</td><td>---</td><td>---</td></tr></tbody></table>									MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	47.28	74.00	-26.72	44.72	38.20	14.78	50.42	---	---	2	17100.00	48.81	68.30	-19.49	41.00	43.00	17.53	52.72	---	---	<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11400.00</td><td>47.10</td><td>74.00</td><td>-26.90</td><td>44.54</td><td>38.20</td><td>14.78</td><td>50.42</td><td>---</td><td>---</td></tr><tr><td>2</td><td>17100.00</td><td>48.53</td><td>68.30</td><td>-19.77</td><td>40.72</td><td>43.00</td><td>17.53</td><td>52.72</td><td>---</td><td>---</td></tr></tbody></table>									MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	47.10	74.00	-26.90	44.54	38.20	14.78	50.42	---	---	2	17100.00	48.53	68.30	-19.77	40.72	43.00	17.53	52.72	---	---
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	11400.00	47.28	74.00	-26.72	44.72	38.20	14.78	50.42	---	---																																																																							
2	17100.00	48.81	68.30	-19.49	41.00	43.00	17.53	52.72	---	---																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	11400.00	47.10	74.00	-26.90	44.54	38.20	14.78	50.42	---	---																																																																							
2	17100.00	48.53	68.30	-19.77	40.72	43.00	17.53	52.72	---	---																																																																							





Mode	10																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.25-5.35_802.11n HT20_CH36_5180MHz																																																																																									
ANT	1+2																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.51</td><td>56.68</td><td>74.00</td><td>-17.32</td><td>42.52</td><td>35.70</td><td>11.09</td><td>32.63</td><td>160</td><td>109</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.51	56.68	74.00	-17.32	42.52	35.70	11.09	32.63	160	109	PEAK	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>102.04</td><td>-----</td><td>-----</td><td>87.85</td><td>35.76</td><td>11.07</td><td>32.64</td><td>160</td><td>109</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	102.04	-----	-----	87.85	35.76	11.07	32.64	160	109	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5149.51	56.68	74.00	-17.32	42.52	35.70	11.09	32.63	160	109	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5180.00	102.04	-----	-----	87.85	35.76	11.07	32.64	160	109	PEAK																																																																															
Avg	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.85</td><td>45.32</td><td>54.00</td><td>-8.68</td><td>31.16</td><td>35.70</td><td>11.09</td><td>32.63</td><td>160</td><td>109</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.85	45.32	54.00	-8.68	31.16	35.70	11.09	32.63	160	109	AVERAGE	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.31</td><td>-----</td><td>-----</td><td>81.11</td><td>35.77</td><td>11.07</td><td>32.64</td><td>160</td><td>109</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	95.31	-----	-----	81.11	35.77	11.07	32.64	160	109	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5149.85	45.32	54.00	-8.68	31.16	35.70	11.09	32.63	160	109	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5180.00	95.31	-----	-----	81.11	35.77	11.07	32.64	160	109	AVERAGE																																																																															



Mode	10																																																																									
	Band Edge																																																																									
	U-NII-1_5.25-5.35_802.11n HT20_CH36_5180MHz																																																																									
ANT	1+2																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5149.40</td><td>59.14</td><td>74.00</td><td>-14.86</td><td>44.98</td><td>35.70</td><td>11.09</td><td>32.63</td><td>104 170 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5149.40	59.14	74.00	-14.86	44.98	35.70	11.09	32.63	104 170 PEAK	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5180.00</td><td>106.14</td><td>-----</td><td>-----</td><td>91.96</td><td>35.74</td><td>11.07</td><td>32.63</td><td>104 170 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5180.00	106.14	-----	-----	91.96	35.74	11.07	32.63	104 170 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5149.40	59.14	74.00	-14.86	44.98	35.70	11.09	32.63	104 170 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5180.00	106.14	-----	-----	91.96	35.74	11.07	32.63	104 170 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5149.94</td><td>48.70</td><td>54.00</td><td>-5.30</td><td>34.54</td><td>35.70</td><td>11.09</td><td>32.63</td><td>104 170 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5149.94	48.70	54.00	-5.30	34.54	35.70	11.09	32.63	104 170 AVERAGE	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5180.00</td><td>99.32</td><td>-----</td><td>-----</td><td>85.12</td><td>35.78</td><td>11.06</td><td>32.64</td><td>104 170 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5180.00	99.32	-----	-----	85.12	35.78	11.06	32.64	104 170 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5149.94	48.70	54.00	-5.30	34.54	35.70	11.09	32.63	104 170 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5180.00	99.32	-----	-----	85.12	35.78	11.06	32.64	104 170 AVERAGE																																																																		

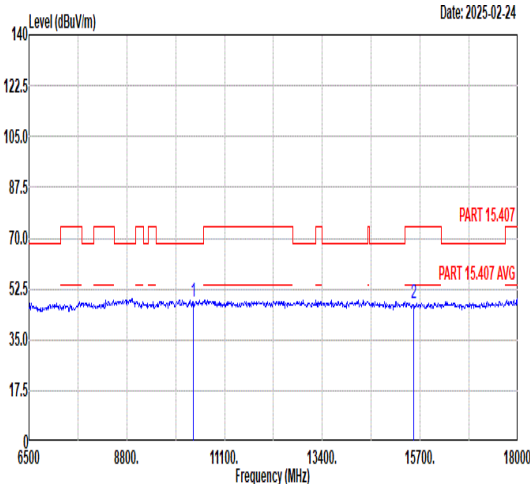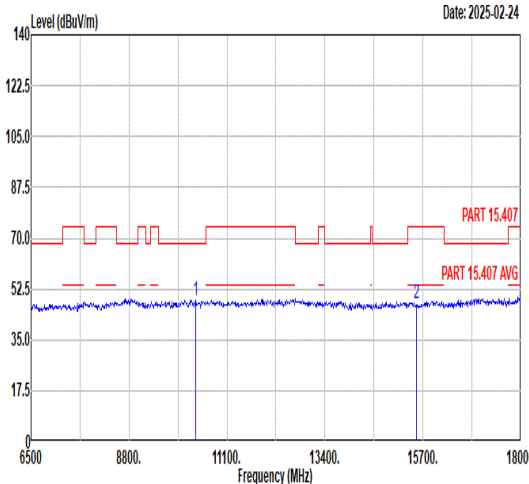

Mode	10																																																																																																															
	Harmonic																																																																																																															
	U-NII-1_5.25-5.35_802.11n HT20_CH36_5180MHz																																																																																																															
ANT	1+2																																																																																																															
Pol.	Horizontal					Vertical																																																																																																										
Peak Avg																																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10360.00</td><td>48.07</td><td>68.30</td><td>-20.23</td><td>47.25</td><td>38.10</td><td>14.15</td><td>51.43</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.55</td><td>74.00</td><td>-26.45</td><td>42.29</td><td>40.60</td><td>16.85</td><td>52.19</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	48.07	68.30	-20.23	47.25	38.10	14.15	51.43	---	Peak	2	15540.00	47.55	74.00	-26.45	42.29	40.60	16.85	52.19	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10360.00</td><td>48.41</td><td>68.30</td><td>-19.89</td><td>47.59</td><td>38.10</td><td>14.15</td><td>51.43</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.74</td><td>74.00</td><td>-26.26</td><td>42.48</td><td>40.60</td><td>16.85</td><td>52.19</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	48.41	68.30	-19.89	47.59	38.10	14.15	51.43	---	Peak	2	15540.00	47.74	74.00	-26.26	42.48	40.60	16.85	52.19	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10360.00	48.07	68.30	-20.23	47.25	38.10	14.15	51.43	---	Peak																																																																																																						
2	15540.00	47.55	74.00	-26.45	42.29	40.60	16.85	52.19	---	Peak																																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10360.00	48.41	68.30	-19.89	47.59	38.10	14.15	51.43	---	Peak																																																																																																						
2	15540.00	47.74	74.00	-26.26	42.48	40.60	16.85	52.19	---	Peak																																																																																																						





Mode	11																																																														
	Harmonic																																																														
	U-NII-1_5.25-5.35_802.11n HT20_CH44_5220MHz																																																														
ANT	1+2																																																														
Pol.	Horizontal																																																														
Peak Avg	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz)																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>48.00</td><td>68.30</td><td>-20.30</td><td>47.07</td><td>38.14</td><td>14.20</td><td>51.41</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.12</td><td>74.00</td><td>-26.88</td><td>42.03</td><td>40.60</td><td>16.94</td><td>52.45</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10440.00	48.00	68.30	-20.30	47.07	38.14	14.20	51.41	---	---	Peak	2	15660.00	47.12	74.00	-26.88	42.03	40.60	16.94	52.45	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																						
1	10440.00	48.00	68.30	-20.30	47.07	38.14	14.20	51.41	---	---	Peak																																																				
2	15660.00	47.12	74.00	-26.88	42.03	40.60	16.94	52.45	---	---	Peak																																																				
Vertical	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz)																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>49.22</td><td>68.30</td><td>-19.08</td><td>48.29</td><td>38.14</td><td>14.20</td><td>51.41</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.28</td><td>74.00</td><td>-26.72</td><td>42.19</td><td>40.60</td><td>16.94</td><td>52.45</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10440.00	49.22	68.30	-19.08	48.29	38.14	14.20	51.41	---	---	Peak	2	15660.00	47.28	74.00	-26.72	42.19	40.60	16.94	52.45	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																						
1	10440.00	49.22	68.30	-19.08	48.29	38.14	14.20	51.41	---	---	Peak																																																				
2	15660.00	47.28	74.00	-26.72	42.19	40.60	16.94	52.45	---	---	Peak																																																				





Mode	12																																																																	
	Harmonic																																																																	
	U-NII-1_5.25-5.35_802.11n HT20_CH48_5240MHz																																																																	
ANT	1+2																																																																	
Pol.	Horizontal	Vertical																																																																
Peak Avg	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10480.00</td><td>48.48</td><td>68.30</td><td>-19.82</td><td>47.47</td><td>38.18</td><td>14.23</td></tr><tr><td>2</td><td>15720.00</td><td>47.83</td><td>74.00</td><td>-26.17</td><td>42.80</td><td>40.62</td><td>16.99</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10480.00	48.48	68.30	-19.82	47.47	38.18	14.23	2	15720.00	47.83	74.00	-26.17	42.80	40.62	16.99	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10480.00</td><td>48.40</td><td>68.30</td><td>-19.90</td><td>47.39</td><td>38.18</td><td>14.23</td></tr><tr><td>2</td><td>15720.00</td><td>47.22</td><td>74.00</td><td>-26.78</td><td>42.19</td><td>40.62</td><td>16.99</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10480.00	48.40	68.30	-19.90	47.39	38.18	14.23	2	15720.00	47.22	74.00	-26.78	42.19	40.62	16.99
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																										
1	10480.00	48.48	68.30	-19.82	47.47	38.18	14.23																																																											
2	15720.00	47.83	74.00	-26.17	42.80	40.62	16.99																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																											
1	10480.00	48.40	68.30	-19.90	47.39	38.18	14.23																																																											
2	15720.00	47.22	74.00	-26.78	42.19	40.62	16.99																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10480.00</td><td>48.48</td><td>68.30</td><td>-19.82</td><td>47.47</td><td>38.18</td><td>14.23</td></tr><tr><td>2</td><td>15720.00</td><td>47.83</td><td>74.00</td><td>-26.17</td><td>42.80</td><td>40.62</td><td>16.99</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10480.00	48.48	68.30	-19.82	47.47	38.18	14.23	2	15720.00	47.83	74.00	-26.17	42.80	40.62	16.99	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10480.00</td><td>48.40</td><td>68.30</td><td>-19.90</td><td>47.39</td><td>38.18</td><td>14.23</td></tr><tr><td>2</td><td>15720.00</td><td>47.22</td><td>74.00</td><td>-26.78</td><td>42.19</td><td>40.62</td><td>16.99</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10480.00	48.40	68.30	-19.90	47.39	38.18	14.23	2	15720.00	47.22	74.00	-26.78	42.19	40.62	16.99
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																											
1	10480.00	48.48	68.30	-19.82	47.47	38.18	14.23																																																											
2	15720.00	47.83	74.00	-26.17	42.80	40.62	16.99																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																											
1	10480.00	48.40	68.30	-19.90	47.39	38.18	14.23																																																											
2	15720.00	47.22	74.00	-26.78	42.19	40.62	16.99																																																											



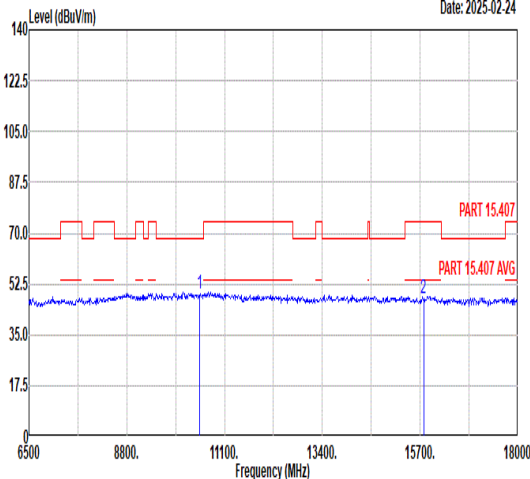
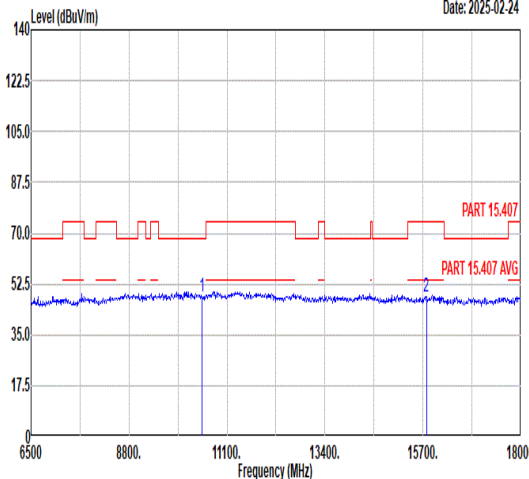


Mode	13																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz																																																																																																																			
ANT	1+2																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10520.00</td><td>49.18</td><td>68.30</td><td>-19.12</td><td>48.11</td><td>38.20</td><td>14.25</td><td>51.38</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.78</td><td>74.00</td><td>-26.22</td><td>42.78</td><td>40.68</td><td>17.04</td><td>52.72</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	49.18	68.30	-19.12	48.11	38.20	14.25	51.38	---	---	Peak	2	15780.00	47.78	74.00	-26.22	42.78	40.68	17.04	52.72	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10520.00</td><td>48.15</td><td>68.30</td><td>-20.15</td><td>47.08</td><td>38.20</td><td>14.25</td><td>51.38</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.96</td><td>74.00</td><td>-26.04</td><td>42.96</td><td>40.68</td><td>17.04</td><td>52.72</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	48.15	68.30	-20.15	47.08	38.20	14.25	51.38	---	---	Peak	2	15780.00	47.96	74.00	-26.04	42.96	40.68	17.04	52.72	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10520.00	49.18	68.30	-19.12	48.11	38.20	14.25	51.38	---	---	Peak																																																																																																									
2	15780.00	47.78	74.00	-26.22	42.78	40.68	17.04	52.72	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10520.00	48.15	68.30	-20.15	47.08	38.20	14.25	51.38	---	---	Peak																																																																																																									
2	15780.00	47.96	74.00	-26.04	42.96	40.68	17.04	52.72	---	---	Peak																																																																																																									

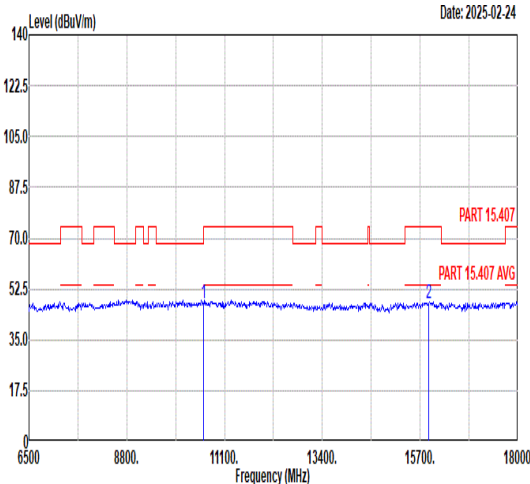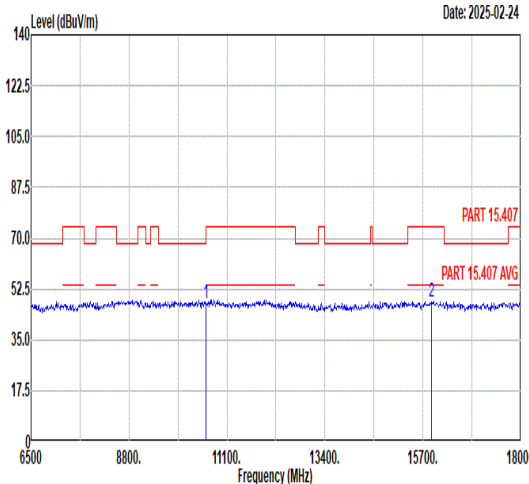

Mode	14																																																																																																																							
	Harmonic																																																																																																																							
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz																																																																																																																							
ANT	1+2																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg																																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10600.00</td><td>47.76</td><td>74.00</td><td>-26.24</td><td>46.56</td><td>38.20</td><td>14.30</td><td>51.30</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>47.73</td><td>74.00</td><td>-26.27</td><td>42.67</td><td>40.90</td><td>17.14</td><td>52.98</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	47.76	74.00	-26.24	46.56	38.20	14.30	51.30	---	---	Peak	2	15900.00	47.73	74.00	-26.27	42.67	40.90	17.14	52.98	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10600.00</td><td>47.63</td><td>74.00</td><td>-26.37</td><td>46.43</td><td>38.20</td><td>14.30</td><td>51.30</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>47.91</td><td>74.00</td><td>-26.09</td><td>42.85</td><td>40.90</td><td>17.14</td><td>52.98</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	47.63	74.00	-26.37	46.43	38.20	14.30	51.30	---	---	Peak	2	15900.00	47.91	74.00	-26.09	42.85	40.90	17.14	52.98	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	10600.00	47.76	74.00	-26.24	46.56	38.20	14.30	51.30	---	---	Peak																																																																																																													
2	15900.00	47.73	74.00	-26.27	42.67	40.90	17.14	52.98	---	---	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	10600.00	47.63	74.00	-26.37	46.43	38.20	14.30	51.30	---	---	Peak																																																																																																													
2	15900.00	47.91	74.00	-26.09	42.85	40.90	17.14	52.98	---	---	Peak																																																																																																													

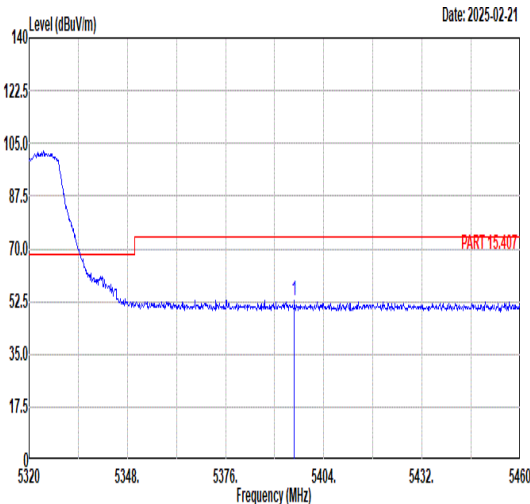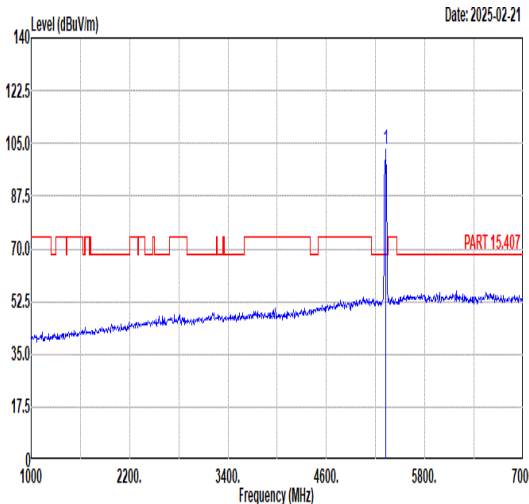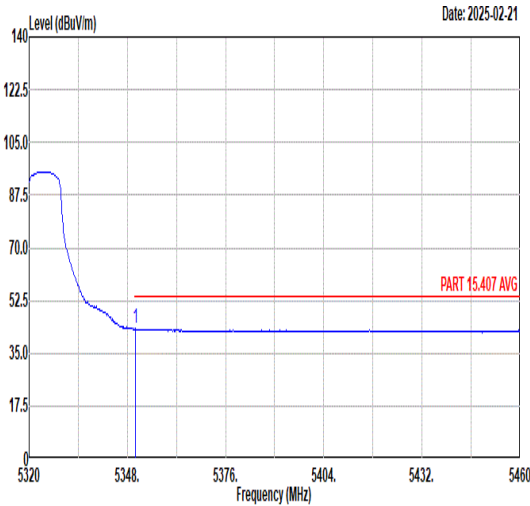
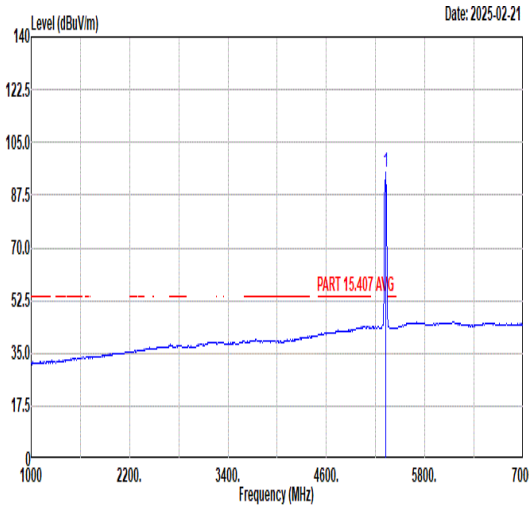


		15																																																																																		
Mode		Band Edge																																																																																		
		U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																		
ANT		1+2																																																																																		
Pol.		Horizontal					Fundamental																																																																													
Peak	 Level (dBuV/m) Date: 2025-02-21 105.0 87.5 70.0 52.5 35.0 17.5 0 5320 5348. 5376. 5404. 5432. 5460 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5395.60</td><td>52.84</td><td>74.00</td><td>-21.16</td><td>38.60</td><td>36.01</td><td>10.91</td><td>32.68</td><td>105 116 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5395.60	52.84	74.00	-21.16	38.60	36.01	10.91	32.68	105 116 PEAK	 Level (dBuV/m) Date: 2025-02-21 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200. 3400. 4600. 5800. 7000 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>102.86</td><td>-----</td><td>-----</td><td>88.61</td><td>35.96</td><td>10.96</td><td>32.67</td><td>105 116 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	102.86	-----	-----	88.61	35.96	10.96	32.67	105 116 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5395.60	52.84	74.00	-21.16	38.60	36.01	10.91	32.68	105 116 PEAK																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5320.00	102.86	-----	-----	88.61	35.96	10.96	32.67	105 116 PEAK																																																																											
Avg	 Level (dBuV/m) Date: 2025-02-21 105.0 87.5 70.0 52.5 35.0 17.5 0 5320 5348. 5376. 5404. 5432. 5460 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.38</td><td>43.07</td><td>54.00</td><td>-10.93</td><td>28.70</td><td>36.10</td><td>10.94</td><td>32.67</td><td>105 116 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.38	43.07	54.00	-10.93	28.70	36.10	10.94	32.67	105 116 AVERAGE	 Level (dBuV/m) Date: 2025-02-21 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200. 3400. 4600. 5800. 7000 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>94.94</td><td>-----</td><td>-----</td><td>80.69</td><td>35.96</td><td>10.96</td><td>32.67</td><td>105 116 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	94.94	-----	-----	80.69	35.96	10.96	32.67	105 116 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5350.38	43.07	54.00	-10.93	28.70	36.10	10.94	32.67	105 116 AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5320.00	94.94	-----	-----	80.69	35.96	10.96	32.67	105 116 AVERAGE																																																																											







Mode	15																																																																																			
	Band Edge																																																																																			
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																			
ANT	1+2																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.94</td><td>58.02</td><td>74.00</td><td>-15.98</td><td>43.65</td><td>36.10</td><td>10.94</td><td>32.67</td><td>172</td><td>174 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.94	58.02	74.00	-15.98	43.65	36.10	10.94	32.67	172	174 PEAK	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>108.44</td><td>-----</td><td>-----</td><td>94.25</td><td>35.88</td><td>10.97</td><td>32.66</td><td>172</td><td>174 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	108.44	-----	-----	94.25	35.88	10.97	32.66	172	174 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5350.94	58.02	74.00	-15.98	43.65	36.10	10.94	32.67	172	174 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5320.00	108.44	-----	-----	94.25	35.88	10.97	32.66	172	174 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.10</td><td>47.50</td><td>54.00</td><td>-6.50</td><td>33.13</td><td>36.10</td><td>10.94</td><td>32.67</td><td>172</td><td>174 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.10	47.50	54.00	-6.50	33.13	36.10	10.94	32.67	172	174 AVERAGE	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>101.82</td><td>-----</td><td>-----</td><td>87.63</td><td>35.88</td><td>10.97</td><td>32.66</td><td>172</td><td>174 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	101.82	-----	-----	87.63	35.88	10.97	32.66	172	174 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5350.10	47.50	54.00	-6.50	33.13	36.10	10.94	32.67	172	174 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5320.00	101.82	-----	-----	87.63	35.88	10.97	32.66	172	174 AVERAGE																																																																										

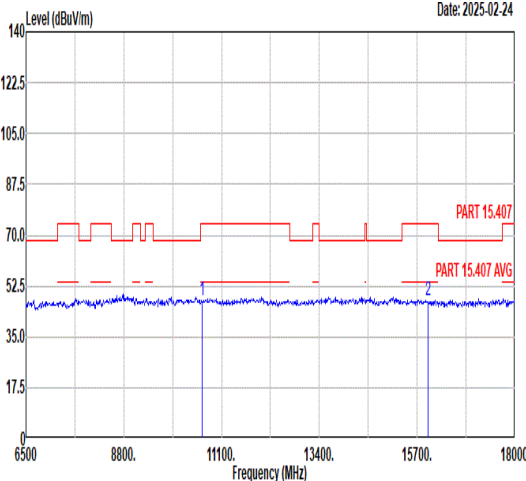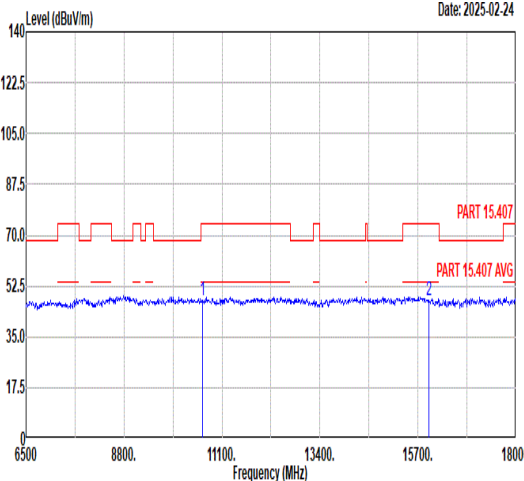

Mode	15																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																																																			
ANT	1+2																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>47.44</td><td>74.00</td><td>-26.56</td><td>46.22</td><td>38.16</td><td>14.32</td><td>51.26</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>47.34</td><td>74.00</td><td>-26.66</td><td>42.24</td><td>41.02</td><td>17.19</td><td>53.11</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	47.44	74.00	-26.56	46.22	38.16	14.32	51.26	---	---	Peak	2	15960.00	47.34	74.00	-26.66	42.24	41.02	17.19	53.11	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>47.67</td><td>74.00</td><td>-26.33</td><td>46.45</td><td>38.16</td><td>14.32</td><td>51.26</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>47.76</td><td>74.00</td><td>-26.24</td><td>42.66</td><td>41.02</td><td>17.19</td><td>53.11</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	47.67	74.00	-26.33	46.45	38.16	14.32	51.26	---	---	Peak	2	15960.00	47.76	74.00	-26.24	42.66	41.02	17.19	53.11	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10640.00	47.44	74.00	-26.56	46.22	38.16	14.32	51.26	---	---	Peak																																																																																																									
2	15960.00	47.34	74.00	-26.66	42.24	41.02	17.19	53.11	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10640.00	47.67	74.00	-26.33	46.45	38.16	14.32	51.26	---	---	Peak																																																																																																									
2	15960.00	47.76	74.00	-26.24	42.66	41.02	17.19	53.11	---	---	Peak																																																																																																									

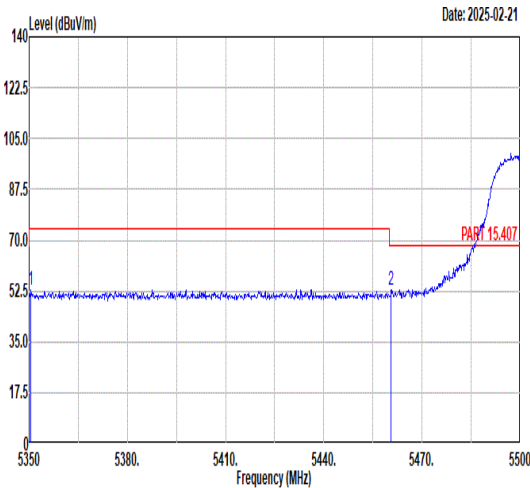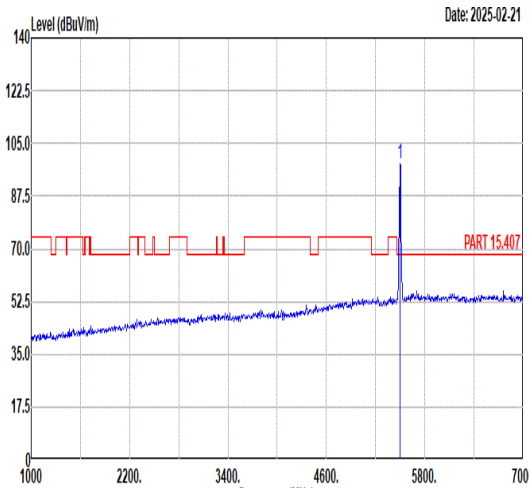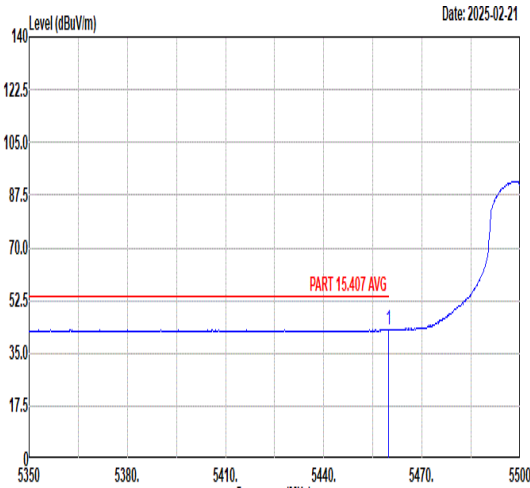
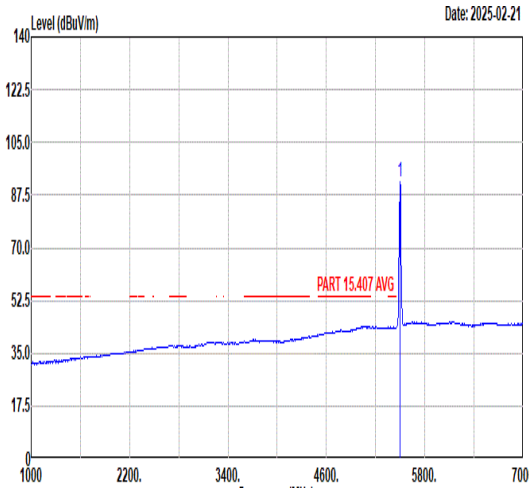


		16																																																																																																		
Mode		Band Edge																																																																																																		
		U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																		
ANT		1+2																																																																																																		
Pol.		Horizontal					Fundamental																																																																																													
Peak	 Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.60</td><td>52.98</td><td>74.00</td><td>-21.02</td><td>38.61</td><td>36.10</td><td>10.94</td><td>32.67</td><td>109</td><td>113</td><td>PEAK</td></tr><tr><td>2</td><td>5460.55</td><td>52.83</td><td>68.30</td><td>-15.47</td><td>38.46</td><td>35.94</td><td>11.12</td><td>32.69</td><td>109</td><td>113</td><td>PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.60	52.98	74.00	-21.02	38.61	36.10	10.94	32.67	109	113	PEAK	2	5460.55	52.83	68.30	-15.47	38.46	35.94	11.12	32.69	109	113	PEAK	 Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>98.52</td><td>-----</td><td>-----</td><td>83.83</td><td>36.10</td><td>11.29</td><td>32.70</td><td>109</td><td>113</td><td>PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	98.52	-----	-----	83.83	36.10	11.29	32.70	109	113	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5350.60	52.98	74.00	-21.02	38.61	36.10	10.94	32.67	109	113	PEAK																																																																																									
2	5460.55	52.83	68.30	-15.47	38.46	35.94	11.12	32.69	109	113	PEAK																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	98.52	-----	-----	83.83	36.10	11.29	32.70	109	113	PEAK																																																																																									
Avg	 Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.80</td><td>42.91</td><td>54.00</td><td>-11.09</td><td>28.54</td><td>35.94</td><td>11.12</td><td>32.69</td><td>109</td><td>113</td><td>AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.80	42.91	54.00	-11.09	28.54	35.94	11.12	32.69	109	113	AVERAGE	 Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>91.93</td><td>-----</td><td>-----</td><td>77.24</td><td>36.10</td><td>11.29</td><td>32.70</td><td>109</td><td>113</td><td>AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	91.93	-----	-----	77.24	36.10	11.29	32.70	109	113	AVERAGE												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5459.80	42.91	54.00	-11.09	28.54	35.94	11.12	32.69	109	113	AVERAGE																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	91.93	-----	-----	77.24	36.10	11.29	32.70	109	113	AVERAGE																																																																																									





Mode	16																																																								
	Band Edge																																																								
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																								
ANT	1+2																																																								
Pol.	Vertical	Fundamental																																																							
Peak	Level (dBuV/m) Date: 2025-02-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor dB cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5388.40</td><td>53.98</td><td>74.00</td><td>-20.02</td><td>39.73</td><td>36.02</td><td>10.91</td><td>32.68</td><td>386</td><td>172 PEAK</td></tr><tr><td>2</td><td>5470.00</td><td>60.28</td><td>68.30</td><td>-8.02</td><td>45.83</td><td>35.98</td><td>11.16</td><td>32.69</td><td>386</td><td>172 PEAK</td></tr></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5388.40	53.98	74.00	-20.02	39.73	36.02	10.91	32.68	386	172 PEAK	2	5470.00	60.28	68.30	-8.02	45.83	35.98	11.16	32.69	386	172 PEAK	Level (dBuV/m) Date: 2025-02-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor dB cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5500.00</td><td>107.19</td><td>-----</td><td>-----</td><td>92.55</td><td>36.08</td><td>11.26</td><td>32.70</td><td>386</td><td>172 PEAK</td></tr></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	107.19	-----	-----	92.55	36.08	11.26	32.70	386	172 PEAK
		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																															
1	5388.40	53.98	74.00	-20.02	39.73	36.02	10.91	32.68	386	172 PEAK																																															
2	5470.00	60.28	68.30	-8.02	45.83	35.98	11.16	32.69	386	172 PEAK																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																
1	5500.00	107.19	-----	-----	92.55	36.08	11.26	32.70	386	172 PEAK																																															
Avg	Level (dBuV/m) Date: 2025-02-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor dB cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5458.15</td><td>43.67</td><td>54.00</td><td>-10.33</td><td>29.32</td><td>35.93</td><td>11.11</td><td>32.69</td><td>386</td><td>172 AVERAGE</td></tr></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5458.15	43.67	54.00	-10.33	29.32	35.93	11.11	32.69	386	172 AVERAGE	Level (dBuV/m) Date: 2025-02-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor dB cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5500.00</td><td>100.38</td><td>-----</td><td>-----</td><td>85.74</td><td>36.08</td><td>11.26</td><td>32.70</td><td>386</td><td>172 AVERAGE</td></tr></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	100.38	-----	-----	85.74	36.08	11.26	32.70	386	172 AVERAGE											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																
1	5458.15	43.67	54.00	-10.33	29.32	35.93	11.11	32.69	386	172 AVERAGE																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																
1	5500.00	100.38	-----	-----	85.74	36.08	11.26	32.70	386	172 AVERAGE																																															

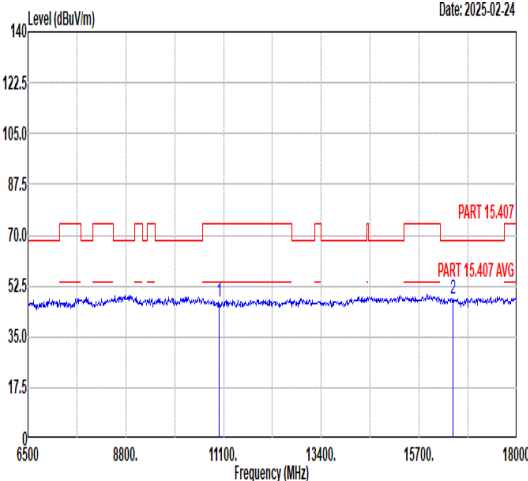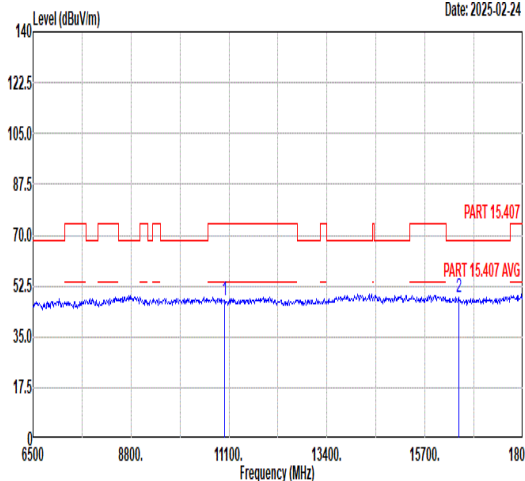

Mode	16																																																																																			
	Harmonic																																																																																			
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																			
ANT	1+2																																																																																			
Pol.	Horizontal						Vertical																																																																													
Peak Avg																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>11000.00</td><td>46.76</td><td>74.00</td><td>-27.24</td><td>45.12</td><td>38.00</td><td>14.54</td><td>50.90</td></tr><tr><td>2</td><td>16500.00</td><td>48.15</td><td>68.30</td><td>-20.15</td><td>42.69</td><td>41.20</td><td>17.36</td><td>53.10</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	11000.00	46.76	74.00	-27.24	45.12	38.00	14.54	50.90	2	16500.00	48.15	68.30	-20.15	42.69	41.20	17.36	53.10	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>11000.00</td><td>47.58</td><td>74.00</td><td>-26.42</td><td>45.94</td><td>38.00</td><td>14.54</td><td>50.90</td></tr><tr><td>2</td><td>16500.00</td><td>48.64</td><td>68.30</td><td>-19.66</td><td>43.18</td><td>41.20</td><td>17.36</td><td>53.10</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	11000.00	47.58	74.00	-26.42	45.94	38.00	14.54	50.90	2	16500.00	48.64	68.30	-19.66	43.18	41.20	17.36	53.10
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
1	11000.00	46.76	74.00	-27.24	45.12	38.00	14.54	50.90																																																																												
2	16500.00	48.15	68.30	-20.15	42.69	41.20	17.36	53.10																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
1	11000.00	47.58	74.00	-26.42	45.94	38.00	14.54	50.90																																																																												
2	16500.00	48.64	68.30	-19.66	43.18	41.20	17.36	53.10																																																																												
<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>11000.00</td><td>46.76</td><td>74.00</td><td>-27.24</td><td>45.12</td><td>38.00</td><td>14.54</td><td>50.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.15</td><td>68.30</td><td>-20.15</td><td>42.69</td><td>41.20</td><td>17.36</td><td>53.10</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11000.00	46.76	74.00	-27.24	45.12	38.00	14.54	50.90	---	---	Peak	2	16500.00	48.15	68.30	-20.15	42.69	41.20	17.36	53.10	---	---	Peak	<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>11000.00</td><td>47.58</td><td>74.00</td><td>-26.42</td><td>45.94</td><td>38.00</td><td>14.54</td><td>50.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.64</td><td>68.30</td><td>-19.66</td><td>43.18</td><td>41.20</td><td>17.36</td><td>53.10</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11000.00	47.58	74.00	-26.42	45.94	38.00	14.54	50.90	---	---	Peak	2	16500.00	48.64	68.30	-19.66	43.18	41.20	17.36	53.10	---	---	Peak	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	11000.00	46.76	74.00	-27.24	45.12	38.00	14.54	50.90	---	---	Peak																																																																									
2	16500.00	48.15	68.30	-20.15	42.69	41.20	17.36	53.10	---	---	Peak																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	11000.00	47.58	74.00	-26.42	45.94	38.00	14.54	50.90	---	---	Peak																																																																									
2	16500.00	48.64	68.30	-19.66	43.18	41.20	17.36	53.10	---	---	Peak																																																																									


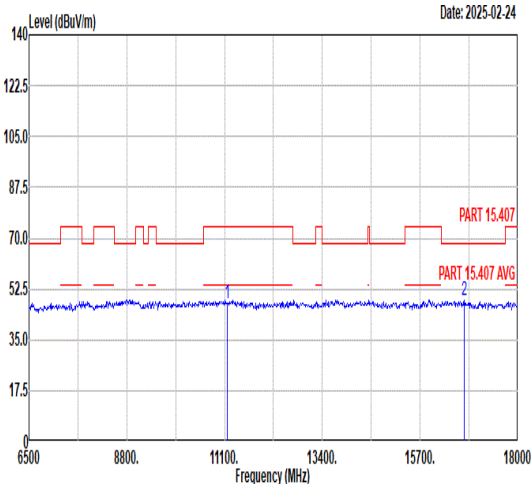
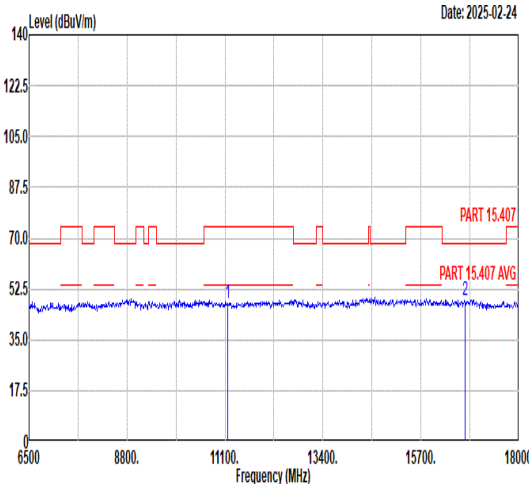


Mode	17																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																																			
ANT	1+2																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>47.64</td><td>74.00</td><td>-26.36</td><td>45.65</td><td>38.06</td><td>14.64</td><td>50.71</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>48.35</td><td>68.30</td><td>-19.95</td><td>42.29</td><td>41.44</td><td>17.43</td><td>52.81</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	47.64	74.00	-26.36	45.65	38.06	14.64	50.71	---	---	Peak	2	16740.00	48.35	68.30	-19.95	42.29	41.44	17.43	52.81	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>47.41</td><td>74.00</td><td>-26.59</td><td>45.42</td><td>38.06</td><td>14.64</td><td>50.71</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>48.83</td><td>68.30</td><td>-19.47</td><td>42.77</td><td>41.44</td><td>17.43</td><td>52.81</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	47.41	74.00	-26.59	45.42	38.06	14.64	50.71	---	---	Peak	2	16740.00	48.83	68.30	-19.47	42.77	41.44	17.43	52.81	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	11160.00	47.64	74.00	-26.36	45.65	38.06	14.64	50.71	---	---	Peak																																																																																																									
2	16740.00	48.35	68.30	-19.95	42.29	41.44	17.43	52.81	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	11160.00	47.41	74.00	-26.59	45.42	38.06	14.64	50.71	---	---	Peak																																																																																																									
2	16740.00	48.83	68.30	-19.47	42.77	41.44	17.43	52.81	---	---	Peak																																																																																																									



Mode	18																																																																																			
	Band Edge																																																																																			
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																			
ANT	1+2																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5726.75</td><td>55.67</td><td>68.30</td><td>-12.63</td><td>40.16</td><td>36.65</td><td>11.65</td><td>32.79</td><td>391</td><td>126 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5726.75	55.67	68.30	-12.63	40.16	36.65	11.65	32.79	391	126 PEAK	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>104.98</td><td>-----</td><td>-----</td><td>89.50</td><td>36.59</td><td>11.67</td><td>32.78</td><td>391</td><td>127 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	104.98	-----	-----	89.50	36.59	11.67	32.78	391	127 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5726.75	55.67	68.30	-12.63	40.16	36.65	11.65	32.79	391	126 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	104.98	-----	-----	89.50	36.59	11.67	32.78	391	127 PEAK																																																																										
Avg	Blank	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>97.86</td><td>-----</td><td>-----</td><td>82.38</td><td>36.59</td><td>11.67</td><td>32.78</td><td>391</td><td>126 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	97.86	-----	-----	82.38	36.59	11.67	32.78	391	126 AVERAGE																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	97.86	-----	-----	82.38	36.59	11.67	32.78	391	126 AVERAGE																																																																										


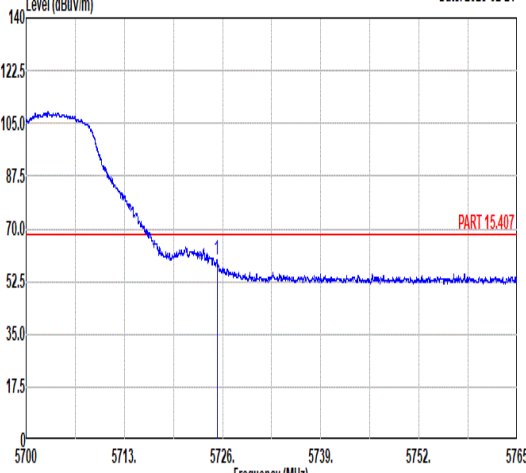
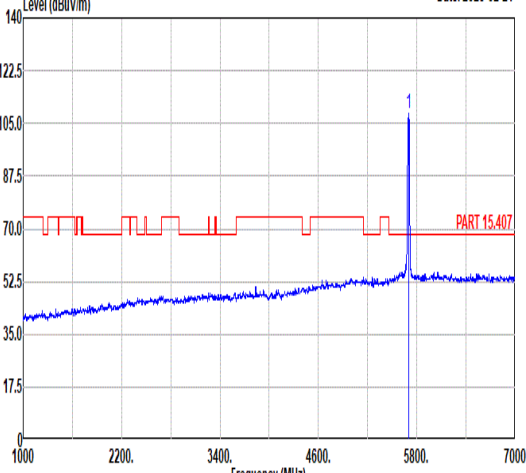
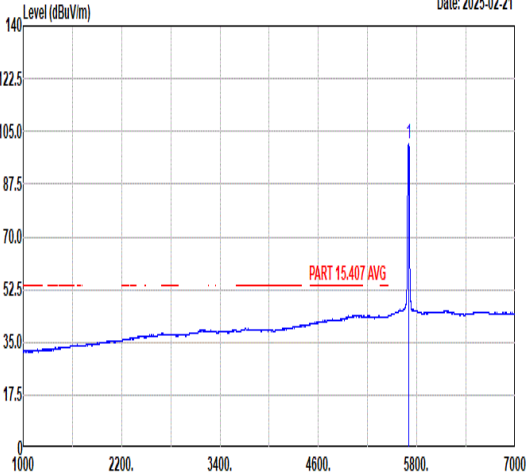


Mode	18																																																																																		
	Band Edge																																																																																		
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																		
ANT	1+2																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	Level (dBuV/m) Date: 2025-02-21  1 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.26</td><td>59.46</td><td>68.30</td><td>-8.84</td><td>43.95</td><td>36.65</td><td>11.65</td><td>32.79</td><td>156</td><td>146 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5725.26	59.46	68.30	-8.84	43.95	36.65	11.65	32.79	156	146 PEAK	Level (dBuV/m) Date: 2025-02-21  1 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>108.17</td><td>-----</td><td>92.69</td><td>36.60</td><td>11.66</td><td>32.78</td><td>156</td><td>146 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	108.17	-----	92.69	36.60	11.66	32.78	156	146 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5725.26	59.46	68.30	-8.84	43.95	36.65	11.65	32.79	156	146 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5700.00	108.17	-----	92.69	36.60	11.66	32.78	156	146 PEAK																																																																										
Avg	Blank	Level (dBuV/m) Date: 2025-02-21  1 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>101.16</td><td>-----</td><td>85.68</td><td>36.60</td><td>11.66</td><td>32.78</td><td>156</td><td>146 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	101.16	-----	85.68	36.60	11.66	32.78	156	146 AVERAGE																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5700.00	101.16	-----	85.68	36.60	11.66	32.78	156	146 AVERAGE																																																																										



Mode	18																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																															
ANT	1+2																																																																																															
Pol.	Horizontal												Vertical																																																																																			
Peak Avg	Date: 2025-02-24												Date: 2025-02-24																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11400.00</td><td>47.75</td><td>74.00</td><td>-26.25</td><td>45.19</td><td>38.20</td><td>14.78</td></tr><tr><td>2</td><td>17100.00</td><td>48.32</td><td>68.30</td><td>-19.98</td><td>40.51</td><td>43.00</td><td>17.53</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	11400.00	47.75	74.00	-26.25	45.19	38.20	14.78	2	17100.00	48.32	68.30	-19.98	40.51	43.00	17.53	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11400.00</td><td>47.51</td><td>74.00</td><td>-26.49</td><td>44.95</td><td>38.20</td><td>14.78</td></tr><tr><td>2</td><td>17100.00</td><td>48.14</td><td>68.30</td><td>-20.16</td><td>40.33</td><td>43.00</td><td>17.53</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	11400.00	47.51	74.00	-26.49	44.95	38.20	14.78	2	17100.00	48.14	68.30	-20.16	40.33	43.00	17.53
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	11400.00	47.75	74.00	-26.25	45.19	38.20	14.78																																																																																									
2	17100.00	48.32	68.30	-19.98	40.51	43.00	17.53																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	11400.00	47.51	74.00	-26.49	44.95	38.20	14.78																																																																																									
2	17100.00	48.14	68.30	-20.16	40.33	43.00	17.53																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11400.00</td><td>47.75</td><td>74.00</td><td>-26.25</td><td>45.19</td><td>38.20</td><td>14.78</td></tr><tr><td>2</td><td>17100.00</td><td>48.32</td><td>68.30</td><td>-19.98</td><td>40.51</td><td>43.00</td><td>17.53</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	11400.00	47.75	74.00	-26.25	45.19	38.20	14.78	2	17100.00	48.32	68.30	-19.98	40.51	43.00	17.53	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11400.00</td><td>47.51</td><td>74.00</td><td>-26.49</td><td>44.95</td><td>38.20</td><td>14.78</td></tr><tr><td>2</td><td>17100.00</td><td>48.14</td><td>68.30</td><td>-20.16</td><td>40.33</td><td>43.00</td><td>17.53</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	11400.00	47.51	74.00	-26.49	44.95	38.20	14.78	2	17100.00	48.14	68.30	-20.16	40.33	43.00	17.53	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	11400.00	47.75	74.00	-26.25	45.19	38.20	14.78																																																																																									
2	17100.00	48.32	68.30	-19.98	40.51	43.00	17.53																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	11400.00	47.51	74.00	-26.49	44.95	38.20	14.78																																																																																									
2	17100.00	48.14	68.30	-20.16	40.33	43.00	17.53																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11400.00</td><td>47.75</td><td>74.00</td><td>-26.25</td><td>45.19</td><td>38.20</td><td>14.78</td></tr><tr><td>2</td><td>17100.00</td><td>48.32</td><td>68.30</td><td>-19.98</td><td>40.51</td><td>43.00</td><td>17.53</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	11400.00	47.75	74.00	-26.25	45.19	38.20	14.78	2	17100.00	48.32	68.30	-19.98	40.51	43.00	17.53	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11400.00</td><td>47.51</td><td>74.00</td><td>-26.49</td><td>44.95</td><td>38.20</td><td>14.78</td></tr><tr><td>2</td><td>17100.00</td><td>48.14</td><td>68.30</td><td>-20.16</td><td>40.33</td><td>43.00</td><td>17.53</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	11400.00	47.51	74.00	-26.49	44.95	38.20	14.78	2	17100.00	48.14	68.30	-20.16	40.33	43.00	17.53	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	11400.00	47.75	74.00	-26.25	45.19	38.20	14.78																																																																																									
2	17100.00	48.32	68.30	-19.98	40.51	43.00	17.53																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	11400.00	47.51	74.00	-26.49	44.95	38.20	14.78																																																																																									
2	17100.00	48.14	68.30	-20.16	40.33	43.00	17.53																																																																																									

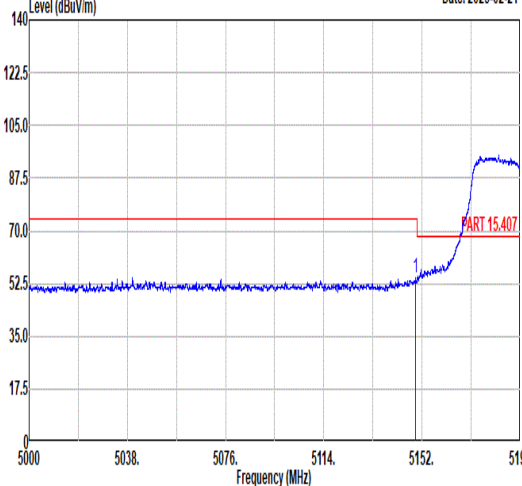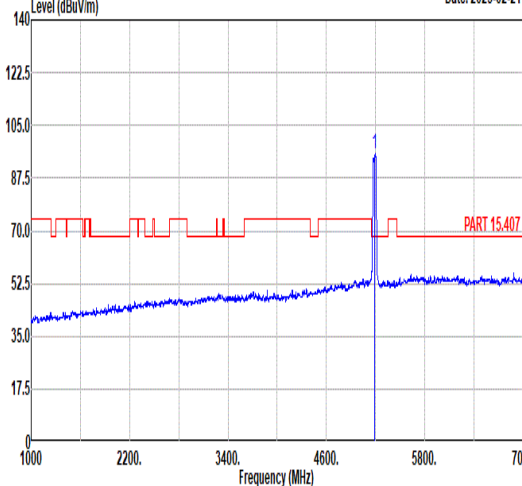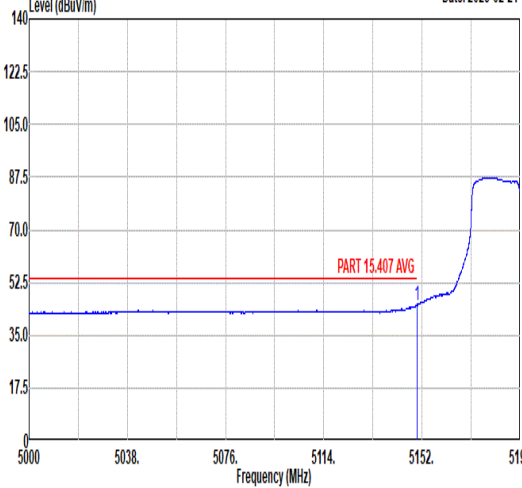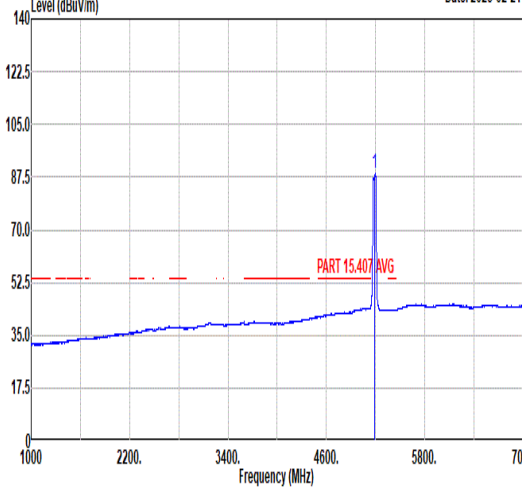

		19																																																																																						
Mode		Band Edge - L																																																																																						
		U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																																						
ANT		1+2																																																																																						
Pol.		Horizontal					Fundamental																																																																																	
Peak	Level (dBuV/m) Date: 2025-02-21  Frequency (MHz)					Level (dBuV/m) Date: 2025-02-21  Frequency (MHz)																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.44</td><td>54.60</td><td>74.00</td><td>-19.40</td><td>40.44</td><td>35.70</td><td>11.09</td><td>32.63</td><td>158 109 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.44	54.60	74.00	-19.40	40.44	35.70	11.09	32.63	158 109 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>95.74</td><td>-----</td><td>81.53</td><td>35.79</td><td>11.06</td><td>32.64</td><td>158 109 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	95.74	-----	81.53	35.79	11.06	32.64
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5149.44	54.60	74.00	-19.40	40.44	35.70	11.09	32.63	158 109 PEAK																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5190.00	95.74	-----	81.53	35.79	11.06	32.64	158 109 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-02-21  Frequency (MHz)					Level (dBuV/m) Date: 2025-02-21  Frequency (MHz)																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.97</td><td>44.89</td><td>54.00</td><td>-9.11</td><td>30.74</td><td>35.70</td><td>11.08</td><td>32.63</td><td>158 109 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.97	44.89	54.00	-9.11	30.74	35.70	11.08	32.63	158 109 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>88.62</td><td>-----</td><td>74.41</td><td>35.79</td><td>11.06</td><td>32.64</td><td>158 109 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	88.62	-----	74.41	35.79	11.06	32.64
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5149.97	44.89	54.00	-9.11	30.74	35.70	11.08	32.63	158 109 AVERAGE																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5190.00	88.62	-----	74.41	35.79	11.06	32.64	158 109 AVERAGE																																																																																



Mode	19																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																									
ANT	1+2																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.09</td><td>52.97</td><td>74.00</td><td>-21.03</td><td>38.64</td><td>35.92</td><td>11.10</td><td>32.69</td><td>158 109 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5456.09	52.97	74.00	-21.03	38.64	35.92	11.10	32.69	158 109 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5456.09	52.97	74.00	-21.03	38.64	35.92	11.10	32.69	158 109 PEAK																																	
Avg	Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5359.97</td><td>42.77</td><td>54.00</td><td>-11.23</td><td>28.42</td><td>36.08</td><td>10.94</td><td>32.67</td><td>158 109 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5359.97	42.77	54.00	-11.23	28.42	36.08	10.94	32.67	158 109 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5359.97	42.77	54.00	-11.23	28.42	36.08	10.94	32.67	158 109 AVERAGE																																	



Mode	19																																									
	Band Edge - L																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																									
ANT	1+2																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-02-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5149.44</td><td>59.60</td><td>74.00</td><td>-14.40</td><td>45.44</td><td>35.70</td><td>11.09</td><td>32.63</td><td>165</td><td>174 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5149.44	59.60	74.00	-14.40	45.44	35.70	11.09	32.63	165	174 PEAK	Level (dBuV/m) Date: 2025-02-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5190.00</td><td>99.56</td><td>-----</td><td>-----</td><td>85.36</td><td>35.78</td><td>11.06</td><td>32.64</td><td>165</td><td>174 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5190.00	99.56	-----	-----	85.36	35.78	11.06	32.64	165	174 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 5149.44	59.60	74.00	-14.40	45.44	35.70	11.09	32.63	165	174 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 5190.00	99.56	-----	-----	85.36	35.78	11.06	32.64	165	174 PEAK																																	
Avg	Level (dBuV/m) Date: 2025-02-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5149.63</td><td>48.91</td><td>54.00</td><td>-5.09</td><td>34.75</td><td>35.70</td><td>11.09</td><td>32.63</td><td>165</td><td>174 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5149.63	48.91	54.00	-5.09	34.75	35.70	11.09	32.63	165	174 AVERAGE	Level (dBuV/m) Date: 2025-02-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5190.00</td><td>92.70</td><td>-----</td><td>-----</td><td>78.50</td><td>35.77</td><td>11.07</td><td>32.64</td><td>165</td><td>174 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5190.00	92.70	-----	-----	78.50	35.77	11.07	32.64	165	174 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 5149.63	48.91	54.00	-5.09	34.75	35.70	11.09	32.63	165	174 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 5190.00	92.70	-----	-----	78.50	35.77	11.07	32.64	165	174 AVERAGE																																	



Mode	19																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																										
ANT	1+2																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5378.06</td><td>52.40</td><td>74.00</td><td>-21.60</td><td>38.12</td><td>36.04</td><td>10.92</td><td>32.68</td><td>165</td><td>174 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5378.06	52.40	74.00	-21.60	38.12	36.04	10.92	32.68	165	174 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5378.06	52.40	74.00	-21.60	38.12	36.04	10.92	32.68	165	174 PEAK																																	
Avg	Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5356.19</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>28.48</td><td>36.09</td><td>10.94</td><td>32.67</td><td>165</td><td>174 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5356.19	42.84	54.00	-11.16	28.48	36.09	10.94	32.67	165	174 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5356.19	42.84	54.00	-11.16	28.48	36.09	10.94	32.67	165	174 AVERAGE																																	





Mode	19																																																																	
	Harmonic																																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																	
ANT	1+2																																																																	
Pol.	Horizontal	Vertical																																																																
Peak Avg	Level (dBuV/m) Date: 2025-03-11 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><td>1</td><td>10380.00</td><td>47.75</td><td>68.30</td><td>-20.55</td><td>46.91</td><td>38.10</td><td>14.16 51.42 --- --- Peak</td></tr><tr><td>2</td><td>15570.00</td><td>46.04</td><td>74.00</td><td>-27.96</td><td>40.82</td><td>40.60</td><td>16.87 52.25 --- --- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	1	10380.00	47.75	68.30	-20.55	46.91	38.10	14.16 51.42 --- --- Peak	2	15570.00	46.04	74.00	-27.96	40.82	40.60	16.87 52.25 --- --- Peak	Level (dBuV/m) Date: 2025-03-11 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><td>1</td><td>10380.00</td><td>46.72</td><td>68.30</td><td>-21.58</td><td>45.88</td><td>38.10</td><td>14.16 51.42 --- --- Peak</td></tr><tr><td>2</td><td>15570.00</td><td>47.48</td><td>74.00</td><td>-26.52</td><td>42.26</td><td>40.60</td><td>16.87 52.25 --- --- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	1	10380.00	46.72	68.30	-21.58	45.88	38.10	14.16 51.42 --- --- Peak	2	15570.00	47.48	74.00	-26.52	42.26	40.60	16.87 52.25 --- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																										
1	10380.00	47.75	68.30	-20.55	46.91	38.10	14.16 51.42 --- --- Peak																																																											
2	15570.00	46.04	74.00	-27.96	40.82	40.60	16.87 52.25 --- --- Peak																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																											
1	10380.00	46.72	68.30	-21.58	45.88	38.10	14.16 51.42 --- --- Peak																																																											
2	15570.00	47.48	74.00	-26.52	42.26	40.60	16.87 52.25 --- --- Peak																																																											



Mode	20																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.55</td><td>53.91</td><td>74.00</td><td>-20.09</td><td>39.75</td><td>35.70</td><td>11.09</td><td>32.63</td><td>155</td><td>109</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5147.55	53.91	74.00	-20.09	39.75	35.70	11.09	32.63	155	109	PEAK	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>99.76</td><td>-----</td><td>-----</td><td>85.55</td><td>35.80</td><td>11.05</td><td>32.64</td><td>155</td><td>109</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5230.00	99.76	-----	-----	85.55	35.80	11.05	32.64	155	109	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5147.55	53.91	74.00	-20.09	39.75	35.70	11.09	32.63	155	109	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5230.00	99.76	-----	-----	85.55	35.80	11.05	32.64	155	109	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5129.40</td><td>43.45</td><td>54.00</td><td>-10.55</td><td>29.24</td><td>35.74</td><td>11.10</td><td>32.63</td><td>155</td><td>109</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5129.40	43.45	54.00	-10.55	29.24	35.74	11.10	32.63	155	109	AVERAGE	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>92.58</td><td>-----</td><td>-----</td><td>78.37</td><td>35.80</td><td>11.05</td><td>32.64</td><td>155</td><td>109</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5230.00	92.58	-----	-----	78.37	35.80	11.05	32.64	155	109	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5129.40	43.45	54.00	-10.55	29.24	35.74	11.10	32.63	155	109	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5230.00	92.58	-----	-----	78.37	35.80	11.05	32.64	155	109	AVERAGE																																																																							

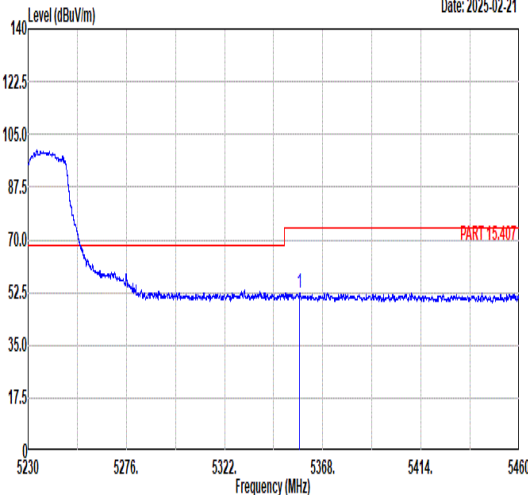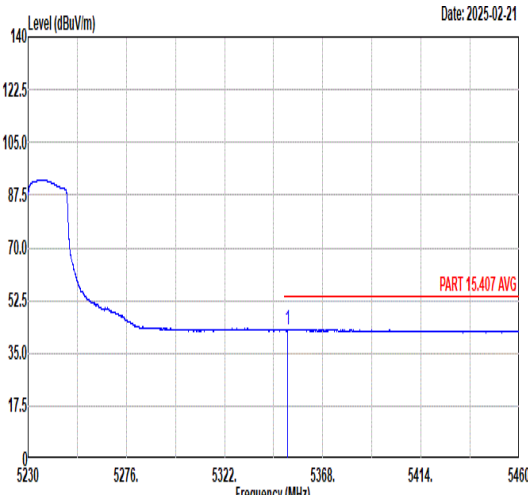

Mode	20																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																										
ANT	1+2																																										
Pol.	Horizontal	Fundamental																																									
Peak	Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5357.24</td><td>52.56</td><td>74.00</td><td>-21.44</td><td>38.20</td><td>36.09</td><td>10.94</td><td>32.67</td><td>155</td><td>109 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5357.24	52.56	74.00	-21.44	38.20	36.09	10.94	32.67	155	109 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																		
1	5357.24	52.56	74.00	-21.44	38.20	36.09	10.94	32.67	155	109 PEAK																																	
Avg	Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.56</td><td>42.93</td><td>54.00</td><td>-11.07</td><td>28.56</td><td>36.10</td><td>10.94</td><td>32.67</td><td>155</td><td>109 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5351.56	42.93	54.00	-11.07	28.56	36.10	10.94	32.67	155	109 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																		
1	5351.56	42.93	54.00	-11.07	28.56	36.10	10.94	32.67	155	109 AVERAGE																																	



		20																																																																										
Mode		Band Edge - L																																																																										
		U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																										
ANT		1+2																																																																										
Pol.		Vertical					Fundamental																																																																					
Peak	Date: 2025-02-21					Date: 2025-02-21																																																																						
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5088.90	53.97	74.00	-20.03	39.67	35.80	11.12	32.62	162 176 PEAK	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5230.00</td><td>103.81</td><td>-----</td><td>-----</td><td>89.62</td><td>35.80</td><td>11.04</td><td>32.65</td><td>162 176 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5230.00	103.81	-----	-----	89.62	35.80	11.04	32.65
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5088.90	53.97	74.00	-20.03	39.67	35.80	11.12	32.62	162 176 PEAK																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5230.00	103.81	-----	-----	89.62	35.80	11.04	32.65	162 176 PEAK																																																																				
Avg	Date: 2025-02-21					Date: 2025-02-21																																																																						
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5126.18	43.88	54.00	-10.12	29.66	35.75	11.10	32.63	162 176 AVERAGE	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5230.00</td><td>97.29</td><td>-----</td><td>-----</td><td>83.10</td><td>35.80</td><td>11.04</td><td>32.65</td><td>162 176 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5230.00	97.29	-----	-----	83.10	35.80	11.04	32.65
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5126.18	43.88	54.00	-10.12	29.66	35.75	11.10	32.63	162 176 AVERAGE																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5230.00	97.29	-----	-----	83.10	35.80	11.04	32.65	162 176 AVERAGE																																																																				



Mode	20																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																									
ANT	1+2																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2025-02-21 Level (dBuV/m) Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5410.90</td><td>53.27</td><td>74.00</td><td>-20.73</td><td>39.05</td><td>35.98</td><td>10.92</td><td>32.68</td><td>162</td><td>176</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5410.90	53.27	74.00	-20.73	39.05	35.98	10.92	32.68	162	176	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																	
1	5410.90	53.27	74.00	-20.73	39.05	35.98	10.92	32.68	162	176	PEAK																															
Avg	Date: 2025-02-21 Level (dBuV/m) Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5354.80</td><td>43.65</td><td>54.00</td><td>-10.35</td><td>29.29</td><td>36.09</td><td>10.94</td><td>32.67</td><td>162</td><td>176</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5354.80	43.65	54.00	-10.35	29.29	36.09	10.94	32.67	162	176	AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																	
1	5354.80	43.65	54.00	-10.35	29.29	36.09	10.94	32.67	162	176	AVERAGE																															



Mode	21																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																									
ANT	1+2																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5037.94</td><td>53.31</td><td>74.00</td><td>-20.69</td><td>38.97</td><td>35.80</td><td>11.15</td><td>32.61</td><td>163 110 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5037.94	53.31	74.00	-20.69	38.97	35.80	11.15	32.61	163 110 PEAK	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5270.00</td><td>99.85</td><td>-----</td><td>-----</td><td>85.69</td><td>35.80</td><td>11.01</td><td>32.65</td><td>163 109 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5270.00	99.85	-----	-----	85.69	35.80	11.01	32.65	163 109 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5037.94	53.31	74.00	-20.69	38.97	35.80	11.15	32.61	163 110 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5270.00	99.85	-----	-----	85.69	35.80	11.01	32.65	163 109 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5101.14</td><td>43.32</td><td>54.00</td><td>-10.68</td><td>29.03</td><td>35.80</td><td>11.11</td><td>32.62</td><td>163 109 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5101.14	43.32	54.00	-10.68	29.03	35.80	11.11	32.62	163 109 AVERAGE	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5270.00</td><td>92.87</td><td>-----</td><td>-----</td><td>78.71</td><td>35.80</td><td>11.01</td><td>32.65</td><td>163 109 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5270.00	92.87	-----	-----	78.71	35.80	11.01	32.65	163 109 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5101.14	43.32	54.00	-10.68	29.03	35.80	11.11	32.62	163 109 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5270.00	92.87	-----	-----	78.71	35.80	11.01	32.65	163 109 AVERAGE																																																																		



Mode	21																																																	
	Band Edge - R																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																	
ANT	1+2																																																	
Pol.	Horizontal					Fundamental																																												
Peak	Date: 2025-02-21 Level (dBuV/m) Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5385.05</td><td>52.95</td><td>74.00</td><td>-21.05</td><td>38.68</td><td>36.03</td><td>10.92</td><td>32.68</td><td>163</td><td>109</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5385.05	52.95	74.00	-21.05	38.68	36.03	10.92	32.68	163	109	PEAK	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																									
1	5385.05	52.95	74.00	-21.05	38.68	36.03	10.92	32.68	163	109	PEAK																																							
Avg	Date: 2025-02-21 Level (dBuV/m) Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5357.69</td><td>43.33</td><td>54.00</td><td>-10.67</td><td>28.98</td><td>36.08</td><td>10.94</td><td>32.67</td><td>163</td><td>109</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5357.69	43.33	54.00	-10.67	28.98	36.08	10.94	32.67	163	109	AVERAGE	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																									
1	5357.69	43.33	54.00	-10.67	28.98	36.08	10.94	32.67	163	109	AVERAGE																																							



		21																																																																																		
Mode		Band Edge - L																																																																																		
		U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																																		
ANT		1+2																																																																																		
Pol.		Vertical					Fundamental																																																																													
Peak																																																																																				
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5137.59	53.82	74.00	-20.18	39.64	35.72	11.09	32.63	160	175 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5270.00	105.75	-----	-----	91.59	35.80	11.01	32.65	160	175 PEAK				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1 5137.59	53.82	74.00	-20.18	39.64	35.72	11.09	32.63	160	175 PEAK																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1 5270.00	105.75	-----	-----	91.59	35.80	11.01	32.65	160	175 PEAK																																																																											
Avg																																																																																				
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5144.34	43.91	54.00	-10.09	29.74	35.71	11.09	32.63	160	175 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5270.00	98.21	-----	-----	84.05	35.80	11.01	32.65	160	175 AVERAGE				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1 5144.34	43.91	54.00	-10.09	29.74	35.71	11.09	32.63	160	175 AVERAGE																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1 5270.00	98.21	-----	-----	84.05	35.80	11.01	32.65	160	175 AVERAGE																																																																											



Mode	21																																								
	Band Edge - R																																								
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																								
ANT	1+2																																								
Pol.	Vertical	Fundamental																																							
Peak	Date: 2025-02-21 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5383.15</td><td>53.97</td><td>74.00</td><td>-20.03</td><td>39.70</td><td>36.03</td><td>10.92</td><td>32.68</td><td>160</td><td>175</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5383.15	53.97	74.00	-20.03	39.70	36.03	10.92	32.68	160	175	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5383.15	53.97	74.00	-20.03	39.70	36.03	10.92	32.68	160	175	PEAK																														
Avg	Date: 2025-02-21 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5356.37</td><td>44.37</td><td>54.00</td><td>-9.63</td><td>30.01</td><td>36.09</td><td>10.94</td><td>32.67</td><td>160</td><td>175</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5356.37	44.37	54.00	-9.63	30.01	36.09	10.94	32.67	160	175	AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5356.37	44.37	54.00	-9.63	30.01	36.09	10.94	32.67	160	175	AVERAGE																														



Mode	22																																																																											
	Band Edge - L																																																																											
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																											
ANT	1+2																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5059.06</td><td>53.00</td><td>74.00</td><td>-21.00</td><td>38.67</td><td>35.80</td><td>11.14</td><td>32.61</td><td>158 108 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5059.06	53.00	74.00	-21.00	38.67	35.80	11.14	32.61	158 108 PEAK	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>98.09</td><td>-----</td><td>-----</td><td>83.97</td><td>35.80</td><td>10.98</td><td>32.66</td><td>158 108 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	98.09	-----	-----	83.97	35.80	10.98	32.66	158 108 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5059.06	53.00	74.00	-21.00	38.67	35.80	11.14	32.61	158 108 PEAK																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5310.00	98.09	-----	-----	83.97	35.80	10.98	32.66	158 108 PEAK																																																																			
Avg	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5108.07</td><td>43.09</td><td>54.00</td><td>-10.91</td><td>28.82</td><td>35.78</td><td>11.11</td><td>32.62</td><td>158 108 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5108.07	43.09	54.00	-10.91	28.82	35.78	11.11	32.62	158 108 AVERAGE	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>90.72</td><td>-----</td><td>-----</td><td>76.57</td><td>35.83</td><td>10.98</td><td>32.66</td><td>158 108 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	90.72	-----	-----	76.57	35.83	10.98	32.66	158 108 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5108.07	43.09	54.00	-10.91	28.82	35.78	11.11	32.62	158 108 AVERAGE																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5310.00	90.72	-----	-----	76.57	35.83	10.98	32.66	158 108 AVERAGE																																																																			



Mode	22																																										
	Band Edge - R																																										
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																										
ANT	1+2																																										
Pol.	Horizontal	Fundamental																																									
Peak	Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.89</td><td>55.08</td><td>74.00</td><td>-18.92</td><td>40.71</td><td>36.10</td><td>10.94</td><td>32.67</td><td>158</td><td>108 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.89	55.08	74.00	-18.92	40.71	36.10	10.94	32.67	158	108 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5350.89	55.08	74.00	-18.92	40.71	36.10	10.94	32.67	158	108 PEAK																																	
Avg	Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.29</td><td>45.64</td><td>54.00</td><td>-8.36</td><td>31.27</td><td>36.10</td><td>10.94</td><td>32.67</td><td>158</td><td>108 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.29	45.64	54.00	-8.36	31.27	36.10	10.94	32.67	158	108 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5350.29	45.64	54.00	-8.36	31.27	36.10	10.94	32.67	158	108 AVERAGE																																	



Mode	22																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																									
ANT	1+2																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5094.74</td><td>53.17</td><td>74.00</td><td>-20.83</td><td>38.87</td><td>35.80</td><td>11.12</td><td>32.62</td><td>169 176 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5094.74	53.17	74.00	-20.83	38.87	35.80	11.12	32.62	169 176 PEAK	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5310.00</td><td>101.81</td><td>-----</td><td>-----</td><td>87.69</td><td>35.80</td><td>10.98</td><td>32.66</td><td>169 176 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	101.81	-----	-----	87.69	35.80	10.98	32.66	169 176 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5094.74	53.17	74.00	-20.83	38.87	35.80	11.12	32.62	169 176 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5310.00	101.81	-----	-----	87.69	35.80	10.98	32.66	169 176 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5121.68</td><td>43.07</td><td>54.00</td><td>-10.93</td><td>28.83</td><td>35.76</td><td>11.10</td><td>32.62</td><td>169 176 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5121.68	43.07	54.00	-10.93	28.83	35.76	11.10	32.62	169 176 AVERAGE	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5310.00</td><td>95.43</td><td>-----</td><td>-----</td><td>81.28</td><td>35.83</td><td>10.98</td><td>32.66</td><td>169 176 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	95.43	-----	-----	81.28	35.83	10.98	32.66	169 176 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5121.68	43.07	54.00	-10.93	28.83	35.76	11.10	32.62	169 176 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5310.00	95.43	-----	-----	81.28	35.83	10.98	32.66	169 176 AVERAGE																																																																		



Mode	23																																																																																													
	Band Edge - L																																																																																													
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																													
ANT	1+2																																																																																													
Pol.	Horizontal	Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5430.56</td><td>52.94</td><td>74.00</td><td>-21.06</td><td>38.69</td><td>35.94</td><td>11.00</td><td>32.69</td><td>384</td><td>130</td><td>PEAK</td></tr><tr><td>2</td><td>5466.56</td><td>53.47</td><td>68.30</td><td>-14.83</td><td>39.04</td><td>35.97</td><td>11.15</td><td>32.69</td><td>384</td><td>130</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5430.56	52.94	74.00	-21.06	38.69	35.94	11.00	32.69	384	130	PEAK	2	5466.56	53.47	68.30	-14.83	39.04	35.97	11.15	32.69	384	130	PEAK	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>97.72</td><td>-----</td><td>-----</td><td>83.10</td><td>36.07</td><td>11.25</td><td>32.70</td><td>384</td><td>130</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5510.00	97.72	-----	-----	83.10	36.07	11.25	32.70	384	130	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5430.56	52.94	74.00	-21.06	38.69	35.94	11.00	32.69	384	130	PEAK																																																																																			
2	5466.56	53.47	68.30	-14.83	39.04	35.97	11.15	32.69	384	130	PEAK																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5510.00	97.72	-----	-----	83.10	36.07	11.25	32.70	384	130	PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5458.88</td><td>43.19</td><td>54.00</td><td>-10.81</td><td>28.82</td><td>35.94</td><td>11.12</td><td>32.69</td><td>384</td><td>130</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5458.88	43.19	54.00	-10.81	28.82	35.94	11.12	32.69	384	130	AVERAGE	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>91.27</td><td>-----</td><td>-----</td><td>76.65</td><td>36.07</td><td>11.25</td><td>32.70</td><td>384</td><td>130</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5510.00	91.27	-----	-----	76.65	36.07	11.25	32.70	384	130	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5458.88	43.19	54.00	-10.81	28.82	35.94	11.12	32.69	384	130	AVERAGE																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5510.00	91.27	-----	-----	76.65	36.07	11.25	32.70	384	130	AVERAGE																																																																																			







Mode	23																																																			
	Band Edge - L																																																			
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																			
ANT	1+2																																																			
Pol.	Vertical	Fundamental																																																		
Peak	Level (dBuV/m) Date: 2025-02-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5460.00</td><td>57.47</td><td>68.30</td><td>-10.83</td><td>43.10</td><td>35.94</td><td>11.12</td><td>32.69</td><td>169</td><td>173 PEAK</td></tr><tr><td>2 5469.46</td><td>60.75</td><td>68.30</td><td>-7.55</td><td>46.30</td><td>35.98</td><td>11.16</td><td>32.69</td><td>169</td><td>173 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5460.00	57.47	68.30	-10.83	43.10	35.94	11.12	32.69	169	173 PEAK	2 5469.46	60.75	68.30	-7.55	46.30	35.98	11.16	32.69	169	173 PEAK	Level (dBuV/m) Date: 2025-02-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5510.00</td><td>105.13</td><td>-----</td><td>-----</td><td>90.33</td><td>36.14</td><td>11.37</td><td>32.71</td><td>169</td><td>173 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5510.00	105.13	-----	-----	90.33	36.14	11.37	32.71	169	173 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																										
1 5460.00	57.47	68.30	-10.83	43.10	35.94	11.12	32.69	169	173 PEAK																																											
2 5469.46	60.75	68.30	-7.55	46.30	35.98	11.16	32.69	169	173 PEAK																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																											
1 5510.00	105.13	-----	-----	90.33	36.14	11.37	32.71	169	173 PEAK																																											
Avg	Level (dBuV/m) Date: 2025-02-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5459.68</td><td>48.04</td><td>54.00</td><td>-5.96</td><td>33.67</td><td>35.94</td><td>11.12</td><td>32.69</td><td>169</td><td>173 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5459.68	48.04	54.00	-5.96	33.67	35.94	11.12	32.69	169	173 AVERAGE	Level (dBuV/m) Date: 2025-02-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5510.00</td><td>97.88</td><td>-----</td><td>-----</td><td>83.08</td><td>36.14</td><td>11.37</td><td>32.71</td><td>169</td><td>173 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5510.00	97.88	-----	-----	83.08	36.14	11.37	32.71	169	173 AVERAGE										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																											
1 5459.68	48.04	54.00	-5.96	33.67	35.94	11.12	32.69	169	173 AVERAGE																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																											
1 5510.00	97.88	-----	-----	83.08	36.14	11.37	32.71	169	173 AVERAGE																																											







Mode	23																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																									
ANT	1+2																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2025-02-21 Level (dBuV/m) Frequency (MHz) PART 15.407 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5731.49</td><td>54.75</td><td>68.30</td><td>-13.55</td><td>39.23</td><td>36.66</td><td>11.65</td><td>32.79</td><td>169</td><td>173</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5731.49	54.75	68.30	-13.55	39.23	36.66	11.65	32.79	169	173	PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5731.49	54.75	68.30	-13.55	39.23	36.66	11.65	32.79	169	173	PEAK																															

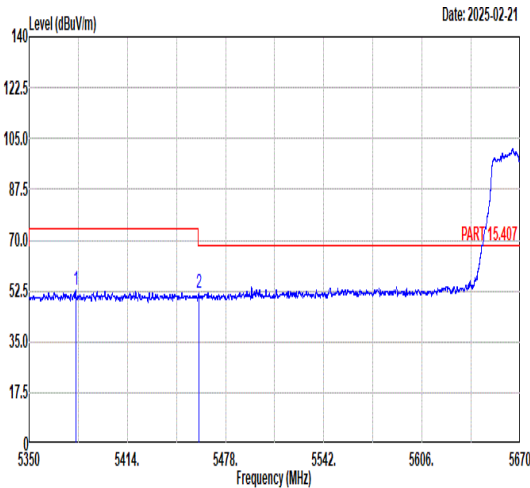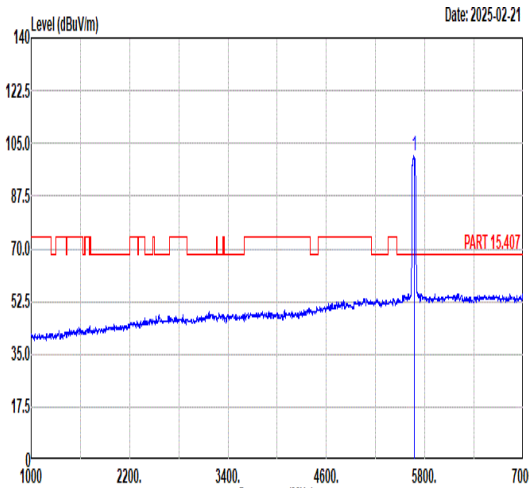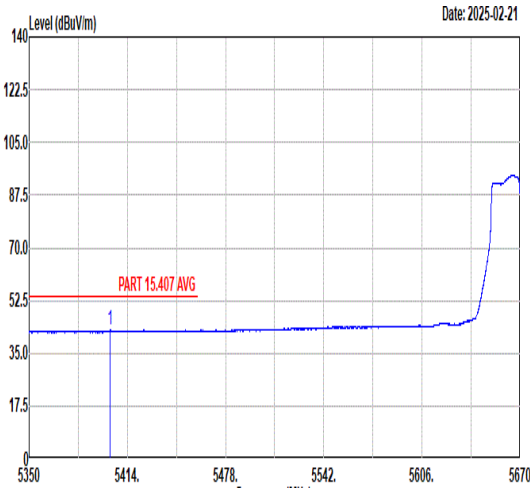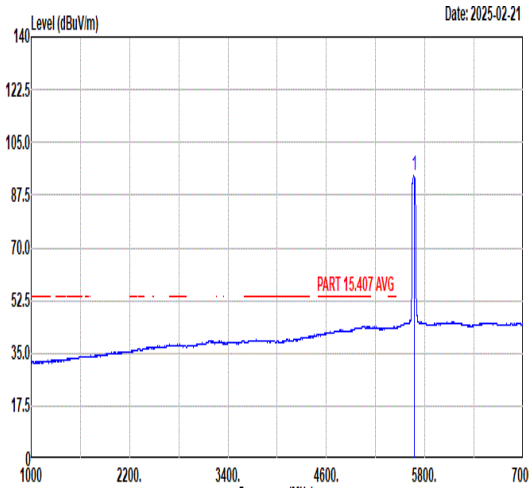

		24																																																																																																		
Mode		Band Edge - L																																																																																																		
		U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																																		
ANT		1+2																																																																																																		
Pol.		Horizontal					Fundamental																																																																																													
Peak	 Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5380.27</td><td>52.73</td><td>74.00</td><td>-21.27</td><td>38.45</td><td>36.04</td><td>10.92</td><td>32.68</td><td>395</td><td>128</td><td>PEAK</td></tr><tr><td>2</td><td>5460.56</td><td>51.95</td><td>68.30</td><td>-16.35</td><td>37.58</td><td>35.94</td><td>11.12</td><td>32.69</td><td>395</td><td>128</td><td>PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5380.27	52.73	74.00	-21.27	38.45	36.04	10.92	32.68	395	128	PEAK	2	5460.56	51.95	68.30	-16.35	37.58	35.94	11.12	32.69	395	128	PEAK	 Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>101.02</td><td>-----</td><td>-----</td><td>85.58</td><td>36.53</td><td>11.68</td><td>32.77</td><td>395</td><td>128</td><td>PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	101.02	-----	-----	85.58	36.53	11.68	32.77	395	128	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5380.27	52.73	74.00	-21.27	38.45	36.04	10.92	32.68	395	128	PEAK																																																																																									
2	5460.56	51.95	68.30	-16.35	37.58	35.94	11.12	32.69	395	128	PEAK																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5670.00	101.02	-----	-----	85.58	36.53	11.68	32.77	395	128	PEAK																																																																																									
Avg	 Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5402.96</td><td>42.65</td><td>54.00</td><td>-11.35</td><td>28.44</td><td>35.99</td><td>10.90</td><td>32.68</td><td>395</td><td>128</td><td>AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5402.96	42.65	54.00	-11.35	28.44	35.99	10.90	32.68	395	128	AVERAGE	 Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>93.95</td><td>-----</td><td>-----</td><td>78.51</td><td>36.53</td><td>11.68</td><td>32.77</td><td>395</td><td>128</td><td>AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	93.95	-----	-----	78.51	36.53	11.68	32.77	395	128	AVERAGE												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5402.96	42.65	54.00	-11.35	28.44	35.99	10.90	32.68	395	128	AVERAGE																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5670.00	93.95	-----	-----	78.51	36.53	11.68	32.77	395	128	AVERAGE																																																																																									

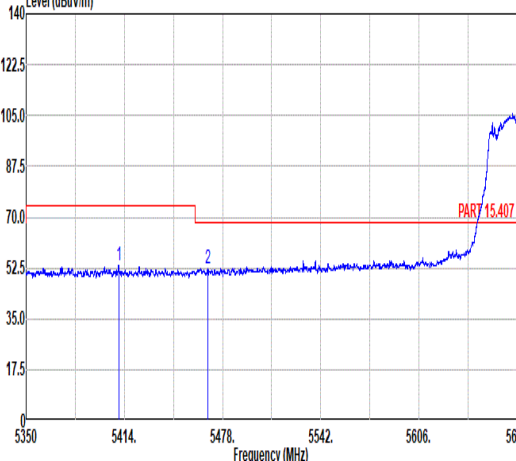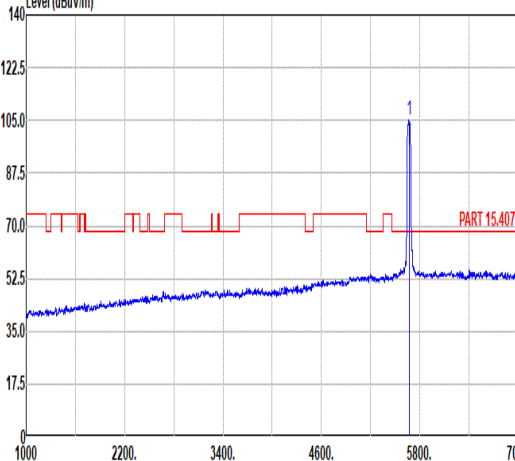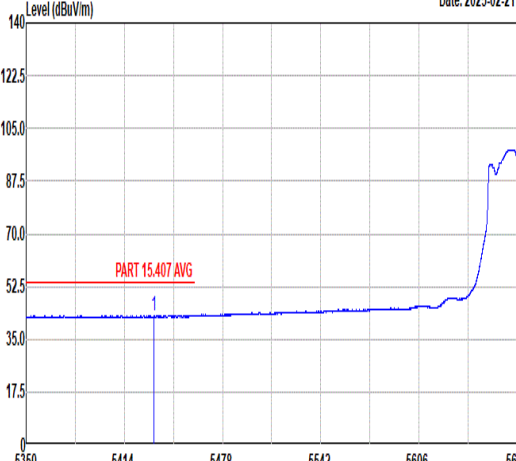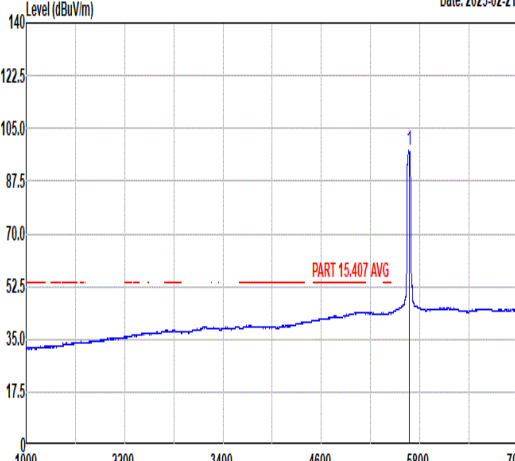

Mode	24																																																																																																																																																																												
	Band Edge - L																																																																																																																																																																												
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																																																																																																												
ANT	1+2																																																																																																																																																																												
Pol.	Vertical	Fundamental																																																																																																																																																																											
Peak	Level (dBuV/m) Date: 2025-02-21  5350 5414. 5478. 5542. 5606. 5670 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5410.35</td><td>53.30</td><td>74.00</td><td>-20.70</td><td>39.09</td><td>35.98</td><td>10.91</td><td>32.68</td><td>158 159 PEAK</td></tr><tr><td>2</td><td>5468.27</td><td>52.49</td><td>68.30</td><td>-15.81</td><td>38.06</td><td>35.97</td><td>11.15</td><td>32.69</td><td>158 159 PEAK</td></tr></tbody></table> Level (dBuV/m) Date: 2025-02-21  1000 2200. 3400. 4600. 5800. 7000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>105.24</td><td>-----</td><td>-----</td><td>89.80</td><td>36.53</td><td>11.68</td><td>32.77</td><td>158 159 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5410.35	53.30	74.00	-20.70	39.09	35.98	10.91	32.68	158 159 PEAK	2	5468.27	52.49	68.30	-15.81	38.06	35.97	11.15	32.69	158 159 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5670.00	105.24	-----	-----	89.80	36.53	11.68	32.77	158 159 PEAK	Avg	Level (dBuV/m) Date: 2025-02-21  5350 5414. 5478. 5542. 5606. 5670 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5433.39</td><td>42.82</td><td>54.00</td><td>-11.18</td><td>28.57</td><td>35.93</td><td>11.01</td><td>32.69</td><td>158 159 AVERAGE</td></tr></tbody></table> Level (dBuV/m) Date: 2025-02-21  1000 2200. 3400. 4600. 5800. 7000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>97.97</td><td>-----</td><td>-----</td><td>82.53</td><td>36.53</td><td>11.68</td><td>32.77</td><td>158 159 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5433.39	42.82	54.00	-11.18	28.57	35.93	11.01	32.69	158 159 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5670.00	97.97	-----	-----	82.53	36.53	11.68	32.77	158 159 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5410.35	53.30	74.00	-20.70	39.09	35.98	10.91	32.68	158 159 PEAK																																																																																																																																																																				
2	5468.27	52.49	68.30	-15.81	38.06	35.97	11.15	32.69	158 159 PEAK																																																																																																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5670.00	105.24	-----	-----	89.80	36.53	11.68	32.77	158 159 PEAK																																																																																																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5433.39	42.82	54.00	-11.18	28.57	35.93	11.01	32.69	158 159 AVERAGE																																																																																																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5670.00	97.97	-----	-----	82.53	36.53	11.68	32.77	158 159 AVERAGE																																																																																																																																																																				



Mode	24																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																									
ANT	1+2																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2025-02-21 Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5726.11</td><td>56.38</td><td>68.30</td><td>-11.92</td><td>40.87</td><td>36.65</td><td>11.65</td><td>32.79</td><td>158</td><td>159</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5726.11	56.38	68.30	-11.92	40.87	36.65	11.65	32.79	158	159	PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5726.11	56.38	68.30	-11.92	40.87	36.65	11.65	32.79	158	159	PEAK																															



		25																																																																																							
Mode	Band Edge - L																																																																																								
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																								
ANT	1+2																																																																																								
Pol.	Horizontal										Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.34</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>41.29</td><td>35.71</td><td>11.09</td><td>32.63</td><td>158</td><td>109 PEAK</td></tr></table>										Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5147.34	55.46	74.00	-18.54	41.29	35.71	11.09	32.63	158	109 PEAK	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>92.80</td><td>-----</td><td>-----</td><td>78.60</td><td>35.77</td><td>11.07</td><td>32.64</td><td>158</td><td>109 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5210.00	92.80	-----	-----	78.60	35.77	11.07	32.64	158	109 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5147.34	55.46	74.00	-18.54	41.29	35.71	11.09	32.63	158	109 PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5210.00	92.80	-----	-----	78.60	35.77	11.07	32.64	158	109 PEAK																																																																															
Avg	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.84</td><td>46.00</td><td>-8.00</td><td>31.84</td><td>35.70</td><td>11.09</td><td>32.63</td><td>158</td><td>109 AVERAGE</td></tr></table>										Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.84	46.00	-8.00	31.84	35.70	11.09	32.63	158	109 AVERAGE	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>85.03</td><td>-----</td><td>-----</td><td>70.82</td><td>35.80</td><td>11.05</td><td>32.64</td><td>158</td><td>109 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5210.00	85.03	-----	-----	70.82	35.80	11.05	32.64	158	109 AVERAGE	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5149.84	46.00	-8.00	31.84	35.70	11.09	32.63	158	109 AVERAGE																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5210.00	85.03	-----	-----	70.82	35.80	11.05	32.64	158	109 AVERAGE																																																																															



Mode	25																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5134.51</td><td>58.41</td><td>74.00</td><td>-15.59</td><td>44.22</td><td>35.73</td><td>11.09</td><td>32.63</td><td>135</td><td>161</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5134.51	58.41	74.00	-15.59	44.22	35.73	11.09	32.63	135	161	PEAK	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>96.06</td><td>-----</td><td>-----</td><td>81.85</td><td>35.80</td><td>11.05</td><td>32.64</td><td>135</td><td>161</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5210.00	96.06	-----	-----	81.85	35.80	11.05	32.64	135	161	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5134.51	58.41	74.00	-15.59	44.22	35.73	11.09	32.63	135	161	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5210.00	96.06	-----	-----	81.85	35.80	11.05	32.64	135	161	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.44</td><td>48.19</td><td>54.00</td><td>-5.81</td><td>34.03</td><td>35.70</td><td>11.09</td><td>32.63</td><td>135</td><td>161</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.44	48.19	54.00	-5.81	34.03	35.70	11.09	32.63	135	161	AVERAGE	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>87.54</td><td>-----</td><td>-----</td><td>73.33</td><td>35.79</td><td>11.06</td><td>32.64</td><td>135</td><td>161</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5210.00	87.54	-----	-----	73.33	35.79	11.06	32.64	135	161	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5149.44	48.19	54.00	-5.81	34.03	35.70	11.09	32.63	135	161	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5210.00	87.54	-----	-----	73.33	35.79	11.06	32.64	135	161	AVERAGE																																																																							



Mode	25									
	Band Edge - R									
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz									
ANT	1+2									
Pol.	Vertical					Fundamental				
Peak	Level (dBuV/m) <									



Mode	26																																																																											
	Band Edge - L																																																																											
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																																											
ANT	1+2																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5065.25</td><td>52.72</td><td>74.00</td><td>-21.28</td><td>38.40</td><td>35.80</td><td>11.13</td><td>32.61</td><td>103 149 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5065.25	52.72	74.00	-21.28	38.40	35.80	11.13	32.61	103 149 PEAK	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>89.45</td><td>-----</td><td>-----</td><td>75.32</td><td>35.80</td><td>10.99</td><td>32.66</td><td>103 149 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	89.45	-----	-----	75.32	35.80	10.99	32.66	103 149 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5065.25	52.72	74.00	-21.28	38.40	35.80	11.13	32.61	103 149 PEAK																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5290.00	89.45	-----	-----	75.32	35.80	10.99	32.66	103 149 PEAK																																																																			
Avg	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5122.09</td><td>42.93</td><td>54.00</td><td>-11.07</td><td>28.69</td><td>35.76</td><td>11.10</td><td>32.62</td><td>103 149 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5122.09	42.93	54.00	-11.07	28.69	35.76	11.10	32.62	103 149 AVERAGE	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>82.17</td><td>-----</td><td>-----</td><td>68.03</td><td>35.80</td><td>11.00</td><td>32.66</td><td>103 149 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	82.17	-----	-----	68.03	35.80	11.00	32.66	103 149 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5122.09	42.93	54.00	-11.07	28.69	35.76	11.10	32.62	103 149 AVERAGE																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5290.00	82.17	-----	-----	68.03	35.80	11.00	32.66	103 149 AVERAGE																																																																			



Mode	26																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																									
ANT	1+2																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-02-21 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5354.26</td><td>53.08</td><td>74.00</td><td>-20.92</td><td>38.72</td><td>36.09</td><td>10.94</td><td>32.67</td><td>103 149 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5354.26	53.08	74.00	-20.92	38.72	36.09	10.94	32.67	103 149 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																	
1	5354.26	53.08	74.00	-20.92	38.72	36.09	10.94	32.67	103 149 PEAK																																	
Avg	Date: 2025-02-21 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5353.07</td><td>43.61</td><td>54.00</td><td>-10.39</td><td>29.25</td><td>36.09</td><td>10.94</td><td>32.67</td><td>103 149 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5353.07	43.61	54.00	-10.39	29.25	36.09	10.94	32.67	103 149 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																	
1	5353.07	43.61	54.00	-10.39	29.25	36.09	10.94	32.67	103 149 AVERAGE																																	



		26									
Mode		Band Edge - L									
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz									
ANT		1+2									
Pol.		Vertical					Fundamental				
Peak	Level (dBuV/m) Date: 2025-02-21										



Mode	26																																																
	Band Edge - R																																																
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																
ANT	1+2																																																
Pol.	Vertical					Fundamental																																											
Peak	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5356.30</td><td>57.40</td><td>74.00</td><td>-16.60</td><td>43.04</td><td>36.09</td><td>10.94</td><td>32.67</td><td>173</td><td>171 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5356.30	57.40	74.00	-16.60	43.04	36.09	10.94	32.67	173	171 PEAK	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																								
1	5356.30	57.40	74.00	-16.60	43.04	36.09	10.94	32.67	173	171 PEAK																																							
Avg	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.52</td><td>48.34</td><td>54.00</td><td>-5.66</td><td>33.97</td><td>36.10</td><td>10.94</td><td>32.67</td><td>173</td><td>171 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.52	48.34	54.00	-5.66	33.97	36.10	10.94	32.67	173	171 AVERAGE	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																								
1	5350.52	48.34	54.00	-5.66	33.97	36.10	10.94	32.67	173	171 AVERAGE																																							







Mode	27																																																																																											
	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																											
ANT	1+2																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5440.72</td><td>53.11</td><td>74.00</td><td>-20.89</td><td>38.84</td><td>35.92</td><td>11.04</td><td>32.69</td><td>397 136 PEAK</td></tr><tr><td>2</td><td>5468.08</td><td>53.25</td><td>68.30</td><td>-15.05</td><td>38.82</td><td>35.97</td><td>11.15</td><td>32.69</td><td>397 136 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5440.72	53.11	74.00	-20.89	38.84	35.92	11.04	32.69	397 136 PEAK	2	5468.08	53.25	68.30	-15.05	38.82	35.97	11.15	32.69	397 136 PEAK	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>93.77</td><td>-----</td><td>-----</td><td>78.91</td><td>36.16</td><td>11.41</td><td>32.71</td><td>397 136 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	93.77	-----	-----	78.91	36.16	11.41	32.71	397 136 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5440.72	53.11	74.00	-20.89	38.84	35.92	11.04	32.69	397 136 PEAK																																																																																			
2	5468.08	53.25	68.30	-15.05	38.82	35.97	11.15	32.69	397 136 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5530.00	93.77	-----	-----	78.91	36.16	11.41	32.71	397 136 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5455.66</td><td>43.29</td><td>54.00</td><td>-10.71</td><td>28.96</td><td>35.92</td><td>11.10</td><td>32.69</td><td>397 136 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5455.66	43.29	54.00	-10.71	28.96	35.92	11.10	32.69	397 136 AVERAGE	Level (dBuV/m) Date: 2025-02-21 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>85.82</td><td>-----</td><td>-----</td><td>70.92</td><td>36.17</td><td>11.44</td><td>32.71</td><td>397 136 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	85.82	-----	-----	70.92	36.17	11.44	32.71	397 136 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5455.66	43.29	54.00	-10.71	28.96	35.92	11.10	32.69	397 136 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5530.00	85.82	-----	-----	70.92	36.17	11.44	32.71	397 136 AVERAGE																																																																																			



Mode	27																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																									
ANT	1+2																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5734.22</td><td>53.69</td><td>68.30</td><td>-14.61</td><td>38.16</td><td>36.67</td><td>11.65</td><td>32.79</td><td>397 136 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5734.22	53.69	68.30	-14.61	38.16	36.67	11.65	32.79	397 136 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5734.22	53.69	68.30	-14.61	38.16	36.67	11.65	32.79	397 136 PEAK																																	

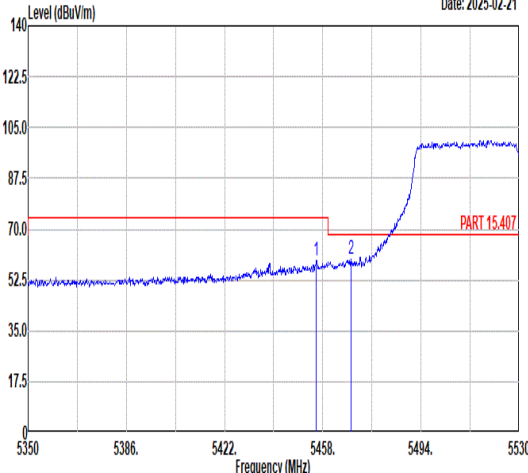
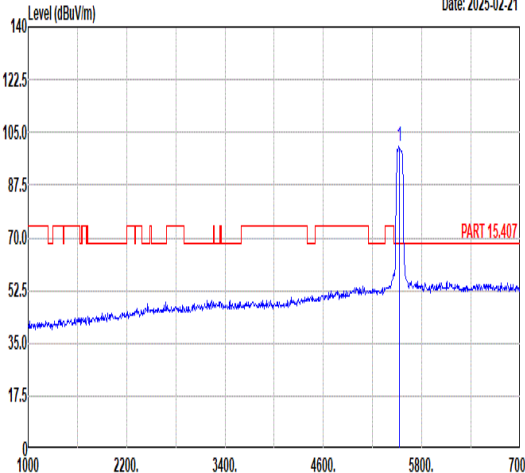
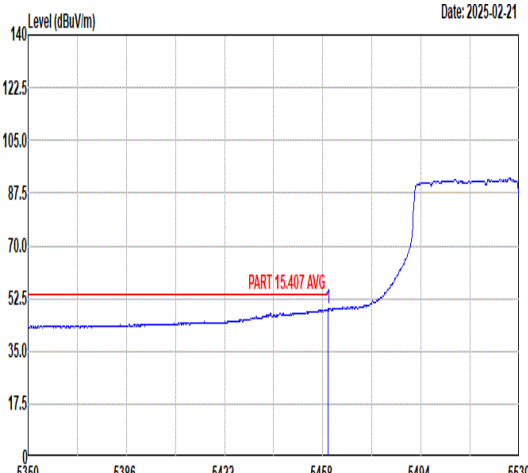
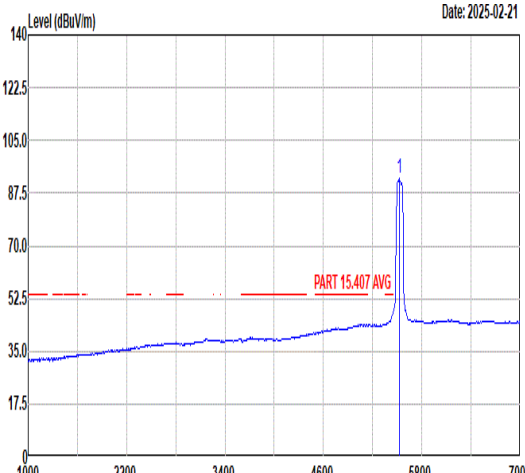


Mode	27																																																																																											
	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																											
ANT	1+2																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5455.66</td><td>59.09</td><td>74.00</td><td>-14.91</td><td>44.76</td><td>35.92</td><td>11.10</td><td>32.69</td><td>152 173 PEAK</td></tr><tr><td>2</td><td>5468.26</td><td>59.88</td><td>68.30</td><td>-8.42</td><td>45.45</td><td>35.97</td><td>11.15</td><td>32.69</td><td>152 173 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5455.66	59.09	74.00	-14.91	44.76	35.92	11.10	32.69	152 173 PEAK	2	5468.26	59.88	68.30	-8.42	45.45	35.97	11.15	32.69	152 173 PEAK	Level (dBuV/m) Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5530.00</td><td>100.19</td><td>-----</td><td>-----</td><td>85.40</td><td>36.14</td><td>11.36</td><td>32.71</td><td>152 173 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	100.19	-----	-----	85.40	36.14	11.36	32.71	152 173 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5455.66	59.09	74.00	-14.91	44.76	35.92	11.10	32.69	152 173 PEAK																																																																																			
2	5468.26	59.88	68.30	-8.42	45.45	35.97	11.15	32.69	152 173 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5530.00	100.19	-----	-----	85.40	36.14	11.36	32.71	152 173 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.80</td><td>48.88</td><td>54.00</td><td>-5.12</td><td>34.51</td><td>35.94</td><td>11.12</td><td>32.69</td><td>152 173 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.80	48.88	54.00	-5.12	34.51	35.94	11.12	32.69	152 173 AVERAGE	Level (dBuV/m) Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5530.00</td><td>92.28</td><td>-----</td><td>-----</td><td>77.45</td><td>36.15</td><td>11.39</td><td>32.71</td><td>152 173 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	92.28	-----	-----	77.45	36.15	11.39	32.71	152 173 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5459.80	48.88	54.00	-5.12	34.51	35.94	11.12	32.69	152 173 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5530.00	92.28	-----	-----	77.45	36.15	11.39	32.71	152 173 AVERAGE																																																																																			



Mode	27																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																									
ANT	1+2																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5760.07</td><td>53.73</td><td>68.30</td><td>-14.57</td><td>38.21</td><td>36.68</td><td>11.64</td><td>32.80</td><td>152</td><td>173</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5760.07	53.73	68.30	-14.57	38.21	36.68	11.64	32.80	152	173	PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5760.07	53.73	68.30	-14.57	38.21	36.68	11.64	32.80	152	173	PEAK																															

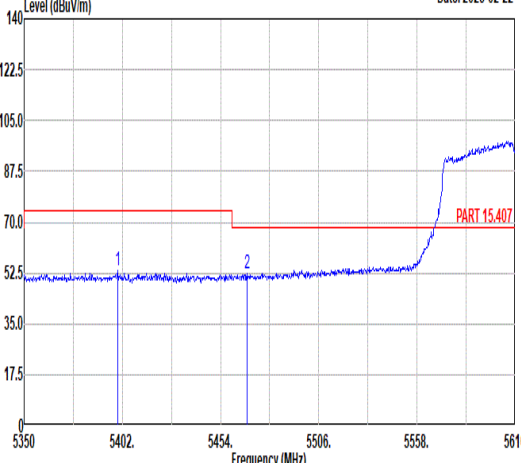
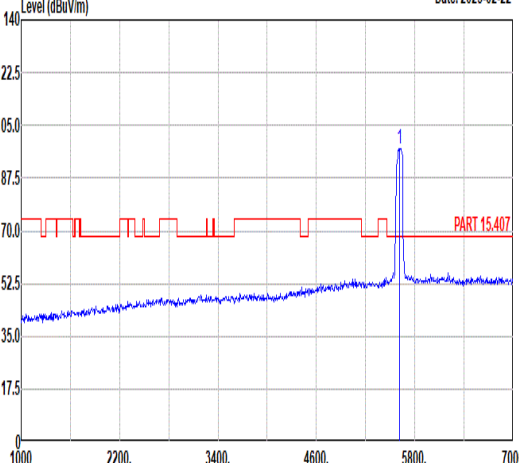
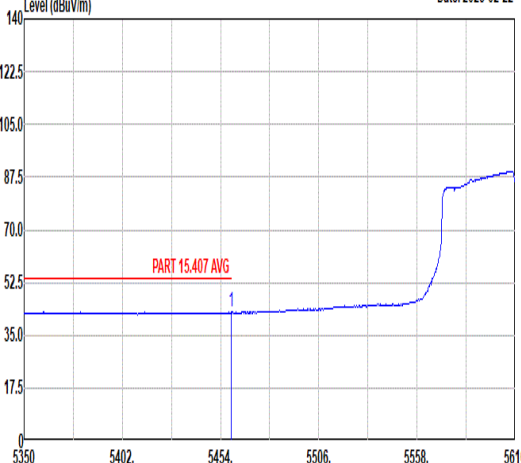
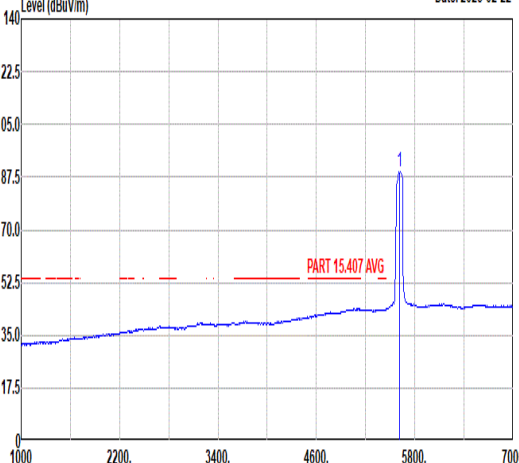


Mode	28																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																																																																																		
ANT	1+2																																																																																																		
Pol.	Horizontal					Fundamental																																																																																													
Peak	 Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue trace with two peaks labeled 1 and 2. A red limit line is at 70.0 dBuV/m. The date is 2025-02-22.					 Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a blue trace with a single peak labeled 1. A red limit line is at 70.0 dBuV/m. The date is 2025-02-22.																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5399.40</td><td>53.18</td><td>74.00</td><td>-20.82</td><td>38.95</td><td>36.00</td><td>10.91</td><td>32.68</td><td>398 125 PEAK</td></tr><tr><td>2</td><td>5468.04</td><td>52.04</td><td>68.30</td><td>-16.26</td><td>37.61</td><td>35.97</td><td>11.15</td><td>32.69</td><td>398 125 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5399.40	53.18	74.00	-20.82	38.95	36.00	10.91	32.68	398 125 PEAK	2	5468.04	52.04	68.30	-16.26	37.61	35.97	11.15	32.69	398 125 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>97.45</td><td>-----</td><td>-----</td><td>82.10</td><td>36.40</td><td>11.70</td><td>32.75</td><td>398 125 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5610.00	97.45	-----	-----	82.10	36.40	11.70	32.75
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5399.40	53.18	74.00	-20.82	38.95	36.00	10.91	32.68	398 125 PEAK																																																																																										
2	5468.04	52.04	68.30	-16.26	37.61	35.97	11.15	32.69	398 125 PEAK																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5610.00	97.45	-----	-----	82.10	36.40	11.70	32.75	398 125 PEAK																																																																																										
Avg	 Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue trace with a peak labeled 1. A red limit line is at 52.5 dBuV/m. The date is 2025-02-22.					 Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a blue trace with a peak labeled 1. A red limit line is at 52.5 dBuV/m. The date is 2025-02-22.																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.72</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>28.31</td><td>35.94</td><td>11.12</td><td>32.69</td><td>398 125 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5459.72	42.68	54.00	-11.32	28.31	35.94	11.12	32.69	398 125 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>89.43</td><td>-----</td><td>-----</td><td>74.08</td><td>36.40</td><td>11.70</td><td>32.75</td><td>398 125 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5610.00	89.43	-----	-----	74.08	36.40	11.70	32.75	398 125 AVERAGE									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5459.72	42.68	54.00	-11.32	28.31	35.94	11.12	32.69	398 125 AVERAGE																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5610.00	89.43	-----	-----	74.08	36.40	11.70	32.75	398 125 AVERAGE																																																																																										



Mode	28																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																								
ANT	1+2																																								
Pol.	Horizontal	Fundamental																																							
Peak	Date: 2025-02-22 Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.70</td><td>54.56</td><td>68.30</td><td>-13.74</td><td>39.03</td><td>36.69</td><td>11.64</td><td>32.80</td><td>398</td><td>125° PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5755.70	54.56	68.30	-13.74	39.03	36.69	11.64	32.80	398	125° PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																
1	5755.70	54.56	68.30	-13.74	39.03	36.69	11.64	32.80	398	125° PEAK																															

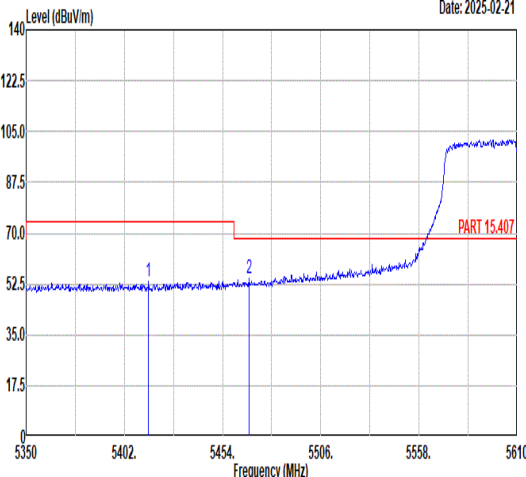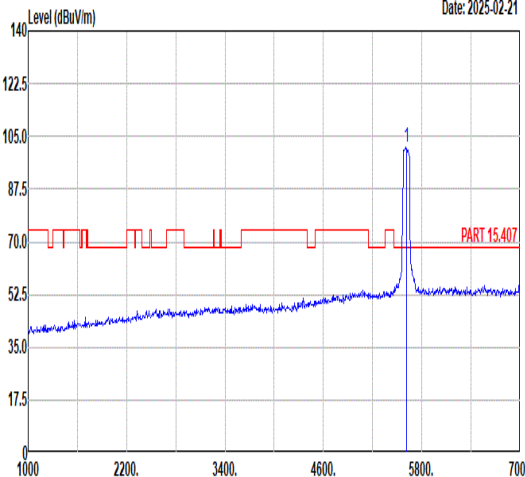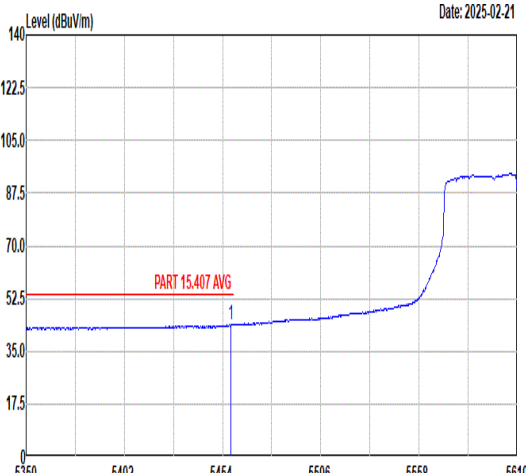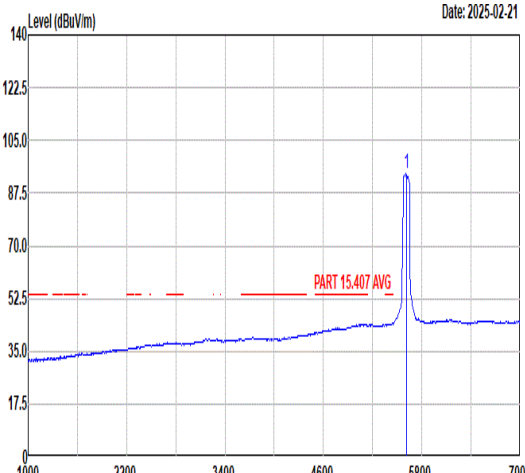

Mode	28																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																																																																																		
ANT	1+2																																																																																																		
Pol.	Vertical					Fundamental																																																																																													
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5414.74</td><td>53.40</td><td>74.00</td><td>-20.60</td><td>39.18</td><td>35.97</td><td>10.93</td><td>32.68</td><td>133 173 PEAK</td></tr><tr><td>2</td><td>5468.04</td><td>54.24</td><td>68.30</td><td>-14.06</td><td>39.81</td><td>35.97</td><td>11.15</td><td>32.69</td><td>133 173 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5414.74	53.40	74.00	-20.60	39.18	35.97	10.93	32.68	133 173 PEAK	2	5468.04	54.24	68.30	-14.06	39.81	35.97	11.15	32.69	133 173 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>101.36</td><td>-----</td><td>-----</td><td>86.06</td><td>36.33</td><td>11.71</td><td>32.74</td><td>133 173 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5610.00	101.36	-----	-----	86.06	36.33	11.71	32.74
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5414.74	53.40	74.00	-20.60	39.18	35.97	10.93	32.68	133 173 PEAK																																																																																										
2	5468.04	54.24	68.30	-14.06	39.81	35.97	11.15	32.69	133 173 PEAK																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5610.00	101.36	-----	-----	86.06	36.33	11.71	32.74	133 173 PEAK																																																																																										
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5458.42</td><td>43.97</td><td>54.00</td><td>-10.03</td><td>29.62</td><td>35.93</td><td>11.11</td><td>32.69</td><td>133 173 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5458.42	43.97	54.00	-10.03	29.62	35.93	11.11	32.69	133 173 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>94.16</td><td>-----</td><td>-----</td><td>78.86</td><td>36.33</td><td>11.71</td><td>32.74</td><td>133 173 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5610.00	94.16	-----	-----	78.86	36.33	11.71	32.74	133 173 AVERAGE									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5458.42	43.97	54.00	-10.03	29.62	35.93	11.11	32.69	133 173 AVERAGE																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5610.00	94.16	-----	-----	78.86	36.33	11.71	32.74	133 173 AVERAGE																																																																																										



Mode	28																																										
	Band Edge - R																																										
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																										
ANT	1+2																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2025-02-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5732.61</td><td>54.40</td><td>68.30</td><td>-13.90</td><td>38.87</td><td>36.67</td><td>11.65</td><td>32.79</td><td>133</td><td>173 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5732.61	54.40	68.30	-13.90	38.87	36.67	11.65	32.79	133	173 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5732.61	54.40	68.30	-13.90	38.87	36.67	11.65	32.79	133	173 PEAK																																	



Mode	29																																																																											
	Band Edge - L																																																																											
	U-NII-2A_5.25-5.35_802.11ac VHT160_CH50_5250MHz																																																																											
ANT	1+2																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5057.00</td><td>53.77</td><td>74.00</td><td>-20.23</td><td>39.44</td><td>35.80</td><td>11.14</td><td>32.61</td><td>380 130 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5057.00	53.77	74.00	-20.23	39.44	35.80	11.14	32.61	380 130 PEAK	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>92.47</td><td>-----</td><td>-----</td><td>78.29</td><td>35.80</td><td>11.03</td><td>32.65</td><td>380 130 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	92.47	-----	-----	78.29	35.80	11.03	32.65	380 130 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5057.00	53.77	74.00	-20.23	39.44	35.80	11.14	32.61	380 130 PEAK																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5250.00	92.47	-----	-----	78.29	35.80	11.03	32.65	380 130 PEAK																																																																			
Avg	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5129.75</td><td>43.34</td><td>54.00</td><td>-10.66</td><td>29.13</td><td>35.74</td><td>11.10</td><td>32.63</td><td>380 130 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5129.75	43.34	54.00	-10.66	29.13	35.74	11.10	32.63	380 130 AVERAGE	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>84.22</td><td>-----</td><td>-----</td><td>70.05</td><td>35.80</td><td>11.02</td><td>32.65</td><td>380 130 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	84.22	-----	-----	70.05	35.80	11.02	32.65	380 130 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5129.75	43.34	54.00	-10.66	29.13	35.74	11.10	32.63	380 130 AVERAGE																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5250.00	84.22	-----	-----	70.05	35.80	11.02	32.65	380 130 AVERAGE																																																																			



Mode	29																																										
	Band Edge - R																																										
	U-NII-2A_5.25-5.35_802.11ac VHT160_CH50_5250MHz																																										
ANT	1+2																																										
Pol.	Horizontal	Fundamental																																									
Peak	Date: 2025-02-22 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5385.03</td><td>52.47</td><td>74.00</td><td>-21.53</td><td>38.20</td><td>36.03</td><td>10.92</td><td>32.68</td><td>380</td><td>130 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5385.03	52.47	74.00	-21.53	38.20	36.03	10.92	32.68	380	130 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5385.03	52.47	74.00	-21.53	38.20	36.03	10.92	32.68	380	130 PEAK																																	
Avg	Date: 2025-02-22 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5455.80</td><td>42.78</td><td>54.00</td><td>-11.22</td><td>28.45</td><td>35.92</td><td>11.10</td><td>32.69</td><td>380</td><td>130 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5455.80	42.78	54.00	-11.22	28.45	35.92	11.10	32.69	380	130 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5455.80	42.78	54.00	-11.22	28.45	35.92	11.10	32.69	380	130 AVERAGE																																	





Mode	29																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ac VHT160_CH50_5250MHz																																																																									
ANT	1+2																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5066.50</td><td>54.55</td><td>74.00</td><td>-19.45</td><td>40.23</td><td>35.80</td><td>11.13</td><td>32.61</td><td>173 175 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5066.50	54.55	74.00	-19.45	40.23	35.80	11.13	32.61	173 175 PEAK	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5250.00</td><td>97.48</td><td>-----</td><td>-----</td><td>83.31</td><td>35.80</td><td>11.02</td><td>32.65</td><td>173 175 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5250.00	97.48	-----	-----	83.31	35.80	11.02	32.65	173 175 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5066.50	54.55	74.00	-19.45	40.23	35.80	11.13	32.61	173 175 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5250.00	97.48	-----	-----	83.31	35.80	11.02	32.65	173 175 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5122.25</td><td>45.04</td><td>54.00</td><td>-8.96</td><td>30.80</td><td>35.76</td><td>11.10</td><td>32.62</td><td>173 175 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5122.25	45.04	54.00	-8.96	30.80	35.76	11.10	32.62	173 175 AVERAGE	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5250.00</td><td>90.04</td><td>-----</td><td>-----</td><td>75.86</td><td>35.80</td><td>11.03</td><td>32.65</td><td>173 175 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5250.00	90.04	-----	-----	75.86	35.80	11.03	32.65	173 175 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5122.25	45.04	54.00	-8.96	30.80	35.76	11.10	32.62	173 175 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5250.00	90.04	-----	-----	75.86	35.80	11.03	32.65	173 175 AVERAGE																																																																		







Mode	29																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ac VHT160_CH50_5250MHz																																									
ANT	1+2																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2025-02-22 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5376.00</td><td>53.77</td><td>74.00</td><td>-20.23</td><td>39.48</td><td>36.05</td><td>10.92</td><td>32.68</td><td>173</td><td>175</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5376.00	53.77	74.00	-20.23	39.48	36.05	10.92	32.68	173	175	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																	
1	5376.00	53.77	74.00	-20.23	39.48	36.05	10.92	32.68	173	175	PEAK																															
Avg	Date: 2025-02-22 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5396.16</td><td>44.32</td><td>54.00</td><td>-9.68</td><td>30.08</td><td>36.01</td><td>10.91</td><td>32.68</td><td>173</td><td>175</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5396.16	44.32	54.00	-9.68	30.08	36.01	10.91	32.68	173	175	AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																	
1	5396.16	44.32	54.00	-9.68	30.08	36.01	10.91	32.68	173	175	AVERAGE																															

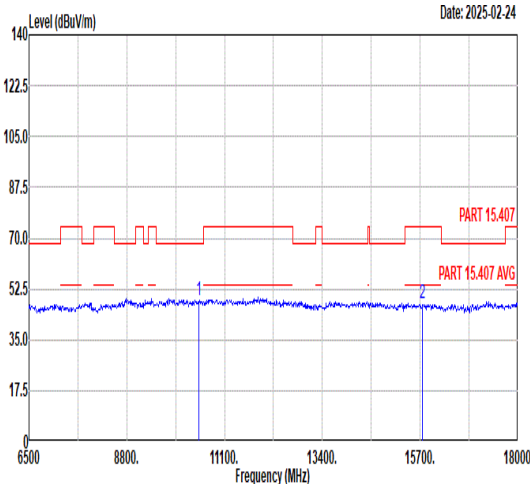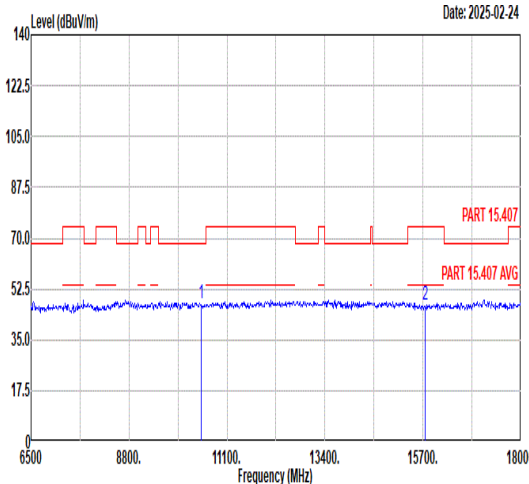

Mode	29																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2A_5.25-5.35_802.11ac VHT160_CH50_5250MHz																																																																																																																			
ANT	1+2																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10500.00</td><td>48.55</td><td>68.30</td><td>-19.75</td><td>47.51</td><td>38.20</td><td>14.24</td><td>51.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15750.00</td><td>47.49</td><td>74.00</td><td>-26.51</td><td>42.47</td><td>40.65</td><td>17.02</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10500.00	48.55	68.30	-19.75	47.51	38.20	14.24	51.40	---	---	Peak	2	15750.00	47.49	74.00	-26.51	42.47	40.65	17.02	52.65	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10500.00</td><td>47.49</td><td>68.30</td><td>-20.81</td><td>46.45</td><td>38.20</td><td>14.24</td><td>51.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15750.00</td><td>47.08</td><td>74.00</td><td>-26.92</td><td>42.06</td><td>40.65</td><td>17.02</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10500.00	47.49	68.30	-20.81	46.45	38.20	14.24	51.40	---	---	Peak	2	15750.00	47.08	74.00	-26.92	42.06	40.65	17.02	52.65	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10500.00	48.55	68.30	-19.75	47.51	38.20	14.24	51.40	---	---	Peak																																																																																																									
2	15750.00	47.49	74.00	-26.51	42.47	40.65	17.02	52.65	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10500.00	47.49	68.30	-20.81	46.45	38.20	14.24	51.40	---	---	Peak																																																																																																									
2	15750.00	47.08	74.00	-26.92	42.06	40.65	17.02	52.65	---	---	Peak																																																																																																									

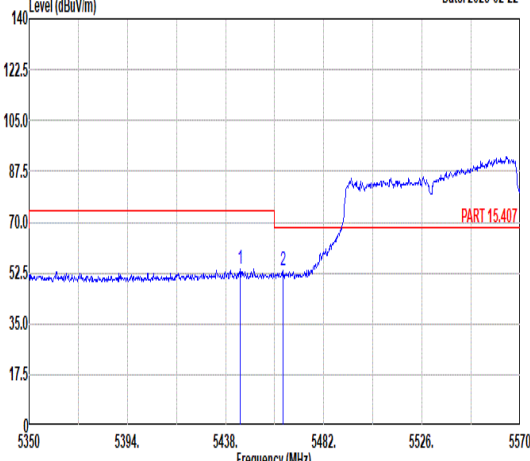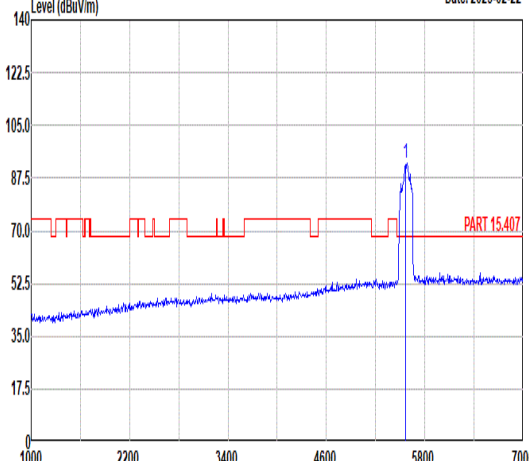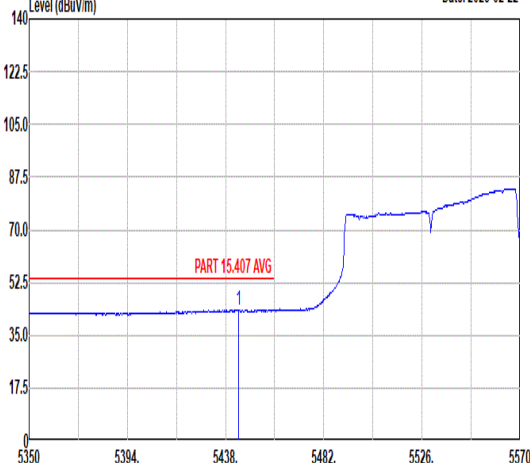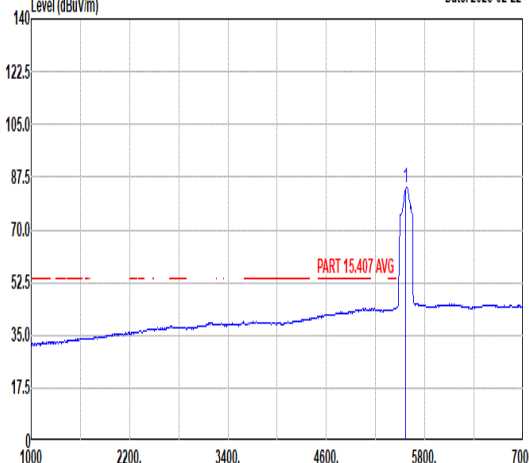

Mode	30																																																																																																						
	Band Edge - L																																																																																																						
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																																																																																						
ANT	1+2																																																																																																						
Pol.	Horizontal					Fundamental																																																																																																	
Peak	Level (dBuV/m) Date: 2025-02-22  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5444.60</td><td>54.13</td><td>74.00</td><td>-19.87</td><td>39.85</td><td>35.91</td><td>11.06</td><td>32.69</td><td>389</td><td>144 PEAK</td></tr><tr><td>2</td><td>5463.74</td><td>53.24</td><td>68.30</td><td>-15.06</td><td>38.84</td><td>35.95</td><td>11.14</td><td>32.69</td><td>389</td><td>144 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5444.60	54.13	74.00	-19.87	39.85	35.91	11.06	32.69	389	144 PEAK	2	5463.74	53.24	68.30	-15.06	38.84	35.95	11.14	32.69	389	144 PEAK	Level (dBuV/m) Date: 2025-02-22  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5570.00</td><td>92.29</td><td>-----</td><td>-----</td><td>77.11</td><td>36.27</td><td>11.64</td><td>32.73</td><td>389</td><td>144 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5570.00	92.29	-----	-----	77.11	36.27	11.64	32.73	389	144 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5444.60	54.13	74.00	-19.87	39.85	35.91	11.06	32.69	389	144 PEAK																																																																																													
2	5463.74	53.24	68.30	-15.06	38.84	35.95	11.14	32.69	389	144 PEAK																																																																																													
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5570.00	92.29	-----	-----	77.11	36.27	11.64	32.73	389	144 PEAK																																																																																													
Avg	Level (dBuV/m) Date: 2025-02-22  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5443.94</td><td>43.38</td><td>54.00</td><td>-10.62</td><td>29.11</td><td>35.91</td><td>11.05</td><td>32.69</td><td>389</td><td>144 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5443.94	43.38	54.00	-10.62	29.11	35.91	11.05	32.69	389	144 AVERAGE	Level (dBuV/m) Date: 2025-02-22  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5570.00</td><td>84.18</td><td>-----</td><td>-----</td><td>69.04</td><td>36.26</td><td>11.61</td><td>32.73</td><td>389</td><td>144 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5570.00	84.18	-----	-----	69.04	36.26	11.61	32.73	389	144 AVERAGE											
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5443.94	43.38	54.00	-10.62	29.11	35.91	11.05	32.69	389	144 AVERAGE																																																																																													
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5570.00	84.18	-----	-----	69.04	36.26	11.61	32.73	389	144 AVERAGE																																																																																													



Mode	30																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																									
ANT	1+2																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-02-22 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5726.39</td><td>53.53</td><td>68.30</td><td>-14.77</td><td>38.02</td><td>36.65</td><td>11.65</td><td>32.79</td><td>389 144 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5726.39	53.53	68.30	-14.77	38.02	36.65	11.65	32.79	389 144 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5726.39	53.53	68.30	-14.77	38.02	36.65	11.65	32.79	389 144 PEAK																																	





		30																																																																														
Mode		Band Edge - L																																																																														
		U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																																																														
ANT		1+2																																																																														
Pol.		Vertical					Fundamental																																																																									
Peak	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5433.16</td><td>56.65</td><td>74.00</td><td>-17.35</td><td>42.40</td><td>35.93</td><td>11.01</td><td>32.69</td><td>133 170 PEAK</td></tr><tr><td>2</td><td>5467.26</td><td>55.82</td><td>68.30</td><td>-12.48</td><td>41.39</td><td>35.97</td><td>11.15</td><td>32.69</td><td>133 170 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg	1	5433.16	56.65	74.00	-17.35	42.40	35.93	11.01	32.69	133 170 PEAK	2	5467.26	55.82	68.30	-12.48	41.39	35.97	11.15	32.69	133 170 PEAK	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5570.00</td><td>97.67</td><td>-----</td><td>-----</td><td>82.53</td><td>36.26</td><td>11.61</td><td>32.73</td><td>133 170 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg	1	5570.00	97.67	-----	-----	82.53	36.26	11.61	32.73	133 170 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg																																																																							
1	5433.16	56.65	74.00	-17.35	42.40	35.93	11.01	32.69	133 170 PEAK																																																																							
2	5467.26	55.82	68.30	-12.48	41.39	35.97	11.15	32.69	133 170 PEAK																																																																							
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg																																																																							
1	5570.00	97.67	-----	-----	82.53	36.26	11.61	32.73	133 170 PEAK																																																																							
Avg	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5437.34</td><td>47.43</td><td>54.00</td><td>-6.57</td><td>33.16</td><td>35.93</td><td>11.03</td><td>32.69</td><td>133 170 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg	1	5437.34	47.43	54.00	-6.57	33.16	35.93	11.03	32.69	133 170 AVERAGE	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5570.00</td><td>89.95</td><td>-----</td><td>-----</td><td>74.85</td><td>36.24</td><td>11.59</td><td>32.73</td><td>133 170 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg	1	5570.00	89.95	-----	-----	74.85	36.24	11.59	32.73	133 170 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg																																																																							
1	5437.34	47.43	54.00	-6.57	33.16	35.93	11.03	32.69	133 170 AVERAGE																																																																							
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg																																																																							
1	5570.00	89.95	-----	-----	74.85	36.24	11.59	32.73	133 170 AVERAGE																																																																							







Mode	30																							
	Band Edge - R																							
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																							
ANT	1+2																							
Pol.	Vertical	Fundamental																						
Peak	Date: 2025-02-22 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5734.58</td><td>55.44</td><td>68.30</td><td>-12.86</td><td>39.91</td><td>36.67</td><td>11.65</td><td>32.79</td><td>133</td><td>170 PEAK</td></tr></table>		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	5734.58	55.44	68.30	-12.86	39.91	36.67	11.65	32.79	133	170 PEAK	Blank
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg															
1	5734.58	55.44	68.30	-12.86	39.91	36.67	11.65	32.79	133	170 PEAK														



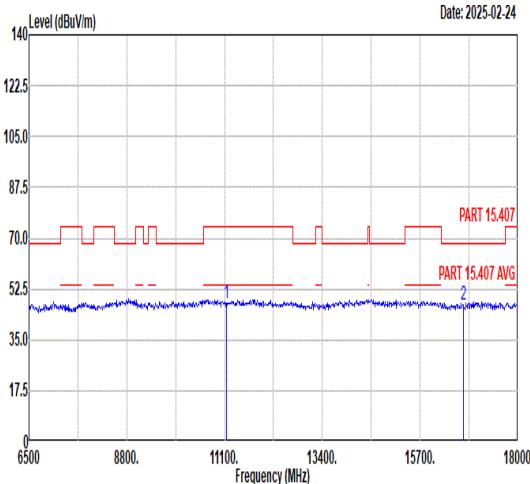
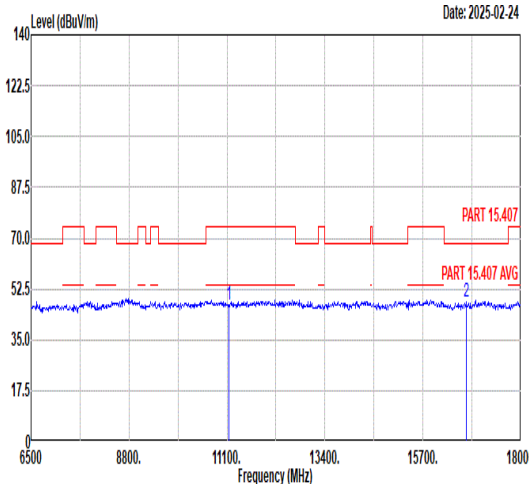


Mode	30																																																																																																																	
	Harmonic																																																																																																																	
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																																																																																																	
ANT	1+2																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																											
Peak Avg																																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11140.00</td><td>47.55</td><td>74.00</td><td>-26.45</td><td>45.62</td><td>38.04</td><td>14.62</td><td>50.73</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16710.00</td><td>47.21</td><td>68.30</td><td>-21.09</td><td>41.23</td><td>41.41</td><td>17.42</td><td>52.85</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11140.00	47.55	74.00	-26.45	45.62	38.04	14.62	50.73	---	---	Peak	2	16710.00	47.21	68.30	-21.09	41.23	41.41	17.42	52.85	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11140.00</td><td>47.22</td><td>74.00</td><td>-26.78</td><td>45.29</td><td>38.04</td><td>14.62</td><td>50.73</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16710.00</td><td>48.14</td><td>68.30</td><td>-20.16</td><td>42.16</td><td>41.41</td><td>17.42</td><td>52.85</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11140.00	47.22	74.00	-26.78	45.29	38.04	14.62	50.73	---	---	Peak	2	16710.00	48.14	68.30	-20.16	42.16	41.41	17.42	52.85	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																									
1	11140.00	47.55	74.00	-26.45	45.62	38.04	14.62	50.73	---	---	Peak																																																																																																							
2	16710.00	47.21	68.30	-21.09	41.23	41.41	17.42	52.85	---	---	Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																									
1	11140.00	47.22	74.00	-26.78	45.29	38.04	14.62	50.73	---	---	Peak																																																																																																							
2	16710.00	48.14	68.30	-20.16	42.16	41.41	17.42	52.85	---	---	Peak																																																																																																							

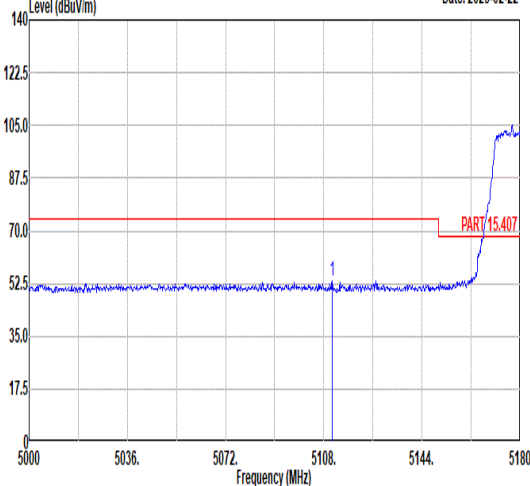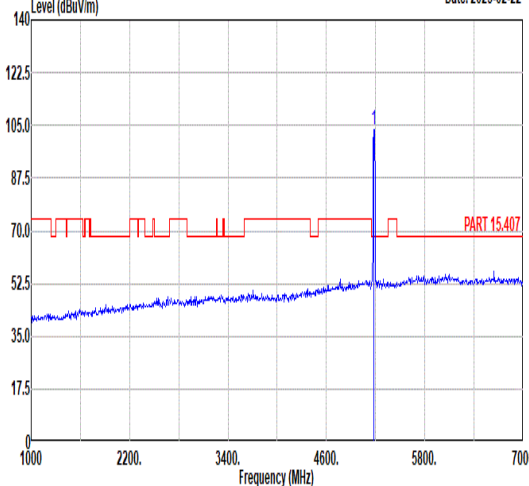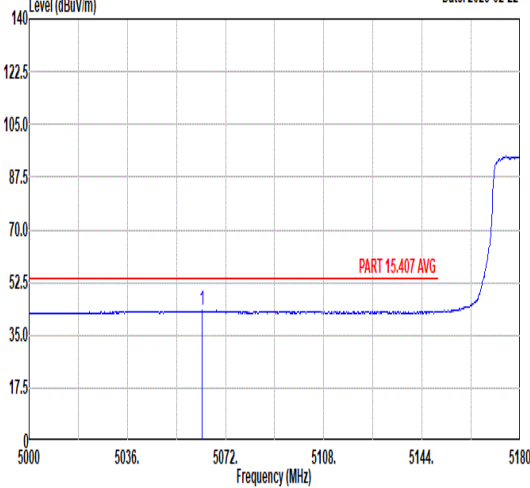
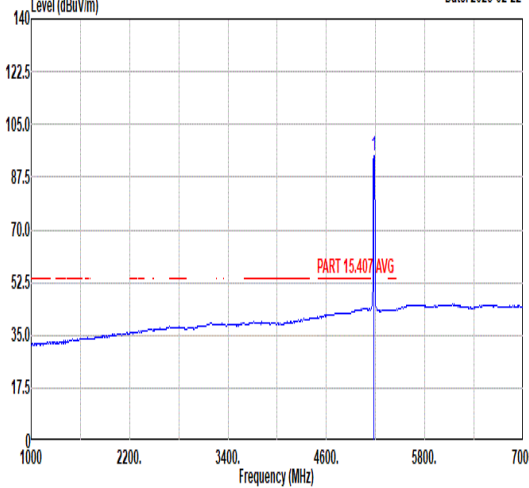


		31																																																																																							
Mode		Band Edge																																																																																							
		U-NII-1_5.25-5.35_802.11ax HE20_CH36_5180MHz																																																																																							
ANT		1+2																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-02-22  Frequency (MHz)					Level (dBuV/m) Date: 2025-02-22  Frequency (MHz)																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5111.06</td><td>53.32</td><td>74.00</td><td>-20.68</td><td>39.05</td><td>35.78</td><td>11.11</td><td>32.62</td><td>391 130 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5111.06	53.32	74.00	-20.68	39.05	35.78	11.11	32.62	391 130 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>103.49</td><td>-----</td><td>-----</td><td>89.30</td><td>35.76</td><td>11.07</td><td>32.64</td><td>391 130 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	103.49	-----	-----	89.30	35.76	11.07	32.64
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5111.06	53.32	74.00	-20.68	39.05	35.78	11.11	32.62	391 130 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5180.00	103.49	-----	-----	89.30	35.76	11.07	32.64	391 130 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-02-22  Frequency (MHz)					Level (dBuV/m) Date: 2025-02-22  Frequency (MHz)																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5063.36</td><td>43.10</td><td>54.00</td><td>-10.90</td><td>28.78</td><td>35.80</td><td>11.13</td><td>32.61</td><td>391 130 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5063.36	43.10	54.00	-10.90	28.78	35.80	11.13	32.61	391 130 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>94.72</td><td>-----</td><td>-----</td><td>80.53</td><td>35.76</td><td>11.07</td><td>32.64</td><td>391 130 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	94.72	-----	-----	80.53	35.76	11.07	32.64
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5063.36	43.10	54.00	-10.90	28.78	35.80	11.13	32.61	391 130 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5180.00	94.72	-----	-----	80.53	35.76	11.07	32.64	391 130 AVERAGE																																																																																

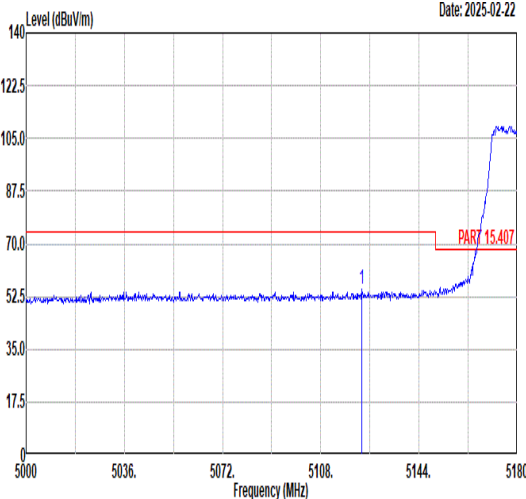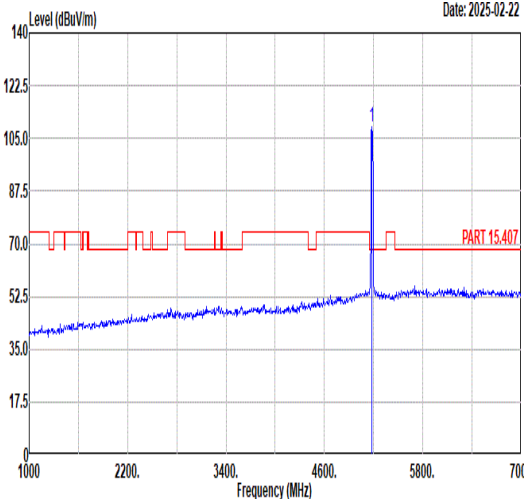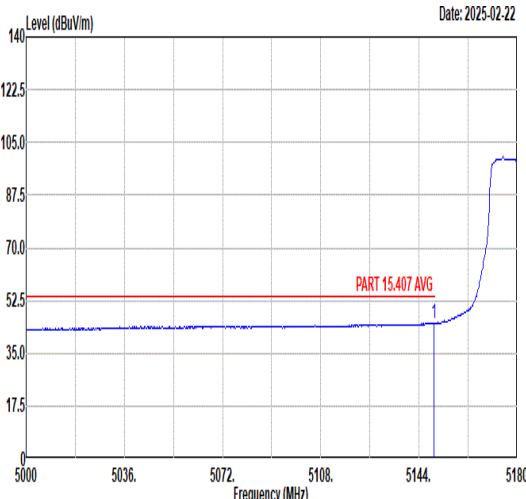
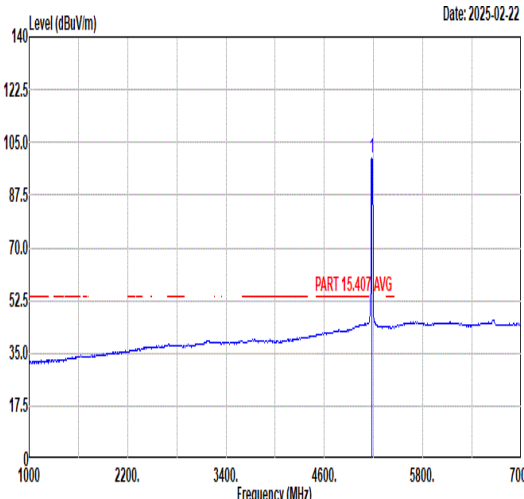


		31																																																																														
Mode		Band Edge																																																																														
		U-NII-1_5.25-5.35_802.11ax HE20_CH36_5180MHz																																																																														
ANT		1+2																																																																														
Pol.		Vertical					Fundamental																																																																									
Peak																																																																																
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5123.12	54.82	74.00	-19.18	40.59	35.75	11.10	32.62	193	175 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5180.00</td><td>109.04</td><td>-----</td><td>-----</td><td>94.86</td><td>35.75</td><td>11.07</td><td>32.64</td><td>193</td><td>175 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5180.00	109.04	-----	-----	94.86	35.75	11.07	32.64	193
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5123.12	54.82	74.00	-19.18	40.59	35.75	11.10	32.62	193	175 PEAK																																																																							
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5180.00	109.04	-----	-----	94.86	35.75	11.07	32.64	193	175 PEAK																																																																							
Avg																																																																																
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5149.58	45.16	54.00	-8.84	31.00	35.70	11.09	32.63	193	175 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5180.00</td><td>99.64</td><td>-----</td><td>-----</td><td>85.46</td><td>35.75</td><td>11.07</td><td>32.64</td><td>193</td><td>175 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5180.00	99.64	-----	-----	85.46	35.75	11.07	32.64	193
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5149.58	45.16	54.00	-8.84	31.00	35.70	11.09	32.63	193	175 AVERAGE																																																																							
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5180.00	99.64	-----	-----	85.46	35.75	11.07	32.64	193	175 AVERAGE																																																																							

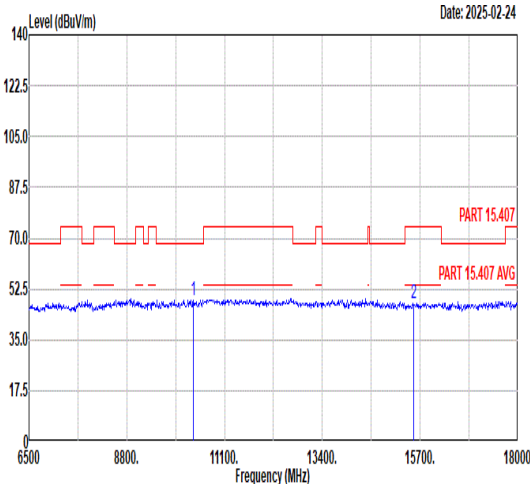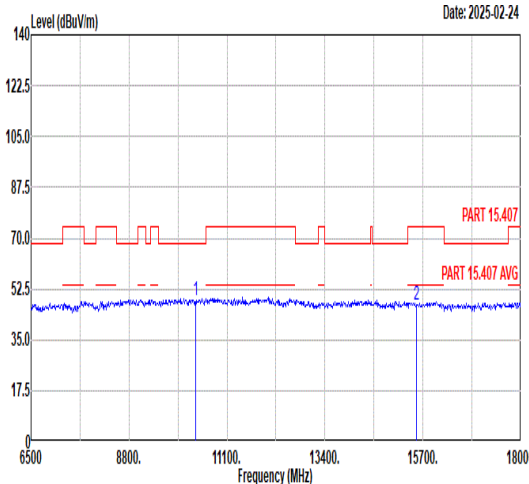

Mode	31																																																																																																																					
	Harmonic																																																																																																																					
	U-NII-1_5.25-5.35_802.11ax HE20_CH36_5180MHz																																																																																																																					
ANT	1+2																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																															
Peak Avg																																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10360.00</td><td>48.43</td><td>68.30</td><td>-19.87</td><td>47.61</td><td>38.10</td><td>14.15</td><td>51.43</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.36</td><td>74.00</td><td>-26.64</td><td>42.10</td><td>40.60</td><td>16.85</td><td>52.19</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	48.43	68.30	-19.87	47.61	38.10	14.15	51.43	---	---	Peak	2	15540.00	47.36	74.00	-26.64	42.10	40.60	16.85	52.19	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10360.00</td><td>48.83</td><td>68.30</td><td>-19.47</td><td>48.01</td><td>38.10</td><td>14.15</td><td>51.43</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.08</td><td>74.00</td><td>-26.92</td><td>41.82</td><td>40.60</td><td>16.85</td><td>52.19</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	48.83	68.30	-19.47	48.01	38.10	14.15	51.43	---	---	Peak	2	15540.00	47.08	74.00	-26.92	41.82	40.60	16.85	52.19	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	10360.00	48.43	68.30	-19.87	47.61	38.10	14.15	51.43	---	---	Peak																																																																																																											
2	15540.00	47.36	74.00	-26.64	42.10	40.60	16.85	52.19	---	---	Peak																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	10360.00	48.83	68.30	-19.47	48.01	38.10	14.15	51.43	---	---	Peak																																																																																																											
2	15540.00	47.08	74.00	-26.92	41.82	40.60	16.85	52.19	---	---	Peak																																																																																																											

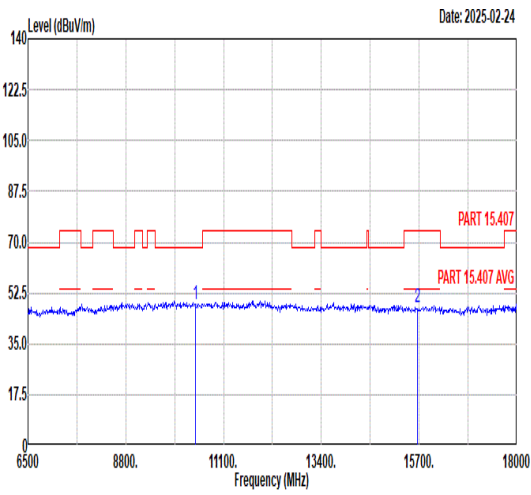
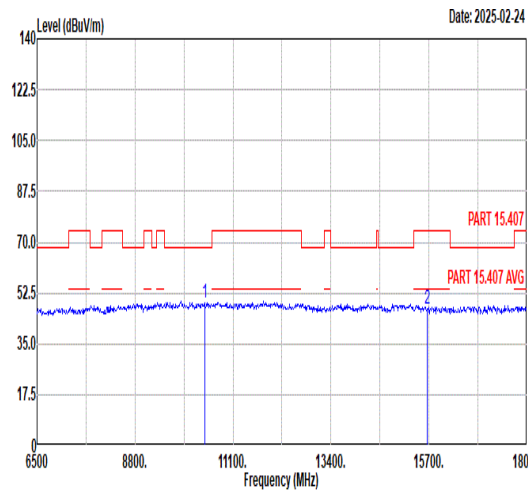


Mode	32																																																																																											
	Harmonic																																																																																											
	U-NII-1_5.25-5.35_802.11ax HE20_CH44_5220MHz																																																																																											
ANT	1+2																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 10440.00</td><td>48.63</td><td>68.30</td><td>-19.67</td><td>47.70</td><td>38.14</td><td>14.20</td><td>51.41</td></tr><tr><td>2 15660.00</td><td>47.49</td><td>74.00</td><td>-26.51</td><td>42.40</td><td>40.60</td><td>16.94</td><td>52.45</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 10440.00	48.63	68.30	-19.67	47.70	38.14	14.20	51.41	2 15660.00	47.49	74.00	-26.51	42.40	40.60	16.94	52.45	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 10440.00</td><td>49.10</td><td>68.30</td><td>-19.20</td><td>48.17</td><td>38.14</td><td>14.20</td><td>51.41</td></tr><tr><td>2 15660.00</td><td>47.09</td><td>74.00</td><td>-26.91</td><td>42.00</td><td>40.60</td><td>16.94</td><td>52.45</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 10440.00	49.10	68.30	-19.20	48.17	38.14	14.20	51.41	2 15660.00	47.09	74.00	-26.91	42.00	40.60	16.94	52.45
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																					
1 10440.00	48.63	68.30	-19.67	47.70	38.14	14.20	51.41																																																																																					
2 15660.00	47.49	74.00	-26.51	42.40	40.60	16.94	52.45																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																					
1 10440.00	49.10	68.30	-19.20	48.17	38.14	14.20	51.41																																																																																					
2 15660.00	47.09	74.00	-26.91	42.00	40.60	16.94	52.45																																																																																					
Peak						Peak																																																																																						





Mode	33																																																																															
	Harmonic																																																																															
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_5240MHz																																																																															
ANT	1+2																																																																															
Pol.	Horizontal								Vertical																																																																							
Peak Avg	Date: 2025-02-24								Date: 2025-02-24																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10480.00</td><td>47.96</td><td>68.30</td><td>-20.34</td><td>46.95</td><td>38.18</td><td>14.23</td></tr><tr><td>2</td><td>15720.00</td><td>47.90</td><td>74.00</td><td>-26.10</td><td>42.87</td><td>40.62</td><td>16.99</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10480.00	47.96	68.30	-20.34	46.95	38.18	14.23	2	15720.00	47.90	74.00	-26.10	42.87	40.62	16.99	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10480.00</td><td>48.19</td><td>68.30</td><td>-20.11</td><td>47.18</td><td>38.18</td><td>14.23</td></tr><tr><td>2</td><td>15720.00</td><td>47.54</td><td>74.00</td><td>-26.46</td><td>42.51</td><td>40.62</td><td>16.99</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10480.00	48.19	68.30	-20.11	47.18	38.18	14.23	2	15720.00	47.54	74.00	-26.46	42.51	40.62	16.99
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																								
1	10480.00	47.96	68.30	-20.34	46.95	38.18	14.23																																																																									
2	15720.00	47.90	74.00	-26.10	42.87	40.62	16.99																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	10480.00	48.19	68.30	-20.11	47.18	38.18	14.23																																																																									
2	15720.00	47.54	74.00	-26.46	42.51	40.62	16.99																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10480.00</td><td>47.96</td><td>68.30</td><td>-20.34</td><td>46.95</td><td>38.18</td><td>14.23</td></tr><tr><td>2</td><td>15720.00</td><td>47.90</td><td>74.00</td><td>-26.10</td><td>42.87</td><td>40.62</td><td>16.99</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10480.00	47.96	68.30	-20.34	46.95	38.18	14.23	2	15720.00	47.90	74.00	-26.10	42.87	40.62	16.99	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10480.00</td><td>48.19</td><td>68.30</td><td>-20.11</td><td>47.18</td><td>38.18</td><td>14.23</td></tr><tr><td>2</td><td>15720.00</td><td>47.54</td><td>74.00</td><td>-26.46</td><td>42.51</td><td>40.62</td><td>16.99</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10480.00	48.19	68.30	-20.11	47.18	38.18	14.23	2	15720.00	47.54	74.00	-26.46	42.51	40.62	16.99	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	10480.00	47.96	68.30	-20.34	46.95	38.18	14.23																																																																									
2	15720.00	47.90	74.00	-26.10	42.87	40.62	16.99																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	10480.00	48.19	68.30	-20.11	47.18	38.18	14.23																																																																									
2	15720.00	47.54	74.00	-26.46	42.51	40.62	16.99																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10480.00</td><td>47.96</td><td>68.30</td><td>-20.34</td><td>46.95</td><td>38.18</td><td>14.23</td></tr><tr><td>2</td><td>15720.00</td><td>47.90</td><td>74.00</td><td>-26.10</td><td>42.87</td><td>40.62</td><td>16.99</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10480.00	47.96	68.30	-20.34	46.95	38.18	14.23	2	15720.00	47.90	74.00	-26.10	42.87	40.62	16.99	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>10480.00</td><td>48.19</td><td>68.30</td><td>-20.11</td><td>47.18</td><td>38.18</td><td>14.23</td></tr><tr><td>2</td><td>15720.00</td><td>47.54</td><td>74.00</td><td>-26.46</td><td>42.51</td><td>40.62</td><td>16.99</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	10480.00	48.19	68.30	-20.11	47.18	38.18	14.23	2	15720.00	47.54	74.00	-26.46	42.51	40.62	16.99	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	10480.00	47.96	68.30	-20.34	46.95	38.18	14.23																																																																									
2	15720.00	47.90	74.00	-26.10	42.87	40.62	16.99																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	10480.00	48.19	68.30	-20.11	47.18	38.18	14.23																																																																									
2	15720.00	47.54	74.00	-26.46	42.51	40.62	16.99																																																																									



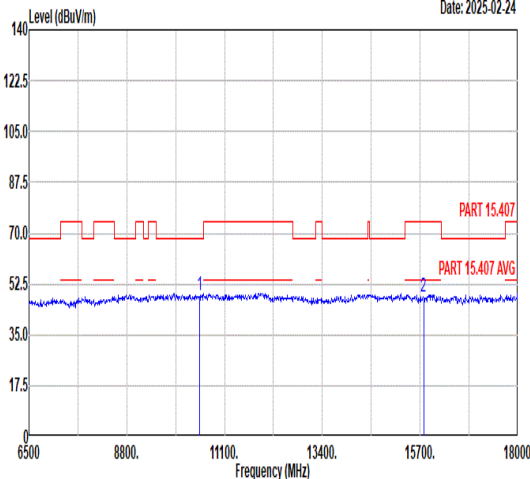
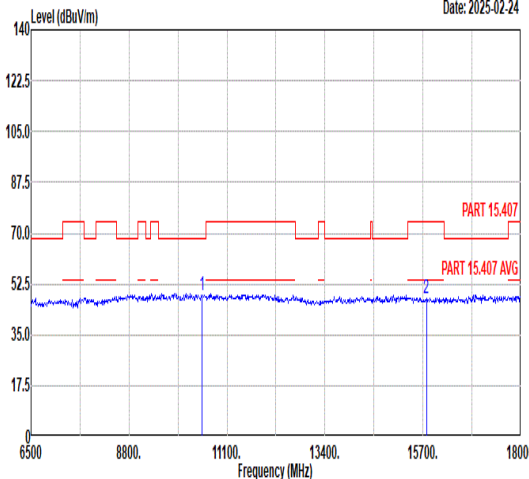


Mode	34																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_5260MHz																																																																																																																			
ANT	1+2																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10520.00</td><td>48.73</td><td>68.30</td><td>-19.57</td><td>47.66</td><td>38.20</td><td>14.25</td><td>51.38</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.98</td><td>74.00</td><td>-26.02</td><td>42.98</td><td>40.68</td><td>17.04</td><td>52.72</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	48.73	68.30	-19.57	47.66	38.20	14.25	51.38	---	---	Peak	2	15780.00	47.98	74.00	-26.02	42.98	40.68	17.04	52.72	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10520.00</td><td>48.87</td><td>68.30</td><td>-19.43</td><td>47.80</td><td>38.20</td><td>14.25</td><td>51.38</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.38</td><td>74.00</td><td>-26.62</td><td>42.38</td><td>40.68</td><td>17.04</td><td>52.72</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	48.87	68.30	-19.43	47.80	38.20	14.25	51.38	---	---	Peak	2	15780.00	47.38	74.00	-26.62	42.38	40.68	17.04	52.72	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10520.00	48.73	68.30	-19.57	47.66	38.20	14.25	51.38	---	---	Peak																																																																																																									
2	15780.00	47.98	74.00	-26.02	42.98	40.68	17.04	52.72	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10520.00	48.87	68.30	-19.43	47.80	38.20	14.25	51.38	---	---	Peak																																																																																																									
2	15780.00	47.38	74.00	-26.62	42.38	40.68	17.04	52.72	---	---	Peak																																																																																																									

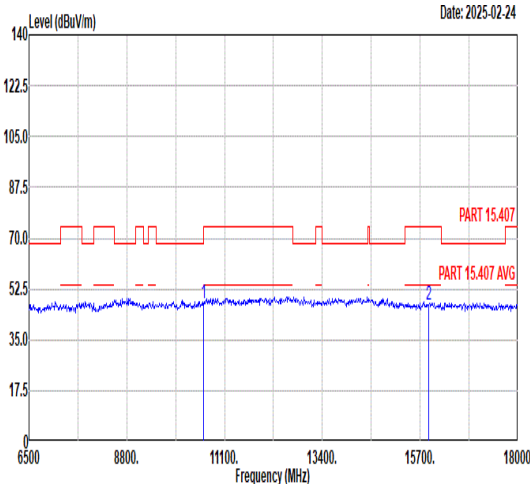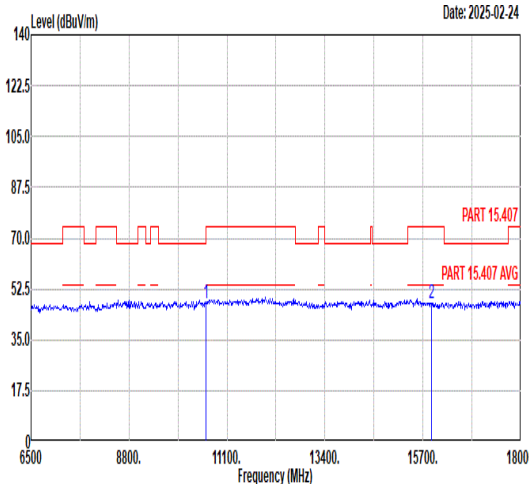

Mode	35																																																																																																					
	Harmonic																																																																																																					
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_5300MHz																																																																																																					
ANT	1+2																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10600.00</td><td>47.73</td><td>74.00</td><td>-26.27</td><td>46.53</td><td>38.20</td><td>14.30</td><td>51.30 --- --- Peak</td></tr><tr><td>2</td><td>15900.00</td><td>47.17</td><td>74.00</td><td>-26.83</td><td>42.11</td><td>40.90</td><td>17.14</td><td>52.98 --- --- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10600.00	47.73	74.00	-26.27	46.53	38.20	14.30	51.30 --- --- Peak	2	15900.00	47.17	74.00	-26.83	42.11	40.90	17.14	52.98 --- --- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10600.00</td><td>47.77</td><td>74.00</td><td>-26.23</td><td>46.57</td><td>38.20</td><td>14.30</td><td>51.30 --- --- Peak</td></tr><tr><td>2</td><td>15900.00</td><td>47.40</td><td>74.00</td><td>-26.60</td><td>42.34</td><td>40.90</td><td>17.14</td><td>52.98 --- --- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10600.00	47.77	74.00	-26.23	46.57	38.20	14.30	51.30 --- --- Peak	2	15900.00	47.40	74.00	-26.60	42.34	40.90	17.14	52.98 --- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	10600.00	47.73	74.00	-26.27	46.53	38.20	14.30	51.30 --- --- Peak																																																																																														
2	15900.00	47.17	74.00	-26.83	42.11	40.90	17.14	52.98 --- --- Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	10600.00	47.77	74.00	-26.23	46.57	38.20	14.30	51.30 --- --- Peak																																																																																														
2	15900.00	47.40	74.00	-26.60	42.34	40.90	17.14	52.98 --- --- Peak																																																																																														

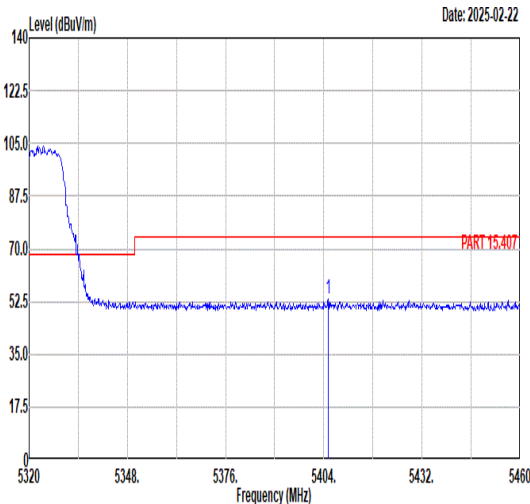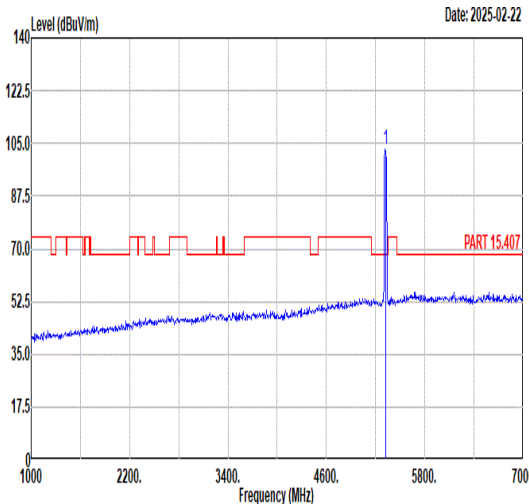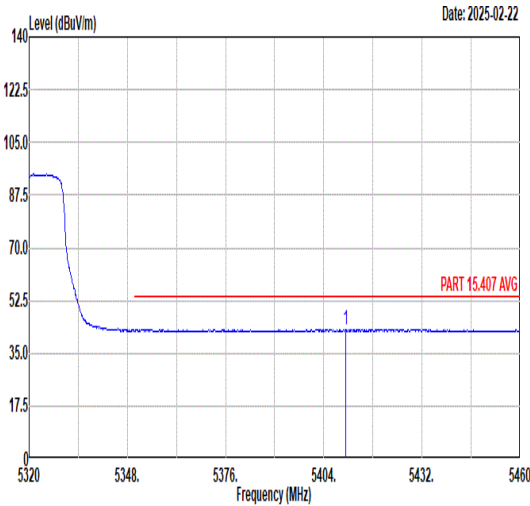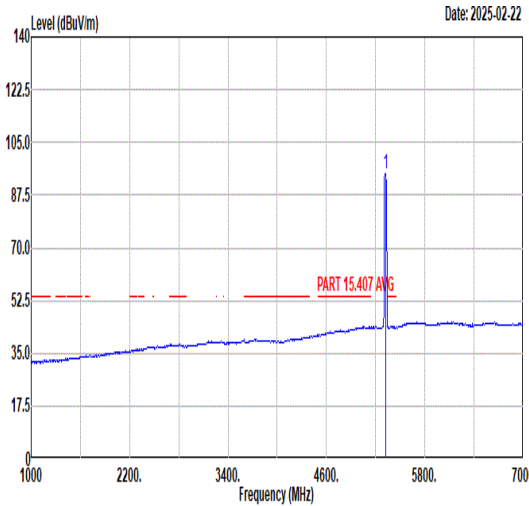

		36																																																																															
Mode		Band Edge																																																																															
		U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz																																																																															
ANT		1+2																																																																															
Pol.		Horizontal					Fundamental																																																																										
Peak	 Level (dBuV/m) Date: 2025-02-22 15407					 Level (dBuV/m) Date: 2025-02-22 15407																																																																											
	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5405.26</td><td>53.34</td><td>74.00</td><td>-20.66</td><td>39.13</td><td>35.99</td><td>10.90</td><td>32.68</td><td>391 116 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5405.26	53.34	74.00	-20.66	39.13	35.99	10.90	32.68	391 116 PEAK	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5320.00</td><td>102.85</td><td>-----</td><td>-----</td><td>88.66</td><td>35.88</td><td>10.97</td><td>32.66</td><td>391 116 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	102.85	-----	-----	88.66	35.88	10.97	32.66
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5405.26	53.34	74.00	-20.66	39.13	35.99	10.90	32.68	391 116 PEAK																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5320.00	102.85	-----	-----	88.66	35.88	10.97	32.66	391 116 PEAK																																																																									
Avg	 Level (dBuV/m) Date: 2025-02-22 15407 AVG					 Level (dBuV/m) Date: 2025-02-22 15407 AVG																																																																											
	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5410.16</td><td>42.89</td><td>54.00</td><td>-11.11</td><td>28.68</td><td>35.98</td><td>10.91</td><td>32.68</td><td>391 115 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5410.16	42.89	54.00	-11.11	28.68	35.98	10.91	32.68	391 115 AVERAGE	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5320.00</td><td>94.51</td><td>-----</td><td>-----</td><td>80.32</td><td>35.88</td><td>10.97</td><td>32.66</td><td>391 116 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	94.51	-----	-----	80.32	35.88	10.97	32.66
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5410.16	42.89	54.00	-11.11	28.68	35.98	10.91	32.68	391 115 AVERAGE																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5320.00	94.51	-----	-----	80.32	35.88	10.97	32.66	391 116 AVERAGE																																																																									



Mode	36																																																																															
	Band Edge																																																																															
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz																																																																															
ANT	1+2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2025-02-22 1 5407.22 54.62 74.00 -19.38 40.41 35.99 10.90 32.68 147 171 PEAK <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5407.22</td><td>54.62</td><td>74.00</td><td>-19.38</td><td>40.41</td><td>35.99</td><td>10.90</td><td>32.68</td><td>147</td><td>171</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5407.22	54.62	74.00	-19.38	40.41	35.99	10.90	32.68	147	171	PEAK	Level (dBuV/m) Date: 2025-02-22 1 5320.00 108.79 ----- 94.56 35.92 10.97 32.66 147 171 PEAK <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>108.79</td><td>-----</td><td>-----</td><td>94.56</td><td>35.92</td><td>10.97</td><td>32.66</td><td>147</td><td>171</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	108.79	-----	-----	94.56	35.92	10.97	32.66	147	171	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5407.22	54.62	74.00	-19.38	40.41	35.99	10.90	32.68	147	171	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5320.00	108.79	-----	-----	94.56	35.92	10.97	32.66	147	171	PEAK																																																																					
Avg	Level (dBuV/m) Date: 2025-02-22 1 5350.66 44.68 54.00 -9.32 30.31 36.10 10.94 32.67 147 171 AVERAGE <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.66</td><td>44.68</td><td>54.00</td><td>-9.32</td><td>30.31</td><td>36.10</td><td>10.94</td><td>32.67</td><td>147</td><td>171</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.66	44.68	54.00	-9.32	30.31	36.10	10.94	32.67	147	171	AVERAGE	Level (dBuV/m) Date: 2025-02-22 1 5320.00 99.29 ----- 85.04 35.96 10.96 32.67 147 171 AVERAGE <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>99.29</td><td>-----</td><td>-----</td><td>85.04</td><td>35.96</td><td>10.96</td><td>32.67</td><td>147</td><td>171</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	99.29	-----	-----	85.04	35.96	10.96	32.67	147	171	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5350.66	44.68	54.00	-9.32	30.31	36.10	10.94	32.67	147	171	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5320.00	99.29	-----	-----	85.04	35.96	10.96	32.67	147	171	AVERAGE																																																																					



Mode	36																																																																																															
	Harmonic																																																																																															
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz																																																																																															
ANT	1+2																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg	Date: 2025-02-24								Date: 2025-02-24																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>10640.00</td><td>47.88</td><td>74.00</td><td>-26.12</td><td>46.66</td><td>38.16</td><td>14.32</td></tr><tr><td>2</td><td>15960.00</td><td>47.15</td><td>74.00</td><td>-26.85</td><td>42.05</td><td>41.02</td><td>17.19</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	47.88	74.00	-26.12	46.66	38.16	14.32	2	15960.00	47.15	74.00	-26.85	42.05	41.02	17.19	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>10640.00</td><td>47.84</td><td>74.00</td><td>-26.16</td><td>46.62</td><td>38.16</td><td>14.32</td></tr><tr><td>2</td><td>15960.00</td><td>47.79</td><td>74.00</td><td>-26.21</td><td>42.69</td><td>41.02</td><td>17.19</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	47.84	74.00	-26.16	46.62	38.16	14.32	2	15960.00	47.79	74.00	-26.21	42.69	41.02	17.19
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	10640.00	47.88	74.00	-26.12	46.66	38.16	14.32																																																																																									
2	15960.00	47.15	74.00	-26.85	42.05	41.02	17.19																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	10640.00	47.84	74.00	-26.16	46.62	38.16	14.32																																																																																									
2	15960.00	47.79	74.00	-26.21	42.69	41.02	17.19																																																																																									
<table><thead><tr><th></th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>Peak</td></tr><tr><td>2</td><td>Peak</td></tr></tbody></table>									Remark	1	Peak	2	Peak	<table><thead><tr><th></th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>Peak</td></tr><tr><td>2</td><td>Peak</td></tr></tbody></table>									Remark	1	Peak	2	Peak																																																																					
	Remark																																																																																															
1	Peak																																																																																															
2	Peak																																																																																															
	Remark																																																																																															
1	Peak																																																																																															
2	Peak																																																																																															



Mode	37																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz																																																																																											
ANT	1+2																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5358.25</td><td>52.82</td><td>74.00</td><td>-21.18</td><td>38.47</td><td>36.08</td><td>10.94</td><td>32.67</td><td>400</td><td>132</td><td>PEAK</td></tr><tr><td>2</td><td>5464.60</td><td>52.91</td><td>68.30</td><td>-15.39</td><td>38.50</td><td>35.96</td><td>11.14</td><td>32.69</td><td>400</td><td>132</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5358.25	52.82	74.00	-21.18	38.47	36.08	10.94	32.67	400	132	PEAK	2	5464.60	52.91	68.30	-15.39	38.50	35.96	11.14	32.69	400	132	PEAK	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>103.79</td><td>-----</td><td>-----</td><td>89.10</td><td>36.10</td><td>11.29</td><td>32.70</td><td>400</td><td>132</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	103.79	-----	-----	89.10	36.10	11.29	32.70	400	132	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5358.25	52.82	74.00	-21.18	38.47	36.08	10.94	32.67	400	132	PEAK																																																																																	
2	5464.60	52.91	68.30	-15.39	38.50	35.96	11.14	32.69	400	132	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5500.00	103.79	-----	-----	89.10	36.10	11.29	32.70	400	132	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5458.60</td><td>42.74</td><td>54.00</td><td>-11.26</td><td>28.39</td><td>35.93</td><td>11.11</td><td>32.69</td><td>400</td><td>132</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5458.60	42.74	54.00	-11.26	28.39	35.93	11.11	32.69	400	132	AVERAGE	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>94.36</td><td>-----</td><td>-----</td><td>79.72</td><td>36.08</td><td>11.26</td><td>32.70</td><td>400</td><td>132</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	94.36	-----	-----	79.72	36.08	11.26	32.70	400	132	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5458.60	42.74	54.00	-11.26	28.39	35.93	11.11	32.69	400	132	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5500.00	94.36	-----	-----	79.72	36.08	11.26	32.70	400	132	AVERAGE																																																																																	





Mode	37																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz																																																																																											
ANT	1+2																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5394.10</td><td>54.26</td><td>74.00</td><td>-19.74</td><td>40.02</td><td>36.01</td><td>10.91</td><td>32.68</td><td>147 174 PEAK</td></tr><tr><td>2</td><td>5469.40</td><td>54.86</td><td>68.30</td><td>-13.44</td><td>40.41</td><td>35.98</td><td>11.16</td><td>32.69</td><td>147 174 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5394.10	54.26	74.00	-19.74	40.02	36.01	10.91	32.68	147 174 PEAK	2	5469.40	54.86	68.30	-13.44	40.41	35.98	11.16	32.69	147 174 PEAK	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>108.62</td><td>-----</td><td>-----</td><td>93.93</td><td>36.10</td><td>11.29</td><td>32.70</td><td>147 174 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	108.62	-----	-----	93.93	36.10	11.29	32.70	147 174 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5394.10	54.26	74.00	-19.74	40.02	36.01	10.91	32.68	147 174 PEAK																																																																																			
2	5469.40	54.86	68.30	-13.44	40.41	35.98	11.16	32.69	147 174 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5500.00	108.62	-----	-----	93.93	36.10	11.29	32.70	147 174 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5456.95</td><td>44.47</td><td>54.00</td><td>-9.53</td><td>30.12</td><td>35.93</td><td>11.11</td><td>32.69</td><td>147 174 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5456.95	44.47	54.00	-9.53	30.12	35.93	11.11	32.69	147 174 AVERAGE	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>99.30</td><td>-----</td><td>-----</td><td>84.61</td><td>36.10</td><td>11.29</td><td>32.70</td><td>147 174 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	99.30	-----	-----	84.61	36.10	11.29	32.70	147 174 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5456.95	44.47	54.00	-9.53	30.12	35.93	11.11	32.69	147 174 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5500.00	99.30	-----	-----	84.61	36.10	11.29	32.70	147 174 AVERAGE																																																																																			



Mode	37																																																																									
	Harmonic																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz																																																																									
ANT	1+2																																																																									
Pol.	Horizontal	Vertical																																																																								
Peak Avg	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>11000.00</td><td>47.00</td><td>74.00</td><td>-27.00</td><td>45.36</td><td>38.00</td><td>14.54</td><td>50.90 --- --- Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.49</td><td>68.30</td><td>-19.81</td><td>43.03</td><td>41.20</td><td>17.36</td><td>53.10 --- --- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	11000.00	47.00	74.00	-27.00	45.36	38.00	14.54	50.90 --- --- Peak	2	16500.00	48.49	68.30	-19.81	43.03	41.20	17.36	53.10 --- --- Peak	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>11000.00</td><td>46.96</td><td>74.00</td><td>-27.04</td><td>45.32</td><td>38.00</td><td>14.54</td><td>50.90 --- --- Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.13</td><td>68.30</td><td>-20.17</td><td>42.67</td><td>41.20</td><td>17.36</td><td>53.10 --- --- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	11000.00	46.96	74.00	-27.04	45.32	38.00	14.54	50.90 --- --- Peak	2	16500.00	48.13	68.30	-20.17	42.67	41.20	17.36	53.10 --- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																	
1	11000.00	47.00	74.00	-27.00	45.36	38.00	14.54	50.90 --- --- Peak																																																																		
2	16500.00	48.49	68.30	-19.81	43.03	41.20	17.36	53.10 --- --- Peak																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																		
1	11000.00	46.96	74.00	-27.04	45.32	38.00	14.54	50.90 --- --- Peak																																																																		
2	16500.00	48.13	68.30	-20.17	42.67	41.20	17.36	53.10 --- --- Peak																																																																		

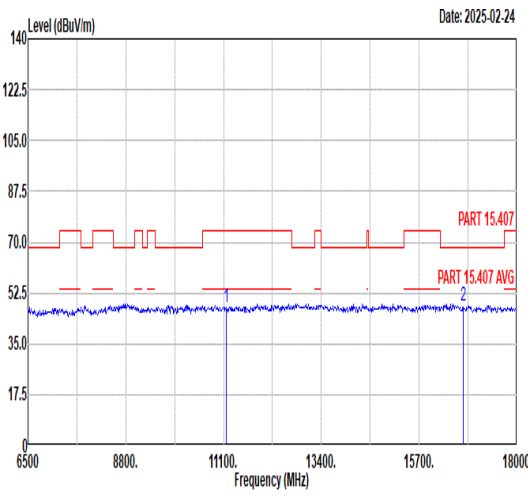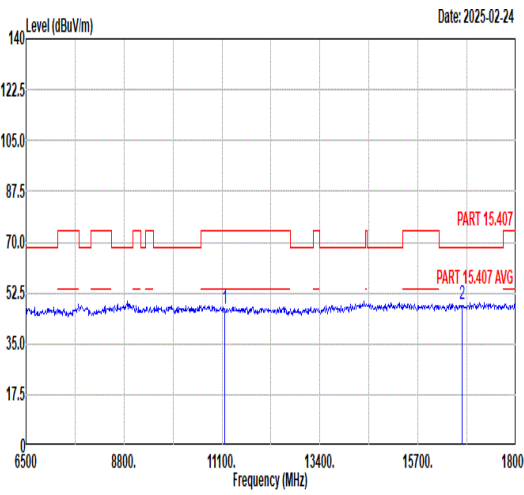

Mode	38																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_5580MHz																																																																																																																																	
ANT	1+2																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>47.29</td><td>74.00</td><td>-26.71</td><td>45.30</td><td>38.06</td><td>14.64</td><td>50.71</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>48.08</td><td>68.30</td><td>-20.22</td><td>42.02</td><td>41.44</td><td>17.43</td><td>52.81</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11160.00	47.29	74.00	-26.71	45.30	38.06	14.64	50.71	---	---	Peak	2	16740.00	48.08	68.30	-20.22	42.02	41.44	17.43	52.81	---	---	Peak	<table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>47.24</td><td>74.00</td><td>-26.76</td><td>45.25</td><td>38.06</td><td>14.64</td><td>50.71</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>48.62</td><td>68.30</td><td>-19.68</td><td>42.56</td><td>41.44</td><td>17.43</td><td>52.81</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11160.00	47.24	74.00	-26.76	45.25	38.06	14.64	50.71	---	---	Peak	2	16740.00	48.62	68.30	-19.68	42.56	41.44	17.43	52.81	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11160.00	47.29	74.00	-26.71	45.30	38.06	14.64	50.71	---	---	Peak																																																																																																																							
2	16740.00	48.08	68.30	-20.22	42.02	41.44	17.43	52.81	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11160.00	47.24	74.00	-26.76	45.25	38.06	14.64	50.71	---	---	Peak																																																																																																																							
2	16740.00	48.62	68.30	-19.68	42.56	41.44	17.43	52.81	---	---	Peak																																																																																																																							



Mode	39																																																																																			
	Band Edge																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHz																																																																																			
ANT	1+2																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5726.59</td><td>54.31</td><td>68.30</td><td>-13.99</td><td>38.80</td><td>36.65</td><td>11.65</td><td>32.79</td><td>387</td><td>124 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5726.59	54.31	68.30	-13.99	38.80	36.65	11.65	32.79	387	124 PEAK	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>104.28</td><td>-----</td><td>-----</td><td>88.79</td><td>36.60</td><td>11.67</td><td>32.78</td><td>387</td><td>124 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	104.28	-----	-----	88.79	36.60	11.67	32.78	387	124 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5726.59	54.31	68.30	-13.99	38.80	36.65	11.65	32.79	387	124 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	104.28	-----	-----	88.79	36.60	11.67	32.78	387	124 PEAK																																																																										
Avg	Blank	Level (dBuV/m) Date: 2025-02-22 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>94.84</td><td>-----</td><td>-----</td><td>79.37</td><td>36.58</td><td>11.67</td><td>32.78</td><td>387</td><td>124 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	94.84	-----	-----	79.37	36.58	11.67	32.78	387	124 AVERAGE																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	94.84	-----	-----	79.37	36.58	11.67	32.78	387	124 AVERAGE																																																																										