



# MEASUREMENT REPORT

## FCC PART 15.407 WLAN 802.11a/n/ac

---

**FCC ID:** 2AI9TOAW-AP1201

**APPLICANT:** ALE USA Inc.

**Application Type:** Certification

**Product:** OmniAccess Stellar

**Model No.:** OAW-AP1201

**Brand Name:** Alcatel-Lucent Enterprise


**FCC Classification:** Unlicensed National Information Infrastructure (NII)

**FCC Rule Part(s):** Part15 Subpart E (Section 15.407)

**Test Procedure(s):** ANSI C63.10-2013, KDB 789033 D02v02r01,  
KDB 662911 D01v02r01

**Test Date:** September 06 ~ November 27, 2018

Reviewed By:   
( Sunny Sun )

Approved By:   
( Robin Wu )



This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

## Revision History

| Report No.    | Version | Description                                | Issue Date | Note    |
|---------------|---------|--------------------------------------------|------------|---------|
| 1810RSU015-U6 | Rev. 01 | Initial Report                             | 10-31-2018 | Invalid |
| 1810RSU015-U6 | Rev. 02 | Added the test result of Radiated Bandedge | 11-28-2018 | Valid   |

Note: This report is supplemented to MRT Original “1808RSU025-U6” Report updating applicant, product name and model number.

## CONTENTS

| Description                                               | Page      |
|-----------------------------------------------------------|-----------|
| <b>§2.1033 General Information .....</b>                  | <b>6</b>  |
| <b>1. INTRODUCTION .....</b>                              | <b>7</b>  |
| 1.1. Scope .....                                          | 7         |
| 1.2. MRT Test Location.....                               | 7         |
| <b>2. PRODUCT INFORMATION .....</b>                       | <b>8</b>  |
| 2.1. Equipment Description .....                          | 8         |
| 2.2. Product Specification Subjective to this Report..... | 8         |
| 2.3. Working Frequencies for this report .....            | 9         |
| 2.4. Description of Available Antenna.....                | 10        |
| 2.5. Description of Antenna RF Port.....                  | 11        |
| 2.6. Test Mode.....                                       | 11        |
| 2.7. Description of Test Software.....                    | 12        |
| 2.8. Device Capabilities .....                            | 12        |
| 2.9. Test Configuration.....                              | 13        |
| 2.10. EMI Suppression Device(s)/Modifications .....       | 13        |
| 2.11. Labeling Requirements .....                         | 14        |
| <b>3. DESCRIPTION OF TEST.....</b>                        | <b>15</b> |
| 3.1. Evaluation Procedure.....                            | 15        |
| 3.2. AC Line Conducted Emissions.....                     | 15        |
| 3.3. Radiated Emissions .....                             | 16        |
| <b>4. ANTENNA REQUIREMENTS .....</b>                      | <b>17</b> |
| <b>5. TEST EQUIPMENT CALIBRATION DATE .....</b>           | <b>18</b> |
| <b>6. MEASUREMENT UNCERTAINTY .....</b>                   | <b>19</b> |
| <b>7. TEST RESULT.....</b>                                | <b>20</b> |
| 7.1. Summary .....                                        | 20        |
| 7.2. 26dB Bandwidth Measurement .....                     | 21        |
| 7.2.1. Test Limit .....                                   | 21        |
| 7.2.2. Test Procedure used .....                          | 21        |
| 7.2.3. Test Setting .....                                 | 21        |
| 7.2.4. Test Setup.....                                    | 21        |
| 7.2.5. Test Result .....                                  | 22        |
| 7.3. Output Power Measurement .....                       | 29        |
| 7.3.1. Test Limit .....                                   | 29        |

|                                                      |     |
|------------------------------------------------------|-----|
| 7.3.2. Test Procedure Used .....                     | 29  |
| 7.3.3. Test Setting .....                            | 29  |
| 7.3.4. Test Setup.....                               | 29  |
| 7.3.5. Test Result .....                             | 30  |
| 7.4. Transmit Power Control .....                    | 33  |
| 7.4.1. Test Limit .....                              | 33  |
| 7.4.2. Test Procedure Used .....                     | 33  |
| 7.4.3. Test Setting .....                            | 33  |
| 7.4.4. Test Setup.....                               | 33  |
| 7.4.5. Test Result .....                             | 34  |
| 7.5. Power Spectral Density Measurement .....        | 36  |
| 7.5.1. Test Limit .....                              | 36  |
| 7.5.2. Test Procedure Used .....                     | 36  |
| 7.5.3. Test Setting .....                            | 36  |
| 7.5.4. Test Setup.....                               | 37  |
| 7.5.5. Test Result .....                             | 38  |
| 7.6. Frequency Stability Measurement .....           | 60  |
| 7.6.1. Test Limit .....                              | 60  |
| 7.6.2. Test Procedure Used .....                     | 60  |
| 7.6.3. Test Setup.....                               | 61  |
| 7.6.4. Test Result .....                             | 62  |
| 7.7. Radiated Spurious Emission Measurement.....     | 63  |
| 7.7.1. Test Limit .....                              | 63  |
| 7.7.2. Test Procedure Used .....                     | 63  |
| 7.7.3. Test Setting .....                            | 63  |
| 7.7.4. Test Setup.....                               | 65  |
| 7.7.5. Test Result .....                             | 68  |
| 7.8. Radiated Restricted Band Edge Measurement ..... | 111 |
| 7.8.1. Test Limit .....                              | 111 |
| 7.8.2. Test Procedure Used .....                     | 112 |
| 7.8.3. Test Setting .....                            | 112 |
| 7.8.4. Test Setup.....                               | 113 |
| 7.8.5. Test Result .....                             | 115 |
| 7.9. AC Conducted Emissions Measurement.....         | 213 |
| 7.9.1. Test Limit .....                              | 213 |
| 7.9.2. Test Procedure.....                           | 213 |
| 7.9.3. Test Setup.....                               | 214 |
| 7.9.4. Test Result .....                             | 215 |

|                                                |            |
|------------------------------------------------|------------|
| <b>8. CONCLUSION.....</b>                      | <b>217</b> |
| <b>Appendix A – Test Setup Photograph.....</b> | <b>218</b> |
| <b>Appendix B – EUT Photograph .....</b>       | <b>219</b> |

## §2.1033 General Information

|                                |                                                                                                                                 |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant:</b>              | ALE USA Inc.                                                                                                                    |
| <b>Applicant Address:</b>      | 26801 West Agoura Road, Calabasas, CA 91301, United States.                                                                     |
| <b>Manufacturer:</b>           | ALE USA Inc.                                                                                                                    |
| <b>Manufacturer Address:</b>   | 26801 West Agoura Road, Calabasas, CA 91301, United States.                                                                     |
| <b>Test Site:</b>              | MRT Technology (Suzhou) Co., Ltd                                                                                                |
| <b>Test Site Address:</b>      | D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China                                              |
| <b>MRT Registration No.:</b>   | 893164                                                                                                                          |
| <b>Test Device Serial No.:</b> | N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering |

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

|                          |                                                                                                     |
|--------------------------|-----------------------------------------------------------------------------------------------------|
| Product Name:            | OmniAccess Stellar                                                                                  |
| Model No.:               | OAW-AP1201                                                                                          |
| Brand Name:              | Alcatel-Lucent Enterprise                                                                           |
| Wi-Fi Specification      | 802.11a/b/g/n/ac                                                                                    |
| Bluetooth Specification: | v5.0                                                                                                |
| Operating Temperature:   | 0 ~ 45 °C                                                                                           |
| Power Type:              | POE input or AC adapter input                                                                       |
| Operating Environment:   | Indoor Use                                                                                          |
| <b>Accessories</b>       |                                                                                                     |
| Adapter 1#               | Model No.: ADP-30HR B<br>Input Power: 100 - 240V ~ 50/60Hz, 1.0A<br>Output Power: 48VDC/0.66A       |
| Adapter 2#               | Model No.: PD-9001 GR/AT/AC<br>Input Power: 100 - 240V ~ 50/60Hz, 0.67A<br>Output Power: 55VDC/0.6A |

### 2.2. Product Specification Subjective to this Report

|                    |                                                                                                                                                                                      |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency Range    | For 802.11a/n-HT20/ac-VHT20:<br>5260~5320MHz, 5500~5720MHz<br>For 802.11n-HT40/ac-VHT40:<br>5270~5310MHz, 5510~5710MHz,<br>For 802.11ac-VHT80:<br>5290MHz, 5530MHz, 5610MHz, 5690MHz |
| Type of Modulation | 802.11a/n/ac: OFDM                                                                                                                                                                   |
| Data Rate          | 802.11a: 6/9/12/18/24/36/48/54Mbps<br>802.11n: up to 300Mbps<br>802.11ac: up to 866.6Mbps                                                                                            |

Note: For other features of this EUT, test report will be issued separately.

### 2.3. Working Frequencies for this report

#### 802.11a/n-HT20/ac-VHT20

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 52      | 5260 MHz  | 56      | 5280 MHz  | 60      | 5300 MHz  |
| 64      | 5320 MHz  | 100     | 5500 MHz  | 104     | 5520 MHz  |
| 108     | 5540 MHz  | 112     | 5560 MHz  | 116     | 5580 MHz  |
| 120     | 5600 MHz  | 124     | 5620 MHz  | 128     | 5640 MHz  |
| 132     | 5660 MHz  | 136     | 5680 MHz  | 140     | 5700 MHz  |
| 144     | 5720 MHz  | --      | --        | --      | --        |

#### 802.11n-HT40/ac-VHT40

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 54      | 5270 MHz  | 62      | 5310 MHz  | 102     | 5510 MHz  |
| 110     | 5550 MHz  | 118     | 5590 MHz  | 126     | 5630 MHz  |
| 134     | 5670 MHz  | 142     | 5710 MHz  | --      | --        |

#### 802.11ac-VHT80

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 58      | 5290 MHz  | 106     | 5530 MHz  | 122     | 5610 MHz  |
| 138     | 5690 MHz  | --      | --        | --      | --        |

## 2.4. Description of Available Antenna

| Antenna Type               | Frequency Band (GHz) | Tx Paths | Per Chain Max Antenna Gain (dBi) |       | Beam-Forming Directional Gain (dBi) | CDD Directional Gain(dBi) |         |
|----------------------------|----------------------|----------|----------------------------------|-------|-------------------------------------|---------------------------|---------|
|                            |                      |          | Ant 0                            | Ant 1 |                                     | For Power                 | For PSD |
|                            |                      |          |                                  |       |                                     |                           |         |
| Wi-Fi Internal Antenna     |                      |          |                                  |       |                                     |                           |         |
| PCB                        | 2412 ~ 2462          | 2        | 4.70                             | 3.70  | 7.22                                | 4.70                      | 7.71    |
|                            | 5150 ~ 5250          | 2        | 3.80                             | 3.00  | 6.42                                | 3.80                      | 6.81    |
|                            | 5250 ~ 5350          | 2        | 3.80                             | 3.00  | 6.42                                | 3.80                      | 6.81    |
|                            | 5470 ~ 5725          | 2        | 4.60                             | 3.80  | 7.22                                | 4.60                      | 7.61    |
|                            | 5725 ~ 5850          | 2        | 4.60                             | 3.00  | 6.85                                | 4.60                      | 7.61    |
| Bluetooth Internal Antenna |                      |          |                                  |       |                                     |                           |         |
| PCB                        | 2402 ~ 2480          | 1        | 3.70                             |       | --                                  |                           |         |

Note:

1. The EUT supports SISO technology for 802.11b mode only.
2. The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

For CDD transmissions, directional gain is calculated as follows,  $N_{ANT} = 2$ ,  $N_{SS} = 1$ .

If all antennas have the same gain,  $G_{ANT}$ , Directional gain =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,

Array Gain =  $10 \log (N_{ANT} / N_{SS})$  dB = 3.01;

- For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB for  $N_{ANT} \leq 4$ ;

If antenna gains are not equal, Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{ANT}$  set equal to the gain of the antenna having the highest gain.

The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac, not

include 802.11a/b/g. The directional gain =  $10 \log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$  dBi.

## 2.5. Description of Antenna RF Port

| Antenna RF Port       |                |       |              |       |
|-----------------------|----------------|-------|--------------|-------|
| --                    | 2.4GHz RF Port |       | 5GHz RF Port |       |
| Software Control Port | Ant 0          | Ant 1 | Ant 0        | Ant 1 |



## 2.6. Test Mode

|           |                                           |
|-----------|-------------------------------------------|
| Test Mode | Mode 1: Transmit by 802.11a (6Mbps)       |
|           | Mode 2: Transmit by 802.11ac-VHT20 (MSC0) |
|           | Mode 3: Transmit by 802.11ac-VHT40 (MSC0) |
|           | Mode 4: Transmit by 802.11ac-VHT80 (MSC0) |

| 5GHz Test Mode | Ant 0 + 1 |              |
|----------------|-----------|--------------|
|                | CDD       | Beam-Forming |
| 802.11a        | √         | ×            |
| 802.11n-HT20   | √         | √            |
| 802.11n-HT40   | √         | √            |
| 802.11ac-VHT20 | √         | √            |
| 802.11ac-VHT40 | √         | √            |
| 802.11ac-VHT80 | √         | √            |

## 2.7. Description of Test Software

The test utility software used during testing was “QRCT”, and the version was “3.0.211.0”.


## 2.8. Device Capabilities

This device contains the following capabilities:

2.4GHz WLAN (DTS), 5GHzWLAN (NII), Bluetooth (v5.0)

Note: 5GHz (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = average. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Test Mode      | Duty Cycle |
|----------------|------------|
| 802.11a        | 95.73 %    |
| 802.11n-HT20   | 98.06 %    |
| 802.11n-HT40   | 95.80 %    |
| 802.11ac-VHT20 | 97.84 %    |
| 802.11ac-VHT40 | 95.45 %    |
| 802.11ac-VHT80 | 91.99 %    |

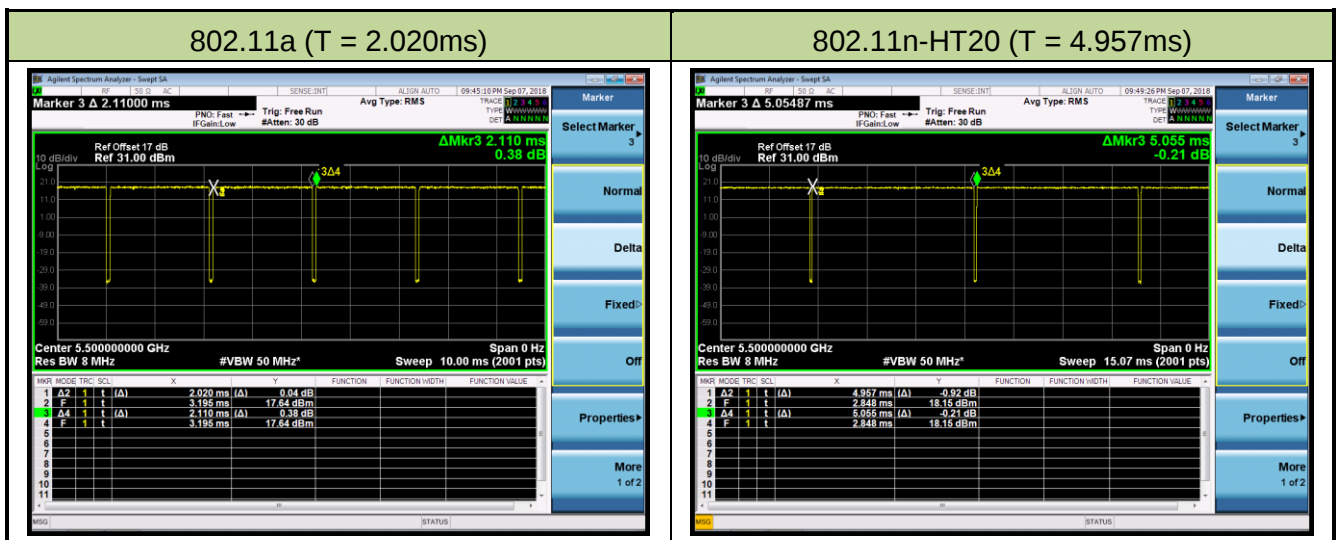



## 2.9. Test Configuration

The device was tested per the guidance of KDB 789033 D02v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.10. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## **2.11. Labeling Requirements**

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### 3. DESCRIPTION OF TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement.

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **OmniAccess Stellar** is **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The **OmniAccess Stellar** unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions - SR2

| Instrument                 | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|--------------|-------------|-------------|----------------|----------------|
| EMI Test Receiver          | R&S          | ESR3        | MRTSUE06185 | 1 year         | 2019/04/25     |
| Two-Line V-Network         | R&S          | ENV216      | MRTSUE06002 | 1 year         | 2019/06/21     |
| Two-Line V-Network         | R&S          | ENV216      | MRTSUE06003 | 1 year         | 2019/06/21     |
| Thermohygrometer           | Testo        | 608-H1      | MRTSUE06404 | 1 year         | 2019/08/14     |
| Shielding Anechoic Chamber | Mikebang     | Chamber-TR3 | MRTSUE06215 | 1 year         | 2019/05/10     |

### Radiated Disturbance - AC1

| Instrument                       | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------------|--------------|-------------|-------------|----------------|----------------|
| MXE EMI Receiver                 | Agilent      | N9038A      | MRTSUE06125 | 1 year         | 2019/08/18     |
| Loop Antenna                     | Schwarzbeck  | FMZB1519    | MRTSUE06025 | 1 year         | 2018/11/20     |
| Bilog Period Antenna             | Schwarzbeck  | VULB9162    | MRTSUE06022 | 1 year         | 2019/10/21     |
| Broad-Band Horn Antenna          | Schwarzbeck  | BBHA9120D   | MRTSUE06171 | 1 year         | 2018/11/18     |
| Broadband Coaxial Preamplifier   | Schwarzbeck  | BBV 9718    | MRTSUE06176 | 1 year         | 2018/11/17     |
| Broadband Horn Antenna           | Schwarzbeck  | BBHA9170    | MRTSUE06024 | 1 year         | 2018/12/14     |
| Digital Thermometer & Hygrometer | Minggao      | ETH529      | MRTSUE06170 | 1 year         | 2018/12/12     |
| Anechoic Chamber                 | RIKEN        | Chamber-AC1 | MRTSUE06213 | 1 year         | 2019/05/10     |

### Conducted Test Equipment - TR3

| Instrument        | Manufacturer | Type No. | Asset No.   | Cali. Interval | Cali. Due Date |
|-------------------|--------------|----------|-------------|----------------|----------------|
| Spectrum Analyzer | Agilent      | N9020A   | MRTSUE06106 | 1 year         | 2019/04/25     |
| Power Meter       | Agilent      | U2021XA  | MRTSUE06030 | 1 year         | 2018/12/06     |
| Thermohygrometer  | Testo        | 608-H1   | MRTSUE06401 | 1 year         | 2019/08/14     |

| Software | Version | Function          |
|----------|---------|-------------------|
| e3       | V8.3.5  | EMI Test Software |

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

|                                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------|
| <b>AC Conducted Emission Measurement – SR2</b>                                                                        |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>150kHz~30MHz: 3.46dB                        |
| <b>Radiated Emission Measurement - AC1</b>                                                                            |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>9kHz ~ 1GHz: 4.18dB<br>1GHz ~ 40GHz: 4.76dB |
| <b>Output Power - TR3</b>                                                                                             |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>1.13dB                                      |
| <b>Power Spectrum Density - TR3</b>                                                                                   |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>1.15dB                                      |
| <b>Occupied Bandwidth - TR3</b>                                                                                       |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>0.28%                                       |

## 7. TEST RESULT

### 7.1. Summary

**Product Name:** OmniAccess Stellar

**FCC ID:** 2AI9TOAW-AP1201

| FCC Section(s)                           | Test Description                                                              | Test Limit                                                                     | Test Condition | Test Result | Reference          |
|------------------------------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------|-------------|--------------------|
| 15.407(a)                                | 26dB Bandwidth                                                                | N/A                                                                            | Conducted      | Pass        | Section 7.2        |
| 15.407(e)                                | 6dB Bandwidth                                                                 | $\geq 500\text{kHz}$                                                           |                | Pass        | Section 7.3        |
| 15.407(a)(1)(ii), (2), (3)               | Maximum Conducted Output Power                                                | Refer to Section 7.5                                                           |                | Pass        | Section 7.5        |
| 15.407(h)(1)                             | Transmit Power Control                                                        | $\leq 24\text{ dBm}$                                                           |                | Pass        | Section 7.6        |
| 15.407(a)(1)(ii), (2), (3), (5)          | Peak Power Spectral Density                                                   | Refer to Section 7.7                                                           |                | Pass        | Section 7.7        |
| 15.407(g)                                | Frequency Stability                                                           | N/A                                                                            |                | Pass        | Section 7.8        |
| 15.407(b)(1), (2), (3), (4)              | Undesirable Emissions                                                         | Refer to Section 7.9 & 7.10                                                    | Radiated       | Pass        | Section 7.9 & 7.10 |
| 15.205, 15.209<br>15.407(b)(5), (6), (7) | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 |                | Pass        |                    |
| 15.207                                   | AC Conducted Emissions<br>150kHz - 30MHz                                      | < FCC 15.207 limits                                                            | Line Conducted | Pass        | Section 7.11       |

#### Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) Test Items "26dB Bandwidth", "99% Bandwidth", "6dB Bandwidth" have been assessed single and MIMO transmission, and showed the worst test data in this report.
- 4) We have evaluated 802.11a/n/ac mode and only show the test data of 802.11a/ac mode.

## 7.2. 26dB Bandwidth Measurement

### 7.2.1. Test Limit

N/A


### 7.2.2. Test Procedure used

KDB 789033 D02v02r01-Section C.1

### 7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 26$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3.  $VBW \geq 3 \times RBW$ .
4. Detector = Peak.
5. Trace mode = max hold.

### 7.2.4. Test Setup

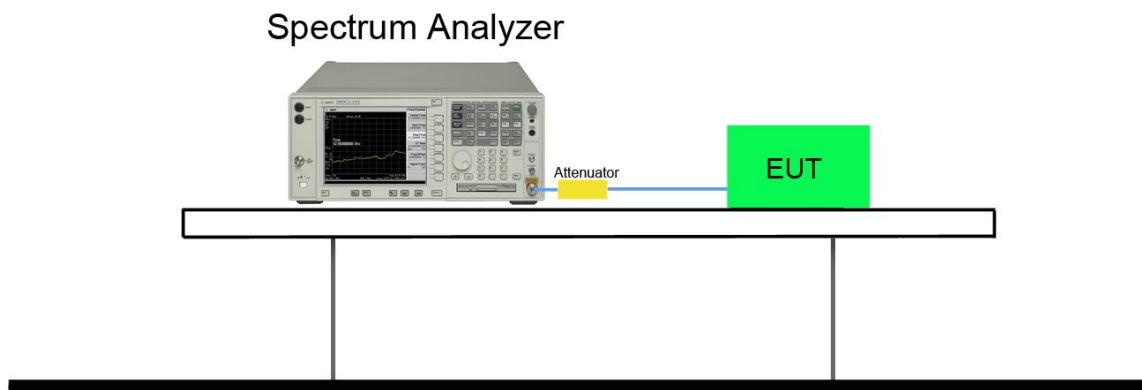


### 7.2.5.Test Result

|               |                    |                   |            |
|---------------|--------------------|-------------------|------------|
| Product       | OmniAccess Stellar | Temperature       | 24°C       |
| Test Engineer | Bruce Wang         | Relative Humidity | 59%        |
| Test Site     | TR3                | Test Date         | 2018/09/12 |


| Test Mode         | Data Rate/<br>MCS | Channel No. | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Bandwidth<br>(MHz) |
|-------------------|-------------------|-------------|--------------------|-------------------------|------------------------|
| Ant 0 / Ant 0 + 1 |                   |             |                    |                         |                        |
| 802.11a           | 6Mbps             | 52          | 5260               | 21.44                   | 16.60                  |
| 802.11a           | 6Mbps             | 60          | 5300               | 21.17                   | 16.57                  |
| 802.11a           | 6Mbps             | 64          | 5320               | 21.28                   | 16.60                  |
| 802.11a           | 6Mbps             | 100         | 5500               | 21.01                   | 16.69                  |
| 802.11a           | 6Mbps             | 120         | 5600               | 21.61                   | 16.76                  |
| 802.11a           | 6Mbps             | 140         | 5700               | 21.04                   | 16.65                  |
| 802.11a           | 6Mbps             | 144         | 5720               | 21.58                   | 16.74                  |
| 802.11ac-VHT20    | MCS0              | 52          | 5260               | 22.88                   | 17.82                  |
| 802.11ac-VHT20    | MCS0              | 60          | 5300               | 22.62                   | 17.77                  |
| 802.11ac-VHT20    | MCS0              | 64          | 5320               | 22.88                   | 17.80                  |
| 802.11ac-VHT20    | MCS0              | 100         | 5500               | 22.73                   | 17.95                  |
| 802.11ac-VHT20    | MCS0              | 120         | 5600               | 23.24                   | 18.06                  |
| 802.11ac-VHT20    | MCS0              | 140         | 5700               | 22.77                   | 17.92                  |
| 802.11ac-VHT20    | MCS0              | 144         | 5720               | 23.04                   | 18.06                  |
| 802.11ac-VHT40    | MCS0              | 54          | 5270               | 44.44                   | 36.69                  |
| 802.11ac-VHT40    | MCS0              | 62          | 5310               | 43.28                   | 36.48                  |
| 802.11ac-VHT40    | MCS0              | 102         | 5510               | 43.07                   | 36.31                  |
| 802.11ac-VHT40    | MCS0              | 118         | 5590               | 42.54                   | 36.20                  |
| 802.11ac-VHT40    | MCS0              | 134         | 5670               | 42.82                   | 36.33                  |
| 802.11ac-VHT40    | MCS0              | 142         | 5710               | 43.31                   | 36.40                  |
| 802.11ac-VHT80    | MCS0              | 58          | 5290               | 88.87                   | 76.49                  |
| 802.11ac-VHT80    | MCS0              | 106         | 5530               | 88.93                   | 76.23                  |
| 802.11ac-VHT80    | MCS0              | 122         | 5610               | 90.82                   | 76.32                  |
| 802.11ac-VHT80    | MCS0              | 138         | 5690               | 114.40                  | 77.11                  |

## 802.11a 26dB Bandwidth &amp; 99% Bandwidth - Ant 0 / Ant 0 + 1


## Channel 52 (5260MHz)

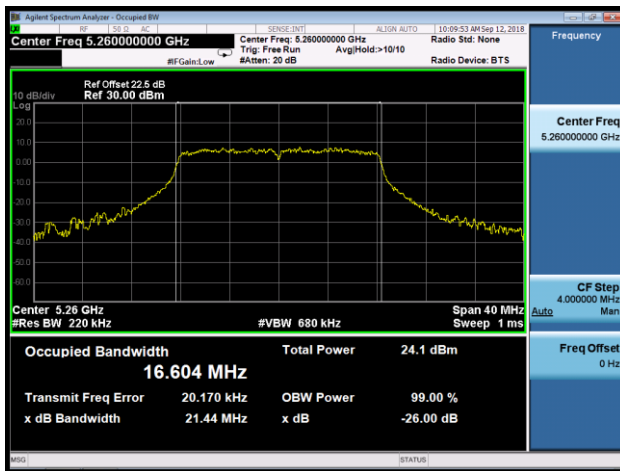


## Channel 60 (5300MHz)

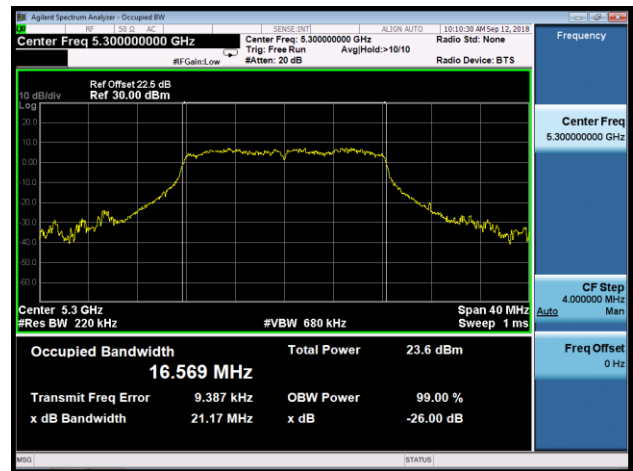


## Channel 64 (5320MHz)

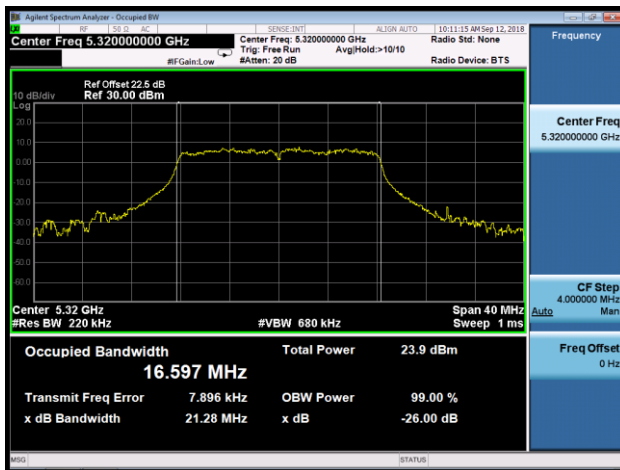


## Channel 100 (5500MHz)

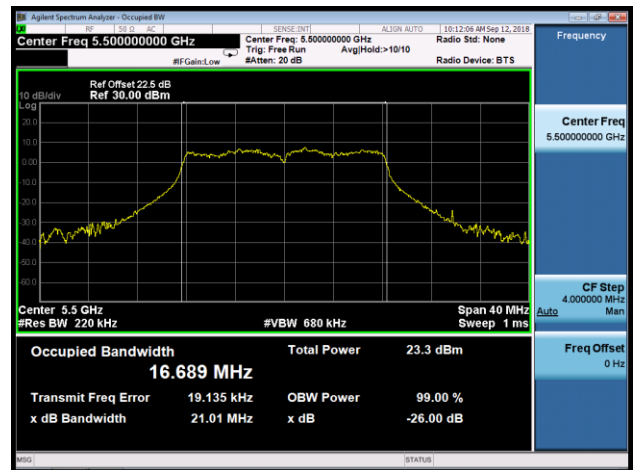


## Channel 120 (5600MHz)

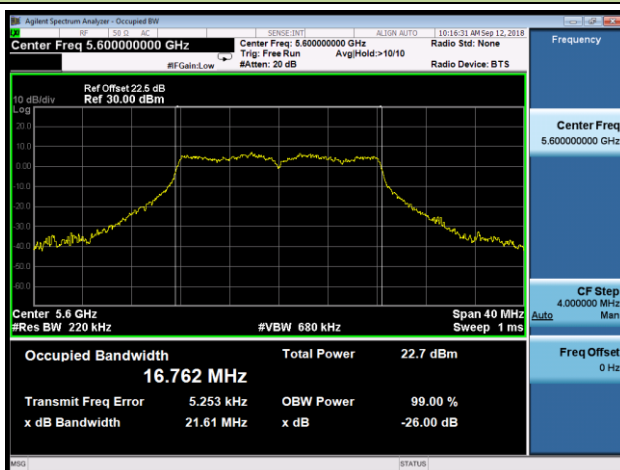

## Channel 140 (5700MHz)

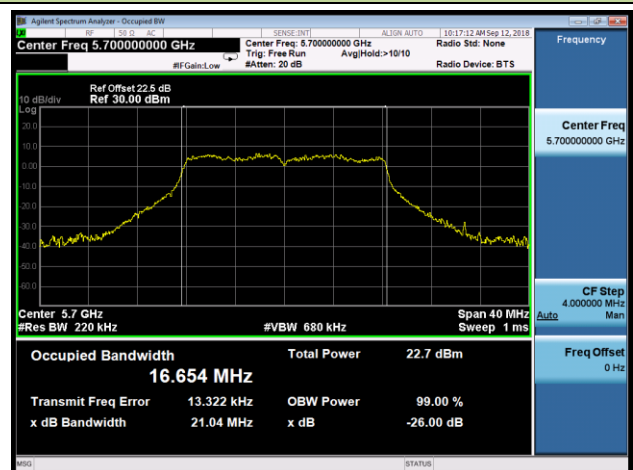


## Channel 144 (5720MHz)

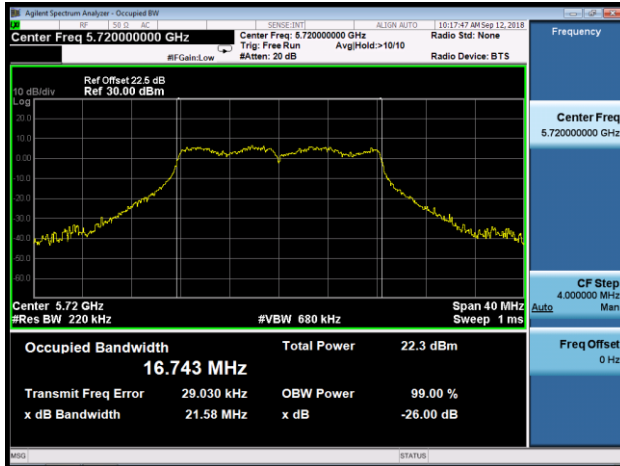


## 802.11ac-VHT20 26dB Bandwidth &amp; 99% Bandwidth - Ant 0 / Ant 0 + 1


## Channel 52 (5260MHz)

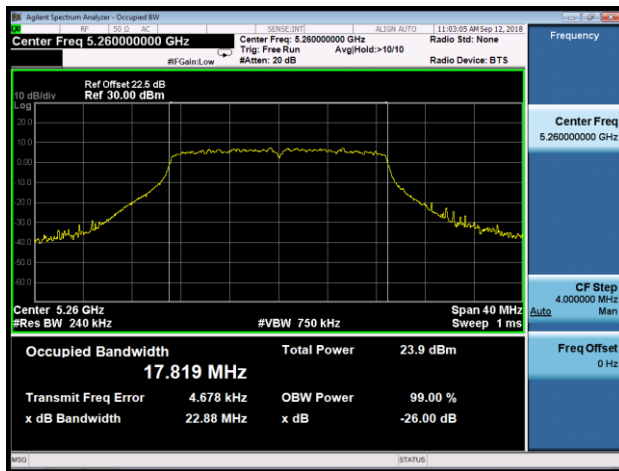


## Channel 60 (5300MHz)

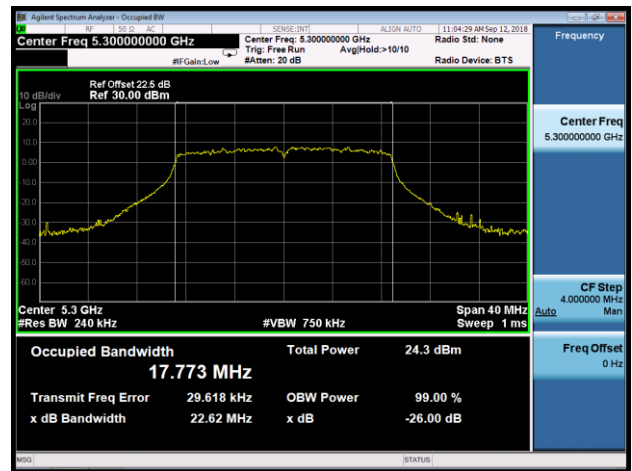


## Channel 64 (5320MHz)

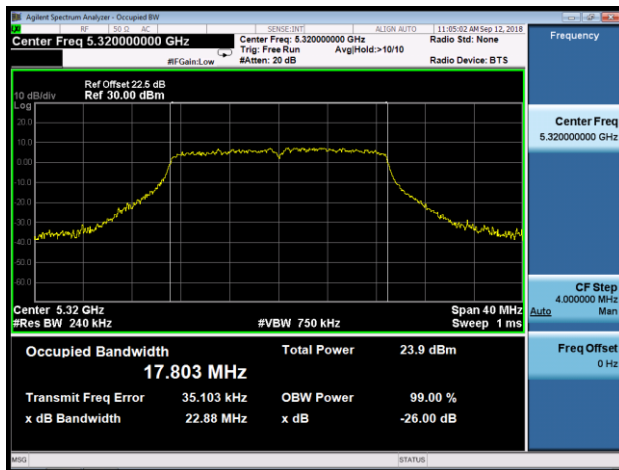


## Channel 100 (5500MHz)

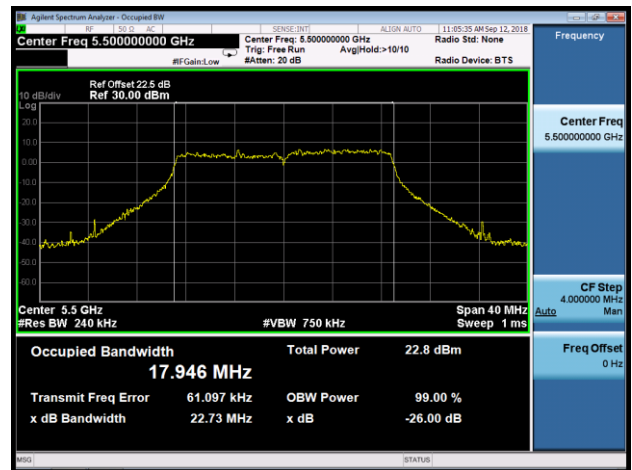


## Channel 120 (5600MHz)

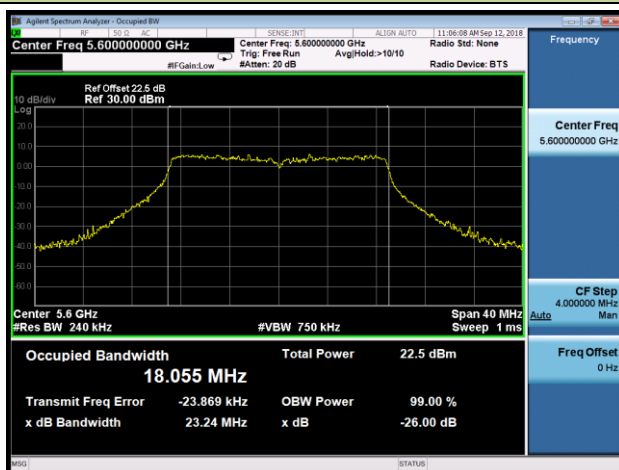


## Channel 140 (5700MHz)

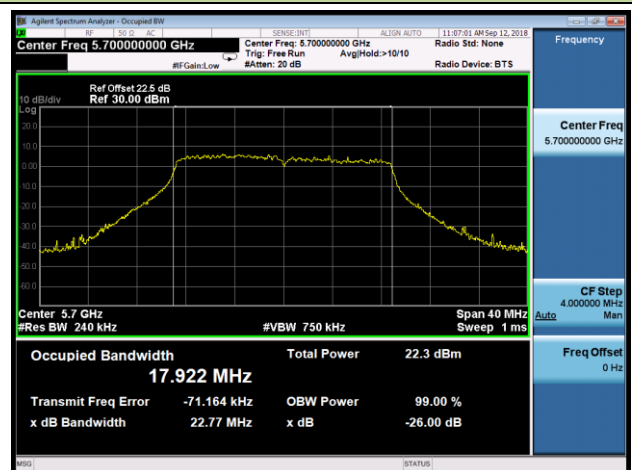

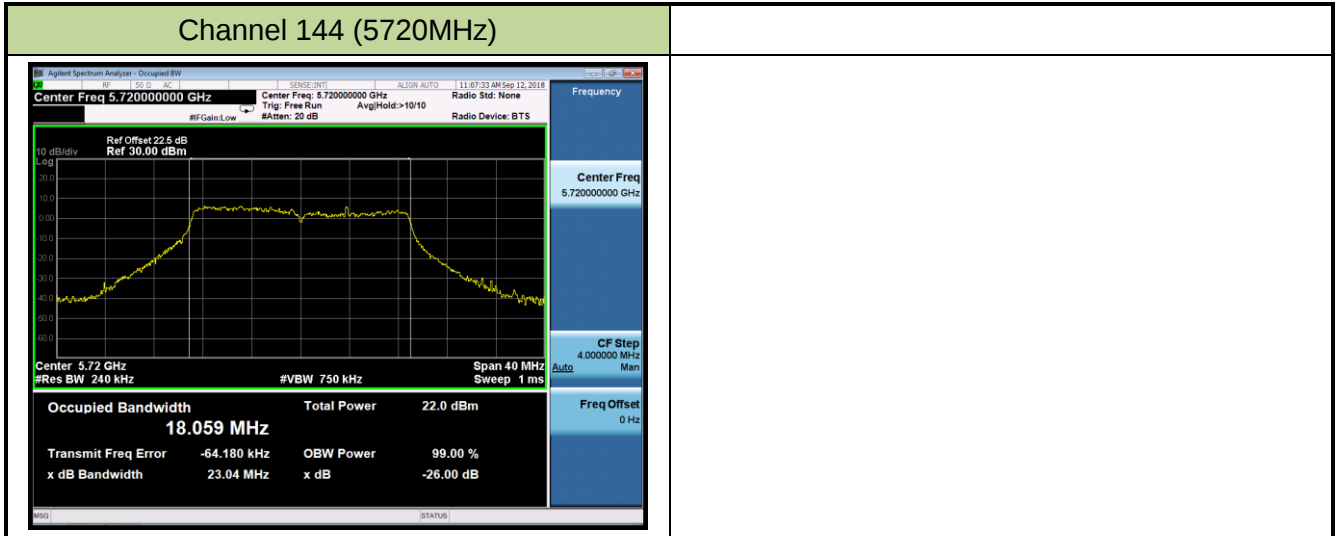


## 802.11ac-VHT40 26dB Bandwidth &amp; 99% Bandwidth - Ant 0 / Ant 0 + 1


## Channel 54 (5270MHz)

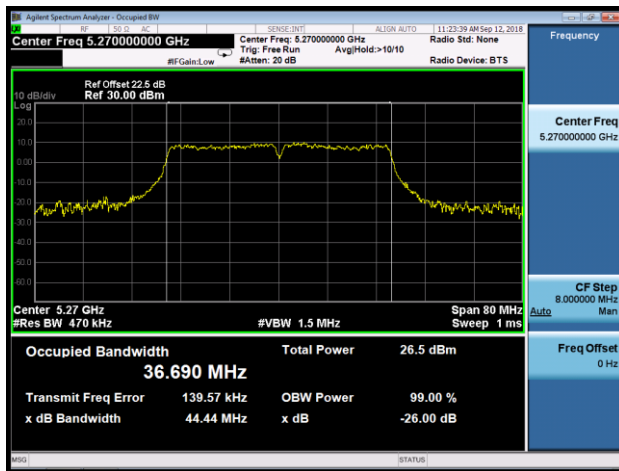


## Channel 62 (5310MHz)

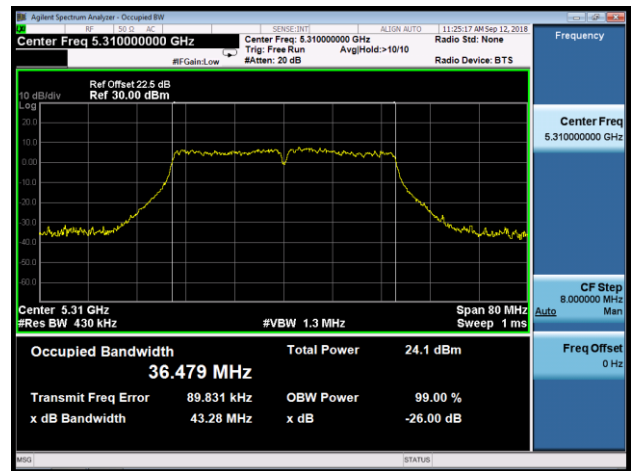


## Channel 102 (5510MHz)

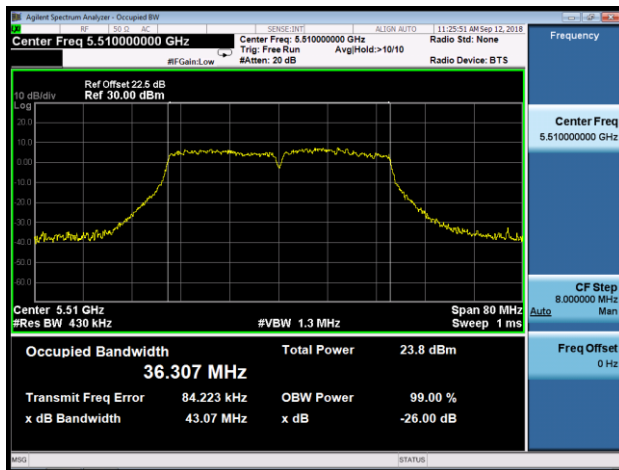


## Channel 118 (5590MHz)

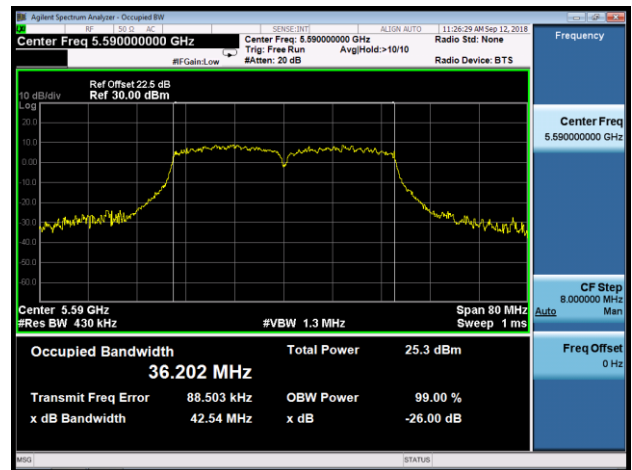

## Channel 134 (5670MHz)

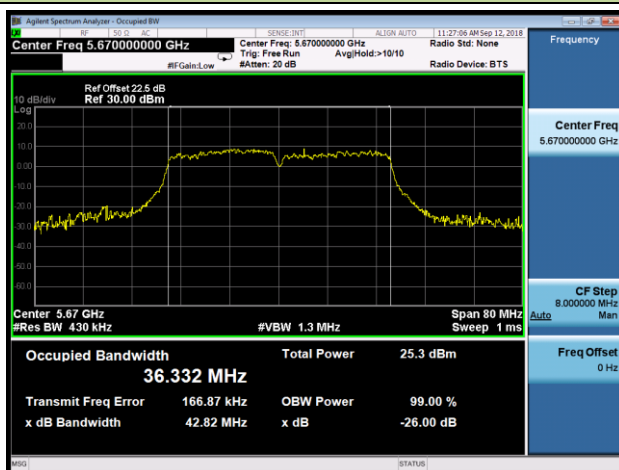


## Channel 142 (5710MHz)

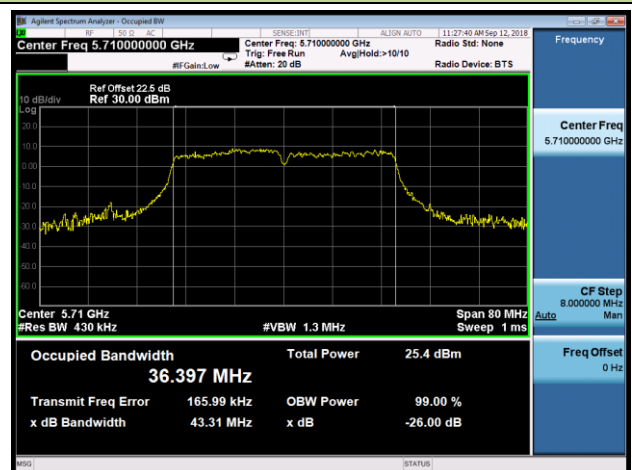


## 802.11ac-VHT80 26dB Bandwidth &amp; 99% Bandwidth - Ant 0 / Ant 0 + 1


## Channel 58 (5290MHz)

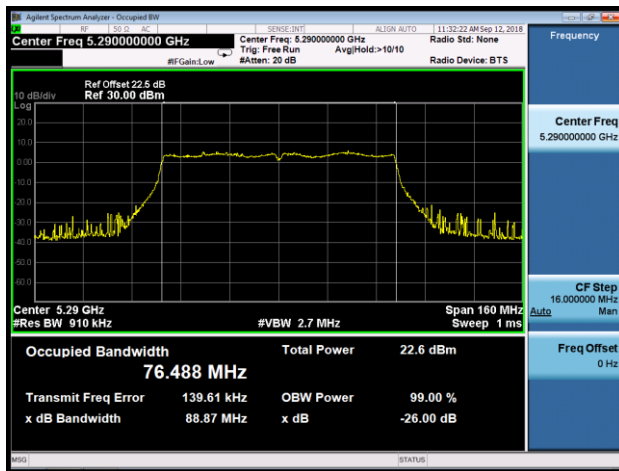


## Channel 106 (5530MHz)

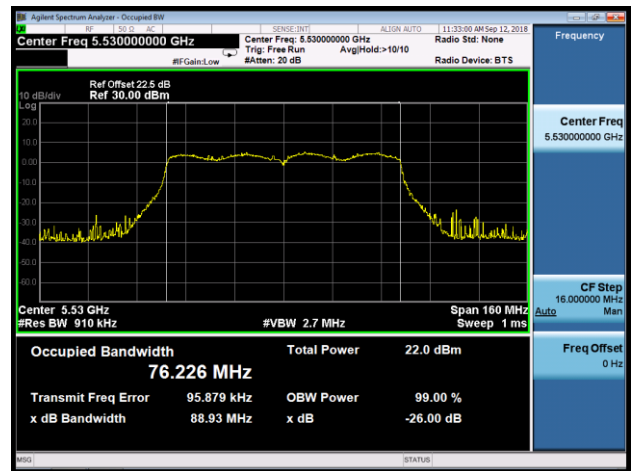

## Channel 122 (5610MHz)

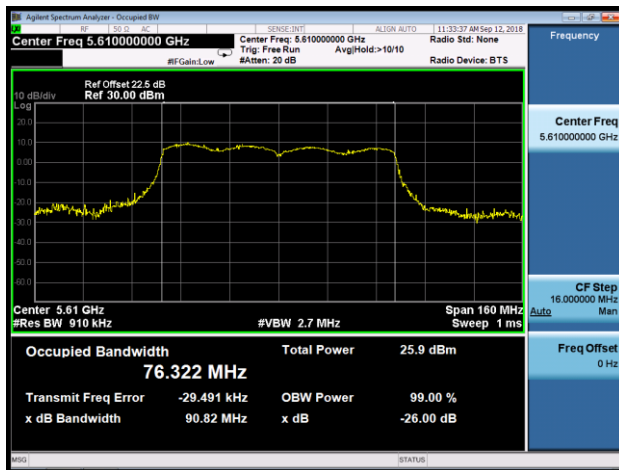

## Channel 138 (5690MHz)

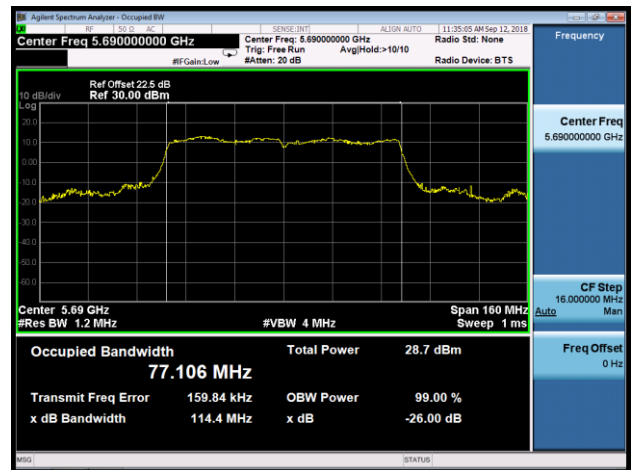

### 7.3. Output Power Measurement

#### 7.3.1. Test Limit

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (23.98dBm) or 11dBm +10 log (26dB BW).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


#### 7.3.2. Test Procedure Used

KDB 789033D02v01r04- Section E)3)b) Method PM-G

#### 7.3.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

#### 7.3.4. Test Setup

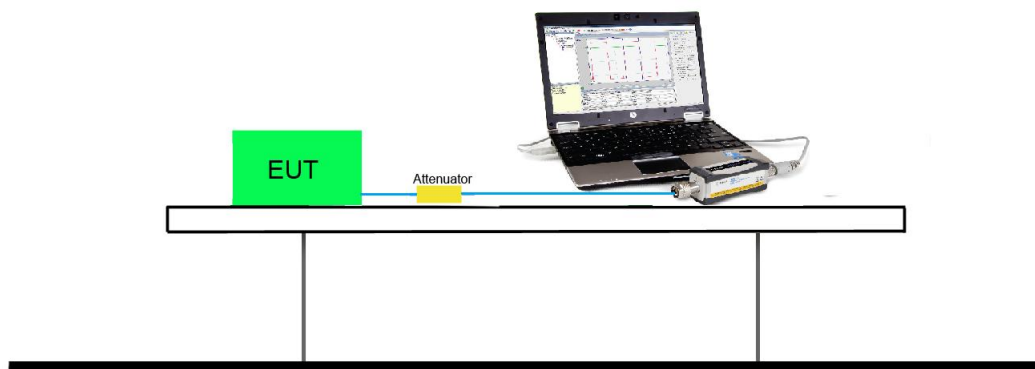

### 7.3.5.Test Result

Power output test was verified over all data rates of each mode shown as below table, and then choose the maximum power output (gray marker) for final test of each channel.

Output power at various data rates for Ant 0 / Ant 0 + 1 port:

| Test Mode | Bandwidth | Channel | Frequency (MHz) | Data Rate/ MCS | Average Power (dBm) |
|-----------|-----------|---------|-----------------|----------------|---------------------|
| 802.11a   | 20        | 52      | 5260            | 6Mbps          | 17.48               |
|           |           |         |                 | 24Mbps         | 17.09               |
|           |           |         |                 | 54Mbps         | 16.59               |
| 802.11ac  | 20        | 52      | 5260            | MCS0           | 17.24               |
|           |           |         |                 | MCS4           | 16.73               |
|           |           |         |                 | MCS8           | 16.15               |
| 802.11ac  | 40        | 54      | 5270            | MCS0           | 20.43               |
|           |           |         |                 | MCS4           | 19.80               |
|           |           |         |                 | MCS9           | 19.17               |
| 802.11ac  | 80        | 58      | 5290            | MCS0           | 14.74               |
|           |           |         |                 | MCS4           | 14.18               |
|           |           |         |                 | MCS9           | 13.63               |

|               |                    |                   |            |
|---------------|--------------------|-------------------|------------|
| Product       | OmniAccess Stellar | Temperature       | 24°C       |
| Test Engineer | Dandy Li           | Relative Humidity | 59%        |
| Test Site     | TR3                | Test Date         | 2018/09/09 |

| Test Mode            | Data Rate/<br>MCS | Channel<br>No. | Freq.<br>(MHz) | Ant 0<br>Average<br>Power (dBm) | Ant 1<br>Average<br>Power (dBm) | Total<br>Average<br>Power (dBm) | Average<br>Power<br>Limit (dBm) | Result |
|----------------------|-------------------|----------------|----------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|--------|
| Ant 0 + 1 (CDD Mode) |                   |                |                |                                 |                                 |                                 |                                 |        |
| 11a                  | 6Mbps             | 52             | 5260           | 17.48                           | 17.33                           | 20.42                           | ≤ 23.98                         | Pass   |
| 11a                  | 6Mbps             | 60             | 5300           | 17.35                           | 17.05                           | 20.21                           | ≤ 23.98                         | Pass   |
| 11a                  | 6Mbps             | 64             | 5320           | 17.38                           | 17.09                           | 20.25                           | ≤ 23.98                         | Pass   |
| 11a                  | 6Mbps             | 100            | 5500           | 16.58                           | 15.67                           | 19.16                           | ≤ 23.98                         | Pass   |
| 11a                  | 6Mbps             | 120            | 5600           | 16.14                           | 15.33                           | 18.76                           | ≤ 23.98                         | Pass   |
| 11a                  | 6Mbps             | 140            | 5700           | 16.62                           | 15.84                           | 19.26                           | ≤ 23.98                         | Pass   |
| 11a                  | 6Mbps             | 144            | 5720           | 16.46                           | 15.90                           | 19.20                           | ≤ 23.98                         | Pass   |
| 11ac-VHT20           | MCS0              | 52             | 5260           | 17.24                           | 16.85                           | 20.06                           | ≤ 23.98                         | Pass   |
| 11ac-VHT20           | MCS0              | 60             | 5300           | 17.71                           | 17.01                           | 20.38                           | ≤ 23.98                         | Pass   |
| 11ac-VHT20           | MCS0              | 64             | 5320           | 17.72                           | 16.97                           | 20.37                           | ≤ 23.98                         | Pass   |
| 11ac-VHT20           | MCS0              | 100            | 5500           | 16.35                           | 15.64                           | 19.02                           | ≤ 23.98                         | Pass   |
| 11ac-VHT20           | MCS0              | 120            | 5600           | 15.81                           | 15.46                           | 18.65                           | ≤ 23.98                         | Pass   |
| 11ac-VHT20           | MCS0              | 140            | 5700           | 16.21                           | 15.72                           | 18.98                           | ≤ 23.98                         | Pass   |
| 11ac-VHT20           | MCS0              | 144            | 5720           | 16.16                           | 16.12                           | 19.15                           | ≤ 23.98                         | Pass   |
| 11ac-VHT40           | MCS0              | 54             | 5270           | 20.43                           | 20.14                           | 23.30                           | ≤ 23.98                         | Pass   |
| 11ac-VHT40           | MCS0              | 62             | 5310           | 17.07                           | 15.96                           | 19.56                           | ≤ 23.98                         | Pass   |
| 11ac-VHT40           | MCS0              | 102            | 5510           | 16.25                           | 15.57                           | 18.93                           | ≤ 23.98                         | Pass   |
| 11ac-VHT40           | MCS0              | 118            | 5590           | 19.02                           | 18.50                           | 21.78                           | ≤ 23.98                         | Pass   |
| 11ac-VHT40           | MCS0              | 134            | 5670           | 18.35                           | 17.97                           | 21.17                           | ≤ 23.98                         | Pass   |
| 11ac-VHT40           | MCS0              | 142            | 5710           | 19.67                           | 19.07                           | 22.39                           | ≤ 23.98                         | Pass   |
| 11ac-VHT80           | MCS0              | 58             | 5290           | 14.74                           | 14.05                           | 17.42                           | ≤ 23.98                         | Pass   |
| 11ac-VHT80           | MCS0              | 106            | 5530           | 13.45                           | 12.97                           | 16.23                           | ≤ 23.98                         | Pass   |
| 11ac-VHT80           | MCS0              | 122            | 5610           | 17.83                           | 17.40                           | 20.63                           | ≤ 23.98                         | Pass   |
| 11ac-VHT80           | MCS0              | 138            | 5690           | 19.28                           | 18.34                           | 21.85                           | ≤ 23.98                         | Pass   |

Note 1: Total Average Power (dBm) =  $10 \cdot \log\{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$ .

| Test Mode                     | Data Rate/<br>MCS | Channel<br>No. | Freq.<br>(MHz) | Ant 0<br>Average<br>Power (dBm) | Ant 1<br>Average<br>Power (dBm) | Total<br>Average<br>Power (dBm) | Average<br>Power<br>Limit (dBm) | Result |
|-------------------------------|-------------------|----------------|----------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|--------|
| Ant 0 + 1 (Beam-Forming Mode) |                   |                |                |                                 |                                 |                                 |                                 |        |
| 11ac-VHT20                    | MCS0              | 52             | 5260           | 17.24                           | 16.85                           | 20.06                           | ≤ 23.56                         | Pass   |
| 11ac-VHT20                    | MCS0              | 60             | 5300           | 17.71                           | 17.01                           | 20.38                           | ≤ 23.56                         | Pass   |
| 11ac-VHT20                    | MCS0              | 64             | 5320           | 17.72                           | 16.97                           | 20.37                           | ≤ 23.56                         | Pass   |
| 11ac-VHT20                    | MCS0              | 100            | 5500           | 16.35                           | 15.64                           | 19.02                           | ≤ 22.76                         | Pass   |
| 11ac-VHT20                    | MCS0              | 120            | 5600           | 15.81                           | 15.46                           | 18.65                           | ≤ 22.76                         | Pass   |
| 11ac-VHT20                    | MCS0              | 140            | 5700           | 16.21                           | 15.72                           | 18.98                           | ≤ 22.76                         | Pass   |
| 11ac-VHT20                    | MCS0              | 144            | 5720           | 16.16                           | 16.12                           | 19.15                           | ≤ 22.76                         | Pass   |
| 11ac-VHT40                    | MCS0              | 54             | 5270           | 20.43                           | 20.14                           | 23.30                           | ≤ 23.56                         | Pass   |
| 11ac-VHT40                    | MCS0              | 62             | 5310           | 17.07                           | 15.96                           | 19.56                           | ≤ 23.56                         | Pass   |
| 11ac-VHT40                    | MCS0              | 102            | 5510           | 16.25                           | 15.57                           | 18.93                           | ≤ 22.76                         | Pass   |
| 11ac-VHT40                    | MCS0              | 118            | 5590           | 19.02                           | 18.50                           | 21.78                           | ≤ 22.76                         | Pass   |
| 11ac-VHT40                    | MCS0              | 134            | 5670           | 18.35                           | 17.97                           | 21.17                           | ≤ 22.76                         | Pass   |
| 11ac-VHT40                    | MCS0              | 142            | 5710           | 19.67                           | 19.07                           | 22.39                           | ≤ 22.76                         | Pass   |
| 11ac-VHT80                    | MCS0              | 58             | 5290           | 14.74                           | 14.05                           | 17.42                           | ≤ 23.56                         | Pass   |
| 11ac-VHT80                    | MCS0              | 106            | 5530           | 13.45                           | 12.97                           | 16.23                           | ≤ 22.76                         | Pass   |
| 11ac-VHT80                    | MCS0              | 122            | 5610           | 17.83                           | 17.40                           | 20.63                           | ≤ 22.76                         | Pass   |
| 11ac-VHT80                    | MCS0              | 138            | 5690           | 19.28                           | 18.34                           | 21.85                           | ≤ 22.76                         | Pass   |

Note 1: Total Average Power (dBm) =  $10 \cdot \log\{10^{(\text{Ant 0 Average Power}/10)} + 10^{(\text{Ant 1 Average Power}/10)}\}$ .

Note 2: For 5250 ~ 5350MHz Band, Average Power Limit (dBm) = 23.98dBm - (6.42dBi - 6dBi) = 23.56dBm.

For 5470 ~ 5725MHz Band, Average Power Limit (dBm) = 23.98dBm - (7.22dBi - 6dBi) = 22.76dBm.

## 7.4. Transmit Power Control

### 7.4.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30dBm.


### 7.4.2. Test Procedure Used

KDB 789033 D02v01- Section E)3)b) Method PM-G

### 7.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### 7.4.4. Test Setup

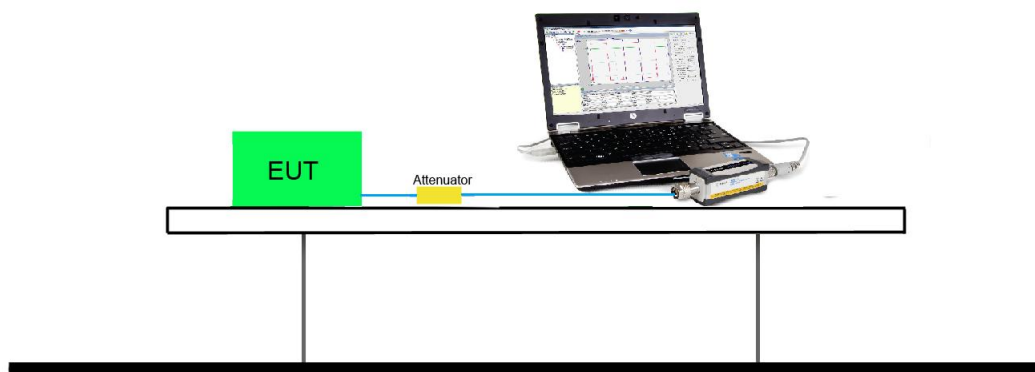

#### 7.4.5. Test Result

|               |                        |                   |            |
|---------------|------------------------|-------------------|------------|
| Product       | OmniAccess Stellar     | Temperature       | 24°C       |
| Test Engineer | Cloud Guo              | Relative Humidity | 59%        |
| Test Site     | TR3                    | Test Date         | 2018/09/14 |
| Test Item     | Transmit Power Control |                   |            |

| Test Mode            | Data Rate /MCS | Channel No. | Freq. (MHz) | Ant 0 TPC Power (dBm) | Ant 1 TPC Power (dBm) | Total EIRP TPC Power (dBm) | Limit (dBm) | Result |
|----------------------|----------------|-------------|-------------|-----------------------|-----------------------|----------------------------|-------------|--------|
| Ant 0 + 1 (CDD Mode) |                |             |             |                       |                       |                            |             |        |
| 11a                  | 6Mbps          | 52          | 5260        | 16.91                 | 16.84                 | 23.69                      | ≤ 24.00     | Pass   |
| 11a                  | 6Mbps          | 60          | 5300        | 16.78                 | 16.61                 | 23.51                      | ≤ 24.00     | Pass   |
| 11a                  | 6Mbps          | 64          | 5320        | 16.89                 | 16.58                 | 23.55                      | ≤ 24.00     | Pass   |
| 11a                  | 6Mbps          | 100         | 5500        | 16.60                 | 15.81                 | 23.83                      | ≤ 24.00     | Pass   |
| 11a                  | 6Mbps          | 120         | 5600        | 16.25                 | 15.37                 | 23.44                      | ≤ 24.00     | Pass   |
| 11a                  | 6Mbps          | 140         | 5700        | 16.59                 | 15.78                 | 23.81                      | ≤ 24.00     | Pass   |
| 11a                  | 6Mbps          | 144         | 5720        | 16.53                 | 15.93                 | 23.85                      | ≤ 24.00     | Pass   |
| 11ac-VHT20           | MCS0           | 52          | 5260        | 17.11                 | 16.76                 | 23.75                      | ≤ 24.00     | Pass   |
| 11ac-VHT20           | MCS0           | 60          | 5300        | 17.27                 | 16.70                 | 23.80                      | ≤ 24.00     | Pass   |
| 11ac-VHT20           | MCS0           | 64          | 5320        | 17.27                 | 16.62                 | 23.77                      | ≤ 24.00     | Pass   |
| 11ac-VHT20           | MCS0           | 100         | 5500        | 16.42                 | 15.59                 | 23.64                      | ≤ 24.00     | Pass   |
| 11ac-VHT20           | MCS0           | 120         | 5600        | 15.89                 | 15.63                 | 23.37                      | ≤ 24.00     | Pass   |
| 11ac-VHT20           | MCS0           | 140         | 5700        | 16.29                 | 15.83                 | 23.68                      | ≤ 24.00     | Pass   |
| 11ac-VHT20           | MCS0           | 144         | 5720        | 16.21                 | 16.03                 | 23.73                      | ≤ 24.00     | Pass   |
| 11ac-VHT40           | MCS0           | 54          | 5270        | 17.00                 | 16.78                 | 23.70                      | ≤ 24.00     | Pass   |
| 11ac-VHT40           | MCS0           | 62          | 5310        | 17.04                 | 16.31                 | 23.50                      | ≤ 24.00     | Pass   |
| 11ac-VHT40           | MCS0           | 102         | 5510        | 16.38                 | 15.62                 | 23.63                      | ≤ 24.00     | Pass   |
| 11ac-VHT40           | MCS0           | 118         | 5590        | 16.39                 | 15.89                 | 23.76                      | ≤ 24.00     | Pass   |
| 11ac-VHT40           | MCS0           | 134         | 5670        | 16.18                 | 15.87                 | 23.64                      | ≤ 24.00     | Pass   |
| 11ac-VHT40           | MCS0           | 142         | 5710        | 16.26                 | 15.89                 | 23.69                      | ≤ 24.00     | Pass   |
| 11ac-VHT80           | MCS0           | 58          | 5290        | 16.89                 | 16.37                 | 23.45                      | ≤ 24.00     | Pass   |
| 11ac-VHT80           | MCS0           | 106         | 5530        | 16.22                 | 15.67                 | 23.56                      | ≤ 24.00     | Pass   |
| 11ac-VHT80           | MCS0           | 122         | 5610        | 16.37                 | 16.04                 | 23.82                      | ≤ 24.00     | Pass   |
| 11ac-VHT80           | MCS0           | 138         | 5690        | 16.63                 | 15.77                 | 23.83                      | ≤ 24.00     | Pass   |

Note: Total EIRP TPC Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 0 TPC Power} / 10)} + 10^{(\text{Ant 1 TPC Power} / 10)}\} + \text{CDD Ant Gain (dBi)}$ .

| Test Mode                     | Data Rate /MCS | Channel No. | Freq. (MHz) | Ant 0 TPC Power (dBm) | Ant 1 TPC Power (dBm) | Total EIRP TPC Power (dBm) | Limit (dBm) | Result |
|-------------------------------|----------------|-------------|-------------|-----------------------|-----------------------|----------------------------|-------------|--------|
| Ant 0 + 1 (Beam-Forming Mode) |                |             |             |                       |                       |                            |             |        |
| 11ac-VHT20                    | MCS0           | 52          | 5260        | 14.56                 | 14.03                 | 23.73                      | ≤ 24.00     | Pass   |
| 11ac-VHT20                    | MCS0           | 60          | 5300        | 14.63                 | 13.95                 | 23.73                      | ≤ 24.00     | Pass   |
| 11ac-VHT20                    | MCS0           | 64          | 5320        | 14.58                 | 13.89                 | 23.68                      | ≤ 24.00     | Pass   |
| 11ac-VHT20                    | MCS0           | 100         | 5500        | 13.89                 | 13.16                 | 23.77                      | ≤ 24.00     | Pass   |
| 11ac-VHT20                    | MCS0           | 120         | 5600        | 13.46                 | 13.38                 | 23.65                      | ≤ 24.00     | Pass   |
| 11ac-VHT20                    | MCS0           | 140         | 5700        | 13.67                 | 13.22                 | 23.68                      | ≤ 24.00     | Pass   |
| 11ac-VHT20                    | MCS0           | 144         | 5720        | 13.78                 | 13.18                 | 23.72                      | ≤ 24.00     | Pass   |
| 11ac-VHT40                    | MCS0           | 54          | 5270        | 14.62                 | 14.03                 | 23.77                      | ≤ 24.00     | Pass   |
| 11ac-VHT40                    | MCS0           | 62          | 5310        | 14.78                 | 13.89                 | 23.79                      | ≤ 24.00     | Pass   |
| 11ac-VHT40                    | MCS0           | 102         | 5510        | 13.89                 | 13.41                 | 23.89                      | ≤ 24.00     | Pass   |
| 11ac-VHT40                    | MCS0           | 118         | 5590        | 13.92                 | 13.28                 | 23.84                      | ≤ 24.00     | Pass   |
| 11ac-VHT40                    | MCS0           | 134         | 5670        | 13.67                 | 13.44                 | 23.79                      | ≤ 24.00     | Pass   |
| 11ac-VHT40                    | MCS0           | 142         | 5710        | 13.69                 | 13.14                 | 23.65                      | ≤ 24.00     | Pass   |
| 11ac-VHT80                    | MCS0           | 58          | 5290        | 14.71                 | 14.06                 | 23.83                      | ≤ 24.00     | Pass   |
| 11ac-VHT80                    | MCS0           | 106         | 5530        | 13.52                 | 13.03                 | 23.51                      | ≤ 24.00     | Pass   |
| 11ac-VHT80                    | MCS0           | 122         | 5610        | 13.69                 | 13.20                 | 23.68                      | ≤ 24.00     | Pass   |
| 11ac-VHT80                    | MCS0           | 138         | 5690        | 13.67                 | 13.15                 | 23.65                      | ≤ 24.00     | Pass   |

Note: Total EIRP TPC Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 0 TPC Power} / 10)} + 10^{(\text{Ant 1 TPC Power} / 10)}\} + \text{Beam-Forming Gain (dBi)}$ .

## **7.5. Power Spectral Density Measurement**

### **7.5.1. Test Limit**

For the band 5.25-5.35 GHz and 5.47-5.725 GHz, the power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### **7.5.2. Test Procedure Used**

KDB 789033 D02v02r01 - Section F

### **7.5.3. Test Setting**

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,  
RBW = 100 kHz
4. VBW = 3MHz
5. Number of sweep points  $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add  $10 \cdot \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add  $10 \cdot \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
11. When the measurement bandwidth of Maximum PSD is specified in 500 kHz, add a constant factor  $10 \cdot \log(500\text{kHz}/100\text{kHz}) = 6.99$  dB to the measured result.

#### 7.5.4. Test Setup

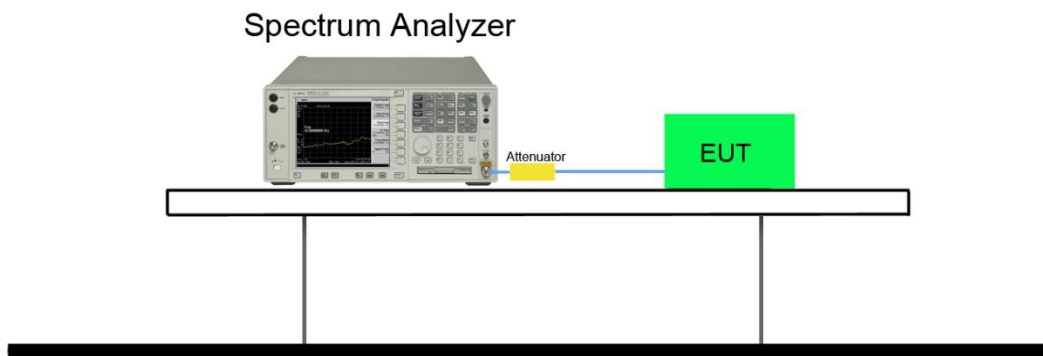

### 7.5.5.Test Result

|               |                                             |                   |            |
|---------------|---------------------------------------------|-------------------|------------|
| Product       | OmniAccess Stellar                          | Temperature       | 22°C       |
| Test Engineer | Lewis Huang                                 | Relative Humidity | 54%        |
| Test Site     | TR3                                         | Test Date         | 2018/09/12 |
| Test Item     | Power Spectral Density ( Band 2a & Band 2c) |                   |            |

| Test Mode  | Data Rate<br>/ MCS | Channel<br>No. | Freq.<br>(MHz) | Ant 0 PSD<br>(dBm/ MHz) | Ant 1 PSD<br>(dBm/ MHz) | Duty<br>Cycle (%) | Total PSD<br>(dBm/ MHz) | PSD Limit<br>(dBm/MHz) | Result |
|------------|--------------------|----------------|----------------|-------------------------|-------------------------|-------------------|-------------------------|------------------------|--------|
| 11a        | 6Mbps              | 52             | 5260           | 6.75                    | 6.66                    | 95.73             | 9.91                    | ≤ 10.19                | Pass   |
| 11a        | 6Mbps              | 60             | 5300           | 6.88                    | 6.55                    | 95.73             | 9.92                    | ≤ 10.19                | Pass   |
| 11a        | 6Mbps              | 64             | 5320           | 6.84                    | 6.31                    | 95.73             | 9.78                    | ≤ 10.19                | Pass   |
| 11a        | 6Mbps              | 100            | 5500           | 6.28                    | 5.56                    | 95.73             | 9.13                    | ≤ 9.39                 | Pass   |
| 11a        | 6Mbps              | 120            | 5600           | 6.07                    | 5.60                    | 95.73             | 9.04                    | ≤ 9.39                 | Pass   |
| 11a        | 6Mbps              | 140            | 5700           | 5.97                    | 5.71                    | 95.73             | 9.04                    | ≤ 9.39                 | Pass   |
| 11a        | 6Mbps              | 144            | 5720           | 6.12                    | 5.41                    | 95.73             | 8.98                    | ≤ 9.39                 | Pass   |
| 11ac-VHT20 | MCS0               | 52             | 5260           | 6.49                    | 5.98                    | 97.84             | 9.35                    | ≤ 10.19                | Pass   |
| 11ac-VHT20 | MCS0               | 60             | 5300           | 6.83                    | 6.10                    | 97.84             | 9.59                    | ≤ 10.19                | Pass   |
| 11ac-VHT20 | MCS0               | 64             | 5320           | 6.91                    | 5.86                    | 97.84             | 9.52                    | ≤ 10.19                | Pass   |
| 11ac-VHT20 | MCS0               | 100            | 5500           | 6.08                    | 5.33                    | 97.84             | 8.83                    | ≤ 9.39                 | Pass   |
| 11ac-VHT20 | MCS0               | 120            | 5600           | 5.50                    | 5.69                    | 97.84             | 8.70                    | ≤ 9.39                 | Pass   |
| 11ac-VHT20 | MCS0               | 140            | 5700           | 5.64                    | 5.55                    | 97.84             | 8.70                    | ≤ 9.39                 | Pass   |
| 11ac-VHT20 | MCS0               | 144            | 5720           | 5.65                    | 5.56                    | 97.84             | 8.71                    | ≤ 9.39                 | Pass   |
| 11ac-VHT40 | MCS0               | 54             | 5270           | 6.86                    | 6.04                    | 95.45             | 9.68                    | ≤ 10.19                | Pass   |
| 11ac-VHT40 | MCS0               | 62             | 5310           | 3.82                    | 2.96                    | 95.45             | 6.62                    | ≤ 10.19                | Pass   |
| 11ac-VHT40 | MCS0               | 102            | 5510           | 3.73                    | 2.93                    | 95.45             | 6.56                    | ≤ 9.39                 | Pass   |
| 11ac-VHT40 | MCS0               | 118            | 5590           | 6.41                    | 5.15                    | 95.45             | 9.04                    | ≤ 9.39                 | Pass   |
| 11ac-VHT40 | MCS0               | 134            | 5670           | 5.42                    | 4.81                    | 95.45             | 8.34                    | ≤ 9.39                 | Pass   |
| 11ac-VHT40 | MCS0               | 142            | 5710           | 6.15                    | 5.58                    | 95.45             | 9.09                    | ≤ 9.39                 | Pass   |
| 11ac-VHT80 | MCS0               | 58             | 5290           | -2.11                   | -1.81                   | 91.99             | 1.42                    | ≤ 10.19                | Pass   |
| 11ac-VHT80 | MCS0               | 106            | 5530           | -2.44                   | -2.55                   | 91.99             | 0.88                    | ≤ 9.39                 | Pass   |
| 11ac-VHT80 | MCS0               | 122            | 5610           | 1.97                    | 1.35                    | 91.99             | 5.04                    | ≤ 9.39                 | Pass   |
| 11ac-VHT80 | MCS0               | 138            | 5690           | 3.65                    | 2.80                    | 91.99             | 6.62                    | ≤ 9.39                 | Pass   |

Note 1: When EUT duty cycle ≥ 98%, the total PSD =  $10 \cdot \log\{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$

Note 2: When EUT duty cycle < 98%, the total PSD =  $10 \cdot \log\{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\} + 10 \cdot \log(1/\text{duty cycle})$

Note 3: For 5250 - 5350MHz Band: PSD Limit (dBm/MHz) = 11dBm/MHz - (6.81dBi - 6.00dBi) = 10.19dBm/MHz.

For 5470 - 5725MHz Band: PSD Limit (dBm/MHz) = 11dBm/MHz - (7.61dBi - 6.00dBi) = 9.39dBm/MHz.

|               |                                             |                   |            |
|---------------|---------------------------------------------|-------------------|------------|
| Product       | OmniAccess Stellar                          | Temperature       | 22°C       |
| Test Engineer | Lewis Huang                                 | Relative Humidity | 54%        |
| Test Site     | TR3                                         | Test Date         | 2018/09/17 |
| Test Item     | Power Spectral Density ( Band 2a & Band 2c) |                   |            |

| Test Mode                     | Data Rate<br>/ MCS | Channel<br>No. | Freq.<br>(MHz) | Ant 0 PSD<br>(dBm/ MHz) | Ant 1 PSD<br>(dBm/ MHz) | Duty<br>Cycle (%) | Total PSD<br>(dBm/ MHz) | PSD Limit<br>(dBm/MHz) | Result |
|-------------------------------|--------------------|----------------|----------------|-------------------------|-------------------------|-------------------|-------------------------|------------------------|--------|
| Ant 0 + 1 (Beam-Forming Mode) |                    |                |                |                         |                         |                   |                         |                        |        |
| 11ac-VHT20                    | MCS0               | 52             | 5260           | 7.63                    | 6.99                    | 97.84             | 10.43                   | ≤ 10.58                | Pass   |
| 11ac-VHT20                    | MCS0               | 60             | 5300           | 7.59                    | 6.62                    | 97.84             | 10.24                   | ≤ 10.58                | Pass   |
| 11ac-VHT20                    | MCS0               | 64             | 5320           | 7.66                    | 6.50                    | 97.84             | 10.22                   | ≤ 10.58                | Pass   |
| 11ac-VHT20                    | MCS0               | 100            | 5500           | 7.19                    | 5.91                    | 97.84             | 9.70                    | ≤ 9.78                 | Pass   |
| 11ac-VHT20                    | MCS0               | 120            | 5600           | 6.61                    | 6.01                    | 97.84             | 9.43                    | ≤ 9.78                 | Pass   |
| 11ac-VHT20                    | MCS0               | 140            | 5700           | 6.37                    | 6.10                    | 97.84             | 9.34                    | ≤ 9.78                 | Pass   |
| 11ac-VHT20                    | MCS0               | 144            | 5720           | 6.56                    | 6.44                    | 97.84             | 9.61                    | ≤ 9.78                 | Pass   |
| 11ac-VHT40                    | MCS0               | 54             | 5270           | 7.13                    | 6.48                    | 95.45             | 10.03                   | ≤ 10.58                | Pass   |
| 11ac-VHT40                    | MCS0               | 62             | 5310           | 7.01                    | 6.40                    | 95.45             | 9.93                    | ≤ 10.58                | Pass   |
| 11ac-VHT40                    | MCS0               | 102            | 5510           | 6.63                    | 6.00                    | 95.45             | 9.54                    | ≤ 9.78                 | Pass   |
| 11ac-VHT40                    | MCS0               | 118            | 5590           | 6.36                    | 5.82                    | 95.45             | 9.31                    | ≤ 9.78                 | Pass   |
| 11ac-VHT40                    | MCS0               | 134            | 5670           | 6.68                    | 5.94                    | 95.45             | 9.54                    | ≤ 9.78                 | Pass   |
| 11ac-VHT40                    | MCS0               | 142            | 5710           | 6.36                    | 5.49                    | 95.45             | 9.16                    | ≤ 9.78                 | Pass   |
| 11ac-VHT80                    | MCS0               | 58             | 5290           | 1.26                    | 0.62                    | 91.99             | 4.33                    | ≤ 10.58                | Pass   |
| 11ac-VHT80                    | MCS0               | 106            | 5530           | 1.70                    | 1.02                    | 91.99             | 4.75                    | ≤ 9.78                 | Pass   |
| 11ac-VHT80                    | MCS0               | 122            | 5610           | 4.99                    | 4.18                    | 91.99             | 7.98                    | ≤ 9.78                 | Pass   |
| 11ac-VHT80                    | MCS0               | 138            | 5690           | 3.73                    | 3.45                    | 91.99             | 6.97                    | ≤ 9.78                 | Pass   |

Note 1: When EUT duty cycle ≥ 98%, the total PSD =  $10 \cdot \log\{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$


Note 2: When EUT duty cycle < 98%, the total PSD =  $10 \cdot \log\{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\} + 10 \cdot \log(1/\text{duty cycle})$

Note 3: For 5250 - 5350MHz Band: PSD Limit (dBm/MHz) = 11dBm/MHz - (6.42dBi - 6.00dBi) = 10.58dBm/MHz.


For 5470 - 5725MHz Band: PSD Limit (dBm/MHz) = 11dBm/MHz - (7.22dBi - 6.00dBi) = 9.78dBm/MHz.

## 802.11a Power Spectral Density - Ant 0 / Ant 0 + 1 (CDD Mode)


Channel 52 (5260MHz)

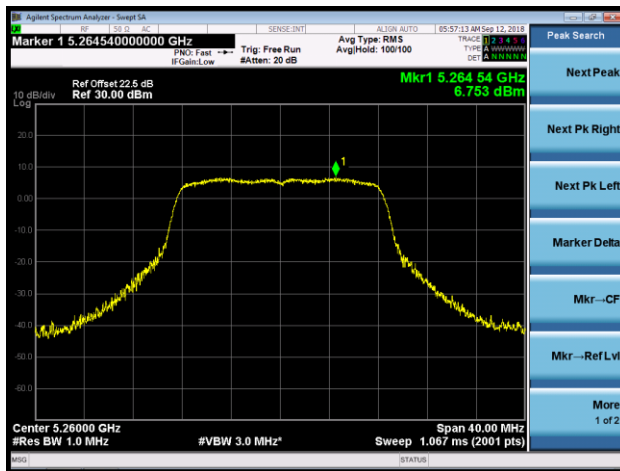


Channel 60 (5300MHz)

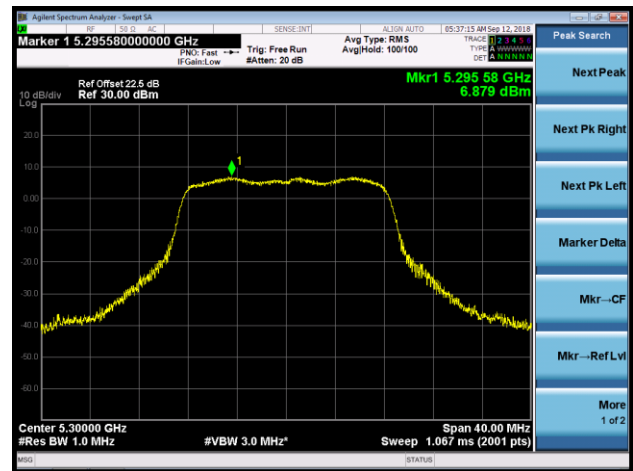


Channel 64 (5320MHz)

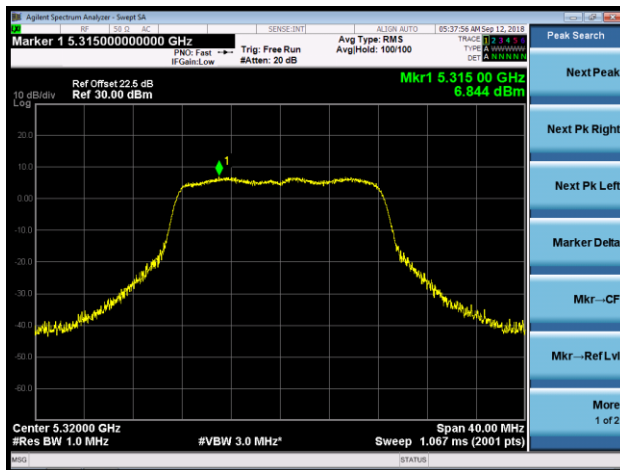


Channel 100 (5500MHz)

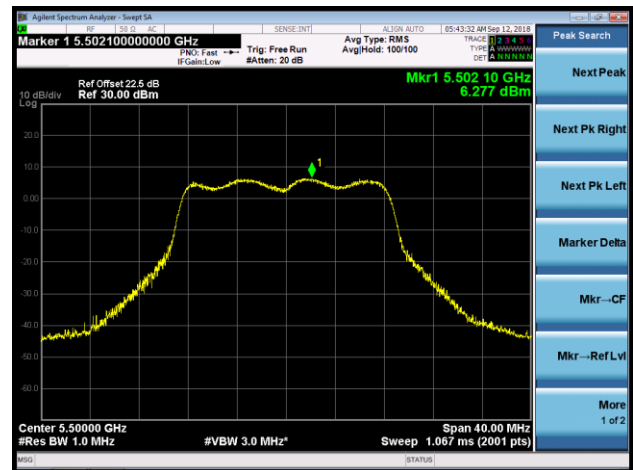


Channel 120 (5600MHz)

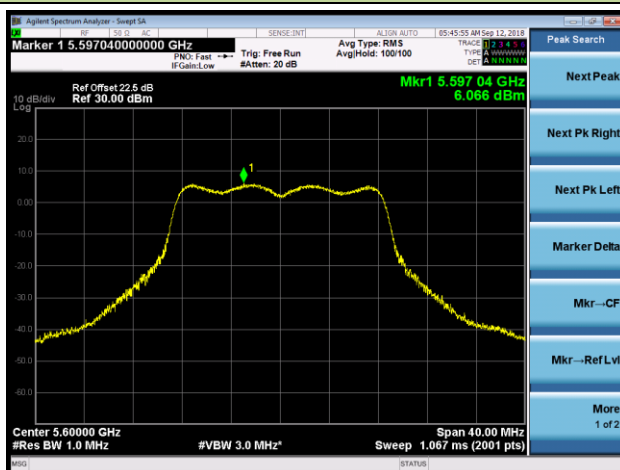

Channel 140 (5700MHz)

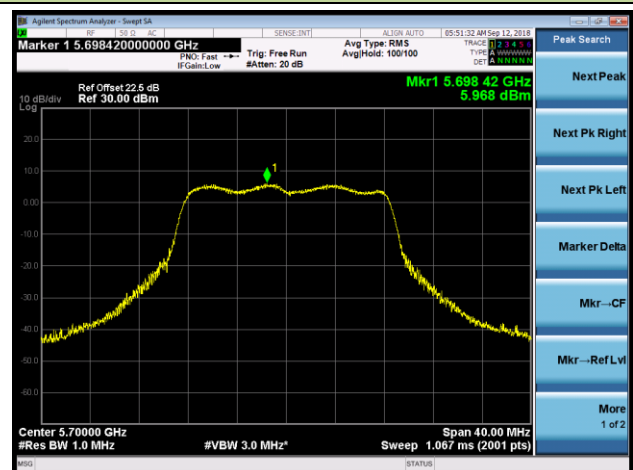


### Channel 144 (5720MHz)

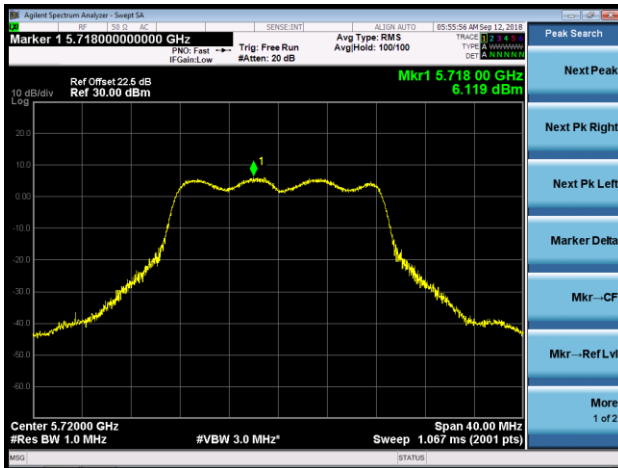


## 802.11ac-VHT20 Power Spectral Density - Ant 0 / Ant 0 + 1 (CDD Mode)


## Channel 52 (5260MHz)

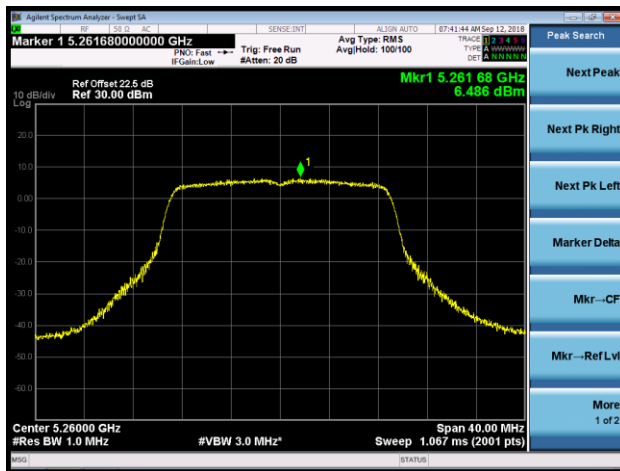


## Channel 60 (5300MHz)

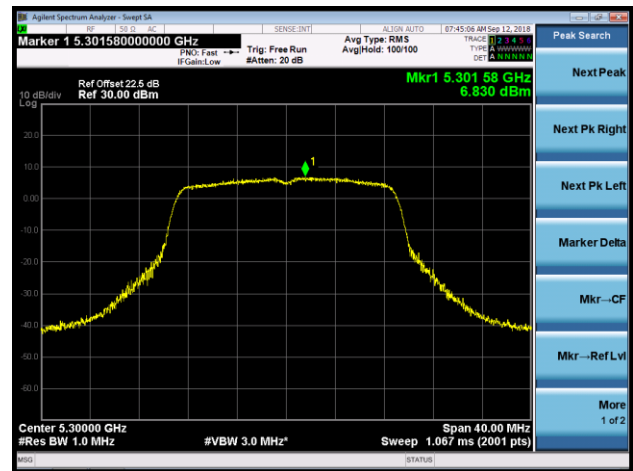


## Channel 64 (5320MHz)

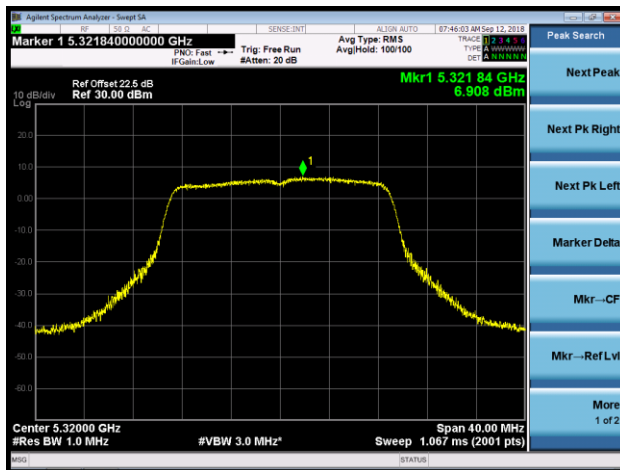


## Channel 100 (5500MHz)

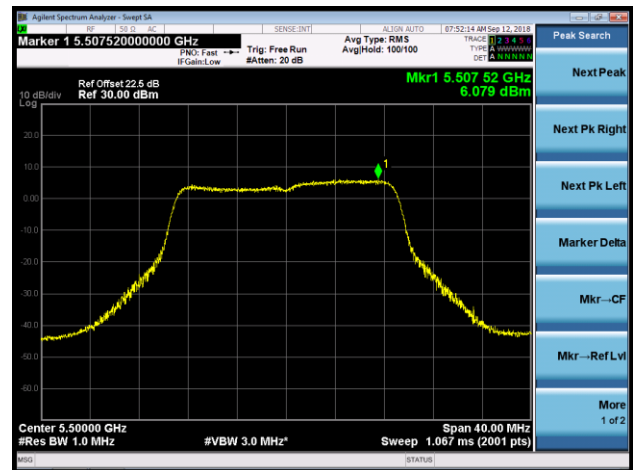


## Channel 120 (5600MHz)

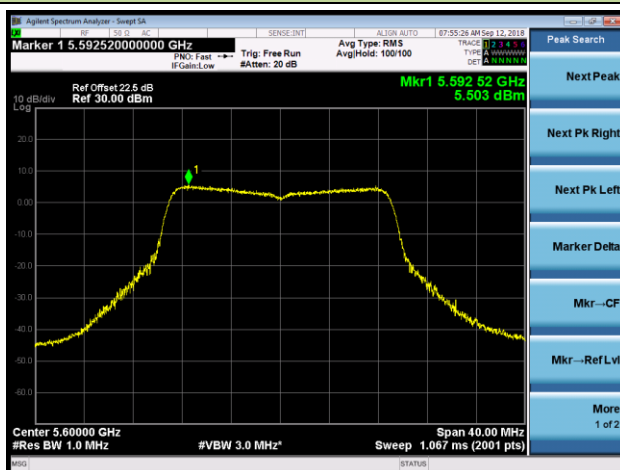

## Channel 140 (5700MHz)

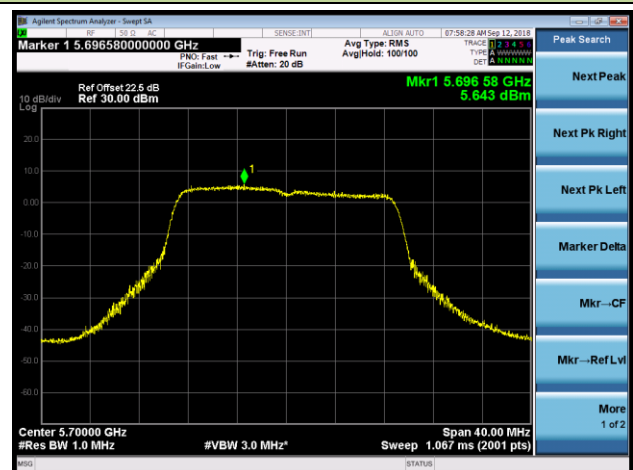


### Channel 144 (5720MHz)

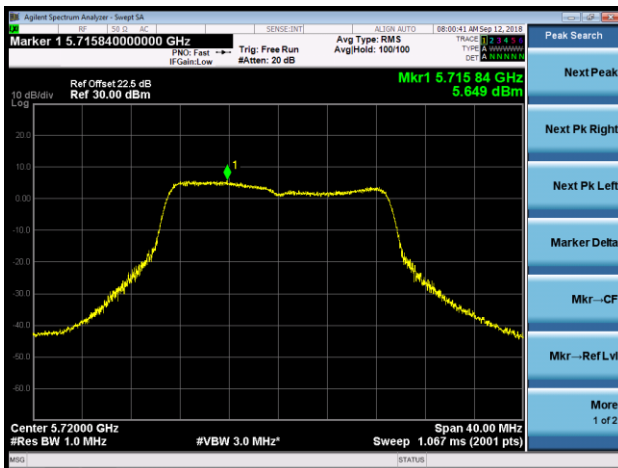


## 802.11ac-VHT40 Power Spectral Density - Ant 0 / Ant 0 + 1 (CDD Mode)


## Channel 54 (5270MHz)

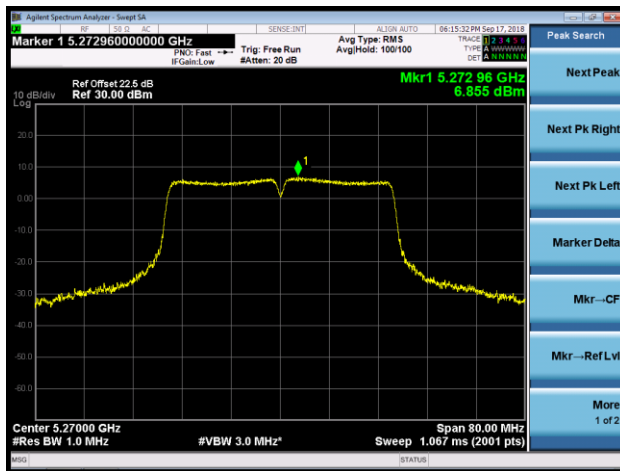


## Channel 62 (5310MHz)

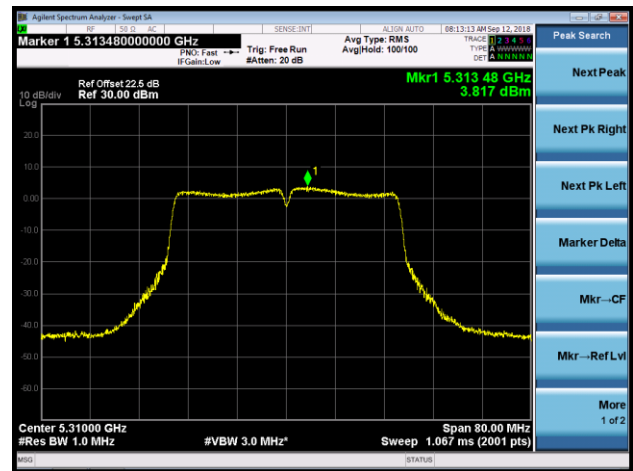


## Channel 102 (5510MHz)

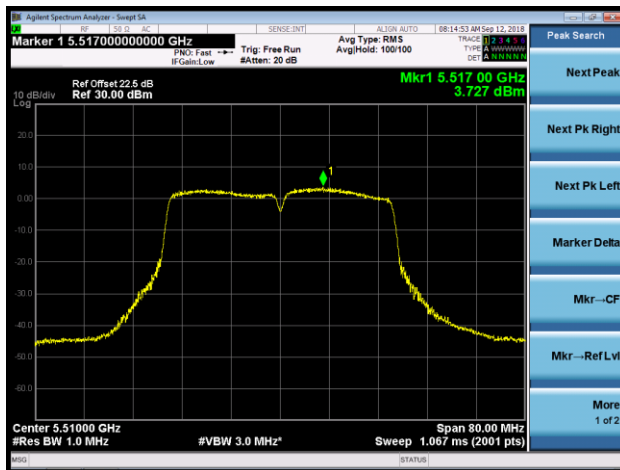


## Channel 118 (5590MHz)

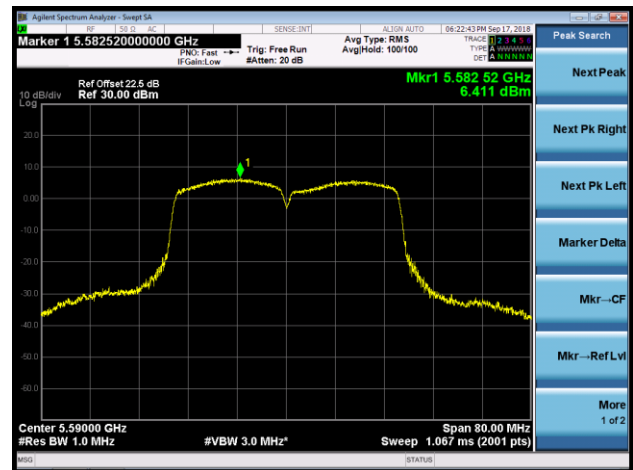

## Channel 134 (5670MHz)

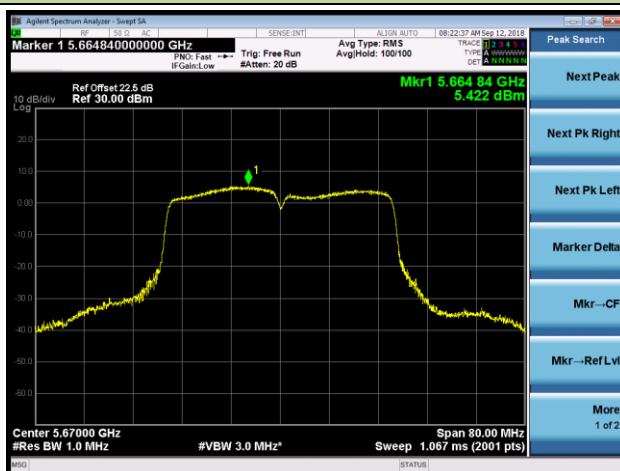


## Channel 142 (5710MHz)

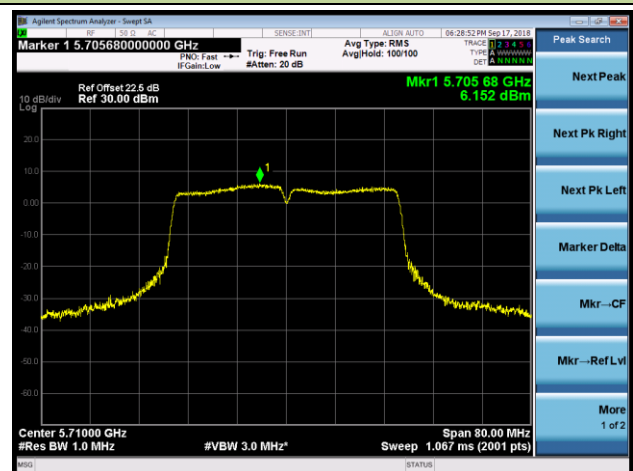


## 802.11ac-VHT80 Power Spectral Density - Ant 0 / Ant 0 + 1 (CDD Mode)

## Channel 58 (5290MHz)

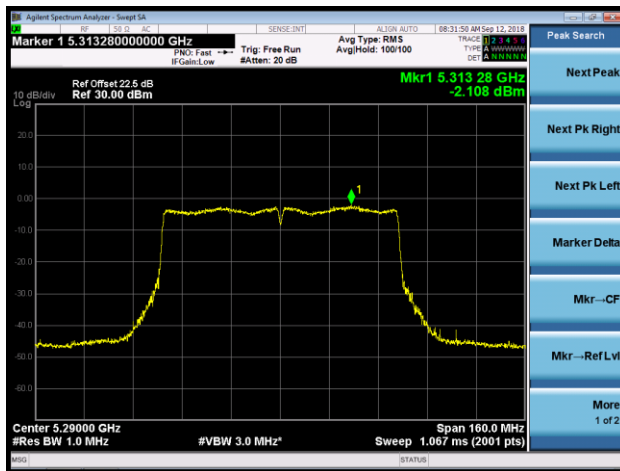

## Channel 106 (5530MHz)

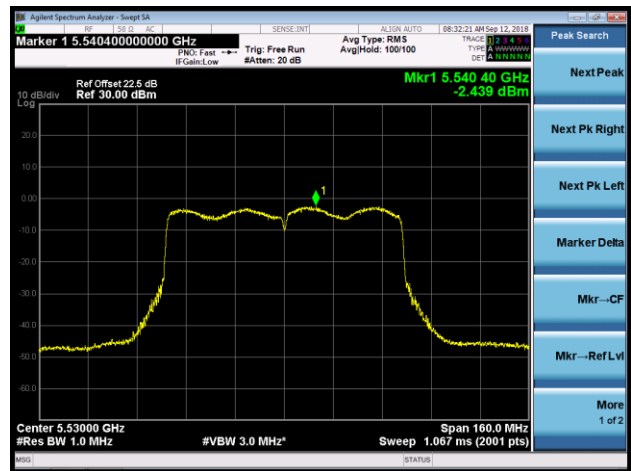

## Channel 122 (5610MHz)



## Channel 138 (5690MHz)

