

# User Manual

FX105F

Professional Android Device



## Table of Contents

<b>1. Copyright .....</b>	<b>3</b>
<b>2. Trademarks.....</b>	<b>3</b>
<b>3. Warnings and safety notices .....</b>	<b>4</b>
<b>4. Limitation of liability.....</b>	<b>4</b>
<b>5. About this manual .....</b>	<b>4</b>
<b>6. Device layout .....</b>	<b>5</b>
<b>Overview .....</b>	<b>5</b>
<b>Back view .....</b>	<b>5</b>
<b>Buttons and the related.....</b>	<b>6</b>
<b>7. Package contents.....</b>	<b>7</b>
<b>8. Getting started.....</b>	<b>8</b>
<b>How to switch the device ON or OFF .....</b>	<b>8</b>
<b>Home screen and synchronization .....</b>	<b>8</b>
<b>LED colors.....</b>	<b>10</b>
<b>How to access the dashboard .....</b>	<b>10</b>
<b>How to find your specific Famoco ID.....</b>	<b>11</b>
<b>How to charge the device.....</b>	<b>11</b>
<b>How to change the battery .....</b>	<b>12</b>
<b>How to use the battery .....</b>	<b>13</b>
<b>How to read an NFC card .....</b>	<b>13</b>
<b>About the SIM slots .....</b>	<b>14</b>
<b>9. Technical specifications .....</b>	<b>14</b>
<b>10. Warranty information .....</b>	<b>15</b>
<b>11. Safety and general information.....</b>	<b>16</b>
<b>Electromagnetic waves safety information– SAR.....</b>	<b>18</b>
<b>12. DOC .....</b>	<b>20</b>
<b>13 support band information and power.....</b>	<b>21</b>
<b>14 Restrictions in the 5 GHz band .....</b>	<b>21</b>
<b>15 FCC and IC warnings .....</b>	<b>22</b>

# 1. Copyright

Copyright ©2020 Famoco. All rights reserved.

This manual is protected under international copyright laws.

No part of this manual may be reproduced, distributed, translated, or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or storing in any information storage and retrieval system, without the prior written permission of Famoco.

We reserve the right to make modifications on print errors or update specifications without prior notice.

# 2. Trademarks

- Famoco and the Famoco logo are registered trademarks of Famoco.
- The Android logo is a trademark of Google, Inc.
- Bluetooth® is a registered trademark of Bluetooth SIG, Inc. worldwide.
- Wi-Fi® and the Wi-Fi logo are registered trademarks of the Wi-Fi Alliance.
- All other trademarks and copyrights are the property of their respective owners.

FAMOCO SAS

59 avenue Victor Hugo, 75116 Paris – FRANCE,

[contact@famoco.com](mailto:contact@famoco.com)

[www.famoco.com](http://www.famoco.com)

## **3. Warnings and safety notices**

Please read all the safety notices before using this device. Do not use the device near fuel or chemicals or in any prescribed area such as service stations and refineries. Do not transport or store flammable gas, liquid or explosives in the same compartment of your vehicle as your device and accessories.

## **4. Limitation of liability**

Famoco shall not be liable for any loss of profits or indirect, special, incidental or consequential damages resulting from or arising out of or in connection with using this product, whether or not Famoco had been advised, knew or should have known the possibility of such damages. The user should refer to the enclosed warranty card for full warranty and service information.

## **5. About this manual**

Congratulations on becoming the owner of a Famoco FX105 device. This user manual is specially designed to detail the device's functions and features.

Please read this manual before using the device to ensure safe and correct use.

- Descriptions are based on the device's default settings.
- Images and screenshots may differ in appearance from the actual product.
- Content may differ from the final product, or from software provided by service providers or carriers, and is subject to change without prior notice.
- Available features and additional services may vary by device, software, or service provider.

- Applications and their functions may vary by country, region, or hardware specifications. Famoco is not liable for performance issues caused by applications from any provider other than Famoco.
- Famoco is not liable for performance issues or incompatibilities caused by edited registry settings or modified operating system software. Attempting to customize the operating system may cause the device or applications to work improperly.


## 6. Device layout

### Overview



- 1 Indicator light
- 2 Power button
- 3 Volume down
- 4 Type USB-C port

### Back view

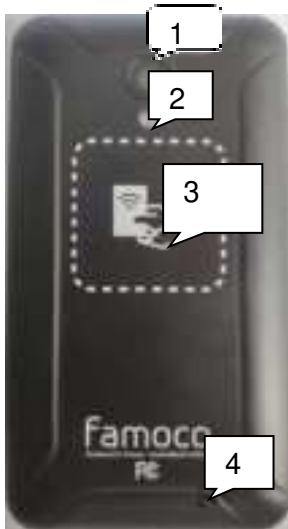

- 1 Rear Camera
- 2 Flash
- 3 NFC antenna
- 4 Speaker

## Buttons and the related

Name	Function
<b>Power button</b>	Long press: turn the device ON/OFF Short press: screen ON/OFF (standby mode)
<b>Customizable button</b>	Action can be defined by the customer
<b>Volume up &amp; down</b>	Press to turn the volume up or down
<b>USB Type C port</b>	Connect the device to a USB type C power source or computer
<b>Indicator light</b>	Turn red to indicate when the device is charging and green when full charge level is reached

## 7. Package contents

Check the product box for the following items:

Terminal  
Battery  
Charging Dock  
Charging cable  
User Manual

Note:

- The items supplied with the device and any available accessories may vary depending on the region or service provider.
- The supplied items are designed only for this device and may not be compatible with other devices.
- Appearances and specifications are subject to change without prior notice.
- Third-party accessories may not be compatible with your device.

## 8. Getting started

### How to switch the device ON or OFF

#### To power ON:



Press and hold the power button for three seconds then release. The home screen will be displayed after a few moments.

#### To power OFF:

Press and hold the power button for two seconds, then select shut down option on the screen.

#### Standby mode:

The device enters the standby mode after 30 seconds by default if left alone.

### Home screen and synchronization

Once your device is switched on it will start synchronizing.

If there are no applications installed on it yet, the device will be locked on a screen that shows the following indication to configure the internet connection:





To set up your device you need connectivity so that it can synchronize. Please install a SIM card or set up Wi-Fi or contact your customer support.

If there is a connection, one of the following screens will appear (depending on the synchronization status):



If the synchronization is in progress, please wait until it is complete.

If the synchronization is complete but no applications have been installed, or if the synchronization has been aborted, please contact your customer support.

## LED colors

The LED on the device can show different colors. Those colors are defined by the application but there are default features:



**Blinking red**

Low battery



**Red**

Battery charging



**Green**

Battery charged

## How to access the dashboard

When your device is switched on you can access the dashboard by pressing the volume up button for three seconds and then release it. In the dashboard you will find:



- Famoco serial number
- Connectivity
- Time
- Battery level
- Brightness (that you can modify)
- Volume (that you can modify)

## How to find your specific Famoco ID

There are two ways of finding the unique Famoco ID:  
Press the volume up button to access the dashboard and then press the owner's name. The Famoco ID is written at the top.

Or:

Open your device and remove the battery (see 8.6 for more information). The serial number is written on the device which is below the battery.

## How to charge the device



To charge the device, only use Type C port (1) cable supplied:

1. Insert the charger cable carefully. Check that the plug and socket are aligned.
2. The indicator light will turn red to indicate that the device is charging and will turn green when the full charge level is reached.
3. The battery will reach a full charge in 5-6 hours.

The device can also be charged by connecting it to a computer using



the type C cable supplied.

Connecting the charger improperly may cause serious damage to the device. Any damage caused by misuse is not covered by the warranty.

Note: The device will power off automatically when the battery reaches 2%.

## How to change the battery



1. Unclip the back-left corner where the little nook is and from this angle, remove the back cover.



2. Use the small nook on the bottom to remove the battery.

3. Insert the new battery with the pins located against the gold springs (with the label up).
4. Press the battery down into the case.
5. To replace the back cover, reverse step 1 and push gently to close

**6** Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

## **How to use the battery**

Charge the battery promptly when empty. Do not leave the battery in a discharged state.

Keep your device and battery cool. High temperatures degrade the battery more quickly. The battery will not charge when over 45°C.

Do not leave on charge for more than 10 hours.

When not using the device for long periods, charge to approximately 40% and remove the battery.

## **How to read an NFC card**

To read an NFC card, flip the device over and bring the card near the back of the device.

The device can read an NFC card at less than 3cm.

Device is able to read/write read/write NFC forum tags 1,2,3,4, Type MIFARE Classic Tag (full Mifare-ultralight/1k/4k)

## About the SIM/SAM slots

There are 3 slots in the back of the device. The first one is for the SIM card, the 2<sup>nd</sup> one for an external Secure Element and the 3<sup>rd</sup> is



- 1 SIM1 slot
- 2 SAM slot
- 3 SD card slot

MicroSD card.

Do not attempt to remove any of the installed cards.



In case of any operational problem, contact your administrator.

## 9. Technical specifications

Processor	Type	MTK6739WW, Quad-core, Cortex A53
	Speed	1.5GHz
OS		Famoco OS based on Android 8.1
Memory	RAM	2GB
	Mass Storage	16GB (ext. Micro SD)
Display	Characteristics	4" - 960x490 px
	Touch Panel	3 Points & Gesture

<b>Secure Elements</b>	Embedded SE	AT90
	Removable SE	SAM slot (2FF format)
<b>NFC</b>	Operating modes	Reader/writer ISO14443 A/B/C, Felica®, Mifare®
	Supported tags	NFC Forum 1,2,3,4. MIFARE
<b>Connectivity</b>	2G	GSM850/900/DCS1800/PCS1900 MHz
	3G	850/900/1900/2100 MHz
	4G	FDD:700a/700bc/700c/850/1700/1800/1900 /2600 MHz TDD: 2500/2600MHz
	Wi-Fi	Dual band (2.4GHz and 5GHz) 802.11 a/b/g/n
	Bluetooth	4.2
<b>Camera</b>	Rear camera	8 MP with auto-focus, flash
<b>Speaker, Microphone, Accelerometer</b>		Yes
<b>Size</b>	L x W x H	110*63.5*13.95mm
<b>Weight</b>		150g
<b>Battery</b>		2000mAh
<b>Power supply</b>		USB Type C

## 10. Warranty information

The warranty does not apply to defects or errors in the product caused by:

1. Normal wear and tear, misuse, mishandling, and physical damage.
2. Exposure to water or any other liquids or solvents.
3. Any unauthorized disassembly, repair or modification.
4. Power surges, lightning, fire, flood or other natural events.
5. Use with unauthorized third-party products such as generic chargers.
6. Any other cause beyond the range of normal usage for products.

7. The end-user shall have no right to reject, return, or receive a refund for any product under the above-mentioned situations, not excluding your statutory rights under national law.

## **11. Safety and general information**

The device contains delicate electronic circuitry, magnets, and battery systems. You should treat it with care and pay attention to the following points:

- Handle the device with care. Do not drop or throw the device. Do not immerse it in any liquid.
- Do not place the device near computer disks, credit cards, and other magnetic media. The information contained on disks or cards may be erased or damaged.
- Do not leave the device or battery in direct sunlight or near other heat sources where temperatures could exceed 45°C.
- Keep the device and all accessories away from children.
- In the unlikely event of battery leakage, avoid contact with eyes or skin. In the event of contact, rinse with water and consult a doctor.
- Observe and obey warning signs at petrol stations, airports, and hospitals.
- The operation of some medical electronic devices, such as hearing aids and pacemakers, may be affected by the device.
- Take care not to allow metal objects such as coins or keys to come into contact with the battery terminals.
- Do not dispose of batteries in a fire.



- Do not throw used batteries into household rubbish, return them to a recycling point.
- When the battery is thrown away cover the terminals with insulating tape.
- Be careful not to pierce the battery with sharp objects and do not use damaged batteries.
- Do not disassemble or modify the battery.
- Stop using the battery if abnormal heat, smell, discoloration, deformation, or abnormal condition is detected during use, charge, or storage.
- Do not put the battery in your mouth.
- Only use original replacement batteries.
- Do not connect the device to non-genuine or 3rd party chargers.
- Do not attempt to dismantle the device or any of its accessories.
- Do not put the device into a microwave oven, dryer, or high-pressure container.
- Don't use the device immediately after a sudden temperature change e.g. from an air-conditioned environment to high temperature and humidity outside. In such cases, there could be condensing moisture inside the device, which can cause internal damage. Switch off and leave for 30 minutes before use.
- Do not use the device where blasting is in progress.
- Do not leave the device at the bottom of the bag where it may be damaged by sharp objects.
- Take care when the device is in your pocket.

- Sitting down or sharp objects may damage the device.
- At high volume, ever-lasting listening to audio devices can cause hearing loss.
- Do not leave the device discharged or disconnected for long periods of time; your personal data may be lost, and your battery life will be reduced.
- Under poor network conditions, battery life is considerably reduced.
- Please recycle the packaging and all parts.
- Emergency service coverage is dependent on network availability and battery status.
- It is always good practice to switch off the device regularly.
- Do not expose the device to oils or solvents.
- It is normal for the device to become warm while the battery is being charged.
- The information & images in this guide are valid at the time of publication of the guide. Changes to this information & images can be made without prior notice.

## **12. Electromagnetic waves safety information – SAR**

The highest reported SAR level for the head is 0.456 W/kg, for the Hotspot Body is 1.020W/kg, and for the Body Worn is 0.540W/kg. This device was tested for typical body-worn operations with the back of the handset kept 15mm from the body. To maintain compliance with RF exposure requirements, use accessories that maintain a sufficient separation distance between the user's body and the back of the handset .The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with RF exposure

requirements, and should be avoided.

**NOTE:**

- i. The SAR value may vary, depending on national reporting and testing requirements and the network band.
- i. Do not use your device in certain locations such as aircraft, hospitals, service stations and professional garages or while driving a vehicle. The electromagnetic waves from the device can disrupt the performance of electronic devices used in these locations.
- i. We recommend that you switch off your device or switch it to flight mode in these locations to avoid interference.

- iv. If you use an electronic implant (pacemakers, insulin pumps, neurostimulators, etc.), please keep a distance of 15cm between the device and your electronic implant.
- v. When using a pedestrian kit, headphones or headset, pregnant women should keep the device away from their abdomen and teenagers should keep the device away from their lower abdomen.

Advice to reduce the level of exposure to radiation:

- Please use your device where reception is good to reduce the quantity of radiation received (avoid using in an underground car park or when travelling (train or car)).
- A reception icon indicates the quality of reception on your device. A 4-full bar display means that reception is good.

## 13. DOC:

### simplified EU declaration of conformity

The simplified EU declaration of conformity referred to in Article 10(9) shall be provided as follows:  
Hereby, FAOCO SAS declares that the radio equipment type FX105 is in compliance with Directive 2014/53/EU, The full text of the eu declaration of conformity is available at the following internet address: [www.famoco.com](http://www.famoco.com)

# 14. support band information and power set

FX105 radio equipment operates with the following frequency bands and maximum radio-frequency power

Type	Supported frequency bands		Power(dBm)
2G	850		33
	900		33
	1800		30
	1900		30
3G	850		24
	900		24
	1900		24
	2100		24
4G	BAND 2		23
	BAND 3		23
	BAND 4		23
	BAND 5		23
	BAND 7		23
	BAND 12		23
	BAND 13		23
	BAND 17		23
	BAND 38		23
	BAND 41		23
WIFI	2.4G	16±1	
	5G	15±1	
BT	8±1		
BLE	7±1		

# 15. Restrictions in the 5 GHz band

According to Article 10(10) of Directive 2014/53/EU, the packaging shows that this radio equipment will be subject to some restrictions when placed on the market in Belgium(BE), Bulgaria(BG), the Czech Republic(CZ), Denmark(DK), Germany(DE), Estonia(EE), Ireland(IE), Greece(EL),Spain(ES),France(FR), Croatia(HR), Italy(IT),Cyprus(CY), Latvia(LV), Lithuania(LT),Luxembourg(LU), Hungary(HU), Malta(MT), Netherlands(NL), Austria(AT),Poland(PL), Portugal(PT), Romania(RO), Slovenia(SI), Slovakia(SK), Finland(FI), Sweden(SE), the United Kingdom(UK), Turkey(TR), Norway(NO),Switzerland(CH), Iceland(IS), an

# 16. FCC and IC warnings

## FCC Statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device may accept any interference received, including interference that may cause undesired operation .

## FCC Statement:

"This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. And can radiate radio frequency energy and, if not installed and used in the following, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. To radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help."

Any changes or modifications not expressly approved by the party responsible for compliance could void the users authority to operate this equipment.

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device may accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :  
(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with Industry Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme à l'exposition aux rayonnements Industry Canada limites établies pour un environnement non contrôlé.

