

RF Test Data for Bluetooth (Conducted Measurements)

General Description of EUT	
EUT Name:	Mobile Lidar Scanner
Model:	Lixel L2 Pro-16/120
Sample ID:	HC-C-202409-0005-5-01
Test Standard:	FCC Part 15.247
Environmental Conditions	
Ambient Temperature:	23.8℃
Ambient Humidity:	47%RH
Test Power Supply:	DC 14.4V
Test Engineer:	Jolin.li
Note: For a more detailed features description, please refer to the report TBR-C-202409-0005-111.	

Contents


1.	Duty Cycle	3
2.	Maximum Conducted Output Power	9
3.	-20dB Bandwidth	18
4.	Occupied Channel Bandwidth	24
5.	Band Edge	30
6.	Band Edge(Hopping)	37
7.	Conducted RF Spurious Emission	44
8.	Restrict Band	54
9.	Carrier Frequencies Separation	61
10.	Number of Hopping Channel	64
11.	Dwell Time	67

1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH1	2402	Ant1	32	4.95	2.5
NVNT	1-DH1	2441	Ant1	32.8	4.84	2.44
NVNT	1-DH1	2480	Ant1	32.8	4.84	2.44
NVNT	2-DH1	2402	Ant1	32	4.95	2.5
NVNT	2-DH1	2441	Ant1	32	4.95	2.5
NVNT	2-DH1	2480	Ant1	32	4.95	2.5
NVNT	3-DH1	2402	Ant1	32	4.95	2.5
NVNT	3-DH1	2441	Ant1	32	4.95	2.5
NVNT	3-DH1	2480	Ant1	32	4.95	2.5

Test Graphs


Duty Cycle NVNT 1-DH1 2402MHz Ant1

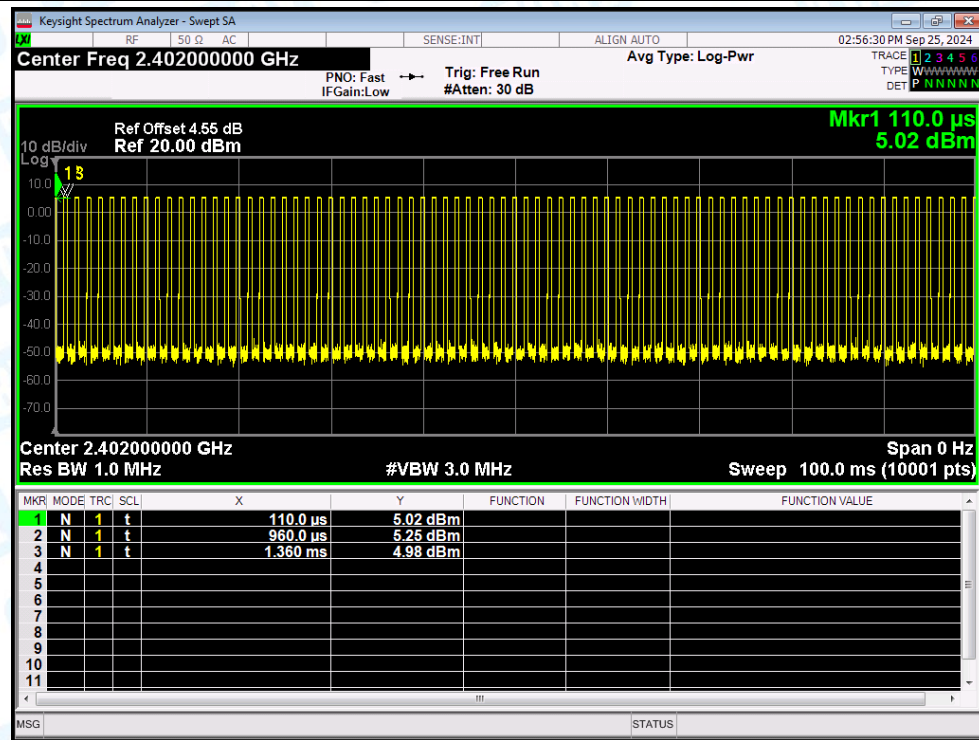


Duty Cycle NVNT 1-DH1 2441MHz Ant1

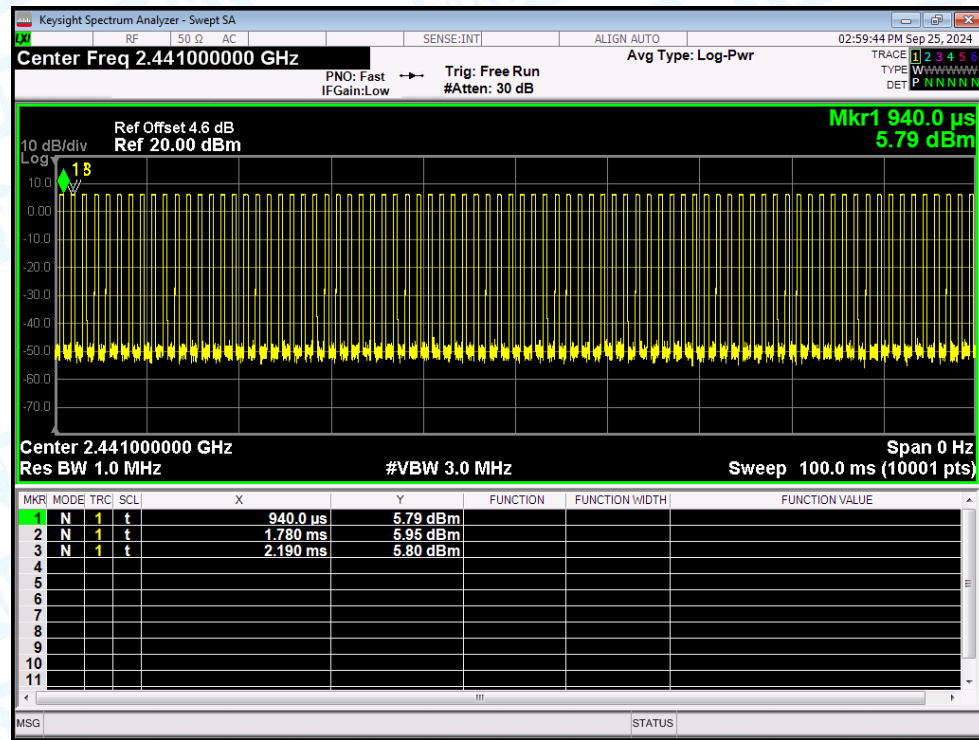


Duty Cycle NVNT 1-DH1 2480MHz Ant1

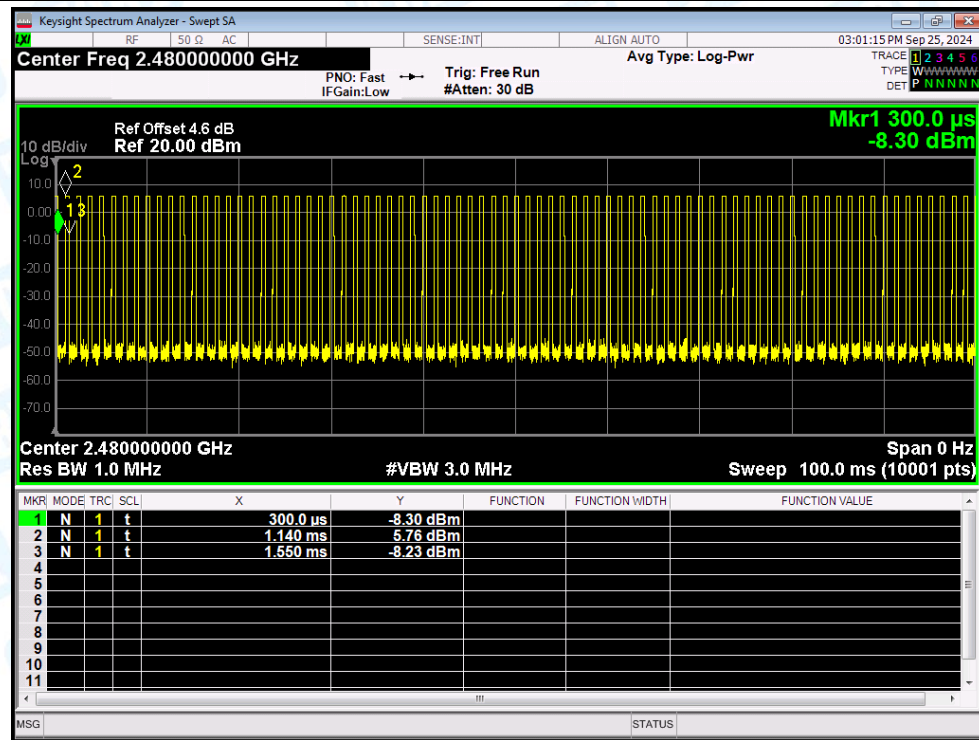


Duty Cycle NVNT 2-DH1 2402MHz Ant1

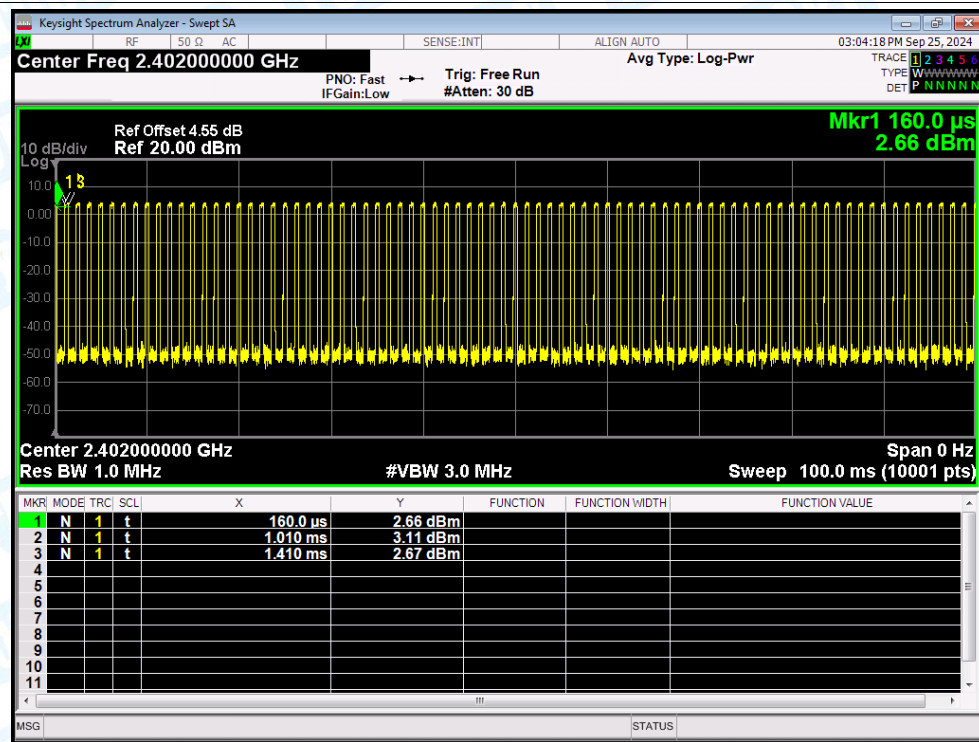


Duty Cycle NVNT 2-DH1 2441MHz Ant1

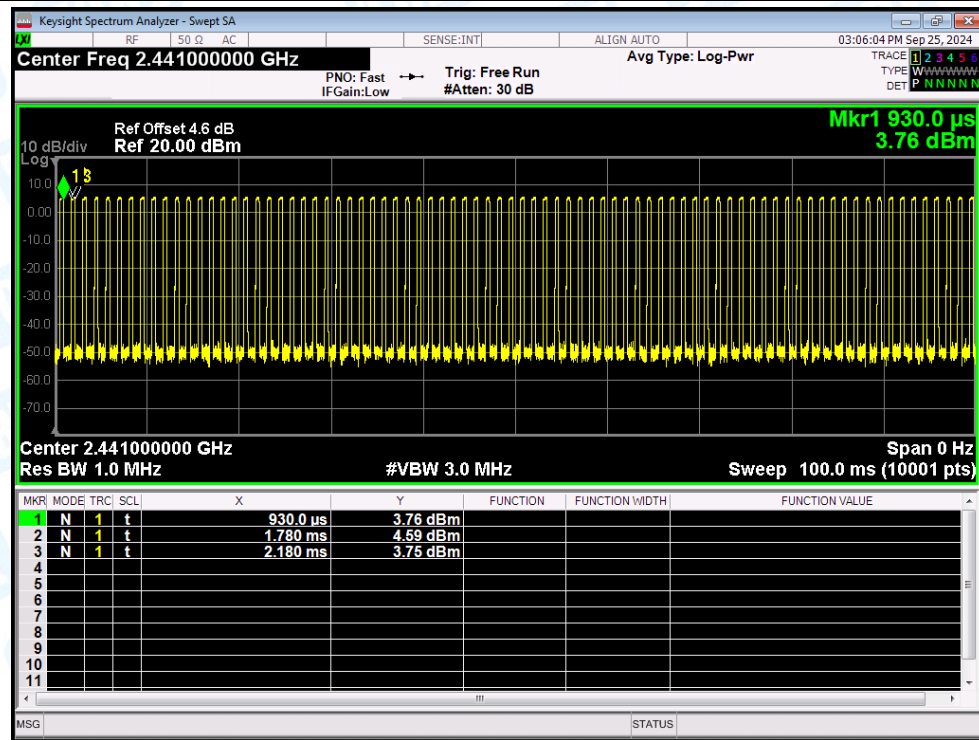


Duty Cycle NVNT 2-DH1 2480MHz Ant1

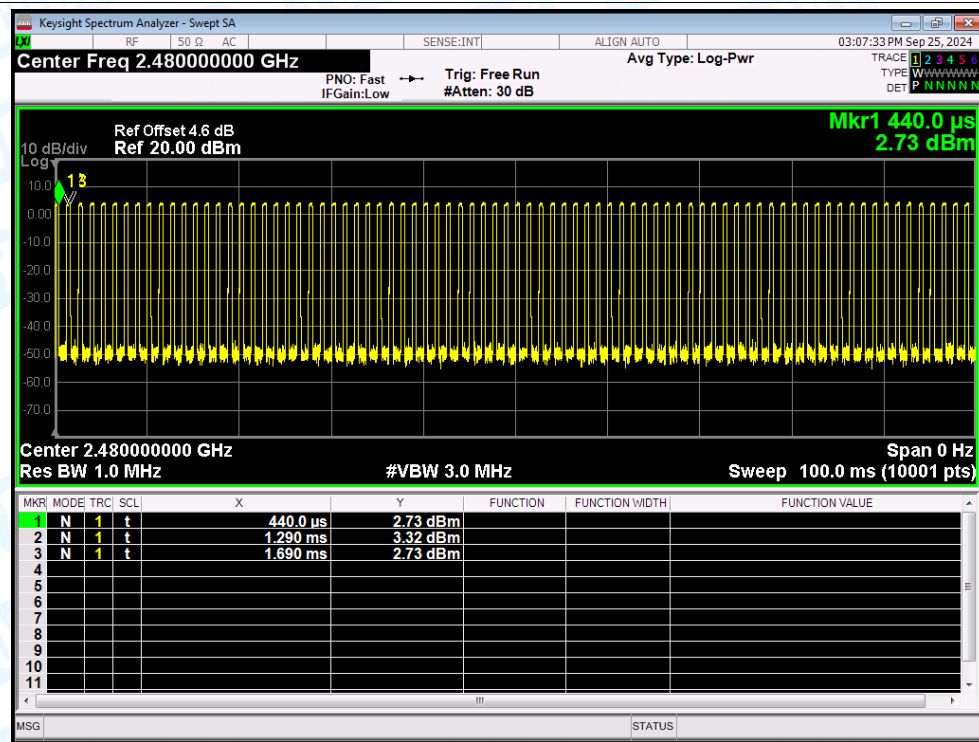


Duty Cycle NVNT 3-DH1 2402MHz Ant1

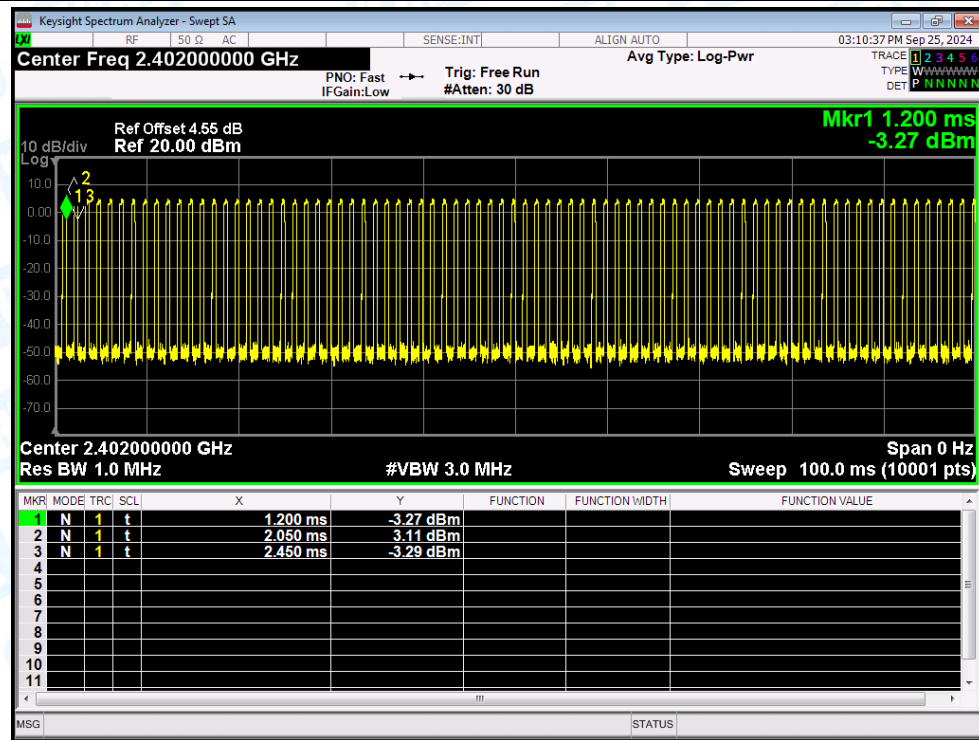

Duty Cycle NVNT 3-DH1 2441MHz Ant1

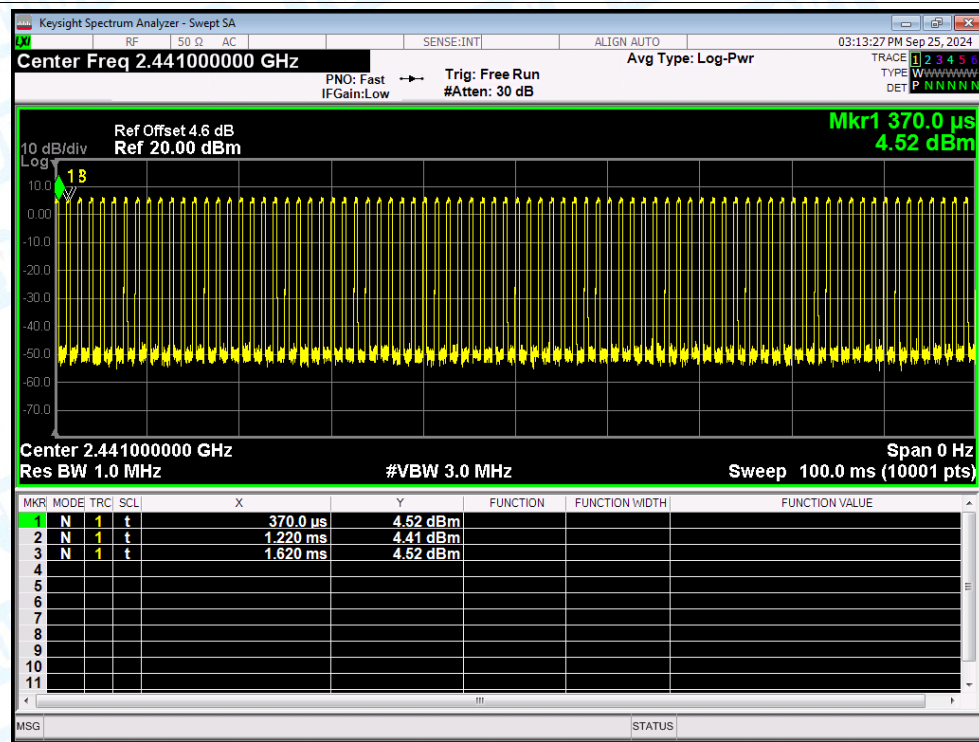

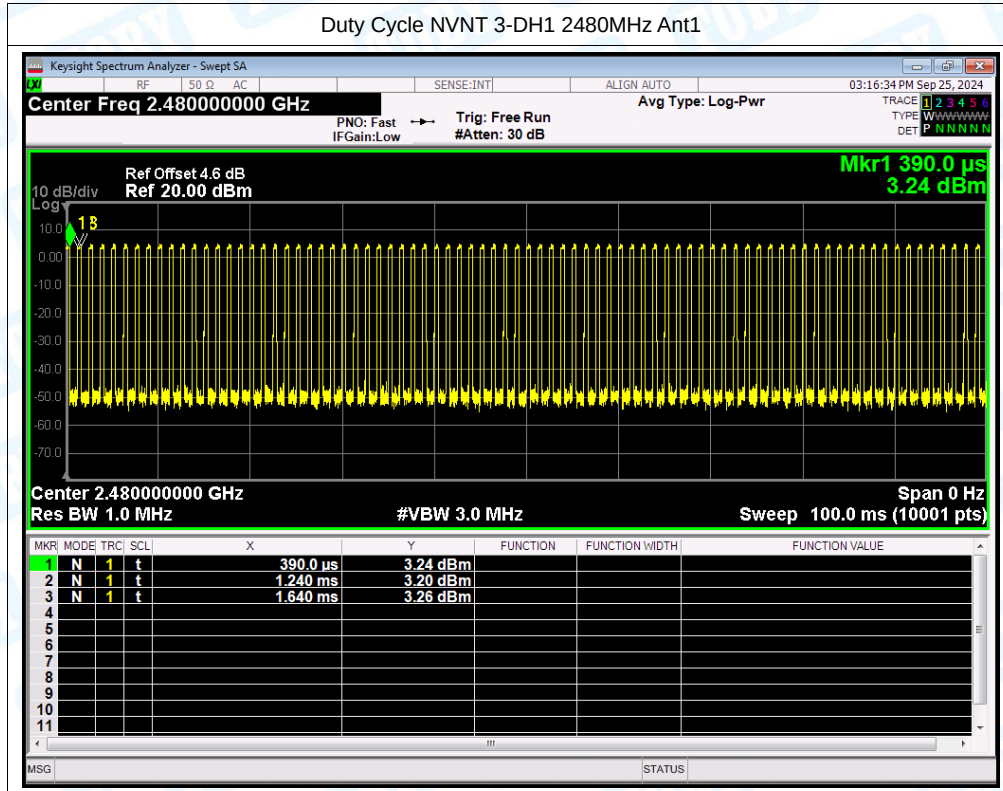


2. Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	5.461	21	Pass
NVNT	1-DH1	2441	Ant1	6.23	21	Pass
NVNT	1-DH1	2480	Ant1	6.014	21	Pass
NVNT	1-DH3	2441	Ant1	6.525	21	Pass
NVNT	1-DH5	2441	Ant1	6.498	21	Pass
NVNT	2-DH1	2402	Ant1	4.815	21	Pass
NVNT	2-DH1	2441	Ant1	6.073	21	Pass
NVNT	2-DH1	2480	Ant1	4.838	21	Pass
NVNT	2-DH3	2441	Ant1	6.245	21	Pass
NVNT	2-DH5	2441	Ant1	6.234	21	Pass
NVNT	3-DH1	2402	Ant1	5.036	21	Pass
NVNT	3-DH1	2441	Ant1	6.519	21	Pass
NVNT	3-DH1	2480	Ant1	5.278	21	Pass
NVNT	3-DH3	2441	Ant1	6.516	21	Pass
NVNT	3-DH5	2441	Ant1	6.678	21	Pass

Test Graphs


Power NVNT 1-DH1 2402MHz Ant1

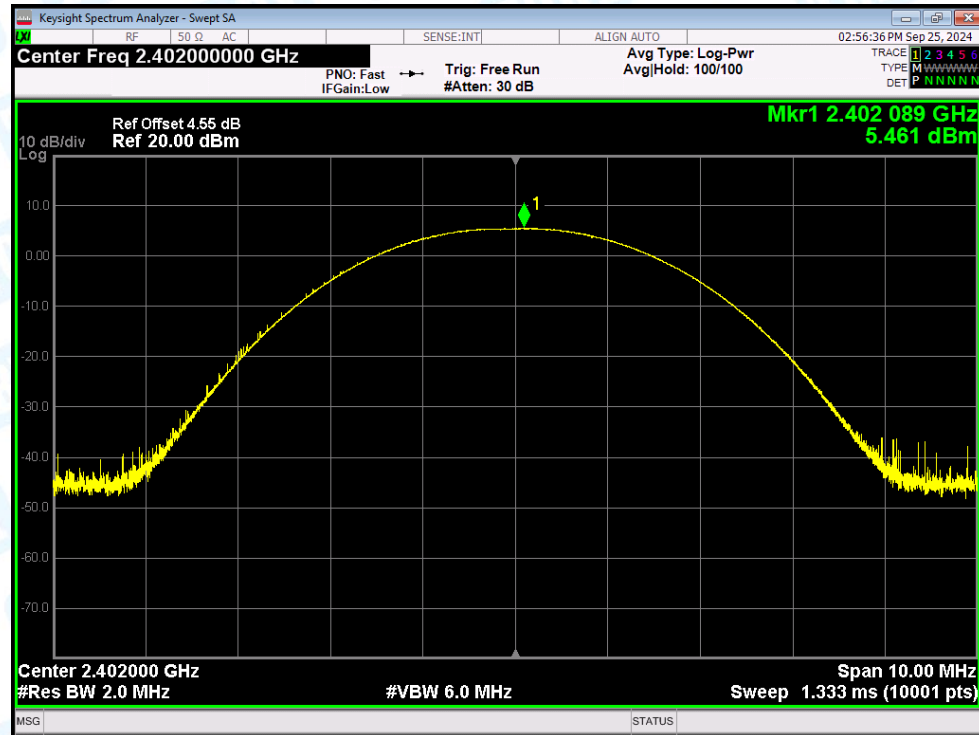


Power NVNT 1-DH1 2441MHz Ant1

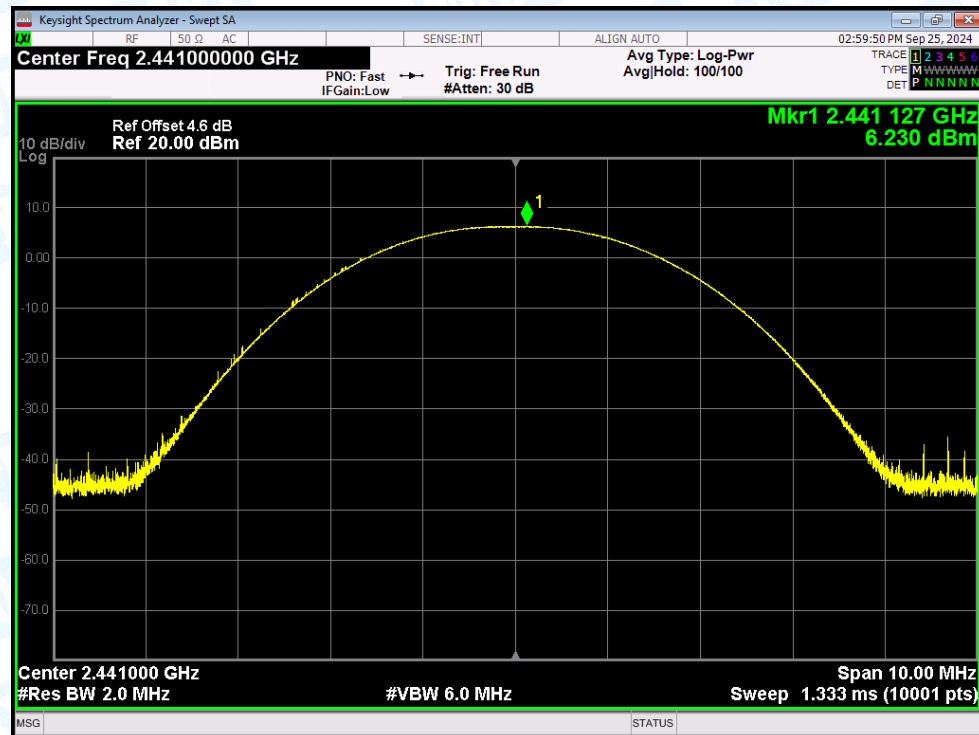


Power NVNT 1-DH1 2480MHz Ant1

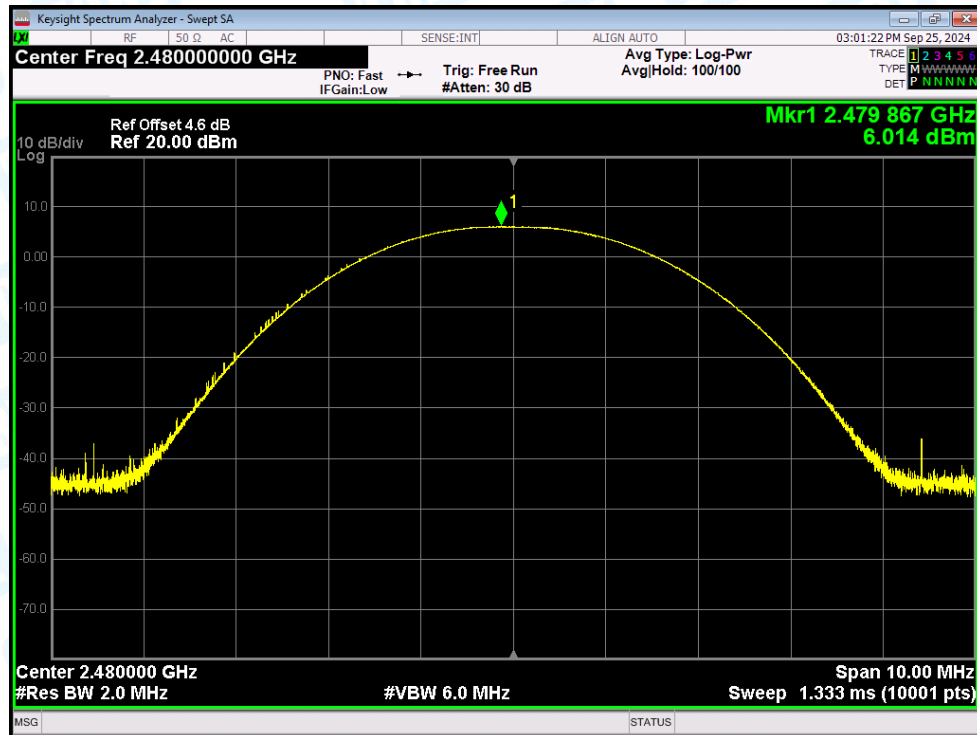


Power NVNT 1-DH3 2441MHz Ant1

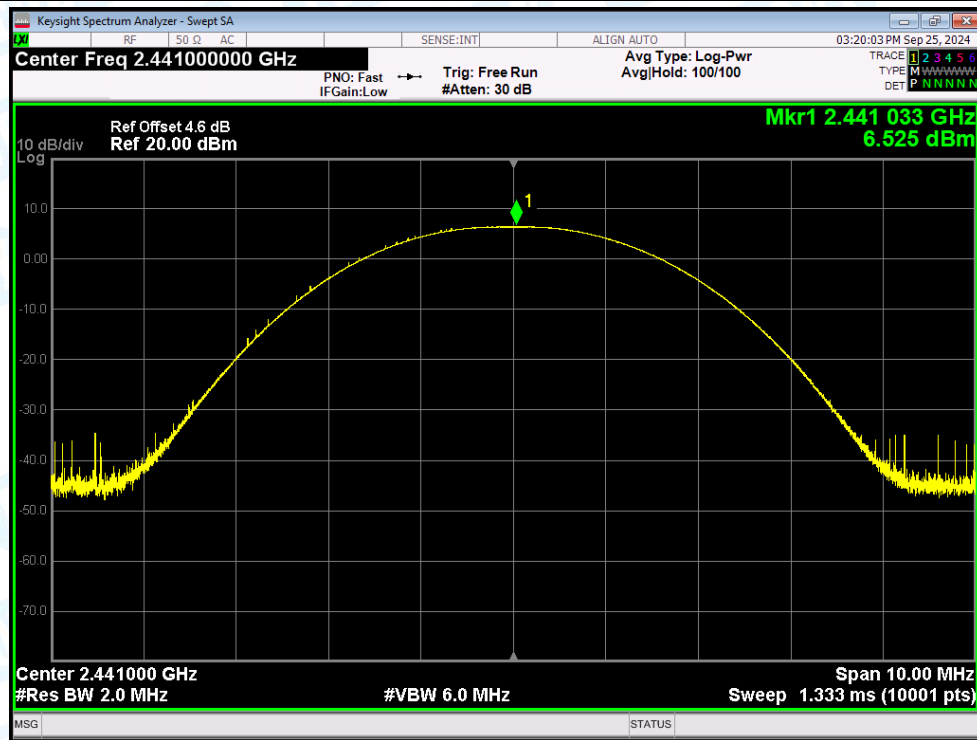


Power NVNT 1-DH5 2441MHz Ant1

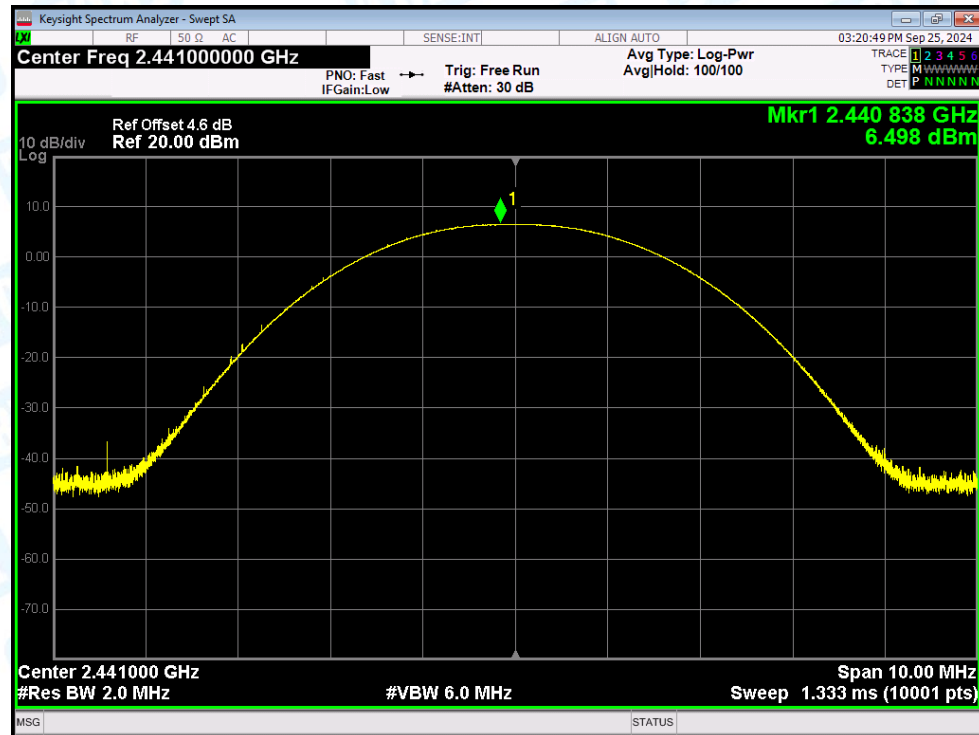


Power NVNT 2-DH1 2402MHz Ant1

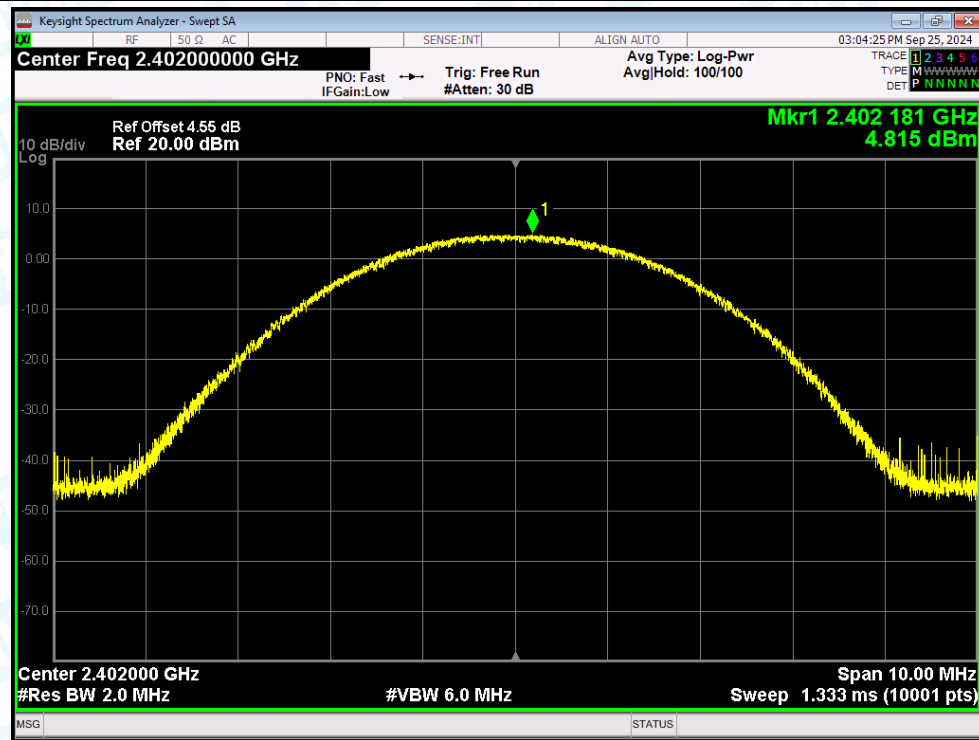


Power NVNT 2-DH1 2441MHz Ant1

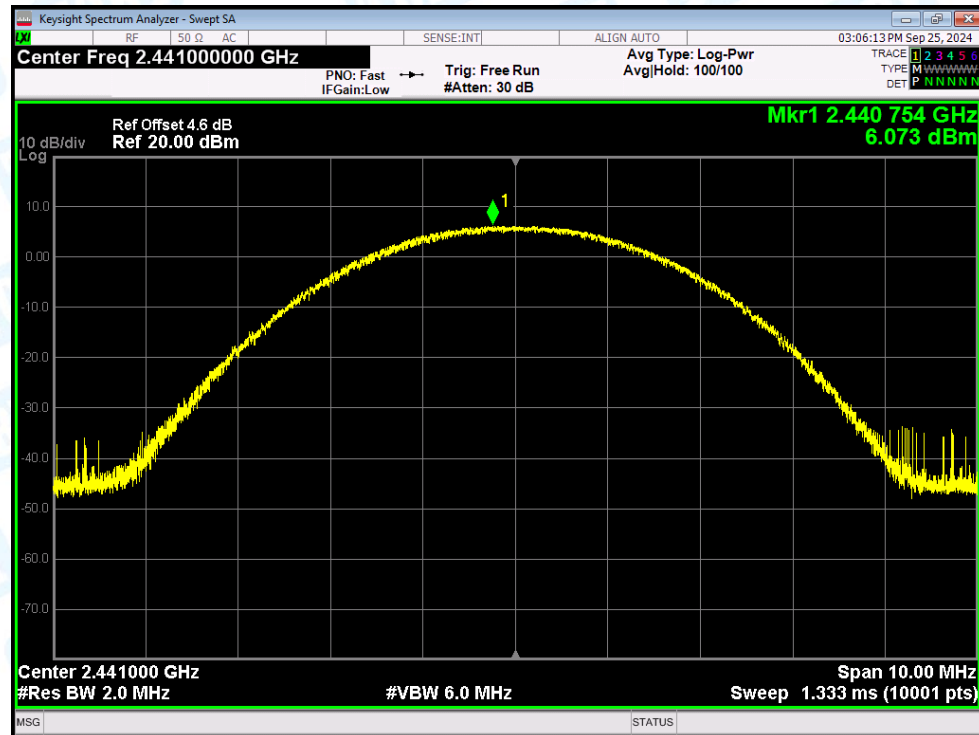


Power NVNT 2-DH1 2480MHz Ant1

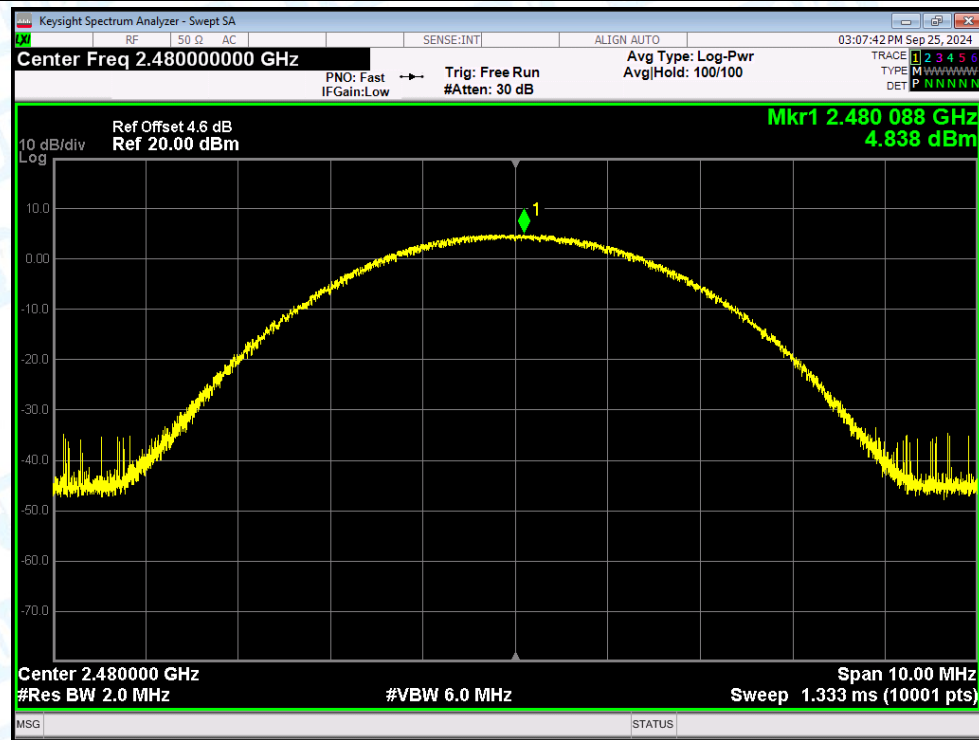


Power NVNT 2-DH3 2441MHz Ant1

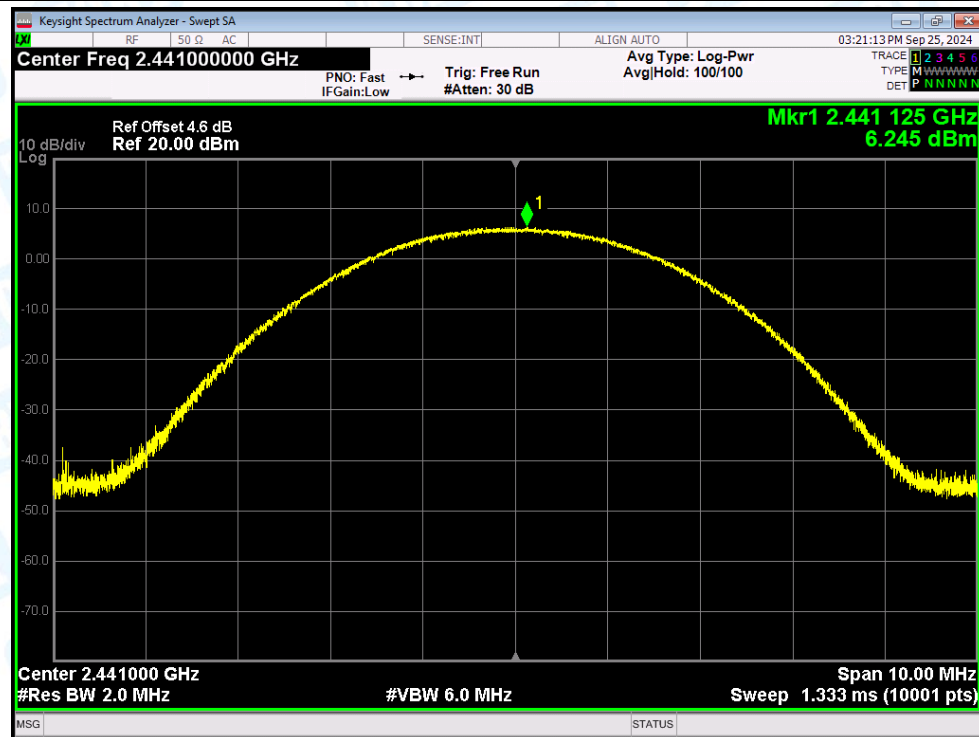


Power NVNT 2-DH5 2441MHz Ant1

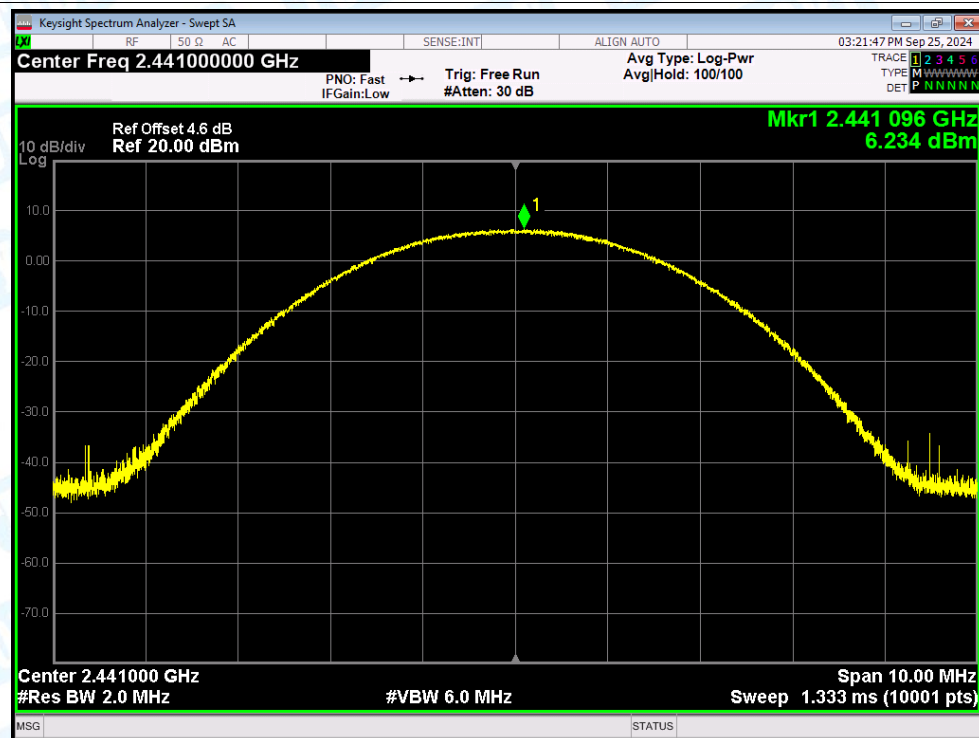


Power NVNT 3-DH1 2402MHz Ant1

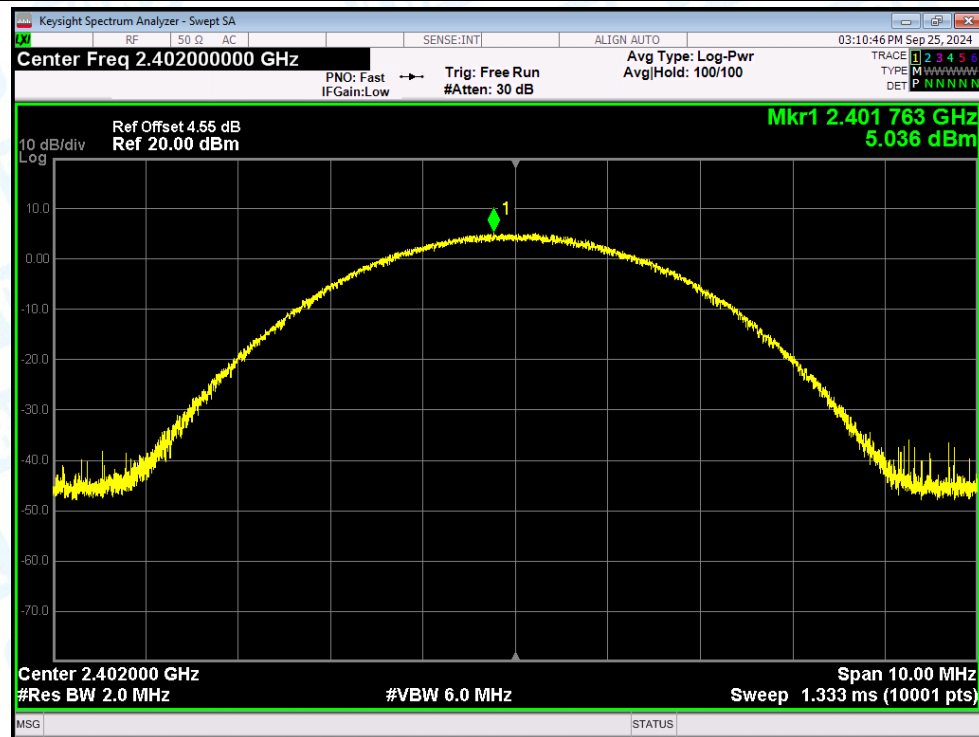


Power NVNT 3-DH1 2441MHz Ant1

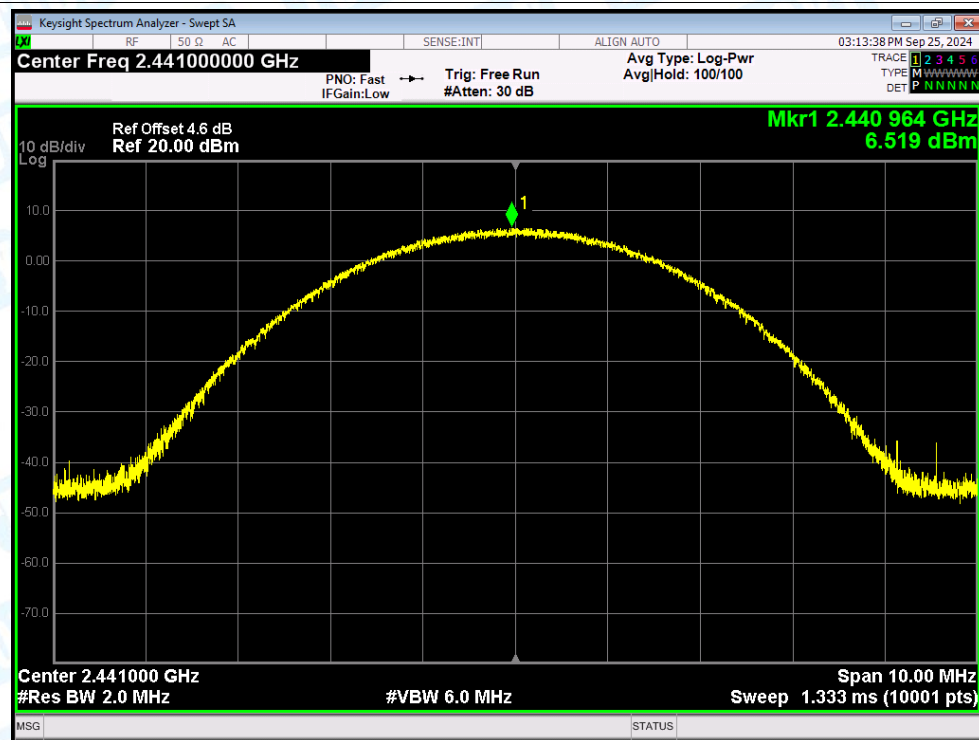

Power NVNT 3-DH1 2480MHz Ant1

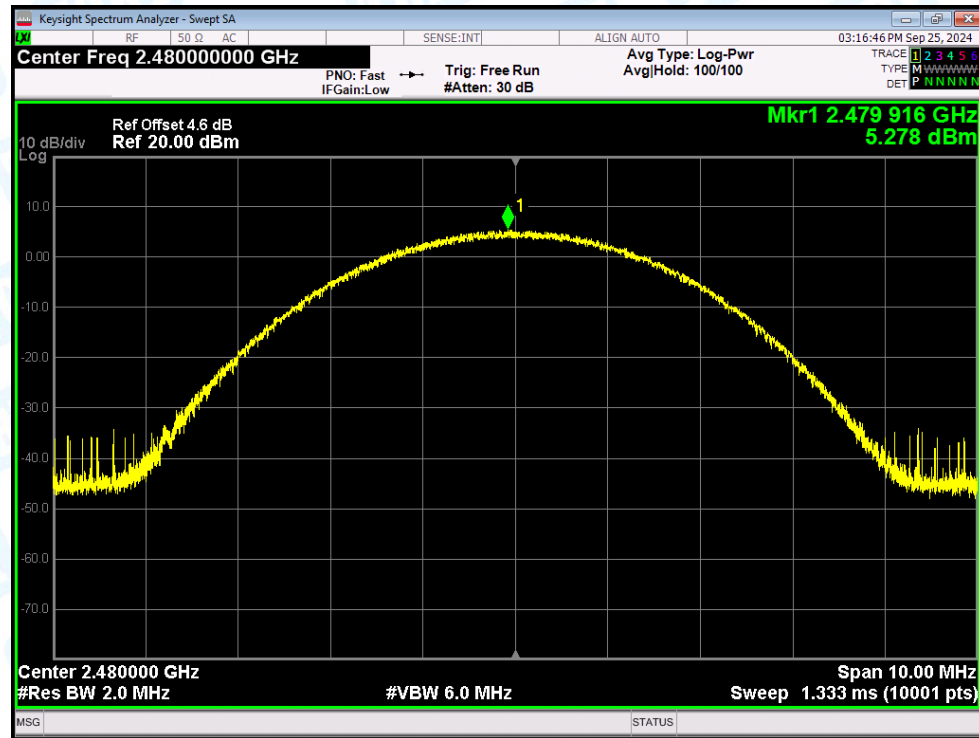

Power NVNT 3-DH3 2441MHz Ant1

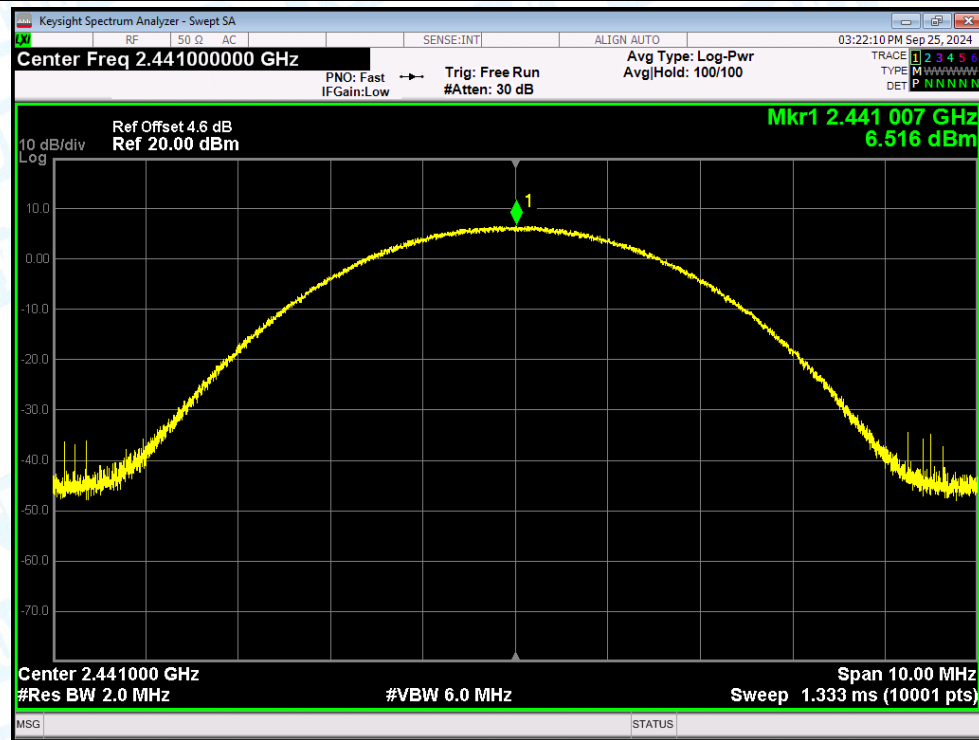




3. -20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.93	---	Pass
NVNT	1-DH1	2441	Ant1	0.88	---	Pass
NVNT	1-DH1	2480	Ant1	0.92	---	Pass
NVNT	2-DH1	2402	Ant1	1.26	---	Pass
NVNT	2-DH1	2441	Ant1	1.26	---	Pass
NVNT	2-DH1	2480	Ant1	1.26	---	Pass
NVNT	3-DH1	2402	Ant1	1.24	---	Pass
NVNT	3-DH1	2441	Ant1	1.25	---	Pass
NVNT	3-DH1	2480	Ant1	1.23	---	Pass

Test Graphs


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

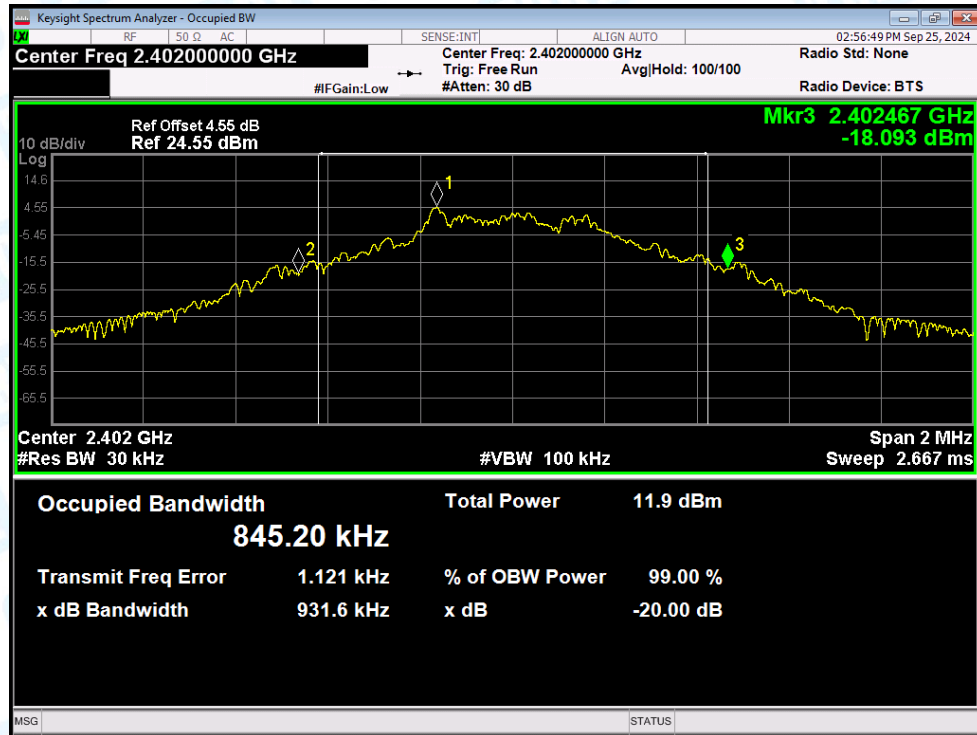


-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

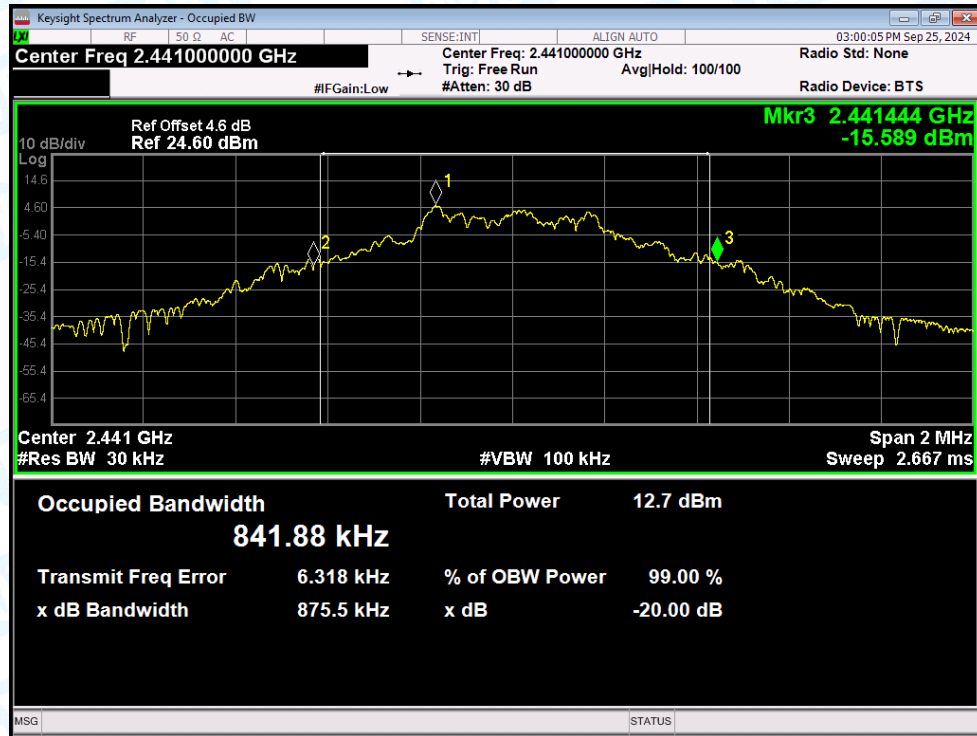


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

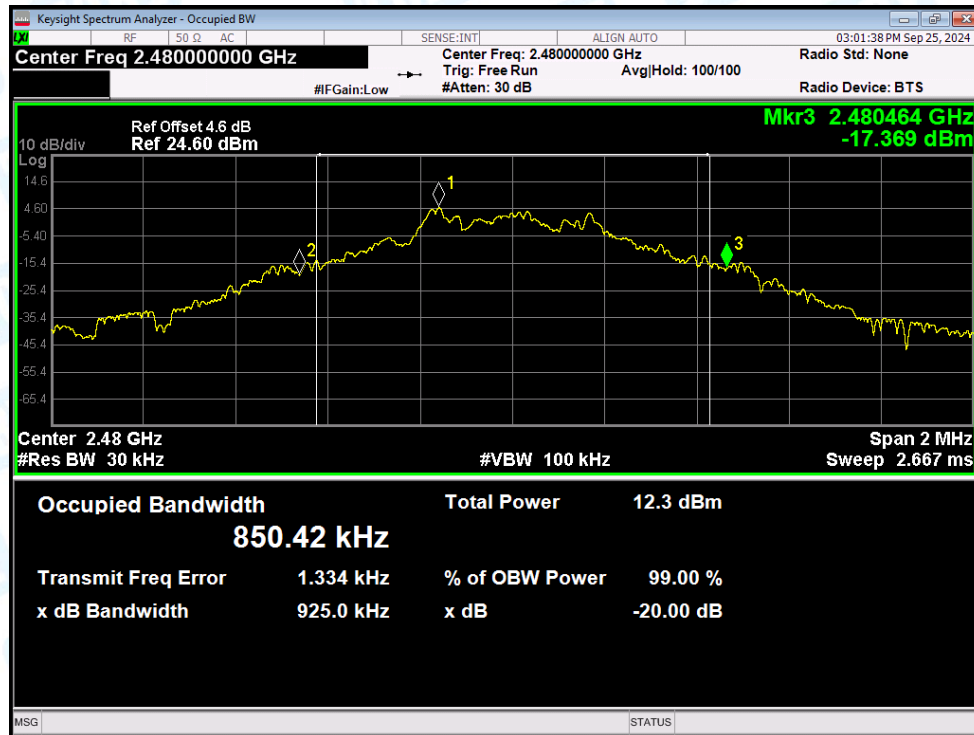


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

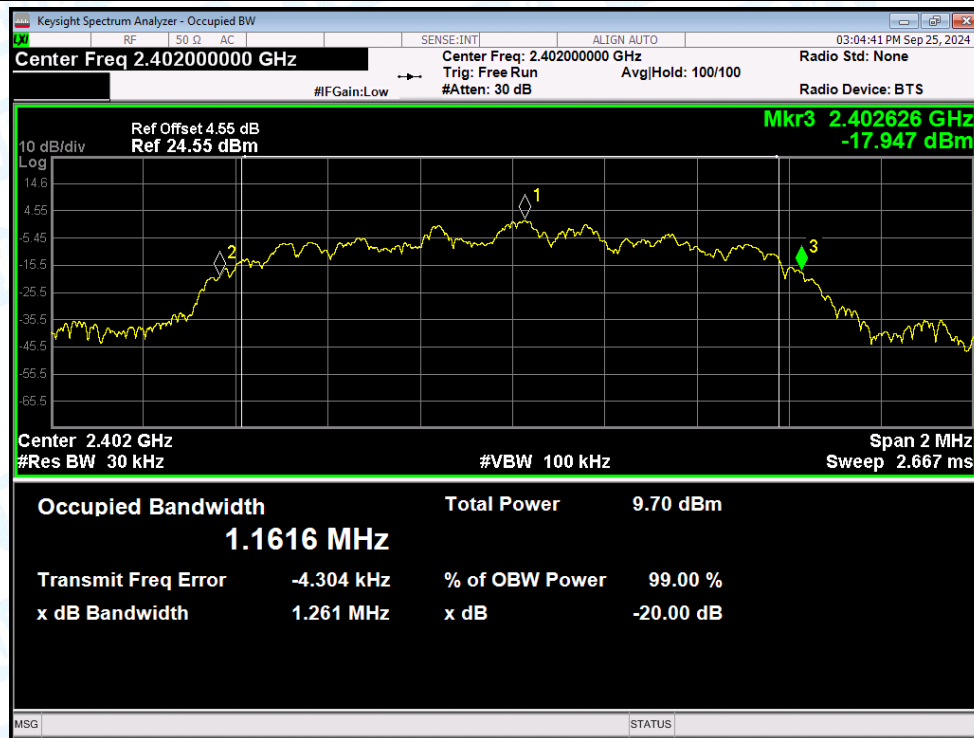


-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

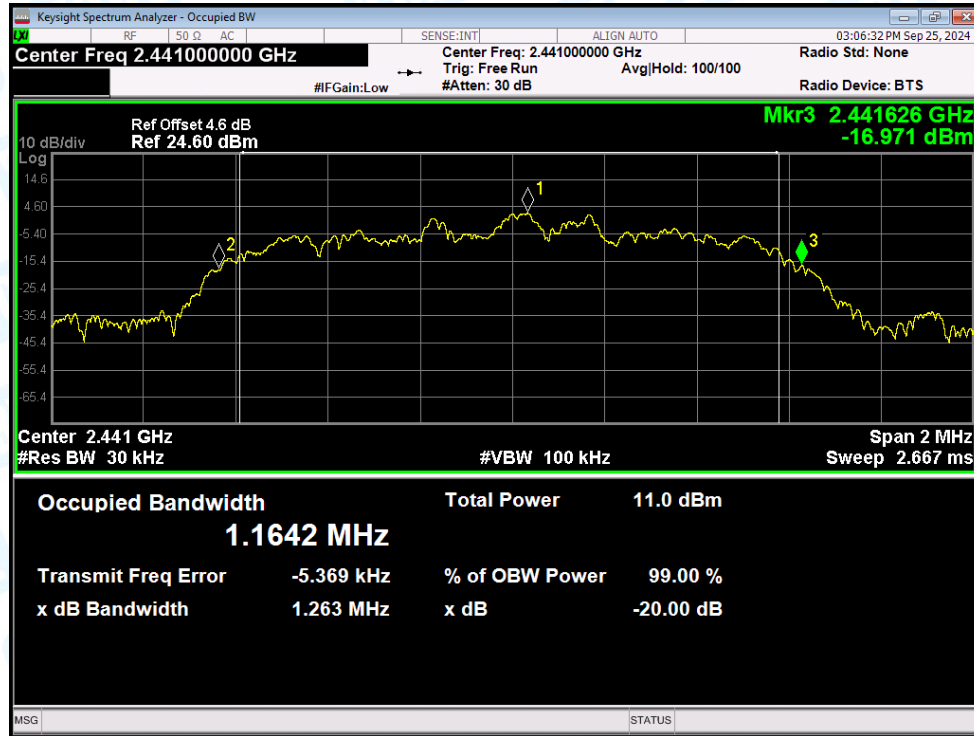


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

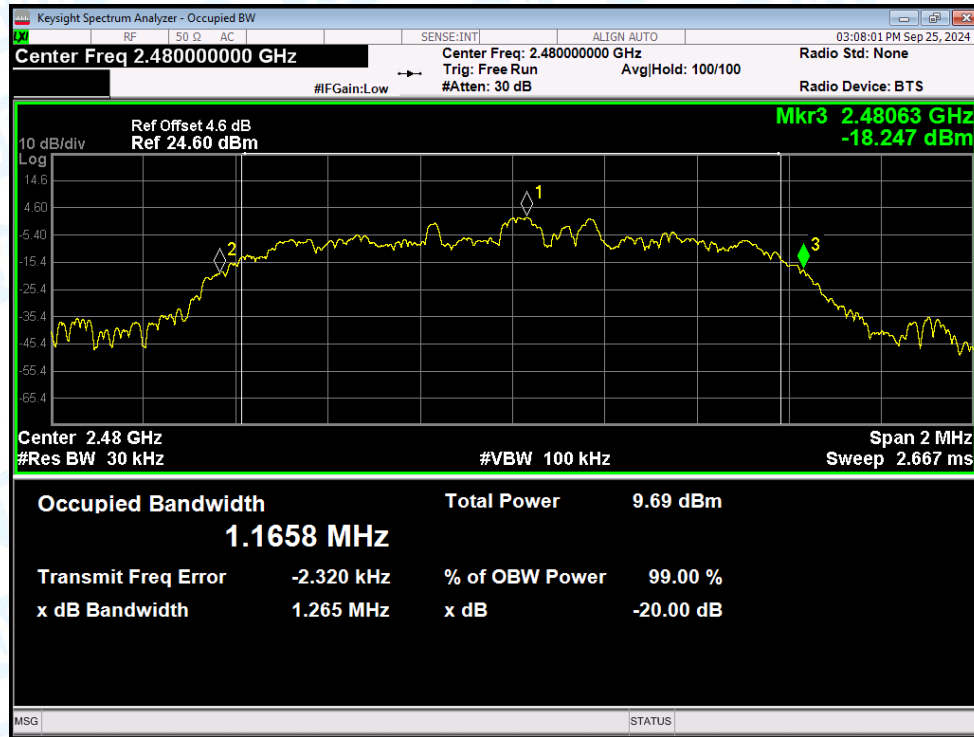


-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

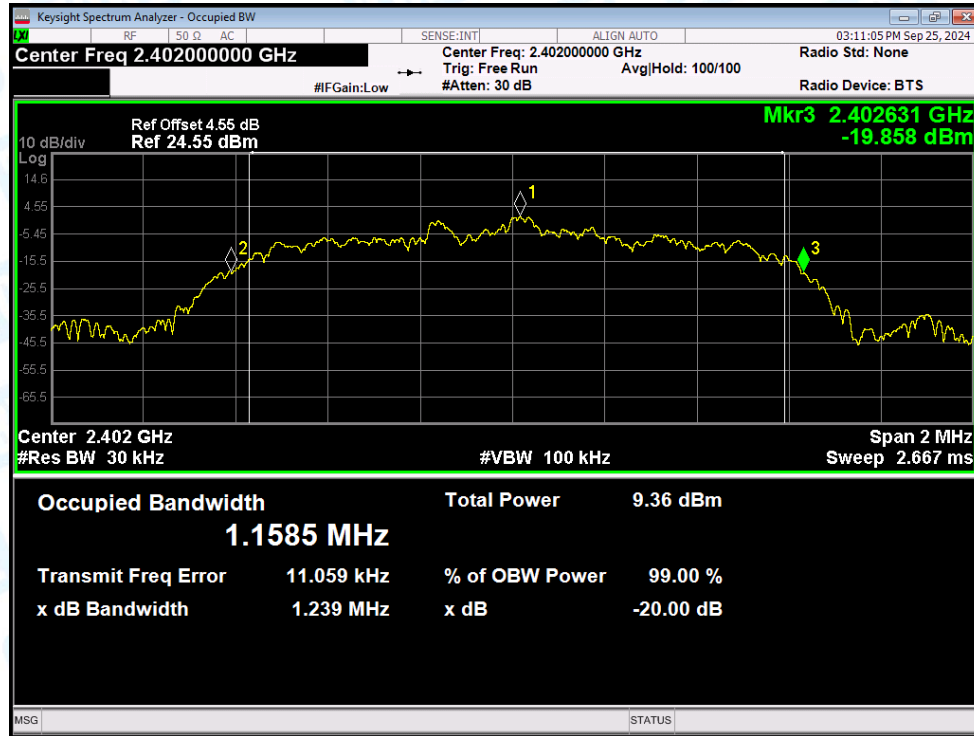

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

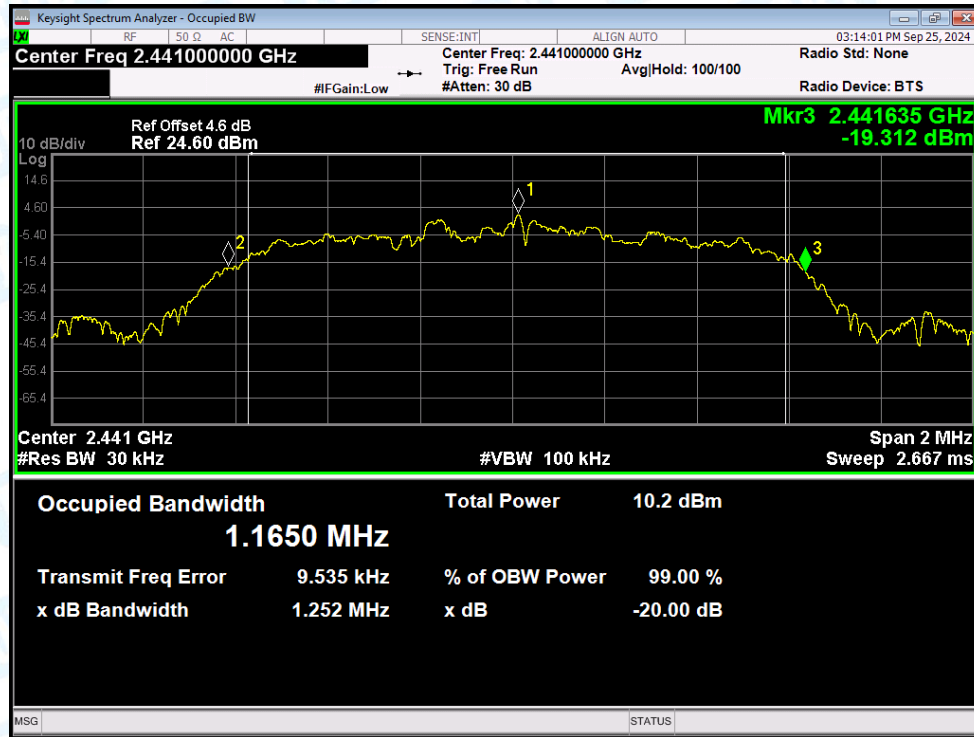

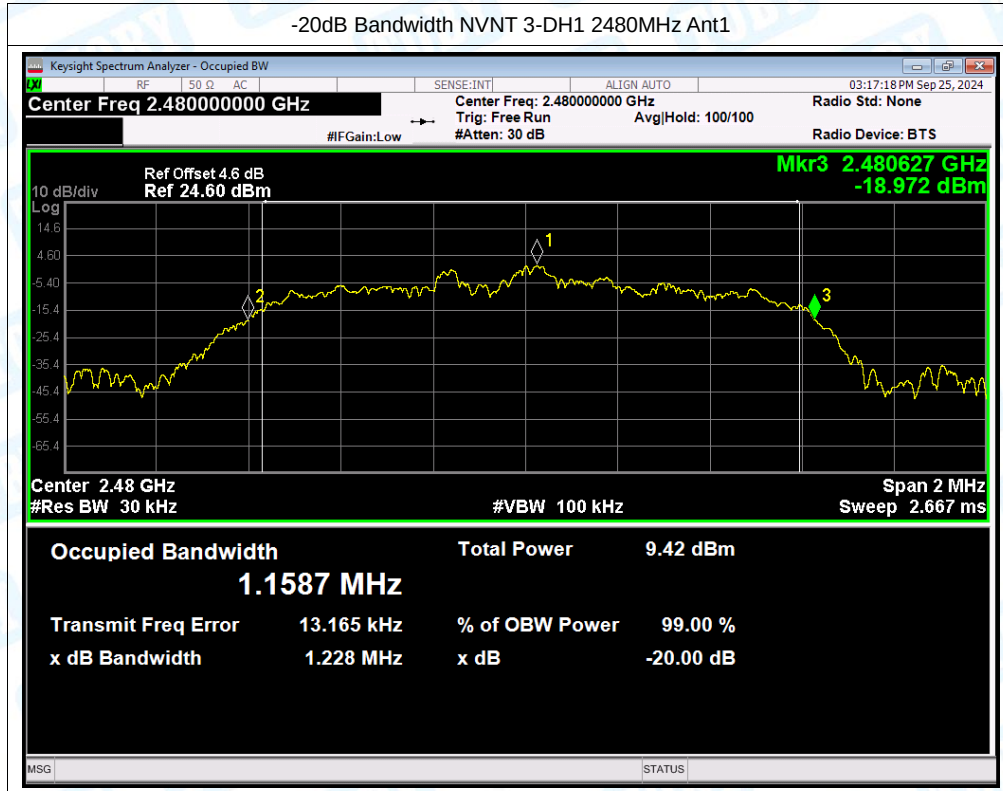


4. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	1-DH1	2402	0.841
NVNT	1-DH1	2441	0.846
NVNT	1-DH1	2480	0.839
NVNT	2-DH1	2402	1.172
NVNT	2-DH1	2441	1.178
NVNT	2-DH1	2480	1.169
NVNT	3-DH1	2402	1.157
NVNT	3-DH1	2441	1.167
NVNT	3-DH1	2480	1.167

Test Graphs


OBW NVNT 1-DH1 2402MHz Ant1

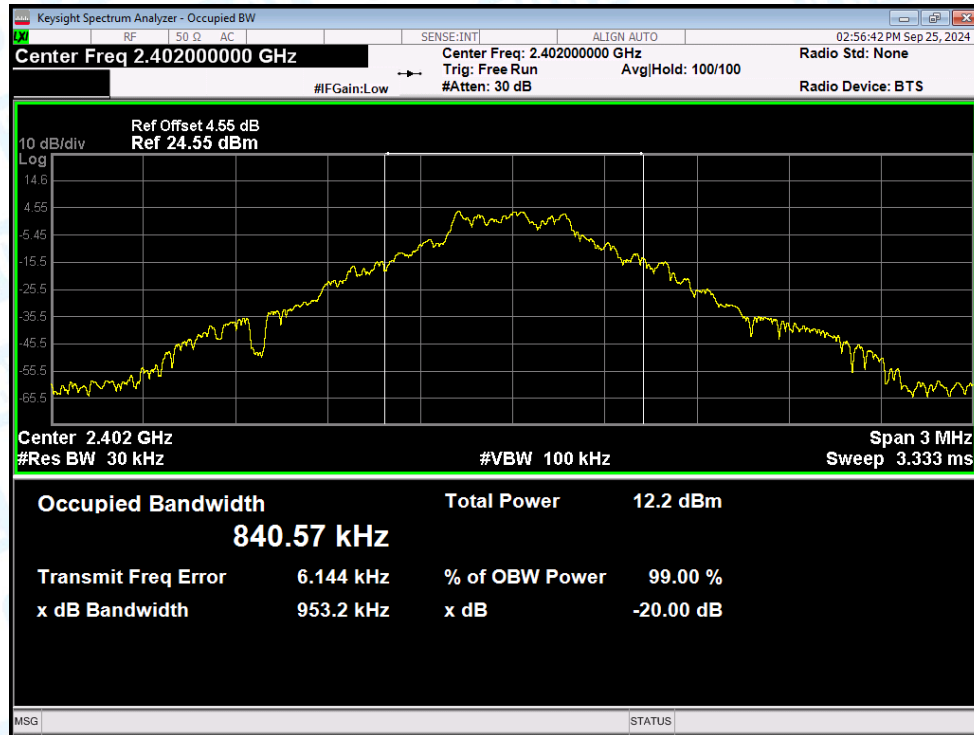


OBW NVNT 1-DH1 2441MHz Ant1

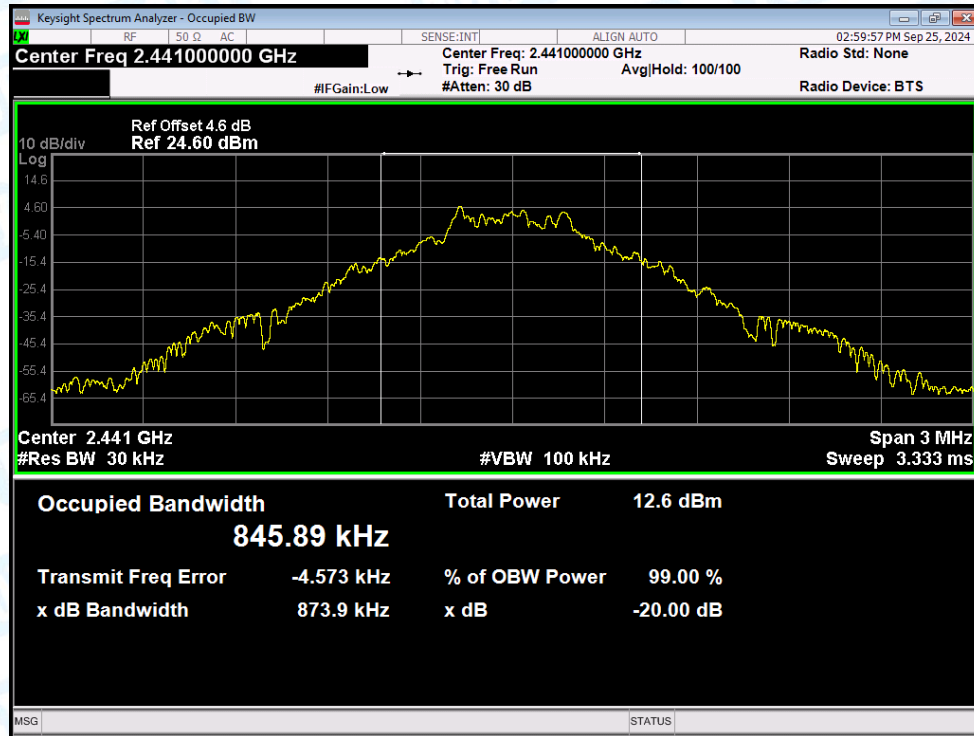


OBW NVNT 1-DH1 2480MHz Ant1

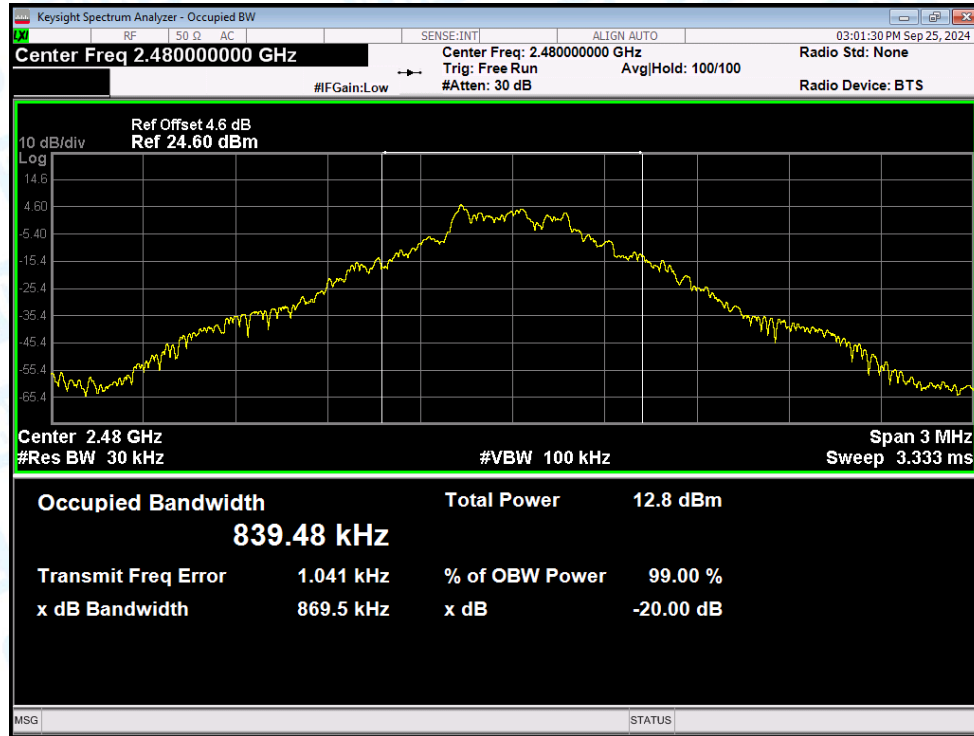


OBW NVNT 2-DH1 2402MHz Ant1

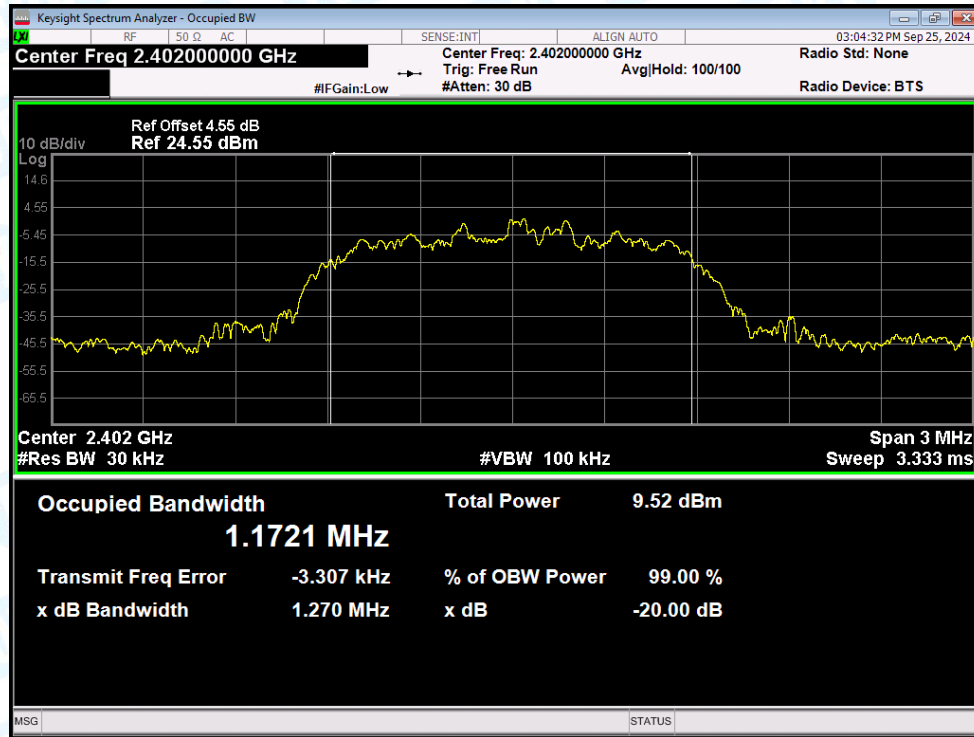


OBW NVNT 2-DH1 2441MHz Ant1

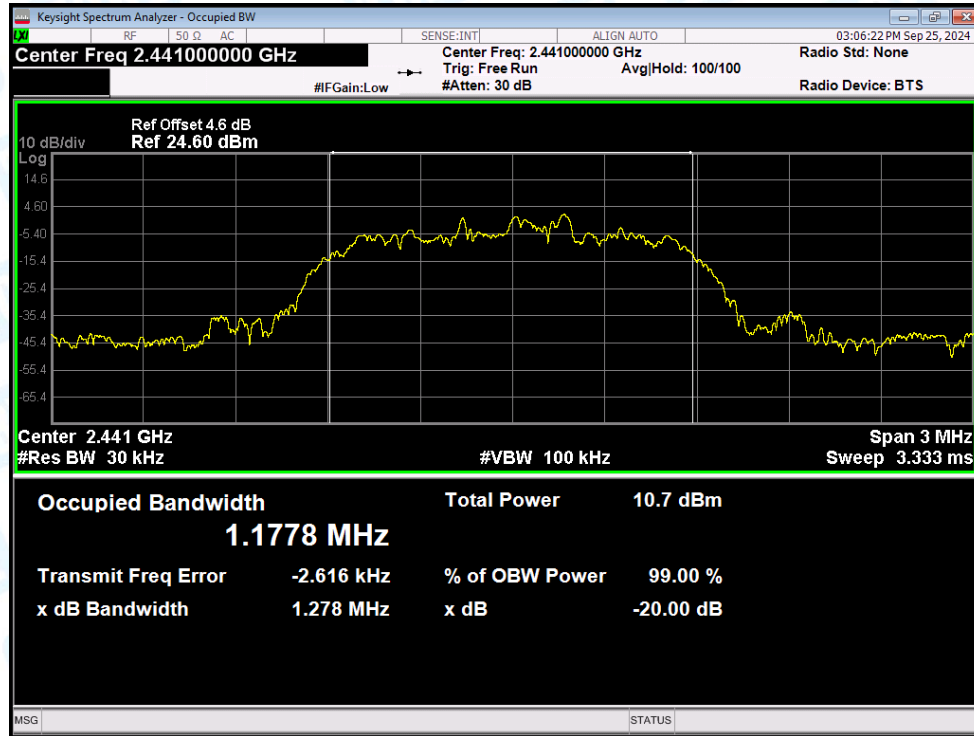


OBW NVNT 2-DH1 2480MHz Ant1

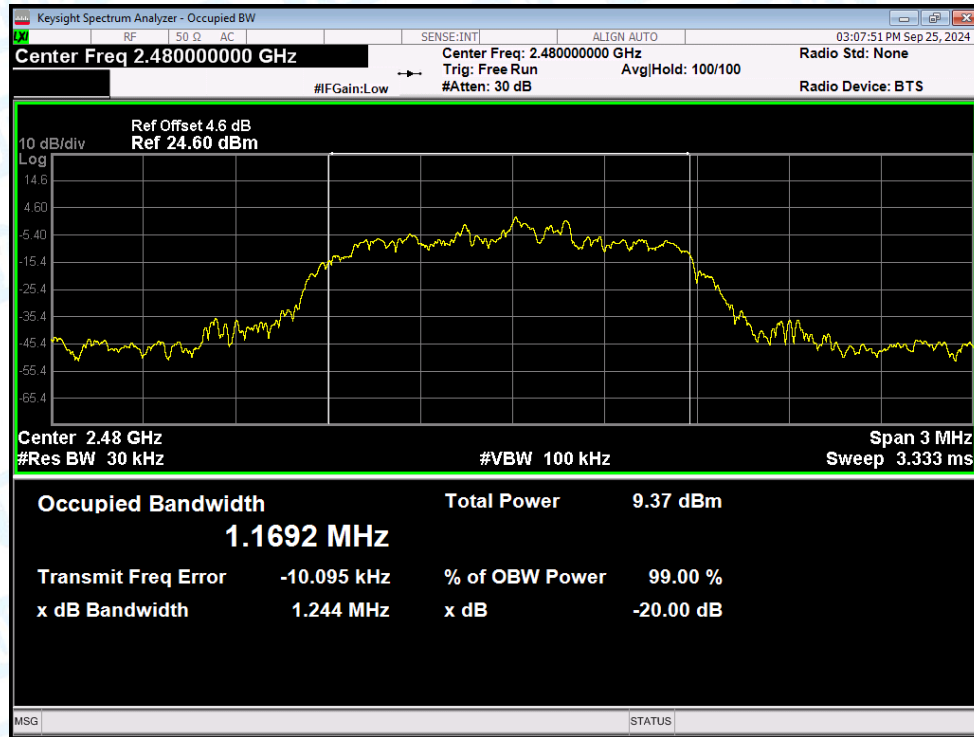


OBW NVNT 3-DH1 2402MHz Ant1

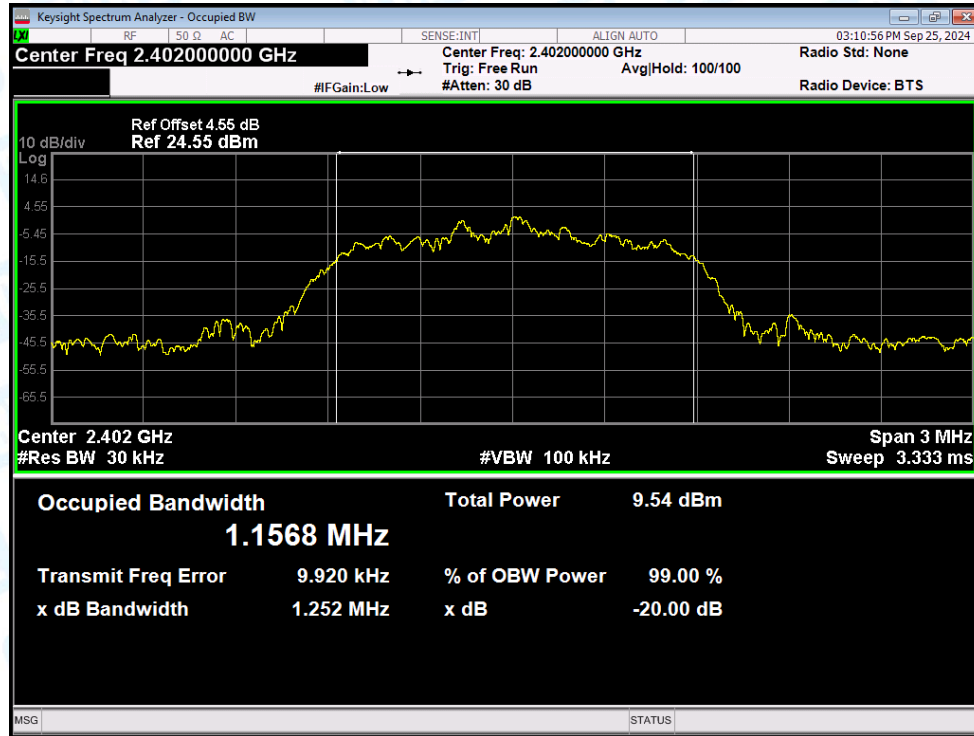

OBW NVNT 3-DH1 2441MHz Ant1

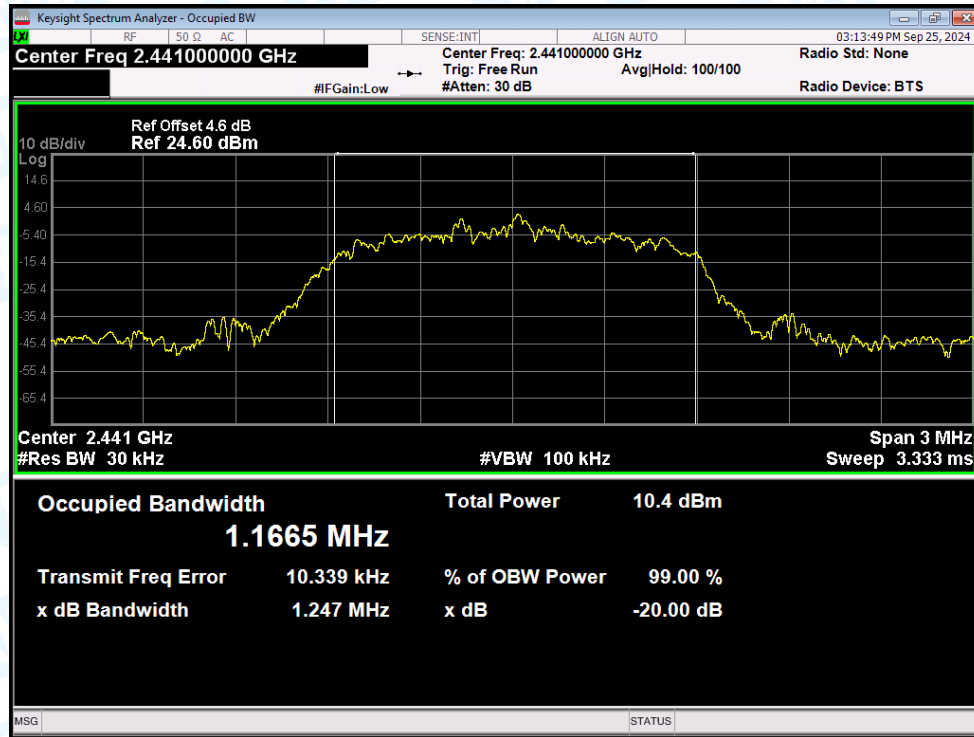

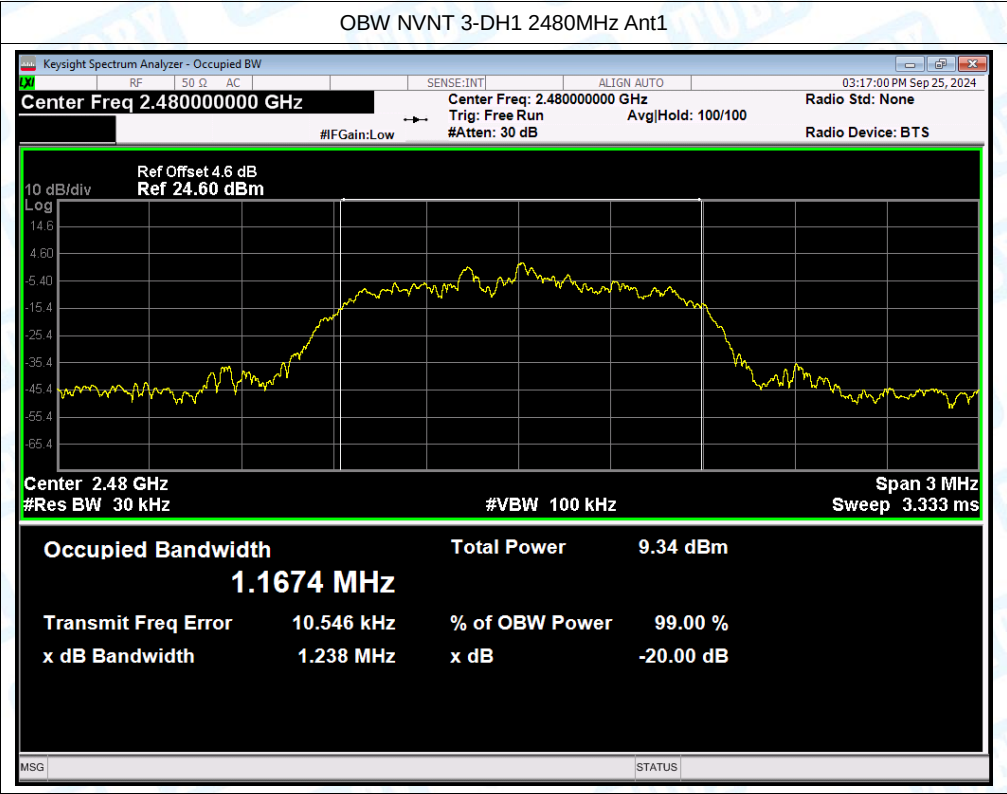


5. Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-60.21	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-60.15	-20	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	-57.79	-20	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	-58.01	-20	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	-57.18	-20	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	-56.54	-20	Pass

Test Graphs


Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref

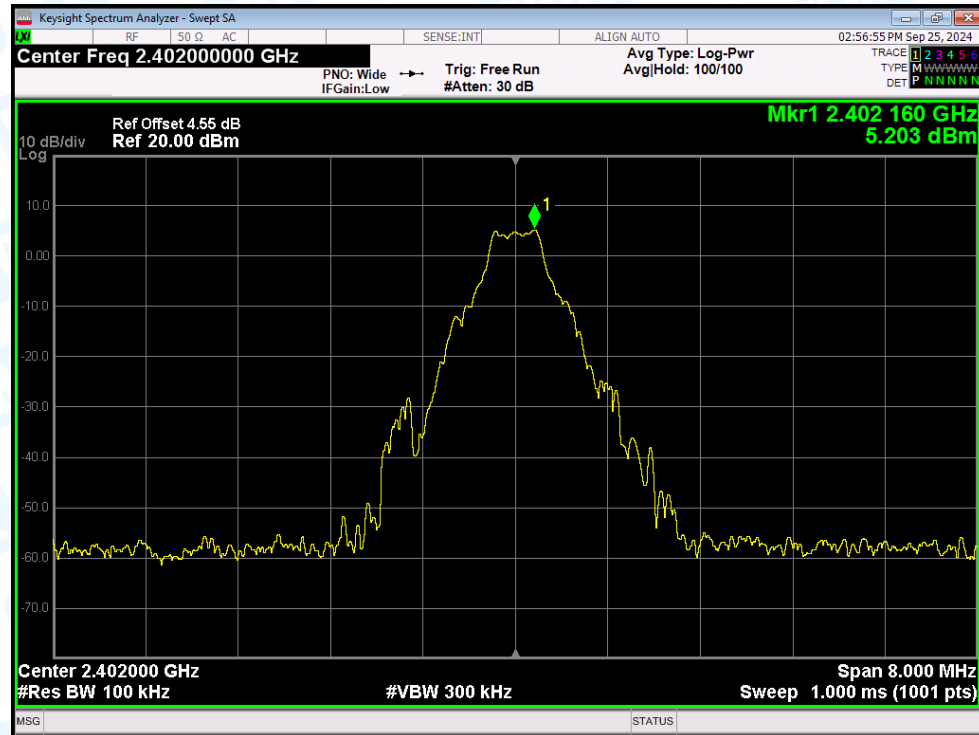


Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

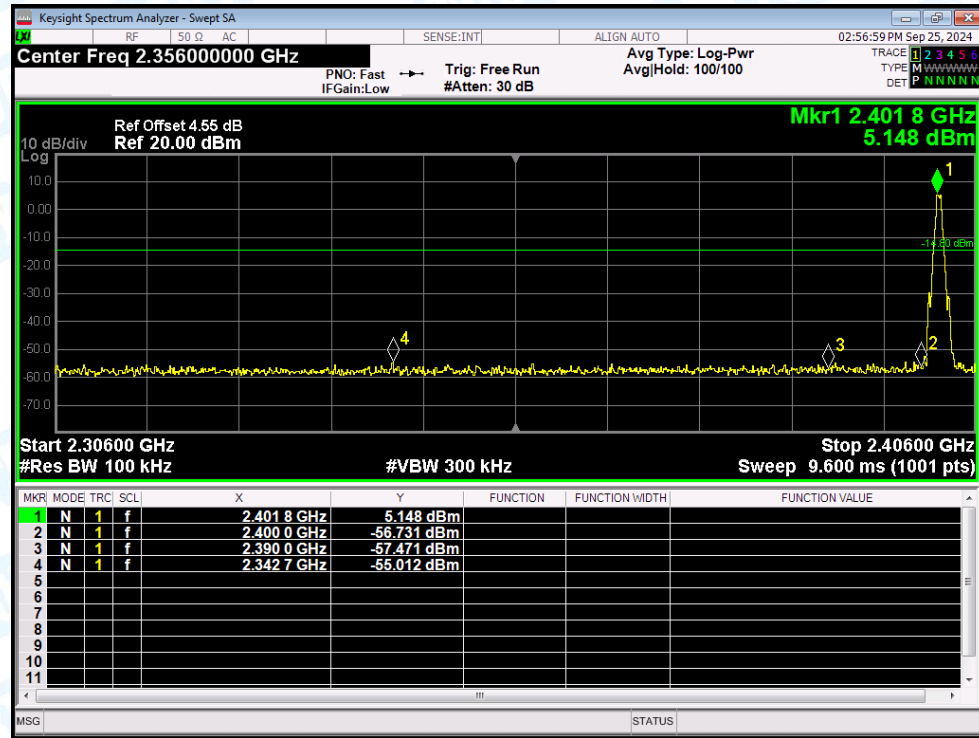


Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref

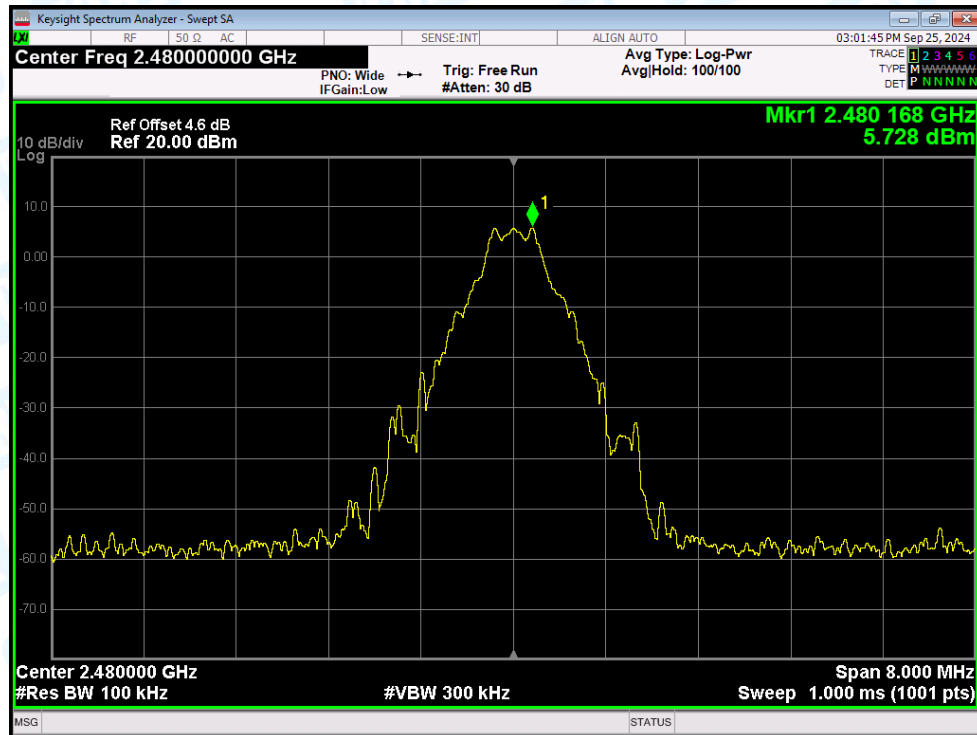


Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

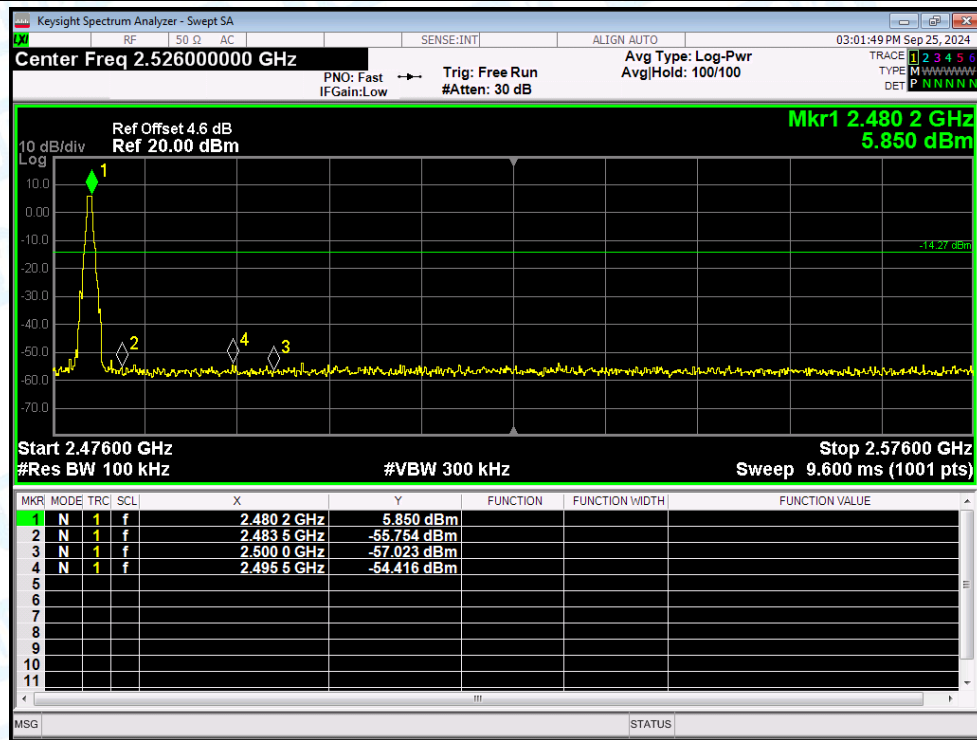


Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref

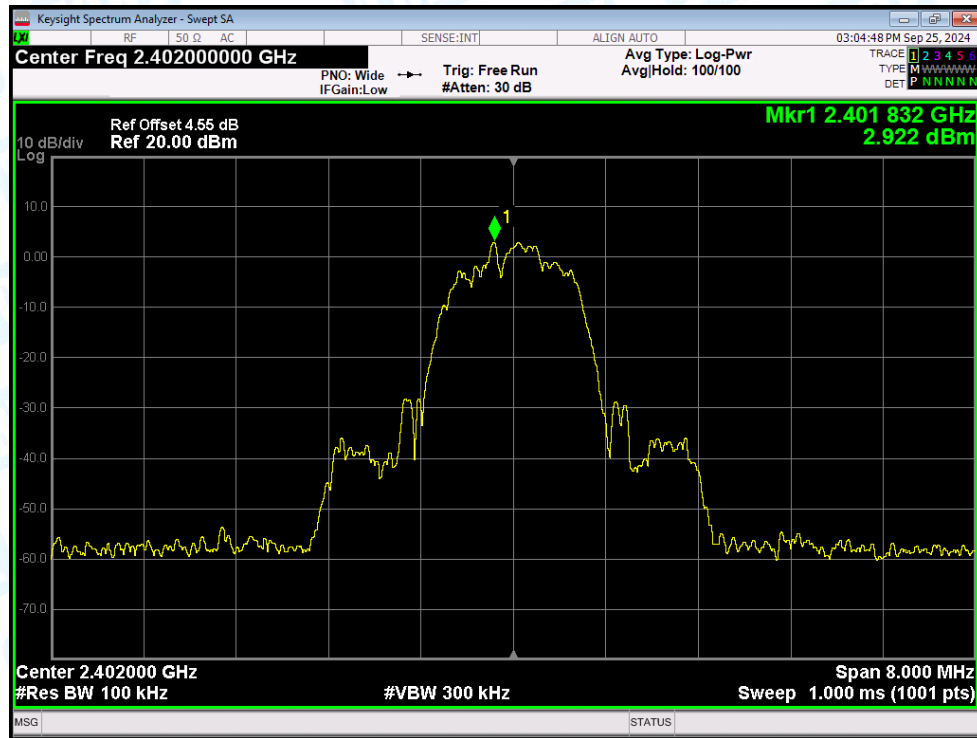


Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission


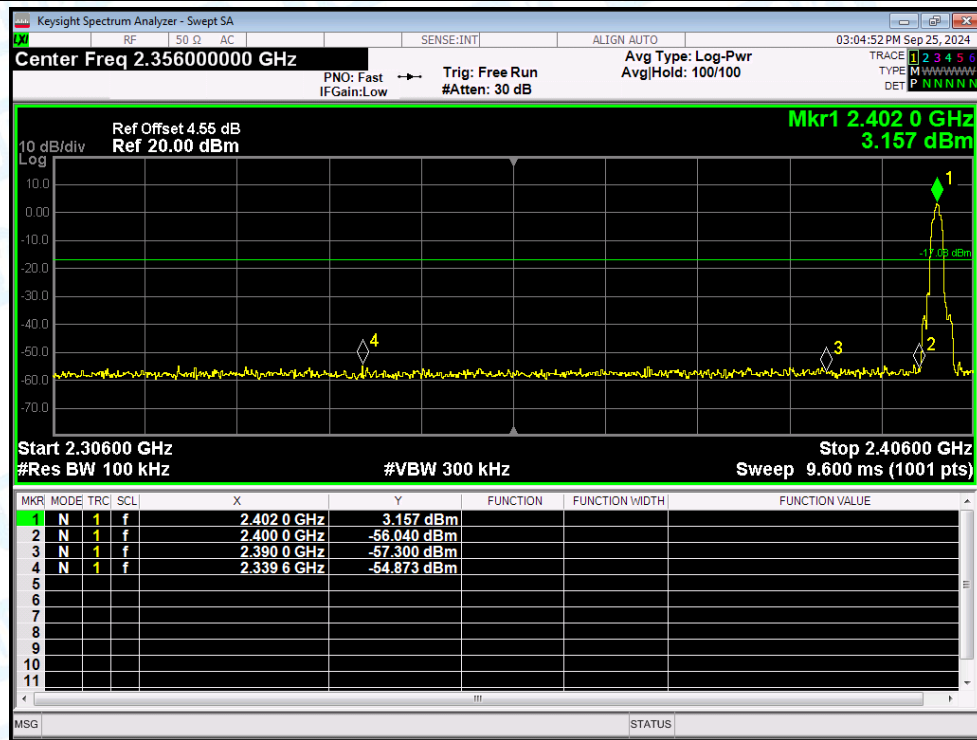


Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref

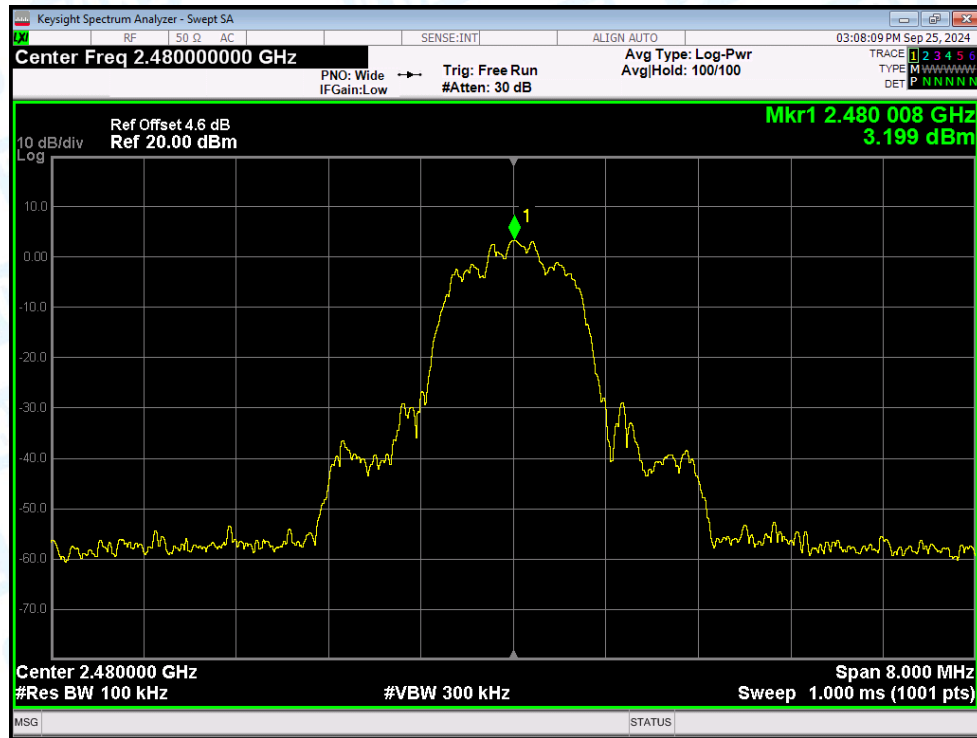


Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission

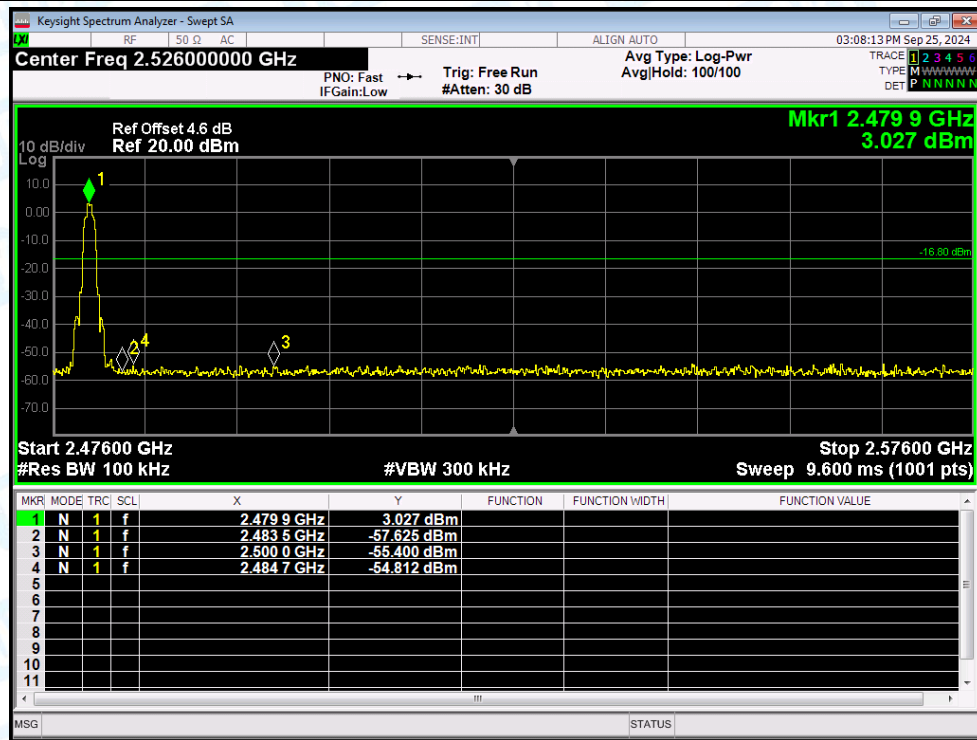


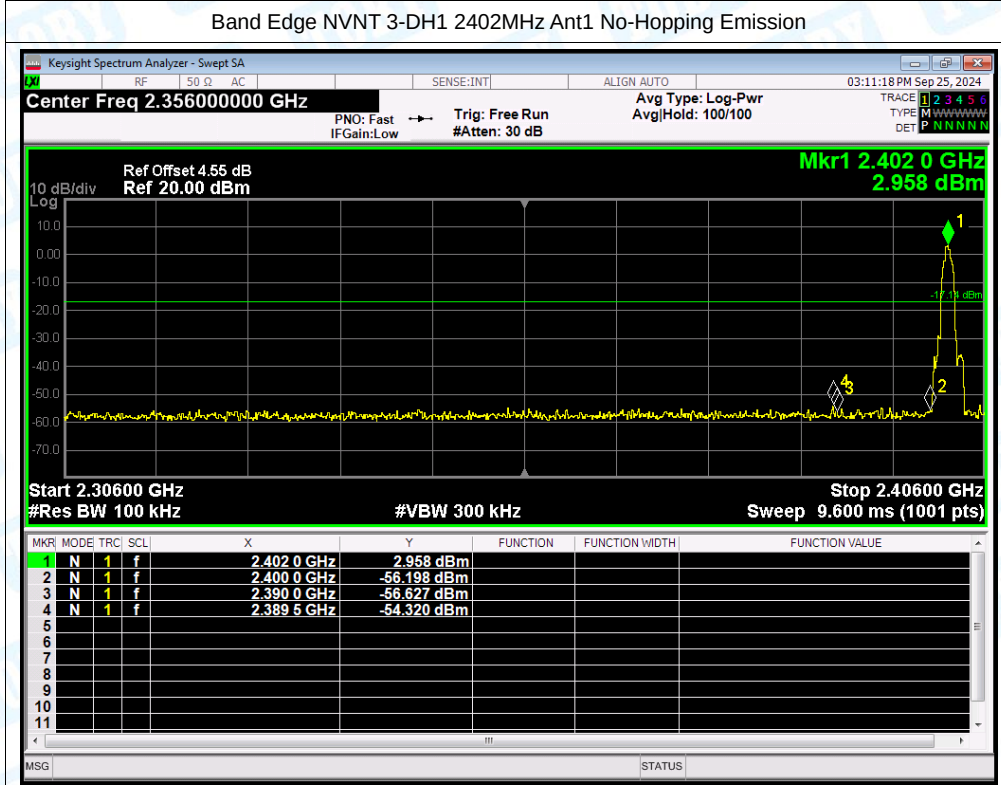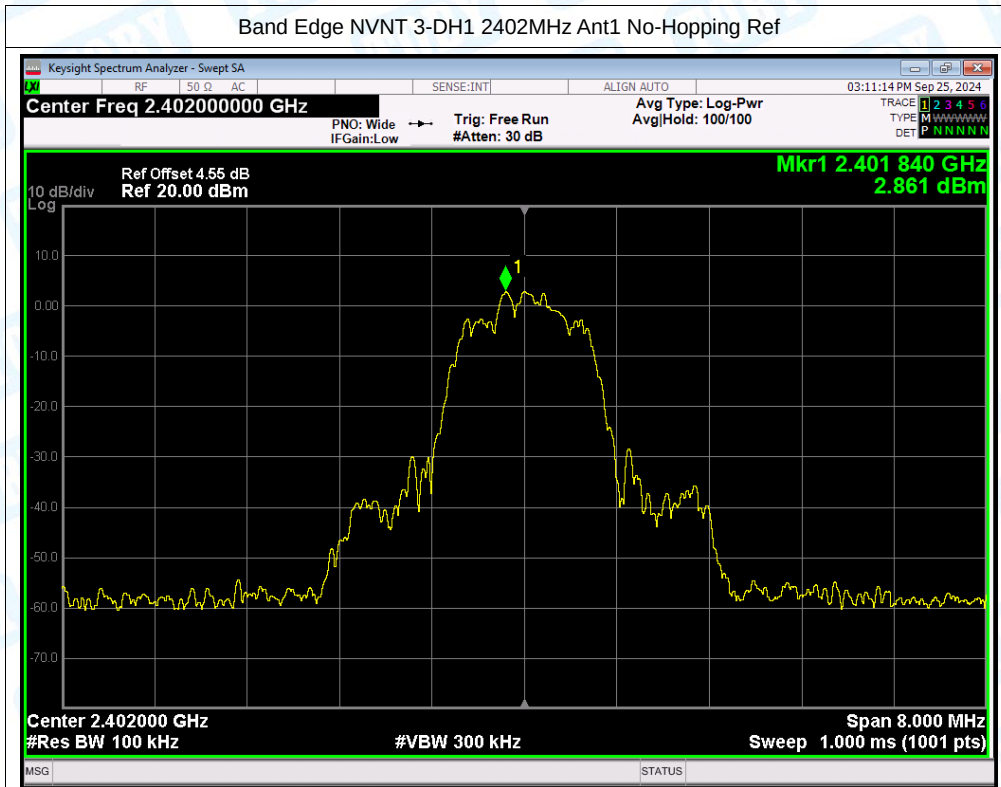

Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Ref

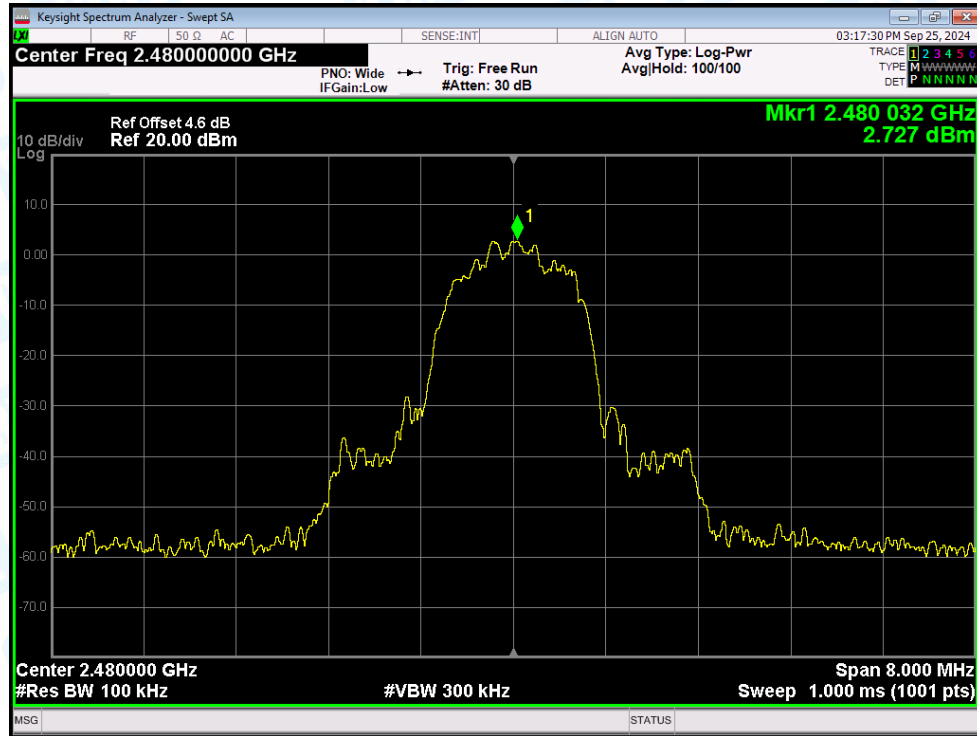

Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Emission

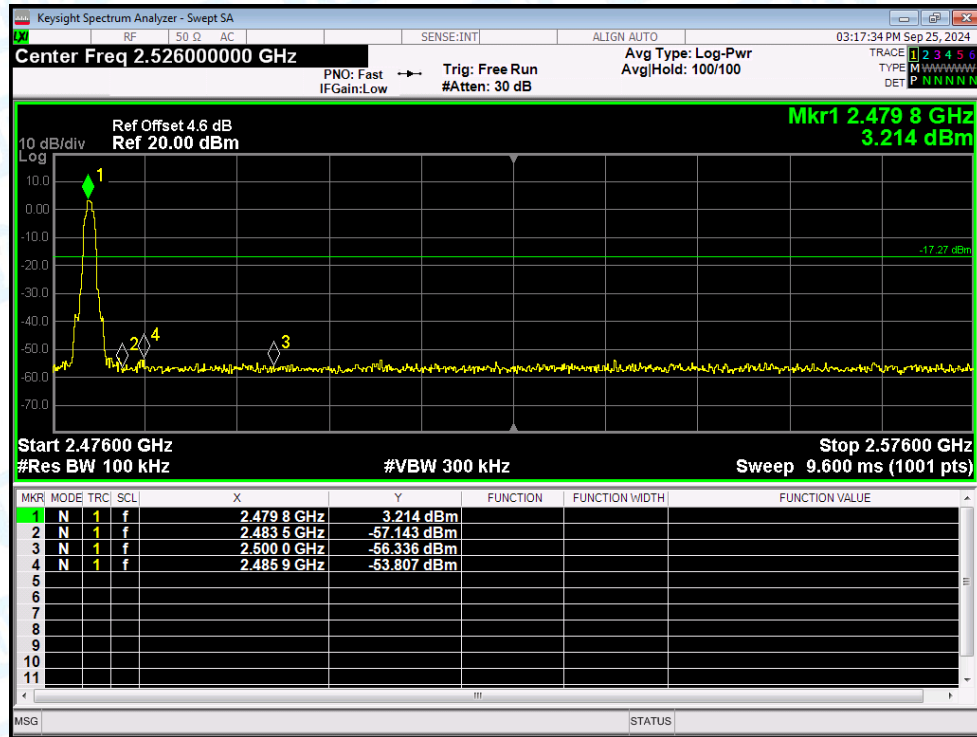


6. Band Edge(Hopping)


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	Hopping	-59.16	-20	Pass
NVNT	1-DH1	2480	Ant1	Hopping	-59.66	-20	Pass
NVNT	2-DH1	2402	Ant1	Hopping	-56.78	-20	Pass
NVNT	2-DH1	2480	Ant1	Hopping	-55.6	-20	Pass
NVNT	3-DH1	2402	Ant1	Hopping	-57.44	-20	Pass
NVNT	3-DH1	2480	Ant1	Hopping	-56.29	-20	Pass

Test Graphs

Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Ref

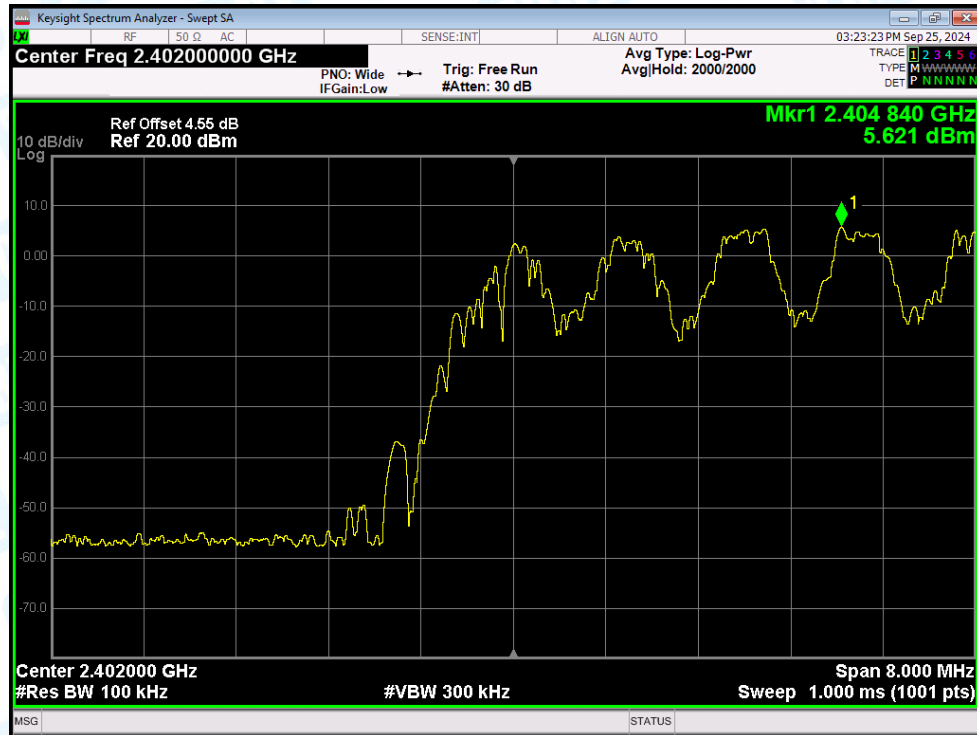


Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Emission

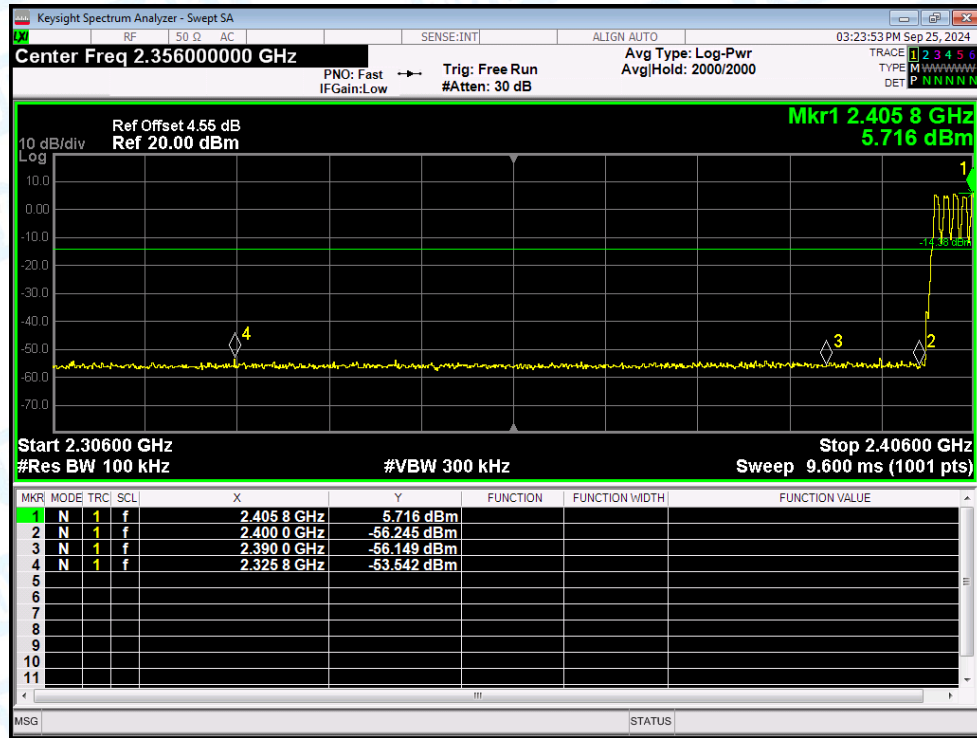


Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Emission

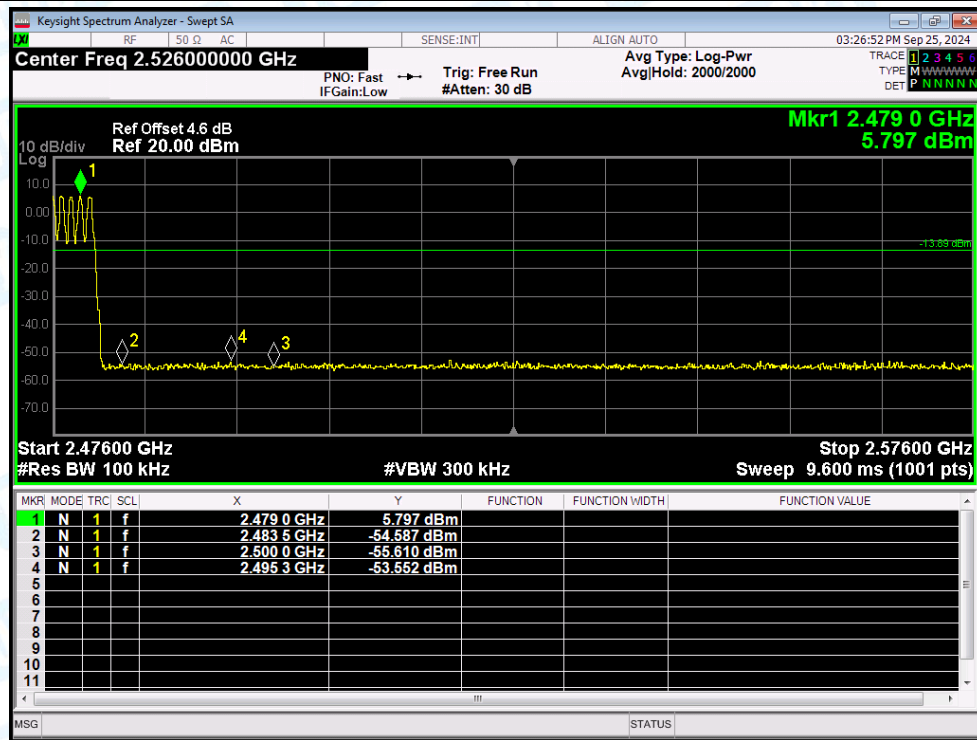

Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Ref

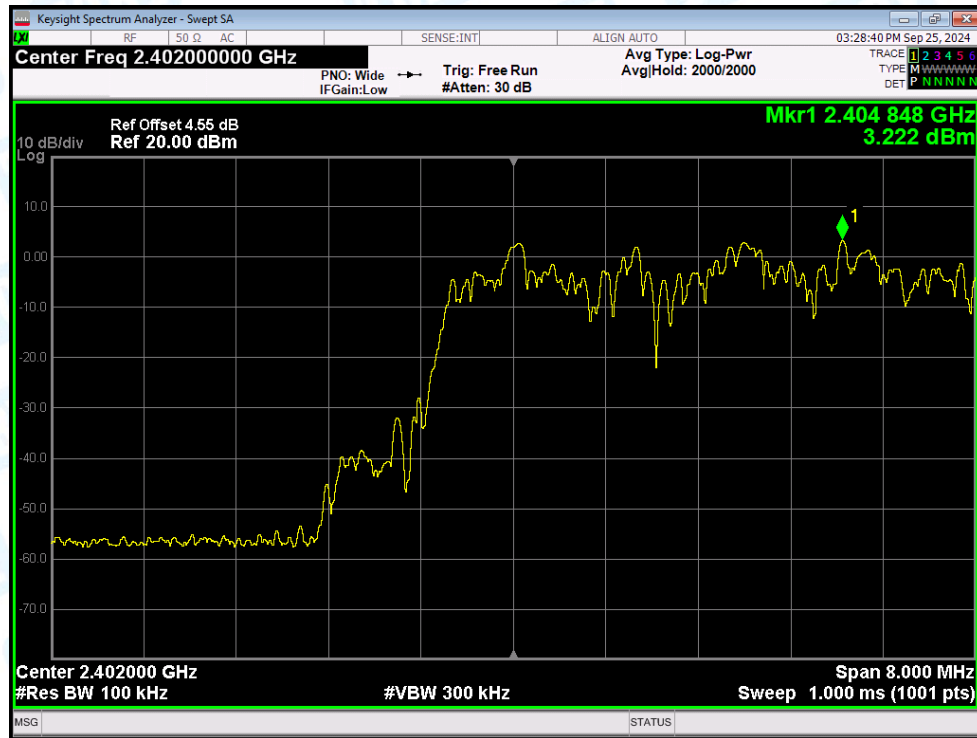


Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Emission

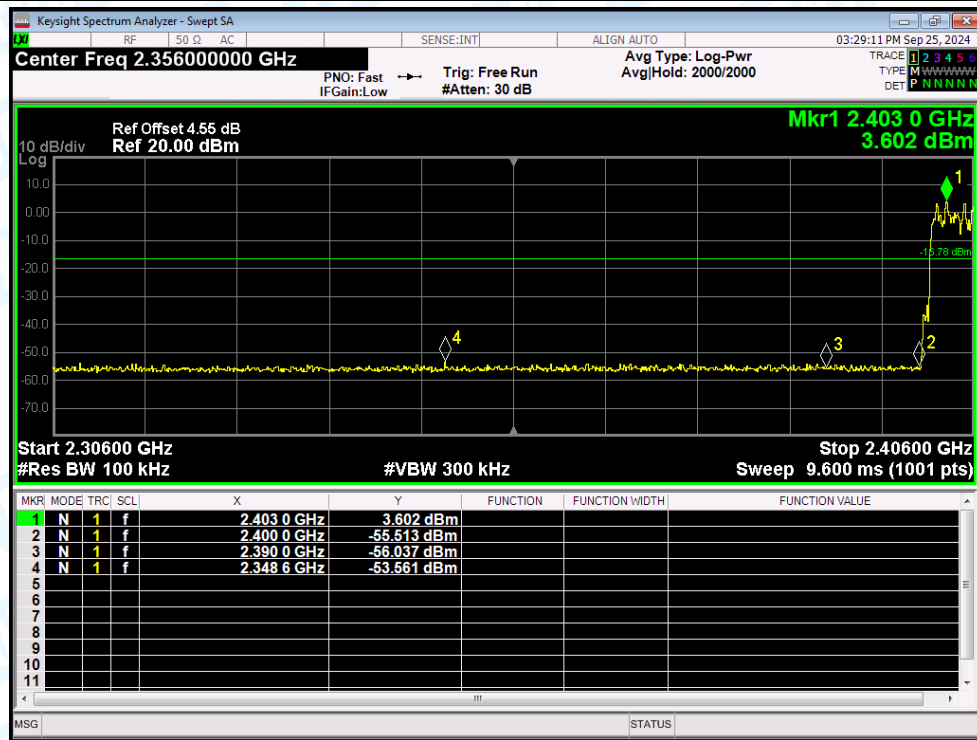


Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Emission

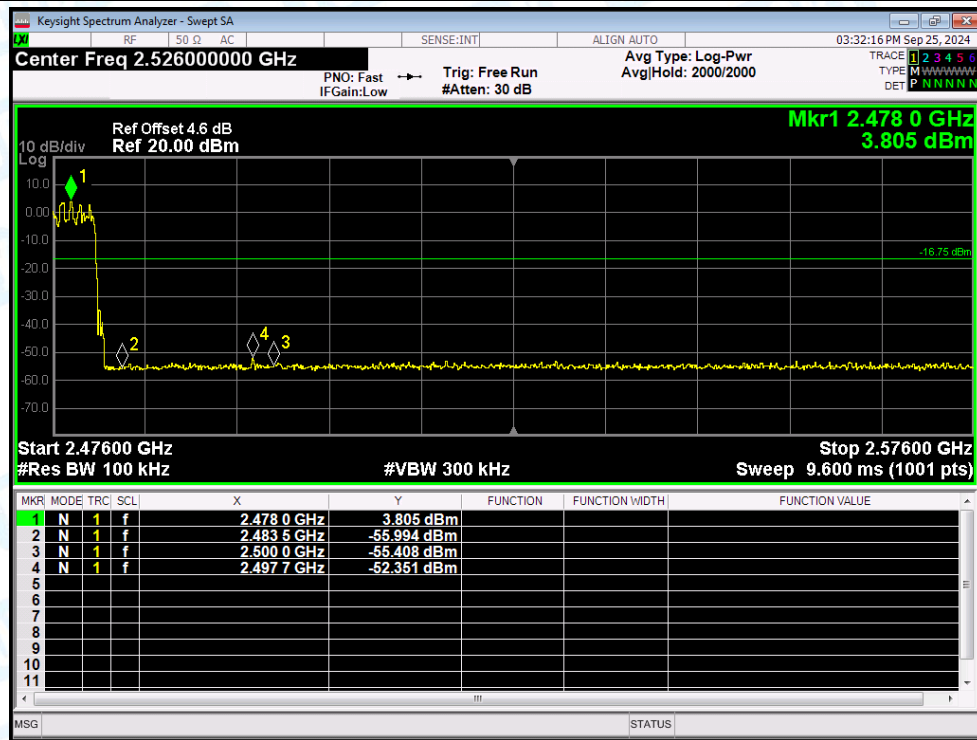


Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Ref

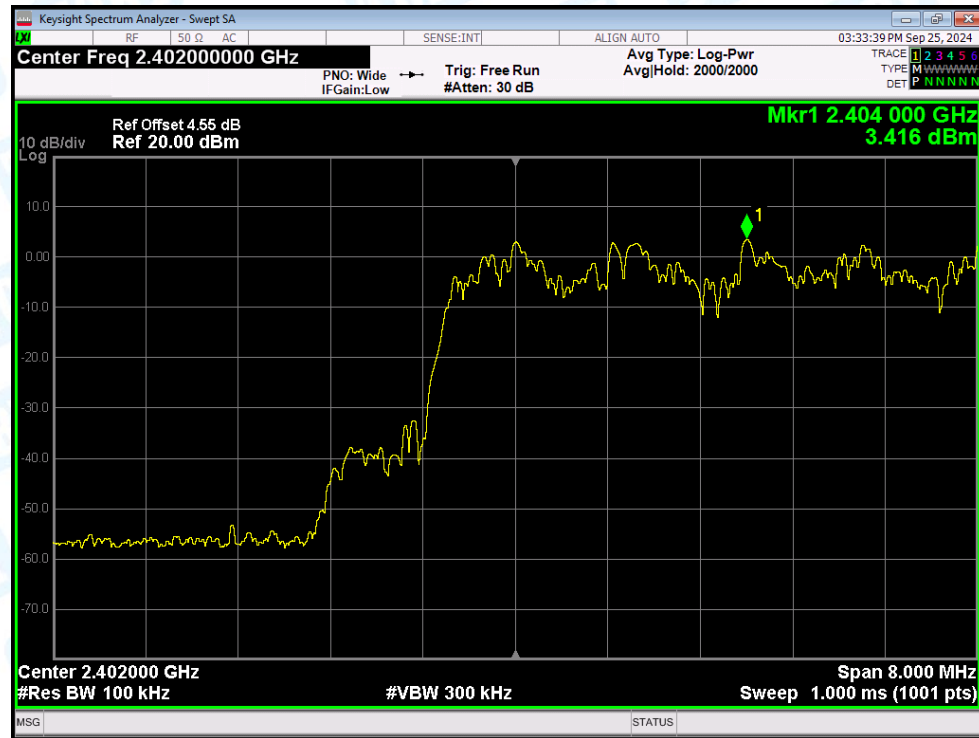

Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Emission

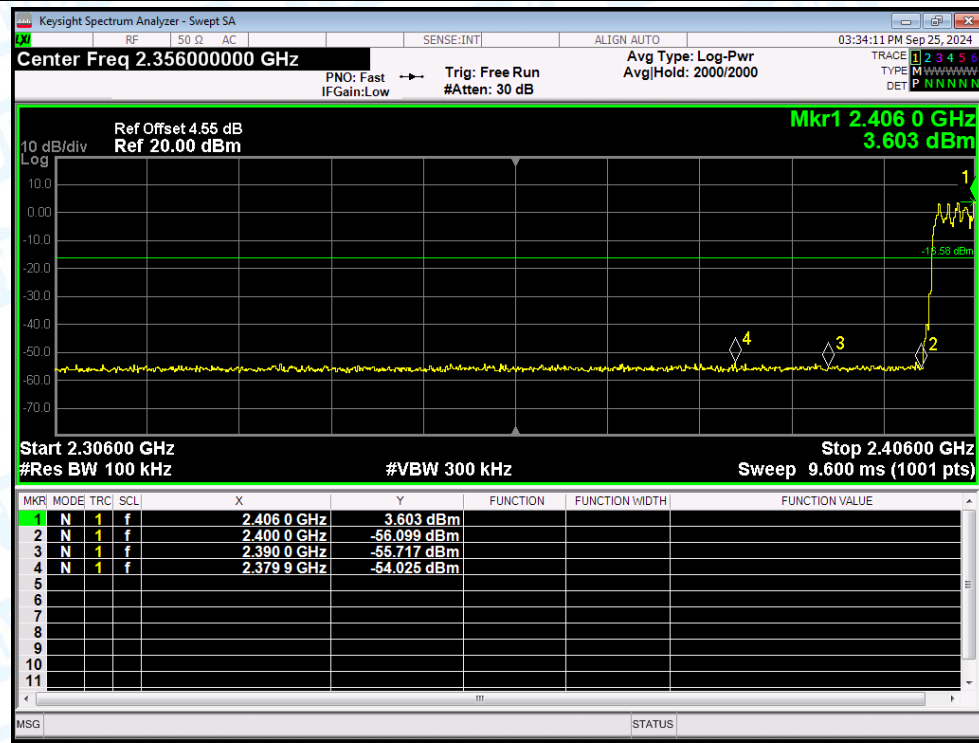

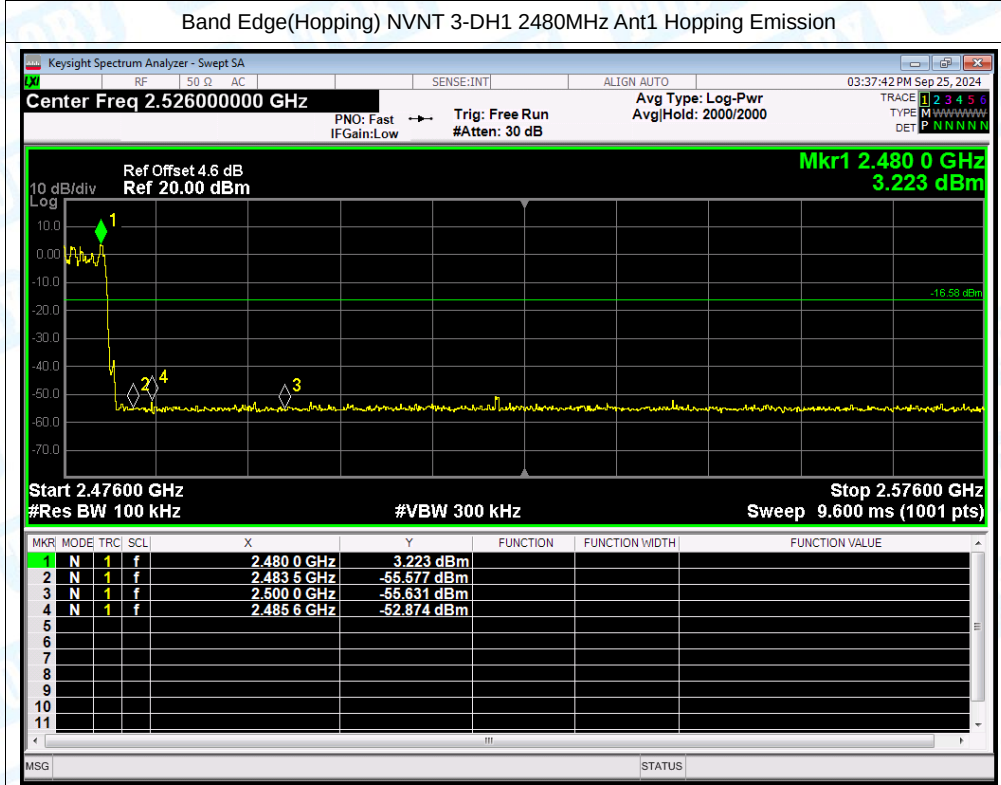


7. Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	-56.26	-20	Pass
NVNT	1-DH1	2441	Ant1	-56.86	-20	Pass
NVNT	1-DH1	2480	Ant1	-52.96	-20	Pass
NVNT	2-DH1	2402	Ant1	-54.5	-20	Pass
NVNT	2-DH1	2441	Ant1	-55.31	-20	Pass
NVNT	2-DH1	2480	Ant1	-53.83	-20	Pass
NVNT	3-DH1	2402	Ant1	-54.1	-20	Pass
NVNT	3-DH1	2441	Ant1	-55.19	-20	Pass
NVNT	3-DH1	2480	Ant1	-54.48	-20	Pass

Test Graphs


Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Ref

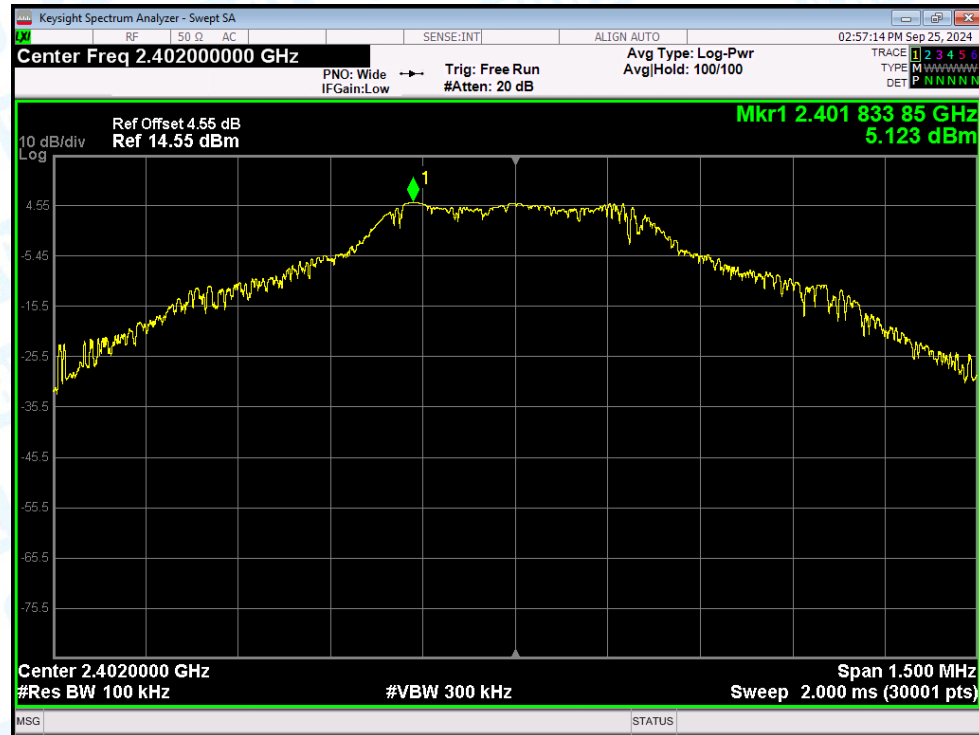


Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission

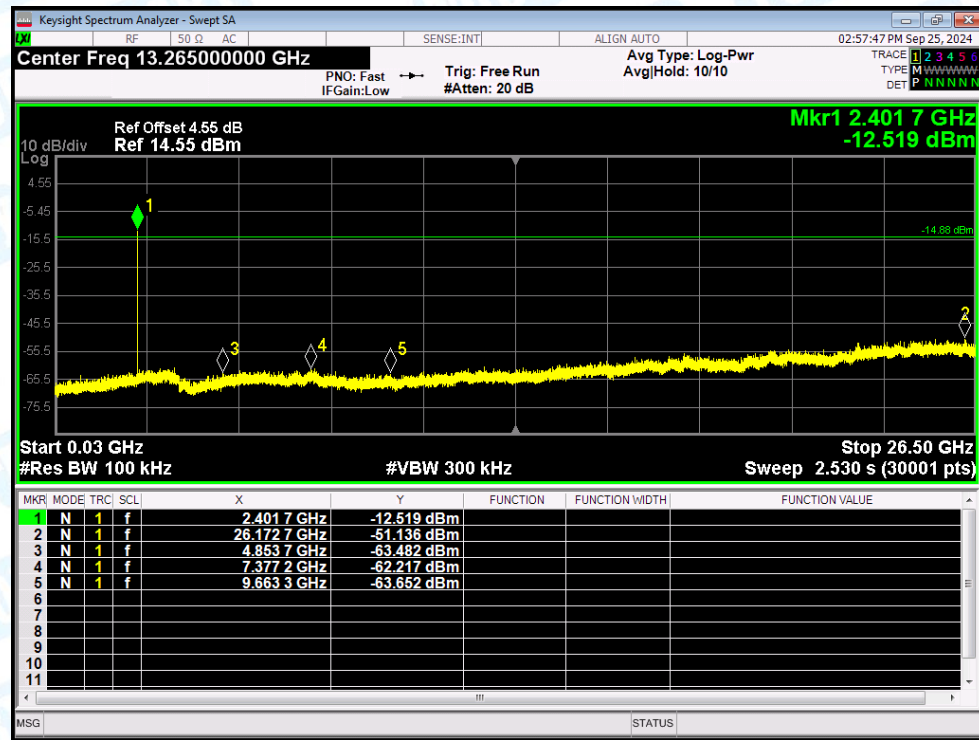


Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Ref

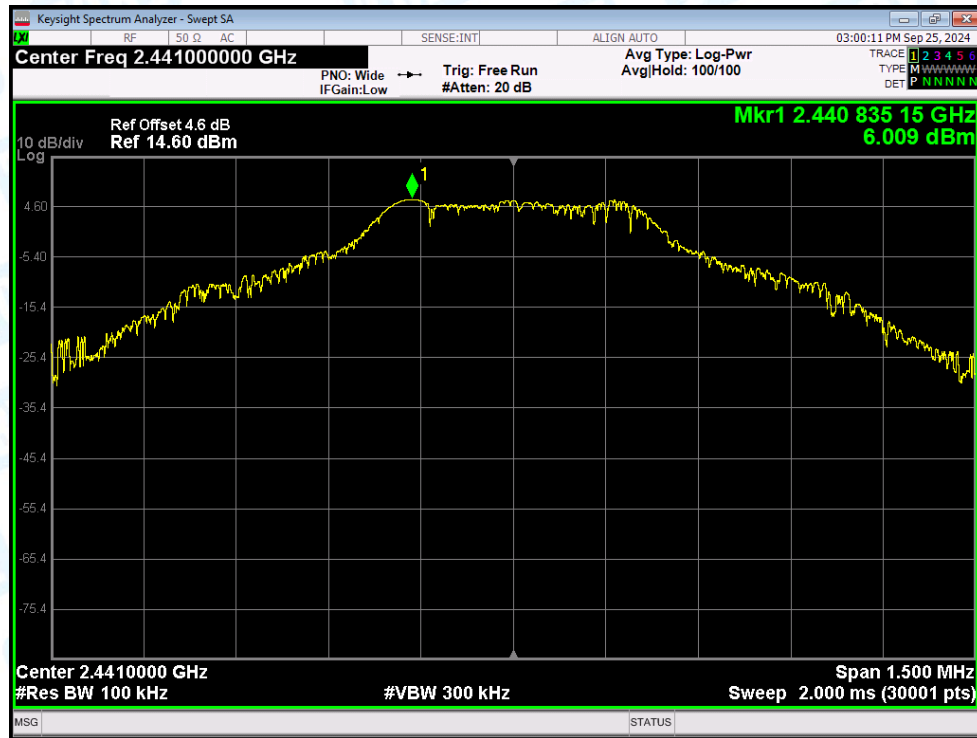


Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission

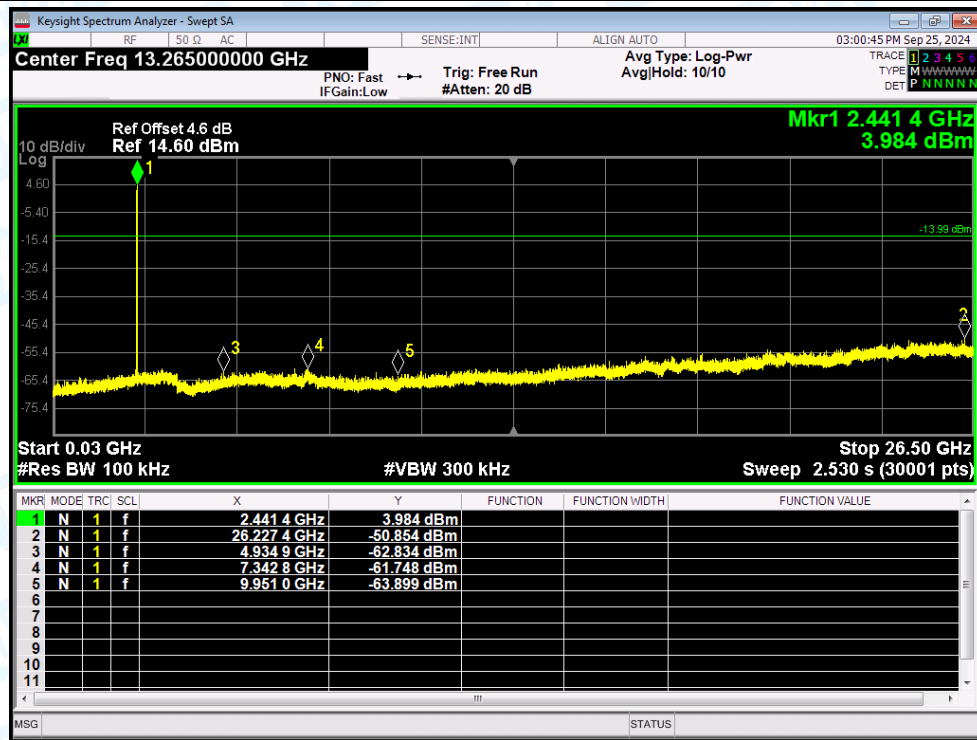


Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Ref

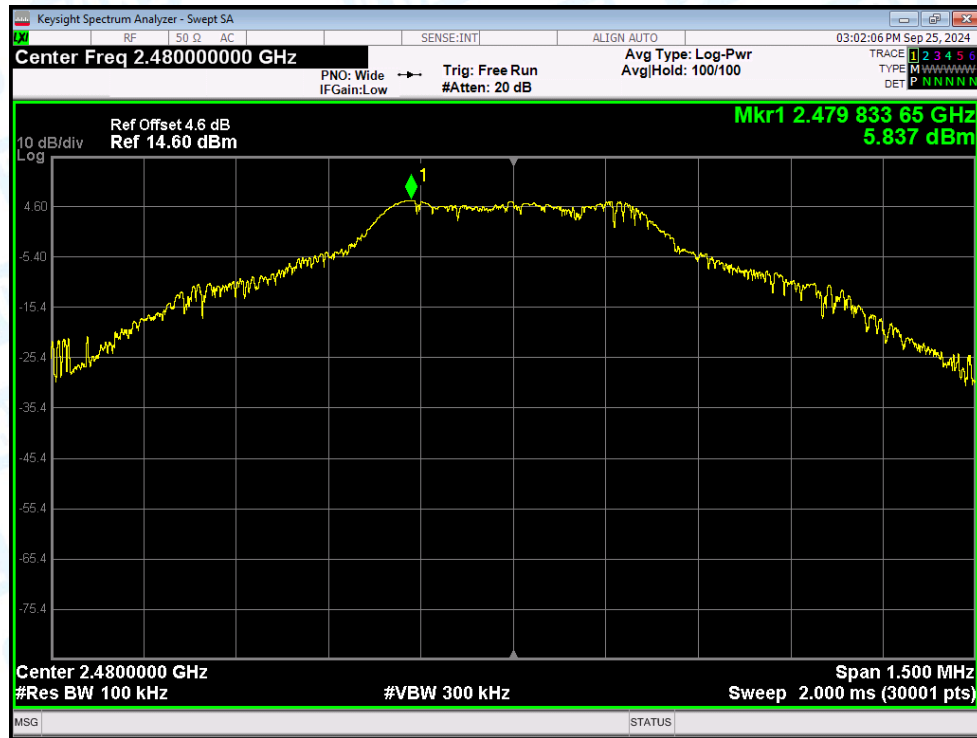


Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission

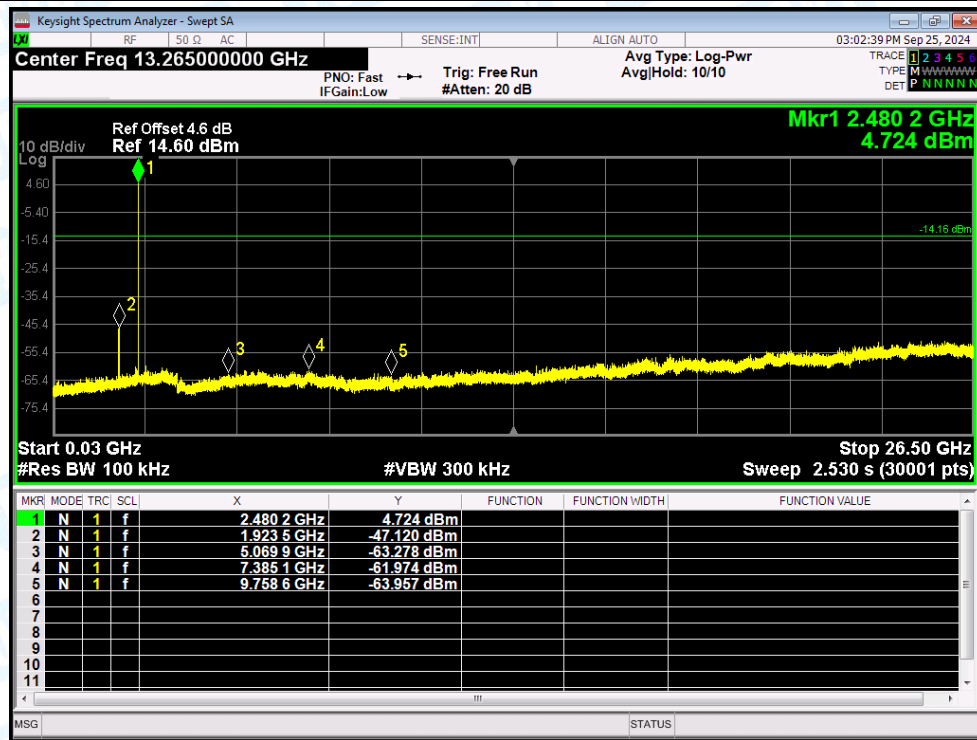


Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Ref

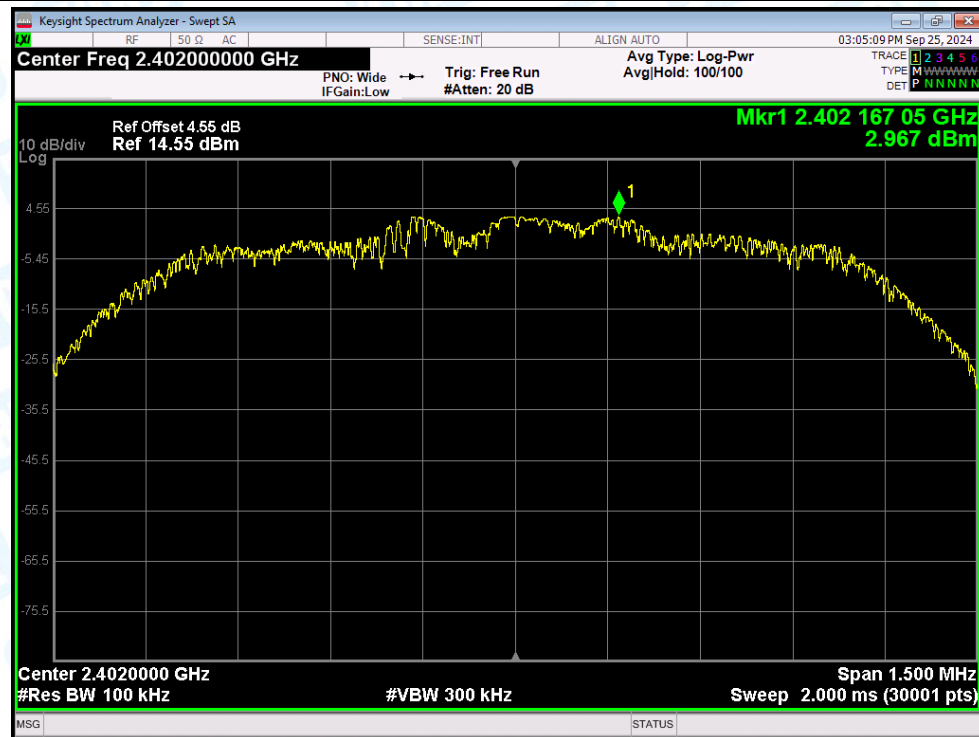


Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Emission

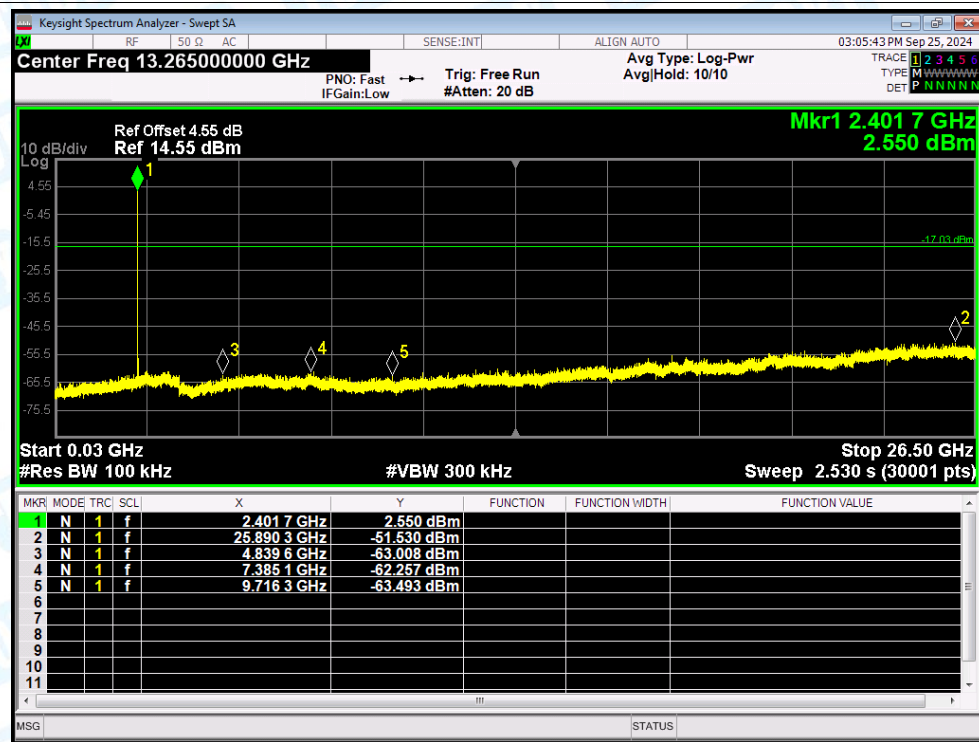


Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Ref

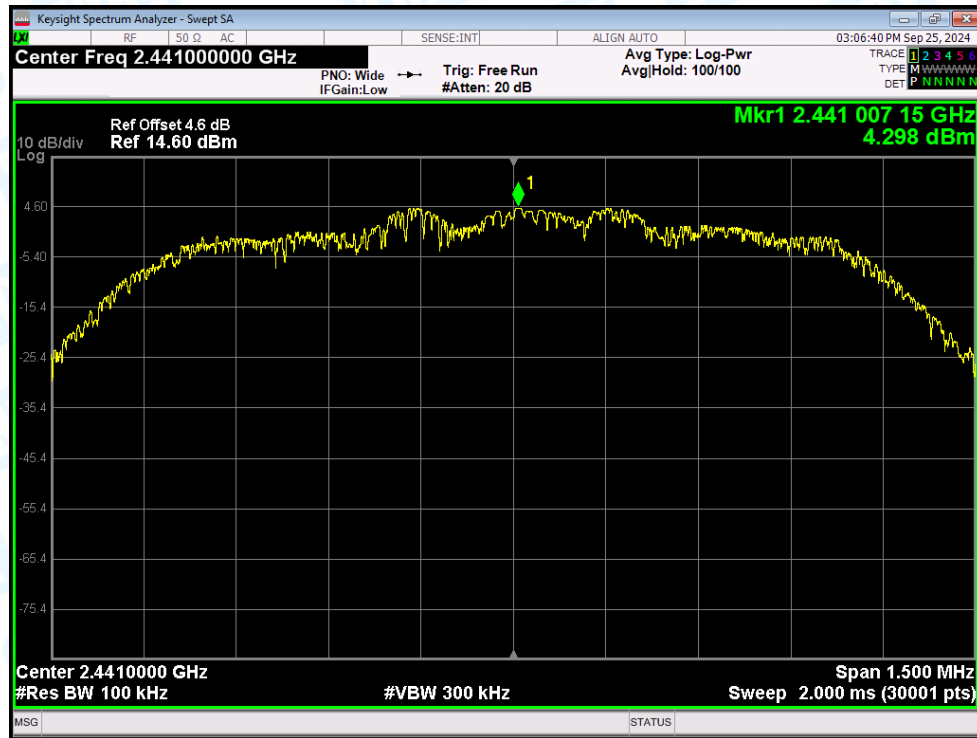


Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Emission

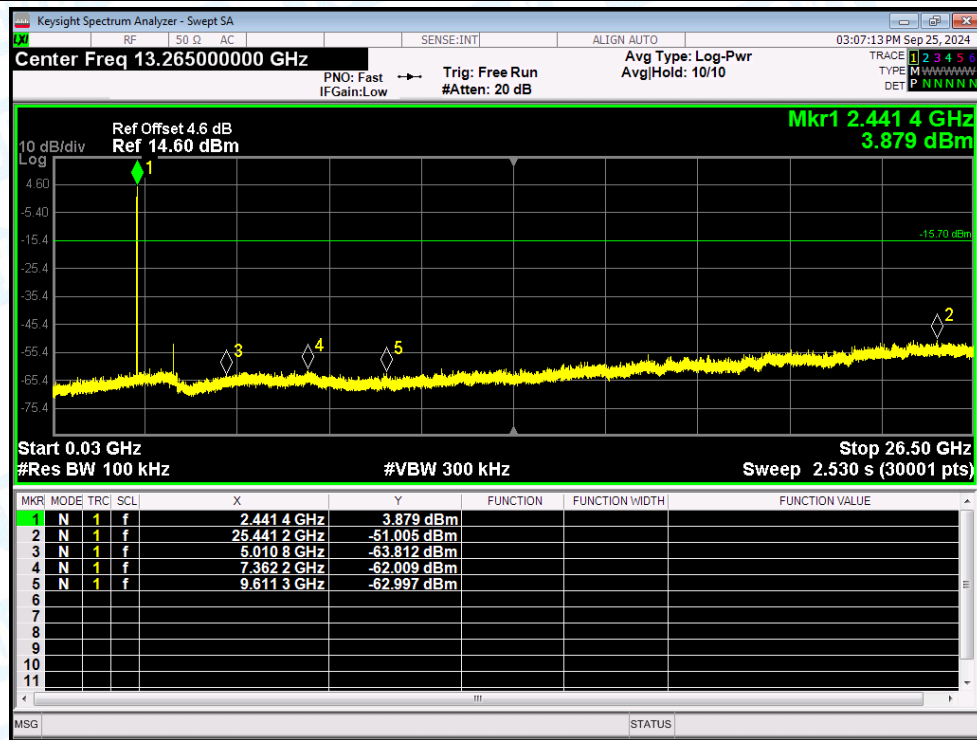


Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Ref

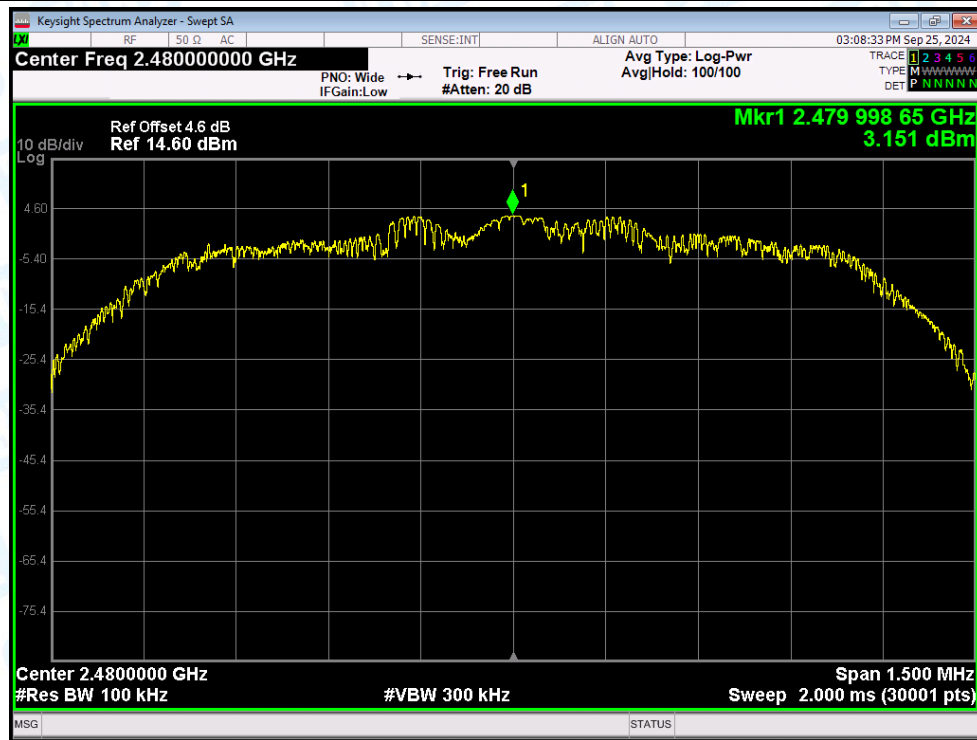


Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Emission

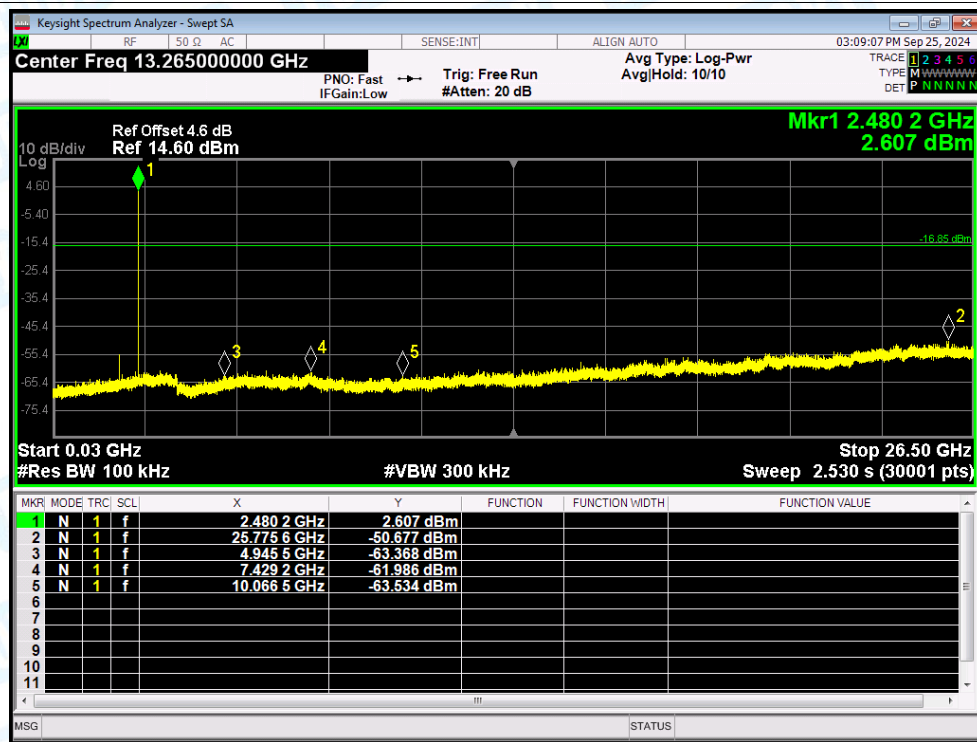


Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Ref

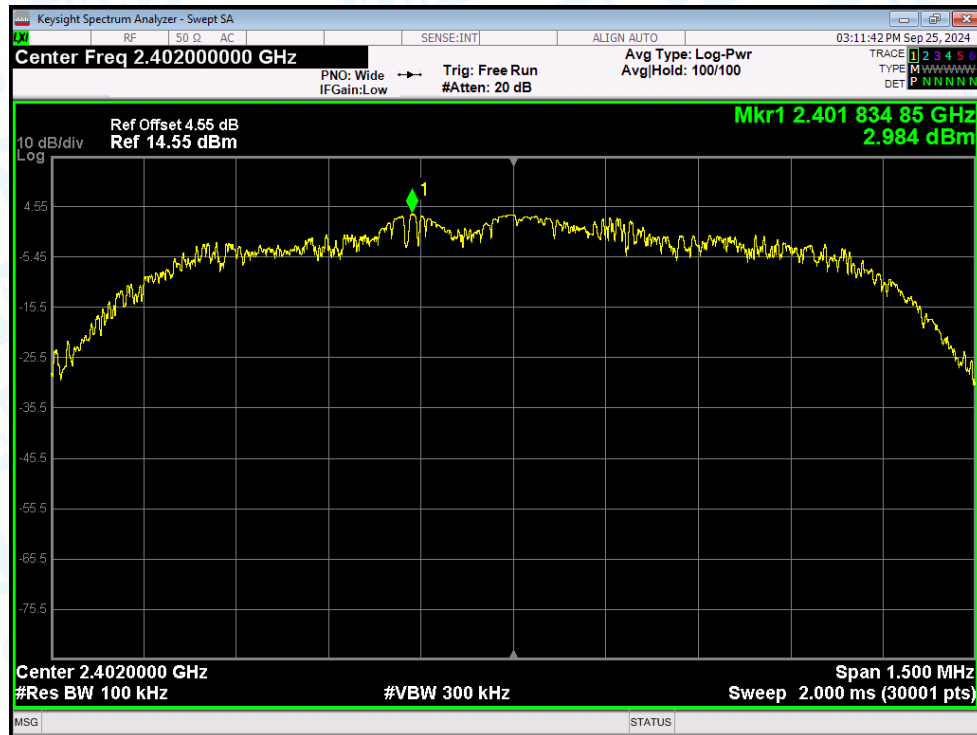


Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Emission

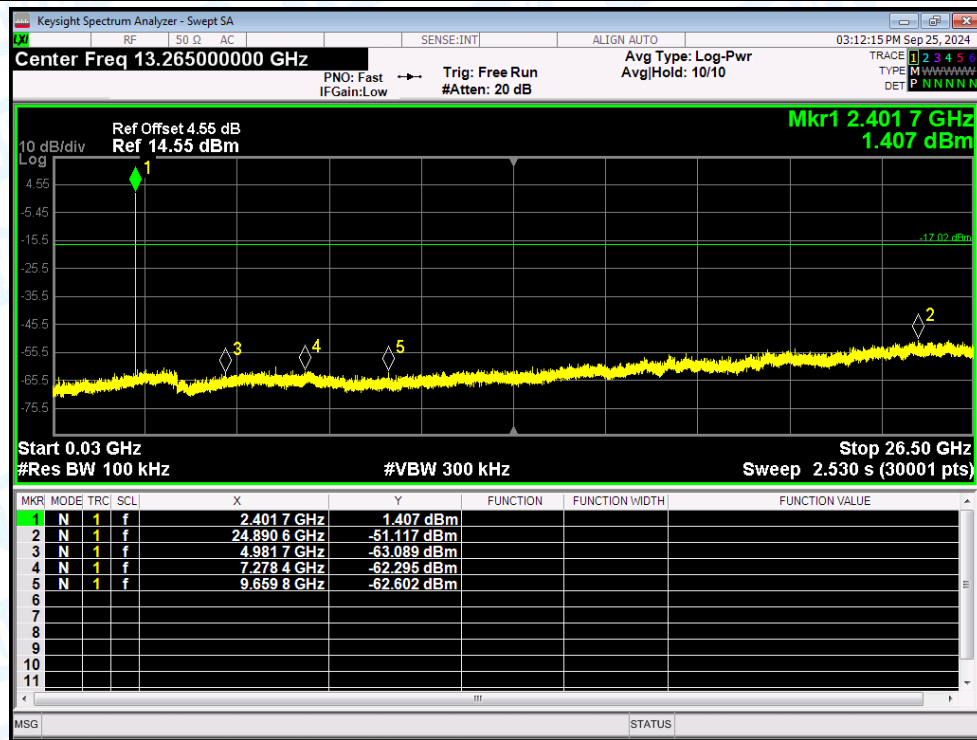


Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Ref

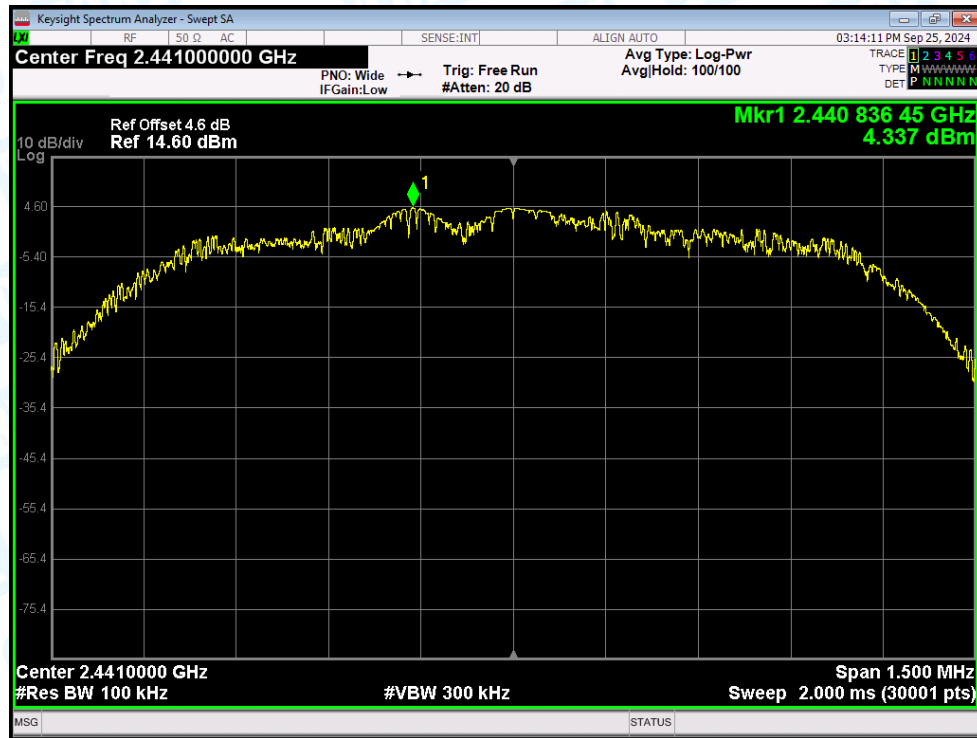


Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Emission

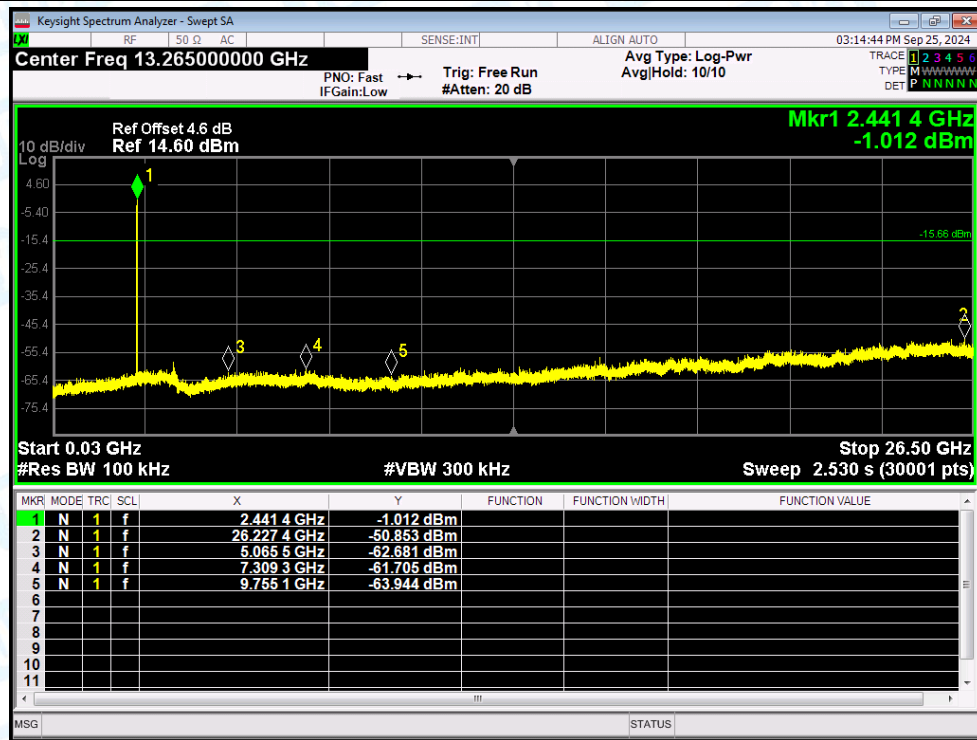

Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Ref

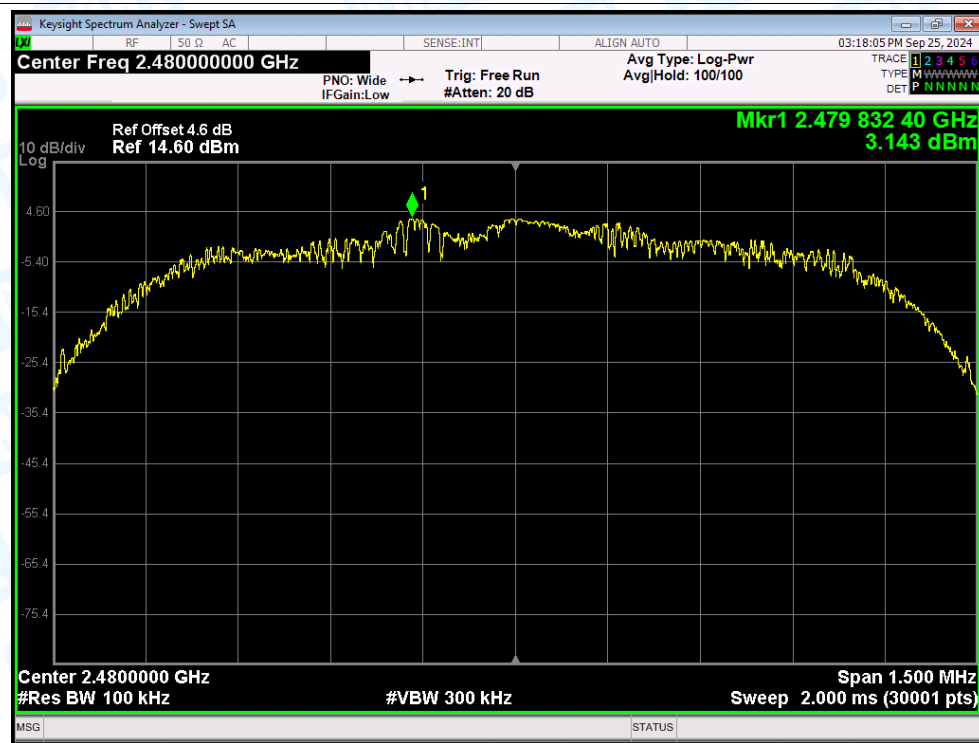

Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Emission

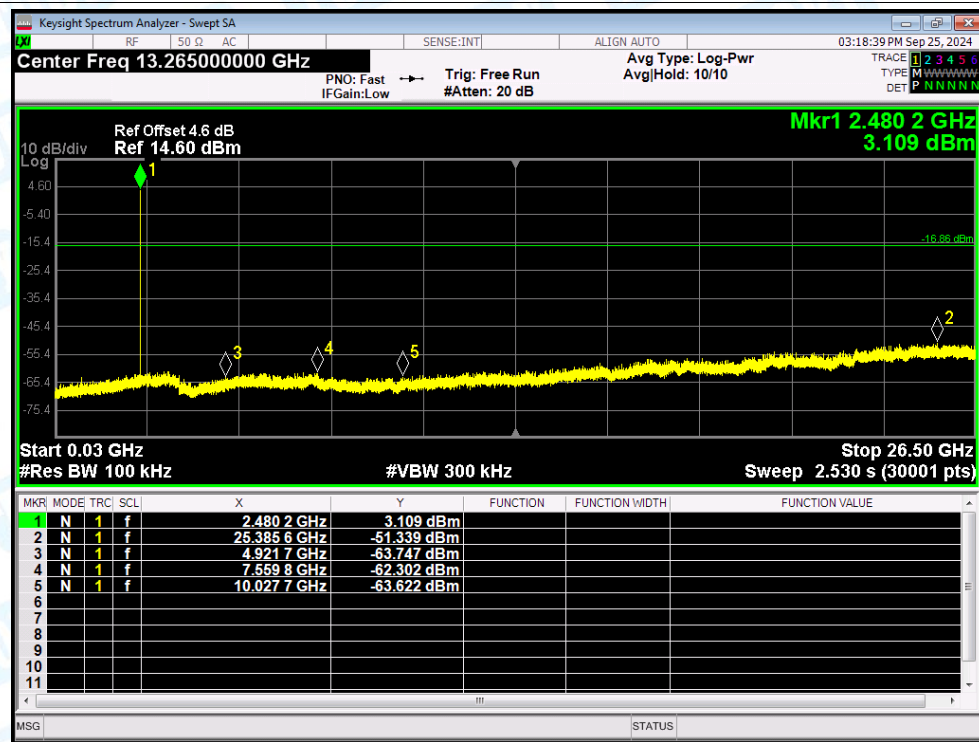


8. Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	2310	-47.65	2	-	49.61	Peak	74	Pass
NVNT	1-DH1	2402	Ant1	No-Hopping	2310	-55.85	2	4.95	46.36	Average	54	Pass
NVNT	1-DH1	2402	Ant1	No-Hopping	2386.512	-44.63	2	-	52.63	Peak	74	Pass
NVNT	1-DH1	2402	Ant1	No-Hopping	2387.568	-55.24	2	4.95	46.97	Average	54	Pass
NVNT	1-DH1	2402	Ant1	No-Hopping	2390	-48.54	2	-	48.72	Peak	74	Pass
NVNT	1-DH1	2402	Ant1	No-Hopping	2390	-55.5	2	4.95	46.71	Average	54	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	2483.5	-46.87	2	-	50.39	Peak	74	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	2483.5	-55.15	2	4.84	46.95	Average	54	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	2483.56	-42.82	2	-	54.44	Peak	74	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	2490.808	-54.74	2	4.84	47.36	Average	54	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	2500	-45.47	2	-	51.79	Peak	74	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	2500	-55.27	2	4.84	46.83	Average	54	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	2310	-48.07	2	-	49.19	Peak	74	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	2310	-56.34	2	4.95	45.87	Average	54	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	2386.896	-45.08	2	-	52.18	Peak	74	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	2384.688	-55.34	2	4.95	46.87	Average	54	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	2390	-47.77	2	-	49.49	Peak	74	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	2390	-56.1	2	4.95	46.11	Average	54	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	2483.5	-48	2	-	49.26	Peak	74	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	2483.5	-55.59	2	4.95	46.62	Average	54	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	2483.896	-40.71	2	-	56.55	Peak	74	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	2485.336	-54.83	2	4.95	47.38	Average	54	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	2500	-47.32	2	-	49.94	Peak	74	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	2500	-54.95	2	4.95	47.26	Average	54	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	2310	-49.21	2	-	48.05	Peak	74	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	2310	-56.25	2	4.95	45.96	Average	54	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	2383.728	-45.05	2	-	52.21	Peak	74	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	2366.448	-55.46	2	4.95	46.75	Average	54	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	2390	-48.37	2	-	48.89	Peak	74	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	2390	-55.83	2	4.95	46.38	Average	54	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	2483.5	-48.26	2	-	49	Peak	74	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	2483.5	-55.67	2	4.95	46.54	Average	54	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	2483.728	-40.8	2	-	56.46	Peak	74	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	2483.92	-54.65	2	4.95	47.56	Average	54	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	2500	-48.02	2	-	49.24	Peak	74	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	2500	-55.16	2	4.95	47.05	Average	54	Pass

Test Graphs


Restrict Band NVNT 1-DH1 2402MHz Ant1 No-Hopping Peak

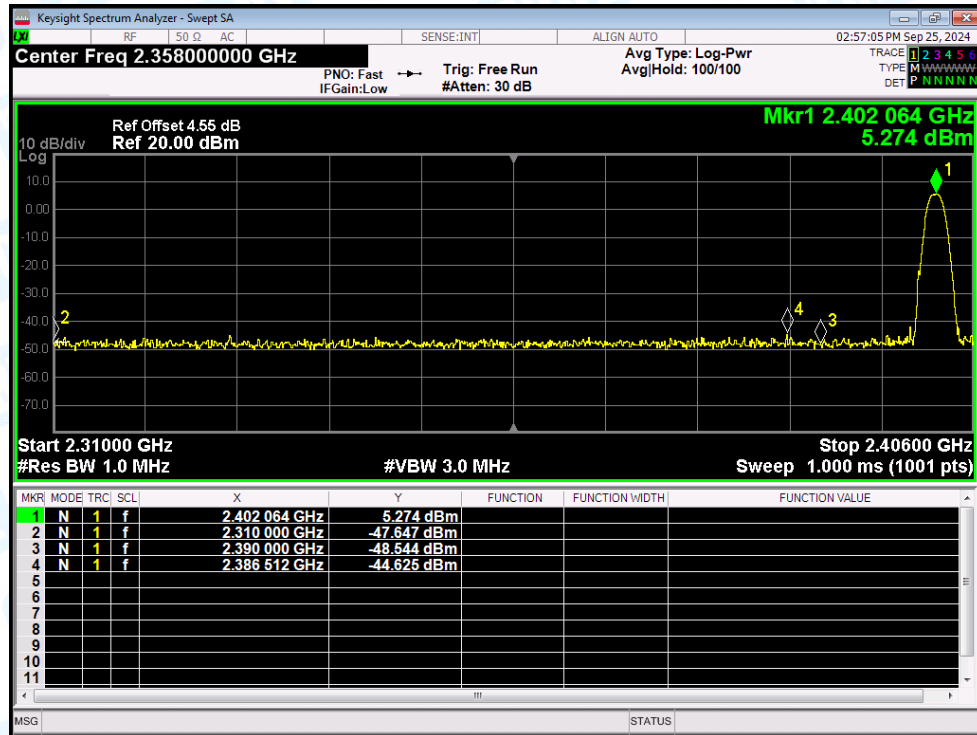


Restrict Band NVNT 1-DH1 2402MHz Ant1 No-Hopping Average

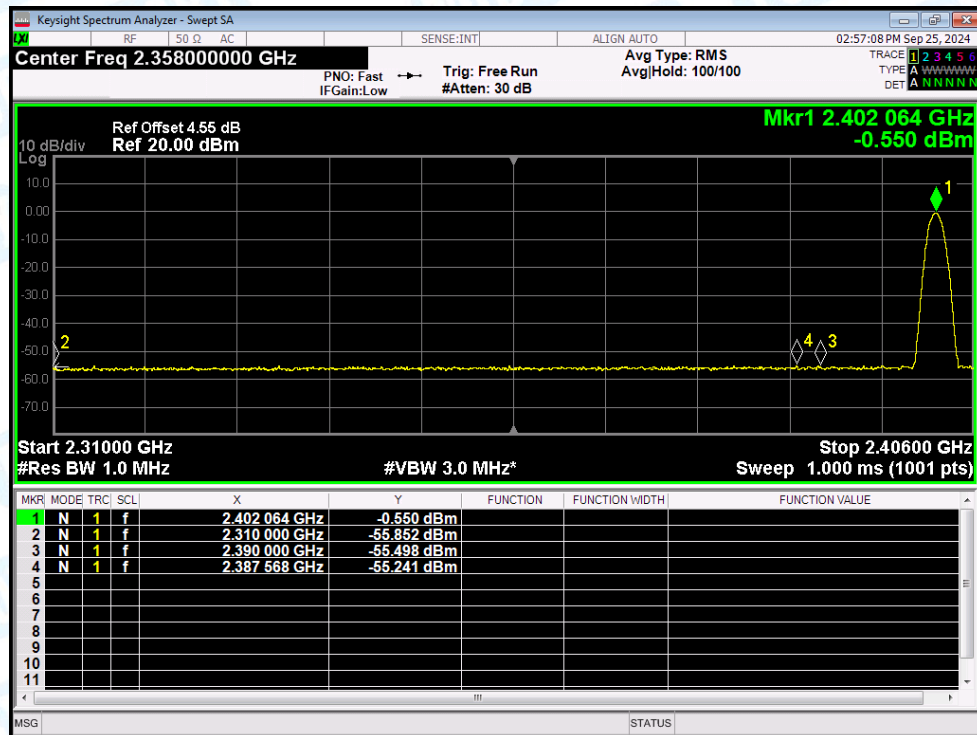


Restrict Band NVNT 1-DH1 2480MHz Ant1 No-Hopping Peak

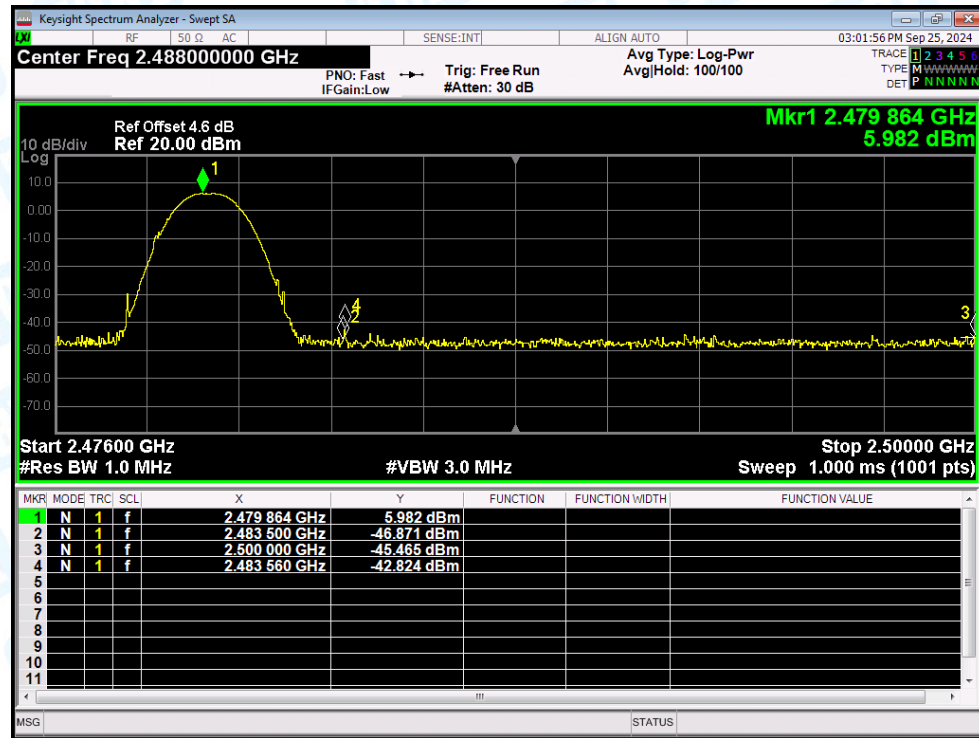


Restrict Band NVNT 1-DH1 2480MHz Ant1 No-Hopping Average

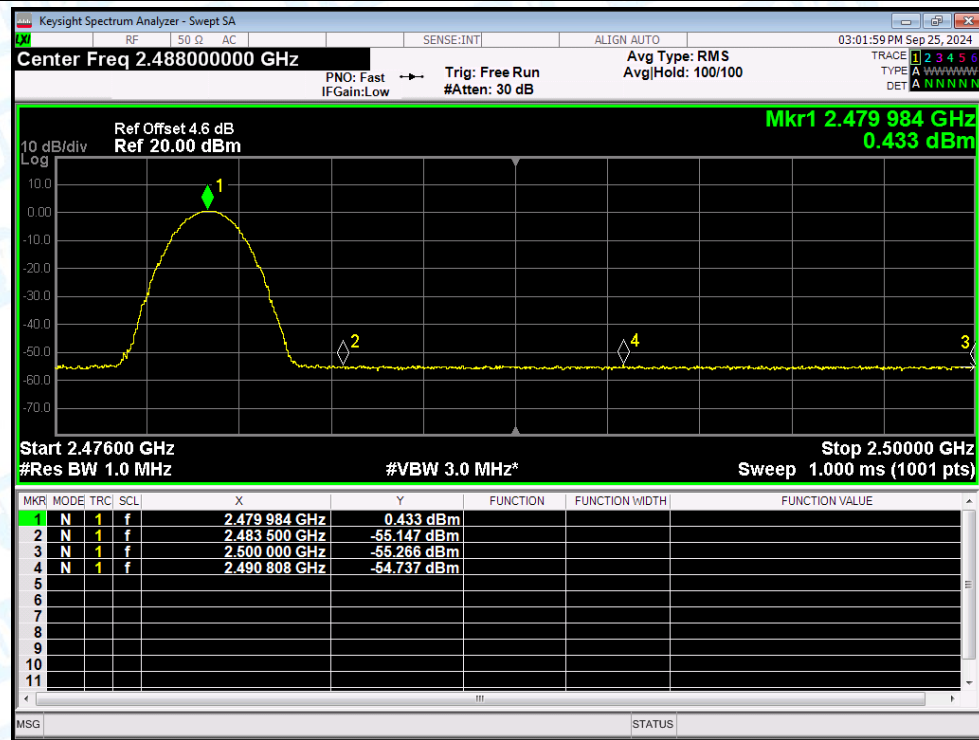


Restrict Band NVNT 2-DH1 2402MHz Ant1 No-Hopping Peak

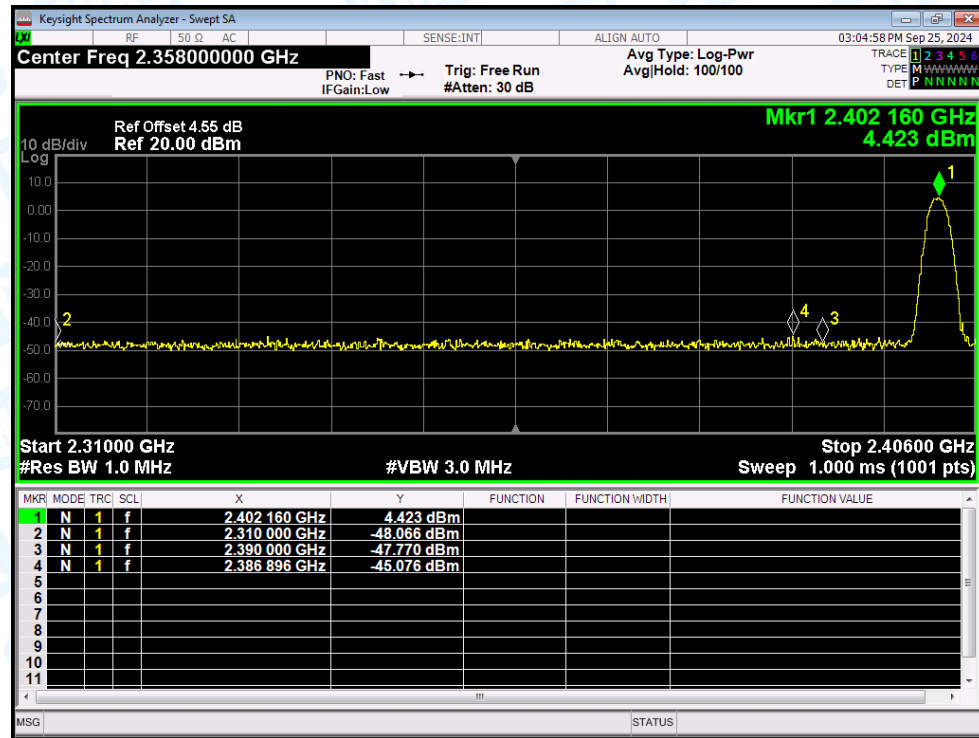


Restrict Band NVNT 2-DH1 2402MHz Ant1 No-Hopping Average

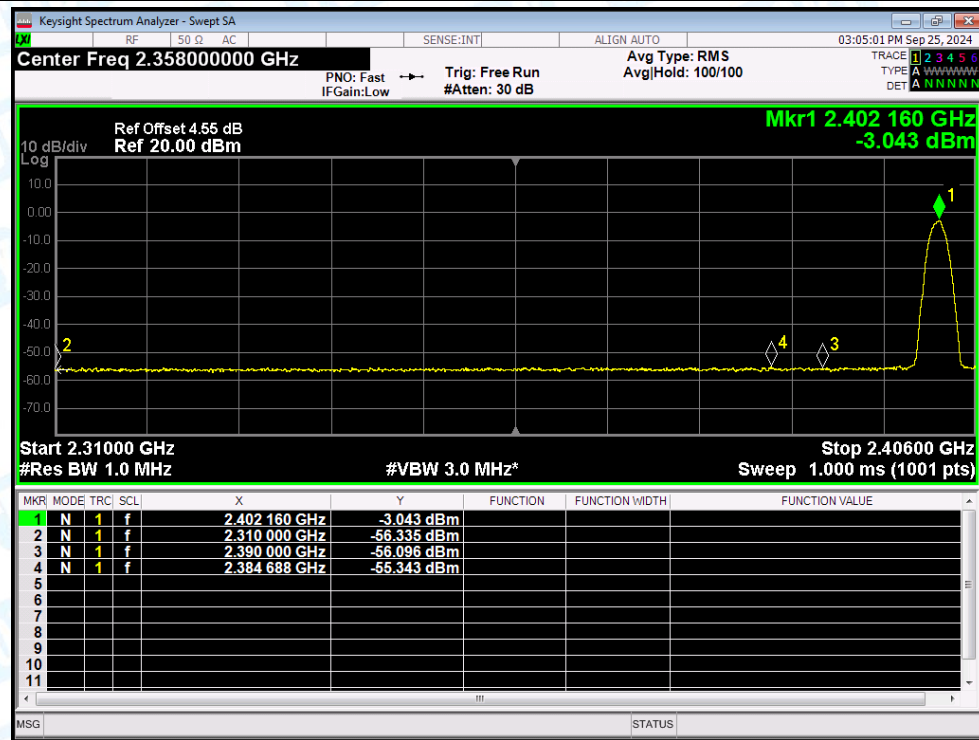


Restrict Band NVNT 2-DH1 2480MHz Ant1 No-Hopping Peak

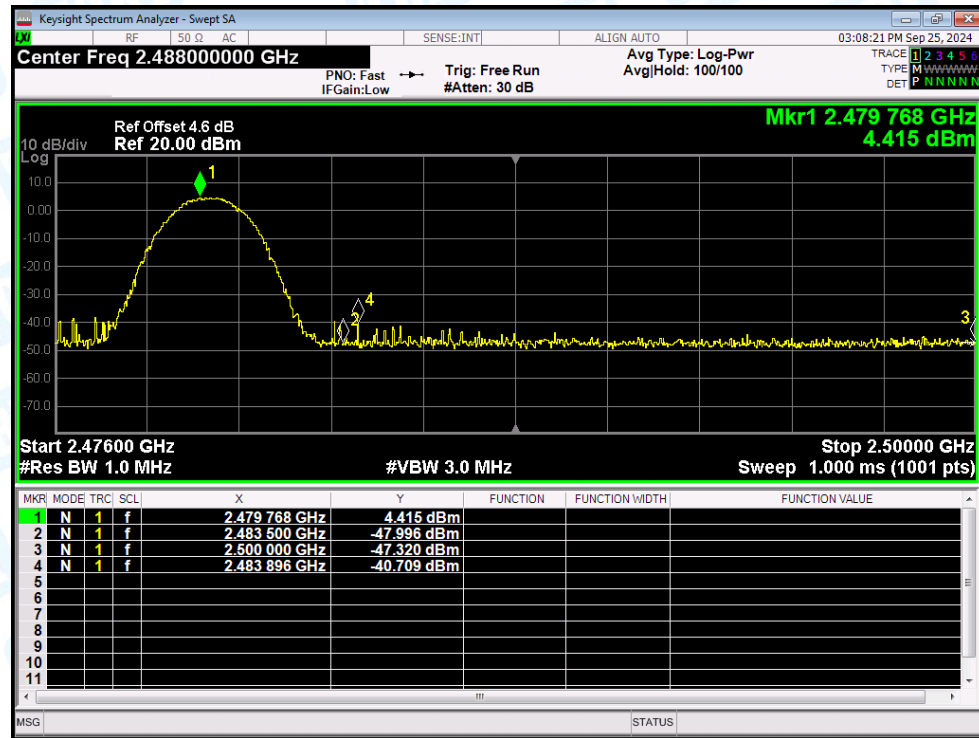


Restrict Band NVNT 2-DH1 2480MHz Ant1 No-Hopping Average

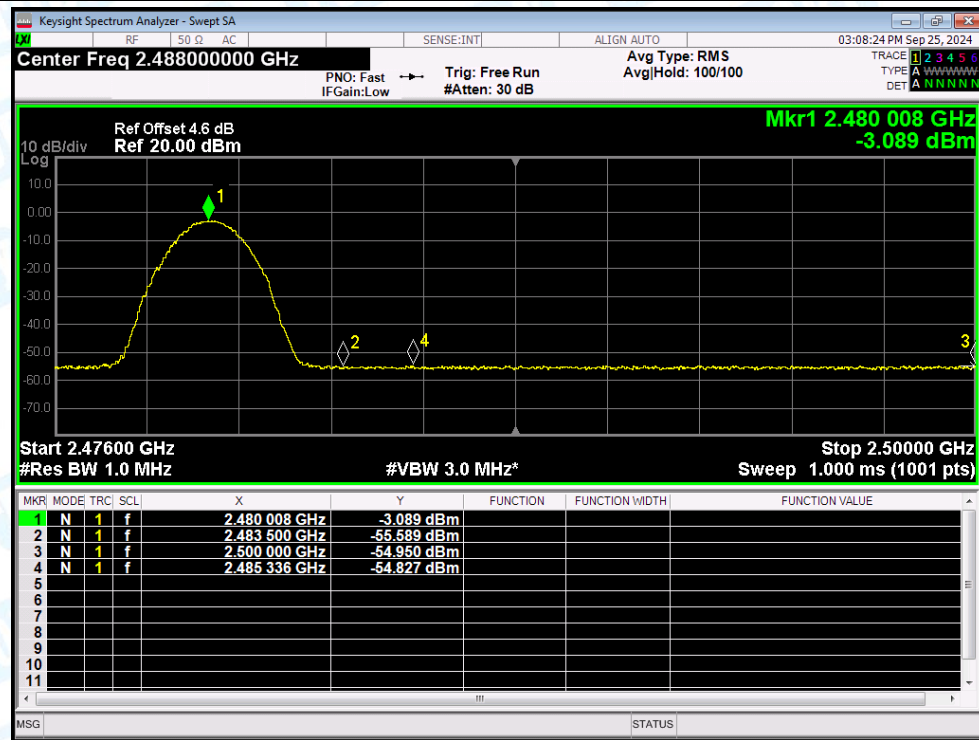


Restrict Band NVNT 3-DH1 2402MHz Ant1 No-Hopping Peak

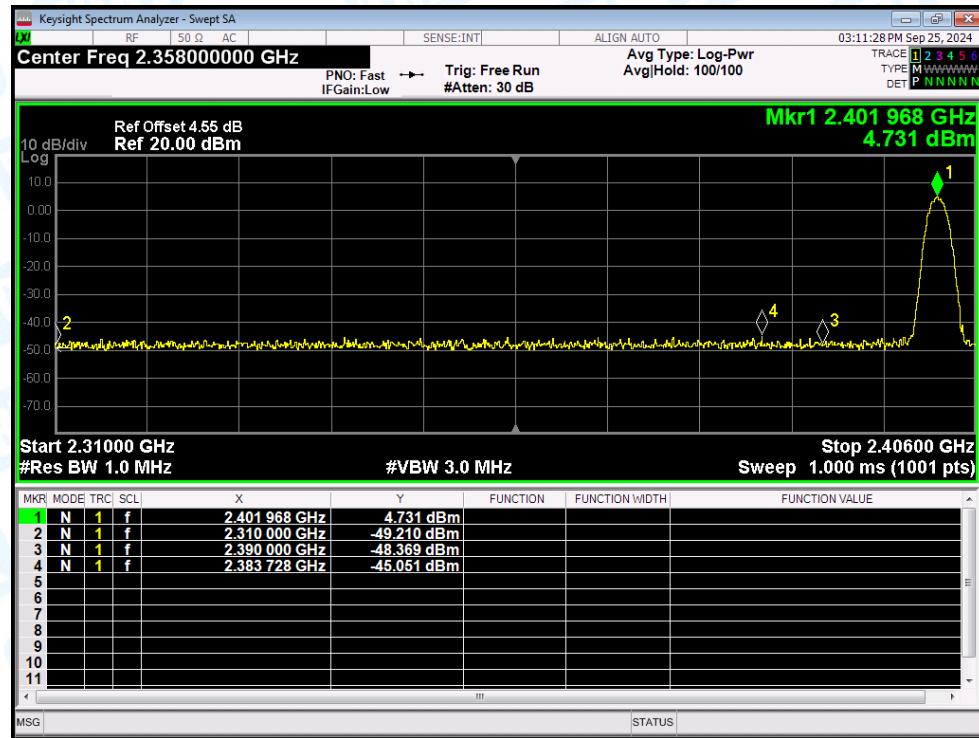


Restrict Band NVNT 3-DH1 2402MHz Ant1 No-Hopping Average

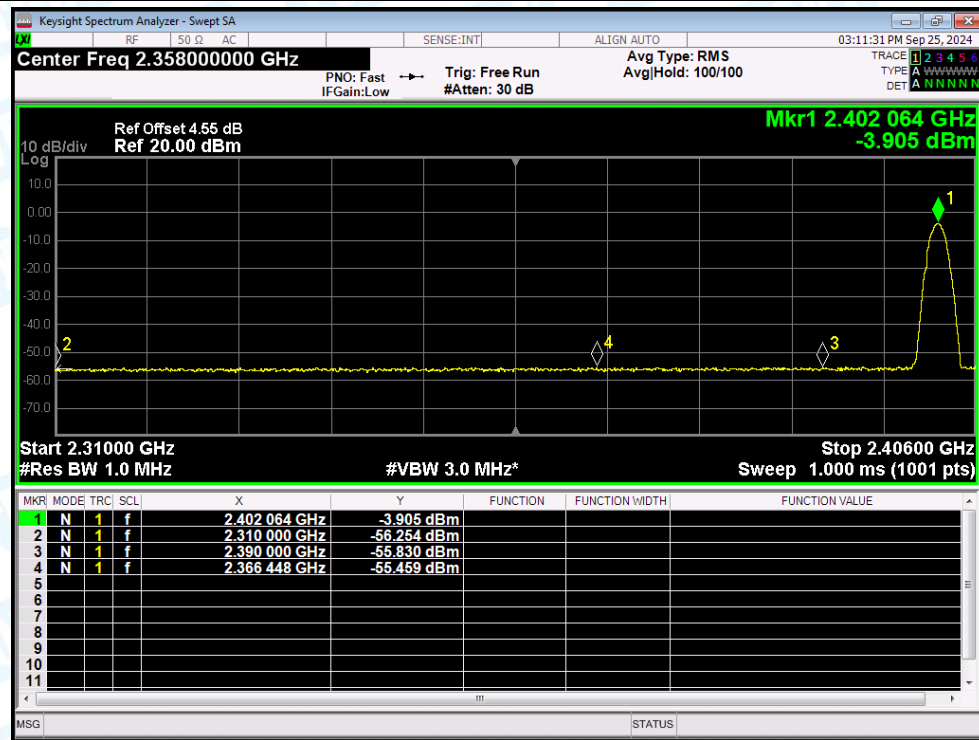

Restrict Band NVNT 3-DH1 2480MHz Ant1 No-Hopping Peak

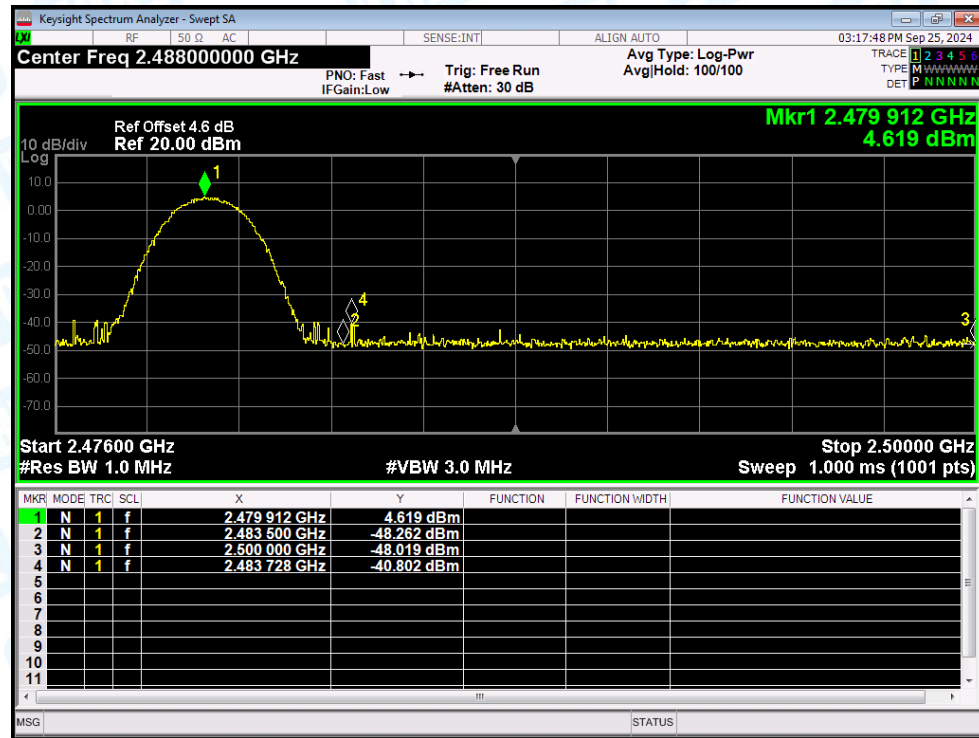

Restrict Band NVNT 3-DH1 2480MHz Ant1 No-Hopping Average

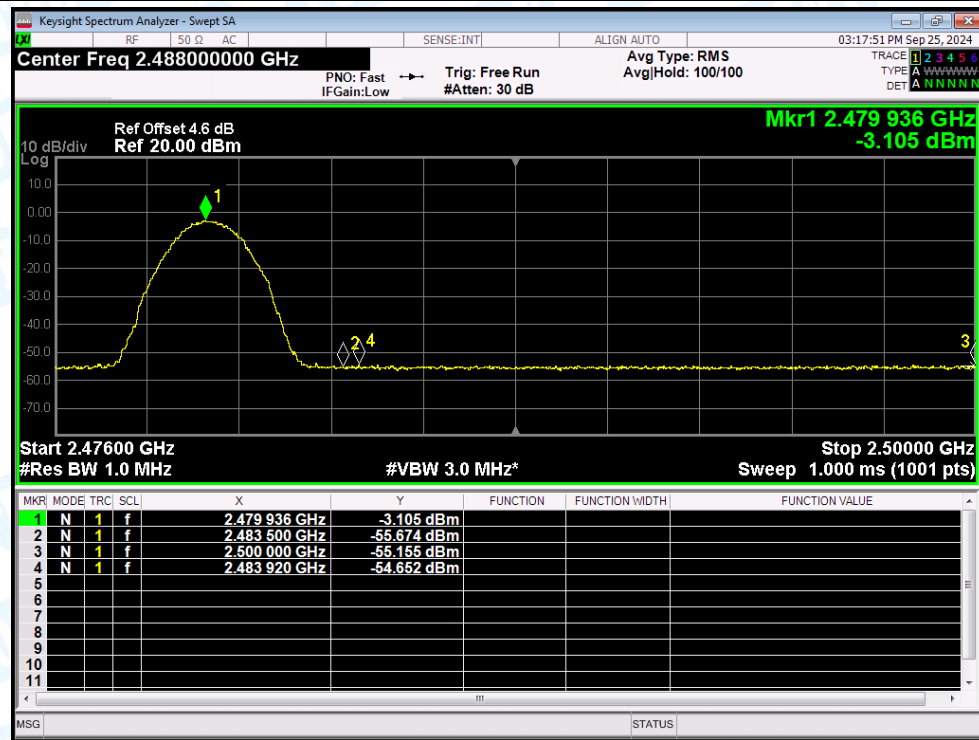


9. Carrier Frequencies Separation


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	Ant1	2440.837	2442.031	1.194	0.587	Pass
NVNT	2-DH1	Ant1	2441.029	2442.028	0.999	0.84	Pass
NVNT	3-DH1	Ant1	2441.026	2442.007	0.981	0.833	Pass


Test Graphs

CFS NVNT 1-DH1 2441MHz Ant1

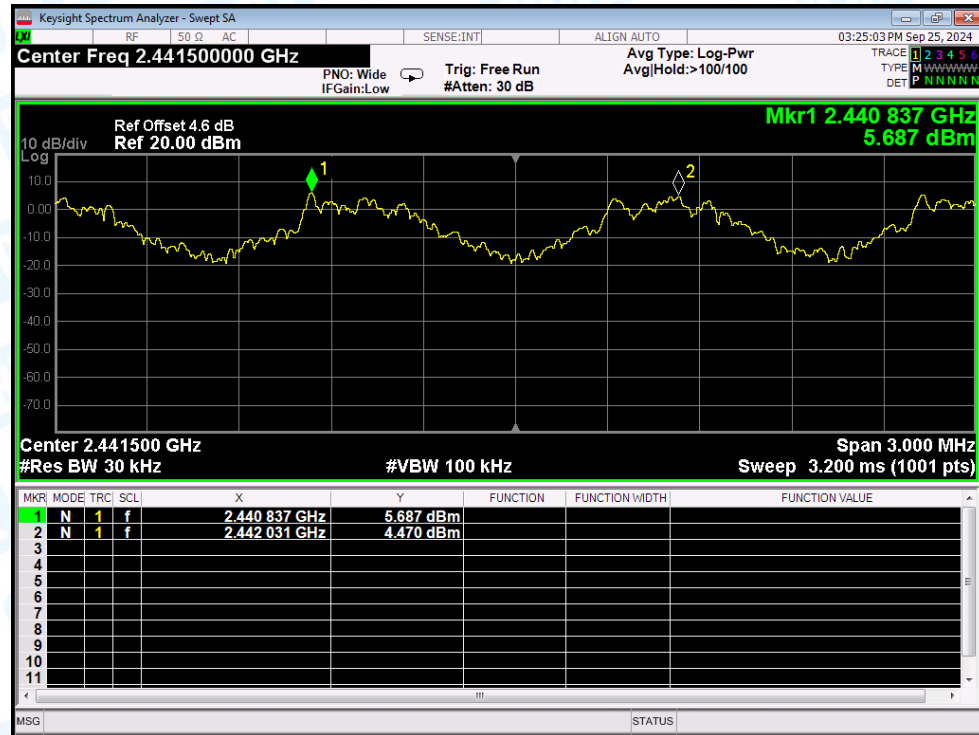

CFS NVNT 2-DH1 2441MHz Ant1

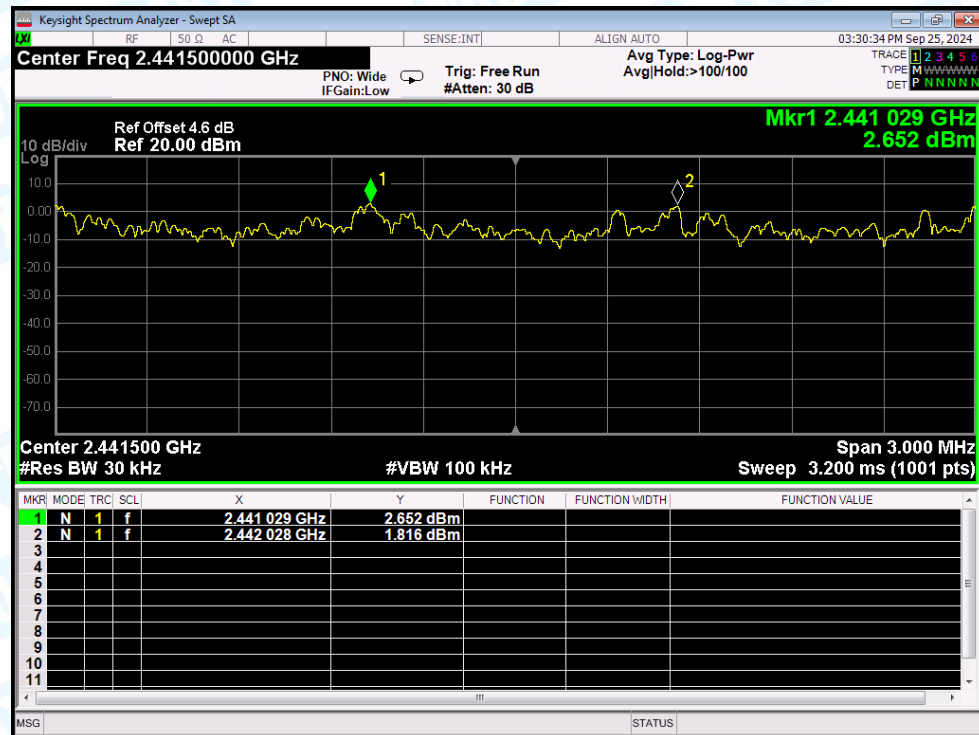

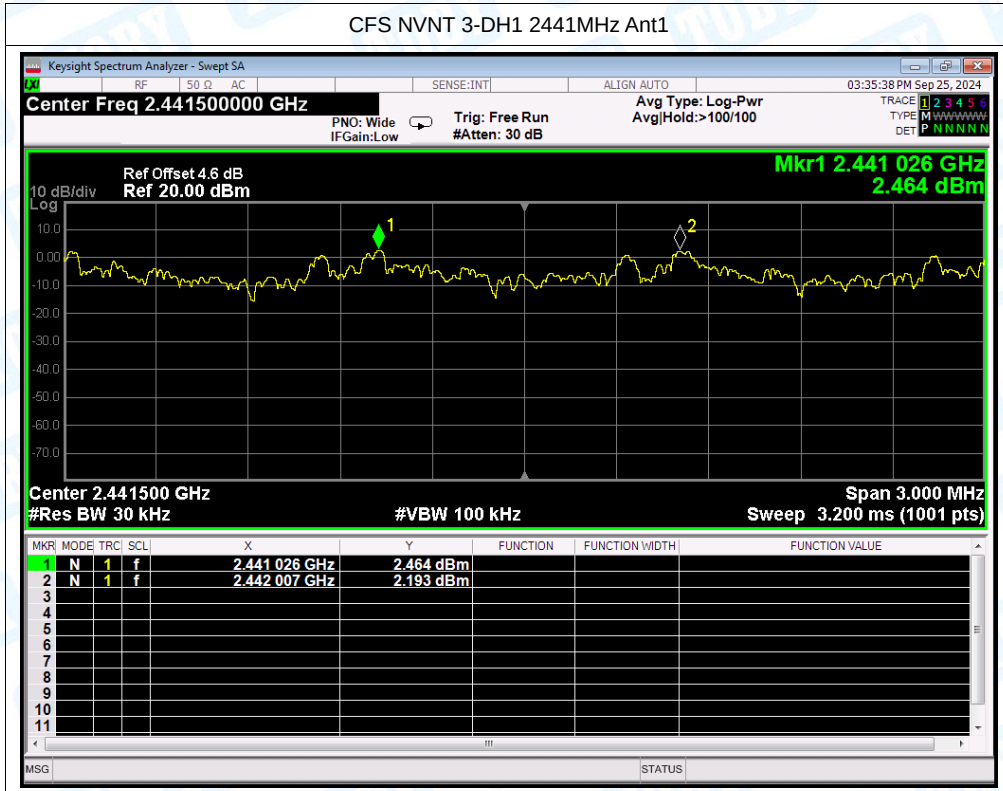


10. Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH1	Ant1	79	15	Pass
NVNT	2-DH1	Ant1	79	15	Pass
NVNT	3-DH1	Ant1	79	15	Pass


Test Graphs

Hopping No. NVNT 1-DH1 2441MHz Ant1

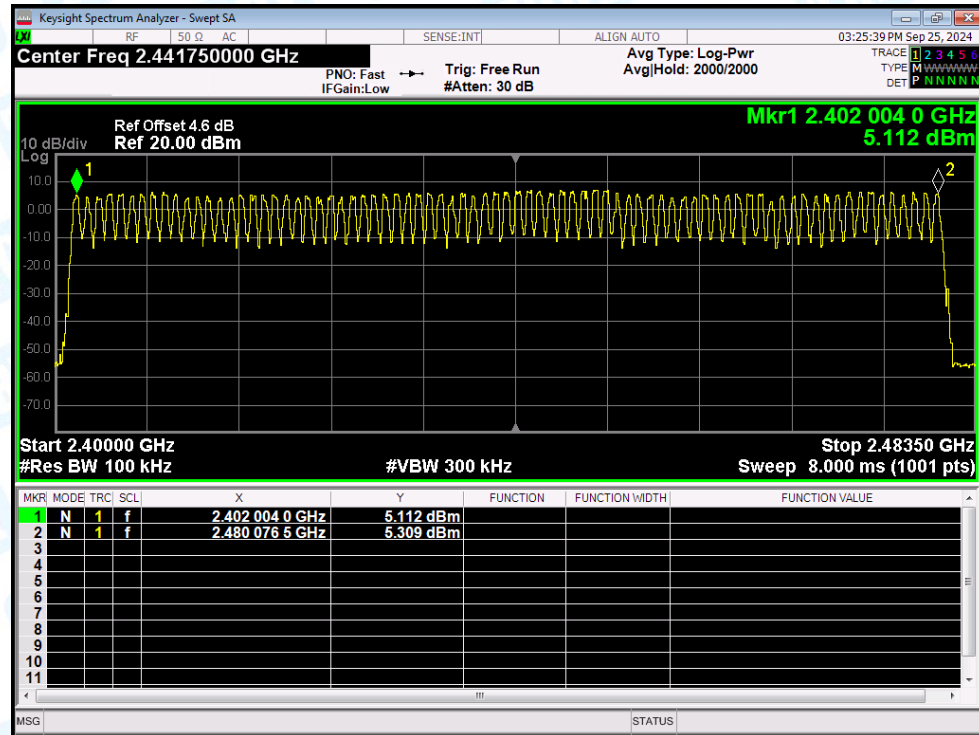

Hopping No. NVNT 2-DH1 2441MHz Ant1

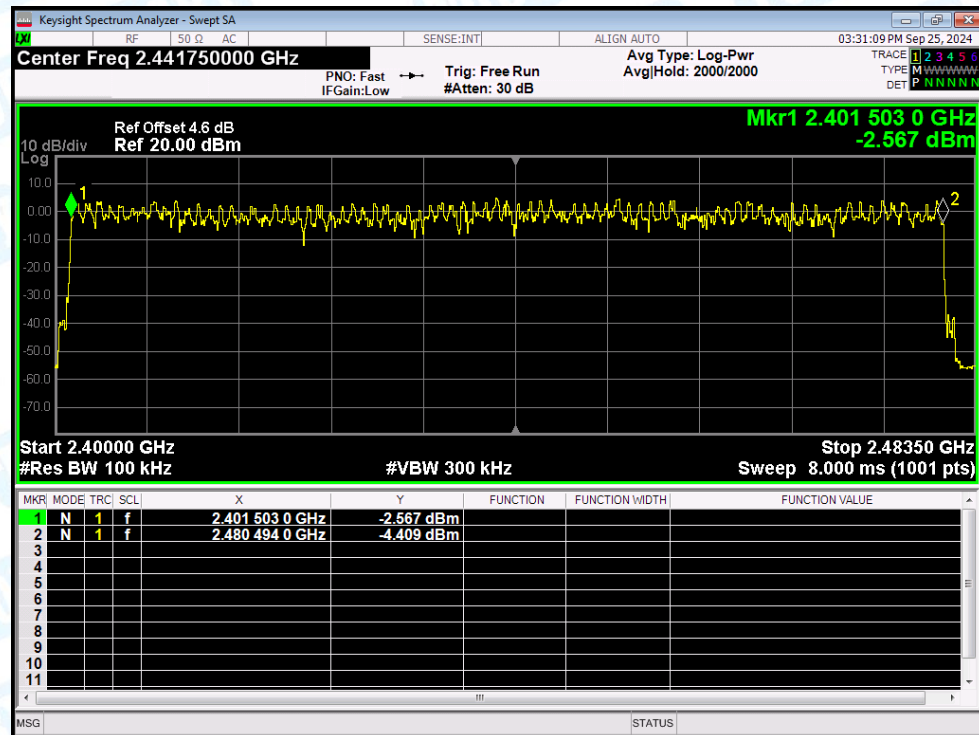

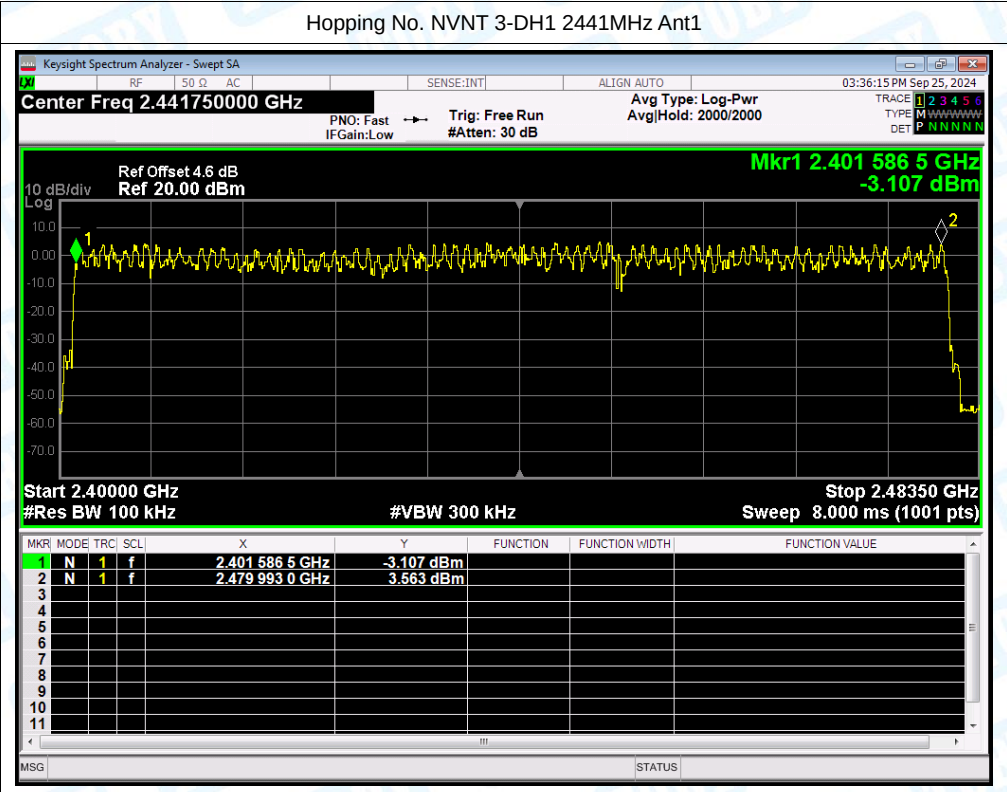


11. Dwell Time


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.405	129.6	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.661	265.76	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.909	310.293	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.399	127.68	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.65	264	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.899	309.227	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.397	127.04	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.646	263.36	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.897	309.013	31600	400	Pass

Test Graphs


Dwell NVNT 1-DH1 2441MHz Ant1

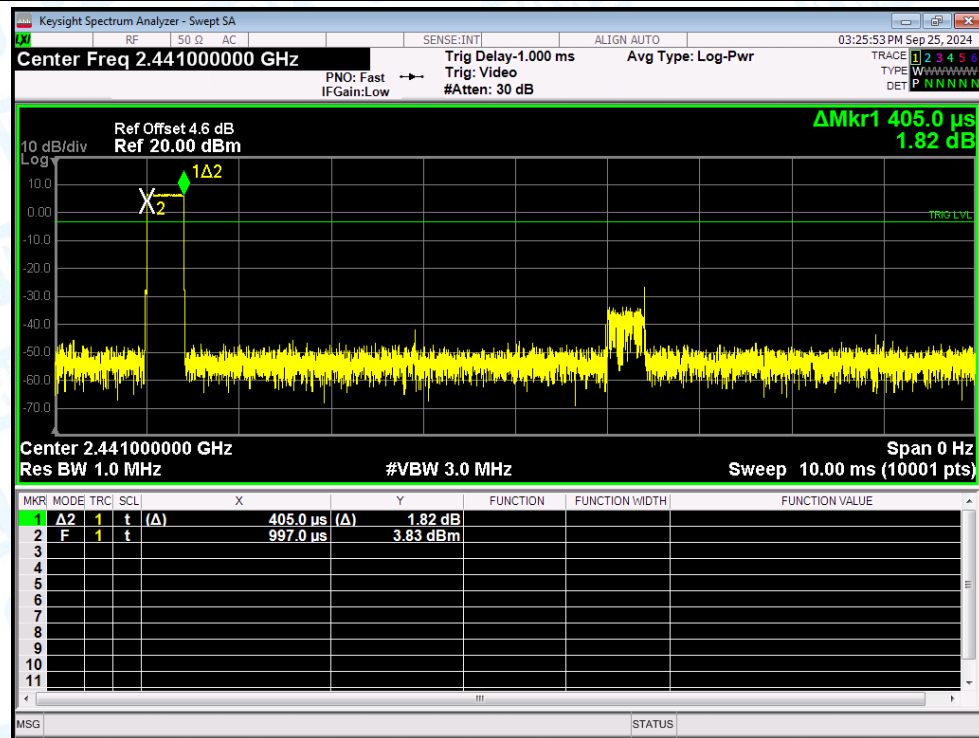


Dwell NVNT 1-DH3 2441MHz Ant1

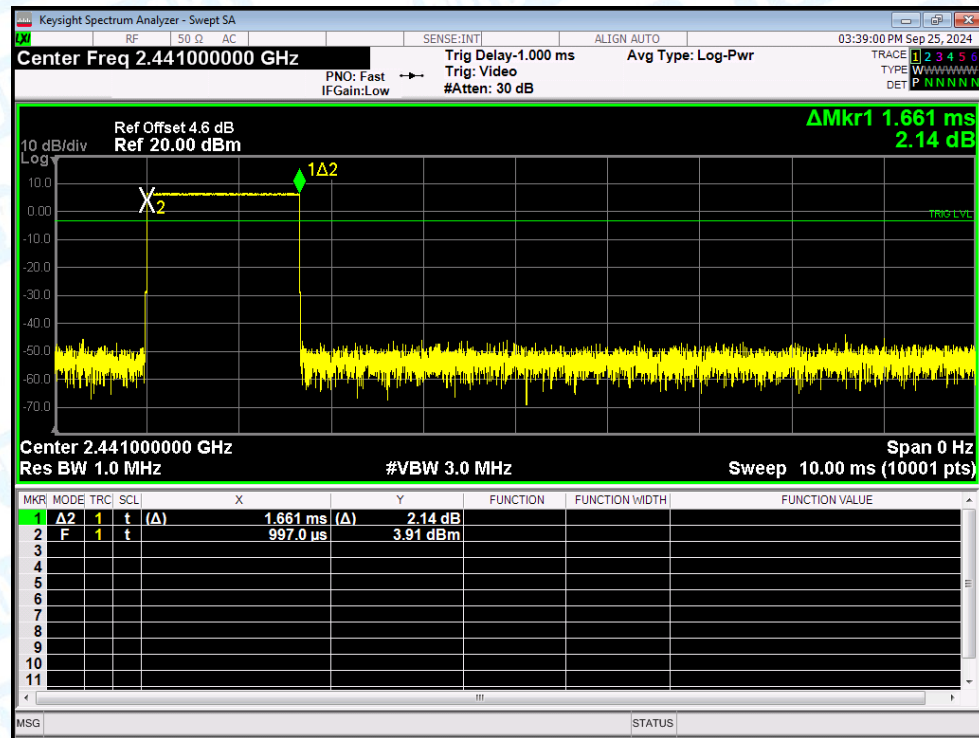


Dwell NVNT 1-DH5 2441MHz Ant1

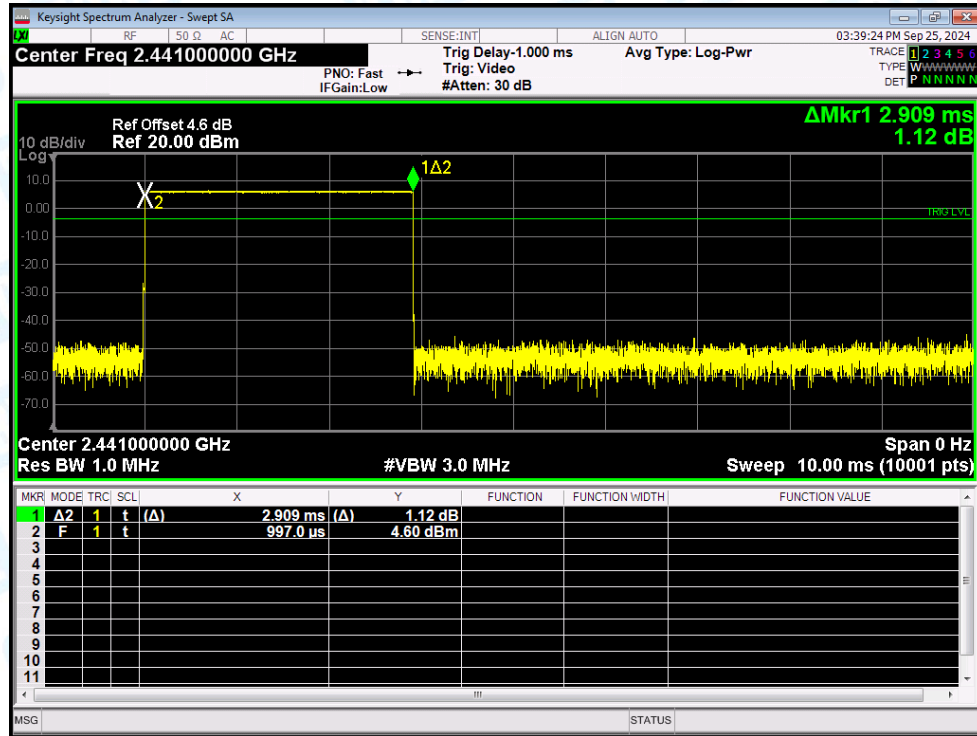


Dwell NVNT 2-DH1 2441MHz Ant1

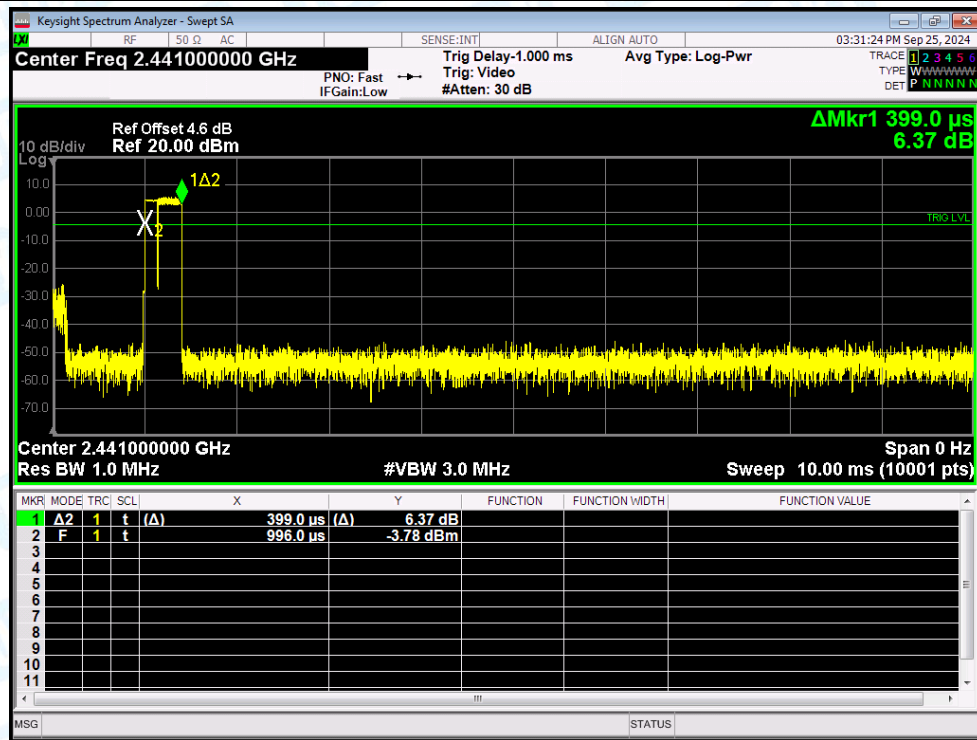


Dwell NVNT 2-DH3 2441MHz Ant1

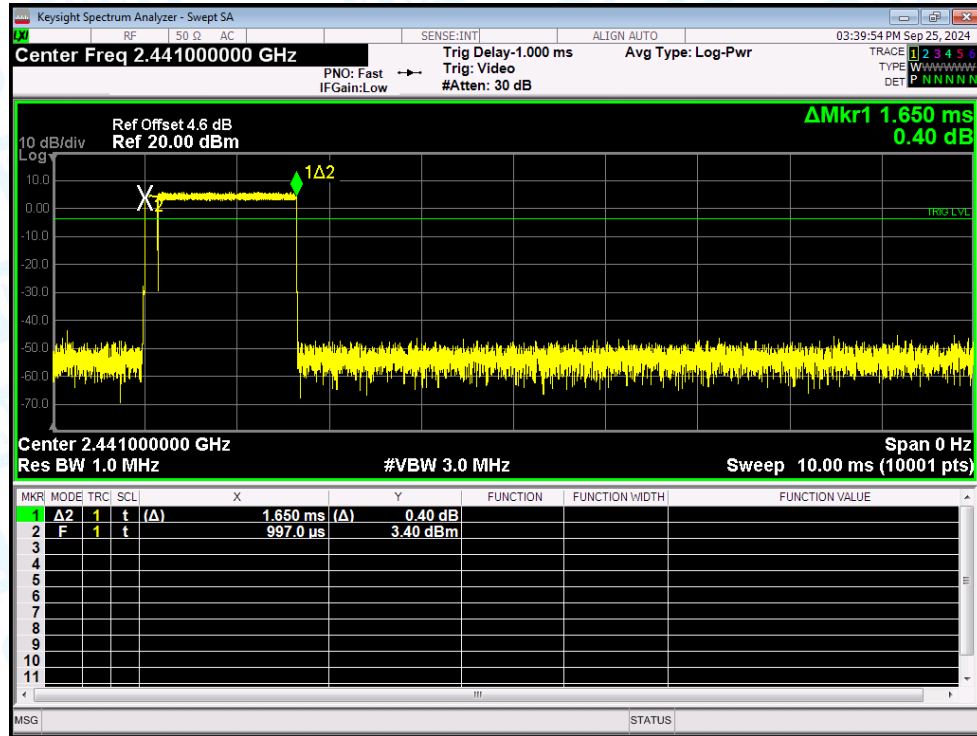


Dwell NVNT 2-DH5 2441MHz Ant1

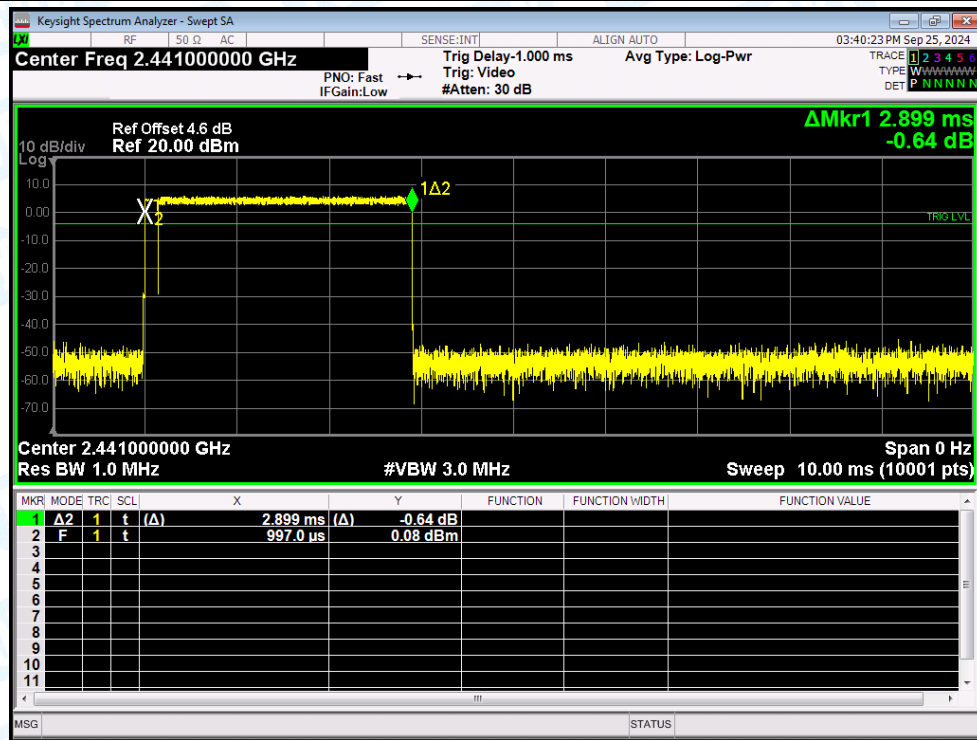


Dwell NVNT 3-DH1 2441MHz Ant1

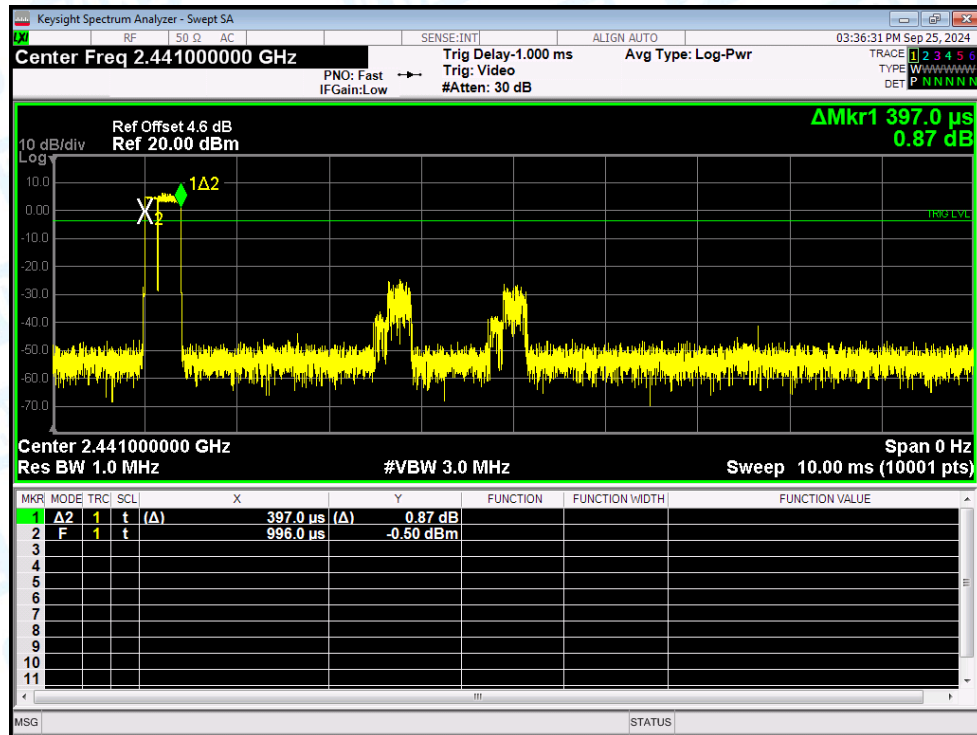

Dwell NVNT 3-DH3 2441MHz Ant1

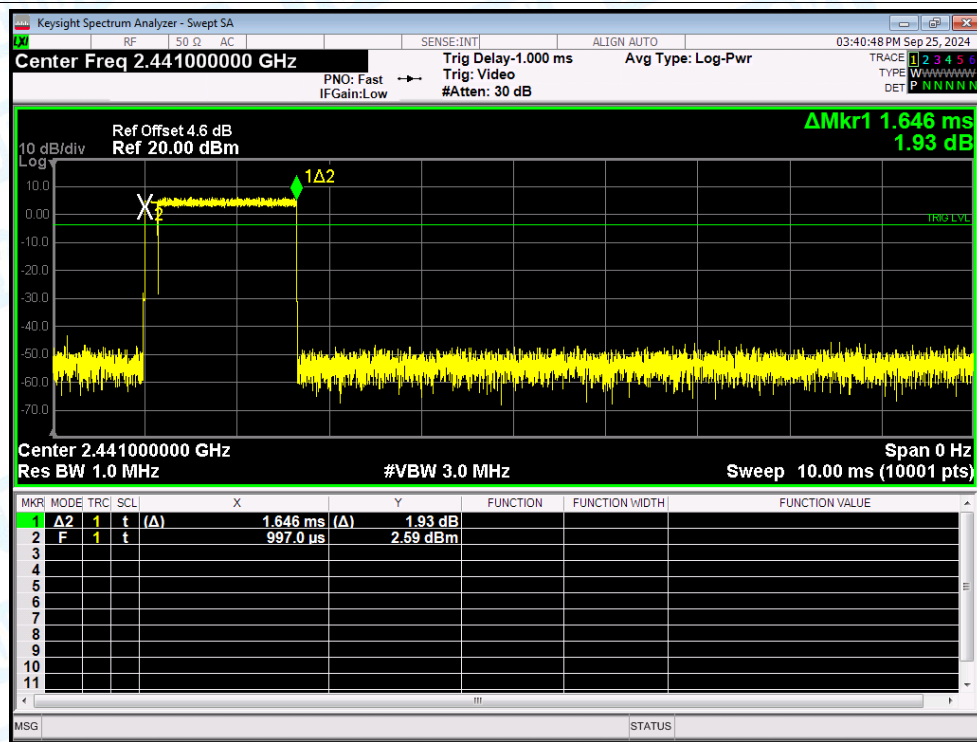

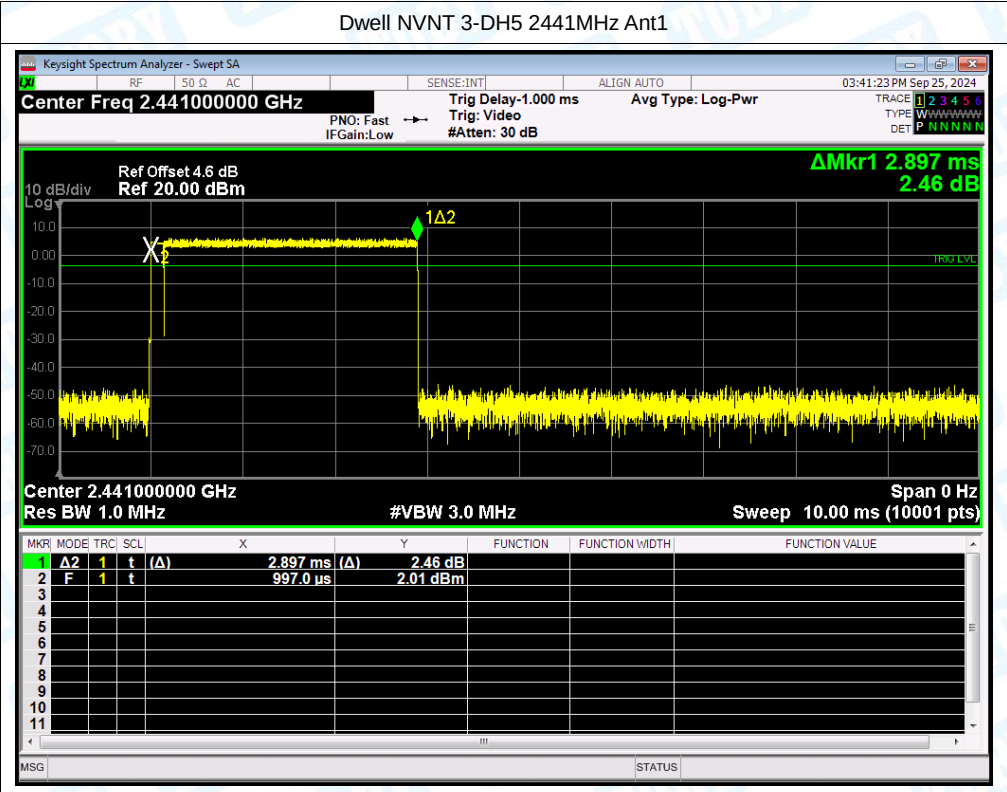

-----END OF THE REPORT-----