



A D T

### 802.11a – Channel 100


#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3665.625 PK	58.79	74	-15.21	-45.15	-45.87	6.01	-36.47
2	3665.625 AV	50.63	54	-3.37	-52.86	-54.62	6.01	-44.63
3	7334.375 PK	58.28	74	-15.72	-44.9	-47.48	6.01	-36.98
4	7334.375 AV	47.1	54	-6.9	-56.73	-57.68	6.01	-48.16
5	10996.875 PK	57.05	74	-16.95	-47.67	-46.83	6.01	-38.21
6	11000 AV	46.5	54	-7.5	-57.59	-57.97	6.01	-48.76
7	16492.875 PK	58.25	74	-15.75	-46.15	-45.92	6.01	-37.01
8	16501.5 AV	46.96	54	-7.04	-57.58	-57.08	6.01	-48.3

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.


### Chain (0)

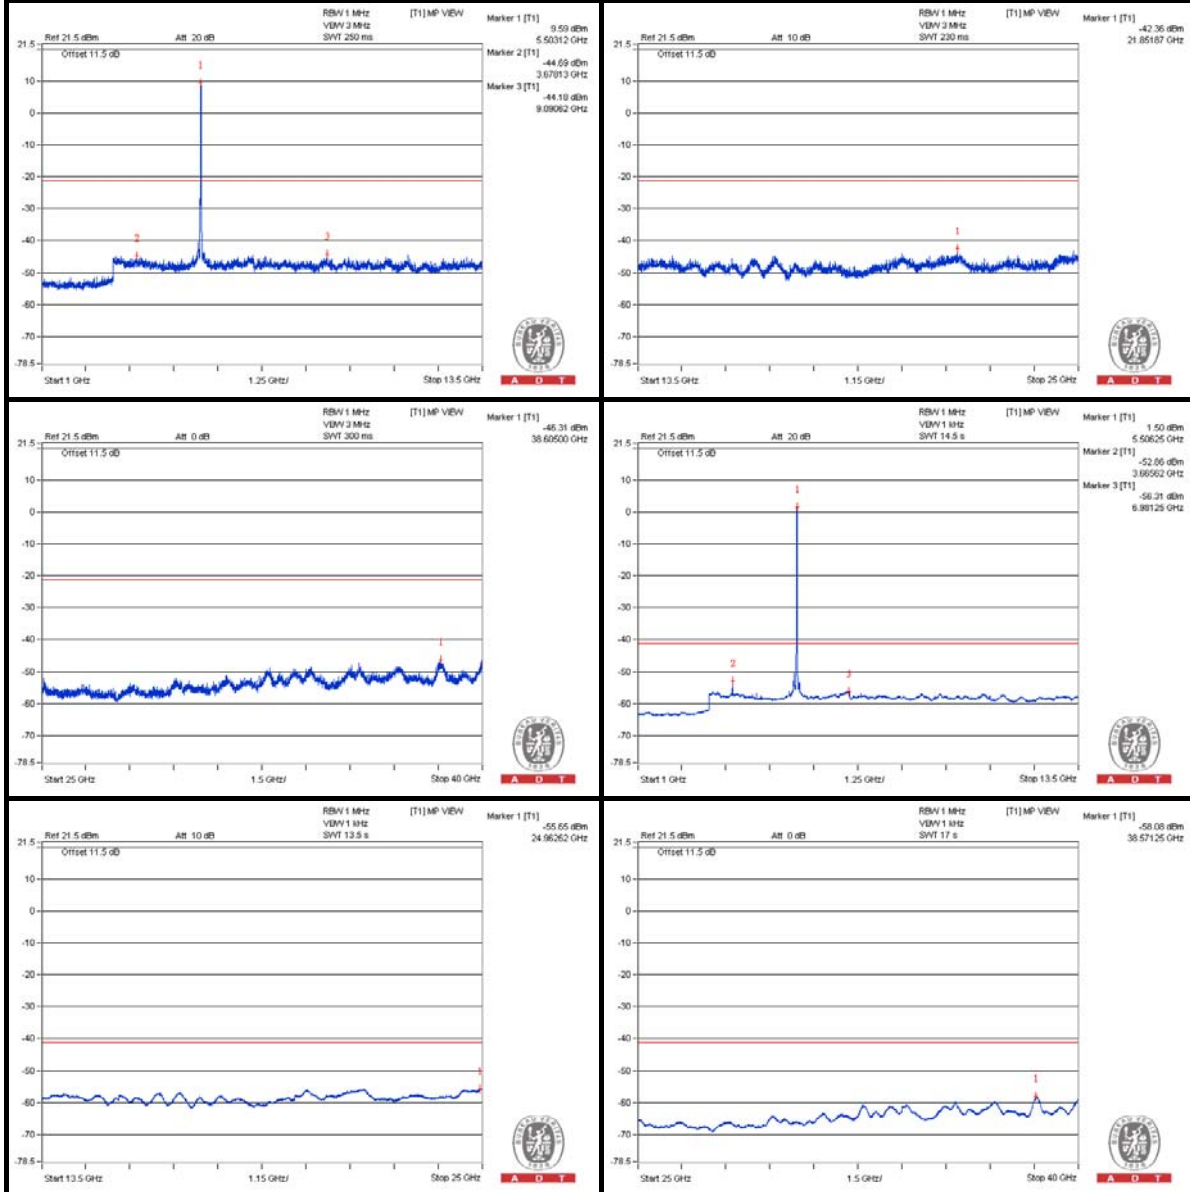



A D T

### Chain (1)

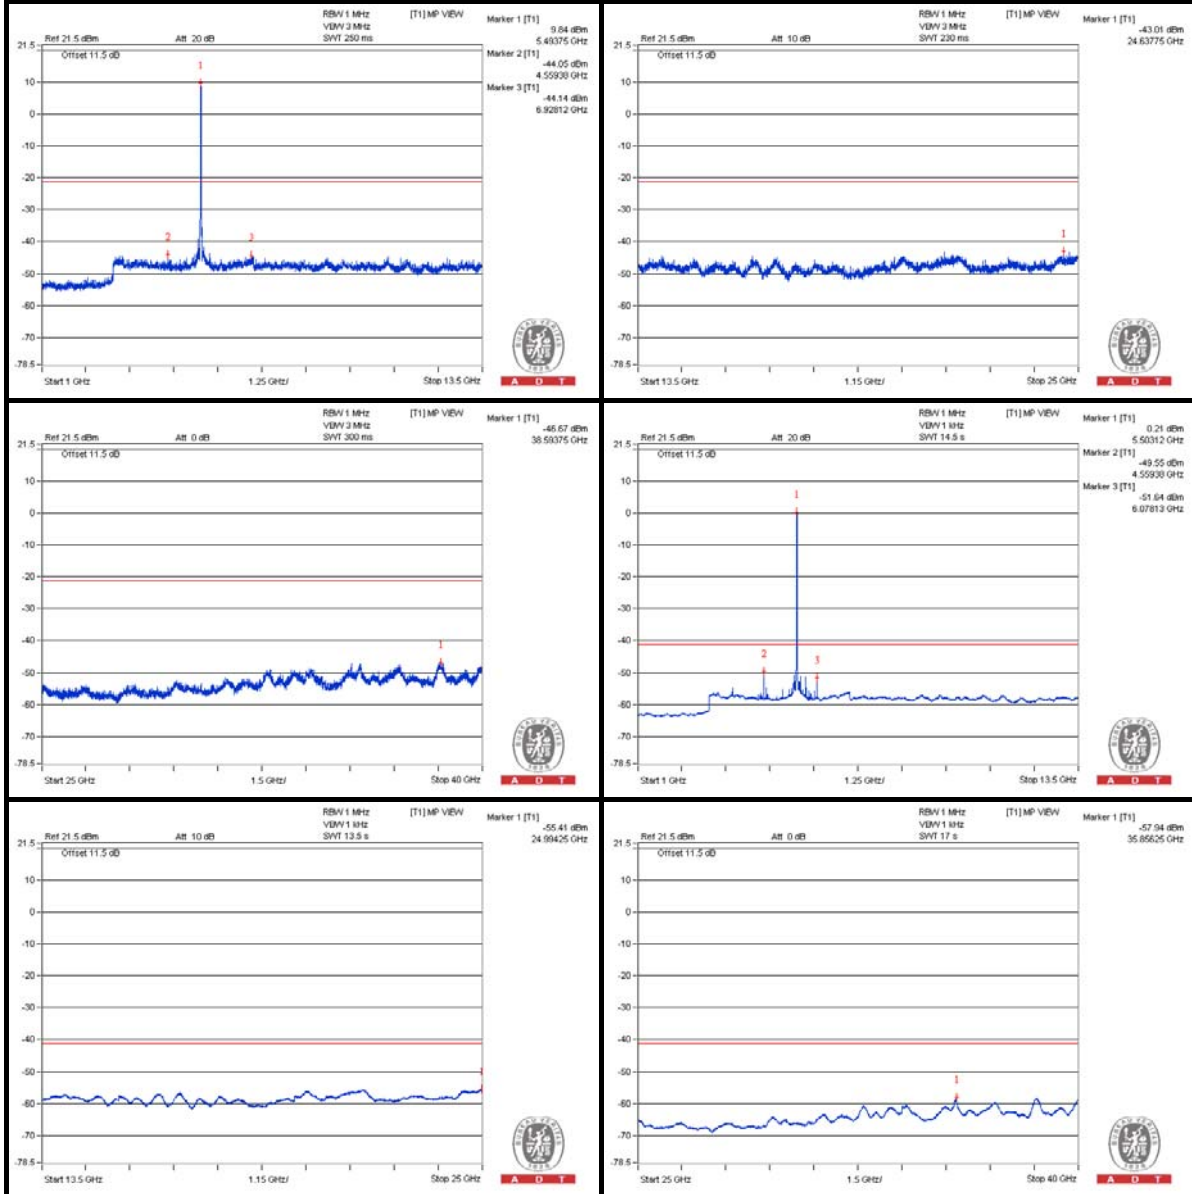

**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5424.5 PK	64.52	74	-9.48	-39.46	-40.08	6.01	-30.74
2	5424 AV	52.37	54	-1.63	-51.43	-52.45	6.01	-42.89

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

**Chain (0)**

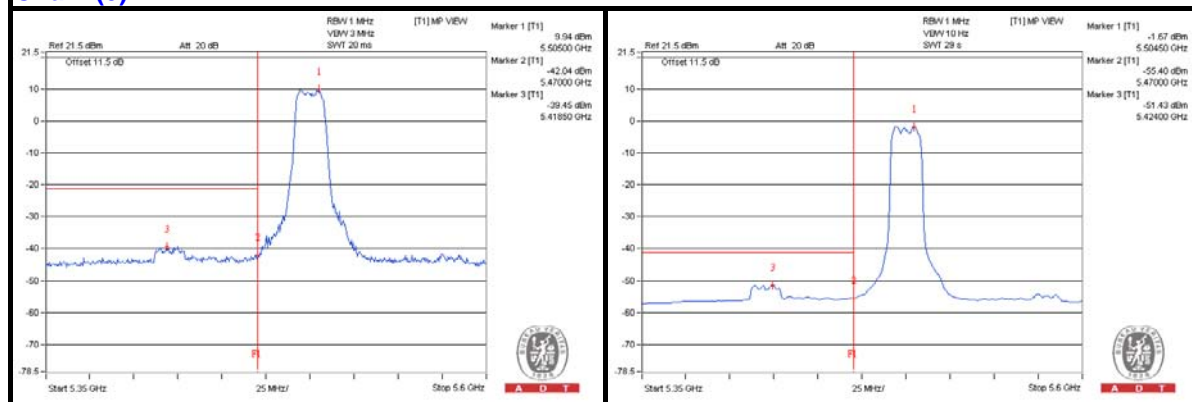

**Chain (1)**

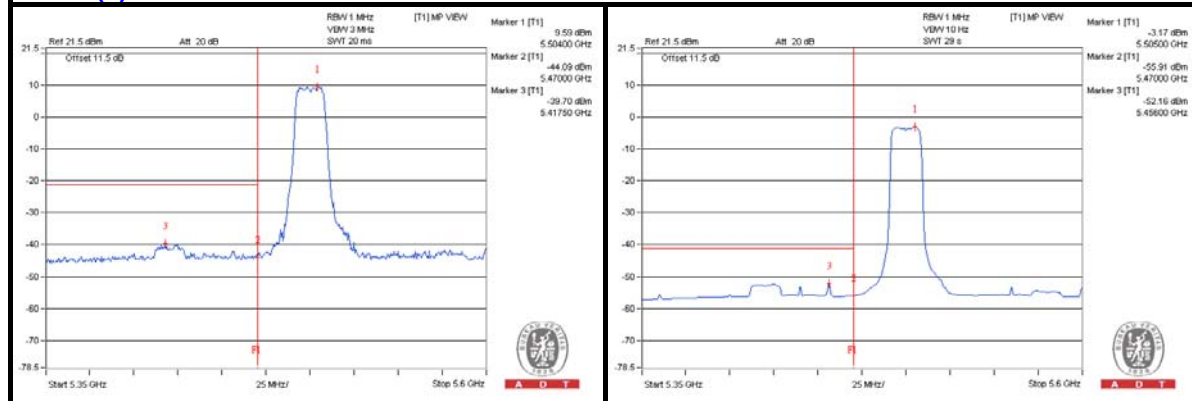



A D T

### 802.11a – Channel 116

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3718.75 PK	59.8	74	-14.2	-43.8	-45.29	6.01	-35.46
2	3718.75 AV	51.35	54	-2.65	-51.16	-55.96	6.01	-43.91
3	7440.625 PK	57.89	74	-16.11	-45.8	-47.08	6.01	-37.37
4	7440.625 AV	48.42	54	-5.58	-54.83	-57.22	6.01	-46.84
5	11168.75 PK	62.74	74	-11.26	-39.25	-46.68	6.01	-32.52
6	11162.5 AV	50.44	54	-3.56	-52.14	-56.68	6.01	-44.82
7	16745.875 PK	59.14	74	-14.86	-50.39	-42.83	6.01	-36.12
8	16737.25 AV	46.87	54	-7.13	-60.05	-55.78	6.01	-48.39

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

### Chain (0)

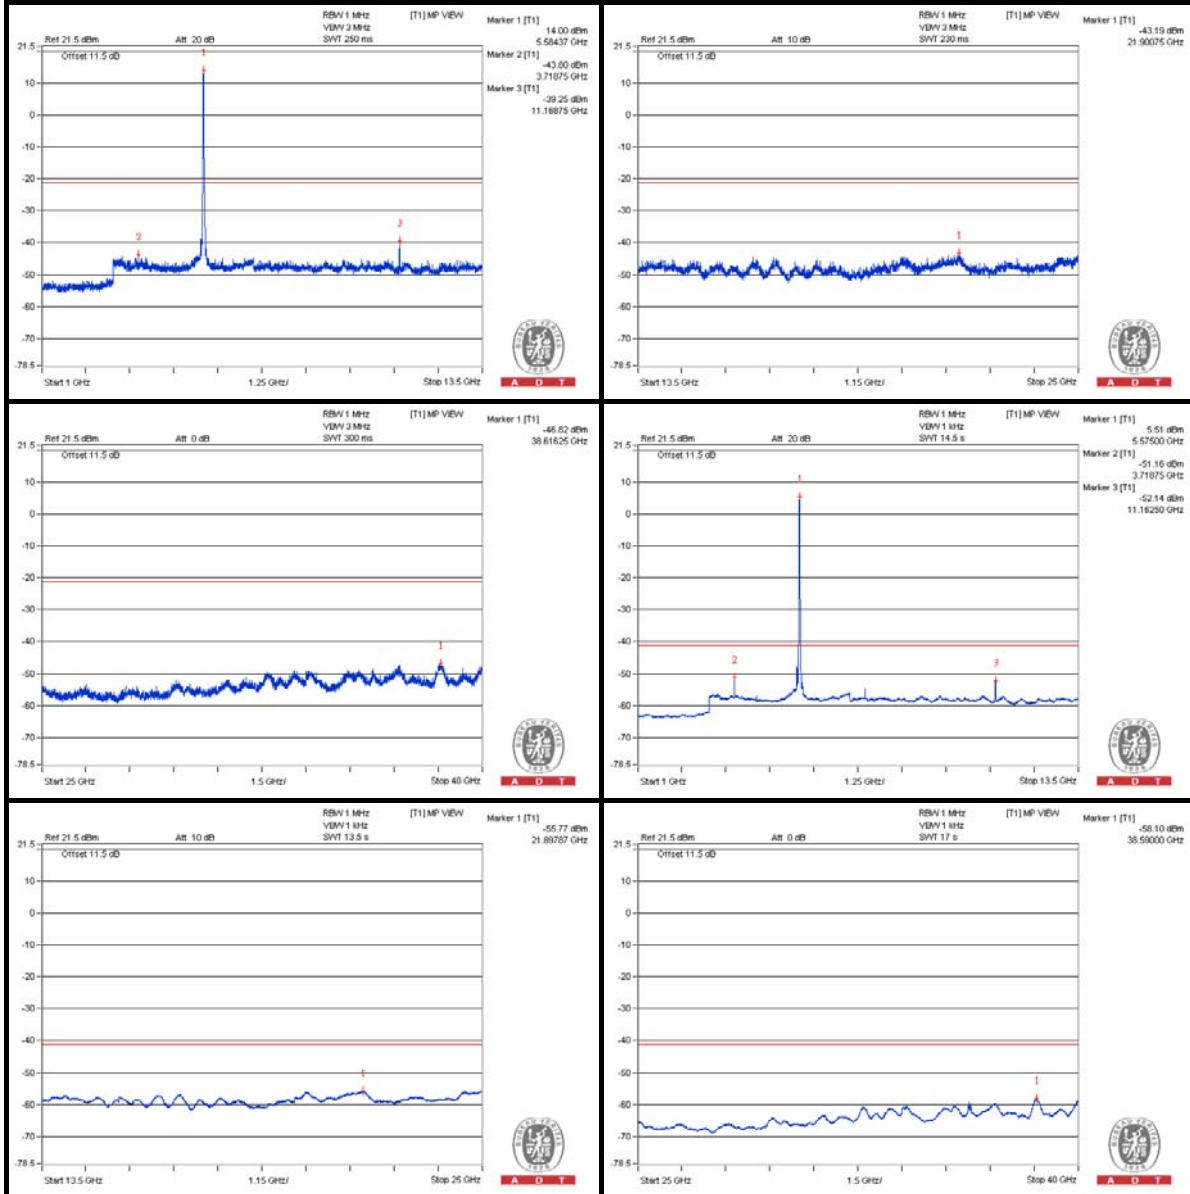

**Chain (1)**

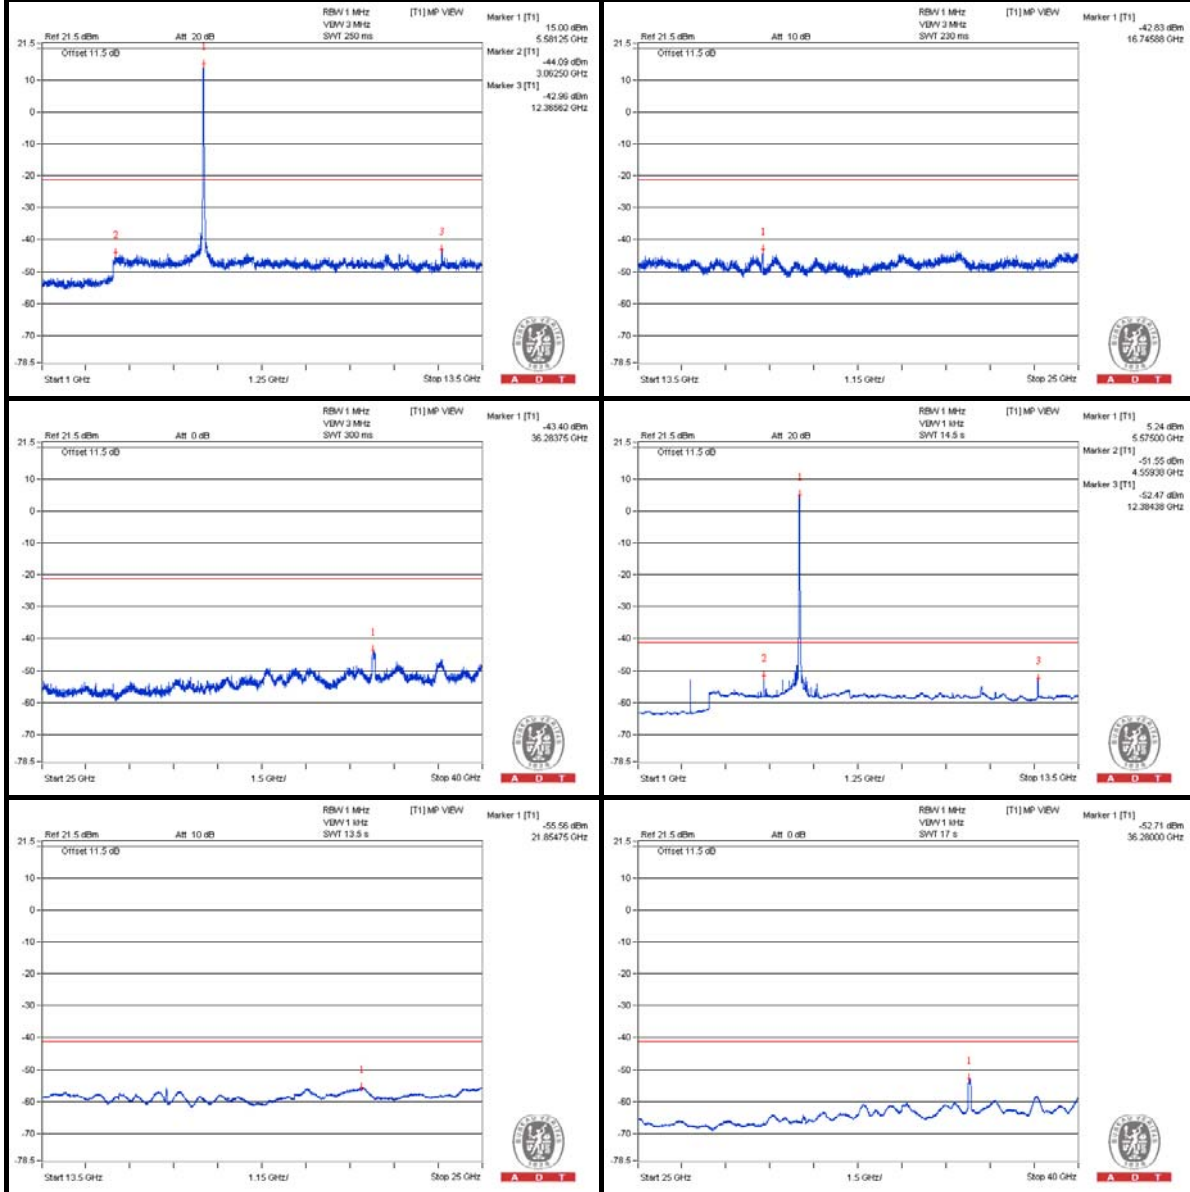



A D T

### 802.11a – Channel 132

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3771.875 PK	60.54	74	-13.46	-42.92	-44.76	6.01	-34.72
2	3771.875 AV	54.61	54	* 0.61	-47.29	-55.33	6.01	-40.65
3	7546.875 PK	57.41	74	-16.59	-46.47	-47.32	6.01	-37.85
4	7546.875 AV	50.08	54	-3.92	-52.51	-57.02	6.01	-45.18
5	11318.75 PK	59.94	74	-14.06	-44.77	-43.95	6.01	-35.32
6	11321.875 AV	48.87	54	-5.13	-54.9	-55.98	6.01	-46.39
7	16984.5 PK	58.93	74	-15.07	-46.91	-44.21	6.01	-36.33
8	16981.625 AV	47.59	54	-6.41	-57.92	-55.74	6.01	-47.67

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


\* The unwanted emission was verified and the test result was passed by radiated measurement.  
(Please refer APPENDIX A)






A D T

### Chain (0)

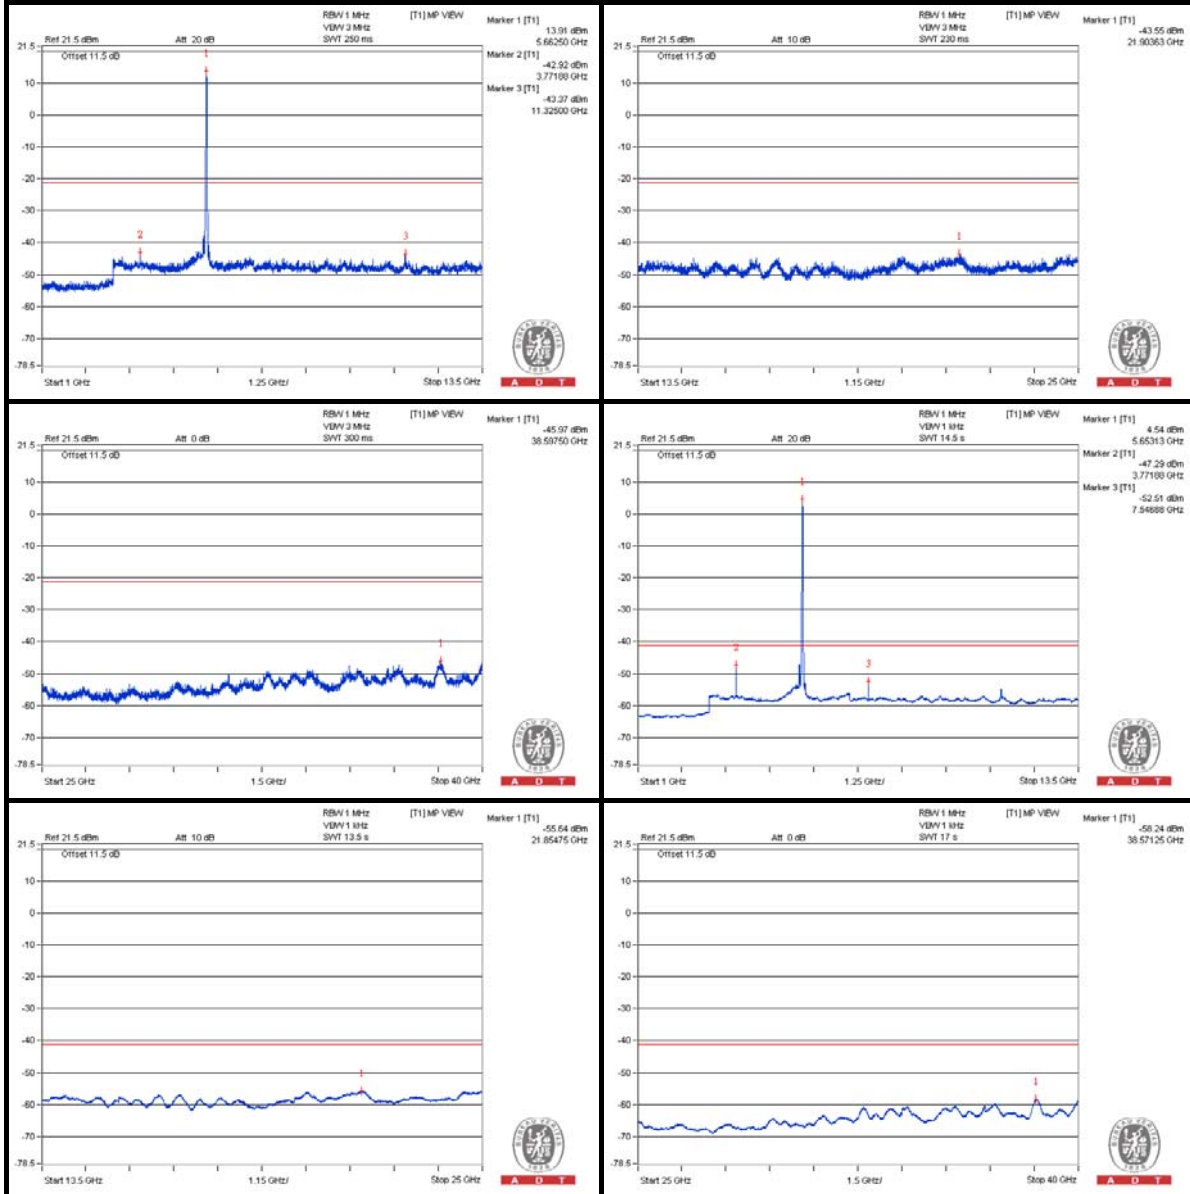

**Chain (1)**

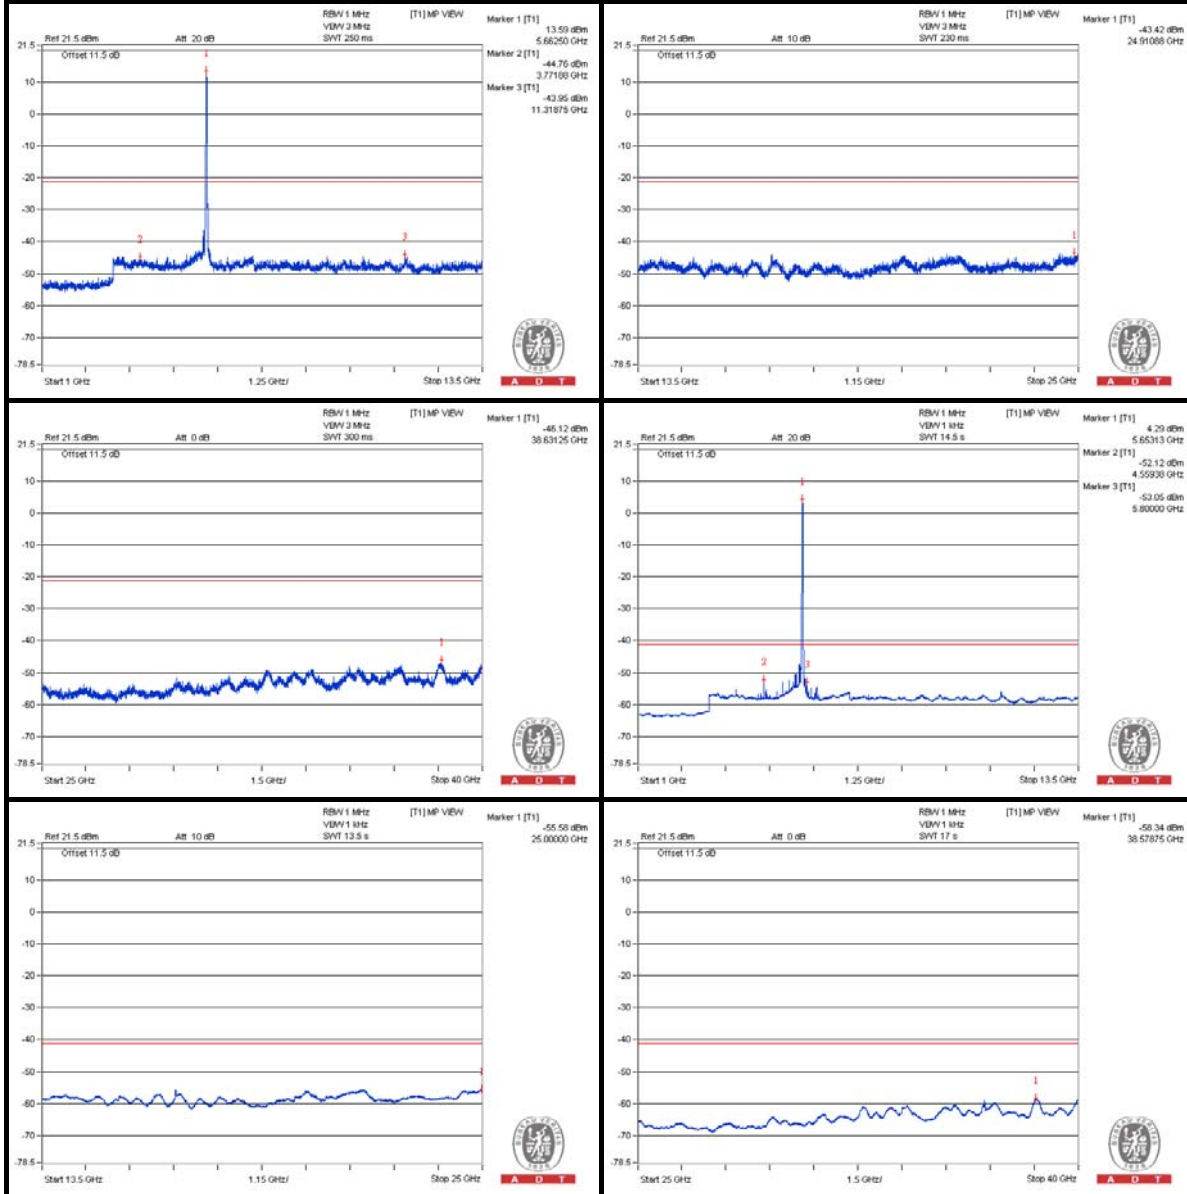



A D T

### 802.11a – Channel 140

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3800 PK	60.64	74	-13.36	-41.76	-47.02	6.01	-34.62
2	3800 AV	55.69	54	* 1.69	-46.07	-55.27	6.01	-39.57
3	7600 PK	57.66	74	-16.34	-46.1	-47.21	6.01	-37.6
4	7600 AV	49.95	54	-4.05	-52.84	-56.62	6.01	-45.31
5	11390.625 PK	57.85	74	-16.15	-47.15	-45.82	6.01	-37.41
6	11403.125 AV	47.18	54	-6.82	-57.28	-56.92	6.01	-48.08
7	17105.25 PK	58.24	74	-15.76	-45.57	-46.56	6.01	-37.02
8	17090.875 AV	47.44	54	-6.56	-56.88	-56.81	6.01	-47.82

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

\* The unwanted emission was verified and the test result was passed by radiated measurement.  
(Please refer APPENDIX A)




A D T

### Chain (0)

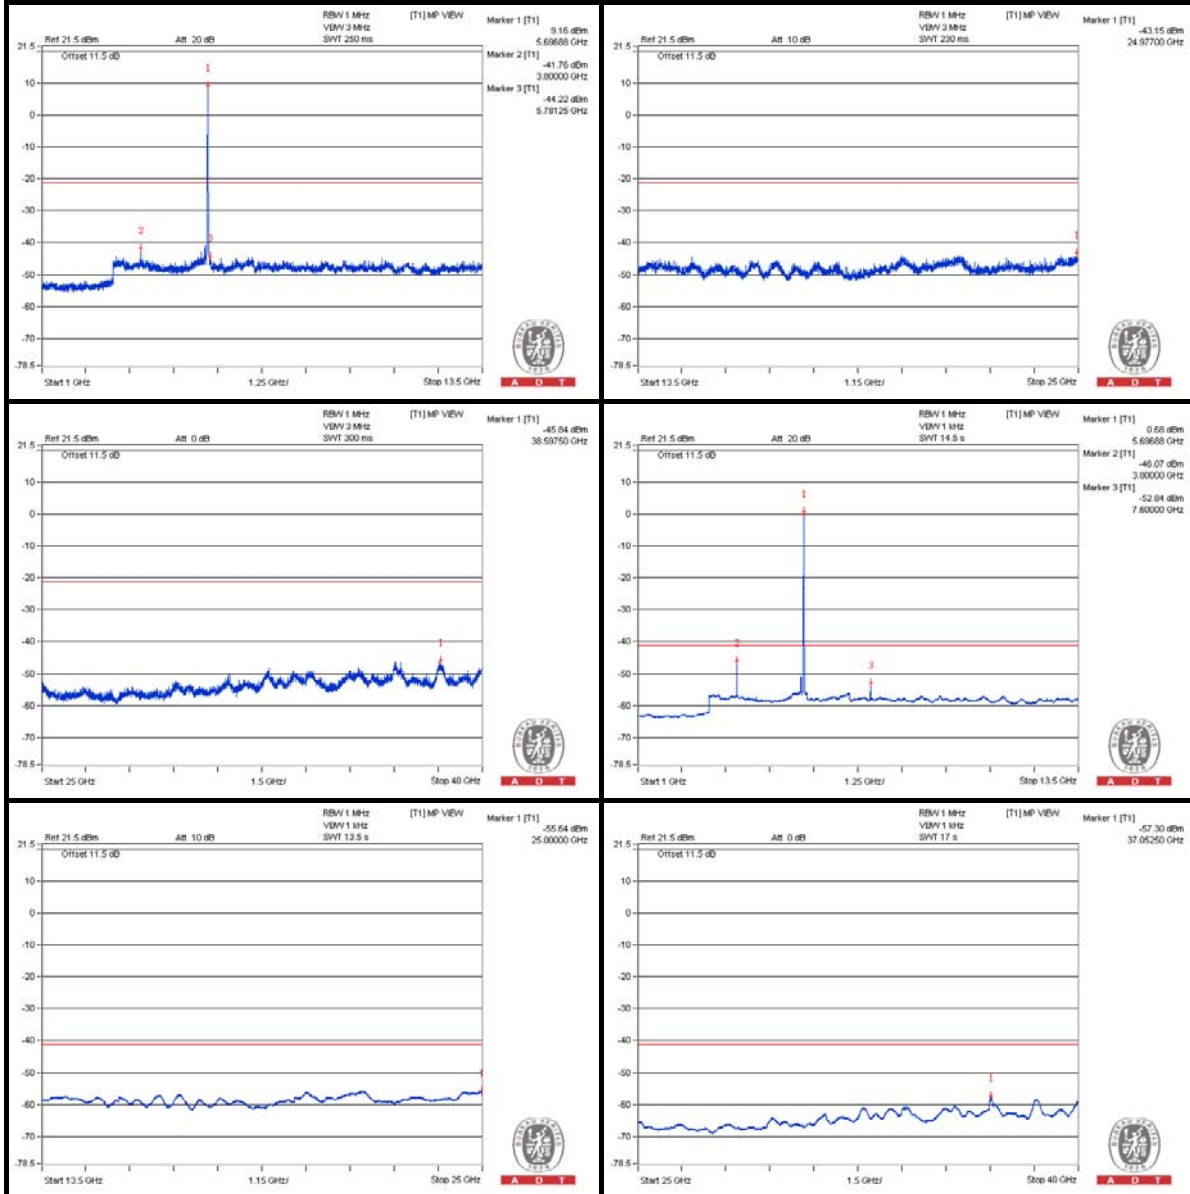

**Chain (1)**

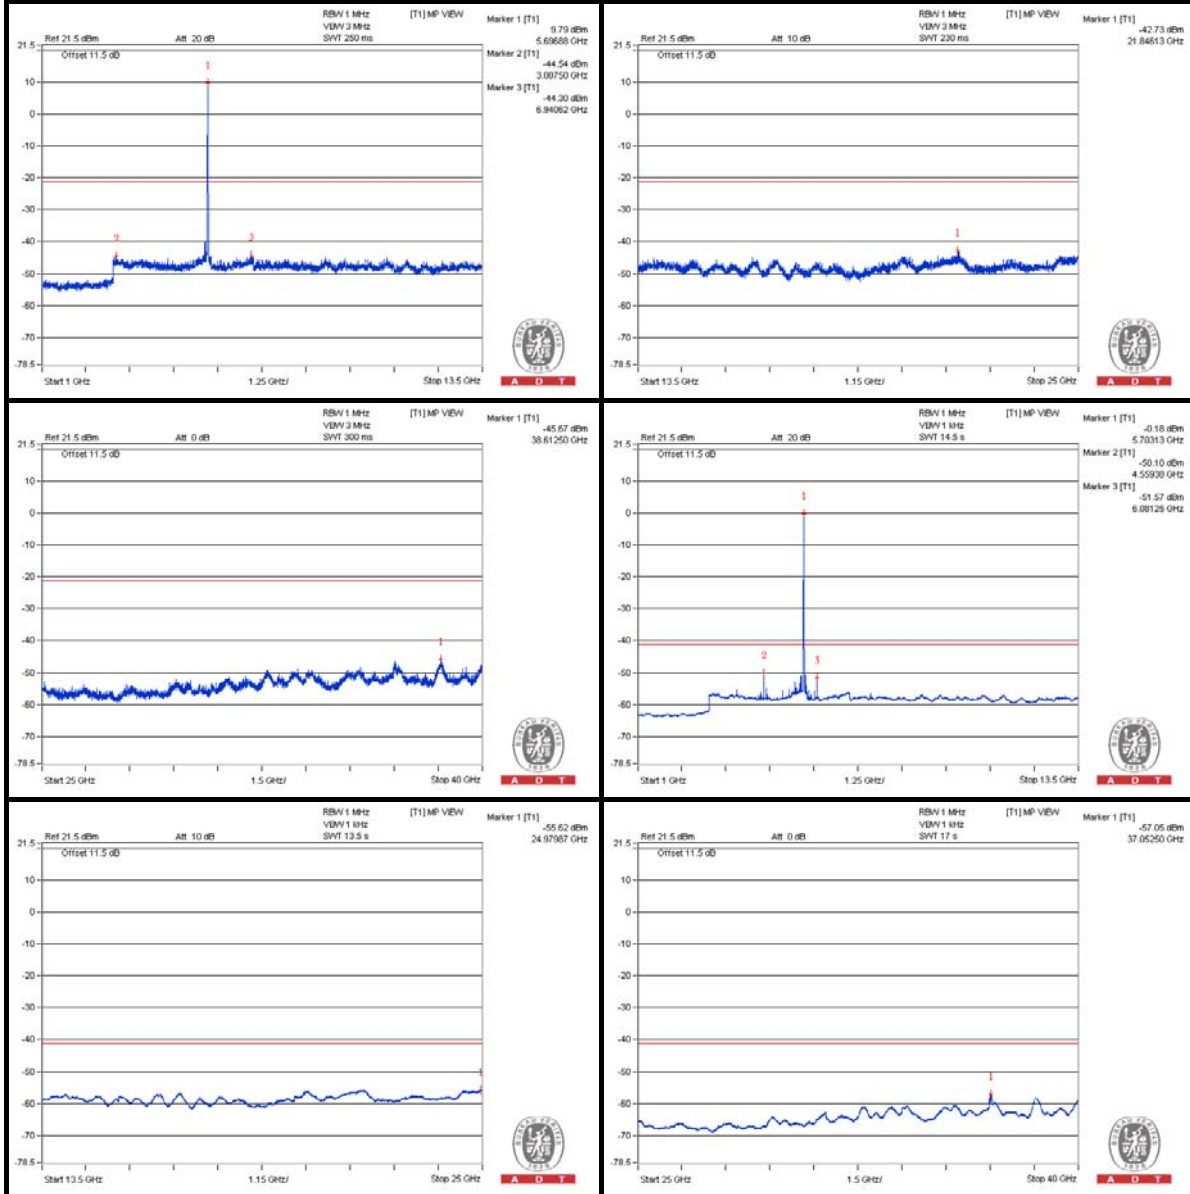

**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5725 PK	69.8	74	-4.2	-33.87	-35.18	6.01	-25.46
2	5760.2 AV	51.21	54	-2.79	-57.22	-50.99	6.01	-44.05

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

**Chain (0)**

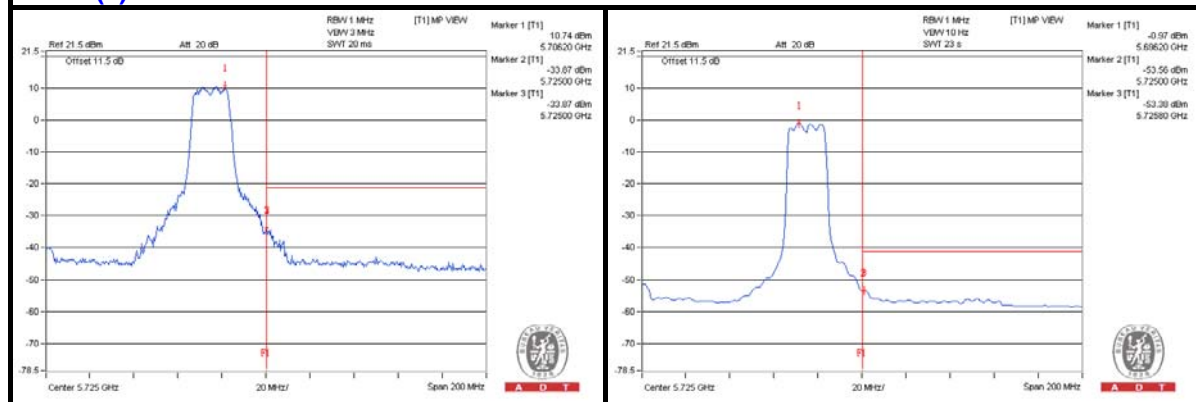

**Chain (1)**

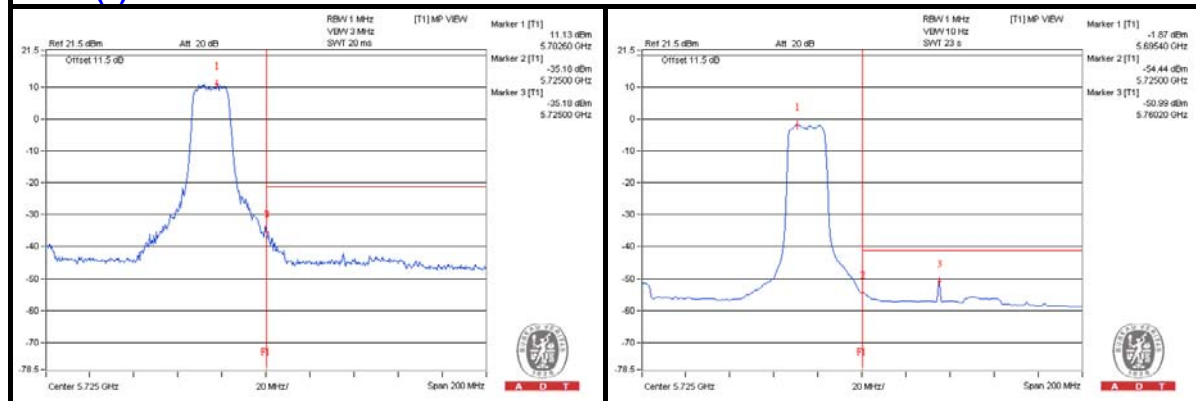



A D T

### 802.11n (HT20) – Channel 36

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3456.25 PK	58.58	74	-15.42	-44.95	-46.61	6.01	-36.68
2	3453.125 AV	47.41	54	-6.59	-56.03	-57.92	6.01	-47.85
3	6906.25 PK	58.78	74	-15.22	-44.81	-46.33	6.01	-36.48
4	6906.25 AV	47.93	54	-6.07	-56.27	-56.43	6.01	-47.33
5	10353.125 PK	57.39	74	-16.61	-46.42	-47.42	6.01	-37.87
6	10362.5 AV	46.61	54	-7.39	-57.83	-57.52	6.01	-48.65
7	15538.375 PK	57.43	74	-16.57	-48.23	-45.81	6.01	-37.83
8	15538.375 AV	46.51	54	-7.49	-57.78	-57.76	6.01	-48.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

### Chain (0)

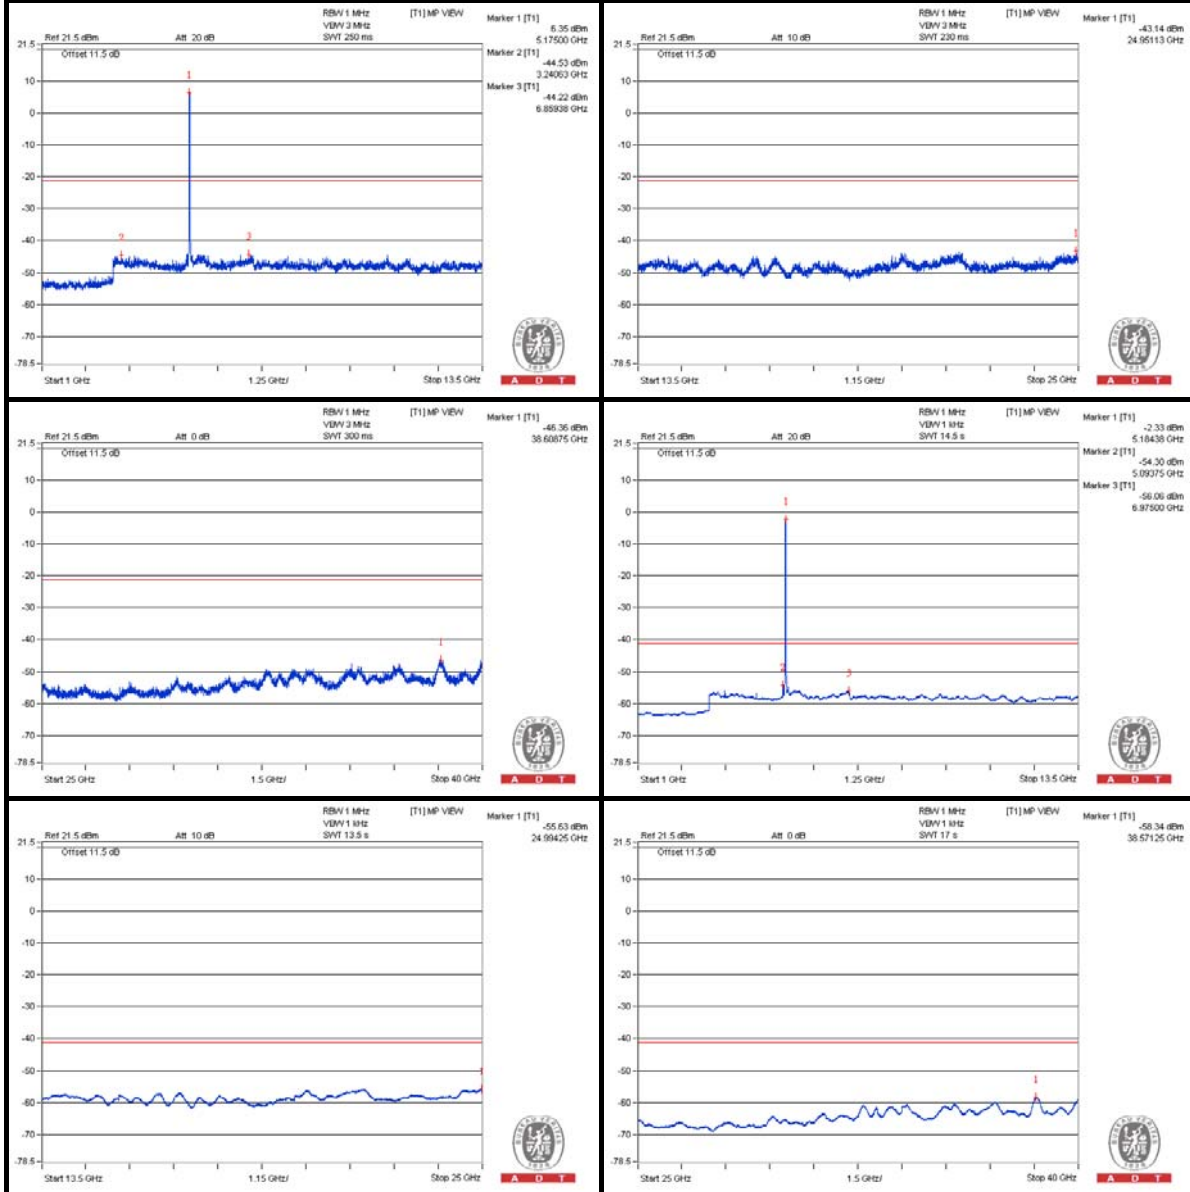



**Chain (1)**

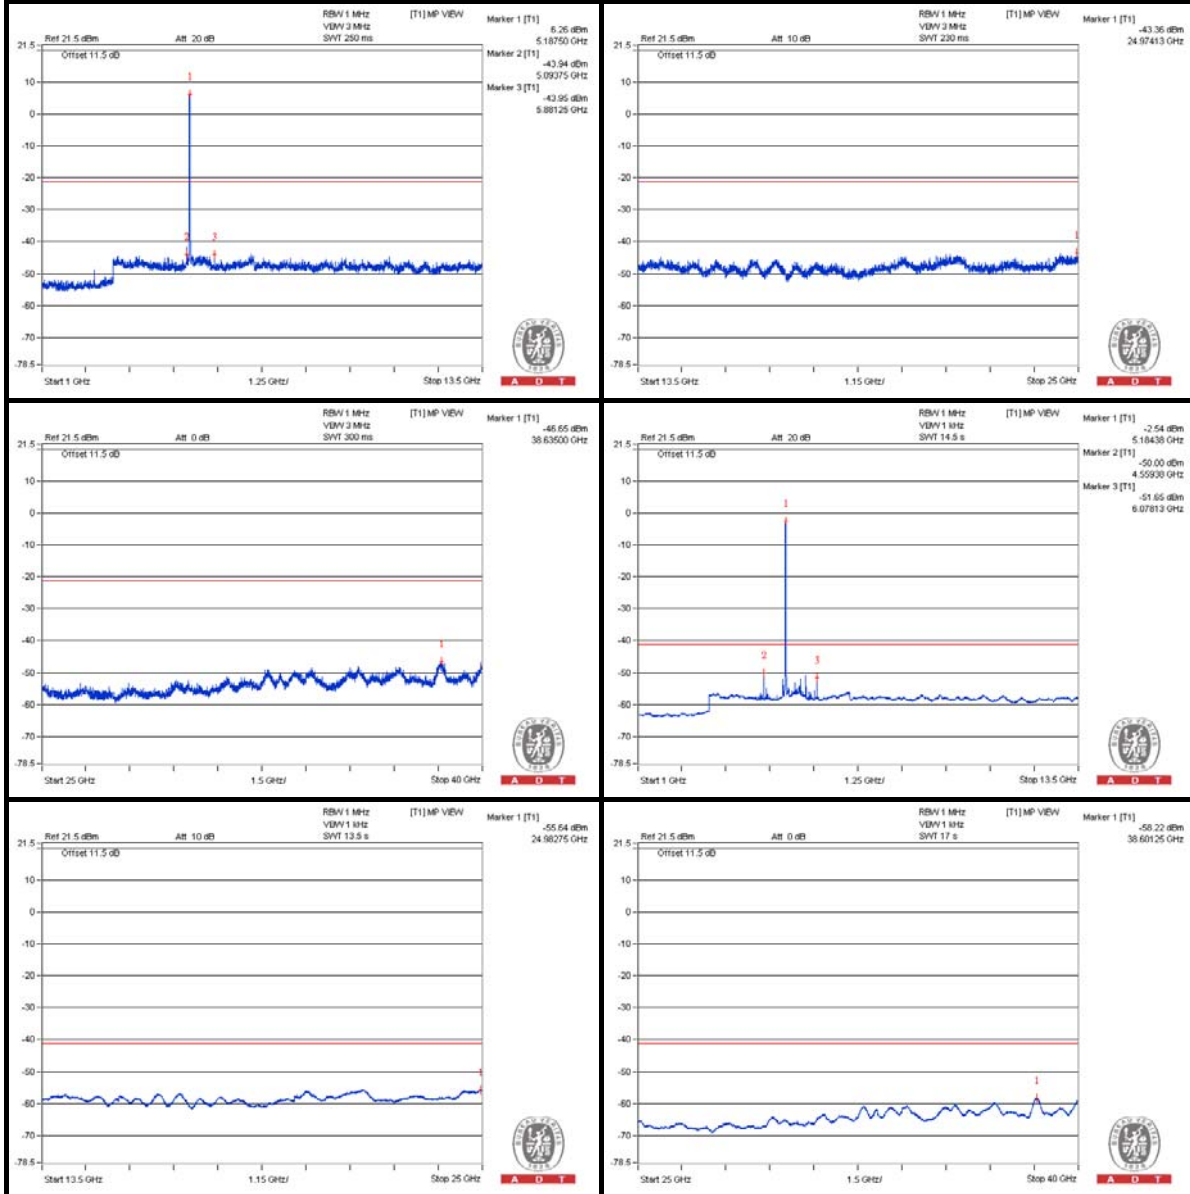


**Bandedge table**

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5103.6 PK	62.51	74	-11.49	-42.44	-41.19	6.01	-32.75
2	5104 AV	50.96	54	-3.04	-54.19	-52.59	6.01	-44.3


Note :

Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.

**Chain (0)**

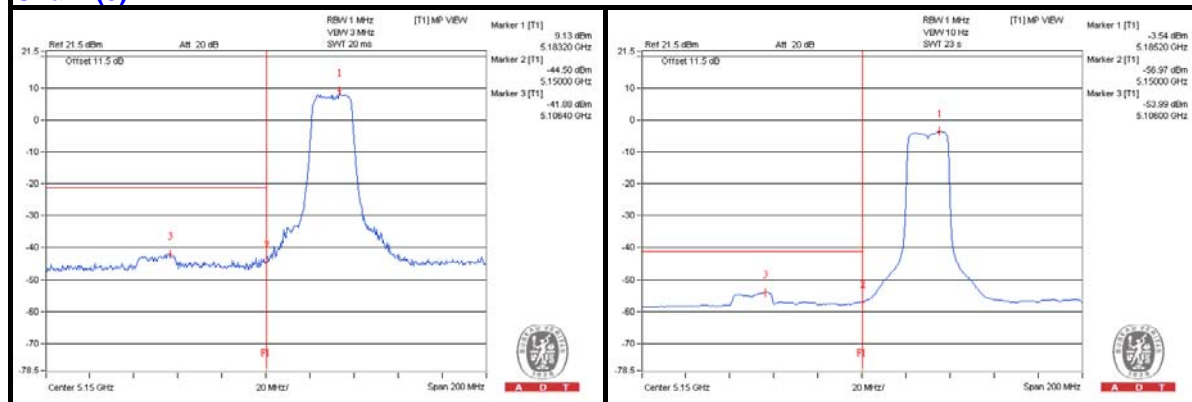

**Chain (1)**

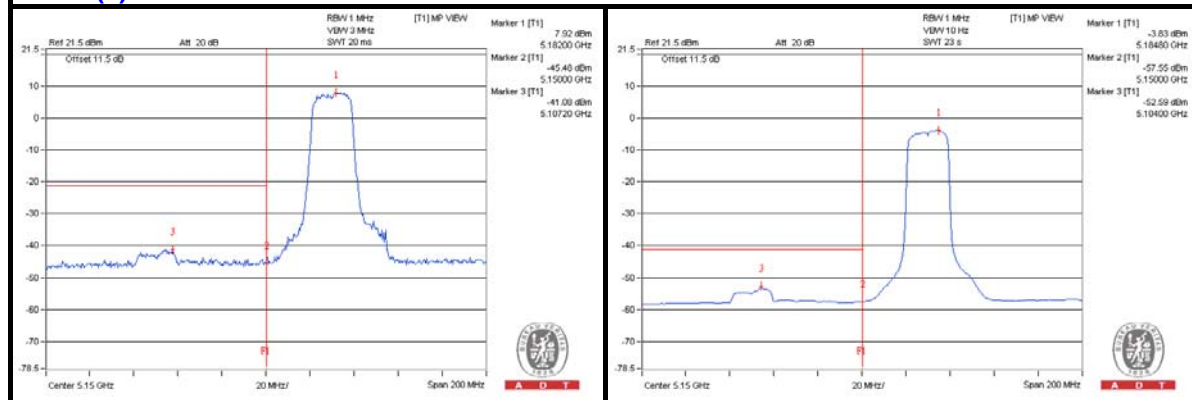



A D T

### 802.11n (HT20) – Channel 40

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3471.875 PK	57.15	74	-16.85	-46.55	-47.81	6.01	-38.11
2	3465.625 AV	47.54	54	-6.46	-56.01	-57.62	6.01	-47.72
3	6928.125 PK	58.76	74	-15.24	-45.4	-45.65	6.01	-36.5
4	6925 AV	47.81	54	-6.19	-56.48	-56.46	6.01	-47.45
5	10403.125 PK	57.26	74	-16.74	-47.29	-46.76	6.01	-38
6	10403.125 AV	46.51	54	-7.49	-57.82	-57.72	6.01	-48.75
7	15598.75 PK	57.51	74	-16.49	-47.11	-46.46	6.01	-37.75
8	15590.125 AV	46.15	54	-7.85	-58.25	-58.02	6.01	-49.11

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

### Chain (0)

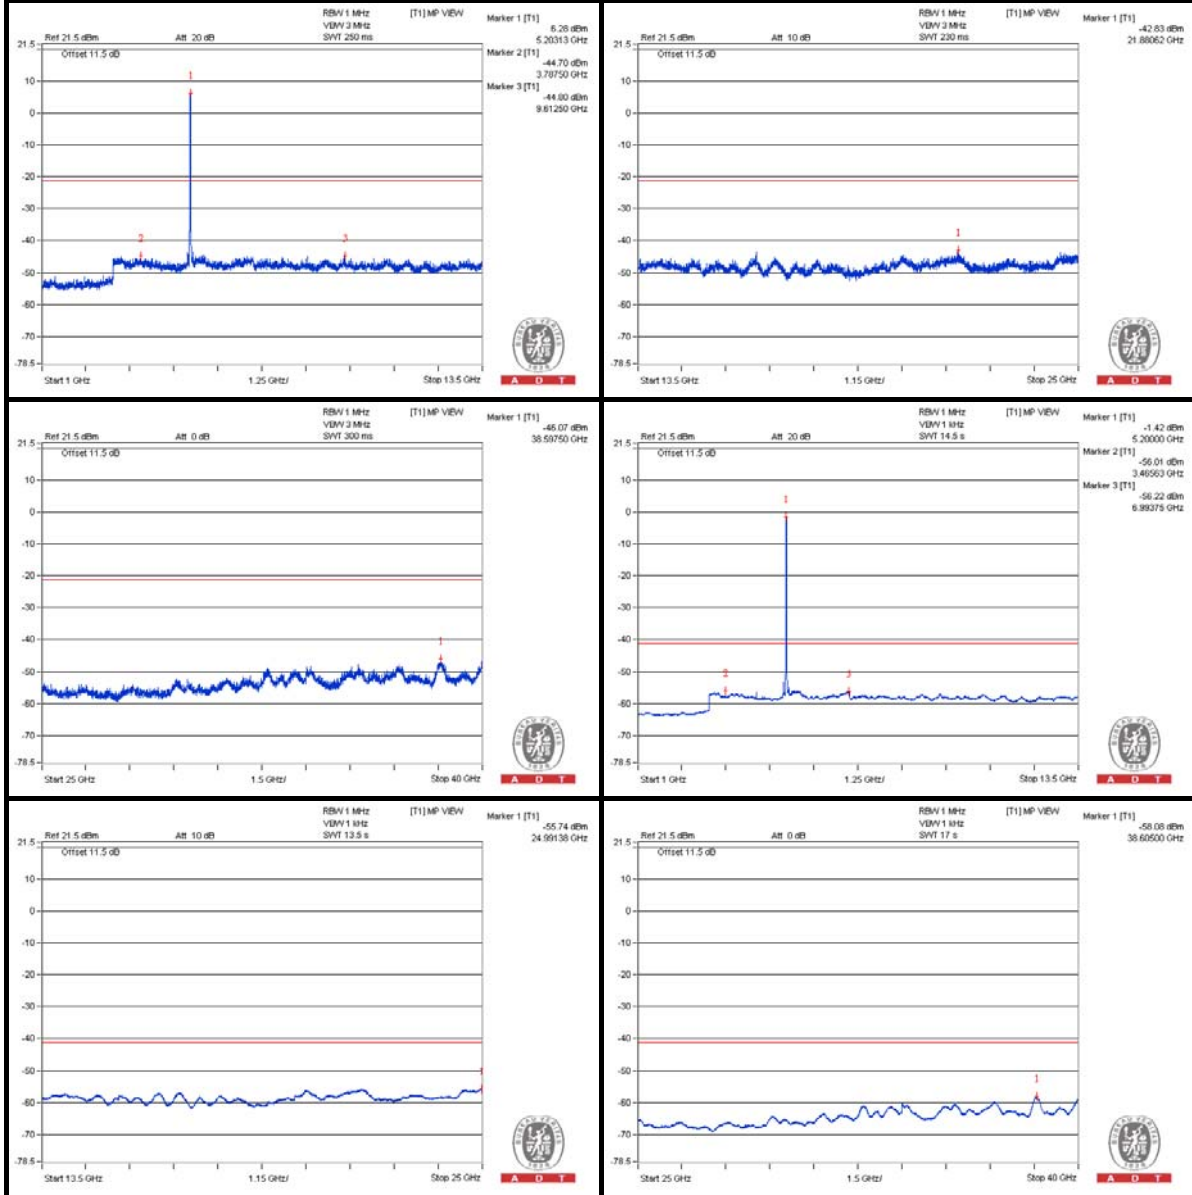

**Chain (1)**

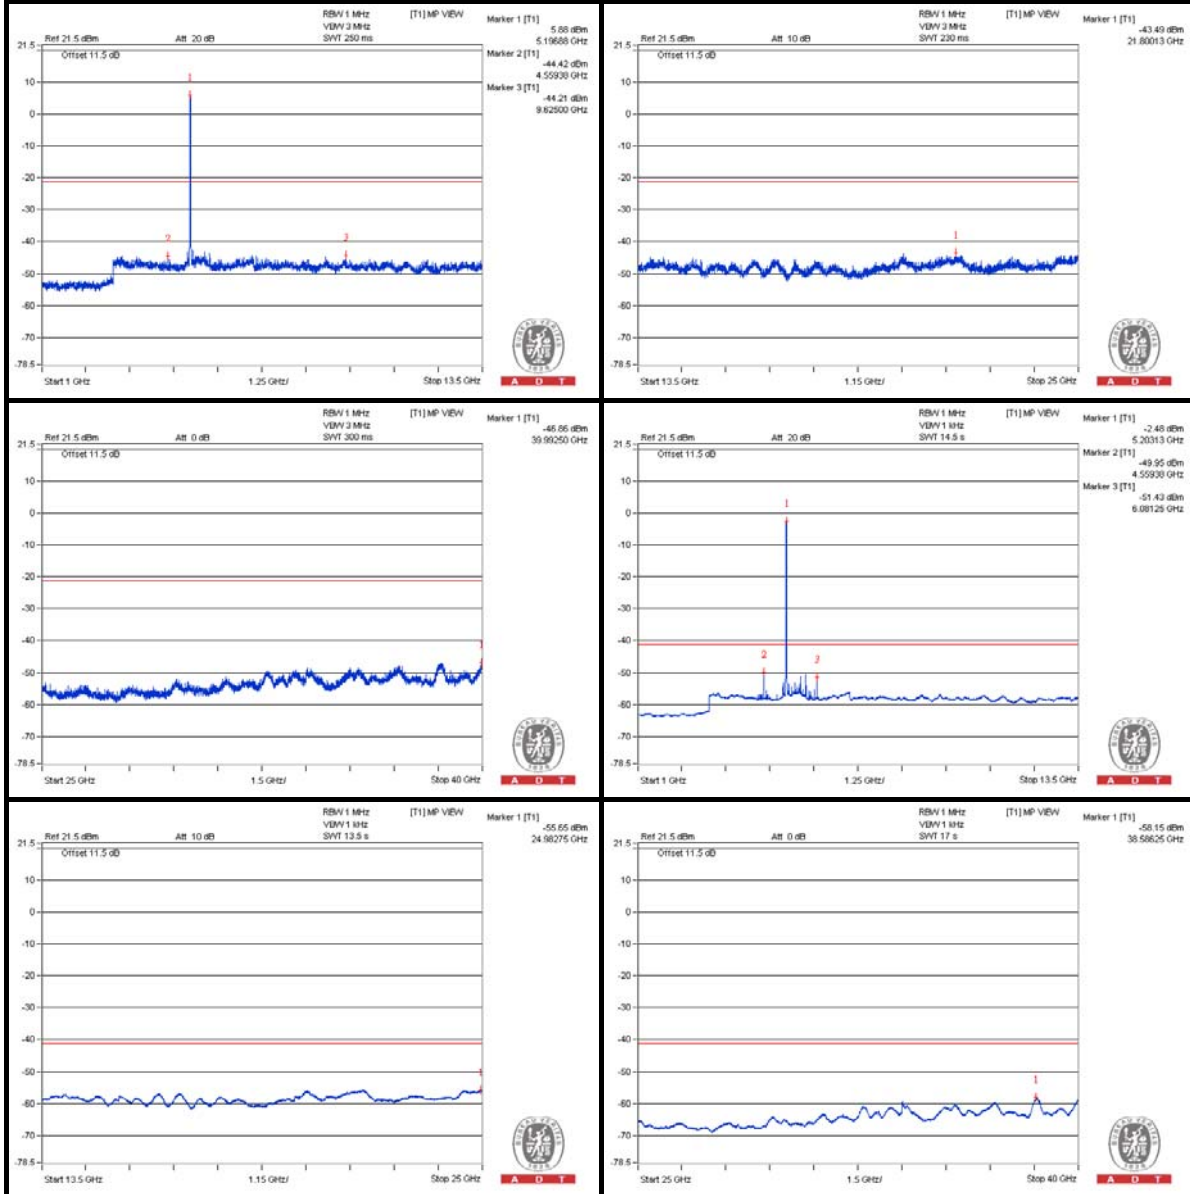



A D T

### 802.11n (HT20) - Channel 48

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3487.5 PK	56.69	74	-17.31	-48.05	-47.17	6.01	-38.57
2	3493.75 AV	47.22	54	-6.78	-56.22	-58.1	6.01	-48.04
3	6984.375 PK	59.38	74	-14.62	-45.05	-44.76	6.01	-35.88
4	6987.5 AV	48.06	54	-5.94	-56.12	-56.32	6.01	-47.2
5	10478.125 PK	57.09	74	-16.91	-46.42	-48.13	6.01	-38.17
6	10478.125 AV	46.27	54	-7.73	-57.64	-58.42	6.01	-48.99
7	15719.5 PK	56.46	74	-17.54	-48.25	-47.43	6.01	-38.8
8	15728.125 AV	45.27	54	-8.73	-59.15	-58.88	6.01	-49.99


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.




A D T

### Chain (0)

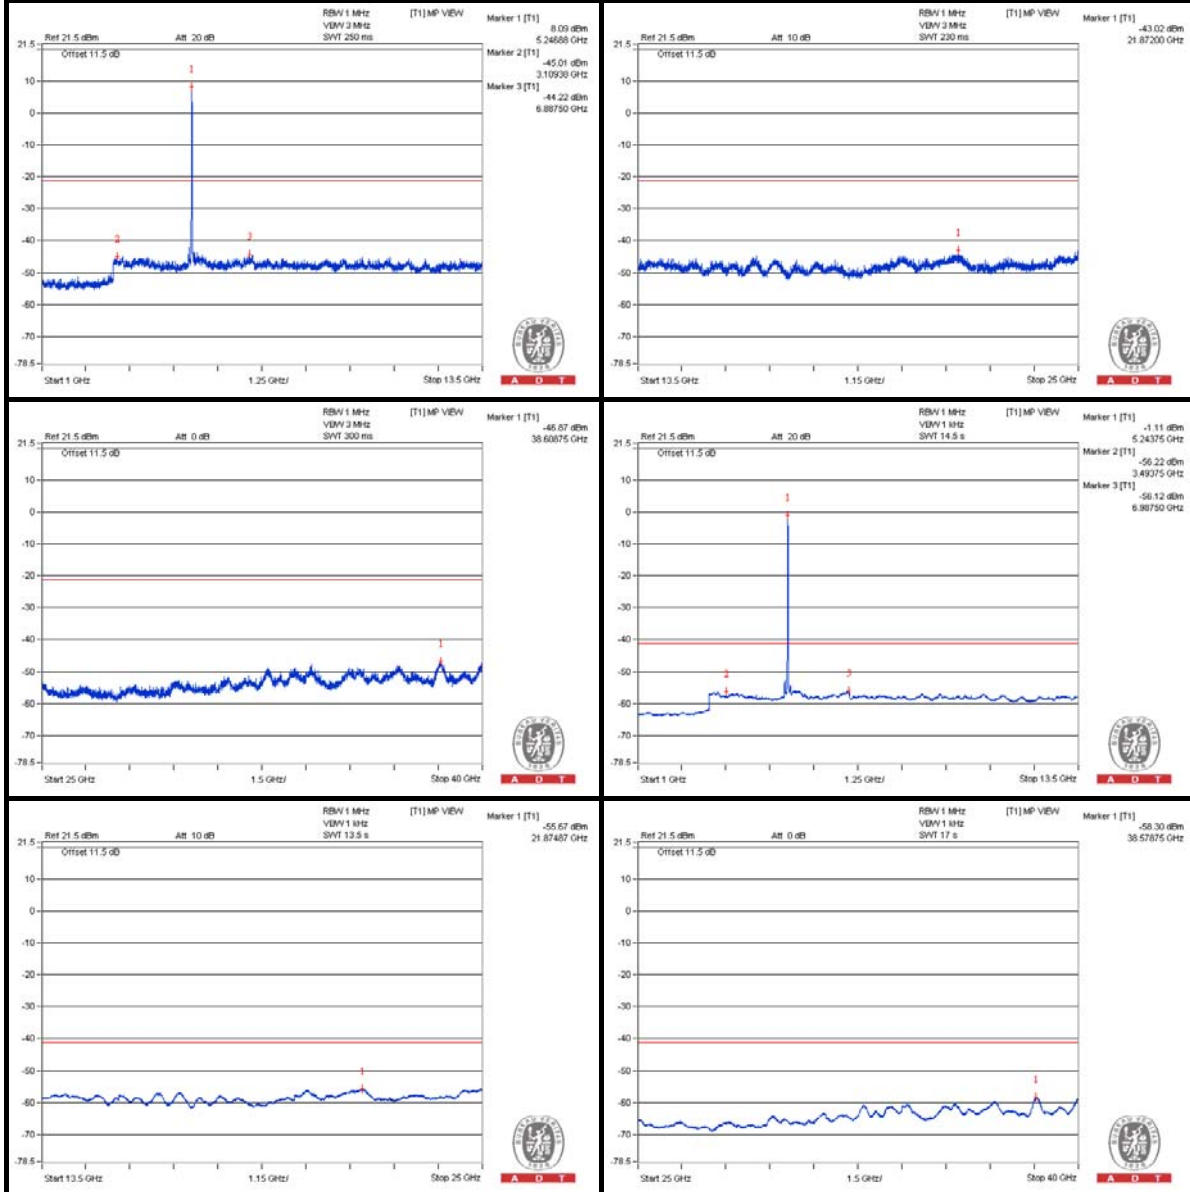

**Chain (1)**

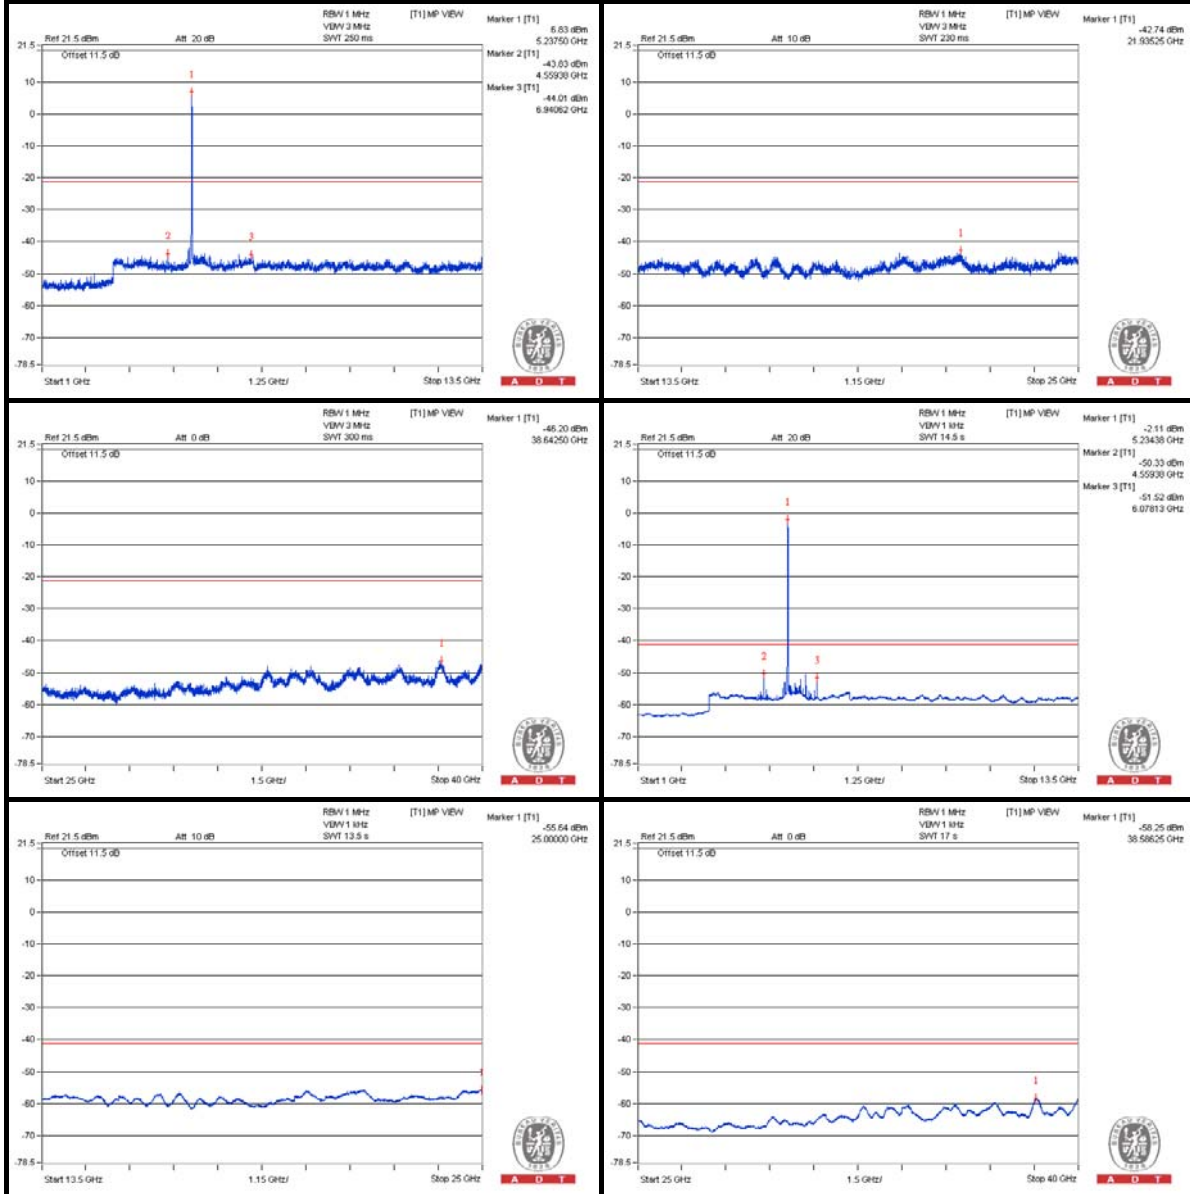





A D T

### 802.11n (HT20) – Channel 52

#### Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3515.625 PK	57.32	74	-16.68	-46.63	-47.32	6.01	-37.94
2	3506.25 AV	47.04	54	-6.96	-56.76	-57.79	6.01	-48.22
3	7006.25 PK	58.66	74	-15.34	-44.75	-46.72	6.01	-36.6
4	7006.25 AV	47.16	54	-6.84	-57.07	-57.18	6.01	-48.1
5	10515.625 PK	61.97	74	-12.03	-42.47	-42.15	6.01	-33.29
6	10521.875 AV	49.8	54	-4.2	-55.22	-53.85	6.01	-45.46
7	15779.875 PK	56.25	74	-17.75	-48.72	-47.44	6.01	-39.01
8	15782.75 AV	45.85	54	-8.15	-58.92	-57.99	6.01	-49.41

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain (0)

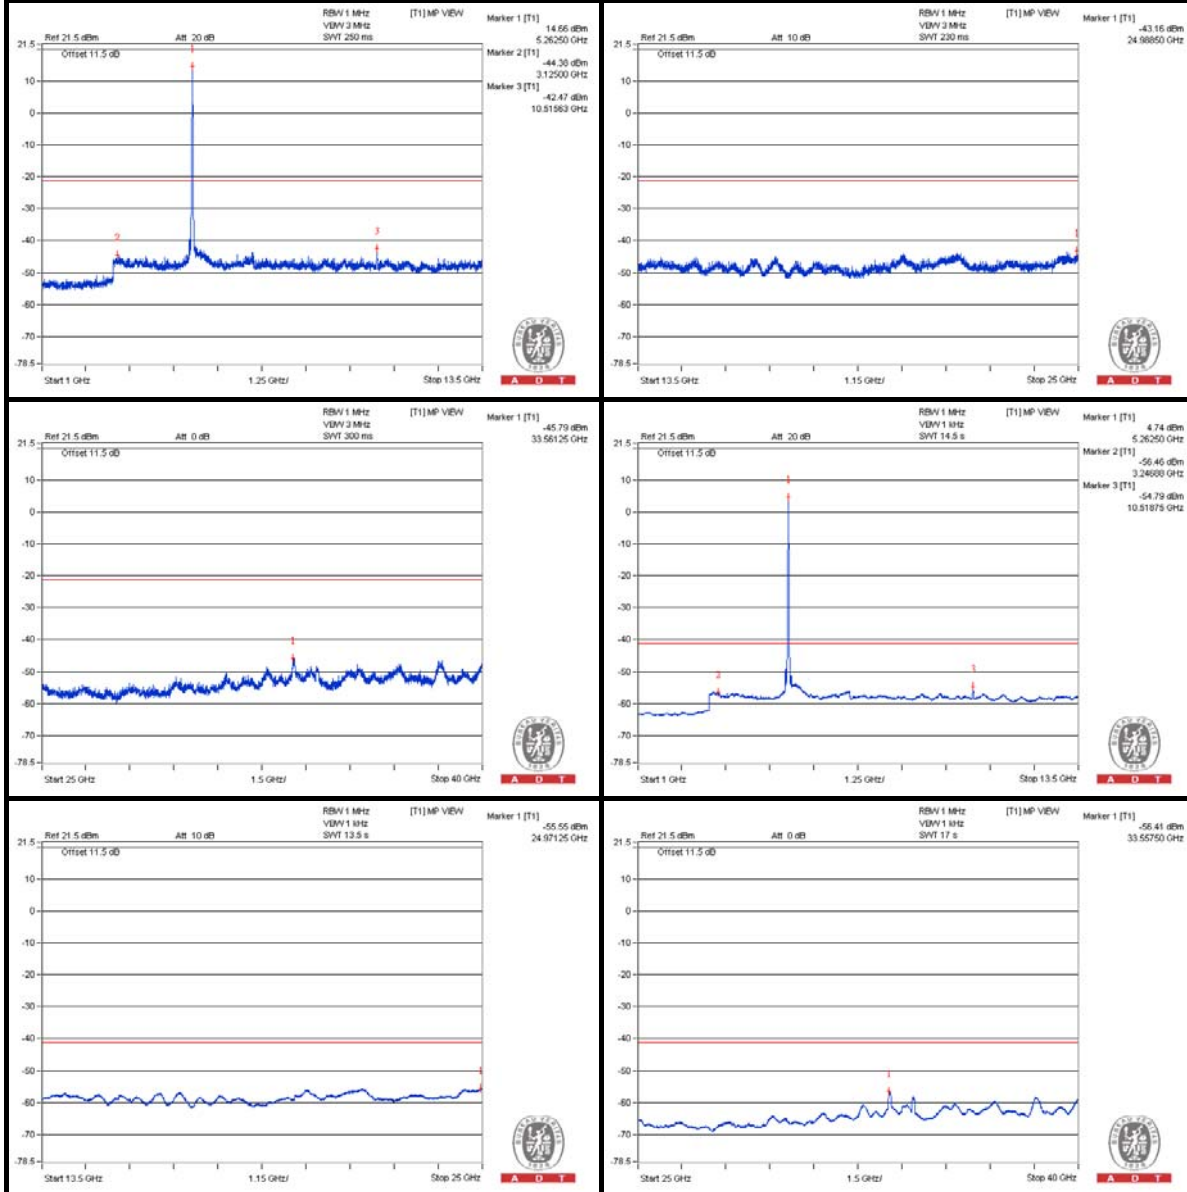

**Chain (1)**

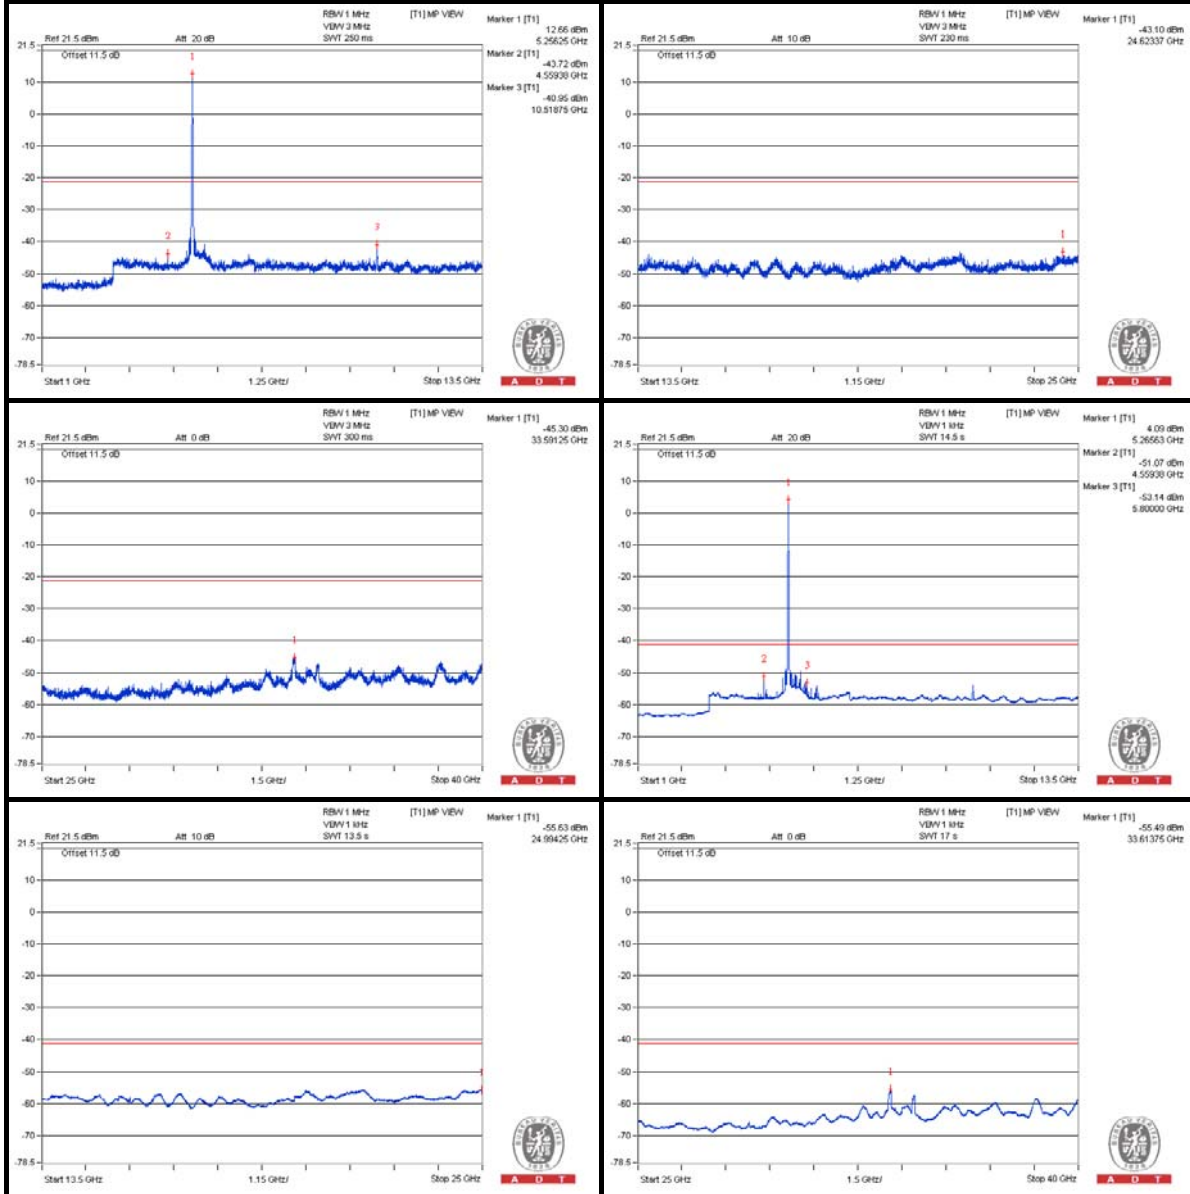



A D T

### 802.11n (HT20) – Channel 60

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3540.625 PK	57.43	74	-16.57	-47.24	-46.5	6.01	-37.83
2	3531.25 AV	47.12	54	-6.88	-56.5	-57.95	6.01	-48.14
3	7065.625 PK	57.52	74	-16.48	-48.25	-45.66	6.01	-37.74
4	7068.75 AV	45.96	54	-8.04	-58.51	-58.13	6.01	-49.3
5	10596.875 PK	60.88	74	-13.12	-44.39	-42.6	6.01	-34.38
6	10600 AV	48.78	54	-5.22	-55.85	-55.17	6.01	-46.48
7	15894.875 PK	58.26	74	-15.74	-47.42	-44.97	6.01	-37
8	15897.75 AV	46.9	54	-7.1	-57.84	-56.97	6.01	-48.36

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

### Chain (0)

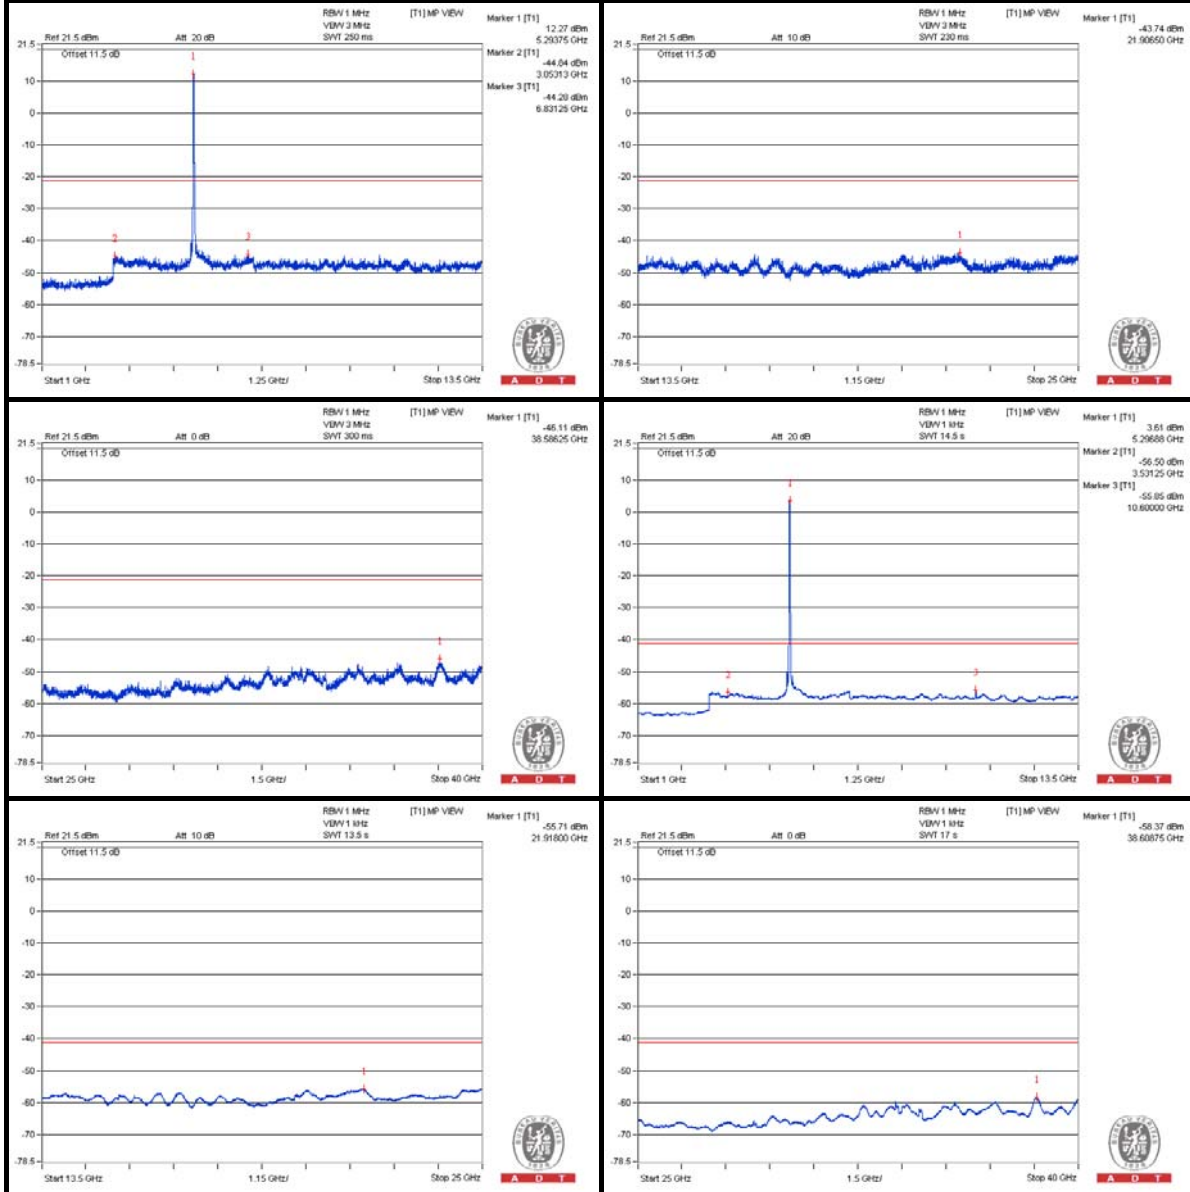

**Chain (1)**

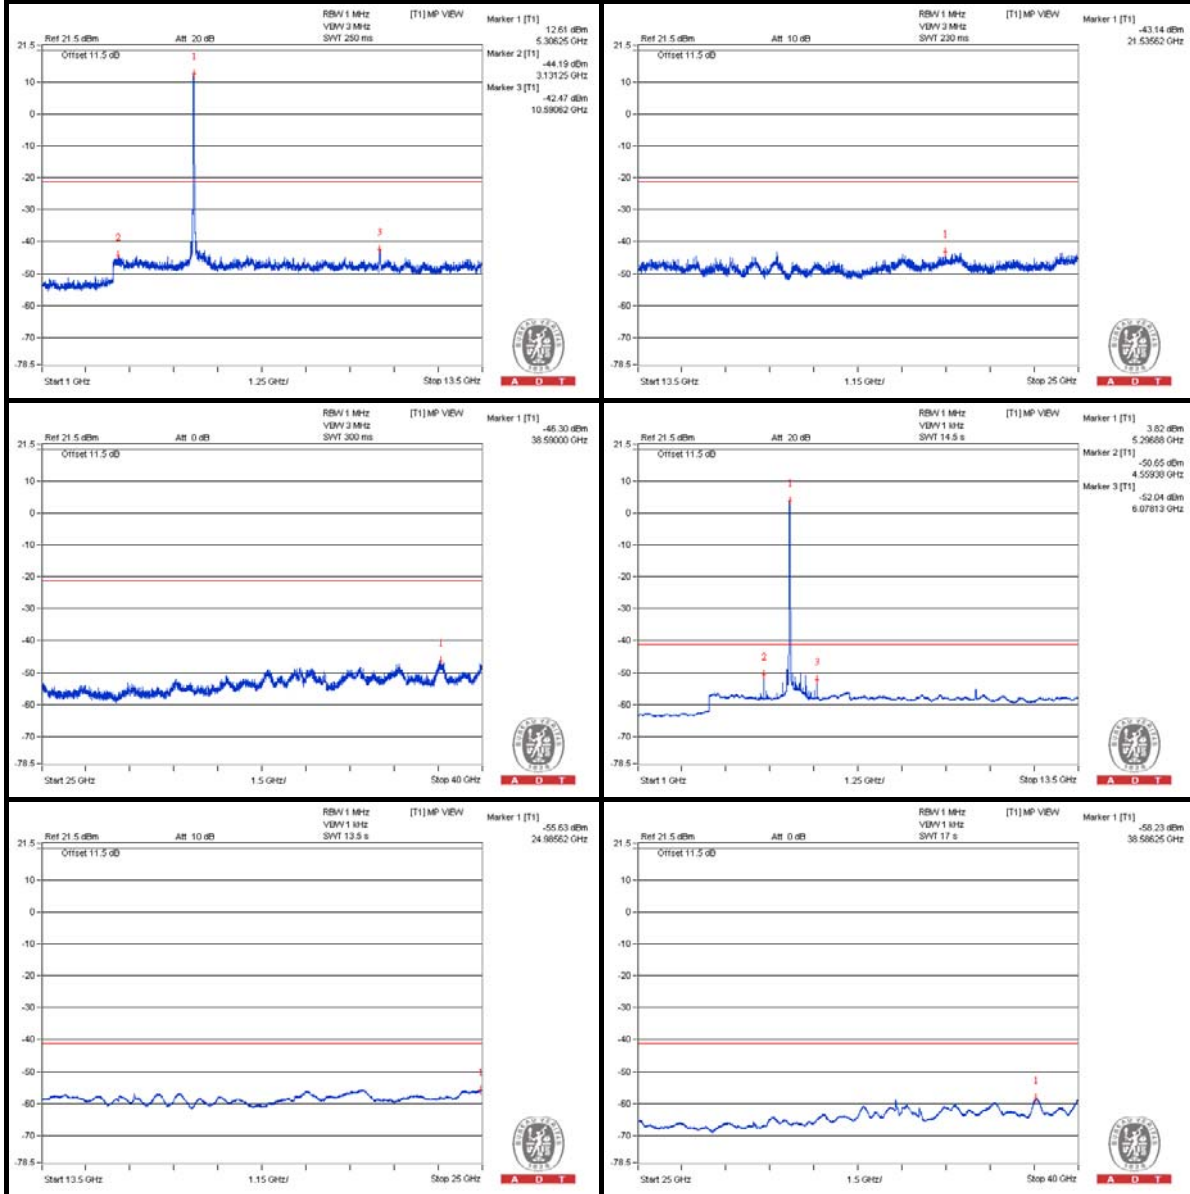



A D T

### 802.11n (HT20) – Channel 64

#### Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3556.25 PK	57.54	74	-16.46	-46.55	-46.94	6.01	-37.72
2	3546.875 AV	47.79	54	-6.21	-55.45	-57.87	6.01	-47.47
3	7100 PK	58.51	74	-15.49	-47.76	-44.41	6.01	-36.75
4	7093.75 AV	46.3	54	-7.7	-58.21	-57.76	6.01	-48.96
5	10634.375 PK	57.98	74	-16.02	-48.36	-44.91	6.01	-37.28
6	10640.625 AV	47.27	54	-6.73	-57.33	-56.71	6.01	-47.99
7	15966.75 PK	57.05	74	-16.95	-47.08	-47.38	6.01	-38.21
8	15952.375 AV	46.04	54	-7.96	-58.17	-58.32	6.01	-49.22

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

**Chain (0)**

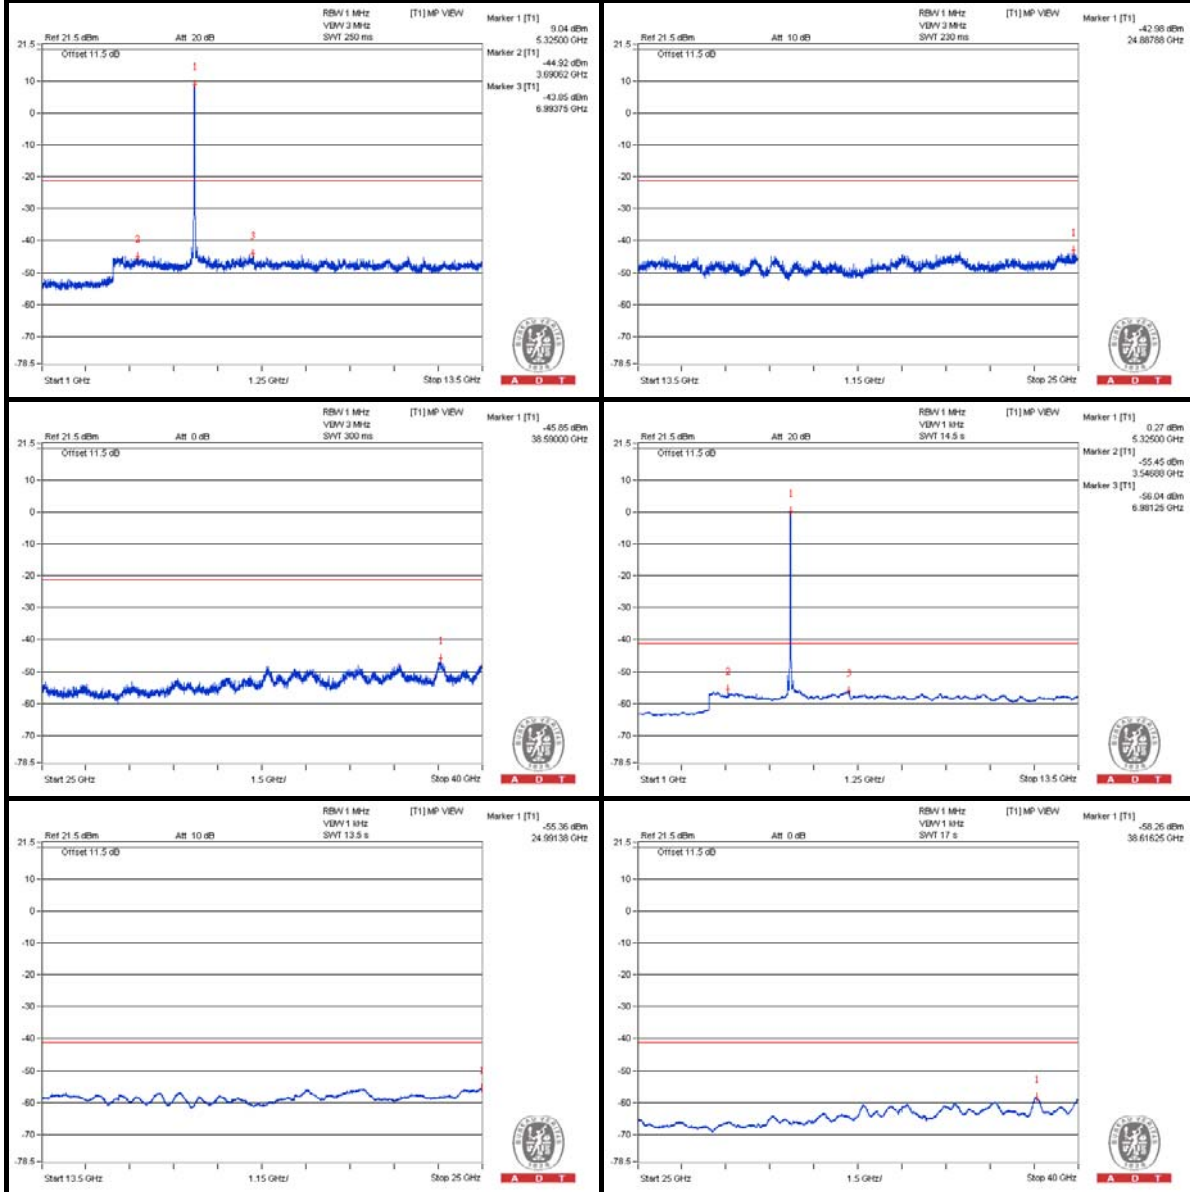



**Chain (1)**

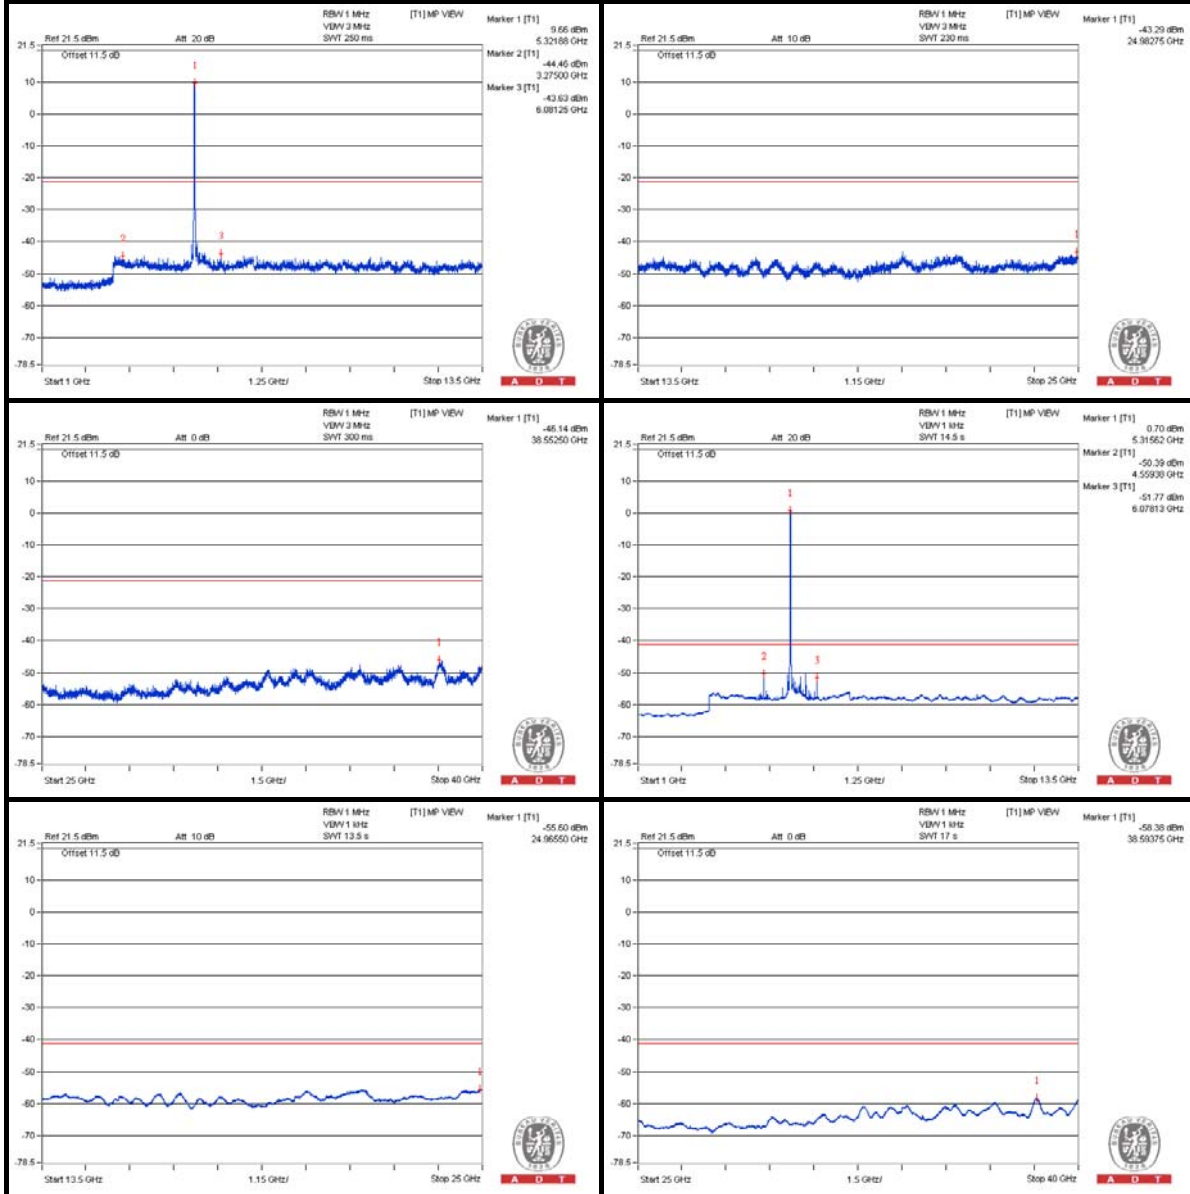

**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350 PK	69.56	74	-4.44	-33.48	-36.46	6.01	-25.7
2	5396 AV	51.85	54	-2.15	-52.92	-51.99	6.01	-43.41

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

**Chain (0)**

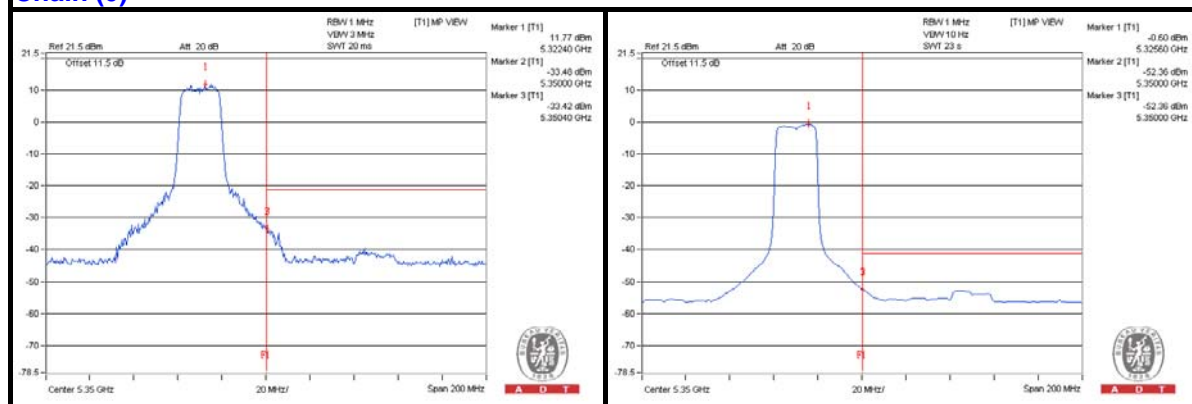

**Chain (1)**

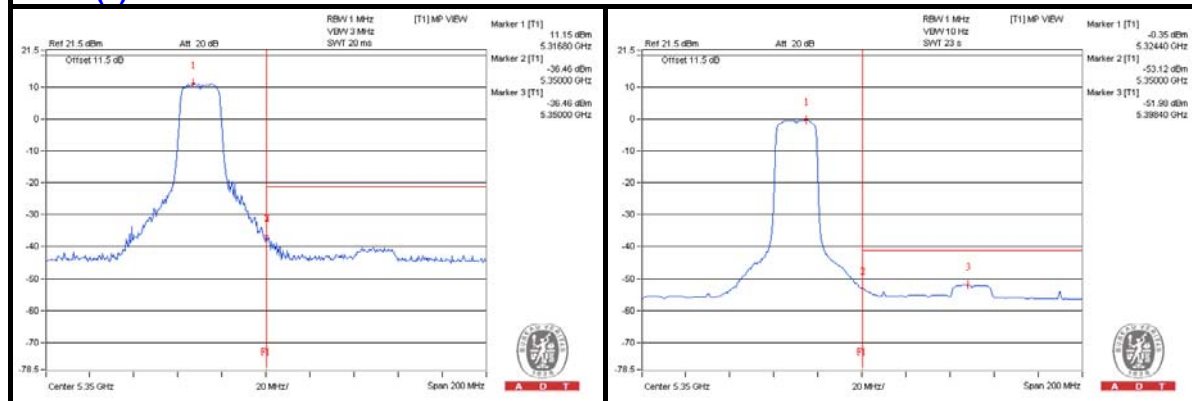



A D T

### 802.11n (HT20) – Channel 100

#### Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3665.625 PK	60.13	74	-13.87	-43.78	-44.55	6.01	-35.13
2	3665.625 AV	50.7	54	-3.3	-52.57	-54.9	6.01	-44.56
3	7337.5 PK	57.9	74	-16.1	-45.83	-47.01	6.01	-37.36
4	7334.375 AV	47.15	54	-6.85	-56.69	-57.62	6.01	-48.11
5	11009.375 PK	57.62	74	-16.38	-47.1	-46.27	6.01	-37.64
6	11000 AV	46.44	54	-7.56	-57.74	-57.95	6.01	-48.82
7	16495.75 PK	58.92	74	-15.08	-46.13	-44.7	6.01	-36.34
8	16495.75 AV	46.98	54	-7.02	-57.36	-57.24	6.01	-48.28

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


Chain (0)

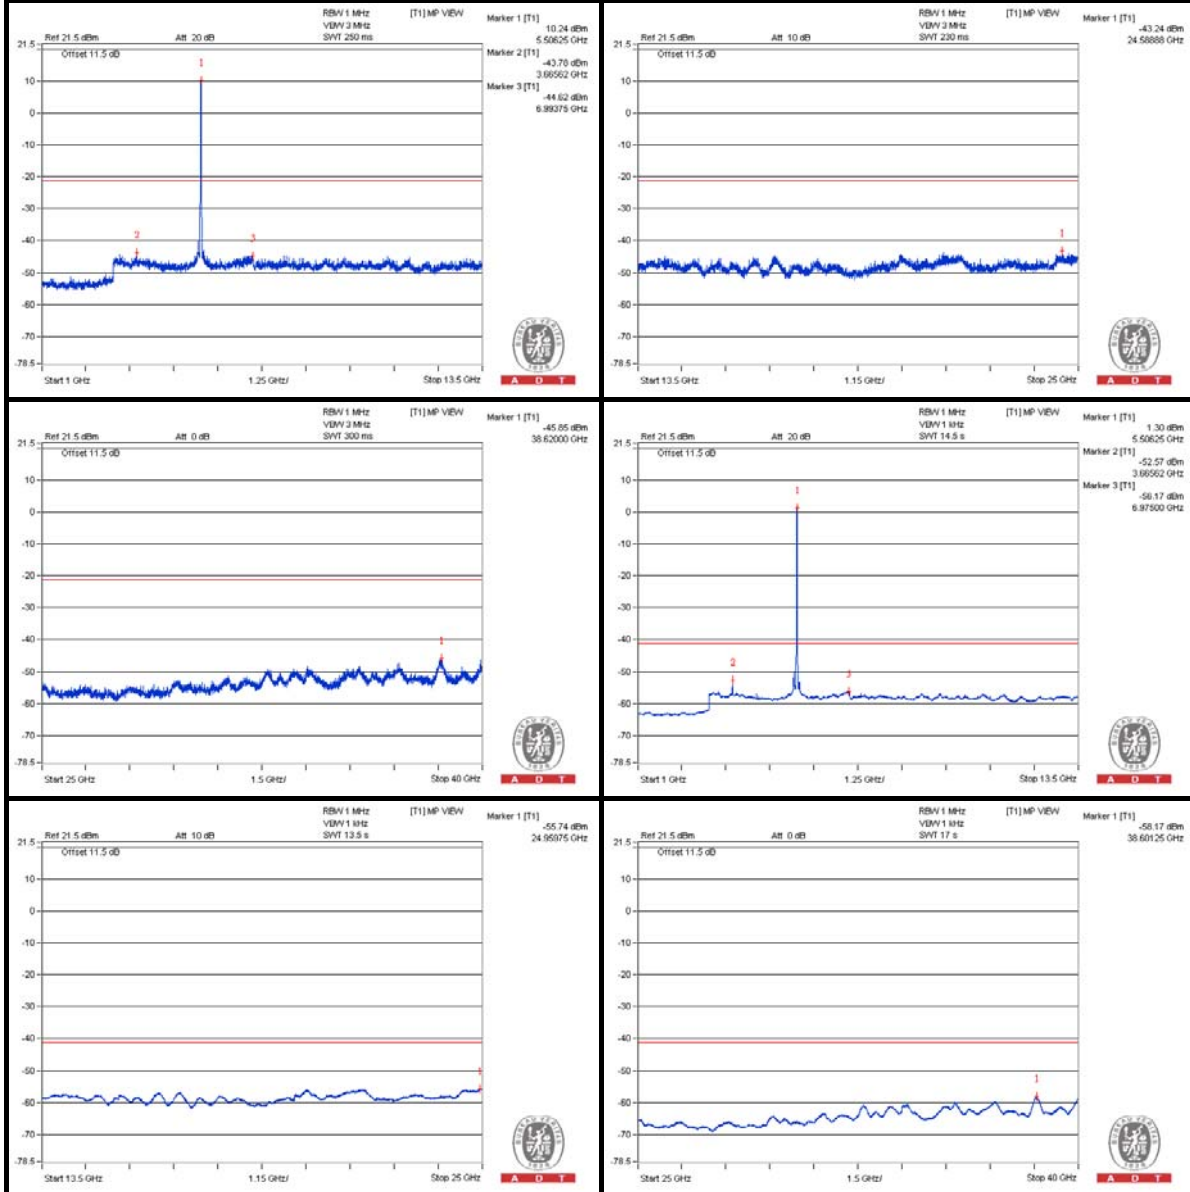



A D T

### Chain (1)

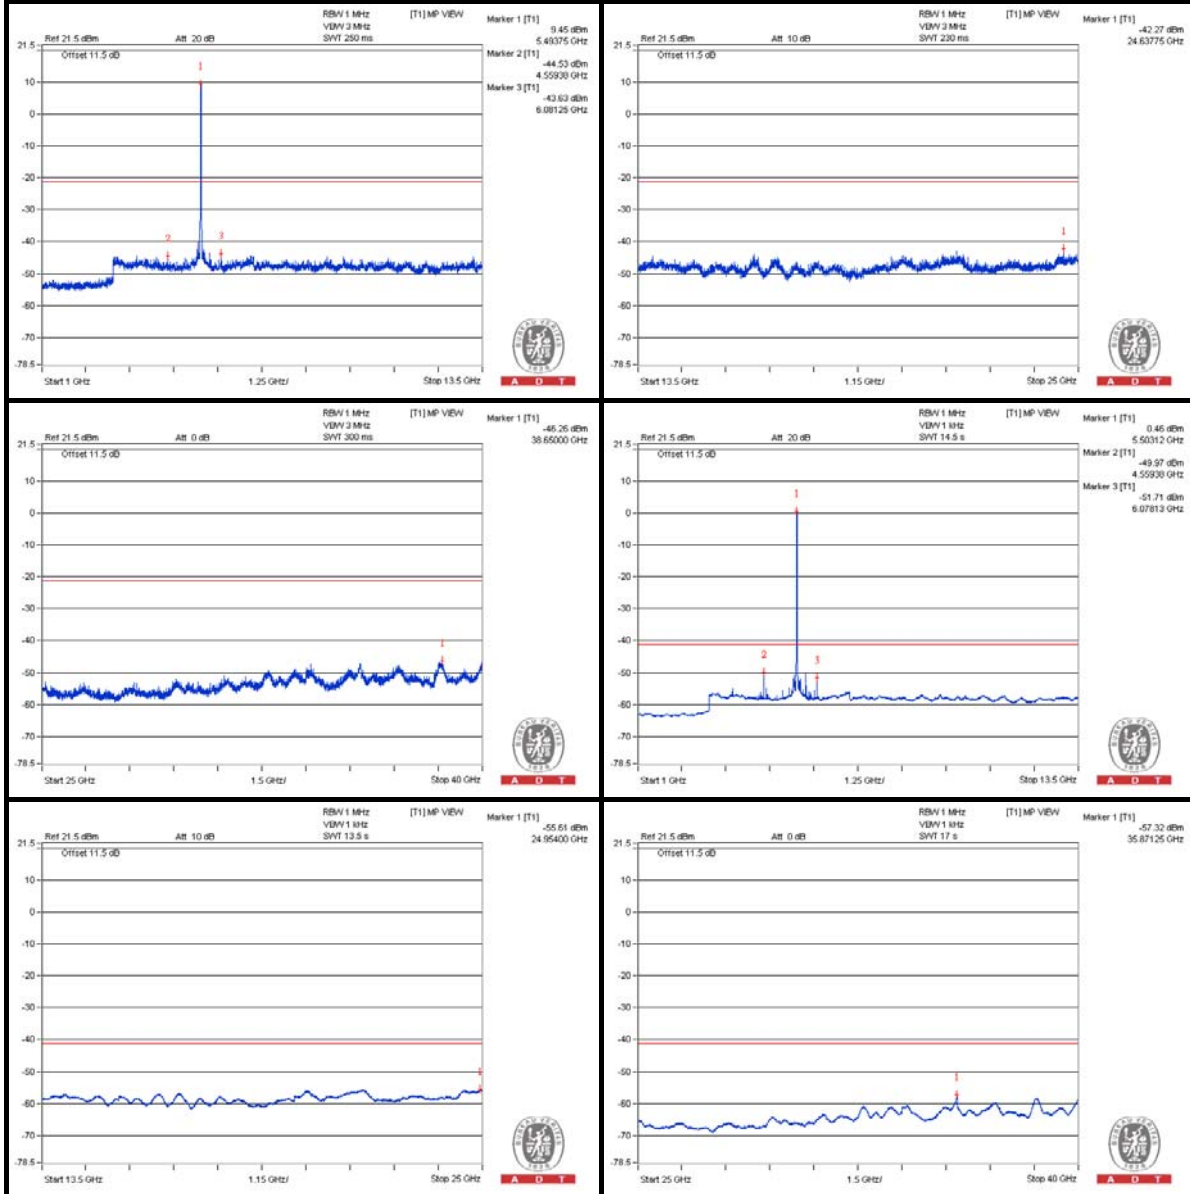


**Bandedge table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5425 PK	64.35	74	-9.65	-40	-39.86	6.01	-30.91
2	5424 AV	52.42	54	-1.58	-51.44	-52.32	6.01	-42.84


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
 d = measurement distance in 3 meters.

**Chain (0)**

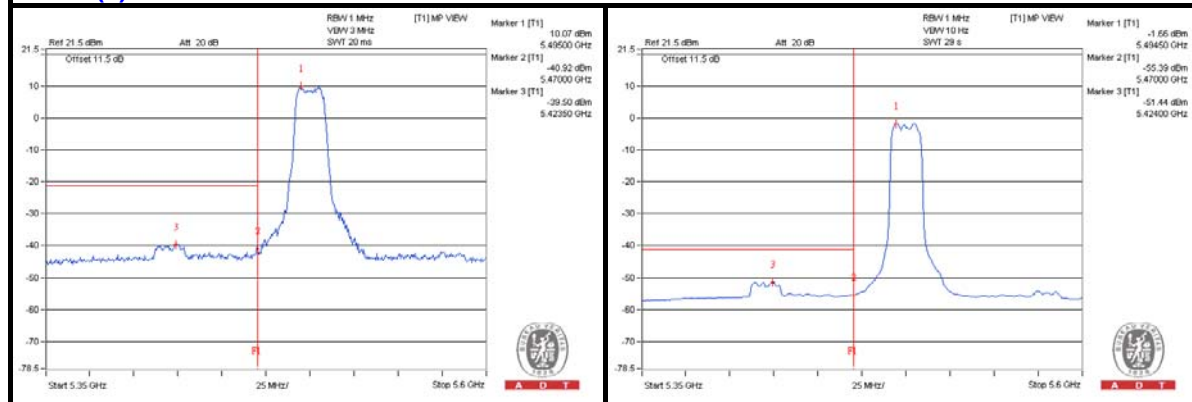

**Chain (1)**

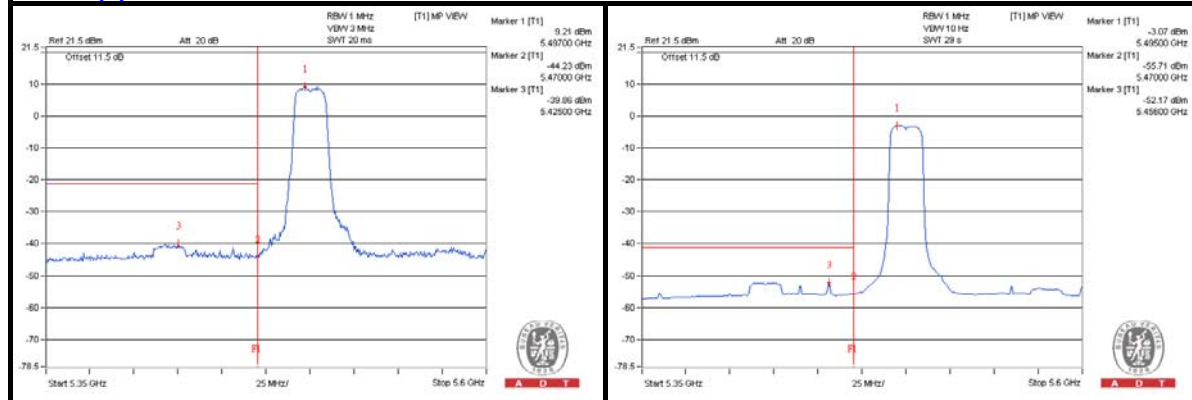



A D T

### 802.11n (HT20) – Channel 116

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3718.75 PK	58.85	74	-15.15	-44.11	-47.33	6.01	-36.41
2	3718.75 AV	51.44	54	-2.56	-51.19	-55.55	6.01	-43.82
3	7437.5 PK	57.71	74	-16.29	-46.09	-47.1	6.01	-37.55
4	7440.625 AV	48.71	54	-5.29	-54.49	-57	6.01	-46.55
5	11159.375 PK	62.95	74	-11.05	-38.96	-46.94	6.01	-32.31
6	11159.375 AV	50.45	54	-3.55	-51.85	-57.58	6.01	-44.81
7	16743 PK	57.76	74	-16.24	-49.79	-44.68	6.01	-37.5
8	16737.25 AV	46.92	54	-7.08	-59.61	-55.89	6.01	-48.34

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

### Chain (0)

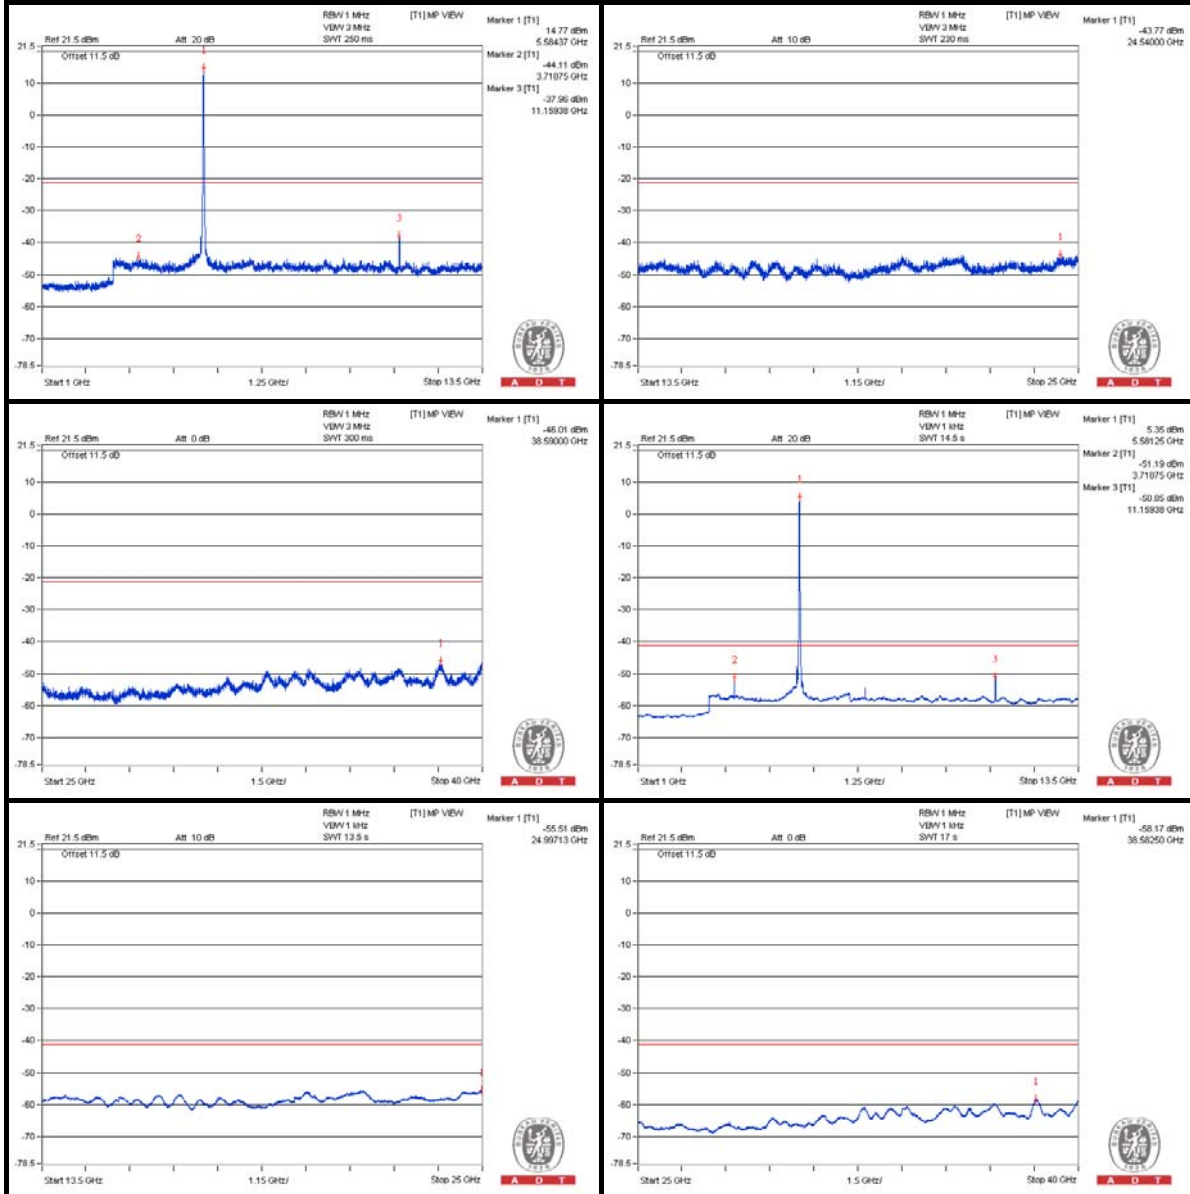



**Chain (1)**

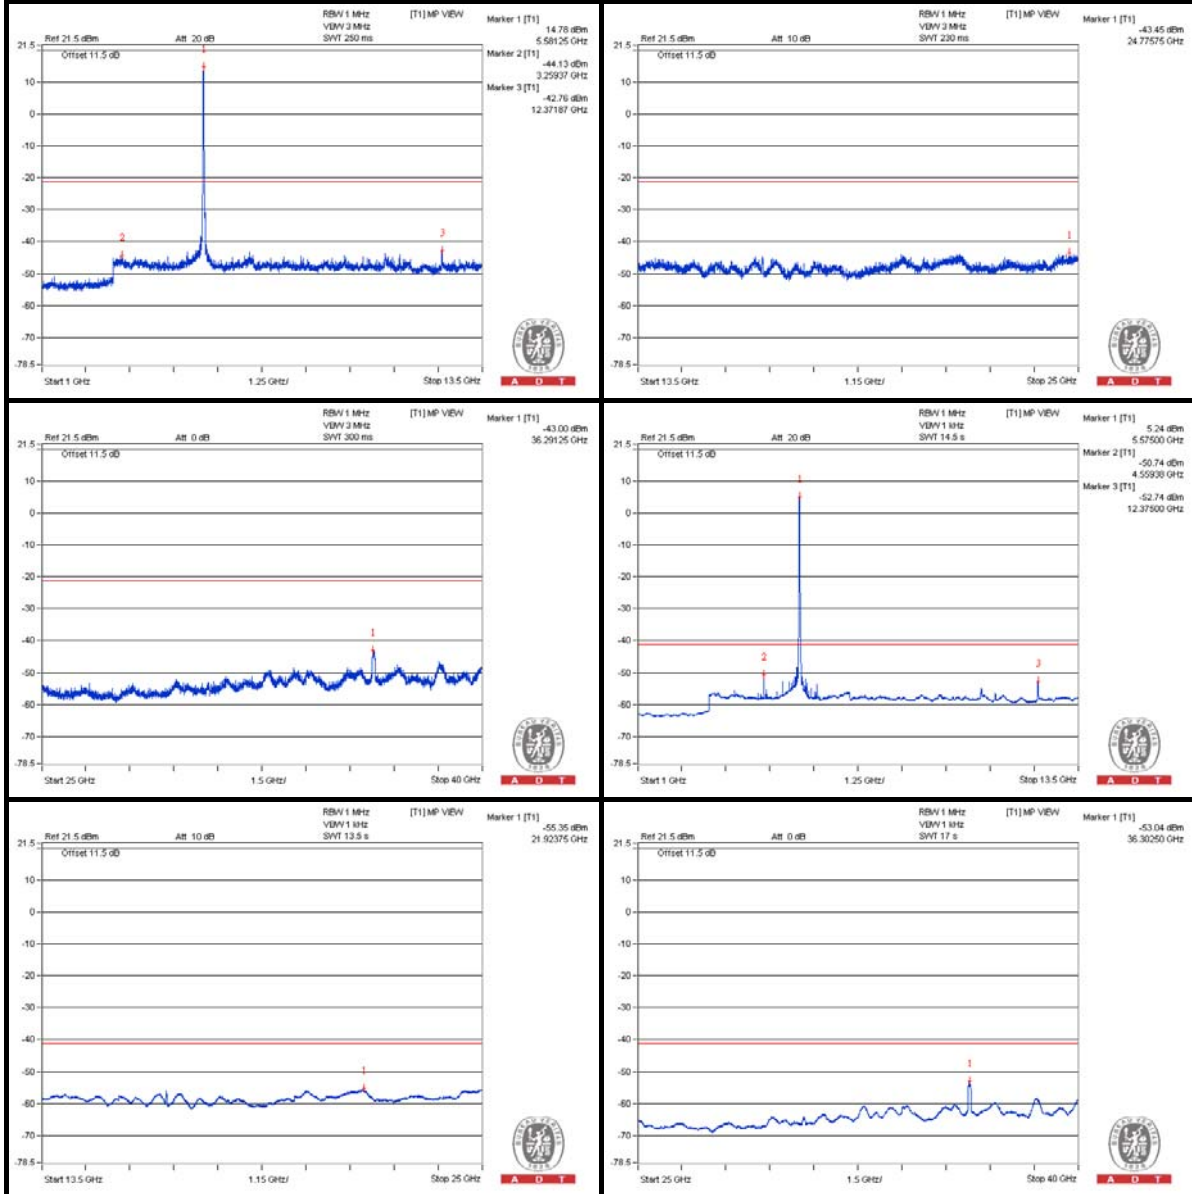



A D T

### 802.11n (HT20) – Channel 132

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3771.875 PK	60.7	74	-13.3	-42.69	-44.69	6.01	-34.56
2	3771.875 AV	54.23	54	* 0.23	-47.66	-55.77	6.01	-41.03
3	7540.625 PK	57.42	74	-16.58	-46.78	-46.95	6.01	-37.84
4	7546.875 AV	50.03	54	-3.97	-52.8	-56.43	6.01	-45.23
5	11318.75 PK	61.71	74	-12.29	-40.96	-45.17	6.01	-33.55
6	11321.875 AV	50.3	54	-3.7	-52.91	-55.39	6.01	-44.96
7	16984.5 PK	59	74	-15	-46.17	-44.54	6.01	-36.26
8	16984.5 AV	48.08	54	-5.92	-57.68	-55.1	6.01	-47.18

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

\* The unwanted emission was verified and the test result was passed by radiated measurement.  
(Please refer APPENDIX A)




A D T

### Chain (0)

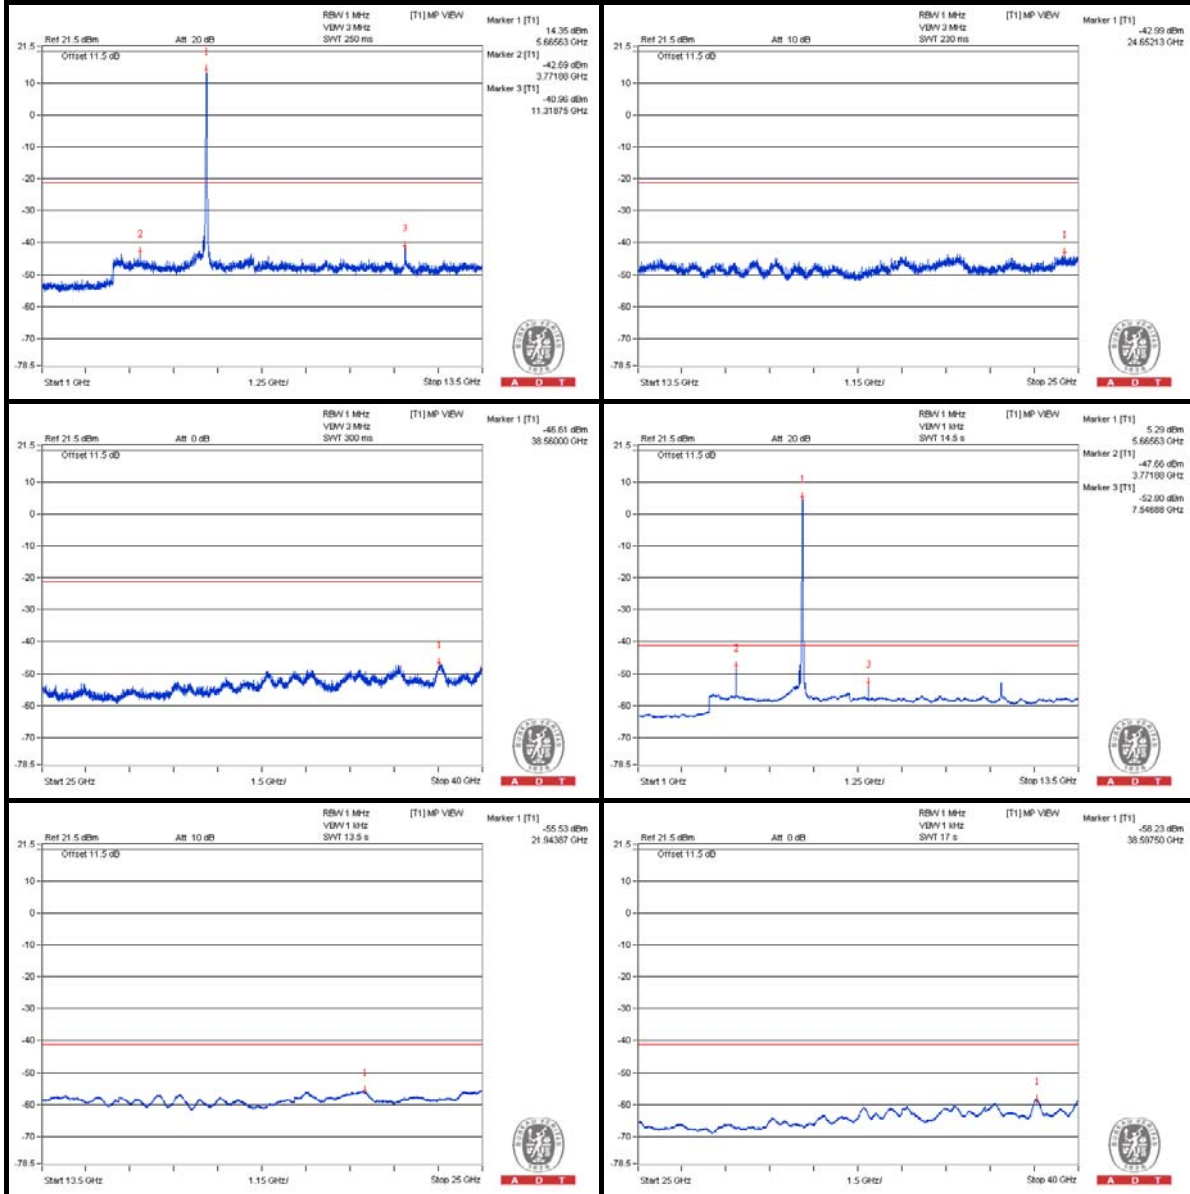

**Chain (1)**

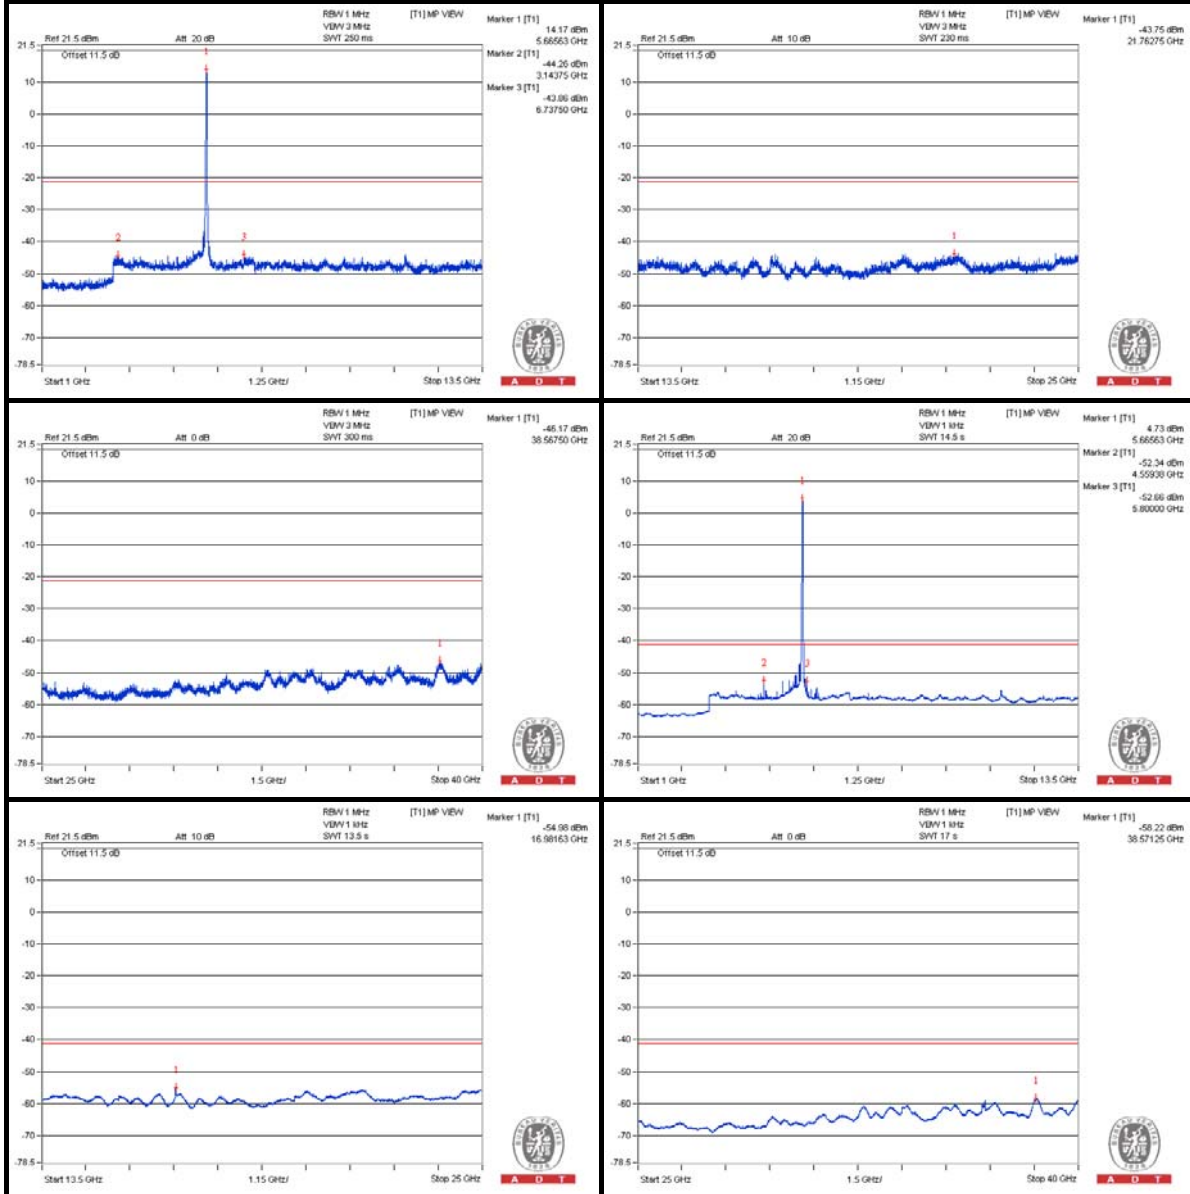



A D T

### 802.11n (HT20) – Channel 140

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3800 PK	61.13	74	-12.87	-41.48	-45.9	6.01	-34.13
2	3800 AV	56.15	54	* 2.15	-45.55	-55.42	6.01	-39.11
3	7600 PK	57.15	74	-16.85	-46.67	-47.65	6.01	-38.11
4	7600 AV	47.92	54	-6.08	-56	-56.75	6.01	-47.34
5	11409.375 PK	57.92	74	-16.08	-46.69	-46.05	6.01	-37.34
6	11396.875 AV	47.18	54	-6.82	-57.22	-56.98	6.01	-48.08
7	17099.5 PK	58.66	74	-15.34	-45.42	-45.84	6.01	-36.6
8	17099.5 AV	47.58	54	-6.42	-56.97	-56.45	6.01	-47.68

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

\* The unwanted emission was verified and the test result was passed by radiated measurement.  
(Please refer APPENDIX A)




A D T

### Chain (0)

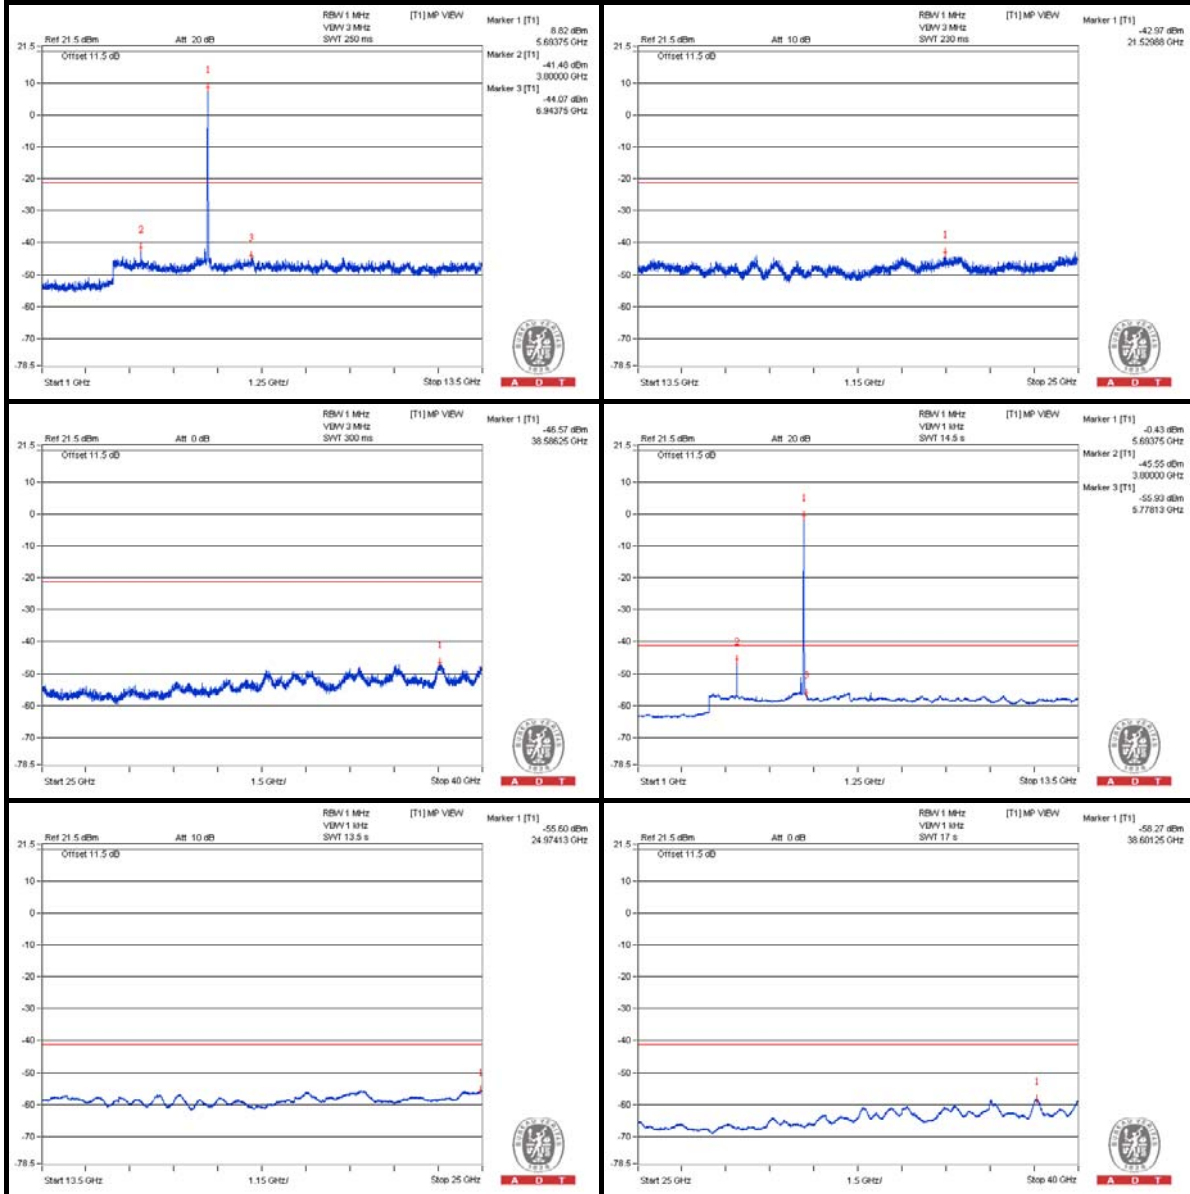

### Chain (1)

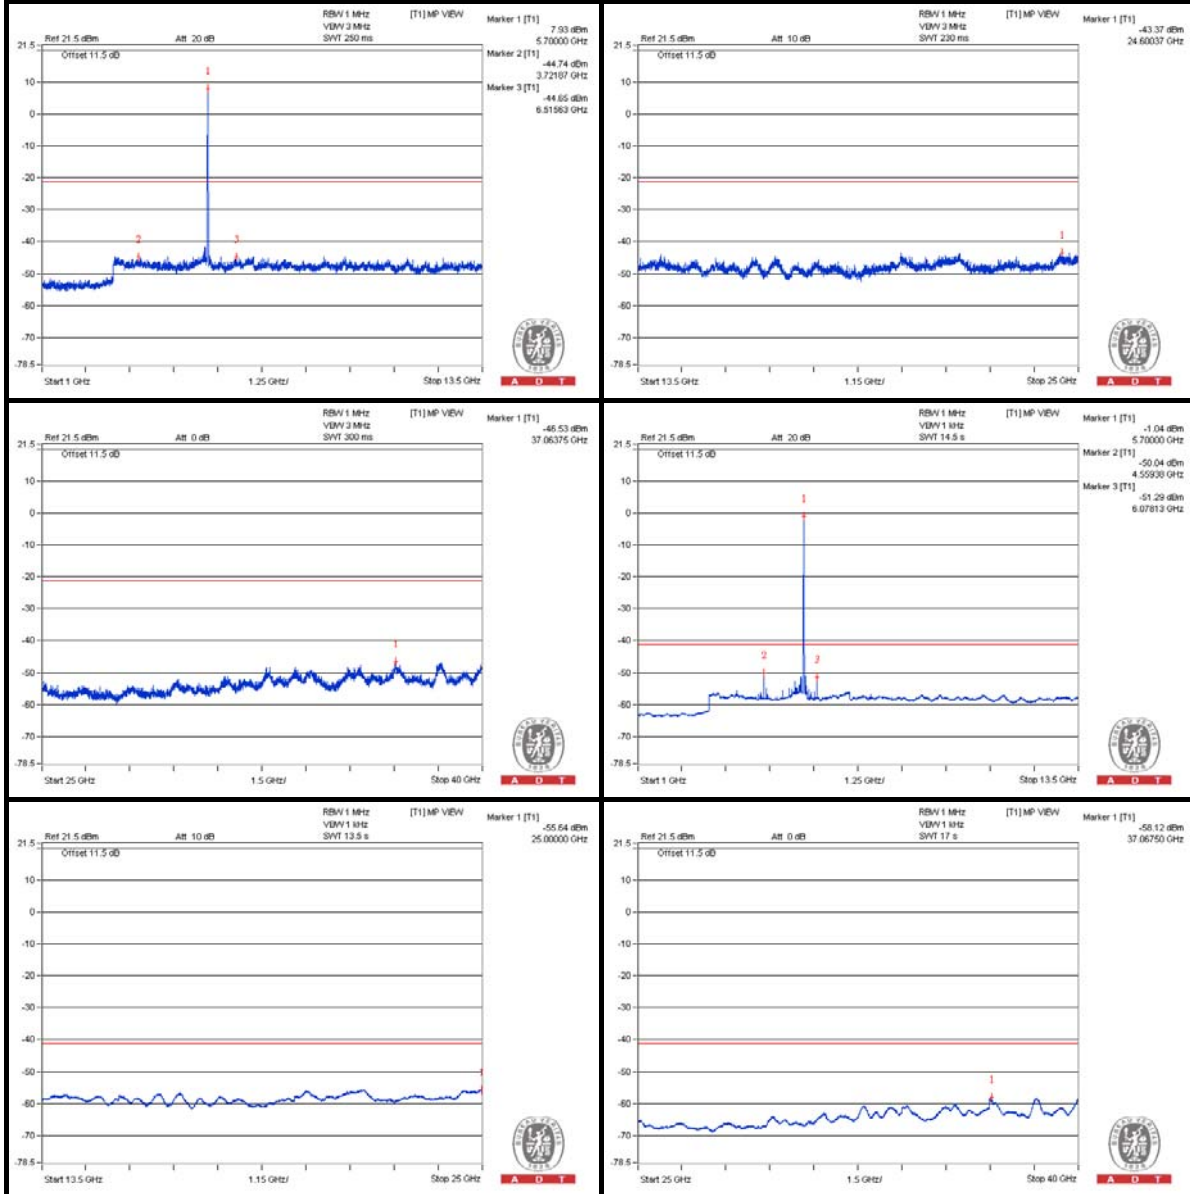

**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5725 PK	65.44	74	-8.56	-39.5	-38.27	6.01	-29.82
2	5760.2 AV	51.3	54	-2.7	-57.1	-50.91	6.01	-43.96

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

**Chain (0)**

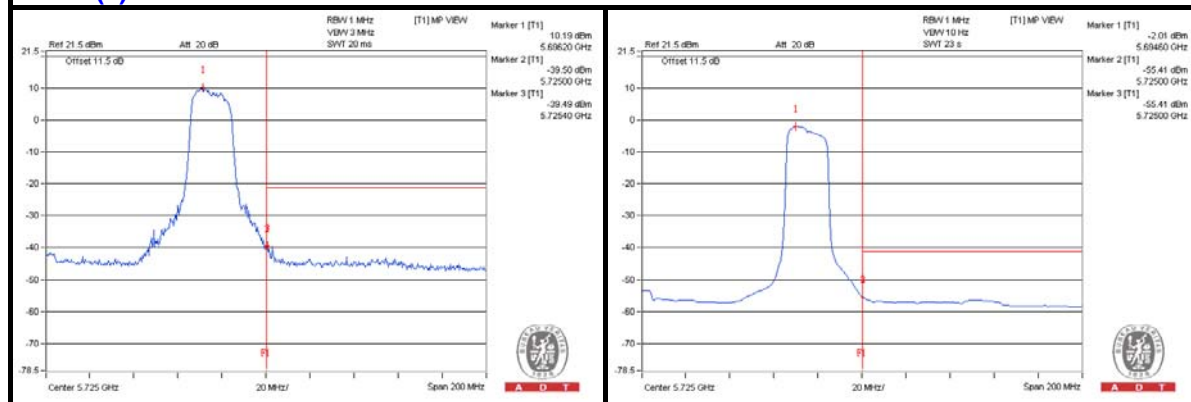

**Chain (1)**

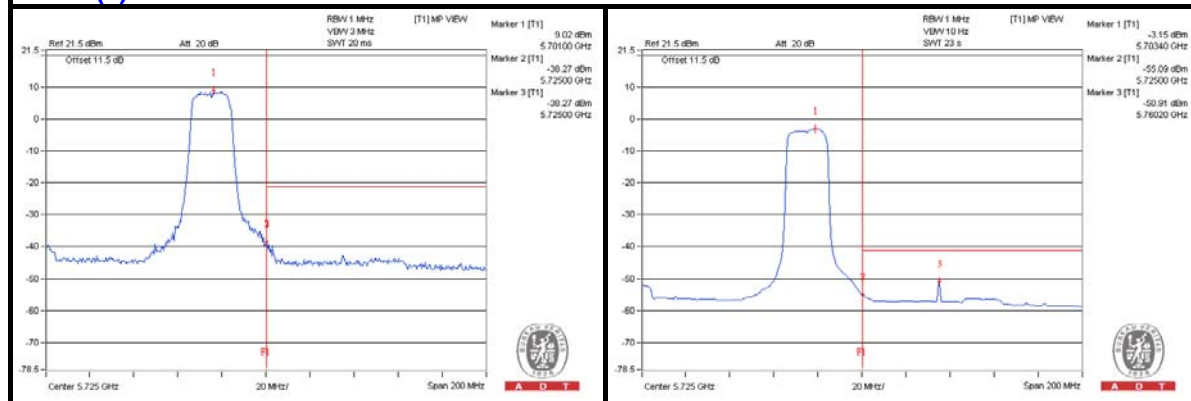





A D T

### 802.11n (HT40) – Channel 38

#### Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3456.25 PK	57.36	74	-16.64	-46.6	-47.26	6.01	-37.9
2	3459.375 AV	47.29	54	-6.71	-56.28	-57.84	6.01	-47.97
3	6915.625 PK	58.81	74	-15.19	-44.7	-46.4	6.01	-36.45
4	6918.75 AV	48.18	54	-5.82	-55.98	-56.22	6.01	-47.08
5	10378.125 PK	57.09	74	-16.91	-47.24	-47.14	6.01	-38.17
6	10378.125 AV	46.39	54	-7.61	-57.99	-57.79	6.01	-48.87
7	15564.25 PK	56.47	74	-17.53	-47.93	-47.69	6.01	-38.79
8	15572.875 AV	46.35	54	-7.65	-57.79	-58.08	6.01	-48.91

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


### Chain (0)

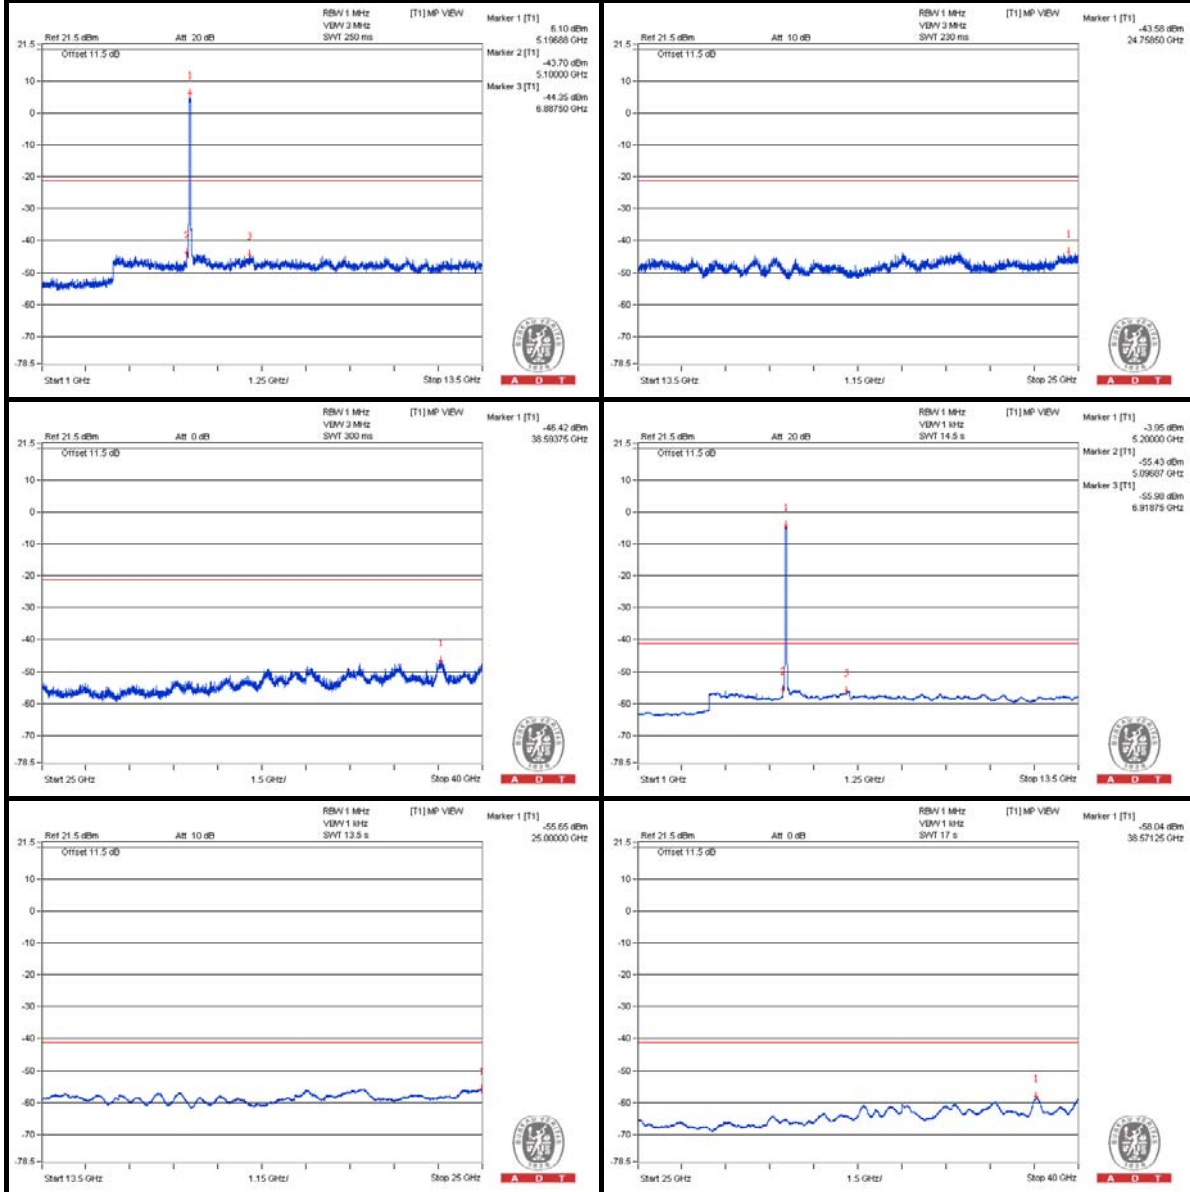



A D T

### Chain (1)

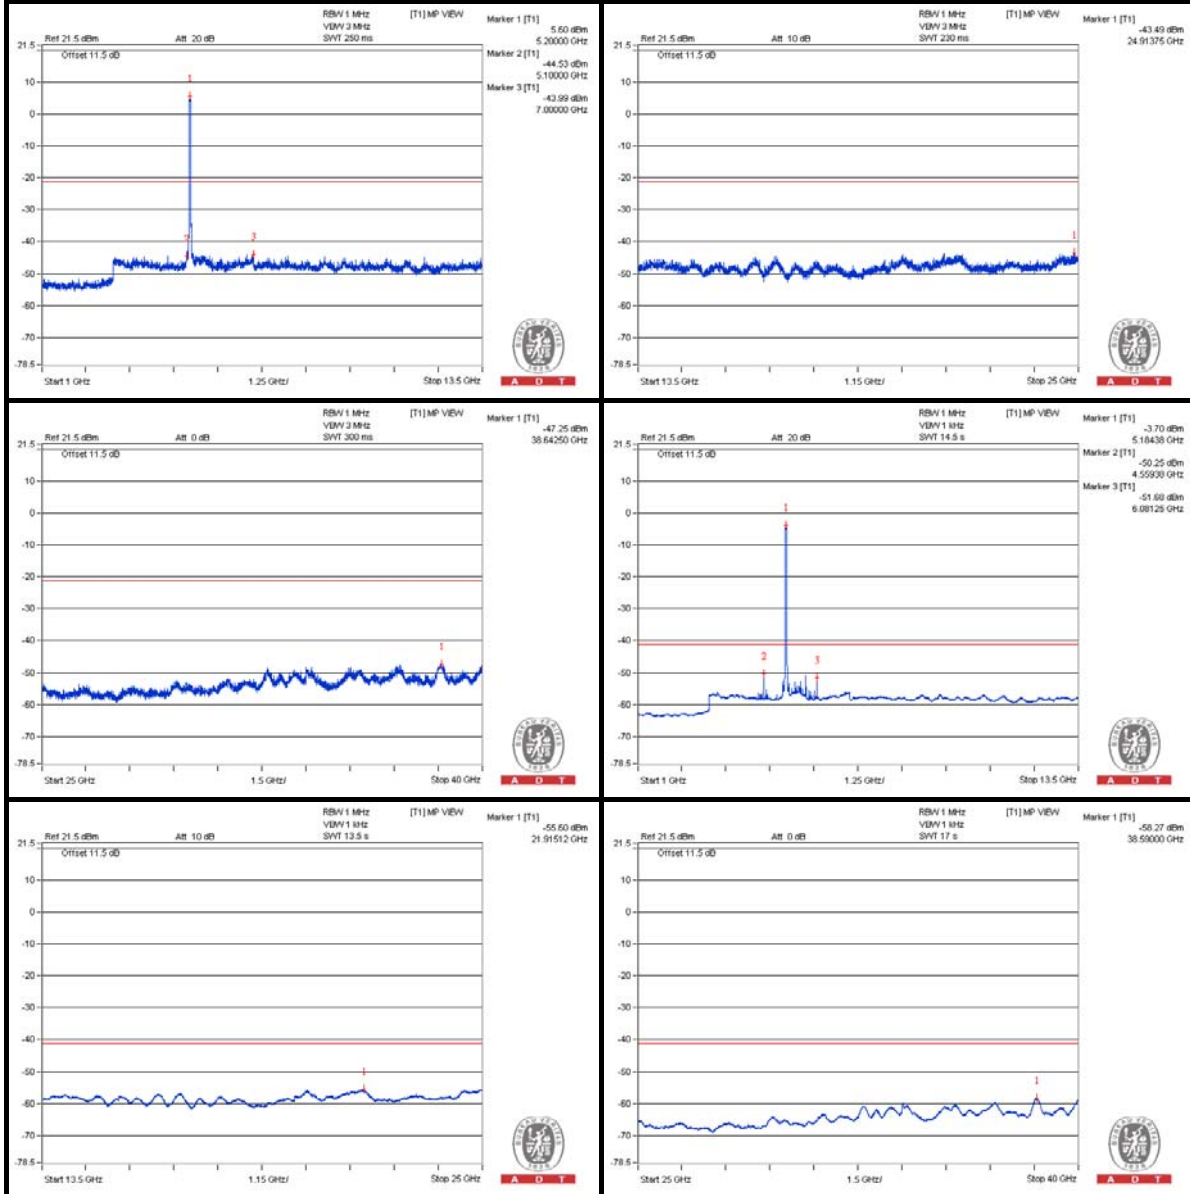

**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5150 PK	66.4	74	-7.6	-36.79	-39.33	6.01	-28.86
2	5150 AV	50.91	54	-3.09	-52.38	-54.66	6.01	-44.35

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

**Chain (0)**

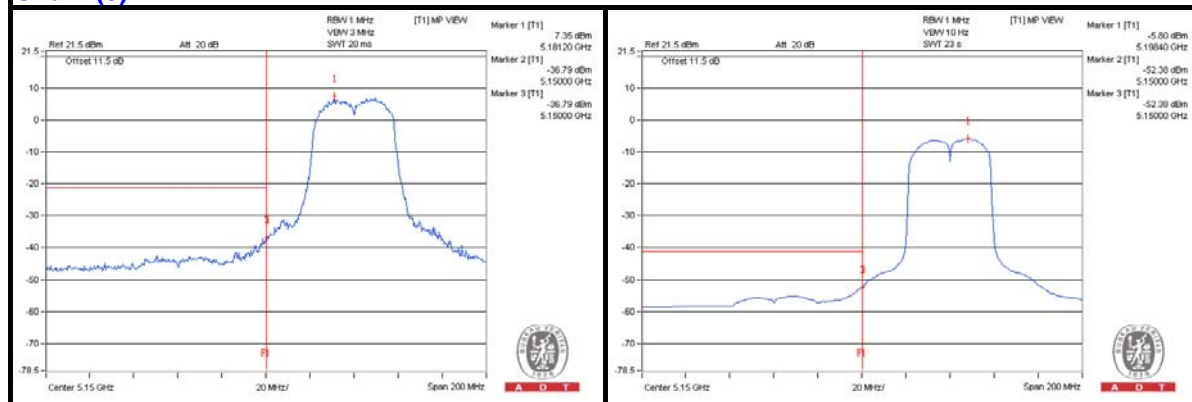

**Chain (1)**

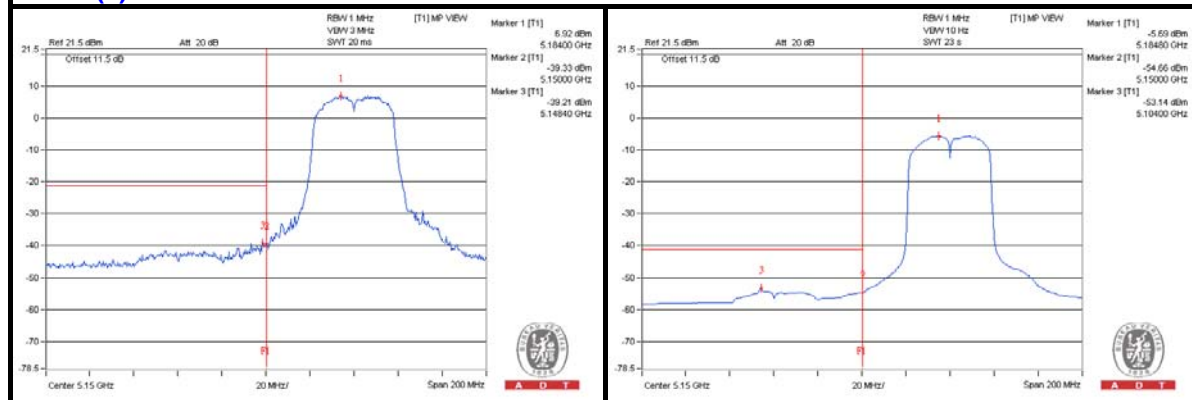



A D T

### 802.11n (HT40) – Channel 46

#### Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3487.5 PK	57.59	74	-16.41	-46.25	-47.17	6.01	-37.67
2	3484.375 AV	47.18	54	-6.82	-56.39	-57.94	6.01	-48.08
3	6971.875 PK	60.18	74	-13.82	-42.49	-46.67	6.01	-35.08
4	6971.875 AV	48.21	54	-5.79	-56.15	-55.99	6.01	-47.05
5	10459.375 PK	56.83	74	-17.17	-46.39	-48.85	6.01	-38.43
6	10456.25 AV	46.14	54	-7.86	-58.16	-58.13	6.01	-49.12
7	15687.875 PK	57.83	74	-16.17	-47.65	-45.51	6.01	-37.43
8	15682.125 AV	45.59	54	-8.41	-58.71	-58.67	6.01	-49.67

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

### Chain (0)

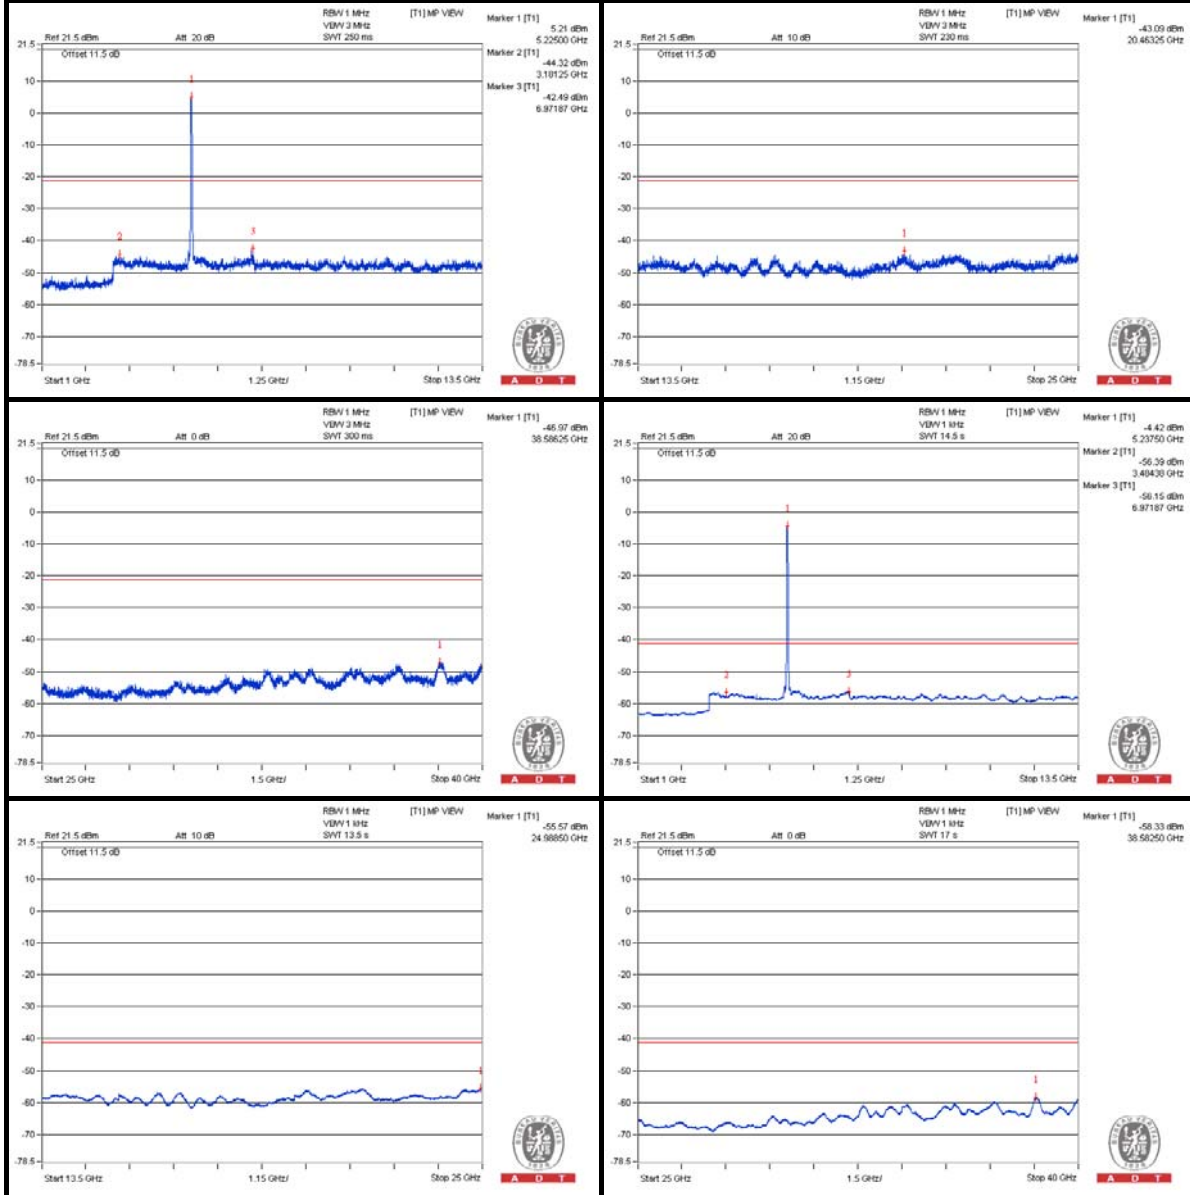

**Chain (1)**

