

DFS Test Report

Applicant : Plume Design, Inc.

Product Name : SuperPod with WiFi 7

Trade Name : Plume Design, Inc.

Model Number : PB1A

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Received Date : Sep. 27, 2024

Test Period : Oct. 29, 2024 ~ Nov. 04, 2024

Issued Date : Feb. 27, 2025

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Bade test site :

Test Firm Registration Number: 226252

Test Firm Designation Number: TW0010

Wugu test site :

Test Firm Registration Number: 191812

Test Firm Designation Number: TW0034

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Description	Revised By
00	Feb. 27, 2025	Initial Issue	Snow Wang

Verification of Compliance

Applicant : Plume Design, Inc.

Product Name : SuperPod with WiFi 7

Trade Name : Plume Design, Inc.

Model Number : PB1A

FCC ID : 2AG7G- PB1A

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Test Site Environment.....	6
2	EUT Description.....	7
3	Test Methodology	9
3.1.	Mode of Operation	9
3.2.	EUT Test Step	9
3.3.	Test Instruments	9
4	Dynamic Frequency Selection	10
4.1.	Limits	10
4.2.	Test and Measurement System	14
5	Test Results	16
5.1.	Radar Waveforms and Traffic	16
5.2.	Channel Loading	32
5.3.	Channel Availability Check Time.....	36
5.4.	Channel Move Time and Channel Closing Transmission Time.....	39
5.5.	Non-Occupancy Period	41
5.6.	U-NII Detection Bandwidth	42
5.7.	Statistical Performance check	45

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(h)(2)	Channel Availability Check Time	PASS	---
15.407(h)(2)	Channel Move Time	PASS	---
15.407(h)(2)	Channel Closing Transmission Time	PASS	---
15.407(h)(2)	Non-Occupancy Period	PASS	---
15.407(h)(2)	U-NII Detection Bandwidth	PASS	---
15.407(h)(2)	Statistical Performance check	PASS	---

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
Canada RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: ☐ No. 140-1, Changan Street, Bade District, Taoyuan City, Taiwan (R.O.C.)

Site Address: ☒ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity

Applicant	Plume Design, Inc. 325 Lytton Ave., Palo Alto, CA 94301		
Product Name	SuperPod with WiFi 7		
Trade Name	Plume Design, Inc.		
Model Number	PB1A		
FCC ID	2AG7G- PB1A		
Operate Frequency	Frequency Band		Frequency Range (MHz)
	802.11a	U-NII Band 2-A	5260 – 5320
		U-NII Band 2-C	5500 – 5720
	802.11n HT20 / 802.11ac VHT20 / 802.11ax HE20 / 802.11be EHT20	U-NII Band 2-A	5260 – 5320
		U-NII Band 2-C	5500 – 5720
	802.11n HT40 / 802.11ac VHT40 / 802.11ax HE40 / 802.11be EHT40	U-NII Band 2-A	5270 – 5310
		U-NII Band 2-C	5510 – 5710
	802.11ac VHT80 / 802.11ax HE80 / 802.11be EHT80	U-NII Band 2-A	5290
		U-NII Band 2-C	5530 – 5690
	802.11ac VHT160 / 802.11ax HE160 / 802.11be EHT160	U-NII Band 2-A	5250
		U-NII Band 2-C	5570
Modulation Type	OFDM/OFDMA		
Antenna Delivery	3TX (CDD/Beamforming on)		
Operate Temp. Range	0 ~ +40 °C		
EUT Power Rating	100-240 V, 50-60 Hz, 0.8 A		

Antenna information				
Type	Antenna		Frequency	Max. Gain (dBi)
PIFA Antenna	5G1	ANT-0 (Ant. 5)	U-NII Band 2-A	3.8
			U-NII Band 2-C	3.8
	5G2	ANT-1 (Ant. 6)	U-NII Band 2-A	4.2
			U-NII Band 2-C	3.7
	5G3	ANT-2 (Ant. 7)	U-NII Band 2-A	3.5
			U-NII Band 2-C	3.3

Items	Description	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
TPC Function	☒ With TPC	☐ Without TPC
Weather Band (5600 ~ 5650 MHz)	☒ With 5600 ~ 5650 MHz	☐ Without 5600 ~ 5650 MHz
Beamforming Function	☒ With Beamforming	☐ Without Beamforming
Equipment Type	☐ Outdoor access point	
	☒ Indoor access point	
	☐ Fixed point-to-point access points	
	☐ Client devices	
Operating mode	☒ Master	
	☐ Client with radar detection	
	☐ Client without radar detection	
	☐ Ad-Hoc	
	☒ Bridge	
	☐ MESH	

Note : DFS controls (hardware or software) related to radar detection are NOT accessible to the user.
Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

3 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
802.11be EHT20
802.11be EHT40
802.11be EHT80
802.11be EHT160

3.2. EUT Test Step

1.	Setup the EUT shown on 3.2.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to Access Point.
4.	The EUT is operated in the normal mode to the purposes of measurement.

3.3. Test Instruments

For Conducted

Test Period: Oct. 29, 2024 ~ Nov. 04, 2024

Testing Engineer: An Wu

Test Site		RF02-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY63460164	Mar. 08, 2024	1 year
☒	Spectrum Analyzer (10 Hz~44 GHz)	R&S	FSV3044	101255	Nov. 30, 2023	1 year
☒	Signal Generator	R&S	SMM100A	101740	Jan. 26, 2024	1 year

Note: N.C.R. = No Calibration Request.

4 Dynamic Frequency Selection

4.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 Compliance measurement procedures for unlicensed-national information infrastructure devcies operating in the 5250-5350 MHZ and 5470-5725 MHZ bands incorporating dynamic frequency selection.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client (without Radar Detection)	Client (with Radar Detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client With Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note : Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	U-NII Band 2-Aalue (See Notes 1,2 and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01.	

Table 4: DFS Response Requirement U-NII Band 2-Aalues

Parameter	U-NII Band 2-Aalue
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100 % of the U-NII 99 % transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60 %	30
2	1-5	150-230	23-29	60 %	30
3	6-10	200-500	16-18	60 %	30
4	11-20	200-500	12-16	60 %	30
Aggregate (Radar Types 1-4)				80 %	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 5a: Pulse Repetition Intervals U-NII Band 2-Aalues for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Signal

Radar Waveform	Bursts	Pulses per Burst	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80 %	30


Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70 %	30

4.2. Test and Measurement System

4.2.1. Setup for Master with injection at the Master

Example Radiated Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

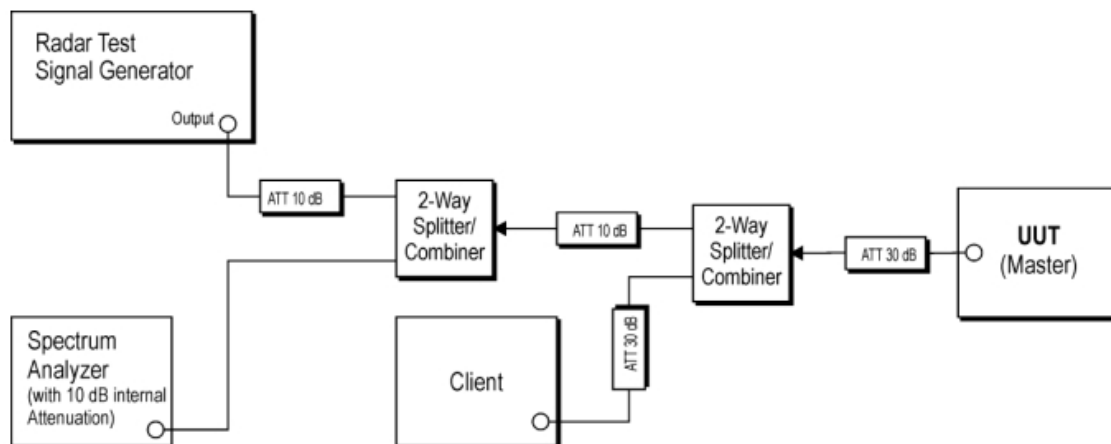

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	SuperPod with WiFi 7	Plume Design, Inc.	PB1A	2AG7G-PB1A

4.2.2. System Calibration

The short pulse types 0,1,2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the May 2014 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

4.2.3. System Calibration

The Interference Radar Detection Threshold Level is (-63 dBm), The above equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (U-NII Band 2-ABW) were set to at least 3 MHz.


The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was (-63 dBm). Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

4.2.4. Adjustment of Displayed Traffic Level

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Software to ping the client is permitted to simulate data transfer but must have random ping intervals. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


5 Test Results

5.1. Radar Waveforms and Traffic

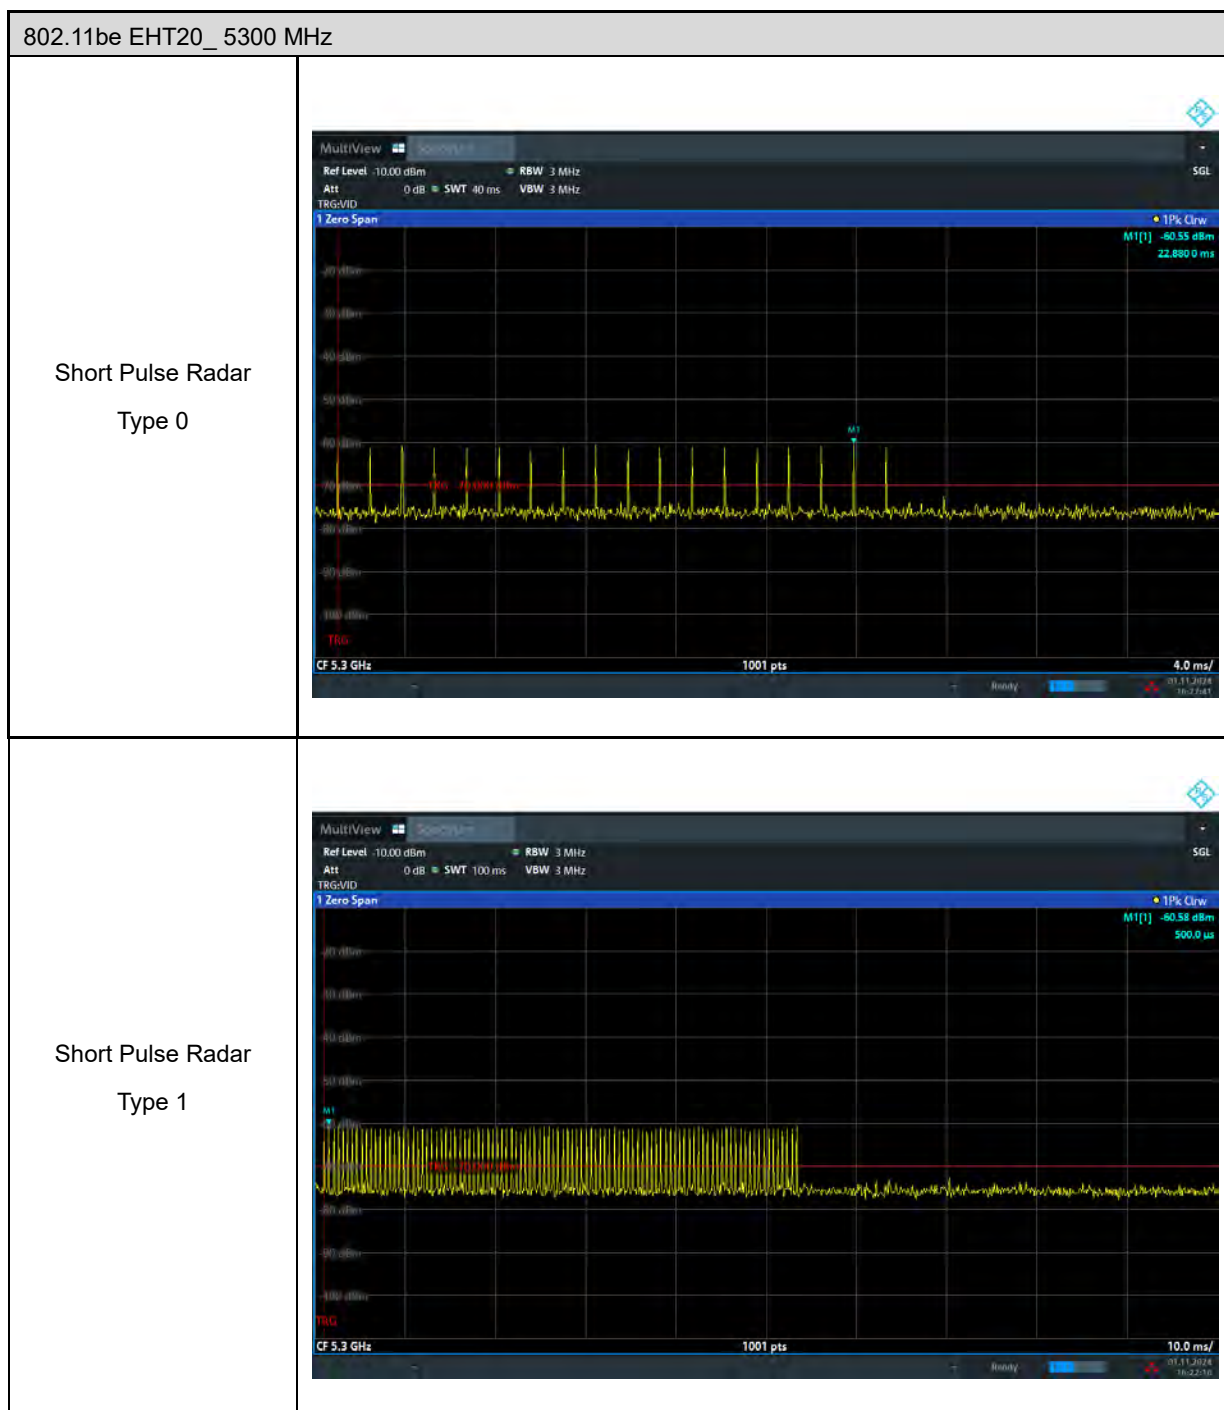


802.11be EHT20_ 5300 MHz

Short Pulse Radar
Type 2

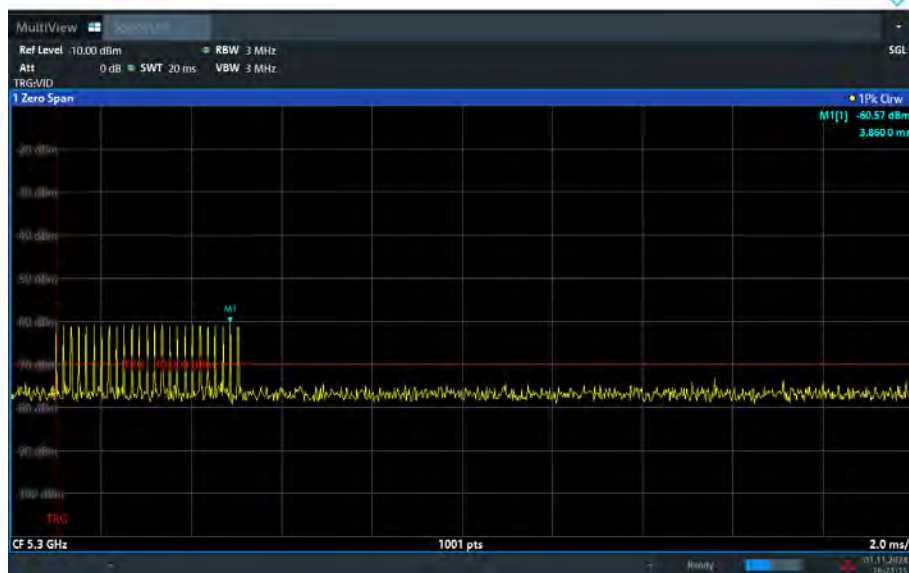


Short Pulse Radar
Type 3

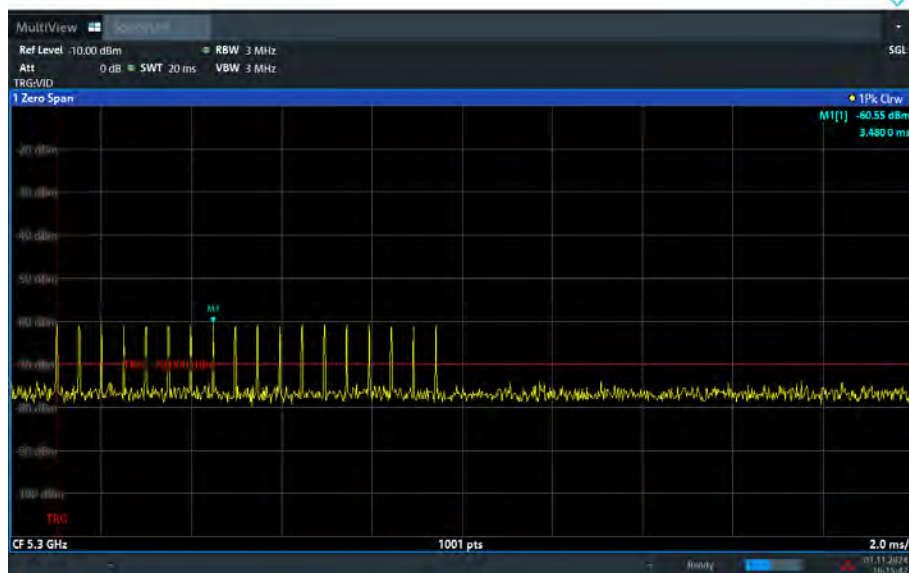

802.11be EHT20_ 5300 MHz

Short Pulse Radar
Type 4

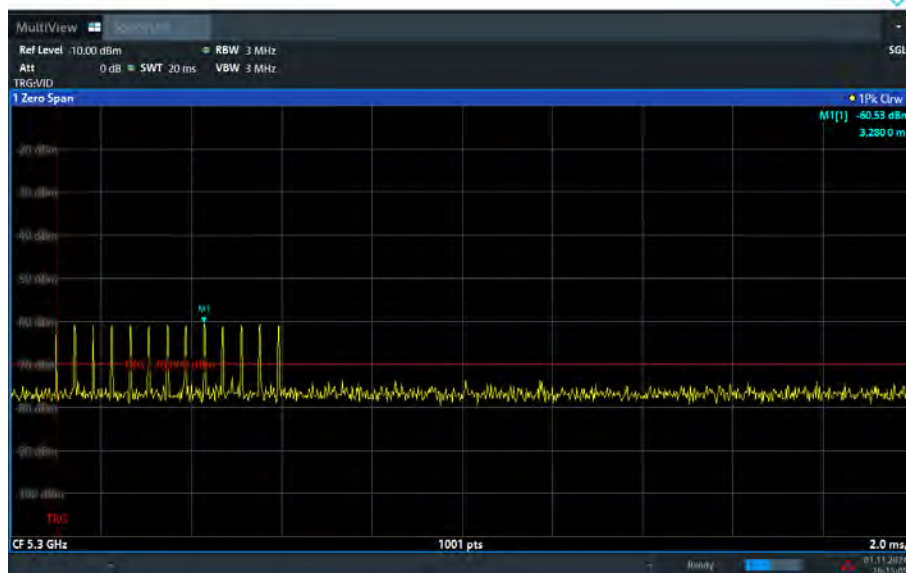


Long Pulse Radar
Type 5




802.11be EHT20_ 5300 MHz

Frequency Hopping
Radar
Type 6

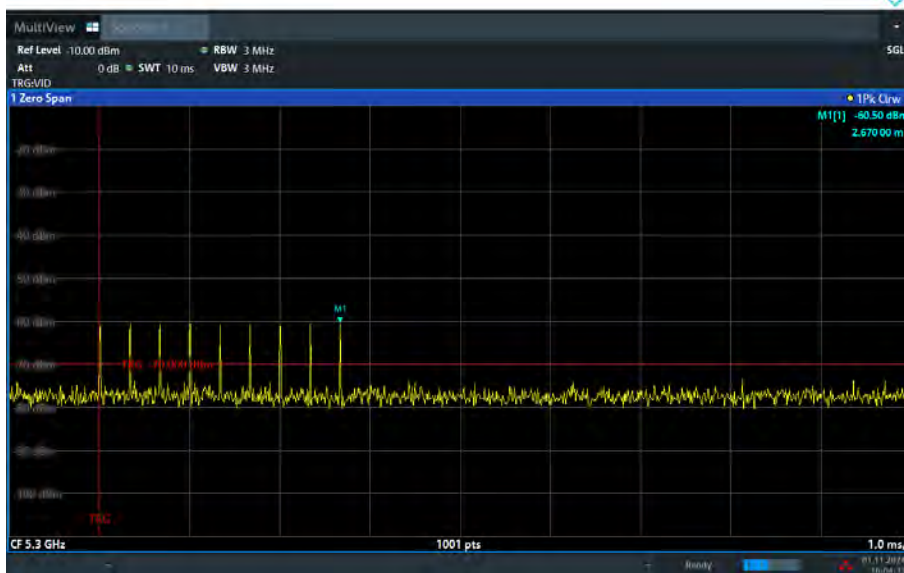


802.11be EHT40_ 5310 MHz

Short Pulse Radar
Type 0

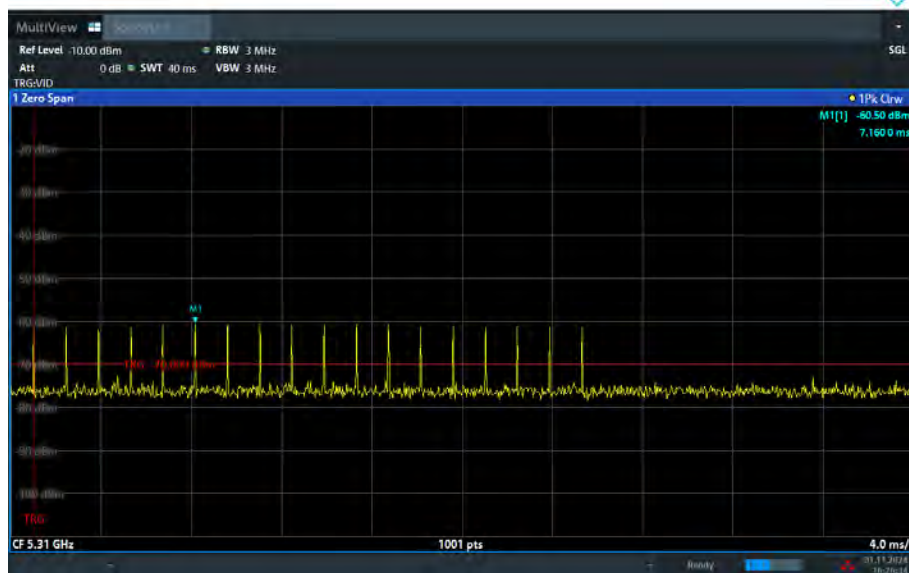


Short Pulse Radar
Type 1

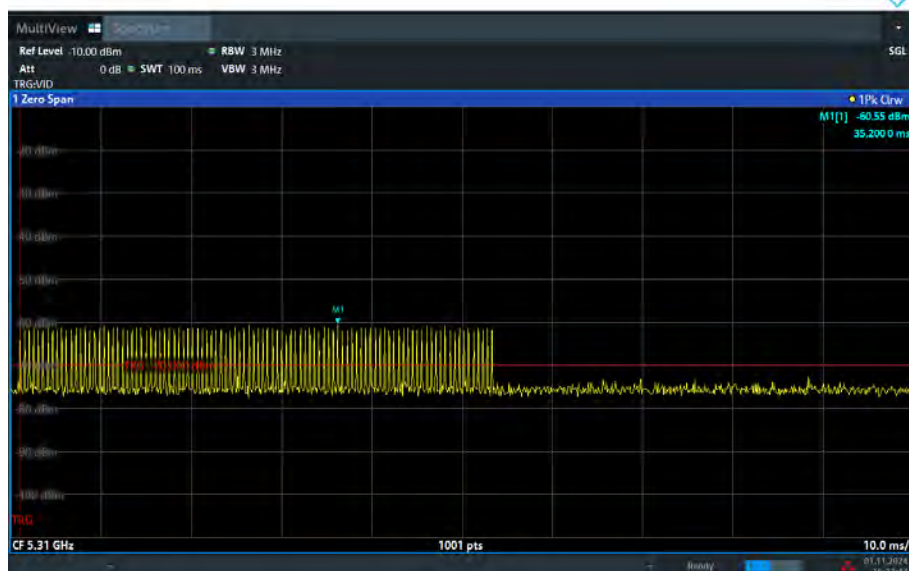


802.11be EHT40_ 5310 MHz

Short Pulse Radar
Type 2

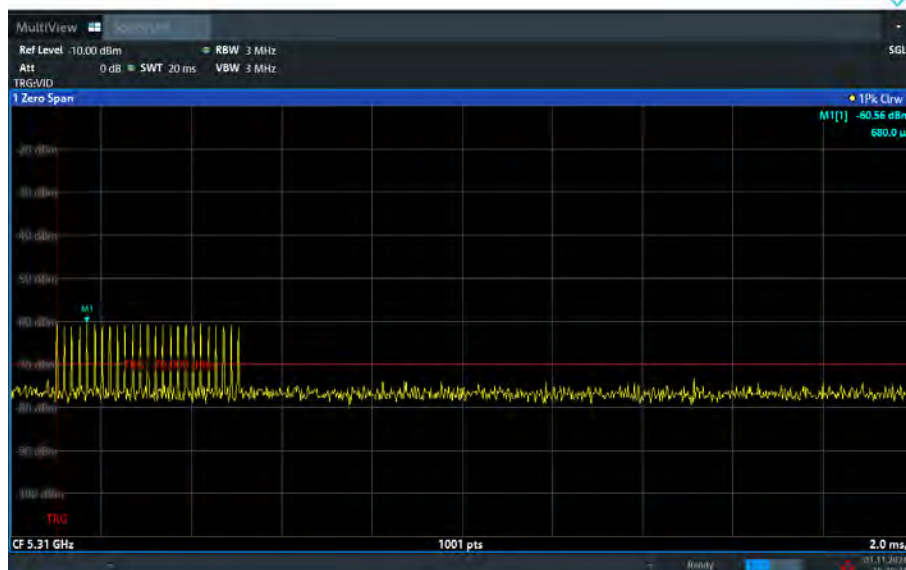


Short Pulse Radar
Type 3

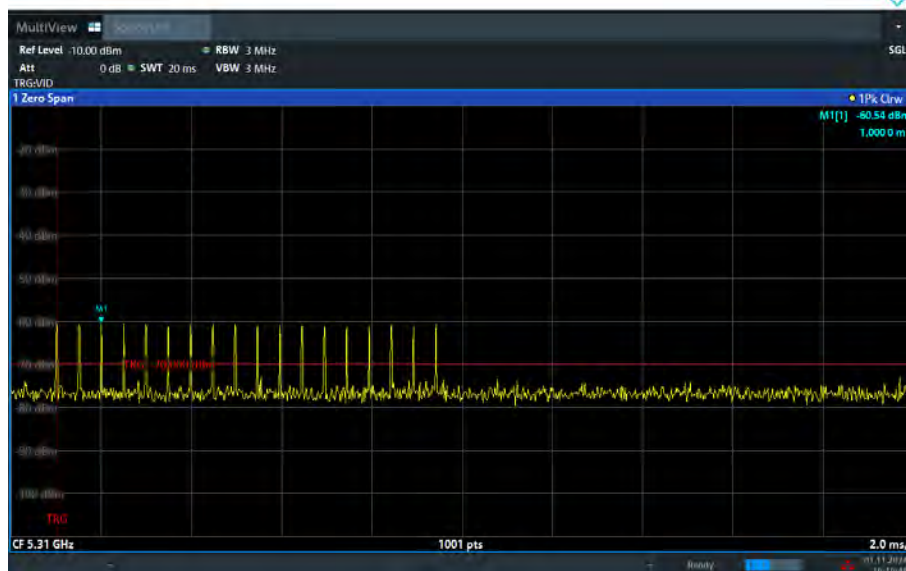


802.11be EHT40_ 5310 MHz

Short Pulse Radar
Type 4

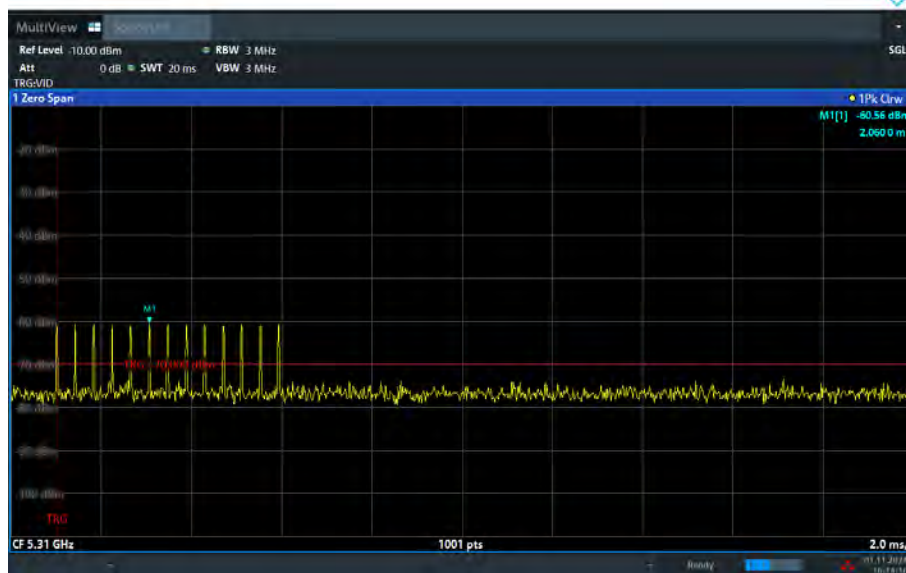


Long Pulse Radar
Type 5

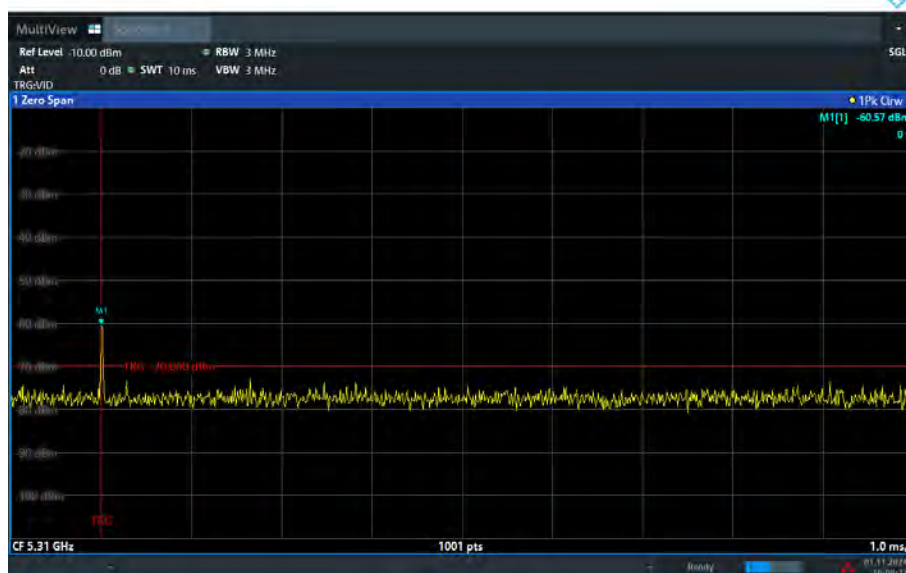


802.11be EHT40_ 5310 MHz

Frequency Hopping
Radar
Type 6

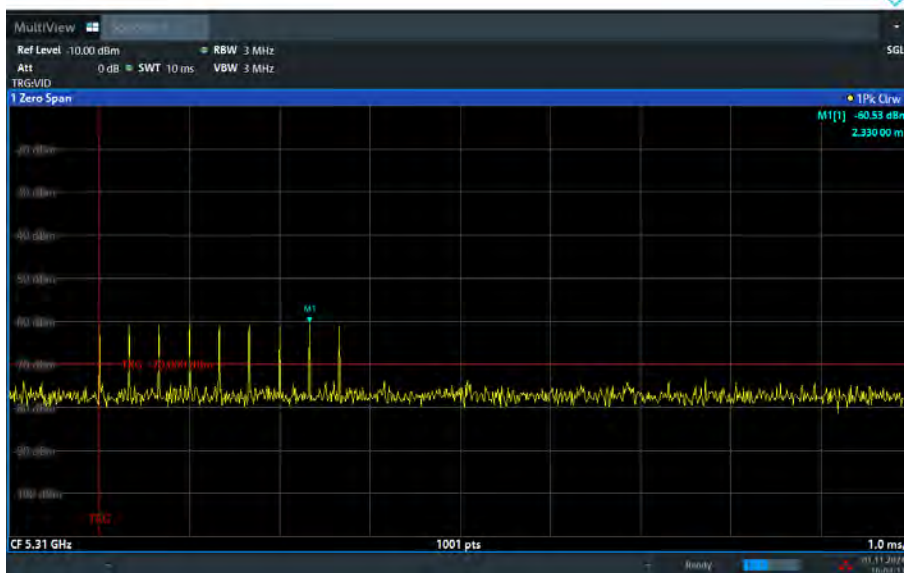


802.11be EHT80_ 5290 MHz

Short Pulse Radar
Type 0

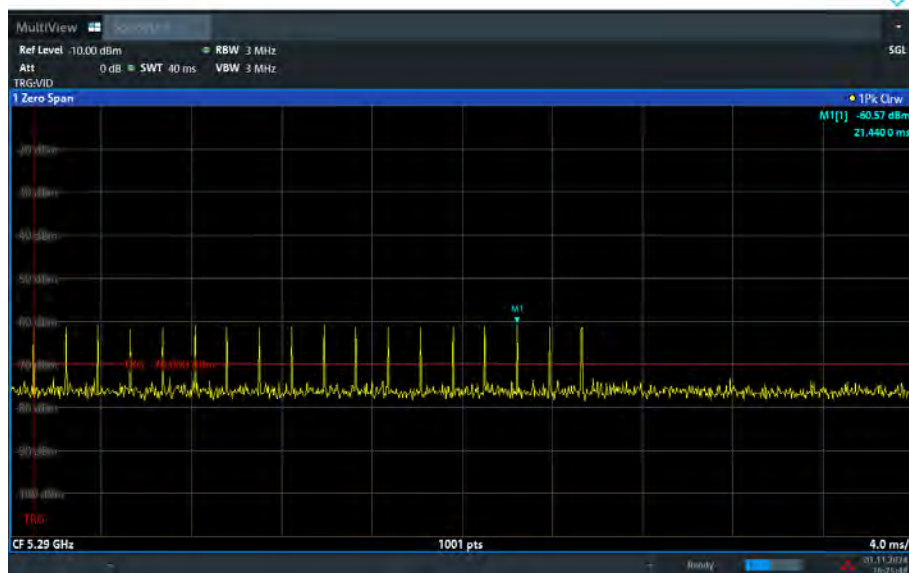


Short Pulse Radar
Type 1

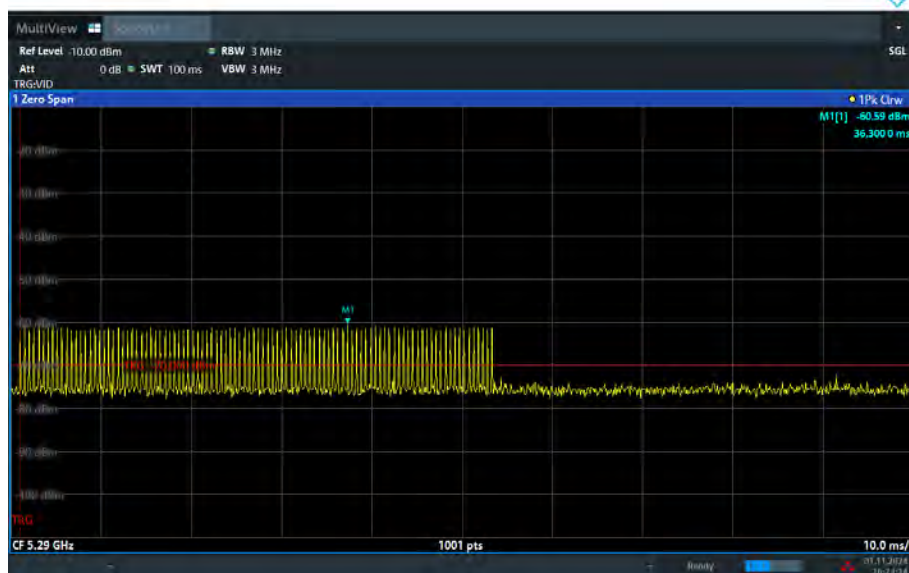


802.11be EHT80_ 5290 MHz

Short Pulse Radar
Type 2

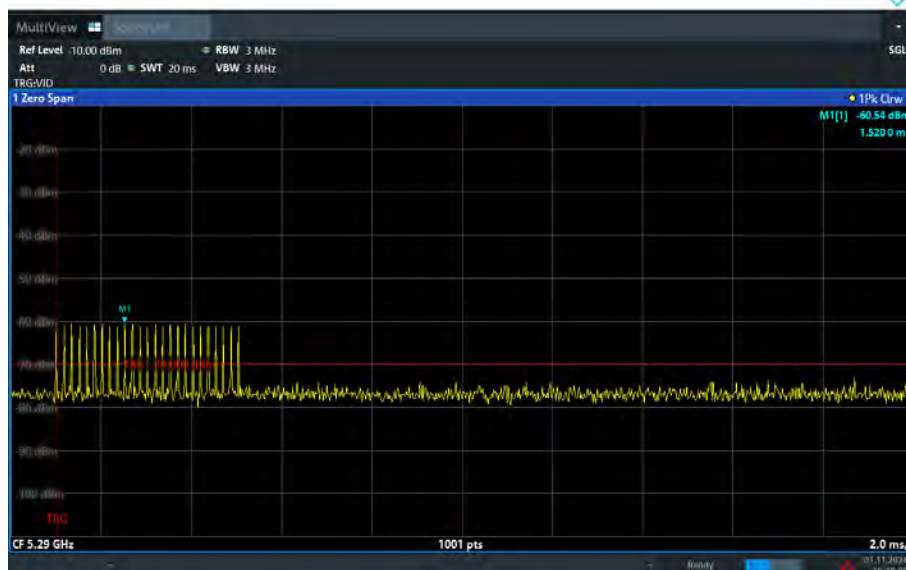


Short Pulse Radar
Type 3

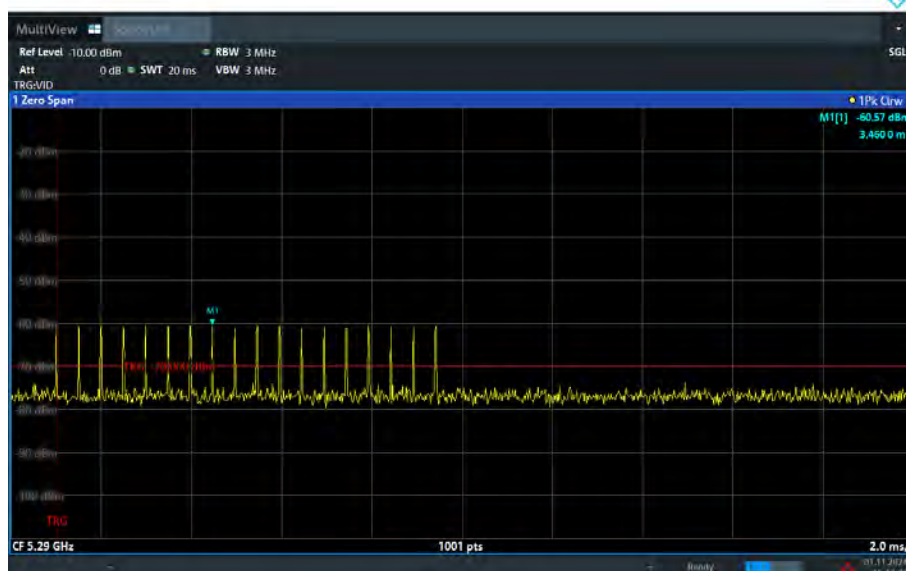


802.11be EHT80_ 5290 MHz

Short Pulse Radar
Type 4

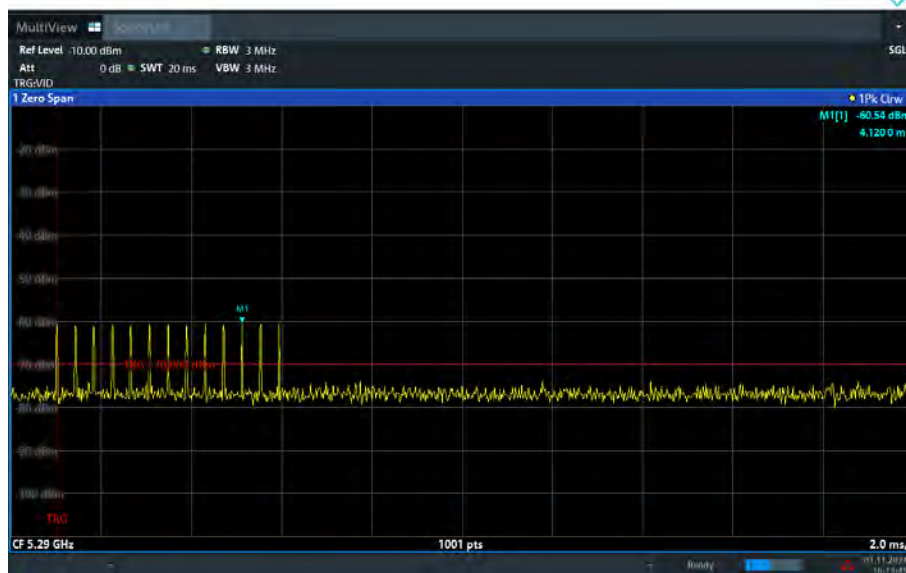


Long Pulse Radar
Type 5

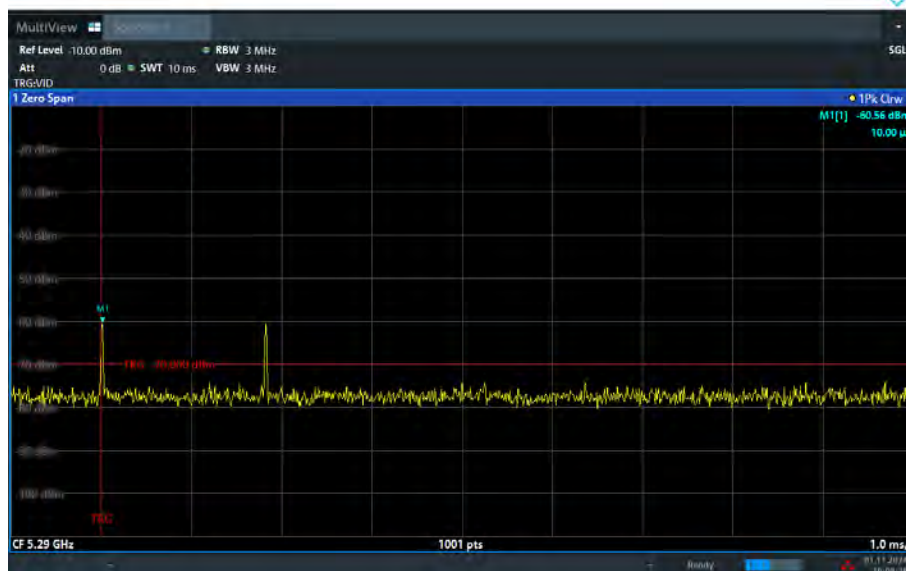


802.11be EHT80_ 5290 MHz

Frequency Hopping
Radar
Type 6

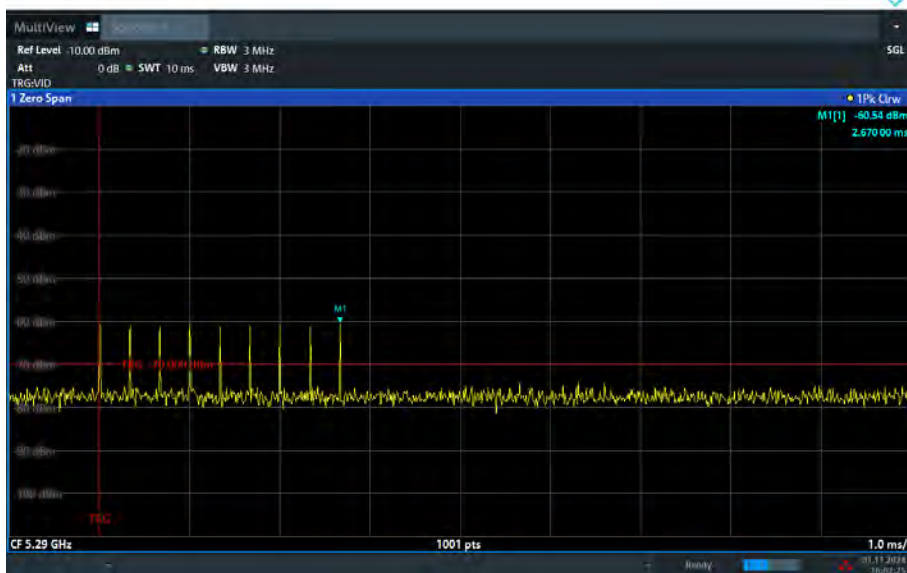


802.11be EHT160_ 5250 MHz

Short Pulse Radar
Type 0

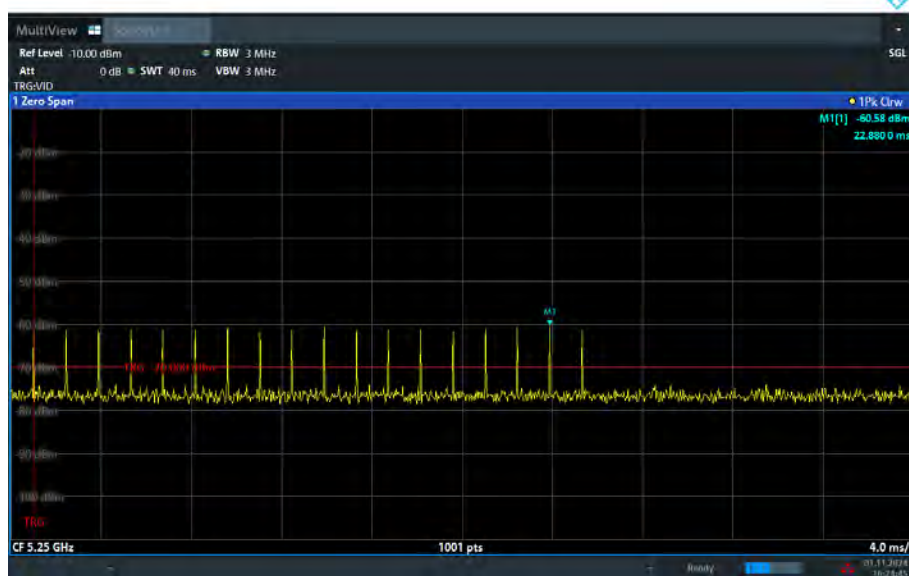


Short Pulse Radar
Type 1

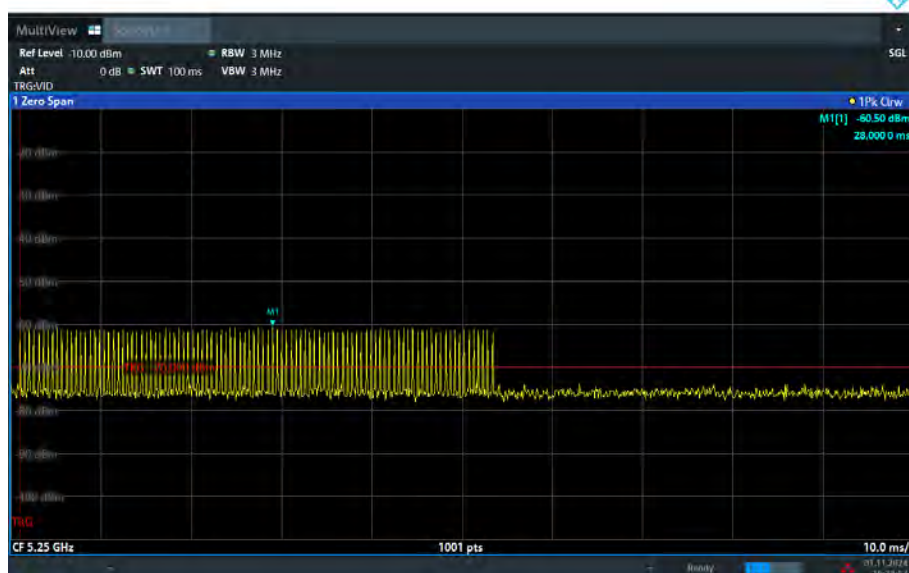


802.11be EHT160_ 5250 MHz

Short Pulse Radar
Type 2

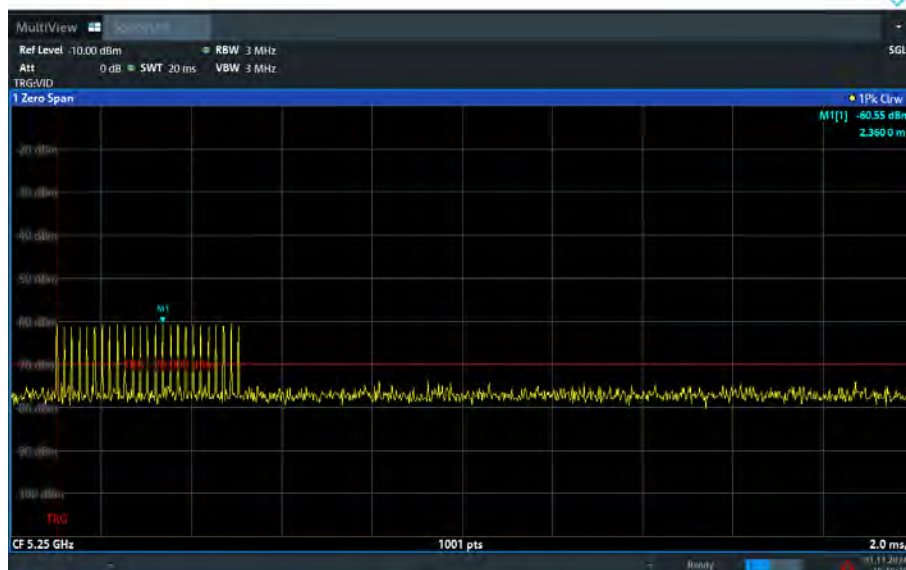


Short Pulse Radar
Type 3

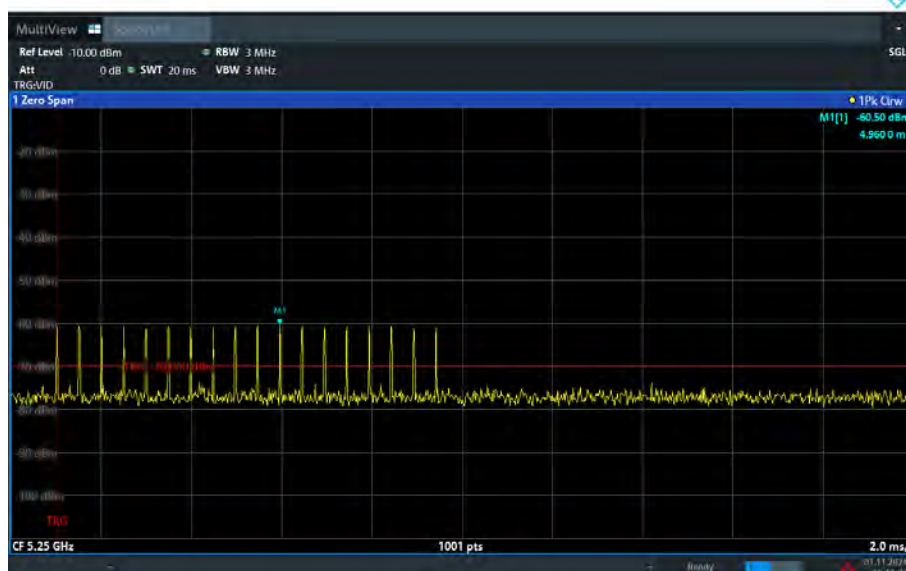

802.11be EHT160_ 5250 MHz

Short Pulse Radar
Type 4

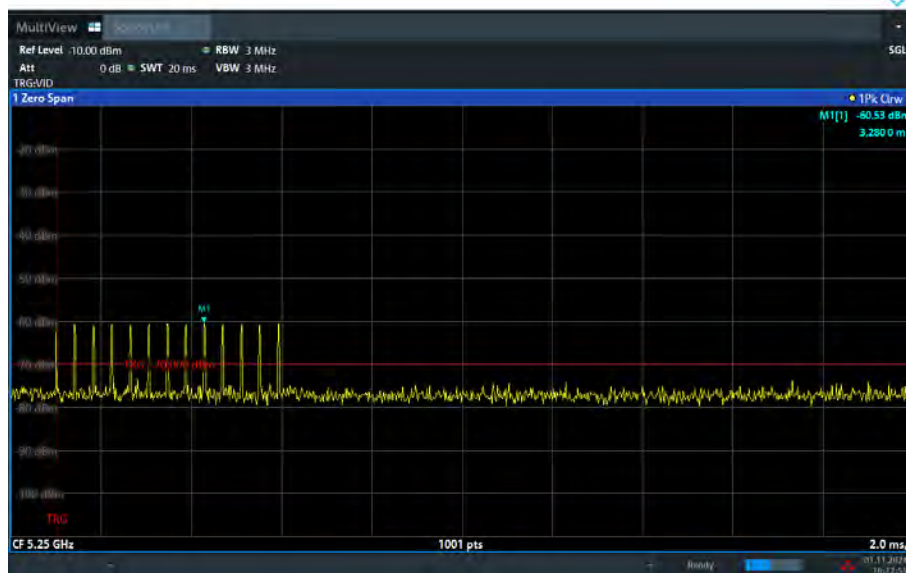


Long Pulse Radar
Type 5




802.11be EHT160_ 5250 MHz

Frequency Hopping
Radar
Type 6

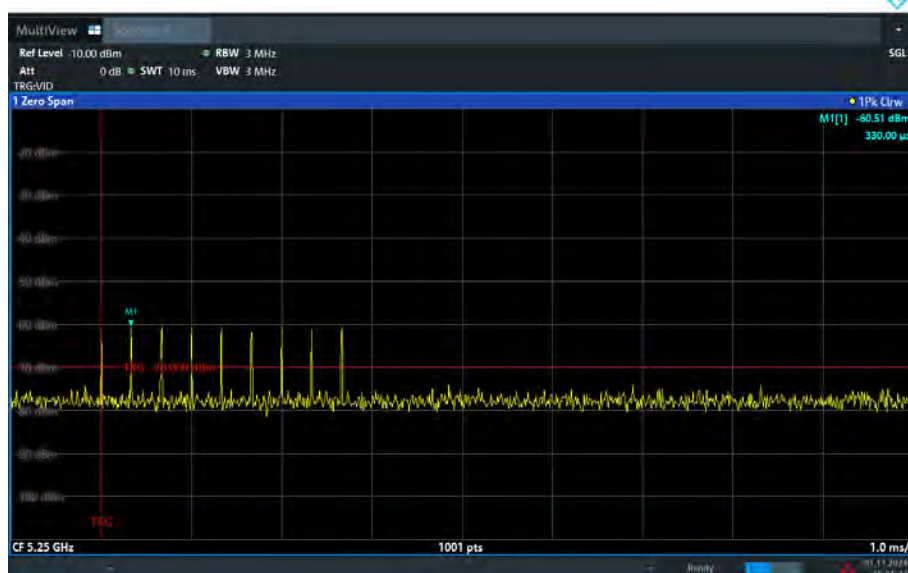

802.11be EHT160_ 5250 MHz


Traffic

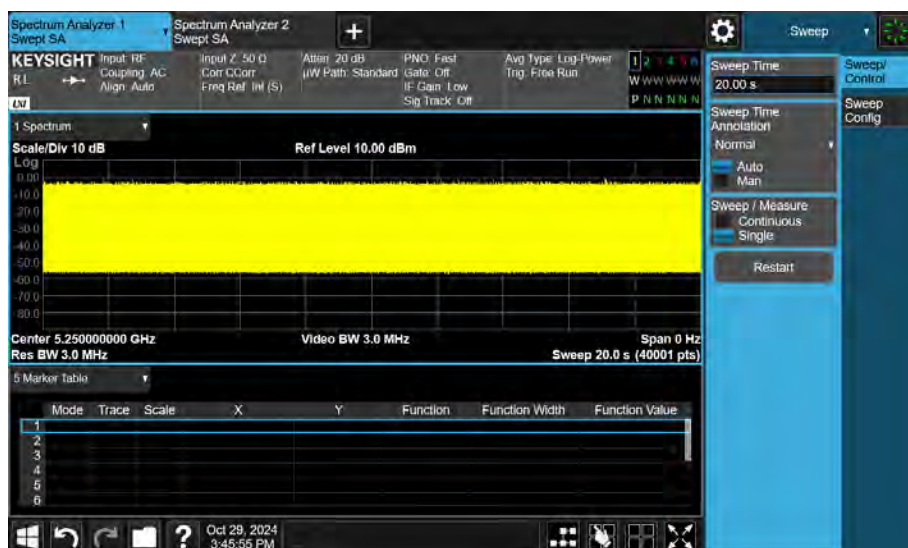

5.2. Channel Loading

■ Duty cycle $\geq 17\%$

802.11be EHT20

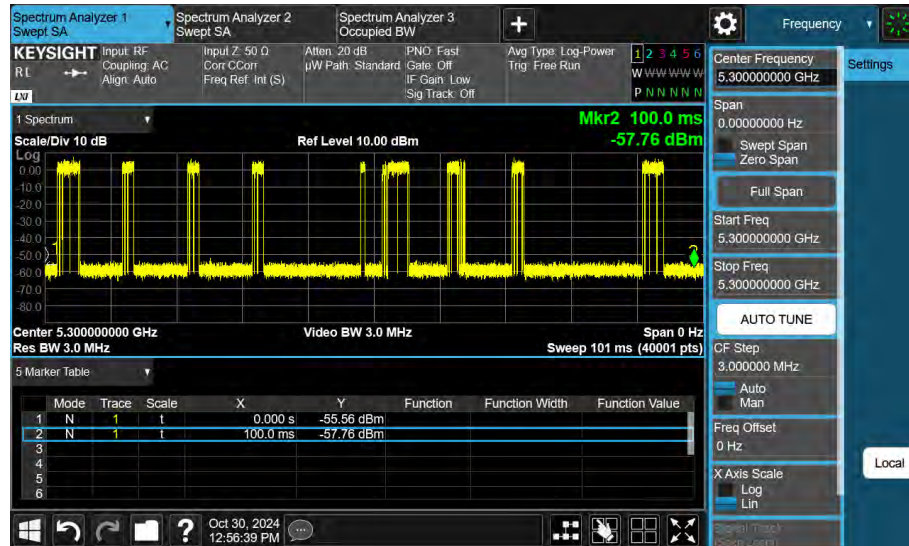

DFS and Adaptivity


Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-50	0	100.00ms	100.00ms
On Time Point: Total Point: Sum of On Time(s):			
7602	39474	19.26ms	
Sweep Time(s): Sweep Point: Duty Cycle(%):			
101.33ms	40001	19.26%	

eurofins

RUN

802.11be EHT40

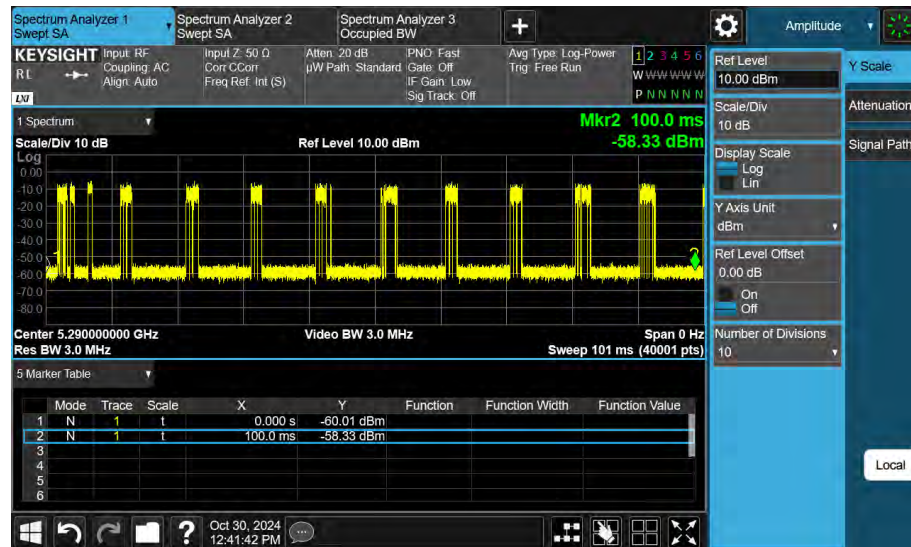

DFS and Adaptivity


Device

Trigger Level(dBm): MK1 Time(s): MK2 Time(s): Delta Time(s):

On Time Point: Total Point: Sum of On Time(s):

Sweep Time(s): Sweep Point: Duty Cycle(%):

802.11be EHT80

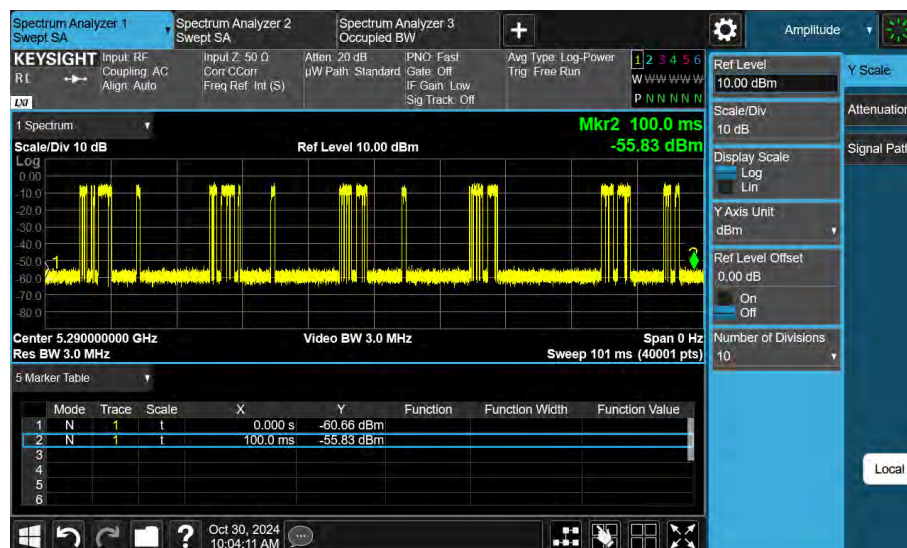

DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-50	0	100.00ms	100.00ms


On Time Point:	Total Point:	Sum of On Time(s):
7883	39474	19.97ms

Sweep Time(s):	Sweep Point:	Duty Cycle(%):
101.33ms	40001	19.97%

euofins

RUN

802.11be EHT160

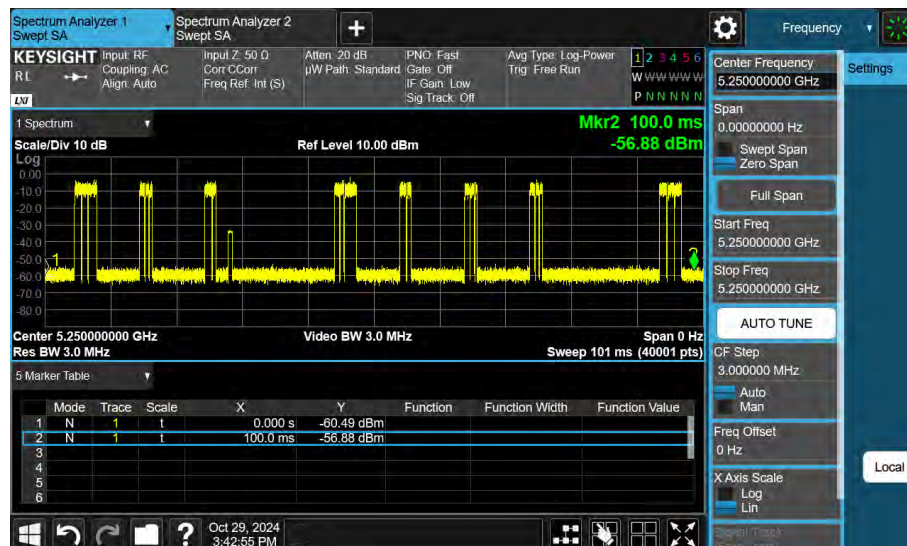

DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-40	0	100.00ms	100.00ms
On Time Point: Total Point: Sum of On Time(s):			
7411	39474	18.77ms	
Sweep Time(s): Sweep Point: Duty Cycle(%):			
101.33ms	40001	18.77%	

eurofins

RUN

5.3. Channel Availability Check Time

5.3.1. Procedure to Determine Initial Power-Up Cycle Time

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

5.3.2. Procedure for Timing Of Radar Burst

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

5.3.3. Qualitative Results

Timing of Radar Burst	Display on Control Computer	Spectrum Analyzer Display
No Radar Triggered	EUT marks Channel as active	Transmissions begin on channel after completion of the initial power-up cycle and the CAC
Within 0 to 6 second window	EUT indicates radar detected	No transmissions on channel
Within 54 to 60 second window	EUT indicates radar detected	No transmissions on channel

802.11be EHT160_ 5250 MHz

Initial Channel
Availability Check




Initial Channel
Availability Check
Begin



802.11be EHT160_ 5250 MHz

Initial Channel
Availability Check
End

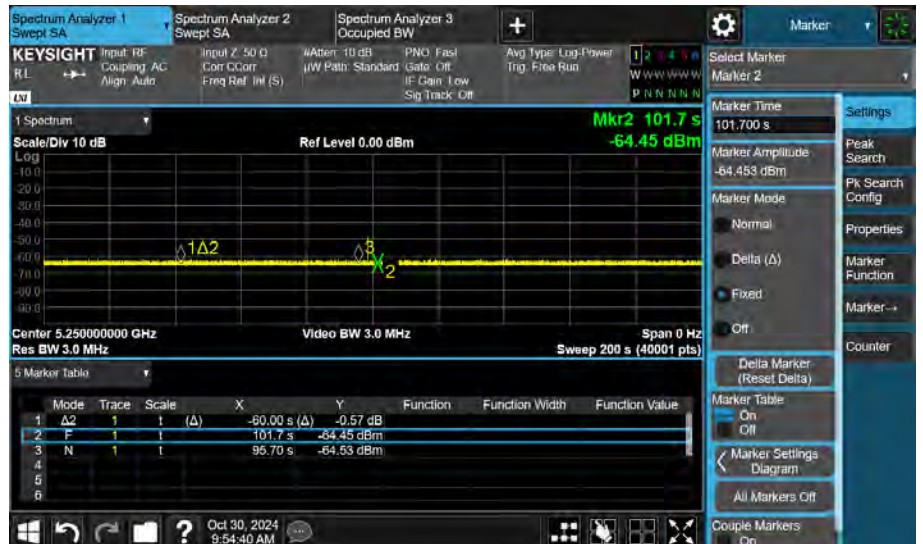

5.4. Channel Move Time and Channel Closing Transmission Time

5.4.1. Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.
This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = (Number of analyzer bins showing transmission) * (dwell time per bin)

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.


Results

Frequency (MHz)	Radar Type	Channel Move Time (msec)	Limit (sec)
5250	Type 0	445.0	10

Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
5250	Type 0	9.0	60

802.11be EHT160_ 5250 MHz

Channel Move and
Closing Time

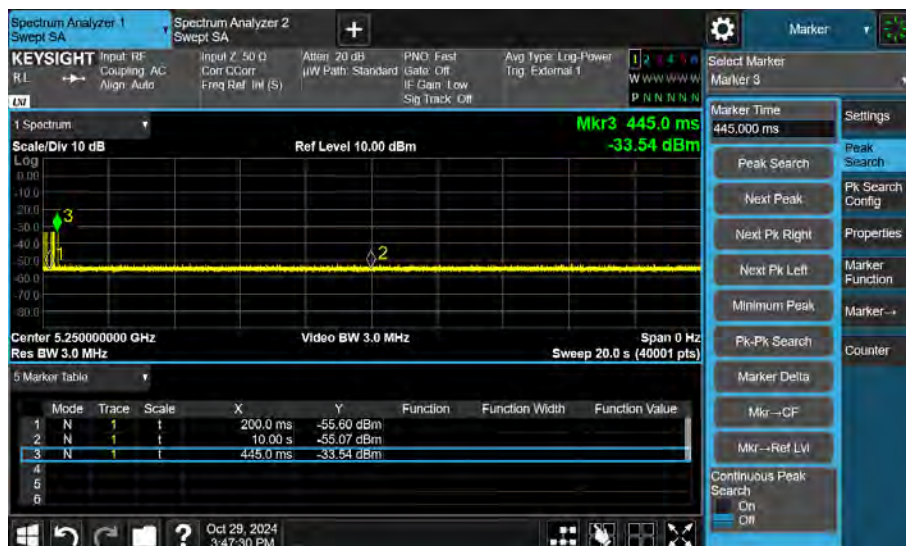

DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-50	200.00ms	10000.00ms	9800.00ms

On Time Point:	Total Point:	Sum of On Time(s):
18	19600	9.00ms

Sweep Time(s):	Sweep Point:	Duty Cycle(%):
20000.00ms	40001	0.09%

RUN

5.5. Non-Occupancy Period



Note: Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

5.6. U-NII Detection Bandwidth

■ Test Results

Test Mode						
802.11be EHT20						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5300	5290	5310	20	17.763	112.59	≥ 100

Test Mode						
802.11be EHT40						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5310	5290	5330	40	36.482	109.64	≥ 100

Test Mode						
802.11be EHT80						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5290	5250	5330	80	75.887	105.42	≥ 100


Test Mode						
802.11be EHT160						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5250	5250	5330	80	77.888	102.71	≥ 100

Test Graphs


802.11be EHT20_ 5300 MHz



802.11be EHT40_ 5310 MHz

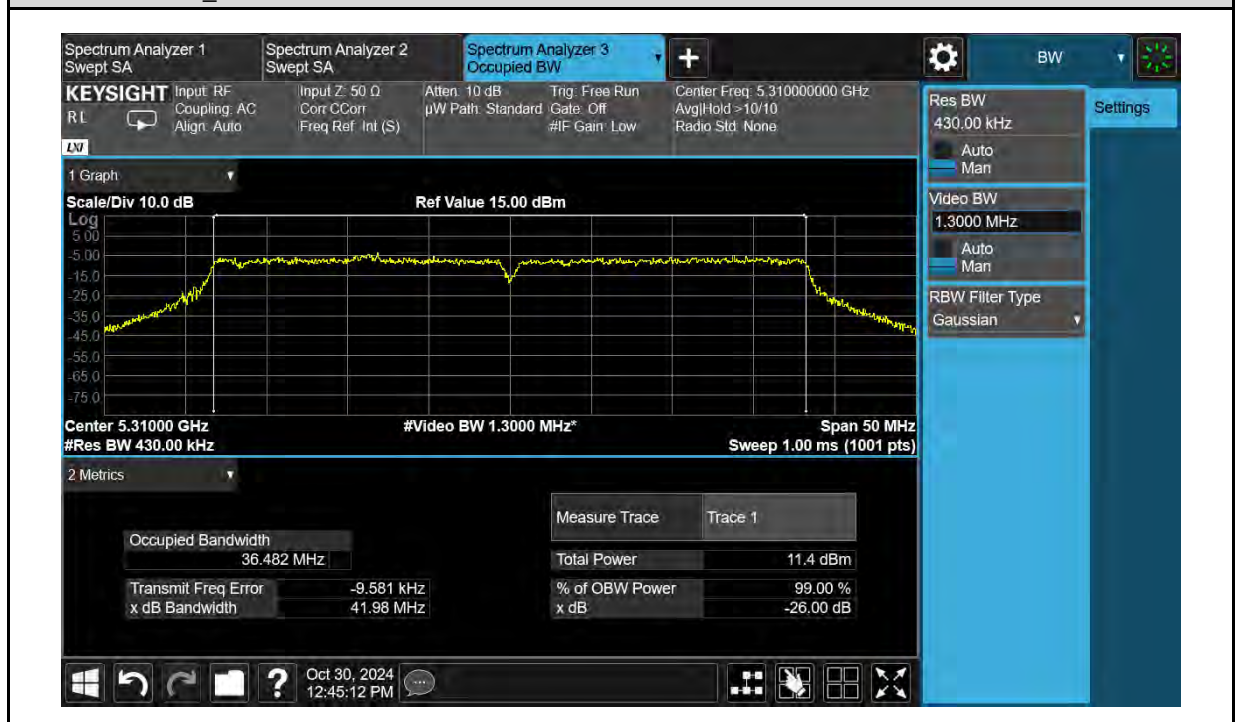

802.11be EHT80_ 5290 MHz

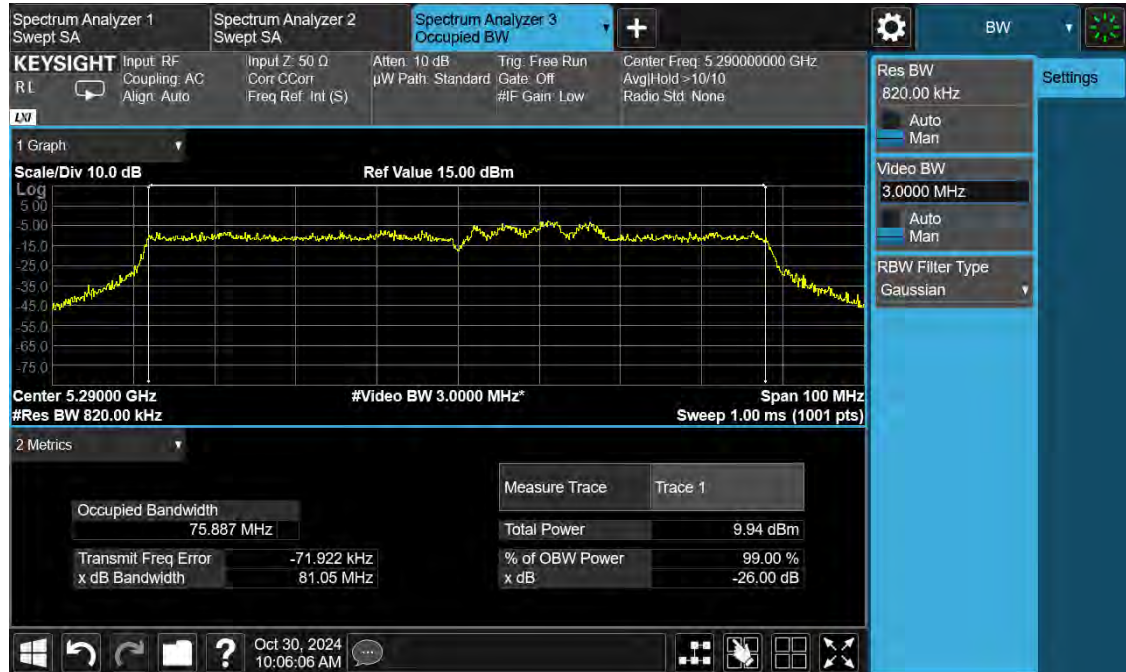

802.11be EHT160_ 5250 MHz



5.7. Statistical Performance check

■ Test Results

Test Mode		802.11be EHT20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5300	Type1	Table 5a	1	27	3	90.00%	≥ 60%
	Type2	Random	Random	25	5	83.33%	≥ 60%
	Type3	Random	Random	28	2	93.33%	≥ 60%
	Type4	Random	Random	27	3	90.00%	≥ 60%
	Type1~4					89.17%	≥ 80%
	Type5	Random	Random	27	3	90.00%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5310	Type1	Table 5a	1	27	3	90.00%	≥ 60%
	Type2	Random	Random	27	3	90.00%	≥ 60%
	Type3	Random	Random	27	3	90.00%	≥ 60%
	Type4	Random	Random	26	4	86.67%	≥ 60%
	Type1~4					89.17%	≥ 80%
	Type5	Random	Random	26	4	86.67%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5290	Type1	Table 5a	1	29	1	96.67%	≥ 60%
	Type2	Random	Random	29	1	96.67%	≥ 60%
	Type3	Random	Random	28	2	93.33%	≥ 60%
	Type4	Random	Random	28	2	93.33%	≥ 60%
	Type1~4					95.00%	≥ 80%
	Type5	Random	Random	27	3	90.00%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT160					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5250	Type1	Table 5a	1	28	2	93.33%	≥ 60%
	Type2	Random	Random	27	3	90.00%	≥ 60%
	Type3	Random	Random	29	1	96.67%	≥ 60%
	Type4	Random	Random	29	1	96.67%	≥ 60%
	Type1~4					94.17%	≥ 80%
	Type5	Random	Random	28	2	93.33%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	1	858	62	1166	1
2	5300	1	3066	18	326	1
3	5300	1	698	76	1433	1
4	5300	1	798	67	1253	1
5	5300	1	678	78	1475	1
6	5300	1	838	63	1193	0
7	5300	1	938	57	1066	0
8	5300	1	678	78	1475	1
9	5300	1	838	63	1193	1
10	5300	1	798	67	1253	1
11	5300	1	558	95	1792	1
12	5300	1	3066	18	326	1
13	5300	1	678	78	1475	1
14	5300	1	618	86	1618	1
15	5300	1	618	86	1618	1
16	5300	1	2114	25	473	1
17	5300	1	2525	21	396	1
18	5300	1	1229	43	814	1
19	5300	1	1230	43	813	1
20	5300	1	1783	30	561	1
21	5300	1	2088	26	479	1
22	5300	1	2757	20	363	1
23	5300	1	2702	20	370	1
24	5300	1	1952	28	512	1
25	5300	1	2464	22	406	0
26	5300	1	2307	23	433	1
27	5300	1	1495	36	669	1
28	5300	1	2379	23	420	1
29	5300	1	2209	24	453	1
30	5300	1	658	81	1520	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	3.20	220.50	26	4535	0
2	5300	2.80	185.80	27	5382	1
3	5300	3.40	224.90	26	4446	1
4	5300	1.90	192.40	26	5198	1
5	5300	2.70	159.00	28	6289	0
6	5300	3.10	214.40	23	4664	1
7	5300	3.30	174.90	24	5718	1
8	5300	3.40	172.20	25	5807	1
9	5300	1.20	185.70	23	5385	1
10	5300	4.20	218.40	28	4579	1
11	5300	1.00	169.10	29	5914	1
12	5300	2.60	226.30	26	4419	1
13	5300	4.50	217.10	28	4606	1
14	5300	3.80	192.90	27	5184	1
15	5300	3.40	179.40	25	5574	0
16	5300	1.70	206.70	26	4838	0
17	5300	3.60	215.70	24	4636	1
18	5300	2.60	150.10	26	6662	1
19	5300	1.10	229.30	28	4361	1
20	5300	1.50	221.60	26	4513	1
21	5300	3.70	181.90	23	5498	1
22	5300	3.00	150.10	29	6662	1
23	5300	1.30	209.80	29	4766	1
24	5300	3.20	179.10	28	5583	1
25	5300	1.10	211.50	25	4728	1
26	5300	1.70	218.00	24	4587	1
27	5300	3.60	230.00	23	4348	1
28	5300	2.90	216.00	24	4630	0
29	5300	3.70	218.70	27	4572	1
30	5300	3.50	198.50	24	5038	1
Detection Percentage (%)						83.33

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	9.20	404.10	16	2474.63	1
2	5300	7.30	474.80	16	2106.15	1
3	5300	8.50	378.60	16	2641.31	1
4	5300	6.10	334.80	18	2986.86	1
5	5300	9.90	240.20	16	4163.20	1
6	5300	7.00	258.10	17	3874.47	1
7	5300	7.00	255.80	18	3909.30	1
8	5300	6.20	417.10	17	2397.51	1
9	5300	6.60	352.50	16	2836.88	1
10	5300	9.80	382.20	17	2616.43	1
11	5300	6.60	380.20	16	2630.19	1
12	5300	7.40	209.90	17	4764.17	1
13	5300	9.80	442.10	16	2261.93	1
14	5300	8.60	360.80	18	2771.62	1
15	5300	7.80	212.20	18	4712.54	1
16	5300	7.20	459.60	17	2175.81	1
17	5300	7.20	346.00	18	2890.17	1
18	5300	8.90	400.20	17	2498.75	1
19	5300	9.30	417.10	17	2397.51	1
20	5300	6.70	276.40	16	3617.95	1
21	5300	6.50	274.60	16	3641.66	1
22	5300	7.70	203.00	16	4926.11	1
23	5300	6.20	313.40	18	3190.81	1
24	5300	6.70	235.80	16	4240.88	1
25	5300	9.70	207.20	17	4826.25	1
26	5300	9.40	230.40	16	4340.28	0
27	5300	6.80	462.20	18	2163.57	1
28	5300	7.80	387.70	16	2579.31	1
29	5300	7.40	368.90	17	2710.76	0
30	5300	8.70	331.90	16	3012.96	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	11.80	220.40	12	4537	1
2	5300	11.90	422.90	15	2365	1
3	5300	15.00	280.90	15	3560	1
4	5300	13.50	234.70	14	4261	1
5	5300	17.00	426.80	15	2343	1
6	5300	17.90	259.10	12	3860	1
7	5300	16.60	254.50	15	3929	1
8	5300	12.20	215.10	12	4649	1
9	5300	18.20	425.60	12	2350	1
10	5300	16.50	237.60	15	4209	1
11	5300	12.20	384.60	16	2600	1
12	5300	15.00	201.80	14	4955	1
13	5300	15.30	353.10	13	2832	0
14	5300	13.00	226.90	14	4407	0
15	5300	17.90	457.40	12	2186	1
16	5300	17.40	201.40	13	4965	1
17	5300	15.60	454.40	13	2201	1
18	5300	18.00	336.50	14	2972	1
19	5300	13.30	488.70	14	2046	1
20	5300	11.30	430.30	12	2324	1
21	5300	13.40	437.40	15	2286	0
22	5300	12.80	428.20	15	2335	1
23	5300	18.50	367.60	16	2720	1
24	5300	16.70	496.80	13	2013	1
25	5300	15.90	372.90	15	2682	1
26	5300	19.00	451.10	16	2217	1
27	5300	13.40	426.30	16	2346	1
28	5300	12.90	320.10	16	3124	1
29	5300	18.80	294.30	14	3398	1
30	5300	11.10	280.10	14	3570	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5297	1	91.5	16	1814.7	2	1
	5298	2	89.7	17	1718.4	2	
	5296	3	92.7	13	1420.1	3	
	5297	4	58.8	16	1775.2	3	
	5293	5	97.4	5	1913.6	1	
	5295	6	65.1	9	1542.6	2	
	5296	7	97.2	12	1358.0	3	
	5293	8	52.2	6	1819.5	2	
	5296	9	98.4	13	1920.4	1	
	5298	10	81.8	17	1815.5	1	
	5297	11	73.2	16	1135.3	3	
2	5298	1	84.2	18	1719.2	3	1
	5297	2	59.9	15	1213.6	1	
	5296	3	91.4	13	1324.5	2	
	5298	4	88.7	18	1806.6	2	
	5298	5	65.4	18	1585.5	3	
	5297	6	75.5	15	1158.4	3	
	5299	7	59.2	19	1280.5	3	
	5297	8	58.8	15	1183.5	2	
	5294	9	50.6	7	1457.7	2	
	5299	10	86.2	19	1764.3	1	
	5294	11	54.9	8	1715.0	3	
	5296	12	82.0	12	1709.0	2	
3	5294	1	84.2	7	1490.4	3	1
	5293	2	85.8	6	1711.0	1	
	5295	3	92.5	11	1358.9	1	
	5293	4	55.3	6	1191.4	2	
	5295	5	74.5	9	1005.7	1	
	5298	6	91.3	18	1783.9	3	
	5293	7	68.2	6	1002.3	2	
	5293	8	98.6	5	1668.9	3	
	5296	9	91.2	13	1669.6	1	
	5297	10	55.7	16	1115.4	1	
	5297	11	75.9	15	1893.1	3	
	5299	12	57.3	20	1457.3	2	
	5296	13	50.4	12	1214.0	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5297	1	92.0	14	1021.3	1	0
	5293	2	78.5	5	1756.4	1	
	5295	3	81.2	10	1112.6	2	
	5295	4	83.4	11	1872.0	1	
	5296	5	53.2	13	1155.9	1	
	5299	6	76.9	19	1409.6	2	
	5295	7	71.9	9	1216.2	1	
	5295	8	71.0	9	1848.6	3	
	5297	9	63.3	14	1511.4	1	
5	5299	1	59.5	19	1286.5	3	1
	5296	2	83.6	13	1132.9	2	
	5296	3	94.9	13	1212.7	1	
	5295	4	65.9	11	1649.9	1	
	5294	5	98.4	7	1143.0	2	
	5293	6	58.3	6	1541.3	2	
	5295	7	85.0	10	1908.9	2	
	5299	8	69.6	19	1975.4	2	
	5295	9	80.2	11	1618.3	2	
	5294	10	97.8	7	1416.0	2	
	5297	11	73.2	16	1478.1	2	
	5294	12	76.2	8	1686.9	2	
	5297	13	96.8	15	1637.0	2	
	5294	14	82.4	8	1480.7	2	
	5294	15	78.5	8	1903.7	2	
6	5295	1	74.9	11	1959.9	1	0
	5296	2	85.0	12	1343.0	3	
	5295	3	63.6	9	1158.9	2	
	5294	4	84.3	8	1730.4	1	
	5295	5	60.7	11	1736.8	3	
	5297	6	83.0	14	1329.7	1	
	5295	7	52.3	11	1527.3	2	
	5295	8	76.2	9	1377.4	1	
	5297	9	73.6	16	1490.7	1	
	5296	10	61.6	12	1968.7	2	
	5299	11	88.2	19	1589.0	3	
	5298	12	55.8	18	1027.5	3	
	5298	13	65.6	18	1514.9	3	
	5298	14	64.6	17	1683.2	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5298	1	94.1	17	1941.3	3	1
	5297	2	65.5	14	1879.5	1	
	5293	3	94.4	6	1950.2	1	
	5296	4	87.4	13	1404.8	2	
	5295	5	74.8	11	1031.0	2	
	5296	6	67.9	12	1052.7	1	
	5294	7	60.7	8	1356.2	2	
	5294	8	61.3	8	1096.1	1	
	5298	9	74.5	17	1706.7	2	
	5296	10	84.9	13	1133.0	1	
	5296	11	66.0	12	1990.0	1	
	5298	12	69.2	17	1133.6	2	
	5298	13	64.0	18	1365.3	2	
	5294	14	72.9	8	1043.3	2	
	5295	15	77.5	9	1806.1	3	
	5298	16	80.2	17	1657.5	2	
	5297	17	79.7	16	1970.0	1	
8	5296	1	68.5	12	1242.2	2	1
	5294	2	60.8	7	1741.1	3	
	5297	3	96.2	14	1914.1	1	
	5297	4	73.4	16	1073.4	3	
	5297	5	68.9	14	1574.9	1	
	5298	6	69.5	17	1322.3	3	
	5296	7	72.9	12	1319.9	3	
	5298	8	54.1	17	1536.7	1	
	5293	9	72.6	6	1447.1	2	
	5299	10	56.3	20	1957.3	3	
	5295	11	66.6	9	1279.2	3	
	5298	12	62.8	18	1692.1	1	
	5296	13	65.7	13	1518.6	1	
	5298	14	63.9	18	1242.7	2	
	5295	15	75.5	9	1916.9	1	
	5294	16	88.5	8	1801.6	2	
	5295	17	83.3	9	1298.8	3	
	5297	18	91.2	14	1485.0	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5297	1	79.5	14	1916.4	3	1
	5299	2	99.6	19	1893.5	3	
	5293	3	86.1	6	1981.3	2	
	5295	4	82.1	11	1502.3	3	
	5297	5	80.6	14	1546.9	3	
	5293	6	52.5	6	1267.4	3	
	5297	7	89.8	14	1907.9	3	
	5298	8	50.1	18	1924.0	1	
	5297	9	96.8	15	1178.3	3	
	5298	10	95.2	18	1869.0	1	
	5298	11	50.9	17	1414.0	2	
	5295	12	95.9	11	1644.6	3	
	5297	13	63.3	15	1424.4	3	
	5299	14	87.4	19	1271.3	1	
	5295	15	92.0	9	1685.5	2	
	5295	16	92.6	11	1297.3	3	
	5299	17	88.5	20	1948.3	3	
	5299	18	85.0	19	1816.1	1	
	5295	19	69.1	11	1510.4	2	
10	5296	1	64.3	12	1297.0	3	1
	5297	2	91.6	14	1482.3	2	
	5298	3	93.2	18	1127.8	2	
	5299	4	80.0	20	1820.3	1	
	5298	5	63.2	18	1242.6	1	
	5295	6	52.3	11	1634.3	1	
	5293	7	95.4	6	1840.6	3	
	5297	8	95.3	14	1359.1	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5300	1	68.2	14	1092.9	2	1
	5300	2	63.9	12	1876.4	3	
	5300	3	59.4	11	1425.5	3	
	5300	4	69.9	11	1808.6	1	
	5300	5	70.9	11	1961.8	2	
	5300	6	84.4	7	1719.2	3	
	5300	7	67.8	7	1683.2	2	
	5300	8	61.9	16	1827.7	2	
	5300	9	57.8	10	1508.3	3	
	5300	10	87.7	20	1297.0	3	
	5300	11	90.2	16	1584.8	1	
	5300	12	77.4	17	1575.3	3	
	5300	13	67.2	7	1204.7	1	
	5300	14	62.1	19	1328.1	1	
	5300	15	58.4	13	1634.1	3	
	5300	16	94.6	9	1847.8	3	
12	5300	1	71.5	17	1788.5	2	1
	5300	2	96.9	16	1843.5	3	
	5300	3	79.1	15	1765.1	1	
	5300	4	95.0	20	1082.3	2	
	5300	5	75.9	18	1414.1	1	
	5300	6	91.6	15	1687.3	2	
	5300	7	70.4	12	1094.9	2	
	5300	8	65.9	19	1858.2	3	
	5300	9	72.0	6	1726.2	1	
	5300	10	82.8	7	1334.0	3	
	5300	11	87.3	18	1307.5	2	
	5300	12	87.9	9	1549.1	3	
	5300	13	70.2	11	1569.4	3	
	5300	14	60.0	12	1515.6	3	
	5300	15	96.6	14	1549.1	1	
	5300	16	72.3	5	1152.8	1	
	5300	17	71.2	19	1606.7	2	
	5300	18	85.7	16	1493.6	2	
	5300	19	51.4	15	1323.2	1	
	5300	20	52.8	5	1361.9	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5300	1	72.7	17	1346.8	1	1
	5300	2	81.6	12	1446.2	2	
	5300	3	92.3	11	1362.6	3	
	5300	4	50.7	18	1786.3	3	
	5300	5	73.7	11	1107.4	2	
	5300	6	61.8	8	1601.0	1	
	5300	7	83.9	18	1526.2	1	
	5300	8	54.8	17	1174.9	2	
	5300	9	58.5	8	1962.0	3	
	5300	10	92.7	19	1324.3	2	
14	5300	1	99.7	19	1249.1	2	1
	5300	2	85.8	7	1833.2	2	
	5300	3	73.1	6	1549.3	3	
	5300	4	86.4	15	1358.3	1	
	5300	5	82.4	9	1901.7	2	
	5300	6	66.1	16	1126.1	2	
	5300	7	94.3	16	1578.3	2	
	5300	8	94.3	8	1383.3	2	
	5300	9	71.1	16	1031.7	2	
	5300	10	77.9	11	1367.1	2	
	5300	11	85.2	18	1228.8	3	
	5300	12	74.1	20	1893.6	2	
	5300	13	52.6	9	1624.9	2	
	5300	14	66.7	8	1374.3	1	
	5300	15	54.1	5	1029.7	2	
	5300	16	52.9	16	1096.6	3	
	5300	17	76.7	17	1192.4	1	
	5300	18	61.3	13	1229.7	1	
	5300	19	92.8	5	1129.5	2	
	5300	20	51.4	10	1058.5	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5300	1	89.8	19	1354.5	3	1
	5300	2	84.8	16	1347.0	1	
	5300	3	93.8	18	1580.5	1	
	5300	4	56.8	16	1280.1	1	
	5300	5	82.2	16	1508.2	1	
	5300	6	69.2	6	1840.0	1	
	5300	7	72.6	13	1796.5	2	
	5300	8	61.7	14	1023.7	2	
	5300	9	54.3	13	1200.3	3	
	5300	10	71.8	17	1646.0	2	
	5300	11	96.2	14	1936.5	1	
	5300	12	54.1	15	1123.3	2	
	5300	13	73.5	15	1162.6	1	
	5300	14	76.8	17	1942.2	3	
	5300	15	92.6	6	1061.8	2	
	5300	16	93.3	12	1329.5	1	
	5300	17	72.1	17	1033.0	2	
	5300	18	79.2	20	1251.1	3	
	5300	19	78.7	17	1618.5	2	
16	5300	1	79.7	13	1529.6	2	0
	5300	2	90.2	7	1641.4	3	
	5300	3	79.6	12	1386.3	2	
	5300	4	65.1	14	1324.3	3	
	5300	5	79.6	11	1924.3	2	
	5300	6	76.1	12	1268.9	2	
	5300	7	57.4	14	1840.4	3	
	5300	8	84.2	10	1673.8	1	
	5300	9	59.9	6	1756.8	2	
	5300	10	54.2	13	1803.0	2	
	5300	11	52.2	20	1499.2	2	
	5300	12	61.6	19	1393.4	3	
	5300	13	90.1	19	1009.2	2	
	5300	14	78.6	18	1446.1	2	
	5300	15	95.6	15	1496.0	1	
	5300	16	85.2	16	1200.3	3	
	5300	17	50.6	20	1988.3	1	
	5300	18	69.9	15	1404.9	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5300	1	69.0	14	1791.7	3	1
	5300	2	88.8	20	1518.8	3	
	5300	3	68.5	14	1968.5	1	
	5300	4	93.6	10	1235.2	3	
	5300	5	78.0	14	1764.2	1	
	5300	6	67.7	9	1441.6	3	
	5300	7	78.5	8	1083.6	1	
	5300	8	65.2	16	1053.9	1	
	5300	9	77.1	16	1082.2	2	
	5300	10	85.5	16	1514.6	1	
	5300	11	80.1	20	1923.9	3	
	5300	12	79.1	9	1284.0	3	
	5300	13	81.5	15	1690.0	1	
	5300	14	95.7	10	1830.2	3	
	5300	15	91.9	15	1303.6	3	
	5300	16	77.3	12	1903.0	1	
	5300	17	50.8	5	1598.9	1	
18	5300	1	66.7	19	1375.3	1	1
	5300	2	76.3	8	1010.2	1	
	5300	3	78.5	14	1938.6	1	
	5300	4	83.2	11	1034.7	3	
	5300	5	84.6	12	1201.4	1	
	5300	6	90.7	6	1321.6	3	
	5300	7	82.5	20	1602.4	1	
	5300	8	97.7	17	1959.0	1	
	5300	9	52.6	6	1597.7	3	
	5300	10	55.0	20	1282.2	1	
	5300	11	71.2	13	1720.4	2	
	5300	12	91.8	15	1880.3	2	
	5300	13	93.5	18	1199.2	1	
	5300	14	63.8	5	1143.9	1	
	5300	15	83.0	17	1247.7	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5300	1	64.9	13	1922.4	2	1
	5300	2	85.9	6	1839.9	3	
	5300	3	92.4	5	1201.2	3	
	5300	4	79.5	6	1109.4	2	
	5300	5	59.6	9	1792.3	1	
	5300	6	87.4	10	1449.4	2	
	5300	7	84.5	19	1700.6	2	
	5300	8	80.5	11	1844.0	3	
	5300	9	96.1	6	1448.7	1	
	5300	10	73.7	18	1381.2	3	
	5300	11	78.4	17	1401.0	1	
	5300	12	90.9	8	1885.9	3	
	5300	13	77.0	9	1679.0	1	
	5300	14	70.0	10	1515.1	1	
20	5300	1	85.0	15	1941.4	2	1
	5300	2	55.1	8	1125.1	3	
	5300	3	75.1	16	1119.3	2	
	5300	4	59.6	18	1664.3	1	
	5300	5	56.2	9	1521.8	3	
	5300	6	56.9	7	1296.2	3	
	5300	7	73.9	9	1239.3	1	
	5300	8	68.1	11	1363.0	2	
	5300	9	51.5	12	1693.1	3	
	5300	10	71.2	9	1202.7	3	
21	5307	1	57.5	6	1866.7	1	1
	5301	2	75.8	20	1179.7	2	
	5304	3	83.7	13	1106.4	2	
	5302	4	92.3	18	1994.2	2	
	5304	5	81.2	13	1391.1	2	
	5305	6	88.0	9	1637.4	2	
	5301	7	62.8	19	1833.3	2	
	5302	8	72.2	18	1487.5	1	
	5307	9	90.4	6	1392.6	1	
	5306	10	66.3	7	1709.9	1	
	5305	11	88.5	9	1959.3	1	
	5303	12	76.4	14	1884.5	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5302	1	73.5	17	1049.4	2	1
	5304	2	53.4	13	1022.0	1	
	5302	3	99.0	17	1012.1	2	
	5303	4	96.0	14	1042.3	1	
	5304	5	83.3	12	1315.5	1	
	5302	6	79.5	18	1889.8	3	
	5307	7	57.6	5	1086.5	3	
	5304	8	77.8	12	1592.9	2	
	5305	9	58.7	10	1969.5	2	
23	5301	1	64.2	19	1991.8	2	1
	5306	2	60.0	7	1446.9	3	
	5304	3	52.5	12	1604.9	3	
	5306	4	93.1	8	1679.6	3	
	5305	5	86.5	10	1387.0	2	
	5302	6	92.6	18	1635.8	1	
	5302	7	82.6	18	1529.2	1	
	5306	8	62.3	7	1792.1	2	
	5305	9	93.2	9	1283.3	3	
	5303	10	50.1	14	1336.4	1	
	5302	11	55.9	18	1239.8	1	
	5303	12	59.5	14	1152.9	3	
	5302	13	81.5	17	1200.8	2	
	5302	14	55.2	18	1420.3	1	
	5305	15	55.1	11	1643.9	1	
24	5305	1	56.9	9	1216.2	1	1
	5305	2	82.9	10	1432.7	3	
	5305	3	99.4	11	1987.7	1	
	5302	4	73.9	18	1070.5	2	
	5302	5	99.9	17	1940.5	3	
	5306	6	93.5	8	1240.4	3	
	5302	7	52.3	17	1844.7	2	
	5305	8	76.4	11	1611.6	2	
	5304	9	67.8	13	1680.1	3	
	5303	10	68.5	15	1645.5	3	
	5303	11	61.4	16	1054.1	1	
	5303	12	83.1	16	1781.9	1	
	5305	13	75.0	10	1811.7	1	
	5301	14	76.5	19	1578.3	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5303	1	64.4	14	1632.9	3	1
	5305	2	70.8	9	1212.6	1	
	5302	3	72.0	17	1794.6	2	
	5305	4	58.4	10	1495.4	1	
	5303	5	51.4	14	1752.5	1	
	5304	6	59.5	13	1967.9	3	
	5306	7	91.5	7	1314.0	1	
	5301	8	71.4	19	1852.8	2	
	5301	9	58.4	19	1760.8	2	
	5301	10	94.1	19	1525.3	2	
	5305	11	53.2	9	1875.9	3	
	5301	12	78.0	20	1019.1	2	
	5301	13	69.1	19	1418.2	3	
	5302	14	99.2	17	1929.1	2	
	5302	15	66.4	18	1703.7	1	
	5302	16	72.4	17	1364.2	2	
	5303	17	63.7	14	1204.5	2	
	5305	18	94.5	10	1167.7	2	
26	5302	1	81.0	17	1230.8	1	1
	5303	2	74.6	14	1776.5	1	
	5306	3	63.3	8	1385.0	3	
	5304	4	79.6	13	1777.9	3	
	5301	5	76.7	20	1466.2	3	
	5307	6	53.3	6	1615.3	1	
	5303	7	66.3	14	1749.5	2	
	5303	8	58.7	16	1769.7	1	
	5305	9	75.8	11	1678.7	1	
	5306	10	90.4	7	1175.8	3	
	5306	11	97.1	8	1108.5	1	
	5303	12	69.8	14	1733.8	2	
	5303	13	85.0	15	1903.9	2	
	5306	14	72.3	7	1544.3	3	
	5303	15	60.2	15	1051.8	2	
	5305	16	84.1	11	1069.7	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5306	1	66.3	7	1677.9	3	1
	5303	2	53.3	16	1328.1	2	
	5306	3	71.1	7	1941.5	1	
	5303	4	93.7	16	1088.8	2	
	5301	5	93.9	19	1980.9	2	
	5302	6	57.8	17	1454.9	1	
	5301	7	81.8	20	1476.4	2	
	5303	8	66.4	16	1932.1	1	
	5301	9	68.7	19	1566.1	3	
	5302	10	88.8	17	1091.7	3	
	5301	11	51.0	19	1052.0	3	
	5303	12	60.2	14	1536.4	3	
	5303	13	52.5	16	1412.4	2	
	5305	14	82.5	9	1028.9	1	
	5305	15	50.8	10	1220.0	1	
	5301	16	72.0	19	1044.2	3	
	5302	17	78.1	18	1168.6	2	
	5303	18	51.3	16	1917.7	2	
	5305	19	64.8	10	1162.3	1	
	5303	20	79.2	15	1138.8	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5305	1	51.0	11	1705.6	2	1
	5307	2	75.3	6	1613.1	1	
	5306	3	77.7	8	1119.4	2	
	5303	4	60.0	15	1114.4	1	
	5304	5	53.3	12	1666.4	2	
	5306	6	94.6	7	1842.6	2	
	5306	7	69.1	8	1616.1	2	
	5301	8	98.0	20	1986.2	3	
	5304	9	92.1	13	1236.8	1	
	5305	10	53.8	9	1690.0	2	
	5305	11	75.6	9	1193.5	1	
	5303	12	89.8	14	1493.0	1	
	5307	13	76.0	5	1253.0	3	
	5305	14	70.3	11	1560.8	2	
	5306	15	78.8	7	1921.3	2	
	5305	16	51.6	10	1551.0	2	
	5303	17	58.9	15	1487.3	3	
	5302	18	66.4	18	1817.7	3	
	5301	19	93.9	19	1250.7	2	
	5306	20	56.4	7	1028.2	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5305	1	91.1	11	1205.0	3	1
	5303	2	64.1	16	1319.0	2	
	5302	3	54.7	18	1774.3	3	
	5303	4	61.2	14	1103.3	1	
	5301	5	63.1	19	1098.3	3	
	5305	6	76.3	9	1676.9	2	
	5301	7	77.5	19	1689.9	3	
	5301	8	51.8	19	1967.3	3	
	5306	9	64.5	7	1755.3	3	
	5302	10	69.2	17	1263.2	2	
	5305	11	64.4	10	1429.2	1	
	5304	12	89.1	13	1306.4	2	
	5305	13	90.6	11	1069.4	1	
	5301	14	70.6	20	1692.6	2	
	5306	15	97.0	8	1759.9	3	
	5301	16	62.3	19	1258.3	1	
	5303	17	99.6	16	1930.5	1	
30	5305	1	76.6	10	1558.4	1	1
	5305	2	69.0	11	1057.0	2	
	5303	3	90.7	15	1453.9	3	
	5305	4	52.9	9	1844.5	1	
	5306	5	81.7	7	1591.7	1	
	5303	6	63.6	14	1484.7	3	
	5305	7	94.4	11	1731.7	3	
	5306	8	88.4	8	1748.3	1	
	5303	9	64.0	16	1334.2	1	
	5306	10	53.9	8	1981.8	1	
	5305	11	65.3	11	1227.2	1	
	5306	12	67.6	8	1809.6	1	
	5304	13	97.7	12	1963.7	2	
	5301	14	72.3	19	1107.4	3	
Detection Percentage (%)							90.00

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	5300	1	333	9	0.333	300
2	5300	1	333	9	0.333	300
3	5300	1	333	9	0.333	300
4	5300	1	333	9	0.333	300
5	5300	1	333	9	0.333	300
6	5300	1	333	9	0.333	300
7	5300	1	333	9	0.333	300
8	5300	1	333	9	0.333	300
9	5300	1	333	9	0.333	300
10	5300	1	333	9	0.333	300
11	5300	1	333	9	0.333	300
12	5300	1	333	9	0.333	300
13	5300	1	333	9	0.333	300
14	5300	1	333	9	0.333	300
15	5300	1	333	9	0.333	300
16	5300	1	333	9	0.333	300
17	5300	1	333	9	0.333	300
18	5300	1	333	9	0.333	300
19	5300	1	333	9	0.333	300
20	5300	1	333	9	0.333	300
21	5300	1	333	9	0.333	300
22	5300	1	333	9	0.333	300
23	5300	1	333	9	0.333	300
24	5300	1	333	9	0.333	300
25	5300	1	333	9	0.333	300
26	5300	1	333	9	0.333	300
27	5300	1	333	9	0.333	300
28	5300	1	333	9	0.333	300
29	5300	1	333	9	0.333	300
30	5300	1	333	9	0.333	300
Detection Percentage (%)						100.00

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1	698	76	1433	1
2	5310	1	518	102	1931	1
3	5310	1	858	62	1166	1
4	5310	1	778	68	1285	0
5	5310	1	878	61	1139	1
6	5310	1	858	62	1166	1
7	5310	1	898	59	1114	1
8	5310	1	538	99	1859	1
9	5310	1	558	95	1792	1
10	5310	1	838	63	1193	1
11	5310	1	698	76	1433	1
12	5310	1	798	67	1253	1
13	5310	1	758	70	1319	1
14	5310	1	678	78	1475	1
15	5310	1	798	67	1253	1
16	5310	1	1632	33	613	1
17	5310	1	2169	25	461	0
18	5310	1	2573	21	389	1
19	5310	1	2182	25	458	1
20	5310	1	1304	41	767	1
21	5310	1	2202	24	454	1
22	5310	1	2380	23	420	0
23	5310	1	2300	23	435	1
24	5310	1	736	72	1359	1
25	5310	1	1817	30	550	1
26	5310	1	2565	21	390	1
27	5310	1	1099	49	910	1
28	5310	1	847	63	1181	1
29	5310	1	643	83	1555	1
30	5310	1	1776	30	563	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	2.20	222.20	27	4500	1
2	5310	3.40	167.60	29	5967	1
3	5310	4.10	172.10	28	5811	0
4	5310	1.60	194.90	23	5131	1
5	5310	4.60	229.20	23	4363	1
6	5310	3.60	160.90	26	6215	0
7	5310	1.70	214.80	27	4655	1
8	5310	3.40	170.30	25	5872	1
9	5310	4.00	188.50	26	5305	1
10	5310	4.20	225.20	29	4440	1
11	5310	3.30	184.30	23	5426	1
12	5310	1.70	162.70	29	6146	1
13	5310	3.80	228.90	27	4369	1
14	5310	2.20	213.00	23	4695	1
15	5310	3.20	161.60	28	6188	1
16	5310	3.00	176.50	29	5666	1
17	5310	2.80	152.10	25	6575	1
18	5310	3.50	153.10	27	6532	1
19	5310	1.60	214.40	25	4664	1
20	5310	2.60	154.40	24	6477	1
21	5310	4.70	211.70	26	4724	1
22	5310	4.60	211.40	29	4730	1
23	5310	4.50	223.90	29	4466	1
24	5310	3.10	155.30	27	6439	1
25	5310	4.50	151.40	23	6605	1
26	5310	5.00	180.10	26	5552	1
27	5310	1.20	167.80	27	5959	1
28	5310	2.70	223.20	25	4480	1
29	5310	2.00	195.30	25	5120	0
30	5310	4.40	156.50	24	6390	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	6.90	453.70	17	2204.10	0
2	5310	7.30	245.10	18	4079.97	1
3	5310	8.40	413.80	16	2416.63	1
4	5310	7.50	462.70	16	2161.23	0
5	5310	6.50	449.60	18	2224.20	1
6	5310	6.40	423.00	17	2364.07	1
7	5310	7.40	221.10	18	4522.84	1
8	5310	9.00	241.80	17	4135.65	1
9	5310	9.20	378.50	18	2642.01	1
10	5310	6.40	458.30	18	2181.98	1
11	5310	6.40	316.30	17	3161.56	1
12	5310	6.50	244.90	16	4083.30	1
13	5310	7.60	448.30	18	2230.65	1
14	5310	9.50	318.40	18	3140.70	1
15	5310	8.90	225.80	16	4428.70	1
16	5310	8.10	290.80	18	3438.79	1
17	5310	7.70	471.00	18	2123.14	1
18	5310	7.30	336.20	18	2974.42	1
19	5310	8.60	353.80	17	2826.46	1
20	5310	7.70	342.90	17	2916.30	1
21	5310	9.60	336.00	18	2976.19	1
22	5310	8.40	304.40	18	3285.15	1
23	5310	9.70	268.80	16	3720.24	1
24	5310	6.50	294.80	17	3392.13	1
25	5310	8.90	288.60	18	3465.00	1
26	5310	9.20	454.40	17	2200.70	1
27	5310	6.40	289.10	18	3459.01	1
28	5310	6.30	321.60	17	3109.45	1
29	5310	9.80	475.50	17	2103.05	1
30	5310	6.40	461.70	17	2165.91	0
Detection Percentage (%)						90.00

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	15.80	315.40	12	3171	1
2	5310	13.40	482.40	15	2073	0
3	5310	13.70	467.30	15	2140	1
4	5310	15.80	374.10	14	2673	1
5	5310	19.00	202.80	13	4931	1
6	5310	16.10	355.00	13	2817	1
7	5310	19.80	365.30	12	2737	1
8	5310	18.40	213.50	12	4684	1
9	5310	15.70	207.10	13	4829	1
10	5310	15.30	465.10	16	2150	0
11	5310	12.60	378.60	16	2641	1
12	5310	16.60	476.30	14	2100	1
13	5310	12.90	474.00	13	2110	1
14	5310	12.60	289.10	15	3459	1
15	5310	12.90	349.00	12	2865	0
16	5310	11.90	364.50	15	2743	1
17	5310	13.50	256.20	13	3903	1
18	5310	14.10	374.00	13	2674	1
19	5310	11.40	449.20	14	2226	1
20	5310	19.60	458.80	16	2180	0
21	5310	16.30	223.40	16	4476	1
22	5310	17.80	310.50	13	3221	1
23	5310	11.40	402.20	12	2486	1
24	5310	12.60	203.20	16	4921	1
25	5310	15.70	477.00	12	2096	1
26	5310	18.90	451.80	15	2213	1
27	5310	14.10	298.00	14	3356	1
28	5310	19.90	360.90	16	2771	1
29	5310	18.40	259.40	13	3855	1
30	5310	18.40	384.50	13	2601	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5299.5	1	82.4	20	1408.7	2	1
	5293.5	2	74.7	6	1789.6	3	
	5295.5	3	92.6	9	1940.6	2	
	5297.5	4	54.5	14	1876.3	2	
	5296.5	5	99.9	13	1609.8	1	
	5299.5	6	71.3	19	1481.6	1	
	5297.5	7	55.6	14	1281.2	2	
	5296.5	8	69.4	12	1941.0	3	
	5293.5	9	63.5	6	1593.5	2	
	5295.5	10	53.7	10	1269.8	3	
	5299.5	11	80.3	19	1644.2	3	
2	5293.5	1	51.3	6	1319.9	1	0
	5298.5	2	91.3	17	1817.6	1	
	5293.5	3	55.3	6	1149.8	1	
	5293.5	4	72.6	6	1420.0	3	
	5296.5	5	96.3	12	1312.9	3	
	5295.5	6	72.8	10	1204.0	3	
	5295.5	7	76.0	11	1423.9	1	
	5295.5	8	61.6	9	1964.9	3	
	5299.5	9	77.9	19	1626.1	3	
	5293.5	10	80.1	6	1181.2	3	
	5298.5	11	70.8	18	1365.7	3	
	5293.5	12	71.6	5	1200.4	2	
3	5293.5	1	99.3	5	1171.0	1	0
	5297.5	2	70.1	14	1199.2	3	
	5294.5	3	84.6	7	1160.6	1	
	5295.5	4	61.9	9	1019.3	1	
	5298.5	5	70.8	18	1110.3	2	
	5295.5	6	72.8	11	1244.1	3	
	5296.5	7	71.3	12	1854.0	2	
	5298.5	8	63.7	18	1209.2	2	
	5296.5	9	51.0	12	1561.8	1	
	5299.5	10	75.8	20	1447.6	1	
	5296.5	11	96.1	12	1162.0	2	
	5295.5	12	80.0	9	1310.7	1	
	5294.5	13	54.4	8	1595.3	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5295.5	1	93.3	9	1535.5	2	1
	5295.5	2	50.7	10	1439.5	3	
	5297.5	3	76.0	14	1574.2	3	
	5299.5	4	64.3	20	1387.5	1	
	5295.5	5	91.6	11	1195.1	1	
	5298.5	6	77.2	17	1791.9	3	
	5298.5	7	71.1	18	1393.0	2	
	5296.5	8	54.0	13	1028.8	2	
	5295.5	9	62.3	9	1601.9	2	
5	5296.5	1	73.4	13	1017.1	1	1
	5294.5	2	79.6	8	1844.7	3	
	5296.5	3	77.6	12	1045.7	2	
	5298.5	4	61.1	18	1985.6	2	
	5294.5	5	67.4	7	1369.5	3	
	5298.5	6	61.1	17	1183.6	1	
	5297.5	7	59.3	15	1833.5	3	
	5296.5	8	81.9	12	1776.8	1	
	5296.5	9	94.1	13	1316.8	2	
	5294.5	10	66.0	7	1971.3	1	
	5296.5	11	92.4	12	1842.8	3	
	5299.5	12	76.9	20	1102.6	1	
	5294.5	13	61.0	8	1570.7	1	
	5297.5	14	76.9	14	1765.9	2	
	5297.5	15	96.0	16	1517.2	2	
6	5293.5	1	90.8	6	1989.0	2	1
	5296.5	2	95.9	12	1105.1	1	
	5295.5	3	52.6	9	1908.6	3	
	5297.5	4	90.0	15	1743.2	2	
	5297.5	5	93.8	15	1976.7	2	
	5299.5	6	71.2	19	1483.9	2	
	5297.5	7	88.3	16	1132.7	2	
	5295.5	8	96.9	9	1063.4	1	
	5298.5	9	89.6	17	1705.9	3	
	5294.5	10	87.4	7	1031.1	1	
	5293.5	11	83.3	6	1164.0	1	
	5295.5	12	83.1	11	1934.0	1	
	5294.5	13	99.5	7	1410.3	2	
	5295.5	14	82.3	9	1967.1	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5298.5	1	70.2	17	1382.7	2	1
	5295.5	2	90.1	9	1689.3	2	
	5293.5	3	52.9	6	1226.4	3	
	5298.5	4	94.5	17	1424.6	3	
	5295.5	5	75.7	9	1233.2	1	
	5297.5	6	82.9	15	1995.5	2	
	5294.5	7	90.2	7	1806.5	2	
	5298.5	8	58.9	18	1406.5	2	
	5297.5	9	85.5	15	1073.4	1	
	5298.5	10	75.6	17	1298.4	3	
	5294.5	11	58.2	7	1176.6	3	
	5299.5	12	58.0	19	1198.4	1	
	5297.5	13	70.8	14	1874.7	3	
	5299.5	14	93.4	19	1284.4	3	
	5295.5	15	79.6	11	1739.4	2	
	5297.5	16	61.9	15	1051.5	1	
	5298.5	17	95.4	18	1393.2	3	
8	5298.5	1	50.3	17	1069.6	3	1
	5299.5	2	67.3	19	1182.2	1	
	5295.5	3	79.3	10	1309.3	2	
	5295.5	4	91.8	11	1821.1	2	
	5293.5	5	72.0	5	1983.6	3	
	5299.5	6	85.4	19	1634.8	2	
	5296.5	7	62.2	12	1023.0	1	
	5298.5	8	67.4	18	1013.9	1	
	5296.5	9	72.6	12	1273.2	3	
	5296.5	10	74.5	13	1619.7	2	
	5293.5	11	97.6	6	1487.6	2	
	5298.5	12	62.0	18	1340.6	1	
	5298.5	13	72.6	17	1056.2	3	
	5298.5	14	66.5	18	1158.8	3	
	5297.5	15	51.0	14	1876.0	3	
	5294.5	16	82.3	7	1714.2	1	
	5298.5	17	89.2	17	1655.7	1	
	5297.5	18	65.9	14	1919.9	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5293.5	1	89.6	5	1562.7	1	1
	5297.5	2	82.5	14	1461.2	3	
	5296.5	3	94.0	13	1606.9	3	
	5297.5	4	73.8	16	1297.9	1	
	5298.5	5	78.6	17	1312.9	2	
	5293.5	6	91.6	6	1613.1	1	
	5299.5	7	52.6	20	1836.1	3	
	5298.5	8	98.8	18	1893.1	1	
	5296.5	9	83.6	12	1993.7	2	
	5299.5	10	88.4	19	1850.6	1	
	5296.5	11	69.3	13	1588.9	2	
	5295.5	12	67.6	11	1802.7	1	
	5294.5	13	90.4	8	1586.0	2	
	5297.5	14	57.0	16	1491.7	3	
	5294.5	15	90.3	7	1889.3	1	
	5297.5	16	56.1	16	1553.0	1	
	5295.5	17	98.5	11	1900.3	2	
	5295.5	18	63.4	10	1515.4	3	
	5294.5	19	96.3	7	1091.1	3	
10	5297.5	1	73.0	14	1543.5	2	1
	5296.5	2	90.8	12	1350.7	3	
	5295.5	3	93.1	9	1472.9	1	
	5296.5	4	69.8	12	1125.9	1	
	5293.5	5	87.5	6	1087.0	3	
	5294.5	6	90.0	8	1481.3	2	
	5295.5	7	74.2	10	1935.9	2	
	5295.5	8	63.8	11	1094.2	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5310	1	77.0	15	1313.9	3	1
	5310	2	91.0	17	1607.1	1	
	5310	3	93.2	15	1152.7	2	
	5310	4	83.7	14	1849.1	2	
	5310	5	92.4	17	1188.3	3	
	5310	6	75.6	8	1202.7	2	
	5310	7	98.2	7	1514.4	1	
	5310	8	55.6	16	1172.3	3	
	5310	9	76.0	10	1238.9	2	
	5310	10	62.1	14	1804.4	2	
	5310	11	94.5	7	1082.9	2	
	5310	12	94.7	11	1351.3	3	
	5310	13	92.5	12	1986.6	2	
	5310	14	64.0	19	1542.3	2	
	5310	15	80.2	18	1619.4	2	
	5310	16	86.2	10	1524.7	2	
12	5310	1	61.9	9	1245.9	1	1
	5310	2	59.6	10	1867.5	1	
	5310	3	60.6	6	1132.8	2	
	5310	4	67.8	6	1799.9	1	
	5310	5	56.0	11	1068.0	1	
	5310	6	61.5	13	1629.1	3	
	5310	7	87.9	8	1729.7	2	
	5310	8	54.6	5	1771.5	3	
	5310	9	52.2	13	1587.2	2	
	5310	10	68.4	15	1487.3	2	
	5310	11	78.2	13	1337.0	3	
	5310	12	97.8	7	1917.1	2	
	5310	13	59.6	6	1635.8	2	
	5310	14	60.9	11	1375.8	2	
	5310	15	71.3	16	1956.9	1	
	5310	16	63.5	7	1925.5	2	
	5310	17	80.9	7	1016.2	1	
	5310	18	70.9	12	1296.2	1	
	5310	19	75.7	18	1000.4	1	
	5310	20	73.5	12	1160.5	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5310	1	96.0	11	1870.9	3	1
	5310	2	69.2	10	1298.9	1	
	5310	3	88.8	15	1946.3	1	
	5310	4	67.6	5	1255.9	1	
	5310	5	73.5	15	1207.5	1	
	5310	6	55.2	19	1681.0	3	
	5310	7	62.0	18	1506.3	3	
	5310	8	98.0	15	1725.6	2	
	5310	9	63.2	8	1665.3	1	
	5310	10	81.2	8	1469.2	1	
14	5310	1	81.0	10	1857.1	3	1
	5310	2	98.8	16	1179.7	3	
	5310	3	85.3	18	1209.2	1	
	5310	4	86.0	8	1029.7	3	
	5310	5	96.1	8	1720.7	1	
	5310	6	95.2	9	1280.0	1	
	5310	7	56.7	5	1559.9	3	
	5310	8	54.1	17	1757.7	1	
	5310	9	54.0	13	1260.2	1	
	5310	10	61.8	13	1829.3	2	
	5310	11	61.2	16	1574.2	2	
	5310	12	87.8	13	1296.9	2	
	5310	13	68.5	7	1724.1	2	
	5310	14	52.4	19	1179.7	3	
	5310	15	83.3	6	1487.2	1	
	5310	16	76.1	11	1181.7	3	
	5310	17	95.9	15	1905.2	1	
	5310	18	69.4	19	1086.0	2	
	5310	19	80.9	17	1242.6	3	
	5310	20	60.4	16	1305.2	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5310	1	98.9	11	1826.2	2	1
	5310	2	60.5	10	1160.6	1	
	5310	3	73.3	10	1649.9	3	
	5310	4	85.3	9	1093.0	2	
	5310	5	70.8	18	1258.5	2	
	5310	6	64.7	6	1959.5	3	
	5310	7	84.0	9	1855.3	1	
	5310	8	99.7	9	1101.3	2	
	5310	9	64.7	14	1813.8	2	
	5310	10	75.0	12	1464.5	2	
	5310	11	50.6	9	1785.2	1	
	5310	12	56.4	10	1648.0	3	
	5310	13	65.8	8	1296.0	3	
	5310	14	73.5	6	1318.8	1	
	5310	15	68.2	5	1028.4	1	
	5310	16	88.7	17	1867.1	3	
	5310	17	82.4	14	1606.2	2	
	5310	18	57.7	13	1221.5	3	
	5310	19	75.0	20	1348.8	1	
16	5310	1	89.9	17	1470.1	3	1
	5310	2	62.7	8	1120.0	3	
	5310	3	54.6	11	1352.7	1	
	5310	4	96.3	12	1068.1	3	
	5310	5	56.3	15	1515.9	2	
	5310	6	90.2	9	1611.4	2	
	5310	7	70.2	13	1872.5	2	
	5310	8	88.5	6	1886.8	1	
	5310	9	76.9	18	1196.0	2	
	5310	10	53.2	16	1821.6	2	
	5310	11	69.9	14	1819.8	3	
	5310	12	94.2	6	1979.9	1	
	5310	13	67.9	7	1396.6	3	
	5310	14	65.9	11	1004.5	1	
	5310	15	71.9	9	1183.1	3	
	5310	16	60.2	9	1593.8	2	
	5310	17	81.8	14	1727.4	3	
	5310	18	77.5	19	1336.3	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5310	1	70.5	11	1451.5	1	1
	5310	2	72.3	13	1859.1	2	
	5310	3	78.7	15	1091.6	2	
	5310	4	56.6	15	1565.6	3	
	5310	5	82.3	10	1372.3	2	
	5310	6	50.9	17	1868.9	2	
	5310	7	84.7	14	1621.1	1	
	5310	8	58.7	7	1495.6	2	
	5310	9	87.1	17	1661.8	1	
	5310	10	53.0	19	1624.2	3	
	5310	11	81.8	18	1030.7	3	
	5310	12	80.3	7	1633.6	1	
	5310	13	90.1	9	1091.8	2	
	5310	14	76.0	14	1208.8	3	
	5310	15	89.1	19	1534.2	2	
	5310	16	84.4	7	1010.9	1	
	5310	17	79.3	17	1599.3	1	
18	5310	1	94.6	9	1557.2	3	1
	5310	2	92.2	13	1657.5	3	
	5310	3	86.1	17	1323.7	2	
	5310	4	62.7	15	1462.0	3	
	5310	5	83.4	17	1654.7	3	
	5310	6	61.1	8	1666.4	3	
	5310	7	64.4	10	1809.9	3	
	5310	8	95.5	10	1698.1	2	
	5310	9	86.2	13	1314.4	1	
	5310	10	56.4	13	1812.8	2	
	5310	11	68.8	10	1907.2	2	
	5310	12	64.8	7	1559.8	1	
	5310	13	75.2	20	1048.9	2	
	5310	14	81.7	11	1813.7	1	
	5310	15	52.4	13	1547.3	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5310	1	80.2	12	1655.7	1	1
	5310	2	84.3	9	1029.6	1	
	5310	3	65.2	15	1969.4	1	
	5310	4	86.6	19	1858.8	2	
	5310	5	62.9	14	1398.3	1	
	5310	6	54.6	11	1413.6	2	
	5310	7	91.2	11	1671.0	3	
	5310	8	52.1	10	1069.4	3	
	5310	9	78.6	9	1311.8	2	
	5310	10	77.6	9	1604.0	3	
	5310	11	95.2	8	1135.5	3	
	5310	12	80.0	10	1858.6	3	
	5310	13	76.1	14	1631.4	2	
	5310	14	78.6	14	1070.7	2	
20	5310	1	98.4	11	1759.3	1	1
	5310	2	58.6	16	1666.7	2	
	5310	3	87.3	6	1903.2	1	
	5310	4	82.9	15	1729.9	3	
	5310	5	55.5	13	1647.2	1	
	5310	6	98.8	13	1093.7	3	
	5310	7	83.4	11	1319.3	3	
	5310	8	56.6	9	1815.9	2	
	5310	9	51.4	14	1145.0	1	
	5310	10	99.0	9	1866.3	3	
21	5325.5	1	57.0	7	1657.8	2	1
	5322.5	2	76.7	16	1780.7	1	
	5325.5	3	82.6	7	1521.5	1	
	5320.5	4	88.0	19	1262.2	2	
	5325.5	5	53.5	7	1779.6	3	
	5326.5	6	89.8	6	1003.4	3	
	5323.5	7	76.5	12	1073.3	3	
	5325.5	8	77.8	7	1072.9	3	
	5320.5	9	54.7	20	1465.2	3	
	5324.5	10	84.5	9	1106.0	1	
	5320.5	11	94.7	20	1008.6	2	
	5321.5	12	93.3	18	1919.1	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5324.5	1	57.8	9	1628.1	2	1
	5321.5	2	90.9	17	1662.0	2	
	5325.5	3	61.8	8	1488.8	1	
	5320.5	4	85.7	19	1533.2	3	
	5321.5	5	99.0	17	1199.1	2	
	5324.5	6	59.6	10	1791.2	3	
	5326.5	7	58.8	5	1611.8	3	
	5322.5	8	68.2	16	1361.5	2	
	5323.5	9	77.9	13	1383.8	2	
23	5326.5	1	75.0	6	1467.1	2	0
	5321.5	2	75.8	18	1808.5	1	
	5324.5	3	93.2	9	1084.0	3	
	5324.5	4	89.2	9	1179.7	3	
	5325.5	5	84.0	8	1891.0	2	
	5324.5	6	77.1	9	1166.6	2	
	5325.5	7	88.6	8	1926.3	1	
	5324.5	8	74.0	9	1292.0	3	
	5325.5	9	79.7	7	1236.1	2	
	5321.5	10	54.3	18	1790.8	3	
	5324.5	11	93.1	11	1986.3	2	
	5322.5	12	83.9	15	1901.0	2	
	5322.5	13	62.3	14	1122.2	3	
	5326.5	14	80.3	6	1977.9	3	
	5325.5	15	50.2	7	1924.2	3	
24	5326.5	1	90.4	6	1983.9	2	1
	5324.5	2	51.3	10	1411.9	2	
	5326.5	3	79.8	6	1484.0	2	
	5321.5	4	66.3	18	1164.8	3	
	5324.5	5	70.3	10	1498.7	1	
	5320.5	6	73.8	20	1777.2	3	
	5324.5	7	92.9	10	1670.3	2	
	5323.5	8	78.5	12	1553.1	1	
	5321.5	9	70.7	18	1724.7	1	
	5325.5	10	86.9	8	1020.7	1	
	5320.5	11	69.3	19	1752.4	3	
	5325.5	12	70.2	7	1536.8	1	
	5320.5	13	50.3	19	1259.4	3	
	5320.5	14	92.2	20	1959.2	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5325.5	1	54.8	8	1562.2	1	1
	5323.5	2	61.8	13	1033.4	2	
	5326.5	3	54.4	5	1379.5	2	
	5325.5	4	60.4	7	1110.5	3	
	5324.5	5	80.8	9	1803.8	2	
	5321.5	6	96.1	18	1607.5	3	
	5322.5	7	66.6	16	1427.0	1	
	5326.5	8	60.3	6	1563.7	1	
	5325.5	9	85.1	8	1636.3	3	
	5321.5	10	95.3	17	1462.9	3	
	5320.5	11	81.7	19	1007.3	2	
	5325.5	12	56.9	8	1549.7	1	
	5323.5	13	96.8	13	1634.7	2	
	5322.5	14	88.8	14	1535.4	2	
	5321.5	15	54.3	18	1074.3	3	
	5322.5	16	59.0	16	1476.2	3	
	5321.5	17	76.7	18	1401.7	3	
	5320.5	18	69.4	19	1892.4	2	
26	5324.5	1	62.6	11	1146.3	2	1
	5324.5	2	56.9	9	1335.7	1	
	5320.5	3	81.1	20	1095.6	2	
	5323.5	4	93.4	13	1858.1	2	
	5320.5	5	52.4	20	1363.8	3	
	5324.5	6	57.3	10	1174.6	1	
	5324.5	7	98.3	10	1644.7	3	
	5321.5	8	66.4	18	1654.2	1	
	5325.5	9	94.7	7	1815.8	2	
	5320.5	10	64.4	19	1450.2	3	
	5324.5	11	76.1	11	1387.7	2	
	5321.5	12	61.4	17	1617.1	2	
	5326.5	13	53.1	5	1024.9	1	
	5325.5	14	80.9	7	1926.5	3	
	5323.5	15	59.2	12	1259.8	1	
	5320.5	16	86.5	19	1122.2	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5324.5	1	62.6	9	1013.8	2	0
	5323.5	2	77.6	12	1482.8	2	
	5323.5	3	71.1	13	1158.9	1	
	5324.5	4	87.4	9	1424.0	3	
	5326.5	5	91.5	6	1194.9	1	
	5322.5	6	57.0	16	1856.7	3	
	5322.5	7	53.2	16	1186.8	2	
	5325.5	8	61.0	7	1879.1	3	
	5326.5	9	84.2	6	1199.8	1	
	5323.5	10	73.3	13	1505.5	3	
	5321.5	11	69.7	17	1811.1	2	
	5324.5	12	85.1	9	1452.5	3	
	5324.5	13	91.4	9	1487.7	1	
	5326.5	14	53.9	6	1116.2	1	
	5322.5	15	79.1	15	1631.4	1	
	5326.5	16	95.3	6	1205.8	1	
	5321.5	17	75.7	18	1035.9	2	
	5323.5	18	54.6	13	1755.0	2	
	5326.5	19	64.2	6	1622.2	2	
	5322.5	20	58.6	16	1754.4	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5324.5	1	86.5	9	1490.0	2	1
	5323.5	2	54.4	13	1798.1	3	
	5323.5	3	83.8	13	1836.0	1	
	5325.5	4	73.0	8	1551.4	1	
	5325.5	5	88.9	7	1507.9	2	
	5322.5	6	63.5	14	1186.6	3	
	5324.5	7	55.9	9	1283.9	1	
	5322.5	8	64.4	15	1395.1	3	
	5323.5	9	98.6	12	1864.0	1	
	5322.5	10	99.9	16	1172.5	1	
	5326.5	11	98.6	6	1330.1	2	
	5321.5	12	62.7	17	1269.2	3	
	5322.5	13	73.6	14	1054.6	3	
	5323.5	14	55.6	12	1796.0	2	
	5324.5	15	80.8	10	1716.4	3	
	5326.5	16	61.2	5	1239.6	2	
	5321.5	17	65.3	17	1767.9	1	
	5322.5	18	84.0	16	1660.0	3	
	5321.5	19	71.7	18	1127.9	3	
	5322.5	20	79.3	15	1658.7	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5321.5	1	94.9	18	1256.5	3	1
	5322.5	2	52.6	16	1682.4	1	
	5325.5	3	86.9	7	1643.4	1	
	5326.5	4	67.2	6	1128.9	2	
	5322.5	5	58.3	16	1310.2	2	
	5324.5	6	51.3	9	1266.0	1	
	5325.5	7	79.5	8	1021.2	1	
	5321.5	8	81.6	18	1603.2	2	
	5326.5	9	60.1	5	1146.6	2	
	5322.5	10	98.9	14	1743.0	1	
	5326.5	11	95.6	6	1622.0	3	
	5324.5	12	52.9	9	1231.6	2	
	5323.5	13	98.1	12	1956.9	1	
	5322.5	14	89.1	16	1480.0	1	
	5323.5	15	79.0	13	1432.7	1	
	5321.5	16	52.2	17	1738.7	3	
	5325.5	17	52.3	8	1417.0	3	
30	5321.5	1	87.8	18	1787.2	3	1
	5323.5	2	82.7	13	1005.4	2	
	5322.5	3	95.7	14	1462.4	1	
	5321.5	4	59.1	17	1255.9	1	
	5325.5	5	99.6	7	1634.6	3	
	5323.5	6	73.5	12	1878.9	2	
	5325.5	7	58.2	7	1721.7	2	
	5322.5	8	89.3	15	1032.2	3	
	5323.5	9	65.5	13	1545.6	1	
	5322.5	10	99.3	14	1003.4	3	
	5323.5	11	84.0	13	1094.7	2	
	5323.5	12	84.0	12	1140.3	3	
	5320.5	13	76.1	19	1052.6	3	
	5320.5	14	97.6	19	1699.7	3	
Detection Percentage (%)							86.67

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	5310	1	333	9	0.333	300
2	5310	1	333	9	0.333	300
3	5310	1	333	9	0.333	300
4	5310	1	333	9	0.333	300
5	5310	1	333	9	0.333	300
6	5310	1	333	9	0.333	300
7	5310	1	333	9	0.333	300
8	5310	1	333	9	0.333	300
9	5310	1	333	9	0.333	300
10	5310	1	333	9	0.333	300
11	5310	1	333	9	0.333	300
12	5310	1	333	9	0.333	300
13	5310	1	333	9	0.333	300
14	5310	1	333	9	0.333	300
15	5310	1	333	9	0.333	300
16	5310	1	333	9	0.333	300
17	5310	1	333	9	0.333	300
18	5310	1	333	9	0.333	300
19	5310	1	333	9	0.333	300
20	5310	1	333	9	0.333	300
21	5310	1	333	9	0.333	300
22	5310	1	333	9	0.333	300
23	5310	1	333	9	0.333	300
24	5310	1	333	9	0.333	300
25	5310	1	333	9	0.333	300
26	5310	1	333	9	0.333	300
27	5310	1	333	9	0.333	300
28	5310	1	333	9	0.333	300
29	5310	1	333	9	0.333	300
30	5310	1	333	9	0.333	300
Detection Percentage (%)						100.00

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1	598	89	1672	1
2	5290	1	918	58	1089	1
3	5290	1	538	99	1859	0
4	5290	1	878	61	1139	1
5	5290	1	758	70	1319	1
6	5290	1	3066	18	326	1
7	5290	1	538	99	1859	1
8	5290	1	518	102	1931	1
9	5290	1	738	72	1355	1
10	5290	1	858	62	1166	1
11	5290	1	878	61	1139	1
12	5290	1	878	61	1139	1
13	5290	1	3066	18	326	1
14	5290	1	598	89	1672	1
15	5290	1	658	81	1520	1
16	5290	1	1077	50	929	1
17	5290	1	936	57	1068	1
18	5290	1	1286	42	778	1
19	5290	1	2113	25	473	1
20	5290	1	1803	30	555	1
21	5290	1	521	102	1919	1
22	5290	1	2044	26	489	1
23	5290	1	1886	28	530	1
24	5290	1	2112	25	473	1
25	5290	1	2363	23	423	1
26	5290	1	2519	21	397	1
27	5290	1	1142	47	876	1
28	5290	1	1656	32	604	1
29	5290	1	1055	51	948	1
30	5290	1	2503	22	400	1
Detection Percentage (%)						96.67

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1.20	225.00	25	4444	1
2	5290	4.80	201.30	29	4968	1
3	5290	1.50	210.10	27	4760	1
4	5290	4.50	154.40	26	6477	1
5	5290	4.80	171.90	28	5817	1
6	5290	2.40	168.80	29	5924	1
7	5290	4.10	176.00	27	5682	1
8	5290	1.20	210.10	23	4760	1
9	5290	1.30	211.40	29	4730	1
10	5290	3.30	225.90	27	4427	1
11	5290	3.30	196.20	23	5097	1
12	5290	2.60	177.40	29	5637	1
13	5290	3.90	211.10	24	4737	1
14	5290	4.70	154.30	29	6481	1
15	5290	2.90	177.30	29	5640	1
16	5290	3.20	158.50	28	6309	1
17	5290	1.70	159.10	25	6285	1
18	5290	3.60	182.10	23	5491	1
19	5290	2.10	220.60	23	4533	1
20	5290	2.60	224.10	25	4462	0
21	5290	3.30	189.90	23	5266	1
22	5290	4.30	166.10	24	6020	1
23	5290	1.30	150.40	23	6649	1
24	5290	1.30	180.60	28	5537	1
25	5290	1.30	192.40	26	5198	1
26	5290	1.60	190.80	29	5241	1
27	5290	3.10	213.30	28	4688	1
28	5290	3.80	195.80	23	5107	1
29	5290	3.70	180.90	23	5528	1
30	5290	2.90	169.10	26	5914	1
Detection Percentage (%)						96.67

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	7.90	209.80	16	4766.44	1
2	5290	7.10	309.50	18	3231.02	1
3	5290	8.30	475.90	18	2101.28	1
4	5290	9.10	303.60	16	3293.81	1
5	5290	8.80	362.80	18	2756.34	1
6	5290	7.00	372.30	18	2686.01	1
7	5290	6.50	228.90	17	4368.72	1
8	5290	6.00	463.40	16	2157.96	0
9	5290	9.40	324.30	17	3083.56	1
10	5290	8.30	232.90	16	4293.69	1
11	5290	8.40	206.70	18	4837.93	1
12	5290	9.00	434.50	18	2301.50	1
13	5290	6.60	221.90	16	4506.53	1
14	5290	9.90	294.90	17	3390.98	1
15	5290	8.30	247.60	17	4038.77	1
16	5290	7.20	381.00	17	2624.67	1
17	5290	6.20	393.00	16	2544.53	1
18	5290	7.30	297.60	16	3360.22	1
19	5290	9.70	467.40	18	2139.50	1
20	5290	8.10	302.20	17	3309.07	1
21	5290	9.60	276.00	17	3623.19	1
22	5290	7.70	325.00	18	3076.92	1
23	5290	7.00	330.80	17	3022.97	1
24	5290	9.20	254.20	17	3933.91	1
25	5290	6.80	497.10	18	2011.67	1
26	5290	9.00	449.40	17	2225.19	1
27	5290	7.00	205.50	17	4866.18	1
28	5290	6.50	392.60	16	2547.12	1
29	5290	6.30	263.50	17	3795.07	1
30	5290	8.60	465.20	16	2149.61	0
Detection Percentage (%)						93.33

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	19.30	426.70	16	2344	1
2	5290	15.80	478.60	14	2089	0
3	5290	16.30	317.60	14	3149	1
4	5290	19.60	455.00	15	2198	1
5	5290	13.10	215.80	14	4634	1
6	5290	12.90	341.00	13	2933	1
7	5290	13.90	218.10	12	4585	1
8	5290	12.40	454.90	12	2198	1
9	5290	14.00	336.70	15	2970	1
10	5290	17.90	469.80	14	2129	1
11	5290	11.90	485.50	14	2060	1
12	5290	16.70	423.60	12	2361	1
13	5290	16.00	469.40	14	2130	1
14	5290	17.00	304.20	13	3287	1
15	5290	11.10	461.60	12	2166	1
16	5290	14.60	490.00	16	2041	1
17	5290	14.90	234.80	12	4259	1
18	5290	15.80	422.10	15	2369	1
19	5290	16.40	407.90	14	2452	1
20	5290	12.30	315.30	16	3172	1
21	5290	17.70	423.50	14	2361	1
22	5290	12.20	261.70	12	3821	1
23	5290	19.00	449.90	14	2223	1
24	5290	17.80	270.90	16	3691	1
25	5290	19.30	266.10	15	3758	1
26	5290	18.40	397.80	16	2514	1
27	5290	15.30	307.70	15	3250	0
28	5290	12.00	251.20	14	3981	1
29	5290	14.10	248.40	14	4026	1
30	5290	14.20	384.80	15	2599	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5258	1	94.9	14	1318.7	1	1
	5257	2	82.1	12	1458.5	2	
	5257	3	95.4	12	1008.1	3	
	5260	4	51.7	20	1771.5	1	
	5256	5	62.1	9	1502.5	3	
	5258	6	84.6	14	1792.1	3	
	5258	7	64.9	15	1236.6	1	
	5256	8	94.0	11	1692.8	1	
	5260	9	76.2	19	1264.6	2	
	5255	10	78.4	8	1709.6	3	
	5259	11	94.2	17	1137.1	1	
2	5258	1	72.4	15	1499.6	1	1
	5260	2	95.7	20	1196.9	2	
	5255	3	53.6	8	1408.9	2	
	5257	4	73.3	12	1552.0	3	
	5256	5	59.8	11	1028.2	1	
	5255	6	91.9	8	1633.1	1	
	5258	7	51.6	15	1770.4	1	
	5254	8	73.4	6	1675.3	2	
	5258	9	60.5	16	1170.2	2	
	5259	10	72.5	18	1495.6	3	
	5259	11	99.2	17	1387.6	2	
	5258	12	71.3	16	1429.0	2	
3	5257	1	82.0	13	1240.2	2	0
	5255	2	65.9	7	1682.8	3	
	5256	3	92.7	11	1127.2	3	
	5257	4	90.2	12	1165.6	1	
	5255	5	87.6	7	1486.8	2	
	5256	6	61.6	9	1127.9	1	
	5260	7	97.0	19	1991.5	1	
	5257	8	70.2	12	1857.9	1	
	5258	9	90.0	16	1548.2	1	
	5255	10	58.5	7	1965.1	2	
	5260	11	52.8	20	1426.6	2	
	5257	12	98.1	13	1445.6	1	
	5258	13	76.9	14	1841.1	3	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5255	1	86.6	8	1818.2	2	1
	5259	2	92.9	17	1308.2	1	
	5254	3	84.3	6	1280.5	2	
	5257	4	65.9	12	1453.0	1	
	5256	5	91.5	10	1051.7	3	
	5258	6	53.8	14	1107.2	3	
	5254	7	51.6	6	1750.0	3	
	5258	8	83.0	14	1120.7	1	
	5256	9	52.4	9	1842.9	2	
5	5260	1	99.9	20	1647.5	3	1
	5260	2	78.9	19	1263.8	1	
	5260	3	71.2	20	1644.1	2	
	5258	4	90.7	15	1890.8	2	
	5255	5	96.5	7	1218.6	1	
	5259	6	95.3	17	1692.3	1	
	5257	7	98.5	13	1528.8	1	
	5259	8	51.4	17	1895.8	1	
	5258	9	67.3	14	1097.2	2	
	5258	10	56.9	15	1218.0	3	
	5259	11	67.5	18	1515.6	1	
	5254	12	98.5	6	1939.5	2	
	5254	13	71.2	6	1054.4	3	
	5255	14	57.8	8	1699.6	2	
	5257	15	62.4	12	1369.8	3	
6	5256	1	98.3	10	1119.1	1	1
	5259	2	83.7	17	1112.9	3	
	5258	3	94.7	14	1928.4	1	
	5259	4	59.9	18	1993.0	1	
	5258	5	55.0	14	1908.4	1	
	5258	6	65.3	14	1521.8	2	
	5258	7	72.0	16	1367.6	2	
	5259	8	97.0	17	1239.9	2	
	5258	9	96.0	14	1516.1	3	
	5254	10	92.8	6	1707.5	3	
	5258	11	95.3	16	1179.3	3	
	5254	12	92.3	6	1230.9	2	
	5260	13	51.4	20	1744.4	2	
	5260	14	53.6	20	1624.3	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5259	1	98.1	18	1696.1	3	1
	5256	2	52.6	11	1667.1	2	
	5260	3	75.7	19	1017.6	3	
	5257	4	61.6	13	1748.7	1	
	5256	5	51.2	9	1571.8	2	
	5259	6	57.9	18	1332.3	2	
	5254	7	71.4	6	1290.7	1	
	5260	8	57.6	19	1520.0	2	
	5258	9	63.0	15	1286.0	1	
	5255	10	61.2	8	1781.2	1	
	5258	11	59.5	15	1295.3	3	
	5254	12	92.0	6	1769.1	3	
	5254	13	71.3	6	1891.8	3	
	5257	14	59.6	13	1799.6	2	
	5255	15	73.6	8	1427.5	3	
	5257	16	56.0	13	1451.2	2	
	5259	17	53.0	17	1335.5	3	
8	5256	1	55.7	10	1626.1	1	1
	5258	2	97.0	16	1009.4	3	
	5259	3	57.3	18	1639.5	1	
	5255	4	56.0	8	1801.7	2	
	5258	5	78.6	14	1287.8	3	
	5255	6	71.4	7	1471.5	3	
	5255	7	73.9	7	1011.2	2	
	5256	8	67.6	10	1635.1	3	
	5255	9	71.4	8	1775.0	3	
	5258	10	88.4	15	1722.2	2	
	5260	11	65.4	20	1740.6	3	
	5257	12	99.8	13	1604.7	1	
	5259	13	78.6	17	1434.1	2	
	5257	14	86.8	13	1084.1	3	
	5260	15	91.1	19	1834.6	2	
	5258	16	80.9	16	1930.6	2	
	5255	17	78.7	8	1779.7	3	
	5260	18	59.1	20	1873.9	3	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5257	1	78.8	13	1556.6	1	1
	5258	2	99.5	14	1229.5	1	
	5255	3	57.5	7	1461.5	1	
	5255	4	99.9	7	1787.5	2	
	5256	5	76.1	9	1347.6	3	
	5258	6	99.5	16	1434.1	2	
	5259	7	77.9	17	1933.6	3	
	5254	8	82.7	5	1076.6	1	
	5259	9	68.7	17	1406.1	3	
	5255	10	88.2	7	1513.2	3	
	5259	11	53.7	18	1270.9	1	
	5258	12	90.1	15	1501.0	3	
	5257	13	74.2	13	1363.6	3	
	5260	14	92.9	19	1376.4	3	
	5256	15	66.7	11	1169.2	3	
	5259	16	86.3	17	1659.7	3	
	5258	17	80.8	16	1290.1	3	
	5258	18	50.6	14	1978.7	2	
	5259	19	56.7	17	1815.1	2	
10	5254	1	73.4	5	1130.4	2	1
	5255	2	68.1	8	1879.0	2	
	5257	3	64.2	12	1216.0	2	
	5255	4	73.5	7	1776.9	3	
	5257	5	97.1	12	1644.7	3	
	5256	6	66.4	10	1995.1	3	
	5258	7	77.9	15	1457.8	2	
	5256	8	91.2	10	1846.2	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5290	1	90.6	14	1210.7	3	0
	5290	2	88.5	18	1906.1	2	
	5290	3	82.1	14	1987.4	1	
	5290	4	99.4	11	1318.1	1	
	5290	5	96.1	14	1326.7	1	
	5290	6	62.6	15	1112.8	3	
	5290	7	85.3	7	1750.9	1	
	5290	8	80.4	18	1101.7	1	
	5290	9	86.0	15	1205.5	1	
	5290	10	98.0	7	1911.3	2	
	5290	11	50.8	12	1709.7	1	
	5290	12	88.6	9	1459.0	1	
	5290	13	53.9	14	1874.7	1	
	5290	14	50.3	20	1794.3	2	
	5290	15	83.7	11	1978.1	2	
	5290	16	83.3	19	1984.6	3	
12	5290	1	89.5	12	1788.9	3	1
	5290	2	77.6	6	1790.1	3	
	5290	3	68.5	19	1720.2	2	
	5290	4	82.4	19	1244.7	1	
	5290	5	54.1	17	1817.0	2	
	5290	6	69.0	17	1289.2	1	
	5290	7	99.8	20	1165.0	2	
	5290	8	78.9	8	1720.6	3	
	5290	9	89.5	10	1640.5	1	
	5290	10	96.9	10	1865.9	3	
	5290	11	88.8	10	1456.2	1	
	5290	12	73.0	18	1251.7	1	
	5290	13	76.8	18	1892.1	1	
	5290	14	98.7	5	1789.7	1	
	5290	15	81.9	12	1234.0	1	
	5290	16	59.6	15	1164.5	1	
	5290	17	71.6	16	1266.3	2	
	5290	18	79.5	15	1273.1	3	
	5290	19	77.7	15	1915.2	1	
	5290	20	71.1	14	1698.2	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5290	1	74.9	13	1611.2	1	1
	5290	2	92.6	17	1766.1	2	
	5290	3	74.3	14	1863.6	2	
	5290	4	60.0	6	1861.2	3	
	5290	5	52.6	9	1990.4	2	
	5290	6	74.4	5	1493.3	2	
	5290	7	87.7	10	1293.7	3	
	5290	8	71.3	19	1963.2	3	
	5290	9	96.3	7	1030.9	1	
	5290	10	85.4	6	1150.9	2	
14	5290	1	69.0	13	1422.7	2	1
	5290	2	91.3	17	1775.9	3	
	5290	3	84.0	8	1030.9	1	
	5290	4	74.8	8	1683.3	3	
	5290	5	84.9	16	1007.1	1	
	5290	6	52.9	8	1345.3	2	
	5290	7	74.5	18	1284.4	2	
	5290	8	60.0	19	1663.6	1	
	5290	9	92.3	15	1193.4	1	
	5290	10	86.9	12	1977.8	3	
	5290	11	92.8	18	1116.6	3	
	5290	12	86.0	15	1684.2	2	
	5290	13	50.4	13	1996.7	1	
	5290	14	94.2	10	1661.6	1	
	5290	15	88.2	9	1591.9	1	
	5290	16	94.3	10	1916.9	3	
	5290	17	97.6	13	1144.6	2	
	5290	18	95.1	8	1947.9	3	
	5290	19	67.8	10	1169.4	2	
	5290	20	87.6	5	1828.4	3	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5290	1	58.5	14	1367.2	2	1
	5290	2	96.5	10	1297.9	2	
	5290	3	57.9	6	1801.2	2	
	5290	4	87.4	8	1983.0	2	
	5290	5	64.8	15	1312.5	1	
	5290	6	53.2	8	1059.4	1	
	5290	7	97.9	9	1377.6	1	
	5290	8	56.8	6	1707.8	2	
	5290	9	73.5	19	1518.2	3	
	5290	10	52.6	10	1087.8	1	
	5290	11	74.2	16	1198.4	1	
	5290	12	68.8	10	1592.7	2	
	5290	13	79.0	18	1198.8	3	
	5290	14	89.2	18	1465.8	1	
	5290	15	55.5	16	1290.9	3	
	5290	16	78.1	16	1546.0	3	
	5290	17	62.6	8	1537.4	2	
	5290	18	99.6	14	1576.3	3	
	5290	19	96.1	15	1187.2	2	
16	5290	1	67.7	14	1699.7	3	1
	5290	2	84.2	13	1794.2	2	
	5290	3	63.2	13	1590.3	2	
	5290	4	52.9	11	1621.2	3	
	5290	5	50.3	20	1698.0	1	
	5290	6	95.2	20	1493.6	3	
	5290	7	60.2	19	1974.9	3	
	5290	8	69.2	6	1365.4	1	
	5290	9	53.5	10	1461.4	1	
	5290	10	64.5	19	1730.6	3	
	5290	11	85.1	17	1861.6	3	
	5290	12	64.3	9	1834.8	1	
	5290	13	54.3	20	1062.6	1	
	5290	14	56.1	13	1664.6	1	
	5290	15	90.4	6	1927.0	2	
	5290	16	50.3	13	1145.7	1	
	5290	17	70.0	14	1500.8	1	
	5290	18	77.3	11	1136.2	3	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5290	1	95.8	9	1623.5	1	1
	5290	2	50.7	11	1680.6	3	
	5290	3	51.4	15	1189.1	2	
	5290	4	92.8	13	1879.1	2	
	5290	5	62.5	8	1774.2	1	
	5290	6	51.4	18	1890.7	2	
	5290	7	84.6	8	1490.3	1	
	5290	8	71.1	7	1478.3	1	
	5290	9	56.7	8	1097.2	1	
	5290	10	54.6	13	1331.4	1	
	5290	11	65.3	7	1269.7	2	
	5290	12	69.7	19	1932.9	3	
	5290	13	72.5	16	1338.9	3	
	5290	14	58.5	7	1139.6	1	
	5290	15	89.5	12	1712.2	1	
	5290	16	81.0	6	1446.7	2	
	5290	17	61.2	20	1586.0	2	
18	5290	1	50.7	16	1107.1	3	1
	5290	2	76.6	10	1053.6	2	
	5290	3	76.3	18	1312.9	3	
	5290	4	93.7	7	1743.2	2	
	5290	5	50.4	12	1425.0	1	
	5290	6	83.7	11	1881.6	3	
	5290	7	69.5	18	1539.9	3	
	5290	8	53.6	18	1117.0	1	
	5290	9	53.5	14	1455.7	3	
	5290	10	55.2	9	1677.6	1	
	5290	11	93.7	17	1636.8	2	
	5290	12	75.7	15	1078.0	3	
	5290	13	99.4	9	1931.5	2	
	5290	14	76.5	12	1977.3	2	
	5290	15	55.0	7	1658.9	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5290	1	52.0	7	1863.9	2	1
	5290	2	58.6	14	1906.2	1	
	5290	3	51.5	17	1748.5	3	
	5290	4	82.2	7	1188.5	3	
	5290	5	94.3	10	1742.7	2	
	5290	6	98.1	17	1015.0	1	
	5290	7	57.7	7	1569.2	2	
	5290	8	72.9	10	1645.7	1	
	5290	9	79.4	12	1327.1	3	
	5290	10	51.1	17	1283.6	1	
	5290	11	99.8	10	1597.4	2	
	5290	12	88.2	9	1271.2	3	
	5290	13	90.4	17	1491.7	1	
	5290	14	72.6	7	1938.0	2	
20	5290	1	54.2	13	1435.3	2	1
	5290	2	86.0	6	1776.1	1	
	5290	3	75.6	12	1146.0	1	
	5290	4	52.6	13	1852.3	2	
	5290	5	95.0	11	1023.8	2	
	5290	6	99.6	8	1154.0	1	
	5290	7	69.6	8	1148.5	1	
	5290	8	50.2	16	1295.3	2	
	5290	9	89.6	6	1547.0	1	
	5290	10	76.2	10	1449.0	2	
21	5322	1	62.6	15	1053.1	3	1
	5324	2	57.3	10	1039.1	3	
	5321	3	91.1	17	1114.0	3	
	5320	4	62.6	20	1339.7	3	
	5324	5	74.5	9	1535.2	2	
	5325	6	99.6	7	1617.9	1	
	5321	7	76.5	18	1041.7	3	
	5320	8	70.8	19	1274.6	2	
	5324	9	66.1	11	1853.8	3	
	5321	10	82.5	17	1630.5	1	
	5324	11	66.2	9	1234.9	1	
	5322	12	84.0	16	1063.6	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5321	1	55.4	18	1433.8	3	1
	5320	2	67.4	19	1486.9	1	
	5322	3	78.0	15	1913.4	1	
	5321	4	64.9	17	1766.6	3	
	5324	5	71.6	11	1460.7	3	
	5326	6	89.3	5	1985.6	2	
	5321	7	68.3	18	1789.7	1	
	5325	8	58.5	7	1432.2	1	
	5320	9	58.4	19	1218.3	2	
23	5326	1	54.0	6	1640.0	1	1
	5321	2	60.0	18	1884.5	2	
	5321	3	59.9	17	1594.2	1	
	5322	4	54.3	15	1566.4	3	
	5324	5	65.3	9	1310.3	3	
	5322	6	56.4	14	1600.7	2	
	5320	7	67.7	19	1685.3	2	
	5324	8	85.2	10	1871.7	3	
	5320	9	51.1	19	1365.2	1	
	5326	10	87.0	6	1995.3	2	
	5325	11	67.9	8	1140.6	3	
	5325	12	87.8	7	1549.9	2	
	5321	13	88.5	17	1776.3	1	
	5324	14	92.2	9	1290.8	3	
	5321	15	57.7	17	1659.6	1	
24	5326	1	80.3	6	1005.7	2	1
	5320	2	88.4	20	1184.6	2	
	5326	3	62.9	6	1442.8	3	
	5324	4	91.7	9	1433.8	1	
	5326	5	95.1	5	1470.9	2	
	5322	6	66.4	15	1531.0	3	
	5322	7	98.9	15	1075.2	2	
	5325	8	69.3	7	1588.5	1	
	5322	9	64.6	16	1977.5	3	
	5324	10	86.2	10	1740.9	3	
	5320	11	71.4	20	1553.1	3	
	5326	12	91.2	6	1519.6	2	
	5322	13	73.7	16	1424.4	3	
	5323	14	87.7	13	1698.7	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5321	1	88.6	17	1389.0	2	1
	5326	2	57.9	5	1127.0	3	
	5321	3	69.2	18	1320.1	2	
	5325	4	94.7	7	1192.3	1	
	5326	5	74.9	5	1227.9	3	
	5326	6	95.7	6	1660.2	1	
	5324	7	98.3	11	1849.4	2	
	5320	8	73.7	19	1085.0	3	
	5324	9	90.5	10	1901.6	3	
	5321	10	68.8	17	1973.4	3	
	5320	11	81.9	20	1639.3	3	
	5326	12	54.3	5	1420.7	1	
	5323	13	58.6	12	1610.4	1	
	5321	14	87.0	18	1049.1	1	
	5326	15	72.7	6	1594.0	3	
	5322	16	59.0	14	1961.9	3	
	5324	17	86.1	10	1434.2	2	
	5325	18	90.1	8	1535.5	3	
26	5323	1	70.3	13	1272.2	1	1
	5326	2	98.9	6	1287.9	3	
	5326	3	55.1	6	1075.5	3	
	5325	4	76.8	7	1756.2	1	
	5323	5	73.6	12	1914.7	1	
	5326	6	83.8	6	1961.7	1	
	5320	7	77.6	19	1355.2	1	
	5323	8	68.5	12	1155.3	2	
	5324	9	83.5	9	1179.6	1	
	5320	10	80.4	20	1243.0	3	
	5322	11	68.7	15	1071.0	1	
	5325	12	82.7	8	1429.6	2	
	5324	13	76.4	11	1377.8	3	
	5324	14	81.6	11	1821.5	2	
	5325	15	54.3	8	1230.0	1	
	5324	16	81.7	10	1567.7	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5324	1	52.1	10	1114.7	3	1
	5322	2	60.3	15	1377.6	2	
	5321	3	69.7	18	1354.5	2	
	5320	4	85.0	19	1353.2	1	
	5320	5	93.4	19	1725.6	1	
	5325	6	62.2	7	1590.6	2	
	5325	7	78.9	8	1901.6	3	
	5323	8	91.3	12	1780.9	2	
	5326	9	98.0	6	1532.2	1	
	5321	10	72.0	17	1923.1	2	
	5320	11	87.3	19	1969.2	3	
	5324	12	53.4	11	1197.0	3	
	5320	13	72.1	20	1963.2	2	
	5322	14	90.8	15	1640.7	3	
	5323	15	91.6	12	1220.3	2	
	5324	16	75.7	9	1404.0	2	
	5324	17	99.0	9	1942.3	1	
	5322	18	51.0	14	1144.3	2	
	5325	19	92.9	7	1782.1	1	
	5326	20	52.8	5	1838.3	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5322	1	62.6	15	1886.0	1	1
	5326	2	65.2	6	1905.1	1	
	5324	3	65.4	9	1897.8	3	
	5325	4	94.5	8	1653.9	2	
	5325	5	87.1	8	1694.2	3	
	5322	6	63.6	16	1554.6	2	
	5326	7	78.4	6	1669.0	3	
	5320	8	85.3	20	1313.2	3	
	5324	9	50.5	11	1531.7	3	
	5324	10	73.5	9	1732.8	1	
	5324	11	94.5	11	1944.8	2	
	5325	12	77.1	7	1592.0	2	
	5322	13	90.9	16	1846.6	2	
	5321	14	69.1	18	1129.1	3	
	5322	15	71.4	15	1812.8	2	
	5325	16	60.1	7	1389.9	1	
	5324	17	57.3	10	1954.6	2	
	5322	18	97.5	16	1030.8	3	
	5322	19	64.2	16	1790.5	2	
	5321	20	64.0	17	1120.7	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5324	1	84.6	10	1910.5	3	0
	5323	2	70.4	13	1960.5	2	
	5325	3	84.1	8	1690.1	3	
	5324	4	72.4	10	1360.4	1	
	5324	5	85.0	9	1899.0	1	
	5324	6	56.5	11	1122.3	2	
	5325	7	98.8	7	1075.1	3	
	5322	8	83.8	15	1804.4	1	
	5325	9	78.2	7	1485.4	1	
	5325	10	56.5	8	1437.8	3	
	5324	11	88.6	9	1400.8	3	
	5320	12	80.4	20	1986.3	1	
	5325	13	79.4	8	1319.0	2	
	5322	14	50.1	14	1421.3	3	
	5322	15	90.4	15	1408.8	3	
	5323	16	87.0	12	1693.0	3	
	5322	17	87.8	15	1002.7	1	
30	5325	1	83.8	7	1338.4	1	1
	5323	2	74.9	13	1302.7	3	
	5321	3	77.7	17	1636.8	1	
	5326	4	51.8	5	1651.7	2	
	5326	5	86.9	6	1700.2	2	
	5322	6	52.0	15	1317.5	1	
	5324	7	52.6	9	1360.6	2	
	5323	8	72.0	12	1114.0	1	
	5324	9	65.7	9	1826.0	3	
	5324	10	90.5	9	1395.1	2	
	5324	11	64.6	11	1722.6	1	
	5326	12	77.3	5	1178.1	1	
	5324	13	75.5	9	1559.5	1	
	5323	14	88.4	13	1540.9	3	
Detection Percentage (%)							90.00

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	1	878	61	1139	1
2	5250	1	758	70	1319	1
3	5250	1	858	62	1166	1
4	5250	1	938	57	1066	1
5	5250	1	598	89	1672	1
6	5250	1	938	57	1066	1
7	5250	1	598	89	1672	1
8	5250	1	3066	18	326	1
9	5250	1	818	65	1222	1
10	5250	1	518	102	1931	1
11	5250	1	698	76	1433	1
12	5250	1	3066	18	326	1
13	5250	1	938	57	1066	1
14	5250	1	538	99	1859	1
15	5250	1	638	83	1567	1
16	5250	1	669	79	1495	0
17	5250	1	658	81	1520	1
18	5250	1	1736	31	576	1
19	5250	1	2194	25	456	1
20	5250	1	1807	30	553	1
21	5250	1	942	57	1062	1
22	5250	1	1992	27	502	0
23	5250	1	2108	26	474	1
24	5250	1	2694	20	371	1
25	5250	1	2484	22	403	1
26	5250	1	1870	29	535	1
27	5250	1	895	59	1117	1
28	5250	1	804	66	1244	1
29	5250	1	2920	19	342	1
30	5250	1	536	99	1866	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	3.00	189.20	25	5285	1
2	5250	2.80	183.30	29	5456	1
3	5250	3.00	196.20	24	5097	1
4	5250	3.30	192.20	25	5203	1
5	5250	1.10	216.20	27	4625	1
6	5250	1.30	213.70	24	4679	1
7	5250	4.10	206.50	28	4843	1
8	5250	2.70	191.80	28	5214	1
9	5250	4.80	224.40	28	4456	0
10	5250	3.80	226.80	26	4409	1
11	5250	3.70	183.50	28	5450	1
12	5250	3.10	219.50	29	4556	1
13	5250	4.80	228.20	24	4382	1
14	5250	3.00	190.80	23	5241	1
15	5250	3.80	171.90	23	5817	1
16	5250	3.50	211.60	25	4726	1
17	5250	4.60	152.80	28	6545	1
18	5250	1.50	173.00	23	5780	1
19	5250	2.40	174.60	28	5727	1
20	5250	1.90	214.40	23	4664	0
21	5250	3.40	192.40	24	5198	1
22	5250	1.70	197.30	23	5068	1
23	5250	4.80	209.30	27	4778	1
24	5250	4.00	216.40	24	4621	1
25	5250	2.80	194.80	24	5133	1
26	5250	2.20	171.10	24	5845	0
27	5250	4.80	202.10	28	4948	1
28	5250	2.40	222.30	26	4498	1
29	5250	2.60	221.20	27	4521	1
30	5250	3.40	150.10	29	6662	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	8.30	317.00	17	3154.57	1
2	5250	6.40	248.30	18	4027.39	1
3	5250	9.80	254.50	17	3929.27	1
4	5250	7.50	336.60	18	2970.89	1
5	5250	10.00	346.20	16	2888.50	1
6	5250	7.20	474.20	18	2108.81	1
7	5250	6.10	435.30	17	2297.27	1
8	5250	6.40	446.30	16	2240.65	1
9	5250	9.60	408.30	18	2449.18	1
10	5250	7.40	238.40	18	4194.63	1
11	5250	9.50	403.20	16	2480.16	1
12	5250	8.70	270.80	18	3692.76	1
13	5250	8.90	203.40	18	4916.42	1
14	5250	8.50	442.70	18	2258.87	1
15	5250	6.50	367.40	16	2721.83	1
16	5250	6.10	205.50	17	4866.18	1
17	5250	7.70	301.80	16	3313.45	1
18	5250	8.90	482.10	17	2074.26	1
19	5250	6.50	359.30	17	2783.19	1
20	5250	7.50	206.30	16	4847.31	1
21	5250	8.60	443.00	16	2257.34	1
22	5250	8.80	334.20	18	2992.22	1
23	5250	7.40	408.40	16	2448.58	1
24	5250	9.40	261.30	16	3827.02	1
25	5250	6.90	370.00	17	2702.70	1
26	5250	7.30	368.40	16	2714.44	1
27	5250	7.60	492.70	17	2029.63	1
28	5250	7.70	272.50	18	3669.72	0
29	5250	8.70	346.00	17	2890.17	1
30	5250	6.80	254.80	18	3924.65	1
Detection Percentage (%)						96.67

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	12.00	444.20	14	2251	1
2	5250	12.50	250.80	14	3987	1
3	5250	19.10	302.10	15	3310	1
4	5250	17.00	379.80	15	2633	1
5	5250	15.20	266.50	13	3752	1
6	5250	13.60	323.50	15	3091	1
7	5250	18.50	276.10	14	3622	1
8	5250	17.00	249.30	13	4011	1
9	5250	16.70	403.60	13	2478	1
10	5250	13.20	390.20	13	2563	1
11	5250	14.60	392.00	16	2551	1
12	5250	11.90	379.80	13	2633	1
13	5250	18.50	268.70	12	3722	1
14	5250	16.00	324.40	14	3083	1
15	5250	16.10	301.50	16	3317	1
16	5250	19.90	434.80	15	2300	1
17	5250	15.00	239.90	14	4168	1
18	5250	15.80	493.70	15	2026	1
19	5250	14.10	437.10	12	2288	1
20	5250	13.00	292.30	12	3421	1
21	5250	11.50	223.20	15	4480	1
22	5250	14.70	297.70	15	3359	1
23	5250	19.80	398.00	15	2513	1
24	5250	16.30	468.80	16	2133	1
25	5250	17.10	430.80	15	2321	1
26	5250	18.60	408.40	14	2449	1
27	5250	11.20	340.90	13	2933	1
28	5250	11.10	390.00	16	2564	1
29	5250	12.50	393.90	14	2539	0
30	5250	19.60	378.80	14	2640	1
Detection Percentage (%)						96.67

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5250	1	64.3	9	1151.1	3	1
	5250	2	51.0	8	1019.0	2	
	5250	3	71.7	7	1949.5	2	
	5250	4	77.2	11	1744.5	2	
	5250	5	91.9	11	1467.3	1	
	5250	6	76.8	7	1410.4	3	
	5250	7	99.5	14	1211.4	3	
	5250	8	66.8	8	1622.1	3	
	5250	9	99.9	13	1827.7	1	
	5250	10	50.0	19	1853.3	3	
	5250	11	76.6	15	1028.2	2	
	5250	12	82.9	16	1034.3	2	
	5250	13	81.4	15	1870.5	3	
	5250	14	57.2	9	1073.0	1	
	5250	15	58.5	14	1198.0	3	
	5250	16	85.5	8	1598.2	1	
12	5250	1	90.8	6	1809.2	1	1
	5250	2	71.6	6	1116.1	2	
	5250	3	86.0	15	1873.6	2	
	5250	4	76.7	10	1228.6	2	
	5250	5	73.9	18	1769.3	2	
	5250	6	62.7	13	1415.6	1	
	5250	7	83.3	6	1166.3	2	
	5250	8	86.0	18	1819.0	3	
	5250	9	59.4	12	1518.3	2	
	5250	10	87.5	12	1927.1	3	
	5250	11	81.7	8	1702.1	2	
	5250	12	91.4	20	1808.9	3	
	5250	13	63.2	15	1743.9	2	
	5250	14	65.5	19	1685.8	3	
	5250	15	91.7	12	1552.6	1	
	5250	16	81.8	18	1021.4	2	
	5250	17	54.9	11	1052.0	3	
	5250	18	94.3	15	1757.1	1	
	5250	19	61.5	11	1610.0	1	
	5250	20	95.0	9	1182.2	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5250	1	85.1	17	1395.9	2	0
	5250	2	60.4	15	1258.6	1	
	5250	3	93.0	18	1470.3	2	
	5250	4	63.6	7	1223.4	1	
	5250	5	81.6	18	1700.3	3	
	5250	6	60.0	16	1897.9	2	
	5250	7	99.1	15	1560.2	2	
	5250	8	53.0	7	1879.1	3	
	5250	9	58.8	9	1866.5	3	
	5250	10	94.2	13	1986.4	3	
14	5250	1	62.0	6	1797.6	1	1
	5250	2	98.2	18	1522.5	2	
	5250	3	51.6	5	1760.3	2	
	5250	4	81.5	5	1182.7	3	
	5250	5	78.6	12	1612.1	3	
	5250	6	90.0	7	1781.1	1	
	5250	7	82.0	17	1169.1	3	
	5250	8	78.0	6	1120.1	2	
	5250	9	54.7	17	1116.0	1	
	5250	10	56.7	16	1504.8	2	
	5250	11	51.7	13	1585.7	3	
	5250	12	86.6	8	1808.9	2	
	5250	13	77.2	12	1989.2	1	
	5250	14	80.4	13	1932.7	1	
	5250	15	73.1	15	1005.3	2	
	5250	16	78.2	7	1719.0	1	
	5250	17	99.5	15	1488.4	3	
	5250	18	72.7	13	1596.3	3	
	5250	19	63.9	14	1214.1	3	
	5250	20	81.7	14	1973.3	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5250	1	64.6	11	1876.1	1	1
	5250	2	92.6	13	1422.9	1	
	5250	3	99.6	6	1053.3	3	
	5250	4	89.3	18	1601.7	2	
	5250	5	62.1	17	1438.6	2	
	5250	6	60.9	15	1196.1	3	
	5250	7	72.3	20	1512.0	2	
	5250	8	73.3	9	1333.7	1	
	5250	9	82.5	9	1190.1	2	
	5250	10	59.2	6	1069.7	2	
	5250	11	69.3	12	1476.9	3	
	5250	12	97.2	17	1235.8	3	
	5250	13	93.1	20	1069.8	1	
	5250	14	98.6	16	1324.4	2	
	5250	15	53.5	17	1303.3	3	
	5250	16	58.8	9	1143.2	1	
	5250	17	51.6	12	1407.3	3	
	5250	18	68.6	19	1488.8	3	
	5250	19	65.7	5	1124.0	2	
16	5250	1	94.4	14	1675.4	3	1
	5250	2	67.6	16	1403.1	2	
	5250	3	63.5	9	1276.2	3	
	5250	4	87.8	19	1642.3	2	
	5250	5	66.2	20	1761.9	3	
	5250	6	86.5	19	1892.6	3	
	5250	7	94.2	9	1686.0	1	
	5250	8	52.8	11	1907.9	1	
	5250	9	77.9	14	1522.0	1	
	5250	10	56.0	15	1851.2	3	
	5250	11	93.3	11	1673.0	2	
	5250	12	67.9	11	1193.9	3	
	5250	13	51.0	9	1524.9	3	
	5250	14	59.0	12	1333.9	1	
	5250	15	66.9	15	1371.6	3	
	5250	16	77.8	11	1397.4	3	
	5250	17	76.3	14	1665.5	1	
	5250	18	85.2	19	1137.7	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5250	1	84.7	6	1984.0	3	1
	5250	2	83.8	11	1635.6	3	
	5250	3	93.9	11	1188.4	3	
	5250	4	71.5	18	1993.9	2	
	5250	5	71.1	16	1143.3	1	
	5250	6	63.2	11	1660.3	3	
	5250	7	82.2	14	1137.6	2	
	5250	8	98.4	10	1223.0	1	
	5250	9	51.2	15	1954.1	3	
	5250	10	73.8	9	1461.2	2	
	5250	11	52.6	7	1807.8	1	
	5250	12	64.0	16	1324.7	2	
	5250	13	67.0	16	1035.5	1	
	5250	14	76.3	12	1298.9	2	
	5250	15	84.2	8	1051.6	3	
	5250	16	66.1	8	1862.3	1	
	5250	17	73.2	18	1770.6	3	
18	5250	1	63.5	12	1540.8	2	1
	5250	2	96.2	14	1279.4	1	
	5250	3	62.2	9	1237.8	1	
	5250	4	76.2	8	1208.1	3	
	5250	5	66.2	18	1041.0	3	
	5250	6	90.3	10	1019.2	2	
	5250	7	82.1	7	1108.0	2	
	5250	8	91.3	6	1183.3	2	
	5250	9	65.2	18	1140.3	2	
	5250	10	89.1	17	1563.1	1	
	5250	11	96.4	14	1663.9	1	
	5250	12	75.3	7	1004.4	1	
	5250	13	86.2	14	1347.4	1	
	5250	14	77.1	13	1917.3	1	
	5250	15	98.2	10	1952.3	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5250	1	65.2	18	1468.0	2	1
	5250	2	82.0	14	1757.1	1	
	5250	3	51.0	12	1104.2	1	
	5250	4	93.2	14	1767.8	2	
	5250	5	65.0	14	1242.5	1	
	5250	6	82.2	13	1930.9	3	
	5250	7	98.8	12	1017.6	1	
	5250	8	85.3	7	1707.4	3	
	5250	9	57.6	19	1258.9	1	
	5250	10	59.0	6	1887.5	3	
	5250	11	77.8	8	1433.0	2	
	5250	12	78.9	10	1890.4	2	
	5250	13	84.8	10	1710.2	1	
	5250	14	85.0	7	1396.8	3	
20	5250	1	59.7	6	1371.4	3	1
	5250	2	57.1	5	1252.8	1	
	5250	3	73.2	11	1990.8	1	
	5250	4	84.5	19	1135.8	3	
	5250	5	84.3	18	1352.9	2	
	5250	6	96.7	17	1030.7	1	
	5250	7	74.0	6	1097.4	3	
	5250	8	58.6	5	1194.3	2	
	5250	9	88.3	12	1463.0	3	
	5250	10	90.4	7	1884.7	3	
21	5286	1	56.6	7	1312.1	2	1
	5282	2	52.9	17	1866.5	2	
	5287	3	56.1	6	1899.0	3	
	5283	4	91.4	15	1559.8	2	
	5282	5	63.7	18	1089.4	1	
	5282	6	96.1	18	1306.0	2	
	5287	7	66.5	5	1860.7	2	
	5287	8	61.8	5	1551.4	1	
	5283	9	89.0	16	1903.5	3	
	5287	10	61.2	5	1541.6	2	
	5282	11	98.0	17	1769.2	2	
	5284	12	89.0	13	1709.3	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5284	1	90.6	12	1240.5	2	1
	5281	2	86.8	19	1055.8	3	
	5284	3	52.1	13	1792.9	2	
	5281	4	75.2	19	1660.3	2	
	5286	5	95.0	8	1317.4	3	
	5286	6	91.8	8	1230.0	1	
	5282	7	55.9	17	1062.5	2	
	5282	8	66.7	18	1032.8	2	
	5285	9	74.0	11	1951.9	2	
23	5287	1	96.3	6	1354.3	3	1
	5283	2	65.4	14	1679.4	3	
	5285	3	89.5	11	1046.8	1	
	5281	4	83.6	19	1278.1	2	
	5281	5	92.1	20	1162.0	3	
	5282	6	76.3	18	1550.3	3	
	5286	7	60.4	8	1152.6	2	
	5281	8	77.2	19	1369.8	2	
	5286	9	55.8	8	1052.8	2	
	5285	10	86.7	10	1210.2	1	
	5283	11	55.6	16	1828.0	1	
	5281	12	59.4	19	1331.2	1	
	5282	13	54.5	17	1749.5	2	
	5282	14	64.1	17	1365.0	1	
	5287	15	84.5	5	1829.5	2	
24	5286	1	94.3	7	1966.2	1	1
	5281	2	60.4	19	1961.4	2	
	5284	3	68.5	12	1468.9	3	
	5284	4	99.1	13	1441.7	2	
	5281	5	69.8	19	1110.8	2	
	5285	6	76.6	9	1182.0	1	
	5283	7	82.3	14	1823.8	3	
	5287	8	55.2	6	1589.7	1	
	5285	9	91.9	10	1977.7	2	
	5282	10	65.2	18	1761.1	3	
	5283	11	57.1	16	1394.3	1	
	5286	12	61.7	7	1833.1	3	
	5284	13	76.4	13	1432.3	2	
	5286	14	95.0	7	1571.9	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5286	1	51.6	7	1735.6	3	0
	5283	2	74.0	15	1798.6	1	
	5285	3	94.6	10	1963.5	2	
	5285	4	63.2	11	1627.3	1	
	5285	5	54.2	11	1723.3	1	
	5282	6	94.0	17	1000.7	2	
	5285	7	61.1	10	1056.5	3	
	5283	8	72.9	16	1755.4	2	
	5285	9	95.3	11	1393.2	3	
	5284	10	97.6	12	1197.4	1	
	5286	11	69.4	8	1861.4	3	
	5282	12	92.8	17	1282.6	3	
	5284	13	61.0	13	1199.3	2	
	5281	14	74.4	19	1711.8	2	
	5284	15	52.0	12	1383.1	2	
	5283	16	52.0	15	1936.6	3	
	5286	17	72.2	7	1884.8	1	
	5283	18	57.5	16	1136.7	2	
26	5282	1	51.4	18	1684.5	3	1
	5282	2	81.5	18	1821.7	2	
	5281	3	60.4	20	1193.3	1	
	5285	4	72.0	9	1668.5	3	
	5281	5	51.8	20	1735.1	1	
	5283	6	61.9	15	1818.3	3	
	5285	7	52.5	11	1950.8	2	
	5282	8	67.0	17	1951.4	3	
	5283	9	75.5	14	1292.5	1	
	5284	10	89.5	12	1943.8	3	
	5287	11	74.1	6	1667.8	2	
	5285	12	77.3	11	1814.6	2	
	5284	13	94.0	12	1207.5	1	
	5286	14	72.3	7	1438.2	1	
	5286	15	85.4	7	1477.6	2	
	5287	16	85.5	5	1833.3	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5284	1	94.7	13	1790.8	1	1
	5282	2	74.1	18	1005.5	2	
	5285	3	88.8	9	1900.4	2	
	5285	4	79.7	10	1536.7	3	
	5282	5	52.4	18	1765.4	3	
	5284	6	94.7	12	1180.1	3	
	5286	7	64.9	8	1719.4	1	
	5282	8	89.5	17	1167.6	1	
	5283	9	92.4	15	1369.4	3	
	5283	10	70.3	14	1907.0	3	
	5285	11	72.3	10	1951.2	1	
	5286	12	80.3	8	1958.5	1	
	5286	13	62.4	7	1146.8	1	
	5282	14	67.1	17	1895.9	1	
	5285	15	55.2	11	1485.5	1	
	5281	16	65.1	19	1663.0	1	
	5284	17	65.1	13	1630.2	3	
	5285	18	64.3	10	1939.1	3	
	5285	19	58.4	10	1314.3	1	
	5283	20	61.6	16	1765.9	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5284	1	57.9	12	1083.9	1	1
	5281	2	52.9	19	1075.3	2	
	5283	3	80.3	14	1493.0	3	
	5285	4	74.8	11	1253.7	2	
	5283	5	81.5	14	1017.8	2	
	5284	6	93.1	13	1167.5	1	
	5285	7	65.0	9	1247.5	3	
	5281	8	93.8	19	1829.0	2	
	5283	9	54.5	14	1834.6	2	
	5286	10	56.7	8	1118.8	3	
	5283	11	59.5	15	1981.2	1	
	5285	12	69.0	10	1327.3	3	
	5282	13	60.0	17	1226.2	2	
	5285	14	70.3	11	1212.6	1	
	5286	15	73.6	8	1547.0	1	
	5285	16	70.6	10	1901.2	3	
	5283	17	92.4	16	1562.6	1	
	5283	18	94.0	15	1375.6	3	
	5285	19	79.7	11	1158.4	2	
	5286	20	52.6	7	1841.6	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5287	1	96.4	6	1576.4	1	1
	5287	2	85.9	6	1064.2	1	
	5286	3	89.3	7	1720.1	2	
	5283	4	70.1	14	1105.0	3	
	5283	5	53.4	16	1411.6	1	
	5281	6	58.5	19	1802.8	3	
	5281	7	99.3	19	1320.7	1	
	5286	8	65.5	8	1280.6	2	
	5283	9	79.0	14	1272.5	3	
	5284	10	57.7	13	1076.3	2	
	5286	11	78.8	7	1152.5	2	
	5282	12	71.3	18	1022.5	1	
	5282	13	74.7	18	1933.9	2	
	5283	14	83.8	15	1173.6	1	
	5284	15	54.3	12	1076.3	3	
	5287	16	97.0	6	1890.1	3	
	5285	17	65.7	9	1919.9	2	
30	5285	1	89.2	10	1331.5	3	1
	5282	2	92.4	17	1502.1	3	
	5285	3	56.4	11	1134.3	1	
	5282	4	71.5	17	1878.0	1	
	5283	5	71.0	15	1110.6	3	
	5285	6	55.8	9	1305.7	1	
	5282	7	63.4	18	1301.9	1	
	5285	8	62.0	11	1142.5	3	
	5287	9	55.3	6	1698.9	2	
	5282	10	55.8	17	1246.0	2	
	5285	11	76.3	9	1578.5	2	
	5283	12	90.8	14	1120.7	1	
	5284	13	84.8	13	1046.6	3	
	5286	14	57.7	7	1818.9	2	
Detection Percentage (%)							93.33

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Bridge

Test Mode		802.11be EHT20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5300	Type1	Table 5a	1	29	1	96.67%	≥ 60%

Test Mode		802.11be EHT40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5310	Type1	Table 5a	1	28	2	93.33%	≥ 60%

Test Mode		802.11be EHT80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5290	Type1	Table 5a	1	26	4	86.67%	≥ 60%

Test Mode		802.11be EHT160					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5250	Type1	Table 5a	1	28	2	93.33%	≥ 60%

Test Mode	802.11be EHT20					
Frequency	5300 MHz					
Radar Signal	Type 1					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	1	738	72	1355	1
2	5300	1	738	72	1355	1
3	5300	1	818	65	1222	1
4	5300	1	3066	18	326	1
5	5300	1	538	99	1859	1
6	5300	1	518	102	1931	1
7	5300	1	718	74	1393	1
8	5300	1	3066	18	326	1
9	5300	1	878	61	1139	1
10	5300	1	718	74	1393	1
11	5300	1	538	99	1859	1
12	5300	1	938	57	1066	0
13	5300	1	598	89	1672	1
14	5300	1	598	89	1672	1
15	5300	1	518	102	1931	1
16	5300	1	2400	22	417	1
17	5300	1	2891	19	346	1
18	5300	1	1056	50	947	1
19	5300	1	1991	27	502	1
20	5300	1	707	75	1414	1
21	5300	1	2697	20	371	1
22	5300	1	2759	20	362	1
23	5300	1	2688	20	372	1
24	5300	1	832	64	1202	1
25	5300	1	2677	20	374	1
26	5300	1	541	98	1848	1
27	5300	1	2120	25	472	1
28	5300	1	2981	18	335	1
29	5300	1	2982	18	335	1
30	5300	1	2125	25	471	1
Detection Percentage (%)						96.67

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1	698	76	1433	1
2	5310	1	518	102	1931	1
3	5310	1	558	95	1792	1
4	5310	1	618	86	1618	1
5	5310	1	598	89	1672	1
6	5310	1	918	58	1089	1
7	5310	1	638	83	1567	1
8	5310	1	818	65	1222	1
9	5310	1	678	78	1475	1
10	5310	1	638	83	1567	1
11	5310	1	558	95	1792	1
12	5310	1	758	70	1319	1
13	5310	1	518	102	1931	1
14	5310	1	878	61	1139	1
15	5310	1	838	63	1193	1
16	5310	1	2416	22	414	1
17	5310	1	2024	27	494	1
18	5310	1	1759	31	569	1
19	5310	1	2765	20	362	1
20	5310	1	2602	21	384	1
21	5310	1	1935	28	517	1
22	5310	1	1228	43	814	1
23	5310	1	1700	32	588	1
24	5310	1	610	87	1639	0
25	5310	1	937	57	1067	1
26	5310	1	695	76	1439	1
27	5310	1	1988	27	503	0
28	5310	1	697	76	1435	1
29	5310	1	1334	40	750	1
30	5310	1	1476	36	678	1
Detection Percentage (%)						93.33

Test Mode	802.11be EHT80					
Frequency	5290 MHz					
Radar Signal	Type 1					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1	618	86	1618	0
2	5290	1	898	59	1114	0
3	5290	1	578	92	1730	1
4	5290	1	518	102	1931	1
5	5290	1	718	74	1393	1
6	5290	1	698	76	1433	1
7	5290	1	918	58	1089	1
8	5290	1	678	78	1475	1
9	5290	1	758	70	1319	1
10	5290	1	538	99	1859	1
11	5290	1	798	67	1253	1
12	5290	1	778	68	1285	1
13	5290	1	538	99	1859	0
14	5290	1	558	95	1792	1
15	5290	1	938	57	1066	1
16	5290	1	740	72	1351	1
17	5290	1	1344	40	744	1
18	5290	1	2672	20	374	1
19	5290	1	2625	21	381	1
20	5290	1	1364	39	733	1
21	5290	1	2194	25	456	1
22	5290	1	2643	20	378	1
23	5290	1	1268	42	789	1
24	5290	1	1471	36	680	1
25	5290	1	1465	37	683	1
26	5290	1	1289	41	776	1
27	5290	1	586	91	1706	1
28	5290	1	2109	26	474	1
29	5290	1	709	75	1410	0
30	5290	1	943	56	1060	1
Detection Percentage (%)						86.67

Test Mode	802.11be EHT160					
Frequency	5250 MHz					
Radar Signal	Type 1					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	1	898	59	1114	1
2	5250	1	678	78	1475	1
3	5250	1	578	92	1730	0
4	5250	1	538	99	1859	1
5	5250	1	538	99	1859	1
6	5250	1	738	72	1355	1
7	5250	1	538	99	1859	0
8	5250	1	898	59	1114	1
9	5250	1	558	95	1792	1
10	5250	1	878	61	1139	1
11	5250	1	658	81	1520	1
12	5250	1	698	76	1433	1
13	5250	1	678	78	1475	1
14	5250	1	518	102	1931	1
15	5250	1	538	99	1859	1
16	5250	1	1616	33	619	1
17	5250	1	1815	30	551	1
18	5250	1	1195	45	837	1
19	5250	1	1665	32	601	1
20	5250	1	2476	22	404	1
21	5250	1	1434	37	697	1
22	5250	1	2897	19	345	1
23	5250	1	923	58	1083	1
24	5250	1	2824	19	354	1
25	5250	1	894	60	1119	1
26	5250	1	1860	29	538	1
27	5250	1	633	84	1580	1
28	5250	1	2526	21	396	1
29	5250	1	2474	22	404	1
30	5250	1	2975	18	336	1
Detection Percentage (%)						93.33

---END---