



Test Graphs

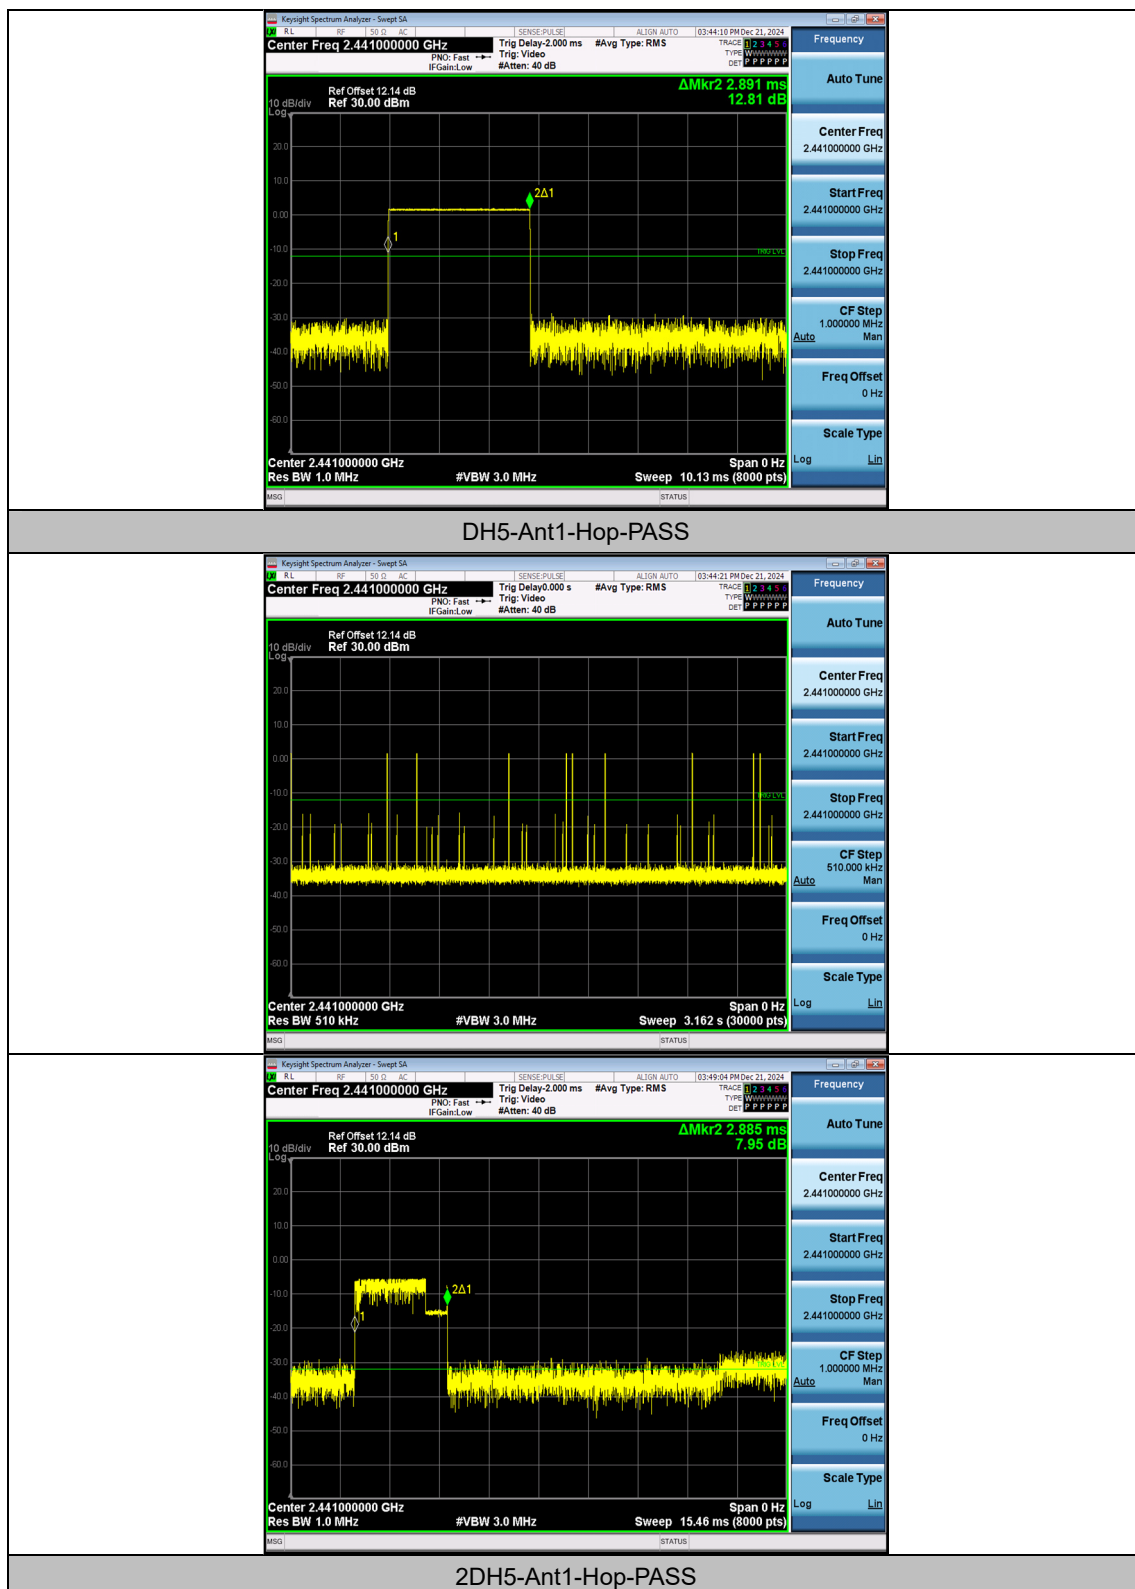

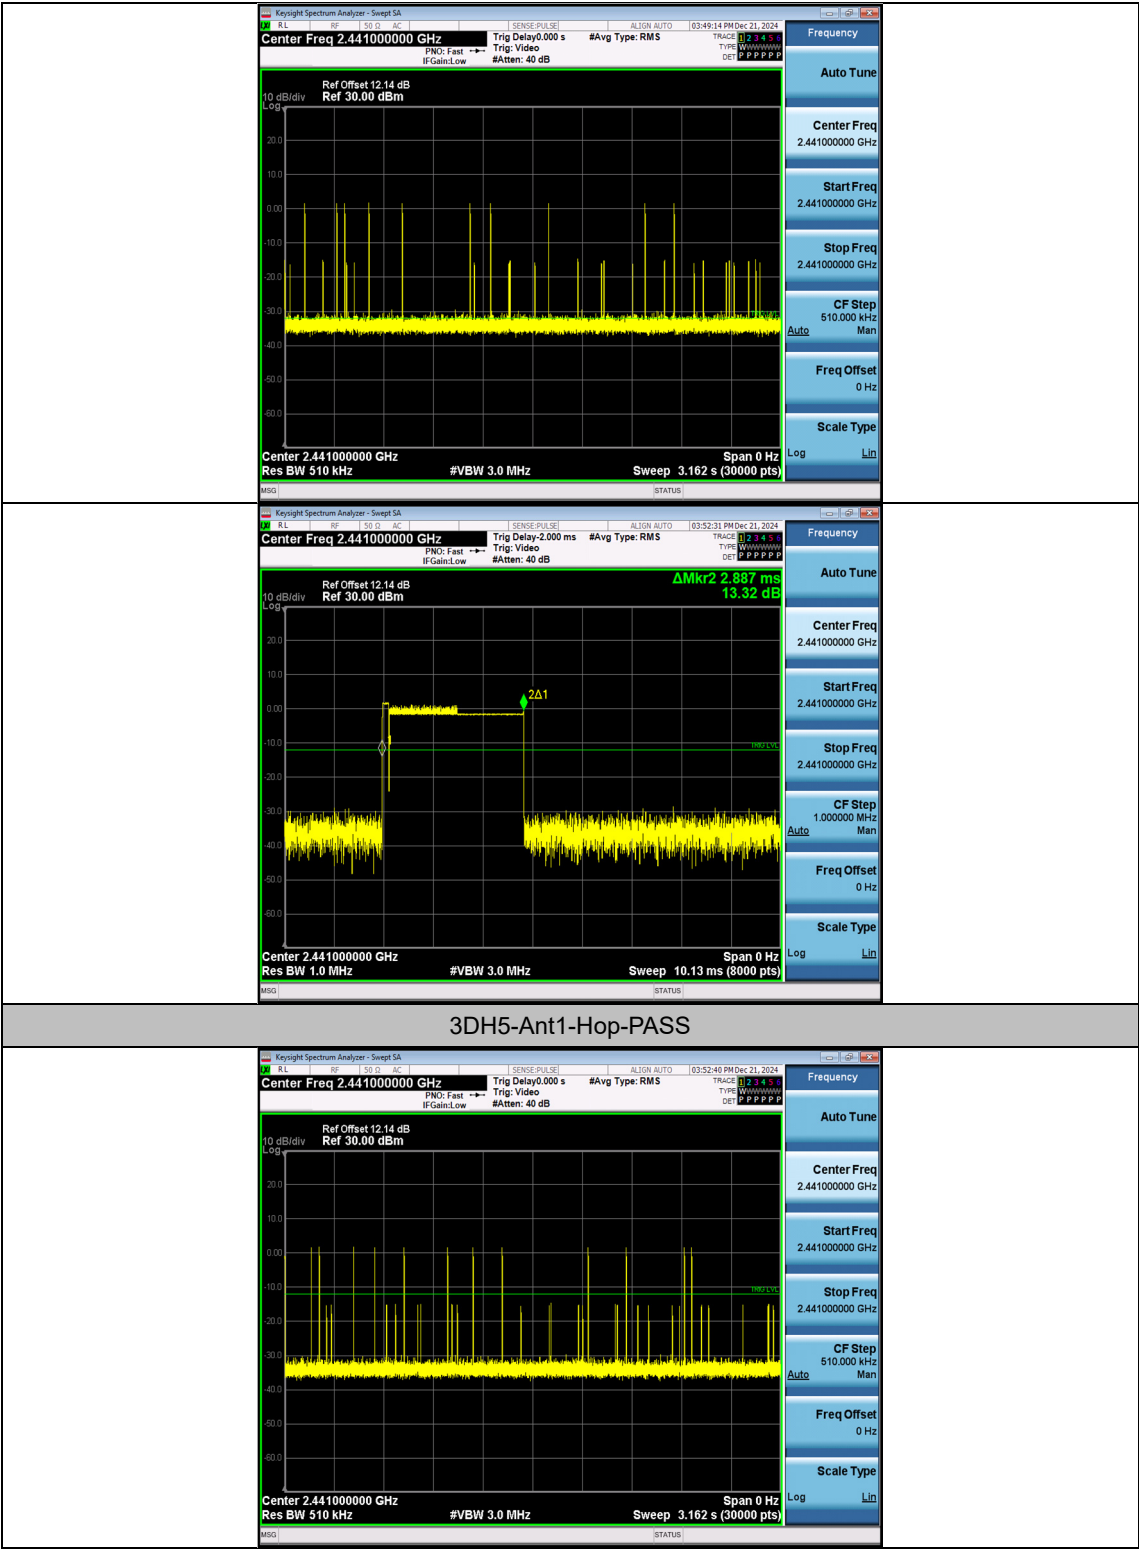


Appendix E: Number of hopping channels

Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

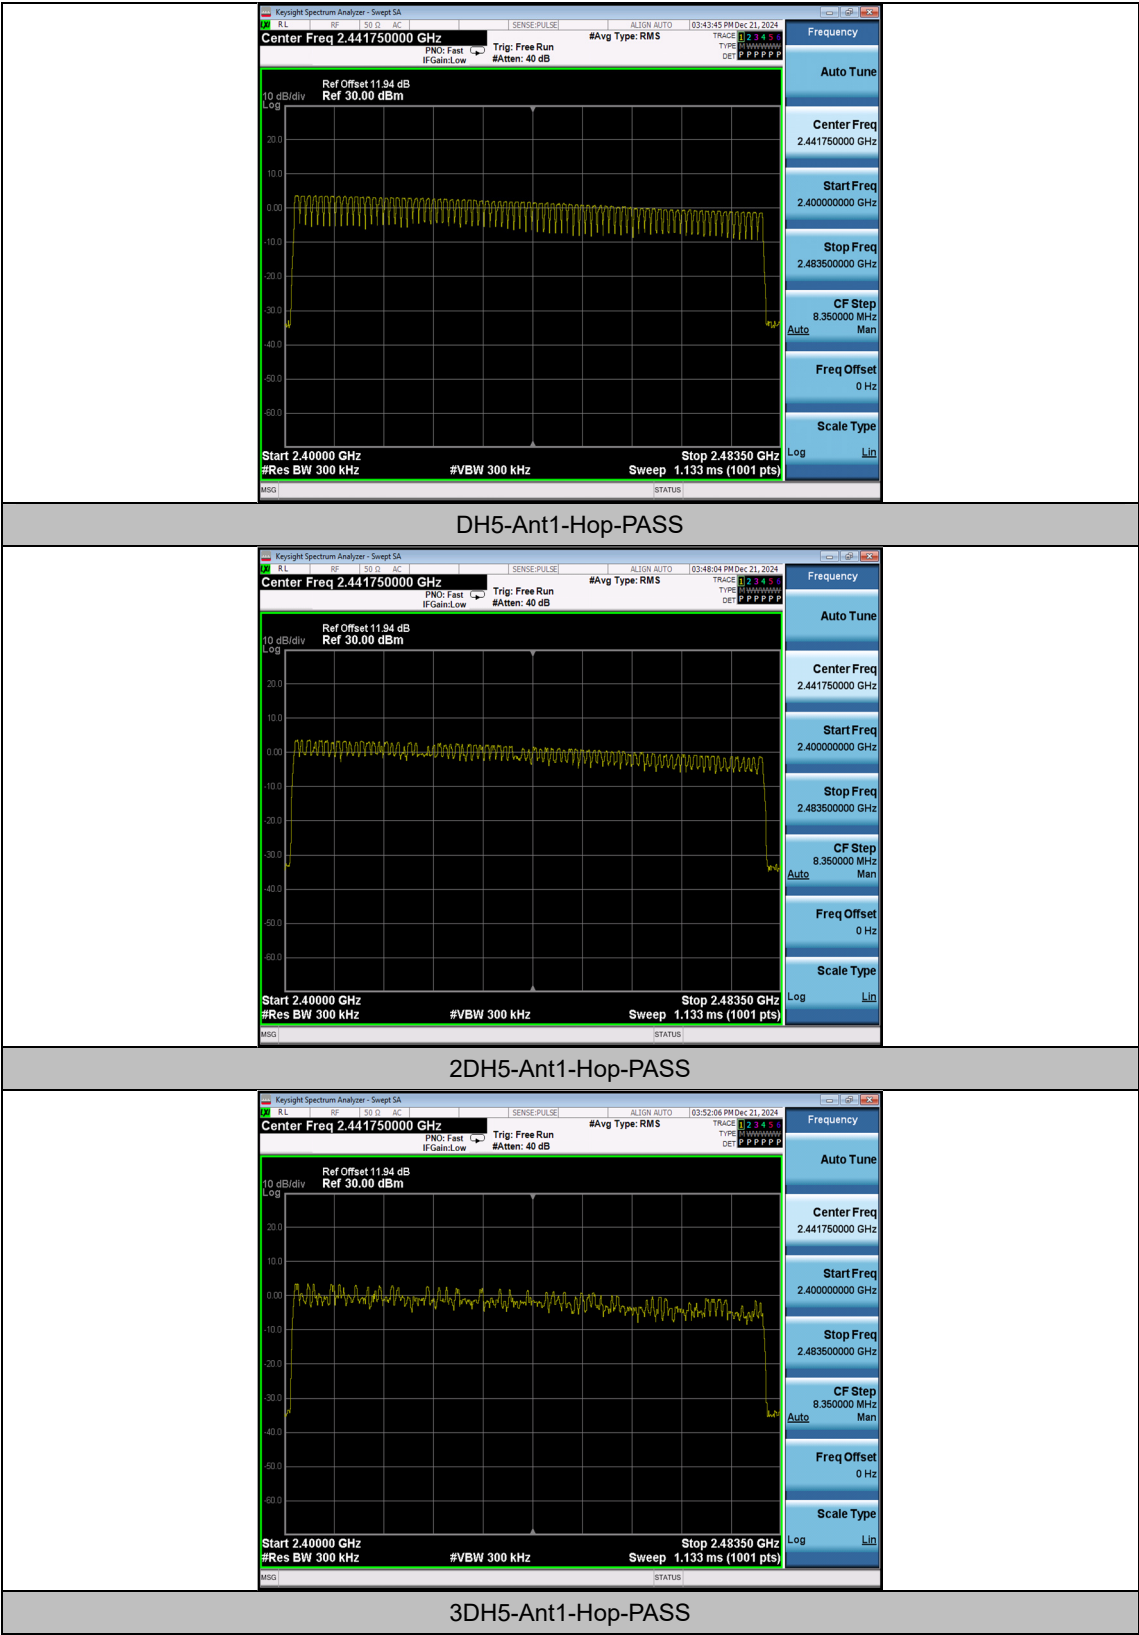



Appendix F: Reference level measurement


Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
DH5	Ant1	2402	2402.19	3.69
DH5	Ant1	2441	2440.84	1.81
DH5	Ant1	2480	2480.18	-1.37
2DH5	Ant1	2402	2401.85	3.54
2DH5	Ant1	2441	2441.02	1.46
2DH5	Ant1	2480	2479.82	-1.59
3DH5	Ant1	2402	2401.86	3.26
3DH5	Ant1	2441	2440.84	1.81
3DH5	Ant1	2480	2479.84	-1.39

Test Graphs

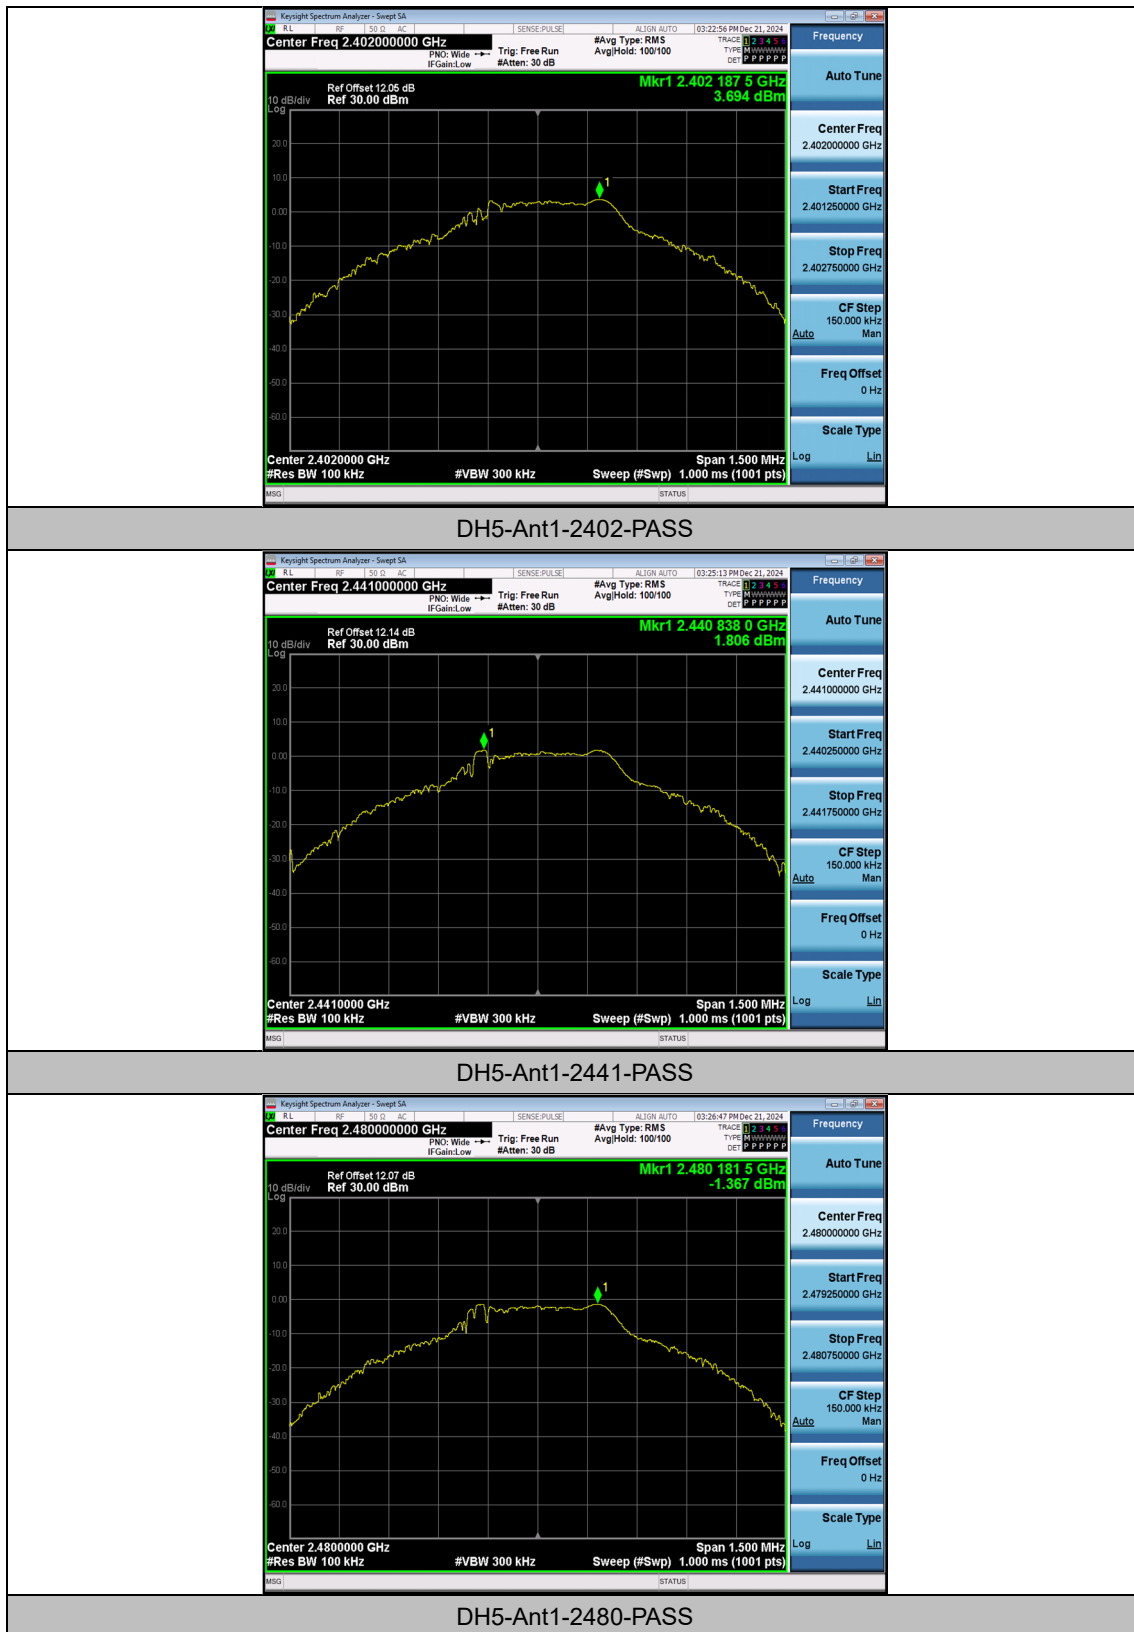

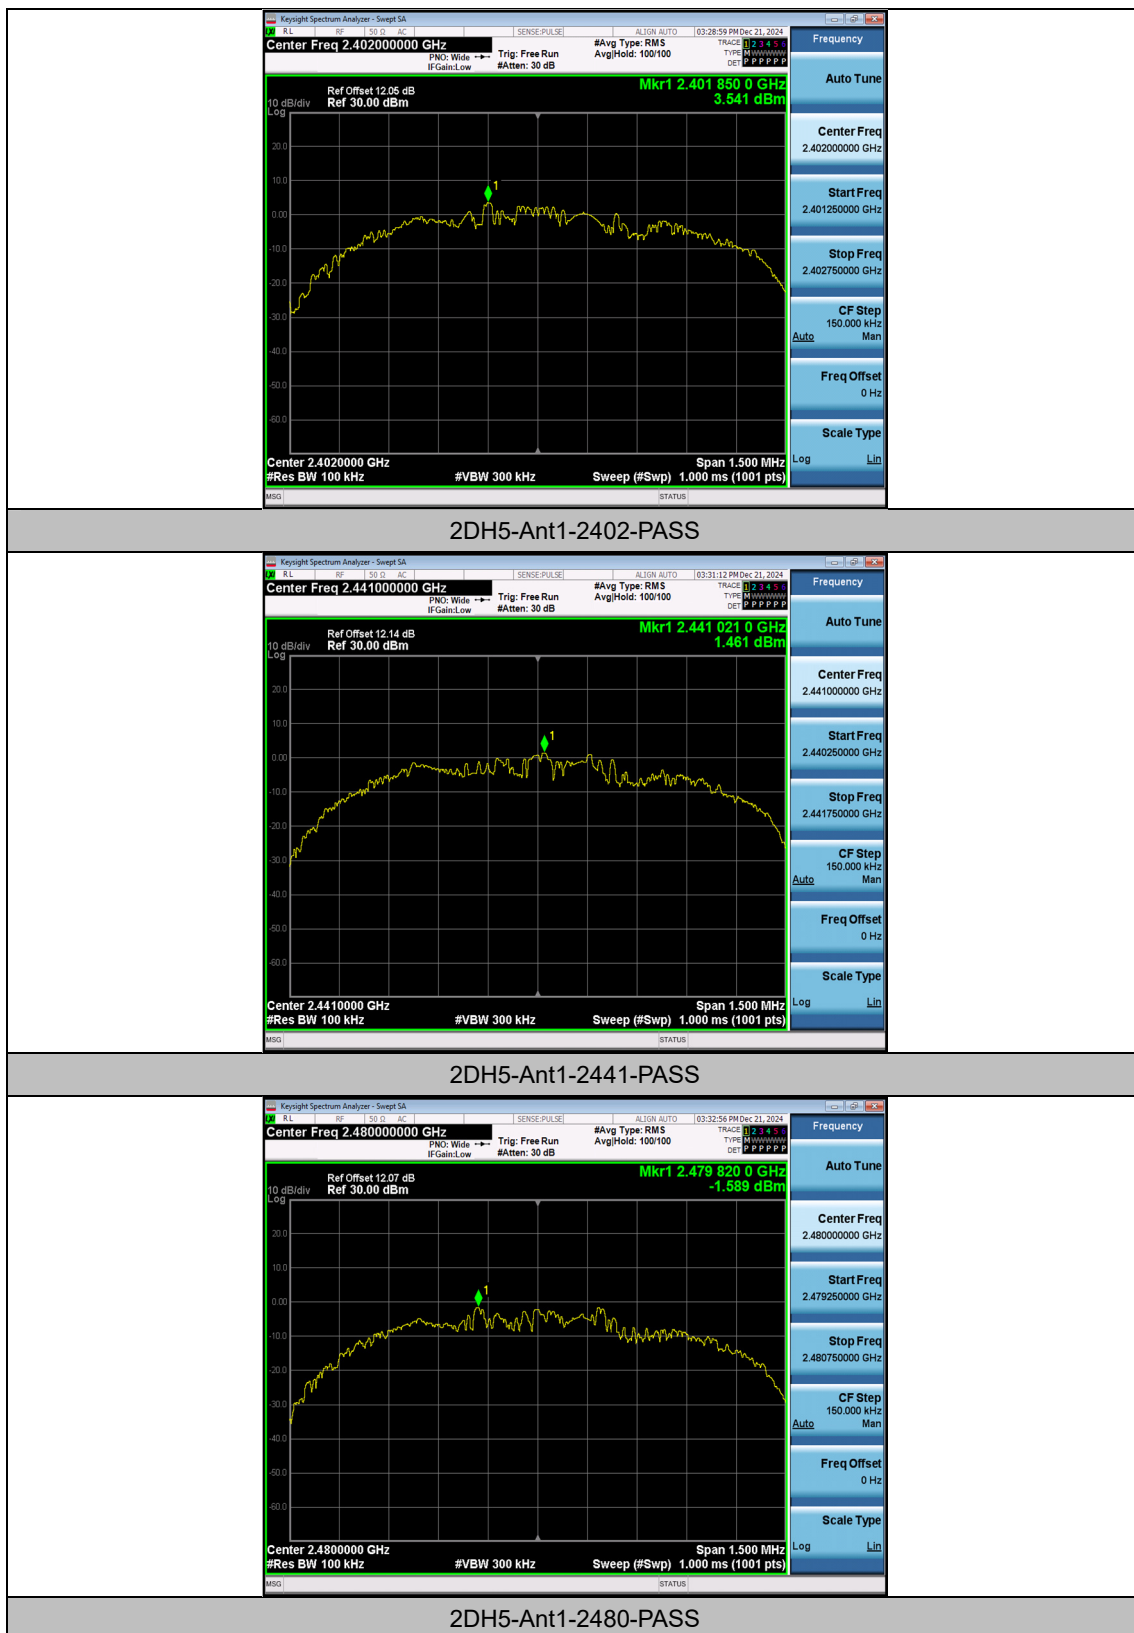

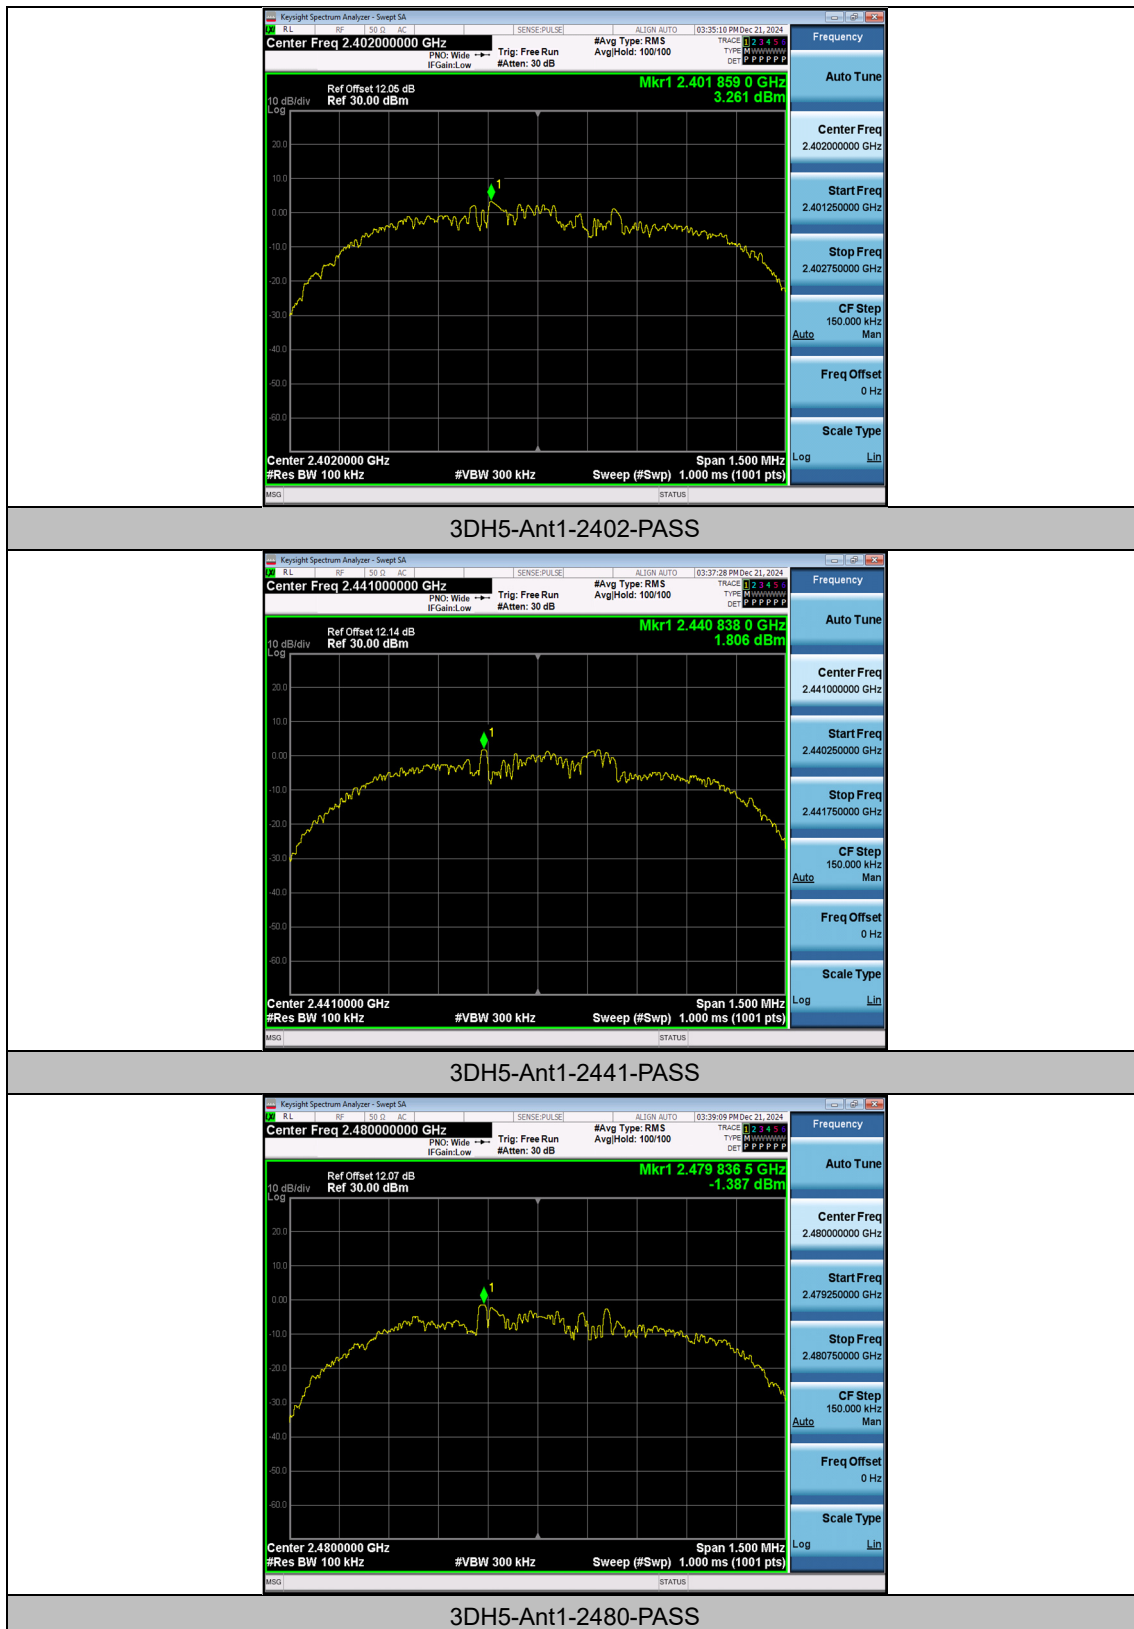

Appendix G: Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	3.69	-41.12	≤ -16.31	PASS
DH5	Ant1	High	2480	-1.37	-46.97	≤ -21.37	PASS
DH5	Ant1	Low	Hop_2402	2.86	-40.48	≤ -17.14	PASS
DH5	Ant1	High	Hop_2480	-1.11	-43.84	≤ -21.11	PASS
2DH5	Ant1	Low	2402	3.54	-40.48	≤ -16.46	PASS
2DH5	Ant1	High	2480	-1.59	-46.76	≤ -21.59	PASS
2DH5	Ant1	Low	Hop_2402	3.42	-41.18	≤ -16.58	PASS
2DH5	Ant1	High	Hop_2480	-3.09	-45.96	≤ -23.09	PASS
3DH5	Ant1	Low	2402	3.26	-42.51	≤ -16.74	PASS
3DH5	Ant1	High	2480	-1.39	-46.55	≤ -21.39	PASS
3DH5	Ant1	Low	Hop_2402	2.41	-41.73	≤ -17.59	PASS
3DH5	Ant1	High	Hop_2480	-3.43	-46.41	≤ -23.43	PASS

Test Graphs

