



Report No.: WSCT-ANAB-R&E240900047A-RF

## Low Band Edge WCDMA Band 4 CH 1312

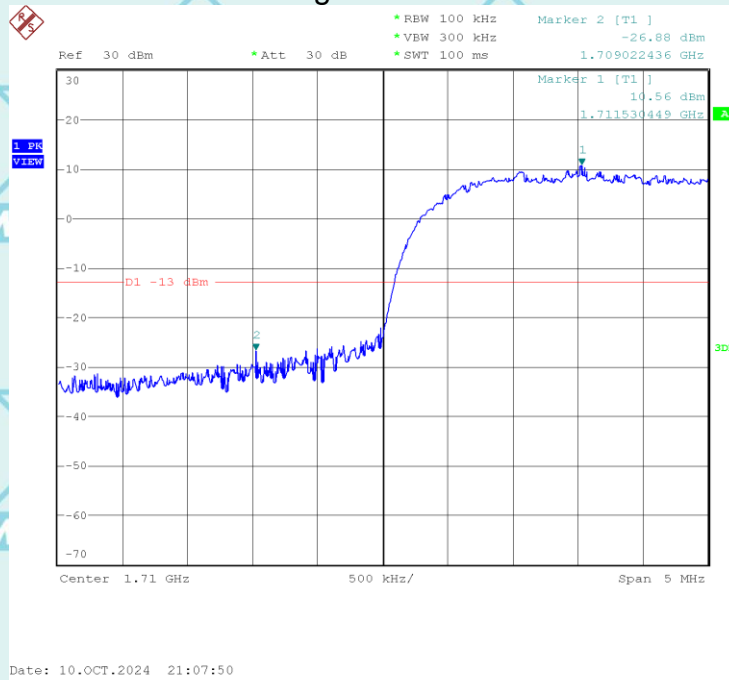


## Low Band Edge WCDMA Band 4 CH 1513

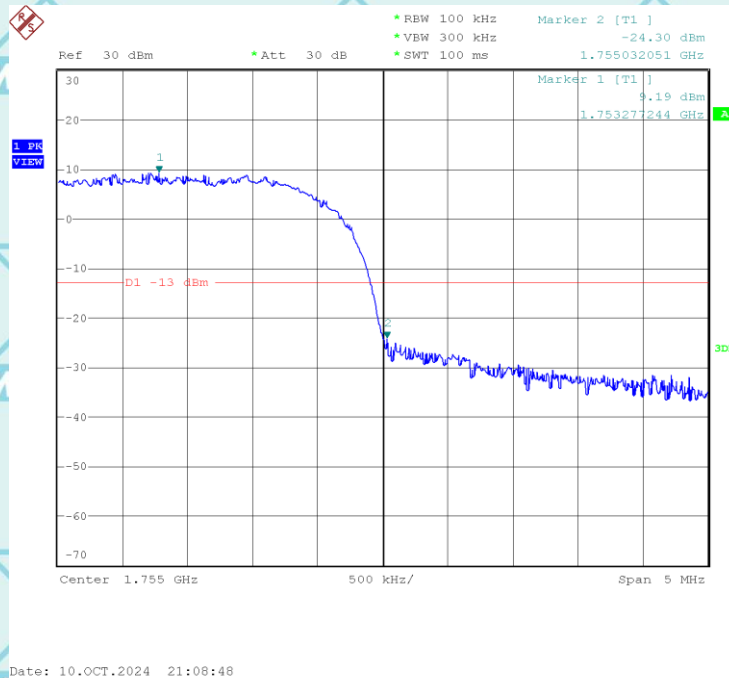


Report No.: WSCT-ANAB-R&E240900047A-RF

### Low Band Edge WCDMA Band 5 CH 4132

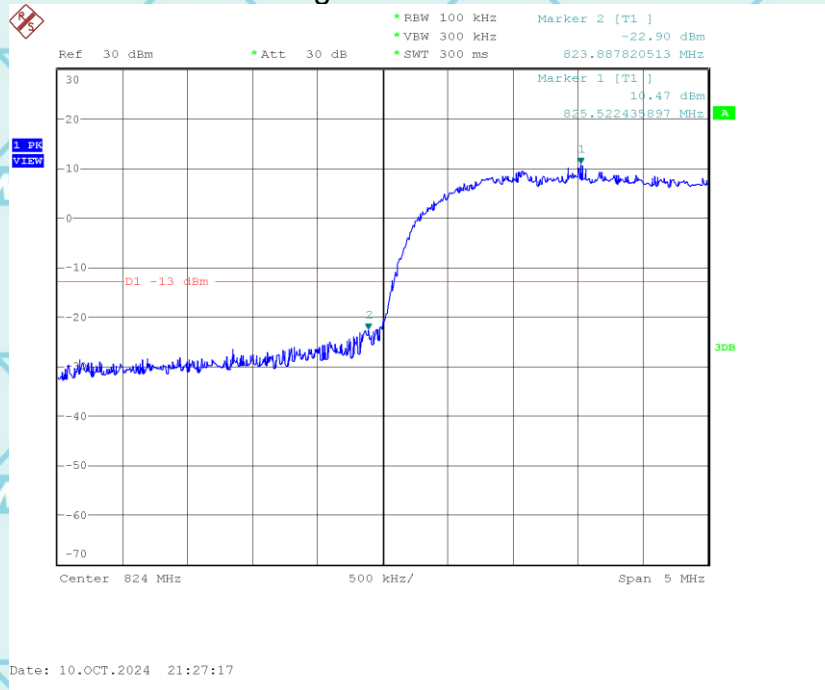

### High Band Edge WCDMA Band 5 CH 4233

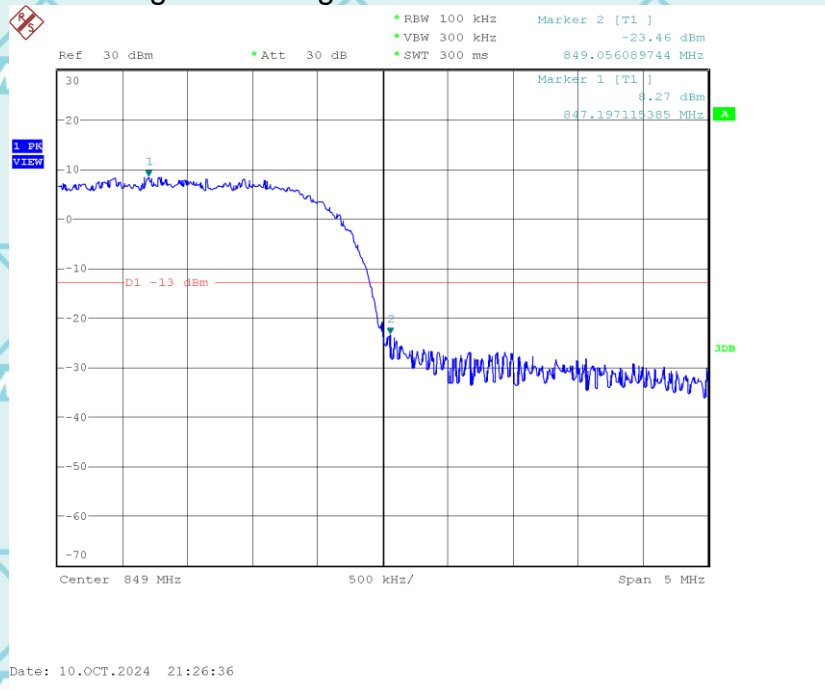

Note: Please refer to Annex (LTE Band Edge) for more test data



Report No.: WSCT-ANAB-R&amp;E240900047A-RF

## 11. SPURIOUS EMISSION (Conducted and Radiated)

### 11.1. Measurement Result (Pre-measurement)

#### GSM850:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	0.2	128	824.2	Pass
Middle Range	0.2	190	836.6	Pass
High Range	0.2	251	848.8	Pass

#### PCS 1900 :

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	0.2	512	1850.2	Pass
Middle Range	0.2	661	1880.0	Pass
High Range	0.2	810	1909.8	Pass



Report No.: WSCT-ANAB-R&amp;E240900047A-RF

## UTRA BANDS

### Band 2:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	5	9262	1852.4	Pass
Middle Range	5	9400	1880.0	Pass
High Range	5	9538	1907.6	Pass

### Band 4:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	5	1312	1712.4	Pass
Middle Range	5	1413	1732.6	Pass
High Range	5	1513	1752.6	Pass

### Band 5:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	5	4132	826.4	Pass
Middle Range	5	4182	836.4	Pass
High Range	5	4233	846.6	Pass



Report No.: WSCT-ANAB-R&E240900047A-RF

## Test Plot(s)

### Conducted method

#### Test limit:


The spurious (unwanted) emission limits specified in the individual FCC rule parts applicable to licensed digital transmitters (typically referred to under the heading 'emission limits') normally apply to any and all emissions that are present outside of the authorized frequency band/block and apply to emissions in both the out-of-band and spurious domains. In some rule parts, the unwanted emission limits are specified by an emission mask that defines the applicable limit as a function of the frequency range relative to the authorized frequency block.

Typically, unwanted emissions are required by the licensed rule parts to be attenuated below the transmitter power by a factor of at least  $X + 10\log(P)$  dB, where P represents the transmitter power expressed in watts and X is a specified scalar value (e.g., 43). This specification can be interpreted in one of two equivalent ways. First, the required attenuation can be construed to be relative to the mean carrier power, with the resultant of the equation  $X + 10\log(P)$  being expressed in dBC (dB relative to the maximum carrier power). Alternatively, the specification can be interpreted as an absolute limit when the specified attenuation is actually subtracted from the maximum permissible transmitter power [i.e.,  $10\log(P) - \{X + 10\log(P)\}$ ], resulting in an absolute level of -X dBW [or  $(-X + 30)$  dBm]. See section 4.

#### Test procedure:


The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz below 1 GHz and 1 MHz above 1 GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonics.

#### Conducted Emission Test-Up:

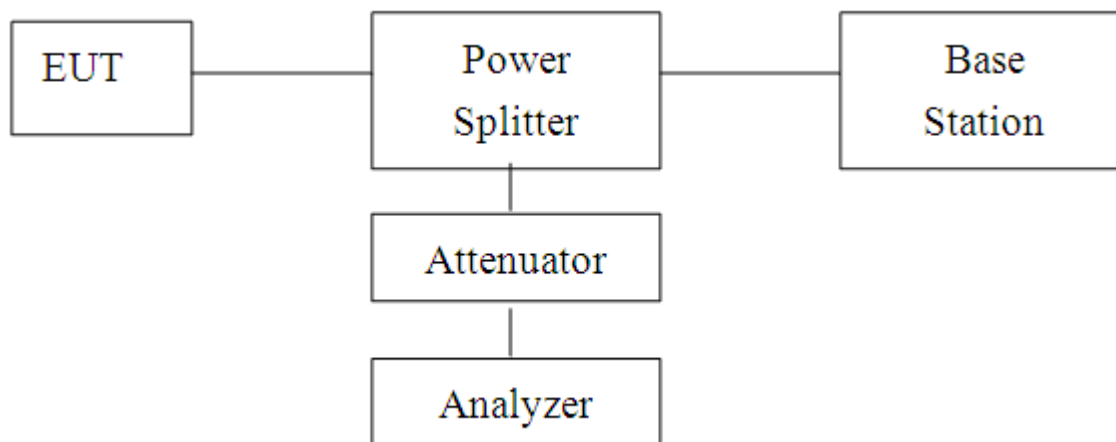

Report No.: WSCT-ANAB-R&E240900047A-RF

# CONDUCTED EMISSION IN GSM850 Band Conducted Emission Transmitting Mode CH 128 30MHz – 1GHz

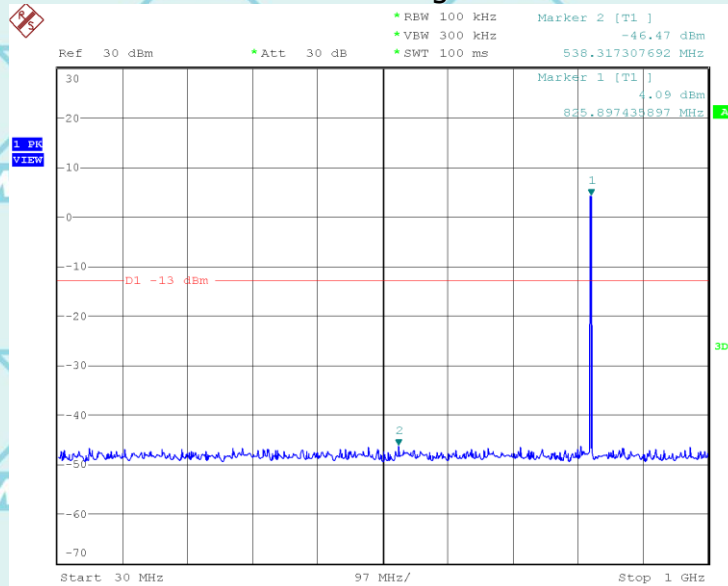


Date: 10.OCT.2024 19:18:04




Report No.: WSCT-ANAB-R&E240900047A-RF

### Conducted Emission Transmitting Mode CH 128 1GHz – 9GHz

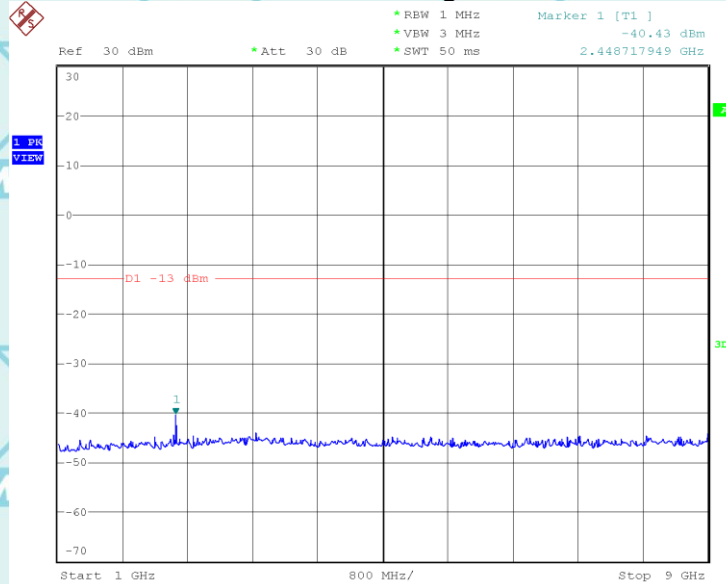

Date: 10.OCT.2024 19:16:49


### Conducted Emission Transmitting Mode CH 190 30MHz – 1GHz

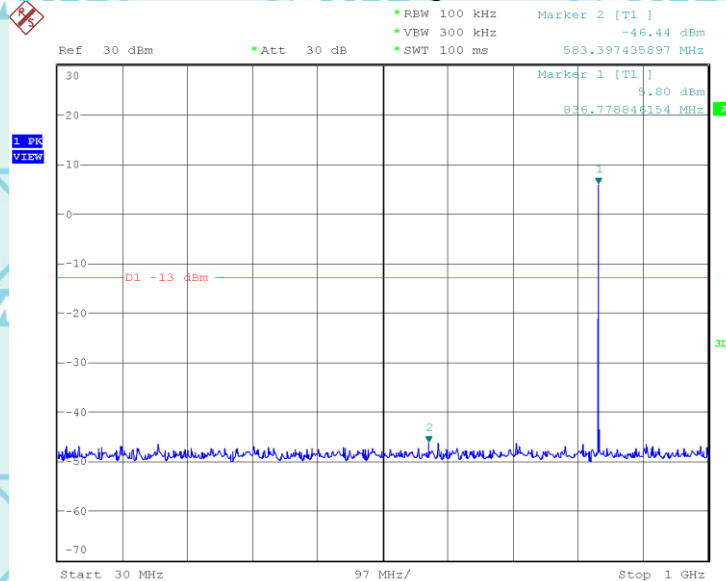

Date: 10.OCT.2024 19:20:24


Report No.: WSCT-ANAB-R&E240900047A-RF

## Conducted Emission Transmitting Mode CH 190 1GHz – 9GHz

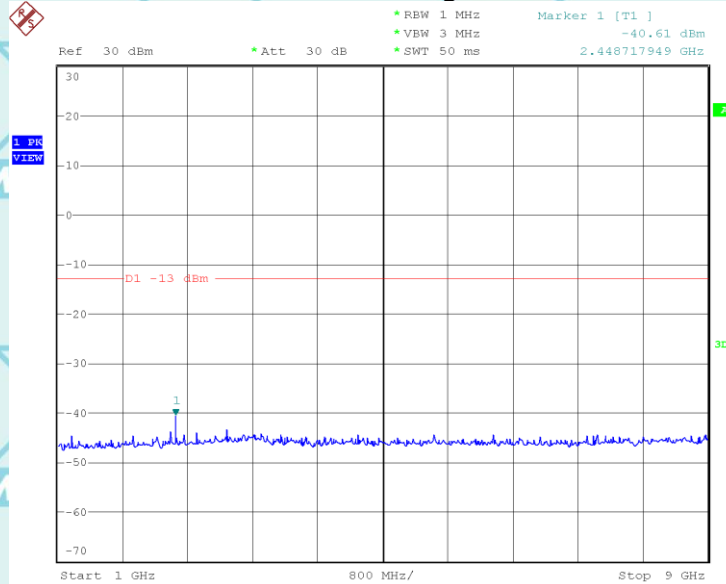

Date: 10.OCT.2024 19:16:17

## Conducted Emission Transmitting Mode CH 251 30MHz – 1GHz

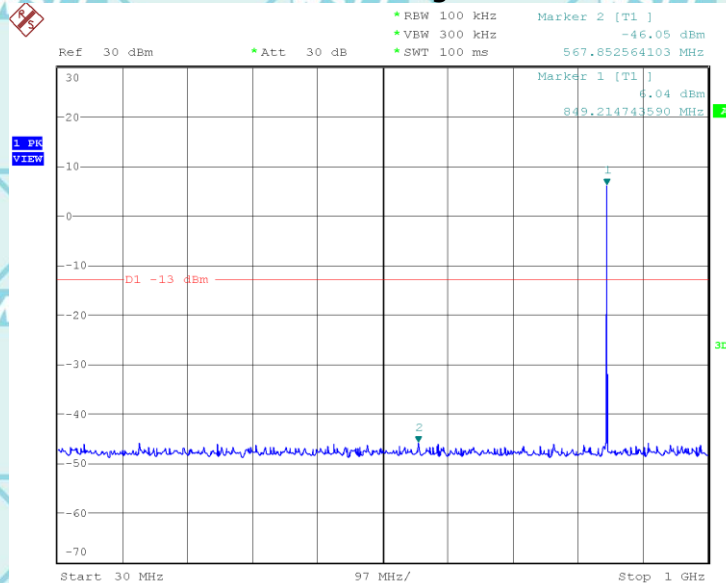


Date: 10.OCT.2024 19:21:22




Report No.: WSCT-ANAB-R&E240900047A-RF

## Conducted Emission Transmitting Mode CH 251 1GHz – 9GHz

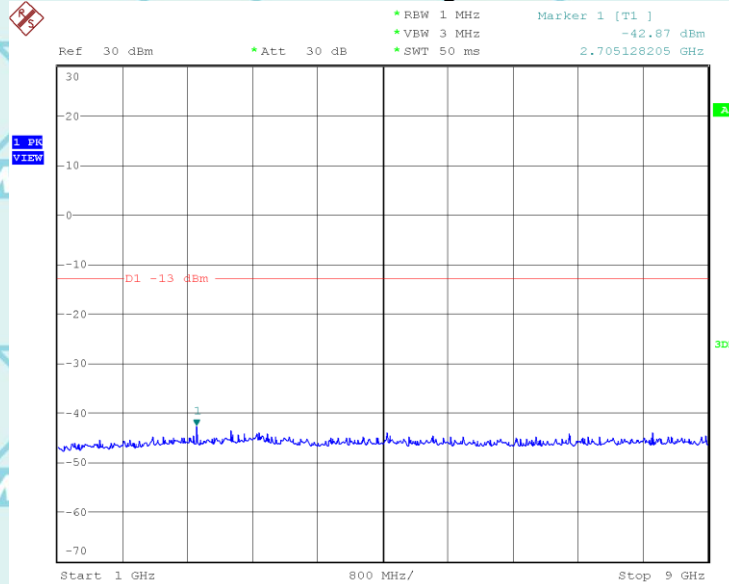

Date: 10.OCT.2024 19:15:40


## CONDUCTED EMISSION IN PCS1900 BAND Conducted Emission Transmitting Mode CH 512 30MHz – 1GHz

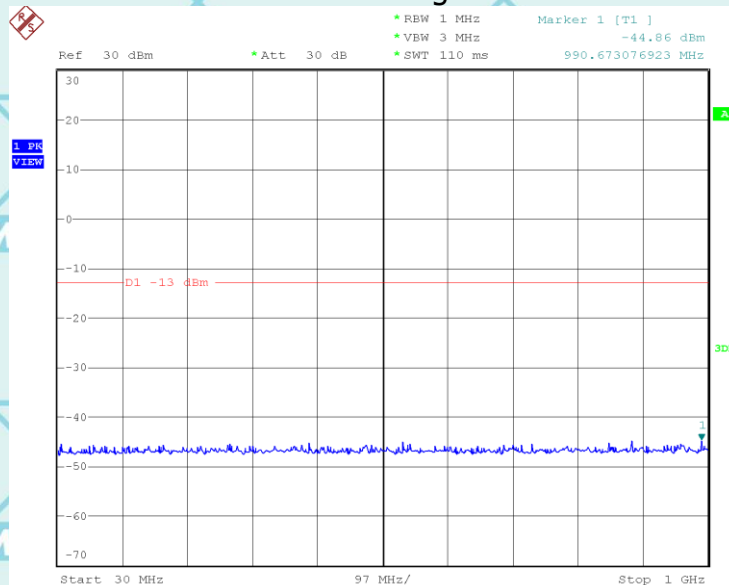

Date: 10.OCT.2024 20:10:35


Report No.: WSCT-ANAB-R&E240900047A-RF

## Conducted Emission Transmitting Mode CH 512 1GHz – 20GHz

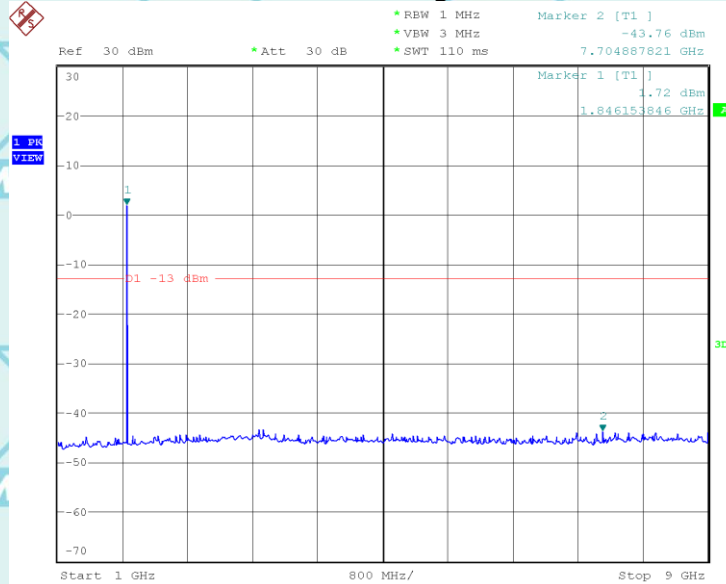

Date: 10.OCT.2024 20:03:04

## Conducted Emission Transmitting Mode CH 661 30MHz – 1GHz

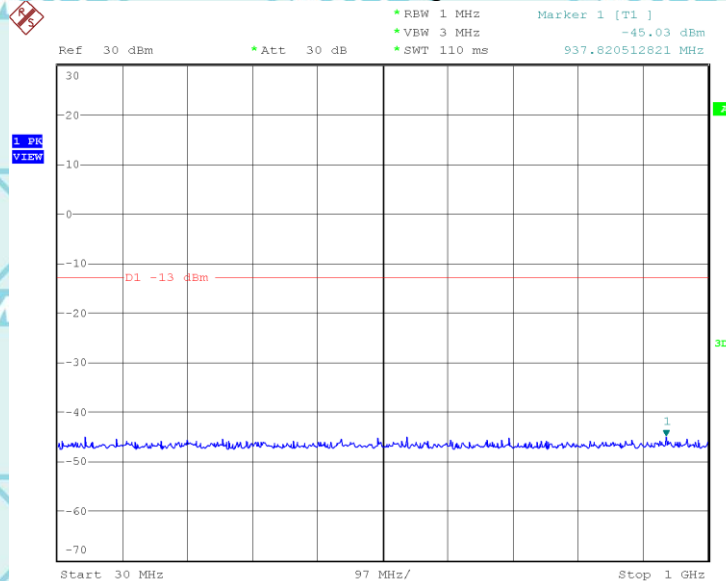


Date: 10.OCT.2024 20:10:01




Report No.: WSCT-ANAB-R&E240900047A-RF

## Conducted Emission Transmitting Mode CH 661 1GHz – 20GHz

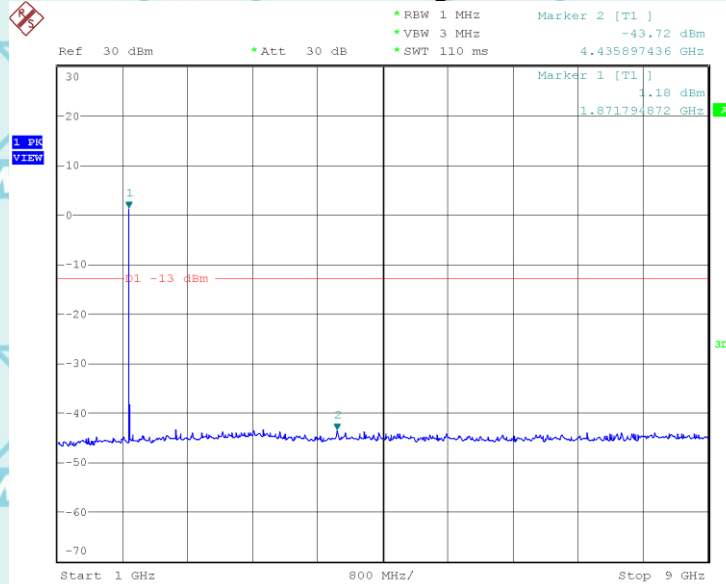

Date: 10.OCT.2024 20:05:54


## Conducted Emission Transmitting Mode CH 810 30MHz – 1GHz

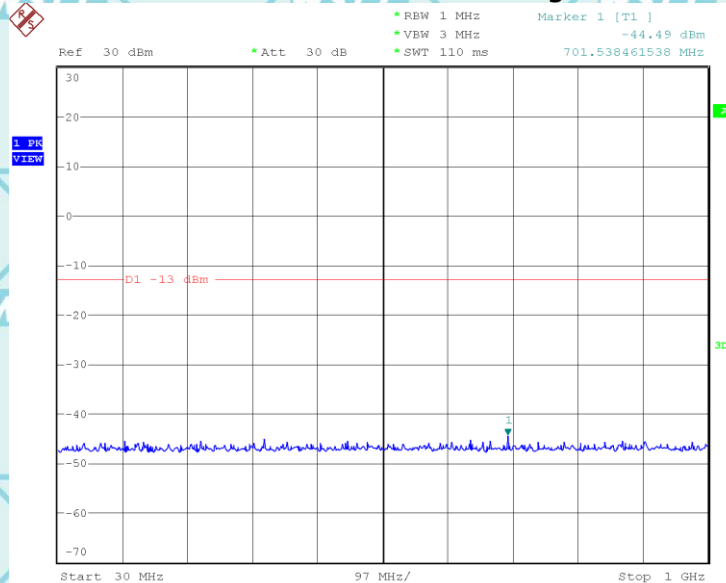

Date: 10.OCT.2024 20:09:28


Report No.: WSCT-ANAB-R&E240900047A-RF

## Conducted Emission Transmitting Mode CH 810 1GHz – 20GHz

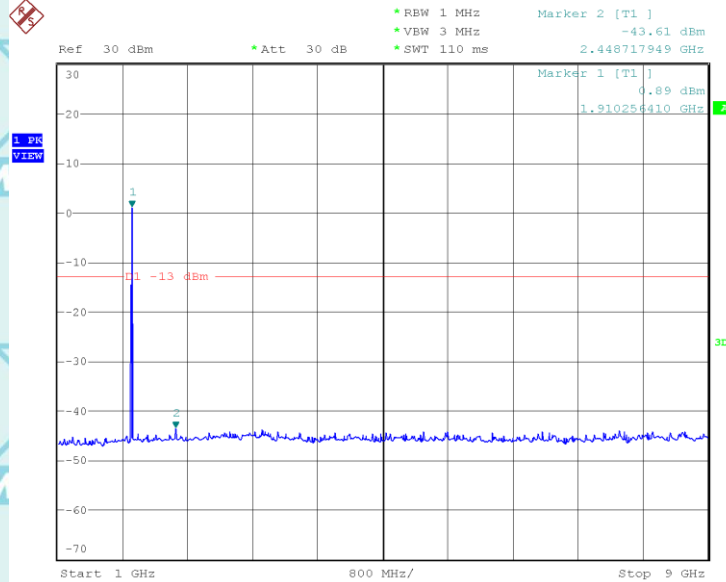

Date: 10.OCT.2024 20:08:40

## CONDUCTED EMISSION IN WCDMA Band 2 Conducted Emission Transmitting Mode CH 9262 30MHz – 1GHz

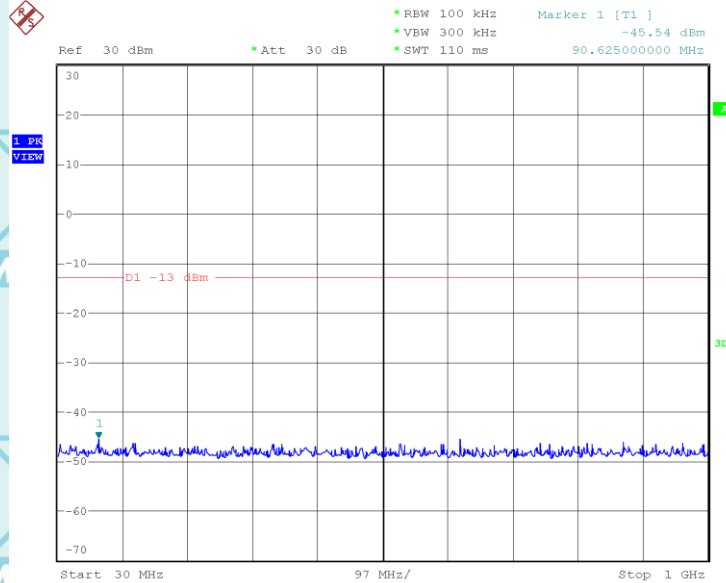


Date: 10.OCT.2024 21:00:16




Report No.: WSCT-ANAB-R&E240900047A-RF

## Conducted Emission Transmitting Mode CH 9262 1GHz – 20GHz

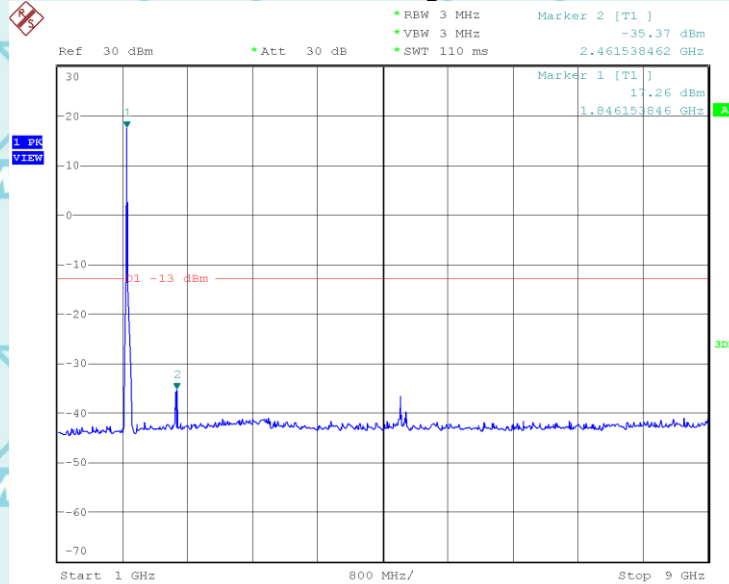

Date: 10.OCT.2024 21:01:38


## Conducted Emission Transmitting Mode CH 9400 30MHz – 1GHz

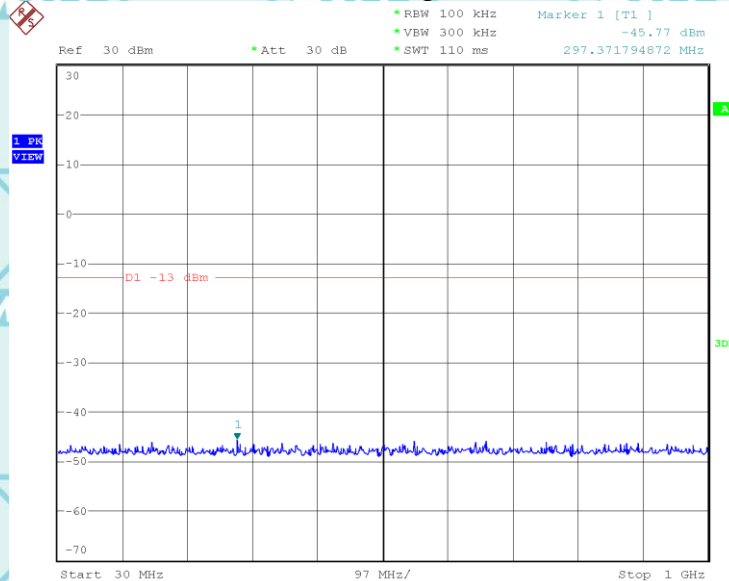

Date: 10.OCT.2024 20:59:40


Report No.: WSCT-ANAB-R&E240900047A-RF

## Conducted Emission Transmitting Mode CH 9400 1GHz – 20GHz

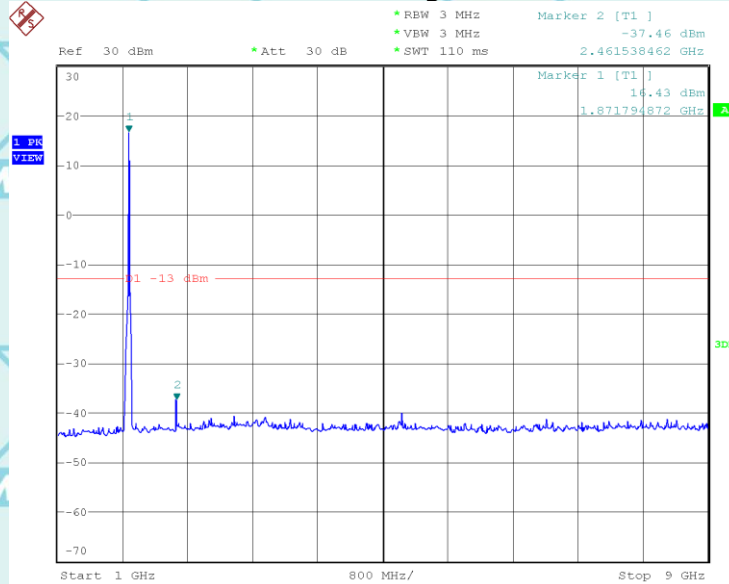

Date: 10.OCT.2024 21:02:17

## Conducted Emission Transmitting Mode CH 9538 30MHz – 1GHz

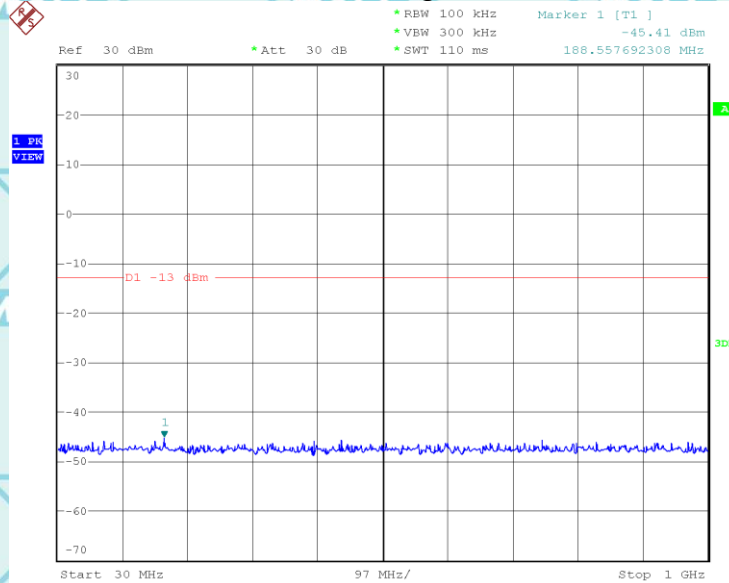


Date: 10.OCT.2024 20:58:46




Report No.: WSCT-ANAB-R&E240900047A-RF

## Conducted Emission Transmitting Mode CH 9538 1GHz – 20GHz

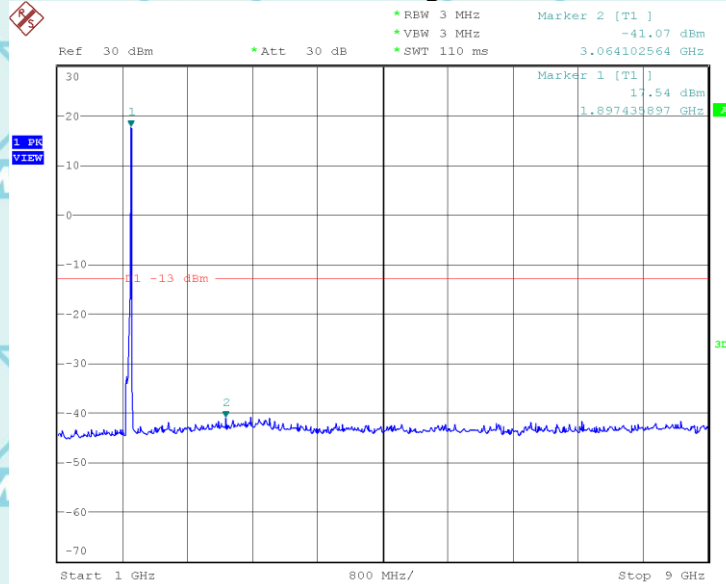

Date: 10.OCT.2024 21:02:48


## CONDUCTED EMISSION IN WCDMA Band 4 Conducted Emission Transmitting Mode CH 1312 30MHz – 1GHz

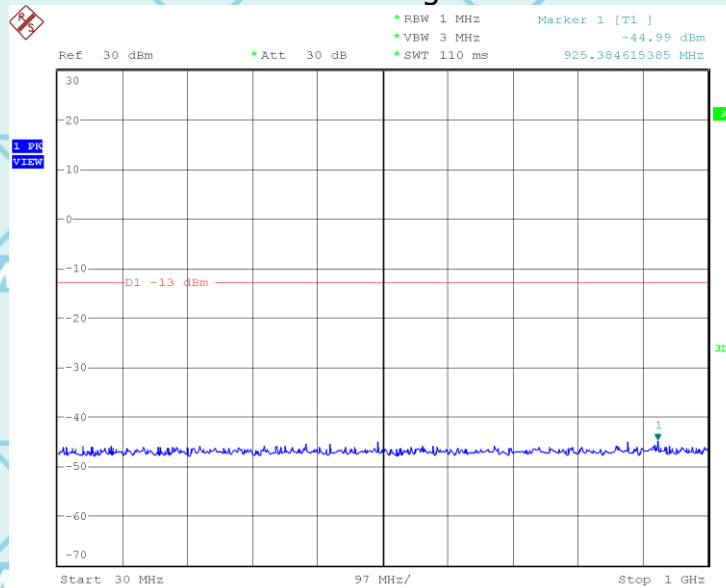

Date: 10.OCT.2024 21:12:28


Report No.: WSCT-ANAB-R&E240900047A-RF

## Conducted Emission Transmitting Mode CH 1312 1GHz – 20GHz

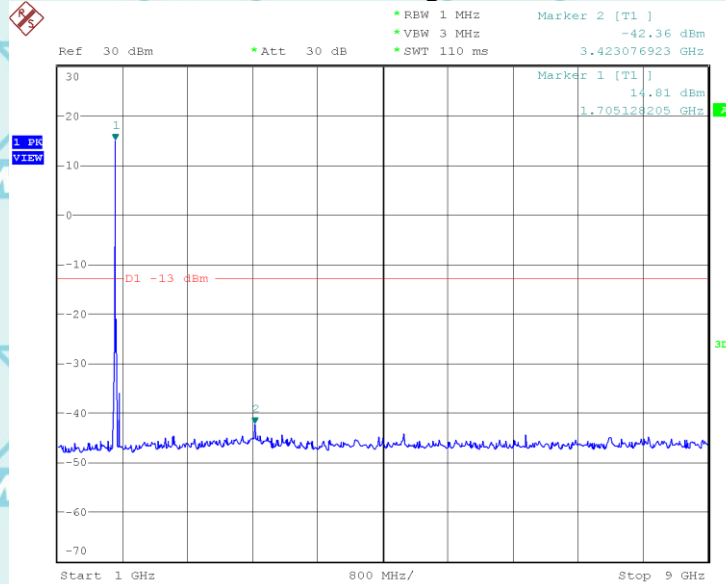

Date: 10.OCT.2024 21:13:16

## Conducted Emission Transmitting Mode CH 1413 30MHz – 1GHz

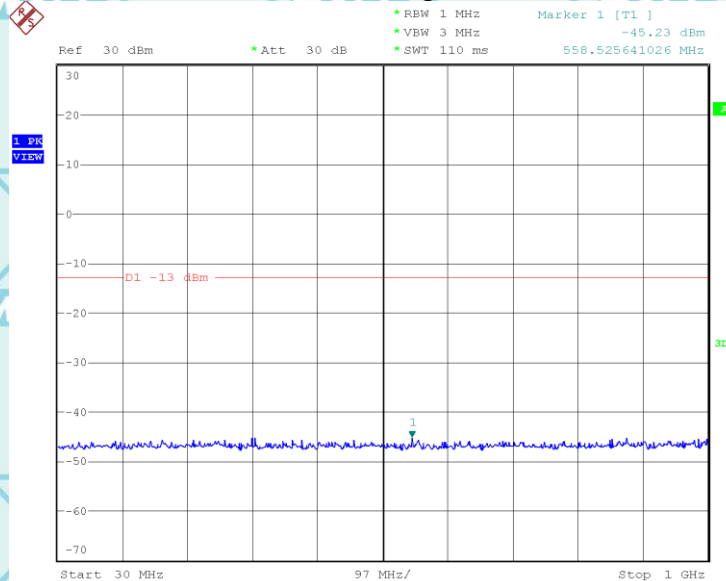


Date: 10.OCT.2024 21:12:03




Report No.: WSCT-ANAB-R&E240900047A-RF

## Conducted Emission Transmitting Mode CH 1413 1GHz – 20GHz

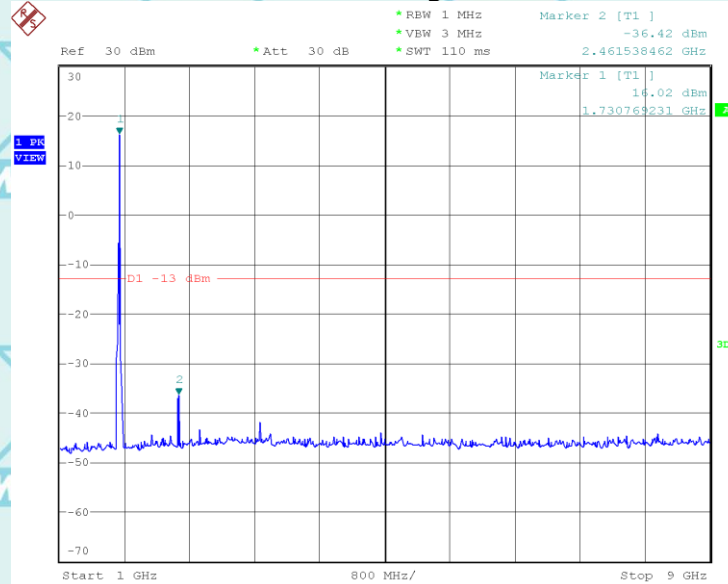

Date: 10.OCT.2024 21:14:00


## Conducted Emission Transmitting Mode CH 1513 30MHz – 1GHz

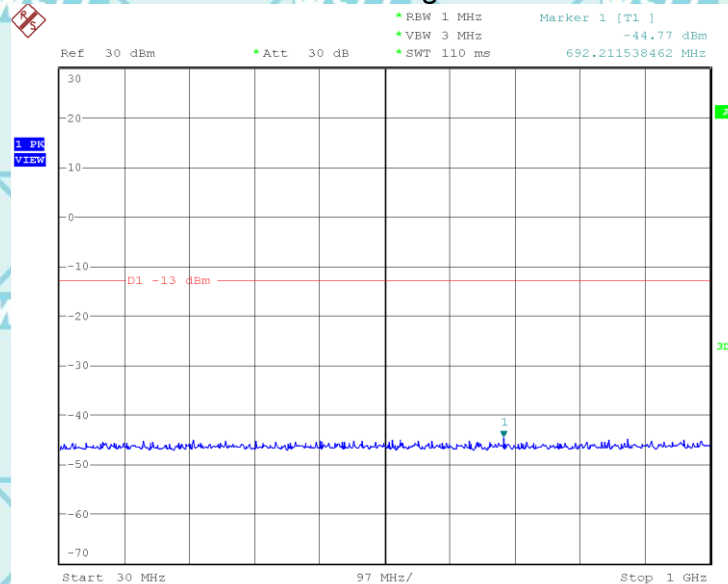

Date: 10.OCT.2024 21:11:30


Report No.: WSCT-ANAB-R&E240900047A-RF

## Conducted Emission Transmitting Mode CH 1513 1GHz – 20GHz

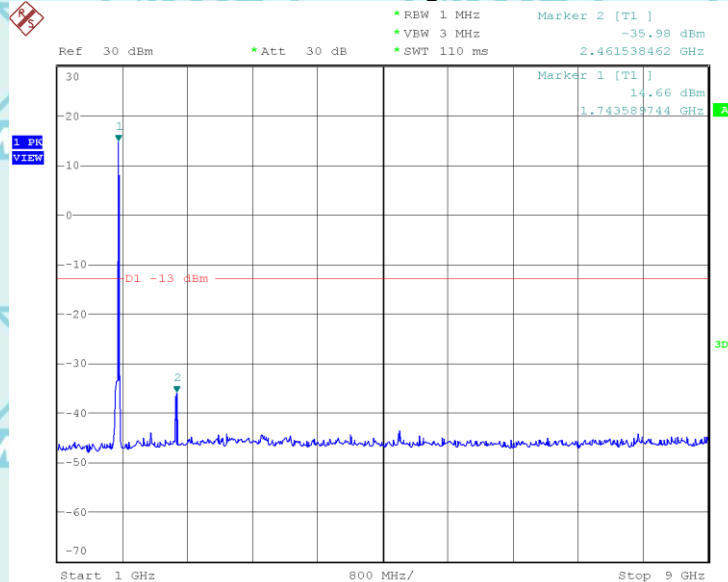

Date: 10.OCT.2024 21:14:42

## CONDUCTED EMISSION IN WCDMA Band 5 Conducted Emission Transmitting Mode CH 4132 30MHz – 1GHz

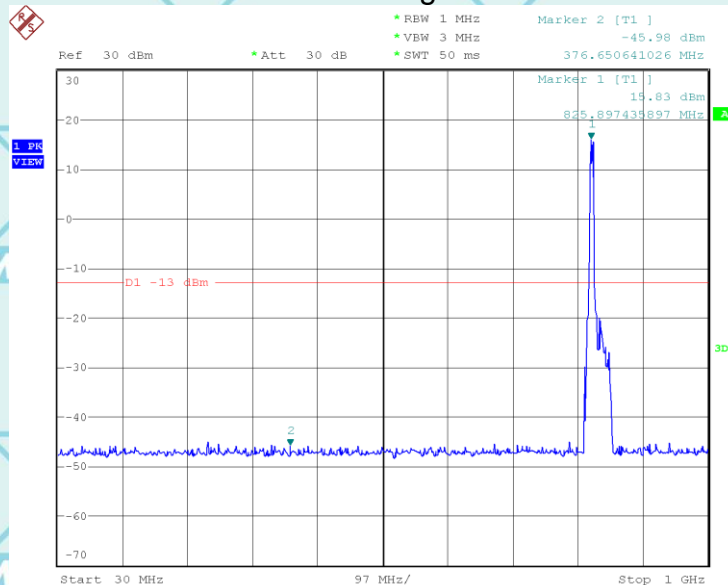


Date: 10.OCT.2024 21:34:44




Report No.: WSCT-ANAB-R&E240900047A-RF

### Conducted Emission Transmitting Mode CH 4132 1GHz – 9GHz

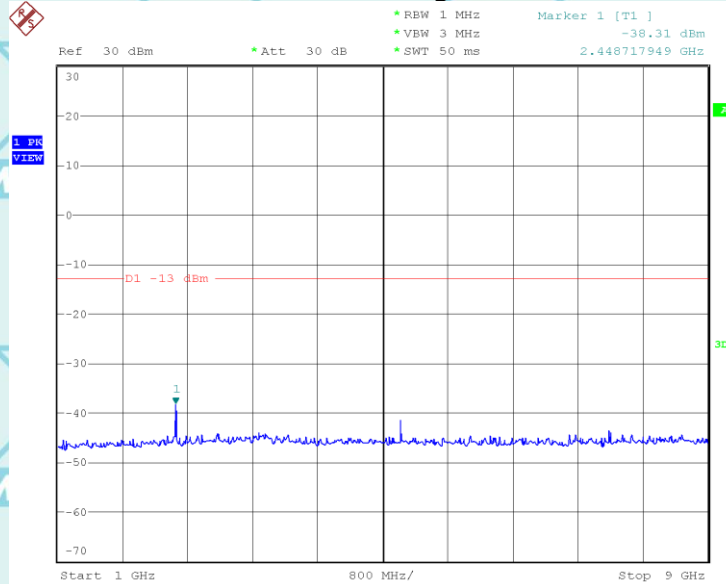

Date: 10.OCT.2024 21:29:39


### Conducted Emission Transmitting Mode CH 4182 30MHz – 1GHz

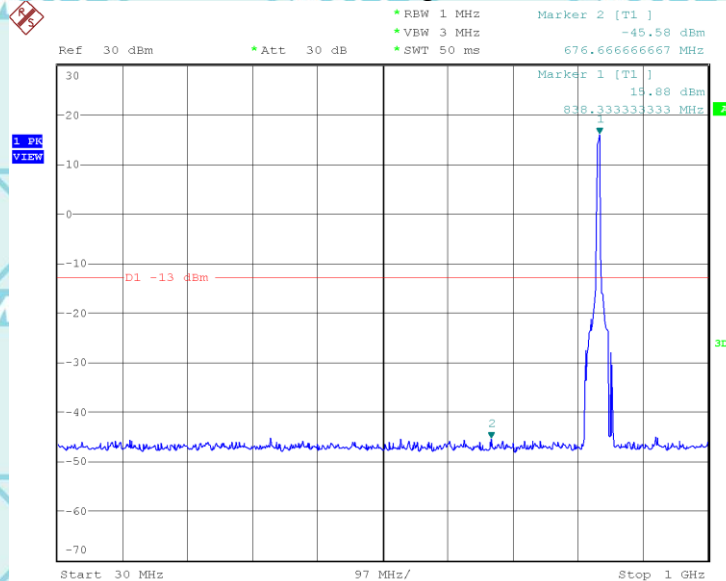

Date: 10.OCT.2024 21:35:19


Report No.: WSCT-ANAB-R&E240900047A-RF

### Conducted Emission Transmitting Mode CH 4182 1GHz – 9GHz

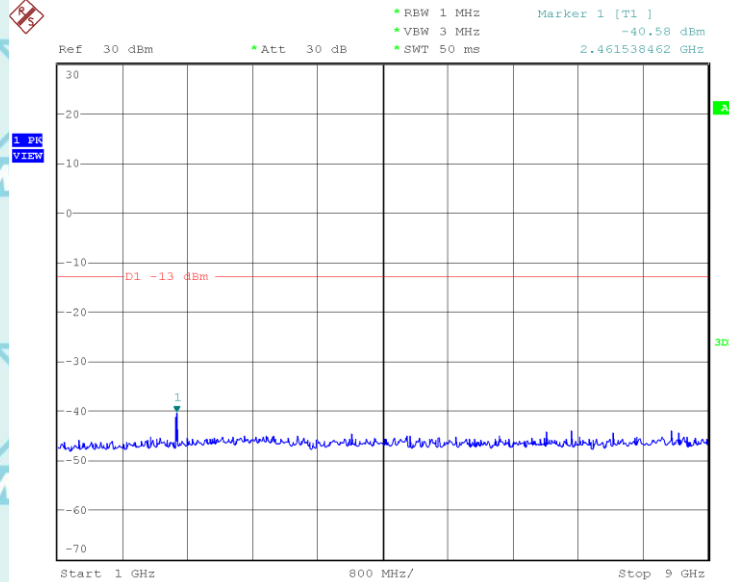

Date: 10.OCT.2024 21:30:23

### Conducted Emission Transmitting Mode CH 4233 30MHz – 1GHz

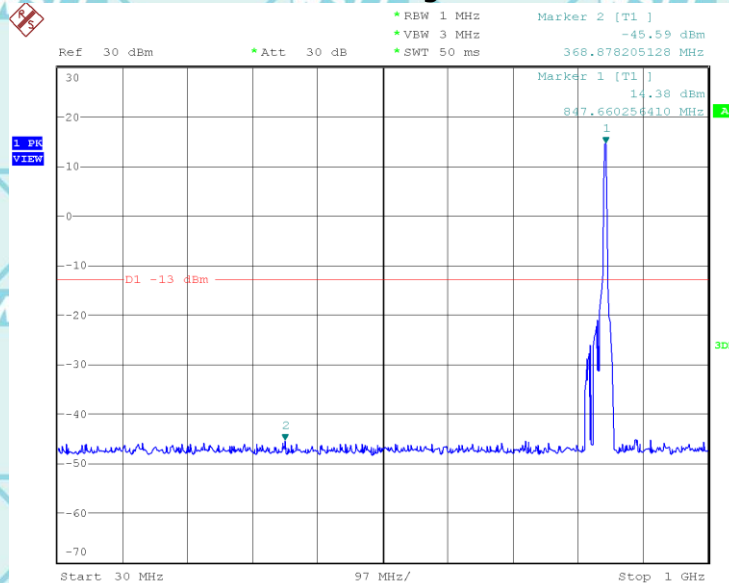


Date: 10.OCT.2024 21:33:40



Report No.: WSCT-ANAB-R&E240900047A-RF

## Conducted Emission Transmitting Mode CH 4233 1GHz – 9GHz

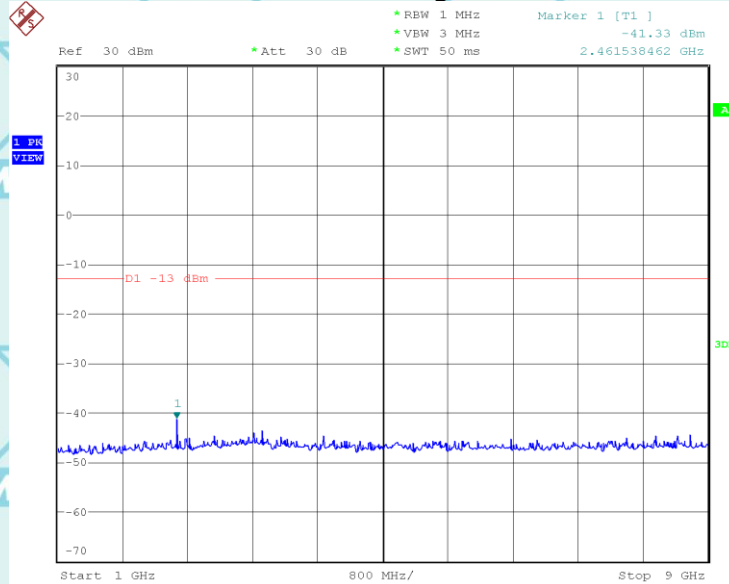

Date: 10.OCT.2024 21:32:44

*Note: Please refer to Annex (LTE Out-of-band emissions) for more test data*

Report No.: WSCT-ANAB-R&amp;E240900047A-RF

## 12. FREQUENCY STABILITY


### Test limit:

The frequency stability of the transmitter shall be measured while varying the ambient temperatures and supply voltages over the ranges specified in §2.1055. The specific frequency stability limits are provided in the relevant rules section(s). see section 4.

### Test procedure:

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

### Test setup:

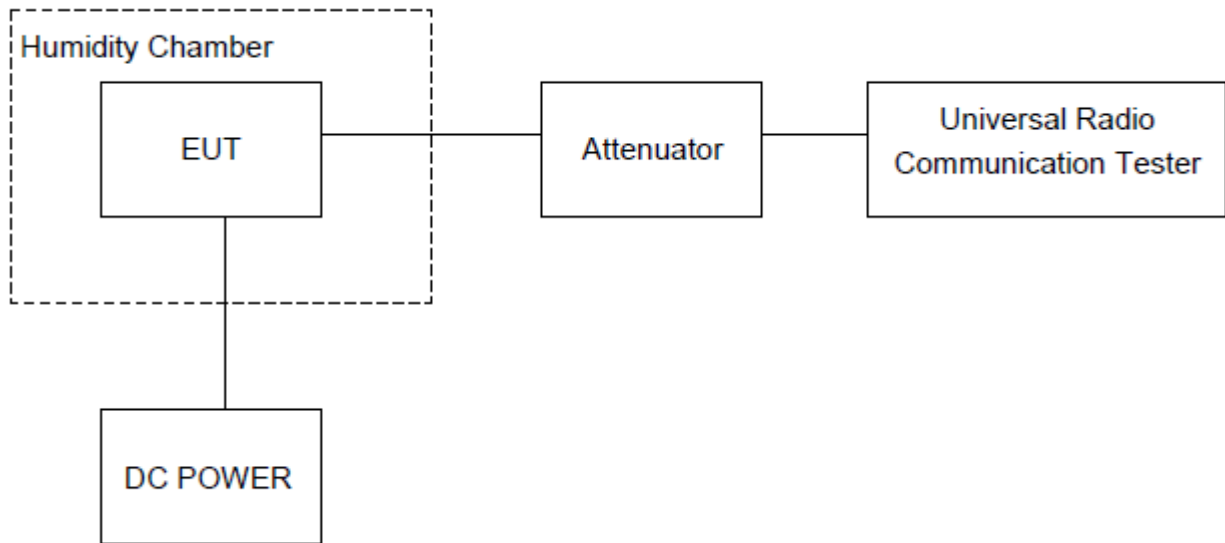



Report No.: WSCT-ANAB-R&amp;E240900047A-RF

## 12.1. Measurement Result (Worst)

**Frequency Error against Voltage for GSM 850 band (836.6MHz)**

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	45	0.053
3.80	39	0.047
4.45	35	0.042

**Frequency Error against Temperature for GSM 850 band (836.6MHz)**

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	36	0.043
0	35	0.042
10	45	0.053
20	38	0.045
30	40	0.048
40	37	0.044
60	40	0.048

**Frequency Error against Voltage for PCS 1900 band (1880MHz)**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	42	0.022
3.80	43	0.023
4.45	39	0.021

**Frequency Error against Temperature for PCS 1900 band (1880MHz)**

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	37	0.020
0	39	0.021
10	37	0.020
20	41	0.022
30	38	0.020
40	43	0.023
60	42	0.022



Report No.: WSCT-ANAB-R&amp;E240900047A-RF

### Frequency Error against Voltage for GPRS 850 band (836.6MHz)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	35	0.041
3.80	39	0.046
4.45	40	0.047

### Frequency Error against Temperature for GPRS 850 band (836.6MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	38	0.046
0	35	0.041
10	45	0.054
20	41	0.049
30	39	0.046
40	39	0.046
60	32	0.039

### Frequency Error against Voltage for GPRS 1900 band (1880MHz)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	41	0.022
3.80	37	0.020
4.45	33	0.018

### Frequency Error against Temperature for GPRS 1900 band (1880MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	41	0.022
0	41	0.022
10	43	0.023
20	34	0.019
30	42	0.023
40	41	0.022
60	37	0.020



Report No.: WSCT-ANAB-R&amp;E240900047A-RF

### Frequency Error against Voltage for EGPRS 850 band (836.6MHz)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	41	0.049
3.80	40	0.048
4.45	40	0.048

### Frequency Error against Temperature for EGPRS 850 band (836.6MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	39	0.047
0	43	0.051
10	40	0.048
20	38	0.046
30	43	0.051
40	44	0.052
60	39	0.047

### Frequency Error against Voltage for EGPRS 1900 band (1880MHz)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	37	0.020
3.80	36	0.019
4.45	41	0.022

### Frequency Error against Temperature for EGPRS 1900 band (1880MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	33	0.018
0	44	0.023
10	45	0.024
20	41	0.022
30	43	0.023
40	35	0.018
60	35	0.018



Report No.: WSCT-ANAB-R&amp;E240900047A-RF

## UTRA BANDS

### Frequency Error against Voltage for WCDMA Band 2 (1880MHz)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	37	0.020
3.80	41	0.022
4.45	36	0.019

### Frequency Error against Temperature for WCDMA Band 2 (1880MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	37	0.020
0	38	0.020
10	40	0.021
20	43	0.023
30	37	0.020
40	45	0.024
60	43	0.023

### Frequency Error against Voltage for WCDMA Band 4 (1732.6MHz)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	38	0.022
3.80	34	0.019
4.45	38	0.022

### Frequency Error against Temperature for WCDMA Band 4 (1732.6MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	37	0.021
0	40	0.023
10	43	0.025
20	38	0.022
30	38	0.022
40	42	0.024
60	40	0.023



Report No.: WSCT-ANAB-R&amp;E240900047A-RF

### Frequency Error against Voltage for WCDMA Band 5 (836.4MHz)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	36	0.043
3.80	45	0.053
4.45	37	0.044

### Frequency Error against Temperature for WCDMA Band 5 (836.4MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	41	0.049
0	35	0.042
10	33	0.039
20	38	0.046
30	39	0.046
40	35	0.042
60	40	0.048

Note: Please refer to Annex (LTE Frequency Error against ) for more test data



Report No.: WSCT-ANAB-R&amp;E240900047A-RF

### 13. Test Setup Photographs

Please refer to Annex "Set Up Photos-RF" for test setup photos

---END OF REPORT---