


# ENGINEERING TEST REPORT



**NBS55XX**  
**Model No.: NBS55XXTXXX**  
**FCC ID: O3JNBS55XXT**

*Applicant:*

**NBS Technologies Inc.**  
703 Evans Avenue, Suite 500  
Toronto, ON  
Canada, M9C 5E9

*Tested in Accordance With*

**Federal Communications Commission (FCC)**  
**47 CFR, PARTS 2, 22 (Subpart H) and 24 (Subpart E)**

**UltraTech's File No.: MIS-038FCC22-24**

This Test report is Issued under the Authority of  
Tri M. Luu, Professional Engineer,  
Vice President of Engineering  
UltraTech Group of Labs

Date: April 11, 2005



Report Prepared by: Anca Dobre

Tested by: Hung Trinh, RFI/EMI Technician

Issued Date: April 11, 2005

Test Dates: March 22 – March 28, 2005

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
- This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Tel.: (905) 829-1570 Fax.: (905) 829-8050  
Website: [www.ultratech-labs.com](http://www.ultratech-labs.com), Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri@ultratech-labs.com](mailto:tri@ultratech-labs.com)

**FC**  
31040/SIT

**VEI**  
C-1376

**Canada**  
46390-2049

**NVLAP**  
200093-0

**BSMI**  
SL2-IN-E-1119R

**IT**  
00-034



## TABLE OF CONTENTS

|                   |  |           |
|-------------------|--|-----------|
| <b>EXHIBIT 1.</b> | <b>SUBMITTAL CHECK LIST.....</b>   | <b>1</b>  |
| <b>EXHIBIT 2.</b> | <b>INTRODUCTION .....</b>  | <b>2</b>  |
| 2.1.              | SCOPE.....   | 2         |
| 2.2.              | RELATED SUBMITTAL(S)/GRANT(S).....   | 2         |
| 2.3.              | NORMATIVE REFERENCES .....   | 2         |
| <b>EXHIBIT 3.</b> | <b>PERFORMANCE ASSESSMENT .....</b>  | <b>3</b>  |
| 3.1.              | CLIENT INFORMATION .....   | 3         |
| 3.2.              | EQUIPMENT UNDER TEST (EUT) INFORMATION .....                                       | 3         |
| 3.3.              | EUT'S TECHNICAL SPECIFICATIONS.....  | 4         |
| 3.4.              | LIST OF EUT'S PORTS .....  | 4         |
| 3.5.              | ANCILLARY EQUIPMENT .....  | 4         |
| <b>EXHIBIT 4.</b> | <b>EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....</b>               | <b>5</b>  |
| 4.1.              | CLIMATE TEST CONDITIONS.....   | 5         |
| 4.2.              | OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS .....                   | 5         |
| <b>EXHIBIT 5.</b> | <b>SUMMARY OF TEST RESULTS.....</b>  | <b>6</b>  |
| 5.1.              | LOCATION OF TESTS .....  | 6         |
| 5.2.              | APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS .....                             | 6         |
| 5.3.              | MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES .....                | 6         |
| 5.4.              | DEVIATION OF STANDARD TEST PROCEDURES.....   | 6         |
| <b>EXHIBIT 6.</b> | <b>MEASUREMENTS, EXAMINATIONS &amp; TEST DATA FOR EMC EMISSIONS.....</b>           | <b>7</b>  |
| 6.1.              | TEST PROCEDURES.....   | 7         |
| 6.2.              | MEASUREMENT UNCERTAINTIES .....  | 7         |
| 6.3.              | MEASUREMENT EQUIPMENT USED.....  | 7         |
| 6.4.              | ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER.....                   | 7         |
| 6.5.              | RF POWER OUTPUT [§§ 2.1046 & 22.913 & 24.232] .....                                | 8         |
| 6.6.              | TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053, 22.917 & 24.238]..... | 10        |
| <b>EXHIBIT 7.</b> | <b>MEASUREMENT UNCERTAINTY.....</b>  | <b>14</b> |
| 7.1.              | RADIATED EMISSION MEASUREMENT UNCERTAINTY .....                                    | 14        |
| <b>EXHIBIT 8.</b> | <b>MEASUREMENT METHODS.....</b>  | <b>15</b> |
| 8.1.              | CONDUCTED POWER MEASUREMENTS .....   | 15        |
| 8.2.              | RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD .....           | 16        |

## EXHIBIT 1. SUBMITTAL CHECK LIST

| Annex No. | Exhibit Type            | Description of Contents  | Quality Check (OK) |
|-----------|-------------------------|--|--------------------|
| --        | Test Report             | <ul style="list-style-type: none"> <li>Exhibit 1: Submittal check lists</li> <li>Exhibit 2: Introduction</li> <li>Exhibit 3: Performance Assessment</li> <li>Exhibit 4: EUT Operation and Configuration during Tests</li> <li>Exhibit 5: Summary of test Results</li> <li>Exhibit 6: Measurement Data</li> <li>Exhibit 7: Measurement Uncertainty</li> <li>Exhibit 8: Measurement Methods</li> </ul> | OK                 |
| 1         | Test Setup Photos       | Radiated Emission Setup Photos   | OK                 |
| 2         | External Photos of EUT  | External EUT Photos  | OK                 |
| 3         | Internal Photos of EUT  | Internal EUT Photos  | OK                 |
| 4         | Cover Letters           | <ul style="list-style-type: none"> <li>Letter from Ultratech for Certification Request</li> <li>Letter from the Applicant to appoint Ultratech to act as an agent</li> <li>Letters from the Applicant to request for Confidentiality Filing</li> </ul>   | OK                 |
| 5         | Attestation Statements  | --   | --                 |
| 6         | ID Label/Location Info  | <ul style="list-style-type: none"> <li>ID Label</li> <li>Location of ID Label</li> </ul>   | OK                 |
| 7         | Block Diagrams          | <ul style="list-style-type: none"> <li>Block Diagram Wireless POS terminal</li> <li>Block Diagram Wavecom Radio Module</li> </ul>  | OK                 |
| 8         | Schematic Diagrams      | <ul style="list-style-type: none"> <li>Schematics Wireless POS terminal/Daughterboard</li> <li>Schematics Wavecom Radio Module</li> </ul>  | OK                 |
| 9         | Parts List/Tune Up Info | <ul style="list-style-type: none"> <li>Parts Lists Wireless POS terminal</li> <li>Parts Lists Wavecom Radio Module</li> </ul>  | OK                 |
| 10        | Operational Description | <ul style="list-style-type: none"> <li>NBS 5500 Terminal/Product Specification</li> </ul>  | OK                 |
| 11        | RF Exposure Info        | SAR Test Report  | OK                 |
| 12        | Users Manual            | <ul style="list-style-type: none"> <li>Installation and Operation Manual</li> <li>User Manual Wavecom Radio Module</li> </ul>  | OK                 |

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MIS-028FCC22-24  
April 11, 2005

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

## EXHIBIT 2. INTRODUCTION

### 2.1. SCOPE

|                         |  |
|-------------------------|--|
| <b>Reference:</b>       | FCC Parts 2, 22 and 24   |
| <b>Title:</b>           | Telecommunication – 47 Code of Federal Regulations (CFR), Parts 2, 22 & 24   |
| <b>Purpose of Test:</b> | To gain FCC Certification Authorization for Radio operating in the frequency bands 824.7 – 848.31 MHz and 1851.25 – 1908.75 MHz.   |
| <b>Test Procedures:</b> | Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. |

### 2.2. RELATED SUBMITTAL(S)/GRANT(S)

None.

### 2.3. NORMATIVE REFERENCES

| Publication                | Year         | Title   |
|----------------------------|--------------|---|
| FCC CFR Parts 0-19, 80-End | 2005         | Code of Federal Regulations – Telecommunication   |
| ANSI C63.4                 | 2004         | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| CISPR 22 & EN 55022        | 2003<br>2003 | Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment   |
| CISPR 16-1                 | 2003         | Specification for Radio Disturbance and Immunity measuring apparatus and methods  |

## EXHIBIT 3. PERFORMANCE ASSESSMENT

### 3.1. CLIENT INFORMATION

| APPLICANT              |  |
|------------------------|--|
| <b>Name:</b>           | NBS Technologies Inc.  |
| <b>Address:</b>        | 703 Evans Avenue, Suite 500<br>Toronto, ON<br>Canada, M9C 5E9  |
| <b>Contact Person:</b> | Mr. Alexander Umanets<br>Phone #: 416-621-1911<br>Fax #: 416-621-8875<br>Email Address: aumanets@nbstech.com |

| MANUFACTURER           |   |
|------------------------|---|
| <b>Name:</b>           | SAGEM Monotel   |
| <b>Address:</b>        | 1, Rue Claude Chappe – BP346<br>07503 Guilhaumand-Granges<br>France   |
| <b>Contact Person:</b> | Mr. Clement Lormeau<br>Phone #: +33 4 75 81 40 47<br>Fax #: +33 4 75 81 41 57<br>Email Address: clement.lormeau@sagem.com |

### 3.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

|   |  |
|---|--|
| <b>Brand Name:</b>                          | NBS  |
| <b>Product Name:</b>                        | NBS55XX  |
| <b>Model Name or Number:</b>                | NBS55XTXXX   |
| <b>Serial Number:</b>                       | Preproduction  |
| <b>Type of Equipment:</b>                   | Non-broadcast Radio Communication Equipment                              |
| <b>External Power Supply:</b>               | N/A  |
| <b>Transmitting/Receiving Antenna Type:</b> | Integral   |
| <b>Primary User Functions of EUT:</b>       | Wireless point-of-sale (POS) terminal to provide processing of payments. |

### 3.3. EUT'S TECHNICAL SPECIFICATIONS

| TRANSMITTER                     |   |
|---------------------------------|---|
| Equipment Type:                 | Portable  |
| Intended Operating Environment: | Commercial, industrial or business environment  |
| Power Supply Requirement:       | 3.6 V Ni-MH battery   |
| RF Output Power Rating:         | CDMA : 0.224 W<br>PCS CDMA: 0.224 W   |
| Operating Frequency Range:      | <ul style="list-style-type: none"><li>824.7 – 848.31 MHz (CDMA)</li><li>1851.25 – 1908.75 MHz (PCS CDMA)</li></ul>  |
| RF Output Impedance:            | 50 Ohms   |
| Emission Designation*:          | 1M25F9W   |
| Antenna Connector Type:         | Ultra-Miniature SMT GSC   |
| Antenna Description:            | Manufacturer: SAGEM Monetel<br>Type: Integrated Antenna<br>Model: CDMA X930<br>Frequency Range: Tx: 824 – 849 MHz / 1850 – 1910 MHz<br>Rx: 869 – 894 MHz / 1930 – 1990 MHz<br>Gain: -3.75 dBi (CDMA)<br>-0.5 dBi (PCS CDMA) |

\* Per 47 CFR § 2.201 and §2.202

### 3.4. LIST OF EUT'S PORTS

| Port Number | EUT's Port Description | Number of Identical Ports | Connector Type  | Cable Type (Shielded/Non-shielded) |
|-------------|------------------------|---------------------------|-----------------|------------------------------------|
| 1           | Mini-USB Main          | 1                         | Mini-USB type A | Shielded                           |
| 2           | Mini-USB Slave         | 1                         | Mini-USB type B | Shielded                           |
| 3           | IR                     | 1                         | Optical         | No cable                           |

### 3.5. ANCILLARY EQUIPMENT

None.

## EXHIBIT 4. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

### 4.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

|                     |                     |
|---------------------|---------------------|
| Temperature:        | 21°C                |
| Humidity:           | 51%                 |
| Pressure:           | 102 kPa             |
| Power input source: | 3.6 V Ni-MH battery |

### 4.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

|                                  |  |
|----------------------------------|--|
| <b>Operating Modes:</b>          | The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data. |
| <b>Special Test Software:</b>    | None.  |
| <b>Special Hardware Used:</b>    | None.  |
| <b>Transmitter Test Antenna:</b> | The EUT is tested with the antenna fitted in a manner typical of normal intended use.                                    |

| Transmitter Test Signals  |  |
|---|--|
| <b>Frequency Band(s):</b>   | <ul style="list-style-type: none"><li>824.7 – 848.31 MHz (CDMA)</li><li>1851.25 – 1908.75 MHz (PCS CDMA)</li></ul>   |
| <b>Frequency(ies) Tested:</b><br>(Near lowest, near middle & near highest frequencies in the frequency range of operation.) | <ul style="list-style-type: none"><li>824.7 MHz (channel # 1013)</li><li>831.52 MHz (channel # 0384)</li><li>848.31 MHz (channel # 0777)</li><li>1851.25 MHz (channel # 0025)</li><li>1880.0 MHz (channel # 0600)</li><li>1908.75 MHz (channel # 1175)</li></ul> |
| <b>RF Power Output (measured maximum output power):</b>   | CDMA: 0.234 W (Peak Conducted Power)<br>PCS CDMA: 0.219 W (Peak Conducted Power)   |
| <b>Normal Test Modulation:</b>  | CDMA   |
| <b>Modulating Signal Source:</b>  | Internal   |

## EXHIBIT 5. SUMMARY OF TEST RESULTS

### 5.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 24'(L) by 16'(W) by 8'(H).
- Radiated Emissions were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario.

The above sites have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: January 10, 2005.

### 5.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS

| FCC Section(s)  | Test Requirements                      | Applicability (Yes/No)          |
|---|--|---------------------------------|
| 1.1307, 1.1310, 2.1091 & 2.1093   | RF Exposure Limit                      | See Ultratech SAR Test Report   |
| 2.1046, 22.913 & 24.232   | RF Power Output                        | Yes                             |
| 2.1047(a)   | Audio Frequency Response               | See original filing test report |
| 2.1047(b)   | Modulation Limiting                    | See original filing test report |
| 2.1049  | Emission Limitation & Emission Mask    | See original filing test report |
| 2.1051, 2.1057, 22.917 & 24.238   | Spurious emissions at antenna terminal | See original filing test report |
| 2.1053, 2.1057, 22.917 & 24.238   | Field strength of spurious radiation   | Yes                             |
| 2.1055  | Frequency Stability                    | See original filing test report |
| <b>Wireless CDMA POS Terminal</b> , by <b>NBS Technologies Inc.</b> , has also been tested and found to comply with FCC Part 15, Subpart B – Class A Digital Devices. |  |                                 |

### 5.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

### 5.4. DEVIATION OF STANDARD TEST PROCEDURES

None.

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MIS-028FCC22-24  
April 11, 2005

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*



## **EXHIBIT 6. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS**

### **6.1. TEST PROCEDURES**

Please refer to Ultratech Test Procedures, File # ULTR P001-2004, ANSI C63.4, and Exhibit 8 of this test report.

### **6.2. MEASUREMENT UNCERTAINTIES**

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

### **6.3. MEASUREMENT EQUIPMENT USED**

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1.

### **6.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER**

The essential function of the EUT is to correctly communicate data to and from radios over RF link.

## 6.5. RF POWER OUTPUT [§§ 2.1046 & 22.913 & 24.232]

### 6.5.1. Limits

§22.913 (a) The Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

§ 24.232 (b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

### 6.5.2. Method of Measurements

Refer to ULTRATECH Test Procedures, File # ULTR P001-2004, ANSI C63.4 and Exhibit 8, section 8.1 (Conducted) and 8.2 (Radiated) of this report for measurement details.

### 6.5.3. Test Equipment List

| Test Instruments                   | Manufacturer    | Model No. | Serial No. | Frequency Range  |
|------------------------------------|-----------------|-----------|------------|------------------|
| Digital radiocommunications tester | Rohde & Schwarz | CMD80     | DE29573    | 9 kHz – 26.5 GHz |
| Attenuator                         | Weinschel Corp  | 46-20-34  | BM1347     | DC – 18 GHz      |

### 6.5.4. Test Data

#### CDMA

| Transmitter Channel Output | Fundamental Frequency (MHz) | Measured Peak Conducted Power (dBm) | *Calculated ERP (dBm) | ERP Limit |
|----------------------------|-----------------------------|-------------------------------------|-----------------------|-----------|
| Lowest                     | 824.70                      | 23.6                                | 17.7                  | 38.5      |
| Middle                     | 836.52                      | 23.7                                | 17.8                  | 38.5      |
| Highest                    | 848.31                      | 23.6                                | 17.7                  | 38.5      |

\*ERP = (peak conducted power in dBm) + (antenna gain in dBi) – 2.15

Sample calculation at 824.7 MHz: ERP = 23.6 dBm + (-3.75) – 2.15  
= 17.7 dBm

**PCS CDMA**

| Transmitter Channel Output | Fundamental Frequency (MHz) | Measured Peak Conducted Power (dBm) | *Calculated e.i.r.p. (dBm) | e.i.r.p. Limit |
|----------------------------|-----------------------------|-------------------------------------|----------------------------|----------------|
| Lowest                     | 1851.25                     | 23.4                                | 22.9                       | 33.0           |
| Middle                     | 1880.00                     | 23.3                                | 22.8                       | 33.0           |
| Highest                    | 1908.75                     | 23.3                                | 22.8                       | 33.0           |

\* e.i.r.p. = (peak conducted power in dBm) + (antenna gain in dBi)

Sample calculation at 1851.25 MHz: e.i.r.p. = 23.4 dBm + (-0.5) dBi  
= 22.9 dBm

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

**File #: MIS-028FCC22-24**

**April 11, 2005**

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

## 6.6. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053, 22.917 & 24.238]

### 6.6.1. Limits

§§22.917 (a) & 24.238 (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43+10\log(P)$  dB (P = transmitter conducted power in watts).

### 6.6.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in Exhibit 8, Section 8.2 of this report and its value in dBc is calculated as follows:

- (1) If the transmitter's antenna is an integral part of the EUT, the ERP is measured using substitution method.
- (2) If the transmitter's antenna is non-integral and diverse, the lowest ERP of the carrier with 0 dBi antenna gain is used for calculation of the spurious/harmonic emissions in dBc:  
Lowest ERP of the carrier = EIRP – 2.15 dB =  $P_c + G - 2.15$  dB = x dBm (conducted) + 0 dBi – 2.15 dB
- (3) Spurious /harmonic emissions levels expressed in dBc (dB below carrier) are as follows:

$$\text{ERP of spurious/harmonic (dBc)} = \text{ERP of carrier (dBm)} - \text{ERP of spurious/harmonic emission (dBm)}$$

### 6.6.3. Test Equipment List

| Test Instruments    | Manufacturer    | Model No.     | Serial No. | Frequency Range                    |
|---------------------|-----------------|---------------|------------|------------------------------------|
| Spectrum Analyzer   | Rhode & Schwarz | FSEK20/B4/B21 | 834157/005 | 9 kHz – 4 GHz                      |
| RF Amplifier        | Com-Power       | PA-102        |            | 1 MHz to 1 GHz, 30 dB gain nominal |
| Microwave Amplifier | Hewlett Packard | HP 83017A     | 3116A00661 | 1 GHz to 26.5 GHz                  |
| Biconilog Antenna   | EMCO            | 3142          | 10005      | 30 MHz to 2 GHz                    |
| Dipole Antenna      | EMCO            | 3121C         | 8907-434   | 30 GHz – 1 GHz                     |
| Dipole Antenna      | EMCO            | 3121C         | 8907-440   | 30 GHz – 1 GHz                     |
| Horn Antenna        | EMCO            | 3155          | 9701-5061  | 1 GHz – 18 GHz                     |
| Horn Antenna        | EMCO            | 3155          | 9911-5955  | 1 GHz – 18 GHz                     |
| RF Signal Generator | Hewlett Packard | HP 83752B     | 3610A00457 | 0.01 – 20 GHz                      |

#### 6.6.4. Test Data

##### 6.6.4.1. CDMA

Carrier Frequency (MHz): 824.7  
Power (dBm): 23.6  
Limit (dBc):  $-(43+10\log P_{\text{(in watts)}})$  -36.6  
Test Frequency Range (MHz): 30-9000

| Frequency (MHz)  | E-Field (dBμV/m) | EMI Detector (Peak/QP) | Antenna Polarization (H/V) | ERP measured by Substitution Method (dBm)   (dBc) |  | Limit (dBc) | Margin (dB) |
|--|------------------|------------------------|----------------------------|---|--|-------------|-------------|
| No spurious emissions were found. All harmonics emissions are more than 20 dB below the limit. |                  |                        |                            |   |  |             |             |

Carrier Frequency (MHz): 836.52  
Power (dBm): 23.7  
Limit (dBc):  $-(43+10\log P_{\text{(in watts)}})$  -36.7  
Test Frequency Range (MHz): 30-9000

| Frequency (MHz)  | E-Field (dBμV/m) | EMI Detector (Peak/QP) | Antenna Polarization (H/V) | ERP measured by Substitution Method (dBm)   (dBc) |  | Limit (dBc) | Margin (dB) |
|--|------------------|------------------------|----------------------------|---|--|-------------|-------------|
| No spurious emissions were found. All harmonics emissions are more than 20 dB below the limit. |                  |                        |                            |   |  |             |             |

Carrier Frequency (MHz): 848.31  
Power (dBm): 23.6  
Limit (dBc):  $-(43+10\log P_{\text{(in watts)}})$  -36.6  
Test Frequency Range (MHz): 30-9000

| Frequency<br>(MHz)  | E-Field<br>(dBμV/m) | EMI<br>Detector<br>(Peak/QP) | Antenna<br>Polarization<br>(H/V) | ERP measured by<br>Substitution Method |       | Limit<br>(dBc) | Margin<br>(dB) |
|---|---------------------|------------------------------|----------------------------------|--|-------|----------------|----------------|
|   |                     |                              |                                  | (dBm)                                  | (dBc) |                |                |
| All harmonics and spurious emissions are more than 20 dB below the limit. |                     |                              |                                  |  |       |                |                |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: http://www.ultratech-labs.com

File #: MIS-028FCC22-24  
April 11, 2005

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

#### 6.6.4.2. PCS CDMA

Carrier Frequency (MHz): 1851.25

Power (dBm): 23.4

Limit (dBc):  $-(43+10\log P_{\text{(in watts)}})$  -36.4

Test Frequency Range (MHz): 30-20000

| Frequency (MHz)  | E-Field (dB $\mu$ V/m) | EMI Detector (Peak/QP) | Antenna Polarization (H/V) | ERP measured by Substitution Method |        | Limit (dBc) | Margin (dB) |
|--|------------------------|------------------------|----------------------------|-------------------------------------|--------|-------------|-------------|
|  |                        |                        |                            | (dBm)                               | (dBc)  |             |             |
| 3702.50  | 61.41                  | Peak                   | V                          | -38.41                              | -61.81 | -36.4       | -25.41      |
| 3702.50  | 64.35                  | Peak                   | H                          | -35.50                              | -58.90 | -36.4       | -22.50      |
| 5553.75  | 55.79                  | Peak                   | V                          | -48.74                              | -72.14 | -36.4       | -35.74      |
| 5553.75  | 61.82                  | Peak                   | H                          | -40.12                              | -63.52 | -36.4       | -27.12      |
| No spurious emissions were found. All harmonics emissions less than 40 dB below the limit were recorded. |                        |                        |                            |                                     |        |             |             |

Carrier Frequency (MHz): 1880.0

Power (dBm): 23.3

Limit (dBc):  $-(43+10\log P_{\text{(in watts)}})$  -36.3

Test Frequency Range (MHz): 30-20000

| Frequency (MHz)  | E-Field (dB $\mu$ V/m) | EMI Detector (Peak/QP) | Antenna Polarization (H/V) | ERP measured by Substitution Method |        | Limit (dBc) | Margin (dB) |
|--|------------------------|------------------------|----------------------------|-------------------------------------|--------|-------------|-------------|
|  |                        |                        |                            | (dBm)                               | (dBc)  |             |             |
| 3760.00  | 65.43                  | Peak                   | V                          | -35.81                              | -59.11 | -36.3       | -22.81      |
| 3760.00  | 65.82                  | Peak                   | H                          | -35.81                              | -59.11 | -36.3       | -22.81      |
| 5640.00  | 55.64                  | Peak                   | V                          | -48.86                              | -72.16 | -36.3       | -35.86      |
| 5640.00  | 63.37                  | Peak                   | H                          | -38.76                              | -75.06 | -36.3       | -38.76      |
| No spurious emissions were found. All harmonics emissions less than 40 dB below the limit were recorded. |                        |                        |                            |                                     |        |             |             |

Carrier Frequency (MHz): 1908.75  
Power (dBm): 23.3  
Limit (dBc):  $-(43+10\log P_{\text{(in watts)}})$  -36.3  
Test Frequency Range (MHz): 30-20000

| Frequency<br>(MHz)   | E-Field<br>(dB $\mu$ V/m) | EMI<br>Detector<br>(Peak/QP) | Antenna<br>Polarization<br>(H/V) | ERP measured by<br>Substitution Method |        | Limit<br>(dBc) | Margin<br>(dB) |
|--|---------------------------|------------------------------|----------------------------------|--|--------|----------------|----------------|
|  |                           |                              |                                  | (dBm)                                  | (dBc)  |                |                |
| 3817.50  | 66.21                     | Peak                         | V                                | -34.20                                 | -57.50 | -36.3          | -21.20         |
| 3817.50  | 66.34                     | Peak                         | H                                | -33.13                                 | -56.43 | -36.3          | -20.13         |
| 5726.25  | 59.92                     | Peak                         | V                                | -43.88                                 | -67.18 | -36.3          | -30.88         |
| 5726.25  | 65.92                     | Peak                         | H                                | -36.35                                 | -59.65 | -36.3          | -23.35         |
| No spurious emissions were found. All harmonics emissions less than 40 dB below the limit were recorded. |                           |                              |                                  |  |        |                |                |

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MIS-028FCC22-24  
April 11, 2005

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

## EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

### 7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

| CONTRIBUTION<br>(Radiated Emissions)   | PROBABILITY<br>DISTRIBUTION | UNCERTAINTY (+ dB) |                 |
|--|-----------------------------|--------------------|-----------------|
|  |                             | 3 m                | 10 m            |
| Antenna Factor Calibration   | Normal (k=2)                | $\pm 1.0$          | $\pm 1.0$       |
| Cable Loss Calibration   | Normal (k=2)                | $\pm 0.3$          | $\pm 0.5$       |
| EMI Receiver specification   | Rectangular                 | $\pm 1.5$          | $\pm 1.5$       |
| Antenna Directivity  | Rectangular                 | $\pm 0.5$          | $\pm 0.5$       |
| Antenna factor variation with height   | Rectangular                 | $\pm 2.0$          | $\pm 0.5$       |
| Antenna phase center variation   | Rectangular                 | 0.0                | $\pm 0.2$       |
| Antenna factor frequency interpolation   | Rectangular                 | $\pm 0.25$         | $\pm 0.25$      |
| Measurement distance variation   | Rectangular                 | $\pm 0.6$          | $\pm 0.4$       |
| Site imperfections   | Rectangular                 | $\pm 2.0$          | $\pm 2.0$       |
| Mismatch: Receiver VRC $\Gamma_1 = 0.2$<br>Antenna VRC $\Gamma_R = 0.67(Bi) 0.3 (Lp)$<br>Uncertainty limits $20\text{Log}(1+\Gamma_1\Gamma_R)$ | U-Shaped                    | $+1.1$<br>$-1.25$  | $\pm 0.5$       |
| System repeatability   | Std. Deviation              | $\pm 0.5$          | $\pm 0.5$       |
| Repeatability of EUT   |                             | -                  | -               |
| Combined standard uncertainty  | Normal                      | $+2.19 / -2.21$    | $+1.74 / -1.72$ |
| Expanded uncertainty U   | Normal (k=2)                | $+4.38 / -4.42$    | $+3.48 / -3.44$ |

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k = 2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$



## EXHIBIT 8. MEASUREMENT METHODS

### 8.1. CONDUCTED POWER MEASUREMENTS

- The following shall be applied to the combination(s) of the radio device and its intended antenna(e).
- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
- The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
- The measurement shall be performed using normal operation of the equipment with modulation.

Test procedure shall be as follows:

**Step 1:** Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter,  $x = \text{Tx on} / (\text{Tx on} + \text{Tx off})$  with  $0 < x < 1$ , is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


**Step 2:** Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$\text{EIRP} = A + G + 10\log(1/x)$$

{  $X = 1$  for continuous transmission  $\Rightarrow 10\log(1/x) = 0 \text{ dB}$  }

**Figure 1.**

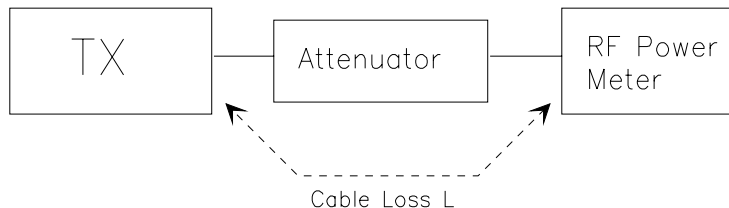

## 8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

### 8.2.1. Maximizing RF Emission Level (E-Field)

- (a) The measurements was performed with full rf output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
E (dBuV/m) = Reading (dBuV) + Total Correction Factor (dB/m)

- (f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency  
Resolution BW: 100 kHz  
Video BW: same  
Detector Mode: positive  
Average: off  
Span: 3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies

### 8.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source  
Resolution BW: 10 kHz  
Video BW: same  
Detector Mode: positive  
Average: off  
Span: 3 x the signal bandwidth

- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- (c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.  
(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
  - ◆ DIPOLE antenna for frequency from 30-1000 MHz or
  - ◆ HORN antenna for frequency above 1 GHz }.(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.  
(f) Use one of the following antenna as a receiving antenna:
  - ◆ DIPOLE antenna for frequency from 30-1000 MHz or
  - ◆ HORN antenna for frequency above 1 GHz }.(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.  
(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.  
(i) Tune the EMI Receivers to the test frequency.  
(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.  
(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.  
(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.  
(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.  
(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$\text{EIRP} = P + G1 = P3 + L2 - L1 + A + G1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.  
P1: Power output from the signal generator  
P2: Power measured at attenuator A input  
P3: Power reading on the Average Power Meter  
EIRP: EIRP after correction  
ERP: ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)  
(p) Repeat step (d) to (o) for different test frequency  
(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.  
(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

Figure 2

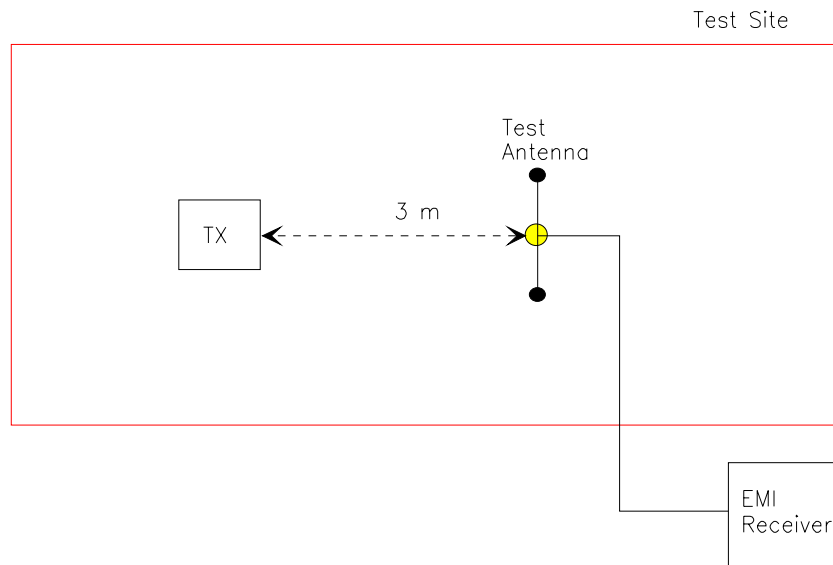


Figure 3

