



Appendix D

RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: Mini PC

Test Model: ArieBox10

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Nick Peng





D.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant0	23.342	----	Pass
NVNT	a	5200	Ant0	24.43	----	Pass
NVNT	a	5240	Ant0	22.983	----	Pass
NVNT	n20	5180	Ant0	24.575	----	Pass
NVNT	n20	5200	Ant0	25.358	----	Pass
NVNT	n20	5240	Ant0	27.722	----	Pass
NVNT	n40	5190	Ant0	46.255	----	Pass
NVNT	n40	5230	Ant0	39.64	----	Pass
NVNT	ac20	5180	Ant0	25.928	----	Pass
NVNT	ac20	5200	Ant0	27.646	----	Pass
NVNT	ac20	5240	Ant0	28.163	----	Pass
NVNT	ac40	5190	Ant0	41.189	----	Pass
NVNT	ac40	5230	Ant0	40.684	----	Pass
NVNT	ac80	5210	Ant0	78.066	----	Pass
NVNT	ax20	5180	Ant0	27.821	----	Pass
NVNT	ax20	5200	Ant0	29.32	----	Pass
NVNT	ax20	5240	Ant0	26.792	----	Pass
NVNT	ax40	5190	Ant0	39.533	----	Pass
NVNT	ax40	5230	Ant0	43.145	----	Pass
NVNT	ax80	5210	Ant0	78.789	----	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant0

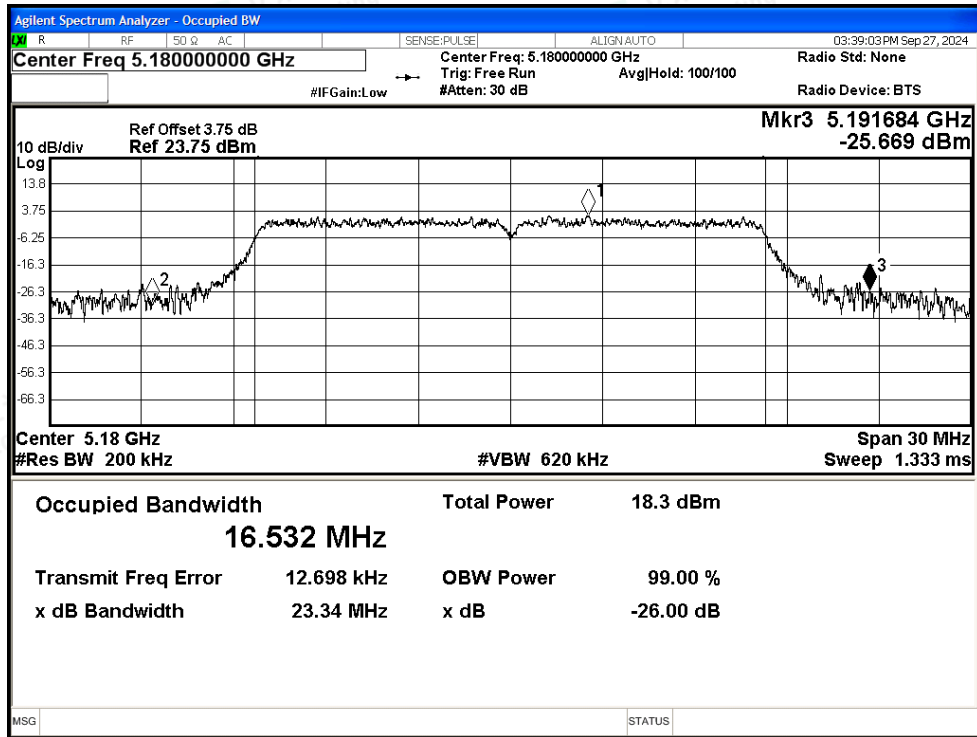


-26dB Bandwidth NVNT a 5200MHz Ant0

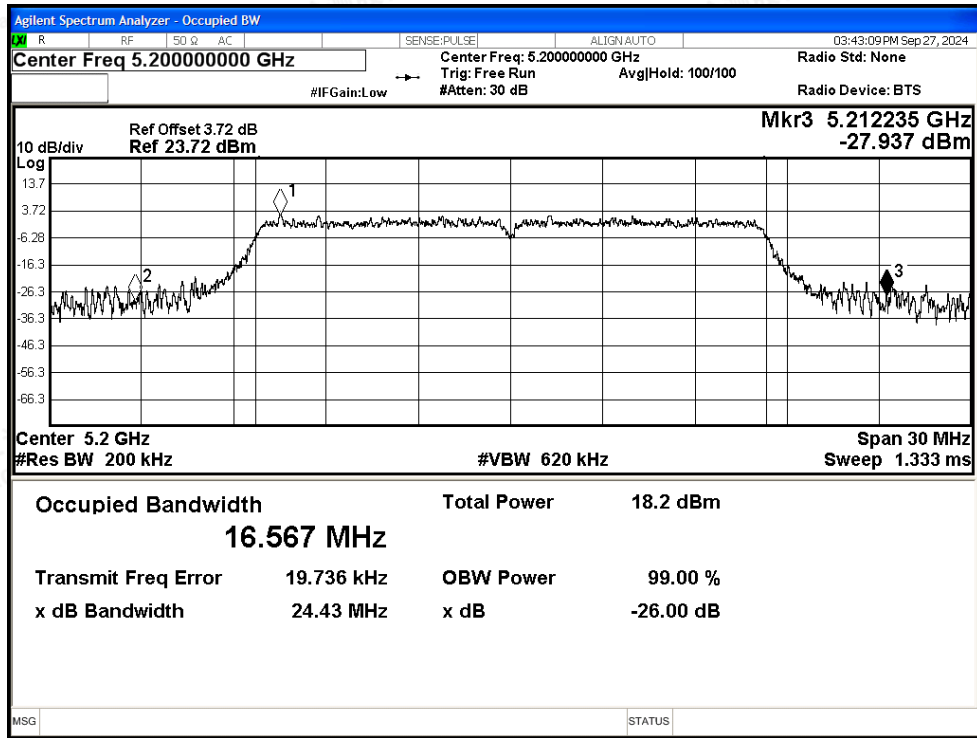




-26dB Bandwidth NVNT a 5240MHz Ant0

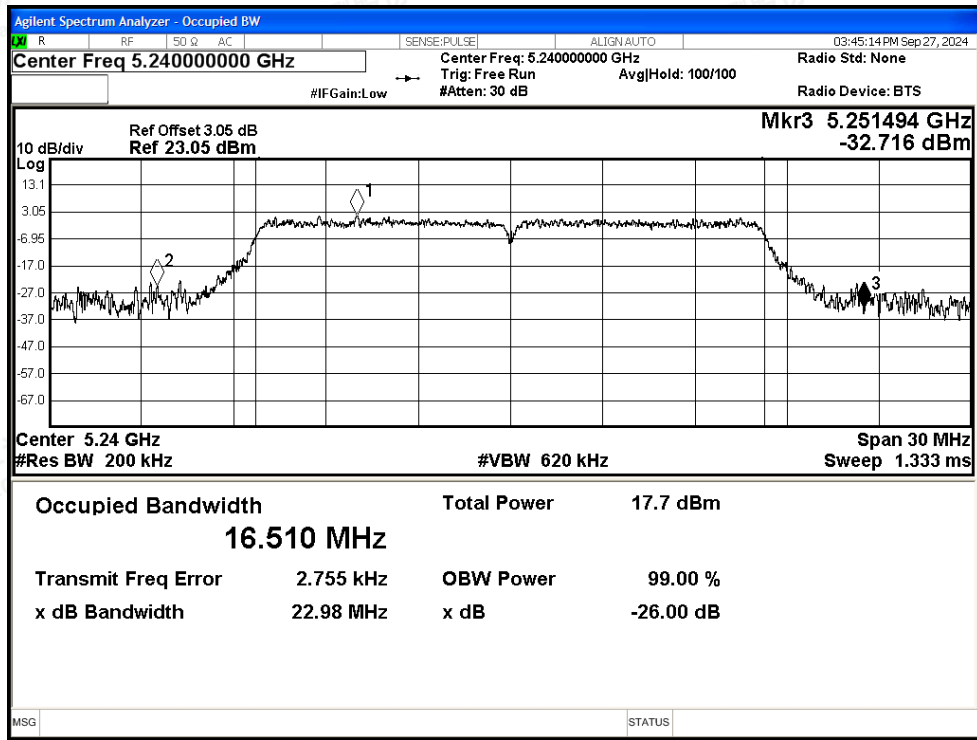

-26dB Bandwidth NVNT n20 5180MHz Ant0


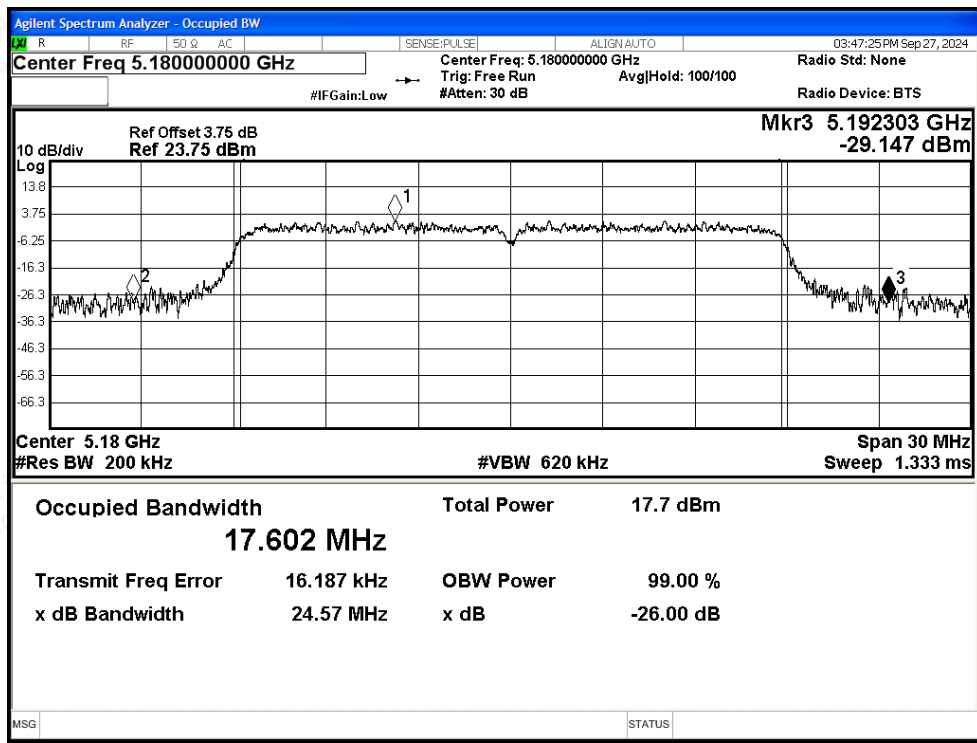




Shenzhen LCS Compliance Testing Laboratory Ltd.



Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China



Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com



Scan code to check authenticity

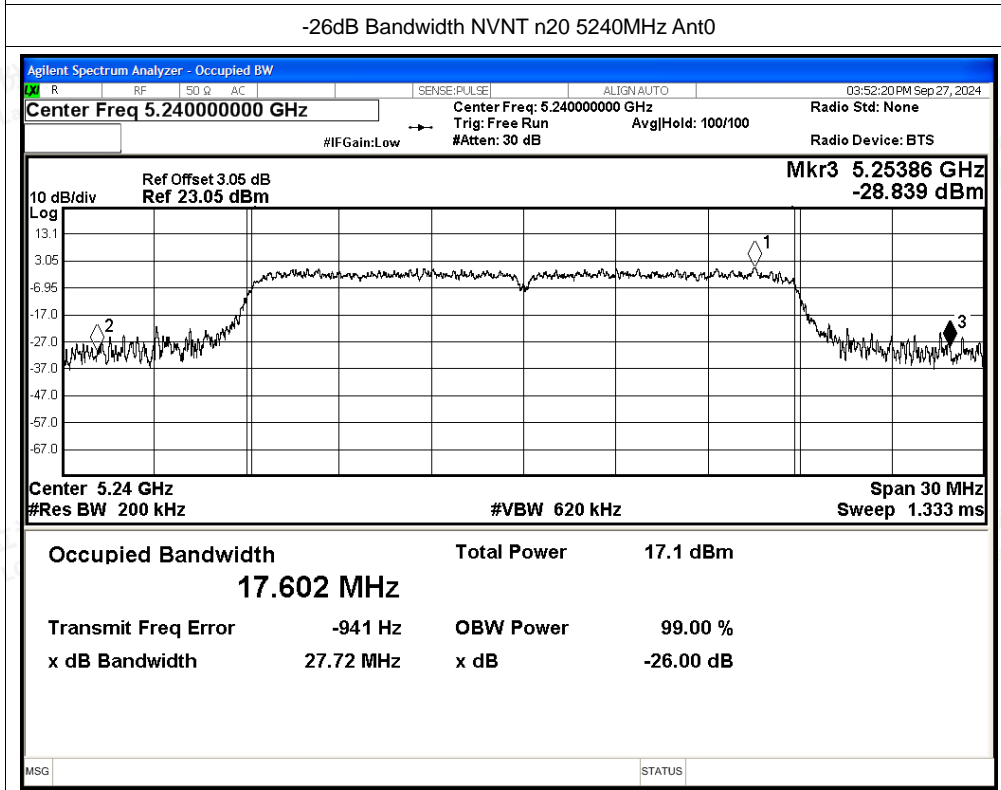
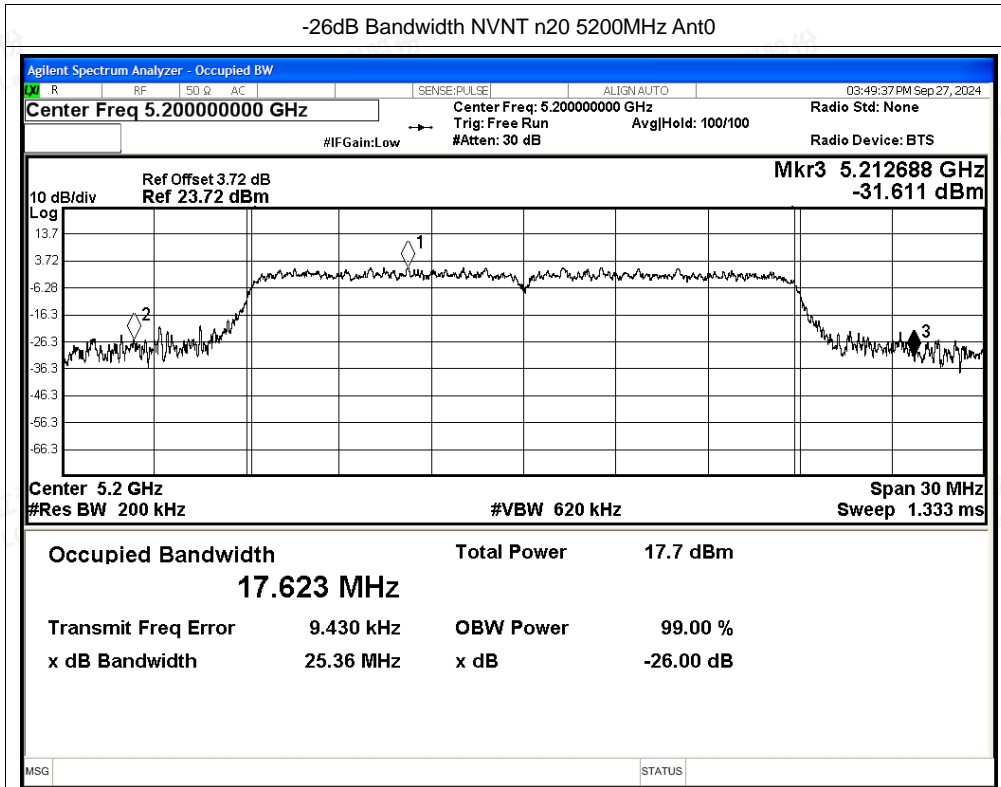


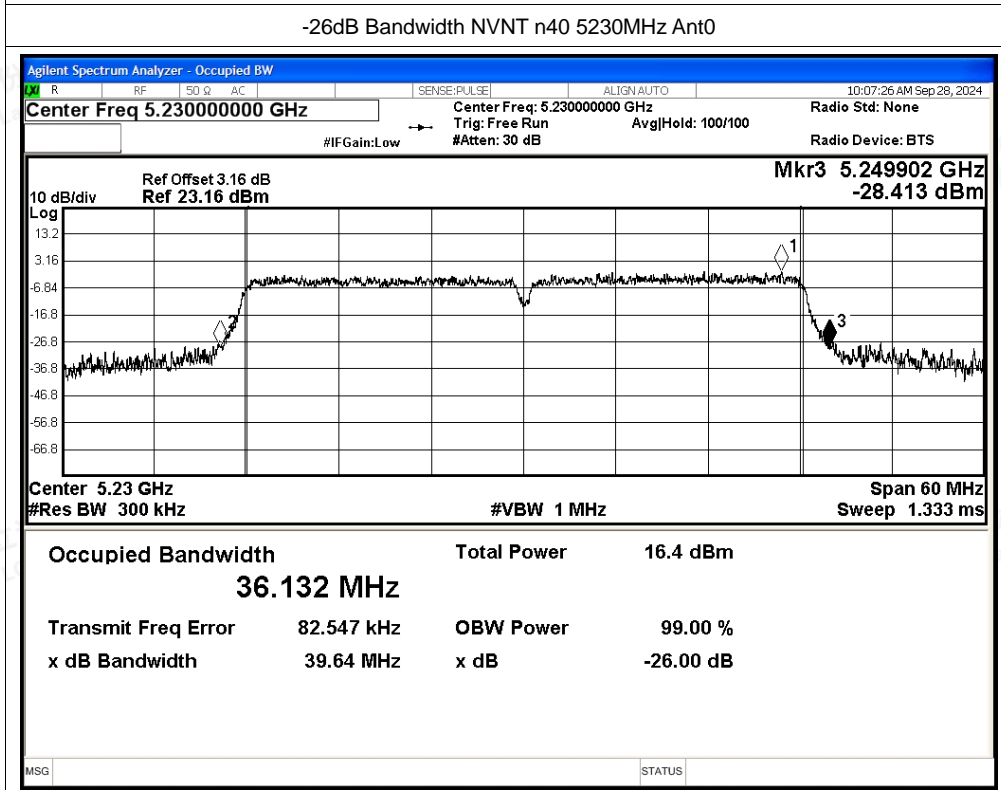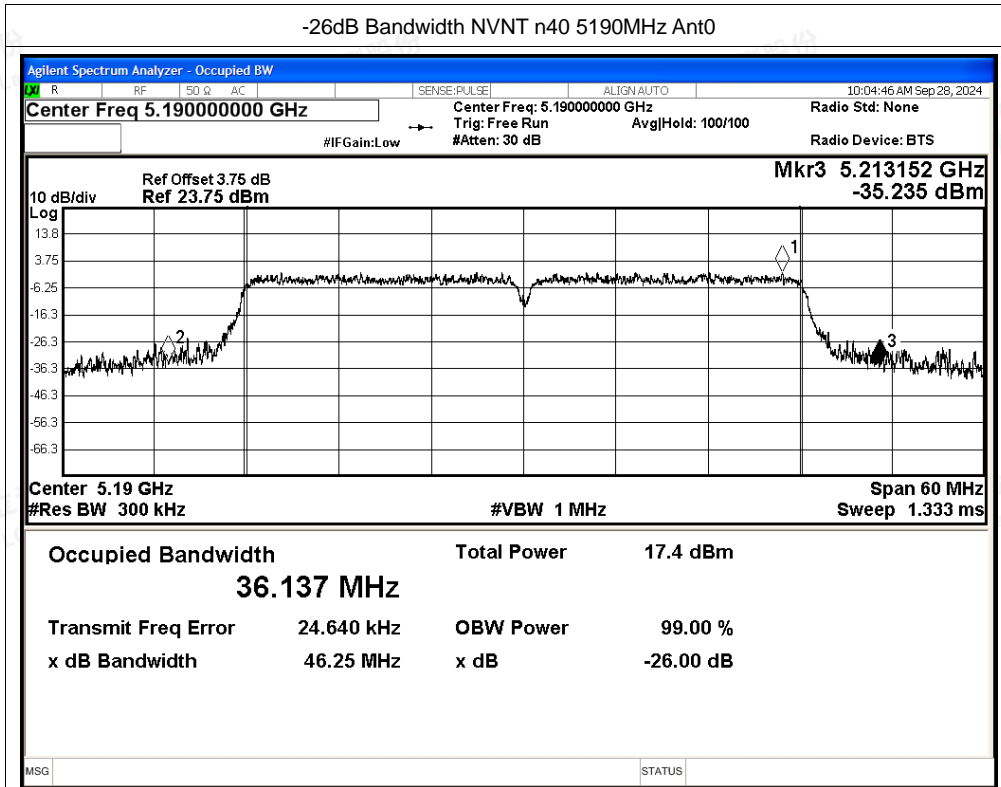

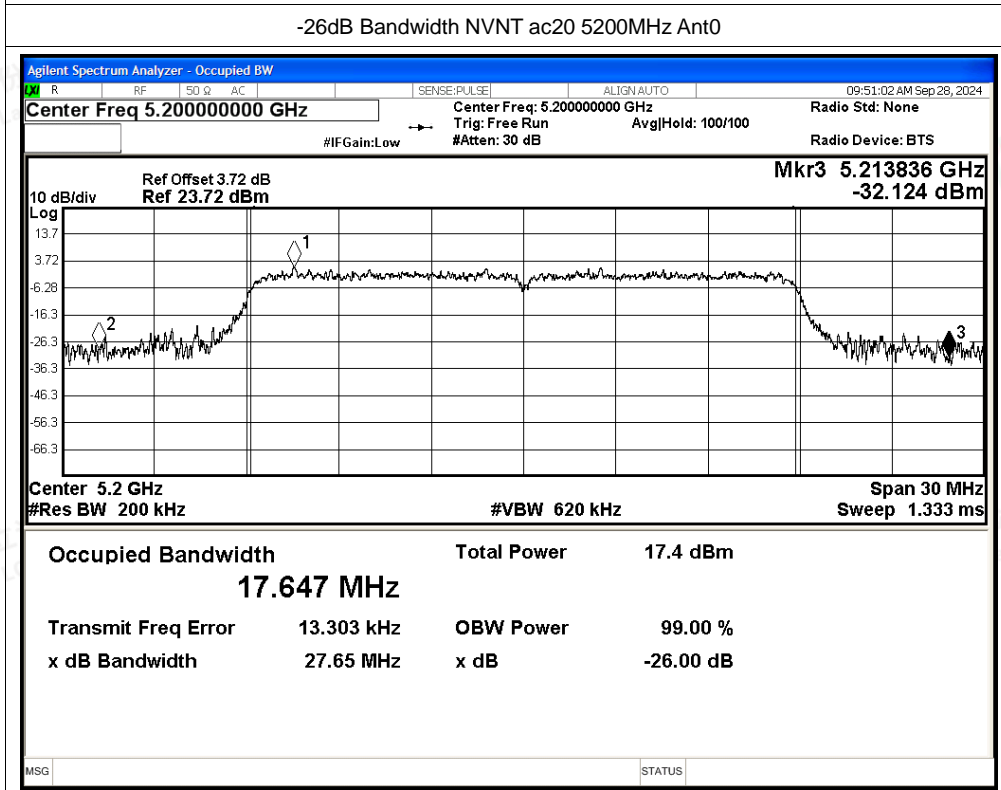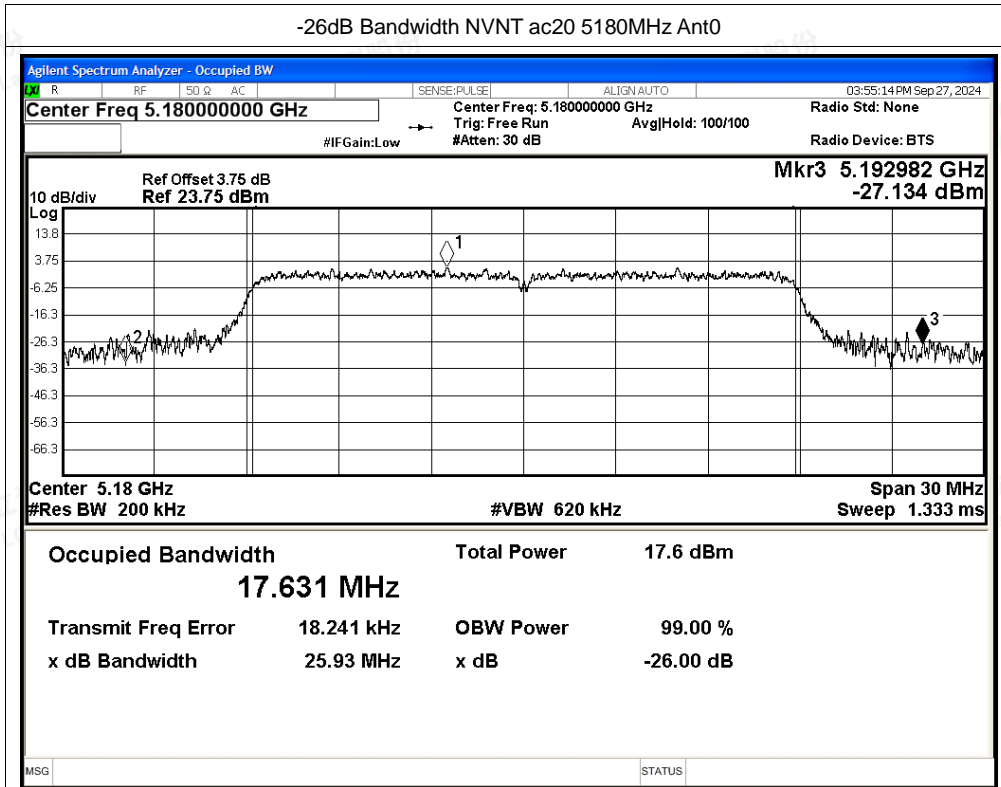

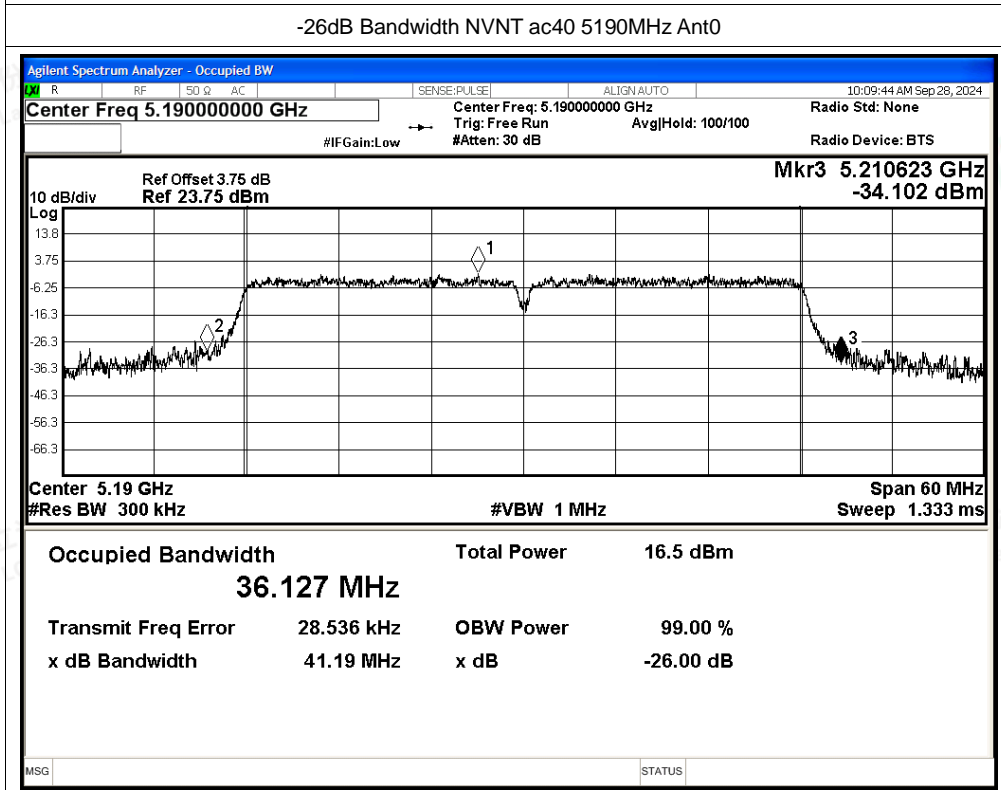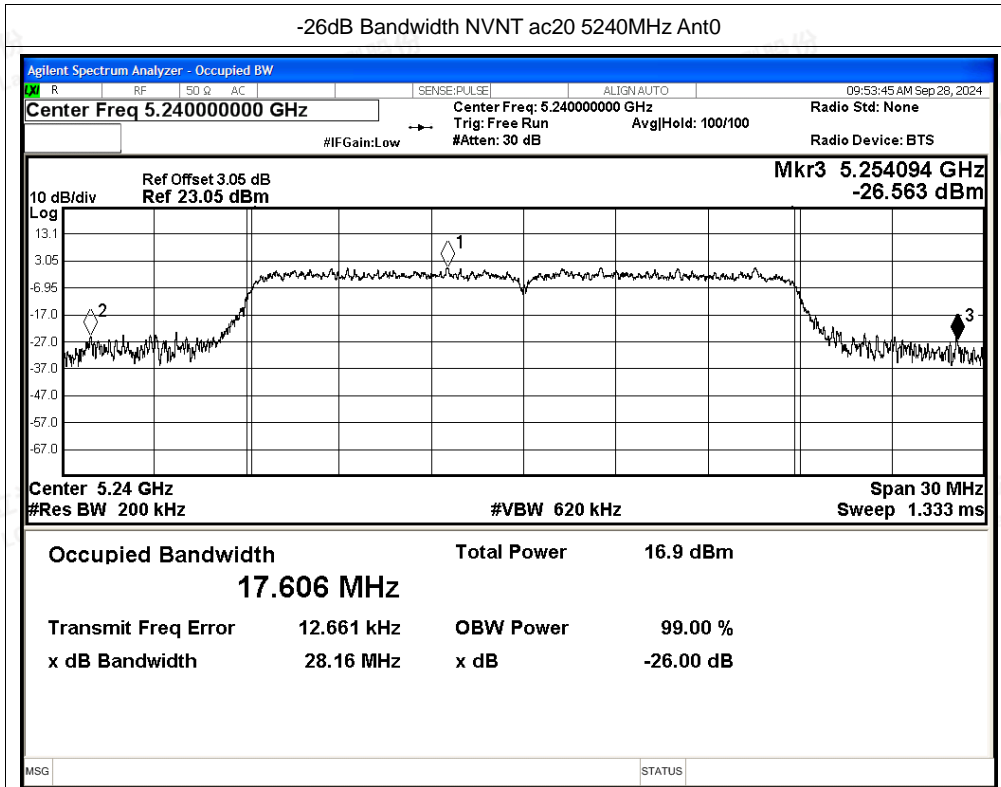


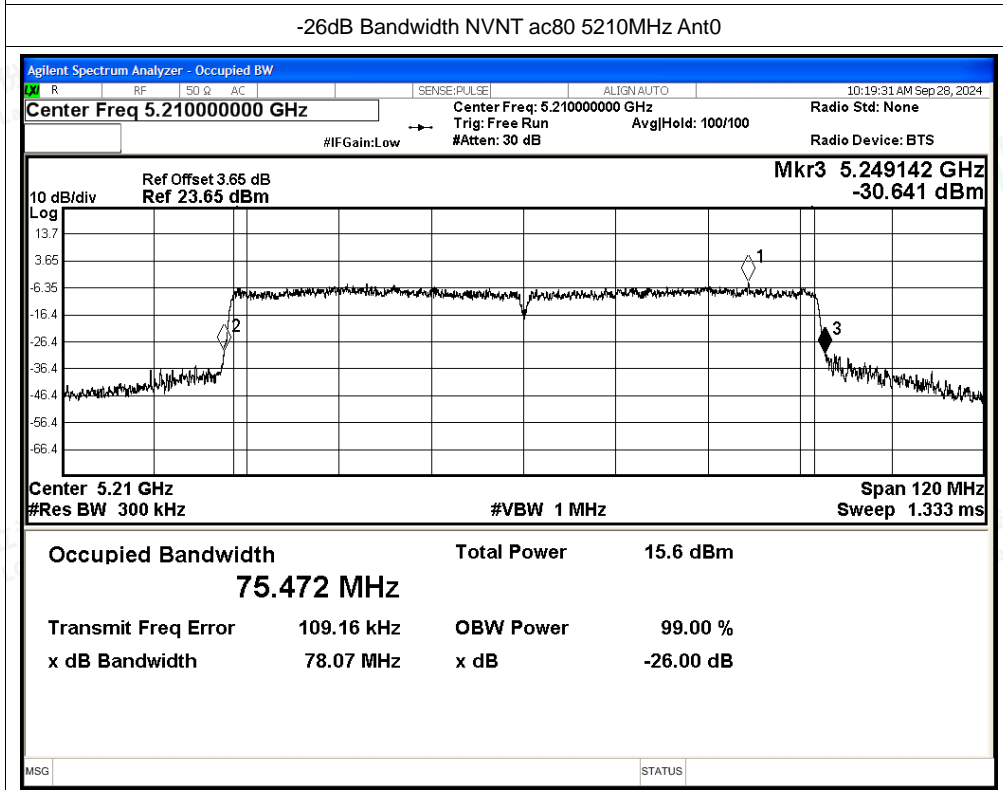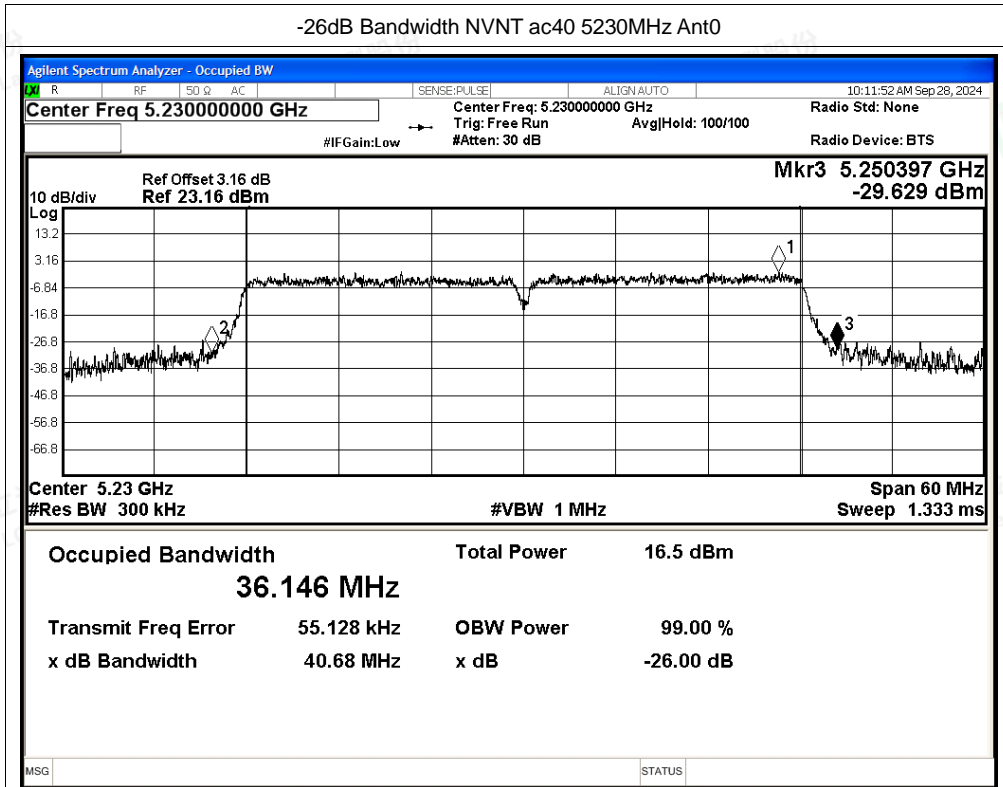

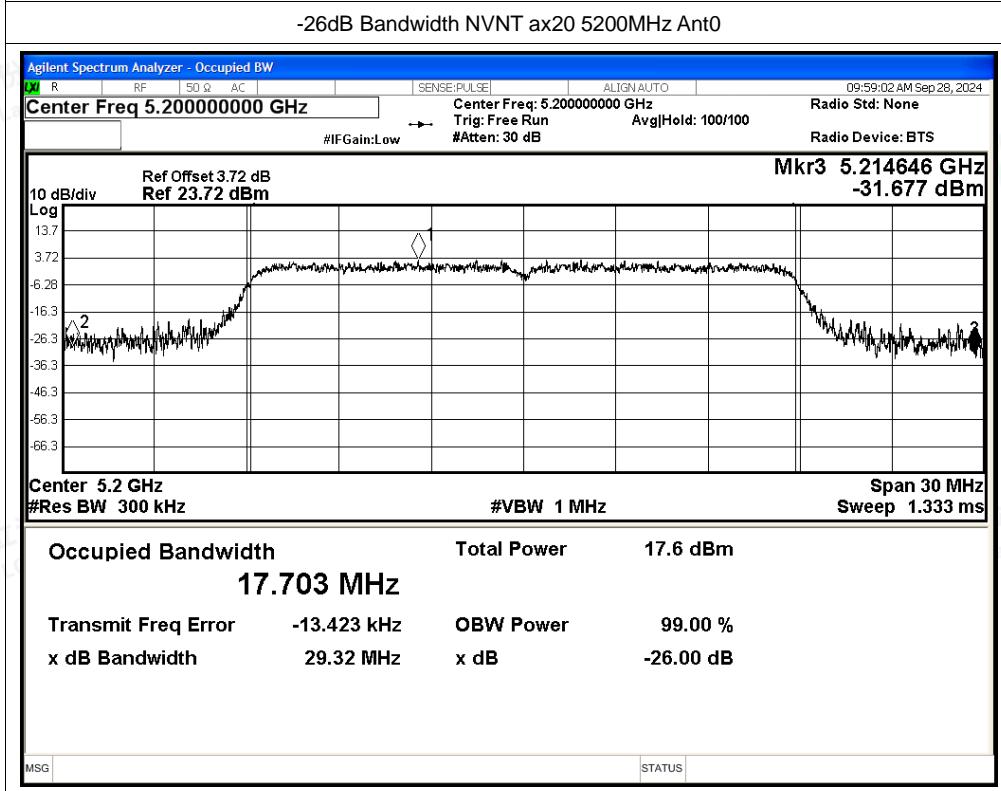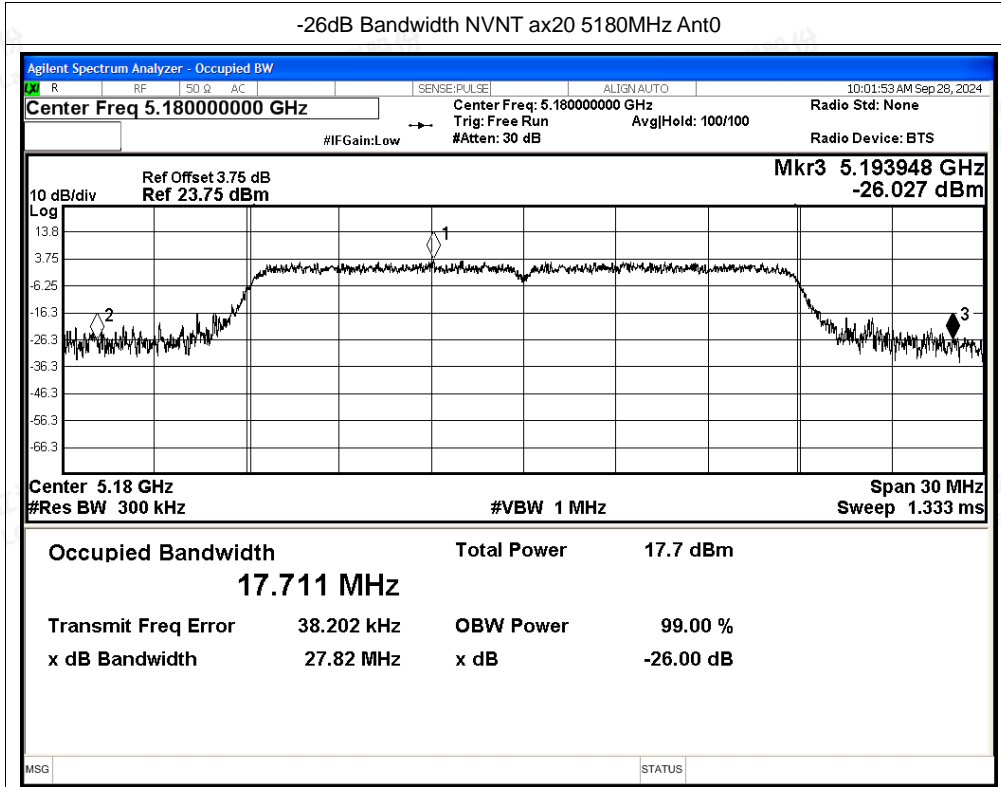






-26dB Bandwidth NVNT ax20 5240MHz Ant0

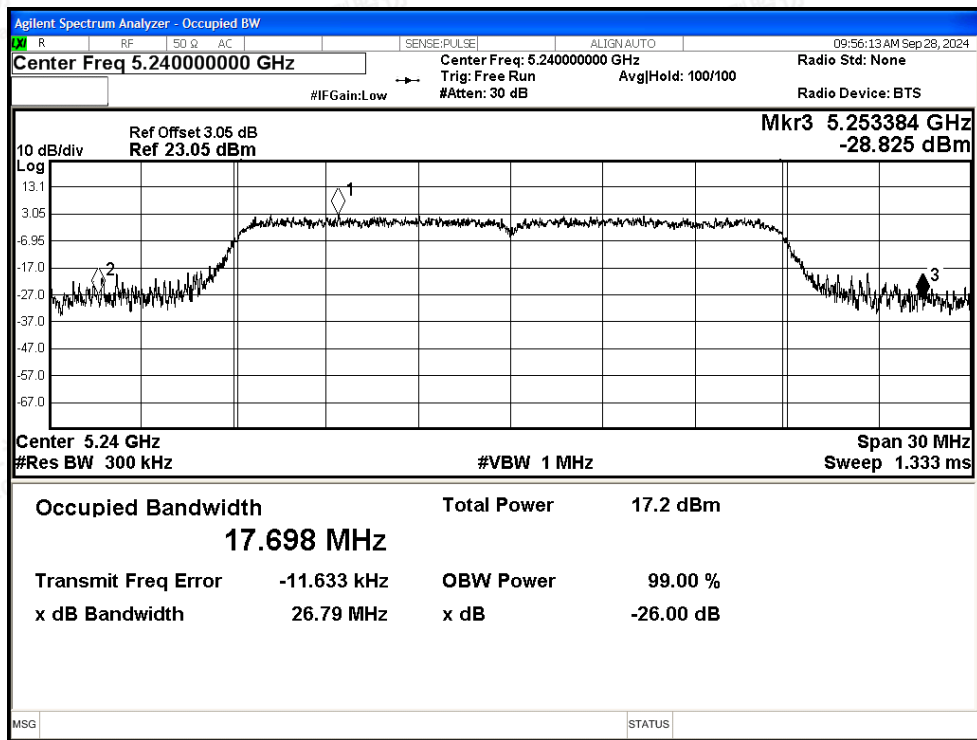

-26dB Bandwidth NVNT ax40 5190MHz Ant0

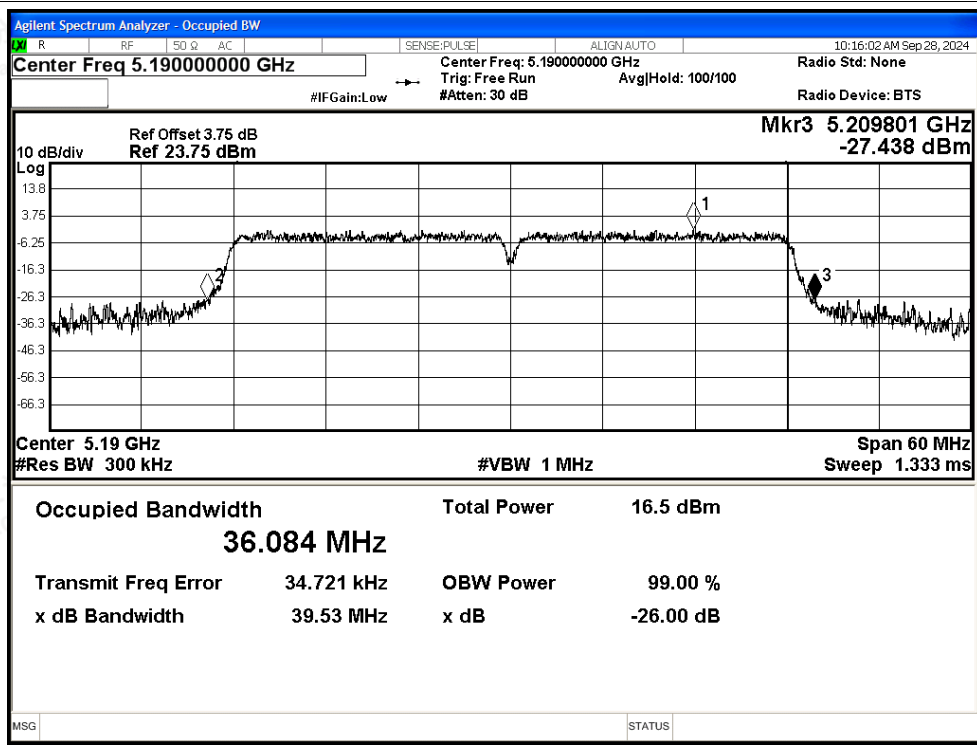

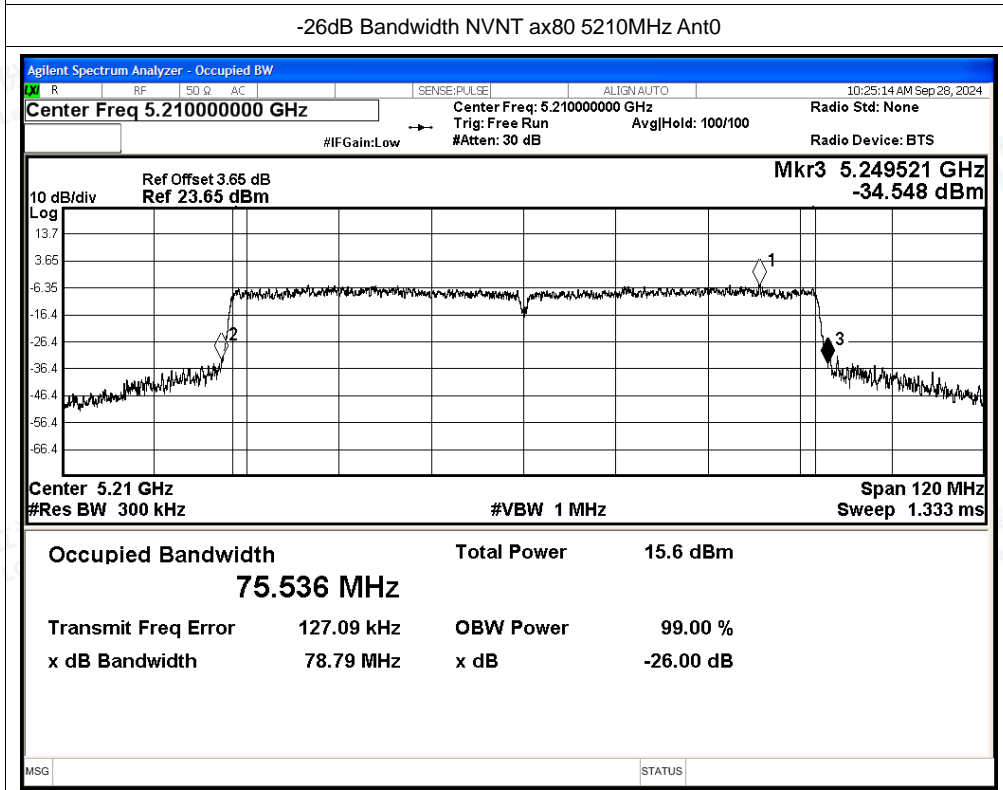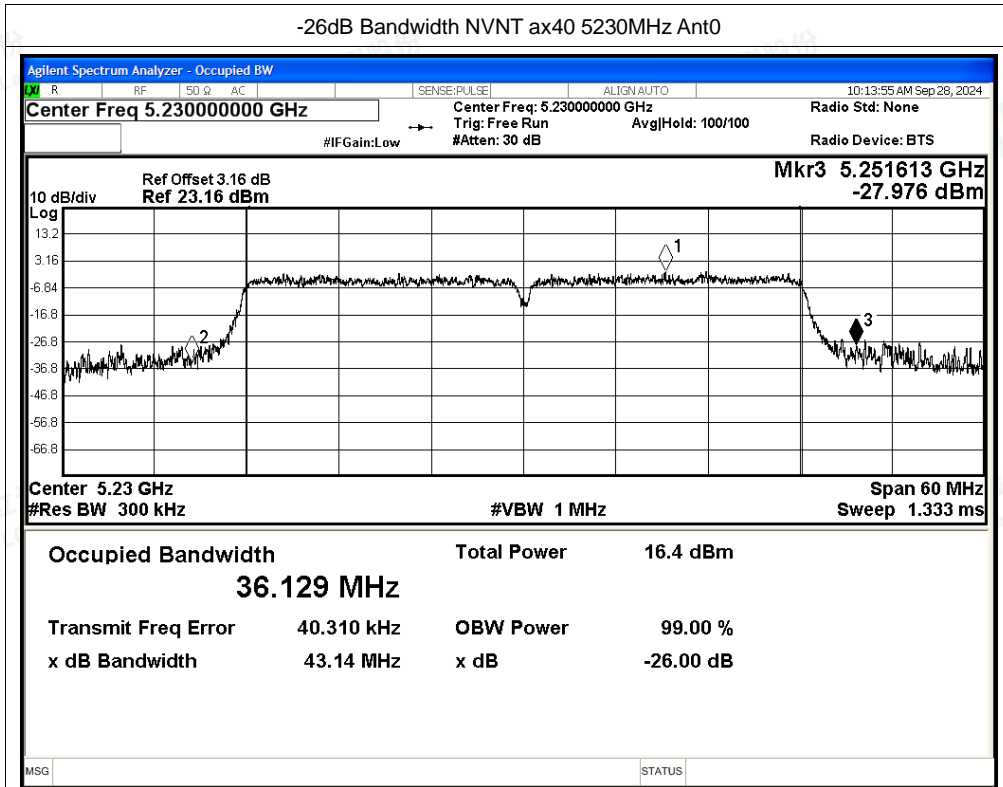

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	23.265	----	Pass
NVNT	a	5200	Ant1	23.874	----	Pass
NVNT	a	5240	Ant1	20.734	----	Pass
NVNT	n20	5180	Ant1	25.005	----	Pass
NVNT	n20	5200	Ant1	24.404	----	Pass
NVNT	n20	5240	Ant1	25.823	----	Pass
NVNT	n40	5190	Ant1	44.44	----	Pass
NVNT	n40	5230	Ant1	39.369	----	Pass
NVNT	ac20	5180	Ant1	26.873	----	Pass
NVNT	ac20	5200	Ant1	27.191	----	Pass
NVNT	ac20	5240	Ant1	25.26	----	Pass
NVNT	ac40	5190	Ant1	43.907	----	Pass
NVNT	ac40	5230	Ant1	44.424	----	Pass
NVNT	ac80	5210	Ant1	78.001	----	Pass
NVNT	ax20	5180	Ant1	27.069	----	Pass
NVNT	ax20	5200	Ant1	27.484	----	Pass
NVNT	ax20	5240	Ant1	25.398	----	Pass
NVNT	ax40	5190	Ant1	42.855	----	Pass
NVNT	ax40	5230	Ant1	44.76	----	Pass
NVNT	ax80	5210	Ant1	78.575	----	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity






Test Graphs



-26dB Bandwidth NVNT a 5180MHz Ant1


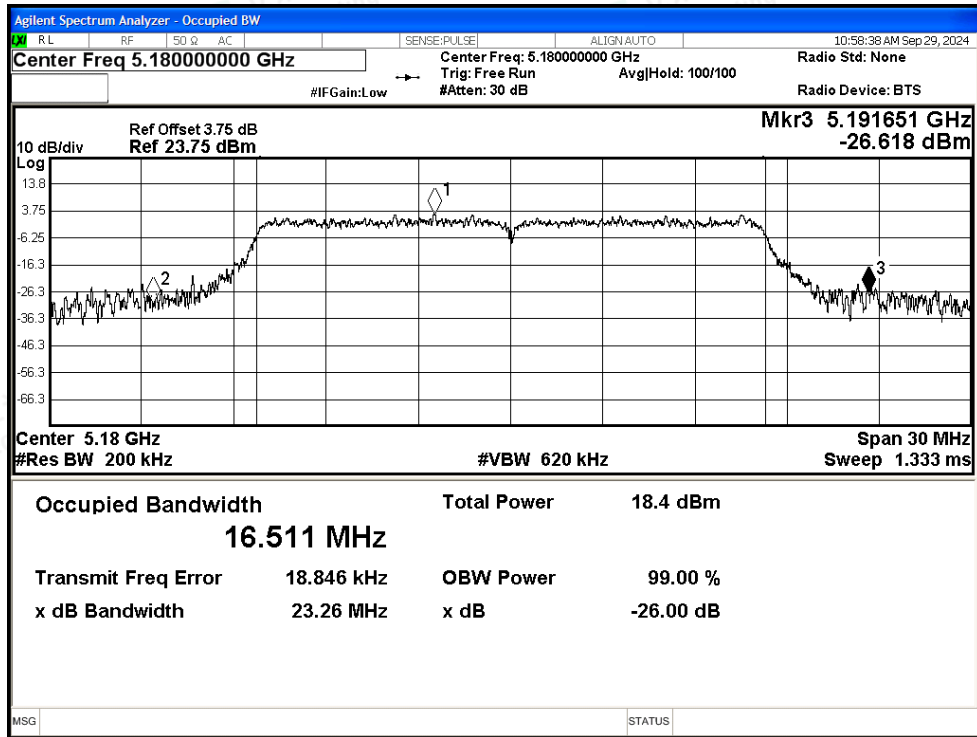




-26dB Bandwidth NVNT a 5200MHz Ant1


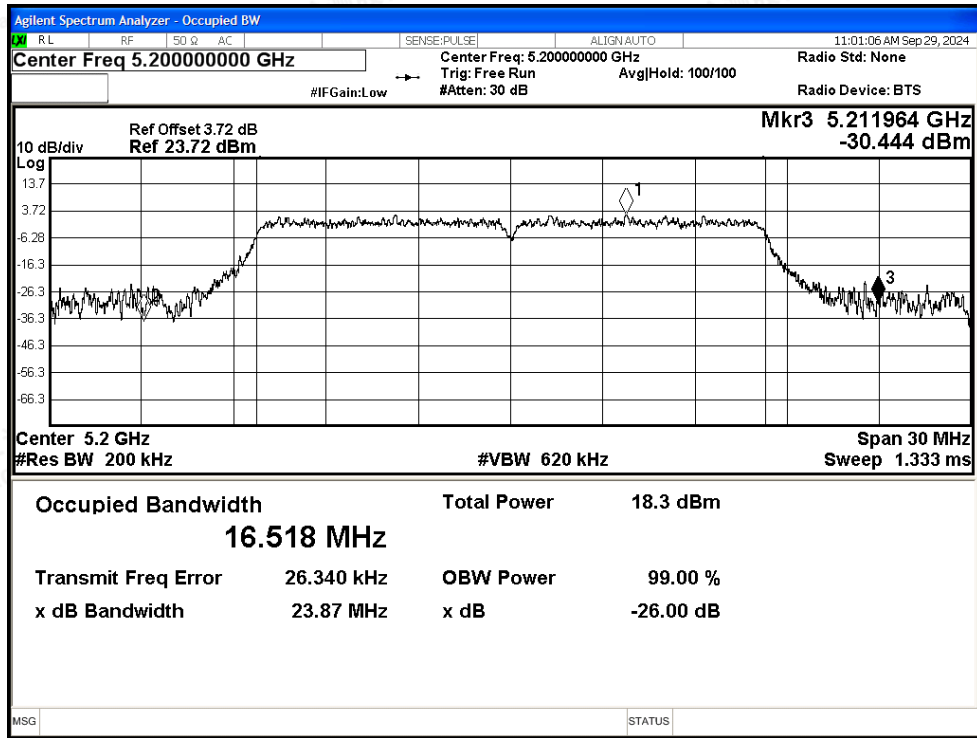


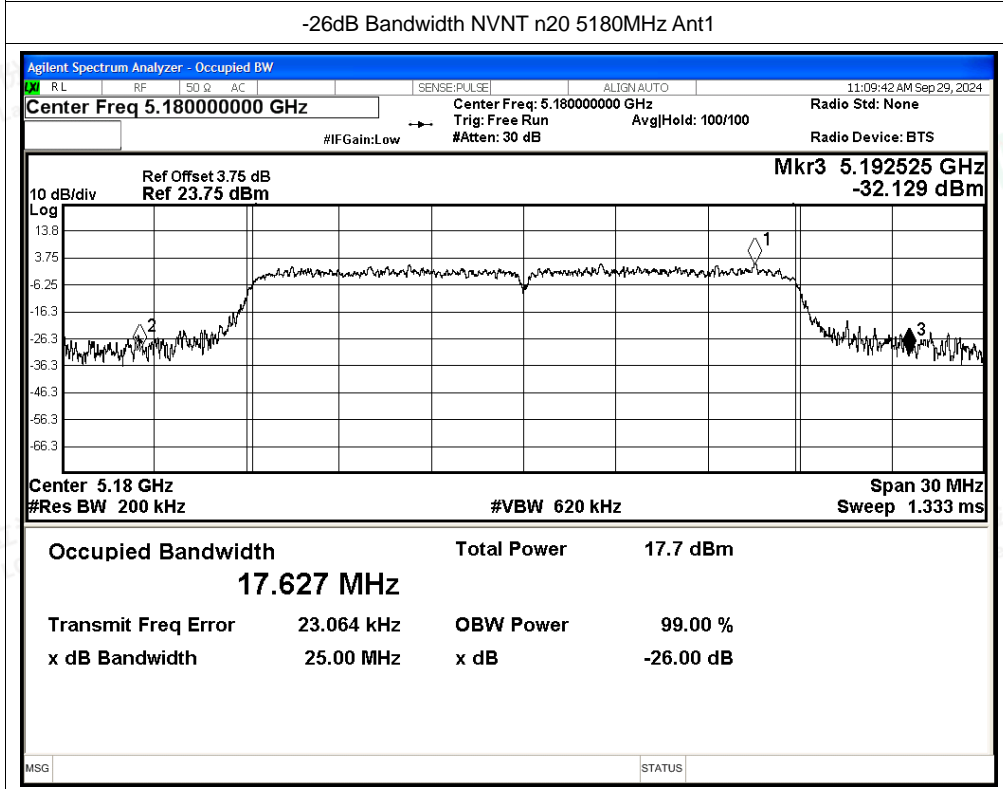
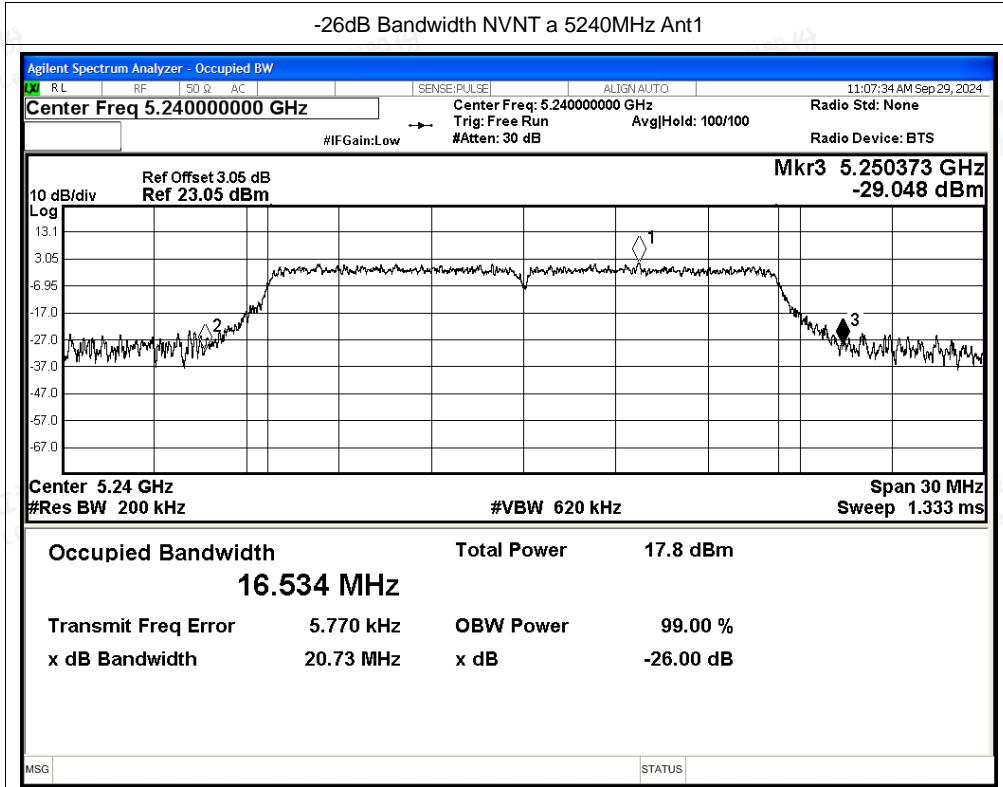


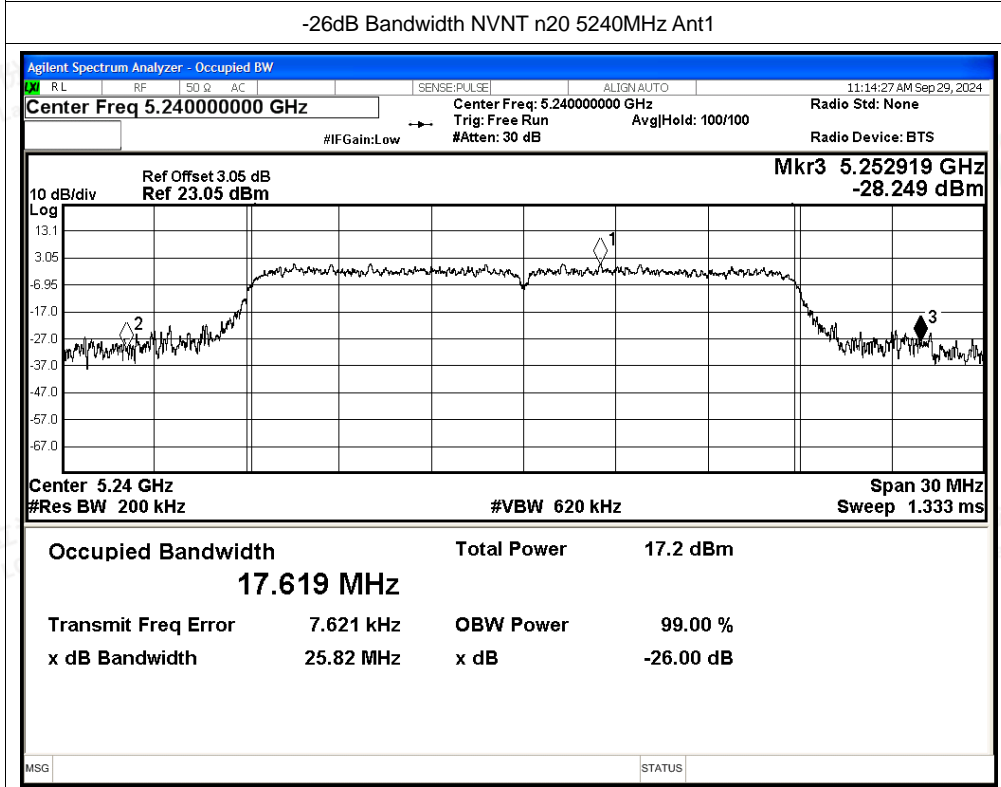
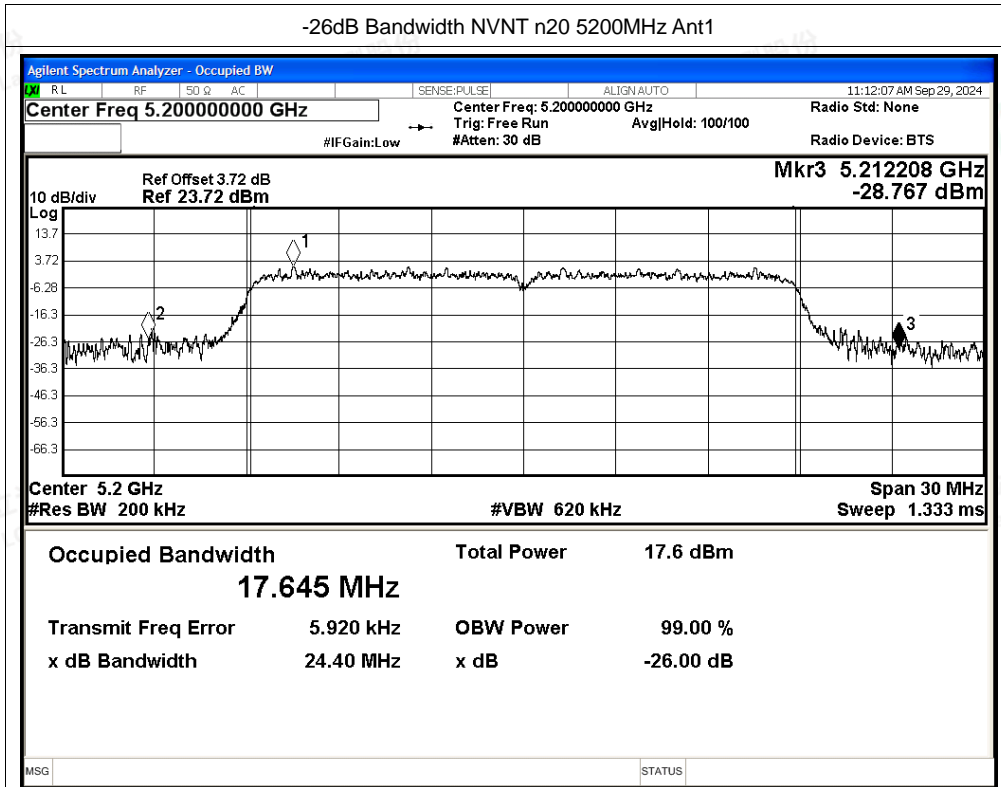


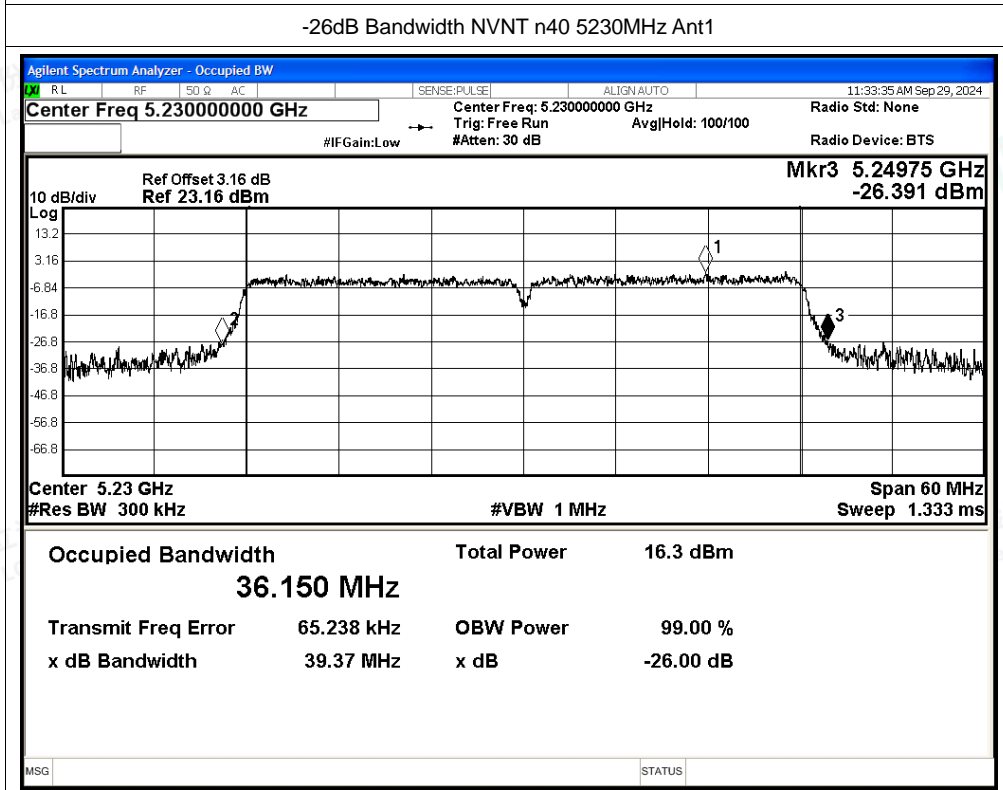
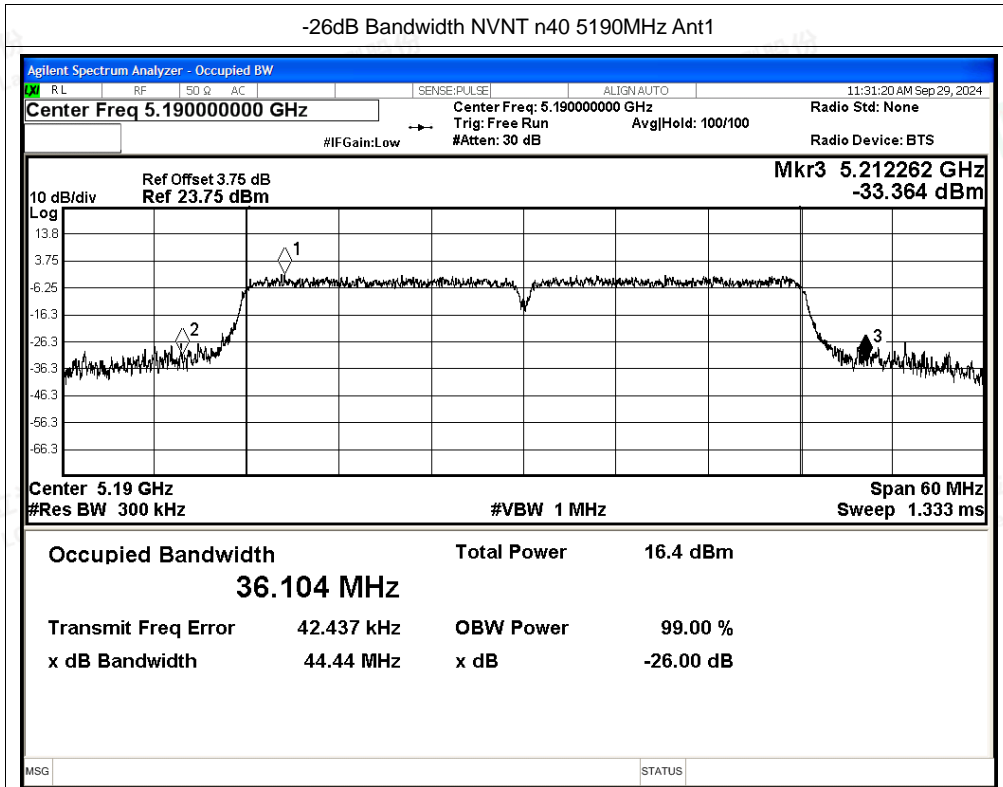


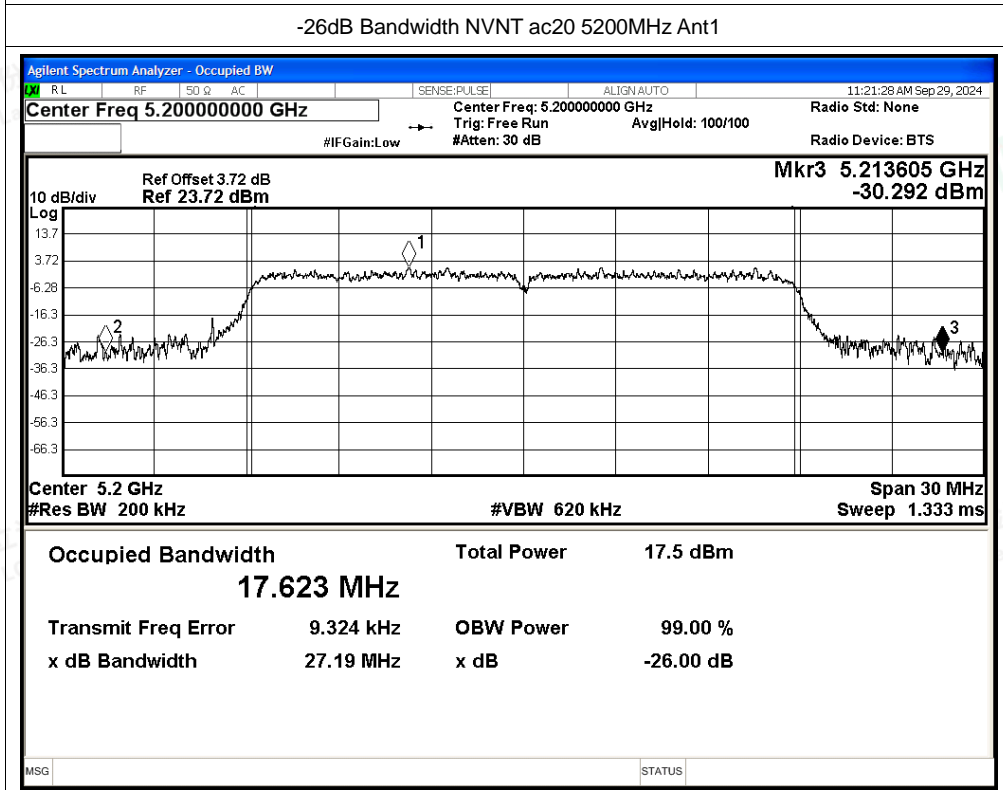
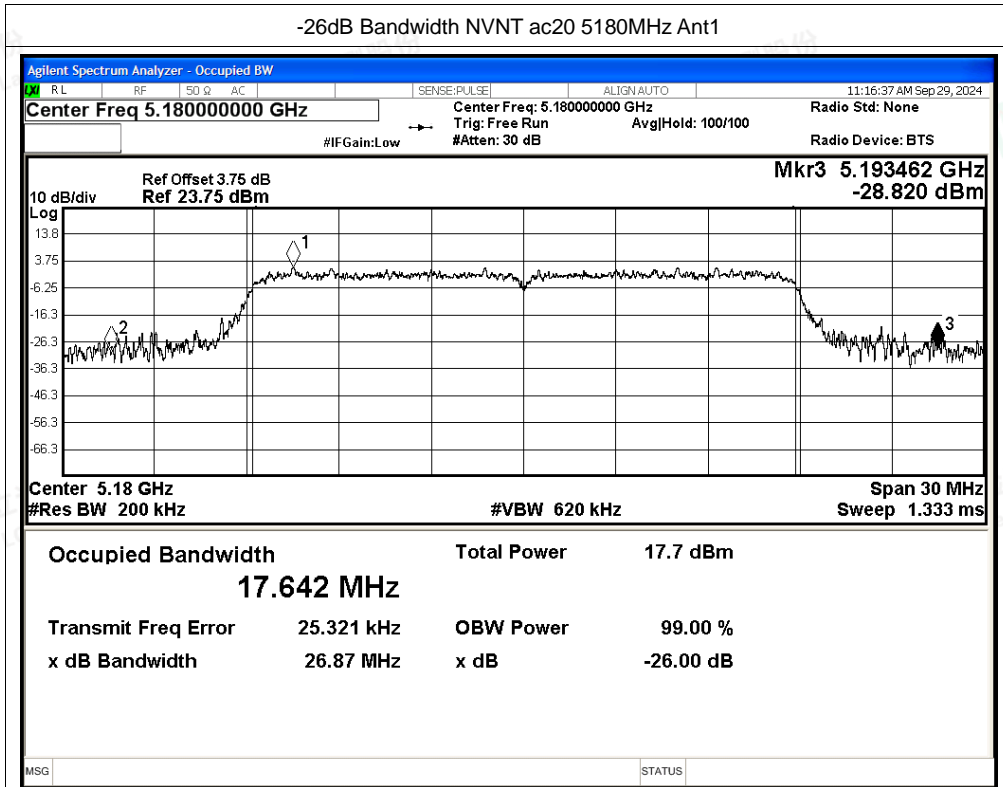


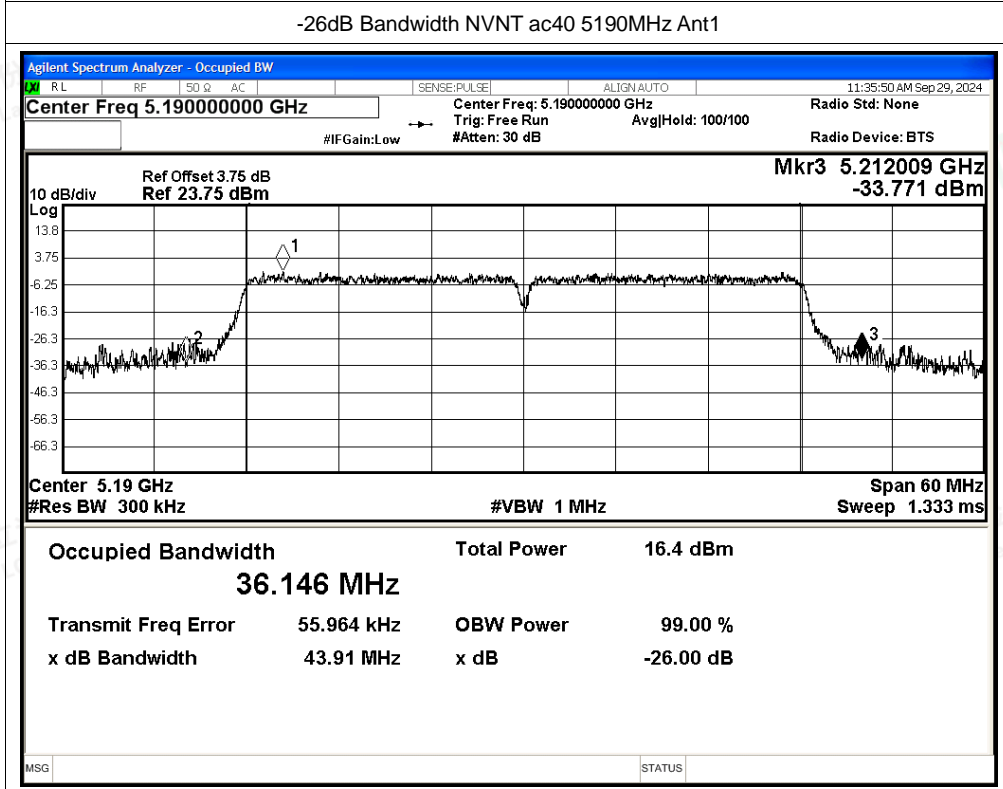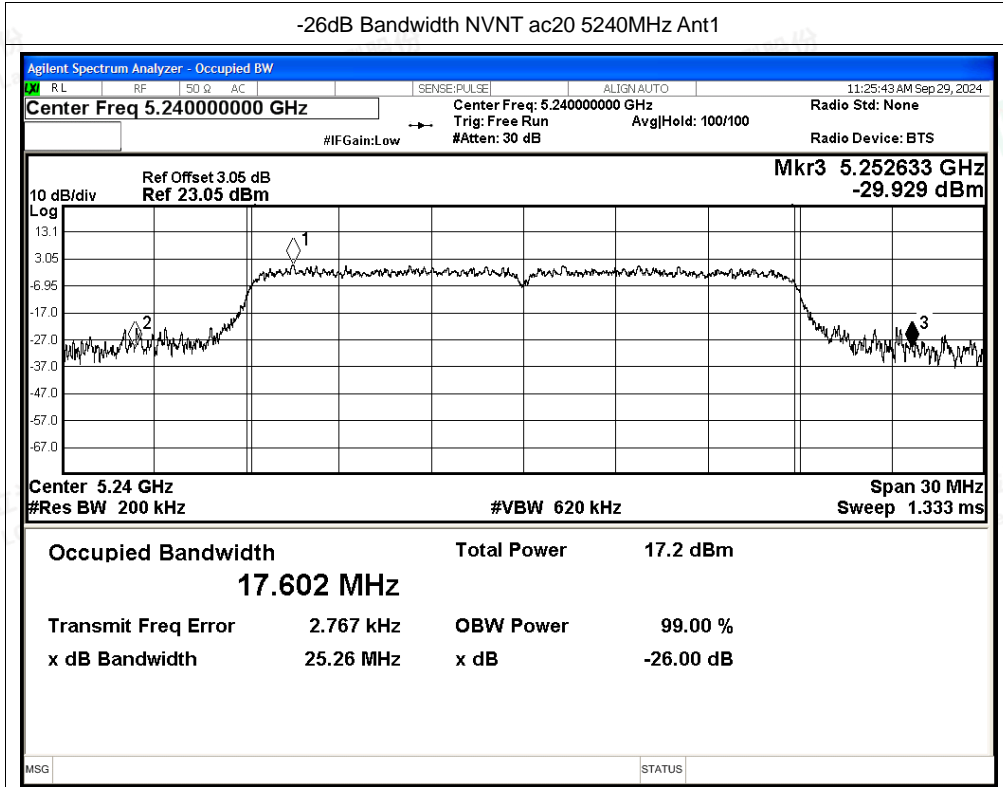

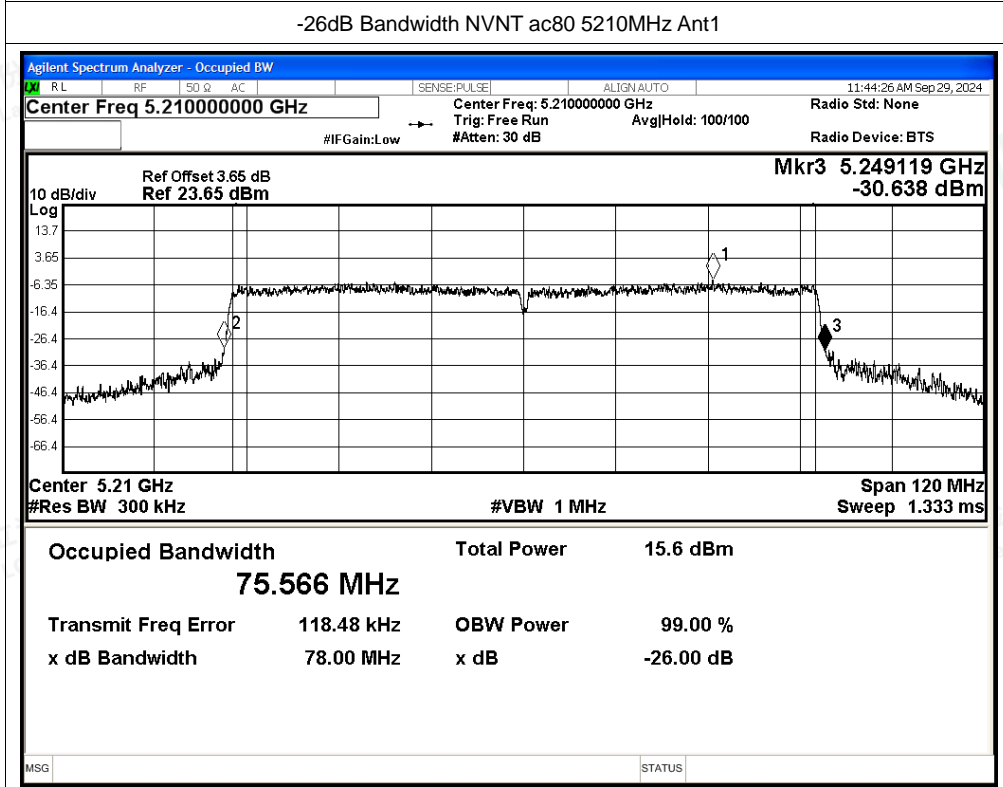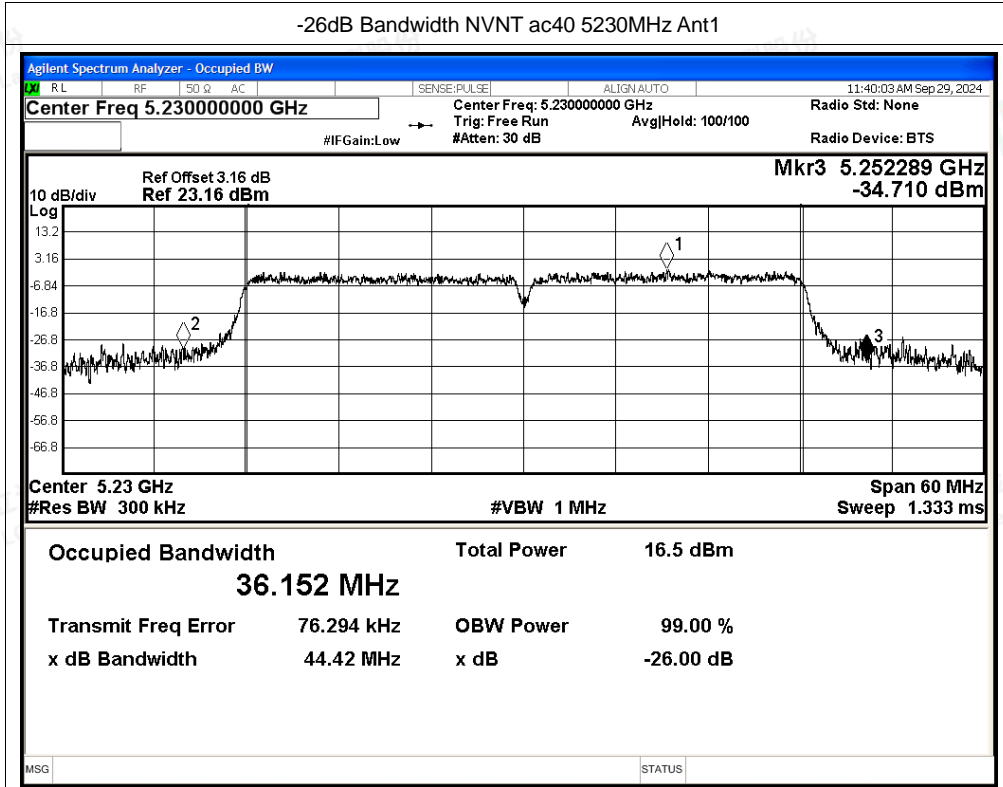

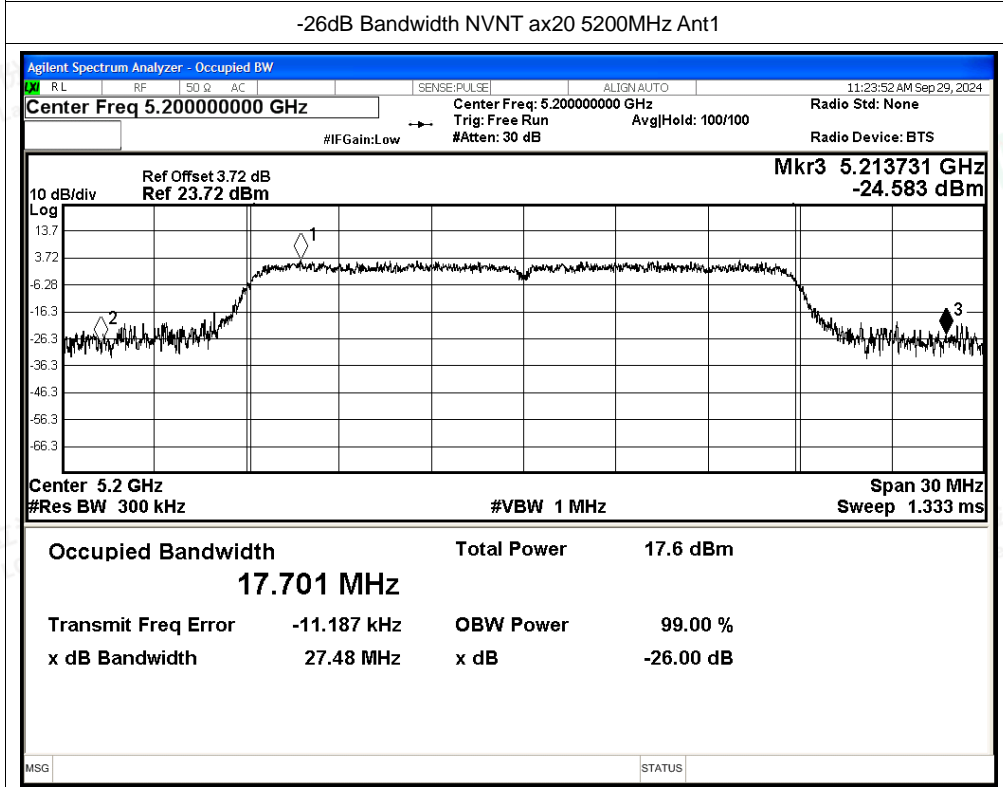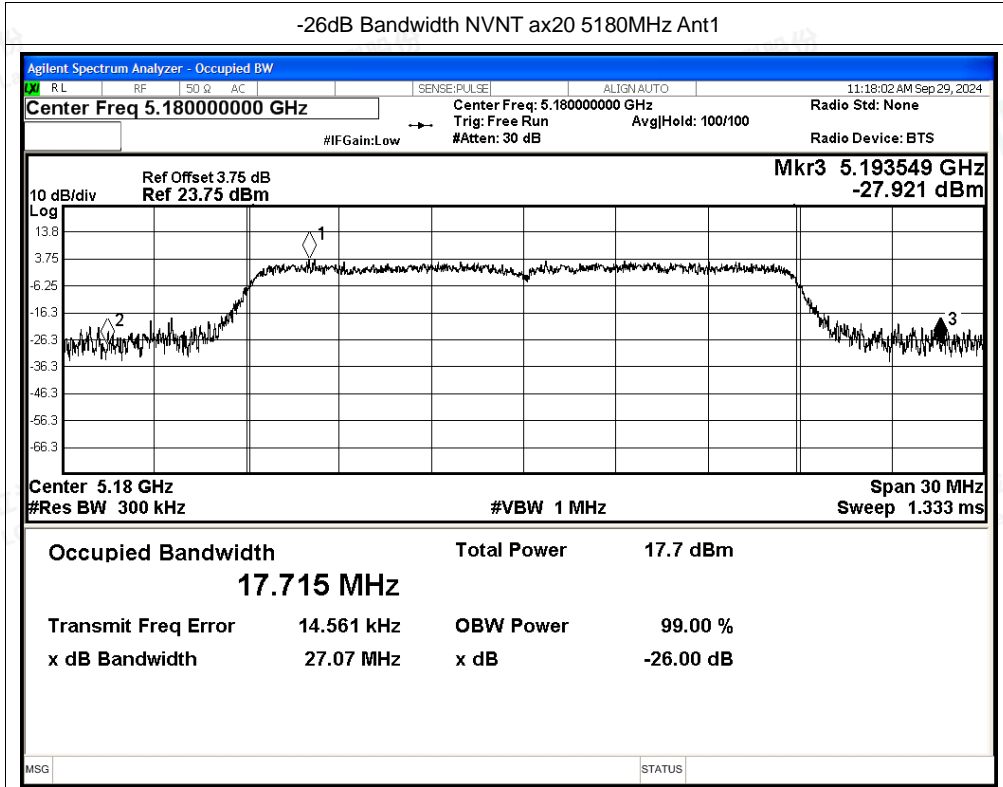

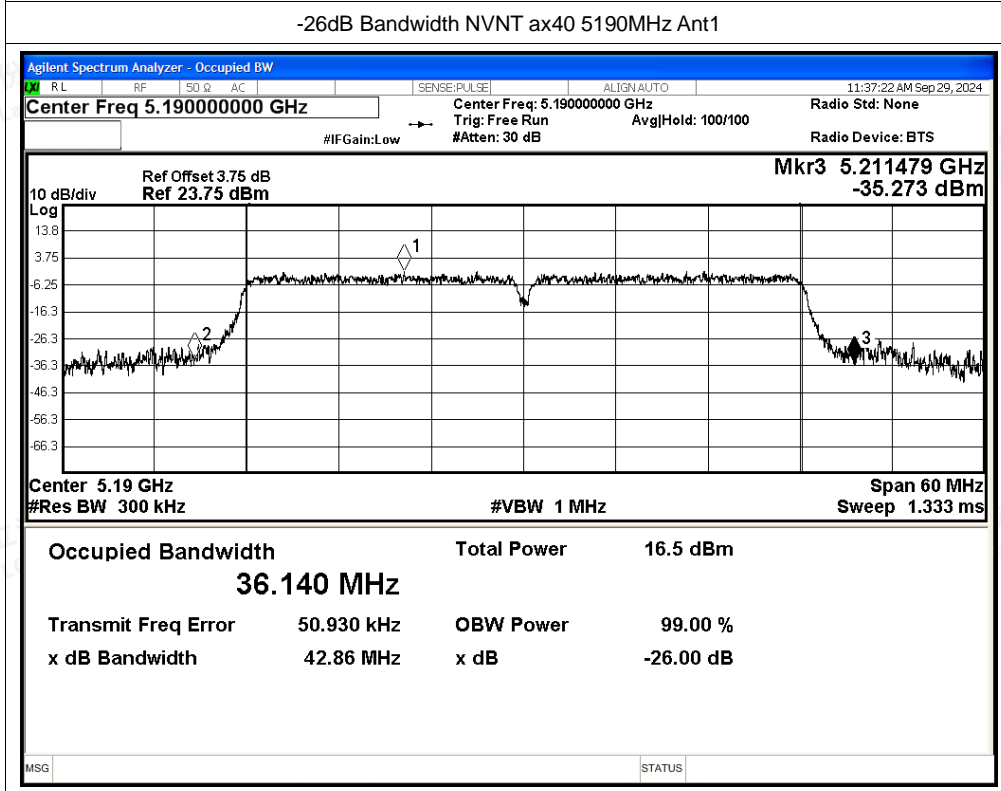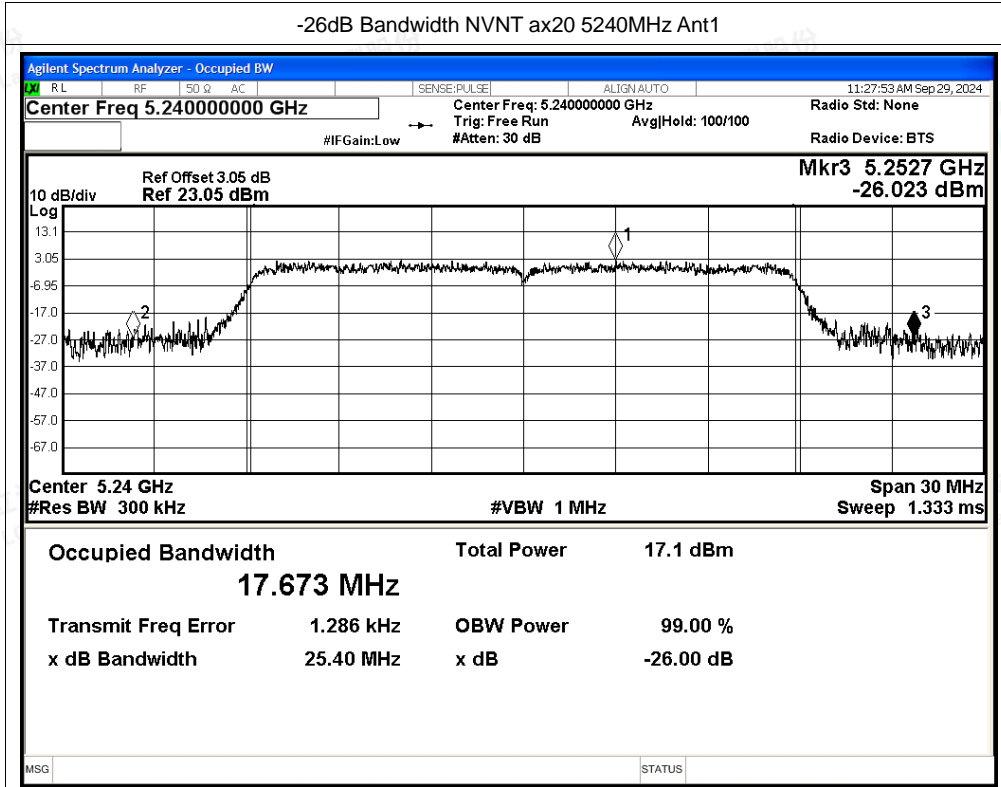

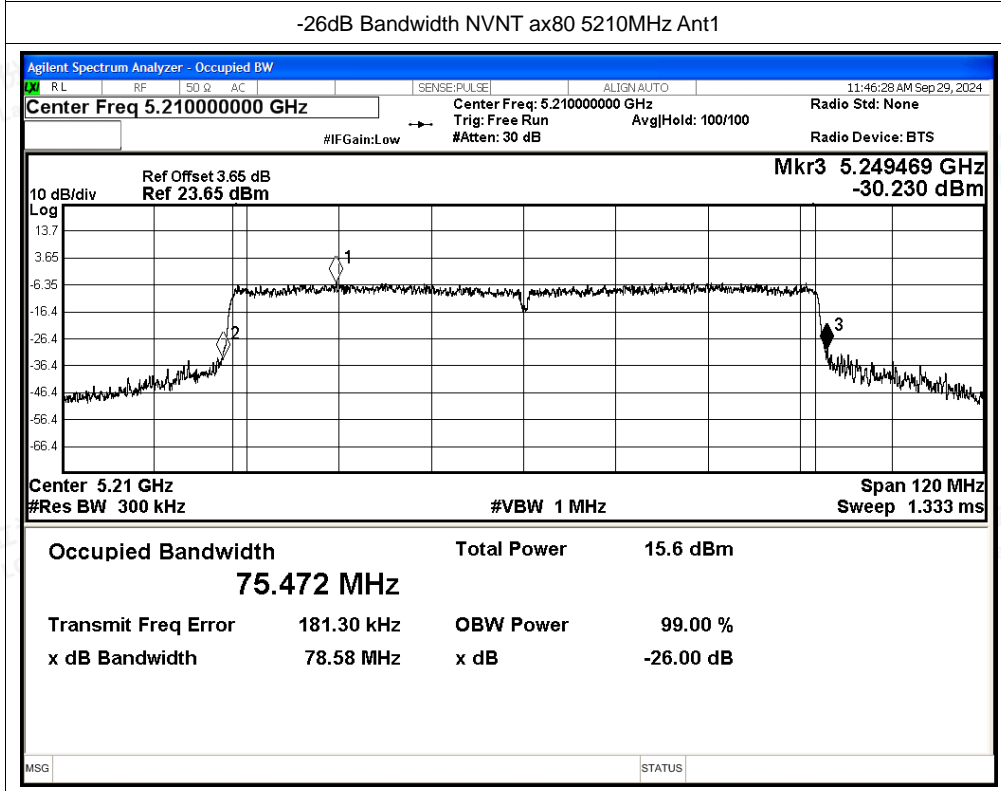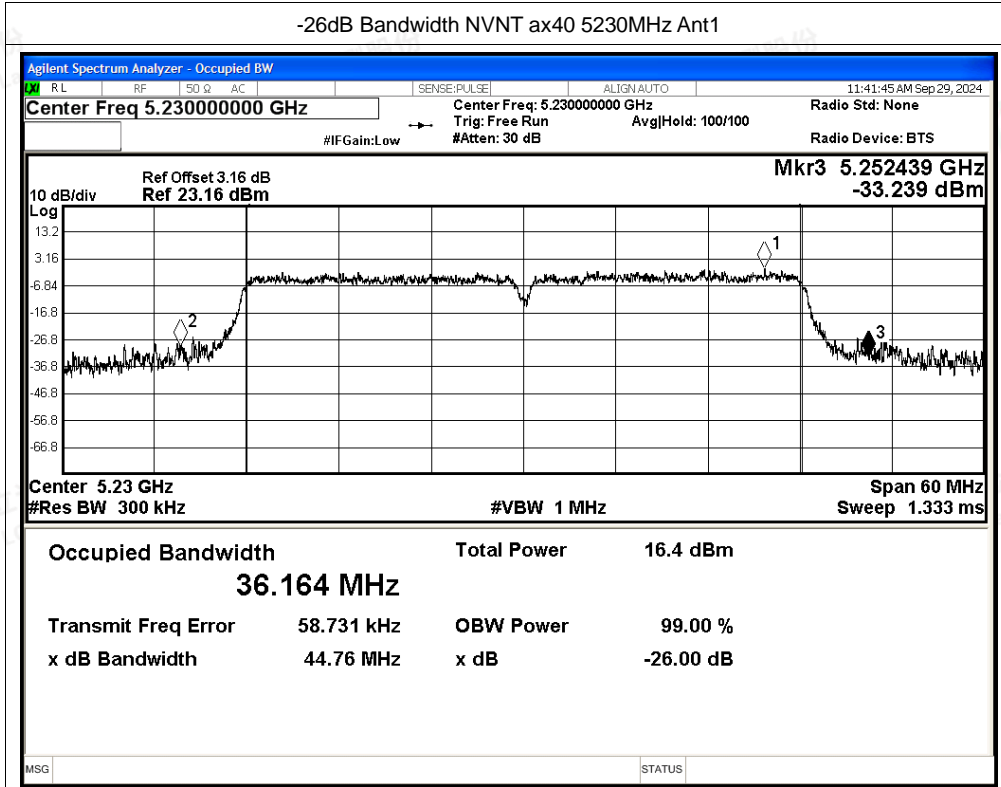



D.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	12.60	0.24	12.84	24	Pass
NVNT	a	5200	Ant0	12.48	0.24	12.72	24	Pass
NVNT	a	5240	Ant0	12.03	0.24	12.27	24	Pass
NVNT	n20	5180	Ant0	11.89	0.28	12.17	24	Pass
NVNT	n20	5200	Ant0	11.91	0.28	12.19	24	Pass
NVNT	n20	5240	Ant0	11.36	0.28	11.64	24	Pass
NVNT	n40	5190	Ant0	11.88	0.12	12.00	24	Pass
NVNT	n40	5230	Ant0	10.86	0.12	10.98	24	Pass
NVNT	ac20	5180	Ant0	11.84	0.28	12.12	24	Pass
NVNT	ac20	5200	Ant0	11.78	0.28	12.06	24	Pass
NVNT	ac20	5240	Ant0	11.10	0.28	11.38	24	Pass
NVNT	ac40	5190	Ant0	10.88	0.12	11.00	24	Pass
NVNT	ac40	5230	Ant0	10.85	0.12	10.97	24	Pass
NVNT	ac80	5210	Ant0	9.27	0.25	9.52	24	Pass
NVNT	ax20	5180	Ant0	11.97	0.28	12.25	24	Pass
NVNT	ax20	5200	Ant0	11.92	0.28	12.20	24	Pass
NVNT	ax20	5240	Ant0	11.50	0.28	11.78	24	Pass
NVNT	ax40	5190	Ant0	10.95	0.12	11.07	24	Pass
NVNT	ax40	5230	Ant0	10.82	0.12	10.94	24	Pass
NVNT	ax80	5210	Ant0	9.37	0.25	9.62	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	12.66	0.24	12.90	24	Pass
NVNT	a	5200	Ant1	12.52	0.24	12.76	24	Pass
NVNT	a	5240	Ant1	12.08	0.24	12.32	24	Pass
NVNT	n20	5180	Ant1	11.9	0.28	12.18	24	Pass
NVNT	n20	5200	Ant1	11.83	0.28	12.11	24	Pass
NVNT	n20	5240	Ant1	11.45	0.28	11.73	24	Pass
NVNT	n40	5190	Ant1	10.8	0.12	10.92	24	Pass
NVNT	n40	5230	Ant1	10.71	0.12	10.83	24	Pass
NVNT	ac20	5180	Ant1	11.95	0.28	12.23	24	Pass
NVNT	ac20	5200	Ant1	11.8	0.28	12.08	24	Pass
NVNT	ac20	5240	Ant1	11.4	0.28	11.68	24	Pass
NVNT	ac40	5190	Ant1	10.81	0.12	10.93	24	Pass
NVNT	ac40	5230	Ant1	10.78	0.12	10.90	24	Pass
NVNT	ac80	5210	Ant1	9.21	0.25	9.46	24	Pass
NVNT	ax20	5180	Ant1	11.95	0.28	12.23	24	Pass
NVNT	ax20	5200	Ant1	11.78	0.28	12.06	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NVNT	ax20	5240	Ant1	11.37	0.28	11.65	24	Pass
NVNT	ax40	5190	Ant1	10.86	0.12	10.98	24	Pass
NVNT	ax40	5230	Ant1	10.72	0.12	10.84	24	Pass
NVNT	ax80	5210	Ant1	9.24	0.25	9.49	24	Pass

MIMO

Condition	Mode	Frequency (MHz)	Antenna		Total Power (dBm)	Limit (dBm)	Verdict
			Ant0	Ant1			
NVNT	n20	5180	12.17	12.18	15.19	30	Pass
NVNT	n20	5200	12.19	12.11	15.16	30	Pass
NVNT	n20	5240	11.64	11.73	14.70	30	Pass
NVNT	n40	5190	12.00	10.92	14.50	30	Pass
NVNT	n40	5230	10.98	10.83	13.92	30	Pass
NVNT	ac20	5180	12.12	12.23	15.19	30	Pass
NVNT	ac20	5200	12.06	12.08	15.08	30	Pass
NVNT	ac20	5240	11.38	11.68	14.54	30	Pass
NVNT	ac40	5190	11.00	10.93	13.98	30	Pass
NVNT	ac40	5230	10.97	10.90	13.95	30	Pass
NVNT	ac80	5210	9.52	9.46	12.50	30	Pass
NVNT	ax20	5180	12.25	12.23	15.25	30	Pass
NVNT	ax20	5200	12.20	12.06	15.14	30	Pass
NVNT	ax20	5240	11.78	11.65	14.73	30	Pass
NVNT	ax40	5190	11.07	10.98	14.04	30	Pass
NVNT	ax40	5230	10.94	10.84	13.90	30	Pass
NVNT	ax80	5210	9.62	9.49	12.57	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



D.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant0	2.26	0.24	2.50	11	Pass
NVNT	a	5200	Ant0	1.95	0.24	2.19	11	Pass
NVNT	a	5240	Ant0	1.57	0.24	1.81	11	Pass
NVNT	n20	5180	Ant0	1.44	0.28	1.72	11	Pass
NVNT	n20	5200	Ant0	1.22	0.28	1.50	11	Pass
NVNT	n20	5240	Ant0	0.39	0.28	0.67	11	Pass
NVNT	n40	5190	Ant0	-2.17	0.12	-2.05	11	Pass
NVNT	n40	5230	Ant0	-2.8	0.12	-2.68	11	Pass
NVNT	ac20	5180	Ant0	1.14	0.28	1.42	11	Pass
NVNT	ac20	5200	Ant0	0.91	0.28	1.19	11	Pass
NVNT	ac20	5240	Ant0	0.32	0.28	0.60	11	Pass
NVNT	ac40	5190	Ant0	-3.12	0.12	-3.00	11	Pass
NVNT	ac40	5230	Ant0	-2.52	0.12	-2.40	11	Pass
NVNT	ac80	5210	Ant0	-7.27	0.25	-7.02	11	Pass
NVNT	ax20	5180	Ant0	1.22	0.28	1.50	11	Pass
NVNT	ax20	5200	Ant0	1.06	0.28	1.34	11	Pass
NVNT	ax20	5240	Ant0	0.86	0.28	1.14	11	Pass
NVNT	ax40	5190	Ant0	-2.93	0.12	-2.81	11	Pass
NVNT	ax40	5230	Ant0	-3.06	0.12	-2.94	11	Pass
NVNT	ax80	5210	Ant0	-7.34	0.25	-7.09	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	2.44	0.24	2.68	11	Pass
NVNT	a	5200	Ant1	1.81	0.24	2.05	11	Pass
NVNT	a	5240	Ant1	1.33	0.24	1.57	11	Pass
NVNT	n20	5180	Ant1	1.28	0.28	1.56	11	Pass
NVNT	n20	5200	Ant1	1.34	0.28	1.62	11	Pass
NVNT	n20	5240	Ant1	0.68	0.28	0.96	11	Pass
NVNT	n40	5190	Ant1	-3.09	0.12	-2.97	11	Pass
NVNT	n40	5230	Ant1	-2.89	0.12	-2.77	11	Pass
NVNT	ac20	5180	Ant1	1.27	0.28	1.55	11	Pass
NVNT	ac20	5200	Ant1	1.24	0.28	1.52	11	Pass
NVNT	ac20	5240	Ant1	0.61	0.28	0.89	11	Pass
NVNT	ac40	5190	Ant1	-2.95	0.12	-2.83	11	Pass
NVNT	ac40	5230	Ant1	-2.71	0.12	-2.59	11	Pass
NVNT	ac80	5210	Ant1	-7.25	0.25	-7.00	11	Pass
NVNT	ax20	5180	Ant1	1.26	0.28	1.54	11	Pass
NVNT	ax20	5200	Ant1	1.04	0.28	1.32	11	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NVNT	ax20	5240	Ant1	0.55	0.28	0.83	11	Pass
NVNT	ax40	5190	Ant1	-3.06	0.12	-2.94	11	Pass
NVNT	ax40	5230	Ant1	-2.89	0.12	-2.77	11	Pass
NVNT	ax80	5210	Ant1	-6.74	0.25	-6.49	11	Pass

MIMO

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)		Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
			Duty Factor (dB)				
			Ant0	Ant1			
NVNT	n20	5180	1.72	1.56	4.65	11	Pass
NVNT	n20	5200	1.50	1.62	4.57	11	Pass
NVNT	n20	5240	0.67	0.96	3.83	11	Pass
NVNT	n40	5190	-2.05	-2.97	0.52	11	Pass
NVNT	n40	5230	-2.68	-2.77	0.29	11	Pass
NVNT	ac20	5180	1.42	1.55	4.50	11	Pass
NVNT	ac20	5200	1.19	1.52	4.37	11	Pass
NVNT	ac20	5240	0.60	0.89	3.76	11	Pass
NVNT	ac40	5190	-3.00	-2.83	0.10	11	Pass
NVNT	ac40	5230	-2.40	-2.59	0.52	11	Pass
NVNT	ac80	5210	-7.02	-7.00	-4.00	11	Pass
NVNT	ax20	5180	1.50	1.54	4.53	11	Pass
NVNT	ax20	5200	1.34	1.32	4.34	11	Pass
NVNT	ax20	5240	1.14	0.83	4.00	11	Pass
NVNT	ax40	5190	-2.81	-2.94	0.14	11	Pass
NVNT	ax40	5230	-2.94	-2.77	0.16	11	Pass
NVNT	ax80	5210	-7.09	-6.49	-3.77	11	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity






Test Graphs



PSD NVNT a 5180MHz Ant0


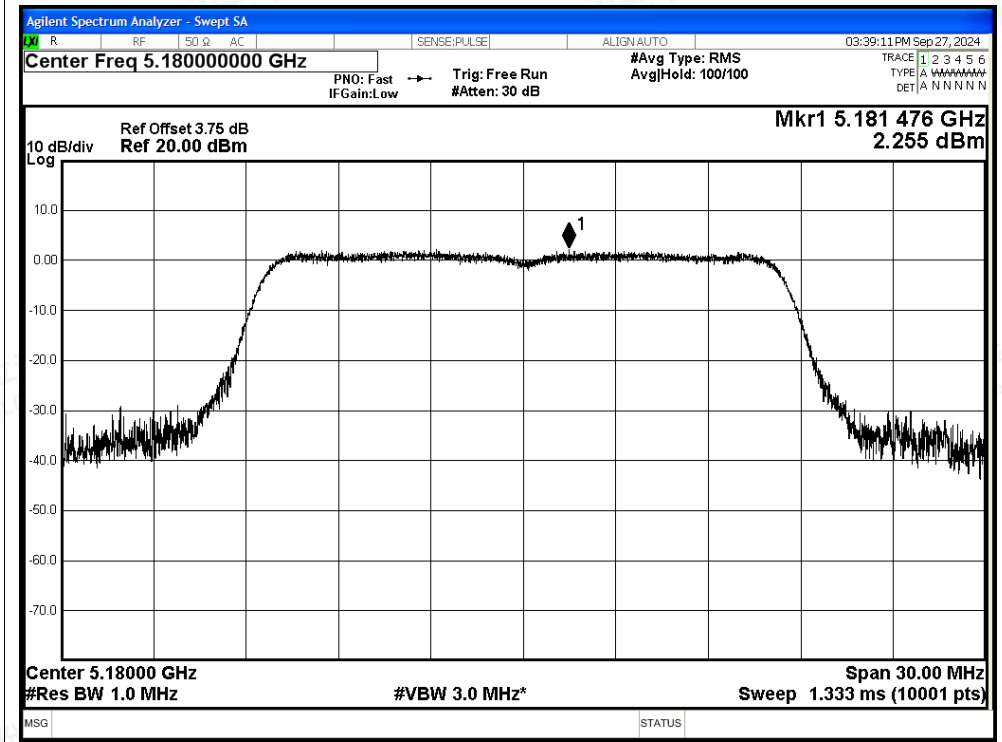




PSD NVNT a 5200MHz Ant0


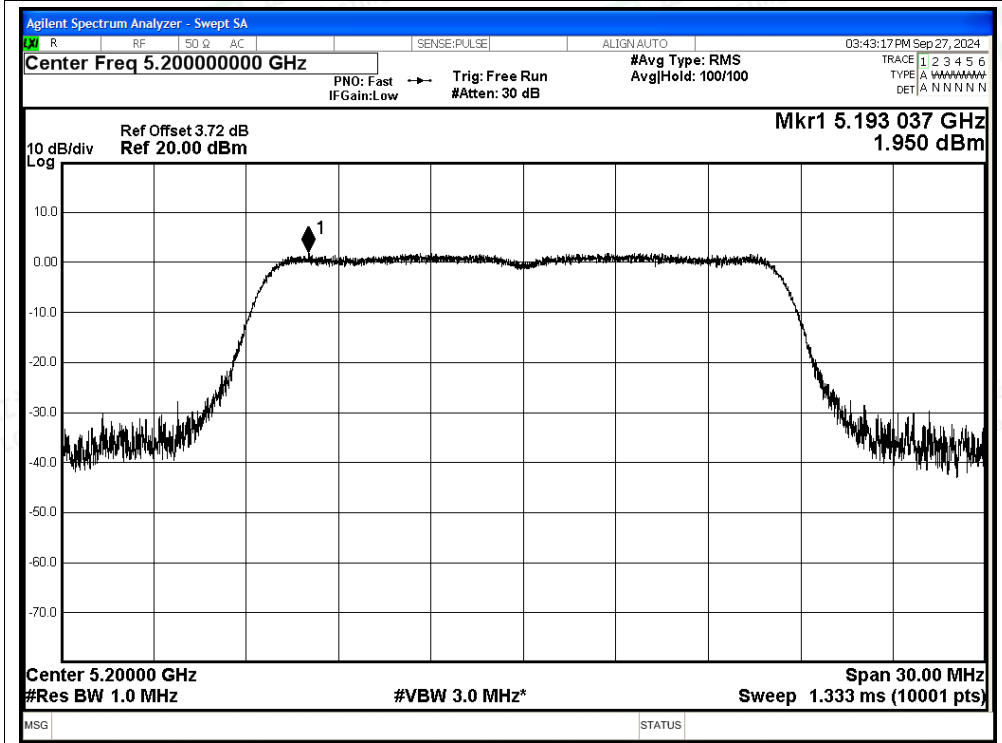


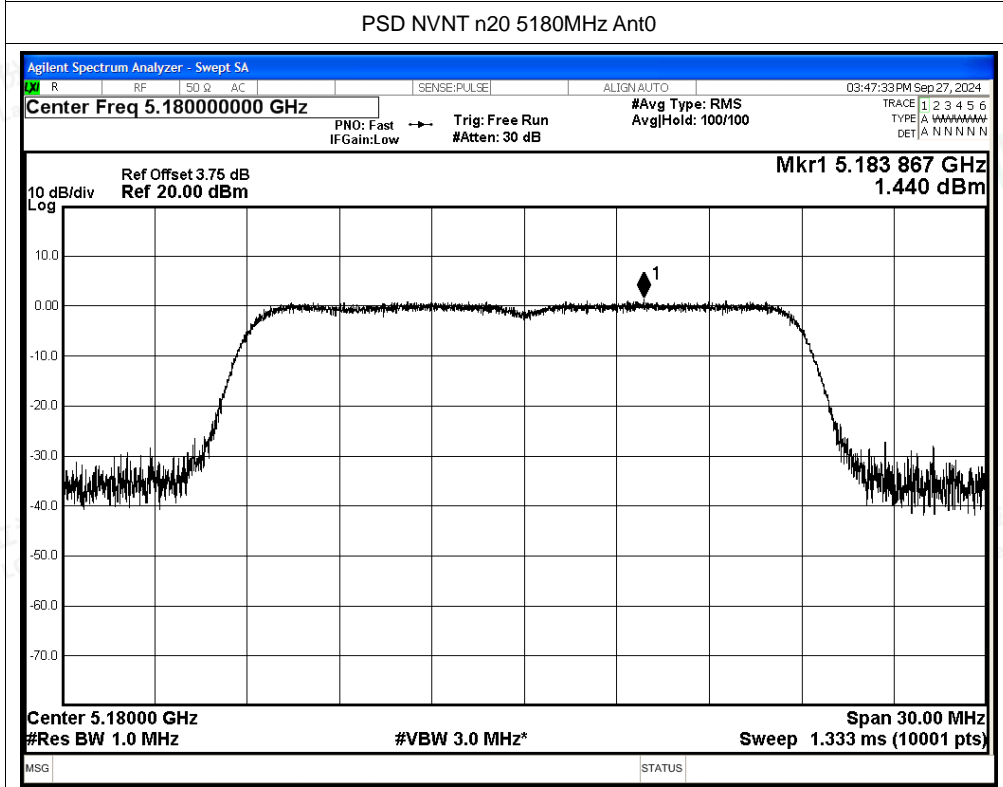
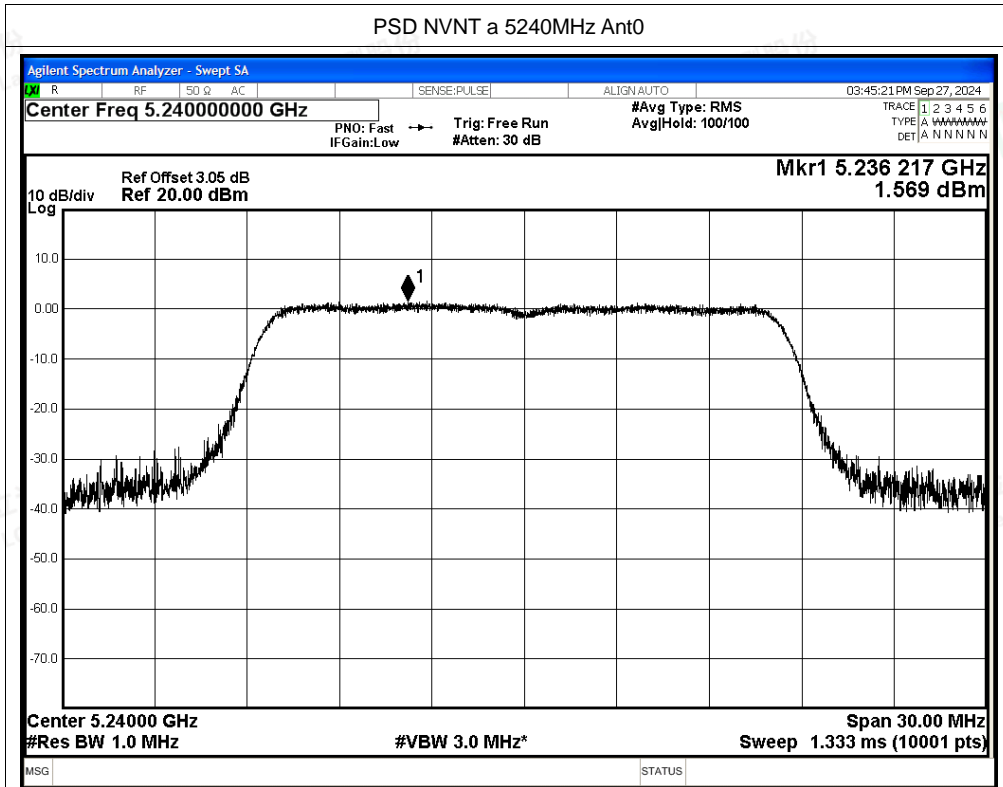


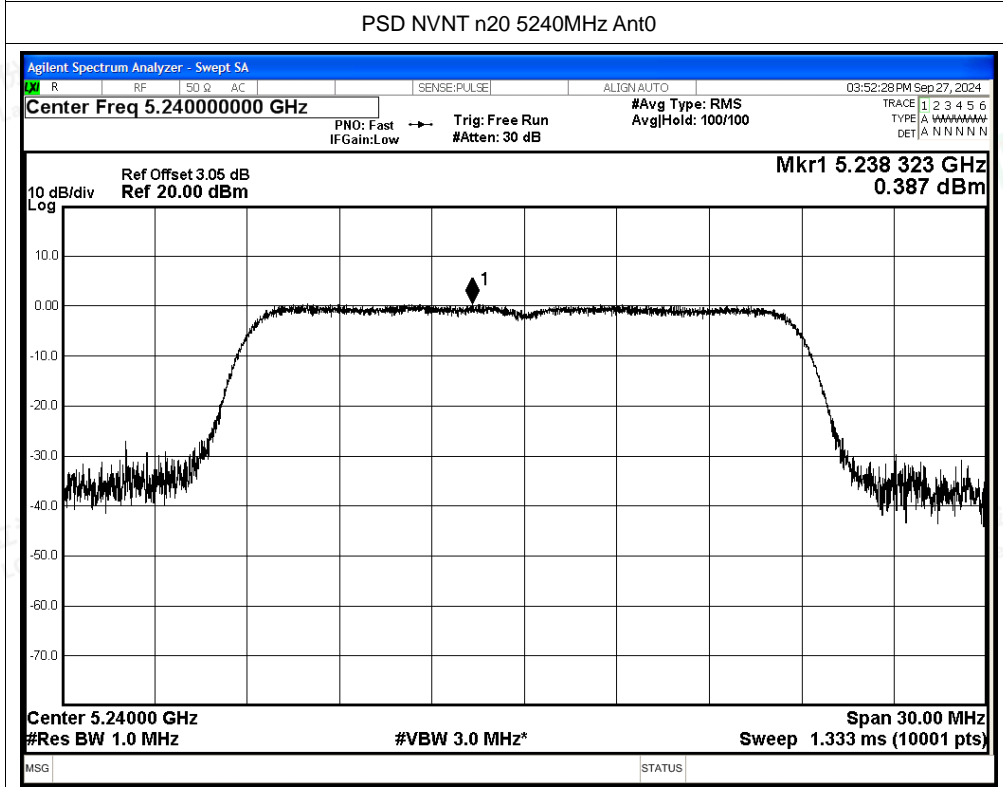
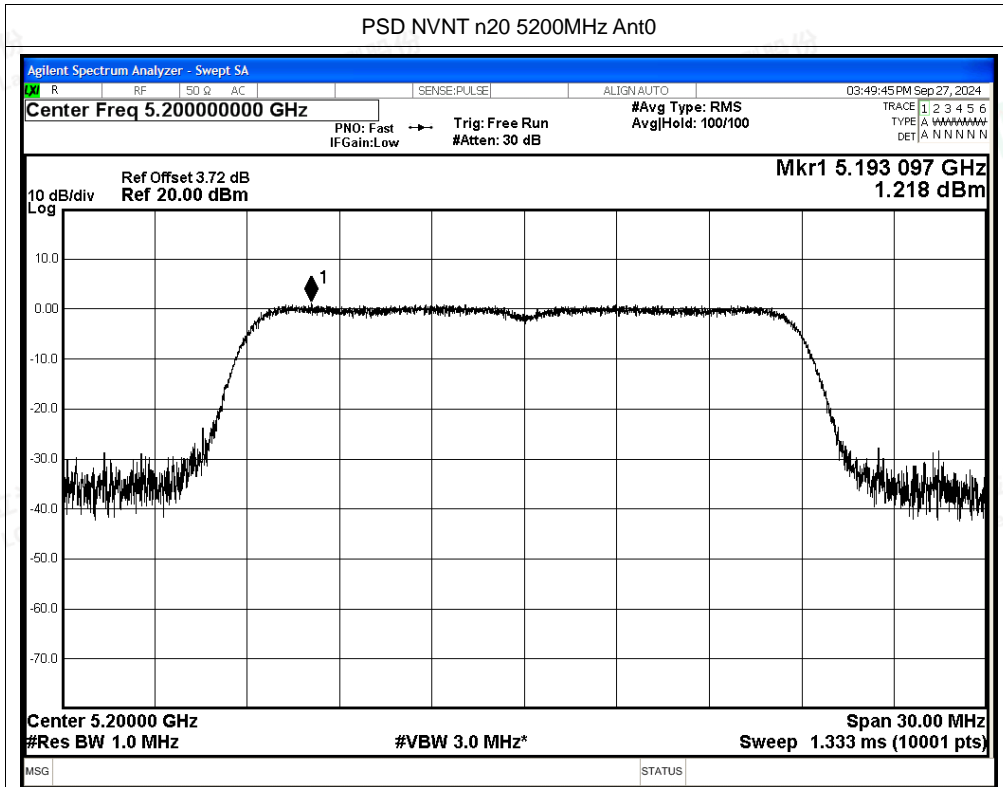


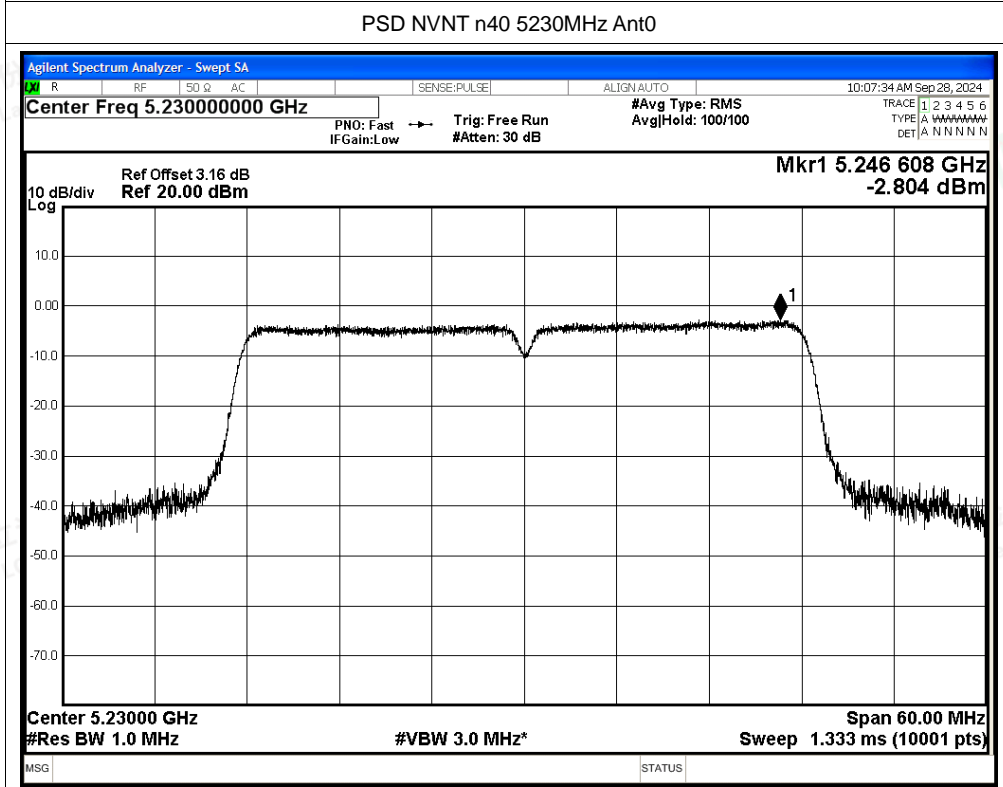
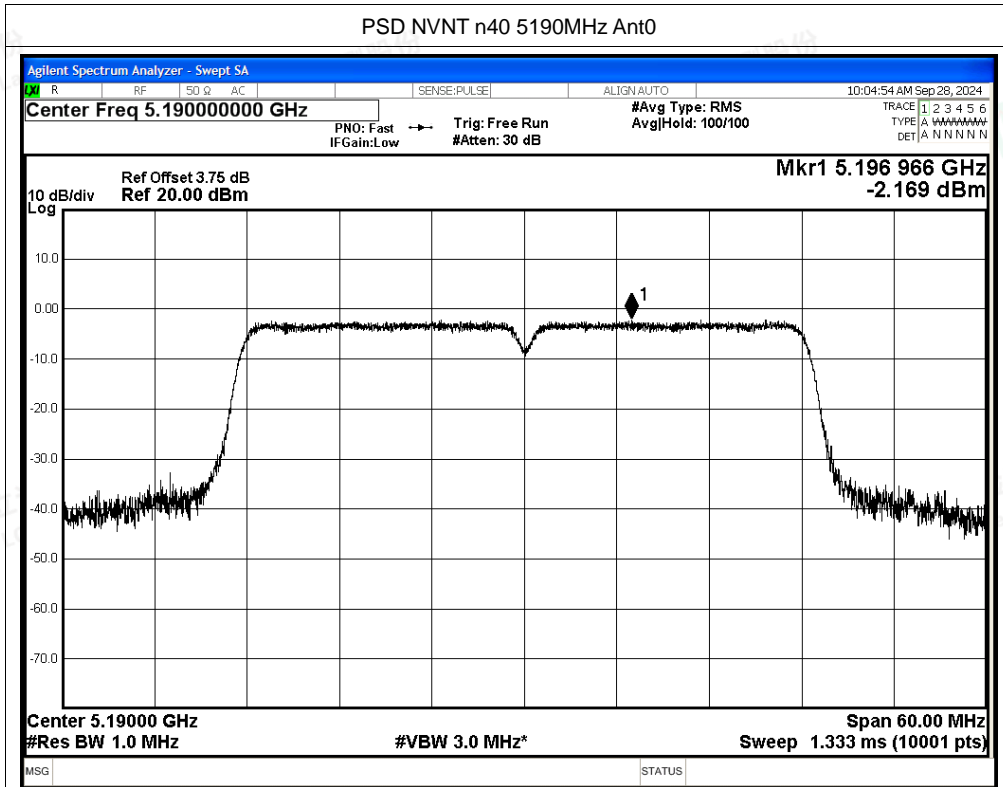


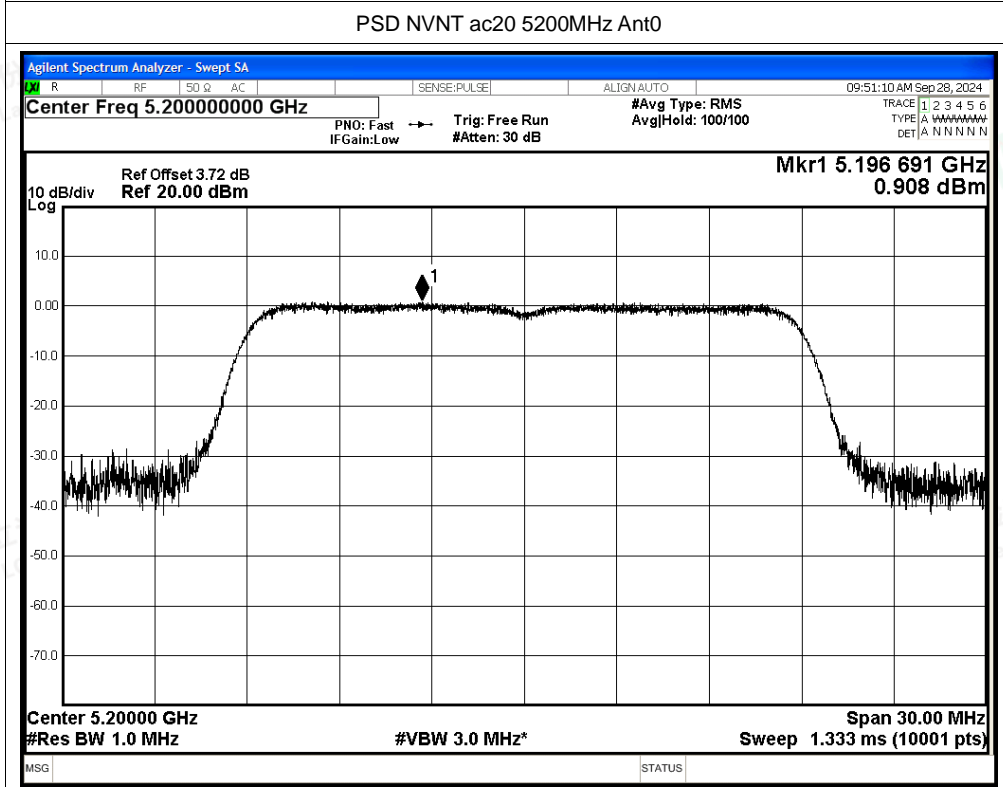
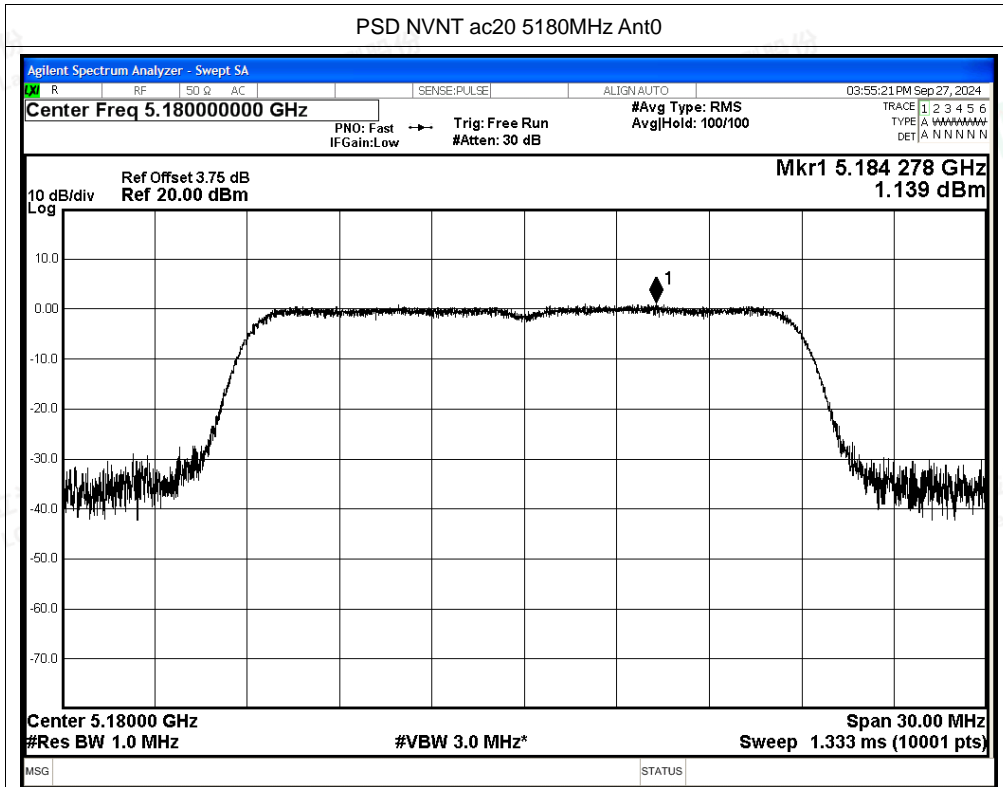


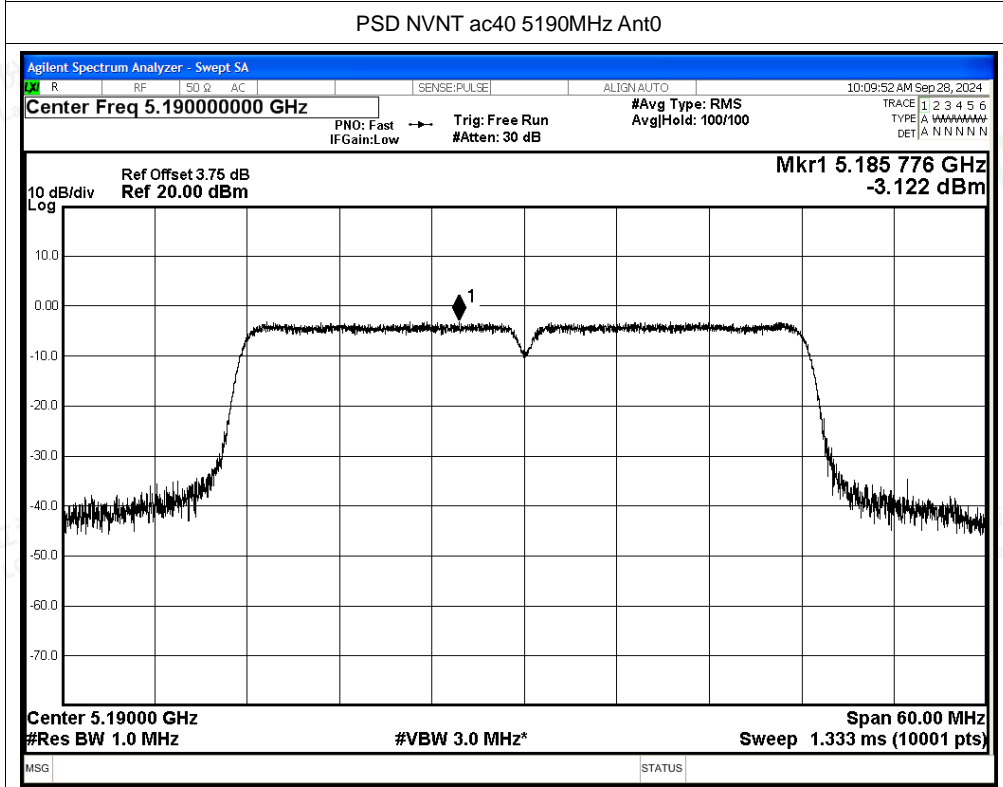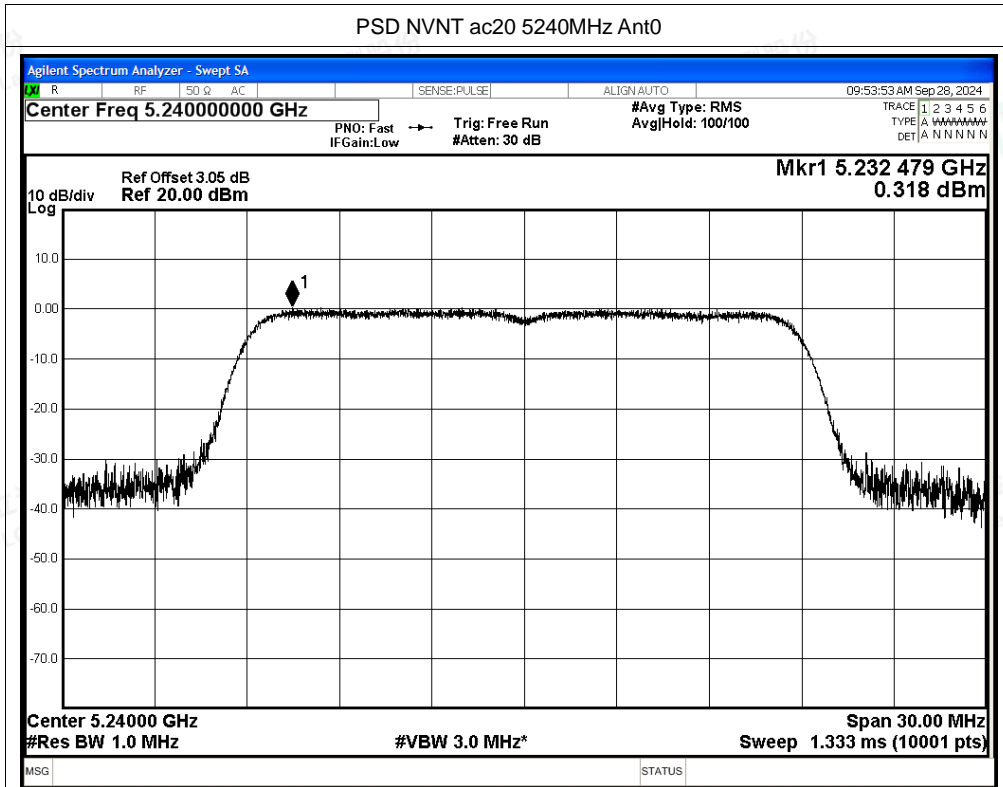

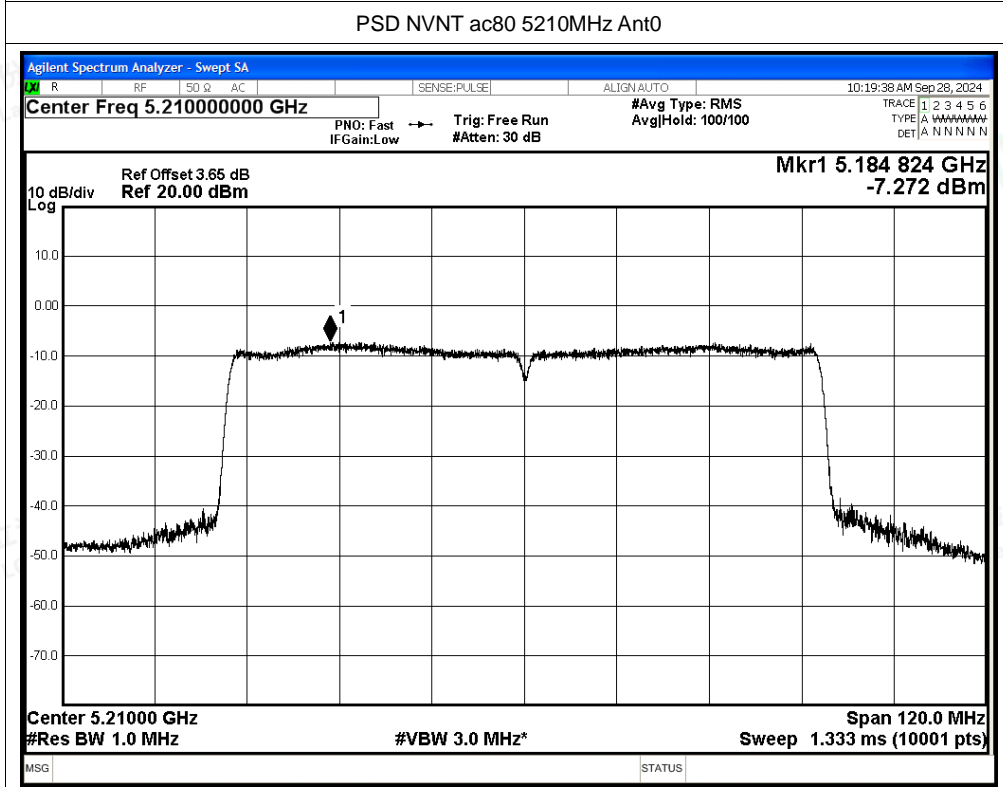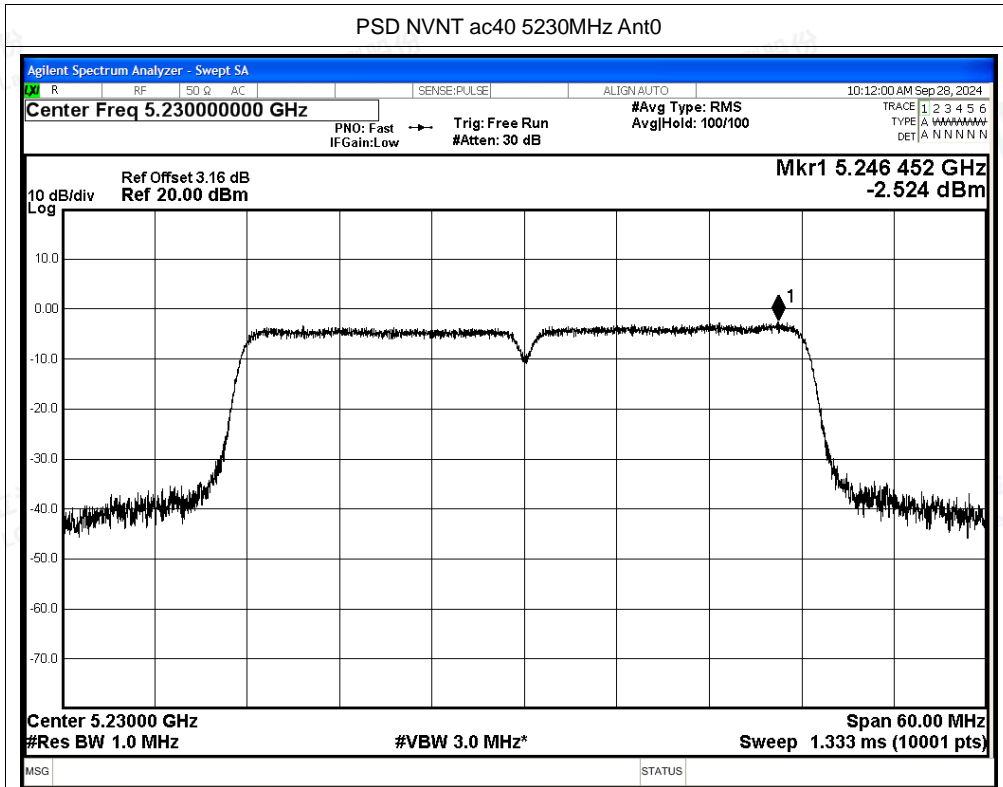

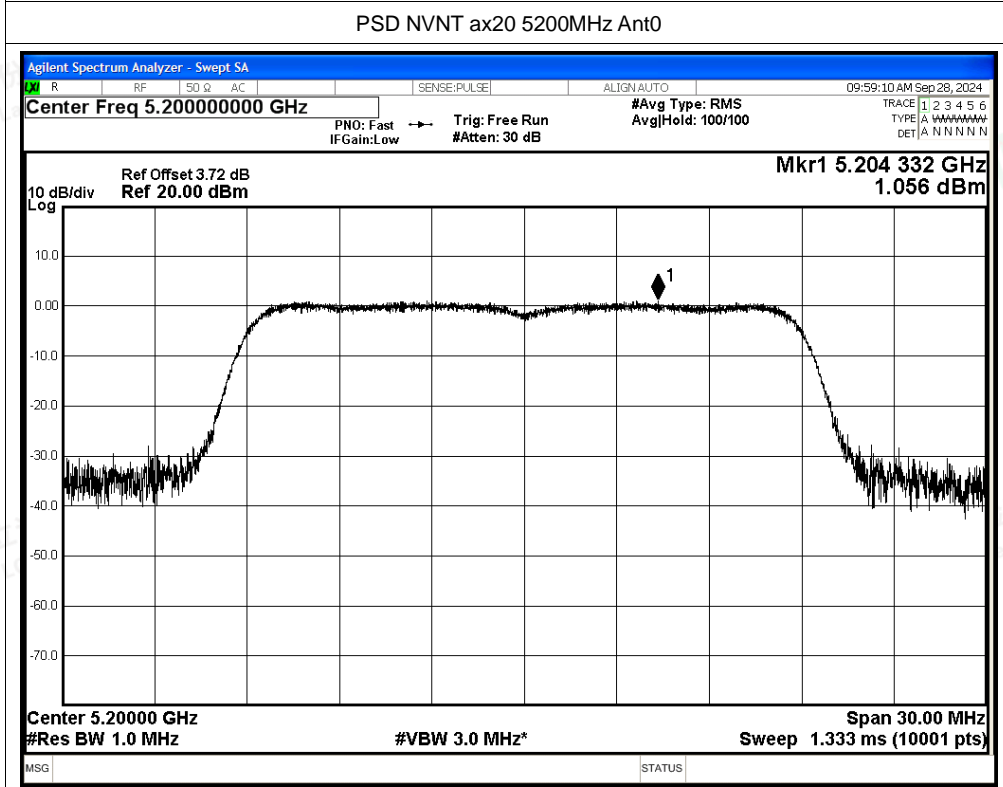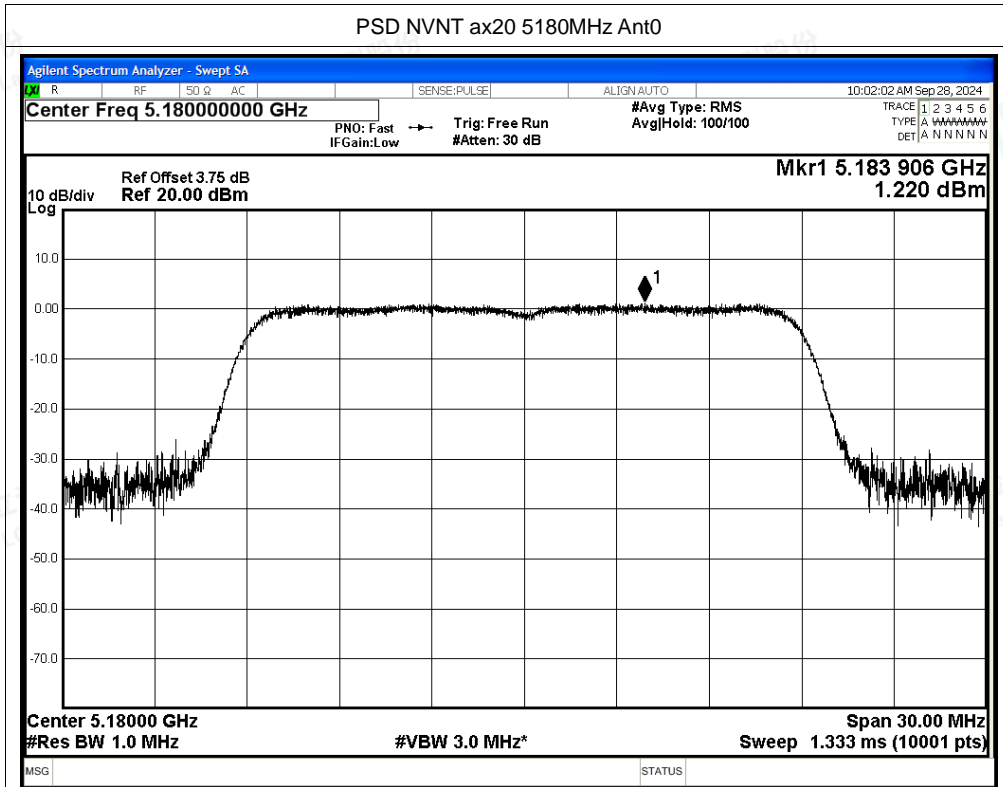

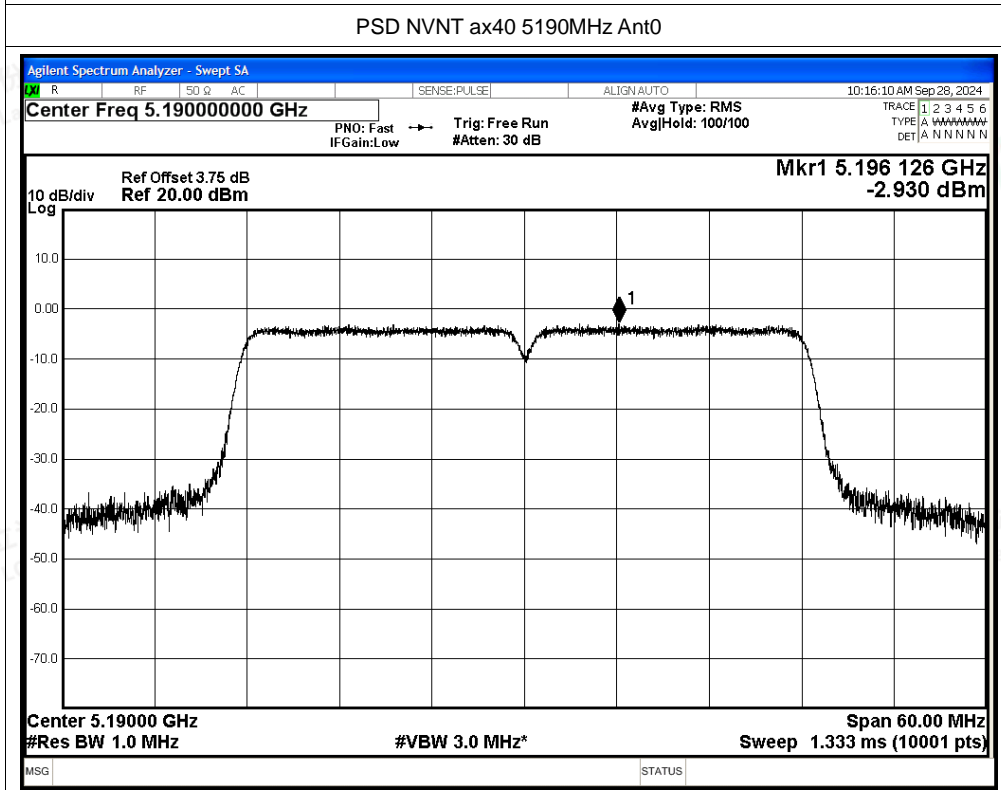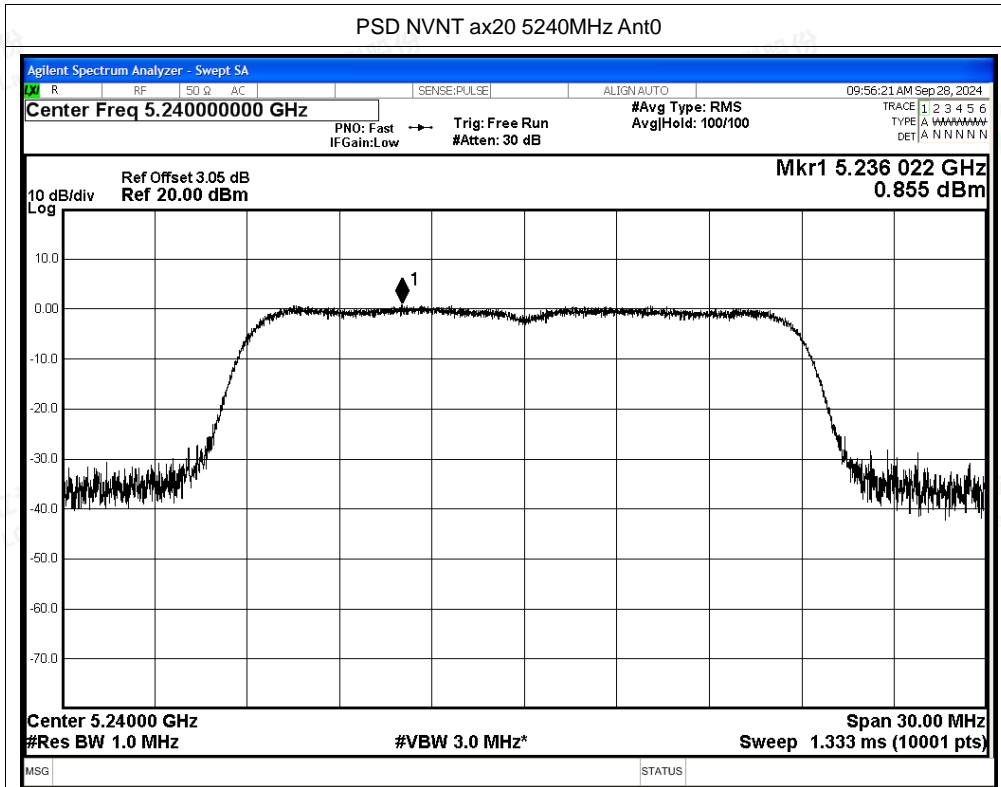


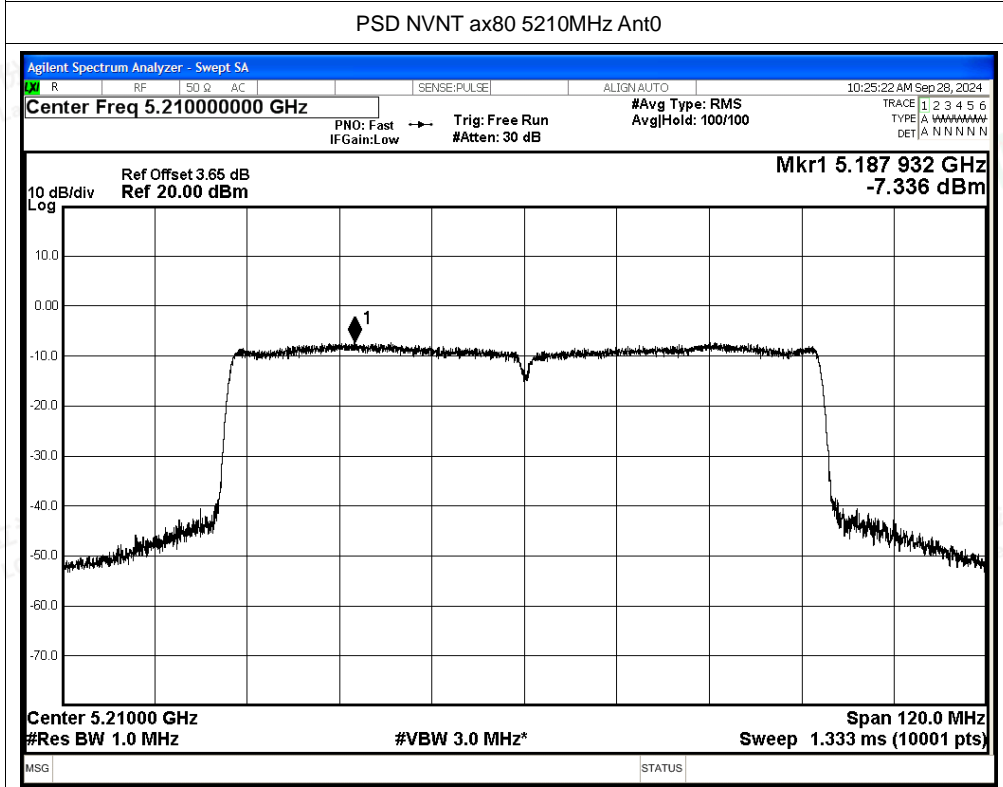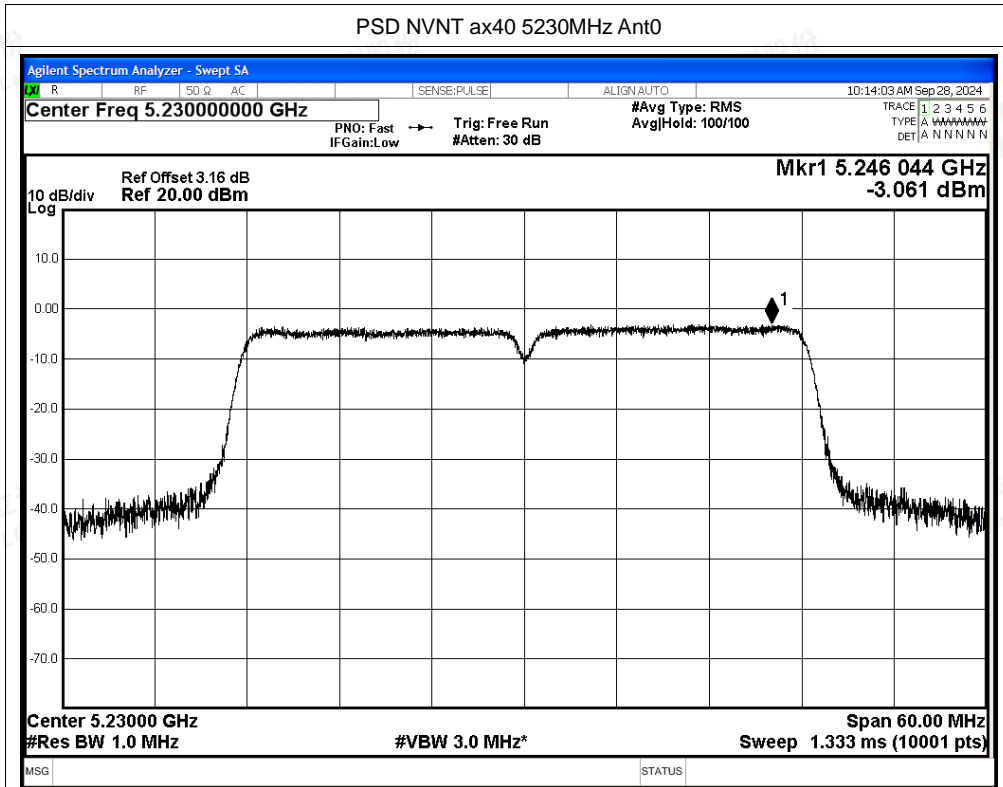




Test Graphs

PSD NVNT a 5180MHz Ant1

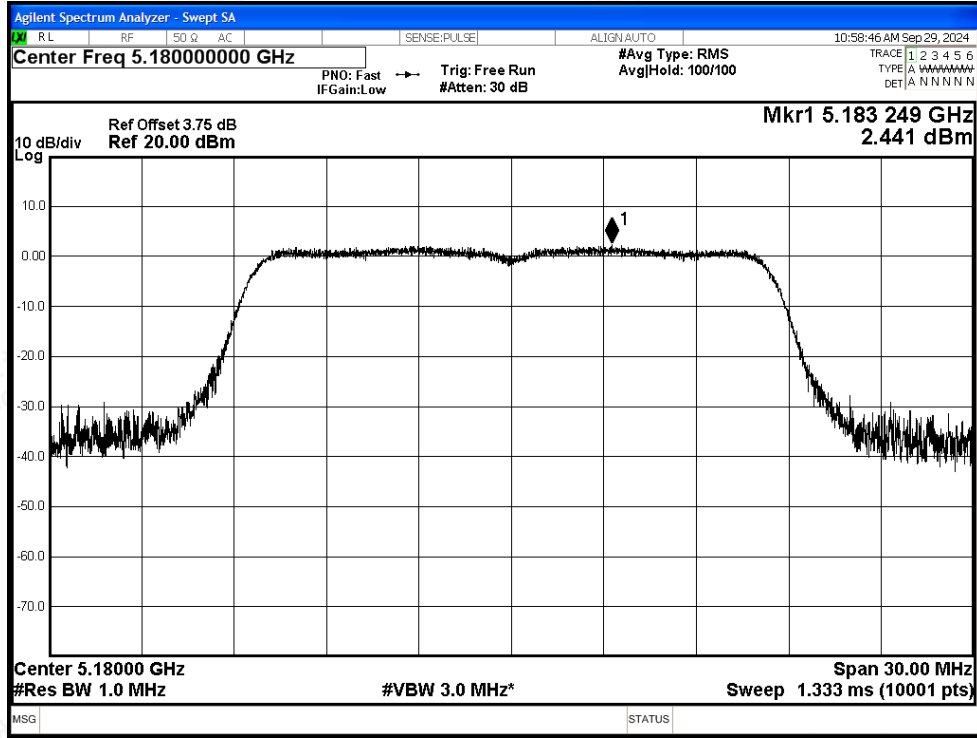


PSD NVNT a 5200MHz Ant1

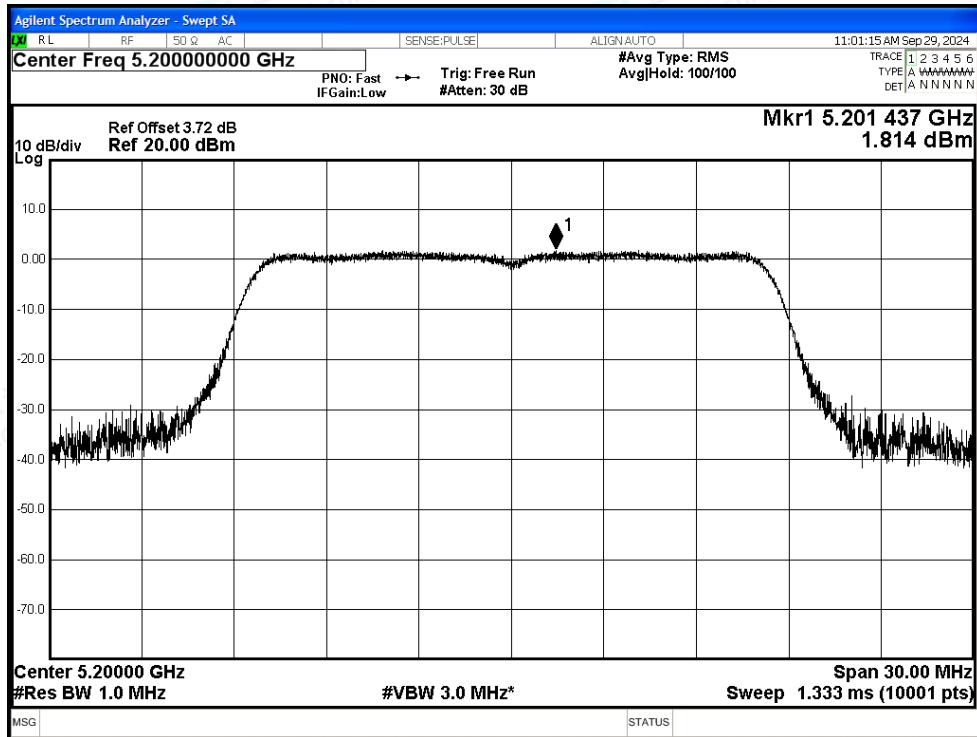








PSD NVNT a 5240MHz Ant1


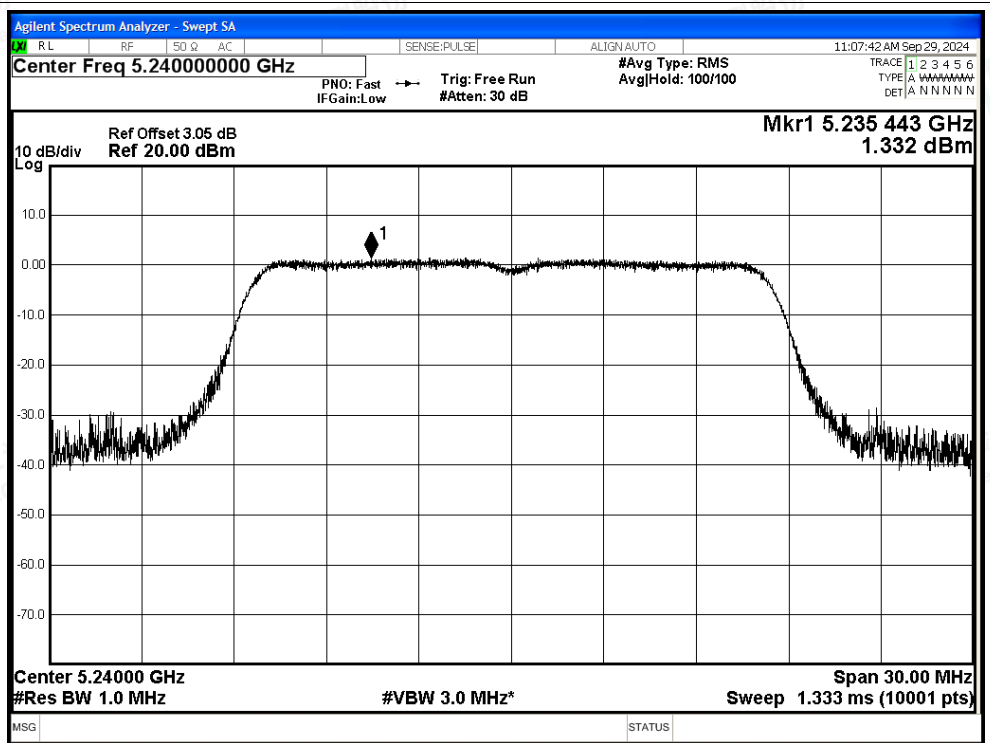




PSD NVNT n20 5180MHz Ant1


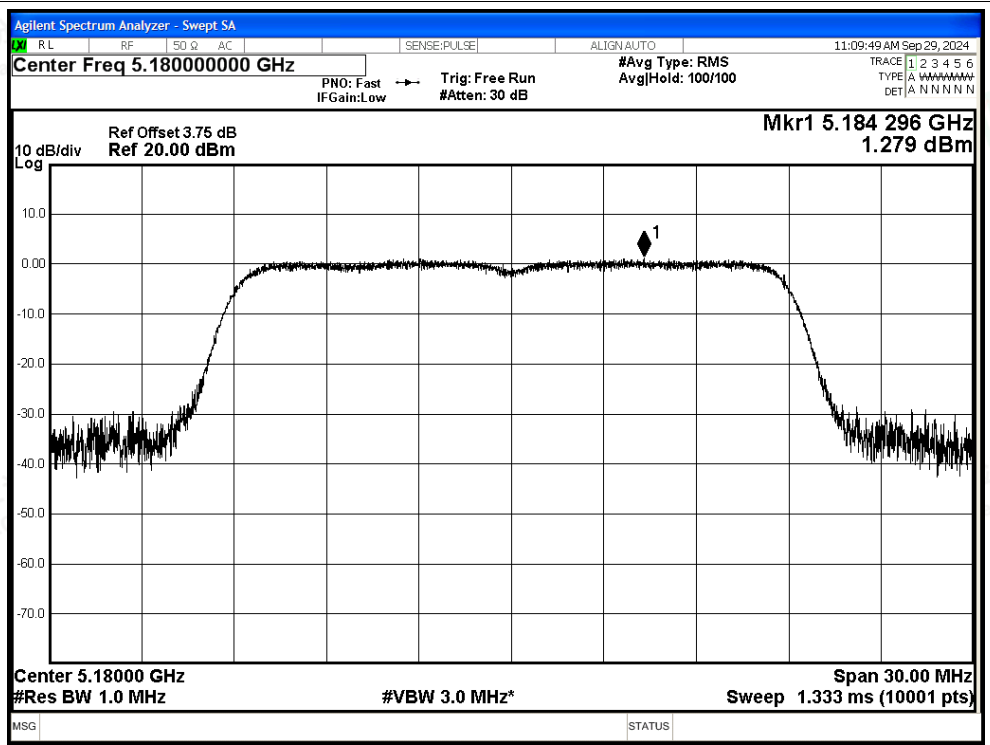


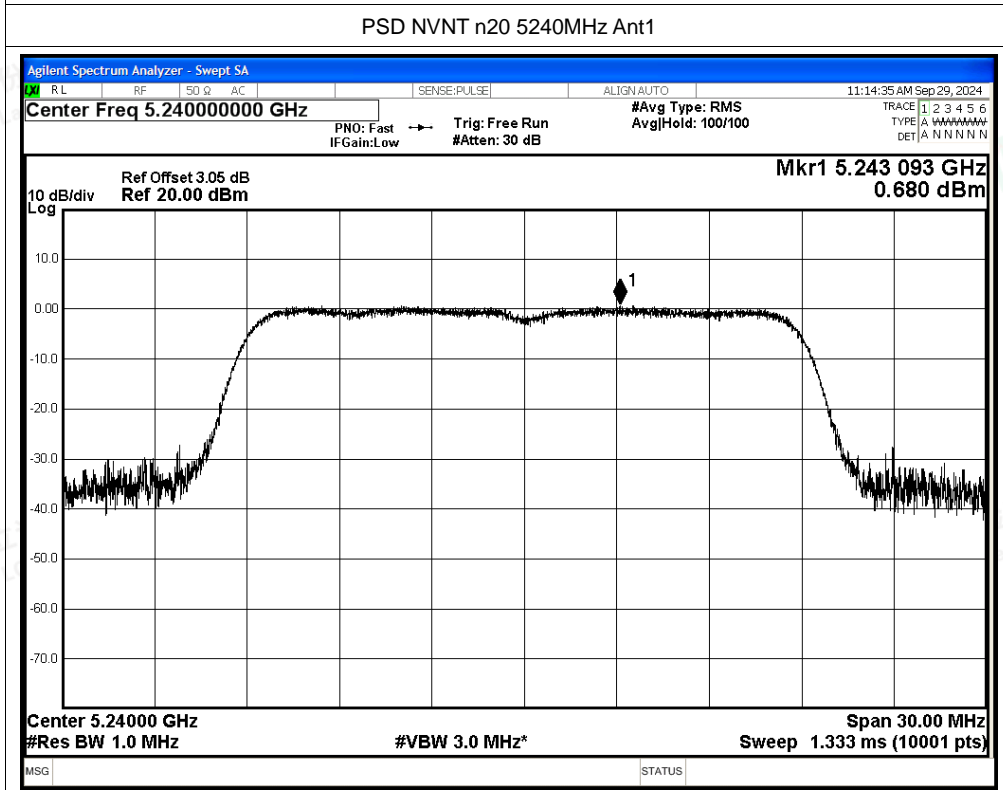
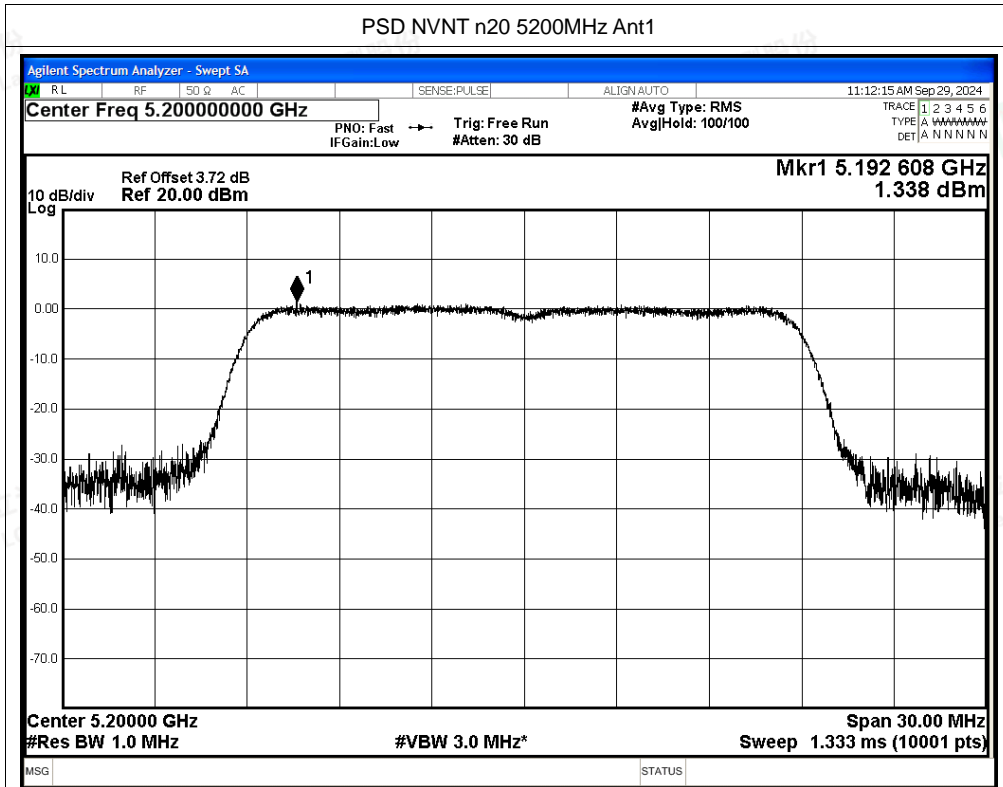


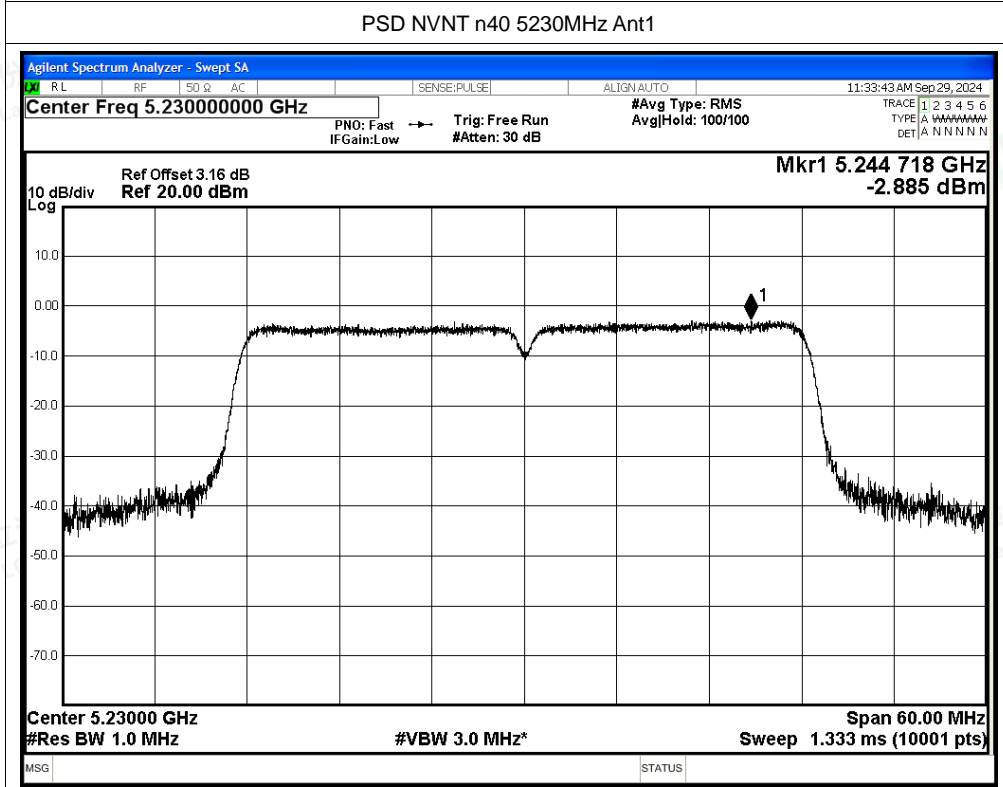
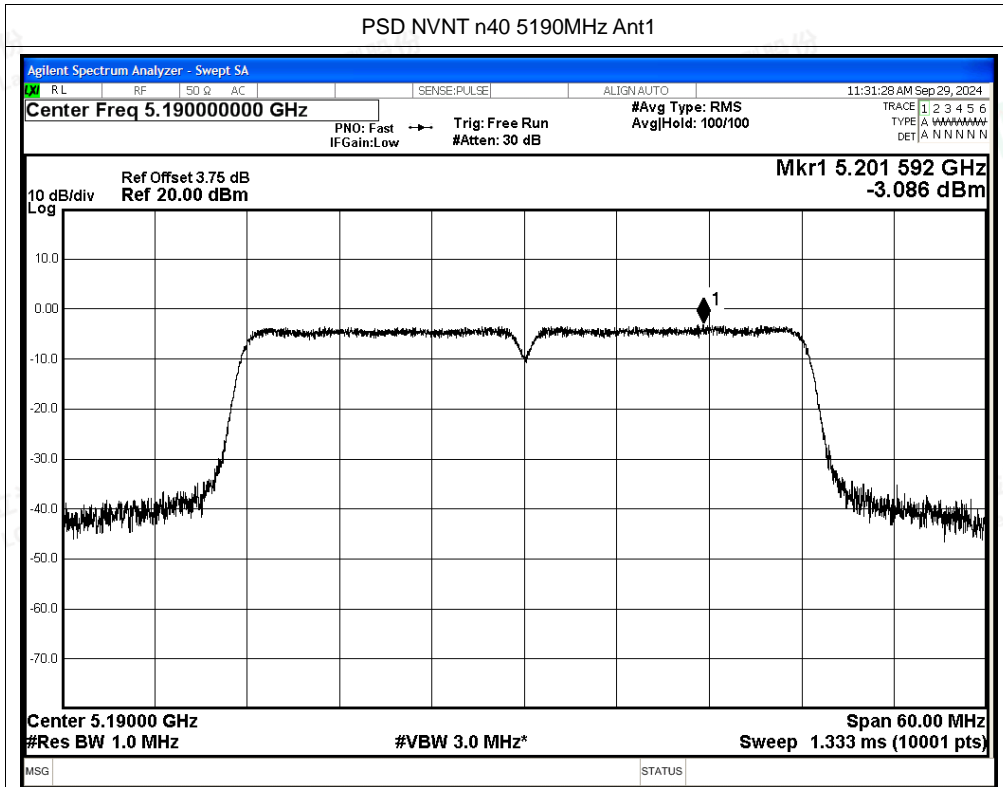


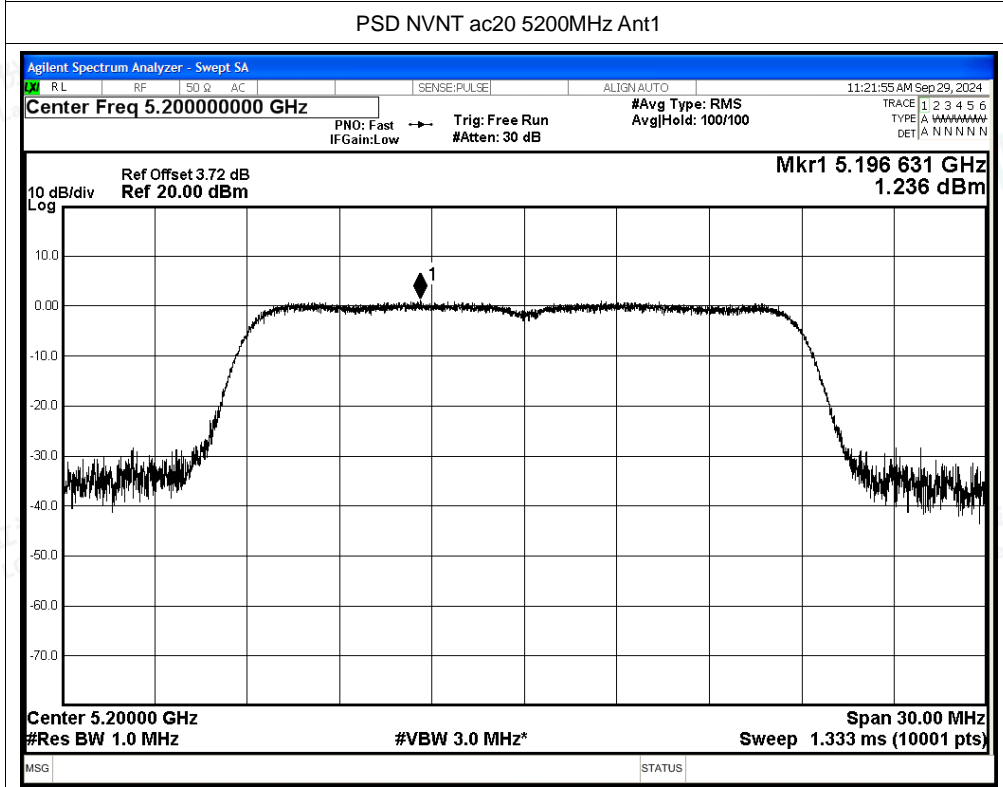
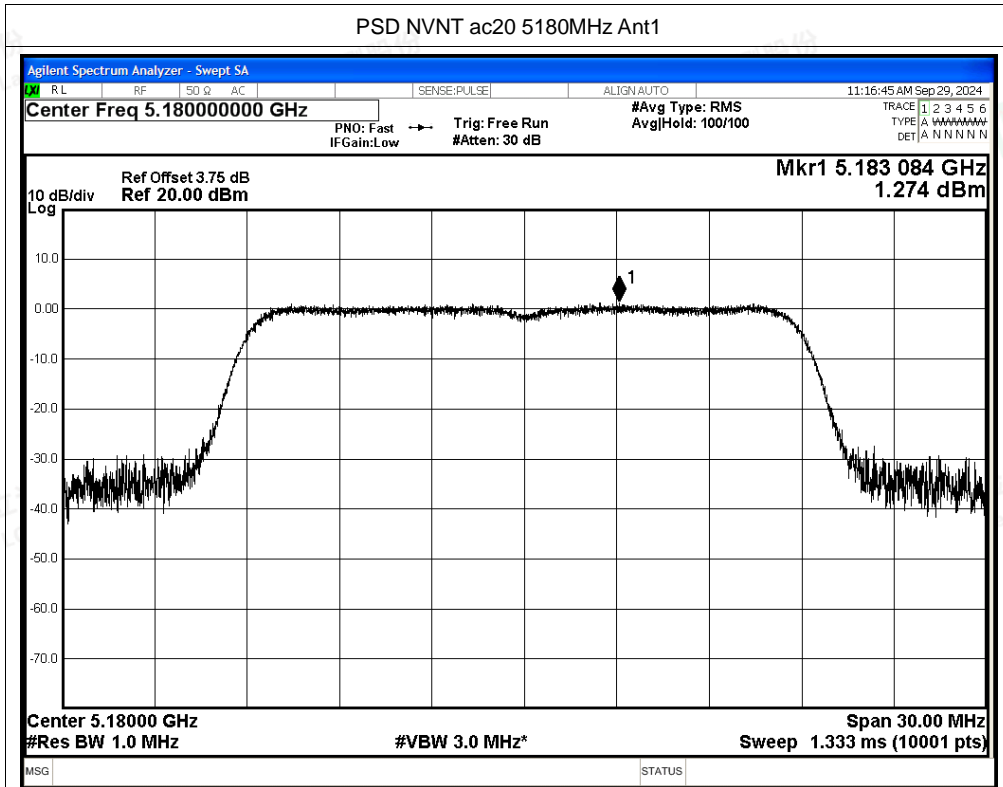


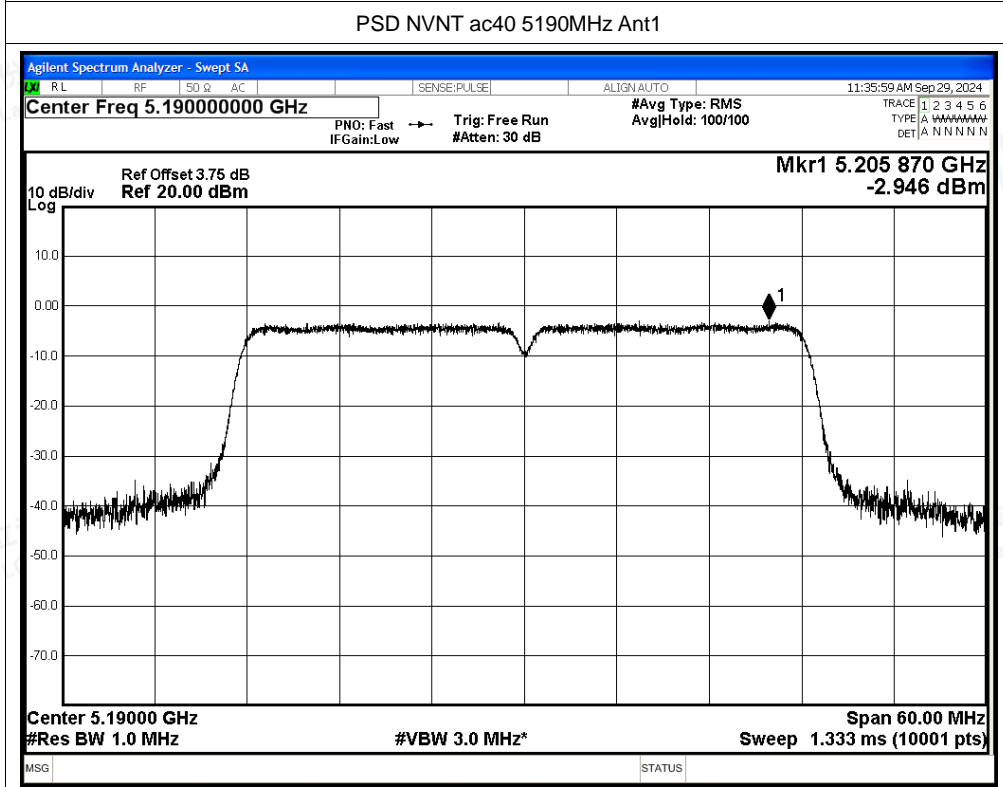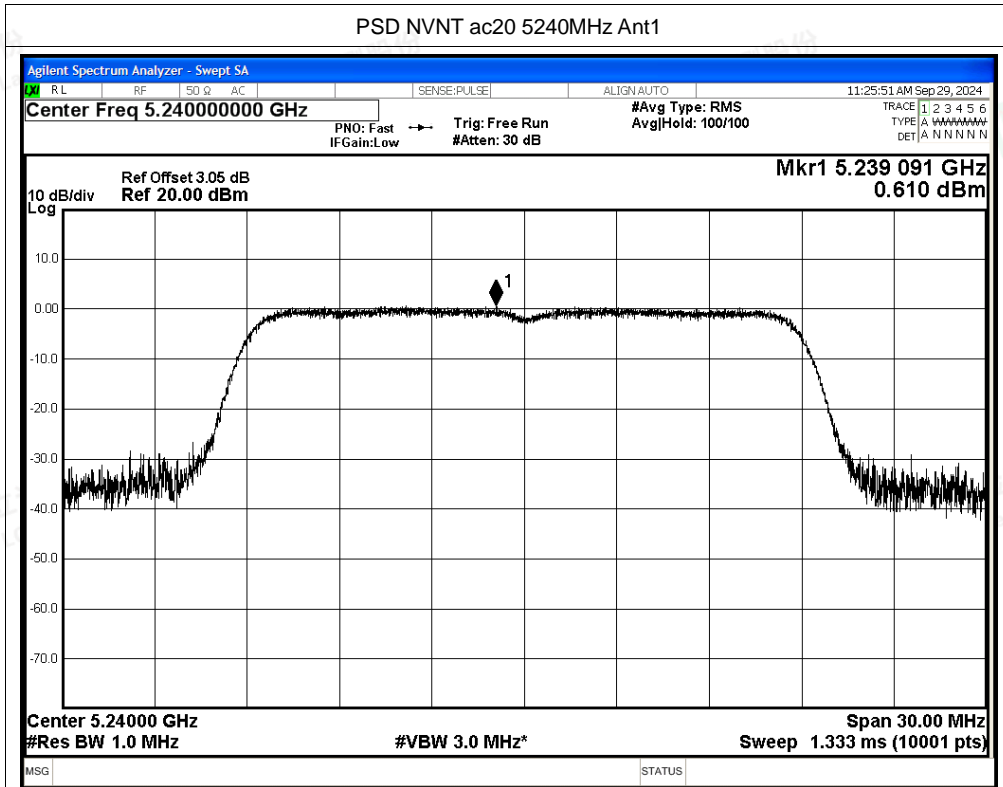

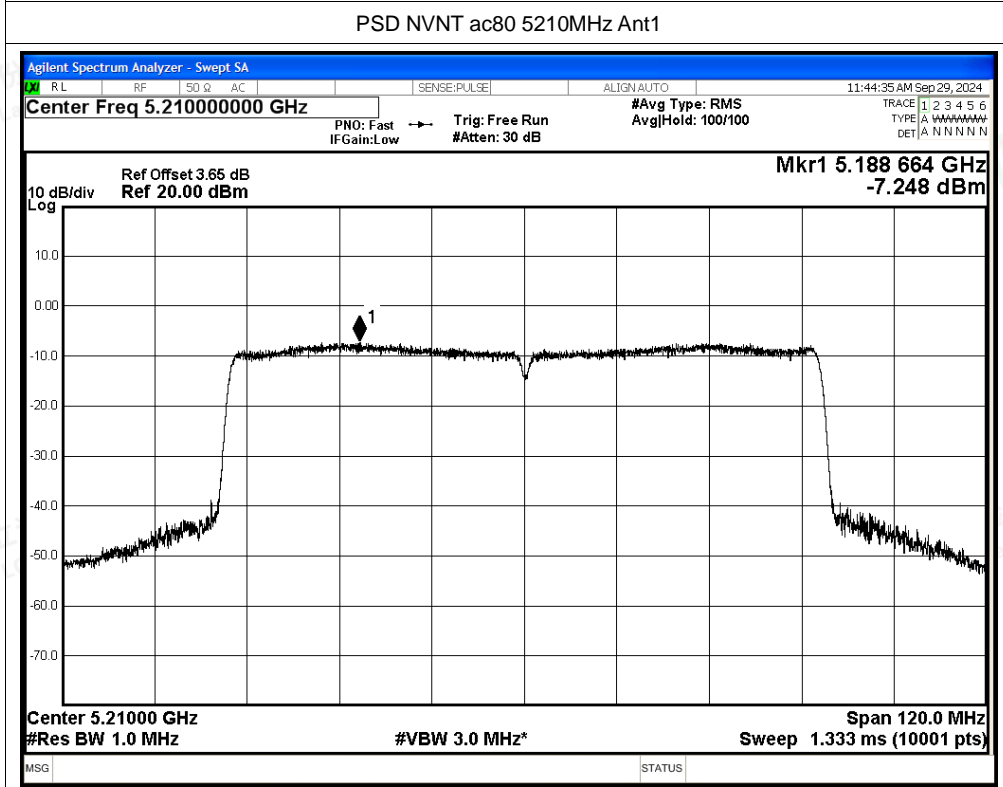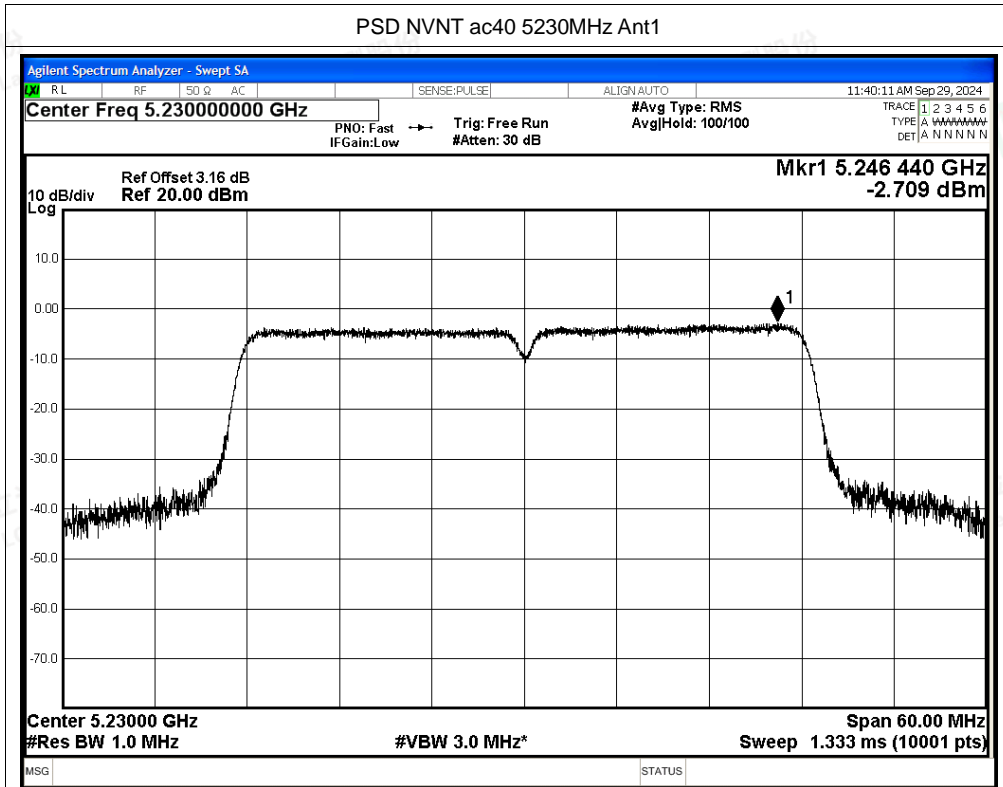

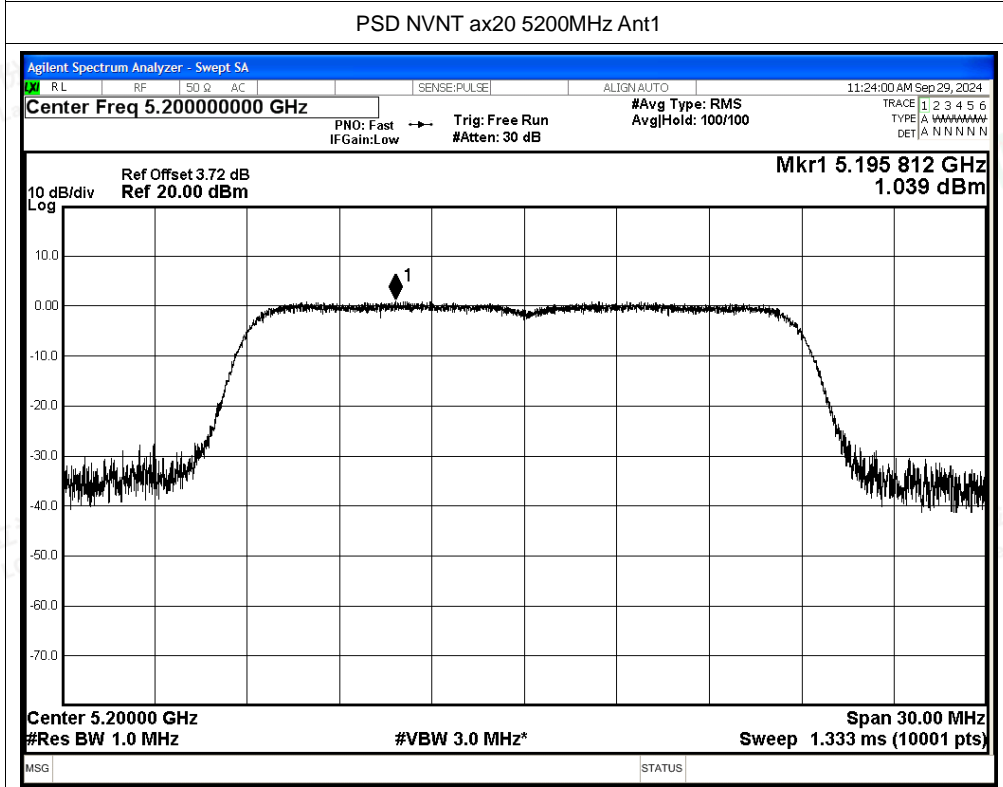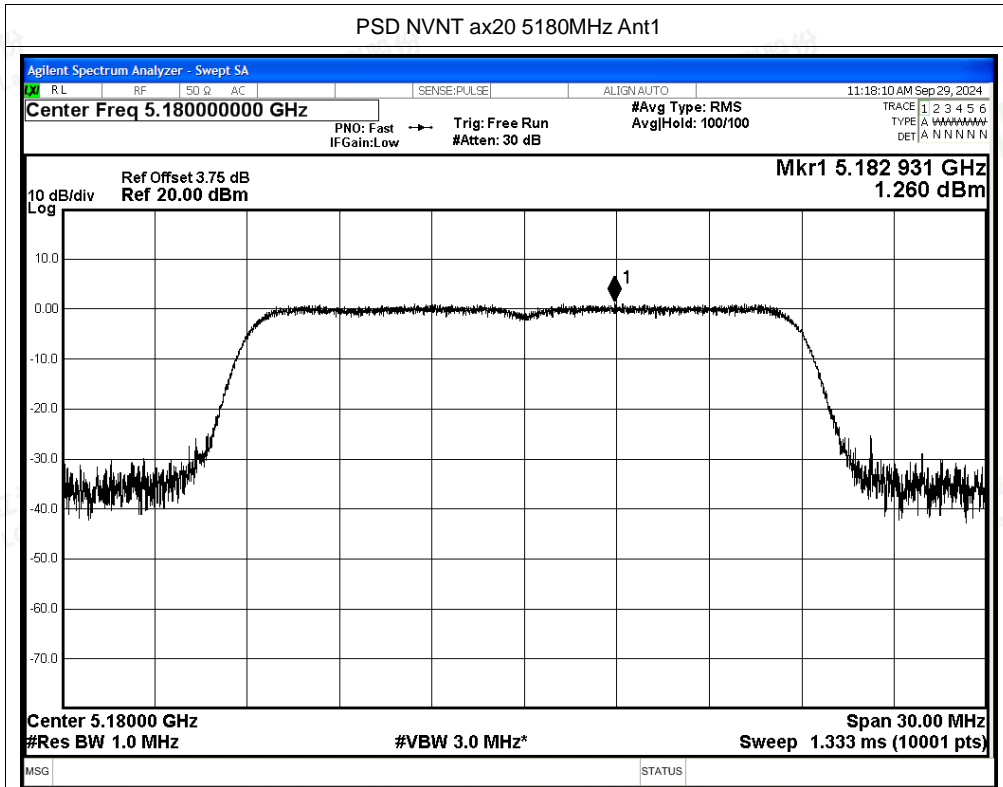

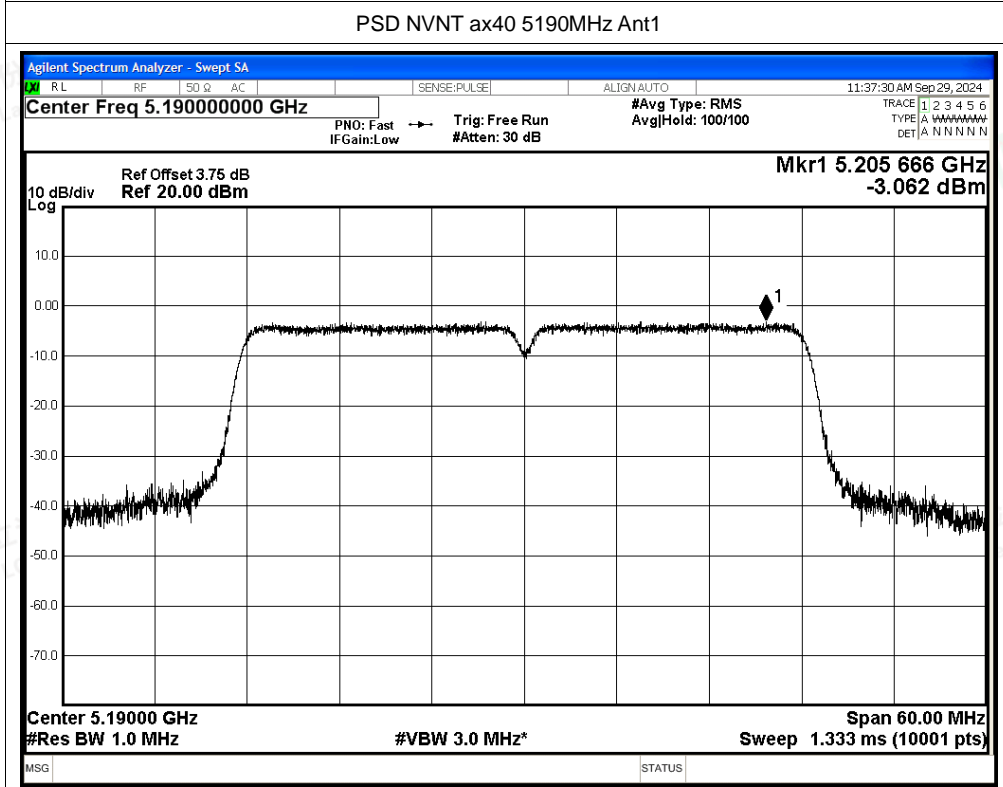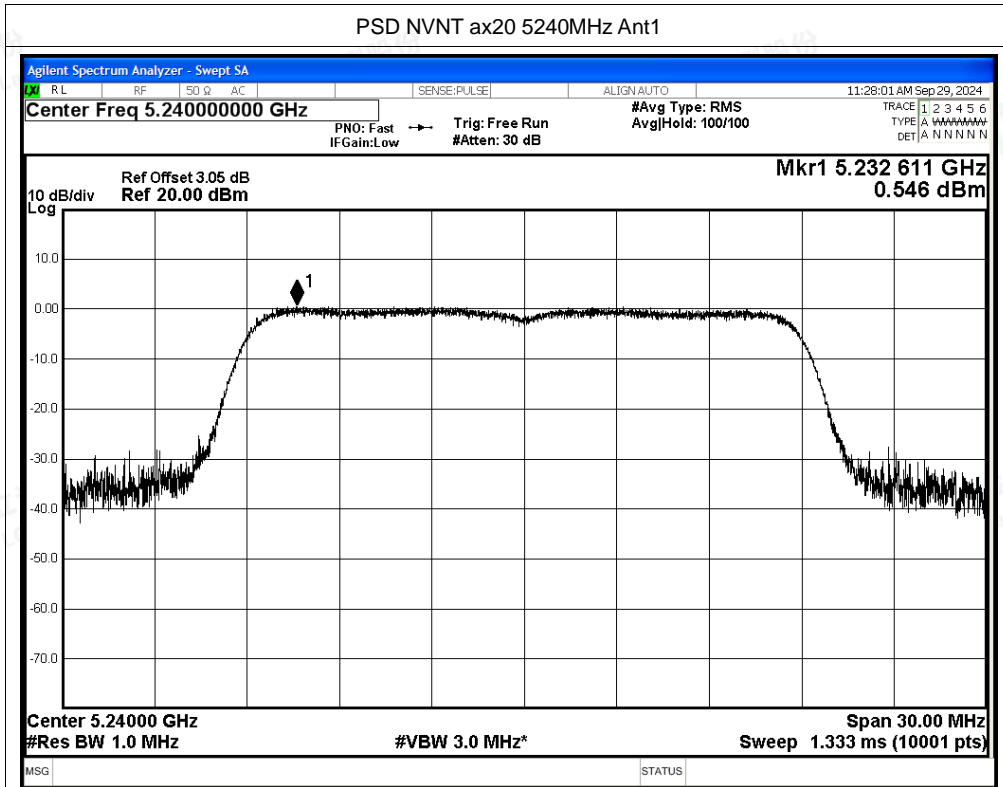

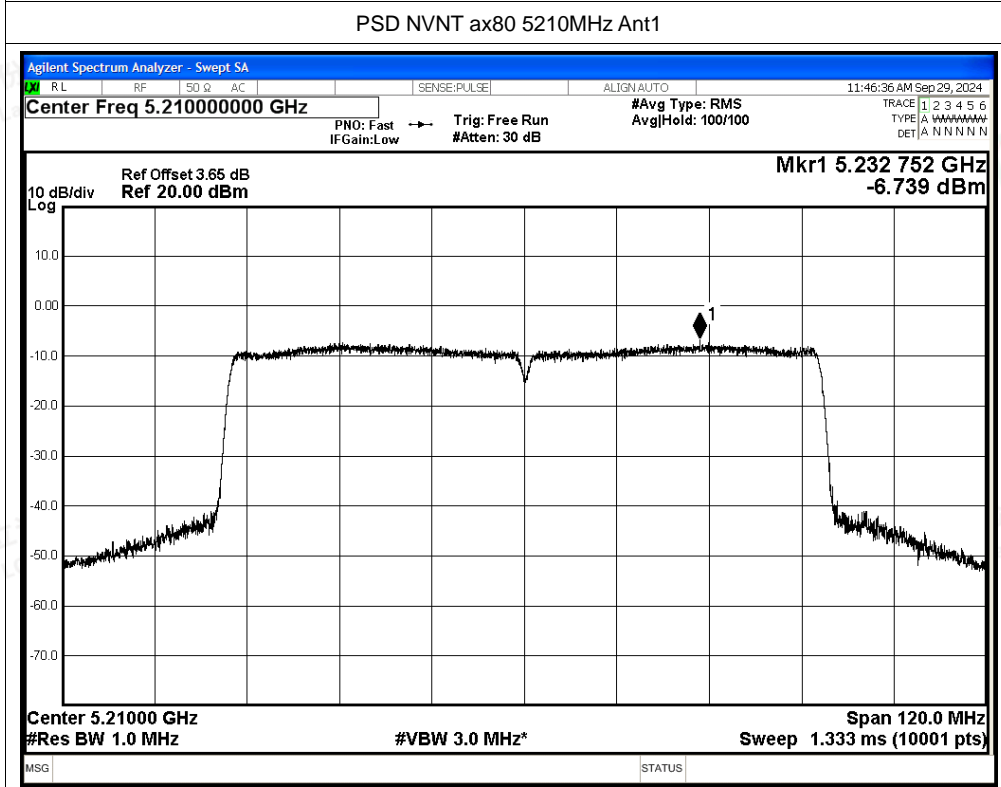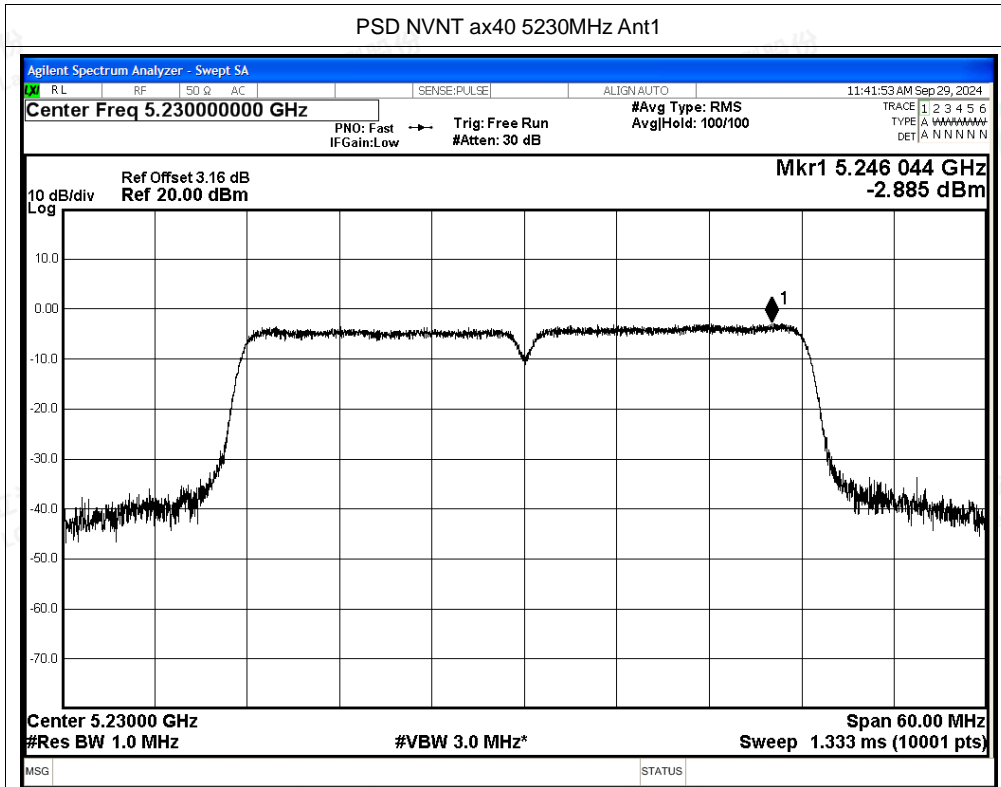



D.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant0	4500	-50.43	2	-	46.8	Peak	68.2	Pass
NVNT	a	5180	Ant0	4500	-58.03	2	0.24	39.44	Average	54	Pass
NVNT	a	5180	Ant0	5148.2	-36.91	2	-	60.32	Peak	68.2	Pass
NVNT	a	5180	Ant0	5148.9	-50.35	2	0.24	47.12	Average	54	Pass
NVNT	a	5180	Ant0	5150	-36.93	2	-	60.3	Peak	68.2	Pass
NVNT	a	5180	Ant0	5150	-49.4	2	0.24	48.07	Average	54	Pass
NVNT	a	5240	Ant0	5350	-48.85	2	-	48.38	Peak	68.2	Pass
NVNT	a	5240	Ant0	5350	-56.77	2	0.24	40.7	Average	54	Pass
NVNT	a	5240	Ant0	5394	-47.03	2	-	50.2	Peak	68.2	Pass
NVNT	a	5240	Ant0	5350.8	-56.5	2	0.24	40.97	Average	54	Pass
NVNT	a	5240	Ant0	5460	-50.89	2	-	46.34	Peak	68.2	Pass
NVNT	a	5240	Ant0	5460	-58.47	2	0.24	39	Average	54	Pass
NVNT	n20	5180	Ant0	4500	-50.82	2	-	46.41	Peak	68.2	Pass
NVNT	n20	5180	Ant0	4500	-58.17	2	0.28	39.34	Average	54	Pass
NVNT	n20	5180	Ant0	5148.2	-39.97	2	-	57.26	Peak	68.2	Pass
NVNT	n20	5180	Ant0	5148.9	-50.53	2	0.28	46.98	Average	54	Pass
NVNT	n20	5180	Ant0	5150	-39.65	2	-	57.58	Peak	68.2	Pass
NVNT	n20	5180	Ant0	5150	-50.51	2	0.28	47	Average	54	Pass
NVNT	n20	5240	Ant0	5350	-49.06	2	-	48.17	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5350	-57.64	2	0.28	39.87	Average	54	Pass
NVNT	n20	5240	Ant0	5366.64	-46.84	2	-	50.39	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5352	-56.98	2	0.28	40.53	Average	54	Pass
NVNT	n20	5240	Ant0	5460	-49.23	2	-	48	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5460	-58.93	2	0.28	38.58	Average	54	Pass
NVNT	n40	5190	Ant0	4500	-49.68	2	-	47.55	Peak	68.2	Pass
NVNT	n40	5190	Ant0	4500	-58.25	2	0.12	39.1	Average	54	Pass
NVNT	n40	5190	Ant0	5148.97	-40.26	2	-	56.97	Peak	68.2	Pass
NVNT	n40	5190	Ant0	5149.7	-52.31	2	0.12	45.04	Average	54	Pass
NVNT	n40	5190	Ant0	5150	-42.47	2	-	54.76	Peak	68.2	Pass
NVNT	n40	5190	Ant0	5150	-52.31	2	0.12	45.04	Average	54	Pass
NVNT	n40	5230	Ant0	5350	-49.97	2	-	47.26	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5350	-57.07	2	0.12	40.28	Average	54	Pass
NVNT	n40	5230	Ant0	5458.38	-46.29	2	-	50.94	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5371.71	-56.99	2	0.12	40.36	Average	54	Pass
NVNT	n40	5230	Ant0	5460	-49.07	2	-	48.16	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5460	-58.15	2	0.12	39.2	Average	54	Pass
NVNT	ac20	5180	Ant0	4500	-49.44	2	-	47.79	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	4500	-57.91	2	0.28	39.6	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NVNT	ac20	5180	Ant0	5116	-45.42	2	-	51.81	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	5139.8	-56.06	2	0.28	41.45	Average	54	Pass
NVNT	ac20	5180	Ant0	5150	-48.9	2	-	48.33	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	5150	-56.99	2	0.28	40.52	Average	54	Pass
NVNT	ac20	5240	Ant0	5350	-50.02	2	-	47.21	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5350	-57.36	2	0.28	40.15	Average	54	Pass
NVNT	ac20	5240	Ant0	5364.24	-47.23	2	-	50	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5351.28	-56.9	2	0.28	40.61	Average	54	Pass
NVNT	ac20	5240	Ant0	5460	-51.41	2	-	45.82	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5460	-57.57	2	0.28	39.94	Average	54	Pass
NVNT	ac40	5190	Ant0	4500	-50.48	2	-	46.75	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	4500	-58.45	2	0.12	38.9	Average	54	Pass
NVNT	ac40	5190	Ant0	5148.97	-41.95	2	-	55.28	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	5149.7	-54.23	2	0.12	43.12	Average	54	Pass
NVNT	ac40	5190	Ant0	5150	-41.95	2	-	55.28	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	5150	-54.23	2	0.12	43.12	Average	54	Pass
NVNT	ac40	5230	Ant0	5350	-49.32	2	-	47.91	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5350	-57.4	2	0.12	39.95	Average	54	Pass
NVNT	ac40	5230	Ant0	5394.12	-46.99	2	-	50.24	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5439.75	-57	2	0.12	40.35	Average	54	Pass
NVNT	ac40	5230	Ant0	5460	-50.61	2	-	46.62	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5460	-58.19	2	0.12	39.16	Average	54	Pass
NVNT	ac80	5210	Ant0	5350	-48.01	2	-	49.22	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5350	-56.82	2	0.25	40.66	Average	54	Pass
NVNT	ac80	5210	Ant0	5353.08	-46.02	2	-	51.21	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5350.77	-56.38	2	0.25	41.1	Average	54	Pass
NVNT	ac80	5210	Ant0	5460	-48.47	2	-	48.76	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5460	-57.91	2	0.25	39.57	Average	54	Pass
NVNT	ac80	5210	Ant0	4500	-51.75	2	-	45.48	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	4500	-58.87	2	0.25	38.61	Average	54	Pass
NVNT	ac80	5210	Ant0	5148.59	-42.95	2	-	54.28	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5149.38	-53.42	2	0.25	44.06	Average	54	Pass
NVNT	ac80	5210	Ant0	5150	-41.59	2	-	55.64	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5150	-54.12	2	0.25	43.36	Average	54	Pass
NVNT	ax20	5180	Ant0	4500	-50.01	2	-	47.22	Peak	68.2	Pass
NVNT	ax20	5180	Ant0	4500	-58.31	2	0.28	39.2	Average	54	Pass
NVNT	ax20	5180	Ant0	5148.2	-41.09	2	-	56.14	Peak	68.2	Pass
NVNT	ax20	5180	Ant0	5149.6	-54.99	2	0.28	42.52	Average	54	Pass
NVNT	ax20	5180	Ant0	5150	-44.05	2	-	53.18	Peak	68.2	Pass
NVNT	ax20	5180	Ant0	5150	-54.2	2	0.28	43.31	Average	54	Pass
NVNT	ax20	5240	Ant0	5350	-49.7	2	-	47.53	Peak	68.2	Pass
NVNT	ax20	5240	Ant0	5350	-57.47	2	0.28	40.04	Average	54	Pass
NVNT	ax20	5240	Ant0	5442.24	-47.31	2	-	49.92	Peak	68.2	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NVNT	ax20	5240	Ant0	5352.48	-56.79	2	0.28	40.72	Average	54	Pass
NVNT	ax20	5240	Ant0	5460	-49.39	2	-	47.84	Peak	68.2	Pass
NVNT	ax20	5240	Ant0	5460	-58.84	2	0.28	38.67	Average	54	Pass
NVNT	ax40	5190	Ant0	4500	-48.65	2	-	48.58	Peak	68.2	Pass
NVNT	ax40	5190	Ant0	4500	-58.62	2	0.12	38.73	Average	54	Pass
NVNT	ax40	5190	Ant0	5148.97	-41.94	2	-	55.29	Peak	68.2	Pass
NVNT	ax40	5190	Ant0	5149.7	-52.01	2	0.12	45.34	Average	54	Pass
NVNT	ax40	5190	Ant0	5150	-43.4	2	-	53.83	Peak	68.2	Pass
NVNT	ax40	5190	Ant0	5150	-52.01	2	0.12	45.34	Average	54	Pass
NVNT	ax40	5230	Ant0	5350	-48.3	2	-	48.93	Peak	68.2	Pass
NVNT	ax40	5230	Ant0	5350	-57.48	2	0.12	39.87	Average	54	Pass
NVNT	ax40	5230	Ant0	5373.87	-47.33	2	-	49.9	Peak	68.2	Pass
NVNT	ax40	5230	Ant0	5421.66	-56.84	2	0.12	40.51	Average	54	Pass
NVNT	ax40	5230	Ant0	5460	-48.31	2	-	48.92	Peak	68.2	Pass
NVNT	ax40	5230	Ant0	5460	-57.89	2	0.12	39.46	Average	54	Pass
NVNT	ax80	5210	Ant0	5350	-47.81	2	-	49.42	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5350	-56.33	2	0.25	41.15	Average	54	Pass
NVNT	ax80	5210	Ant0	5432.94	-46.11	2	-	51.12	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5351.1	-56.26	2	0.25	41.22	Average	54	Pass
NVNT	ax80	5210	Ant0	5460	-50.53	2	-	46.7	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5460	-57.4	2	0.25	40.08	Average	54	Pass
NVNT	ax80	5210	Ant0	4500	-50.62	2	-	46.61	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	4500	-58.02	2	0.25	39.46	Average	54	Pass
NVNT	ax80	5210	Ant0	5149.38	-42.18	2	-	55.05	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5149.38	-53.49	2	0.25	43.99	Average	54	Pass
NVNT	ax80	5210	Ant0	5150	-43.99	2	-	53.24	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5150	-53.23	2	0.25	44.25	Average	54	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Restrict Band NVNT a 5180MHz Ant0 Peak

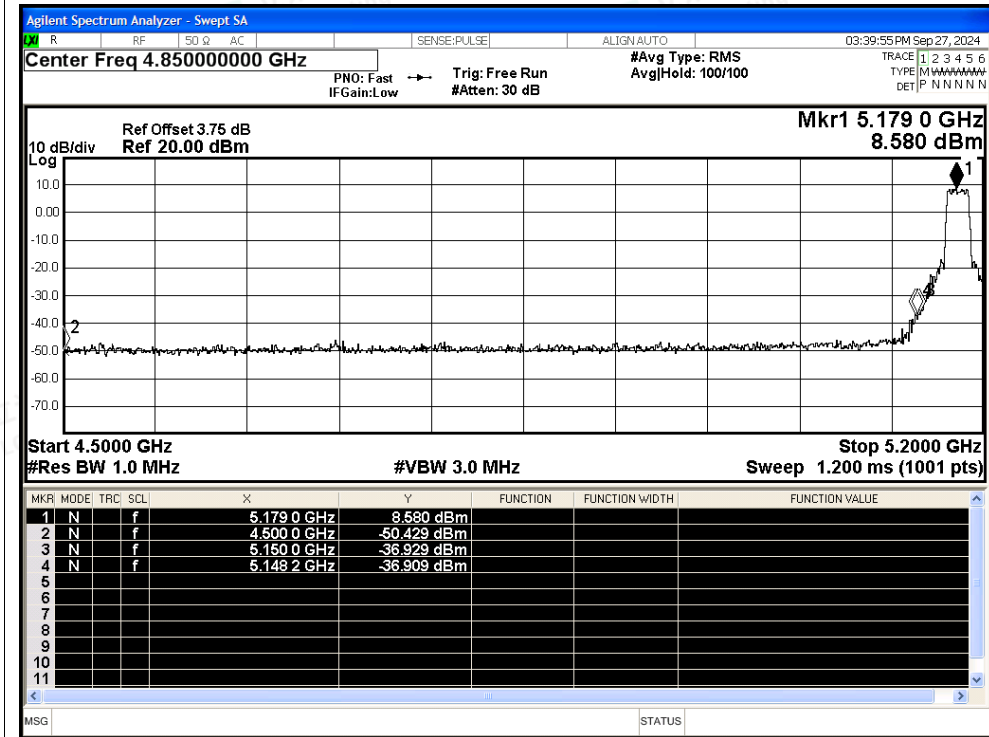


Restrict Band NVNT a 5180MHz Ant0 Average

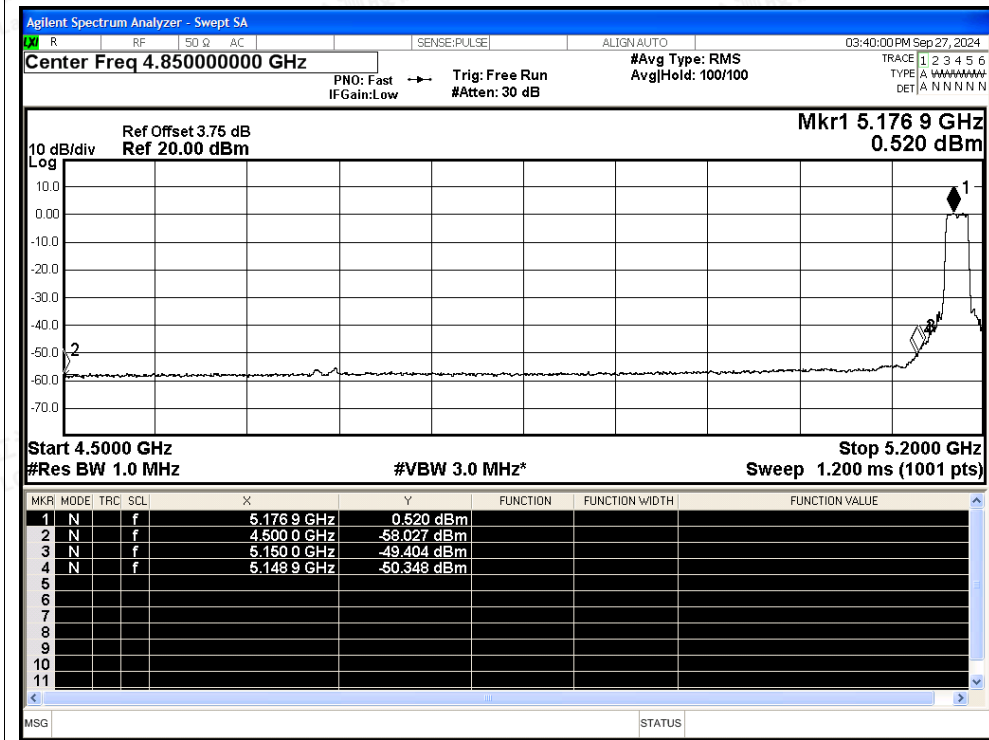






Restrict Band NVNT a 5240MHz Ant0 Peak

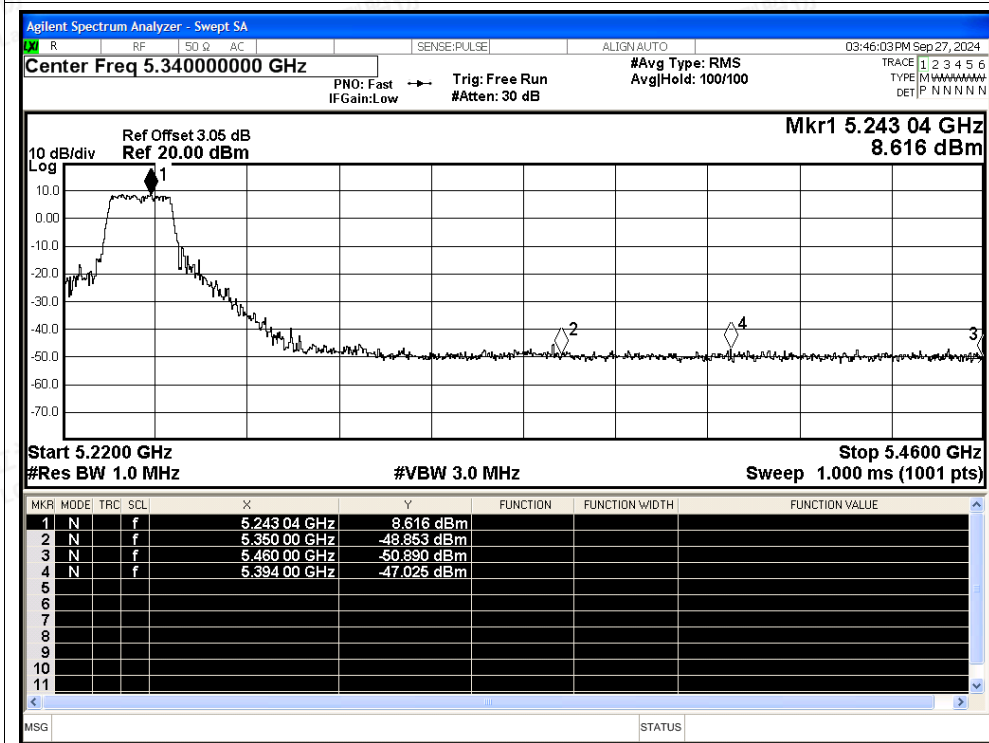


Restrict Band NVNT a 5240MHz Ant0 Average

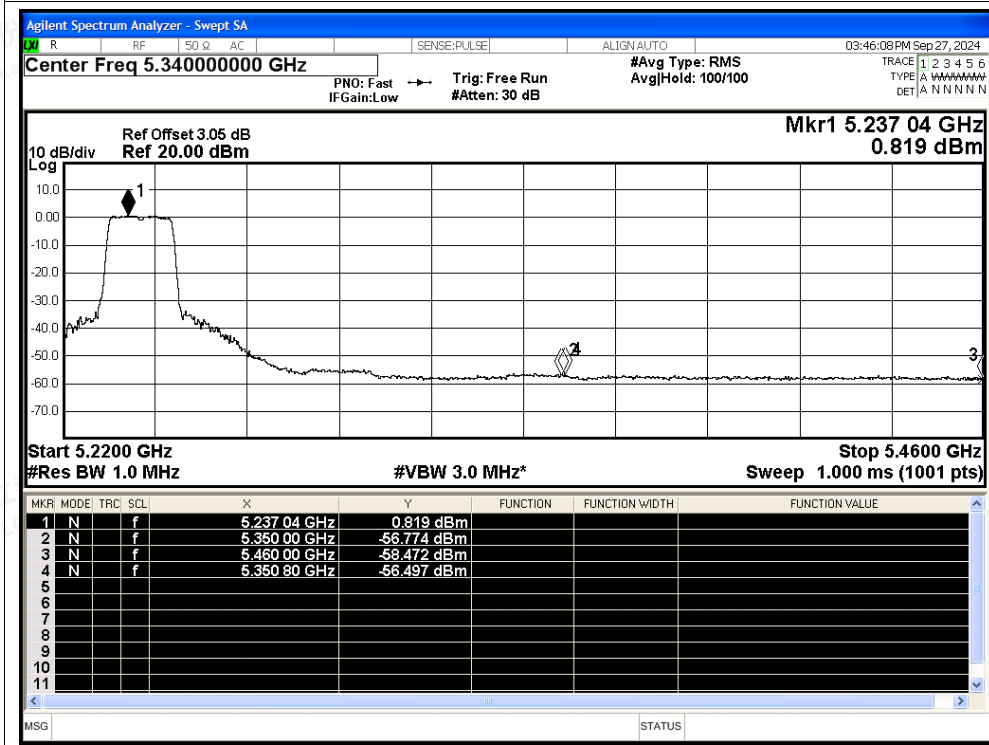

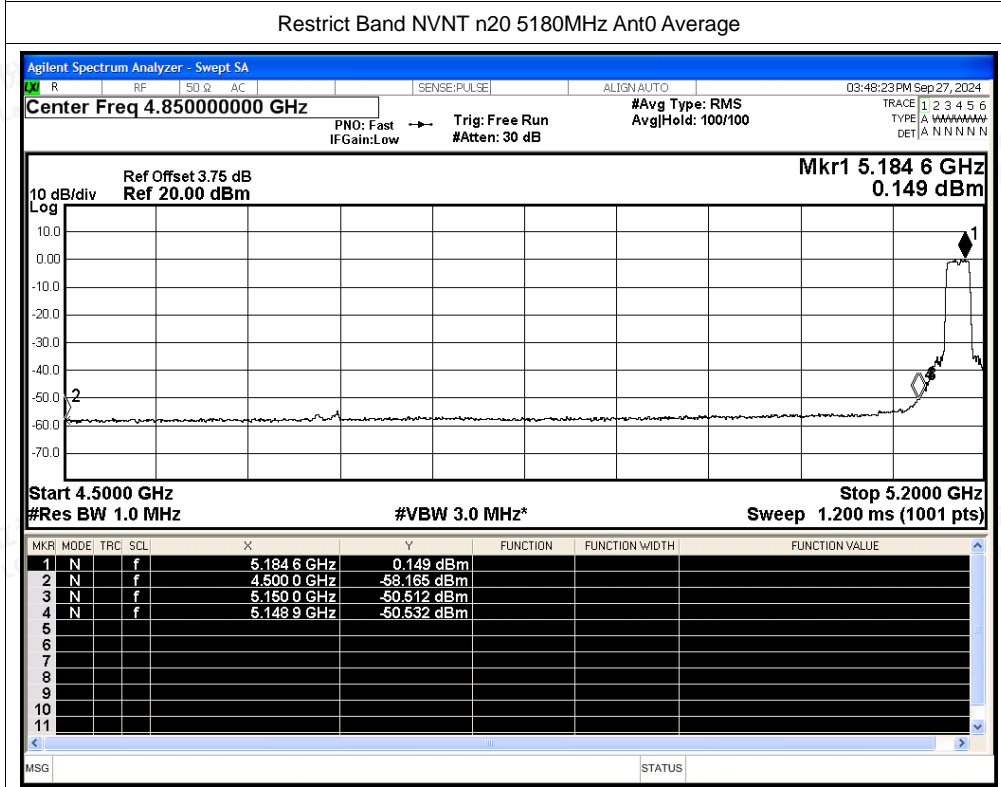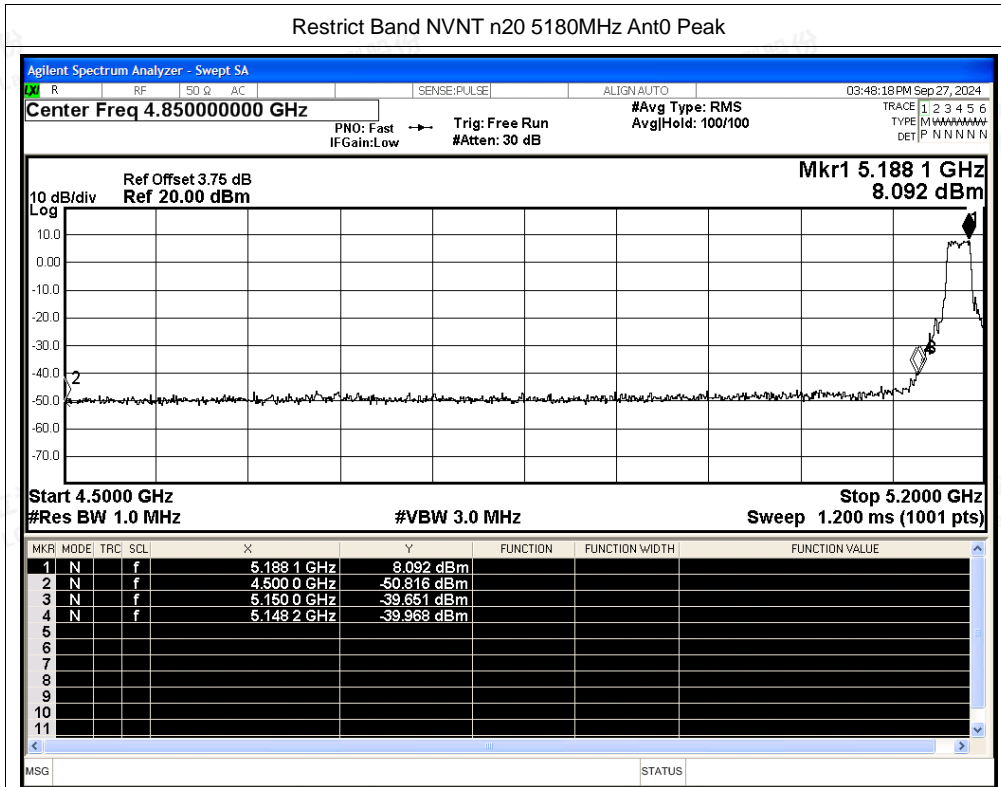




Restrict Band NVNT n20 5240MHz Ant0 Peak

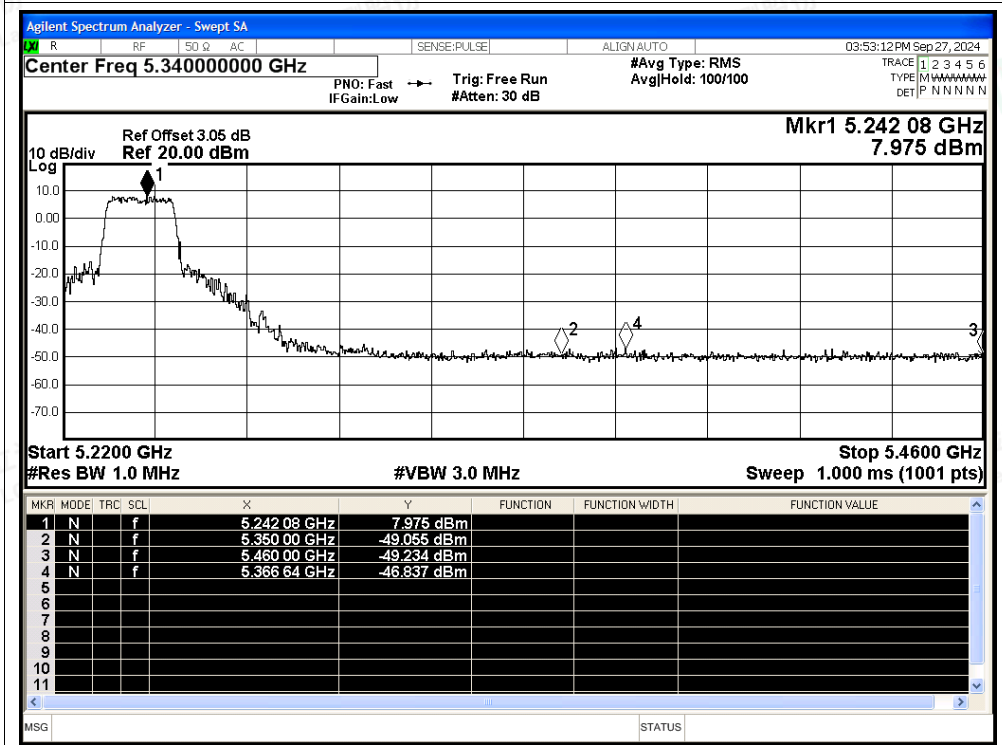


Restrict Band NVNT n20 5240MHz Ant0 Average

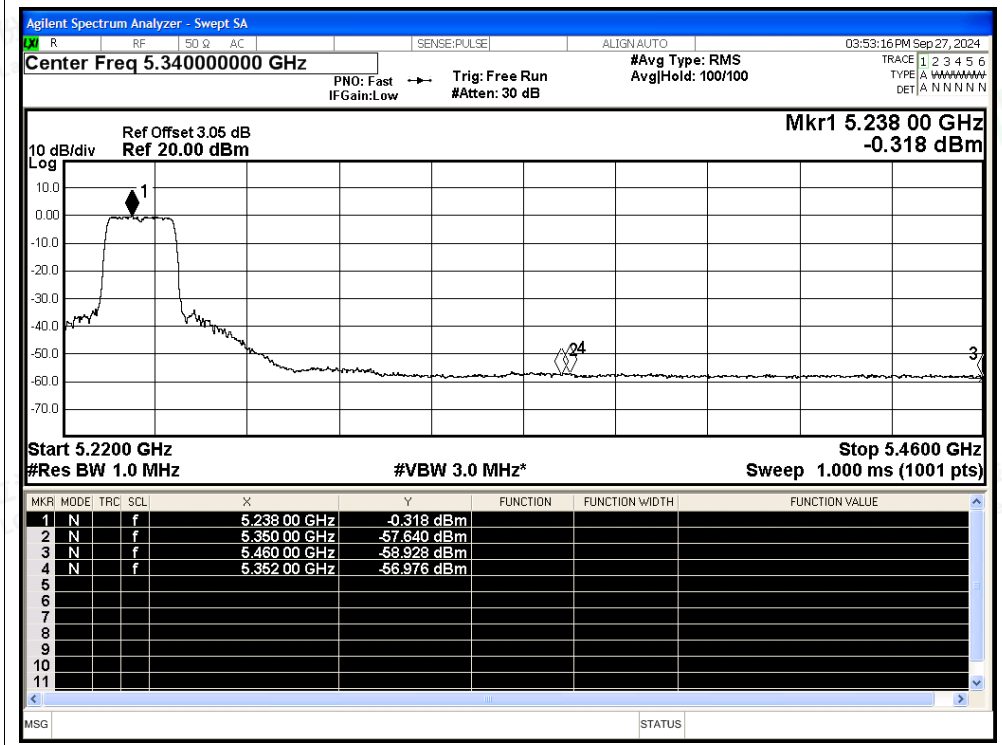




Restrict Band NVNT n40 5190MHz Ant0 Peak

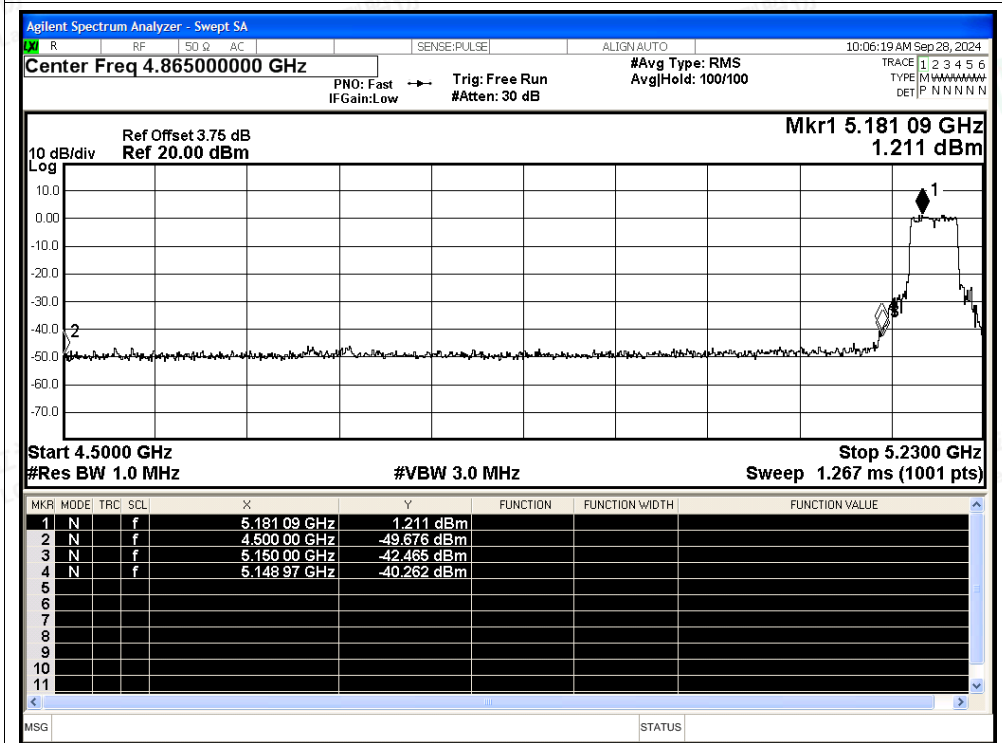


Restrict Band NVNT n40 5190MHz Ant0 Average

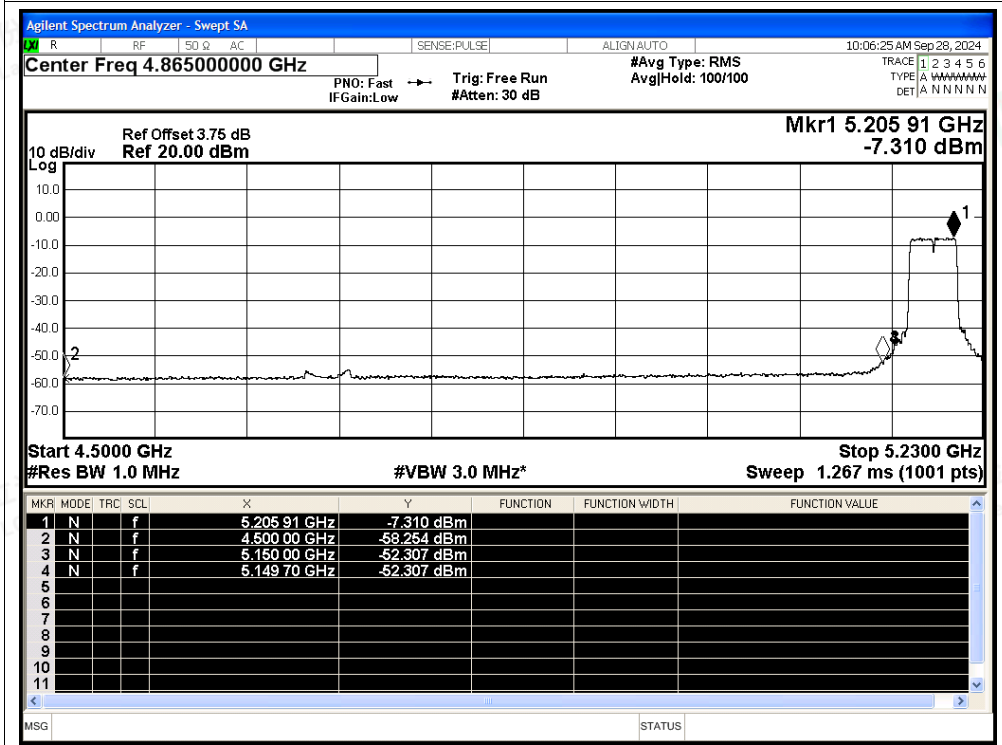






Restrict Band NVNT n40 5230MHz Ant0 Peak

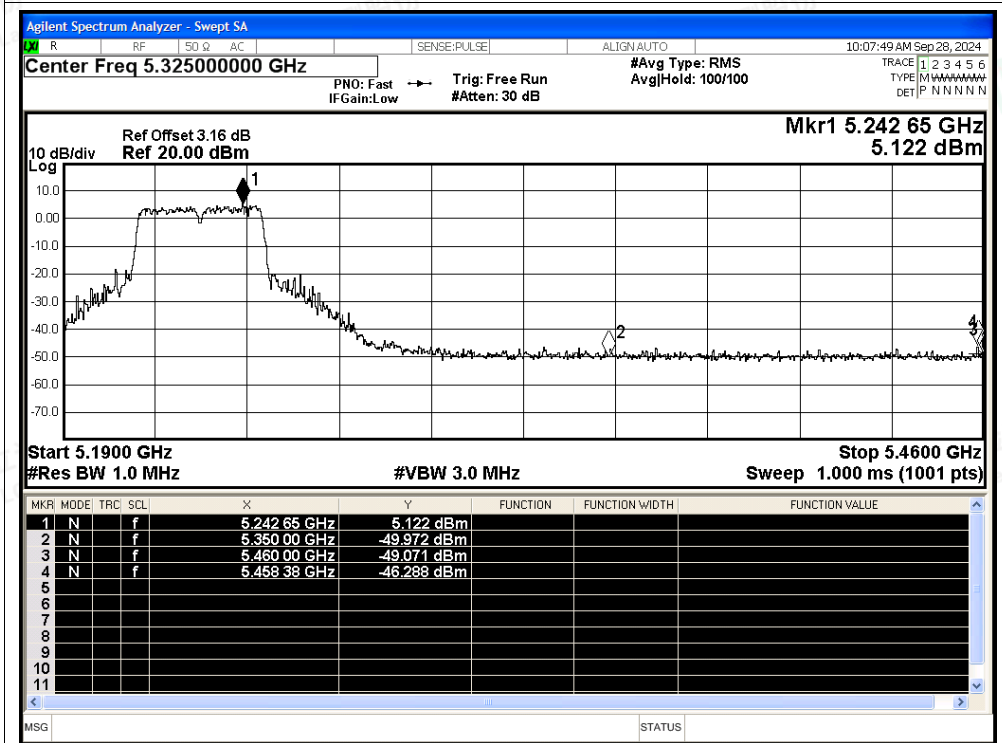


Restrict Band NVNT n40 5230MHz Ant0 Average

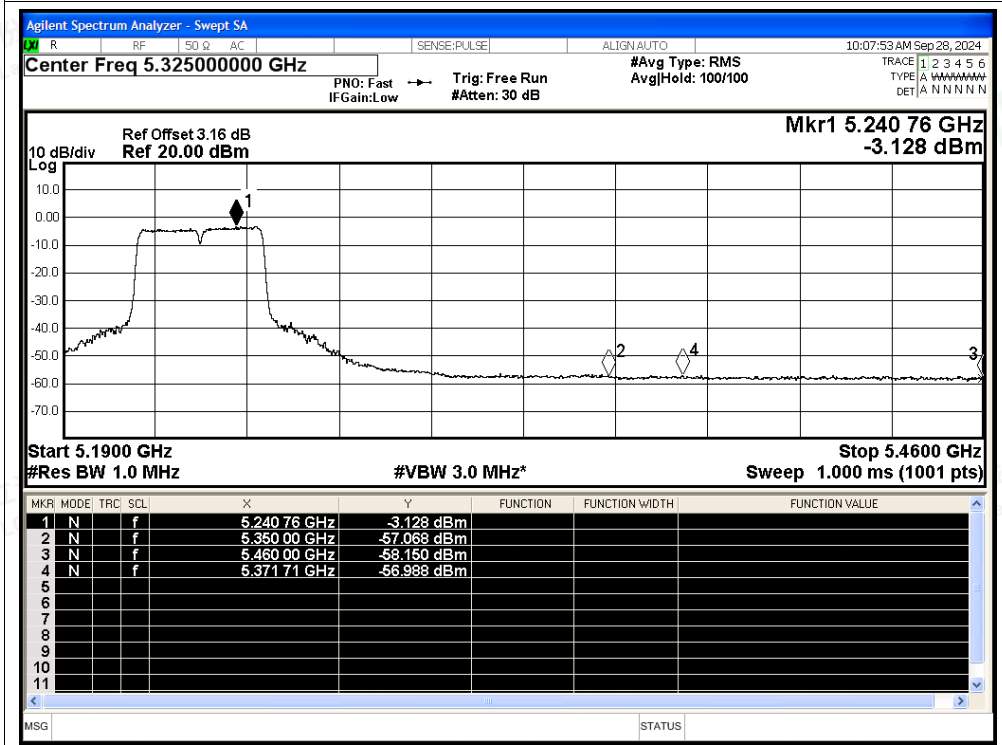

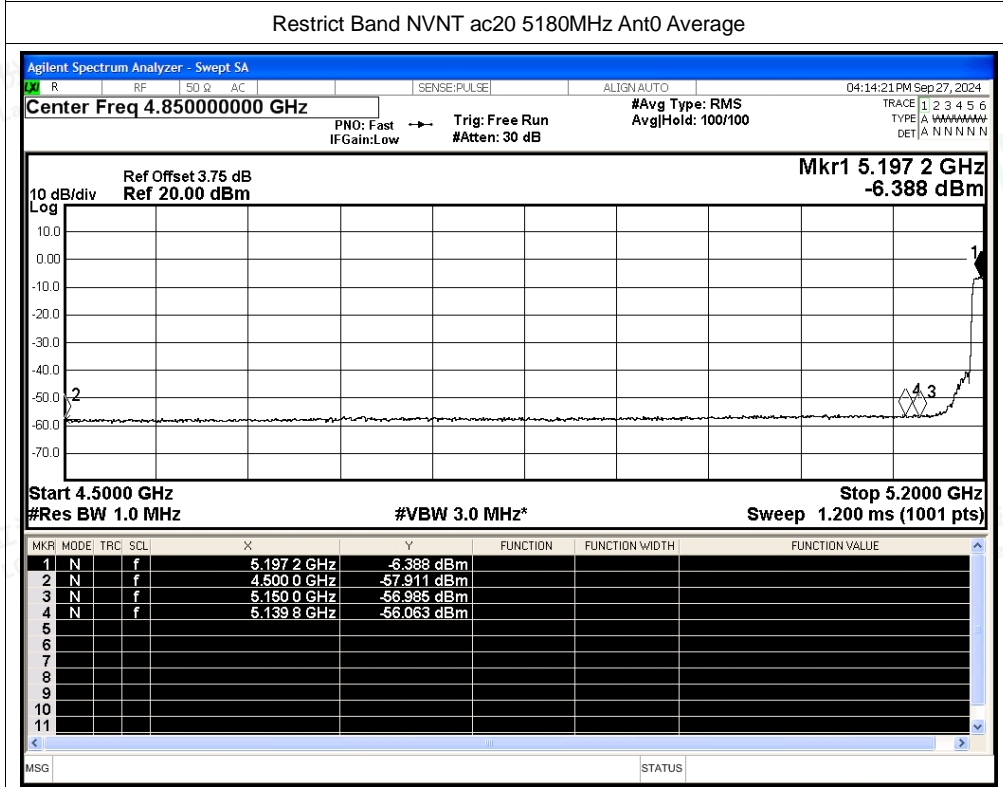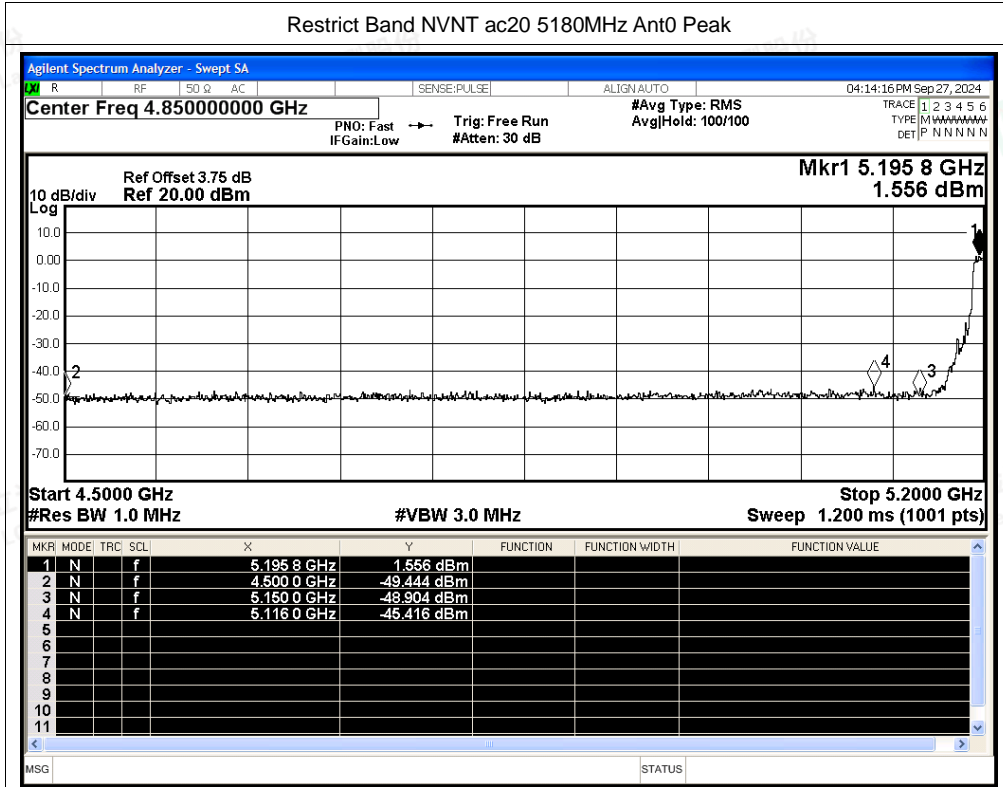






Restrict Band NVNT ac20 5240MHz Ant0 Peak

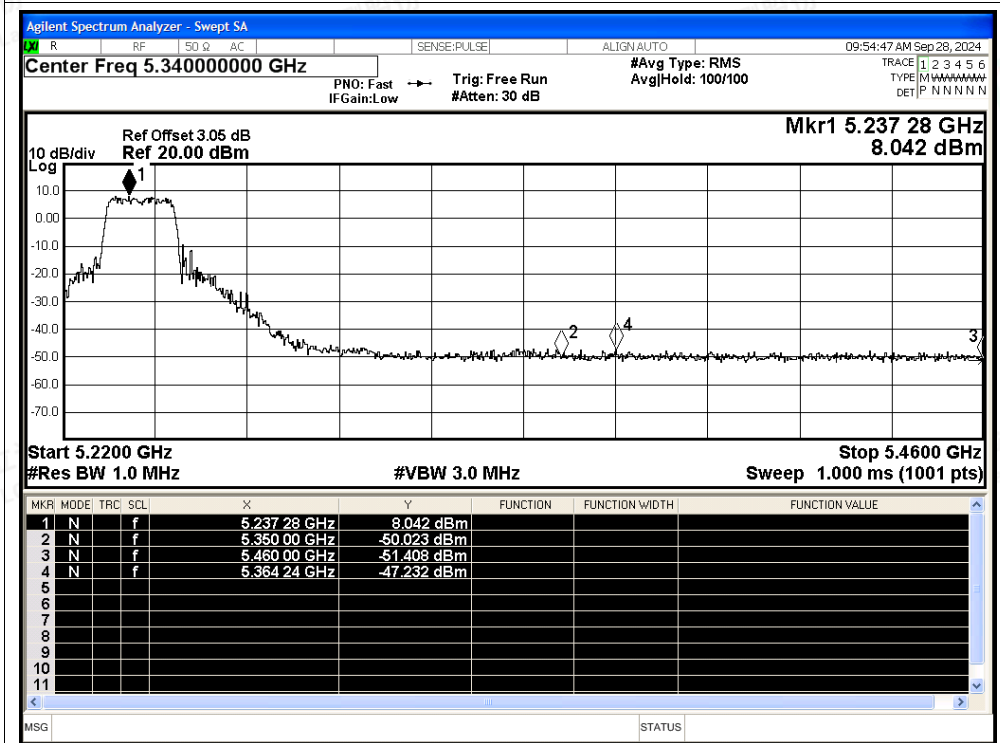


Restrict Band NVNT ac20 5240MHz Ant0 Average

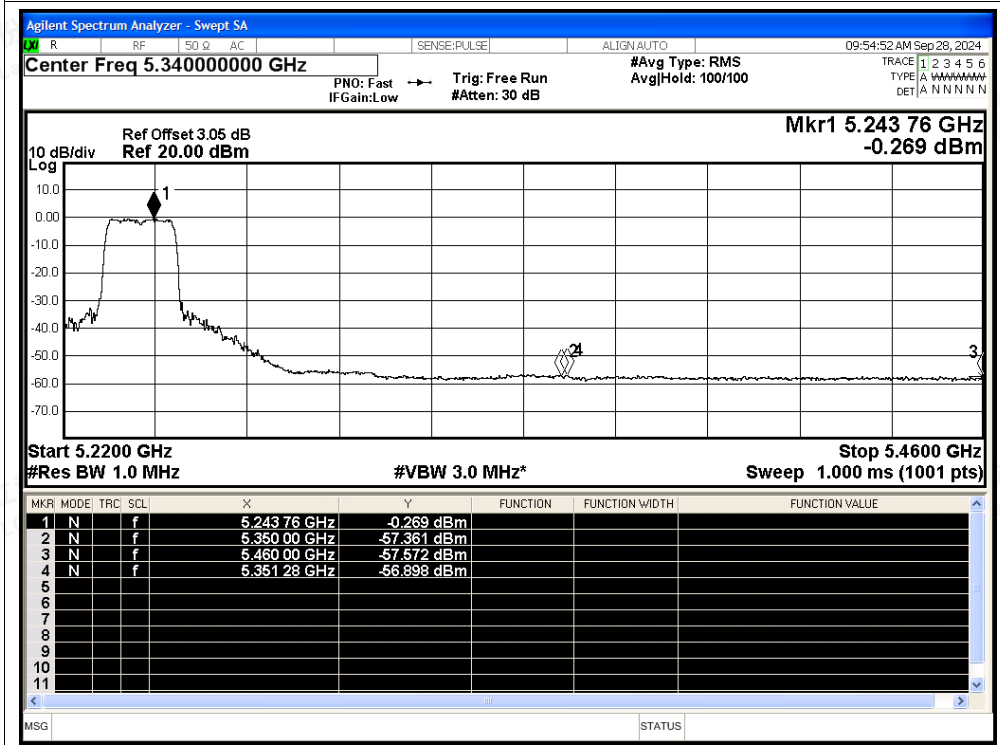

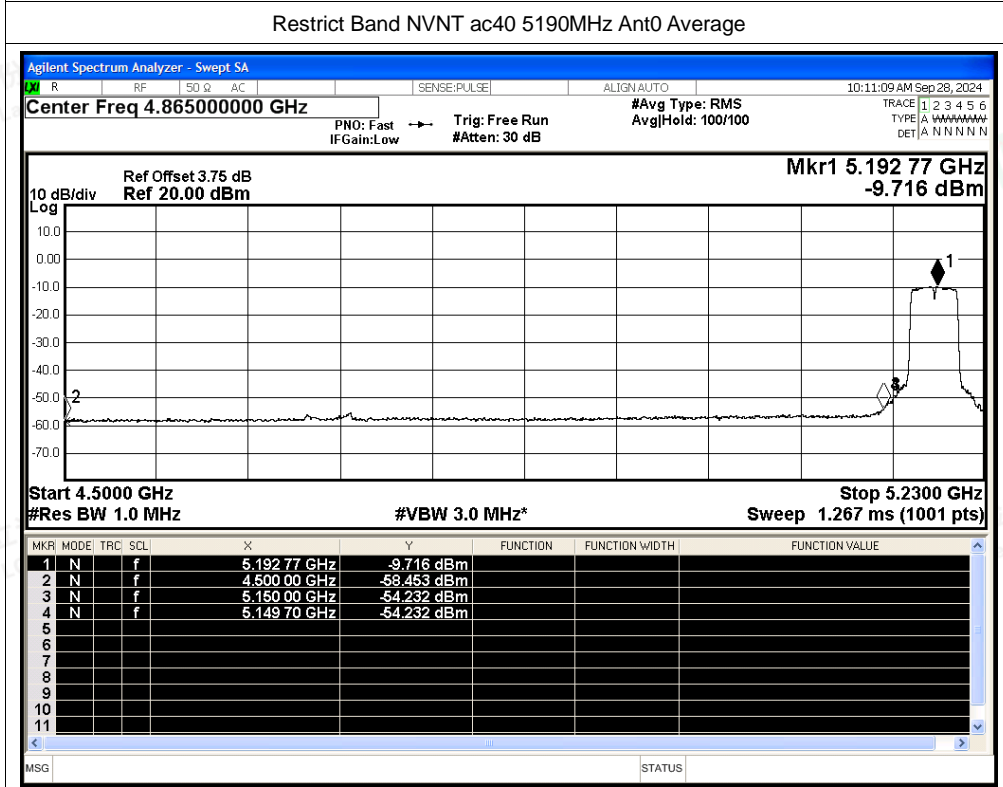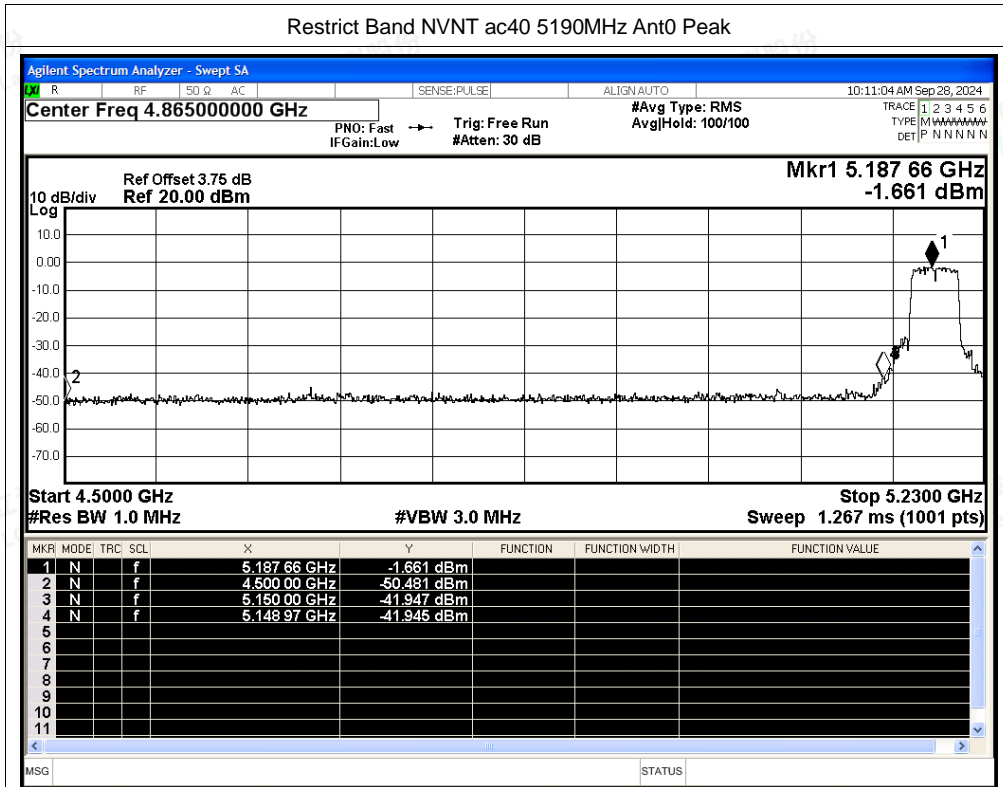




Restrict Band NVNT ac40 5230MHz Ant0 Peak

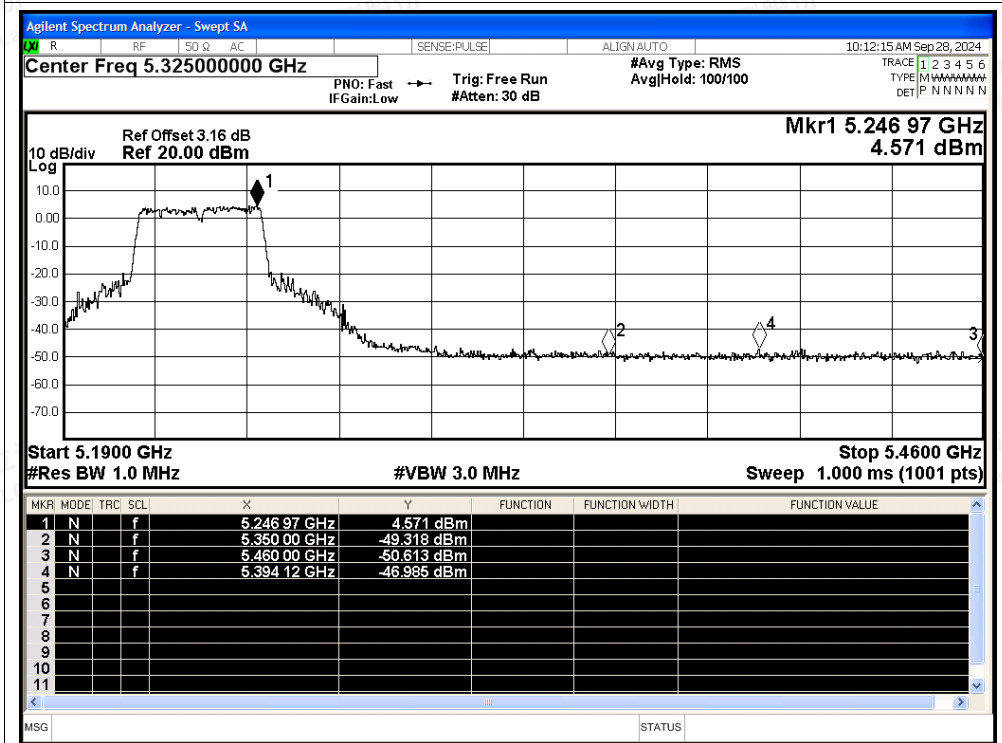


Restrict Band NVNT ac40 5230MHz Ant0 Average

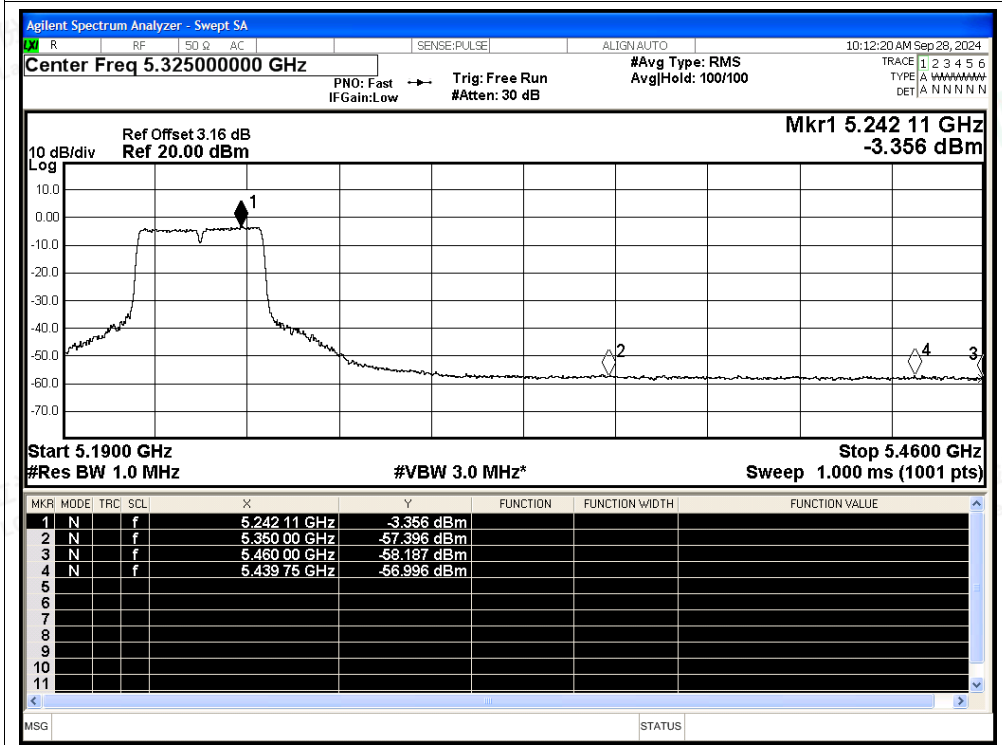




Restrict Band NVNT ac80 5210MHz Ant0 Peak

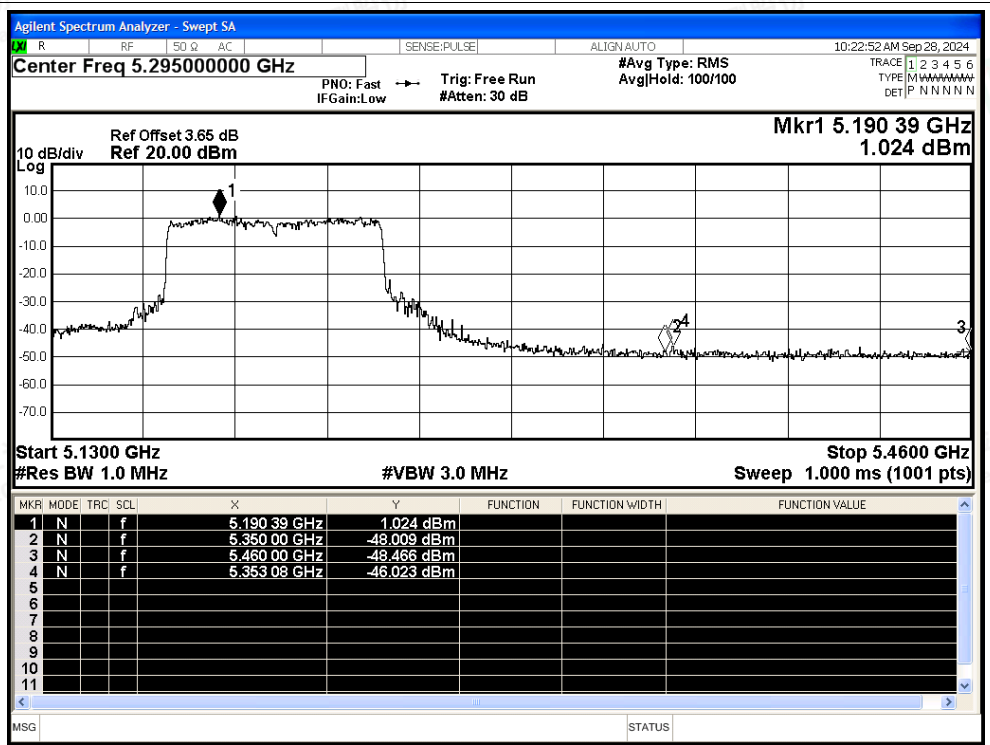


Restrict Band NVNT ac80 5210MHz Ant0 Average

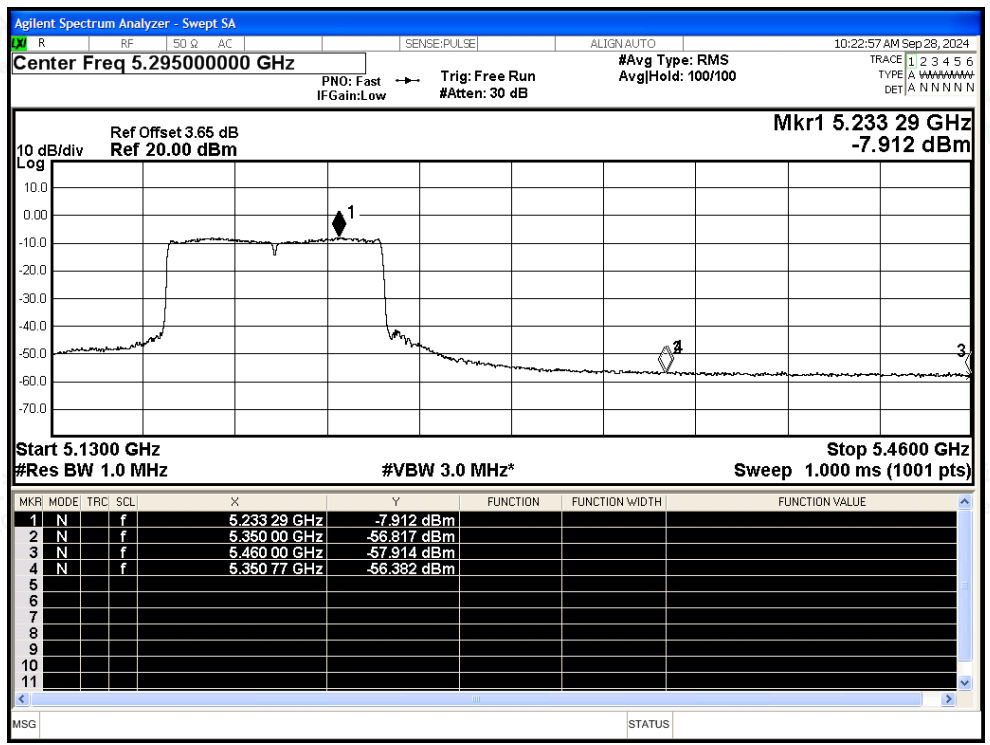






Restrict Band NVNT ac80 5210MHz Ant0 Peak

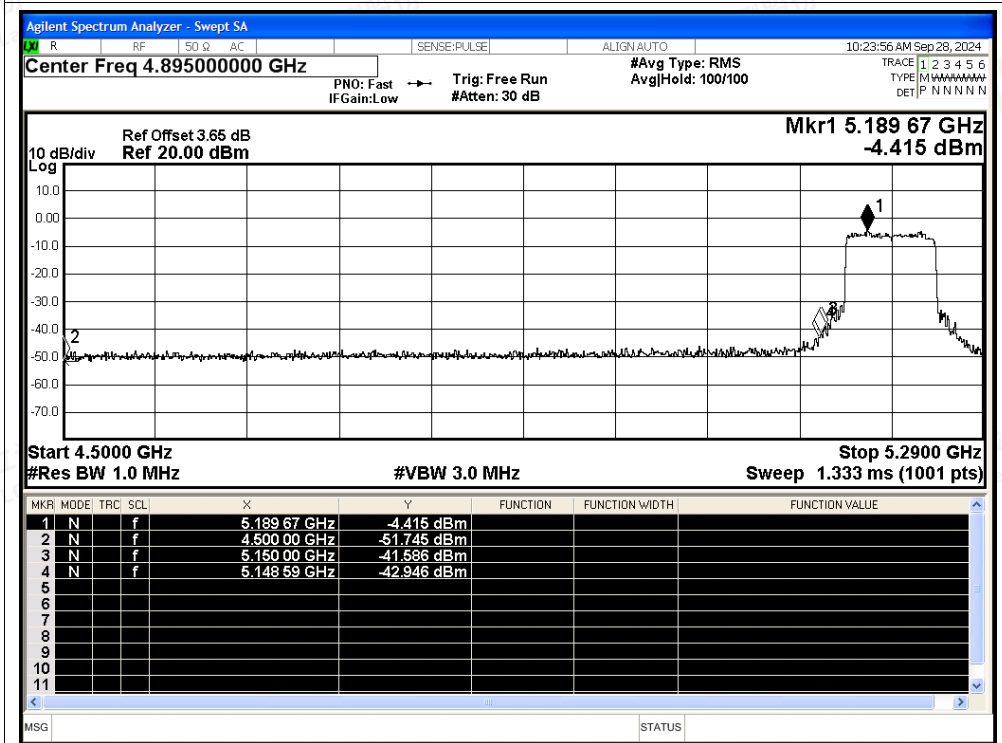


Restrict Band NVNT ac80 5210MHz Ant0 Average

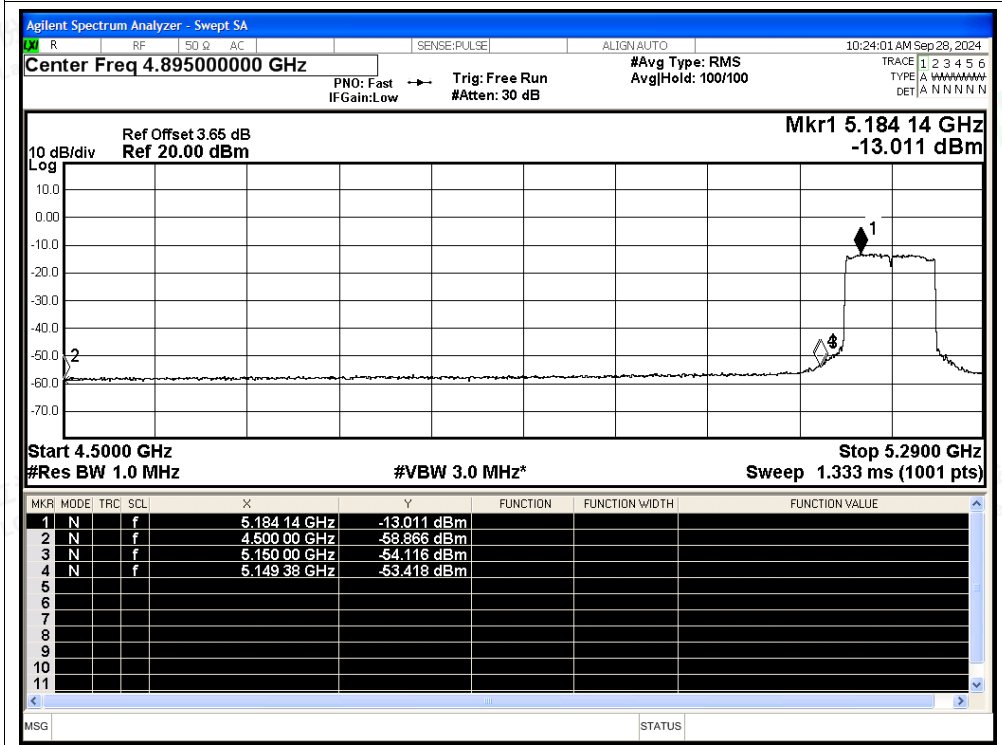

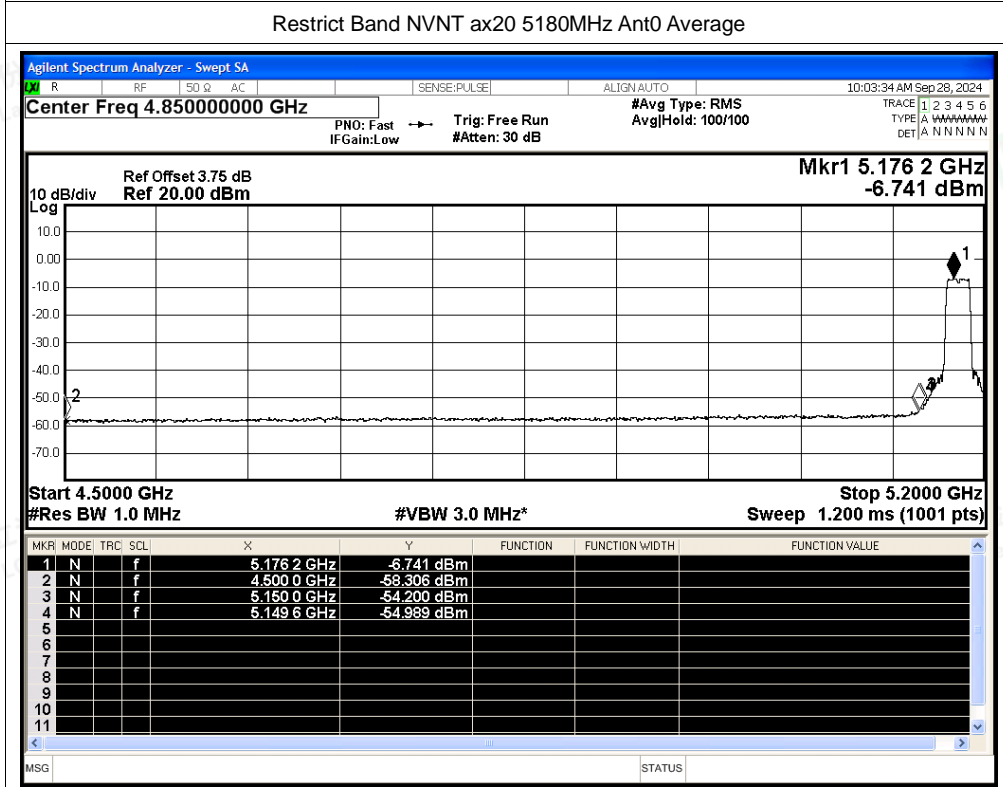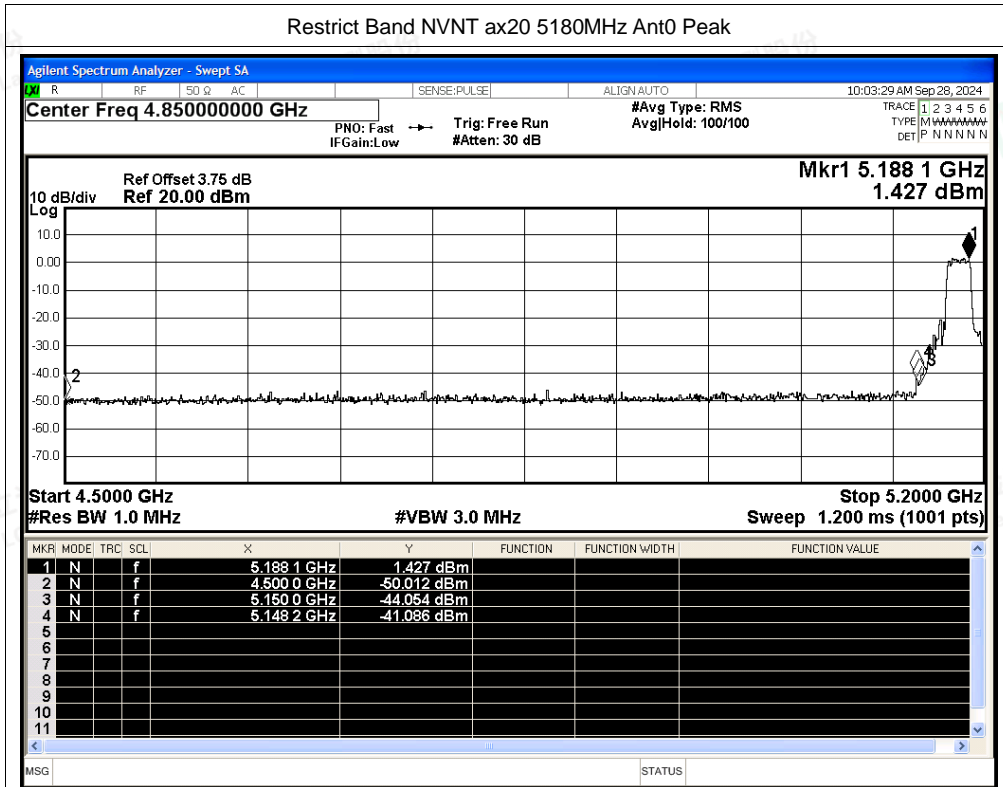






Restrict Band NVNT ax20 5240MHz Ant0 Peak

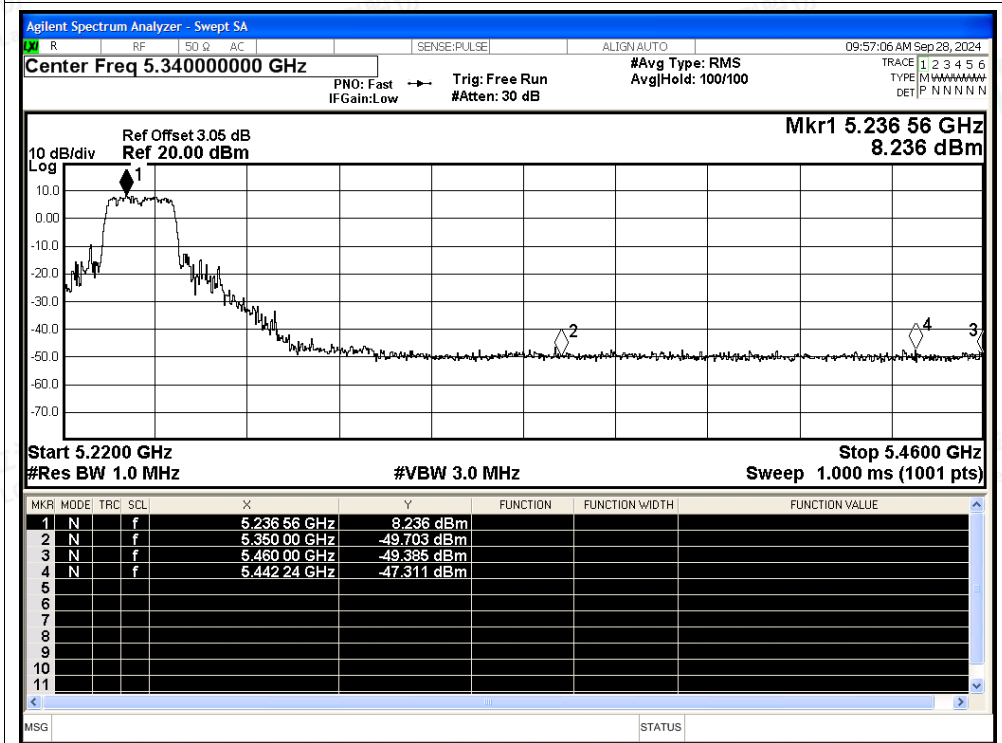


Restrict Band NVNT ax20 5240MHz Ant0 Average

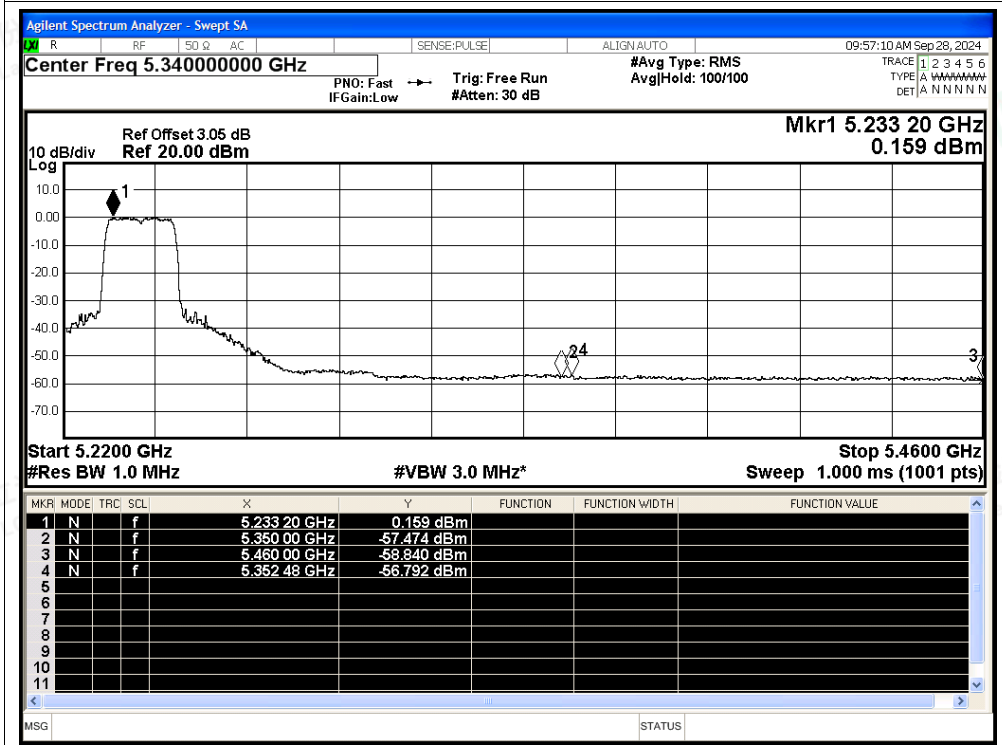

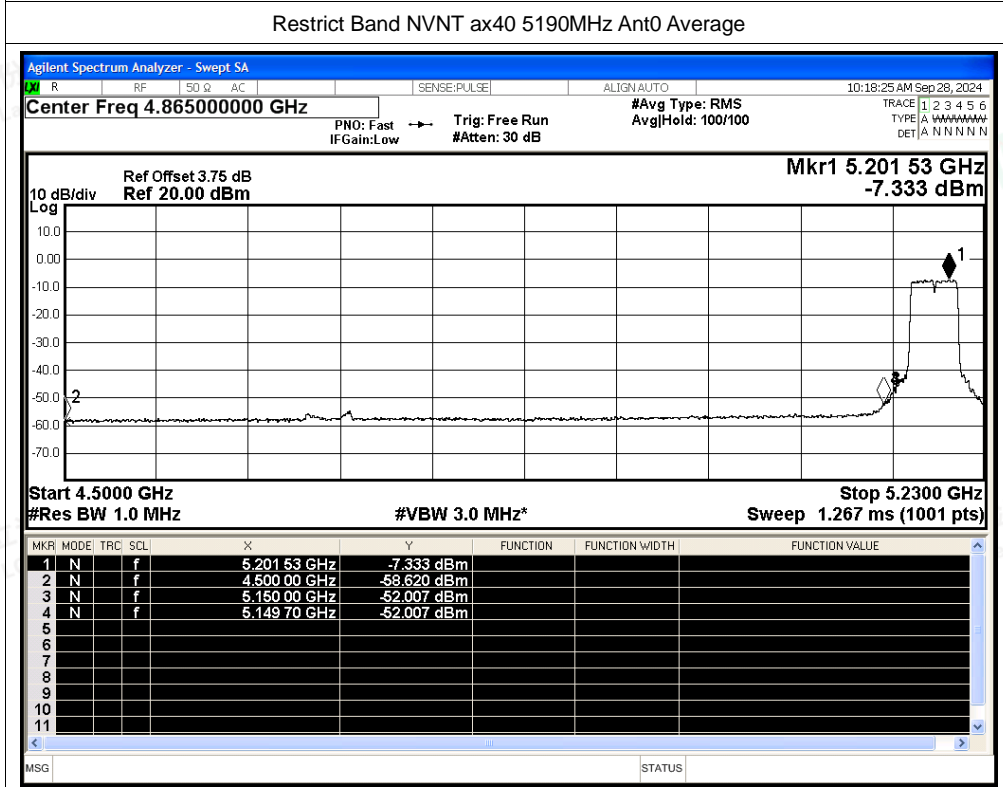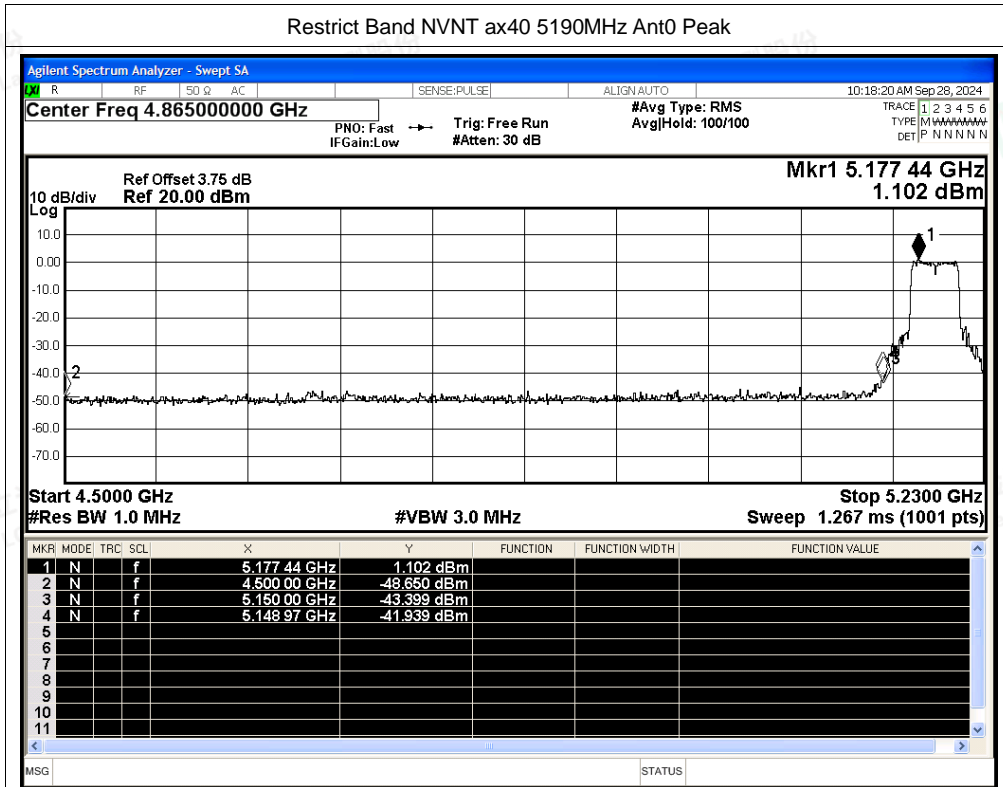




Restrict Band NVNT ax40 5230MHz Ant0 Peak

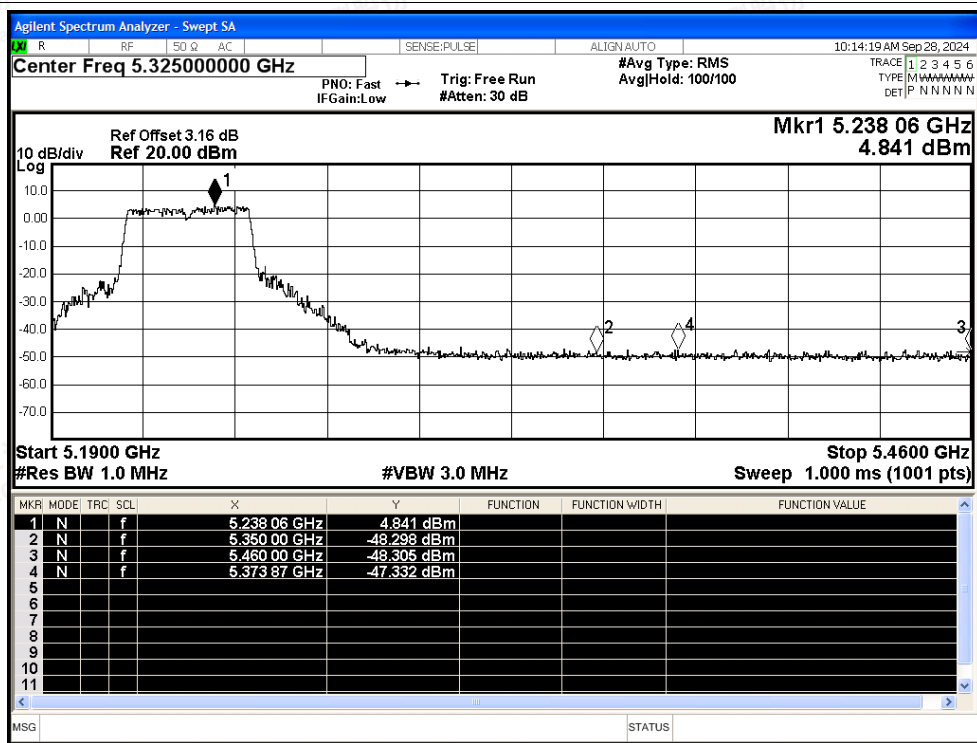


Restrict Band NVNT ax40 5230MHz Ant0 Average

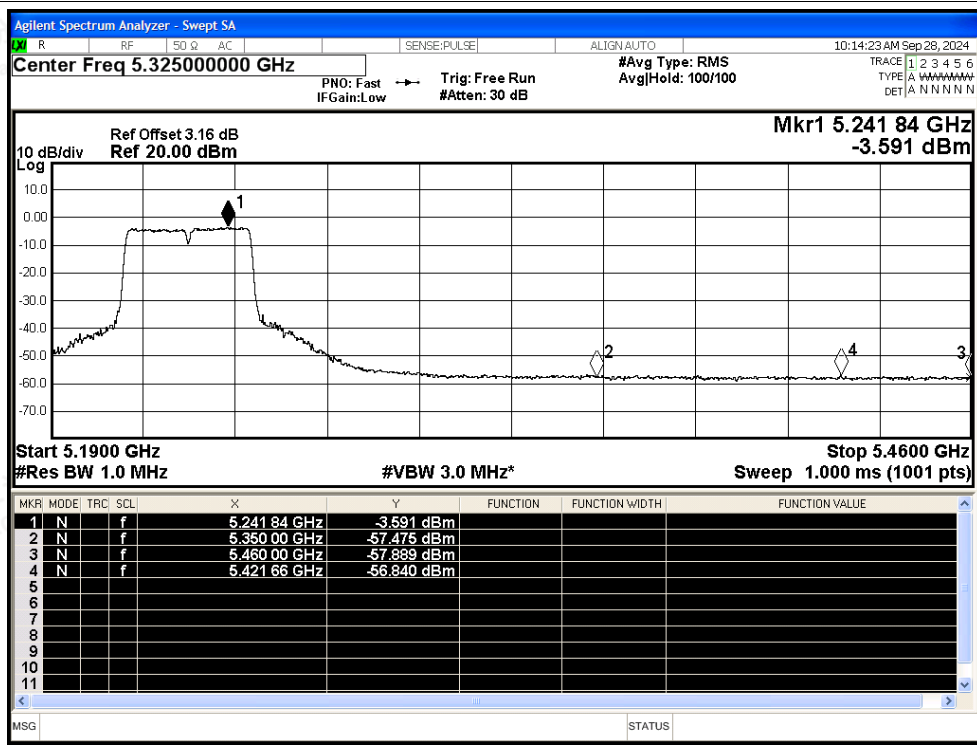






Restrict Band NVNT ax80 5210MHz Ant0 Peak

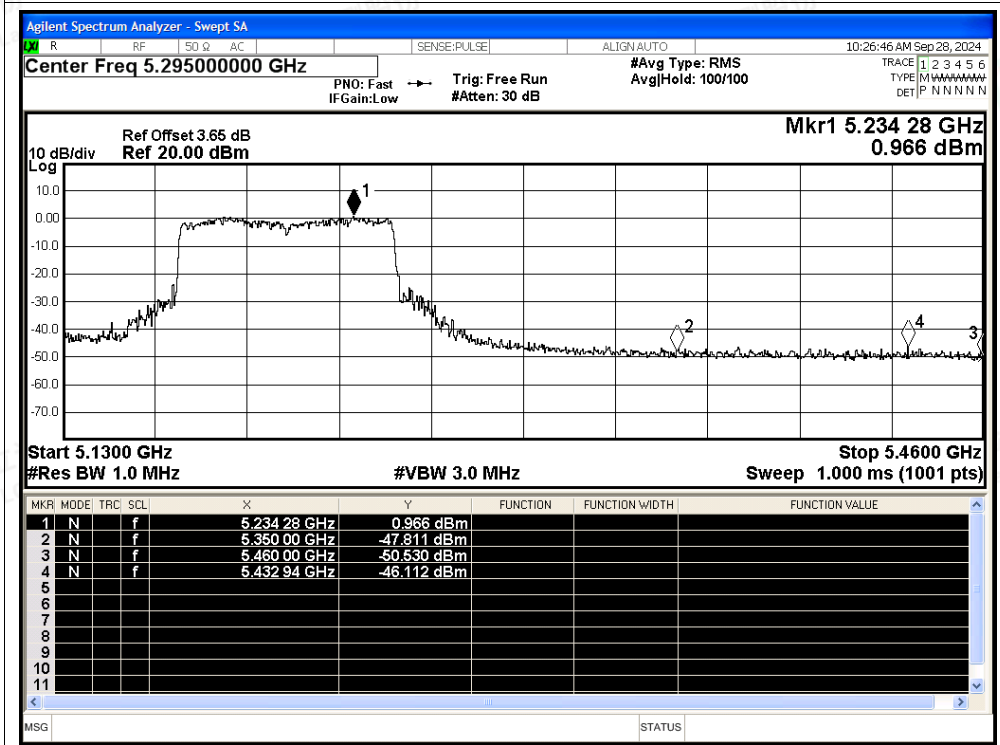

Restrict Band NVNT ax80 5210MHz Ant0 Average

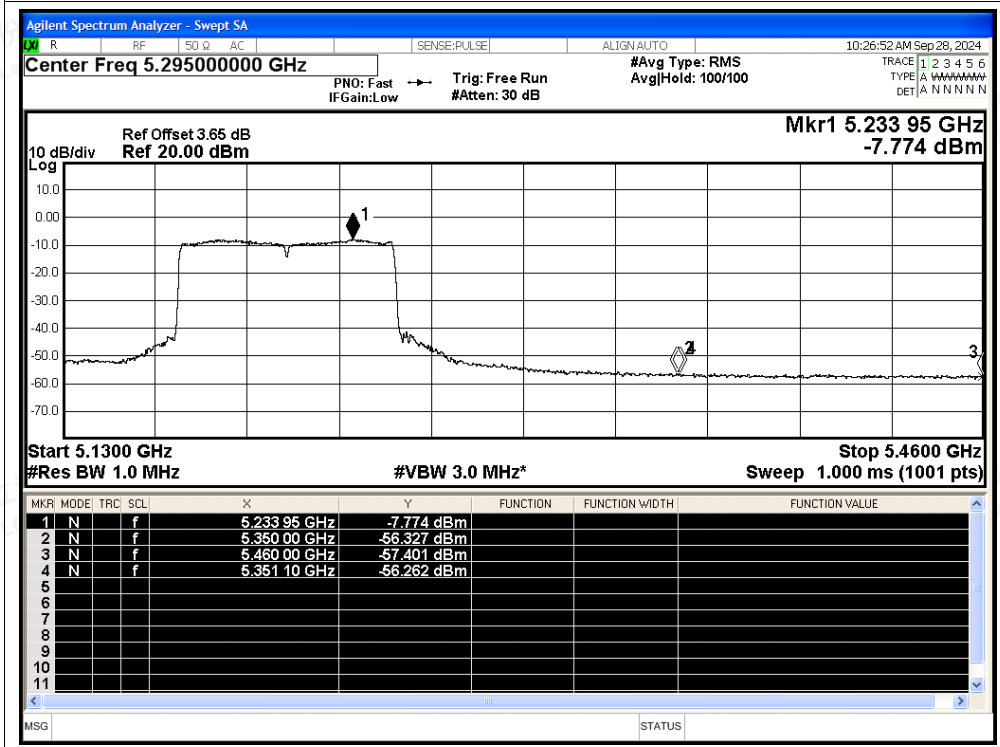

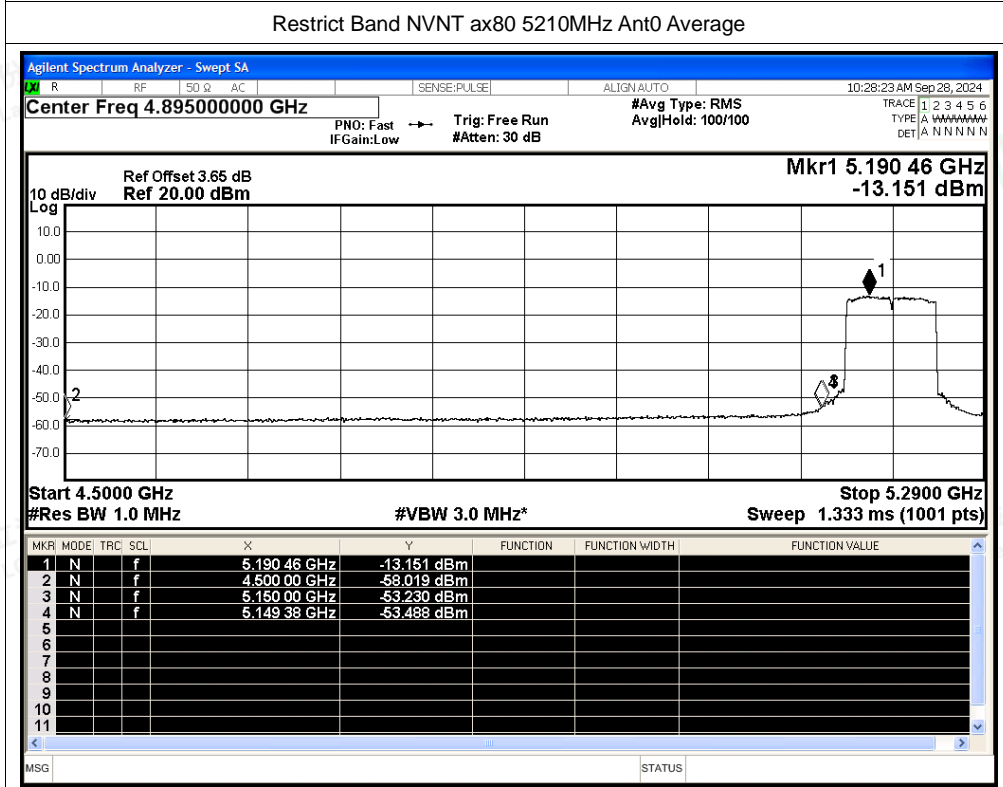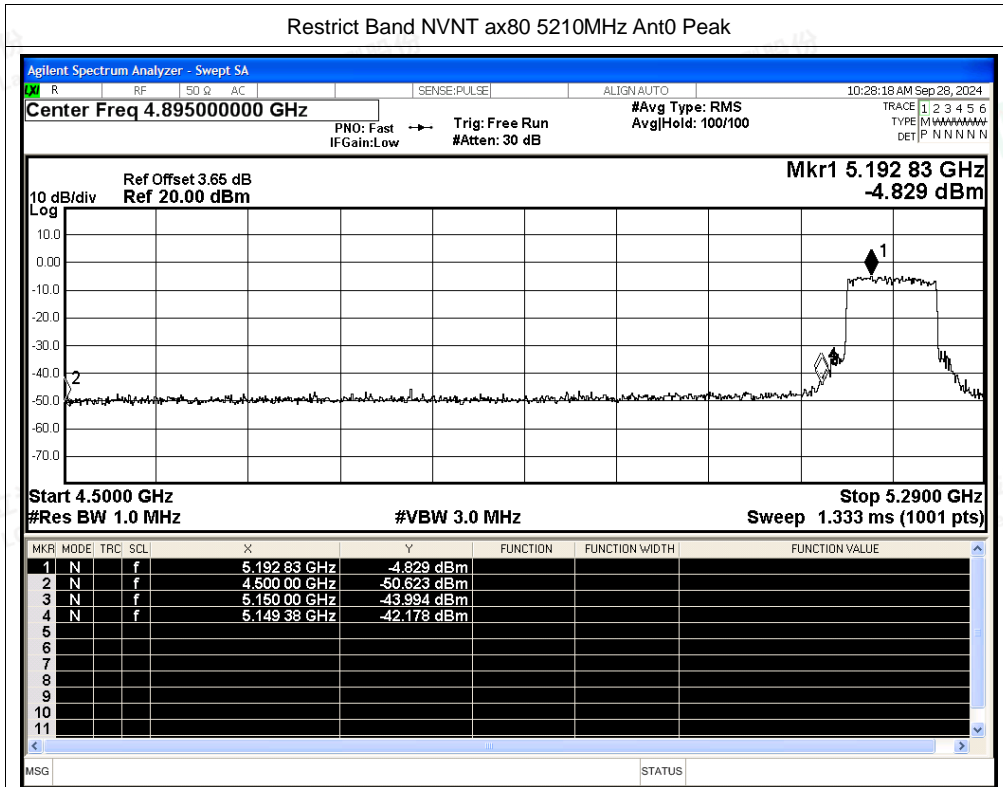



Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBUV/m)	Detector	Limit (dBUV/m)	Verdict
NVNT	a	5180	Ant1	4500	-50.27	2	-	46.96	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-58.19	2	0.24	39.28	Average	54	Pass
NVNT	a	5180	Ant1	5147.5	-43.01	2	-	54.22	Peak	68.2	Pass
NVNT	a	5180	Ant1	5148.9	-53.59	2	0.24	43.88	Average	54	Pass
NVNT	a	5180	Ant1	5150	-44.35	2	-	52.88	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-54.07	2	0.24	43.4	Average	54	Pass
NVNT	a	5240	Ant1	5350	-49.39	2	-	47.84	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-57.09	2	0.24	40.38	Average	54	Pass
NVNT	a	5240	Ant1	5351.52	-46.38	2	-	50.85	Peak	68.2	Pass
NVNT	a	5240	Ant1	5352	-56.75	2	0.24	40.72	Average	54	Pass
NVNT	a	5240	Ant1	5460	-50.05	2	-	47.18	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-58.46	2	0.24	39.01	Average	54	Pass
NVNT	n20	5180	Ant1	4500	-49.79	2	-	47.44	Peak	68.2	Pass
NVNT	n20	5180	Ant1	4500	-58.04	2	0.28	39.47	Average	54	Pass
NVNT	n20	5180	Ant1	5148.2	-42.4	2	-	54.83	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5148.9	-53.43	2	0.28	44.08	Average	54	Pass
NVNT	n20	5180	Ant1	5150	-41.42	2	-	55.81	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5150	-52.71	2	0.28	44.8	Average	54	Pass
NVNT	n20	5240	Ant1	5350	-49.94	2	-	47.29	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350	-56.79	2	0.28	40.72	Average	54	Pass
NVNT	n20	5240	Ant1	5403.12	-46.61	2	-	50.62	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5376.48	-56.63	2	0.28	40.88	Average	54	Pass
NVNT	n20	5240	Ant1	5460	-49.54	2	-	47.69	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5460	-58.19	2	0.28	39.32	Average	54	Pass
NVNT	n40	5190	Ant1	4500	-50.07	2	-	47.16	Peak	68.2	Pass
NVNT	n40	5190	Ant1	4500	-58.23	2	0.12	39.12	Average	54	Pass
NVNT	n40	5190	Ant1	5148.24	-35.54	2	-	61.69	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5149.7	-52.42	2	0.12	44.93	Average	54	Pass
NVNT	n40	5190	Ant1	5150	-40.42	2	-	56.81	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5150	-52.42	2	0.12	44.93	Average	54	Pass
NVNT	n40	5230	Ant1	5350	-50.66	2	-	46.57	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5350	-57.27	2	0.12	40.08	Average	54	Pass
NVNT	n40	5230	Ant1	5458.11	-47.04	2	-	50.19	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5352	-56.97	2	0.12	40.38	Average	54	Pass
NVNT	n40	5230	Ant1	5460	-49.25	2	-	47.98	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5460	-57.85	2	0.12	39.5	Average	54	Pass
NVNT	ac20	5180	Ant1	4500	-49.71	2	-	47.52	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	4500	-58.16	2	0.28	39.35	Average	54	Pass
NVNT	ac20	5180	Ant1	5149.6	-33.64	2	-	63.59	Peak	68.2	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NVNT	ac20	5180	Ant1	5148.9	-52.91	2	0.28	44.6	Average	54	Pass
NVNT	ac20	5180	Ant1	5150	-32.56	2	-	64.67	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5150	-53.14	2	0.28	44.37	Average	54	Pass
NVNT	ac20	5240	Ant1	5350	-49.18	2	-	48.05	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5350	-57.44	2	0.28	40.07	Average	54	Pass
NVNT	ac20	5240	Ant1	5351.04	-46.45	2	-	50.78	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5352.48	-57.02	2	0.28	40.49	Average	54	Pass
NVNT	ac20	5240	Ant1	5460	-51.04	2	-	46.19	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5460	-58.1	2	0.28	39.41	Average	54	Pass
NVNT	ac40	5190	Ant1	4500	-49.71	2	-	47.52	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	4500	-58.27	2	0.12	39.08	Average	54	Pass
NVNT	ac40	5190	Ant1	5148.97	-42.22	2	-	55.01	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5149.7	-52.03	2	0.12	45.32	Average	54	Pass
NVNT	ac40	5190	Ant1	5150	-43.98	2	-	53.25	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5150	-52.03	2	0.12	45.32	Average	54	Pass
NVNT	ac40	5230	Ant1	5350	-49.9	2	-	47.33	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5350	-57.45	2	0.12	39.9	Average	54	Pass
NVNT	ac40	5230	Ant1	5352.54	-46.76	2	-	50.47	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5359.29	-56.96	2	0.12	40.39	Average	54	Pass
NVNT	ac40	5230	Ant1	5460	-51.07	2	-	46.16	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5460	-58.05	2	0.12	39.3	Average	54	Pass
NVNT	ac80	5210	Ant1	5350	-49.46	2	-	47.77	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5350	-57.21	2	0.25	40.27	Average	54	Pass
NVNT	ac80	5210	Ant1	5428.32	-46.27	2	-	50.96	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5360.01	-56.45	2	0.25	41.03	Average	54	Pass
NVNT	ac80	5210	Ant1	5460	-49.4	2	-	47.83	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5460	-57.93	2	0.25	39.55	Average	54	Pass
NVNT	ac80	5210	Ant1	4500	-51.07	2	-	46.16	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	4500	-57.94	2	0.25	39.54	Average	54	Pass
NVNT	ac80	5210	Ant1	5148.59	-43.09	2	-	54.14	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5147.8	-53.21	2	0.25	44.27	Average	54	Pass
NVNT	ac80	5210	Ant1	5150	-41.62	2	-	55.61	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5150	-52.92	2	0.25	44.56	Average	54	Pass
NVNT	ax20	5180	Ant1	4500	-50.03	2	-	47.2	Peak	68.2	Pass
NVNT	ax20	5180	Ant1	4500	-58.32	2	0.28	39.19	Average	54	Pass
NVNT	ax20	5180	Ant1	5148.9	-32.25	2	-	64.98	Peak	68.2	Pass
NVNT	ax20	5180	Ant1	5148.9	-52.38	2	0.28	45.13	Average	54	Pass
NVNT	ax20	5180	Ant1	5150	-34.67	2	-	62.56	Peak	68.2	Pass
NVNT	ax20	5180	Ant1	5150	-51.78	2	0.28	45.73	Average	54	Pass
NVNT	ax20	5240	Ant1	5350	-49.85	2	-	47.38	Peak	68.2	Pass
NVNT	ax20	5240	Ant1	5350	-57.07	2	0.28	40.44	Average	54	Pass
NVNT	ax20	5240	Ant1	5403.36	-46.9	2	-	50.33	Peak	68.2	Pass
NVNT	ax20	5240	Ant1	5350.32	-56.57	2	0.28	40.94	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




NVNT	ax20	5240	Ant1	5460	-48.95	2	-	48.28	Peak	68.2	Pass
NVNT	ax20	5240	Ant1	5460	-57.78	2	0.28	39.73	Average	54	Pass
NVNT	ax40	5190	Ant1	4500	-50.25	2	-	46.98	Peak	68.2	Pass
NVNT	ax40	5190	Ant1	4500	-57.92	2	0.12	39.43	Average	54	Pass
NVNT	ax40	5190	Ant1	5147.51	-39.13	2	-	58.1	Peak	68.2	Pass
NVNT	ax40	5190	Ant1	5149.7	-52.75	2	0.12	44.6	Average	54	Pass
NVNT	ax40	5190	Ant1	5150	-40.99	2	-	56.24	Peak	68.2	Pass
NVNT	ax40	5190	Ant1	5150	-52.75	2	0.12	44.6	Average	54	Pass
NVNT	ax40	5230	Ant1	5350	-50.15	2	-	47.08	Peak	68.2	Pass
NVNT	ax40	5230	Ant1	5350	-57.79	2	0.12	39.56	Average	54	Pass
NVNT	ax40	5230	Ant1	5360.1	-47.12	2	-	50.11	Peak	68.2	Pass
NVNT	ax40	5230	Ant1	5351.19	-56.76	2	0.12	40.59	Average	54	Pass
NVNT	ax40	5230	Ant1	5460	-50.85	2	-	46.38	Peak	68.2	Pass
NVNT	ax40	5230	Ant1	5460	-57.73	2	0.12	39.62	Average	54	Pass
NVNT	ax80	5210	Ant1	5350	-48.35	2	-	48.88	Peak	68.2	Pass
NVNT	ax80	5210	Ant1	5350	-57.06	2	0.25	40.42	Average	54	Pass
NVNT	ax80	5210	Ant1	5393.34	-46.96	2	-	50.27	Peak	68.2	Pass
NVNT	ax80	5210	Ant1	5350.77	-56.44	2	0.25	41.04	Average	54	Pass
NVNT	ax80	5210	Ant1	5460	-49.59	2	-	47.64	Peak	68.2	Pass
NVNT	ax80	5210	Ant1	5460	-57.31	2	0.25	40.17	Average	54	Pass
NVNT	ax80	5210	Ant1	4500	-51.18	2	-	46.05	Peak	68.2	Pass
NVNT	ax80	5210	Ant1	4500	-58.14	2	0.25	39.34	Average	54	Pass
NVNT	ax80	5210	Ant1	5147.8	-41.97	2	-	55.26	Peak	68.2	Pass
NVNT	ax80	5210	Ant1	5149.38	-53.63	2	0.25	43.85	Average	54	Pass
NVNT	ax80	5210	Ant1	5150	-40.94	2	-	56.29	Peak	68.2	Pass
NVNT	ax80	5210	Ant1	5150	-53.21	2	0.25	44.27	Average	54	Pass






Test Graphs

Restrict Band NVNT a 5180MHz Ant1 Peak

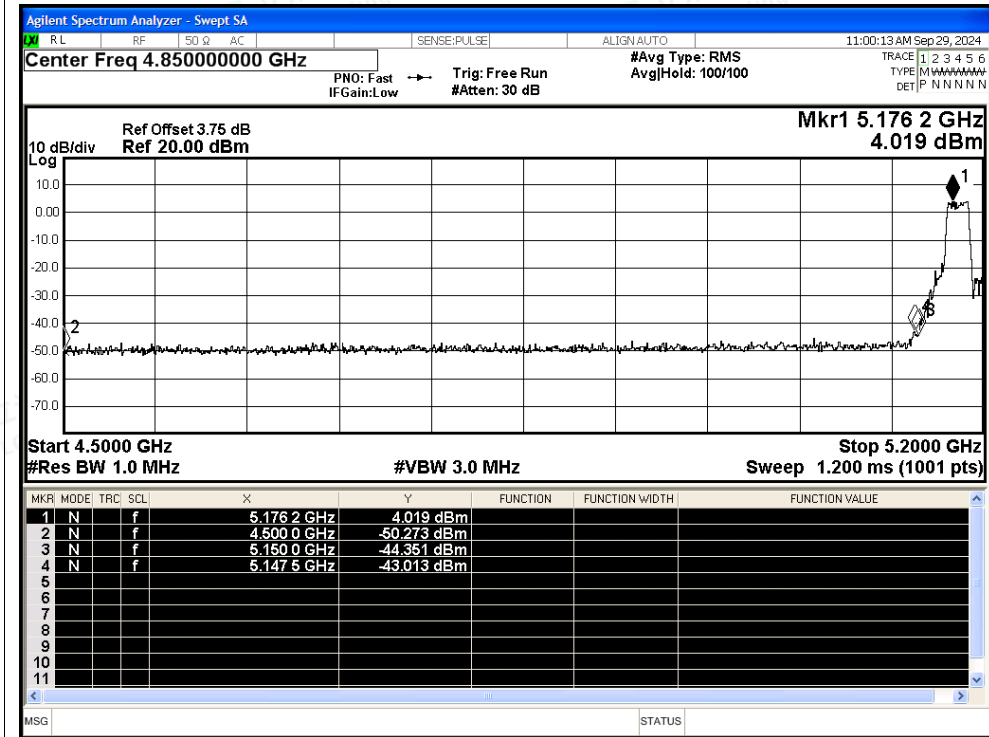


Restrict Band NVNT a 5180MHz Ant1 Average

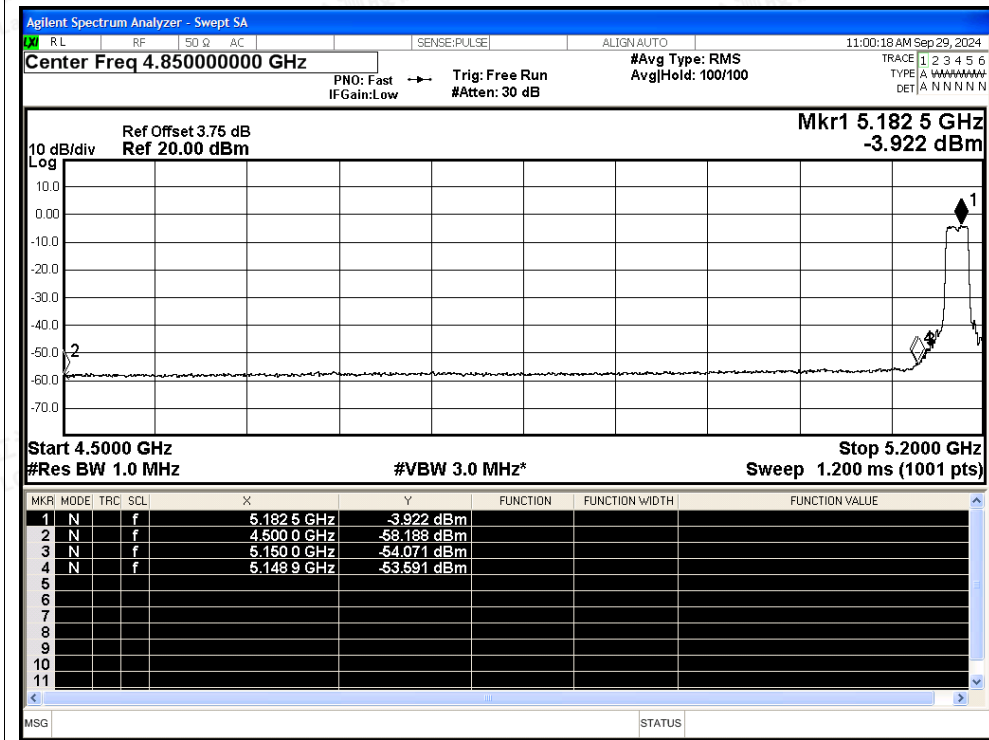




Restrict Band NVNT a 5240MHz Ant1 Peak

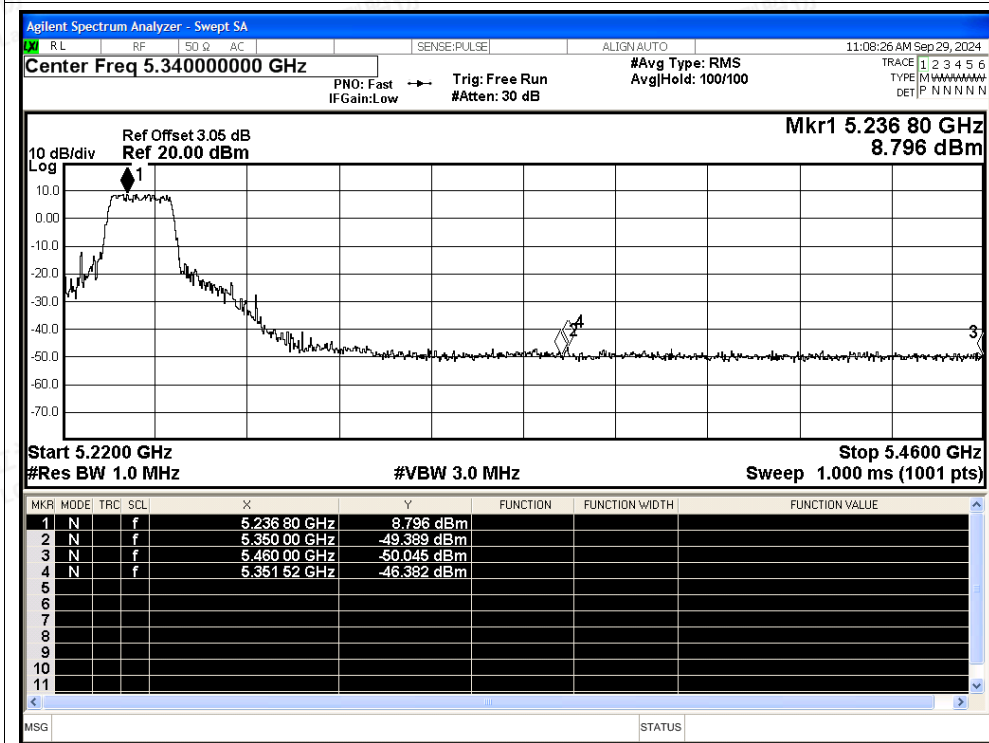


Restrict Band NVNT a 5240MHz Ant1 Average

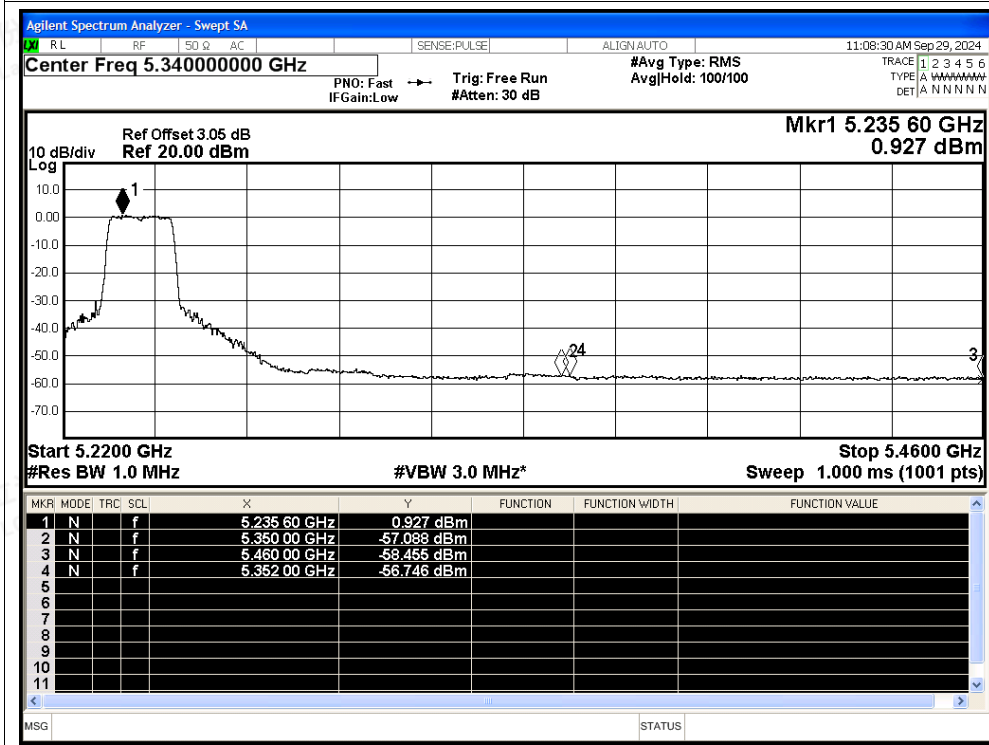




Restrict Band NVNT n20 5180MHz Ant1 Peak

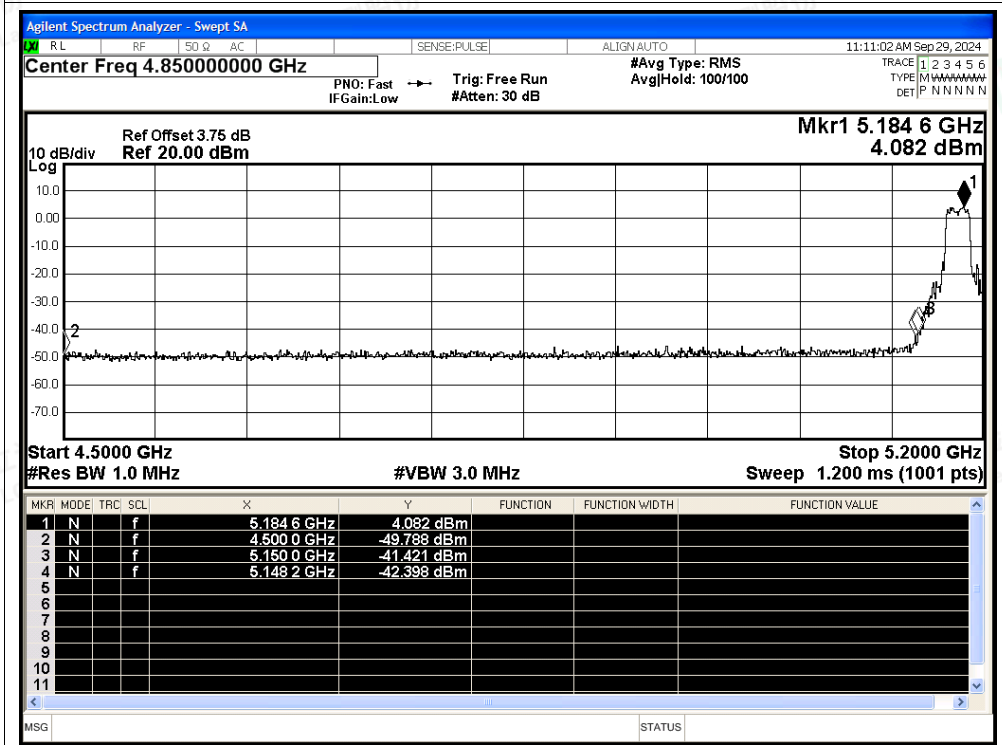

Restrict Band NVNT n20 5180MHz Ant1 Average

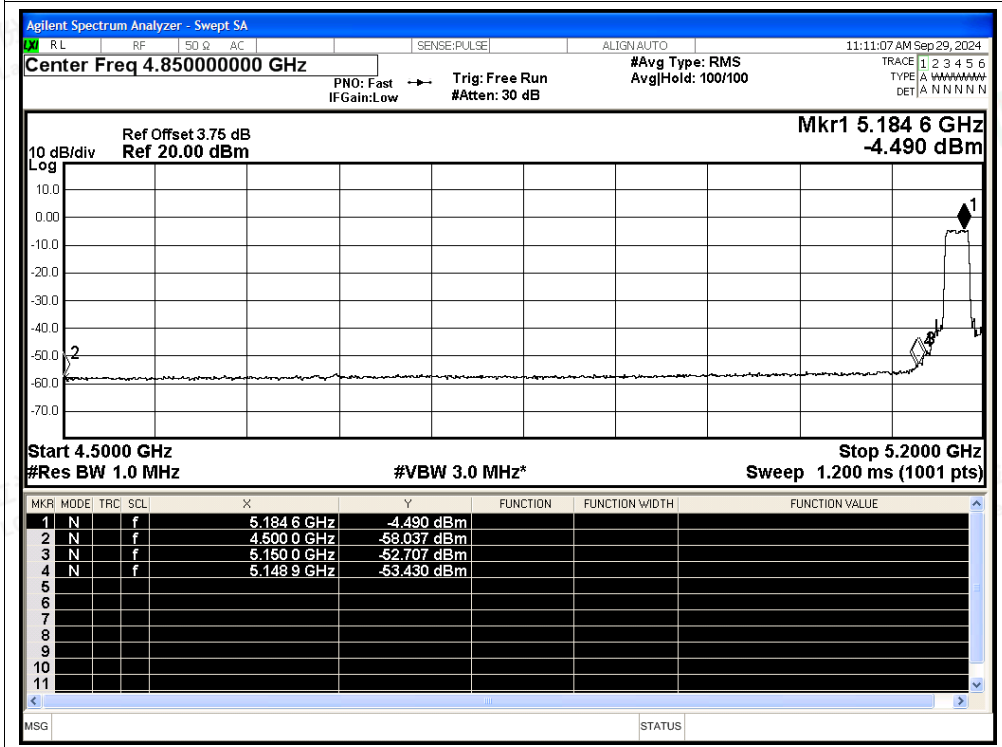

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT n20 5240MHz Ant1 Peak

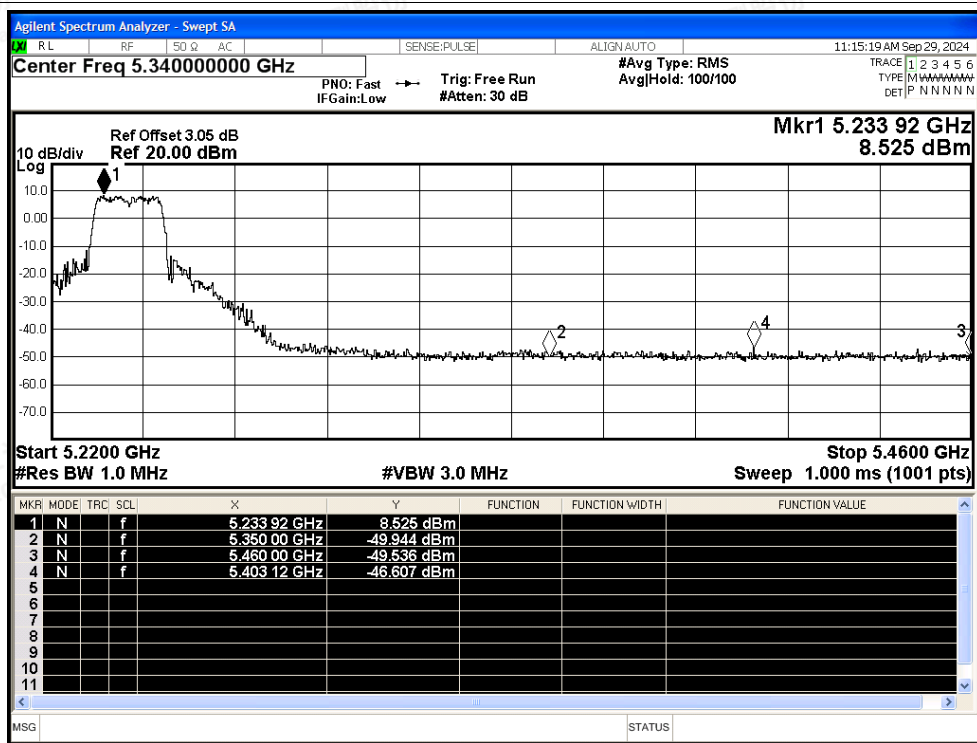


Restrict Band NVNT n20 5240MHz Ant1 Average

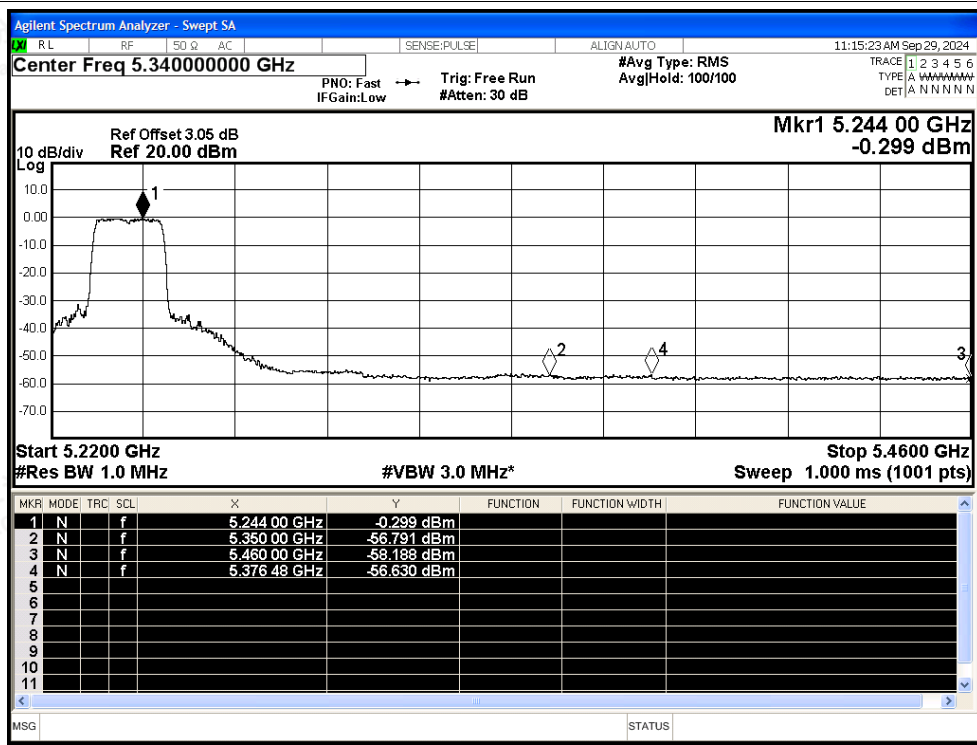




Restrict Band NVNT n40 5190MHz Ant1 Peak

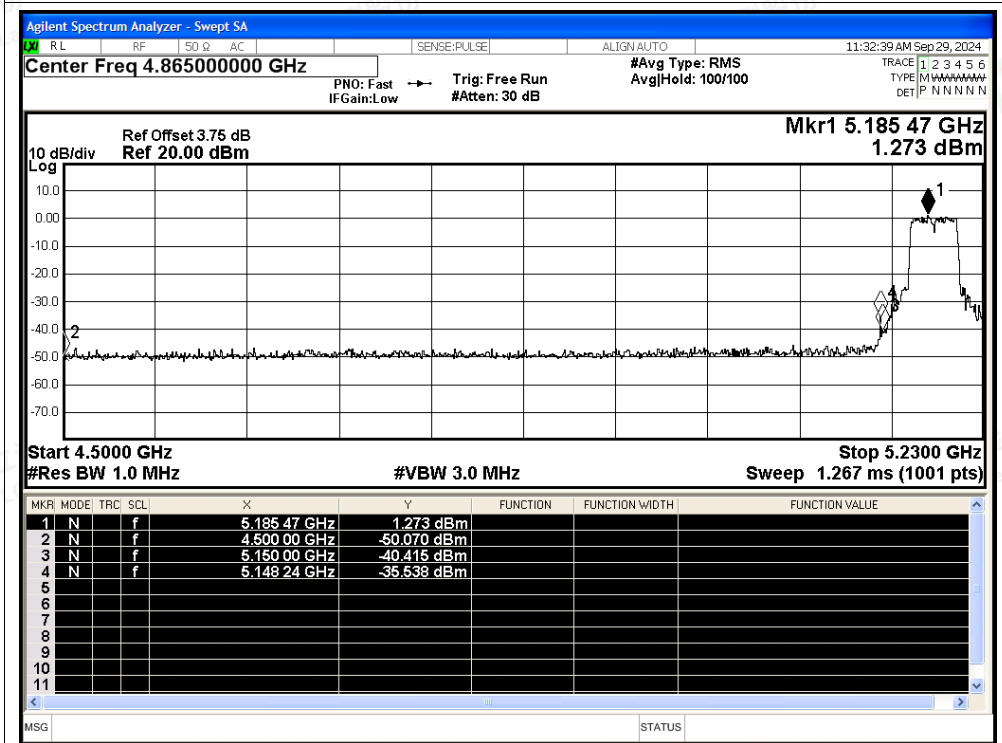


Restrict Band NVNT n40 5190MHz Ant1 Average

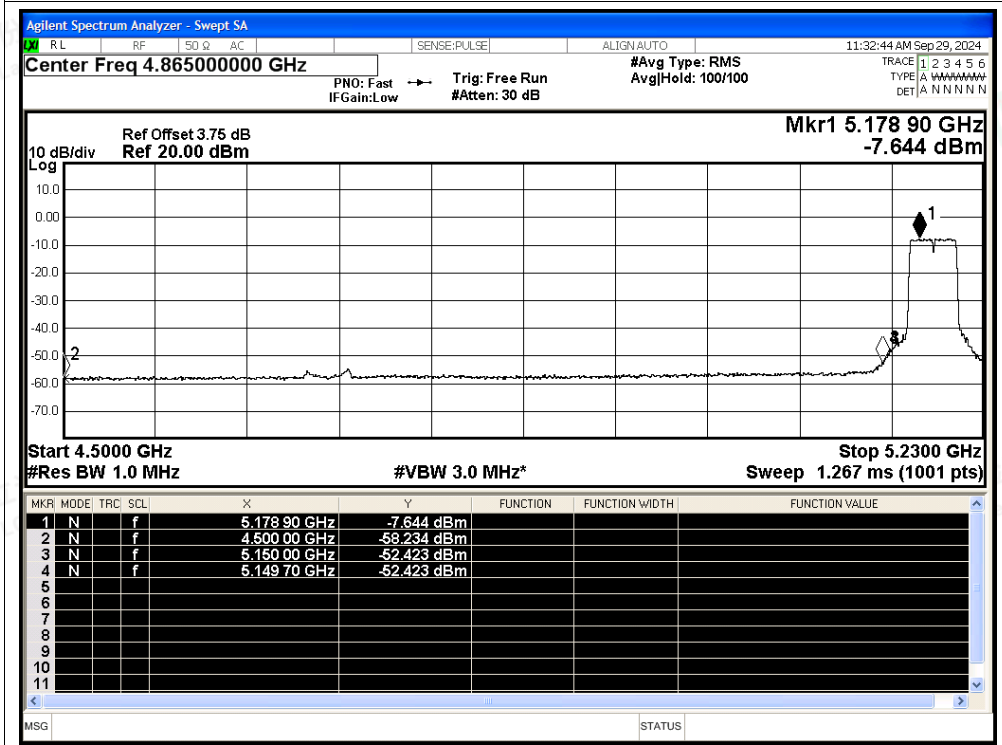






Restrict Band NVNT n40 5230MHz Ant1 Peak

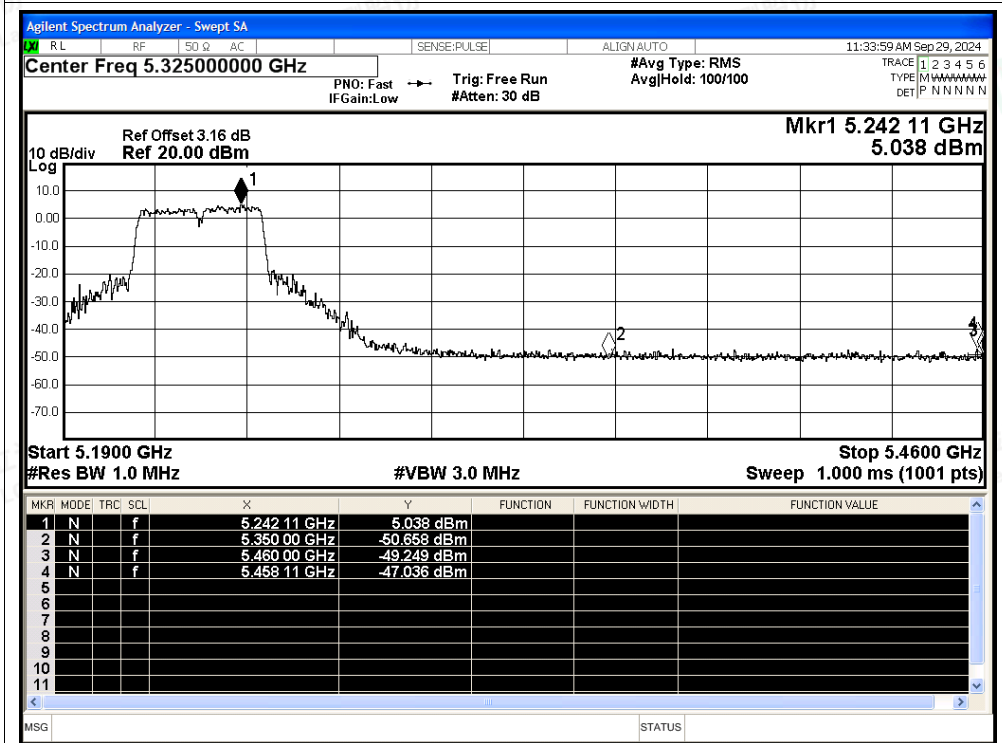


Restrict Band NVNT n40 5230MHz Ant1 Average

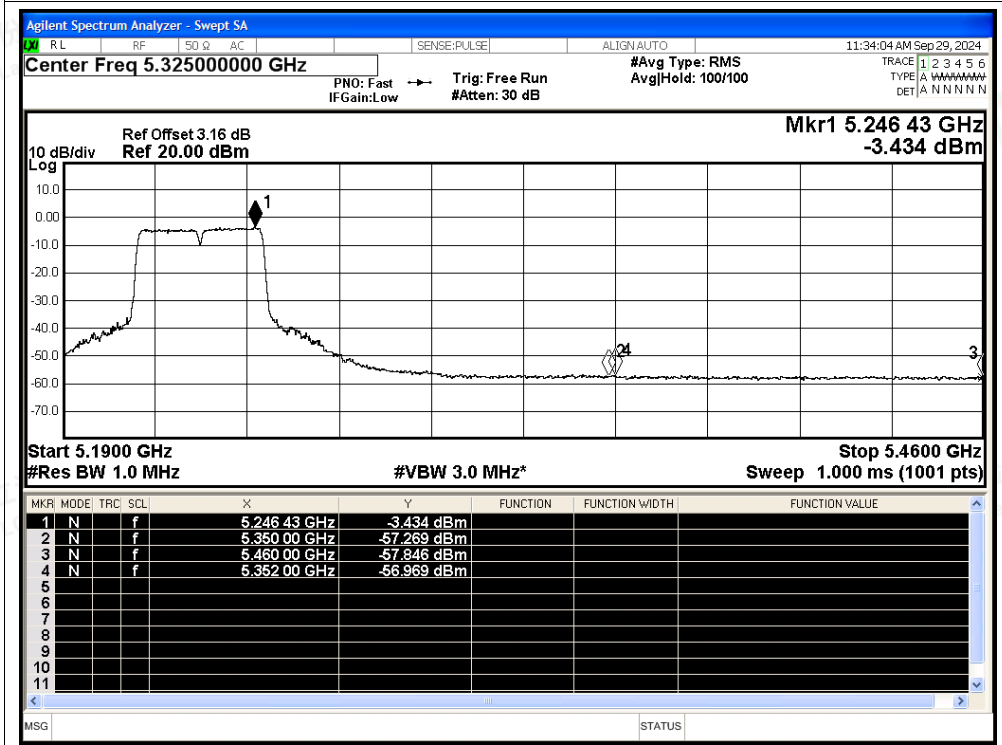

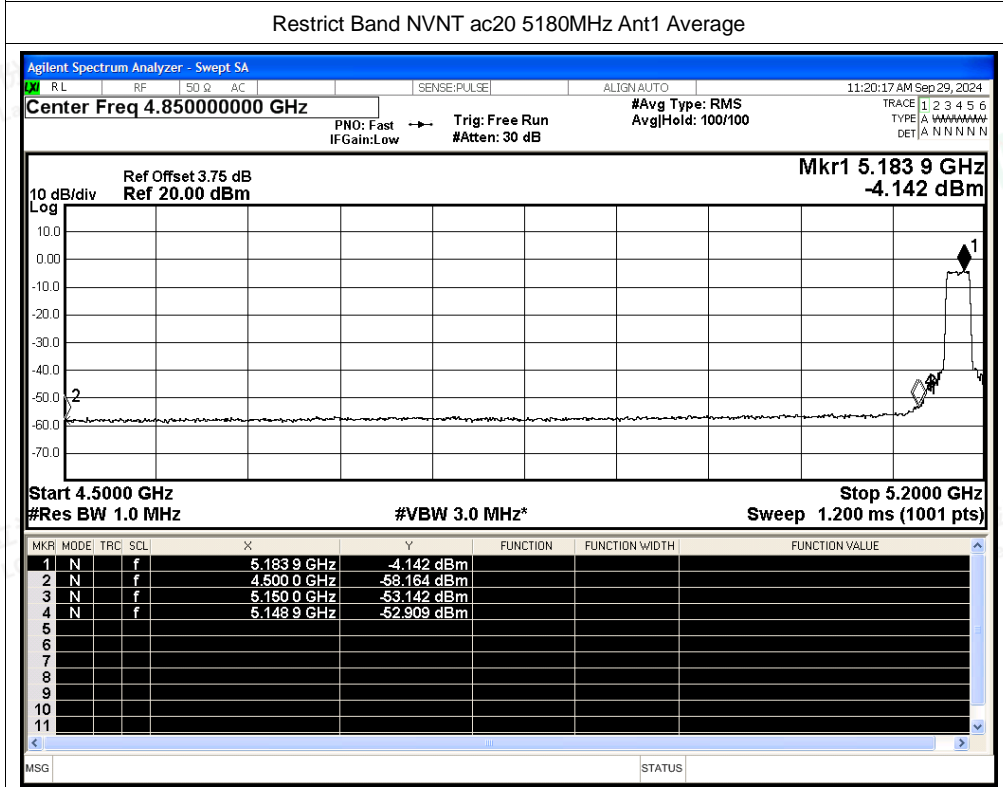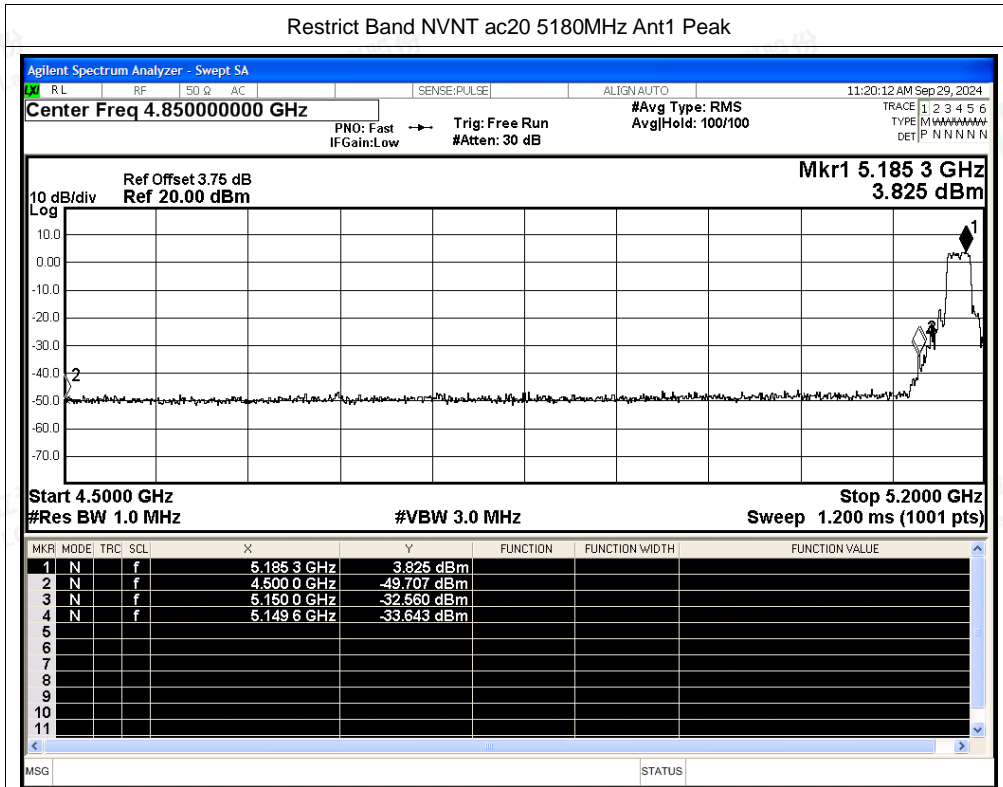




Restrict Band NVNT ac20 5240MHz Ant1 Peak

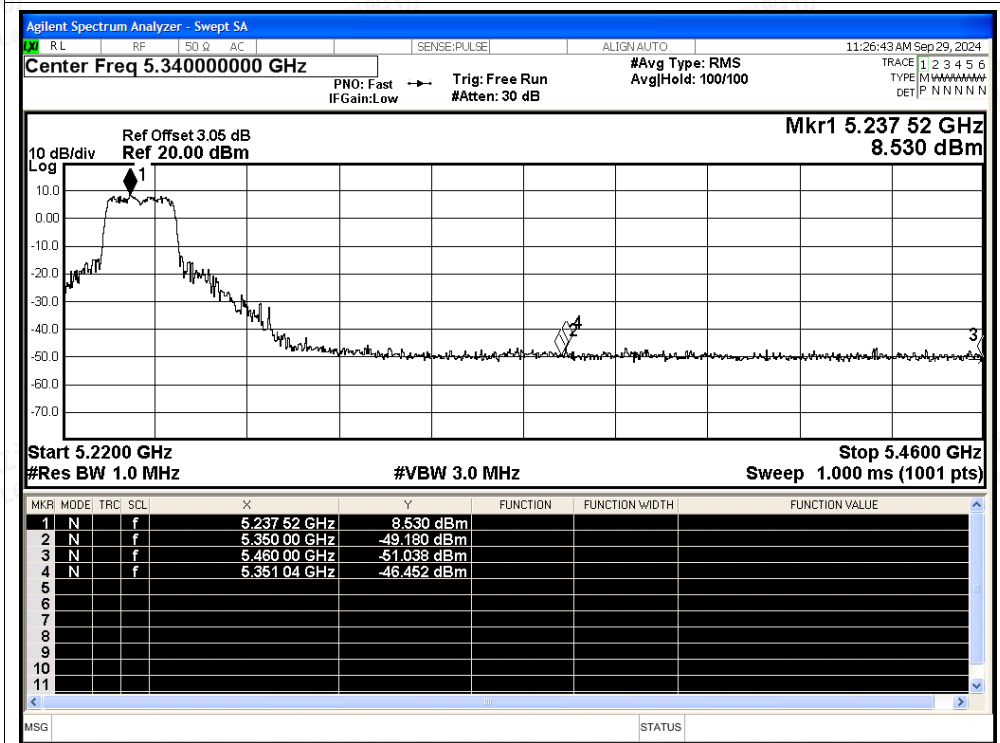


Restrict Band NVNT ac20 5240MHz Ant1 Average

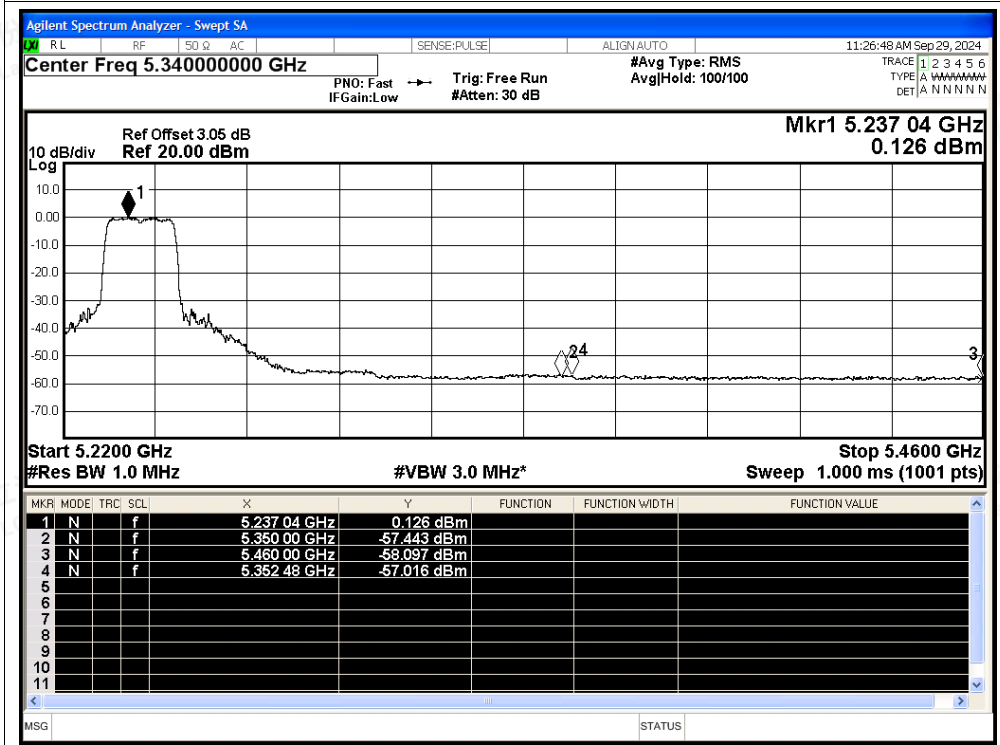



Restrict Band NVNT ac40 5190MHz Ant1 Peak

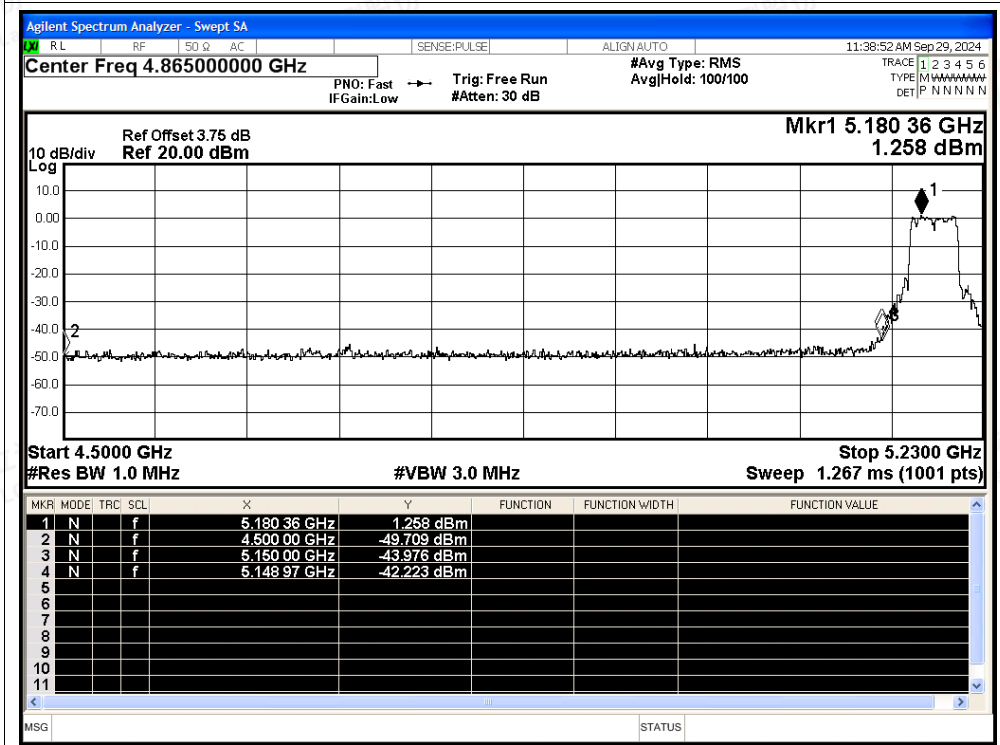

Restrict Band NVNT ac40 5190MHz Ant1 Average

