
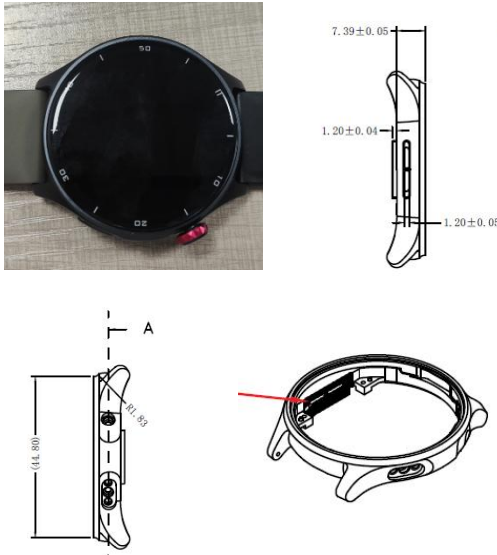
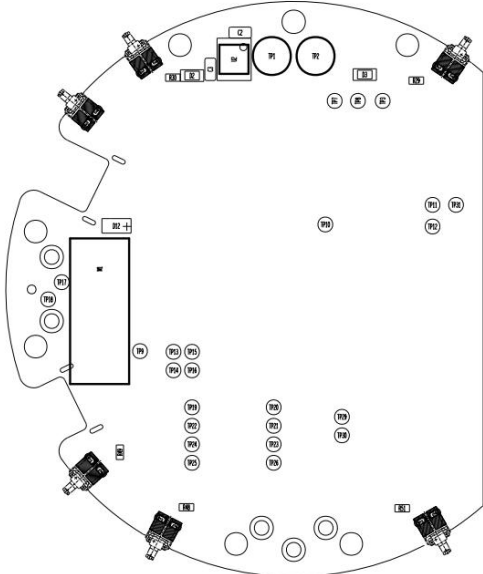


Technical Specification																																											
Antenna Mode	CW06	Manufactured	SHENZHEN HENGXIANGTONG ANTENNA TECNOLOGY CO., LTD.																																								
Address	606, Building E, Enterprise Aviation Technology Innovation Research and Development Industrial Park, No. 1008, Songbai Road, Sunshine Community, Xili Street, Nanshan District, Shenzhen																																										
Size & Picture	UNIT :MM 																																										
	Antenna matching circuit		<table><tr><th colspan="2">主射频匹配</th></tr><tr><th>位号</th><th>匹配值更改</th></tr><tr><td>C43</td><td>1.8pF</td></tr><tr><td>L7</td><td>0Ω</td></tr><tr><td>C44</td><td>4.7nh</td></tr><tr><td>R52</td><td>0Ω</td></tr><tr><td></td><td></td></tr><tr><th colspan="2">地弹片匹配</th></tr><tr><td>R29</td><td>0Ω</td></tr><tr><td>R30</td><td>NC</td></tr><tr><td>R48</td><td>0Ω</td></tr><tr><td>R49</td><td>NC</td></tr><tr><td>R51</td><td>0Ω</td></tr><tr><td></td><td></td></tr><tr><td>J1</td><td>贴</td></tr><tr><td>J2</td><td>贴</td></tr><tr><td>J4</td><td>NC</td></tr><tr><td>J7</td><td>贴</td></tr><tr><td>J8</td><td>NC</td></tr><tr><td>J10</td><td>贴</td></tr></table>	主射频匹配		位号	匹配值更改	C43	1.8pF	L7	0Ω	C44	4.7nh	R52	0Ω			地弹片匹配		R29	0Ω	R30	NC	R48	0Ω	R49	NC	R51	0Ω			J1	贴	J2	贴	J4	NC	J7	贴	J8	NC	J10	贴
	主射频匹配																																										
位号	匹配值更改																																										
C43	1.8pF																																										
L7	0Ω																																										
C44	4.7nh																																										
R52	0Ω																																										
地弹片匹配																																											
R29	0Ω																																										
R30	NC																																										
R48	0Ω																																										
R49	NC																																										
R51	0Ω																																										
J1	贴																																										
J2	贴																																										
J4	NC																																										
J7	贴																																										
J8	NC																																										
J10	贴																																										
	BT: LOOP																																										

Band		Mode	Name	Frequency	Antenna Type	Antenna Max Gain	
BT	☒ Bluetooth			2400-2500	Metal frame antenna	-0.52	dBi

BT 3-D Patten Plots

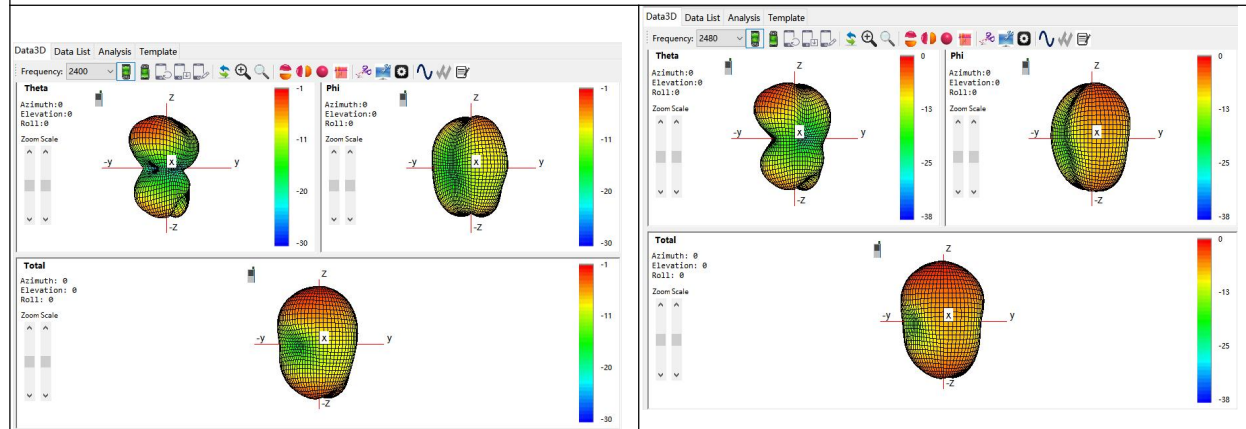

BT: 2400Mhz-2480Mhz

Passive Test For BT			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	20.89	-6.8	-1.74
2410	21.14	-6.75	-1.67
2420	22.53	-6.47	-1.42
2430	22.82	-6.42	-1.31
2440	23.81	-6.23	-1.07
2450	24.14	-6.17	-0.92
2460	24.51	-6.11	-0.68
2470	25.22	-5.98	-0.76
2480	25.87	-5.87	-0.52
2490	26.81	-5.72	-0.44
2500	27.94	-5.54	-0.39