



Appendix C

RF Test Data for 2.4GWIFI(Conducted Measurement)

Product Name: Mini PC

Trade Mark: Blackview

Test Model: MP20

Environmental Conditions

Temperature:	24.4 °C
Relative Humidity:	52.3%
ATM Pressure:	101Kpa
Test Engineer:	Emiya lin
Supervised by:	Simba Haung



Contents

	Page
COVER PAGE	
1 Duty Cycle	3
1.1 Test Result	3
1.2 Test Graphs	4
2 Maximum Conducted Output Power	22
2.1 Test Result	22
3 -6dB Bandwidth	24
3.1 Test Result	24
3.2 Test Graphs	25
4 Maximum Power Spectral Density Level	43
4.1 Test Result	43
4.2 Test Graphs	45
5 Band Edge	63
5.1 Test Result	63
5.2 Test Graphs	64
6 Conducted RF Spurious Emission	88
6.1 Test Result	88
6.2 Test Graphs	90





1 Duty Cycle


1.1 Test Result


Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor	1/T (kHz)
b	2412	Ant1	77.56	1.1	0.12
b	2437	Ant1	76.28	1.18	0.12
b	2462	Ant1	77.55	1.1	0.12
g	2412	Ant1	77.56	1.1	0.12
g	2437	Ant1	76.28	1.18	0.12
g	2462	Ant1	77.55	1.1	0.12
n20	2412	Ant1	38.25	4.17	0.66
n20	2437	Ant1	37.7	4.24	0.66
n20	2462	Ant1	38.2	4.18	0.66
n40	2422	Ant1	33.34	4.77	0.82
n40	2437	Ant1	33.31	4.77	0.81
n40	2452	Ant1	32.96	4.82	0.83
ax20	2412	Ant1	35.75	4.47	0.72
ax20	2437	Ant1	35.72	4.47	0.72
ax20	2462	Ant1	35.72	4.47	0.72
ax40	2422	Ant1	31.66	5	0.86
ax40	2437	Ant1	31.7	4.99	0.86
ax40	2452	Ant1	31.5	5.02	0.87
b	2412	Ant2	77.54	1.1	0.12
b	2437	Ant2	77.17	1.13	0.12
b	2462	Ant2	75.1	1.24	0.12
g	2412	Ant2	77.54	1.1	0.12
g	2437	Ant2	77.17	1.13	0.12
g	2462	Ant2	75.1	1.24	0.12
n20	2412	Ant2	38.01	4.2	0.66
n20	2437	Ant2	38.31	4.17	0.66
n20	2462	Ant2	37.7	4.24	0.66
n40	2422	Ant2	32.46	4.89	0.82
n40	2437	Ant2	33.12	4.8	0.83
n40	2452	Ant2	33.12	4.8	0.83
ax20	2412	Ant2	36.22	4.41	0.72
ax20	2437	Ant2	35.75	4.47	0.72
ax20	2462	Ant2	35.52	4.5	0.72
ax40	2422	Ant2	31.5	5.02	0.86
ax40	2437	Ant2	31.48	5.02	0.87
ax40	2452	Ant2	31.9	4.96	0.87


1.2 Test Graphs

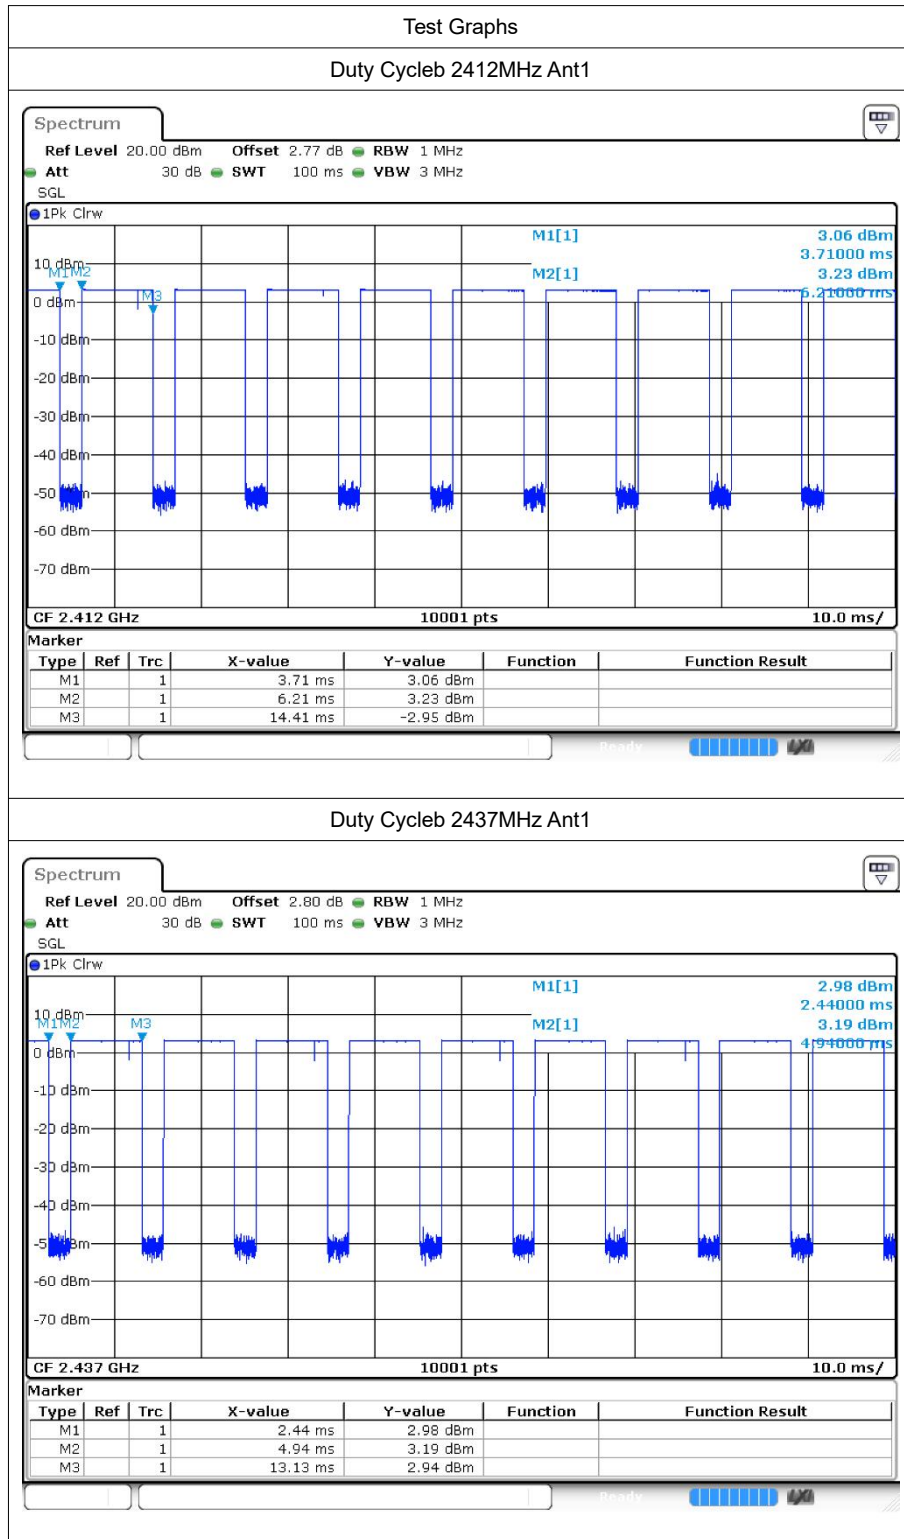


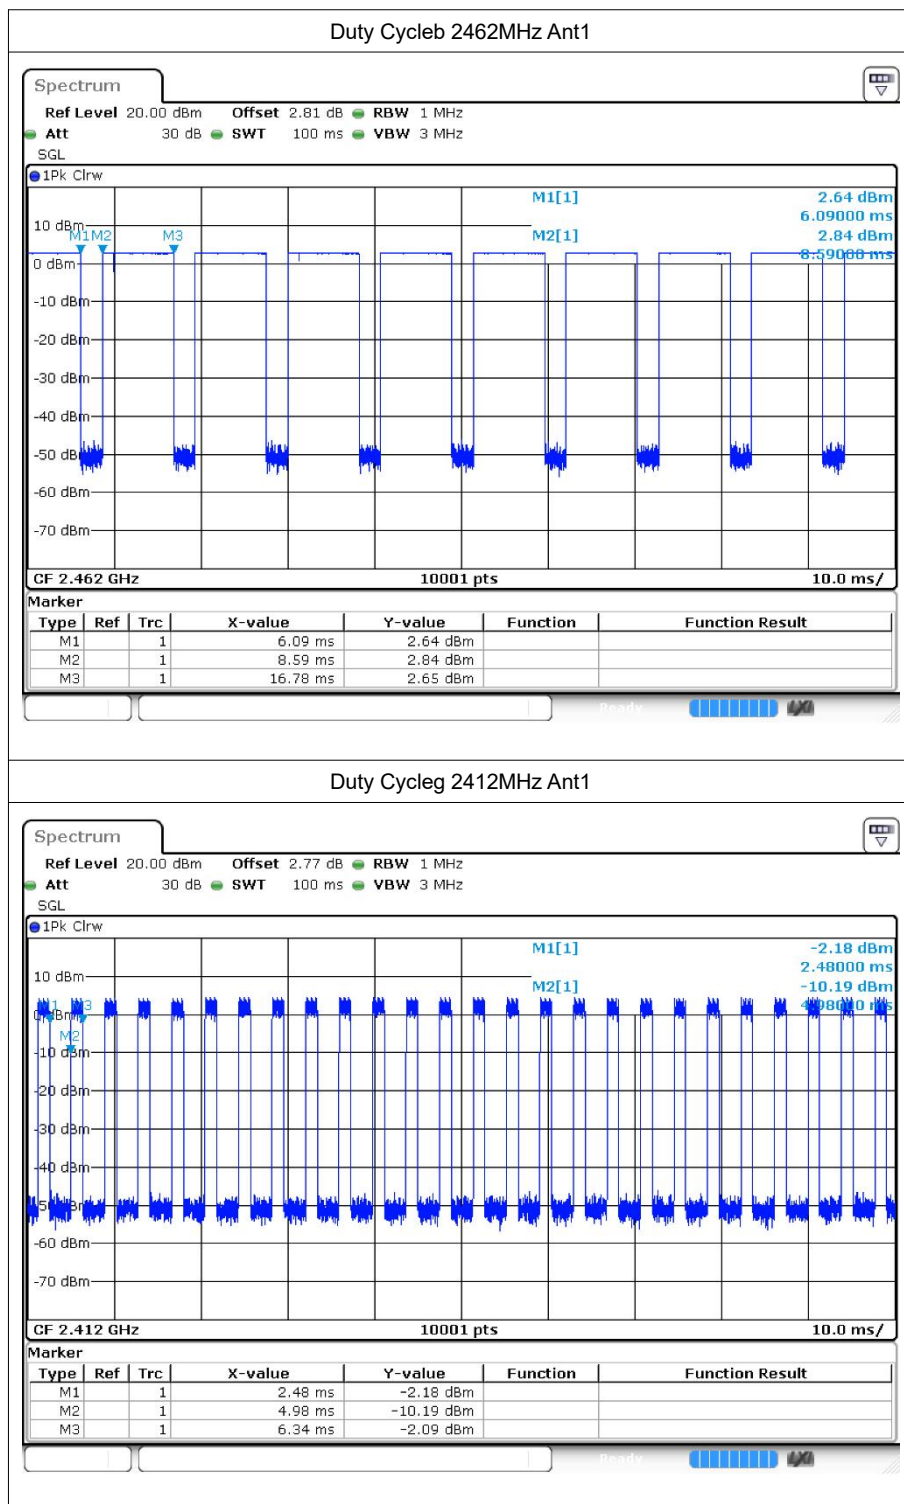

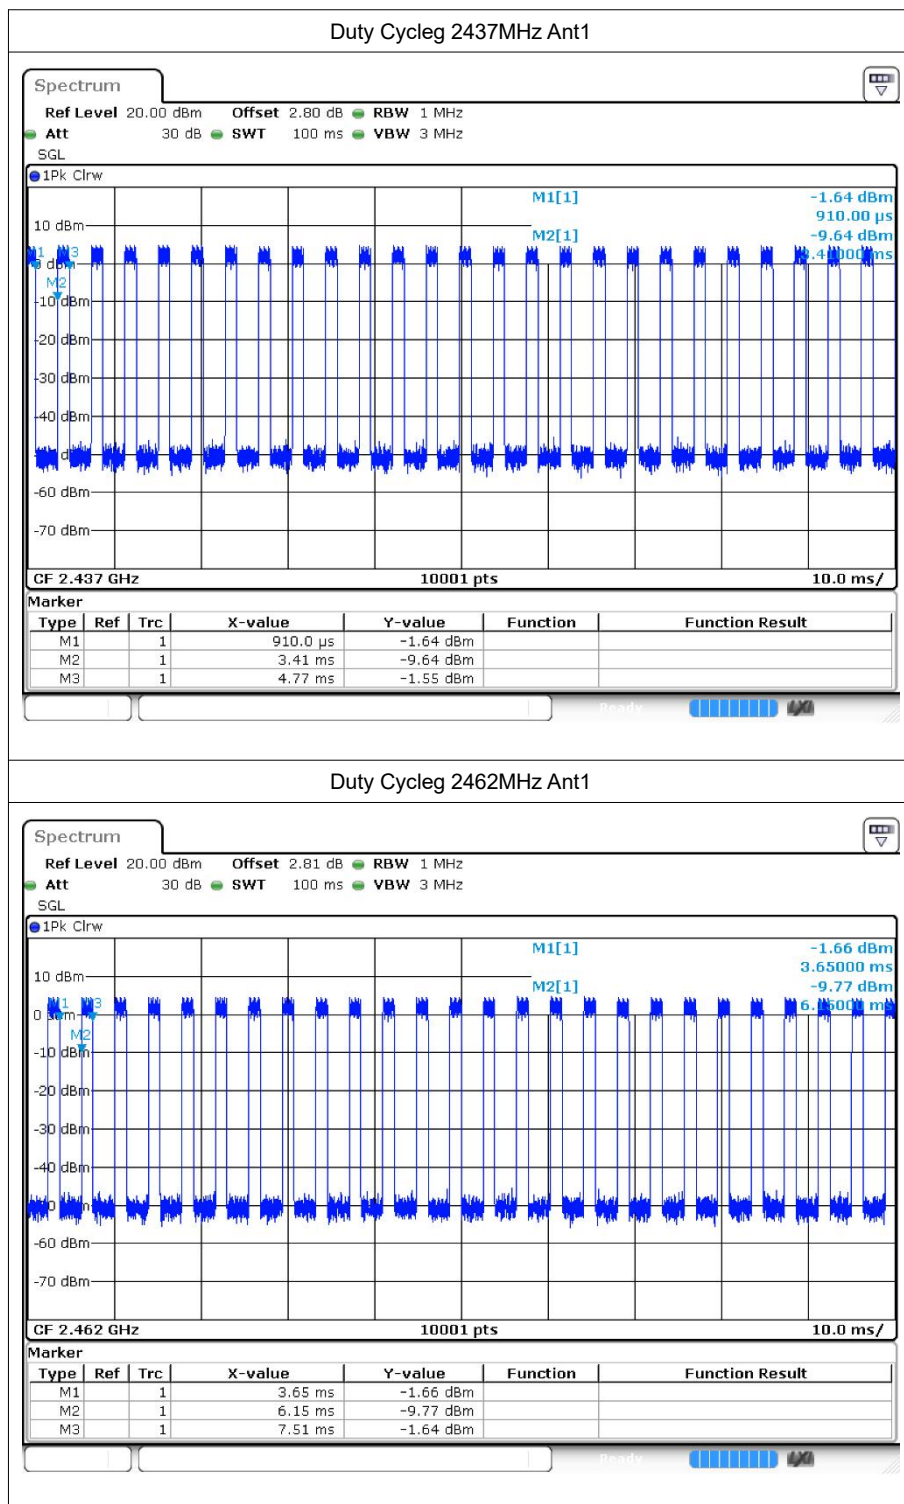

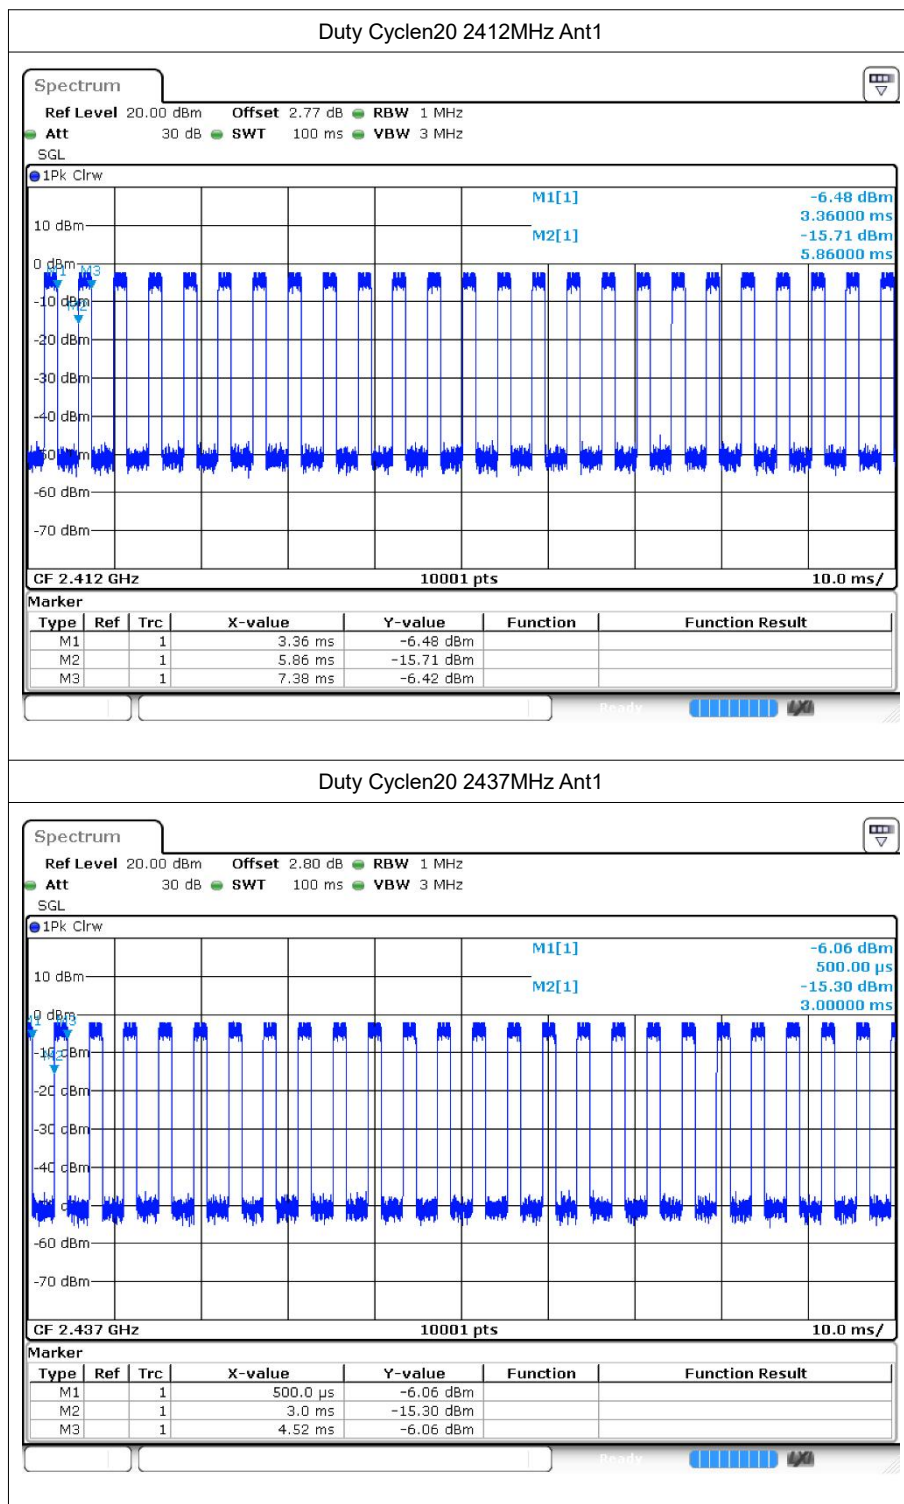

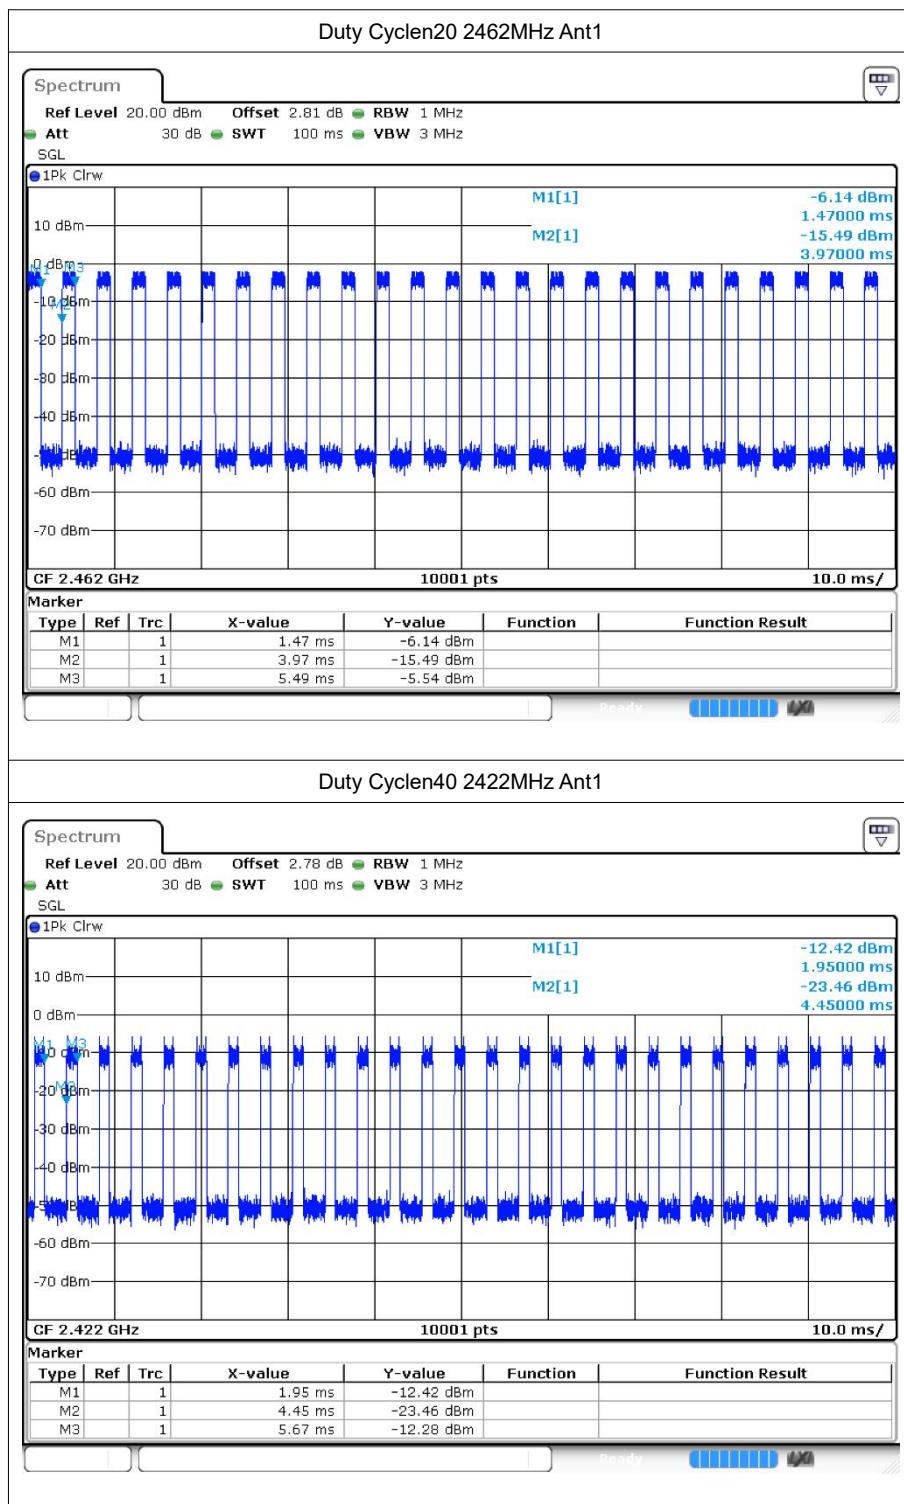


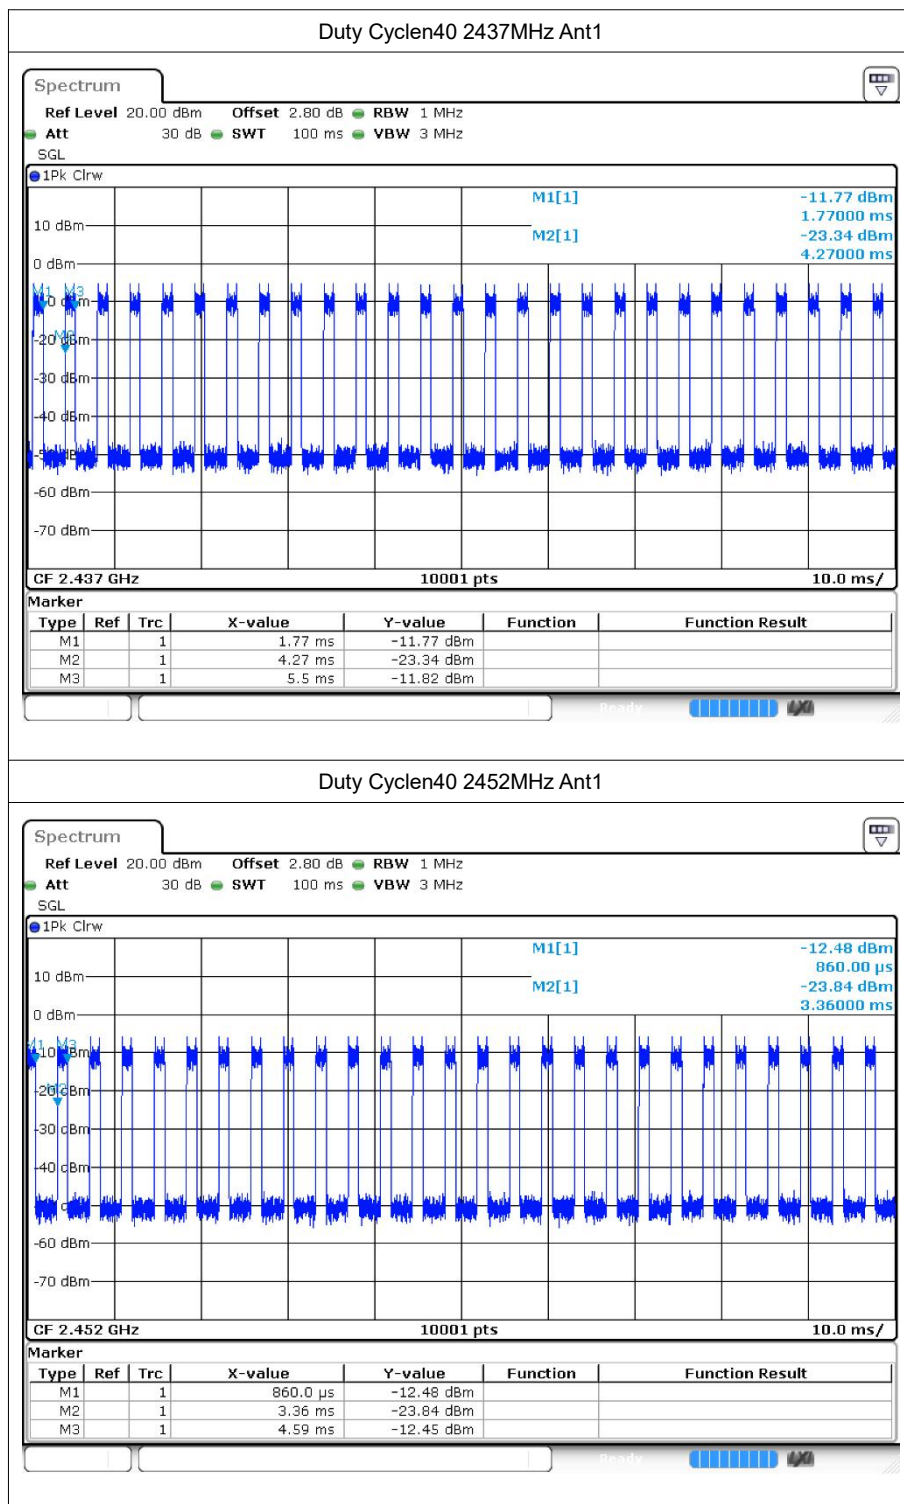





Test Graphs


Duty Cycle 2412MHz Ant2

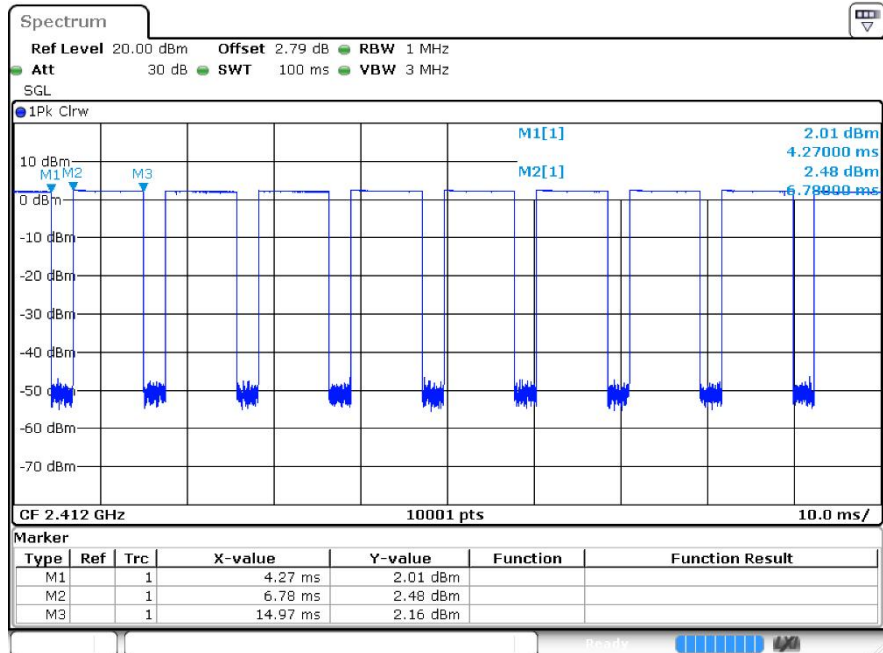



Duty Cycle 2437MHz Ant2

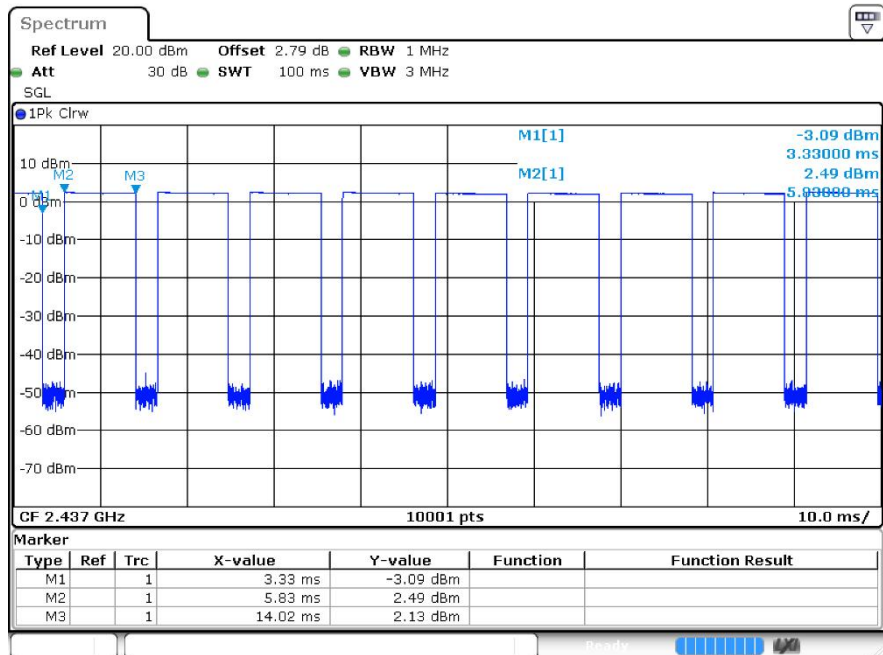


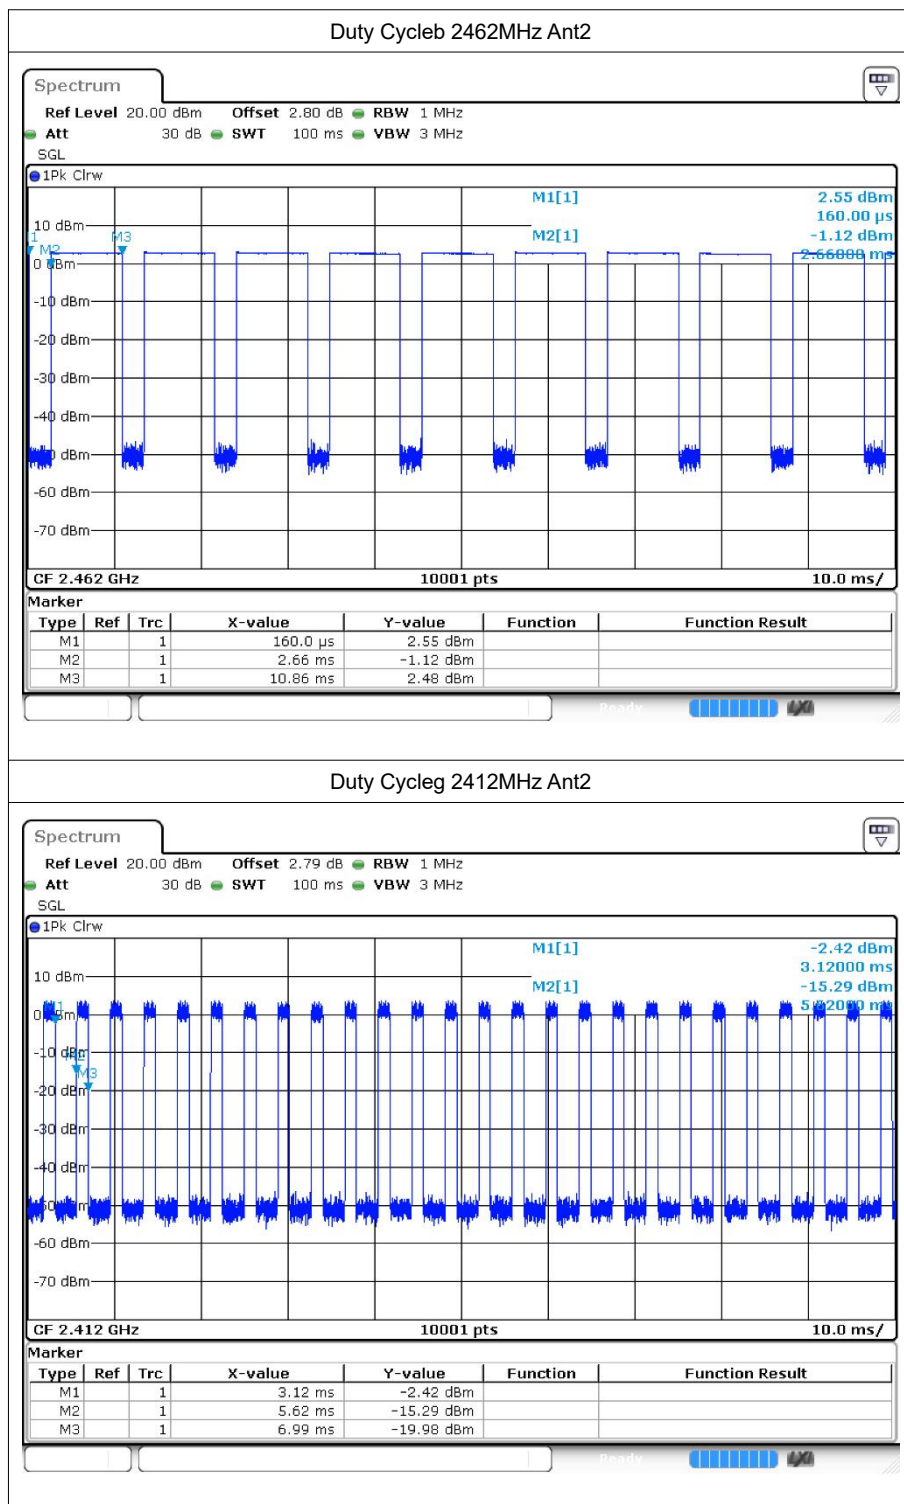

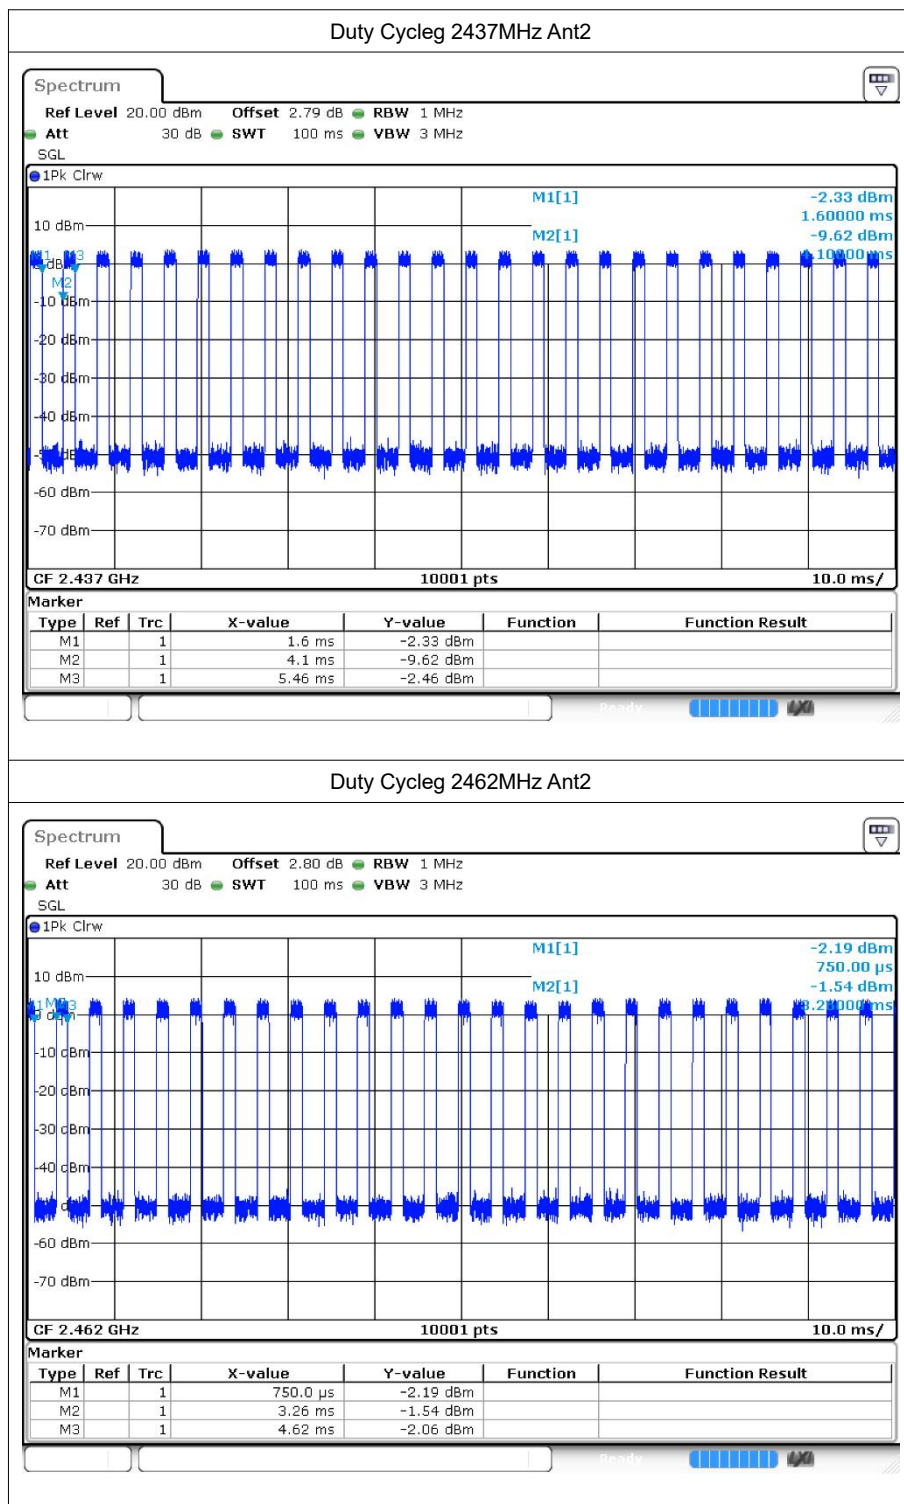

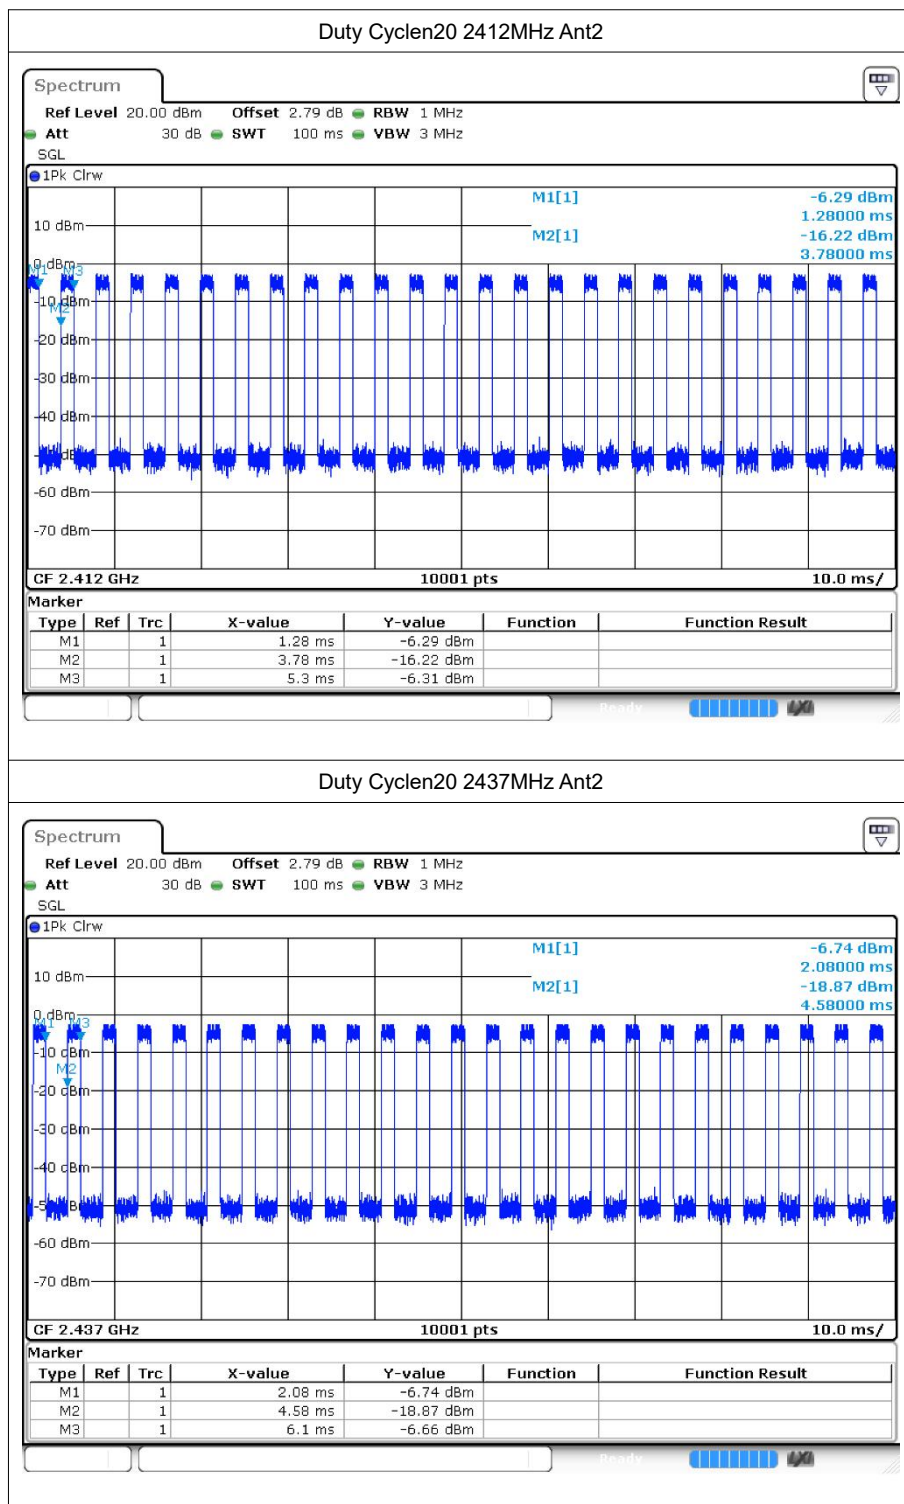


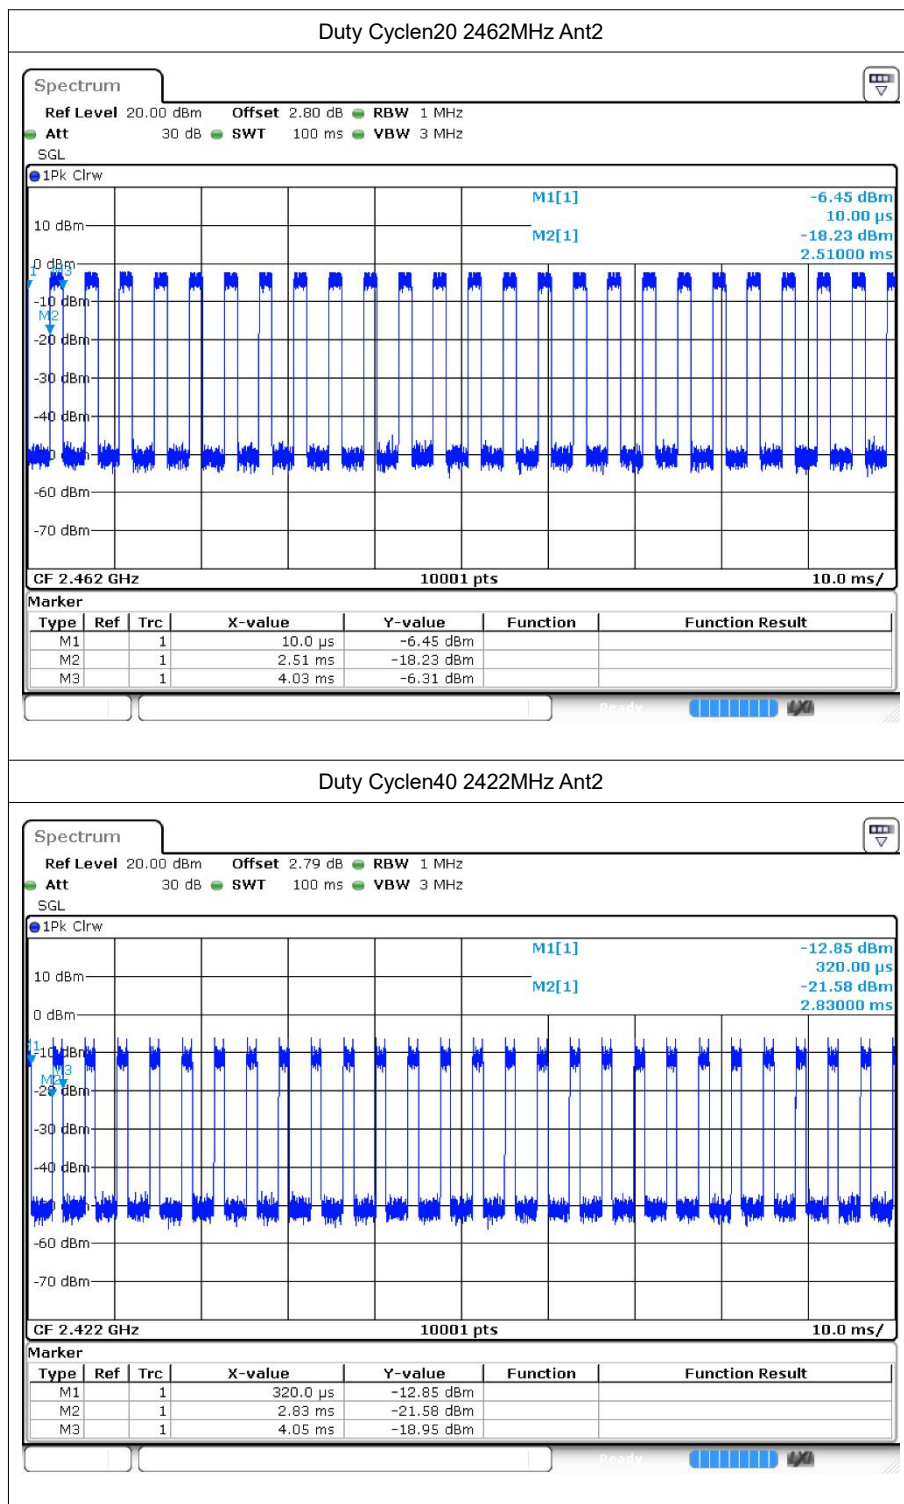

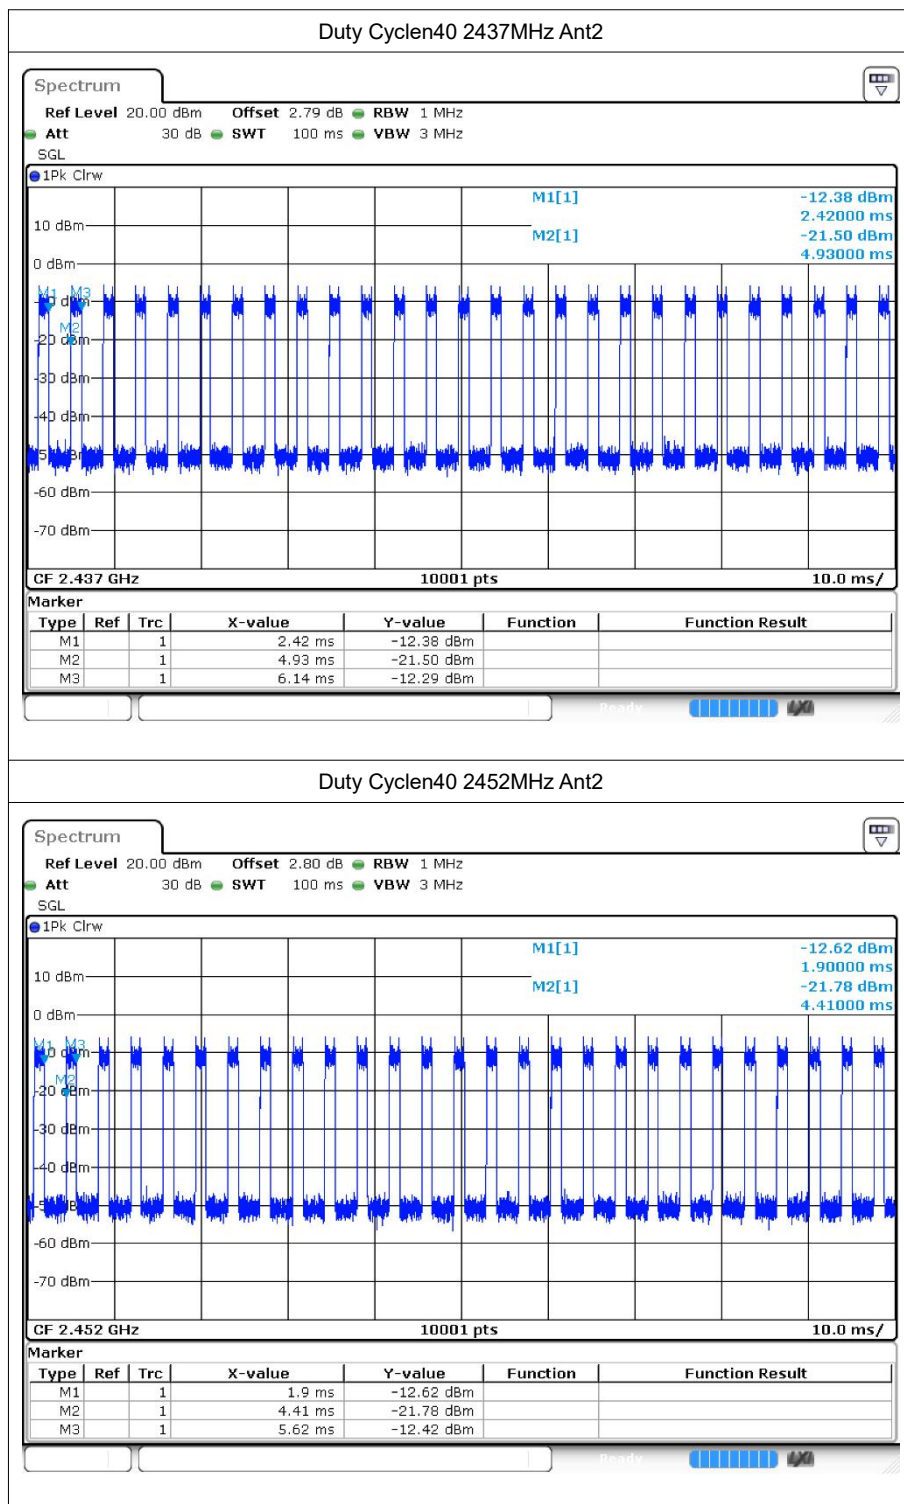






Duty Cycleax20 2412MHz Ant1

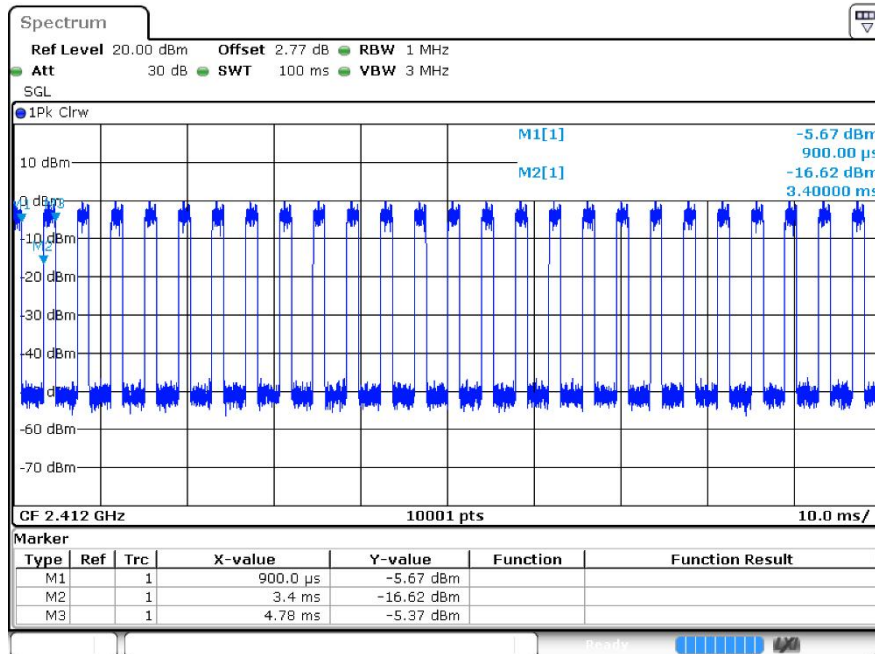



Duty Cycleax20 2437MHz Ant1

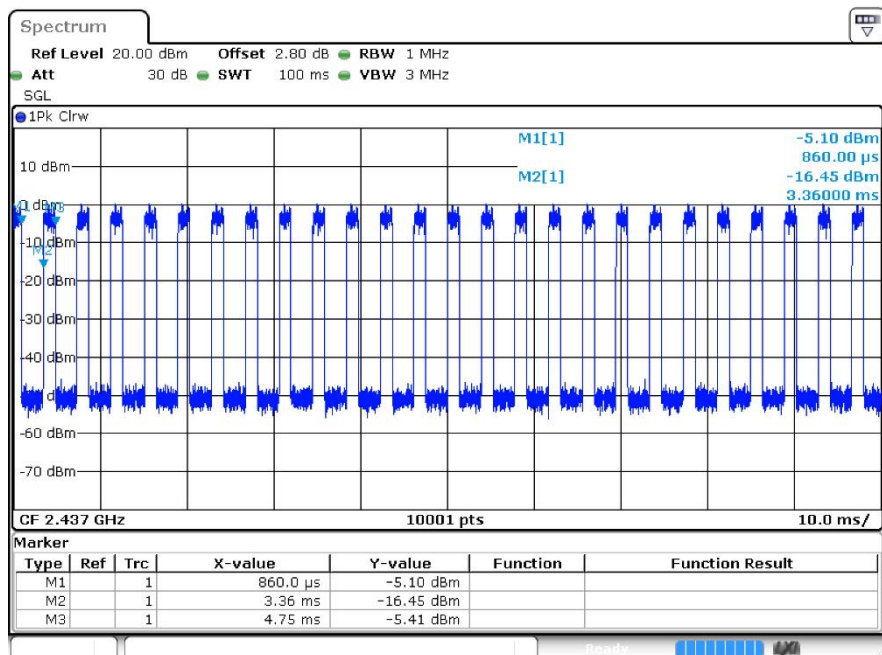


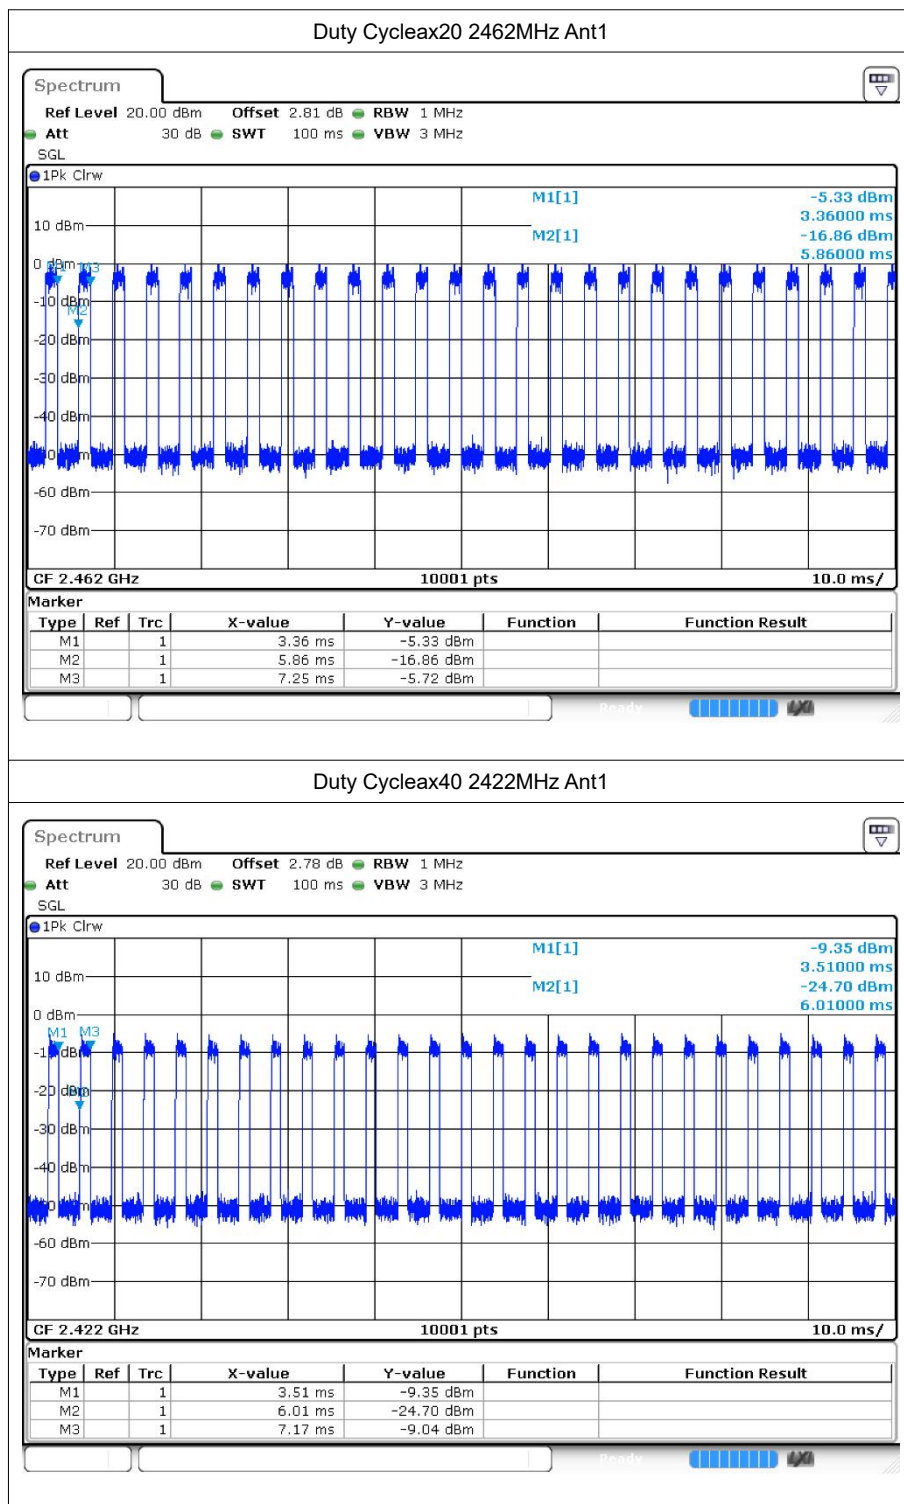

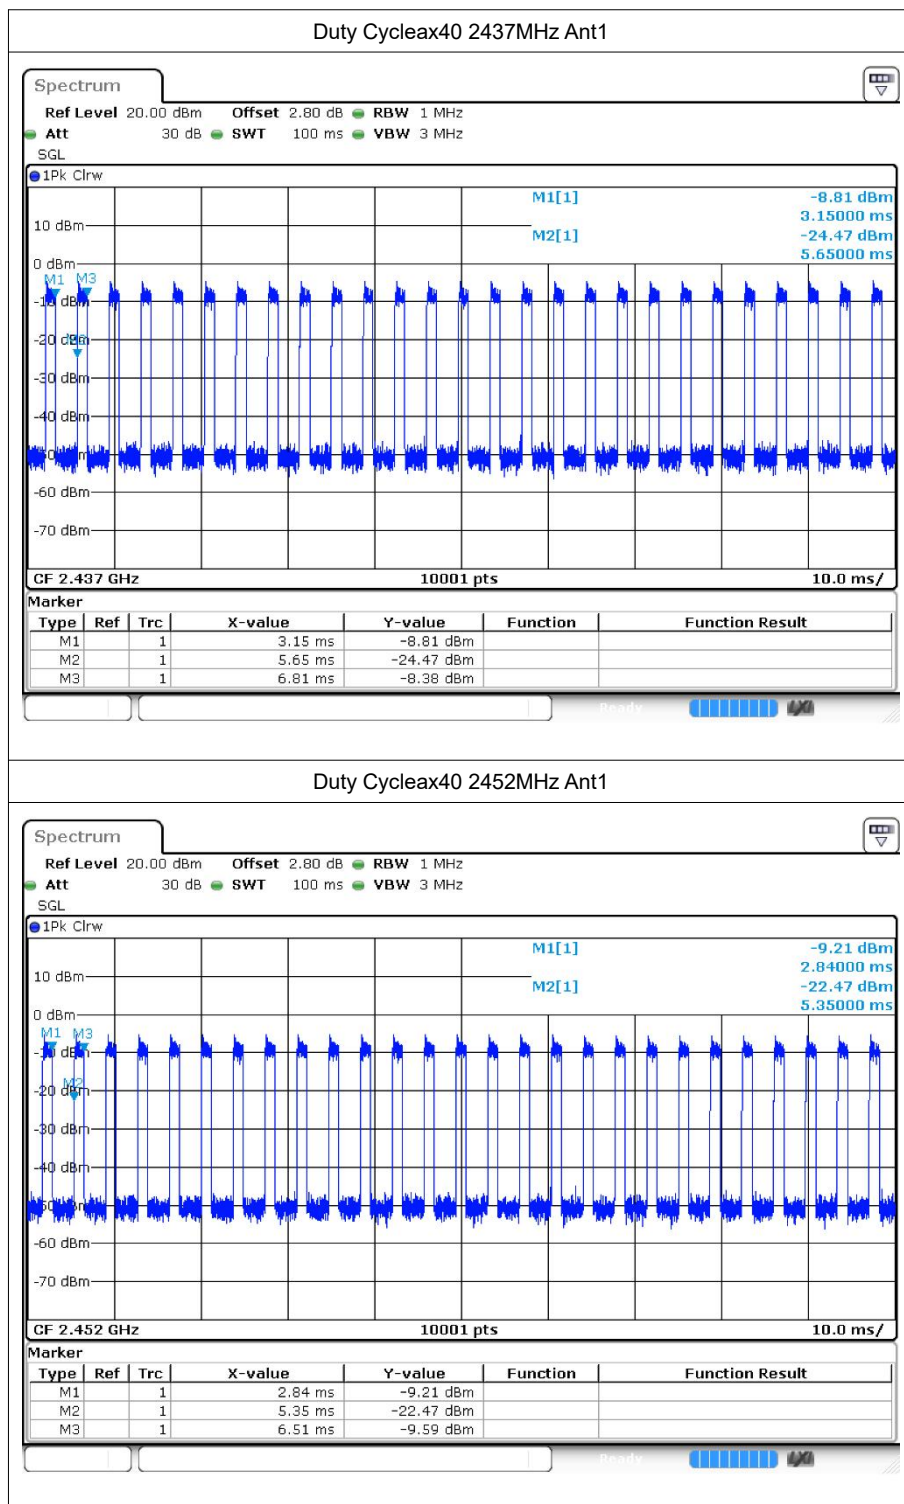

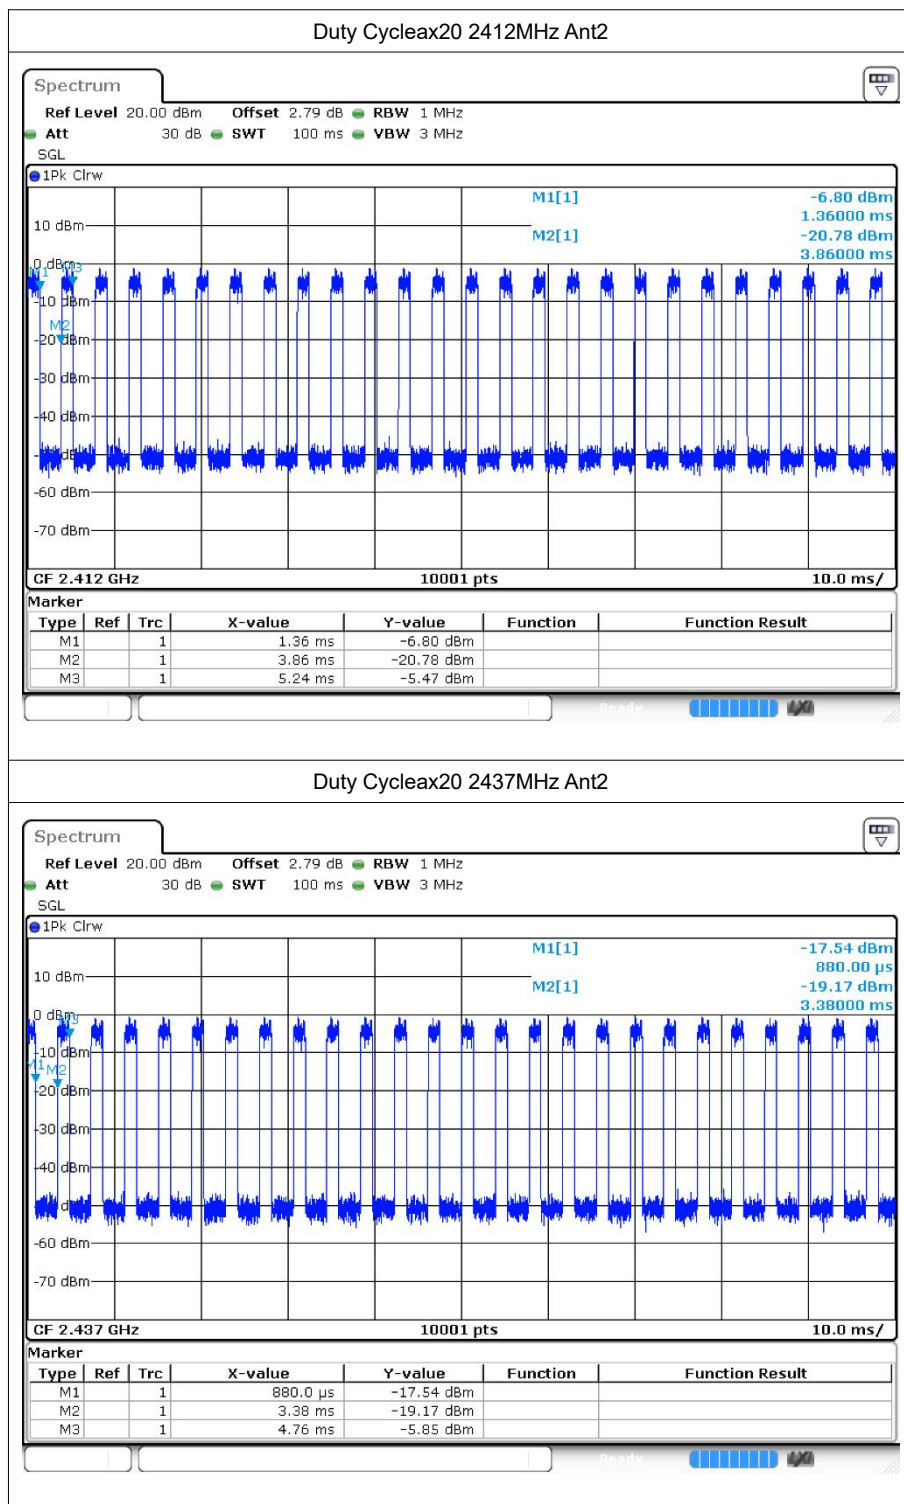

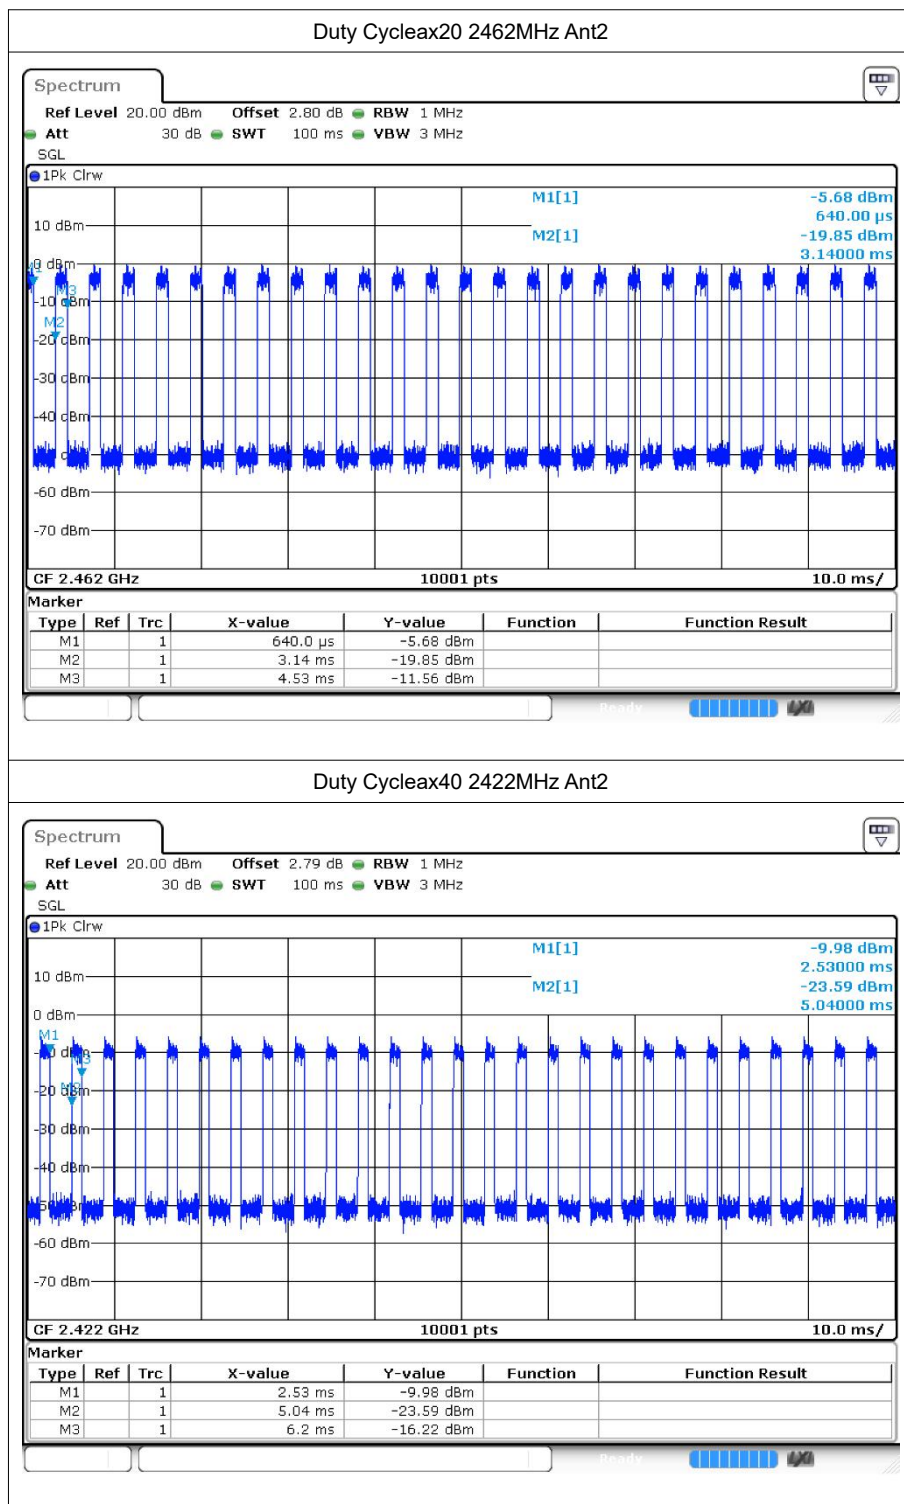

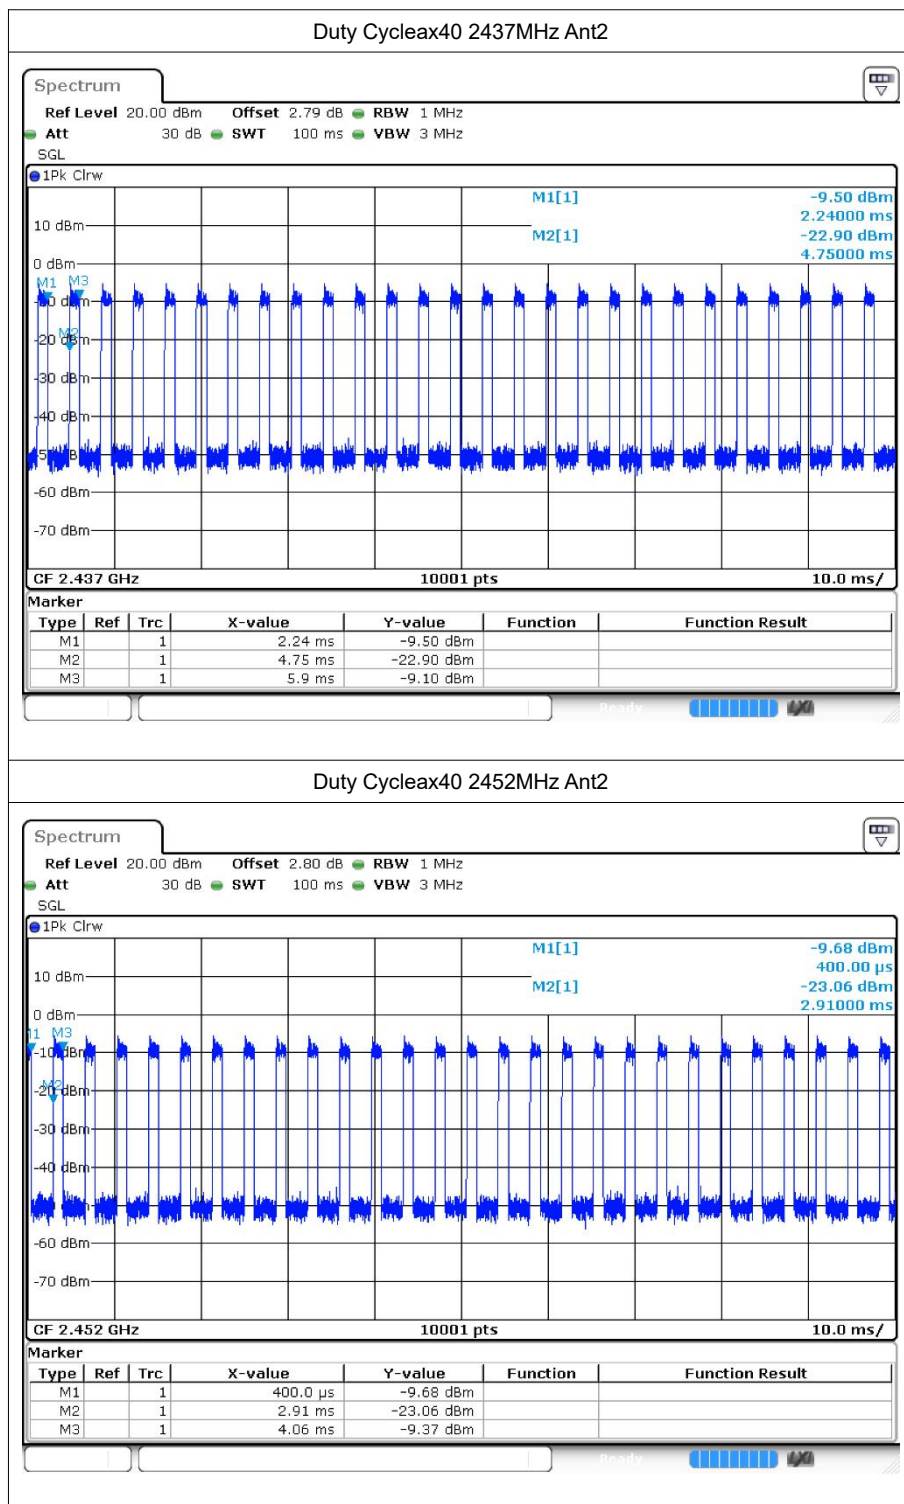

2 Maximum Conducted Output Power

2.1 Test Result

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
b	2412	Ant1	14.21	30	Pass
b	2437	Ant1	14.09	30	Pass
b	2462	Ant1	13.87	30	Pass
b	2412	Ant2	13.34	30	Pass
b	2437	Ant2	13.38	30	Pass
b	2462	Ant2	12.95	30	Pass
g	2412	Ant1	14.17	30	Pass
g	2437	Ant1	14.48	30	Pass
g	2462	Ant1	14.31	30	Pass
g	2412	Ant2	13.94	30	Pass
g	2437	Ant2	13.72	30	Pass
g	2462	Ant2	13.93	30	Pass
n20	2412	Ant1	10.76	30	Pass
n20	2437	Ant1	10.76	30	Pass
n20	2462	Ant1	10.99	30	Pass
n20	2412	Ant2	9.9	30	Pass
n20	2437	Ant2	10.13	30	Pass
n20	2462	Ant2	10.36	30	Pass
n20	2412	Sum	13.36	30	Pass
n20	2437	Sum	13.47	30	Pass
n20	2462	Sum	13.7	30	Pass
n40	2422	Ant1	10.43	30	Pass
n40	2437	Ant1	10.05	30	Pass
n40	2452	Ant1	10.02	30	Pass
n40	2422	Ant2	9.68	30	Pass
n40	2437	Ant2	9.52	30	Pass
n40	2452	Ant2	9.59	30	Pass
n40	2422	Sum	13.08	30	Pass
n40	2437	Sum	12.8	30	Pass
n40	2452	Sum	12.82	30	Pass
ax20	2412	Ant1	10.96	30	Pass
ax20	2437	Ant1	11.38	30	Pass



ax20	2462	Ant1	11.12	30	Pass
ax20	2412	Ant2	9.9	30	Pass
ax20	2437	Ant2	10.51	30	Pass
ax20	2462	Ant2	10.81	30	Pass
ax20	2412	Sum	13.7	30	Pass
ax20	2437	Sum	13.62	30	Pass
ax20	2462	Sum	13.89	30	Pass
ax40	2422	Ant1	9.95	30	Pass
ax40	2437	Ant1	9.87	30	Pass
ax40	2452	Ant1	9.87	30	Pass
ax40	2422	Ant2	9.44	30	Pass
ax40	2437	Ant2	9.16	30	Pass
ax40	2452	Ant2	9.51	30	Pass
ax40	2422	Sum	12.71	30	Pass
ax40	2437	Sum	12.54	30	Pass
ax40	2452	Sum	12.7	30	Pass




3 -6dB Bandwidth

3.1 Test Result


Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	Ant1	12.012	0.5	Pass
b	2437	Ant1	11.055	0.5	Pass
b	2462	Ant1	10.077	0.5	Pass
g	2412	Ant1	16.314	0.5	Pass
g	2437	Ant1	16.065	0.5	Pass
g	2462	Ant1	16.515	0.5	Pass
n20	2412	Ant1	17.586	0.5	Pass
n20	2437	Ant1	17.523	0.5	Pass
n20	2462	Ant1	17.562	0.5	Pass
n40	2422	Ant1	35.67	0.5	Pass
n40	2437	Ant1	36.366	0.5	Pass
n40	2452	Ant1	36.372	0.5	Pass
ax20	2412	Ant1	19.092	0.5	Pass
ax20	2437	Ant1	18.105	0.5	Pass
ax20	2462	Ant1	18.141	0.5	Pass
ax40	2422	Ant1	38.076	0.5	Pass
ax40	2437	Ant1	37.896	0.5	Pass
ax40	2452	Ant1	36.51	0.5	Pass
b	2412	Ant2	11.076	0.5	Pass
b	2437	Ant2	10.125	0.5	Pass
b	2462	Ant2	11.076	0.5	Pass
g	2412	Ant2	16.29	0.5	Pass
g	2437	Ant2	16.308	0.5	Pass
g	2462	Ant2	16.38	0.5	Pass
n20	2412	Ant2	17.169	0.5	Pass
n20	2437	Ant2	17.607	0.5	Pass
n20	2462	Ant2	17.616	0.5	Pass
n40	2422	Ant2	36.366	0.5	Pass
n40	2437	Ant2	36.36	0.5	Pass
n40	2452	Ant2	35.916	0.5	Pass
ax20	2412	Ant2	18.954	0.5	Pass
ax20	2437	Ant2	18.66	0.5	Pass
ax20	2462	Ant2	18.924	0.5	Pass
ax40	2422	Ant2	37.008	0.5	Pass
ax40	2437	Ant2	37.938	0.5	Pass
ax40	2452	Ant2	37.908	0.5	Pass

3.2 Test Graphs

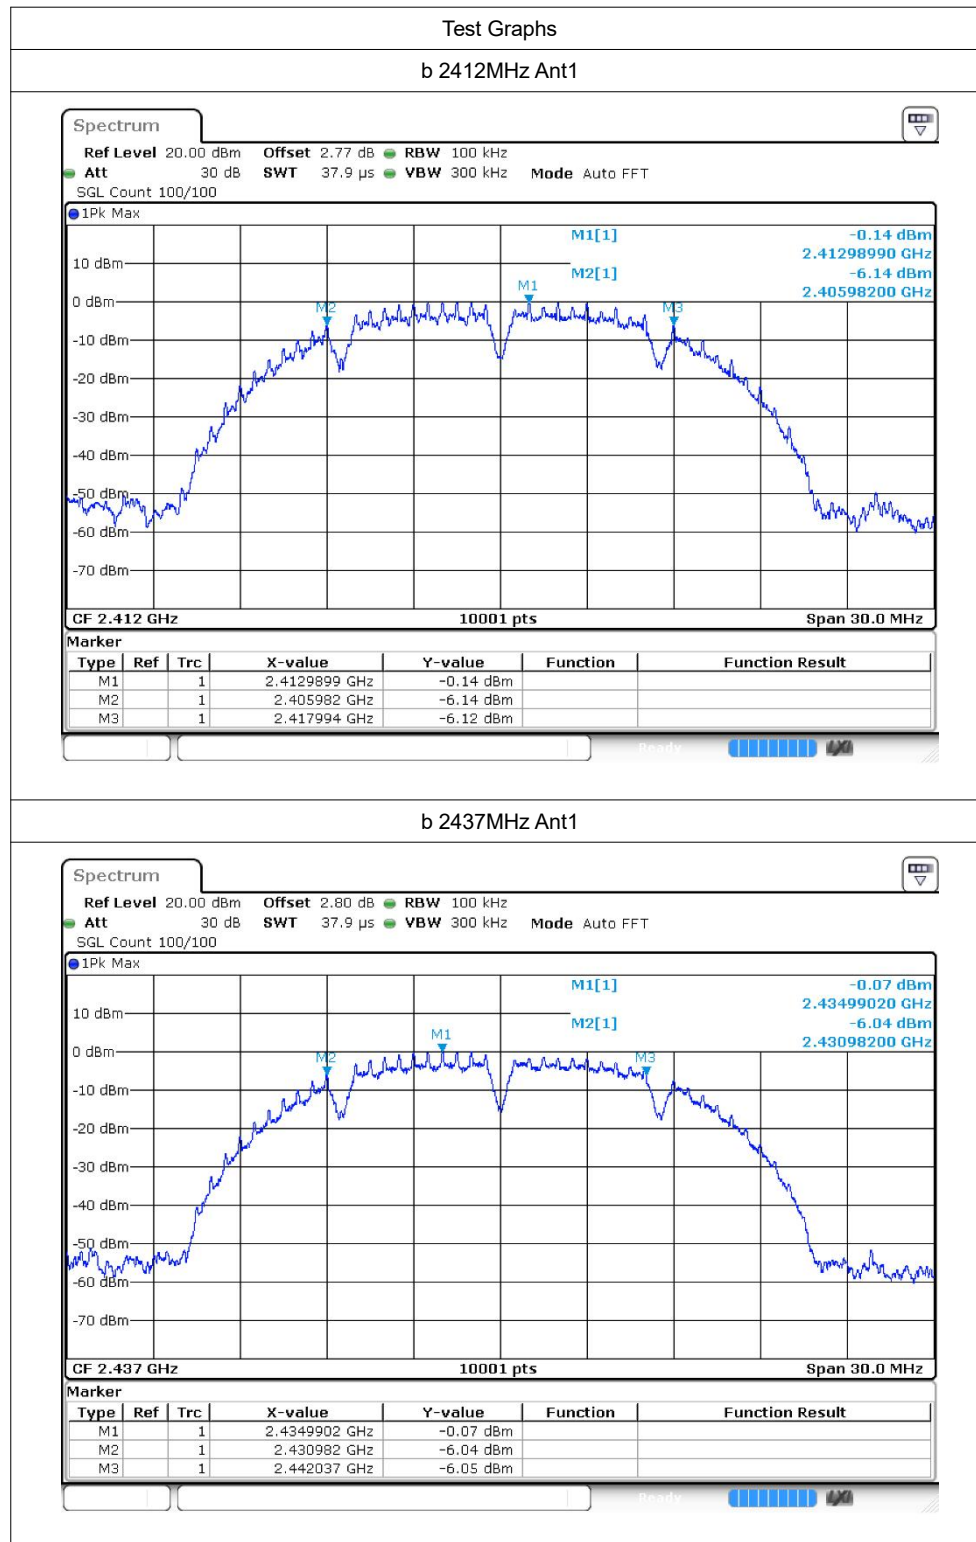



b 2462MHz Ant1

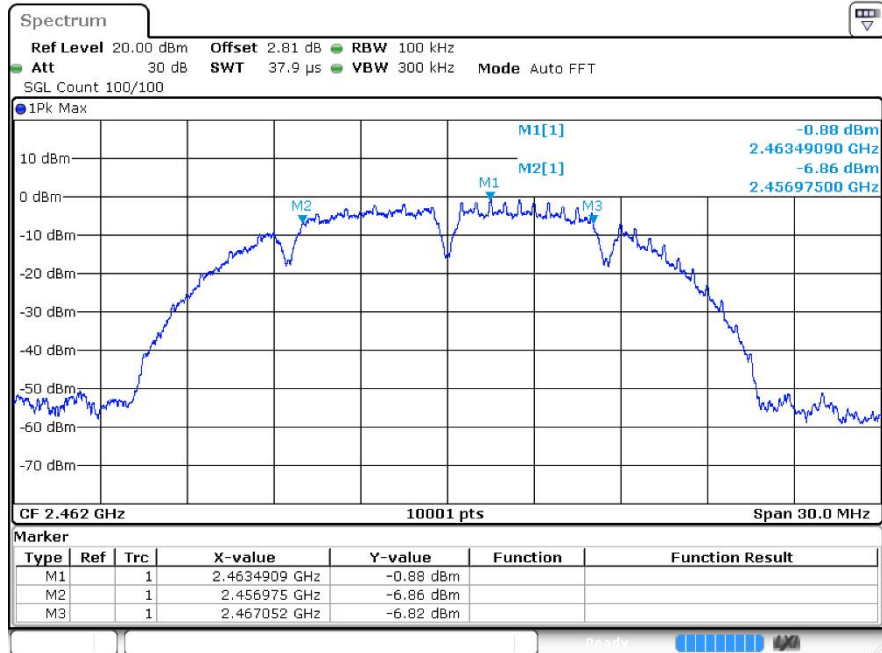

g 2412MHz Ant1

