

TEST REPORT

Test report no.: 1-7901/19-01-06-A

Testing laboratory

CTC advanced GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.ctcadvanced.com>

e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

Applicant

Parrot Faurecia Automotive SAS

40 av. des terroirs de France

75012 Paris / FRANCE

Phone: +33 1 48 03 60 60

Contact: Benjamin Renoncourt

e-mail: benjamin.renoncourt@faurecia.com

Phone: +33 1 44 52 41 04

Manufacturer

Parrot Faurecia Automotive SAS

40 av. des terroirs de France

75012 Paris / FRANCE

Test standard/s

FCC - Title 47 CFR
Part 15

FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 247 Issue 2

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices

RSS - Gen Issue 5

Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Head Unit with display

Model name: ICU

FCC ID: 2AT94ICU

IC: 25374-ICU

UNII bands:

Frequency: 5150 MHz to 5250 MHz; 5250 MHz to 5350 MHz;
5470 MHz to 5725 MHz; 5725 MHz to 5850 MHz

Technology tested: WLAN

Antenna: 2 integrated antennas

Power supply: 12.0 V DC by car battery

Temperature range: -40°C to +85°C



This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:



Andreas Luckenbill
Lab Manager
Radio Communications & EMC

Test performed:



Mihail Dorongovskij
Lab Manager
Radio Communications & EMC

1 Table of contents

| | | |
|---------|--|-----|
| 1 | Table of contents | 2 |
| 2 | General information | 3 |
| 2.1 | Notes and disclaimer | 3 |
| 2.2 | Application details | 3 |
| 2.3 | Test laboratories sub-contracted | 3 |
| 3 | Test standard/s, references and accreditations | 4 |
| 4 | Test environment | 5 |
| 5 | Test item | 5 |
| 5.1 | General description | 5 |
| 5.2 | Additional information | 5 |
| 6 | Sequence of testing | 6 |
| 6.1 | Sequence of testing radiated spurious 9 kHz to 30 MHz | 6 |
| 6.2 | Sequence of testing radiated spurious 30 MHz to 1 GHz | 7 |
| 6.3 | Sequence of testing radiated spurious 1 GHz to 18 GHz | 8 |
| 6.4 | Sequence of testing radiated spurious above 18 GHz | 9 |
| 7 | Description of the test setup | 10 |
| 7.1 | Shielded semi anechoic chamber | 11 |
| 7.2 | Shielded fully anechoic chamber | 12 |
| 7.3 | Radiated measurements > 18 GHz | 13 |
| 7.4 | Conducted measurements with peak power meter & spectrum analyzer | 14 |
| 7.5 | Shielded fully anechoic chamber | 15 |
| 8 | Measurement uncertainty | 16 |
| 9 | Summary of measurement results | 17 |
| 10 | Additional comments | 18 |
| 11 | Measurement results | 21 |
| 11.1 | Identify worst case data rate | 21 |
| 11.2 | Antenna gain | 22 |
| 11.3 | Power verification | 24 |
| 11.4 | Maximum output power | 27 |
| 11.4.1 | Maximum output power according to FCC requirements | 27 |
| 11.4.2 | Maximum output power according to IC requirements | 67 |
| 11.5 | Band edge compliance radiated | 112 |
| 11.6 | Spurious emissions radiated < 30 MHz | 120 |
| 11.7 | TX spurious emissions radiated | 134 |
| 11.8 | RX spurious emissions radiated | 210 |
| Annex A | Glossary | 214 |
| Annex B | Document history | 215 |
| Annex C | Accreditation Certificate – D-PL-12076-01-04 | 215 |
| Annex D | Accreditation Certificate – D-PL-12076-01-05 | 216 |

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-7901/19-01-06 and dated 2019-09-13.

2.2 Application details

| | |
|------------------------------------|------------|
| Date of receipt of order: | 2019-04-09 |
| Date of receipt of test item: | 2019-06-24 |
| Start of test: | 2019-06-25 |
| End of test: | 2019-08-22 |
| Person(s) present during the test: | -/- |

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

| Test standard | Date | Description |
|----------------------------|---------------|--|
| FCC - Title 47 CFR Part 15 | | FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices |
| RSS - 247 Issue 2 | February 2017 | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices |
| RSS - Gen Issue 5 | April 2018 | Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus |

| Guidance | Version | Description |
|----------------------|---------|---|
| UNII: KDB 789033 D02 | v02r01 | Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E |
| ANSI C63.4-2014 | -/- | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ANSI C63.10-2013 | -/- | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices |
| KDB 662911 D01 | v02r01 | Emissions Testing of Transmitters with Multiple Outputs in the Same Band |

| Accreditation | Description |
|------------------|---|
| D-PL-12076-01-04 | Telecommunication and EMC Canada https://www.dakks.de/as/ast/d/D-PL-12076-01-04.pdf |
| D-PL-12076-01-05 | Telecommunication FCC requirements https://www.dakks.de/as/ast/d/D-PL-12076-01-05.pdf |



4 Test environment

| | | | |
|---------------------------|---|-------------------------------------|--|
| Temperature | : | T_{nom} T_{max} T_{min} | +22 °C during room temperature tests No tests under extreme environmental conditions required. No tests under extreme environmental conditions required. |
| Relative humidity content | : | | 55 % |
| Barometric pressure | : | | 1021 hpa |
| Power supply | : | V_{nom} V_{max} V_{min} | 12.0 V AC by external power supply No tests under extreme environmental conditions required. No tests under extreme environmental conditions required. |

5 Test item

5.1 General description

| | | |
|----------------------------|---|--|
| Kind of test item | : | Head Unit with display |
| Type identification | : | ICU |
| HMN | : | -/- |
| PMN | : | ICU |
| HVIN | : | ICU |
| FVIN | : | -/- |
| S/N serial number | : | Rad. PF850310BA9C000017 Cond. PF850310BA9D000096 |
| Hardware status | : | HW03 |
| Software status | : | 22.00 |
| Frequency band | : | UNII bands: 5150 MHz to 5250 MHz; 5250 MHz to 5350 MHz; 5470 MHz to 5725 MHz; 5725 MHz to 5850 MHz |
| Type of radio transmission | : | OFDM |
| Use of frequency spectrum | : | |
| Type of modulation | : | (D)BPSK, (D)QPSK, 16 – QAM, 64 – QAM, 256 – QAM |
| Number of channels | : | 20 MHz: 24 40 MHz: 11 80 MHz: 5 |
| Antenna | : | 2 integrated antennas |
| Power supply | : | 12.0 V DC by car battery |
| Temperature range | : | -40°C to +85°C |

5.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

- 1-7901/19-01-01_AnnexA
- 1-7901/19-01-01_AnnexB
- 1-7901/19-01-01_AnnexD

6 Sequence of testing

6.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*)Note: The sequence will be repeated three times with different EUT orientations.

6.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

6.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

6.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

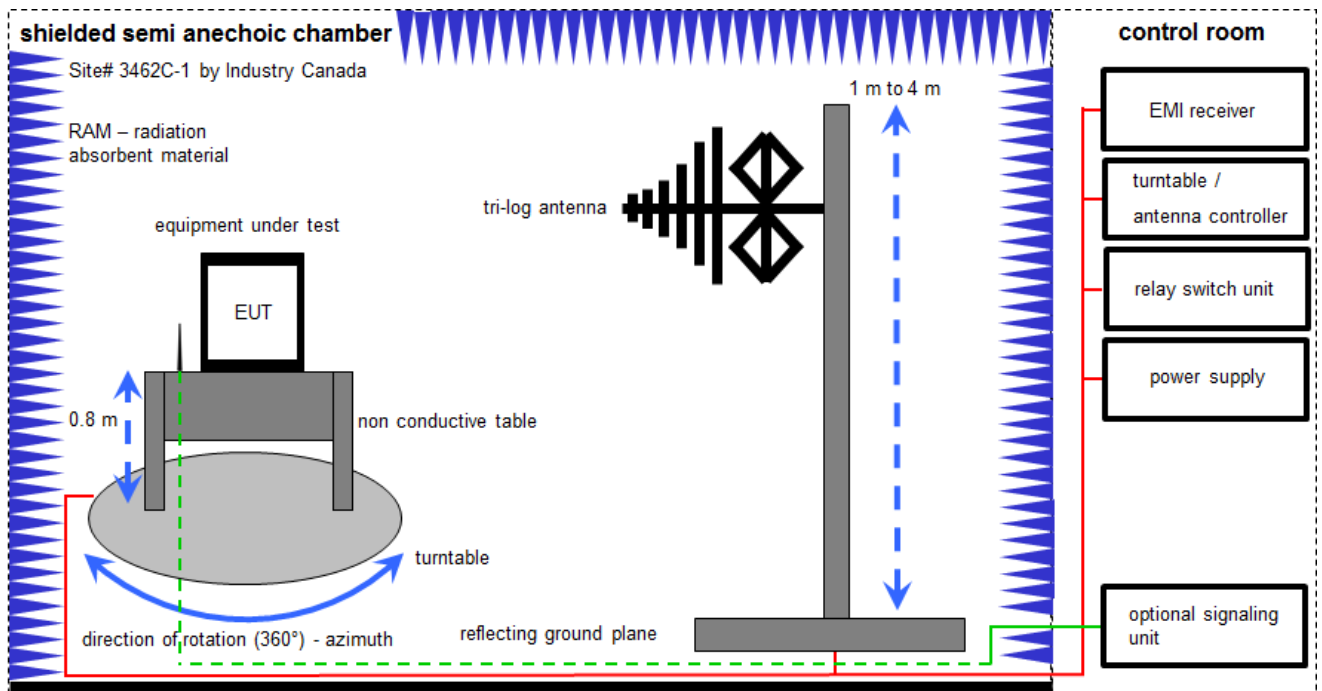
In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

| | | | |
|------|--|-----|--|
| k | calibration / calibrated | EK | limited calibration |
| ne | not required (k, ev, izw, zw not required) | zw | cyclical maintenance (external cyclical maintenance) |
| ev | periodic self verification | izw | internal cyclical maintenance |
| Ve | long-term stability recognized | g | blocked for accredited testing |
| vlk! | Attention: extended calibration interval | | |
| NK! | Attention: not calibrated | *) | next calibration ordered / currently in progress |

7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.



Measurement distance: tri-log antenna 10 meter
 EMC32 software version: 10.30.0

FS = UR + CL + AF
 (FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

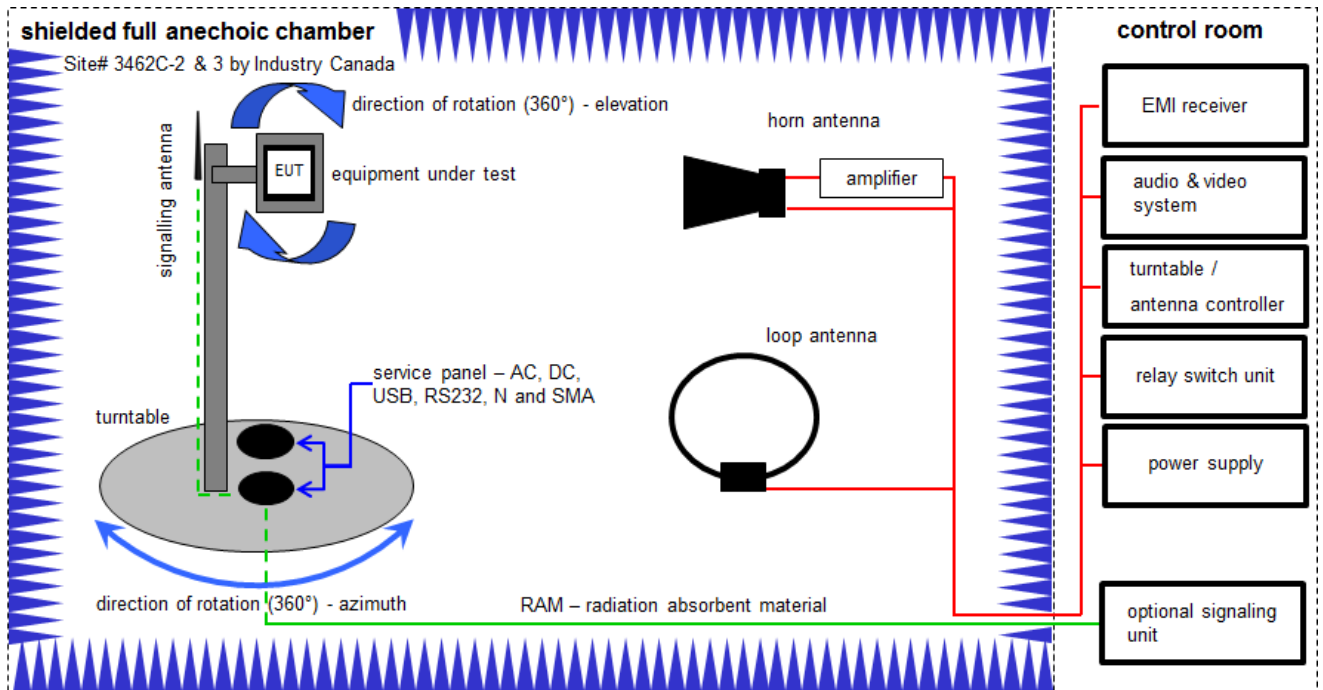
Example calculation:

FS [dBμV/m] = 12.35 [dBμV/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dBμV/m] (35.69 μV/m)

Equipment table:

| No. | Lab / Item | Equipment | Type | Manufacturer | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|--|------------------|-------------------------------|------------|-----------|---------------------|------------------|------------------|
| 1 | A | Switch-Unit | 3488A | HP | 2719A14505 | 300000368 | ev | -/- | -/- |
| 2 | A | Meßkabine 1 | HF-Absorberhalle | MWB AG 300023 | -/- | 300000551 | ne | -/- | -/- |
| 3 | A | EMI Test Receiver | ESCI 3 | R&S | 100083 | 300003312 | k | 12.12.2018 | 11.12.2019 |
| 4 | A | Antenna Tower | Model 2175 | ETS-Lindgren | 64762 | 300003745 | izw | -/- | -/- |
| 5 | A | Positioning Controller | Model 2090 | ETS-Lindgren | 64672 | 300003746 | izw | -/- | -/- |
| 6 | A | Turntable Interface-Box | Model 105637 | ETS-Lindgren | 44583 | 300003747 | izw | -/- | -/- |
| 7 | A | TRILOG Broadband Test-Antenna 30 MHz - 3 GHz | VULB9163 | Schwarzbeck Mess - Elektronik | 371 | 300003854 | vKI! | 24.11.2017 | 23.11.2020 |
| 8 | A | Power Supply DC | N5767A | Agilent Technologies | US14J1569P | 300004851 | vKI! | 13.12.2018 | 12.12.2020 |

7.2 Shielded fully anechoic chamber



Measurement distance: horn antenna 3 meter; loop antenna 3 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:

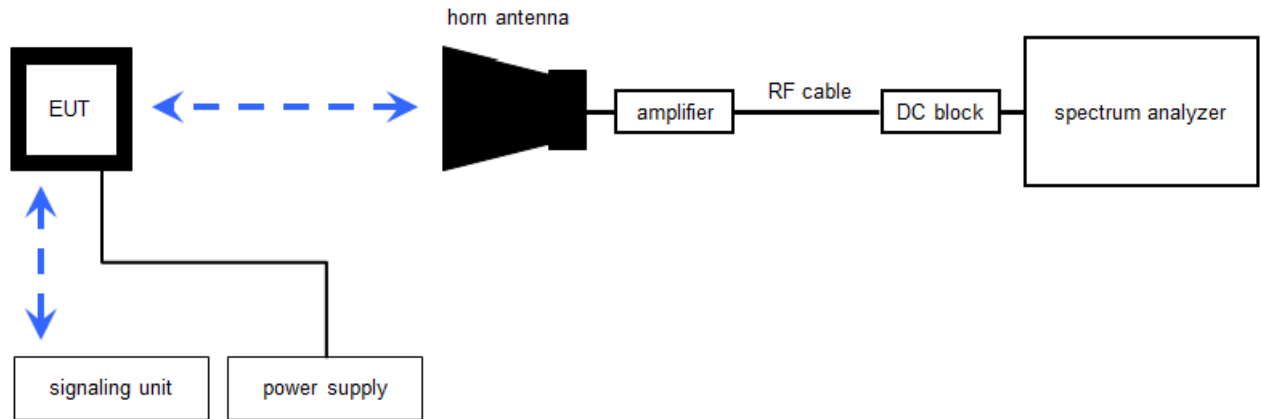
$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$

Equipment table:

| No. | Lab / Item | Equipment | Type | Manufacturer | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|--|-------------------------|----------------------|------------|-----------|---------------------|------------------|------------------|
| 1 | A, B | Anechoic chamber | FAC 3/5m | MWB / TDK | 87400/02 | 300000996 | ev | -/- | -/- |
| 2 | A, B | Switch / Control Unit | 3488A | HP | * | 300000199 | ne | -/- | -/- |
| 3 | A | Double-Ridged Waveguide Horn Antenna 1-18.0GHz | 3115 | EMCO | 8812-3089 | 300000307 | vIKI! | 07.07.2017 | 06.07.2019 |
| 4 | A, B | EMI Test Receiver 20Hz- 26.5GHz | ESU26 | R&S | 100037 | 300003555 | k | 14.09.2018 | 13.12.2019 |
| 5 | A | Highpass Filter | WHK1.1/15G-10SS | Wainwright | 3 | 300003255 | ev | -/- | -/- |
| 6 | A | Highpass Filter | WHKX7.0/18G-8SS | Wainwright | 19 | 300003790 | ne | -/- | -/- |
| 7 | A | High Pass Filter | VHF-3500+ | Mini Circuits | -/- | 400000193 | ne | -/- | -/- |
| 8 | A | Broadband Amplifier 0.5-18 GHz | CBLU5184540 | CERNEX | 22049 | 300004481 | ev | -/- | -/- |
| 9 | A, B | 4U RF Switch Platform | L4491A | Agilent Technologies | MY50000037 | 300004509 | ne | -/- | -/- |
| 10 | A, B | NEXIO EMV-Software | BAT EMC V3.16.0.49 | EMCO | -/- | 300004682 | ne | -/- | -/- |
| 11 | A, B | PC | ExOne | F+W | -/- | 300004703 | ne | -/- | -/- |
| 12 | A | RF-Amplifier | AMF-6F06001800-30-10P-R | NARDA-MITEQ Inc | 2011572 | 300005241 | ev | -/- | -/- |
| 13 | B | Active Loop Antenna 9 kHz to 30 MHz | 6502 | EMCO | 2210 | 300001015 | vIKI! | 07.07.2017 | 06.07.2019 |
| 14 | A, B | DC power supply, 60Vdc, 50A, 1200 W | 6032A | HP | 2818A03450 | 300001040 | vIKI! | 12.12.2017 | 11.12.2020 |

7.3 Radiated measurements > 18 GHz

Radiated measurements > 18 GHz



Measurement distance: horn antenna 50 cm

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:

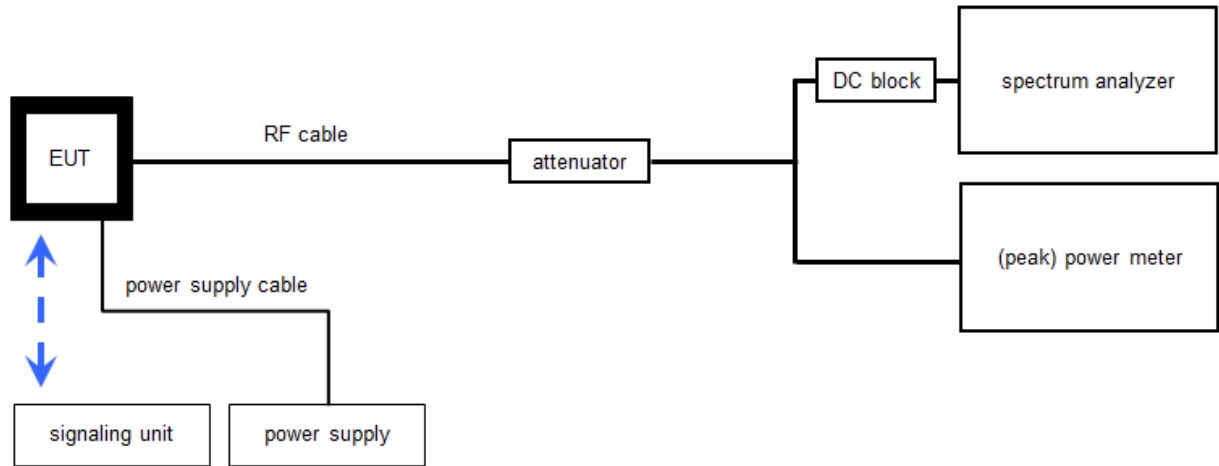
FS [dBμV/m] = 40.0 [dBμV/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dBμV/m] (6.79 μV/m)

Equipment table:

| No. | Lab / Item | Equipment | Type | Manufacturer | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|--|---------------------|-----------------|------------------|-----------|---------------------|------------------|------------------|
| 1 | A | Microwave System Amplifier, 0.5-26.5 GHz | 83017A | HP | 00419 | 300002268 | ev | -/- | -/- |
| 2 | A | Std. Gain Horn Antenna 18.0-26.5 GHz | 638 | Narda | 01096 | 300000486 | vIKI! | 13.12.2017 | 12.12.2019 |
| 3 | A | Std. Gain Horn Antenna 26.5-40.0 GHz | V637 | Narda | 82-16 | 300000510 | vIKI! | 13.12.2017 | 12.12.2019 |
| 4 | A | Amplifier 2-40 GHz | JS32-02004000-57-5P | MITEQ | 1777200 | 300004541 | ev | -/- | -/- |
| 5 | A | Signal Analyzer 40 GHz | FSV40 | R&S | 101042 | 300004517 | k | 17.12.2018 | 16.12.2019 |
| 6 | A | RF-Cable | ST18/SMAm/SMAm/48 | Huber & Suhner | Batch no. 600918 | 400001182 | ev | -/- | -/- |
| 7 | A | RF-Cable | ST18/SMAm/SMAm/48 | Huber & Suhner | Batch no. 127377 | 400001183 | ev | -/- | -/- |
| 8 | A | DC-Blocker 0.1-40 GHz | 8141A | Inmet | -/- | 400001185 | ev | -/- | -/- |
| 9 | A | DC Power Supply | HMP2020 | Rohde & Schwarz | 102850 | 300005517 | vIKI! | 14.12.2017 | 13.12.2019 |

7.4 Conducted measurements with peak power meter & spectrum analyzer

Conducted measurements normal conditions



WLAN tester version: 1.1.13; LabView2015

OP = AV + CA
 (OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

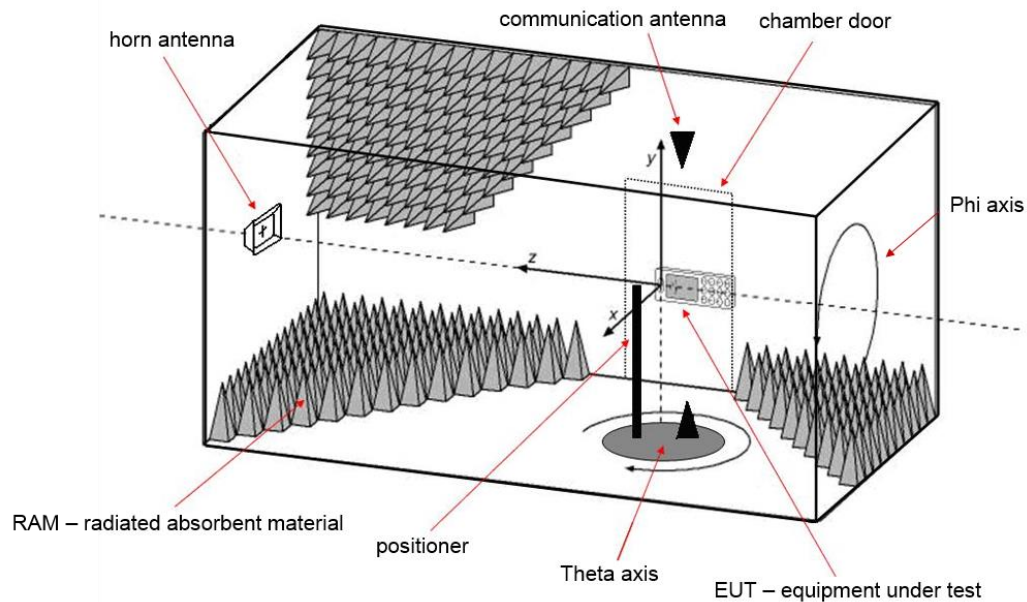
OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

| No. | Lab / Item | Equipment | Type | Manufacturer | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|-----------------------------------|---------------------------------------|---------------------------|------------------|-----------|---------------------|------------------|------------------|
| 1 | A | DC-Blocker 0.1-40 GHz | 8141A | Inmet | -/- | 400001185 | ev | -/- | -/- |
| 2 | A | Hygro-Thermometer | -/-, 5-45°C, 20-100%rF | Thies Clima | -/- | 400000108 | ev | 11.05.2018 | 10.05.2020 |
| 3 | A | Signal Analyzer 40 GHz | FSV40 | R&S | 101042 | 300004517 | k | 17.12.2018 | 16.12.2019 |
| 4 | A | PC Tester R005 | Intel Core i3 3220/3,3 GHz, Prozessor | -/- | 2V2403033A4523 | 300004589 | ne | -/- | -/- |
| 5 | A | Teststand | Teststand Custom Sequence Editor | National Instruments GmbH | -/- | 300004590 | ne | -/- | -/- |
| 6 | A | RF-Cable | ST18/SMAM/SMAM/60 | Huber & Suhner | Batch no. 606844 | 400001181 | ev | -/- | -/- |
| 7 | A | Coax Attenuator 10 dB 2W 0-40 GHz | MCL BW-K10-2W44+ | Mini Circuits | -/- | 400001186 | ev | -/- | -/- |
| 8 | A | Synchron Power Meter | SPM-4 | CTC | 1 | 300005580 | ev | -/- | -/- |
| 9 | A | DC-Blocker | WA7046 | Weinschel Associates | -/- | 400001310 | ev | -/- | -/- |
| 10 | A | DC Power Supply | HMP2020 | Rohde & Schwarz | 102850 | 300005517 | vKI! | 14.12.2017 | 13.12.2019 |

7.5 Shielded fully anechoic chamber

OTA – over the air performance



Equipment table:

| No. | Lab / Item | Equipment | Type | Manufacturer | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|--------------------------------------|--------------------------------------|----------------------|------------|-----------|---------------------|------------------|------------------|
| 1 | A | CTIA-Chamber | CTIA-Chamber AMS 8500 | ETS-Lindgren Finland | -/- | 300003327 | ne | -/- | -/- |
| 2 | A | CTIA-Chamber - Positioning Equipment | CTIA-Chamber - Positioning Equipment | EMCO/2 | -/- | 300003328 | ne | -/- | -/- |
| 3 | A | CTIA-Chamber - Software | CTIA-Chamber - Software | EMCO/2 | -/- | 300003328 | ne | -/- | -/- |
| 4 | A | CTIA-Chamber - Antenna | 3164-04 | EMCO/2 | 00041915 | 300003328 | ne | -/- | -/- |
| 5 | A | Spectrum Analyzer 9kHz - 30 GHz | FSP30 | R&S | 100623 | 300003464 | vKI! | 13.12.2018 | 12.12.2020 |
| 6 | A | Power Supply DC | NGSM 32/10 | Rohde & Schwarz | 3939 | 400000192 | vKI! | 31.01.2017 | 30.01.2020 |

8 Measurement uncertainty

| Measurement uncertainty | | |
|--|--|---------------|
| Test case | Uncertainty | |
| Antenna gain | ± 3 dB | |
| Power spectral density | ± 1.15 dB | |
| Spectrum bandwidth | ± 100 kHz (depends on the used RBW) | |
| Occupied bandwidth | ± 100 kHz (depends on the used RBW) | |
| Maximum output power | ± 1.15 dB conducted ± 3 dB radiated | |
| Minimum emissions bandwidth | ± 100 kHz (depends on the used RBW) | |
| Band edge compliance radiated | ± 3 dB | |
| Spurious emissions conducted | > 3.6 GHz | ± 1.15 dB |
| | > 7 GHz | ± 1.15 dB |
| | > 18 GHz | ± 1.89 dB |
| | ≥ 40 GHz | ± 3.12 dB |
| Spurious emissions radiated below 30 MHz | ± 3 dB | |
| Spurious emissions radiated 30 MHz to 1 GHz | ± 3 dB | |
| Spurious emissions radiated 1 GHz to 12.75 GHz | ± 3.7 dB | |
| Spurious emissions radiated above 12.75 GHz | ± 4.5 dB | |
| Spurious emissions conducted below 30 MHz (AC conducted) | ± 2.6 dB | |

9 Summary of measurement results

| | |
|-------------------------------------|--|
| <input checked="" type="checkbox"/> | No deviations from the technical specifications were ascertained |
| <input type="checkbox"/> | There were deviations from the technical specifications ascertained |
| <input checked="" type="checkbox"/> | This test report is only a partial test report. The content and verdict of the performed test cases are listed below. |

| TC Identifier | Description | Verdict | Date | Remark |
|---------------|---------------------------------|-----------|------------|--------|
| RF-Testing | CFR Part 15 RSS 247, Issue 2 | See table | 2019-10-15 | -/- |

| Test specification clause | Test case | Temperature conditions | Power source voltages | C | NC | NA | NP | Remark |
|--|---|------------------------|-----------------------|-------------------------------------|--------------------------|-------------------------------------|-------------------------------------|--------|
| -/- | Output power verification (cond.) | Nominal | Nominal | -/- | | | | -/- |
| -/- | Antenna gain | Nominal | Nominal | -/- | | | | -/- |
| U-NII Part 15 | Duty cycle | Nominal | Nominal | -/- | | | | -/- |
| §15.407(a) RSS - 247 (6.2.1.1) RSS - 247 (6.2.2.1) RSS - 247 (6.2.3.1) RSS - 247 (6.2.4.1) | Maximum output power (conducted & radiated) | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| §15.407(a) RSS - 247 (6.2.1.1) RSS - 247 (6.2.2.1) RSS - 247 (6.2.3.1) RSS - 247 (6.2.4.1) | Power spectral density | Nominal | Nominal | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/- |
| RSS - 247 (6.2.4.1) | Spectrum bandwidth 6dB bandwidth | Nominal | Nominal | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/- |
| §15.407(a) RSS - 247 (6.2.1.2) | Spectrum bandwidth 26dB bandwidth | Nominal | Nominal | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/- |
| RSS Gen clause 6.6 | Spectrum bandwidth 99% bandwidth | Nominal | Nominal | -/- | | | | -/- |
| §15.205 RSS - 247 (6.2.1.2) RSS - 247 (6.2.2.2) RSS - 247 (6.2.3.2) RSS - 247 (6.2.4.2) | Band edge compliance radiated | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| §15.407(b) RSS - 247 (6.2.1.2) RSS - 247 (6.2.2.2) RSS - 247 (6.2.3.2) RSS - 247 (6.2.4.2) | TX spurious emissions radiated | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| §15.109 RSS-Gen | RX spurious emissions radiated | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| §15.209(a) RSS-Gen | Spurious emissions radiated < 30 MHz | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| §15.107(a) §15.207 | Spurious emissions conducted emissions < 30 MHz | Nominal | Nominal | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | -/- |
| §15.407 RSS - 247 (6.3) | DFS | Nominal | Nominal | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/- |

Notes:

| | | | | | | | |
|-----------|-----------|------------|---------------|------------|----------------|------------|---------------|
| C: | Compliant | NC: | Not compliant | NA: | Not applicable | NP: | Not performed |
|-----------|-----------|------------|---------------|------------|----------------|------------|---------------|

10 Additional comments

Reference documents: Basic_Questions_to_Equipment_Under_Test__EUT__v2.pdf
 Module test report: MDE_UBLOX_1828_FCCg.pdf

Special test descriptions: None

Configuration descriptions: Antenna 1 supports a-mode (SISO), n/ac HT20 (SISO and MIMO), n/ac HT20 (SISO and MIMO) and ac80-mode (SISO and MIMO)
 Antenna 2 supports n/ac HT20 (MIMO), n/ac HT20 (MIMO) and ac80-mode (MIMO)
 All radiated tests were performed with TX mode enabled on both antennas. For channels and power settings please see the tables below:

Channels with 20 MHz channel bandwidth:

| U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency | | | | | | | | |
|---|------|------|------|------|------|------|------|------|
| channel | 36 | 40 | 44 | 48 | 52 | 56 | 60 | 64 |
| f _c / MHz | 5180 | 5200 | 5220 | 5240 | 5260 | 5280 | 5300 | 5320 |
| Power setting | 12 | 14 | 14 | 14 | 14 | 14 | 14 | 12 |

| U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency | | | | | | | | | | | |
|--|------|------|------|------|------|------|------|------|------|------|------|
| channel | 100 | 104 | 108 | 112 | 116 | 120 | 124 | 128 | 132 | 136 | 140 |
| f _c / MHz | 5500 | 5520 | 5540 | 5560 | 5580 | 5600 | 5620 | 5640 | 5660 | 5680 | 5700 |
| Power setting | 11 | 14 | 14 | 14 | 14 | 14 | 14 | 14 | 14 | 14 | 11 |

| U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency | | | | | |
|---|------|------|------|------|------|
| channel | 149 | 153 | 157 | 161 | 165 |
| f _c / MHz | 5745 | 5765 | 5785 | 5805 | 5825 |
| Power setting | 17 | 17 | 17 | 17 | 17 |

Channels with 40 MHz channel bandwidth:

| U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency | | | | |
|---|-------------|-------------|-------------|-------------|
| channel | 38 | 46 | 54 | 62 |
| f _c / MHz | 5190 | 5230 | 5270 | 5310 |
| Power setting | 10 | 13 | 13 | 12 |

| U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency | | | | | |
|--|-------------|-------------|-------------|-------------|-------------|
| channel | 102 | 110 | 118 | 126 | 134 |
| f _c / MHz | 5510 | 5550 | 5590 | 5630 | 5670 |
| Power setting | 10 | 14 | 14 | 14 | 11 |

| U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency | | |
|---|-------------|-------------|
| channel | 151 | 159 |
| f _c / MHz | 5755 | 5795 |
| | 17 | 17 |

Channels with 80 MHz channel bandwidth:

| U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency | | |
|---|-------------|-------------|
| channel | 42 | 58 |
| f _c / MHz | 5210 | 5290 |
| Power setting | 10 | 10 |

| U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency | | |
|--|-------------|-------------|
| channel | 106 | 122 |
| f _c / MHz | 5530 | 5610 |
| Power setting | 9 | 9 |

| U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency | |
|---|-------------|
| channel | 155 |
| f _c / MHz | 5775 |
| Power setting | 15 |

Note: The channels used for the tests were marked in bold in the list.

Test mode:

- ☐ No test mode available.
Iperf was used to ping another device with the largest support packet size
- ☒ Special software is used.
EUT is transmitting pseudo random data by itself

Antennas and transmit
operating modes:

- ☐ Operating mode 1 (single antenna)
- Equipment with 1 antenna,
 - Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,
 - Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)
- ☒ Operating mode 2 (multiple antennas, no beamforming)
- Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.
- ☐ Operating mode 3 (multiple antennas, with beamforming)
- Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

11 Measurement results

11.1 Identify worst case data rate

Measurement:

All modes of the module will be measured with an average power meter to identify the maximum transmission power on mid channel. In the case that only one or two channels are available, only these will be measured.

In further tests only the identified worst case modulation scheme or bandwidth will be measured.

Measurement parameters:

| Measurement parameter | |
|--------------------------|---------------------|
| Detector: | Peak |
| Sweep time: | Auto |
| Resolution bandwidth: | 3 MHz |
| Video bandwidth: | 3 MHz |
| Trace mode: | Max hold |
| Used test setup: | See chapter 6.4 – A |
| Measurement uncertainty: | See chapter 8 |

Results:

| OFDM – mode | Modulation scheme / bandwidth | | | | | |
|------------------|-------------------------------|--------------|-------------|--------------|-------------|--------------|
| | U-NII-1 & U-NII-2A | | U-NII-2C | | U-NII-3 | |
| | Low channel | high channel | Low channel | high channel | Low channel | high channel |
| a – mode | 6 Mbit/s | 6 Mbit/s | 6 Mbit/s | 6 Mbit/s | 6 Mbit/s | 6 Mbit/s |
| n/ac HT20 – mode | MCS0 | MCS0 | MCS0 | MCS0 | MCS0 | MCS0 |
| n/ac HT40 – mode | MCS0 | MCS0 | MCS0 | MCS0 | MCS0 | MCS0 |
| ac80– mode | MCS0 | MCS0 | MCS0 | MCS0 | MCS0 | MCS0 |

11.2 Antenna gain

Description:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Measurement parameters:

| Measurement parameter | |
|--------------------------|---|
| Detector: | Peak |
| Sweep time: | Auto |
| Resolution bandwidth: | 3 MHz |
| Video bandwidth: | 3 MHz |
| Trace mode: | Max. hold |
| Test setup: | See chapter 6.5 – A (radiated) See chapter 6.4 – A (conducted) |
| Measurement uncertainty: | See chapter 8 |

Limits:

| Antenna Gain |
|---|
| 6 dBi / > 6 dBi output power and power density reduction required |

Results: Antenna 1

| U-NII-1 (5150 MHz to 5250 MHz) | Antenna gain | | |
|-----------------------------------|----------------|----------------|-----------------|
| | Lowest channel | Middle channel | Highest channel |
| Conducted power / dBm @ 3 MHz RBW | 16.6 | -/- | 15.8 |
| Radiated power / dBm @ 3 MHz RBW | 15.7 | -/- | 15.0 |
| Gain / dBi (calculated) | -0.9 | -/- | -0.8 |

| U-NII-2A (5250 MHz to 5350 MHz) | Antenna gain | | |
|------------------------------------|----------------|----------------|-----------------|
| | Lowest channel | Middle channel | Highest channel |
| Conducted power / dBm @ 3 MHz RBW | 16.9 | -/- | 17.3 |
| Radiated power / dBm @ 3 MHz RBW | 14.6 | -/- | 13.2 |
| Gain / dBi (calculated) | -2.3 | -/- | -4.1 |

| U-NII-2C (5470 MHz to 5725 MHz) | Antenna gain | | |
|------------------------------------|----------------|----------------|-----------------|
| | Lowest channel | Middle channel | Highest channel |
| Conducted power / dBm @ 3 MHz RBW | 18.8 | 18.6 | 18.3 |
| Radiated power / dBm @ 3 MHz RBW | 16.3 | 15.7 | 12.7 |
| Gain / dBi (calculated) | -2.5 | -2.9 | -5.6 |

| U-NII-3 (5725 MHz to 5850 MHz) | Antenna gain | | |
|-----------------------------------|----------------|----------------|-----------------|
| | Lowest channel | Middle channel | Highest channel |
| Conducted power / dBm @ 3 MHz RBW | 18.5 | 17.1 | 18.1 |
| Radiated power / dBm @ 3 MHz RBW | 12.7 | 13.9 | 14.8 |
| Gain / dBi (calculated) | -5.8 | -3.2 | -4.3 |

Results: Antenna 2

| U-NII-1 (5150 MHz to 5250 MHz) | Antenna gain | | |
|-----------------------------------|----------------|----------------|-----------------|
| | Lowest channel | Middle channel | Highest channel |
| Conducted power / dBm @ 3 MHz RBW | 19.1 | -/- | 17.7 |
| Radiated power / dBm @ 3 MHz RBW | 16.9 | -/- | 15.7 |
| Gain / dBi (calculated) | -2.2 | -/- | -2.0 |

| U-NII-2A (5250 MHz to 5350 MHz) | Antenna gain | | |
|------------------------------------|----------------|----------------|-----------------|
| | Lowest channel | Middle channel | Highest channel |
| Conducted power / dBm @ 3 MHz RBW | 18.3 | -/- | 18.4 |
| Radiated power / dBm @ 3 MHz RBW | 15.5 | -/- | 14.6 |
| Gain / dBi (calculated) | -2.8 | -/- | -3.8 |

| U-NII-2C (5470 MHz to 5725 MHz) | Antenna gain | | |
|------------------------------------|----------------|----------------|-----------------|
| | Lowest channel | Middle channel | Highest channel |
| Conducted power / dBm @ 3 MHz RBW | 18.7 | 17.6 | 16.5 |
| Radiated power / dBm @ 3 MHz RBW | 14.8 | 18.2 | 16.2 |
| Gain / dBi (calculated) | -3.9 | -0.6 | -0.3 |

| U-NII-3 (5725 MHz to 5850 MHz) | Antenna gain | | |
|-----------------------------------|----------------|----------------|-----------------|
| | Lowest channel | Middle channel | Highest channel |
| Conducted power / dBm @ 3 MHz RBW | 17.5 | 15.2 | 15.7 |
| Radiated power / dBm @ 3 MHz RBW | 16.4 | 14.7 | 15.8 |
| Gain / dBi (calculated) | -1.1 | -0.5 | 0.1 |

11.3 Power verification

Description:

The measured power values from Chapter 11.4 are compared with the power values from the module test report MDE_UBLOX_1828_FCCg.pdf.

Measurement:

| Measurement parameter | |
|-------------------------------------|--|
| According to: KDB789033 D02, E.2.e. | |
| Detector: | RMS |
| Sweep time: | $\geq 10 \cdot (\text{swp points}) \cdot (\text{total on/off time})$ |
| Resolution bandwidth: | 1 MHz |
| Video bandwidth: | 3 MHz |
| Span: | > EBW |
| Trace mode: | Max hold |
| Analyzer function | Band power / channel power Interval > 26 dB EBW |
| Used test setup: | See chapter 6.4 – A |
| Measurement uncertainty: | See chapter 8 |

Results: Antenna port 1

| | Measured power [dBm] | Power from module test report [dBm] | Difference [dBm] |
|----------------|----------------------|-------------------------------------|------------------|
| a-mode | | | |
| 5180 MHz | 10.2 | 11.3 | -1.1 |
| 5200 MHz | 11.9 | 13.5 | -1.6 |
| 5240 MHz | 12.6 | 13.5 | -0.9 |
| 5260 MHz | 12.6 | 13.8 | -1.2 |
| 5300 MHz | 11.1 | 13.9 | -2.8 |
| 5320 MHz | 9.0 | 11.8 | -2.8 |
| 5500 MHz | 9.3 | 10.6 | -1.3 |
| 5600 MHz | 11.3 | 13.2 | -1.9 |
| 5700 MHz | 10.6 | 10.0 | 0.6 |
| 5745 MHz | 13.7 | 16.7 | -3.0 |
| 5785 MHz | 14.1 | 16.5 | -2.4 |
| 5825 MHz | 13.7 | 16.5 | -2.8 |
| n/ac HT20 mode | | | |
| 5180 MHz | 10.4 | 11.3 | -0.9 |
| 5200 MHz | 10.4 | 13.5 | -3.1 |
| 5240 MHz | 10.6 | 13.3 | -2.7 |
| 5260 MHz | 10.5 | 13.8 | -3.3 |
| 5300 MHz | 10.5 | 13.7 | -3.2 |
| 5320 MHz | 10.1 | 11.6 | -1.5 |
| 5500 MHz | 11.2 | 10.4 | 0.8 |
| 5600 MHz | 13.7 | 13.1 | 0.6 |
| 5700 MHz | 11.1 | 10.0 | 1.1 |
| 5745 MHz | 16.6 | 16.5 | 0.1 |
| 5785 MHz | 16.5 | 16.4 | 0.1 |
| 5825 MHz | 16.1 | 16.5 | -0.4 |
| n/ac HT40 mode | | | |
| 5190 MHz | 6.7 | 9.8 | -3.1 |
| 5230 MHz | 9.4 | 12.6 | -3.2 |
| 5270 MHz | 9.0 | 12.9 | -3.9 |
| 5310 MHz | 7.8 | 11.7 | -3.9 |
| 5510 MHz | 6.5 | 8.5 | -2.0 |
| 5590 MHz | 10.1 | 12.8 | -2.7 |
| 5670 MHz | 10.0 | 9.5 | 0.5 |
| 5755 MHz | 13.3 | 16.9 | -3.6 |
| 5795 MHz | 13.6 | 17.0 | -3.4 |
| ac80 mode | | | |
| 5180 MHz | 7.6 | 9.7 | -2.1 |
| 5200 MHz | 7.6 | 9.7 | -2.1 |
| 5240 MHz | 8.0 | 7.4 | 0.6 |
| 5260 MHz | 8.1 | 7.2 | 0.9 |
| 5300 MHz | 13.4 | 14.4 | -1.0 |

Results: Antenna port 2

| | Measured power [dBm] | Power from module test report [dBm] | Difference [dBm] |
|----------------|----------------------|-------------------------------------|------------------|
| n/ac HT20 mode | | | |
| 5180 MHz | 11.5 | 11.2 | 0.3 |
| 5200 MHz | 13.3 | 13.3 | 0.0 |
| 5240 MHz | 13.5 | 13.4 | 0.1 |
| 5260 MHz | 13.5 | 12.9 | 0.6 |
| 5300 MHz | 13.6 | 12.8 | 0.8 |
| 5320 MHz | 11.7 | 11.1 | 0.6 |
| 5500 MHz | 10.2 | 10.5 | -0.3 |
| 5600 MHz | 12.5 | 13.4 | -0.9 |
| 5700 MHz | 10.1 | 10.0 | 0.1 |
| 5745 MHz | 15.4 | 15.8 | -0.4 |
| 5785 MHz | 15.2 | 15.8 | -0.6 |
| 5825 MHz | 15.0 | 15.7 | -0.7 |
| n/ac HT40 mode | | | |
| 5190 MHz | 9.0 | 9.7 | -0.7 |
| 5230 MHz | 12.3 | 12.8 | -0.5 |
| 5270 MHz | 12.2 | 12.5 | -0.3 |
| 5310 MHz | 11.0 | 11.5 | -0.5 |
| 5510 MHz | 8.5 | 8.5 | 0.0 |
| 5590 MHz | 12.0 | 12.8 | -0.8 |
| 5670 MHz | 9.0 | 9.6 | -0.6 |
| 5755 MHz | 11.9 | 16.7 | -4.8 |
| 5795 MHz | 12.2 | 16.4 | -4.2 |
| ac80 mode | | | |
| 5180 MHz | 8.7 | 9.6 | -0.9 |
| 5200 MHz | 8.9 | 9.2 | -0.3 |
| 5240 MHz | 6.8 | 7.0 | -0.2 |
| 5260 MHz | 6.9 | 6.6 | 0.3 |
| 5300 MHz | 12.5 | 13.7 | -1.2 |

11.4 Maximum output power

11.4.1 Maximum output power according to FCC requirements

Description:

Measurement of the maximum output power conducted

Measurement:

| Measurement parameter | |
|-------------------------------------|--|
| According to: KDB789033 D02, E.2.e. | |
| Detector: | RMS |
| Sweep time: | $\geq 10 \cdot (\text{swp points}) \cdot (\text{total on/off time})$ |
| Resolution bandwidth: | 1 MHz |
| Video bandwidth: | 3 MHz |
| Span: | > EBW |
| Trace mode: | Max hold |
| Analyzer function | Band power / channel power Interval > 26 dB EBW |
| Used test setup: | See chapter 6.4 – A |
| Measurement uncertainty: | See chapter 8 |

Limits:

| Radiated output power | Conducted output power for mobile equipment |
|--------------------------------------|--|
| Conducted power + 6 dBi antenna gain | 250mW 5.150-5.250 GHz The lesser one of 250mW or 11 dBm + 10 log Bandwidth 5.250-5.350 GHz 250mW or 11 dBm + 10 log Bandwidth 5.470-5.725 GHz (where Bandwidth is the 26dB Bandwidth [MHz]) 1W 5.725-5.85 GHz |

Results: Antenna port 1

| a | Maximum output power conducted [dBm] | | |
|---|--------------------------------------|----------------|-----------------|
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 10.2 | 11.9 | 12.6 |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 12.6 | 11.1 | 9.0 |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 9.3 | 11.3 | 10.6 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 13.7 | 14.1 | 13.7 |

Results: Antenna port 1

| n/ac HT20 | Maximum output power conducted [dBm] | | |
|-----------|--------------------------------------|----------------|-----------------|
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 10.4 | 10.4 | 10.6 |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 10.5 | 10.5 | 10.1 |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 11.2 | 13.7 | 11.1 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 16.6 | 16.5 | 16.1 |

Results: Antenna port 1

| | | | |
|------------------|---|----------------|-----------------|
| n/ac HT40 | Maximum output power conducted [dBm] | | |
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Lowest channel | | Highest channel |
| | 6.7 | | 9.4 |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Lowest channel | | Highest channel |
| | 9.0 | | 7.8 |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 6.5 | 10.1 | 10.0 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Lowest channel | | Highest channel |
| | 13.3 | | 13.6 |

Results: Antenna port 1

| | | | |
|-------------|---|--|-----------------|
| ac80 | Maximum output power conducted [dBm] | | |
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Middle channel | | |
| | 7.6 | | |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Middle channel | | |
| | 7.6 | | |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | | Highest channel |
| | 8.0 | | 8.1 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Middle channel | | |
| | 13.4 | | |

Results: Antenna port 2

| n/ac HT20 | Maximum output power conducted [dBm] | | |
|-----------|--------------------------------------|----------------|-----------------|
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 11.5 | 13.3 | 13.5 |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 13.5 | 13.6 | 11.7 |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 10.2 | 12.5 | 10.1 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 15.4 | 15.2 | 15.0 |

Results: Antenna port 2

| | | | |
|-----------|--------------------------------------|-----------------|-----------------|
| n/ac HT40 | Maximum output power conducted [dBm] | | |
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Lowest channel | Highest channel | |
| | 9.0 | 12.3 | |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Lowest channel | Highest channel | |
| | 12.2 | 11.0 | |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 8.5 | 12.0 | 9.0 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Lowest channel | Highest channel | |
| | 11.9 | 12.2 | |

Results: Antenna port 2

| ac80 | Maximum output power conducted [dBm] | |
|-------------|--------------------------------------|-----------------|
| | U-NII-1 (5150 MHz to 5250 MHz) | |
| | Middle channel | |
| | 8.1 | |
| | U-NII-2A (5250 MHz to 5350 MHz) | |
| | Middle channel | |
| | 8.9 | |
| | U-NII-2C (5470 MHz to 5725 MHz) | |
| | Lowest channel | Highest channel |
| | 6.8 | 6.9 |
| | U-NII-3 (5725 MHz to 5850 MHz) | |
| | Middle channel | |
| | 12.5 | |

Results: Antenna port 1+2 (calculated)

| n/ac HT20 | Maximum output power conducted [dBm] | | |
|------------------|--------------------------------------|----------------|-----------------|
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 14.0 | 15.1 | 15.3 |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 15.3 | 15.3 | 14.0 |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 13.7 | 16.2 | 13.6 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 19.1 | 18.9 | 18.6 |

Results: Antenna port 1+2 (calculated)

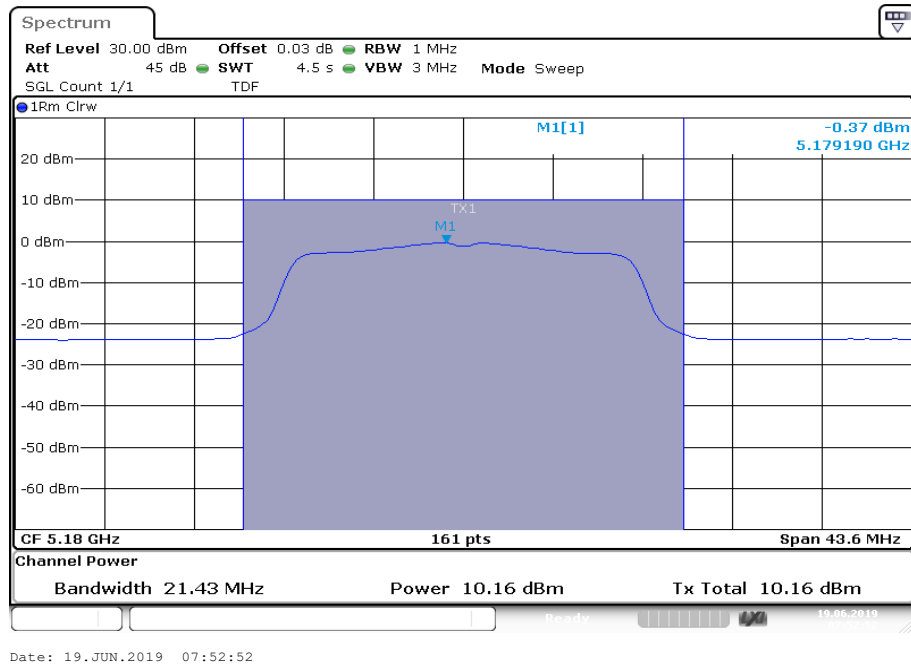
| | | | |
|------------------|---|----------------|-----------------|
| n/ac HT40 | Maximum output power conducted [dBm] | | |
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Lowest channel | | Highest channel |
| | 11.0 | | 14.1 |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Lowest channel | | Highest channel |
| | 13.9 | | 12.7 |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | 10.6 | 14.2 | 12.5 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Lowest channel | | Highest channel |
| | 15.7 | | 16.0 |

Results: Antenna port 1+2 (calculated)

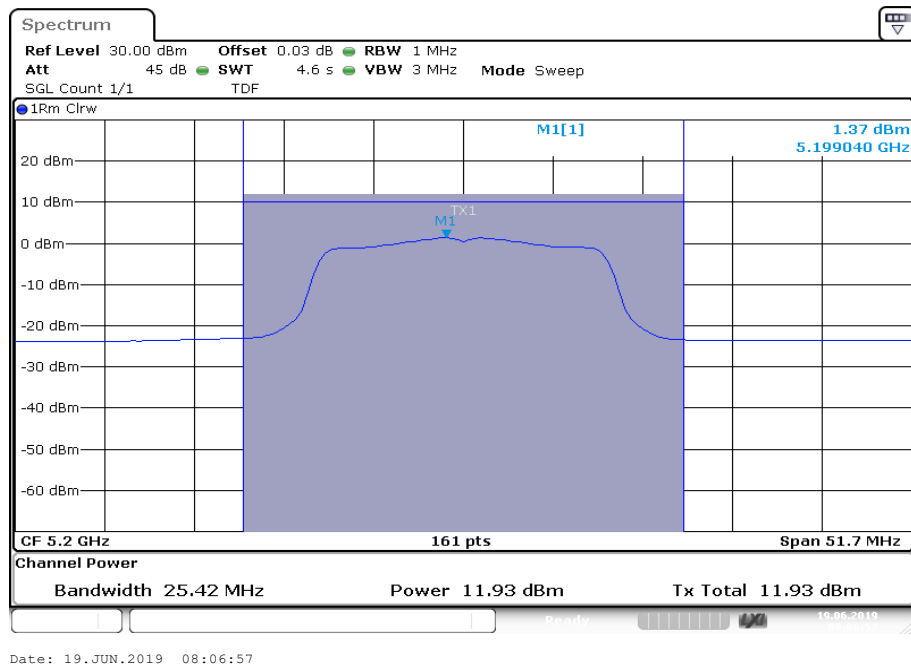
| | | | |
|-------------|---|--|-----------------|
| ac80 | Maximum output power conducted [dBm] | | |
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Middle channel | | |
| | 10.9 | | |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Middle channel | | |
| | 11.3 | | |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | | Highest channel |
| | 10.5 | | 10.6 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Middle channel | | |
| | 16.0 | | |

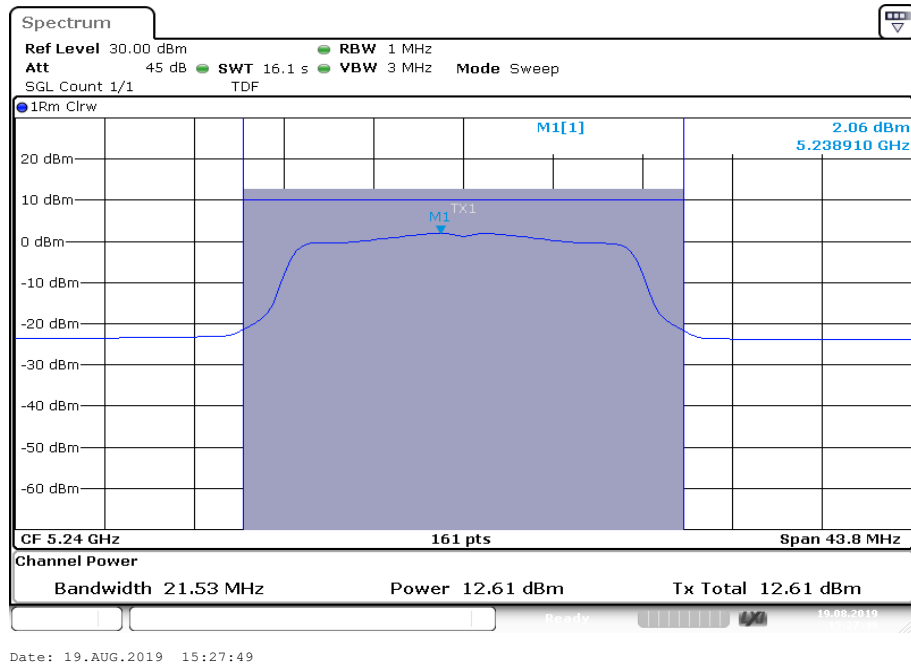
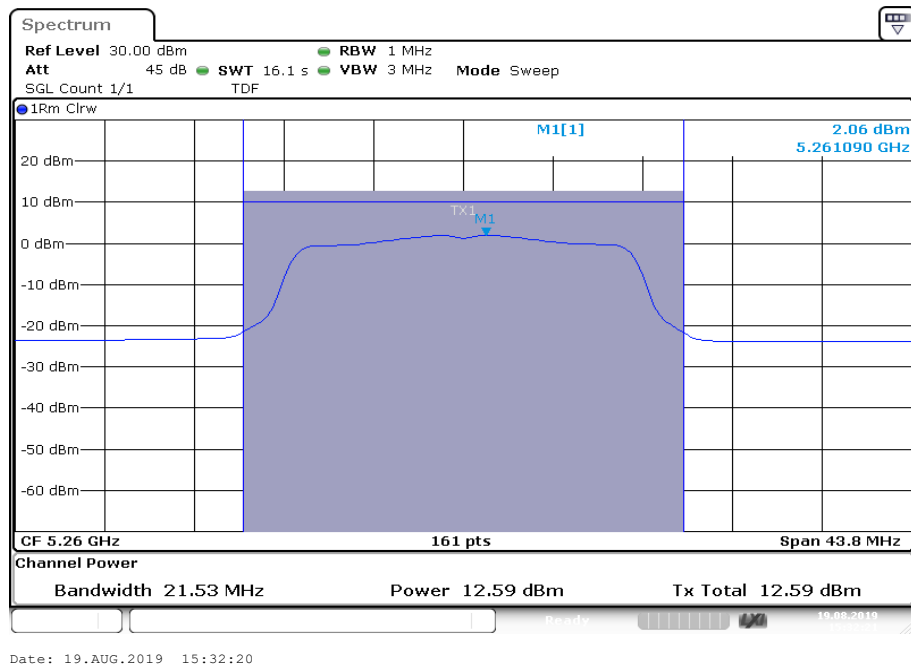
Plots: a – mode, Antenna port 1

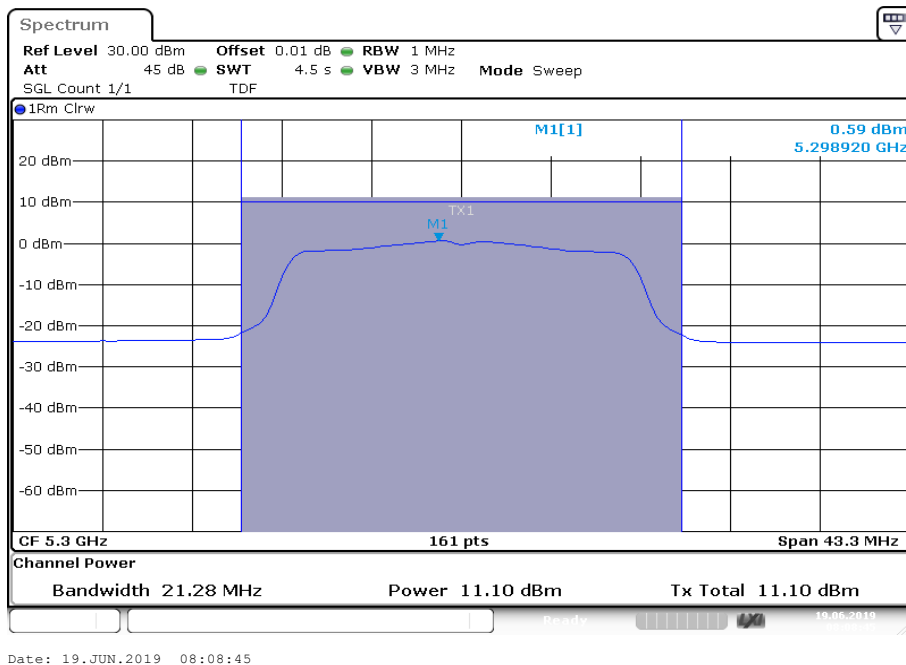
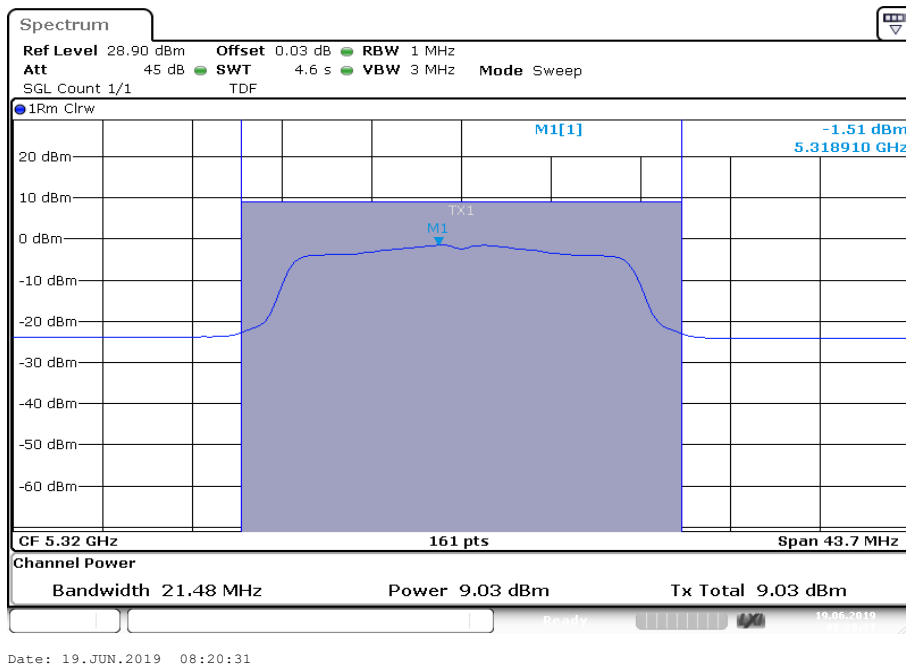
Plot 1: U-NII-1; lowest channel

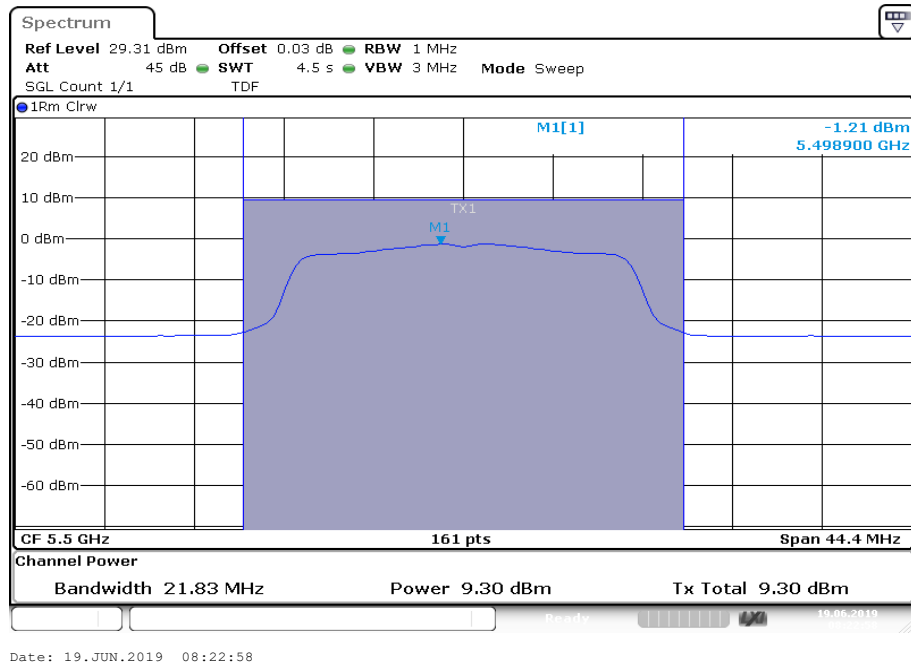
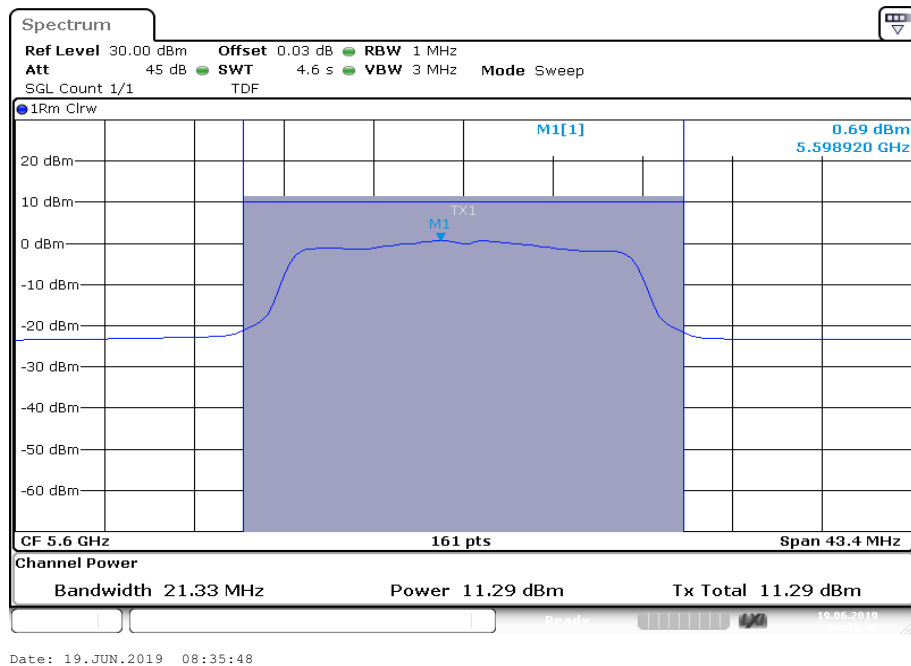


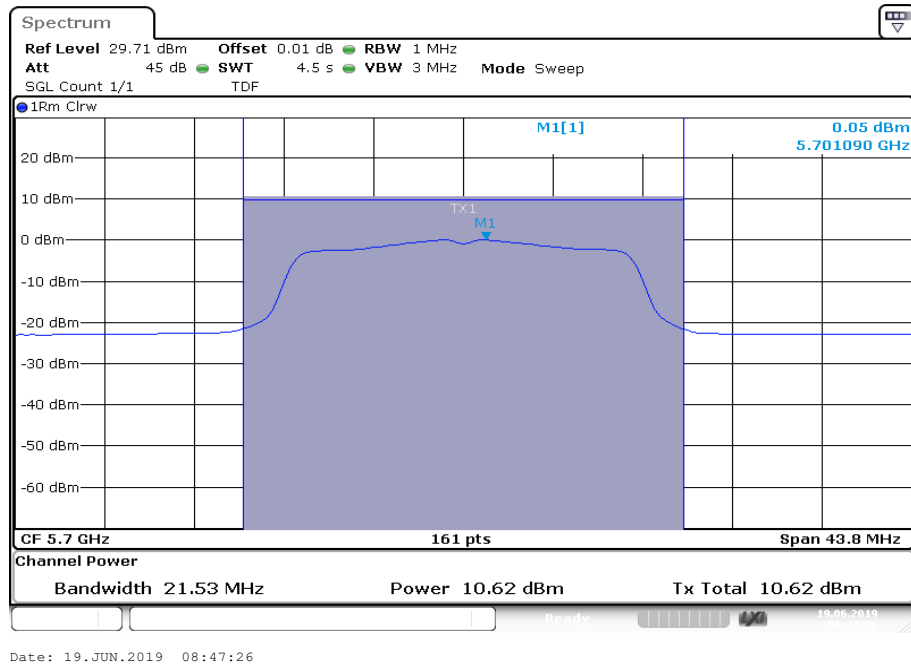
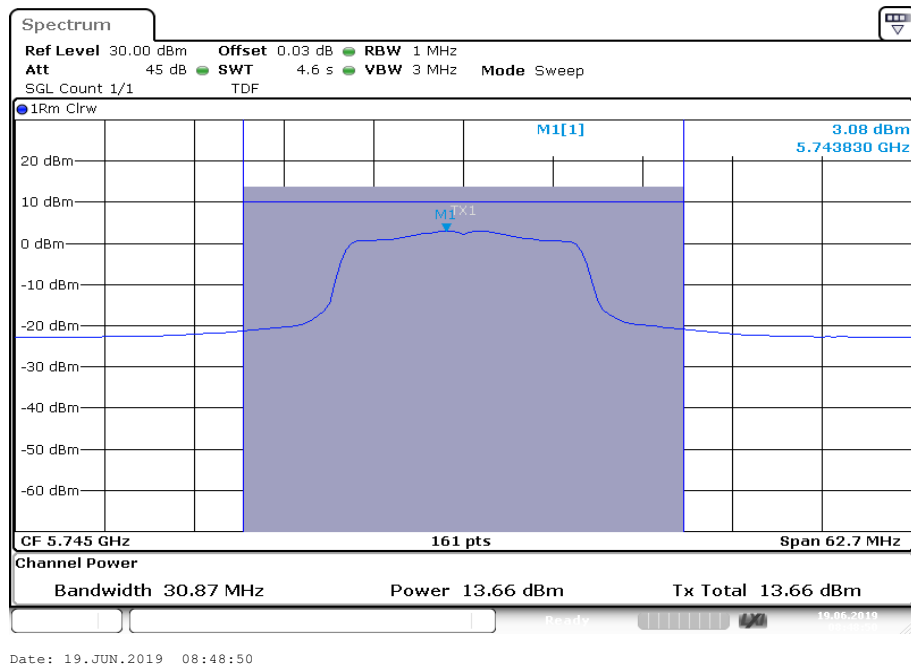
Plot 2: U-NII-1; middle channel

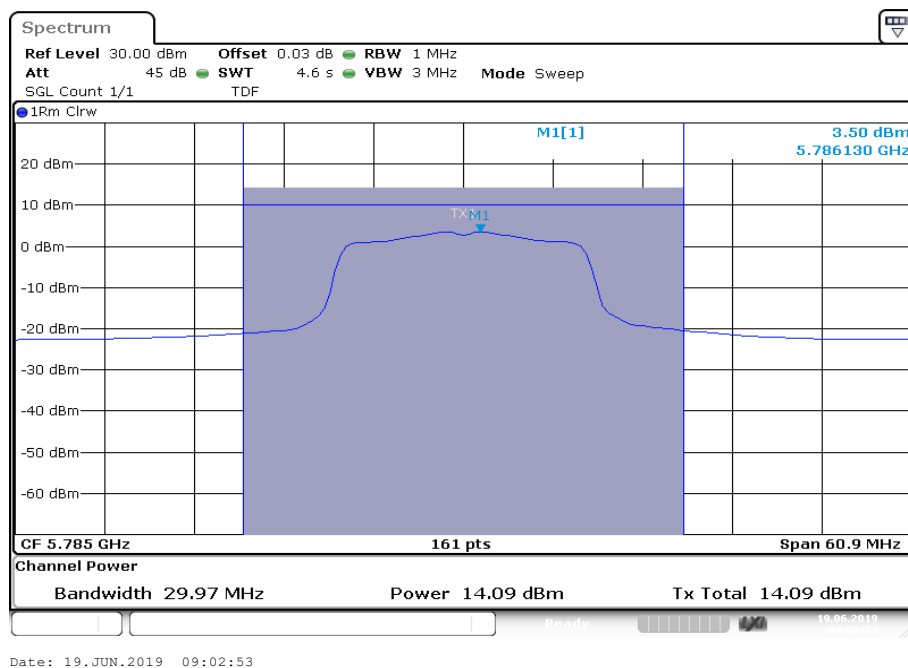
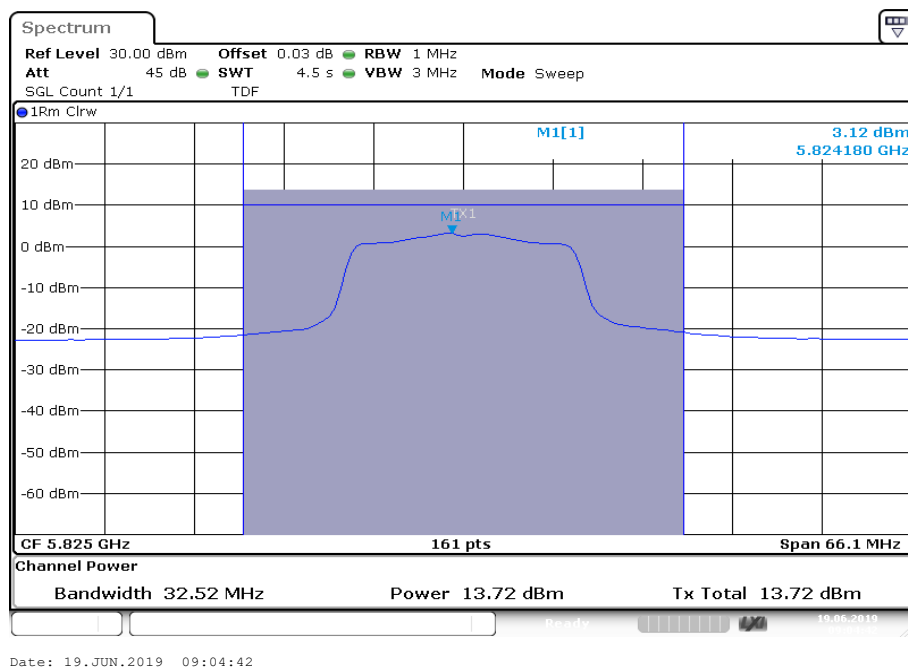


Plot 3: U-NII-1; highest channel**Plot 4:** U-NII-2A; lowest channel

Plot 5: U-NII-2A; middle channel**Plot 6:** U-NII-2A; highest channel

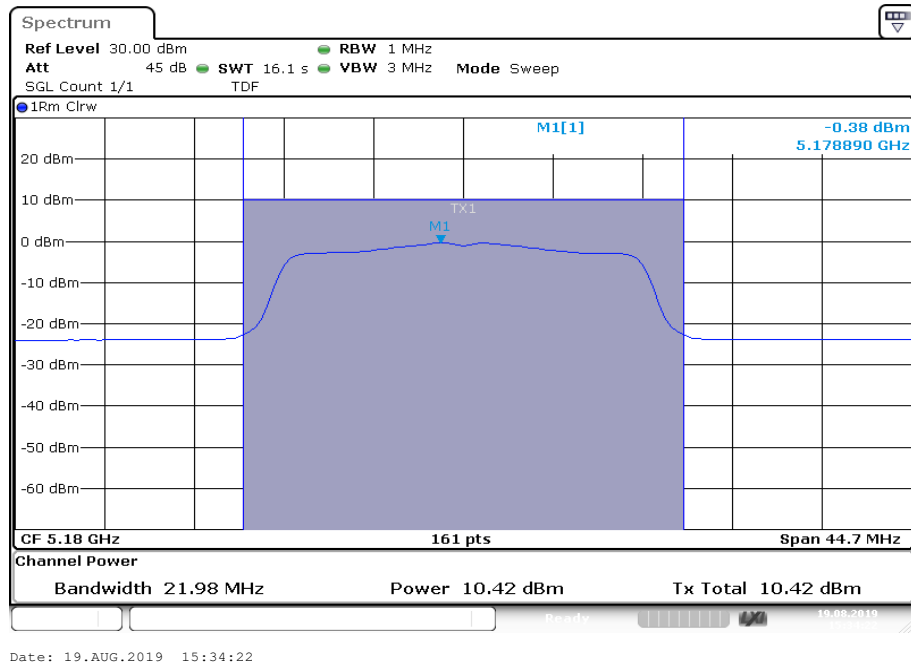
Plot 7: U-NII-2C; lowest channel**Plot 8:** U-NII-2C; middle channel

Plot 9: U-NII-2C; highest channel**Plot 10:** U-NII-3; lowest channel

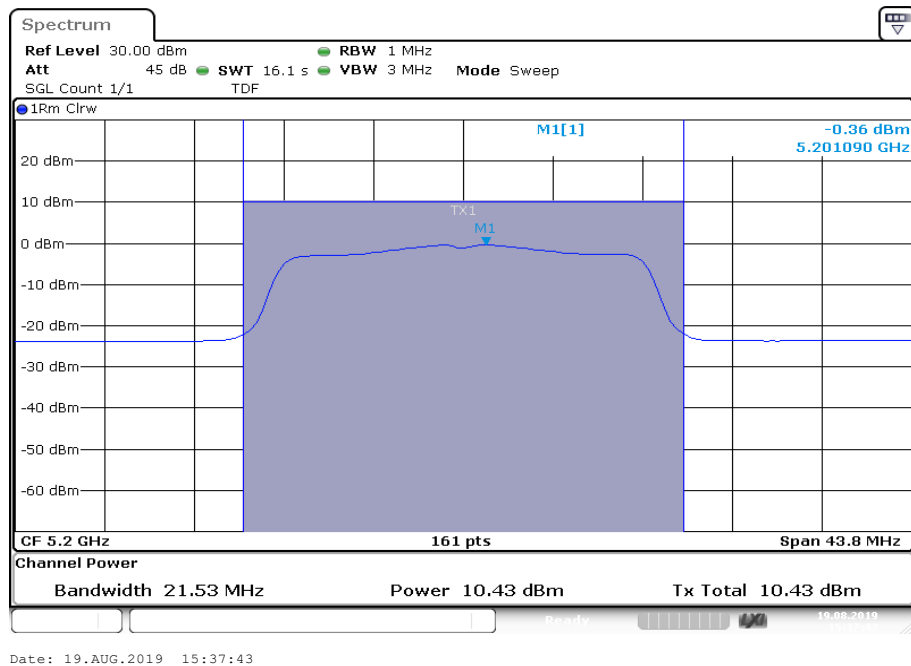
Plot 11: U-NII-3; middle channel**Plot 12:** U-NII-3; highest channel

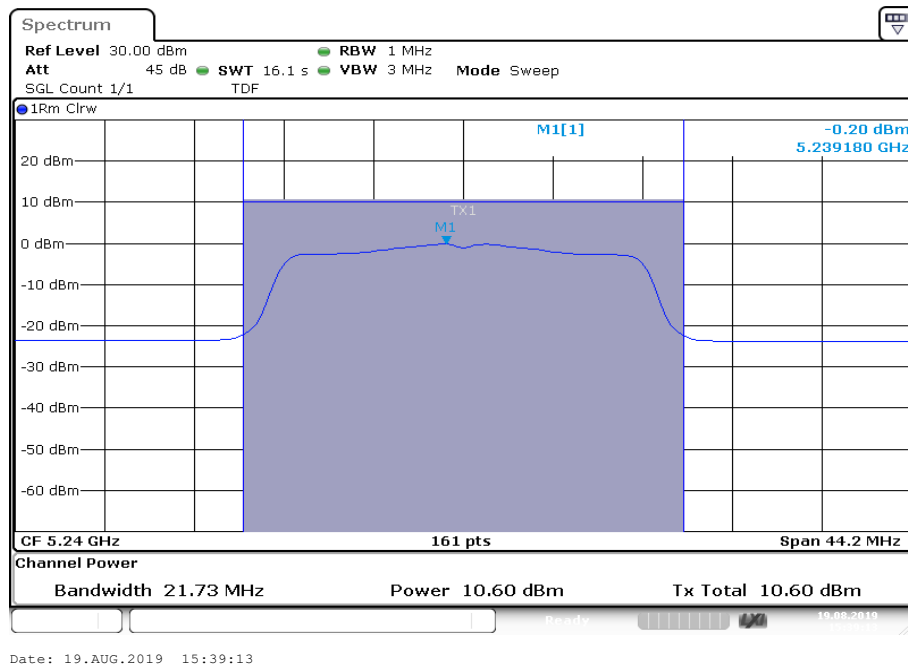
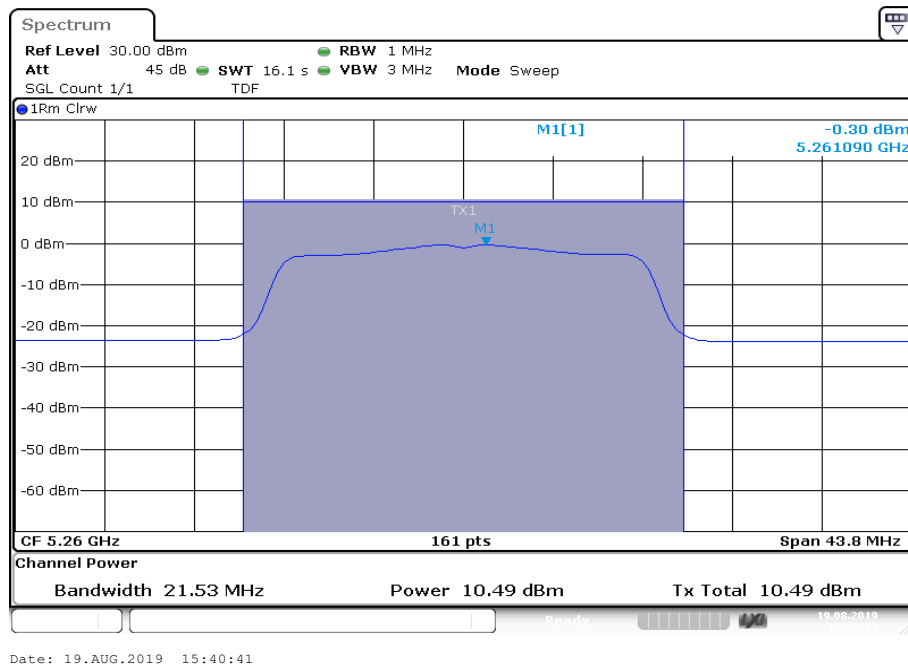
Plots: n/ac HT20 – mode, Antenna port 1

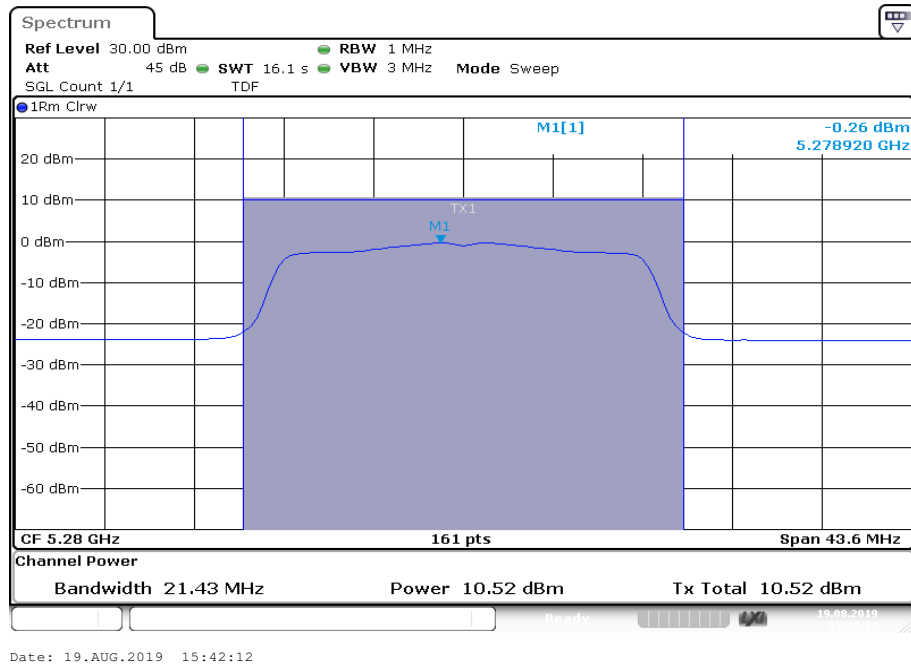
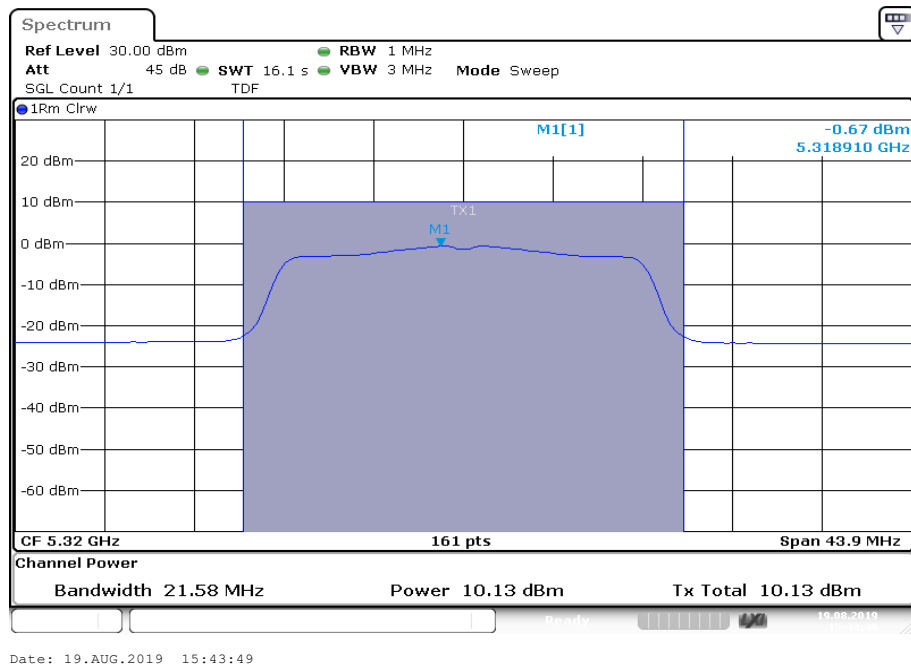
Plot 1: U-NII-1; lowest channel

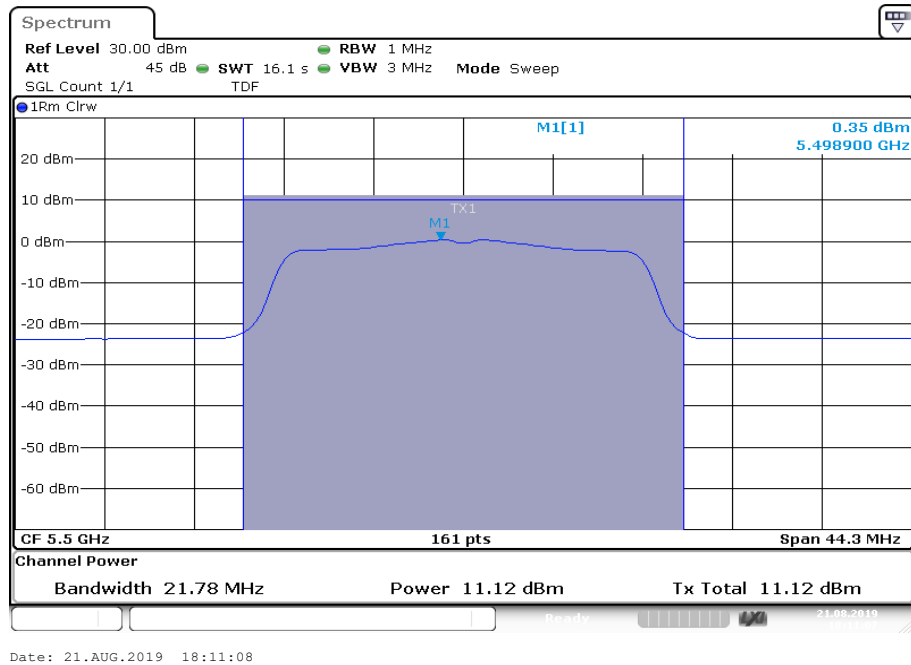
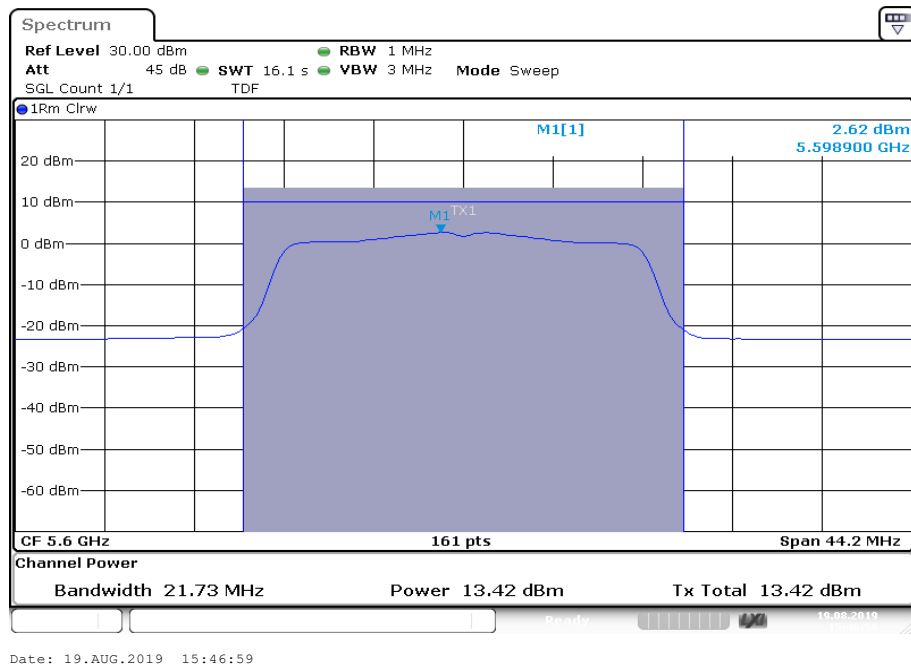


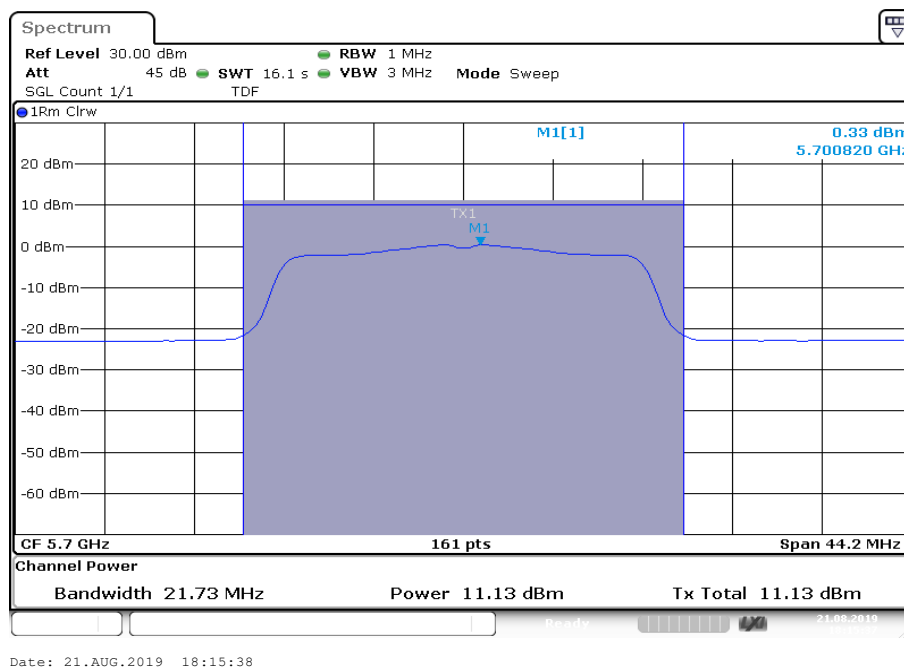
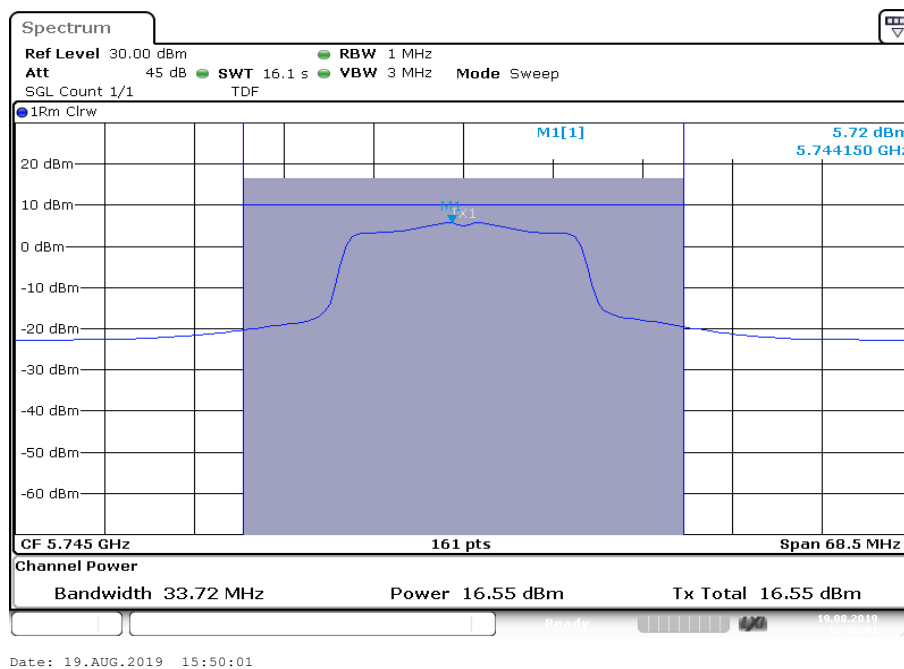
Plot 2: U-NII-1; middle channel

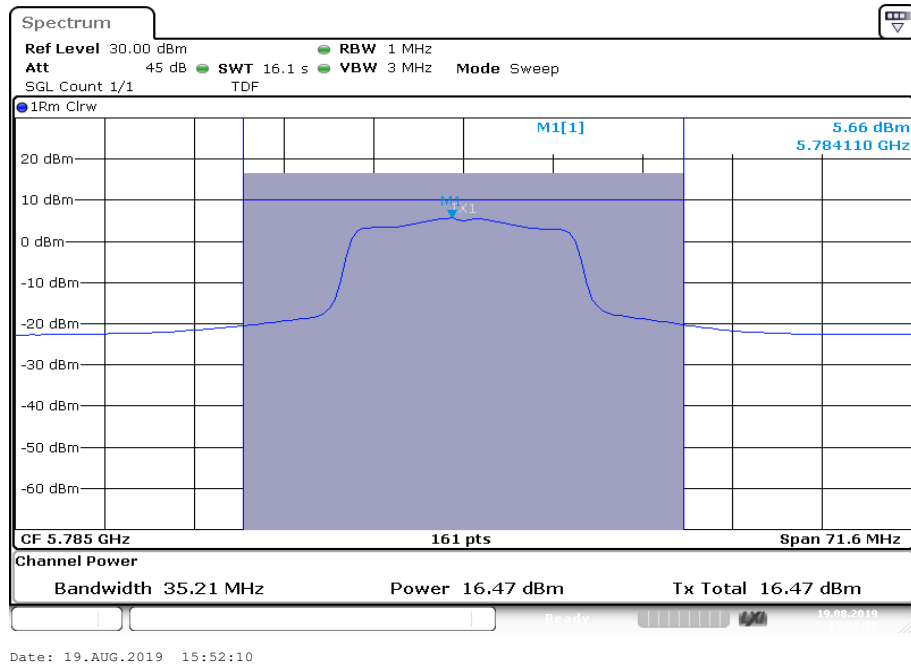
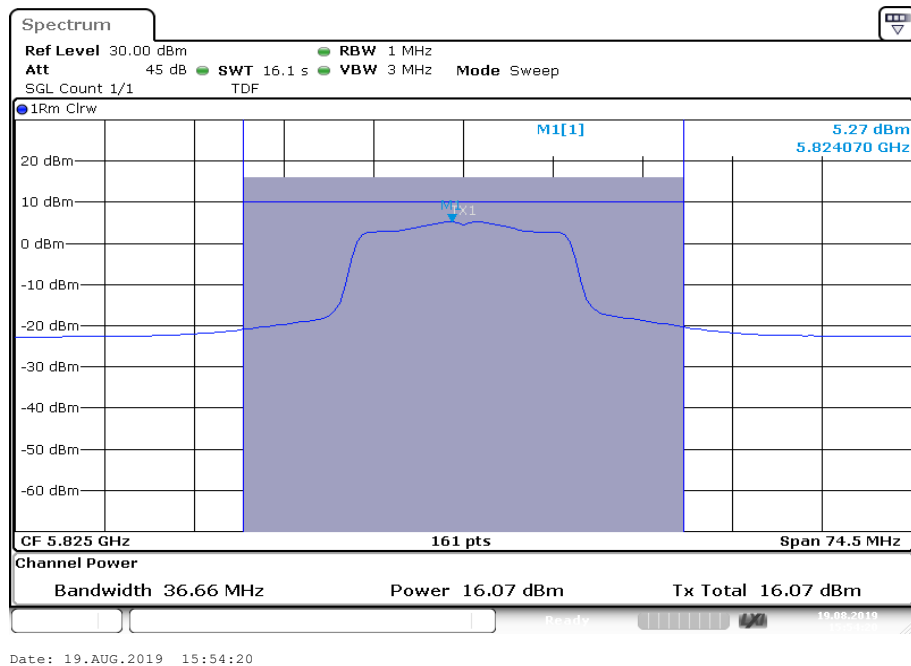


Plot 3: U-NII-1; highest channel**Plot 4:** U-NII-2A; lowest channel

Plot 5: U-NII-2A; middle channel**Plot 6:** U-NII-2A; highest channel

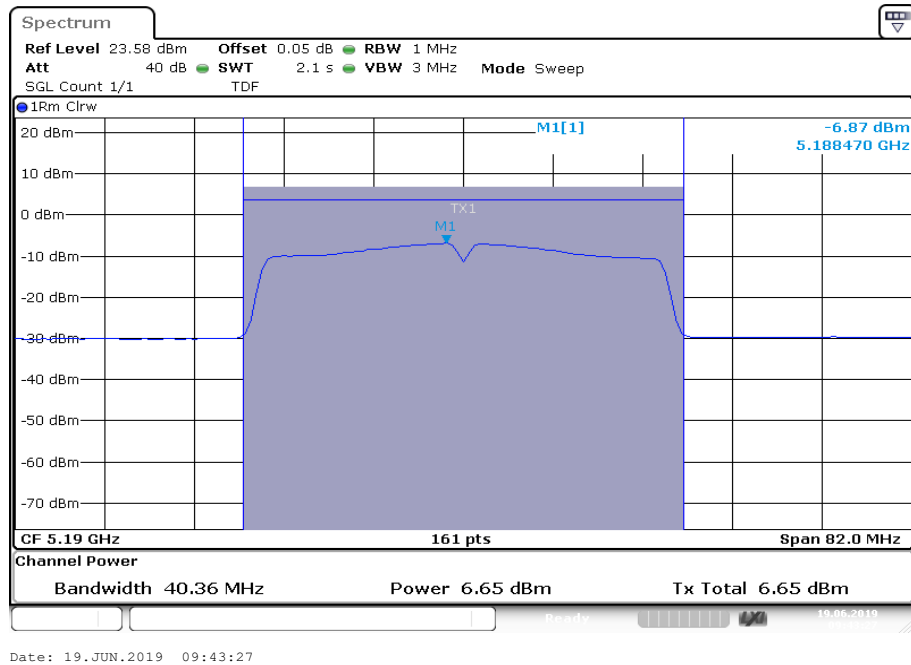
Plot 7: U-NII-2C; lowest channel**Plot 8:** U-NII-2C; middle channel

Plot 9: U-NII-2C; highest channel**Plot 10:** U-NII-3; lowest channel

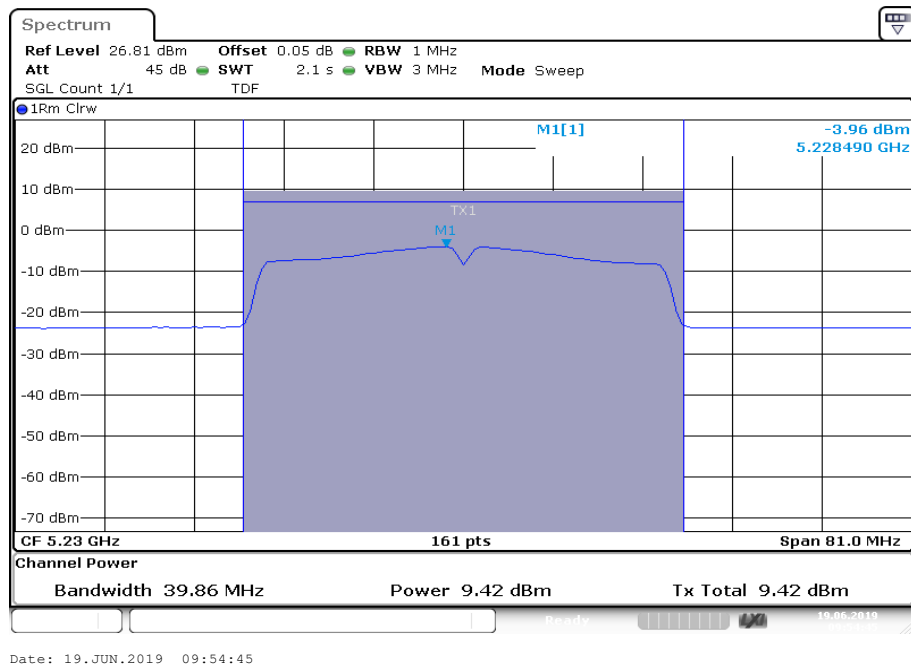
Plot 11: U-NII-3; middle channel**Plot 12:** U-NII-3; highest channel

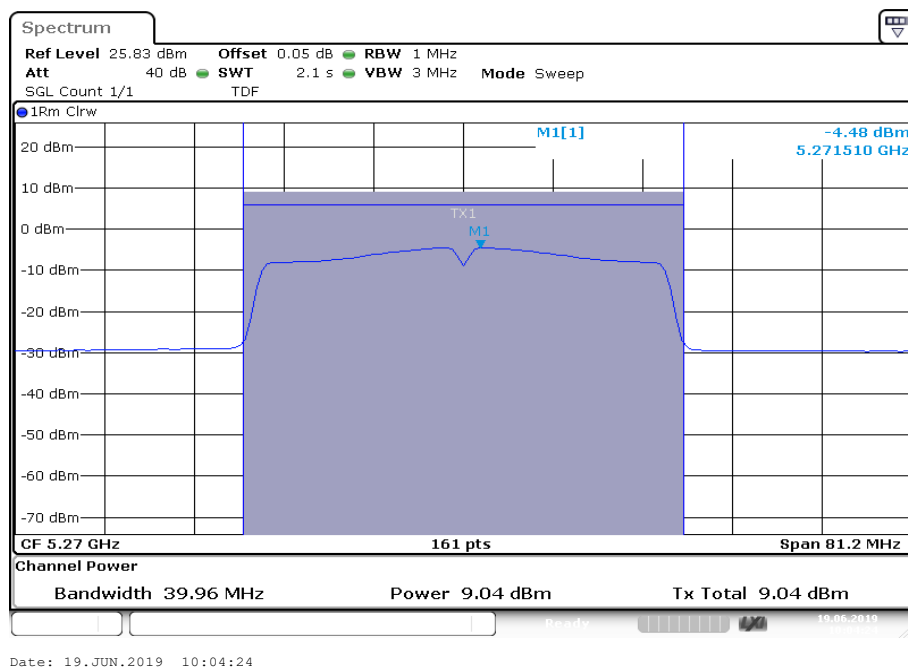
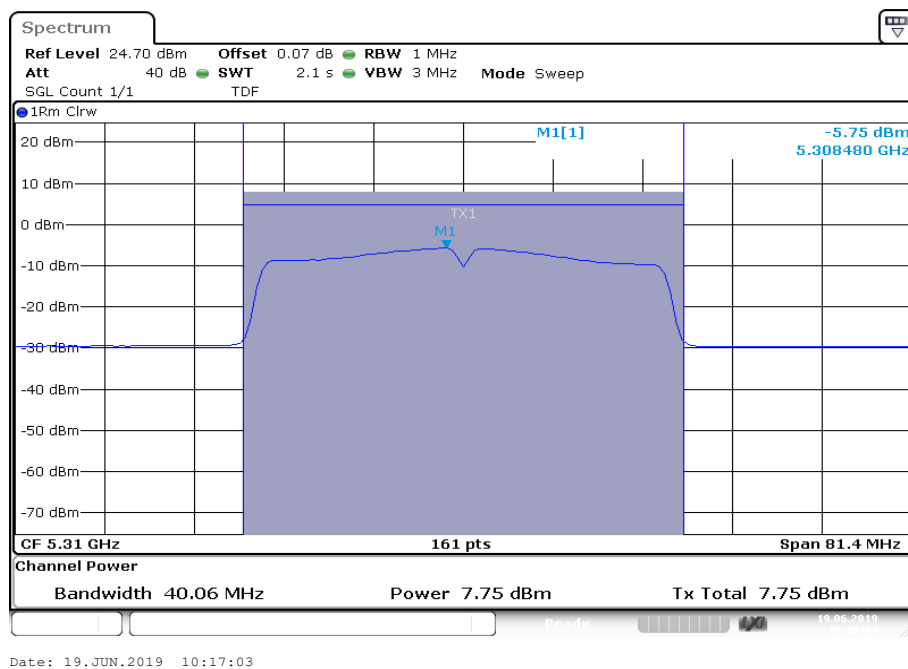
Plots: n/ac HT40 – mode, Antenna port 1

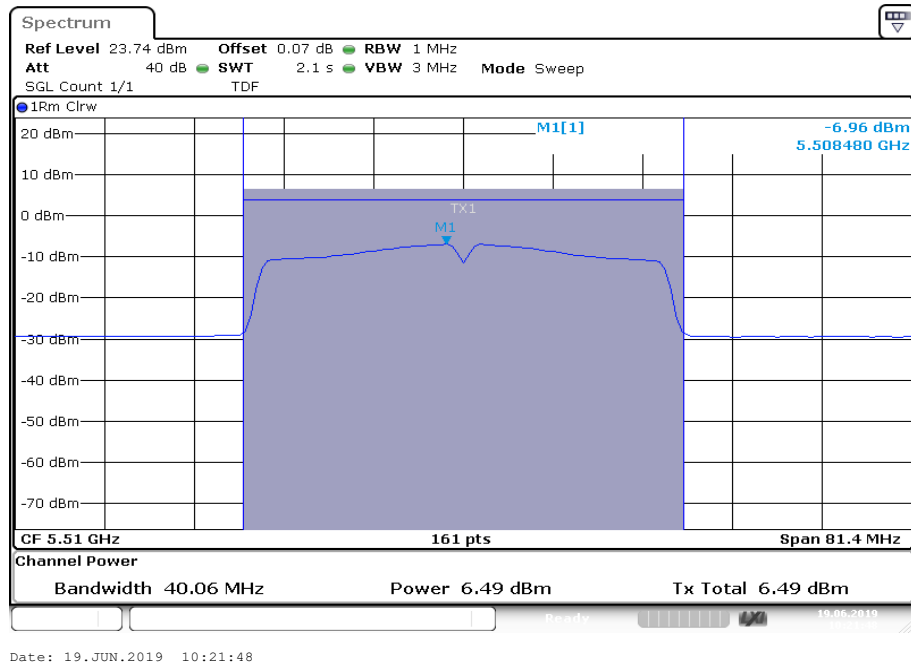
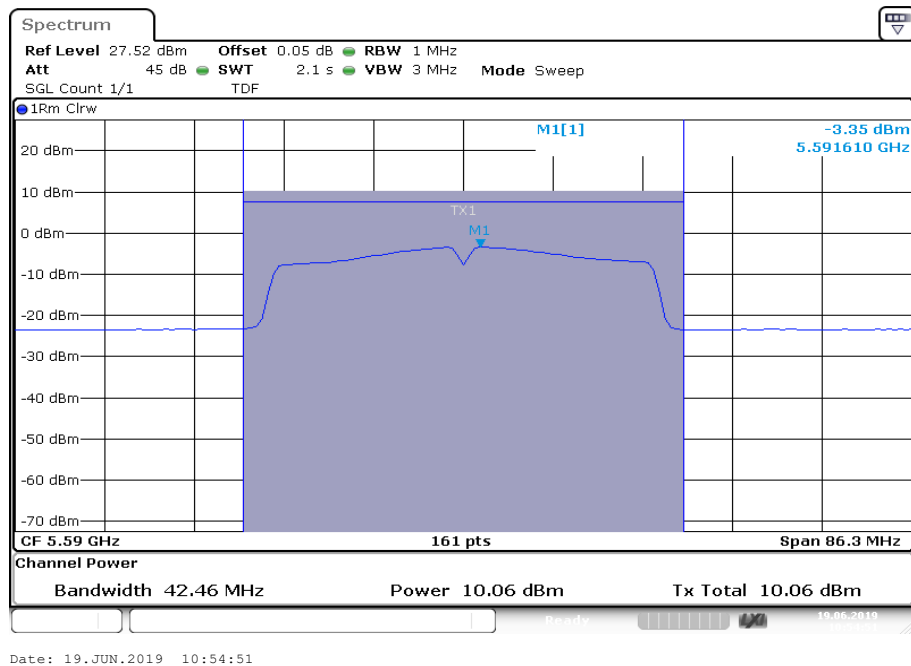
Plot 1: U-NII-1; lowest channel

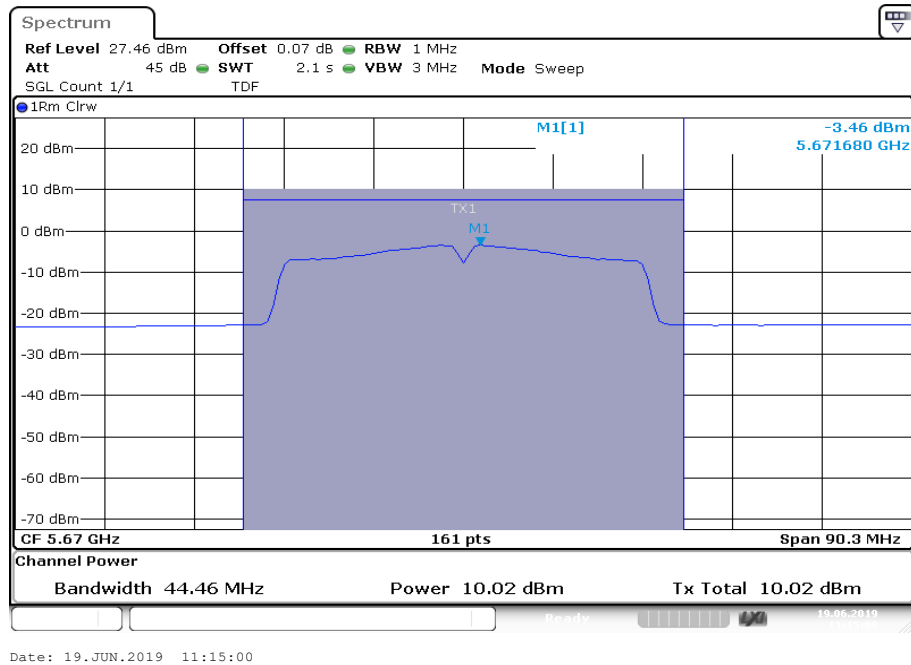
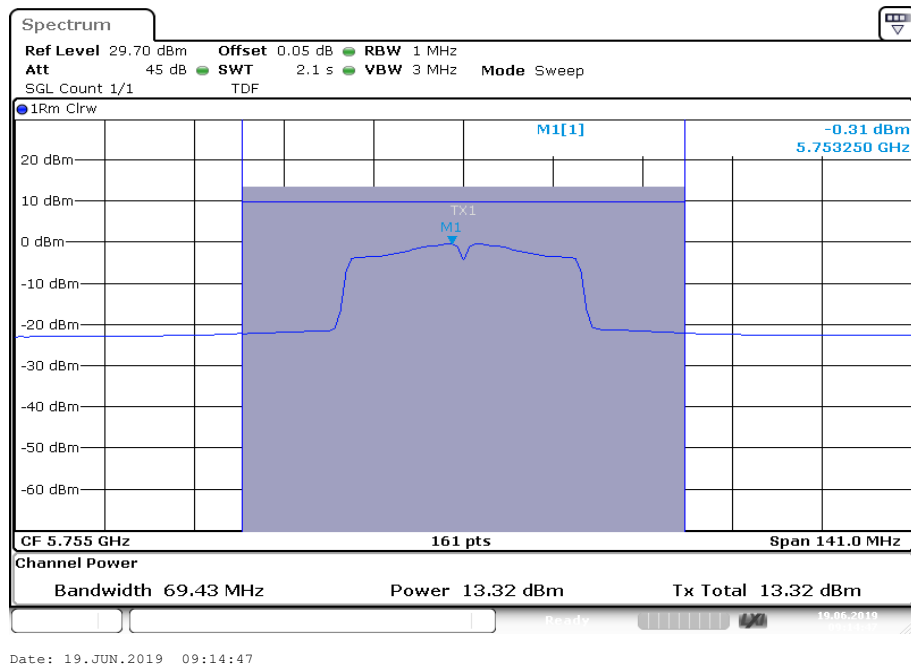


Plot 2: U-NII-1; highest channel

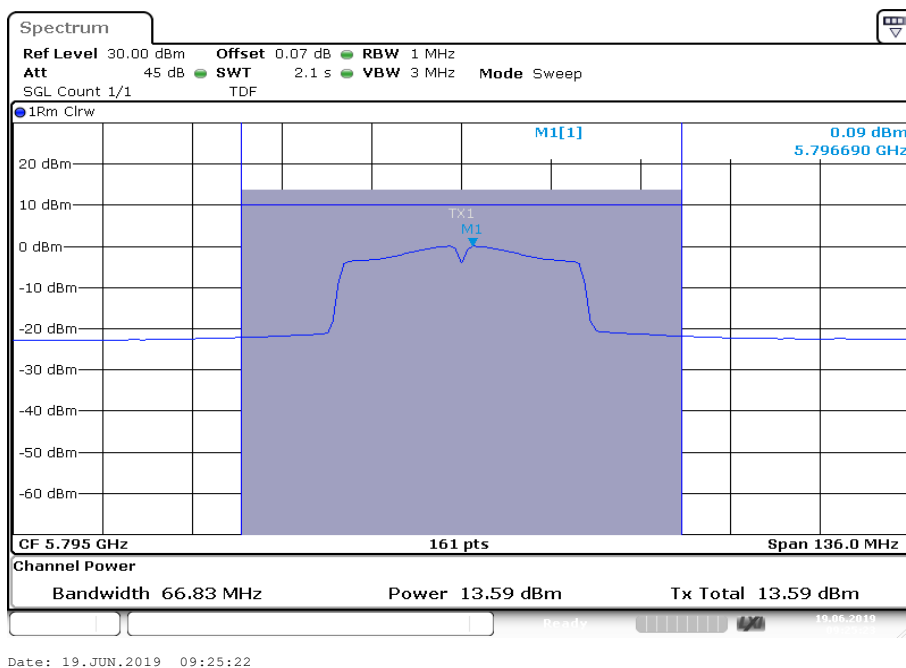


Plot 3: U-NII-2A; lowest channel**Plot 4:** U-NII-2A; highest channel

Plot 5: U-NII-2C; lowest channel**Plot 6:** U-NII-2C; middle channel

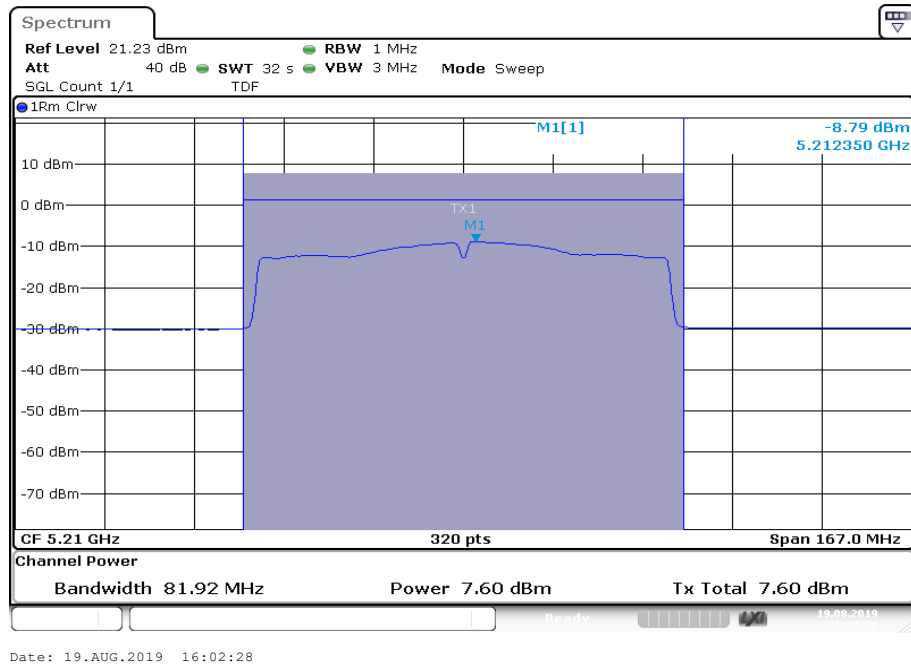
Plot 7: U-NII-2C; highest channel**Plot 8:** U-NII-3; lowest channel

Plot 9: U-NII-3; highest channel

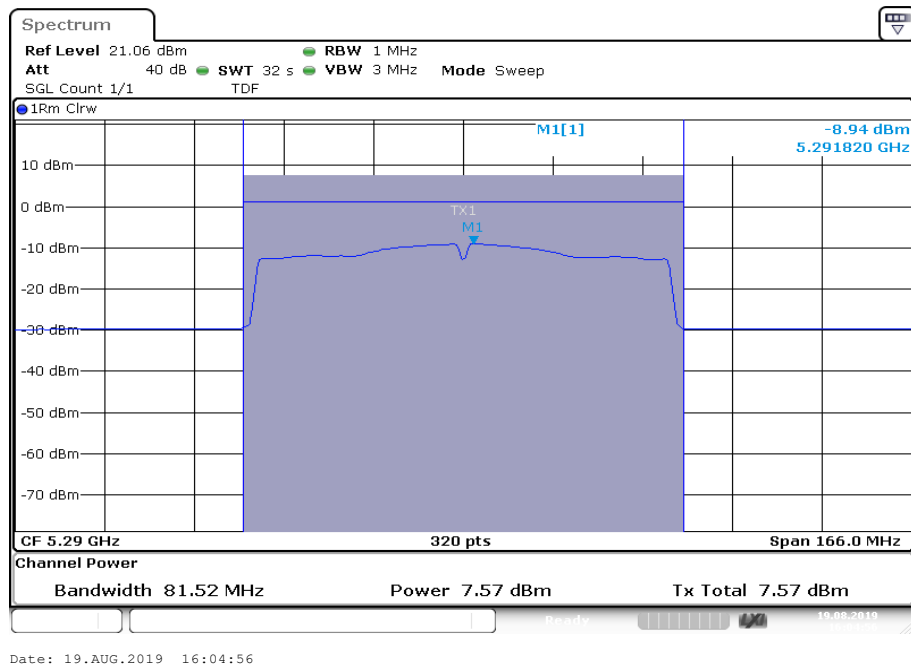


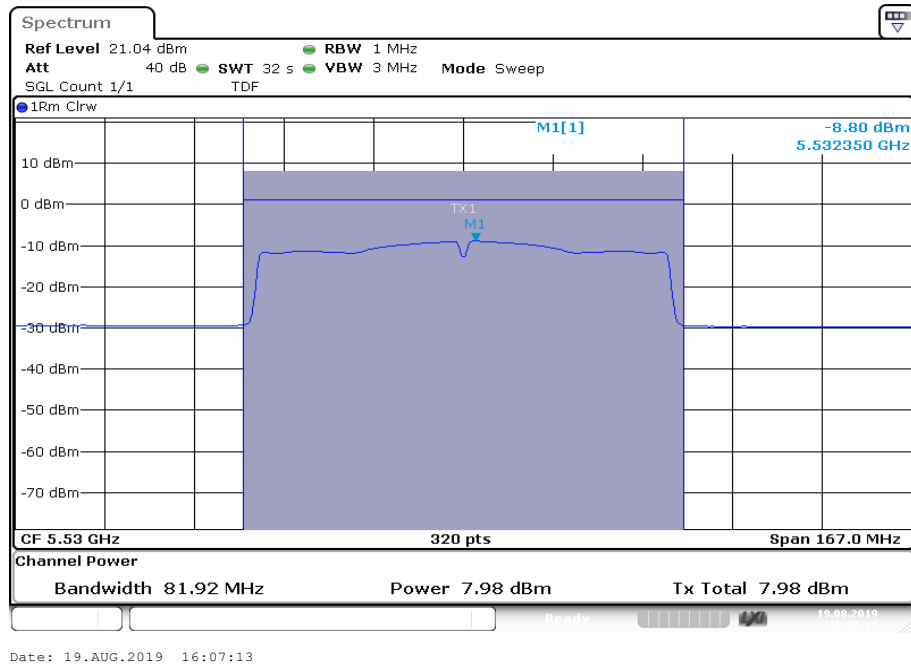
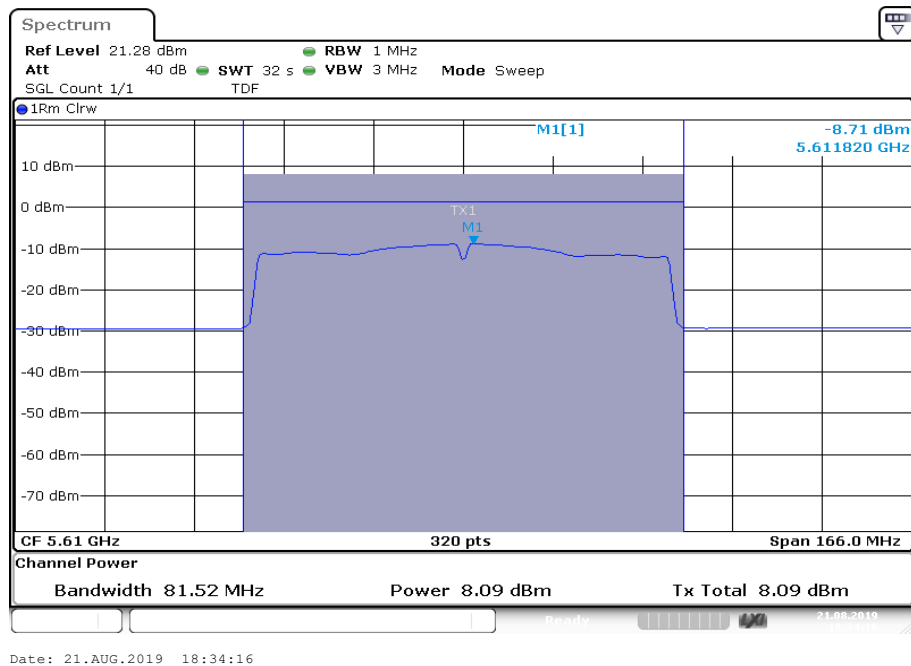
Plots: ac80– mode, Antenna port 1

Plot 1: U-NII-1; middle channel

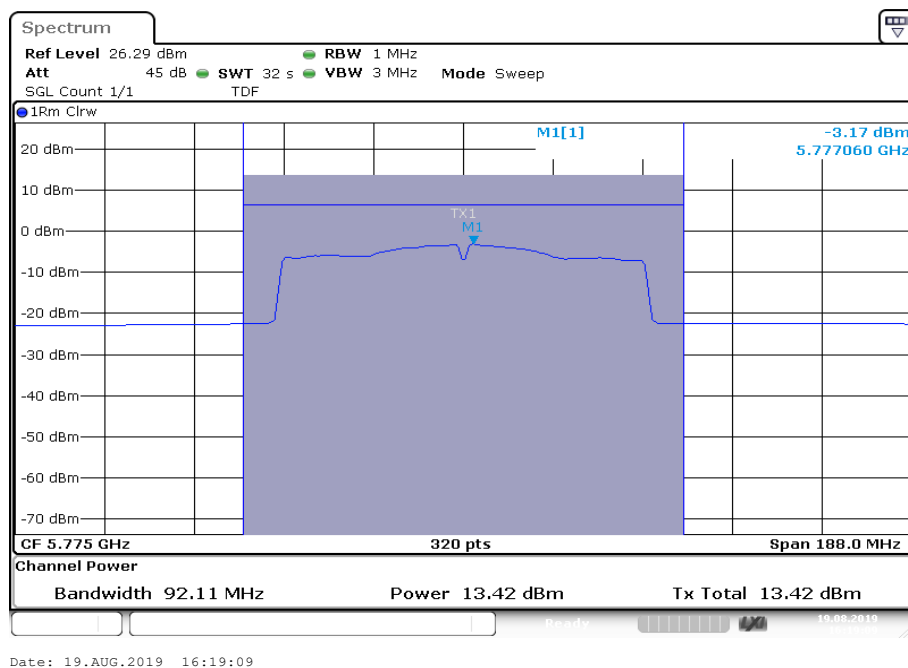


Plot 2: U-NII-2A; middle channel



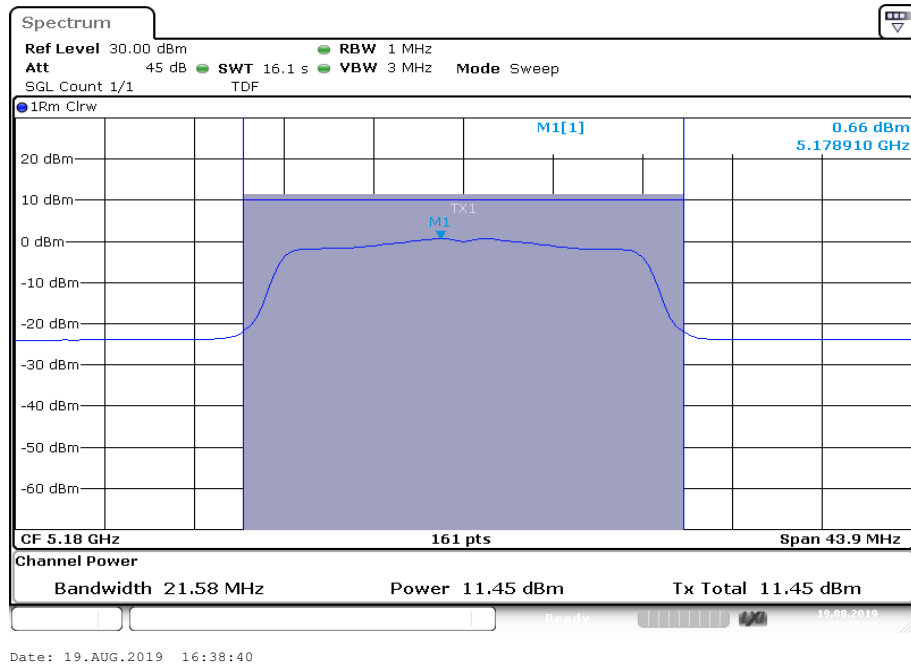
Plot 3: U-NII-2C; lowest channel**Plot 4:** U-NII-2C; highest channel

Plot 5: U-NII-3; middle channel

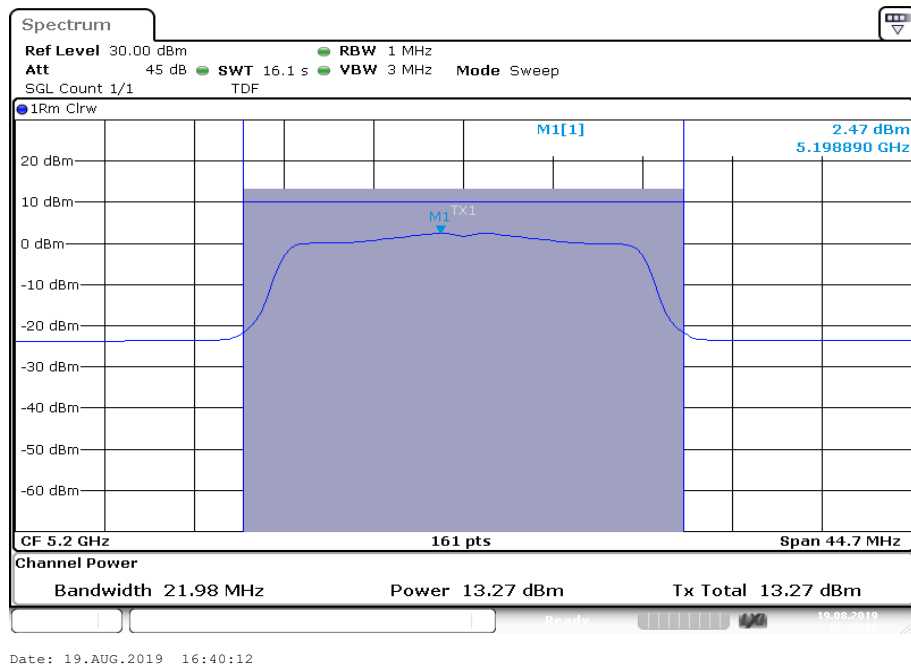


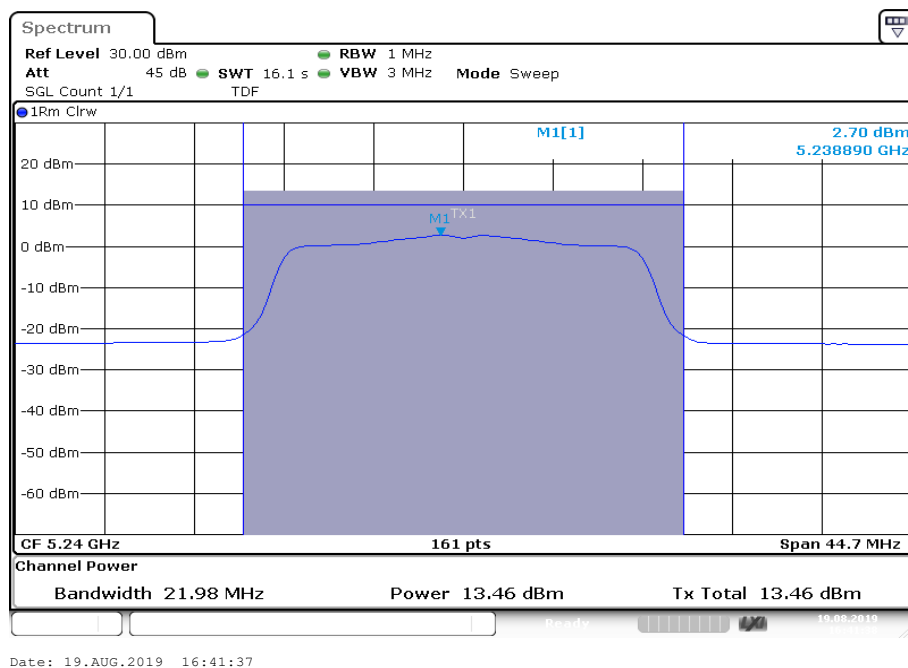
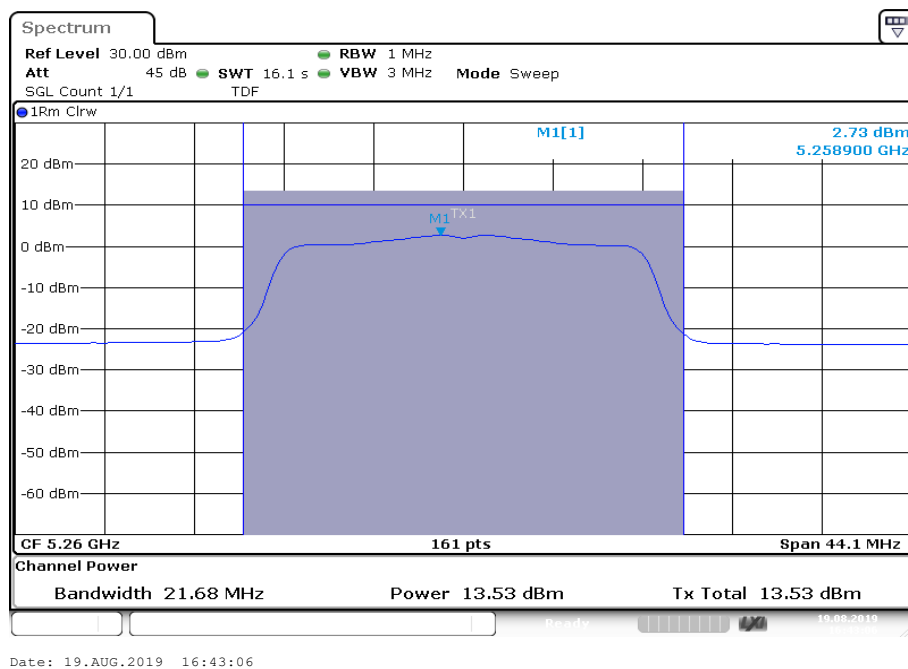
Plots: n/ac HT20 – mode, Antenna port 2

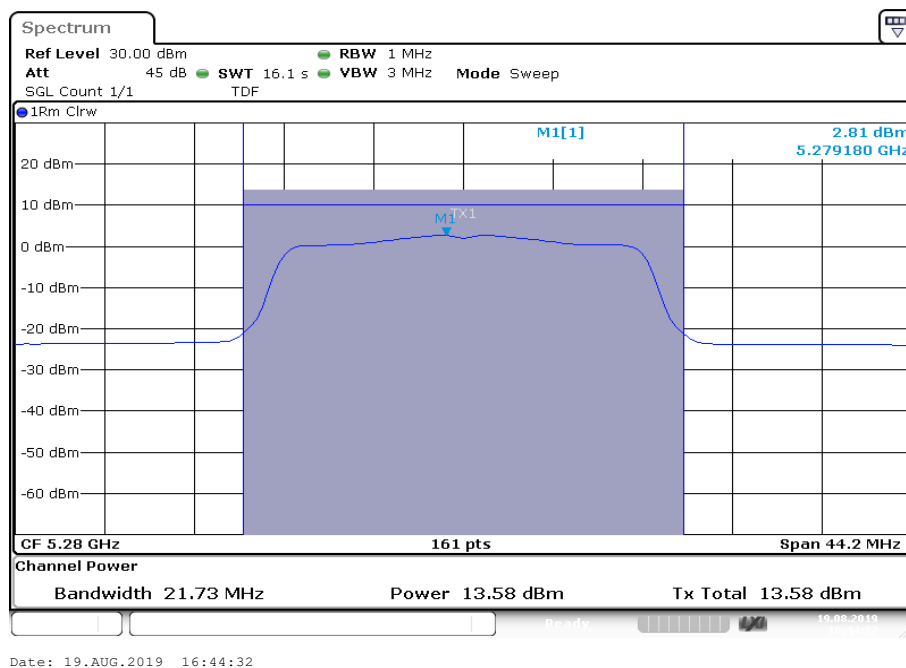
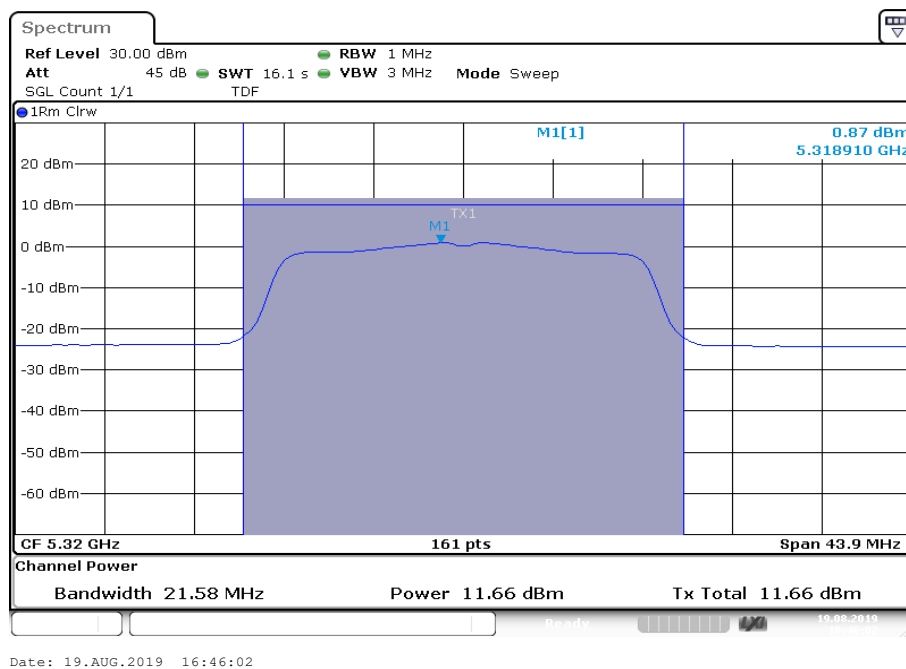
Plot 1: U-NII-1; lowest channel

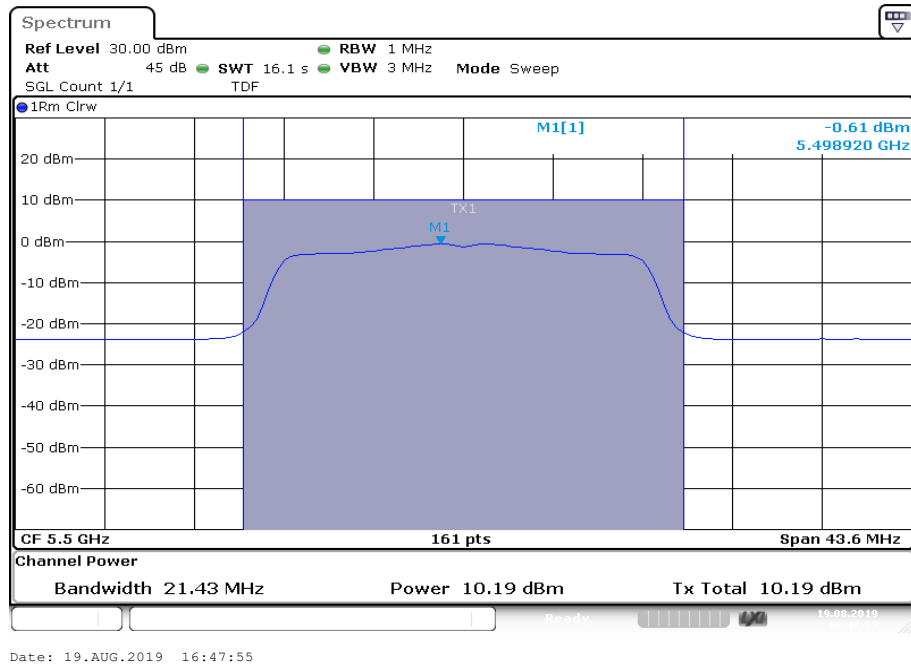
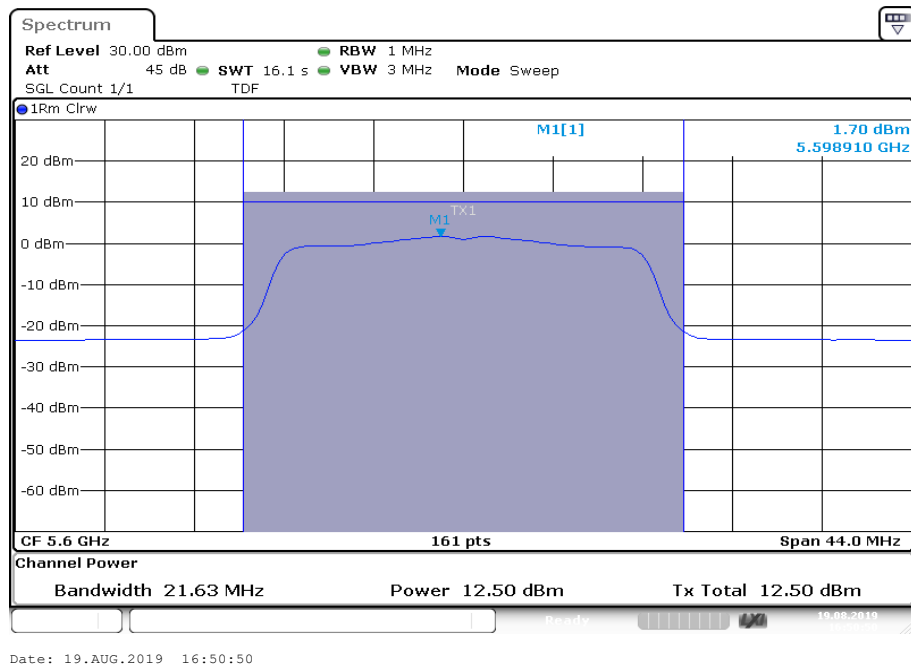


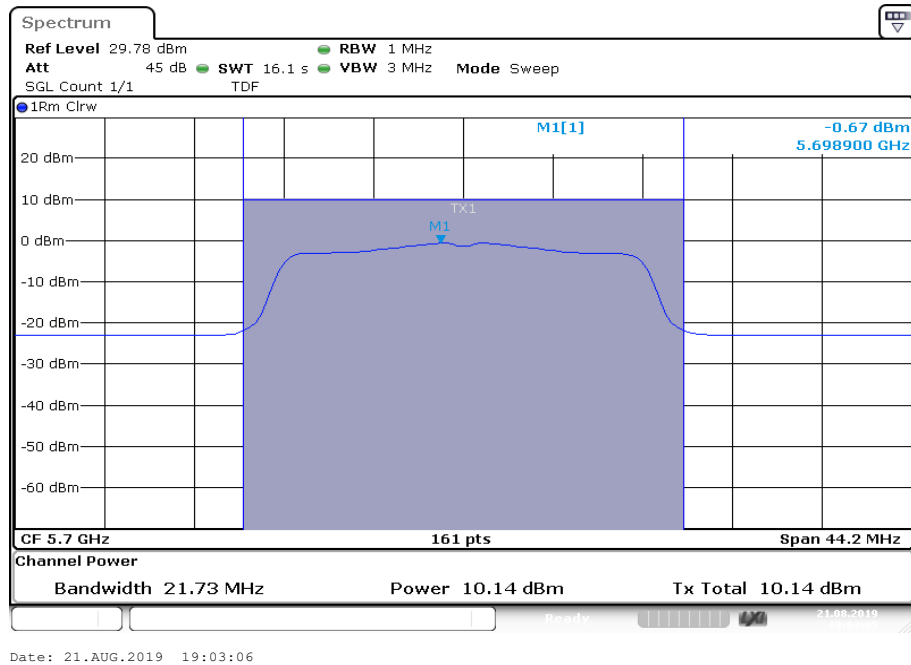
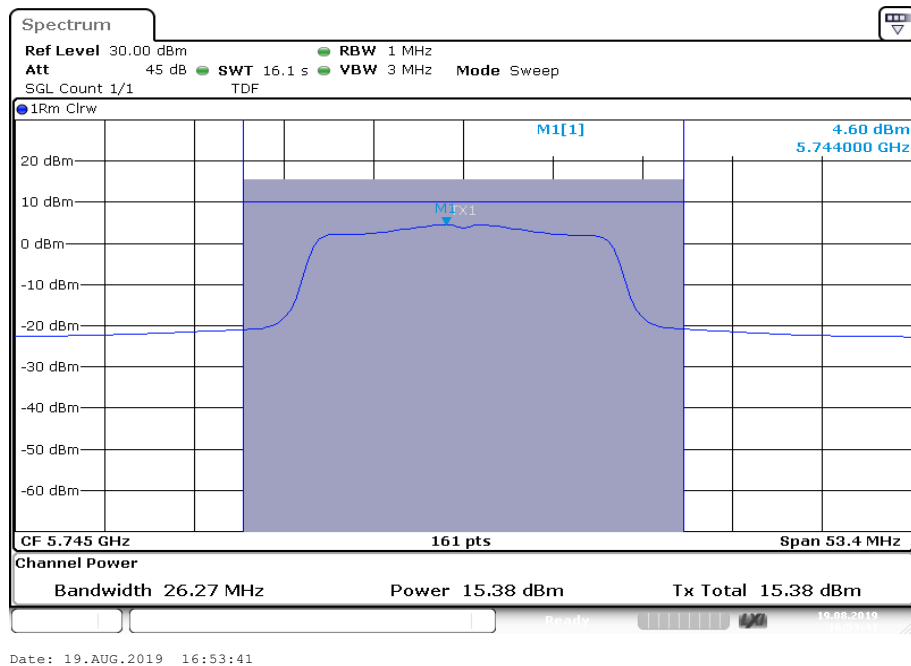
Plot 2: U-NII-1; middle channel

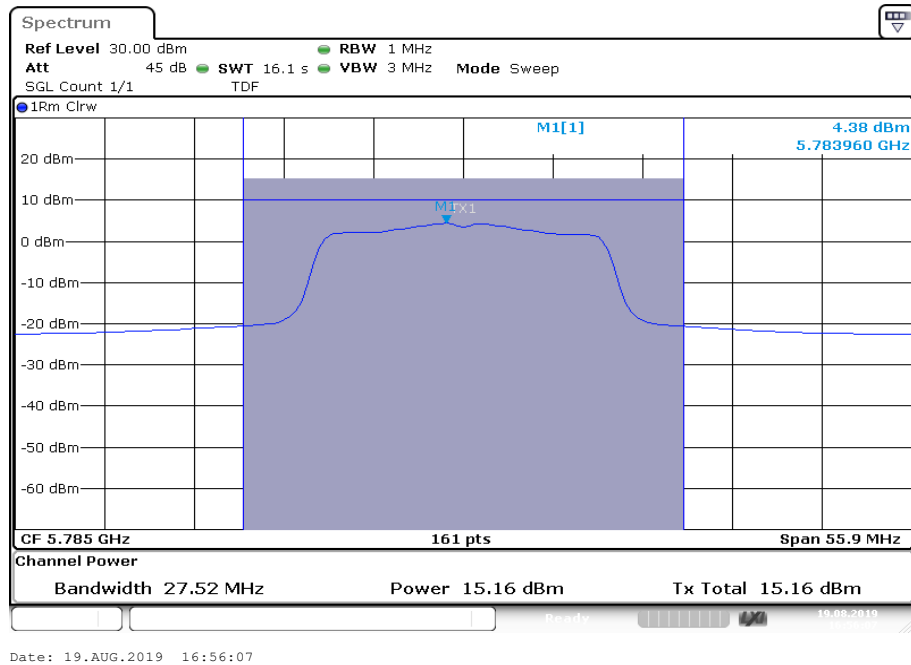
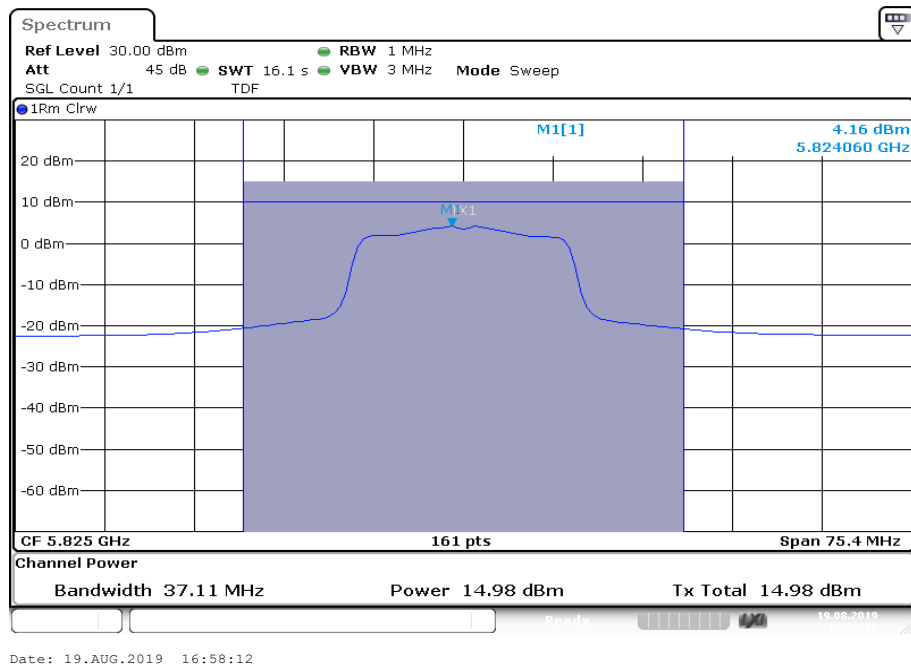


Plot 3: U-NII-1; highest channel**Plot 4:** U-NII-2A; lowest channel

Plot 5: U-NII-2A; middle channel**Plot 6:** U-NII-2A; highest channel

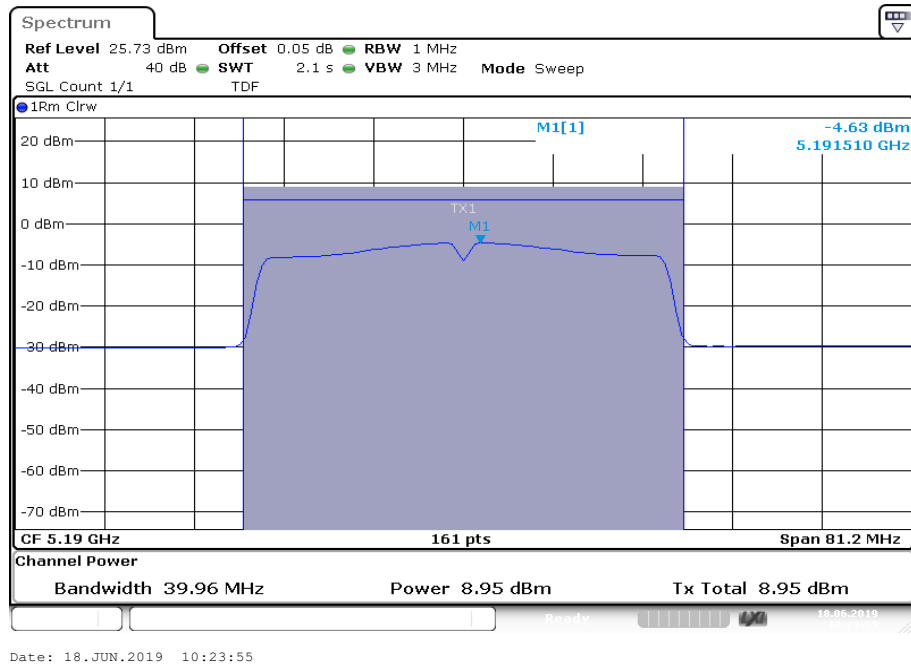
Plot 7: U-NII-2C; lowest channel**Plot 8:** U-NII-2C; middle channel

Plot 9: U-NII-2C; highest channel**Plot 10:** U-NII-3; lowest channel

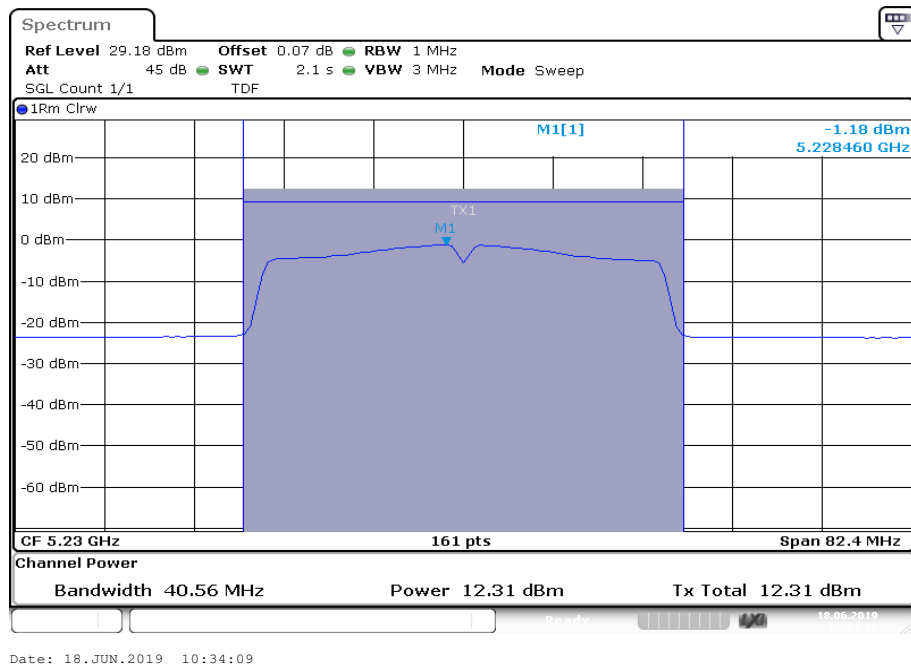
Plot 11: U-NII-3; middle channel**Plot 12:** U-NII-3; highest channel

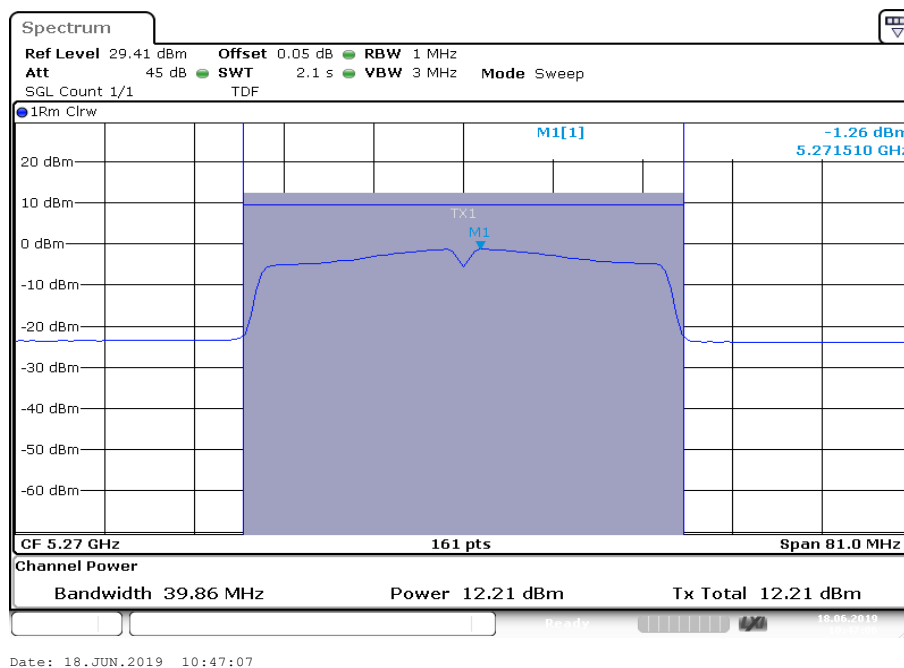
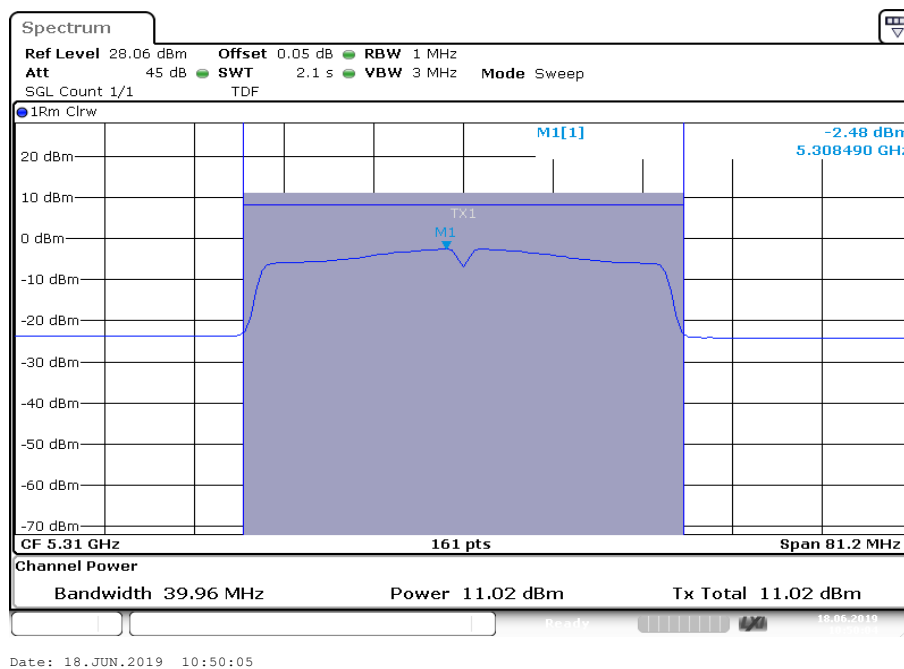
Plots: n/ac HT40 – mode, Antenna port 2

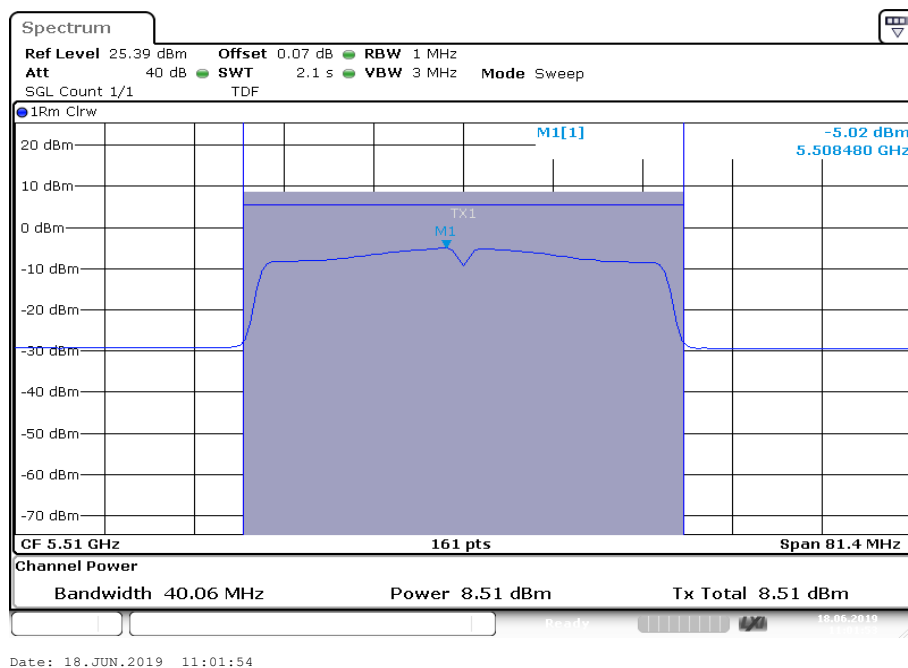
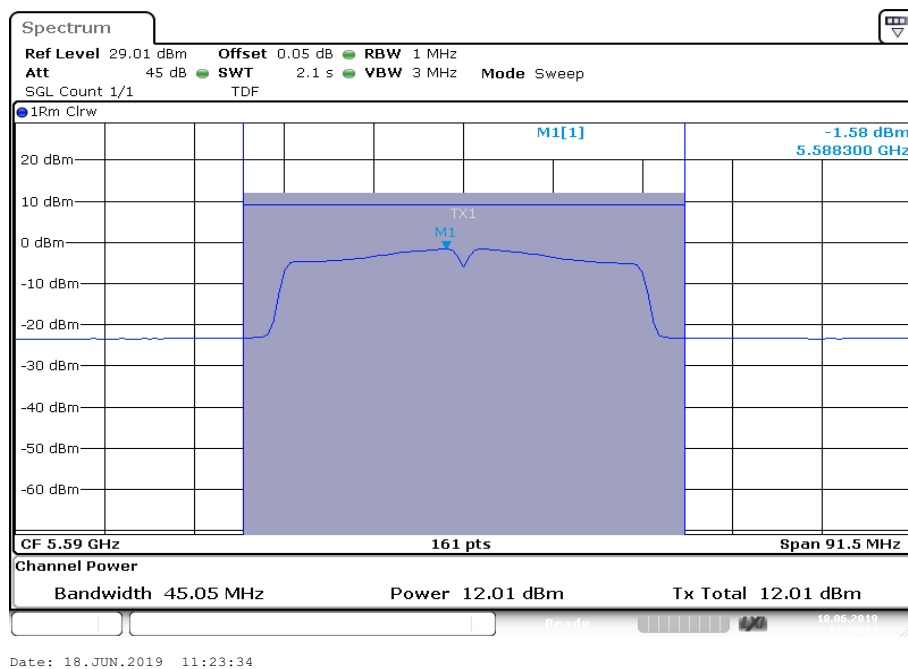
Plot 1: U-NII-1; lowest channel

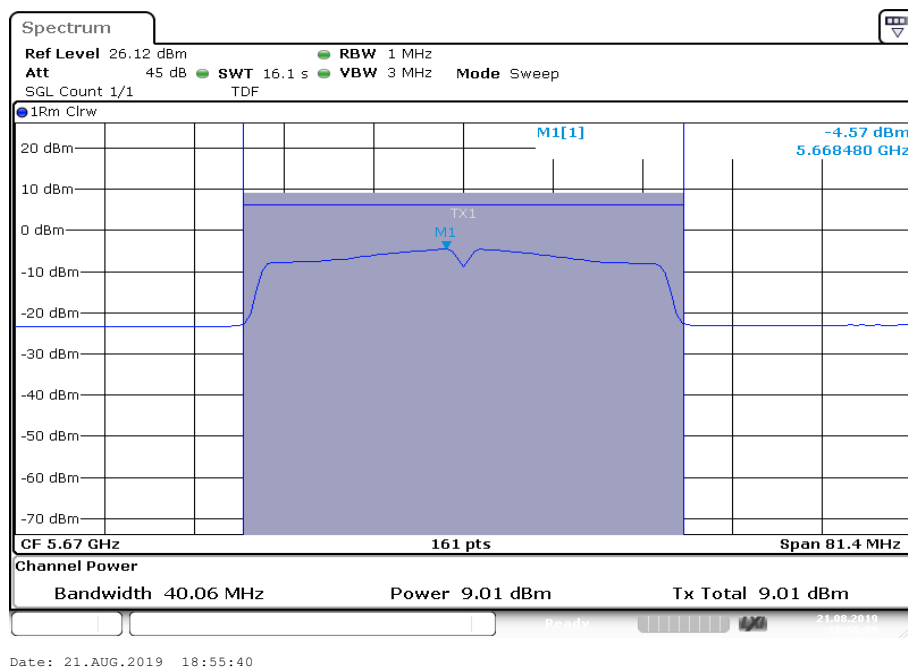
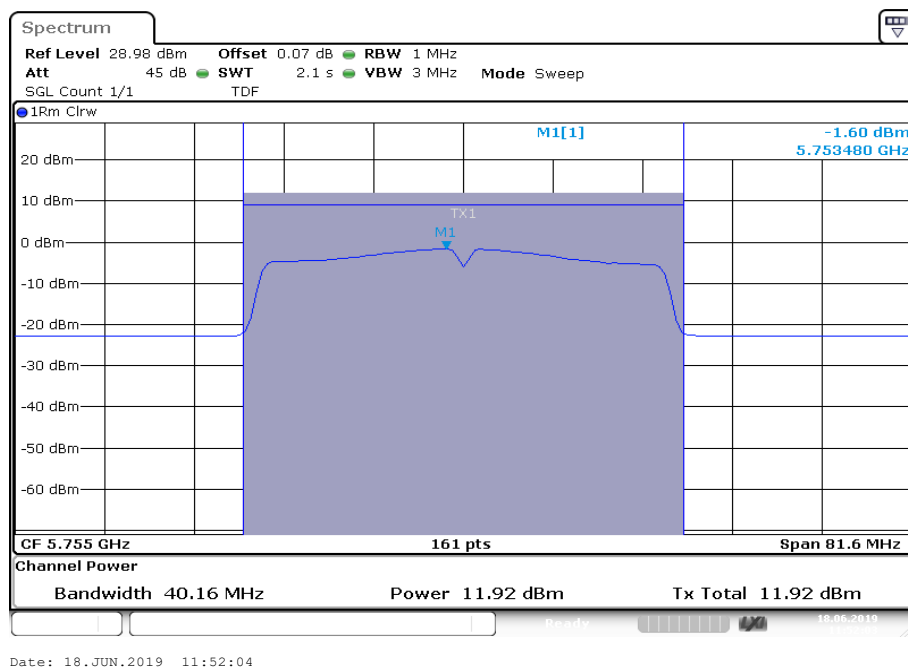


Plot 2: U-NII-1; highest channel

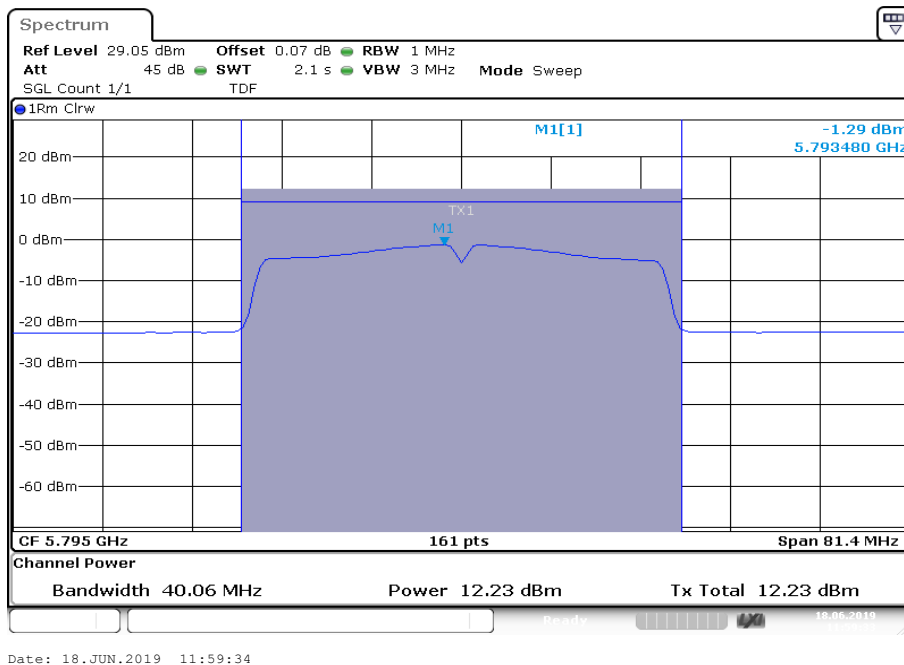


Plot 3: U-NII-2A; lowest channel**Plot 4:** U-NII-2A; highest channel

Plot 5: U-NII-2C; lowest channel**Plot 6:** U-NII-2C; middle channel

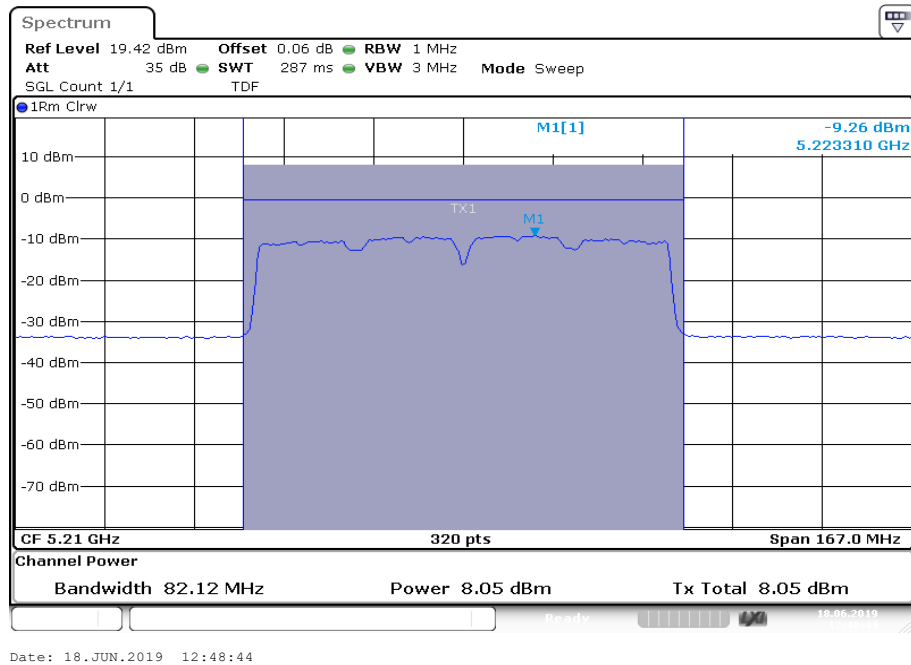
Plot 7: U-NII-2C; highest channel**Plot 8:** U-NII-3; lowest channel

Plot 9: U-NII-3; highest channel

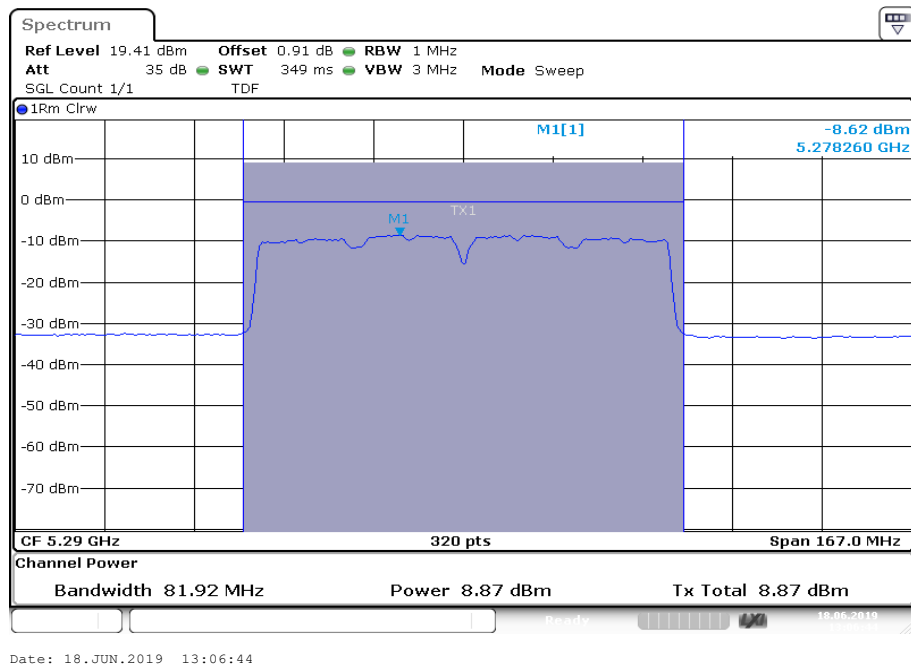


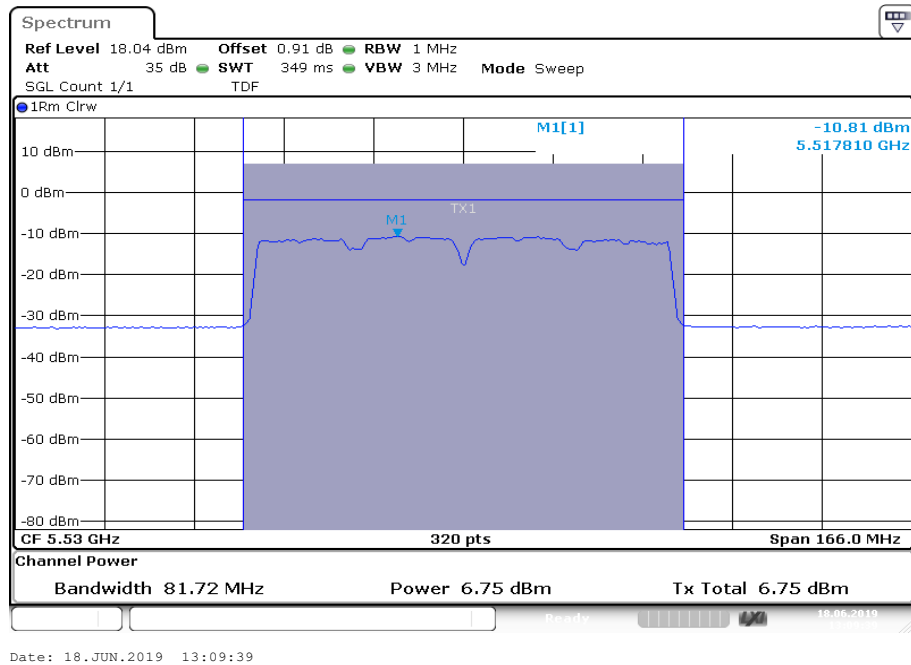
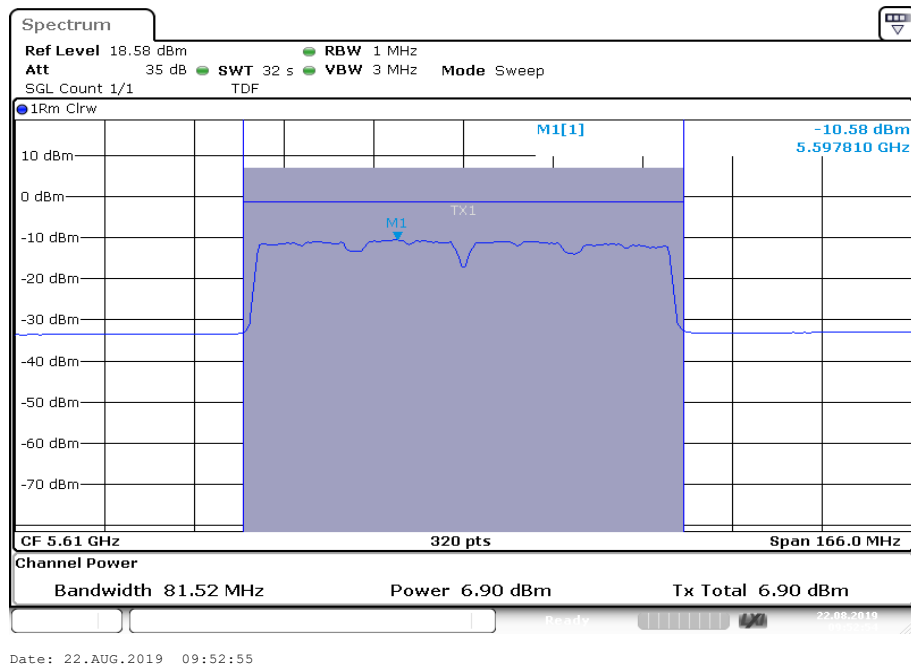
Plots: ac80– mode, Antenna port 2

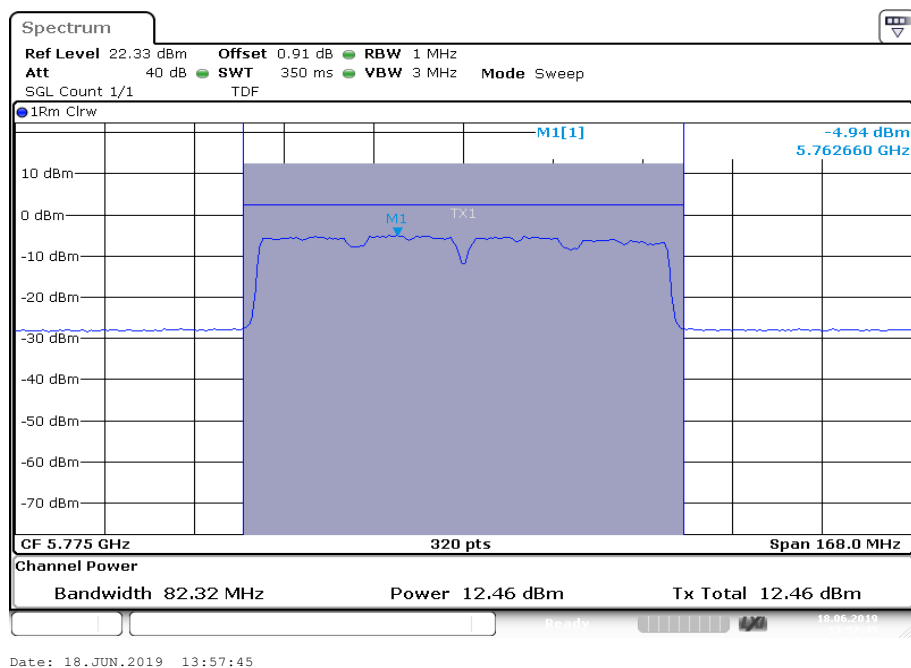
Plot 1: U-NII-1; middle channel



Plot 2: U-NII-2A; middle channel



Plot 3: U-NII-2C; lowest channel**Plot 4:** U-NII-2C; highest channel

Plot 5: U-NII-3; middle channel

11.4.2 Maximum output power according to IC requirements

Description:

Measurement of the maximum output power conducted + radiated

Measurement:

| Measurement parameter | |
|--------------------------|--|
| Detector: | RMS |
| Sweep time: | $\geq 10 * (\text{swp points}) * (\text{total on/off time})$ |
| Resolution bandwidth: | 1 MHz |
| Video bandwidth: | ≥ 3 MHz |
| Span: | > EBW |
| Trace mode: | Max hold |
| Analyzer function | Band power / channel power Interval > 99% OBW |
| Used test setup: | See chapter 6.4 – A |
| Measurement uncertainty: | See chapter 8 |

Limits:

| Radiated output power | Conducted output power for mobile equipment |
|---|---|
| The lesser one of 200 mW or 10 dBm + 10 log Bandwidth 5.150-5.250 GHz 1 W or 17 dBm + 10 log Bandwidth 5.250-5.350 GHz 1 W or 17 dBm + 10 log Bandwidth 5.470-5.725 GHz (where Bandwidth is the 99% Bandwidth [MHz]) Conducted power + 6dBi antenna gain 5.725-5.825 GHz | The lesser one of 250mW or 11 dBm + 10 log Bandwidth 5.250-5.350 GHz 250mW or 11 dBm + 10 log Bandwidth 5.470-5.725 GHz (where Bandwidth is the 99% Bandwidth [MHz]) 1W 5.725-5.825 GHz |

Results: Antenna port 1

| | | | |
|----------|--|----------------|-----------------|
| a | Maximum output power [dBm] | | |
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 10.1 | 11.9 | 12.6 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 9.2 | 11.1 | 11.8 |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 12.5 | 11.0 | 9.0 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 10.2 | 8.7 | 4.9 |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 9.2 | 10.9 | 10.6 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 6.7 | 9.0 | 5.0 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 13.6 | 14.1 | 13.7 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 7.8 | 10.9 | 9.4 |

Results: Antenna port 1

| | | | |
|------------------|--|----------------|-----------------|
| n/ac HT20 | Maximum output power [dBm] | | |
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 10.4 | 10.4 | 10.6 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 9.5 | 9.6 | 9.8 |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 10.5 | 10.5 | 10.1 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 8.2 | 8.2 | 6.0 |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 11.1 | 13.3 | 11.1 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 8.6 | 10.4 | 5.5 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 16.5 | 16.5 | 16.0 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 10.7 | 13.3 | 11.7 |

Results: Antenna port 1

| | | | |
|------------------|--|----------------|-----------------|
| n/ac HT40 | Maximum output power [dBm] | | |
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Lowest channel | | Highest channel |
| | Conducted | | |
| | 6.7 | | 9.4 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 5.8 | | 8.6 |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Lowest channel | | Highest channel |
| | Conducted | | |
| | 9.0 | | 7.7 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 6.7 | | 3.6 |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 6.5 | 10.0 | 9.9 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 4.0 | 7.1 | 4.3 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Lowest channel | | Highest channel |
| | Conducted | | |
| | 13.2 | | 13.5 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 7.4 | | 9.2 |

Results: Antenna port 1

| | | |
|-------------|--|-----------------|
| ac80 | Maximum output power [dBm] | |
| | U-NII-1 (5150 MHz to 5250 MHz) | |
| | Middle channel | |
| | Conducted | |
| | 7.5 | |
| | Radiated (calculated – see chapter antenna gain) | |
| | 6.7 | |
| | U-NII-2A (5250 MHz to 5350 MHz) | |
| | Middle channel | |
| | Conducted | |
| | 7.5 | |
| | Radiated (calculated – see chapter antenna gain) | |
| | 5.2 | |
| | U-NII-2C (5470 MHz to 5725 MHz) | |
| | Lowest channel | Highest channel |
| | Conducted | |
| | 7.9 | 8.1 |
| | Radiated (calculated – see chapter antenna gain) | |
| | 5.4 | 5.2 |
| | U-NII-3 (5725 MHz to 5850 MHz) | |
| | Middle channel | |
| | Conducted | |
| | 13.3 | |
| | Radiated (calculated – see chapter antenna gain) | |
| | 10.1 | |

Results: Antenna port 2

| | | | |
|------------------|--|----------------|-----------------|
| n/ac HT20 | Maximum output power [dBm] | | |
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 11.4 | 13.2 | 13.4 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 9.2 | 11.2 | 11.4 |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 13.5 | 13.5 | 11.6 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 10.7 | 10.7 | 7.8 |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 10.1 | 12.4 | 10.1 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 6.2 | 11.8 | 9.8 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 15.3 | 15.1 | 14.9 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 14.2 | 14.6 | 15.0 |

Results: Antenna port 2

| | | | |
|------------------|--|----------------|-----------------|
| n/ac HT40 | Maximum output power [dBm] | | |
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Lowest channel | | Highest channel |
| | Conducted | | |
| | 8.9 | | 12.2 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 6.7 | | 10.2 |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Lowest channel | | Highest channel |
| | Conducted | | |
| | 12.2 | | 11.0 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 9.4 | | 7.2 |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 8.5 | 11.9 | 9.0 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 4.6 | 11.3 | 8.7 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Lowest channel | | Highest channel |
| | Conducted | | |
| | 11.9 | | 12.2 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 10.8 | | 12.3 |

Results: Antenna port 2

| | | |
|-------------|--|-----------------|
| ac80 | Maximum output power [dBm] | |
| | U-NII-1 (5150 MHz to 5250 MHz) | |
| | Middle channel | |
| | Conducted | |
| | 8.0 | |
| | Radiated (calculated – see chapter antenna gain) | |
| | 6.0 | |
| | U-NII-2A (5250 MHz to 5350 MHz) | |
| | Middle channel | |
| | Conducted | |
| | 8.9 | |
| | Radiated (calculated – see chapter antenna gain) | |
| | 6.1 | |
| | U-NII-2C (5470 MHz to 5725 MHz) | |
| | Lowest channel | Highest channel |
| | Conducted | |
| | 6.7 | 6.9 |
| | Radiated (calculated – see chapter antenna gain) | |
| | 2.8 | 6.3 |
| | U-NII-3 (5725 MHz to 5850 MHz) | |
| | Middle channel | |
| | Conducted | |
| | 12.4 | |
| | Radiated (calculated – see chapter antenna gain) | |
| | 12.5 | |

Results: Antenna port 1+2 (calculated)

| | | | |
|------------------|--|----------------|-----------------|
| n/ac HT20 | Maximum output power [dBm] | | |
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 13.9 | 15.0 | 15.2 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 12.4 | 13.5 | 13.7 |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 15.3 | 15.3 | 13.9 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 12.6 | 12.6 | 10.0 |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 13.6 | 15.9 | 13.6 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 10.6 | 14.2 | 11.2 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 19.0 | 18.9 | 18.5 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 15.8 | 17.0 | 16.7 |

Results: Antenna port 1+2 (calculated)

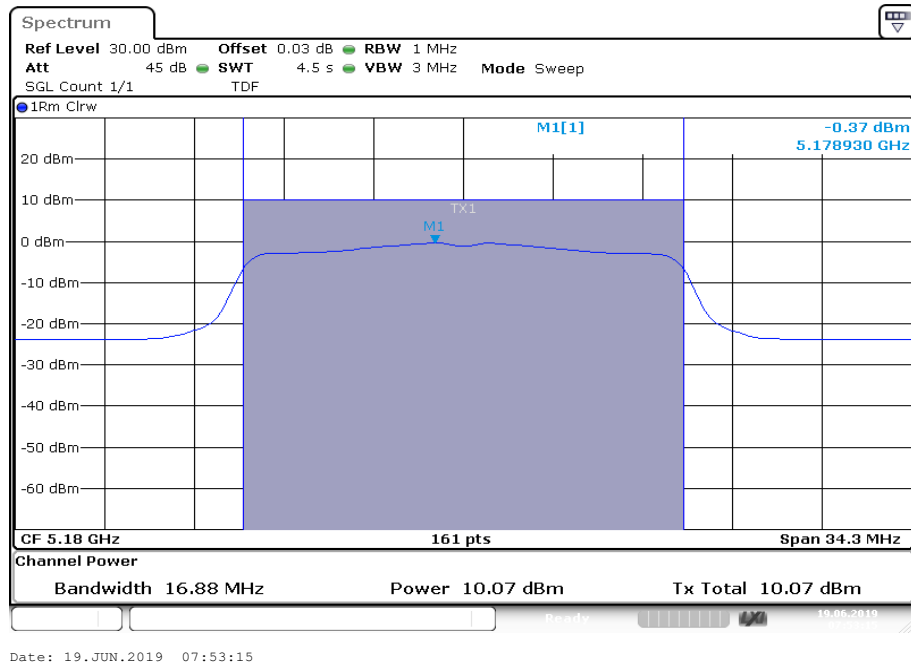
| | | | |
|------------------|--|----------------|-----------------|
| n/ac HT40 | Maximum output power [dBm] | | |
| | U-NII-1 (5150 MHz to 5250 MHz) | | |
| | Lowest channel | | Highest channel |
| | Conducted | | |
| | 11.0 | | 14.0 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 9.3 | | 12.5 |
| | U-NII-2A (5250 MHz to 5350 MHz) | | |
| | Lowest channel | | Highest channel |
| | Conducted | | |
| | 13.9 | | 12.7 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 11.3 | | 8.8 |
| | U-NII-2C (5470 MHz to 5725 MHz) | | |
| | Lowest channel | Middle channel | Highest channel |
| | Conducted | | |
| | 10.6 | 14.1 | 12.5 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 7.3 | 12.7 | 10.1 |
| | U-NII-3 (5725 MHz to 5850 MHz) | | |
| | Lowest channel | | Highest channel |
| | Conducted | | |
| | 15.6 | | 15.9 |
| | Radiated (calculated – see chapter antenna gain) | | |
| | 12.4 | | 14 |

Results: Antenna port 1+2 (calculated)

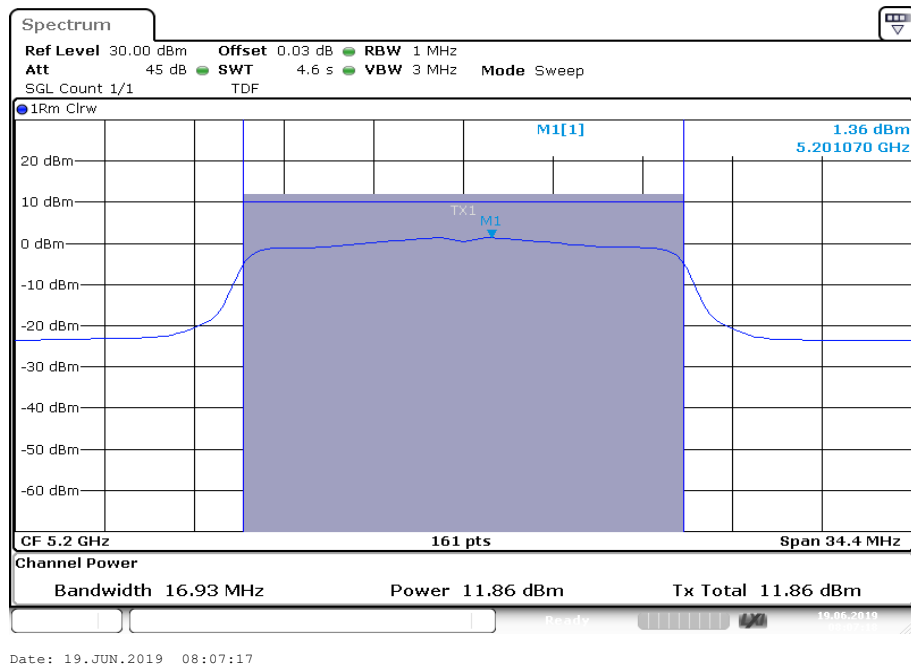
| | | |
|-------------|--|-----------------|
| ac80 | Maximum output power [dBm] | |
| | U-NII-1 (5150 MHz to 5250 MHz) | |
| | Middle channel | |
| | Conducted | |
| | 10.8 | |
| | Radiated (calculated – see chapter antenna gain) | |
| | 9.4 | |
| | U-NII-2A (5250 MHz to 5350 MHz) | |
| | Middle channel | |
| | Conducted | |
| | 11.3 | |
| | Radiated (calculated – see chapter antenna gain) | |
| | 8.7 | |
| | U-NII-2C (5470 MHz to 5725 MHz) | |
| | Lowest channel | Highest channel |
| | Conducted | |
| | 10.4 | 10.6 |
| | Radiated (calculated – see chapter antenna gain) | |
| | 7.3 | 8.8 |
| | U-NII-3 (5725 MHz to 5850 MHz) | |
| | Middle channel | |
| | Conducted | |
| | 15.9 | |
| | Radiated (calculated – see chapter antenna gain) | |
| | 14.5 | |

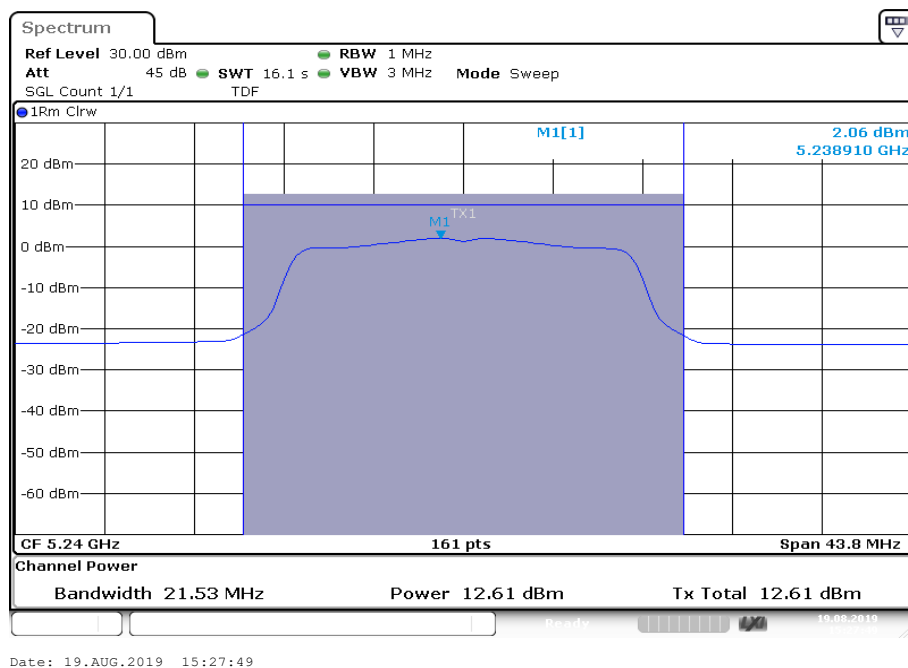
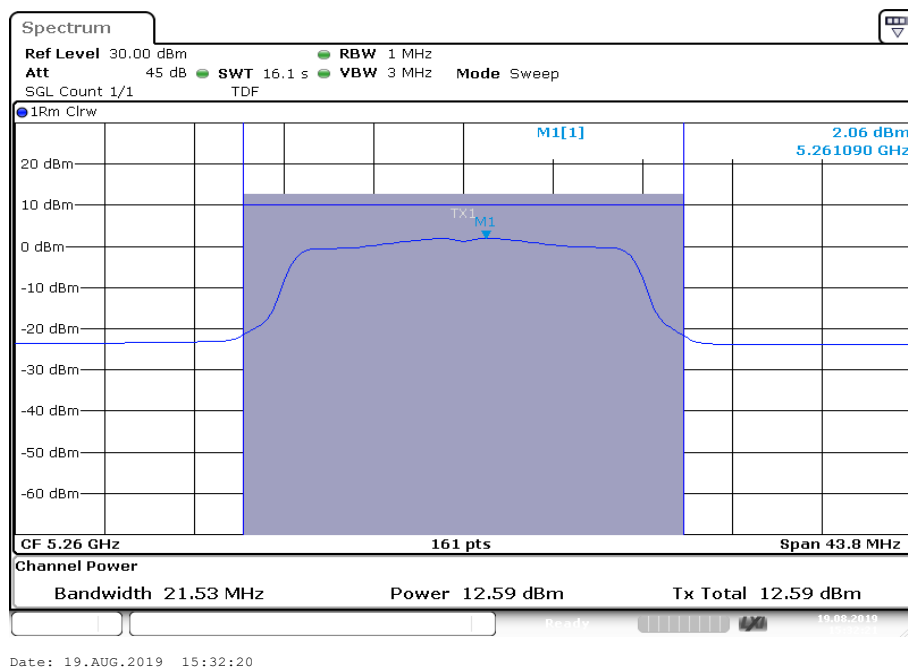
Plots: a – mode, Antenna port 1

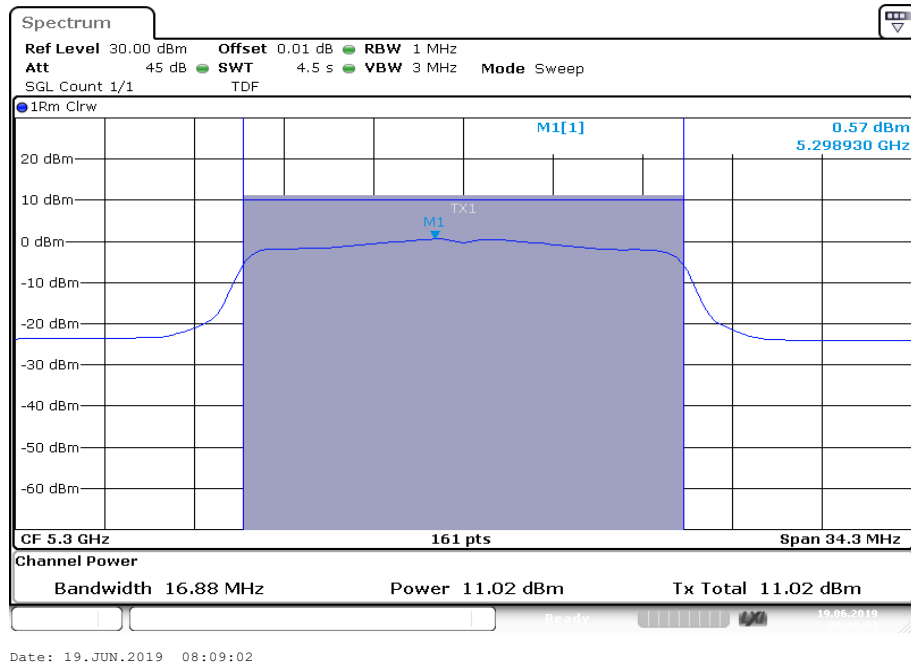
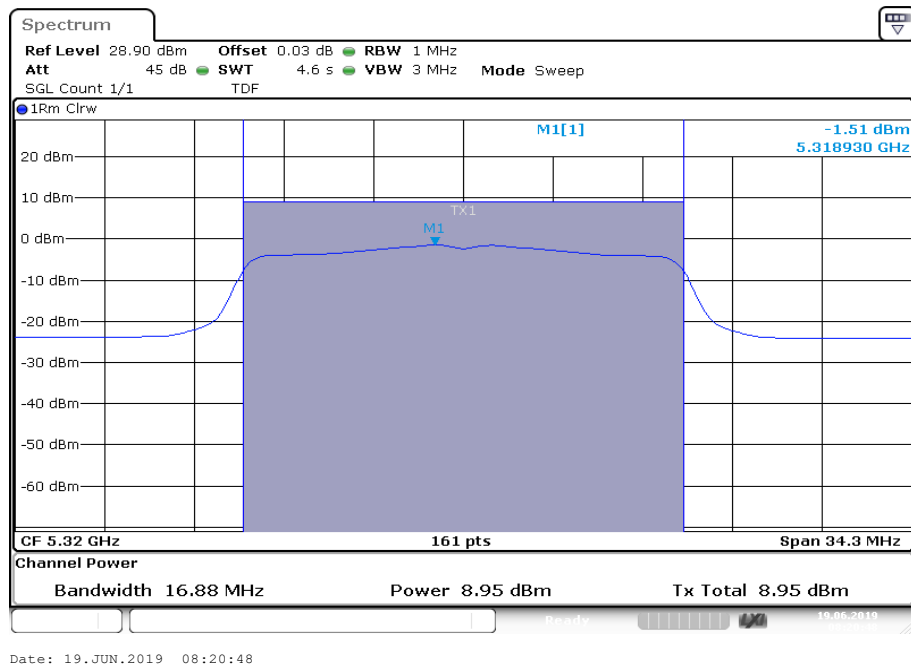
Plot 1: U-NII-1; lowest channel

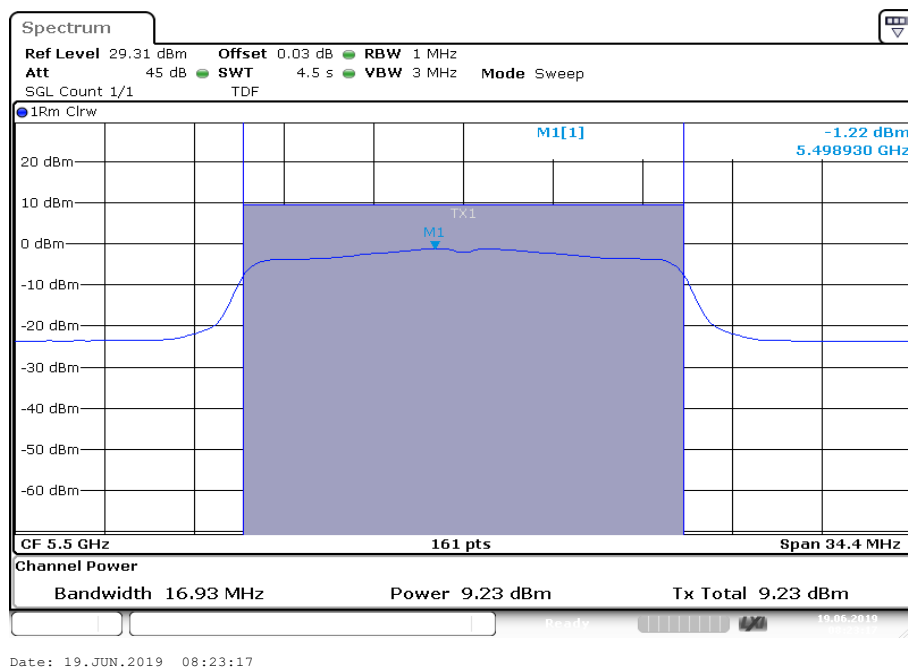
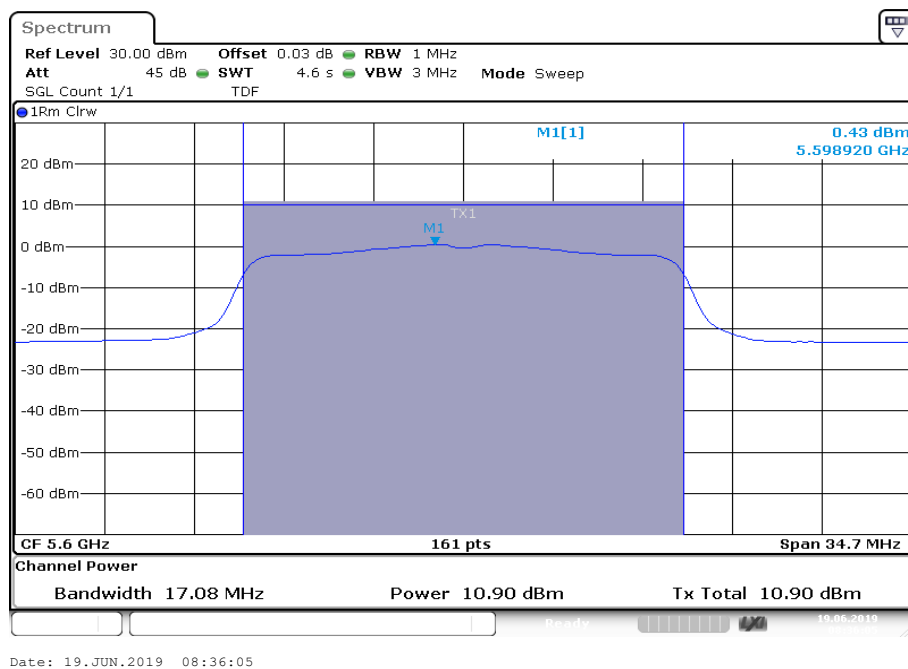


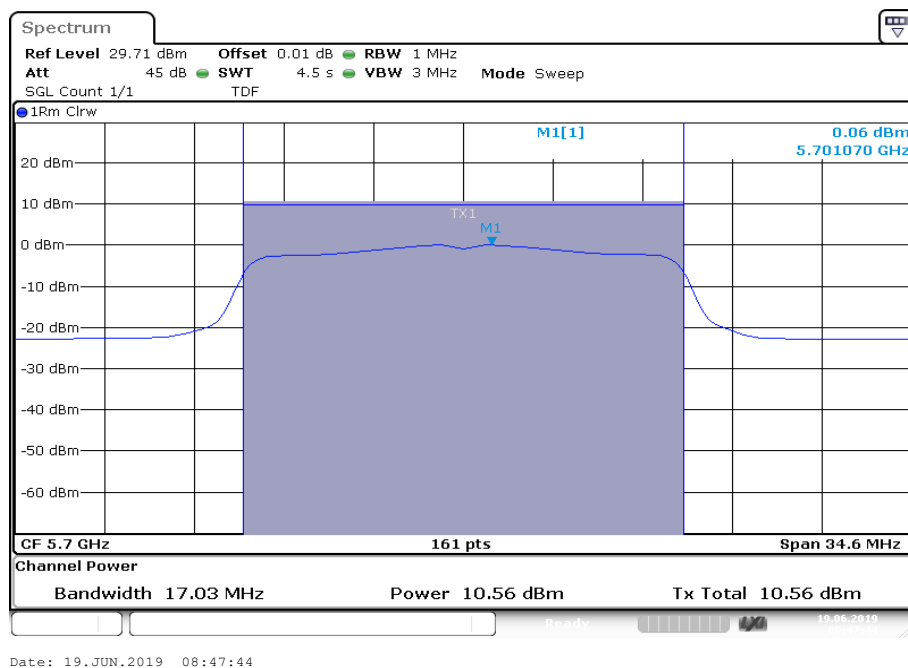
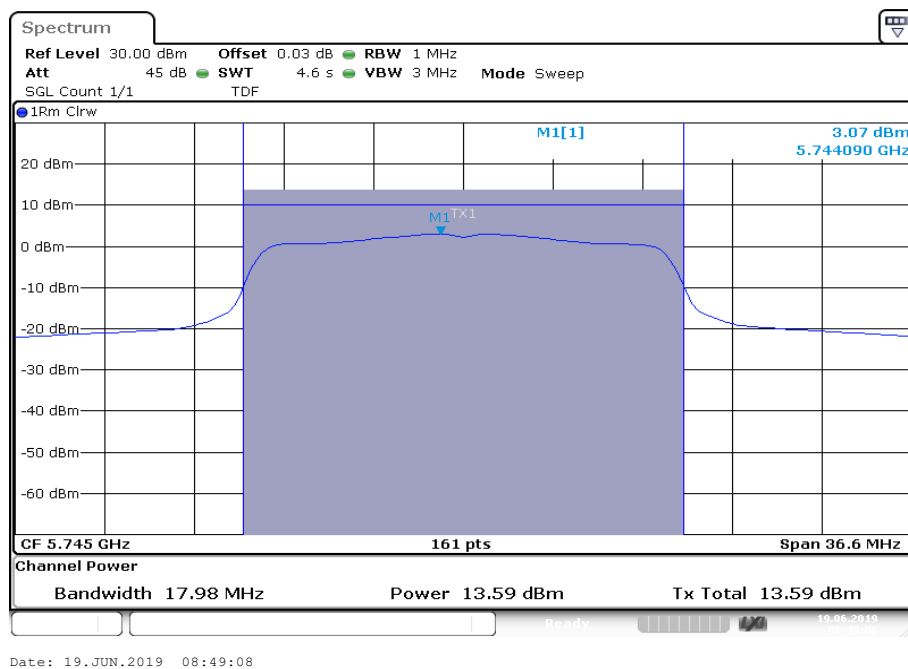
Plot 2: U-NII-1; middle channel

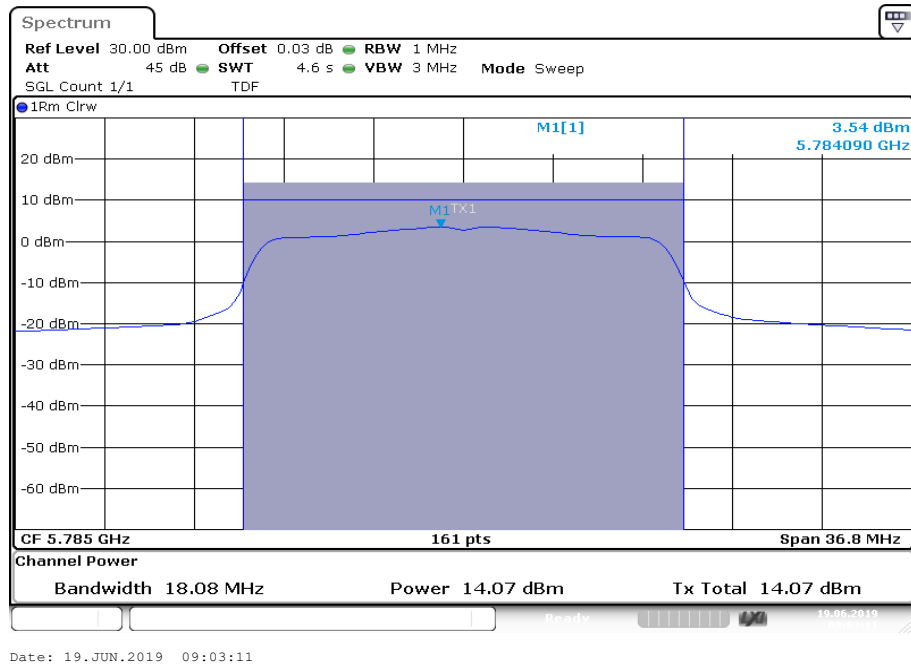
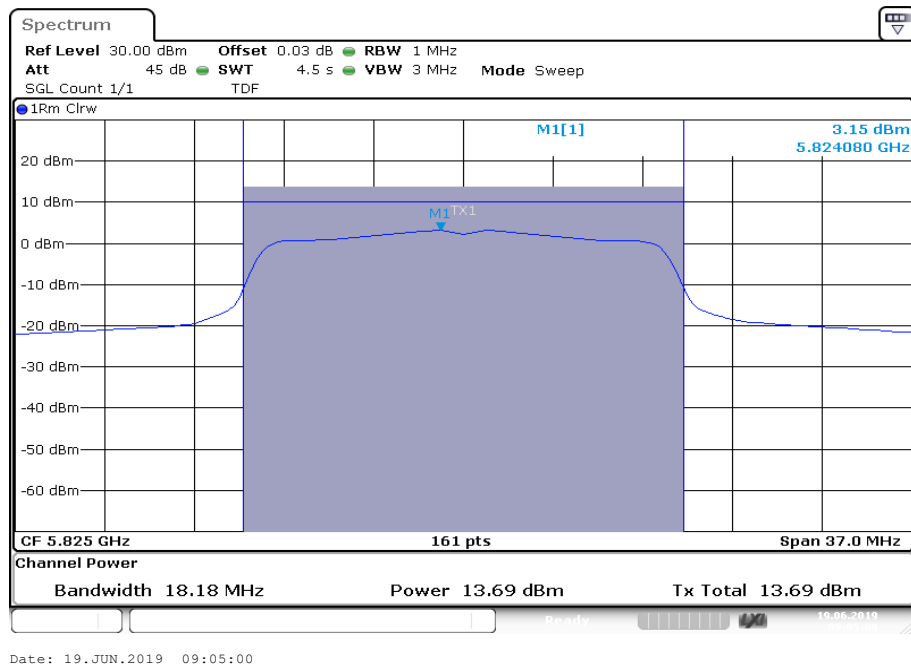


Plot 3: U-NII-1; highest channel**Plot 4:** U-NII-2A; lowest channel

Plot 5: U-NII-2A; middle channel**Plot 6:** U-NII-2A; highest channel

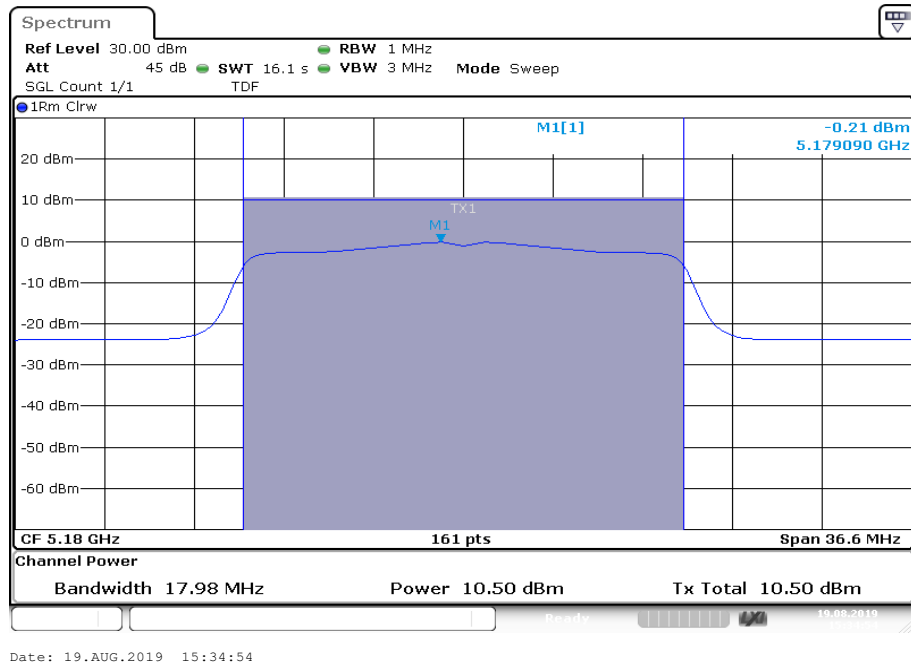
Plot 7: U-NII-2C; lowest channel**Plot 8:** U-NII-2C; middle channel

Plot 9: U-NII-2C; highest channel**Plot 10:** U-NII-3; lowest channel

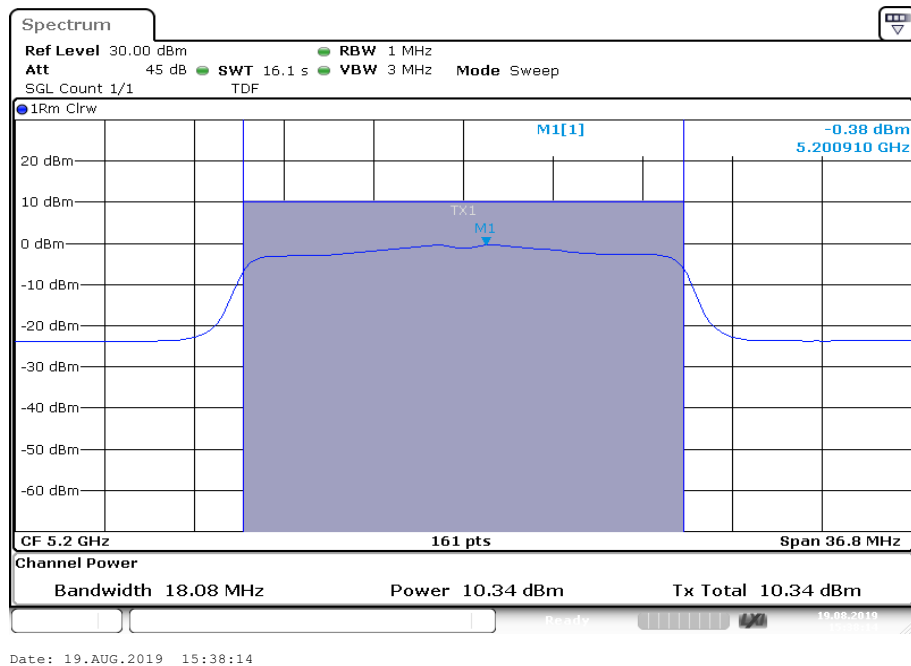
Plot 11: U-NII-3; middle channel**Plot 12:** U-NII-3; highest channel

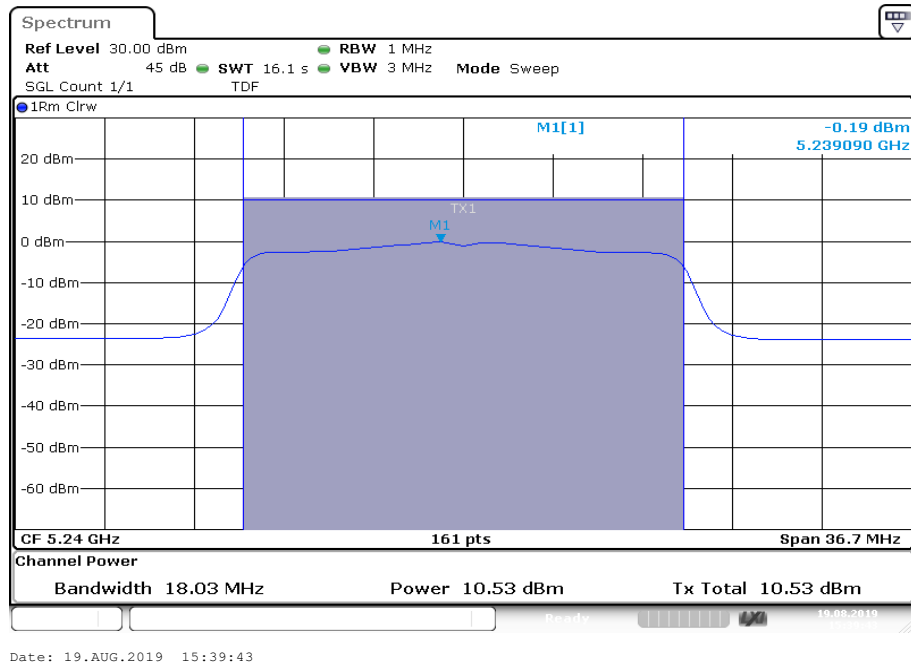
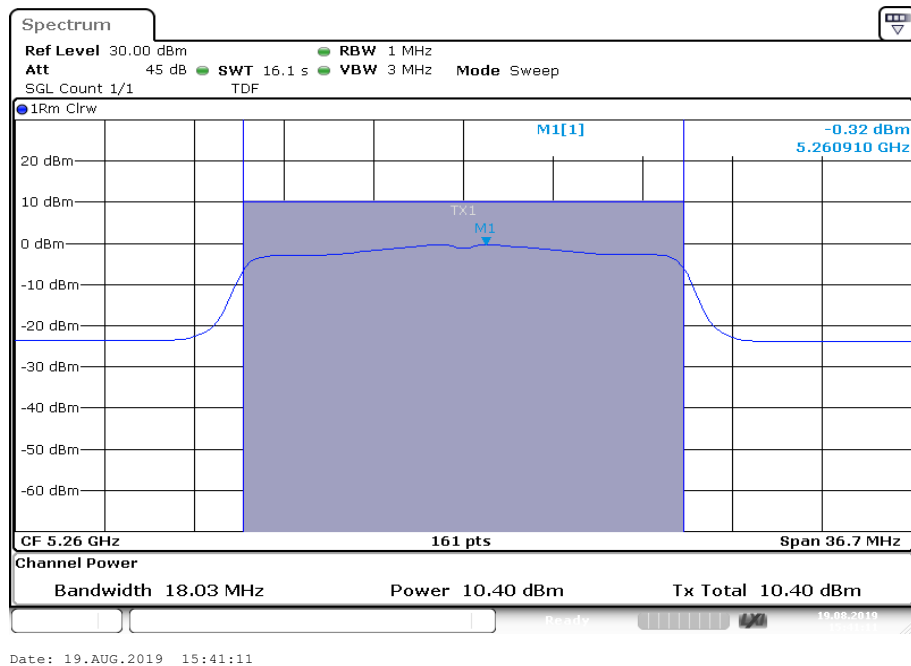
Plots: n/ac HT20 – mode, Antenna port 1

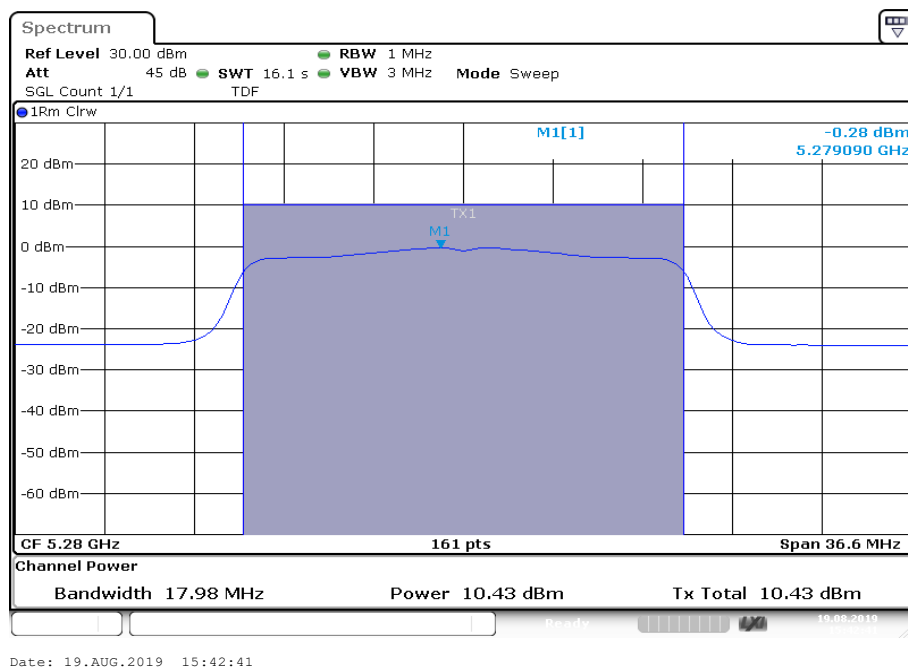
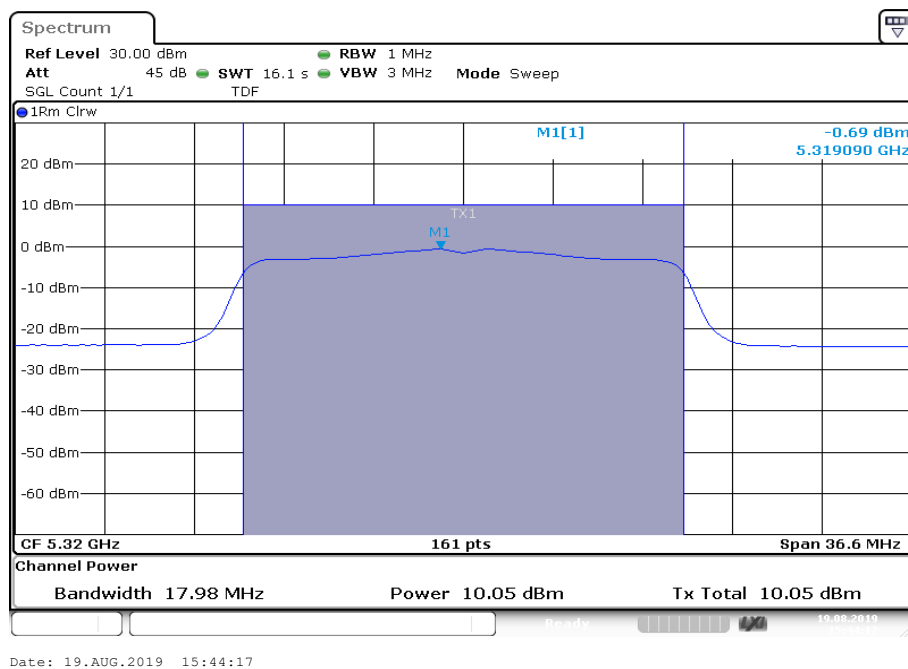
Plot 1: U-NII-1; lowest channel

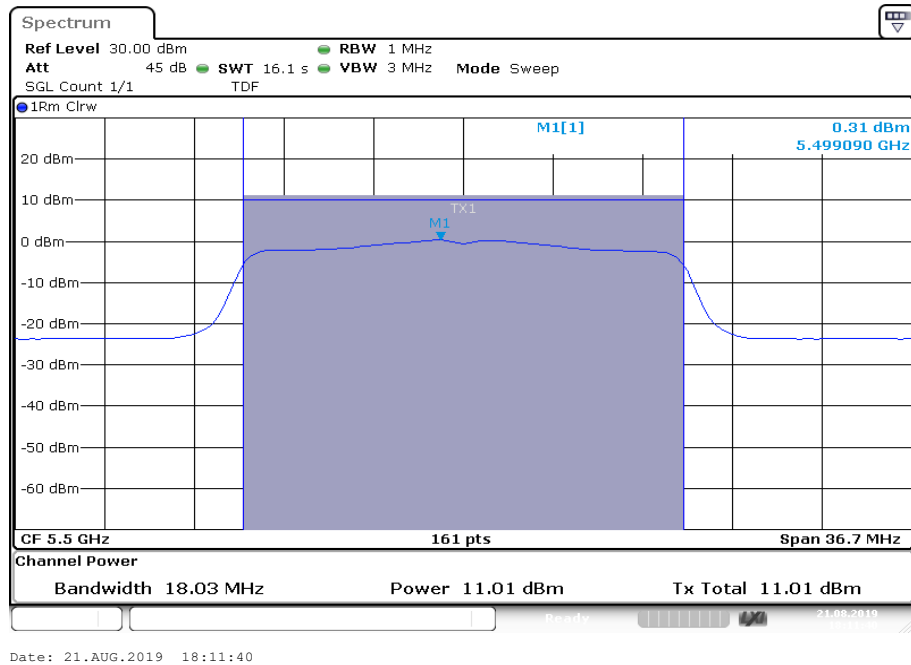
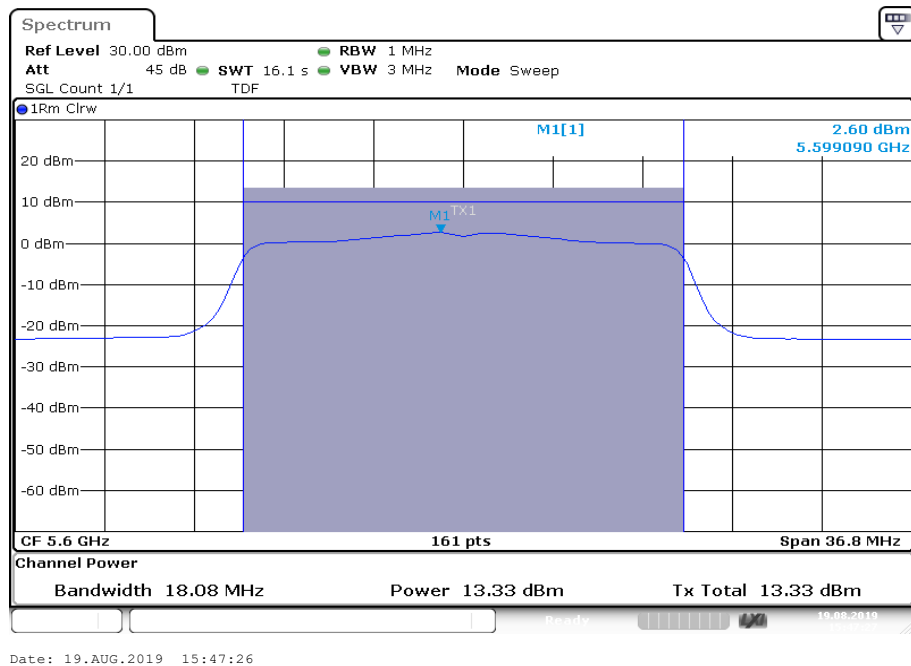


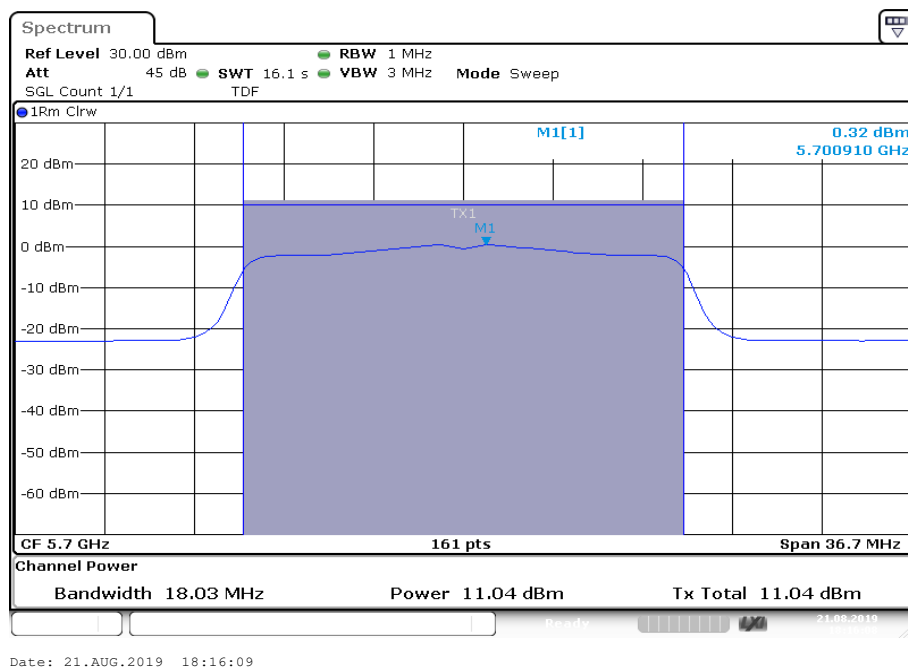
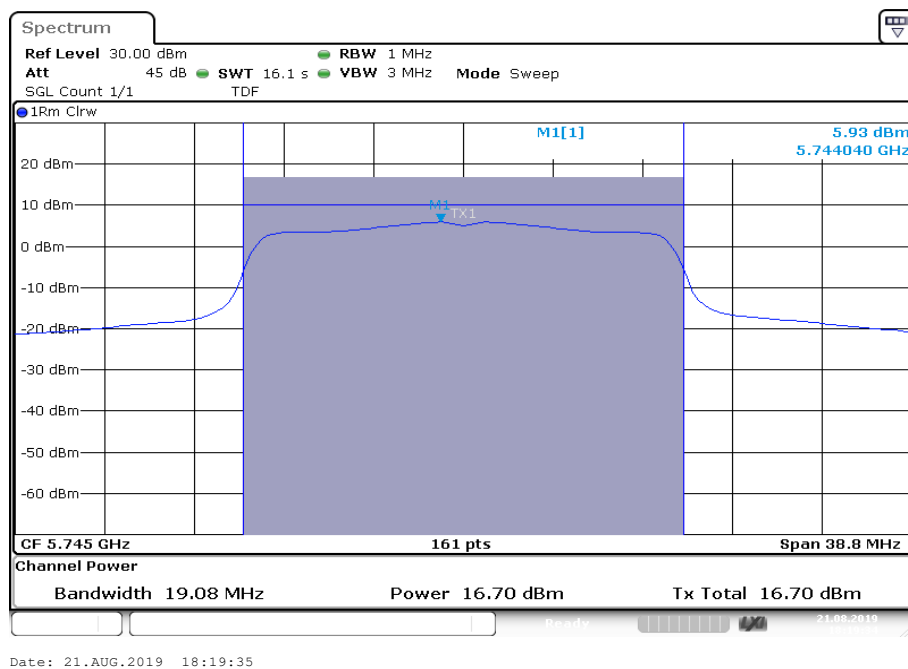
Plot 2: U-NII-1; middle channel

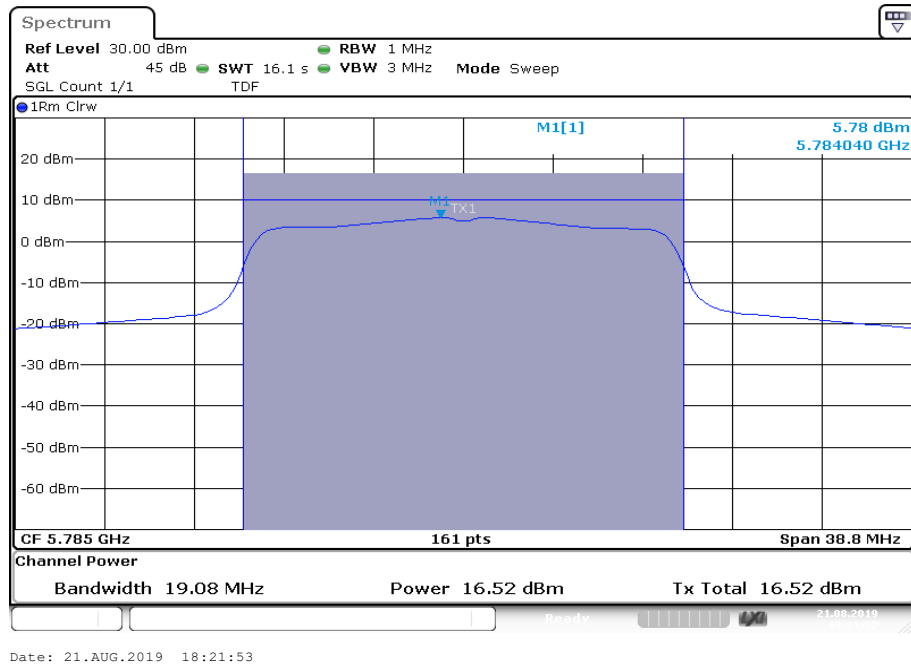
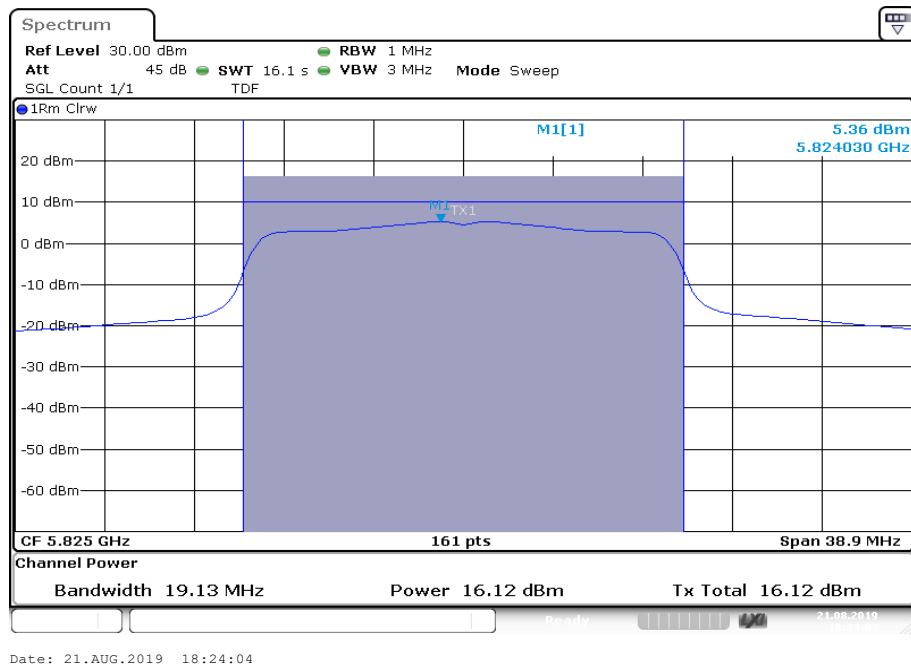


Plot 3: U-NII-1; highest channel**Plot 4:** U-NII-2A; lowest channel

Plot 5: U-NII-2A; middle channel**Plot 6:** U-NII-2A; highest channel

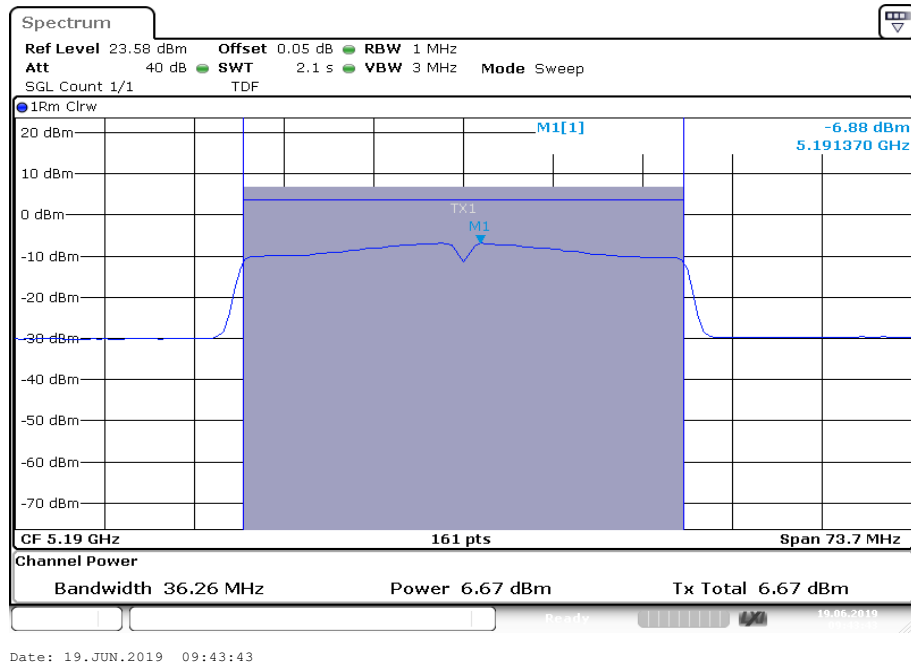
Plot 7: U-NII-2C; lowest channel**Plot 8:** U-NII-2C; middle channel

Plot 9: U-NII-2C; highest channel**Plot 10:** U-NII-3; lowest channel

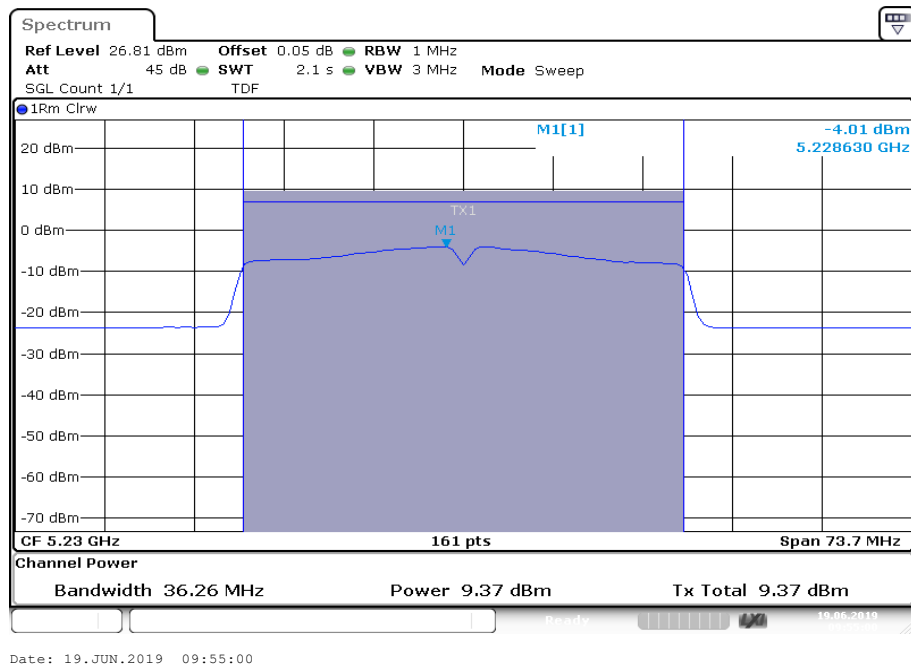
Plot 11: U-NII-3; middle channel**Plot 12:** U-NII-3; highest channel

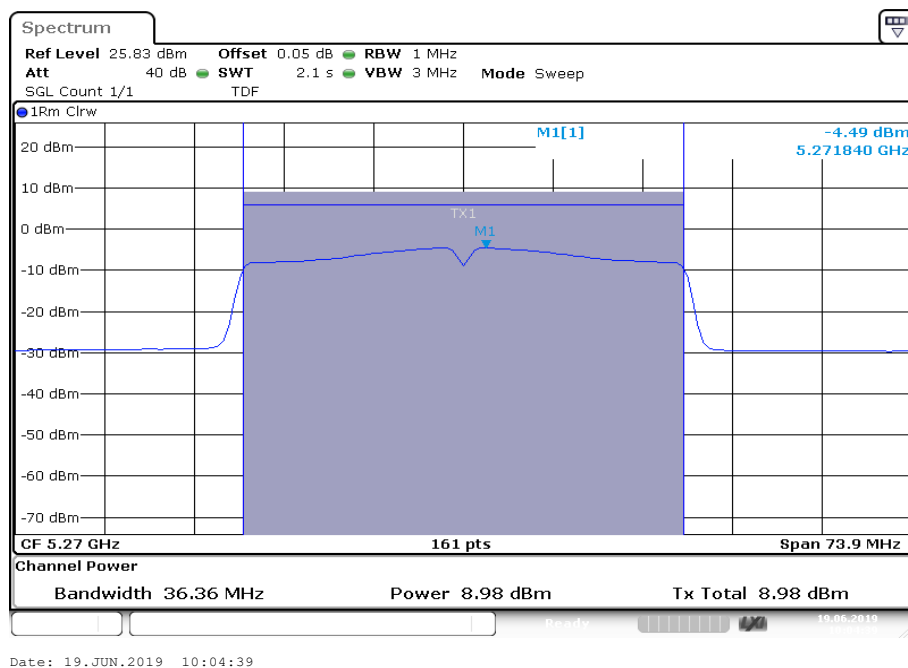
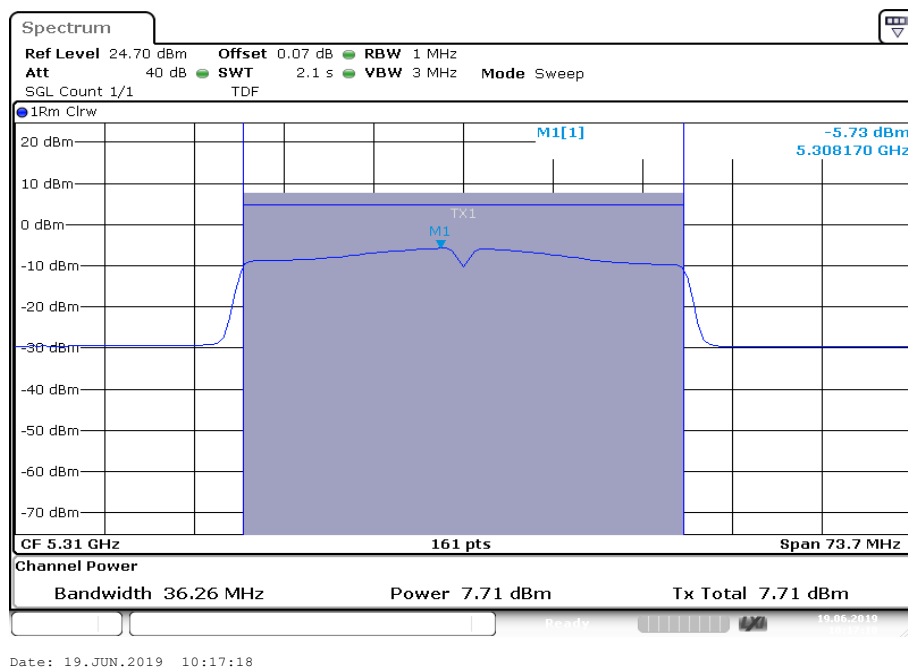
Plots: n/ac HT40 – mode, Antenna port 1

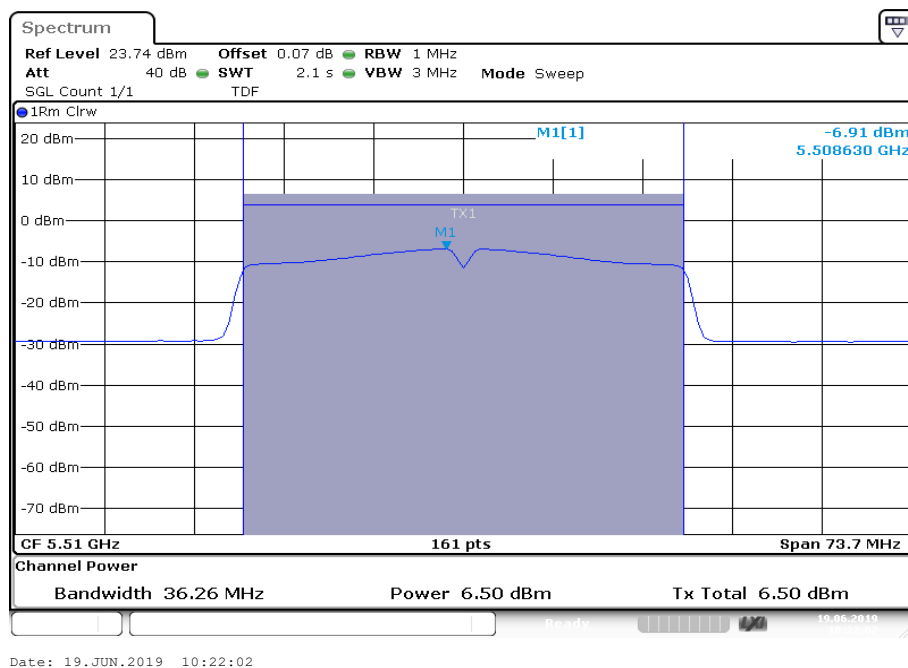
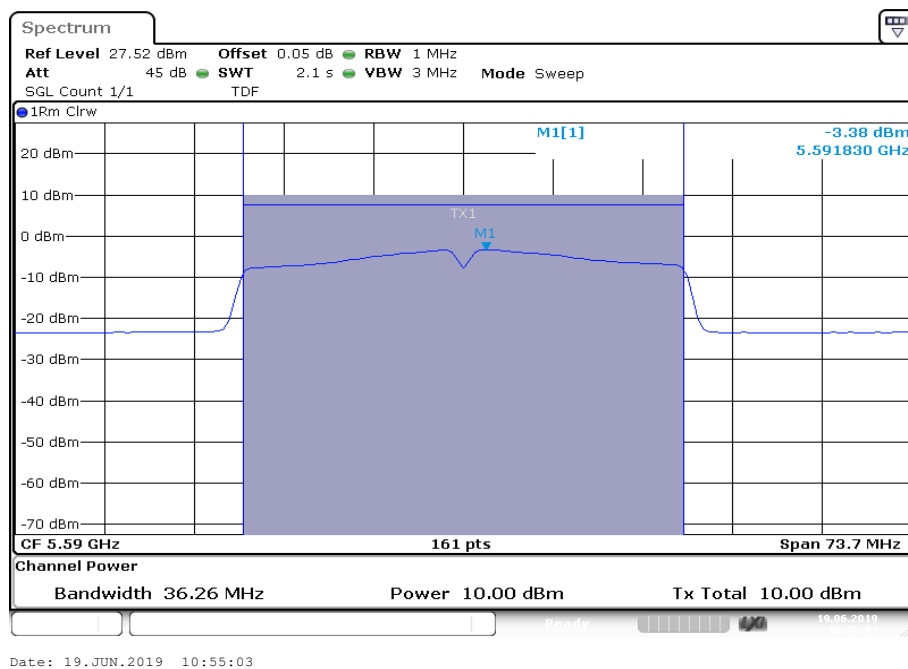
Plot 1: U-NII-1; lowest channel

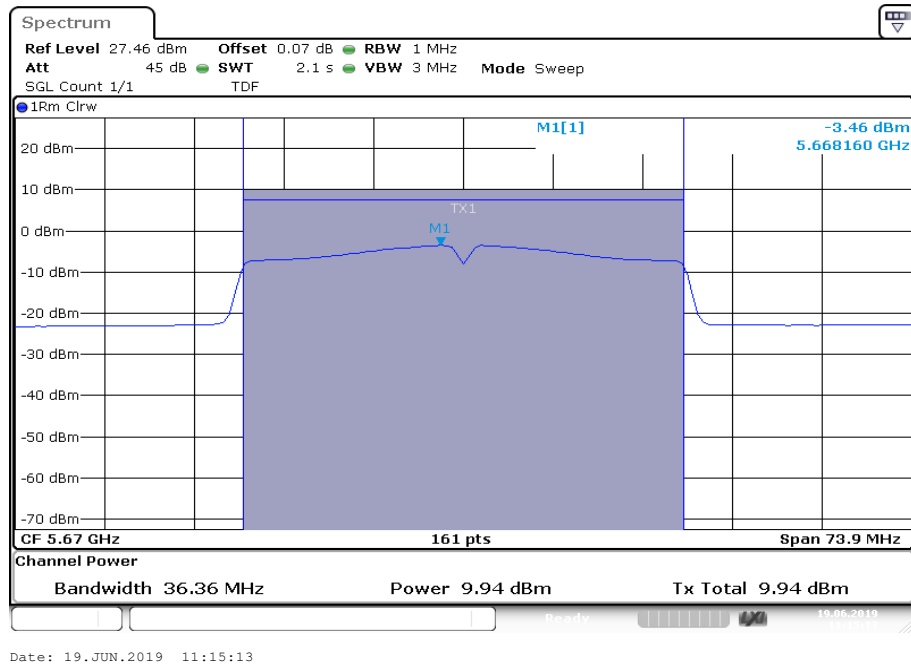
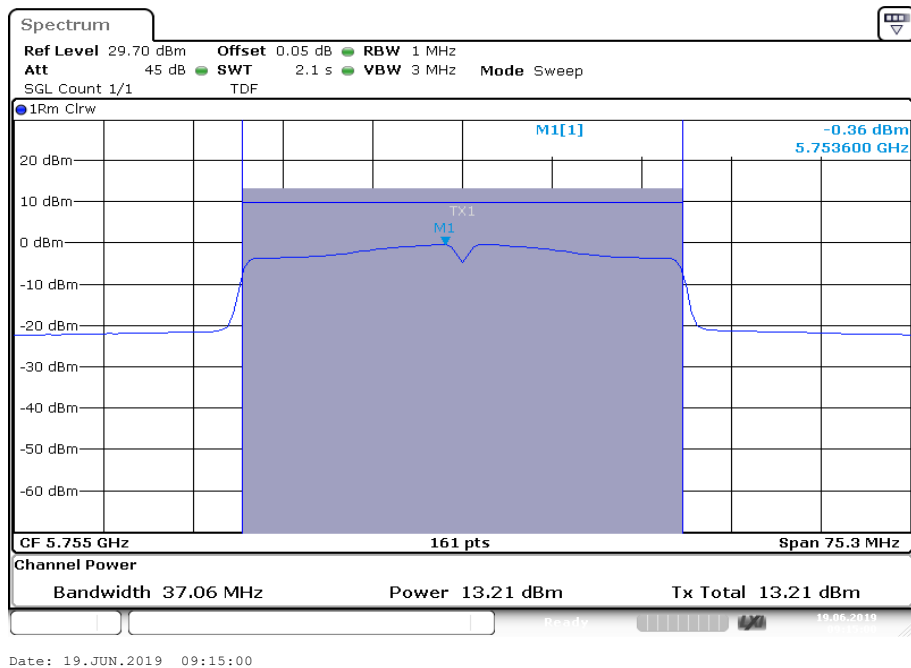


Plot 2: U-NII-1; highest channel

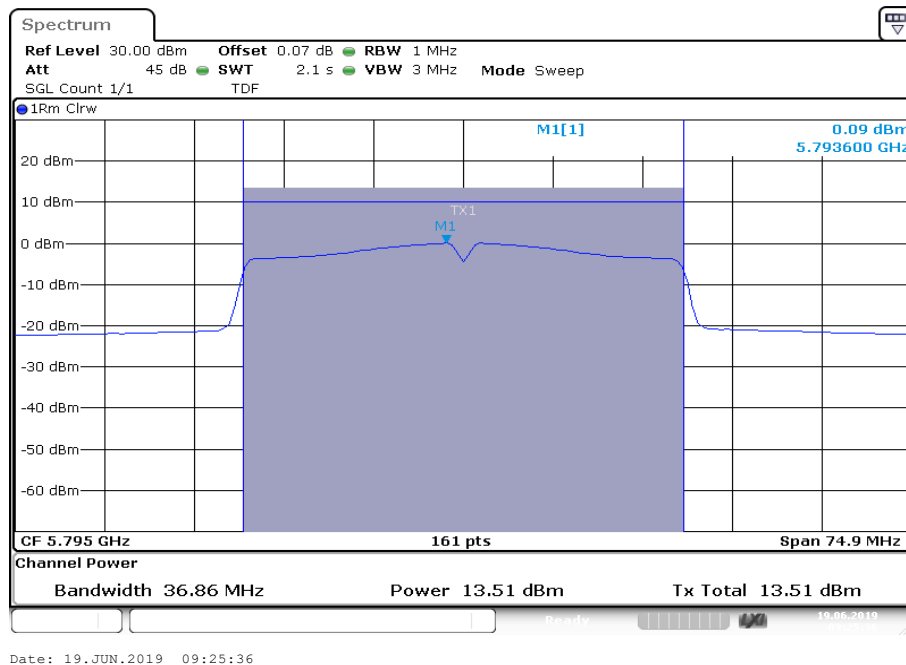


Plot 3: U-NII-2A; lowest channel**Plot 4:** U-NII-2A; highest channel

Plot 5: U-NII-2C; lowest channel**Plot 6:** U-NII-2C; middle channel

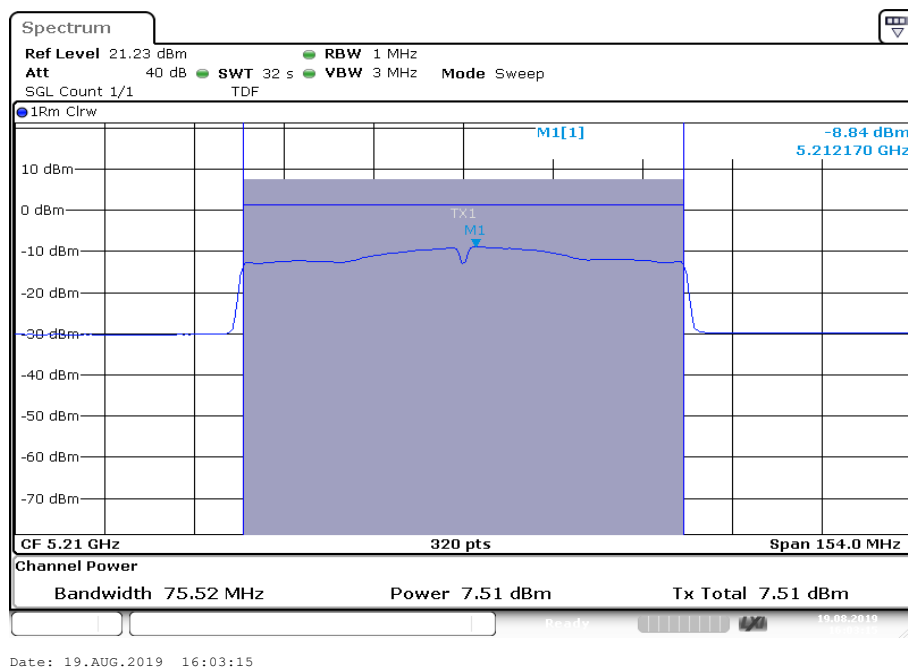
Plot 7: U-NII-2C; highest channel**Plot 8:** U-NII-3; lowest channel

Plot 9: U-NII-3; highest channel

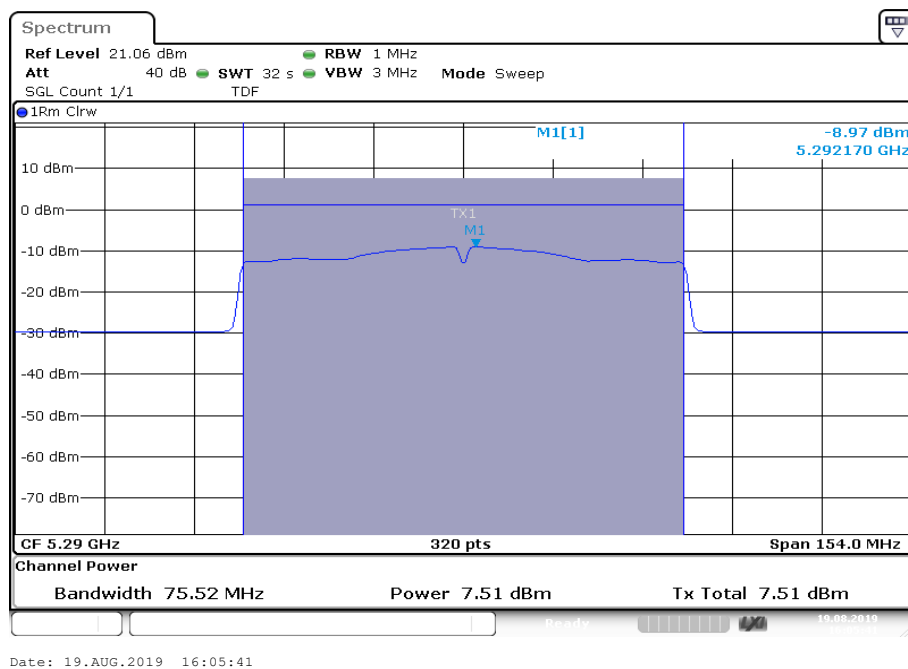


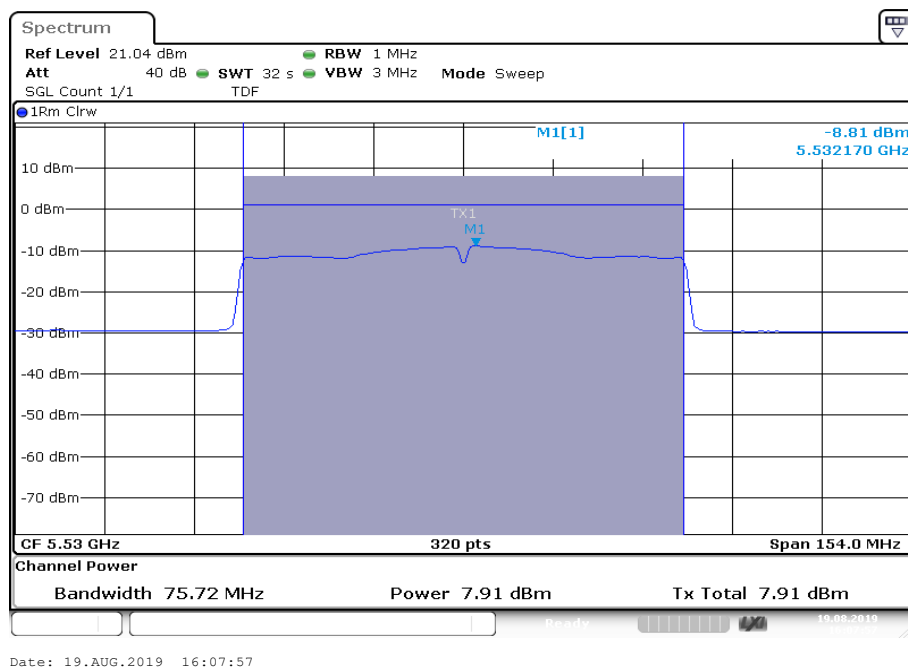
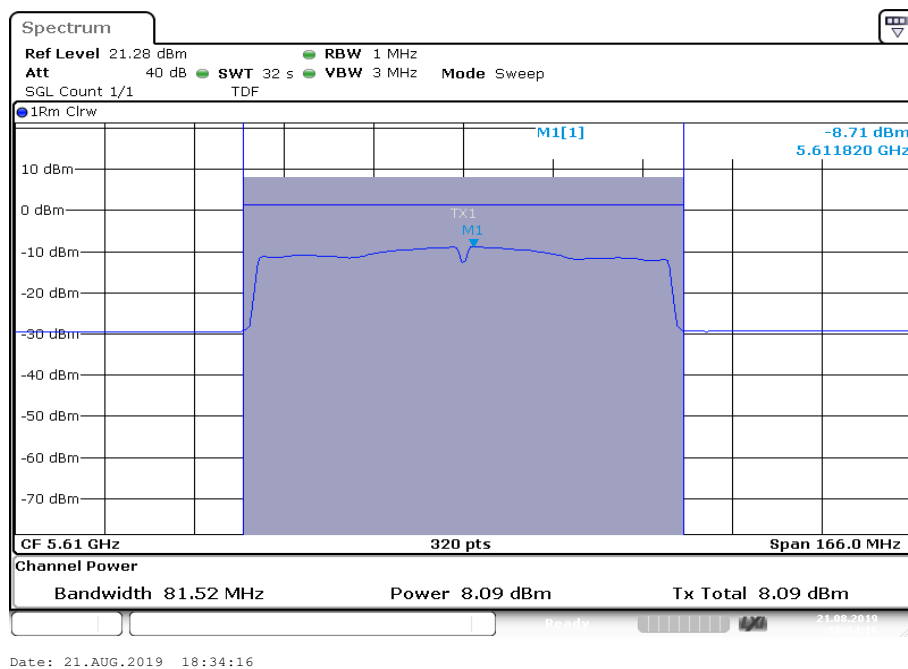
Plots: ac80– mode, Antenna port 1

Plot 1: U-NII-1; middle channel

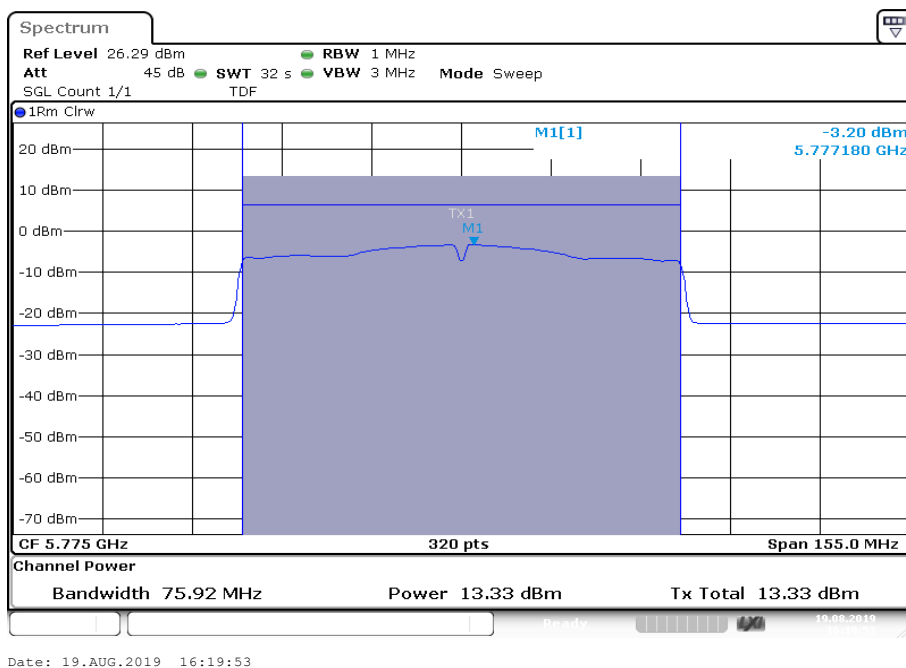


Plot 2: U-NII-2A; middle channel



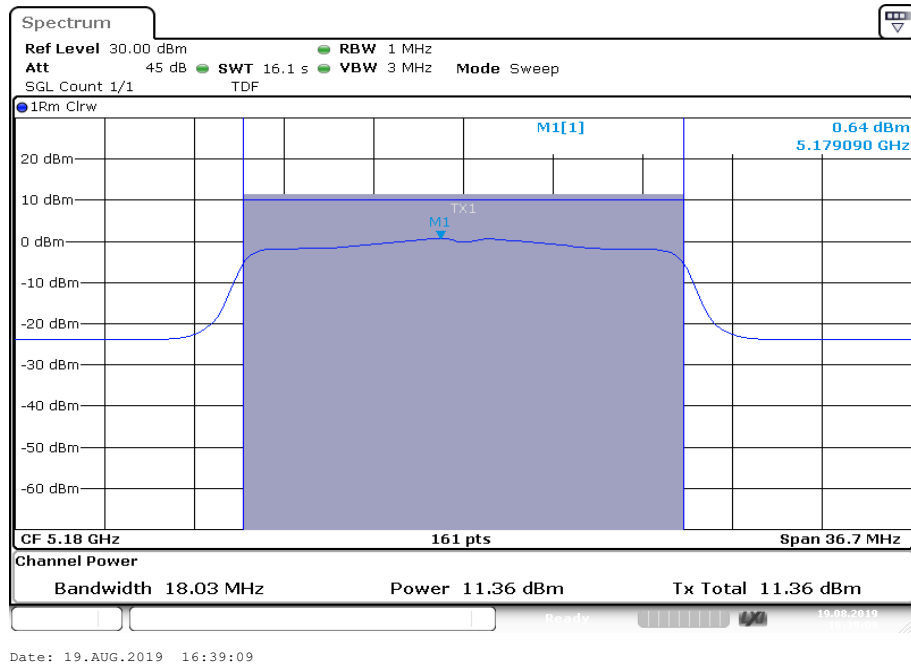
Plot 3: U-NII-2C; lowest channel**Plot 4:** U-NII-2C; highest channel

Plot 5: U-NII-3; middle channel

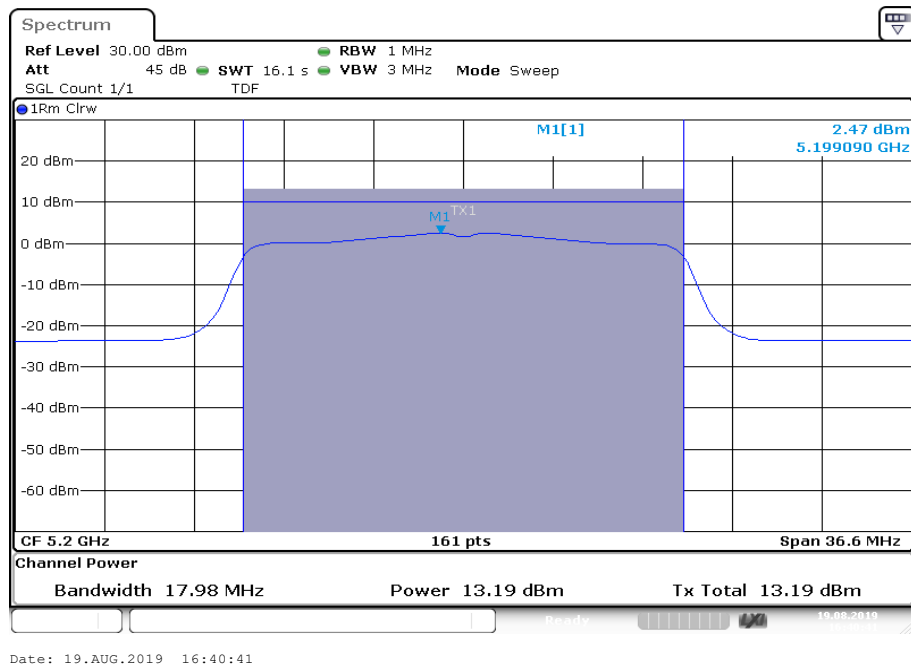


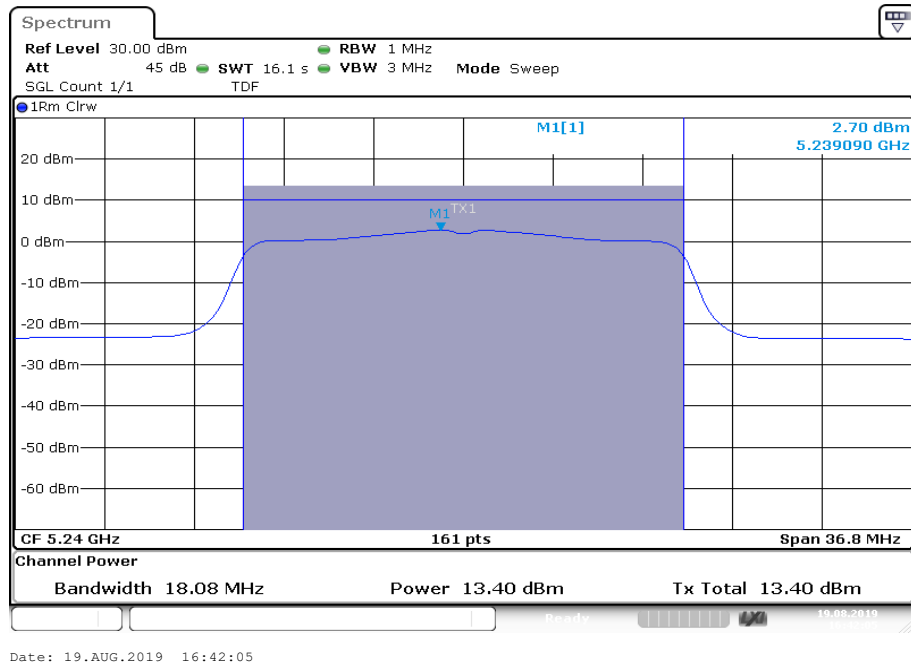
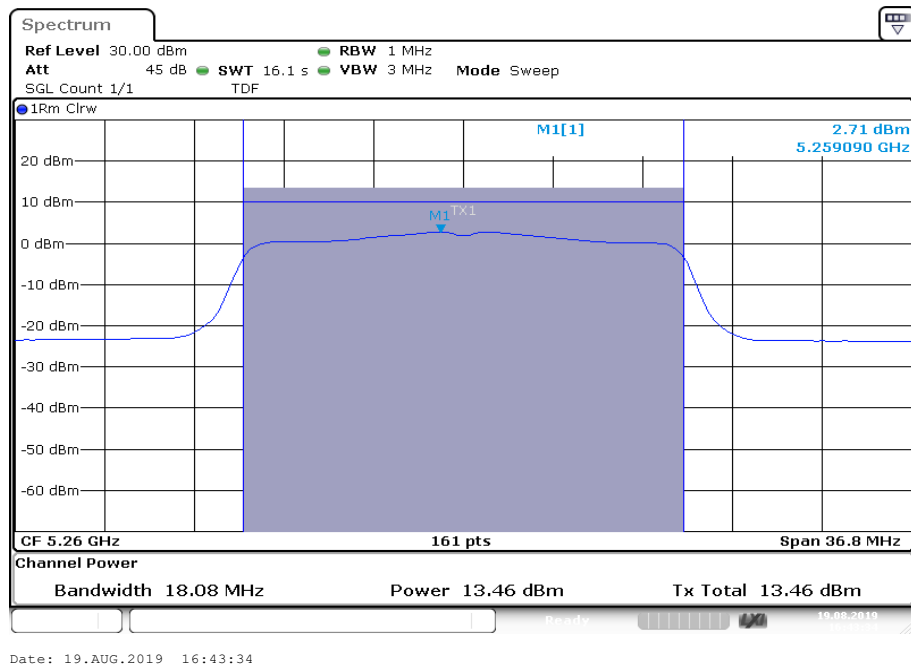
Plots: n/ac HT20 – mode, Antenna port 2

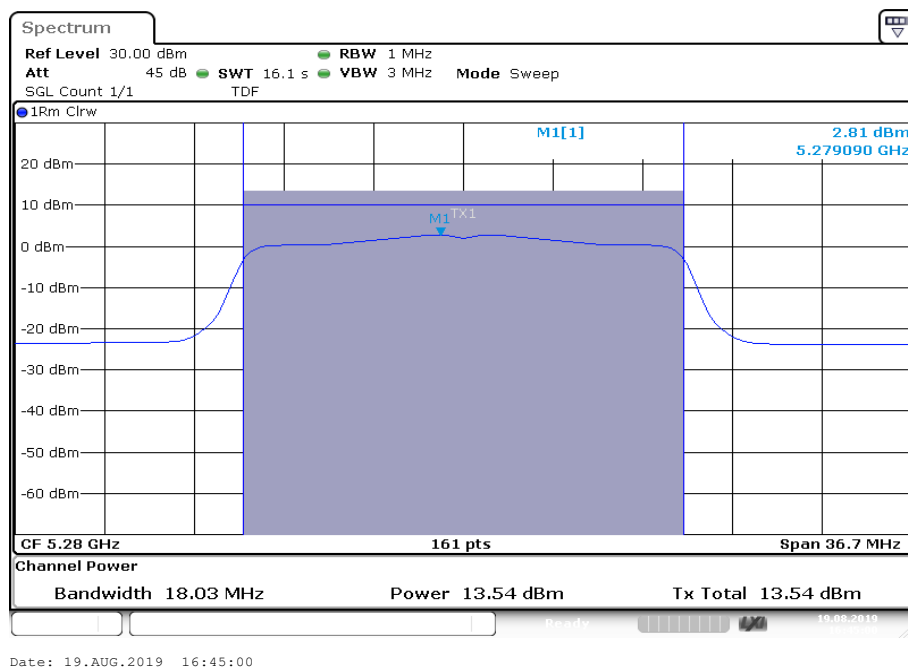
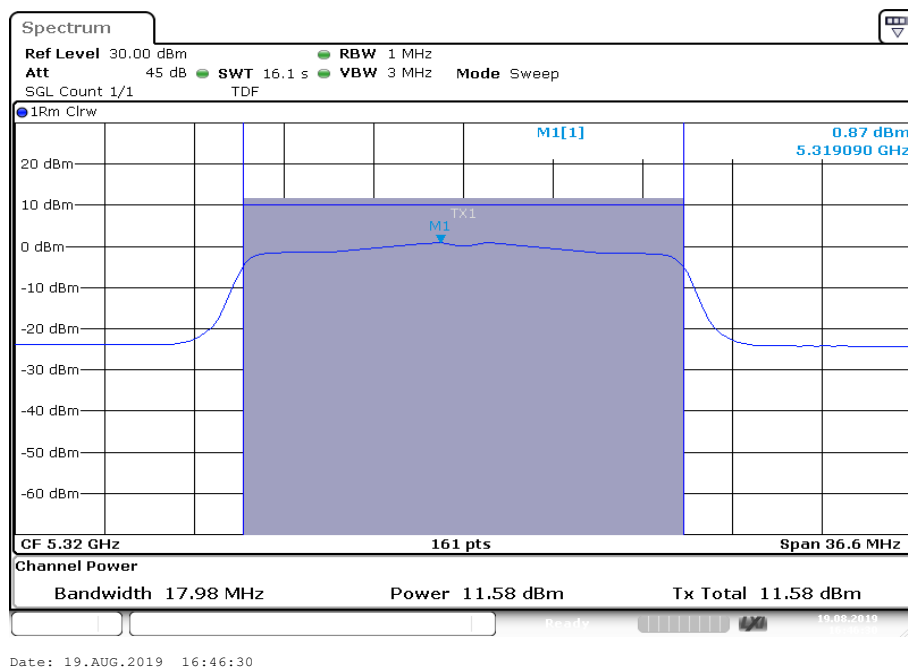
Plot 1: U-NII-1; lowest channel

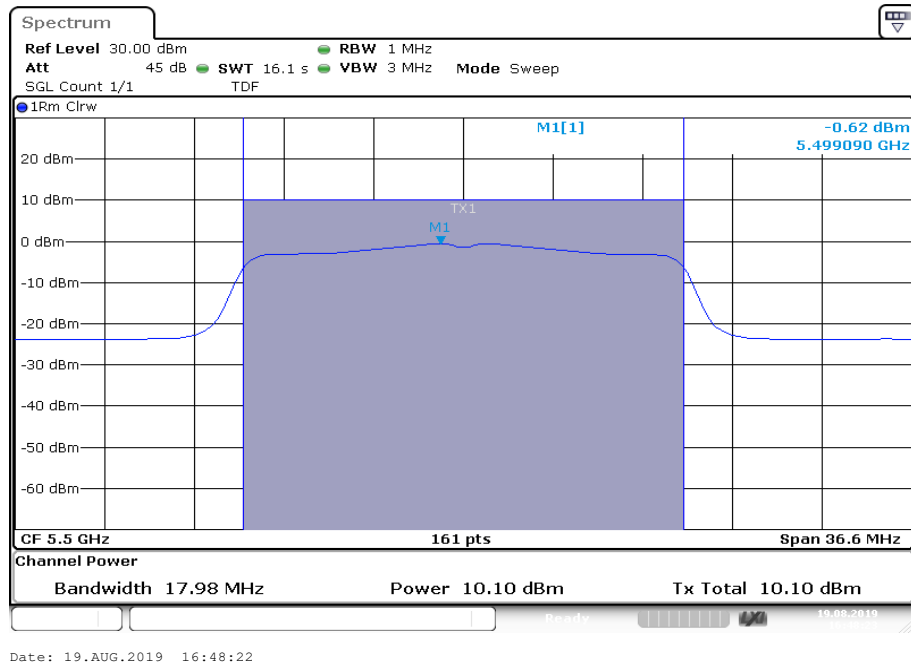
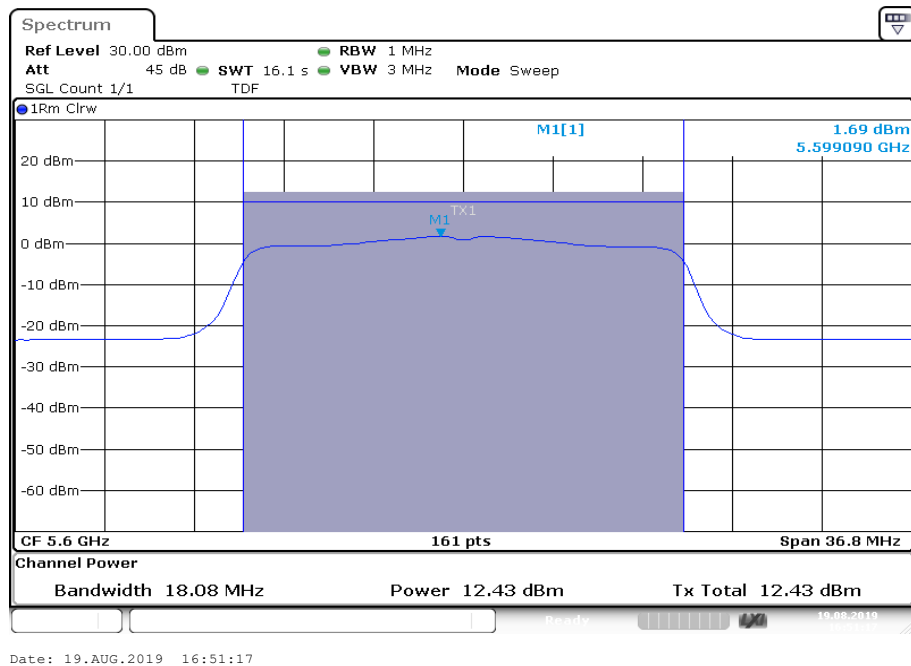


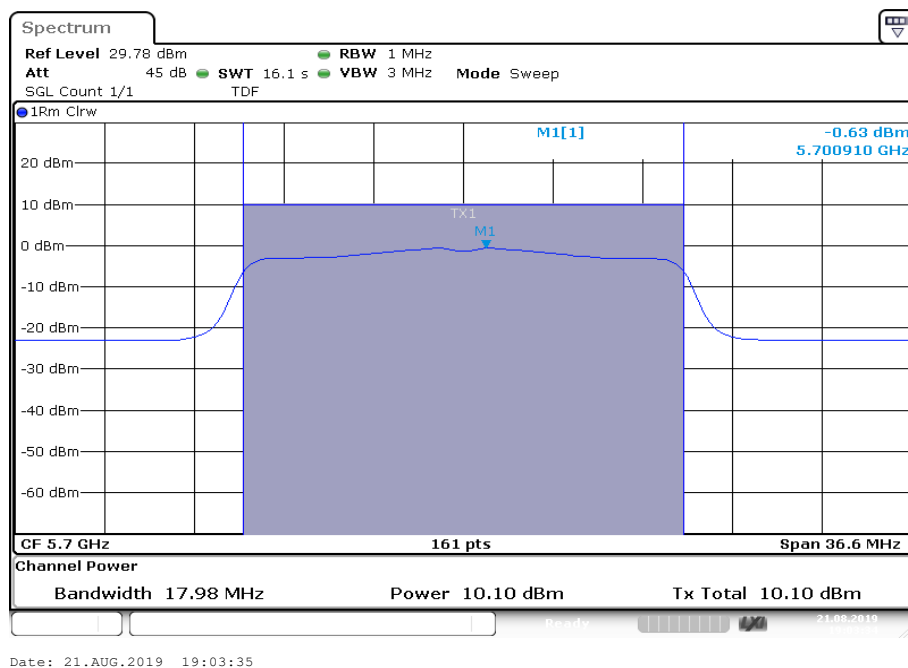
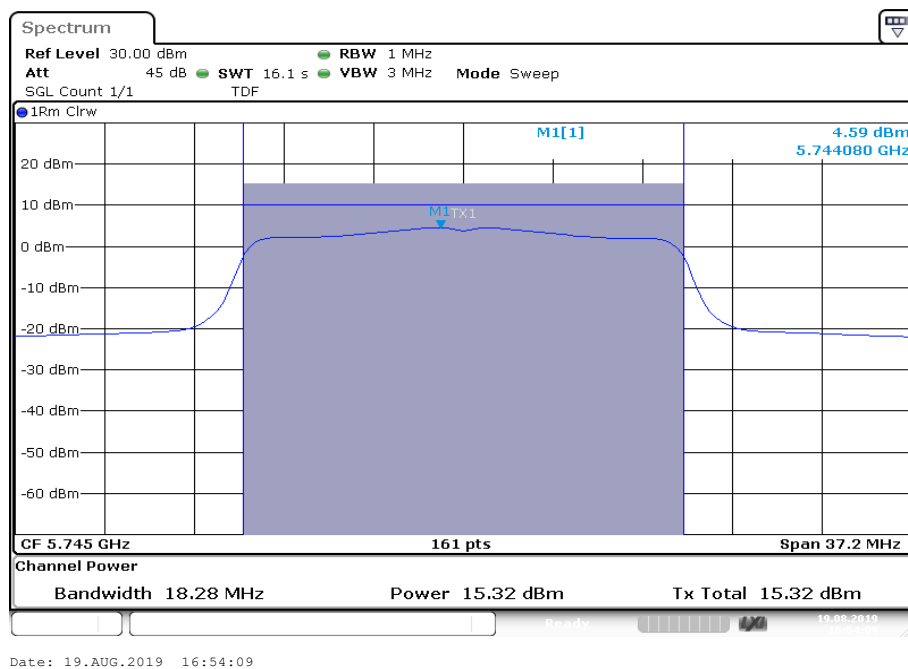
Plot 2: U-NII-1; middle channel

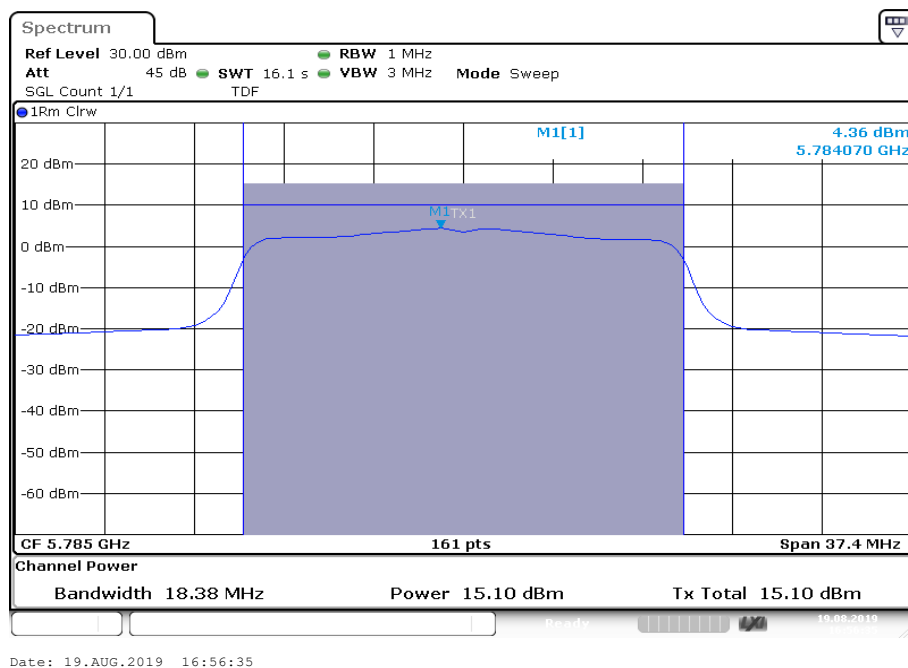
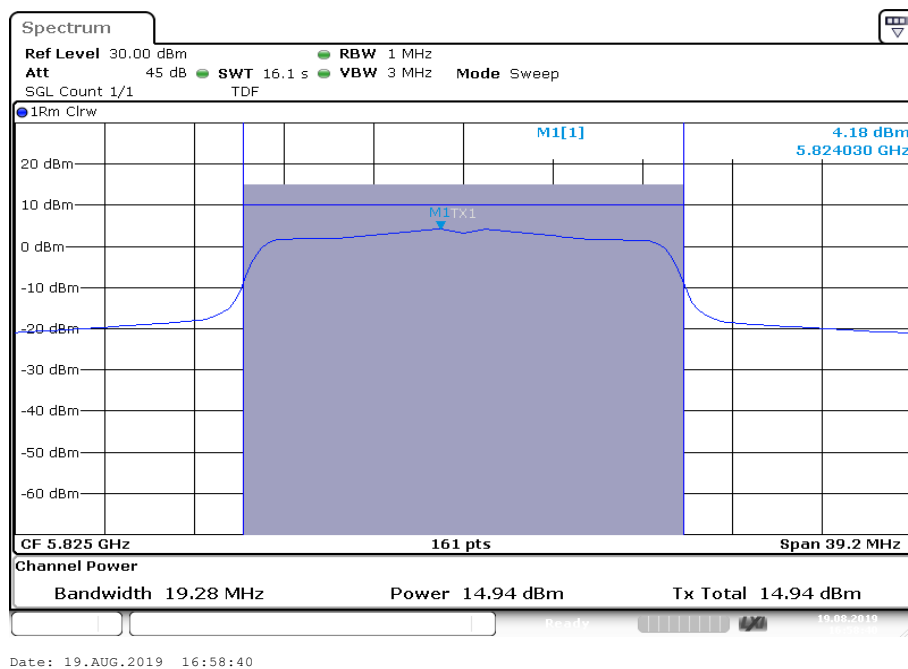


Plot 3: U-NII-1; highest channel**Plot 4:** U-NII-2A; lowest channel

Plot 5: U-NII-2A; middle channel**Plot 6:** U-NII-2A; highest channel

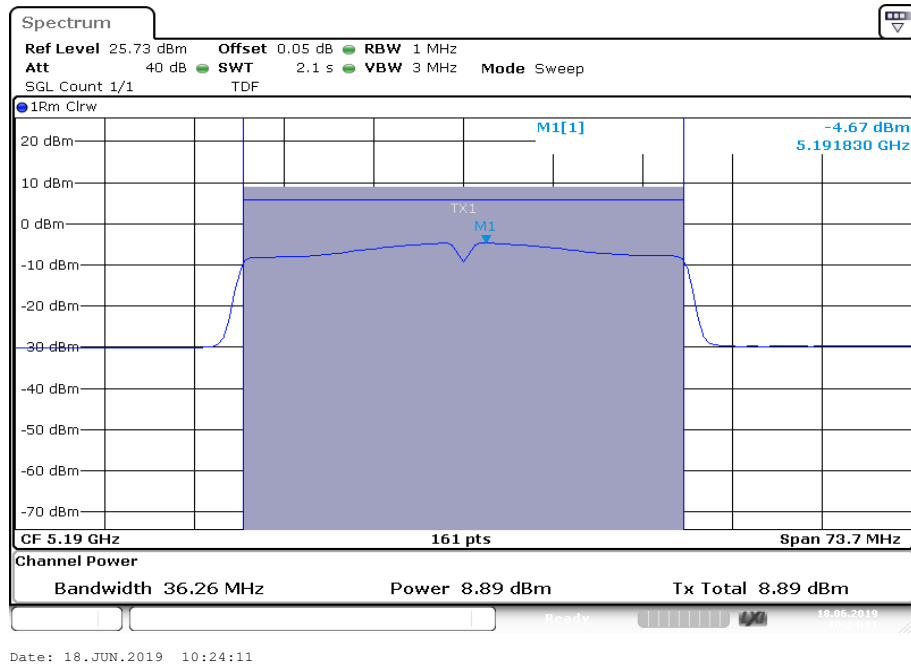
Plot 7: U-NII-2C; lowest channel**Plot 8:** U-NII-2C; middle channel

Plot 9: U-NII-2C; highest channel**Plot 10:** U-NII-3; lowest channel

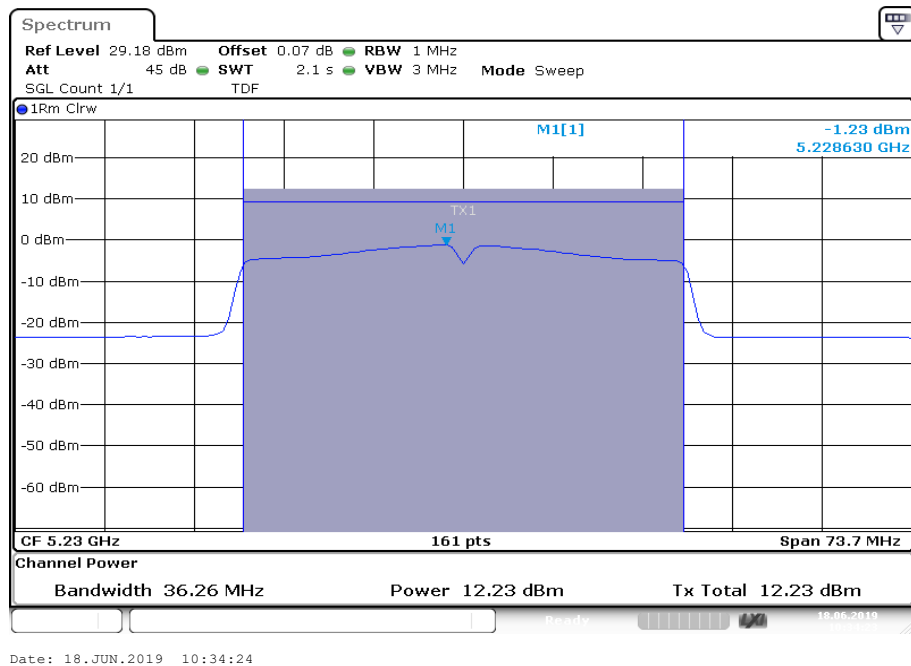
Plot 11: U-NII-3; middle channel**Plot 12:** U-NII-3; highest channel

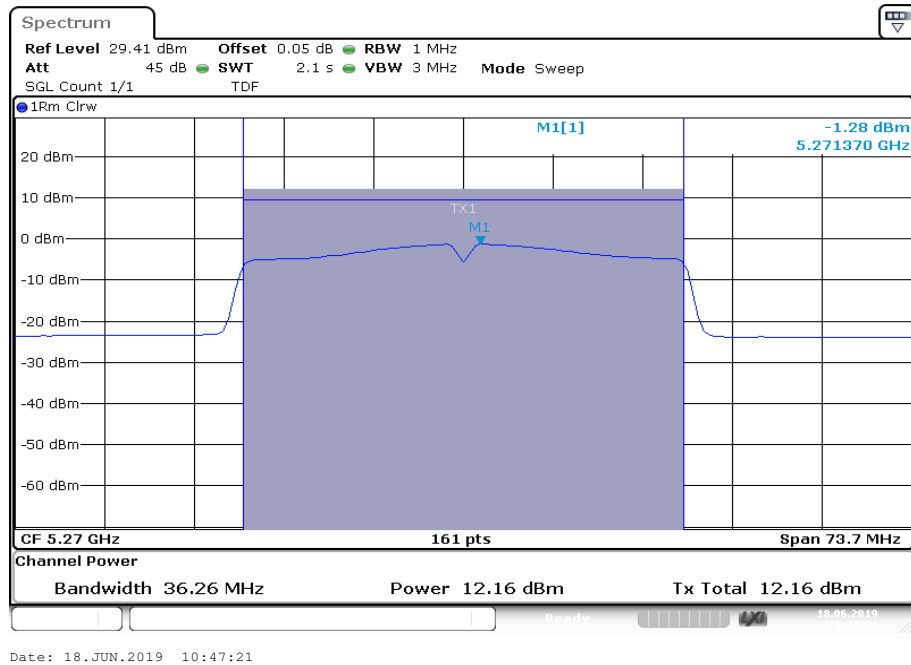
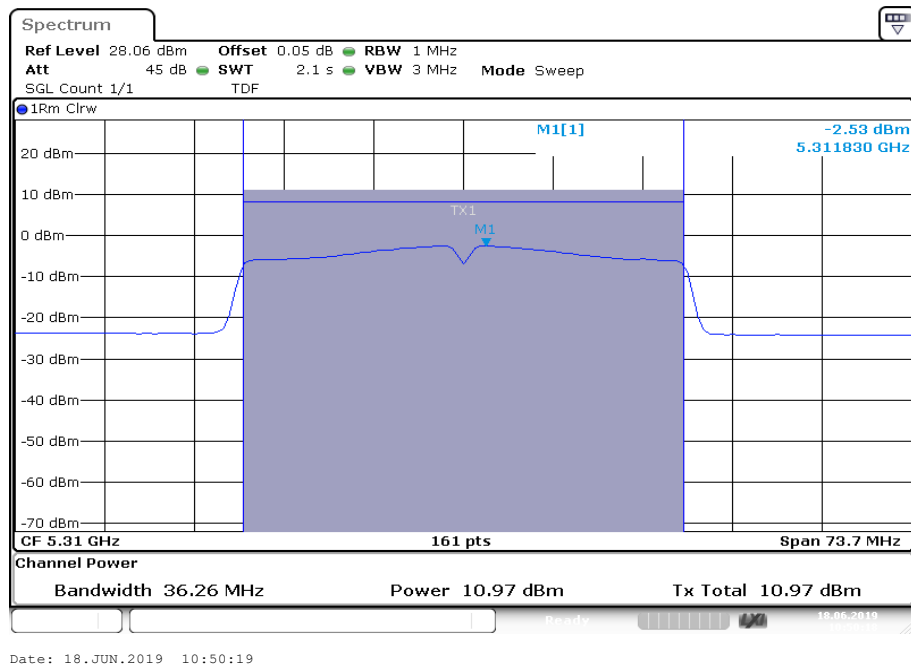
Plots: n/ac HT40 – mode, Antenna port 2

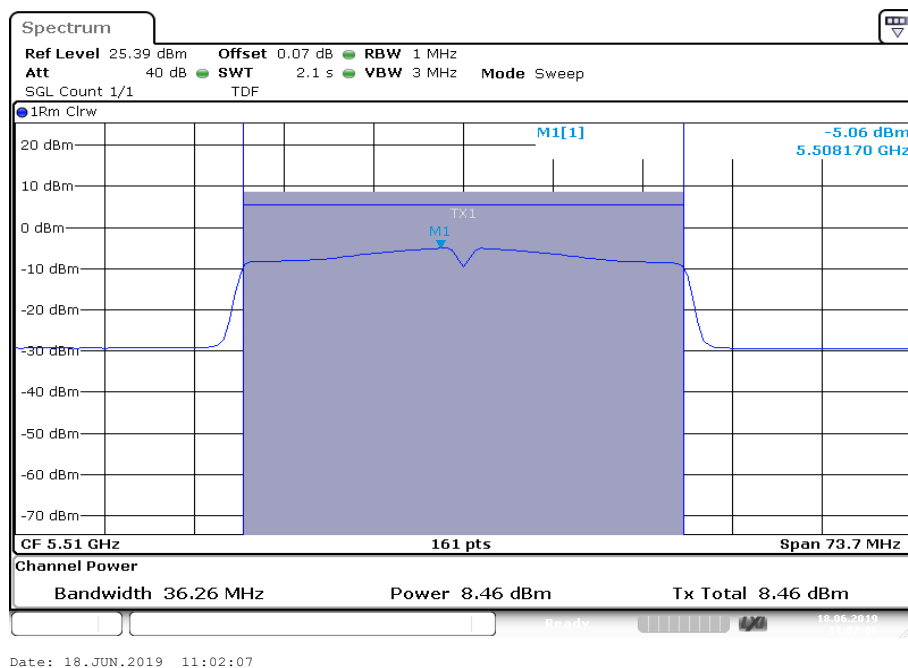
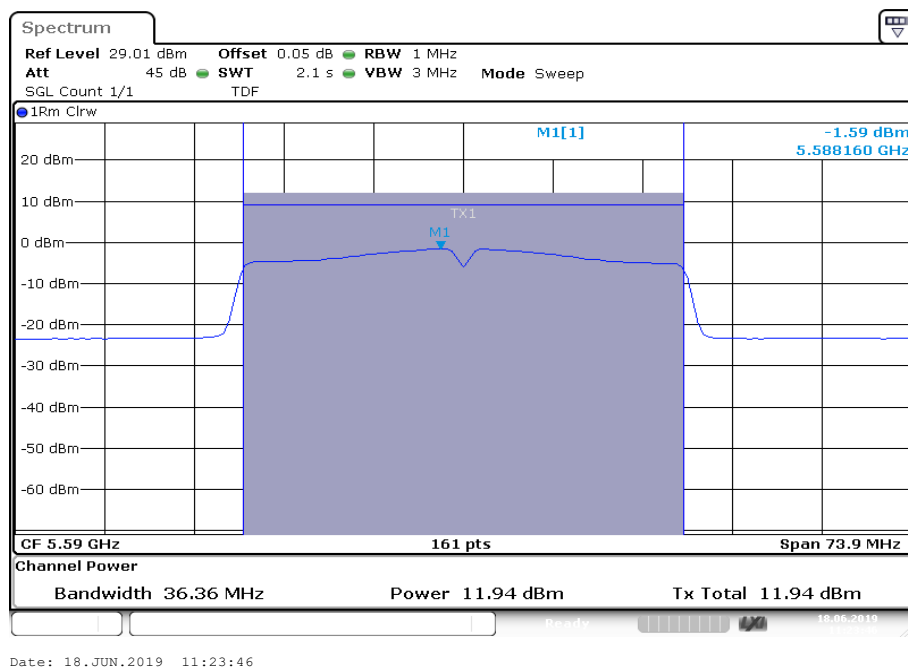
Plot 1: U-NII-1; lowest channel

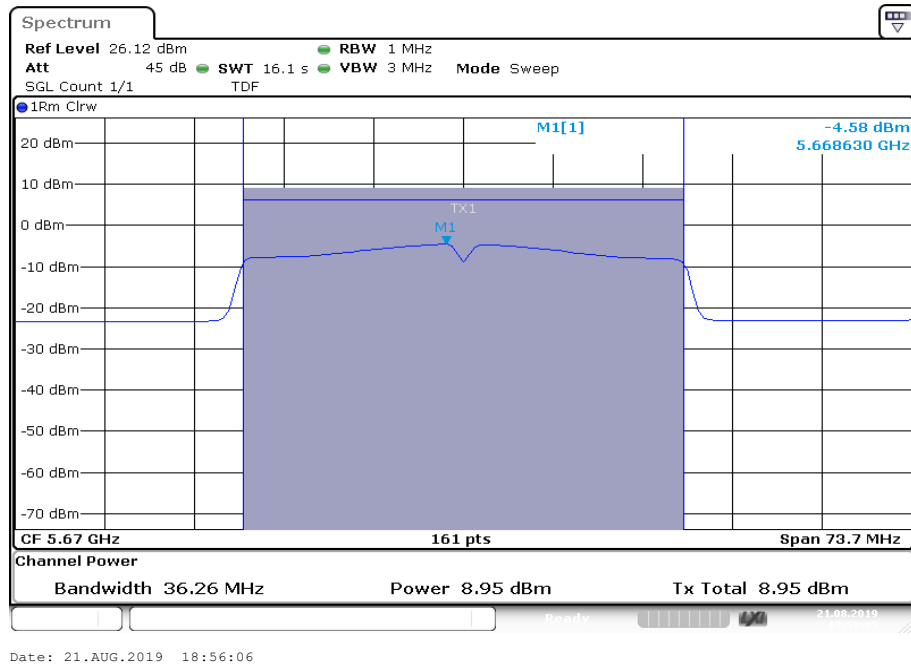
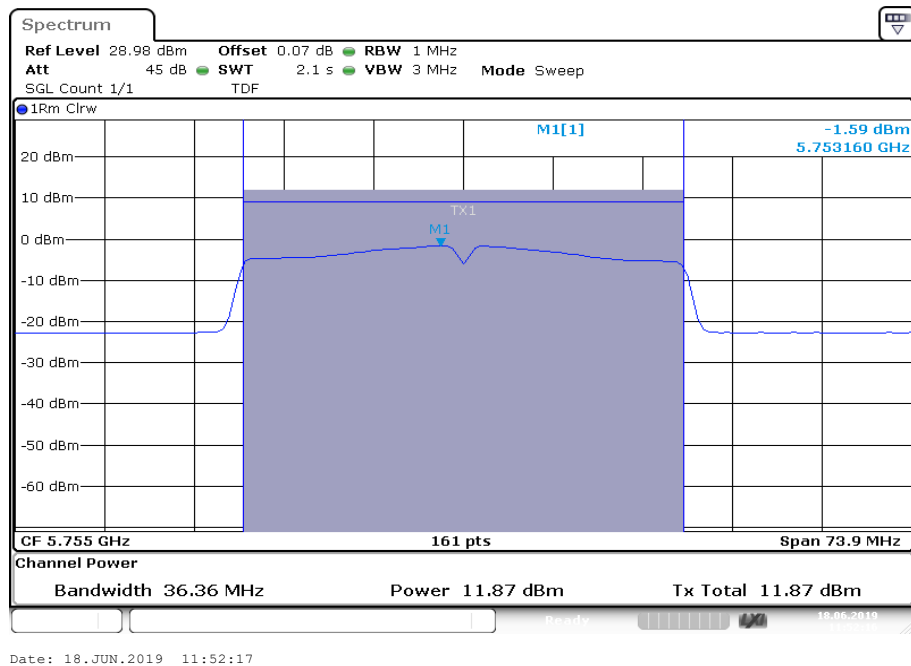


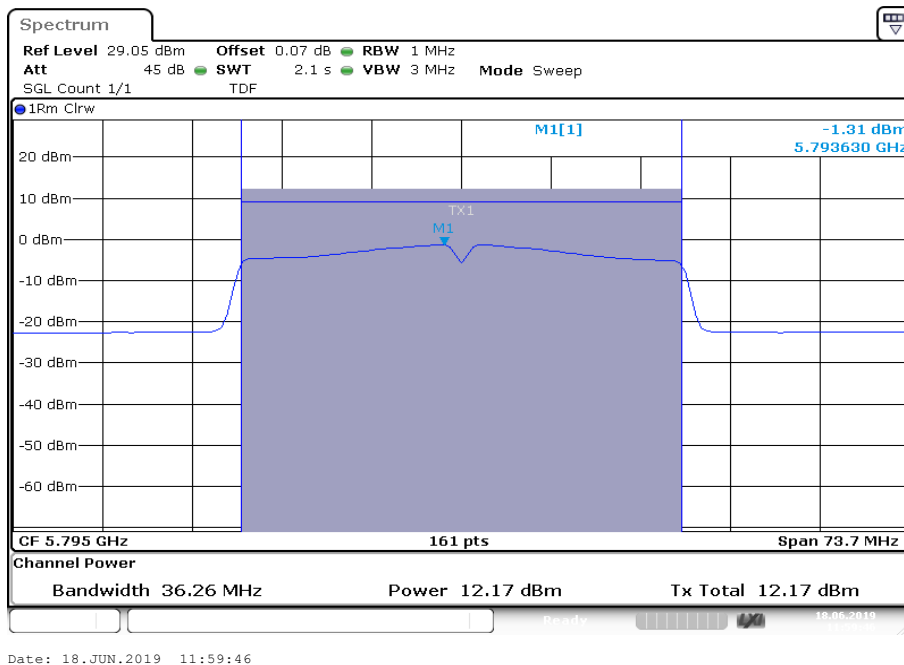
Plot 2: U-NII-1; highest channel



Plot 3: U-NII-2A; lowest channel**Plot 4:** U-NII-2A; highest channel

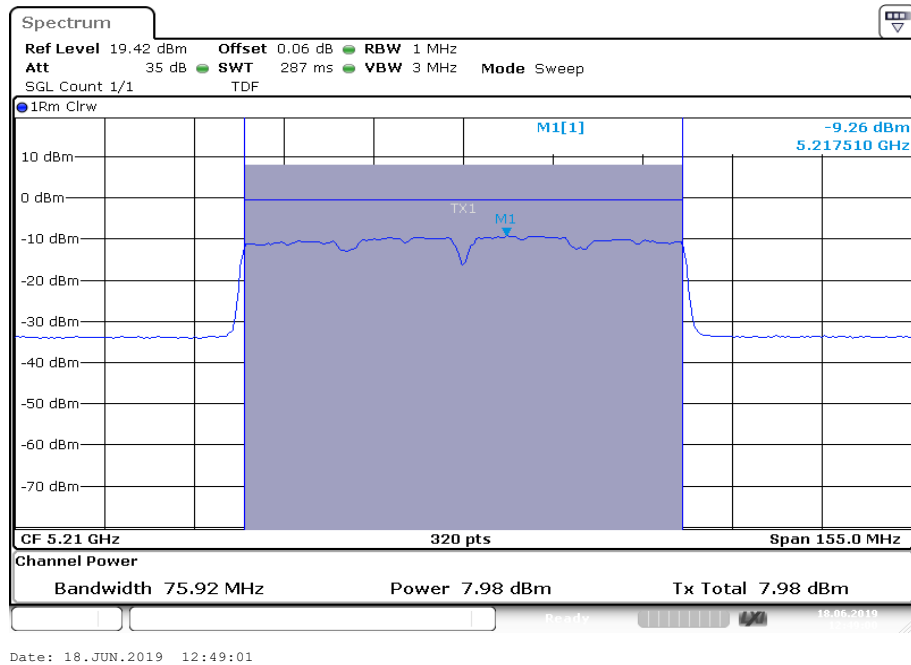
Plot 5: U-NII-2C; lowest channel**Plot 6:** U-NII-2C; middle channel

Plot 7: U-NII-2C; highest channel**Plot 8:** U-NII-3; lowest channel

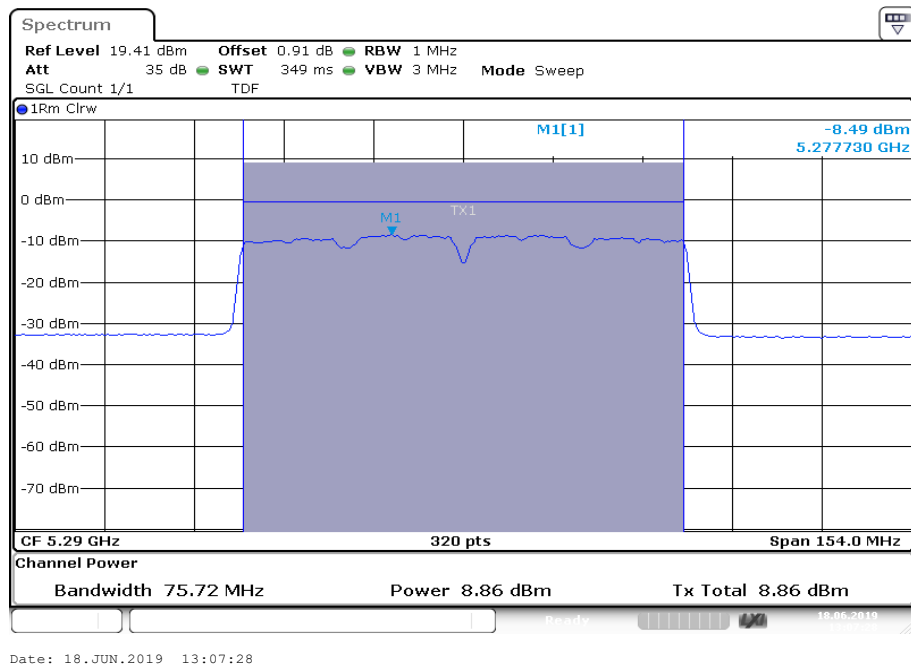
Plot 9: U-NII-3; highest channel

Plots: ac80– mode, Antenna port 2

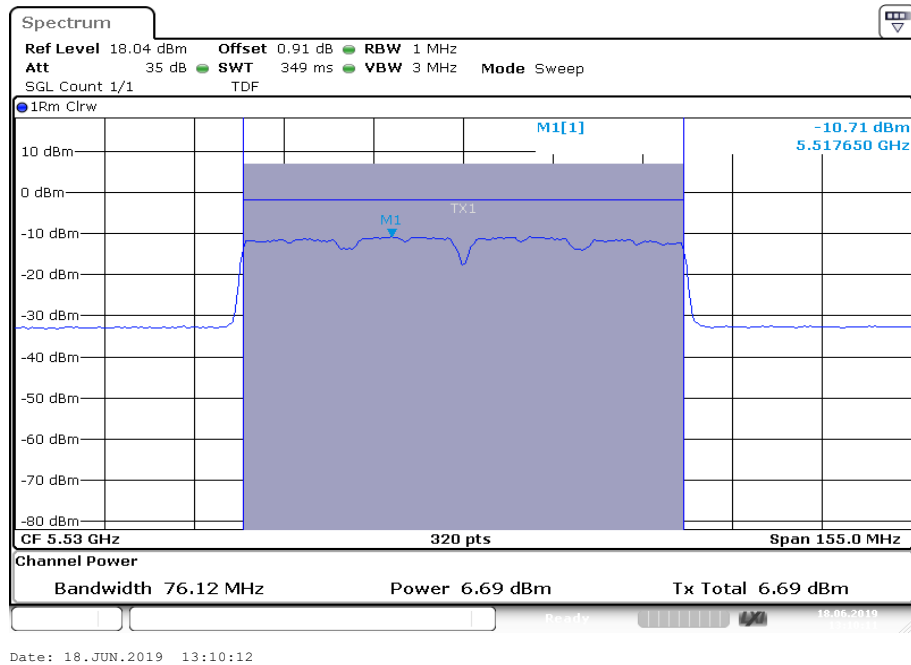
Plot 1: U-NII-1; middle channel



Plot 2: U-NII-2A; middle channel



Plot 3: U-NII-2C; lowest channel



Plot 4: U-NII-2C; highest channel

