



## 802.11ax-HE80 26dB Bandwidth


## Channel 7 (5985MHz)

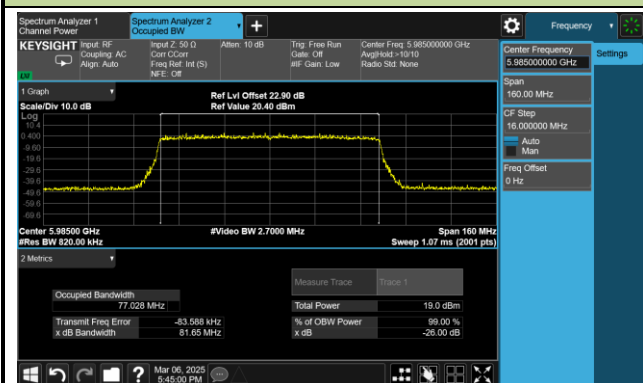


## Channel 55 (6225MHz)

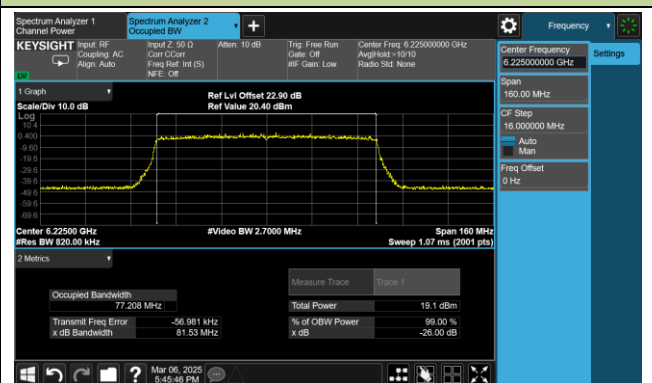


## Channel 87 (6385MHz)

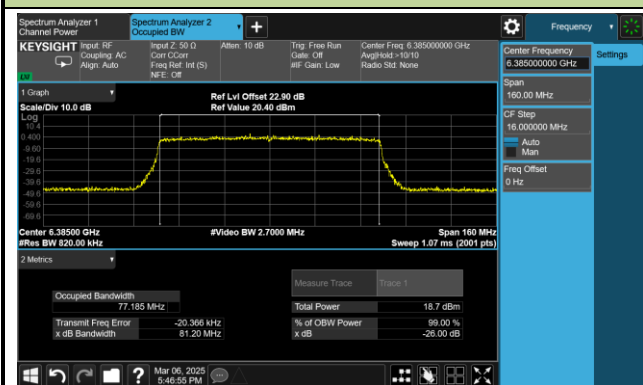


## Channel 135 (6625MHz)

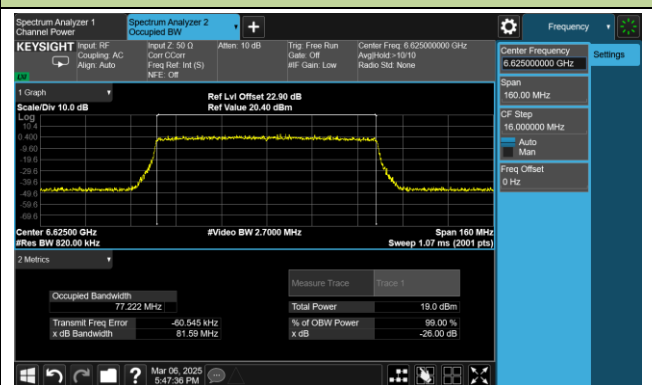

## Channel 151 (6705MHz)

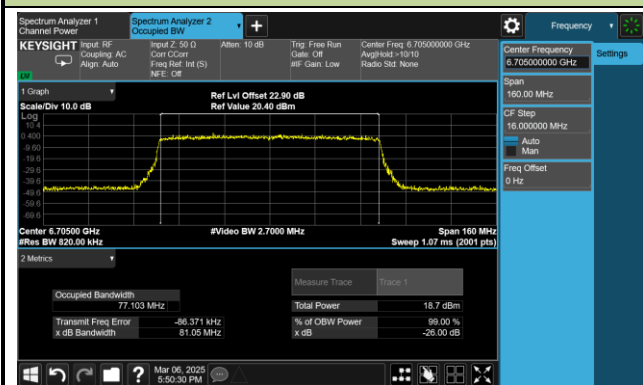


## Channel 167 (6785MHz)

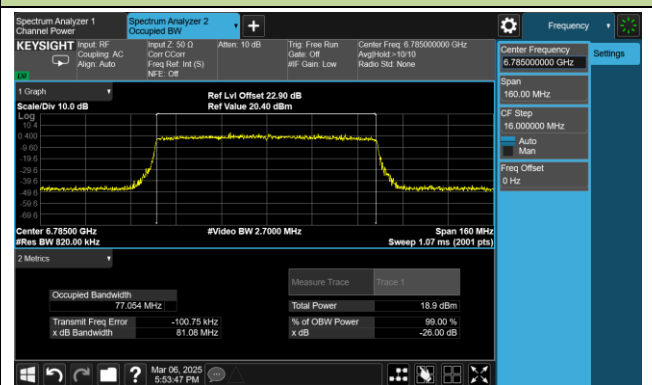


## 802.11ax-HE160 26dB Bandwidth


## Channel 15 (6025MHz)

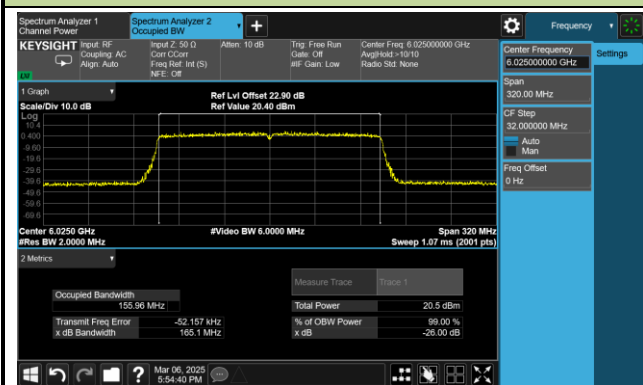


## Channel 47 (6185MHz)

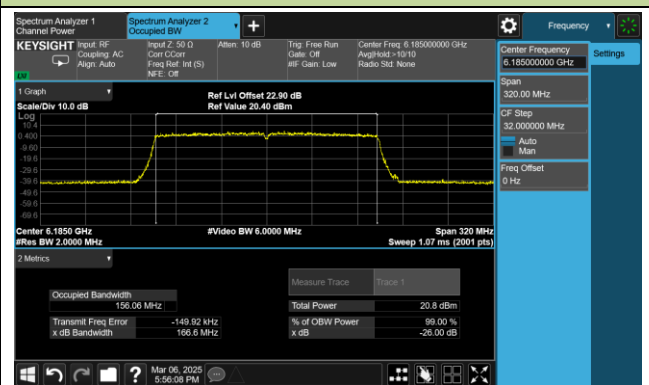


## Channel 79 (6345MHz)

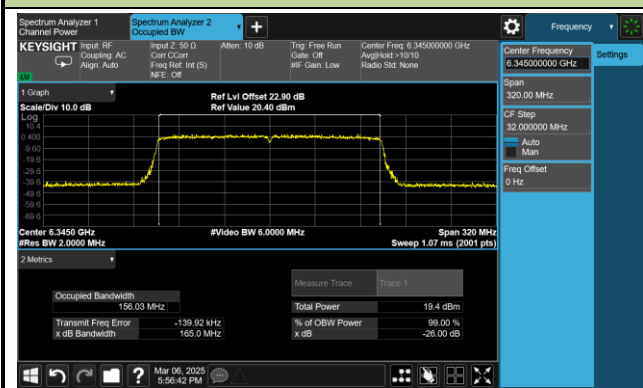

## Channel 111 (6505MHz)

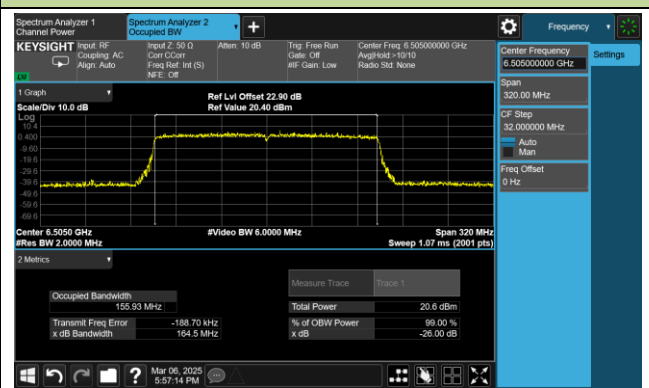

## Channel 143 (6665MHz)

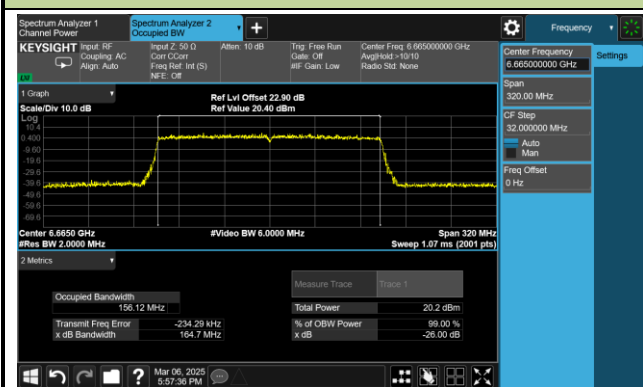

### A.3 Output Power Test Result

#### Client operating under the control of an indoor access point

Full RU:

|           |            |               |           |
|-----------|------------|---------------|-----------|
| Test Site | SIP-TR1    | Test Engineer | Ryan Wang |
| Test Date | 2025-02-25 |               |           |

| Test Mode     | Data Rate/<br>MCS | Channel No. | Freq. (MHz) | Ant 0 Average Power (dBm) | Ant 1 Average Power (dBm) | Total Average Power (dBm) | Antenna Gain (dBi) | EIRP (dBm) | Limit (dBm) |
|---------------|-------------------|-------------|-------------|---------------------------|---------------------------|---------------------------|--------------------|------------|-------------|
| 802.11ax-HE20 | MCS0              | 1           | 5955        | 1.12                      | 1.77                      | 4.47                      | 3.82               | 8.29       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 49          | 6195        | 1.21                      | 1.47                      | 4.35                      | 3.82               | 8.17       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 93          | 6415        | -0.14                     | 1.67                      | 3.87                      | 3.82               | 7.69       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 97          | 6435        | 0.63                      | 2.04                      | 4.40                      | 3.74               | 8.14       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 105         | 6475        | 0.86                      | 2.51                      | 4.77                      | 3.74               | 8.51       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 113         | 6515        | 0.74                      | 2.23                      | 4.56                      | 3.74               | 8.30       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 117         | 6535        | 0.49                      | 2.11                      | 4.39                      | 3.68               | 8.07       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 149         | 6695        | 0.61                      | 1.95                      | 4.34                      | 3.68               | 8.02       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 181         | 6855        | -0.98                     | 1.08                      | 3.18                      | 3.68               | 6.86       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 185         | 6875        | -0.93                     | 0.92                      | 3.10                      | 3.72               | 6.82       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 189         | 6895        | -0.94                     | 0.38                      | 2.78                      | 3.72               | 6.50       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 209         | 6995        | -1.55                     | -0.24                     | 2.16                      | 3.72               | 5.88       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 229         | 7095        | -0.67                     | 1.42                      | 3.51                      | 3.72               | 7.23       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 233         | 7115        | -0.71                     | 1.23                      | 3.38                      | 3.72               | 7.10       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0              | 3           | 5965        | 3.42                      | 3.96                      | 6.71                      | 3.82               | 10.53      | ≤ 24.00     |
| 802.11ax-HE40 | MCS0              | 51          | 6205        | 3.71                      | 3.98                      | 6.86                      | 3.82               | 10.68      | ≤ 24.00     |
| 802.11ax-HE40 | MCS0              | 91          | 6405        | 2.78                      | 4.09                      | 6.49                      | 3.82               | 10.31      | ≤ 24.00     |
| 802.11ax-HE40 | MCS0              | 99          | 6445        | 2.69                      | 4.41                      | 6.64                      | 3.74               | 10.38      | ≤ 24.00     |
| 802.11ax-HE40 | MCS0              | 107         | 6485        | 2.14                      | 3.17                      | 5.70                      | 3.74               | 9.44       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0              | 115         | 6525        | 2.34                      | 4.02                      | 6.27                      | 3.74               | 10.01      | ≤ 24.00     |
| 802.11ax-HE40 | MCS0              | 123         | 6565        | 3.97                      | 4.73                      | 7.38                      | 3.68               | 11.06      | ≤ 24.00     |
| 802.11ax-HE40 | MCS0              | 147         | 6685        | 3.56                      | 4.47                      | 7.05                      | 3.68               | 10.73      | ≤ 24.00     |
| 802.11ax-HE40 | MCS0              | 179         | 6845        | 2.96                      | 4.57                      | 6.85                      | 3.68               | 10.53      | ≤ 24.00     |
| 802.11ax-HE40 | MCS0              | 187         | 6885        | 2.85                      | 4.36                      | 6.68                      | 3.72               | 10.40      | ≤ 24.00     |
| 802.11ax-HE40 | MCS0              | 195         | 6925        | 3.27                      | 4.42                      | 6.89                      | 3.72               | 10.61      | ≤ 24.00     |
| 802.11ax-HE40 | MCS0              | 211         | 7005        | 3.21                      | 4.24                      | 6.77                      | 3.72               | 10.49      | ≤ 24.00     |
| 802.11ax-HE40 | MCS0              | 227         | 7085        | 2.52                      | 4.83                      | 6.84                      | 3.72               | 10.56      | ≤ 24.00     |

| Test Mode      | Data Rate/<br>MCS | Channel No. | Freq. (MHz) | Ant 0 Average Power (dBm) | Ant 1 Average Power (dBm) | Total Average Power (dBm) | Antenna Gain (dBi) | EIRP (dBm) | Limit (dBm) |
|----------------|-------------------|-------------|-------------|---------------------------|---------------------------|---------------------------|--------------------|------------|-------------|
| 802.11ax-HE80  | MCS0              | 7           | 5985        | 6.16                      | 7.29                      | 9.77                      | 3.82               | 13.59      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0              | 55          | 6225        | 6.61                      | 6.93                      | 9.78                      | 3.82               | 13.60      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0              | 87          | 6385        | 6.51                      | 7.12                      | 9.84                      | 3.82               | 13.66      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0              | 103         | 6465        | 6.88                      | 7.76                      | 10.35                     | 3.74               | 14.09      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0              | 119         | 6545        | 6.95                      | 8.02                      | 10.53                     | 3.74               | 14.27      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0              | 135         | 6625        | 6.71                      | 7.65                      | 10.22                     | 3.68               | 13.90      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0              | 151         | 6705        | 7.16                      | 7.87                      | 10.54                     | 3.68               | 14.22      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0              | 167         | 6785        | 6.51                      | 8.47                      | 10.61                     | 3.68               | 14.29      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0              | 183         | 6865        | 6.47                      | 8.37                      | 10.53                     | 3.68               | 14.21      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0              | 199         | 6945        | 7.08                      | 7.62                      | 10.37                     | 3.72               | 14.09      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0              | 215         | 7025        | 6.26                      | 8.16                      | 10.32                     | 3.72               | 14.04      | ≤ 24.00     |
| 802.11ax-HE160 | MCS0              | 15          | 6025        | 9.36                      | 9.79                      | 12.59                     | 3.82               | 16.41      | ≤ 24.00     |
| 802.11ax-HE160 | MCS0              | 47          | 6185        | 9.92                      | 10.11                     | 13.03                     | 3.82               | 16.85      | ≤ 24.00     |
| 802.11ax-HE160 | MCS0              | 79          | 6345        | 9.58                      | 10.02                     | 12.82                     | 3.82               | 16.64      | ≤ 24.00     |
| 802.11ax-HE160 | MCS0              | 111         | 6505        | 9.27                      | 10.25                     | 12.80                     | 3.74               | 16.54      | ≤ 24.00     |
| 802.11ax-HE160 | MCS0              | 143         | 6665        | 9.79                      | 10.59                     | 13.22                     | 3.68               | 16.90      | ≤ 24.00     |
| 802.11ax-HE160 | MCS0              | 175         | 6825        | 9.02                      | 10.72                     | 12.96                     | 3.68               | 16.64      | ≤ 24.00     |
| 802.11ax-HE160 | MCS0              | 207         | 6985        | 9.25                      | 9.78                      | 12.53                     | 3.72               | 16.25      | ≤ 24.00     |

Note 1: Total Average Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$ .

Note 2: EIRP (dBm) = Total Average Power (dBm) + Antenna Gain (dBi).

**Partial RU:**

|           |            |               |           |
|-----------|------------|---------------|-----------|
| Test Site | SIP-TR1    | Test Engineer | Ryan Wang |
| Test Date | 2025-02-25 |               |           |

| Test Mode     | Data Rate/<br>MCS | Channel No. | Freq. (MHz) | RU index  | Ant 0 Average Power (dBm) | Ant 1 Average Power (dBm) | Total Average Power (dBm) | Antenna Gain (dBi) | EIRP (dBm) | Limit (dBm) |
|---------------|-------------------|-------------|-------------|-----------|---------------------------|---------------------------|---------------------------|--------------------|------------|-------------|
| 802.11ax-HE20 | MCS0              | 1           | 5955        | RU26/0    | -8.53                     | -8.08                     | -5.29                     | 3.82               | -1.47      | ≤ 24.00     |
|               |                   |             |             | RU52/74   | -5.67                     | -5.07                     | -2.35                     | 3.82               | 1.47       | ≤ 24.00     |
|               |                   |             |             | RU106/106 | -2.48                     | -1.97                     | 0.79                      | 3.82               | 4.61       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 49          | 6195        | RU26/4    | -7.34                     | -6.77                     | -4.04                     | 3.82               | -0.22      | ≤ 24.00     |
|               |                   |             |             | RU52/75   | -5.59                     | -4.98                     | -2.26                     | 3.82               | 1.56       | ≤ 24.00     |
|               |                   |             |             | RU106/106 | -2.31                     | -1.61                     | 1.06                      | 3.82               | 4.88       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 93          | 6415        | RU26/8    | -9.65                     | -7.92                     | -5.69                     | 3.82               | -1.87      | ≤ 24.00     |
|               |                   |             |             | RU52/77   | -6.58                     | -4.81                     | -2.60                     | 3.82               | 1.22       | ≤ 24.00     |
|               |                   |             |             | RU106/107 | -3.45                     | -1.87                     | 0.42                      | 3.82               | 4.24       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 97          | 6435        | RU26/0    | -9.15                     | -6.88                     | -4.86                     | 3.74               | -1.12      | ≤ 24.00     |
|               |                   |             |             | RU52/74   | -5.66                     | -4.15                     | -1.83                     | 3.74               | 1.91       | ≤ 24.00     |
|               |                   |             |             | RU106/106 | -2.75                     | -1.36                     | 1.01                      | 3.74               | 4.75       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 105         | 6475        | RU26/4    | -7.95                     | -6.18                     | -3.97                     | 3.74               | -0.23      | ≤ 24.00     |
|               |                   |             |             | RU52/75   | -5.63                     | -4.19                     | -1.84                     | 3.74               | 1.90       | ≤ 24.00     |
|               |                   |             |             | RU106/106 | -2.86                     | -1.44                     | 0.92                      | 3.74               | 4.66       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 113         | 6515        | RU26/8    | -8.86                     | -7.39                     | -5.05                     | 3.74               | -1.31      | ≤ 24.00     |
|               |                   |             |             | RU52/77   | -6.09                     | -4.64                     | -2.29                     | 3.74               | 1.45       | ≤ 24.00     |
|               |                   |             |             | RU106/107 | -2.99                     | -1.58                     | 0.78                      | 3.74               | 4.52       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 117         | 6535        | RU26/0    | -9.08                     | -7.13                     | -4.99                     | 3.68               | -1.31      | ≤ 24.00     |
|               |                   |             |             | RU52/74   | -6.12                     | -4.04                     | -1.95                     | 3.68               | 1.73       | ≤ 24.00     |
|               |                   |             |             | RU106/106 | -2.87                     | -1.25                     | 1.03                      | 3.68               | 4.71       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 149         | 6695        | RU26/4    | -8.45                     | -6.69                     | -4.47                     | 3.68               | -0.79      | ≤ 24.00     |
|               |                   |             |             | RU52/75   | -6.14                     | -4.56                     | -2.27                     | 3.68               | 1.41       | ≤ 24.00     |
|               |                   |             |             | RU106/106 | -3.42                     | -1.73                     | 0.52                      | 3.68               | 4.20       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0              | 181         | 6855        | RU26/8    | -10.46                    | -9.05                     | -6.69                     | 3.68               | -3.01      | ≤ 24.00     |
|               |                   |             |             | RU52/77   | -7.42                     | -5.42                     | -3.30                     | 3.68               | 0.38       | ≤ 24.00     |
|               |                   |             |             | RU106/107 | -4.23                     | -2.42                     | -0.22                     | 3.68               | 3.46       | ≤ 24.00     |

| Test Mode     | Data Rate/MCS | Channel No. | Freq. (MHz) | RU index  | Ant 0 Average Power (dBm) | Ant 1 Average Power (dBm) | Total Average Power (dBm) | Antenna Gain (dBi) | EIRP (dBm) | Limit (dBm) |
|---------------|---------------|-------------|-------------|-----------|---------------------------|---------------------------|---------------------------|--------------------|------------|-------------|
| 802.11ax-HE20 | MCS0          | 185         | 6875        | RU26/8    | -11.12                    | -9.03                     | -6.94                     | 3.72               | -3.22      | ≤ 24.00     |
|               |               |             |             | RU52/77   | -7.92                     | -6.12                     | -3.92                     | 3.72               | -0.20      | ≤ 24.00     |
|               |               |             |             | RU106/107 | -4.89                     | -2.89                     | -0.77                     | 3.72               | 2.95       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0          | 189         | 6895        | RU26/0    | -10.83                    | -9.64                     | -7.18                     | 3.72               | -3.46      | ≤ 24.00     |
|               |               |             |             | RU52/74   | -7.64                     | -6.63                     | -4.10                     | 3.72               | -0.38      | ≤ 24.00     |
|               |               |             |             | RU106/106 | -4.58                     | -3.69                     | -1.10                     | 3.72               | 2.62       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0          | 209         | 6995        | RU26/4    | -10.14                    | -9.11                     | -6.58                     | 3.72               | -2.86      | ≤ 24.00     |
|               |               |             |             | RU52/75   | -7.87                     | -6.98                     | -4.39                     | 3.72               | -0.67      | ≤ 24.00     |
|               |               |             |             | RU106/106 | -5.19                     | -3.88                     | -1.48                     | 3.72               | 2.24       | ≤ 24.00     |
| 802.11ax-HE20 | MCS0          | 233         | 7115        | RU26/8    | -10.65                    | -8.03                     | -6.14                     | 3.72               | -2.42      | ≤ 24.00     |
|               |               |             |             | RU52/77   | -7.72                     | -5.43                     | -3.42                     | 3.72               | 0.30       | ≤ 24.00     |
|               |               |             |             | RU106/107 | -4.45                     | -2.24                     | -0.20                     | 3.72               | 3.52       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0          | 3           | 5965        | RU242/122 | 0.46                      | 1.26                      | 3.89                      | 3.82               | 7.71       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0          | 51          | 6205        | RU242/122 | 0.31                      | 0.65                      | 3.49                      | 3.82               | 7.31       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0          | 91          | 6405        | RU242/123 | -0.39                     | 0.63                      | 3.16                      | 3.82               | 6.98       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0          | 99          | 6445        | RU242/122 | -0.38                     | 0.98                      | 3.36                      | 3.74               | 7.10       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0          | 107         | 6485        | RU242/123 | -1.13                     | 0.04                      | 2.50                      | 3.74               | 6.24       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0          | 115         | 6525        | RU242/123 | -0.25                     | 1.16                      | 3.52                      | 3.74               | 7.26       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0          | 123         | 6565        | RU242/122 | 0.82                      | 2.46                      | 4.73                      | 3.68               | 8.41       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0          | 147         | 6685        | RU242/122 | 0.54                      | 1.51                      | 4.06                      | 3.68               | 7.74       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0          | 179         | 6845        | RU242/123 | -1.32                     | 0.96                      | 2.98                      | 3.68               | 6.66       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0          | 187         | 6885        | RU242/123 | -0.97                     | 0.75                      | 2.98                      | 3.72               | 6.70       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0          | 195         | 6925        | RU242/122 | -1.21                     | 0.30                      | 2.62                      | 3.72               | 6.34       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0          | 211         | 7005        | RU242/122 | -0.93                     | 0.51                      | 2.86                      | 3.72               | 6.58       | ≤ 24.00     |
| 802.11ax-HE40 | MCS0          | 227         | 7085        | RU242/123 | -0.97                     | 1.12                      | 3.21                      | 3.72               | 6.93       | ≤ 24.00     |

| Test Mode      | Data Rate/MCS | Channel No. | Freq. (MHz) | RU index  | Ant 0 Average Power (dBm) | Ant 1 Average Power (dBm) | Total Average Power (dBm) | Antenna Gain (dBi) | EIRP (dBm) | Limit (dBm) |
|----------------|---------------|-------------|-------------|-----------|---------------------------|---------------------------|---------------------------|--------------------|------------|-------------|
| 802.11ax-HE80  | MCS0          | 7           | 5985        | RU484/130 | 3.48                      | 3.79                      | 6.65                      | 3.82               | 10.47      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0          | 55          | 6225        | RU484/130 | 3.81                      | 4.05                      | 6.94                      | 3.82               | 10.76      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0          | 87          | 6385        | RU484/131 | 2.86                      | 4.12                      | 6.55                      | 3.82               | 10.37      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0          | 103         | 6465        | RU484/130 | 2.71                      | 4.12                      | 6.48                      | 3.74               | 10.22      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0          | 119         | 6545        | RU484/131 | 4.32                      | 5.03                      | 7.70                      | 3.74               | 11.44      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0          | 135         | 6625        | RU484/130 | 1.79                      | 3.02                      | 5.46                      | 3.68               | 9.14       | ≤ 24.00     |
| 802.11ax-HE80  | MCS0          | 151         | 6705        | RU484/130 | 3.43                      | 4.26                      | 6.88                      | 3.68               | 10.56      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0          | 167         | 6785        | RU484/131 | 2.82                      | 4.84                      | 6.96                      | 3.68               | 10.64      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0          | 183         | 6865        | RU484/131 | 3.14                      | 4.50                      | 6.88                      | 3.68               | 10.56      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0          | 199         | 6945        | RU484/130 | 3.48                      | 4.14                      | 6.83                      | 3.72               | 10.55      | ≤ 24.00     |
| 802.11ax-HE80  | MCS0          | 215         | 7025        | RU484/131 | 3.27                      | 5.03                      | 7.25                      | 3.72               | 10.97      | ≤ 24.00     |
| 802.11ax-HE160 | MCS0          | 15          | 6025        | RU996/134 | 6.14                      | 6.92                      | 9.56                      | 3.82               | 13.38      | ≤ 24.00     |
| 802.11ax-HE160 | MCS0          | 47          | 6185        | RU996/134 | 6.94                      | 7.12                      | 10.04                     | 3.82               | 13.86      | ≤ 24.00     |
| 802.11ax-HE160 | MCS0          | 79          | 6345        | RU996/135 | 6.51                      | 6.67                      | 9.60                      | 3.82               | 13.42      | ≤ 24.00     |
| 802.11ax-HE160 | MCS0          | 111         | 6505        | RU996/134 | 6.35                      | 7.45                      | 9.95                      | 3.74               | 13.69      | ≤ 24.00     |
| 802.11ax-HE160 | MCS0          | 143         | 6665        | RU996/134 | 6.31                      | 7.15                      | 9.76                      | 3.68               | 13.44      | ≤ 24.00     |
| 802.11ax-HE160 | MCS0          | 175         | 6825        | RU996/135 | 6.42                      | 8.21                      | 10.42                     | 3.68               | 14.10      | ≤ 24.00     |
| 802.11ax-HE160 | MCS0          | 207         | 6985        | RU996/134 | 6.32                      | 7.23                      | 9.81                      | 3.72               | 13.53      | ≤ 24.00     |

Note 1: Total Average Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$ .

Note 2: EIRP (dBm) = Total Average Power (dBm) + Antenna Gain (dBi).

### Client operating under the control of a standard power access point

#### Full RU:

|           |            |               |           |
|-----------|------------|---------------|-----------|
| Test Site | SIP-TR1    | Test Engineer | Ryan Wang |
| Test Date | 2025-02-25 |               |           |

| Test Mode      | Data Rate/<br>MCS | Channel No. | Freq. (MHz) | Ant 0 Average Power (dBm) | Ant 1 Average Power (dBm) | Total Average Power (dBm) | Antenna Gain (dBi) | EIRP (dBm) | Limit (dBm) |
|----------------|-------------------|-------------|-------------|---------------------------|---------------------------|---------------------------|--------------------|------------|-------------|
| 802.11ax-HE20  | MCS0              | 1           | 5955        | 10.48                     | 11.07                     | 13.80                     | 3.82               | 17.62      | ≤ 30.00     |
| 802.11ax-HE20  | MCS0              | 49          | 6195        | 10.89                     | 10.84                     | 13.88                     | 3.82               | 17.70      | ≤ 30.00     |
| 802.11ax-HE20  | MCS0              | 93          | 6415        | 10.65                     | 10.93                     | 13.80                     | 3.82               | 17.62      | ≤ 30.00     |
| 802.11ax-HE20  | MCS0              | 117         | 6535        | 10.81                     | 11.59                     | 14.23                     | 3.68               | 17.91      | ≤ 30.00     |
| 802.11ax-HE20  | MCS0              | 149         | 6695        | 10.86                     | 11.24                     | 14.06                     | 3.68               | 17.74      | ≤ 30.00     |
| 802.11ax-HE20  | MCS0              | 181         | 6855        | 10.38                     | 11.91                     | 14.22                     | 3.68               | 17.90      | ≤ 30.00     |
| 802.11ax-HE40  | MCS0              | 3           | 5965        | 10.43                     | 11.18                     | 13.83                     | 3.82               | 17.65      | ≤ 30.00     |
| 802.11ax-HE40  | MCS0              | 51          | 6205        | 10.73                     | 10.94                     | 13.85                     | 3.82               | 17.67      | ≤ 30.00     |
| 802.11ax-HE40  | MCS0              | 91          | 6405        | 10.89                     | 11.42                     | 14.17                     | 3.82               | 17.99      | ≤ 30.00     |
| 802.11ax-HE40  | MCS0              | 123         | 6565        | 10.91                     | 11.48                     | 14.21                     | 3.68               | 17.89      | ≤ 30.00     |
| 802.11ax-HE40  | MCS0              | 147         | 6685        | 10.38                     | 11.12                     | 13.78                     | 3.68               | 17.46      | ≤ 30.00     |
| 802.11ax-HE40  | MCS0              | 179         | 6845        | 10.28                     | 11.57                     | 13.98                     | 3.68               | 17.66      | ≤ 30.00     |
| 802.11ax-HE80  | MCS0              | 7           | 5985        | 10.52                     | 11.36                     | 13.97                     | 3.82               | 17.79      | ≤ 30.00     |
| 802.11ax-HE80  | MCS0              | 55          | 6225        | 10.89                     | 10.98                     | 13.95                     | 3.82               | 17.77      | ≤ 30.00     |
| 802.11ax-HE80  | MCS0              | 87          | 6385        | 10.76                     | 11.02                     | 13.90                     | 3.82               | 17.72      | ≤ 30.00     |
| 802.11ax-HE80  | MCS0              | 135         | 6625        | 10.82                     | 11.47                     | 14.17                     | 3.68               | 17.85      | ≤ 30.00     |
| 802.11ax-HE80  | MCS0              | 151         | 6705        | 10.87                     | 11.45                     | 14.18                     | 3.68               | 17.86      | ≤ 30.00     |
| 802.11ax-HE80  | MCS0              | 167         | 6785        | 10.09                     | 11.72                     | 13.99                     | 3.68               | 17.67      | ≤ 30.00     |
| 802.11ax-HE160 | MCS0              | 15          | 6025        | 11.07                     | 11.96                     | 14.55                     | 3.82               | 18.37      | ≤ 30.00     |
| 802.11ax-HE160 | MCS0              | 47          | 6185        | 11.38                     | 11.31                     | 14.36                     | 3.82               | 18.18      | ≤ 30.00     |
| 802.11ax-HE160 | MCS0              | 79          | 6345        | 10.92                     | 11.43                     | 14.19                     | 3.82               | 18.01      | ≤ 30.00     |
| 802.11ax-HE160 | MCS0              | 111         | 6505        | 11.76                     | 12.59                     | 15.21                     | 3.74               | 18.95      | ≤ 30.00     |
| 802.11ax-HE160 | MCS0              | 143         | 6665        | 11.68                     | 12.47                     | 15.10                     | 3.68               | 18.78      | ≤ 30.00     |

Note 1: Total Average Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$ .

Note 2: EIRP (dBm) = Total Average Power (dBm) + Antenna Gain (dBi).

**Partial RU:**

|           |            |               |           |
|-----------|------------|---------------|-----------|
| Test Site | SIP-TR1    | Test Engineer | Ryan Wang |
| Test Date | 2025-02-25 |               |           |

| Test Mode     | Data Rate/<br>MCS | Channel No. | Freq. (MHz) | RU index  | Ant 0 Average Power (dBm) | Ant 1 Average Power (dBm) | Total Average Power (dBm) | Antenna Gain (dBi) | EIRP (dBm) | Limit (dBm) |
|---------------|-------------------|-------------|-------------|-----------|---------------------------|---------------------------|---------------------------|--------------------|------------|-------------|
| 802.11ax-HE20 | MCS0              | 1           | 5955        | RU26/0    | 1.17                      | 1.92                      | 4.57                      | 3.82               | 8.39       | ≤ 30.00     |
|               |                   |             |             | RU52/74   | 3.13                      | 3.93                      | 6.56                      | 3.82               | 10.38      | ≤ 30.00     |
|               |                   |             |             | RU106/106 | 6.97                      | 8.05                      | 10.55                     | 3.82               | 14.37      | ≤ 30.00     |
| 802.11ax-HE20 | MCS0              | 49          | 6195        | RU26/4    | 2.57                      | 3.18                      | 5.90                      | 3.82               | 9.72       | ≤ 30.00     |
|               |                   |             |             | RU52/75   | 3.92                      | 4.68                      | 7.33                      | 3.82               | 11.15      | ≤ 30.00     |
|               |                   |             |             | RU106/106 | 7.46                      | 7.86                      | 10.67                     | 3.82               | 14.49      | ≤ 30.00     |
| 802.11ax-HE20 | MCS0              | 93          | 6415        | RU26/8    | 0.68                      | 2.89                      | 4.93                      | 3.82               | 8.75       | ≤ 30.00     |
|               |                   |             |             | RU52/77   | 0.43                      | 2.65                      | 4.69                      | 3.82               | 8.51       | ≤ 30.00     |
|               |                   |             |             | RU106/107 | 7.42                      | 7.84                      | 10.65                     | 3.82               | 14.47      | ≤ 30.00     |
| 802.11ax-HE20 | MCS0              | 117         | 6535        | RU26/0    | 0.77                      | 2.84                      | 4.94                      | 3.68               | 8.62       | ≤ 30.00     |
|               |                   |             |             | RU52/74   | 2.89                      | 4.42                      | 6.73                      | 3.68               | 10.41      | ≤ 30.00     |
|               |                   |             |             | RU106/106 | 6.92                      | 7.91                      | 10.45                     | 3.68               | 14.13      | ≤ 30.00     |
| 802.11ax-HE20 | MCS0              | 149         | 6695        | RU26/4    | 1.24                      | 2.67                      | 5.02                      | 3.68               | 8.70       | ≤ 30.00     |
|               |                   |             |             | RU52/75   | 4.62                      | 5.37                      | 8.02                      | 3.68               | 11.70      | ≤ 30.00     |
|               |                   |             |             | RU106/106 | 7.43                      | 8.25                      | 10.87                     | 3.68               | 14.55      | ≤ 30.00     |
| 802.11ax-HE20 | MCS0              | 181         | 6855        | RU26/8    | -0.91                     | 1.13                      | 3.24                      | 3.68               | 6.92       | ≤ 30.00     |
|               |                   |             |             | RU52/77   | 4.36                      | 6.21                      | 8.39                      | 3.68               | 12.07      | ≤ 30.00     |
|               |                   |             |             | RU106/107 | 6.87                      | 8.82                      | 10.96                     | 3.68               | 14.64      | ≤ 30.00     |
| 802.11ax-HE40 | MCS0              | 3           | 5965        | RU242/122 | 7.46                      | 8.86                      | 11.23                     | 3.82               | 15.05      | ≤ 30.00     |
| 802.11ax-HE40 | MCS0              | 51          | 6205        | RU242/122 | 7.98                      | 8.25                      | 11.13                     | 3.82               | 14.95      | ≤ 30.00     |
| 802.11ax-HE40 | MCS0              | 91          | 6405        | RU242/123 | 8.48                      | 8.93                      | 11.72                     | 3.82               | 15.54      | ≤ 30.00     |
| 802.11ax-HE40 | MCS0              | 123         | 6565        | RU242/122 | 7.72                      | 8.90                      | 11.36                     | 3.68               | 15.04      | ≤ 30.00     |
| 802.11ax-HE40 | MCS0              | 147         | 6685        | RU242/122 | 7.03                      | 7.76                      | 10.42                     | 3.68               | 14.10      | ≤ 30.00     |
| 802.11ax-HE40 | MCS0              | 179         | 6845        | RU242/123 | 6.76                      | 8.62                      | 10.80                     | 3.68               | 14.48      | ≤ 30.00     |

| Test Mode      | Data Rate/MCS | Channel No. | Freq. (MHz) | RU index  | Ant 0 Average Power (dBm) | Ant 1 Average Power (dBm) | Total Average Power (dBm) | Antenna Gain (dBi) | EIRP (dBm) | Limit (dBm) |
|----------------|---------------|-------------|-------------|-----------|---------------------------|---------------------------|---------------------------|--------------------|------------|-------------|
| 802.11ax-HE80  | MCS0          | 7           | 5985        | RU484/130 | 7.57                      | 8.55                      | 11.10                     | 3.82               | 14.92      | ≤ 30.00     |
| 802.11ax-HE80  | MCS0          | 55          | 6225        | RU484/130 | 7.73                      | 8.18                      | 10.97                     | 3.82               | 14.79      | ≤ 30.00     |
| 802.11ax-HE80  | MCS0          | 87          | 6385        | RU484/131 | 8.31                      | 8.29                      | 11.31                     | 3.82               | 15.13      | ≤ 30.00     |
| 802.11ax-HE80  | MCS0          | 135         | 6625        | RU484/130 | 6.93                      | 8.56                      | 10.83                     | 3.68               | 14.51      | ≤ 30.00     |
| 802.11ax-HE80  | MCS0          | 151         | 6705        | RU484/130 | 7.69                      | 8.29                      | 11.01                     | 3.68               | 14.69      | ≤ 30.00     |
| 802.11ax-HE80  | MCS0          | 167         | 6785        | RU484/131 | 7.27                      | 9.08                      | 11.28                     | 3.68               | 14.96      | ≤ 30.00     |
| 802.11ax-HE160 | MCS0          | 15          | 6025        | RU996/134 | 8.45                      | 8.72                      | 11.60                     | 3.82               | 15.42      | ≤ 30.00     |
| 802.11ax-HE160 | MCS0          | 47          | 6185        | RU996/134 | 9.28                      | 9.02                      | 12.16                     | 3.82               | 15.98      | ≤ 30.00     |
| 802.11ax-HE160 | MCS0          | 79          | 6345        | RU996/135 | 8.57                      | 8.32                      | 11.46                     | 3.82               | 15.28      | ≤ 30.00     |
| 802.11ax-HE160 | MCS0          | 143         | 6665        | RU996/134 | 9.16                      | 9.78                      | 12.49                     | 3.68               | 16.17      | ≤ 30.00     |

Note 1: Total Average Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$ .

Note 2: EIRP (dBm) = Total Average Power (dBm) + Antenna Gain (dBi).

#### A.4 Power Spectral Density Test Result

##### Client operating under the control of an indoor access point

Full RU:

|           |                         |               |           |
|-----------|-------------------------|---------------|-----------|
| Test Site | SIP-TR1                 | Test Engineer | Ryan Wang |
| Test Date | 2025-01-07 ~ 2025-01-08 |               |           |

| Test Mode     | Data Rate/<br>MCS | Channel No. | Freq. (MHz) | Ant 0 PSD (dBm/MHz) | Ant 1 PSD (dBm/MHz) | Duty Cycle (%) | Antenna Gain (dBi) | EIRP PSD (dBm/MHz) | Limit (dBm/MHz) |
|---------------|-------------------|-------------|-------------|---------------------|---------------------|----------------|--------------------|--------------------|-----------------|
| 802.11ax-HE20 | MCS0              | 1           | 5955        | -11.315             | -10.617             | 99.58          | 6.83               | -1.112             | ≤ -1.00         |
| 802.11ax-HE20 | MCS0              | 49          | 6195        | -11.463             | -11.126             | 99.58          | 6.83               | -1.451             | ≤ -1.00         |
| 802.11ax-HE20 | MCS0              | 93          | 6415        | -12.423             | -10.633             | 99.58          | 6.83               | -1.596             | ≤ -1.00         |
| 802.11ax-HE20 | MCS0              | 97          | 6435        | -11.735             | -10.249             | 99.58          | 6.75               | -1.168             | ≤ -1.00         |
| 802.11ax-HE20 | MCS0              | 105         | 6475        | -11.819             | -10.085             | 99.58          | 6.75               | -1.106             | ≤ -1.00         |
| 802.11ax-HE20 | MCS0              | 113         | 6515        | -11.735             | -10.143             | 99.58          | 6.75               | -1.106             | ≤ -1.00         |
| 802.11ax-HE20 | MCS0              | 117         | 6535        | -11.949             | -10.271             | 99.58          | 6.69               | -1.329             | ≤ -1.00         |
| 802.11ax-HE20 | MCS0              | 149         | 6695        | -11.927             | -10.364             | 99.58          | 6.69               | -1.375             | ≤ -1.00         |
| 802.11ax-HE20 | MCS0              | 181         | 6855        | -13.141             | -11.125             | 99.58          | 6.69               | -2.317             | ≤ -1.00         |
| 802.11ax-HE20 | MCS0              | 185         | 6875        | -13.245             | -11.174             | 99.58          | 6.73               | -2.347             | ≤ -1.00         |
| 802.11ax-HE20 | MCS0              | 189         | 6895        | -13.194             | -11.771             | 99.58          | 6.73               | -2.684             | ≤ -1.00         |
| 802.11ax-HE20 | MCS0              | 209         | 6995        | -13.706             | -12.109             | 99.58          | 6.73               | -3.094             | ≤ -1.00         |
| 802.11ax-HE20 | MCS0              | 229         | 7095        | -13.134             | -10.884             | 99.58          | 6.73               | -2.125             | ≤ -1.00         |
| 802.11ax-HE20 | MCS0              | 233         | 7115        | -13.181             | -11.015             | 99.58          | 6.73               | -2.224             | ≤ -1.00         |
| 802.11ax-HE40 | MCS0              | 3           | 5965        | -11.895             | -11.268             | 99.52          | 6.83               | -1.730             | ≤ -1.00         |
| 802.11ax-HE40 | MCS0              | 51          | 6205        | -11.597             | -11.402             | 99.52          | 6.83               | -1.658             | ≤ -1.00         |
| 802.11ax-HE40 | MCS0              | 91          | 6405        | -12.557             | -11.073             | 99.52          | 6.83               | -1.912             | ≤ -1.00         |
| 802.11ax-HE40 | MCS0              | 99          | 6445        | -12.705             | -11.039             | 99.52          | 6.75               | -2.032             | ≤ -1.00         |
| 802.11ax-HE40 | MCS0              | 107         | 6485        | -13.181             | -12.053             | 99.52          | 6.75               | -2.820             | ≤ -1.00         |
| 802.11ax-HE40 | MCS0              | 115         | 6525        | -13.034             | -11.156             | 99.52          | 6.75               | -2.234             | ≤ -1.00         |
| 802.11ax-HE40 | MCS0              | 123         | 6565        | -11.453             | -10.320             | 99.52          | 6.69               | -1.149             | ≤ -1.00         |
| 802.11ax-HE40 | MCS0              | 147         | 6685        | -11.796             | -10.768             | 99.52          | 6.69               | -1.551             | ≤ -1.00         |
| 802.11ax-HE40 | MCS0              | 179         | 6845        | -12.290             | -10.360             | 99.52          | 6.69               | -1.518             | ≤ -1.00         |
| 802.11ax-HE40 | MCS0              | 187         | 6885        | -12.280             | -10.712             | 99.52          | 6.73               | -1.685             | ≤ -1.00         |
| 802.11ax-HE40 | MCS0              | 195         | 6925        | -11.912             | -10.584             | 99.52          | 6.73               | -1.457             | ≤ -1.00         |
| 802.11ax-HE40 | MCS0              | 211         | 7005        | -11.892             | -10.649             | 99.52          | 6.73               | -1.486             | ≤ -1.00         |
| 802.11ax-HE40 | MCS0              | 227         | 7085        | -12.693             | -10.073             | 99.52          | 6.73               | -1.448             | ≤ -1.00         |

| Test Mode      | Data Rate/MCS | Channel No. | Freq. (MHz) | Ant 0 PSD (dBm/MHz) | Ant 1 PSD (dBm/MHz) | Duty Cycle (%) | Antenna Gain (dBi) | EIRP PSD (dBm/MHz) | Limit (dBm/MHz) |
|----------------|---------------|-------------|-------------|---------------------|---------------------|----------------|--------------------|--------------------|-----------------|
| 802.11ax-HE80  | MCS0          | 7           | 5985        | -11.957             | -10.503             | 99.22          | 6.83               | -1.329             | ≤ -1.00         |
| 802.11ax-HE80  | MCS0          | 55          | 6225        | -11.615             | -11.276             | 99.22          | 6.83               | -1.602             | ≤ -1.00         |
| 802.11ax-HE80  | MCS0          | 87          | 6385        | -11.658             | -11.090             | 99.22          | 6.83               | -1.524             | ≤ -1.00         |
| 802.11ax-HE80  | MCS0          | 103         | 6465        | -11.673             | -10.682             | 99.22          | 6.75               | -1.389             | ≤ -1.00         |
| 802.11ax-HE80  | MCS0          | 119         | 6545        | -11.427             | -10.521             | 99.22          | 6.75               | -1.190             | ≤ -1.00         |
| 802.11ax-HE80  | MCS0          | 135         | 6625        | -11.918             | -10.824             | 99.22          | 6.69               | -1.636             | ≤ -1.00         |
| 802.11ax-HE80  | MCS0          | 151         | 6705        | -11.435             | -10.590             | 99.22          | 6.69               | -1.292             | ≤ -1.00         |
| 802.11ax-HE80  | MCS0          | 167         | 6785        | -12.281             | -10.182             | 99.22          | 6.69               | -1.406             | ≤ -1.00         |
| 802.11ax-HE80  | MCS0          | 183         | 6865        | -11.887             | -9.942              | 99.22          | 6.69               | -1.106             | ≤ -1.00         |
| 802.11ax-HE80  | MCS0          | 199         | 6945        | -11.386             | -10.685             | 99.22          | 6.73               | -1.281             | ≤ -1.00         |
| 802.11ax-HE80  | MCS0          | 215         | 7025        | -12.118             | -10.030             | 99.22          | 6.73               | -1.209             | ≤ -1.00         |
| 802.11ax-HE160 | MCS0          | 15          | 6025        | -11.718             | -11.266             | 99.10          | 6.83               | -1.646             | ≤ -1.00         |
| 802.11ax-HE160 | MCS0          | 47          | 6185        | -11.470             | -11.174             | 99.10          | 6.83               | -1.479             | ≤ -1.00         |
| 802.11ax-HE160 | MCS0          | 79          | 6345        | -11.390             | -10.930             | 99.10          | 6.83               | -1.314             | ≤ -1.00         |
| 802.11ax-HE160 | MCS0          | 111         | 6505        | -11.694             | -10.599             | 99.10          | 6.75               | -1.352             | ≤ -1.00         |
| 802.11ax-HE160 | MCS0          | 143         | 6665        | -11.852             | -10.832             | 99.10          | 6.69               | -1.612             | ≤ -1.00         |
| 802.11ax-HE160 | MCS0          | 175         | 6825        | -11.464             | -10.207             | 99.10          | 6.69               | -1.090             | ≤ -1.00         |
| 802.11ax-HE160 | MCS0          | 207         | 6985        | -11.659             | -10.837             | 99.10          | 6.73               | -1.488             | ≤ -1.00         |


Note: When EUT duty cycle > 98%, EIRP PSD (dBm/MHz) =  $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$  (dBm/MHz) + Antenna Gain (dBi).

## 802.11ax-HE20 Power Spectral Density- Ant 0


Channel 1 (5955MHz)




Channel 49 (6195MHz)

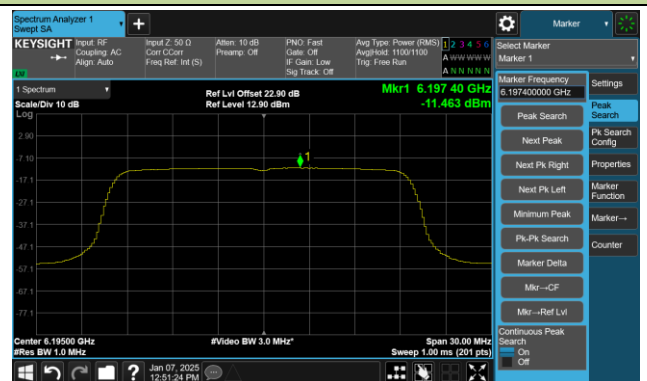


Channel 93 (6415MHz)

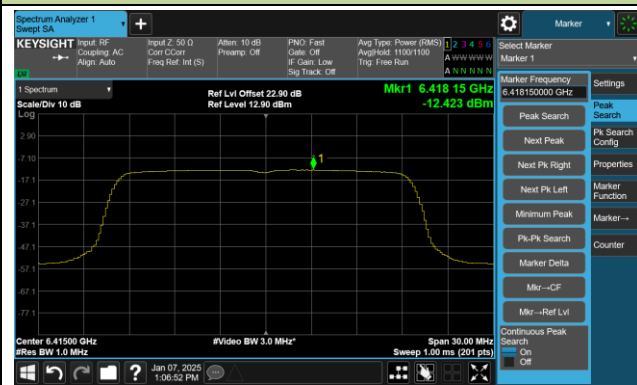

Channel 97 (6435MHz)

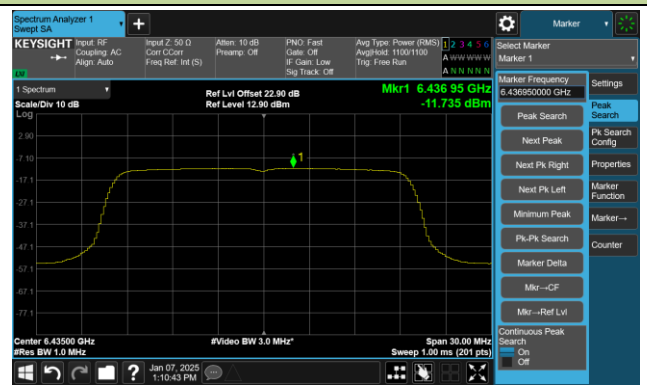


Channel 105 (6475MHz)

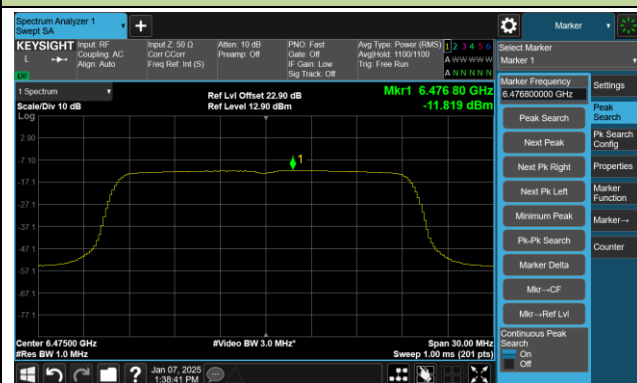

Channel 113 (6515MHz)



Channel 117 (6535MHz)

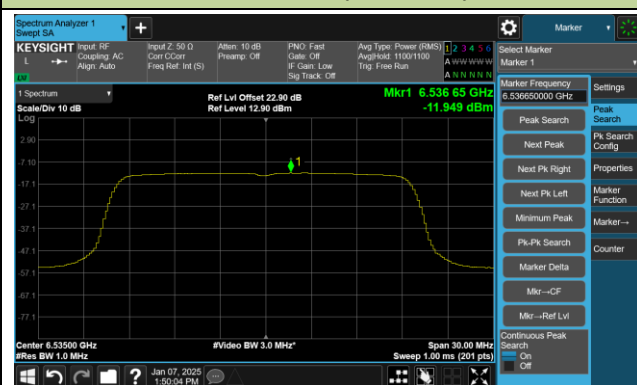


Channel 149 (6695MHz)




## 802.11ax-HE20 Power Spectral Density- Ant 0


## Channel 181 (6855MHz)

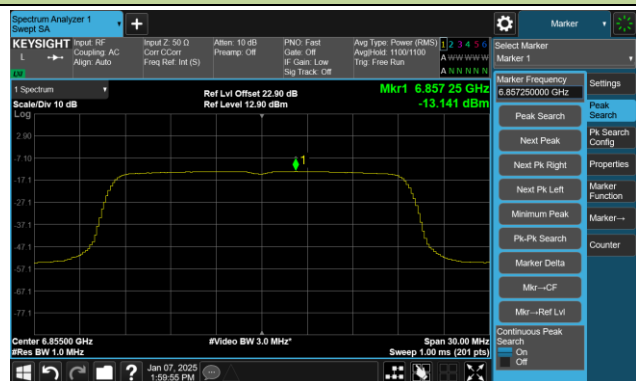


## Channel 185 (6875MHz)

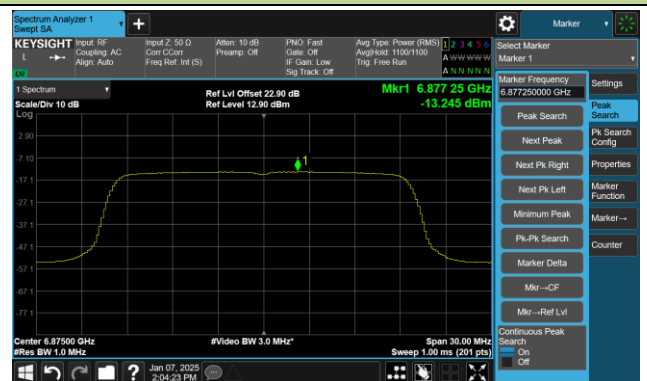

## Channel 189 (6895MHz)

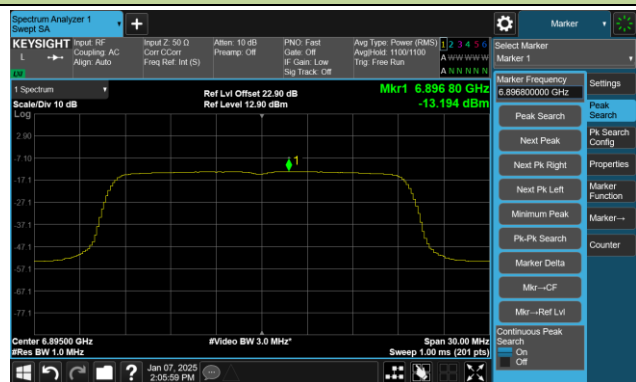


## Channel 209 (6995MHz)

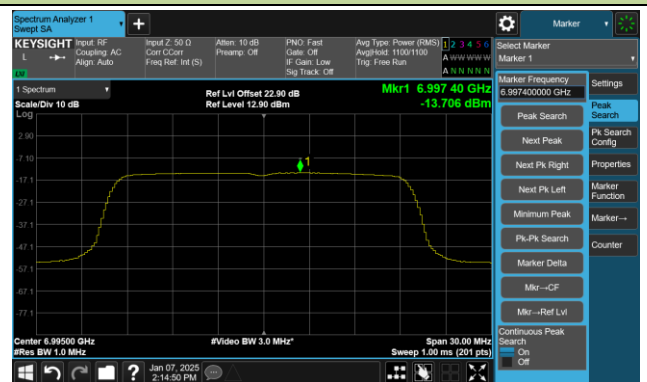

## Channel 229 (7095MHz)



## Channel 233 (7115MHz)

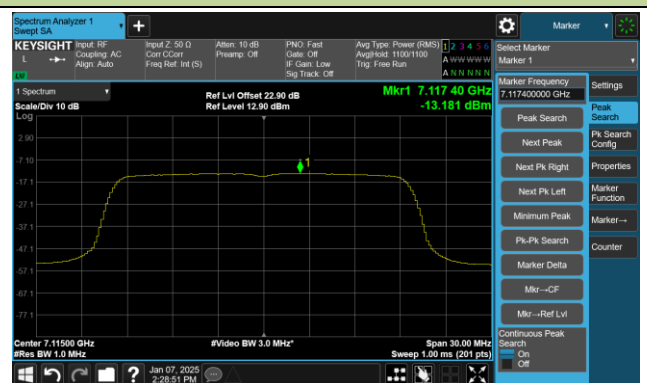


## 802.11ax-HE40 Power Spectral Density- Ant 0

Channel 3 (5965MHz)




Channel 51 (6205MHz)

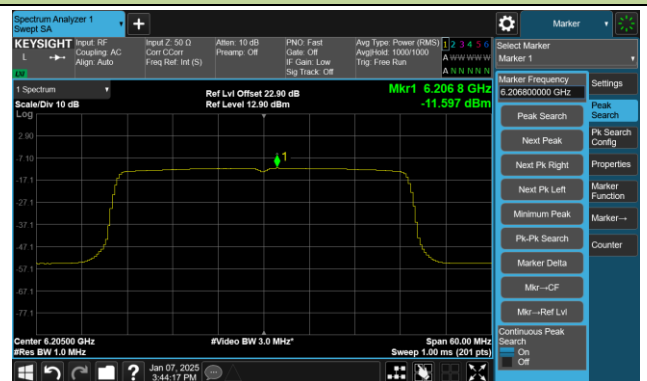


Channel 91 (6405MHz)




Channel 99 (6445MHz)

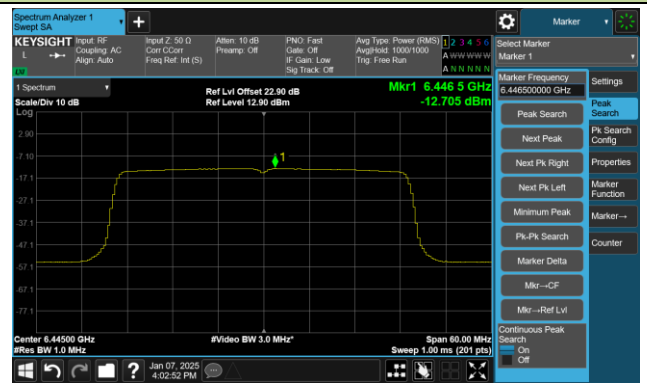

Channel 107 (6485MHz)

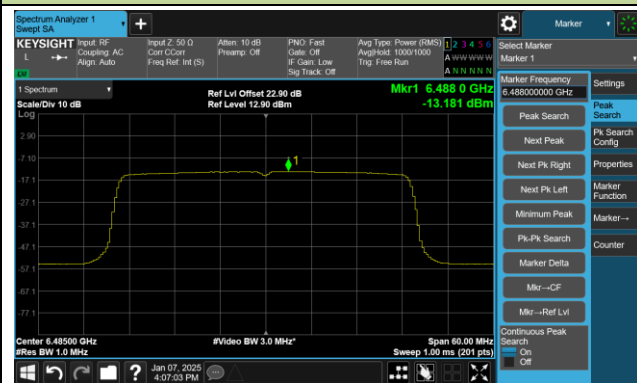


Channel 115 (6525MHz)

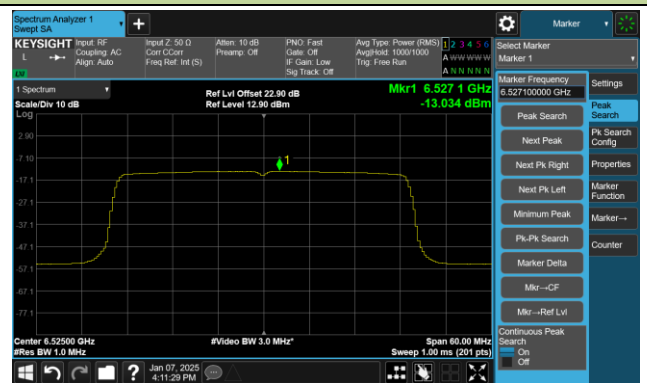

Channel 123 (6565MHz)




Channel 147 (6685MHz)

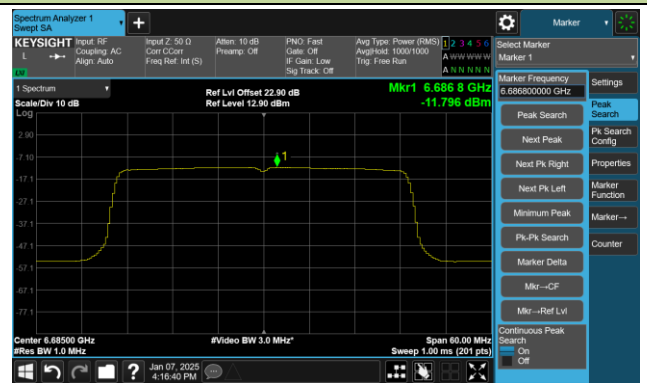


## 802.11ax-HE40 Power Spectral Density- Ant 0


## Channel 179 (6845MHz)

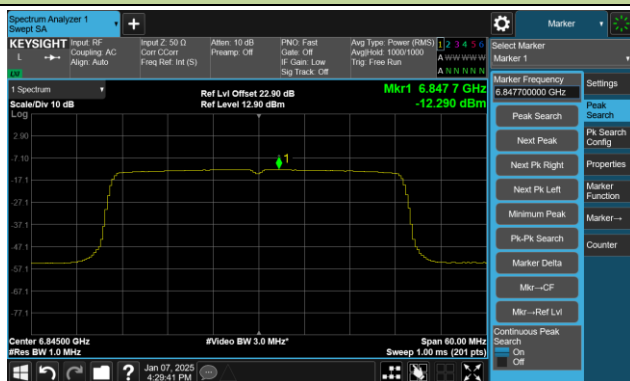


## Channel 187 (6885MHz)

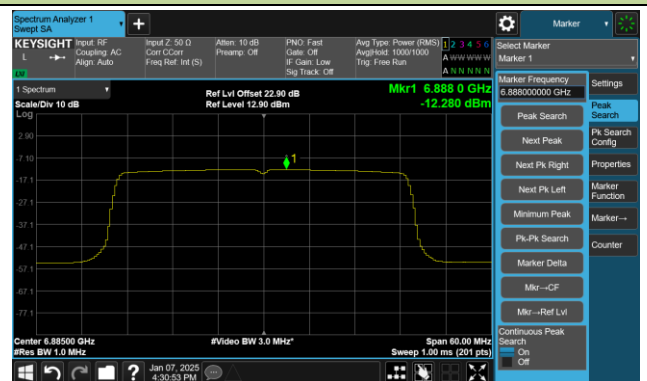


## Channel 195 (6925MHz)

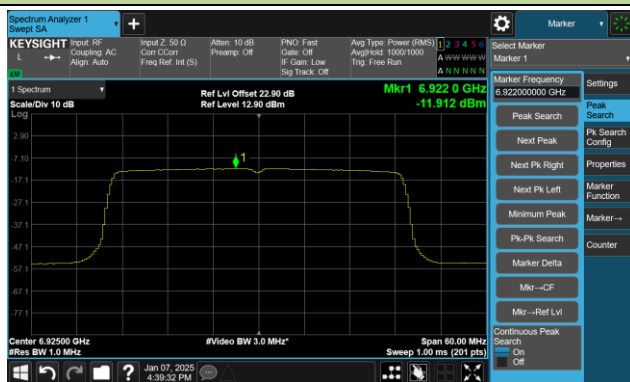

## Channel 211 (7005MHz)

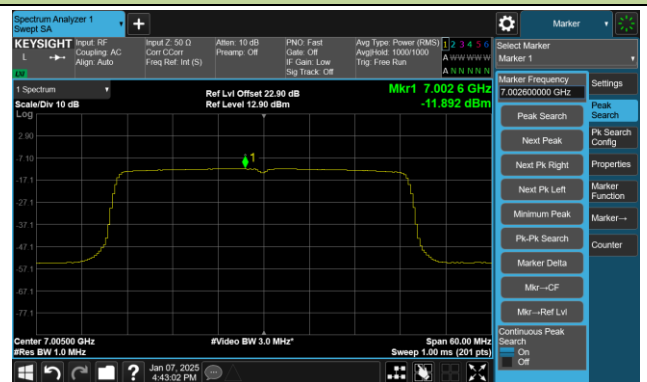


## Channel 227 (7085MHz)

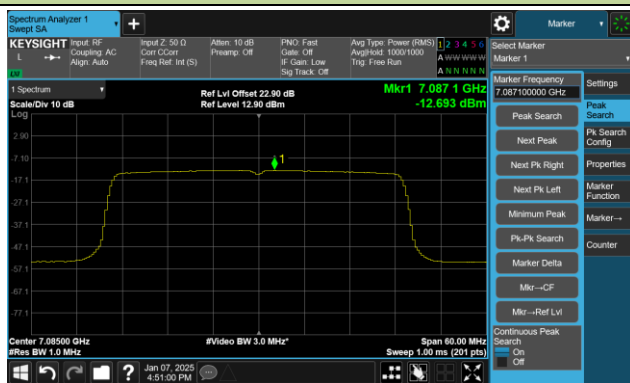


## 802.11ax-HE80 Power Spectral Density- Ant 0

Channel 7 (5985MHz)

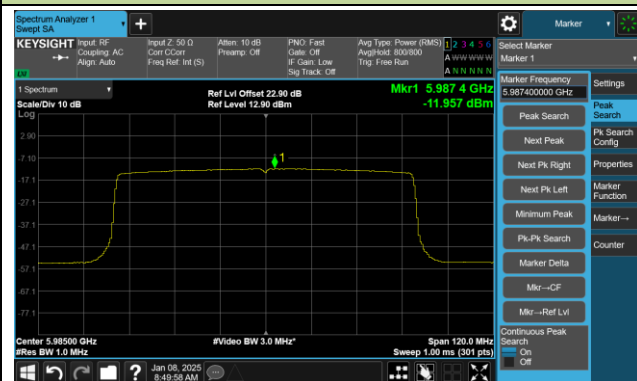


Channel 55 (6225MHz)

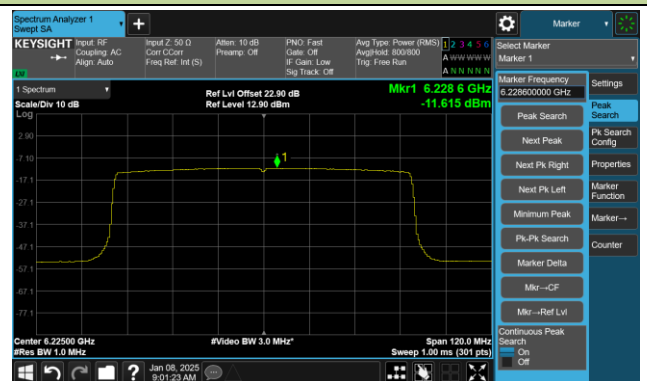


Channel 87 (6385MHz)




Channel 103 (6465MHz)

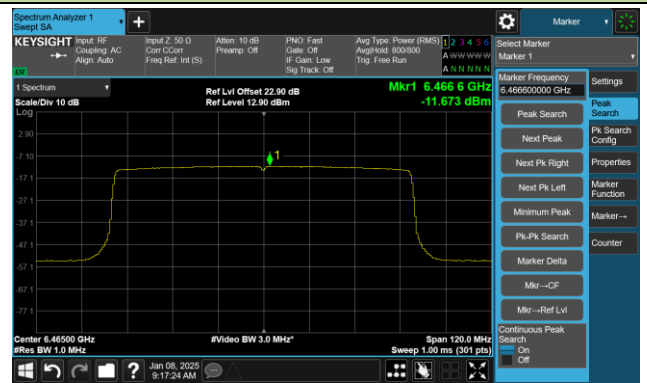


Channel 119 (6545MHz)

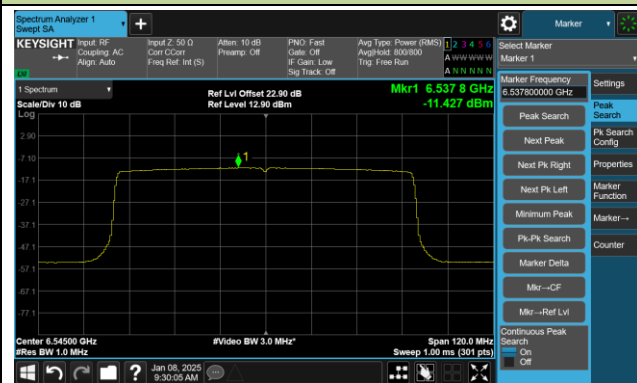


Channel 135 (6625MHz)

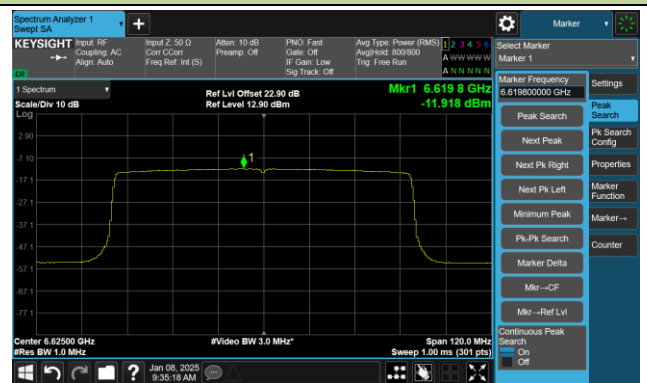

Channel 151 (6705MHz)

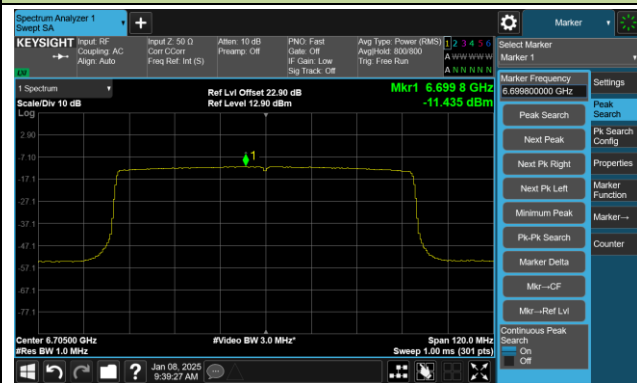


Channel 167 (6785MHz)

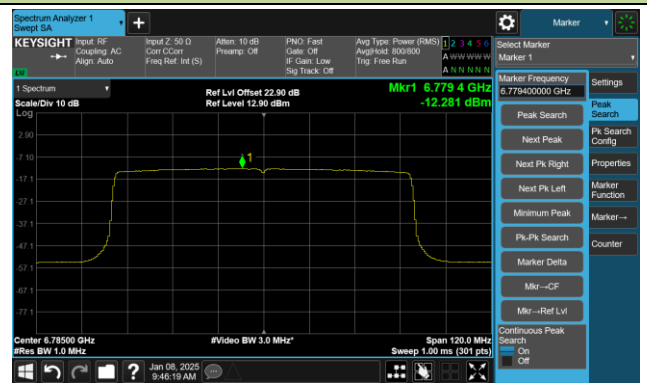


## 802.11ax-HE80 Power Spectral Density- Ant 0


## Channel 183 (6865MHz)

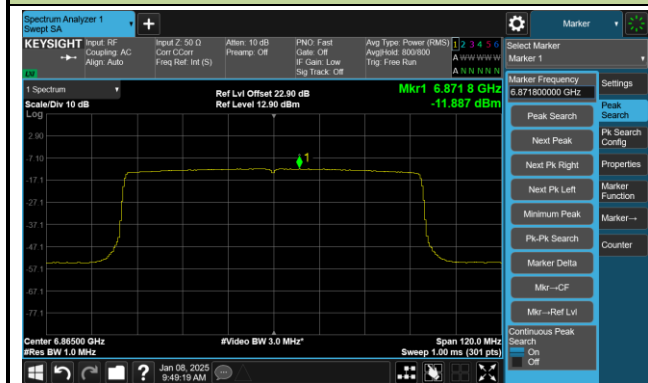

## Channel 199 (6945MHz)

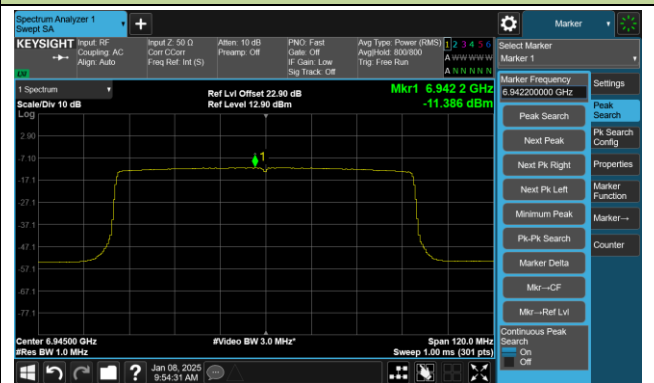


## Channel 215 (7025MHz)

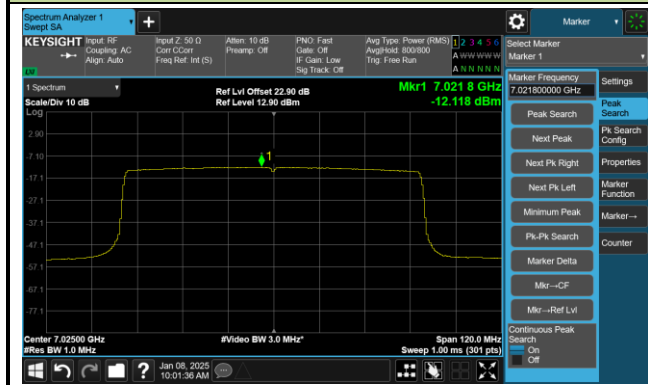


# 802.11ax-HE160 Power Spectral Density- Ant 0


## Channel 15 (6025MHz)

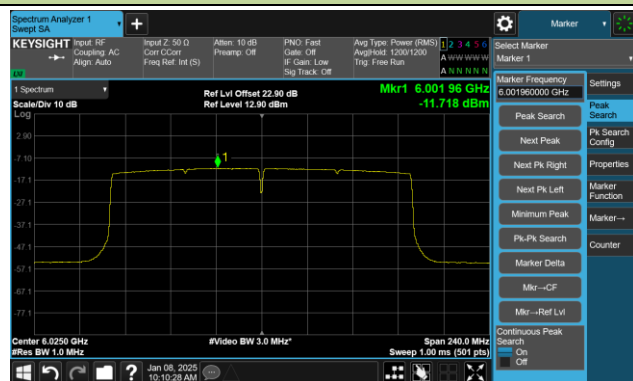


## Channel 47 (6185MHz)

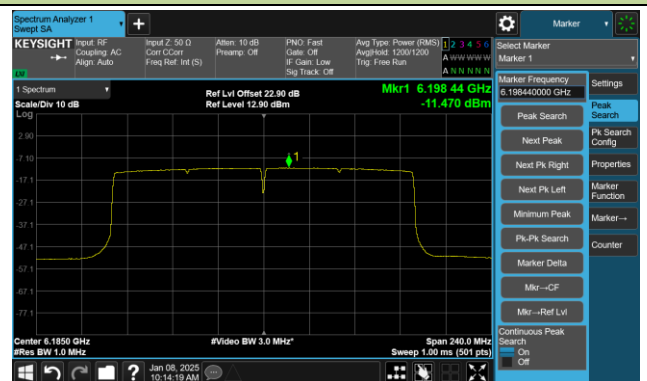


## Channel 79 (6345MHz)

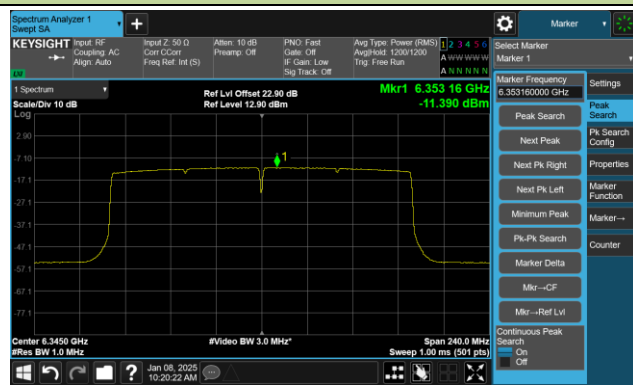

## Channel 111 (6505MHz)

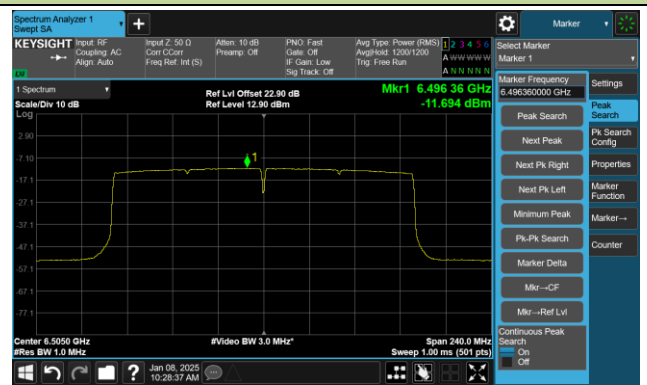


## Channel 143 (6665MHz)

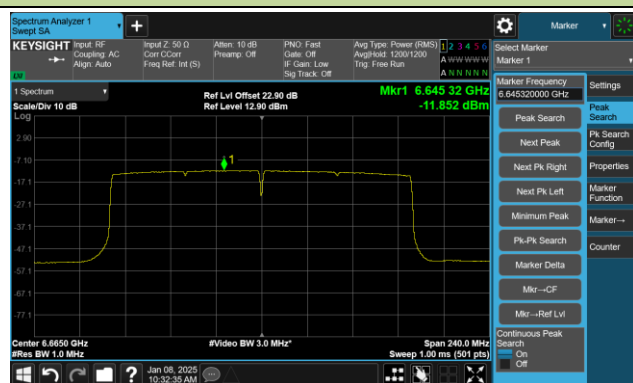

## Channel 175 (6825MHz)




## Channel 207 (6985MHz)

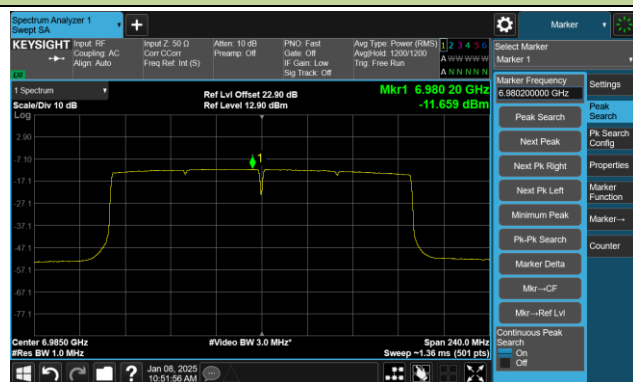


## 802.11ax-HE20 Power Spectral Density- Ant 1

Channel 1 (5955MHz)

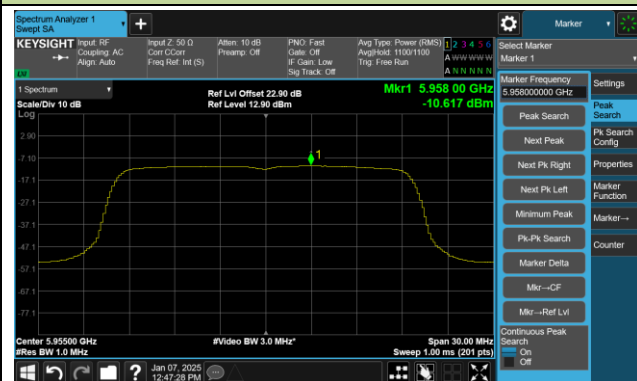

Channel 49 (6195MHz)

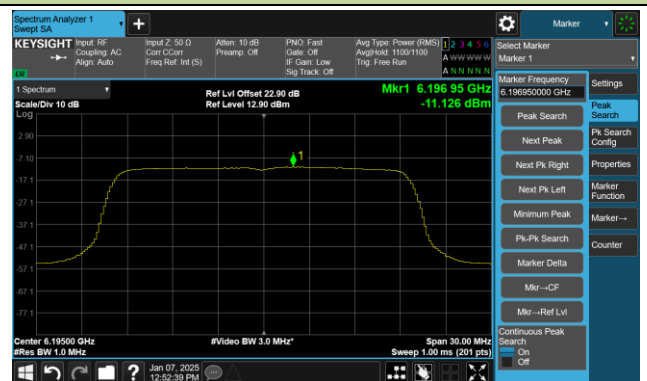


Channel 93 (6415MHz)



Channel 97 (6435MHz)



Channel 105 (6475MHz)

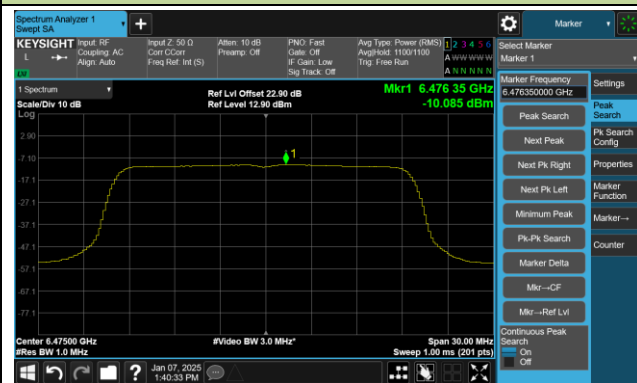

Channel 113 (6515MHz)



Channel 117 (6535MHz)



Channel 149 (6695MHz)




## 802.11ax-HE20 Power Spectral Density- Ant 1


## Channel 181 (6855MHz)




## Channel 185 (6875MHz)

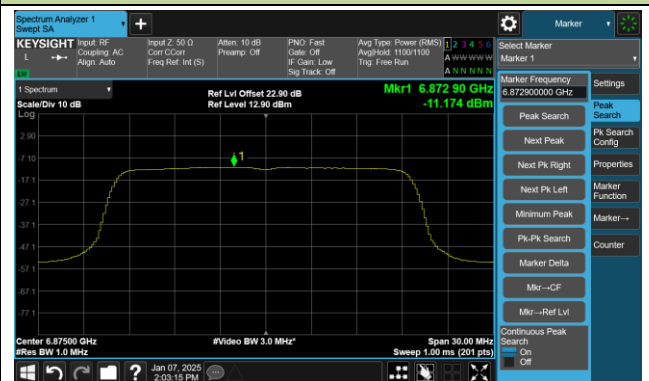

## Channel 189 (6895MHz)

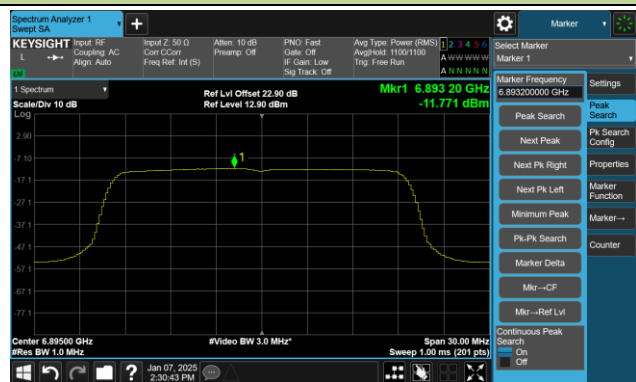


## Channel 209 (6995MHz)

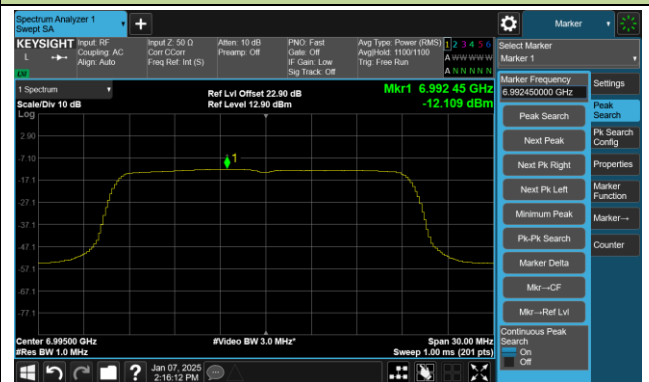

## Channel 229 (7095MHz)




## Channel 233 (7115MHz)

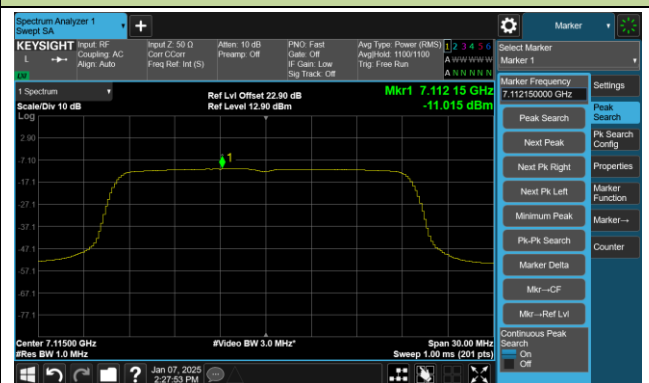


## 802.11ax-HE40 Power Spectral Density- Ant 1


Channel 3 (5965MHz)

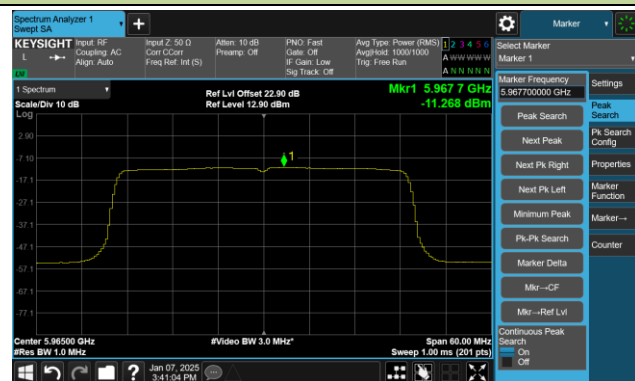


Channel 51 (6205MHz)

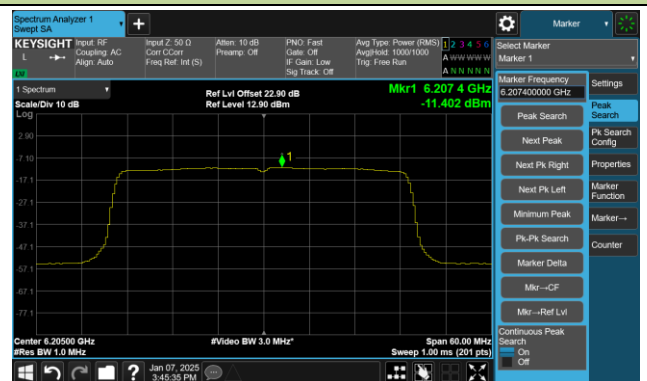


Channel 91 (6405MHz)

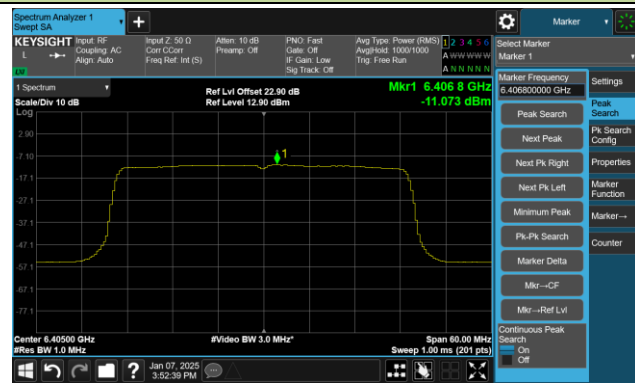


Channel 99 (6445MHz)

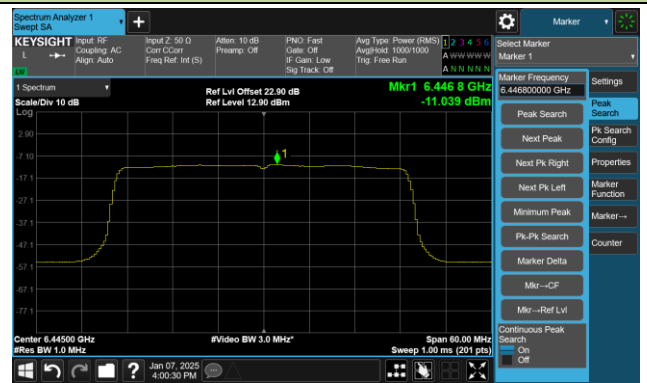


Channel 107 (6485MHz)

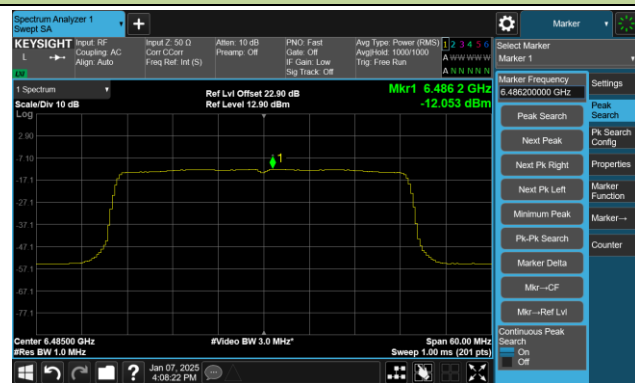

Channel 115 (6525MHz)

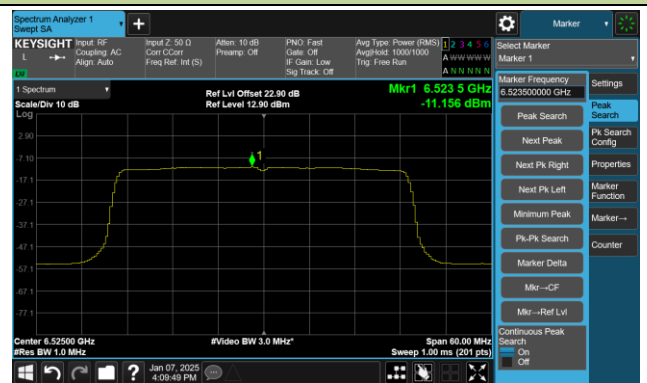

Channel 123 (6565MHz)

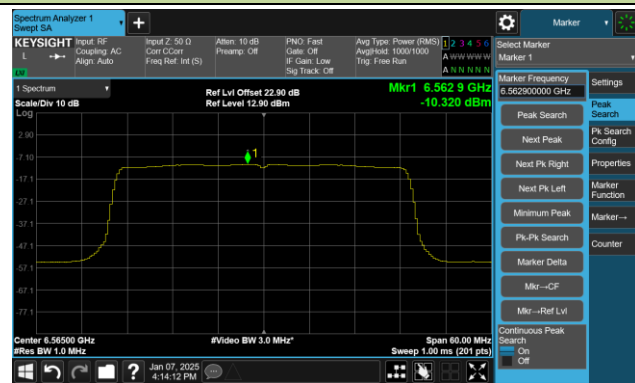

Channel 147 (6685MHz)

