



Radio Test Report

Application for a Class II Permissive Change of Equipment Authorization

FCC Part 24 & IC RSS-133
1930MHz – 1990MHz

FCC ID: VBNFXFC-01
IC: 661W-FXFC

Product Name: Flexi Multiradio BTS
Model(s): FXFC

APPLICANT: Nokia Solutions and Networks
6000 Connection Drive
Irving, TX 75039


TEST SITE(S): National Technical Systems - Plano
1701 E Plano Pkwy #150
Plano, TX 75074

REPORT DATE: March 31st, 2016

FINAL TEST DATES: March 25th


TOTAL NUMBER OF PAGES: 138

Prepared By:




Armando Del Angel
EMI Supervisor

Approved By:



Kimberly Zavala
Quality Assurance Manager

Reviewed By:



John Ngo
General Manager

This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full.

REVISION HISTORY

Rev#	Date	Comments	Modified By
0	3/31/16	Draft	Armando Del Angel
1	4/27/16	Changes due to customer comments	Armando Del Angel

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE.....	4
OBJECTIVE.....	5
STATEMENT OF COMPLIANCE	5
DEVIATIONS FROM THE STANDARDS	5
TEST RESULTS.....	6
FCC PART 24 & IC RSS-133 (BASE STATIONS OPERATING IN 1930MHZ-1995MHZ BAND)	6
EXTREME CONDITIONS	8
MEASUREMENT UNCERTAINTIES	8
EQUIPMENT UNDER TEST (EUT) DETAILS	9
GENERAL.....	9
ENCLOSURE	11
AUXILLARY EQUIPMENT	11
SUPPORT EQUIPMENT	11
EUT INTERFACE PORTS.....	11
EUT OPERATION	12
EUT FIRMWARE/SOFTWARE.....	12
MODIFICATIONS	12
TESTING	13
GENERAL INFORMATION	13
MEASUREMENT PROCEDURES	14
TEST EQUIPMENT	16
APPENDIX A TEST DATA	17
RF OUTPUT POWER	18
EMISSION BANDWIDTHS (26dB AND 99%)	60
ANTENNA PORT CONDUCTED BANDEDGE	73
TRANSMITTER ANTENNA PORT CONDUCTED SPURIOUS EMISSIONS	113
TRANSMITTER RADIATED SPURIOUS EMISSIONS	132
FREQUENCY STABILITY	ERROR! BOOKMARK NOT DEFINED.
END OF REPORT.....	136

SCOPE

Tests have been performed on Nokia Solutions and Networks product Flexi Multiradio BTS RFM (Radio Frequency Module) Model FXFC, pursuant to the relevant requirements of the following standard(s) in order to obtain a class II permissive change certification against the regulatory requirements of the Federal Communications Commission and Industry Canada.

- Code of Federal Regulations (CFR) Title 47 Part 2
- Industry Canada RSS-Gen Issue 4, November 2014
- CFR 47 Part 24 Subpart E – Broadband PCS
- RSS-133 Issue 6, January 2013 (2GHz Personal Communications Services)

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards:

ANSI C63.4-2009
ANSI TIA-603-C
FCC KDB 971168 D01 v02r02

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC and Industry Canada performance and procedural standards.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of Nokia Solutions and Networks product Flexi Multiradio BTS RFM Model FXFC and therefore apply only to the tested sample. The sample was selected and prepared by Hobert Smith of Nokia Solutions and Networks.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section. The Testing was performed in order to obtain a Class II permissive change to add LTE modulation Types.

Prior to marketing in the USA, the device requires certification. Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

Testing was performed only on Model FXFC. No additional models were described or supplied for testing.

STATEMENT OF COMPLIANCE

The tested sample of Nokia Solutions and Networks product Flexi Multiradio BTS RFM Model FXFC complied with the requirements of the standards and frequency bands declared in the scope of this test report.

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS**FCC Part 24 & IC RSS-133 (Base Stations Operating in 1930MHz-1990MHz band)**

FCC	Canada	Description	Measured	Limit	Result
Transmitter Modulation, output power and other characteristics					
§24.229	RSS-133 Section 6.1	Frequency range(s)	1930.7-1989.3 (1.4M-LTE) 1931.5-1988.5 (3M-LTE) 1932.5-1987.5 (5M-LTE) 1935-1985 (10M-LTE) 1937.5-1982.5 (15M-LTE) 1940-1980 (20M-LTE)	1930-1995 MHz	Pass
§2.1047	RSS-133 Section 6.2	Modulation Type	QPSK, 16QAM, 64QAM (1.4M, 3M, 5M, 10M, 15M, 20M for each)	Digital	Pass
§24.232	RSS-133 Section 6.4	Output Power	Conducted Output Power (Highest on Port 5) RMS: 49.19dBm ERP will depend on antenna gain (unknown)	FCC: 1640W EIRP IC: 100W	Pass
§24.232	RSS-133 Section 6.4	Peak to Average Ratio	10.16dB highest	<= 13 dB	Pass
§24.238	-	Emission Bandwidth (26dB)	1.283MHz (1.4M-LTE) 2.929MHz (3M-LTE) 4.864MHz (5M-LTE) 9.743MHz (10M-LTE) 14.588MHz (15M-LTE) 19.430MHz (20M-LTE)	Remain in Block	Pass
-	RSS-133 Section 2.3	Emission Bandwidth (99%)	1.120MHz (1.4M-LTE) 2.714MHz (3M-LTE) 4.502MHz (5M-LTE) 9.001MHz (10M-LTE) 13.506MHz (15M-LTE) 18.013MHz (20M-LTE)	Remain in Block	Pass
Transmitter spurious emissions ³					
§24.238	RSS-133 Section 6.5.1	At the antenna terminals	< -19.03dBm	-19.03 dBm (per TX chain)	Pass
		Field strength	46.61dBuV/m at 3m Eq. to -48.59dBm EIRP	-13 dBm EIRP	Pass
Other details					
§24.235	RSS-133 Section 6.3	Frequency stability	Stays within block	N/A ¹	Pass ²
§2.1093	RSS-102	RF Exposure	N/A		Pass ⁴
Notes					
Note 1 – The requirement for frequency stability is that the signal remains within the authorized frequency block.					
Note 2 – Not Required per TCB guidance. Testing Performed in the original FXFC Certification.					
Note 3 – The measurement at the channel edge is made with a resolution bandwidth of at least 1% of the emission bandwidth. For measurements more than 1MHz from the edge of the channel, the measurement bandwidth is 1MHz.					
Note 4 – Applicant’s declaration on a separate exhibit based on hypothetical antenna gains.					

	Emission Designators					
	LTE-QPSK		LTE-16QAM		LTE-64QAM	
	FCC	IC	FCC	IC	FCC	IC
1.4M	1M29F9W	1M12F9W	1M27F9W	1M12F9W	1M26F9W	1M12F9W
3M	2M93F9W	2M71F9W	2M93F9W	2M71F9W	2M92F9W	2M72F9W
5M	4M87F9W	4M50F9W	4M85F9W	4M49F9W	4M86F9W	4M51F9W
10M	9M71F9W	9M00F9W	9M69F9W	9M01F9W	9M75	8M99F9W
15M	14M55F9W	13M49F9W	14M51F9W	13M51F9W	14M59F9W	13M48F9W
20M	19M43F9W	17M96F9W	19M33F9W	18M02F9W	19M41F9W	17M96F9W

Note: FCC based on 26dB emissions bandwidth, IC based on 99% emissions bandwidth

EXTREME CONDITIONS

Frequency stability is determined over extremes of temperature and voltage. The extremes of voltage were 85 to 115 percent of the nominal value.

Extreme Temperature was not tested per TCB Guidance. Testing for frequency stability was performed in the original FXFC certification.

MEASUREMENT UNCERTAINTIES

Measurement uncertainties of the test facility based on a 95% confidence level are as follows,

Test	Uncertainty
Radio frequency	$\pm 0.2\text{ppm}$
RF power conducted	$\pm 1.2\text{ dB}$
RF power radiated	$\pm 3.3\text{ dB}$
RF power density conducted	$\pm 1.2\text{ dB}$
Spurious emissions conducted	$\pm 1.2\text{ dB}$
Adjacent channel power	$\pm 0.4\text{ dB}$
Spurious emissions radiated	$\pm 4\text{ dB}$
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 1.6\%$
Voltage (DC)	$\pm 0.2\%$
Voltage (AC)	$\pm 0.3\%$

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The equipment under test is a Nokia Solutions and Networks Flexi Multiradio BTS (base transceiver station) Radio Frequency Module (RFM), model FXFC, which operates over 3GPP frequency band 2 (BTS Transmit: 1930-1990MHz). The FXFC has three co-located transmitters, with the option of being operated in a 4X4 MIMO configuration; with each transmit port supporting 80 watts maximum rated RF output power. The FXFC can be operated as MIMO or as non-MIMO. Multi-carrier operation is supported.

The FXFC is multi-standard capable (GSM/EDGE/WCDMA/LTE), but for this effort only the LTE mode will be tested. The FXFC supports three downlink modulation types for LTE (QPSK, 16QAM and 64QAM). The FXFC supports six LTE channel bandwidths (1.4, 3, 5, 10, 15, and 20 MHz). FXFC radio certification testing is required because of added LTE bandwidths from the original certification testing.

FXFC has external interfaces including DC power, ground, antennas (TX/RX), RX monitor, EAC (external alarm), optical (OBSAI) and remote electrical tilt (RET). The RFM with applicable installation kits may be pole or wall mounted.

The FXFC channel numbers and frequencies are as follows:

	Downlink EARFCN Band 2	Downlink Frequency (MHz)	LTE Channel Bandwidth					
			1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz
Band 2 (Ant 1, 3, 5)	600	1930.0	Bandedge	Bandedge	Bandedge	Bandedge	Bandedge	Bandedge
							
	607	1930.7	Bottom Ch					
							
	615	1931.5		Bottom Ch				
							
	625	1932.5			Bottom Ch			
							
	650	1935.0				Bottom Ch		
							
	675	1937.5					Bottom Ch	
							
	700	1940.0						Bottom Ch
							
	925	1962.5	Middle Ch	Middle Ch	Middle Ch	Middle Ch	Middle Ch	Middle Ch
							
	1100	1980.0						Top Channel
							
	1125	1982.5					Top Channel	
							
	1150	1985.0				Top Channel		
							
	1175	1987.5			Top Channel			
							
	1185	1988.5		Top Channel				
							
	1193	1989.3	Top Channel					
							
	1200	1990.0	Bandedge	Bandedge	Bandedge	Bandedge	Bandedge	Bandedge

Table 1 FXFC Downlink Band Edge LTE Frequency Channels

The sample was received on February 29th 2016 and tested on March 1st – March 25th, 2016. The EUT consisted of the following component(s):

Company	Model	Description	Serial/Part Number	FCC ID / IC#
Nokia Solutions and Networks	FXFC	Flexi Multiradio BTS RFM	Part# 472679A.101 Serial# 1M152245671	FCC ID: VBNFXFC-01 IC: 661W-FXFC

ENCLOSURE

The EUT enclosure is made of heavy duty aluminum and measures approximately 447(W) x 422(D) x 133(H) mm.

AUXILIARY EQUIPMENT

Company	Model	Description	Serial/Part Number	FCC ID
Nokia Solutions and Networks	FOSH	SFP Optical Module (Plugs into RFM Opt Ports 1, 2 & 3)	Part#: 472579A.101 (3 units per RFM) Serial#: FR151400271, FR151400272, and FR151400275	N/A

SUPPORT EQUIPMENT

Company	Model	Description	Serial Number	FCC ID
Nokia Solutions and Networks	FSMF	Flexi System Module	Part#: 472181A.103	N/A
Nokia Solutions and Networks	FBBC	Baseband Extension Module	Part#: 472797A.101 (2 units per FSMF)	N/A
HP	Elite Book 6930p	Laptop PC	N/A	N/A

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

Cable	Type	Shield	Length	Used in Test	Quantity	Termination
Power Input	Power	No	~ 3 m	Yes	1	Power Supply
Earth	Earth	No	~ 1 m	Yes	1	Lab earth ground
Antenna	RF	Yes	~ 3 m	Yes	3	50Ω Load
Multimode Optical	Optical	No	>6 m	Yes	3	System Module

The connector layout for FXFC is provided below:



FXFC External Interfaces:

Name	Qty	Connector Type	Purpose (and Description)
DC In	1	Screw Terminal	Power Input -48 VDC
GND	1	Screw lug (2xM5)	Ground
ANT	6	7/16	RF signal for three Transmitter/Receiver (50 Ohm) and three Receive Only (50 Ohm)
RXO	6	QMA	RX output for monitoring/location services
Unit	1	LED	Unit Status LED
EAC	1	RJ45	External Alarm Interface (4 alarms)
RET	1	8-pin circular	AISG 2.0 to external devices
OPT	3	SFP+ cage	Optical OBSAI Interface (3 Gbps)

EUT OPERATION

During testing, the EUT was transmitting continuously with 100% duty-cycle at full power on all ports.

EUT FIRMWARE/SOFTWARE

The laptop PC connects to the FSMF System Module over the LMP (Ethernet) port. The system module controls the FXFC RFM via the optical (OBSAI) interface. The laptop is used for changing configuration settings, monitoring tests and controlling the BTS. The following software versions are used for the FXFC testing:

- (1) RFM Unit Software: VEG 26.01.R07
- (2) System Module Software: FL16A_FSM3_9999_160112_027599

MODIFICATIONS

No modifications were made to the EUT during testing.

TESTING**GENERAL INFORMATION**

Antenna port measurements were taken at NTS Plano branch located at 1701 E Plano Pkwy #150 Plano, TX 75074.


Radiated spurious emissions measurements were taken at the NTS Plano Anechoic Chamber listed below. The sites conform to the requirements of ANSI C63.4-2009 *American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* and CISPR 16-1-4:2007 - *Specification for radio disturbance and immunity measuring apparatus and methods Part 1-4: Radio disturbance and immunity measuring apparatus Ancillary equipment Radiated disturbances*. They are on file with the FCC and industry Canada.

Site	Registration Numbers		Location
	FCC	Canada	
Chamber 1	A2LA Accredited Designation Number US1077	IC 4319A	1701 E Plano Pkwy #150 Plano, TX 75074.

Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements.

MEASUREMENT PROCEDURES

Output power, emission bandwidth, conducted spurious, conducted bandedge and carrier frequency stability measurements were all performed via a spectrum analyzer connected to the individual RF chains via a 40dB attenuator and an RF cable. The EUT was operating in 4x4 MIMO configuration at full power for all tests. While measuring one transmit chain, others were terminated with termination blocks. All measurements were corrected for the insertion loss of the attenuator and cable inserted between the RF port of the EUT and the spectrum analyzer. Simple test diagram is shown below.

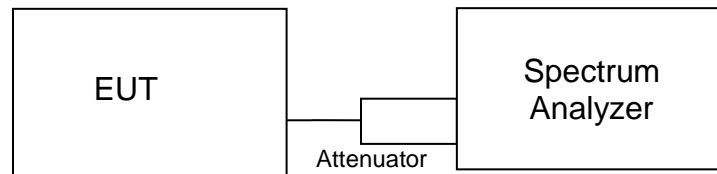

Test Configuration for Antenna Port Measurements

26dB emission bandwidth was measured in accordance with Section 4.1 of FCC KDB 971168 D01 v02r02. 99% occupied bandwidth was measured in accordance with Section 6.6 of RSS-Gen Issue 4. For both measurements an NTS custom software tool was used. Spectrum analyzer settings are shown on their corresponding plots in test results section.

Emissions at the band-edges were also captured with an NTS custom software tool with settings described in the corresponding sections of the FCC and IC rules. Spectrum analyzer settings are shown on their corresponding plots in test results section.

Peak and average output power measurements were performed in accordance with FCC KDB 971168 D01 v02r02. An NTS custom software tool was used for power integration to compensate for resolution bandwidth limitations of the spectrum analyzer and settings are shown on their corresponding plots in test results section.

Peak to average power ratio was calculated in accordance with Section 5.7.2 of FCC KDB 971168 D01 v02r02.

Conducted spurious emissions were captured with TILE6 software which corrected the readings for cable loss and attenuator loss across the 9kHz-20GHz frequency span. Settings of the spectrum analyzer are described in the corresponding test result section.

Transmitter radiated spurious emissions measurements were made in accordance with ANSI C63.4-2009 by measuring the field strength of the emissions from the device at 3m test distance. The eirp limit as specified in the relevant rule part(s) is converted to a field strength at the test distance and the emissions from the EUT are then compared to that limit. Only emissions within 20dB of this limit are subjected to a substitution measurement in accordance with TIA-603-C-2004. Both preliminary and final measurements were performed at the same FCC listed test chamber. Preliminary scans were performed with TILE6 software. This software corrected the measurements for antenna factors, cable losses and pre-amplifier gains. Both polarizations of the receiving

antenna were scanned from 30MHz to 20GHz with a peak detector (RBW=1MHz, VBW=3MHz, with trace max hold over multiple sweeps). Based on the preliminary scan results, frequencies of interest have been maximized via rotating the EUT 360 degrees and varying the height of the test antenna (1m to 4m). Final measurements were also taken with the peak detector as described above. A biconilog antenna was used for 30MHz-1GHz range. A double ridged waveguide horn antenna was used for 1-18GHz range and a smaller double ridged waveguide horn antenna was used for 18-20GHz range. The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. EUT was placed on a non-conductive RF transparent structure to provide 80cm height from the ground floor. A motorized turntable allowed it to be rotated during testing to determine the angle with the highest level of emissions.

Test Equipment

NTS Equipment #	Description	Manufacturer	Model	Calibration Duration	Calibration Due Date
E1345P	PSA	Agilent	E4440A	12 Months	12/30/2016
E1554P	PreAmp (1GHz-40GHz)	MITEQ	JS32-00104000-62-5P	12 Months	1/27/2017
E1148P	PreAmp (30MHz-1GHz)	MITEQ	AM-1431-N-1179WP	12 Months	9/29/2016
E1524P	Biconilog Antenna (30MHz-1GHz)	ETS Lindgren	3142D	12 Months	10/28/2016
E1149P	Horn Antenna (1GHz-18GHz)	EMCO	3115	12 Months	12/16/2016

Appendix A Test Data

RF Output Power

RF output power has been measured in both Peak and RMS Average terms for each transmit chain at center channel for all modulations and bandwidth modes.. Peak to average ratio (PAR) has been calculated as described in Section 5.7.2 of KDB971168 D01 v02r02 and all results are presented in tabular form below.

		LTE - QPSK			LTE - 16QAM			LTE - 64QAM		
		Peak (dBm)	Average (dBm)	PAR (dB)	Peak (dBm)	Average (dBm)	PAR (dB)	Peak (dBm)	Average (dBm)	PAR (dB)
Port 1 Center Channel	1.4M	55.73	48.95	6.78	55.94	49.13	6.81	55.64	48.93	6.71
	3M	56.63	48.99	7.64	56.82	49.06	7.76	56.8	49.01	7.79
	5M	57.05	48.98	8.07	57.63	49.11	8.52	56.95	48.99	7.96
	10M	57.36	48.93	8.43	57.98	49.01	8.97	57.17	49.1	8.07
	15M	57.18	49.03	8.15	58.11	49.1	9.01	57.18	49.08	8.1
	20M	57.2	49.01	8.19	58.06	48.98	9.08	57.13	48.98	8.15
Port 3 Center Channel	1.4M	55.83	49.11	6.72	56.02	49.03	6.99	55.71	49.05	6.66
	3M	56.71	49	7.71	56.87	49.15	7.72	56.82	49.06	7.76
	5M	57.03	49.02	8.01	57.72	49	8.72	56.92	49.06	7.86
	10M	57.25	49.08	8.17	57.87	49.02	8.85	57.08	49.02	8.06
	15M	57.27	49.18	8.09	58.2	49.18	9.02	57.31	49.15	8.16
	20M	57.31	49.07	8.24	58.13	49.04	9.09	57.23	49.09	8.14
Port 5 Center Channel	1.4M	55.93	49.16	6.77	56.11	49.07	7.04	55.74	49.14	6.6
	3M	56.76	49.06	7.7	56.85	49.13	7.72	56.88	49.11	7.77
	5M	57.08	49.14	7.94	57.75	48.98	8.77	56.96	49.11	7.85
	10M	57.3	49.11	8.19	57.94	49.01	8.93	57.13	49.01	8.12
	15M	57.27	49.19	8.08	58.21	49.16	9.05	57.27	49.1	8.17
	20M	57.31	49.04	8.27	58.06	49.07	8.99	57.23	47.07	10.16
Combined Center Channel	1.4M	60.6	53.85	6.75	60.8	53.85	6.95	60.47	53.81	6.66
	3M	61.47	53.79	7.68	61.62	53.88	7.74	61.6	53.83	7.77
	5M	61.82	53.82	8	62.47	53.8	8.67	61.71	53.82	7.89
	10M	62.07	53.81	8.26	62.7	53.78	8.92	61.9	53.81	8.09
	15M	62.01	53.91	8.1	62.94	53.92	9.02	62.02	53.88	8.14
	20M	62.04	53.81	8.23	62.85	53.8	9.05	61.97	53.24	8.73


Based on the results above, Port 5 had the highest RMS average power and therefore it was selected for all the remaining LTE mode antenna port tests on the product.

Subsequently output power levels on lowest and highest channels were tested only on Port 5 and results presented below.


		LTE - QPSK			LTE - 16QAM			LTE - 64QAM		
		Peak (dBm)	Average (dBm)	PAR (dB)	Peak (dBm)	Average (dBm)	PAR (dB)	Peak (dBm)	Average (dBm)	PAR (dB)
Port 5 Bottom Channel	1.4M	55.35	48.54	6.81	55.56	48.51	7.05	55.27	48.52	6.75
	3M*	55.65	47.38	8.27	55.6	47.41	8.19	55.57	47.49	8.08
	5M*	55.8	47.6	8.2	56.61	47.56	9.05	55.7	47.59	8.11
	10M*	56.02	47.57	8.45	56.52	47.59	8.93	55.77	47.58	8.19
	15M*	55.86	47.62	8.24	56.82	47.67	9.15	55.87	47.62	8.25
	20M*	56.09	47.75	8.34	56.77	47.74	9.03	56.92	47.68	9.24
Port 5 Bottom Channel + 1	1.4M	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	3M	56.3	48.62	7.68	56.46	48.62	7.84	56.44	48.66	7.78
	5M	56.77	48.75	8.02	57.45	48.77	8.68	56.66	48.72	7.94
	10M	57	48.76	8.24	57.67	48.75	8.92	56.9	48.75	8.15
	15M	56.91	48.78	8.13	57.91	48.8	9.11	56.96	48.78	8.18
	20M	57.07	48.83	8.24	57.93	48.86	9.07	57.04	48.84	8.2
Port 5 Top Channel - 1	1.4M	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	3M	56.45	48.73	7.72	56.57	48.95	7.62	56.54	48.74	7.8
	5M	56.9	48.88	8.02	57.52	48.81	8.71	56.75	48.85	7.9
	10M	57.1	48.9	8.2	57.76	48.88	8.88	56.97	48.87	8.1
	15M	56.98	48.9	8.08	57.96	48.93	9.03	57.04	48.94	8.1
	20M	57.19	48.92	8.27	57.94	48.96	8.98	57.14	48.96	8.18
Port 5 Top Channel	1.4M	55.45	48.68	6.77	55.57	48.62	6.95	55.35	48.72	6.63
	3M*	55.72	47.63	8.09	55.69	47.5	8.19	55.68	47.67	8.01
	5M*	55.92	47.71	8.21	56.7	47.74	8.96	55.79	47.74	8.05
	10M*	56.18	47.76	8.42	56.67	47.8	8.87	55.88	47.77	8.11
	15M*	56	47.75	8.25	56.96	47.81	9.15	55.96	47.75	8.21
	20M*	56.13	47.85	8.28	56.93	47.8	9.13	56.06	47.79	8.27

Note * = Power Reduced to 60Watts in order to meet the Bandedge Requirements.


All corresponding plots included on the following pages. Total path loss of 39.7dB accounted in via reference level offset to the spectrum analyzer.

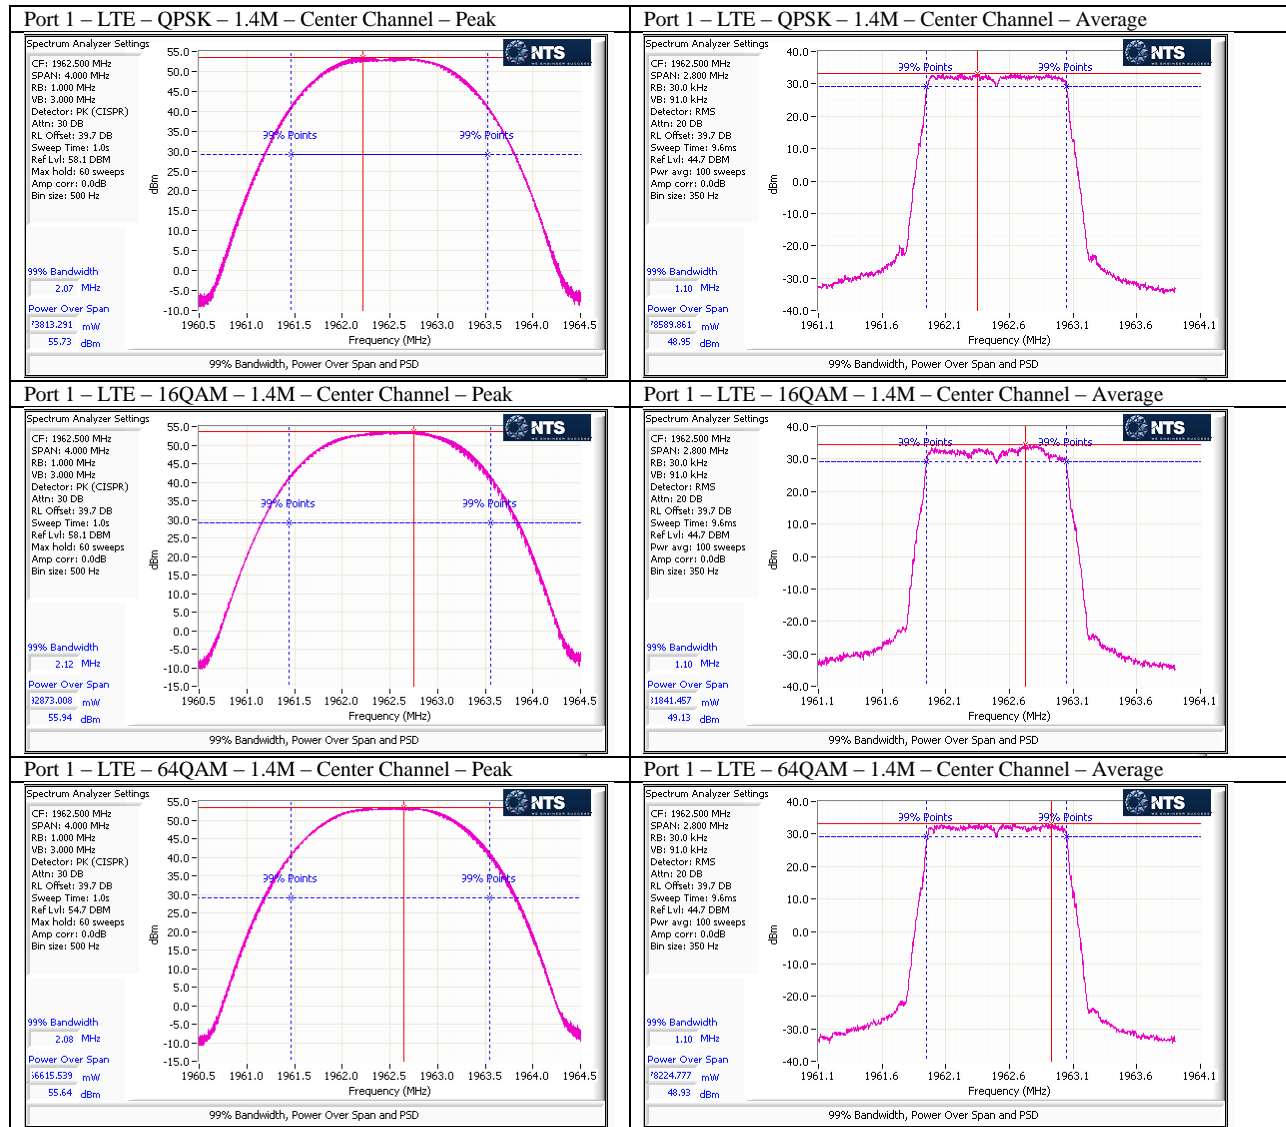


Port 3 – LTE – QPSK – 1.4M – Center Channel – Peak

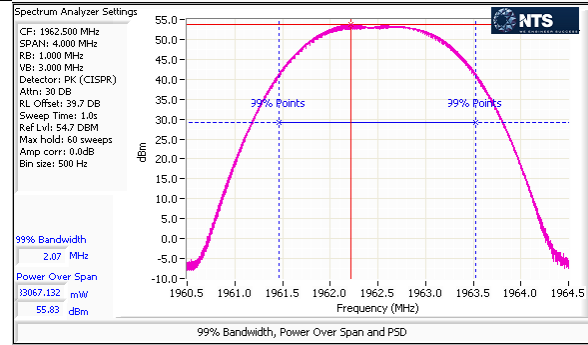


Port 3 – LTE – QPSK – 1.4M – Center Channel – Average

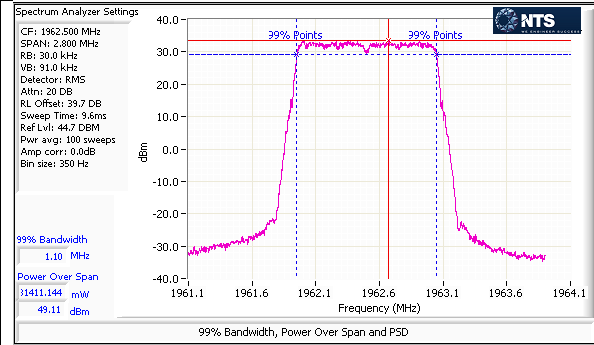


Port 3 – LTE – 16QAM – 1.4M – Center Channel – Peak

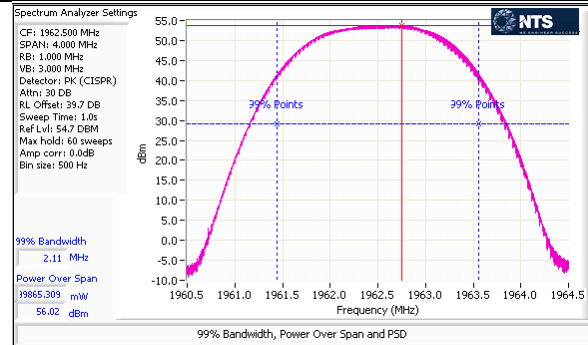


Port 3 – LTE – 16QAM – 1.4M – Center Channel – Average

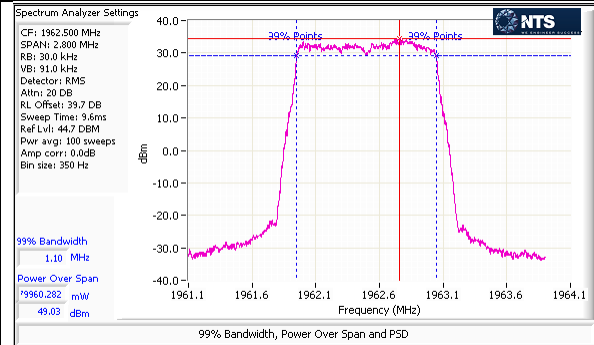


Port 3 – LTE – 64QAM – 1.4M – Center Channel – Peak

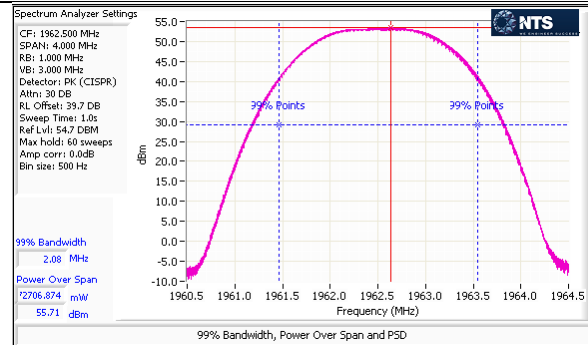


Port 3 – LTE – 64QAM – 1.4M – Center Channel – Average

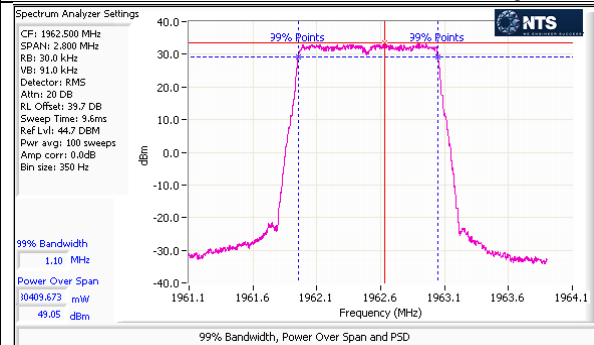


Port 5 – LTE – QPSK – 1.4M – Center Channel – Peak

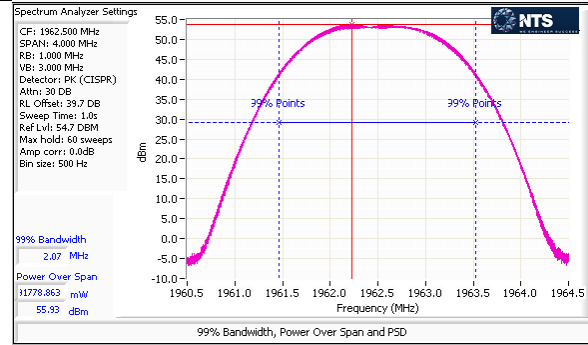


Port 5 – LTE – QPSK – 1.4M – Center Channel – Average

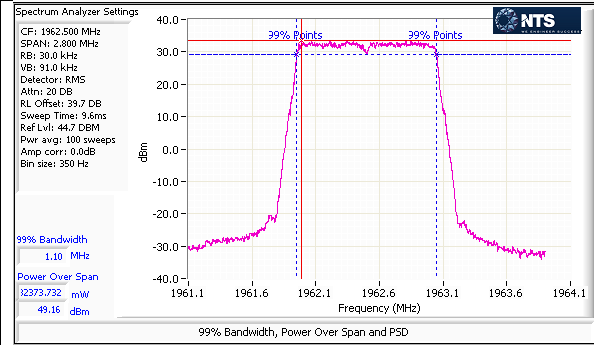


Port 5 – LTE – 16QAM – 1.4M – Center Channel – Peak

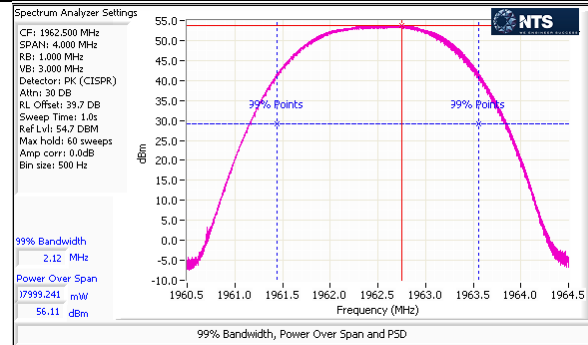


Port 5 – LTE – 16QAM – 1.4M – Center Channel – Average

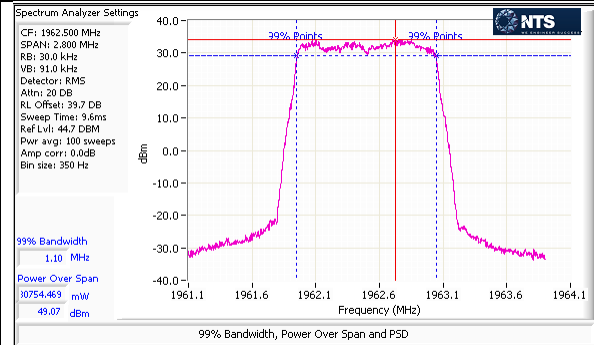



Port 5 – LTE – 64QAM – 1.4M – Center Channel – Peak

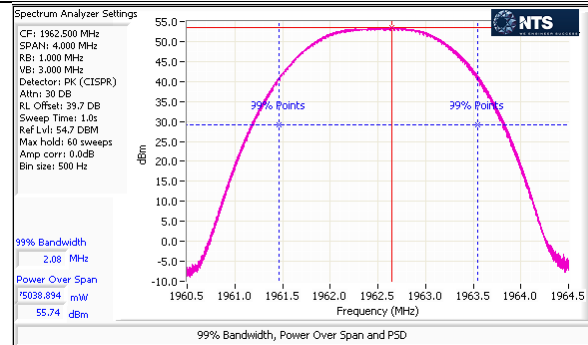


Port 5 – LTE – 64QAM – 1.4M – Center Channel – Average

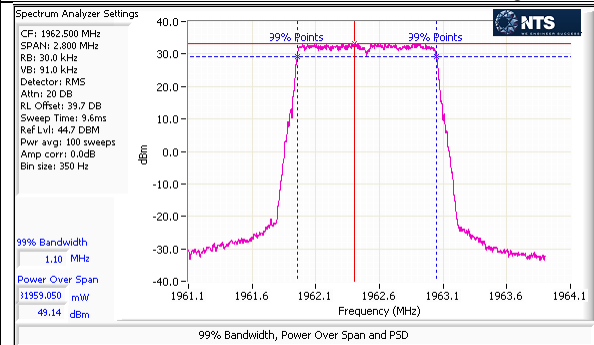

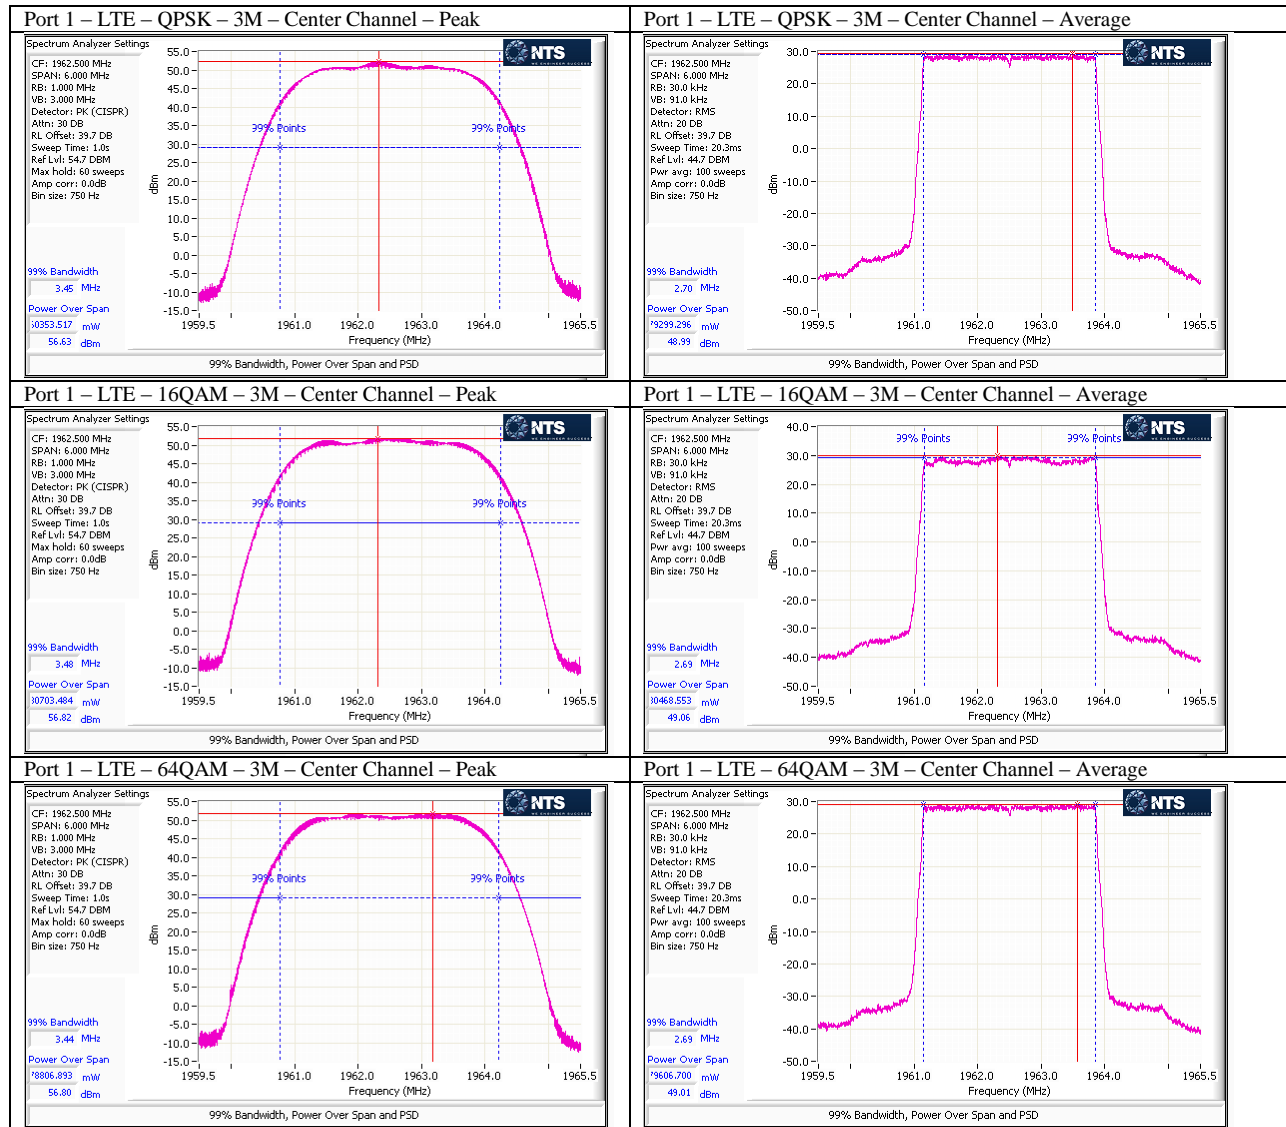


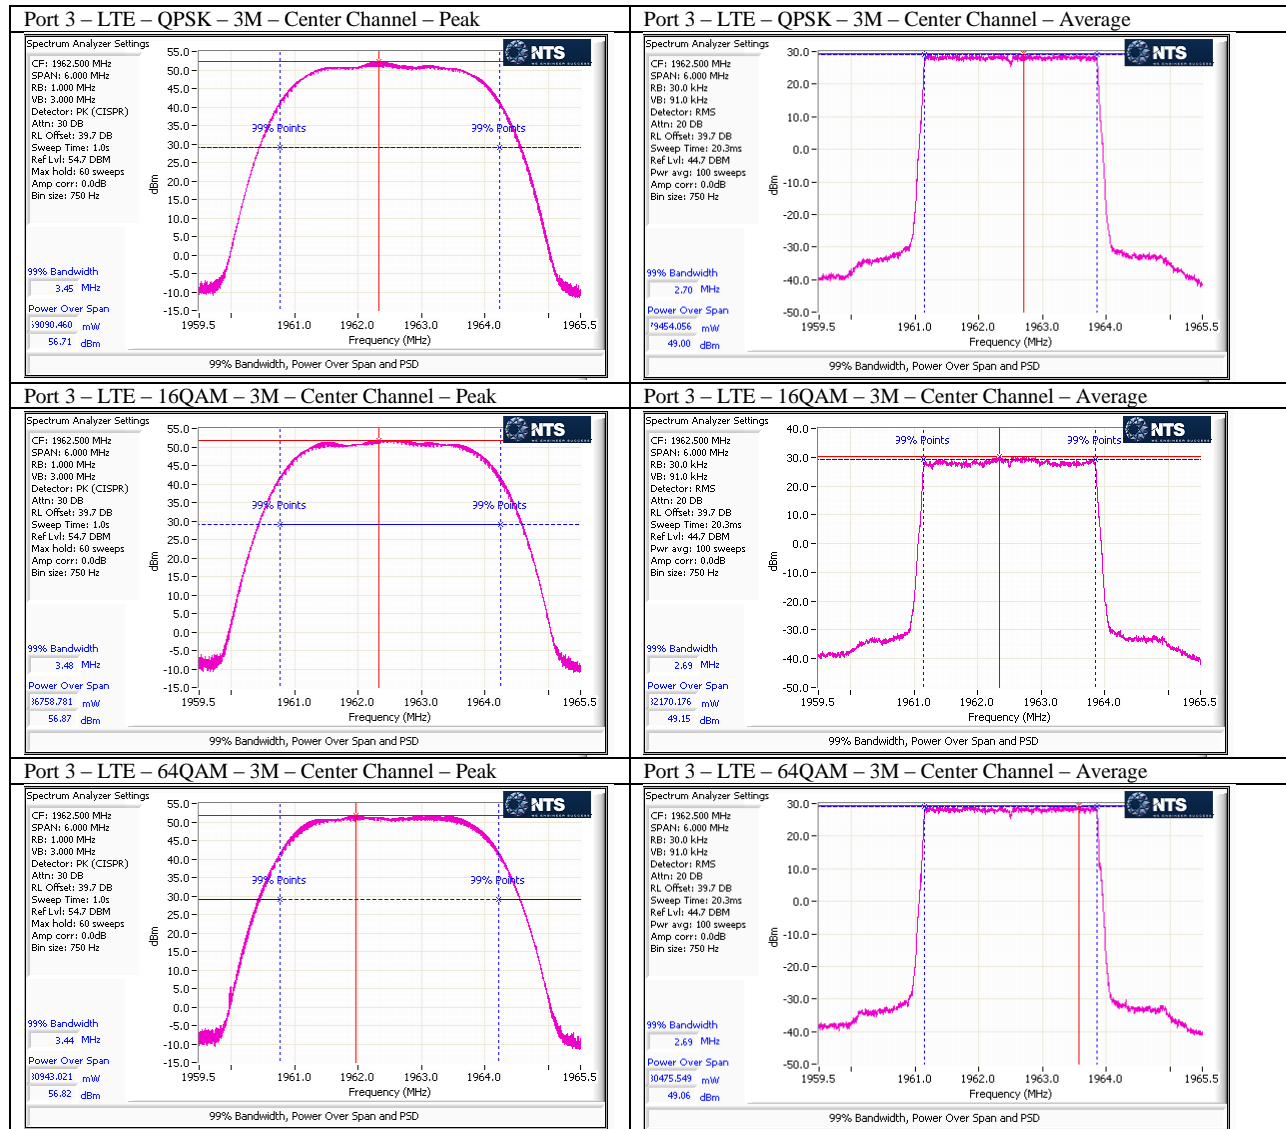


Port 5 – LTE – QPSK – 3M – Center Channel – Peak

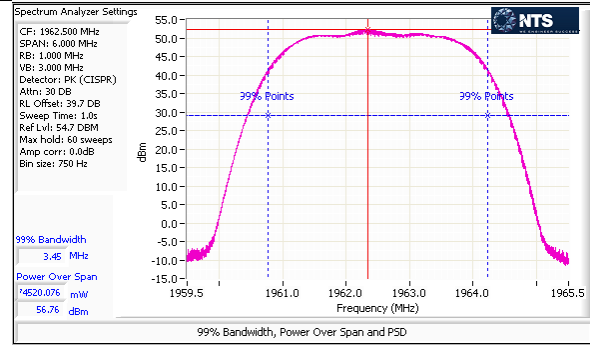


Port 5 – LTE – QPSK – 3M – Center Channel – Average

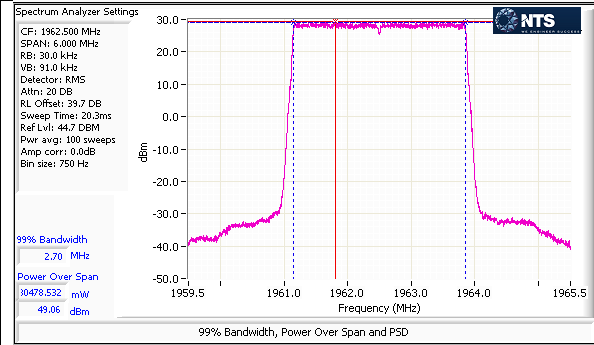


Port 5 – LTE – 16QAM – 3M – Center Channel – Peak

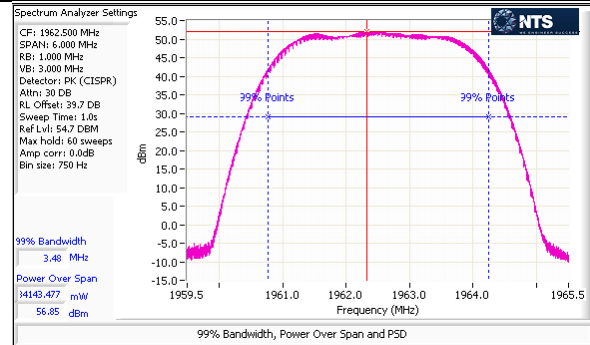


Port 5 – LTE – 16QAM – 3M – Center Channel – Average

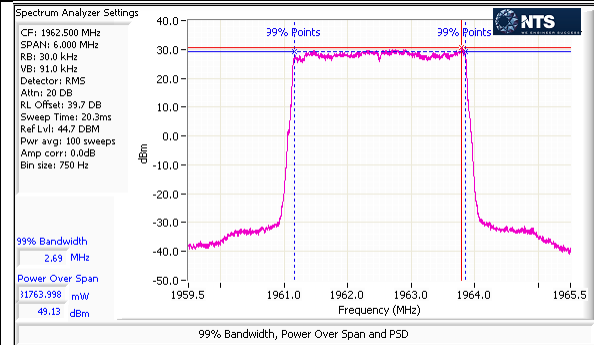


Port 5 – LTE – 64QAM – 3M – Center Channel – Peak

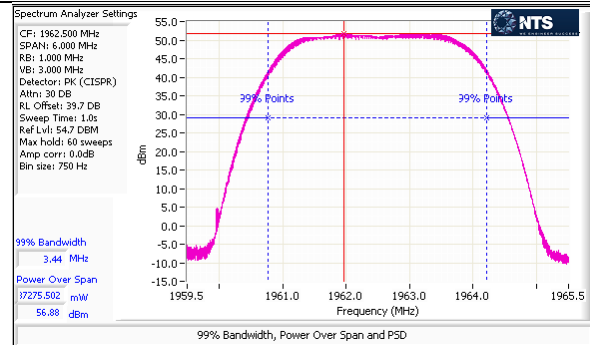


Port 5 – LTE – 64QAM – 3M – Center Channel – Average

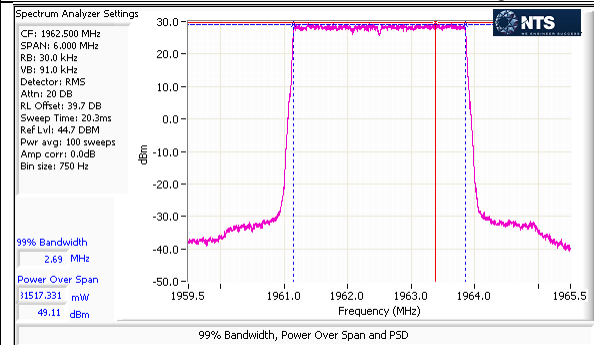


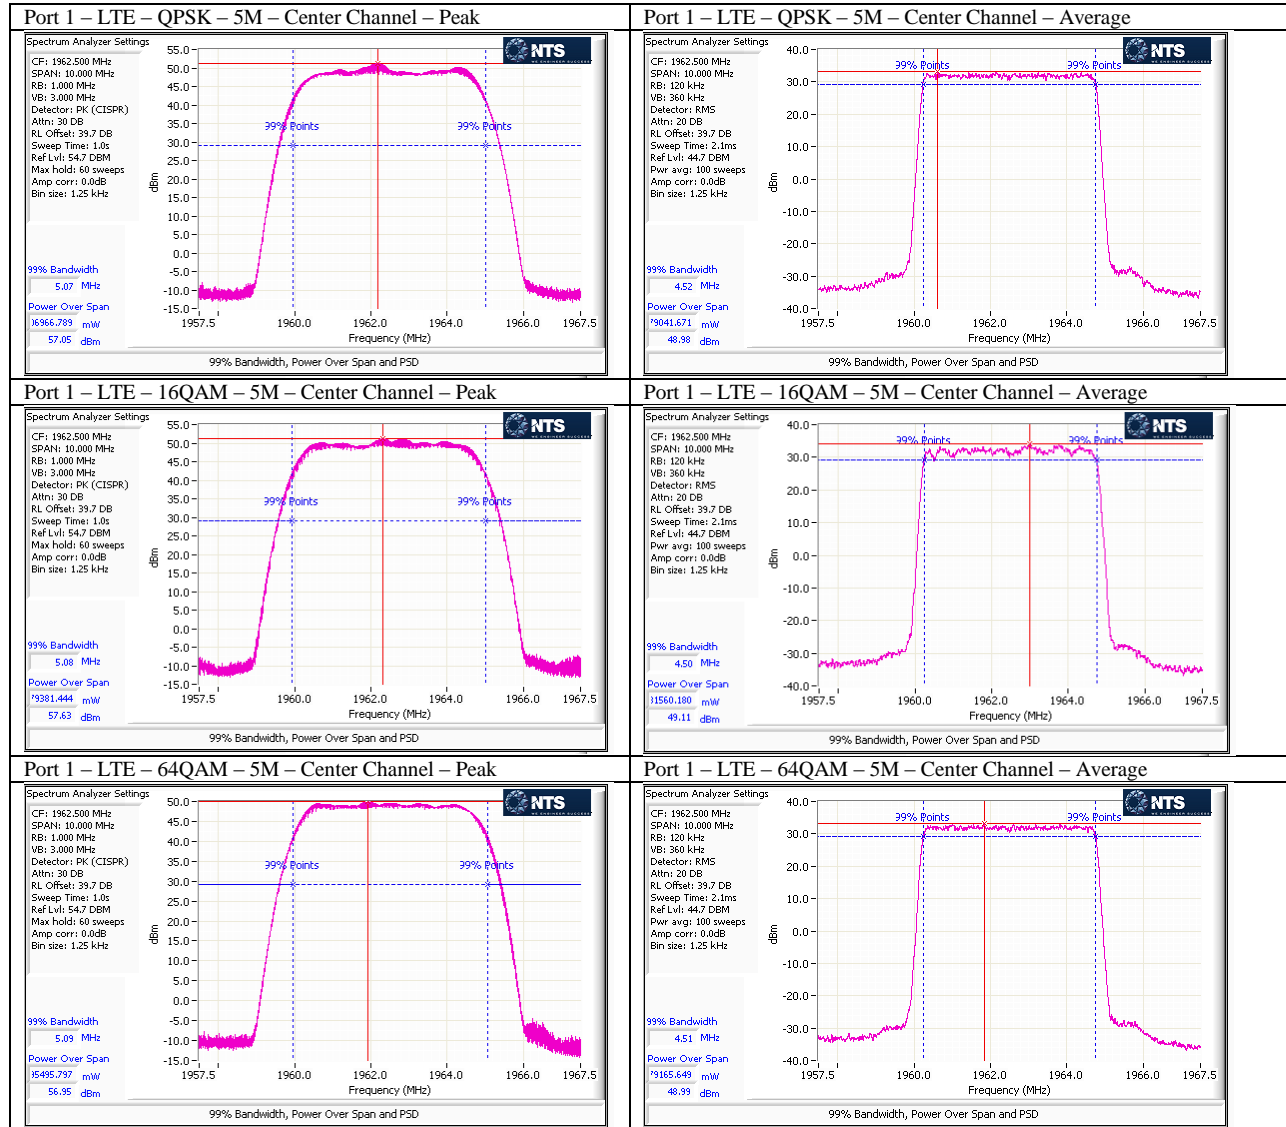


Port 3 – LTE – QPSK – 5M – Center Channel – Peak

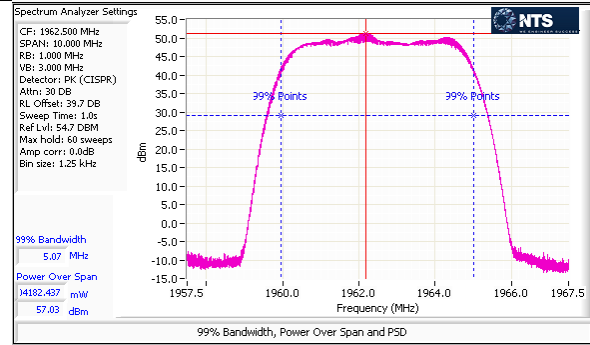


Port 3 – LTE – QPSK – 5M – Center Channel – Average

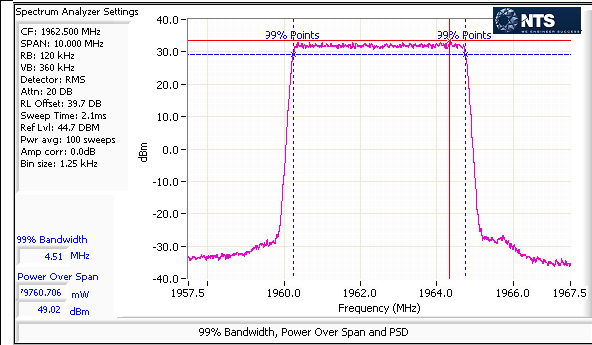


Port 3 – LTE – 16QAM – 5M – Center Channel – Peak

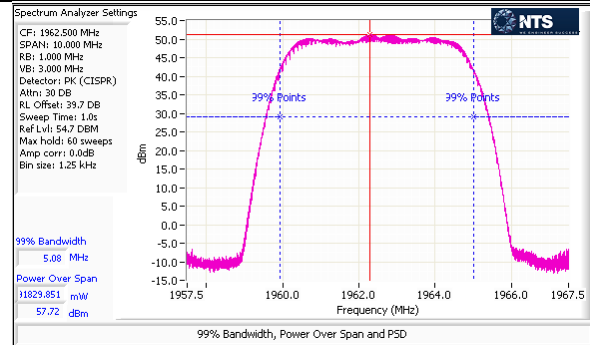


Port 3 – LTE – 16QAM – 5M – Center Channel – Average

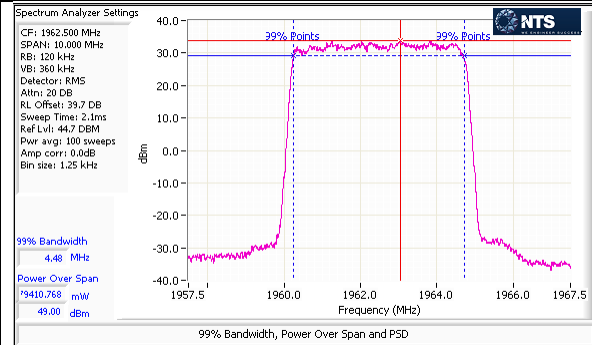


Port 3 – LTE – 64QAM – 5M – Center Channel – Peak

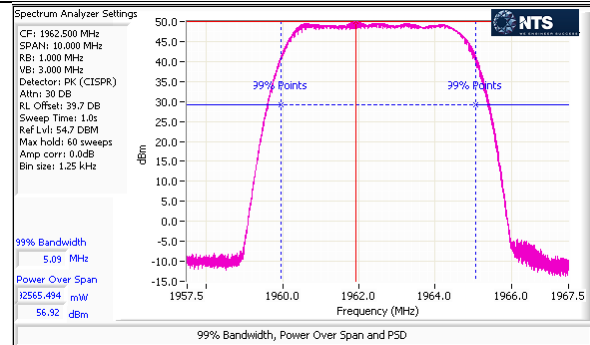


Port 3 – LTE – 64QAM – 5M – Center Channel – Average

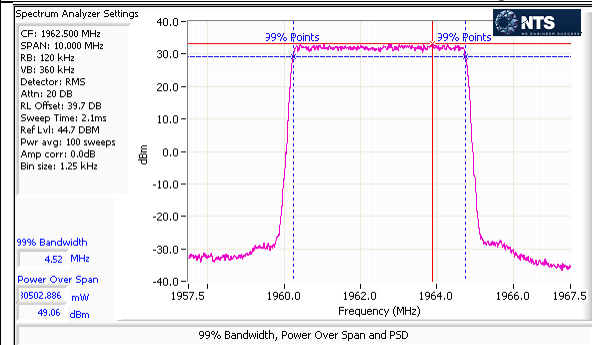


Port 5 – LTE – QPSK – 5M – Center Channel – Peak

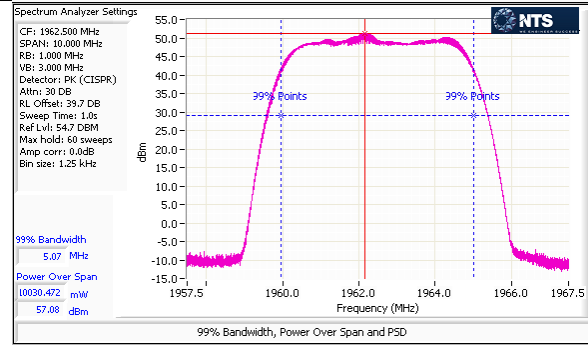


Port 5 – LTE – QPSK – 5M – Center Channel – Average

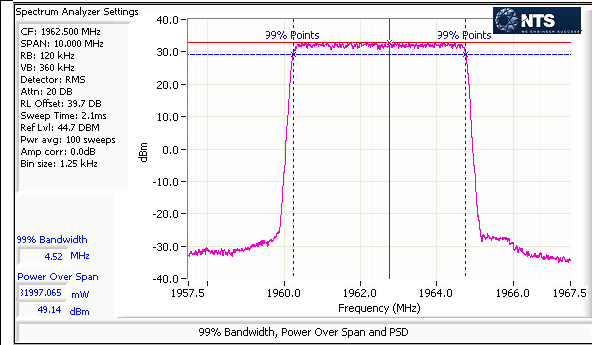


Port 5 – LTE – 16QAM – 5M – Center Channel – Peak

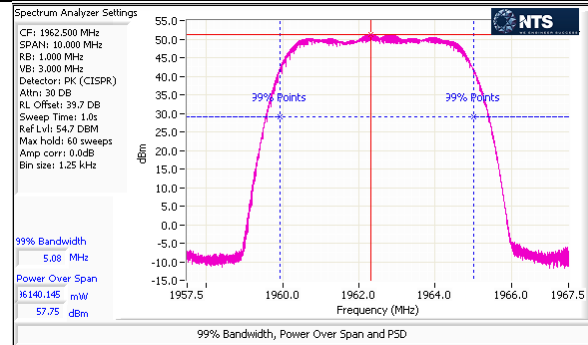


Port 5 – LTE – 16QAM – 5M – Center Channel – Average

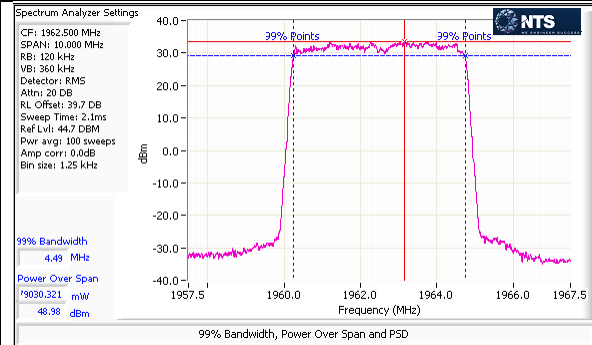


Port 5 – LTE – 64QAM – 5M – Center Channel – Peak

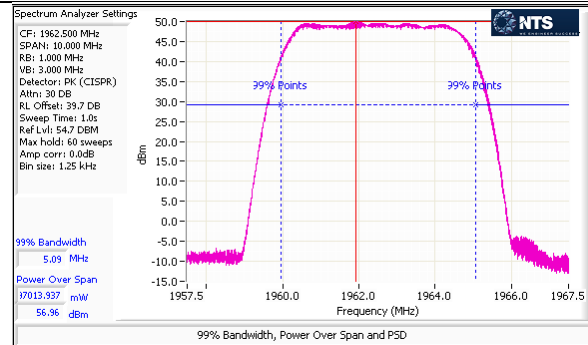


Port 5 – LTE – 64QAM – 5M – Center Channel – Average

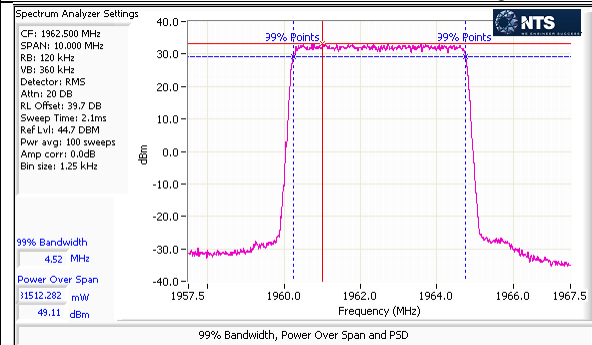


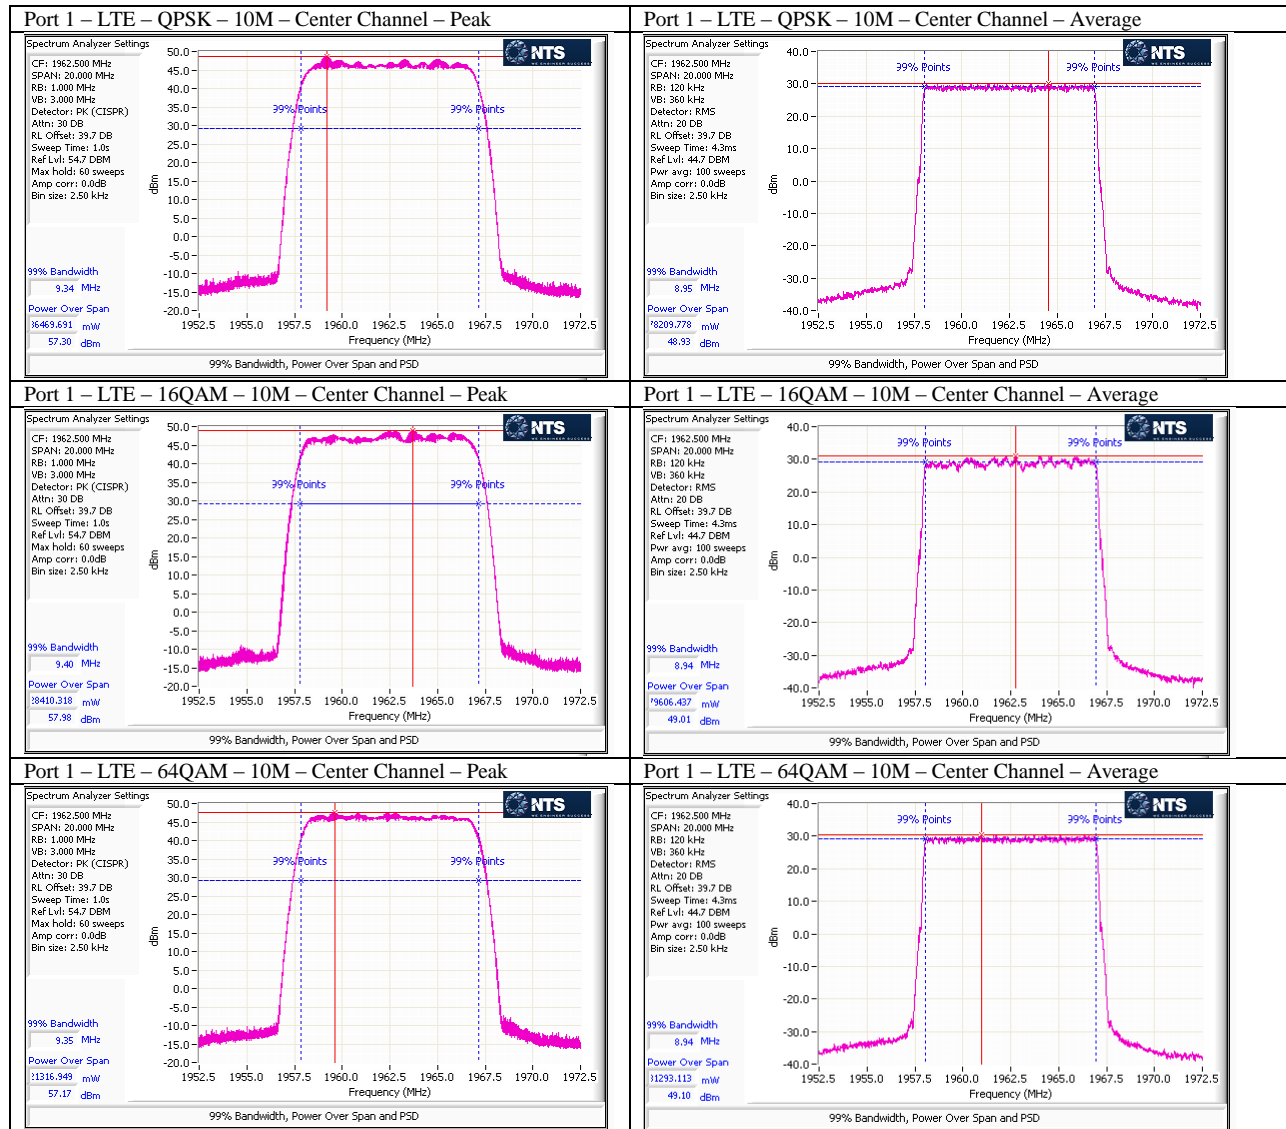


Port 3 – LTE – QPSK – 10M – Center Channel – Peak

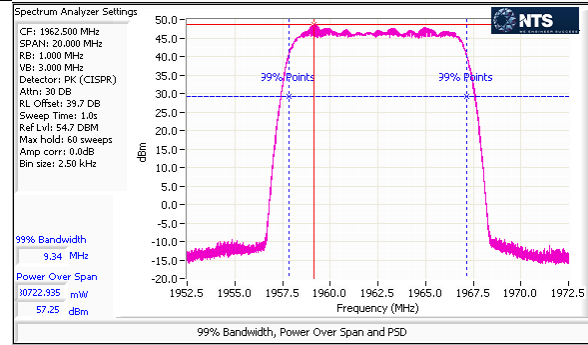


Port 3 – LTE – QPSK – 10M – Center Channel – Average

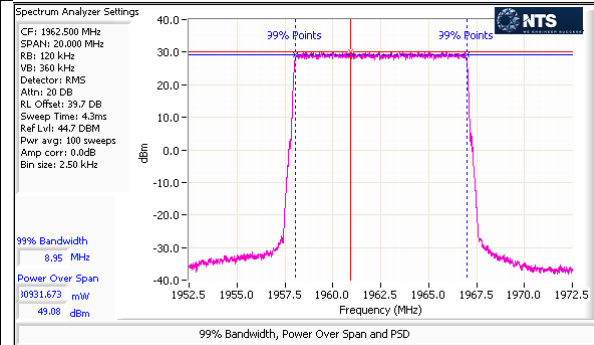


Port 3 – LTE – 16QAM – 10M – Center Channel – Peak

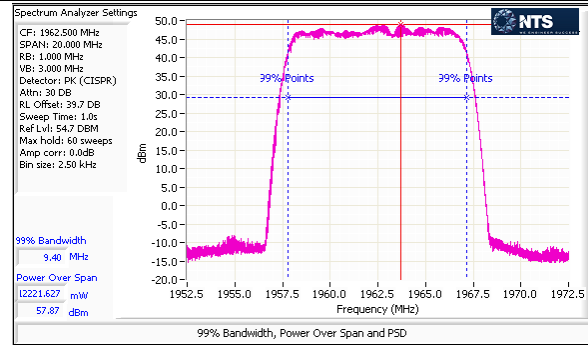


Port 3 – LTE – 16QAM – 10M – Center Channel – Average

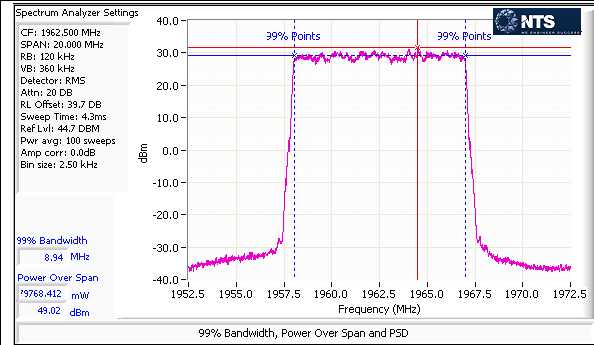



Port 3 – LTE – 64QAM – 10M – Center Channel – Peak

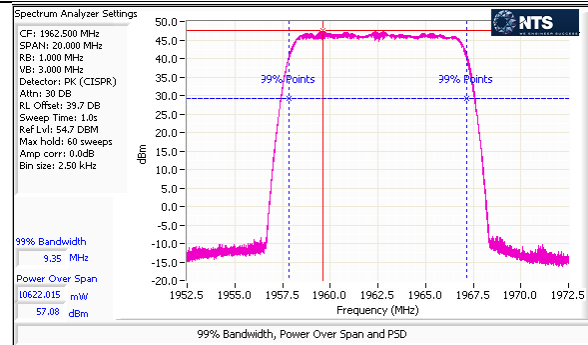



Port 3 – LTE – 64QAM – 10M – Center Channel – Average

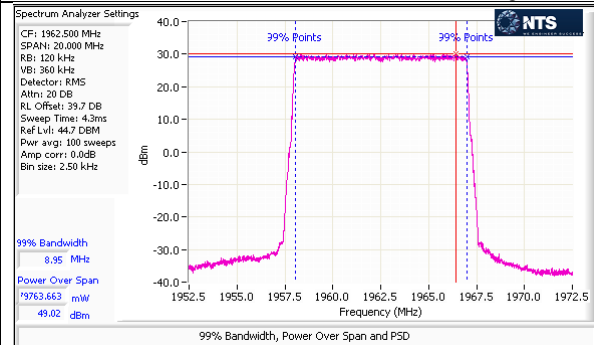

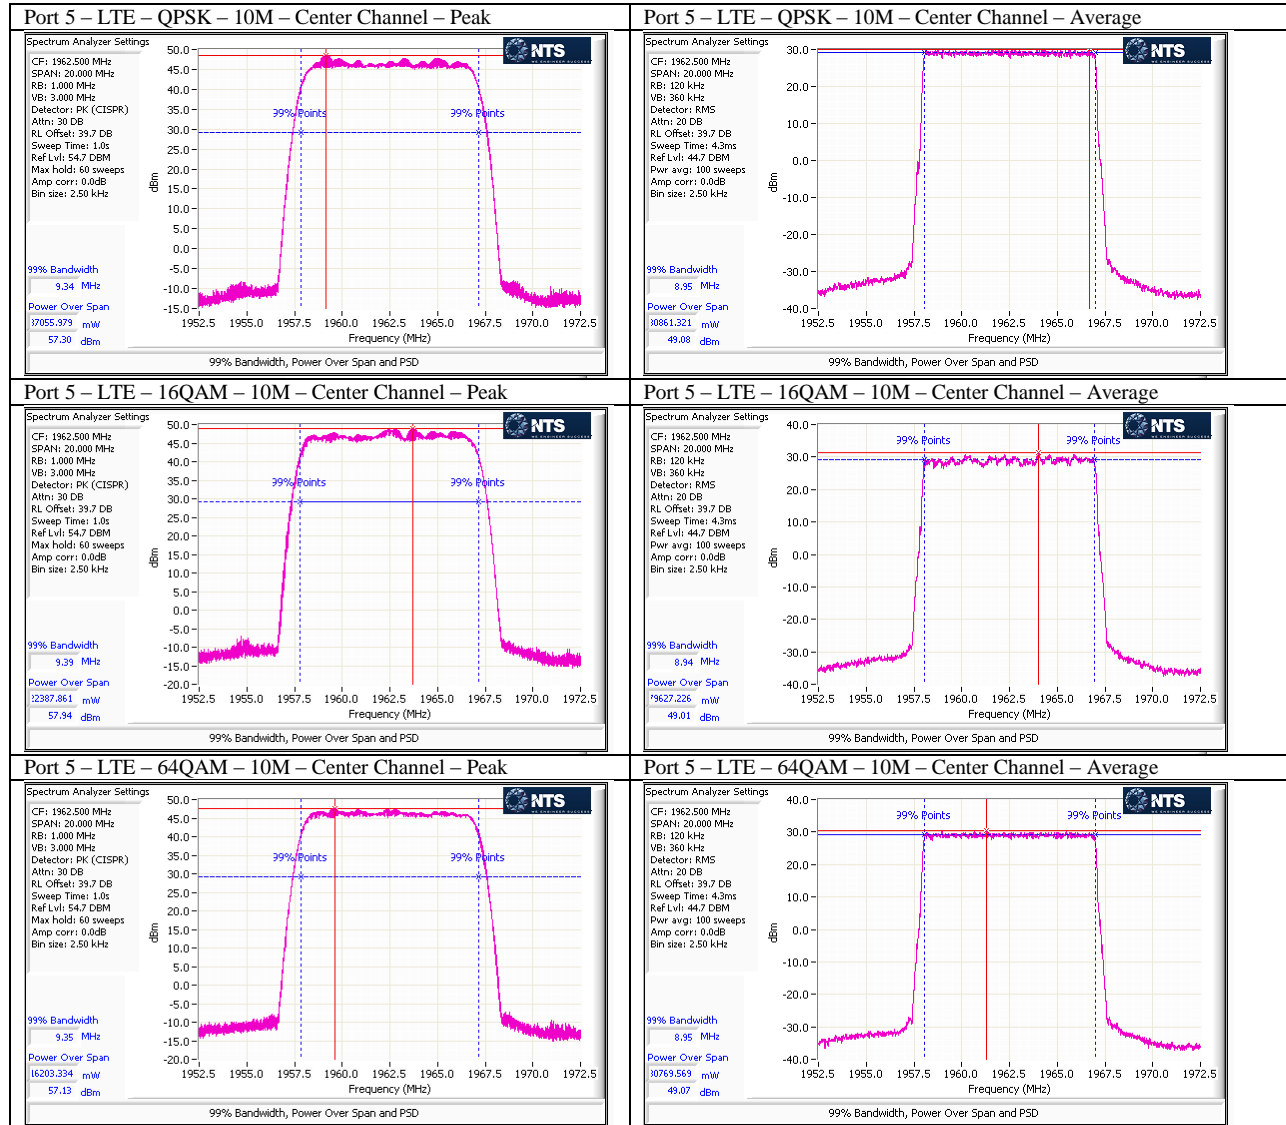


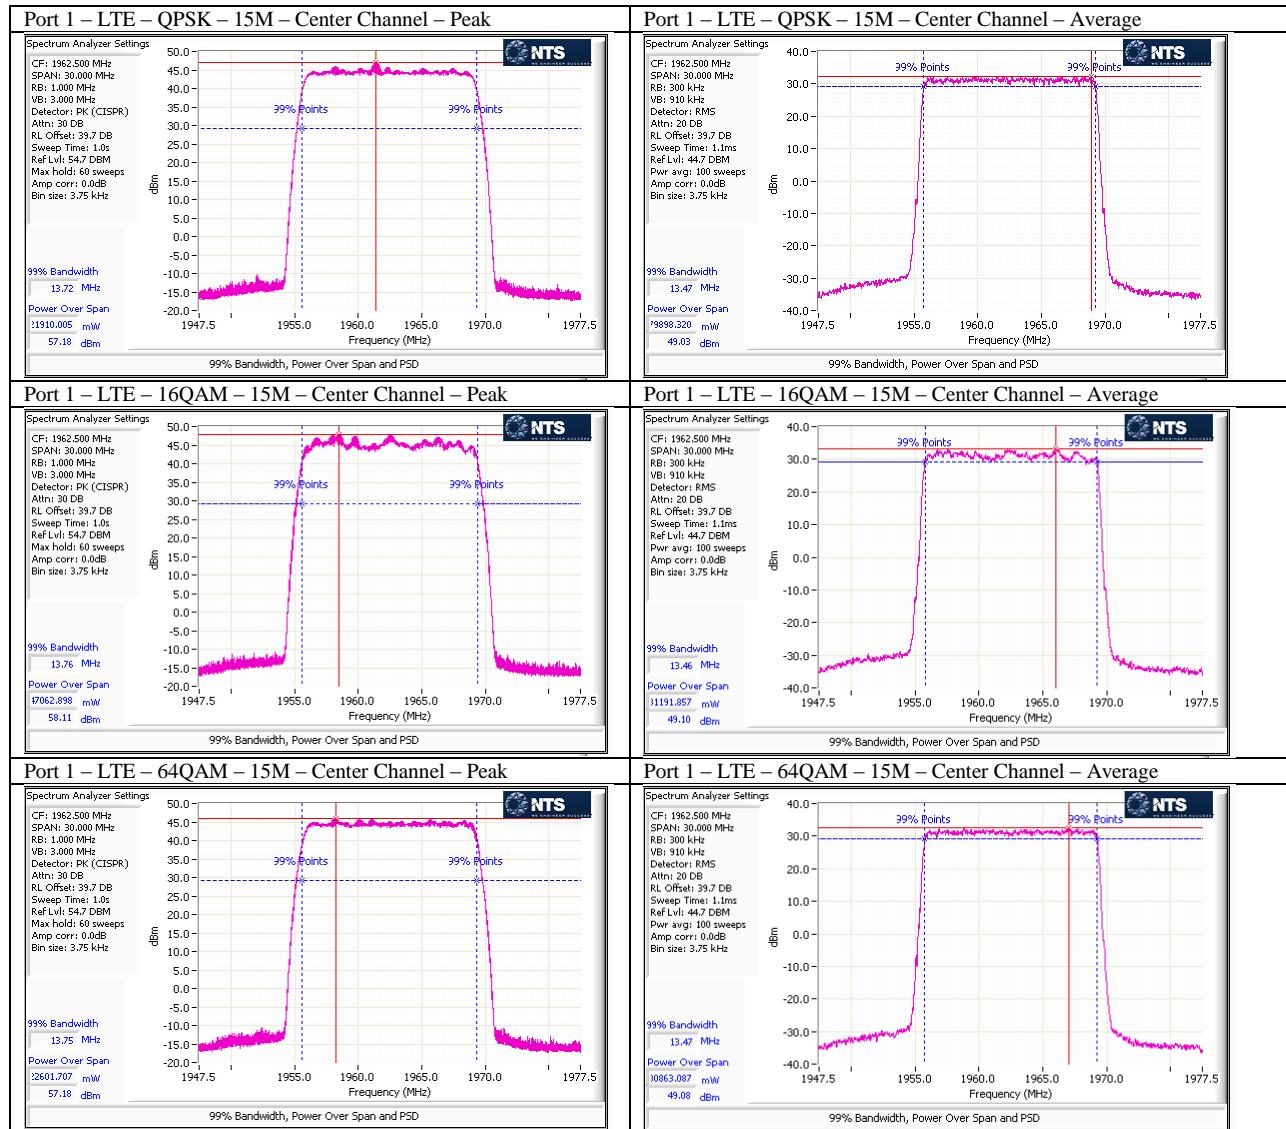

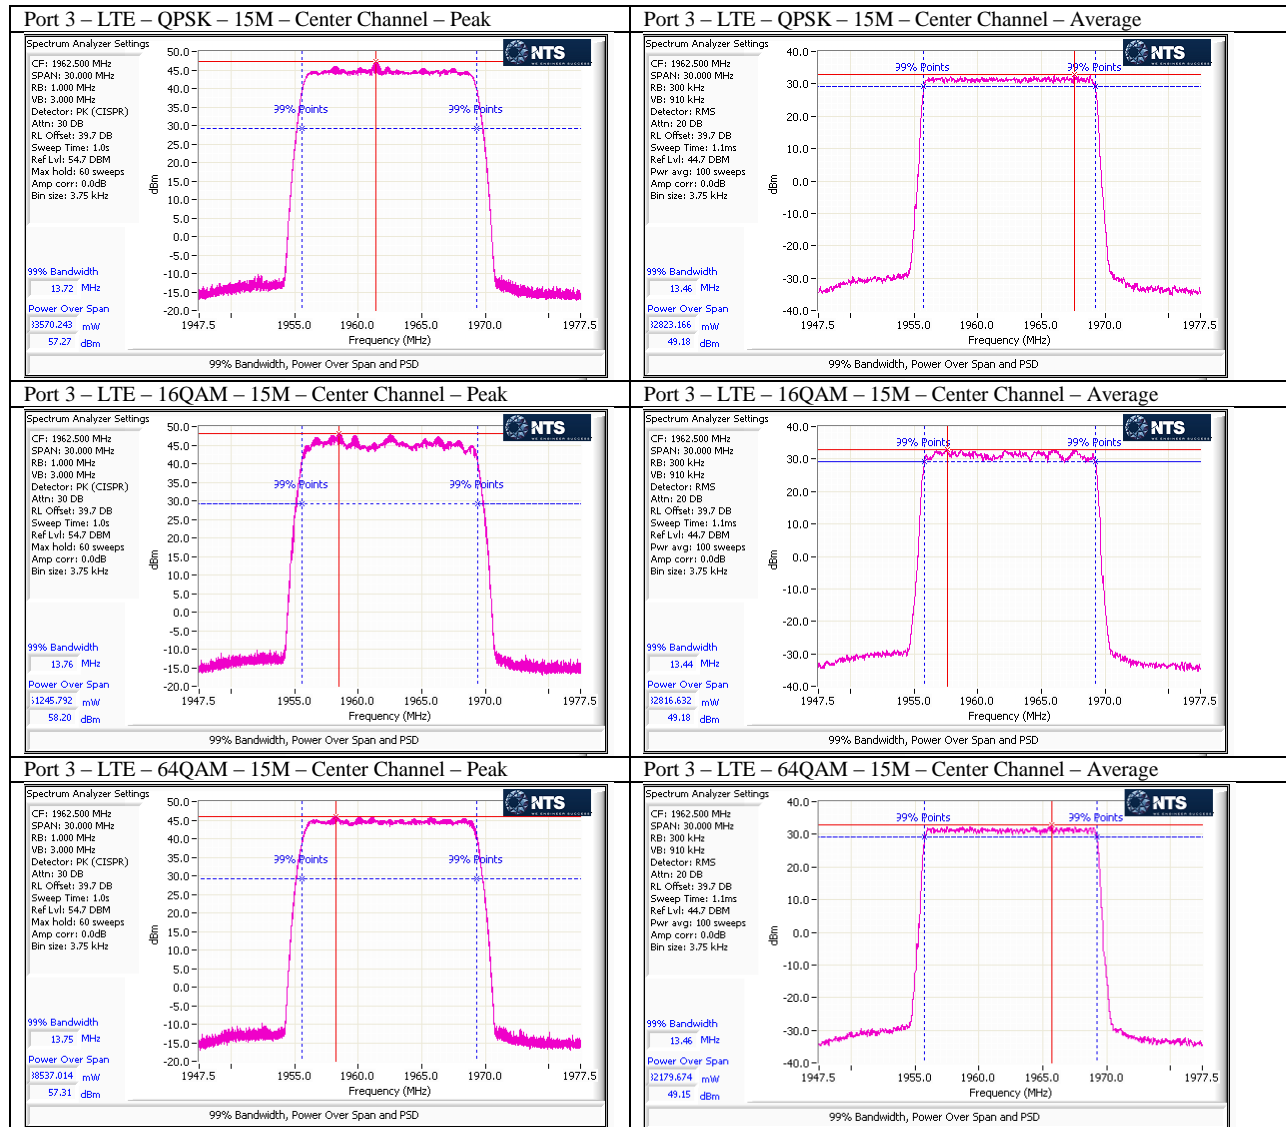


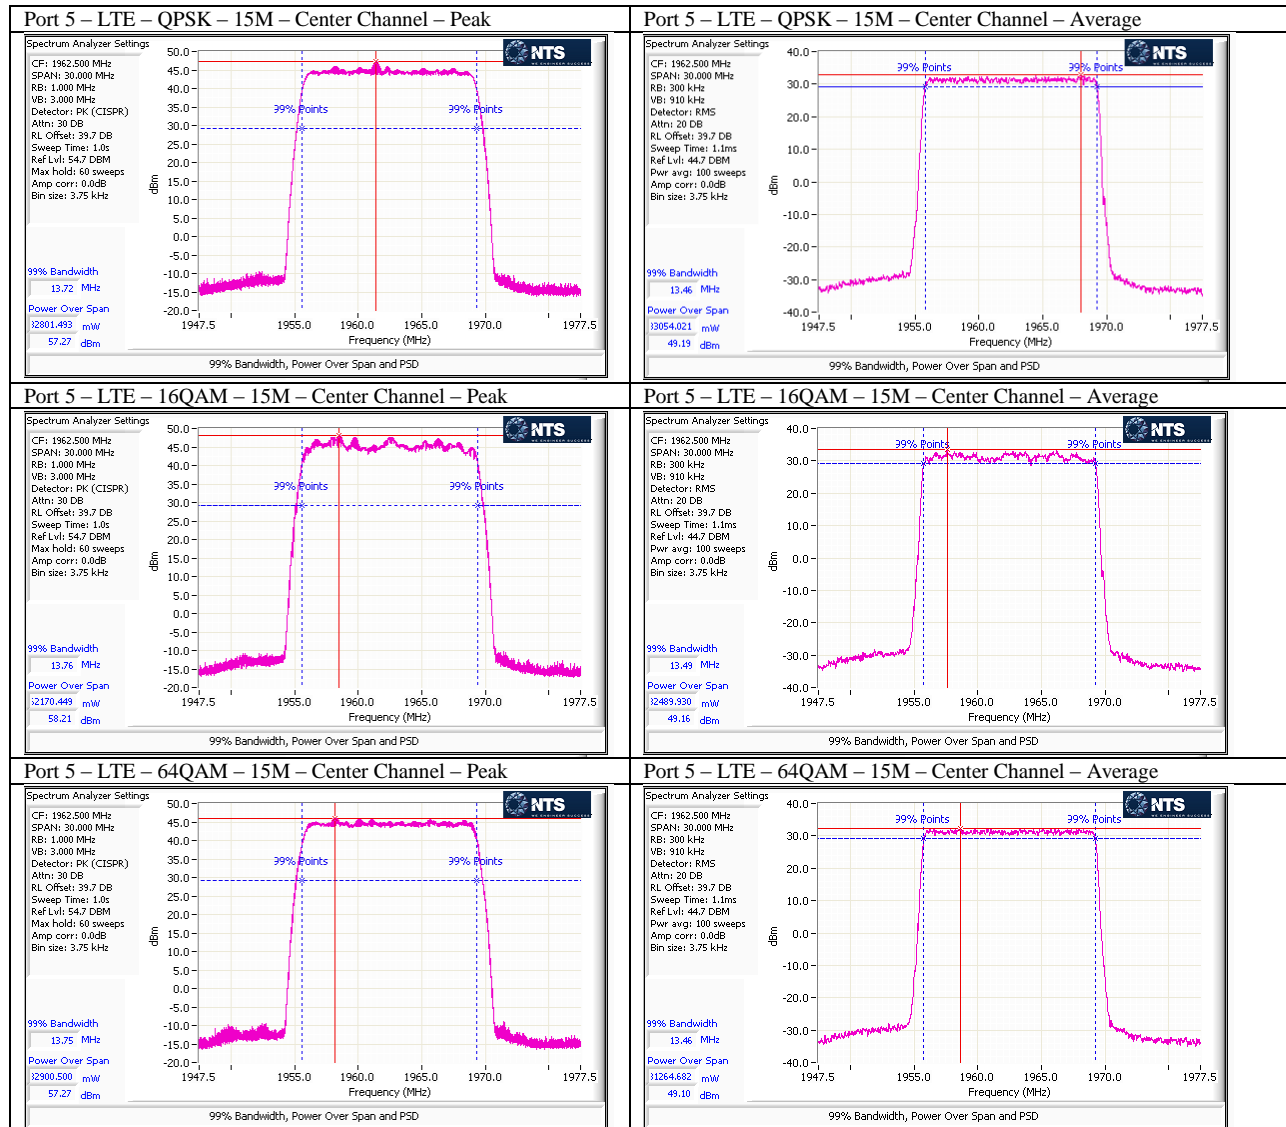


Port 1 – LTE – QPSK – 20M – Center Channel – Peak

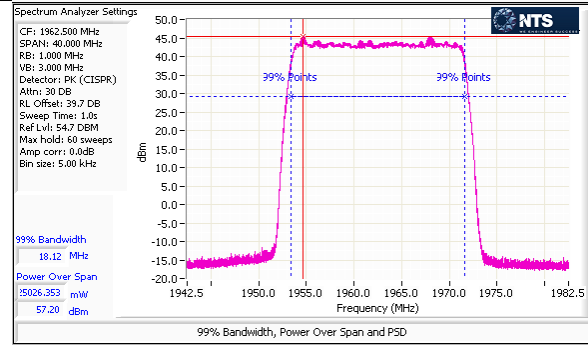


Port 1 – LTE – QPSK – 20M – Center Channel – Average

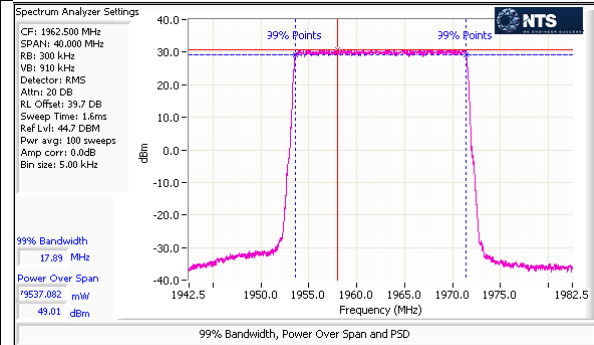


Port 1 – LTE – 16QAM – 20M – Center Channel – Peak

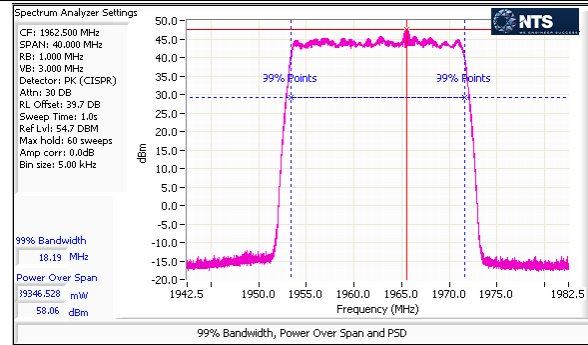


Port 1 – LTE – 16QAM – 20M – Center Channel – Average

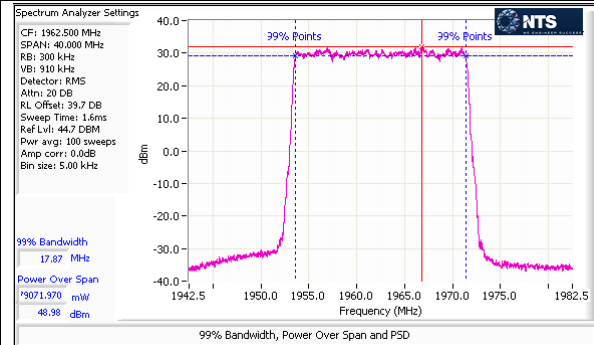


Port 1 – LTE – 64QAM – 20M – Center Channel – Peak

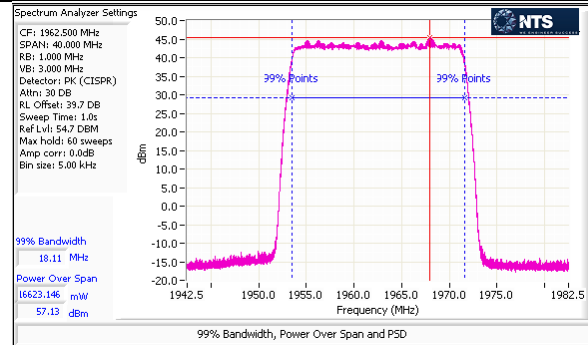


Port 1 – LTE – 64QAM – 20M – Center Channel – Average

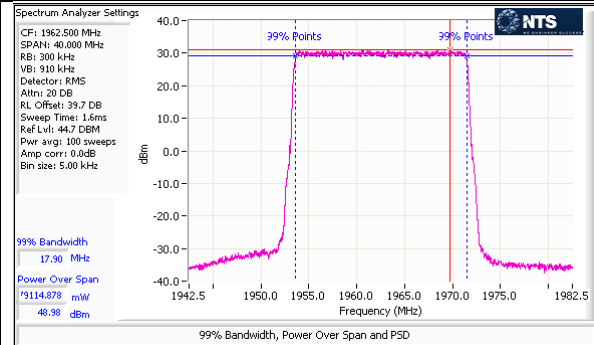


Port 3 – LTE – QPSK – 20M – Center Channel – Peak

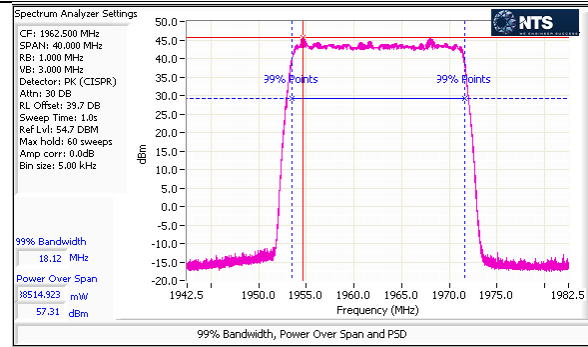


Port 3 – LTE – QPSK – 20M – Center Channel – Average

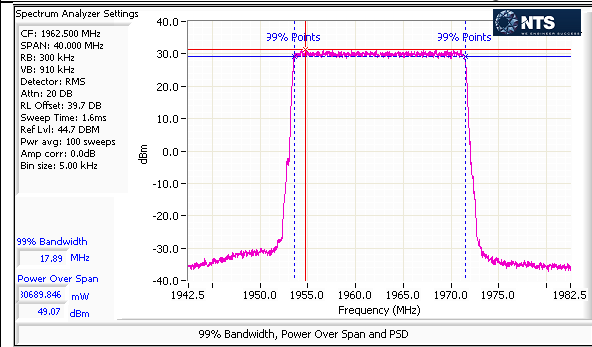


Port 3 – LTE – 16QAM – 20M – Center Channel – Peak

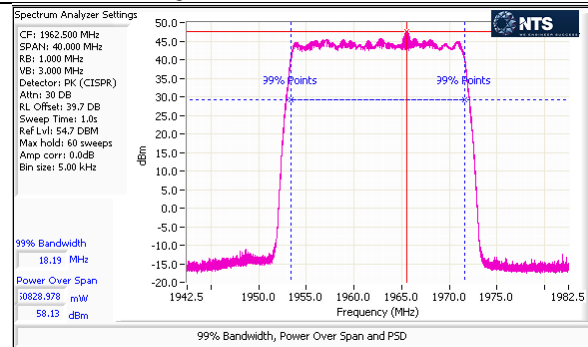


Port 3 – LTE – 16QAM – 20M – Center Channel – Average

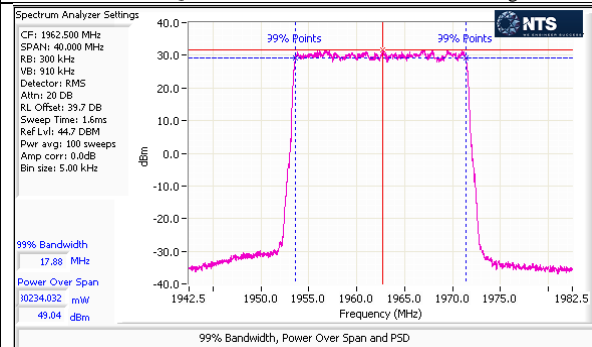


Port 3 – LTE – 64QAM – 20M – Center Channel – Peak

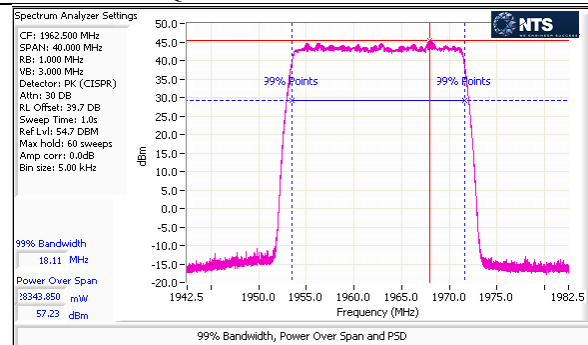


Port 3 – LTE – 64QAM – 20M – Center Channel – Average

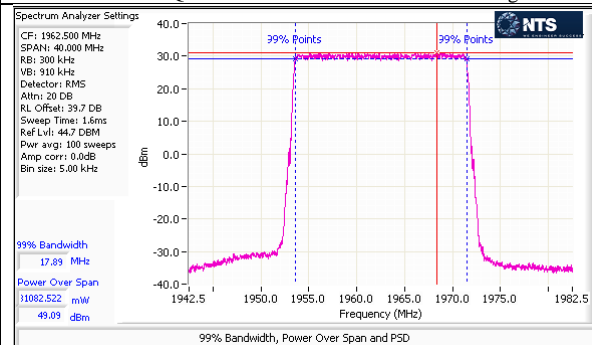


Port 5 – LTE – QPSK – 20M – Center Channel – Peak

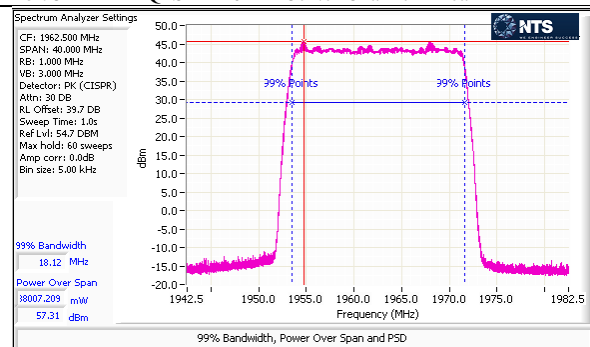


Port 5 – LTE – QPSK – 20M – Center Channel – Average

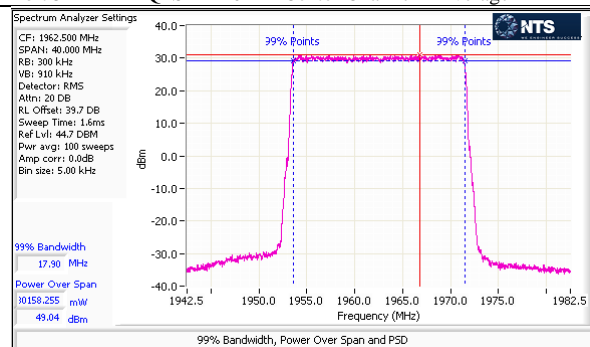


Port 5 – LTE – 16QAM – 20M – Center Channel – Peak

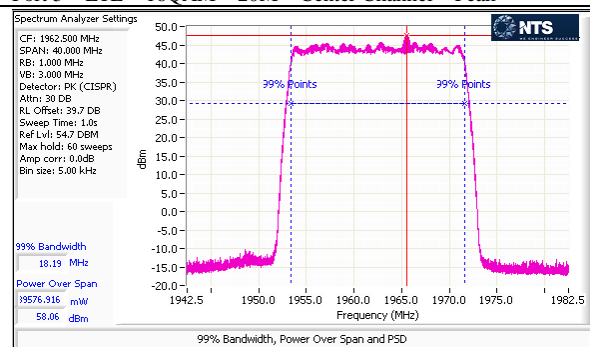


Port 5 – LTE – 16QAM – 20M – Center Channel – Average

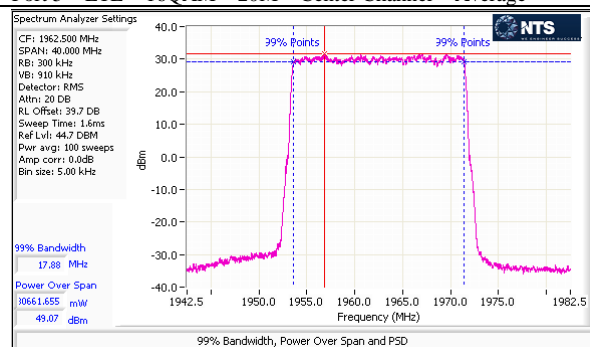


Port 5 – LTE – 64QAM – 20M – Center Channel – Peak

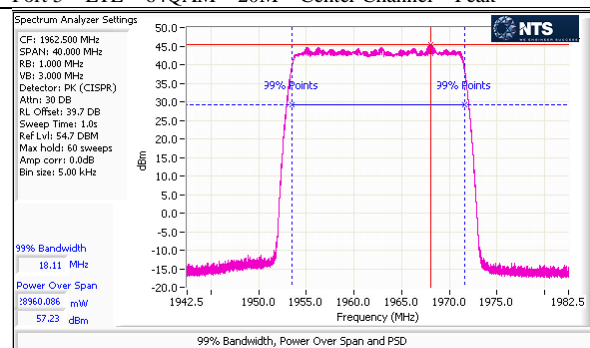


Port 5 – LTE – 64QAM – 20M – Center Channel – Average

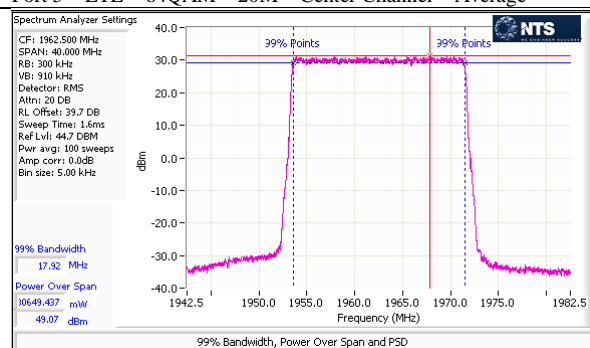


Port 5 – LTE – QPSK – 1.4M – Low Channel – Peak

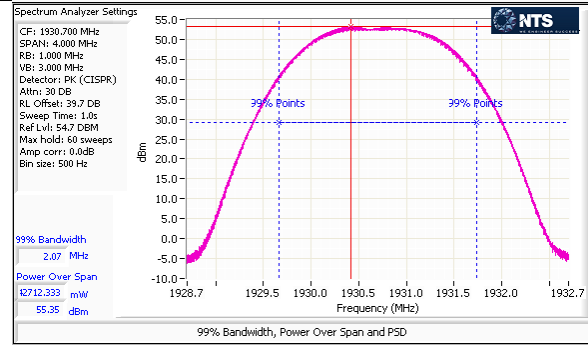


Port 5 – LTE – QPSK – 1.4M – Low Channel – Average

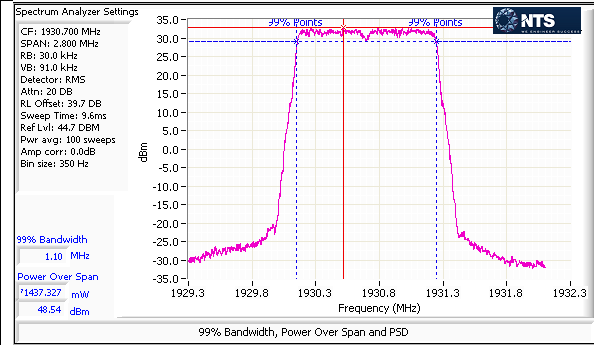


Port 5 – LTE – 16QAM – 1.4M – Low Channel – Peak

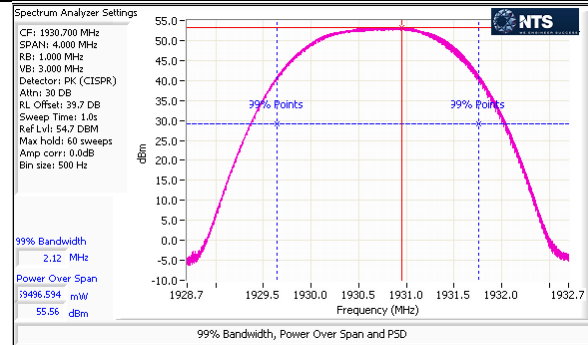


Port 5 – LTE – 16QAM – 1.4M – Low Channel – Average

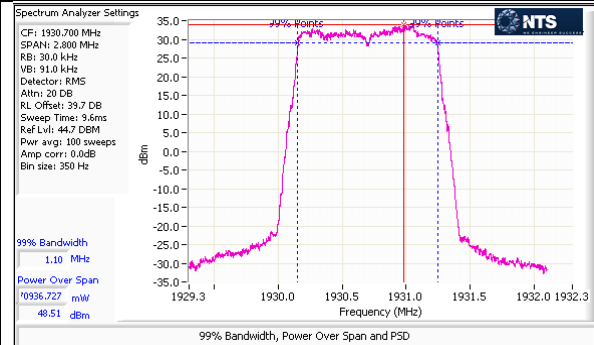


Port 5 – LTE – 64QAM – 1.4M – Low Channel – Peak

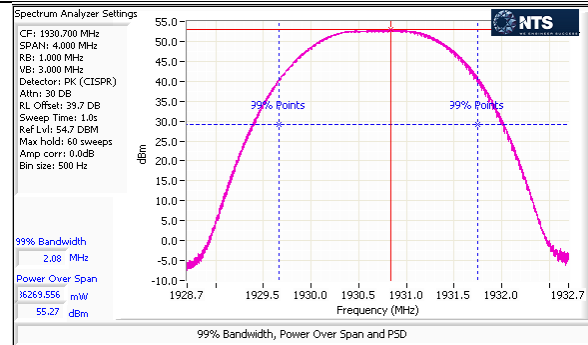


Port 5 – LTE – 64QAM – 1.4M – Low Channel – Average

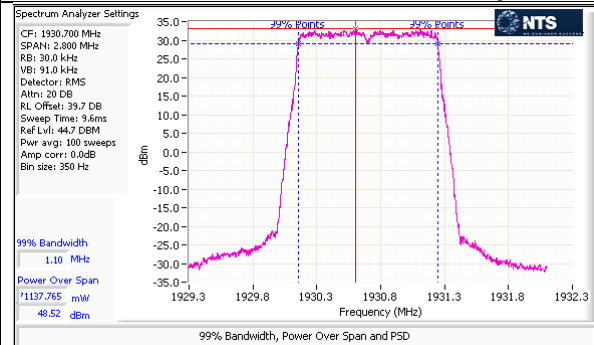


Port 5 – LTE – QPSK – 1.4M – High Channel – Peak

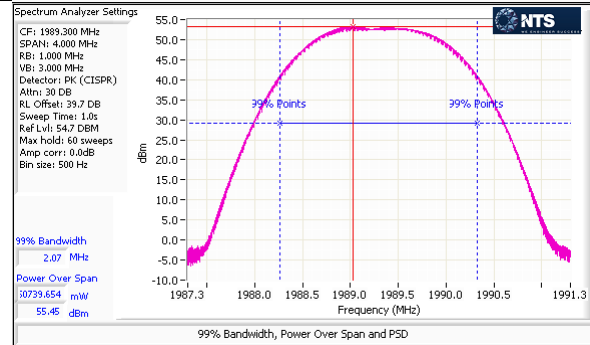


Port 5 – LTE – QPSK – 1.4M – High Channel – Average

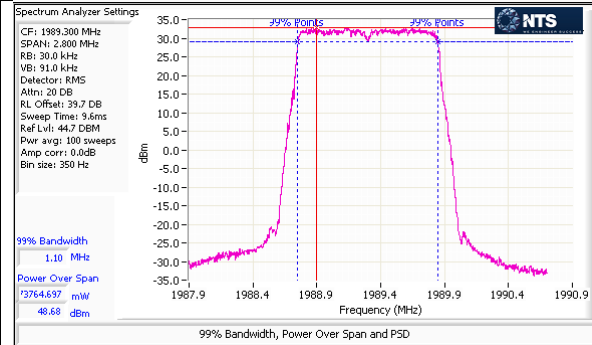


Port 5 – LTE – 16QAM – 1.4M – High Channel – Peak

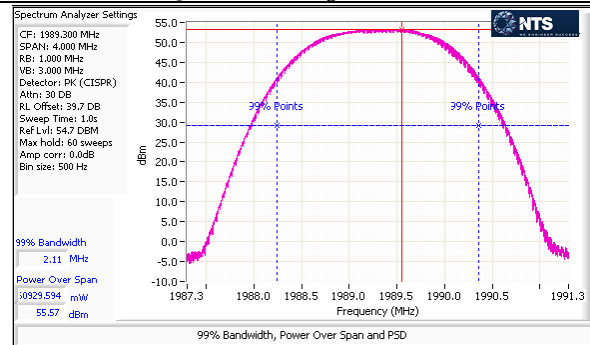


Port 5 – LTE – 16QAM – 1.4M – High Channel – Average

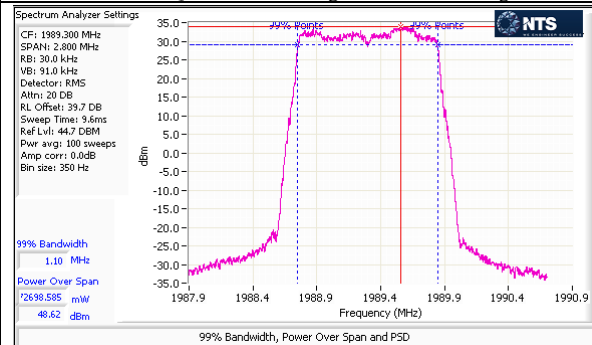


Port 5 – LTE – 64QAM – 1.4M – High Channel – Peak

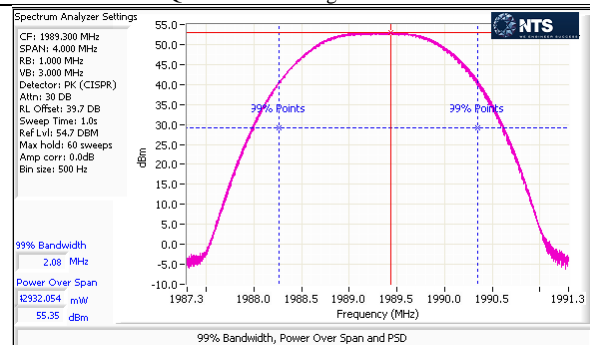


Port 5 – LTE – 64QAM – 1.4M – High Channel – Average

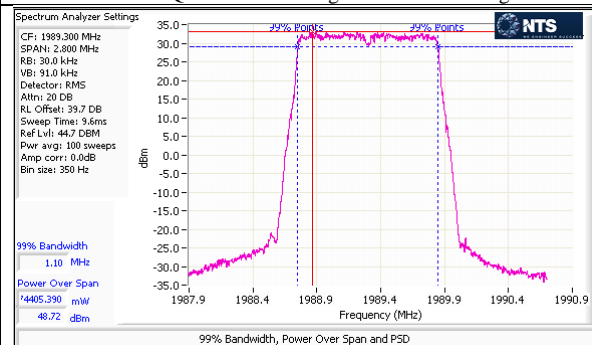


Port 5 – LTE – QPSK – 3M – Low Channel – Peak

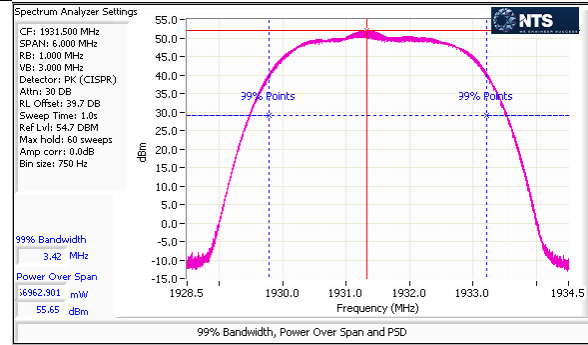


Port 5 – LTE – QPSK – 3M – Low Channel – Average

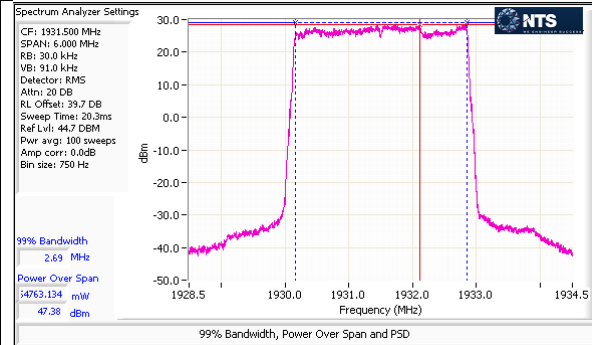


Port 5 – LTE – 16QAM – 3M – Low Channel – Peak

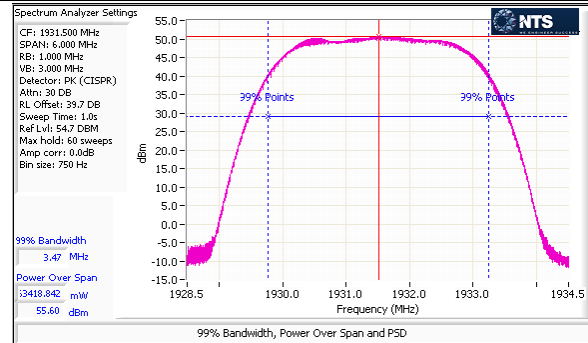


Port 5 – LTE – 16QAM – 3M – Low Channel – Average

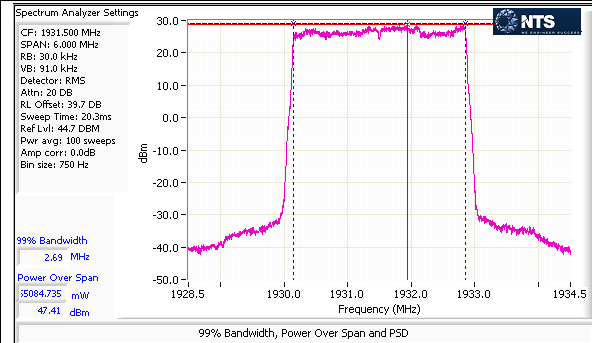



Port 5 – LTE – 64QAM – 3M – Low Channel – Peak

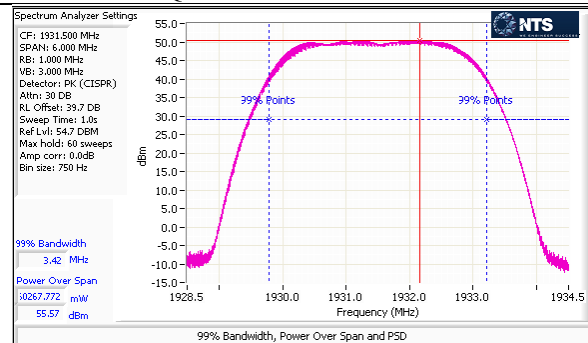



Port 5 – LTE – 64QAM – 3M – Low Channel – Average

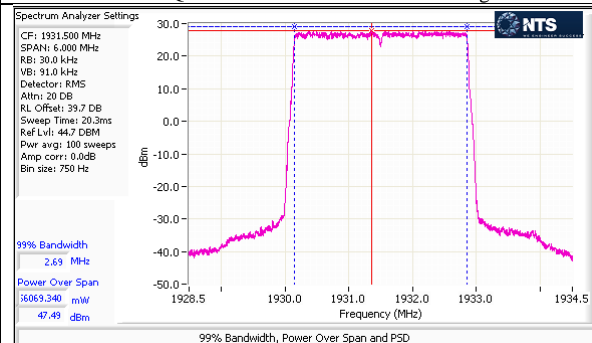

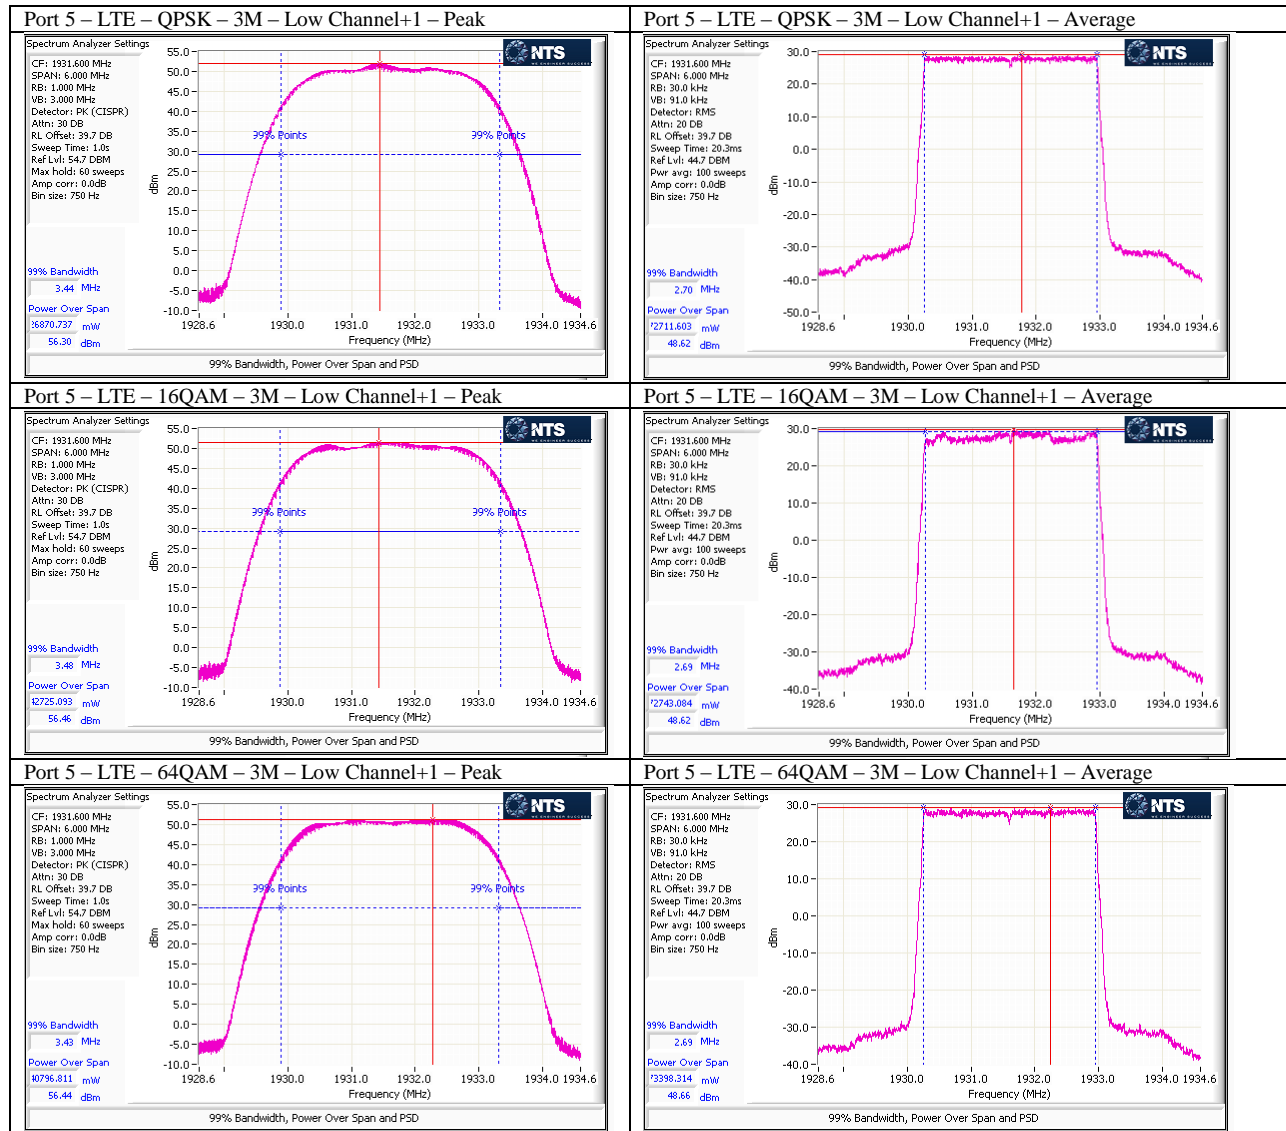


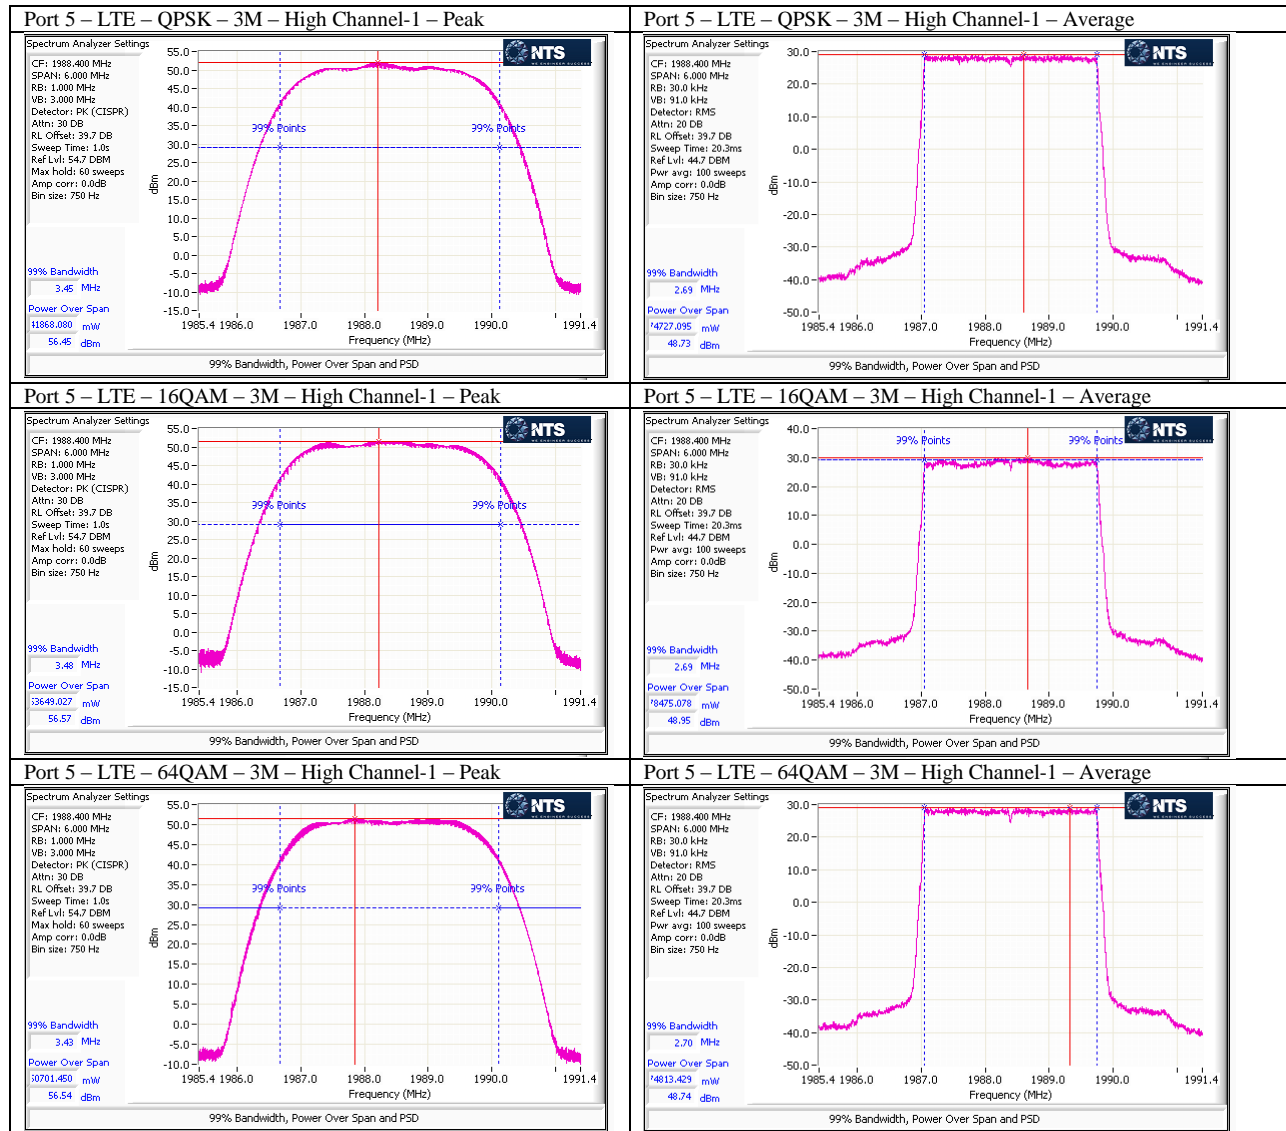

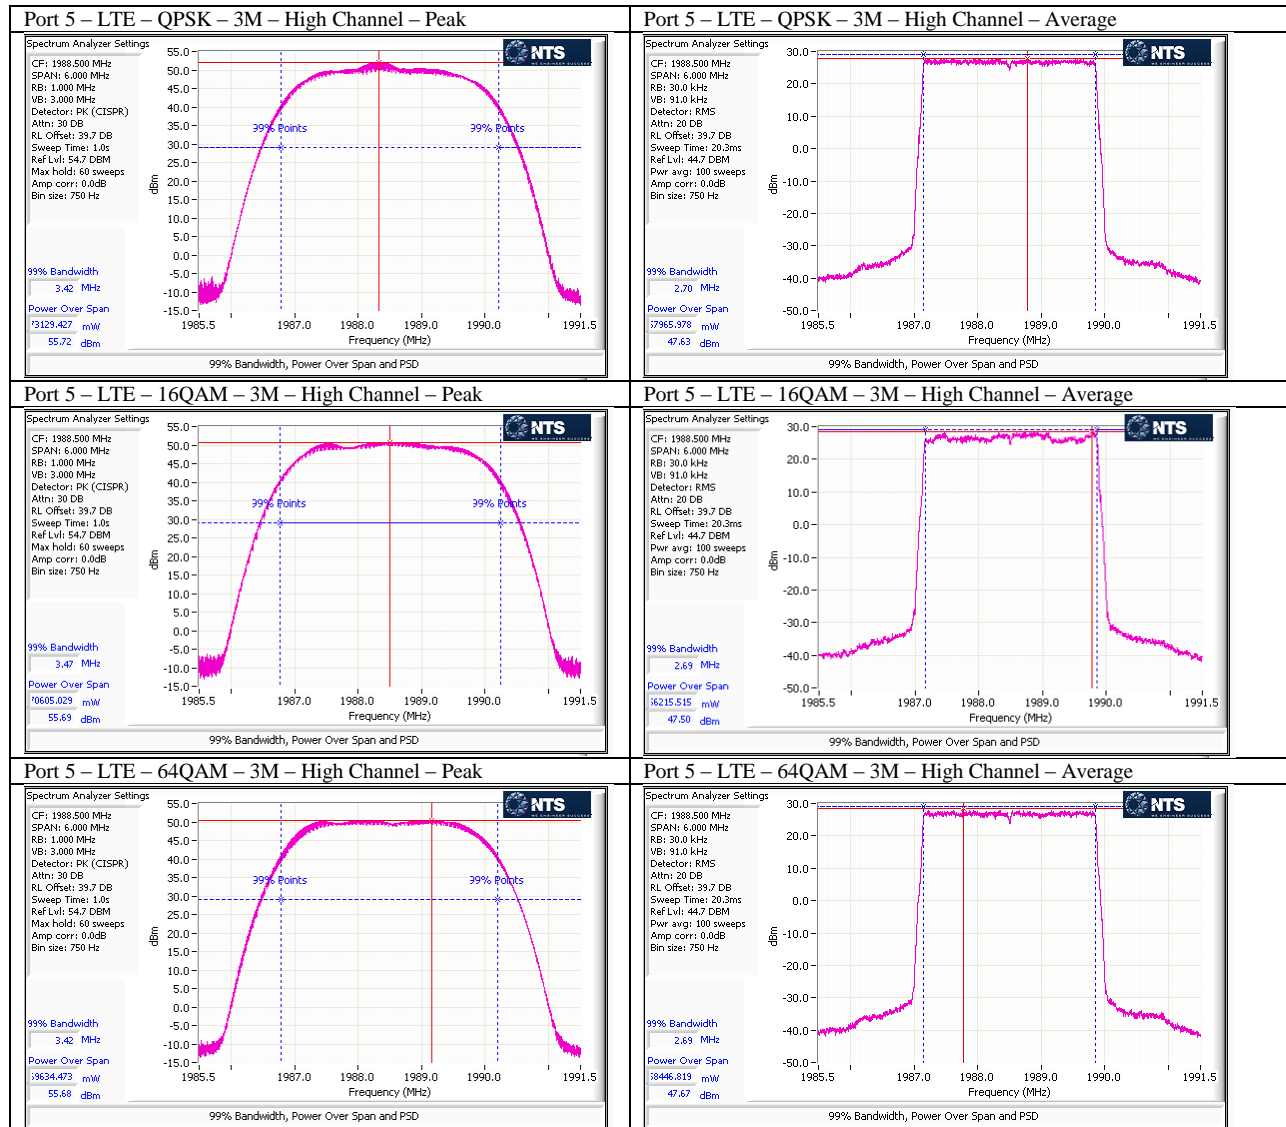


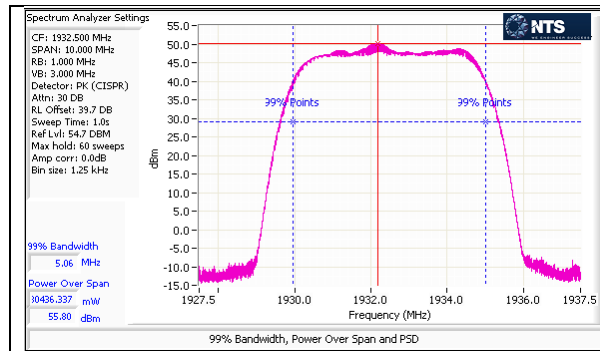


Port 5 - LTE - 16QAM - 5M - Low Channel - Peak

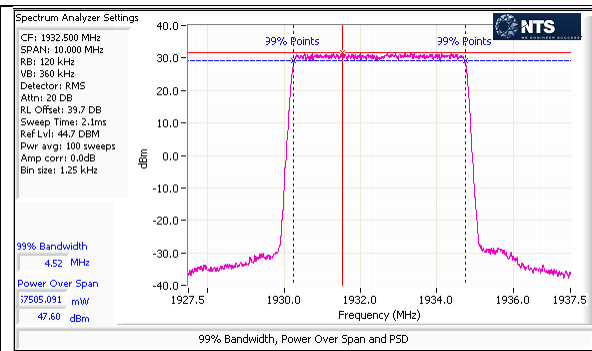


Port 5 - LTE - 16QAM - 5M - Low Channel - Average

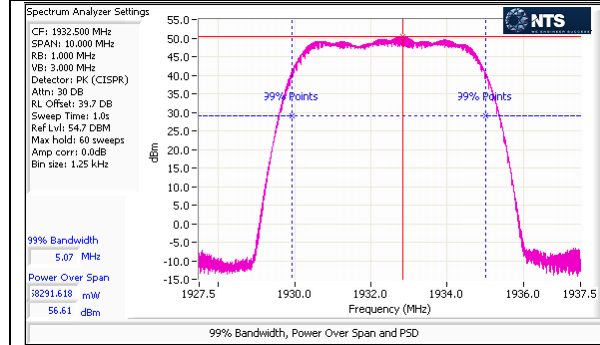


Port 5 - LTE - 64QAM - 5M - Low Channel - Peak

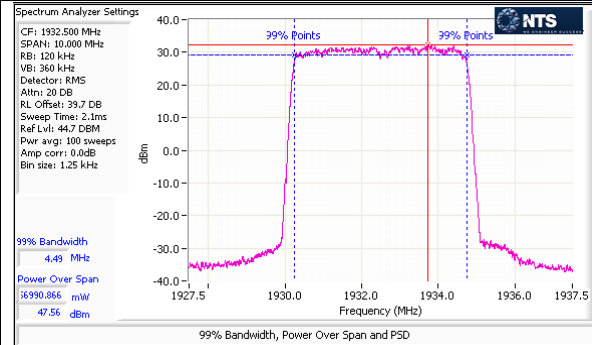



Port 5 - LTE - 64QAM - 5M - Low Channel - Average

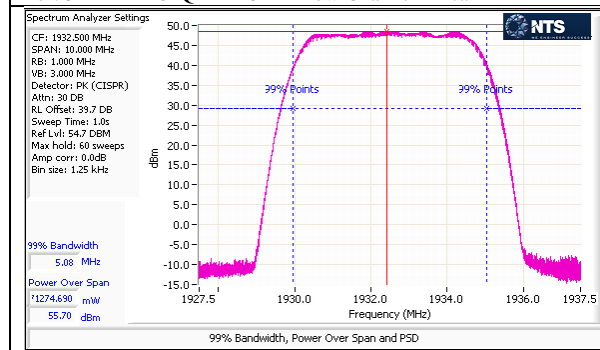

Port 5 - LTE - QPSK - 5M - Low Channel+1 - Peak


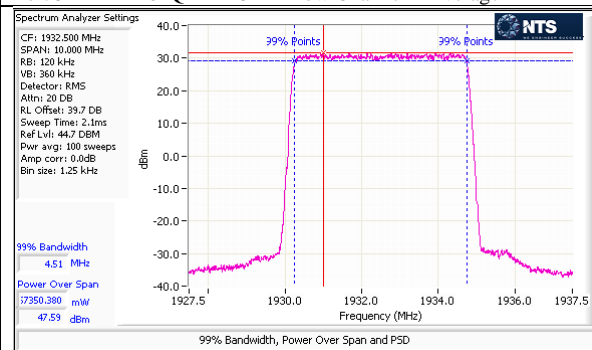


Port 5 - LTE - QPSK - 5M - Low Channel+1 - Average

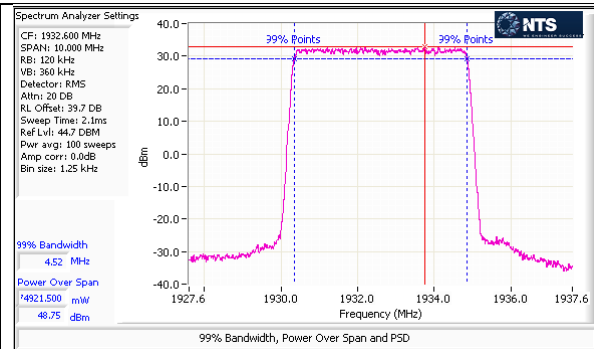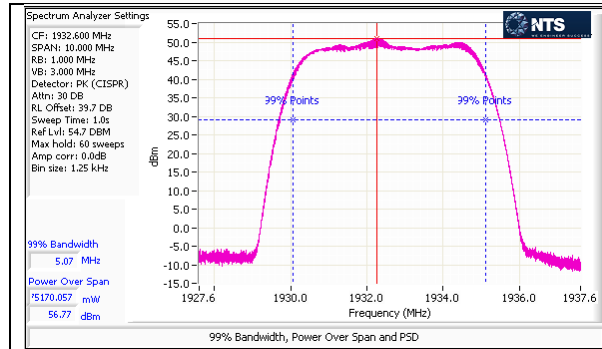



Port 5 - LTE - 16QAM - 5M - Low Channel+1 - Peak

Port 5 - LTE - 16QAM - 5M - Low Channel+1 - Average

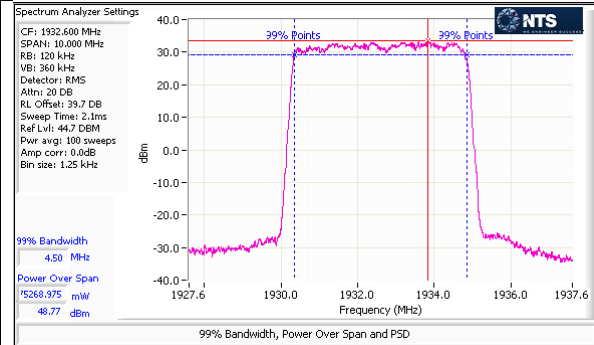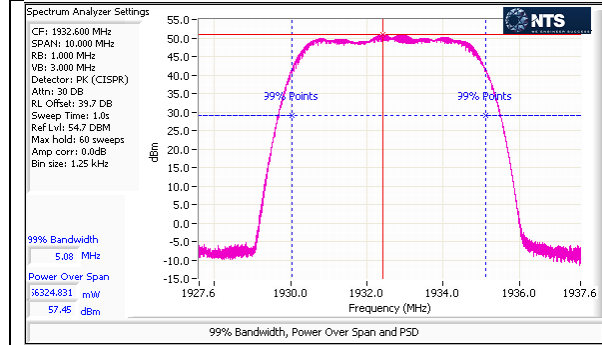


Port 5 - LTE - 64QAM - 5M - Low Channel+1 - Peak

Port 5 - LTE - 64QAM - 5M - Low Channel+1 - Average

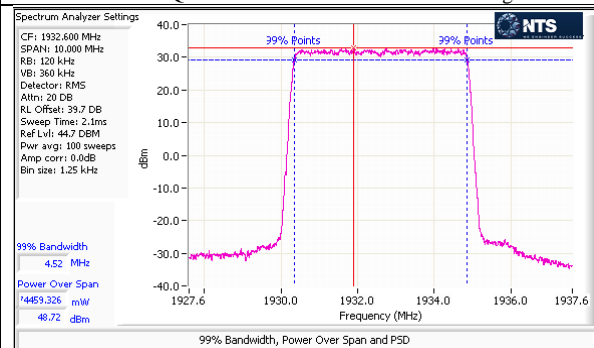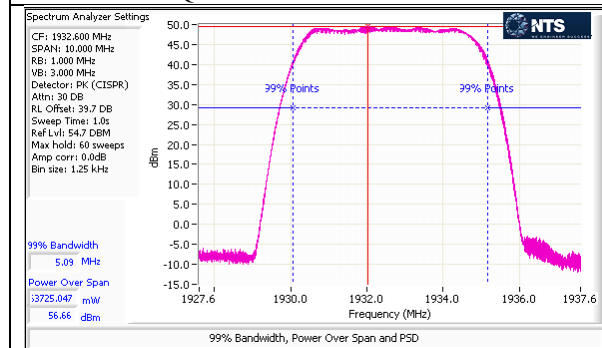


Port 5 - LTE - QPSK - 5M - High Channel-1 - Peak


Port 5 - LTE - QPSK - 5M - High Channel-1 - Average

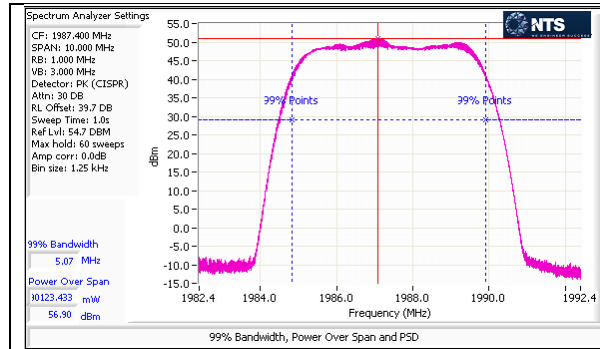


Port 5 - LTE - 16QAM - 5M - High Channel-1 - Peak

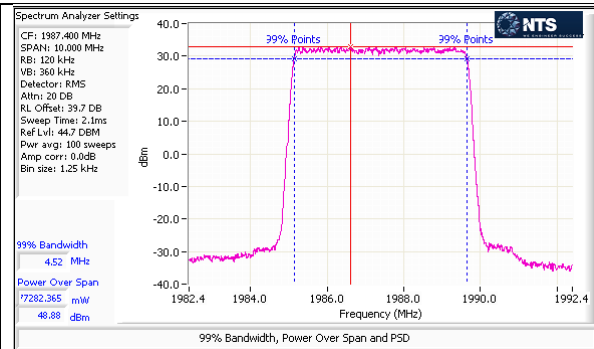


Port 5 - LTE - 16QAM - 5M - High Channel-1 - Average

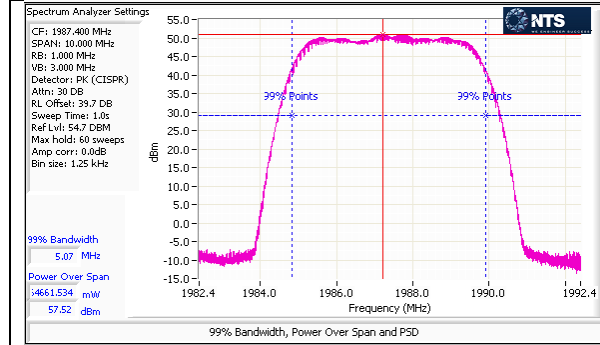


Port 5 - LTE - 64QAM - 5M - High Channel-1 - Peak

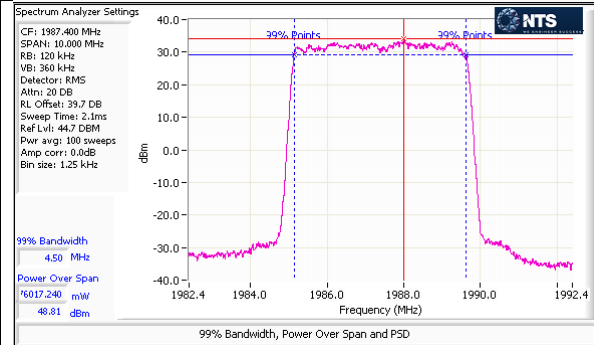


Port 5 - LTE - 64QAM - 5M - High Channel-1 - Average

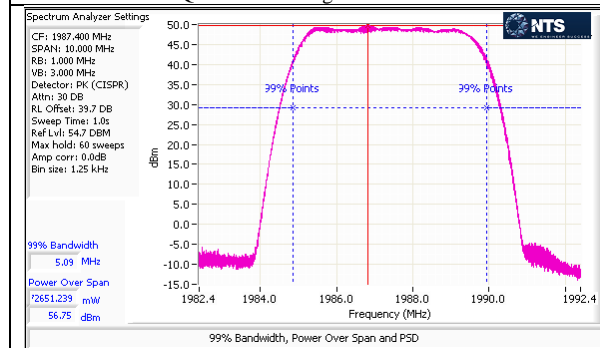


Port 5 - LTE - QPSK - 5M - High Channel - Peak

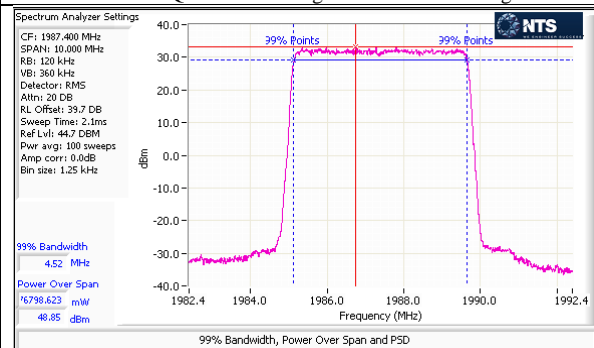


Port 5 - LTE - QPSK - 5M - High Channel - Average

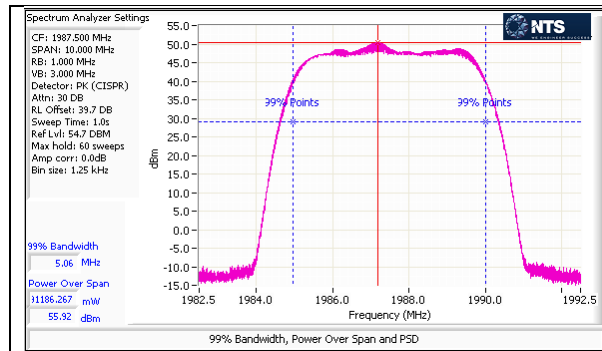


Port 5 - LTE - 16QAM - 5M - High Channel - Peak

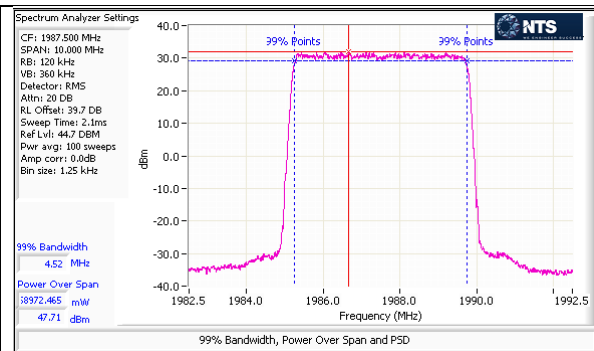



Port 5 - LTE - 16QAM - 5M - High Channel - Average

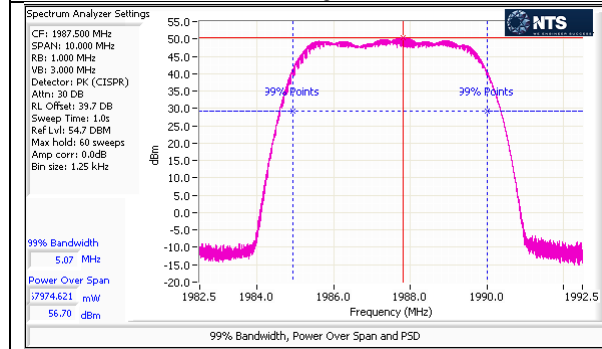

Port 5 - LTE - 64QAM - 5M - High Channel - Peak

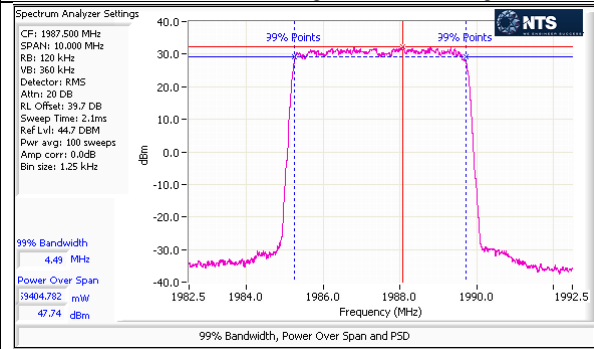


Port 5 - LTE - 64QAM - 5M - High Channel - Average

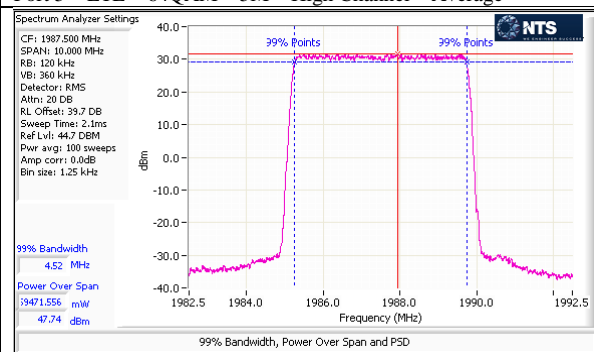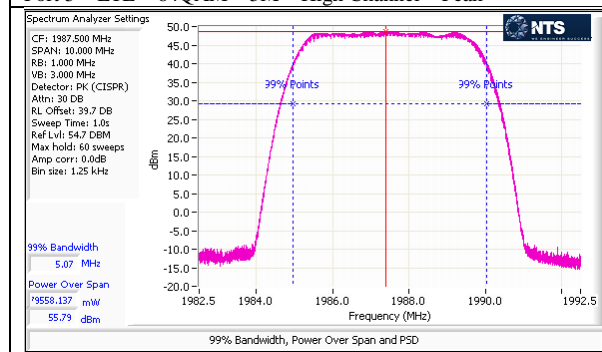


Port 5 - LTE - QPSK - 10M - Low Channel - Peak


Port 5 - LTE - QPSK - 10M - Low Channel - Average

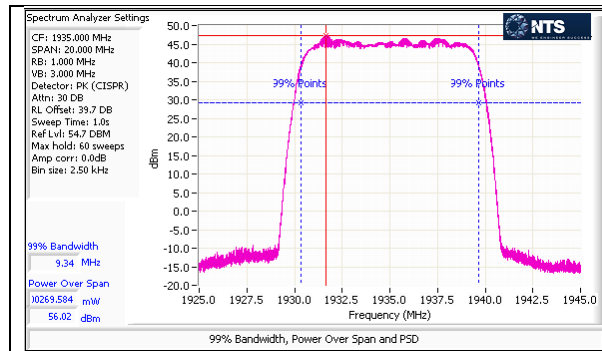


Port 5 - LTE - 16QAM - 10M - Low Channel - Peak

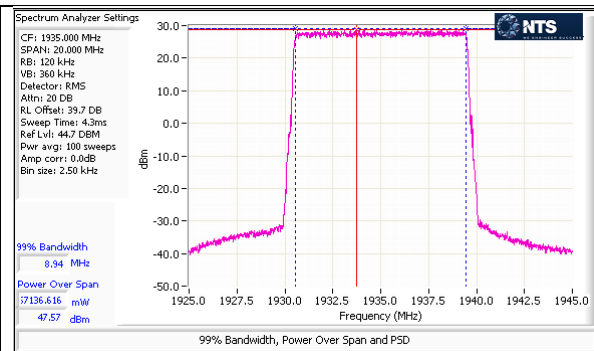


Port 5 - LTE - 16QAM - 10M - Low Channel - Average

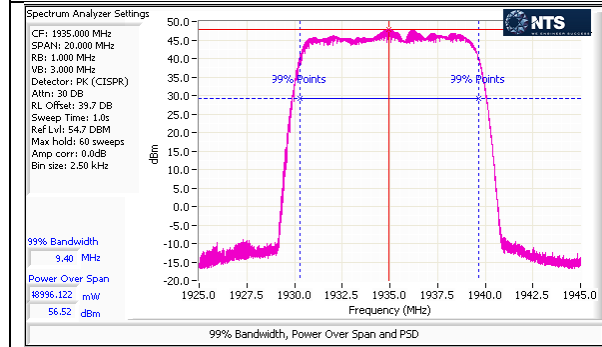


Port 5 - LTE - 64QAM - 10M - Low Channel - Peak

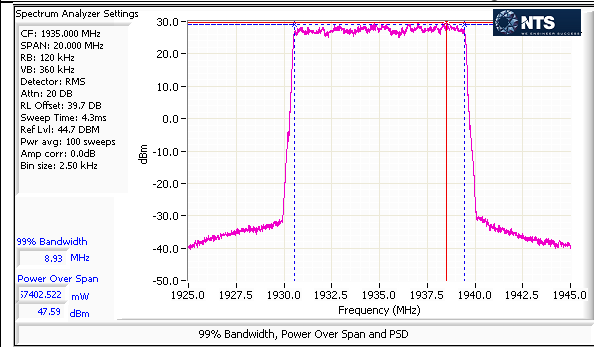


Port 5 - LTE - 64QAM - 10M - Low Channel - Average

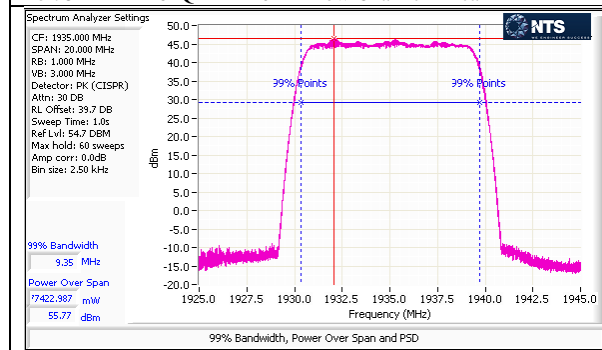


Port 5 - LTE - QPSK - 10M - Low Channel+1 - Peak

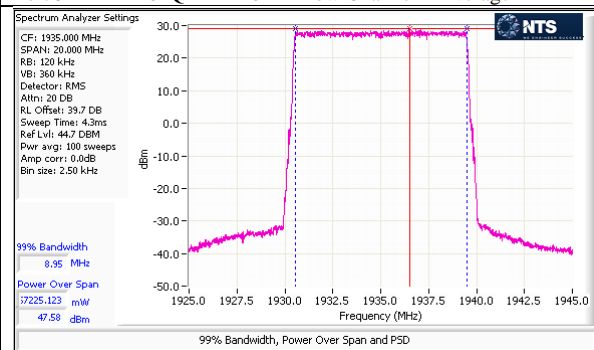


Port 5 - LTE - QPSK - 10M - Low Channel+1 - Average

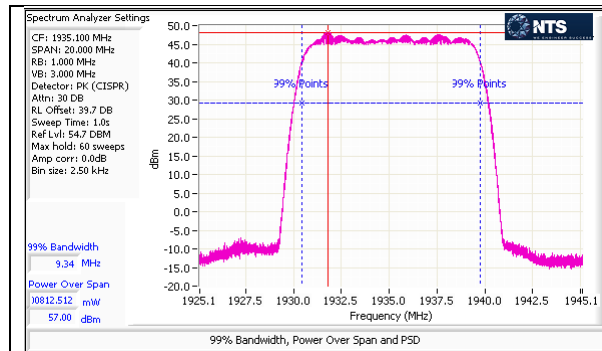


Port 5 - LTE - 16QAM - 10M - Low Channel+1 - Peak

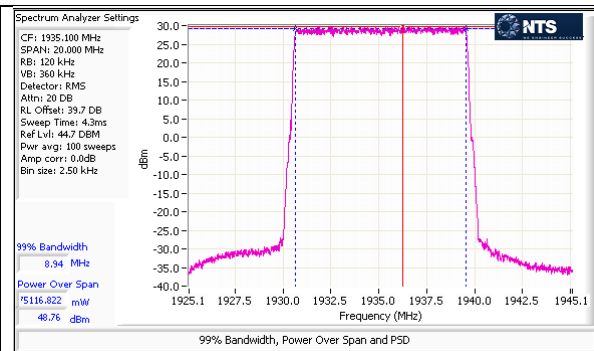


Port 5 - LTE - 16QAM - 10M - Low Channel+1 - Average

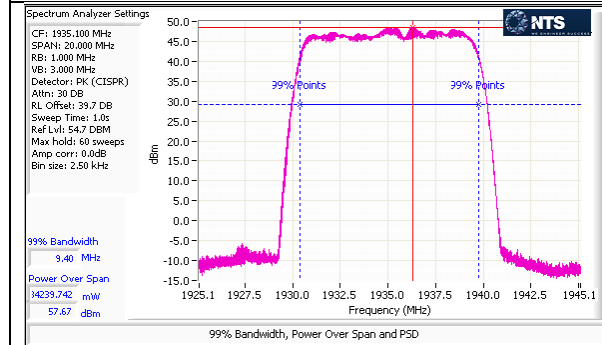


Port 5 - LTE - 64QAM - 10M - Low Channel+1 - Peak

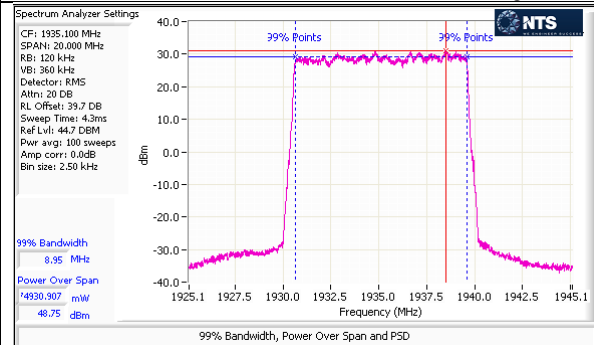


Port 5 - LTE - 64QAM - 10M - Low Channel+1 - Average

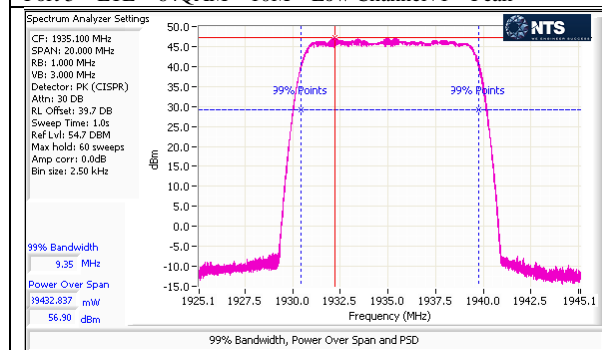


Port 5 - LTE - QPSK - 10M - High Channel-1 - Peak

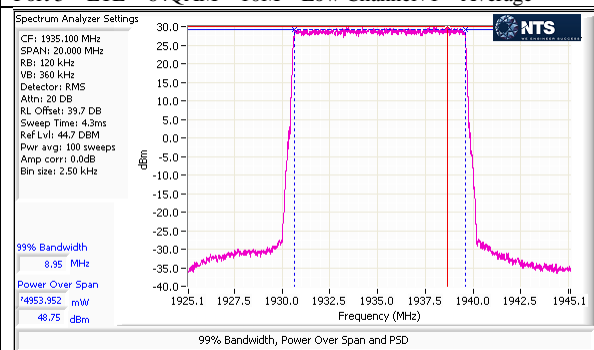


Port 5 - LTE - QPSK - 10M - High Channel-1 - Average

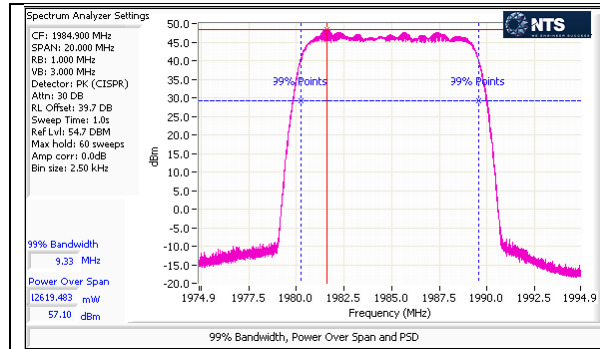


Port 5 - LTE - 16QAM - 10M - High Channel-1 - Peak

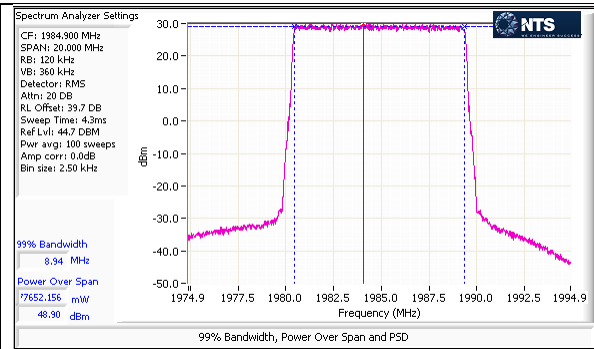


Port 5 - LTE - 16QAM - 10M - High Channel-1 - Average

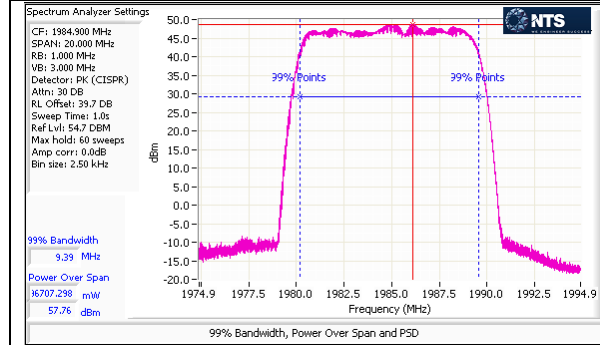


Port 5 - LTE - 64QAM - 10M - High Channel-1 - Peak

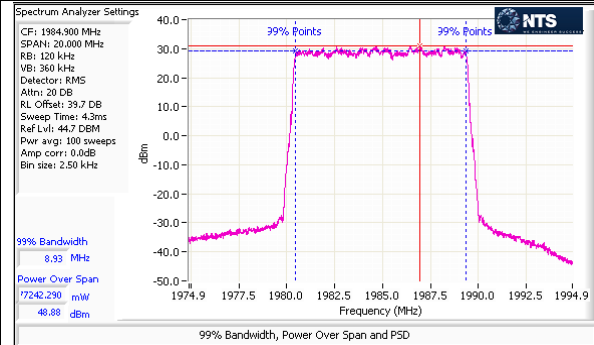


Port 5 - LTE - 64QAM - 10M - High Channel-1 - Average

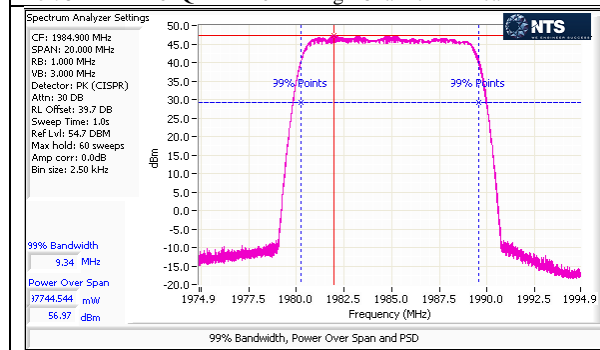


Port 5 - LTE - QPSK - 10M - High Channel - Peak

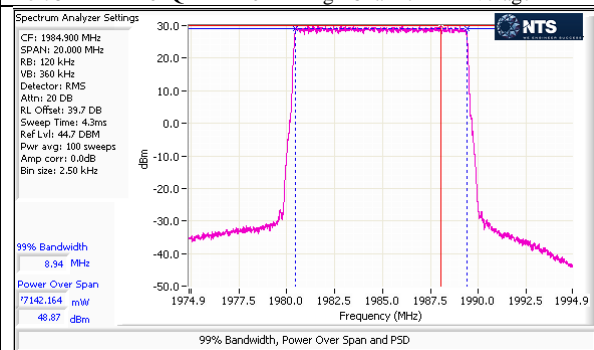


Port 5 - LTE - QPSK - 10M - High Channel - Average

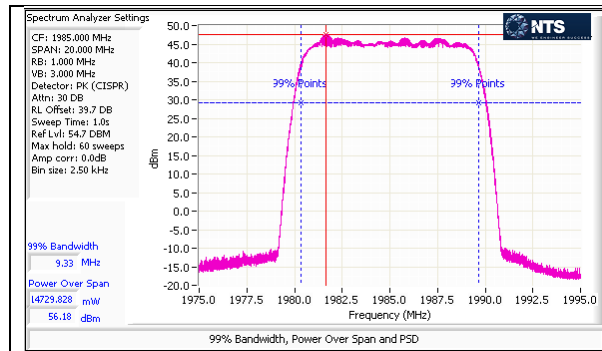


Port 5 - LTE - 16QAM - 10M - High Channel - Peak

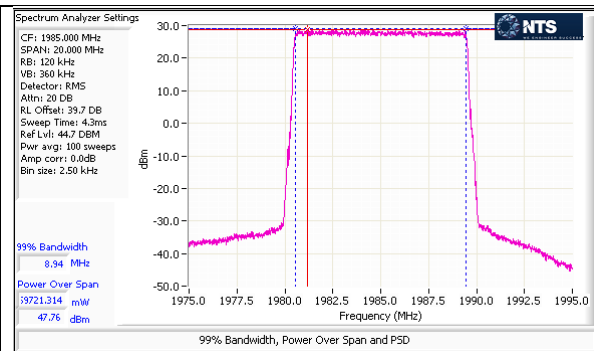



Port 5 - LTE - 16QAM - 10M - High Channel - Average

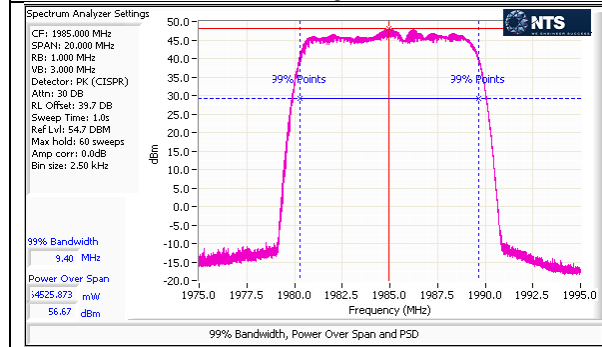


Port 5 - LTE - 64QAM - 10M - High Channel - Peak

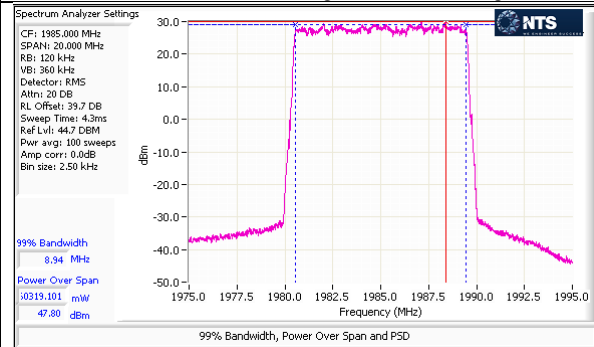


Port 5 - LTE - 64QAM - 10M - High Channel - Average

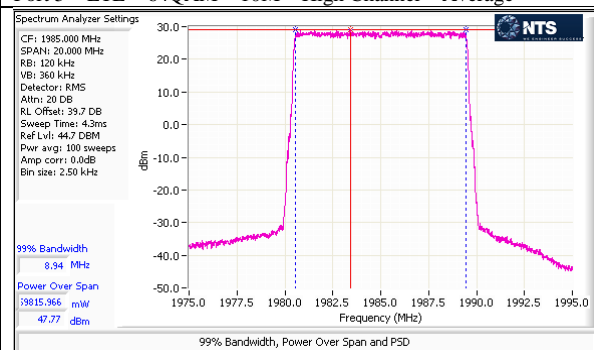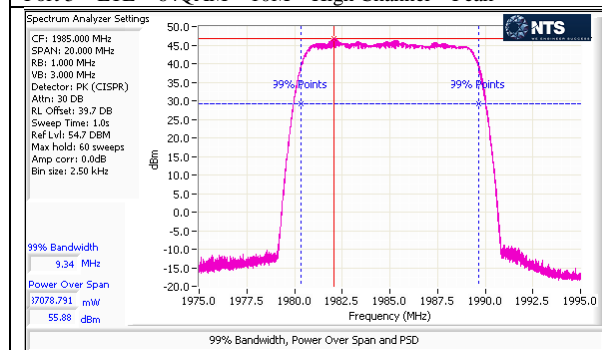


Port 5 – LTE – QPSK – 15M – Low Channel – Peak

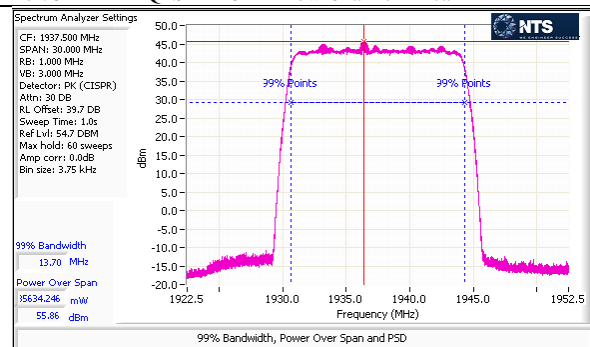


Port 5 – LTE – QPSK – 15M – Low Channel – Average

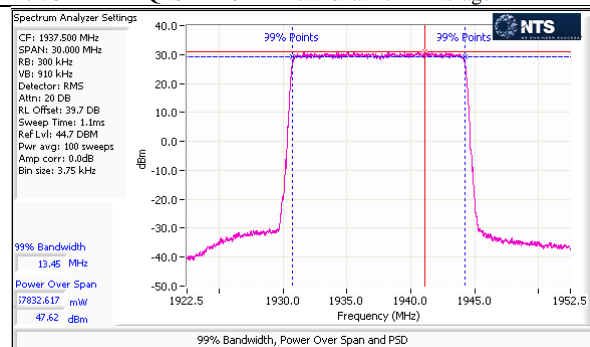


Port 5 – LTE – 16QAM – 15M – Low Channel – Peak

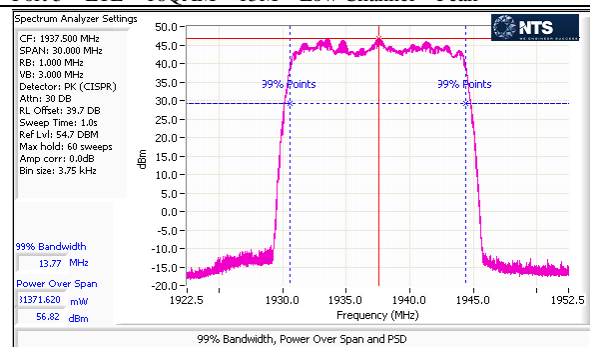


Port 5 – LTE – 16QAM – 15M – Low Channel – Average

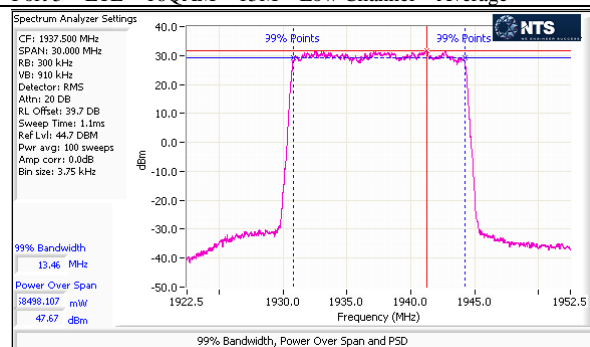




Port 5 – LTE – 64QAM – 15M – Low Channel – Peak

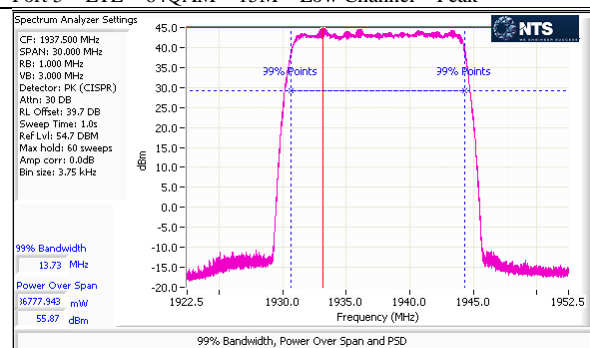


Port 5 – LTE – 64QAM – 15M – Low Channel – Average

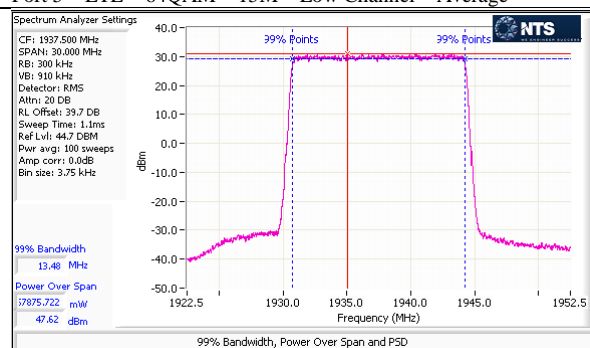


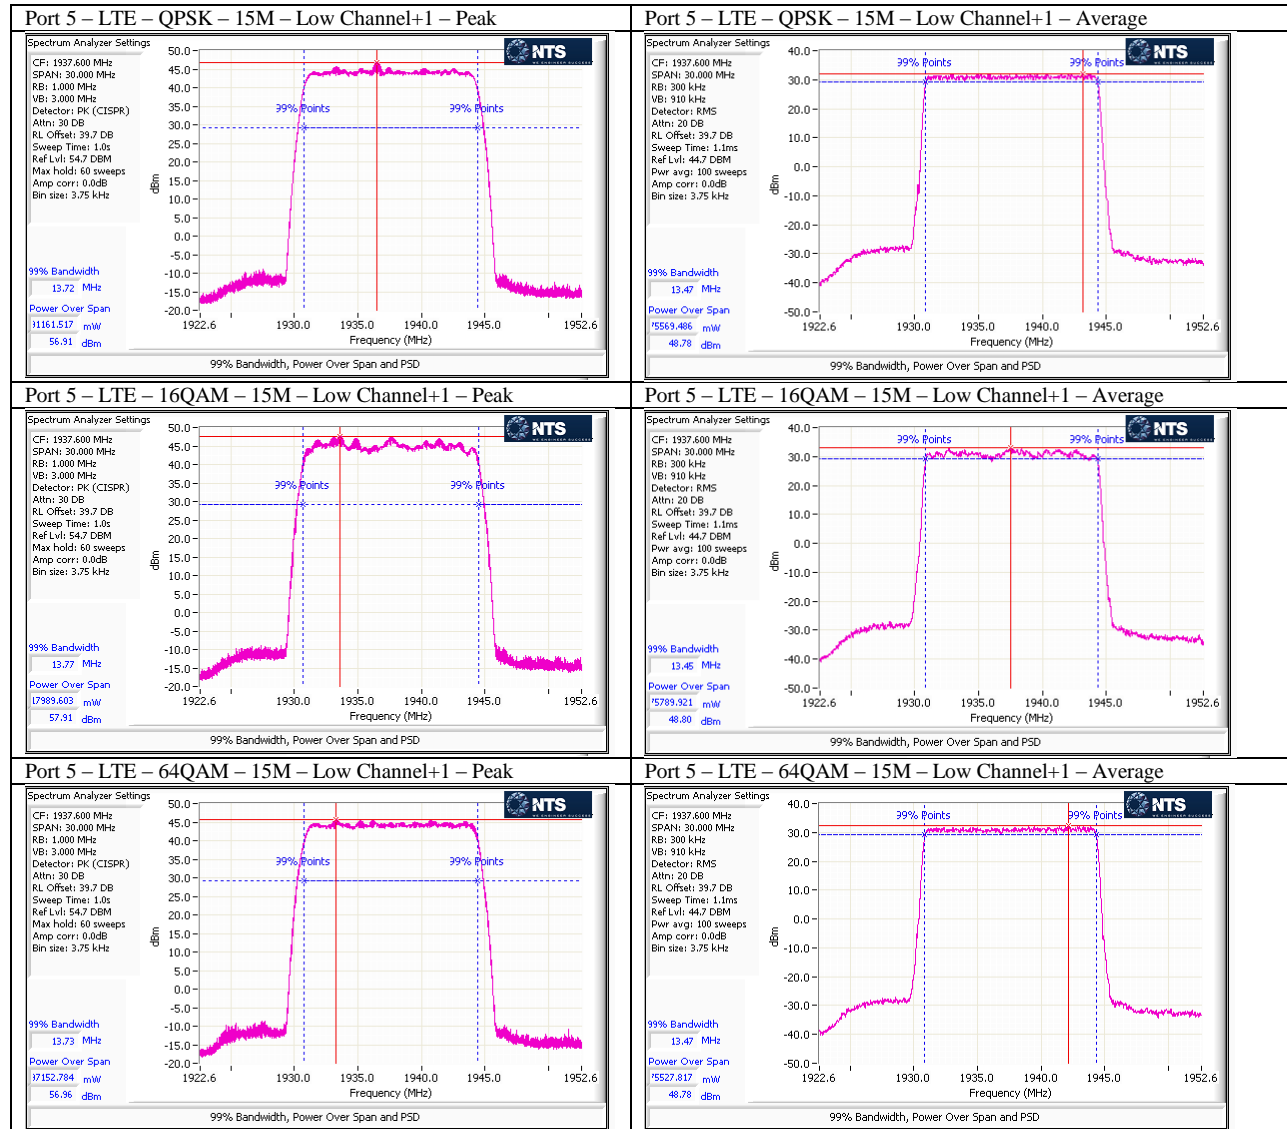

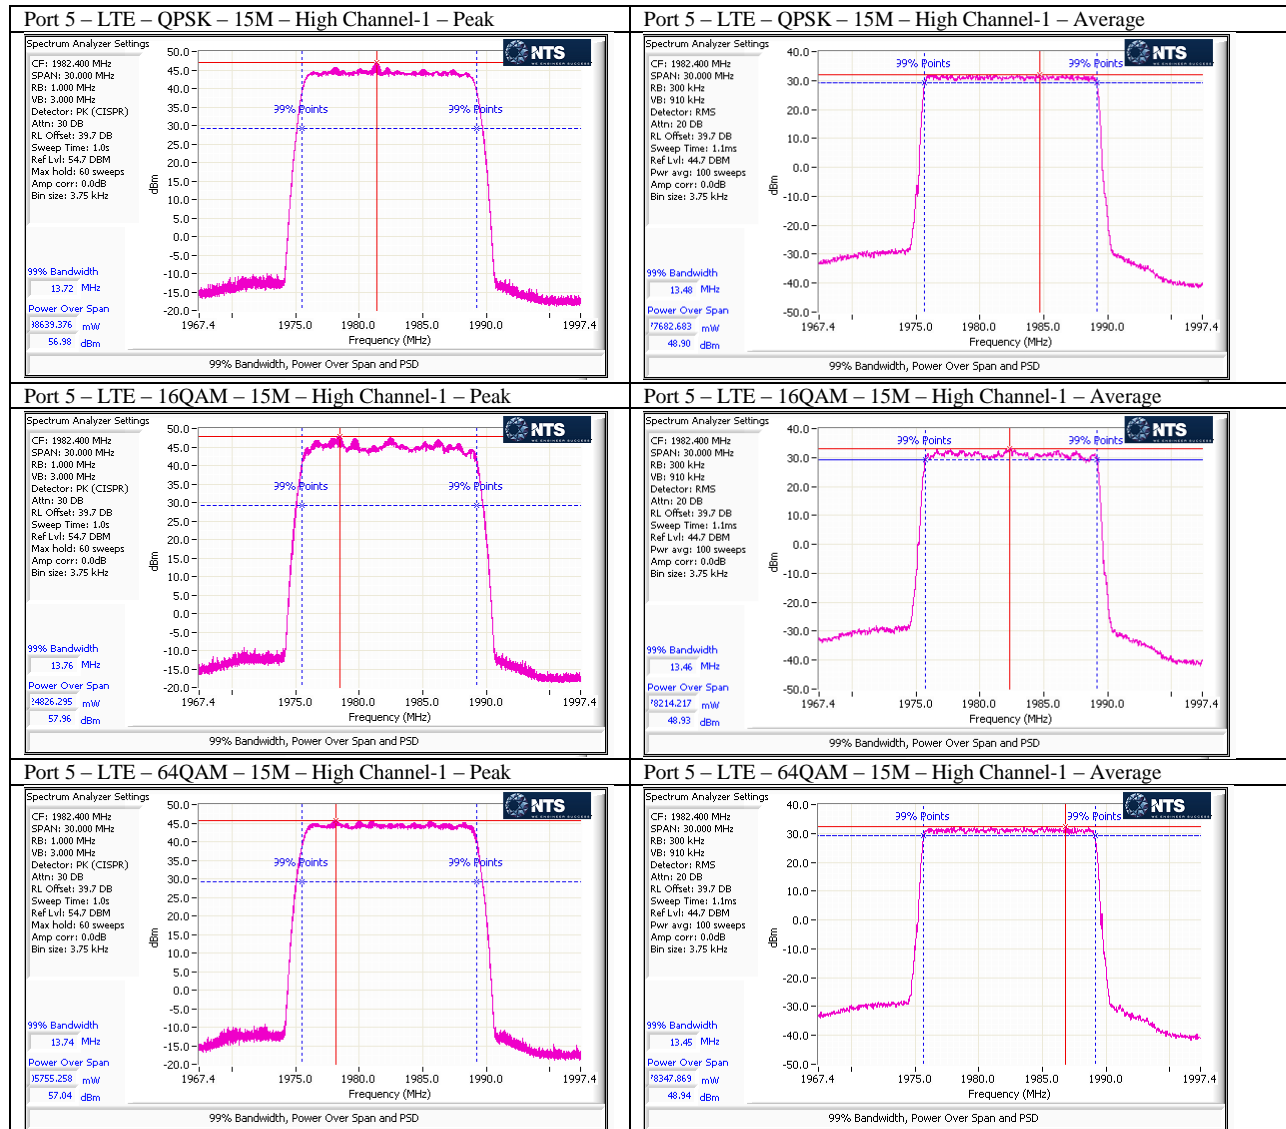


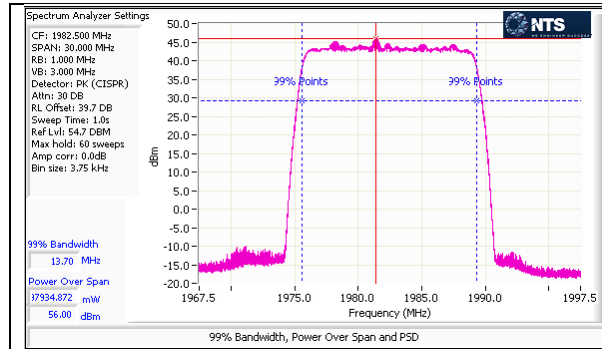


Port 5 - LTE - 16QAM - 15M - High Channel - Peak

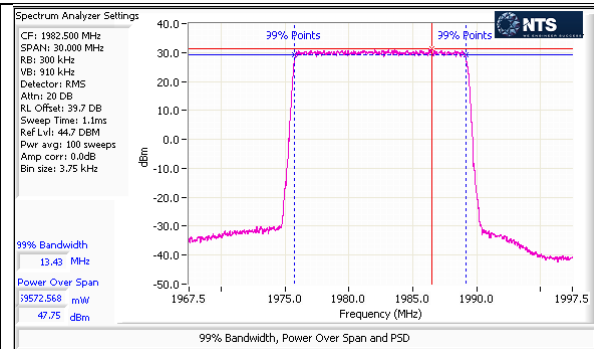


Port 5 - LTE - 16QAM - 15M - High Channel - Average

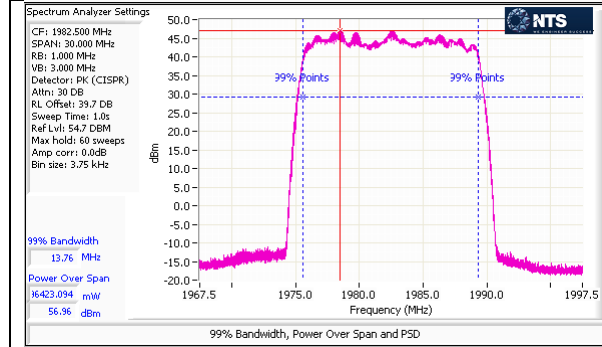


Port 5 - LTE - 64QAM - 15M - High Channel - Peak

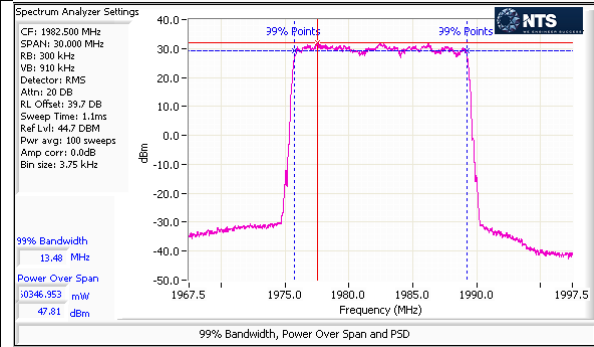

Port 5 - LTE - 64QAM - 15M - High Channel - Average

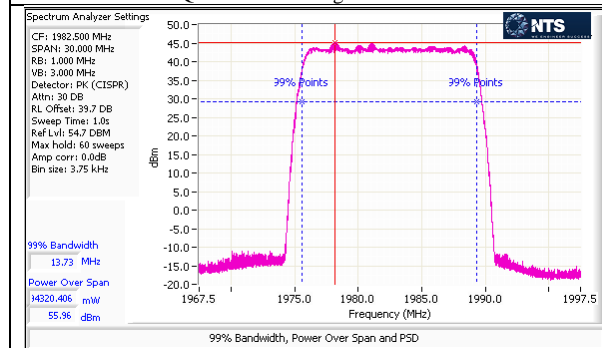


Port 5 - LTE - QPSK - 20M - Low Channel - Peak

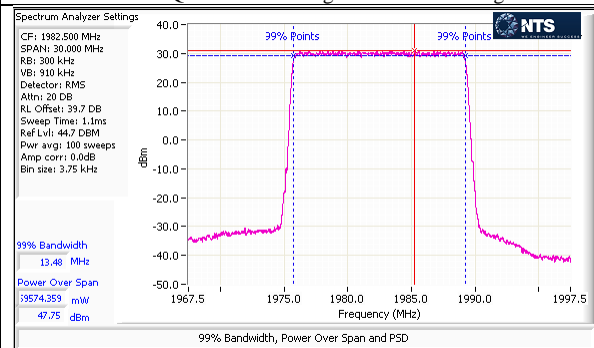


Port 5 - LTE - QPSK - 20M - Low Channel - Average

Port 5 - LTE - QPSK - 20M - Low Channel - Peak


Port 5 - LTE - QPSK - 20M - Low Channel - Average

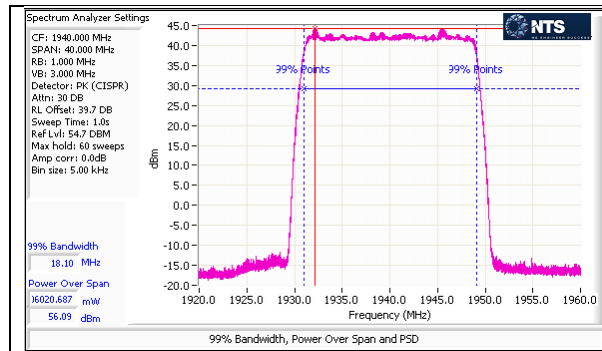


Port 5 - LTE - 16QAM - 20M - Low Channel - Peak

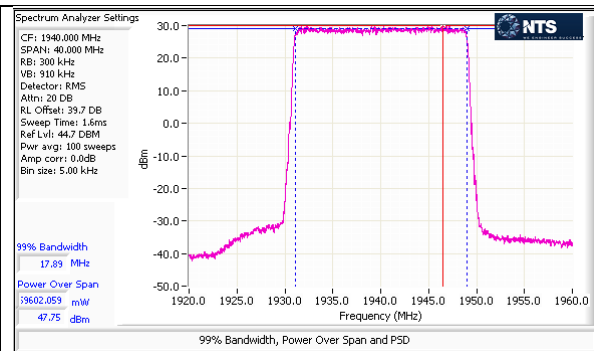


Port 5 - LTE - 16QAM - 20M - Low Channel - Average

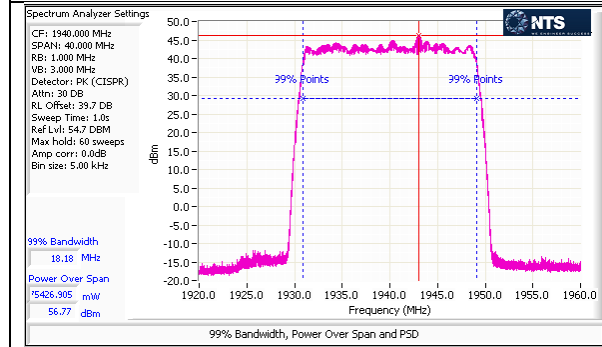


Port 5 - LTE - 64QAM - 20M - Low Channel - Peak

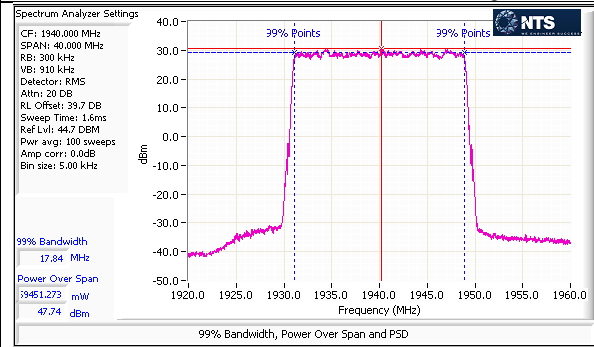


Port 5 - LTE - 64QAM - 20M - Low Channel - Average

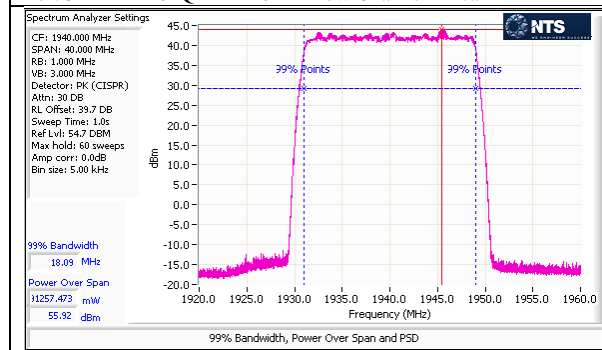


Port 5 - LTE - QPSK - 20M - Low Channel+1 - Peak

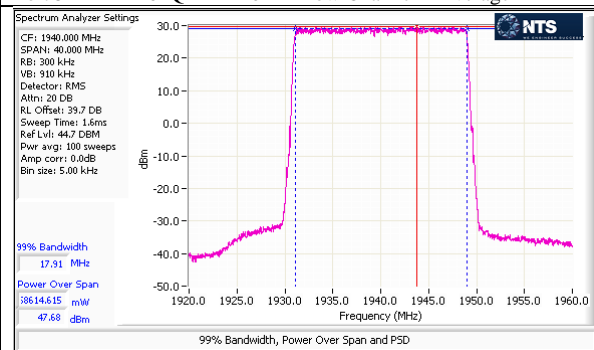


Port 5 - LTE - QPSK - 20M - Low Channel+1 - Average

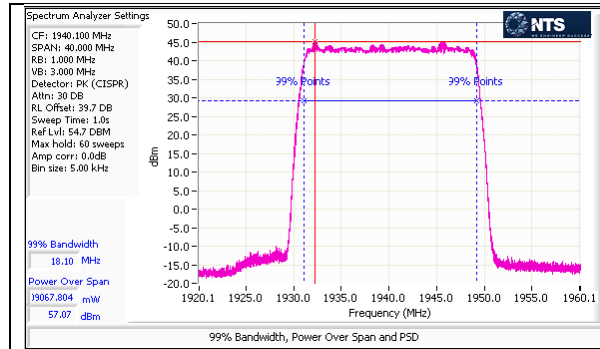


Port 5 - LTE - 16QAM - 20M - Low Channel+1 - Peak

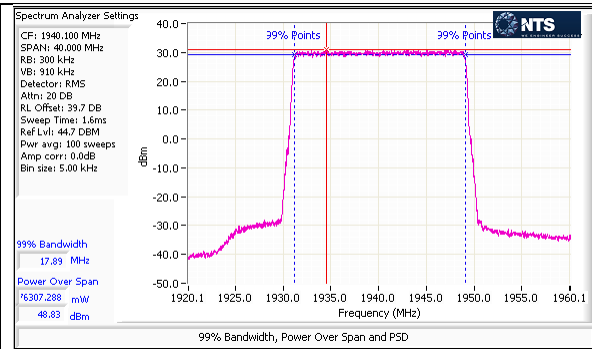


Port 5 - LTE - 16QAM - 20M - Low Channel+1 - Average

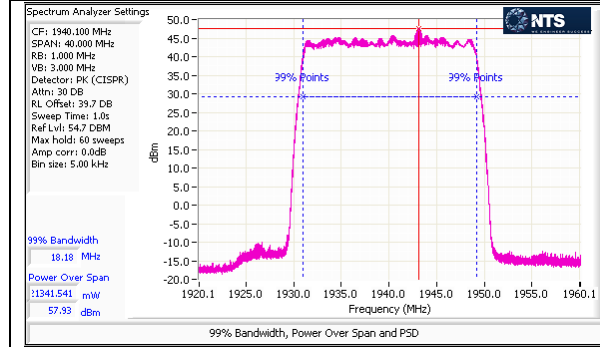


Port 5 - LTE - 64QAM - 20M - Low Channel+1 - Peak

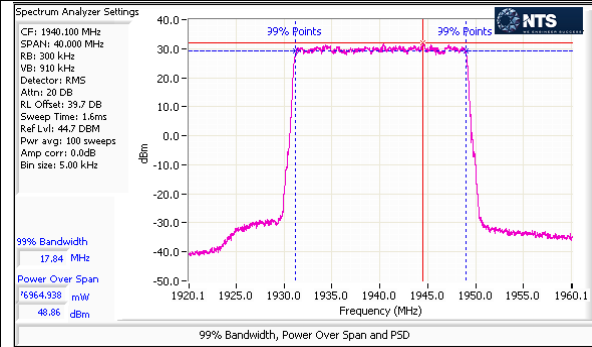

Port 5 - LTE - 64QAM - 20M - Low Channel+1 - Average

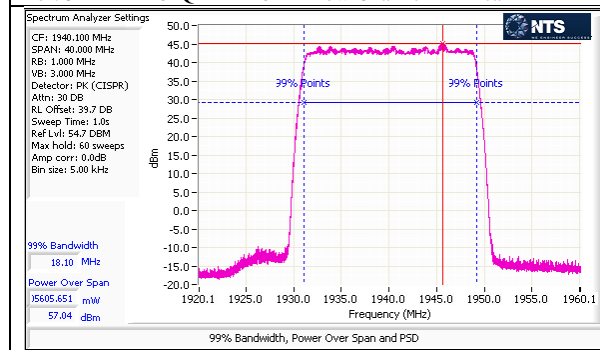



Port 5 - LTE - QPSK - 20M - High Channel-1 - Peak

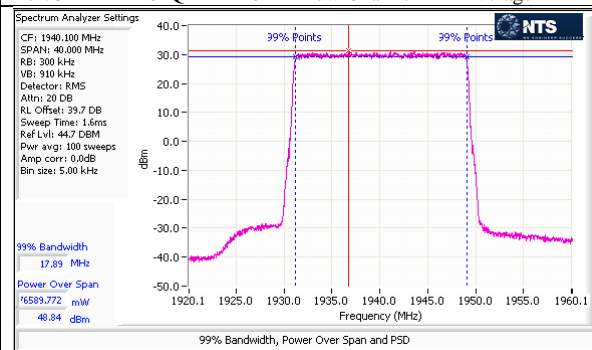

Port 5 - LTE - QPSK - 20M - High Channel-1 - Average



Port 5 - LTE - QPSK - 20M - High Channel-1 - Peak

Port 5 - LTE - QPSK - 20M - High Channel-1 - Average

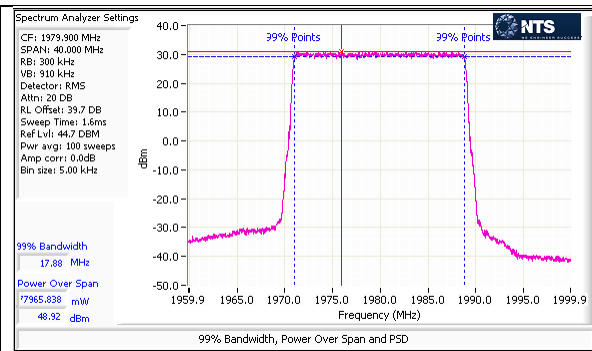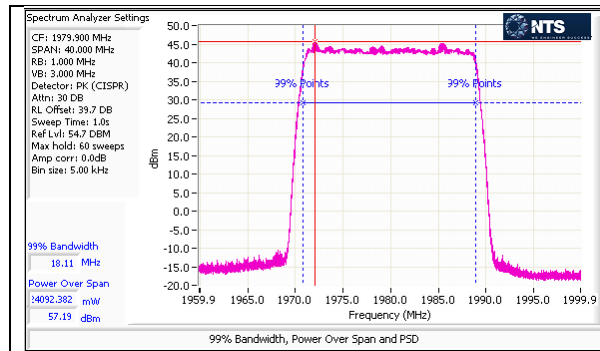



Port 5 - LTE - 16QAM - 20M - High Channel-1 - Peak

Port 5 - LTE - 16QAM - 20M - High Channel-1 - Average

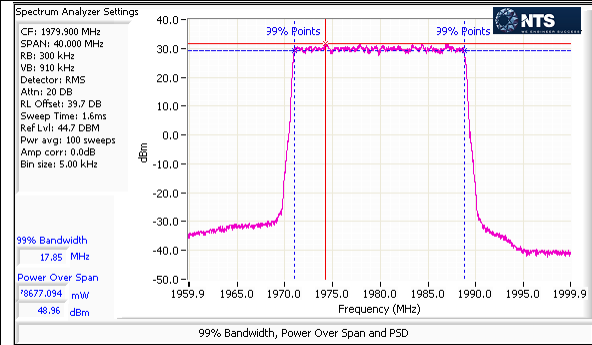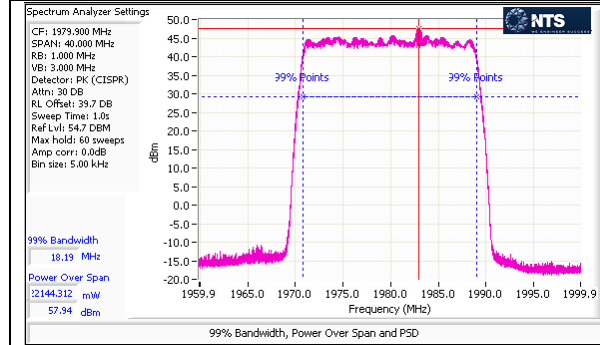


Port 5 - LTE - 64QAM - 20M - High Channel-1 - Peak

Port 5 - LTE - 64QAM - 20M - High Channel-1 - Average

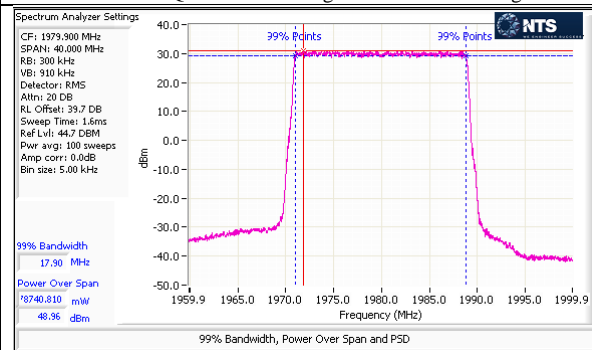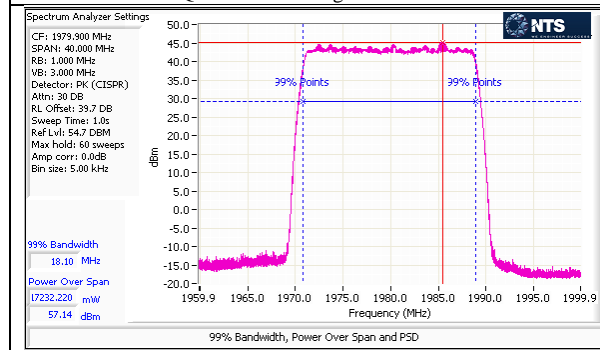


Port 5 - LTE - QPSK - 20M - High Channel - Peak


Port 5 - LTE - QPSK - 20M - High Channel - Average

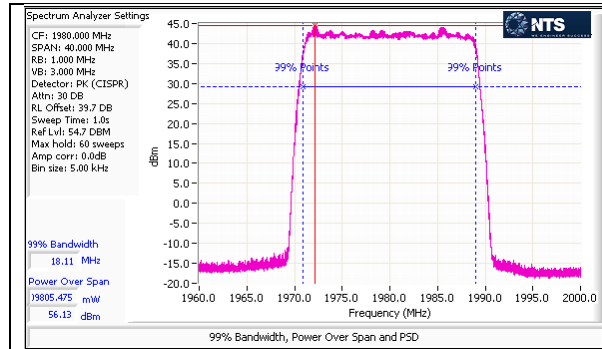


Port 5 - LTE - 16QAM - 20M - High Channel - Peak

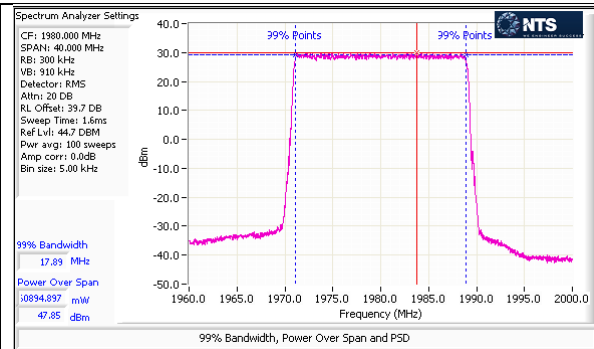



Port 5 - LTE - 16QAM - 20M - High Channel - Average

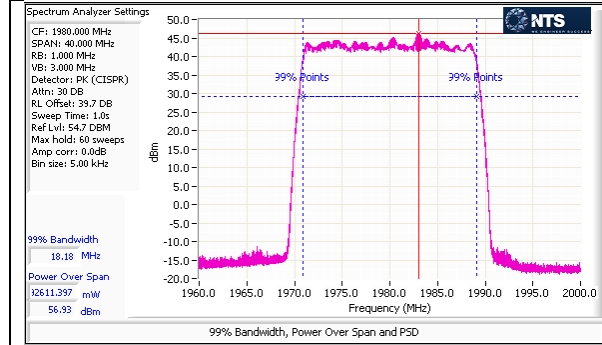

Port 5 - LTE - 64QAM - 20M - High Channel - Peak

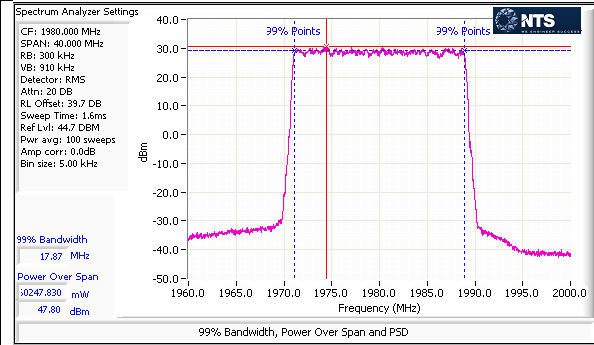

Port 5 - LTE - 64QAM - 20M - High Channel - Average

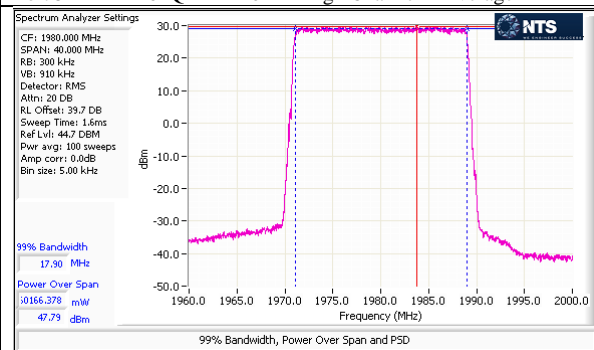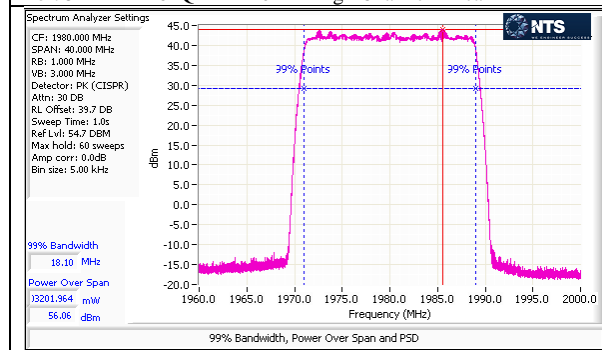

Emission Bandwidths (26dB and 99%)

Emissions bandwidths were measured on bottom and top channels for all modulations and bandwidth modes on Port 5 and results presented below.

	LTE - QPSK				LTE - 16QAM				LTE - 64QAM			
	Low		High		Low		High		Low		High	
	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)
1.4M	1.283	1.119	1.283	1.12	1.267	1.111	1.261	1.11	1.258	1.11	1.258	1.112
3M	2.922	2.709	2.929	2.71	2.921	2.709	2.924	2.709	2.919	2.713	2.919	2.714
5M	4.861	4.491	4.864	4.493	4.841	4.484	4.844	4.486	4.859	4.501	4.854	4.502
10M	9.71	8.996	9.687	8.989	9.683	9.001	9.687	8.991	9.702	8.989	9.743	8.989
15M	14.535	13.487	14.543	13.487	14.471	13.506	14.501	13.502	14.561	13.48	14.588	13.48
20M	19.43	17.958	19.365	17.953	19.32	18.013	19.325	18.013	19.41	17.958	19.41	17.953

Corresponding plots included on the following pages.