## ENGINEERING TEST REPORT



### VHF P25 AIRBORNE TRANSCEIVER Model No.: TDFM-636

FCC ID: IMA-TDFM-636

Applicant: Technisonic Industries Ltd.

> 240 Traders Blvd E, Mississauga, Ontario Canada, L4Z 1W7

Tested in Accordance With

Federal Communications Commission (FCC) CFR 47, PARTS 2 and 90 (Subpart I)

UltraTech's File No.: TIL-044FCC90

This Test report is Issued under the Authority of Tri M. Luu, Professional Engineer, Vice President of Engineering UltraTech Group of Labs

Date: June 3, 2004

Report Prepared by: Dharmajit Solanki,

RFI Engineer

Tested by: Wayne Wu, RFI Engineer Hung Trinh, EMI/RFI Technician

Test Dates: May 07 - 14, 2004 Issued Date: June 3, 2004

The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.

### **UltraTech**

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4 Tel.: (905) 829-1570 Fax.: (905) 829-8050 Website: www.ultratech Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com -labs.com

















31040/SIT

C-1376

46390-2049

200093-0

#### **TABLE OF CONTENTS**

EXHIB	IT 1.	SUBMITTAL CHECK LIST	3
EXHIB	IT 2.	INTRODUCTION	4
2.1. 2.2.		Ε ΓED SUBMITAL(S)/GRANT(S)	
2.3.		IATIVE REFERENCES	
EXHIB	IT 3.	PERFORMANCE ASSESSMENT	5
3.1.		T INFORMATION	
3.2. 3.3.		MENT UNDER TEST (EUT) INFORMATIONTECHNICAL SPECIFICATIONS	
3.3. 3.4.		OF EUT'S PORTS	
3.5.	ANCI	LARY EQUIPMENT	7
3.6.	BLOC	K DIAGRAM OF TEST SETUP	8
EXHIB	IT 4.	EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS	9
4.1.		ATE TEST CONDITIONS	
4.2.	OPER	ATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS	
EXHIB	IT 5.	SUMMARY OF TEST RESULTS	10
5.1.		TION OF TESTS	
5.2.		CABILITY & SUMMARY OF EMISSION TEST RESULTS	
5.3. 5.4.		FICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES	
EXHIB!		MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS	
6.1.	TEST	PROCEDURES	
6.2.		UREMENT UNCERTAINTIES	
6.3.		UREMENT EQUIPMENT USED:	
6.4.		WITIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:	
6.5. 6.6.		WER OUTPUT @ FCC 2.1046 & 90.205 POSURE REQUIRMENTS @ 1.1310 & 2.1091	
6.7.	FREQ	JENCY STABILITY @ FCC 2.1055 & 90.213	17
6.8.		O FREQUENCY RESPONSE @ FCC 2.1047(A) & 90.242(B)(8)	
6.9.		JLATION LIMITING @ FCC 2.1047(B) & 90.210	
6.10. 6.11.		SION MASK @ FCC 2.1049, 90.209 & 90.210SMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS @ FC	
6.12.		SMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.210	
6.13.	TRAN	SIENT FREQUENCY BEHAVIOR @ 90.214	78
EXHIB	IT 7.	MEASUREMENT UNCERTAINTY	88
7.1.	RADI	ATED EMISSION MEASUREMENT UNCERTAINTY	88
EXHIB	IT 8.	MEASUREMENT METHODS	89
8.1.		UCTED POWER MEASUREMENTS	
8.2.		ATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD	
8.3. 8.4	-	JENCY STABILITY	93

#### **ULTRATECH GROUP OF LABS**

FCC PARTS 2 & 90, SUBPART I, NON-BROADCAST RADIO TRANSCEIVERS
VHF P25 AIRBORNE TRANSCEIVER, Model: TDFM-636

8.5.	SPURIOUS EMISSIONS (CONDUCTED)	.9
8.6	TRANSIENT FREQUENCY BEHAVIOR	9

## **EXHIBIT 1. SUBMITTAL CHECK LIST**

Annex No.	Exhibit Type	<b>Description of Contents</b>	Quality Check
	Test Report	Exhibit 1: Submittal check lists	OK
		Exhibit 2: Introduction	
		Exhibit 3: Performance Assessment	
		Exhibit 4: EUT Operation and Configuration during Tests	
		Exhibit 5: Summary of test Results	
		Exhibit 6: Measurement Data	
		Exhibit 7: Measurement Uncertainty	
		Exhibit 8: Measurement Methods	
1	Test Setup Photos	Photos # 1 to 2	OK
2	External Photos of EUT	Photos # 1 to 3	OK
3	Internal Photos of EUT	Photos # 1 to 23	OK
4	Cover Letters	Letter from Ultratech for Certification Request	OK
		<ul> <li>Letter from the Applicant to appoint Ultratech to act as an agent</li> </ul>	OK
		<ul> <li>Letter from the Applicant to request for Confidentiality Filing</li> </ul>	OK
5	ID Label/Location Info	ID Label & Location of ID Label	OK
		TDFM 636 Label	OK
6	Block Diagrams	Transceiver Block Diagram	OK
7	Schematic Diagrams	Schematic Diagrams	
8	Parts List/Tune Up Info	Parts List	OK
	_	Tune Up Procedure	
9	Operational Description	Operation Description	
10	RF Exposure Info	RF Exposure Warning	OK
11	Users Manual	Installation and Operational Manual  TDFM 600/6000 Manual	OK

#### **EXHIBIT 2. INTRODUCTION**

#### 2.1. SCOPE

Reference:	FCC 47CFR Parts 2 and 90	
Title:	Telecommunication - Code of Federal Regulations, CFR 47, Parts 2 & 90	
Purpose of Test:	To gain FCC Certification Authorization for Radio operating in the frequency bands 136-174	
	MHz (12.5 kHz and 25 kHz Channel Spacing).	
<b>Test Procedures:</b> Both conducted and radiated emissions measurements were conducted in accordance w		
	American National Standards Institute ANSI C63.4 - American National Standard for Methods	
	of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic	
	Equipment in the Range of 9 kHz to 40 GHz.	

### 2.2. RELATED SUBMITAL(S)/GRANT(S)

None

#### 2.3. NORMATIVE REFERENCES

Publication	Year	Title	
FCC 47 CFR Parts 0-19, 80-End	2003	Code of Federal Regulations – Telecommunication	
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	
CISPR 22 &	2003	Limits and Methods of Measurements of Radio Disturbance Characteristics of	
EN 55022	2003	Information Technology Equipment	
CISPR 16-1	2003	Specification for Radio Disturbance and Immunity measuring apparatus and methods	

#### **EXHIBIT 3. PERFORMANCE ASSESSMENT**

### 3.1. CLIENT INFORMATION

APPLICANT		
Name: TECHNISONIC INDUSTRIES LTD.		
Address:	240 Traders Blvd E	
Mississauga, Ontario		
Canada, L4Z 1W7		
Contact Person: Richard Dalacker		
Phone #: 905-890-2113		
Fax #: 905-890-5338		
	Email Address: <u>rdalacker@til.ca</u>	

MANUFACTURER		
Name:	TECHNISONIC INDUSTRIES LTD.	
Address:	240 Traders Blvd E	
	Mississauga, Ontario	
Canada, L4Z 1W7		
Contact Person: Richard Dalacker		
	Phone #: 905-890-2113	
Fax #: 905-890-5338		
Email Address: rdalacker@til.ca		

### 3.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	TECHNISONIC
Product Name:	VHF P25 AIRBORNE TRANSCEIVER
Model Name or Number:	TDFM-636
Serial Number:	Pre-Production
Type of Equipment:	Non-Broadcast Radio Transceiver used as Mobile Station
Oscillator's Frequency	16.8 MHz
CPU's Frequencies	18 MHz, 16 MHz, 520 kHz
Transmitting/Receiving Antenna Type:	Non-integral, Antenna gain limit = 3 dBi maximum
Power Input Source:	28 V DC
<b>Primary User Functions of EUT:</b>	Voice & Data Communications using Radio Waves.

#### 3.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER		
<b>Equipment Type:</b>	[ ] Portable [ x ] Mobile [ ] Base station (fixed use)	
Intended Operating Environment:	[ ] Commercial [ ] Light Industry & Heavy Industry [ x ] Airbone	
Power Supply Requirement:	28 Vdc	
RF Output Power Rating:	1.0 Watt (low) & 10.0 Watts (High)	
<b>Operating Frequency Range:</b>	136 - 174 MHz	
Duty cycle:	50 %	
RF Output Impedance:	50 Ohms	
Modulation Type:	FM Analog & Digital	
Channel Spacing:	12.5 kHz & 25 kHz	
Occupied Bandwidth (99%):	10.0 kHz (FM voice in 12.5 kHz Channel Spacing) 15.0 kHz (FM voice in 25 kHz Channel Spacing) 9.5 kHz (FM digital in 12.5 kHz Channel Spacing)	
Maximum Data Rate:	9600 b/s	
Emission Designations*:	16K0F3E, 11K0F3E, 11K0F1D	
Antenna Connector Type:	BNC	

<sup>\*</sup> For an average case of commercial telephony, the Necessary Bandwidth is calculated as follows:

Bandwidth Calculations:

Carson's Rule for FM modulation is utilized to compute the bandwidth shown in the FCC emission designator. Carson's Rule is:  $BW = 2 \times (M+DK)$ , where M = Maximum modulating frequency, D = Deviation

1. For FM Voice Modulation:

Channel Spacing = 12.5 KHz, D = 2.5 KHz max., K = 1, M = 3 KHz

 $B_n = 2M + 2DK = 2(3) + 2(2.5)(1) = 11 \text{ KHz}$ 

Emission designation: 11K0F3E

Channel Spacing = 25 KHz, D = 5 KHz max., K = 1, M = 3 KHz

 $B_n = 2M + 2DK = 2(3) + 2(5)(1) = 16 \text{ KHz}$ 

Emission designation: 16K0F3E

2. For FM Digital Modulation: Channel Spacing = 12.5 KHz, Digital Data, D = 3.1 kHz

M = 9.6/2 kb/s, (FM modulation Level 4)

 $B_n = 2M + 2DK = 2(9.6/4) + 2(3.1)(1) = 11 \text{ KHz}$ 

Emission designation: 11K0F1D

#### 3.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	RF OUT Port	2	BNC	Shielded
2	I/O Port	1	25 PIN 'D' Female	Shielded

#### 3.5. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests: None

### 3.6. BLOCK DIAGRAM OF TEST SETUP



# EXHIBIT 4. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

#### 4.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power input source:	28 V dc

#### 4.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

Operating Modes:	The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data.	
Special Test Software:	N/A	
Special Hardware Used:	N/A	
Transmitter Test Antenna:	The EUT is tested with the transmitter antenna ports (VHF1&2) terminated to a 50 Ohms RF Load.	

<b>Transmitter Test Signals</b>	
Frequency Band(s):	Near lowest, near middle & near highest frequencies in each frequency bands that the transmitter covers:
■ 136-174 MHz band:	■ 136.0, 155.0 and 174.0 MHz
Transmitter Wanted Output Test Signals:	
<ul> <li>RF Power Output (measured maximum output power):</li> </ul>	• 9.9 Watts (conducted)
<ul><li>Normal Test Modulation</li><li>Modulating signal source:</li></ul>	<ul><li>FM</li><li>External analog source and Internal data source</li></ul>

#### **EXHIBIT 5. SUMMARY OF TEST RESULTS**

#### 5.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

• Radiated Emissions were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario.

The above sites have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: February 17, 2004.

#### 5.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS

FCC PARAGRAPH.	TEST REQUIREMENTS	APPLICABILITY (YES/NO)	
90.205 & 2.1046	RF Power Output	Yes	
1.1307, 1.1310, 2.1091 & 2.1093	RF Exposure Limit	Yes	
90.213 & 2.1055	Frequency Stability	Yes	
90.242(b)(8) & 2.1047(a)	Audio Frequency Response	Not applicable to new standard. However, tests are conducted under FCC's recommendation.	
90.210 & 2.1047(b)	Modulation Limiting	Yes	
90.210 & 2.1049	Emission Limitation & Emission Mask	Yes	
90.210, 2.1057 & 2.1051	Emission Limits - Spurious Emissions at Antenna Terminal	Yes	
90.210, 2.1057 & 2.1053	Emission Limits - Field Strength of Spurious Emissions	Yes	
90.214	Transient Frequency Behavior Yes		

VHF P25 AIRBORNE TRANSCEIVER, Model No.: TDFM-636, by TECHNISONIC INDUSTRIES LTD. has also been tested and found to comply with FCC Part 15, Subpart B - Radio Receivers and Class A Digital Device. The engineering test report has been documented and kept in file and it is available anytime upon FCC request.

## 5.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

#### 5.4. DEVIATION OF STANDARD TEST PROCEDURES

None

# EXHIBIT 6. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

#### 6.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in Exhibit 8 of this report

#### 6.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

#### 6.3. MEASUREMENT EQUIPMENT USED:

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4:2003 and CISPR 16-1.

## 6.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:

The essential function of the EUT is to correctly communicate data to and from radios over RF link.

#### 6.5. RF POWER OUTPUT @ FCC 2.1046 & 90.205

#### 6.5.1. Limits @ FCC 90.205

Please refer to FCC CFR 47, Part 90, Subpart I, Para. 90.205 for specification details.

#### 6.5.2. Method of Measurements


Refer to Exhibit 8, § 8.1 (Conducted) and 8.2 (Radiated) of this report for measurement details

#### 6.5.3. Test Equipment List

<b>Test Instruments</b>	Manufacturer	Model No.	Serial No.	Frequency Range
Attenuator(s)	Weinschel Corp	24-20-34	BJ2357	DC – 8.5 GHz
Power Meter	Hewlett Packard	436A	1725A02249	10 kHz – 50 GHz, sensor dependent
Power Sensor	Hewlett Packard	8481A	2702A68983	10 MHz – 18 GHz

#### 6.5.4. Test Arrangement

• Power at RF Power Output Terminals



#### 6.5.5. Test Data

Transmitter Output Channel	Fundamental Frequency (MHz)	Measured (Average) High Power (Watts)	Power Rating (Watts)
Lowest	136.0	9.57	10.0
Middle	155.0	9.91	10.0
Highest	174.0	9.89	10.0

Transmitter Output Channel	Fundamental Frequency (MHz)	Measured (Average) Low Power (Watts)	Power Rating (Watts)
Lowest	136.0	0.87	1.0
Middle	155.0	1.02	1.0
Highest	174.0	1.10	1.0

#### 6.6. RF EXPOSURE REQUIRMENTS @ 1.1310 & 2.1091

#### 6.6.1. Limits

• FCC 1.1310:- The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

#### LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (minutes)		
	(A) Limits for Occupational/Control Exposures					
30-300	30-300 61.4 0.163 1.0 6					
	(B) Limits for General Population/Uncontrolled Exposure					
30-300	27.5	0.073	0.2	30		

F = Frequency in MHz

#### 6.6.2. Method of Measurements

Refer to FCC @ 1.1310, 2.1091 and Public Notice DA 00-705 (March 30, 2000)

- In order to demonstrate compliance with MPE requirements (see Section 2.1091), the following information is typically needed:
- (1) Calculation that estimates the minimum separation distance (20 cm or more) between an antenna and persons required to satisfy power density limits defined for free space.
- (2) Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement
- (3) Any caution statements and/or warning labels that are necessary in order to comply with the exposure limits
- (4) Any other RF exposure related issues that may affect MPE compliance

#### **Calculation Method of RF Safety Distance**:

$$S = PG/4\Pi r^2 = EIRP/4\Pi r^2$$

Where: P: power input to the antenna in mW

EIRP: Equivalent (effective) isotropic radiated power.

S: power density mW/cm<sup>2</sup>

G: numeric gain of antenna relative to isotropic radiator

r: distance to centre of radiation in cm

FCC radio frequency exposure limits may be exceeded at distances closer than r cm from the antenna of this device

$$r = \sqrt{PG/4\Pi S}$$

FCC radio frequency exposure limits may not be exceeded at distances closer than r cm from the antenna of this device

• For portable transmitters (see Section 2.1093), or devices designed to operate next to a person's body, compliance is determined with respect to the SAR limit (define in the body tissues) for near-field exposure conditions. If the maximum average output power, operating condition configurations and exposure conditions are comparable to those of existing cellular and PCS phones., an SAR evaluation may be required in order to determine if such a device complies with SAR limit. When SAR evaluation data is not available, and the additional supporting information cannot assure compliance, the Commission may request that an SAR evaluation be performed, as provided for in Section 1.1307(d)

#### 6.6.3. Test Data

#### Antenna Gain Limit specified by Manufactuer: 3 dBi

Measured Maximum	Calculated	Laboratory's Recommended	Manufacturer's specified antenna
RF Conducted Power	EIRP	Minimum RF Safety Distance r	separation distance
(watts)	(watts)	(cm)	(cm)
9.91	19.95	40.0	70.0

Note 1: RF EXPOSURE DISTANCE LIMITS:  $r = (PG/4\Pi S)^{1/2} = (EIRP/4\Pi S)^{1/2}$  $S = 1.0 \text{ mW/cm}^2$ 

 $\begin{array}{l} r = (PG/4\Pi S)^{1/2} = (EIRP/4\Pi S)^{1/2} \\ = 40.0 \ cm \end{array}$ 

Evaluation of RF Ex	posure Compliance Requirements
RF Exposure Requirements	Compliance with FCC Rules
Minimum calculated separation distance between antenna and persons required: 40.0 cm	Manufacturer' instruction for separation distance between antenna and persons required: 70 cm
Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement	Please refer to Page 1 of Users Manual
Caution statements and/or warning labels that are necessary in order to comply with the exposure limits	Please refer to page 3-1 of the Users/ Manual and FCC RF Exposure folder
Any other RF exposure related issues that may affect MPE compliance	N/A

#### 6.7. FREQUENCY STABILITY @ FCC 2.1055 & 90.213

Sec. 90.213 Frequency stability.

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

## Minimum Frequency Stability [Parts per million (ppm)]

		Mobile	stations
Frequency range (MHz)	Fixed and base stations	Over 2 watts output power	2 watts or less output power
150-174	<sup>5,11</sup> 5	\6\ 5 <sup>4</sup>	<sup>,6</sup> 50

- (5) In the 150-174 MHz band, fixed and base stations with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Fixed and base stations with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.
- (6) In the 150-174 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth or designed to operate on a frequency specifically designated for itinerant use or designed for low-power operation of two watts or less, must have a frequency stability of 5.0ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 2.0 ppm.
- (b) For the purpose of determining the frequency stability limits, the power of a transmitter is considered to be the maximum rated outputpower as specified by the manufacturer.


#### 6.7.1. Method of Measurements

Refer to Exhibit 8, § 8.3 of this report for measurement details

#### 6.7.2. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
EMI Receiver/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Attenuator(s)	Bird			DC – 22 GHz
Temperature & Humidity Chamber	Tenney	T5	9723B	-40° to +60° C range

### **6.7.3.** Test Arrangement

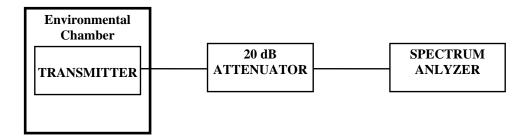

#### 6.7.4. Test Data

Product Name:	VHF P25 AIRBORNE TRANSCEIVER
Model No.:	TDFM-636
Center Frequency:	136.0 MHz
Full Power Level:	39.96 dBm
Frequency Tolerance Limit:	$\pm$ 5 ppm or $\pm$ 680.0 Hz
Max. Frequency Tolerance Measured:	- 419 Hz or -3.08 ppm
Input Voltage Rating:	28 V DC

	CENTER FREQUENCY & RF POWER OUTPUT VARIATION					
Ambient Temperature (°C)	Supply Voltage (Nominal)  28.0olts dc  Hz	Supply Voltage (85% of Nominal) 23.8 Volts dc Hz	Supply Voltage (115% of Nominal) 32.2 Volts dc Hz			
-30	- 419	N/A	N/A			
-20	+ 52	N/A	N/A			
-10	- 192	N/A	N/A			
0	+ 99	N/A	N/A			
+10	+ 172	N/A	N/A			
+20	+ 26	+ 95	+ 99			
+30	- 21	N/A	N/A			
+40	- 51	N/A	N/A			
+50	+ 279	N/A	N/A			

#### 6.8. AUDIO FREQUENCY RESPONSE @ FCC 2.1047(A) & 90.242(B)(8)

#### 6.8.1. Limits @ FCC 2.1047(a) and 90.242(b)(8)

Recommended audio filter attenuation characteristics are give below:

RF Band	Audio band	Minimum Attenuation Rel. to 1 kHz Attenuation
138 – 174 MHz	3 –20 kHz	$60 \log_{10}(f/3)$ dB where f is in kHz
	20 - 30  kHz	50dB


#### 6.8.2. Method of Measurements

The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT (Audio) EMI Receiver. Tests were repeated at different audio signal frequencies from 0 to 50 kHz.

#### 6.8.3. Test Equipment List

<b>Test Instruments</b>	Manufacturer	Model No.	Serial No.	Frequency Range
Modulation Analyzer	Hewlett Packard	8910B	3226A04606	150 kHz – 1300 MHz
Function Generator	Stanford Research Systems	DS345	34591	1μHz – 30.2 MHz
FFT Digital Spectrum	Advantest	R9211E	82020336	
Attenuator	Weinschel Crop.	46-20-34	BM1347	DC-18 GHz

#### 6.8.4. Test Arrangement

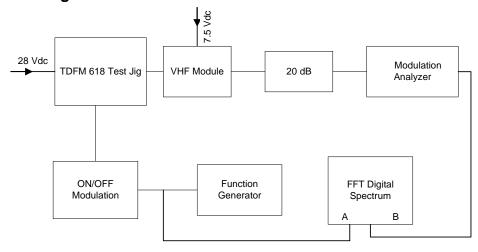

#### 6.8.5. Test Data

#### 6.8.5.1. Audio Frequency Response of All Modulation States - 12.5 kHz Channel Spacing

	AUDIO	AUDIO	ATTEN.	ATTEN.	FCC LIMIT	
FREQUENCY	IN	OUT	(OUT - IN)	wrt. 1 kHz		PASS/
(kHz)	(dBV)	(dBV)	(dB)	(dB)	(dB)	FAIL
0.10	-7.4	<-60.0	<-52.6	<-60.8		PASS
0.20	-7.4	<-60.0	<-52.6	<-60.8		PASS
0.40	-7.4	-21.0	-13.6	-21.8		PASS
0.60	-7.4	-10.1	-2.6	-10.8		PASS
0.80	-7.4	-3.5	3.9	-4.3		PASS
1.00	-7.4	0.8	8.2	0.0		PASS
1.20	-7.4	2.5	9.9	1.7		PASS
1.40	-7.4	2.5	9.9	1.7		PASS
1.50	-7.4	2.6	10.0	1.8		PASS
1.60	-7.4	3.3	10.7	2.5		PASS
1.80	-7.4	3.8	11.3	3.1		PASS
2.00	-7.4	4.0	11.4	3.2		PASS
2.20	-7.4	4.0	11.4	3.2		PASS
2.40	-7.4	4.0	11.4	3.2		PASS
2.50	-7.4	4.0	11.4	3.2		PASS
2.60	-7.4	4.1	11.5	3.3		PASS
2.80	-7.4	4.2	11.6	3.4		PASS
3.00	-7.4	4.1	11.6	3.4	0.0	PASS
3.40	-7.4	-11.1	-3.7	-11.9	-3.3	PASS
3.50	-7.4	-46.5	-39.1	-47.3	-4.0	PASS
4.00	-7.4	<-60.0	<-52.6	<-60.8	-7.5	PASS
4.50	-7.4	<-60.0	<-52.6	<-60.8	-10.6	PASS
5.00	-7.4	<-60.0	<-52.6	<-60.8	-13.3	PASS
6.00	-7.4	<-60.0	<-52.6	<-60.8	-18.1	PASS
7.00	-7.4	<-60.0	<-52.6	<-60.8	-22.1	PASS
8.00	-7.4	<-60.0	<-52.6	<-60.8	-25.6	PASS
9.00	-7.4	<-60.0	<-52.6	<-60.8	-28.6	PASS
10.00	-7.4	<-60.0	<-52.6	<-60.8	-31.4	PASS
15.00	-7.4	<-60.0	<-52.6	<-60.8	-41.9	PASS
15.00	-7.4	<-60.0	<-52.6	<-60.8	-41.9	PASS
20.00	-7.4	<-60.0	<-52.6	<-60.8	-49.4	PASS
22.00	-7.4	<-60.0	<-52.6	<-60.8	-50.0	PASS
28.00	-7.4	<-60.0	<-52.6	<-60.8	-50.0	PASS
30.00	-7.4	<-60.0	<-52.6	<-60.8	-50.0	PASS
40.00	-7.4	<-60.0	<-52.6	<-60.8	-50.0	PASS
50.00	-7.4	<-60.0	<-52.6	<-60.8	-50.0	PASS

File #: TIL-039FCC90

## AUDIO FREQUENCY REPSONSE @ FCC 2.987(a) & 90.242b(8) Technisonic VHF FM Transceiver (12.5 kHz Channel Spacing)



6.8.5.2. Audio Frequency Response of All Modulation States - 25 kHz Channel Spacing


	AUDIO	AUDIO	ATTEN.	ATTEN.	FCC LIMIT	
FREQUENCY	IN	OUT	(OUT - IN)	wrt. 1 kHz		PASS/
(kHz)	(dBV)	(dBV)	(dB)	(dB)	(dB)	FAIL
0.10	-7.3	<-60.0	<-52.7	<-66.8		PASS
0.20	-7.3	-58.2	-50.9	-65.0		PASS
0.40	-7.3	-14.8	-7.4	-21.5		PASS
0.60	-7.3	-4.1	3.2	-10.9		PASS
0.80	-7.3	2.3	9.6	-4.5		PASS
1.00	-7.3	6.7	14.1	0.0		PASS
1.20	-7.3	8.7	16.0	1.9		PASS
1.40	-7.3	8.6	15.9	1.8		PASS
1.50	-7.3	8.7	16.0	1.9		PASS
1.60	-7.3	9.5	16.8	2.7		PASS
1.80	-7.3	10.0	17.4	3.3		PASS
2.00	-7.3	10.1	17.4	3.3		PASS
2.20	-7.3	10.1	17.4	3.3		PASS
2.40	-7.3	10.1	17.4	3.3		PASS
2.50	-7.3	10.1	17.4	3.3		PASS
2.60	-7.3	10.1	17.4	3.3		PASS
2.80	-7.3	10.1	17.4	3.3		PASS
3.00	-7.3	10.2	17.6	3.5	0.0	PASS
3.40	-7.3	-5.1	2.2	-11.9	-3.3	PASS
3.50	-7.3	-42.1	-34.8	- 48.9	-4.0	PASS
4.00	-7.3	<-60.0	<-52.7	<-66.8	-7.5	PASS
4.50	-7.3	<-60.0	<-52.7	<-66.8	-10.6	PASS
5.00	-7.3	<-60.0	<-52.7	<-66.8	-13.3	PASS
6.00	-7.3	<-60.0	<-52.7	<-66.8	-18.1	PASS
7.00	-7.3	<-60.0	<-52.7	<-66.8	-22.1	PASS
8.00	-7.3	<-60.0	<-52.7	<-66.8	-25.6	PASS
9.00	-7.3	<-60.0	<-52.7	<-66.8	-28.6	PASS
10.00	-7.3	<-60.0	<-52.7	<-66.8	-31.4	PASS
15.00	-7.3	<-60.0	<-52.7	<-66.8	-41.9	PASS
15.00	-7.3	<-60.0	<-52.7	<-66.8	-41.9	PASS
20.00	-7.3	<-60.0	<-52.7	<-66.8	-49.4	PASS
22.00	-7.3	<-60.0	<-52.7	<-66.8	-50.0	PASS
28.00	-7.3	<-60.0	<-52.7	<-66.8	-50.0	PASS
30.00	-7.3	<-60.0	<-52.7	<-66.8	-50.0	PASS
40.00	-7.3	<-60.0	<-52.7	<-66.8	-50.0	PASS
50.00	-7.3	<-60.0	<-52.7	<-66.8	-50.0	PASS

File #: TIL-039FCC90

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

 $Tel.~\#:~905-829-1570, Fax.~\#:~905-829-8050, Email: \underline{vic@ultratech-labs.com}, Website: http://www.ultratech-labs.com$ 

## AUDIO FREQUENCY REPSONSE @ FCC 2.987(a) & 90.242b(8) Technisonic VHF FM Transceiver (25 kHz Channel Spacing)

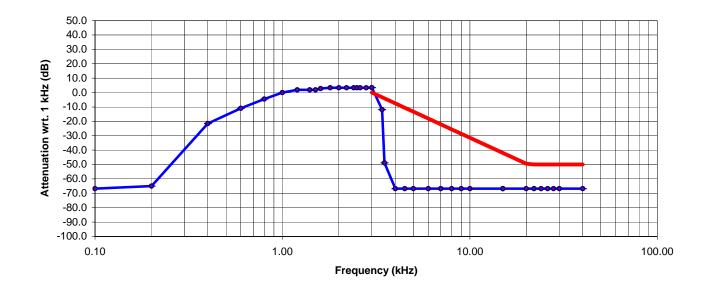

#### 6.9. MODULATION LIMITING @ FCC 2.1047(B) & 90.210

#### 6.9.1. Limits @ FCC 2.1047(b) and 90.210

Recommended frequency deviation characteristics are given below:

- 2.5 kHz for 12.5 kHz Channel Spacing
- 5 kHz for 25 kHz Channel Spacing System

#### 6.9.2. Method of Measurements


**For Audio Transmitter:**- The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

**For Data Transmitter with Maximum Frequency Deviation set by Factory**:- The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

#### 6.9.3. Test Equipment List

<b>Test Instruments</b>	Manufacturer	Model No.	Serial No.	Frequency Range
Modulation Analyzer	Hewlett Packard	8910B	3226A04606	150 Khz – 1300 MHZ
Function Generator	Stanford Research Systems	DS345	34591	1μHz – 30.2 MHz
Attenuator	Weinchel Corp.	46-20-34	BM1347	DC – 18 GHz

#### 6.9.4. Test Arrangement

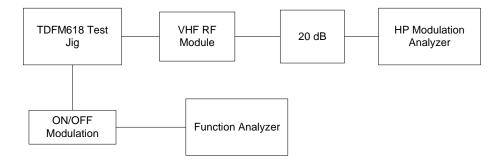

#### 6.9.5. Test Data

## 6.9.5.1. Data Modulation Limiting: FM modulation with random data and Modulation Limiter set at a Maximum Frequency Deviation (Factory Setting).

#### 6.9.5.1.1. 12.5 kHz Channel Spacing

Data Baud Rate	Peak Deviation (kHz)	Recommended Maximum Limit (kHz)
9600	3.10	2.5

#### 6.9.5.1.2. 25 kHz Channel Spacing

Data Baud Rate	Peak Deviation (kHz)	Recommended Maximum Limit (kHz)
N/A	N/A	5 kHz

\* FM Data modulation is not available for 25 kHz channel spacing operation

#### 6.9.5.2. Voice Modulation Limiting:

#### 6.9.5.2.1. 12.5 kHz Channel Spacing

MODULATING			REQUENCY DEVIATI	ON (kHz)		MAXIMUM LIMIT
(mVrms)	at the following module  0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	(kHz)
5	0.05	0.13	0.26	0.75	0.04	2.5
10	0.05	0.21	0.47	1.45	0.04	2.5
15	0.05	0.33	0.67	2.16	0.06	2.5
20	0.05	0.38	0.89	2.33	0.06	2.5
25	0.05	0.50	1.10	2.33	0.06	2.5
30	0.05	0.54	1.32	2.33	0.06	2.5
35	0.05	0.61	1.52	2.33	0.06	2.5
40	0.05	0.70	1.74	2.33	0.06	2.5
45	0.05	0.78	1.96	2.33	0.06	2.5
50	0.05	0.87	2.15	2.33	0.06	2.5
60	0.05	1.01	2.23	2.33	0.06	2.5
70	0.05	1.16	2.26	2.34	0.07	2.5
80	0.05	1.33	2.28	2.33	0.06	2.5
90	0.05	1.49	2.27	2.33	0.06	2.5
100	0.05	1.64	2.26	2.34	0.07	2.5
120	0.06	2.01	2.27	2.34	0.07	2.5
140	0.06	2.26	2.27	2.33	0.07	2.5
160	0.07	2.25	2.27	2.34	0.07	2.5
180	0.06	2.27	2.26	2.33	0.07	2.5
200	0.06	2.27	2.27	2.34	0.07	2.5

Voice Signal Input Level = STD MOD Level + 16 dB = 46.76 dBmVrms + 16 = 62.76 dBmVrms or 217.7 mVrms

MODULATING FREQUENCY (KHz)	PEAK FREQUENCY DEVIATION (KHz)	MAXIMUM LIMIT (KHz)
0.1	0.05	2.5
0.2	0.07	2.5
0.4	2.32	2.5
0.6	2.27	2.5
0.8	2.23	2.5
1.0	2.27	2.5
1.2	2.27	2.5
1.4	2.25	2.5
1.6	2.26	2.5
1.8	2.28	2.5
2.0	2.28	2.5
2.5	2.30	2.5
3.0	2.34	2.5
3.5	0.32	2.5
4.0	0.07	2.5
4.5	0.04	2.5
5.0	0.08	2.5
6.0	0.05	2.5
7.0	0.06	2.5
8.0	0.04	2.5
9.0	0.05	2.5
10.0	0.06	2.5

#### 6.9.5.2.2. 25 kHz Channel Spacing

MODULATING SIGNAL LEVEL	at the following modul		REQUENCY DEVIATION	ON (kHz)		MAXIMUM LIMIT
(mVrms)	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	(kHz)
5	0.07	0.23	0.51	1.49	0.06	5.0
10	0.08	0.42	0.91	2.91	0.07	5.0
15	0.07	0.56	1.32	4.34	0.06	5.0
20	0.08	0.72	1.75	4.64	0.07	5.0
25	0.08	0.89	2.22	4.63	0.07	5.0
30	0.08	1.04	2.62	4.64	0.07	5.0
35	0.08	1.22	3.09	4.63	0.07	5.0
40	0.08	1.38	3.56	4.63	0.07	5.0
45	0.07	1.54	3.97	4.63	0.08	5.0
50	0.08	1.71	4.45	4.64	0.09	5.0
60	0.07	2.02	4.53	4.63	0.09	5.0
70	0.08	2.32	4.51	4.64	0.08	5.0
80	0.08	2.65	4.53	4.63	0.09	5.0
90	0.08	2.98	4.53	4.65	0.08	5.0
100	0.07	3.30	4.54	4.64	0.08	5.0
120	0.08	3.96	4.53	4.64	0.08	5.0
140	0.08	4.44	4.54	4.63	0.08	5.0
160	0.09	4.46	4.53	4.65	0.08	5.0
180	0.08	4.44	4.54	4.64	0.09	5.0
200	0.08	4.44	4.54	4.64	0.09	5.0

Voice Signal Input Level = STD MOD Level + 16 dB = 30.63 dBmVrms + 16 = 46.63 dBmVrms or 214.53 mVrms

MODULATING FREQUENCY (KHz)	PEAK FREQUENCY DEVIATION (KHz)	MAXIMUM LIMIT (KHz)
0.1	0.08	5.0
0.2	0.11	5.0
0.4	4.63	5.0
0.6	4.50	5.0
0.8	4.45	5.0
1.0	4.52	5.0
1.2	4.53	5.0
1.4	4.46	5.0
1.6	4.50	5.0
1.8	4.51	5.0
2.0	4.57	5.0
2.5	4.57	5.0
3.0	4.62	5.0
3.5	0.55	5.0
4.0	0.17	5.0
4.5	0.07	5.0
5.0	0.16	5.0
6.0	0.10	5.0
7.0	0.10	5.0
8.0	0.10	5.0
9.0	0.10	5.0
10.0	0.11	5.0

#### 6.10. EMISSION MASK @ FCC 2.1049, 90.209 & 90.210

#### 6.10.1. Limits @ FCC 90.209 & 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

Frequency Range (MHz)	Maximum Authorized BW (KHz)	Channel Spacing (KHz)	Recommended Frequency Deviation (KHz)	FCC Applicable Mask
136-174	20.0	25.0	5.0	<ul> <li>Mask B – Voice</li> </ul>
136-174	11.25	12.5	2.5	Mask D – Voice & Data


#### 6.10.2. Method of Measurements

Refer to Exhibit 8, § 8.4 of this report for measurement details

#### 6.10.3. Test Equipment List

<b>Test Instruments</b>	Manufacturer	Model No.	Serial No.	Frequency Range
EMI Receiver/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Attenuator(s)	Bird		•••	DC – 22 GHz
Audio Oscillator	Hewlett Packard	HP 204C	0989A08798	DC to 1.2 MHz

#### 6.10.4. Test Arrangement




#### 6.10.5.1. 99% Occupied Bandwidth


Frequency (MHz)	Channel Spacing (kHz)	Modulation Type	Measured 99% OBW (kHz)	Recommended 99% OBW (kHz)
136.0	12.5	Digital Modulation	9.28	11.125
155.0	12.5	Digital Modulation	9.41	11.125
174.0	12.5	Digital Modulation	9.51	11.125
136.0	12.5	FM Modulation with 2.5 kHz Sine Wave Signal	9.79	11.125
155.0	12.5	FM Modulation with 2.5 kHz Sine Wave Signal	9.99	11.125
174.0	12.5	FM Modulation with 2.5 kHz Sine Wave Signal	9.90	11.125
136.0	25.0	FM Modulation with 2.5 kHz Sine Wave Signal	14.71	20.0
155.0	25.0	FM Modulation with 2.5 kHz Sine Wave Signal	15.00	20.0
174.0	25.0	FM Modulation with 2.5 kHz Sine Wave Signal	14.83	20.0

**Conform**. Please refer to Plots # 1 through # 9 for Details of measurements


Plot # 1 99% Occupied Bandwidth, RF input level = 39.81 dBm Freq: 136.0 MHz, 12.5 kHz Channel Spacing, Digital Modulation

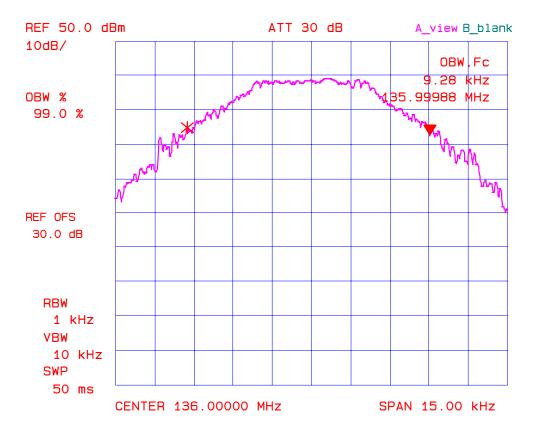


Plot # 2 99% Occupied Bandwidth, RF input level = 39.96 dBm Freq: 155.0 MHz, 12.5 kHz Channel Spacing, Digital Modulation

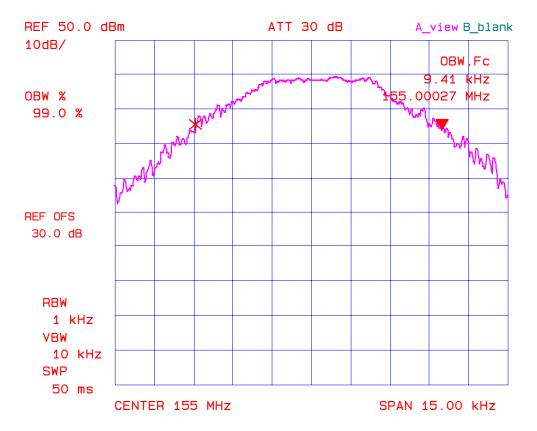


Plot # 3 99% Occupied Bandwidth, RF input level = 39.95 dBm Freq: 174.0 MHz, 12.5 kHz Channel Spacing, Digital Modulation

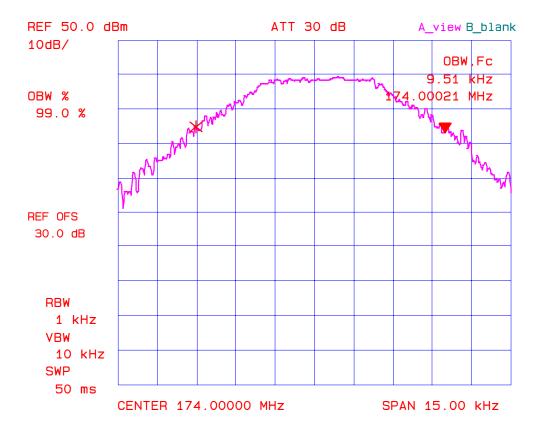


Plot # 4 99% Occupied Bandwidth, RF input level = 39.81 dBm Freq: 136.0 MHz, 12.5 kHz Channel Spacing, FM Modulation, 2.5 kHz Sine wave signal

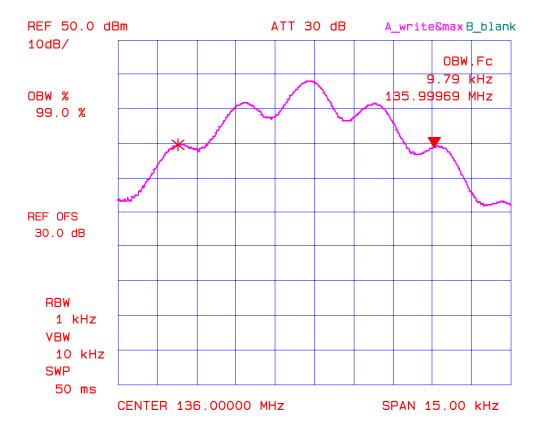


Plot # 5 99% Occupied Bandwidth, RF input level = 39.96 dBm Freq: 155.0 MHz, 12.5 kHz Channel Spacing, FM Modulation, 2.5 kHz Sine wave signal

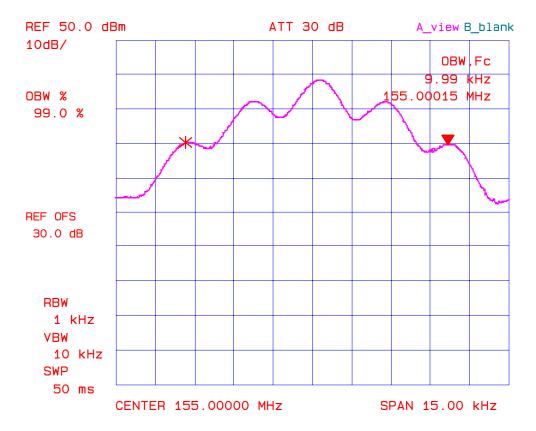


Plot # 6 99% Occupied Bandwidth, RF input level = 39.95 dBm Freq: 174.0 MHz, 12.5 kHz Channel Spacing, FM Modulation, 2.5 kHz Sine wave signal

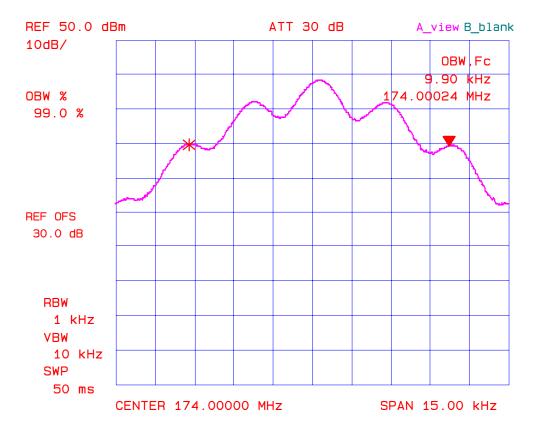


Plot # 7 99% Occupied Bandwidth, RF input level = 39.81 dBm Freq: 136.0 MHz, 25 kHz Channel Spacing, FM Modulation, 2.5 kHz Sine wave signal

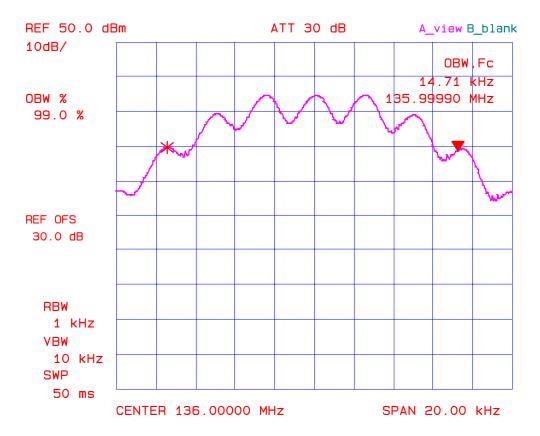

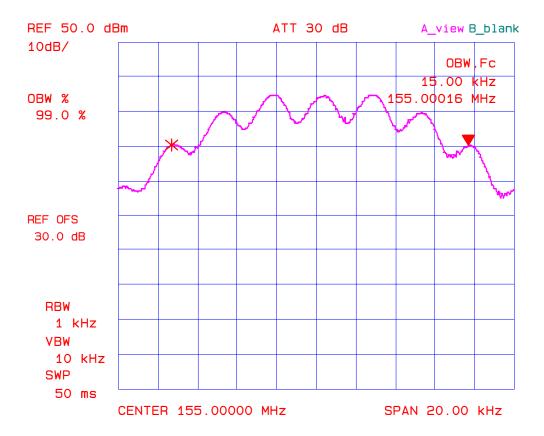

Plot # 9 99% Occupied Bandwidth, RF input level = 39.95 dBm Freq: 174.0 MHz, 25 kHz Channel Spacing, FM Modulation with 2.5 kHz Sine wave signal

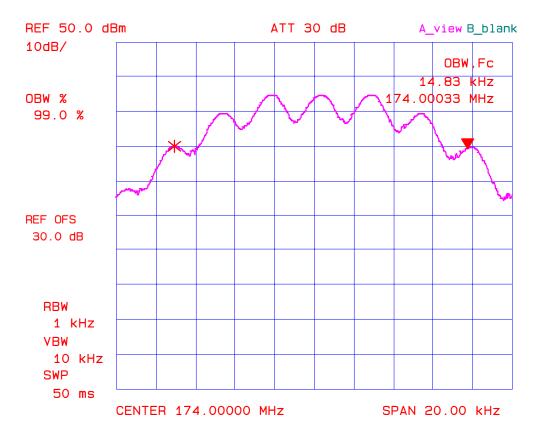


#### 6.10.5.2. Emission Masks


**Conform**. See the following test data plots (10 through 27) for details.

- Please refer to Plots# 10 to 12 for details of Emission Mask D for FM Voice Modulation Measurements in High Power mode for 12.5 kHz channel spacing operation.
- Please refer to Plots# 13 to 15 for details of Emission Mask D for Digital Data Modulation Measurements in High Power mode for 12.5 kHz channel spacing operation.
- Please refer to Plots# 16 to 18 for details of Emission Mask D for FM Voice Modulation Measurements in Low Power mode for 12.5 kHz channel spacing operation.
- Please refer to Plots# 19 to 21 for details of Emission Mask D for Digital Data Modulation Measurements in Low Power mode for 12.5 kHz channel spacing operation.
- Please refer to Plots# 22 to 24 for details of Emission Mask B for FM Voice Modulation Measurements in High Power mode for 25 kHz channel spacing operation.
- Please refer to Plots# 25 to 27 for details of Emission Mask B for FM Voice Modulation Measurements in Low Power mode for 25 kHz channel spacing operation.


Plot #10 Emission Mask D, High Power, Freq. 136.0 MHz FM Modulation with 2.5 kHz Sine wave signal, 12.5 kHz Channel Spacing

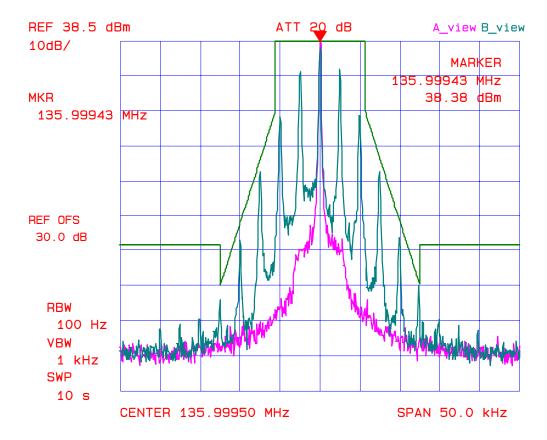


Plot # 11 Emission Mask D, High Power, Freq. 155.0 MHz FM Modulation with 2.5 kHz Sine wave signal, 12.5 kHz Channel Spacing

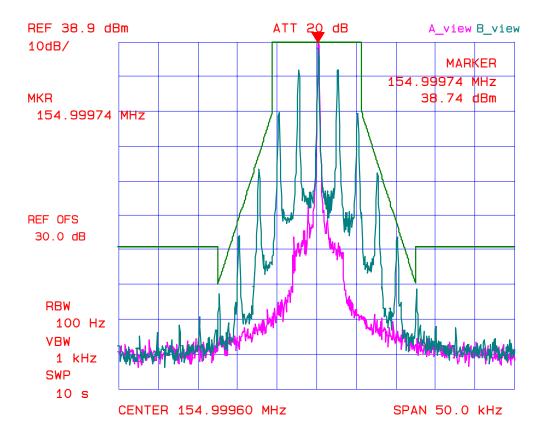


Plot # 12 Emission Mask D, High Power, Freq. 174.0 MHz FM Modulation with 2.5 kHz Sine wave signal, 12.5 kHz Channel Spacing

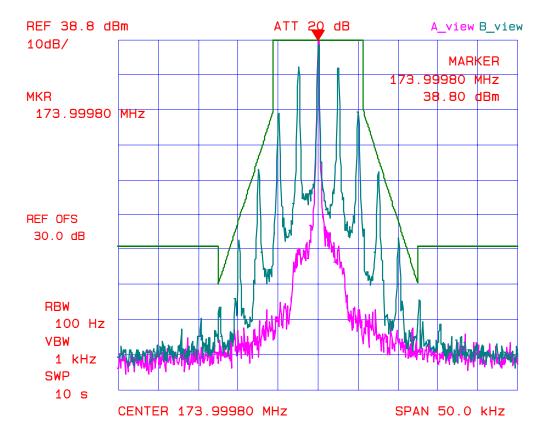


Plot # 13 Emission Mask D, High Power, Freq. 136.0 MHz Digital Data Modulation, 12.5 kHz Channel Spacing

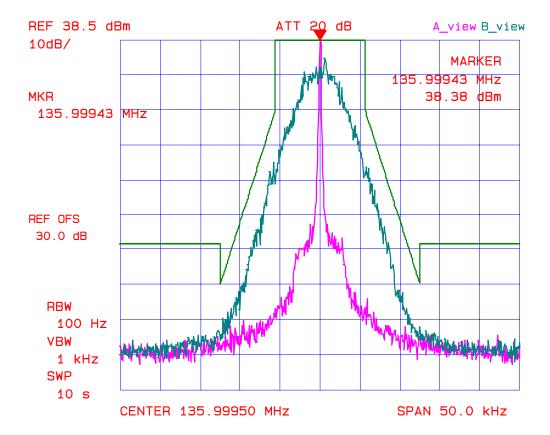


Plot # 14 Emission Mask D, High Power, Freq. 155.0 MHz
Digital Data Modulation, 12.5 kHz Channel Spacing

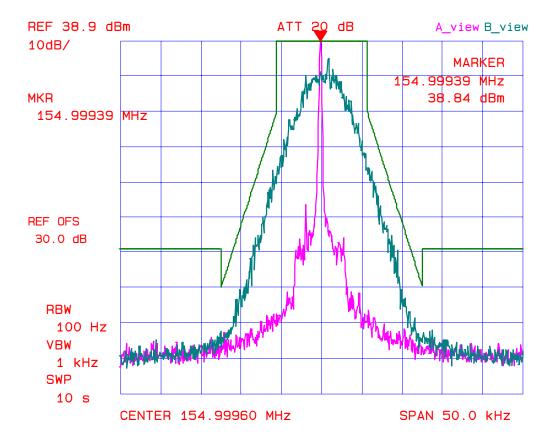


Plot # 15 Emission Mask D, High Power, Freq. 174.0 MHz
Digital Data Modulation, 12.5 kHz Channel Spacing

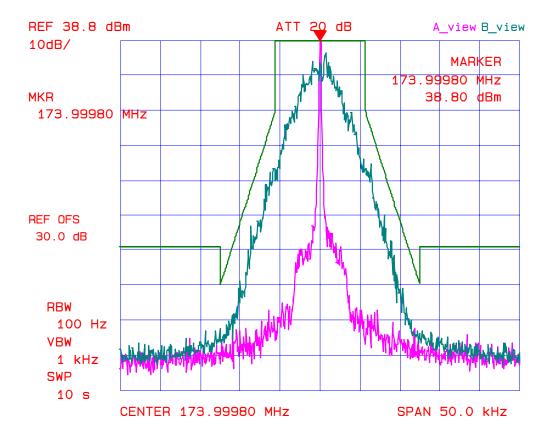


Plot # 16 Emission Mask D, Low Power, Freq. 136.0 MHz FM Modulation with 2.5 kHz Sine wave signal, 12.5 kHz Channel Spacing

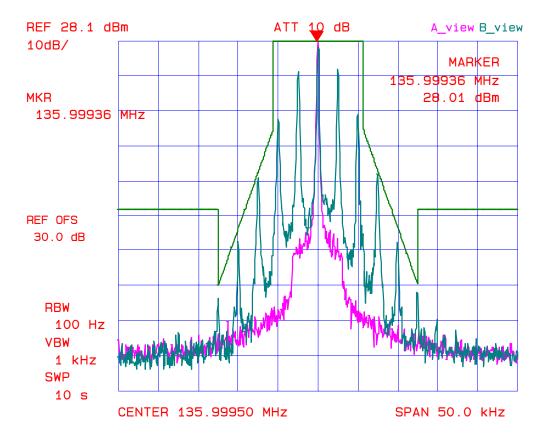


Plot # 17 Emission Mask D, Low Power, Freq. 155.0 MHz FM Modulation with 2.5 kHz Sine wave signal, 12.5 kHz Channel Spacing

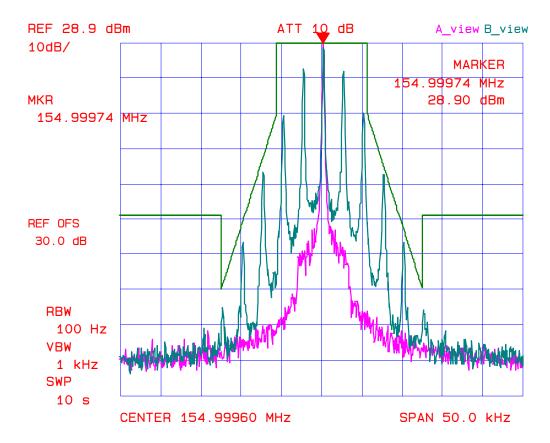


Plot # 18 Emission Mask D, Low Power, Freq. 174.0 MHz FM Modulation with 2.5 kHz Sine wave signal, 12.5 kHz Channel Spacing

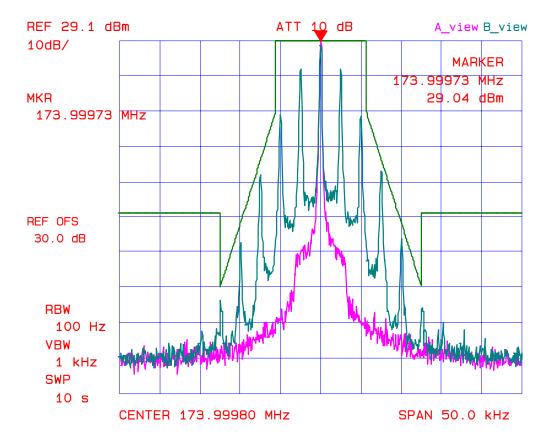


Plot # 19 Emission Mask D, Low Power, Freq. 136.0 MHz
Digital Data Modulation, 12.5 kHz Channel Spacing

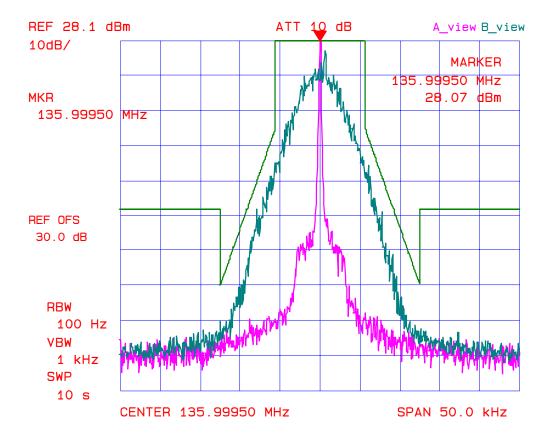


Plot # 20 Emission Mask D, Low Power, Freq. 155.0 MHz Digital Data Modulation, 12.5 kHz Channel Spacing

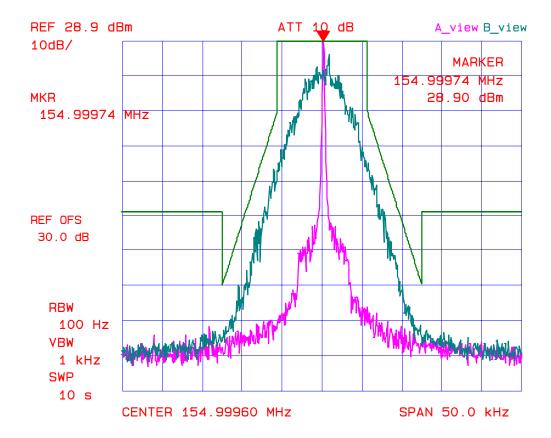


Plot # 21 Emission Mask D, Low Power, Freq. 174.0 MHz
Digital Data Modulation, 12.5 kHz Channel Spacing

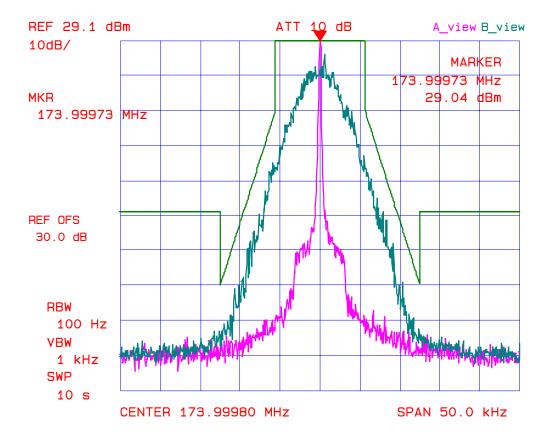


Plot # 22 Emission Mask B, High Power, Freq. 136.0 MHz FM Modulation with 2.5 kHz Sine wave signal, 25 kHz Channel Spacing

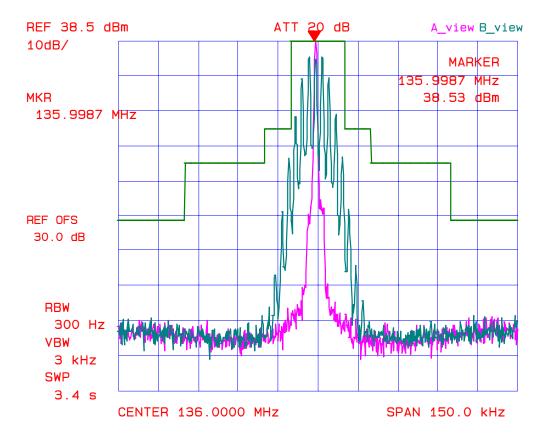


Plot # 23 Emission Mask B, High Power, Freq. 155.0 MHz FM Modulation with 2.5 kHz Sine wave signal, 25 kHz Channel Spacing

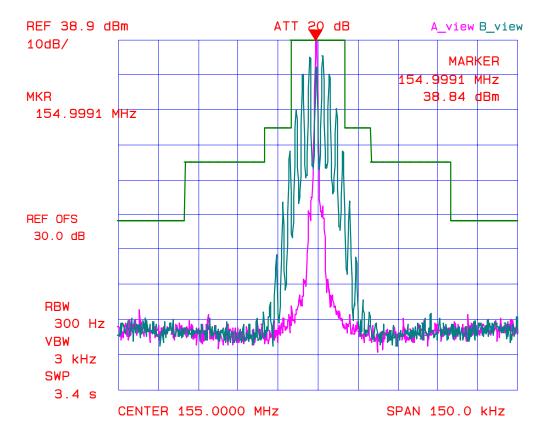


Plot # 24 Emission Mask B, High Power, Freq. 174.0 MHz FM Modulation with 2.5 kHz Sine wave signal, 25 kHz Channel Spacing

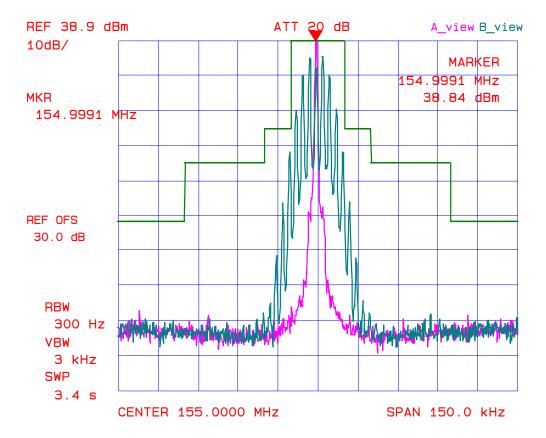


Plot # 25 Emission Mask B, Low Power, Freq. 136.0 MHz FM Modulation with 2.5 kHz Sine wave signal, 25 kHz Channel Spacing

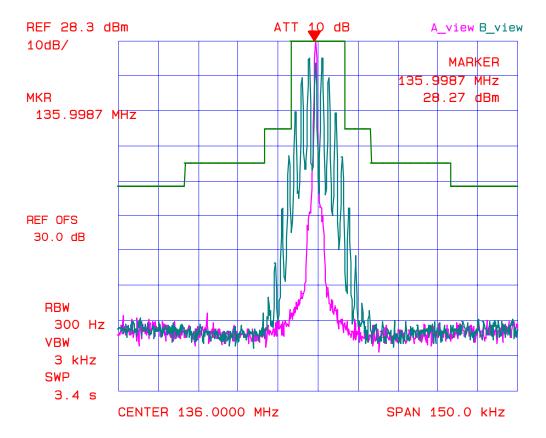

Plot # 26 Emission Mask B, Low Power, Freq. 155.0 MHz FM Modulation with 2.5 kHz Sine wave signal, 25 kHz Channel Spacing

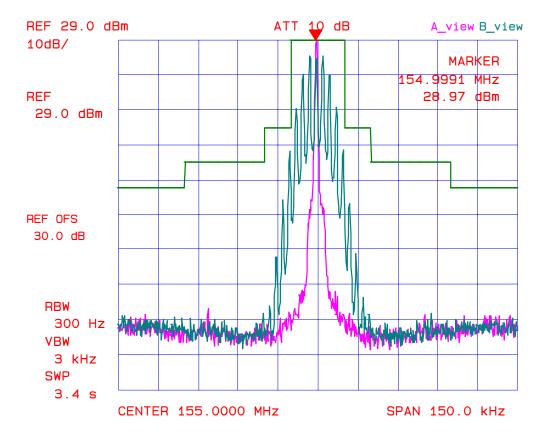

Plot # 27 Emission Mask B, Low Power, Freq. 174.0 MHz FM Modulation with 2.5 kHz Sine wave signal, 25 kHz Channel Spacing

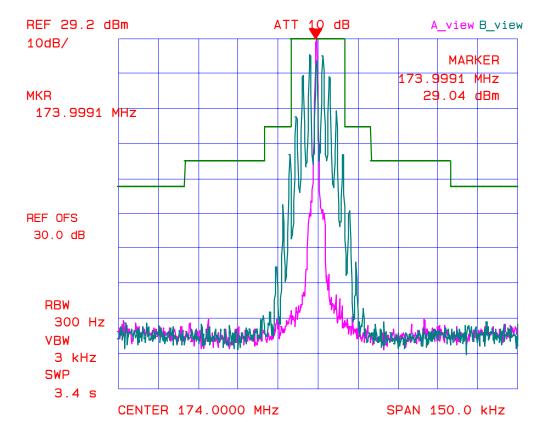

# 6.11. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS @ FCC 90.210

#### 6.11.1. Limits @ 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Rules Frequency Range	
90.210(b) – Voice	10 MHz to Lowest frequency of the radio to 10 <sup>th</sup> harmonic of the highest frequency of the radio	43+10*log(P) or -13 dBm
90.210(d) – Voice & data	10 MHz to Lowest frequency of the radio to 10 <sup>th</sup> harmonic of the highest frequency of the radio	50+10*log(P) or -20 dBm or 70 dBc whichever is less


#### 6.11.2. Method of Measurements

Refer to Exhibit 8 § 8.5 of this report for measurement details

# 6.11.3. Test Equipment List

<b>Test Instruments</b>	Manufacturer	Model No.	Serial No.	Frequency Range
EMI Receiver/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Attenuator(s)	Bird			DC – 22 GHz
Audio Oscillator	Hewlett Packard	HP 204C	0989A08798	DC to 1.2 MHz
Highpass Filter, Microphase	Microphase	CR220HID	IITI11000AC	Cut-off Frequency at 600 MHz, 1.3 GHz or 4 GHz

### 6.11.4. Test Arrangement

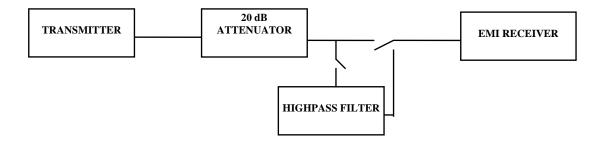

#### 6.11.5. Test Data

#### Remarks:

- The transmitter conducted emissions were scanned from 10 MHz to 2 GHz at 12.5 kHz channel spacing / FM voice modulation, 12.5 kHz channel spacing / FM digital modulation and 25 kHz channel spacing / FM voice modulation and the results were found the same. The following tables show test data measured with the transmitter set at 12.5 kHz channel spacing / FM voice modulation as representative.
- The most stringent limit = 50 + 10\*log(P in watts) were applied for both 12.5 kHz and 25 kHz channel spacing operation for worst case of measurements.

#### 6.11.5.1. High Power Setting at Lowest Frequency (136.0 MHz)

Fundamental Frequ	iency: 1	136.0 MHz				
RF Output Power:		39.81 dBm (Conducted)				
Modulation:	F	FM modulation with 2.5 kHz Sine Wave Signal				
FREQUENCY	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT	MARGIN	PASS/	
(MHz)	(dBm) (dBc)		(dBc)	(dB)	FAIL	
265.0	-34.8	-74.6	-59.8	-14.8	PASS	
399.0	-35.1	-74.9	-59.8	-15.1	PASS	
536.0	-39.1	-78.9	-59.8	-19.1	PASS	

The emissions were scanned from 10 MHz to 2 GHz and all emissions within 20 dB below the limits were recorded. Please refer to plots # 28 & 29 for details of measurement.

#### 6.11.5.2. High Power Setting at Middle Frequency (155.0 MHz)

Fundamental Frequ	iency: 155	0 MHz			
RF Output Power:	39.9	39.96 dBm (Conducted)			
Modulation:	FM	FM modulation with 2.5 kHz Sine Wave Signal			
FREQUENCY	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT	MARGIN	PASS/
(MHz)	(dBm) (dBc)		(dBc)	(dB)	FAIL
306.0	-33.7	-73.7	-60.0	-13.7	PASS

The emissions were scanned from 10 MHz to 2 GHz and all emissions within 20 dB below the limits were recorded. Please refer to plots # 30 & 31 for details of measurement.

## 6.11.5.3. High Power Setting at Highest Frequency (174.0 MHz)

Fundamental Frequ	iency:	174.0 MHz					
RF Output Power:		39.95 dBm (Conducted)					
Modulation:		FM modulation with 2.5 kHz Sine Wave Signal					
FREQUENCY	TRANSMITTER CONDUCTED		LIMIT	MARGIN	PASS/		
(MHz)	ANTENNA EMISSIONS (dBm) (dBc)		(dBc)	(dB)	FAIL		
341.0	-24.9	-64.9	-60.0	-4.9	PASS		
513.0	-38.5	-78.5	-60.0	-18.5	PASS		
688.0	-36.6	-76.6	-60.0	-16.6	PASS		

The emissions were scanned from 10 MHz to 2 GHz and all emissions within 20 dB below the limits were recorded. Please refer to plots # 32 & 33 for details of measurement.

## 6.11.5.4. Low Power Setting at Lowest Frequency (136.0 MHz)

Fundamental Frequ	l Frequency: 136.0 MHz				
RF Output Power:	29	9.39 dBm (Conducted)	Conducted)		
Modulation:	FI	FM modulation with 2.5 kHz Sine Wave Signal			
FREQUENCY	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT	MARGIN	PASS/
(MHz)	(dBm) (dBc)		(dBc)	(dB)	FAIL
**	** **		-49.4	**	

The emissions were scanned from 10 MHz to 2 GHz and no emissions within 20 dB below the limits were found. Please refer to plots # 34 & 35 for details of measurement.

#### 6.11.5.5. Low Power Setting at Middle Frequency (155.0 MHz)

Fundamental Frequ	iency: 155.0	MHz			
RF Output Power:	30.09	30.09 dBm (Conducted)			
Modulation:	FM n	FM modulation with 2.5 kHz Sine Wave Signal			
FREQUENCY	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT	MARGIN	PASS/
(MHz)	(dBm) (dBc)		(dBc)	(dB)	FAIL
**	** **		-50.1	**	


The emissions were scanned from 10 MHz to 2 GHz and no emissions within 20 dB below the limits were found. Please refer to plots # 36 & 37 for details of measurement.

## 6.11.5.6. Low Power Setting at Highest Frequency (174.0 MHz)


Fundamental Frequ	iency: 1	174.0 MHz				
RF Output Power:	3	30.40 dBm (Conducted)				
Modulation:	F	FM modulation with 2.5 kHz Sine Wave Signal				
FREQUENCY	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT	MARGIN	PASS/	
(MHz)	(dBm) (dBc)		(dBc)	(dB)	FAIL	
**	** **		-50.4	**		

The emissions were scanned from 10 MHz to 2 GHz and no emissions within 20 dB below the limits were found. Please refer to plots # 38 & 39 for details of measurement.


Plot # 28 Transmitter Antenna Power Conducted Emissions. Freq. 136.0 MHz, High Power

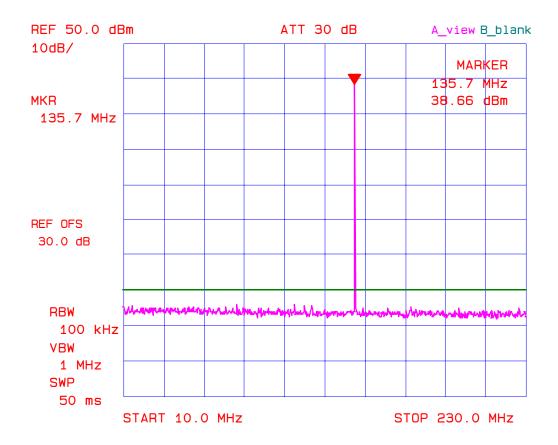


Plot # 29 Transmitter Antenna Power Conducted Emissions. Freq. 136.0 MHz, High Power

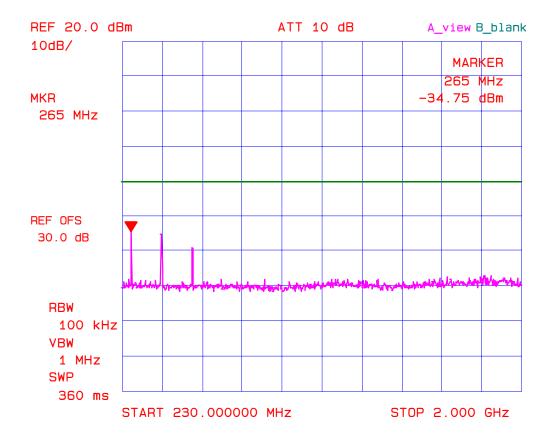


Plot # 30 Transmitter Antenna Power Conducted Emissions. Freq. 155.00 MHz, High Power

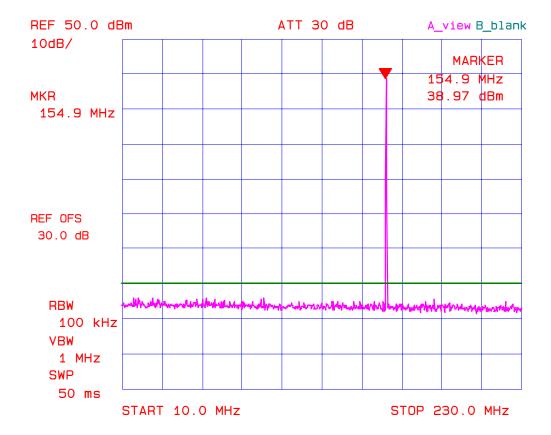


Plot # 31 Transmitter Antenna Power Conducted Emissions. Freq. 155.00 MHz, High Power

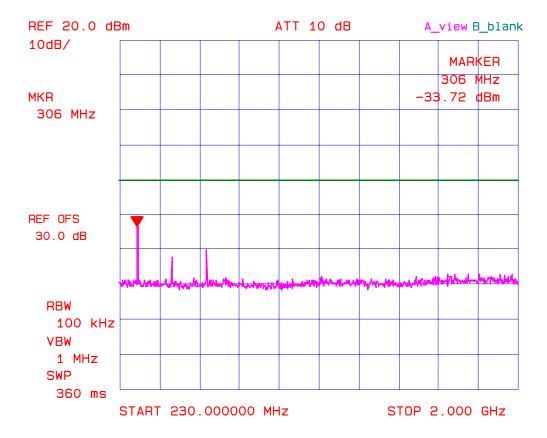


Plot # 32 Transmitter Antenna Power Conducted Emissions. Freq. 174.00 MHz, High Power

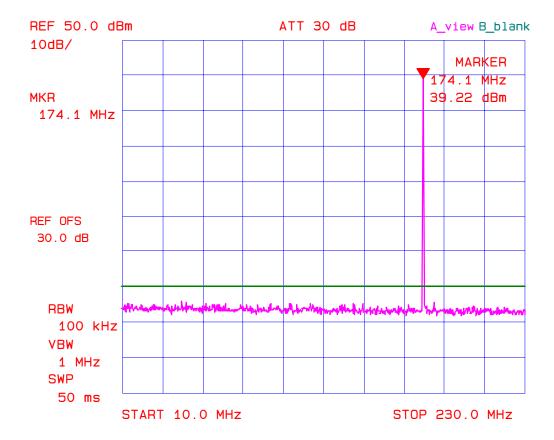


Plot # 33 Transmitter Antenna Power Conducted Emissions. Freq. 174.00 MHz, High Power

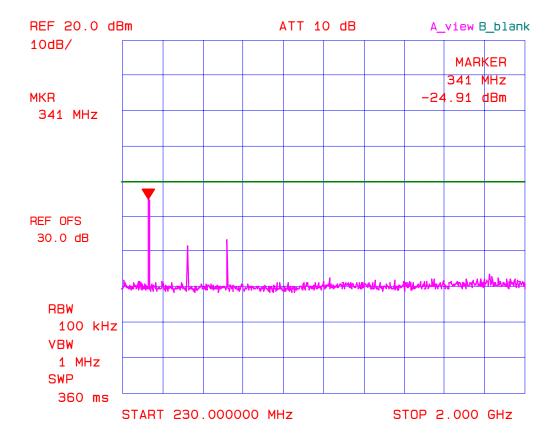


Plot # 34 Transmitter Antenna Power Conducted Emissions. Freq. 136.00 MHz, Low Power

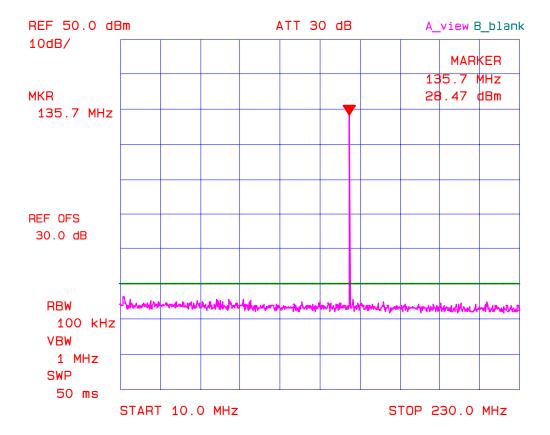


Plot # 35 Transmitter Antenna Power Conducted Emissions. Freq. 136.00MHz, Low Power

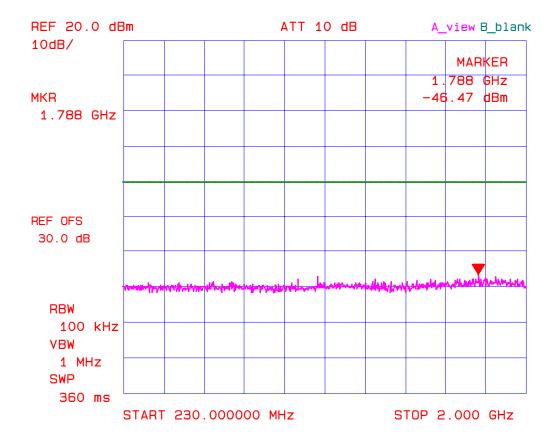


Plot # 36 Transmitter Antenna Power Conducted Emissions. Freq. 155.00 MHz, Low Power

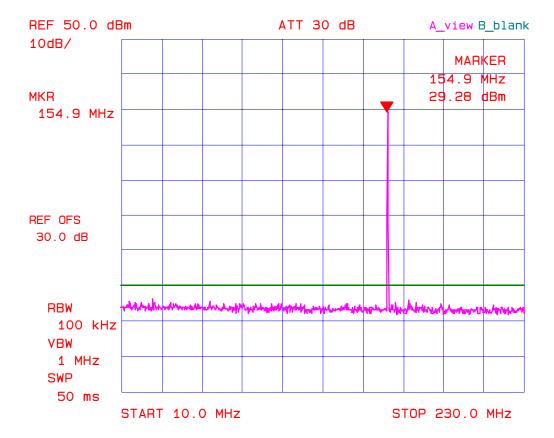


Plot # 37 Transmitter Antenna Power Conducted Emissions. Freq. 155.00 MHz, Low Power

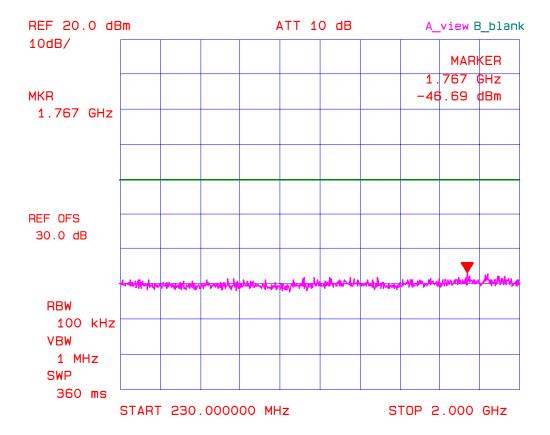

Plot # 38 Transmitter Antenna Power Conducted Emissions. Freq. 174.00 MHz, Low Power

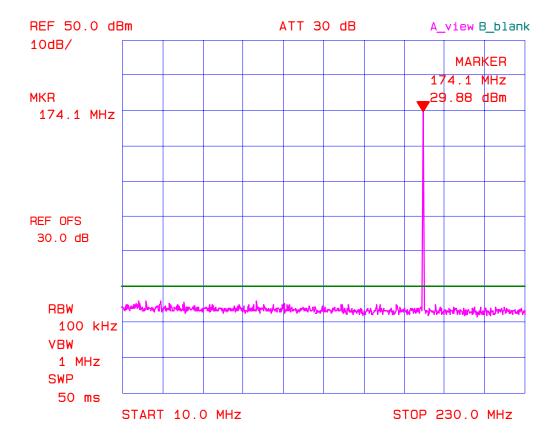

Plot # 39 Transmitter Antenna Power Conducted Emissions. Freq. 174.00 MHz, Low Power

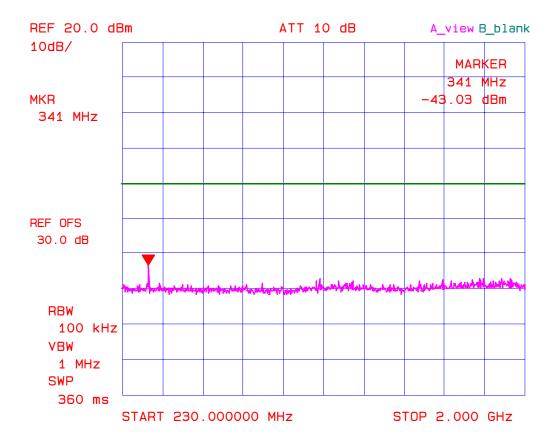

# 6.12. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.210

### 6.12.1. Limits @ FCC 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

Frequency Range (MHz)	Maximum Authorized BW (KHz)	Channel Spacing (KHz)	Recommended Frequency Deviation (KHz)	FCC Applicable Mask
150-174	20.0	25.0	5.0	<ul> <li>90.210(b): Mask B – Voice</li> <li>90.210(c): Mask C – Data</li> </ul>
150-174	11.25	12.5	2.5	• 90.210(d): Mask D – Voice & Data
150-174	6.0	6.25	1.25	• 90.210(b): Mask E – Voice & Data

### 6.12.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in Exhibit 8, § 8.2 of this report and its value in dBc is calculated as follows:

- (1) If the transmitter's antenna is an integral part of the EUT, the ERP is measured using substitution method.
- (2) If the transmitter's antenna is non-integral and diverse, the lowest ERP of the carrier with 0 dBi antenna gain is used for calculation of the spurious/harmonic emissions in dBc:

  Lowest ERP of the carrier = EIRP 2.15 dB = Pc + G 2.15 dB = xxx dBm (conducted) + 0 dBi 2.15 dB
- (3) Spurious /harmonic emissions levels expressed in dBc (dB below carrier) are as follows:

ERP of spurious/harmonic (dBc) = ERP of carrier (dBm) – ERP of spurious/harmonic emission (dBm)

## 6.12.3. Test Equipment List

<b>Test Instruments</b>	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/	Hewlett Packard	HP 8546A		9 kHz to 5.6 GHz with
EMI Receiver				built-in 30 dB Gain Pre-
				selector, QP, Average &
				Peak Detectors.
RF Amplifier	Com-Power	PA-102		1 MHz to 1 GHz, 30 dB
				gain nomimal
Microwave Amplifier	Hewlett Packard	HP 83017A	1 GHz to 26.5 GHz, 30 d	
				nominal
Biconilog Antenna	EMCO	3142	10005	30 MHz to 2 GHz
Dipole Antenna	EMCO	3121C	8907-434	30 GHz – 1 GHz
Dipole Antenna	EMCO	3121C	8907-440	30 GHz – 1 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna	EMCO	3155	9911-5955	1 GHz – 18 GHz
RF Signal Generator	Hewlett Packard	HP 83752B	3610A00457	0.01 – 20 GHz

## 6.12.4. Test Setup

Please refer to Photo 1 to 2 in Annex 1 for detailed of test setup.

### 6.12.5. Test Data

#### Remarks:

- The transmitter conducted emissions were scanned from 10 MHz to 2 GHz at 12.5 kHz channel spacing / FM voice modulation, 12.5 kHz channel spacing / FM digital modulation and 25 kHz channel spacing / FM voice modulation and the results were found the same. The following tables show test data measured with the transmitter set at 12.5 kHz channel spacing / FM voice modulation as representative.
- The most stringent limit = 50 + 10\*log(P in watts) were applied for both 12.5 kHz and 25 kHz channel spacing operation with high power setting for worst case of measurements.

## 6.12.5.1. Lowest Frequency (136.00 MHz)

The emissions were scanned from 30 MHz to 2.0 GHz at 3 meters and no significant RF emissions were found with the EMI receiver's noise floor about 30 dB below the Limits.

## 6.12.5.2. Middle Frequency (155.00 MHz)

The emissions were scanned from 30 MHz to 2.0 GHz at 3 meters and no significant RF emissions were found with the EMI receiver's noise floor about 30 dB below the Limits.

### 6.12.5.3. Highest Frequency (174.00 MHz)

The emissions were scanned from 30 MHz to 2.0 GHz at 3 meters and no significant RF emissions were found with the EMI receiver's noise floor about 30 dB below the Limits.

June 3, 2004

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.13. TRANSIENT FREQUENCY BEHAVIOR @ 90.214

### 6.13.1. Limits

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:

Time intervals 1, 2	Maximum frequency	All equipment		
	difference <sup>3</sup>	136 to 174 MHz		
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels				
t <sub>1</sub> <sup>4</sup> t <sub>2</sub> t <sub>3</sub> <sup>4</sup>	± 25.0 kHz ± 12.5 kHz ± 25.0 kHz	5.0 ms 20.0 ms 5.0 ms		
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels				
t <sub>1</sub> <sup>4</sup> t <sub>2</sub> t <sub>3</sub> <sup>4</sup>	± 12.5 kHz ± 6.25 kHz ± 12.5 kHz	5.0 ms 20.0 ms 5.0 ms		

<sup>1</sup>  $t_{on}$  is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

### 6.13.2. Method of Measurements

Refer to Exhibit 8, § 8.6 of this test report and ANSI/TIA/EIA - 603 - 1992, Sec. 2.2.19, Page 83

 $t_1$  is the time period immediately following  $t_{on}$ .

 $t_2$  is the time period immediately following  $t_1$ .

 $t_3$  is the time period from the instant when the transmitter is turned off until  $t_{\rm off}$ .

t<sub>off</sub> is the instant when the 1 kHz test signal starts to rise.

<sup>2</sup> During the time from the end of t<sub>2</sub> to the beginning of t<sub>3</sub>, the frequency difference must not exceed the limits specified in § 90.213.

<sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.


<sup>4</sup> If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

# 6.13.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Function Generator	Stanford Research Systems	DS345	34591	1μHz – 30.2 MHz
Signal Generator	Gigatronic	6061A	5130408	10 kHz – 1050 MHz
Infinium Oscilloscope	Hewlett Packard	54810A	US3838019	
RF Detector	Narda	503A-03	0105	0.01 – 18 GHz
Modulation Analyzer	Hewlett Packard	8910B	3226A04606	150 kHz – 1300 MHz
Attenuator	Weinschel Corp.	46-20-34	BM1347	DC-18 GHz

# 6.13.4. Test Arrangement

The following drawings show details of the test setup for radiated emissions measurements

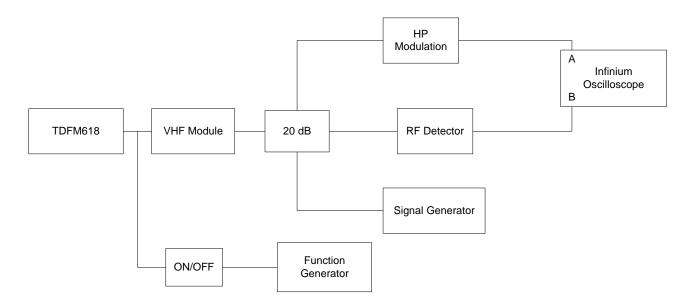


## 6.13.5. Test Data

## 6.13.5.1. 12.5 kHz Channel Spacing Operation

**Plot # 40:** Transient Frequency Behavior


Modulation: Unmodulated

Description: Switch on condition t<sub>on</sub>, t<sub>1</sub>, and t<sub>2</sub>

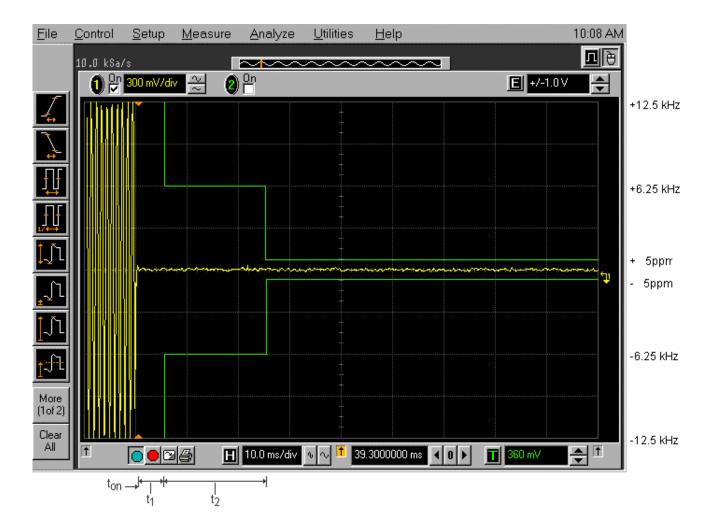

**Plot # 41:** Transient Frequency Behavior


Modulation: Unmodulated

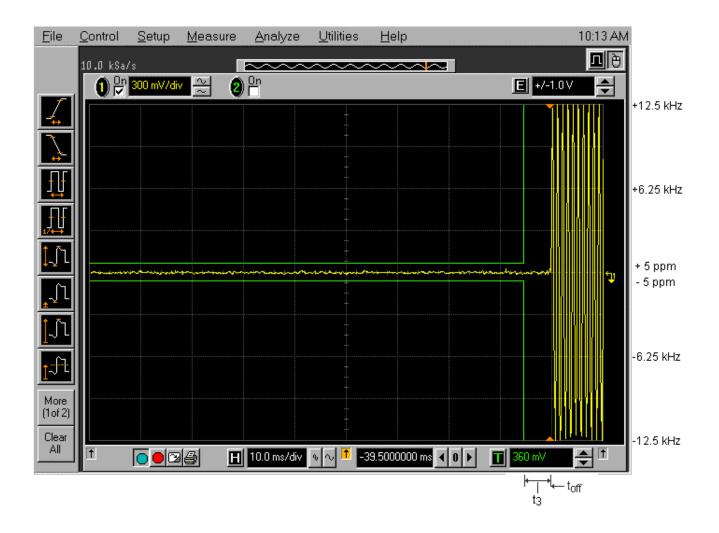

**Plot # 42:** Transient Frequency Behavior


Modulation: FM modulation with 2.5 kHz sine wave signal

Description: Switch on condition ton, t1, and t2

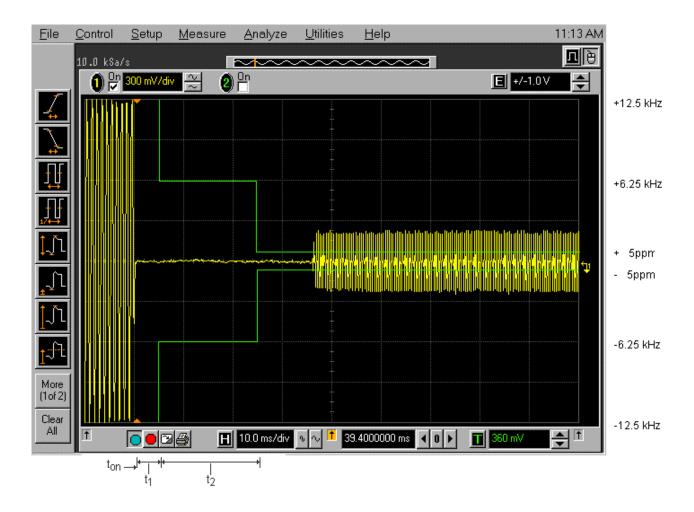

**Plot # 43:** Transient Frequency Behavior

Modulation: FM modulation with 2.5 kHz sine wave signal

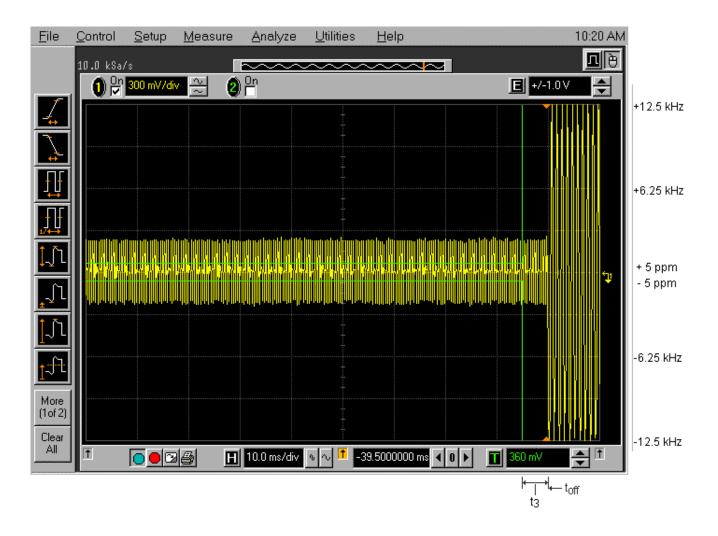


## 6.13.5.2. 25 kHz Channel Spacing Operation

**Plot # 44:** Transient Frequency Behavior


Modulation: Unmodulated

Description: Switch on condition t<sub>on</sub>, t<sub>1</sub>, and t<sub>2</sub>

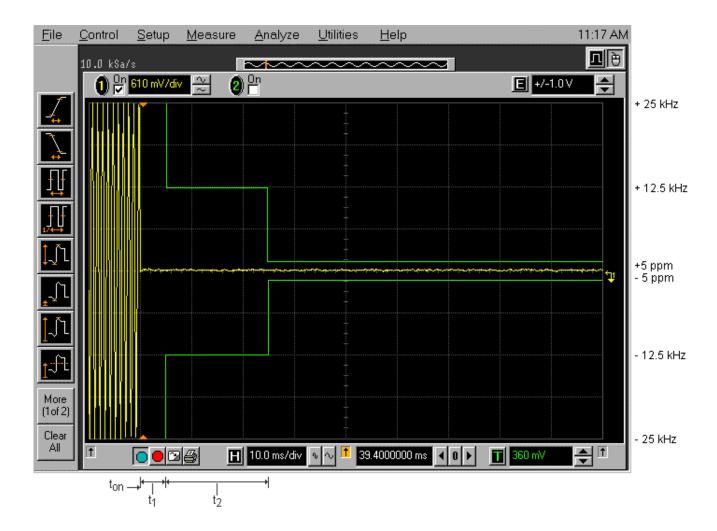

**Plot # 45:** Transient Frequency Behavior


Modulation: Unmodulated

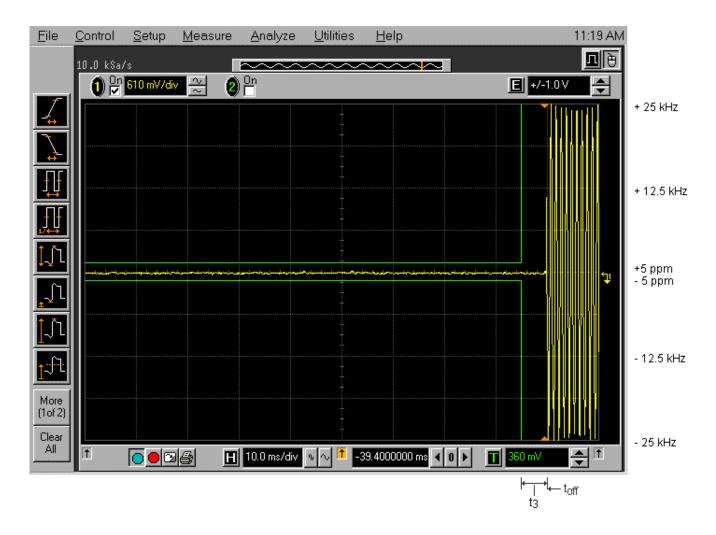

**Plot # 46:** Transient Frequency Behavior


Modulation: FM modulation with 2.5 kHz sine wave signal

Description: Switch on condition ton, t1, and t2

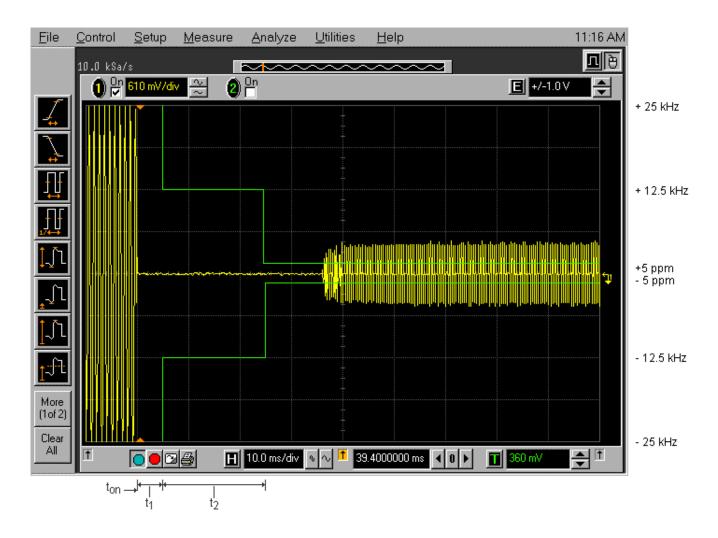

**Plot # 47:** Transient Frequency Behavior

Modulation: FM modulation with 2.5 kHz sine wave signal

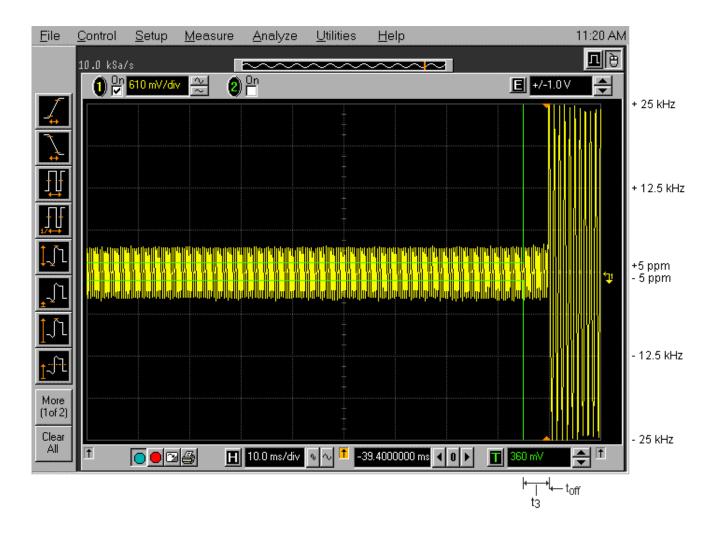

## **EXHIBIT 7. MEASUREMENT UNCERTAINTY**

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

## 7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION	PROBABILITY	UNCERTAINTY (± dB)	
(Radiated Emissions)	DISTRIBUTION	3 m	10 m
Antenna Factor Calibration	Normal (k=2)	<u>+</u> 1.0	<u>+</u> 1.0
Cable Loss Calibration	Normal (k=2)	<u>+</u> 0.3	<u>+</u> 0.5
EMI Receiver specification	Rectangular	<u>+</u> 1.5	<u>+</u> 1.5
Antenna Directivit	Rectangular	+0.5	+0.5
Antenna factor variation with height	Rectangular	<u>+</u> 2.0	<u>+</u> 0.5
Antenna phase center variation	Rectangular	0.0	<u>+</u> 0.2
Antenna factor frequency interpolation	Rectangular	<u>+</u> 0.25	<u>+</u> 0.25
Measurement distance variation	Rectangular	<u>+</u> 0.6	<u>+</u> 0.4
Site imperfections	Rectangular	<u>+</u> 2.0	<u>+</u> 2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(Bi) 0.3 (Lp)$ Uncertainty limits $20\text{Log}(1\pm\Gamma_1\Gamma_R)$	U-Shaped	+1.1	<u>+</u> 0.5
System repeatability	Std. Deviation	<u>+</u> 0.5	<u>+</u> 0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k=2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB}$$
 And  $U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$ 

## **EXHIBIT 8. MEASUREMENT METHODS**

### 8.1. CONDUCTED POWER MEASUREMENTS

- The following shall be applied to the combination(s) of the radio device and its intended antenna(e).
- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
- The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
- The measurement shall be performed using normal operation of the equipment with modulation.

Test procedure shall be as follows:

## Step 1: Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter, x = Tx on / (Tx on + Tx off) with 0 < x < 1, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


#### **Step 2**: Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$EIRP = A + G + 10log(1/x)$$

 $\{ X = 1 \text{ for continuous transmission } => 10 \log(1/x) = 0 \text{ dB } \}$ 

Figure 1.

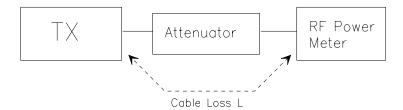

# 8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

## 8.2.1. Maximizing RF Emission Level (E-Field)

- (a) The measurements was performed with full rf output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in ÉMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor E (dBuV/m) = Reading (dBuV) + Total Correction Factor (dB/m)

(f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency
Resolution BW: 100 kHz
Video BW: same
Detector Mode: positive
Average: off

Span: 3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (1) Repeat for all different test signal frequencies

# 8.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source

Resolution BW: 10 kHz
Video BW: same
Detector Mode: positive
Average: off

Span: 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor E (dBuV/m) = Reading (dBuV) + Total Correction Factor (dB/m)

- (c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.
- (d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
  - ◆ DIPOLE antenna for frequency from 30-1000 MHz or
  - ♦ HORN antenna for frequency above 1 GHz }.
- (e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
- (f) Use one of the following antenna as a receiving antenna:
  - ♦ DIPOLE antenna for frequency from 30-1000 MHz or
  - ♦ HORN antenna for frequency above 1 GHz }.
- (g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
- (h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
- (i) Tune the EMI Receivers to the test frequency.
- (j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (1) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
- (n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$
  
 $EIRP = P + G1 = P3 + L2 - L1 + A + G1$   
 $ERP = EIRP - 2.15 dB$ 

Total Correction factor in EMI Receiver #2 = L2 - L1 + G1

- Where: P: Actual RF Power fed into the substitution antenna port after corrected.
  - P1: Power output from the signal generator
  - P2: Power measured at attenuator A input
  - P3: Power reading on the Average Power Meter
  - EIRP: EIRP after correction ERP: ERP after correction
- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
- (p) Repeat step (d) to (o) for different test frequency
- (q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
- (r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.:

**ULTRATECH GROUP OF LABS** 

File #: TIL-039FCC90

Figure 2


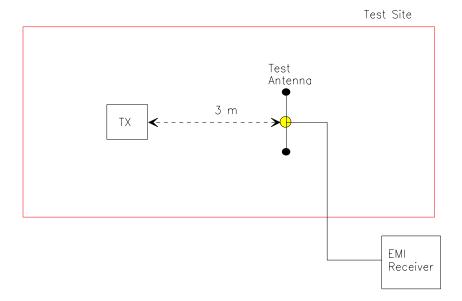


Figure 3

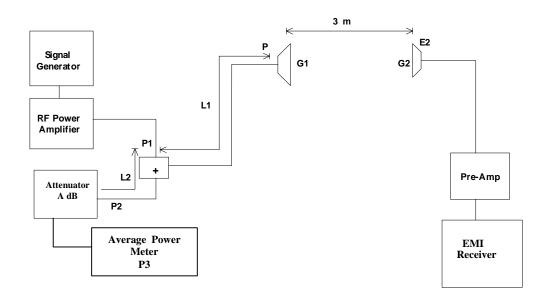

### 8.3. FREQUENCY STABILITY

Refer to FCC @ 2.1055.

- (a) The frequency stability shall be measured with variation of ambient temperature as follows: From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
  - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
  - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
  - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

## 8.4. EMISSION MASK

Voice or Digital Modulation Through a Voice Input Port @ 2.1049(c)(i):- The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.: ±2.5 KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

<u>Digital Modulation Through a Data Input Port @ 2.1049(h)</u>:- Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

The following EMI Receiver bandwidth shall be used for measurement of Emission Mask/Out-of-Band Emission Measurements:

- (1) For 25 kHz Channel Spacing: RBW = 300 Hz
- (2) For 12.5 kHz or 6.25 kHz Channel Spacings: RBW = 100 Hz

The all cases the Video Bandwidth shall be equal or greater than the measuring bandwidth.

# 8.5. SPURIOUS EMISSIONS (CONDUCTED)

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 30 kHz minimum , VBW  $\geq$  RBW and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

**FCC CFR 47, Para. 2.1057 - Frequency spectrum to be investigated:-** The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10<sup>th</sup> harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The

amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

FCC CFR 47, Para. 2.1051 - Spurious Emissions at Antenna Terminal:- The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

## 8.6. TRANSIENT FREQUENCY BEHAVIOR

- 1. Connect the transmitter under tests as shown in the above block diagram
- 2. Set the signal generator to the assigned frequency and modulate with a 1 kHz tone at ±12.5 kHz deviation and its output level to be 50 dB below the transmitter rf output at the test receiver end.
- 3. Set the horizontal sweep rate on the storage scope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz tone from the Demodulator Output Port (DOP) of the Test Receiver. Adjust the vertical scale amplitude control of the scope to display the 1000 Hz at ±4 divisions vertical Center at the display.
- 4. Adjust the scope so it will trigger on an increasing magnitude from the RF trigger signal of the transmitter under test when the transmitter was turned on. Set the controls to store the display.
- 5. The output at the DOP, due to the change in the ratio of the power between the signal generator input power and transmitter output power will, because of the capture effect of the test receiver, produce a change in display: For the first part of the sweep it will show the 1 kHz test signal. Then once the receiver's demodulator has been captured by the transmitter power, the display will show the frequency difference from the assigned frequency to the actual transmitter frequency versus time. The instant when the 1 kHz test signal is completely suppressed (including any capture time due to phasing) is considered to be t<sub>on</sub>. The trace should be maintained within the allowed divisions during the period t<sub>1</sub> and t<sub>2</sub>.
- 6. During the time from the end of t<sub>2</sub> to the beginning of t<sub>3</sub> the frequency difference should not exceed the limits set by the FCC in Part 90.214 and the outlined in the Carrier Frequency Stability sections. The allowed limit is equal to FCC frequency tolerance limits specified in FCC 90.213.
- 7. Repeat the above steps when the transmitter was turned off for measuring  $t_3$ .