
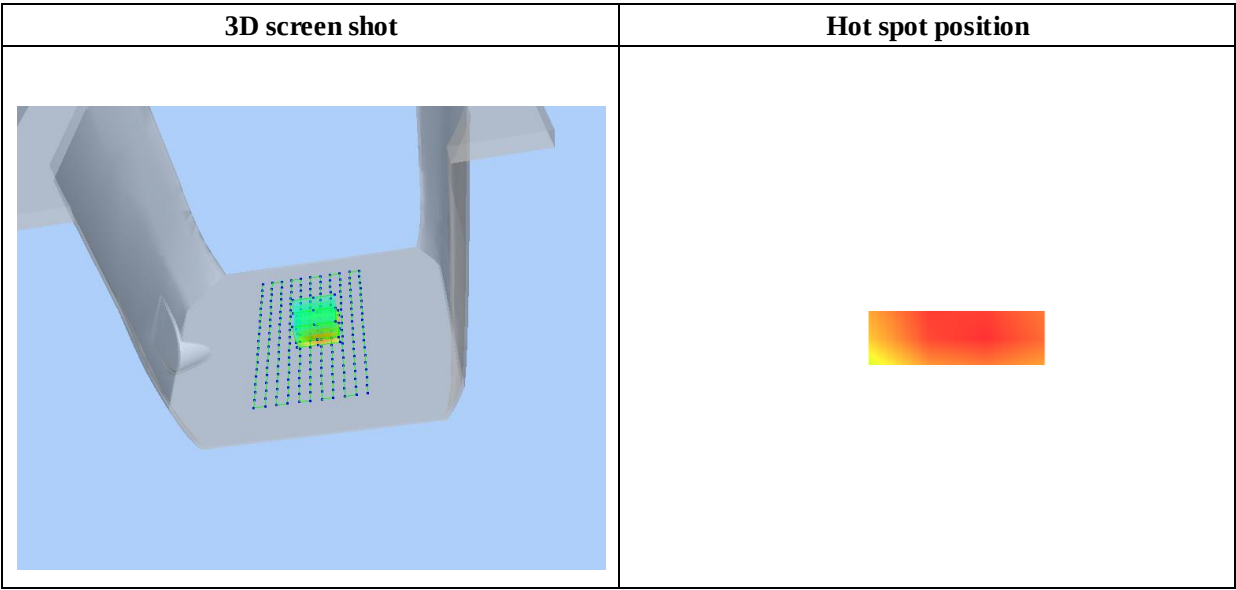


SAR Peak: 0.17 W/kg

SAR 10g (W/Kg)	0.058452
SAR 1g (W/Kg)	0.103728

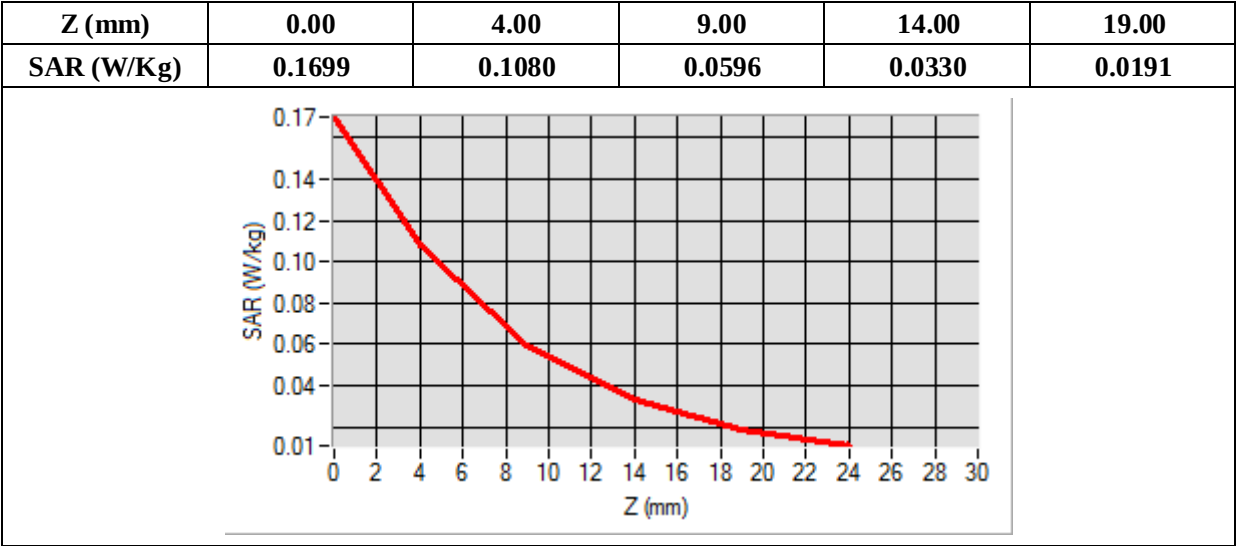

MEASUREMENT 77/118


Type: Phone measurement (Complete)
Date of measurement: 2020-11-09
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1907.600000
Relative Permittivity (real part)	51.820415
Conductivity (S/m)	1.530966
Power Variation (%)	-0.470000
Ambient Temperature	22.0
Liquid Temperature	22.2

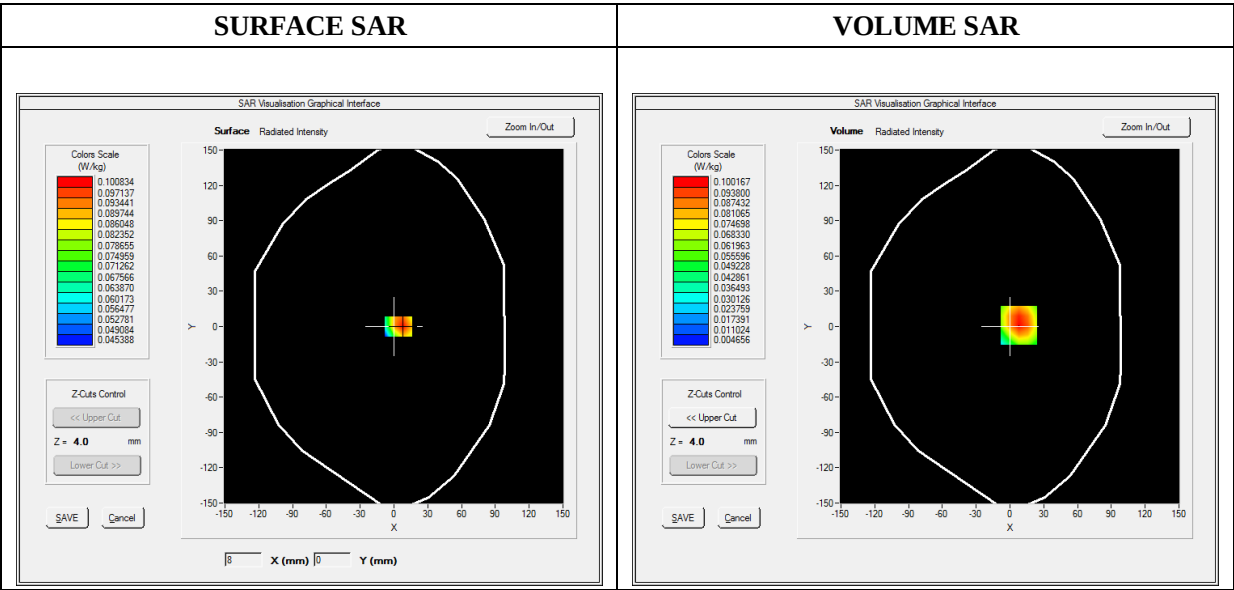

Maximum location: X=8.00, Y=1.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.054368
SAR 1g (W/Kg)	0.095351

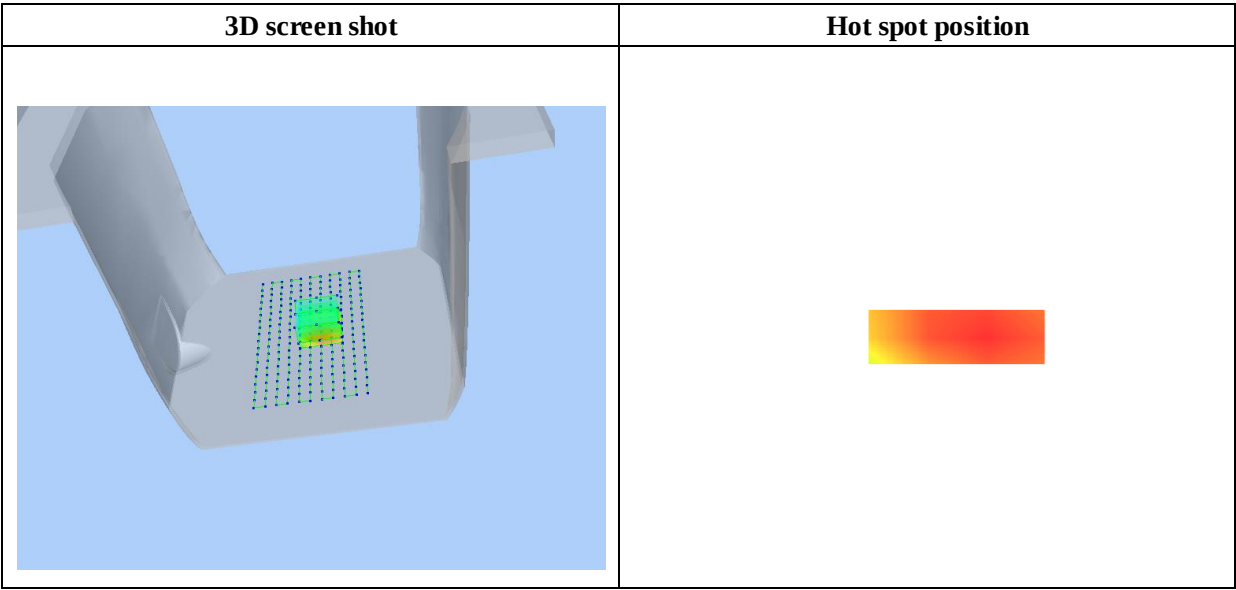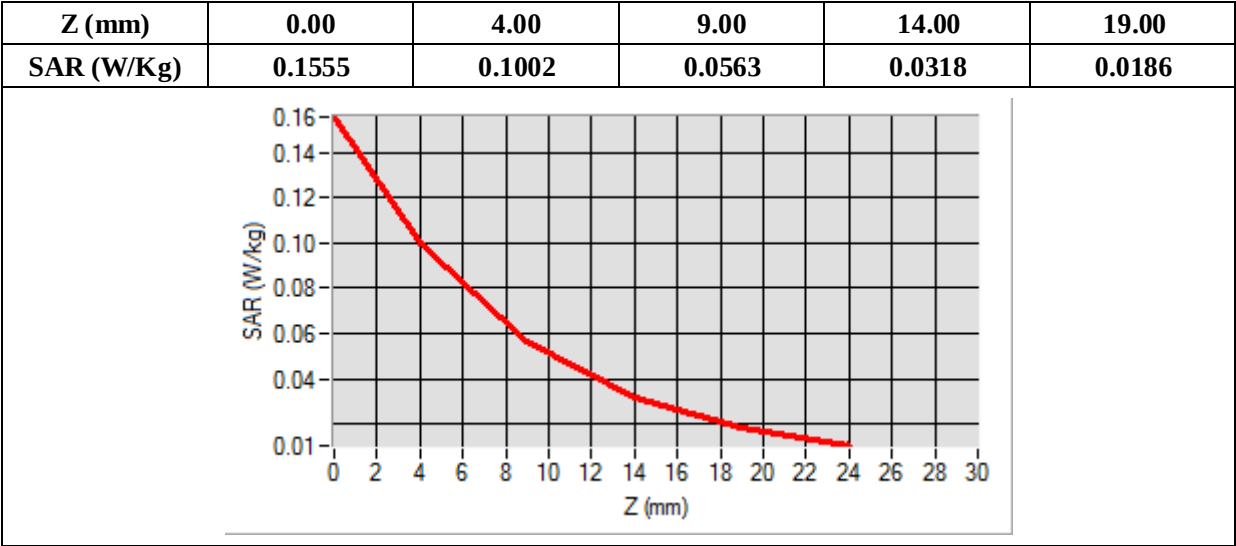

MEASUREMENT 79/122


Type: Phone measurement (Complete)
Date of measurement: 2020-11-09
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA1700_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1712.400000
Relative Permittivity (real part)	52.824060
Conductivity (S/m)	1.456085
Power Variation (%)	-0.500000
Ambient Temperature	22.0
Liquid Temperature	22.2

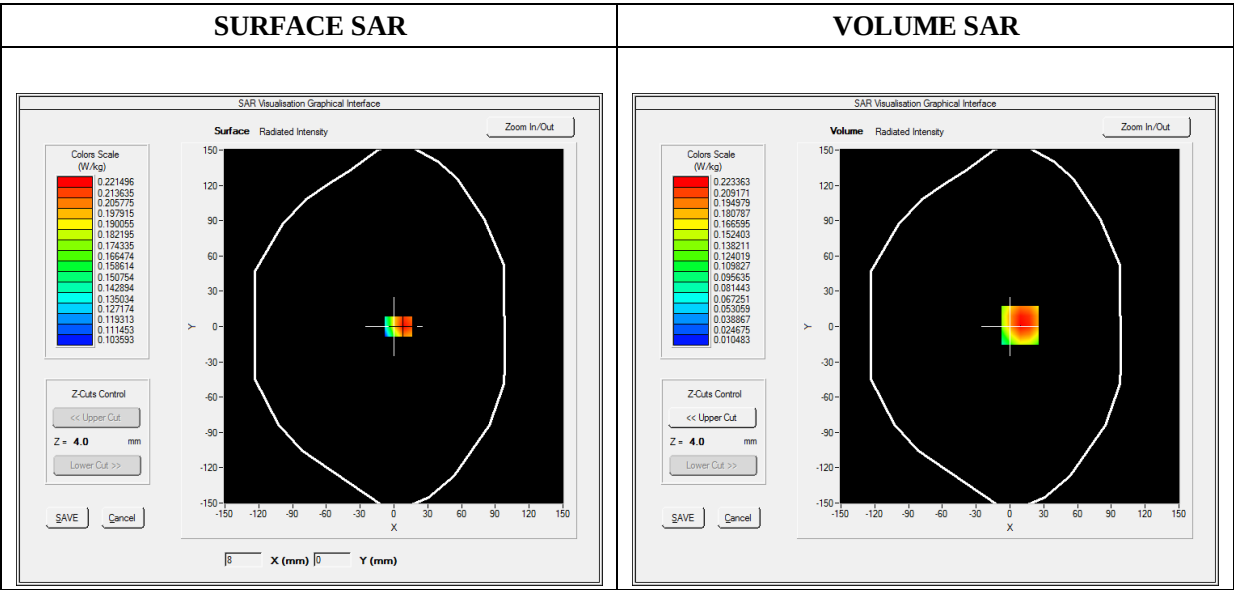

Maximum location: X=9.00, Y=1.00

SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.131119
SAR 1g (W/Kg)	0.215122

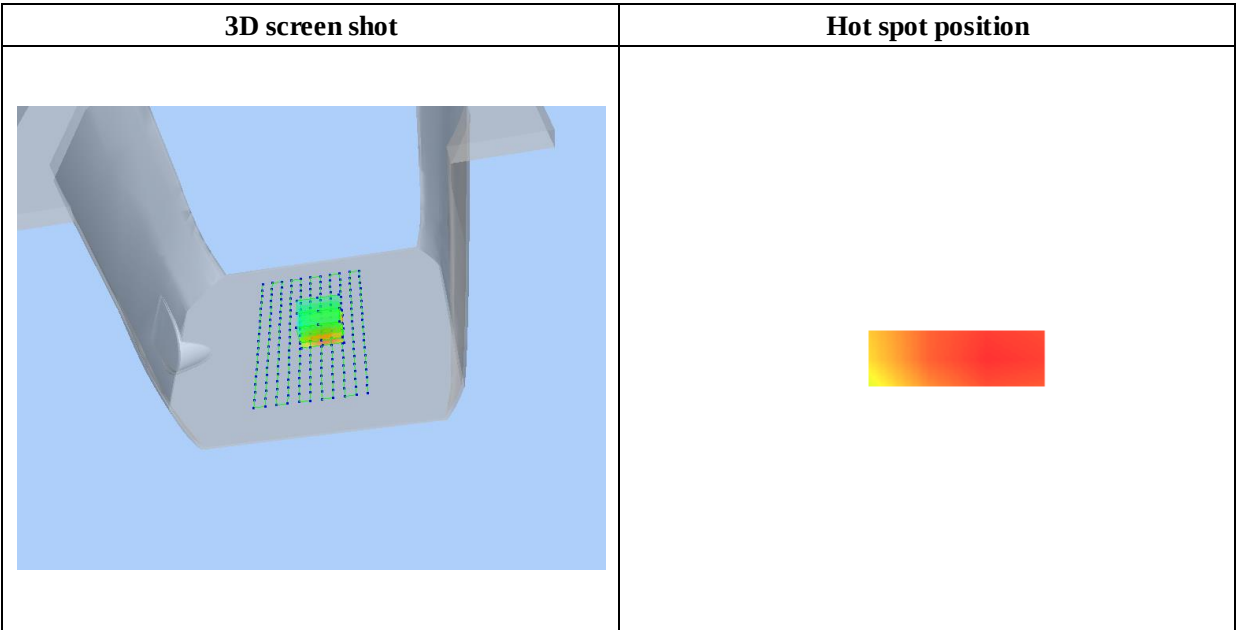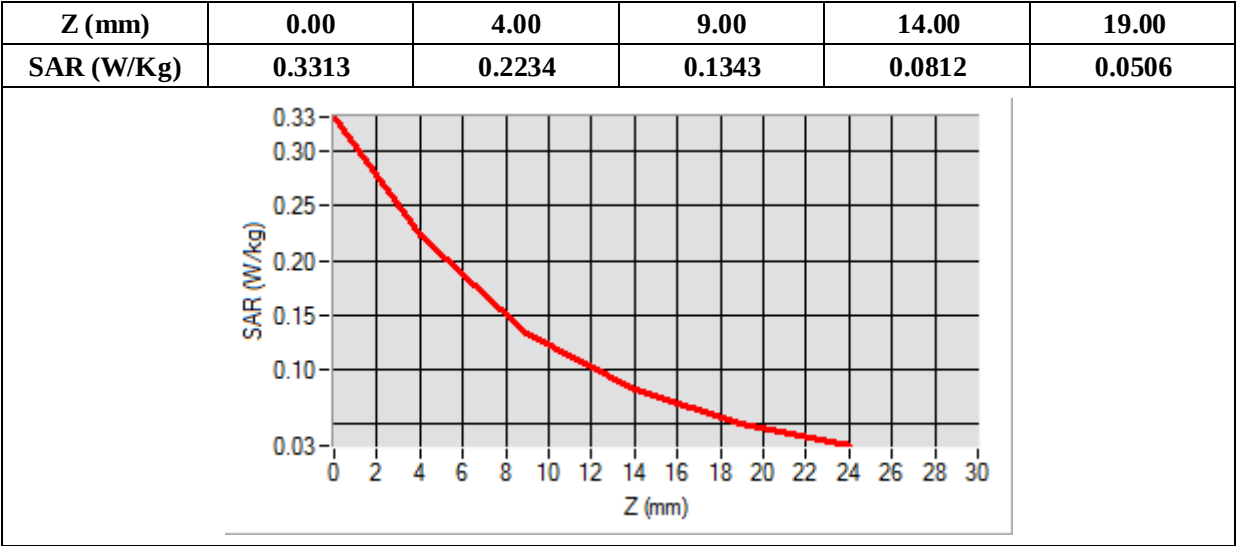

MEASUREMENT 81/126


Type: Phone measurement (Complete)
Date of measurement: 2020-10-29
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative Permittivity (real part)	55.751214
Conductivity (S/m)	0.962454
Power Variation (%)	-1.350000
Ambient Temperature	22.0
Liquid Temperature	22.2

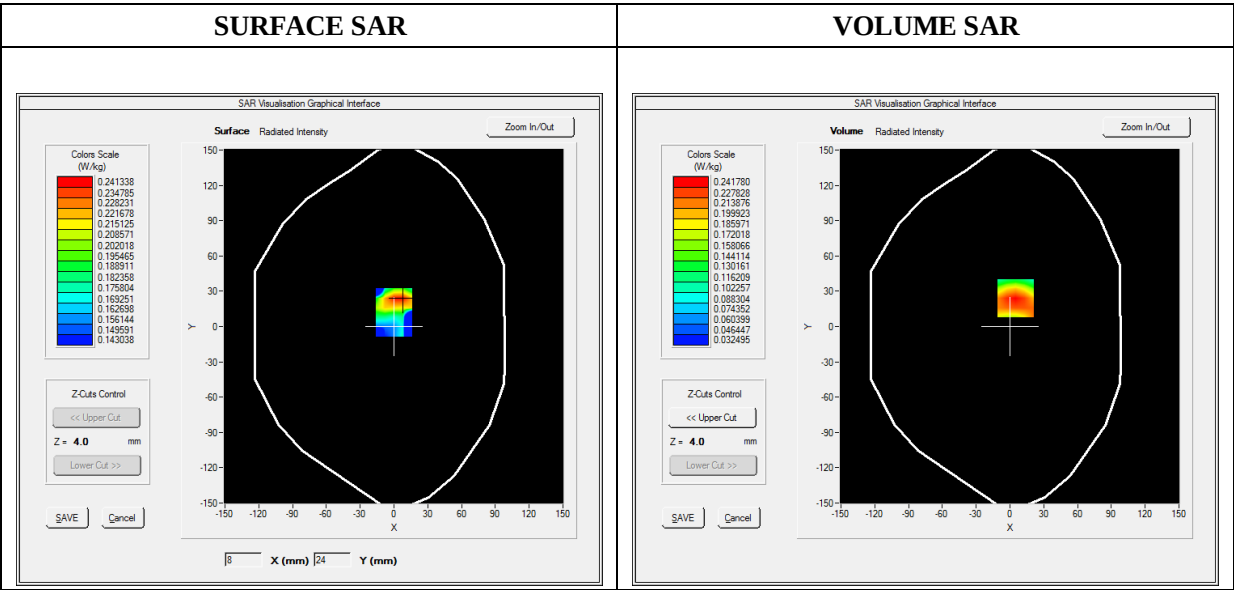

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.146392
SAR 1g (W/Kg)	0.231989

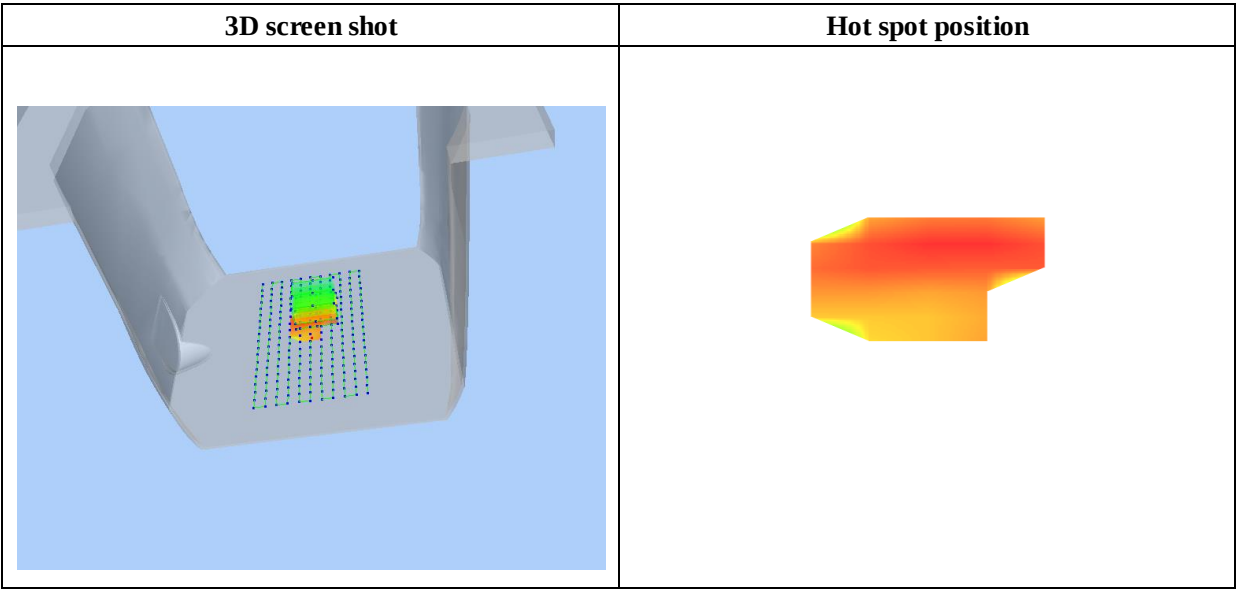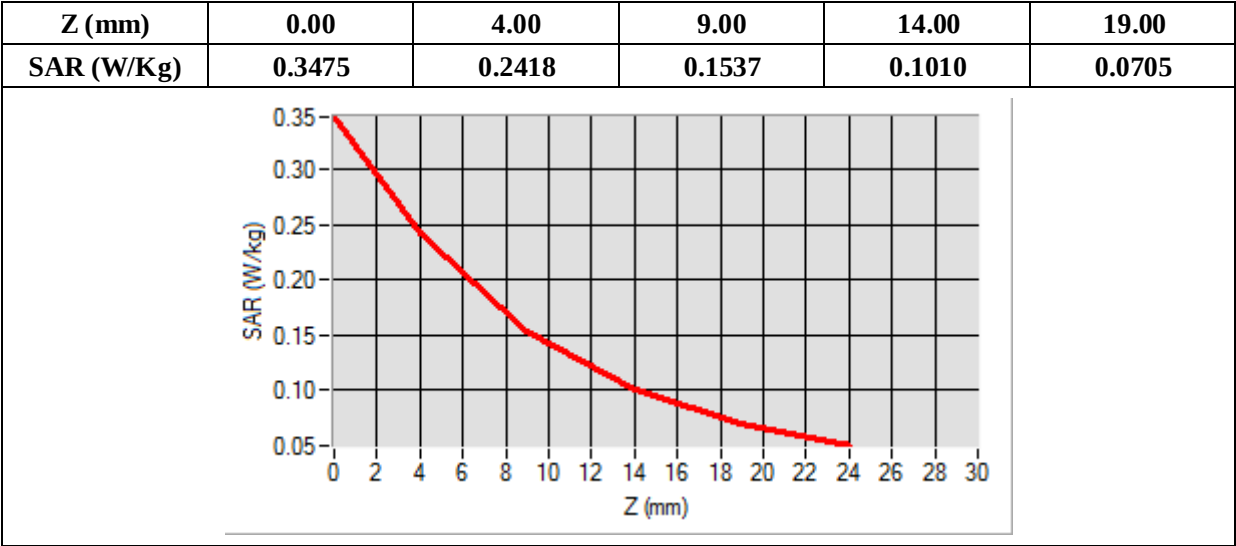

MEASUREMENT 83/131

Type: Phone measurement (Complete)

Date of measurement: 2020-11-09

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 2
Channels	QPSK, 20MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1860.000000
Relative Permittivity (real part)	53.402415
Conductivity (S/m)	1.501966
Power Variation (%)	-0.190000
Ambient Temperature	22.0
Liquid Temperature	22.2

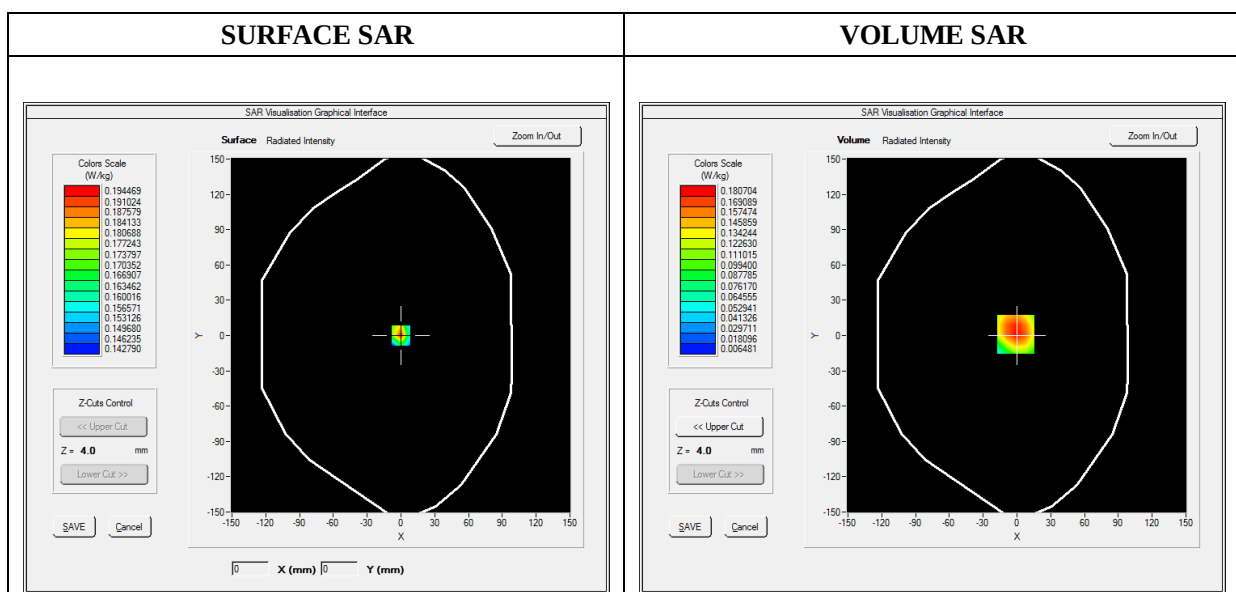

Maximum location: X=-1.00, Y=1.00

SAR Peak: 0.28 W/kg

SAR 10g (W/Kg)	0.099868
SAR 1g (W/Kg)	0.172815

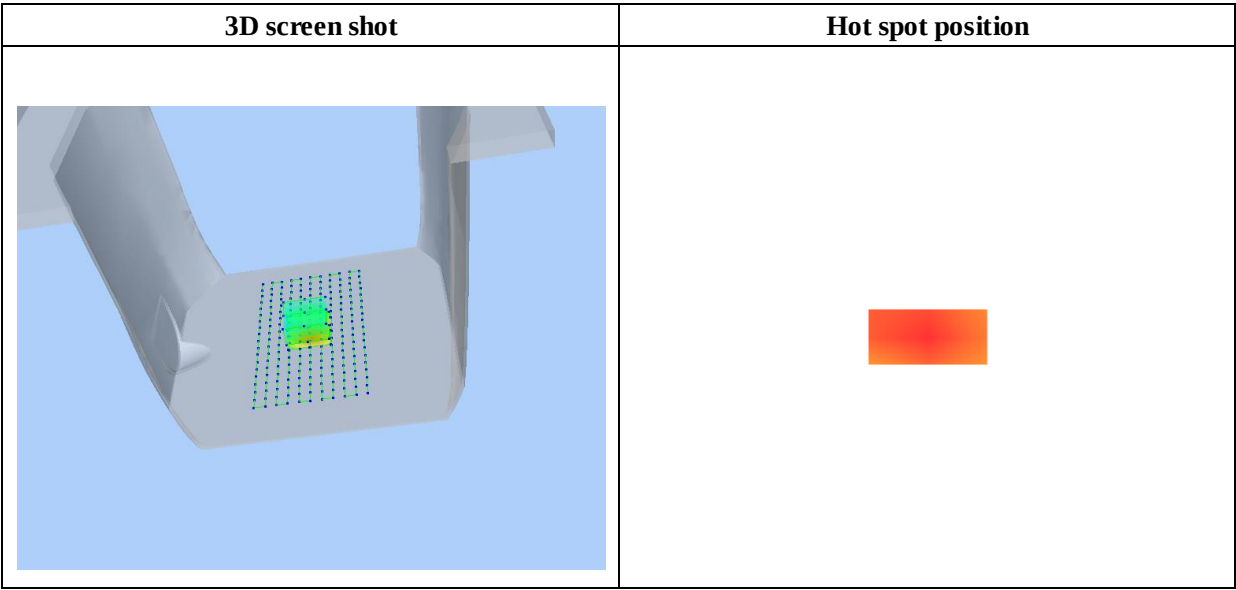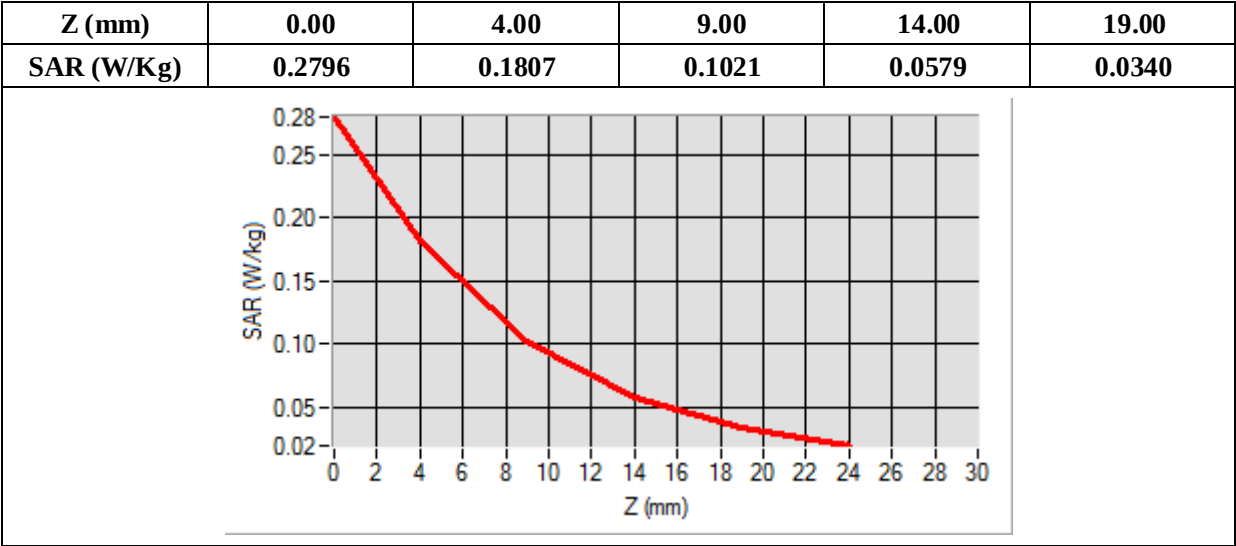

MEASUREMENT 87/139


Type: Phone measurement (Complete)
Date of measurement: 2020-11-09
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 4
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	1720.000000
Relative Permittivity (real part)	52.824060
Conductivity (S/m)	1.456085
Power Variation (%)	-0.860000
Ambient Temperature	22.0
Liquid Temperature	22.2

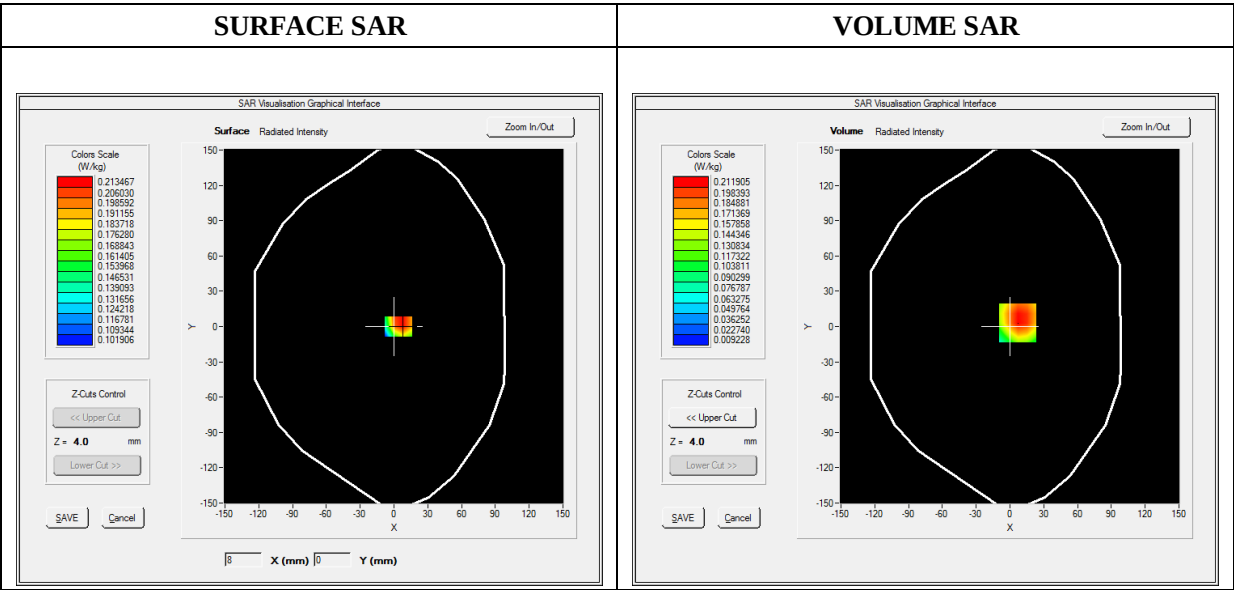

SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)	0.124672
SAR 1g (W/Kg)	0.204904

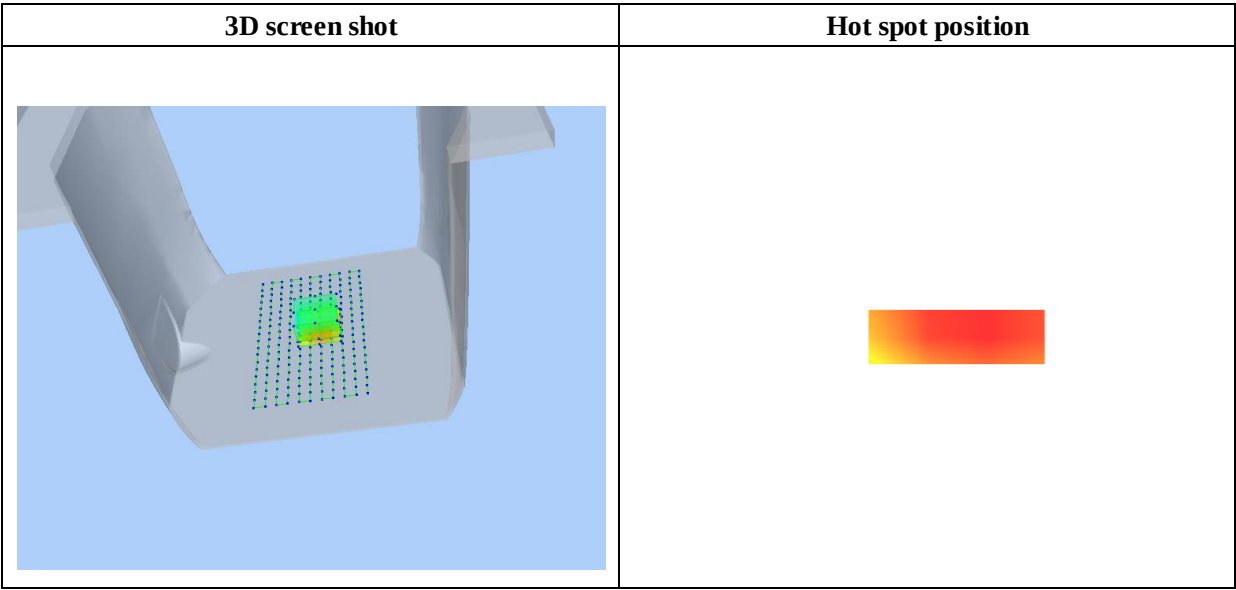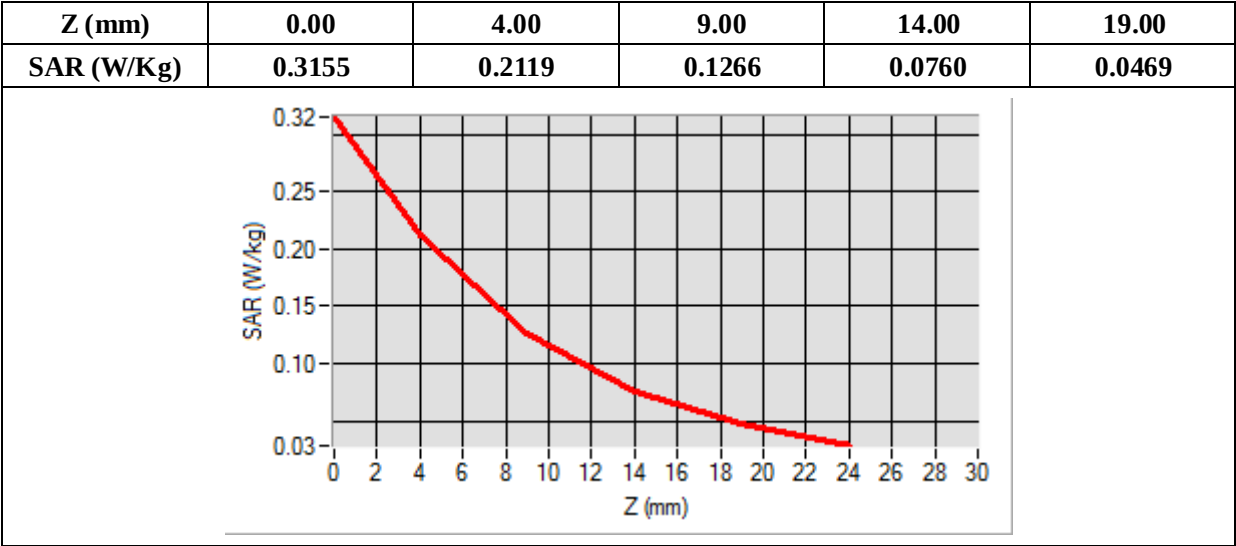

MEASUREMENT 91/147


Type: Phone measurement (Complete)
Date of measurement: 2020-10-29
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 5
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	836.500000
Relative Permittivity (real part)	55.681264
Conductivity (S/m)	0.966454
Power Variation (%)	-0.810000
Ambient Temperature	22.0
Liquid Temperature	22.2

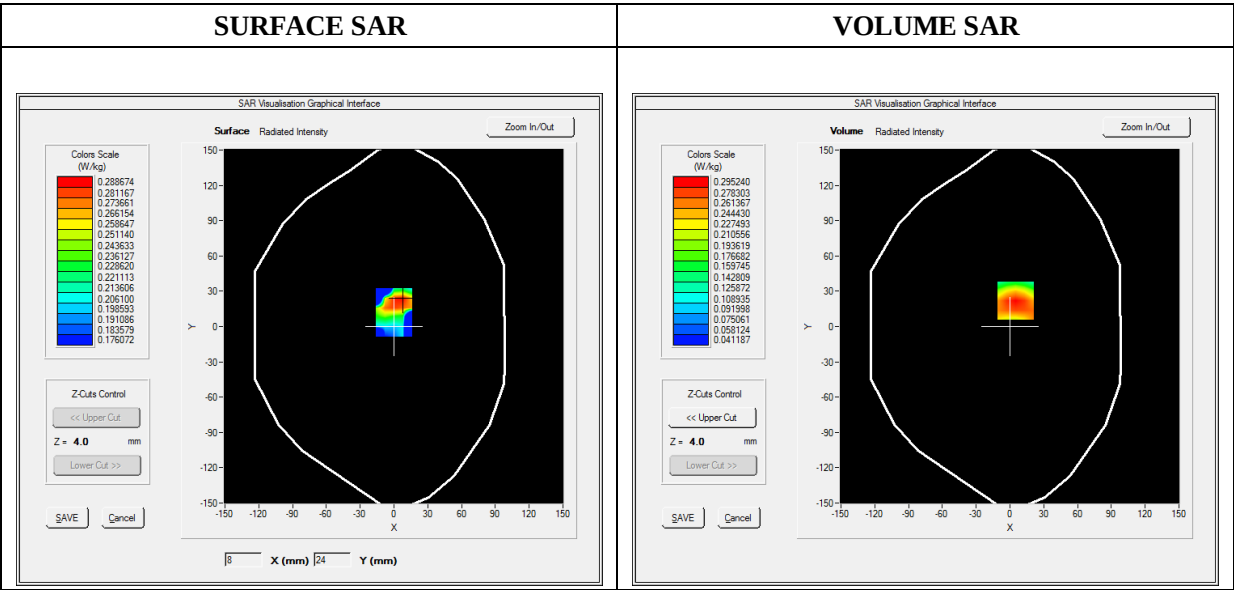

Maximum location: X=5.00, Y=22.00

SAR Peak: 0.42 W/kg

SAR 10g (W/Kg)	0.180196
SAR 1g (W/Kg)	0.281924

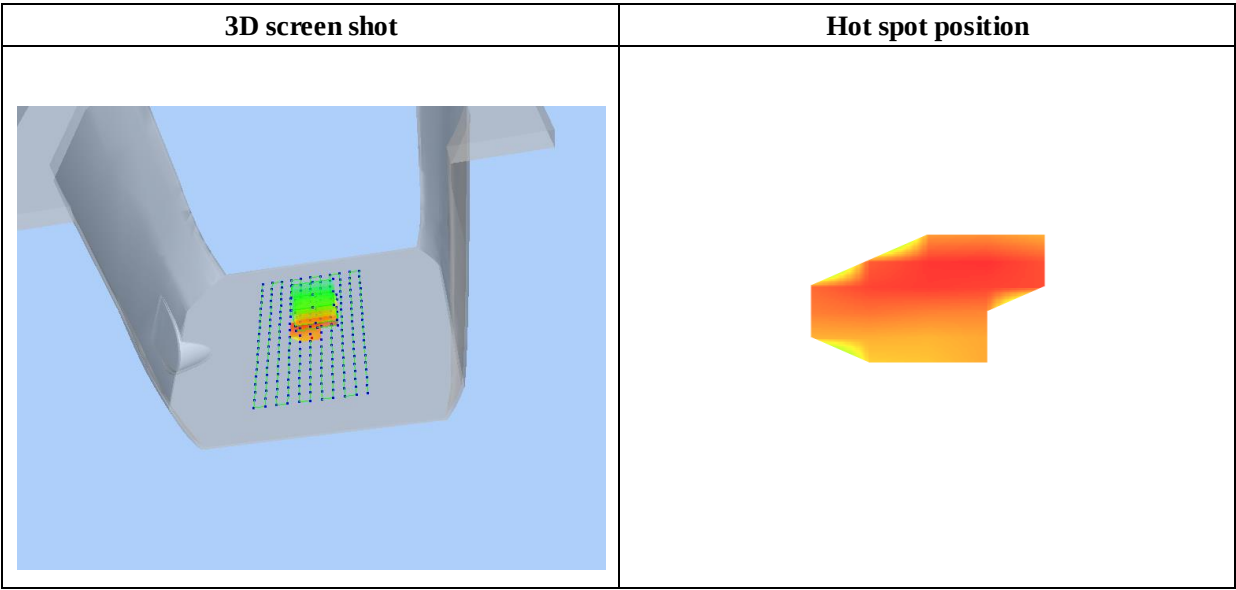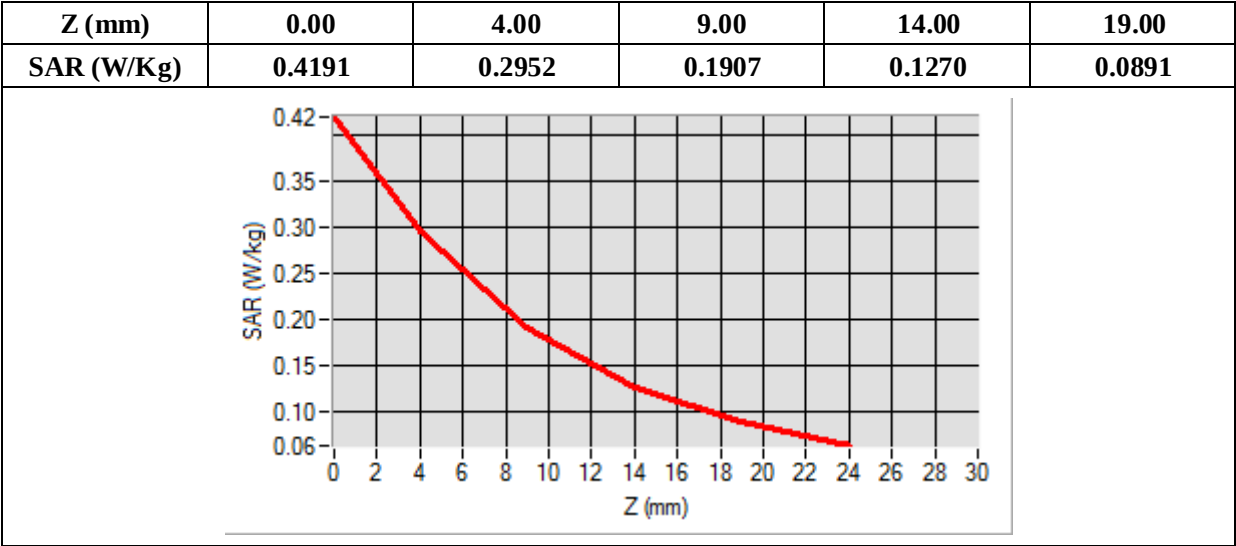

MEASUREMENT 96/158

Type: Phone measurement (Complete)

Date of measurement: 2020-11-10

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 7
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2510.000000
Relative Permittivity (real part)	52.830001
Conductivity (S/m)	2.142787
Power Variation (%)	-1.010000
Ambient Temperature	22.0
Liquid Temperature	22.2

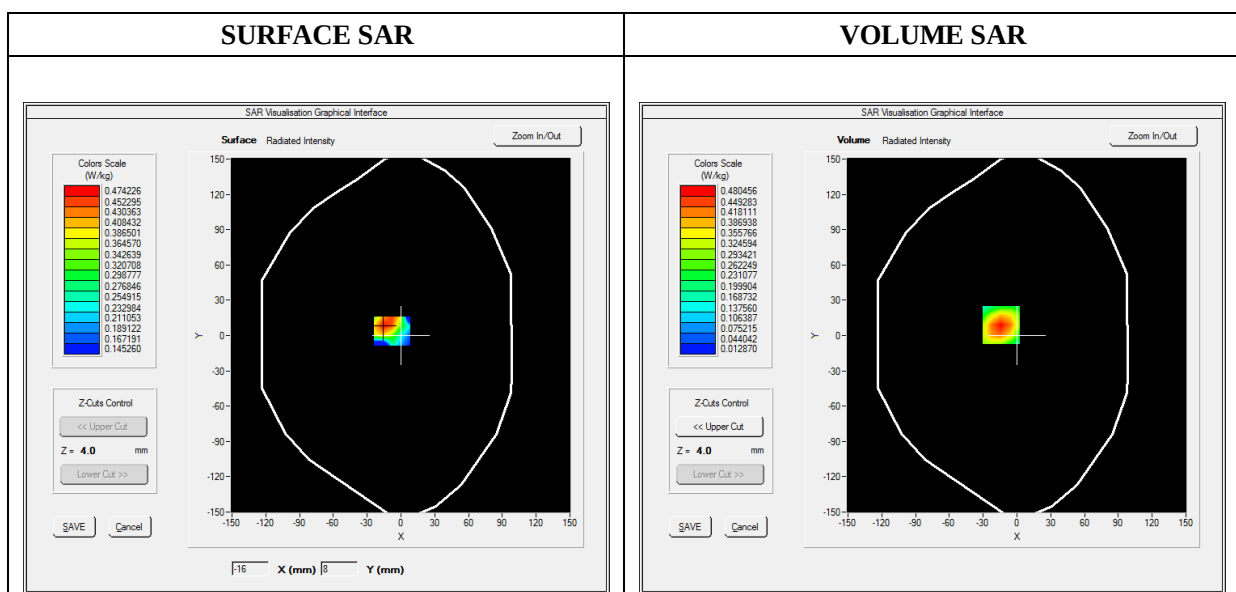

Maximum location: X=-14.00, Y=9.00

SAR Peak: 0.82 W/kg

SAR 10g (W/Kg)	0.229668
SAR 1g (W/Kg)	0.452259

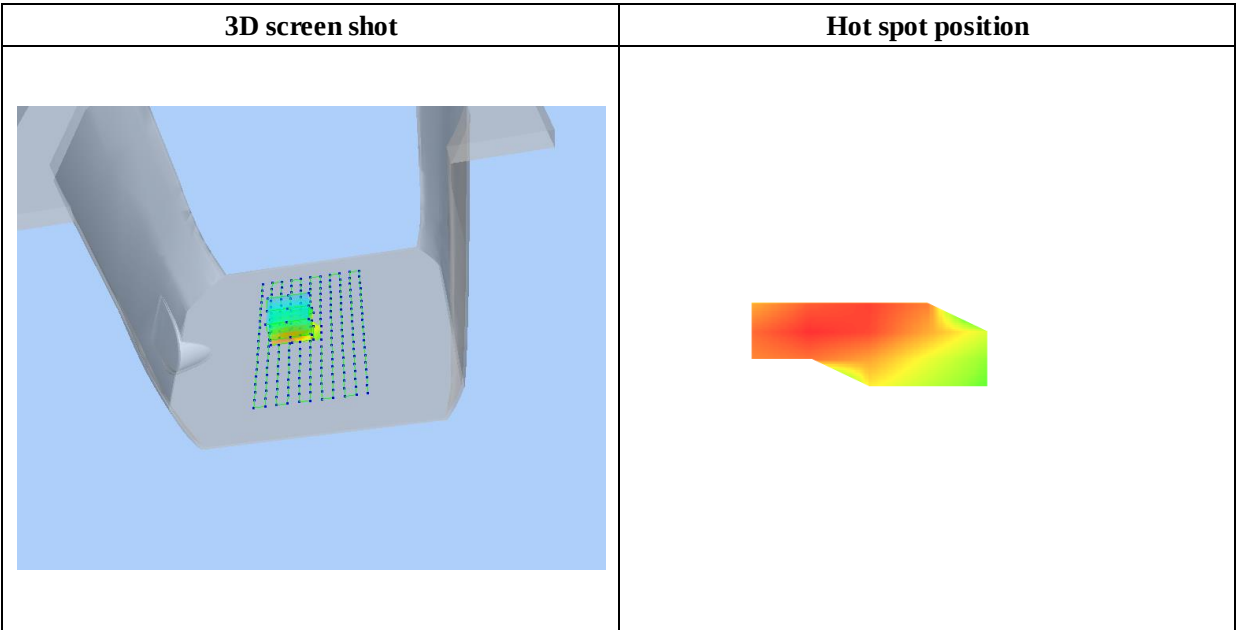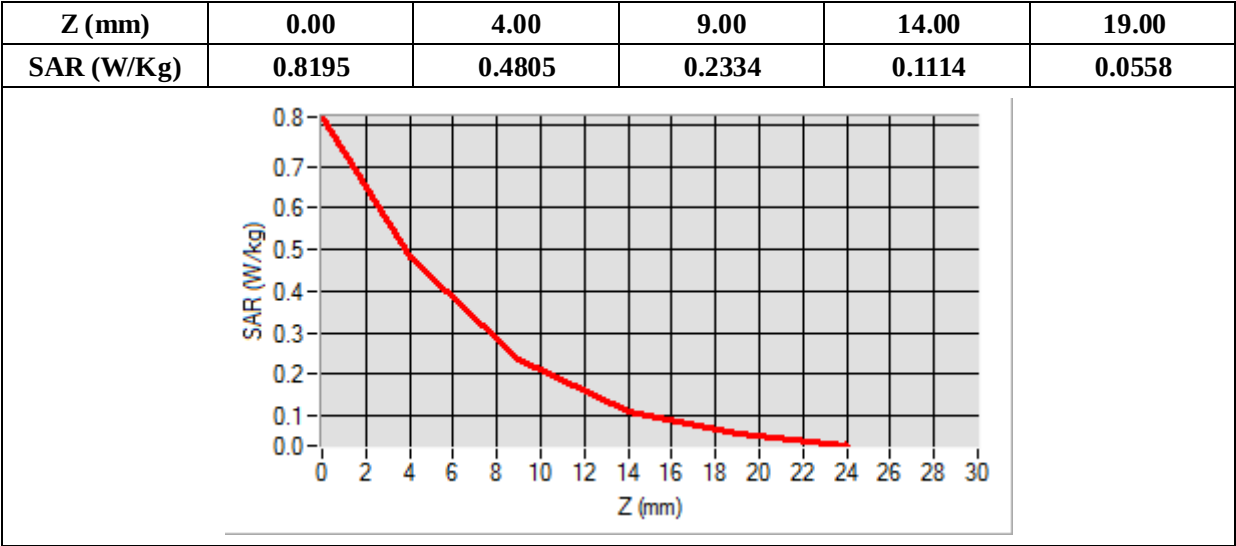

MEASUREMENT 100/166


Type: Phone measurement (Complete)
Date of measurement: 2020-10-29
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 17
Channels	QPSK, 10MHz, 1RB, Low
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	709.000000
Relative Permittivity (real part)	56.304515
Conductivity (S/m)	0.930042
Power Variation (%)	-1.370000
Ambient Temperature	22.0
Liquid Temperature	22.2

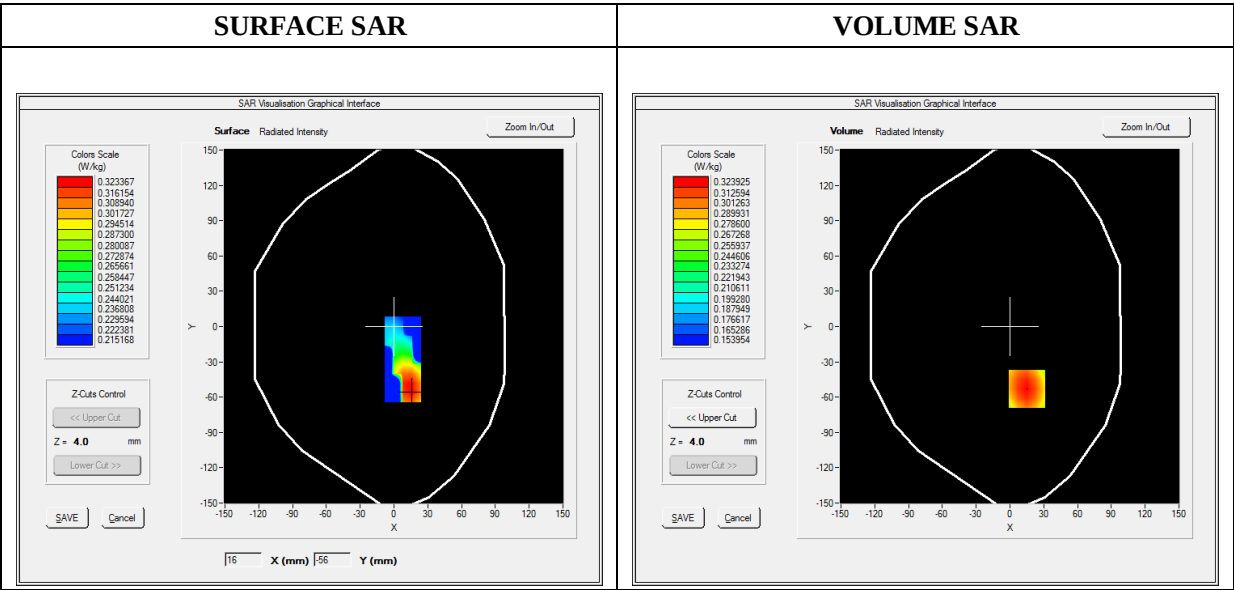

SAR Peak: 0.36 W/kg

SAR 10g (W/Kg)	0.280516
SAR 1g (W/Kg)	0.335086

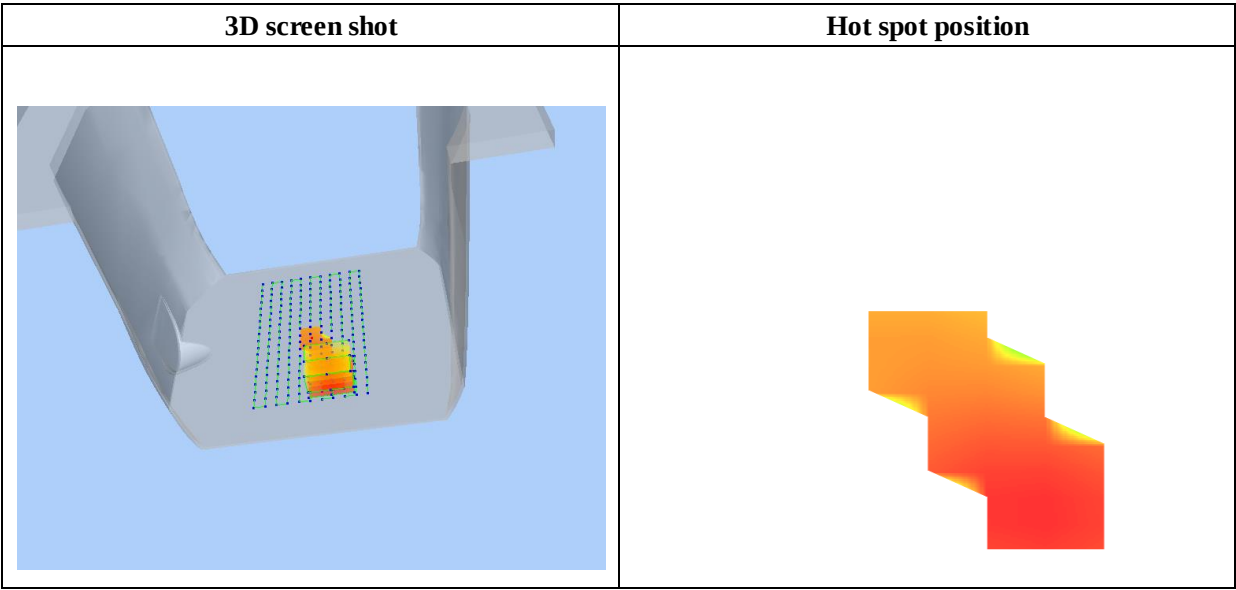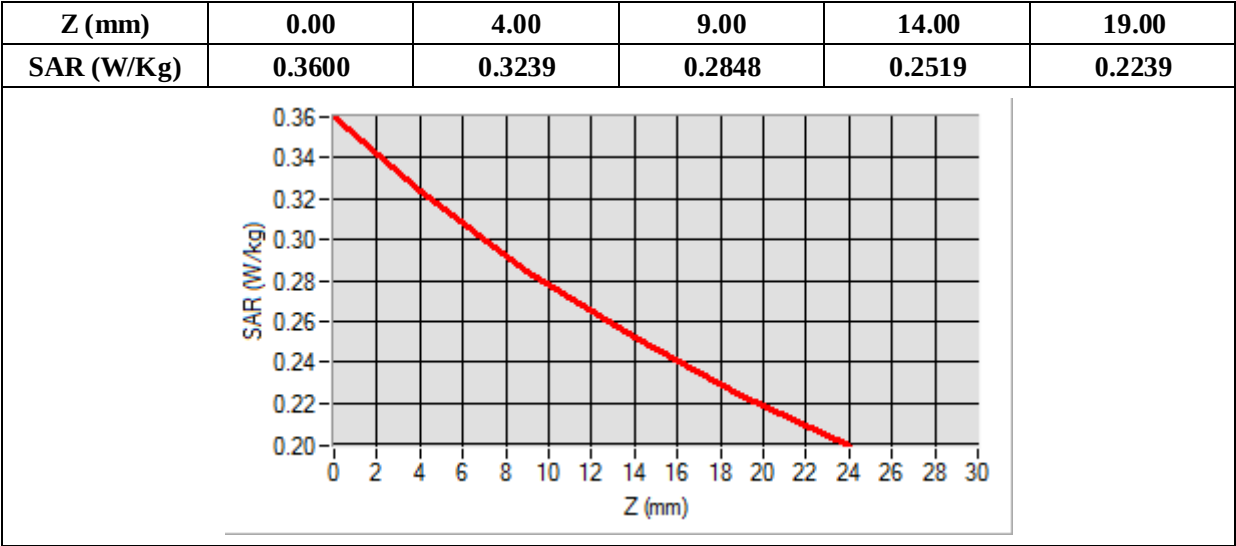

MEASUREMENT 103/175

Type: Phone measurement (Complete)

Date of measurement: 2020-11-10

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2412.000000
Relative Permittivity (real part)	53.580268
Conductivity (S/m)	1.952865
Power Variation (%)	0.360000
Ambient Temperature	22.0
Liquid Temperature	22.2

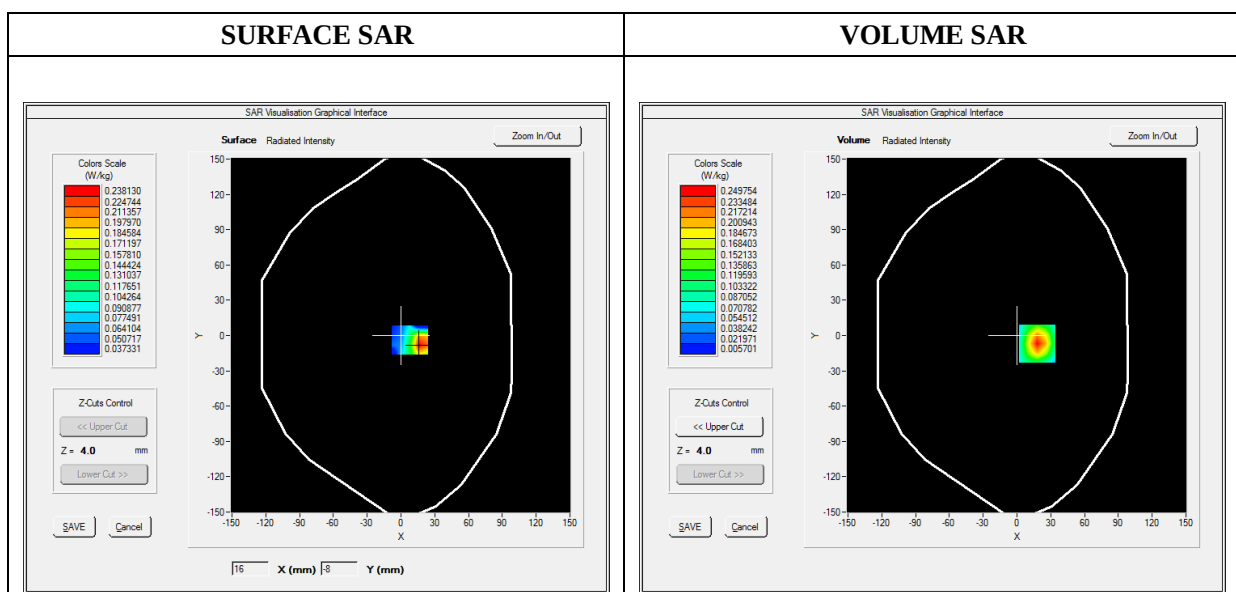

Maximum location: X=18.00, Y=-7.00

SAR Peak: 0.43 W/kg

SAR 10g (W/Kg)	0.108759
SAR 1g (W/Kg)	0.230133

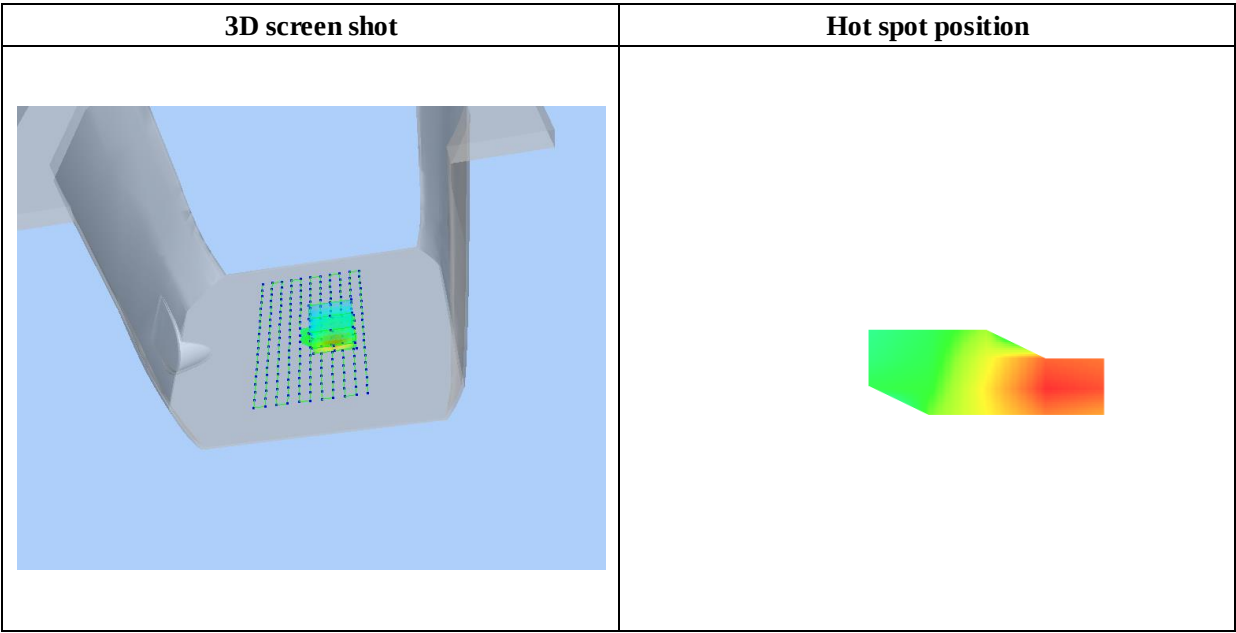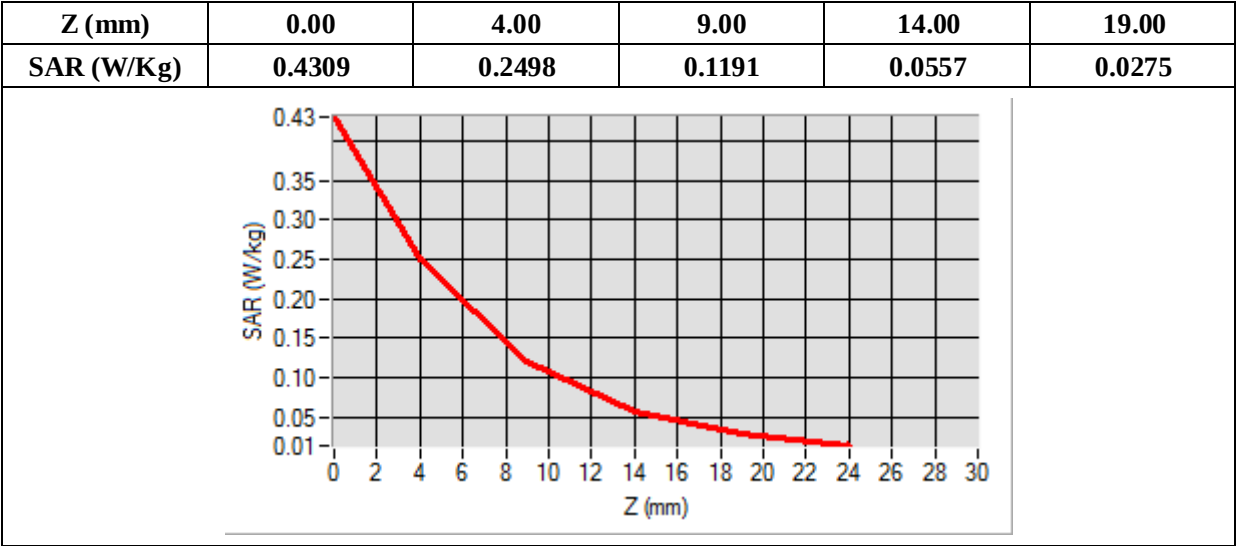

MEASUREMENT 105

Type: Phone measurement (Complete)

Date of measurement: 2020-11-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	5.2GWiFi_802.11a
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	5240.000000
Relative Permittivity (real part)	49.959009
Conductivity (S/m)	5.290071
Power Variation (%)	1.100000
Ambient Temperature	22.0
Liquid Temperature	22.0

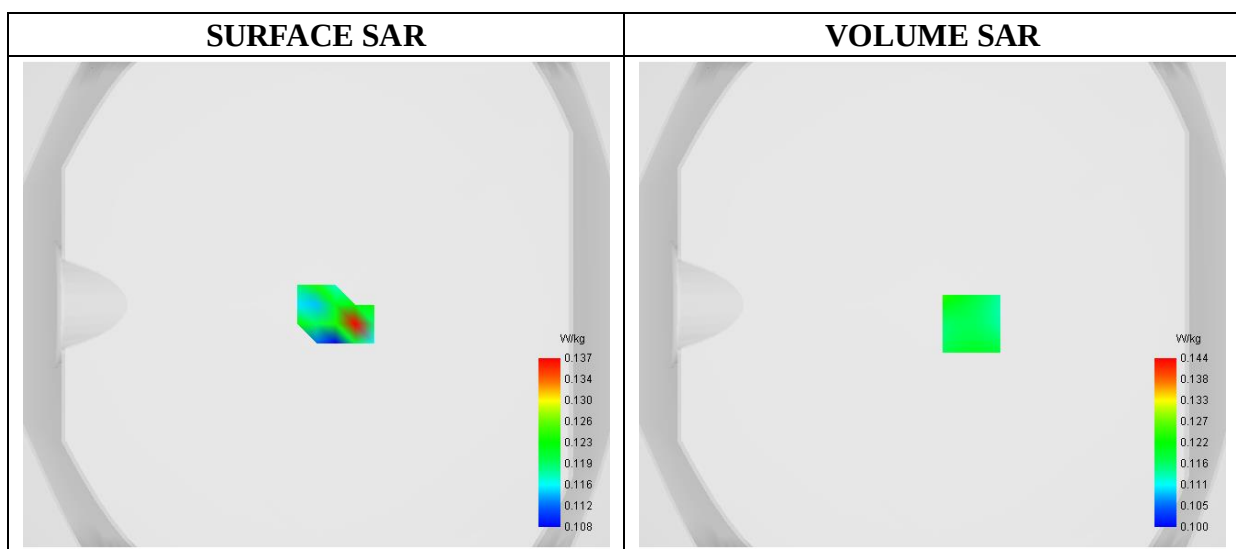

Maximum location: X=16.00, Y=-8.00

SAR 10g (W/Kg)	0.119314
SAR 1g (W/Kg)	0.123442

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.1402	0.1246	0.1216	0.1143	0.1228	0.1121	0.1197	0.1155	0.1131

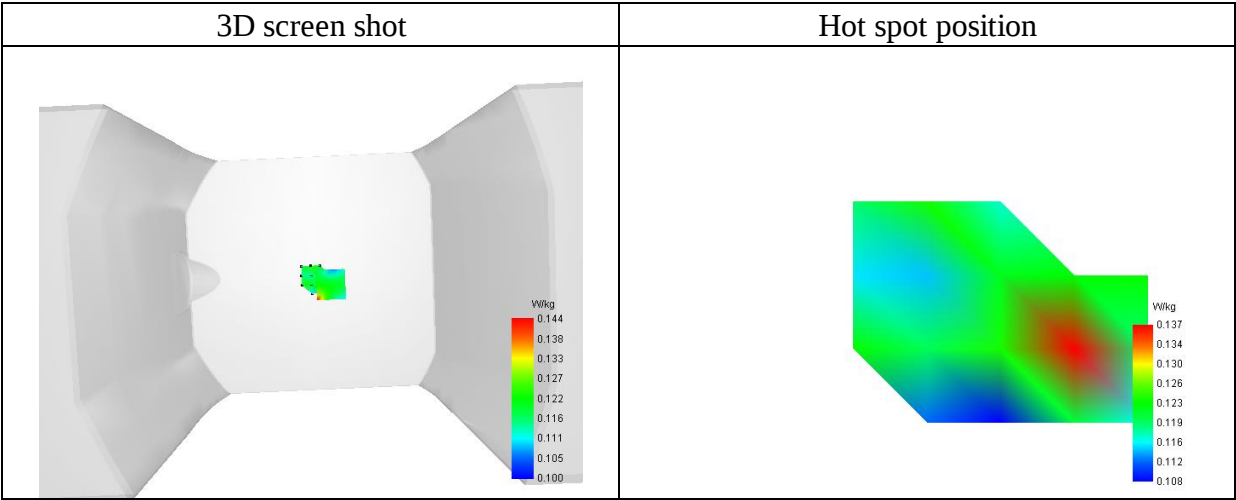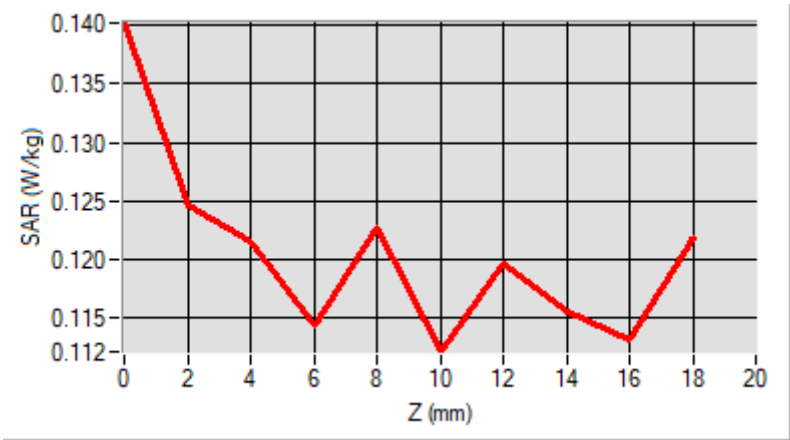

MEASUREMENT 181

Type: Phone measurement (Complete)

Date of measurement: 2020-11-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right
Band	5.2GWiFi_802.11a
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	5240.000000
Relative Permittivity (real part)	49.959009
Conductivity (S/m)	5.290071
Power Variation (%)	1.340000
Ambient Temperature	22.0
Liquid Temperature	22.0

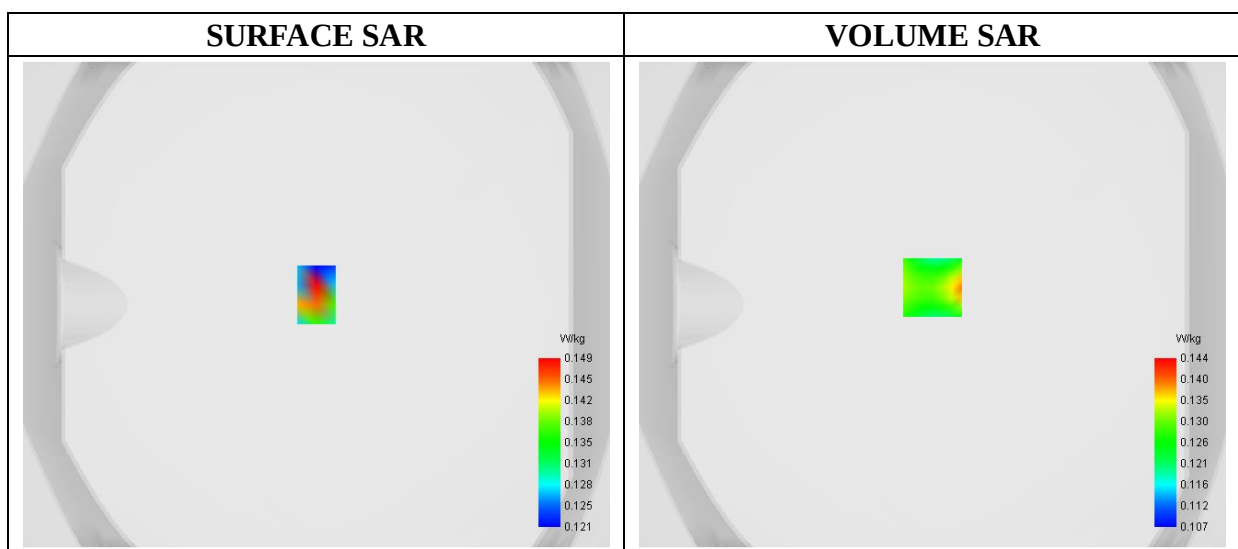

Maximum location: X=0.00, Y=7.00

SAR 10g (W/Kg)	0.130227
SAR 1g (W/Kg)	0.132364

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.1450	0.1387	0.1378	0.1138	0.1437	0.1071	0.1435	0.1122	0.1395

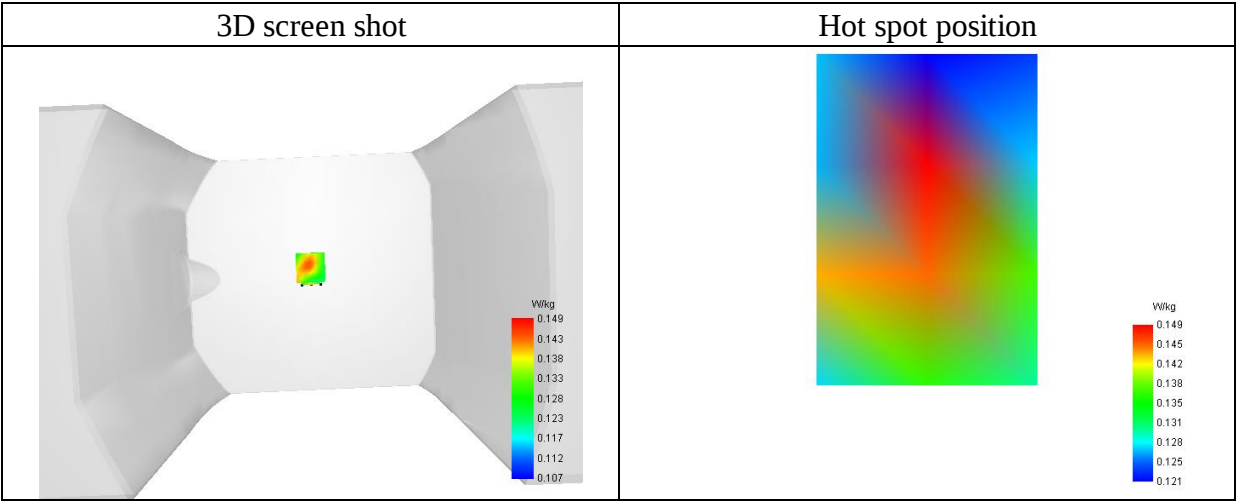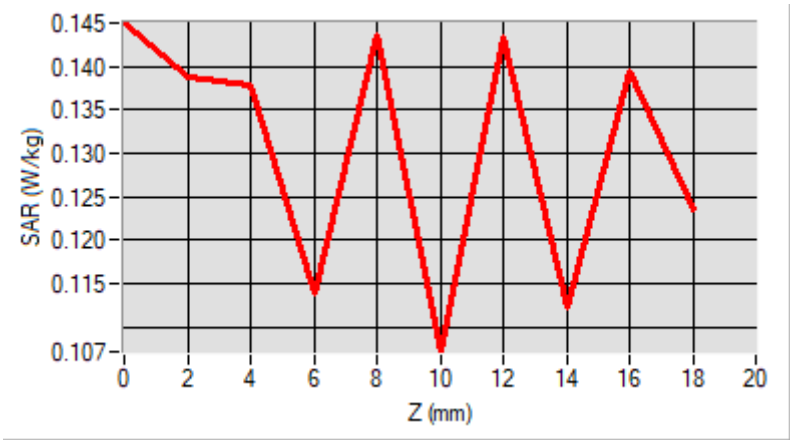

MEASUREMENT 108/184

Type: Phone measurement (Complete)

Date of measurement: 2020-11-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	5.2GWiFi_802.11 n (HT40)
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	5755.000000
Relative Permittivity (real part)	48.275002
Conductivity (S/m)	5.797514
Power Variation (%)	-1.030000
Ambient Temperature	22.0
Liquid Temperature	22.0

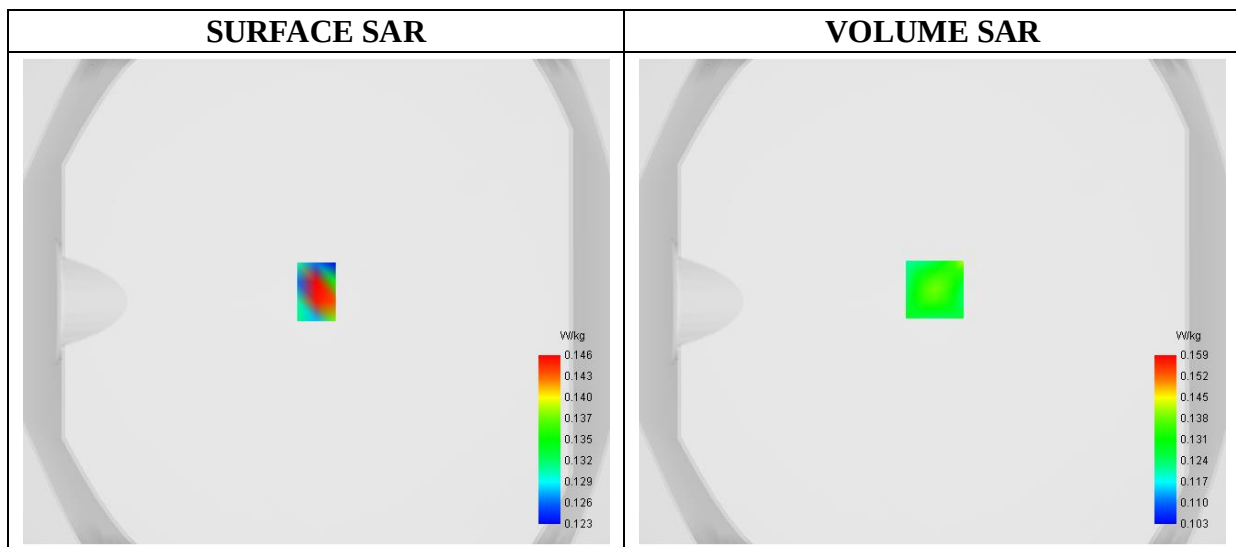

Maximum location: X=1.00, Y=5.00

SAR 10g (W/Kg)	0.139790
SAR 1g (W/Kg)	0.150093

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.1513	0.1421	0.1275	0.1346	0.1272	0.1298	0.1286	0.1270	0.1357

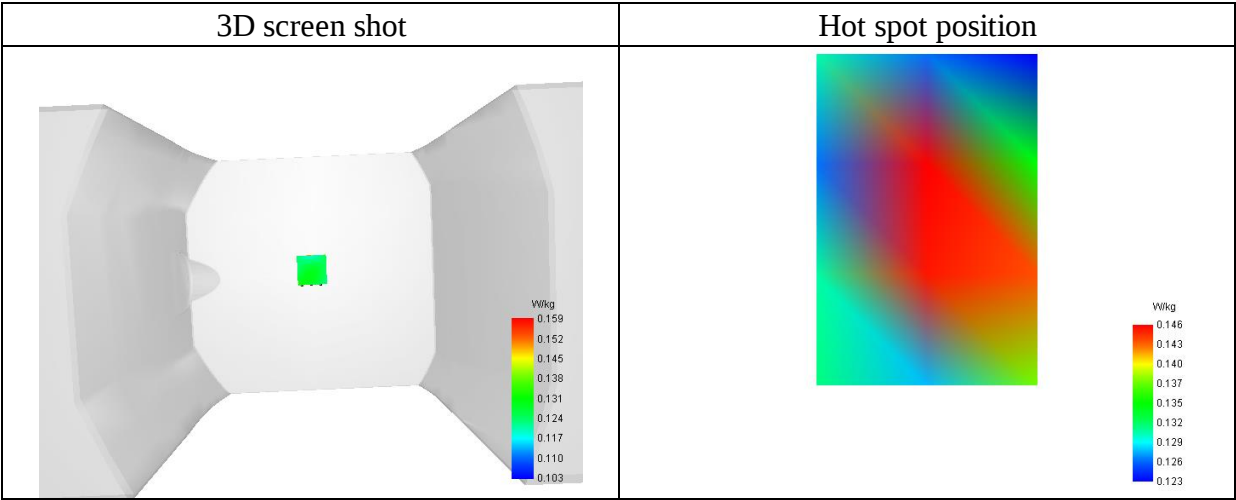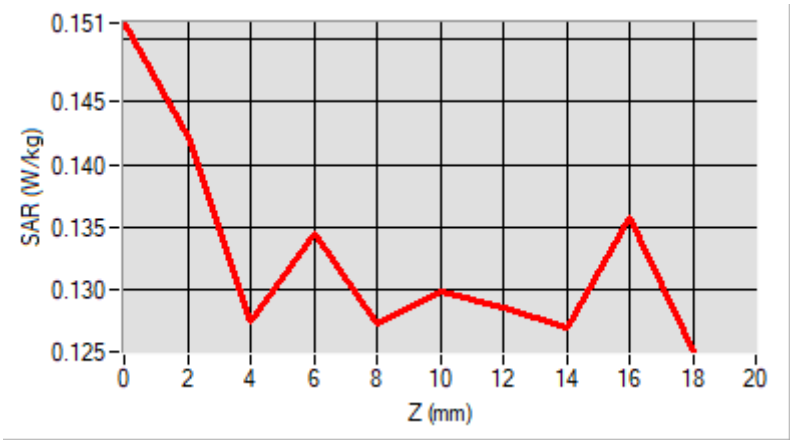

Annex C. EUT Photos

EUT View Front



EUT View Back




Antenna View




Annex D. Test Setup Photos

Head Exposure Conditions

Right Cheek

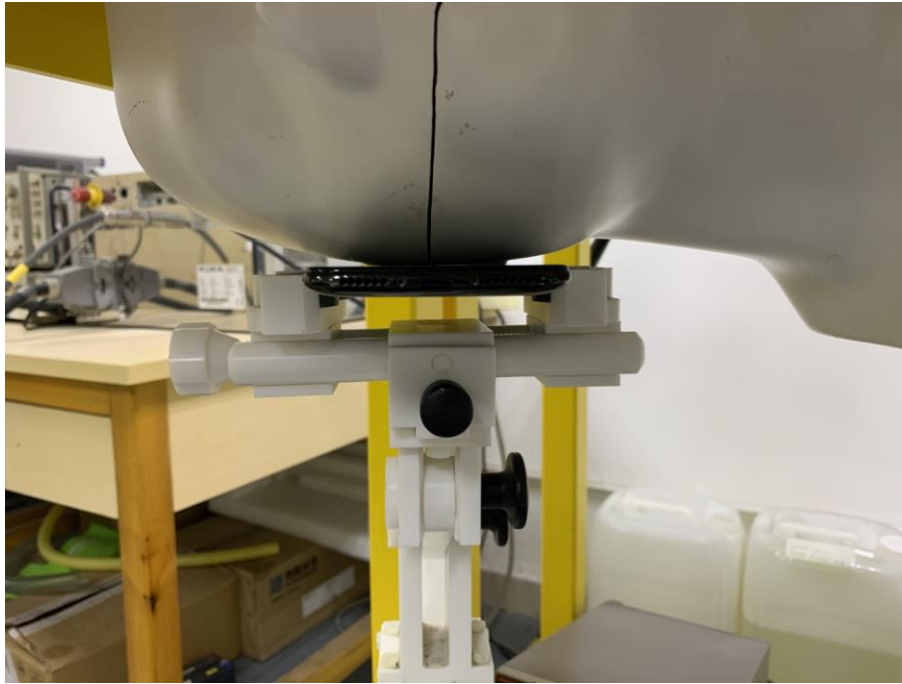

Tilt

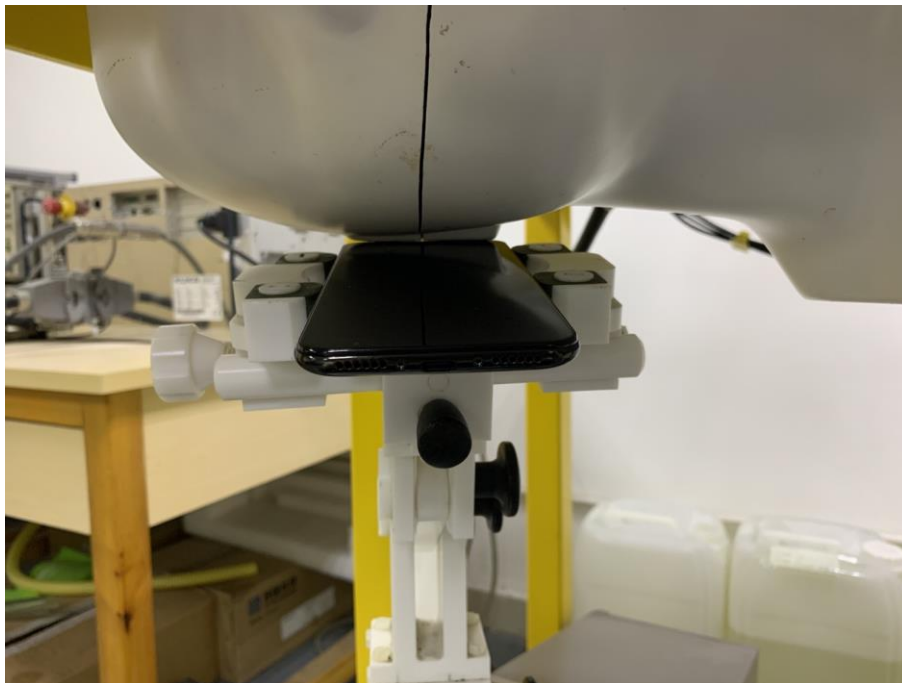

Left Cheek




Tilt



Body mode Exposure Conditions

Test distance: 10mm

Body Front

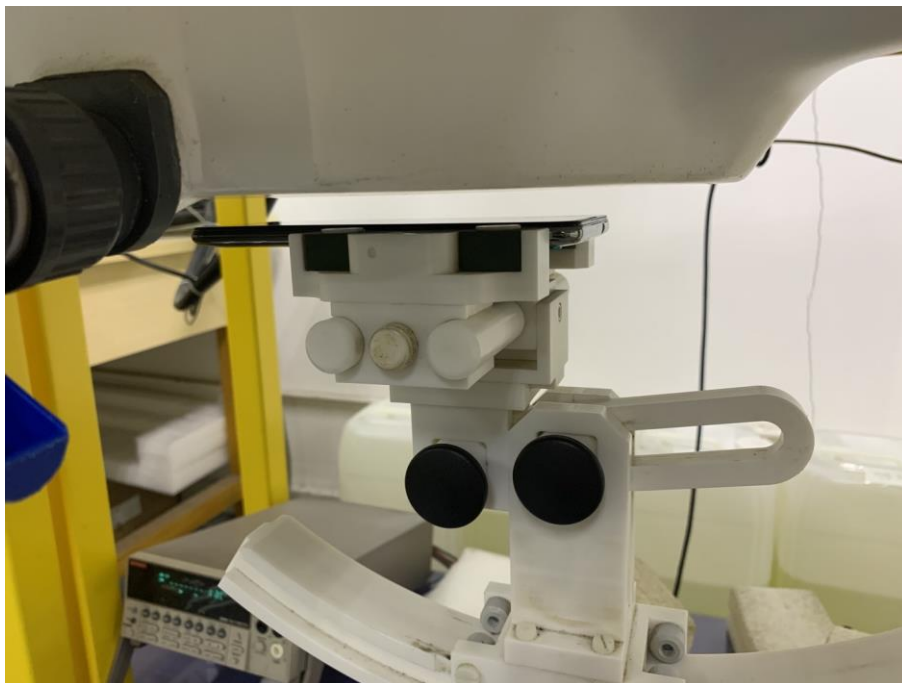


Body Back




Body Right




Body Left

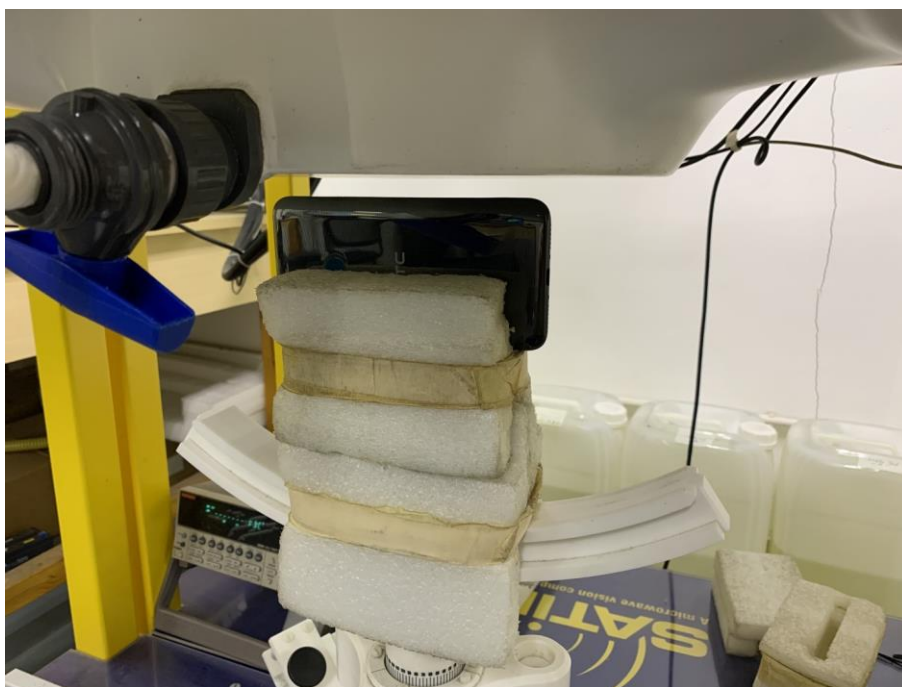

Body Top

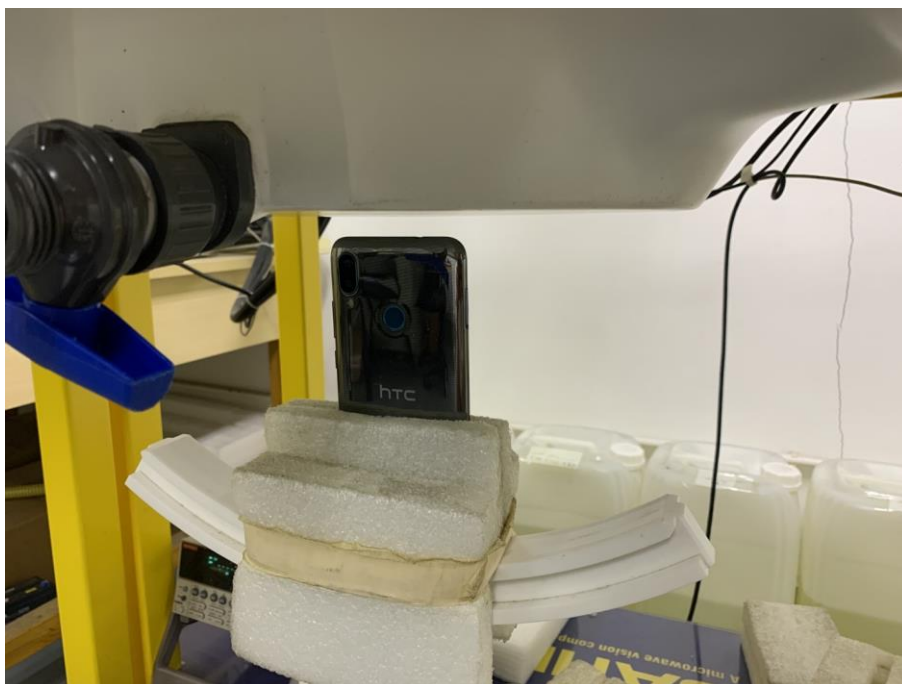

Body Bottom

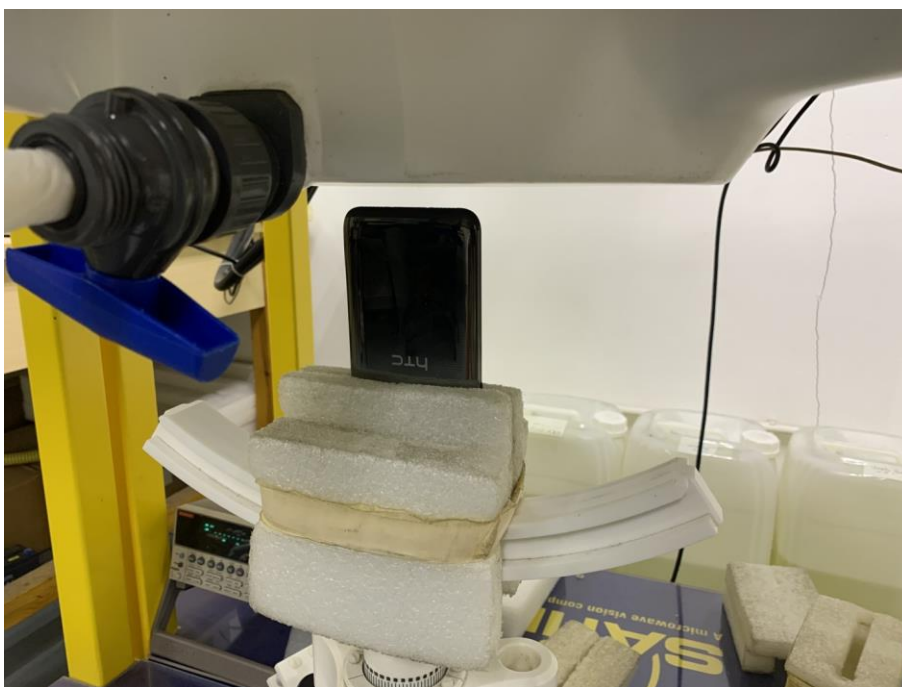

Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******