

3D Antenna Measurement Summary Report

REPORT NO.: OR200430C01 R3

MODEL NAME: FML2.4W45A-160-MHF4L

ANTENNA TYPE: PIFA Antenna

TRADE NAME: Nissei

TESTED DATE: 2020.4.29 ~ 2020.5.19

ISSUED: 2022.11.16

APPLICANT: Hakko Electronics Co., Ltd.

ADDRESS : 890-1, Kamikashiwano-machi, Hakusan-shi, Ishikawa,
924-0035, Japan

ISSUED BY: Bureau Veritas Consumer Products Service (H.K.) Ltd.,
Taoyuan Branch Lin Kou Laboratories.

ADDRESS: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New
Taipei City, Taiwan (R.O.C)

TEST LOCATION: No. 19, Hwa Ya 2nd rd., Kueishan, Taoyuan, Taiwan,
R.O.C.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

RELEASE CONTROL RECORD

REPORT NO.	REASON FOR CHANGE	DATE ISSUED
OR200430C01	Original release	2020.5.11
OR200430C01 R1	Add 5850MHz	2020.5.20
OR200430C01 R2	Add antenna type by Hakko Electronics Co., Ltd.	2022.3.18
OR200430C01 R3	Update antenna type, add Test engineer, Measurement Software information, Test methods and Description of the anechoic chamber	2022.11.16

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
1. Test Methods.....	4
2. Description of the anechoic chamber:	4
3. Test Equipment List.....	5
4. Measurement Uncertainty.....	5
5. Testing Setup Photo.....	6
6. Antenna Radiation Performance.....	6
6.1. Peak Gain	6
6.2. AVG Gain	6
6.3. Efficiency.....	6
7. 3D Antenna Patterns.....	7
APPENDIX. Antenna photograph	16



BUREAU
VERITAS

GENERAL INFORMATION

APPLICANT:	Hakko Electronics Co., Ltd.
MANUFACTURER:	Nissei Limited
MODEL NO.:	FML2.4W45A-160-MHF4L

Test Standard: ANSI/IEEE Std. 149 1979.

TEST BY :

Leo Chen

Leo Chen / Engineer

, DATE :

2022.11.16

PREPARED BY :

Leo Chen

Leo Chen / Engineer

, DATE :

2022.11.16

APPROVED BY :

Johnny Liu

Johnny Liu / Supervisor

, DATE :

2022.11.16

1. Test Methods


The Antenna Gain Test is performed according to The ANSI/IEEE Std 149 12.3.1 Antenna Gain (Small size (< 42cm) Linear Polarization Antennas), using a two-axis support device and one fixed measurement antenna. The EUT is positioned along the required MAPS centerline fixture holder. The EUT is then stepped between 0 and 180 degrees along the theta axis in 15-degree increments. At each theta position, the phi axis is stepped from 0-360 degrees in 15-degree increments. Data is recorded using the Network analyzer for both theta and phi polarizations at each position. Depending on the protocol, an appropriate filter is used in the EMQuest software to process the data. Upon completion of the test, test results (angular dependent EIRP) is calculated at each measurement point and the required value is automatically calculated. This test procedure is repeated for frequency and configuration as required.

2. Description of the anechoic chamber:

Length: 7.32 m

Width: 3.66 m

Height: 3.51 m

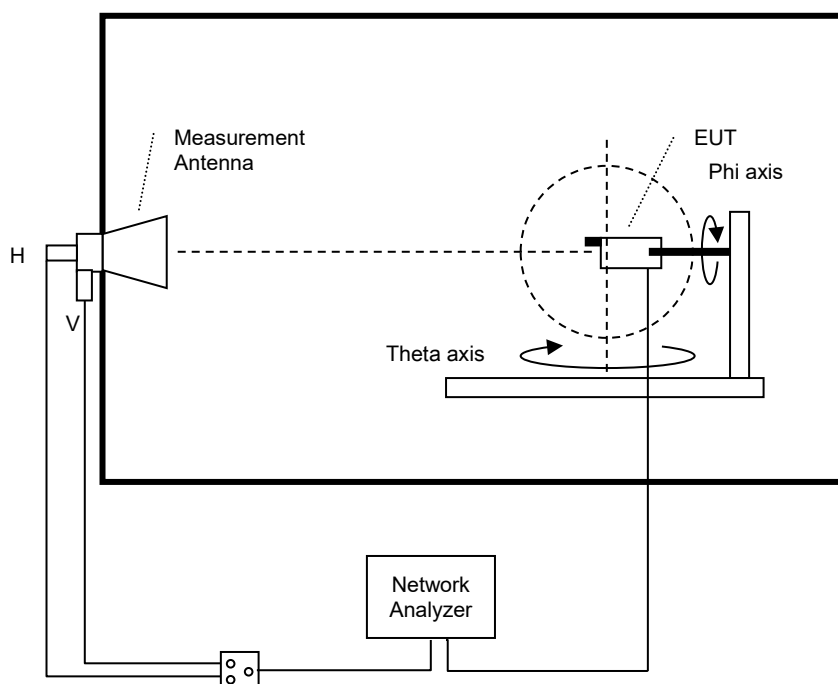

3. Test Equipment List


TYPE OF EQUIPMENT	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DUE DATE
ETS Anechoic Chamber	AMS-8500	N/A	N/A
Measurement Software	ETS Lindgren EMQuest V1.14 build 31654	1153	N/A
Multi-Axis Positioning System	ETS 2090-OPTI	N/A	N/A
Horn Antenna	ETS 3164-06	N/A	N/A
Switch Control	Agilent 3499A	N/A	N/A
Network Analyzer	E5071C	MY46212595	2021/3/3

4. Measurement Uncertainty

Expanded Uncertainty for Measurement (k=2 or 95.45% Confidence Level) at Passive antenna test over frequency range:.

FREQUENCY RANGE	MEASUREMENT UNCERTAINTY
780~2200 MHz	1.57 dB
2200~3000 MHz	1.75 dB
3000~6000 MHz	4.17 dB

5. Testing Setup Photo

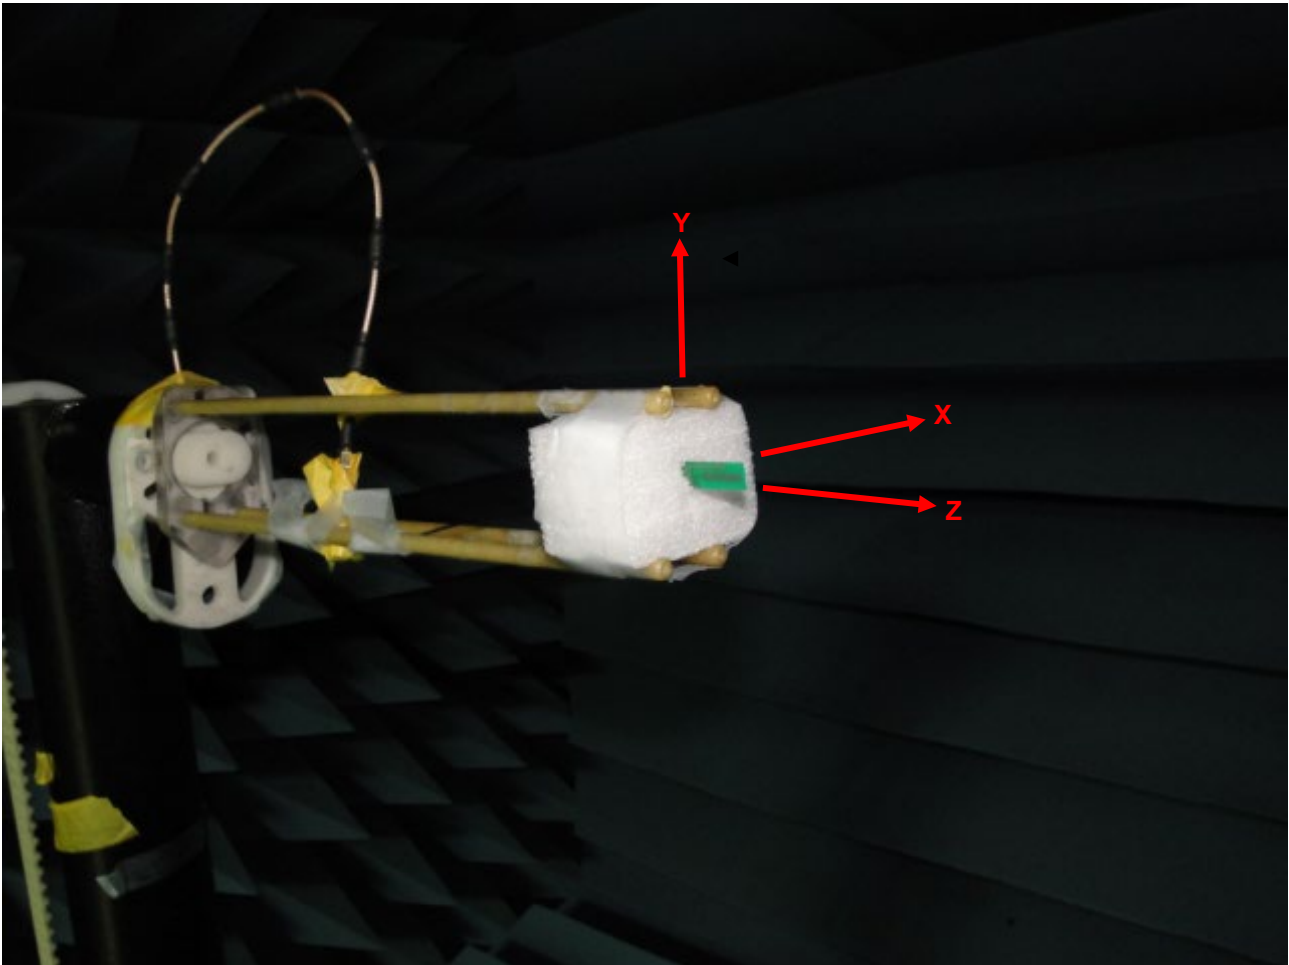

6. Antenna Radiation Performance

6.1. Peak Gain

Frequency (MHz)	2400	2450	2483.5	5150	5350	5470	5725	5825	5850
Peak Gain (dBi)	2.93	3.03	3.13	-0.52	0.26	2.91	4.94	4.45	3.43

6.2. AVG Gain

Frequency (MHz)	2400	2450	2483.5	5150	5350	5470	5725	5825	5850
Average Gain (dBi)	-2.75	-2.52	-2.26	-4.11	-3.53	-3.40	-2.59	-3.00	-4.34


6.3. Efficiency

Frequency (MHz)	2400	2450	2483.5	5150	5350	5470	5725	5825	5850
Efficiency (%)	53.05	55.98	59.50	38.85	44.35	45.66	55.12	50.07	36.85


7. 3D Antenna Patterns

2400MHz


Total

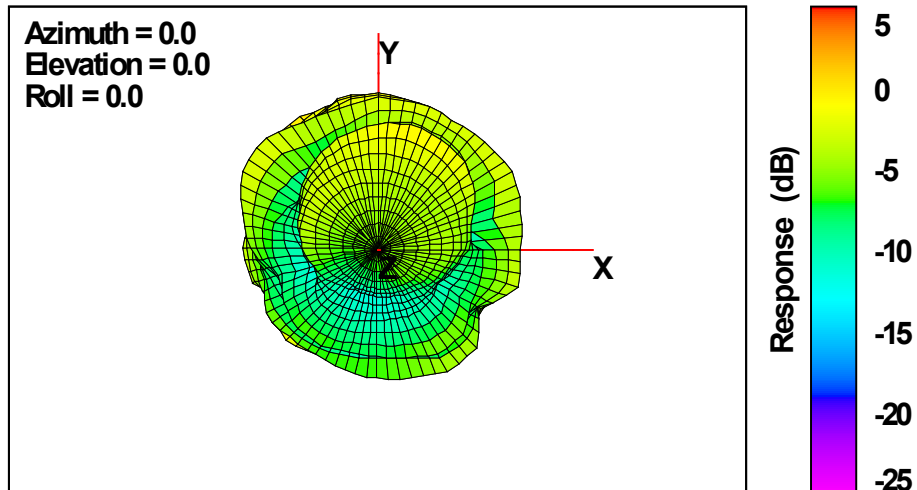

Total

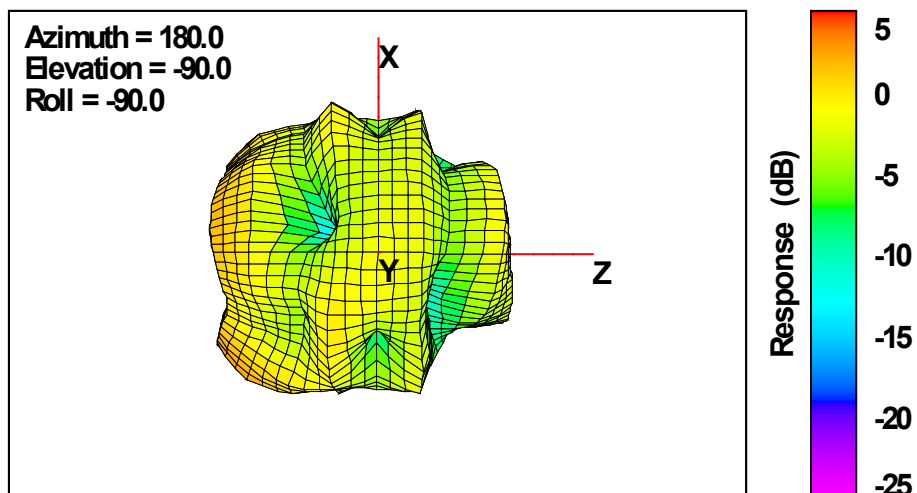



Total

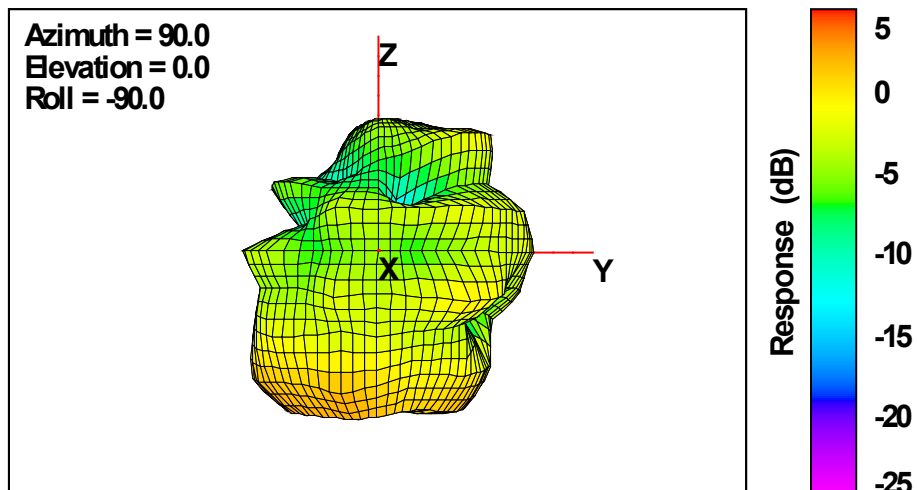

2450MHz



Total

Azimuth = 0.0
Elevation = 0.0
Roll = 0.0

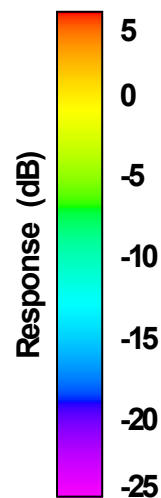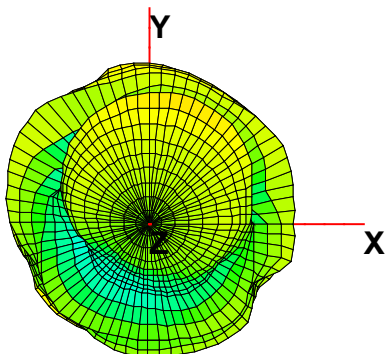



Total

Azimuth = 180.0
Elevation = -90.0
Roll = -90.0

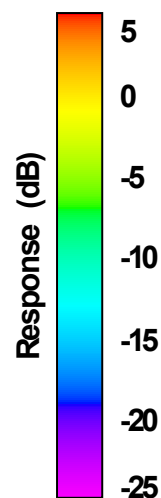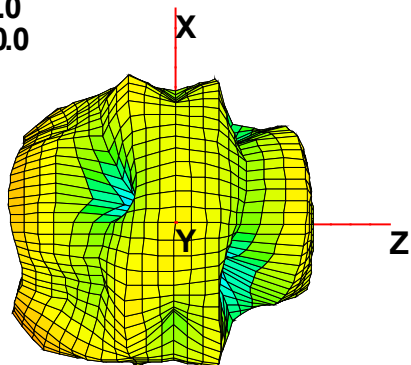

Total



Azimuth = 90.0
Elevation = 0.0
Roll = -90.0

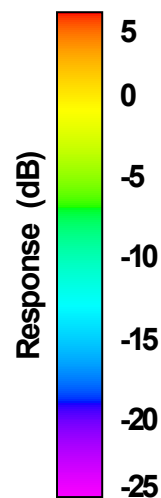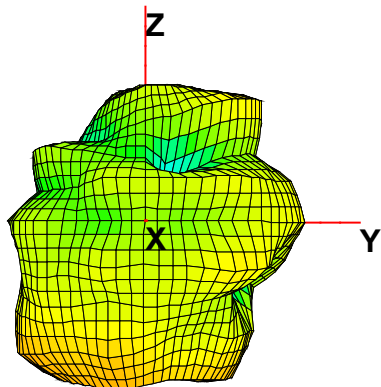

2483.5MHz



Total

Azimuth = 0.0
Elevation = 0.0
Roll = 0.0

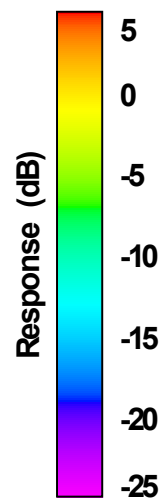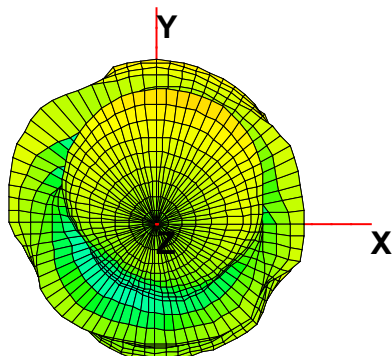



Total

Azimuth = 180.0
Elevation = -90.0
Roll = -90.0

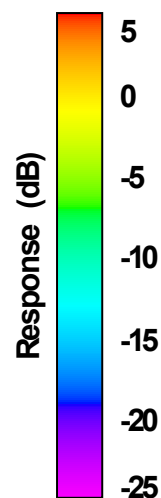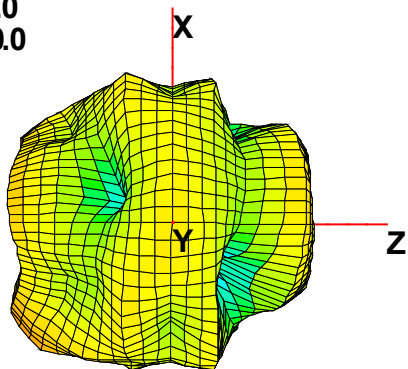

Total



Azimuth = 90.0
Elevation = 0.0
Roll = -90.0

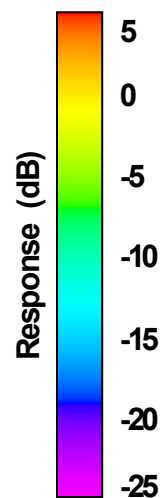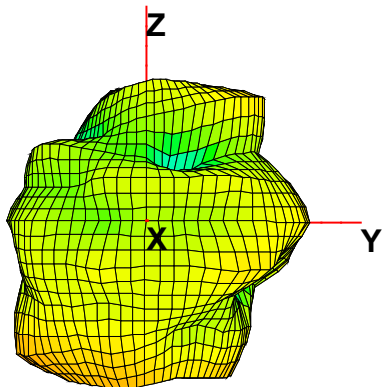

5150MHz



Total

Azimuth = 0.0
Elevation = 0.0
Roll = 0.0

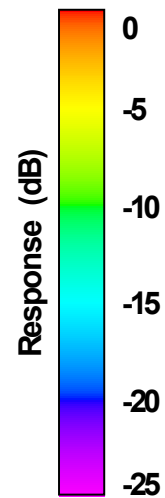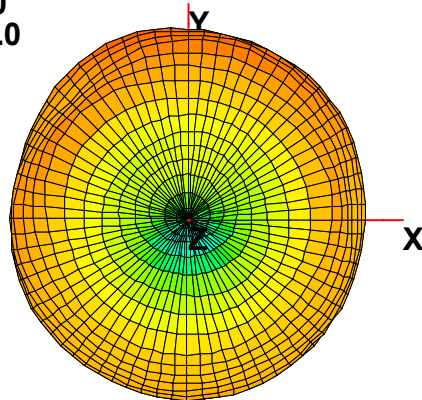



Total

Azimuth = 180.0
Elevation = -90.0
Roll = -90.0

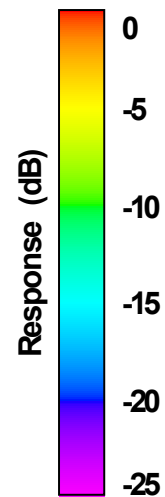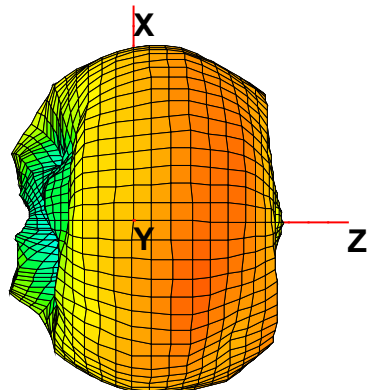

Total



Azimuth = 90.0
Elevation = 0.0
Roll = -90.0

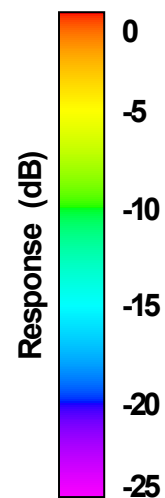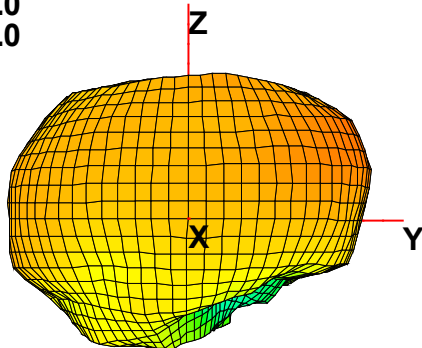

5350MHz



Total

Azimuth = 0.0
Elevation = 0.0
Roll = 0.0

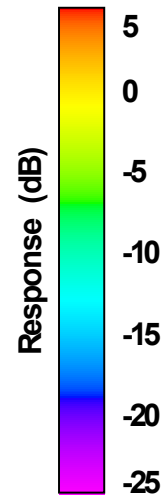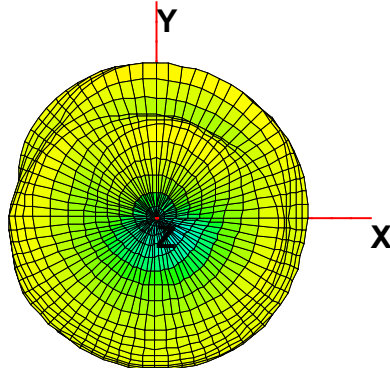



Total

Azimuth = 180.0
Elevation = -90.0
Roll = -90.0

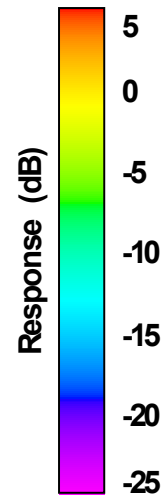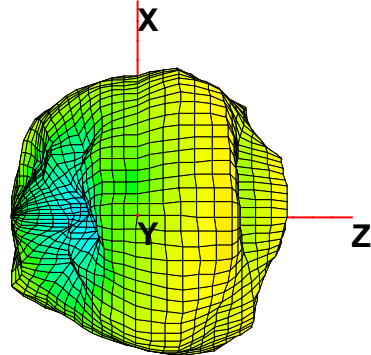

Total



Azimuth = 90.0
Elevation = 0.0
Roll = -90.0

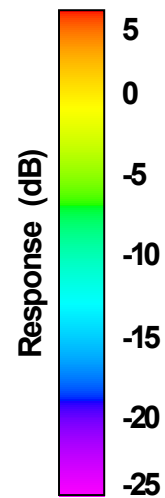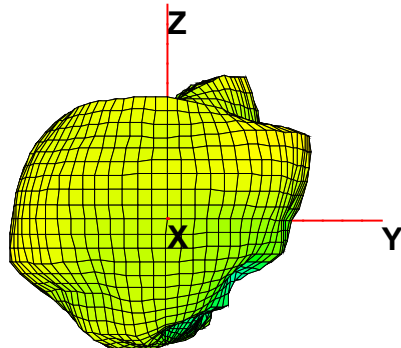

5470MHz



Total

Azimuth = 0.0
Elevation = 0.0
Roll = 0.0

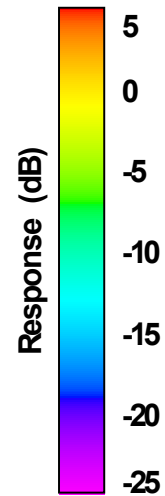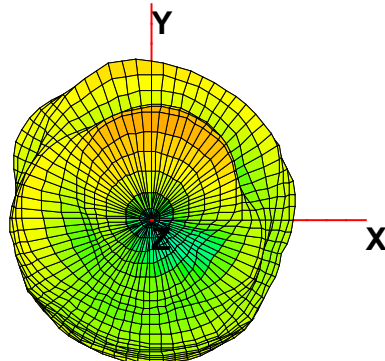



Total

Azimuth = 180.0
Elevation = -90.0
Roll = -90.0

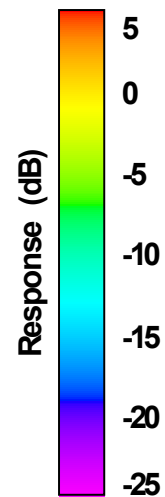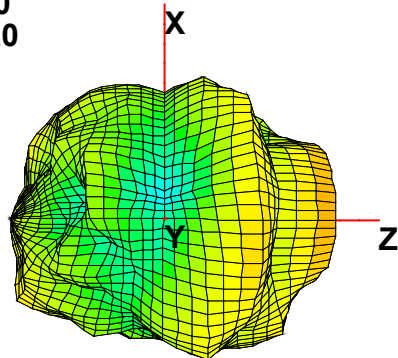

Total



Azimuth = 90.0
Elevation = 0.0
Roll = -90.0

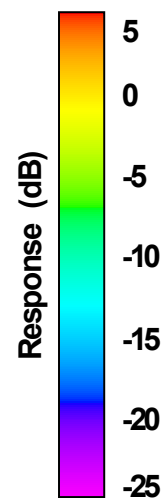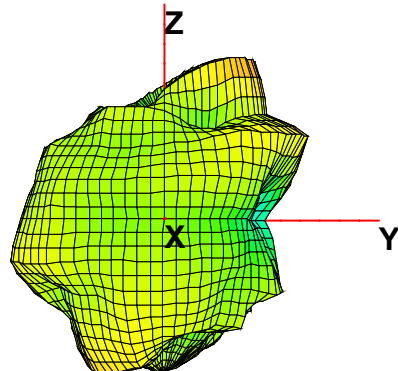

5725MHz



Total

Azimuth = 0.0
Elevation = 0.0
Roll = 0.0

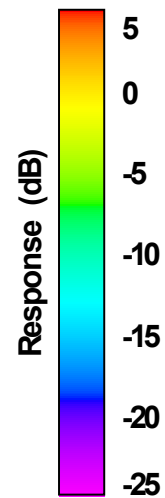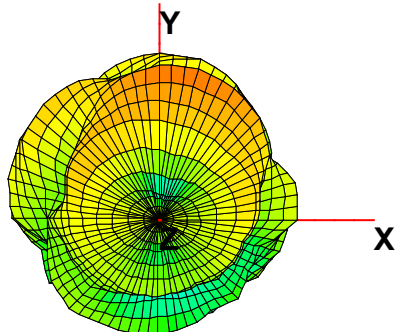



Total

Azimuth = 90.0
Elevation = 0.0
Roll = -90.0

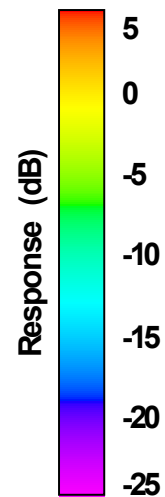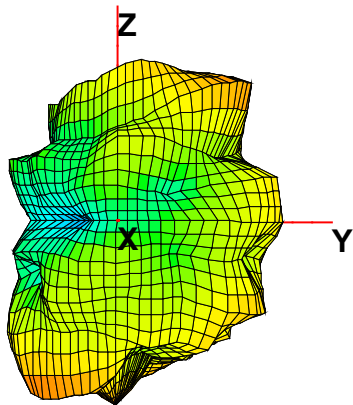

Total



Azimuth = 180.0
Elevation = -90.0
Roll = -90.0

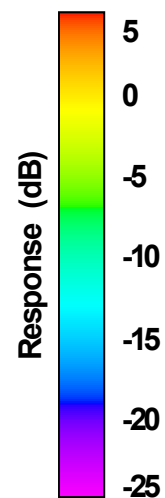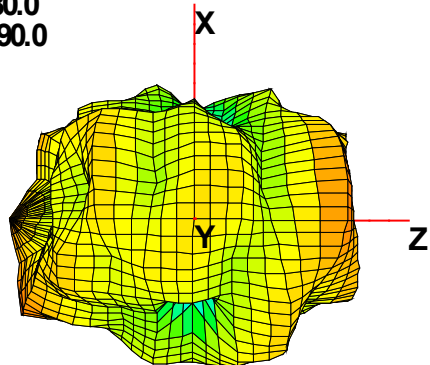

5825MHz



Total

Azimuth = 0.0
Elevation = 0.0
Roll = 0.0

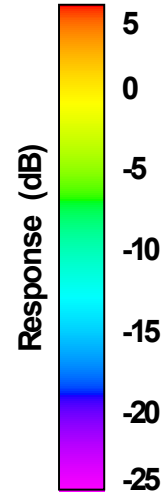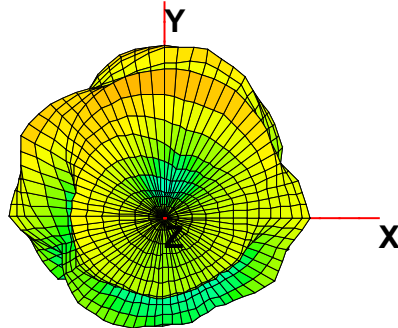



Total

Azimuth = 180.0
Elevation = -90.0
Roll = -90.0

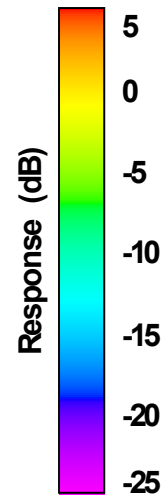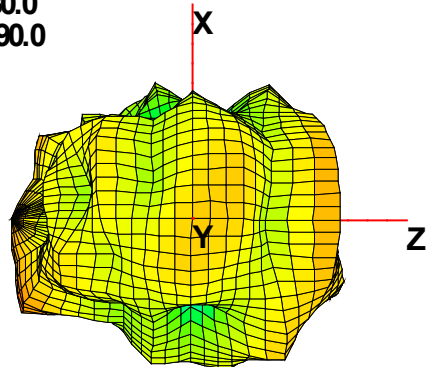

Total



Azimuth = 90.0
Elevation = 0.0
Roll = -90.0

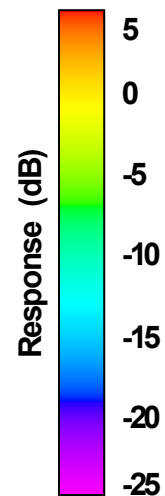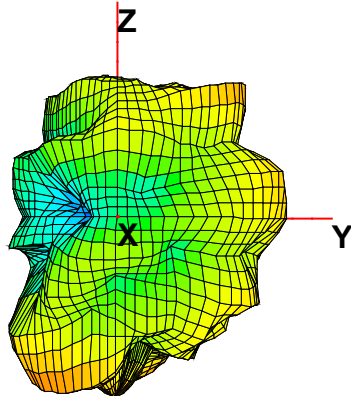

5850MHz



Total

Azimuth = 0.0
Elevation = 0.0
Roll = 0.0

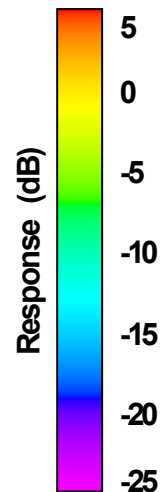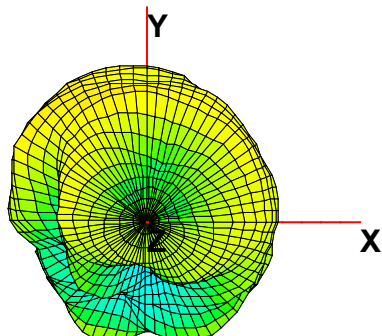



Total

Azimuth = 180.0
Elevation = -90.0
Roll = -90.0

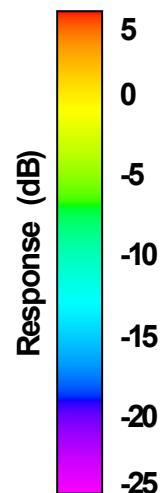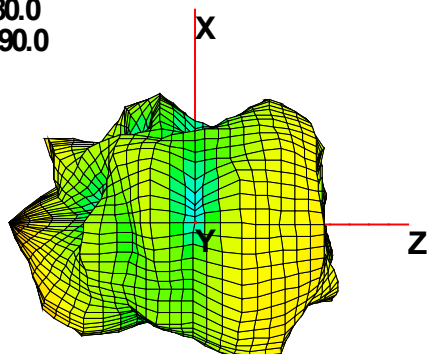


Total

Azimuth = 90.0
Elevation = 0.0
Roll = -90.0

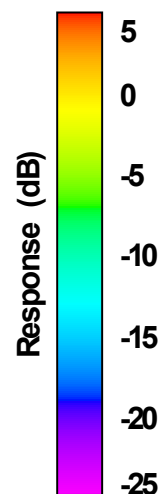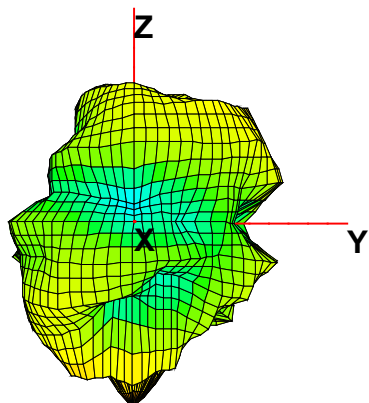

APPENDIX. Antenna photograph

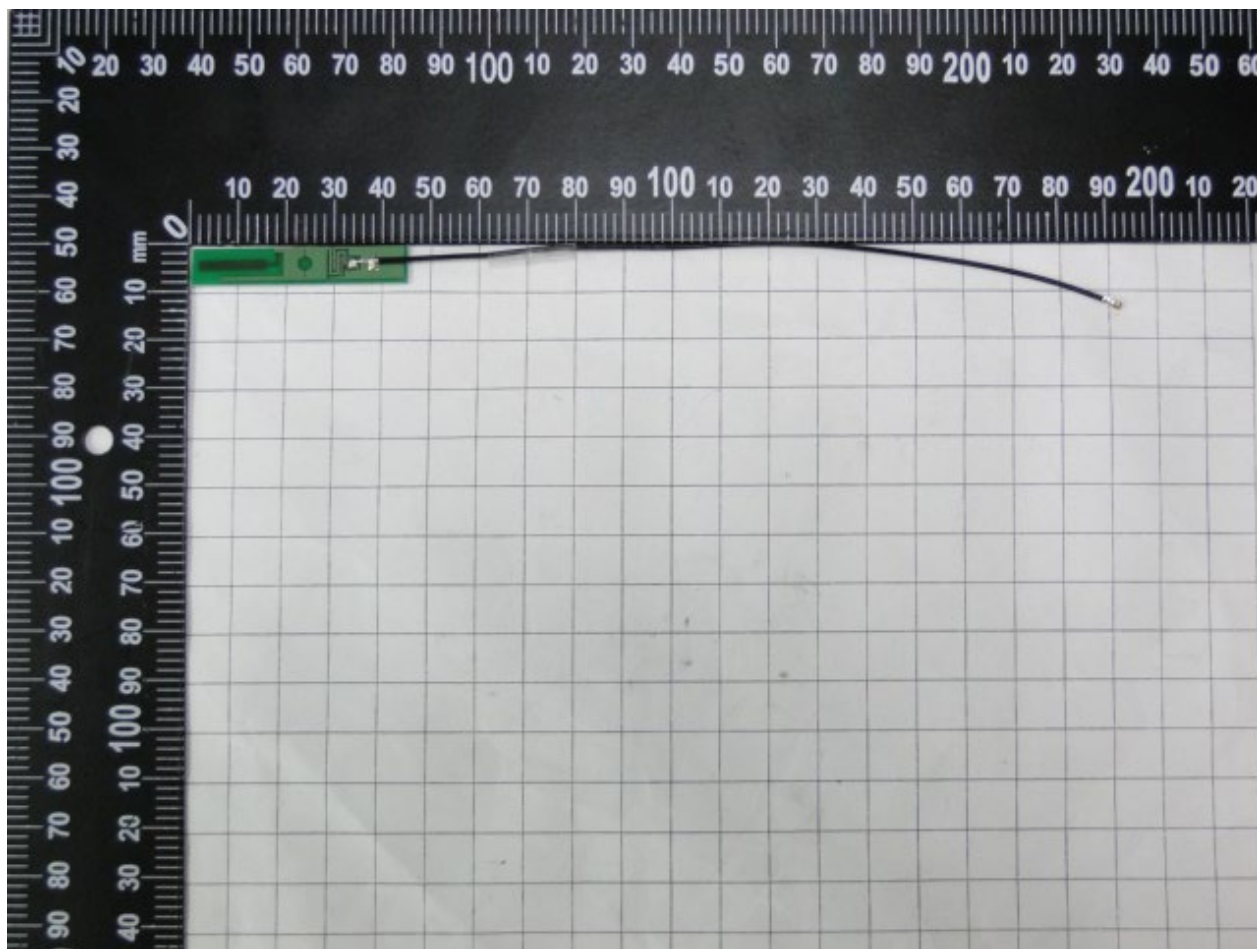

Antenna