



Test Report

AIR-CAP702W-A-K9

FCC ID: LDK102092
IC:2461B-102092

Also Covers:

AIR-CAP702W-T-K9

AIR-CAP702W-N-K9

AIR-CAP702W-Z-K9

5725-5850 MHz

Against the following Specifications:

CFR47 Part 15.247

RSS210

Cisco Systems

170 West Tasman Drive
San Jose, CA 95134

A handwritten signature in blue ink, appearing to read "Jim Hildebrand".

Test Engineer: _____

Date: 11/27/2013



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW	3
1.1 TEST SUMMARY.....	3
SECTION 2: ASSESSMENT INFORMATION	4
2.1 GENERAL	4
2.2 DATE OF TESTING	5
08-OCTOBER-2013	5
2.3 REPORT ISSUE DATE	5
2.4 TESTING FACILITIES.....	5
JIM NICHOLSON	5
2.5 EQUIPMENT ASSESSED (EUT)	5
2.6 EUT DESCRIPTION.....	6
SECTION 4: SAMPLE DETAILS	7
APPENDIX A: EMISSION TEST RESULTS.....	8
TARGET MAXIMUM CHANNEL POWER	8
6DB BANDWIDTH9	
99% AND 26dB BANDWIDTH.....	16
PEAK OUTPUT POWER	23
POWER SPECTRAL DENSITY	48
CONDUCTED SPURIOUS EMISSION	55
APPENDIX B: EMISSION TEST RESULTS.....	111
RADIATED SPURIOUS EMISSIONS.....	111
MAXIMUM PERMISSIBLE EXPOSURE (MPE) CALCULATIONS.....	116
APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST	118

Section 1: Overview

1.1 Test Summary

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Emission	Immunity
CFR47 Part 15.247 RSS210	N/A

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V- 3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)
220V 50 Hz (+/-20%)

This report must not be reproduced except in full, without written approval of Cisco Systems.



2.2 Date of testing

08-October-2013

2.3 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,	Cisco Systems, Inc.
4125 Highlander Parkway	170 West Tasman Drive
Richfield, OH 44286	San Jose, CA 95134
USA	USA

Test Engineers

Jim Nicholson

2.5 Equipment Assessed (EUT)

AIR-CAP702W-A-K9



2.6 EUT Description

The AIR-CAP702W-A-K9 Cisco Aironet 802.11n Radio Modules support the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

Non HT-20, One Antenna, 6 to 54 Mbps
Non HT-20, Two Antennas, 6 to 54 Mbps

Non HT-20 Beam Forming, Two Antennas, 6 to 54 Mbps

HT-20, One Antenna, M0 to M7
HT-20, Two Antennas, M0 to M15

HT-20 Beam Forming, Two Antennas, M0 to M15

HT-20 STBC, Two Antennas, M0 to M7

Non HT-40 Duplicate, One Antenna, 6 to 54 Mbps
Non HT-40 Duplicate, Two Antennas, 6 to 54 Mbps

HT-40, One Antenna, M0 to M7
HT-40, Two Antennas, M0 to M15

HT-40 Beam Forming, Two Antennas, M0 to M15

HT-40 STBC, Two Antennas, M0 to M7

The following antennas are supported by this product series.
The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)
2.4/5 GHz	Internal	Omni-Directional	2 / 4



Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the "Justification for worst Case test Configuration" section of this report for further details on the selection of EUT samples.

4.1 Sample Details (Photographs of the test samples, where appropriate can be found in appendix H)

Sample No.	Equipment Details	Part Number	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-CAP702W-A-K9		Cisco Systems	NA	NA	NA	
S02	AIR-PWRINJ5	341-0556-01					

4.2 System Details

System #	Description	Samples
1	EUT	S01, S02, S03

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting

**Appendix A: Emission Test Results****Testing Laboratory:** Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA**Target Maximum Channel Power**

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)		
	Frequency (MHz)		
	5745	5785	5825
Non HT-20, 6 to 54 Mbps	21	20	20
Non HT-20 Beam Forming, 6 to 54 Mbps	21	20	20
HT-20, M0 to M15	20	20	19
HT-20 Beam Forming, M0 to M15	20	20	19
HT-20 STBC, M0 to M7	20	20	19
	5755	5795	
Non HT-40, 6 to 54 Mbps	21	21	
HT-40, M0 to M15	20	20	
HT-40 Beam Forming, M0 to M15	20	20	
HT-40 STBC, M0 to M7	20	20	



6dB Bandwidth

15.247: Systems using digital modulation techniques may operate in the 5745-5825 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.

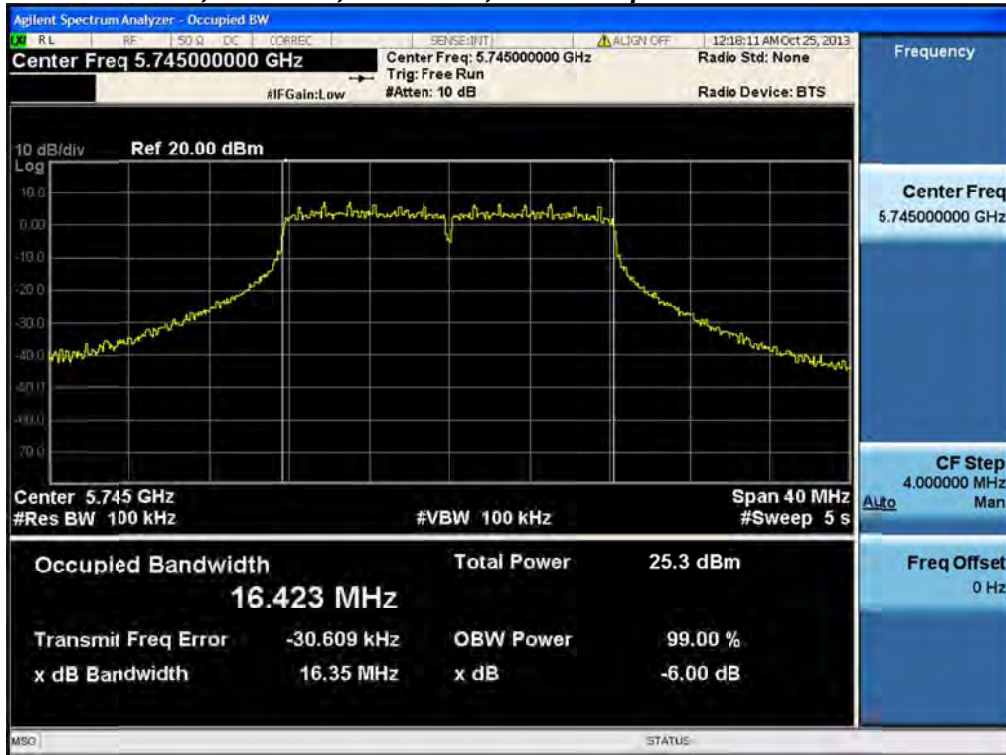
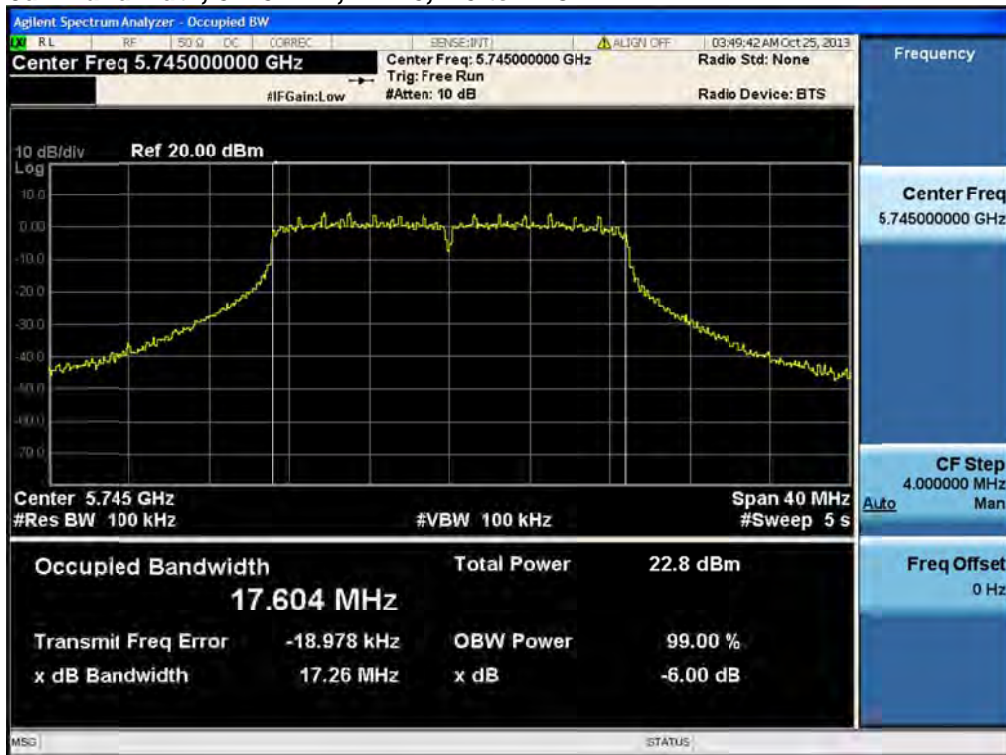
Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

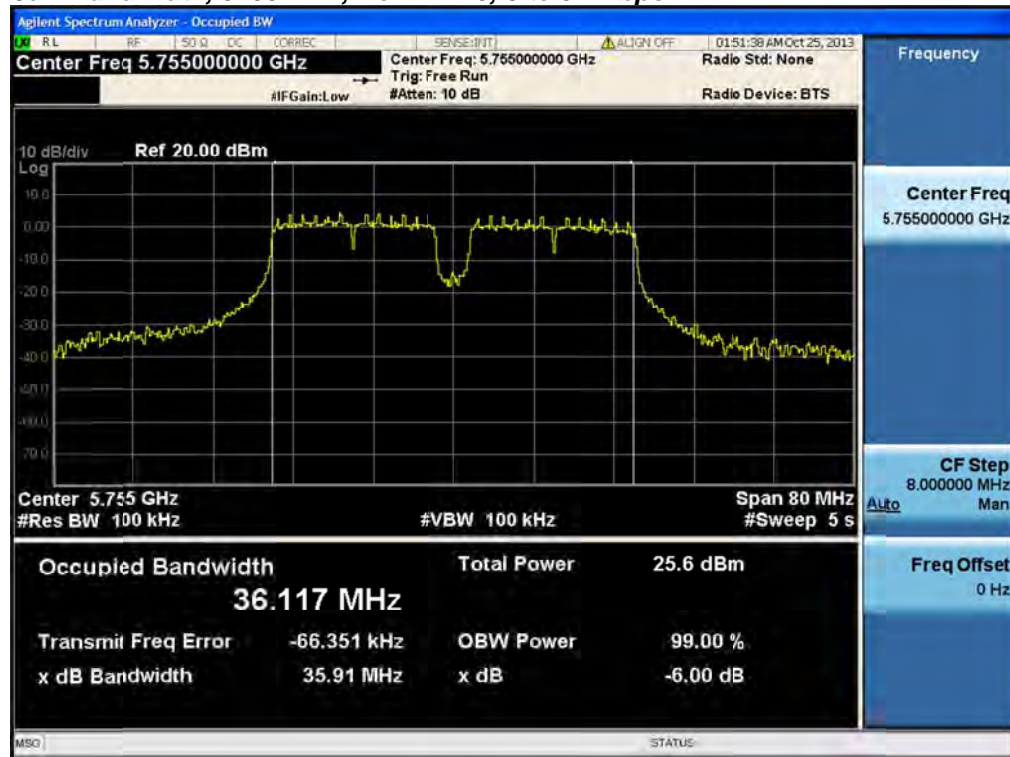
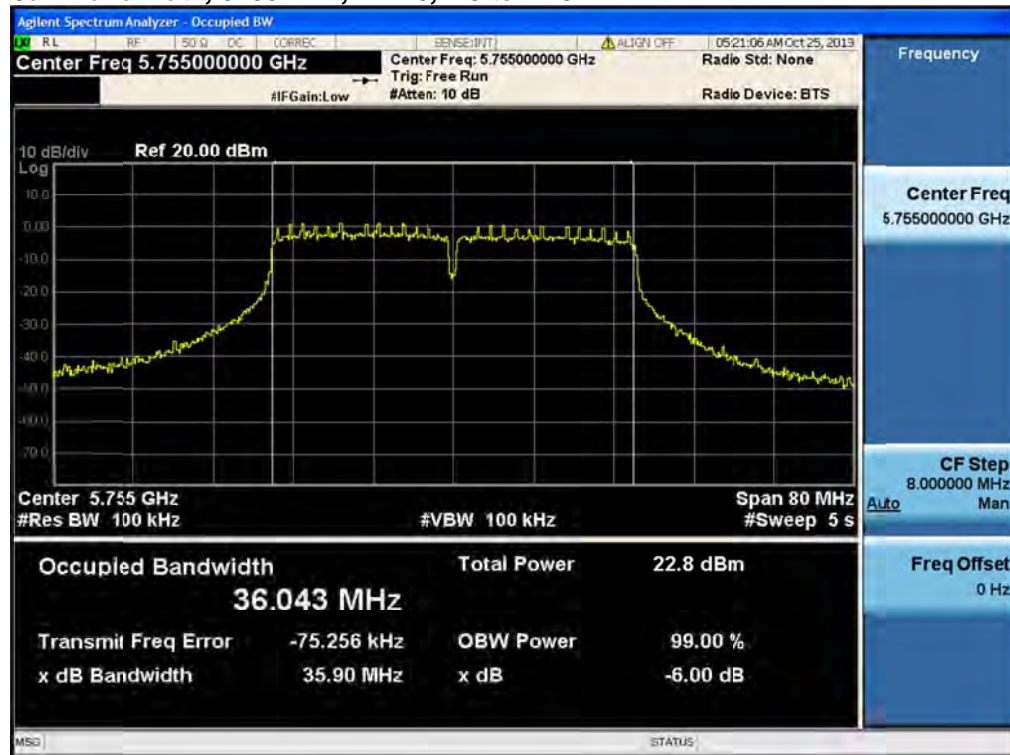
Center Frequency:	Frequency from table below
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	100 kHz
X dB Bandwidth:	6 dB
Detector:	Peak
Trace:	Single

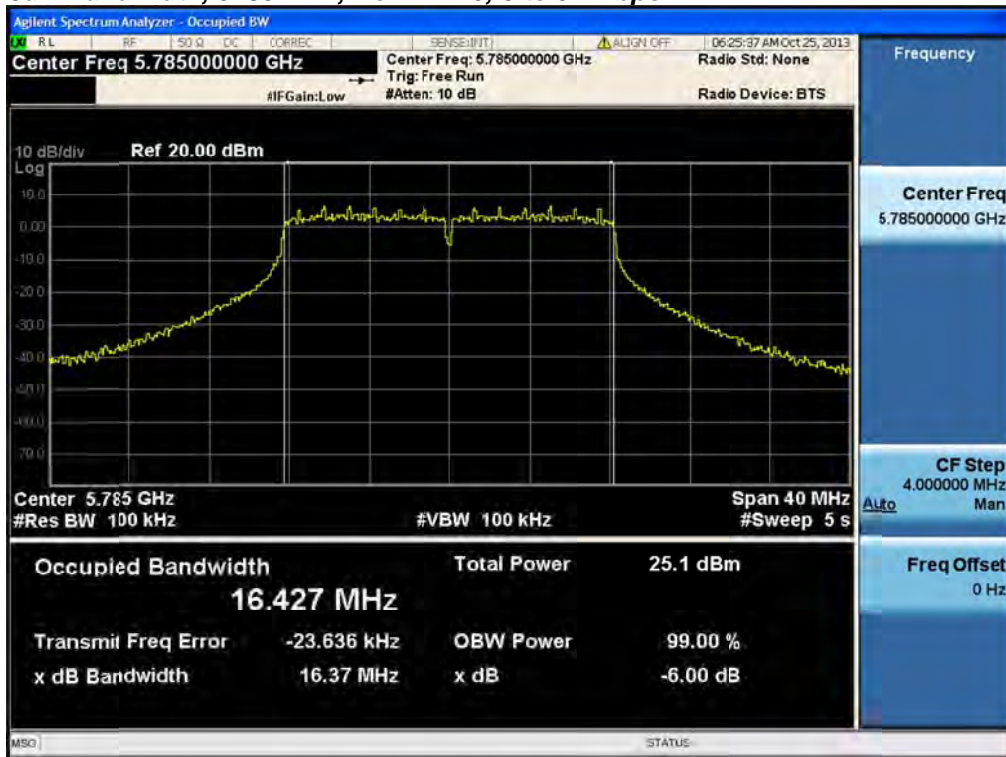
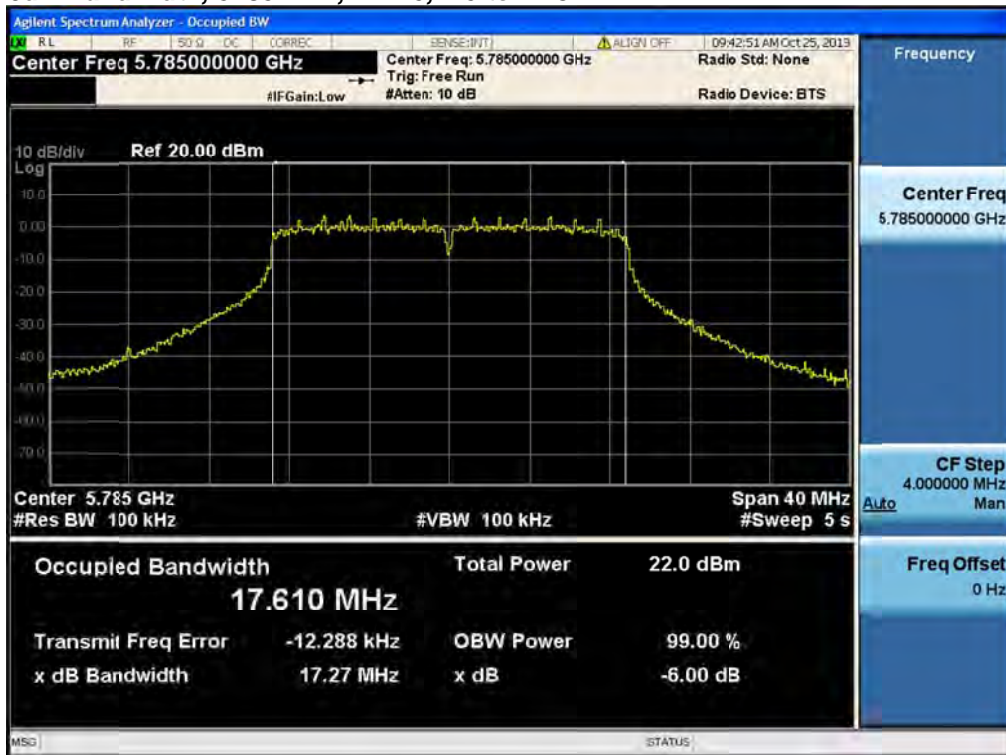
Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:

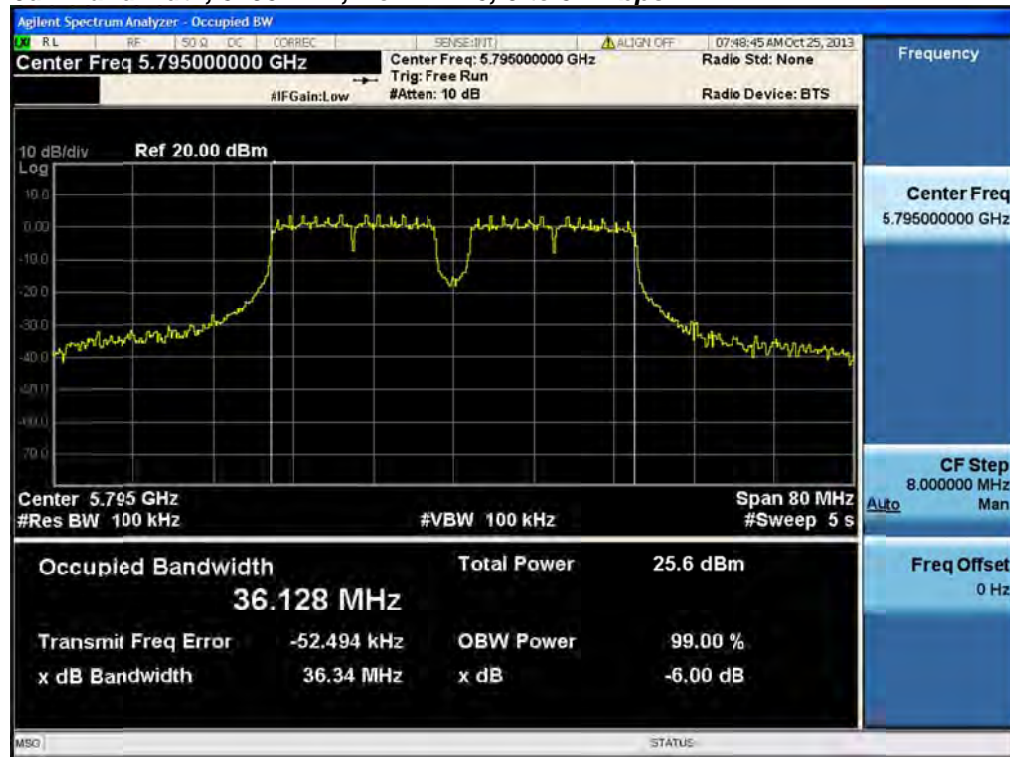
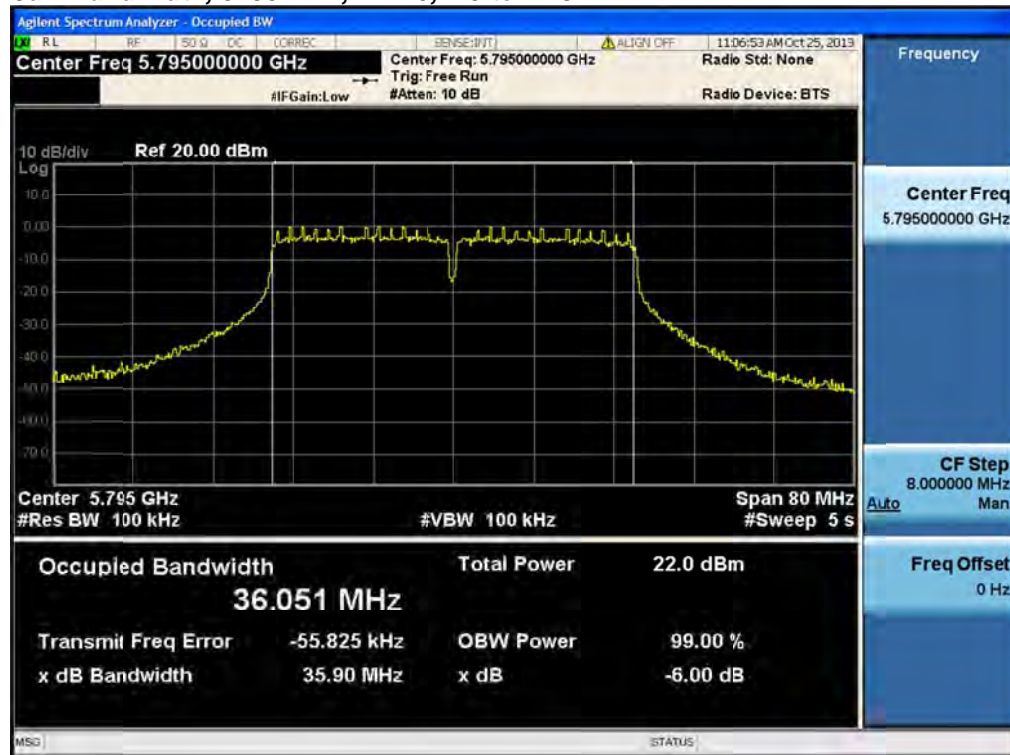


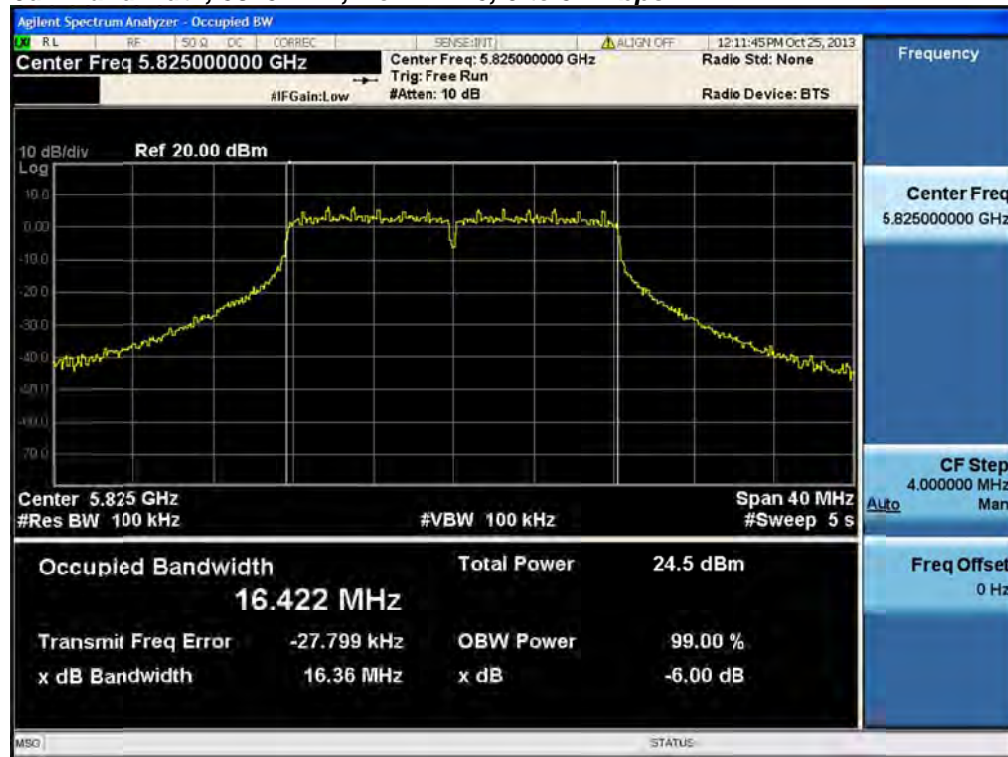
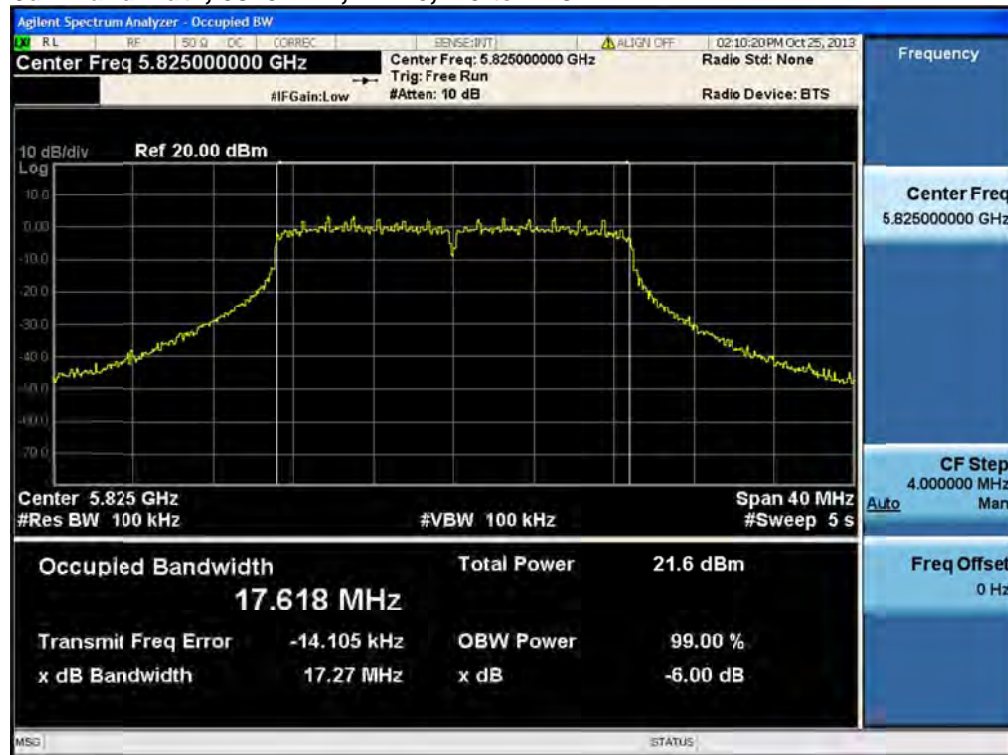
Frequency (MHz)	Mode	Data Rate (Mbps)	6dB BW (MHz)	Limit (kHz)	Margin (MHz)
5745	Non HT-20, 6 to 54 Mbps	6	16.3	>500	15.8
	HT-20, M0 to M23	m0	17.3	>500	16.8
5755	Non HT-40, 6 to 54 Mbps	6	35.9	>500	35.4
	HT-40, M0 to M23	m0	35.9	>500	35.4
5785	Non HT-20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT-20, M0 to M23	m0	17.3	>500	16.8
5795	Non HT-40, 6 to 54 Mbps	6	36.3	>500	35.8
	HT-40, M0 to M23	m0	35.9	>500	35.4
5825	Non HT-20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT-20, M0 to M23	m0	17.3	>500	16.8

6dB Bandwidth, 5745 MHz, Non HT-20, 6 to 54 Mbps**6dB Bandwidth, 5745 MHz, HT-20, M0 to M23**

6dB Bandwidth, 5755 MHz, Non HT-40, 6 to 54 Mbps**6dB Bandwidth, 5755 MHz, HT-40, M0 to M23**

6dB Bandwidth, 5785 MHz, Non HT-20, 6 to 54 Mbps**6dB Bandwidth, 5785 MHz, HT-20, M0 to M23**

6dB Bandwidth, 5795 MHz, Non HT-40, 6 to 54 Mbps**6dB Bandwidth, 5795 MHz, HT-40, M0 to M23**

6dB Bandwidth, 5825 MHz, Non HT-20, 6 to 54 Mbps**6dB Bandwidth, 5825 MHz, HT-20, M0 to M23**



99% and 26dB Bandwidth

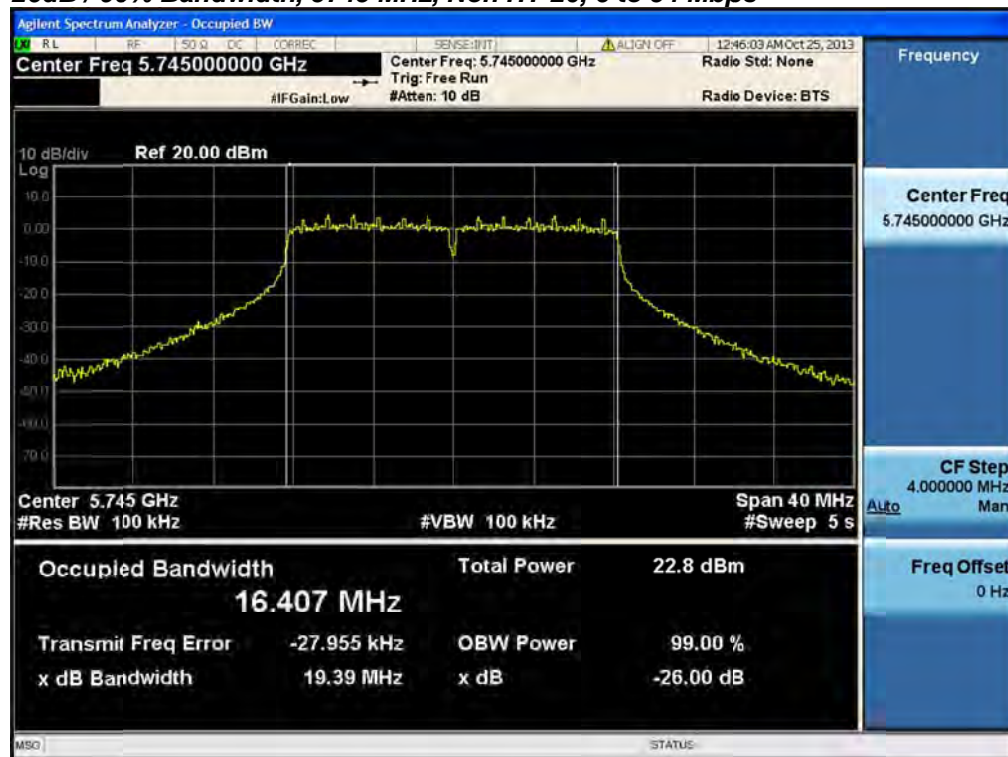
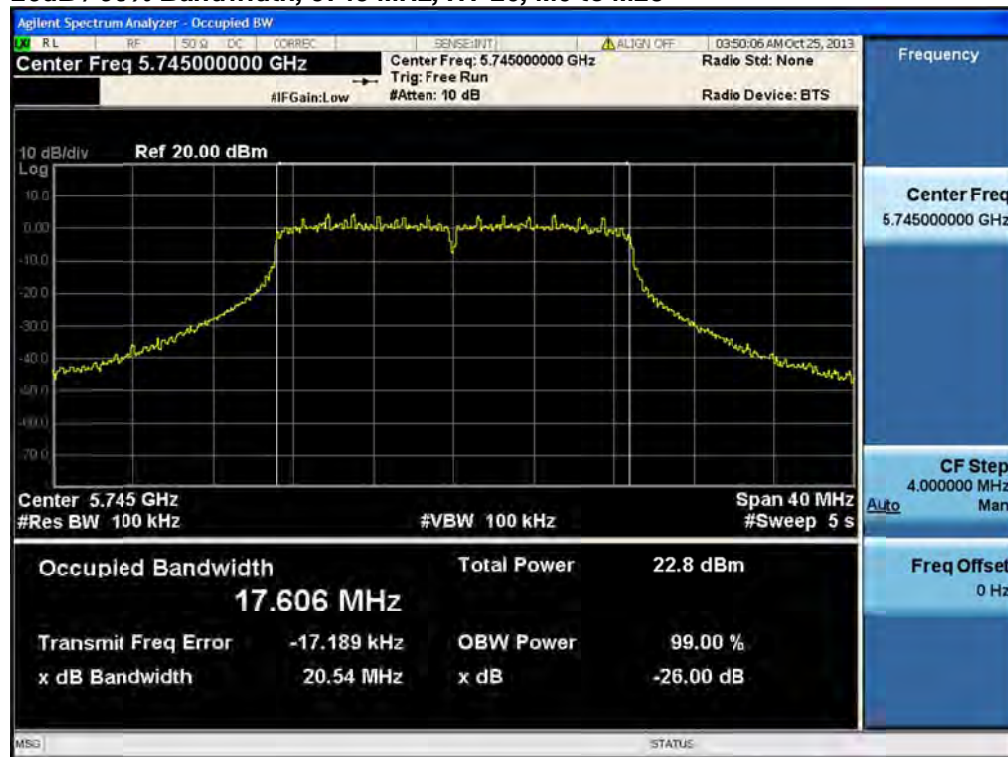
Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

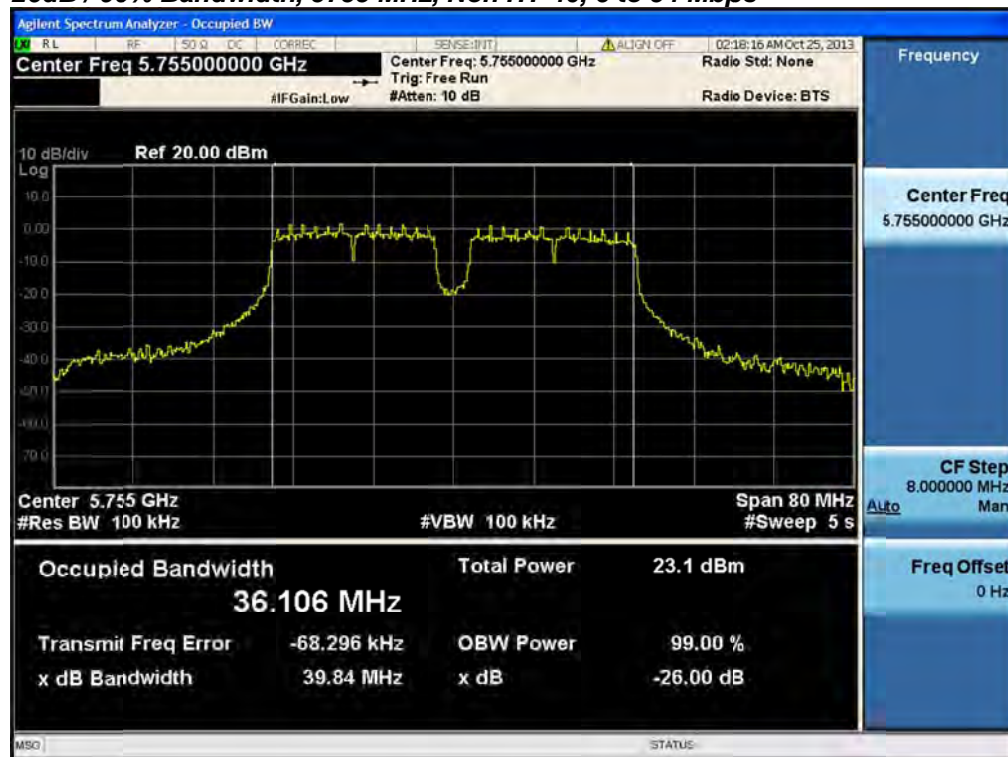
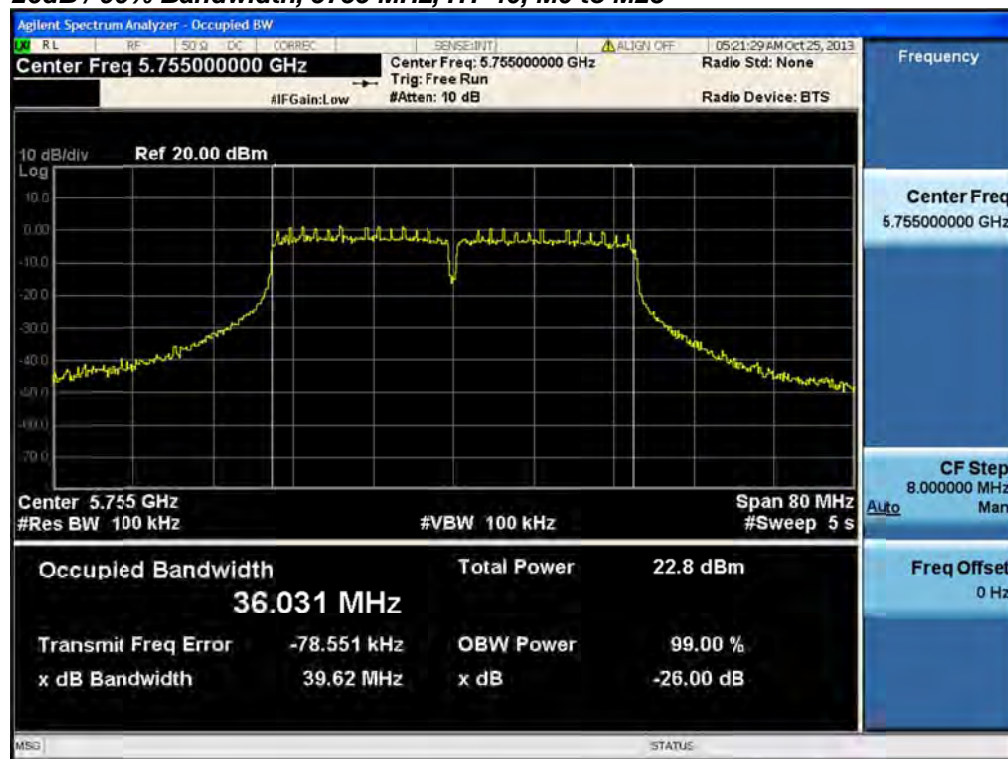
Center Frequency:	Frequency from table below
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	1%-3% of 26 dB Bandwidth
Video Bandwidth:	≥Resolution Bandwidth
X dB Bandwidth:	26 dB
Detector:	Peak
Trace:	Single

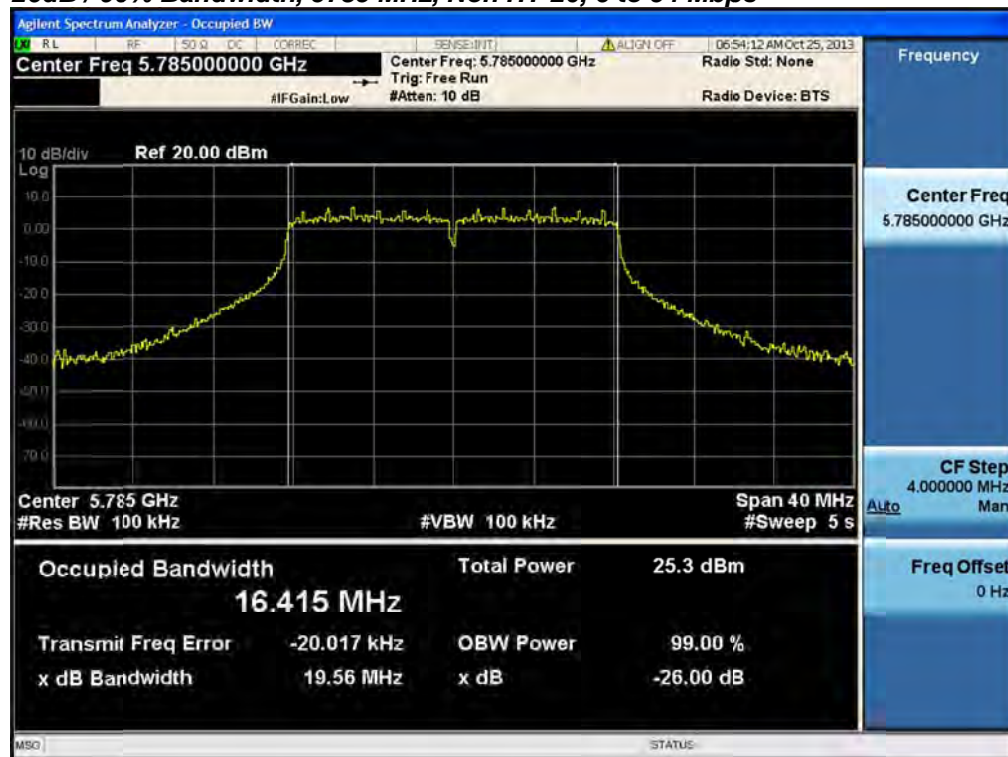
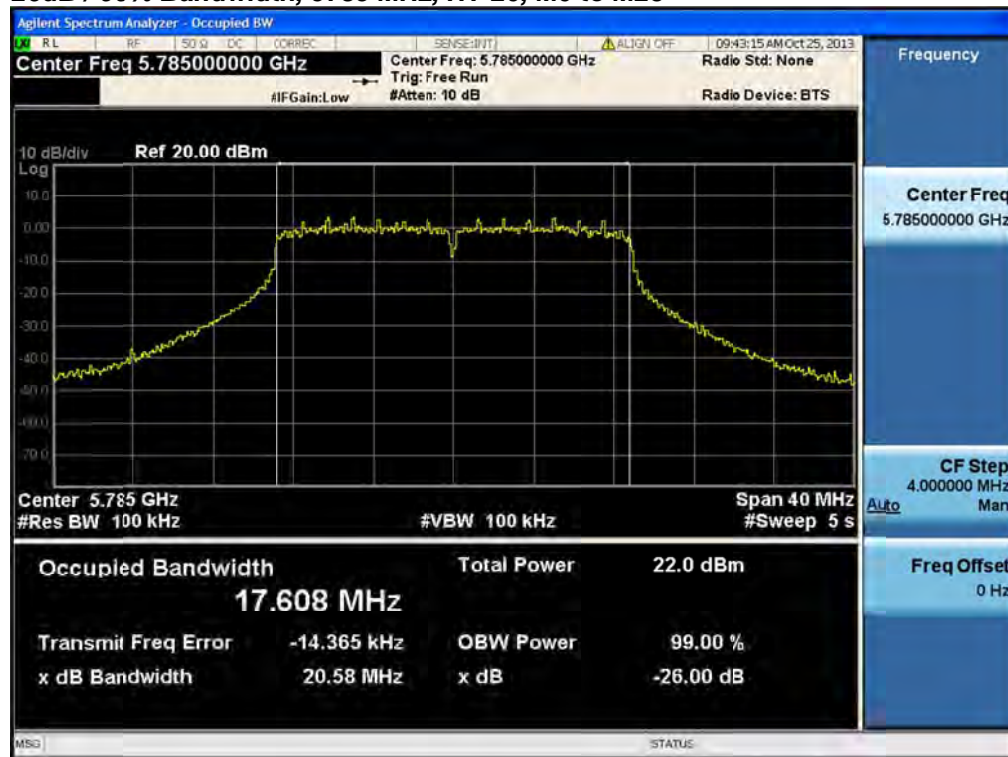
Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:

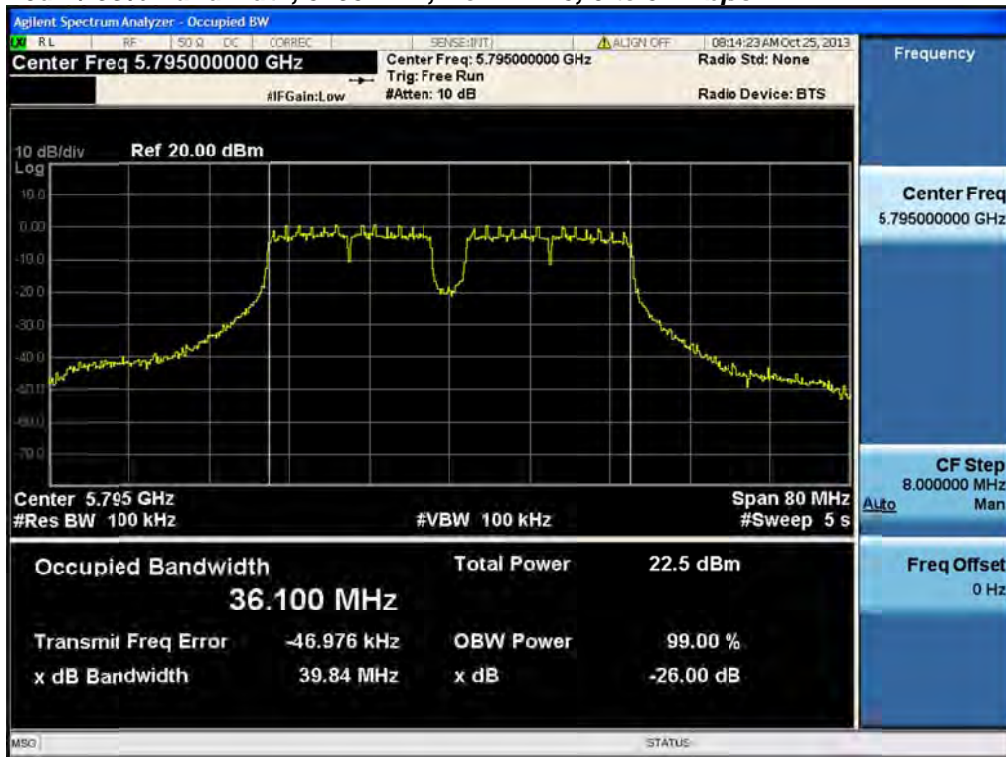
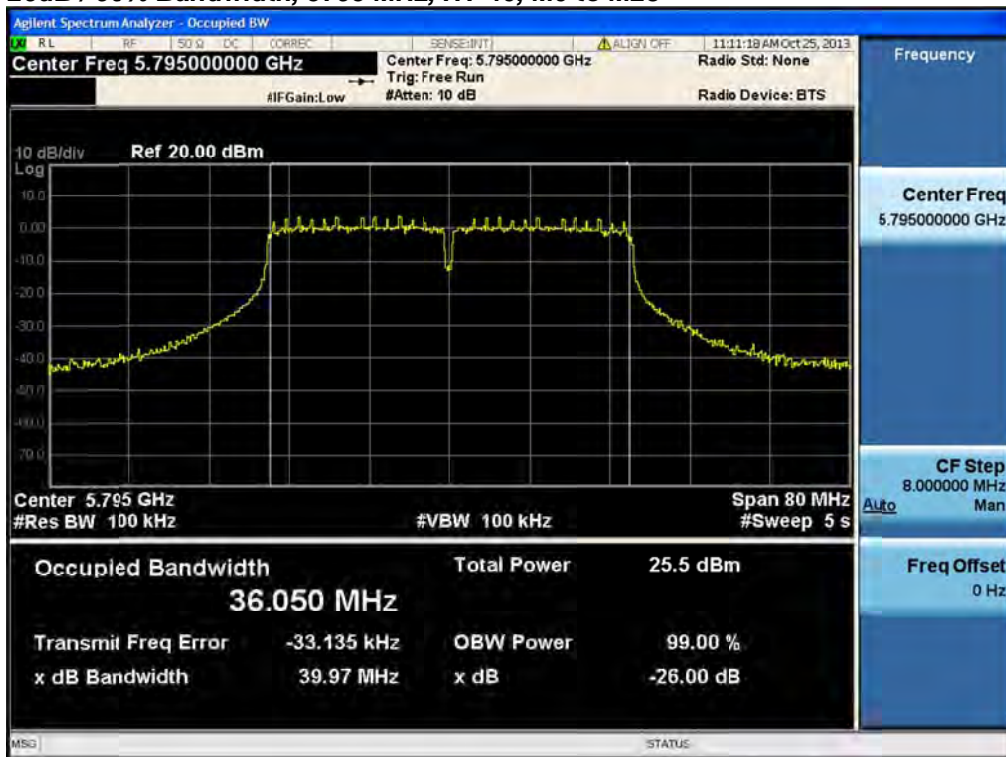


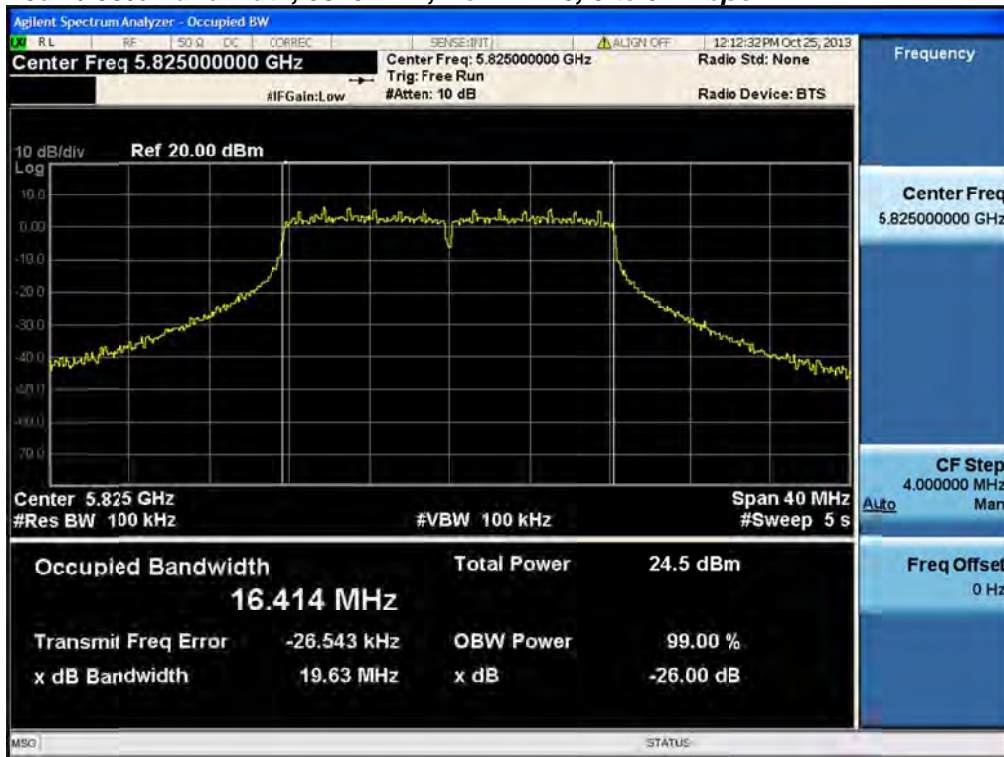
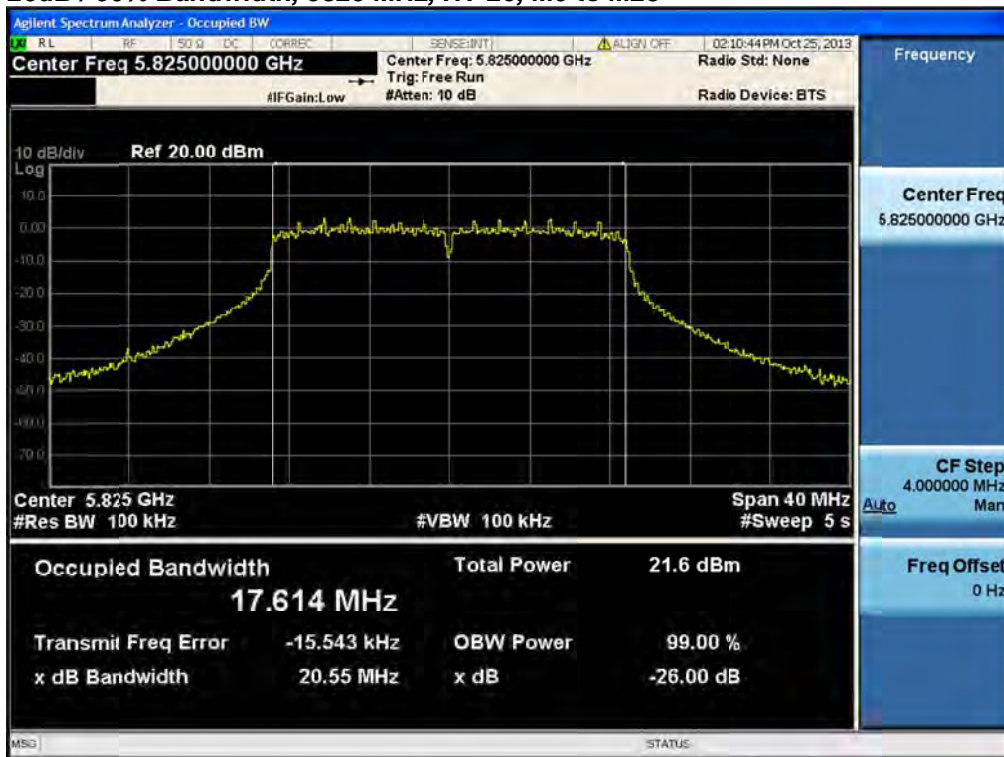
Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5745	Non HT-20, 6 to 54 Mbps	6	19.4	16.4
	HT-20, M0 to M23	m0	20.5	17.6
5755	Non HT-40, 6 to 54 Mbps	6	39.8	36.1
	HT-40, M0 to M23	m0	39.6	36
5785	Non HT-20, 6 to 54 Mbps	6	19.6	16.4
	HT-20, M0 to M23	m0	20.6	17.6
5795	Non HT-40, 6 to 54 Mbps	6	39.8	36.1
	HT-40, M0 to M23	m0	40	36
5825	Non HT-20, 6 to 54 Mbps	6	19.8	16.4
	HT-20, M0 to M23	m0	20.5	17.6

26dB / 99% Bandwidth, 5745 MHz, Non HT-20, 6 to 54 Mbps**26dB / 99% Bandwidth, 5745 MHz, HT-20, M0 to M23**

26dB / 99% Bandwidth, 5755 MHz, Non HT-40, 6 to 54 Mbps**26dB / 99% Bandwidth, 5755 MHz, HT-40, M0 to M23**

26dB / 99% Bandwidth, 5785 MHz, Non HT-20, 6 to 54 Mbps**26dB / 99% Bandwidth, 5785 MHz, HT-20, M0 to M23**

26dB / 99% Bandwidth, 5795 MHz, Non HT-40, 6 to 54 Mbps**26dB / 99% Bandwidth, 5795 MHz, HT-40, M0 to M23**

26dB / 99% Bandwidth, 5825 MHz, Non HT-20, 6 to 54 Mbps**26dB / 99% Bandwidth, 5825 MHz, HT-20, M0 to M23**



Peak Output Power

15.247: The maximum conducted output power of the intentional radiator for systems using digital modulation in the 5745-5825 MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum supported antenna gain is 4dBi. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

Enable "Channel Power" function of analyzer	
Center Frequency:	Frequency from table below
Span:	20 MHz (must be greater than 26dB bandwidth, adjust as necessary)
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	100ms, Single sweep
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Sample
Trace:	Trace Average 100 traces in Power Averaging Mode
Integration BW:	=26 dB BW from 26 dB Bandwidth Data

After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power.

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT-20, 6 to 54 Mbps	1	4	18.6		18.6	30	11.4
	Non HT-20, 6 to 54 Mbps	2	4	16.2	18.6	20.6	30	9.4
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	7	16.2	18.6	20.6	29	8.4
	HT-20, M0 to M7	1	4	16.0		16.0	30	14.0
	HT-20, M0 to M7	2	4	16.0	18.4	20.4	30	9.6
	HT-20, M8 to M15	2	4	16.0	18.4	20.4	30	9.6
	HT-20 Beam Forming, M0 to M7	2	7	16.0	18.4	20.4	29	8.6
	HT-20 Beam Forming, M8 to M15	2	4	16.0	18.4	20.4	30	9.6
	HT-20 STBC, M0 to M7	2	4	16.0	18.4	20.4	30	9.6
5755	Non HT-40, 6 to 54 Mbps	1	4	18.6		18.6	30	11.4
	Non HT-40, 6 to 54 Mbps	2	4	16.1	18.8	20.7	30	9.3
	HT-40, M0 to M7	1	4	15.7		15.7	30	14.3
	HT-40, M0 to M7	2	4	15.7	18.2	20.1	30	9.9
	HT-40, M8 to M15	2	4	15.7	18.2	20.1	30	9.9
	HT-40 Beam Forming, M0 to M7	2	7	15.7	18.2	20.1	29	8.9
	HT-40 Beam Forming, M8 to M15	2	4	15.7	18.2	20.1	30	9.9
	HT-40 STBC, M0 to M7	2	4	15.7	18.2	20.1	30	9.9
5785	Non HT-20, 6 to 54 Mbps	1	4	18.5		18.5	30	11.5
	Non HT-20, 6 to 54 Mbps	2	4	15.3	18.7	20.3	30	9.7
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	7	15.3	18.7	20.3	29	8.7
	HT-20, M0 to M7	1	4	15.2		15.2	30	14.8
	HT-20, M0 to M7	2	4	15.2	18.7	20.3	30	9.7
	HT-20, M8 to M15	2	4	15.2	18.7	20.3	30	9.7
	HT-20 Beam Forming, M0 to M7	2	7	15.2	18.7	20.3	29	8.7
	HT-20 Beam Forming, M8 to M15	2	4	15.2	18.7	20.3	30	9.7
	HT-20 STBC, M0 to M7	2	4	15.2	18.7	20.3	30	9.7
5795	Non HT-40, 6 to 54 Mbps	1	4	18.6		18.6	30	11.4
	Non HT-40, 6 to 54 Mbps	2	4	15.5	19.2	20.7	30	9.3
	HT-40, M0 to M7	1	4	15.0		15.0	30	15.0
	HT-40, M0 to M7	2	4	15.0	18.5	20.1	30	9.9
	HT-40, M8 to M15	2	4	15.0	18.5	20.1	30	9.9
	HT-40 Beam Forming, M0 to M7	2	7	15.0	18.5	20.1	29	8.9
	HT-40 Beam Forming, M8 to M15	2	4	15.0	18.5	20.1	30	9.9



	HT-40 STBC, M0 to M7	2	4	15.0	18.5	20.1	30	9.9
5825	Non HT-20, 6 to 54 Mbps	1	4	17.9		17.9	30	12.1
	Non HT-20, 6 to 54 Mbps	2	4	14.9	17.8	19.6	30	10.4
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	7	14.9	17.8	19.6	29	9.4
	HT-20, M0 to M7	1	4	14.7		14.7	30	15.3
	HT-20, M0 to M7	2	4	14.7	17.7	19.5	30	10.5
	HT-20, M8 to M15	2	4	14.7	17.7	19.5	30	10.5
	HT-20 Beam Forming, M0 to M7	2	7	14.7	17.7	19.5	29	9.5
	HT-20 Beam Forming, M8 to M15	2	4	14.7	17.7	19.5	30	10.5
	HT-20 STBC, M0 to M7	2	4	14.7	17.7	19.5	30	10.5

Peak Output Power, 5745 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Peak Output Power, 5745 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

Peak Output Power, 5745 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Peak Output Power, 5745 MHz, HT-20, M0 to M7****Antenna A**

Peak Output Power, 5745 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Peak Output Power, 5745 MHz, HT-20, M8 to M15****Antenna A****Antenna B**

Peak Output Power, 5745 MHz, HT-20 Beam Forming, M0 to M7



Antenna A



Antenna B

Peak Output Power, 5745 MHz, HT-20 Beam Forming, M8 to M15

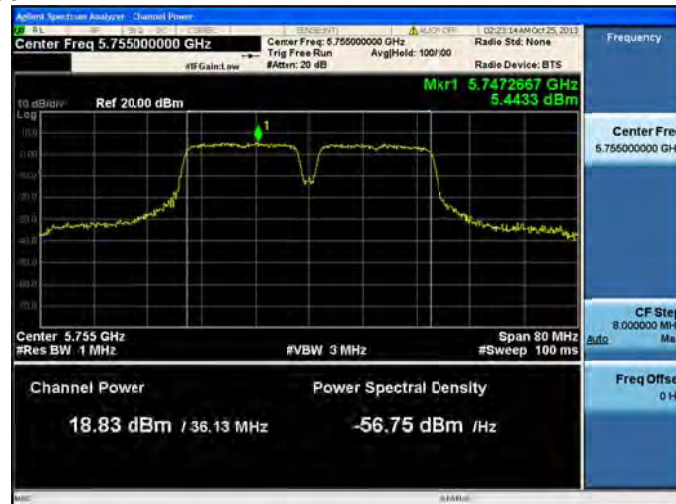


Antenna A



Antenna B

Peak Output Power, 5745 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Peak Output Power, 5755 MHz, Non HT-40, 6 to 54 Mbps****Antenna A**

Peak Output Power, 5755 MHz, Non HT-40, 6 to 54 Mbps**Antenna A****Antenna B****Peak Output Power, 5755 MHz, HT-40, M0 to M7****Antenna A**

Peak Output Power, 5755 MHz, HT-40, M0 to M7**Antenna A****Antenna B****Peak Output Power, 5755 MHz, HT-40, M8 to M15****Antenna A****Antenna B**

Peak Output Power, 5755 MHz, HT-40 Beam Forming, M0 to M7



Antenna A



Antenna B

Peak Output Power, 5755 MHz, HT-40 Beam Forming, M8 to M15



Antenna A



Antenna B

Peak Output Power, 5755 MHz, HT-40 STBC, M0 to M7



Antenna A



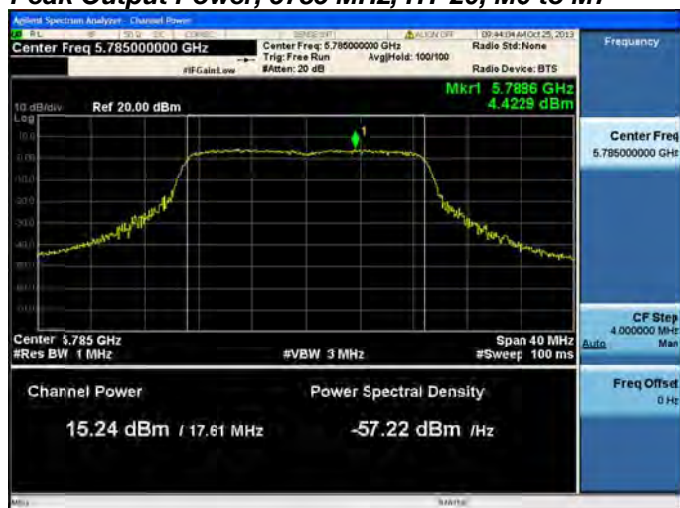
Antenna B

Peak Output Power, 5785 MHz, Non HT-20, 6 to 54 Mbps



Antenna A

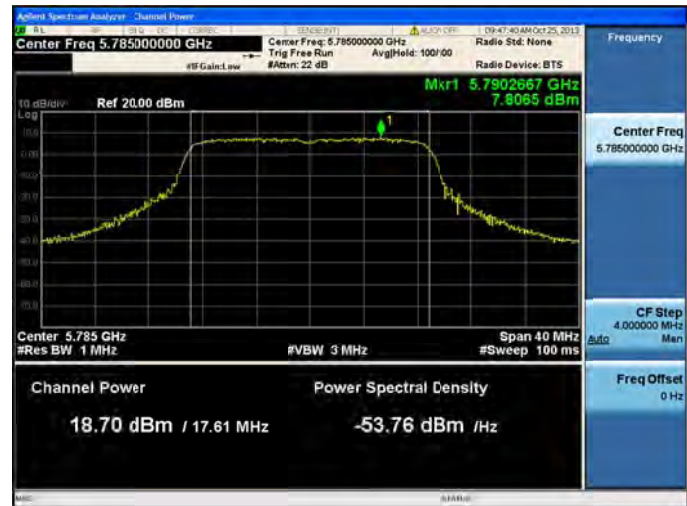
Peak Output Power, 5785 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Antenna B****Peak Output Power, 5785 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps****Antenna A****Antenna B**

Peak Output Power, 5785 MHz, HT-20, M0 to M7**Antenna A****Peak Output Power, 5785 MHz, HT-20, M0 to M7****Antenna A****Antenna B**

Peak Output Power, 5785 MHz, HT-20, M8 to M15



Antenna A



Antenna B

Peak Output Power, 5785 MHz, HT-20 Beam Forming, M0 to M7



Antenna A



Antenna B

Peak Output Power, 5785 MHz, HT-20 Beam Forming, M8 to M15



Antenna A



Antenna B

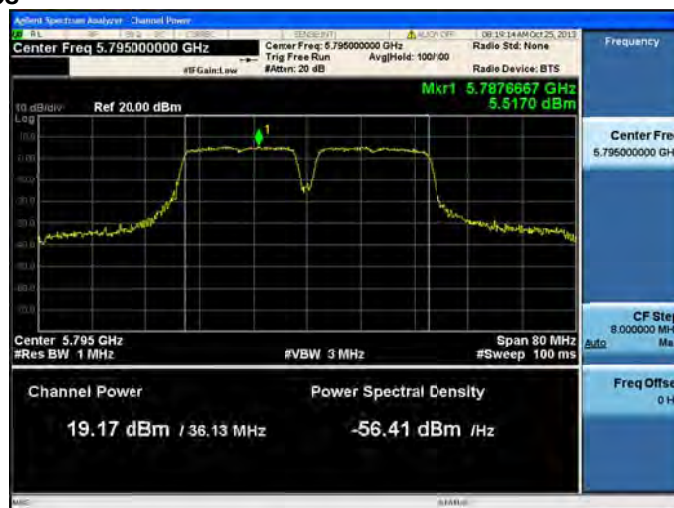
Peak Output Power, 5785 MHz, HT-20 STBC, M0 to M7



Antenna A



Antenna B

Peak Output Power, 5795 MHz, Non HT-40, 6 to 54 Mbps**Antenna A****Peak Output Power, 5795 MHz, Non HT-40, 6 to 54 Mbps****Antenna A****Antenna B**

Peak Output Power, 5795 MHz, HT-40, M0 to M7**Antenna A****Peak Output Power, 5795 MHz, HT-40, M0 to M7****Antenna A****Antenna B**

Peak Output Power, 5795 MHz, HT-40, M8 to M15



Antenna A



Antenna B

Peak Output Power, 5795 MHz, HT-40 Beam Forming, M0 to M7



Antenna A



Antenna B

Peak Output Power, 5795 MHz, HT-40 Beam Forming, M8 to M15



Antenna A



Antenna B

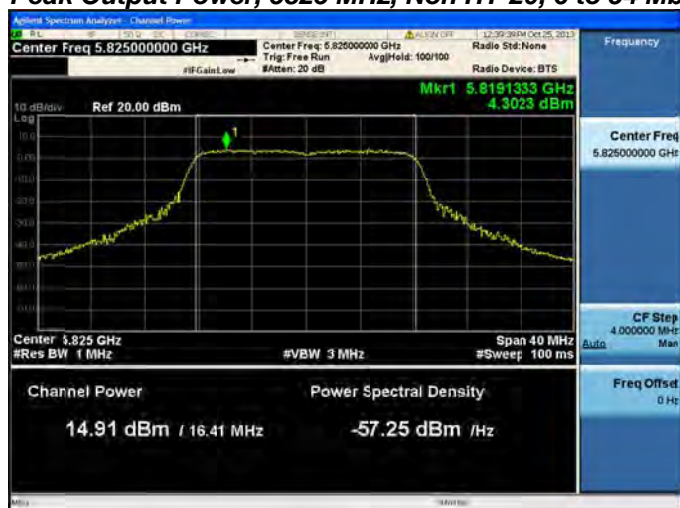
Peak Output Power, 5795 MHz, HT-40 STBC, M0 to M7



Antenna A



Antenna B

Peak Output Power, 5825 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Peak Output Power, 5825 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

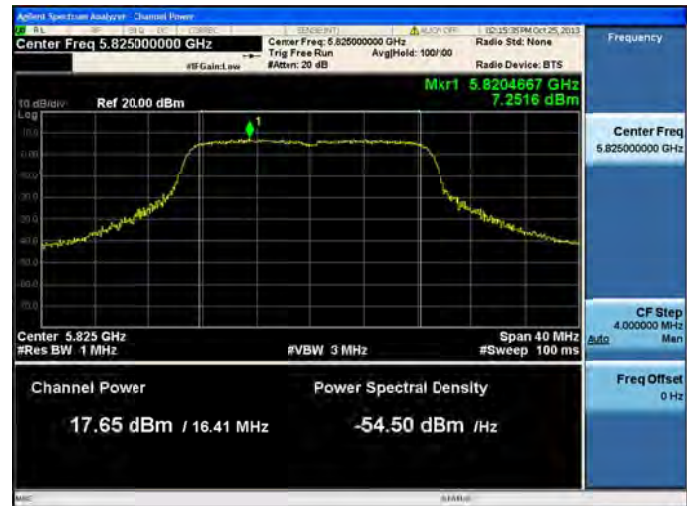
Peak Output Power, 5825 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Peak Output Power, 5825 MHz, HT-20, M0 to M7****Antenna A**

Peak Output Power, 5825 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Peak Output Power, 5825 MHz, HT-20, M8 to M15****Antenna A****Antenna B**

Peak Output Power, 5825 MHz, HT-20 Beam Forming, M0 to M7



Antenna A



Antenna B

Peak Output Power, 5825 MHz, HT-20 Beam Forming, M8 to M15



Antenna A



Antenna B

Peak Output Power, 5825 MHz, HT-20 STBC, M0 to M7



Antenna A



Antenna B



Power Spectral Density

15.247: For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

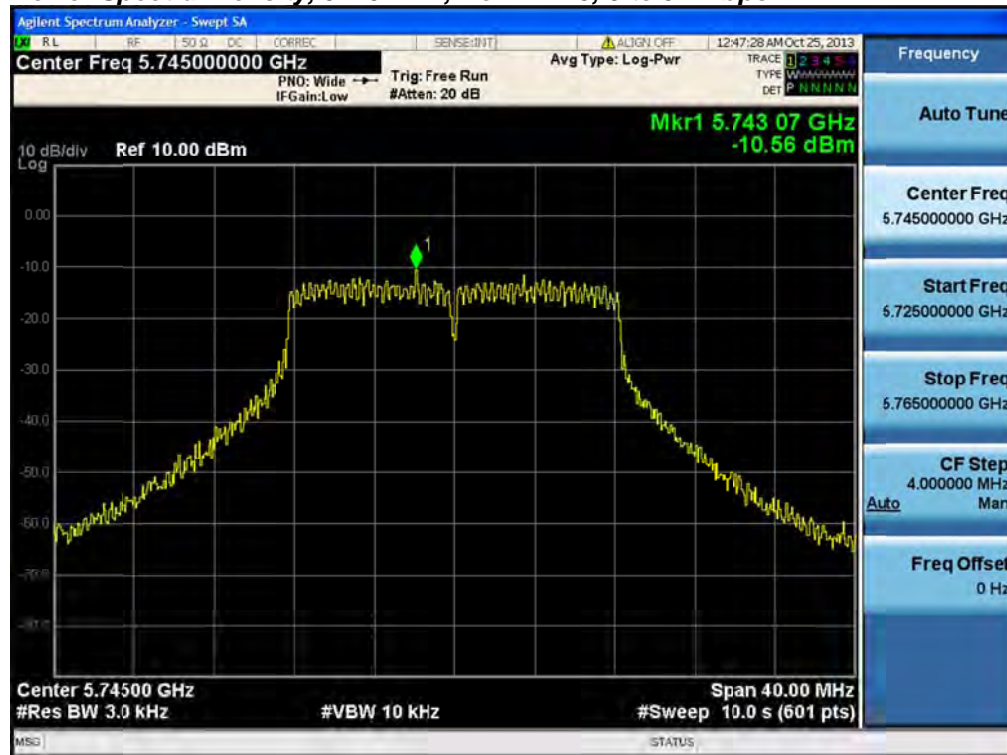
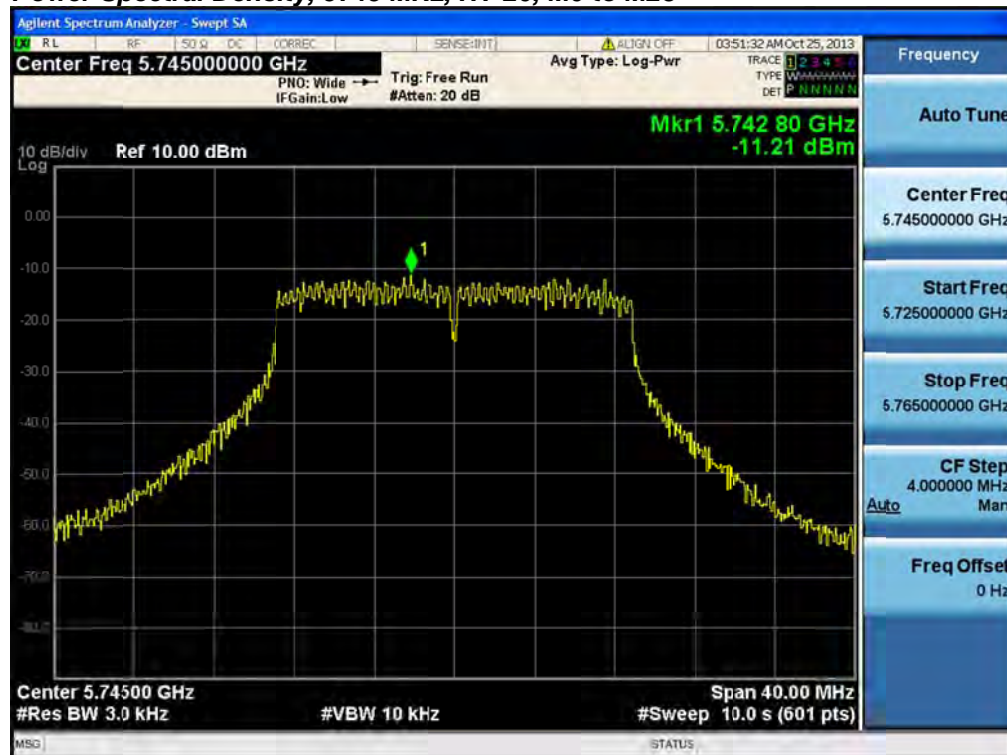
Center Frequency:	Frequency from table below
Span:	20 MHz
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	10s
Resolution Bandwidth:	3 kHz
Video Bandwidth:	10 kHz
Detector:	Peak
Trace:	Single
Marker:	Peak Search

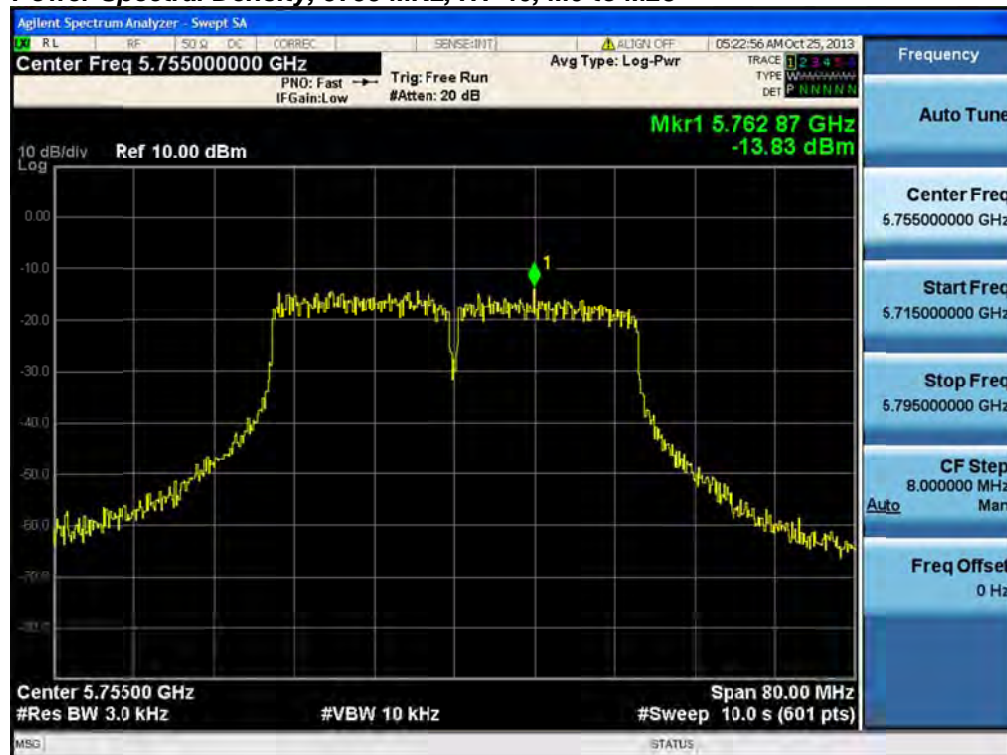
Record the Marker value.

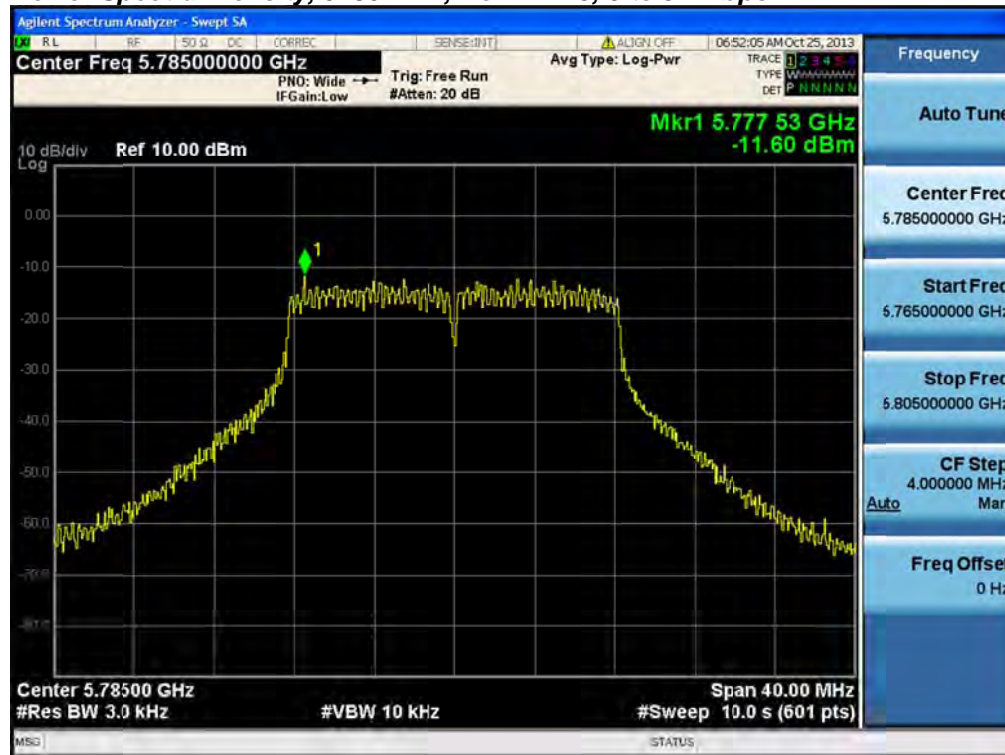
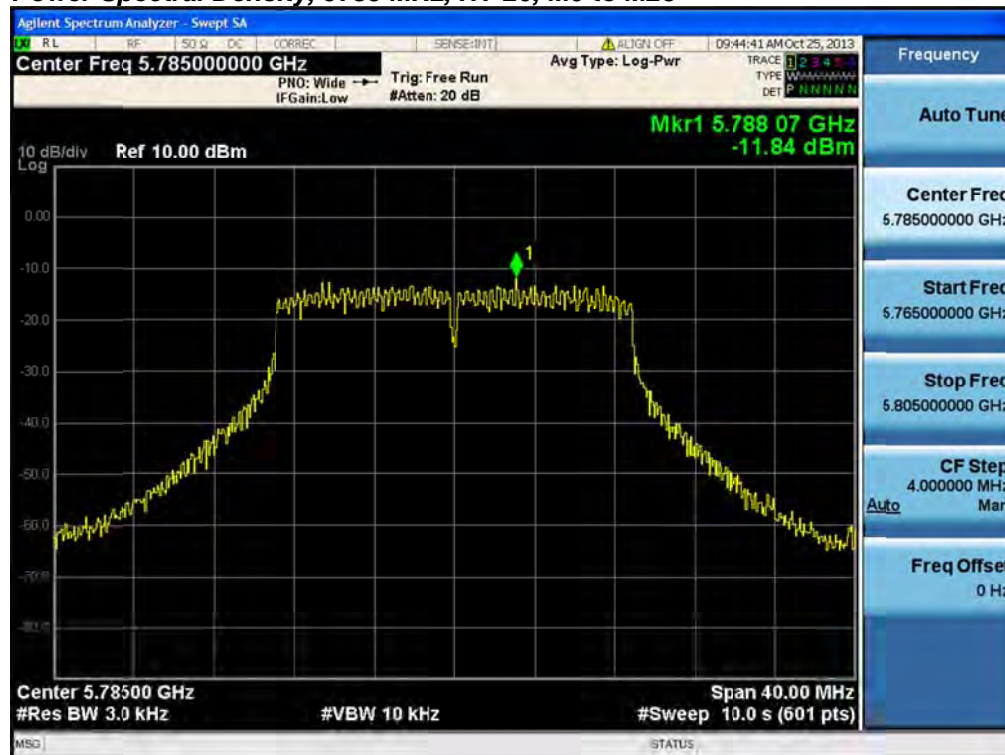
The "Measure and add $10 \log(N)$ dB technique", where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity $10 \log(4)$ (or 6dB) is added to the worst case spectrum value before comparing to the emission limit.

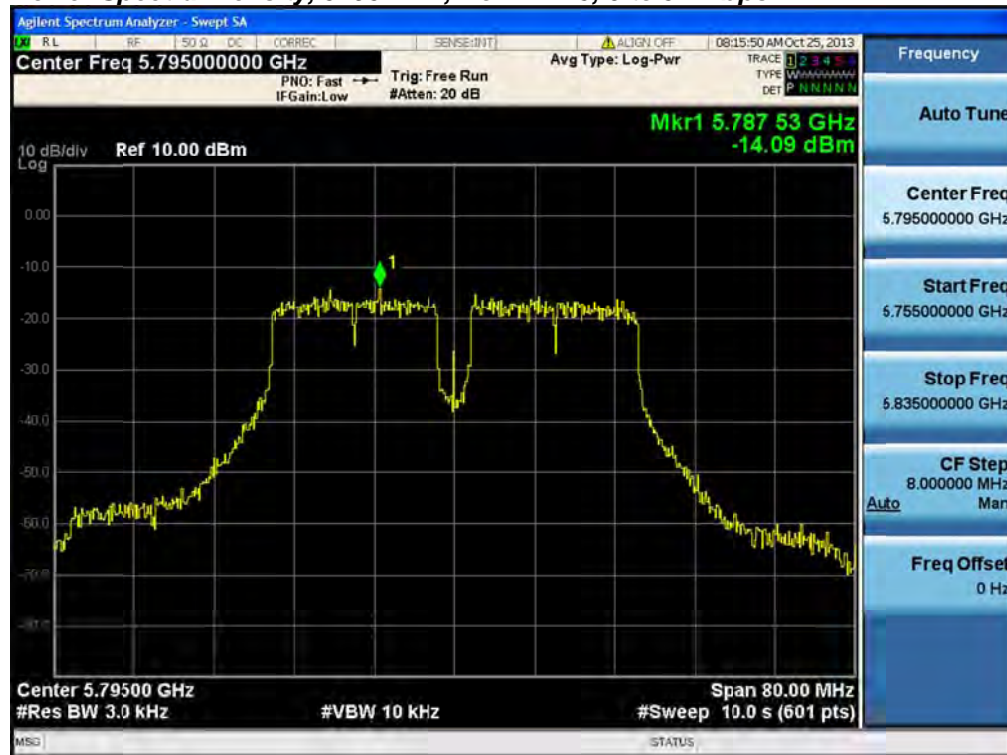


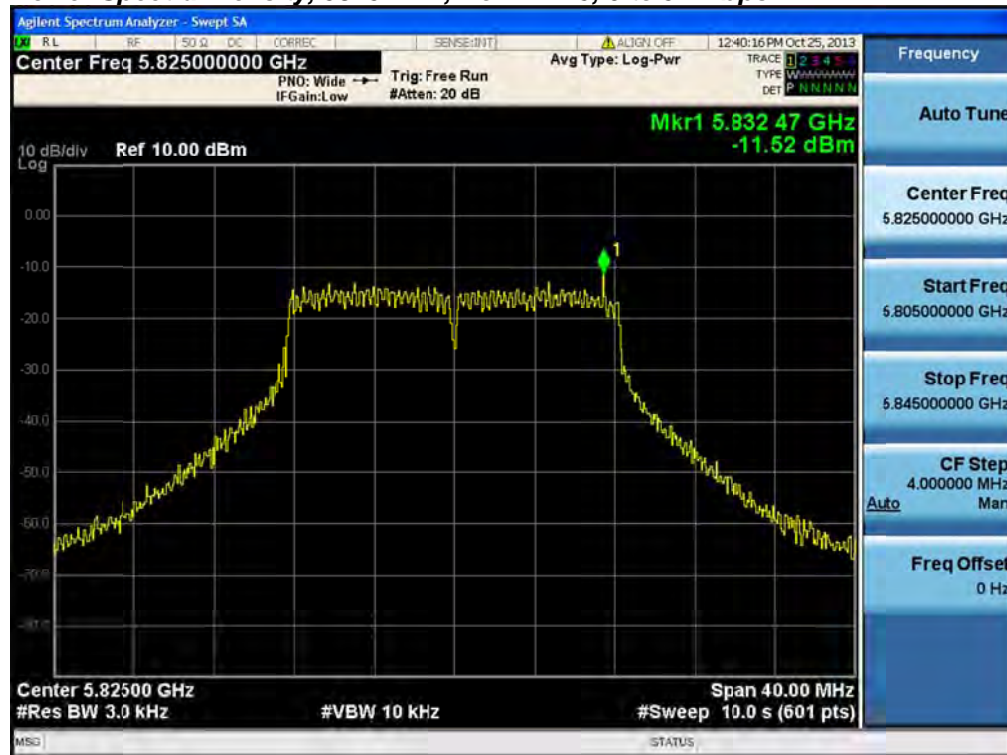
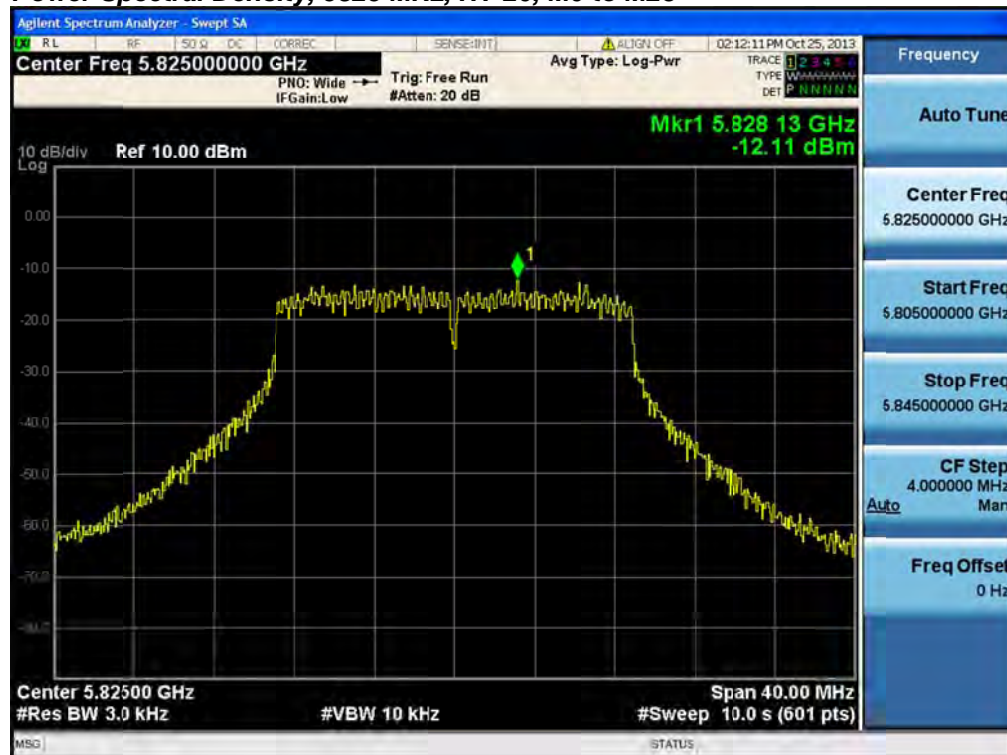
Frequency (MHz)	Mode	Data Rate (Mbps)	PSD / Antenna (dBm/3kHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
5745	Non HT-20, 6 to 54 Mbps	6	-10.6	-7.6	8.0	15.6
	HT-20, M0 to M23	m0	-11.2	-8.2	8.0	16.2
5755	Non HT-40, 6 to 54 Mbps	6	-13.8	-10.8	8.0	18.8
	HT-40, M0 to M23	m0	-13.8	-10.8	8.0	18.8
5785	Non HT-20, 6 to 54 Mbps	6	-11.6	-8.6	8.0	16.6
	HT-20, M0 to M23	m0	-11.8	-8.8	8.0	16.8
5795	Non HT-40, 6 to 54 Mbps	6	-14.1	-11.1	8.0	19.1
	HT-40, M0 to M23	m0	-13.7	-10.7	8.0	18.7
5825	Non HT-20, 6 to 54 Mbps	6	-11.5	-8.5	8.0	16.5
	HT-20, M0 to M23	m0	-12.1	-9.1	8.0	17.1

Power Spectral Density, 5745 MHz, Non HT-20, 6 to 54 Mbps**Power Spectral Density, 5745 MHz, HT-20, M0 to M23**

Power Spectral Density, 5755 MHz, Non HT-40, 6 to 54 Mbps**Power Spectral Density, 5755 MHz, HT-40, M0 to M23**

Power Spectral Density, 5785 MHz, Non HT-20, 6 to 54 Mbps**Power Spectral Density, 5785 MHz, HT-20, M0 to M23**

Power Spectral Density, 5795 MHz, Non HT-40, 6 to 54 Mbps**Power Spectral Density, 5795 MHz, HT-40, M0 to M23**

Power Spectral Density, 5825 MHz, Non HT-20, 6 to 54 Mbps**Power Spectral Density, 5825 MHz, HT-20, M0 to M23**



Conducted Spurious Emission

15.247: In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

Span:	30 MHz-26 GHz
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	300 kHz
Detector:	Peak
Trace:	Single
Marker:	Peak

Record the marker waveform peak to spur difference

Out-of-band and spurious emissions tests are performed on each output individually without summing or adding 10 log(N) since the measurements are made relative to the in-band emissions on the individual outputs. The worst case output is recorded.



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT-20, 6 to 54 Mbps	1	4	-56.2		-52.2	-41.25	11.0
	Non HT-20, 6 to 54 Mbps	2	4	-58.5	-57.9	-51.2	-41.25	9.9
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	7	-58.5	-57.9	-48.2	-41.25	6.9
	HT-20, M0 to M7	1	4	-58.5		-54.5	-41.25	13.3
	HT-20, M0 to M7	2	4	-58.5	-58.0	-51.2	-41.25	10.0
	HT-20, M8 to M15	2	4	-58.5	-58.0	-51.2	-41.25	10.0
	HT-20 Beam Forming, M0 to M7	2	7	-58.5	-58.0	-48.2	-41.25	7.0
	HT-20 Beam Forming, M8 to M15	2	4	-58.5	-58.0	-51.2	-41.25	10.0
	HT-20 STBC, M0 to M7	2	4	-58.5	-58.0	-51.2	-41.25	10.0
5755	Non HT-40, 6 to 54 Mbps	1	4	-58.5		-54.5	-41.25	13.3
	Non HT-40, 6 to 54 Mbps	2	4	-58.3	-57.8	-51.0	-41.25	9.8
	HT-40, M0 to M7	1	4	-58.3		-54.3	-41.25	13.1
	HT-40, M0 to M7	2	4	-58.3	-58.1	-51.2	-41.25	9.9
	HT-40, M8 to M15	2	4	-58.3	-58.1	-51.2	-41.25	9.9
	HT-40 Beam Forming, M0 to M7	2	7	-58.3	-58.1	-48.2	-41.25	6.9
	HT-40 Beam Forming, M8 to M15	2	4	-58.3	-58.1	-51.2	-41.25	9.9
	HT-40 STBC, M0 to M7	2	4	-58.3	-58.1	-51.2	-41.25	9.9
5785	Non HT-20, 6 to 54 Mbps	1	4	-56.3		-52.3	-41.25	11.1
	Non HT-20, 6 to 54 Mbps	2	4	-58.1	-57.8	-50.9	-41.25	9.7
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	7	-58.1	-57.8	-47.9	-41.25	6.7
	HT-20, M0 to M7	1	4	-58.3		-54.3	-41.25	13.1
	HT-20, M0 to M7	2	4	-58.3	-57.8	-51.0	-41.25	9.8
	HT-20, M8 to M15	2	4	-58.3	-57.8	-51.0	-41.25	9.8
	HT-20 Beam Forming, M0 to M7	2	7	-58.3	-57.8	-48.0	-41.25	6.8
	HT-20 Beam Forming, M8 to M15	2	4	-58.3	-57.8	-51.0	-41.25	9.8
	HT-20 STBC, M0 to M7	2	4	-58.3	-57.8	-51.0	-41.25	9.8
5795	Non HT-40, 6 to 54 Mbps	1	4	-58.2		-54.2	-41.25	13.0
	Non HT-40, 6 to 54 Mbps	2	4	-58.2	-57.7	-50.9	-41.25	9.7
	HT-40, M0 to M7	1	4	-58.2		-54.2	-41.25	13.0
	HT-40, M0 to M7	2	4	-58.2	-57.9	-51.0	-41.25	9.8
	HT-40, M8 to M15	2	4	-58.2	-57.9	-51.0	-41.25	9.8
	HT-40 Beam Forming, M0 to M7	2	7	-58.2	-57.9	-48.0	-41.25	6.8



	HT-40 Beam Forming, M8 to M15	2	4	-58.2	-57.9	-51.0	-41.25	9.8
	HT-40 STBC, M0 to M7	2	4	-58.2	-57.9	-51.0	-41.25	9.8
5825	Non HT-20, 6 to 54 Mbps	1	4	-55.8		-51.8	-41.25	10.6
	Non HT-20, 6 to 54 Mbps	2	4	-58.0	-57.7	-50.8	-41.25	9.6
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	7	-58.0	-57.7	-47.8	-41.25	6.6
	HT-20, M0 to M7	1	4	-58.0		-54.0	-41.25	12.8
	HT-20, M0 to M7	2	4	-58.0	-57.6	-50.8	-41.25	9.5
	HT-20, M8 to M15	2	4	-58.0	-57.6	-50.8	-41.25	9.5
	HT-20 Beam Forming, M0 to M7	2	7	-58.0	-57.6	-47.8	-41.25	6.5
	HT-20 Beam Forming, M8 to M15	2	4	-58.0	-57.6	-50.8	-41.25	9.5
	HT-20 STBC, M0 to M7	2	4	-58.0	-57.6	-50.8	-41.25	9.5



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT-20, 6 to 54 Mbps	1	4	-62.2		-58.2	-27	31.2
	Non HT-20, 6 to 54 Mbps	2	4	-62.7	-63.0	-55.8	-27	28.8
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	7	-62.7	-63.0	-52.8	-27	25.8
	HT-20, M0 to M7	1	4	-61.7		-57.7	-27	30.7
	HT-20, M0 to M7	2	4	-61.7	-62.4	-55.0	-27	28.0
	HT-20, M8 to M15	2	4	-61.7	-62.4	-55.0	-27	28.0
	HT-20 Beam Forming, M0 to M7	2	7	-61.7	-62.4	-52.0	-27	25.0
	HT-20 Beam Forming, M8 to M15	2	4	-61.7	-62.4	-55.0	-27	28.0
	HT-20 STBC, M0 to M7	2	4	-61.7	-62.4	-55.0	-27	28.0
5755	Non HT-40, 6 to 54 Mbps	1	4	-62.4		-58.4	-27	31.4
	Non HT-40, 6 to 54 Mbps	2	4	-63.8	-61.0	-55.2	-27	28.2
	HT-40, M0 to M7	1	4	-63.0		-59.0	-27	32.0
	HT-40, M0 to M7	2	4	-63.0	-63.2	-56.1	-27	29.1
	HT-40, M8 to M15	2	4	-63.0	-63.2	-56.1	-27	29.1
	HT-40 Beam Forming, M0 to M7	2	7	-63.0	-63.2	-53.1	-27	26.1
	HT-40 Beam Forming, M8 to M15	2	4	-63.0	-63.2	-56.1	-27	29.1
	HT-40 STBC, M0 to M7	2	4	-63.0	-63.2	-56.1	-27	29.1
5785	Non HT-20, 6 to 54 Mbps	1	4	-63.4		-59.4	-27	32.4
	Non HT-20, 6 to 54 Mbps	2	4	-61.6	-62.5	-55.0	-27	28.0
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	7	-61.6	-62.5	-52.0	-27	25.0
	HT-20, M0 to M7	1	4	-61.1		-57.1	-27	30.1
	HT-20, M0 to M7	2	4	-61.1	-63.7	-55.2	-27	28.2
	HT-20, M8 to M15	2	4	-61.1	-63.7	-55.2	-27	28.2
	HT-20 Beam Forming, M0 to M7	2	7	-61.1	-63.7	-52.2	-27	25.2
	HT-20 Beam Forming, M8 to M15	2	4	-61.1	-63.7	-55.2	-27	28.2
	HT-20 STBC, M0 to M7	2	4	-61.1	-63.7	-55.2	-27	28.2
5795	Non HT-40, 6 to 54 Mbps	1	4	-62.5		-58.5	-27	31.5
	Non HT-40, 6 to 54 Mbps	2	4	-64.1	-63.9	-57.0	-27	30.0
	HT-40, M0 to M7	1	4	-63.1		-59.1	-27	32.1
	HT-40, M0 to M7	2	4	-63.1	-62.1	-55.6	-27	28.6
	HT-40, M8 to M15	2	4	-63.1	-62.1	-55.6	-27	28.6
	HT-40 Beam Forming, M0 to M7	2	7	-63.1	-62.1	-52.6	-27	25.6



	HT-40 Beam Forming, M8 to M15	2	4	-63.1	-62.1	-55.6	-27	28.6
	HT-40 STBC, M0 to M7	2	4	-63.1	-62.1	-55.6	-27	28.6
5825	Non HT-20, 6 to 54 Mbps	1	4	-62.7		-58.7	-27	31.7
	Non HT-20, 6 to 54 Mbps	2	4	-63.0	-62.0	-55.5	-27	28.5
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	7	-63.0	-62.0	-52.5	-27	25.5
	HT-20, M0 to M7	1	4	-62.5		-58.5	-27	31.5
	HT-20, M0 to M7	2	4	-62.5	-62.7	-55.6	-27	28.6
	HT-20, M8 to M15	2	4	-62.5	-62.7	-55.6	-27	28.6
	HT-20 Beam Forming, M0 to M7	2	7	-62.5	-62.7	-52.6	-27	25.6
	HT-20 Beam Forming, M8 to M15	2	4	-62.5	-62.7	-55.6	-27	28.6
	HT-20 STBC, M0 to M7	2	4	-62.5	-62.7	-55.6	-27	28.6

Agilent Spectrum Analyzer - Swept SA

X R L	R F	I 50 G DC	SENSE INT	ALIGN OFF	11:54:51 PM Apr 26, 2013
-------	-----	-----------	-----------	-----------	--------------------------

Display Line -51.25 dBm

PNO: Fast IF Gain: High Trig: Free Run #Atten: 0 dB Avg Type: Log-Pwr

TRACE 1 2 3 4 5
TYPE W W W W W W W W
DET P N N N N N

The main plot area shows a spectrum with a green horizontal reference line at -51.25 dBm. The y-axis scale is set to 10 dB/div. A yellow trace representing the signal level fluctuates around -70 dBm.

Ref Offset 12.62 dB
Ref -10.00 dBm

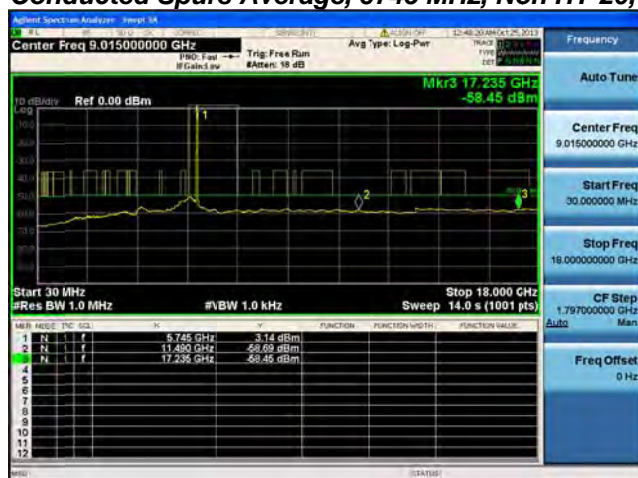
Start 18.00 GHz Stop 40.00 GHz
#Res BW 1.0 MHz #VBW 3.0 MHz Sweep 36.7 ms (1001 pts)

MUR MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE								
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								

MSG STATUS

On On

- Annotation
- Title
- Graticule
- Display Line -51.25 dBm
- System Display Settings

Conducted Spurs Average, 5745 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Conducted Spurs Average, 5745 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

Conducted Spurs Average, 5745 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Conducted Spurs Average, 5745 MHz, HT-20, M0 to M7****Antenna A**

Conducted Spurs Average, 5745 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Conducted Spurs Average, 5745 MHz, HT-20, M8 to M15****Antenna A****Antenna B**

Conducted Spurs Average, 5745 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Conducted Spurs Average, 5745 MHz, HT-20 Beam Forming, M8 to M15****Antenna A****Antenna B**

Conducted Spurs Average, 5745 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Conducted Spurs Average, 5755 MHz, Non HT-40, 6 to 54 Mbps****Antenna A**

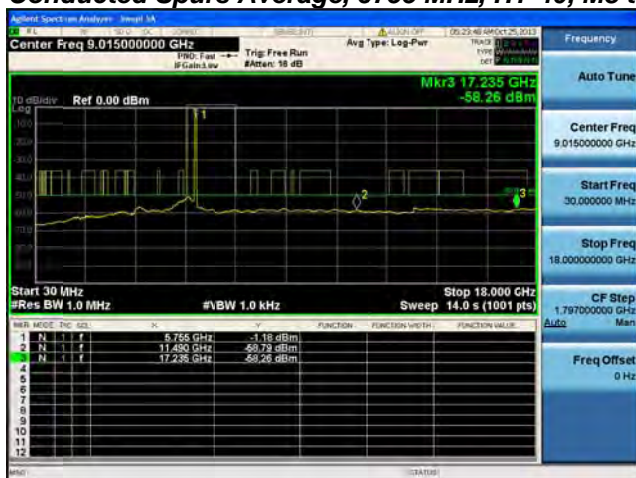
Conducted Spurs Average, 5755 MHz, Non HT-40, 6 to 54 Mbps**Antenna A****Antenna B****Conducted Spurs Average, 5755 MHz, HT-40, M0 to M7****Antenna A**

Conducted Spurs Average, 5755 MHz, HT-40, M0 to M7

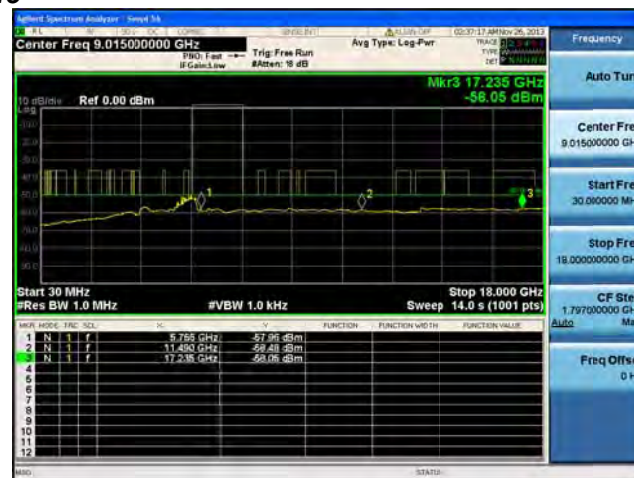
Antenna A



Antenna B

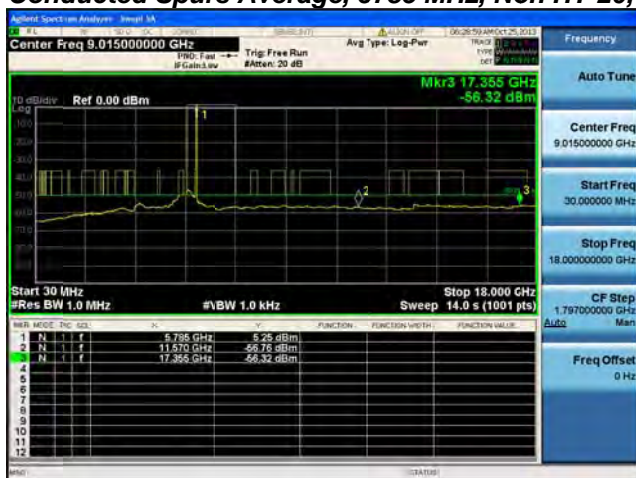
Conducted Spurs Average, 5755 MHz, HT-40, M8 to M15

Antenna A



Antenna B

Conducted Spurs Average, 5755 MHz, HT-40 Beam Forming, M0 to M7**Antenna A****Antenna B****Conducted Spurs Average, 5755 MHz, HT-40 Beam Forming, M8 to M15****Antenna A****Antenna B**

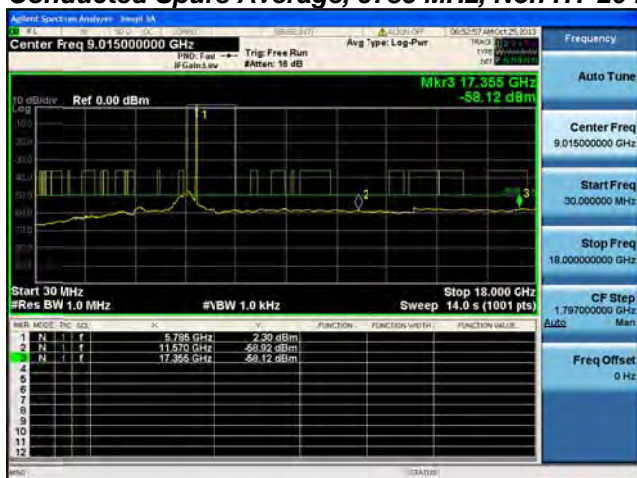
Conducted Spurs Average, 5755 MHz, HT-40 STBC, M0 to M7**Antenna A****Antenna B****Conducted Spurs Average, 5785 MHz, Non HT-20, 6 to 54 Mbps****Antenna A**

Conducted Spurs Average, 5785 MHz, Non HT-20, 6 to 54 Mbps

Antenna A



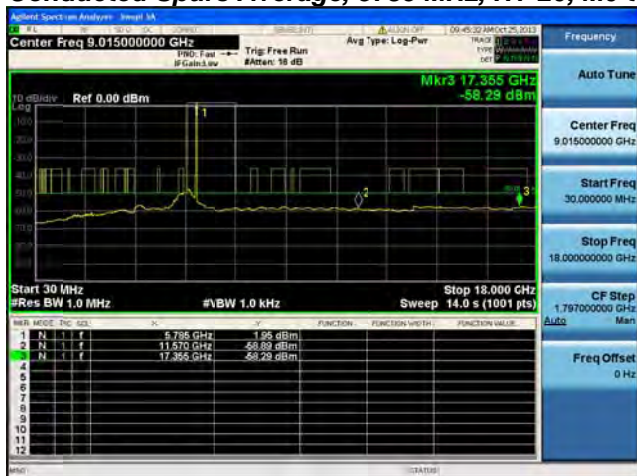
Antenna B

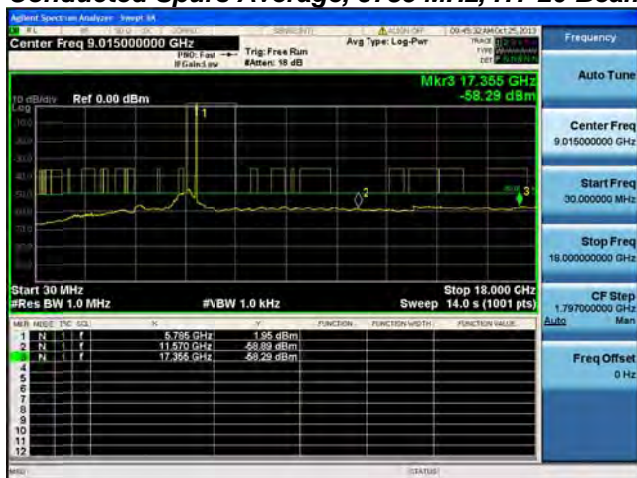
Conducted Spurs Average, 5785 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps

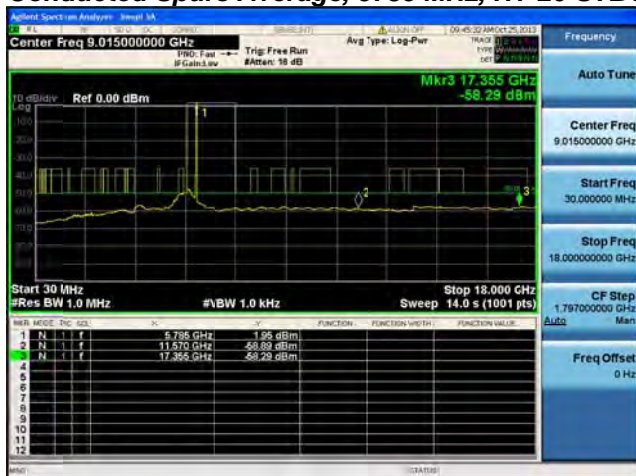
Antenna A

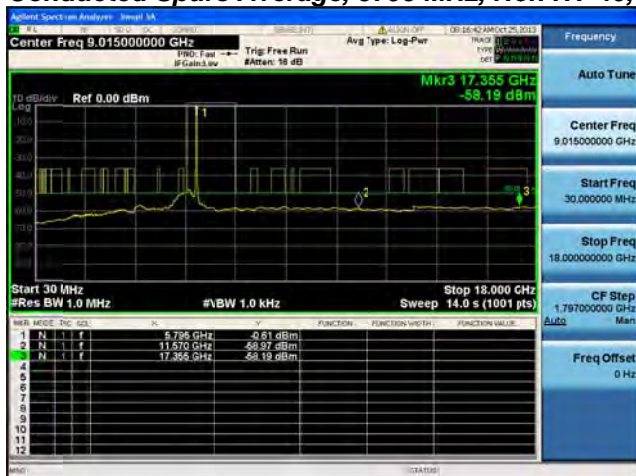


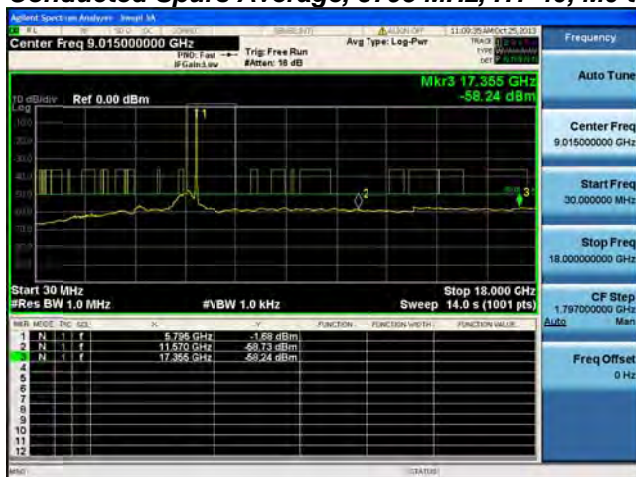
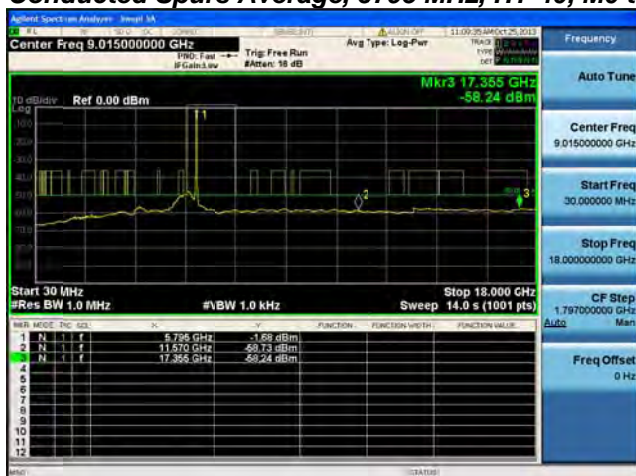
Antenna B

Conducted Spurs Average, 5785 MHz, HT-20, M0 to M7**Antenna A****Conducted Spurs Average, 5785 MHz, HT-20, M0 to M7****Antenna A****Antenna B**

**Conducted Spurs Average, 5785 MHz, HT-20, M8 to M15****Antenna A****Antenna B****Conducted Spurs Average, 5785 MHz, HT-20 Beam Forming, M0 to M7****Antenna A****Antenna B**

Conducted Spurs Average, 5785 MHz, HT-20 Beam Forming, M8 to M15**Antenna A****Antenna B****Conducted Spurs Average, 5785 MHz, HT-20 STBC, M0 to M7****Antenna A****Antenna B**

Conducted Spurs Average, 5795 MHz, Non HT-40, 6 to 54 Mbps**Antenna A****Conducted Spurs Average, 5795 MHz, Non HT-40, 6 to 54 Mbps****Antenna A****Antenna B**

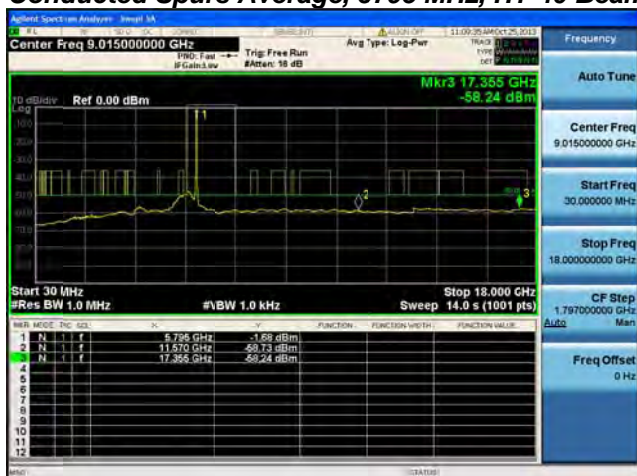
Conducted Spurs Average, 5795 MHz, HT-40, M0 to M7**Antenna A****Conducted Spurs Average, 5795 MHz, HT-40, M0 to M7****Antenna A****Antenna B**

Conducted Spurs Average, 5795 MHz, HT-40, M8 to M15

Antenna A



Antenna B

Conducted Spurs Average, 5795 MHz, HT-40 Beam Forming, M0 to M7

Antenna A



Antenna B

Conducted Spurs Average, 5795 MHz, HT-40 Beam Forming, M8 to M15

Antenna A



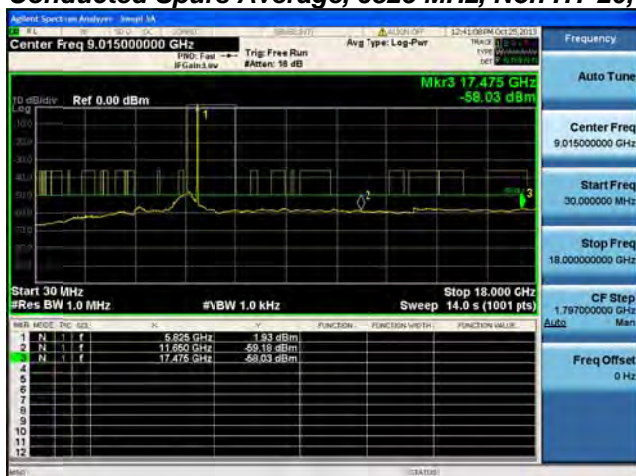
Antenna B

Conducted Spurs Average, 5795 MHz, HT-40 STBC, M0 to M7

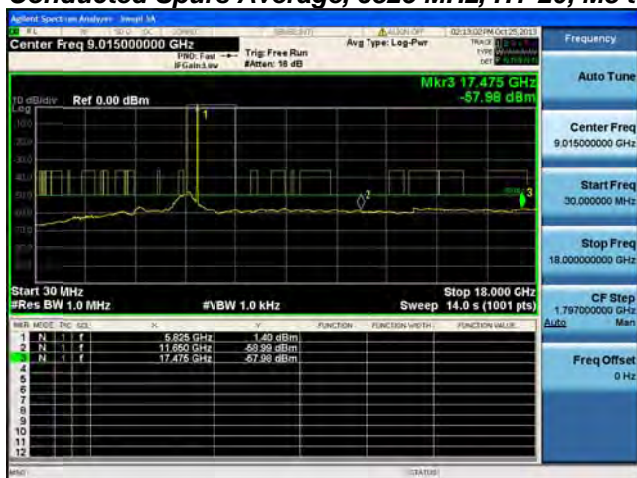
Antenna A

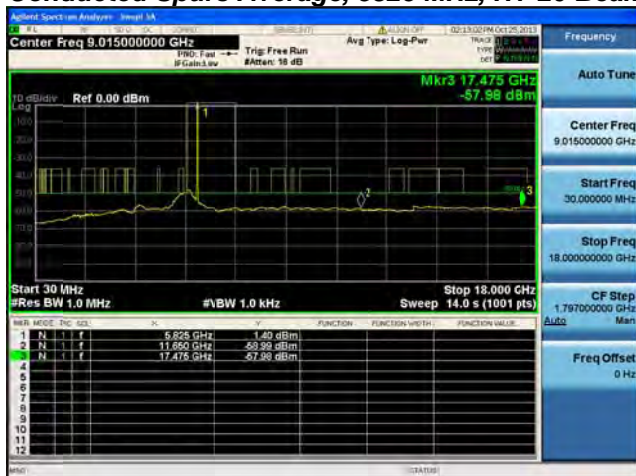


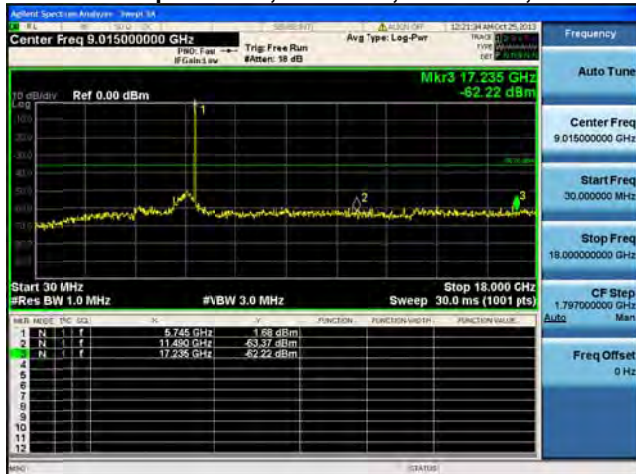
Antenna B

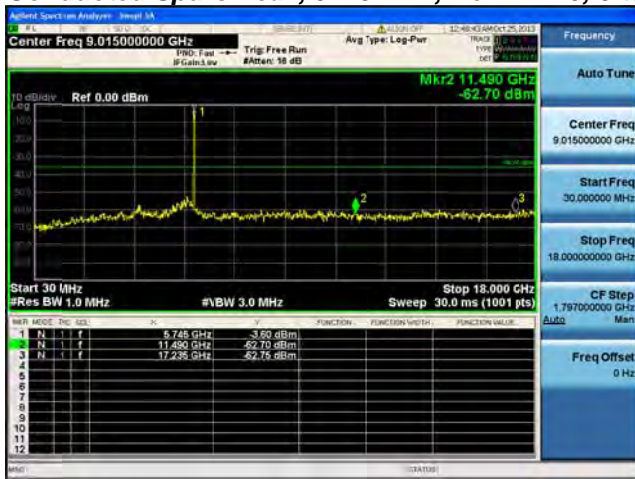
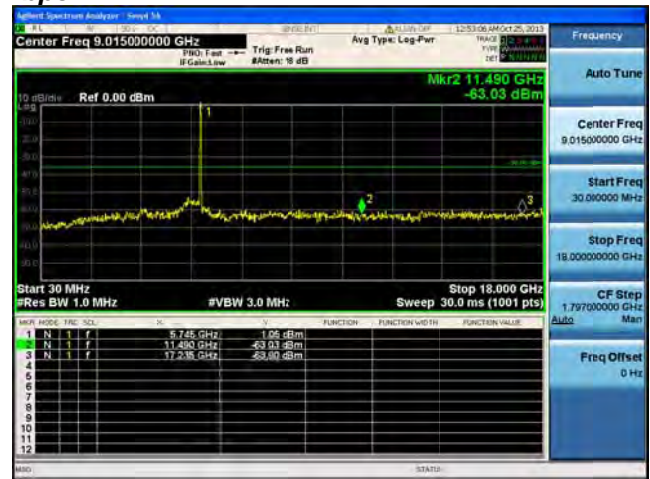
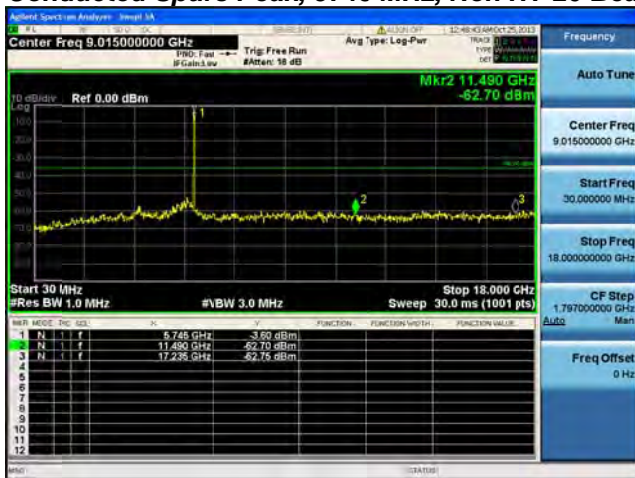
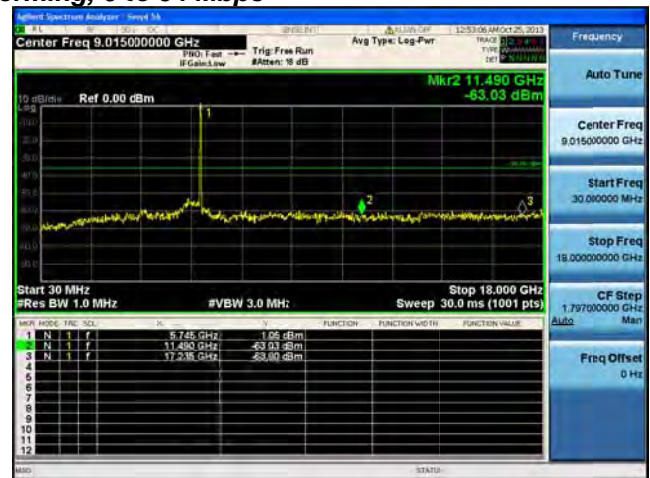
Conducted Spurs Average, 5825 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Conducted Spurs Average, 5825 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

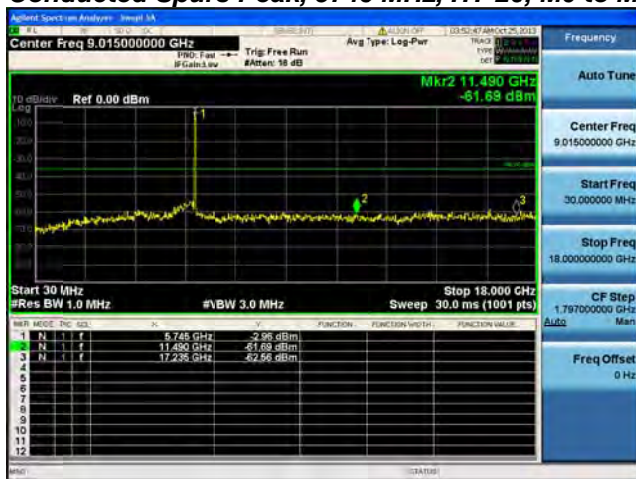
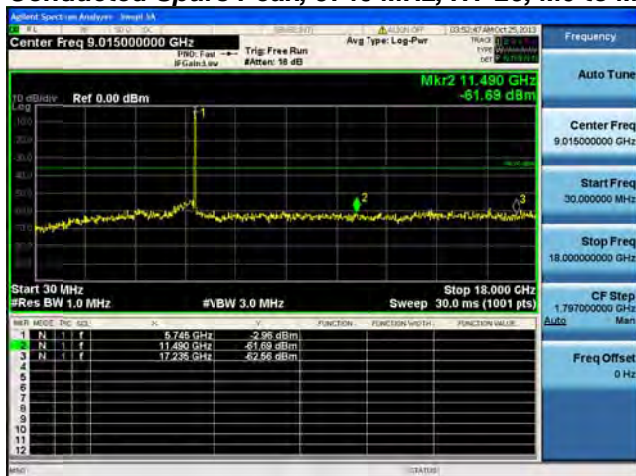
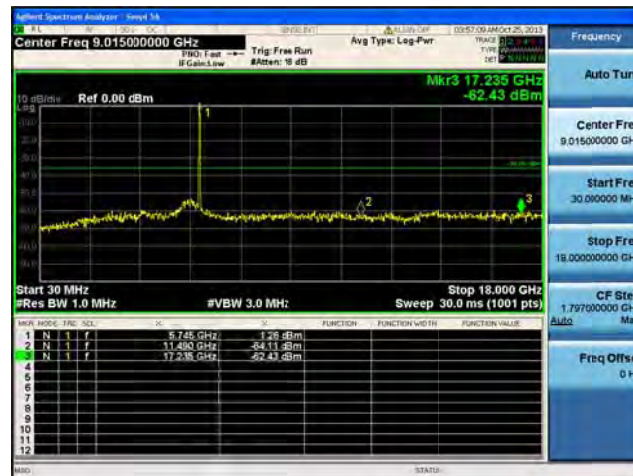
Conducted Spurs Average, 5825 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Conducted Spurs Average, 5825 MHz, HT-20, M0 to M7****Antenna A**

Conducted Spurs Average, 5825 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Conducted Spurs Average, 5825 MHz, HT-20, M8 to M15****Antenna A****Antenna B**

Conducted Spurs Average, 5825 MHz, HT-20 Beam Forming, M0 to M7**Antenna A****Antenna B****Conducted Spurs Average, 5825 MHz, HT-20 Beam Forming, M8 to M15****Antenna A****Antenna B**

Conducted Spurs Average, 5825 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Conducted Spurs Peak, 5745 MHz, Non HT-20, 6 to 54 Mbps****Antenna A**

**Conducted Spurs Peak, 5745 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B****Conducted Spurs Peak, 5745 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps****Antenna A****Antenna B**

Conducted Spurs Peak, 5745 MHz, HT-20, M0 to M7**Antenna A****Conducted Spurs Peak, 5745 MHz, HT-20, M0 to M7****Antenna A****Antenna B**

Different Spectrum Analyzer - Sample 3A
 10.000000 GHz 10.000000 MHz
 Center Freq 9.015000000 GHz
 FREQ: Freq → Trip Free Run
 IF Gain: 10 dB BATTEN: 10 dB
 Avg Type: Log-Pwr
 TRACK 1: F 11.490 GHz
 TYPE: Marker
 DET: 10.000000
 10.000000 GHz 10.000000 MHz
 Mkr2 11.490 GHz
 -61.69 dBm
 10.000000 GHz 10.000000 MHz
 Ref 0.00 dBm
 10.000000 GHz 10.000000 MHz
 Start 30 MHz Stop 18.000 GHz
 Res BW 1.0 MHz #BW 3.0 MHz Sweep 30.0 ms (1001 pts)
 MARKER MODE: Freq GHz dBm
 1 N 11.490 GHz -61.69 dBm
 2 N 11.490 GHz -61.69 dBm
 3 N 17.236 GHz -62.56 dBm
 4
 5
 6
 7
 8
 9
 10
 11
 12
 FUNCTION FUNCTION VALUE
 FUNCTION VALUE
 FUNCTION VALUE
 Auto Man
 Freq Offset
 0 Hz

Center Freq 9.015000000 GHz

Start 30 MHz

Res BW 1.0 MHz

VBW 3.0 MHz

Sweep 30.0 ms (1001 pts)

Mkr3 17.235 GHz -62.43 dBm

MARK	MODE	FREQ	SCL	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	9.745 GHz	f	-6.28 dBm			
2	N	11.490 GHz	f	-64.11 dBm			
3	N	17.235 GHz	f	-62.43 dBm			

Center Freq 9.015000000 GHz

Trig: Free Run

Avg Type: Log-Pwr

11.490 GHz

-61.69 dBm

Start 30 MHz

Stop 18.000 GHz

Res BW 1.0 MHz

RBW 3.0 MHz

Sweep 30.0 ms (101 pts)

Row	Mode	Freq (GHz)	Power (dBm)	Function	Function Value	Function Unit
1	N	11.490	-61.69			
2	N	11.490	-61.69			
3	N	17.238	-62.56			

Center Freq 9.015000000 GHz

Auto Tune

Start Freq 9.015000000 GHz

Stop Freq 30.000000000 MHz

CF Step 1.797000000 GHz

Auto Man

Freq Offset 0 Hz

Start 30 MHz

Res BW 1.0 MHz

VBW 3.0 MHz

Sweep 30.0 ms (1001 pts)

Mkr3 17.235 GHz

-62.43 dBm

MARK	MODE	FREQ	SE	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	9.745 GHz	-61.25 dBm	
2	N	1	f	17.490 GHz	-64.11 dBm	
3	N	1	f	17.235 GHz	-62.43 dBm	

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Different Spectrum Analyzer - Sample 3A
 10.000000 GHz 10.000000 MHz
 Center Freq 9.015000000 GHz
 F100: Fast
 F0: Catch view
 Trip Free Run
 BATT: 98 dB
 Avg Type: Log-Pwr
 TRACK ON
 10.000000 GHz
 10.000000 MHz
 10.000000 GHz
 10.000000 MHz
 Mkr2 11.490 GHz
 -61.69 dBm
 10 dBm
 Ref 0.00 dBm
 10 dBm
 10.000000 GHz
 10.000000 MHz
 10.000000 GHz
 10.000000 MHz
 Start 30 MHz
 Stop 18.000 GHz
 Res BW 1.0 MHz
 #BW 3.0 MHz
 Sweep 30.0 ms (1001 pts)
 MARKER MODE: FREQ, DBM
 F1: 11.490 GHz, -61.69 dBm
 F2: 11.490 GHz, -61.69 dBm
 F3: 17.236 GHz, -62.56 dBm
 FUNCTION: FUNCTION VALUE: FUNCTION VALUE: FUNCTION VALUE:
 F1: 11.490 GHz, -61.69 dBm
 F2: 11.490 GHz, -61.69 dBm
 F3: 17.236 GHz, -62.56 dBm
 Freq Offset: 0 Hz

Spectrum Analyzer Screenshot:
 Center Freq: 9.015000000 GHz
 Fwd: 1st run
 Trig: Free Run
 Ave Type: Log-Pwr
 Mkr3 17.236 GHz
 -62.43 dBm
 Start 30 MHz
 Stop 18.000 GHz
 Res BW 3.0 MHz
 Sweep 30.0 ms (1001 pts)

Center Freq 9.015000000 GHz
 100. Fast
 0.000000000 GHz

Trig: Free Run
 0.000000000 s

Avg Type: Log-Pwr
 0.000000000 s

Frequency
 Auto Tune

Center Freq
 9.015000000 GHz

Start Freq
 30.000000 GHz

Stop Freq
 18.000000000 GHz

CF Step
 1.797000000 GHz

Freq Offset
 0 Hz

Start 30 MHz
 30.000000000 GHz

Stop 18.000 GHz
 18.000000000 GHz

Res BW 1.0 MHz
 1.000000000 MHz

#BW 3.0 MHz
 3.000000000 MHz

Sweep 30.0 ms (100 pts)
 30.000000000 ms

Mkr2 11.490 GHz
-61.69 dBm

MARK	FREQ	POWER	FUNCTION	FUNCTION VALUE	FUNCTION VALUE
1	11.490 GHz	-61.69 dBm			
2	11.490 GHz	-61.69 dBm			
3	17.238 GHz	-62.56 dBm			

Vector Signal Analyzer - Simulink

Center Freq 9.015000000 GHz

Ref: 0.00 dBm

Trig: Free Run

Avg Type: Log-Pwr

Trace 1: 9.015 GHz

Trace 2: 17.236 GHz

Trace 3: 17.236 GHz

Trace 4: 17.236 GHz

Trace 5: 17.236 GHz

Trace 6: 17.236 GHz

Trace 7: 17.236 GHz

Trace 8: 17.236 GHz

Trace 9: 17.236 GHz

Trace 10: 17.236 GHz

Trace 11: 17.236 GHz

Trace 12: 17.236 GHz

Trace 13: 17.236 GHz

Trace 14: 17.236 GHz

Trace 15: 17.236 GHz

Trace 16: 17.236 GHz

Trace 17: 17.236 GHz

Trace 18: 17.236 GHz

Trace 19: 17.236 GHz

Trace 20: 17.236 GHz

Trace 21: 17.236 GHz

Trace 22: 17.236 GHz

Trace 23: 17.236 GHz

Trace 24: 17.236 GHz

Trace 25: 17.236 GHz

Trace 26: 17.236 GHz

Trace 27: 17.236 GHz

Trace 28: 17.236 GHz

Trace 29: 17.236 GHz

Trace 30: 17.236 GHz

Trace 31: 17.236 GHz

Trace 32: 17.236 GHz

Trace 33: 17.236 GHz

Trace 34: 17.236 GHz

Trace 35: 17.236 GHz

Trace 36: 17.236 GHz

Trace 37: 17.236 GHz

Trace 38: 17.236 GHz

Trace 39: 17.236 GHz

Trace 40: 17.236 GHz

Trace 41: 17.236 GHz

Trace 42: 17.236 GHz

Trace 43: 17.236 GHz

Trace 44: 17.236 GHz

Trace 45: 17.236 GHz

Trace 46: 17.236 GHz

Trace 47: 17.236 GHz

Trace 48: 17.236 GHz

Trace 49: 17.236 GHz

Trace 50: 17.236 GHz

Trace 51: 17.236 GHz

Trace 52: 17.236 GHz

Trace 53: 17.236 GHz

Trace 54: 17.236 GHz

Trace 55: 17.236 GHz

Trace 56: 17.236 GHz

Trace 57: 17.236 GHz

Trace 58: 17.236 GHz

Trace 59: 17.236 GHz

Trace 60: 17.236 GHz

Trace 61: 17.236 GHz

Trace 62: 17.236 GHz

Trace 63: 17.236 GHz

Trace 64: 17.236 GHz

Trace 65: 17.236 GHz

Trace 66: 17.236 GHz

Trace 67: 17.236 GHz

Trace 68: 17.236 GHz

Trace 69: 17.236 GHz

Trace 70: 17.236 GHz

Trace 71: 17.236 GHz

Trace 72: 17.236 GHz

Trace 73: 17.236 GHz

Trace 74: 17.236 GHz

Trace 75: 17.236 GHz

Trace 76: 17.236 GHz

Trace 77: 17.236 GHz

Trace 78: 17.236 GHz

Trace 79: 17.236 GHz

Trace 80: 17.236 GHz

Trace 81: 17.236 GHz

Trace 82: 17.236 GHz

Trace 83: 17.236 GHz

Trace 84: 17.236 GHz

Trace 85: 17.236 GHz

Trace 86: 17.236 GHz

Trace 87: 17.236 GHz

Trace 88: 17.236 GHz

Trace 89: 17.236 GHz

Trace 90: 17.236 GHz

Trace 91: 17.236 GHz

Trace 92: 17.236 GHz

Trace 93: 17.236 GHz

Trace 94: 17.236 GHz

Trace 95: 17.236 GHz

Trace 96: 17.236 GHz

Trace 97: 17.236 GHz

Trace 98: 17.236 GHz

Trace 99: 17.236 GHz

Trace 100: 17.236 GHz

Trace 101: 17.236 GHz

Trace 102: 17.236 GHz

Trace 103: 17.236 GHz

Trace 104: 17.236 GHz

Trace 105: 17.236 GHz

Trace 106: 17.236 GHz

Trace 107: 17.236 GHz

Trace 108: 17.236 GHz

Trace 109: 17.236 GHz

Trace 110: 17.236 GHz

Trace 111: 17.236 GHz

Trace 112: 17.236 GHz

Trace 113: 17.236 GHz

Trace 114: 17.236 GHz

Trace 115: 17.236 GHz

Trace 116: 17.236 GHz

Trace 117: 17.236 GHz

Trace 118: 17.236 GHz

Trace 119: 17.236 GHz

Trace 120: 17.236 GHz

Trace 121: 17.236 GHz

Trace 122: 17.236 GHz

Trace 123: 17.236 GHz

Trace 124: 17.236 GHz

Trace 125: 17.236 GHz

Trace 126: 17.236 GHz

Trace 127: 17.236 GHz

Trace 128: 17.236 GHz

Trace 129: 17.236 GHz

Trace 130: 17.236 GHz

Trace 131: 17.236 GHz

Trace 132: 17.236 GHz

Trace 133: 17.236 GHz

Trace 134: 17.236 GHz

Trace 135: 17.236 GHz

Trace 136: 17.236 GHz

Trace 137: 17.236 GHz

Trace 138: 17.236 GHz

Trace 139: 17.236 GHz

Trace 140: 17.236 GHz

Trace 141: 17.236 GHz

Trace 142: 17.236 GHz

Trace 143: 17.236 GHz

Trace 144: 17.236 GHz

Trace 145: 17.236 GHz

Trace 146: 17.236 GHz

Trace 147: 17.236 GHz

Trace 148: 17.236 GHz

Trace 149: 17.236 GHz

Trace 150: 17.236 GHz

Trace 151: 17.236 GHz

Trace 152: 17.236 GHz

Trace 153: 17.236 GHz

Trace 154: 17.236 GHz

Trace 155: 17.236 GHz

Trace 156: 17.236 GHz

Trace 157: 17.236 GHz

Trace 158: 17.236 GHz

Trace 159: 17.236 GHz

Trace 160: 17.236 GHz

Trace 161: 17.236 GHz

Trace 162: 17.236 GHz

Trace 163: 17.236 GHz

Trace 164: 17.236 GHz

Trace 165: 17.236 GHz

Trace 166: 17.236 GHz

Trace 167: 17.236 GHz

Trace 168: 17.236 GHz

Trace 169: 17.236 GHz

Trace 170: 17.236 GHz

Trace 171: 17.236 GHz

Trace 172: 17.236 GHz

Trace 173: 17.236 GHz

Trace 174: 17.236 GHz

Trace 175: 17.236 GHz

Trace 176: 17.236 GHz

Trace 177: 17.236 GHz

Trace 178: 17.236 GHz

Trace 179: 17.236 GHz

Trace 180: 17.236 GHz

Trace 181: 17.236 GHz

Trace 182: 17.236 GHz

Trace 183: 17.236 GHz

Trace 184: 17.236 GHz

Trace 185: 17.236 GHz

Trace 186: 17.236 GHz

Trace 187: 17.236 GHz

Trace 188: 17.236 GHz

Trace 189: 17.236 GHz

Trace 190: 17.236 GHz

Trace 191: 17.236 GHz

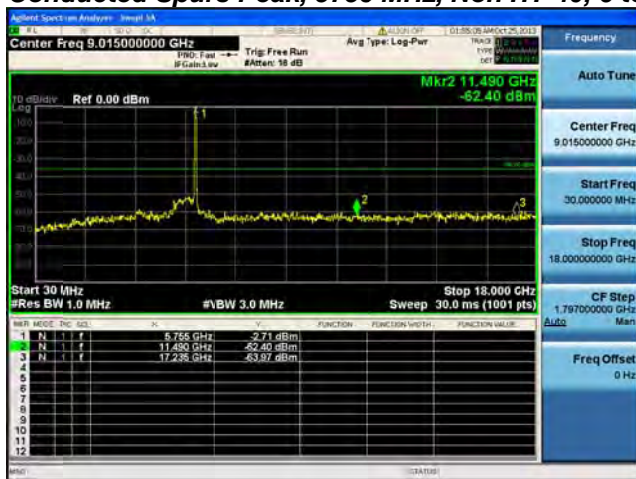
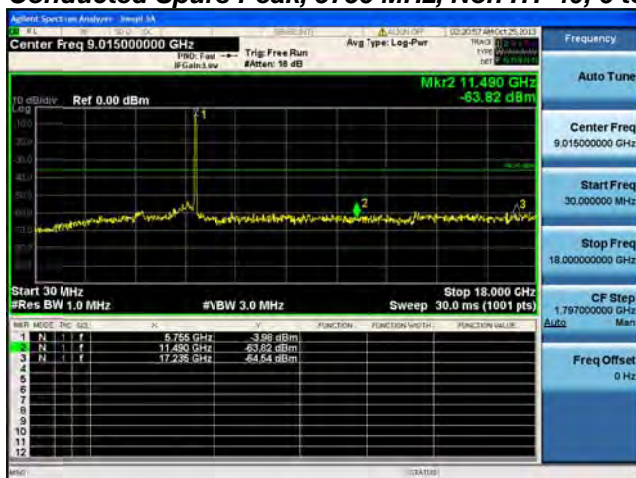
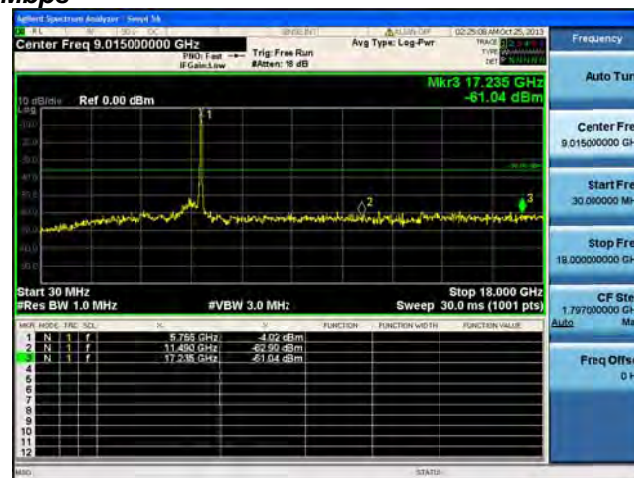
Trace 192: 17.236 GHz

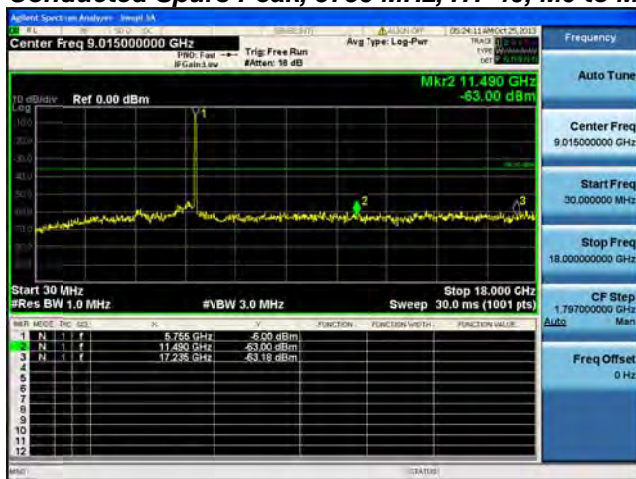
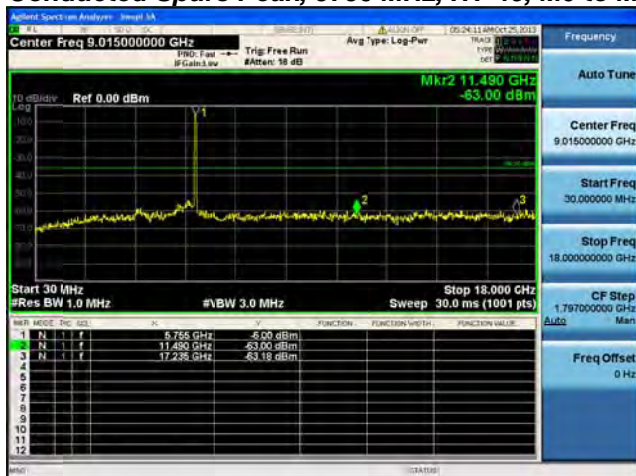
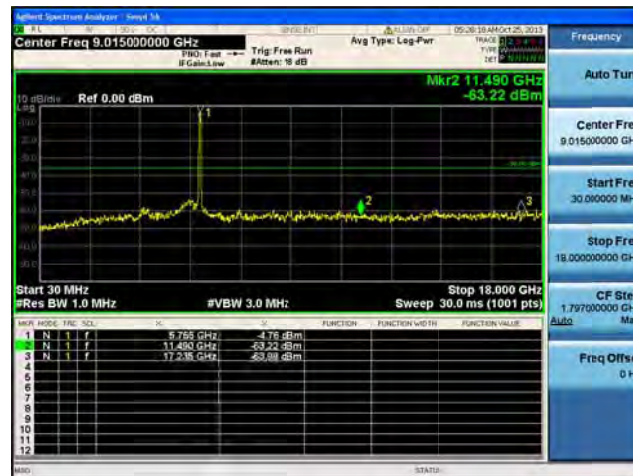
Trace 193: 17.236 GHz

Trace 194: 17.236 GHz

Trace

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurs Peak, 5755 MHz, Non HT-40, 6 to 54 Mbps**Antenna A****Conducted Spurs Peak, 5755 MHz, Non HT-40, 6 to 54 Mbps****Antenna A****Antenna B**

Conducted Spurs Peak, 5755 MHz, HT-40, M0 to M7**Antenna A****Conducted Spurs Peak, 5755 MHz, HT-40, M0 to M7****Antenna A****Antenna B**

[illegible][illegible]

Keysight Spectrum Analyzer - Single Span

Center Freq 9.015000000 GHz Trg: Free Run Avg Type: Log-Pwr

Ref 0.00 dBm

Mkr2 11.490 GHz -63.00 dBm

Start 30 MHz Stop 18.000 GHz

Res BW 1.0 MHz RBW 3.0 MHz Sweep 30.0 ms (1001 pts)

Marker	Mode	Pre Sel	Unit	F	P	Function	Function Switch	Function Value
1	N	f		5.755 GHz	-65.00 dBm			
2	N	f		11.490 GHz	-63.00 dBm			
3	N	f		17.238 GHz	-63.18 dBm			

Frequency

Auto Tune

Center Freq 9.015000000 GHz

Start Freq 30.000000 MHz

Stop Freq 18.000000000 GHz

CF Step 1.797000000 GHz

Freq Offset 0 Hz

Center Freq 9.015020000 GHz

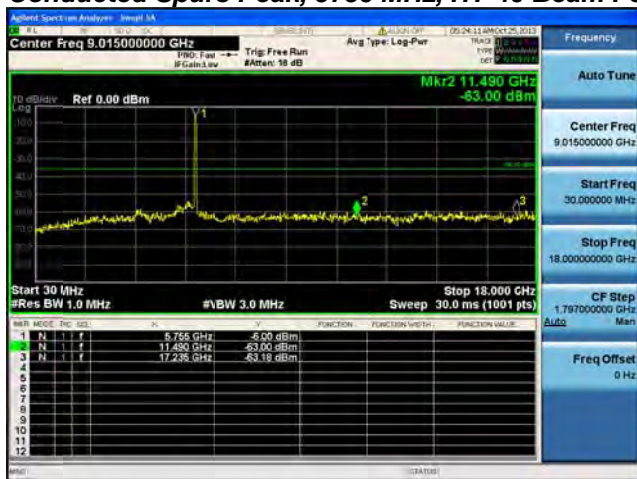
Ref 0.00 dBm

Nkr2 11.490 GHz -63.22 dBm

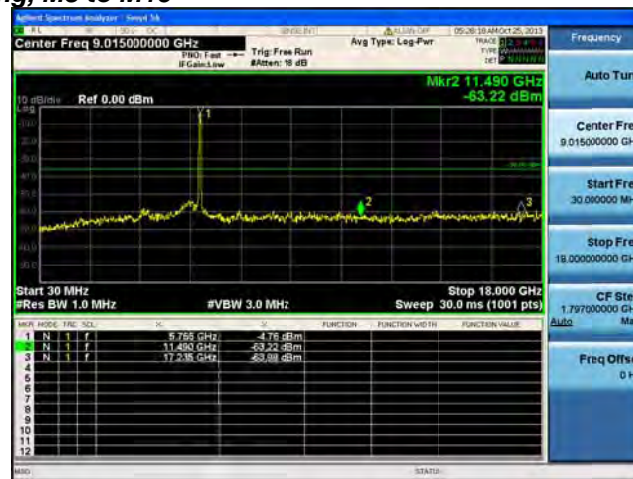
Start 30 MHz
Res BW 1.0 MHz
#VBW 3.0 MHz
Sweep 30.0 ms (1001 pts)

MARK	FREQ	FLC	SQL	Hz	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	9.785 GHz	-47.6 dBm			
2	N	1	f	11.490 GHz	-63.22 dBm			
3	N	1	f	17.235 GHz	-63.08 dBm			
4	N	1	f					
5	N	1	f					
6	N	1	f					
7	N	1	f					
8	N	1	f					
9	N	1	f					
10	N	1	f					
11	N	1	f					
12	N	1	f					

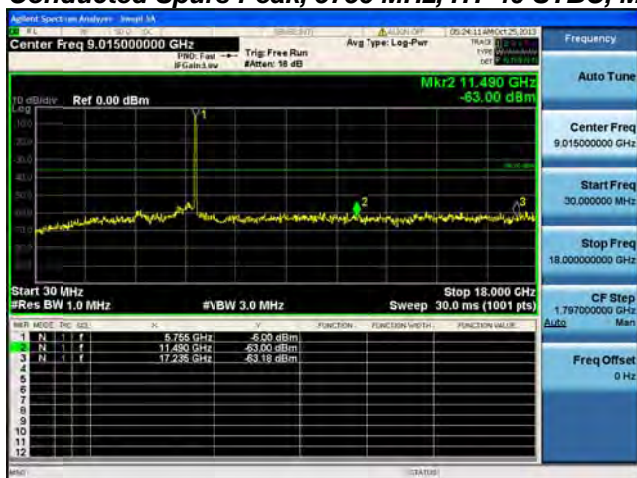
This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

Conducted Spurs Peak, 5755 MHz, HT-40 Beam Forming, M8 to M15

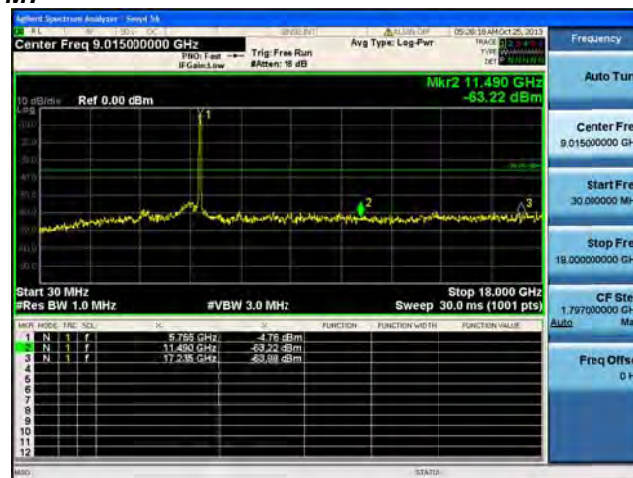
Antenna A



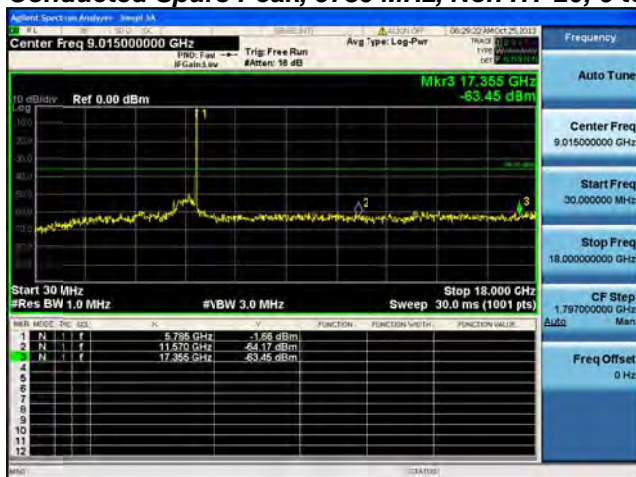
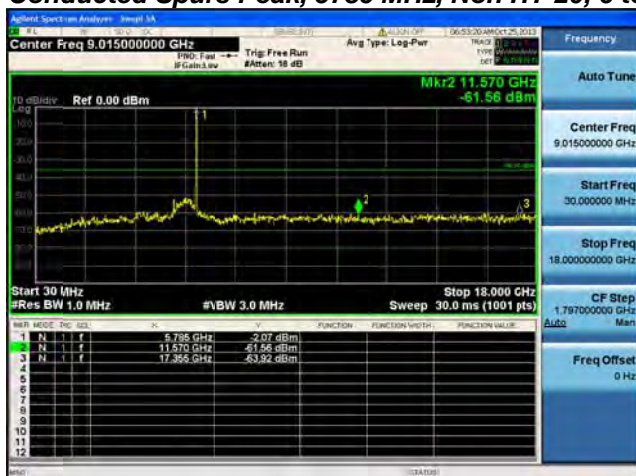
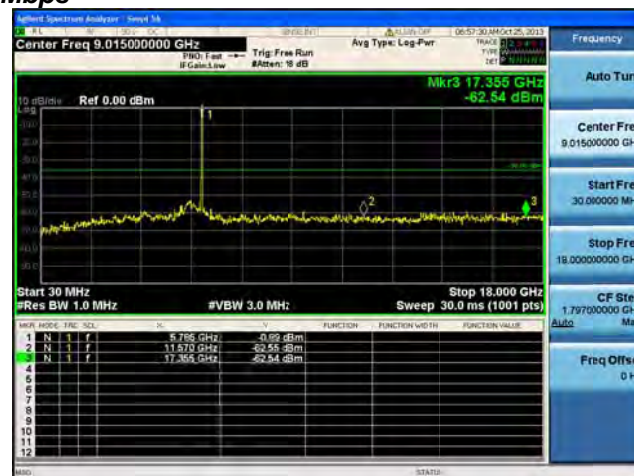
Antenna B

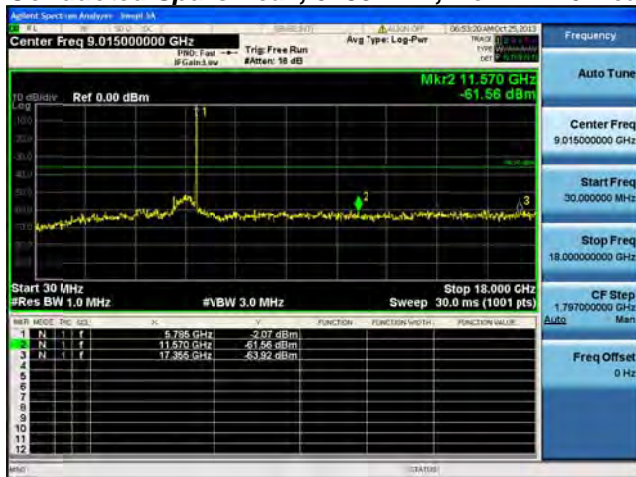
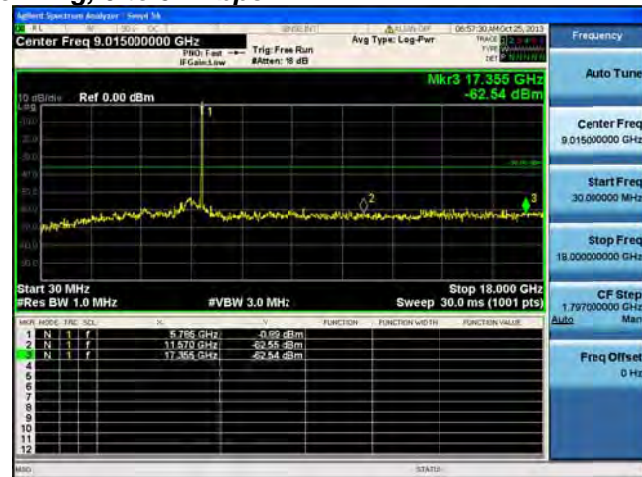
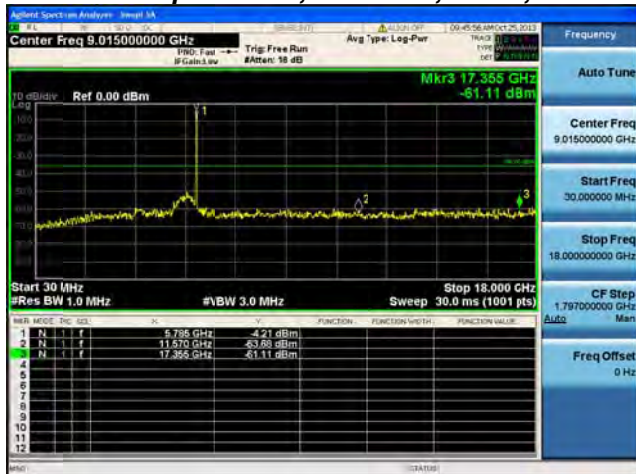
Conducted Spurs Peak, 5755 MHz, HT-40 STBC, M0 to M7

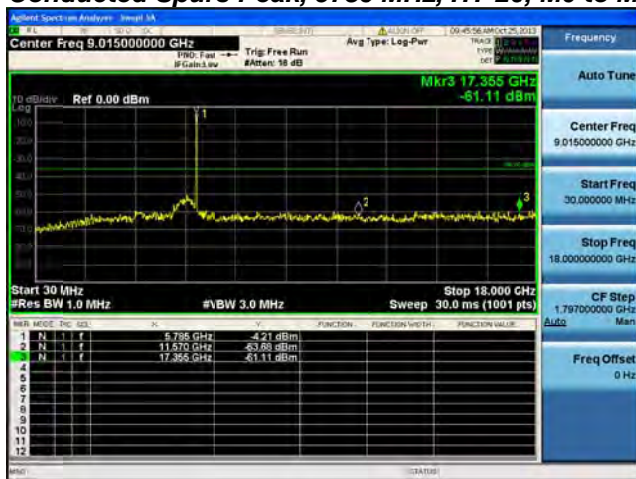
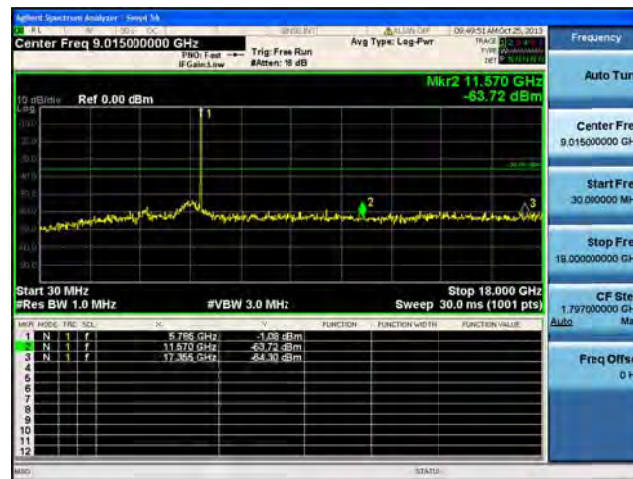
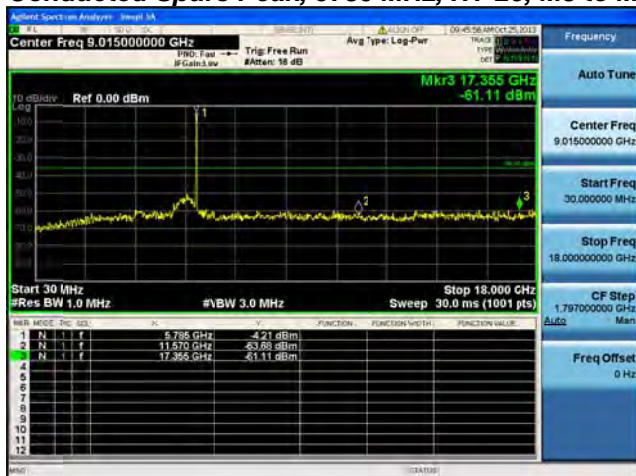
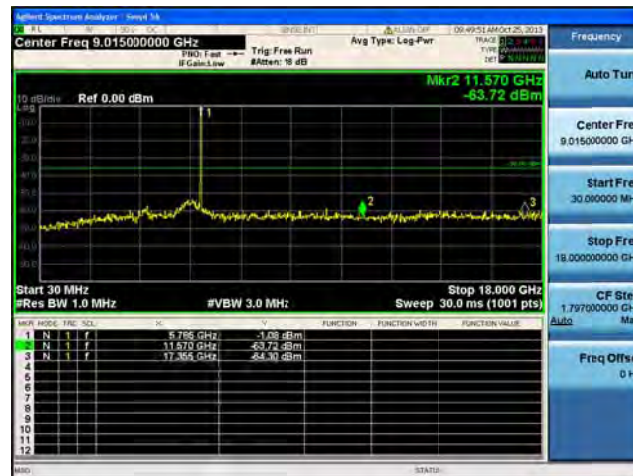
Antenna A

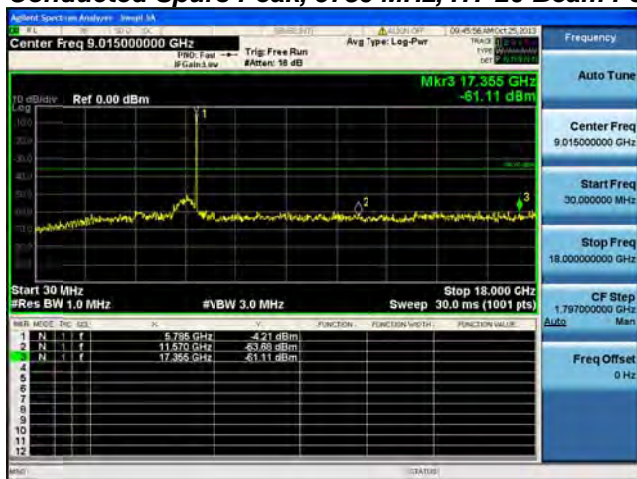


Antenna B

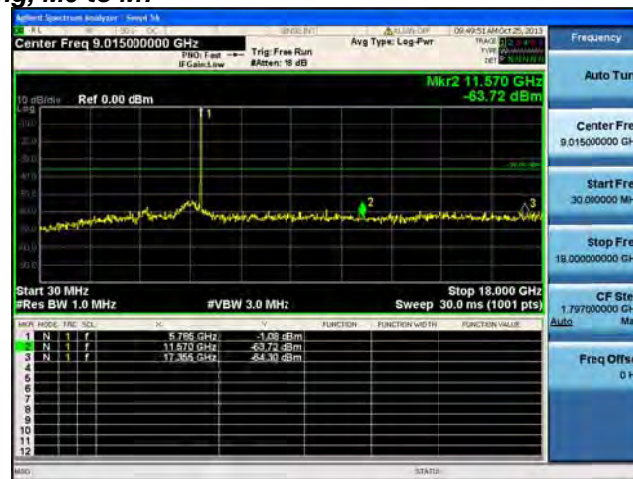
Conducted Spurs Peak, 5785 MHz, Non HT-20, 6 to 54 Mbps**Antenna A****Conducted Spurs Peak, 5785 MHz, Non HT-20, 6 to 54 Mbps****Antenna A****Antenna B**

Conducted Spurs Peak, 5785 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps**Antenna A****Antenna B****Conducted Spurs Peak, 5785 MHz, HT-20, M0 to M7****Antenna A**

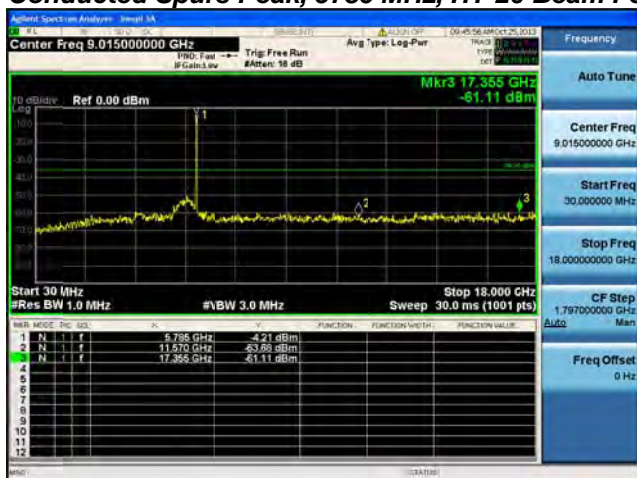
Conducted Spurs Peak, 5785 MHz, HT-20, M0 to M7**Antenna A****Antenna B****Conducted Spurs Peak, 5785 MHz, HT-20, M8 to M15****Antenna A****Antenna B**

Conducted Spurs Peak, 5785 MHz, HT-20 Beam Forming, M0 to M7

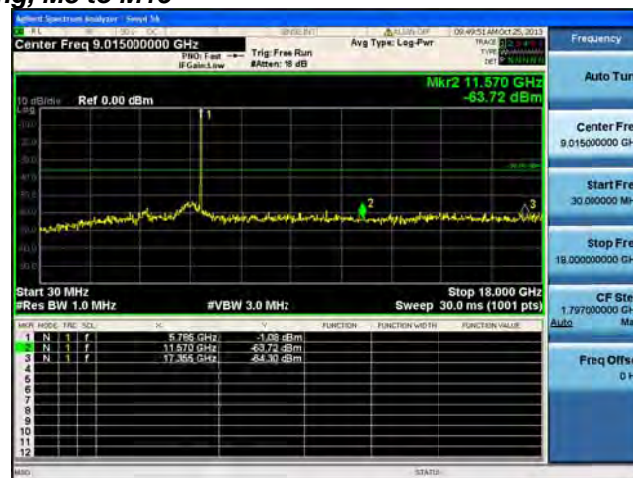
Antenna A



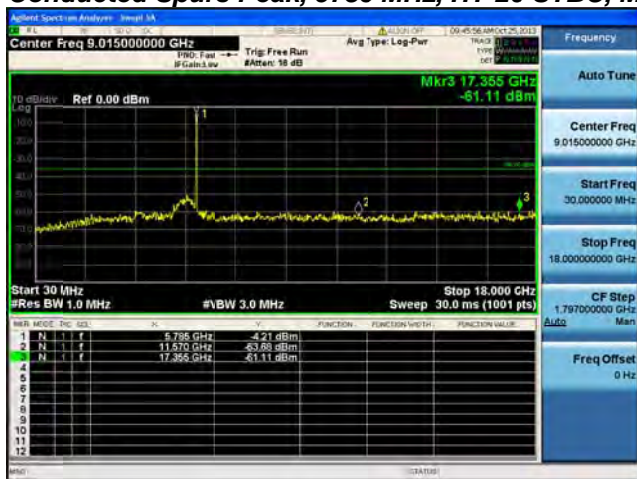
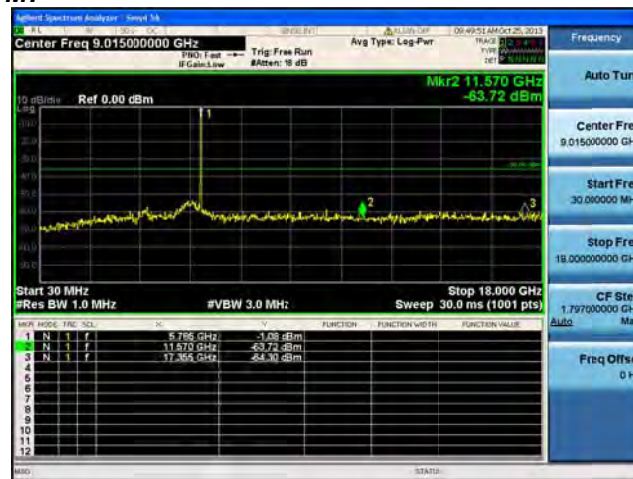
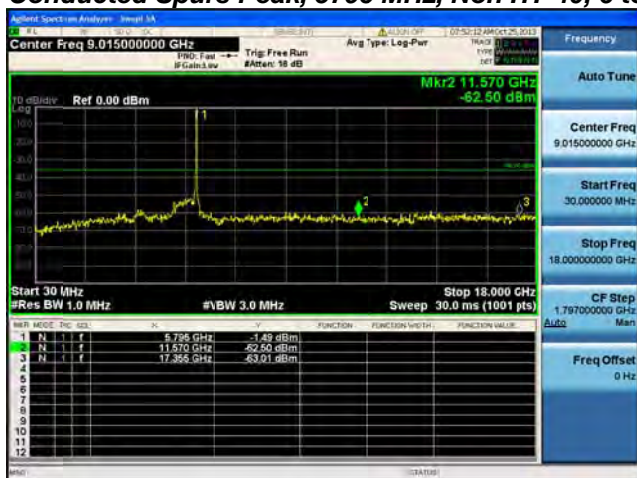
Antenna B

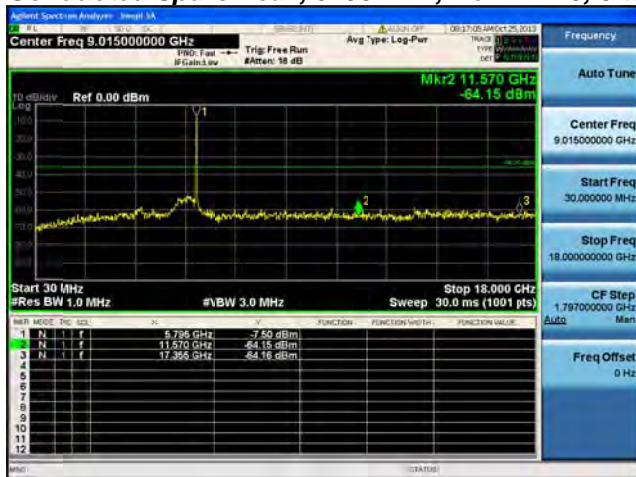
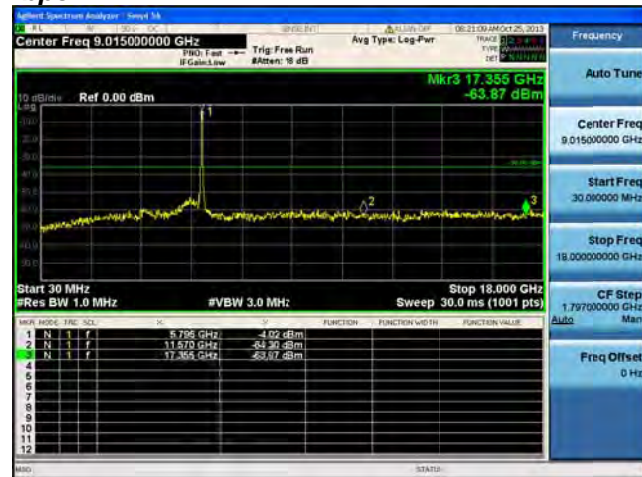
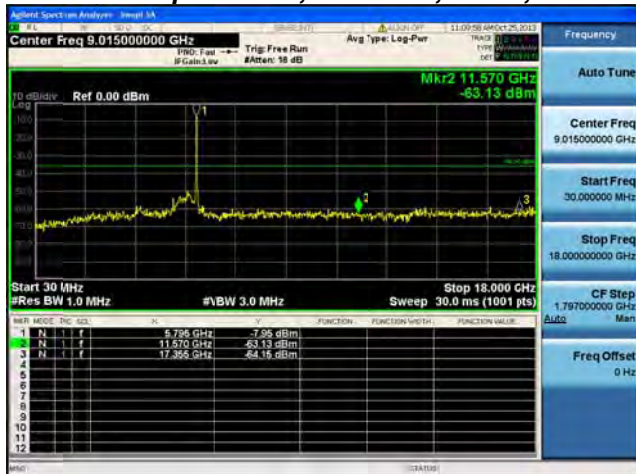
Conducted Spurs Peak, 5785 MHz, HT-20 Beam Forming, M8 to M15

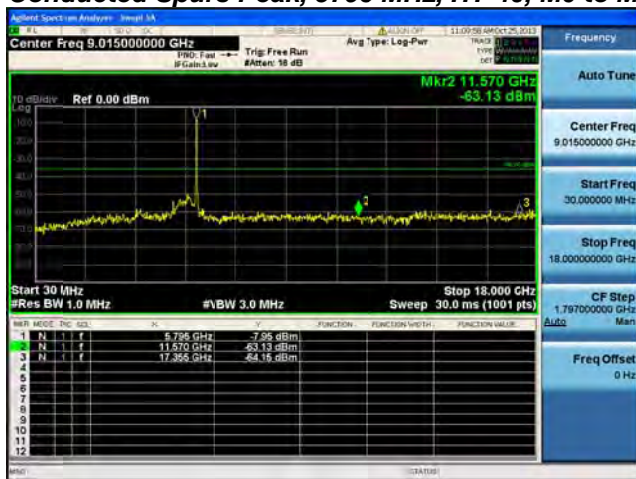
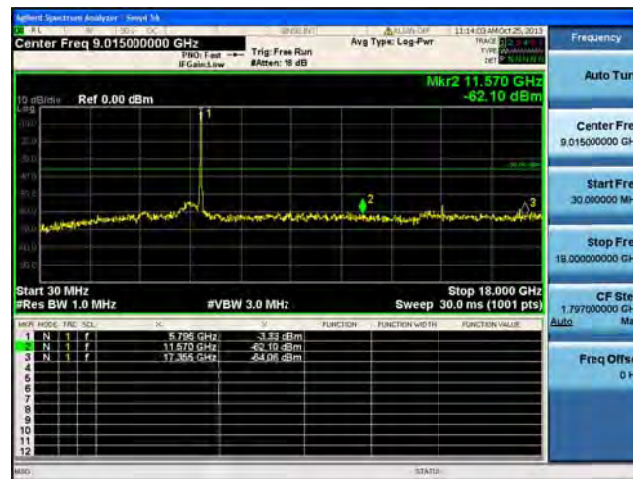
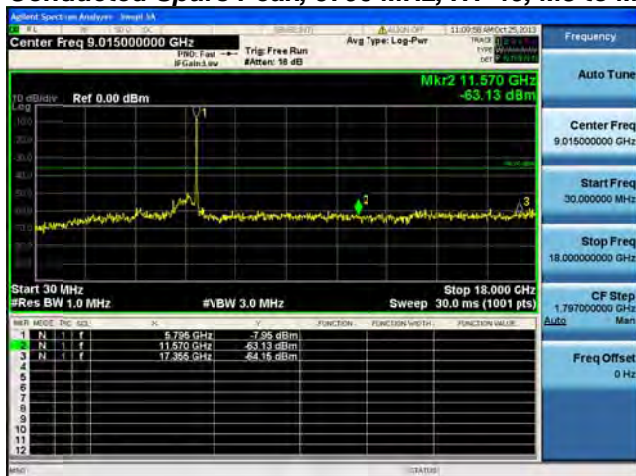
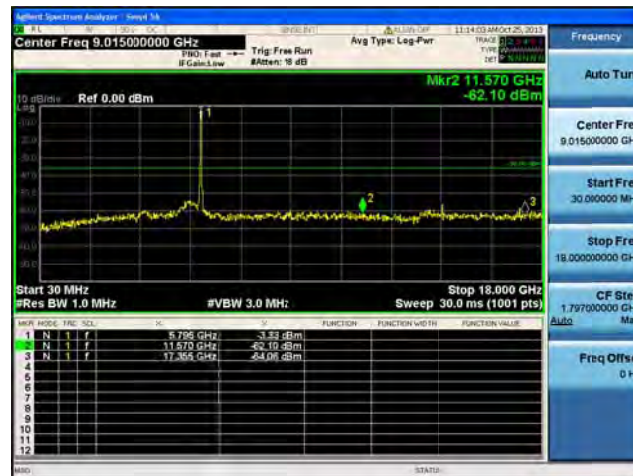
Antenna A

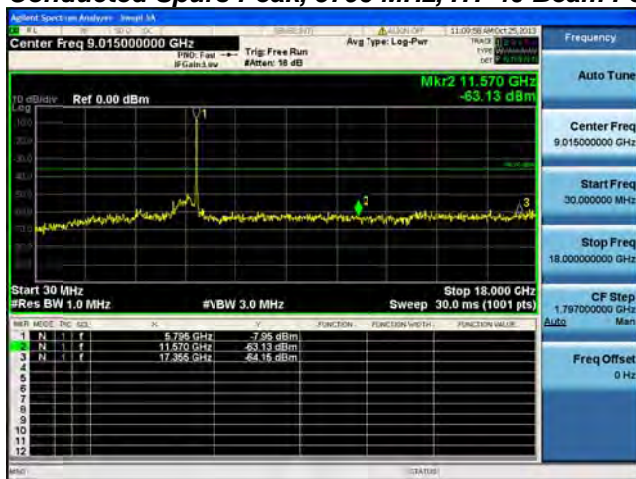


Antenna B

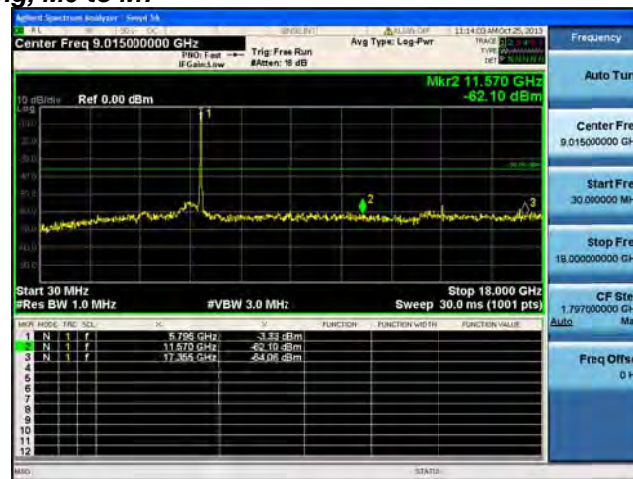
Conducted Spurs Peak, 5785 MHz, HT-20 STBC, M0 to M7**Antenna A****Antenna B****Conducted Spurs Peak, 5795 MHz, Non HT-40, 6 to 54 Mbps****Antenna A**

Conducted Spurs Peak, 5795 MHz, Non HT-40, 6 to 54 Mbps**Antenna A****Antenna B****Conducted Spurs Peak, 5795 MHz, HT-40, M0 to M7****Antenna A**

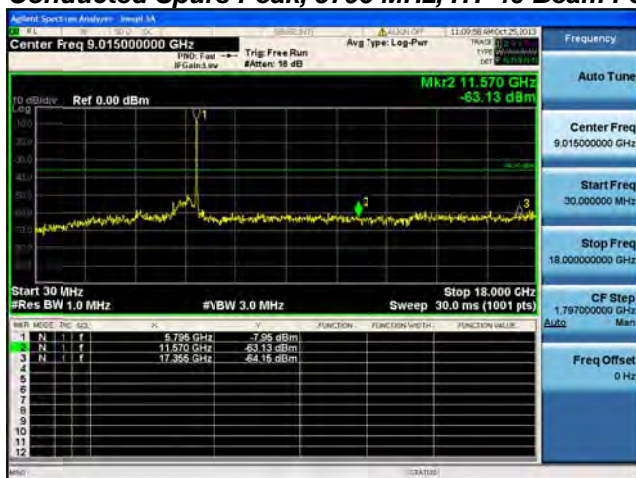
Conducted Spurs Peak, 5795 MHz, HT-40, M0 to M7**Antenna A****Antenna B****Conducted Spurs Peak, 5795 MHz, HT-40, M8 to M15****Antenna A****Antenna B**

Conducted Spurs Peak, 5795 MHz, HT-40 Beam Forming, M0 to M7

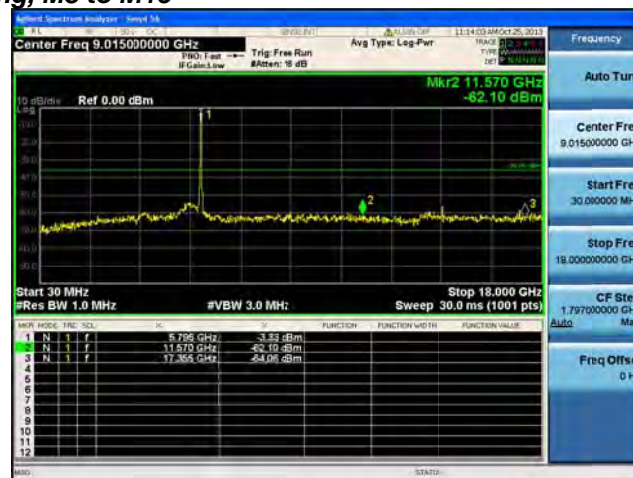
Antenna A



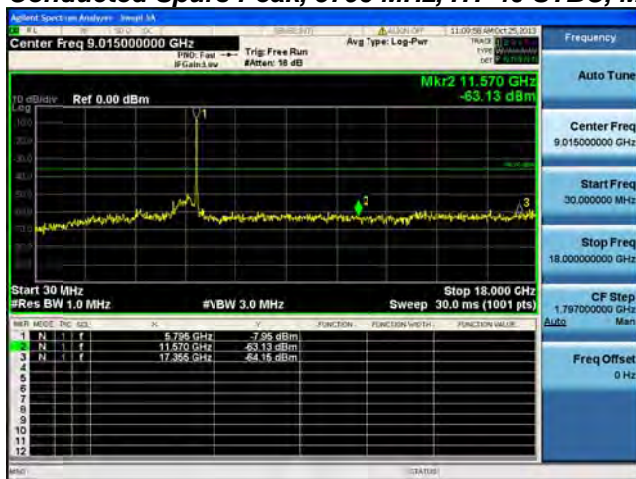
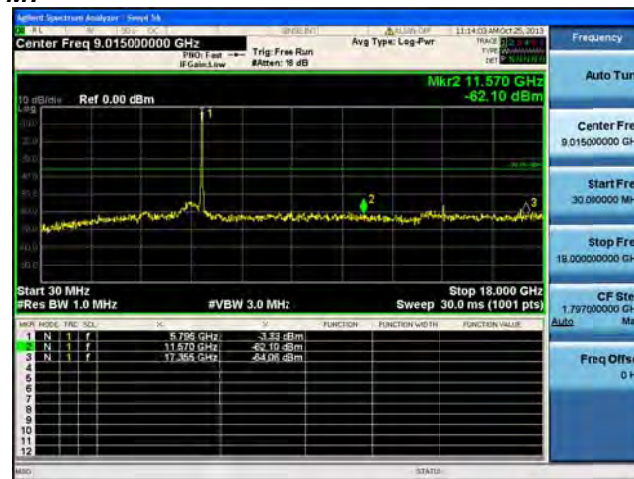
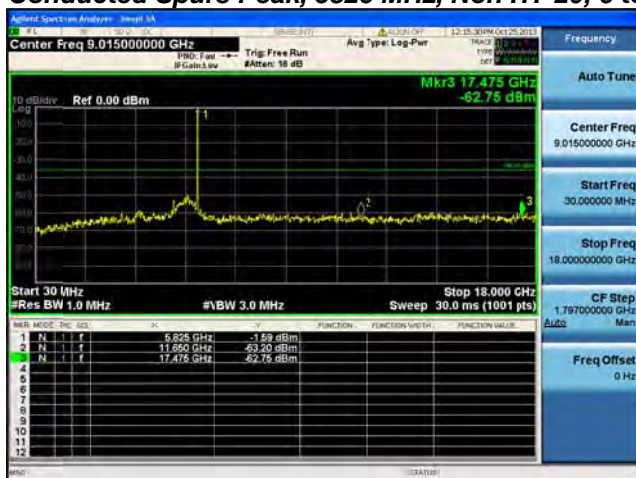
Antenna B

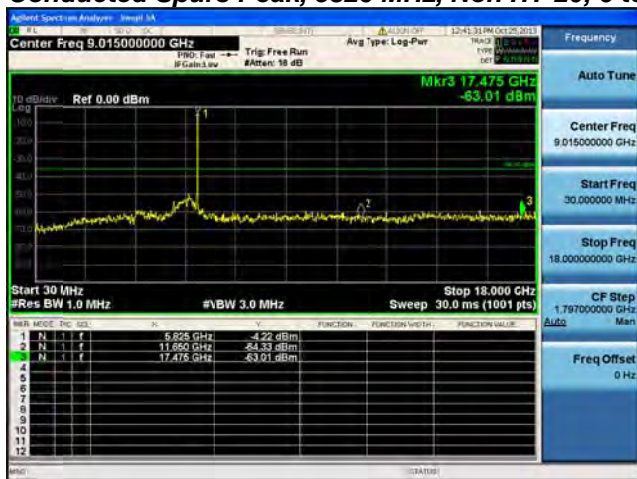
Conducted Spurs Peak, 5795 MHz, HT-40 Beam Forming, M8 to M15

Antenna A

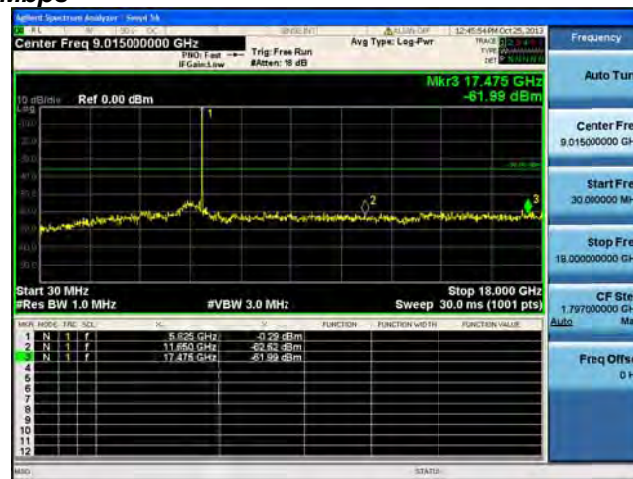


Antenna B

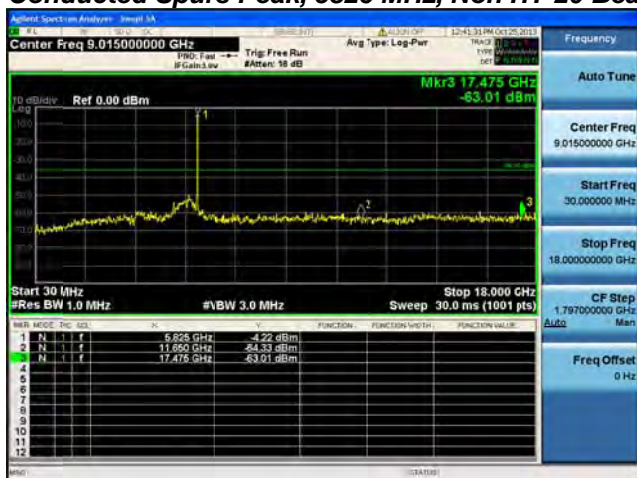
Conducted Spurs Peak, 5795 MHz, HT-40 STBC, M0 to M7**Antenna A****Antenna B****Conducted Spurs Peak, 5825 MHz, Non HT-20, 6 to 54 Mbps****Antenna A**

Conducted Spurs Peak, 5825 MHz, Non HT-20, 6 to 54 Mbps

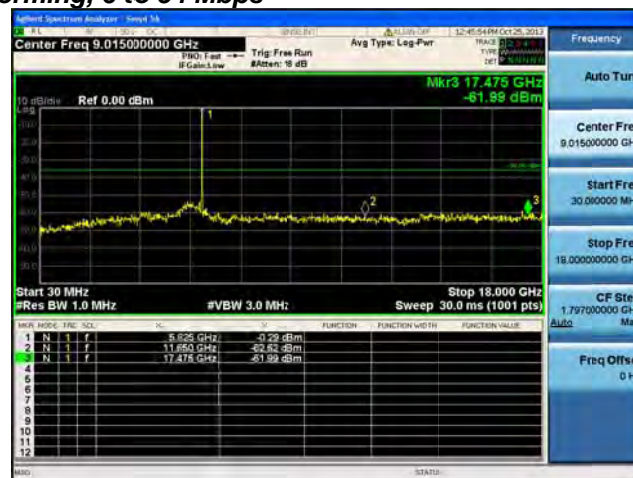
Antenna A



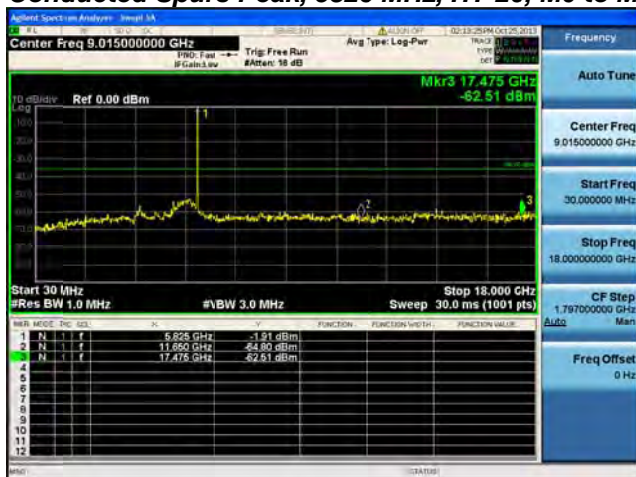
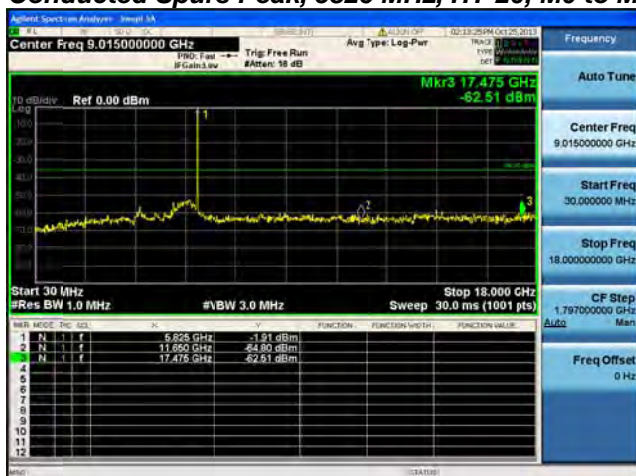
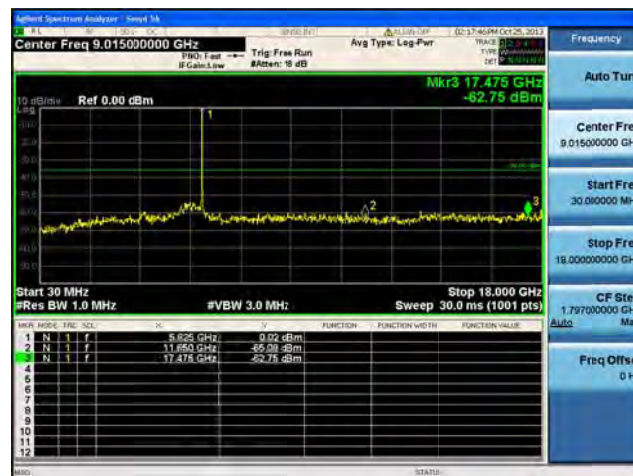
Antenna B

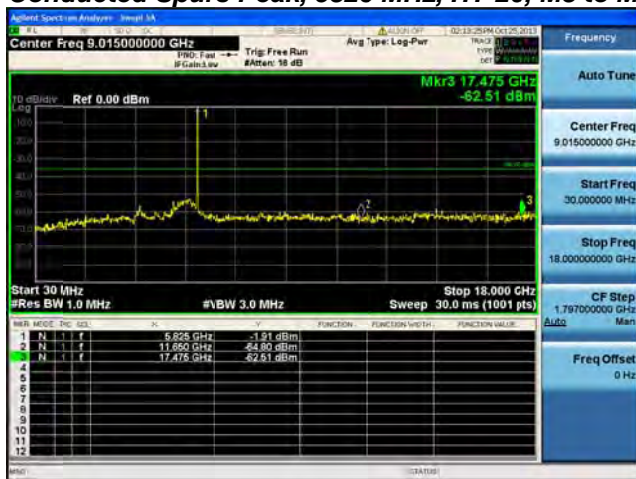
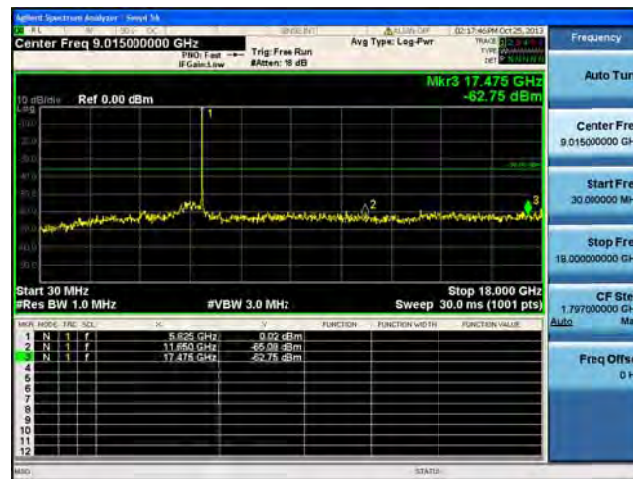
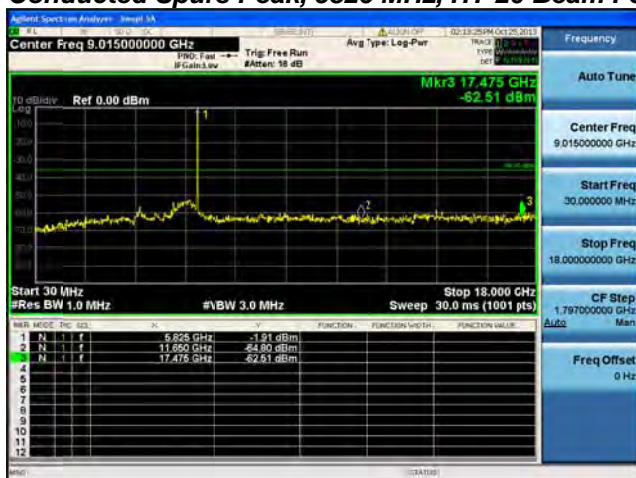
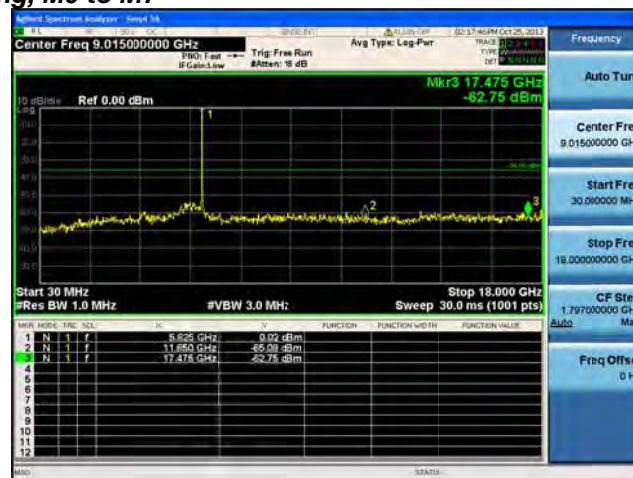
Conducted Spurs Peak, 5825 MHz, Non HT-20 Beam Forming, 6 to 54 Mbps

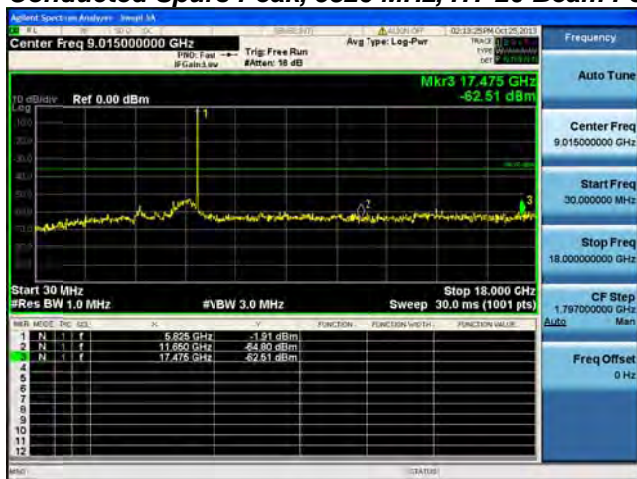
Antenna A



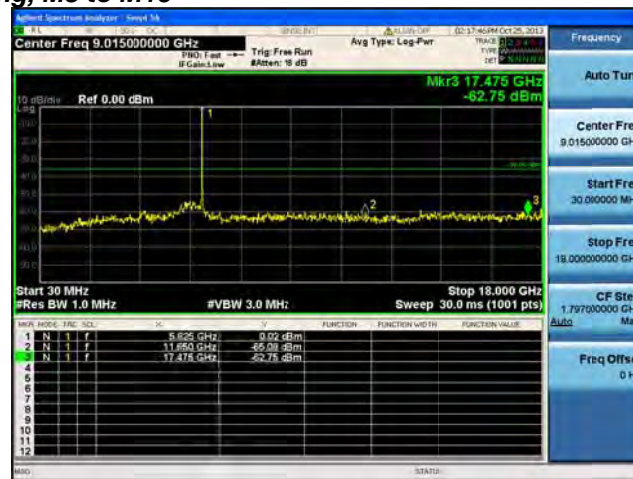
Antenna B

Conducted Spurs Peak, 5825 MHz, HT-20, M0 to M7**Antenna A****Conducted Spurs Peak, 5825 MHz, HT-20, M0 to M7****Antenna A****Antenna B**

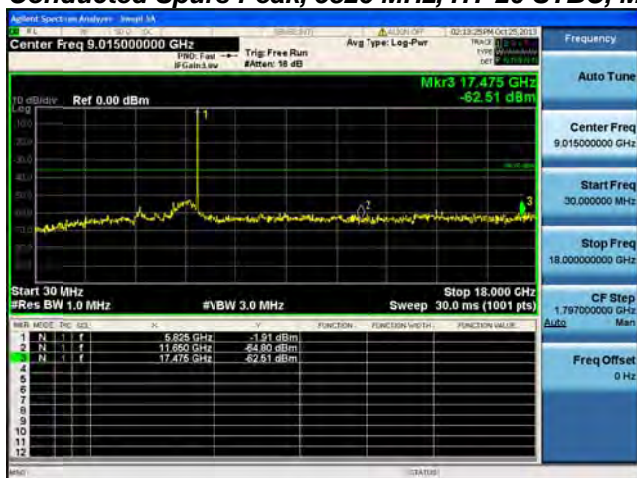
Conducted Spurs Peak, 5825 MHz, HT-20, M8 to M15**Antenna A****Antenna B****Conducted Spurs Peak, 5825 MHz, HT-20 Beam Forming, M0 to M7****Antenna A****Antenna B**

Conducted Spurs Peak, 5825 MHz, HT-20 Beam Forming, M8 to M15

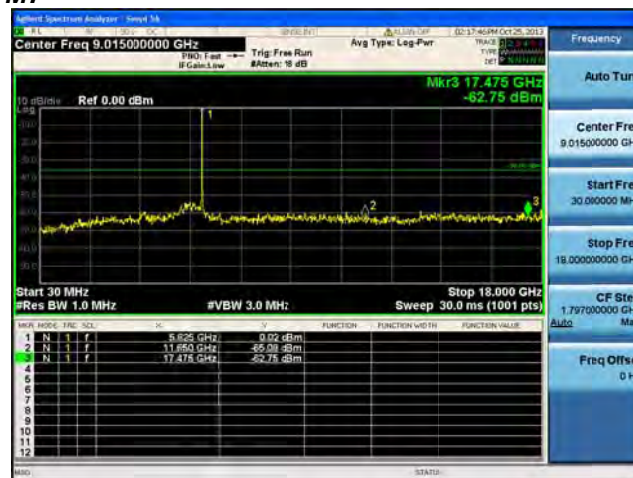
Antenna A



Antenna B

Conducted Spurs Peak, 5825 MHz, HT-20 STBC, M0 to M7

Antenna A



Antenna B



Conducted Bandedge

15.247: In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

Span:	30 MHz-26 GHz
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	300 kHz
Detector:	Peak
Trace:	Single
Marker:	Peak

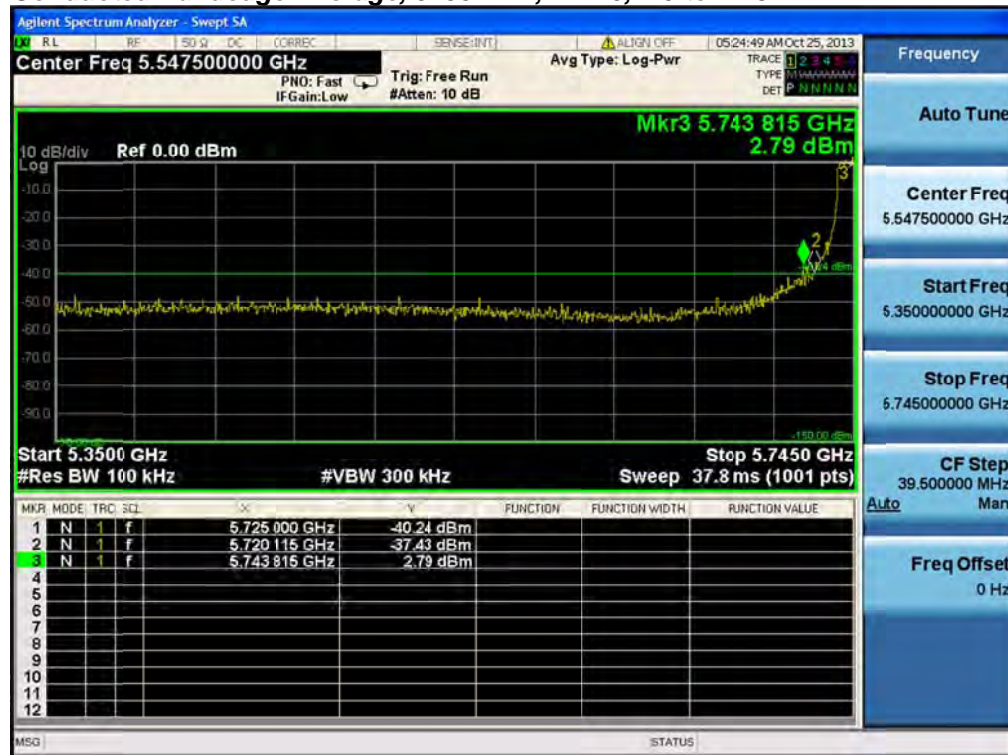
Record the marker waveform peak to spur difference

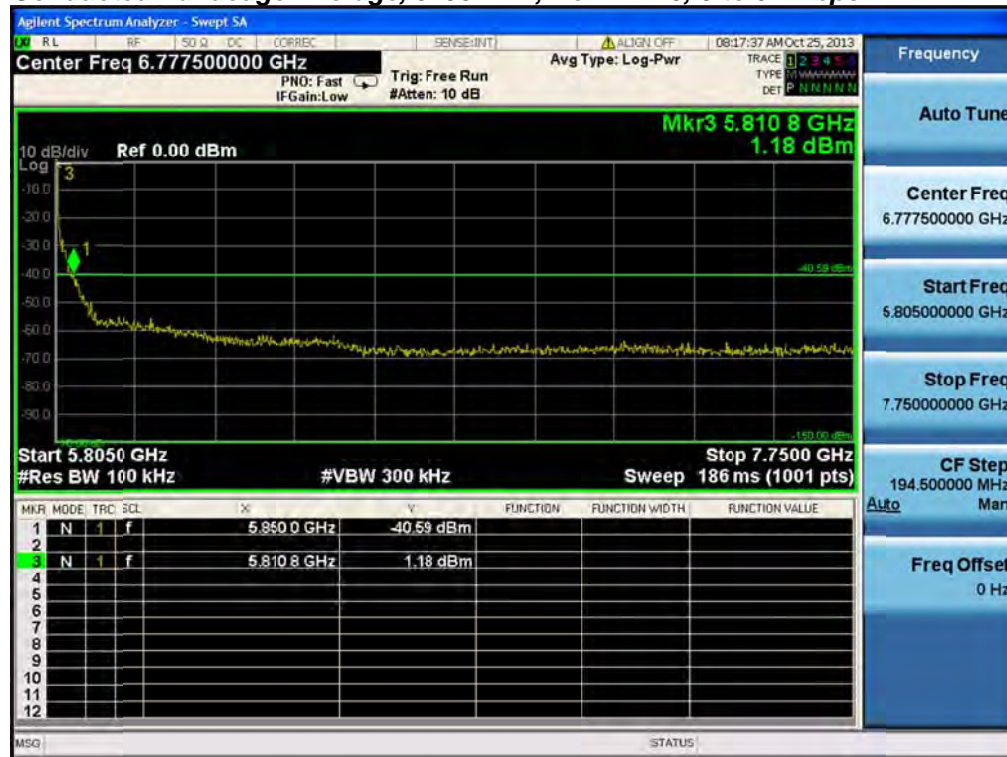
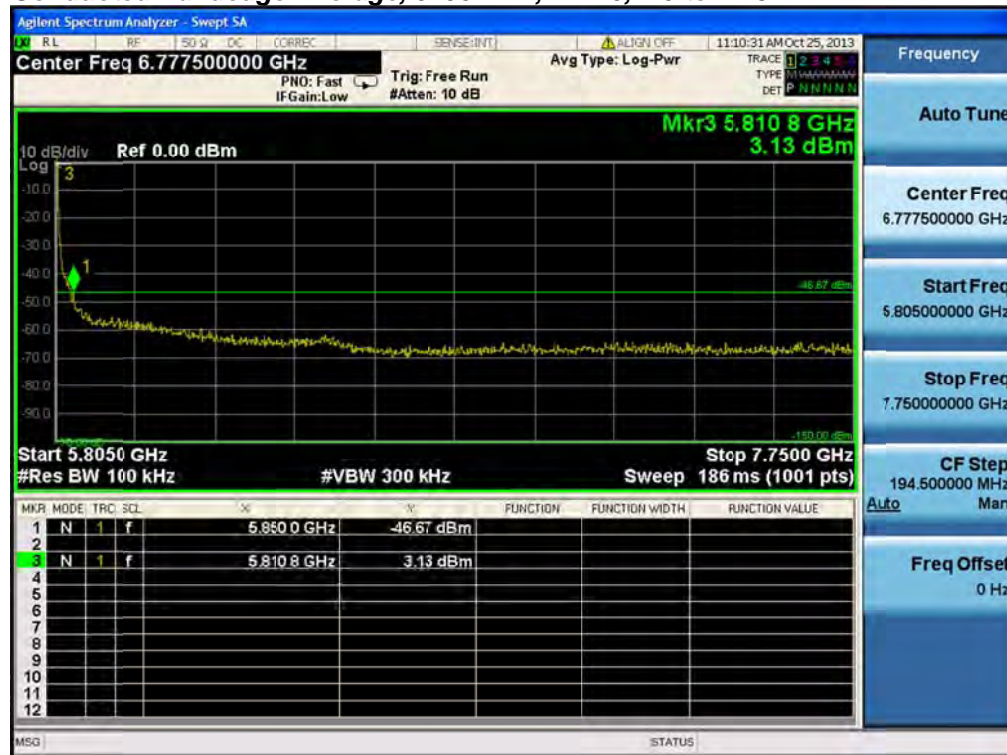
Out-of-band and spurious emissions tests are performed on each output individually without summing or adding 10 log(N) since the measurements are made relative to the in-band emissions on the individual outputs. The worst case output is recorded.

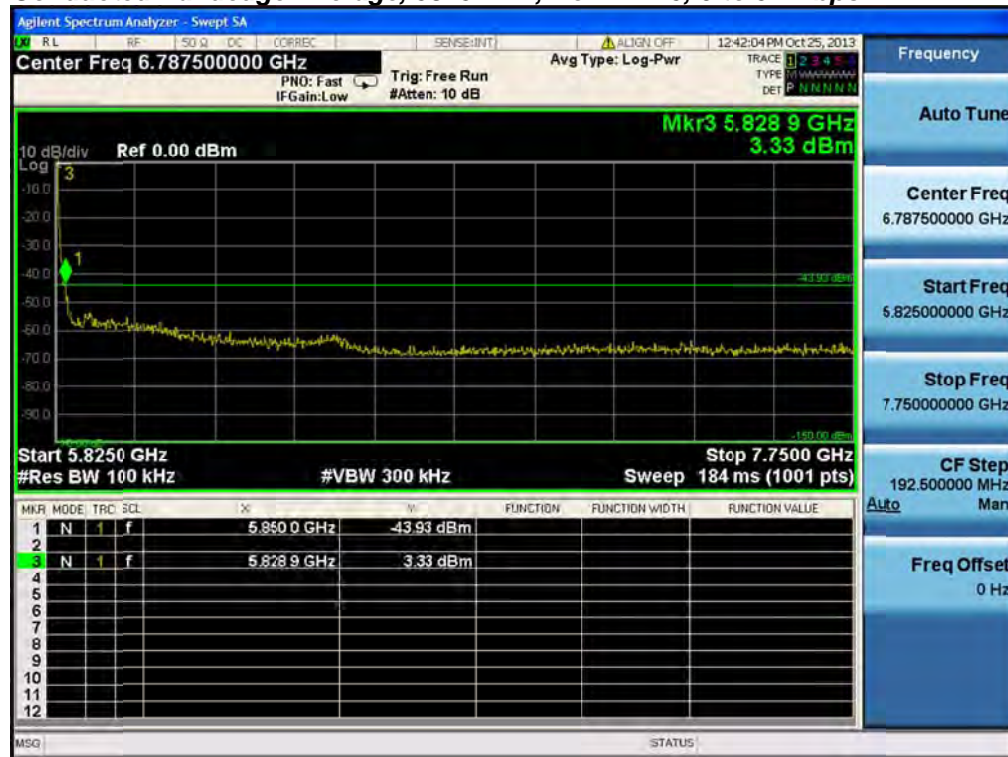
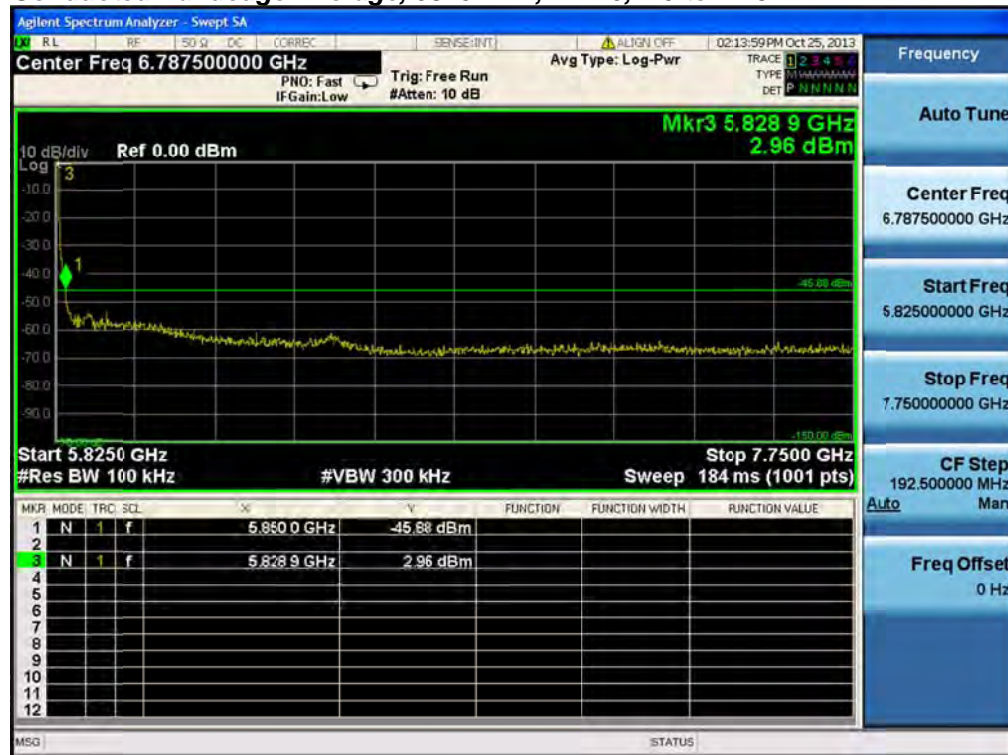


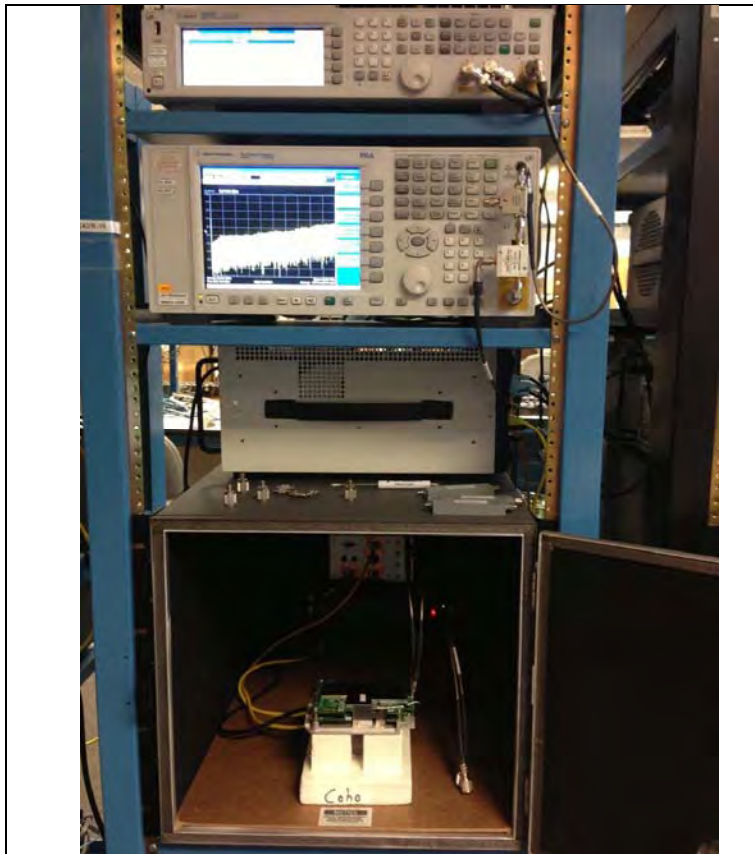
Frequency (MHz)	Mode	Tx Paths	Conducted Bandedge Delta (dB)	Limit (dB c)	Margin (dB)
5745	Non HT-20, 6 to 54 Mbps	6	48.2	>30	18.2
	HT-20, M0 to M23	m0	44.3	>30	14.3
5755	Non HT-40, 6 to 54 Mbps	6	35.9	>30	5.9
	HT-40, M0 to M23	m0	40.2	>30	10.2
5795	Non HT-40, 6 to 54 Mbps	6	41.8	>30	11.8
	HT-40, M0 to M23	m0	49.8	>30	19.8
5825	Non HT-20, 6 to 54 Mbps	6	47.3	>30	17.3
	HT-20, M0 to M23	m0	48.8	>30	18.8

[illegible][illegible]

Conducted Bandedge Average, 5755 MHz, Non HT-40, 6 to 54 Mbps**Conducted Bandedge Average, 5755 MHz, HT-40, M0 to M23**

**Conducted Bandedge Average, 5795 MHz, Non HT-40, 6 to 54 Mbps****Conducted Bandedge Average, 5795 MHz, HT-40, M0 to M23**

**Conducted Bandedge Average, 5825 MHz, Non HT-20, 6 to 54 Mbps****Conducted Bandedge Average, 5825 MHz, HT-20, M0 to M23**



Title: Conducted Test Setup

**Appendix B: Emission Test Results**

Testing Laboratory: Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA

Radiated Spurious Emissions

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	1GHz – 18 GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	1 MHz for peak, 10 Hz for average
Detector:	Peak

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

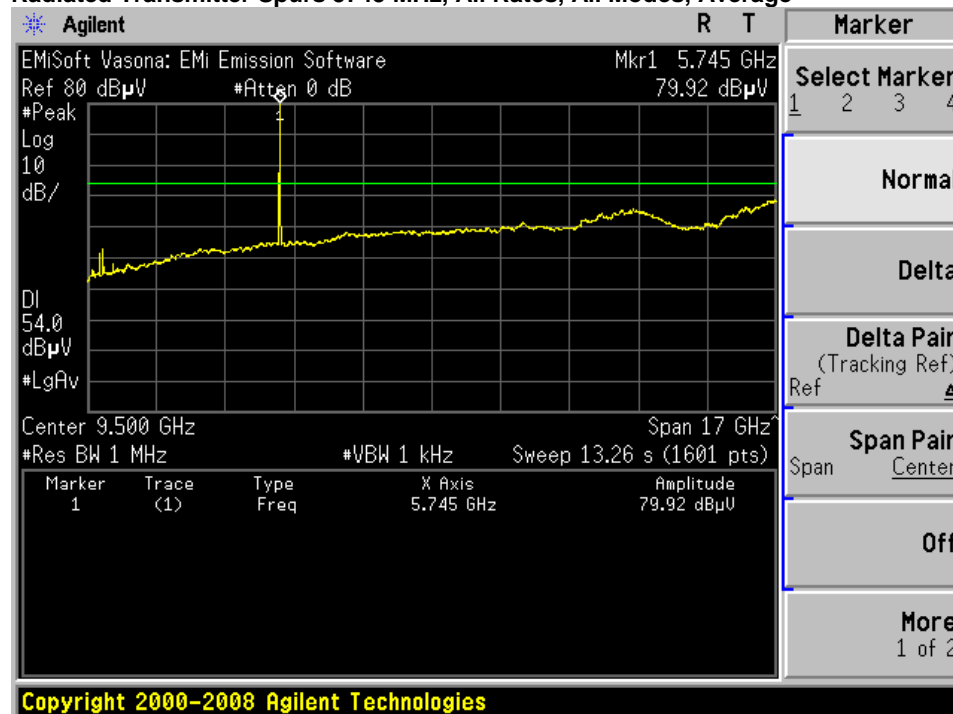
Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV @3m
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
Also measure any emissions in the restricted bands.

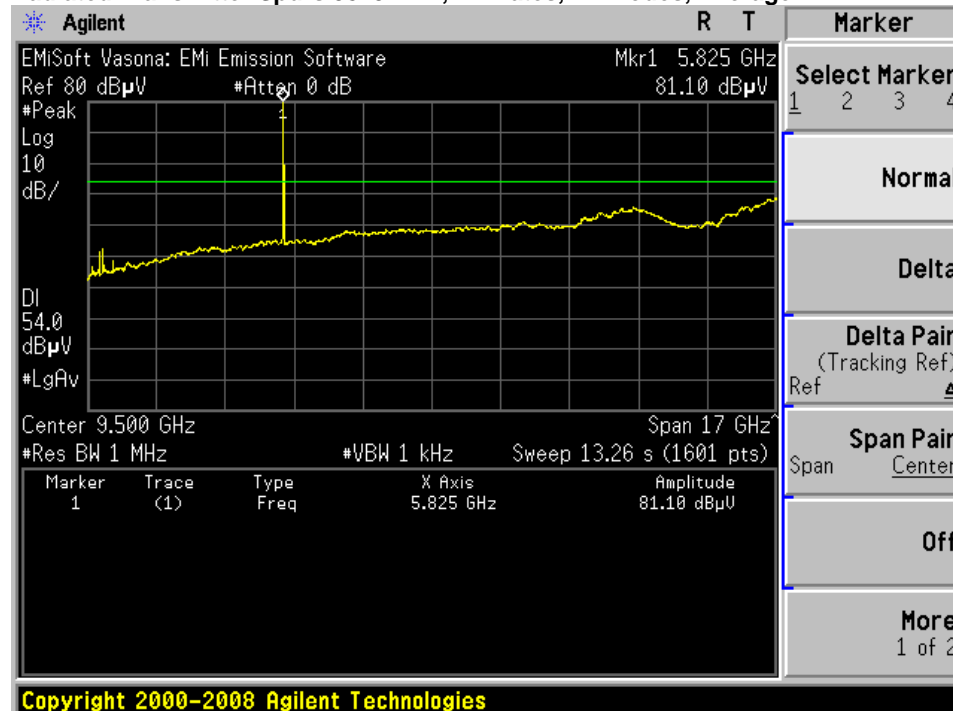
This report represents the worst case data for all supported operating modes and antennas. There are no measurable emissions above 18 GHz.

Transmitter Radiated Spurious Emissions

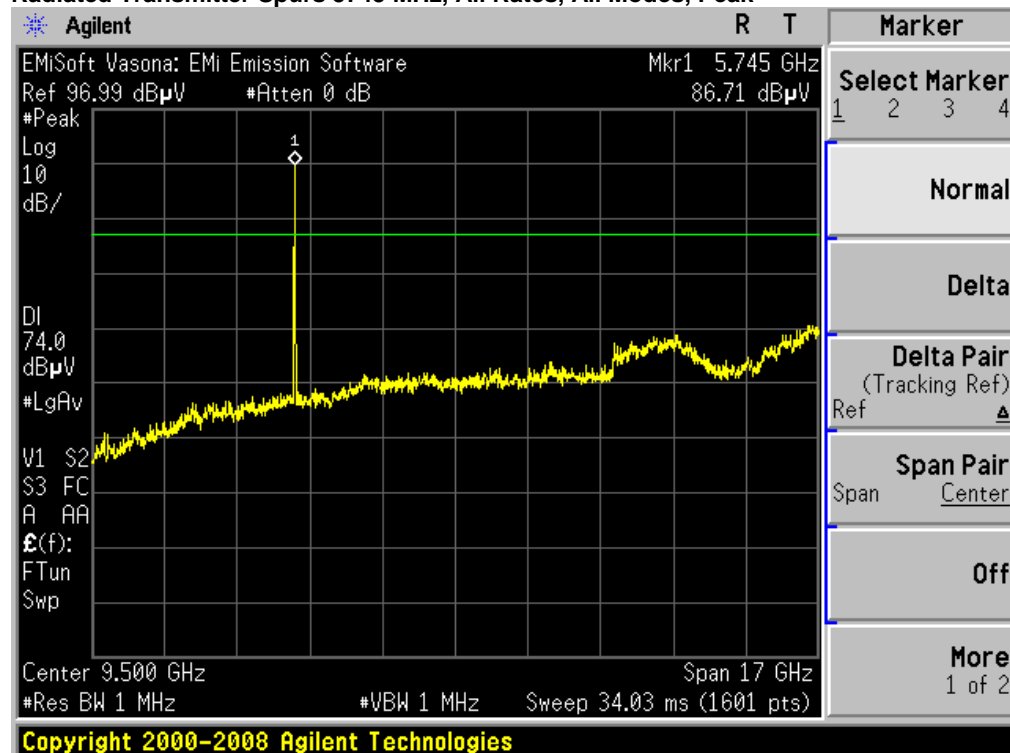
Radiated Transmitter Spurs 5745 MHz, All Rates, All Modes, Average



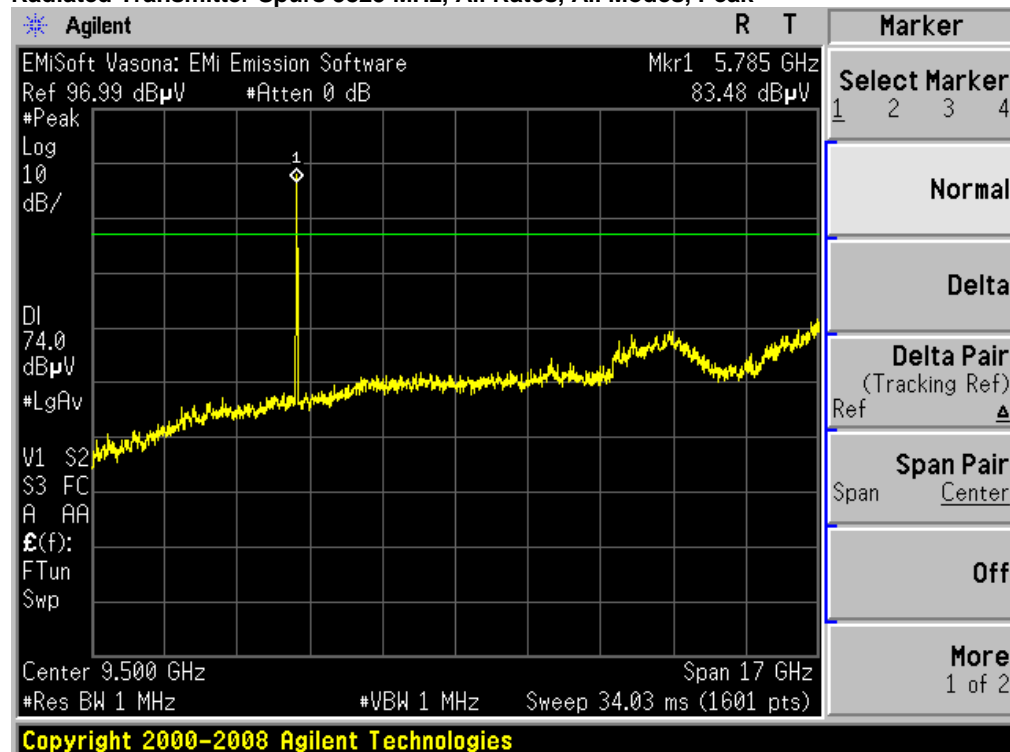
Radiated Transmitter Spurs 5825 MHz, All Rates, All Modes, Average



Radiated Transmitter Spurs 5745 MHz, All Rates, All Modes, Peak



Radiated Transmitter Spurs 5825 MHz, All Rates, All Modes, Peak

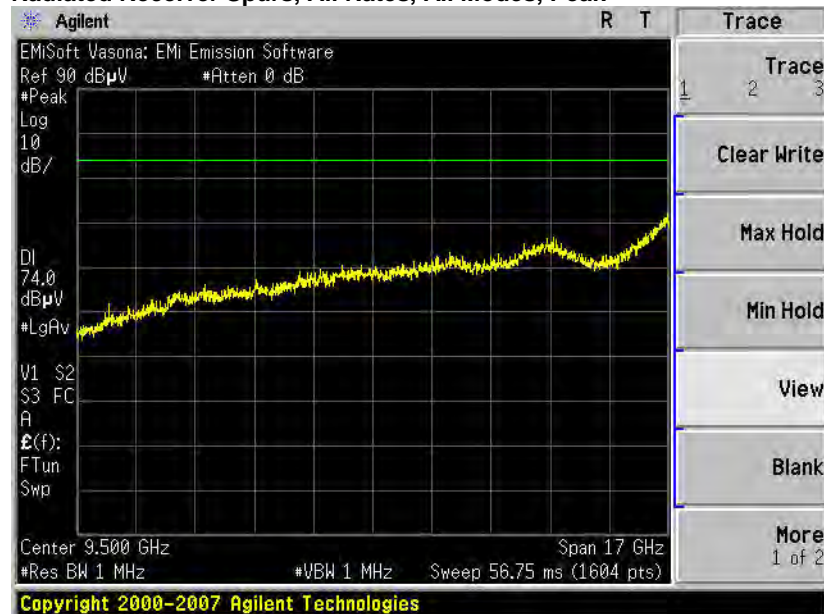


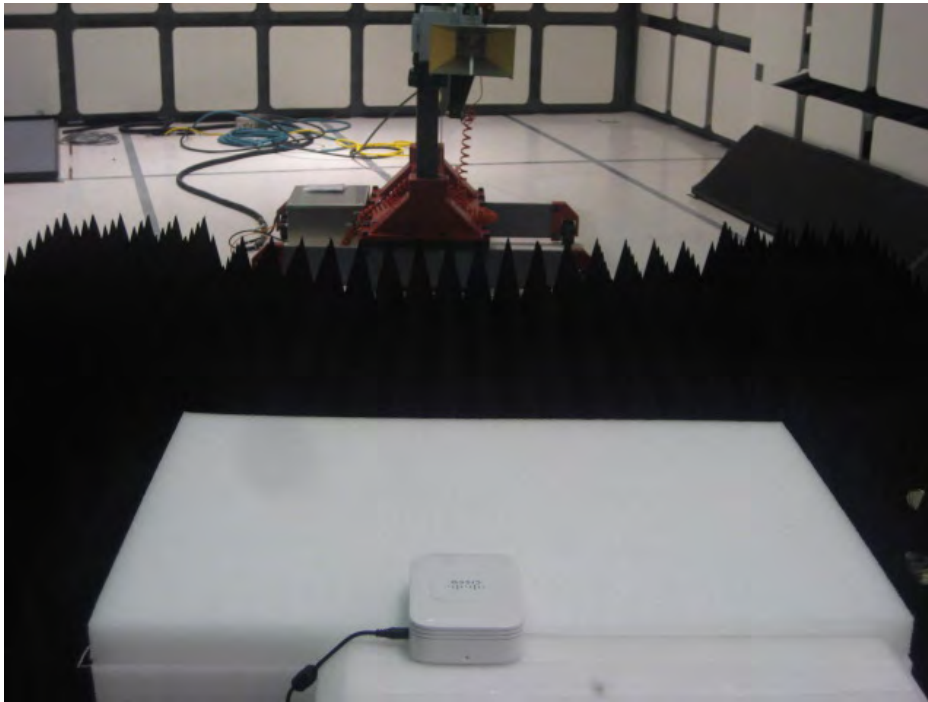
Receiver Radiated Spurious Emissions

Radiated Receiver Spurs, All Rates, All Modes, Average



Radiated Receiver Spurs, All Rates, All Modes, Peak





Radiated Test Setup



Maximum Permissible Exposure (MPE) Calculations

15.247: U-NII devices are subject to the radio frequency radiation exposure requirements specified in Sec. 1.1307(b), Sec. 2.1091 and Sec. 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

Given

$$E = \sqrt{(30 \cdot P \cdot G)/d} \quad \text{and} \quad S = E^2/3770$$

where

E=Field Strength in Volts/meter

P=Power in Watts

G=Numeric Antenna Gain

d=Distance in meters

S=Power Density in mW/cm²

Combine equations and rearrange the terms to express the distance as a function of the remaining variables:

$$d = \sqrt{((30 \cdot P \cdot G)/(3770 \cdot S))}$$

Changing to units of power in mW and distance in cm, using:

$$P(\text{mW}) = P(\text{W})/1000 \quad d(\text{cm}) = 100 \cdot d(\text{m})$$

yields

$$d = 100 \cdot \sqrt{((30 \cdot (P/1000) \cdot G)/(3770 \cdot S))}$$

$$d = 0.282 \cdot \sqrt{(P \cdot G/S)}$$

where

d=Distance in cm

P=Power in mW

G=Numeric Antenna Gain

S=Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P(\text{mW}) = 10^{(P(\text{dBm})/10)} \quad G(\text{numeric}) = 10^{(G(\text{dBi})/10)}$$

yields

$$d = 0.282 \cdot 10^{((P+G)/20)/\sqrt{S}} \quad \text{Equation (1)}$$

and

$$s = ((0.282 \cdot 10^{((P+G)/20)})/d)^2 \quad \text{Equation (2)}$$

where

d=MPE distance in cm

P=Power in dBm

G=Antenna Gain in dBi

S=Power Density in mW/cm²



Equation (1) and the measured peak power are used to calculate the MPE distance. Note that for mobile or fixed location transmitters such as an access point, the minimum separation distance is 20 cm even if the calculations indicate that the MPE distance may be less.

$S=1\text{mW/cm}^2$ maximum. The highest supported antenna gain is 4 dBi (7dBi with beamforming). Using the peak power levels recorded in the test report along with Equation 1 above, the MPE distances are calculated as follows.

MPE Calculations:

Frequency (MHz)	Power Density (mW/cm ²)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)	Limit (cm)	Margin (cm)
5745	1	20.6	7	6.76	20	13.24
5785	1	20.3	7	6.54	20	13.46

To maintain compliance, installations will assure a separation distance of at least 20cm.

Using Equation 2, the MPE levels (s) at 20 cm are calculated as follows:

Frequency (MHz)	MPE Distance (cm)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm ²)	Limit (mW/cm ²)	Margin (mW/cm ²)
5745	20	20.6	7	0.11	1	0.89
5785	20	20.3	7	0.11	1	0.89



Appendix C: Test Equipment/Software Used to perform the test

Equip #	Manufacturer	Model	Description	Last Cal	Next Due
CIS-50378	Agilent	N9030A	PXA Spectrum Analyzer	2/27/2013	2/27/2014