



# Above 1GHz Test Setup:

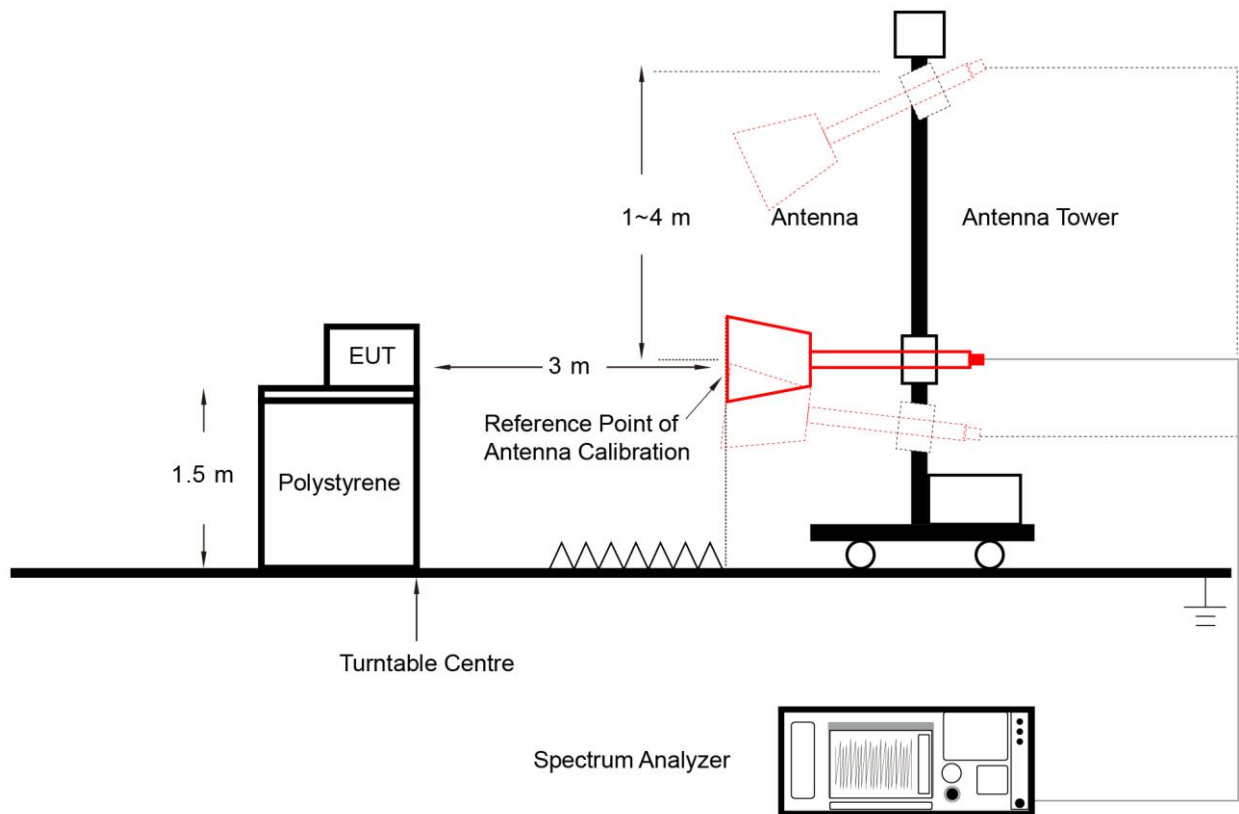

### 6.8.5. Test Result

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-07    |
| Factor    | VULB 9162                                   | Temp. / Humidity     | 20°C / 62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_Band5_TX_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz  |

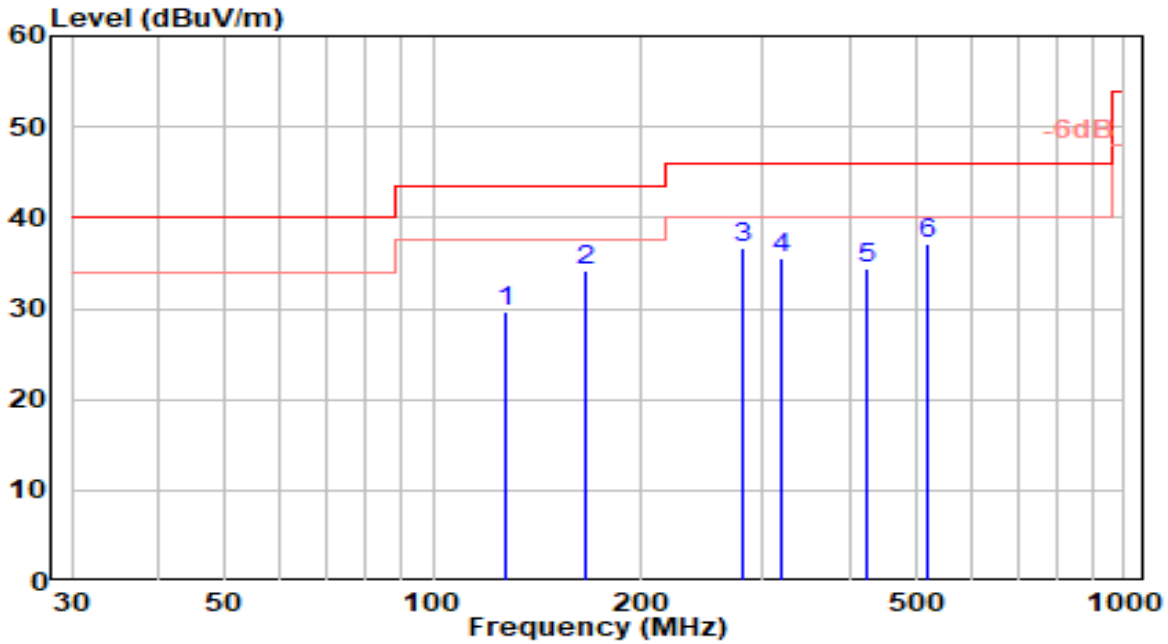


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 127.160         | 13.58          | 16.14      | 29.72                | -13.78      | 43.50          | 200         | 45          | QP                |
| 2  | 166.370         | 18.14          | 15.95      | 34.08                | -9.42       | 43.50          | 150         | 23          | QP                |
| 3  | 279.940         | 16.18          | 20.41      | 36.59                | -9.41       | 46.00          | 100         | 248         | QP                |
| 4  | 319.930         | 13.94          | 21.61      | 35.55                | -10.45      | 46.00          | 200         | 84          | QP                |
| 5  | 423.680         | 10.58          | 23.72      | 34.31                | -11.70      | 46.00          | 150         | 84          | QP                |
| 6  | * 517.030       | 11.64          | 25.46      | 37.10                | -8.90       | 46.00          | 200         | 118         | QP                |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-07    |
| Factor    | VULB 9162                                   | Temp. / Humidity     | 20°C / 62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_Band5_TX_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz  |

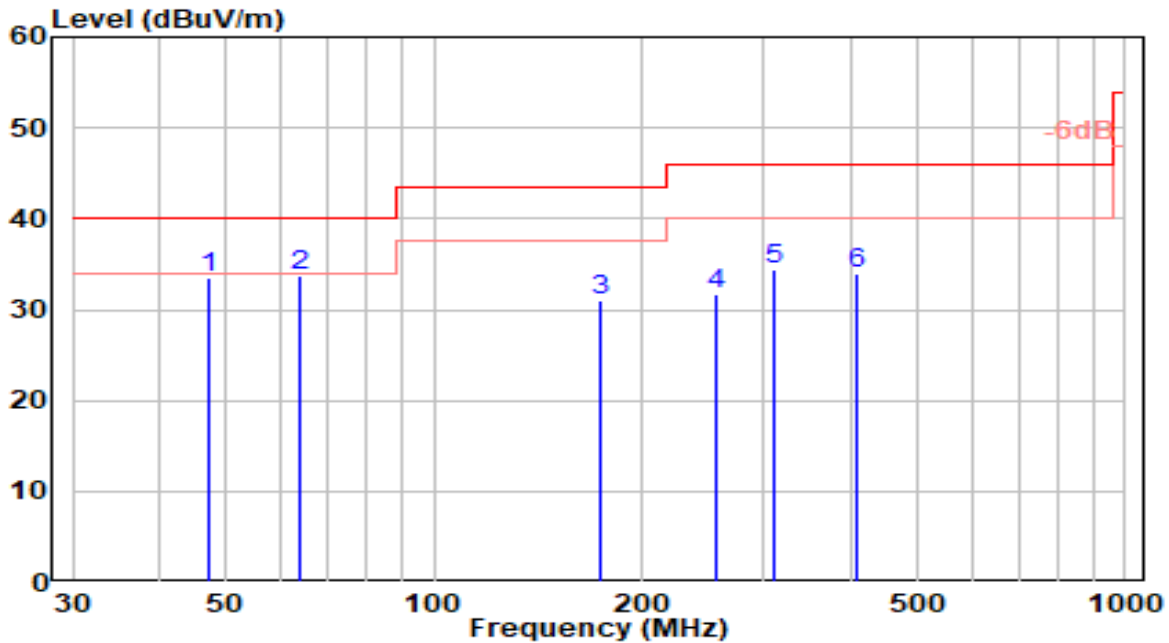


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 47.070          | 12.55          | 20.91      | 33.45                | -6.55       | 40.00          | 200         | 63          | QP                |
| 2  | * 63.670        | 15.43          | 18.24      | 33.67                | -6.33       | 40.00          | 100         | 317         | QP                |
| 3  | 173.530         | 14.86          | 16.22      | 31.08                | -12.42      | 43.50          | 100         | 345         | QP                |
| 4  | 255.940         | 11.44          | 20.30      | 31.75                | -14.25      | 46.00          | 200         | 63          | QP                |
| 5  | 311.590         | 13.03          | 21.30      | 34.33                | -11.67      | 46.00          | 200         | 87          | QP                |
| 6  | 407.490         | 10.37          | 23.60      | 33.97                | -12.03      | 46.00          | 200         | 45          | QP                |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

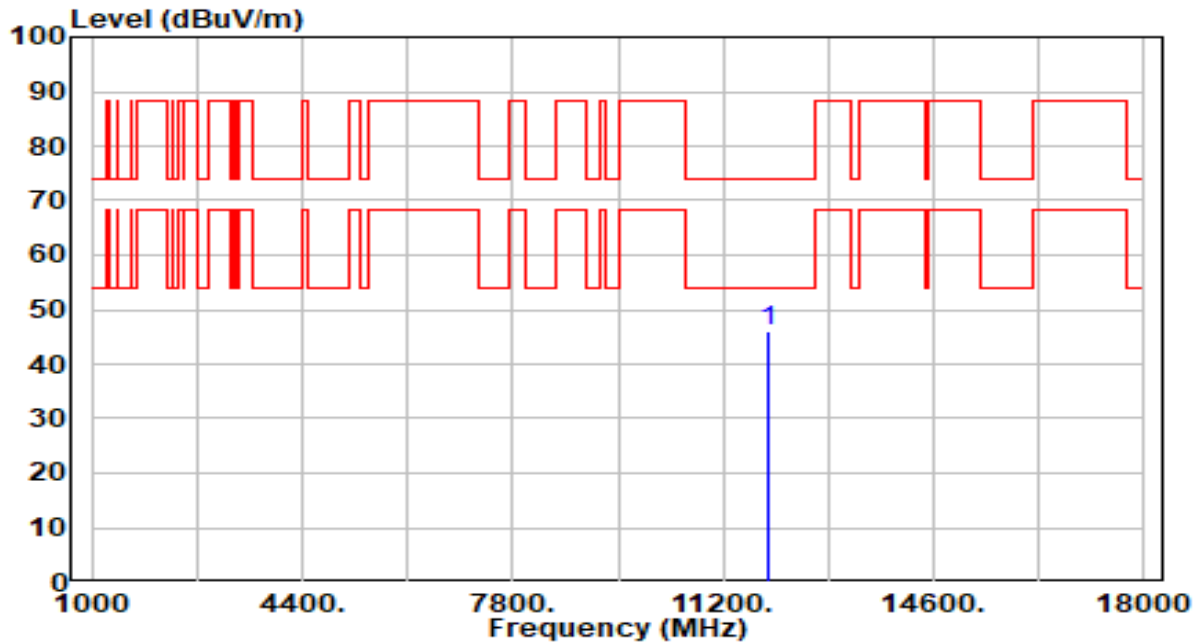


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 11910.000     | 42.44          | 3.78       | 46.21                | -27.79      | 74.00          | 253         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

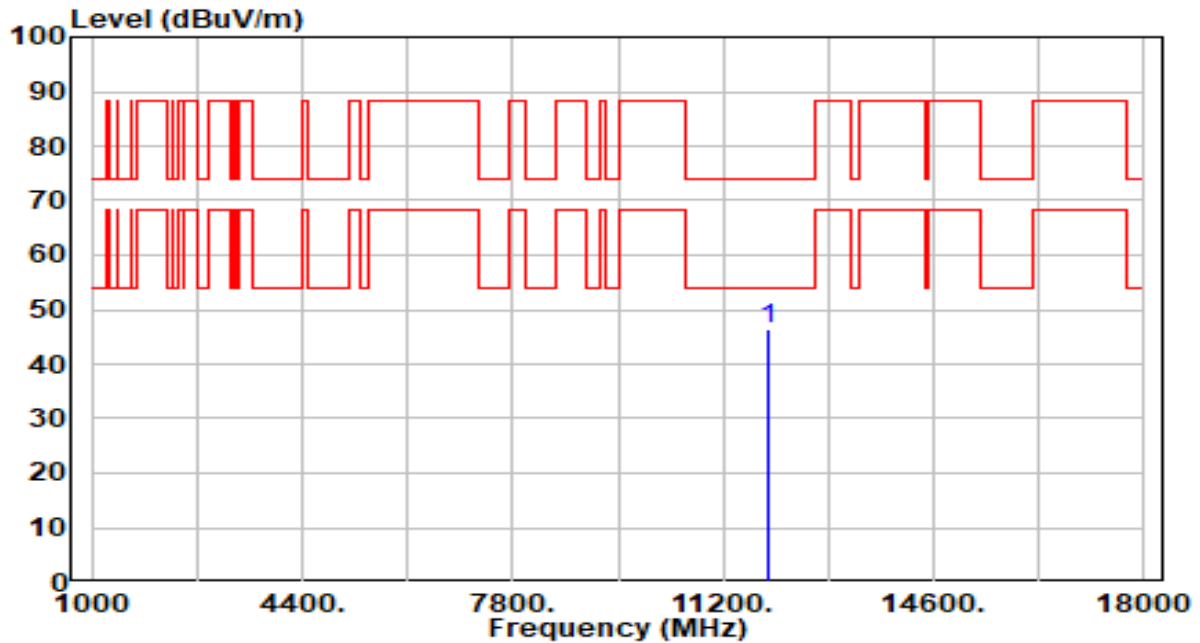


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 11910.000     | 42.60          | 3.78       | 46.38                | -27.62      | 74.00          | 100         | 118         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 45_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

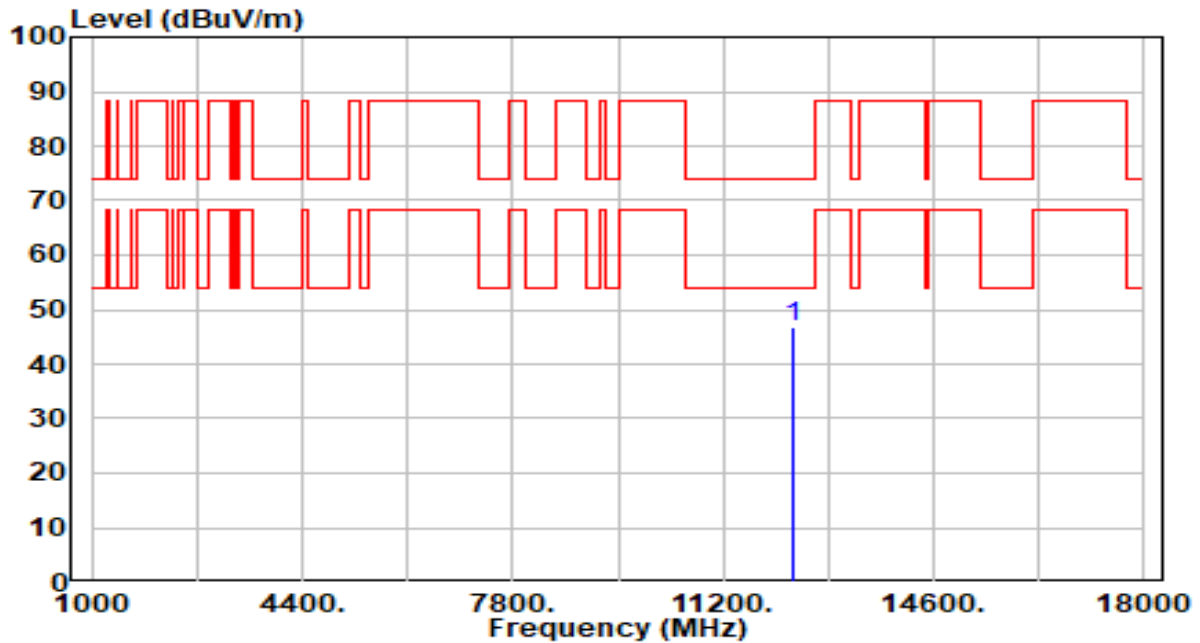


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12350.000     | 42.34          | 4.50       | 46.83                | -27.17      | 74.00          | 100         | 34          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 45_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

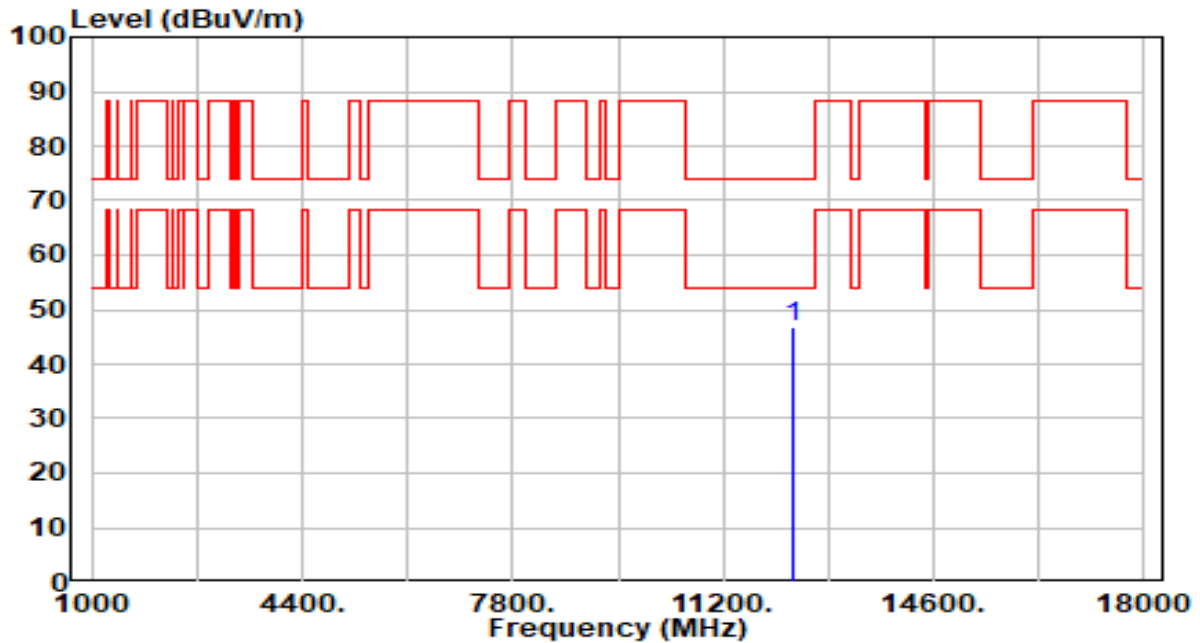


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12350.000     | 42.31          | 4.50       | 46.80                | -27.20      | 74.00          | 100         | 175         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 93_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

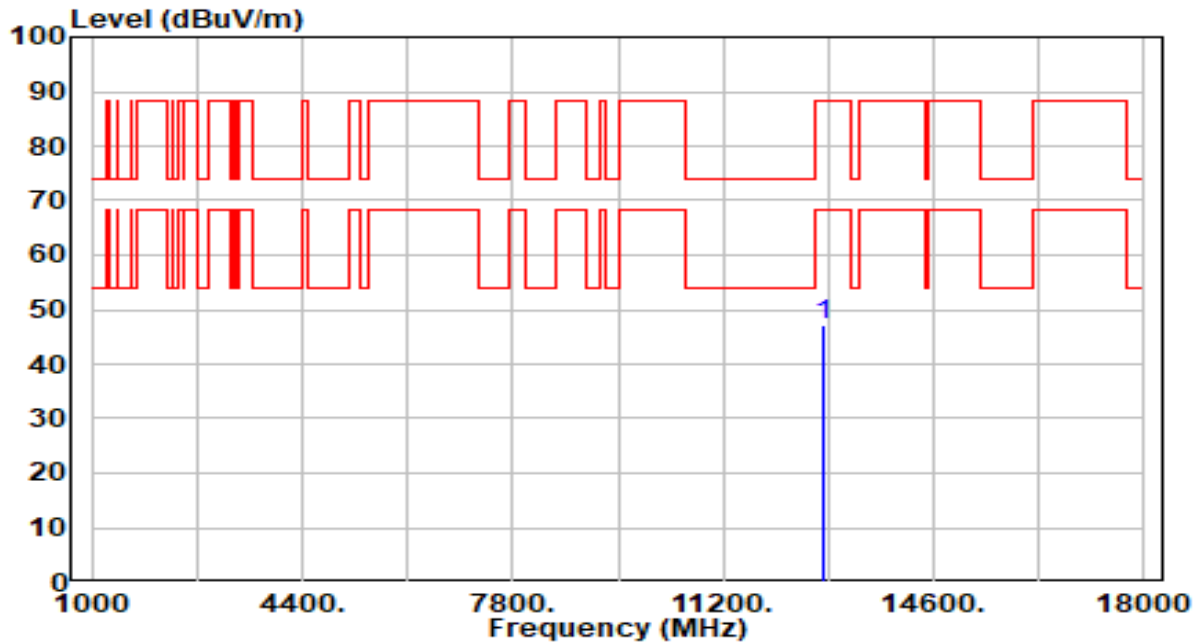


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12830.000     | 41.93          | 5.29       | 47.22                | -40.98      | 88.20          | 100         | 232         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 93_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

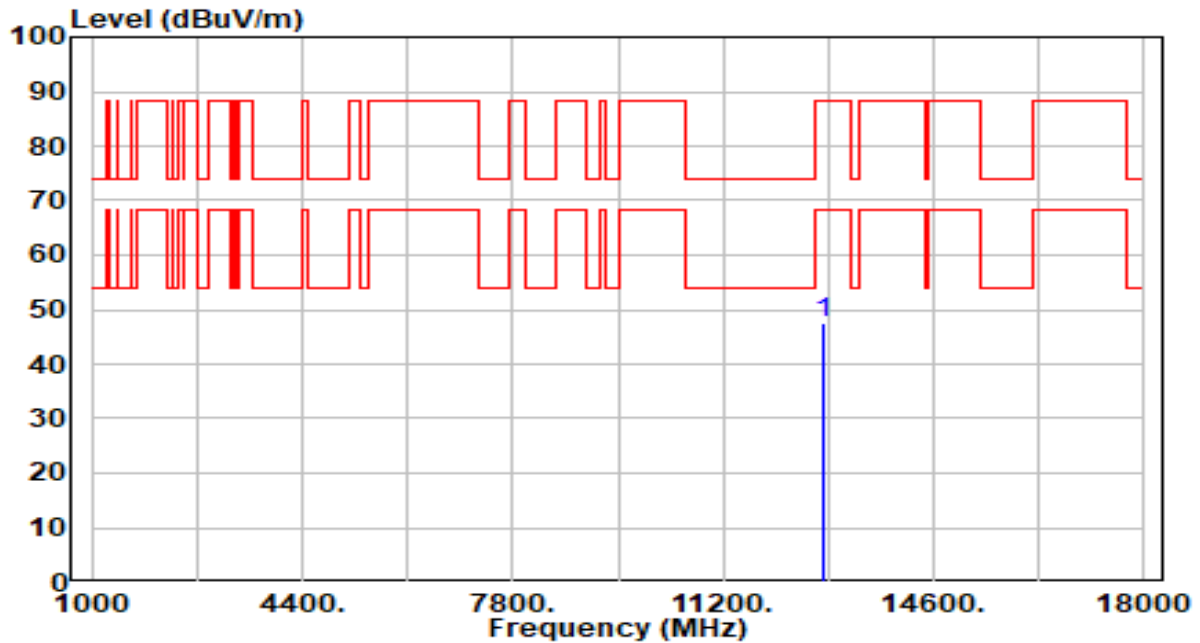


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12830.000     | 42.34          | 5.29       | 47.63                | -40.57      | 88.20          | 100         | 104         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band6_CH 97_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

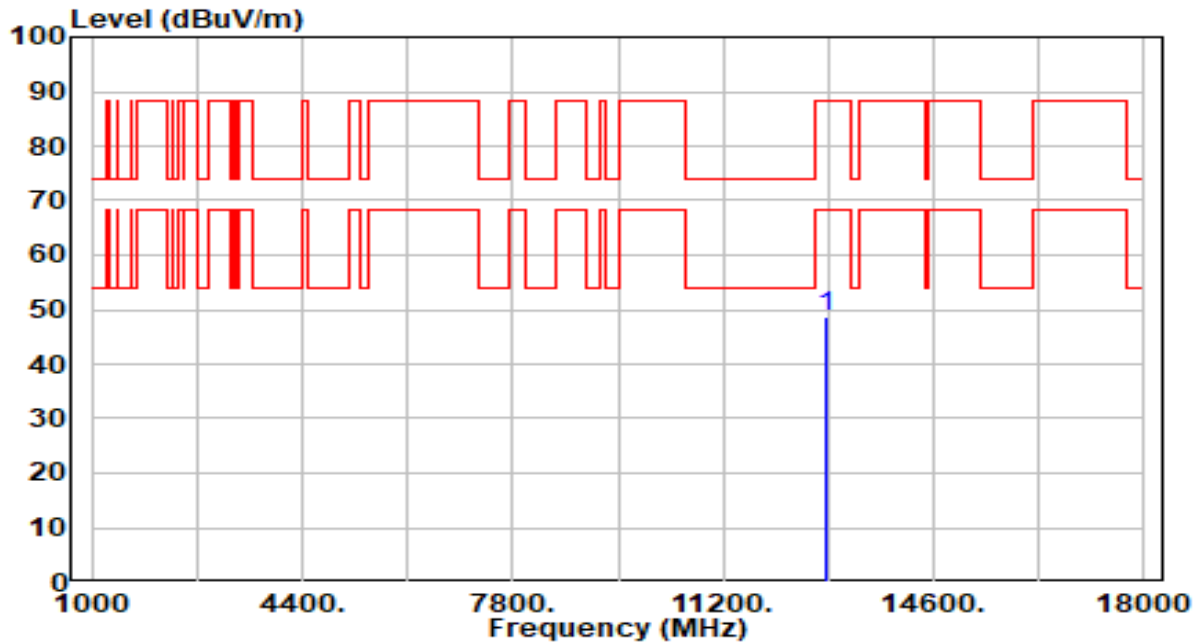


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12870.000     | 43.53          | 5.28       | 48.82                | -39.38      | 88.20          | 100         | 225         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band6_CH 97_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

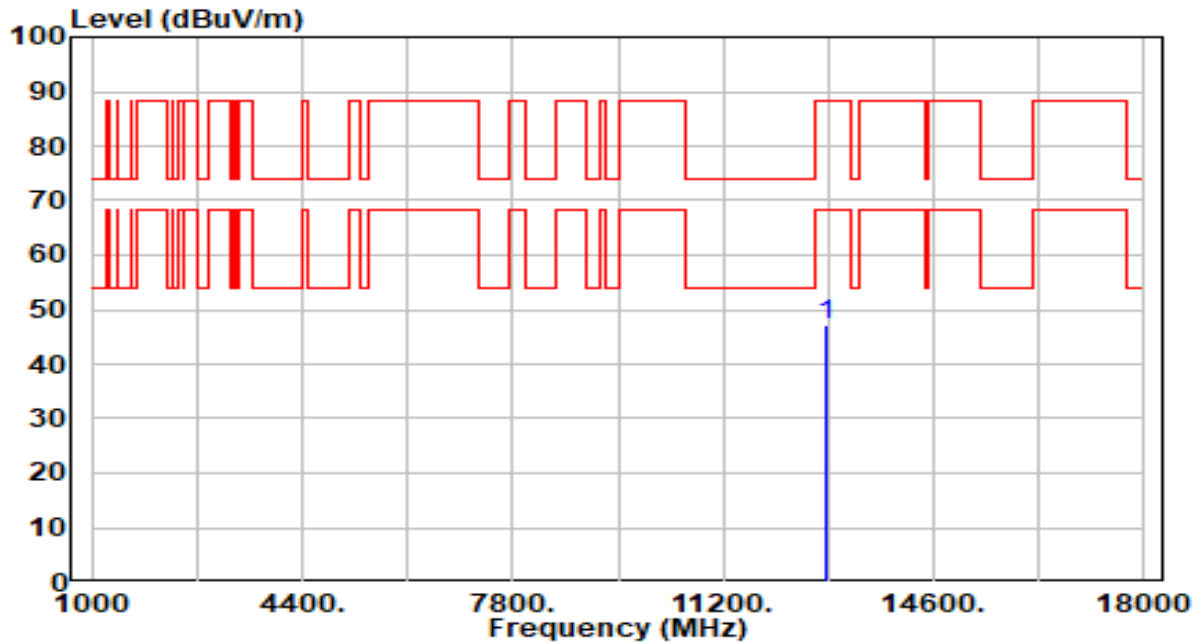


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12870.000     | 42.02          | 5.28       | 47.30                | -40.90      | 88.20          | 100         | 97          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band6_CH 105_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

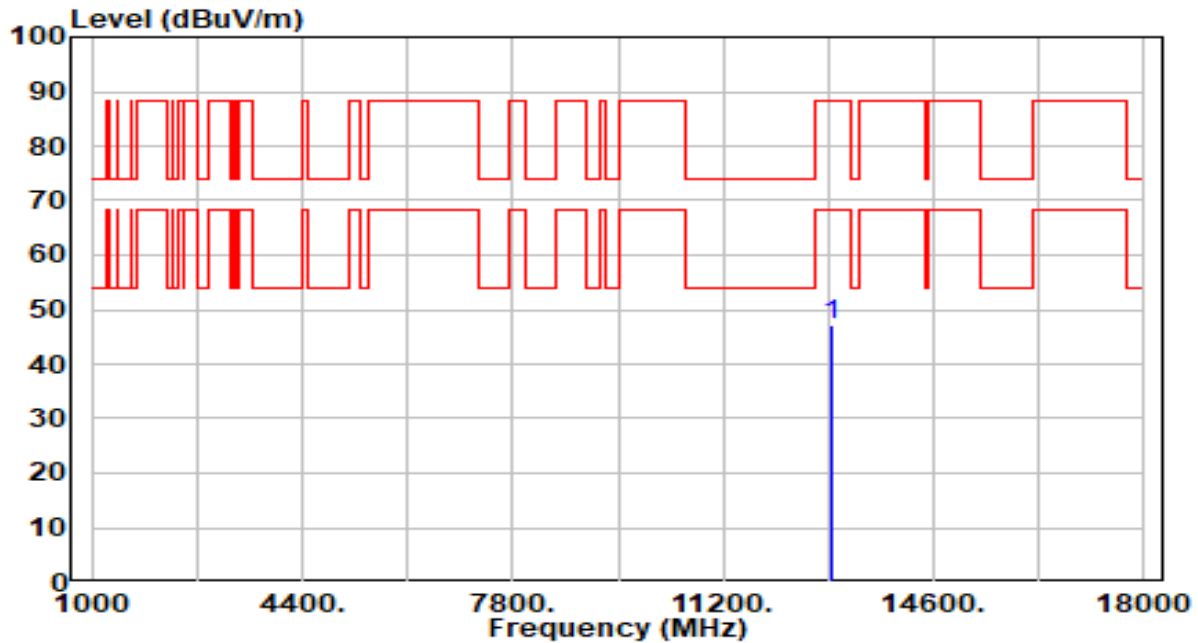


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12950.000     | 42.07          | 5.26       | 47.33                | -40.87      | 88.20          | 100         | 237         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band6_CH 105_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

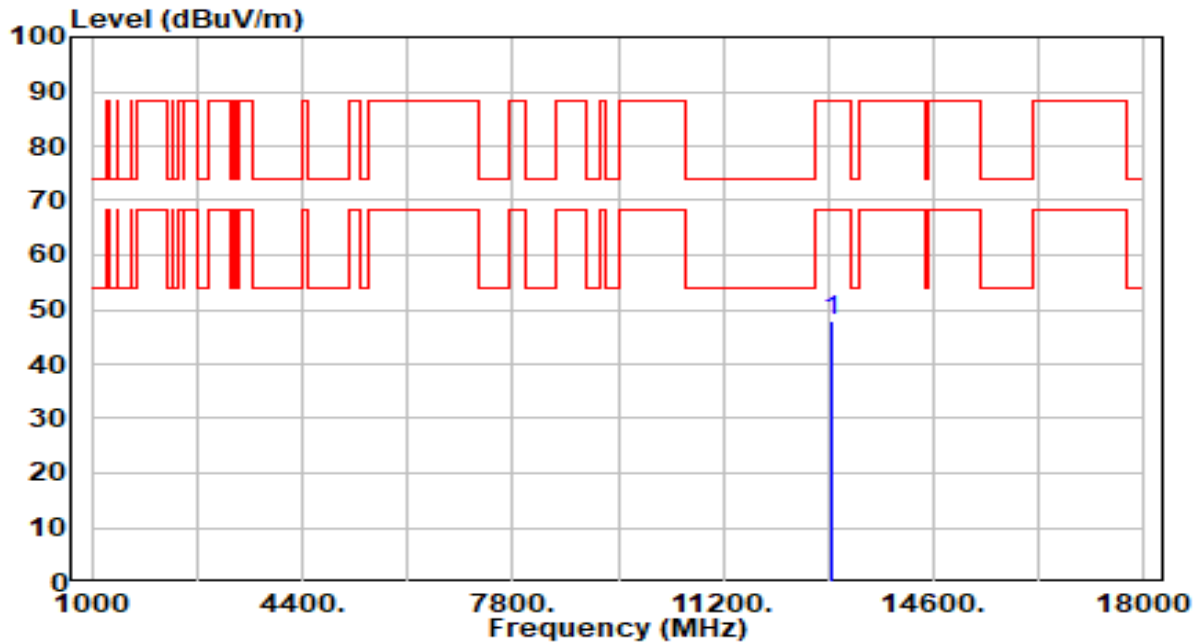


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12950.000     | 42.76          | 5.26       | 48.01                | -40.19      | 88.20          | 100         | 30          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band6_CH 113_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

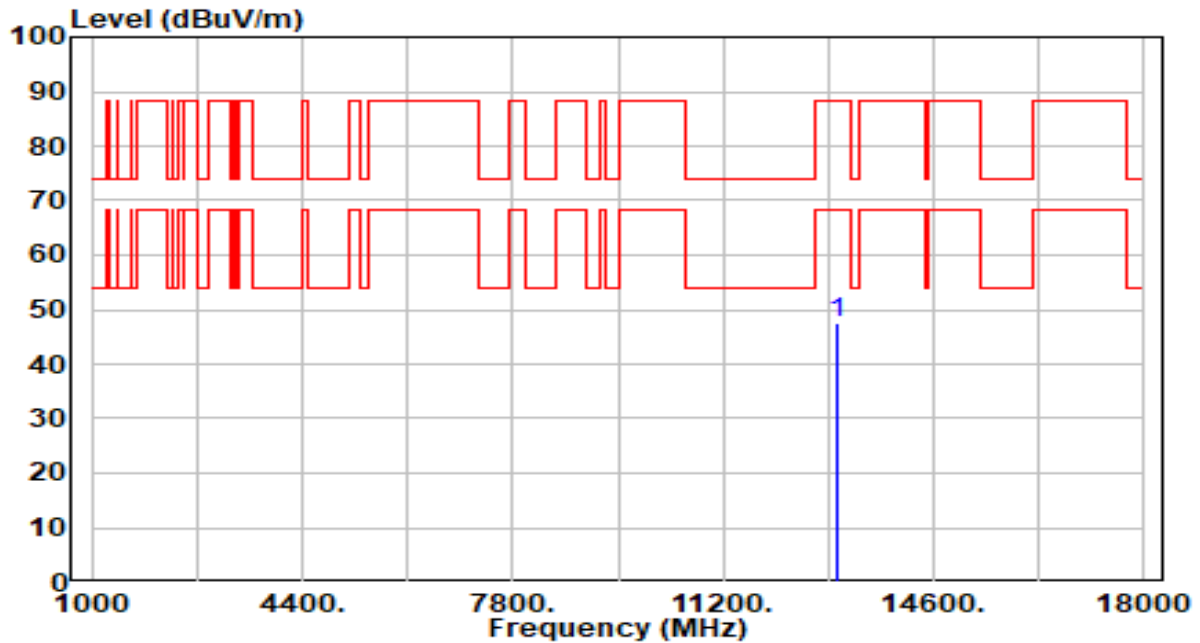


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13030.000     | 42.27          | 5.23       | 47.50                | -40.70      | 88.20          | 100         | 202         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band6_CH 113_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

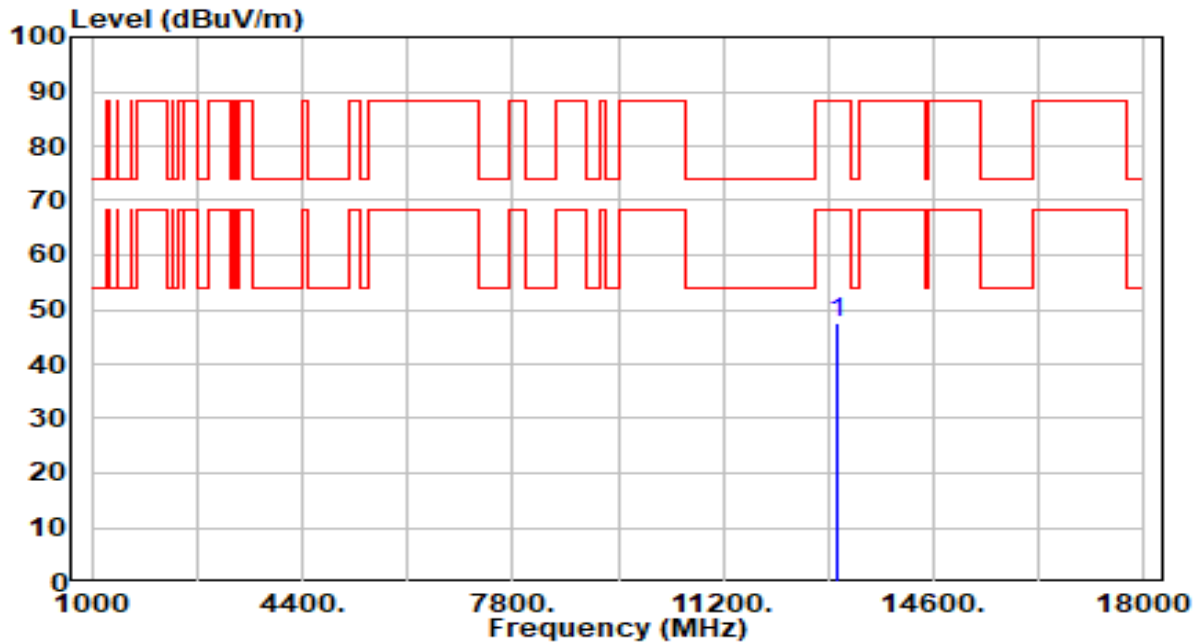


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13030.000     | 42.25          | 5.23       | 47.48                | -40.72      | 88.20          | 100         | 40          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 117_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

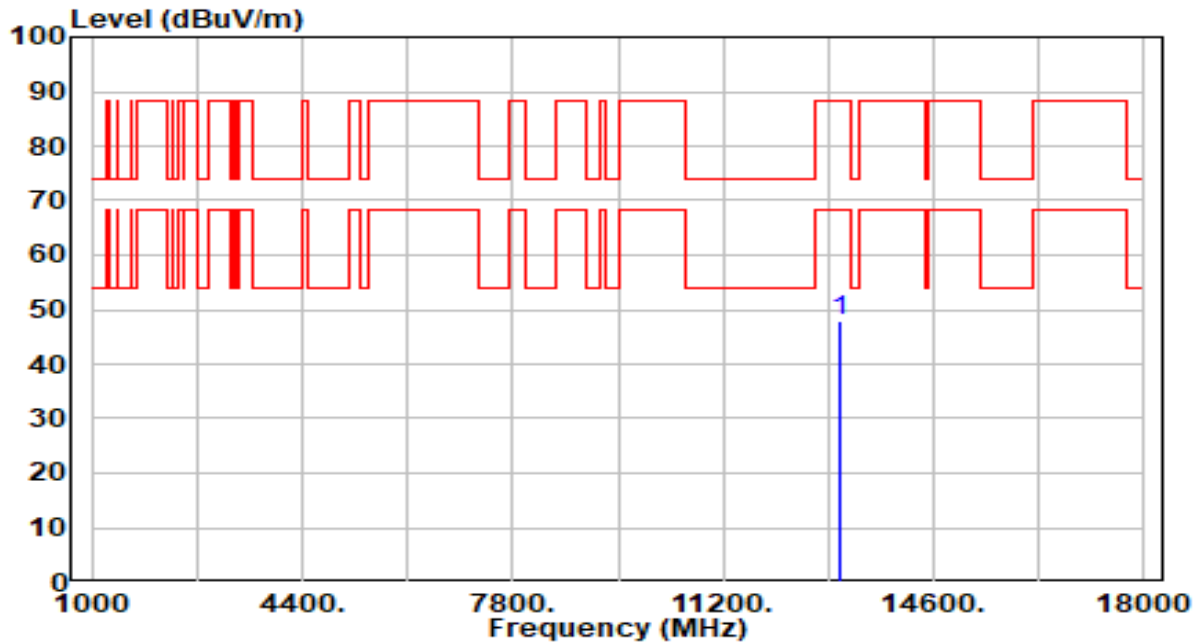


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13070.000     | 42.63          | 5.23       | 47.85                | -40.35      | 88.20          | 100         | 75          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 117_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

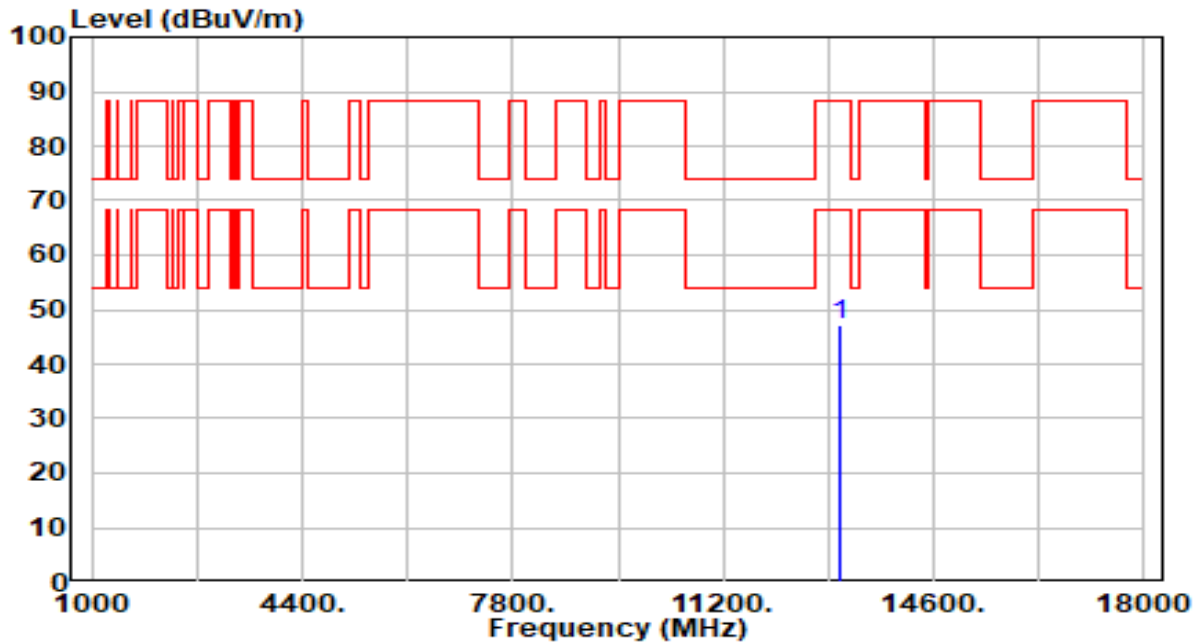


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13070.000     | 41.77          | 5.23       | 47.00                | -41.20      | 88.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 149_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

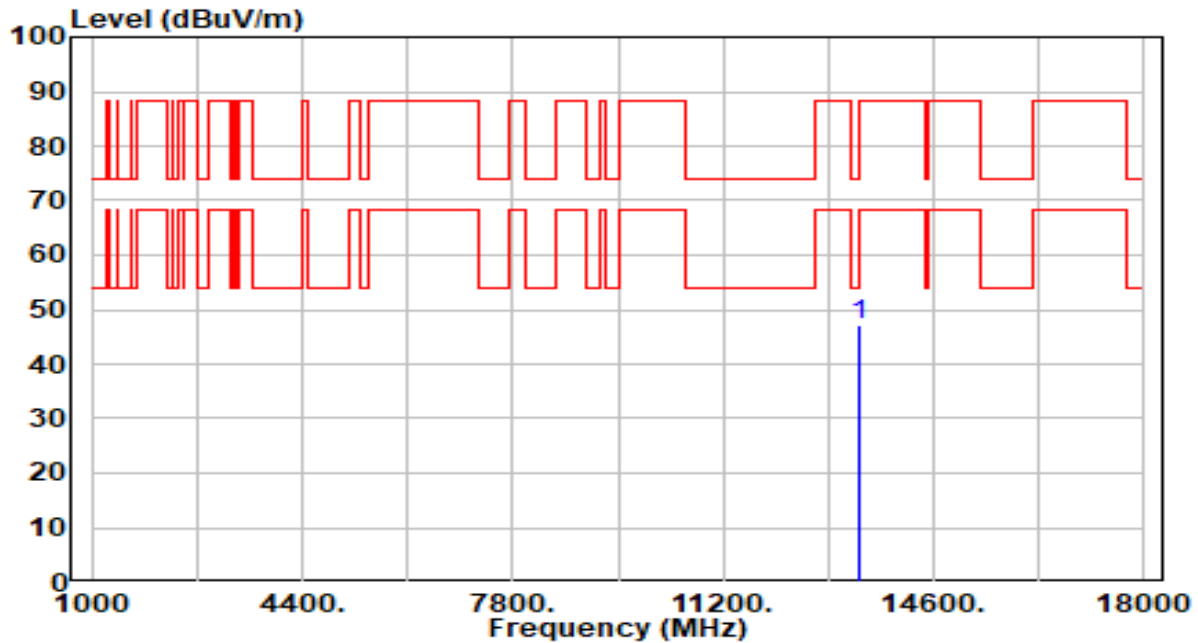


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13390.000     | 42.08          | 5.26       | 47.33                | -26.67      | 74.00          | 100         | 229         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 149_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

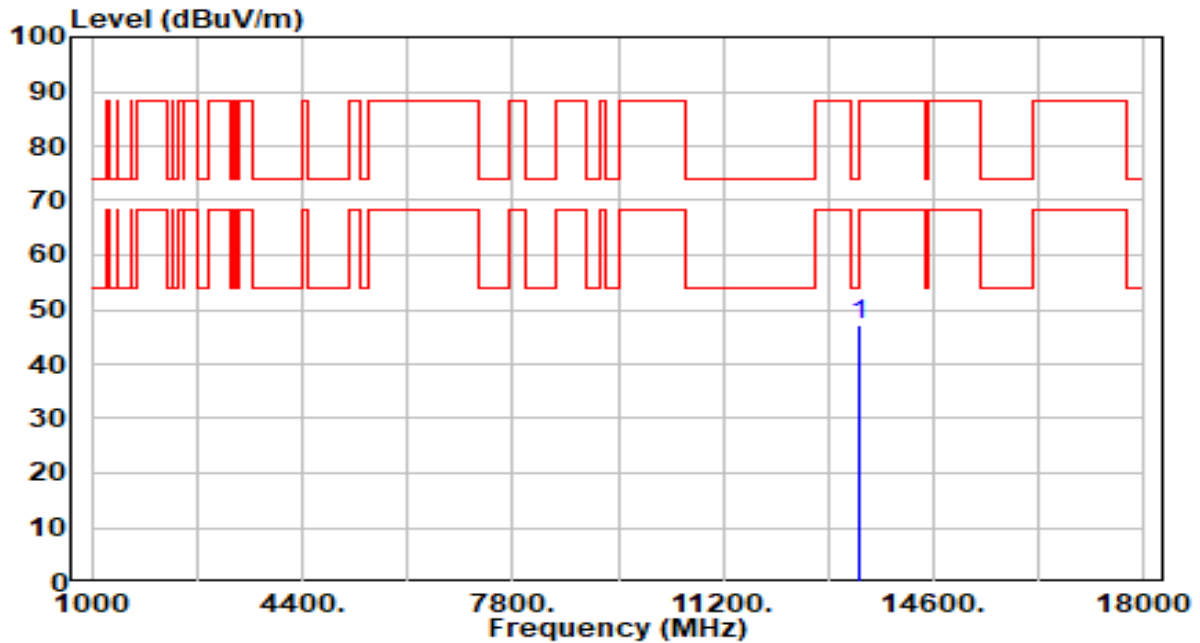


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13390.000     | 42.05          | 5.26       | 47.31                | -26.69      | 74.00          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 181_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

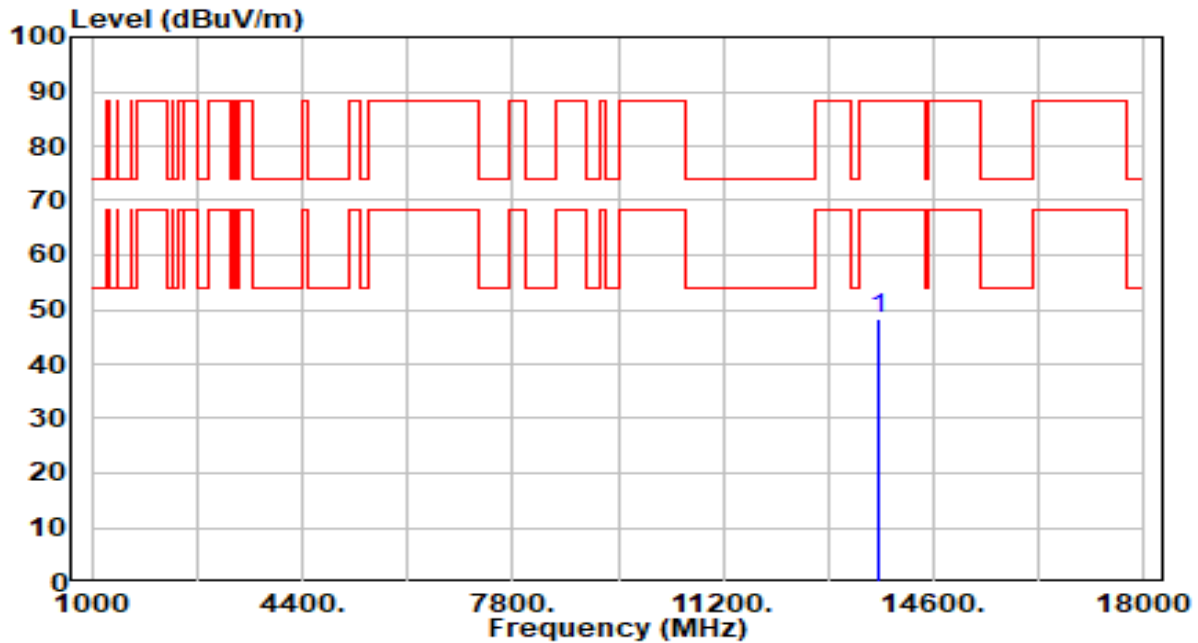


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13710.000     | 43.13          | 5.02       | 48.16                | -40.04      | 88.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 181_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

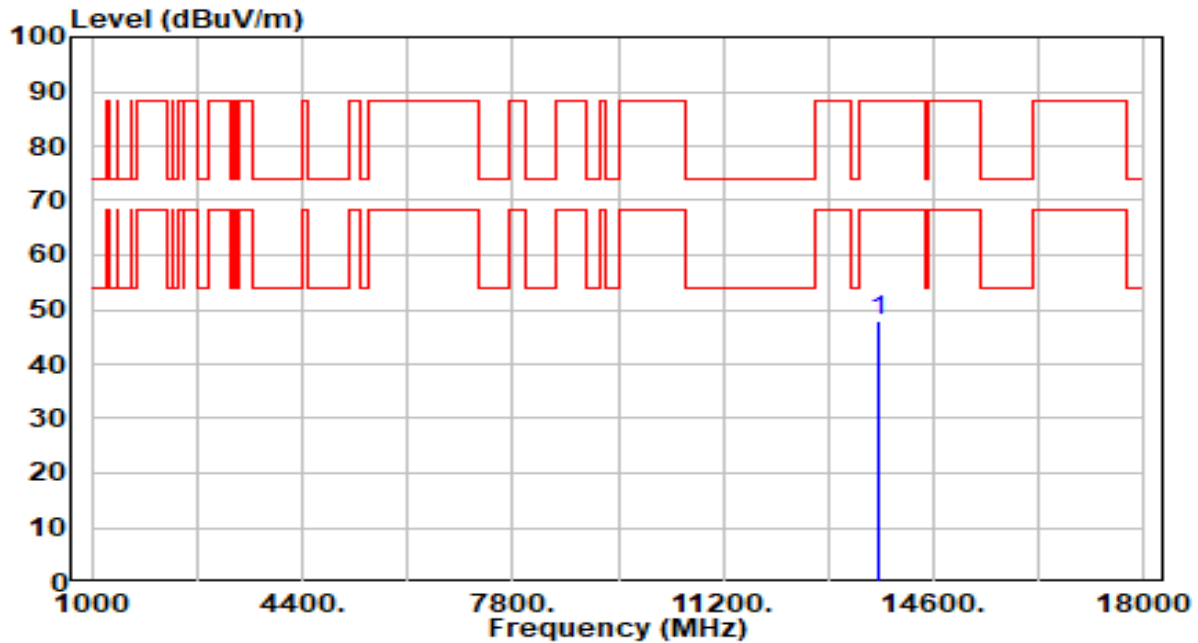


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13710.000     | 42.91          | 5.02       | 47.94                | -40.26      | 88.20          | 100         | 256         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 185_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

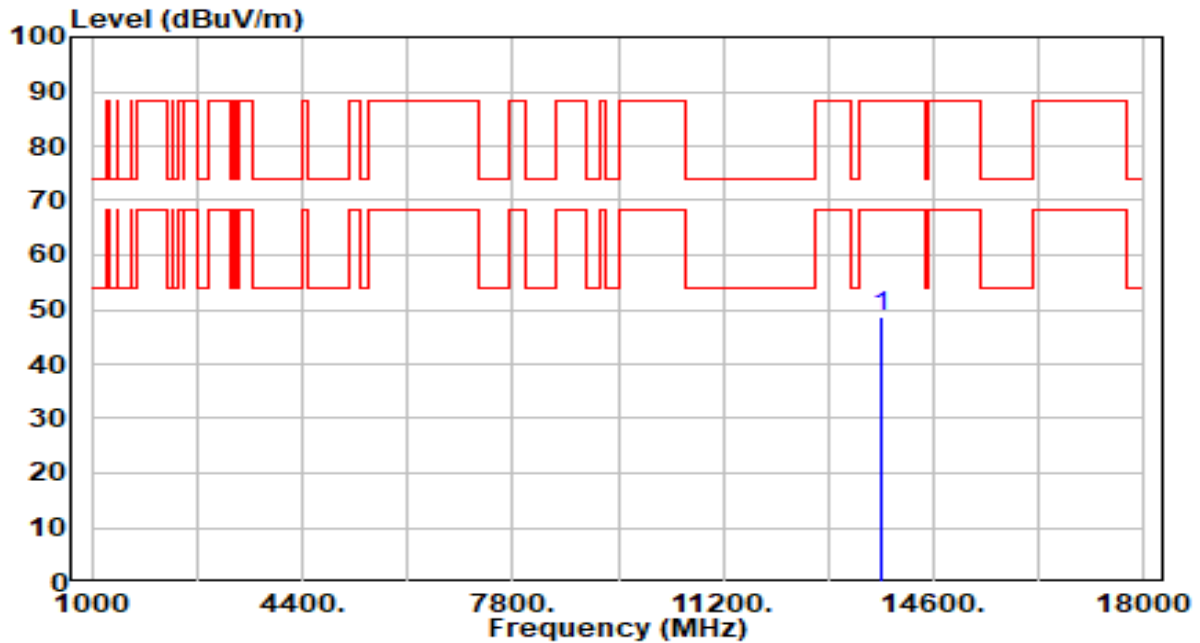


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13750.000     | 43.73          | 5.03       | 48.76                | -39.44      | 88.20          | 100         | 193         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 185_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

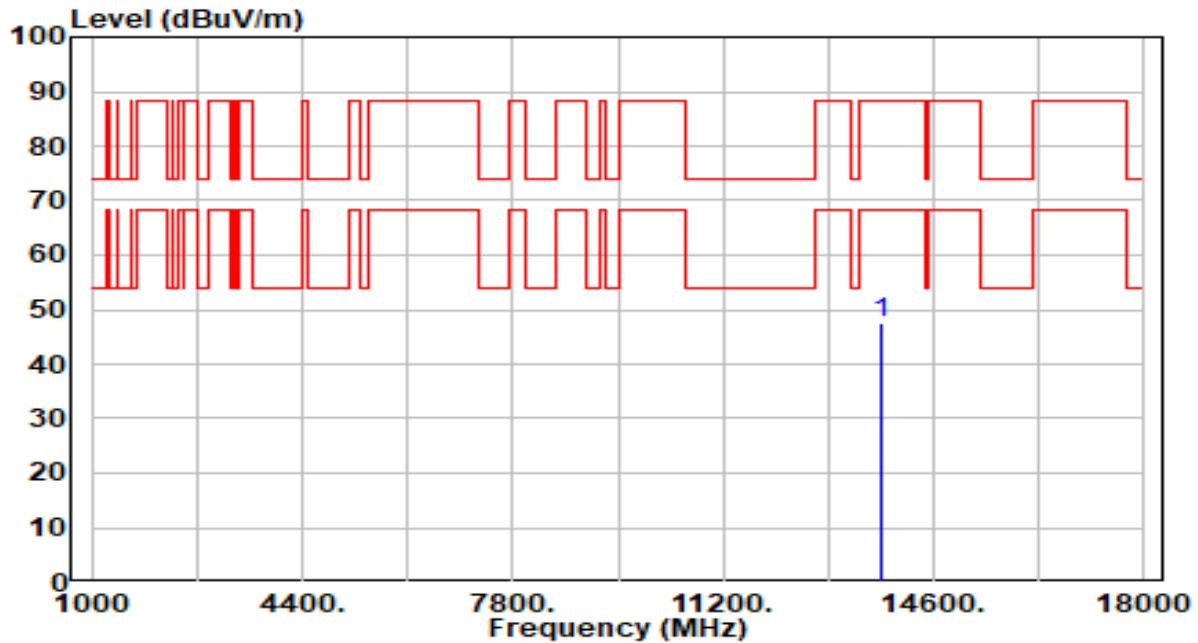


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13750.000     | 42.60          | 5.03       | 47.63                | -40.57      | 88.20          | 100         | 123         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 189_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

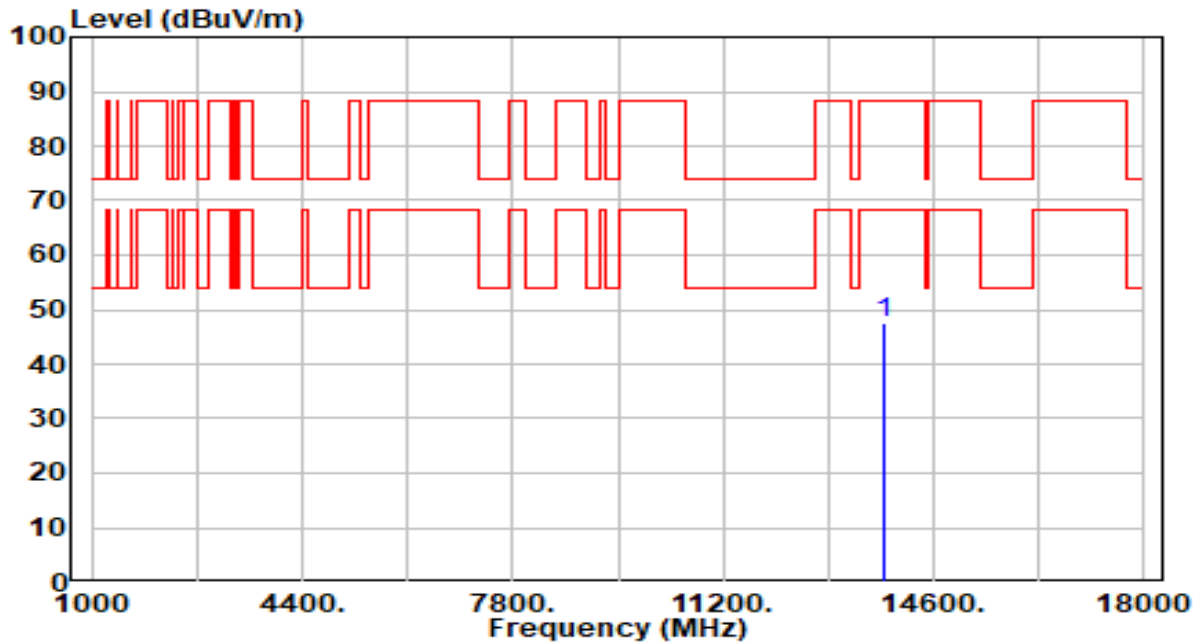


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13790.000     | 42.67          | 5.04       | 47.71                | -40.49      | 88.20          | 100         | 162         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 189_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

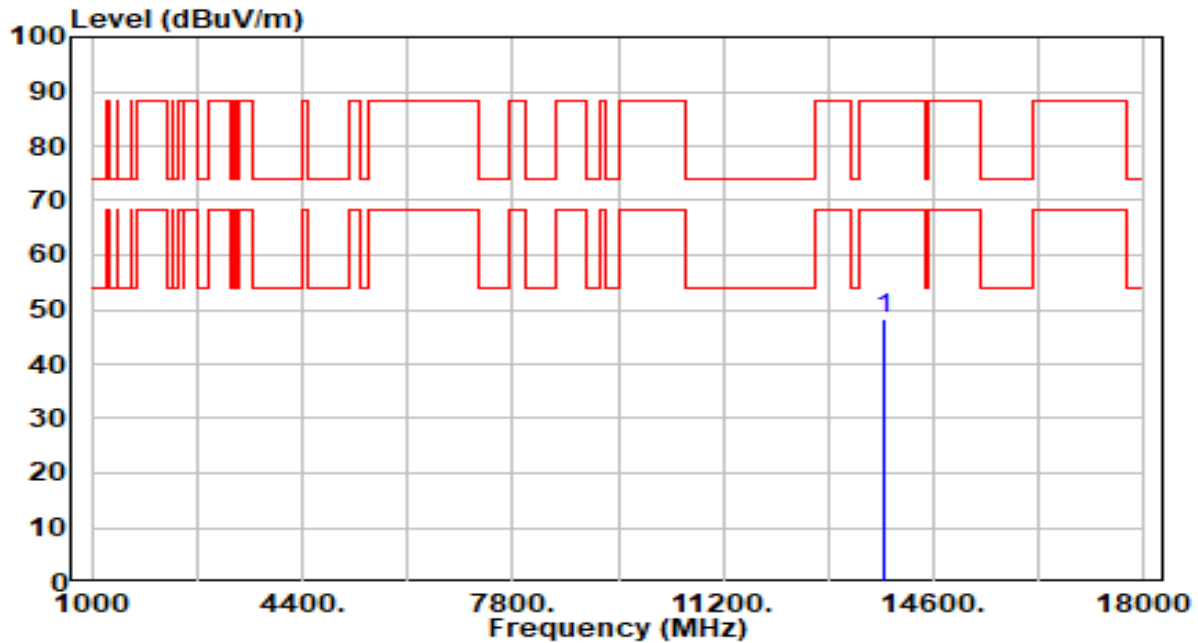


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13790.000     | 43.43          | 5.04       | 48.46                | -39.74      | 88.20          | 100         | 182         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 213_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

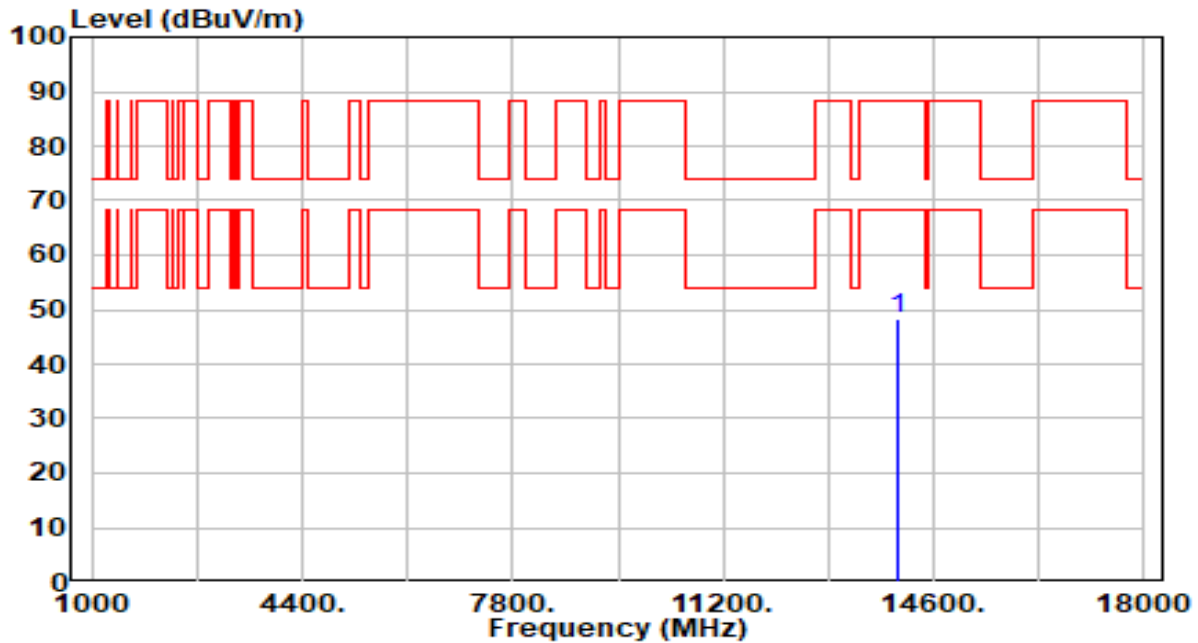


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14030.000     | 43.30          | 5.16       | 48.46                | -39.74      | 88.20          | 100         | 244         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 213_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

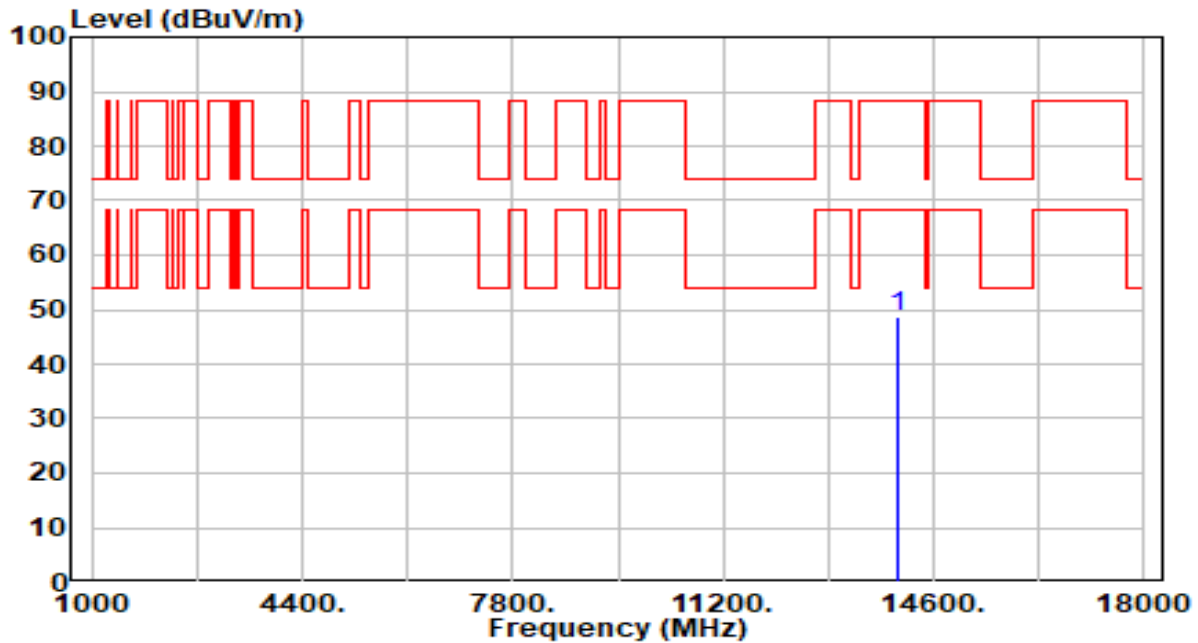


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14030.000     | 43.62          | 5.16       | 48.78                | -39.42      | 88.20          | 0           | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

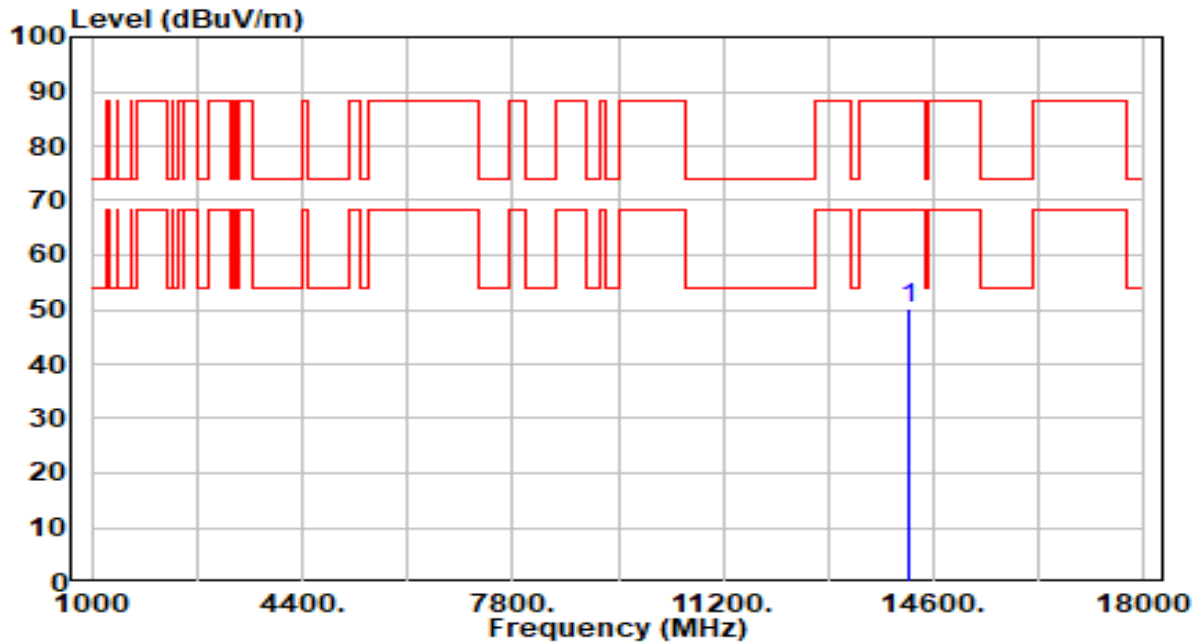


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14190.000     | 45.19          | 5.09       | 50.28                | -37.92      | 88.20          | 100         | 29          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

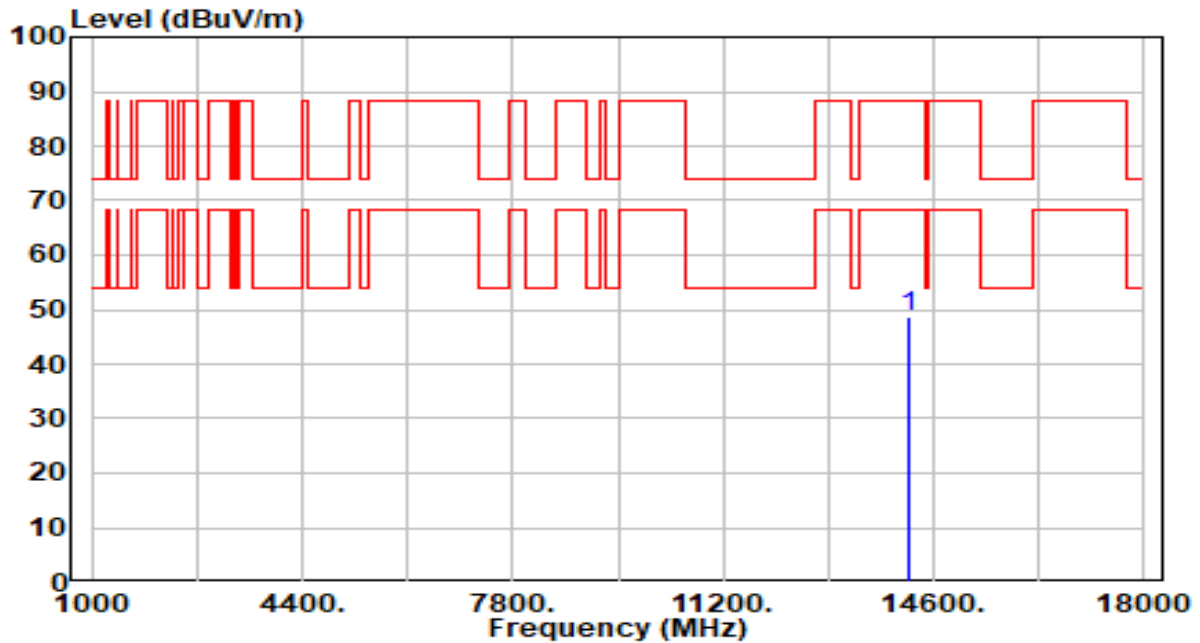


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14190.000     | 43.73          | 5.09       | 48.82                | -39.38      | 88.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 3_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

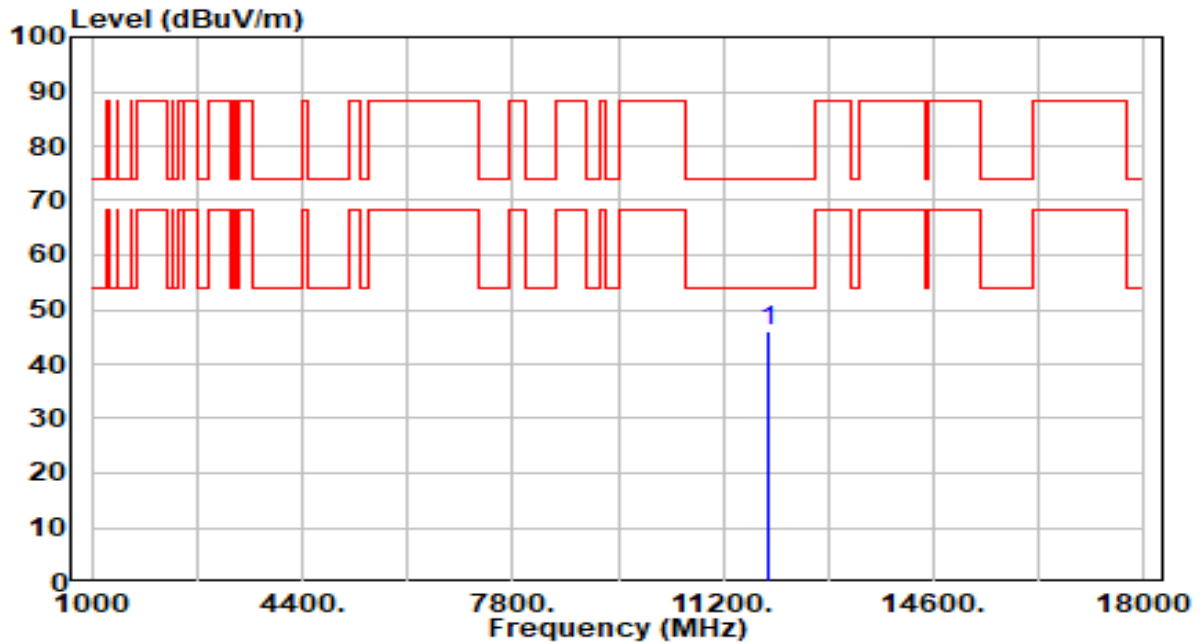


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 11930.000       | 42.10          | 3.81       | 45.90                | -28.10      | 74.00          | 100         | 309         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 3_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

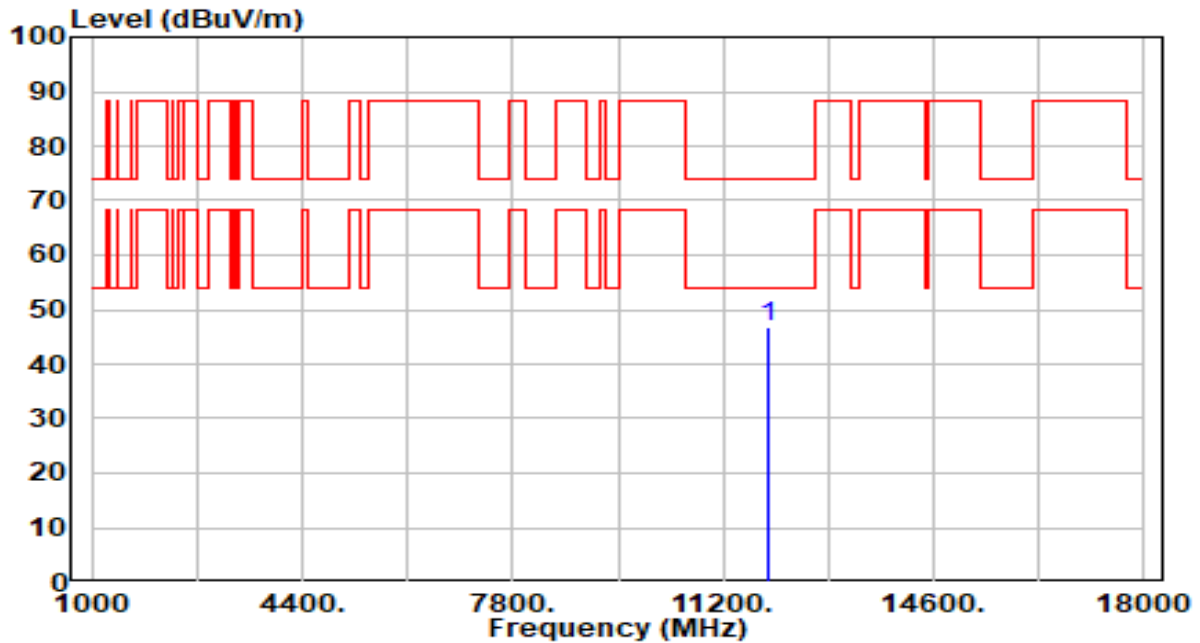


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 11930.000     | 42.87          | 3.81       | 46.68                | -27.32      | 74.00          | 100         | 305         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 43_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

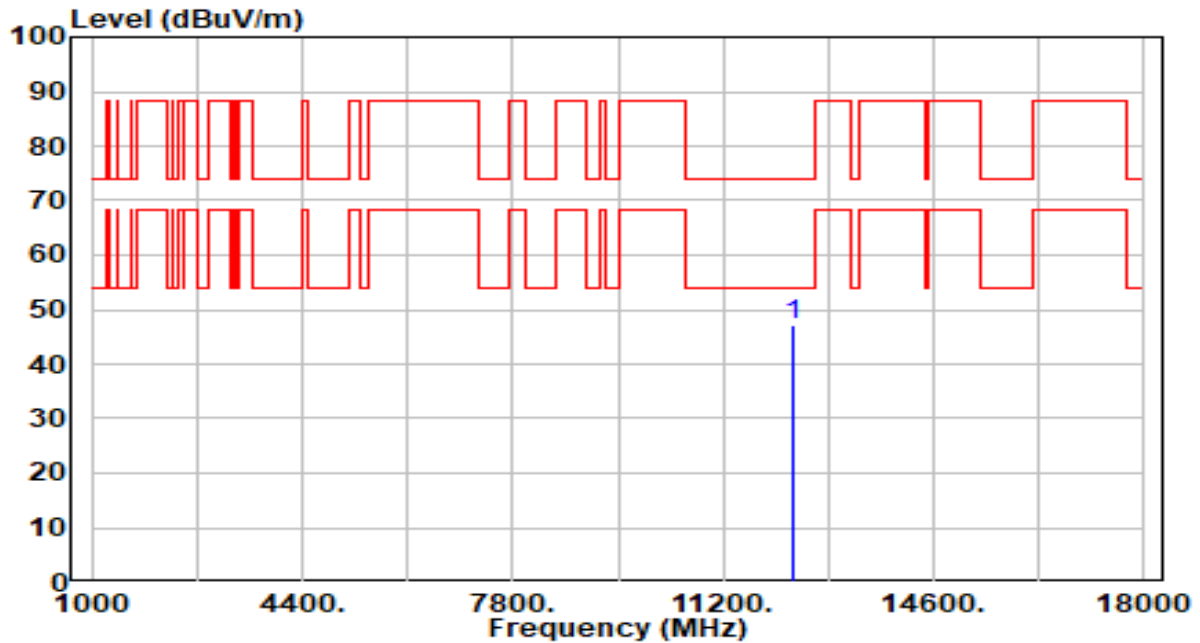


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12330.000     | 42.75          | 4.47       | 47.22                | -26.78      | 74.00          | 100         | 259         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 43_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

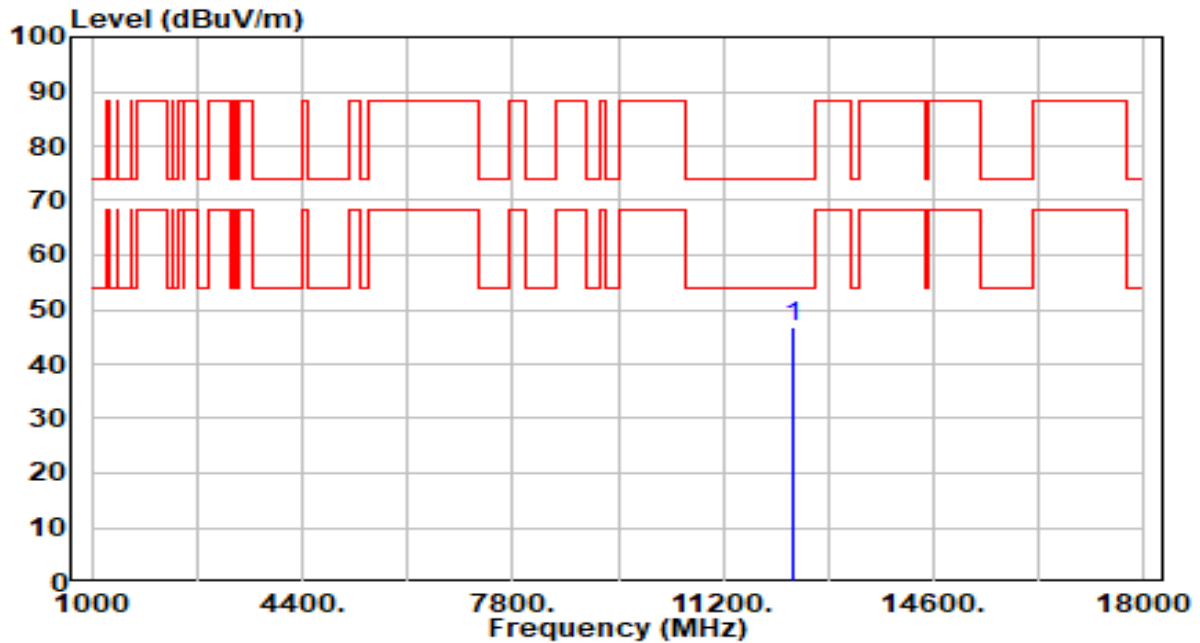


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12330.000     | 42.22          | 4.47       | 46.69                | -27.31      | 74.00          | 100         | 62          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 91_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

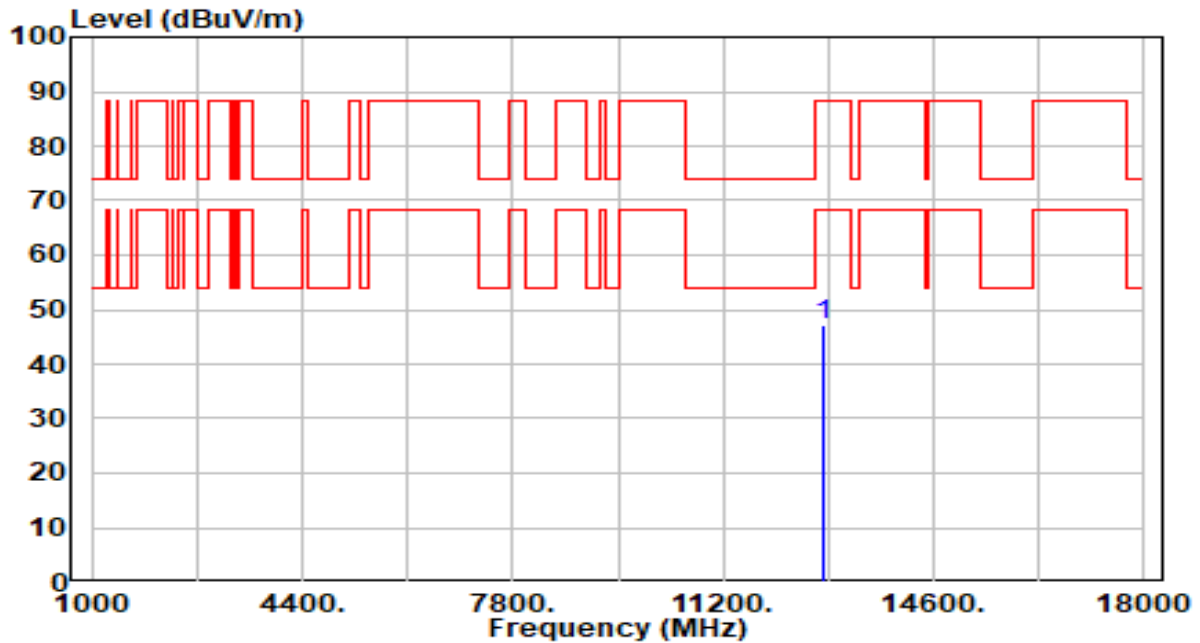


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12810.000     | 42.04          | 5.30       | 47.34                | -40.86      | 88.20          | 100         | 339         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 91_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

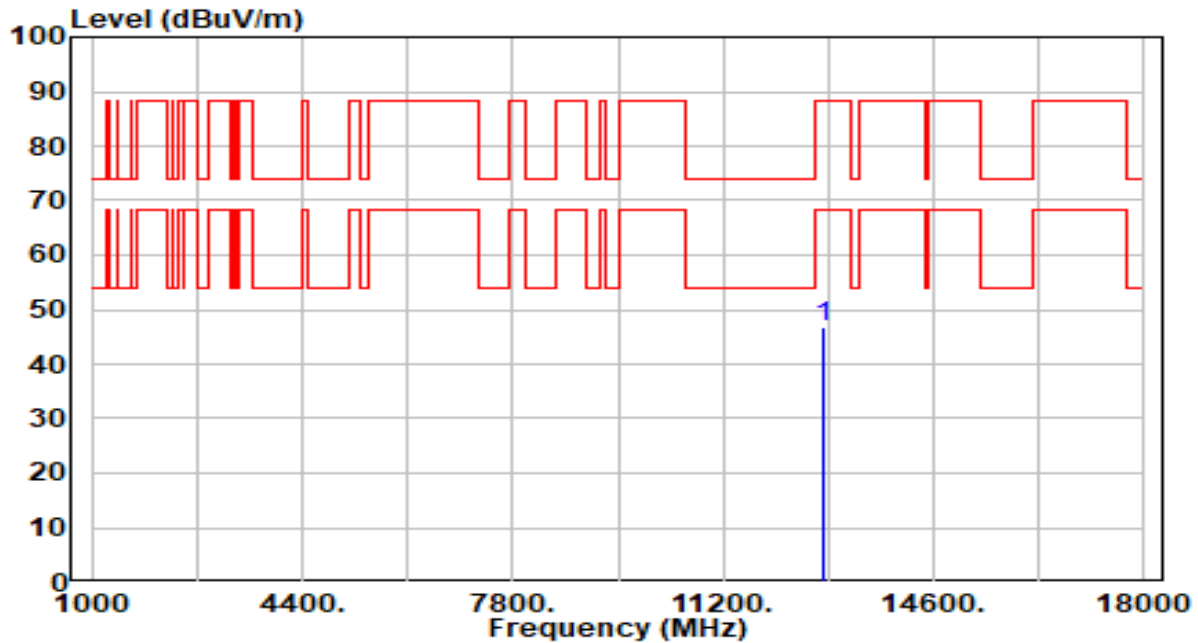


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12810.000     | 41.66          | 5.30       | 46.96                | -41.24      | 88.20          | 100         | 247         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band6_CH 99_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

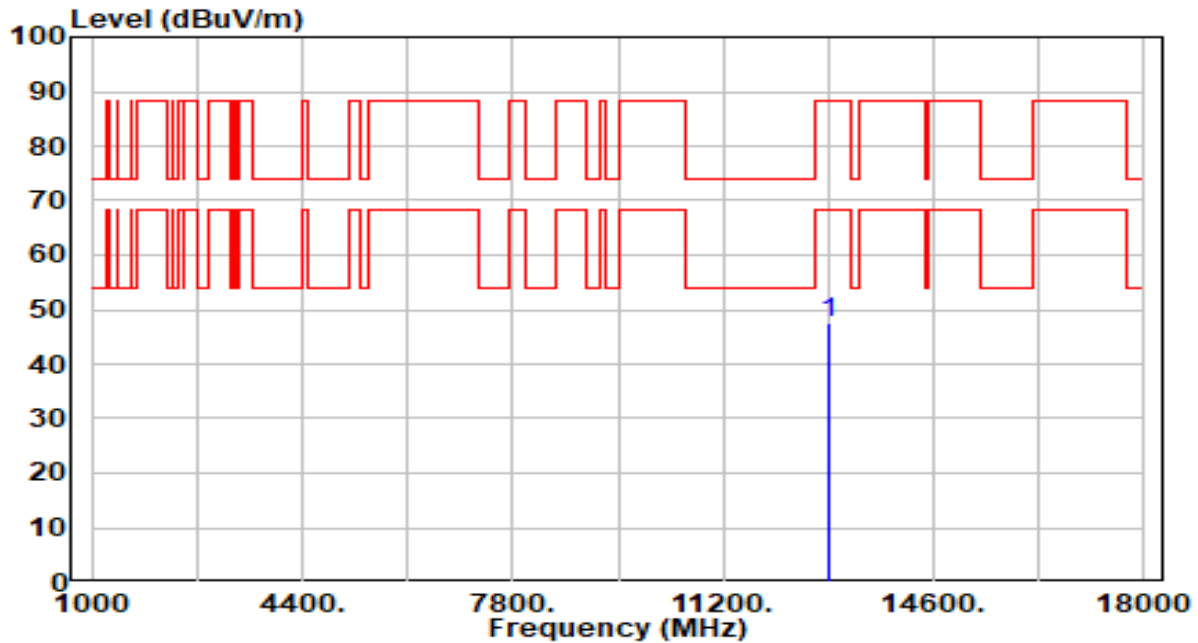


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12890.000     | 42.40          | 5.28       | 47.68                | -40.52      | 88.20          | 100         | 308         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band6_CH 99_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

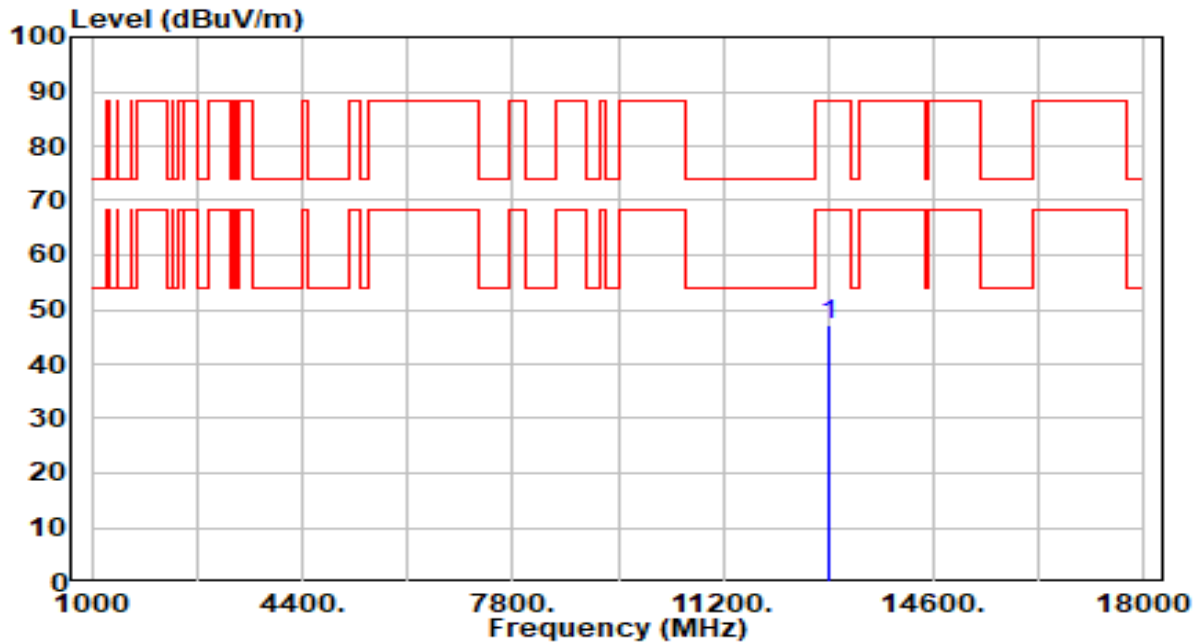


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12890.000     | 41.97          | 5.28       | 47.24                | -40.96      | 88.20          | 100         | 179         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band6_CH 107_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

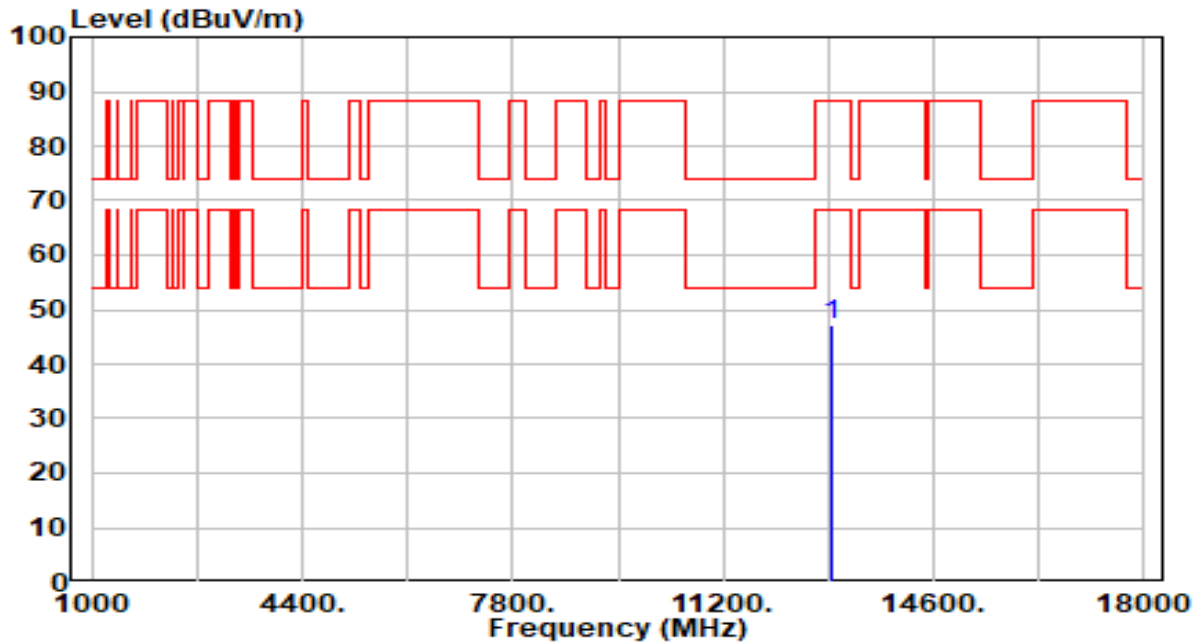


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12970.000     | 41.97          | 5.25       | 47.22                | -40.98      | 88.20          | 100         | 274         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band6_CH 107_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

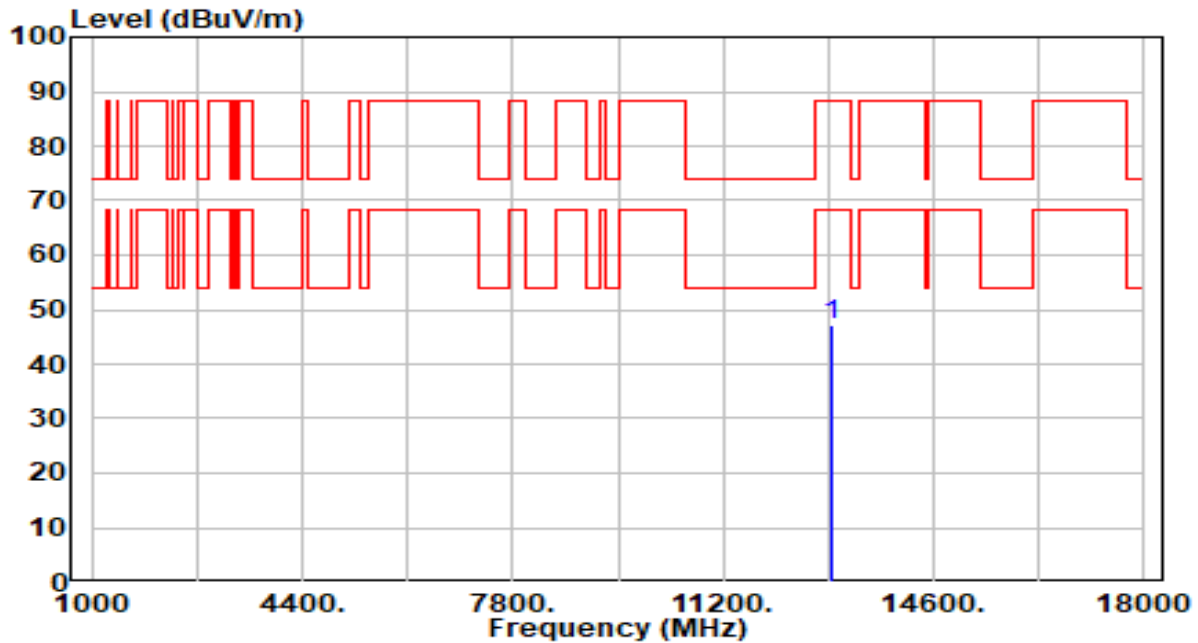


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12970.000     | 42.10          | 5.25       | 47.35                | -40.85      | 88.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band6_CH 115_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

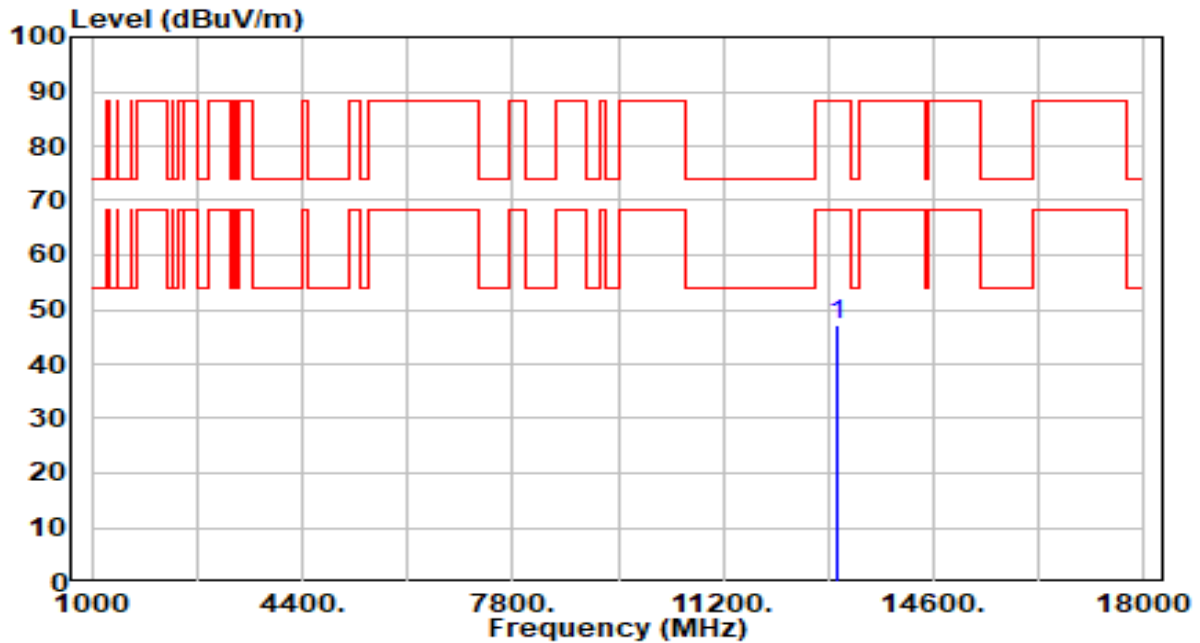


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13050.000     | 41.85          | 5.23       | 47.08                | -41.12      | 88.20          | 100         | 196         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band6_CH 115_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

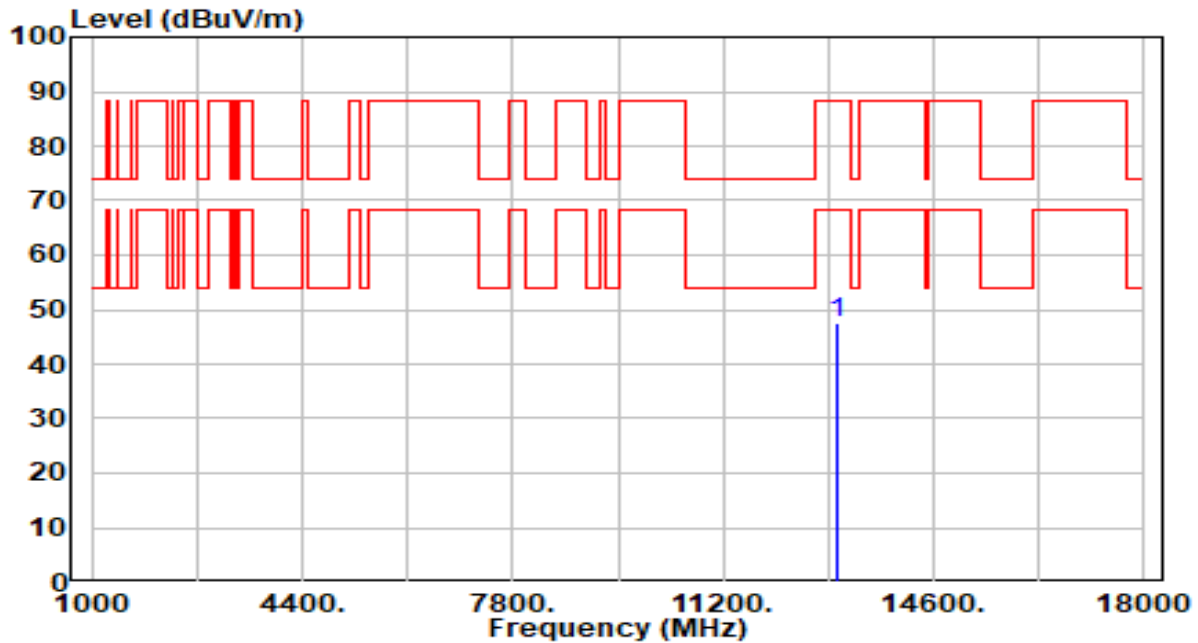


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13050.000     | 42.32          | 5.23       | 47.55                | -40.65      | 88.20          | 100         | 152         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 123_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

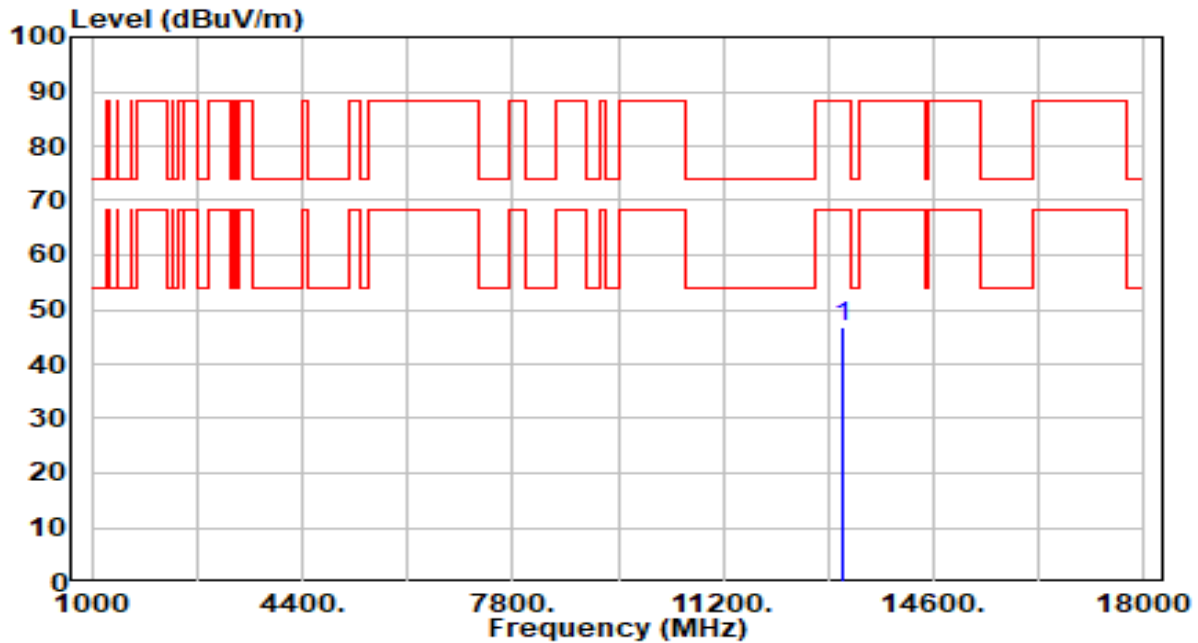


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13130.000     | 41.61          | 5.21       | 46.83                | -41.37      | 88.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 123_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

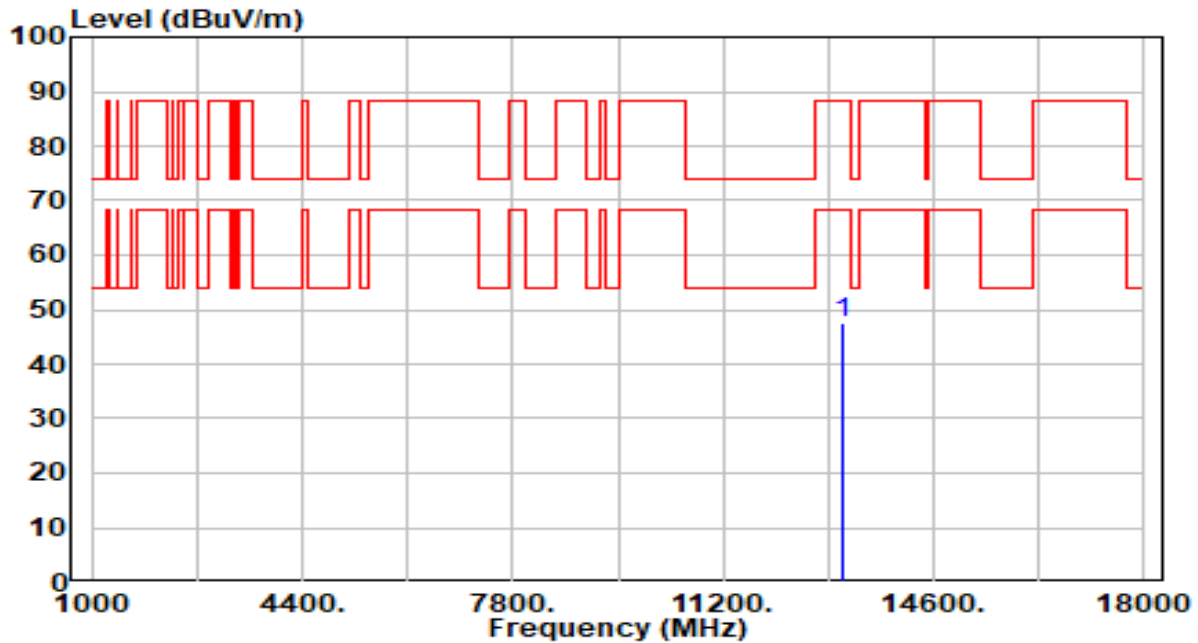


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13130.000     | 42.21          | 5.21       | 47.42                | -40.78      | 88.20          | 100         | 320         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 147_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

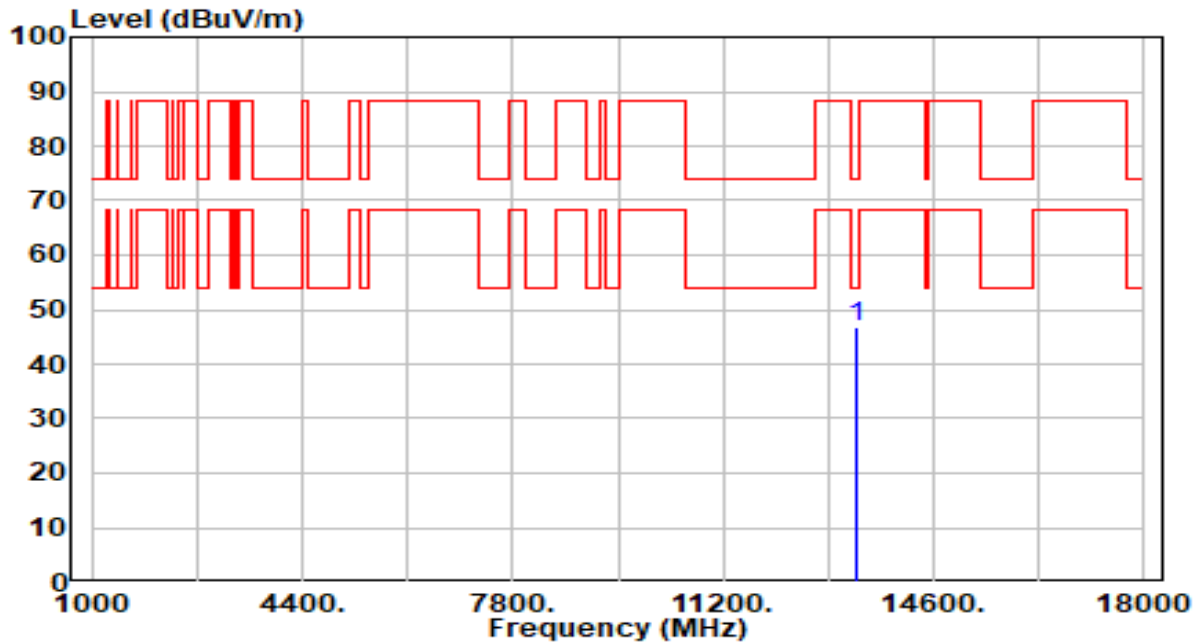


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13370.000     | 41.44          | 5.25       | 46.69                | -27.31      | 74.00          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 147_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

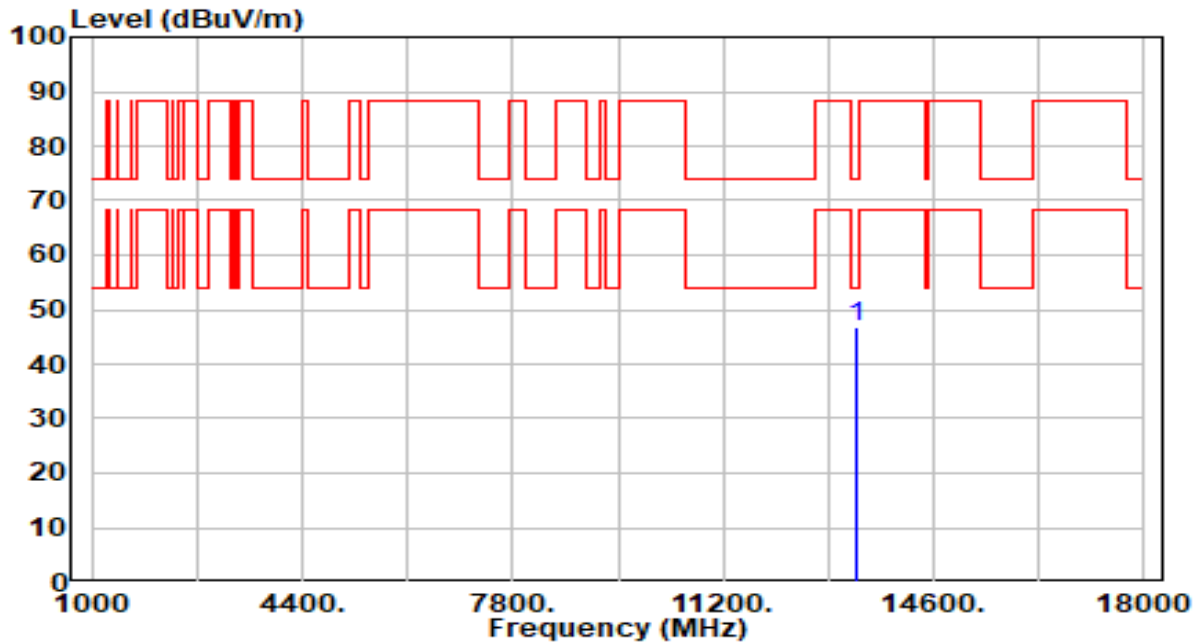


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13370.000     | 41.73          | 5.25       | 46.98                | -27.02      | 74.00          | 100         | 34          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 179_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

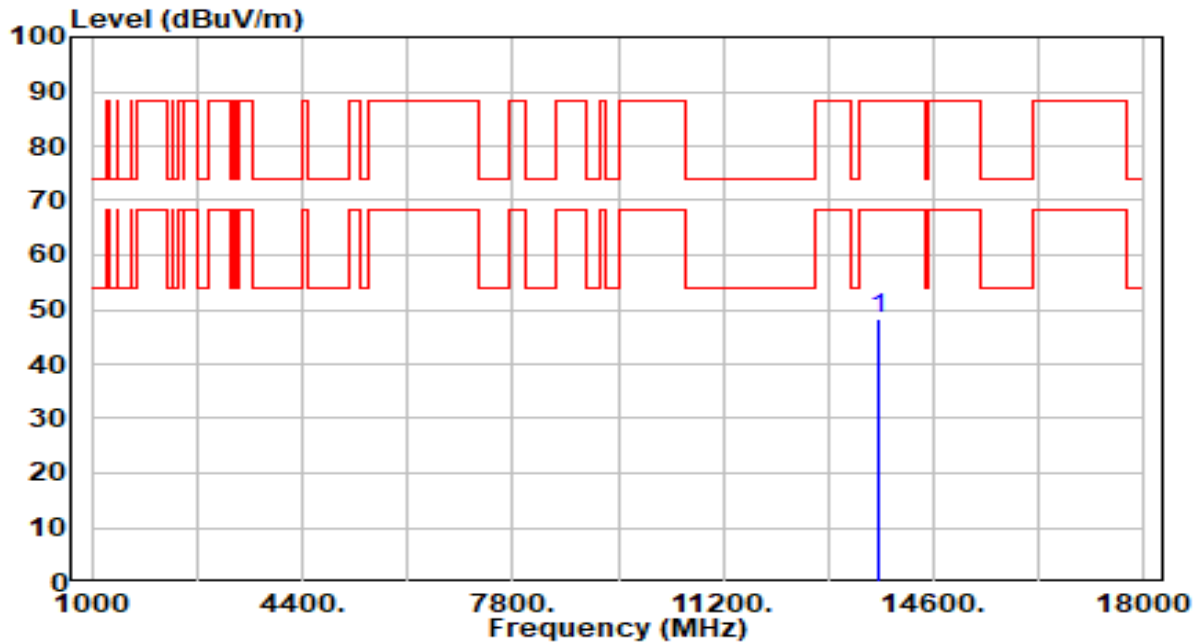


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13690.000     | 43.22          | 5.02       | 48.24                | -39.96      | 88.20          | 100         | 203         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 179_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

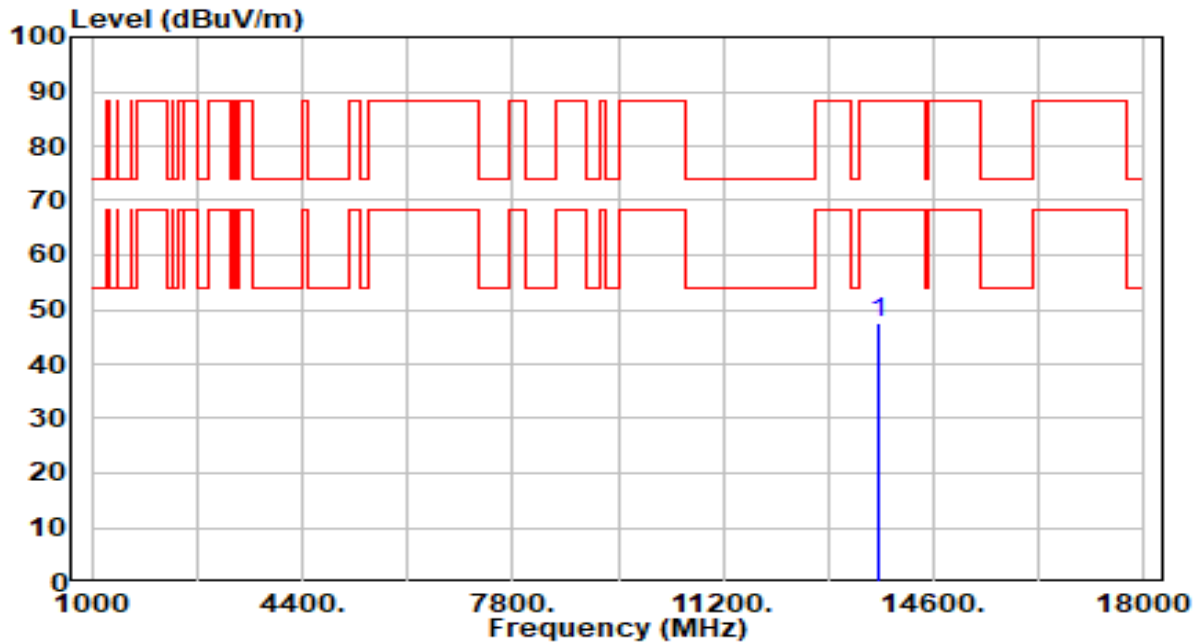


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13690.000     | 42.44          | 5.02       | 47.46                | -40.74      | 88.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 187_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

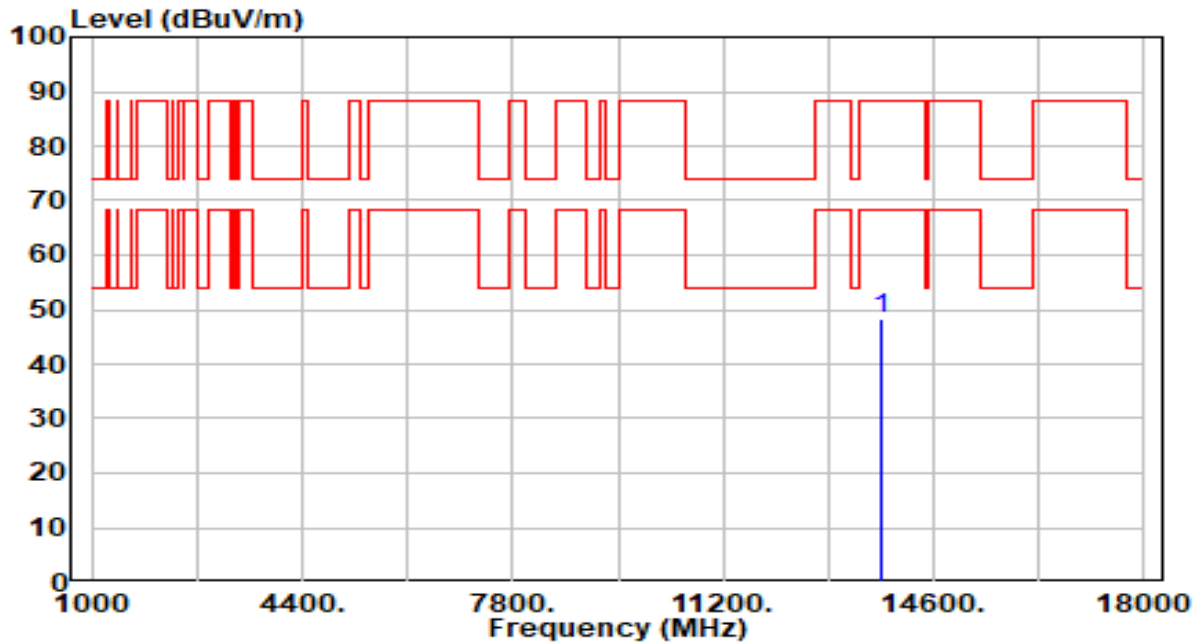


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13770.000     | 43.09          | 5.03       | 48.12                | -40.08      | 88.20          | 100         | 82          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 187_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

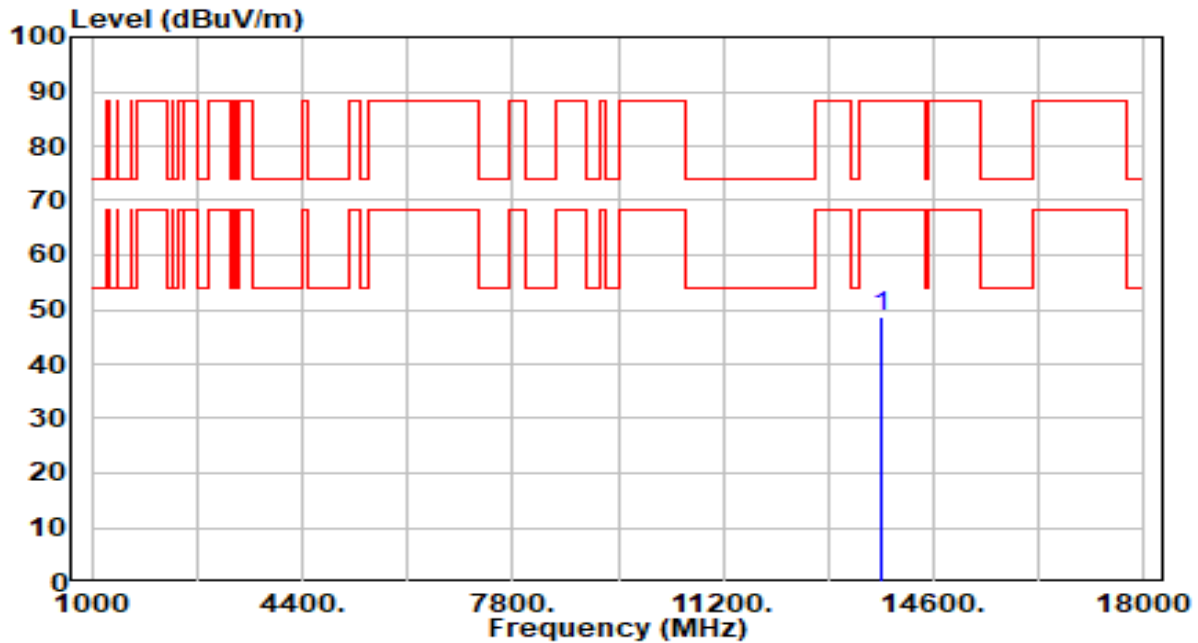


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13770.000     | 43.52          | 5.03       | 48.55                | -39.65      | 88.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 195_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

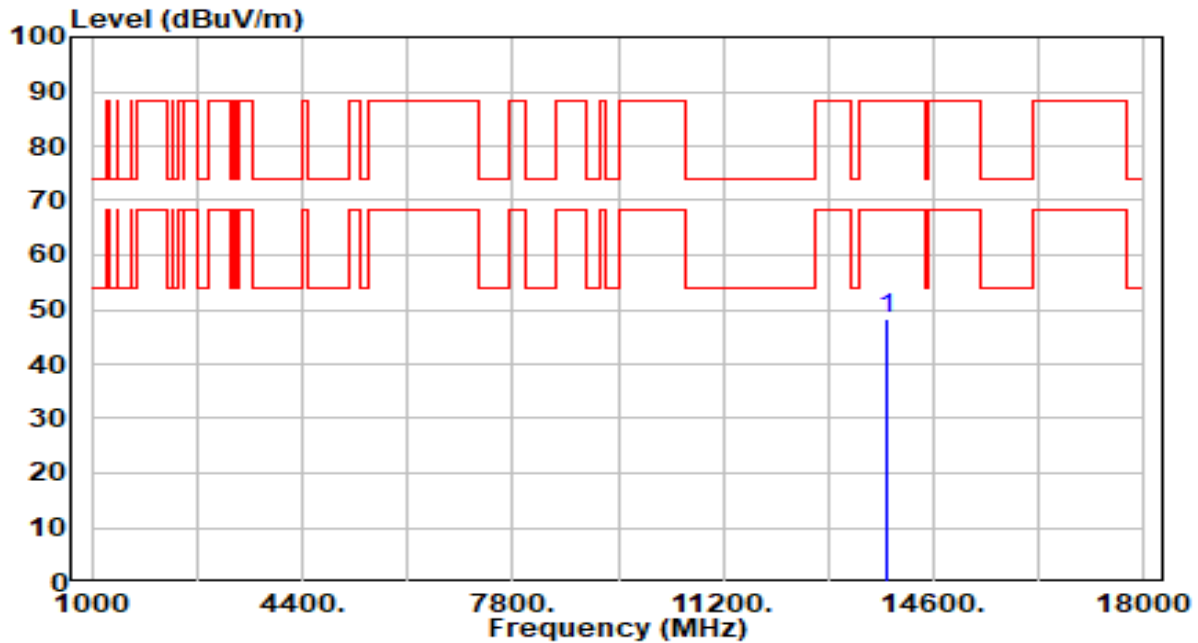


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13850.000     | 43.17          | 5.07       | 48.24                | -39.96      | 88.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 195_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

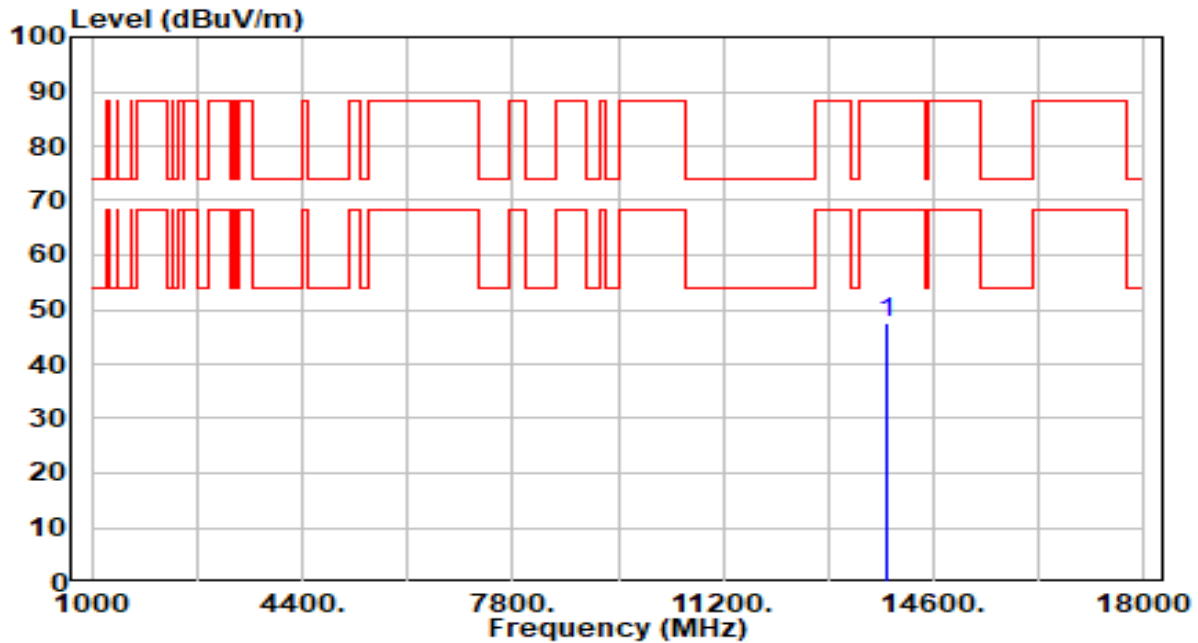


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13850.000     | 42.34          | 5.07       | 47.41                | -40.79      | 88.20          | 100         | 34          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 211_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

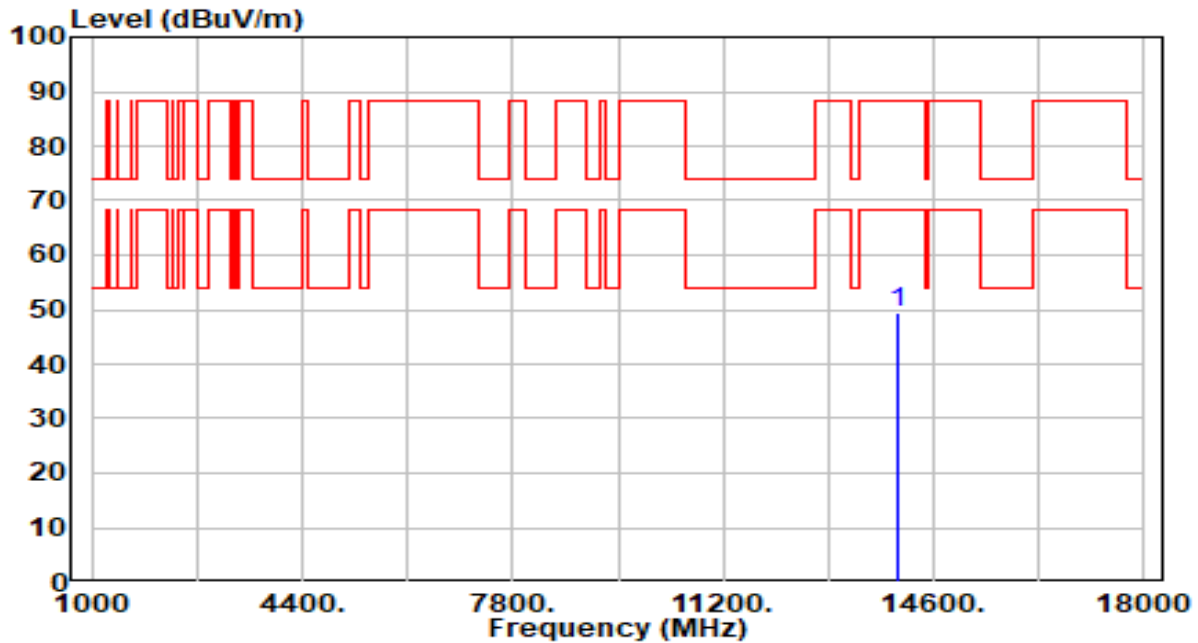


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14010.000     | 44.08          | 5.17       | 49.25                | -38.95      | 88.20          | 100         | 304         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 211_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

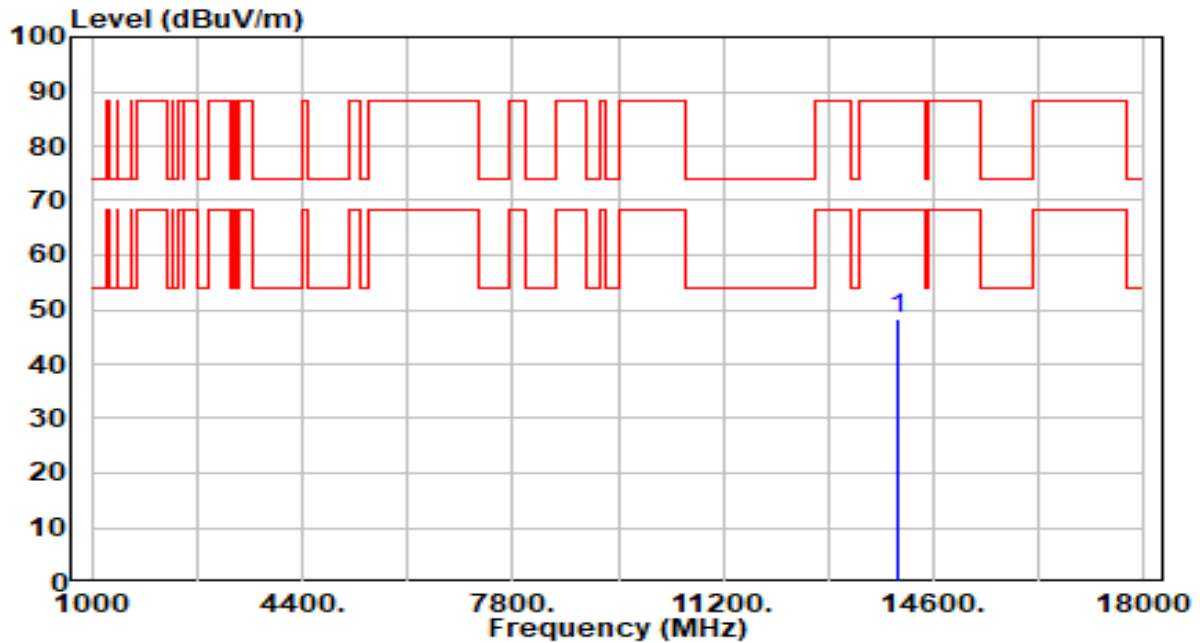


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14010.000     | 43.28          | 5.17       | 48.45                | -39.75      | 88.20          | 100         | 314         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

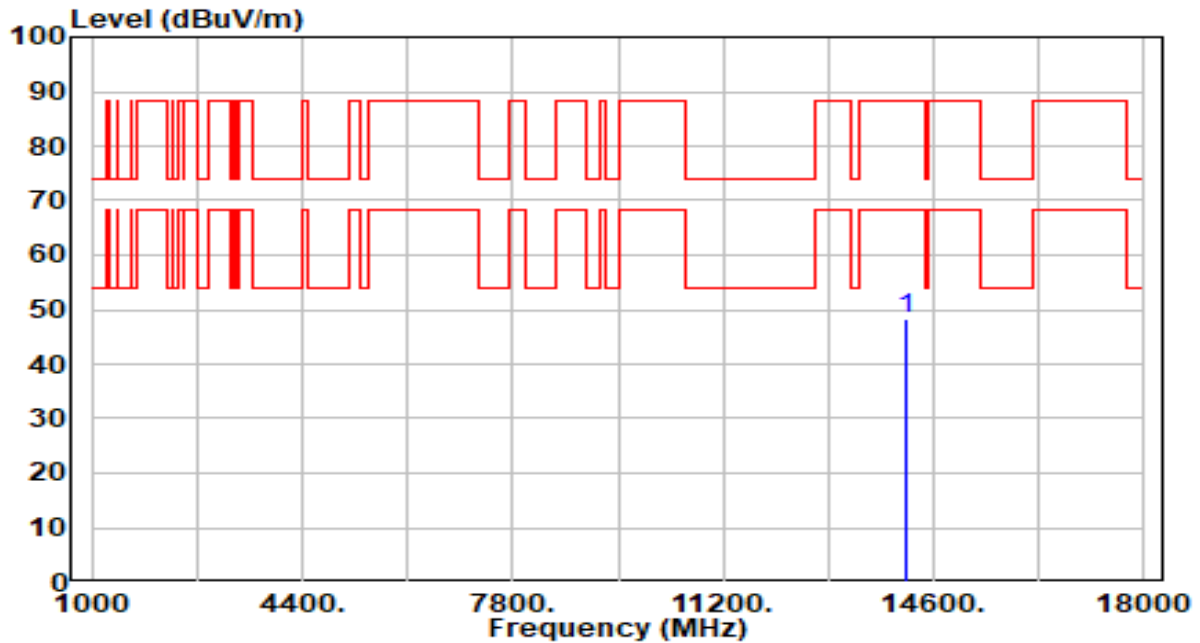


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14170.000     | 43.39          | 5.10       | 48.48                | -39.72      | 88.20          | 100         | 174         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

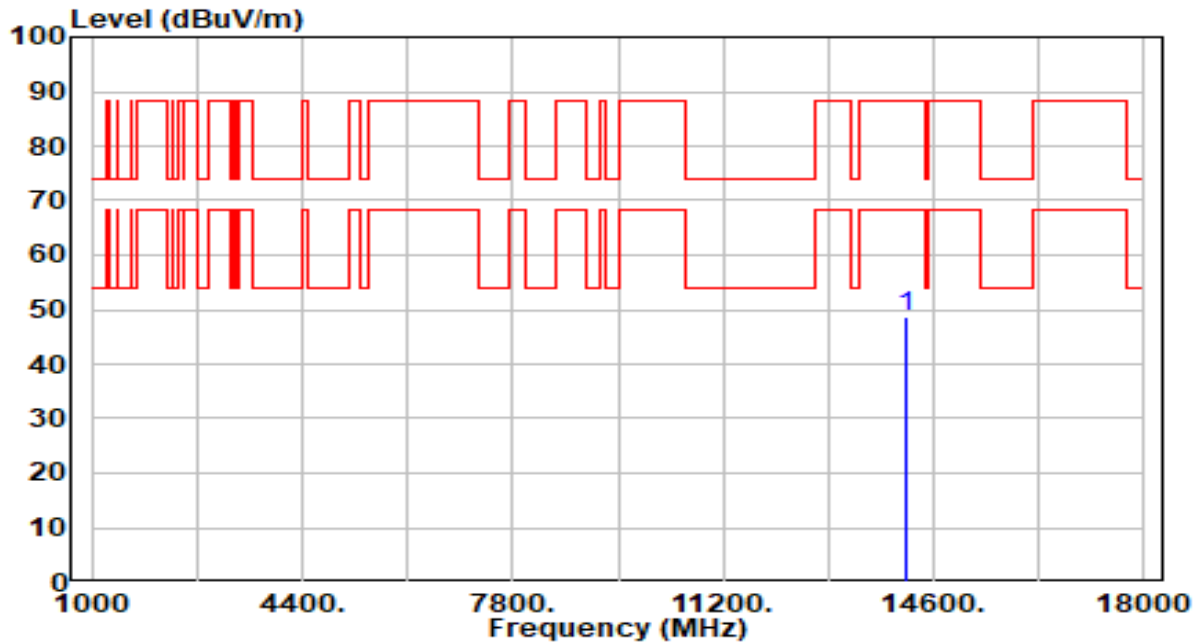


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14170.000     | 43.44          | 5.10       | 48.53                | -39.67      | 88.20          | 0           | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 7_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

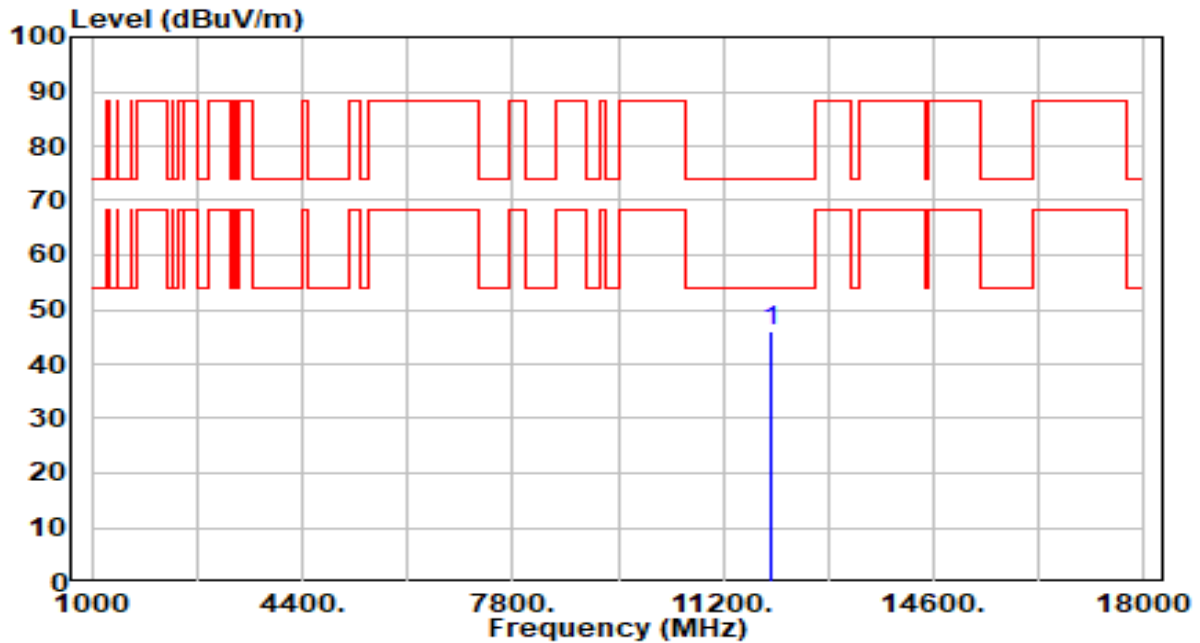


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 11970.000     | 42.00          | 3.87       | 45.87                | -28.13      | 74.00          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 7_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

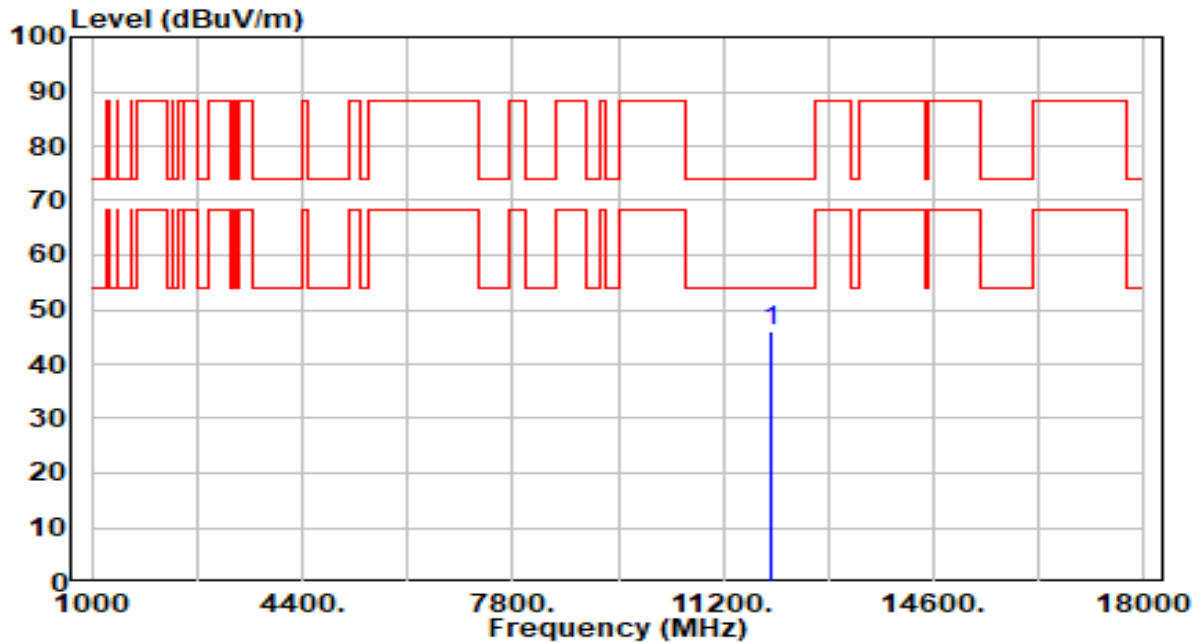


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 11970.000     | 42.06          | 3.87       | 45.93                | -28.07      | 74.00          | 100         | 64          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

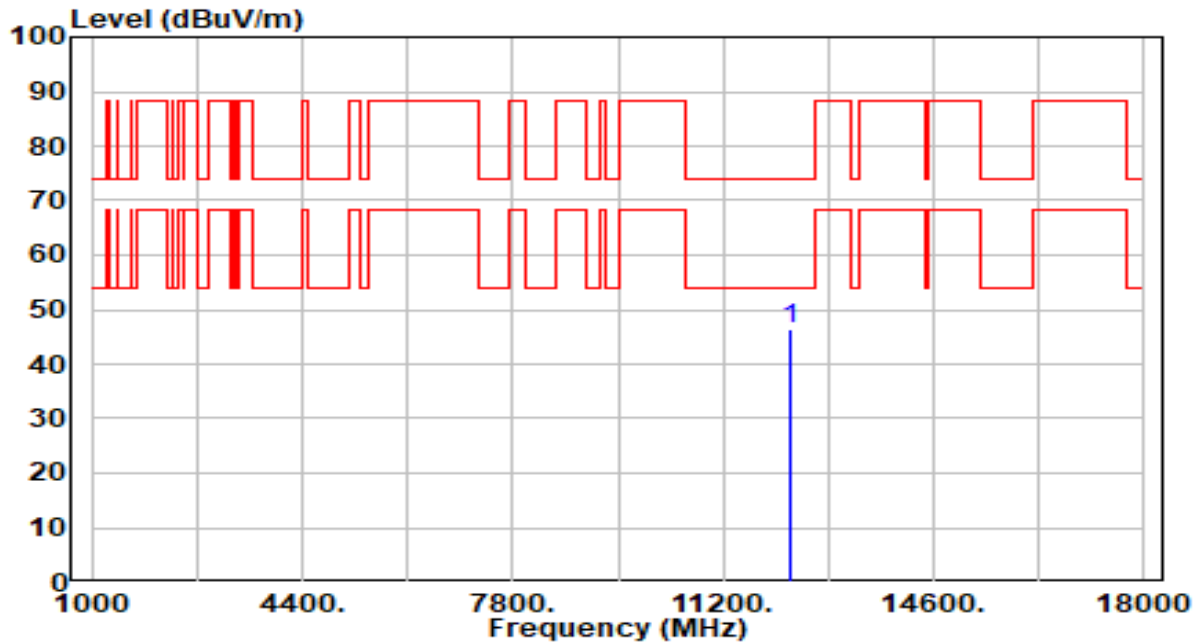


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12290.000     | 42.12          | 4.41       | 46.53                | -27.47      | 74.00          | 100         | 78          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

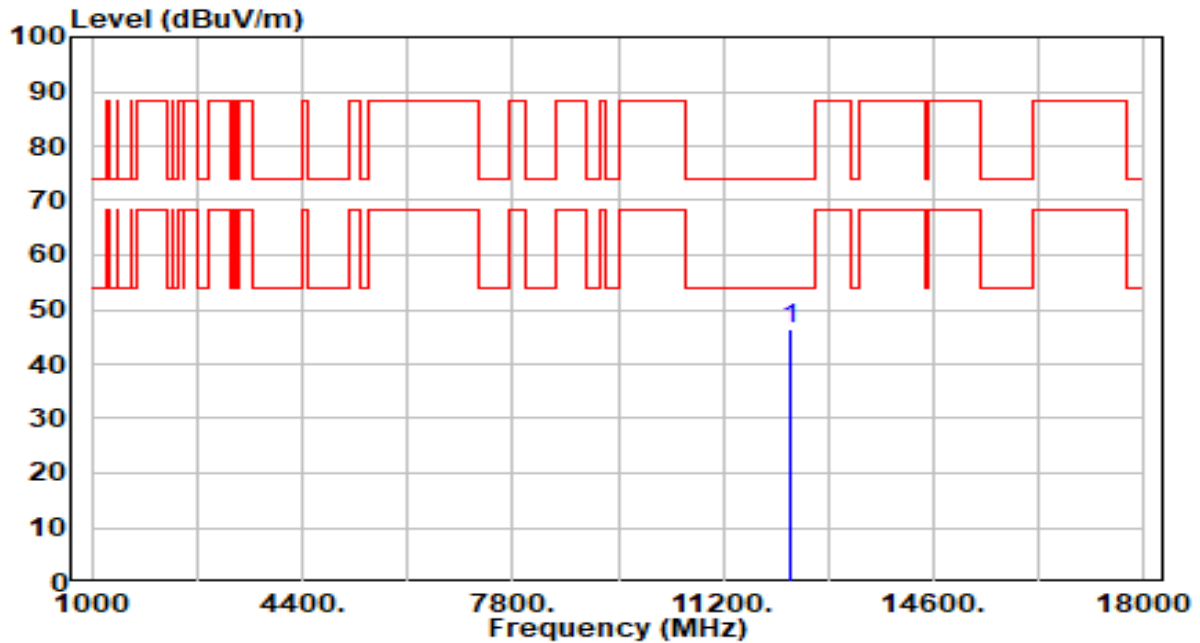


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12290.000     | 42.01          | 4.41       | 46.42                | -27.58      | 74.00          | 100         | 140         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 87_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

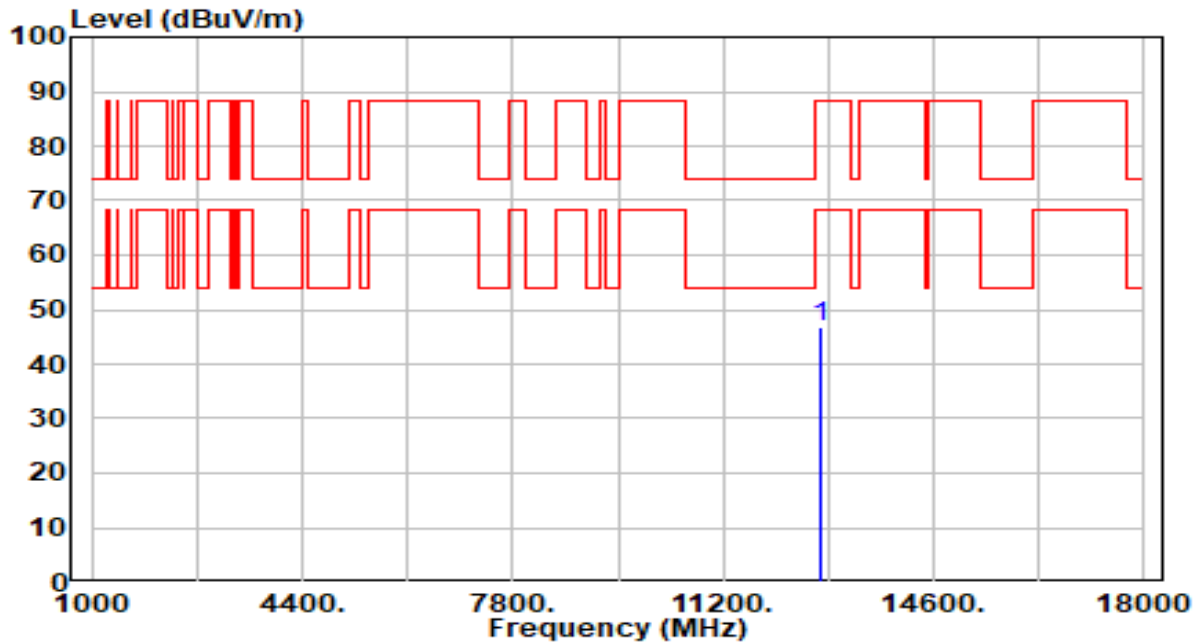


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12770.000     | 41.65          | 5.28       | 46.94                | -41.26      | 88.20          | 100         | 29          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 87_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

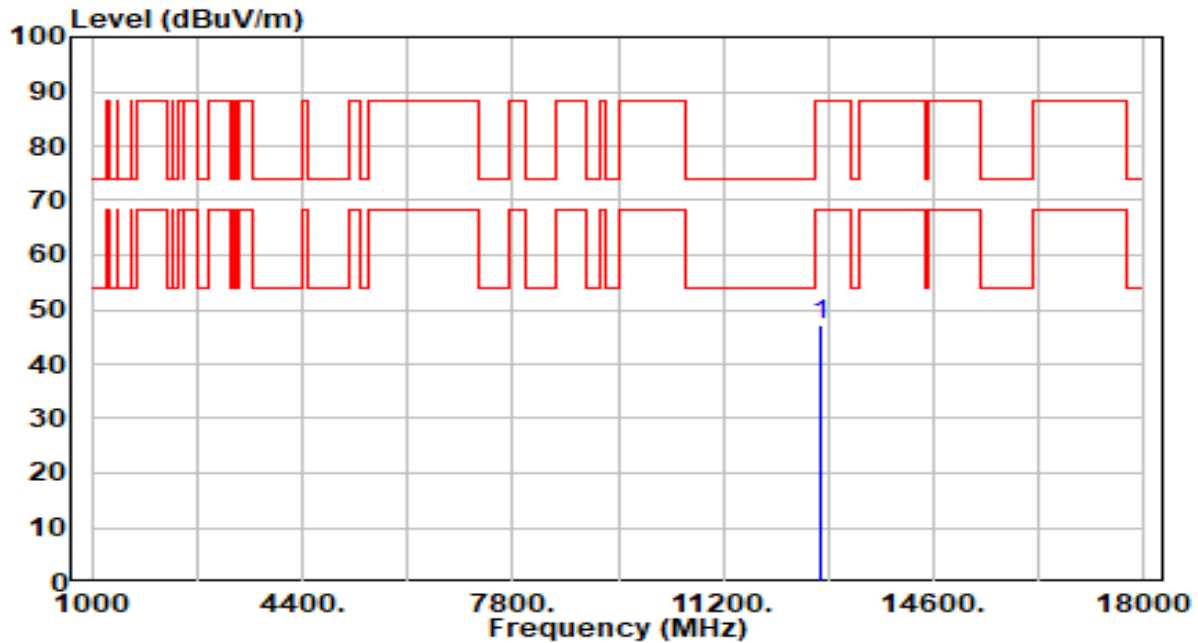


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12770.000     | 41.75          | 5.28       | 47.04                | -41.16      | 88.20          | 100         | 221         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band6_CH 103_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

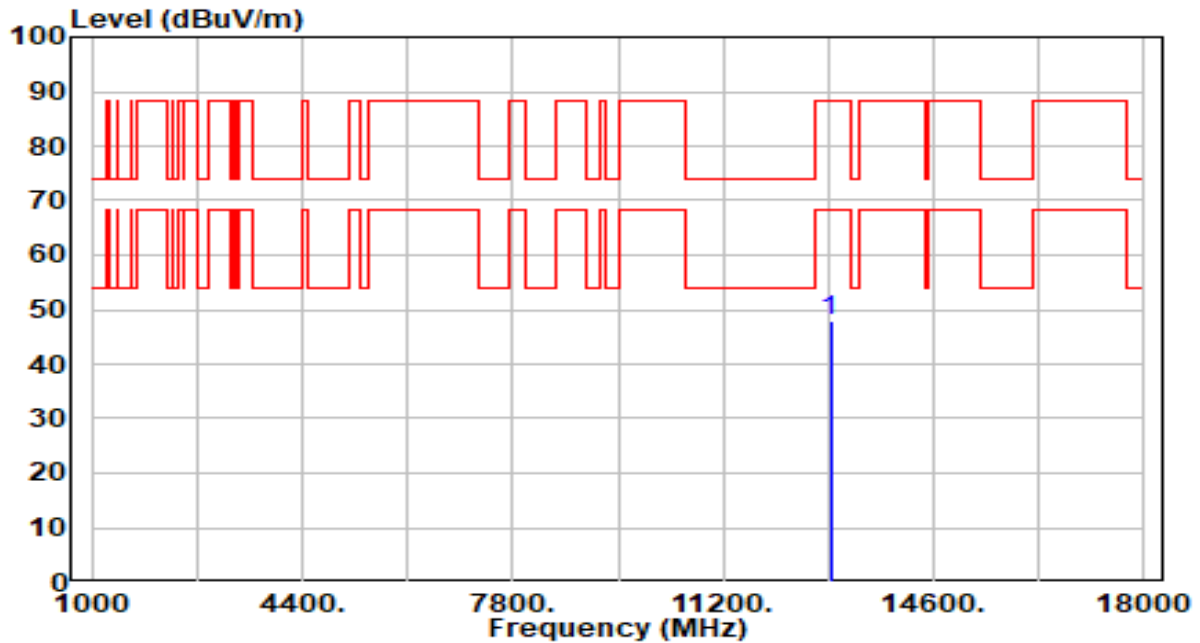


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12930.000     | 42.49          | 5.26       | 47.75                | -40.45      | 88.20          | 100         | 182         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band6_CH 103_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

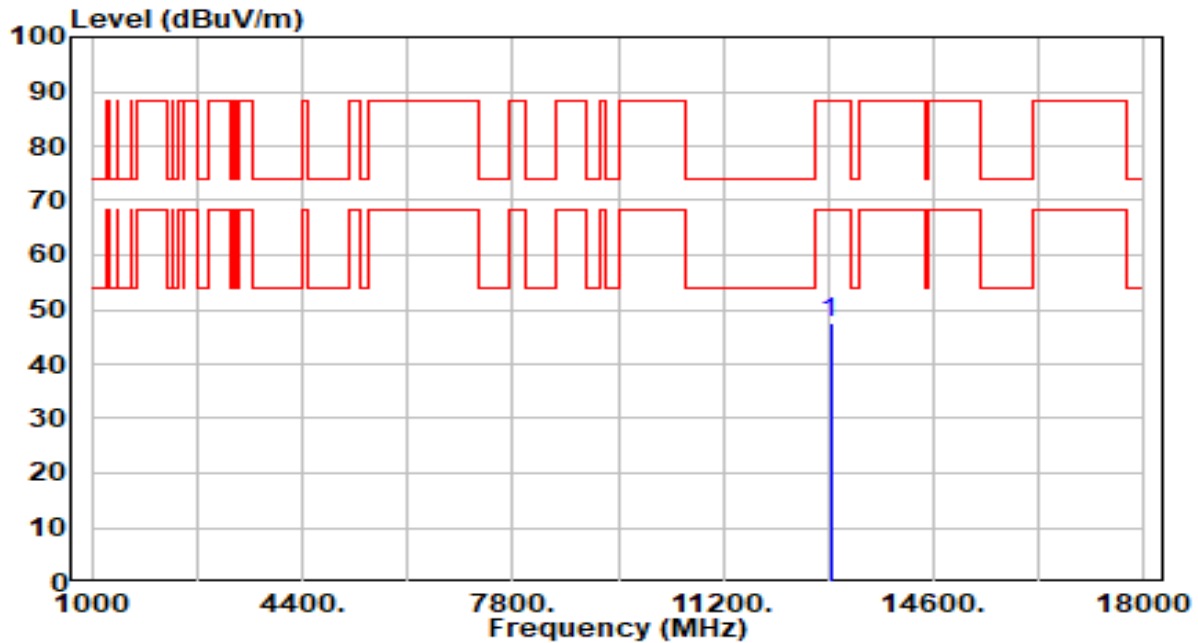


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 12930.000          | 42.34             | 5.26          | 47.60                   | -40.60         | 88.20             | 100            | 178            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 119_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

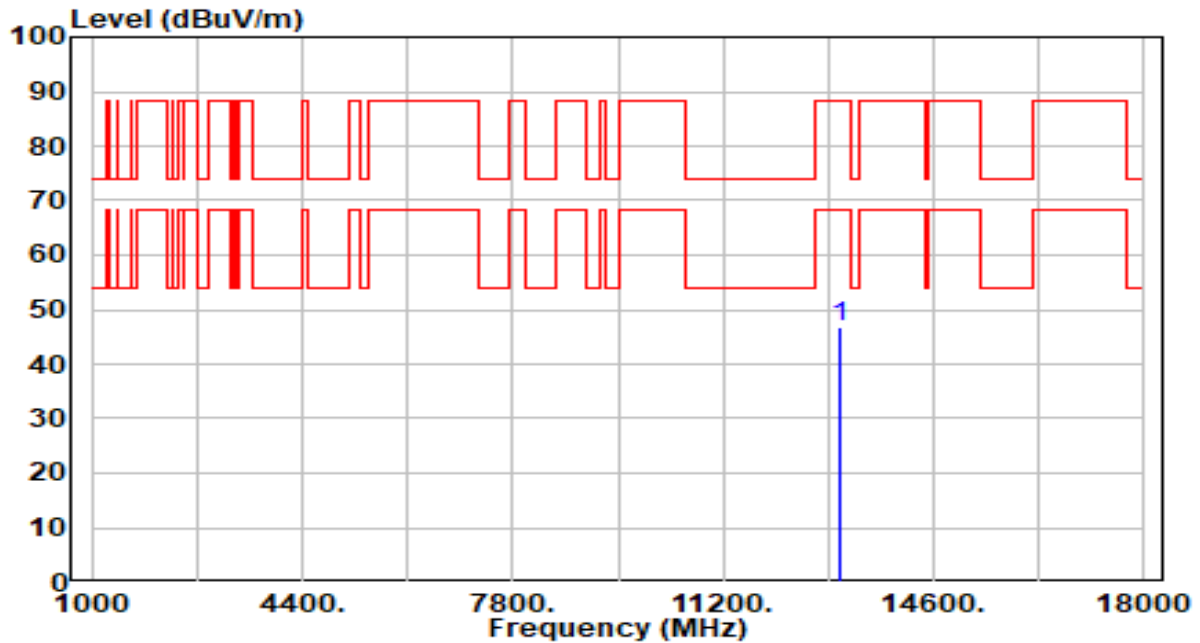


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13090.000     | 41.69          | 5.22       | 46.92                | -41.28      | 88.20          | 100         | 228         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 119_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

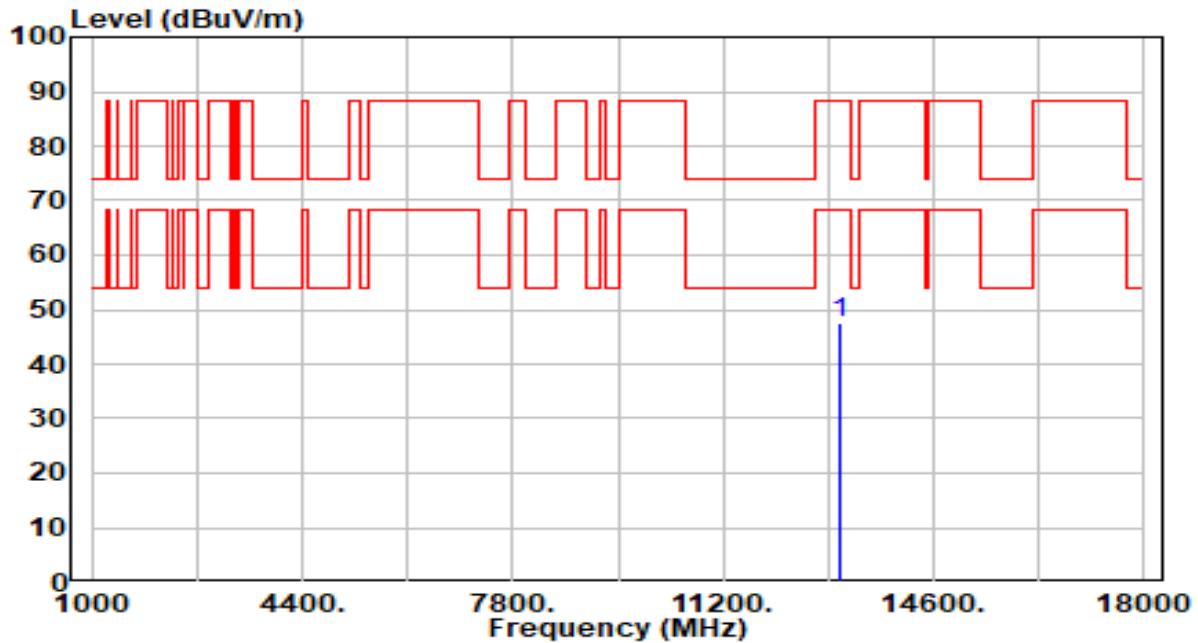


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13090.000     | 42.43          | 5.22       | 47.65                | -40.55      | 88.20          | 100         | 136         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 135_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

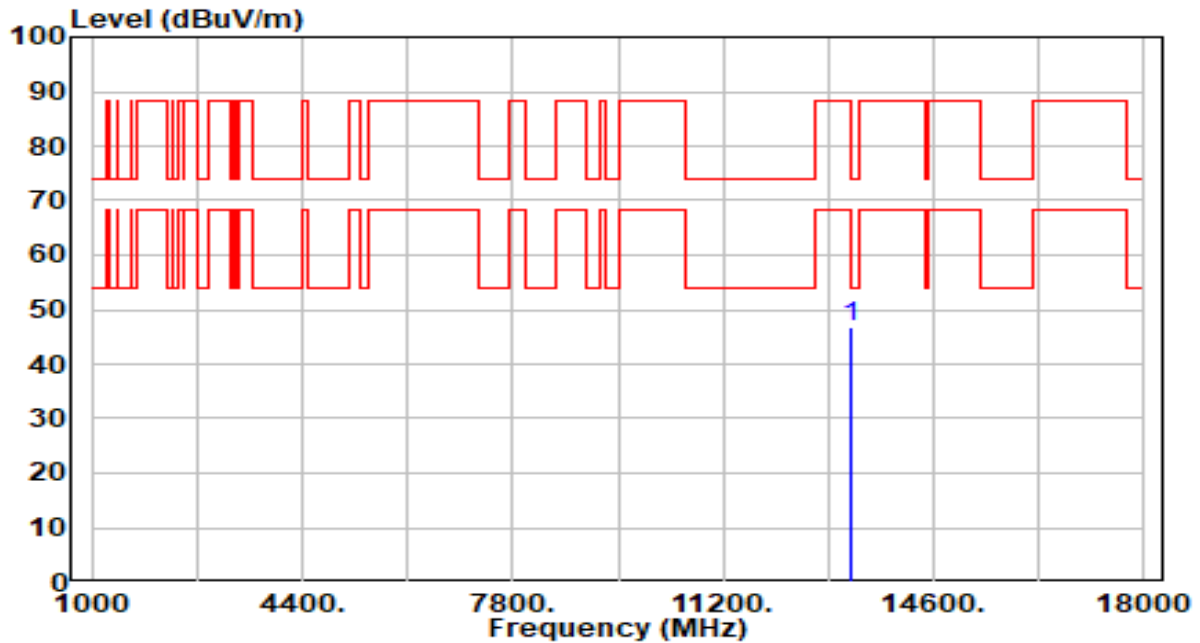


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13250.000     | 41.55          | 5.22       | 46.77                | -27.23      | 74.00          | 100         | 284         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 135_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

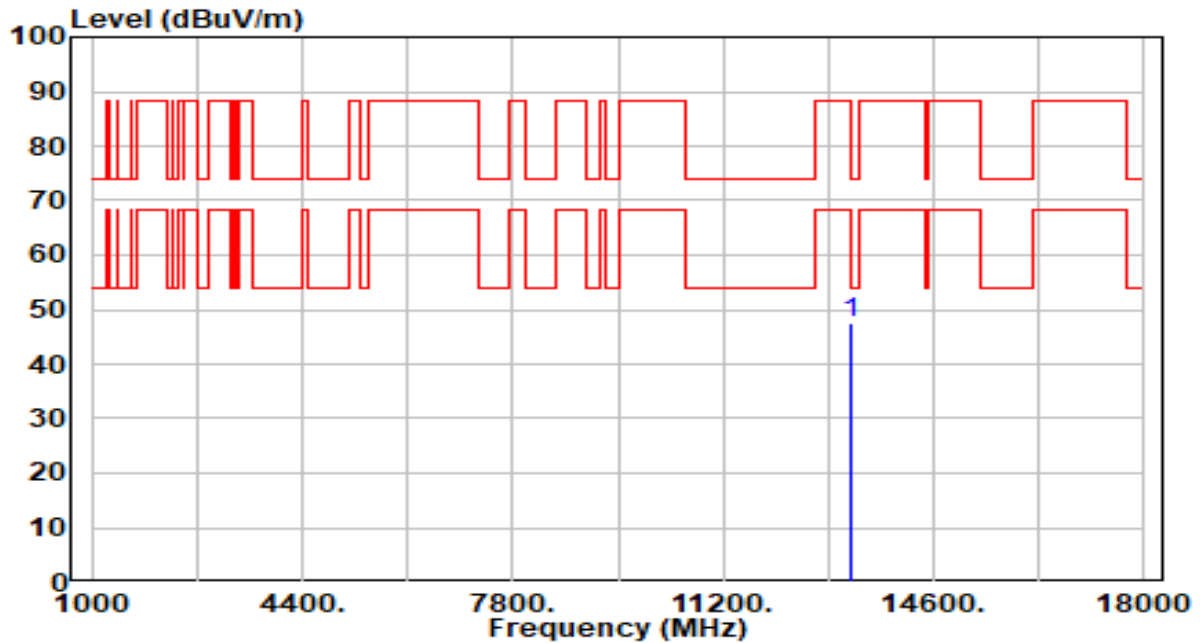


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13250.000     | 42.30          | 5.22       | 47.51                | -26.49      | 74.00          | 100         | 159         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 151_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

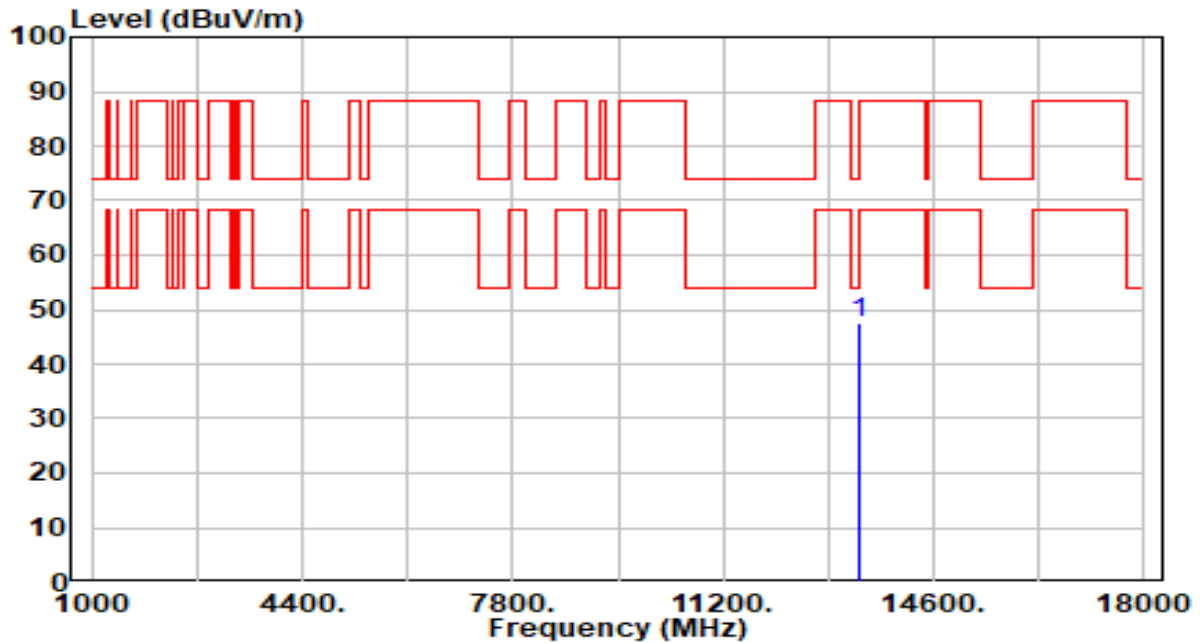


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13410.000     | 42.31          | 5.25       | 47.57                | -40.63      | 88.20          | 100         | 345         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 151_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

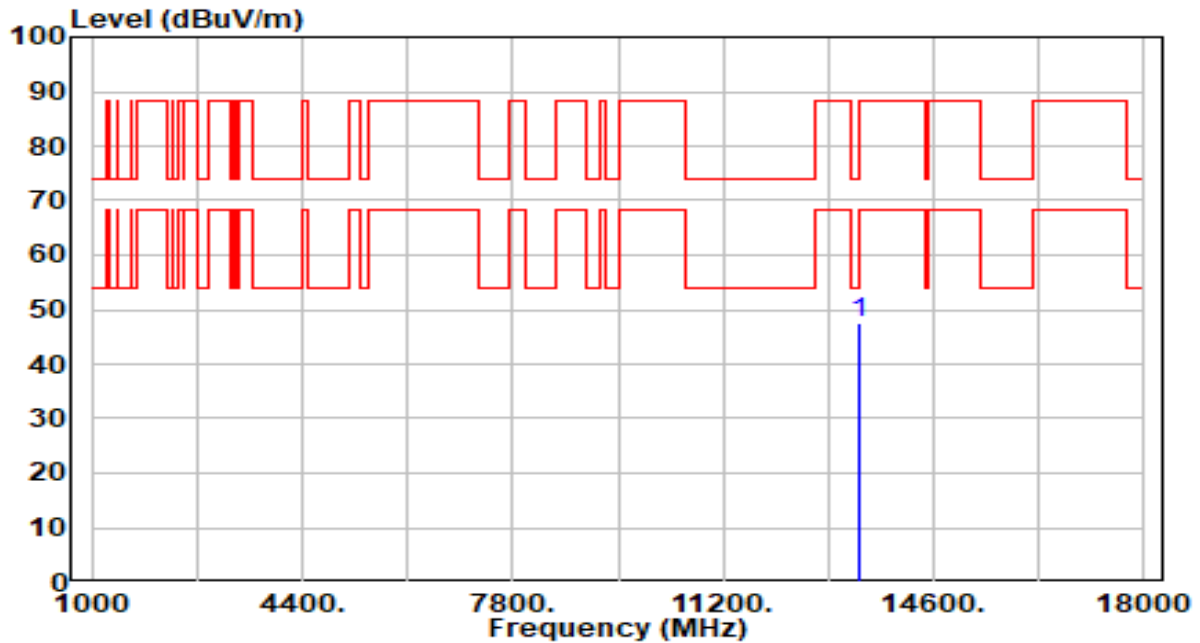


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13410.000     | 42.14          | 5.25       | 47.39                | -40.81      | 88.20          | 100         | 306         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 167_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

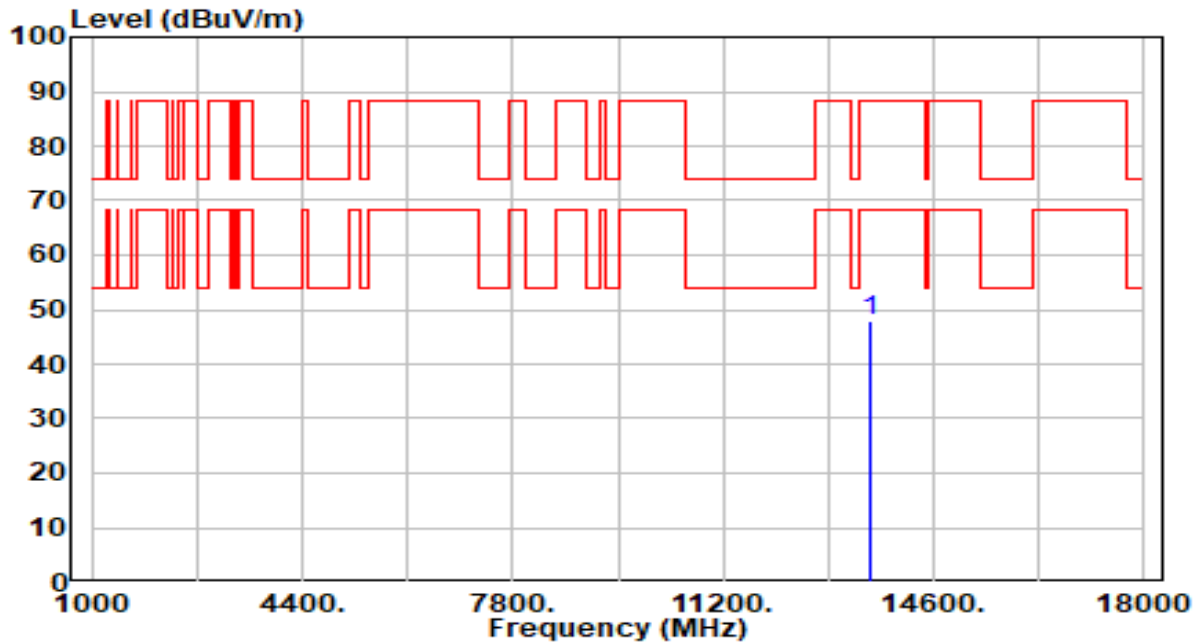


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13570.000     | 42.82          | 5.06       | 47.88                | -40.32      | 88.20          | 100         | 49          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 167_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

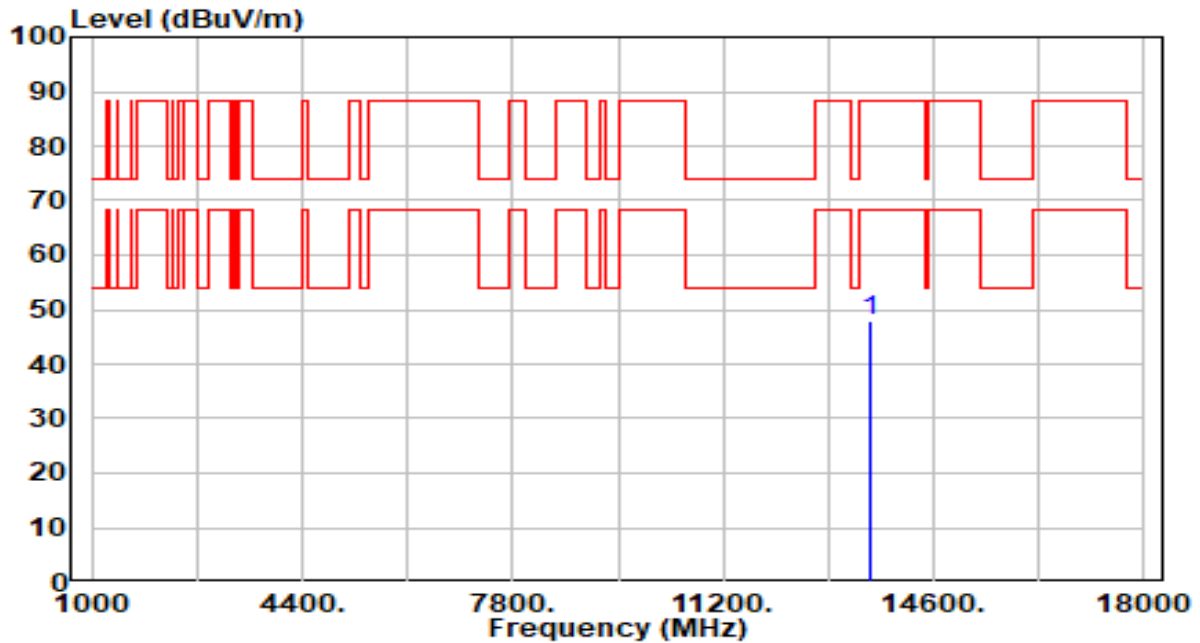


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13570.000     | 43.04          | 5.06       | 48.10                | -40.10      | 88.20          | 100         | 22          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 183_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

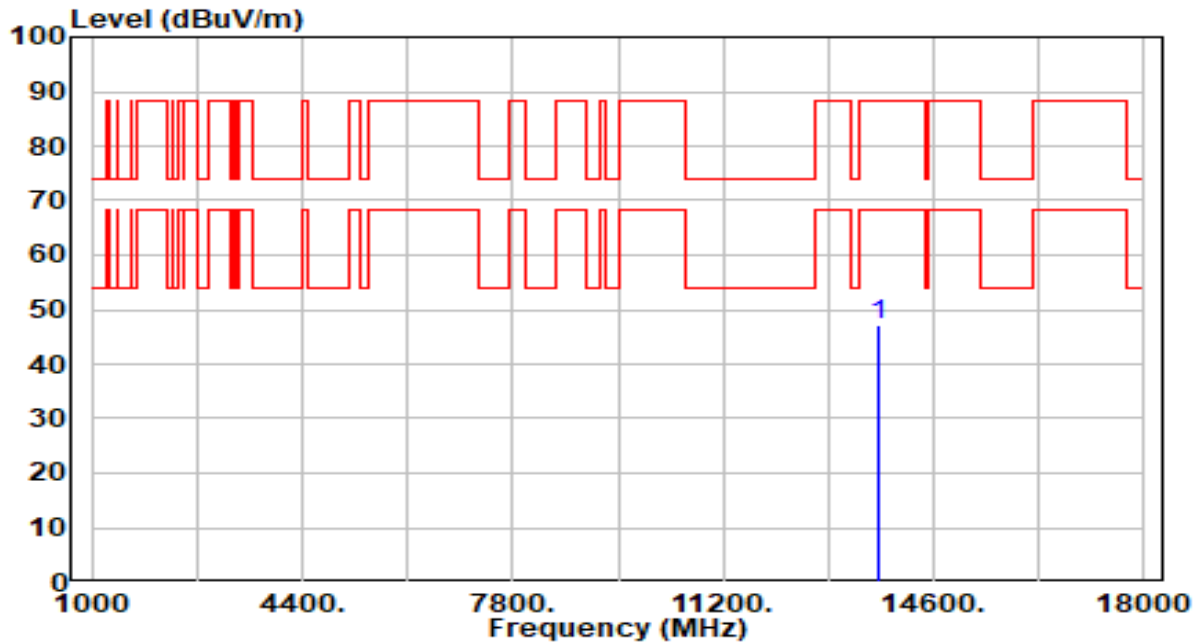


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13730.000     | 42.32          | 5.03       | 47.35                | -40.85      | 88.20          | 0           | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 183_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

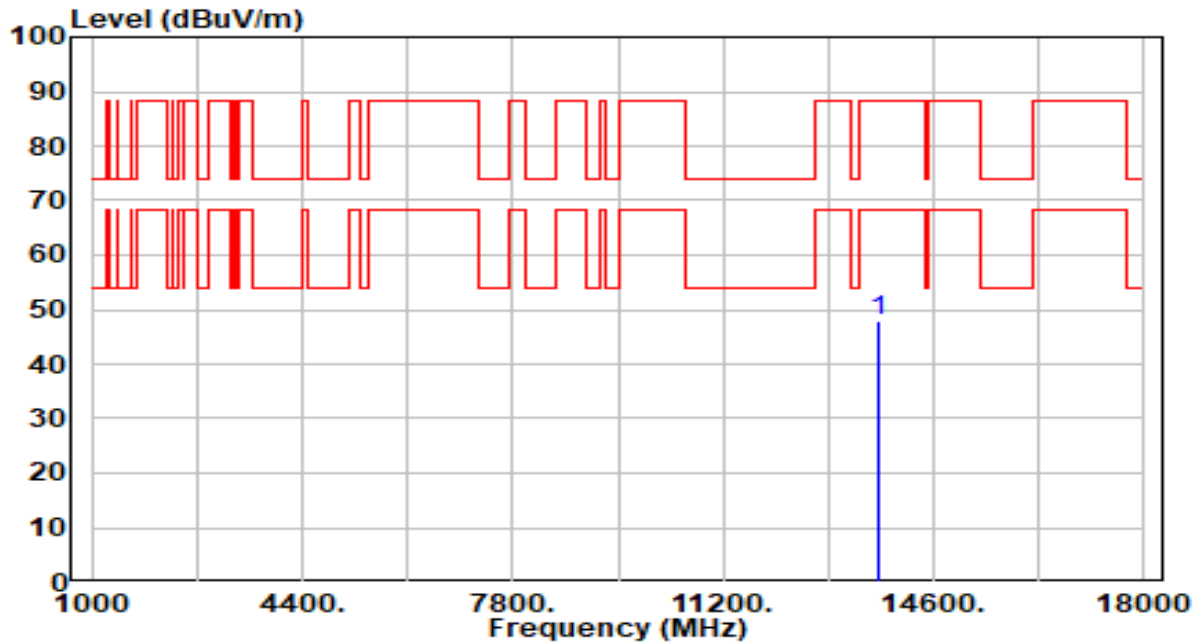


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13730.000     | 42.90          | 5.03       | 47.93                | -40.27      | 88.20          | 100         | 20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 199_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

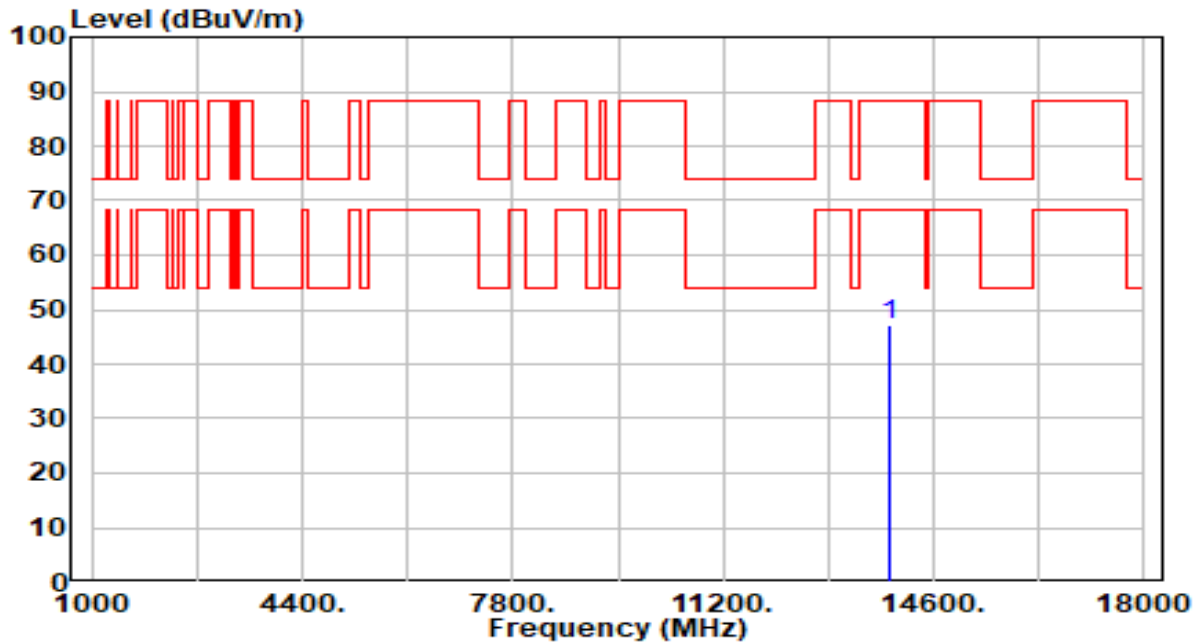


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 13890.000       | 41.96          | 5.10       | 47.05                | -41.15      | 88.20          | 100         | 321         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 199_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

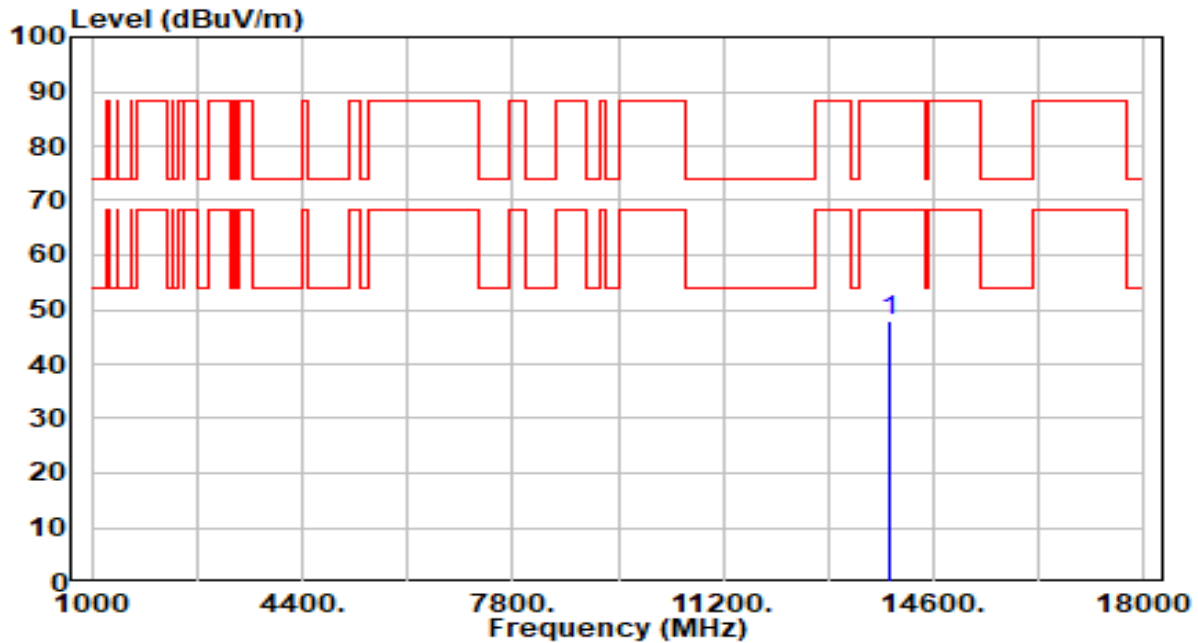


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13890.000     | 42.69          | 5.10       | 47.79                | -40.41      | 88.20          | 100         | 200         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

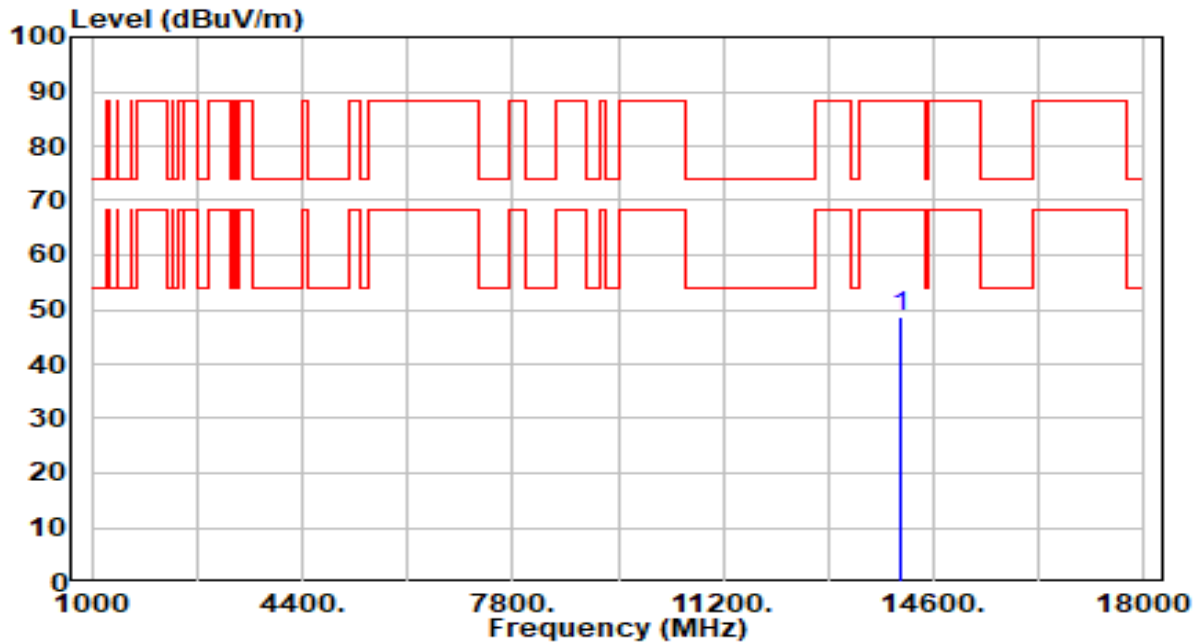


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 14050.000       | 43.40          | 5.15       | 48.55                | -39.65      | 88.20          | 100         | 322         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

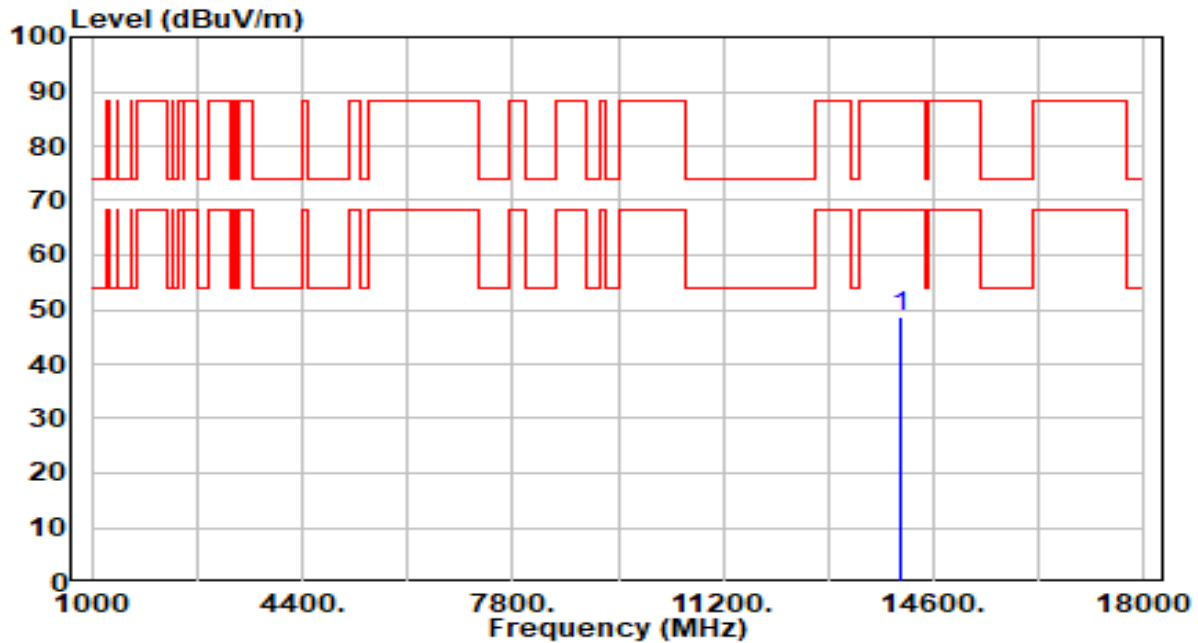


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14050.000     | 43.56          | 5.15       | 48.71                | -39.49      | 88.20          | 100         | 148         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 15_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

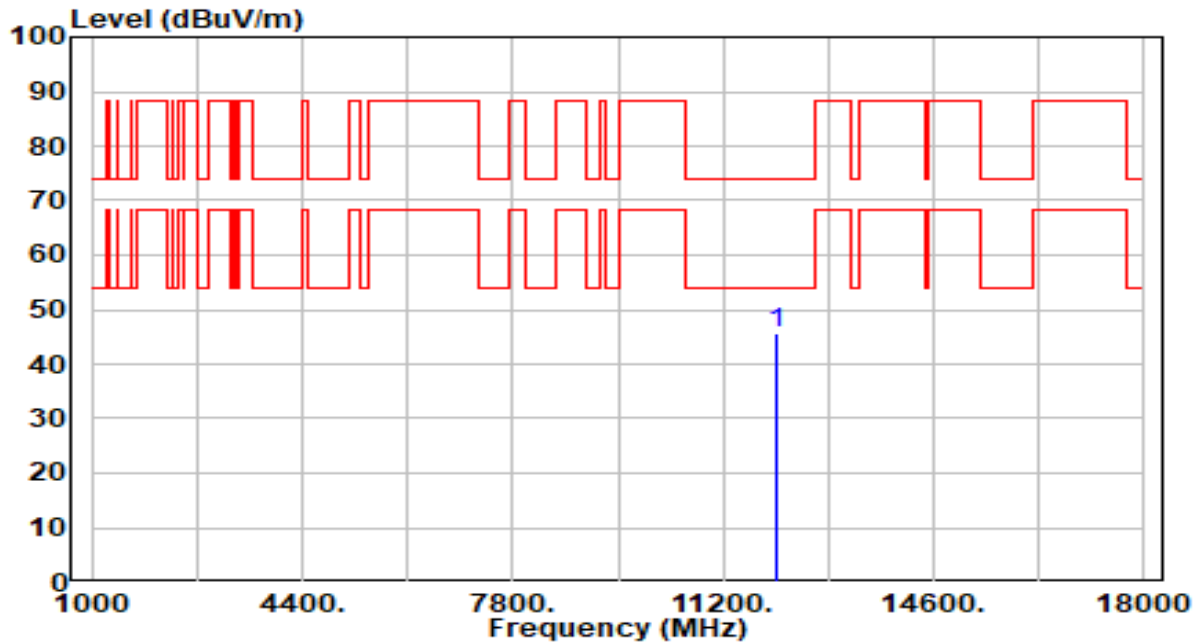


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12050.000     | 41.78          | 4.01       | 45.79                | -28.21      | 74.00          | 100         | 95          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 15_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

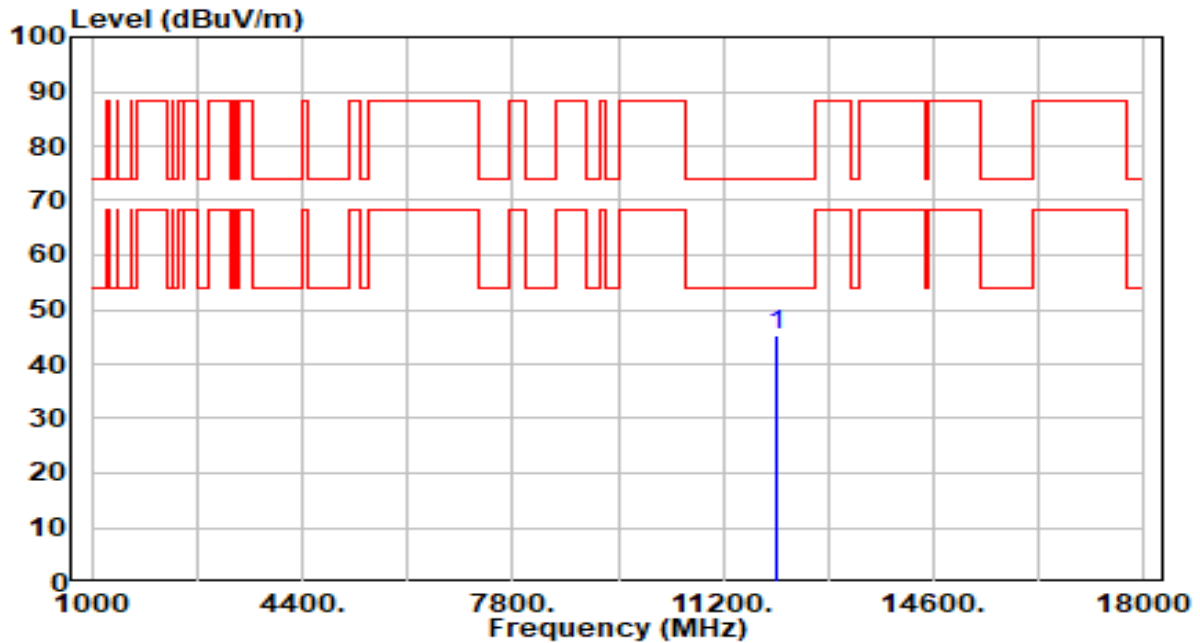


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12050.000     | 41.43          | 4.01       | 45.45                | -28.55      | 74.00          | 100         | 261         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

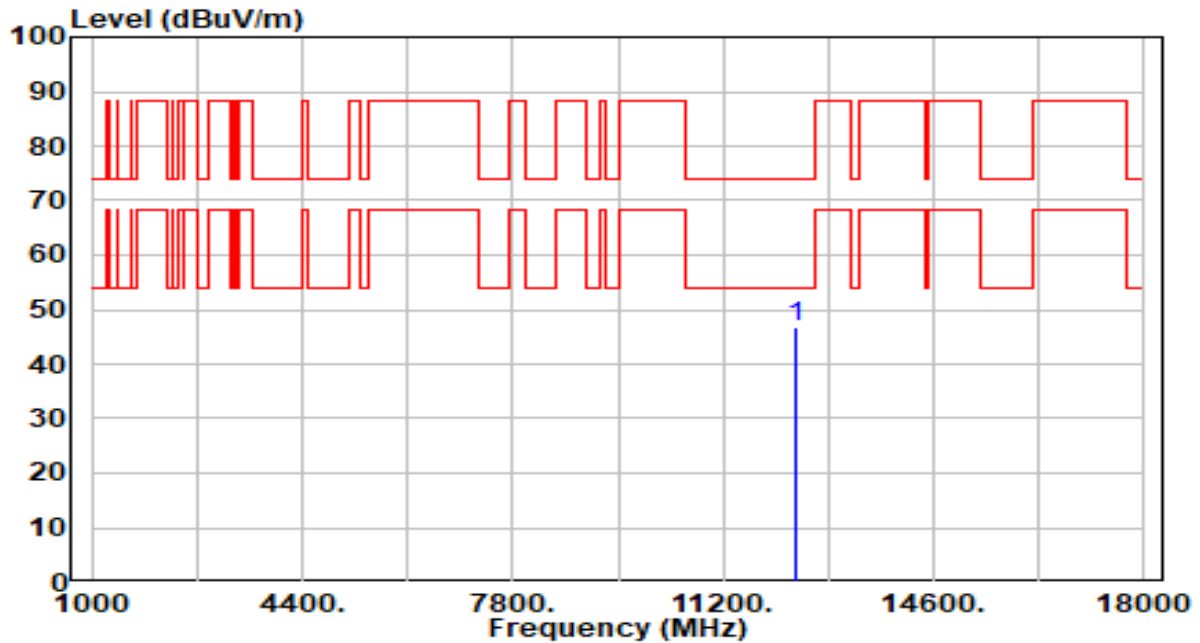


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12370.000     | 42.25          | 4.52       | 46.77                | -27.23      | 74.00          | 100         | 338         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

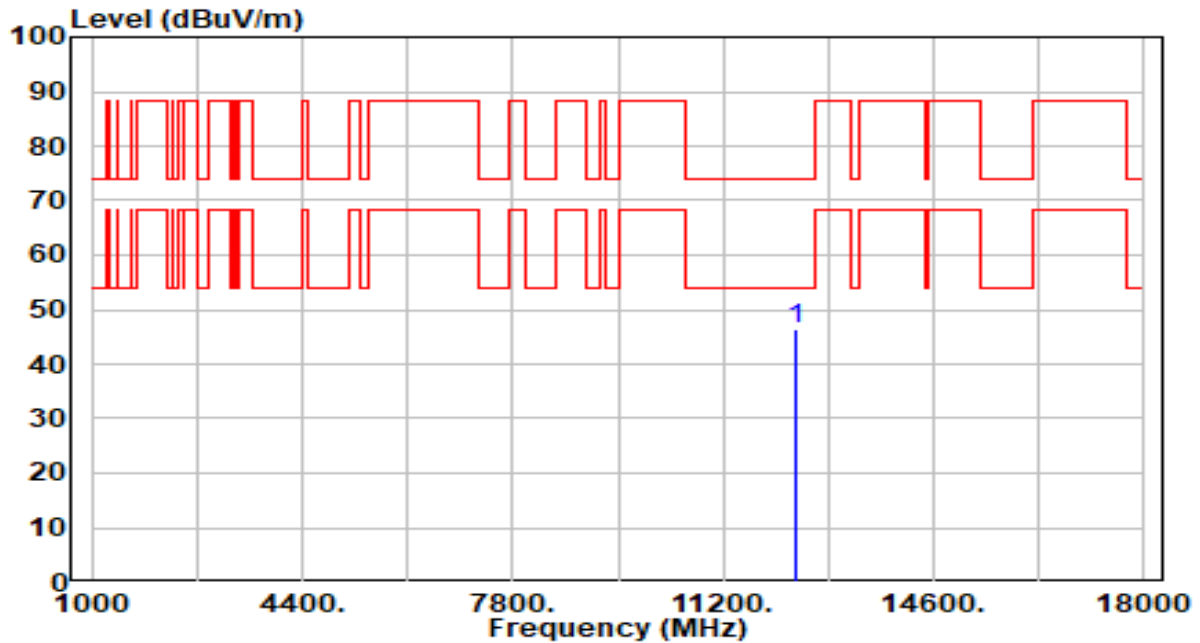


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 12370.000          | 41.94             | 4.52          | 46.46                   | -27.54         | 74.00             | 100            | 161            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 79_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

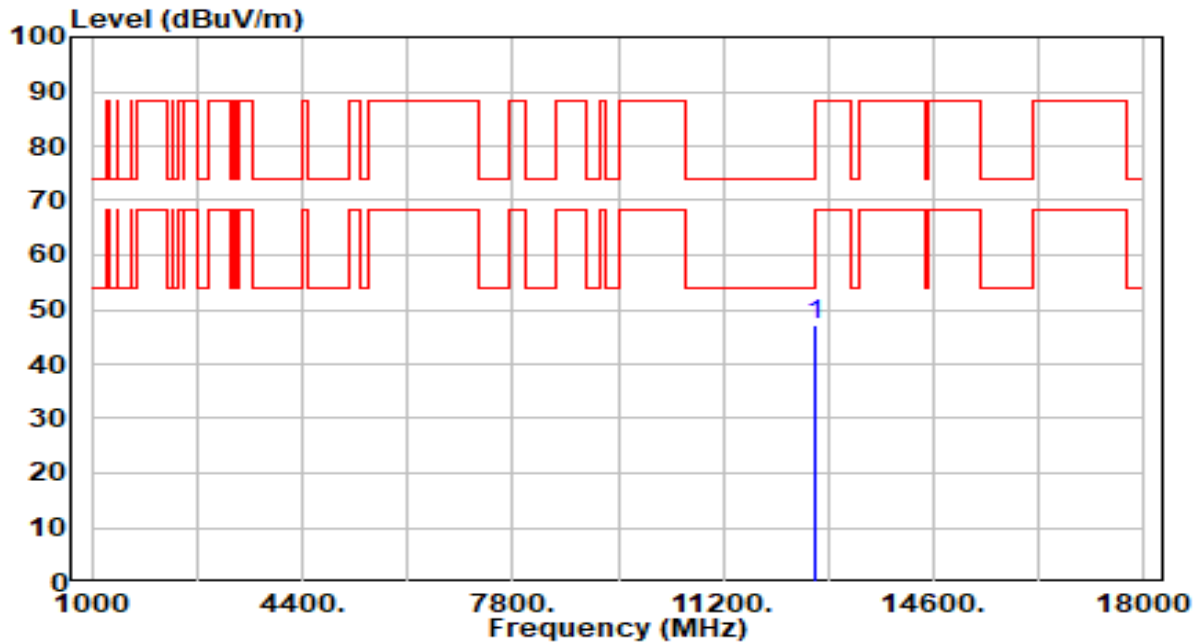


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12690.000     | 41.98          | 5.23       | 47.21                | -26.79      | 74.00          | 100         | 40          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 79_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

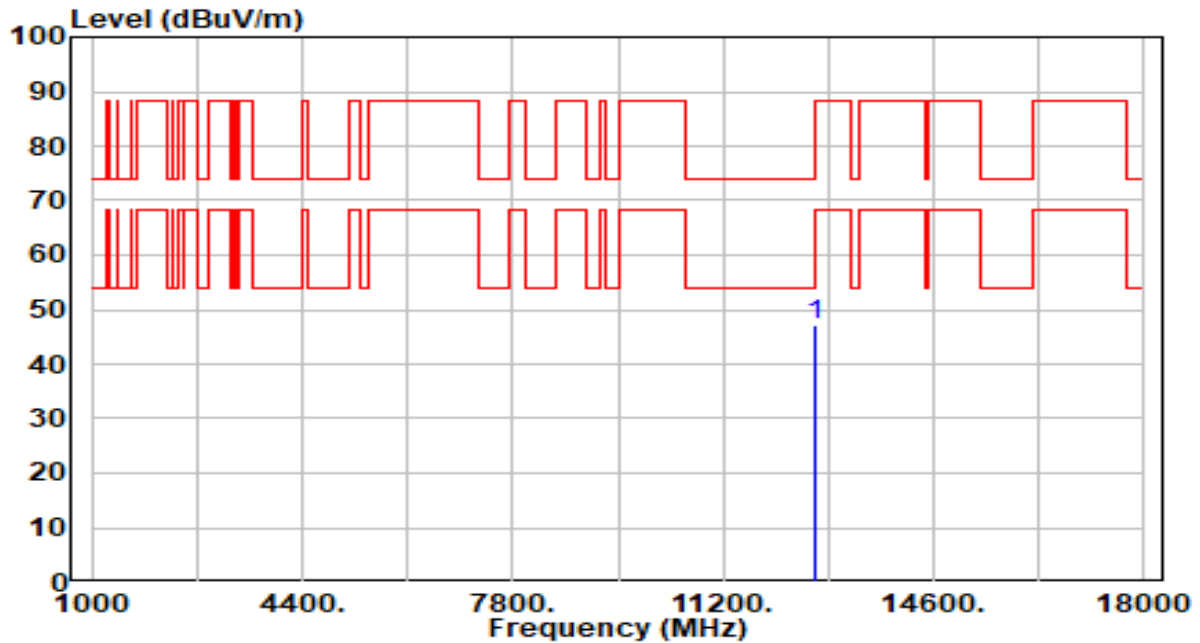


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12690.000     | 41.98          | 5.23       | 47.20                | -26.80      | 74.00          | 100         | 129         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band6_CH 111_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

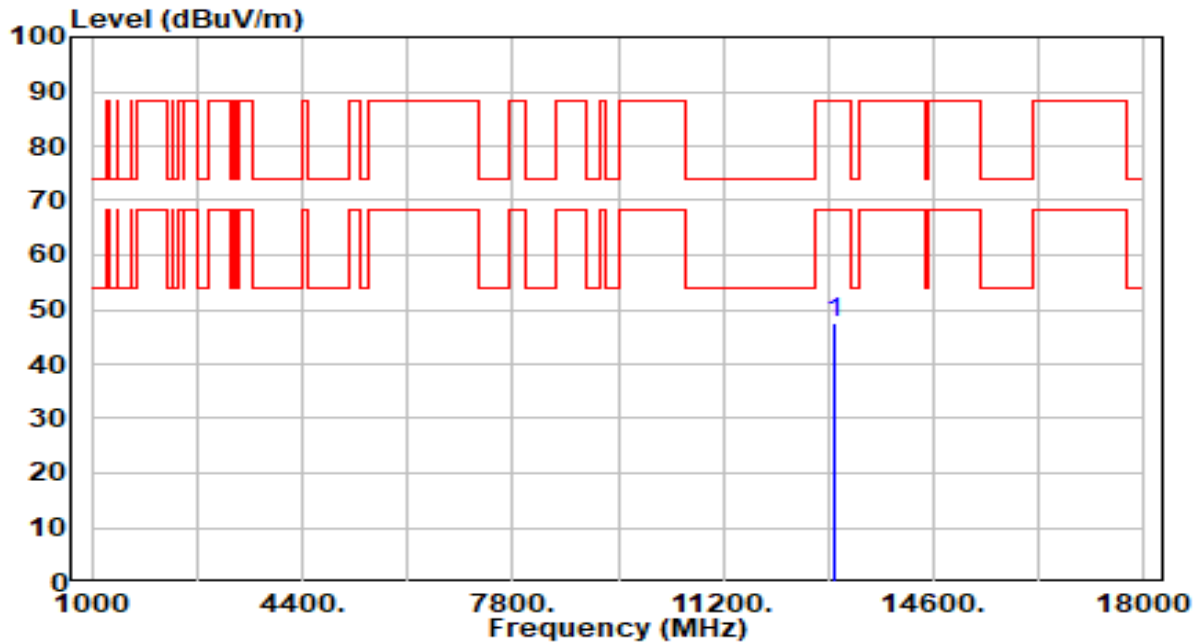


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 13010.000       | 42.44          | 5.24       | 47.68                | -40.52      | 88.20          | 100         | 208         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band6_CH 111_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

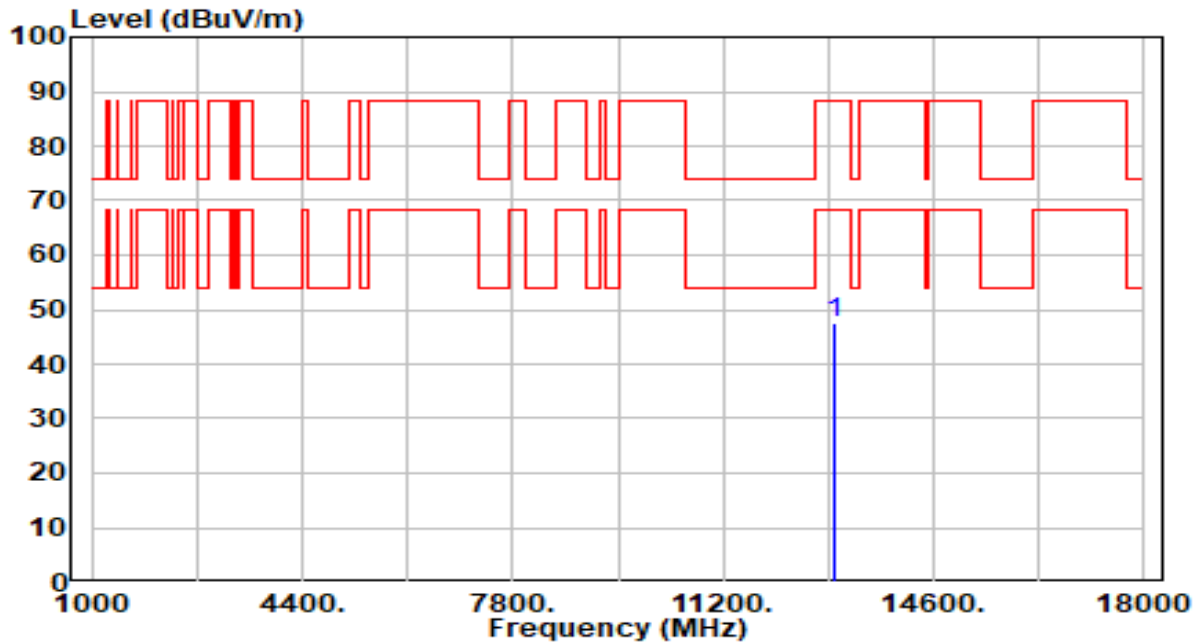


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13010.000     | 42.36          | 5.24       | 47.60                | -40.60      | 88.20          | 100         | 41          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band7_CH 143_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

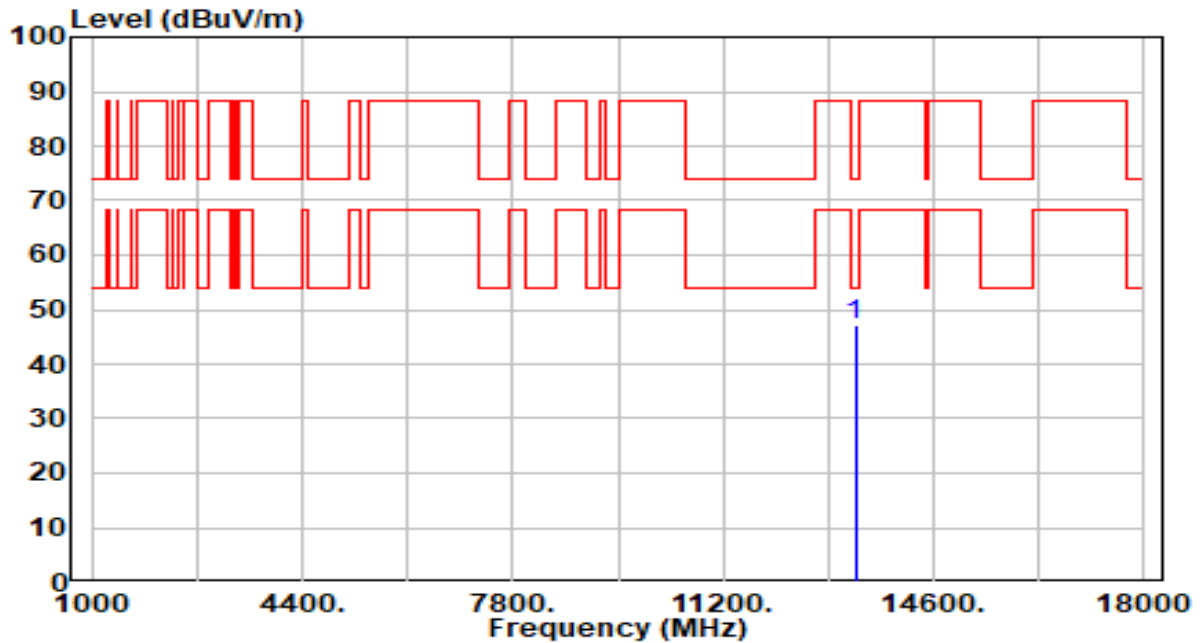


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13330.000     | 42.05          | 5.24       | 47.29                | -26.71      | 74.00          | 100         | 119         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band7_CH 143_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

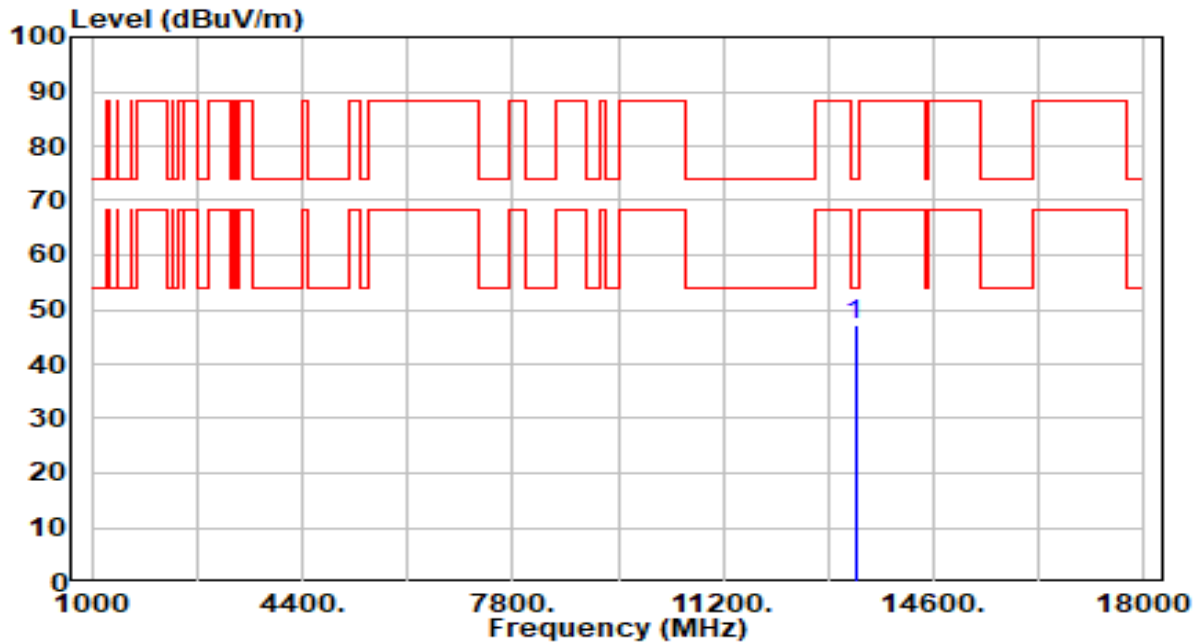


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13330.000     | 41.87          | 5.24       | 47.10                | -26.90      | 74.00          | 100         | 25          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band7_CH 175_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

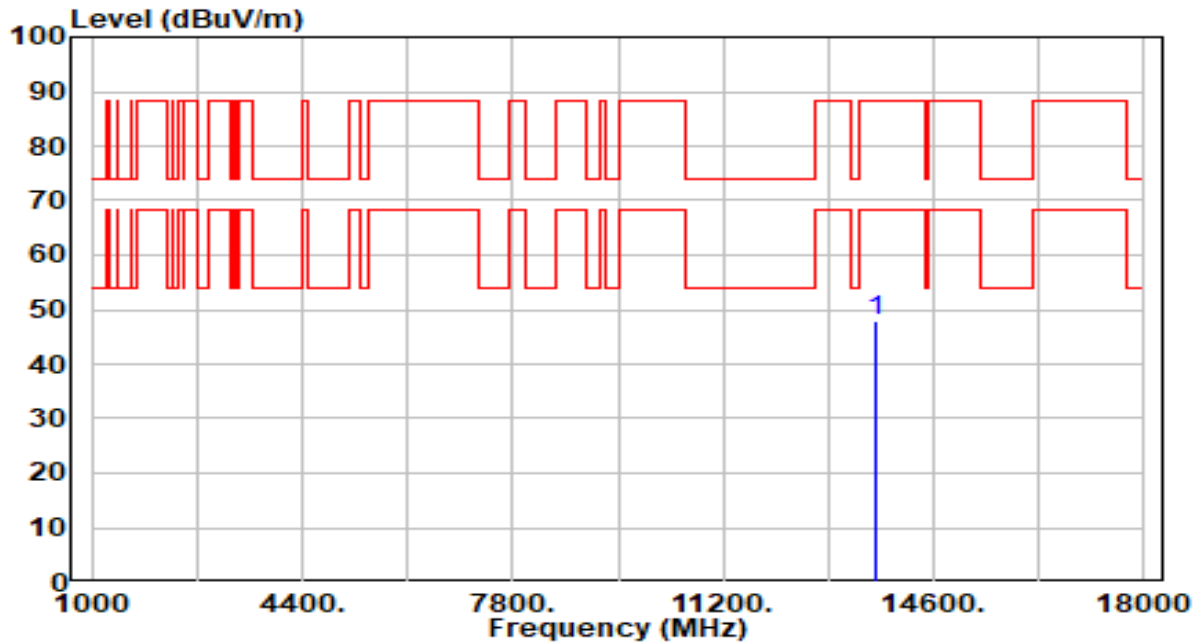


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13650.000     | 42.77          | 5.01       | 47.78                | -40.42      | 88.20          | 100         | 245         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band7_CH 175_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

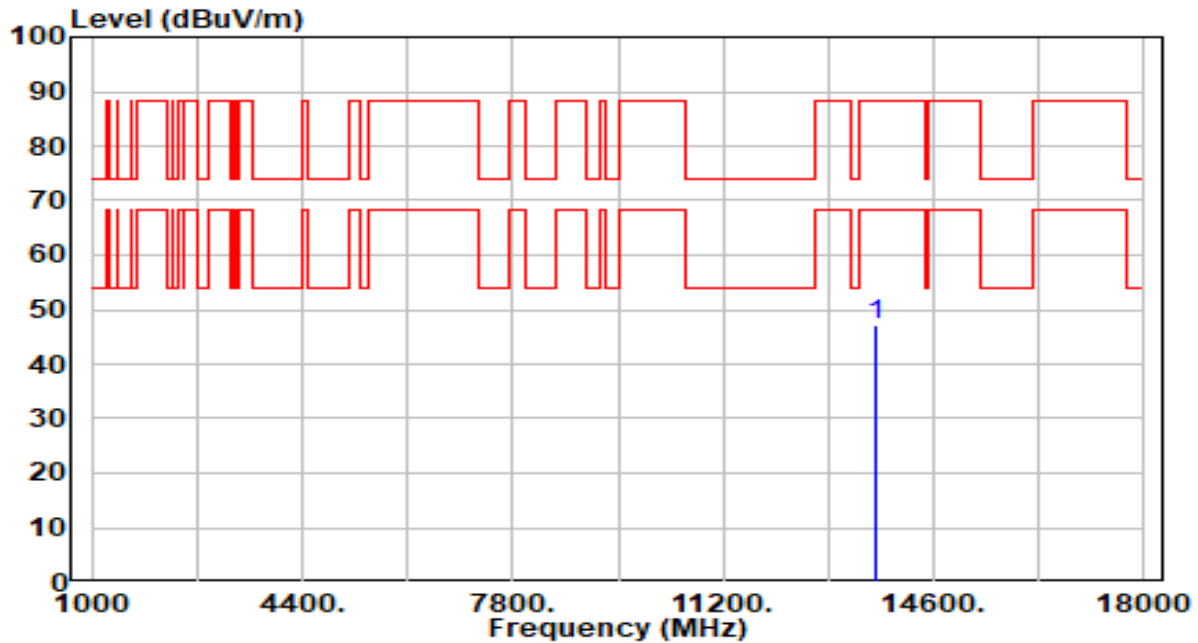


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13650.000     | 42.15          | 5.01       | 47.16                | -41.04      | 88.20          | 100         | 82          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

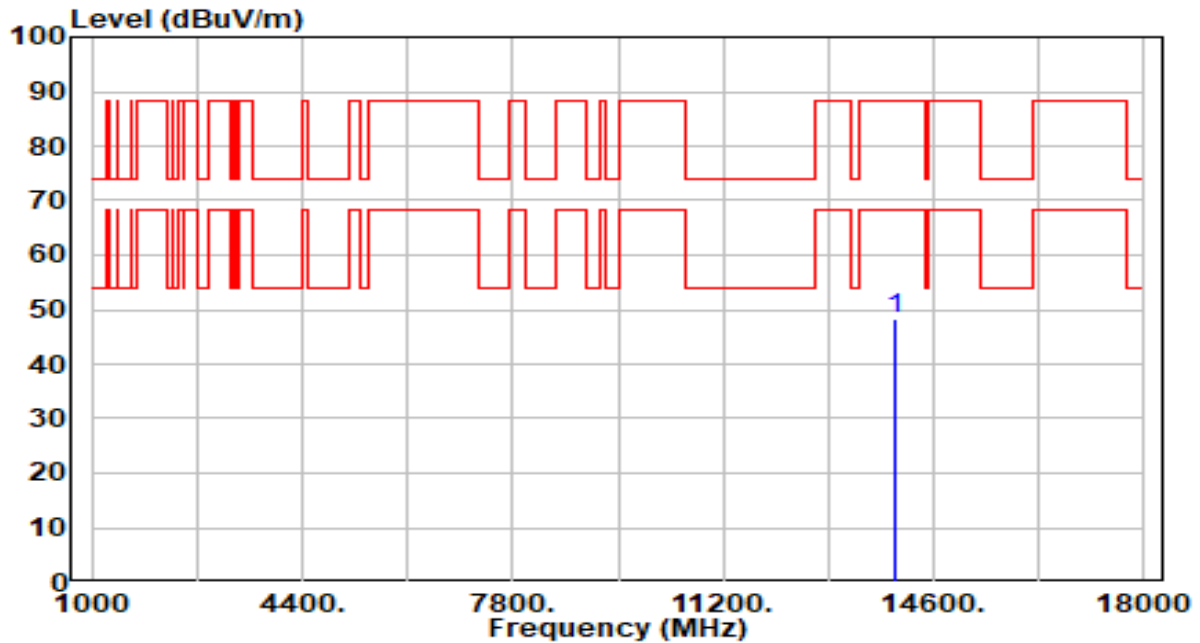


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13970.000     | 42.99          | 5.15       | 48.14                | -40.06      | 88.20          | 100         | 140         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

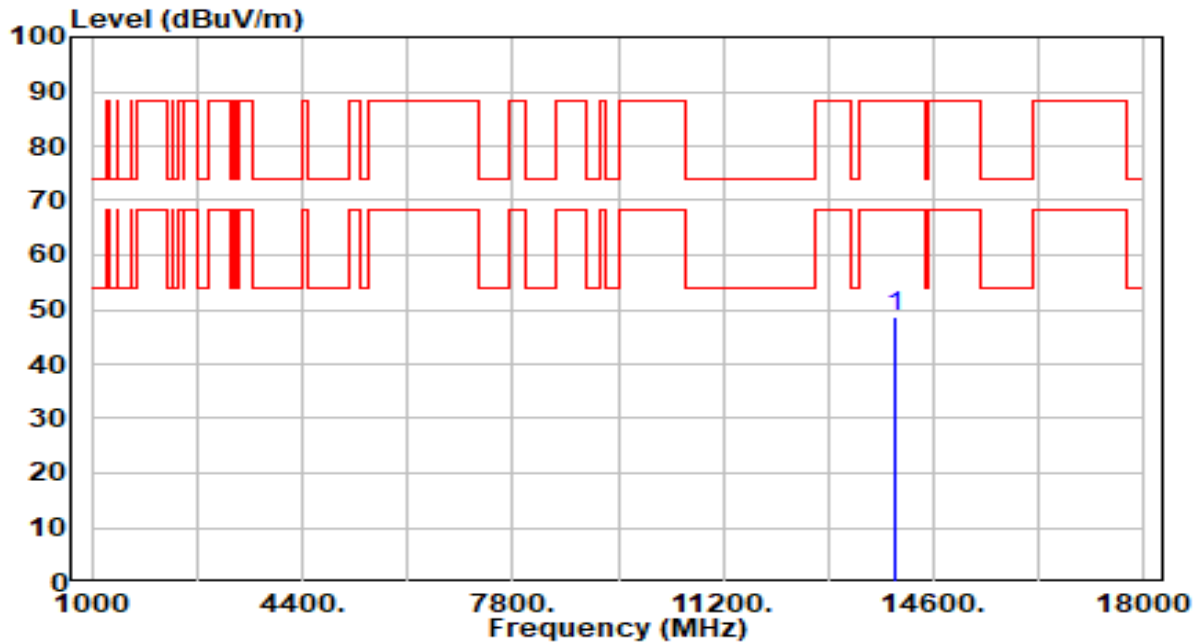


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13970.000     | 43.69          | 5.15       | 48.84                | -39.36      | 88.20          | 100         | 357         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band5_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

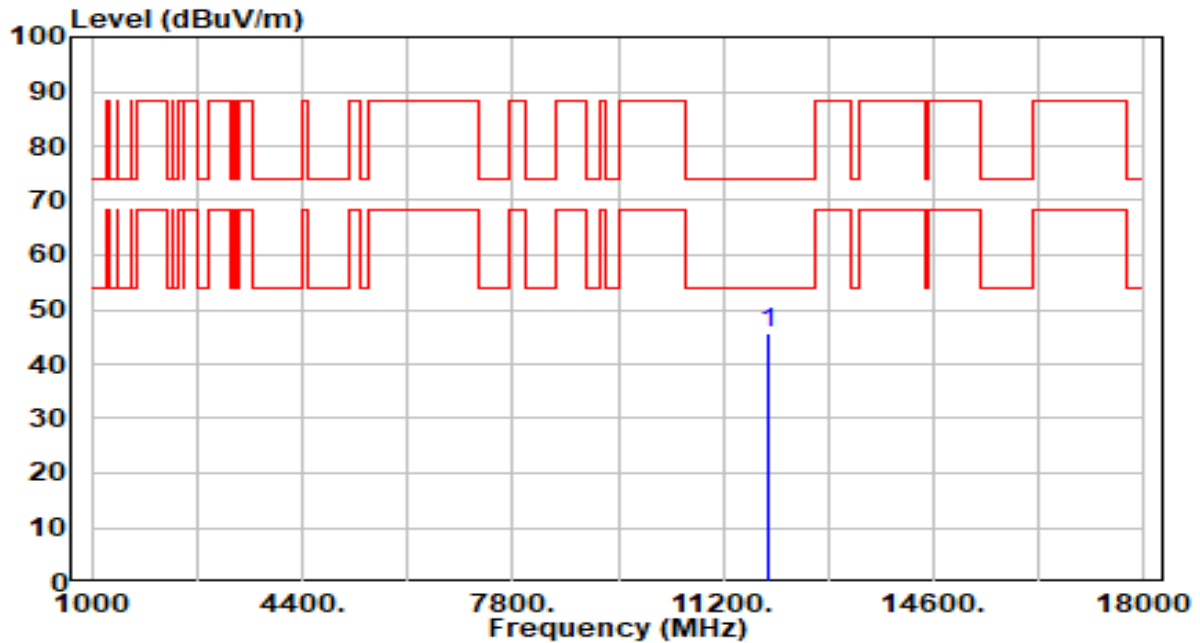


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 11910.000     | 41.87          | 3.78       | 45.65                | -28.35      | 74.00          | 100         | 90          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band5_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

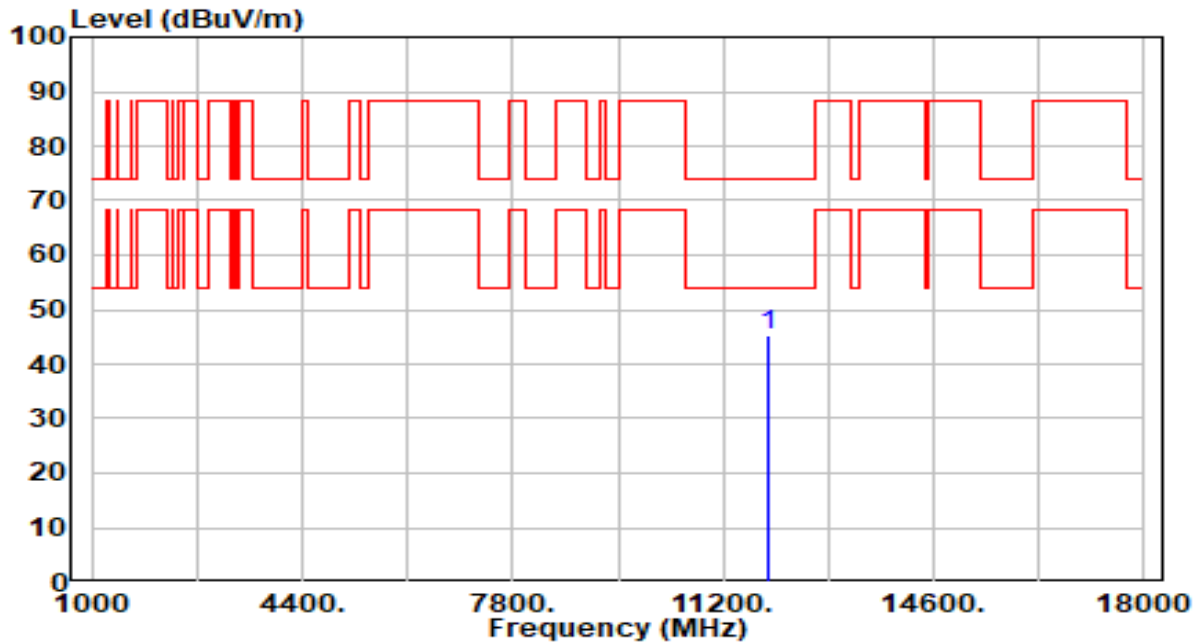


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 11910.000     | 41.57          | 3.78       | 45.35                | -28.65      | 74.00          | 100         | 343         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band5_CH 45_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

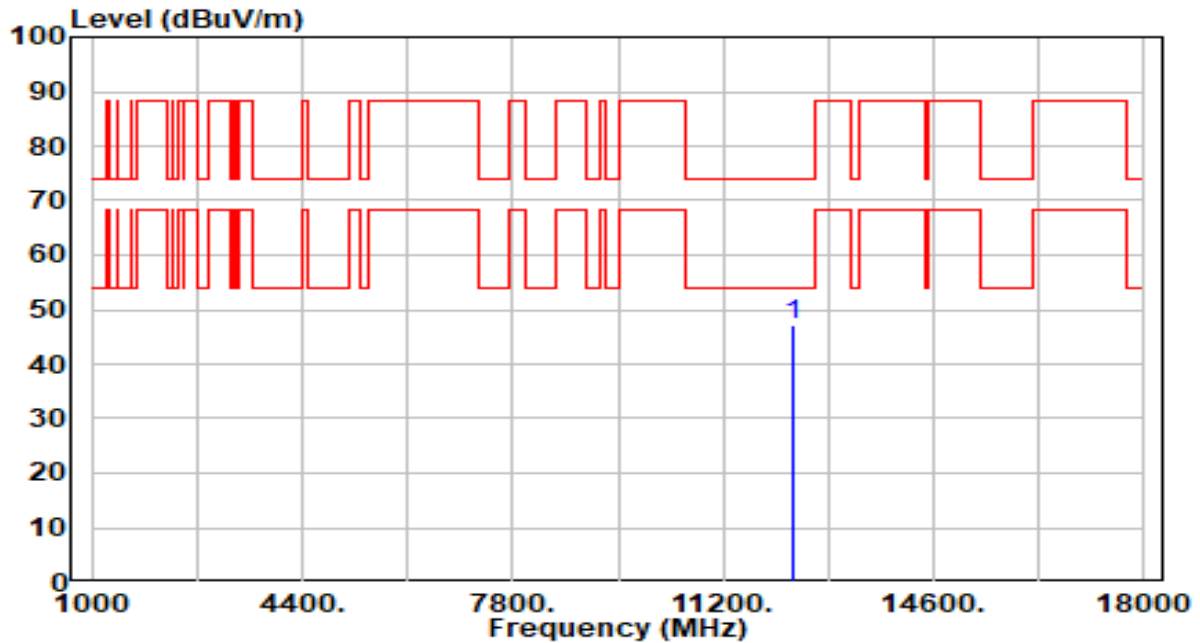


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12350.000     | 42.69          | 4.50       | 47.19                | -26.81      | 74.00          | 100         | 347         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band5_CH 45_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

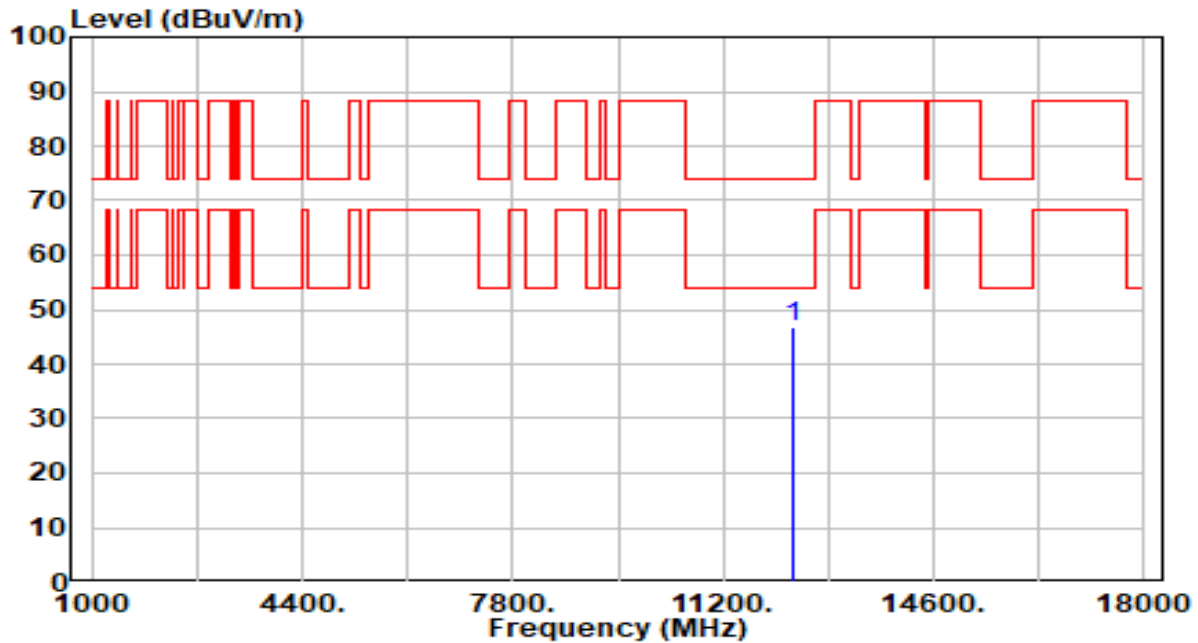


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12350.000     | 42.14          | 4.50       | 46.64                | -27.36      | 74.00          | 100         | 53          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band5_CH 93_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

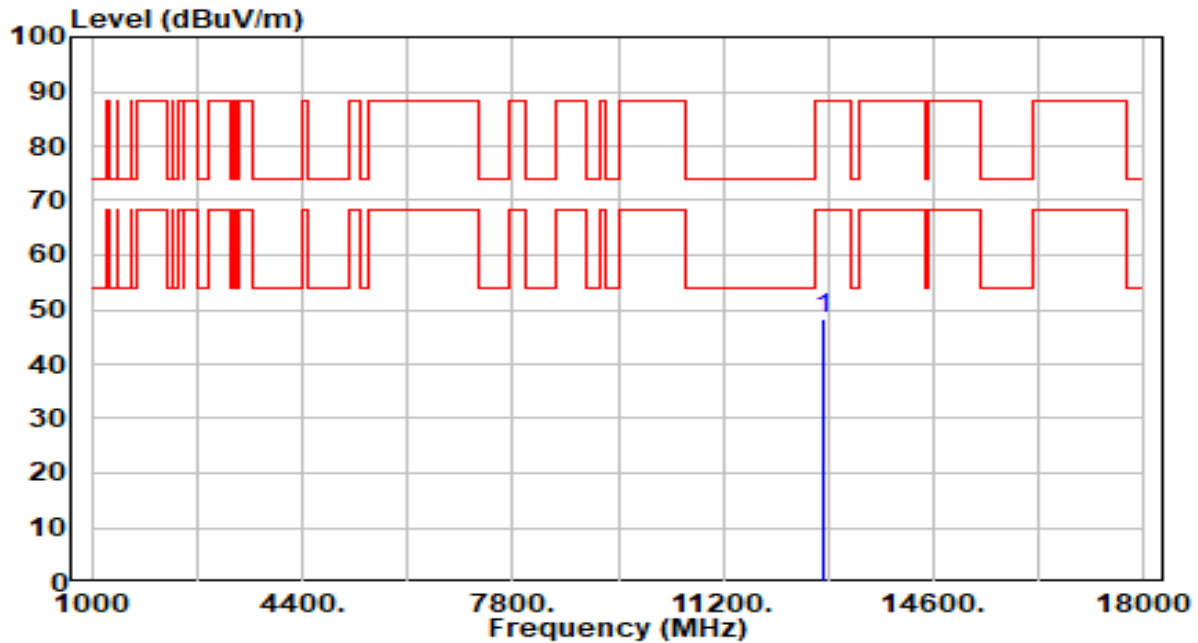


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12830.000     | 42.95          | 5.29       | 48.24                | -39.96      | 88.20          | 100         | 116         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band5_CH 93_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

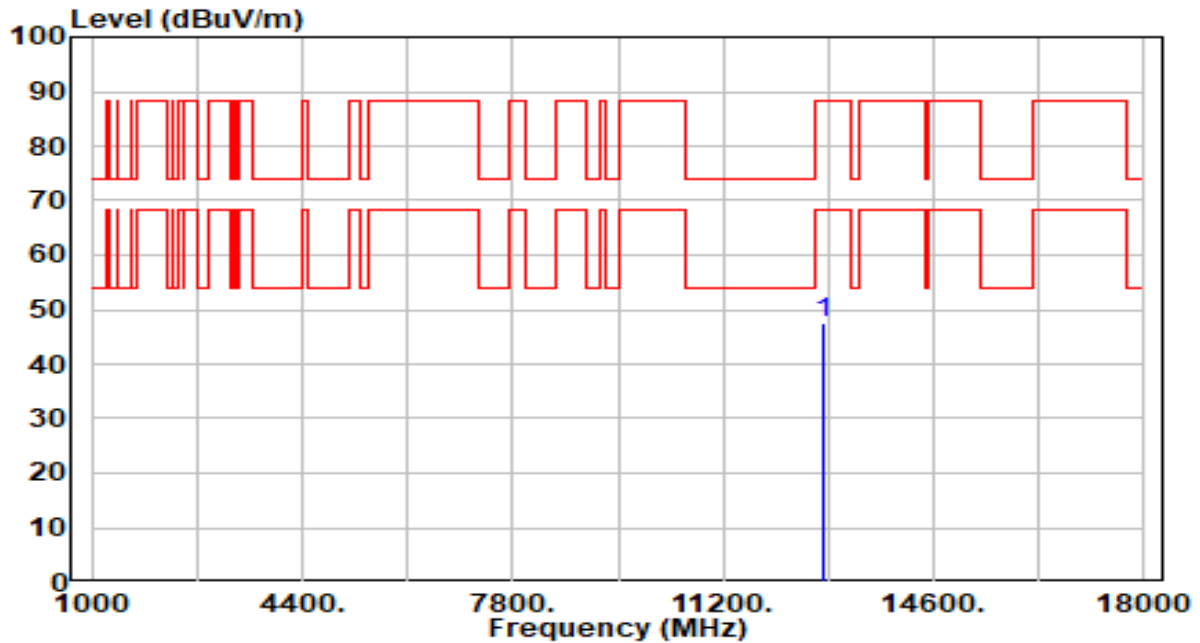


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12830.000     | 42.08          | 5.29       | 47.37                | -40.83      | 88.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band6_CH 97_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

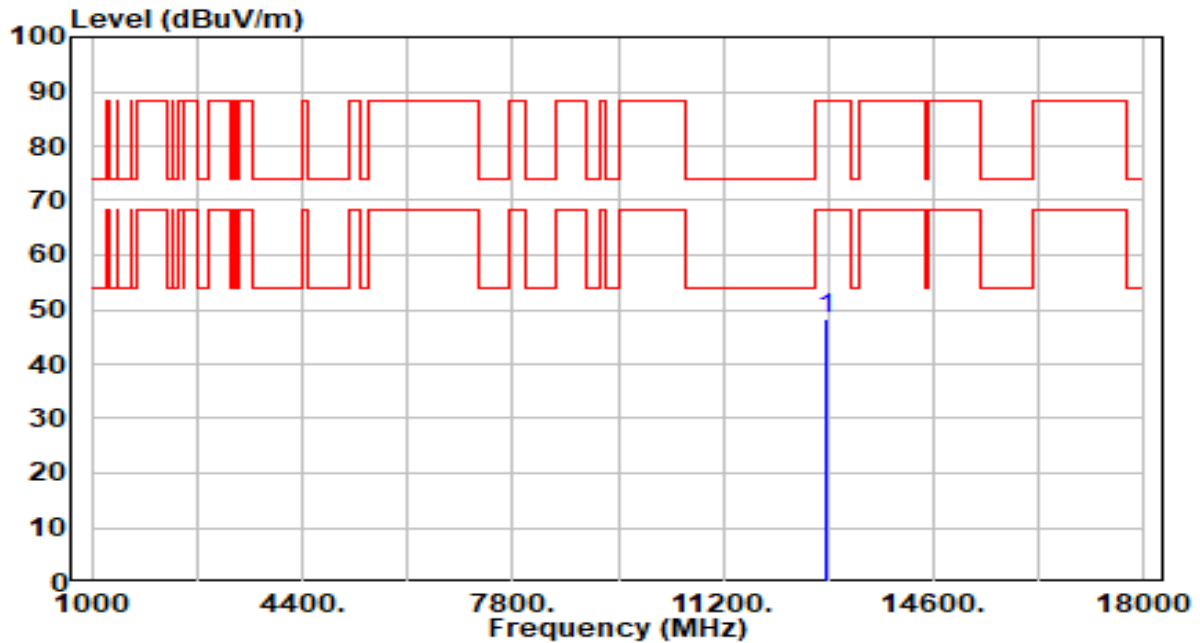


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12870.000     | 43.10          | 5.28       | 48.38                | -39.82      | 88.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band6_CH 97_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

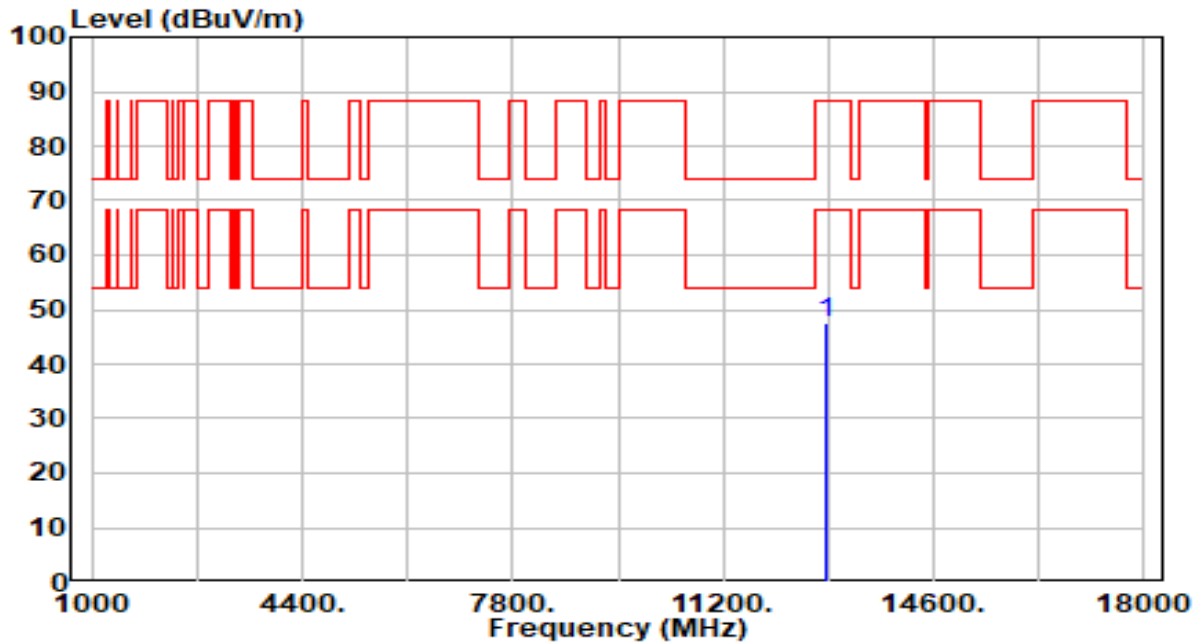


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12870.000     | 42.20          | 5.28       | 47.48                | -40.72      | 88.20          | 100         | 165         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band6_CH 105_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

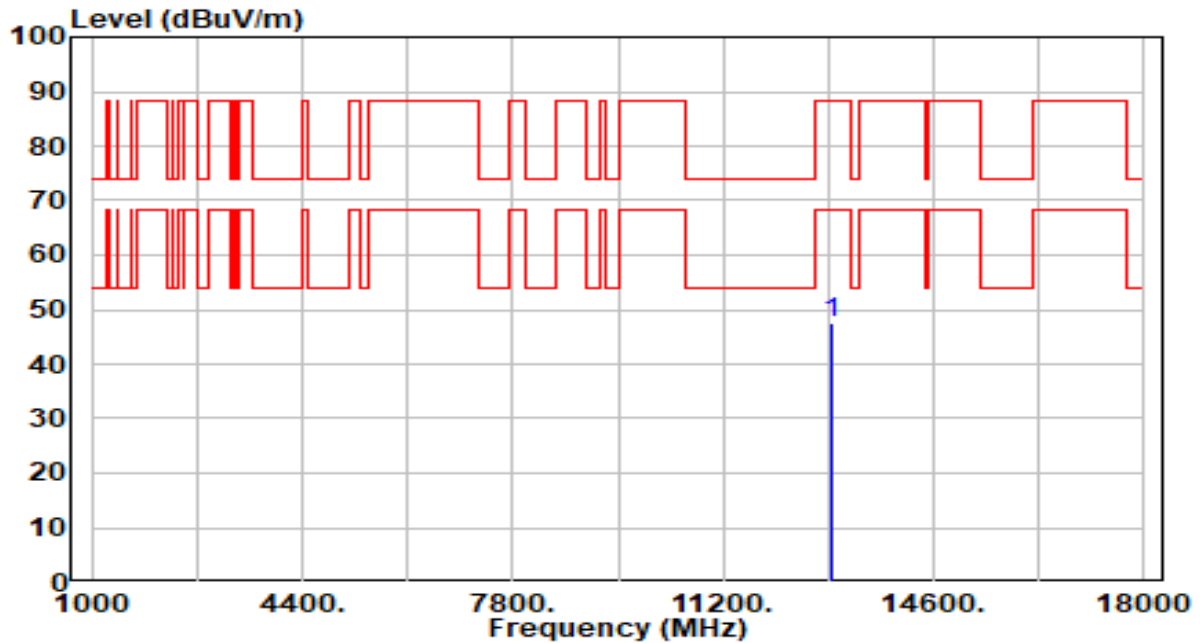


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12950.000     | 42.19          | 5.26       | 47.45                | -40.75      | 88.20          | 100         | 31          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band6_CH 105_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

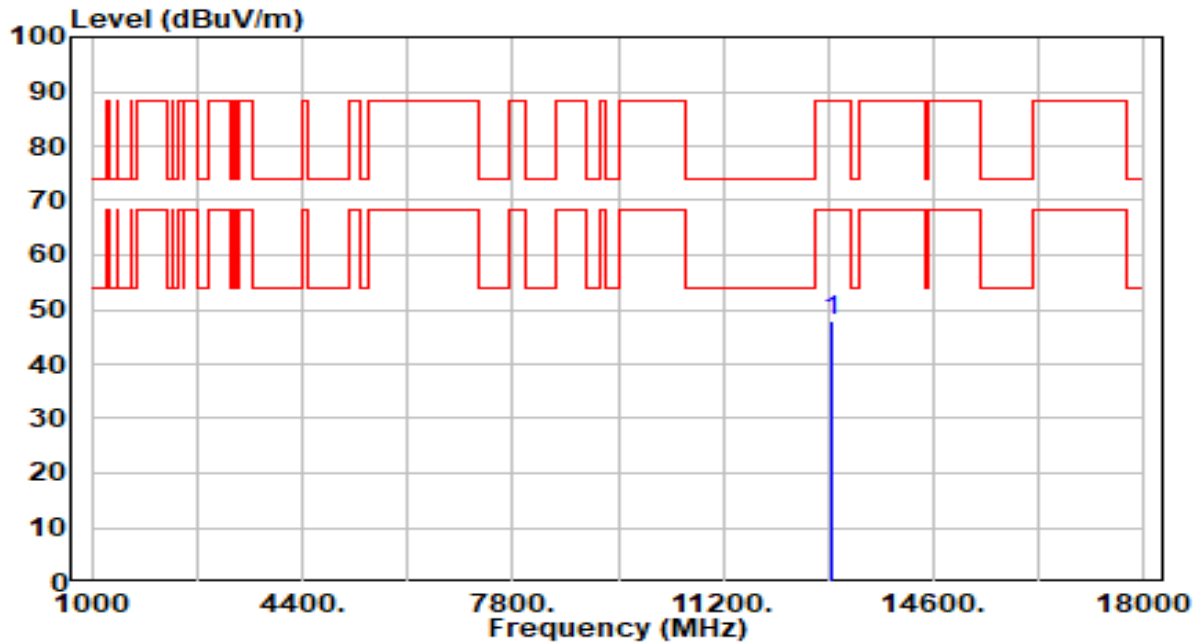


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12950.000     | 42.64          | 5.26       | 47.90                | -40.30      | 88.20          | 100         | 144         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band6_CH 113_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

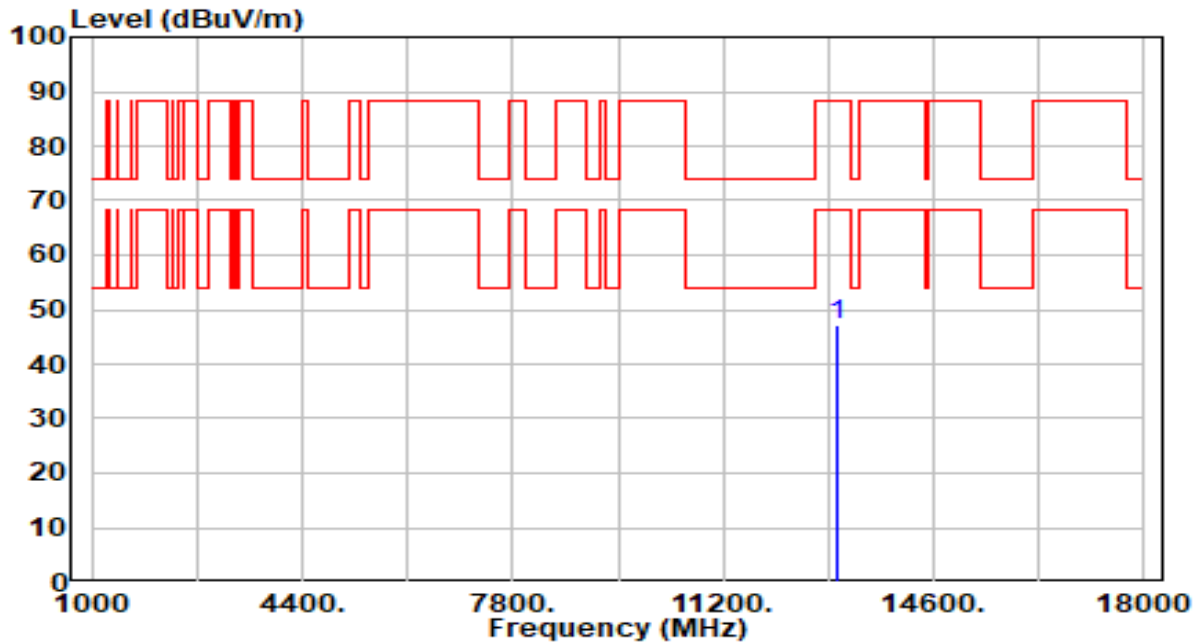


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13030.000     | 41.84          | 5.23       | 47.08                | -41.12      | 88.20          | 100         | 14          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band6_CH 113_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

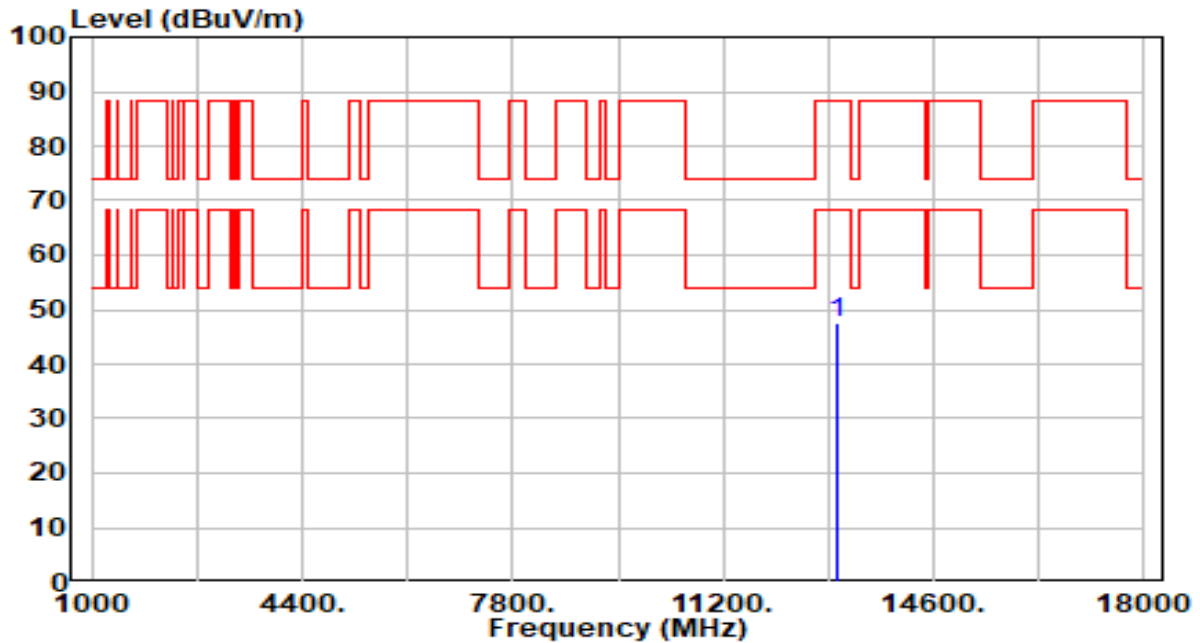


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13030.000     | 42.19          | 5.23       | 47.42                | -40.78      | 88.20          | 100         | 306         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band7_CH 117_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

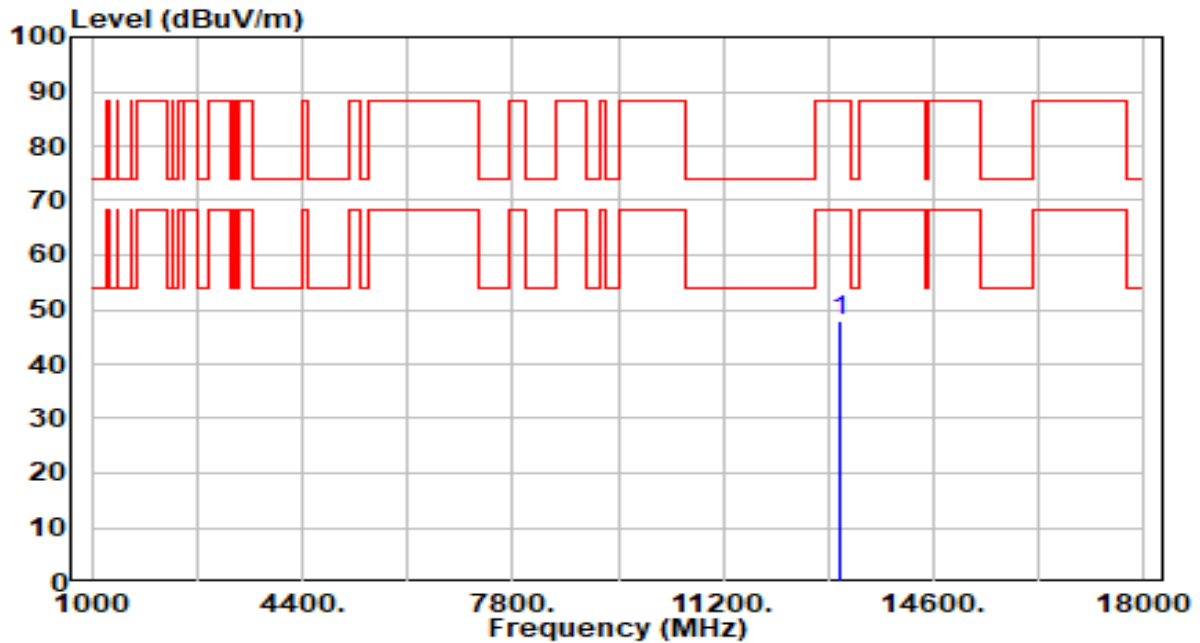


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13070.000     | 42.58          | 5.23       | 47.81                | -40.39      | 88.20          | 100         | 131         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band7_CH 117_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

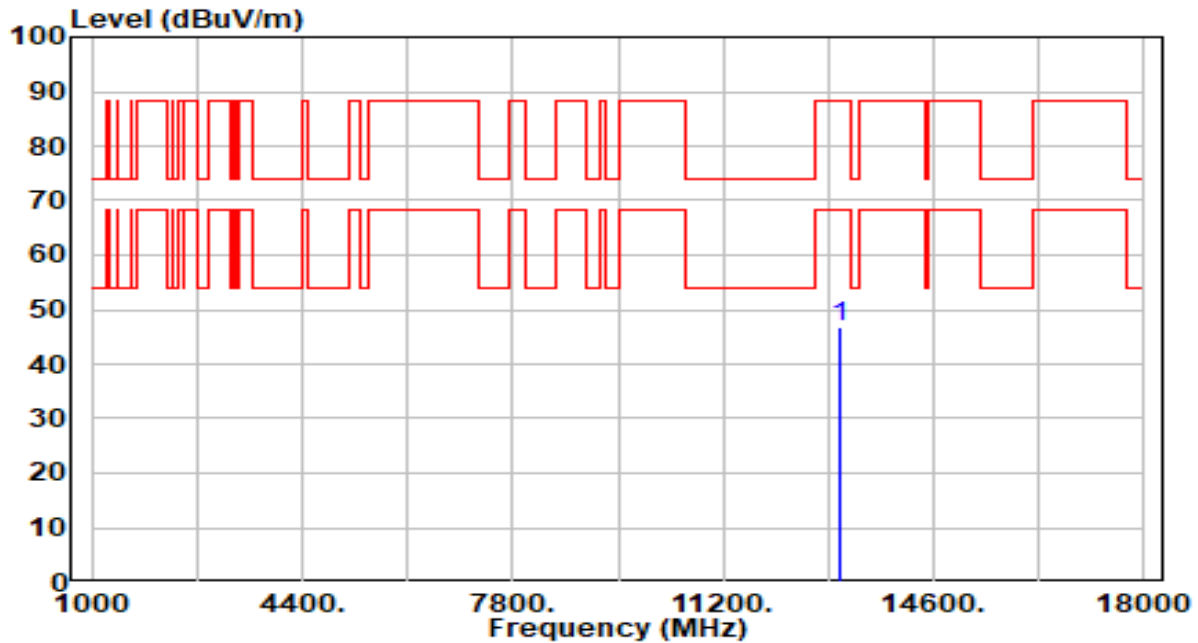


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13070.000     | 41.50          | 5.23       | 46.73                | -41.47      | 88.20          | 100         | 343         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band7_CH 149_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

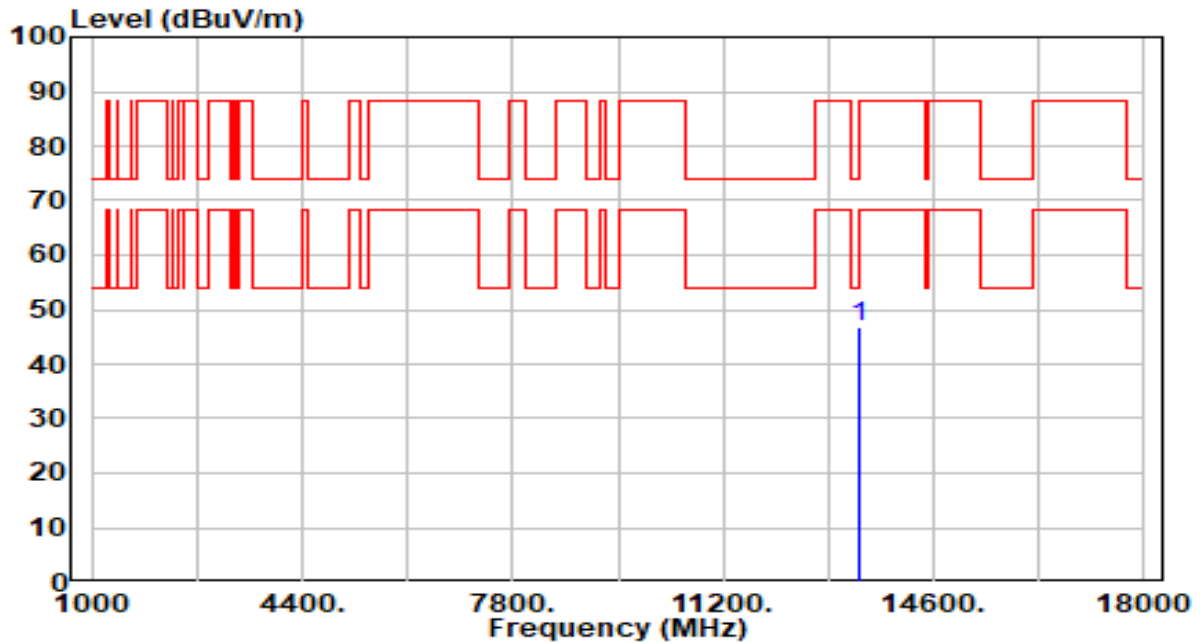


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13390.000     | 41.68          | 5.26       | 46.94                | -27.06      | 74.00          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band7_CH 149_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

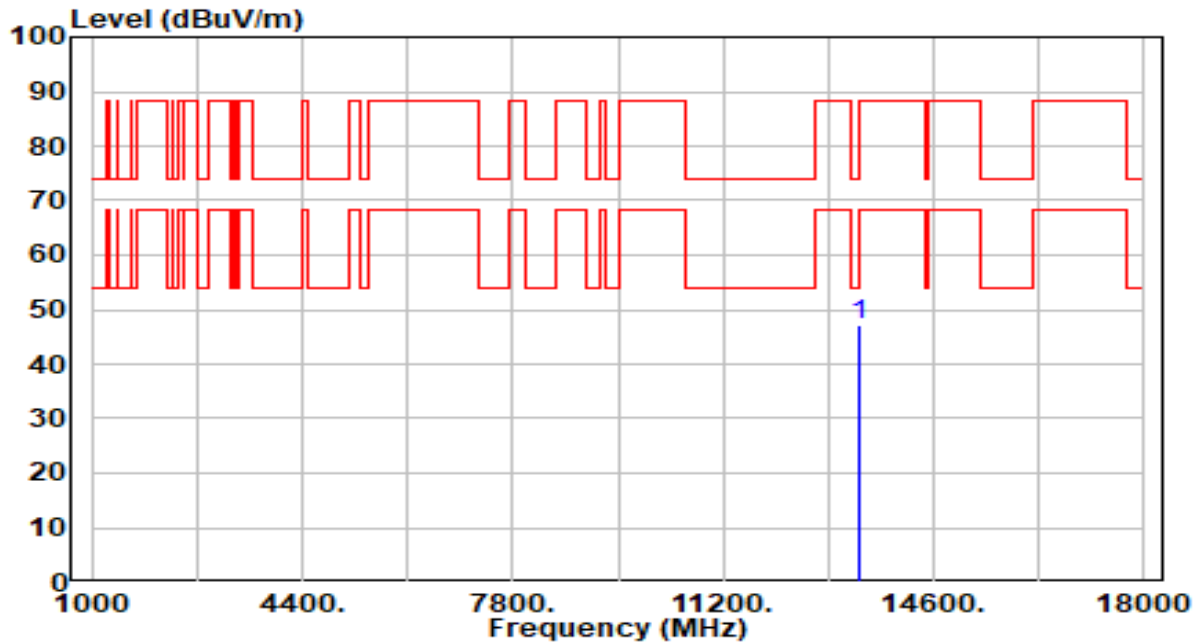


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13390.000     | 41.73          | 5.26       | 46.98                | -27.02      | 74.00          | 100         | 321         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band7_CH 181_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

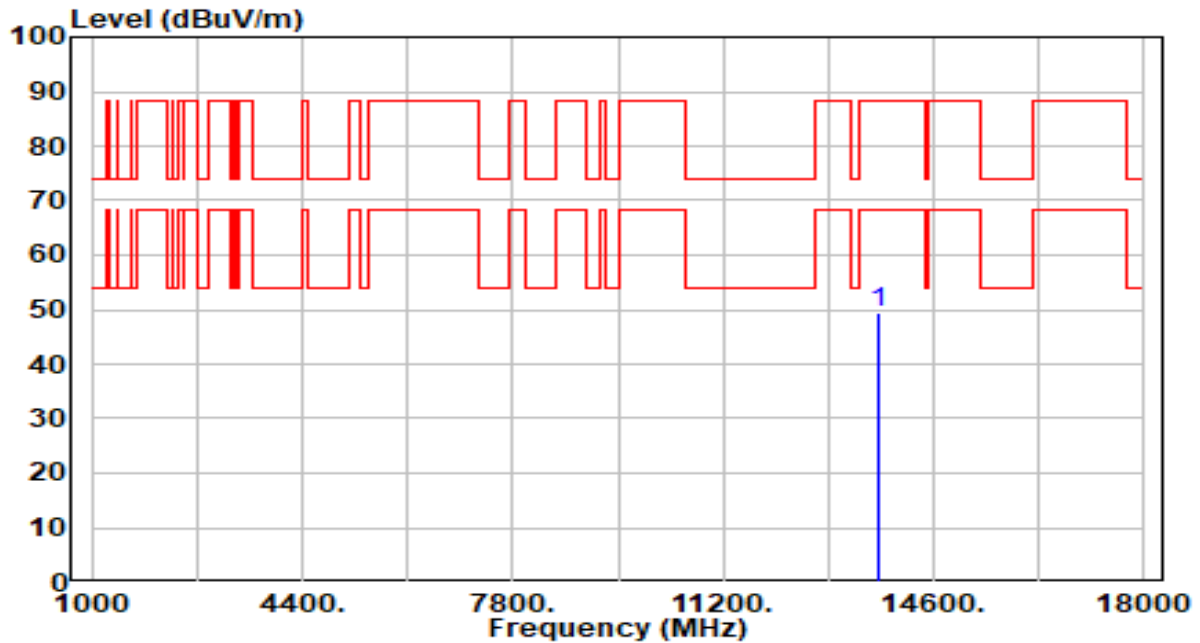


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13710.000     | 44.38          | 5.02       | 49.40                | -38.80      | 88.20          | 100         | 309         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band7_CH 181_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

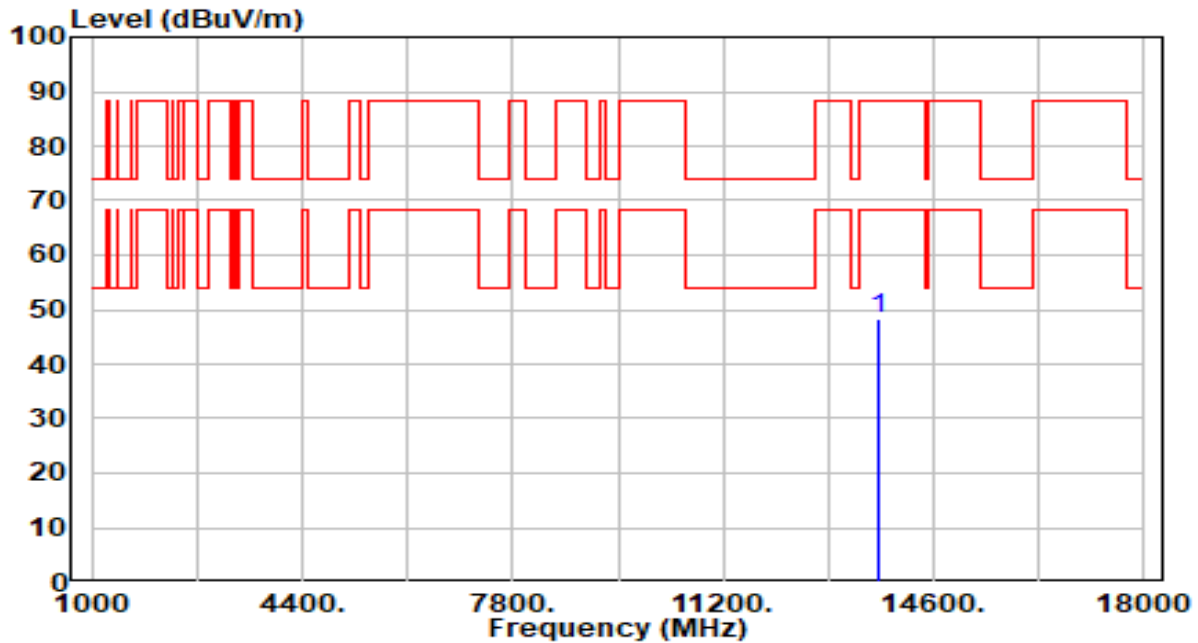


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13710.000     | 43.23          | 5.02       | 48.25                | -39.95      | 88.20          | 100         | 276         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band7_CH 185_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

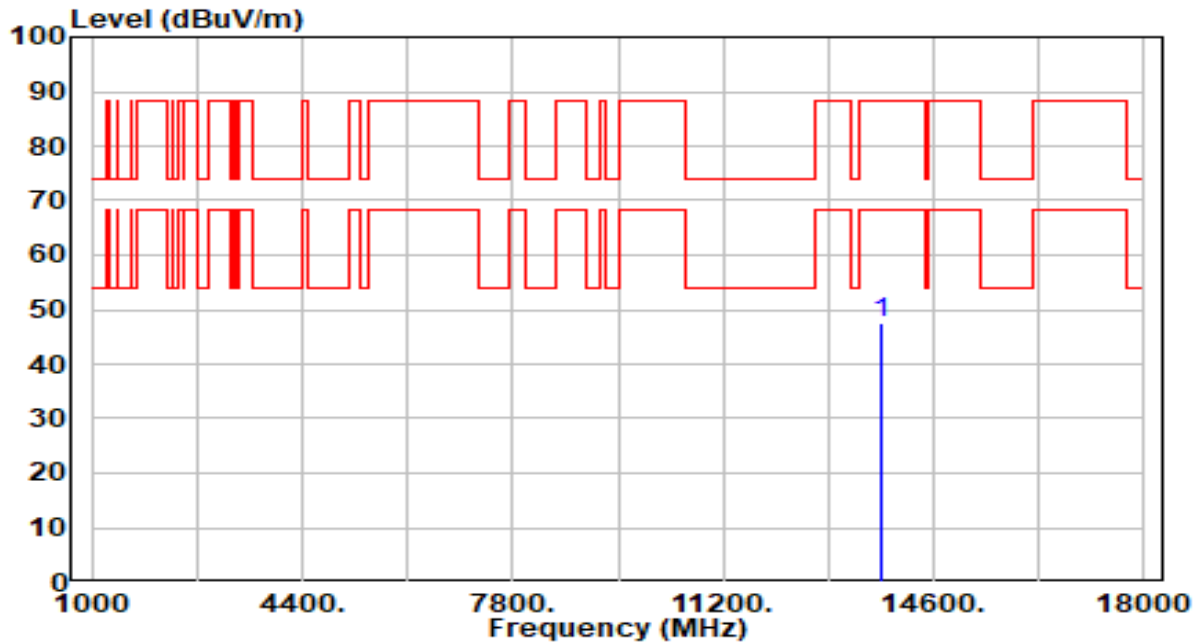


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13750.000     | 42.57          | 5.03       | 47.60                | -40.60      | 88.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band7_CH 185_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

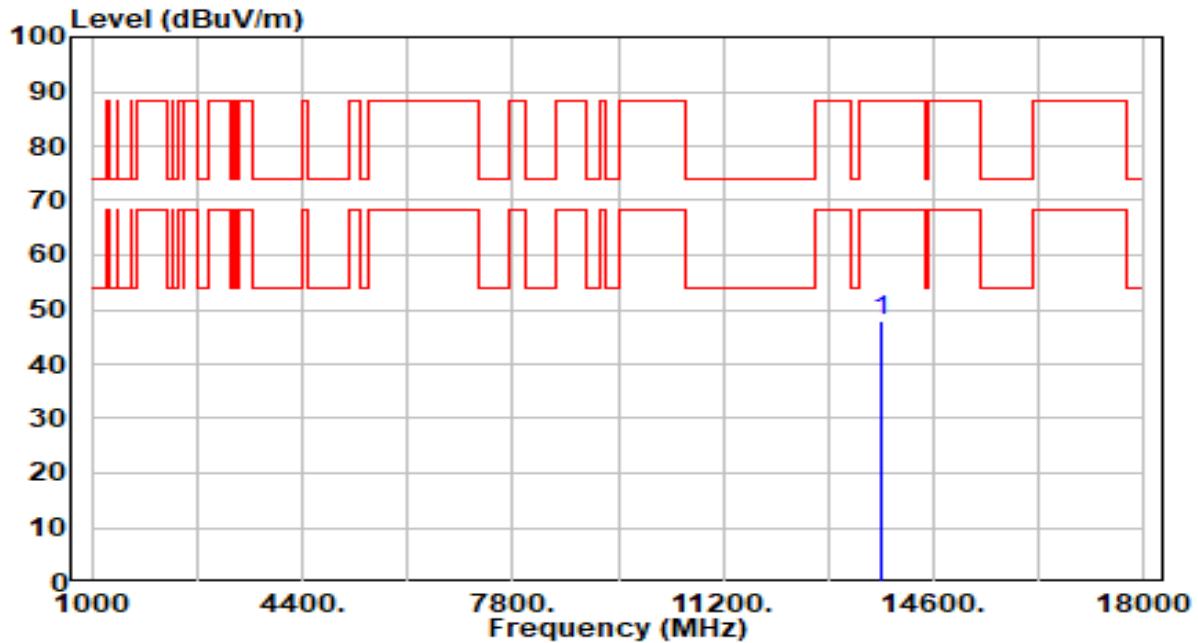


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13750.000     | 42.97          | 5.03       | 48.00                | -40.20      | 88.20          | 100         | 89          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band8_CH 189_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

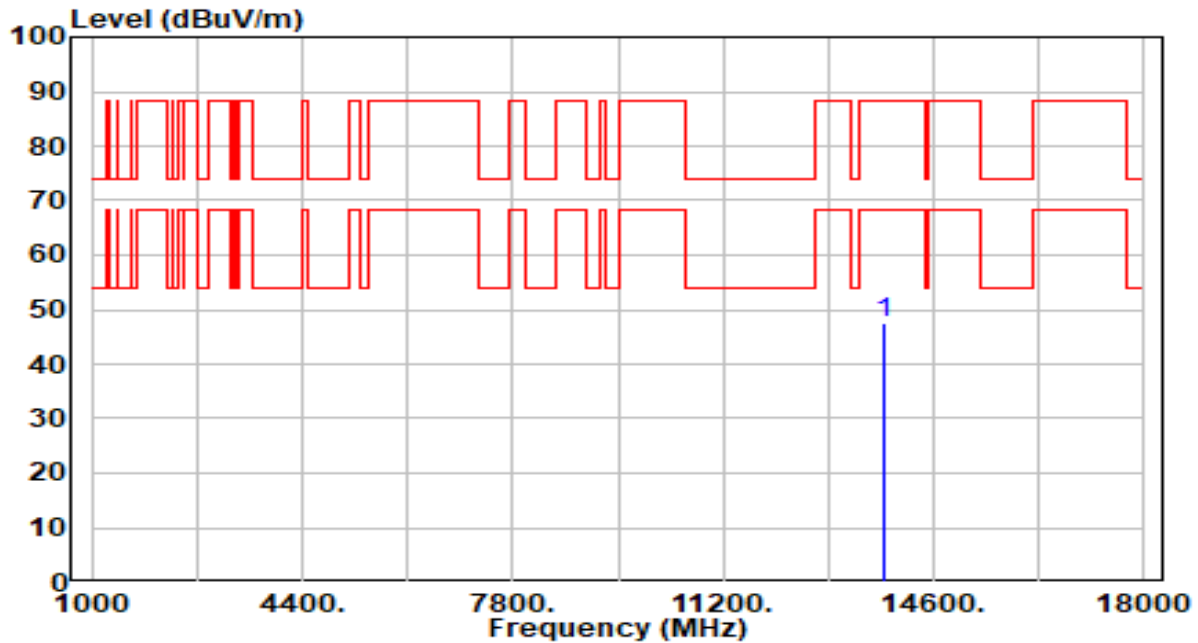


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13790.000     | 42.70          | 5.04       | 47.74                | -40.46      | 88.20          | 100         | 136         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band8_CH 189_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

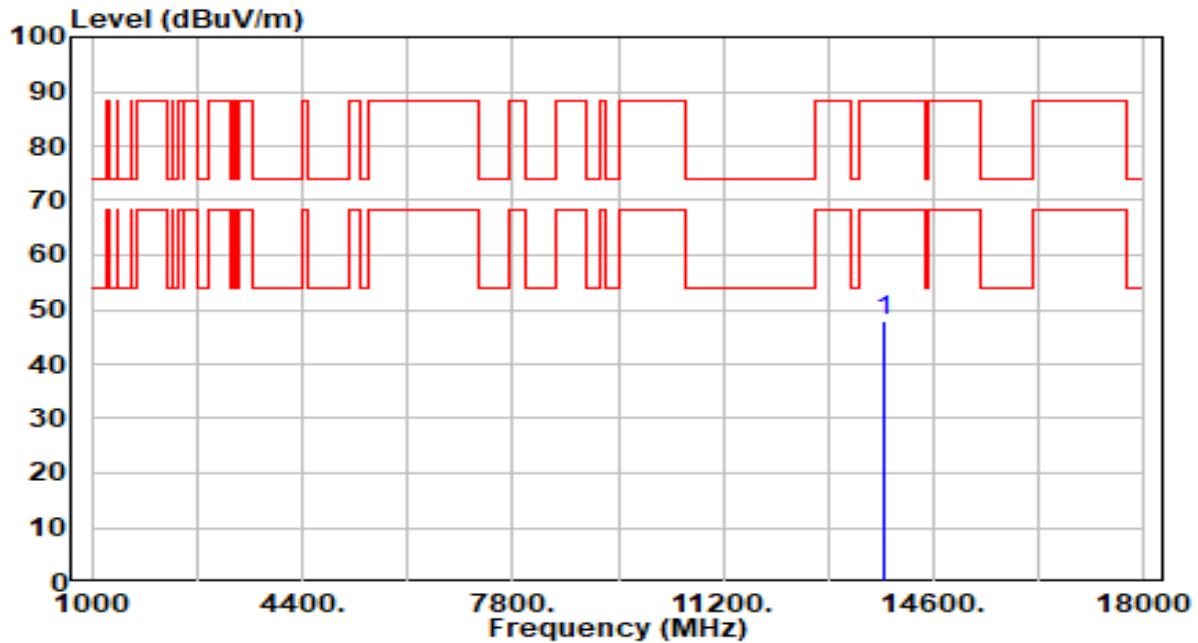


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13790.000     | 42.92          | 5.04       | 47.95                | -40.25      | 88.20          | 100         | 294         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band8_CH 213_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

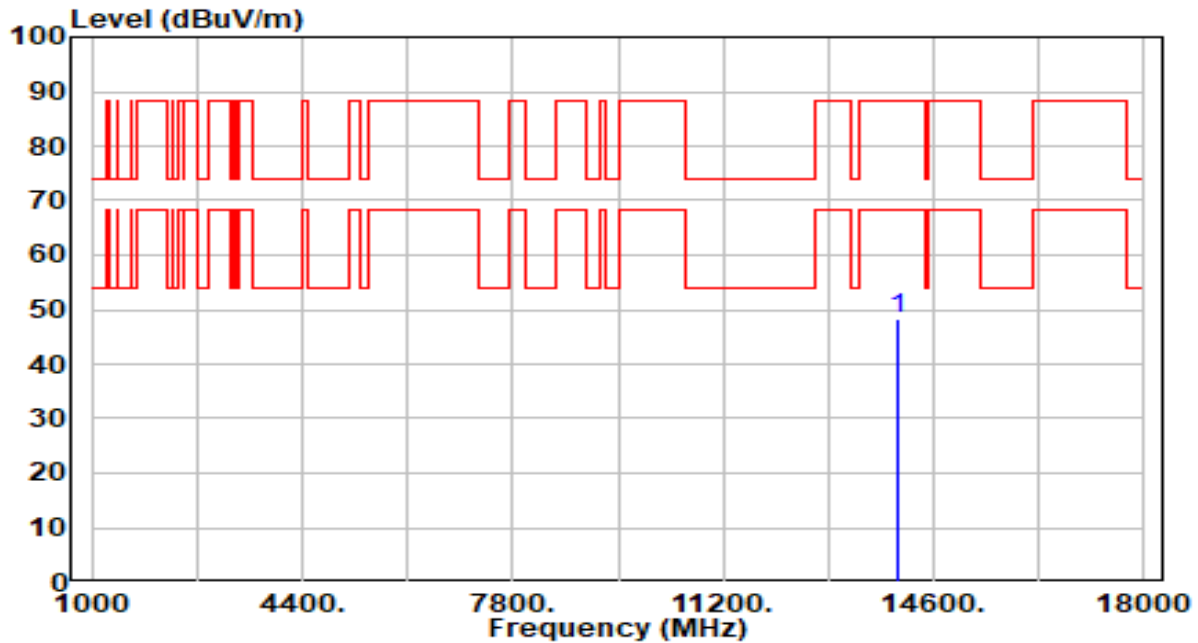


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14030.000     | 43.26          | 5.16       | 48.41                | -39.79      | 88.20          | 100         | 148         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band8_CH 213_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

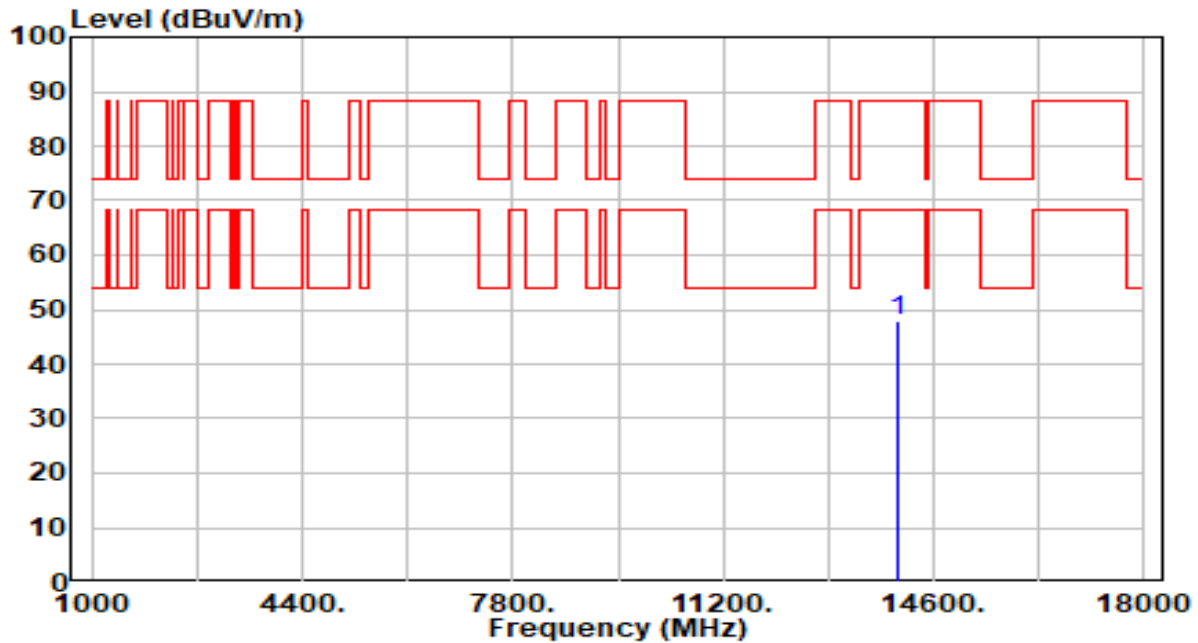


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14030.000     | 42.82          | 5.16       | 47.97                | -40.23      | 88.20          | 100         | 190         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

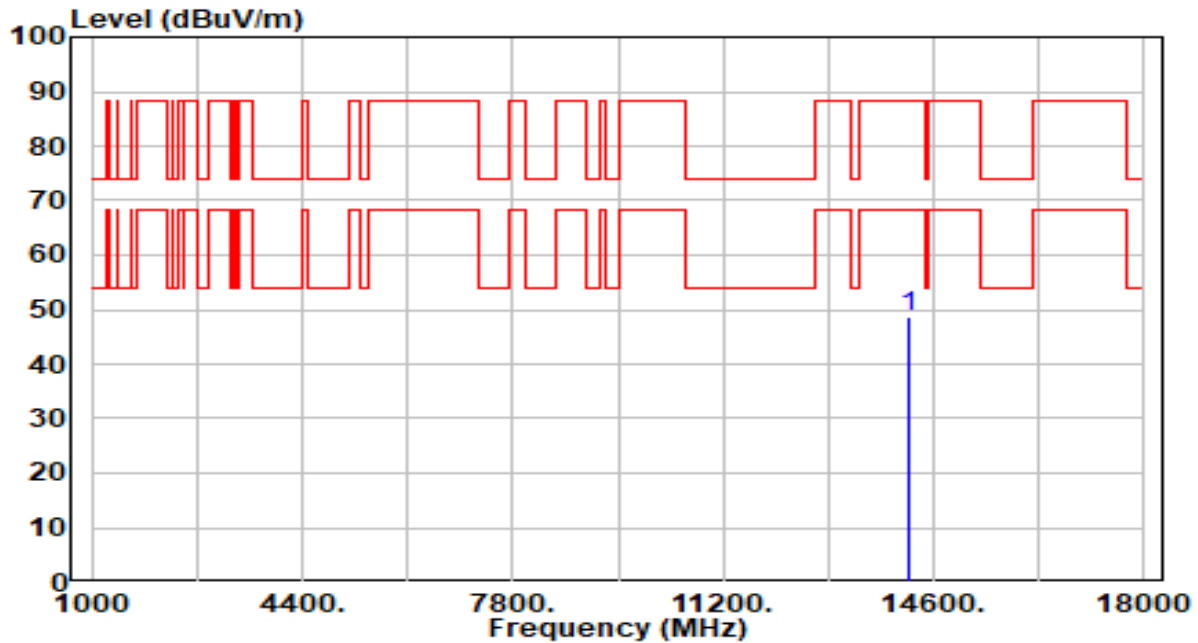


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14190.000     | 43.67          | 5.09       | 48.75                | -39.45      | 88.20          | 100         | 150         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

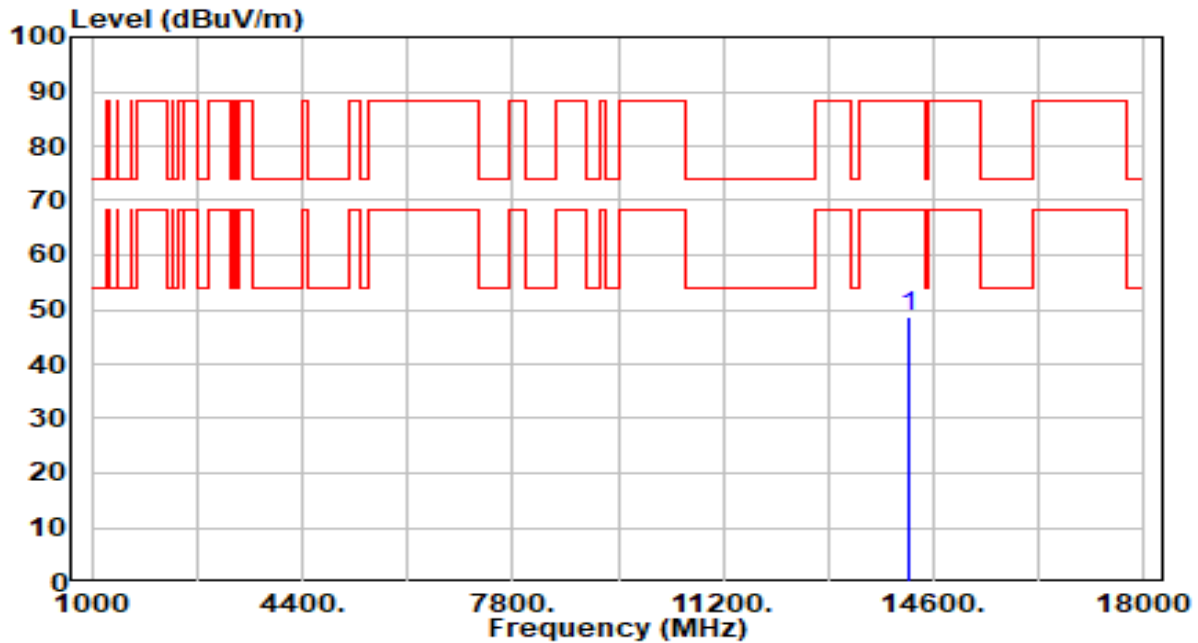


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 14190.000          | 43.56             | 5.09          | 48.65                   | -39.55         | 88.20             | 100            | 158            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band5_CH 3_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

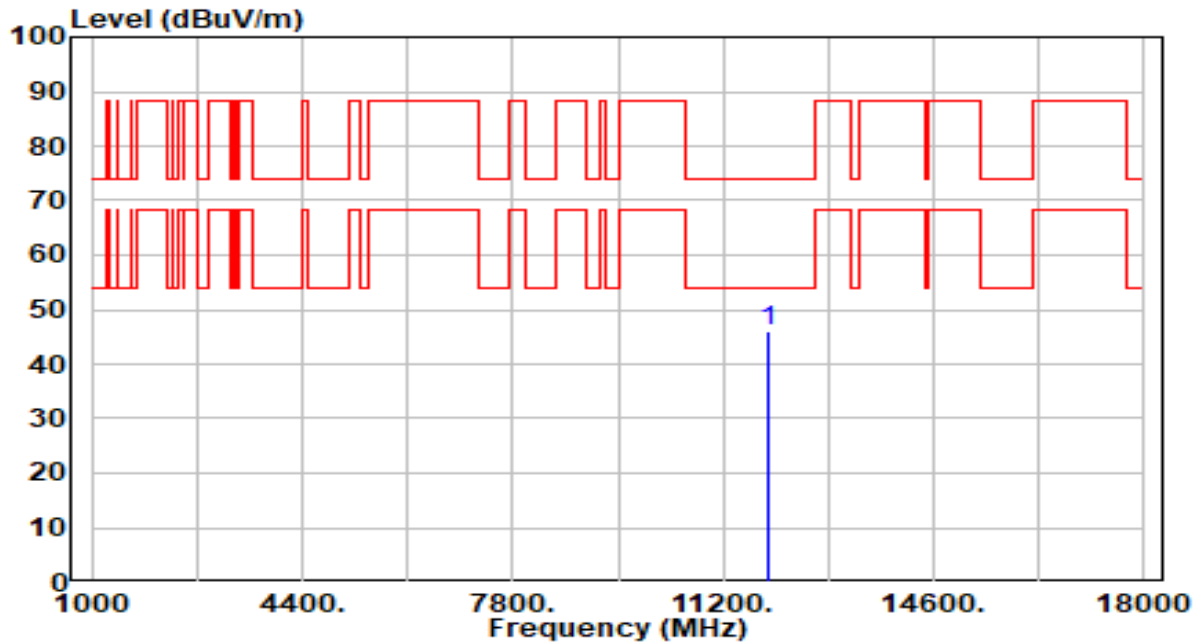


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 11930.000     | 42.19          | 3.81       | 46.00                | -28.00      | 74.00          | 100         | 324         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band5_CH 3_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

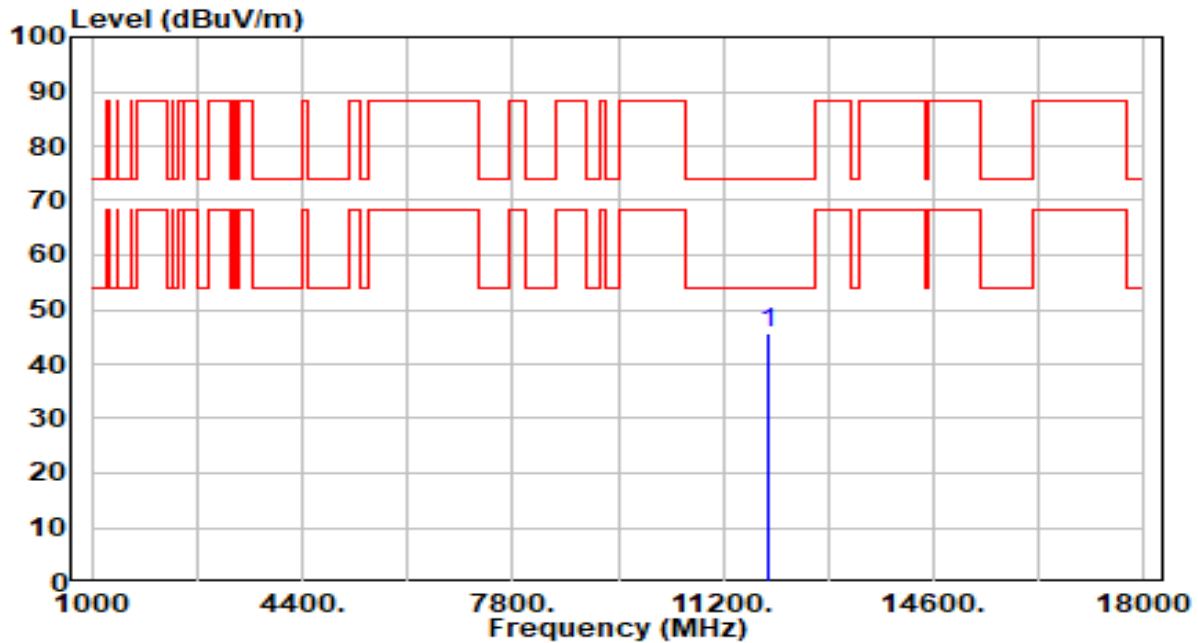


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 11930.000     | 41.98          | 3.81       | 45.79                | -28.21      | 74.00          | 100         | 324         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band5_CH 43_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

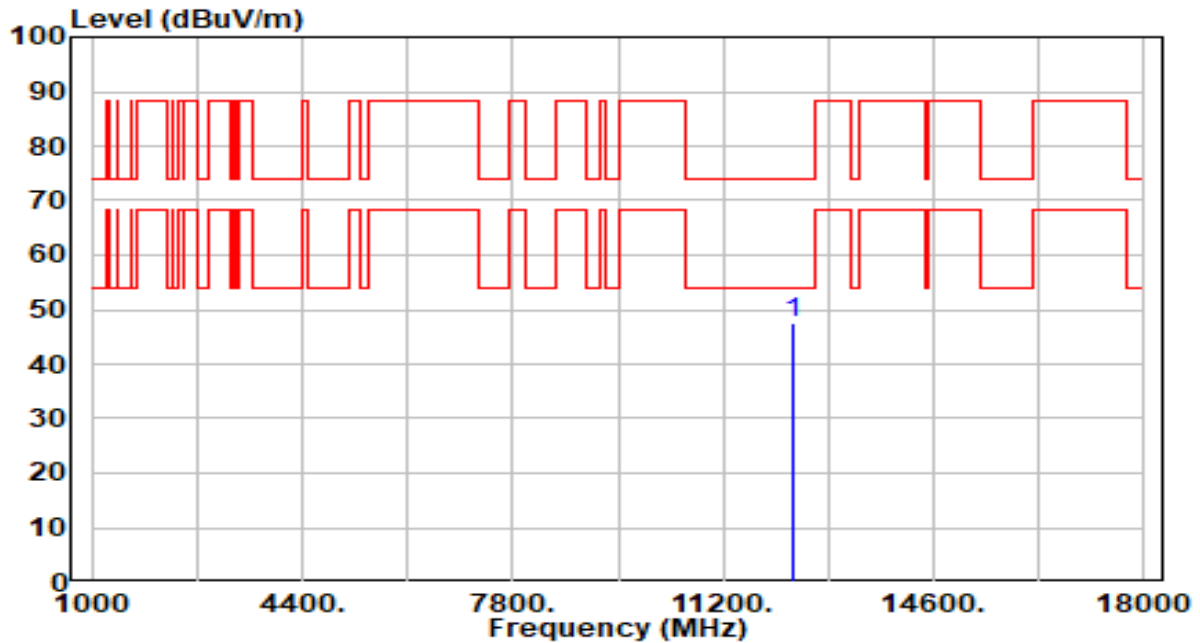


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12330.000     | 42.99          | 4.47       | 47.46                | -26.54      | 74.00          | 100         | 36          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band5_CH 43_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

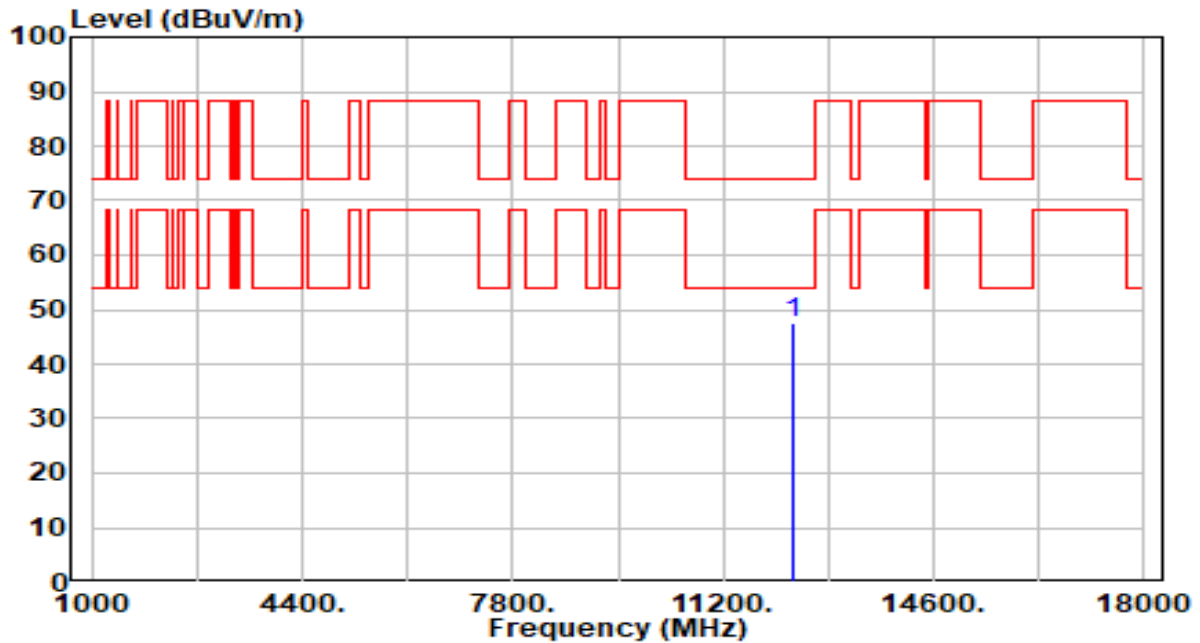


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12330.000     | 42.91          | 4.47       | 47.37                | -26.63      | 74.00          | 100         | 136         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band5_CH 91_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

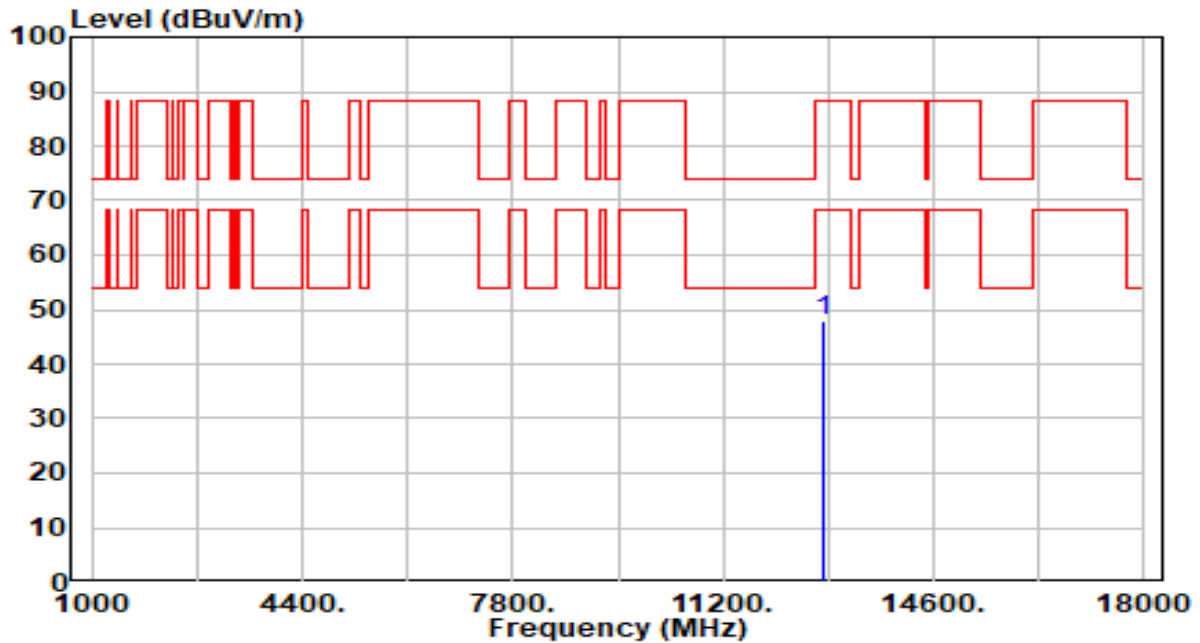


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12810.000     | 42.45          | 5.30       | 47.75                | -40.45      | 88.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band5_CH 91_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

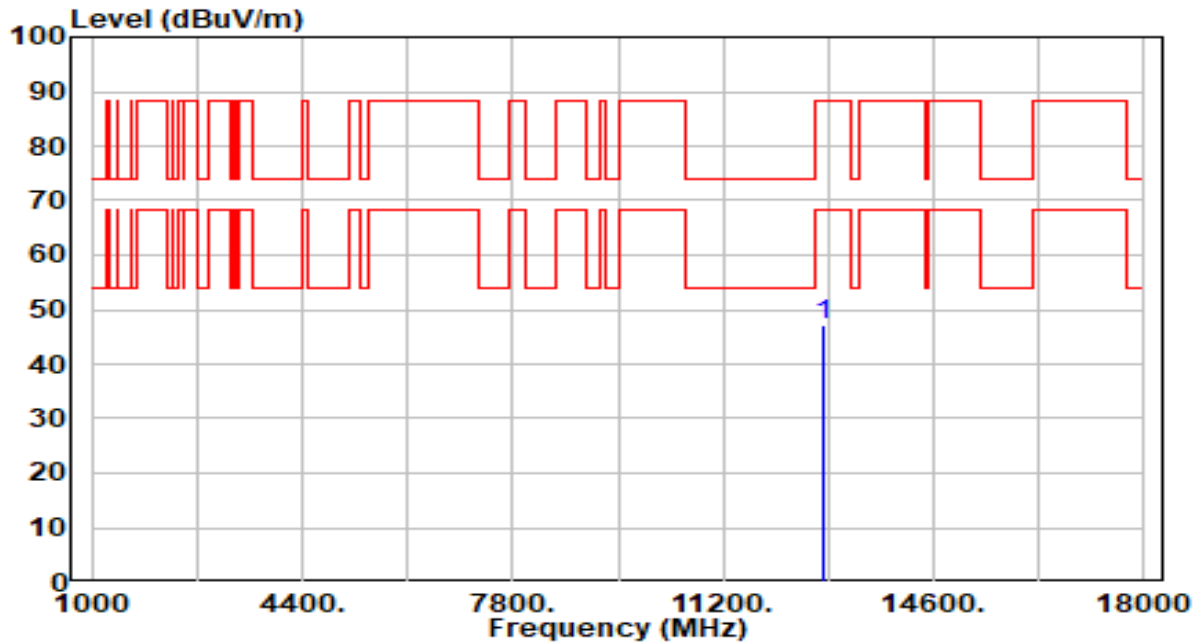


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12810.000     | 41.96          | 5.30       | 47.26                | -40.94      | 88.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band6_CH 99_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

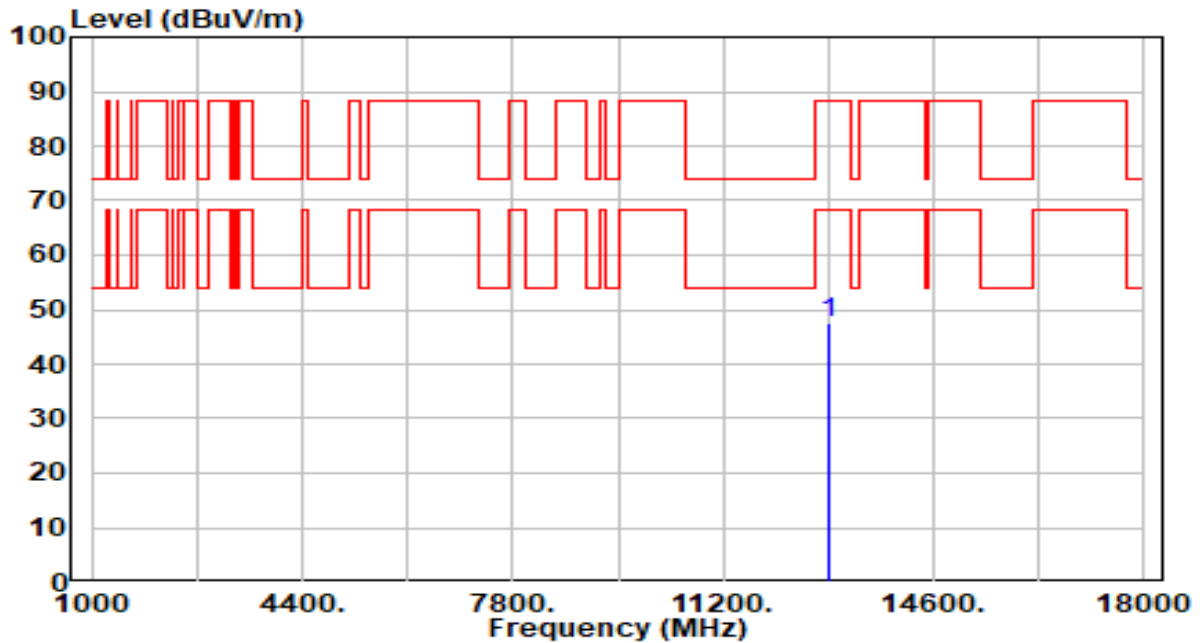


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12890.000     | 42.32          | 5.28       | 47.60                | -40.60      | 88.20          | 100         | 259         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band6_CH 99_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

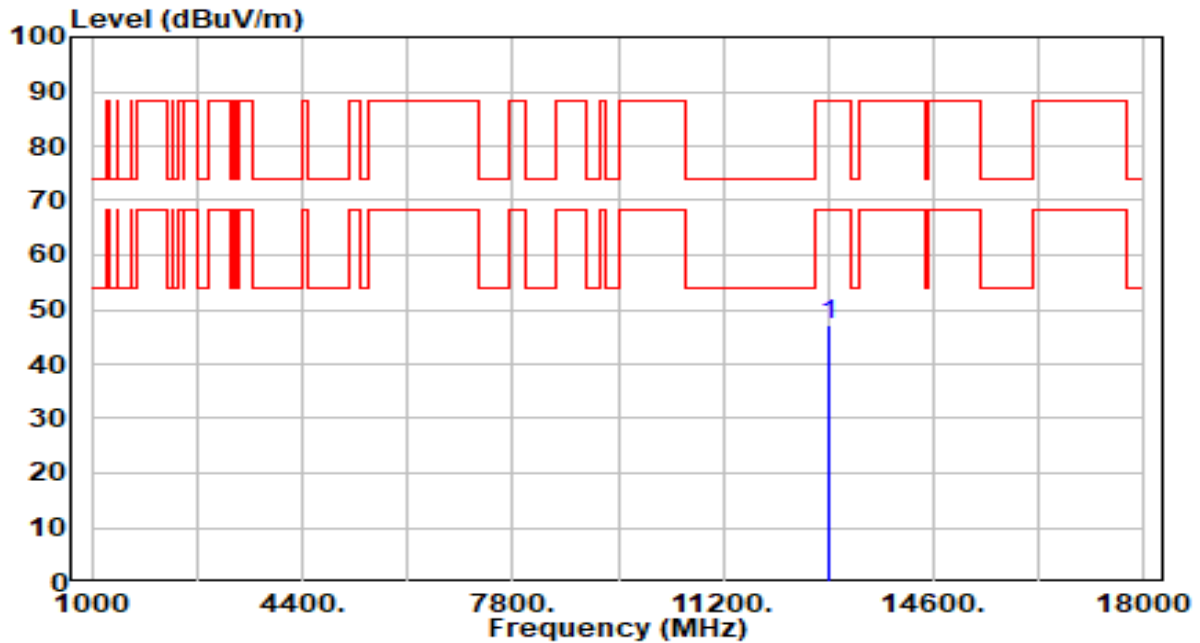


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12890.000     | 42.05          | 5.28       | 47.32                | -40.88      | 88.20          | 100         | 171         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band6_CH 107_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

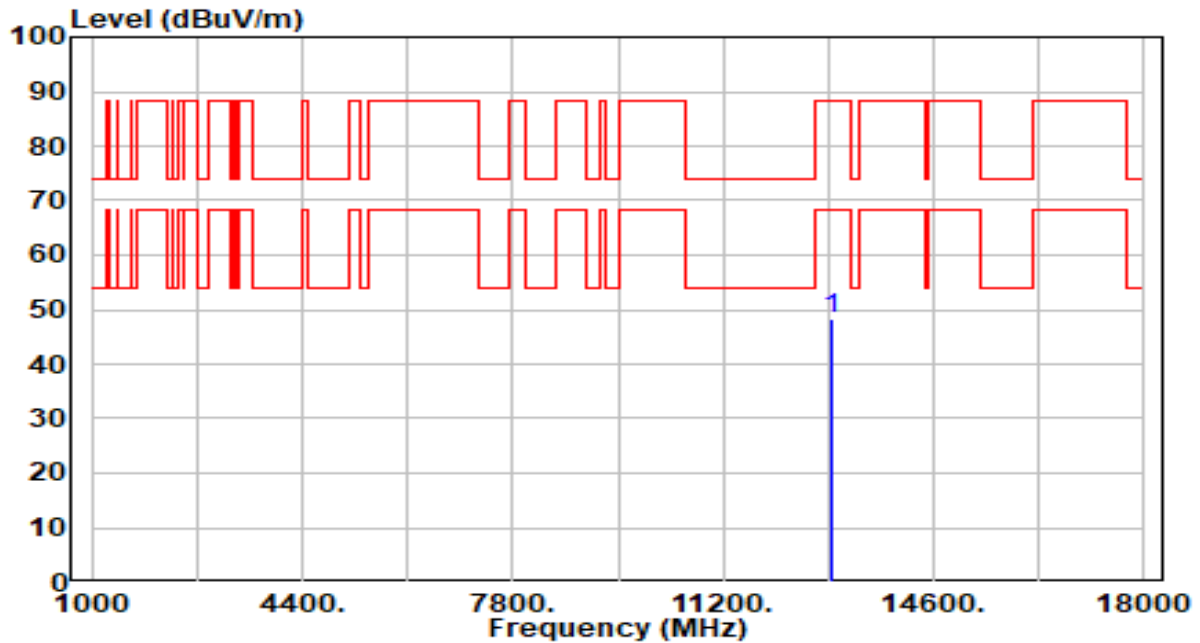


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12970.000     | 42.94          | 5.25       | 48.19                | -40.01      | 88.20          | 100         | 157         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band6_CH 107_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

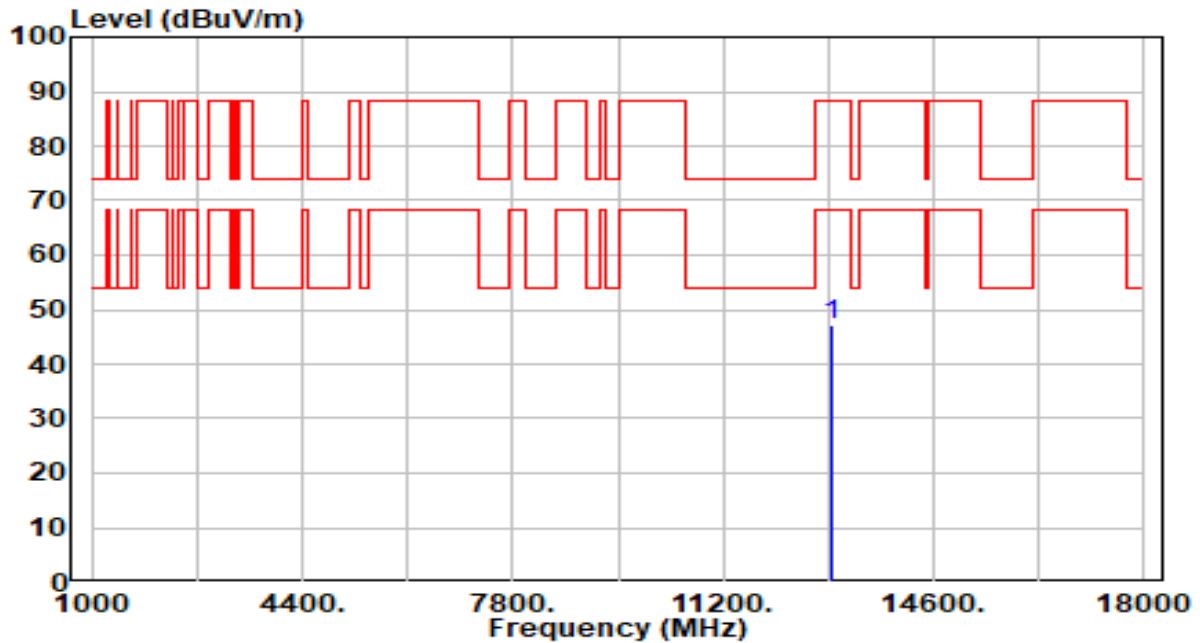


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 12970.000          | 41.95             | 5.25          | 47.20                   | -41.00         | 88.20             | 100            | 66             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band6_CH 115_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

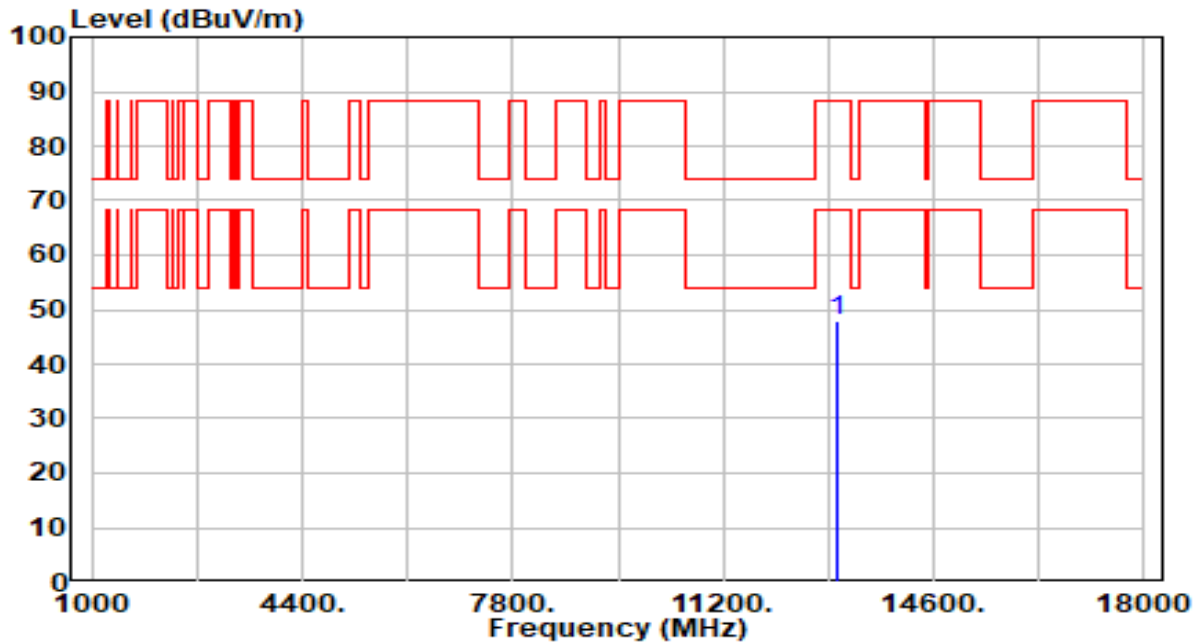


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13050.000     | 42.51          | 5.23       | 47.74                | -40.46      | 88.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band6_CH 115_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

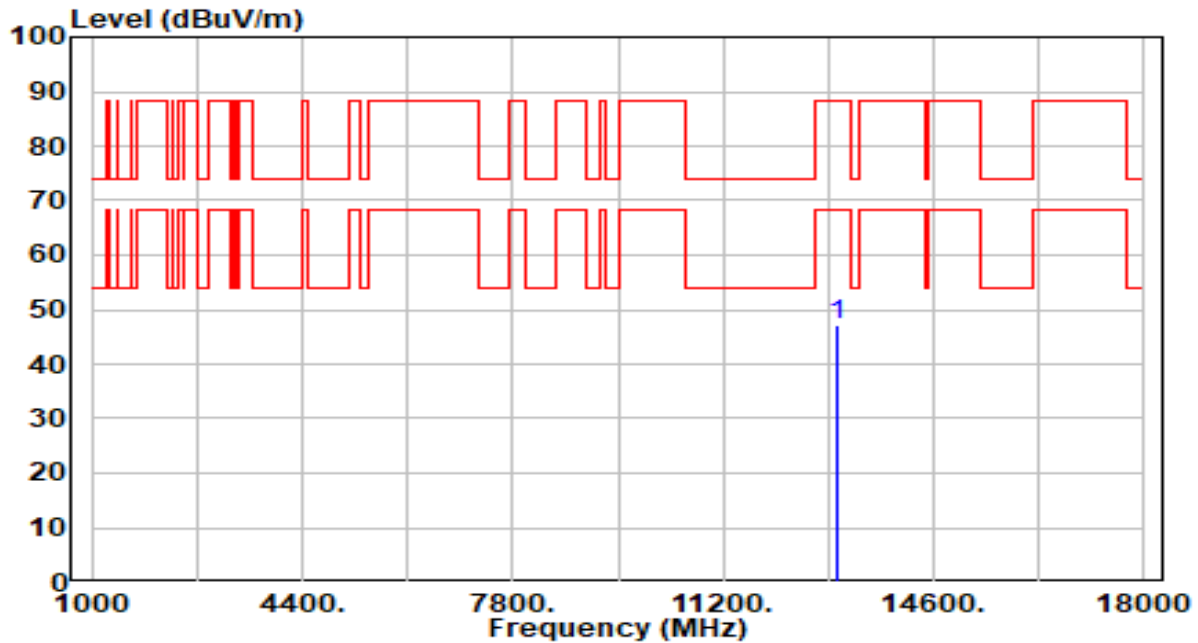


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13050.000     | 41.83          | 5.23       | 47.06                | -41.14      | 88.20          | 100         | 7           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band7_CH 123_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

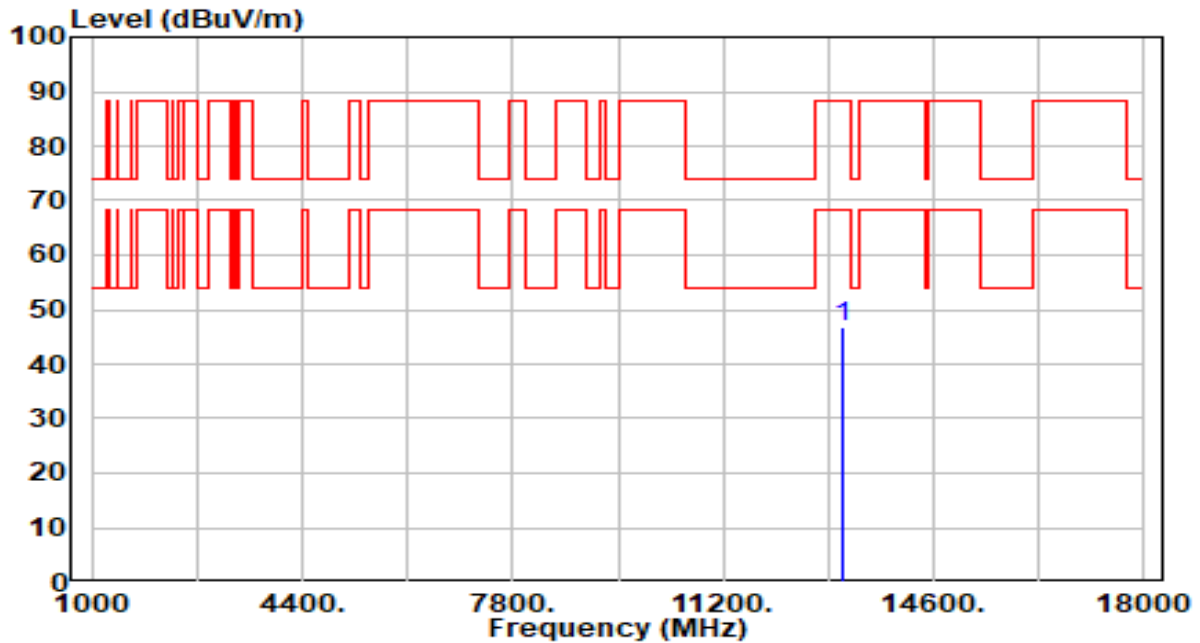


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13130.000     | 41.54          | 5.21       | 46.75                | -41.45      | 88.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band7_CH 123_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

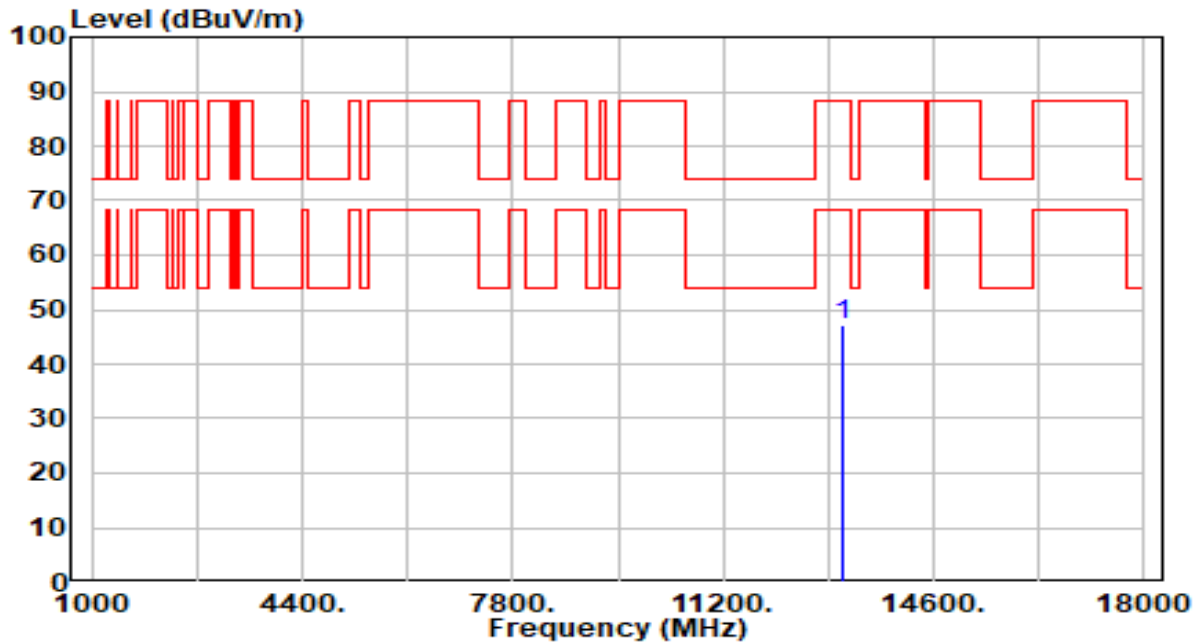


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13130.000     | 41.95          | 5.21       | 47.16                | -41.04      | 88.20          | 100         | 195         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band7_CH 147_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

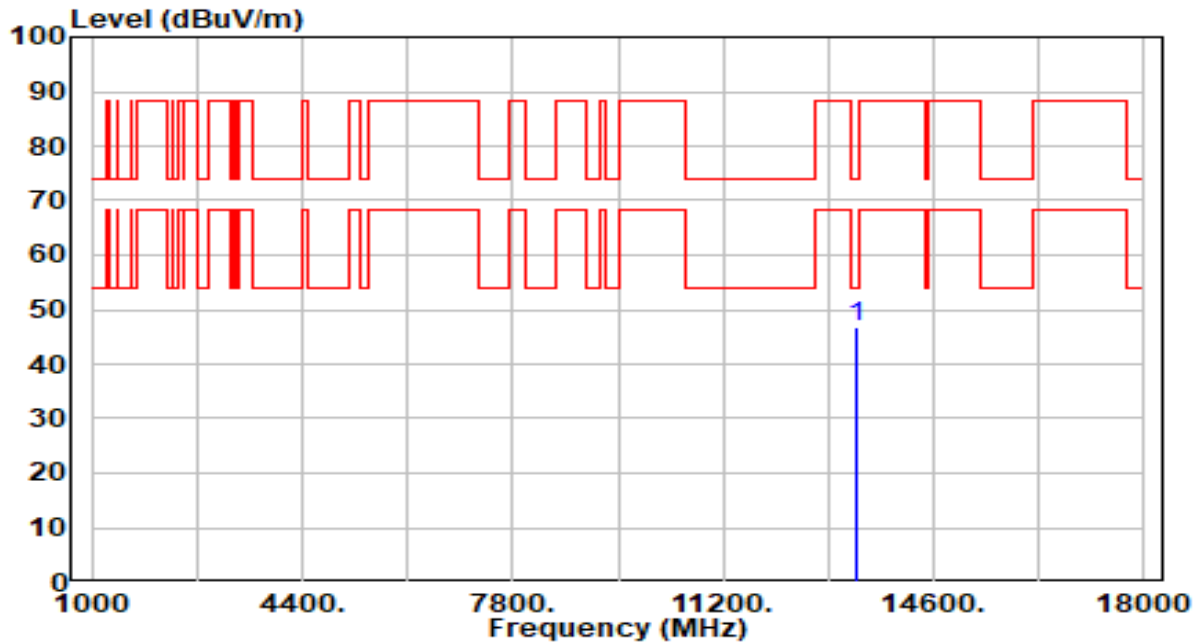


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13370.000     | 41.70          | 5.25       | 46.95                | -27.05      | 74.00          | 100         | 86          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band7_CH 147_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

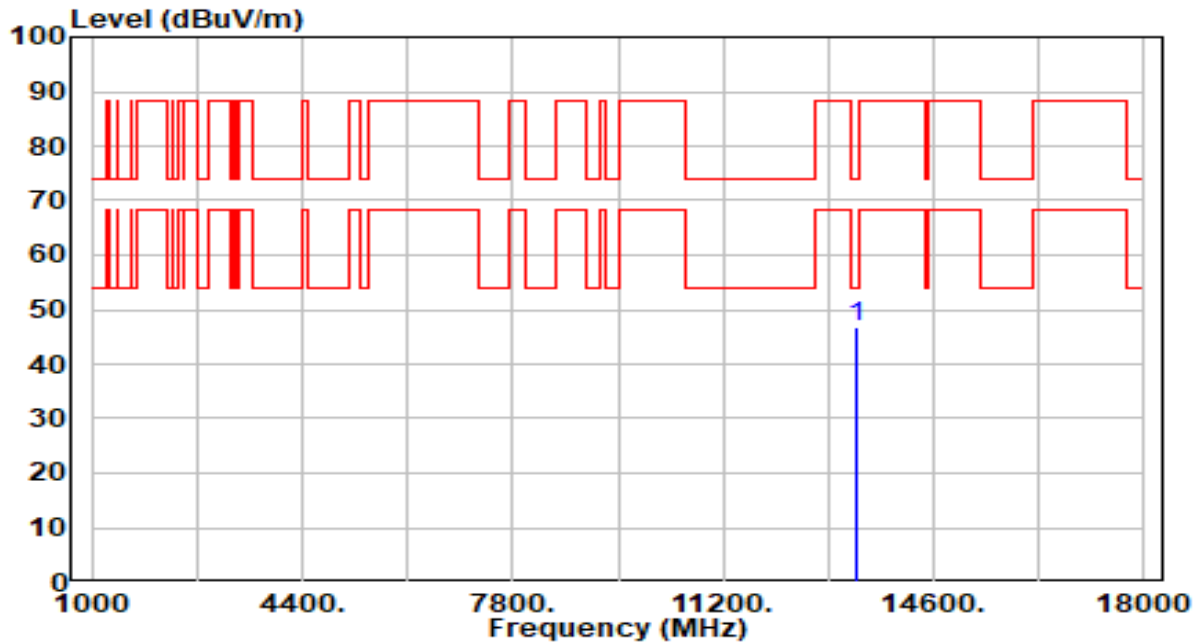


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13370.000     | 41.69          | 5.25       | 46.94                | -27.06      | 74.00          | 100         | 142         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band7_CH 179_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

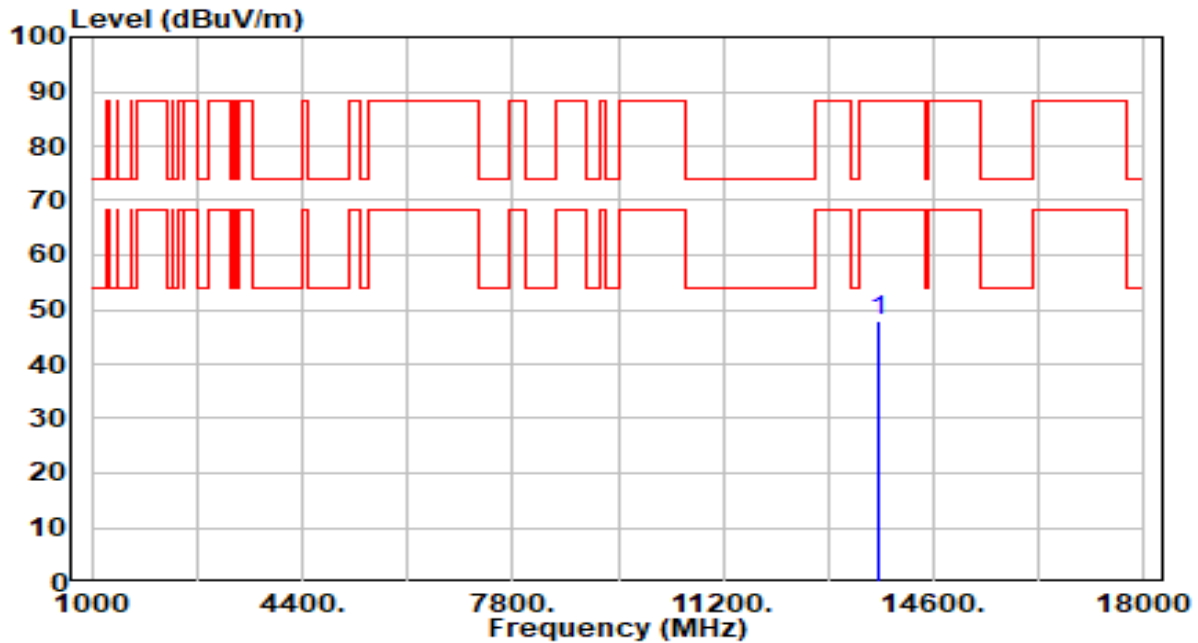


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 13690.000       | 42.73          | 5.02       | 47.75                | -40.45      | 88.20          | 100         | 187         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band7_CH 179_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

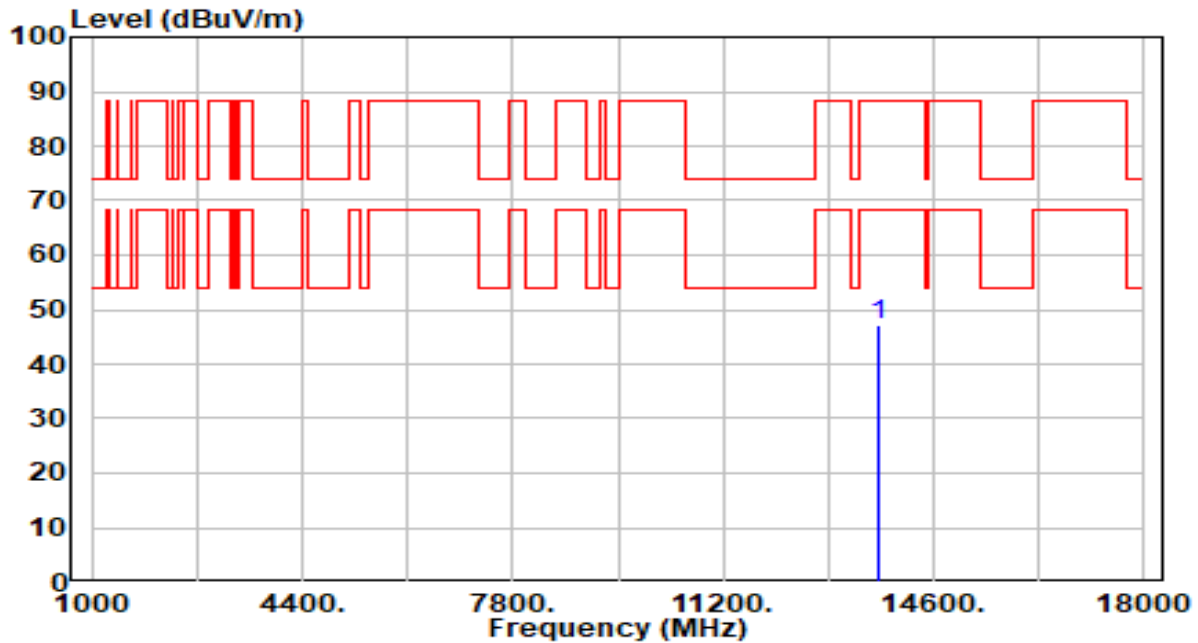


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13690.000     | 42.26          | 5.02       | 47.28                | -40.92      | 88.20          | 100         | 201         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band8_CH 187_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

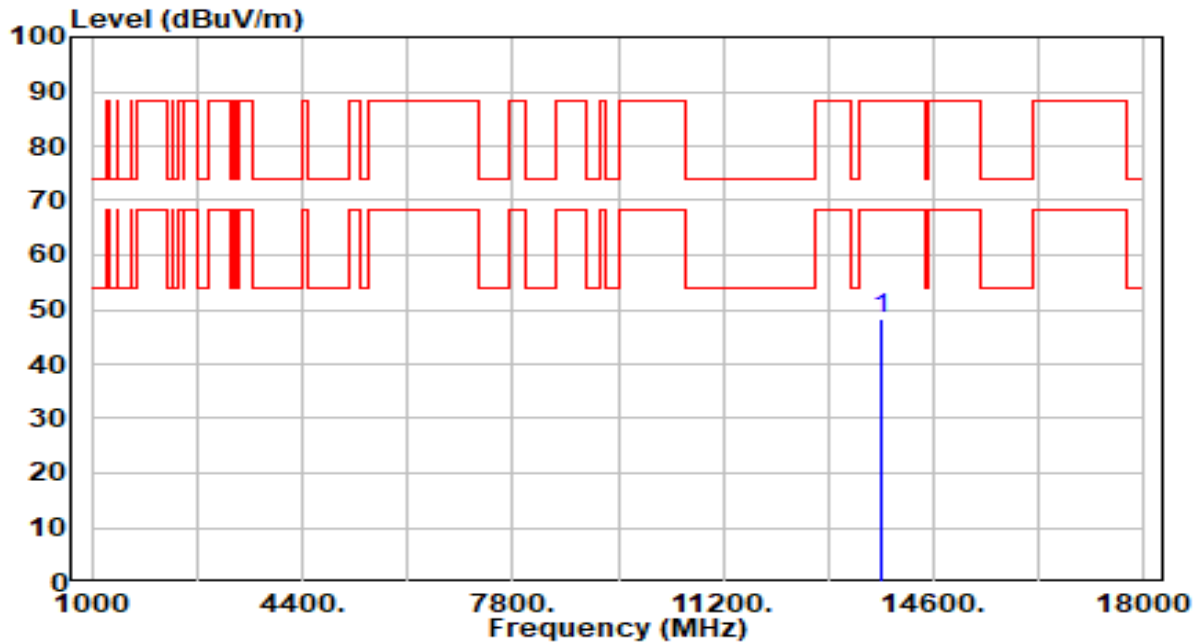


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13770.000     | 43.42          | 5.03       | 48.45                | -39.75      | 88.20          | 100         | 340         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band8_CH 187_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

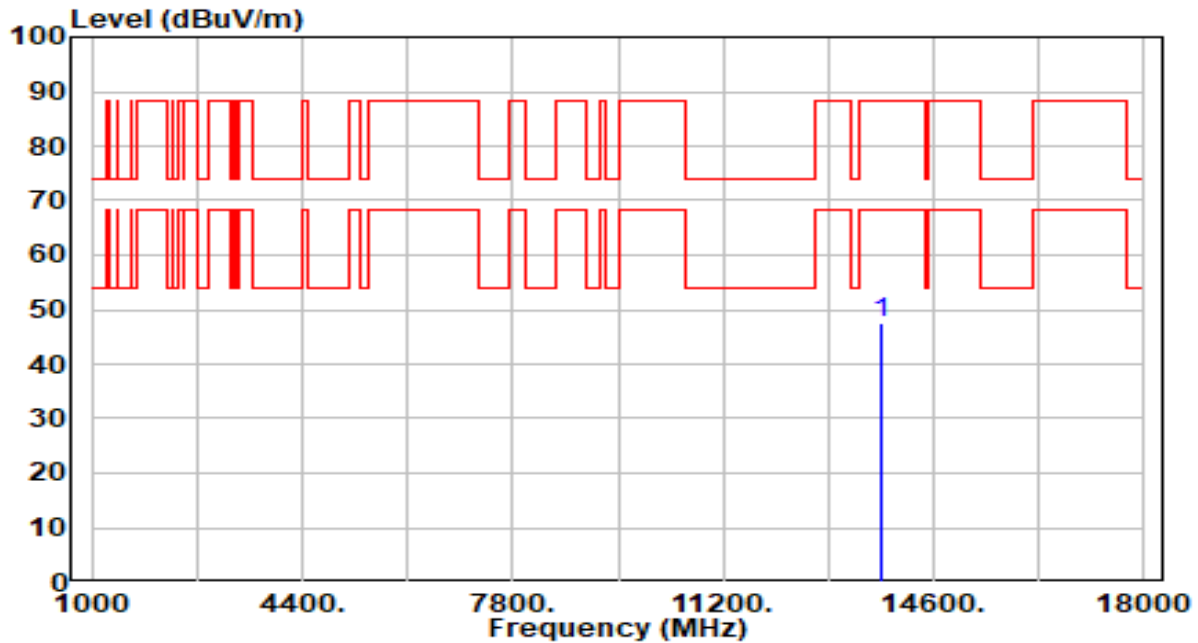


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13770.000     | 42.67          | 5.03       | 47.70                | -40.50      | 88.20          | 100         | 324         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band8_CH 195_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

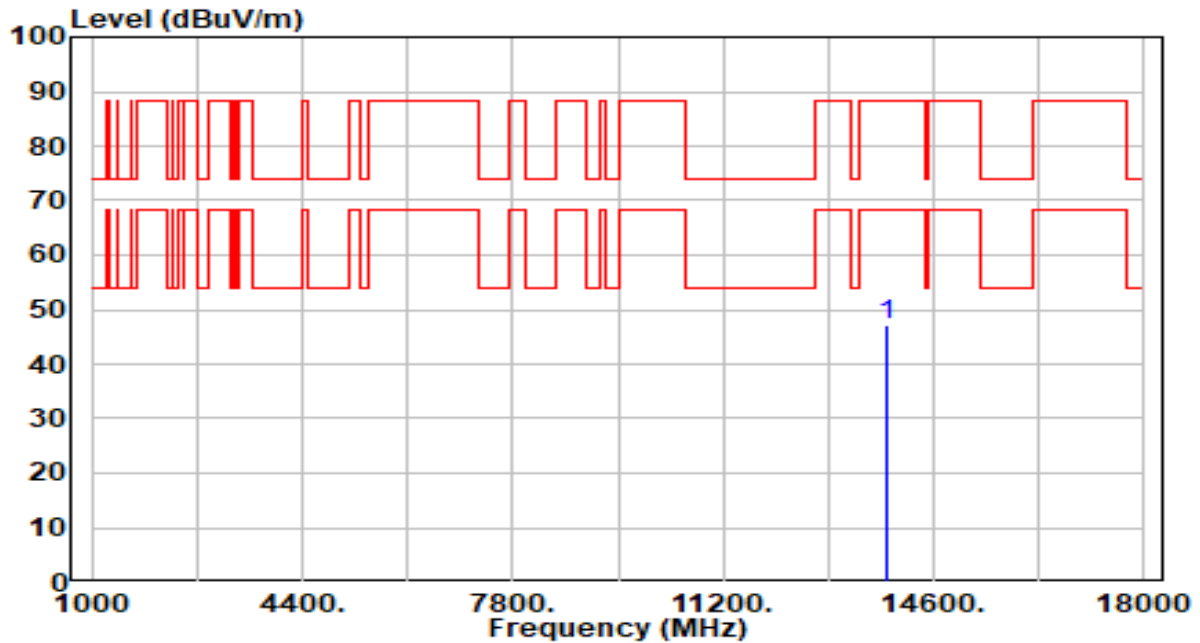


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13850.000     | 42.05          | 5.07       | 47.12                | -41.08      | 88.20          | 100         | 99          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band8_CH 195_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

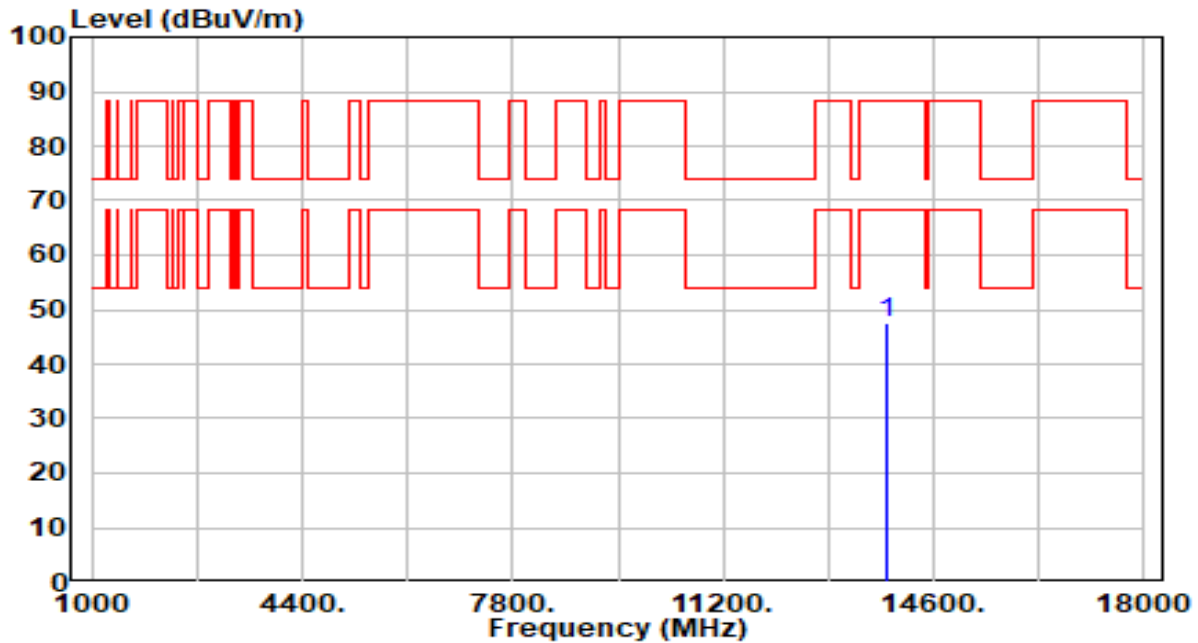


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13850.000     | 42.57          | 5.07       | 47.64                | -40.56      | 88.20          | 100         | 271         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band8_CH 211_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

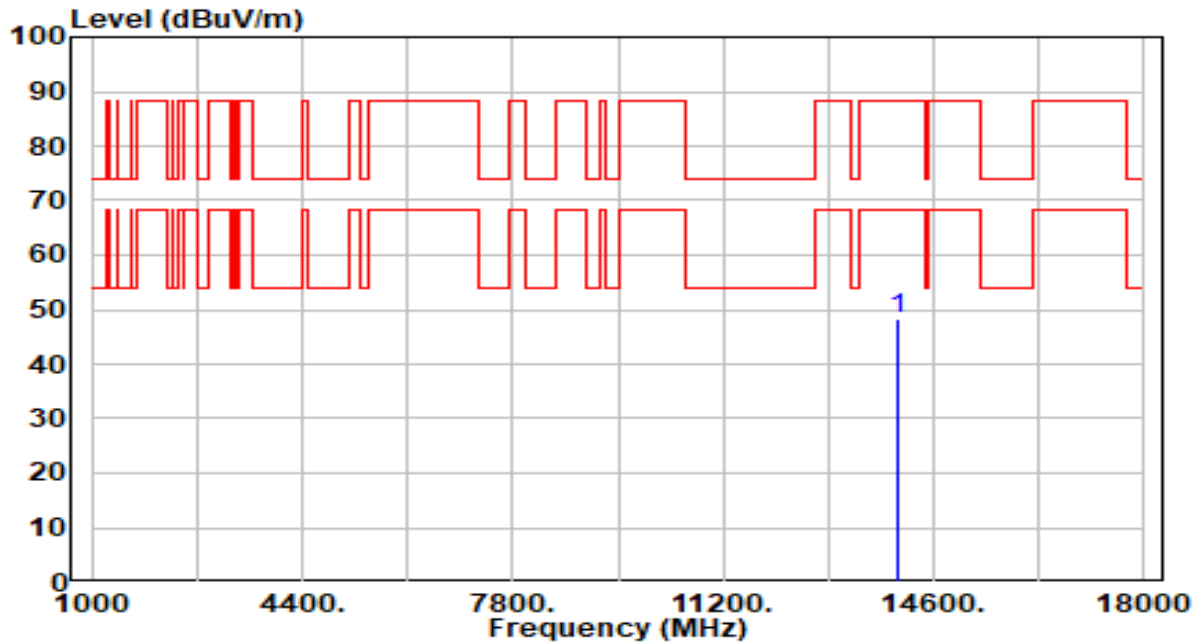


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14010.000     | 43.19          | 5.17       | 48.36                | -39.84      | 88.20          | 100         | 46          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band8_CH 211_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

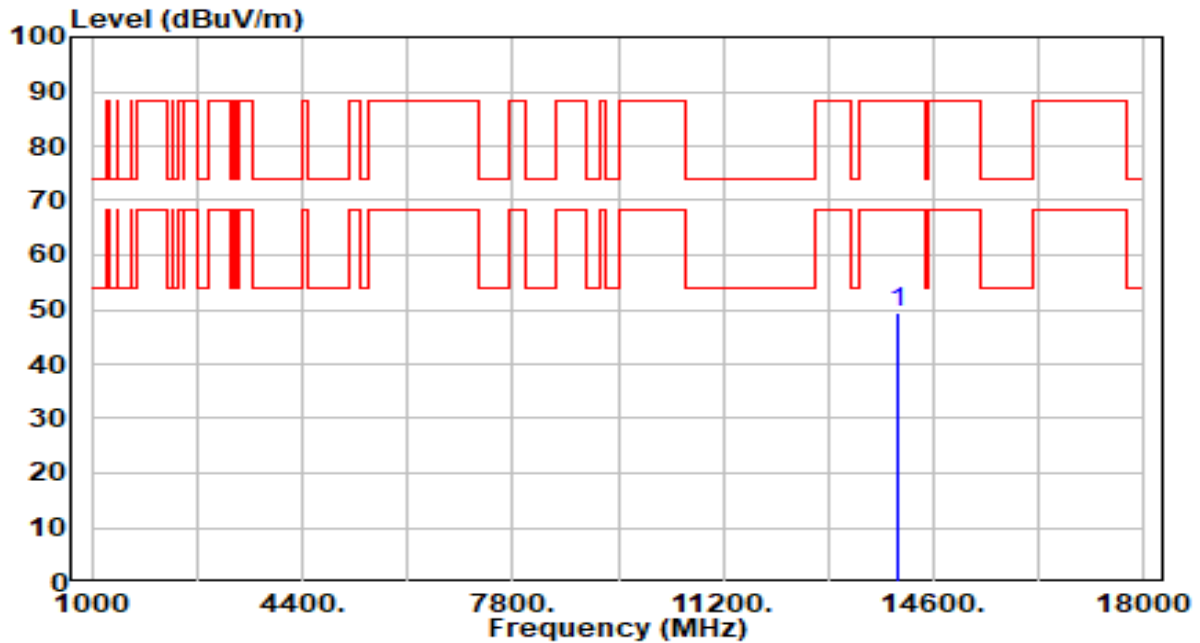


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14010.000     | 44.16          | 5.17       | 49.32                | -38.88      | 88.20          | 100         | 330         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

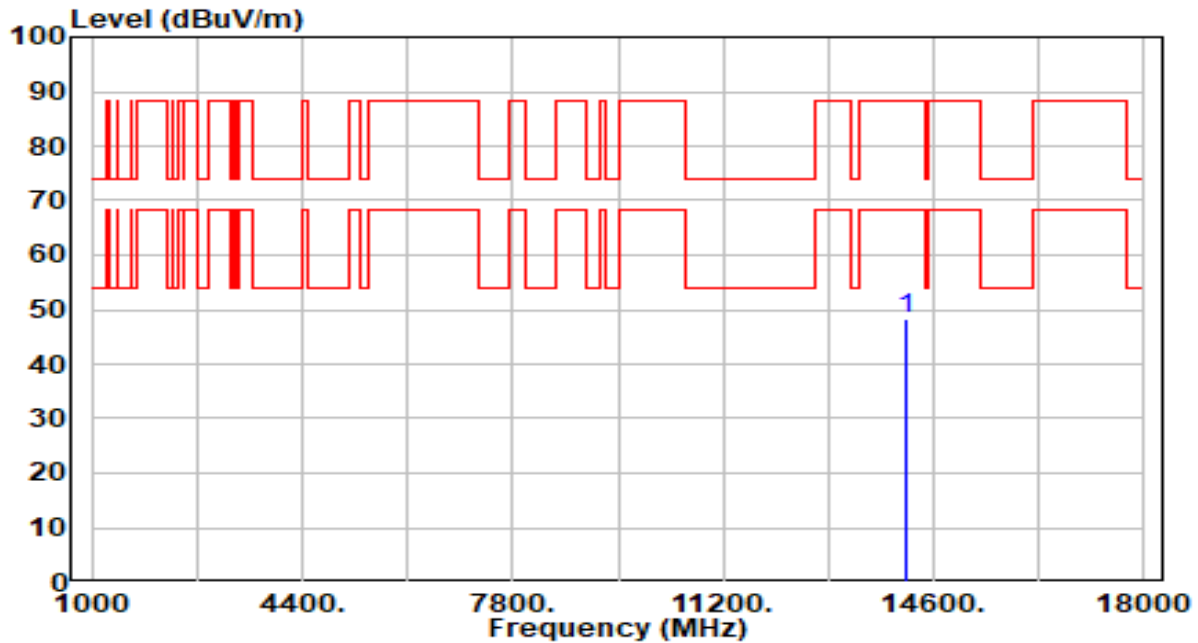


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14170.000     | 43.19          | 5.10       | 48.29                | -39.91      | 88.20          | 100         | 205         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

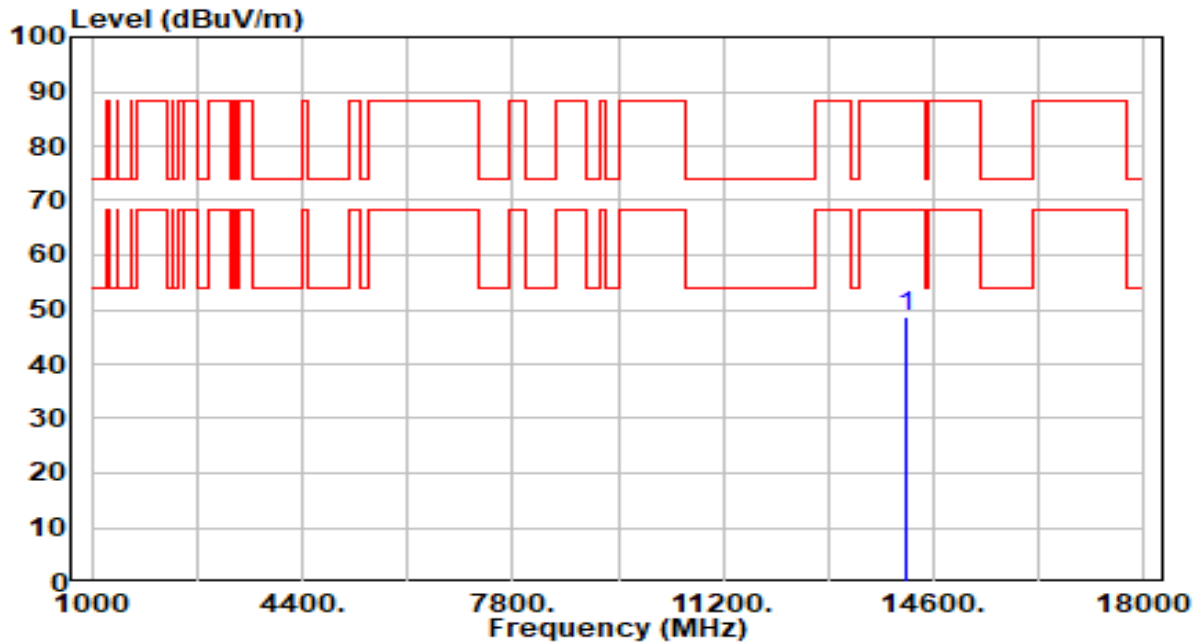


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14170.000     | 43.66          | 5.10       | 48.76                | -39.44      | 88.20          | 100         | 354         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band5_CH 7_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

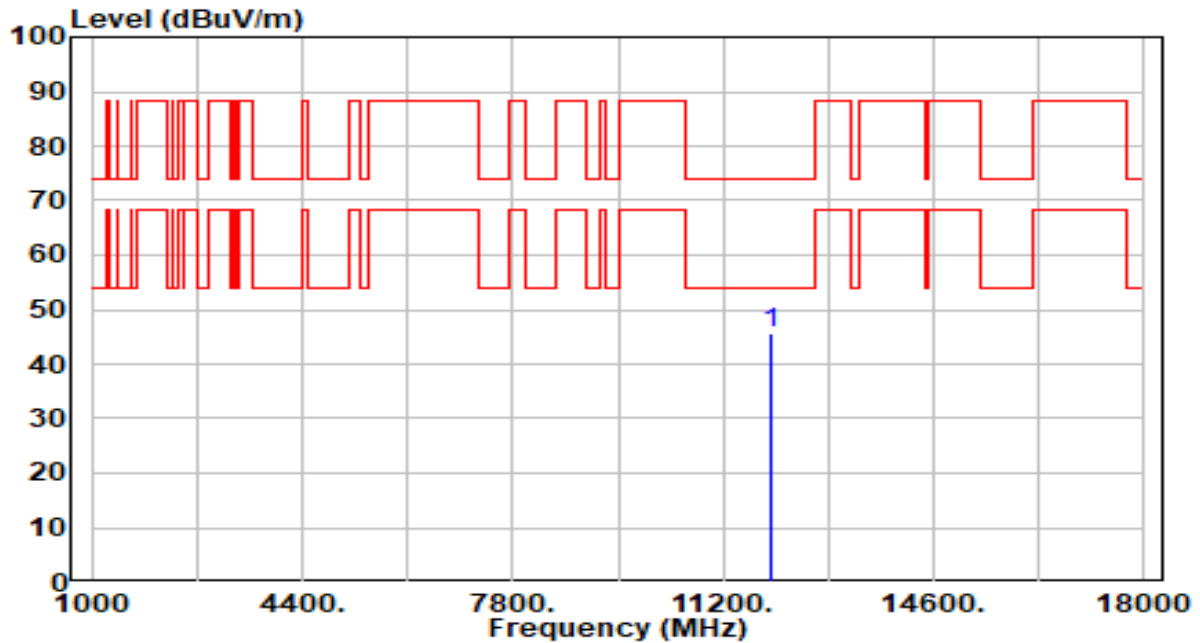


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 11970.000     | 41.84          | 3.87       | 45.72                | -28.28      | 74.00          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band5_CH 7_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

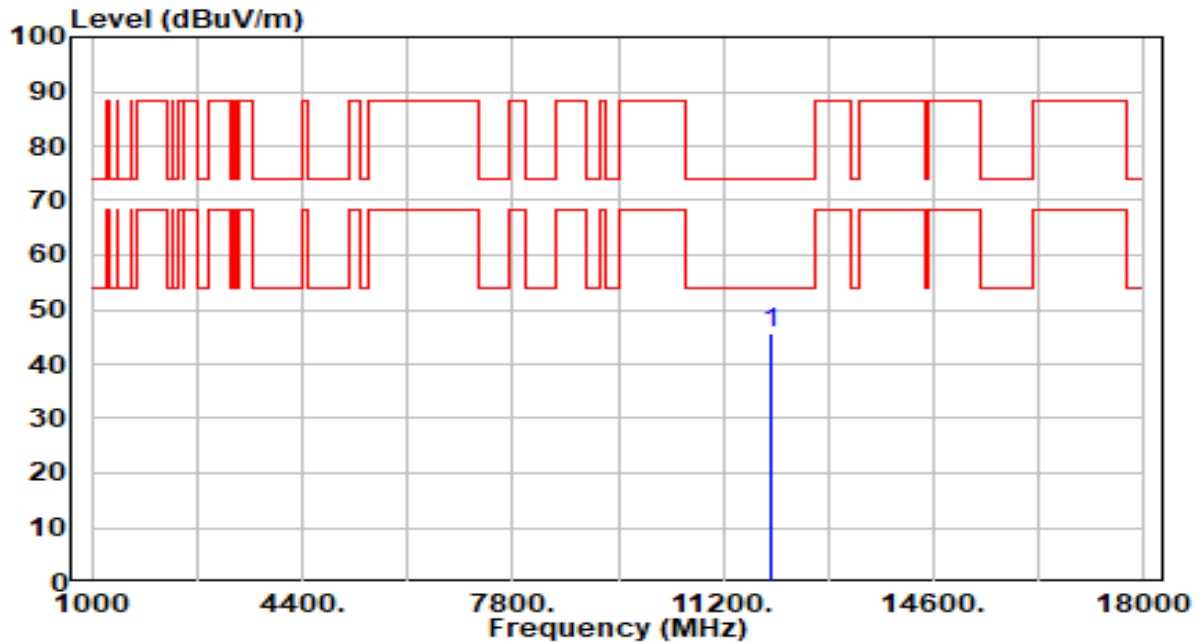


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 11970.000     | 41.93          | 3.87       | 45.80                | -28.20      | 74.00          | 100         | 246         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

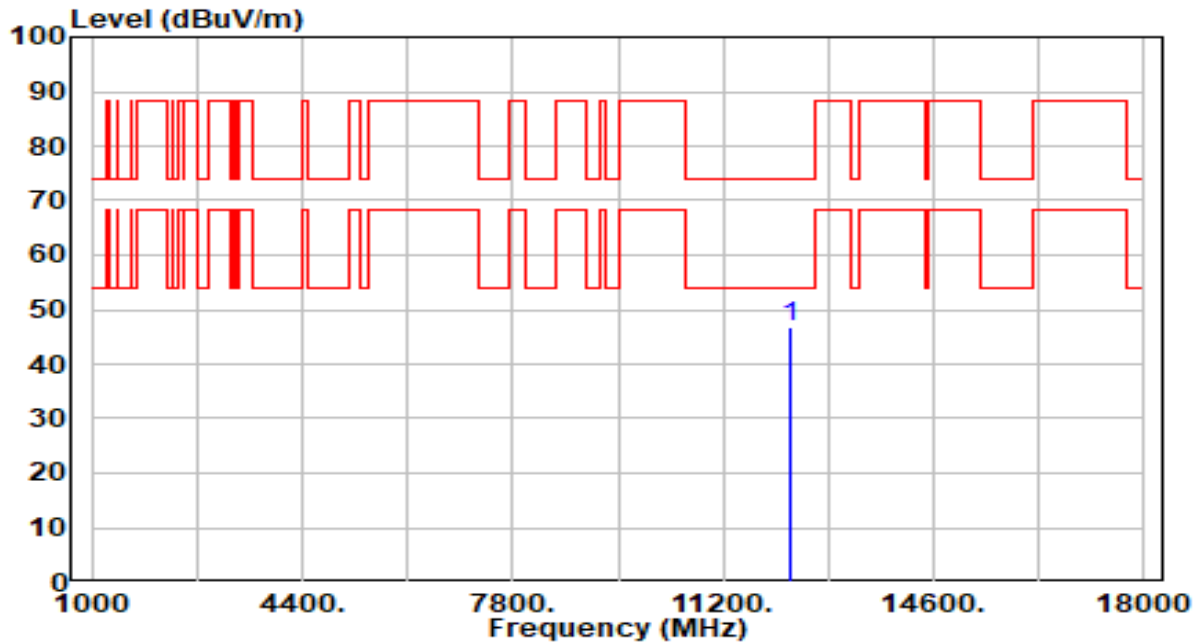


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12290.000     | 42.34          | 4.41       | 46.75                | -27.25      | 74.00          | 100         | 115         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

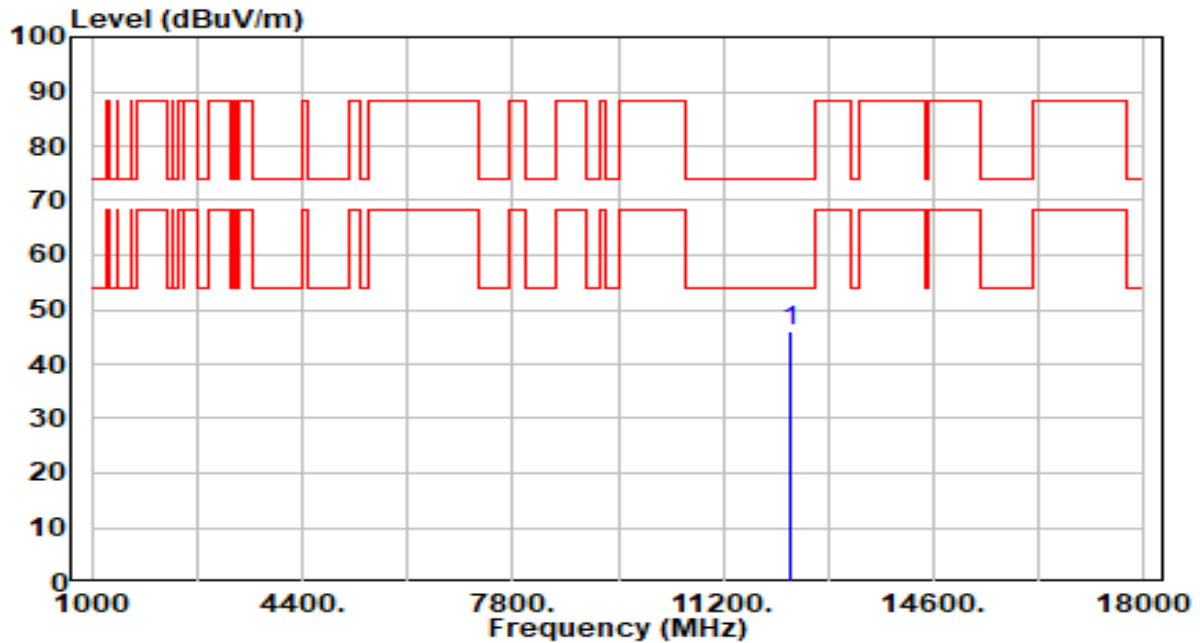


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12290.000     | 41.67          | 4.41       | 46.08                | -27.92      | 74.00          | 100         | 268         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band5_CH 87_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

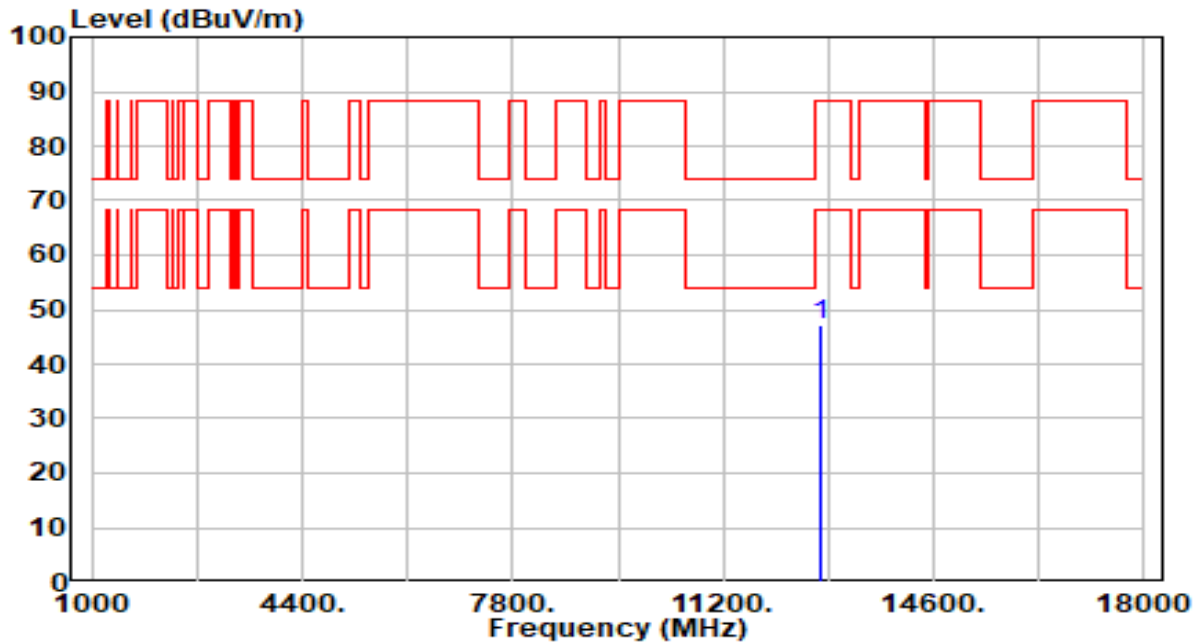


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 12770.000       | 41.98          | 5.28       | 47.26                | -40.94      | 88.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router             | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band5_CH 87_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

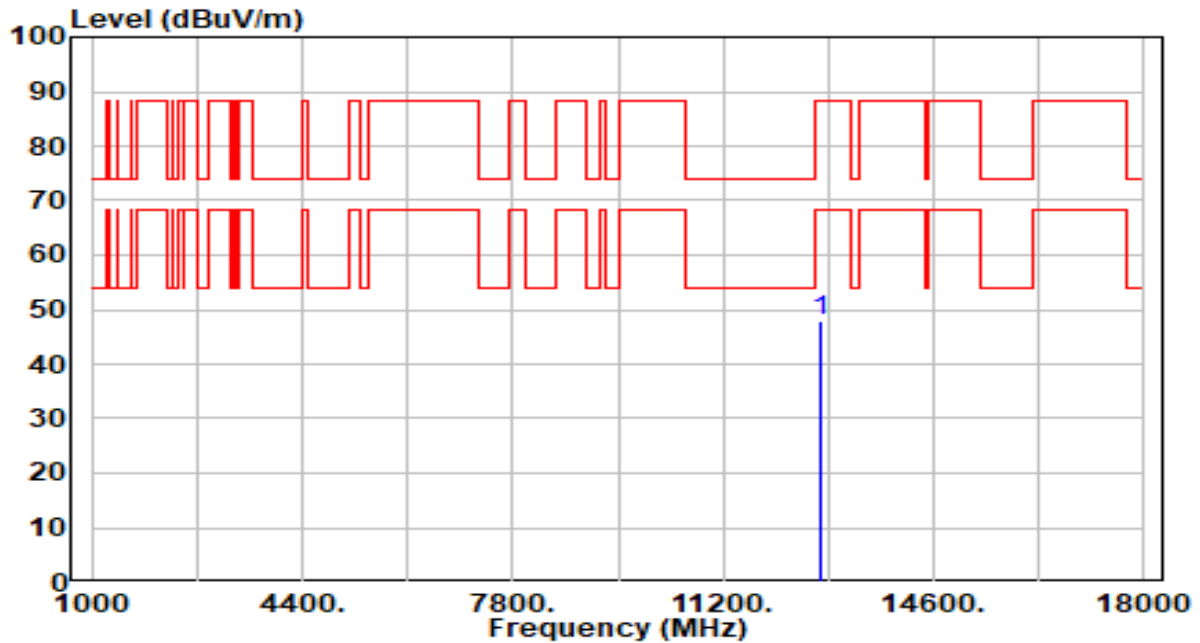


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12770.000     | 42.69          | 5.28       | 47.97                | -40.23      | 88.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band6_CH 103_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

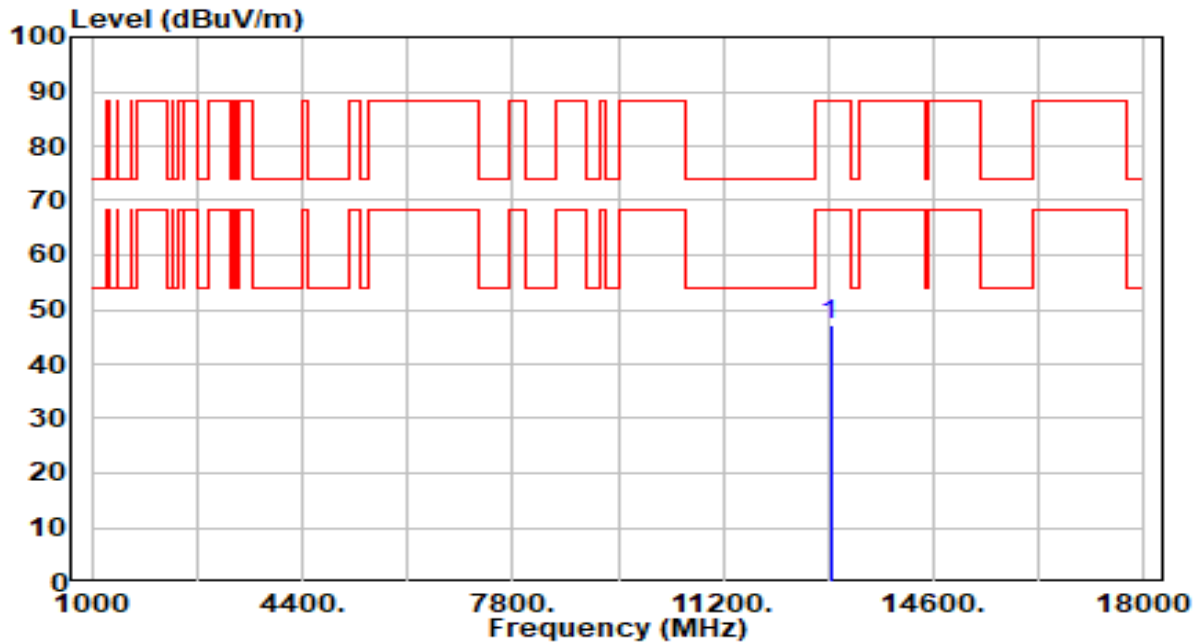


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12930.000     | 41.95          | 5.26       | 47.21                | -40.99      | 88.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band6_CH 103_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

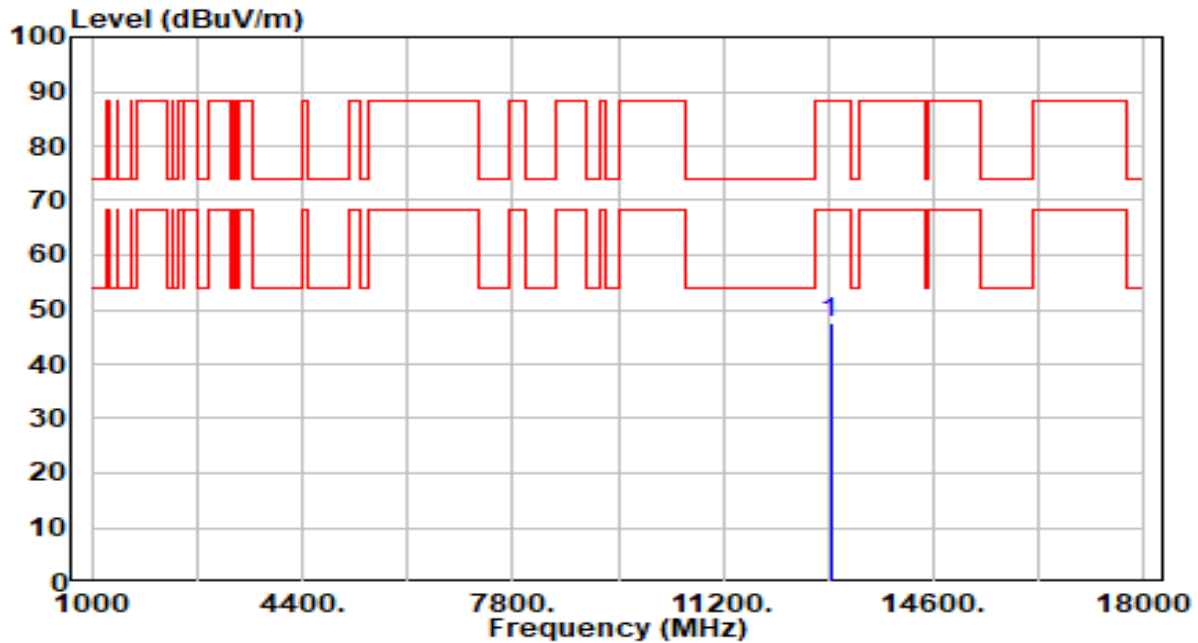


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12930.000     | 42.18          | 5.26       | 47.44                | -40.76      | 88.20          | 100         | 121         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band7_CH 119_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

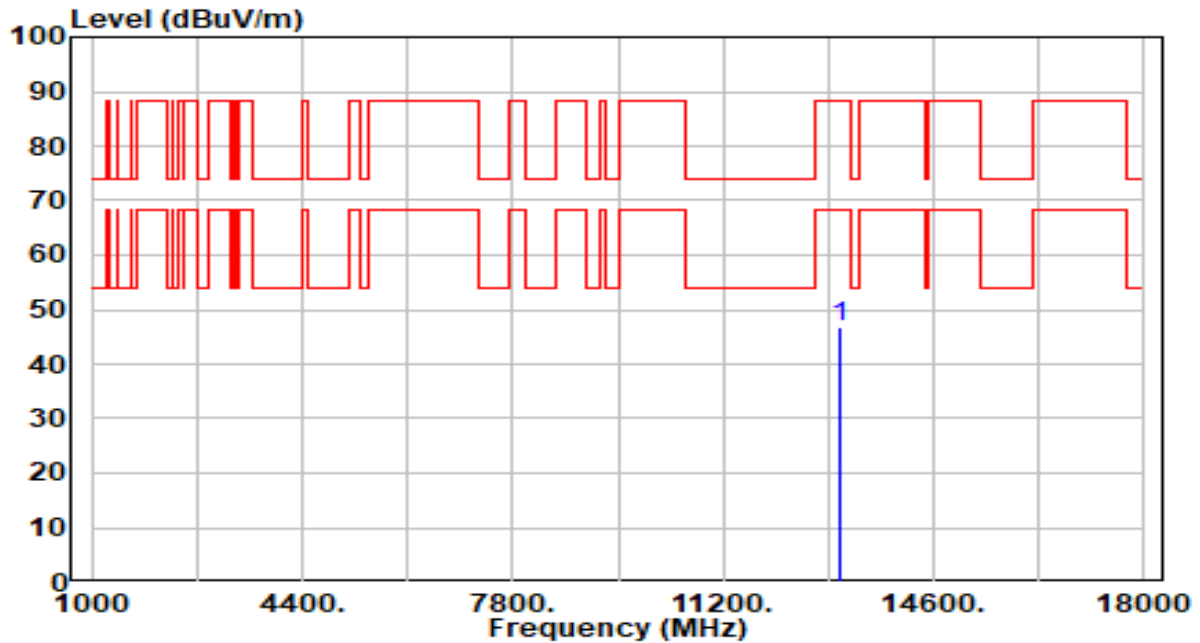


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13090.000     | 41.57          | 5.22       | 46.79                | -41.41      | 88.20          | 100         | 93          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band7_CH 119_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

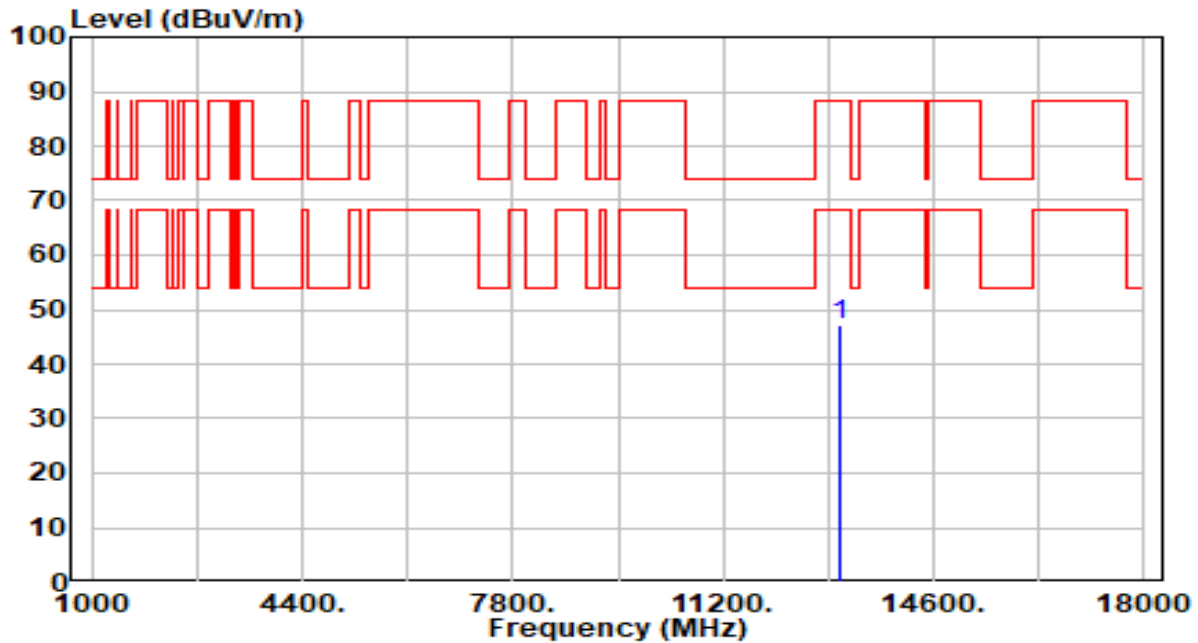


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13090.000     | 41.85          | 5.22       | 47.07                | -41.13      | 88.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band7_CH 135_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

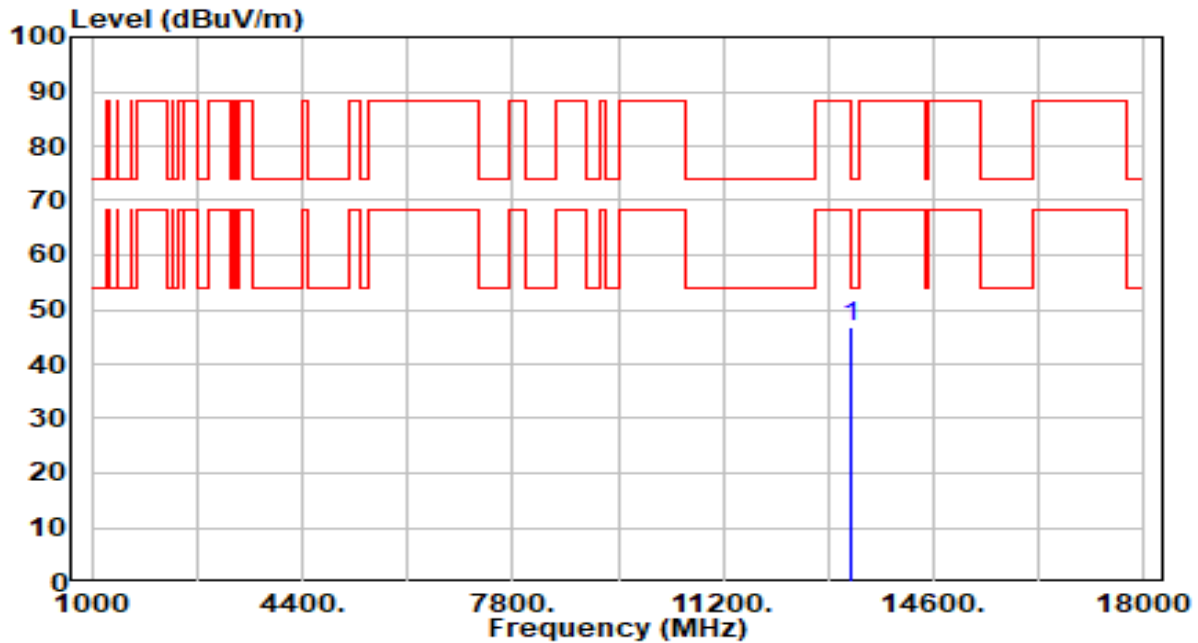


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13250.000     | 41.56          | 5.22       | 46.78                | -27.22      | 74.00          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band7_CH 135_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

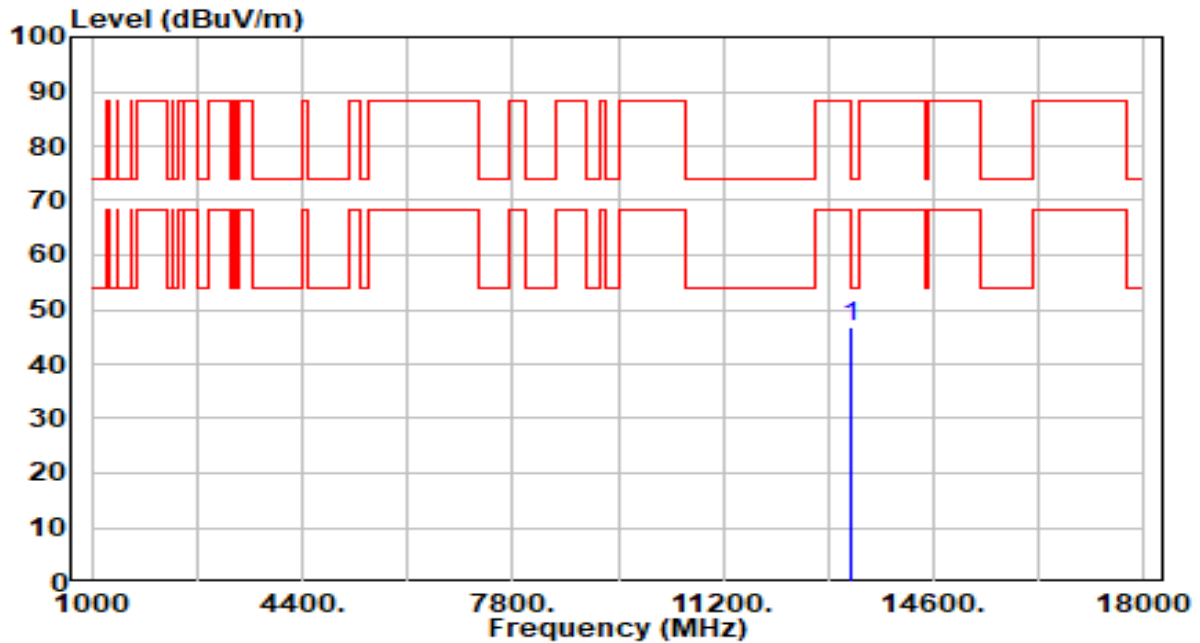


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13250.000     | 41.69          | 5.22       | 46.91                | -27.09      | 74.00          | 100         | 234         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band7_CH 151_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

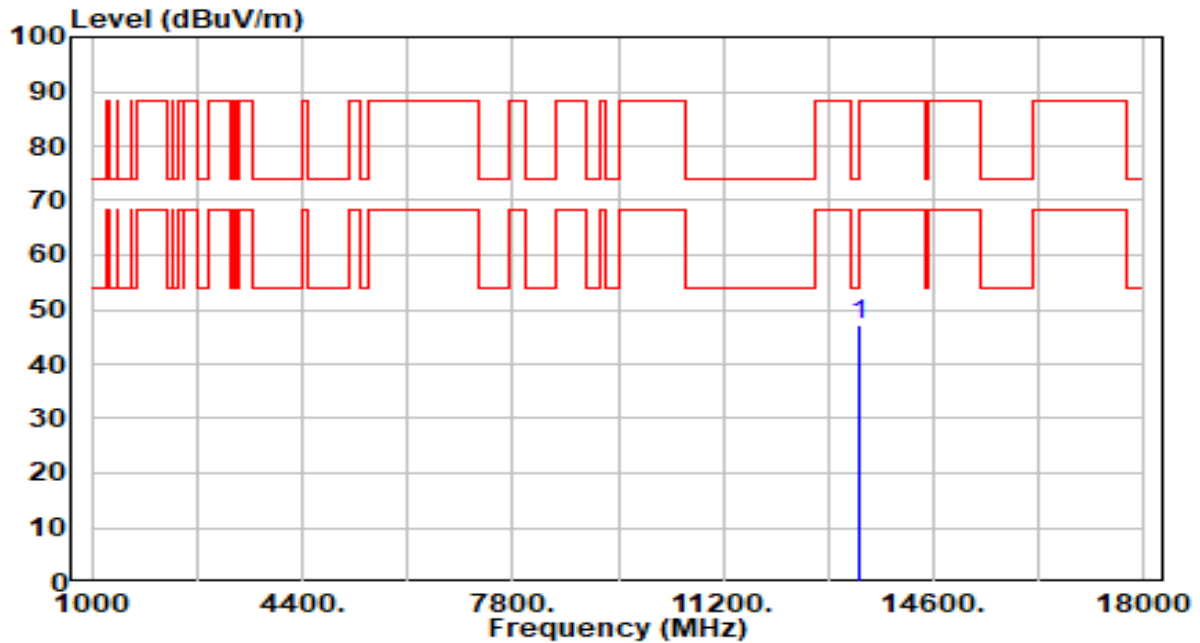


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13410.000     | 41.77          | 5.25       | 47.02                | -41.18      | 88.20          | 100         | 302         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band7_CH 151_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

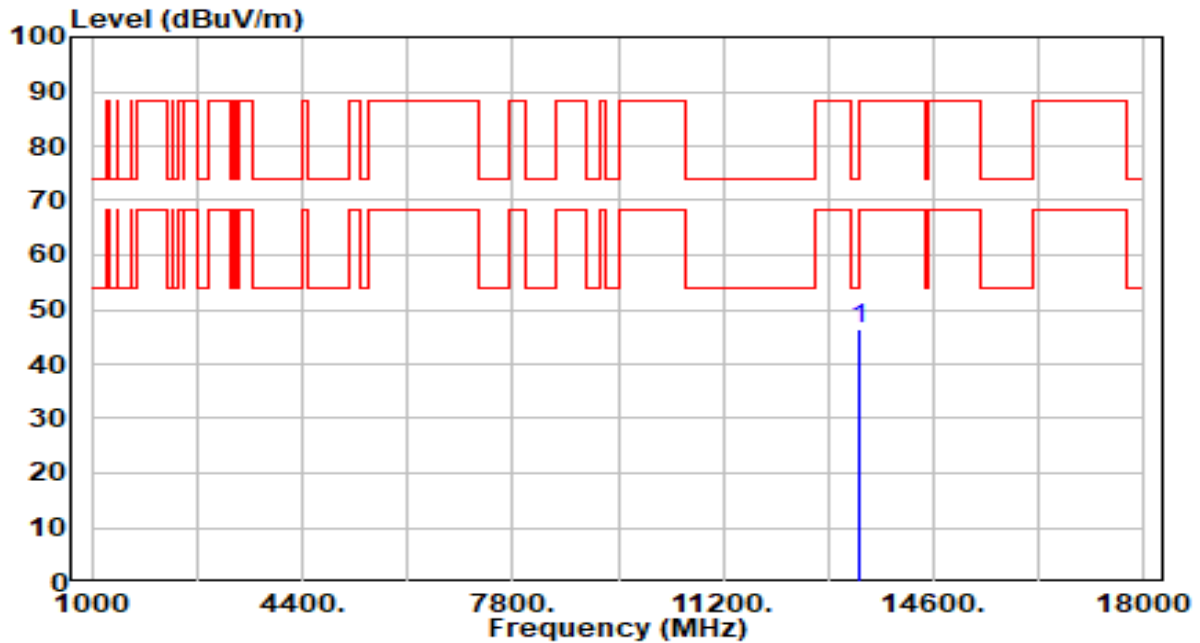


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13410.000     | 41.33          | 5.25       | 46.59                | -41.61      | 88.20          | 100         | 126         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band7_CH 167_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

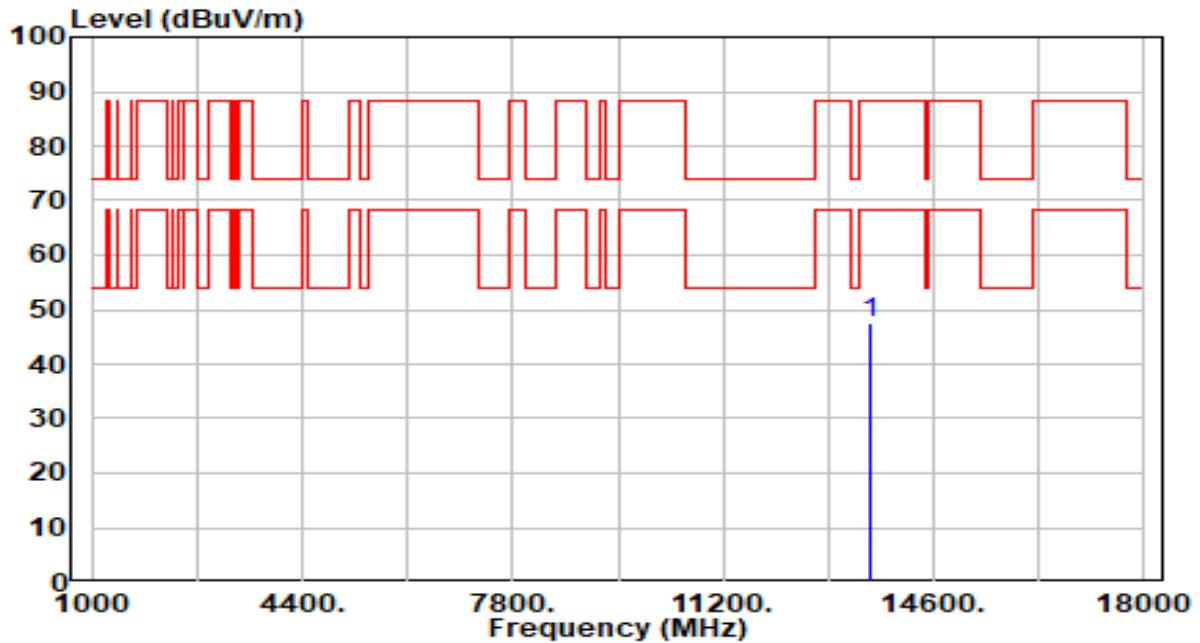


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13570.000     | 42.53          | 5.06       | 47.59                | -40.61      | 88.20          | 100         | 277         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band7_CH 167_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

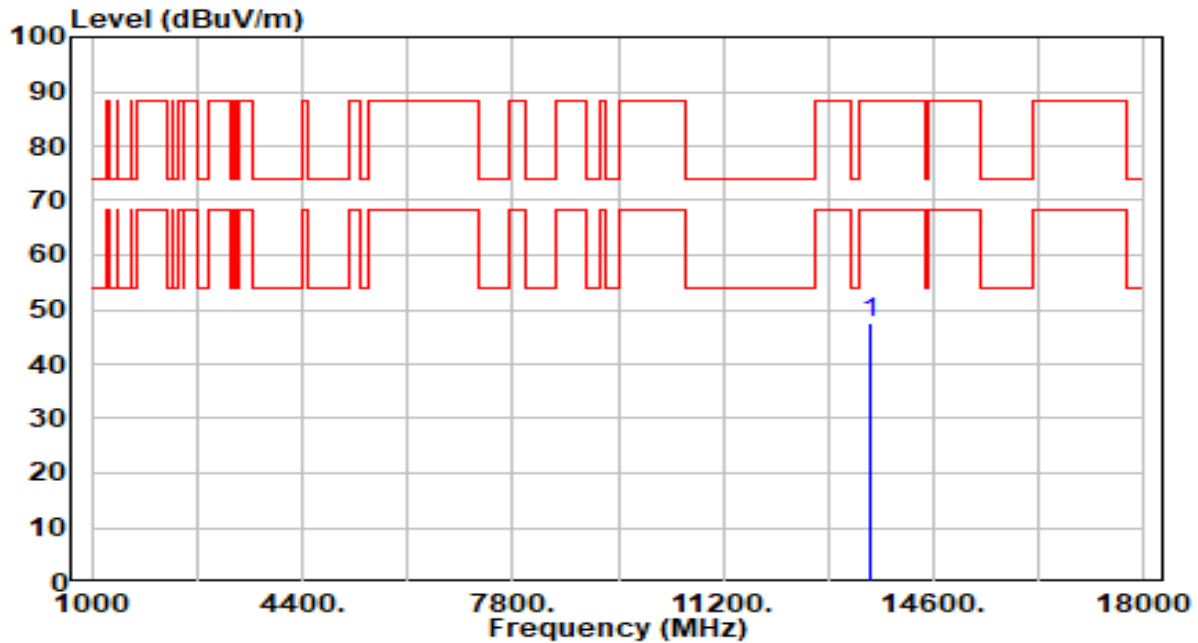


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13570.000     | 42.55          | 5.06       | 47.61                | -40.59      | 88.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band7_CH 183_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

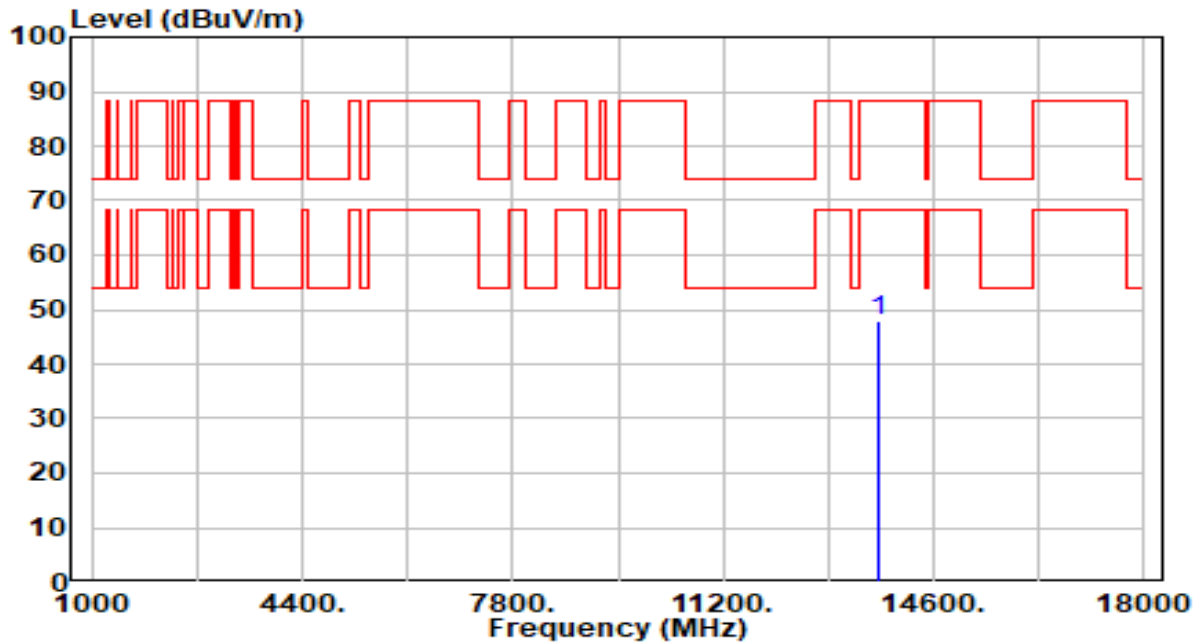


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13730.000     | 42.83          | 5.03       | 47.86                | -40.34      | 88.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band7_CH 183_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

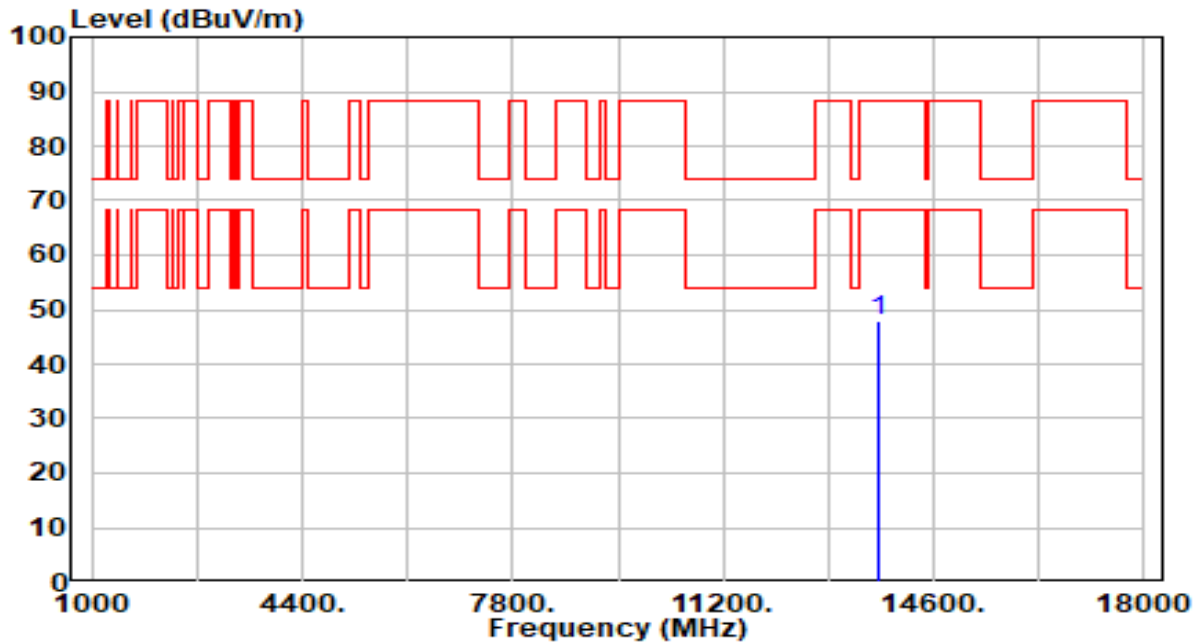


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13730.000     | 42.78          | 5.03       | 47.81                | -40.39      | 88.20          | 100         | 67          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band8_CH 199_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

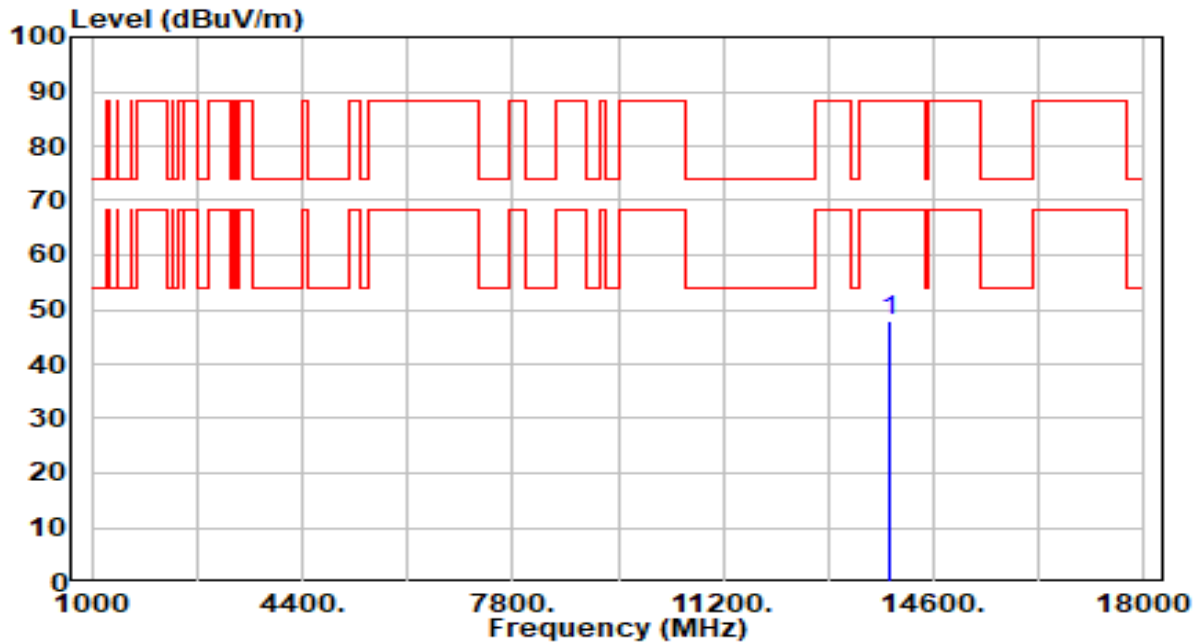


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13890.000     | 42.64          | 5.10       | 47.74                | -40.46      | 88.20          | 100         | 231         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band8_CH 199_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

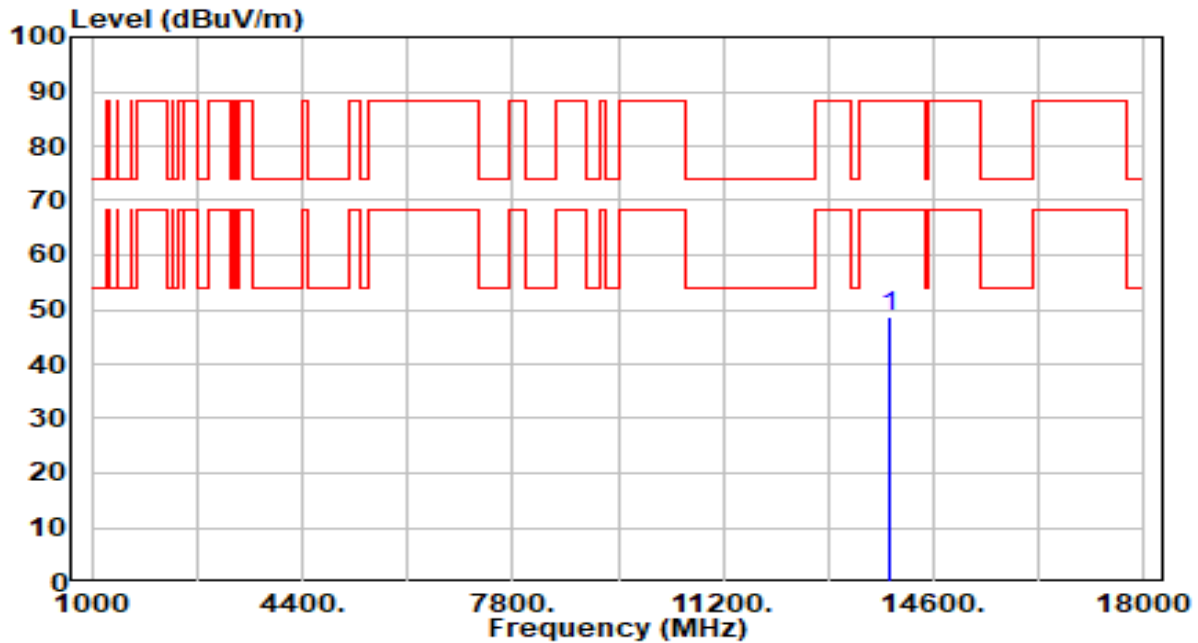


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13890.000     | 43.59          | 5.10       | 48.69                | -39.51      | 88.20          | 100         | 249         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

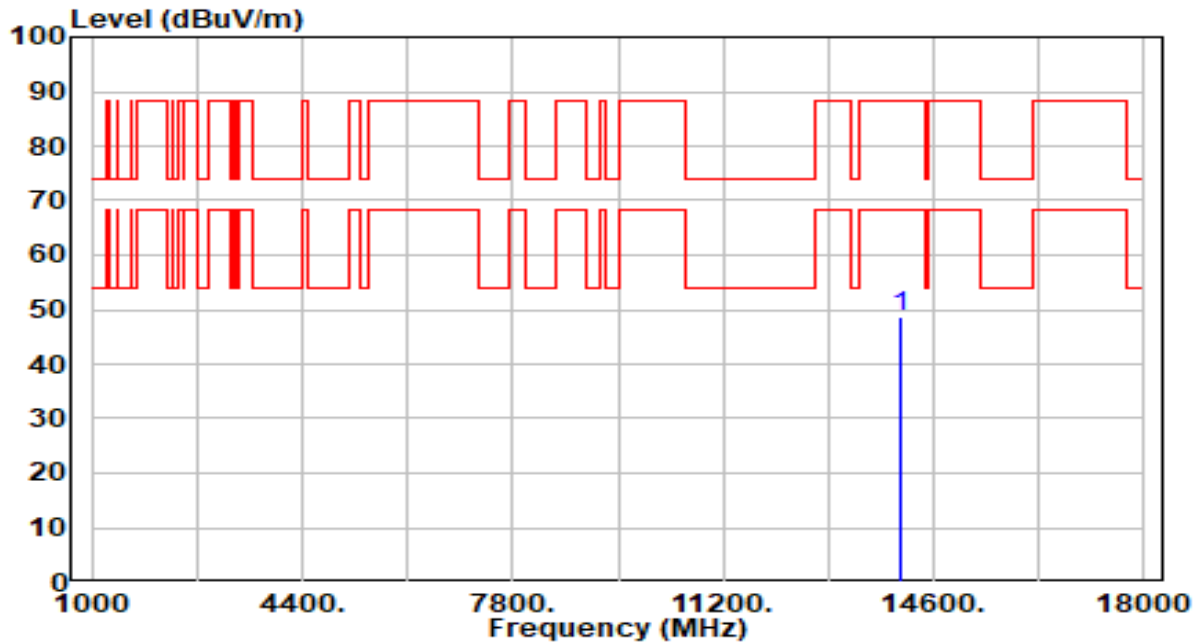


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 14050.000       | 43.34          | 5.15       | 48.49                | -39.71      | 88.20          | 100         | 322         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

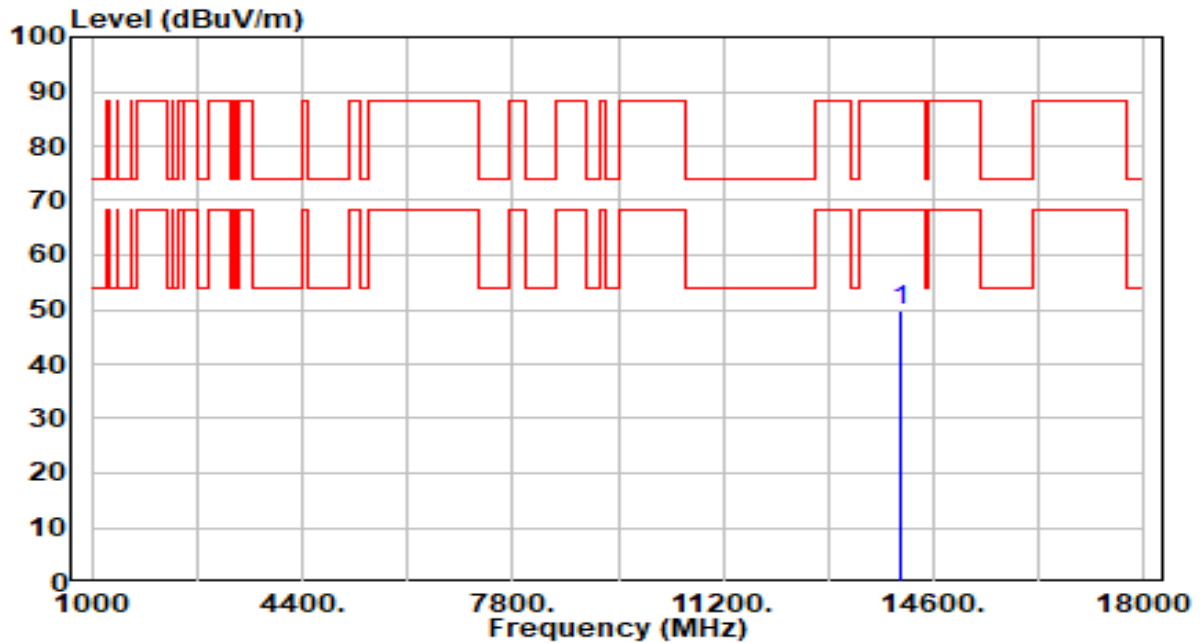


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14050.000     | 44.65          | 5.15       | 49.79                | -38.41      | 88.20          | 100         | 271         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band5_CH 15_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

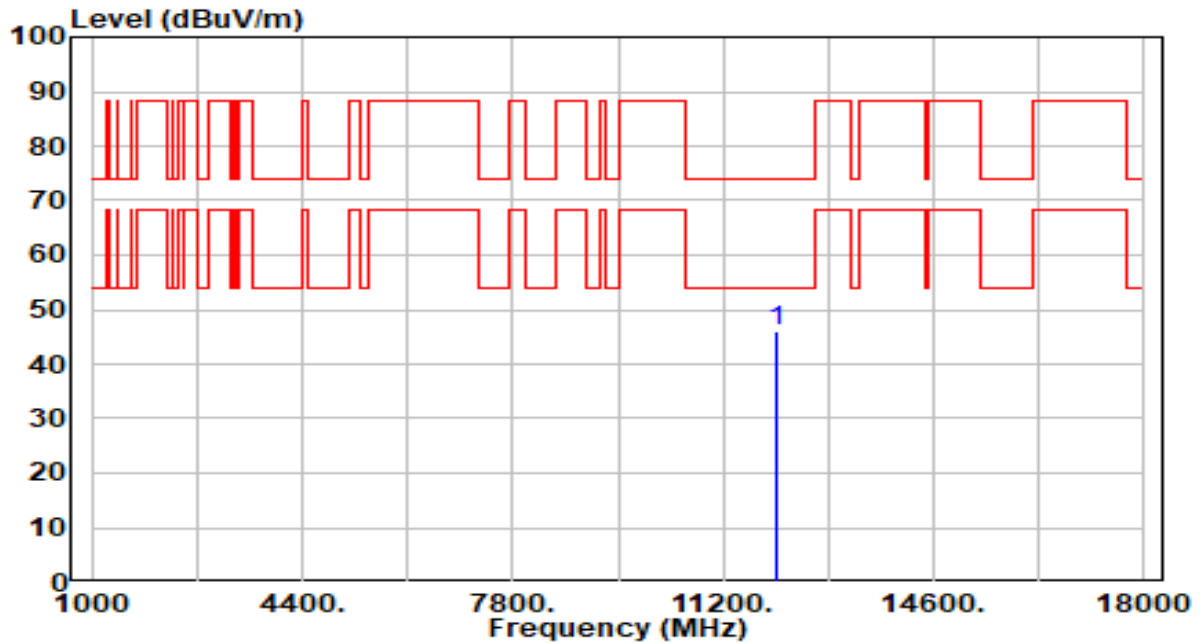


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12050.000     | 41.87          | 4.01       | 45.89                | -28.11      | 74.00          | 100         | 178         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band5_CH 15_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

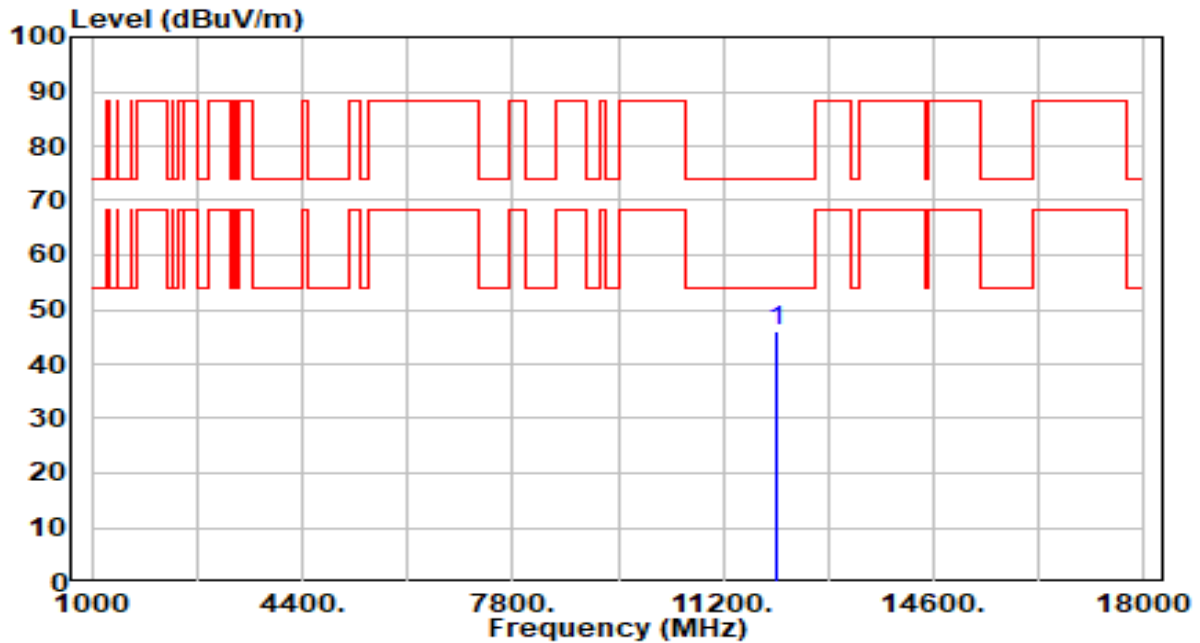


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12050.000     | 42.10          | 4.01       | 46.12                | -27.88      | 74.00          | 100         | 202         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

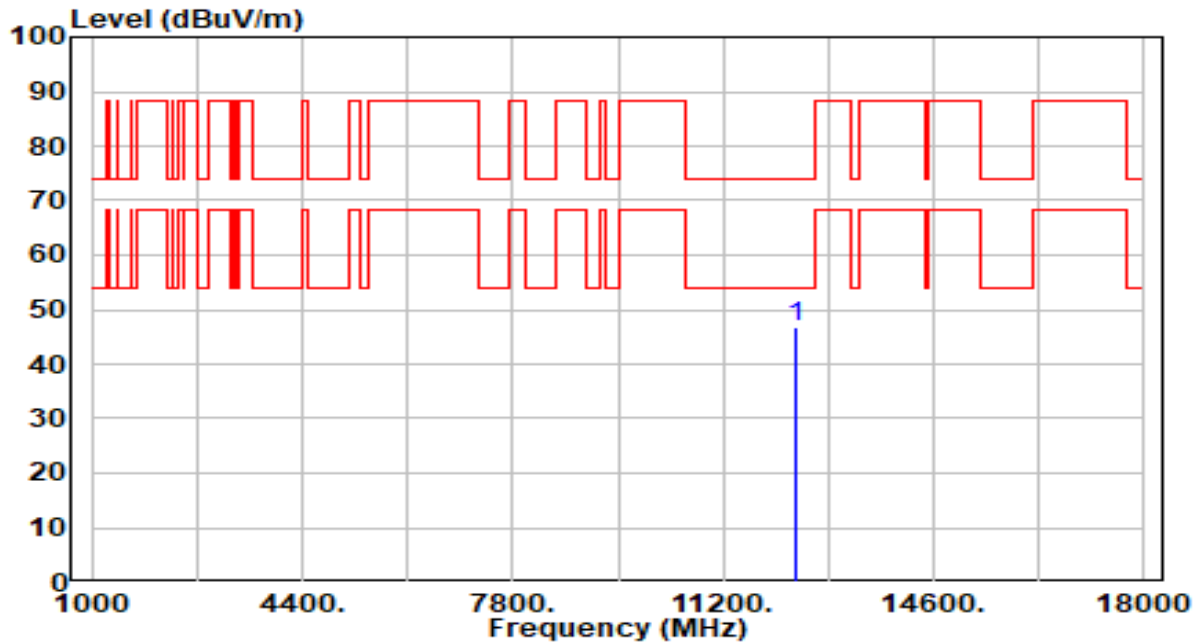


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12370.000     | 42.27          | 4.52       | 46.79                | -27.21      | 74.00          | 100         | 139         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

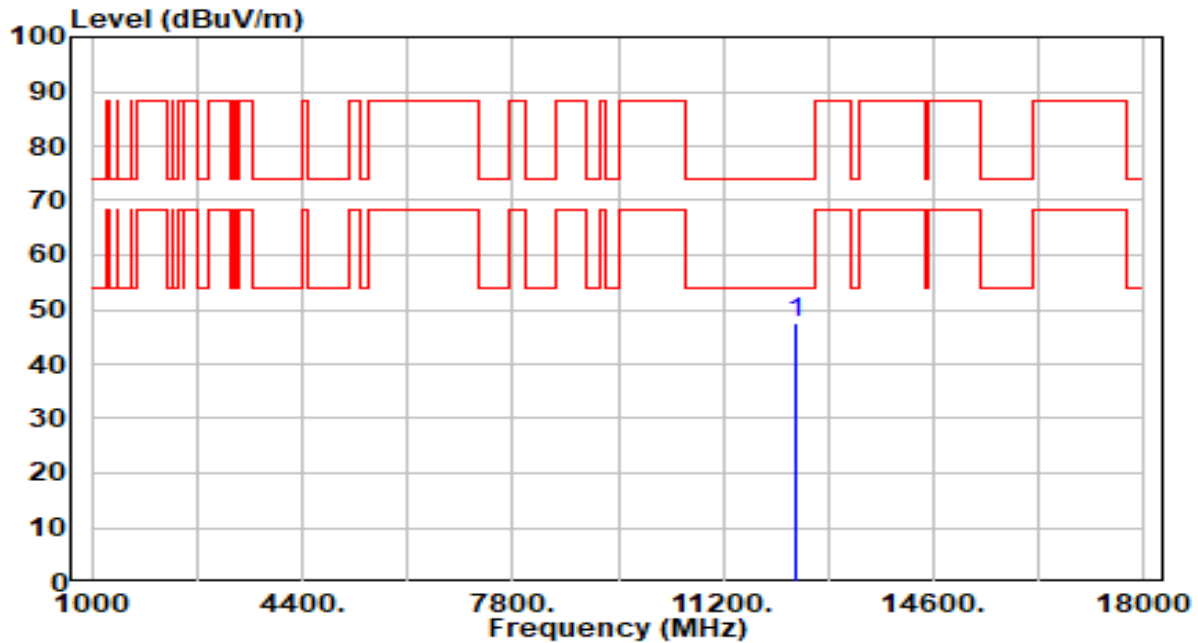


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 12370.000       | 42.85          | 4.52       | 47.38                | -26.62      | 74.00          | 100         | 280         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band5_CH 79_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

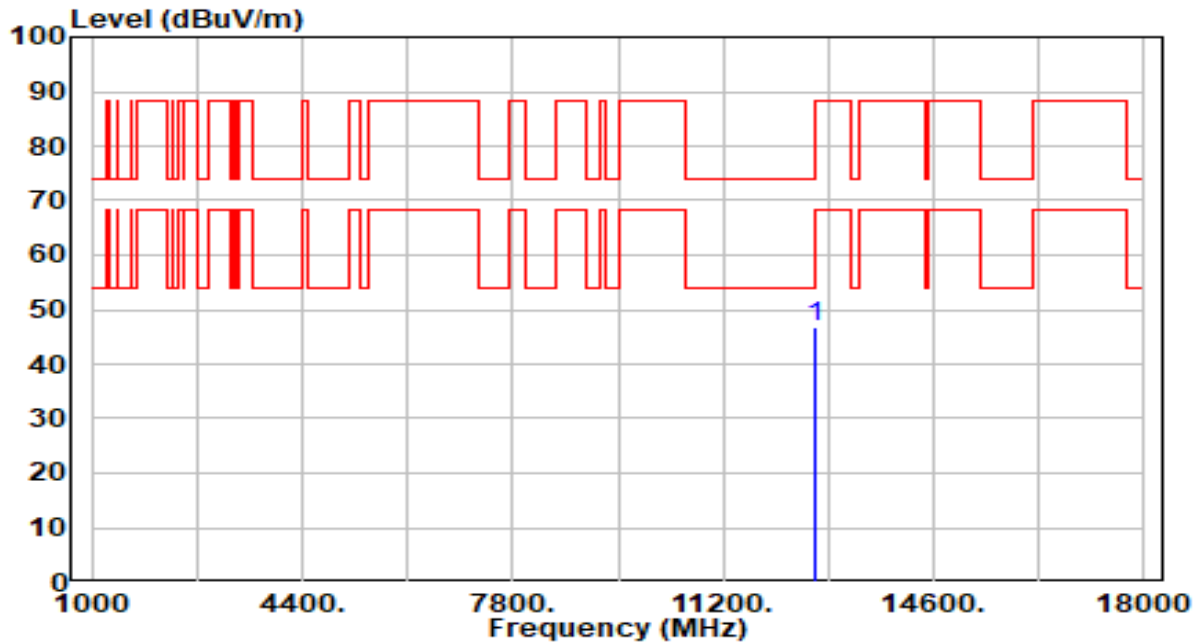


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12690.000     | 41.52          | 5.23       | 46.75                | -27.25      | 74.00          | 100         | 139         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band5_CH 79_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

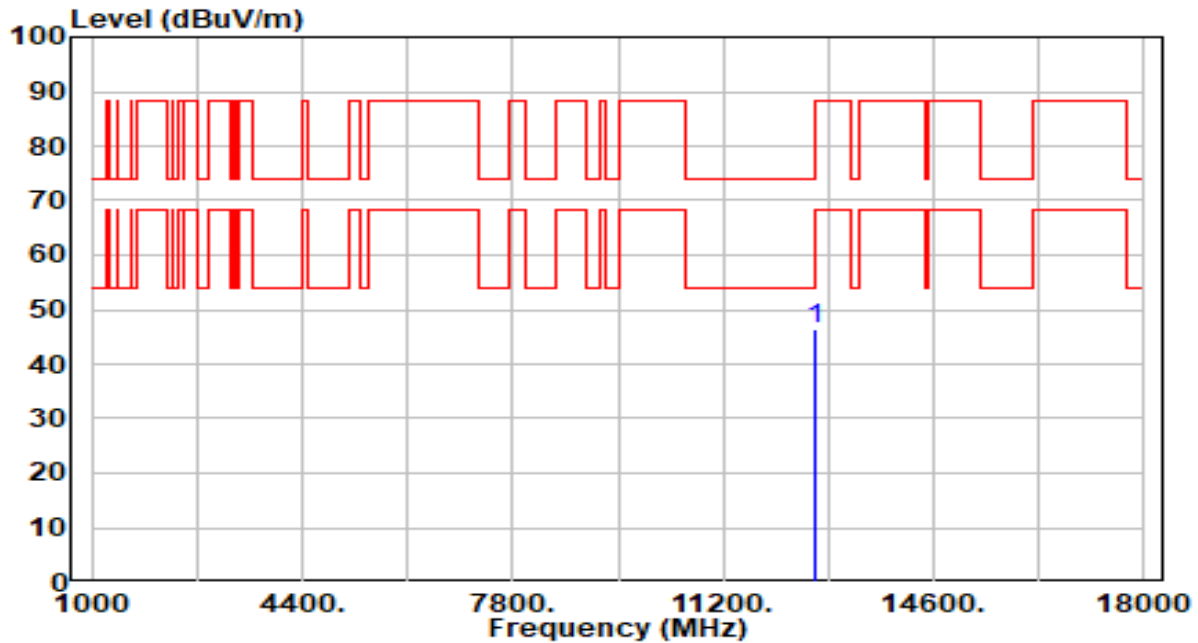


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12690.000     | 41.16          | 5.23       | 46.39                | -27.61      | 74.00          | 100         | 282         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band6_CH 111_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

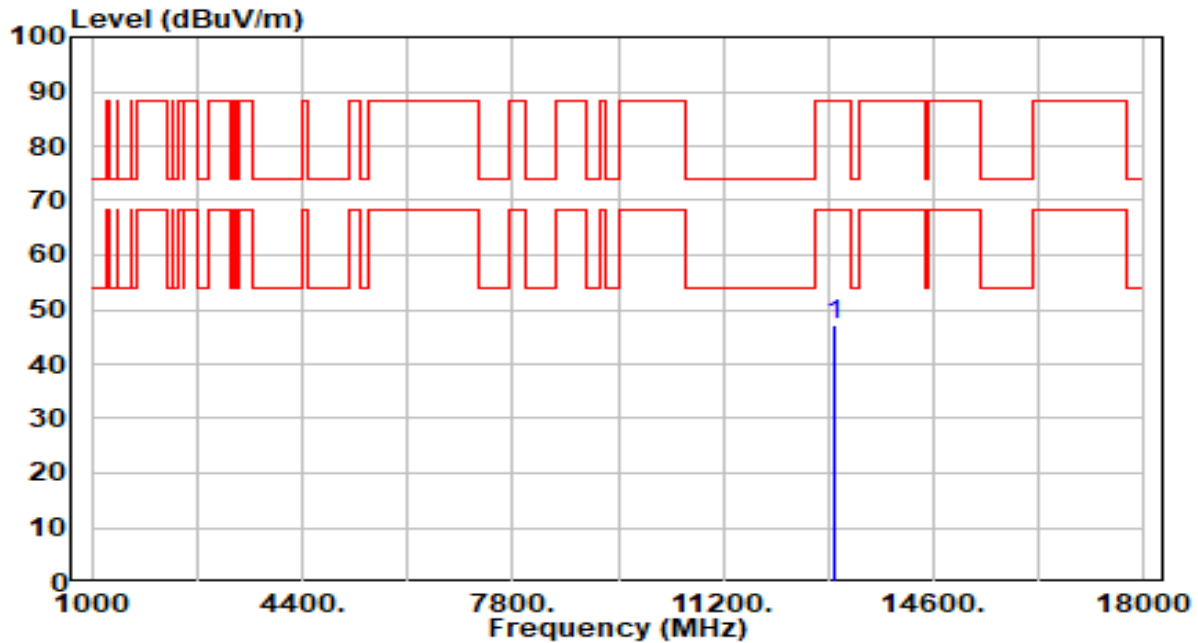


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13010.000     | 41.99          | 5.24       | 47.22                | -40.98      | 88.20          | 100         | 119         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band6_CH 111_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

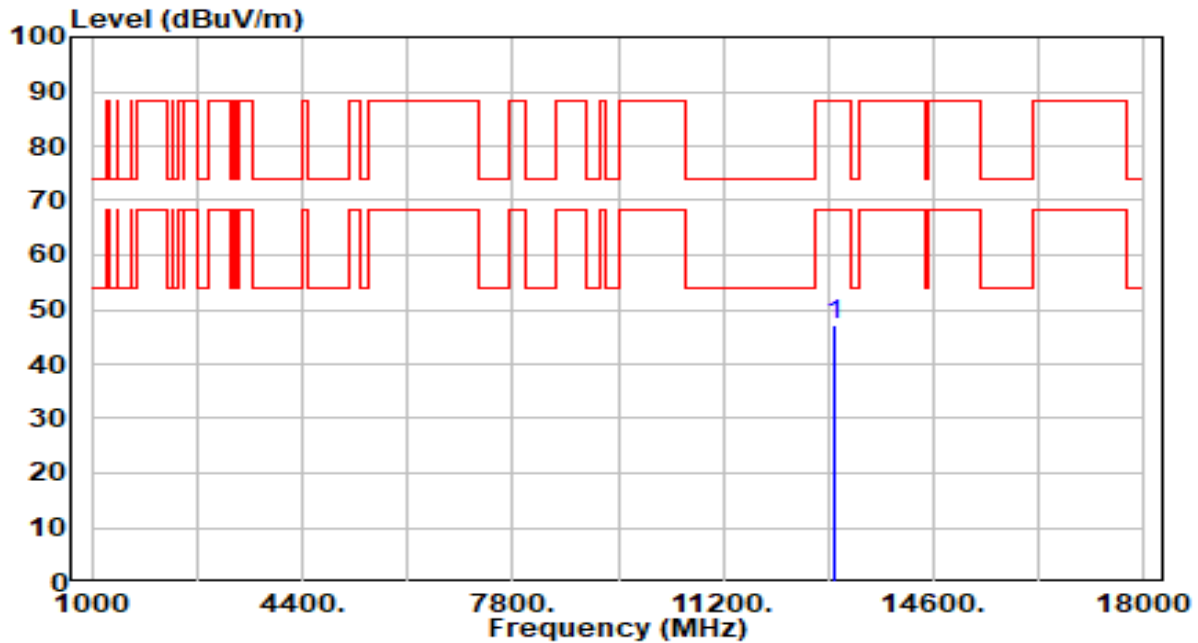


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13010.000     | 41.93          | 5.24       | 47.17                | -41.03      | 88.20          | 100         | 35          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band7_CH 143_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

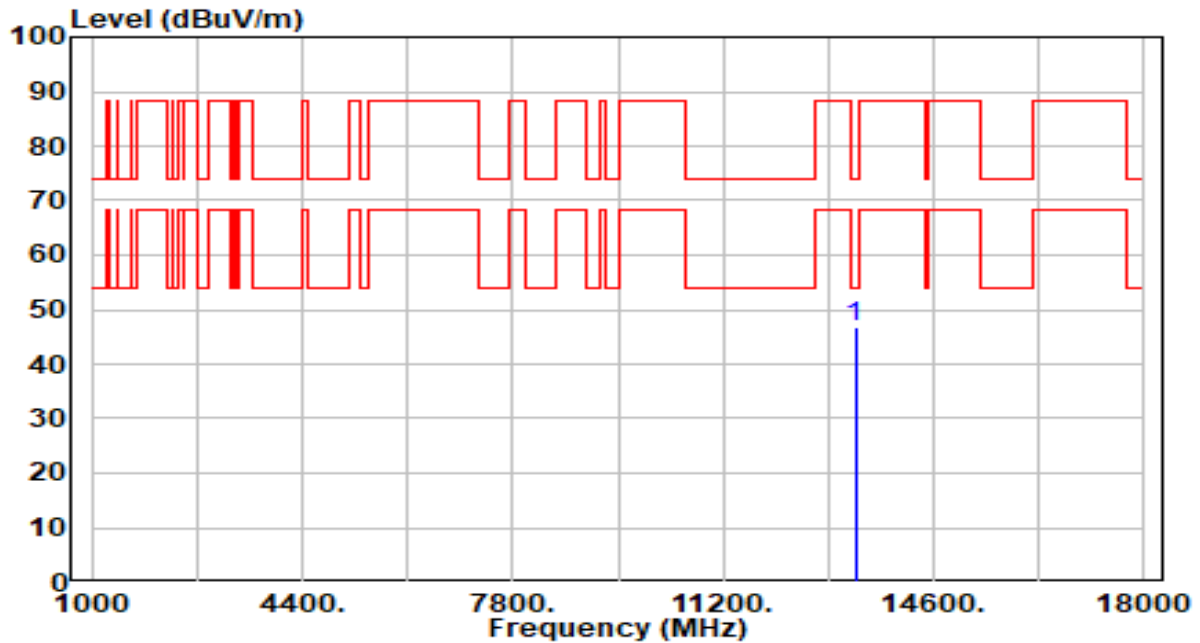


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13330.000     | 41.70          | 5.24       | 46.94                | -27.06      | 74.00          | 100         | 300         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band7_CH 143_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

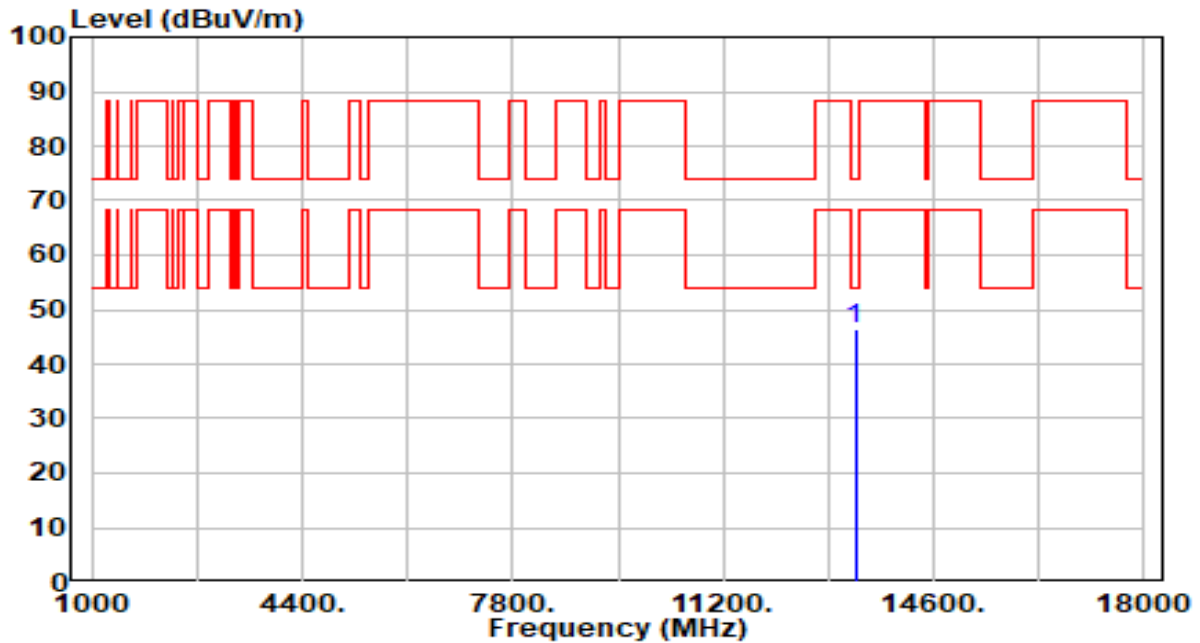


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13330.000     | 41.19          | 5.24       | 46.43                | -27.57      | 74.00          | 100         | 131         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band7_CH 175_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

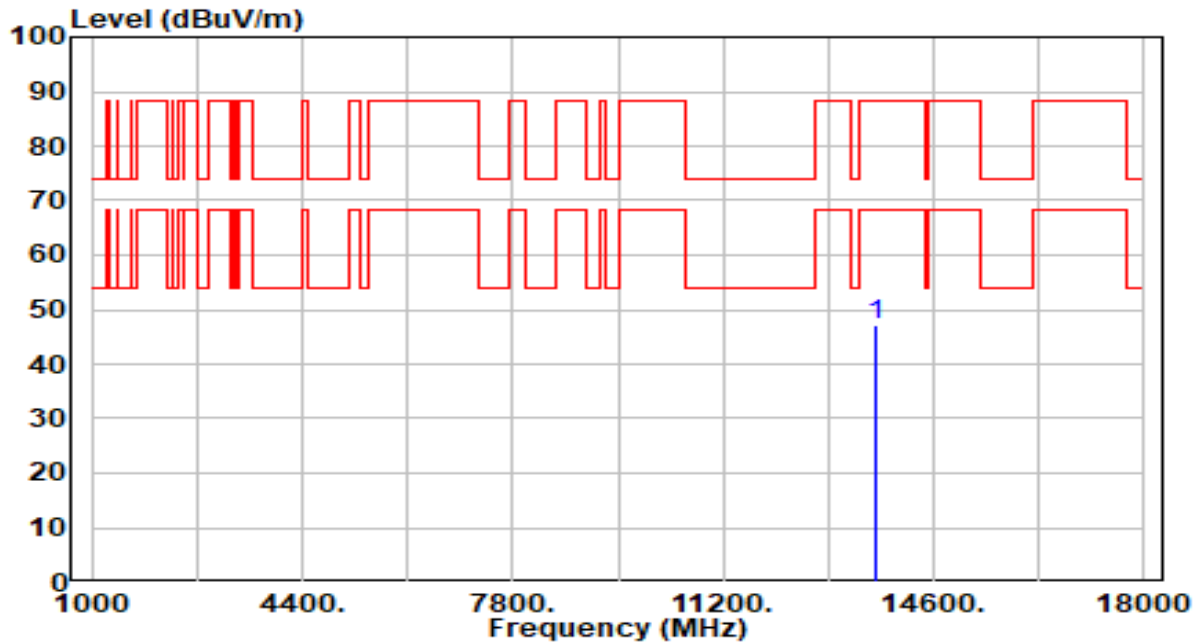


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13650.000     | 42.22          | 5.01       | 47.24                | -40.96      | 88.20          | 100         | 330         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band7_CH 175_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

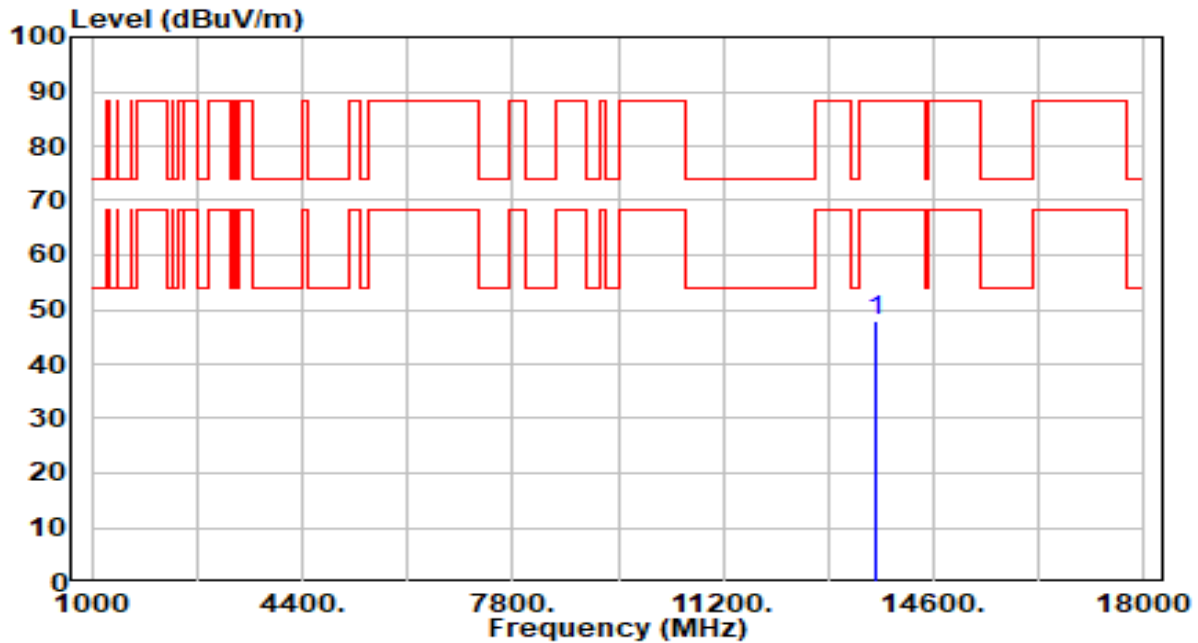


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13650.000     | 42.99          | 5.01       | 48.00                | -40.20      | 88.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

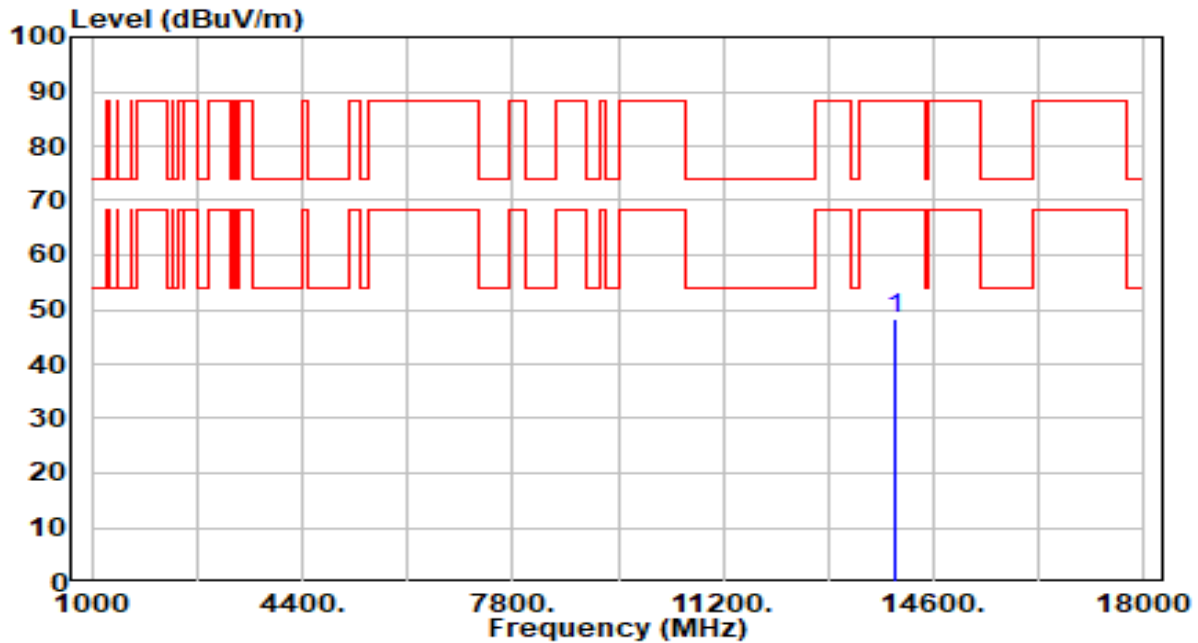


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13970.000     | 43.00          | 5.15       | 48.15                | -40.05      | 88.20          | 100         | 247         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

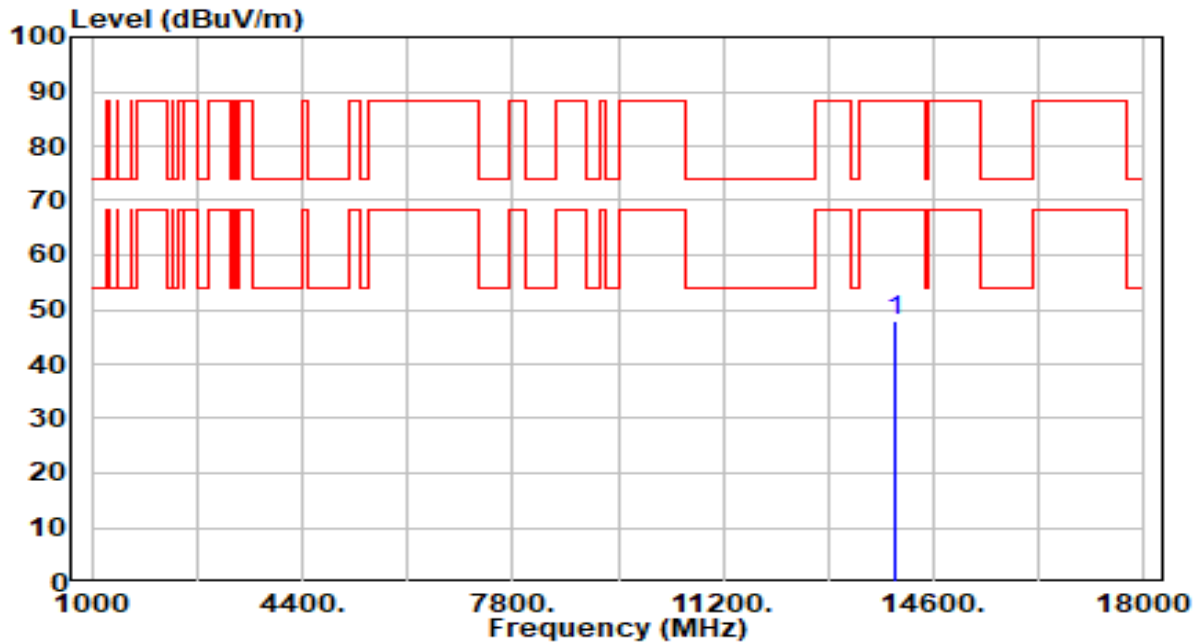


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13970.000     | 42.69          | 5.15       | 47.84                | -40.36      | 88.20          | 100         | 268         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band5_CH 31_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

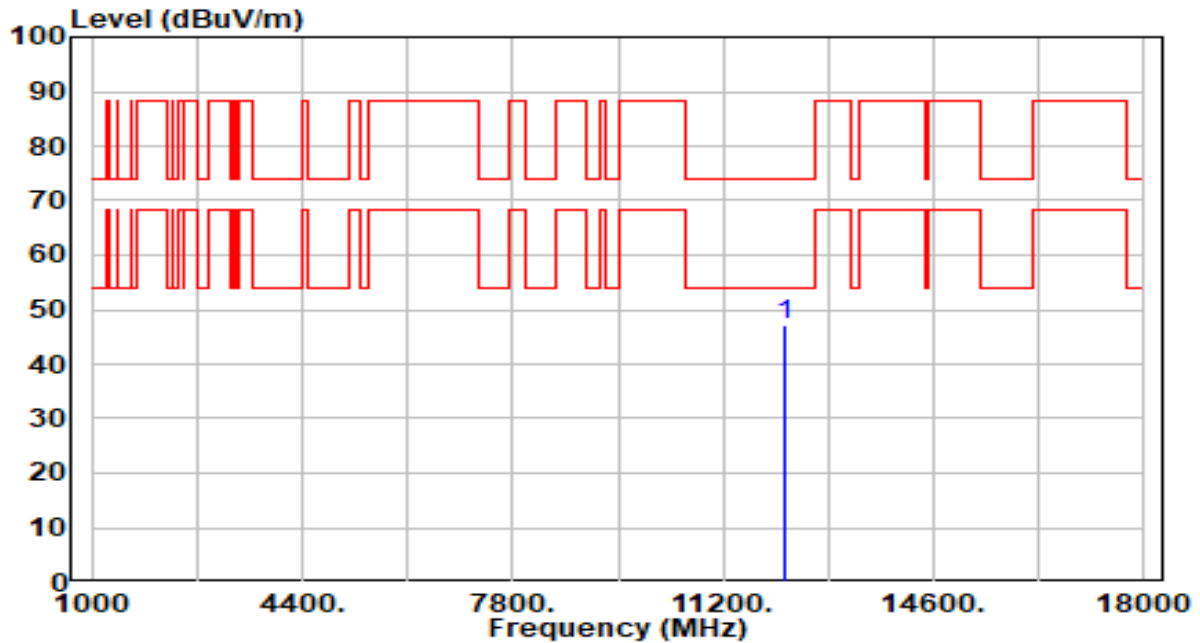


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12210.000     | 42.95          | 4.31       | 47.25                | -26.75      | 74.00          | 100         | 197         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band5_CH 31_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

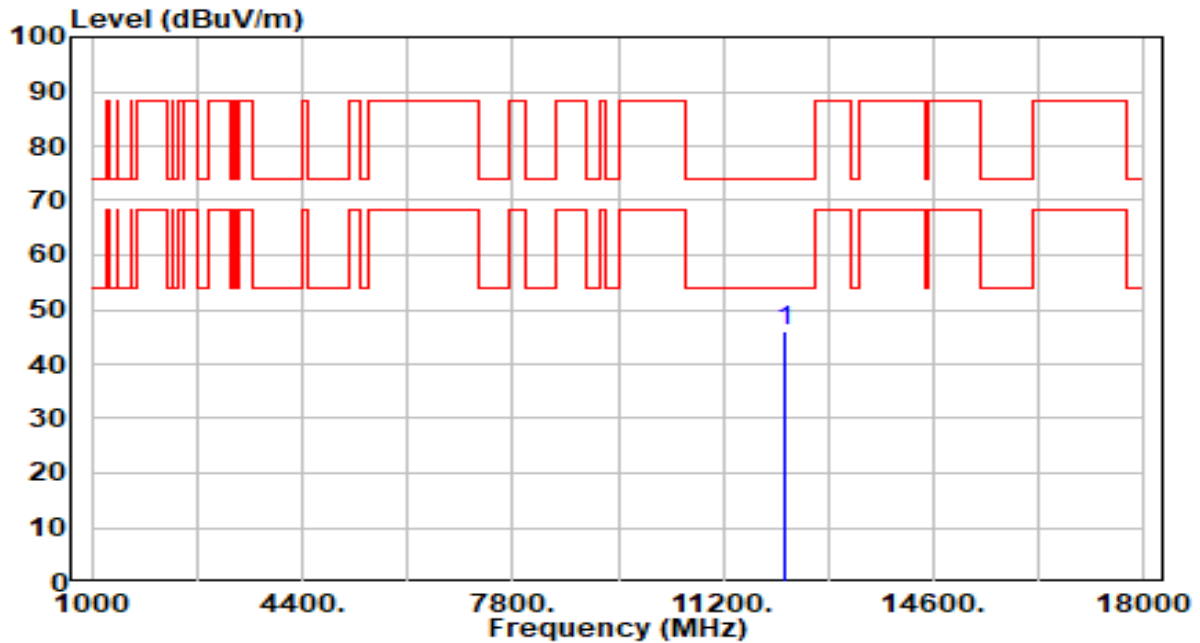


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 12210.000       | 41.76          | 4.31       | 46.07                | -27.93      | 74.00          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band5_CH 63_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

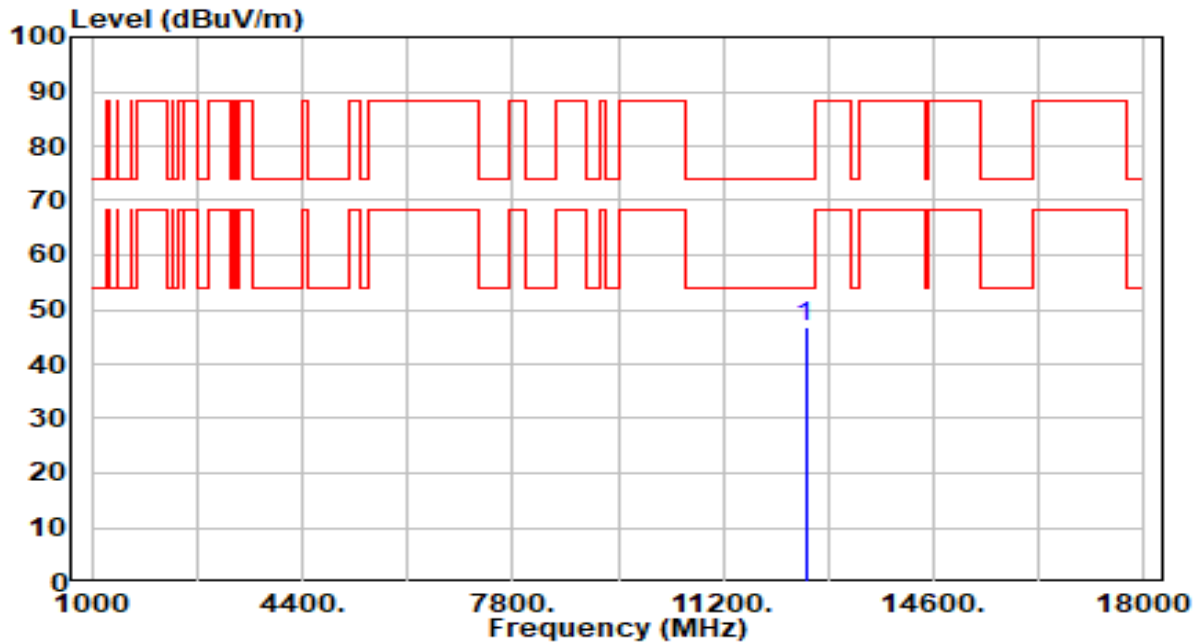


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12530.000     | 41.69          | 4.98       | 46.67                | -27.33      | 74.00          | 100         | 173         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band5_CH 63_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

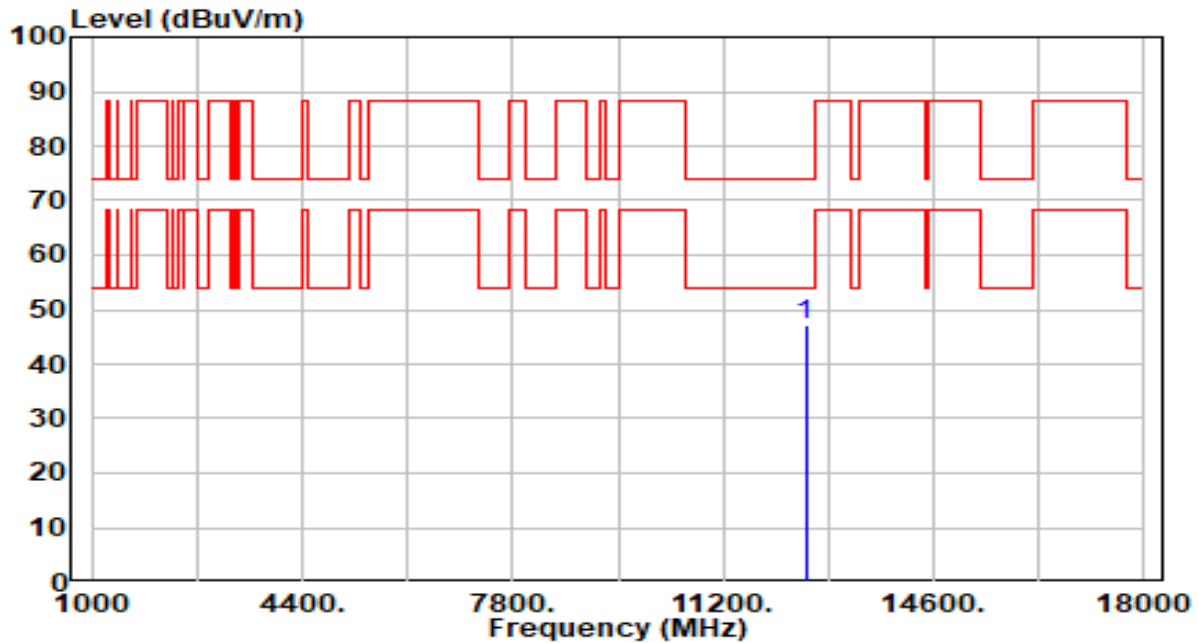


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12530.000     | 42.15          | 4.98       | 47.13                | -26.87      | 74.00          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                 |                      |              |
|-----------|-------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router                | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                         | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band5&6_CH<br>95_ANT 0+1+2+3 | Test Voltage         | AC 120V/60Hz |

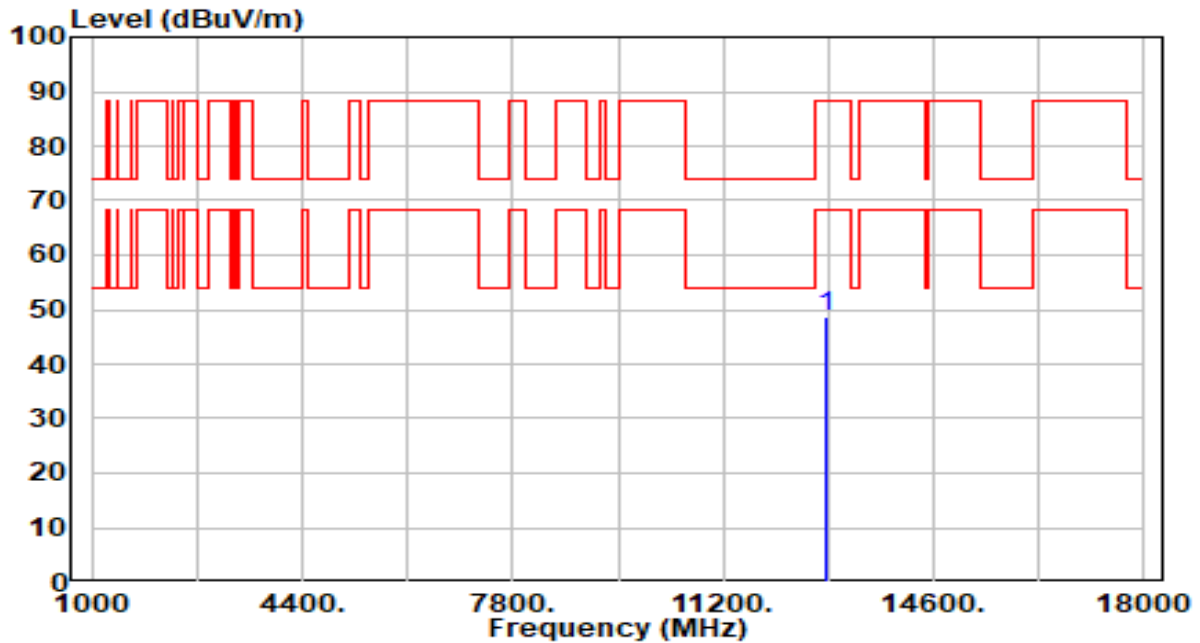


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12850.000     | 43.32          | 5.29       | 48.61                | -39.59      | 88.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                 |                      |              |
|-----------|-------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router                | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                         | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                        | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band5&6_CH<br>95_ANT 0+1+2+3 | Test Voltage         | AC 120V/60Hz |

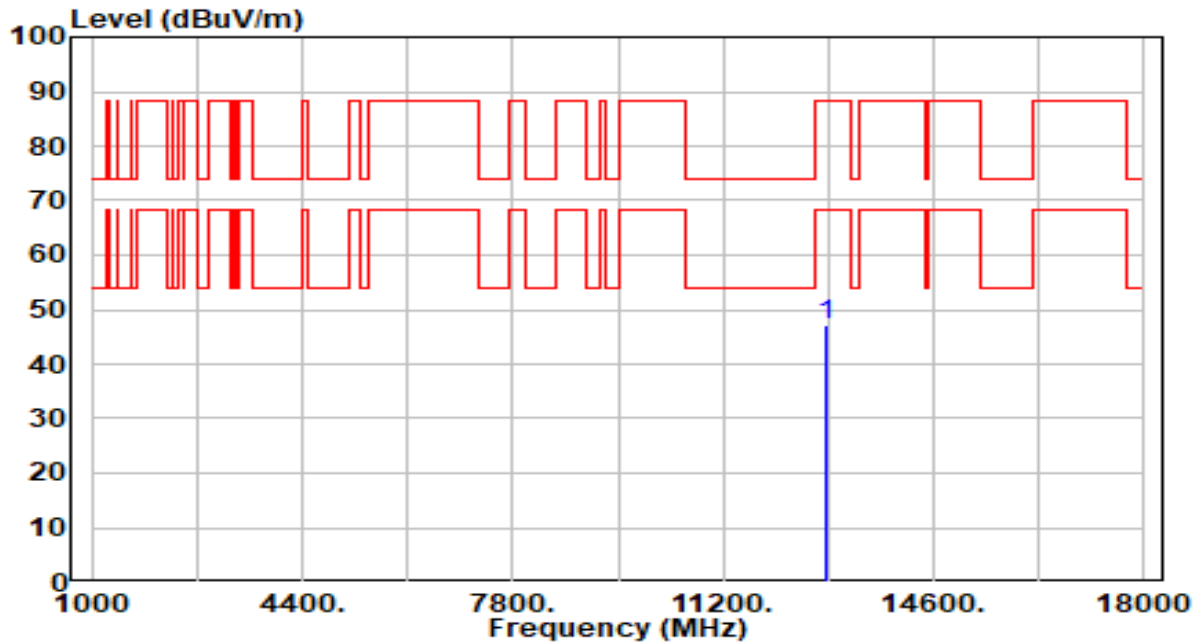


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12850.000     | 41.95          | 5.29       | 47.24                | -40.96      | 88.20          | 100         | 256         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band7_CH 127_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

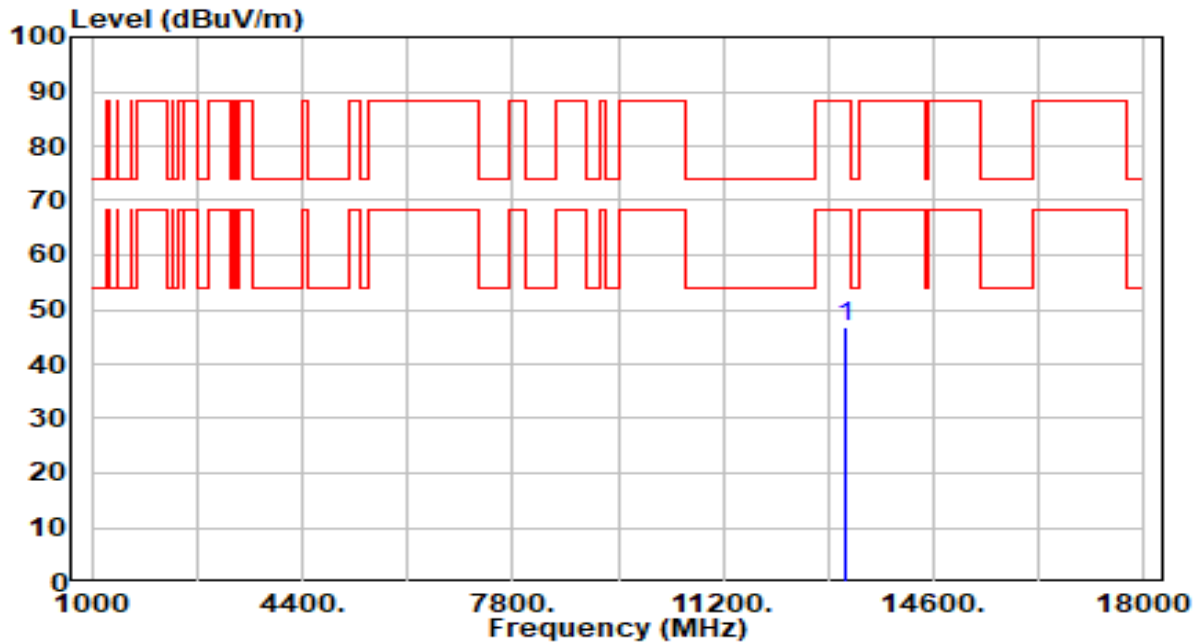


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13170.000     | 41.76          | 5.21       | 46.96                | -41.24      | 88.20          | 100         | 8           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band7_CH 127_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

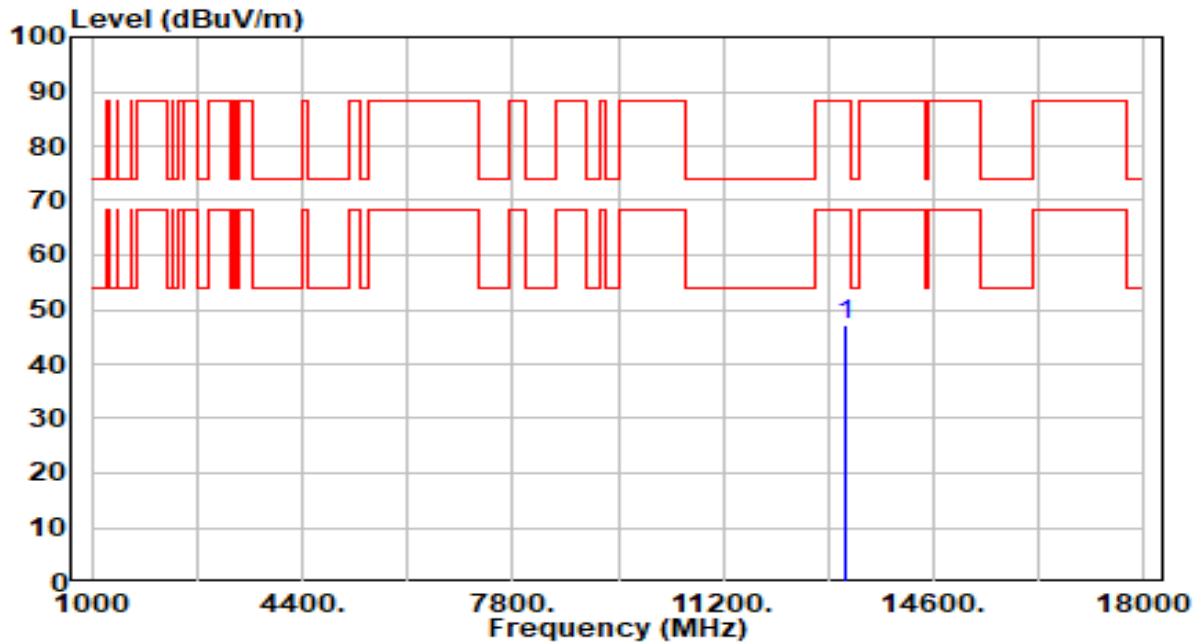


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13170.000     | 42.02          | 5.21       | 47.22                | -40.98      | 88.20          | 100         | 112         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band7_CH 159_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

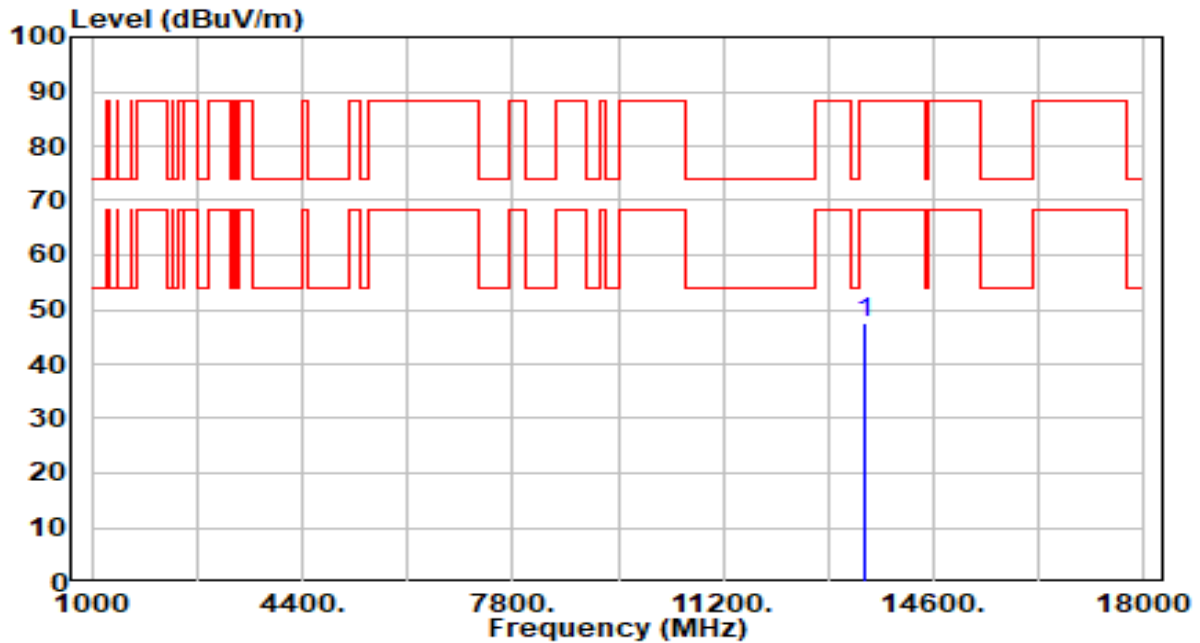


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13490.000     | 42.27          | 5.20       | 47.47                | -40.73      | 88.20          | 100         | 256         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band7_CH 159_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

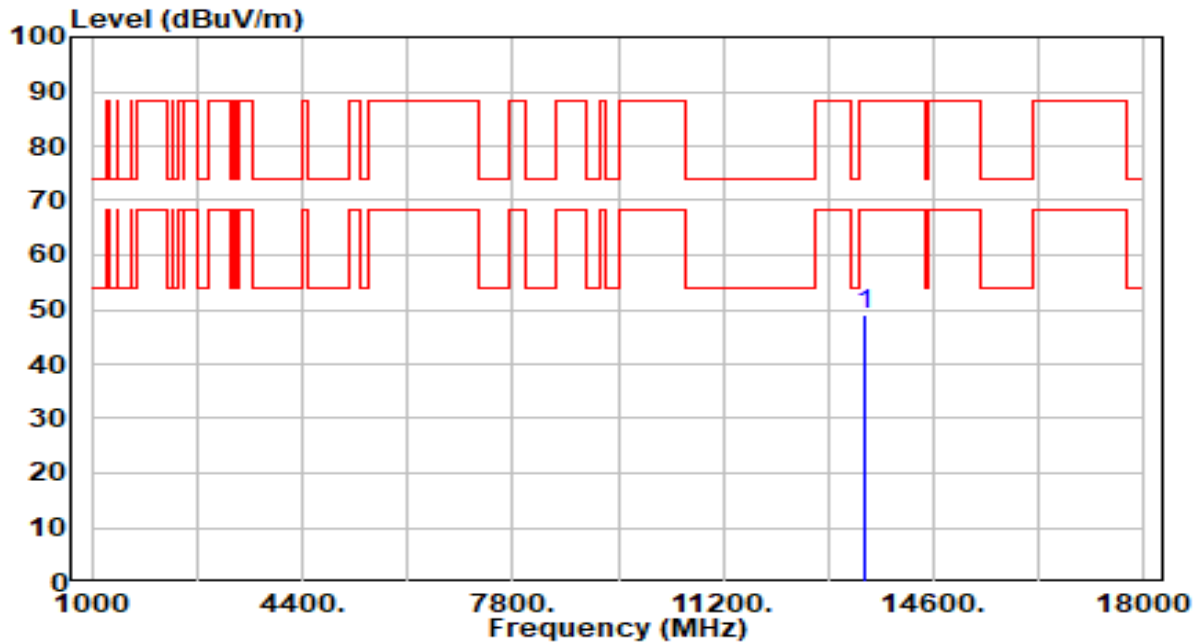


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13490.000     | 43.77          | 5.20       | 48.97                | -39.23      | 88.20          | 100         | 326         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band8_CH 191_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

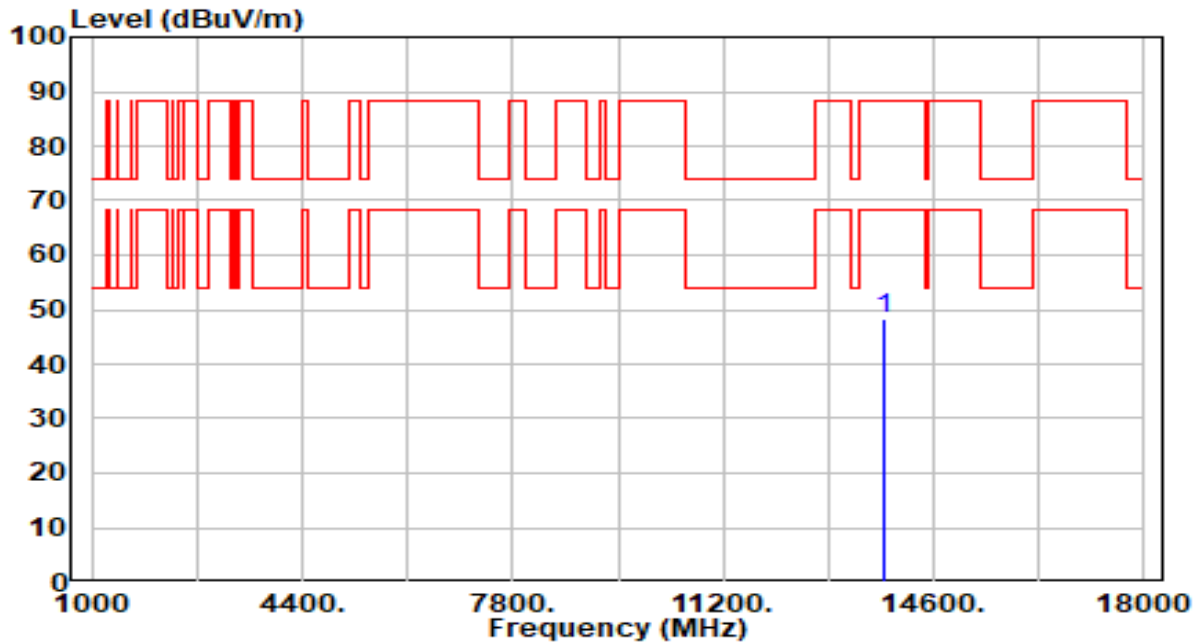


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13810.000     | 43.22          | 5.04       | 48.26                | -39.94      | 88.20          | 100         | 95          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band8_CH 191_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

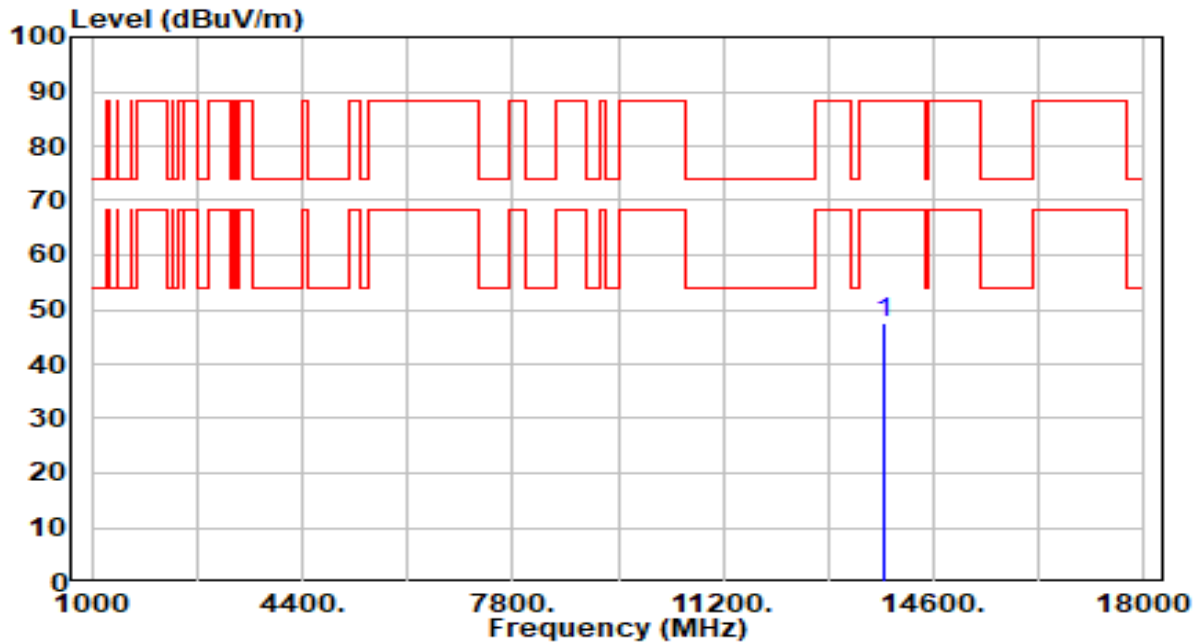


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13810.000     | 42.43          | 5.04       | 47.48                | -40.72      | 88.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-07   |
| Factor    | BBHA 9170                                   | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_Band5_TX_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

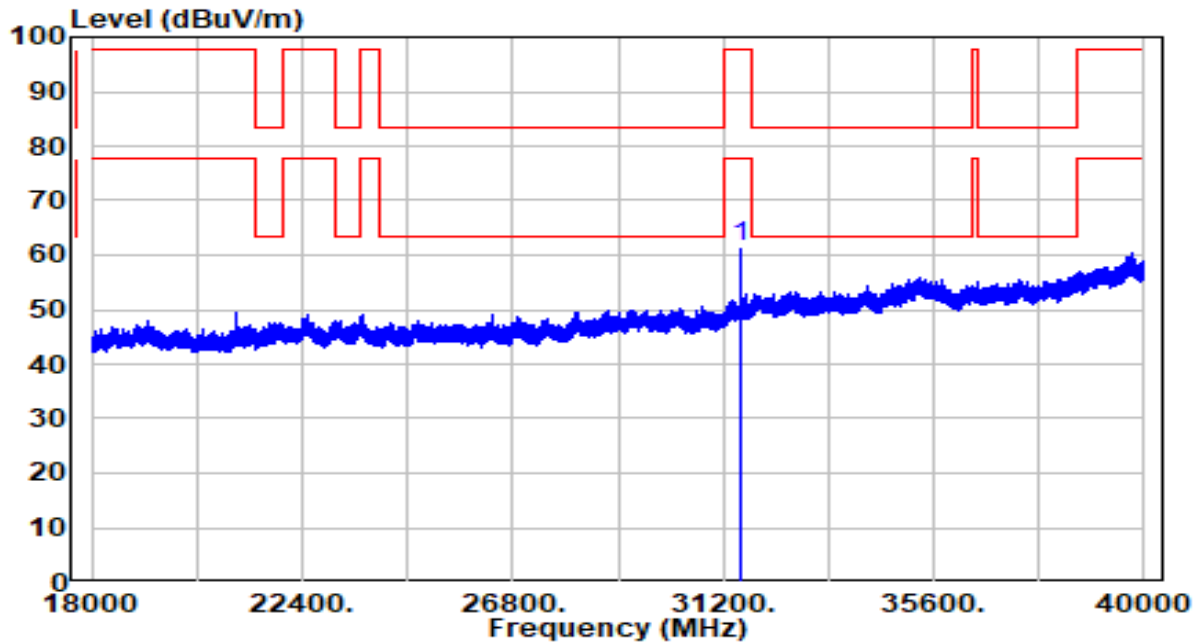


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 31568.500     | 43.38          | 18.01      | 61.39                | -36.35      | 97.74          | 150         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-07   |
| Factor    | BBHA 9170                                   | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_Band5_TX_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

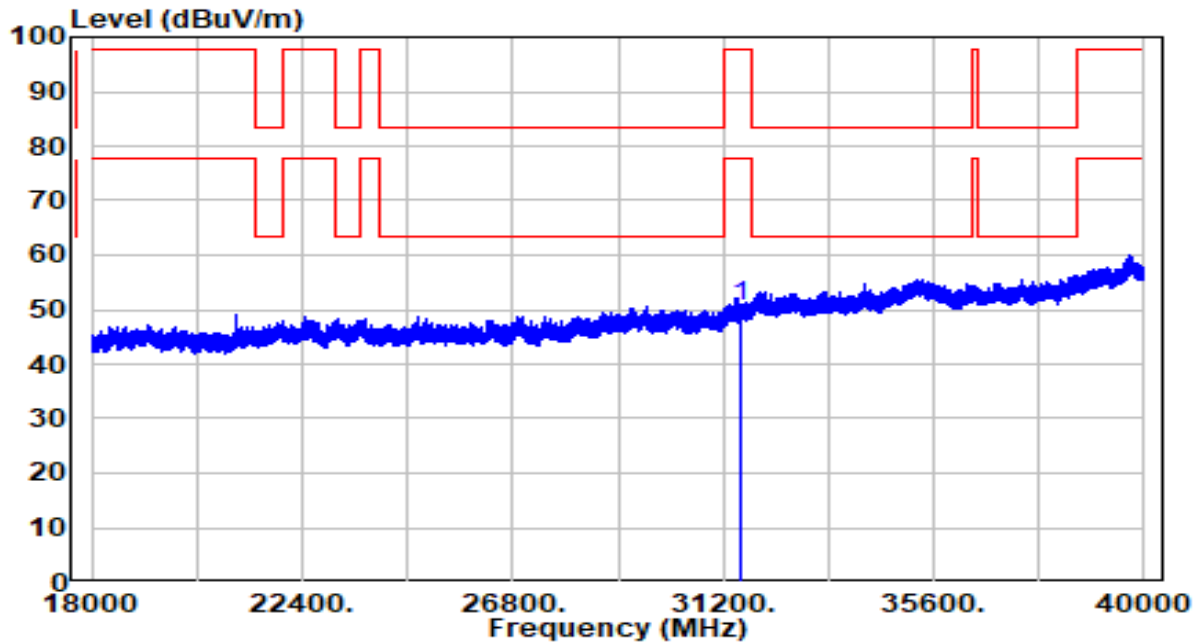

| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 31568.500       | 32.65          | 18.01      | 50.66                | -47.08      | 97.74          | 150         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 6.9. Radiated Restricted Band Edge

### 6.9.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)    | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|-----------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                    | --                 | --                 |

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v01 clause G - Unwanted Emission Measurement

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

### 6.9.2. Test Procedure Used

KDB 789033 D02v02r01- Section II)G

### 6.9.3. Test Setting

#### Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

#### Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10Hz
4. If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration
5. Detector = Peak


6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

#### 6.9.4. Test Setup

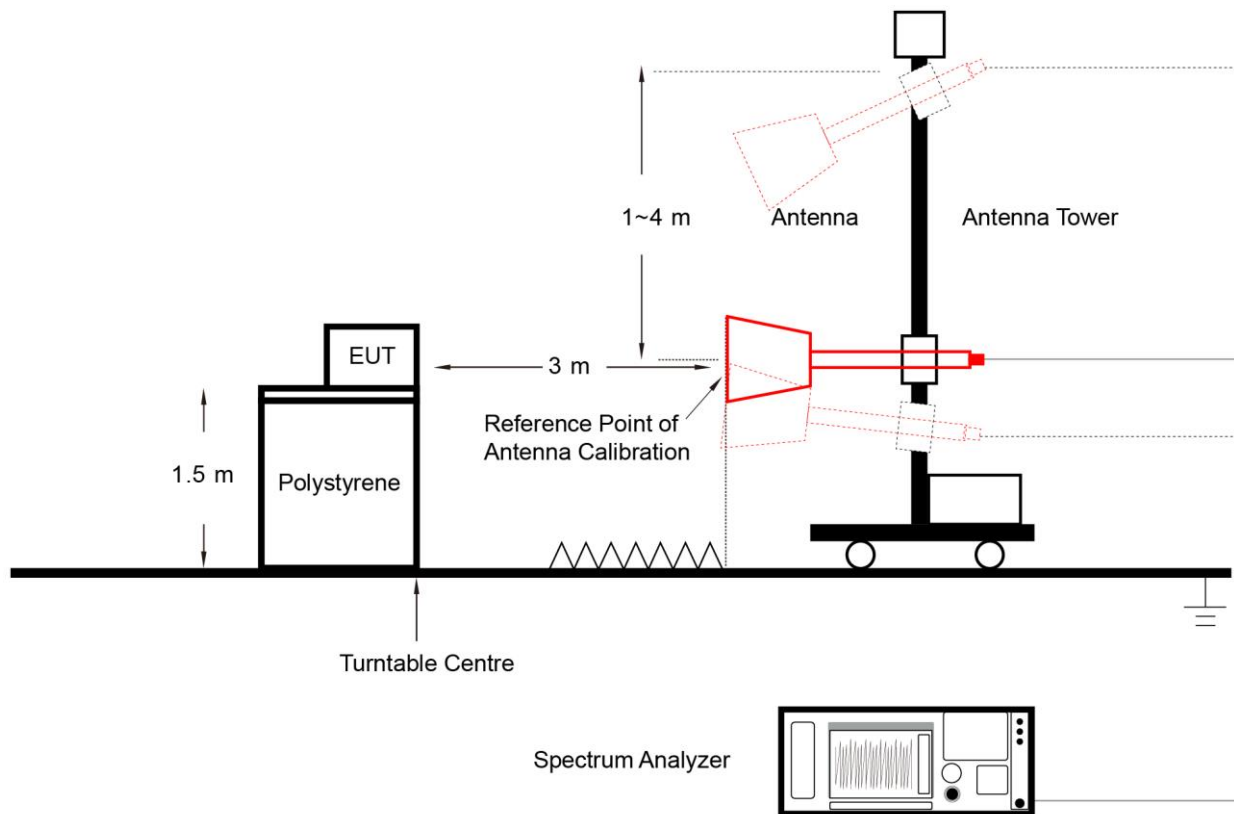

### 6.9.5. Test Result

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

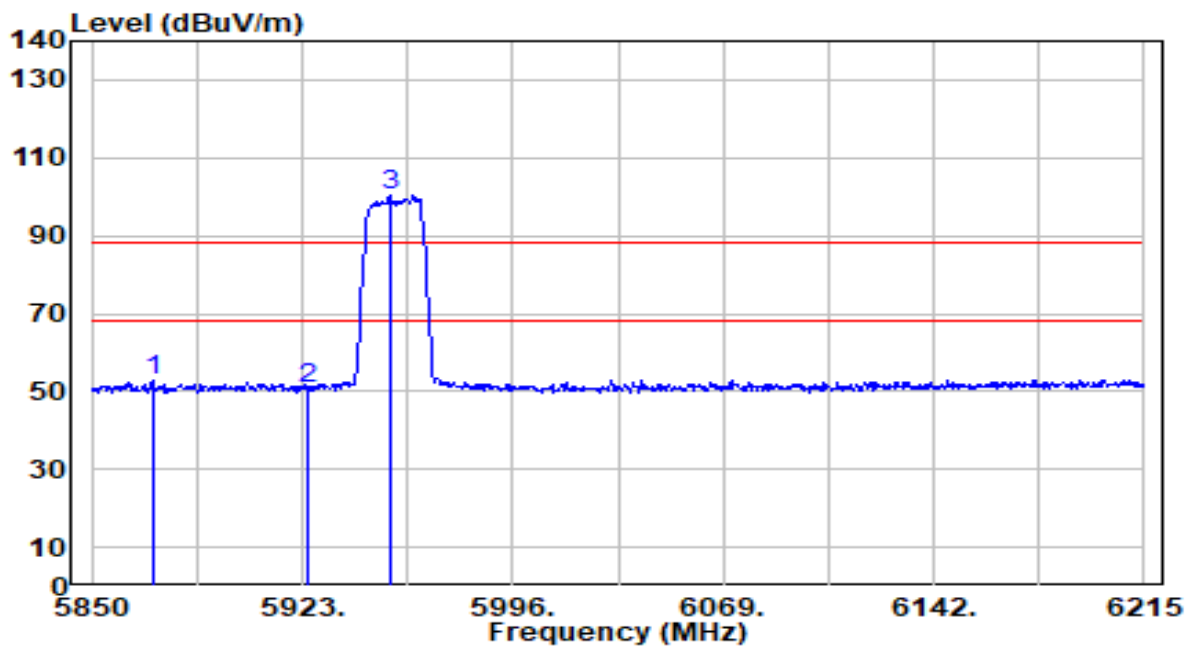


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5871.170      | 52.21          | 0.57       | 52.78                | -35.42      | 88.20          | 200         | 132         | Peak              |
| 2  | 5925.000        | 50.15          | 0.53       | 50.68                | -37.52      | 88.20          | 200         | 132         | Peak              |
| 3  | 5953.295        | 99.95          | 0.51       | 100.46               | N/A         | N/A            | 200         | 132         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

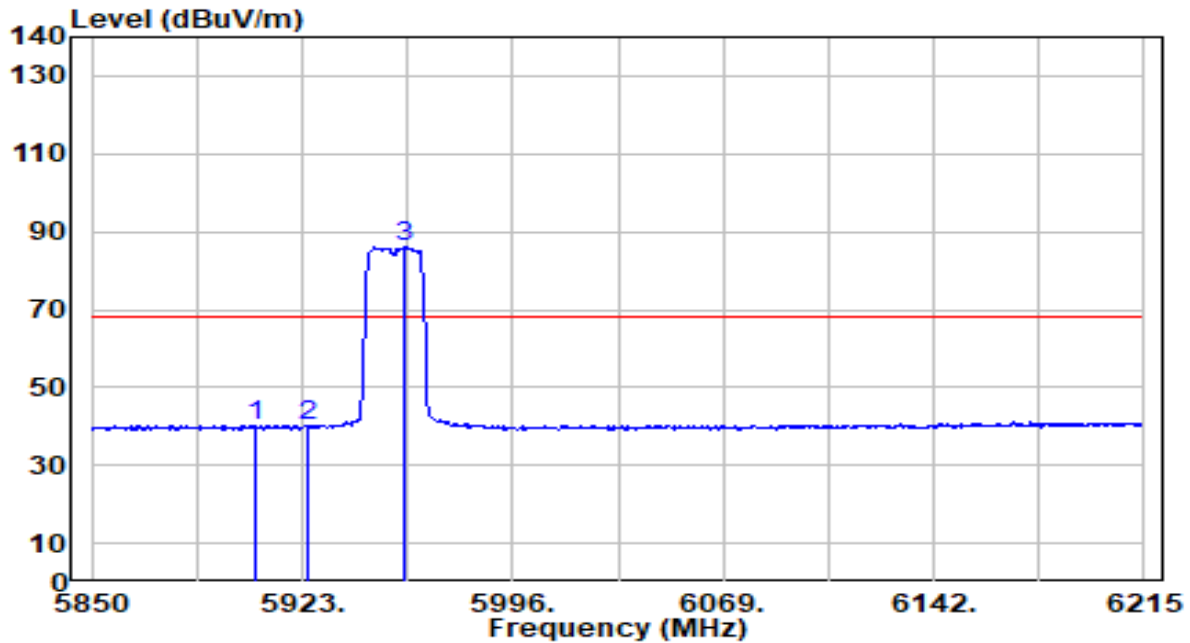


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5906.940        | 39.67          | 0.54       | 40.21                | -27.99      | 68.20          | 200         | 132         | Average           |
| 2  |   | 5925.000        | 39.52          | 0.53       | 40.05                | -28.15      | 68.20          | 200         | 132         | Average           |
| 3  |   | 5958.405        | 85.64          | 0.50       | 86.14                | N/A         | N/A            | 200         | 132         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

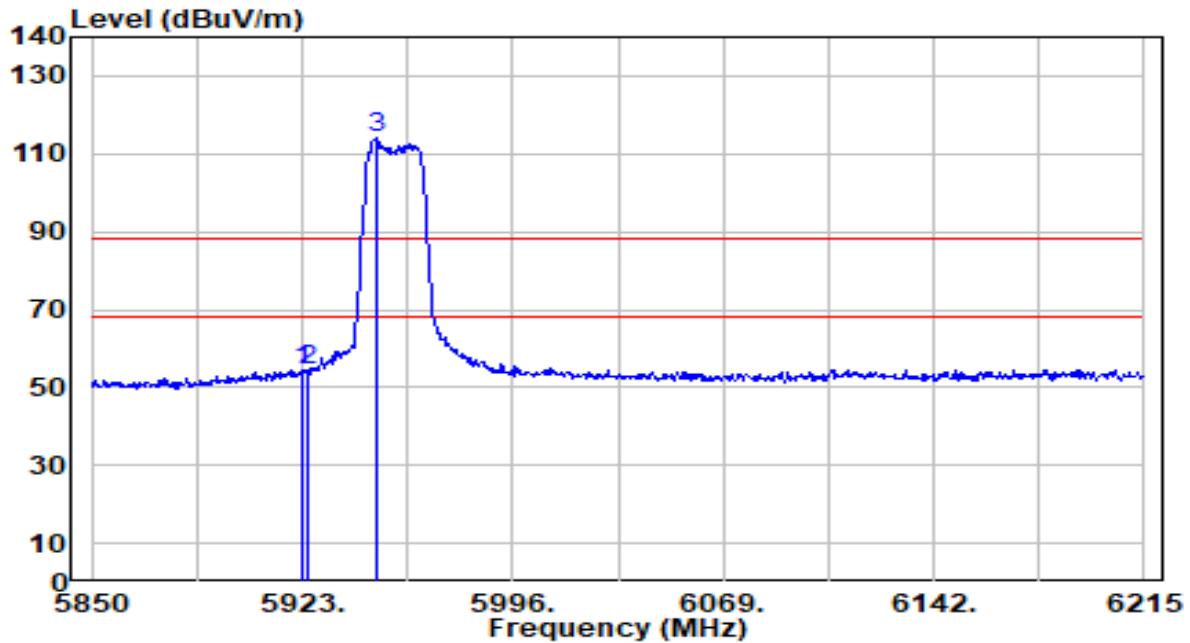


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5923.000        | 54.03          | 0.53       | 54.56                | -33.64      | 88.20          | 200         | 70          | Peak              |
| 2  |   | 5925.000        | 53.94          | 0.53       | 54.46                | -33.74      | 88.20          | 200         | 70          | Peak              |
| 3  |   | 5948.915        | 113.54         | 0.51       | 114.05               | N/A         | N/A            | 200         | 70          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

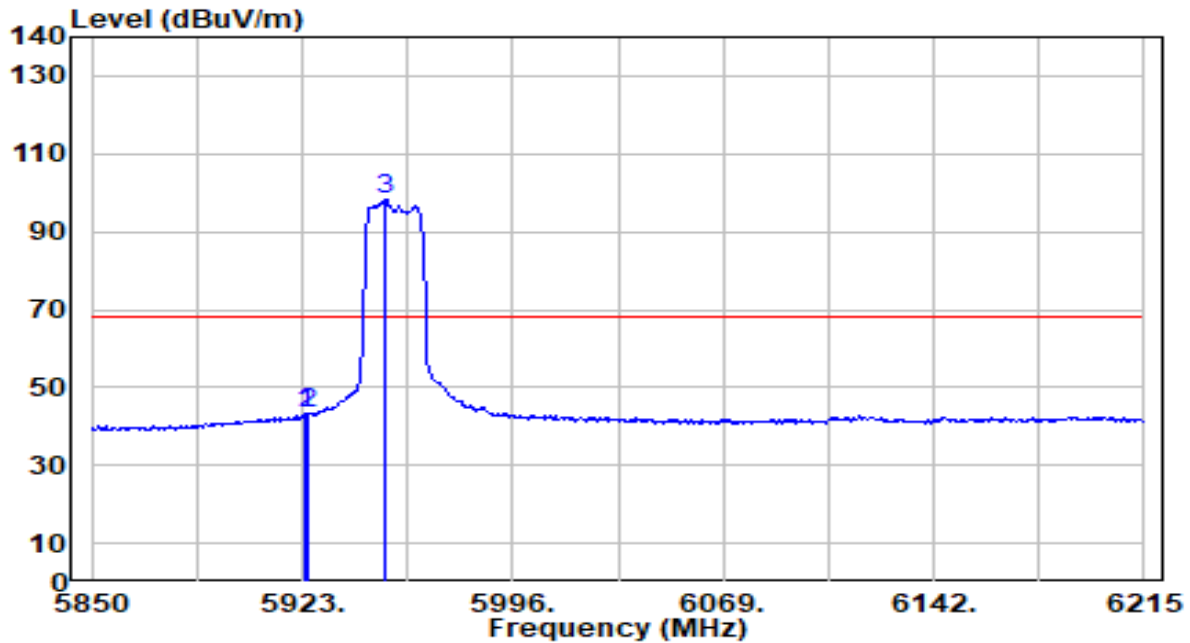


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5923.730        | 42.86          | 0.53       | 43.39                | -24.81      | 68.20          | 200         | 70          | Average           |
| 2  |   | 5925.000        | 42.64          | 0.53       | 43.17                | -25.03      | 68.20          | 200         | 70          | Average           |
| 3  |   | 5951.835        | 97.67          | 0.51       | 98.18                | N/A         | N/A            | 200         | 70          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

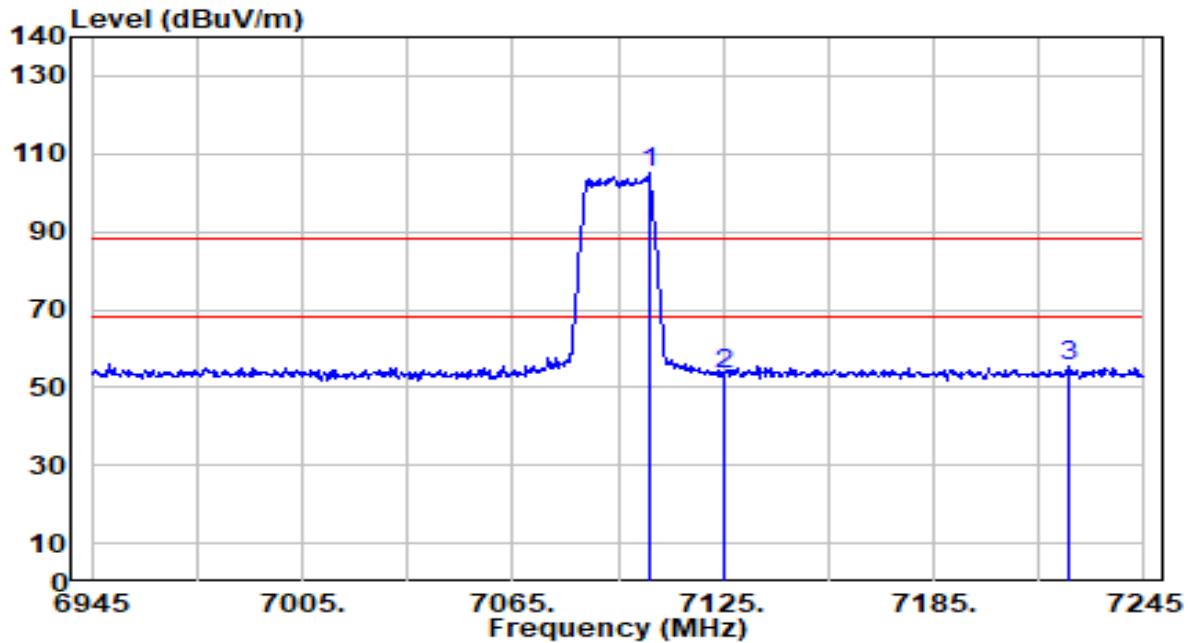


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7104.000        | 101.37         | 3.87       | 105.24               | N/A         | N/A            | 300         | 167         | Peak              |
| 2  | 7125.000        | 49.71          | 3.88       | 53.58                | -34.62      | 88.20          | 300         | 167         | Peak              |
| 3  | * 7223.400      | 51.51          | 3.90       | 55.41                | -32.79      | 88.20          | 300         | 167         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

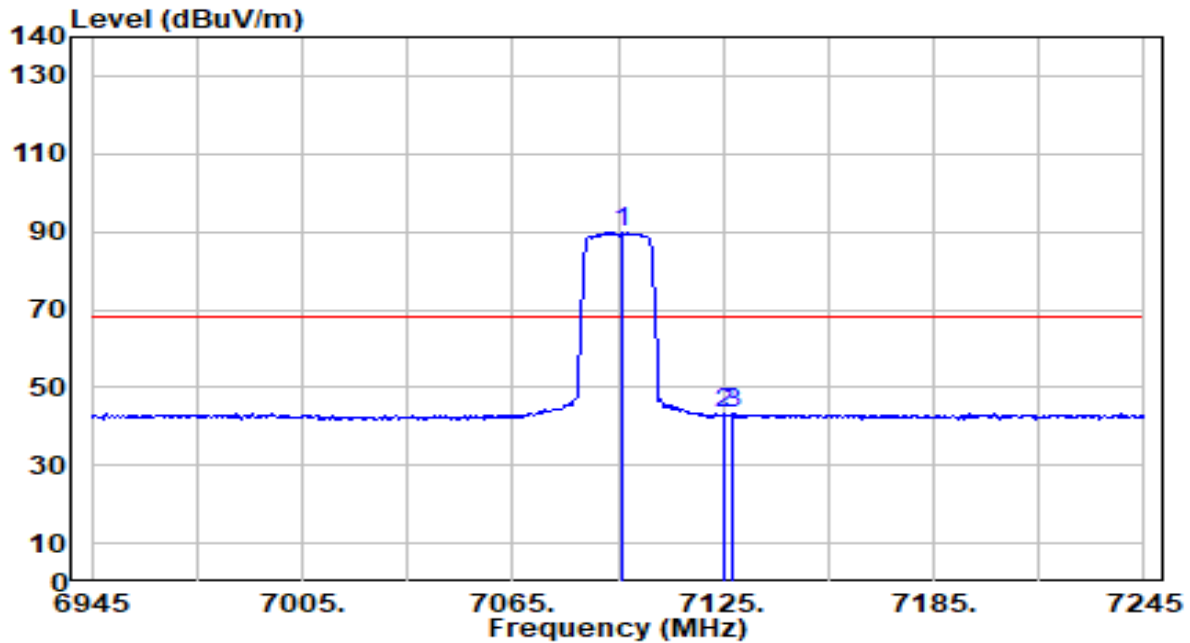


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7096.200        | 86.06          | 3.87       | 89.93                | N/A         | N/A            | 300         | 167         | Average           |
| 2  | 7125.000        | 39.22          | 3.88       | 43.09                | -25.11      | 68.20          | 300         | 167         | Average           |
| 3  | * 7127.700      | 39.38          | 3.88       | 43.26                | -24.94      | 68.20          | 300         | 167         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

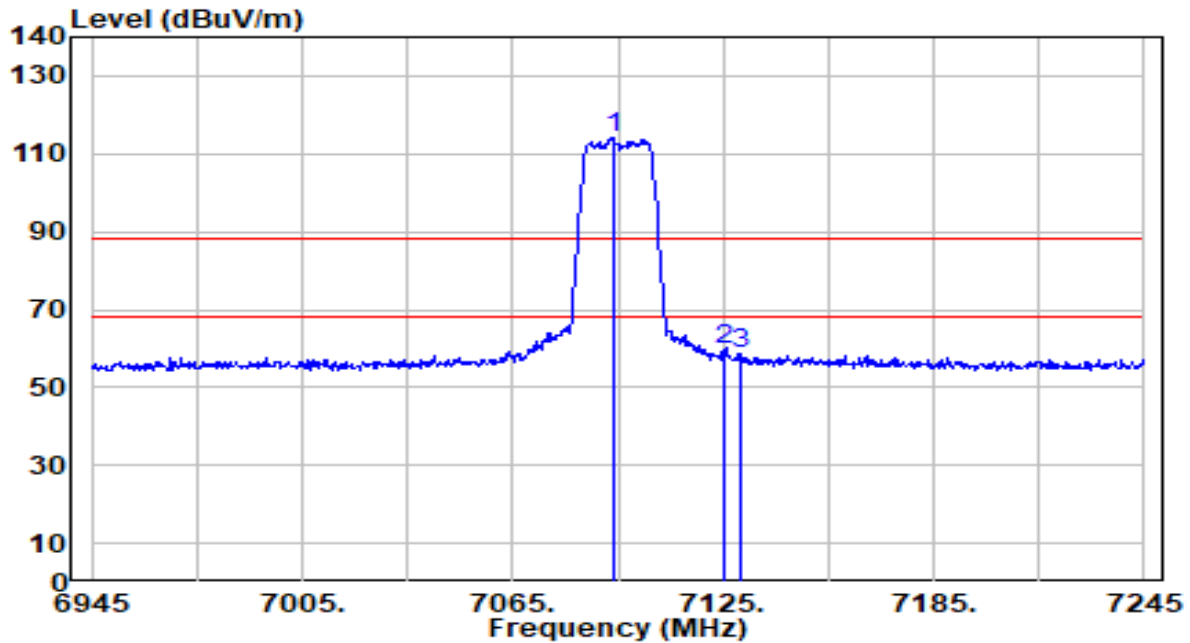


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7093.500        | 110.31         | 3.87       | 114.18               | N/A         | N/A            | 208         | 14          | Peak              |
| 2  | * 7125.000      | 55.60          | 3.88       | 59.47                | -28.73      | 88.20          | 208         | 14          | Peak              |
| 3  | 7130.100        | 54.93          | 3.88       | 58.81                | -29.39      | 88.20          | 208         | 14          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

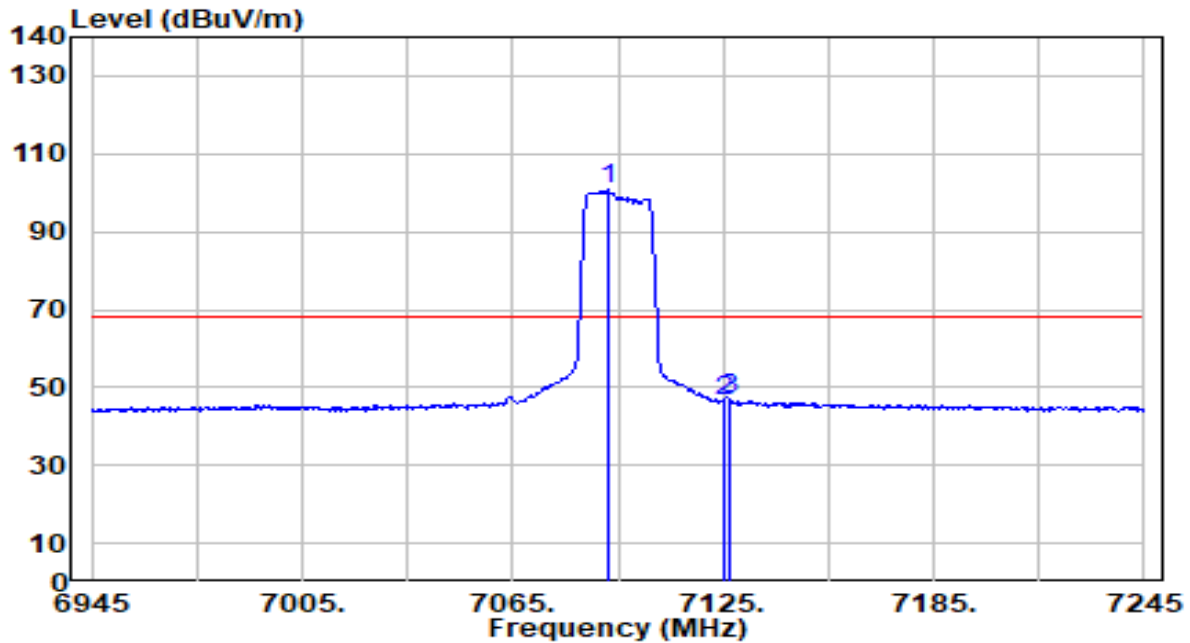


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7092.300        | 96.80          | 3.87       | 100.67               | N/A         | N/A            | 208         | 14          | Average           |
| 2  | 7125.000        | 42.70          | 3.88       | 46.58                | -21.62      | 68.20          | 208         | 14          | Average           |
| 3  | * 7126.800      | 42.99          | 3.88       | 46.87                | -21.33      | 68.20          | 208         | 14          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 3_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

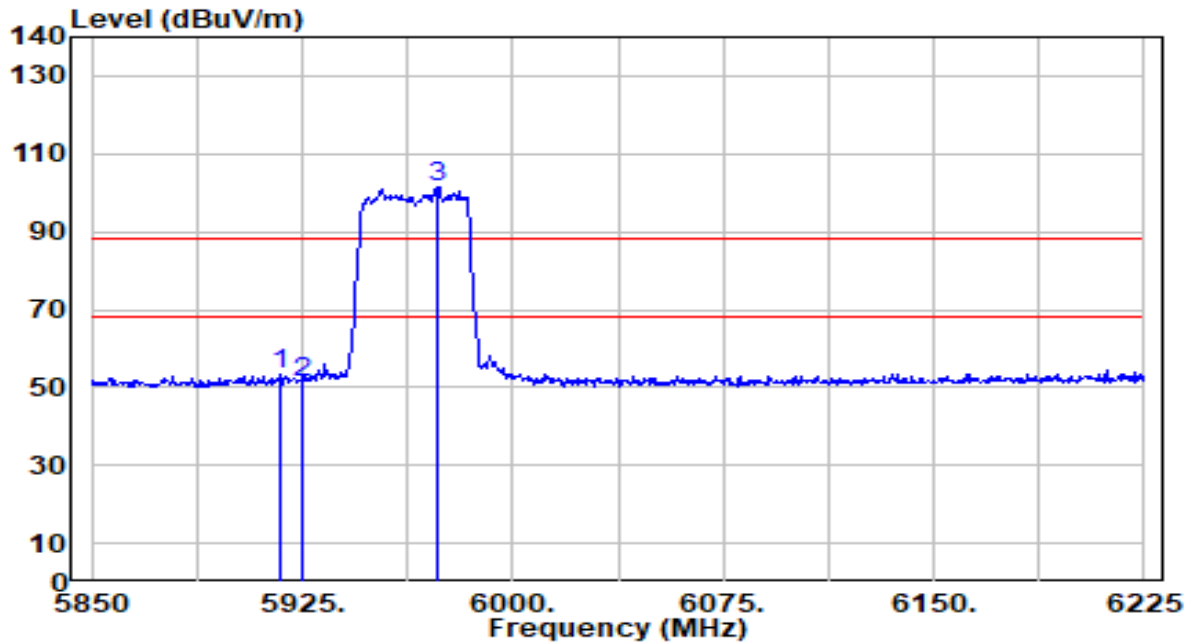


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5917.125        | 52.67          | 0.53       | 53.20                | -35.00      | 88.20          | 200         | 132         | Peak              |
| 2  |   | 5925.000        | 50.50          | 0.53       | 51.03                | -37.17      | 88.20          | 200         | 132         | Peak              |
| 3  |   | 5973.375        | 101.01         | 0.49       | 101.50               | N/A         | N/A            | 200         | 132         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 3_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

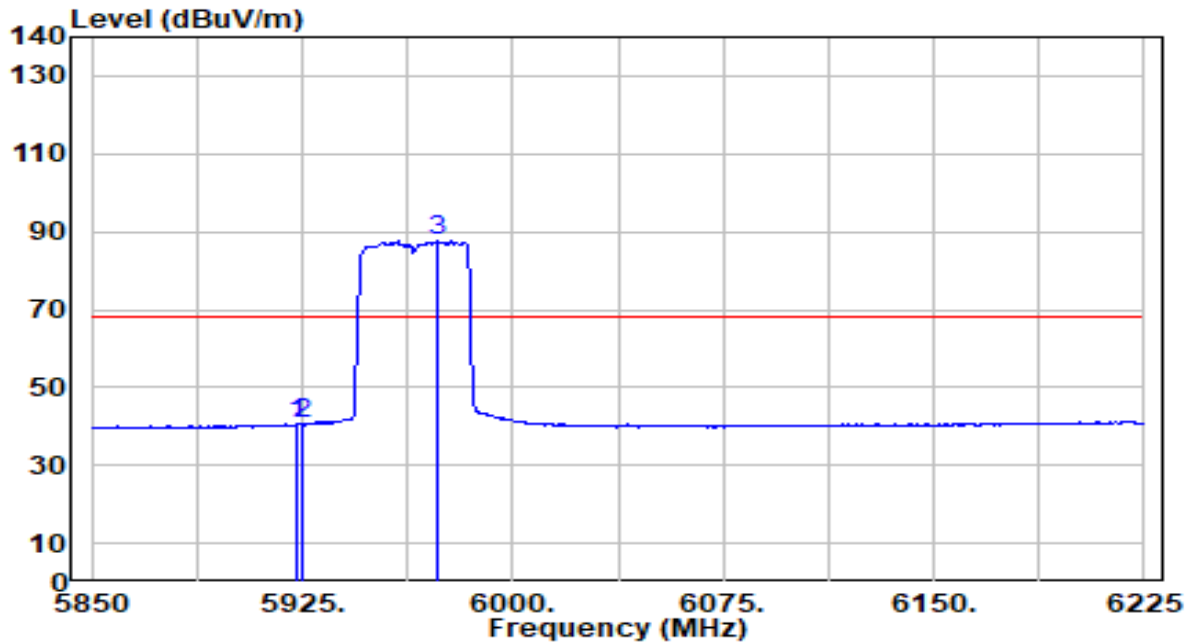


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5923.500        | 40.11          | 0.53       | 40.64                | -27.56      | 68.20          | 200         | 132         | Average           |
| 2  |   | 5925.000        | 39.95          | 0.53       | 40.47                | -27.73      | 68.20          | 200         | 132         | Average           |
| 3  |   | 5973.375        | 87.08          | 0.49       | 87.57                | N/A         | N/A            | 200         | 132         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 3_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

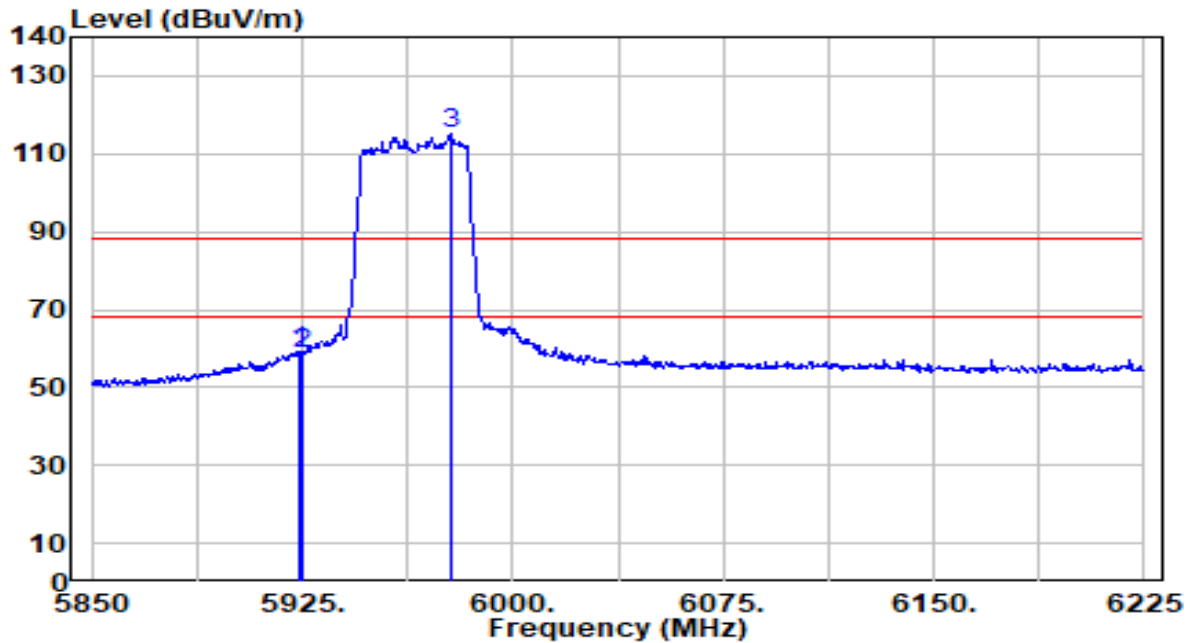


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 5923.875           | 58.70             | 0.53          | 59.23                   | -28.97         | 88.20             | 200            | 69             | Peak                 |
| 2  |   | 5925.000           | 58.34             | 0.53          | 58.87                   | -29.33         | 88.20             | 200            | 69             | Peak                 |
| 3  |   | 5977.875           | 114.43            | 0.49          | 114.92                  | N/A            | N/A               | 200            | 69             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 3_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

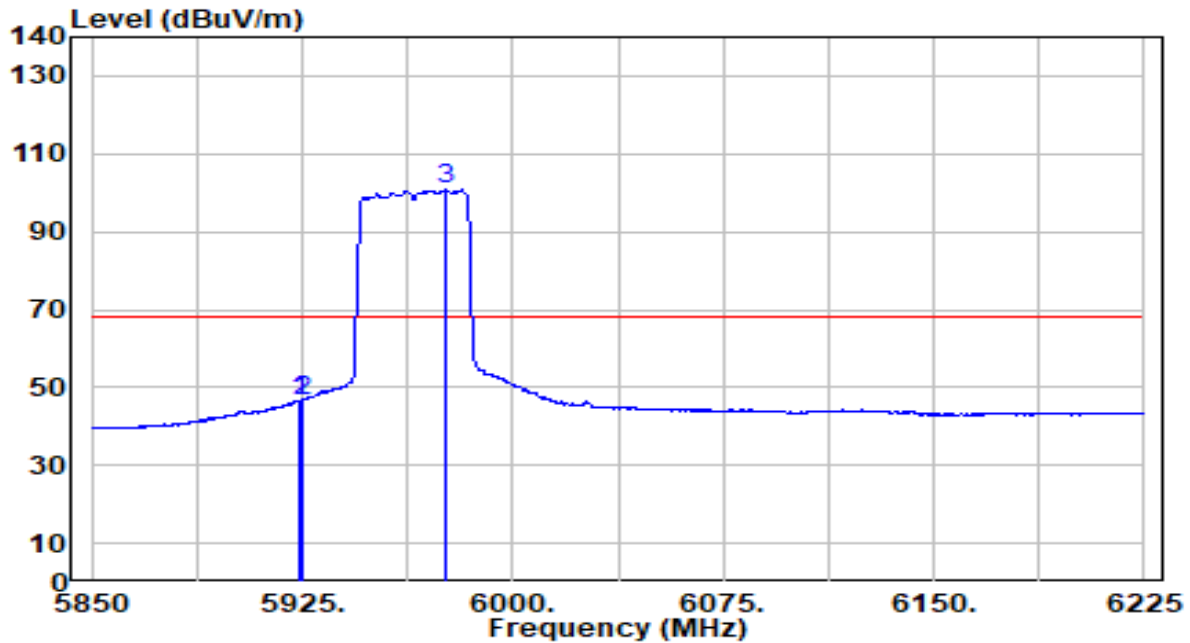


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5923.875        | 46.22          | 0.53       | 46.75                | -21.45      | 68.20          | 200         | 69          | Average           |
| 2  |   | 5925.000        | 46.20          | 0.53       | 46.72                | -21.48      | 68.20          | 200         | 69          | Average           |
| 3  |   | 5976.375        | 100.33         | 0.49       | 100.81               | N/A         | N/A            | 200         | 69          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

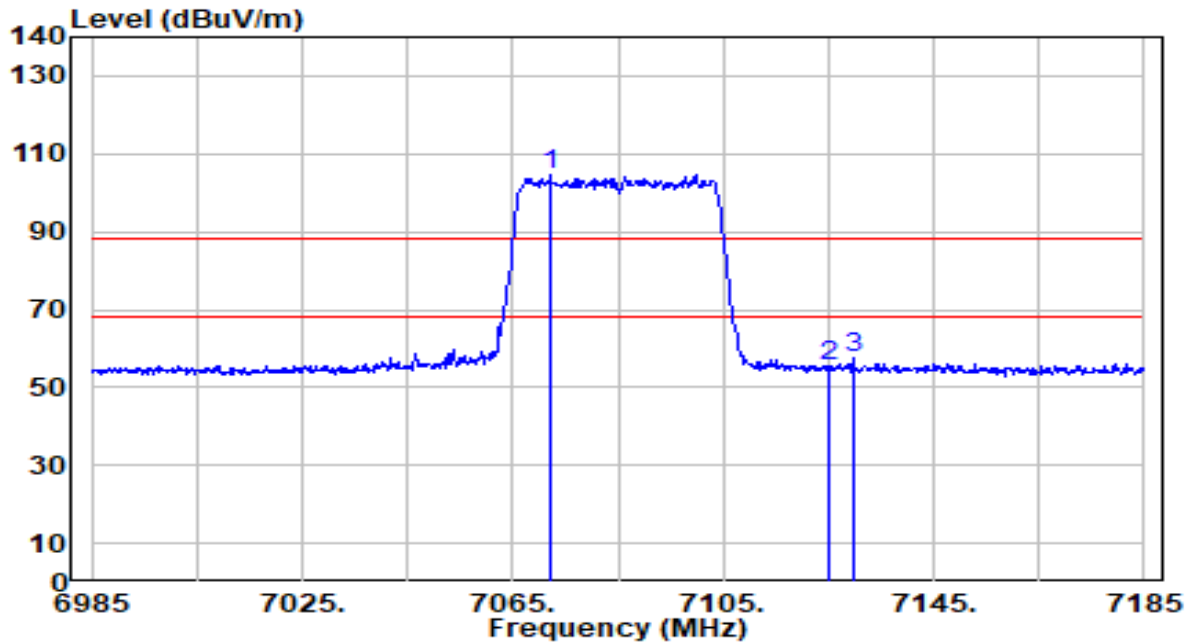


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7072.200        | 100.65         | 3.87       | 104.52               | N/A         | N/A            | 300         | 167         | Peak              |
| 2  | 7125.000        | 51.62          | 3.88       | 55.50                | -32.70      | 88.20          | 300         | 167         | Peak              |
| 3  | * 7129.600      | 53.71          | 3.88       | 57.59                | -30.61      | 88.20          | 300         | 167         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

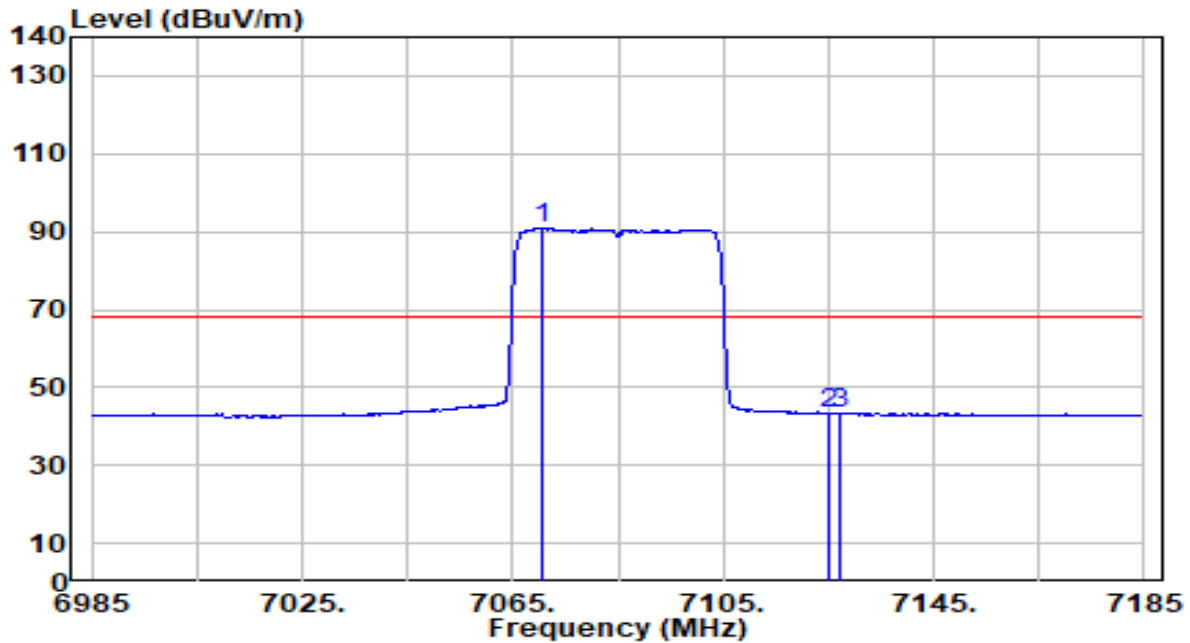


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7070.600        | 87.12          | 3.87       | 90.98                | N/A         | N/A            | 300         | 167         | Average           |
| 2  | 7125.000        | 39.45          | 3.88       | 43.33                | -24.87      | 68.20          | 300         | 167         | Average           |
| 3  | * 7127.200      | 39.57          | 3.88       | 43.45                | -24.75      | 68.20          | 300         | 167         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

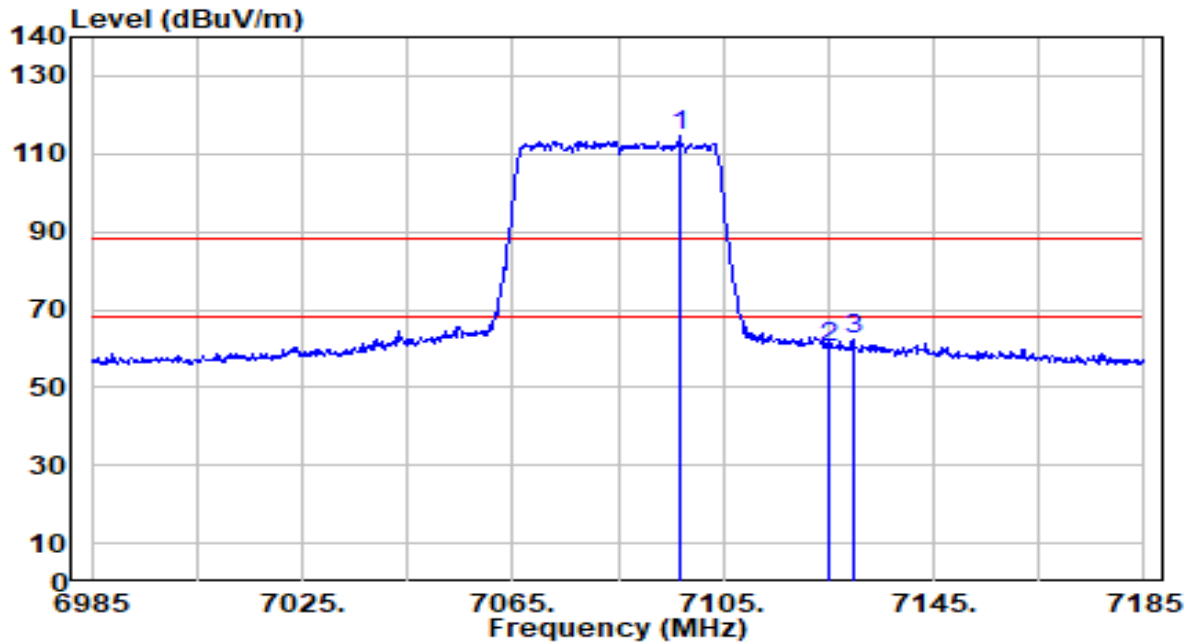


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7096.600        | 110.64         | 3.87       | 114.51               | N/A         | N/A            | 200         | 15          | Peak              |
| 2  | 7125.000        | 56.57          | 3.88       | 60.45                | -27.75      | 88.20          | 200         | 15          | Peak              |
| 3  | * 7129.600      | 58.20          | 3.88       | 62.08                | -26.12      | 88.20          | 200         | 15          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

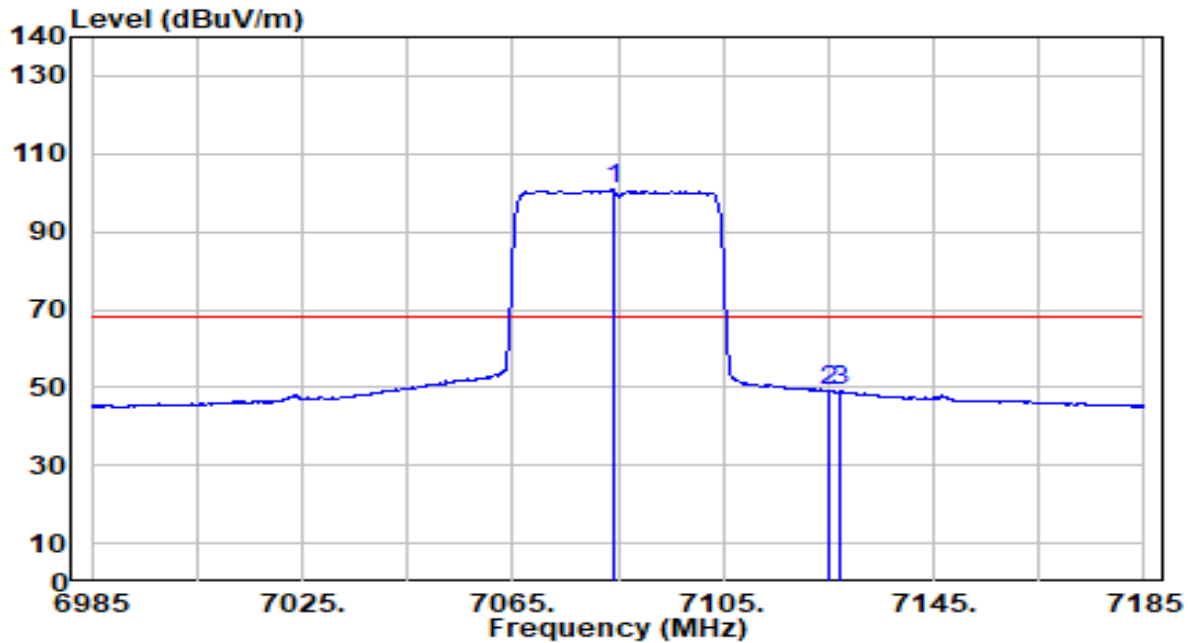


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7084.200        | 97.18          | 3.87       | 101.05               | N/A         | N/A            | 200         | 15          | Average           |
| 2  | 7125.000        | 45.00          | 3.88       | 48.88                | -19.32      | 68.20          | 200         | 15          | Average           |
| 3  | * 7127.400      | 45.05          | 3.88       | 48.92                | -19.28      | 68.20          | 200         | 15          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 7_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

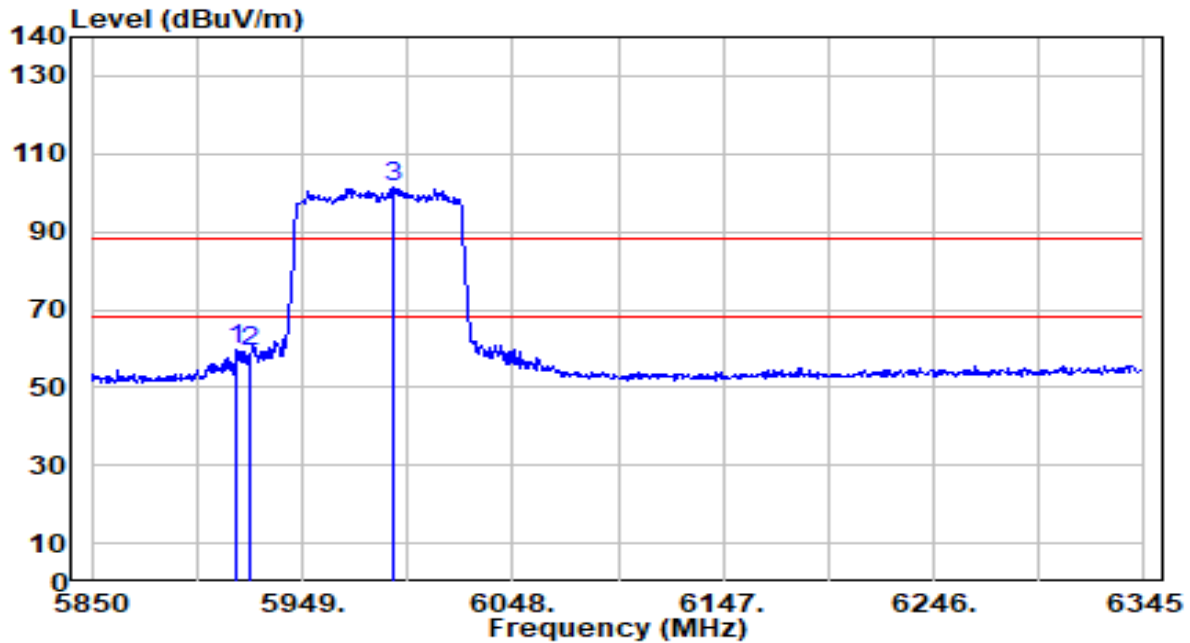


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5918.310        | 59.01          | 0.53       | 59.54                | -28.66      | 88.20          | 200         | 132         | Peak              |
| 2  |   | 5925.000        | 58.73          | 0.53       | 59.26                | -28.94      | 88.20          | 200         | 132         | Peak              |
| 3  |   | 5991.570        | 100.92         | 0.48       | 101.40               | N/A         | N/A            | 200         | 132         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 7_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

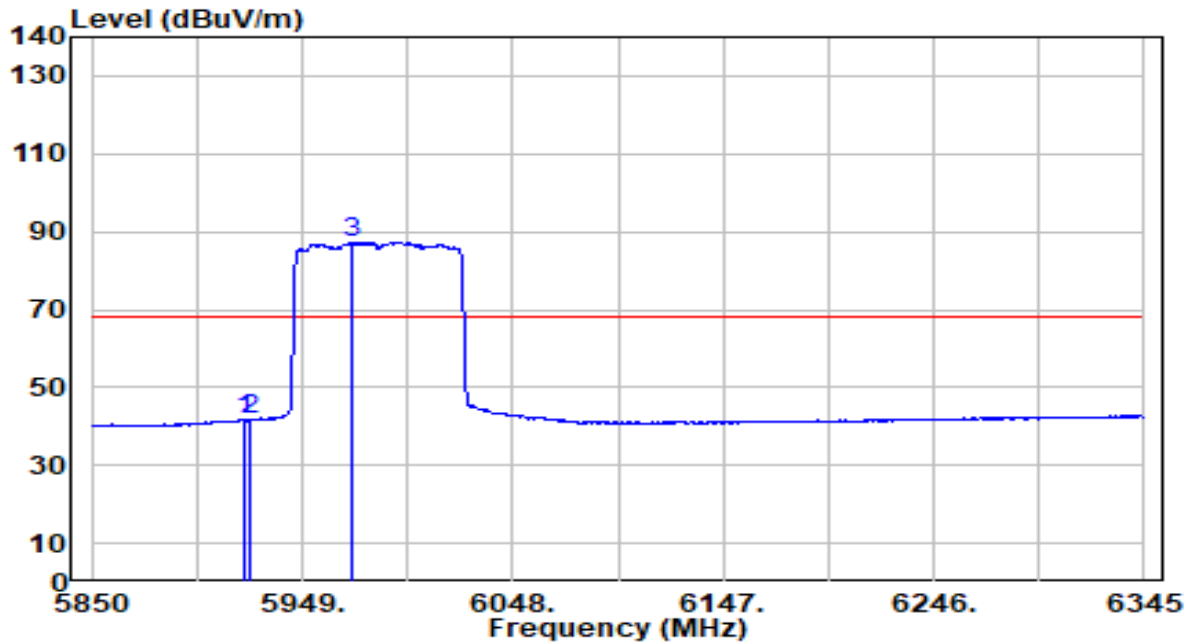


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5921.280        | 41.08          | 0.53       | 41.61                | -26.59      | 68.20          | 200         | 132         | Average           |
| 2  | * 5925.000      | 41.13          | 0.53       | 41.66                | -26.54      | 68.20          | 200         | 132         | Average           |
| 3  | 5972.760        | 86.85          | 0.49       | 87.35                | N/A         | N/A            | 200         | 132         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 7_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

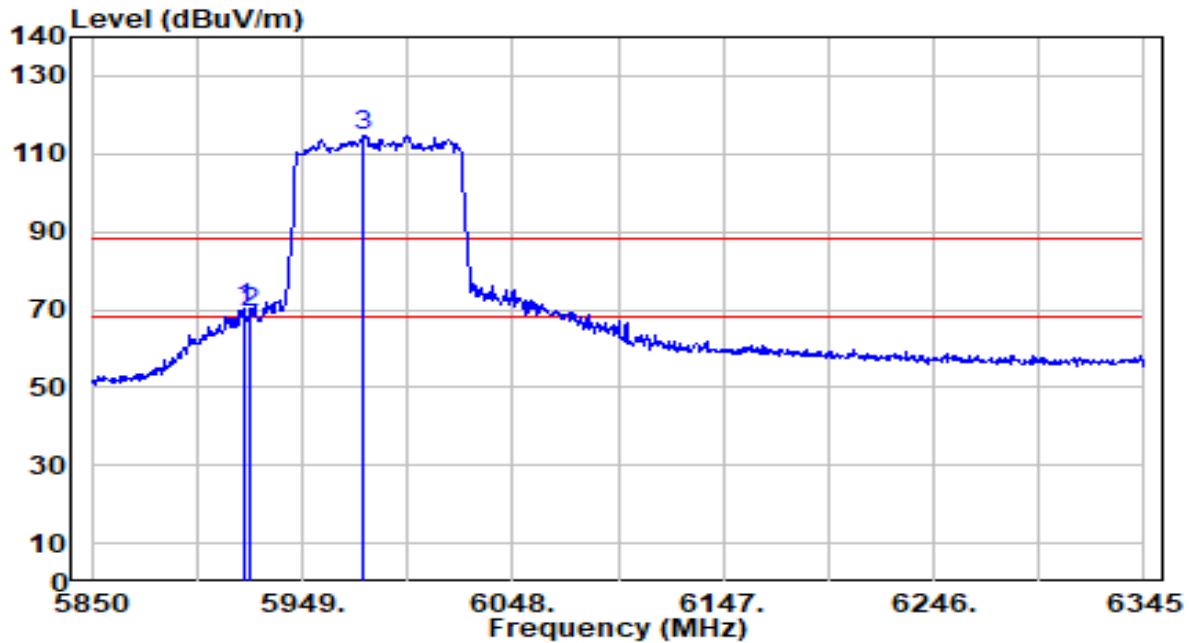


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5922.270        | 69.53          | 0.53       | 70.06                | -18.14      | 88.20          | 200         | 69          | Peak              |
| 2  |   | 5925.000        | 68.44          | 0.53       | 68.96                | -19.24      | 88.20          | 200         | 69          | Peak              |
| 3  |   | 5977.710        | 114.25         | 0.49       | 114.73               | N/A         | N/A            | 200         | 69          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 7_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

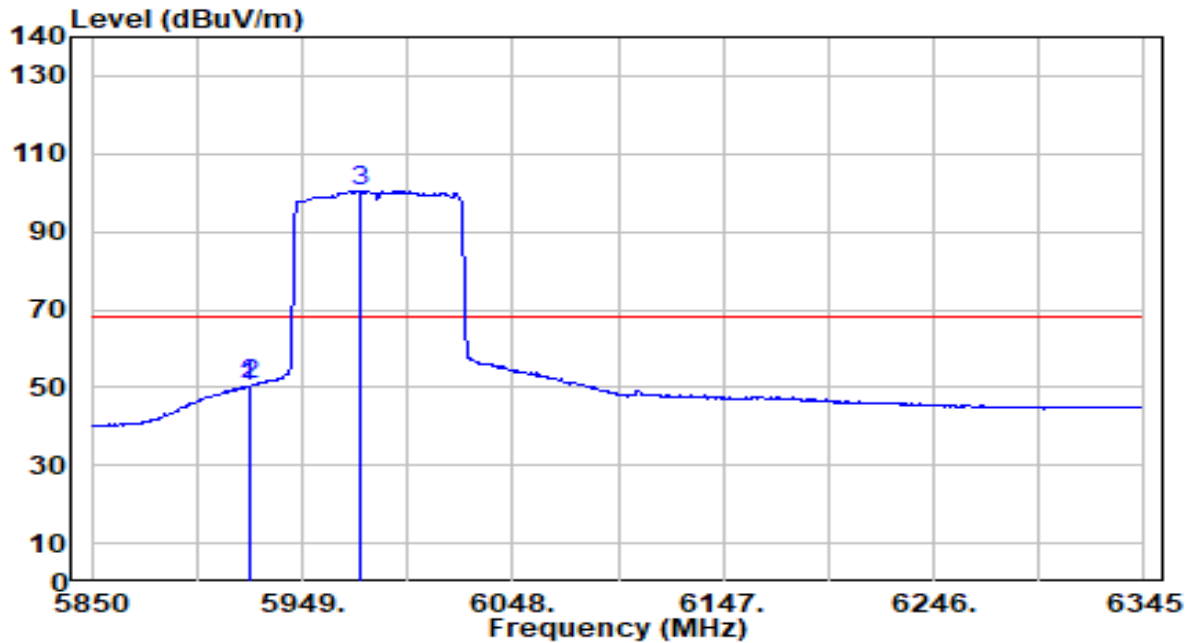


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5923.755        | 49.79          | 0.53       | 50.32                | -17.88      | 68.20          | 200         | 69          | Average           |
| 2  | * 5925.000      | 50.00          | 0.53       | 50.52                | -17.68      | 68.20          | 200         | 69          | Average           |
| 3  | 5976.225        | 99.89          | 0.49       | 100.38               | N/A         | N/A            | 200         | 69          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

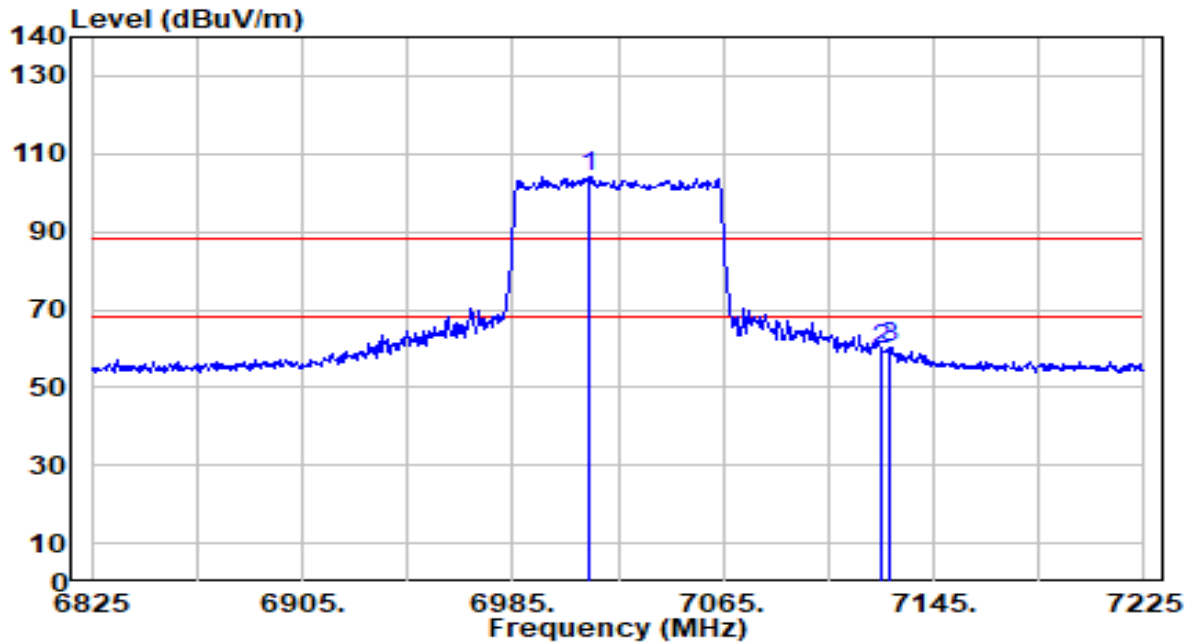


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7013.800        | 100.35         | 3.85       | 104.20               | N/A         | N/A            | 300         | 167         | Peak              |
| 2  | 7125.000        | 55.94          | 3.88       | 59.82                | -28.38      | 88.20          | 300         | 167         | Peak              |
| 3  | * 7127.800      | 56.19          | 3.88       | 60.06                | -28.14      | 88.20          | 300         | 167         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

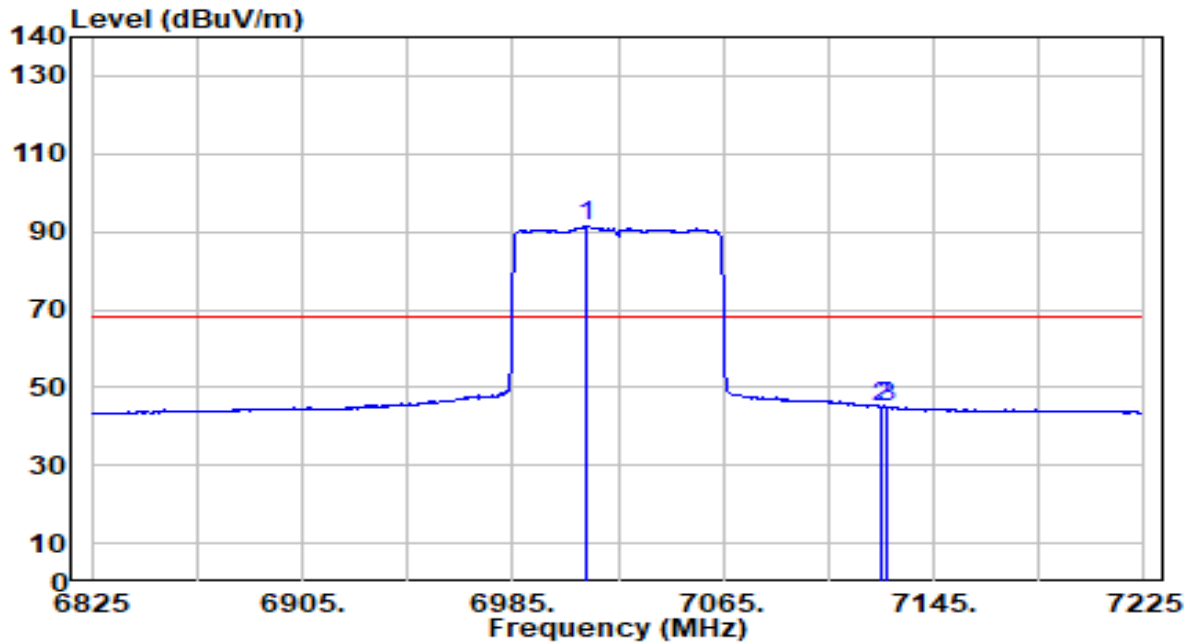


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7013.000        | 87.56          | 3.85       | 91.42                | N/A         | N/A            | 300         | 167         | Average           |
| 2  | 7125.000        | 41.08          | 3.88       | 44.96                | -23.24      | 68.20          | 300         | 167         | Average           |
| 3  | * 7127.400      | 41.14          | 3.88       | 45.02                | -23.18      | 68.20          | 300         | 167         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

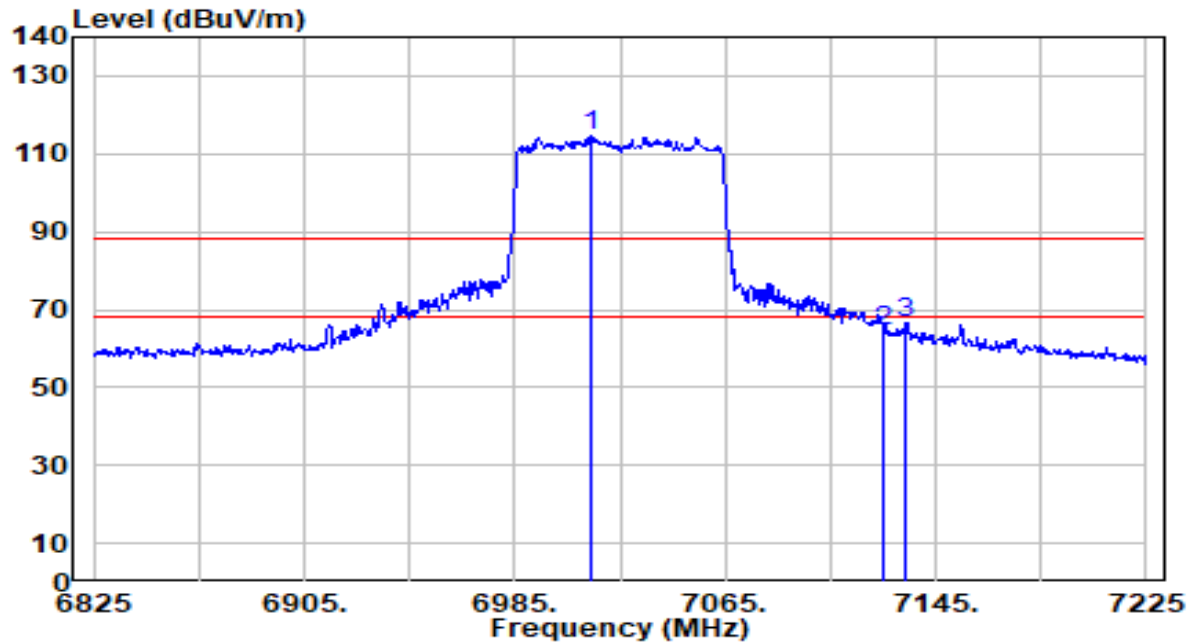


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7014.200        | 110.82         | 3.85       | 114.67               | N/A         | N/A            | 200         | 12          | Peak              |
| 2  | 7125.000        | 60.46          | 3.88       | 64.34                | -23.86      | 88.20          | 200         | 12          | Peak              |
| 3  | * 7133.800      | 62.94          | 3.88       | 66.82                | -21.38      | 88.20          | 200         | 12          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

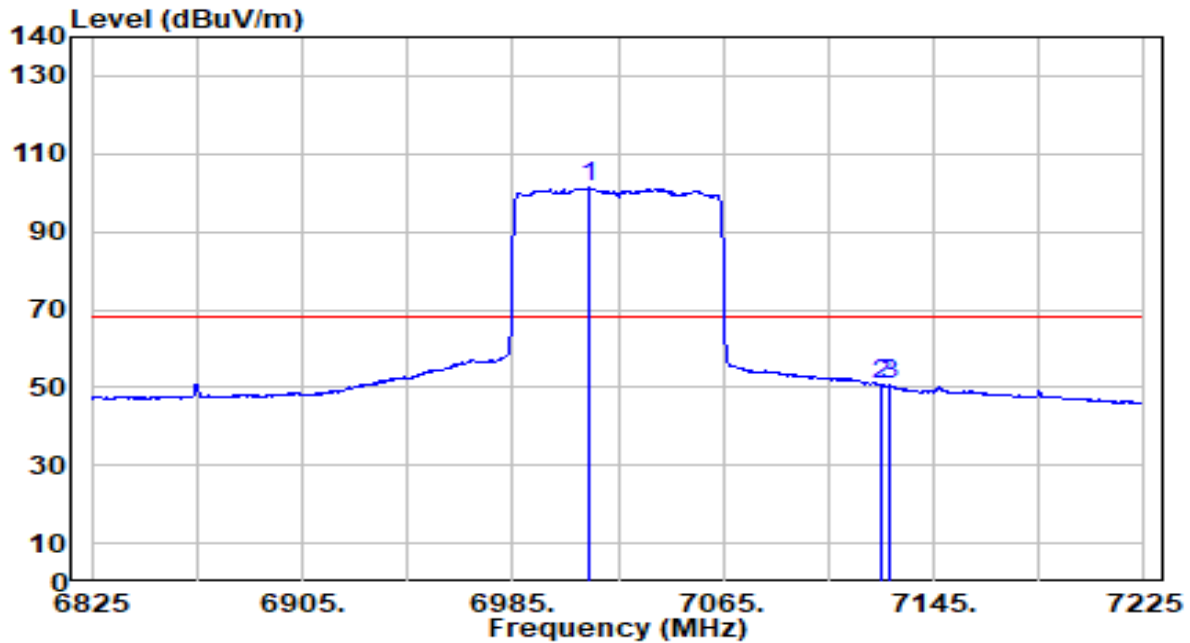


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7014.200        | 97.39          | 3.85       | 101.24               | N/A         | N/A            | 200         | 12          | Average           |
| 2  | 7125.000        | 46.64          | 3.88       | 50.52                | -17.68      | 68.20          | 200         | 12          | Average           |
| 3  | * 7128.200      | 46.69          | 3.88       | 50.57                | -17.63      | 68.20          | 200         | 12          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 15_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

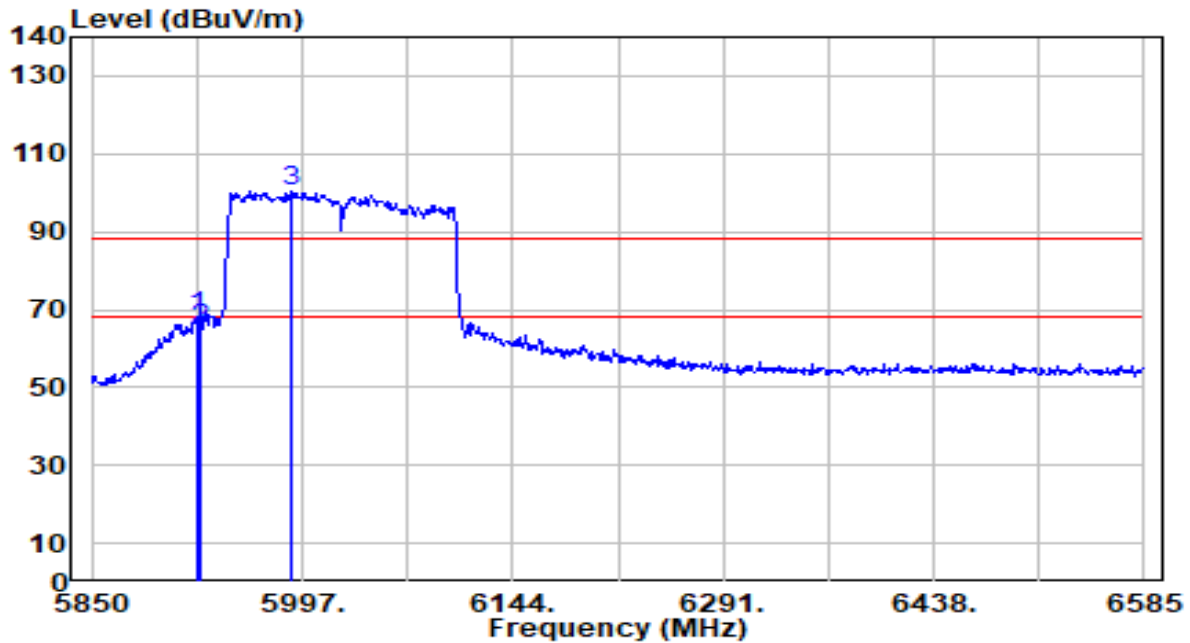


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5923.500        | 67.57          | 0.53       | 68.09                | -20.11      | 88.20          | 200         | 132         | Peak              |
| 2  |   | 5925.000        | 64.57          | 0.53       | 65.10                | -23.10      | 88.20          | 200         | 132         | Peak              |
| 3  |   | 5988.915        | 99.71          | 0.48       | 100.19               | N/A         | N/A            | 200         | 132         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 15_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

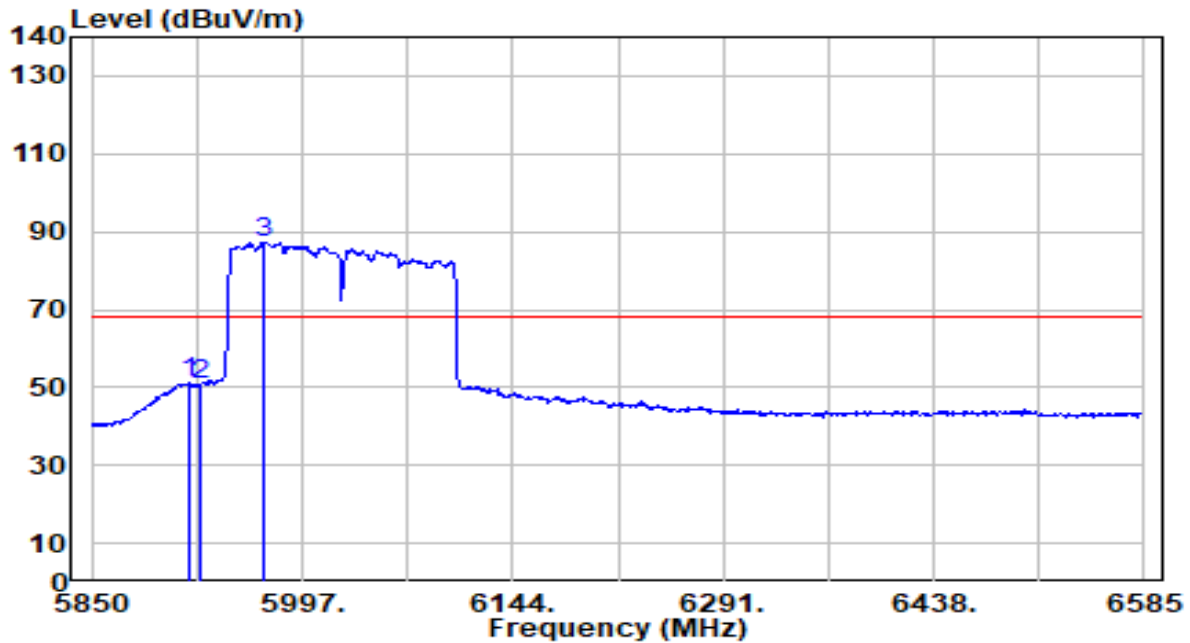


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5918.355        | 50.53          | 0.53       | 51.06                | -17.14      | 68.20          | 200         | 132         | Average           |
| 2  |   | 5925.000        | 49.93          | 0.53       | 50.46                | -17.74      | 68.20          | 200         | 132         | Average           |
| 3  |   | 5970.540        | 86.91          | 0.49       | 87.40                | N/A         | N/A            | 200         | 132         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 15_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

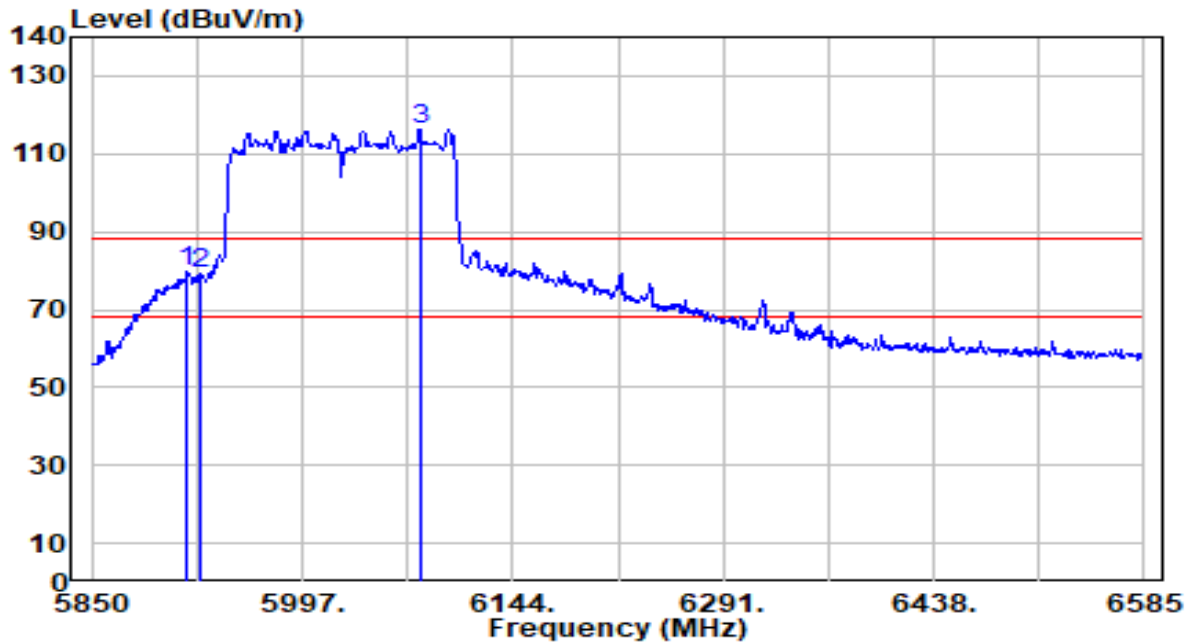


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5916.885        | 79.06          | 0.53       | 79.60                | -8.60       | 88.20          | 200         | 70          | Peak              |
| 2  |   | 5925.000        | 78.73          | 0.53       | 79.26                | -8.94       | 88.20          | 200         | 70          | Peak              |
| 3  |   | 6079.320        | 115.58         | 0.88       | 116.47               | N/A         | N/A            | 200         | 70          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 15_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

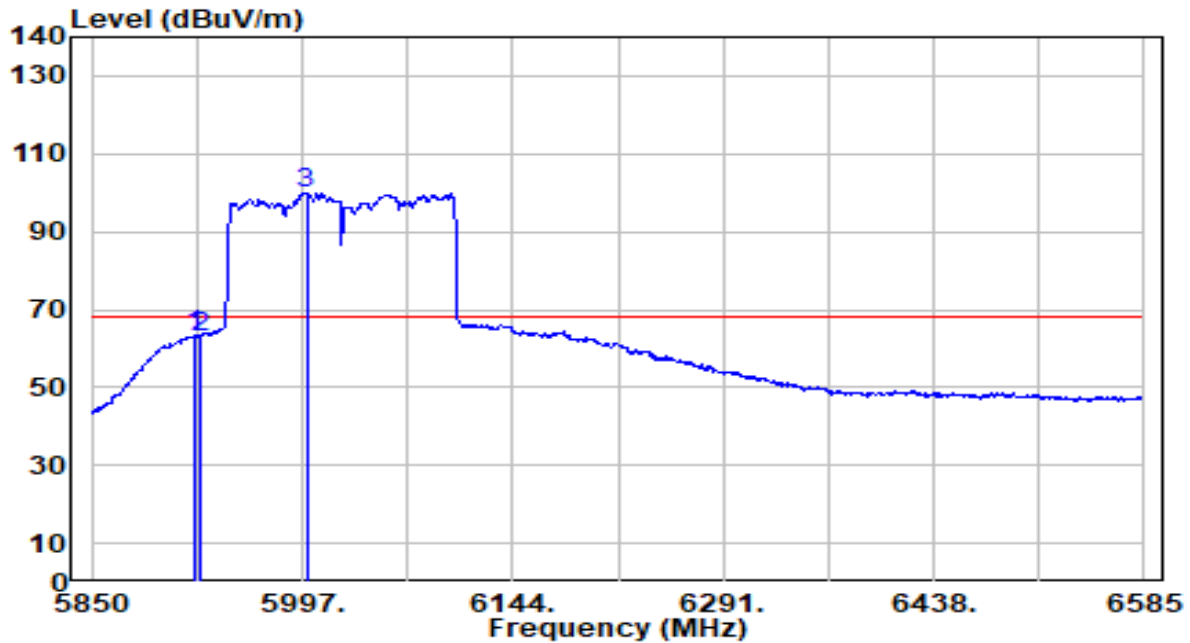


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5922.765        | 62.79          | 0.53       | 63.32                | -4.88       | 68.20          | 200         | 70          | Average           |
| 2  |   | 5925.000        | 62.57          | 0.53       | 63.10                | -5.10       | 68.20          | 200         | 70          | Average           |
| 3  |   | 5999.940        | 99.64          | 0.47       | 100.11               | N/A         | N/A            | 200         | 70          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

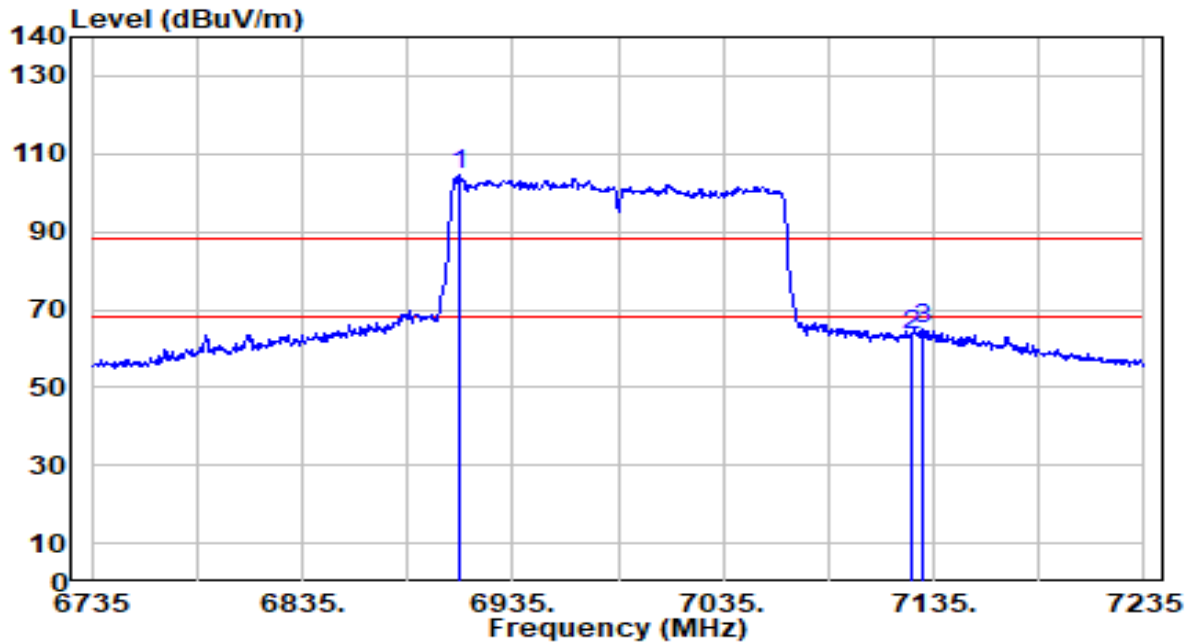


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 6909.500        | 100.77         | 3.82       | 104.60               | N/A         | N/A            | 300         | 47          | Peak              |
| 2  | 7125.000        | 59.28          | 3.88       | 63.16                | -25.04      | 88.20          | 300         | 47          | Peak              |
| 3  | * 7130.000      | 60.86          | 3.88       | 64.74                | -23.46      | 88.20          | 300         | 47          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

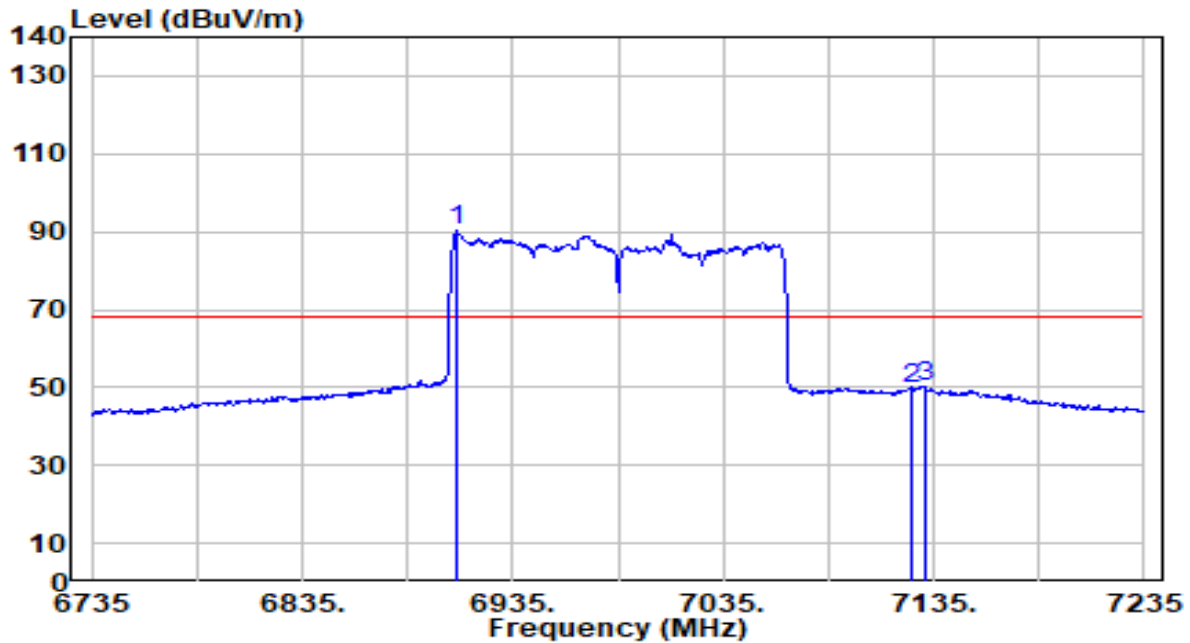


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 6908.500        | 86.27          | 3.82       | 90.09                | N/A         | N/A            | 300         | 47          | Average           |
| 2  | 7125.000        | 45.67          | 3.88       | 49.55                | -18.65      | 68.20          | 300         | 47          | Average           |
| 3  | * 7130.500      | 46.28          | 3.88       | 50.16                | -18.04      | 68.20          | 300         | 47          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

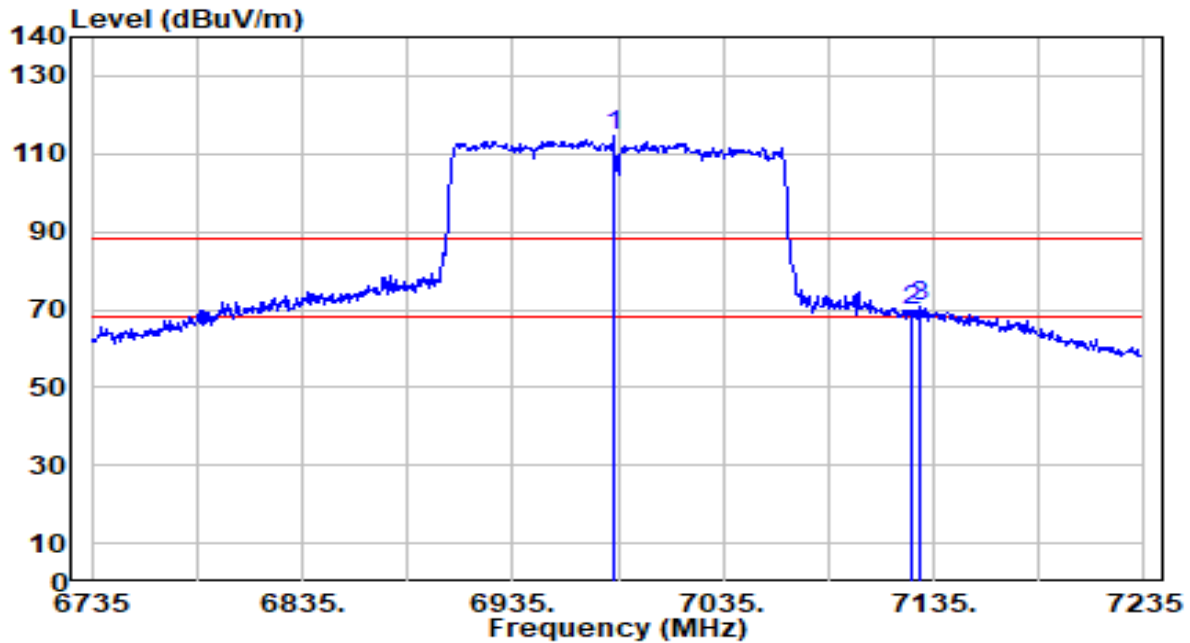


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 6982.500        | 110.70         | 3.84       | 114.54               | N/A         | N/A            | 200         | 243         | Peak              |
| 2  | 7125.000        | 65.61          | 3.88       | 69.49                | -18.71      | 88.20          | 200         | 243         | Peak              |
| 3  | * 7128.000      | 66.67          | 3.88       | 70.55                | -17.65      | 88.20          | 200         | 243         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

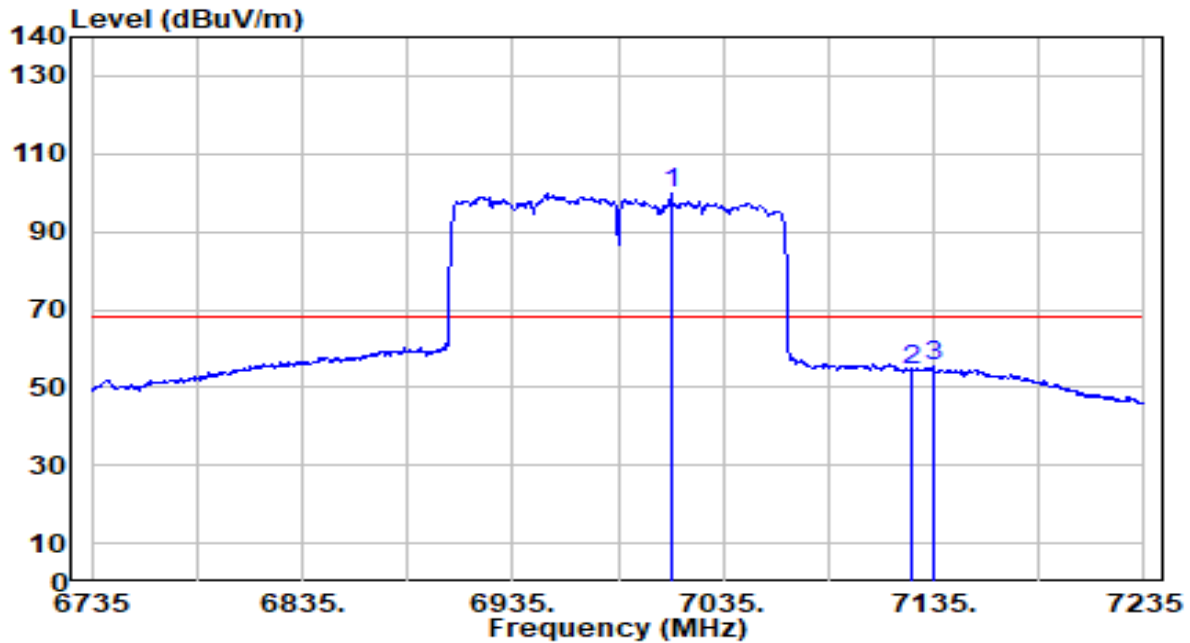


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7010.000        | 96.07          | 3.85       | 99.92                | N/A         | N/A            | 200         | 243         | Average           |
| 2  | 7125.000        | 50.41          | 3.88       | 54.29                | -13.91      | 68.20          | 200         | 243         | Average           |
| 3  | * 7134.500      | 51.39          | 3.88       | 55.27                | -12.93      | 68.20          | 200         | 243         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band5_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

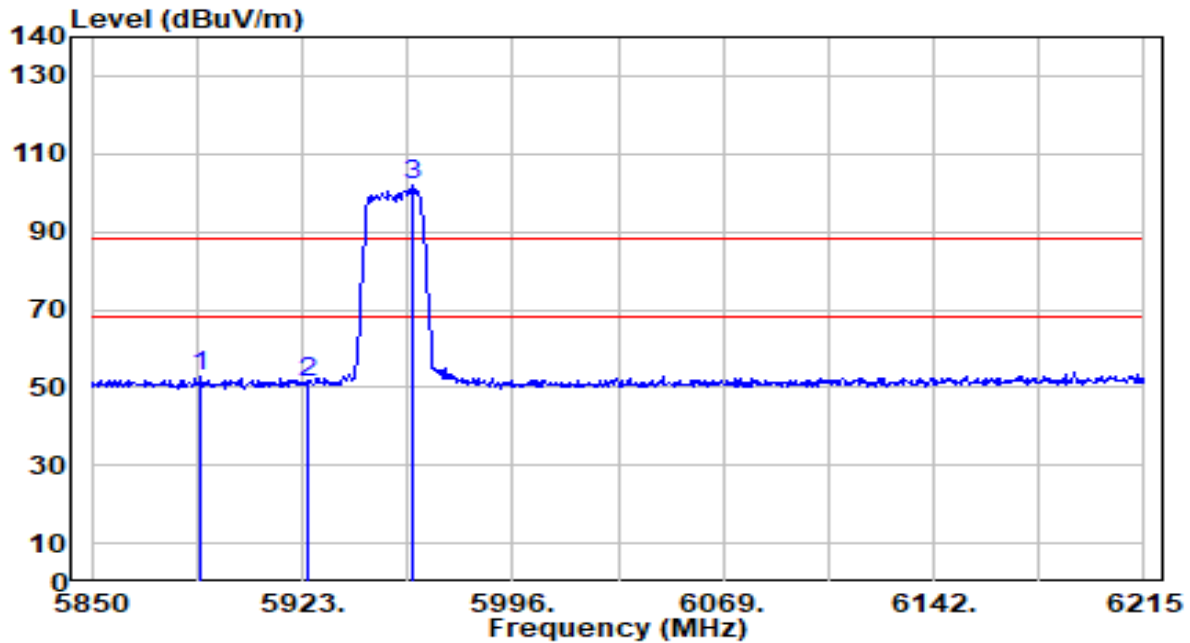


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 5887.595           | 52.27             | 0.56          | 52.82                   | -35.38         | 88.20             | 200            | 133            | Peak                 |
| 2  |   | 5925.000           | 50.62             | 0.53          | 51.14                   | -37.06         | 88.20             | 200            | 133            | Peak                 |
| 3  |   | 5961.325           | 101.35            | 0.50          | 101.85                  | N/A            | N/A               | 200            | 133            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band5_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

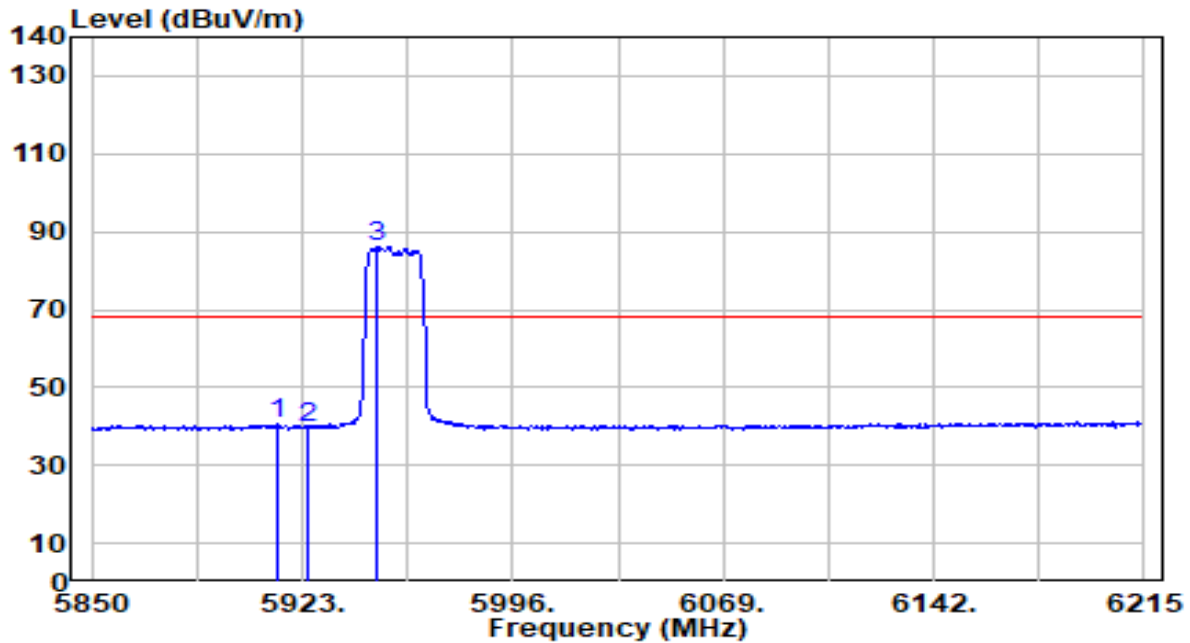


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5914.240        | 39.98          | 0.54       | 40.52                | -27.68      | 68.20          | 200         | 133         | Average           |
| 2  |   | 5925.000        | 39.05          | 0.53       | 39.58                | -28.62      | 68.20          | 200         | 133         | Average           |
| 3  |   | 5948.915        | 85.52          | 0.51       | 86.02                | N/A         | N/A            | 200         | 133         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band5_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

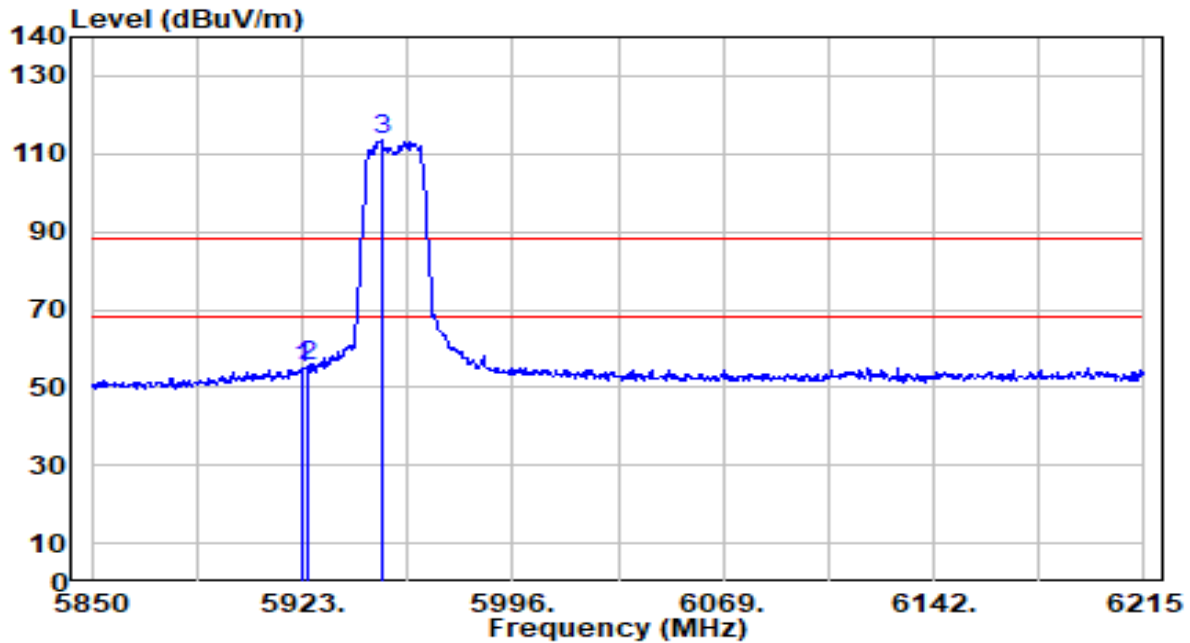


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5923.365        | 54.51          | 0.53       | 55.04                | -33.16      | 88.20          | 200         | 72          | Peak              |
| 2  | * 5925.000      | 54.88          | 0.53       | 55.41                | -32.79      | 88.20          | 200         | 72          | Peak              |
| 3  | 5950.375        | 113.20         | 0.51       | 113.71               | N/A         | N/A            | 200         | 72          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band5_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

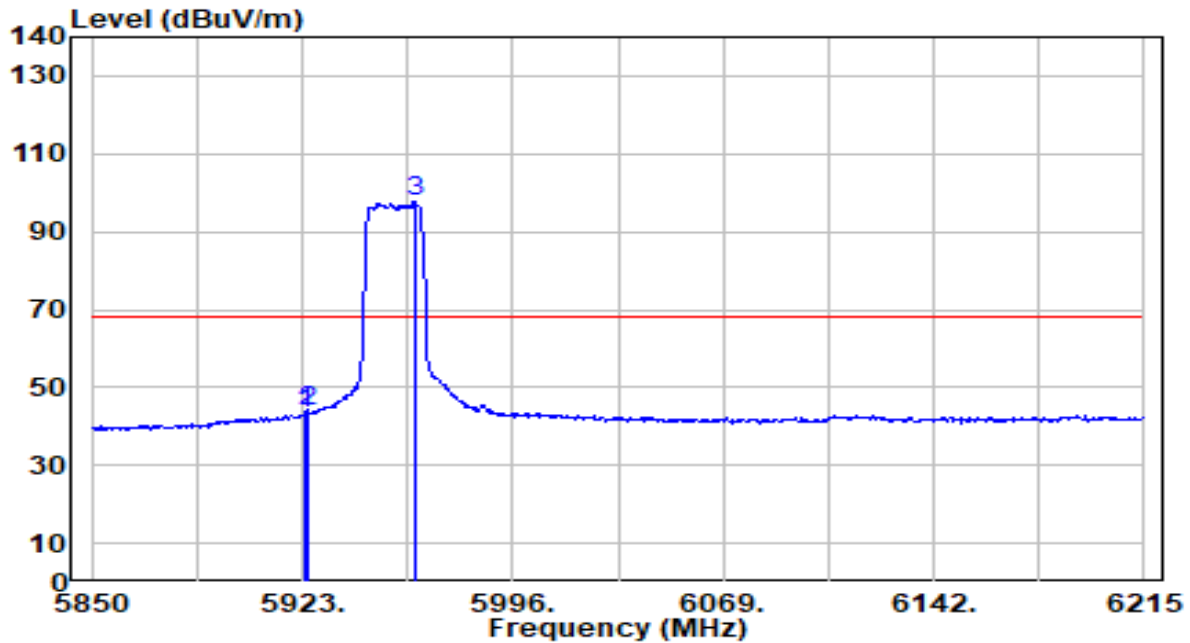


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5923.730        | 42.93          | 0.53       | 43.46                | -24.74      | 68.20          | 200         | 72          | Average           |
| 2  | * 5925.000      | 43.42          | 0.53       | 43.95                | -24.25      | 68.20          | 200         | 72          | Average           |
| 3  | 5962.420        | 96.98          | 0.50       | 97.48                | N/A         | N/A            | 200         | 72          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

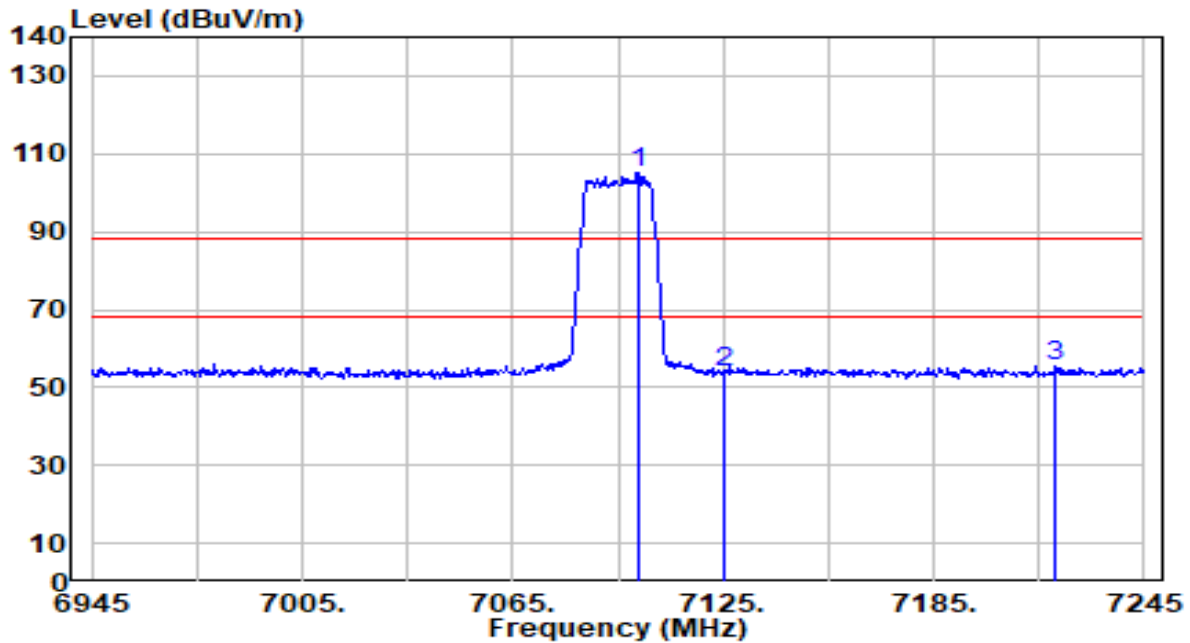


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7101.000        | 101.40         | 3.87       | 105.27               | N/A         | N/A            | 300         | 167         | Peak              |
| 2  | 7125.000        | 50.01          | 3.88       | 53.88                | -34.32      | 88.20          | 300         | 167         | Peak              |
| 3  | * 7219.500      | 51.63          | 3.90       | 55.53                | -32.67      | 88.20          | 300         | 167         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

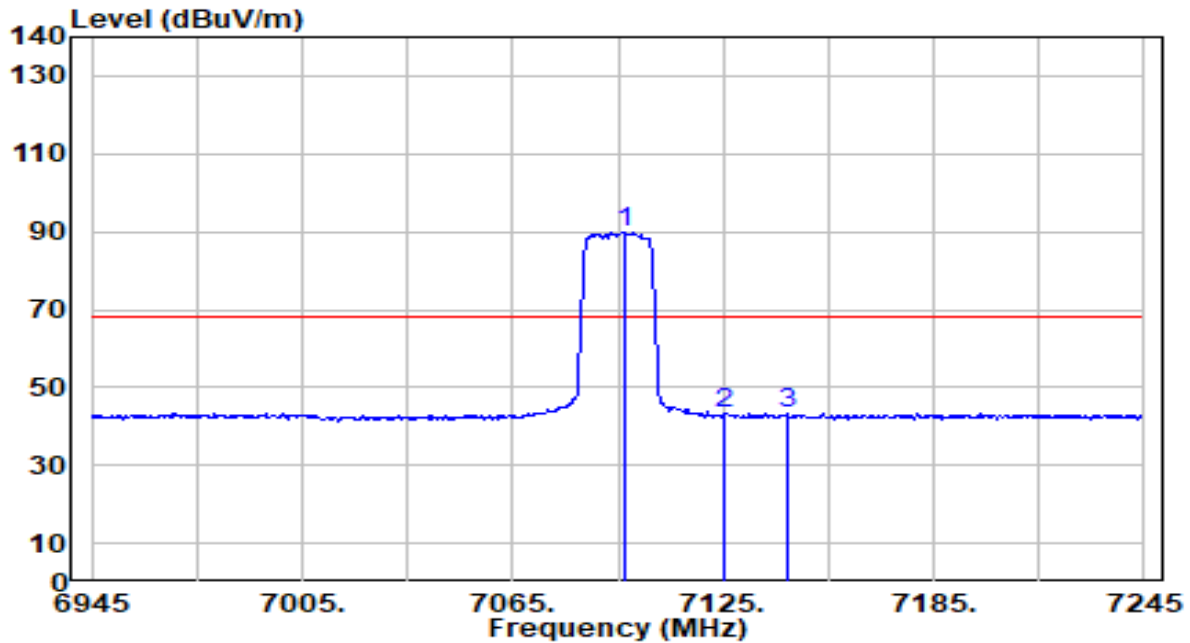


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7096.800        | 86.11          | 3.87       | 89.98                | N/A         | N/A            | 300         | 167         | Average           |
| 2  | 7125.000        | 39.22          | 3.88       | 43.10                | -25.10      | 68.20          | 300         | 167         | Average           |
| 3  | * 7143.000      | 39.24          | 3.88       | 43.13                | -25.07      | 68.20          | 300         | 167         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

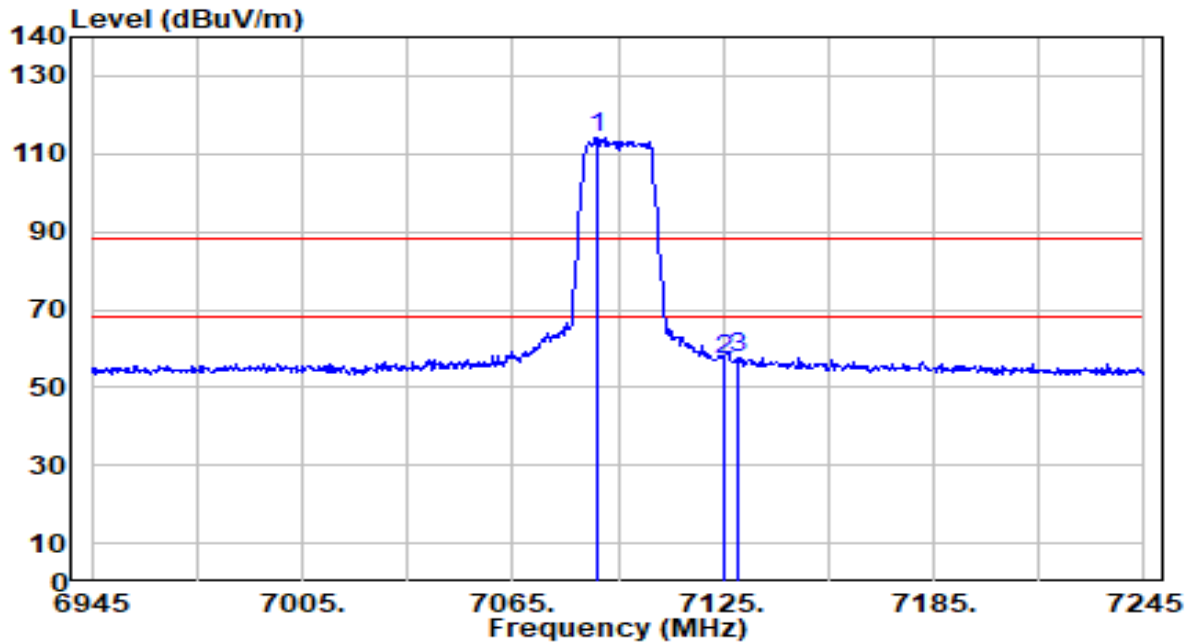


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7089.000        | 110.18         | 3.87       | 114.04               | N/A         | N/A            | 210         | 16          | Peak              |
| 2  | 7125.000        | 53.19          | 3.88       | 57.07                | -31.13      | 88.20          | 210         | 16          | Peak              |
| 3  | * 7129.500      | 53.96          | 3.88       | 57.84                | -30.36      | 88.20          | 210         | 16          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

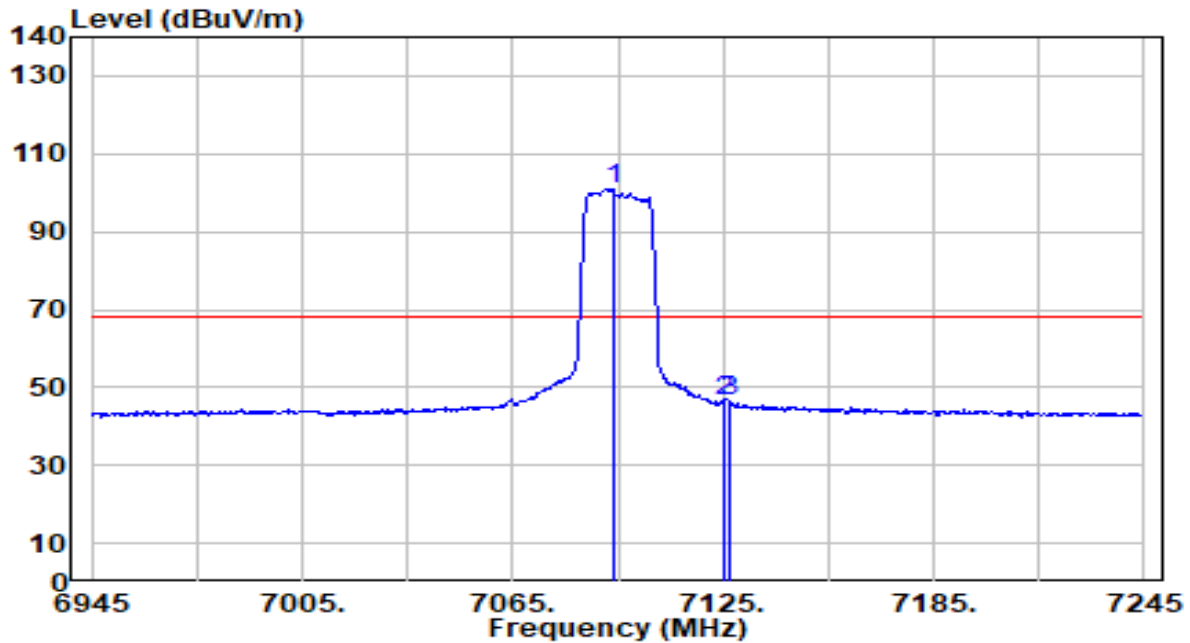


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7093.800        | 97.21          | 3.87       | 101.08               | N/A         | N/A            | 210         | 16          | Average           |
| 2  | 7125.000        | 42.39          | 3.88       | 46.27                | -21.93      | 68.20          | 210         | 16          | Average           |
| 3  | * 7126.800      | 42.45          | 3.88       | 46.33                | -21.87      | 68.20          | 210         | 16          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band5_CH 3_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

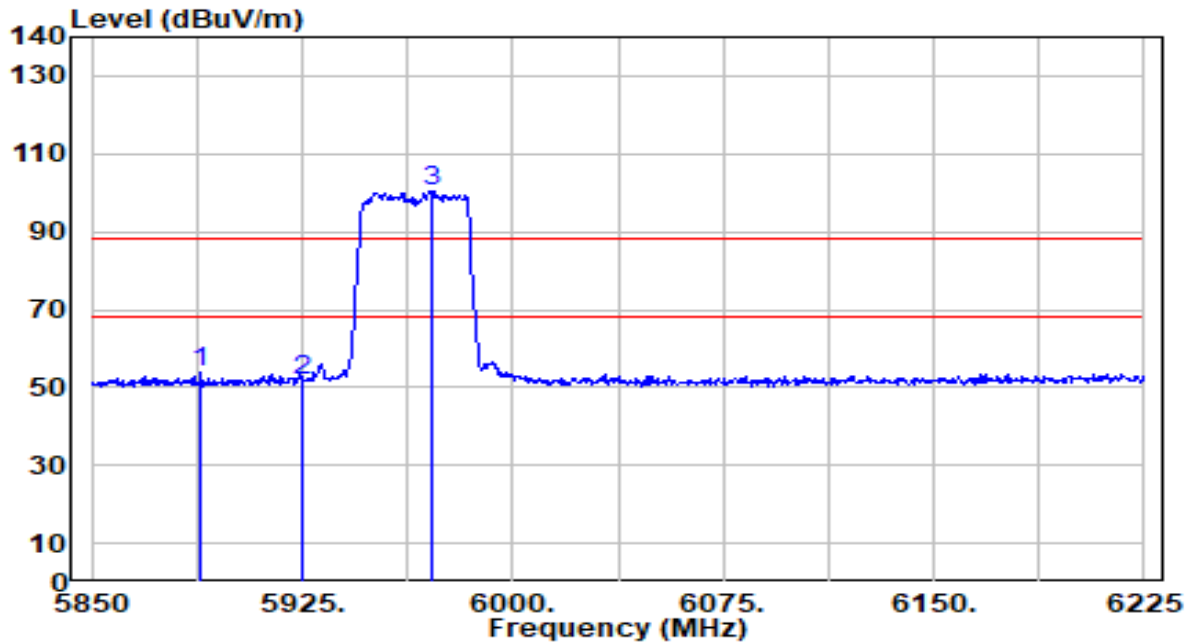


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5888.625        | 53.13          | 0.55       | 53.68                | -34.52      | 88.20          | 200         | 132         | Peak              |
| 2  |   | 5925.000        | 51.14          | 0.53       | 51.67                | -36.53      | 88.20          | 200         | 132         | Peak              |
| 3  |   | 5971.500        | 100.14         | 0.49       | 100.63               | N/A         | N/A            | 200         | 132         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band5_CH 3_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

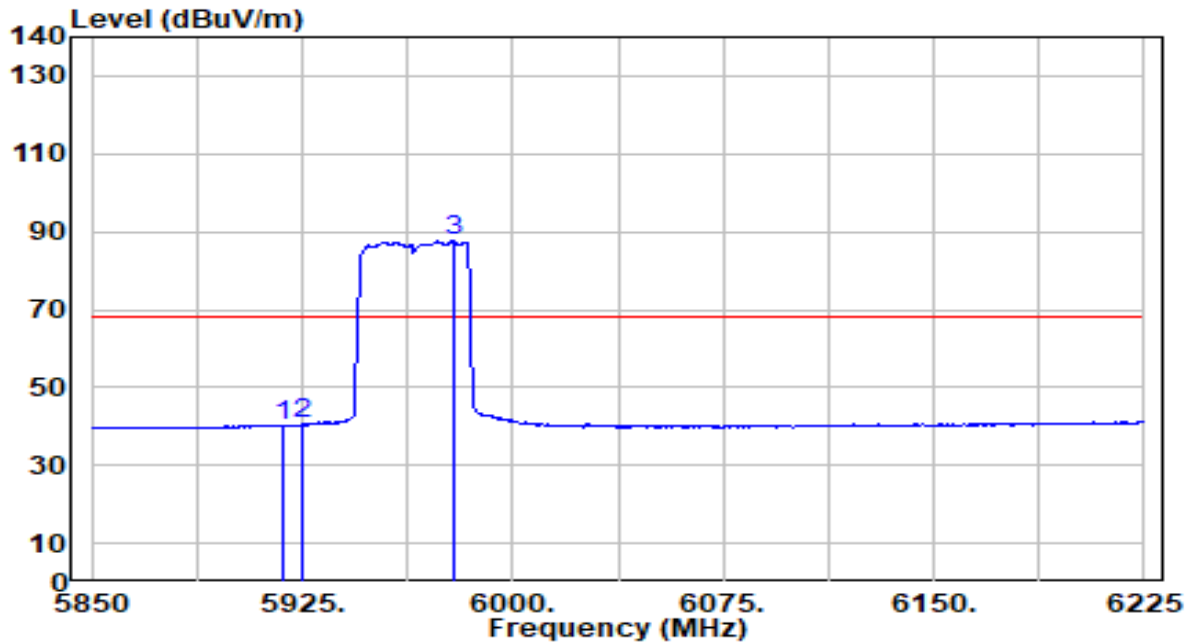


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5917.875        | 39.83          | 0.53       | 40.36                | -27.84      | 68.20          | 200         | 132         | Average           |
| 2  | * 5925.000      | 40.01          | 0.53       | 40.53                | -27.67      | 68.20          | 200         | 132         | Average           |
| 3  | 5978.625        | 87.10          | 0.49       | 87.59                | N/A         | N/A            | 200         | 132         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band5_CH 3_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

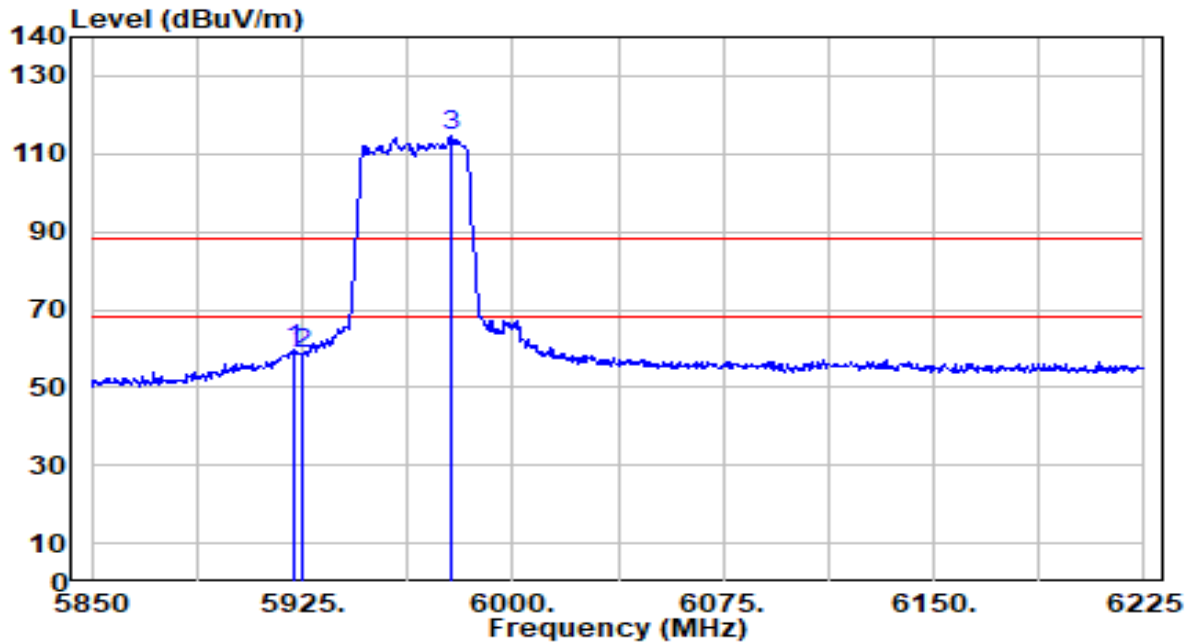


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5922.000        | 58.93          | 0.53       | 59.45                | -28.75      | 88.20          | 200         | 69          | Peak              |
| 2  |   | 5925.000        | 58.21          | 0.53       | 58.74                | -29.46      | 88.20          | 200         | 69          | Peak              |
| 3  |   | 5977.875        | 114.24         | 0.49       | 114.73               | N/A         | N/A            | 200         | 69          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band5_CH 3_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

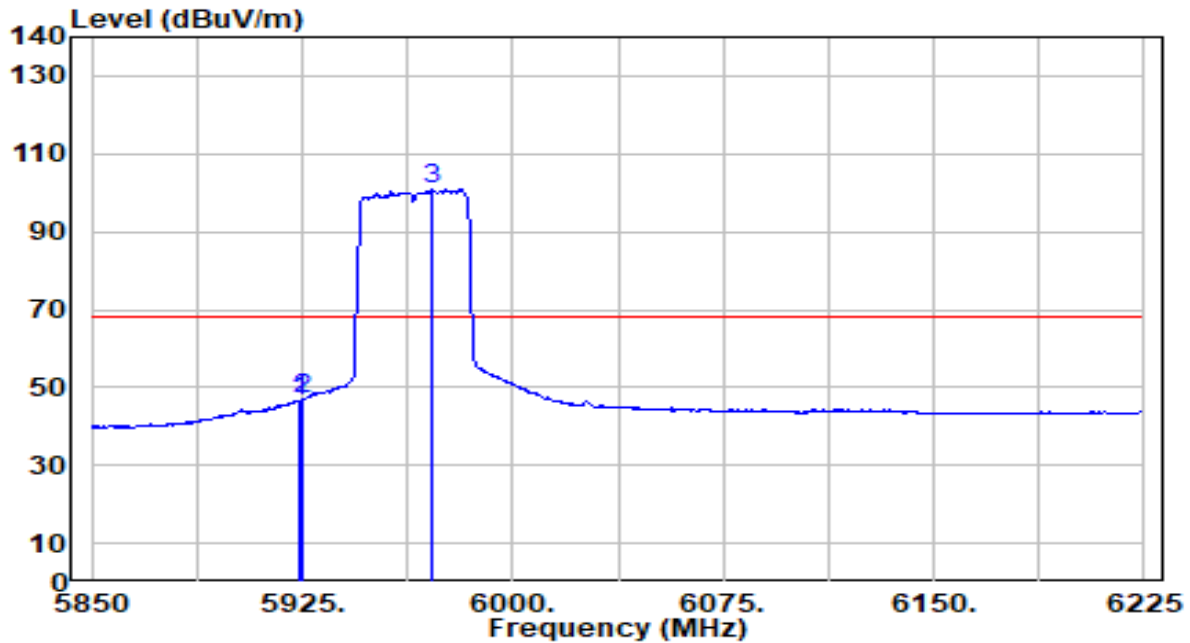


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5923.875        | 46.12          | 0.53       | 46.64                | -21.56      | 68.20          | 200         | 69          | Average           |
| 2  | * 5925.000      | 46.46          | 0.53       | 46.98                | -21.22      | 68.20          | 200         | 69          | Average           |
| 3  | 5971.125        | 100.30         | 0.49       | 100.79               | N/A         | N/A            | 200         | 69          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

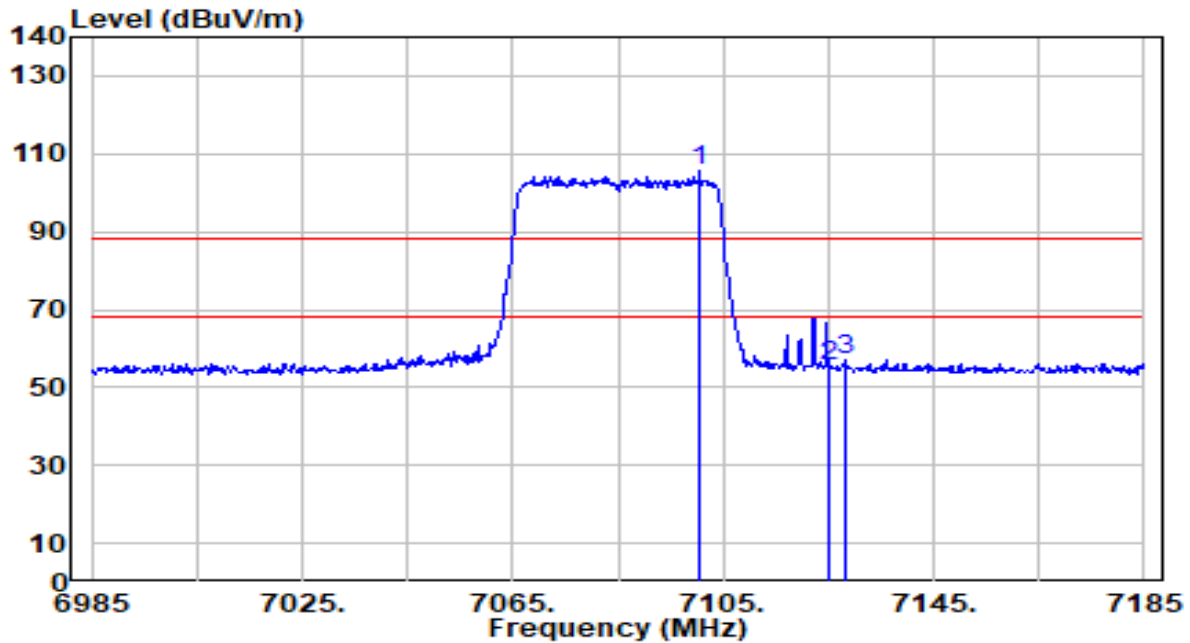


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7100.400        | 101.82         | 3.87       | 105.69               | N/A         | N/A            | 300         | 167         | Peak              |
| 2  | 7125.000        | 51.59          | 3.88       | 55.46                | -32.74      | 88.20          | 300         | 167         | Peak              |
| 3  | * 7128.200      | 53.34          | 3.88       | 57.22                | -30.98      | 88.20          | 300         | 167         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

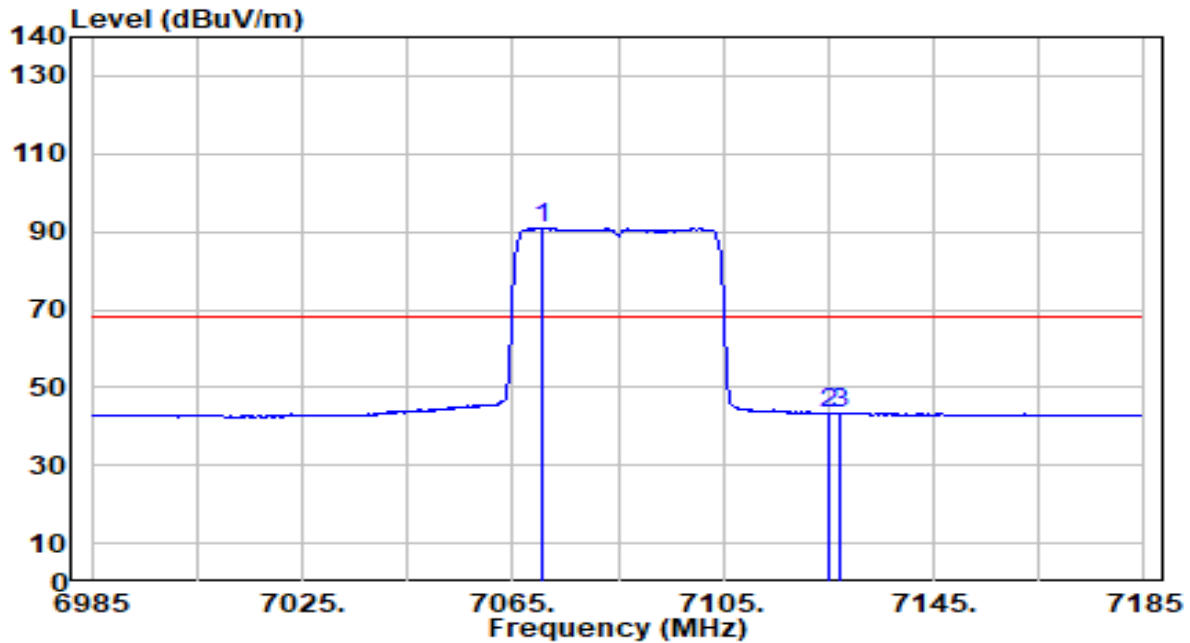


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7070.600        | 87.26          | 3.87       | 91.13                | N/A         | N/A            | 300         | 167         | Average           |
| 2  | * 7125.000      | 39.59          | 3.88       | 43.47                | -24.73      | 68.20          | 300         | 167         | Average           |
| 3  | 7127.200        | 39.56          | 3.88       | 43.44                | -24.76      | 68.20          | 300         | 167         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

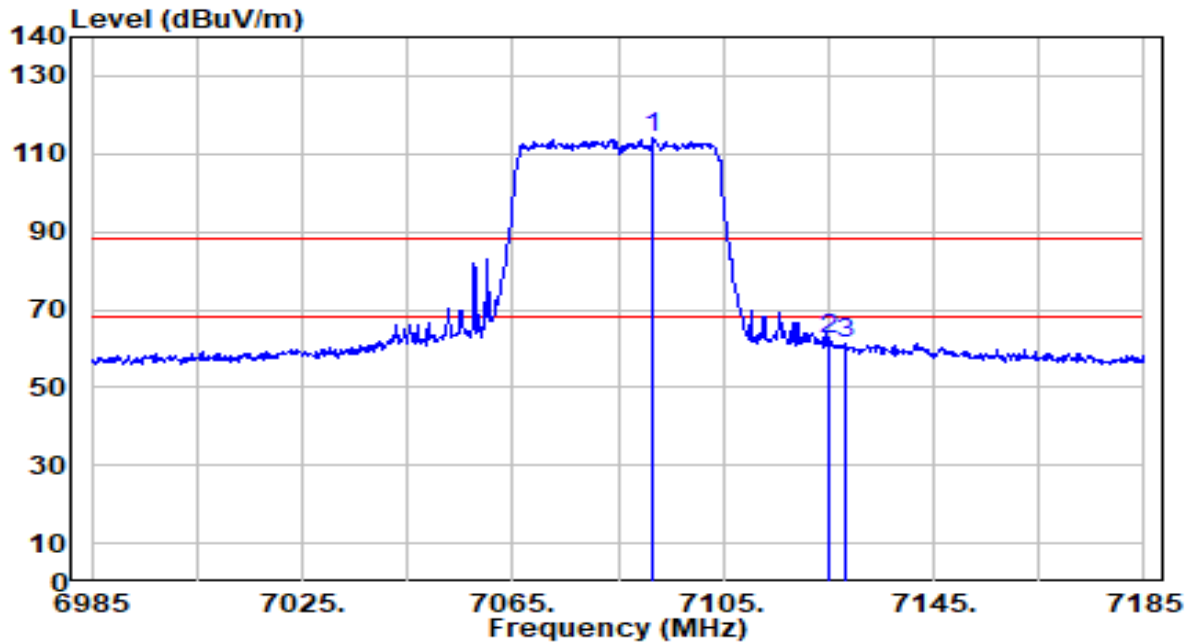


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7091.800        | 110.05         | 3.87       | 113.92               | N/A         | N/A            | 200         | 16          | Peak              |
| 2  | * 7125.000      | 58.65          | 3.88       | 62.53                | -25.67      | 88.20          | 200         | 16          | Peak              |
| 3  | 7128.000        | 57.50          | 3.88       | 61.37                | -26.83      | 88.20          | 200         | 16          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

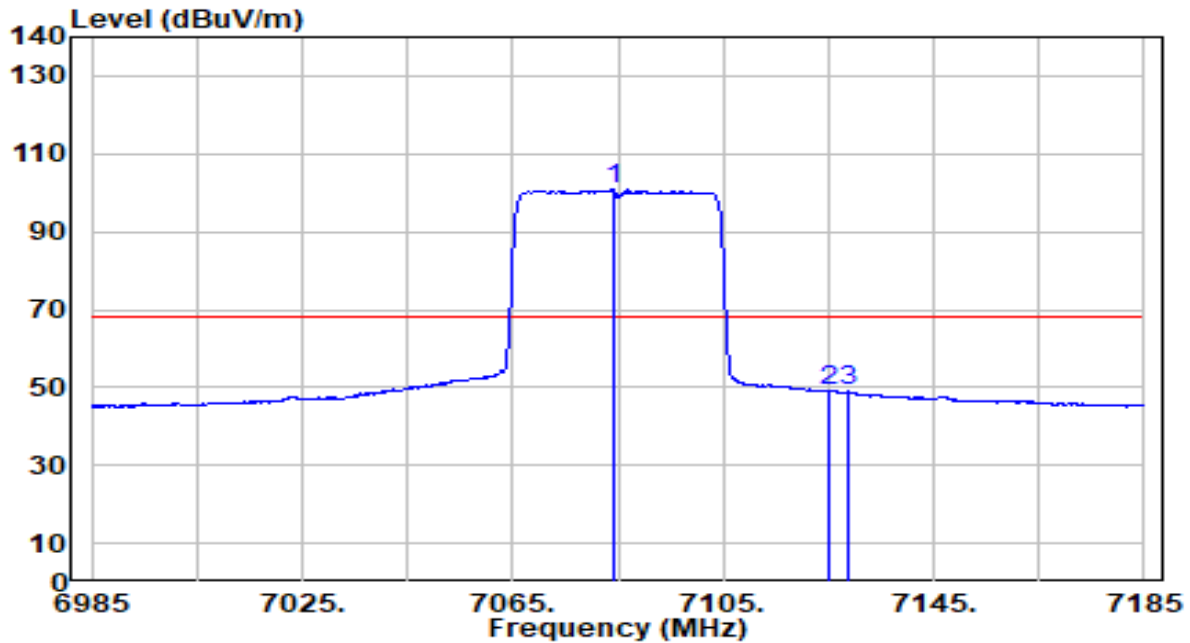


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7084.000        | 96.99          | 3.87       | 100.86               | N/A         | N/A            | 200         | 16          | Average           |
| 2  | * 7125.000      | 45.10          | 3.88       | 48.98                | -19.22      | 68.20          | 200         | 16          | Average           |
| 3  | 7128.600        | 45.04          | 3.88       | 48.91                | -19.29      | 68.20          | 200         | 16          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band5_CH 7_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

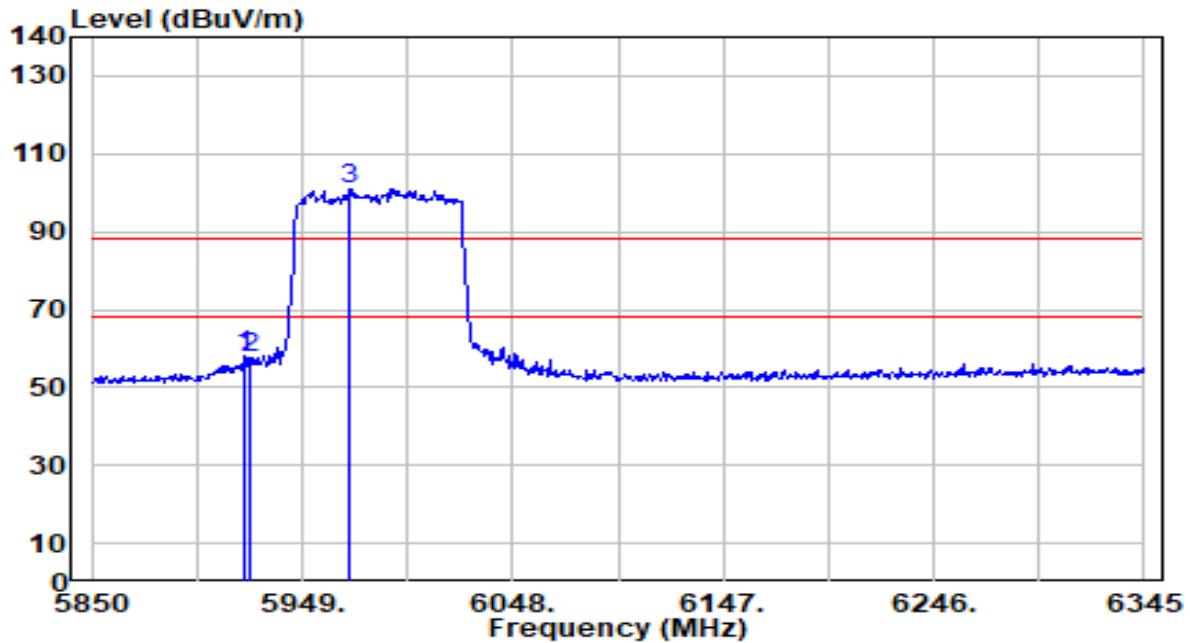


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5921.280        | 57.45          | 0.53       | 57.98                | -30.22      | 88.20          | 200         | 132         | Peak              |
| 2  |   | 5925.000        | 57.22          | 0.53       | 57.75                | -30.45      | 88.20          | 200         | 132         | Peak              |
| 3  |   | 5971.275        | 100.68         | 0.49       | 101.17               | N/A         | N/A            | 200         | 132         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band5_CH 7_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

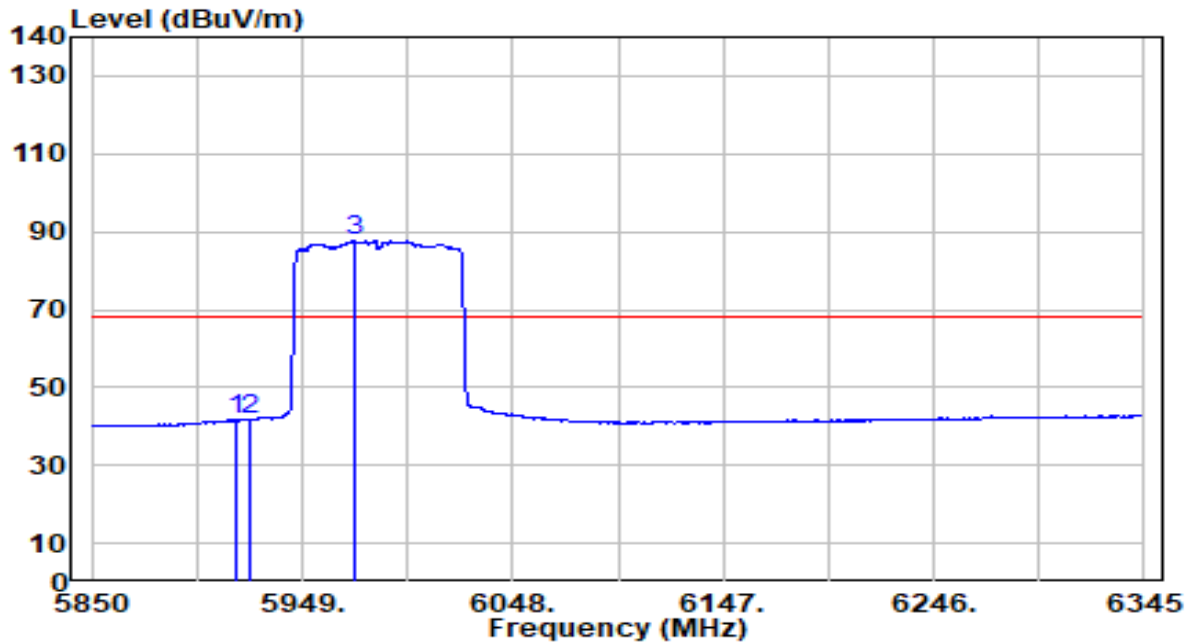


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5917.815        | 41.26          | 0.53       | 41.79                | -26.41      | 68.20          | 200         | 132         | Average           |
| 2  |   | 5925.000        | 41.04          | 0.53       | 41.57                | -26.63      | 68.20          | 200         | 132         | Average           |
| 3  |   | 5973.255        | 87.26          | 0.49       | 87.75                | N/A         | N/A            | 200         | 132         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band5_CH 7_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

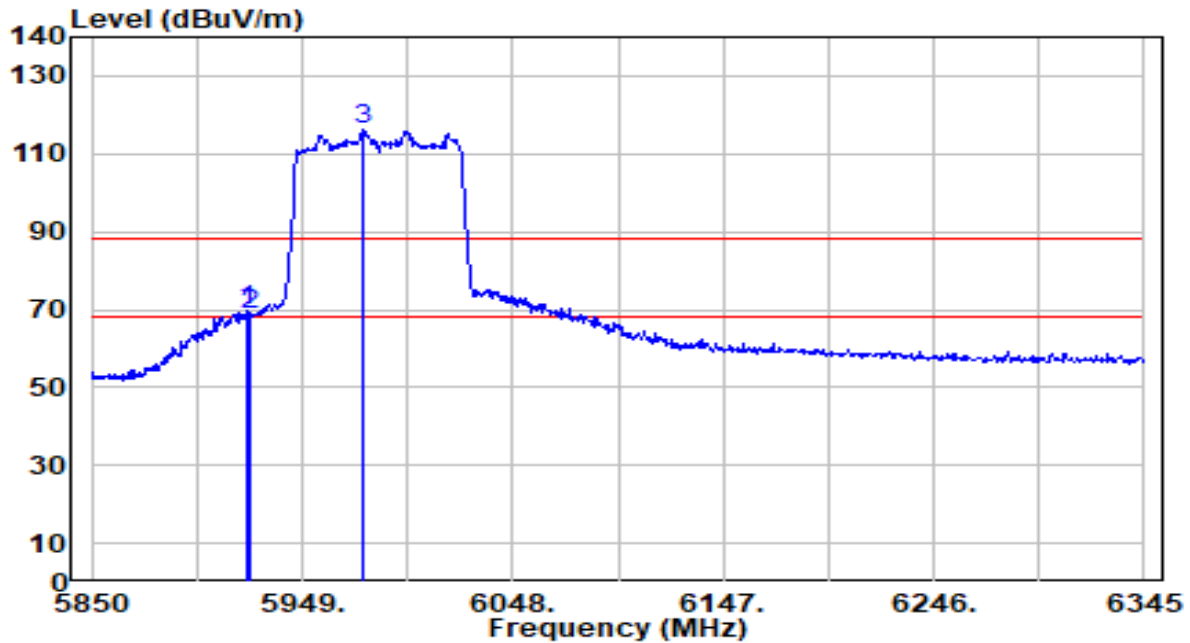


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5922.765      | 69.09          | 0.53       | 69.62                | -18.58      | 88.20          | 200         | 69          | Peak              |
| 2  | 5925.000        | 68.39          | 0.53       | 68.92                | -19.28      | 88.20          | 200         | 69          | Peak              |
| 3  | 5977.710        | 115.56         | 0.49       | 116.05               | N/A         | N/A            | 200         | 69          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band5_CH 7_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

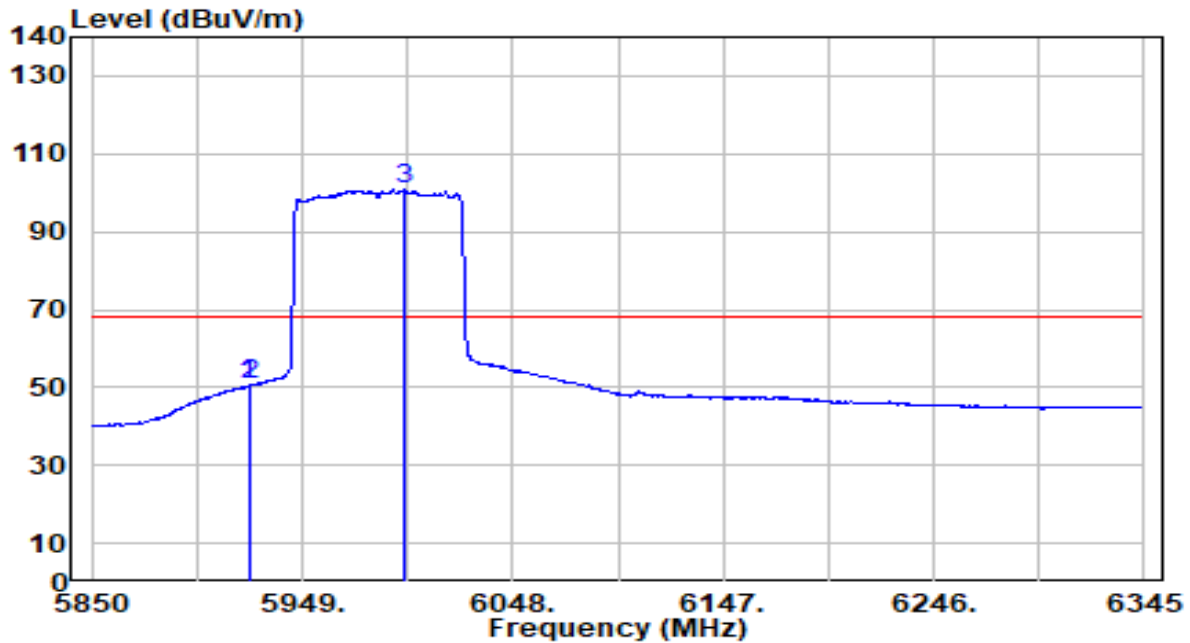


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5923.755        | 50.01          | 0.53       | 50.54                | -17.66      | 68.20          | 200         | 69          | Average           |
| 2  |   | 5925.000        | 49.96          | 0.53       | 50.49                | -17.71      | 68.20          | 200         | 69          | Average           |
| 3  |   | 5996.520        | 100.36         | 0.47       | 100.83               | N/A         | N/A            | 200         | 69          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

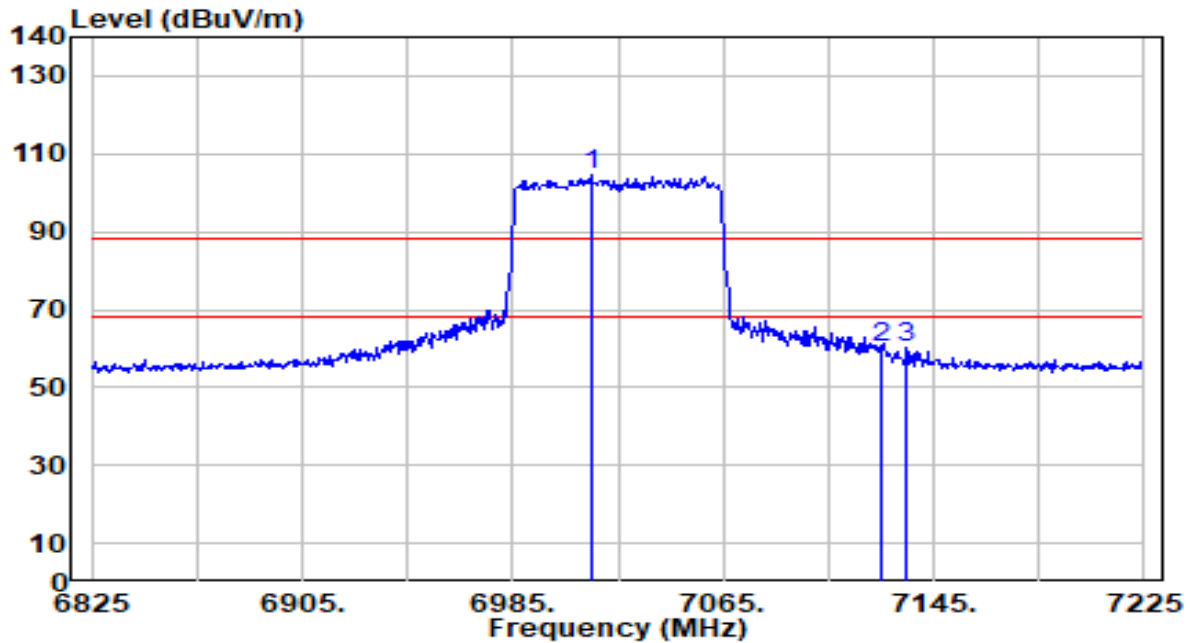


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7014.600        | 100.58         | 3.85       | 104.43               | N/A         | N/A            | 300         | 167         | Peak              |
| 2  | * 7125.000      | 56.19          | 3.88       | 60.07                | -28.13      | 88.20          | 300         | 167         | Peak              |
| 3  | 7134.600        | 56.16          | 3.88       | 60.04                | -28.16      | 88.20          | 300         | 167         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

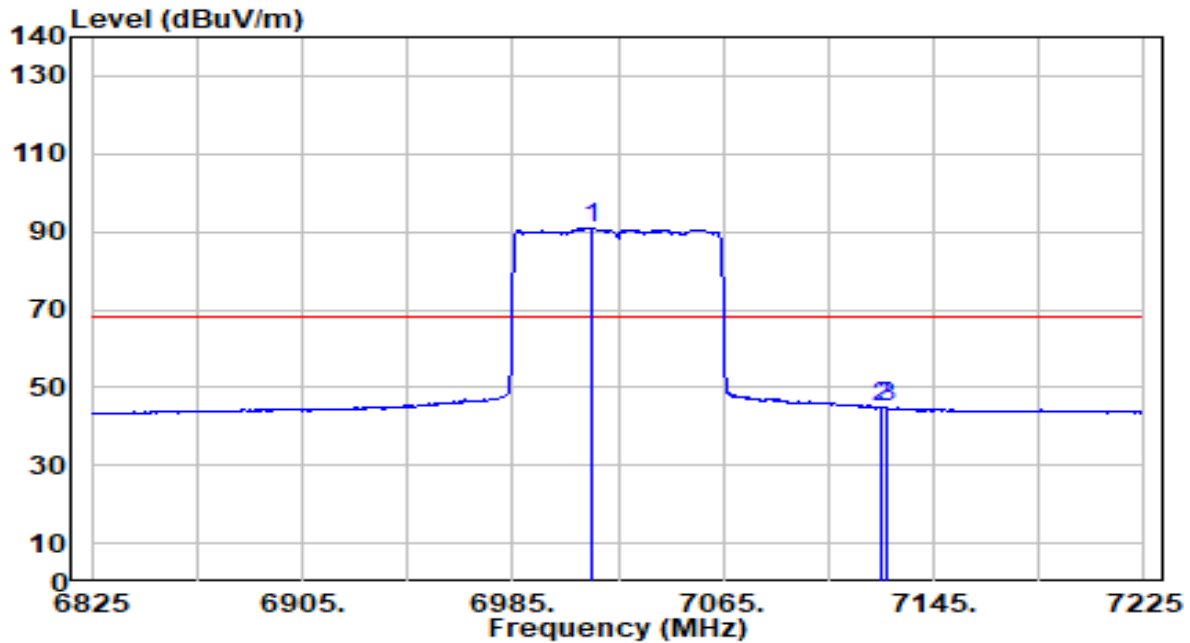


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7015.000        | 87.10          | 3.85       | 90.95                | N/A         | N/A            | 300         | 167         | Average           |
| 2  | * 7125.000      | 41.18          | 3.88       | 45.05                | -23.15      | 68.20          | 300         | 167         | Average           |
| 3  | 7127.400        | 40.89          | 3.88       | 44.76                | -23.44      | 68.20          | 300         | 167         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

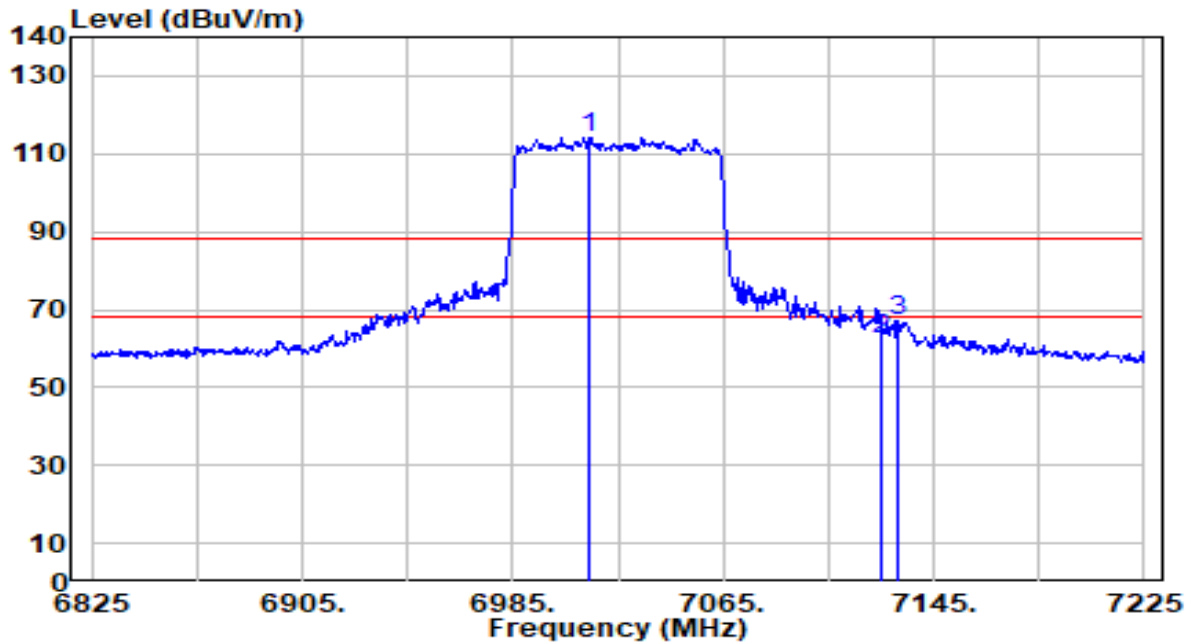


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7014.200        | 110.25         | 3.85       | 114.10               | N/A         | N/A            | 200         | 11          | Peak              |
| 2  | 7125.000        | 58.41          | 3.88       | 62.29                | -25.91      | 88.20          | 200         | 11          | Peak              |
| 3  | * 7131.000      | 63.48          | 3.88       | 67.36                | -20.84      | 88.20          | 200         | 11          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

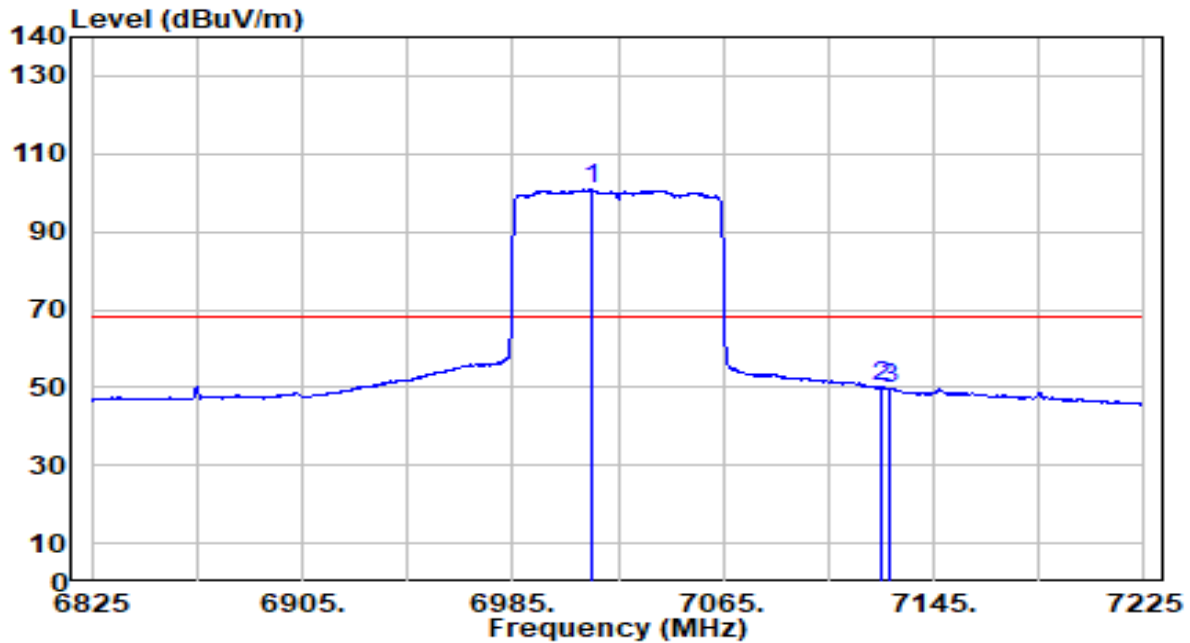


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7014.600        | 96.95          | 3.85       | 100.81               | N/A         | N/A            | 200         | 11          | Average           |
| 2  | * 7125.000      | 46.17          | 3.88       | 50.04                | -18.16      | 68.20          | 200         | 11          | Average           |
| 3  | 7128.200        | 45.87          | 3.88       | 49.75                | -18.45      | 68.20          | 200         | 11          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band5_CH 15_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

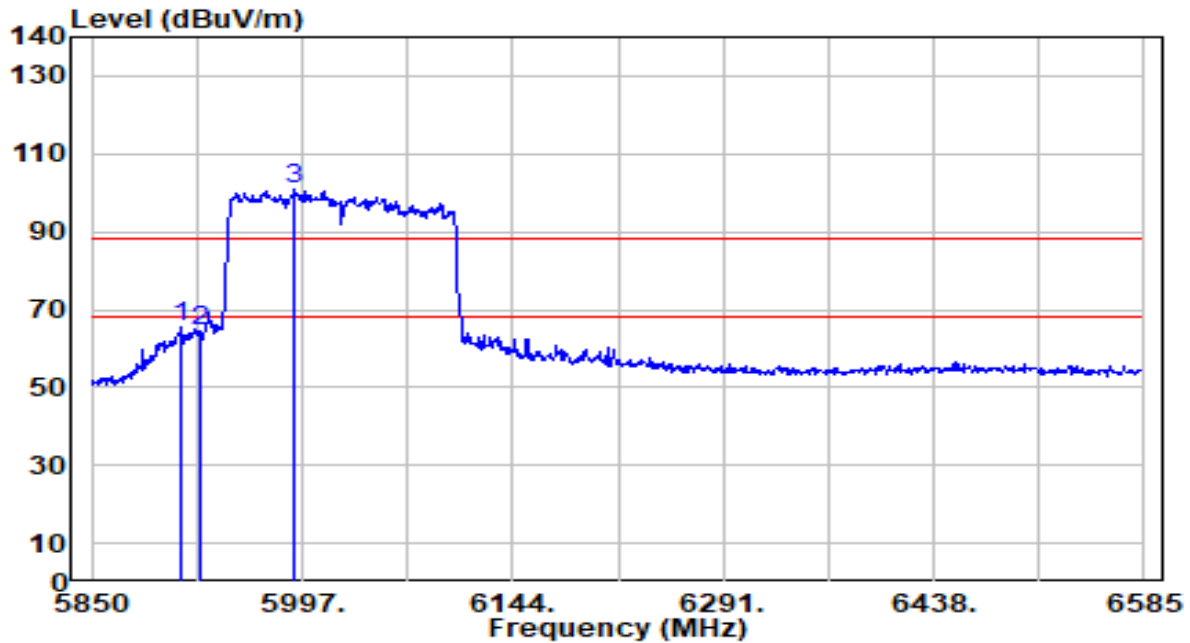


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5912.475        | 64.88          | 0.54       | 65.41                | -22.79      | 88.20          | 200         | 132         | Peak              |
| 2  |   | 5925.000        | 63.98          | 0.53       | 64.51                | -23.69      | 88.20          | 200         | 132         | Peak              |
| 3  |   | 5991.120        | 100.28         | 0.48       | 100.76               | N/A         | N/A            | 200         | 132         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band5_CH 15_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

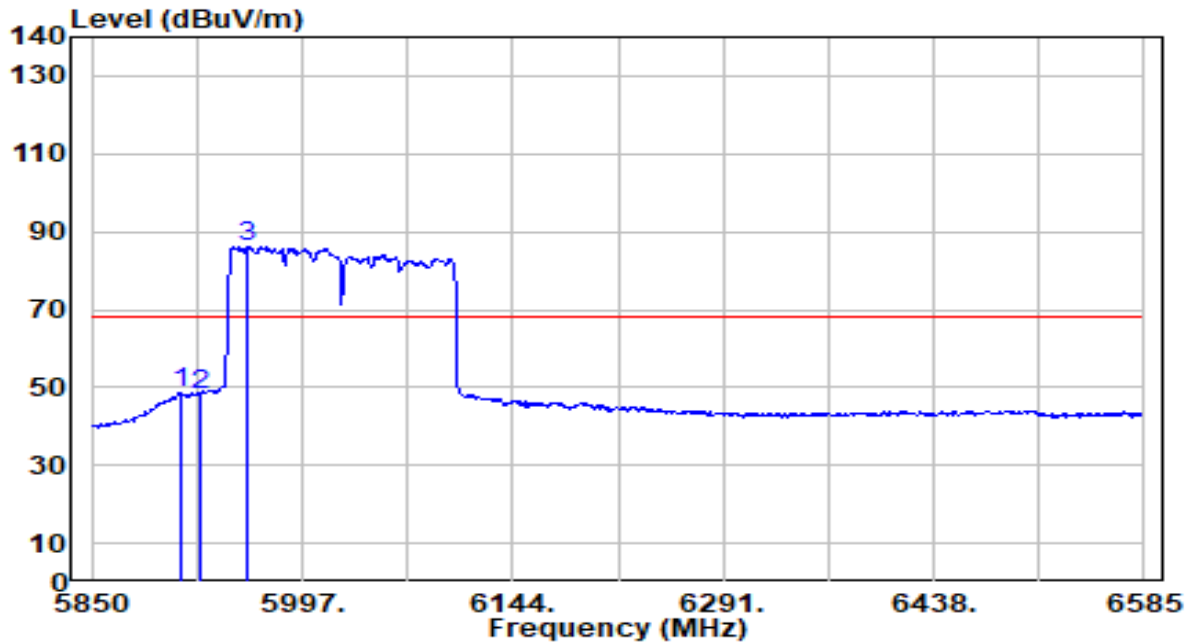


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5912.475        | 48.27          | 0.54       | 48.80                | -19.40      | 68.20          | 200         | 132         | Average           |
| 2  |   | 5925.000        | 47.80          | 0.53       | 48.33                | -19.87      | 68.20          | 200         | 132         | Average           |
| 3  |   | 5958.780        | 85.79          | 0.50       | 86.29                | N/A         | N/A            | 200         | 132         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band5_CH 15_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

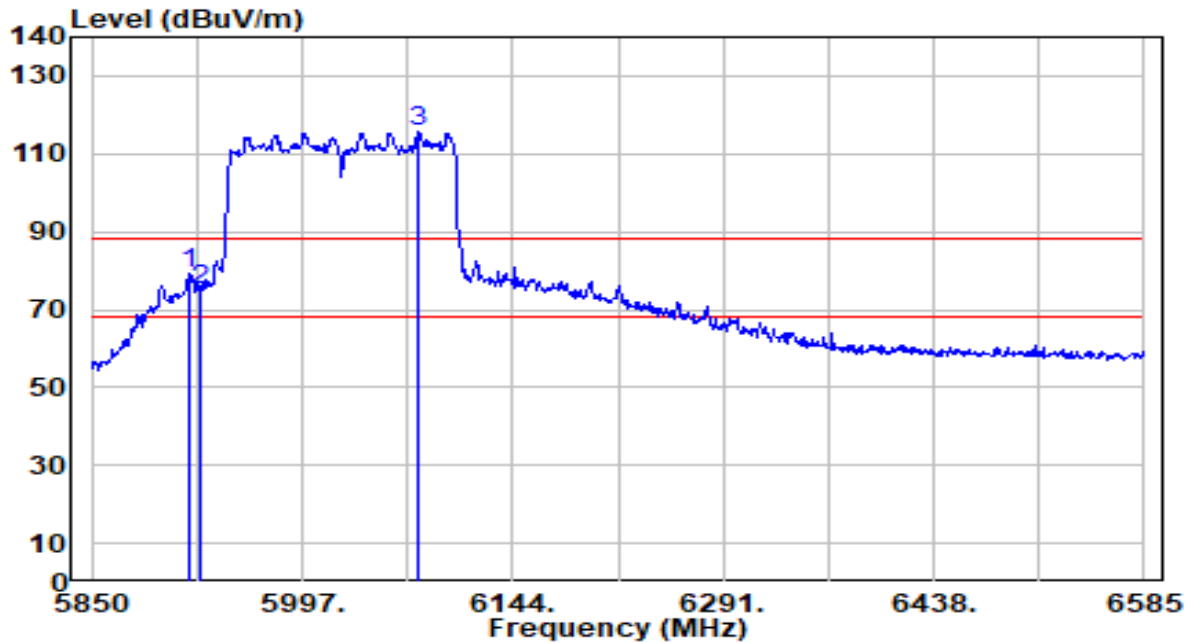


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 5918.355           | 78.66             | 0.53          | 79.19                   | -9.01          | 88.20             | 200            | 70             | Peak                 |
| 2  |   | 5925.000           | 74.33             | 0.53          | 74.85                   | -13.35         | 88.20             | 200            | 70             | Peak                 |
| 3  |   | 6077.115           | 114.62            | 0.87          | 115.49                  | N/A            | N/A               | 200            | 70             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band5_CH 15_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

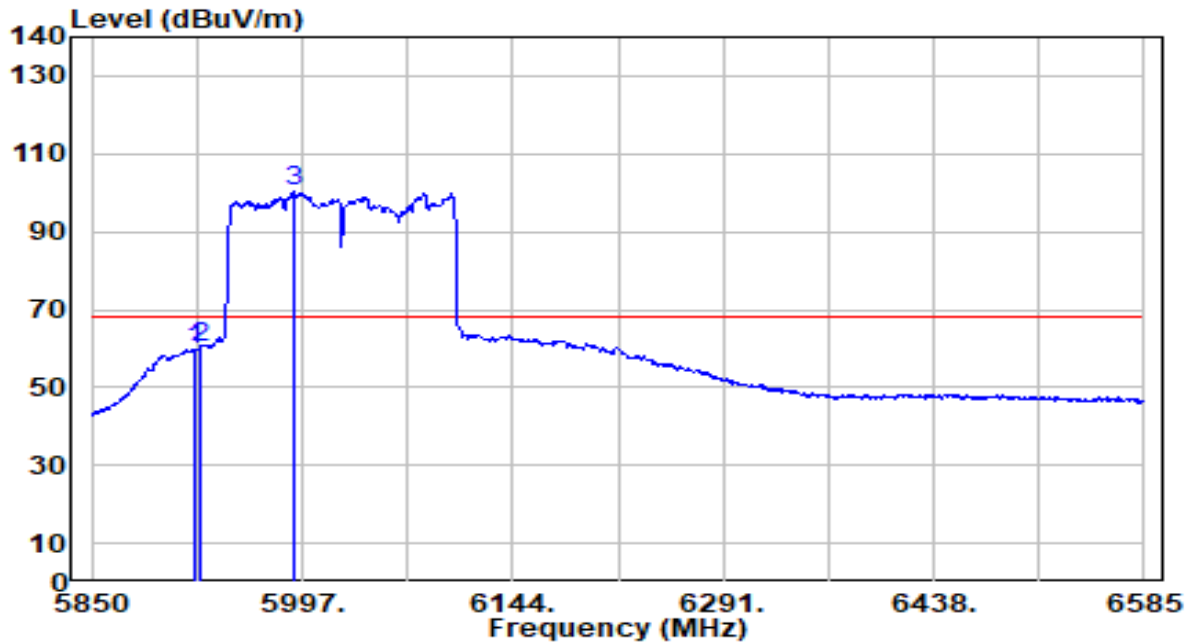


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5922.765        | 59.43          | 0.53       | 59.96                | -8.24       | 68.20          | 200         | 70          | Average           |
| 2  | * 5925.000      | 59.90          | 0.53       | 60.43                | -7.77       | 68.20          | 200         | 70          | Average           |
| 3  | 5991.855        | 99.68          | 0.48       | 100.15               | N/A         | N/A            | 200         | 70          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

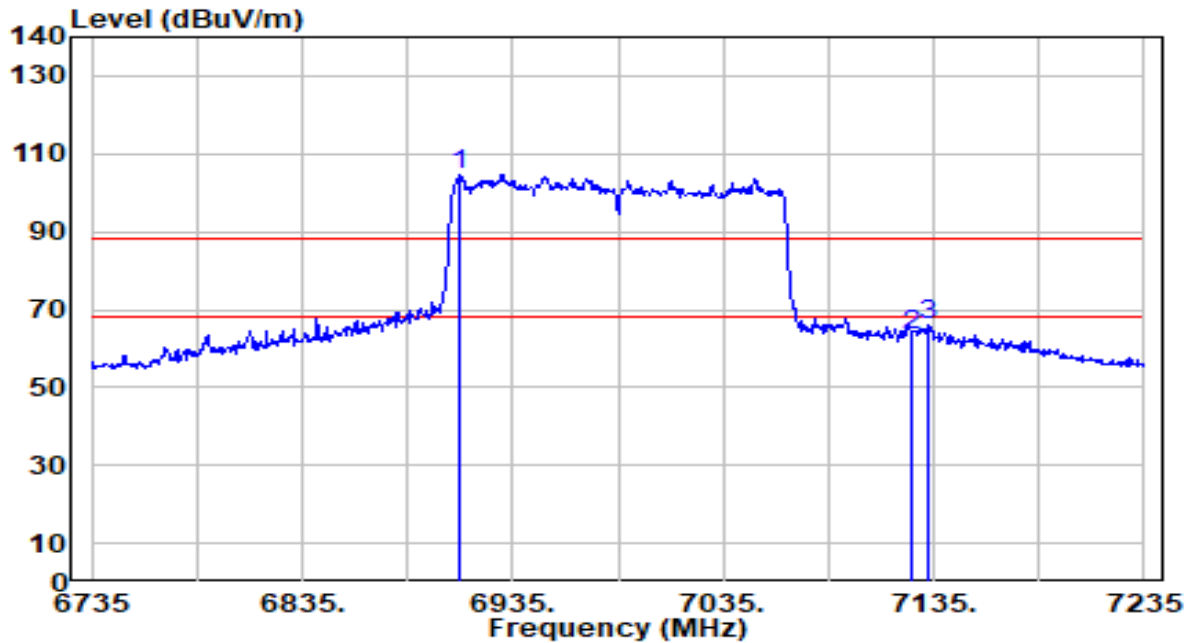


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 6910.000        | 100.81         | 3.82       | 104.63               | N/A         | N/A            | 300         | 47          | Peak              |
| 2  | 7125.000        | 59.74          | 3.88       | 63.62                | -24.58      | 88.20          | 300         | 47          | Peak              |
| 3  | * 7132.500      | 62.36          | 3.88       | 66.24                | -21.96      | 88.20          | 300         | 47          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

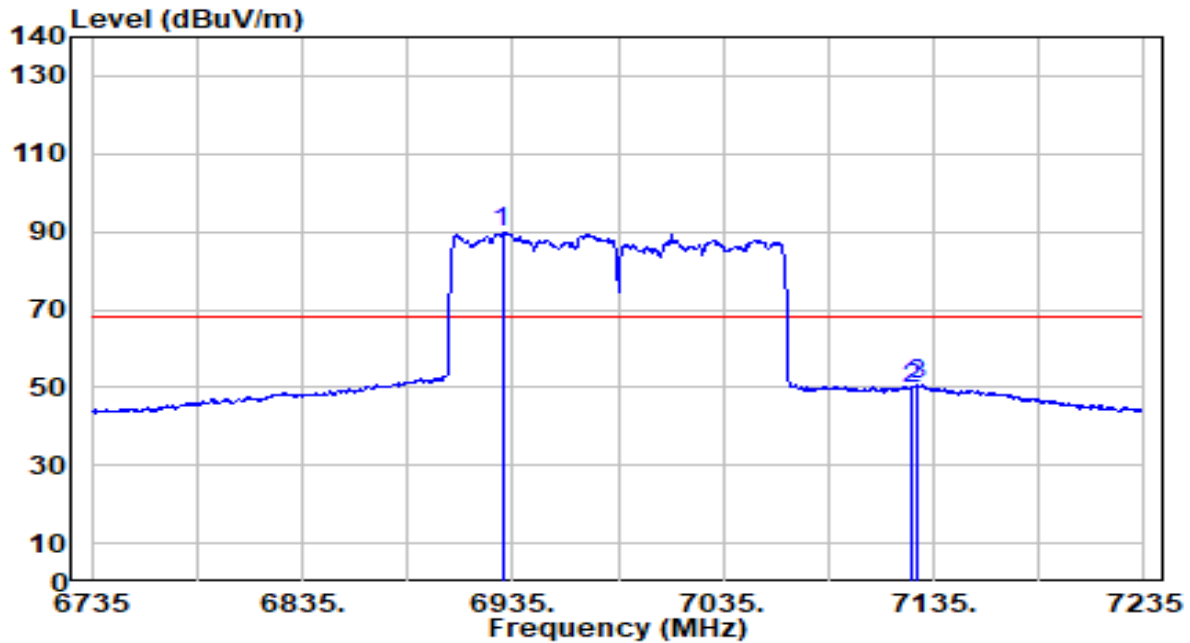


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 6930.000        | 85.92          | 3.83       | 89.75                | N/A         | N/A            | 300         | 47          | Average           |
| 2  | 7125.000        | 45.82          | 3.88       | 49.70                | -18.50      | 68.20          | 300         | 47          | Average           |
| 3  | * 7127.000      | 46.69          | 3.88       | 50.57                | -17.63      | 68.20          | 300         | 47          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

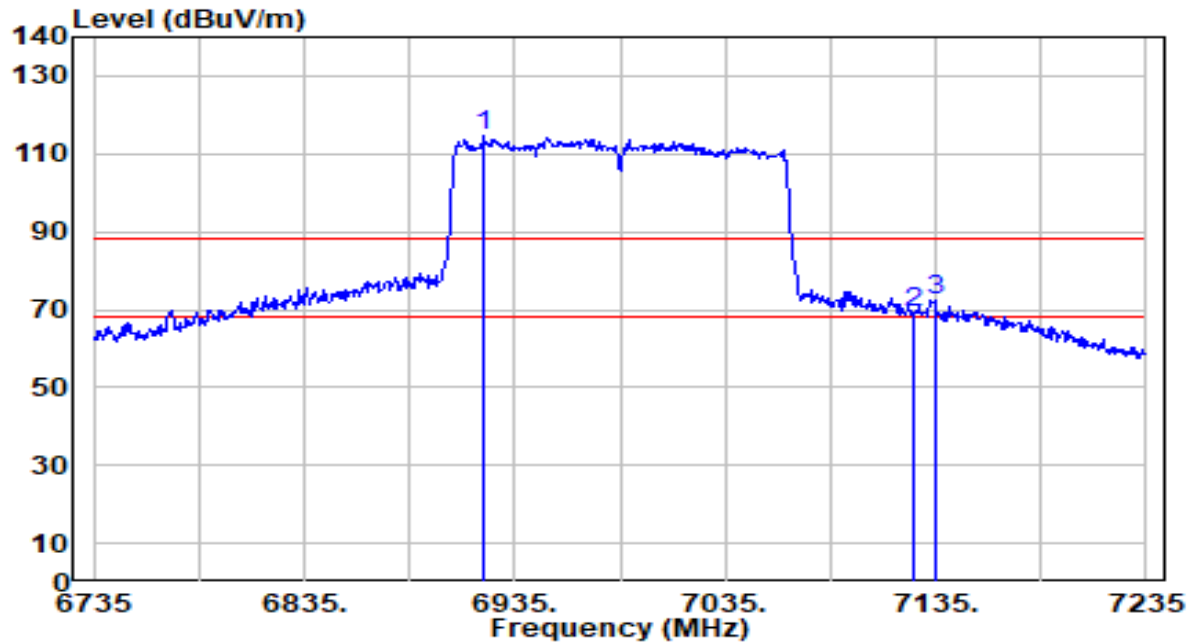


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 6920.500        | 110.93         | 3.82       | 114.76               | N/A         | N/A            | 200         | 243         | Peak              |
| 2  | 7125.000        | 65.48          | 3.88       | 69.36                | -18.84      | 88.20          | 200         | 243         | Peak              |
| 3  | * 7134.500      | 68.69          | 3.88       | 72.57                | -15.63      | 88.20          | 200         | 243         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

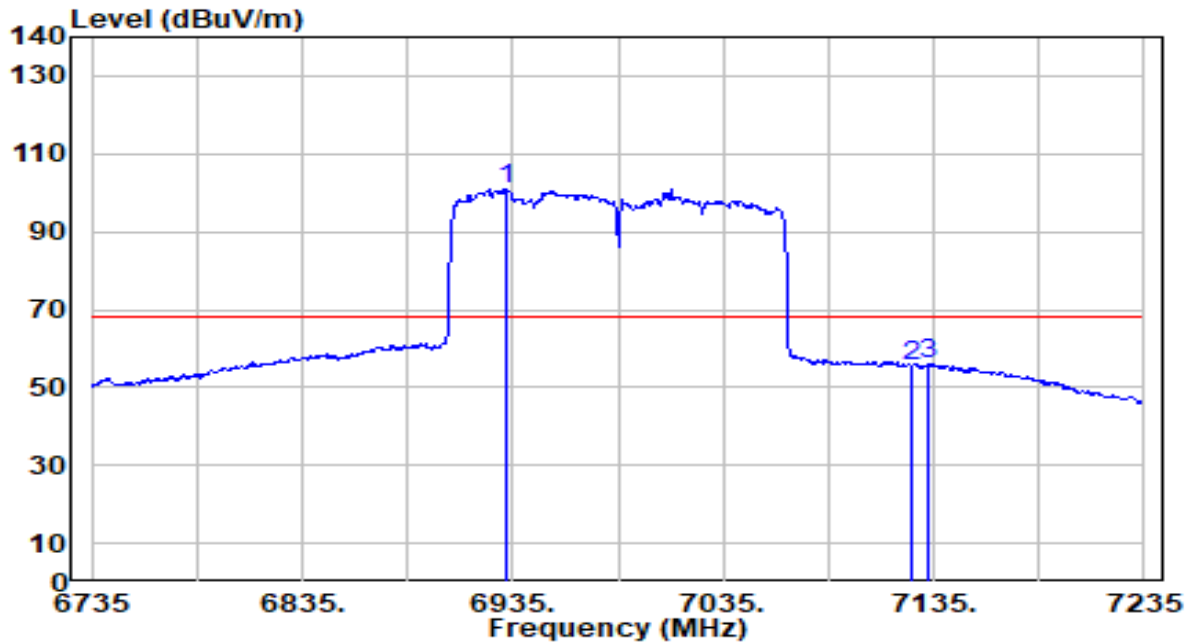


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 6932.000        | 96.98          | 3.83       | 100.81               | N/A         | N/A            | 200         | 243         | Average           |
| 2  | 7125.000        | 51.71          | 3.88       | 55.59                | -12.61      | 68.20          | 200         | 243         | Average           |
| 3  | * 7132.000      | 52.32          | 3.88       | 56.20                | -12.00      | 68.20          | 200         | 243         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band5_CH 31_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

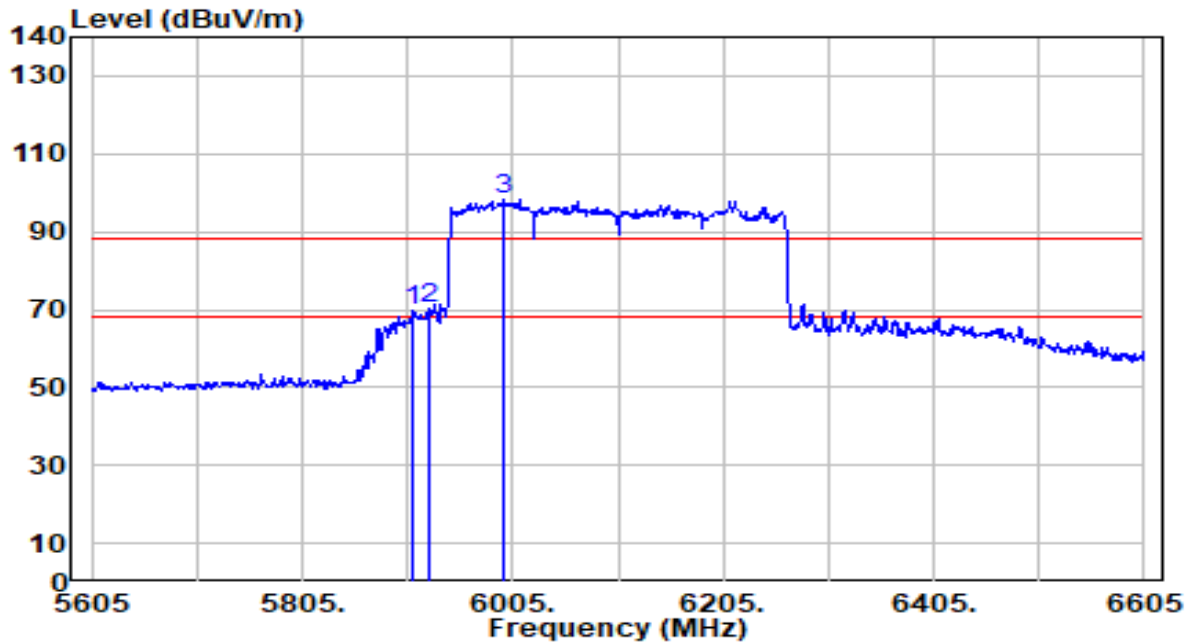


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5911.000        | 69.09          | 0.54       | 69.62                | -18.58      | 88.20          | 300         | 113         | Peak              |
| 2  | * 5925.000      | 69.81          | 0.53       | 70.34                | -17.86      | 88.20          | 300         | 113         | Peak              |
| 3  | 5996.000        | 97.72          | 0.47       | 98.19                | N/A         | N/A            | 300         | 113         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band5_CH 31_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

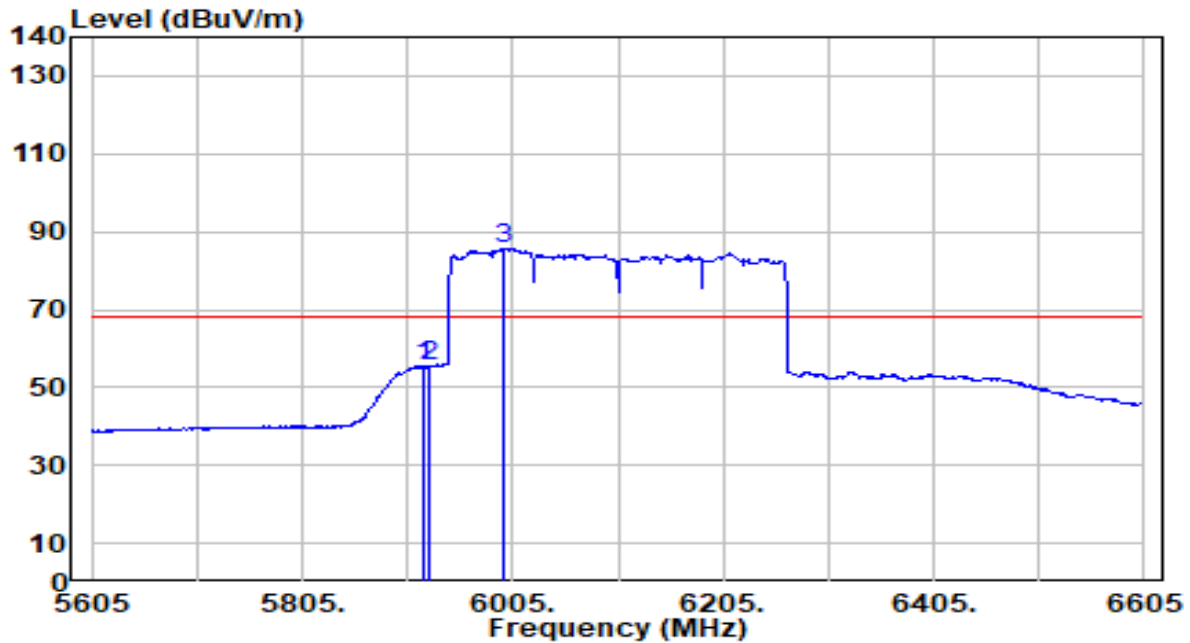


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5920.000        | 55.09          | 0.53       | 55.62                | -12.58      | 68.20          | 300         | 113         | Average           |
| 2  |   | 5925.000        | 54.73          | 0.53       | 55.26                | -12.94      | 68.20          | 300         | 113         | Average           |
| 3  |   | 5996.000        | 85.22          | 0.47       | 85.69                | N/A         | N/A            | 300         | 113         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band5_CH 31_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

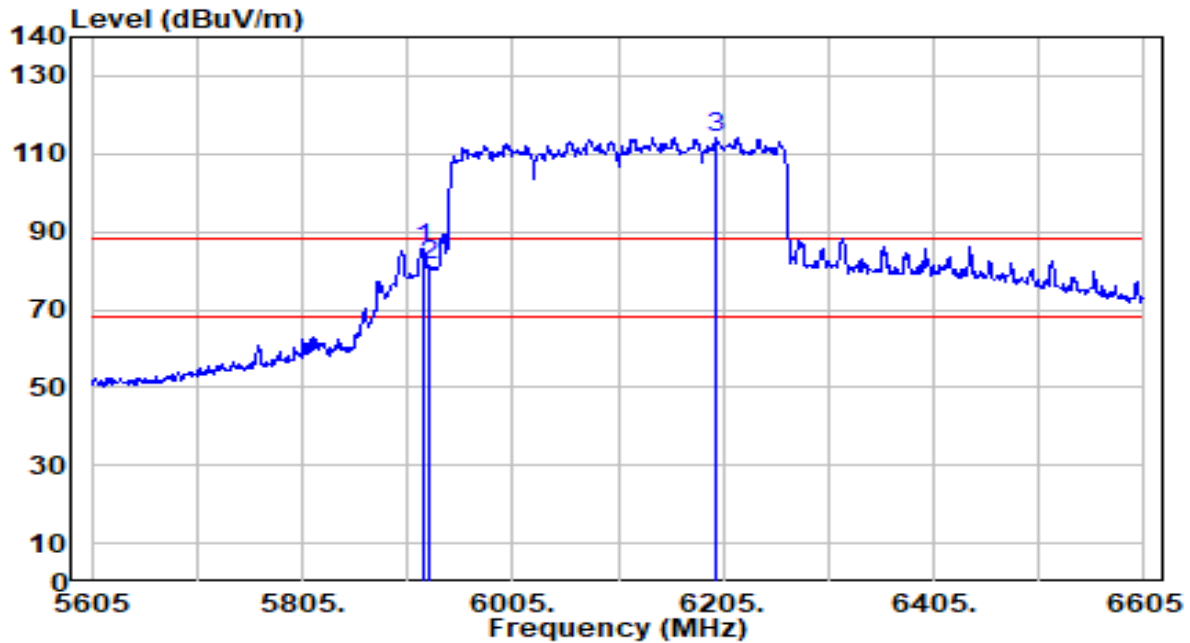


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5920.000        | 84.97          | 0.53       | 85.50                | -2.70       | 88.20          | 200         | 70          | Peak              |
| 2  |   | 5925.000        | 80.59          | 0.53       | 81.12                | -7.08       | 88.20          | 200         | 70          | Peak              |
| 3  |   | 6198.000        | 112.83         | 1.51       | 114.34               | N/A         | N/A            | 200         | 70          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router              | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band5_CH 31_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

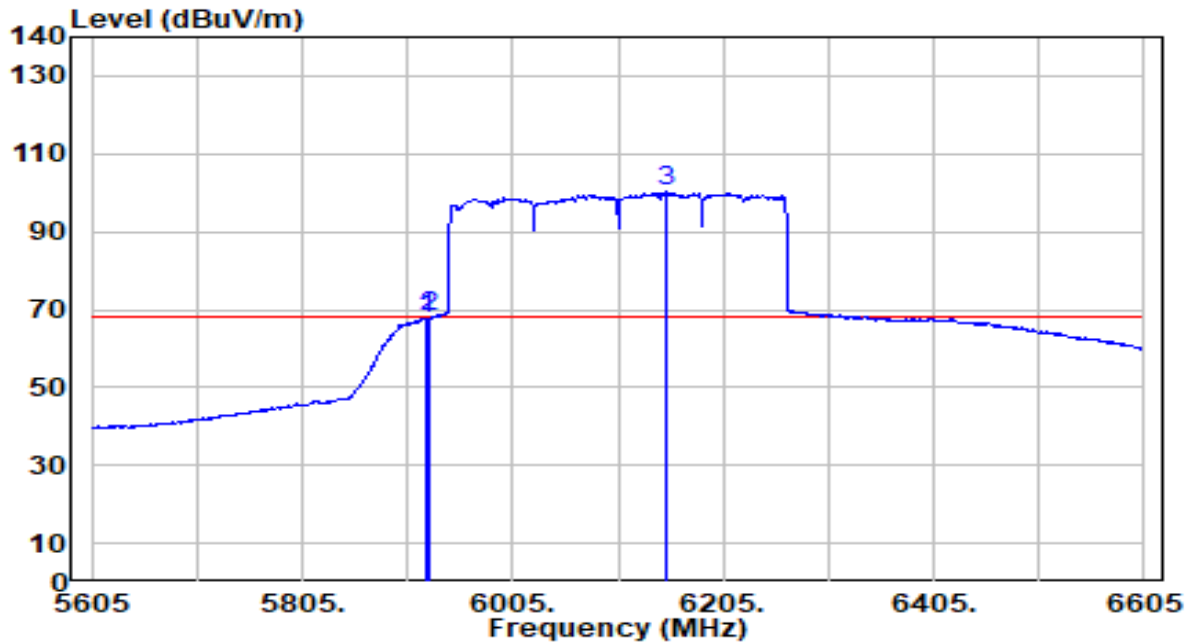


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5923.000        | 67.29          | 0.53       | 67.82                | -0.38       | 68.20          | 200         | 70          | Average           |
| 2  | * 5925.000      | 67.49          | 0.53       | 68.01                | -0.19       | 68.20          | 200         | 70          | Average           |
| 3  | 6152.000        | 99.13          | 1.26       | 100.39               | N/A         | N/A            | 200         | 70          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band8_CH 191_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

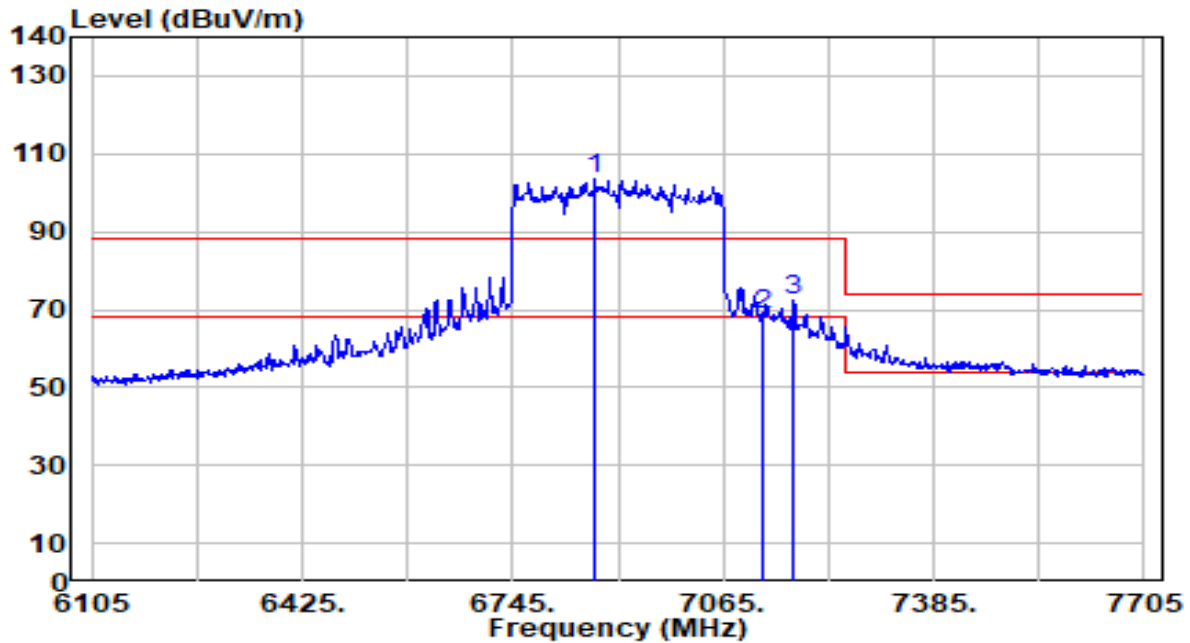


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 6869.800        | 99.97          | 3.81       | 103.78               | N/A         | N/A            | 305         | 48          | Peak              |
| 2  | 7125.000        | 64.73          | 3.88       | 68.61                | -19.59      | 88.20          | 305         | 48          | Peak              |
| 3  | * 7172.200      | 68.51          | 3.89       | 72.40                | -15.80      | 88.20          | 305         | 48          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Horizontal                                     | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band8_CH 191_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

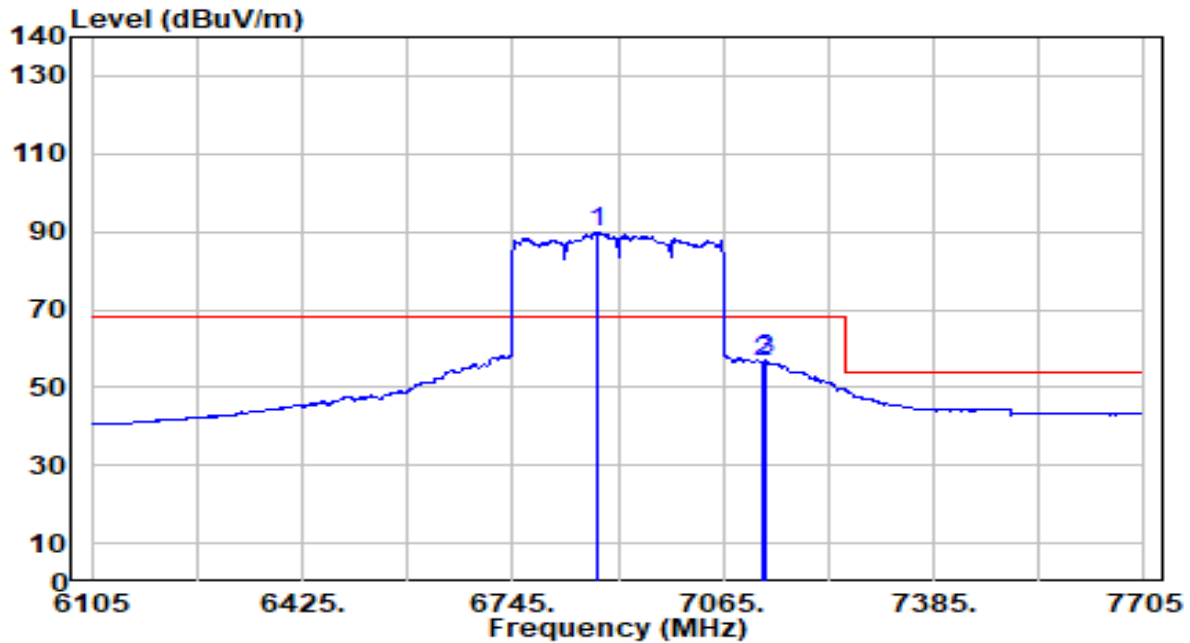


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 6874.600        | 85.96          | 3.81       | 89.77                | N/A         | N/A            | 305         | 48          | Average           |
| 2  | 7125.000        | 52.48          | 3.88       | 56.36                | -11.84      | 68.20          | 305         | 48          | Average           |
| 3  | * 7129.000      | 53.05          | 3.88       | 56.93                | -11.27      | 68.20          | 305         | 48          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band8_CH 191_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

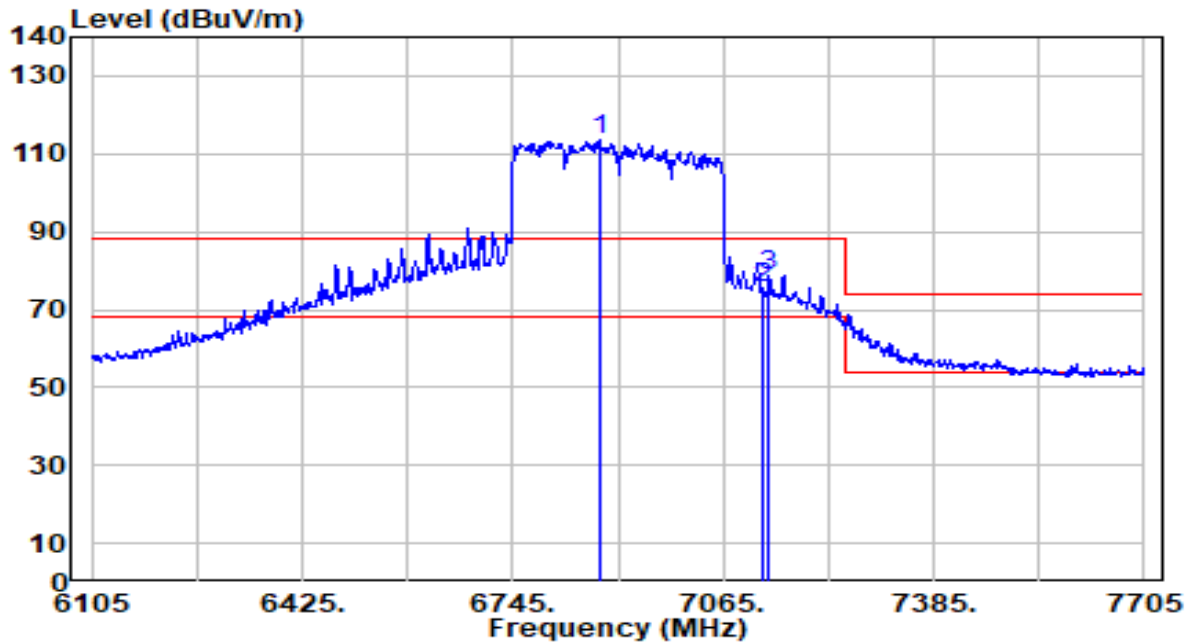


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 6876.200        | 109.85         | 3.81       | 113.66               | N/A         | N/A            | 200         | 57          | Peak              |
| 2  | 7125.000        | 71.81          | 3.88       | 75.68                | -12.52      | 88.20          | 200         | 57          | Peak              |
| 3  | * 7135.400      | 74.94          | 3.88       | 78.82                | -9.38       | 88.20          | 200         | 57          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                |                      |              |
|-----------|------------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router               | Date of Test         | 2023-09-19   |
| Factor    | DRH18-E                                        | Temp. / Humidity     | 20°C /62%    |
| Polarity  | Vertical                                       | Site / Test Engineer | AC2 / Marvin |
| Test Mode | 802.11be-320MHz_TX_Band8_CH 191_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

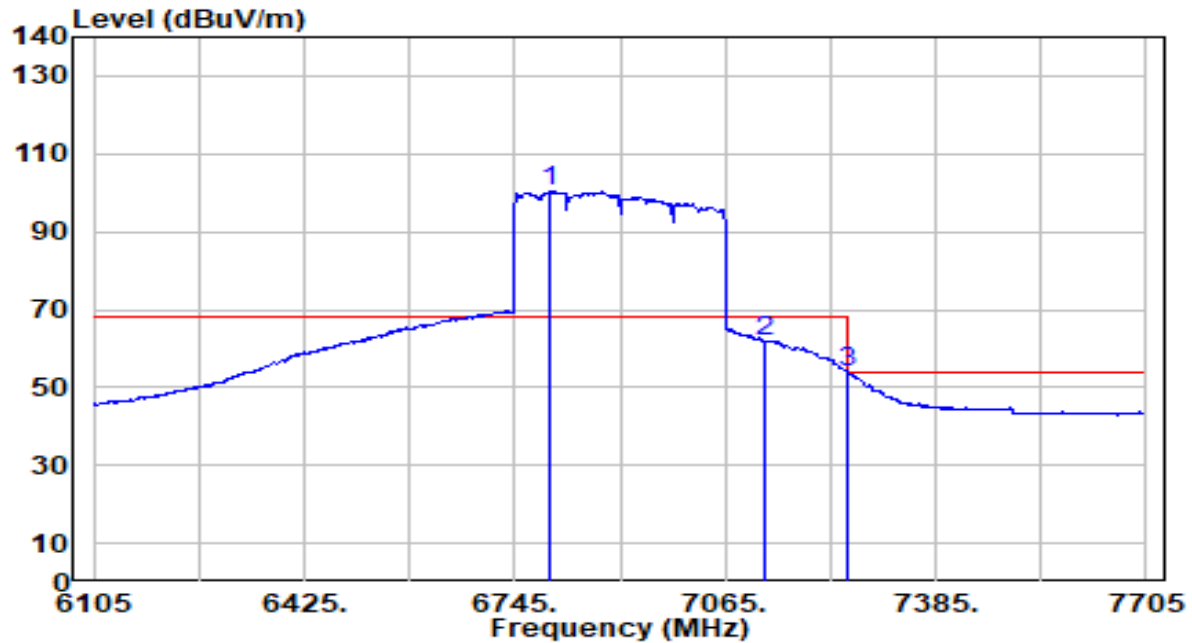

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 6799.400        | 96.40          | 3.78       | 100.18               | N/A         | N/A            | 200         | 57          | Average           |
| 2  | 7125.000        | 57.91          | 3.88       | 61.79                | -6.41       | 68.20          | 200         | 57          | Average           |
| 3  | * 7252.000      | 49.99          | 3.91       | 53.90                | -0.10       | 54.00          | 200         | 57          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 6.10. AC Conducted Emissions


### 6.10.1. Test Limit

| FCC Part 15.207 Limits |           |           |
|------------------------|-----------|-----------|
| Frequency (MHz)        | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50            | 66 - 56   | 56 - 46   |
| 0.50 - 5.0             | 56        | 46        |
| 5.0 - 30               | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.10.2. Test Setup

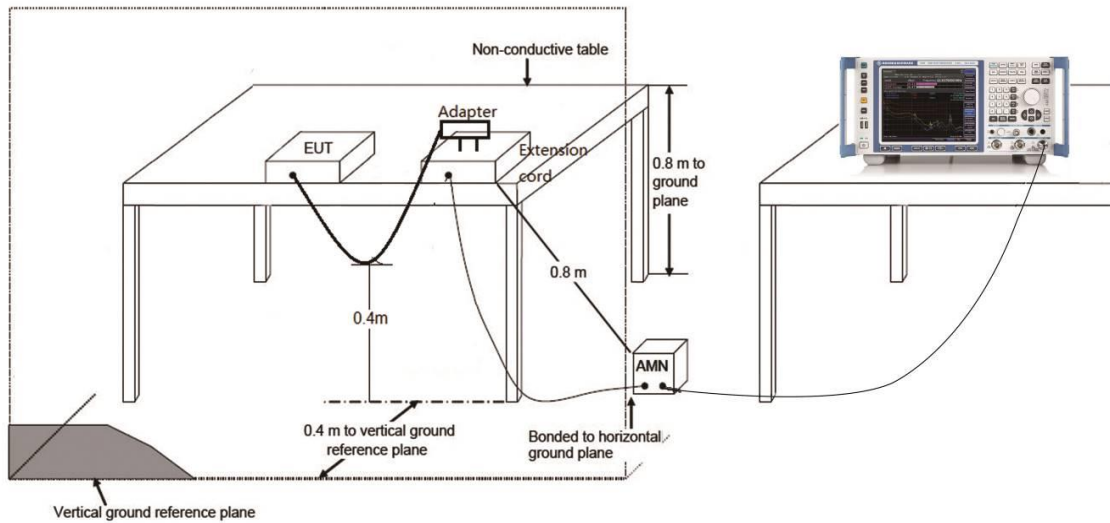

### 6.10.3. Test Result

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-22   |
| Factor    | CE_ENV216-L1 (Filter ON)                    | Temp. / Humidity     | 25.4°C /51%  |
| Polarity  | Line1                                       | Site / Test Engineer | SR2 / Bob    |
| Test Mode | 802.11ax-20MHz_Band5_TX_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

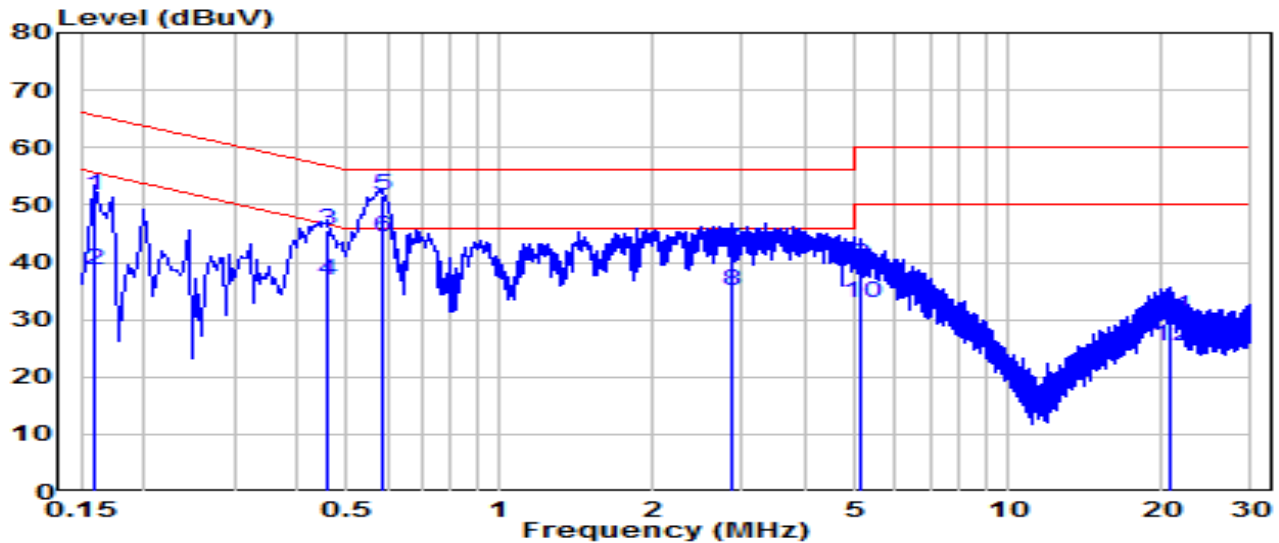


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | 0.159           | 42.01          | 9.62     | 51.63              | -13.89      | 65.52        | QP                |
| 2  | 0.159           | 29.03          | 9.62     | 38.65              | -16.86      | 55.52        | Average           |
| 3  | 0.460           | 35.92          | 9.64     | 45.56              | -11.13      | 56.68        | QP                |
| 4  | 0.460           | 27.22          | 9.64     | 36.86              | -9.83       | 46.68        | Average           |
| 5  | * 0.586         | 41.88          | 9.65     | 51.53              | -4.47       | 56.00        | QP                |
| 6  | * 0.586         | 34.88          | 9.65     | 44.52              | -1.48       | 46.00        | Average           |
| 7  | 2.859           | 32.68          | 9.71     | 42.38              | -13.62      | 56.00        | QP                |
| 8  | 2.859           | 25.33          | 9.71     | 35.04              | -10.96      | 46.00        | Average           |
| 9  | 5.135           | 29.88          | 9.75     | 39.63              | -20.37      | 60.00        | QP                |
| 10 | 5.135           | 23.20          | 9.75     | 32.95              | -17.05      | 50.00        | Average           |
| 11 | 20.884          | 20.66          | 9.93     | 30.59              | -29.42      | 60.00        | QP                |
| 12 | 20.884          | 15.56          | 9.93     | 25.49              | -24.51      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-22   |
| Factor    | CE_ENV216-N (Filter ON)                     | Temp. / Humidity     | 25.4°C /51%  |
| Polarity  | Neutral                                     | Site / Test Engineer | SR2 / Bob    |
| Test Mode | 802.11ax-20MHz_Band5_TX_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

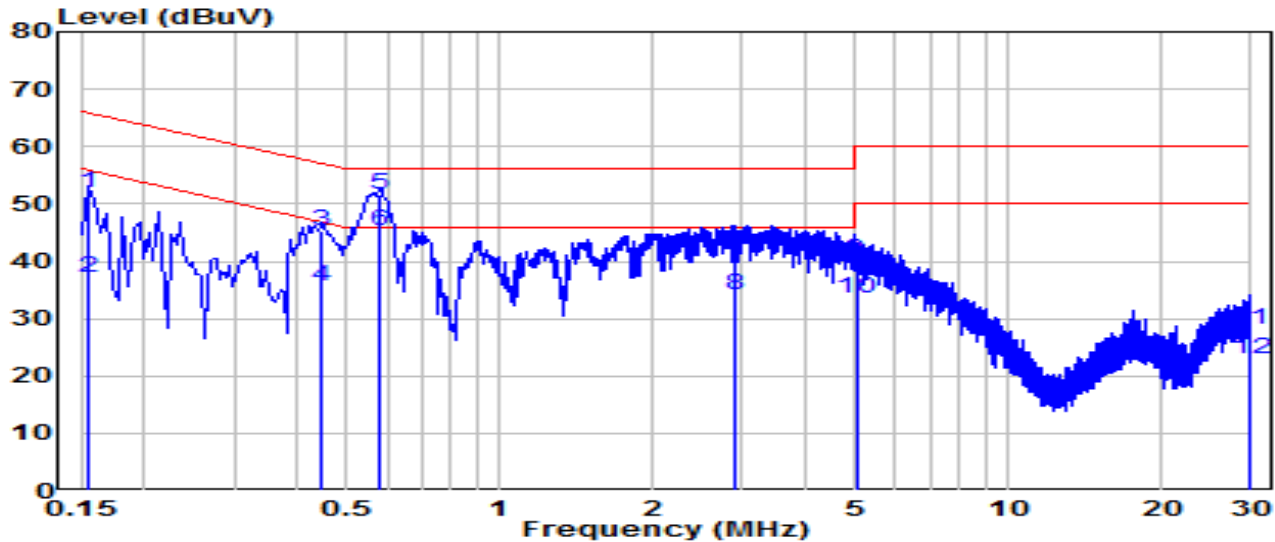


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | 0.154           | 42.31          | 9.62     | 51.93              | -13.82      | 65.75        | QP                |
| 2  | 0.154           | 27.47          | 9.62     | 37.09              | -18.66      | 55.75        | Average           |
| 3  | 0.447           | 35.54          | 9.64     | 45.17              | -11.76      | 56.93        | QP                |
| 4  | 0.447           | 25.90          | 9.64     | 35.54              | -11.39      | 46.93        | Average           |
| 5  | * 0.582         | 42.12          | 9.65     | 51.76              | -4.24       | 56.00        | QP                |
| 6  | * 0.582         | 35.50          | 9.65     | 45.15              | -0.85       | 46.00        | Average           |
| 7  | 2.890           | 31.94          | 9.71     | 41.65              | -14.35      | 56.00        | QP                |
| 8  | 2.890           | 24.42          | 9.71     | 34.13              | -11.87      | 46.00        | Average           |
| 9  | 5.019           | 30.39          | 9.75     | 40.14              | -19.86      | 60.00        | QP                |
| 10 | 5.019           | 23.74          | 9.75     | 33.49              | -16.51      | 50.00        | Average           |
| 11 | 29.784          | 18.04          | 10.06    | 28.10              | -31.90      | 60.00        | QP                |
| 12 | 29.784          | 12.97          | 10.06    | 23.03              | -26.97      | 50.00        | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-22   |
| Factor    | CE_ENV216-L1 (Filter ON)                    | Temp. / Humidity     | 25.4°C /51%  |
| Polarity  | Line1                                       | Site / Test Engineer | SR2 / Bob    |
| Test Mode | 802.11ax-20MHz_Band5_TX_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 240V/60Hz |

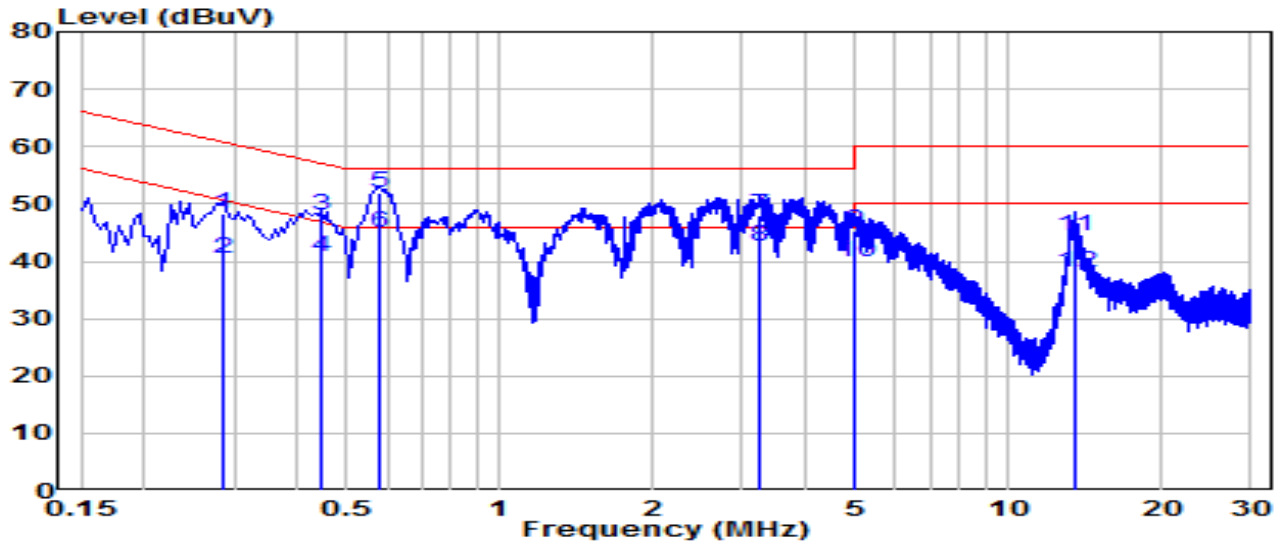


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | 0.285           | 38.73          | 9.63     | 48.36              | -12.31      | 60.67        | QP                |
| 2  | 0.285           | 30.80          | 9.63     | 40.42              | -10.25      | 50.67        | Average           |
| 3  | 0.447           | 38.23          | 9.64     | 47.87              | -9.06       | 56.93        | QP                |
| 4  | 0.447           | 31.08          | 9.64     | 40.72              | -6.21       | 46.93        | Average           |
| 5  | * 0.577         | 42.15          | 9.65     | 51.80              | -4.20       | 56.00        | QP                |
| 6  | * 0.577         | 35.21          | 9.65     | 44.85              | -1.15       | 46.00        | Average           |
| 7  | 3.250           | 38.18          | 9.72     | 47.90              | -8.10       | 56.00        | QP                |
| 8  | 3.250           | 32.78          | 9.72     | 42.49              | -3.51       | 46.00        | Average           |
| 9  | 5.014           | 35.50          | 9.75     | 45.25              | -14.75      | 60.00        | QP                |
| 10 | 5.014           | 29.99          | 9.75     | 39.74              | -10.26      | 50.00        | Average           |
| 11 | 13.478          | 34.44          | 9.88     | 44.32              | -15.68      | 60.00        | QP                |
| 12 | 13.478          | 28.12          | 9.88     | 38.01              | -11.99      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE24000 Quad-Band Wi-Fi 7 Router            | Date of Test         | 2023-09-22   |
| Factor    | CE_ENV216-N (Filter ON)                     | Temp. / Humidity     | 25.4°C /51%  |
| Polarity  | Neutral                                     | Site / Test Engineer | SR2 / Bob    |
| Test Mode | 802.11ax-20MHz_Band5_TX_CH 1_ANT<br>0+1+2+3 | Test Voltage         | AC 240V/60Hz |

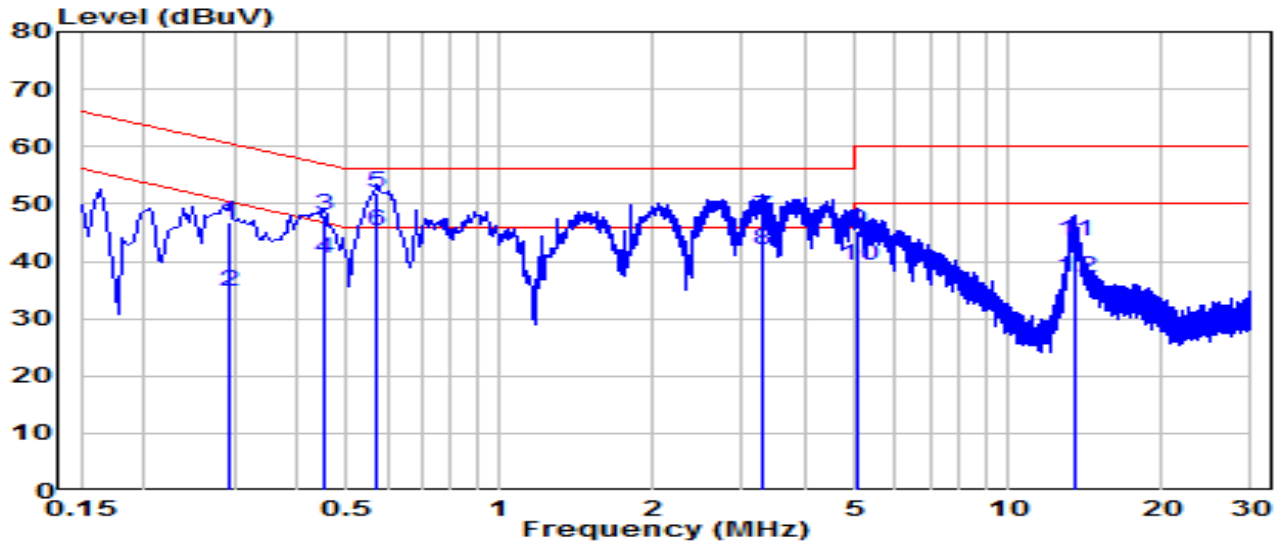

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | 0.294           | 37.21          | 9.63     | 46.83              | -13.58      | 60.41        | QP                |
| 2  | 0.294           | 24.97          | 9.63     | 34.60              | -15.81      | 50.41        | Average           |
| 3  | 0.451           | 38.38          | 9.64     | 48.01              | -8.83       | 56.85        | QP                |
| 4  | 0.451           | 30.72          | 9.64     | 40.35              | -6.49       | 46.85        | Average           |
| 5  | * 0.573         | 42.34          | 9.65     | 51.99              | -4.01       | 56.00        | QP                |
| 6  | * 0.573         | 35.64          | 9.65     | 45.29              | -0.71       | 46.00        | Average           |
| 7  | 3.295           | 37.97          | 9.72     | 47.69              | -8.31       | 56.00        | QP                |
| 8  | 3.295           | 32.13          | 9.72     | 41.85              | -4.15       | 46.00        | Average           |
| 9  | 5.055           | 35.42          | 9.75     | 45.17              | -14.83      | 60.00        | QP                |
| 10 | 5.055           | 29.60          | 9.75     | 39.35              | -10.65      | 50.00        | Average           |
| 11 | 13.523          | 33.65          | 9.91     | 43.56              | -16.44      | 60.00        | QP                |
| 12 | 13.523          | 27.33          | 9.91     | 37.25              | -12.75      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

## 7. Conclusion

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC rules.

**Appendix A : Test Setup Photograph**

Refer to "2308TW0121-UT" file.

**Appendix B : External Photograph**

Refer to "2308TW0121-UE" file.

**Appendix C : Internal Photograph**

Refer to "2308TW0121-UI" file.

---

 The End 

---