



FCC TEST REPORT

For
Duracell U.S. Operations, Inc.
Portable Power Station
Test Model: MCA92W-055Wh

Prepared for : Duracell U.S. Operations, Inc.
Address : Berkshire Corporate Park 14 Research Drive. Bethel. CT 06801

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 15, 2024
Number of tested samples : 2
Sample No. : A240415039-1, A240415039-2
Serial number : Prototype
Date of Test : April 15, 2024 ~ April 27, 2024
Date of Report : April 28, 2024



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC TEST REPORT
FCC CFR 47 PART 15C****Report Reference No.** : LCSA04154028EA**Date Of Issue** : April 28, 2024**Testing Laboratory Name** : Shenzhen LCS Compliance Testing Laboratory Ltd.**Address** : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China**Testing Location/ Procedure** : Full application of Harmonised standards ☒Partial application of Harmonised standards ☐Other standard testing method ☐**Applicant's Name** : Duracell U.S. Operations, Inc.**Address** : Berkshire Corporate Park 14 Research Drive. Bethel. CT 06801**Test Specification****Standard** : FCC CFR 47 PART 15C**Test Report Form No.** : LCSEMC-1.0**TRF Originator** : Shenzhen LCS Compliance Testing Laboratory Ltd.**Master TRF** : Dated 2011-03**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : Portable Power Station**Trade Mark** : **DURACELL®****Test Model** : MCA92W-055Wh**Power Supply** : Dock Input: 24V $\overline{\text{---}}$ 2.5A, 60W Max. Total output: 92W Max.USB-C Input: 5V $\overline{\text{---}}$ 3A, 9V $\overline{\text{---}}$ 3A, 12V $\overline{\text{---}}$ 3A, 15V $\overline{\text{---}}$ 2.4A,
20V $\overline{\text{---}}$ 1.8A (Input: 36W Max.)USB-C Output: 5V $\overline{\text{---}}$ 3A(8400mAh), 9V $\overline{\text{---}}$ 3A(4800mAh),
12V $\overline{\text{---}}$ 3A(3800mAh), 15V $\overline{\text{---}}$ 3A(2900mAh),
20V $\overline{\text{---}}$ 3A(1500mAh).USB-A Output: 5V $\overline{\text{---}}$ 2.4A(8000mAh)

Wireless charger, output 1: 15W Max., output 2: 5W Max.

Result : **Positive****Compiled by:**

Ling Zhu/Administrator

Supervised by:

Cary Luo/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC TEST REPORT**

Test Report No. : LCSA04154028EA	<u>April 28, 2024</u> Date of issue
--	--

Test Model.....	: MCA92W-055Wh
EUT.....	: Portable Power Station
Applicant.....	: Duracell U.S. Operations, Inc.
Address.....	: Berkshire Corporate Park 14 Research Drive. Bethel. CT 06801
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: NanChang Innotech International Co.,Ltd.
Address.....	: Building 6 Guowei Industrial Park,No.669Huangtang E Rd,Linkong Economic Zone,Nanchang,Jiangxi
Telephone.....	: /
Fax.....	: /
Factory.....	: NanChang Innotech International Co.,Ltd.
Address.....	: Building 6 Guowei Industrial Park,No.669Huangtang E Rd,Linkong Economic Zone,Nanchang,Jiangxi
Telephone.....	: /
Fax.....	: /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	April 28, 2024	Initial Issue	---





TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1 Description of Device (EUT)	6
1.2 Support equipment List	6
1.3 External I/O Cable	6
1.4 Description of Test Facility	6
1.5 Statement of the Measurement Uncertainty	8
1.6 Measurement Uncertainty	8
1.7 Description of Test Modes	9
2. TEST METHODOLOGY	11
2.1 EUT Configuration	11
2.2 EUT Exercise	11
2.3 General Test Procedures	11
2.3.1 Conducted Emissions	11
2.3.2 Radiated Emissions	11
3. SYSTEM TEST CONFIGURATION	12
3.1 Justification	12
3.2 EUT Exercise Software	12
3.3 Special Accessories	12
3.4 Block Diagram/Schematics	12
3.5 Equipment Modifications	12
3.6 Test Setup	12
4. SUMMARY OF TEST EQUIPMENT	13
5. SUMMARY OF TEST RESULT	14
6. POWER LINE CONDUCTED MEASUREMENT	15
7. RADIATED EMISSION MEASUREMENT	18
7.1. Block Diagram of Test Setup	18
7.2. Radiated Emission Limit	19
7.3. EUT Configuration on Measurement	19
7.4. Field Strength Calculation	20
7.5. Operating Condition of EUT	20
7.6. Measuring Setting	20
7.7. Test Procedure	20
7.8. Test Results	21
8. 20 DB BANDWIDTH MEASUREMENT	26
8.1. Block Diagram of Test Setup	26
8.2. Test Procedure	26
8.3. Test Results	27
9. PHOTOGRAPHS OF TEST SETUP	28
10. EXTERNAL PHOTOGRAPHS OF THE EUT	28
11. INTERNAL PHOTOGRAPHS OF THE EUT	28





1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT	: Portable Power Station
Test Model	: MCA92W-055Wh
Power Supply	Dock Input: 24V $\overline{\text{---}}$ 2.5A, 60W Max. Total output: 92W Max. USB-C Input: 5V $\overline{\text{---}}$ 3A, 9V $\overline{\text{---}}$ 3A, 12V $\overline{\text{---}}$ 3A, 15V $\overline{\text{---}}$ 2.4A, 20V $\overline{\text{---}}$ 1.8A (Input: 36W Max.) USB-C Output: 5V $\overline{\text{---}}$ 3A(8400mAh), 9V $\overline{\text{---}}$ 3A(4800mAh), 12V $\overline{\text{---}}$ 3A(3800mAh), 15V $\overline{\text{---}}$ 3A(2900mAh), 20V $\overline{\text{---}}$ 3A(1500mAh). USB-A Output: 5V $\overline{\text{---}}$ 2.4A(8000mAh) Wireless charger, output 1: 15W Max., output 2: 5W Max.
Hardware Version	: V1.6
Software Version	: V1.3
Wireless Charging	:
Operating Frequency	: 110.1~205.0KHz
Modulation Type	: ASK
Antenna Type	: Coil Antenna

1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN TIANYIN ELECTRONICS CO., LTD	Power Adapter	TPA-4605020 0UU	--	FCC
Huawei	Mobile phone	FRD-AL10	FRD-AL10C00B373	FCC
Huawei	Earphone	--	--	FCC

Note: Auxiliary equipment is provided by the laboratory.

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Power Port	1	N/A

1.4 Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024

CAB identifier is CN0071.

CNAS Registration Number is L4595.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Firm Registration Number: 254912

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)
Occupied Channel Bandwidth	1GHz~40GHz	±5%	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



1.7 Description of Test Modes

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Modulation Type: CW (ASK)

Test Modes		
Mode 1	AC/DC Adapter (24V/2.5A) + EUT + Phone + Earphone (Battery Status: <1%)	Record
Mode 2	AC/DC Adapter (24V/2.5A) + EUT + Phone + Earphone (Battery Status: <50%)	Record
Mode 3	AC/DC Adapter (24V/2.5A) + EUT + Phone + Earphone (Battery Status: 100%)	Record
Mode 4	AC/DC Adapter (20V/1.8A) + EUT + Phone + Earphone (Battery Status: <1%)	Pre-tested
Mode 5	AC/DC Adapter (20V/1.8A) + EUT + Phone + Earphone (Battery Status: <50%)	Pre-tested
Mode 6	AC/DC Adapter (20V/1.8A) + EUT + Phone + Earphone (Battery Status: 100%)	Pre-tested
Mode 7	AC/DC Adapter (15V/2.4A) + EUT + Phone + Earphone (Battery Status: <1%)	Pre-tested
Mode 8	AC/DC Adapter (15V/2.4A) + EUT + Phone + Earphone (Battery Status: <50%)	Pre-tested
Mode 9	AC/DC Adapter (15V/2.4A) + EUT + Phone + Earphone (Battery Status: 100%)	Pre-tested
Mode 10	AC/DC Adapter (12V/3A) + EUT + Phone + Earphone (Battery Status: <1%)	Pre-tested
Mode 11	AC/DC Adapter (12V/3A) + EUT + Phone + Earphone (Battery Status: <50%)	Pre-tested
Mode 12	AC/DC Adapter (12V/3A) + EUT + Phone + Earphone (Battery Status: 100%)	Pre-tested
Mode 13	AC/DC Adapter (9V/3A) + EUT + Phone + Earphone (Battery Status: <1%)	Pre-tested
Mode 14	AC/DC Adapter (9V/3A) + EUT + Phone + Earphone (Battery Status: <50%)	Pre-tested
Mode 15	AC/DC Adapter (9V/3A) + EUT + Phone + Earphone (Battery Status: 100%)	Pre-tested
Mode 16	AC/DC Adapter (5V/3A) + EUT + Phone + Earphone (Battery Status: <1%)	Pre-tested
Mode 17	AC/DC Adapter (5V/3A) + EUT + Phone + Earphone (Battery Status: <50%)	Pre-tested
Mode 18	AC/DC Adapter (5V/3A) + EUT + Phone + Earphone (Battery Status: 100%)	Pre-tested
Mode 19	AC/DC Adapter (5V/3A) + EUT + Phone (Battery Status: <1%)	Pre-tested
Mode 20	AC/DC Adapter (5V/3A) + EUT + Phone (Battery Status: <50%)	Pre-tested
Mode 21	AC/DC Adapter (5V/3A) + EUT + Phone (Battery Status: 100%)	Pre-tested
Mode 22	AC/DC Adapter (5V/3A) + Earphone (Battery Status: <1%)	Pre-tested
Mode 23	AC/DC Adapter (5V/3A) + Earphone (Battery Status: <50%)	Pre-tested
Mode 24	AC/DC Adapter (5V/3A) + Earphone (Battery Status: 100%)	Pre-tested
Mode 25	AC/DC Adapter (9V/3A) + EUT + Phone (Battery Status: <1%)	Pre-tested
Mode 26	AC/DC Adapter (9V/3A) + EUT + Phone (Battery Status: <50%)	Pre-tested
Mode 27	AC/DC Adapter (9V/3A) + EUT + Phone (Battery Status: 100%)	Pre-tested
Mode 28	AC/DC Adapter (9V/3A) + EUT + Earphone (Battery Status: <1%)	Pre-tested
Mode 29	AC/DC Adapter (9V/3A) + EUT + Earphone (Battery Status: <50%)	Pre-tested
Mode 30	AC/DC Adapter (9V/3A) + EUT + Earphone (Battery Status: 100%)	Pre-tested
Mode 31	AC/DC Adapter (12V/3A) + EUT + Phone (Battery Status: <1%)	Pre-tested
Mode 32	AC/DC Adapter (12V/3A) + EUT + Phone (Battery Status: <50%)	Pre-tested
Mode 33	AC/DC Adapter (12V/3A) + EUT + Phon (Battery Status: 100%)	Pre-tested
Mode 34	AC/DC Adapter (12V/3A) + EUT + Earphone (Battery Status: <1%)	Pre-tested
Mode 35	AC/DC Adapter (12V/3A) + EUT + Earphone (Battery Status: <50%)	Pre-tested
Mode 36	AC/DC Adapter (12V/3A) + EUT + Earphone (Battery Status: 100%)	Pre-tested
Mode 37	AC/DC Adapter (15V/2.4A) + EUT + Phone (Battery Status: <1%)	Pre-tested
Mode 38	AC/DC Adapter (15V/2.4A) + EUT + Phone (Battery Status: <50%)	Pre-tested
Mode 39	AC/DC Adapter (15V/2.4A) + EUT + Phon (Battery Status: 100%)	Pre-tested
Mode 40	AC/DC Adapter (15V/2.4A) + EUT + Earphone (Battery Status: <1%)	Pre-tested
Mode 41	AC/DC Adapter (15V/2.4A) + EUT + Earphone (Battery Status: <50%)	Pre-tested
Mode 42	AC/DC Adapter (15V/2.4A) + EUT + Earphone (Battery Status: 100%)	Pre-tested



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Mode 43	AC/DC Adapter (20V/1.8A) + EUT + Phone (Battery Status: <1%)	Pre-tested
Mode 44	AC/DC Adapter (20V/1.8A) + EUT + Phone (Battery Status: <50%)	Pre-tested
Mode 45	AC/DC Adapter (20V/1.8A) + EUT + Phon (Battery Status: 100%)	Pre-tested
Mode 46	AC/DC Adapter (20V/1.8A) + EUT + Earphone (Battery Status: <1%)	Pre-tested
Mode 47	AC/DC Adapter (20V/1.8A) + EUT + Earphone (Battery Status: <50%)	Pre-tested
Mode 48	AC/DC Adapter (20V/1.8A) + EUT + Earphone (Battery Status: 100%)	Pre-tested
Mode 49	AC/DC Adapter (24V/2.5A) + EUT + Phone (Battery Status: <1%)	Pre-tested
Mode 50	AC/DC Adapter (24V/2.5A) + EUT + Phone (Battery Status: <50%)	Pre-tested
Mode 51	AC/DC Adapter (24V/2.5A) + EUT + Phon (Battery Status: 100%)	Pre-tested
Mode 52	AC/DC Adapter (24V/2.5A) + EUT + Earphone (Battery Status: <1%)	Pre-tested
Mode 53	AC/DC Adapter (24V/2.5A) + EUT + Earphone (Battery Status: <50%)	Pre-tested
Mode 54	AC/DC Adapter (24V/2.5A) + EUT + Earphone (Battery Status: 100%)	Pre-tested

Note: All test modes were pre-tested, but we only recorded the worst case in this report.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR PART 15C 15.207.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

According to its specifications, the EUT must comply with the requirements of the Section 15.207 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz and 1.5 m above ground plane above 1GHz. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a normal condition.

3.2 EUT Exercise Software

N/A.

3.3 Special Accessories

N/A.

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



4. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2023-10-18	2024-10-17
2	DC Power Supply	Agilent	E3642A	N/A	2023-10-18	2024-10-17
3	Temperature & Humidity Chamber	GUANGZHOU GOGNWEN	GDS-100	70932	2023-10-05	2024-10-04
4	EMI Test Software	AUDIX	E3	/	N/A	N/A
5	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2023-06-09	2024-06-08
6	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
7	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2021-08-29	2024-08-28
8	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
9	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2021-09-05	2024-09-04
10	EMI Test Receiver	R&S	ESR 7	101181	2023-08-15	2024-08-14
11	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2023-07-17	2024-07-16
12	Low-frequency amplifier	SchwarzZBECK	BBV9745	00253	2023-10-18	2024-10-17
13	High-frequency amplifier	JS Denki Pte	PA0118-43	JSPA21009	2023-10-18	2024-10-17
14	EMI Test Receiver	R&S	ESPI	101940	2023-08-15	2024-08-14
15	Artificial Mains	R&S	ENV216	101288	2023-06-09	2024-06-08
16	10dB Attenuator	SCHWARZBECK	MTS-IMP-13 6	261115-001-0032	2023-06-09	2024-06-08
17	EMI Test Software	Farad	EZ	/	N/A	N/A
18	Pulse Limiter	R&S	ESH3-Z2	102750-NB	2023-08-15	2024-08-14



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5. SUMMARY OF TEST RESULT

FCC Rules	Description of Test	Test Sample	Result
§15.207(a)	AC Conducted Emissions	Sample 1	Compliant
§15.209	Radiated Spurious Emissions	Sample 1	Compliant
§15.215	20 dB Bandwidth	Sample 1	Compliant


Remark: The measurement uncertainty is not included in the test result.
N/A – Not Applicable!!!





6. POWER LINE CONDUCTED MEASUREMENT

6.1. Block Diagram of Test Setup

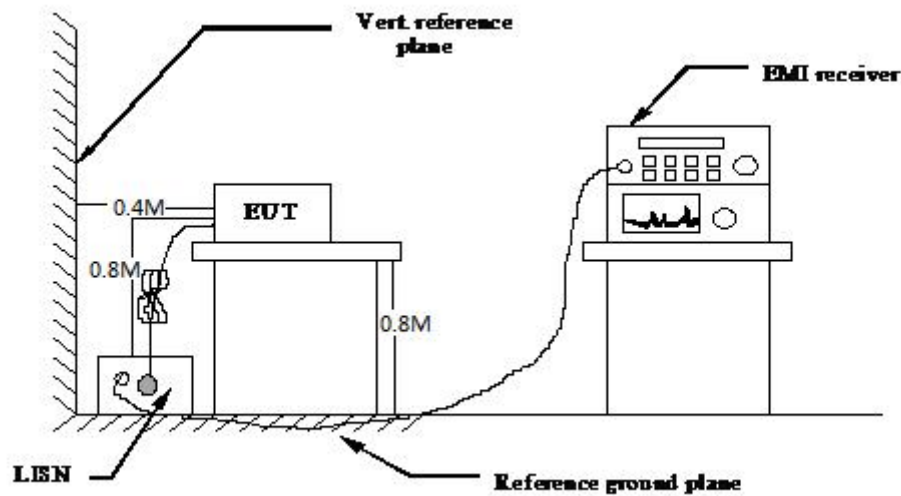

6.2. Disturbance Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dB}\mu\text{V)} = RA \text{ (dB}\mu\text{V)} + PL \text{ (dB)} + CL \text{ (dB)}$$

Where CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

6.3. Standard Applicable

According to §15.207: For all the consumer devices which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

6.4 Test Results

PASS

The test data please refer to following page.

Temperature	22.5℃	Humidity	53.7%
Test Engineer	Jay Luo	Configurations	Transmit



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**AC Power Line Conducted Emission (Power input to adapter @ AC 120V/60Hz (Worst Case))**

Line

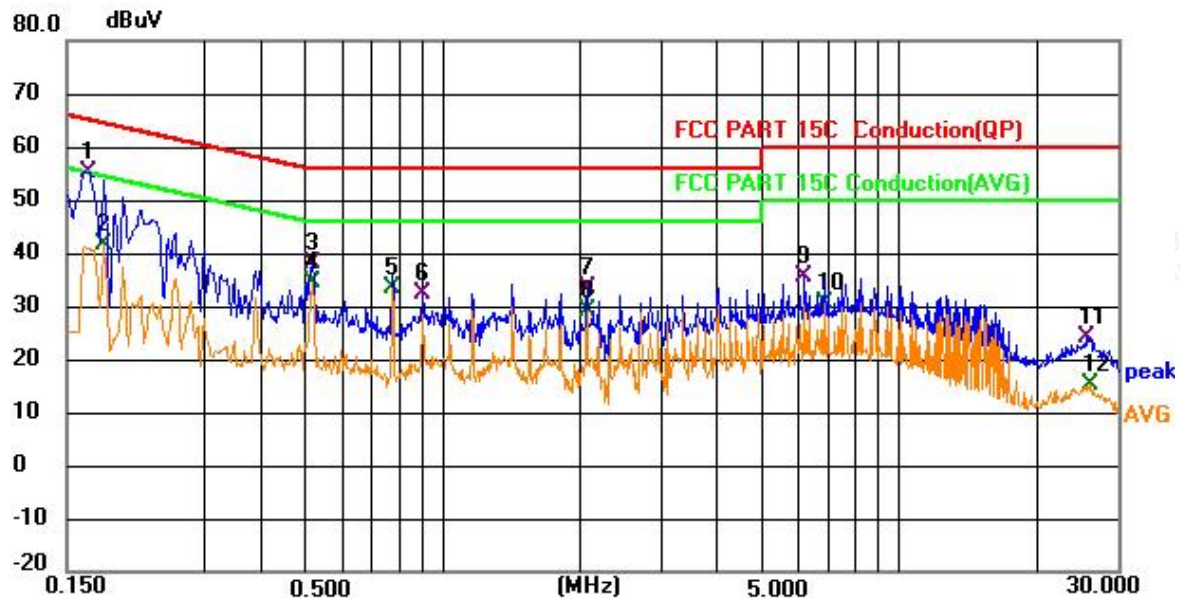

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.168	35.37	19.81	55.18	65.06	-9.88	QP	
2		0.181	21.91	19.74	41.65	54.44	-12.79	AVG	
3		0.514	18.37	19.79	38.16	56.00	-17.84	QP	
4		0.519	14.67	19.78	34.45	46.00	-11.55	AVG	
5		0.775	14.41	19.13	33.54	46.00	-12.46	AVG	
6		0.906	13.30	19.08	32.38	56.00	-23.62	QP	
7		2.067	14.44	18.96	33.40	56.00	-22.60	QP	
8		2.067	10.24	18.96	29.20	46.00	-16.80	AVG	
9		6.202	16.62	18.97	35.59	60.00	-24.41	QP	
10		6.851	11.38	19.26	30.64	50.00	-19.36	AVG	
11		25.634	5.46	18.77	24.23	60.00	-35.77	QP	
12		26.061	-3.73	18.80	15.07	50.00	-34.93	AVG	



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Neutral

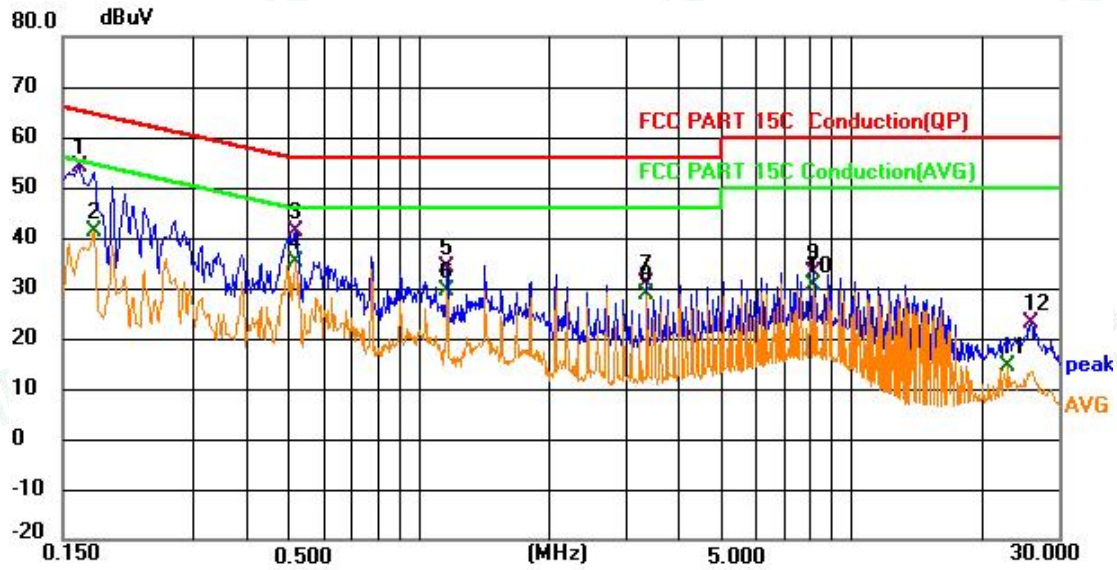

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.164	34.41	19.64	54.05	65.26	-11.21	QP	
2		0.177	21.68	19.69	41.37	54.63	-13.26	AVG	
3		0.514	21.94	19.39	41.33	56.00	-14.67	QP	
4	*	0.519	15.83	19.39	35.22	46.00	-10.78	AVG	
5		1.163	15.19	18.85	34.04	56.00	-21.96	QP	
6		1.163	10.68	18.85	29.53	46.00	-16.47	AVG	
7		3.358	12.03	18.99	31.02	56.00	-24.98	QP	
8		3.358	9.85	18.99	28.84	46.00	-17.16	AVG	
9		8.142	13.23	19.92	33.15	60.00	-26.85	QP	
10		8.142	10.70	19.92	30.62	50.00	-19.38	AVG	
11		23.006	-4.59	19.23	14.64	50.00	-35.36	AVG	
12		25.976	3.68	19.22	22.90	60.00	-37.10	QP	

***Note: Pre-scan all modes and recorded the worst case results in this report.

Margin=Reading level + Correct - Limit

Correct Factor=Lisn Factor+Cable Factor+Insertion loss of Pulse Limiter



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




7. RADIATED EMISSION MEASUREMENT

7.1. Block Diagram of Test Setup

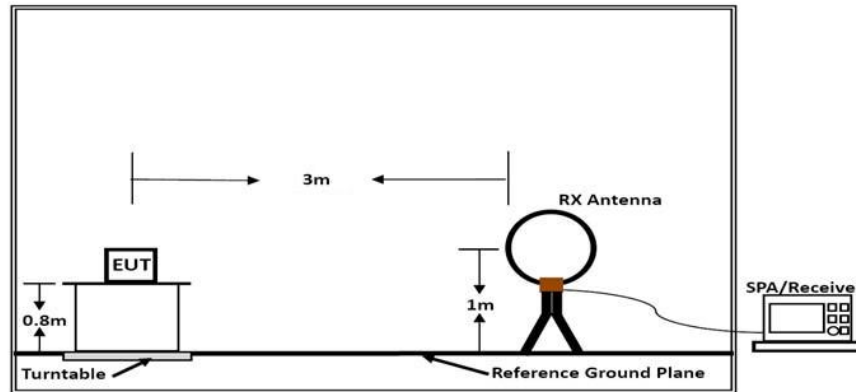

Below 30MHz

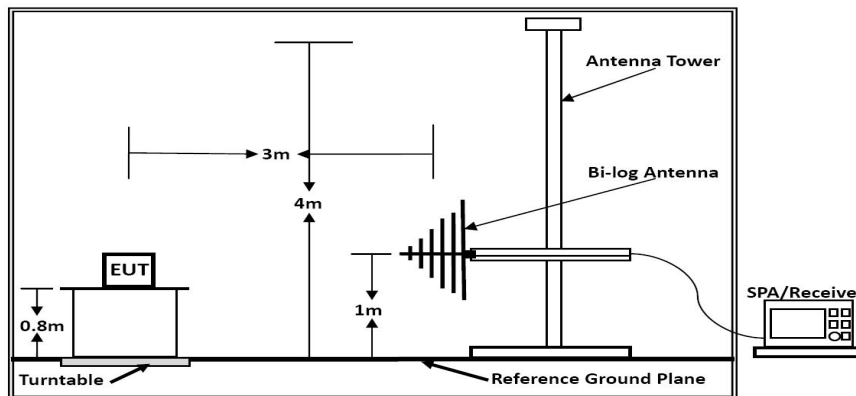

Below 1GHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



7.2. Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

7.3. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



7.4. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

7.5. Operating Condition of EUT

- (1) Setup the EUT as shown in Section 7.1.
- (2) Let the EUT work in worst test mode1 and measure it.

7.6. Measuring Setting

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

7.7. Test Procedure

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Premeasurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 3 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.

--- The final measurement will be done with QP detector with an EMI receiver.

--- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

7.8. Test Results

PASS.

Only report the worst test data mode 1 in test report;

The test data please refer to following page:

Temperature	23.6°C	Humidity	52.2%
Test Engineer	Jay Luo	Configurations	Transmit



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



0.009 MHz – 30 MHz
0 degree



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1374	79.51	-9.79	69.72	104.81	-35.09	QP
2	0.1466	78.59	-9.77	68.82	104.25	-35.43	QP
3	0.4107	55.31	-9.72	45.59	95.33	-49.74	QP
4	0.9863	52.83	-9.27	43.56	67.72	-24.16	QP
5	1.2890	48.75	-9.28	39.47	65.40	-25.93	QP
6	1.5038	48.66	-9.31	39.35	64.06	-24.71	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



90 degree

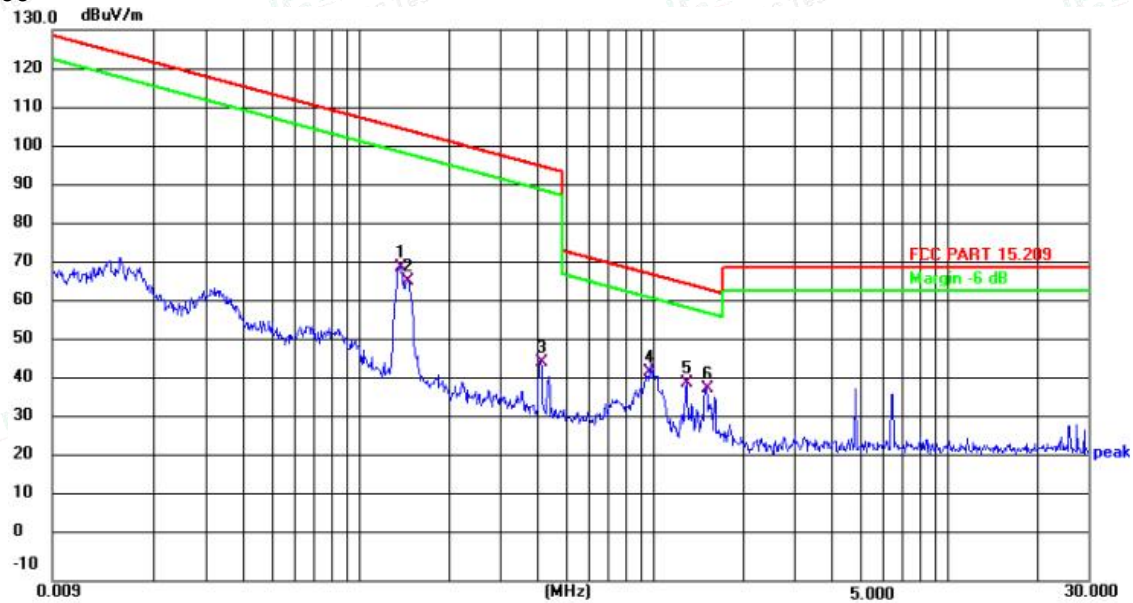

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1374	79.37	-9.79	69.58	104.81	-35.23	QP
2	0.1454	75.86	-9.77	66.09	104.32	-38.23	QP
3	0.4107	55.29	-9.72	45.57	95.33	-49.76	QP
4	0.9625	52.42	-9.27	43.15	67.94	-24.79	QP
5	1.2890	49.49	-9.28	40.21	65.40	-25.19	QP
6	1.5038	48.31	-9.31	39.00	64.06	-25.06	QP

Remark: 1). Measured at antenna position 0 degree and 90 degree.

2). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**Below 1GHz**

Temperature	23.8℃	Humidity	52.1%
Test Engineer	Jay Luo	Configurations	Transmit

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.8953	38.62	-17.69	20.93	40.00	-19.07	QP
2	78.6887	41.96	-19.83	22.13	40.00	-17.87	QP
3	167.2366	43.41	-19.57	23.84	43.50	-19.66	QP
4	273.2340	46.28	-15.38	30.90	46.00	-15.10	QP
5	387.9919	46.79	-14.57	32.22	46.00	-13.78	QP
6	605.6592	39.77	-10.59	29.18	46.00	-16.82	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Vertical

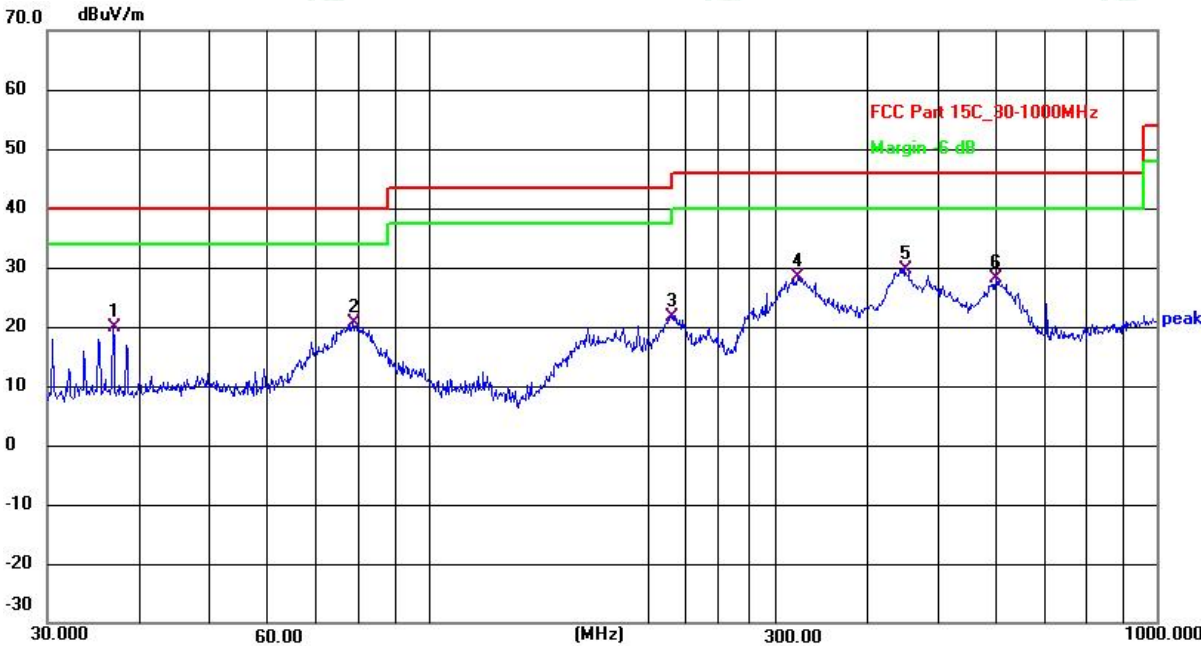

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.8953	37.53	-17.69	19.84	40.00	-20.16	QP
2	78.6887	40.50	-19.83	20.67	40.00	-19.33	QP
3	215.2678	38.73	-16.99	21.74	43.50	-21.76	QP
4	321.0608	42.82	-14.42	28.40	46.00	-17.60	QP
5	451.1350	43.86	-14.20	29.66	46.00	-16.34	QP
6	601.4265	38.57	-10.47	28.10	46.00	-17.90	QP


- 1). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 2). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.





8. 20 DB BANDWIDTH MEASUREMENT

8.1. Block Diagram of Test Setup

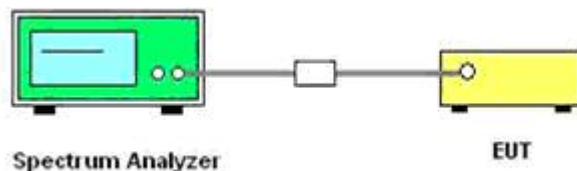

8.2. Test Procedure

Use the following spectrum analyzer settings:

Span = 1KHz

RBW = 100Hz

VBW = 300Hz

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




8.3. Test Results

Test Result Of 20dB Bandwidth Measurement		
Test Frequency (MHz)	20dB Bandwidth (kHz)	Limit (KHz)
0.1356	0.049	Non-Specified
0.1319	0.047	Non-Specified


Result: Pass

Please refer to the following page for test plot.

Test plot of 99% and 20 dB Bandwidth Measurement

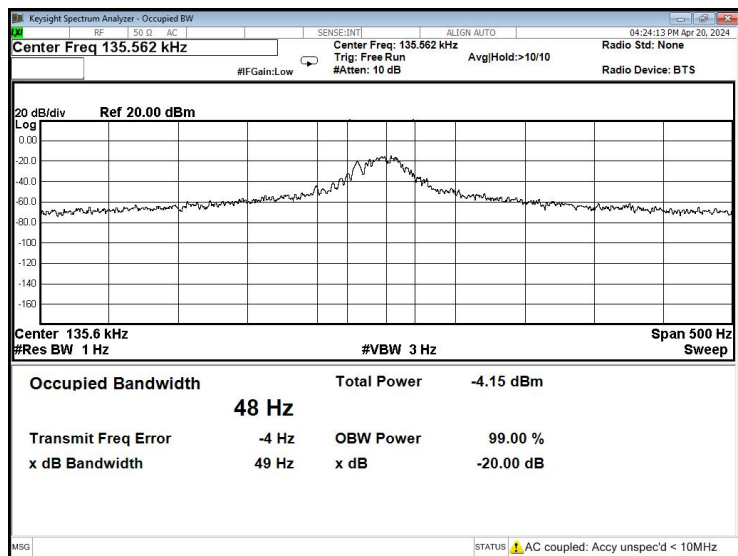

0.1356MHz

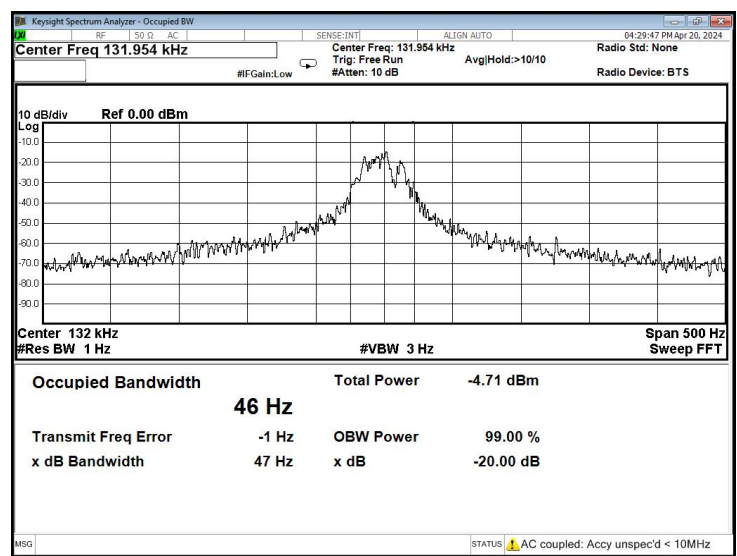

0.1319MHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



9. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files for Test Setup Photos of the EUT.

10. EXTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

11. INTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity