

# FCC Radio Test Report

**FCC ID: QISHMA-LX9****This report concerns: Class II Permissive Change**

**Project No.** : 2004C024  
**Equipment** : Smart Phone  
**Brand Name** : HUAWEI  
**Test Model** : HMA-L29  
**Series Model** : HMA-L09  
**Applicant** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C  
**Manufacturer** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C  
**Date of Receipt** : Apr. 07, 2020  
**Date of Test** : Apr. 09, 2020 ~ May 07, 2020  
**Issued Date** : May 08, 2020  
**Report Version** : R02  
**Test Sample** : Engineering Sample No.: DG20200407232 for conducted, DG20200407233 for radiated.  
**Standard(s)** : FCC Part15, Subpart C (15.247)  
ANSI C63.10-2013  
FCC KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

*Chay . Cai*  
Prepared by : Chay Cai

*Ethan Ma*  
Approved by : Ethan Ma



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

| <b>Table of Contents</b>                                     | <b>Page</b> |
|--------------------------------------------------------------|-------------|
| <b>REPORT ISSUED HISTORY</b>                                 | <b>6</b>    |
| <b>1 . SUMMARY OF TEST RESULTS</b>                           | <b>7</b>    |
| 1.1 TEST FACILITY                                            | 8           |
| 1.2 MEASUREMENT UNCERTAINTY                                  | 8           |
| 1.3 TEST ENVIRONMENT CONDITIONS                              | 9           |
| <b>2 . GENERAL INFORMATION</b>                               | <b>10</b>   |
| 2.1 GENERAL DESCRIPTION OF EUT                               | 10          |
| 2.2 DESCRIPTION OF TEST MODES                                | 13          |
| 2.3 PARAMETERS OF TEST SOFTWARE                              | 14          |
| 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 15          |
| 2.5 SUPPORT UNITS                                            | 15          |
| <b>3 . AC POWER LINE CONDUCTED EMISSIONS TEST</b>            | <b>16</b>   |
| 3.1 LIMIT                                                    | 16          |
| 3.2 TEST PROCEDURE                                           | 16          |
| 3.3 DEVIATION FROM TEST STANDARD                             | 16          |
| 3.4 TEST SETUP                                               | 17          |
| 3.5 EUT OPERATING CONDITIONS                                 | 17          |
| 3.6 TEST RESULTS                                             | 17          |
| <b>4 . RADIATED EMISSION TEST</b>                            | <b>18</b>   |
| 4.1 LIMIT                                                    | 18          |
| 4.2 TEST PROCEDURE                                           | 19          |
| 4.3 DEVIATION FROM TEST STANDARD                             | 20          |
| 4.4 TEST SETUP                                               | 20          |
| 4.5 EUT OPERATING CONDITIONS                                 | 22          |
| 4.6 TEST RESULTS - 9 KHZ TO 30 MHZ                           | 22          |
| 4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ                        | 22          |
| 4.8 TEST RESULTS - ABOVE 1000 MHZ                            | 22          |
| <b>5 . NUMBER OF HOPPING FREQUENCY</b>                       | <b>23</b>   |
| 5.1 LIMIT                                                    | 23          |
| 5.2 TEST PROCEDURE                                           | 23          |
| 5.3 DEVIATION FROM STANDARD                                  | 23          |
| 5.4 TEST SETUP                                               | 23          |
| 5.5 EUT OPERATION CONDITIONS                                 | 23          |

| <b>Table of Contents</b>                          | <b>Page</b> |
|---------------------------------------------------|-------------|
| 5.6 TEST RESULTS                                  | 23          |
| <b>6 . AVERAGE TIME OF OCCUPANCY</b>              | <b>24</b>   |
| 6.1 LIMIT                                         | 24          |
| 6.2 TEST PROCEDURE                                | 24          |
| 6.3 DEVIATION FROM STANDARD                       | 24          |
| 6.4 TEST SETUP                                    | 24          |
| 6.5 EUT OPERATION CONDITIONS                      | 24          |
| 6.6 TEST RESULTS                                  | 24          |
| <b>7 . HOPPING CHANNEL SEPARATION MEASUREMENT</b> | <b>25</b>   |
| 7.1 LIMIT                                         | 25          |
| 7.2 TEST PROCEDURE                                | 25          |
| 7.3 DEVIATION FROM STANDARD                       | 25          |
| 7.4 TEST SETUP                                    | 25          |
| 7.5 EUT OPERATION CONDITIONS                      | 25          |
| 7.6 TEST RESULTS                                  | 25          |
| <b>8 . BANDWIDTH TEST</b>                         | <b>26</b>   |
| 8.1 LIMIT                                         | 26          |
| 8.2 TEST PROCEDURE                                | 26          |
| 8.3 DEVIATION FROM STANDARD                       | 26          |
| 8.4 TEST SETUP                                    | 26          |
| 8.5 EUT OPERATION CONDITIONS                      | 26          |
| 8.6 TEST RESULTS                                  | 26          |
| <b>9 . MAXIMUM OUTPUT POWER TEST</b>              | <b>27</b>   |
| 9.1 LIMIT                                         | 27          |
| 9.2 TEST PROCEDURE                                | 27          |
| 9.3 DEVIATION FROM STANDARD                       | 27          |
| 9.4 TEST SETUP                                    | 27          |
| 9.5 EUT OPERATION CONDITIONS                      | 27          |
| 9.6 TEST RESULTS                                  | 27          |
| <b>10 . CONDUCTED SPURIOUS EMISSION</b>           | <b>28</b>   |
| 10.1 LIMIT                                        | 28          |
| 10.2 TEST PROCEDURE                               | 28          |
| 10.3 DEVIATION FROM STANDARD                      | 28          |
| 10.4 TEST SETUP                                   | 28          |

| <b>Table of Contents</b>                                   | <b>Page</b> |
|------------------------------------------------------------|-------------|
| <b>10.5 EUT OPERATION CONDITIONS</b>                       | <b>28</b>   |
| <b>10.6 TEST RESULTS</b>                                   | <b>28</b>   |
| <b>11 . MEASUREMENT INSTRUMENTS LIST</b>                   | <b>29</b>   |
| <b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>      | <b>31</b>   |
| <b>APPENDIX B - RADIATED EMISSION - 9 KHZ-30 MHZ</b>       | <b>34</b>   |
| <b>APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b> | <b>39</b>   |
| <b>APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ</b>     | <b>42</b>   |
| <b>APPENDIX E - NUMBER OF HOPPING FREQUENCY</b>            | <b>163</b>  |
| <b>APPENDIX F - AVERAGE TIME OF OCCUPANCY</b>              | <b>167</b>  |
| <b>APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT</b> | <b>173</b>  |
| <b>APPENDIX H - BANDWIDTH</b>                              | <b>177</b>  |
| <b>APPENDIX I - MAXIMUM OUTPUT POWER</b>                   | <b>181</b>  |
| <b>APPENDIX J - CONDUCTED SPURIOUS EMISSION</b>            | <b>185</b>  |

**REPORT ISSUED HISTORY**

| Report Version | Description                                                                                                                                                             | Issued Date   |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| R00            | Compared with original report (SZEM180700654906), Model HMA-L29 added BT UHD function by upgrade software. So all the test items for BT UHD are evaluated and recorded. | Apr. 23, 2020 |
| R01            | Added calculation of the dwell time and removed the test photos.                                                                                                        | Apr. 30, 2020 |
| R02            | Modified the comments of TCB.                                                                                                                                           | May 08, 2020  |

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| FCC Part15, Subpart C (15.247)      |                                   |                                        |          |         |
|-------------------------------------|-----------------------------------|----------------------------------------|----------|---------|
| Standard(s) Section                 | Test Item                         | Test Result                            | Judgment | Remark  |
| 15.207                              | AC Power Line Conducted Emissions | APPENDIX A                             | PASS     | -----   |
| 15.247(d)<br>15.205(a)<br>15.209(a) | Radiated Emission                 | APPENDIX B<br>APPENDIX C<br>APPENDIX D | PASS     | -----   |
| 15.247<br>(a)(1)(iii)               | Number of Hopping Frequency       | APPENDIX E                             | PASS     | -----   |
| 15.247<br>(a)(1)(iii)               | Average Time Of Occupancy         | APPENDIX F                             | PASS     | -----   |
| 15.247(a)(1)                        | Hopping Channel Separation        | APPENDIX G                             | PASS     | -----   |
| 15.247(a)(1)                        | Bandwidth                         | APPENDIX H                             | PASS     | -----   |
| 15.247(a)(1)                        | Maximum Output Power              | APPENDIX I                             | PASS     | -----   |
| 15.247(d)                           | Conducted Spurious Emission       | APPENDIX J                             | PASS     | -----   |
| 15.203                              | Antenna Requirement               | -----                                  | PASS     | Note(2) |

Note:

- (1) "N/A" denotes test is not applicable in this test report
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

## 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China  
BTL's Test Firm Registration Number for FCC: 357015  
BTL's Designation Number for FCC: CN1240

## 1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))  
The BTL measurement uncertainty as below table:

### A. AC power line conducted emissions test:

| Test Site | Method | Measurement Frequency Range | U, (dB) |
|-----------|--------|-----------------------------|---------|
| DG-C02    | CISPR  | 150kHz ~ 30MHz              | 2.60    |

### B. Radiated emissions test:

| Test Site | Method | Measurement Frequency Range | Ant.<br>H / V | U, (dB) |
|-----------|--------|-----------------------------|---------------|---------|
| DG-CB03   | CISPR  | 9kHz ~ 30MHz                | V             | 3.79    |
|           |        | 9kHz ~ 30MHz                | H             | 3.57    |
|           |        | 30MHz ~ 200MHz              | V             | 4.88    |
|           |        | 30MHz ~ 200MHz              | H             | 4.14    |
|           |        | 200MHz ~ 1,000MHz           | V             | 4.62    |
|           |        | 200MHz ~ 1,000MHz           | H             | 4.80    |
|           |        | 1GHz ~ 6GHz                 | -             | 4.58    |
|           |        | 6GHz ~ 18GHz                | -             | 5.18    |
|           |        | 18GHz ~ 26.5GHz             | -             | 3.80    |
|           |        | 26.5GHz ~ 40GHz             | -             | 4.30    |

### C. Other Measurement:

| Test Item                   | Uncertainty |
|-----------------------------|-------------|
| Conducted Spurious Emission | 2.67 dB     |
| Hopping Channel Separation  | 53.46 MHz   |
| Output Power                | 0.95 dB     |
| Number of Hopping Frequency | 53.46 MHz   |
| Temperature                 | 0.08 °C     |
| Humidity                    | 1.5%        |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

| Test Item                         | Temperature | Humidity | Test Voltage | Tested By   |
|-----------------------------------|-------------|----------|--------------|-------------|
| AC Power Line Conducted Emissions | 25°C        | 55%      | AC 120V/60Hz | Sheldon Ou  |
| Radiated Emissions-9K-30MHz       | 25°C        | 60%      | AC 120V/60Hz | Sheldon Ou  |
| Radiated Emissions-30 MHz to 1GHz | 24°C        | 68%      | AC 120V/60Hz | Sheldon Ou  |
| Radiated Emissions-Above 1000 MHz | 24°C        | 68%      | AC 120V/60Hz | Sheldon Ou  |
| Number of Hopping Frequency       | 25°C        | 60%      | DC 3.82V     | Hayden Chen |
| Average Time Of Occupancy         | 25°C        | 60%      | DC 3.82V     | Hayden Chen |
| Hopping Channel Separation        | 25°C        | 60%      | DC 3.82V     | Hayden Chen |
| Bandwidth                         | 25°C        | 60%      | DC 3.82V     | Hayden Chen |
| Maximum Output Power              | 25°C        | 60%      | DC 3.82V     | Hayden Chen |
| Conducted Spurious Emission       | 25°C        | 60%      | DC 3.82V     | Hayden Chen |

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                       |                                                                                                                                                                                                                |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment             | Smart Phone                                                                                                                                                                                                    |
| Brand Name            | HUAWEI                                                                                                                                                                                                         |
| Test Model            | HMA-L29                                                                                                                                                                                                        |
| Series Model          | HMA-L09                                                                                                                                                                                                        |
| Model Difference(s)   | The only difference between HMA-L29 and HMA-L09 is that HMA-L09 deletes into single SIM card by software. Other parts of the two models are the same.                                                          |
| Hardware Version      | HL1HIMAM                                                                                                                                                                                                       |
| Software Version      | 10.1.0.162(C432E2R1P5)                                                                                                                                                                                         |
| Power Source          | 1# DC voltage supplied from AC/DC adapter.<br>2# Supplied from battery.<br>3# Supplied from USB port.                                                                                                          |
| Power Rating          | 1# I/P: 100-240V ~50/60Hz, 0.75A<br>O/P: 5V === 2A OR 4.5V === 5A OR 5V === 4.5A<br>2# DC 3.82V, 3900mAh<br>3# DC 5V                                                                                           |
| Operation Frequency   | 2404 MHz ~ 2478 MHz                                                                                                                                                                                            |
| Modulation Type       | UHD 2M GFSK (1Mbps)<br>UHD 2M GFSK (2Mbps)<br>UHD 2M $\pi/4$ -DQPSK (4Mbps)                                                                                                                                    |
| Transfer Rate         | UHD 2M 8DPSK (6Mbps)<br>UHD 4M $\pi/4$ -DQPSK (8Mbps)                                                                                                                                                          |
| Modulation Technology | FHSS                                                                                                                                                                                                           |
| Max. Output Power     | UHD 2M GFSK (1Mbps): 7.67dBm (0.0058W)<br>UHD 2M GFSK (2Mbps): 7.76dBm (0.0060W)<br>UHD 2M $\pi/4$ -DQPSK: 10.31dBm (0.0107W)<br>UHD 2M 8DPSK: 10.72dBm (0.0118W)<br>UHD 4M $\pi/4$ -DQPSK: 10.29dBm (0.0107W) |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2. Channel List:

| For UHD 2M GFSK (1Mbps), UHD 2M GFSK (2Mbps), UHD 2M $\pi/4$ -DQPSK, UHD 2M 8DPSK Mode |                 |         |                 |
|----------------------------------------------------------------------------------------|-----------------|---------|-----------------|
| Channel                                                                                | Frequency (MHz) | Channel | Frequency (MHz) |
| 00                                                                                     | 2404            | 21      | 2446            |
| 01                                                                                     | 2406            | 22      | 2448            |
| 02                                                                                     | 2408            | 23      | 2450            |
| 03                                                                                     | 2410            | 24      | 2452            |
| 04                                                                                     | 2412            | 25      | 2454            |
| 05                                                                                     | 2414            | 26      | 2456            |
| 06                                                                                     | 2416            | 27      | 2458            |
| 07                                                                                     | 2418            | 28      | 2460            |
| 08                                                                                     | 2420            | 29      | 2462            |
| 09                                                                                     | 2422            | 30      | 2464            |
| 10                                                                                     | 2424            | 31      | 2466            |
| -                                                                                      | -               | 32      | 2468            |
| 12                                                                                     | 2428            | 33      | 2470            |
| 13                                                                                     | 2430            | 34      | 2472            |
| 14                                                                                     | 2432            | 35      | 2474            |
| 15                                                                                     | 2434            | 36      | 2476            |
| 16                                                                                     | 2436            | 37      | 2478            |
| 17                                                                                     | 2438            | -       | -               |
| 18                                                                                     | 2440            | -       | -               |
| 19                                                                                     | 2442            | -       | -               |
| 20                                                                                     | 2444            | -       | -               |

| For UHD 4M $\pi/4$ -DQPSK Mode |                 |         |                 |
|--------------------------------|-----------------|---------|-----------------|
| Channel                        | Frequency (MHz) | Channel | Frequency (MHz) |
| 00                             | 2404            | 20      | 2444            |
| 02                             | 2408            | 22      | 2448            |
| 04                             | 2412            | 24      | 2452            |
| 06                             | 2416            | 26      | 2456            |
| 08                             | 2420            | 28      | 2460            |
| 10                             | 2424            | 30      | 2464            |
| 12                             | 2428            | 32      | 2468            |
| 14                             | 2432            | 34      | 2472            |
| 16                             | 2436            | 36      | 2476            |
| 18                             | 2440            | -       | -               |

## 3. Table for Filed Antenna:

| Ant. | Brand | Model Name | Antenna Type | Connector | Gain (dBi) |
|------|-------|------------|--------------|-----------|------------|
| 1    | N/A   | N/A        | Internal     | N/A       | -1.45      |

## 4. The EUT contains following accessory devices:

| Items             | Trademark / Manufacturer / Factory                               | Model Name                                   | Description                                                                                           |
|-------------------|------------------------------------------------------------------|----------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Adapter<br>(Note) | HUNTKEY / Salcomp / HUAWEI                                       | HW-050450B00<br>HW-050450E00<br>HW-050450U00 | I/P: 100-240V<br>~50/60Hz, 0.75A<br>O/P: 5V $\equiv$ 2A<br>OR 4.5V $\equiv$ 5A<br>OR 5V $\equiv$ 4.5A |
|                   | HUNTKEY / Salcomp                                                | HW-050450A00                                 |                                                                                                       |
|                   | HUAWEI                                                           | HW-050450E01                                 |                                                                                                       |
| Battery           | Huawei Technologies Co., Ltd.<br>(Manufacturer: Sunwoda / Desay) | HB436486ECW                                  | Rated capacity:<br>3900mAh<br>Nominal Voltage:<br>+3.82V<br>Charging Voltage:<br>+4.40V               |
| Earphone          | Jiangxi Lianchuang Hongsheng<br>Electronic Co., LTD              | MEMD1632B580C00                              | /                                                                                                     |
|                   | MERRY ELECTRONICS<br>(SHENZHEN) CO., LTD.                        | EMC309-001                                   |                                                                                                       |
|                   | Boluo County Quancheng<br>Electronic Co.,Ltd                     | 1311-3291-3.5mm-229                          |                                                                                                       |
| USB Cable         | Ningbo Broad Telecommunication<br>Co., Ltd                       | WA0009                                       | /                                                                                                     |
|                   | LUXSHARE Precision Industry<br>Co., Ltd.                         | L99UC117-CS-H                                |                                                                                                       |
|                   | HUIZHOU DEHONG<br>TECHNOLOGY CO.,LTD.                            | 330-50465                                    |                                                                                                       |

Note:

- 1) HW-050450B00, HW-050450E00, HW-050450U00 and HW-050450A00 have same board.
- 2) HW-050450E01 has different board.

## 2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

| Pretest Mode | Description                     |
|--------------|---------------------------------|
| Mode 1       | TX Mode <b>NOTE (1)</b>         |
| Mode 2       | TX Mode Channel 18_UHD 2M 8DPSK |

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

| AC Power Line Conducted Emissions |                                 |
|-----------------------------------|---------------------------------|
| Final Test Mode                   | Description                     |
| Mode 2                            | TX Mode Channel 18_UHD 2M 8DPSK |

| Radiated emissions test - Below 1GHz |                                 |
|--------------------------------------|---------------------------------|
| Final Test Mode                      | Description                     |
| Mode 2                               | TX Mode Channel 18_UHD 2M 8DPSK |

| Radiated emissions test - Above 1GHz |                         |
|--------------------------------------|-------------------------|
| Final Test Mode                      | Description             |
| Mode 1                               | TX Mode <b>NOTE (1)</b> |

| Conducted test  |                         |
|-----------------|-------------------------|
| Final Test Mode | Description             |
| Mode 1          | TX Mode <b>NOTE (1)</b> |

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) The EUT is considered a portable unit, it was pre-tested on the positioned of each 3 axis. The worst case was found positioned on Y-plane. Therefore only the test data of this Y-plane was used for radiated emission measurement test.
- (3) For radiated spurious emissions below 1 GHz test, all adapters had been pre-tested and in this report only recorded the worst case.
- (4) For radiated spurious emissions below 1 GHz test, the UHD 2M 8DPSK mode channel 18 is found to be the worst case and recorded.

## 2.3 PARAMETERS OF TEST SOFTWARE

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

|                          |              |
|--------------------------|--------------|
| Test Software            | N/A          |
| Frequency (MHz)          | Hopping Mode |
| Power Parameters (1Mbps) | N/A          |
| Power Parameters (2Mbps) | N/A          |
| Power Parameters (4Mbps) | N/A          |
| Power Parameters (6Mbps) | N/A          |
| Power Parameters (8Mbps) | N/A          |

## 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

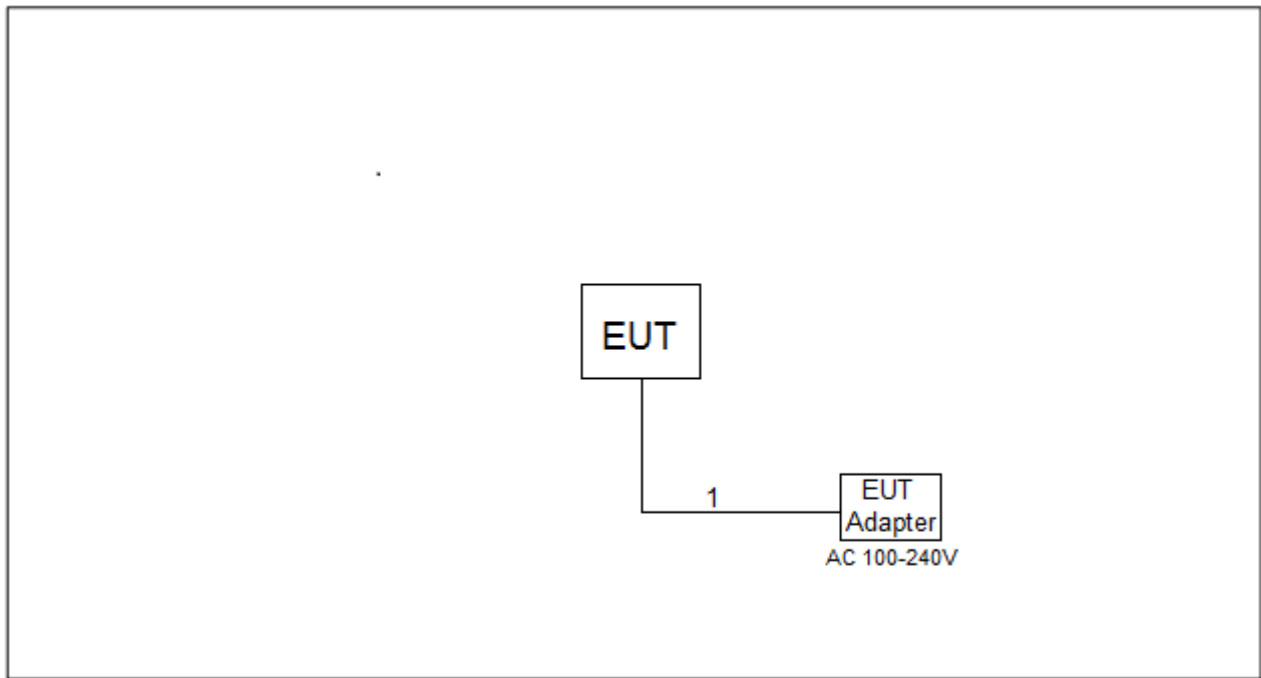

## 2.5 SUPPORT UNITS

| Item | Equipment | Brand | Model No. | Series No. |
|------|-----------|-------|-----------|------------|
| -    | -         | -     | -         | -          |

| Item | Cable Type | Shielded Type | Ferrite Core | Length |
|------|------------|---------------|--------------|--------|
| 1    | USB Cable  | YES           | NO           | 1m     |

### 3. AC POWER LINE CONDUCTED EMISSIONS TEST

#### 3.1 LIMIT

| Frequency of Emission (MHz) | Limit (dB $\mu$ V) |           |
|-----------------------------|--------------------|-----------|
|                             | Quasi-peak         | Average   |
| 0.15 - 0.5                  | 66 to 56*          | 56 to 46* |
| 0.5 - 5.0                   | 56                 | 46        |
| 5.0 - 30.0                  | 60                 | 50        |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.4 TEST SETUP

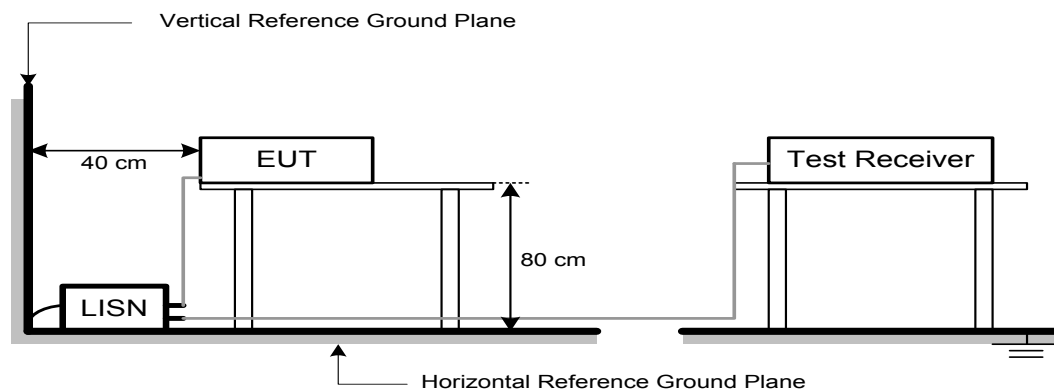

### 3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting data or hopping on mode.

### 3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "\*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

## 4. RADIATED EMISSION TEST

### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                           |
| 0.490-1.705     | 24000/F(kHz)                      | 30                            |
| 1.705-30.0      | 30                                | 30                            |
| 30-88           | 100                               | 3                             |
| 88-216          | 150                               | 3                             |
| 216-960         | 200                               | 3                             |
| Above 960       | 500                               | 3                             |

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

| Frequency (MHz) | Band edge/ Harmonic at 3m (dBμV/m) |         | Harmonic at 1.5m (dBμV/m) |             |
|-----------------|------------------------------------|---------|---------------------------|-------------|
|                 | Peak                               | Average | Peak                      | Average     |
| Above 1000      | 74                                 | 54      | 80 (Note 4)               | 60 (Note 4) |

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left( \frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$$20 \log d_{\text{limit}}/d_{\text{measure}} = 20 \log 3/1.5 = 6 \text{ dB.}$$

| Spectrum Parameter                         | Setting                                                                     |
|--------------------------------------------|-----------------------------------------------------------------------------|
| Attenuation                                | Auto                                                                        |
| Start Frequency                            | 1000 MHz                                                                    |
| Stop Frequency                             | 10th carrier harmonic                                                       |
| RBW / VBW<br>(Emission in restricted band) | RBW 1 MHz VBW 3 MHz peak detector for Pk value<br>RMS detector for AV value |

| Receiver Parameter     | Setting                             |
|------------------------|-------------------------------------|
| Attenuation            | Auto                                |
| Start ~ Stop Frequency | 9 kHz~90 kHz for PK/AVG detector    |
| Start ~ Stop Frequency | 90 kHz~110 kHz for QP detector      |
| Start ~ Stop Frequency | 110 kHz~490 kHz for PK/AVG detector |
| Start ~ Stop Frequency | 490 kHz~30 MHz for QP detector      |
| Start ~ Stop Frequency | 30 MHz~1000 MHz for QP detector     |

RBW / VBW as a function of frequency:

| Frequency     | RBW / VBW         |
|---------------|-------------------|
| 9 ~ 150 KHz   | 300 Hz / 1000 Hz  |
| 0.15 ~ 30 MHz | 10 KHz / 30 KHz   |
| 30 ~ 1000 MHz | 120 KHz / 300 KHz |
| > 1000 MHz    | 1 MHz / 3MHz      |

## 4.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights suspected the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.  
(below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item – EUT Test Photos.

### 4.3 DEVIATION FROM TEST STANDARD


No deviation

### 4.4 TEST SETUP


9 kHz-30 MHz

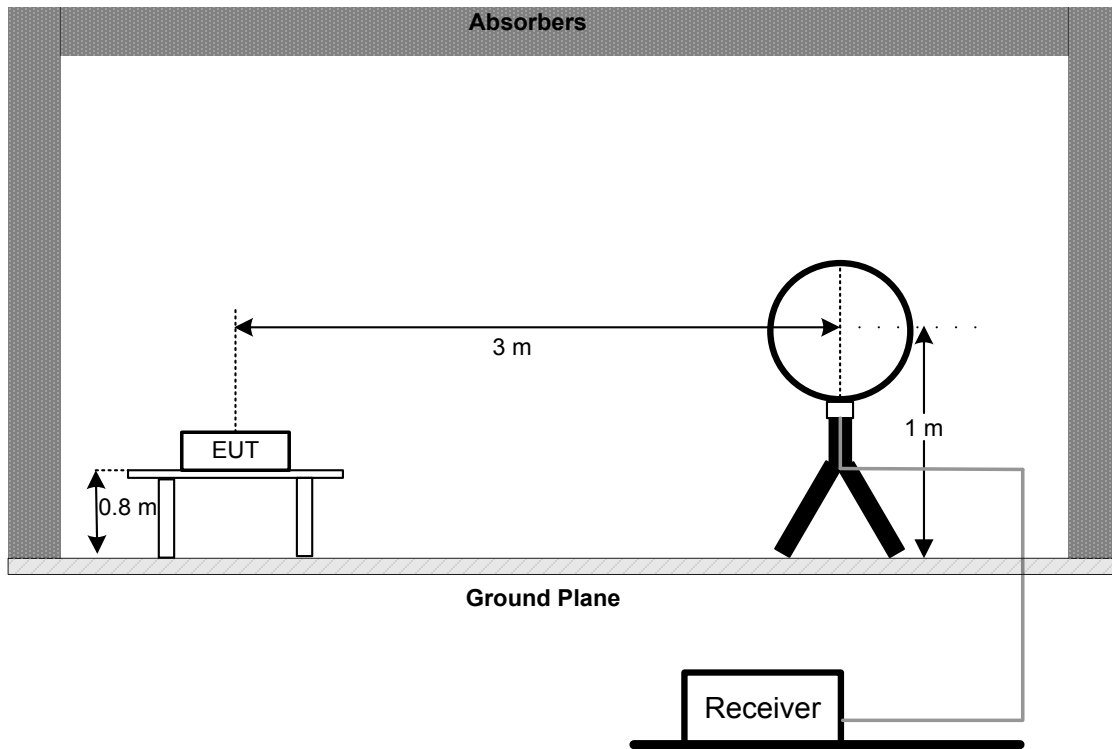


30 MHz to 1 GHz

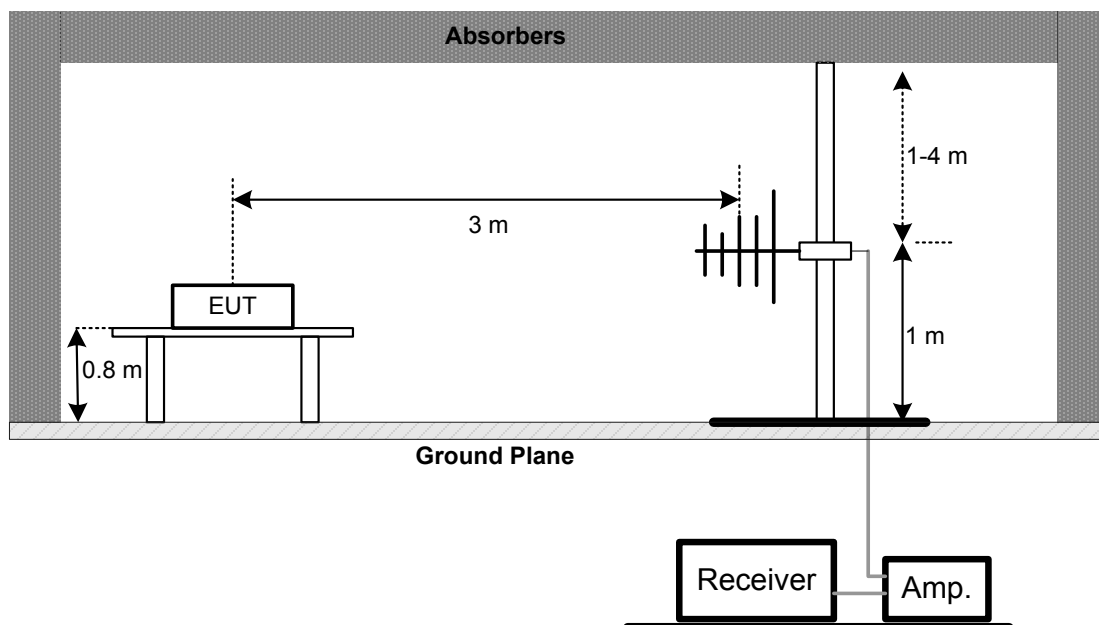


### Above 1 GHz Band edge

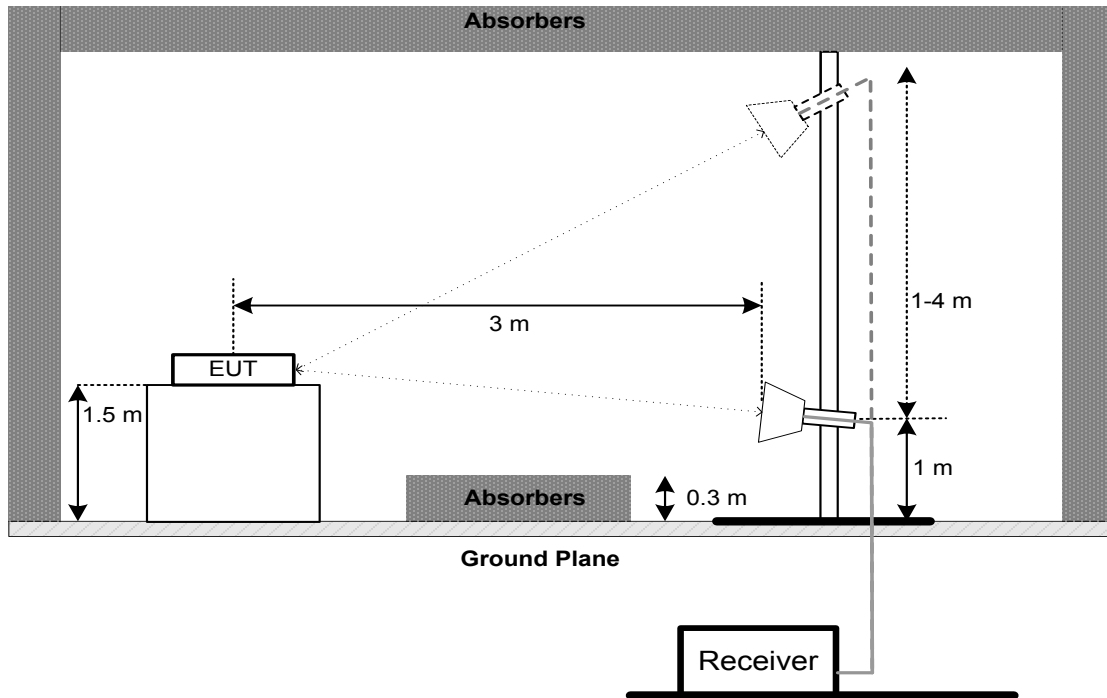

### Harmonic (1 GHz to 18 GHz)

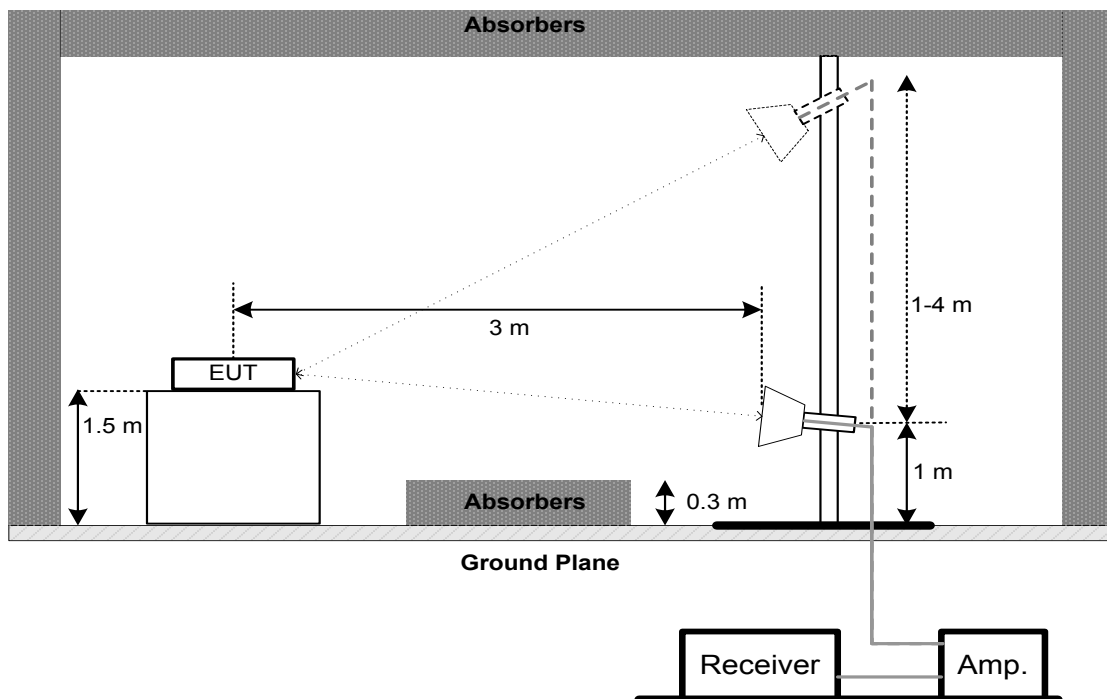

## Harmonic (18 GHz to 26.5 GHz)

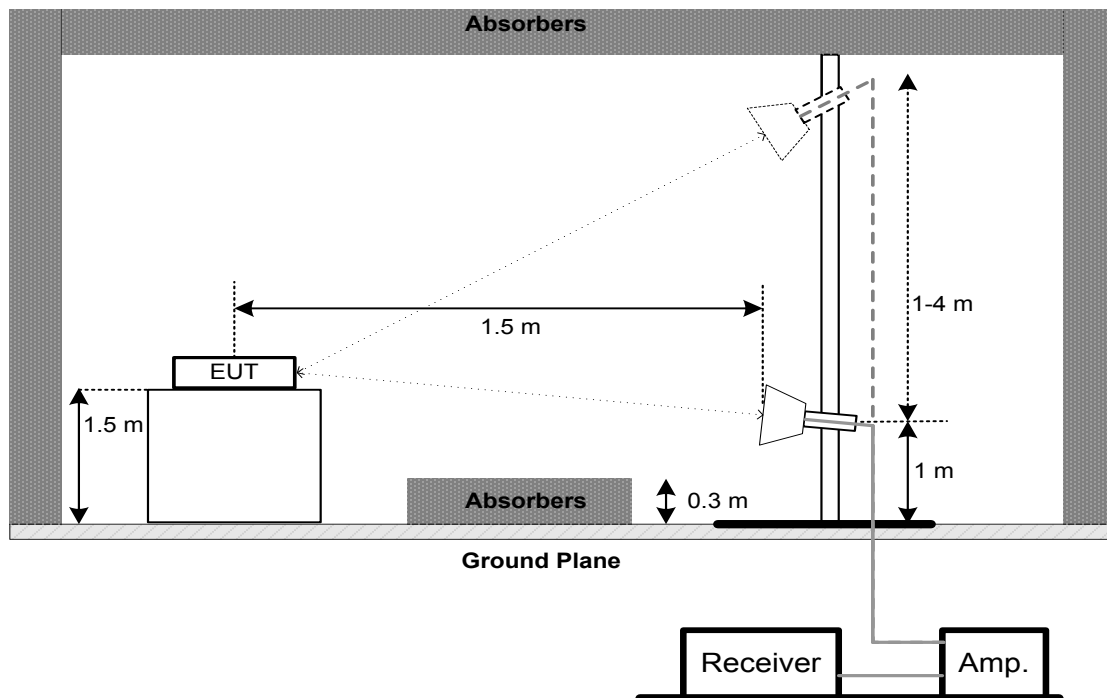

### 4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 4.6 TEST RESULTS - 9 kHz TO 30 MHz

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

### 4.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

### 4.8 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. NUMBER OF HOPPING FREQUENCY

### 5.1 LIMIT

| FCC Part15, Subpart C (15.247) |                             |
|--------------------------------|-----------------------------|
| Section                        | Test Item                   |
| 15.247(a)(1)(iii)              | Number of Hopping Frequency |

| Spectrum Parameters | Setting                     |
|---------------------|-----------------------------|
| Attenuation         | Auto                        |
| Span Frequency      | > Operating Frequency Range |
| RBW                 | 100 kHz                     |
| VBW                 | 100 kHz                     |
| Detector            | Peak                        |
| Trace               | Max Hold                    |
| Sweep Time          | Auto                        |

### 5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=100 kHz, VBW=100 kHz, Sweep time = Auto.

### 5.3 DEVIATION FROM STANDARD

No deviation.

### 5.4 TEST SETUP



### 5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 5.6 TEST RESULTS

Please refer to the APPENDIX E

## 6. AVERAGE TIME OF OCCUPANCY

### 6.1 LIMIT

| FCC Part15, Subpart C (15.247) |                           |        |
|--------------------------------|---------------------------|--------|
| Section                        | Test Item                 | Limit  |
| 15.247(a)(1)(iii)              | Average Time of Occupancy | 0.4sec |

### 6.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz
- Use a video trigger with the trigger level set to enable triggering only on full pulses
- Sweep Time is more than once pulse time
- Set the center frequency on any frequency would be measure and set the frequency span to zero span
- Measure the maximum time duration of one single pulse

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 6.6 TEST RESULTS

Please refer to the APPENDIX F

## 7. HOPPING CHANNEL SEPARATION MEASUREMENT

### 7.1 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

| Spectrum Parameter | Setting                                       |
|--------------------|-----------------------------------------------|
| Attenuation        | Auto                                          |
| Span Frequency     | > Measurement Bandwidth or Channel Separation |
| RBW                | 30 kHz                                        |
| VBW                | 100 kHz                                       |
| Detector           | Peak                                          |
| Trace              | Max Hold                                      |
| Sweep Time         | Auto                                          |


### 7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Span = wide enough to capture the peaks of two adjacent channels  
Resolution (or IF) Bandwidth (RBW)  $\approx$  30% of the channel spacing  
Video (or Average) Bandwidth (VBW)  $\geq$  RBW  
Sweep = Auto  
Detector function = Peak  
Trace = Max Hold

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 7.6 TEST RESULTS

Please refer to the APPENDIX G

## 8. BANDWIDTH TEST

### 8.1 LIMIT

| FCC Part15, Subpart C (15.247) |           |
|--------------------------------|-----------|
| Section                        | Test Item |
| 15.247(a)(1)                   | Bandwidth |

| Spectrum Parameter | Setting                                                     |
|--------------------|-------------------------------------------------------------|
| Attenuation        | Auto                                                        |
| Span Frequency     | > Measurement Bandwidth                                     |
| RBW                | 30 kHz for 1Mbps, 2Mbps, 4Mbps, 6Mbps<br>100 kHz for 8Mbps  |
| VBW                | 100 kHz for 1Mbps, 2Mbps, 4Mbps, 6Mbps<br>300 kHz for 8Mbps |
| Detector           | Peak                                                        |
| Trace              | Max Hold                                                    |
| Sweep Time         | Auto                                                        |


### 8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: For 1Mbps, 2Mbps, 4Mbps, 6Mbps: RBW= 30 kHz, VBW=100 kHz,  
For 8Mbps: RBW= 100 kHz, VBW=300 kHz. Sweep Time = Auto.

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP

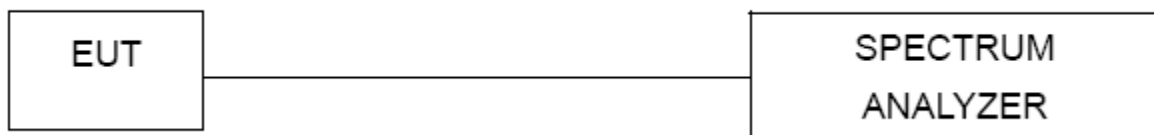

### 8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 8.6 TEST RESULTS

Please refer to the APPENDIX H

## 9. MAXIMUM OUTPUT POWER TEST

### 9.1 LIMIT

| FCC Part15 , Subpart C (15.247) |                      |                      |
|---------------------------------|----------------------|----------------------|
| Section                         | Test Item            | Limit                |
| 15.247(a)(1)                    | Maximum Output Power | 0.125 Watt or 21 dBm |

Note: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


### 9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: For 1Mbps, 2Mbps, 4Mbps, 6Mbps: RBW= 3 MHz, VBW= 3 MHz,  
For 8Mbps: RBW= 10 MHz, VBW= 10 MHz. Sweep time = Auto.

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP

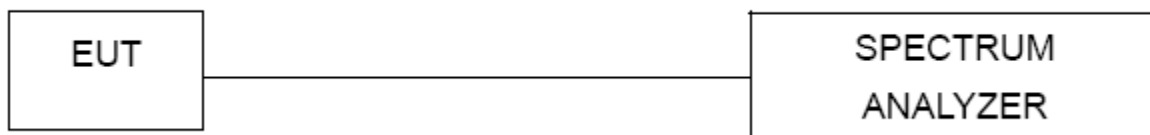

### 9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 9.6 TEST RESULTS

Please refer to the APPENDIX I

## 10. CONDUCTED SPURIOUS EMISSION

### 10.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

### 10.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

### 10.3 DEVIATION FROM STANDARD

No deviation.

### 10.4 TEST SETUP



### 10.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 10.6 TEST RESULTS

Please refer to the APPENDIX J

## 11. MEASUREMENT INSTRUMENTS LIST

| AC Power Line Conducted Emissions |                      |              |                       |            |                  |
|-----------------------------------|----------------------|--------------|-----------------------|------------|------------------|
| Item                              | Kind of Equipment    | Manufacturer | Type No.              | Serial No. | Calibrated until |
| 1                                 | EMI Test Receiver    | R&S          | ESCI                  | 100382     | Feb. 28, 2021    |
| 2                                 | LISN                 | EMCO         | 3816/2                | 52765      | Mar. 01, 2021    |
| 3                                 | TWO-LINE V-NETWORK   | R&S          | ENV216                | 101447     | May 19, 2020     |
| 4                                 | 50Ω Terminator       | SHX          | TF5-3                 | 15041305   | Mar. 01, 2021    |
| 5                                 | Measurement Software | Farad        | EZ-EMC Ver.NB-03A1-01 | N/A        | N/A              |
| 6                                 | Cable                | N/A          | RG223                 | 12m        | Mar. 10, 2021    |

| Radiated Emissions - 9 kHz to 30 MHz |                      |              |                            |            |                  |
|--------------------------------------|----------------------|--------------|----------------------------|------------|------------------|
| Item                                 | Kind of Equipment    | Manufacturer | Type No.                   | Serial No. | Calibrated until |
| 1*                                   | Antenna              | EM           | EM-6876-1                  | 230        | Jan. 15, 2022    |
| 2                                    | Cable                | N/A          | RG400 (C-101(3m)+C-70(6m)) | N/A        | May 31, 2020     |
| 3                                    | EMI Test Receiver    | R&S          | ESCI                       | 100895     | Feb. 28, 2021    |
| 4                                    | Measurement Software | Farad        | EZ-EMC Ver.NB-03A1-01      | N/A        | N/A              |

| Radiated Emissions - 30 MHz to 1 GHz |                      |              |                            |             |                  |
|--------------------------------------|----------------------|--------------|----------------------------|-------------|------------------|
| Item                                 | Kind of Equipment    | Manufacturer | Type No.                   | Serial No.  | Calibrated until |
| 1                                    | Antenna              | Schwarzbeck  | VULB9160                   | 9160-3232   | Mar. 09, 2021    |
| 2*                                   | Amplifier            | HP           | 8447D                      | 2944A08742  | Mar. 01, 2021    |
| 3                                    | Receiver             | Agilent      | N9038A                     | MY52130039  | Aug. 03, 2020    |
| 4                                    | Cable                | emci         | LMR-400(30MHz-1GHz)(8m+5m) | N/A         | May 25, 2020     |
| 5                                    | Controller           | CT           | SC100                      | N/A         | N/A              |
| 6                                    | Controller           | MF           | MF-7802                    | MF780208416 | N/A              |
| 7                                    | Measurement Software | Farad        | EZ-EMC Ver.NB-03A1-01      | N/A         | N/A              |

| Radiated Emissions - Above 1 GHz |                                     |                |                          |               |                  |
|----------------------------------|-------------------------------------|----------------|--------------------------|---------------|------------------|
| Item                             | Kind of Equipment                   | Manufacturer   | Type No.                 | Serial No.    | Calibrated until |
| 1                                | Double Ridged Guide Antenna         | ETS            | 3115                     | 75846         | Mar. 19, 2021    |
| 2                                | Broad-Band Horn Antenna             | Schwarzbeck    | BBHA 9170                | 9170319       | Jun. 23, 2020    |
| 3                                | Amplifier                           | Agilent        | 8449B                    | 3008A02584    | Aug. 03, 2020    |
| 4                                | Microwave Preamplifier With Adaptor | EMC INSTRUMENT | EMC2654045               | 980039 & HA01 | Mar. 07, 2021    |
| 5                                | Receiver                            | Agilent        | N9038A                   | MY52130039    | Aug. 03, 2020    |
| 6                                | Controller                          | CT             | SC100                    | N/A           | N/A              |
| 7                                | Controller                          | MF             | MF-7802                  | MF780208416   | N/A              |
| 8                                | Cable                               | mitron         | RWLP50-4.0A-KJ-S MSM-12M | N/A           | Nov. 25, 2020    |
| 9                                | Measurement Software                | Farad          | EZ-EMC Ver.NB-03A1-01    | N/A           | N/A              |

**Number of Hopping Frequency &  
Average Time of Occupancy &  
Hopping Channel Separation Measurement &  
Bandwidth &  
Maximum Output Power &  
Antenna Conducted Spurious Emission**

| Item | Kind of Equipment     | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|-----------------------|--------------|----------|------------|------------------|
| 1    | Spectrum Analyzer     | R&S          | FSP40    | 100185     | Aug. 03, 2020    |
| 2    | EXA Spectrum Analyzer | Keysight     | N9010A   | MY56480488 | Mar. 01, 2021    |


Remark "N/A" denotes no model name, serial no. or calibration specified.

"\*" calibration period of equipment list is three year.

Except \* item, all calibration period of equipment list is one year.

## **APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS**

Test Mode: TX Mode Channel 18\_UHD 2M 8DPSK

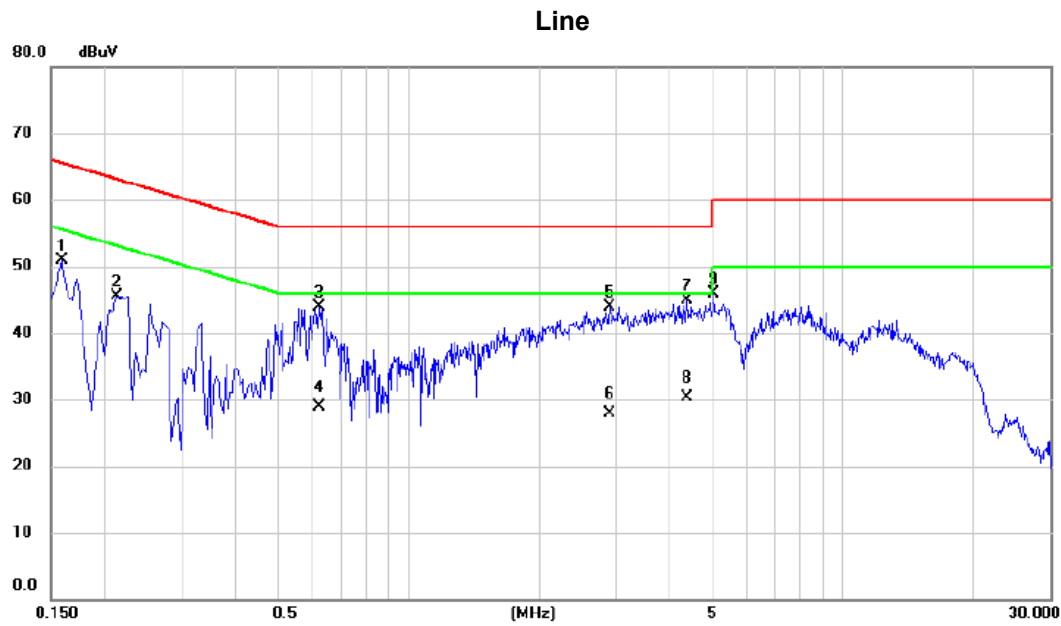

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Margin |          |         |
|-----|-----|--------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV        | dBuV  | dB     | Detector | Comment |
| 1   |     | 0.1590 | 41.16         | 9.73           | 50.89       | 65.52 | -14.63 | peak     |         |
| 2   |     | 0.2130 | 35.70         | 9.90           | 45.60       | 63.09 | -17.49 | peak     |         |
| 3   |     | 0.6225 | 33.95         | 9.94           | 43.89       | 56.00 | -12.11 | peak     |         |
| 4   |     | 0.6225 | 18.90         | 9.94           | 28.84       | 46.00 | -17.16 | AVG      |         |
| 5   |     | 2.9040 | 33.77         | 10.17          | 43.94       | 56.00 | -12.06 | peak     |         |
| 6   |     | 2.9040 | 17.80         | 10.17          | 27.97       | 46.00 | -18.03 | AVG      |         |
| 7   | *   | 4.3755 | 34.61         | 10.29          | 44.90       | 56.00 | -11.10 | peak     |         |
| 8   |     | 4.3755 | 20.10         | 10.29          | 30.39       | 46.00 | -15.61 | AVG      |         |
| 9   |     | 5.0324 | 35.63         | 10.33          | 45.96       | 60.00 | -14.04 | peak     |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 18\_UHD 2M 8DPSK

## Neutral

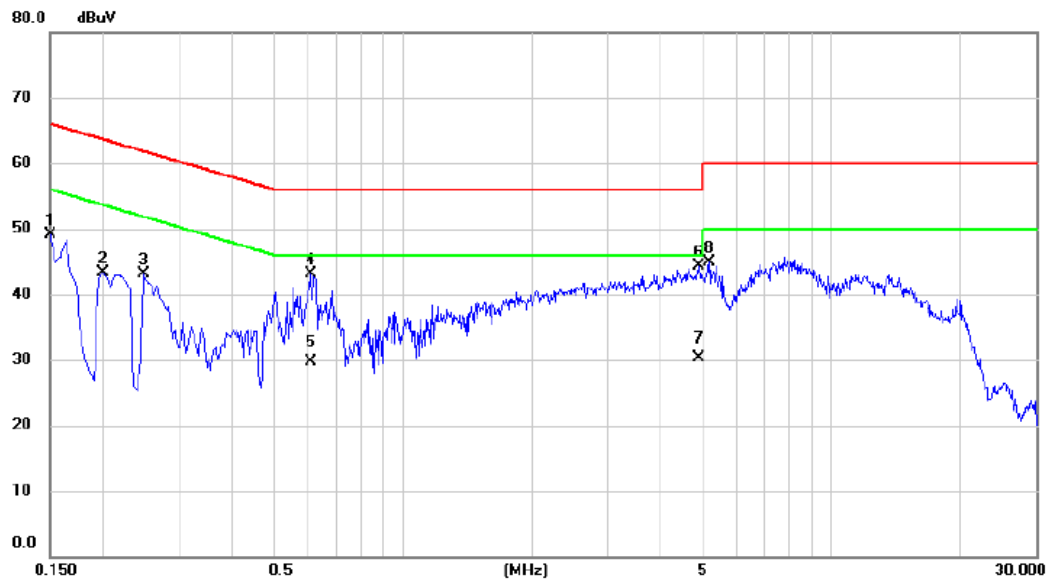

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1500       | 39.35                    | 9.74                    | 49.09                    | 66.00         | -16.91       | peak     |         |
| 2   |     | 0.1995       | 33.31                    | 10.01                   | 43.32                    | 63.63         | -20.31       | peak     |         |
| 3   |     | 0.2490       | 33.06                    | 9.97                    | 43.03                    | 61.79         | -18.76       | peak     |         |
| 4   |     | 0.6090       | 32.97                    | 10.18                   | 43.15                    | 56.00         | -12.85       | peak     |         |
| 5   |     | 0.6090       | 19.50                    | 10.18                   | 29.68                    | 46.00         | -16.32       | AVG      |         |
| 6   | *   | 4.9020       | 33.66                    | 10.67                   | 44.33                    | 56.00         | -11.67       | peak     |         |
| 7   |     | 4.9020       | 19.60                    | 10.67                   | 30.27                    | 46.00         | -15.73       | AVG      |         |
| 8   |     | 5.1855       | 34.19                    | 10.69                   | 44.88                    | 60.00         | -15.12       | peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX B - RADIATED EMISSION - 9 KHZ-30 MHZ**

Test Mode: TX Mode Channel 18\_UHD 2M 8DPSK

Ant 0°

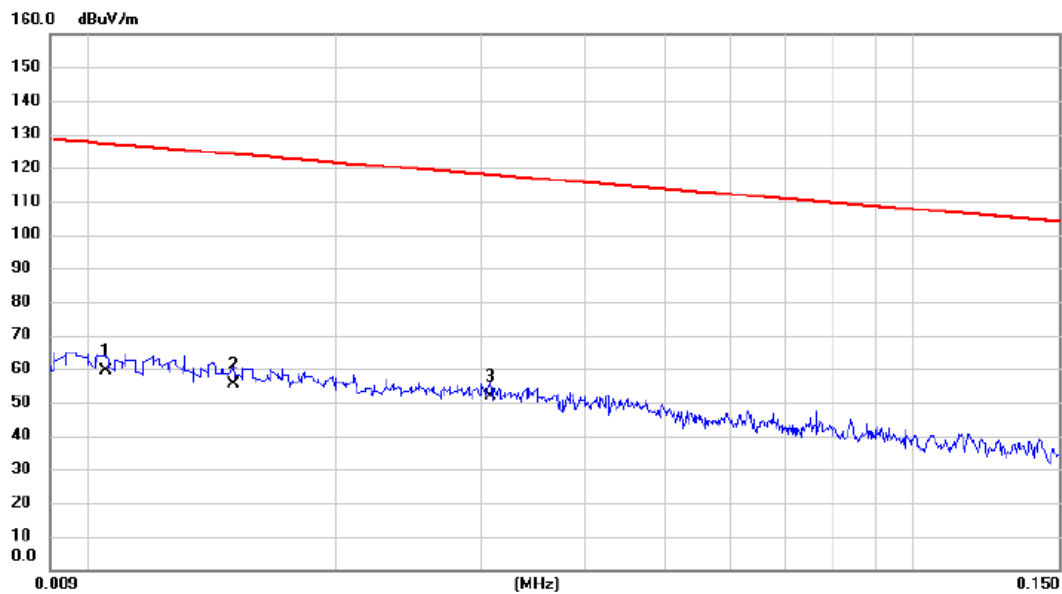

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 0.011        | 42.65                    | 16.67                   | 59.32                      | 127.18          | -67.86       | AVG      |         |
| 2       | 0.015        | 40.13                    | 15.32                   | 55.45                      | 124.08          | -68.63       | AVG      |         |
| 3 *     | 0.031        | 38.10                    | 13.86                   | 51.96                      | 117.83          | -65.87       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 18\_UHD 2M 8DPSK

Ant 0°

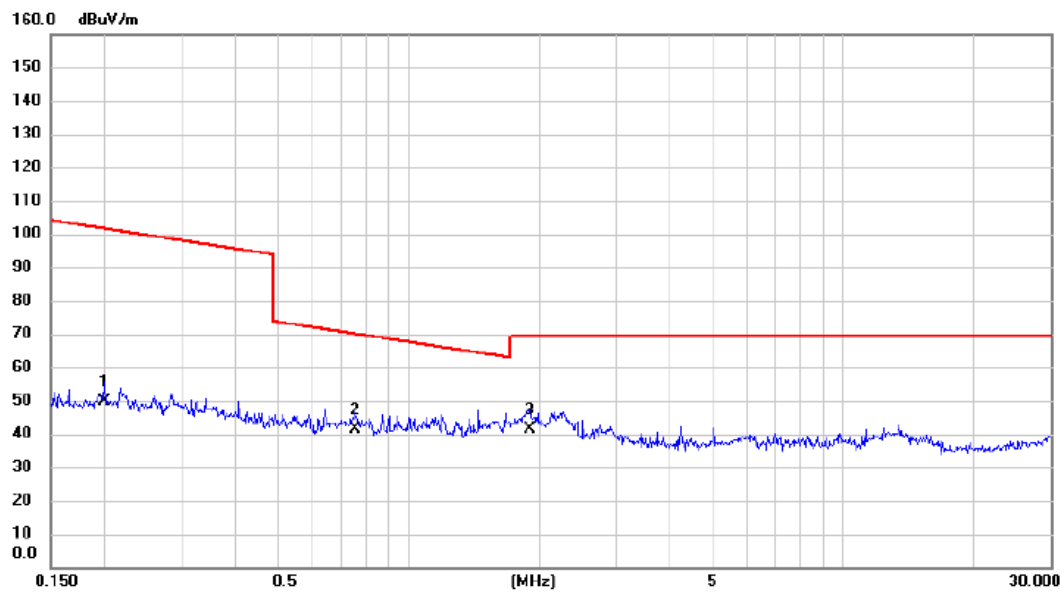

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 0.200 | 36.25         | 13.61          | 49.86       | 101.61 | -51.75 | AVG      |         |
| 2   |     | 0.755 | 28.65         | 12.58          | 41.23       | 70.05  | -28.82 | QP       |         |
| 3   | *   | 1.898 | 29.46         | 11.88          | 41.34       | 69.54  | -28.20 | QP       |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 18\_UHD 2M 8DPSK

Ant 90°

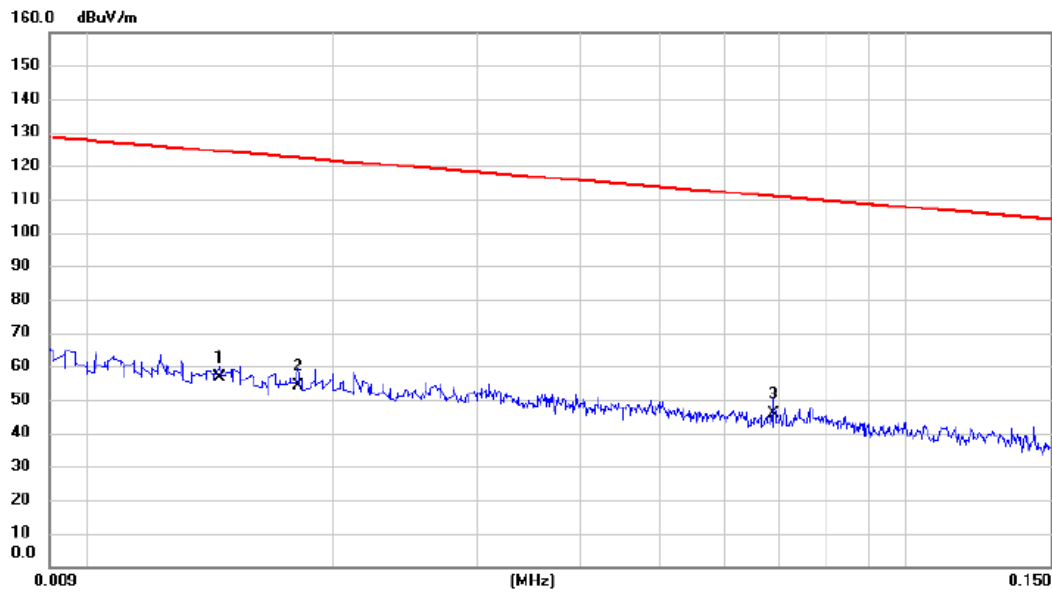

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |                  |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|------------------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector Comment |
| 1   |     | 0.015 | 41.02         | 15.47          | 56.49       | 124.38 | -67.89 | AVG              |
| 2   |     | 0.018 | 40.01         | 14.39          | 54.40       | 122.45 | -68.05 | AVG              |
| 3   | *   | 0.069 | 32.01         | 13.63          | 45.64       | 110.83 | -65.19 | AVG              |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 18\_UHD 2M 8DPSK

Ant 90°

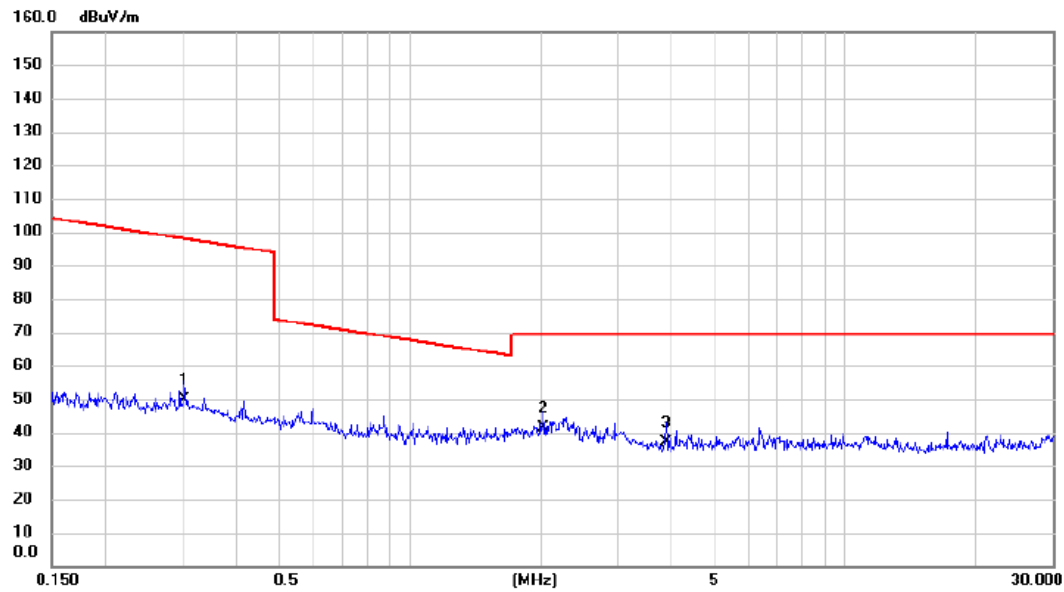

| No. Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|---------|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|         | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1       | 0.303 | 36.25         | 13.53          | 49.78       | 97.96  | -48.18 | AVG      |         |
| 2 *     | 2.033 | 29.56         | 11.80          | 41.36       | 69.54  | -28.18 | QP       |         |
| 3       | 3.881 | 26.15         | 10.98          | 37.13       | 69.54  | -32.41 | QP       |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ**

Test Mode: TX Mode Channel 18\_UHD 2M 8DPSK

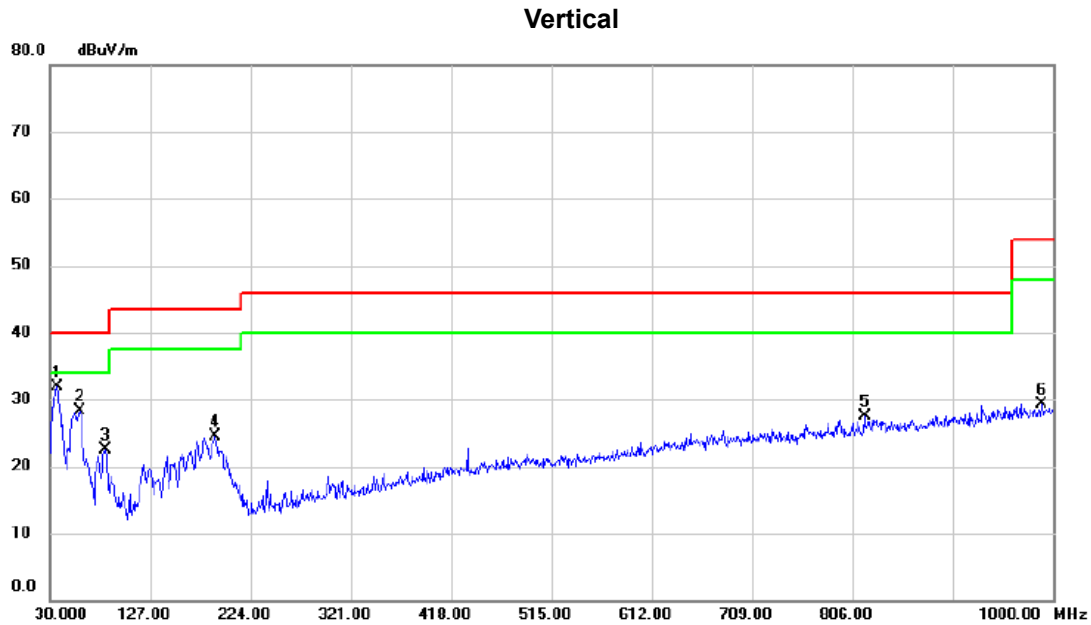


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 36.790       | 46.23                    | -14.41                  | 31.82                      | 40.00           | -8.18        | peak     |         |
| 2   |     | 59.100       | 42.89                    | -14.66                  | 28.23                      | 40.00           | -11.77       | peak     |         |
| 3   |     | 83.350       | 39.85                    | -17.38                  | 22.47                      | 40.00           | -17.53       | peak     |         |
| 4   |     | 190.050      | 39.02                    | -14.60                  | 24.42                      | 43.50           | -19.08       | peak     |         |
| 5   |     | 817.640      | 30.73                    | -3.19                   | 27.54                      | 46.00           | -18.46       | peak     |         |
| 6   |     | 989.330      | 29.55                    | -0.15                   | 29.40                      | 54.00           | -24.60       | peak     |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 18\_UHD 2M 8DPSK

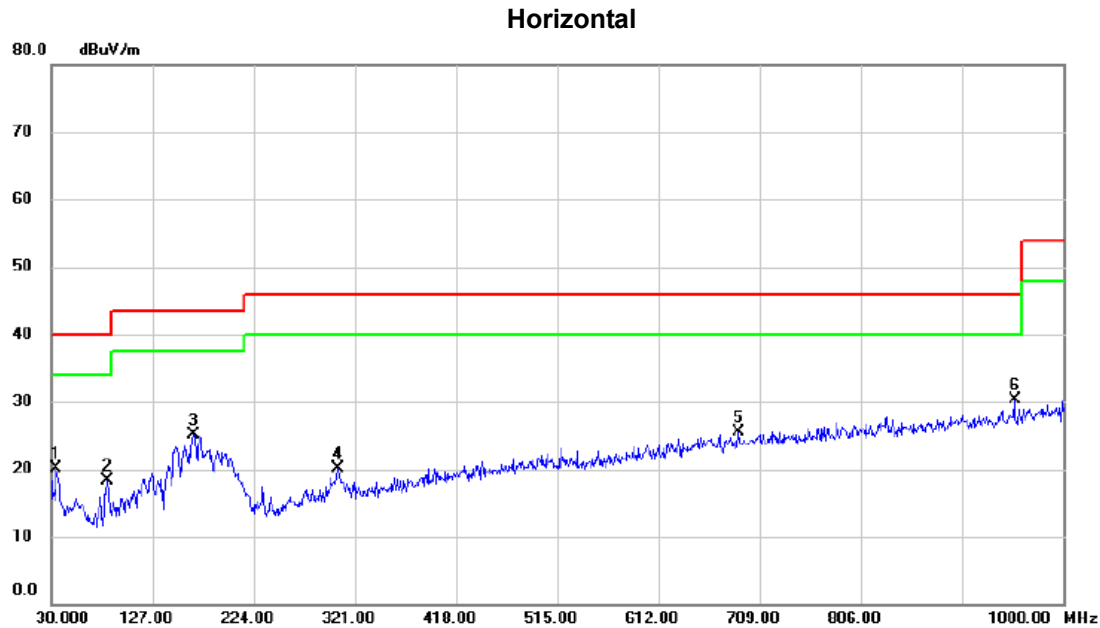

| No. | Mk. | Freq.   | Reading | Correct | Measure- | Limit  | Margin |          |         |
|-----|-----|---------|---------|---------|----------|--------|--------|----------|---------|
|     |     | MHz     | Level   | Factor  | ment     |        |        | Detector | Comment |
|     |     |         | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 34.850  | 34.72   | -14.71  | 20.01    | 40.00  | -19.99 | peak     |         |
| 2   |     | 83.350  | 35.76   | -17.38  | 18.38    | 40.00  | -21.62 | peak     |         |
| 3   |     | 165.800 | 37.14   | -11.95  | 25.19    | 43.50  | -18.31 | peak     |         |
| 4   |     | 304.510 | 31.71   | -11.56  | 20.15    | 46.00  | -25.85 | peak     |         |
| 5   |     | 688.630 | 30.07   | -4.61   | 25.46    | 46.00  | -20.54 | peak     |         |
| 6   | *   | 953.440 | 31.10   | -0.82   | 30.28    | 46.00  | -15.72 | peak     |         |


## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ**

Test Mode: TX 2404 MHz \_CH00\_UHD 2M GFSK (1Mbps)

## Vertical

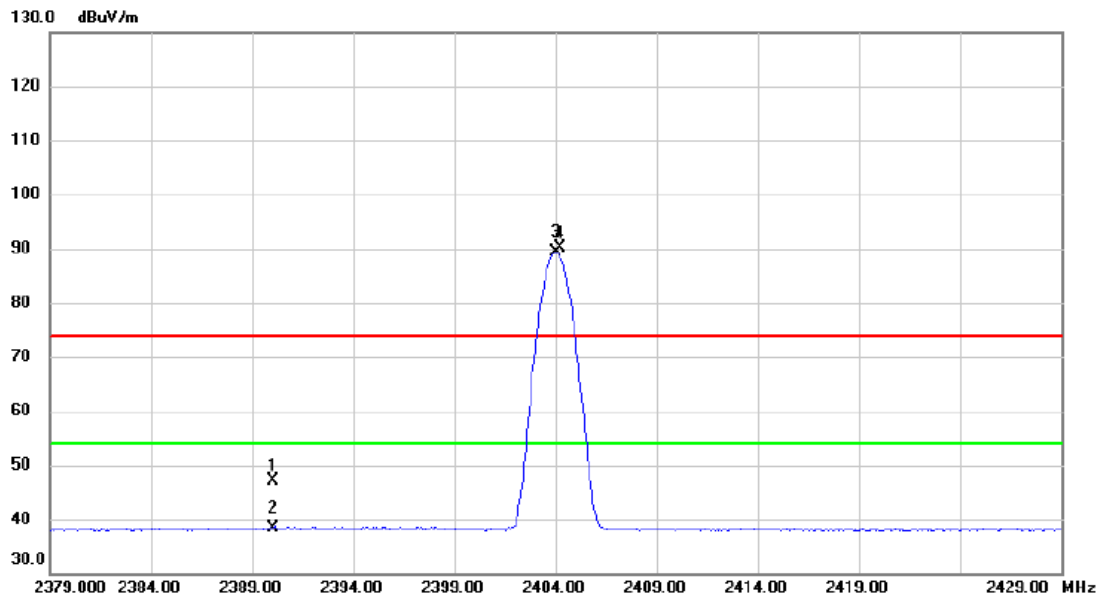

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 2390.000     | 40.36                    | 6.89                    | 47.25                      | 74.00           | -26.75       | peak     |          |
| 2   |     | 2390.000     | 31.40                    | 6.89                    | 38.29                      | 54.00           | -15.71       | AVG      |          |
| 3   | *   | 2404.000     | 82.54                    | 6.88                    | 89.42                      | 54.00           | 35.42        | AVG      | No Limit |
| 4   | X   | 2404.250     | 83.21                    | 6.88                    | 90.09                      | 74.00           | 16.09        | peak     | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|            |                                       |
|------------|---------------------------------------|
| Test Mode: | TX 2404 MHz _CH00_UHD 2M GFSK (1Mbps) |
|------------|---------------------------------------|

## Vertical

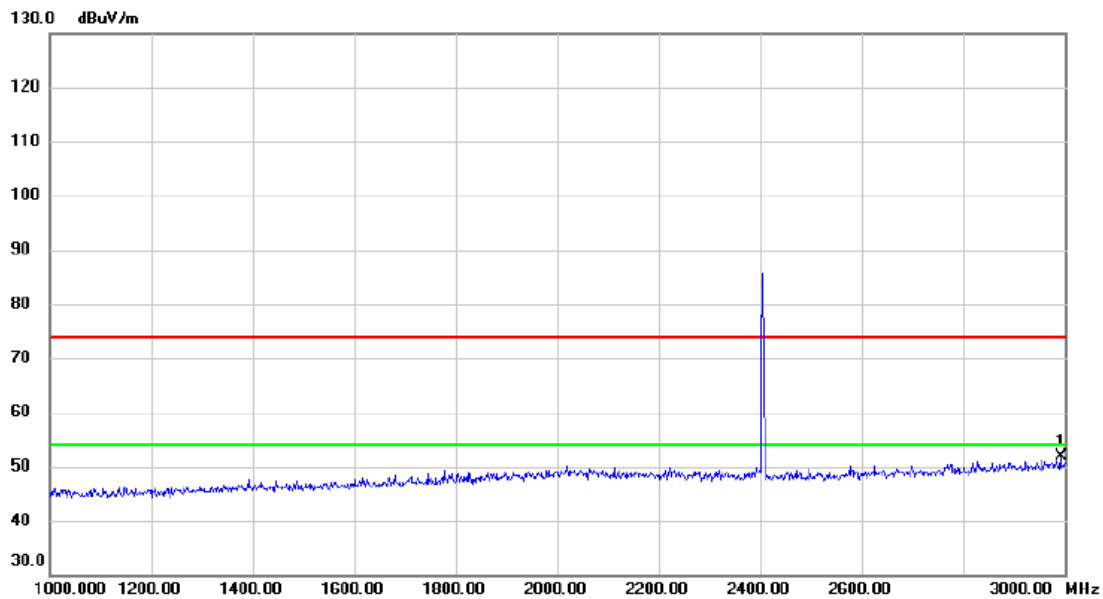


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2992.000 | 42.41         | 9.37           | 51.78       | 74.00  | -22.22 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|            |                                       |
|------------|---------------------------------------|
| Test Mode: | TX 2404 MHz _CH00_UHD 2M GFSK (1Mbps) |
|------------|---------------------------------------|

## Vertical

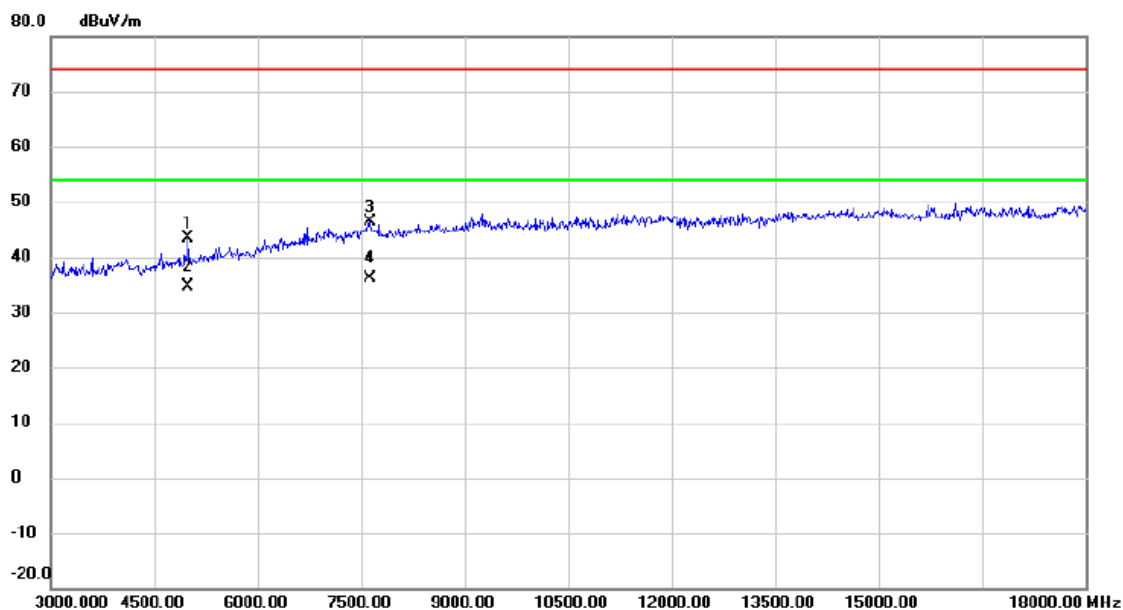


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 4995.000     | 39.34                    | 4.12                    | 43.46                      | 74.00           | -30.54       | peak     |         |
| 2   |     | 4995.000     | 30.59                    | 4.12                    | 34.71                      | 54.00           | -19.29       | AVG      |         |
| 3   |     | 7635.000     | 36.73                    | 9.53                    | 46.26                      | 74.00           | -27.74       | peak     |         |
| 4   | *   | 7635.000     | 26.54                    | 9.53                    | 36.07                      | 54.00           | -17.93       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M GFSK (1Mbps)

## Vertical

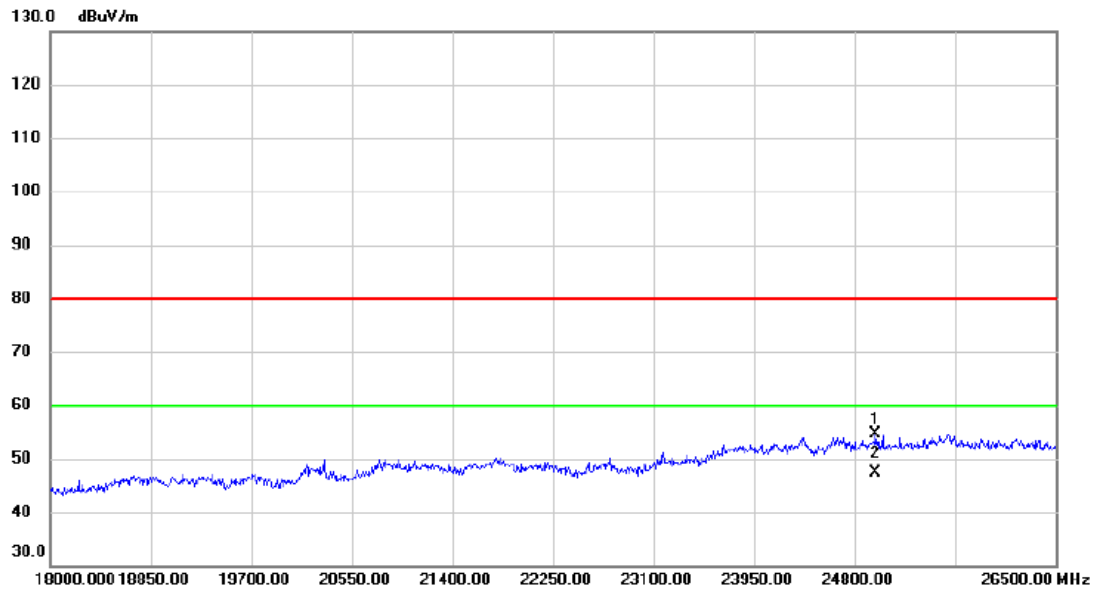


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 24978.50     | 24.19                    | 30.50                   | 54.69                      | 80.00           | -25.31       | peak     |         |
| 2   | *   | 24978.50     | 16.97                    | 30.50                   | 47.47                      | 60.00           | -12.53       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M GFSK (1Mbps)

## Horizontal

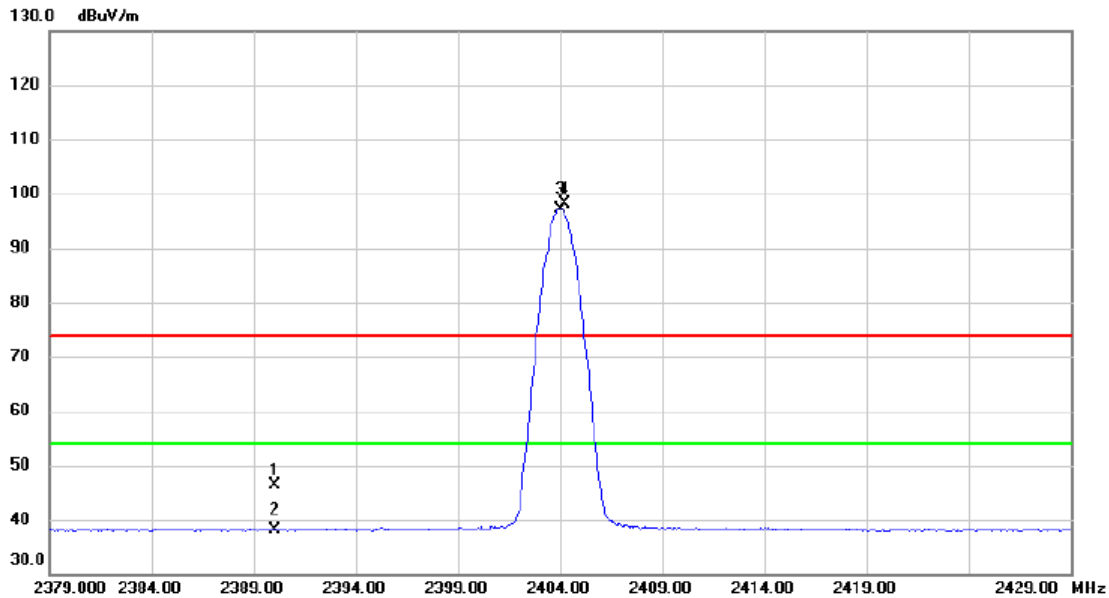


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 2390.000     | 39.47                    | 6.89                    | 46.36                      | 74.00           | -27.64       | peak     |          |
| 2   |     | 2390.000     | 31.28                    | 6.89                    | 38.17                      | 54.00           | -15.83       | AVG      |          |
| 3   | *   | 2404.050     | 90.31                    | 6.88                    | 97.19                      | 54.00           | 43.19        | AVG      | No Limit |
| 4   | X   | 2404.250     | 91.14                    | 6.88                    | 98.02                      | 74.00           | 24.02        | peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M GFSK (1Mbps)

## Horizontal

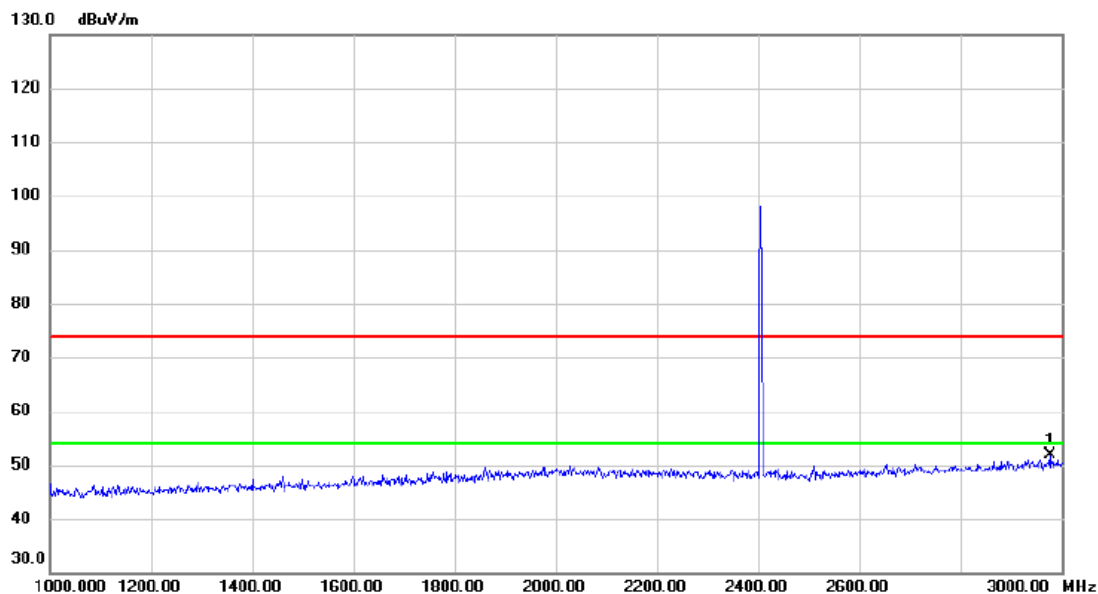


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2976.000 | 42.57         | 9.28           | 51.85        | 74.00  | -22.15 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M GFSK (1Mbps)

## Horizontal

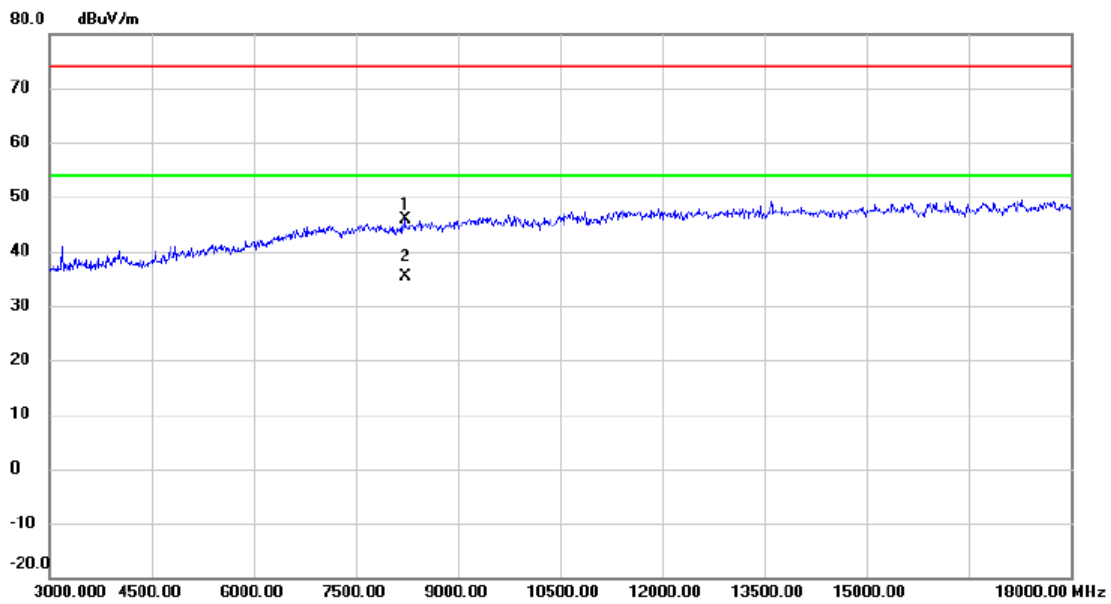


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8220.000     | 36.18                    | 9.73                    | 45.91                      | 74.00           | -28.09       | peak     |         |
| 2   | *   | 8220.000     | 25.69                    | 9.73                    | 35.42                      | 54.00           | -18.58       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|            |                                       |
|------------|---------------------------------------|
| Test Mode: | TX 2404 MHz _CH00_UHD 2M GFSK (1Mbps) |
|------------|---------------------------------------|

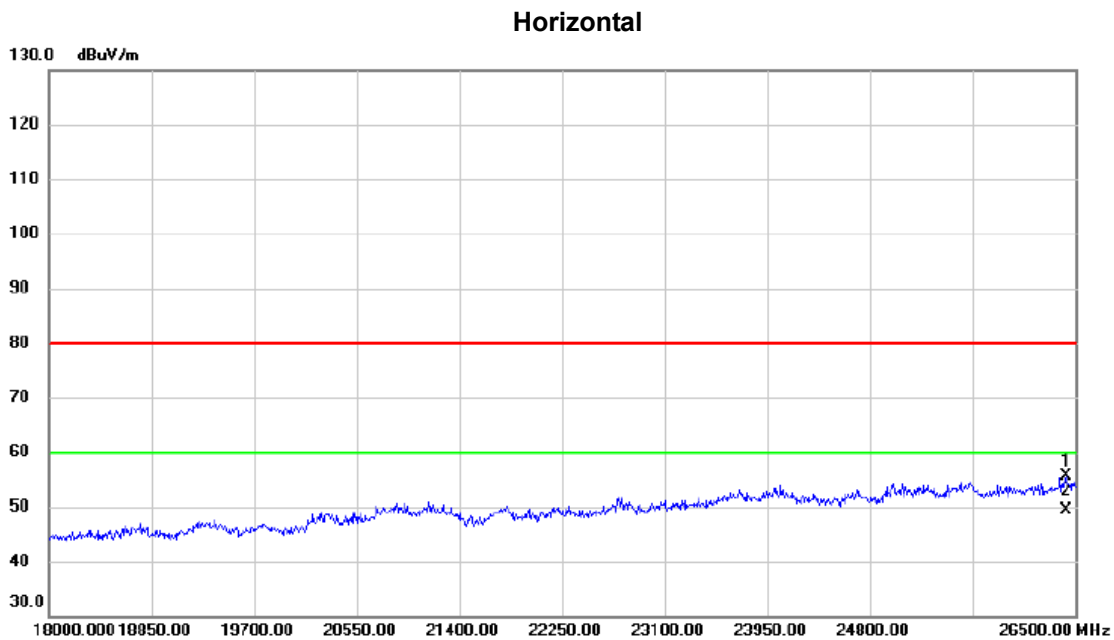


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 26423.50     | 23.68                    | 31.93                   | 55.61                      | 80.00           | -24.39       | peak     |         |
| 2   | *   | 26423.50     | 17.39                    | 31.93                   | 49.32                      | 60.00           | -10.68       | AVG      |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M GFSK (1Mbps)

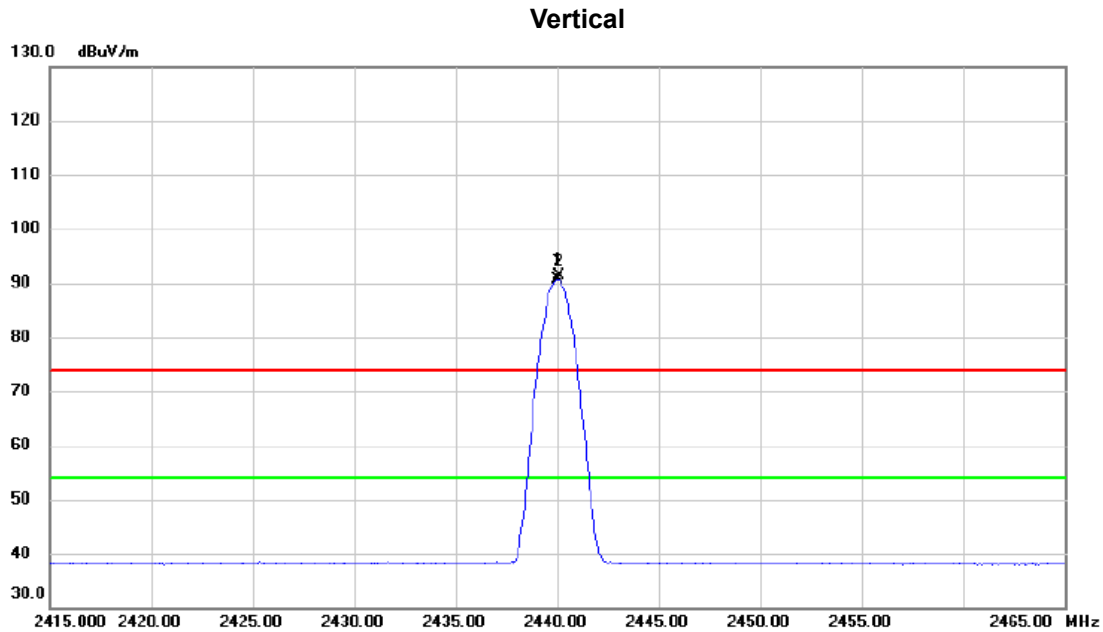


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment  |
| 1   | *   | 2440.000 | 83.78         | 6.84           | 90.62       | 54.00  | 36.62  | AVG      | No Limit |
| 2   | X   | 2440.100 | 84.52         | 6.84           | 91.36       | 74.00  | 17.36  | peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|            |                                       |
|------------|---------------------------------------|
| Test Mode: | TX 2440 MHz _CH18_UHD 2M GFSK (1Mbps) |
|------------|---------------------------------------|

## Vertical

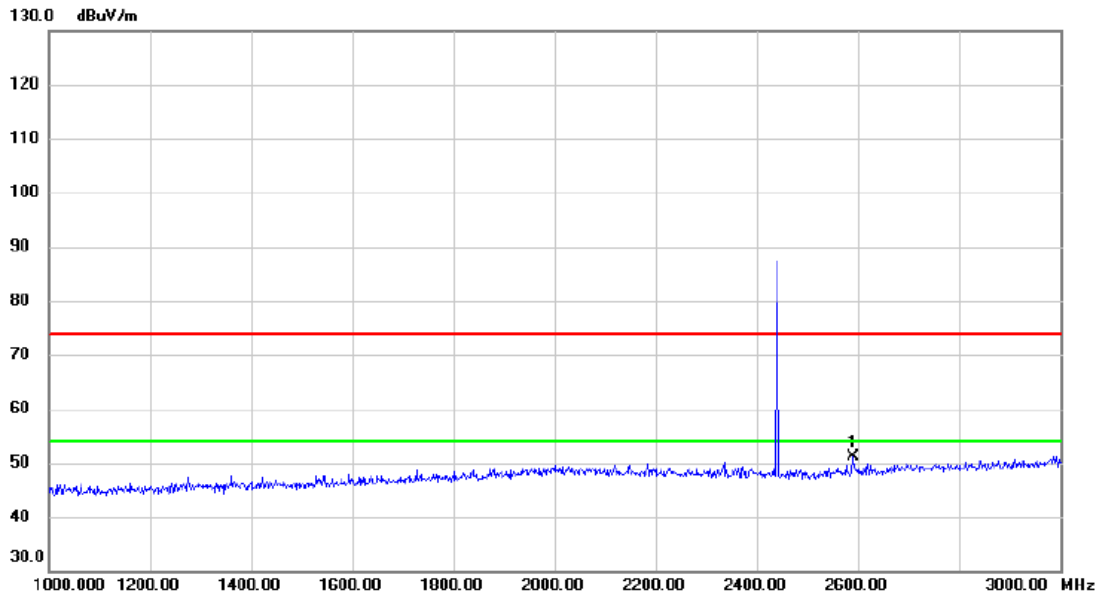


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2590.000 | 43.86         | 7.25           | 51.11       | 74.00  | -22.89 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|            |                                       |
|------------|---------------------------------------|
| Test Mode: | TX 2440 MHz _CH18_UHD 2M GFSK (1Mbps) |
|------------|---------------------------------------|

## Vertical

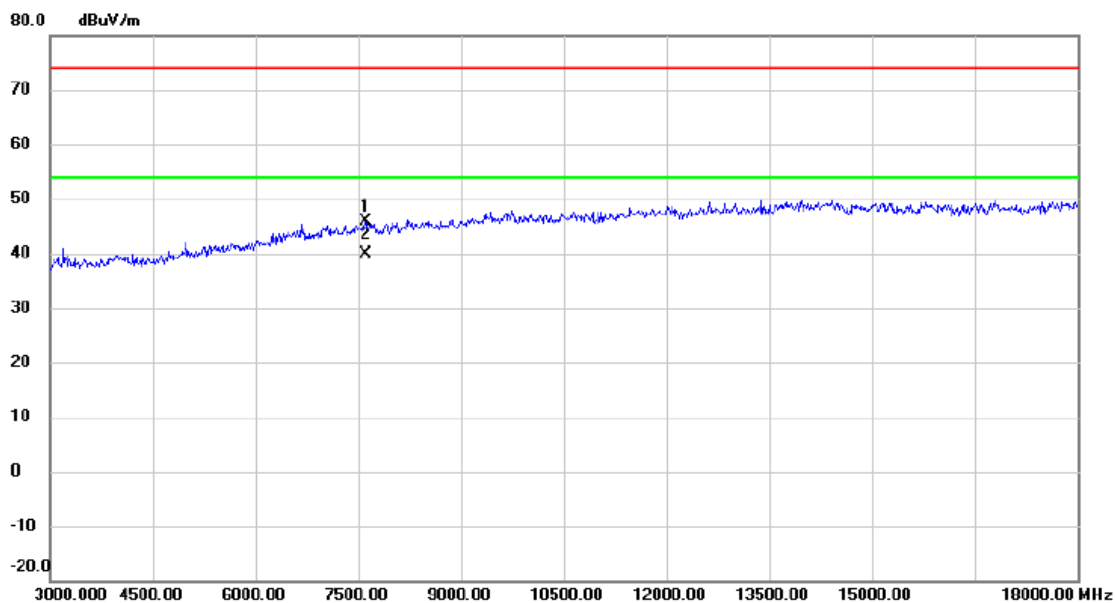

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7605.000     | 36.25                    | 9.55                    | 45.80                      | 74.00           | -28.20       | peak     |         |
| 2   | *   | 7605.000     | 30.25                    | 9.55                    | 39.80                      | 54.00           | -14.20       | AVG      |         |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M GFSK (1Mbps)

## Vertical

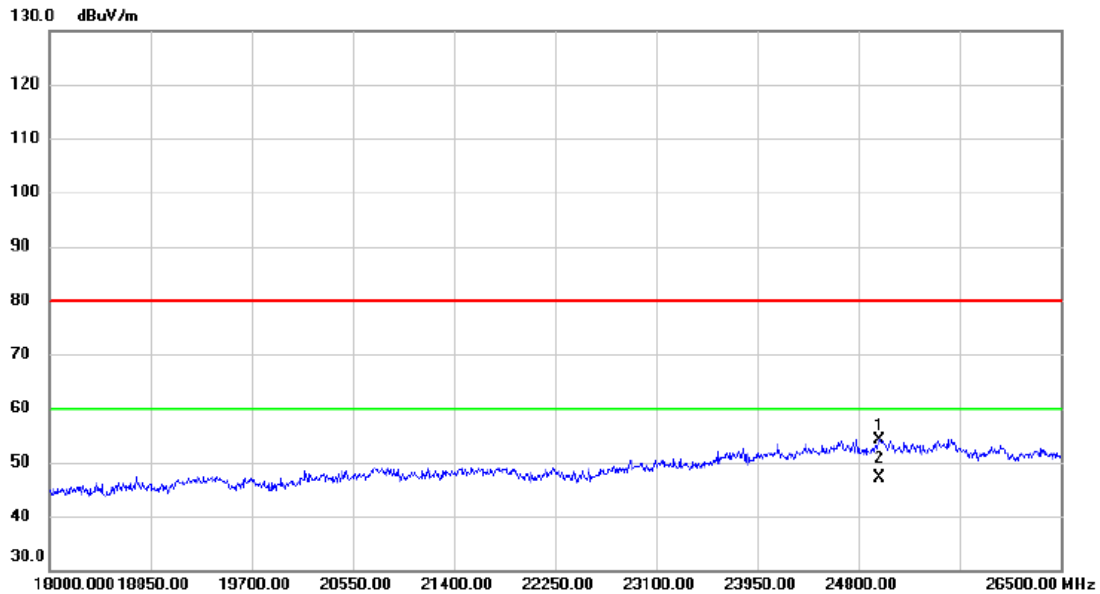


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 24978.50     | 23.64                    | 30.50                   | 54.14                      | 80.00           | -25.86       | peak     |         |
| 2   | *   | 24978.50     | 16.58                    | 30.50                   | 47.08                      | 60.00           | -12.92       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M GFSK (1Mbps)

## Horizontal

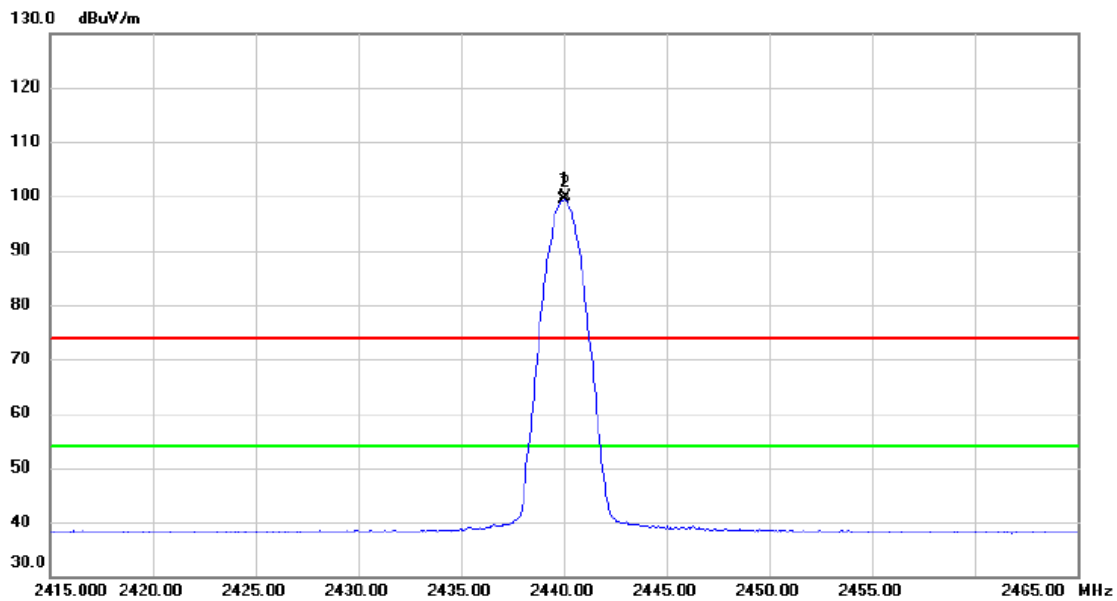


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 2440.000     | 92.47                    | 6.84                    | 99.31                      | 54.00           | 45.31        | AVG      | No Limit |
| 2   | X   | 2440.100     | 93.15                    | 6.84                    | 99.99                      | 74.00           | 25.99        | peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M GFSK (1Mbps)

## Horizontal

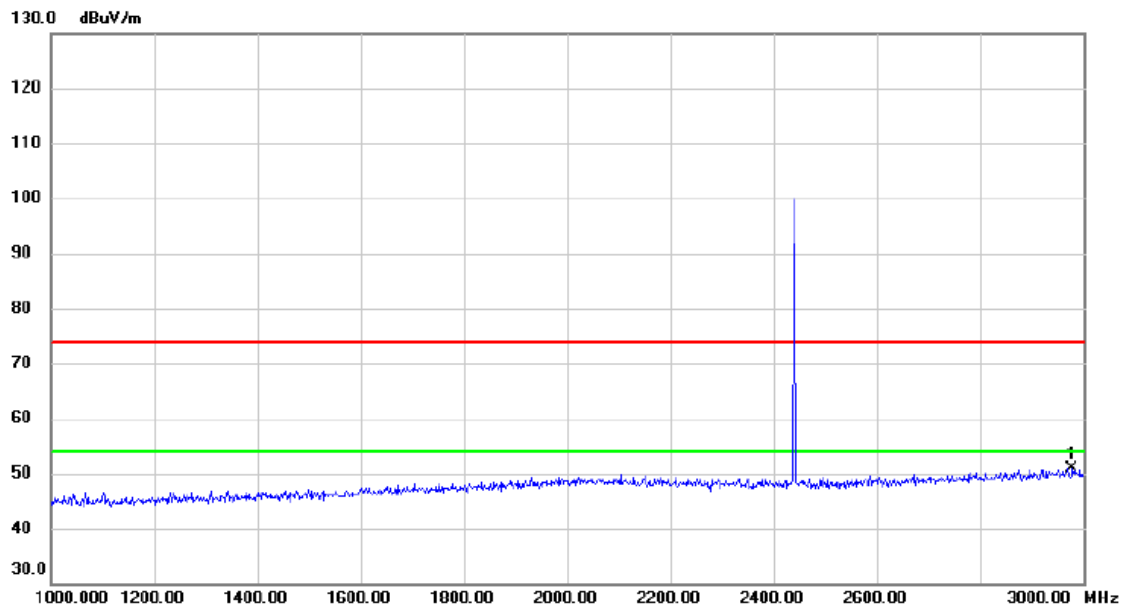


| No. Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Margin |          |         |
|---------|----------|---------------|----------------|--------------|--------|--------|----------|---------|
|         | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector | Comment |
| 1 *     | 2978.000 | 41.69         | 9.29           | 50.98        | 74.00  | -23.02 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M GFSK (1Mbps)

## Horizontal

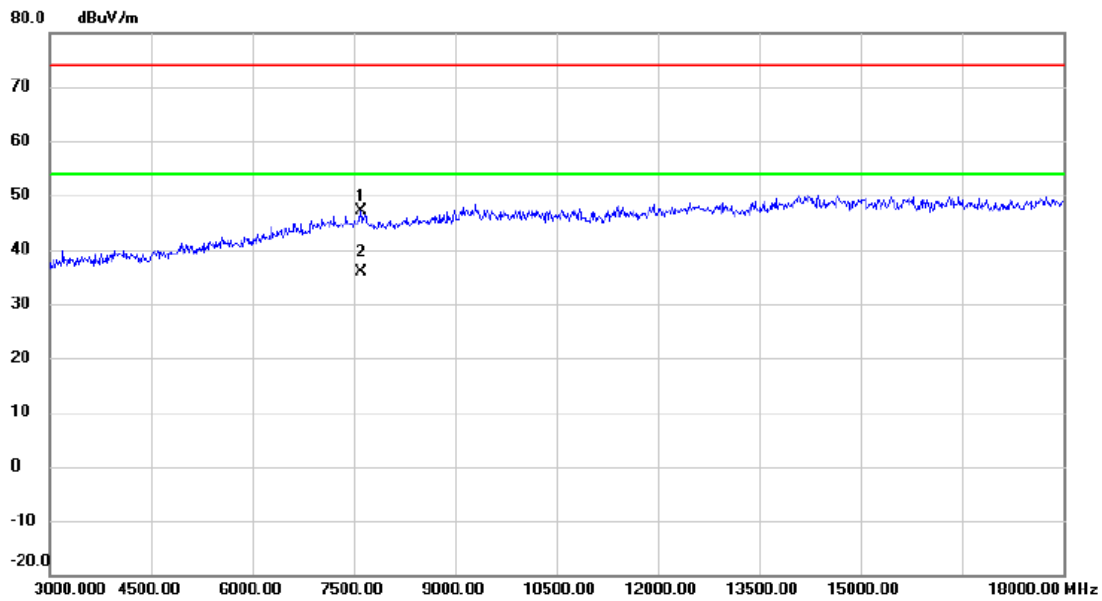


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 7605.000 | 37.46         | 9.55           | 47.01       | 74.00  | -26.99 | peak     |         |
| 2   | *   | 7605.000 | 26.45         | 9.55           | 36.00       | 54.00  | -18.00 | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M GFSK (1Mbps)

## Horizontal

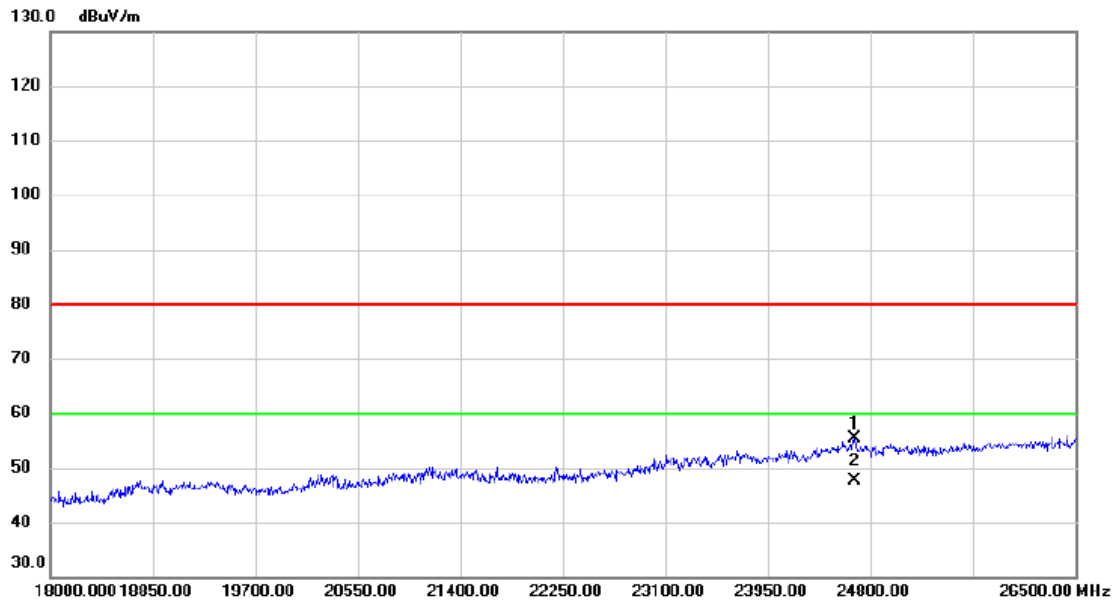


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 24672.50     | 25.38                    | 30.07                   | 55.45                      | 80.00           | -24.55       | peak     |         |
| 2   | *   | 24672.50     | 17.58                    | 30.07                   | 47.65                      | 60.00           | -12.35       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (1Mbps)

## Vertical

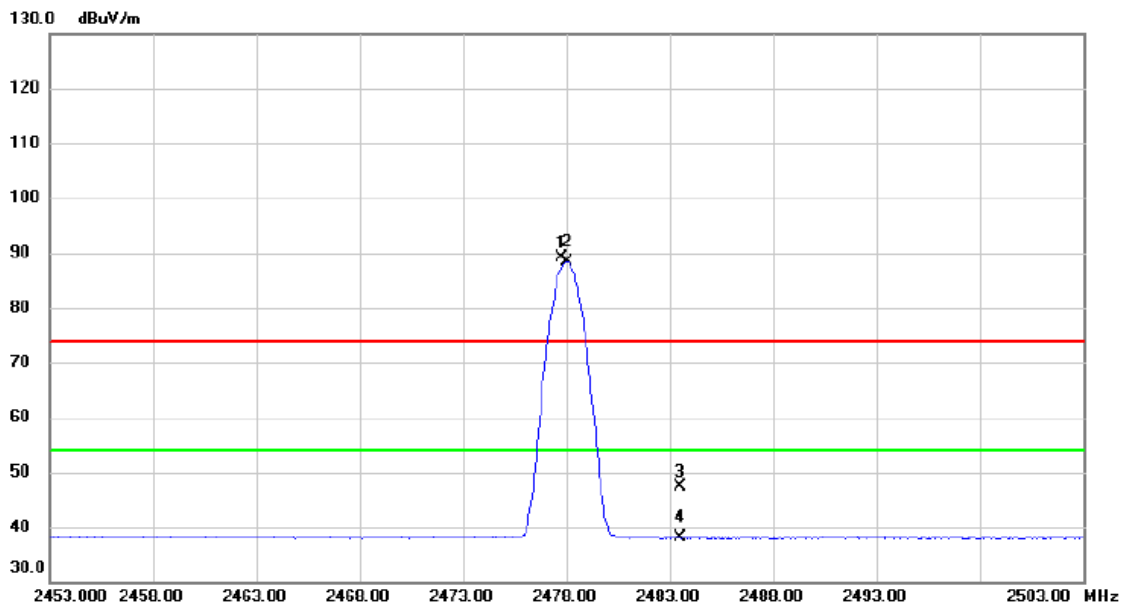


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 2477.750     | 82.32                    | 6.79                    | 89.11                      | 74.00           | 15.11        | peak     | No Limit |
| 2   | *   | 2478.050     | 81.57                    | 6.80                    | 88.37                      | 54.00           | 34.37        | AVG      | No Limit |
| 3   |     | 2483.500     | 40.68                    | 6.80                    | 47.48                      | 74.00           | -26.52       | peak     |          |
| 4   |     | 2483.500     | 31.21                    | 6.80                    | 38.01                      | 54.00           | -15.99       | AVG      |          |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (1Mbps)

## Vertical

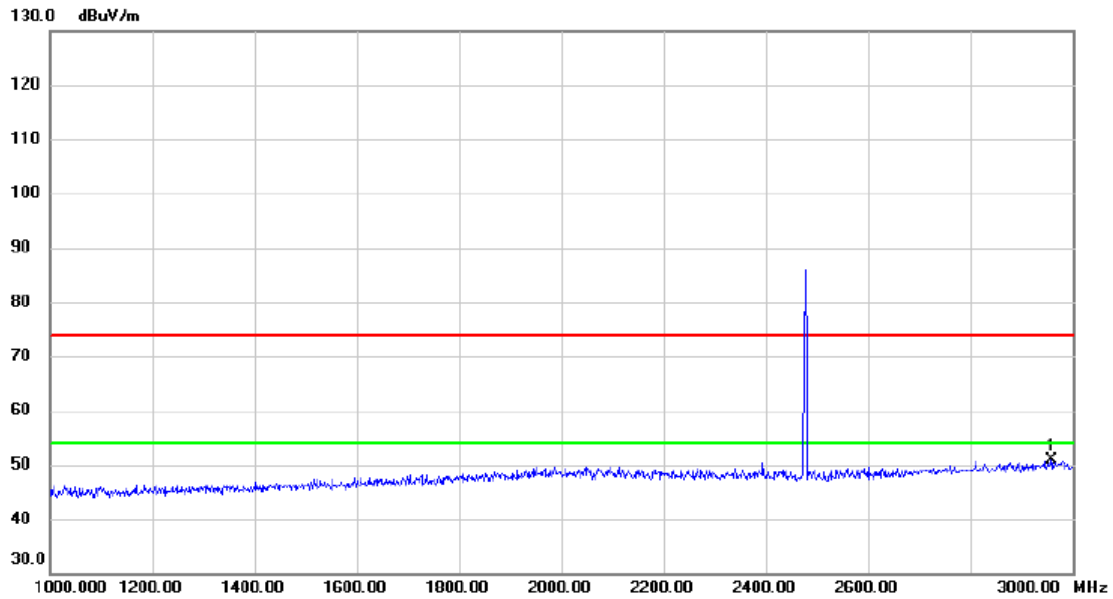


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2958.000 | 41.72         | 9.17           | 50.89       | 74.00  | -23.11 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (1Mbps)

## Vertical

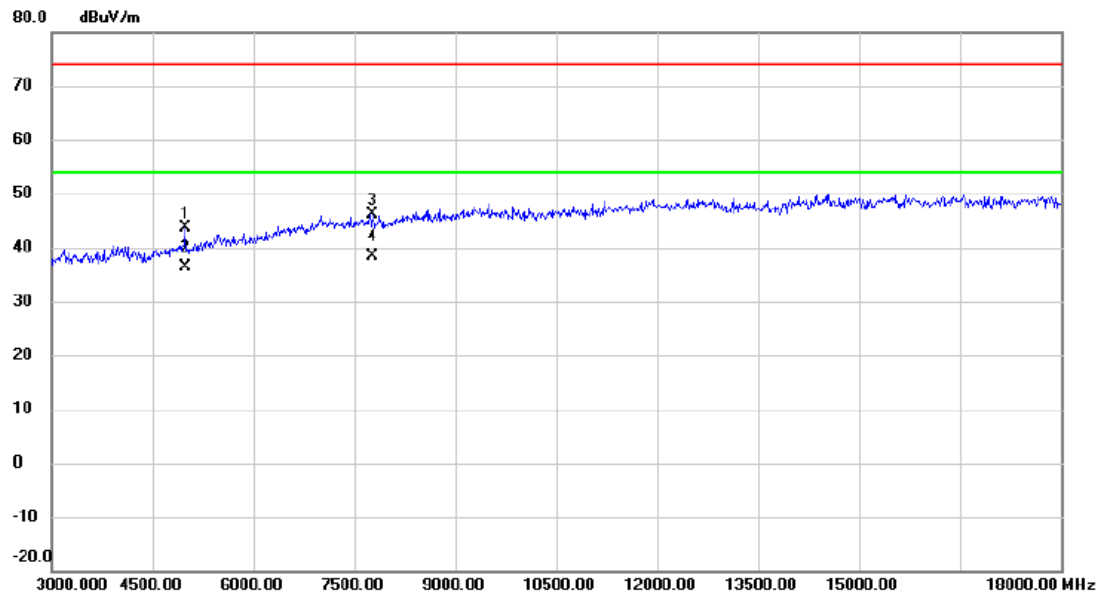


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 4980.000 | 39.56         | 4.07           | 43.63       | 74.00  | -30.37 | peak     |         |
| 2   |     | 4980.000 | 32.40         | 4.07           | 36.47       | 54.00  | -17.53 | AVG      |         |
| 3   |     | 7770.000 | 36.66         | 9.49           | 46.15       | 74.00  | -27.85 | peak     |         |
| 4 * |     | 7770.000 | 28.78         | 9.49           | 38.27       | 54.00  | -15.73 | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (1Mbps)

## Vertical

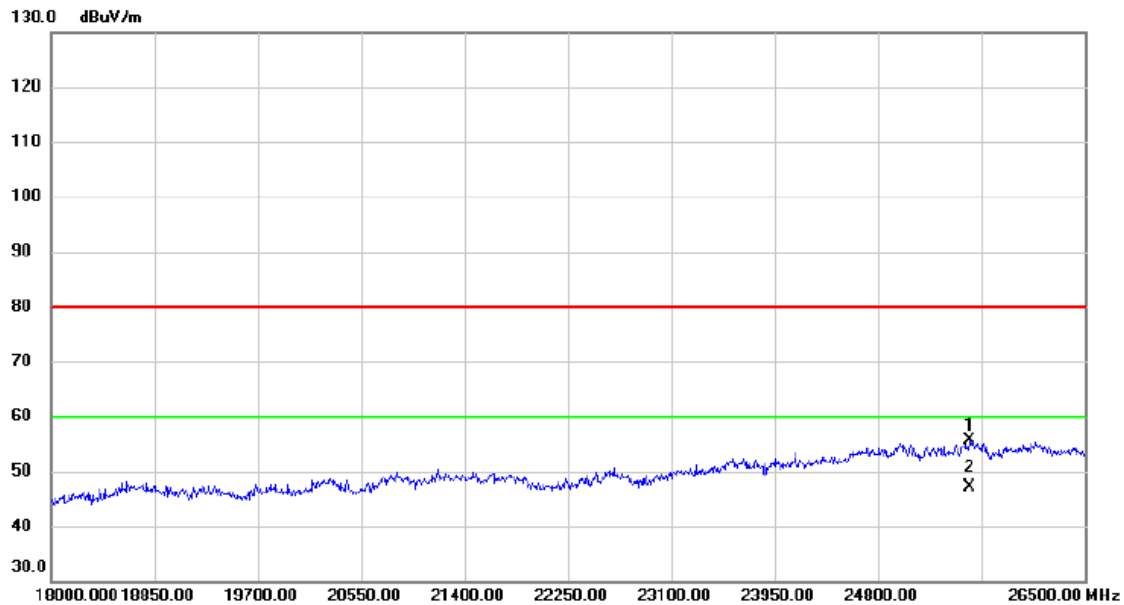


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 25548.00     | 25.47                    | 30.11                   | 55.58                      | 80.00           | -24.42       | peak     |         |
| 2   | *   | 25548.00     | 16.93                    | 30.11                   | 47.04                      | 60.00           | -12.96       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (1Mbps)

## Horizontal

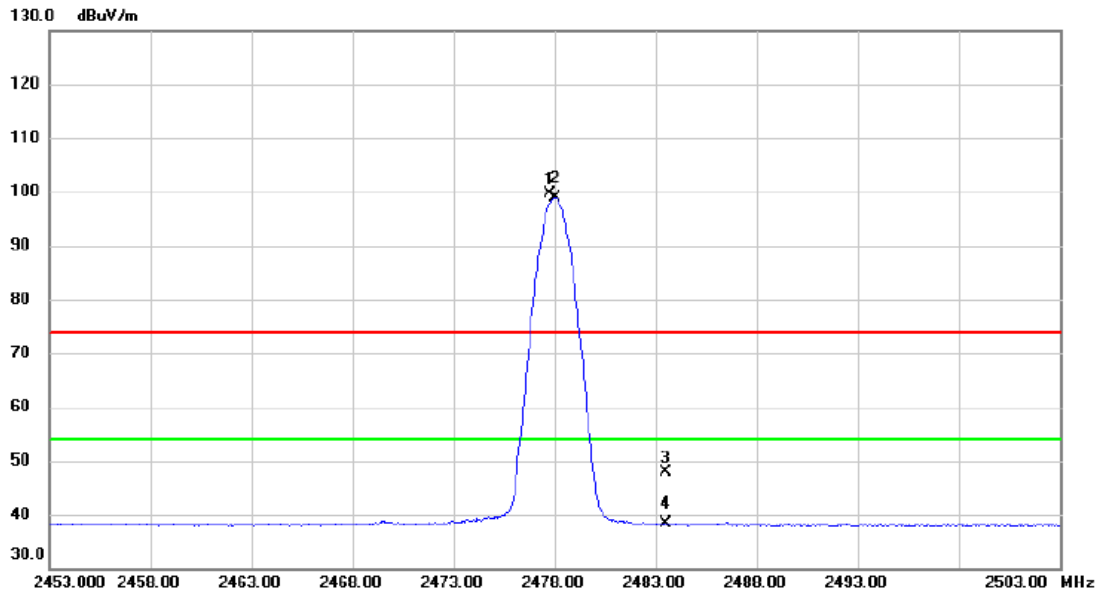

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 2477.750     | 92.84                    | 6.79                    | 99.63                      | 74.00           | 25.63        | peak     | No Limit |
| 2   | *   | 2478.050     | 92.10                    | 6.80                    | 98.90                      | 54.00           | 44.90        | AVG      | No Limit |
| 3   |     | 2483.500     | 41.13                    | 6.80                    | 47.93                      | 74.00           | -26.07       | peak     |          |
| 4   |     | 2483.500     | 31.47                    | 6.80                    | 38.27                      | 54.00           | -15.73       | AVG      |          |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (1Mbps)

## Horizontal

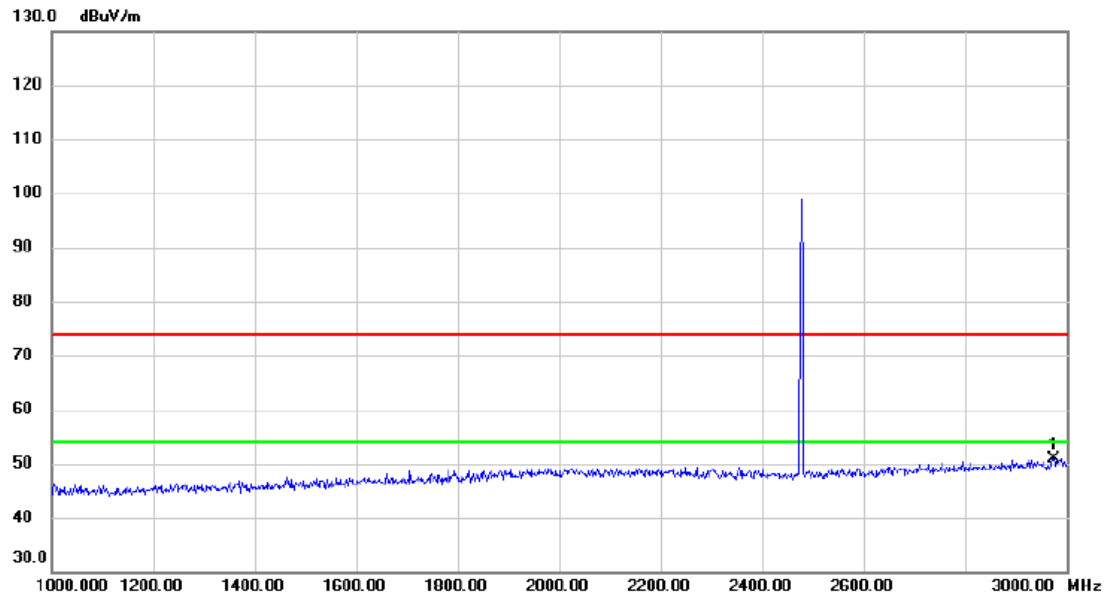


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1 *     | 2974.000     | 41.65                    | 9.26                    | 50.91                      | 74.00           | -23.09       | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (1Mbps)

## Horizontal

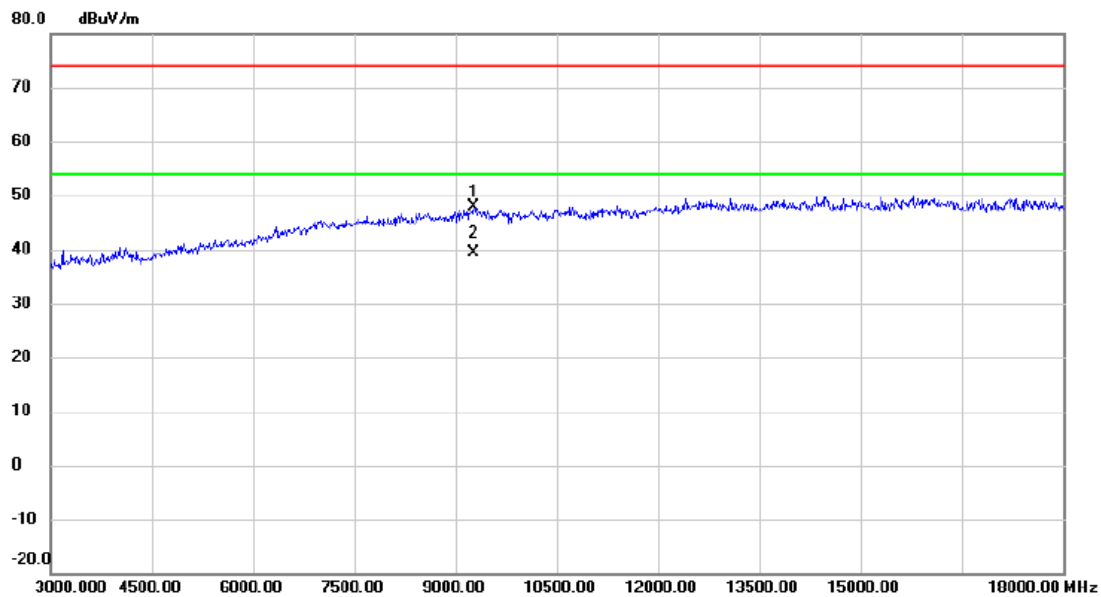

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 9270.000     | 37.00                    | 10.83                   | 47.83                      | 74.00           | -26.17       | peak     |         |
| 2   | *   | 9270.000     | 28.45                    | 10.83                   | 39.28                      | 54.00           | -14.72       | AVG      |         |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (1Mbps)

## Horizontal

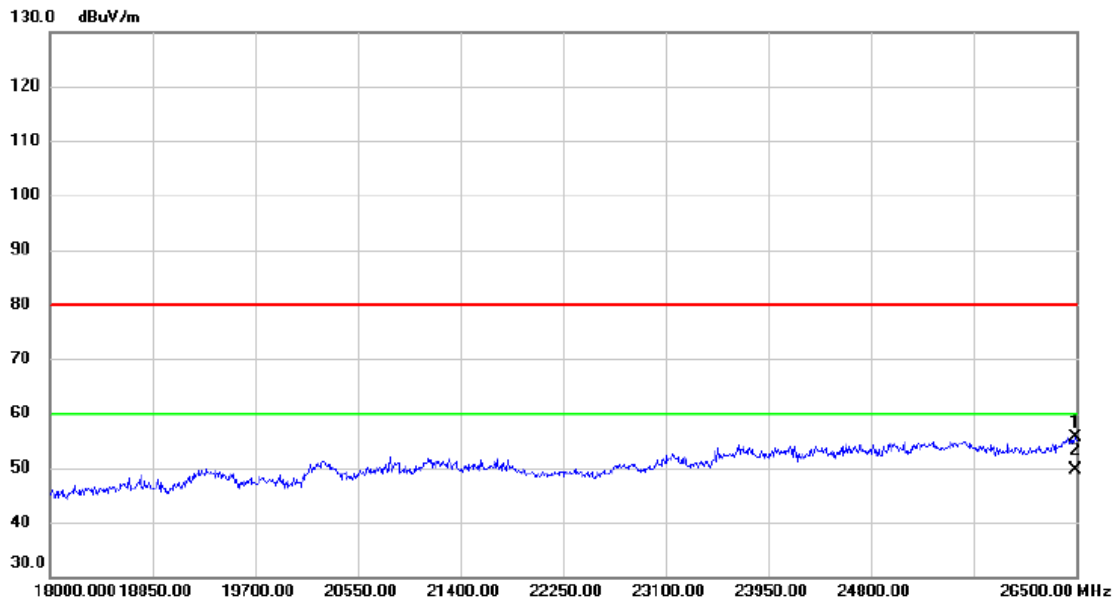


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 26491.50     | 23.37                    | 32.17                   | 55.54                      | 80.00           | -24.46       | peak     |         |
| 2   | *   | 26491.50     | 17.43                    | 32.17                   | 49.60                      | 60.00           | -10.40       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M GFSK (2Mbps)

## Vertical

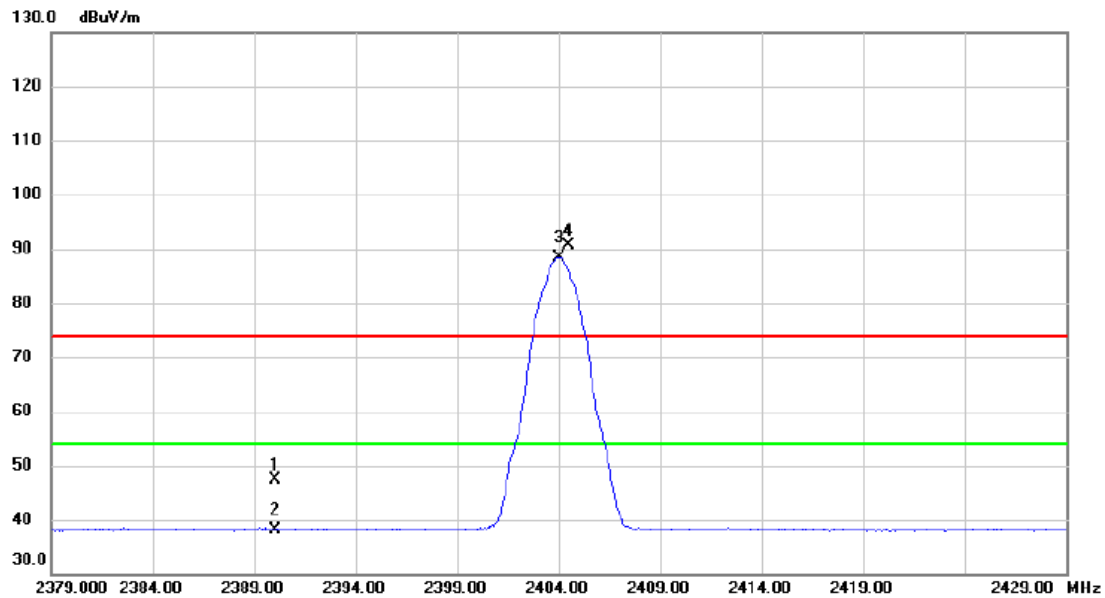


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 2390.000     | 40.46                    | 6.89                    | 47.35                      | 74.00           | -26.65       | peak     |          |
| 2   |     | 2390.000     | 31.35                    | 6.89                    | 38.24                      | 54.00           | -15.76       | AVG      |          |
| 3   | *   | 2404.000     | 81.52                    | 6.88                    | 88.40                      | 54.00           | 34.40        | AVG      | No Limit |
| 4   | X   | 2404.500     | 83.83                    | 6.88                    | 90.71                      | 74.00           | 16.71        | peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|            |                                       |
|------------|---------------------------------------|
| Test Mode: | TX 2404 MHz _CH00_UHD 2M GFSK (2Mbps) |
|------------|---------------------------------------|

### Vertical

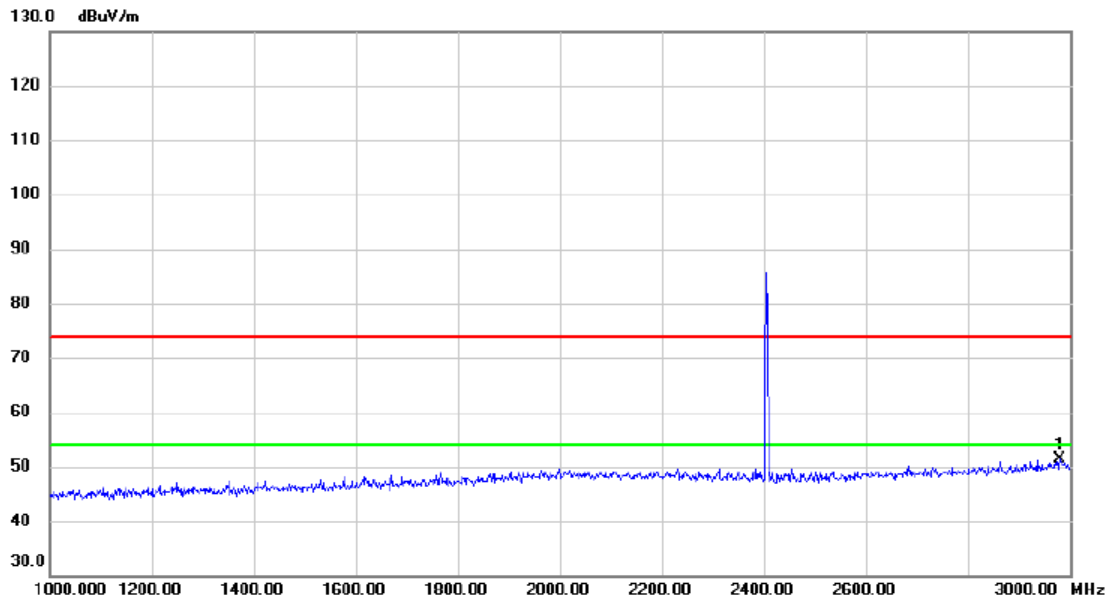


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2980.000 | 42.18         | 9.30           | 51.48       | 74.00  | -22.52 | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M GFSK (2Mbps)

## Vertical

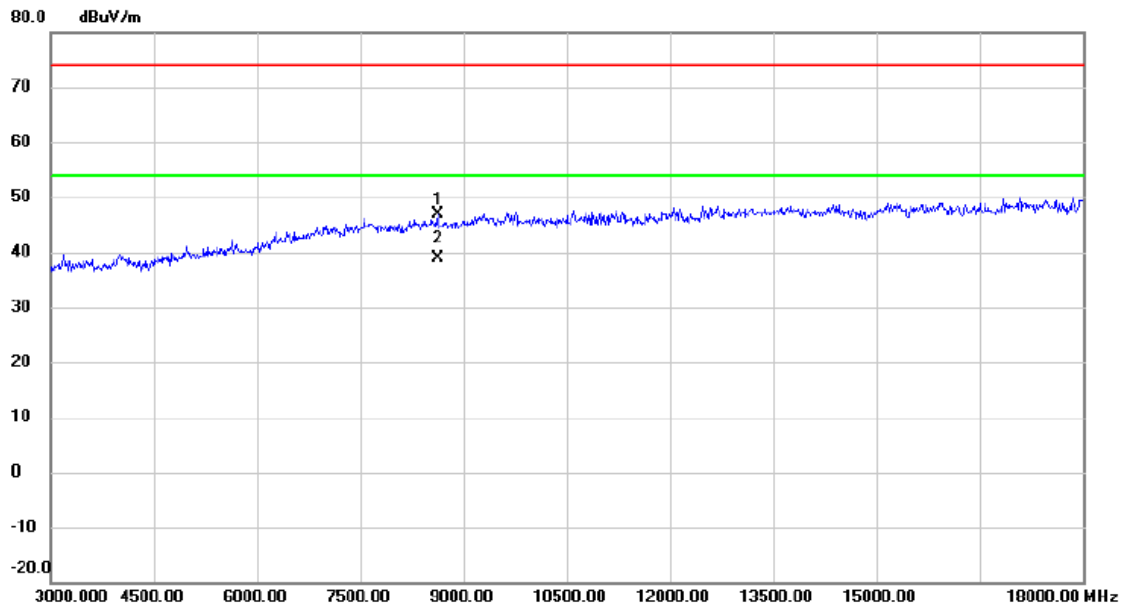

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8625.000     | 36.53                    | 10.24                   | 46.77                      | 74.00           | -27.23       | peak     |         |
| 2   | *   | 8625.000     | 28.56                    | 10.24                   | 38.80                      | 54.00           | -15.20       | AVG      |         |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|            |                                       |
|------------|---------------------------------------|
| Test Mode: | TX 2404 MHz _CH00_UHD 2M GFSK (2Mbps) |
|------------|---------------------------------------|

## Vertical

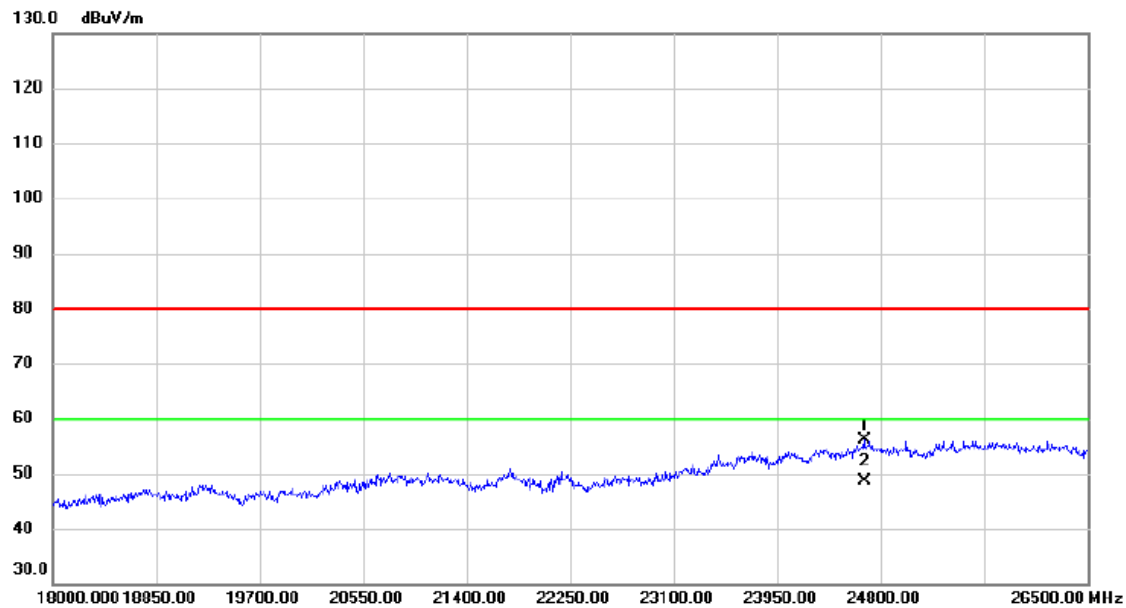


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 24664.00     | 25.94                    | 30.07                   | 56.01                      | 80.00           | -23.99       | peak     |         |
| 2   | *   | 24664.00     | 18.45                    | 30.07                   | 48.52                      | 60.00           | -11.48       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M GFSK (2Mbps)

## Horizontal

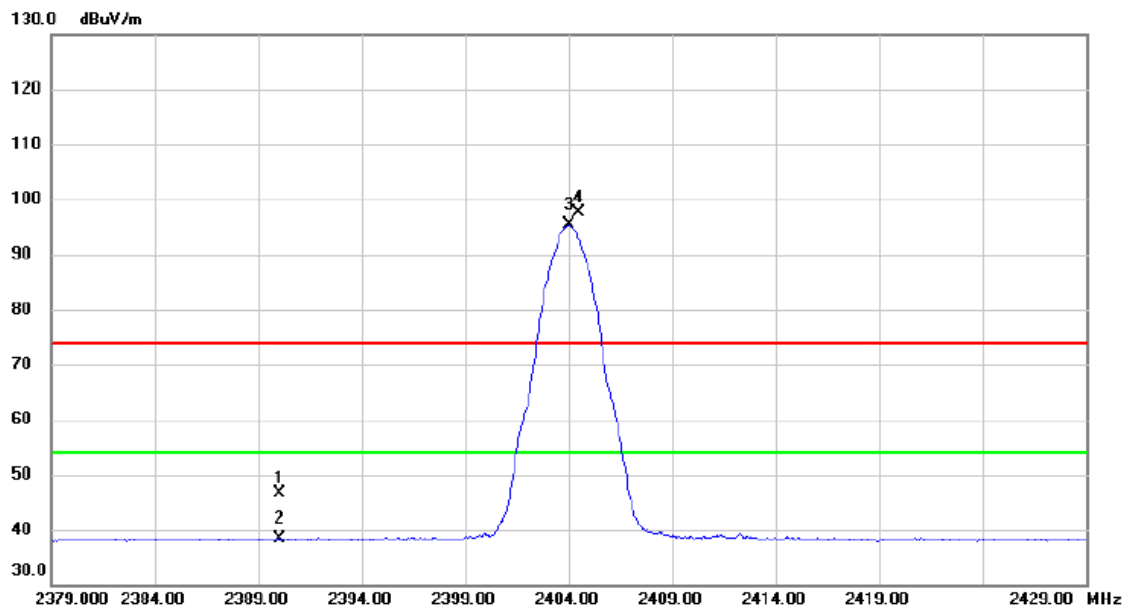


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 2390.000     | 39.79                    | 6.89                    | 46.68                      | 74.00           | -27.32       | peak     |          |
| 2   |     | 2390.000     | 31.61                    | 6.89                    | 38.50                      | 54.00           | -15.50       | AVG      |          |
| 3   | *   | 2404.000     | 88.45                    | 6.88                    | 95.33                      | 54.00           | 41.33        | AVG      | No Limit |
| 4   | X   | 2404.500     | 90.77                    | 6.88                    | 97.65                      | 74.00           | 23.65        | peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M GFSK (2Mbps)

## Horizontal

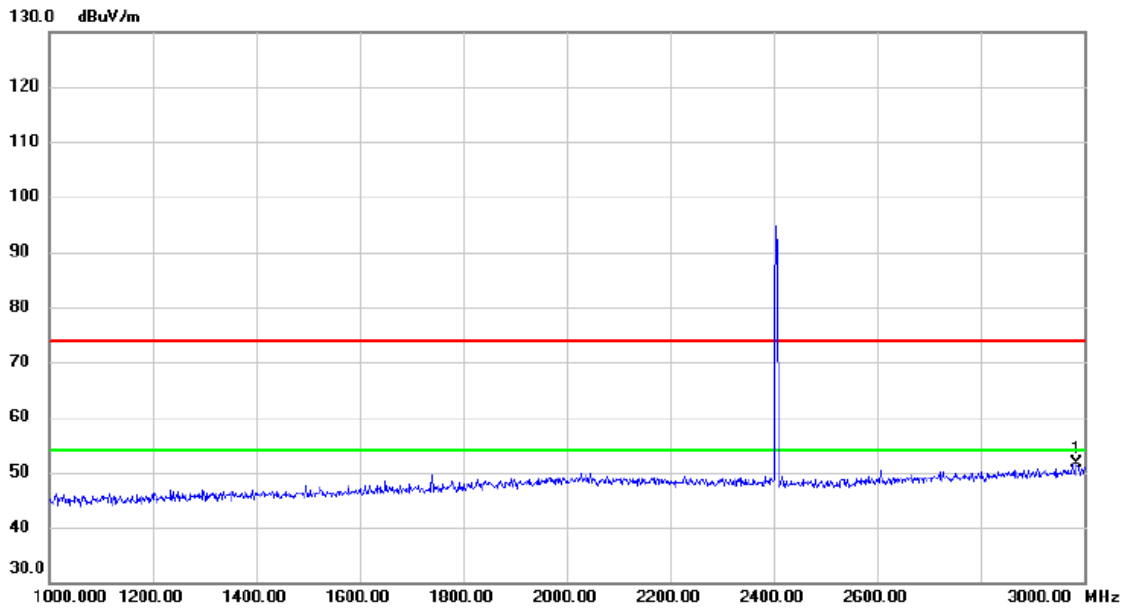

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2986.000 | 42.40         | 9.32           | 51.72       | 74.00  | -22.28 | peak     |         |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|            |                                       |
|------------|---------------------------------------|
| Test Mode: | TX 2404 MHz _CH00_UHD 2M GFSK (2Mbps) |
|------------|---------------------------------------|

## Horizontal

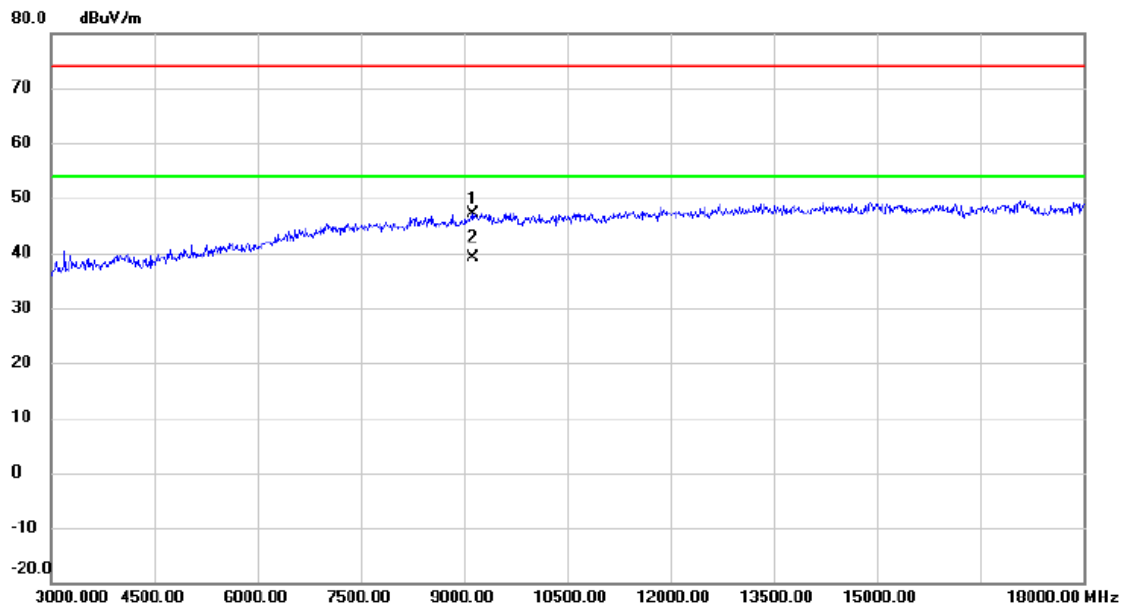


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 9120.000     | 36.47                    | 10.67                   | 47.14                      | 74.00           | -26.86       | peak     |         |
| 2   | *   | 9120.000     | 28.46                    | 10.67                   | 39.13                      | 54.00           | -14.87       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M GFSK (2Mbps)

## Horizontal

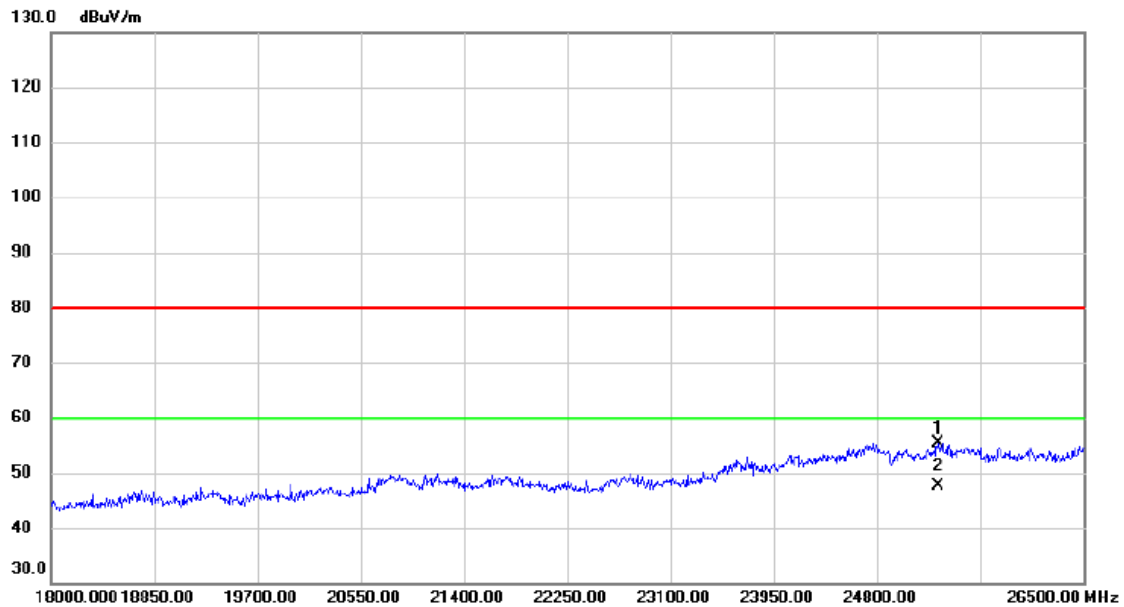

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 25301.50     | 25.15                    | 30.26                   | 55.41                      | 80.00           | -24.59       | peak     |         |
| 2   | *   | 25301.50     | 17.31                    | 30.26                   | 47.57                      | 60.00           | -12.43       | AVG      |         |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M GFSK (2Mbps)

## Vertical

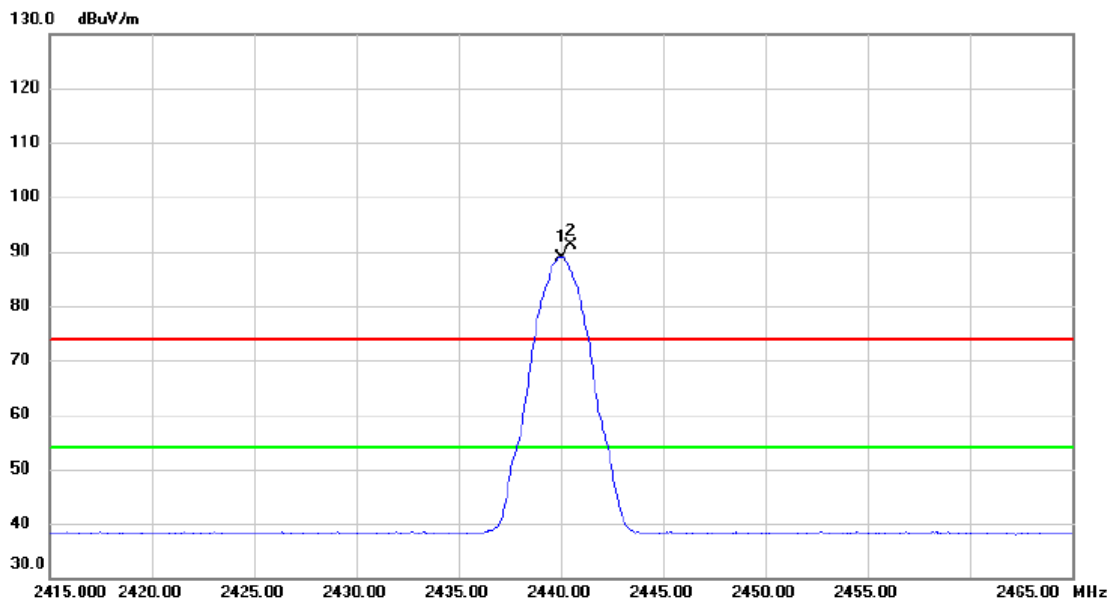


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment  |
| 1   | *   | 2440.050 | 82.08         | 6.84           | 88.92       | 54.00  | 34.92  | AVG      | No Limit |
| 2   | X   | 2440.500 | 84.37         | 6.84           | 91.21       | 74.00  | 17.21  | peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|            |                                       |
|------------|---------------------------------------|
| Test Mode: | TX 2440 MHz _CH18_UHD 2M GFSK (2Mbps) |
|------------|---------------------------------------|

## Vertical

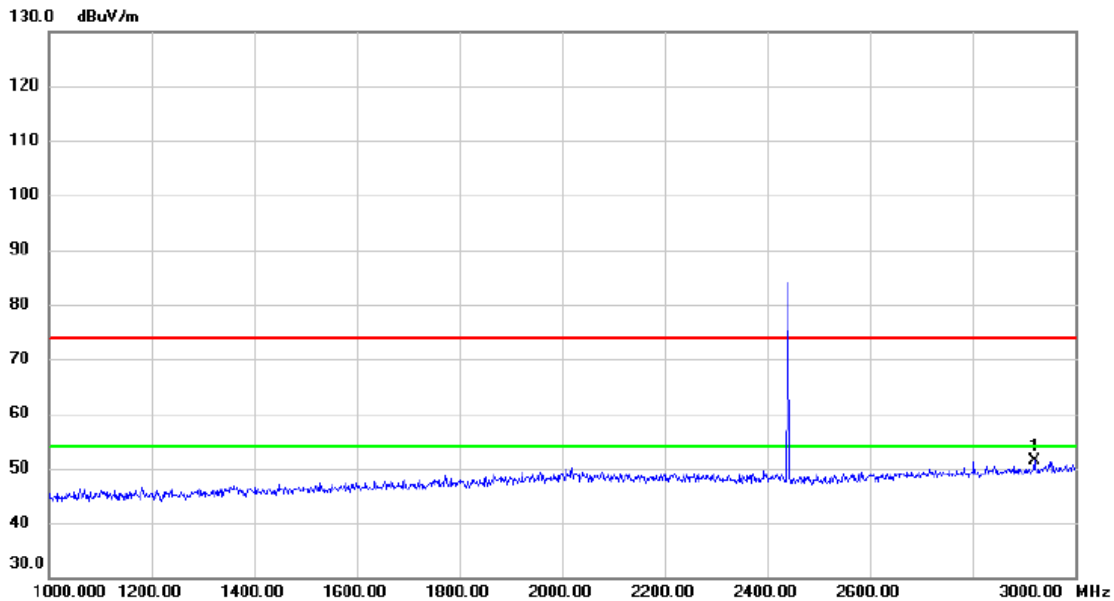


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2920.000 | 42.36         | 8.97           | 51.33       | 74.00  | -22.67 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M GFSK (2Mbps)

## Vertical

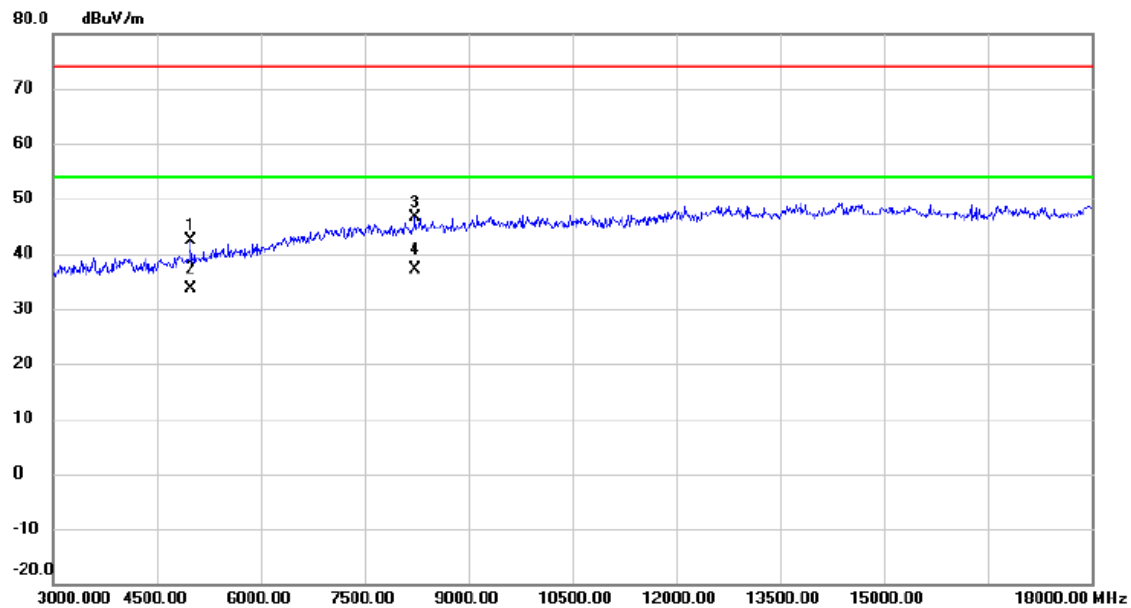

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 4995.000     | 38.31                    | 4.12                    | 42.43                      | 74.00           | -31.57       | peak     |         |
| 2   |     | 4995.000     | 29.56                    | 4.12                    | 33.68                      | 54.00           | -20.32       | AVG      |         |
| 3   |     | 8235.000     | 36.84                    | 9.76                    | 46.60                      | 74.00           | -27.40       | peak     |         |
| 4   | *   | 8235.000     | 27.48                    | 9.76                    | 37.24                      | 54.00           | -16.76       | AVG      |         |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|            |                                       |
|------------|---------------------------------------|
| Test Mode: | TX 2440 MHz _CH18_UHD 2M GFSK (2Mbps) |
|------------|---------------------------------------|

### Vertical

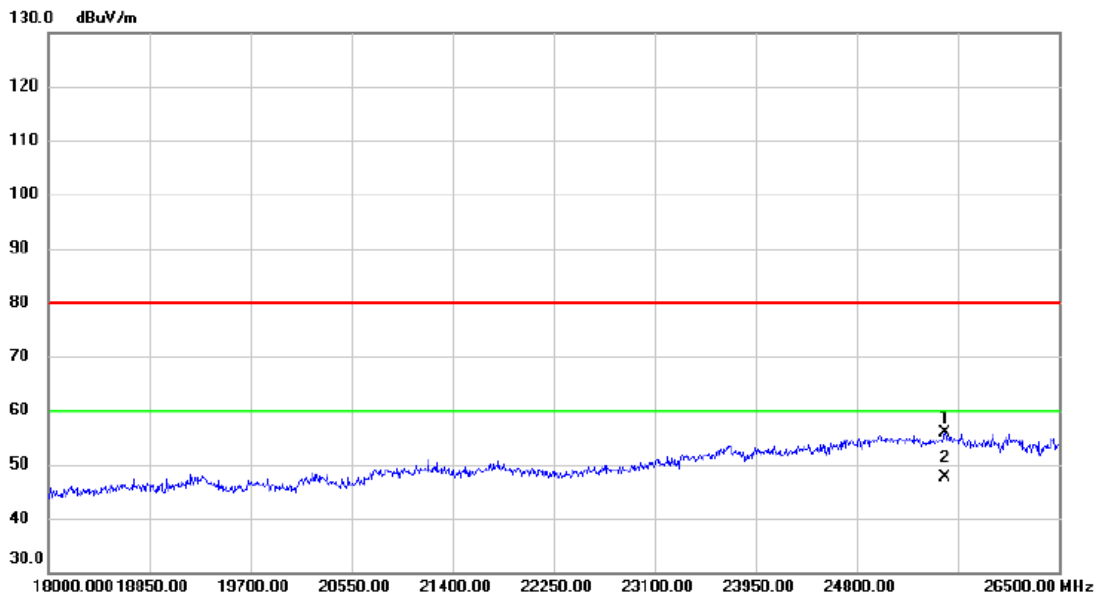


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 25539.50     | 25.84                    | 30.11                   | 55.95                      | 80.00           | -24.05       | peak     |         |
| 2   | *   | 25539.50     | 17.49                    | 30.11                   | 47.60                      | 60.00           | -12.40       | AVG      |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M GFSK (2Mbps)

## Horizontal

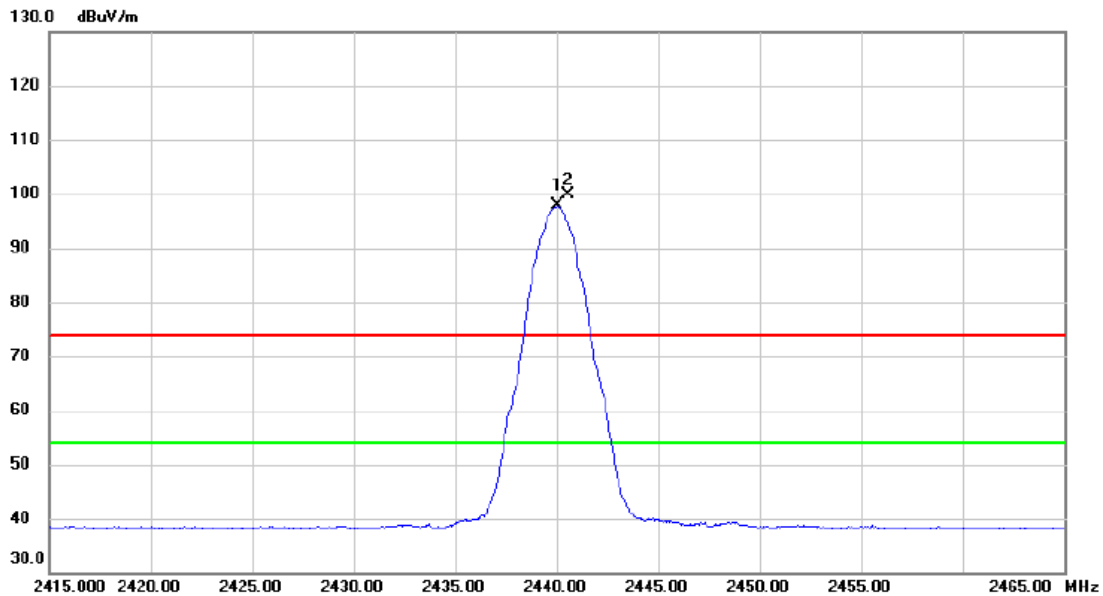


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment  |
| 1   | *   | 2440.050 | 90.92         | 6.84           | 97.76       | 54.00  | 43.76  | AVG      | No Limit |
| 2   | X   | 2440.550 | 93.14         | 6.84           | 99.98       | 74.00  | 25.98  | peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M GFSK (2Mbps)

## Horizontal

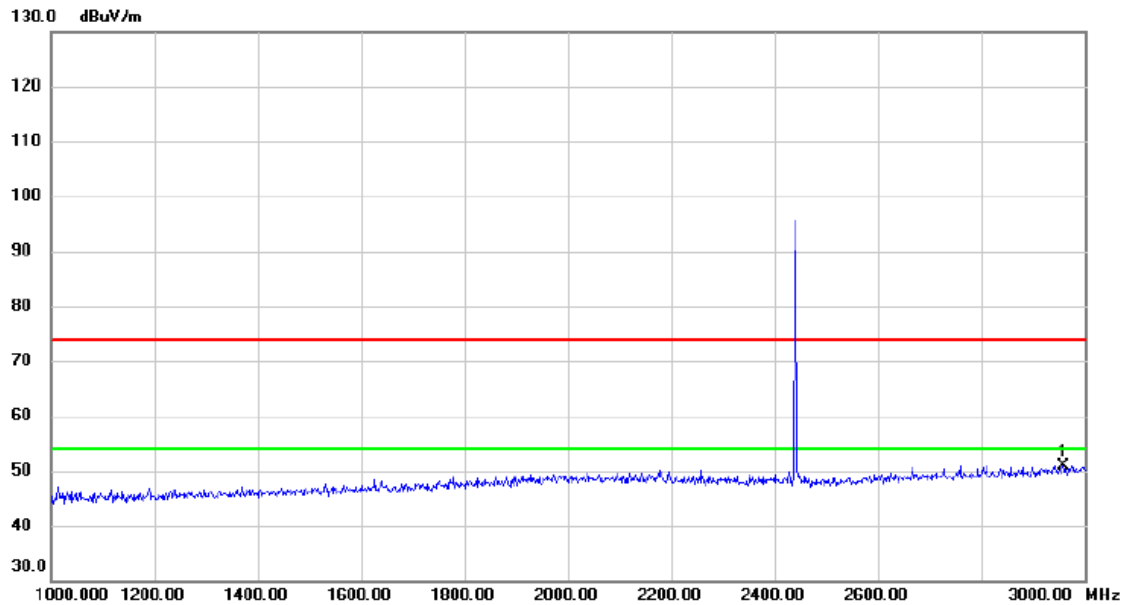

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2958.000 | 41.72         | 9.17           | 50.89       | 74.00  | -23.11 | peak     |         |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|            |                                       |
|------------|---------------------------------------|
| Test Mode: | TX 2440 MHz _CH18_UHD 2M GFSK (2Mbps) |
|------------|---------------------------------------|

### Horizontal

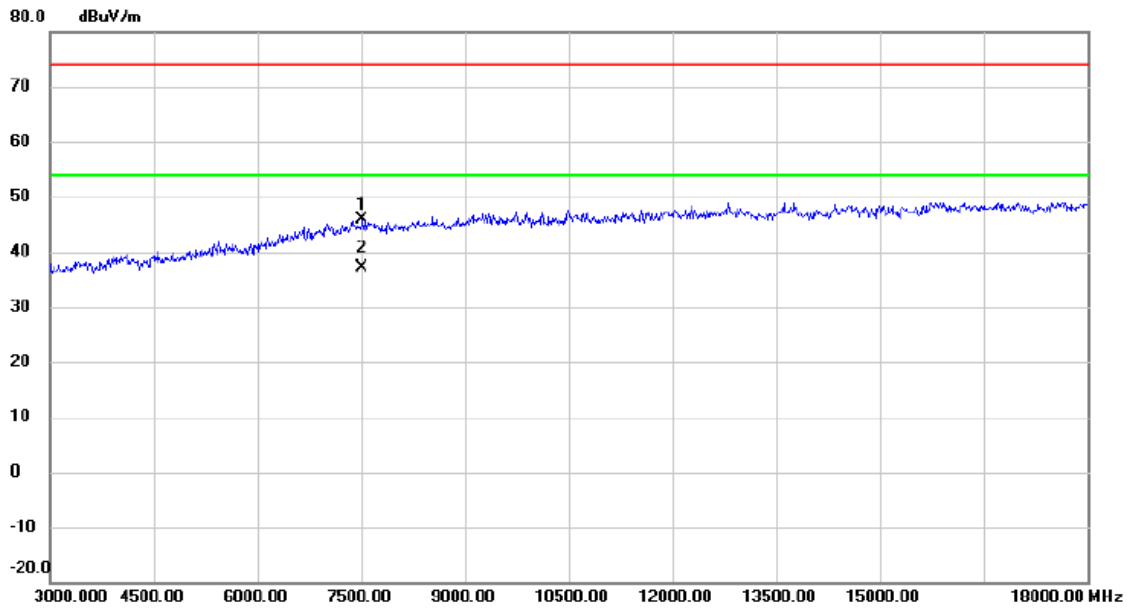


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7515.000     | 36.39                    | 9.58                    | 45.97                      | 74.00           | -28.03       | peak     |         |
| 2   | *   | 7515.000     | 27.58                    | 9.58                    | 37.16                      | 54.00           | -16.84       | AVG      |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|            |                                       |
|------------|---------------------------------------|
| Test Mode: | TX 2440 MHz _CH18_UHD 2M GFSK (2Mbps) |
|------------|---------------------------------------|

## Horizontal

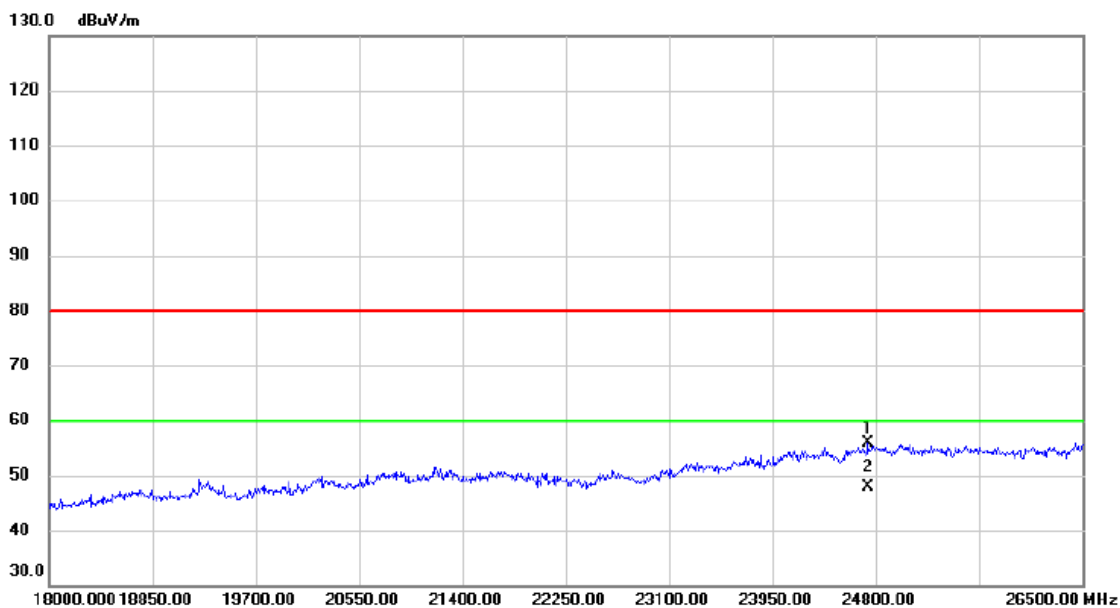


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 24740.50     | 25.77                    | 30.17                   | 55.94                      | 80.00           | -24.06       | peak     |         |
| 2   | *   | 24740.50     | 17.63                    | 30.17                   | 47.80                      | 60.00           | -12.20       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (2Mbps)

## Vertical

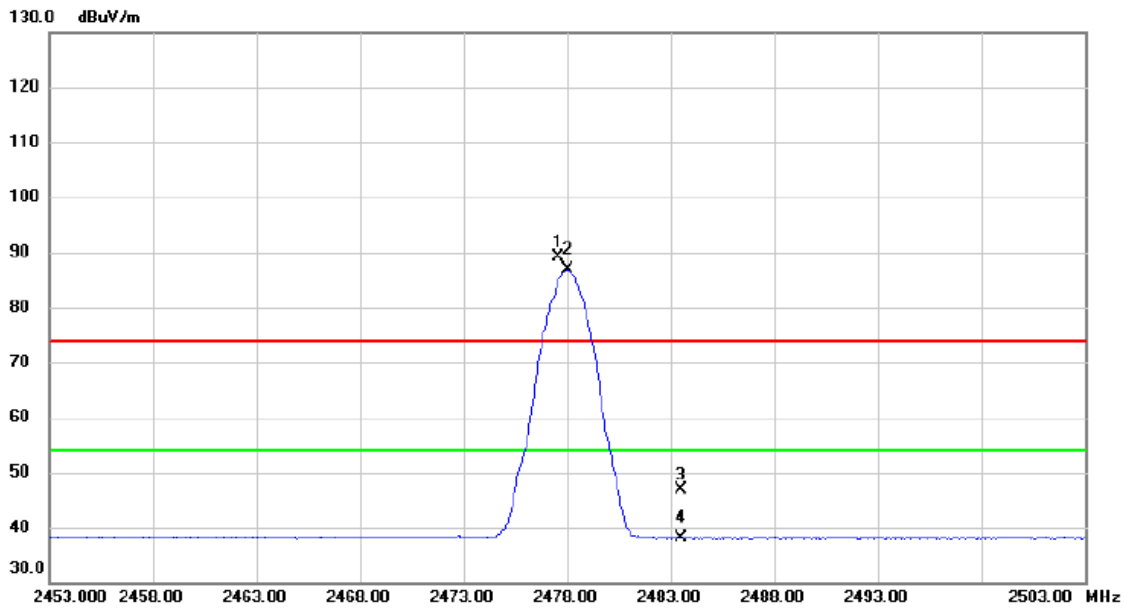


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 2477.550     | 82.35                    | 6.79                    | 89.14                      | 74.00           | 15.14        | peak     | No Limit |
| 2   | *   | 2478.050     | 79.97                    | 6.80                    | 86.77                      | 54.00           | 32.77        | AVG      | No Limit |
| 3   |     | 2483.500     | 40.08                    | 6.80                    | 46.88                      | 74.00           | -27.12       | peak     |          |
| 4   |     | 2483.500     | 31.28                    | 6.80                    | 38.08                      | 54.00           | -15.92       | AVG      |          |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (2Mbps)

## Vertical

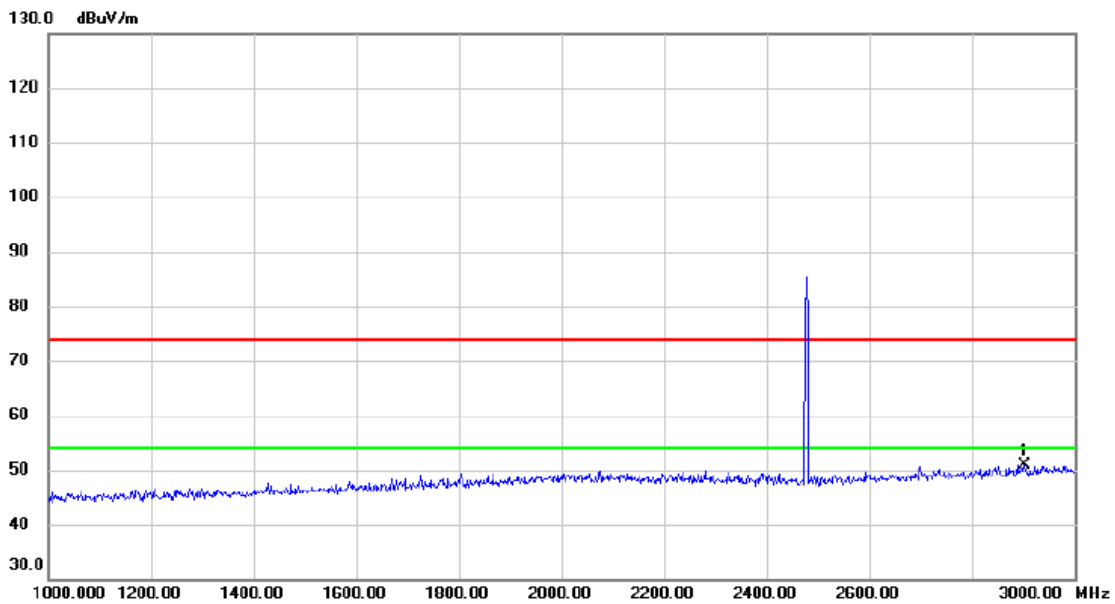


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2902.000 | 42.09         | 8.89           | 50.98       | 74.00  | -23.02 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (2Mbps)

## Vertical

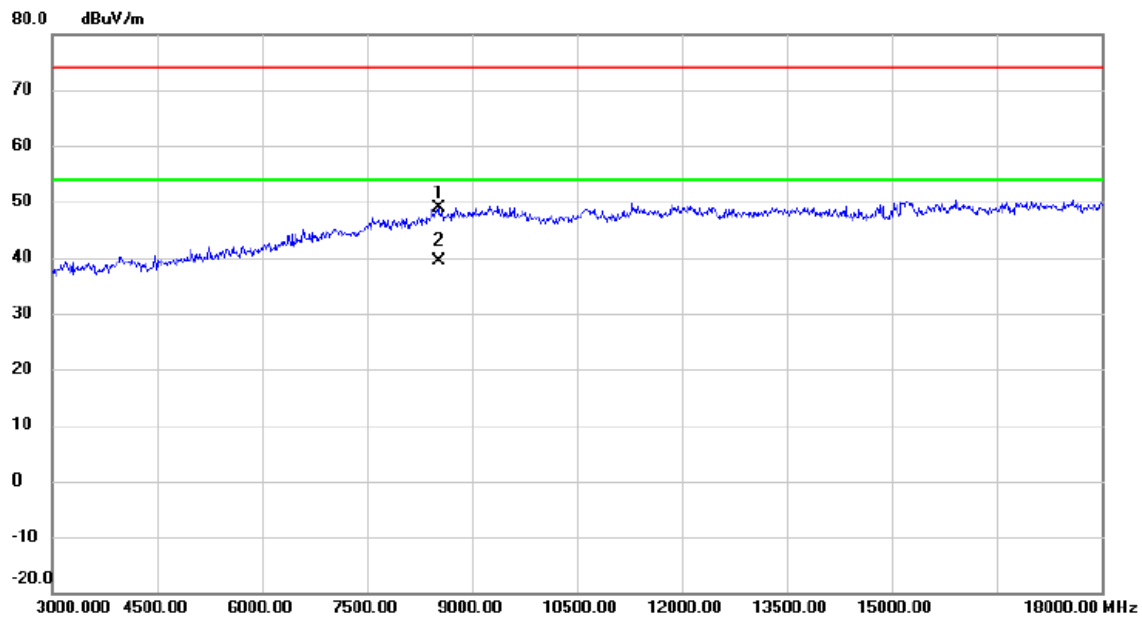


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8520.000     | 38.73                    | 10.17                   | 48.90                      | 74.00           | -25.10       | peak     |         |
| 2   | *   | 8520.000     | 29.15                    | 10.17                   | 39.32                      | 54.00           | -14.68       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (2Mbps)

## Vertical

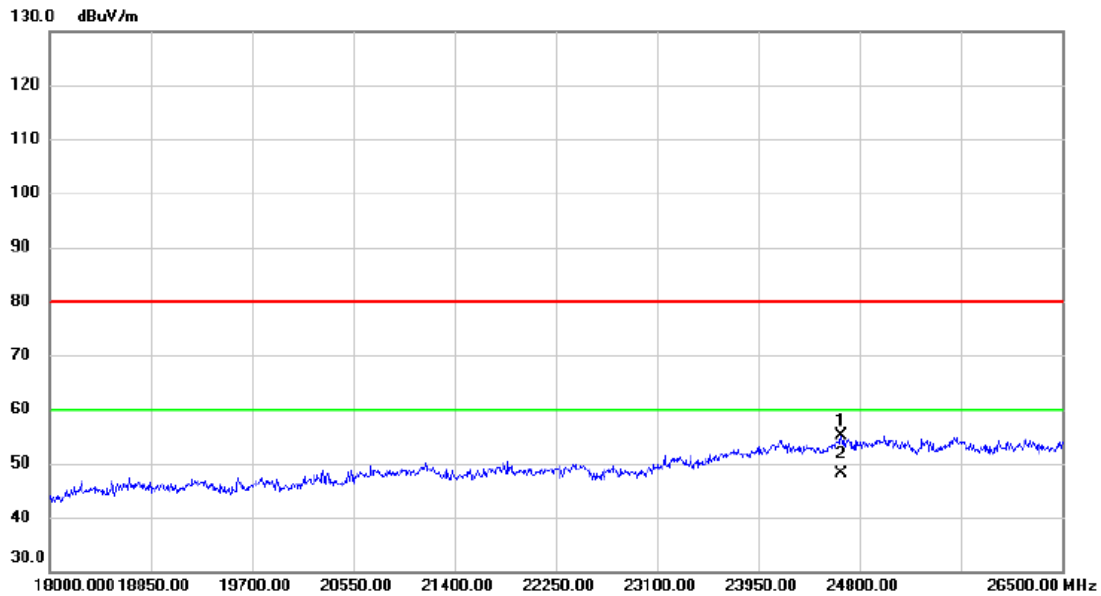

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 24647.00     | 25.14                    | 30.05                   | 55.19                      | 80.00           | -24.81       | peak     |         |
| 2   | *   | 24647.00     | 18.02                    | 30.05                   | 48.07                      | 60.00           | -11.93       | AVG      |         |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (2Mbps)

## Horizontal

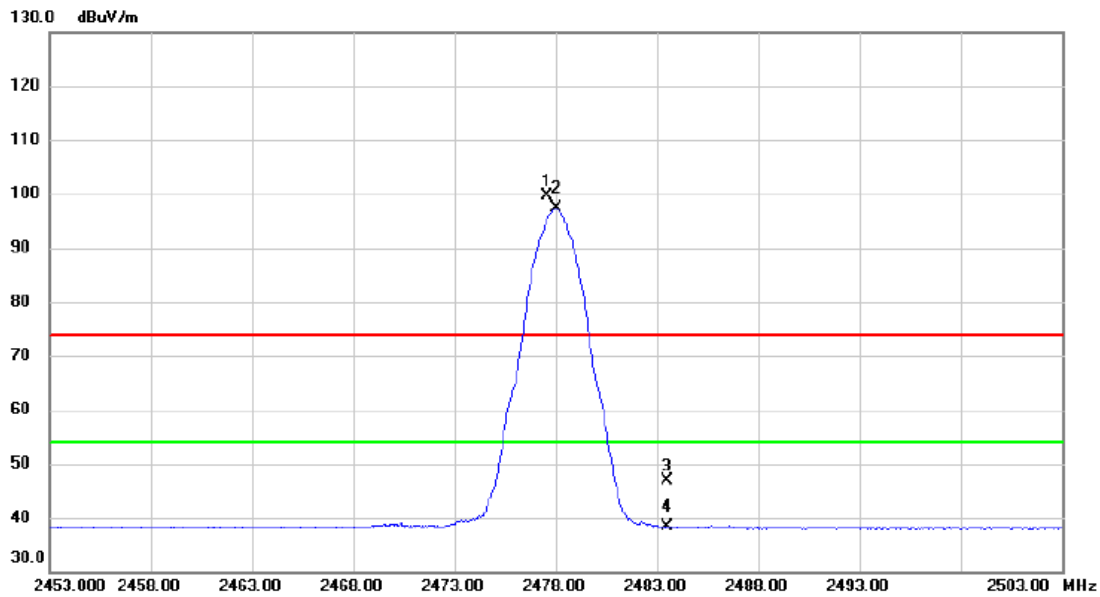

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 2477.550     | 92.81                    | 6.79                    | 99.60                      | 74.00           | 25.60        | peak     | No Limit |
| 2   | *   | 2478.000     | 90.49                    | 6.80                    | 97.29                      | 54.00           | 43.29        | AVG      | No Limit |
| 3   |     | 2483.500     | 40.06                    | 6.80                    | 46.86                      | 74.00           | -27.14       | peak     |          |
| 4   |     | 2483.500     | 31.54                    | 6.80                    | 38.34                      | 54.00           | -15.66       | AVG      |          |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (2Mbps)

## Horizontal

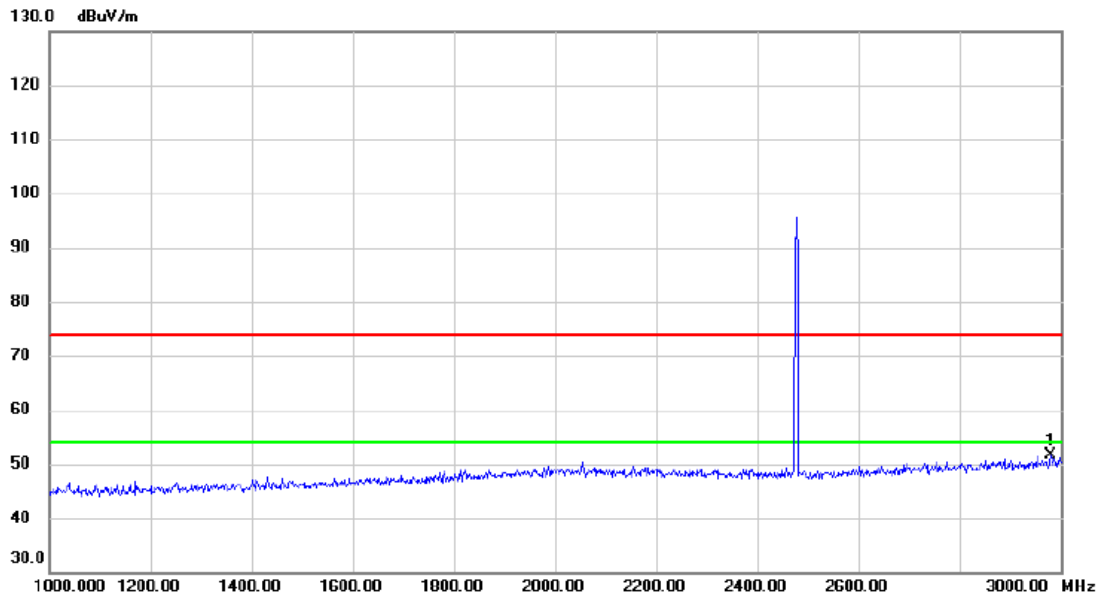


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 2980.000     | 42.25                    | 9.30                    | 51.55                      | 74.00           | -22.45       | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (2Mbps)

## Horizontal

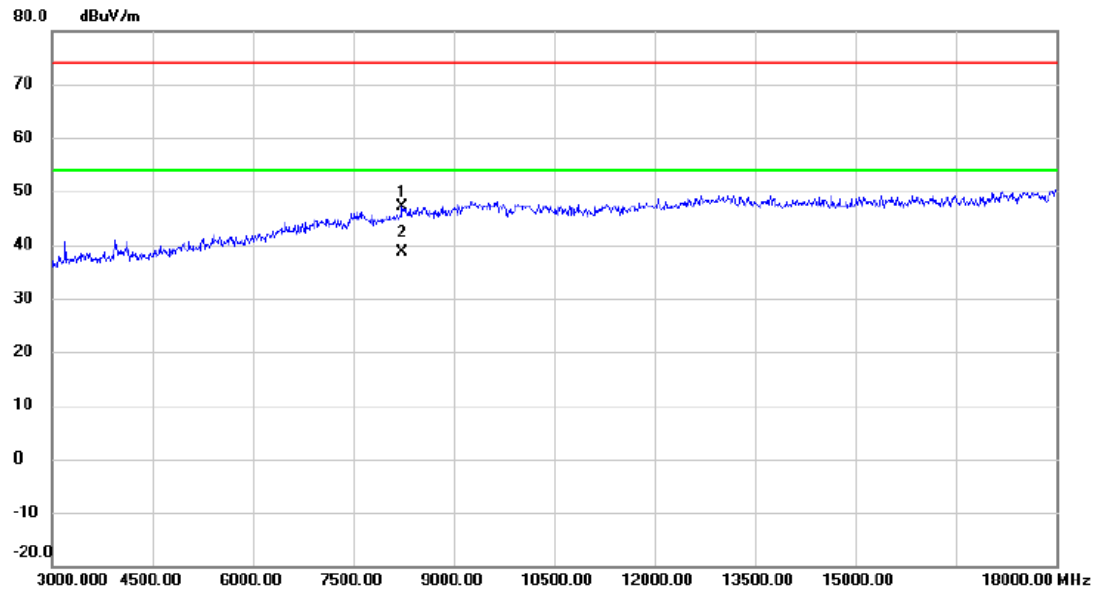


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 8235.000 | 37.28         | 9.76           | 47.04       | 74.00  | -26.96 | peak     |         |
| 2   | *   | 8235.000 | 28.76         | 9.76           | 38.52       | 54.00  | -15.48 | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M GFSK (2Mbps)

## Horizontal

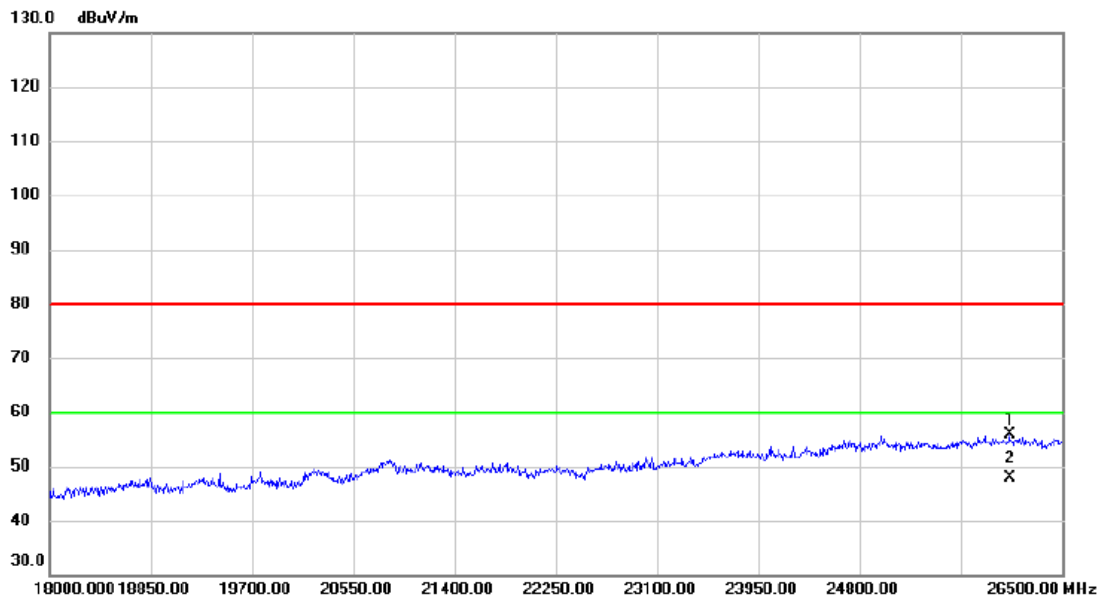


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 26058.00     | 25.22                    | 30.61                   | 55.83                      | 80.00           | -24.17       | peak     |         |
| 2   | *   | 26058.00     | 17.23                    | 30.61                   | 47.84                      | 60.00           | -12.16       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M  $\pi/4$ -DQPSK

## Vertical

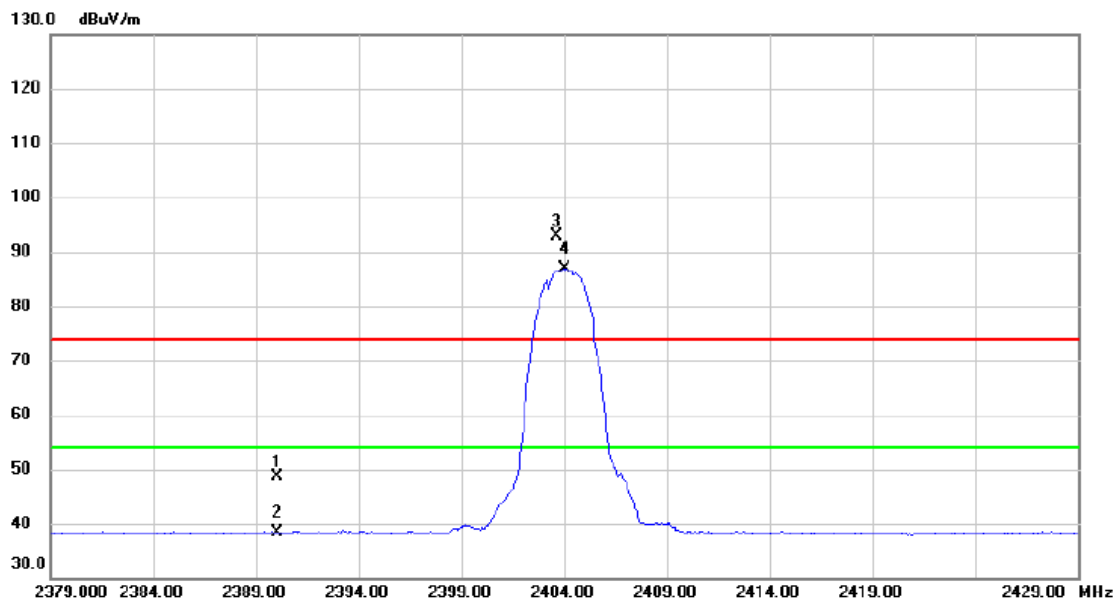

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 2390.000     | 41.75                    | 6.89                    | 48.64                      | 74.00           | -25.36       | peak     |          |
| 2   |     | 2390.000     | 31.51                    | 6.89                    | 38.40                      | 54.00           | -15.60       | AVG      |          |
| 3   | X   | 2403.650     | 86.10                    | 6.88                    | 92.98                      | 74.00           | 18.98        | peak     | No Limit |
| 4   | *   | 2404.050     | 79.94                    | 6.88                    | 86.82                      | 54.00           | 32.82        | AVG      | No Limit |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|            |                                         |
|------------|-----------------------------------------|
| Test Mode: | TX 2404 MHz _CH00_UHD 2M $\pi/4$ -DQPSK |
|------------|-----------------------------------------|

## Vertical

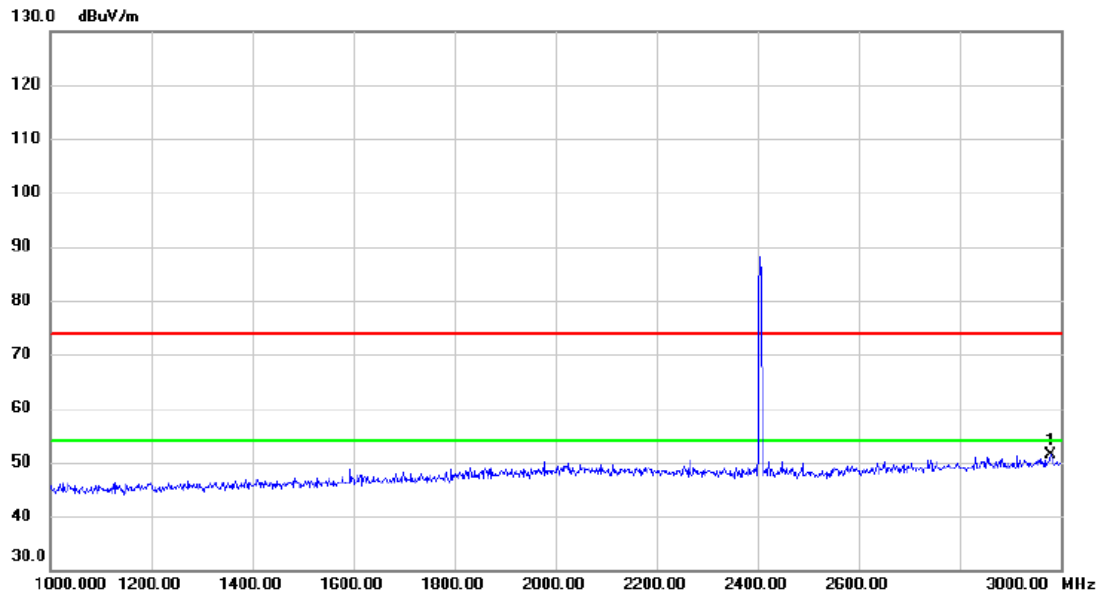


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 2980.000     | 42.13                    | 9.30                    | 51.43                      | 74.00           | -22.57       | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|            |                                         |
|------------|-----------------------------------------|
| Test Mode: | TX 2404 MHz _CH00_UHD 2M $\pi/4$ -DQPSK |
|------------|-----------------------------------------|

## Vertical

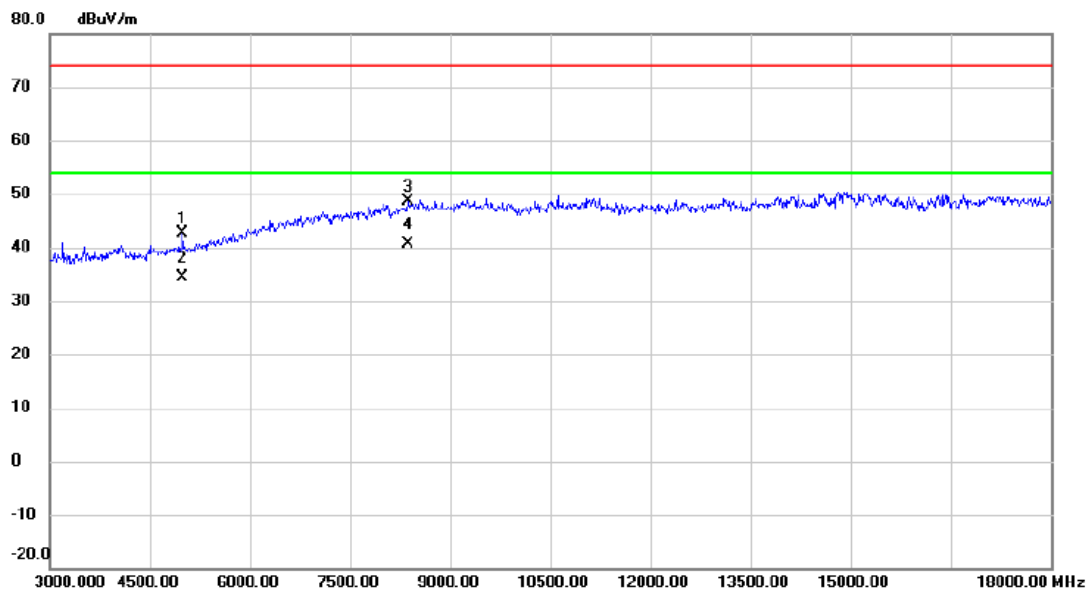


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 4995.000     | 38.46                    | 4.12                    | 42.58                      | 74.00           | -31.42       | peak     |         |
| 2   |     | 4995.000     | 30.25                    | 4.12                    | 34.37                      | 54.00           | -19.63       | AVG      |         |
| 3   |     | 8370.000     | 38.70                    | 9.96                    | 48.66                      | 74.00           | -25.34       | peak     |         |
| 4 * |     | 8370.000     | 30.58                    | 9.96                    | 40.54                      | 54.00           | -13.46       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M  $\pi/4$ -DQPSK

## Vertical

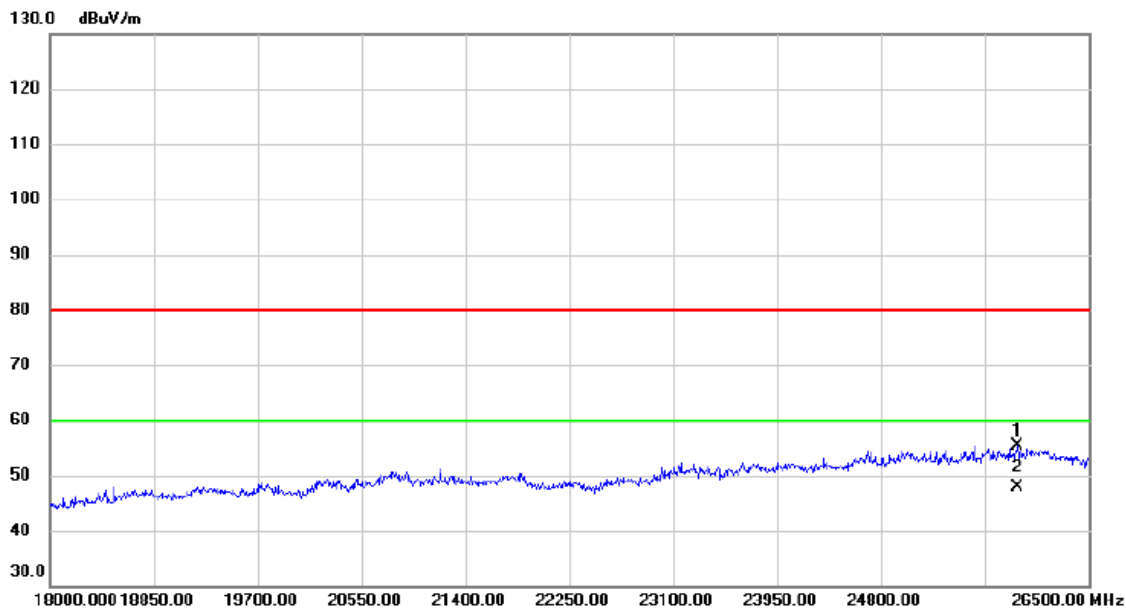


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 25913.50     | 25.10                    | 30.36                   | 55.46                      | 80.00           | -24.54       | peak     |         |
| 2   | *   | 25913.50     | 17.42                    | 30.36                   | 47.78                      | 60.00           | -12.22       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|            |                                         |
|------------|-----------------------------------------|
| Test Mode: | TX 2404 MHz _CH00_UHD 2M $\pi/4$ -DQPSK |
|------------|-----------------------------------------|

## Horizontal

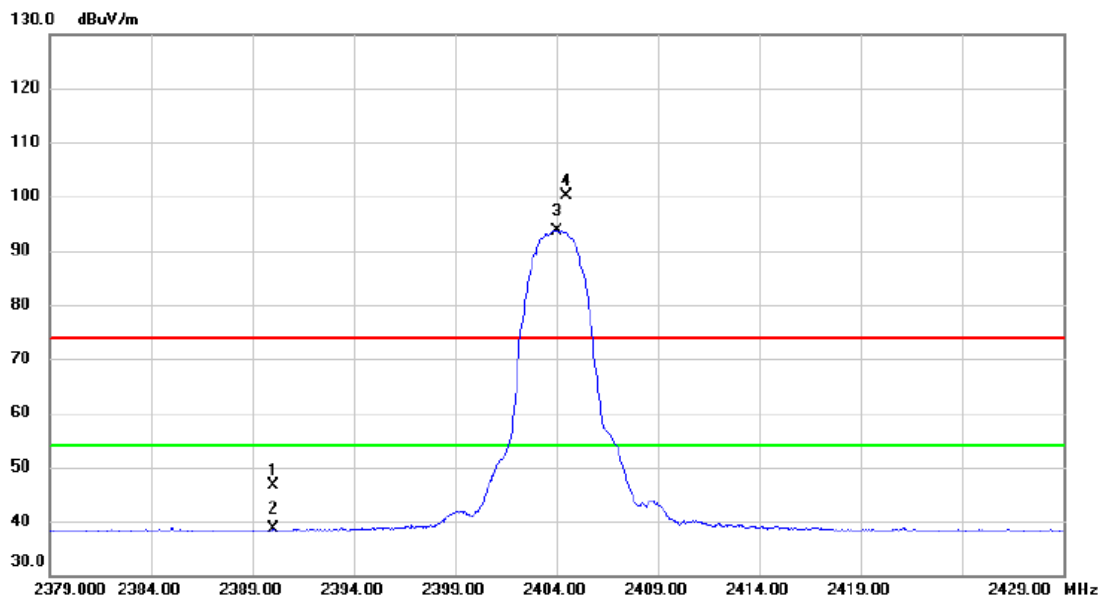


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 2390.000     | 39.68                    | 6.89                    | 46.57                      | 74.00           | -27.43       | peak     |          |
| 2   |     | 2390.000     | 31.63                    | 6.89                    | 38.52                      | 54.00           | -15.48       | AVG      |          |
| 3   | *   | 2404.000     | 86.82                    | 6.88                    | 93.70                      | 54.00           | 39.70        | AVG      | No Limit |
| 4   | X   | 2404.500     | 93.24                    | 6.88                    | 100.12                     | 74.00           | 26.12        | peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M  $\pi/4$ -DQPSK

## Horizontal

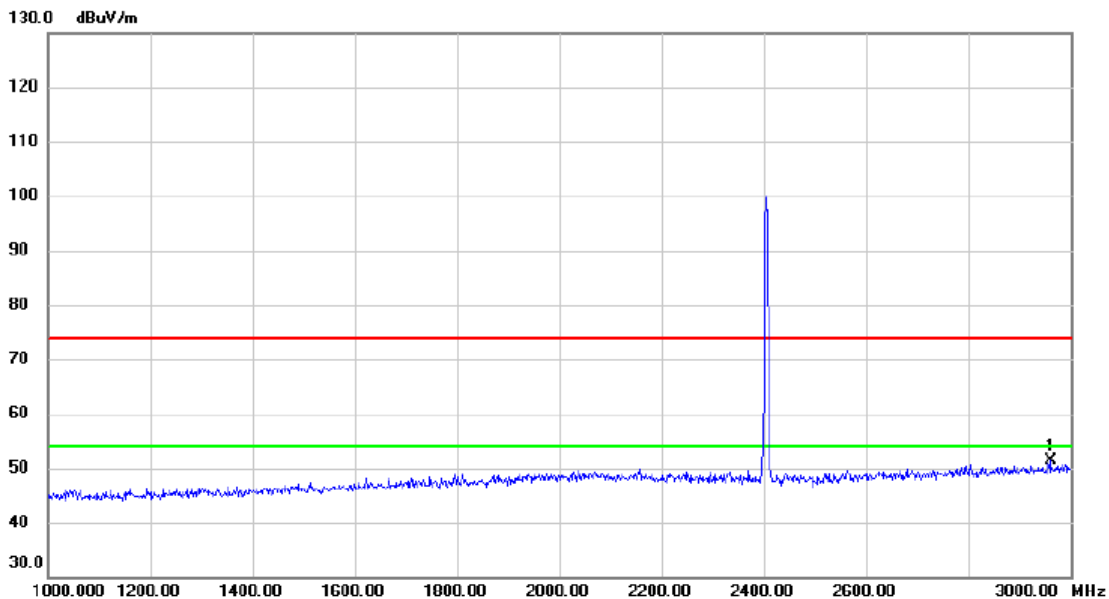


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2960.000 | 42.11         | 9.19           | 51.30       | 74.00  | -22.70 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M  $\pi/4$ -DQPSK

## Horizontal

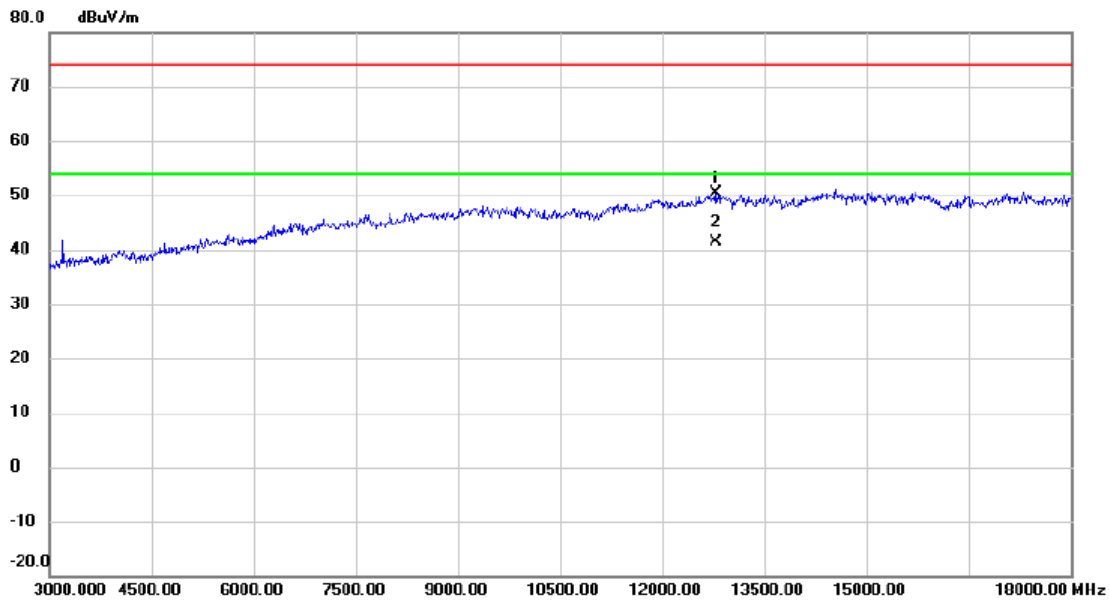

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 12780.000    | 35.92                    | 14.51                   | 50.43                      | 74.00           | -23.57       | peak     |         |
| 2   | *   | 12780.000    | 26.87                    | 14.51                   | 41.38                      | 54.00           | -12.62       | AVG      |         |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M  $\pi/4$ -DQPSK

## Horizontal

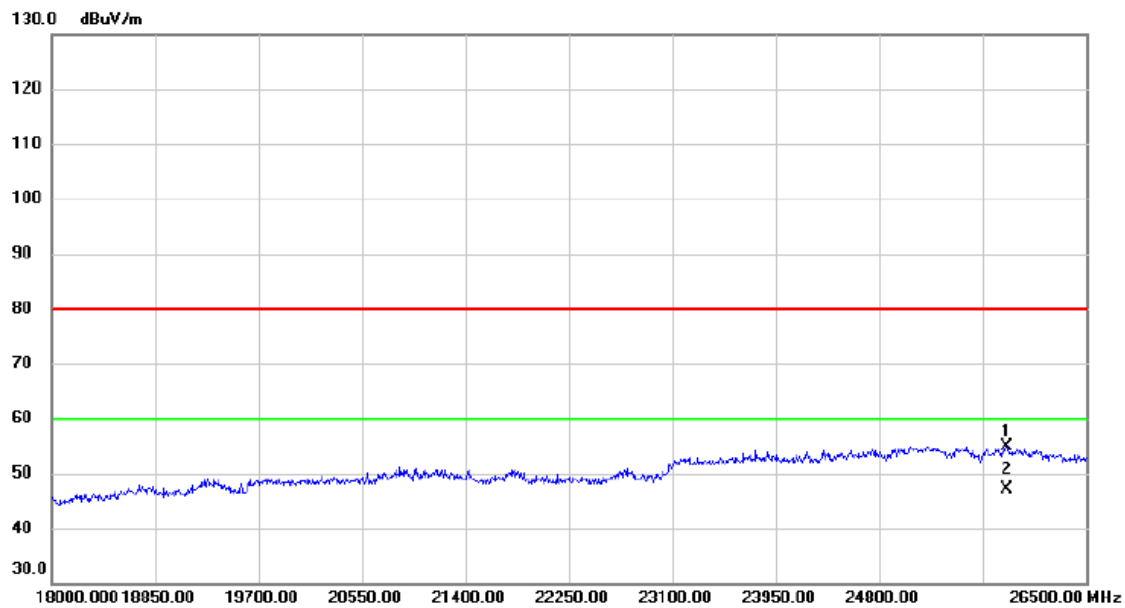

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 25845.50     | 24.58                    | 30.31                   | 54.89                      | 80.00           | -25.11       | peak     |         |
| 2   | *   | 25845.50     | 16.87                    | 30.31                   | 47.18                      | 60.00           | -12.82       | AVG      |         |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M  $\pi/4$ -DQPSK

## Vertical

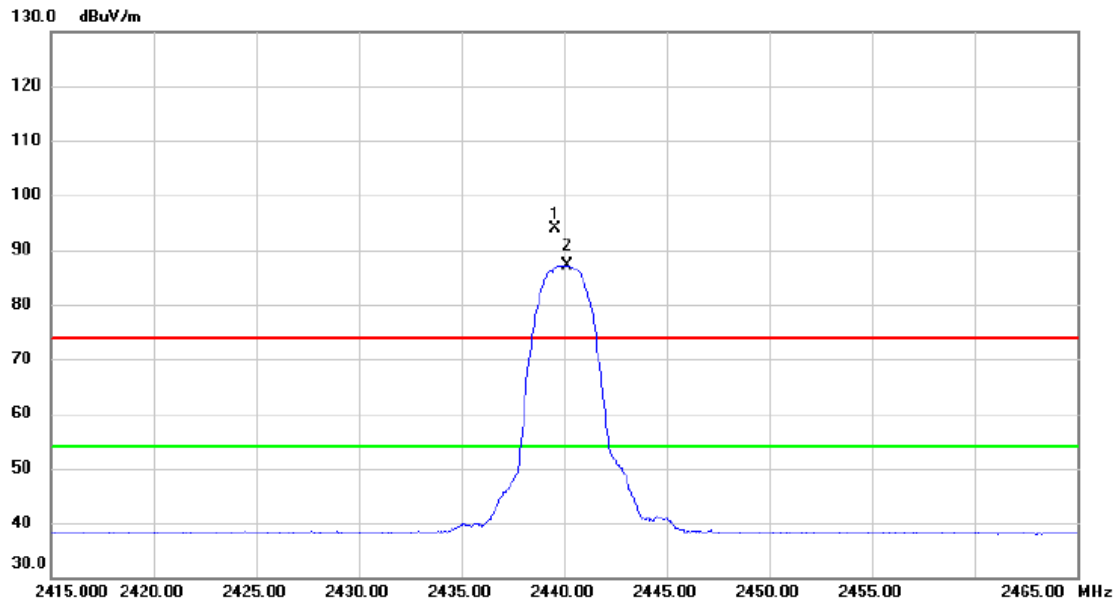


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 2439.550     | 86.96                    | 6.85                    | 93.81                      | 74.00           | 19.81        | peak     | No Limit |
| 2   | *   | 2440.150     | 80.36                    | 6.84                    | 87.20                      | 54.00           | 33.20        | AVG      | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M  $\pi/4$ -DQPSK

## Vertical

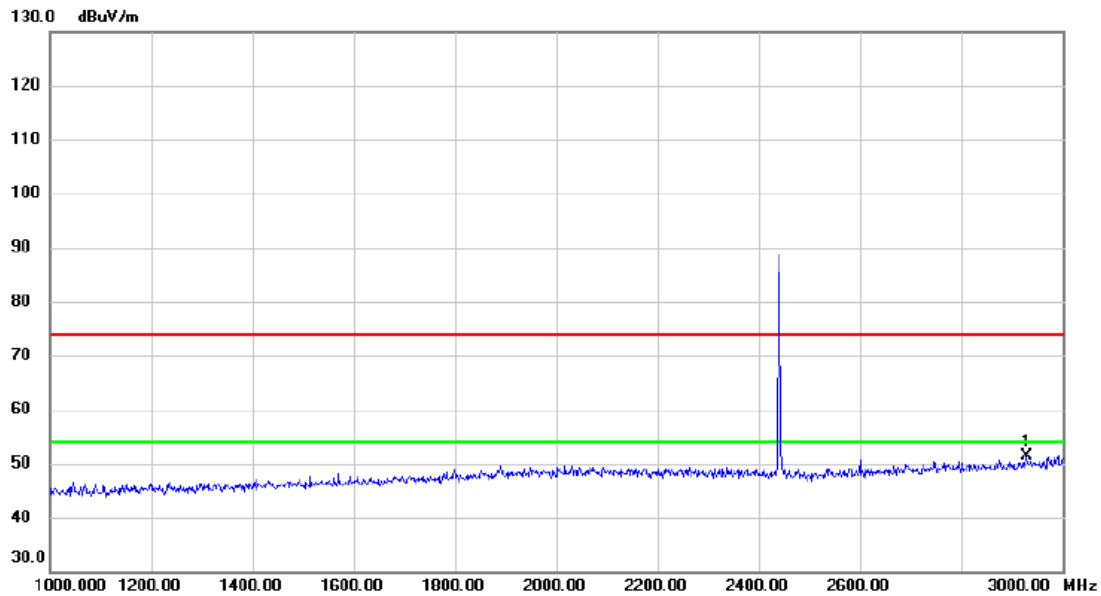


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2928.000 | 42.35         | 9.03           | 51.38       | 74.00  | -22.62 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M  $\pi/4$ -DQPSK

## Vertical

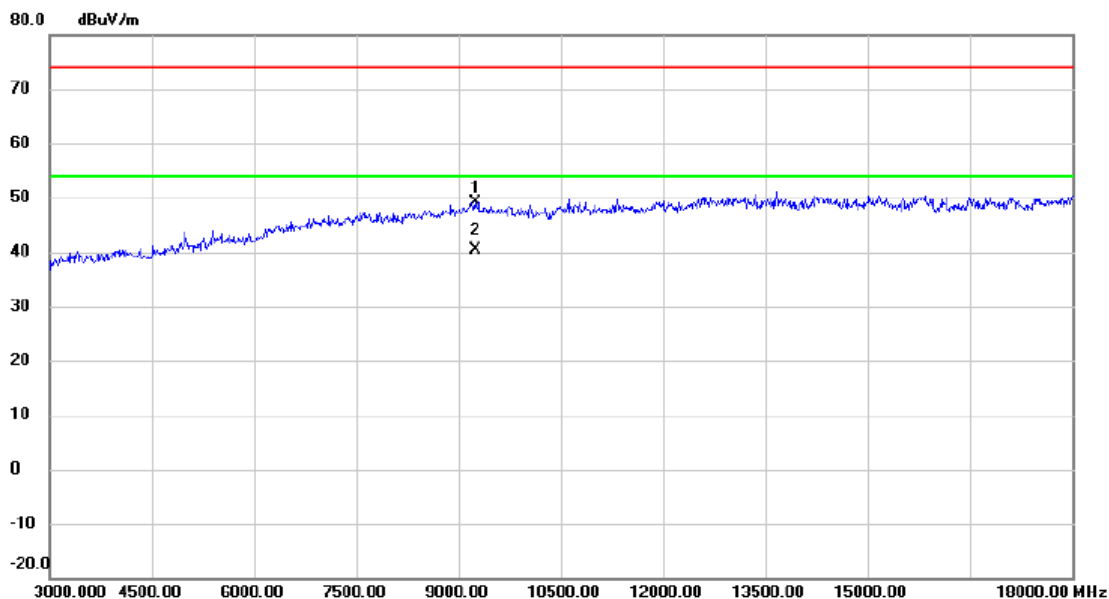


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 9240.000     | 38.27                    | 10.80                   | 49.07                      | 74.00           | -24.93       | peak     |         |
| 2   | *   | 9240.000     | 29.57                    | 10.80                   | 40.37                      | 54.00           | -13.63       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M  $\pi/4$ -DQPSK

## Vertical

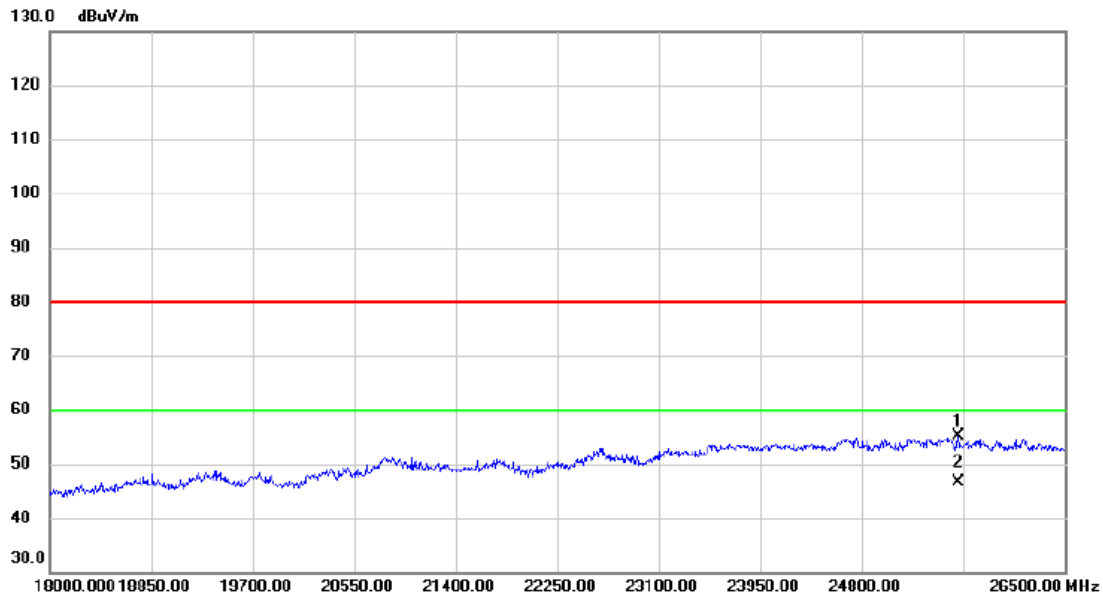


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 25607.50     | 25.02                    | 30.15                   | 55.17                      | 80.00           | -24.83       | peak     |         |
| 2   | *   | 25607.50     | 16.39                    | 30.15                   | 46.54                      | 60.00           | -13.46       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M  $\pi/4$ -DQPSK

## Horizontal

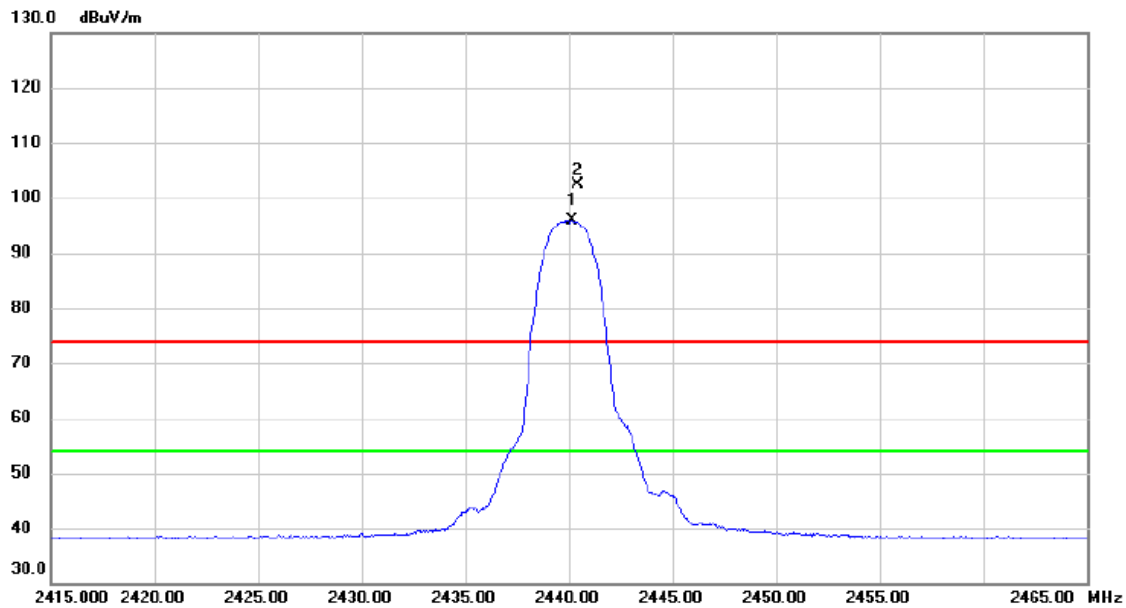


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 2440.150     | 88.98                    | 6.84                    | 95.82                      | 54.00           | 41.82        | AVG      | No Limit |
| 2   | X   | 2440.400     | 95.56                    | 6.84                    | 102.40                     | 74.00           | 28.40        | peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M  $\pi/4$ -DQPSK

## Horizontal

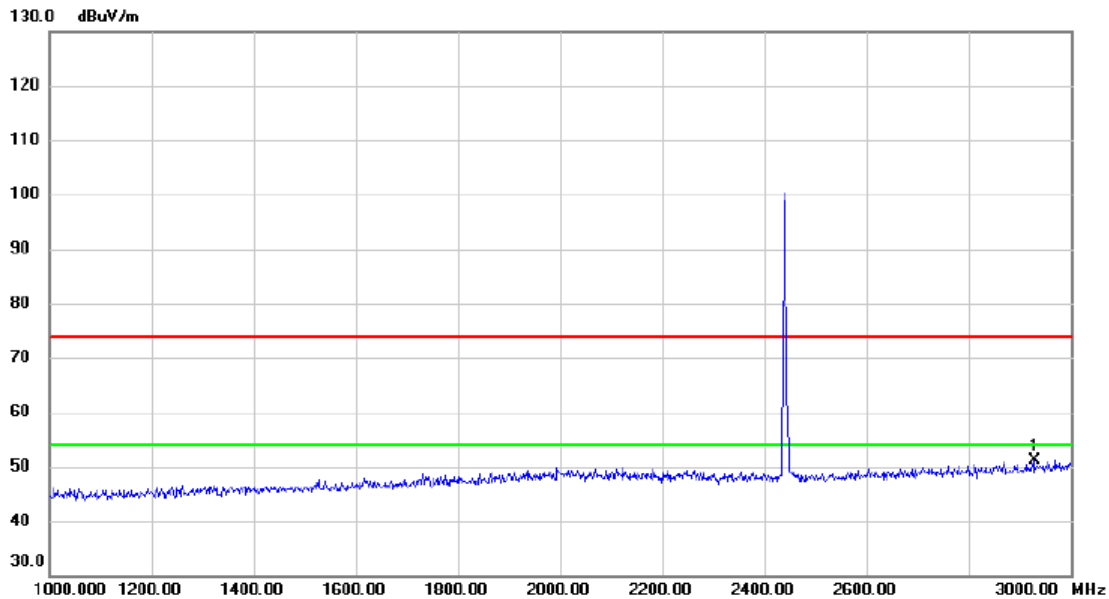


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2928.000 | 42.22         | 9.03           | 51.25       | 74.00  | -22.75 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|            |                                         |
|------------|-----------------------------------------|
| Test Mode: | TX 2440 MHz _CH18_UHD 2M $\pi/4$ -DQPSK |
|------------|-----------------------------------------|

## Horizontal

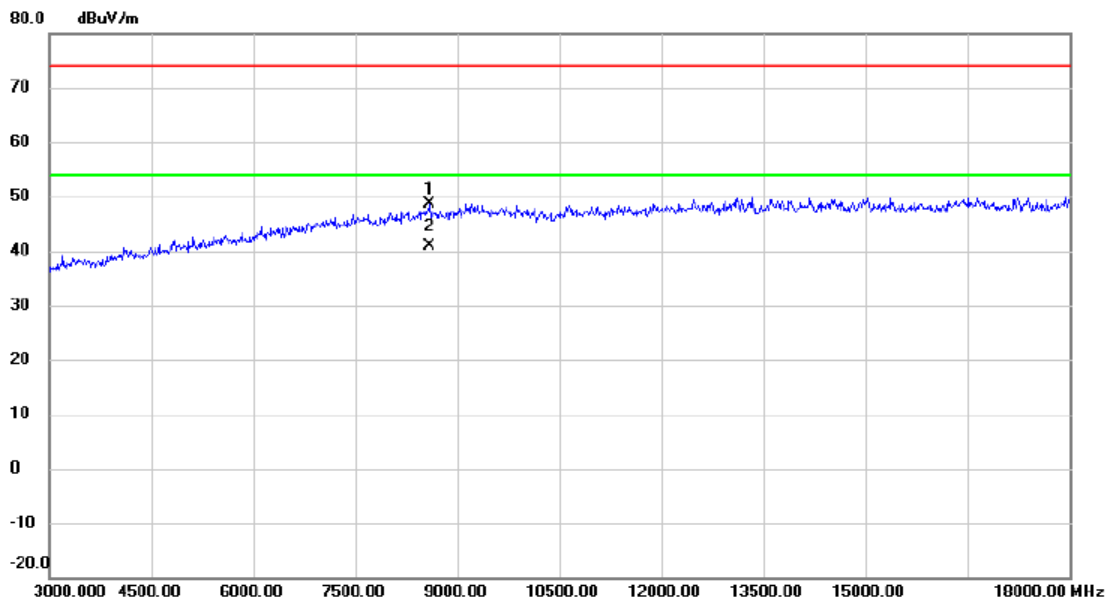


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8595.000     | 38.39                    | 10.23                   | 48.62                      | 74.00           | -25.38       | peak     |         |
| 2   | *   | 8595.000     | 30.58                    | 10.23                   | 40.81                      | 54.00           | -13.19       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M  $\pi/4$ -DQPSK

## Horizontal

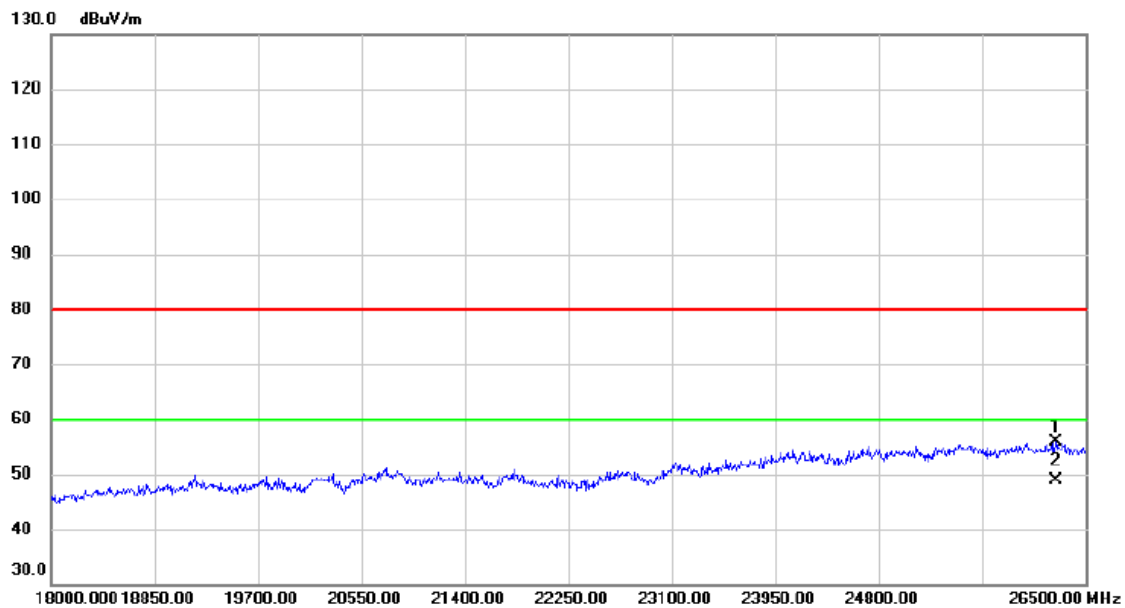

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 26253.50     | 24.60                    | 31.32                   | 55.92                      | 80.00           | -24.08       | peak     |         |
| 2   | *   | 26253.50     | 17.62                    | 31.32                   | 48.94                      | 60.00           | -11.06       | AVG      |         |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M  $\pi/4$ -DQPSK

## Vertical

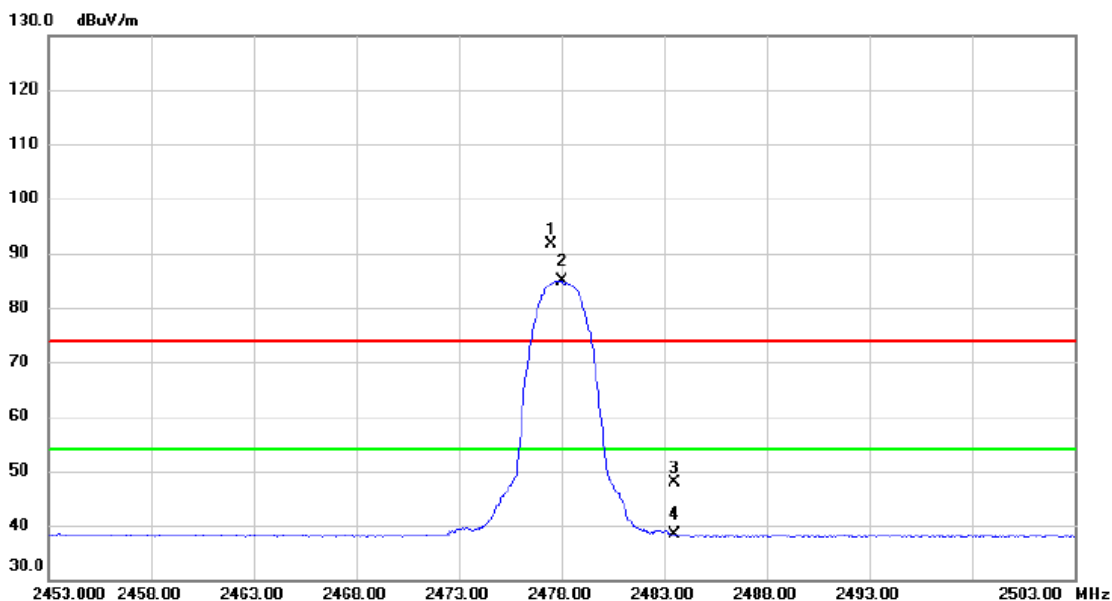

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 2477.500     | 84.76                    | 6.79                    | 91.55                      | 74.00           | 17.55        | peak     | No Limit |
| 2   | *   | 2478.000     | 78.16                    | 6.80                    | 84.96                      | 54.00           | 30.96        | AVG      | No Limit |
| 3   |     | 2483.500     | 41.18                    | 6.80                    | 47.98                      | 74.00           | -26.02       | peak     |          |
| 4   |     | 2483.500     | 31.52                    | 6.80                    | 38.32                      | 54.00           | -15.68       | AVG      |          |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M  $\pi/4$ -DQPSK

## Vertical

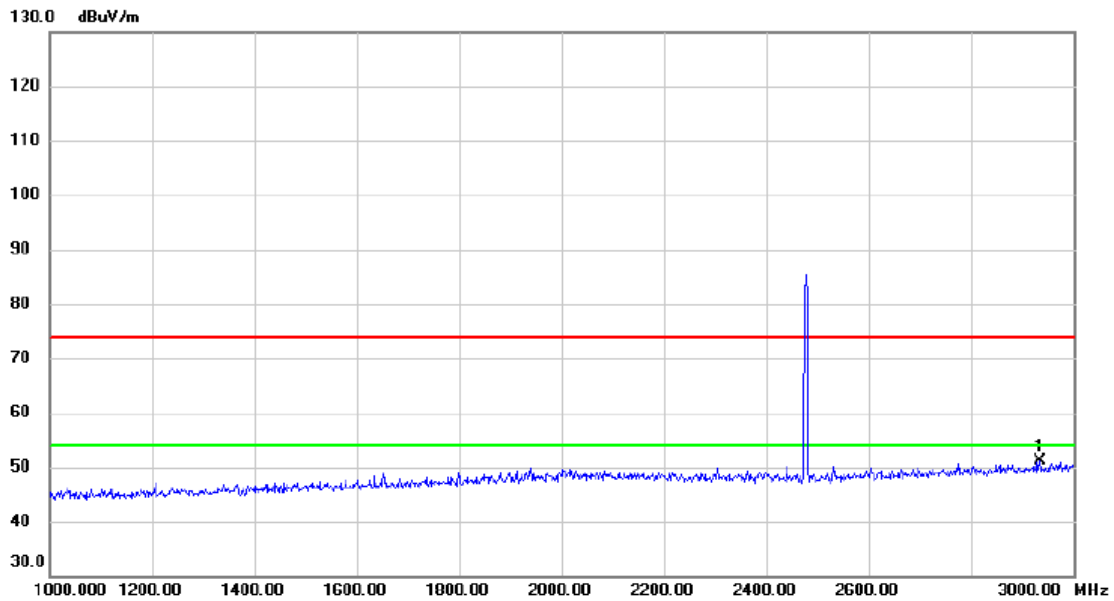


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2934.000 | 42.13         | 9.05           | 51.18       | 74.00  | -22.82 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M  $\pi/4$ -DQPSK

## Vertical

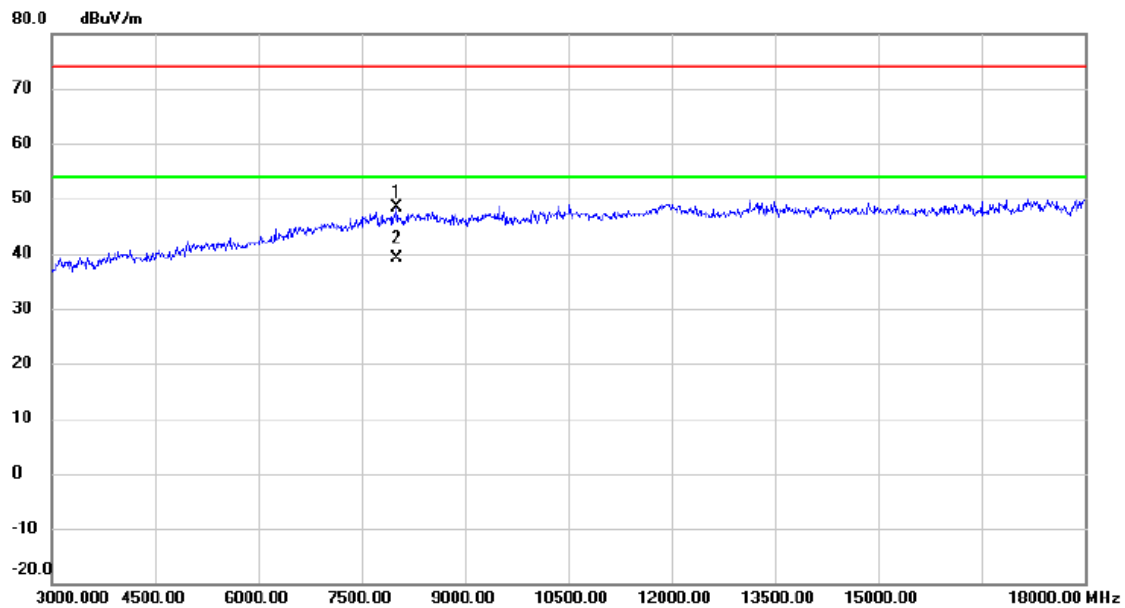


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8010.000     | 38.94                    | 9.44                    | 48.38                      | 74.00           | -25.62       | peak     |         |
| 2   | *   | 8010.000     | 29.63                    | 9.44                    | 39.07                      | 54.00           | -14.93       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M  $\pi/4$ -DQPSK

## Vertical

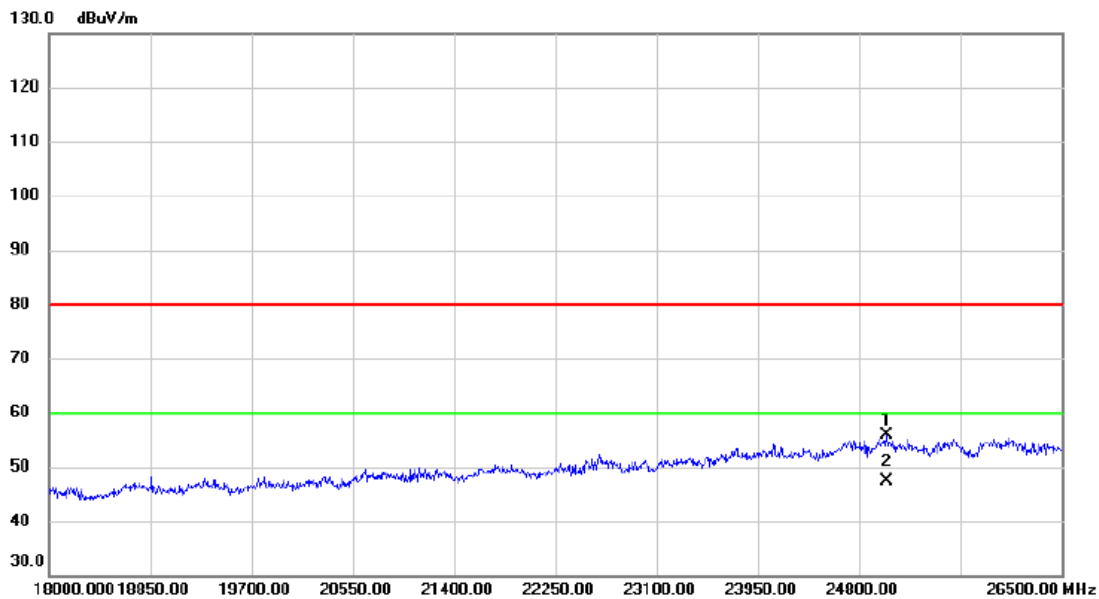


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 25029.50     | 25.37                    | 30.50                   | 55.87                      | 80.00           | -24.13       | peak     |         |
| 2   | *   | 25029.50     | 16.85                    | 30.50                   | 47.35                      | 60.00           | -12.65       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M  $\pi/4$ -DQPSK

## Horizontal

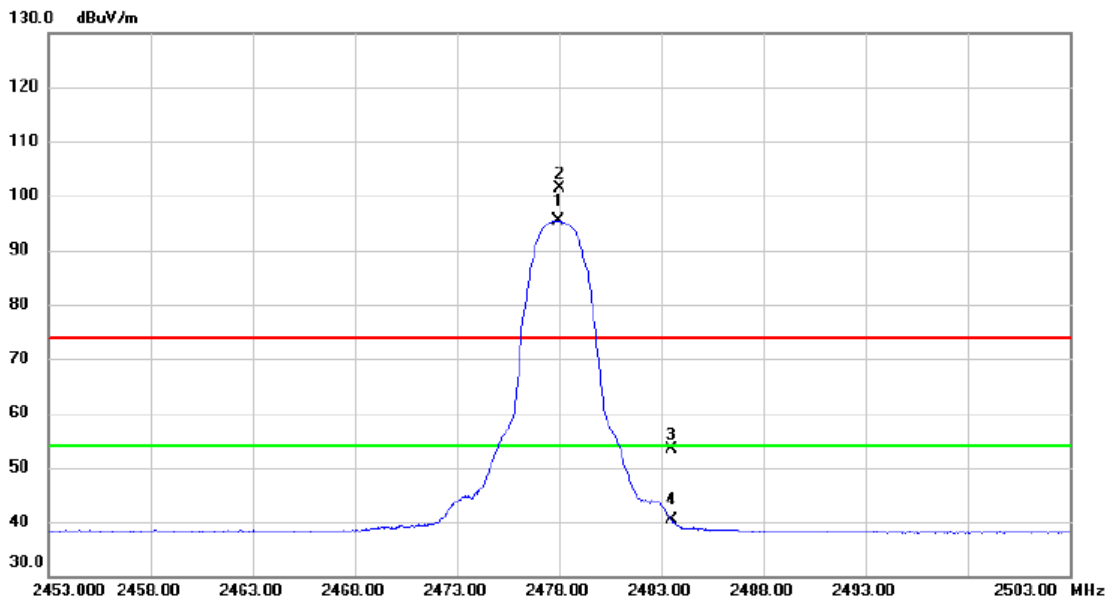


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 2477.950     | 88.61                    | 6.80                    | 95.41                      | 54.00           | 41.41        | AVG      | No Limit |
| 2   | X   | 2478.050     | 94.65                    | 6.80                    | 101.45                     | 74.00           | 27.45        | peak     | No Limit |
| 3   |     | 2483.500     | 46.64                    | 6.80                    | 53.44                      | 74.00           | -20.56       | peak     |          |
| 4   |     | 2483.500     | 33.67                    | 6.80                    | 40.47                      | 54.00           | -13.53       | AVG      |          |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M  $\pi/4$ -DQPSK

## Horizontal

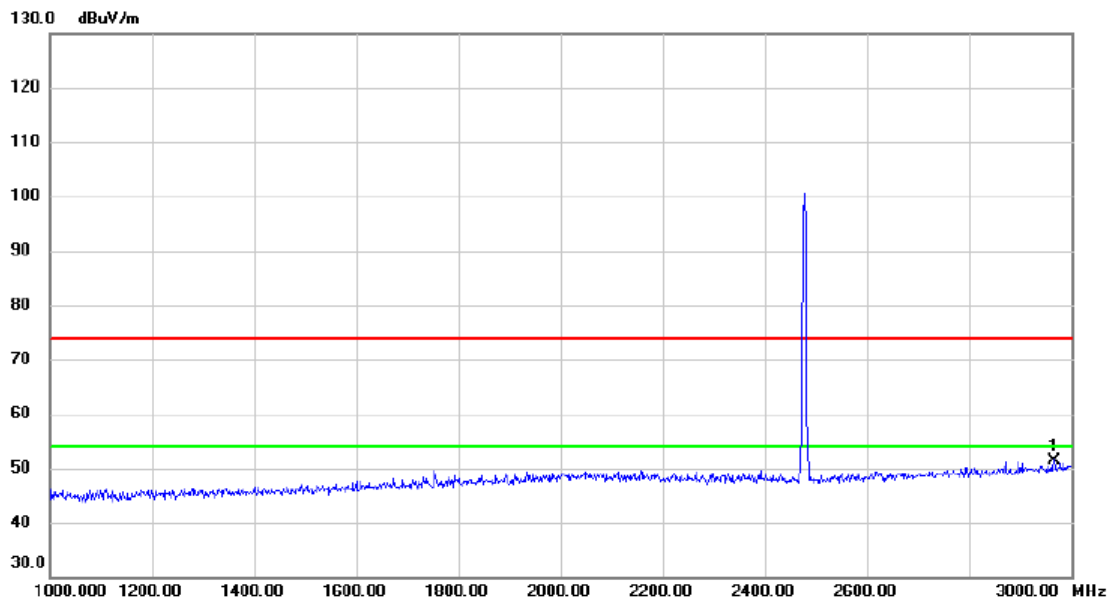


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 2966.000     | 42.28                    | 9.22                    | 51.50                      | 74.00           | -22.50       | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M  $\pi/4$ -DQPSK

## Horizontal

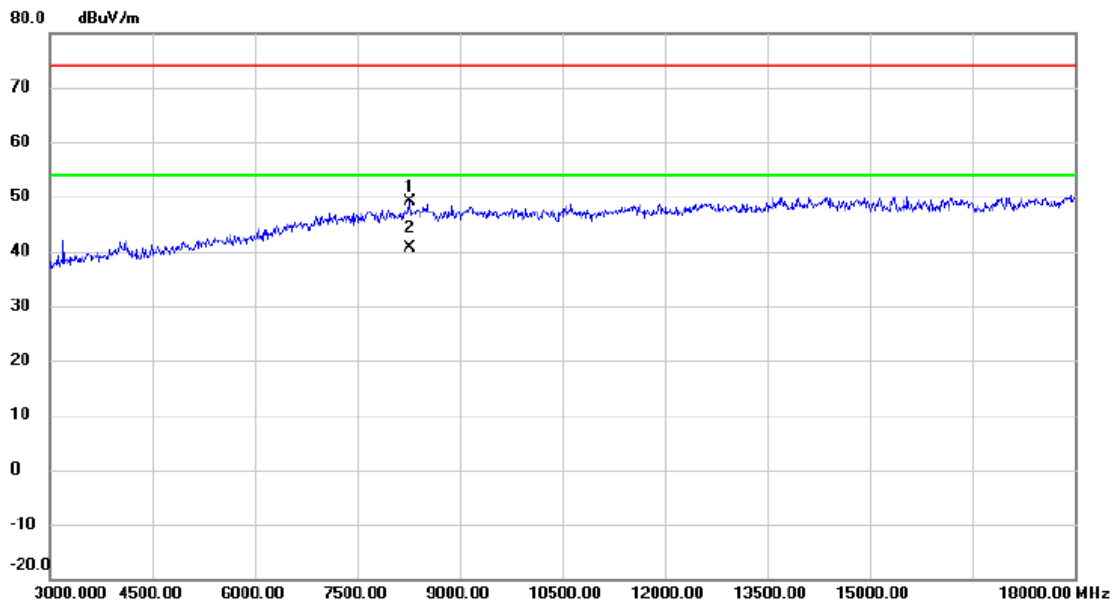


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8265.000     | 39.23                    | 9.81                    | 49.04                      | 74.00           | -24.96       | peak     |         |
| 2   | *   | 8265.000     | 30.89                    | 9.81                    | 40.70                      | 54.00           | -13.30       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M  $\pi/4$ -DQPSK

## Horizontal

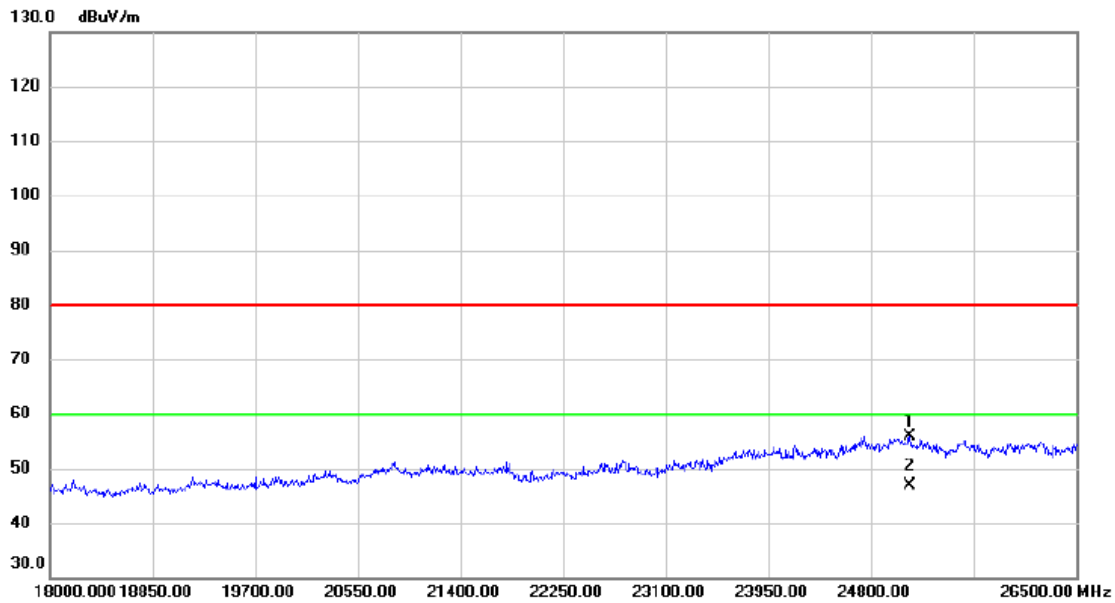


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 25123.00     | 25.53                    | 30.42                   | 55.95                      | 80.00           | -24.05       | peak     |         |
| 2   | *   | 25123.00     | 16.58                    | 30.42                   | 47.00                      | 60.00           | -13.00       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M 8DPSK

## Vertical

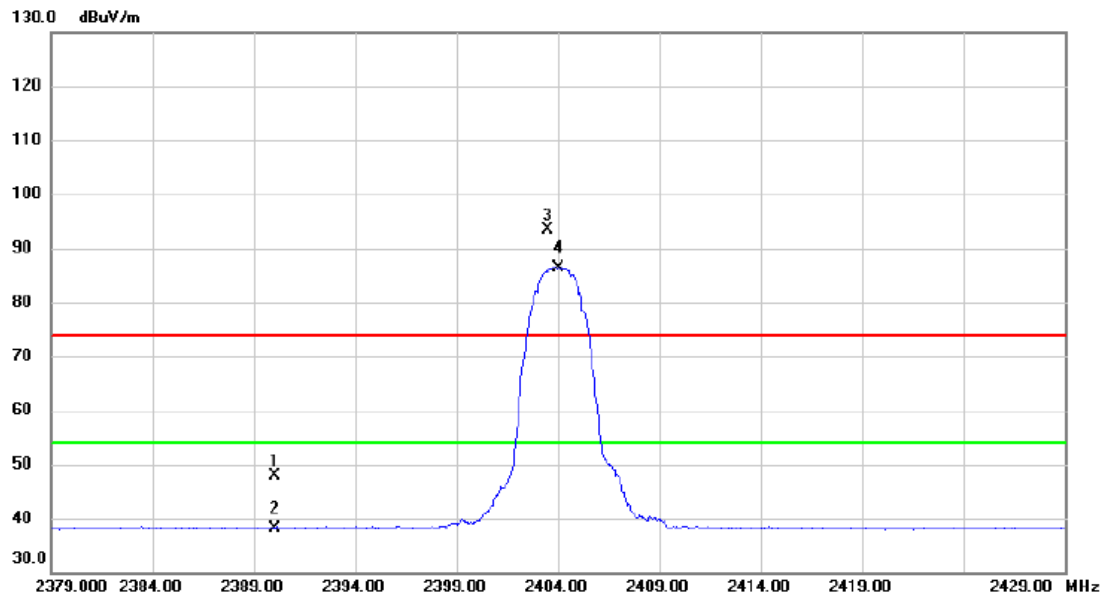

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment  |
| 1   |     | 2390.000 | 40.99         | 6.89           | 47.88       | 74.00  | -26.12 | peak     |          |
| 2   |     | 2390.000 | 31.33         | 6.89           | 38.22       | 54.00  | -15.78 | AVG      |          |
| 3   | X   | 2403.500 | 86.59         | 6.88           | 93.47       | 74.00  | 19.47  | peak     | No Limit |
| 4   | *   | 2404.000 | 79.46         | 6.88           | 86.34       | 54.00  | 32.34  | AVG      | No Limit |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M 8DPSK

## Vertical

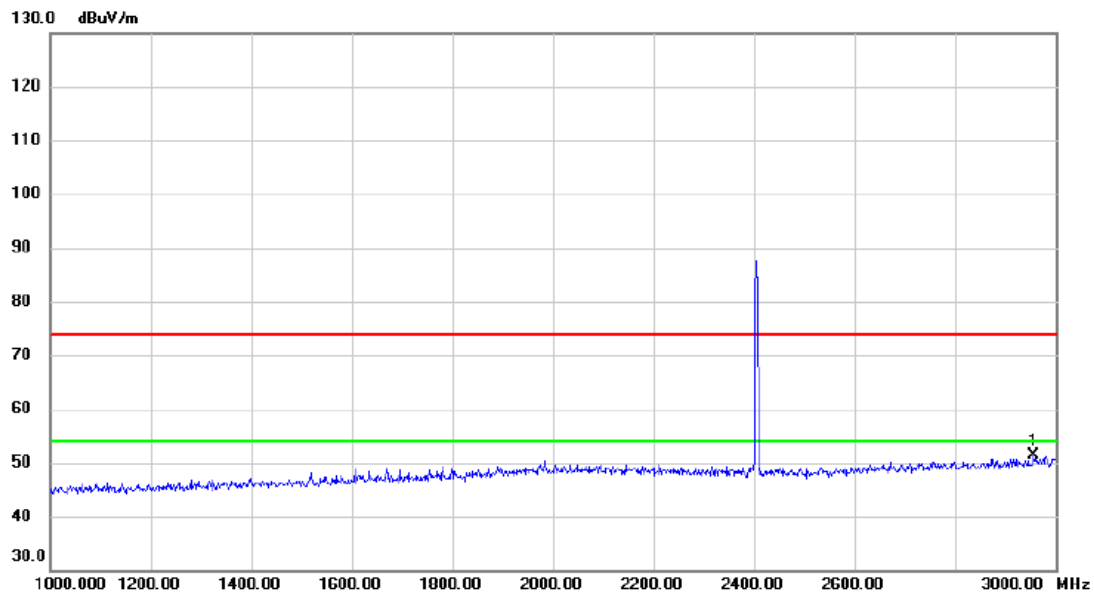


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 2956.000     | 42.11                    | 9.17                    | 51.28                      | 74.00           | -22.72       | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M 8DPSK

## Vertical

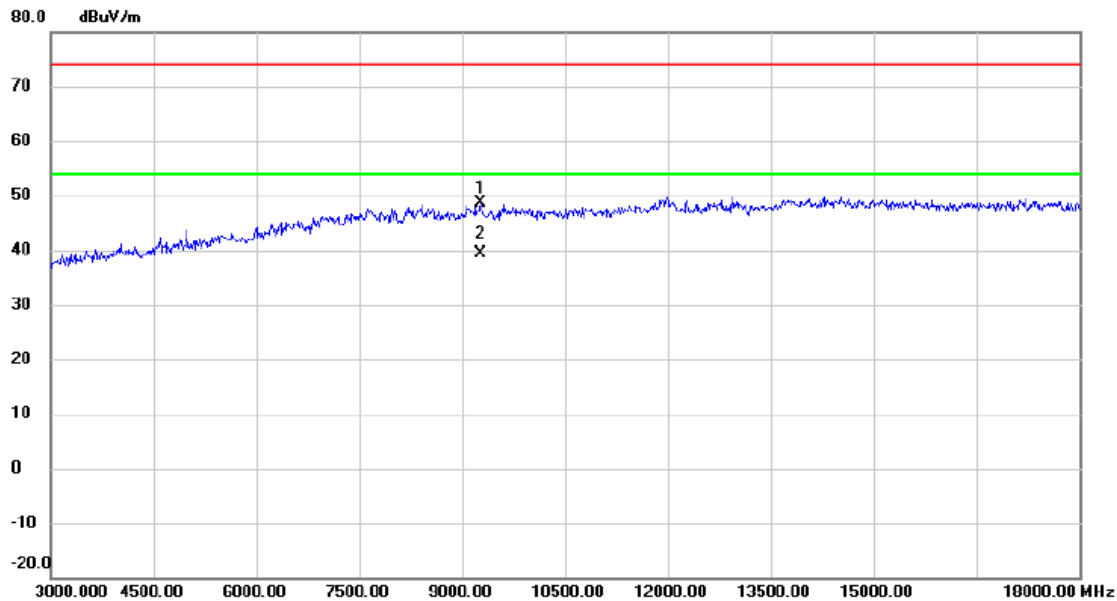


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 9270.000     | 37.72                    | 10.83                   | 48.55                      | 74.00           | -25.45       | peak     |         |
| 2   | *   | 9270.000     | 28.45                    | 10.83                   | 39.28                      | 54.00           | -14.72       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M 8DPSK

## Vertical

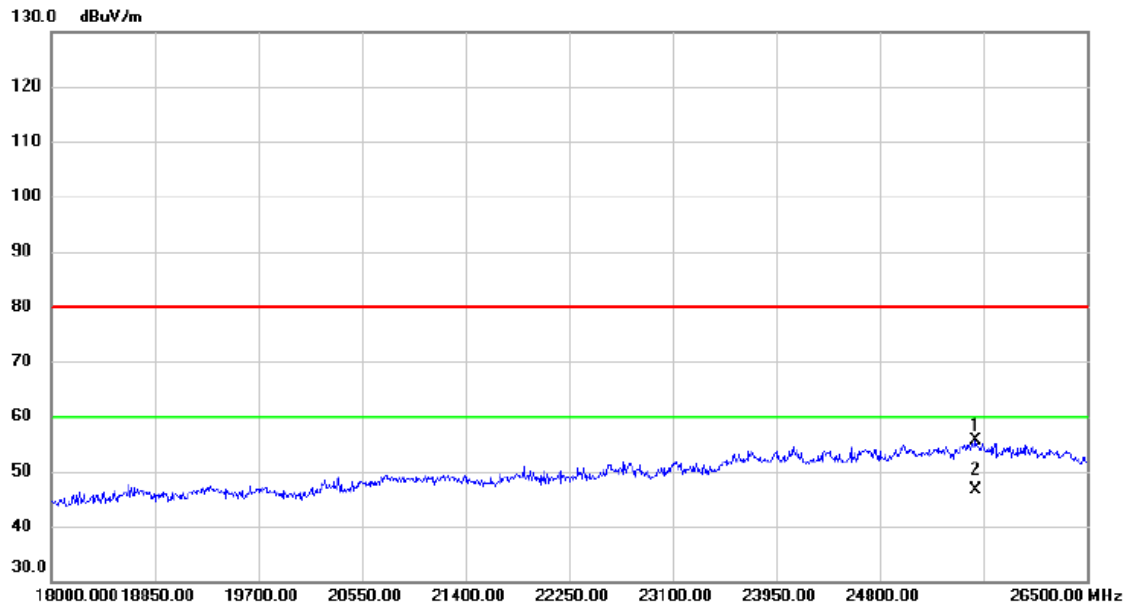


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 25582.00     | 25.46                    | 30.13                   | 55.59                      | 80.00           | -24.41       | peak     |         |
| 2   | *   | 25582.00     | 16.54                    | 30.13                   | 46.67                      | 60.00           | -13.33       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M 8DPSK

## Horizontal

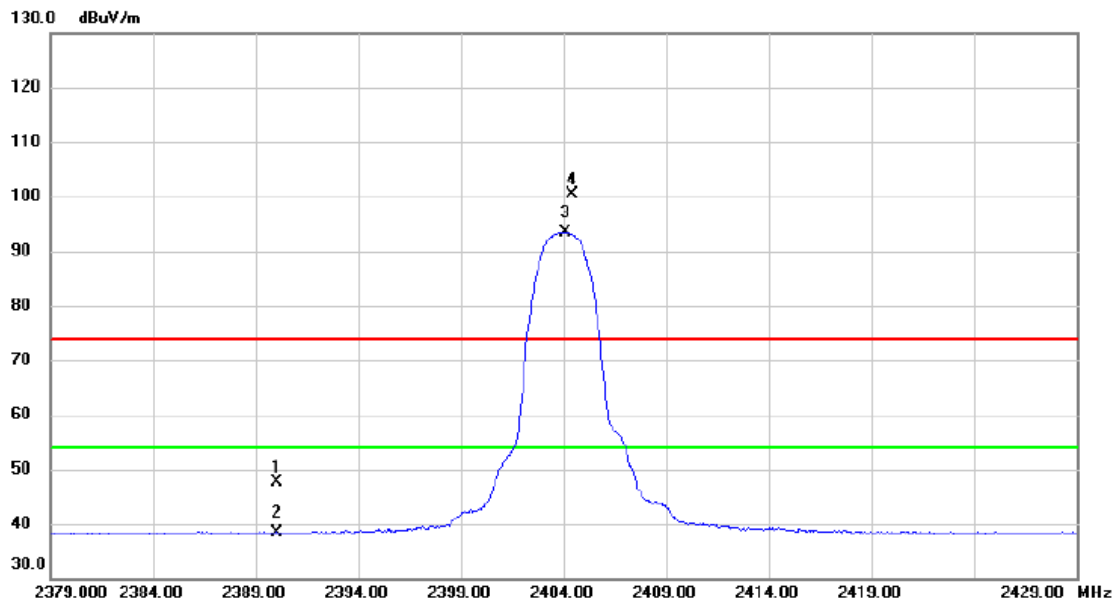


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 2390.000     | 40.72                    | 6.89                    | 47.61                      | 74.00           | -26.39       | peak     |          |
| 2   |     | 2390.000     | 31.61                    | 6.89                    | 38.50                      | 54.00           | -15.50       | AVG      |          |
| 3   | *   | 2404.100     | 86.53                    | 6.88                    | 93.41                      | 54.00           | 39.41        | AVG      | No Limit |
| 4   | X   | 2404.450     | 93.58                    | 6.88                    | 100.46                     | 74.00           | 26.46        | peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M 8DPSK

## Horizontal

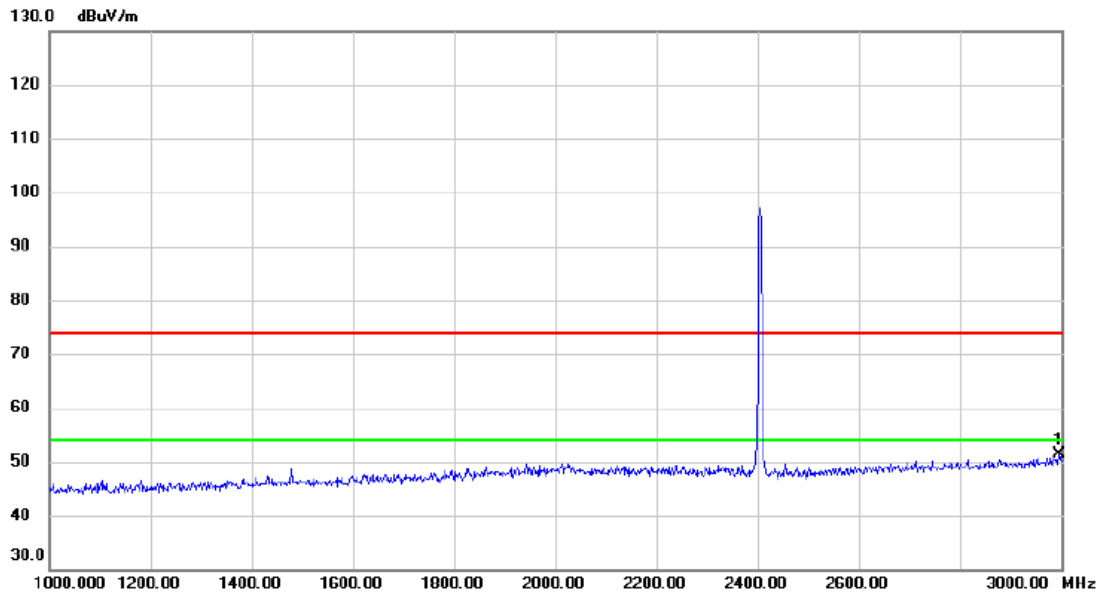


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 2996.000     | 42.09                    | 9.38                    | 51.47                      | 74.00           | -22.53       | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M 8DPSK

## Horizontal

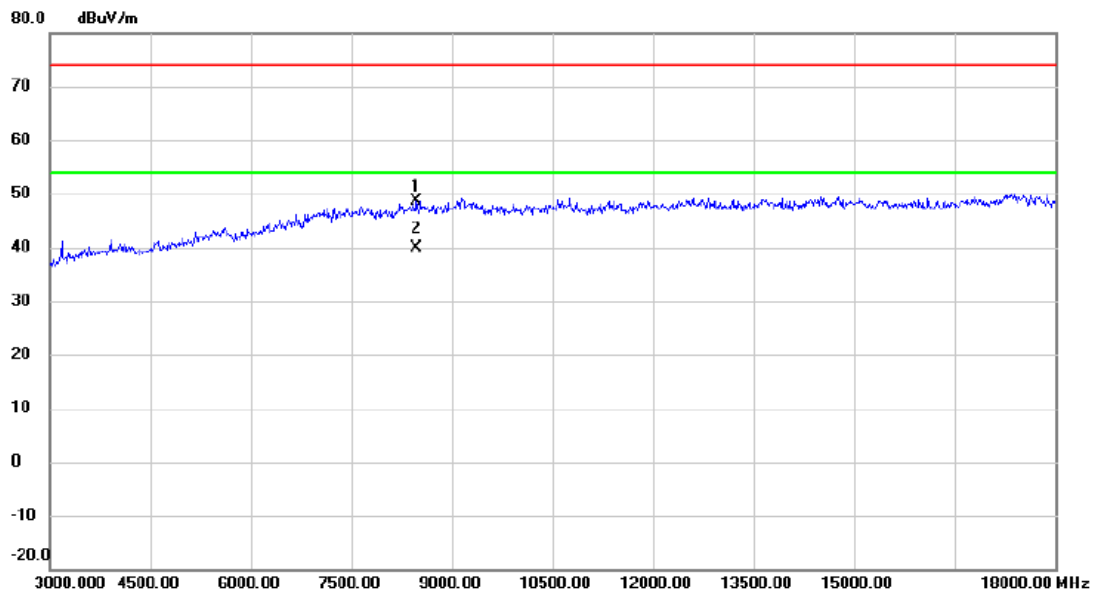


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8475.000     | 38.48                    | 10.12                   | 48.60                      | 74.00           | -25.40       | peak     |         |
| 2   | *   | 8475.000     | 29.67                    | 10.12                   | 39.79                      | 54.00           | -14.21       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 2M 8DPSK

## Horizontal

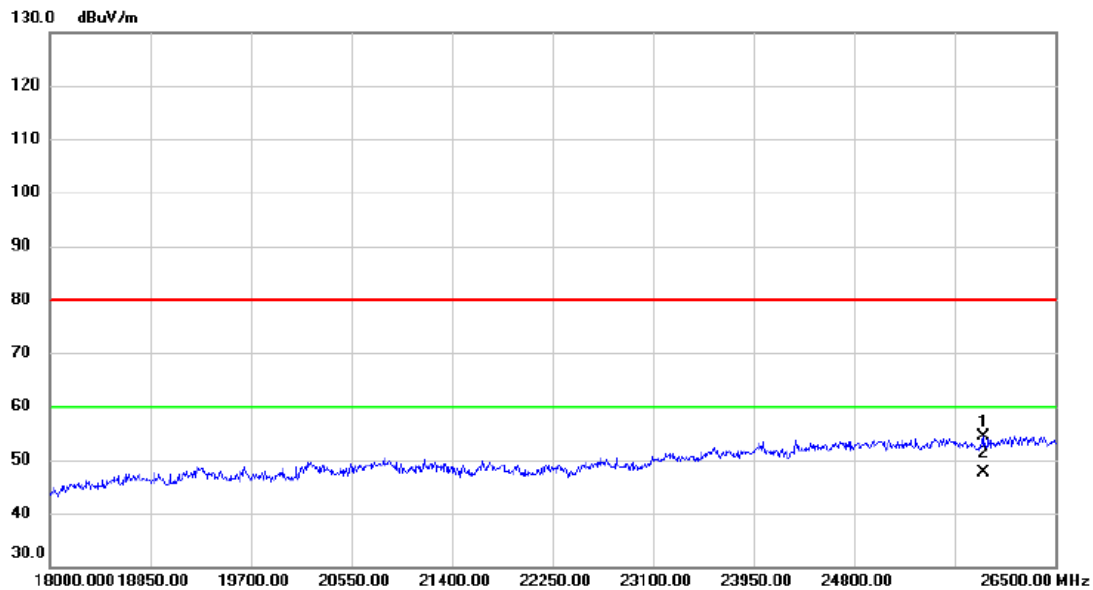


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 25888.00     | 24.16                    | 30.33                   | 54.49                      | 80.00           | -25.51       | peak     |         |
| 2   | *   | 25888.00     | 17.31                    | 30.33                   | 47.64                      | 60.00           | -12.36       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M 8DPSK

## Vertical

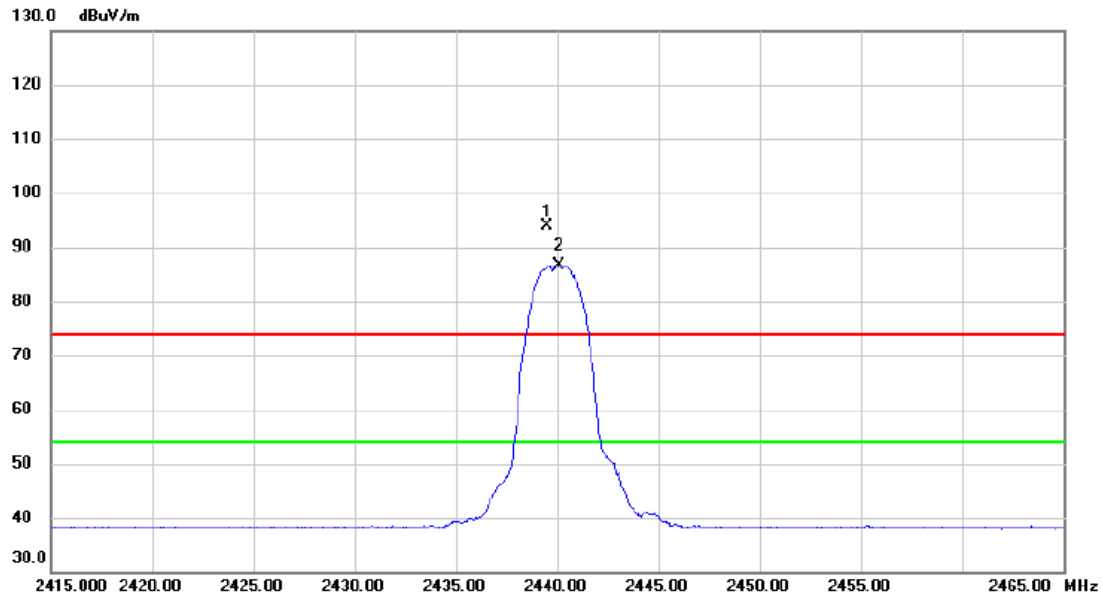


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment  |
| 1   | X   | 2439.500 | 86.96         | 6.85           | 93.81       | 74.00  | 19.81  | peak     | No Limit |
| 2   | *   | 2440.100 | 79.86         | 6.84           | 86.70       | 54.00  | 32.70  | AVG      | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|            |                                |
|------------|--------------------------------|
| Test Mode: | TX 2440 MHz _CH18_UHD 2M 8DPSK |
|------------|--------------------------------|

## Vertical

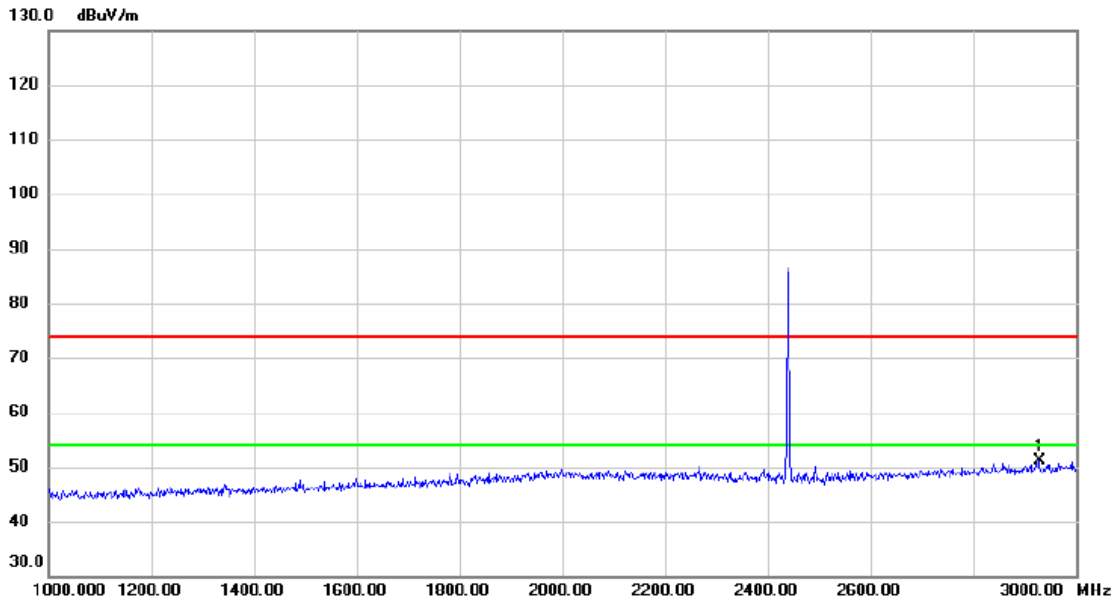


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2928.000 | 42.19         | 9.03           | 51.22       | 74.00  | -22.78 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M 8DPSK

## Vertical

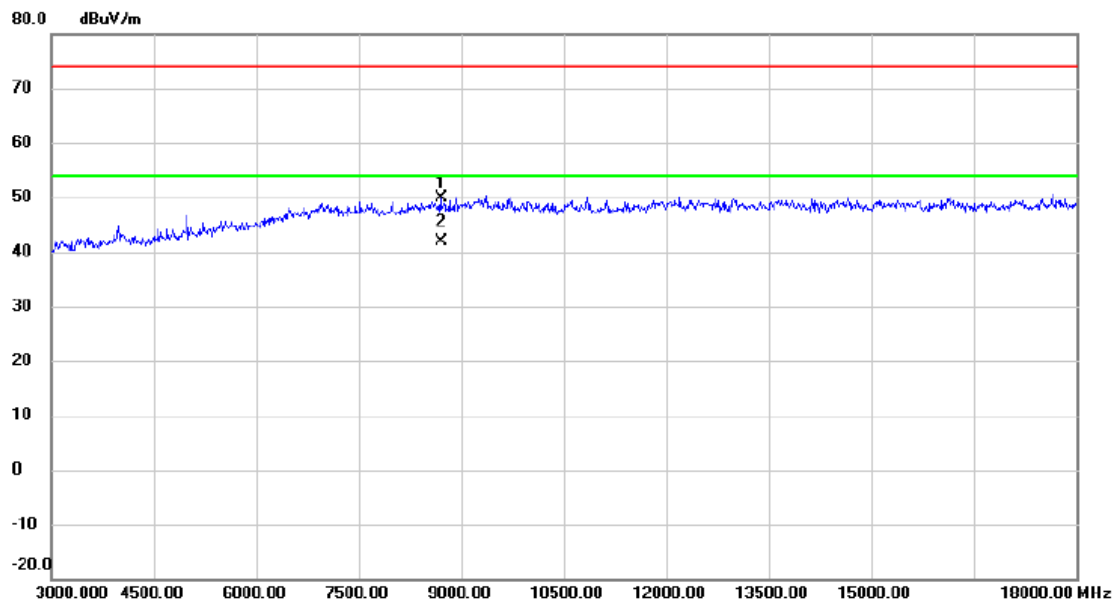


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8700.000     | 39.63                    | 10.31                   | 49.94                      | 74.00           | -24.06       | peak     |         |
| 2   | *   | 8700.000     | 31.50                    | 10.31                   | 41.81                      | 54.00           | -12.19       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M 8DPSK

## Vertical

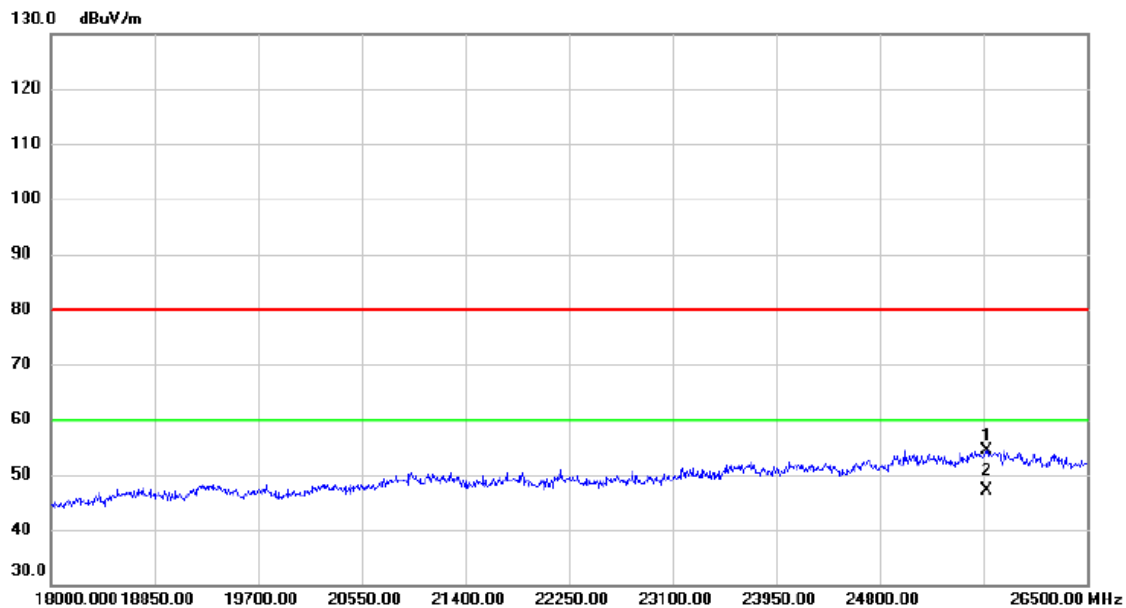


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 25675.50     | 24.29                    | 30.19                   | 54.48                      | 80.00           | -25.52       | peak     |         |
| 2   | *   | 25675.50     | 16.92                    | 30.19                   | 47.11                      | 60.00           | -12.89       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M 8DPSK

## Horizontal

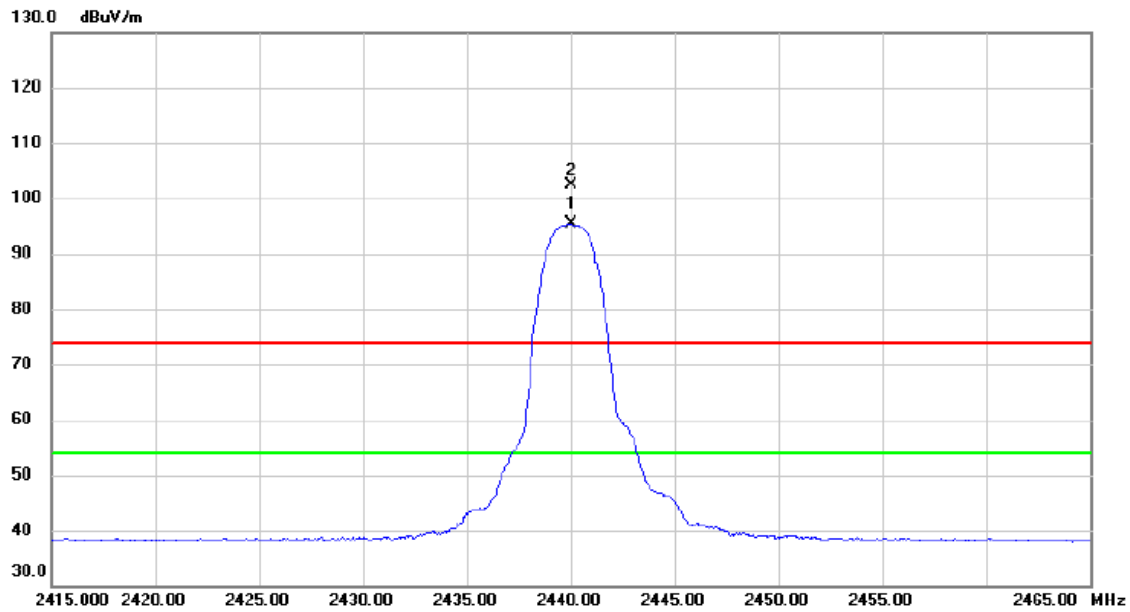


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | *   | 2440.000     | 88.54                    | 6.84                    | 95.38                      | 54.00           | 41.38        | AVG      | No Limit |
| 2   | X   | 2440.050     | 95.62                    | 6.84                    | 102.46                     | 74.00           | 28.46        | peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M 8DPSK

## Horizontal

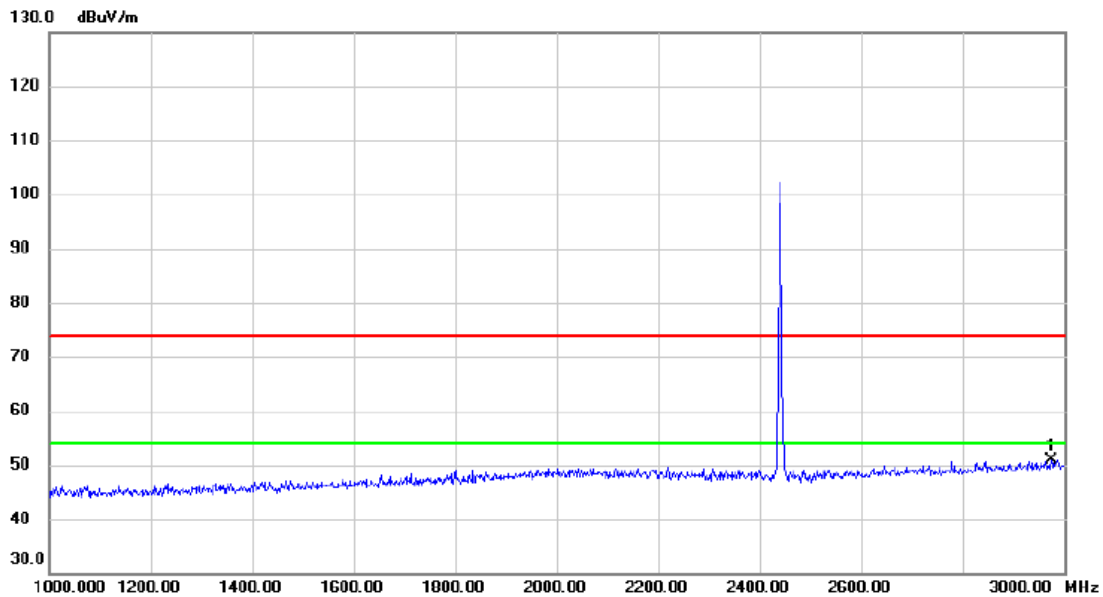


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2974.000 | 41.60         | 9.26           | 50.86       | 74.00  | -23.14 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 2M 8DPSK

## Horizontal

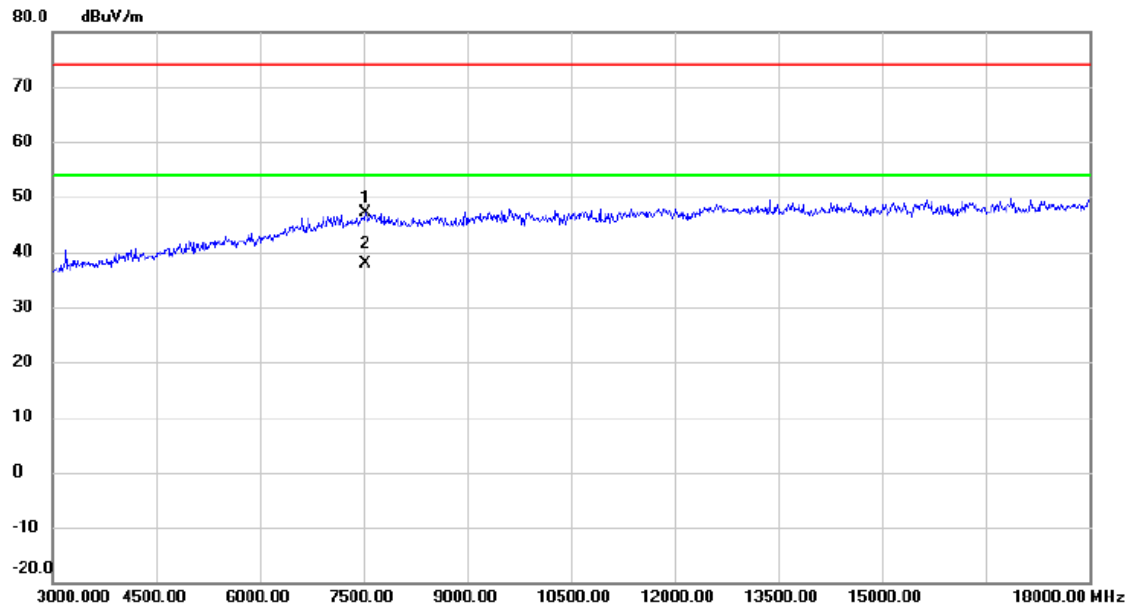

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7530.000     | 37.46                    | 9.57                    | 47.03                      | 74.00           | -26.97       | peak     |         |
| 2   | *   | 7530.000     | 28.35                    | 9.57                    | 37.92                      | 54.00           | -16.08       | AVG      |         |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|            |                                |
|------------|--------------------------------|
| Test Mode: | TX 2440 MHz _CH18_UHD 2M 8DPSK |
|------------|--------------------------------|

## Horizontal

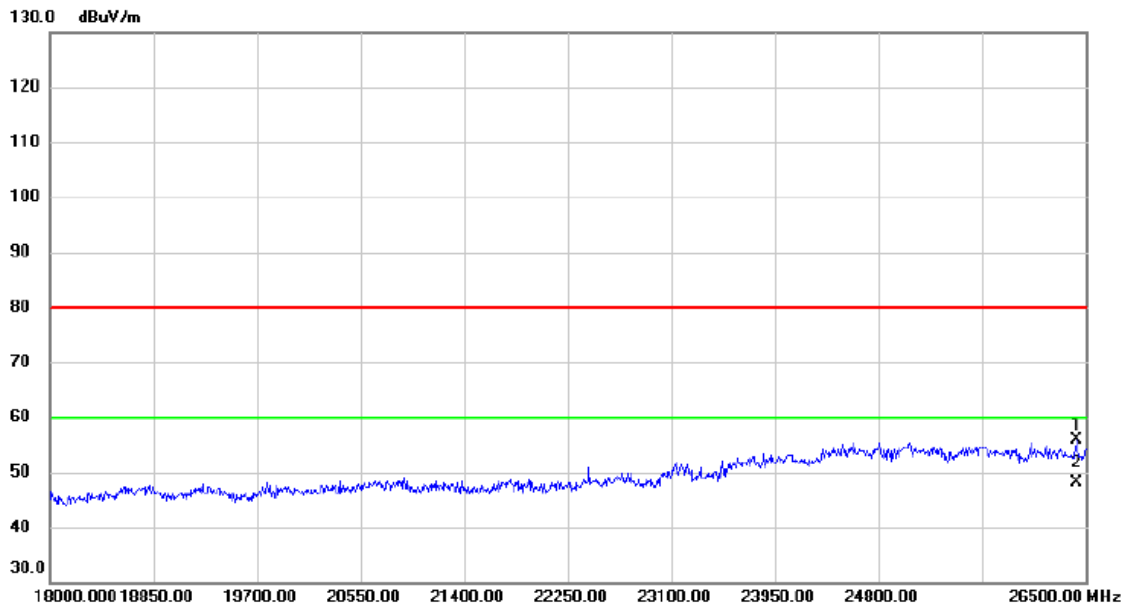


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 26423.50     | 23.83                    | 31.93                   | 55.76                      | 80.00           | -24.24       | peak     |         |
| 2   | *   | 26423.50     | 16.08                    | 31.93                   | 48.01                      | 60.00           | -11.99       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M 8DPSK

## Vertical

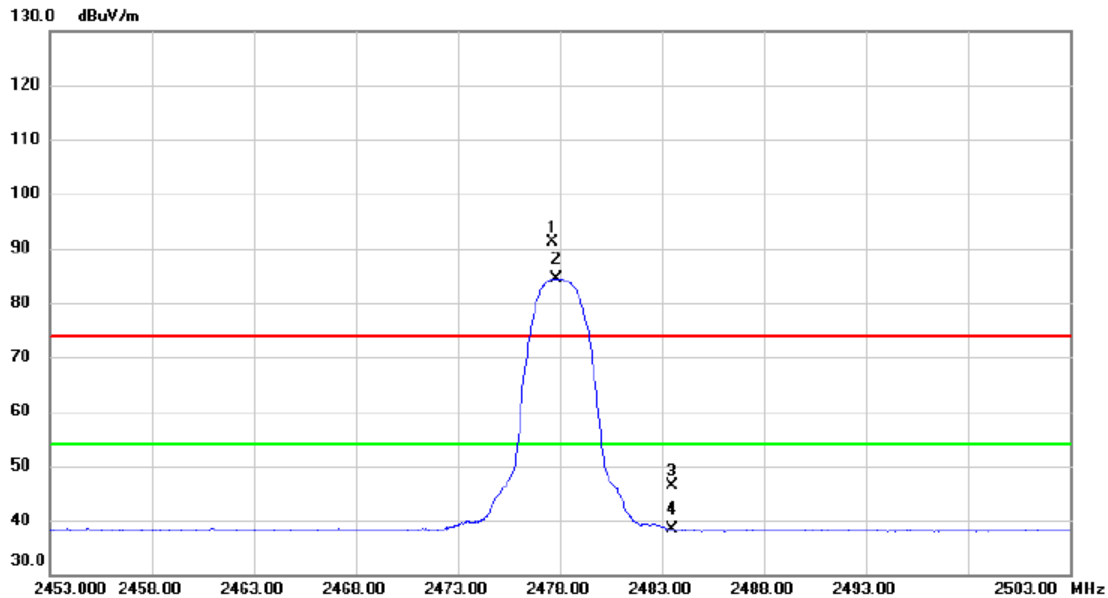


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 2477.650     | 84.39                    | 6.79                    | 91.18                      | 74.00           | 17.18        | peak     | No Limit |
| 2   | *   | 2477.800     | 77.64                    | 6.80                    | 84.44                      | 54.00           | 30.44        | AVG      | No Limit |
| 3   |     | 2483.500     | 39.62                    | 6.80                    | 46.42                      | 74.00           | -27.58       | peak     |          |
| 4   |     | 2483.500     | 31.55                    | 6.80                    | 38.35                      | 54.00           | -15.65       | AVG      |          |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M 8DPSK

## Vertical

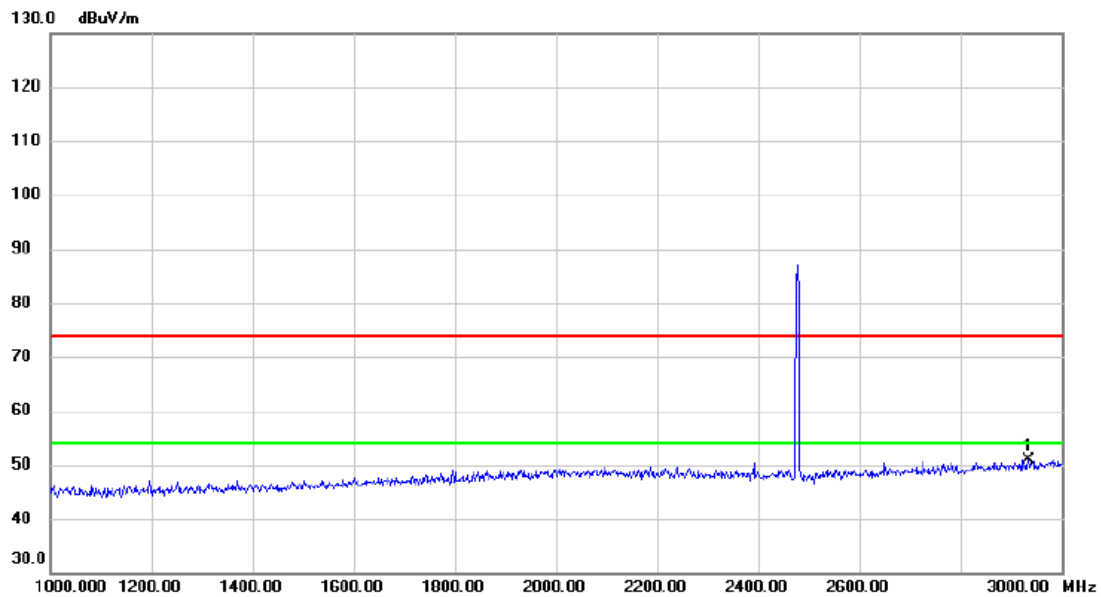


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2934.000 | 41.95         | 9.05           | 51.00       | 74.00  | -23.00 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|            |                                |
|------------|--------------------------------|
| Test Mode: | TX 2478 MHz _CH37_UHD 2M 8DPSK |
|------------|--------------------------------|

## Vertical

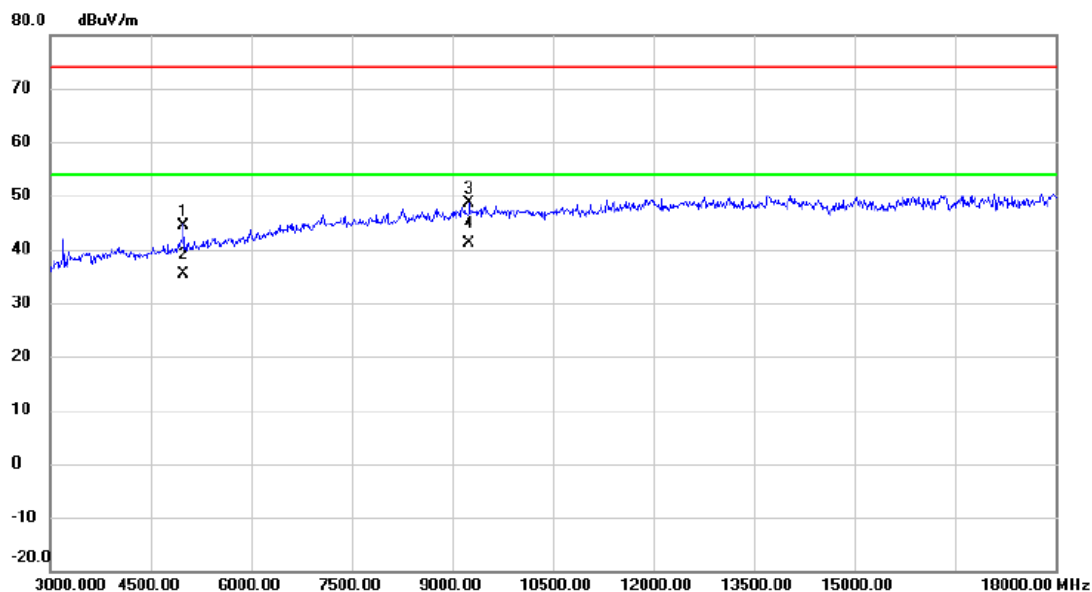


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 4995.000     | 40.24                    | 4.12                    | 44.36                      | 74.00           | -29.64       | peak     |         |
| 2   |     | 4995.000     | 31.25                    | 4.12                    | 35.37                      | 54.00           | -18.63       | AVG      |         |
| 3   |     | 9255.000     | 37.87                    | 10.82                   | 48.69                      | 74.00           | -25.31       | peak     |         |
| 4   | *   | 9255.000     | 30.20                    | 10.82                   | 41.02                      | 54.00           | -12.98       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M 8DPSK

## Vertical

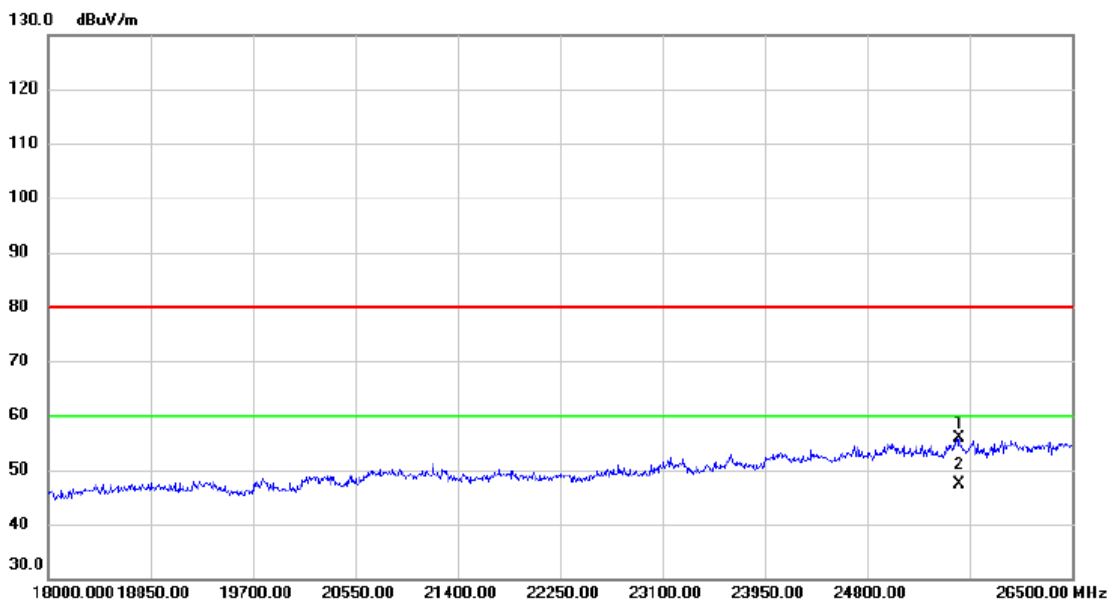


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 25565.00     | 25.64                    | 30.12                   | 55.76                      | 80.00           | -24.24       | peak     |         |
| 2   | *   | 25565.00     | 17.34                    | 30.12                   | 47.46                      | 60.00           | -12.54       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M 8DPSK

## Horizontal

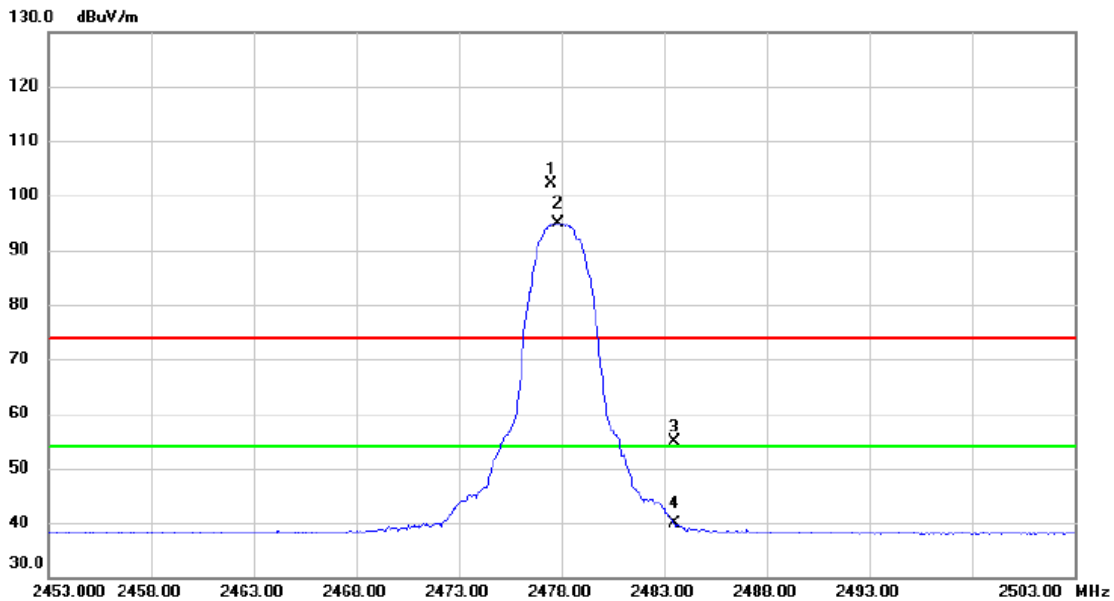

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 2477.500     | 95.27                    | 6.79                    | 102.06                     | 74.00           | 28.06        | peak     | No Limit |
| 2   | *   | 2477.850     | 88.07                    | 6.80                    | 94.87                      | 54.00           | 40.87        | AVG      | No Limit |
| 3   |     | 2483.500     | 48.00                    | 6.80                    | 54.80                      | 74.00           | -19.20       | peak     |          |
| 4   |     | 2483.500     | 33.11                    | 6.80                    | 39.91                      | 54.00           | -14.09       | AVG      |          |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M 8DPSK

## Horizontal

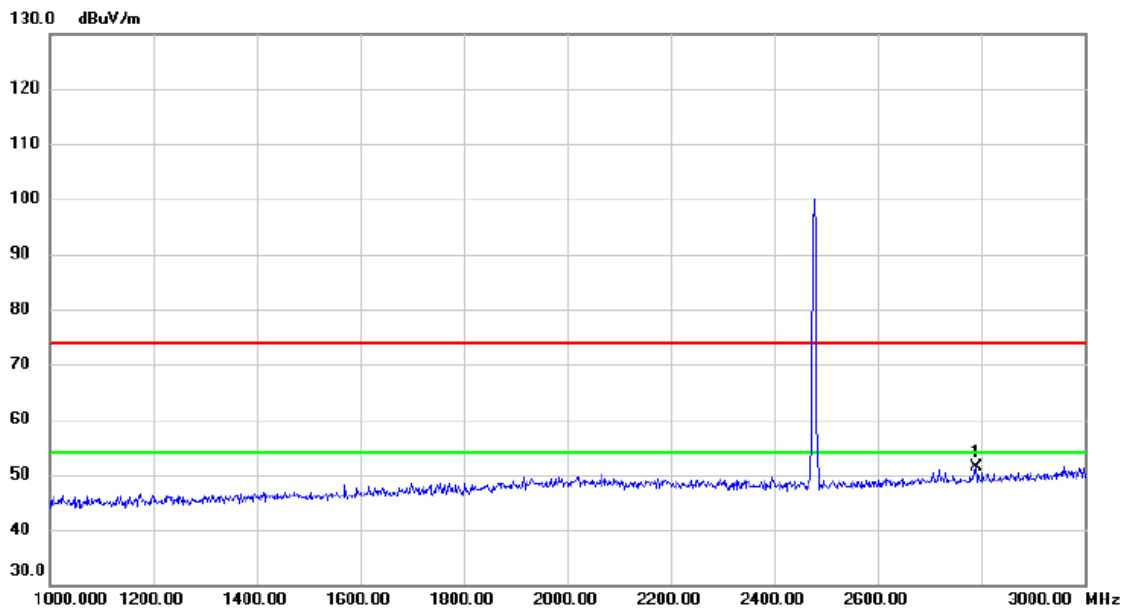

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2790.000 | 43.04         | 8.30           | 51.34       | 74.00  | -22.66 | peak     |         |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M 8DPSK

## Horizontal

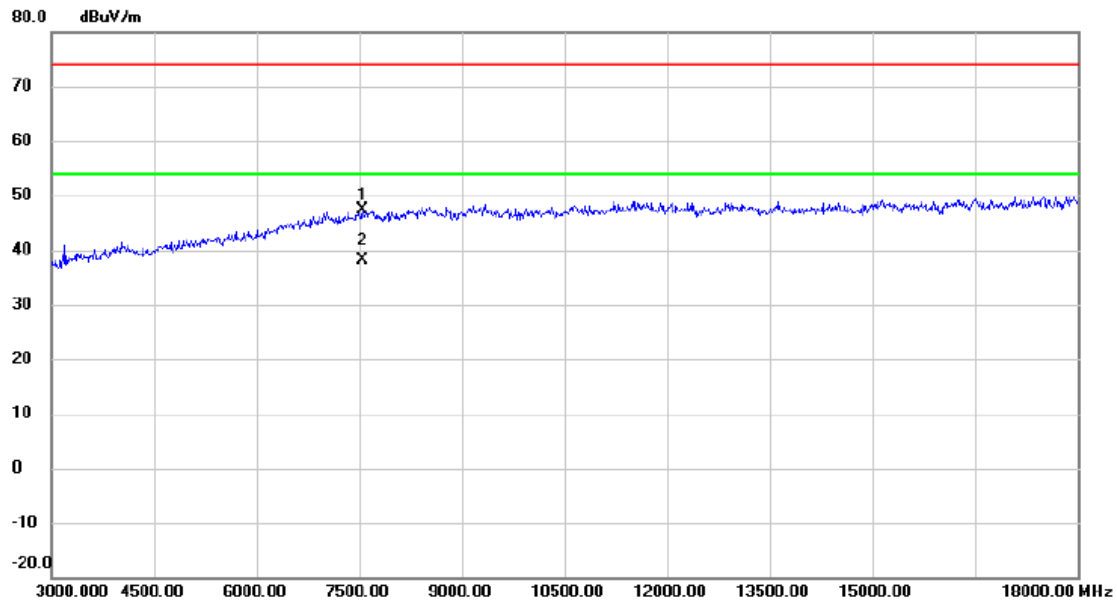


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7545.000     | 37.72                    | 9.56                    | 47.28                      | 74.00           | -26.72       | peak     |         |
| 2   | *   | 7545.000     | 28.46                    | 9.56                    | 38.02                      | 54.00           | -15.98       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2478 MHz \_CH37\_UHD 2M 8DPSK

## Horizontal

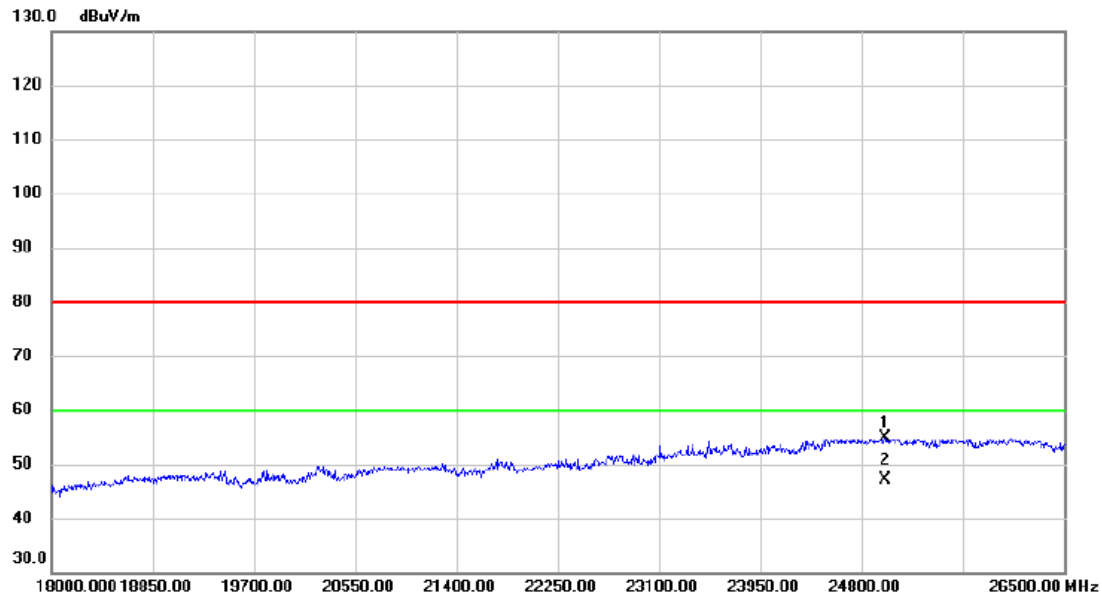


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 24995.50     | 24.28                    | 30.53                   | 54.81                      | 80.00           | -25.19       | peak     |         |
| 2   | *   | 24995.50     | 16.51                    | 30.53                   | 47.04                      | 60.00           | -12.96       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 4M  $\pi/4$ -DQPSK

## Vertical

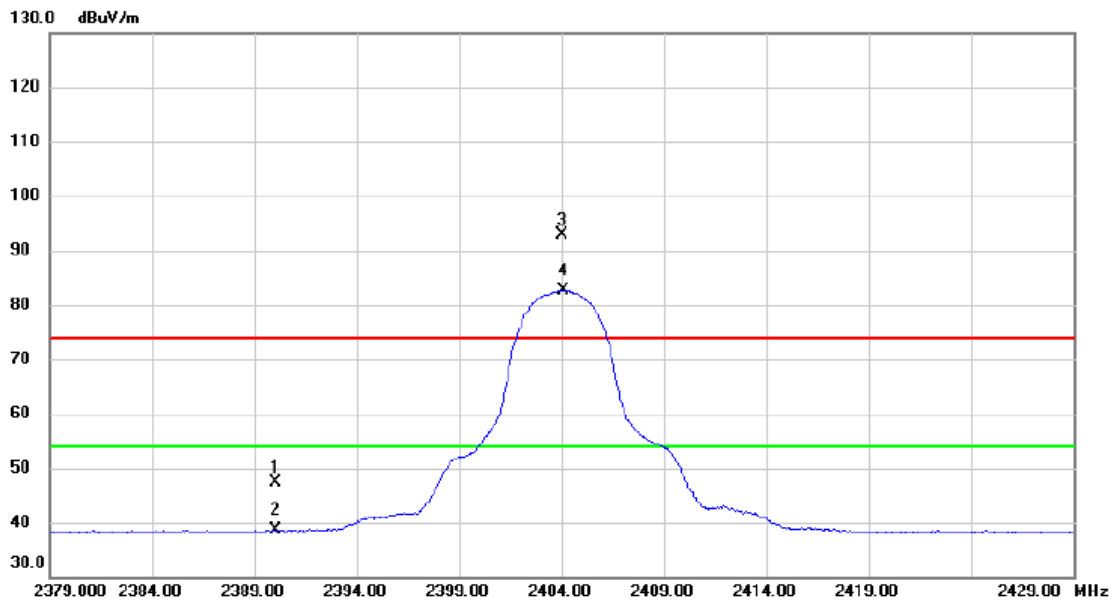

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 2390.000     | 40.44                    | 6.89                    | 47.33                      | 74.00           | -26.67       | peak     |          |
| 2   |     | 2390.000     | 31.70                    | 6.89                    | 38.59                      | 54.00           | -15.41       | AVG      |          |
| 3   | X   | 2404.000     | 86.11                    | 6.88                    | 92.99                      | 74.00           | 18.99        | peak     | No Limit |
| 4   | *   | 2404.100     | 75.77                    | 6.88                    | 82.65                      | 54.00           | 28.65        | AVG      | No Limit |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 4M  $\pi/4$ -DQPSK

## Vertical

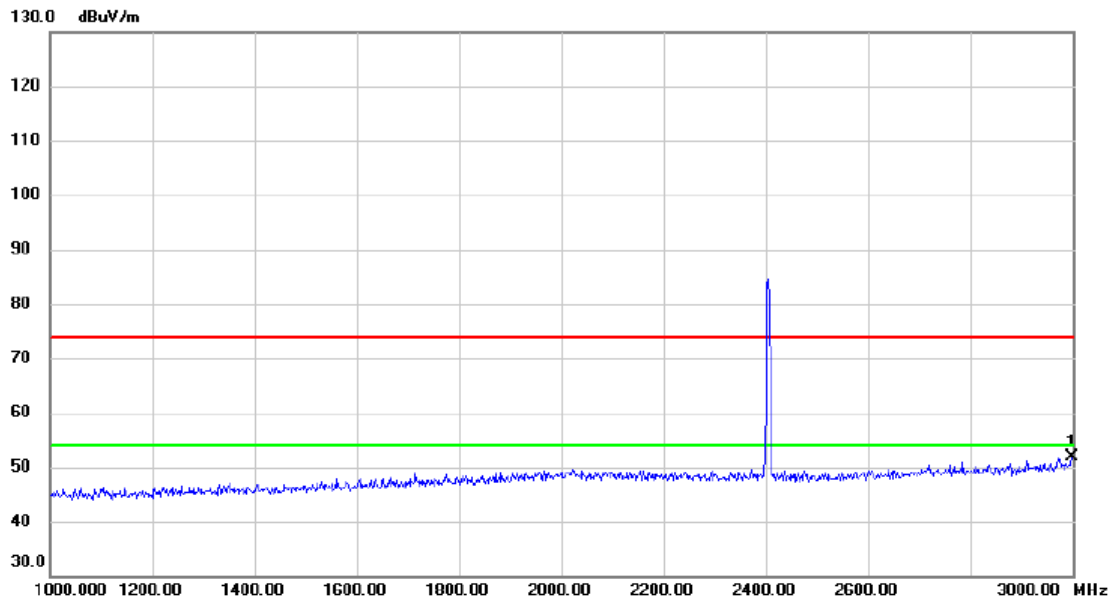


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 2998.000     | 42.44                    | 9.39                    | 51.83                      | 74.00           | -22.17       | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 4M  $\pi/4$ -DQPSK

## Vertical

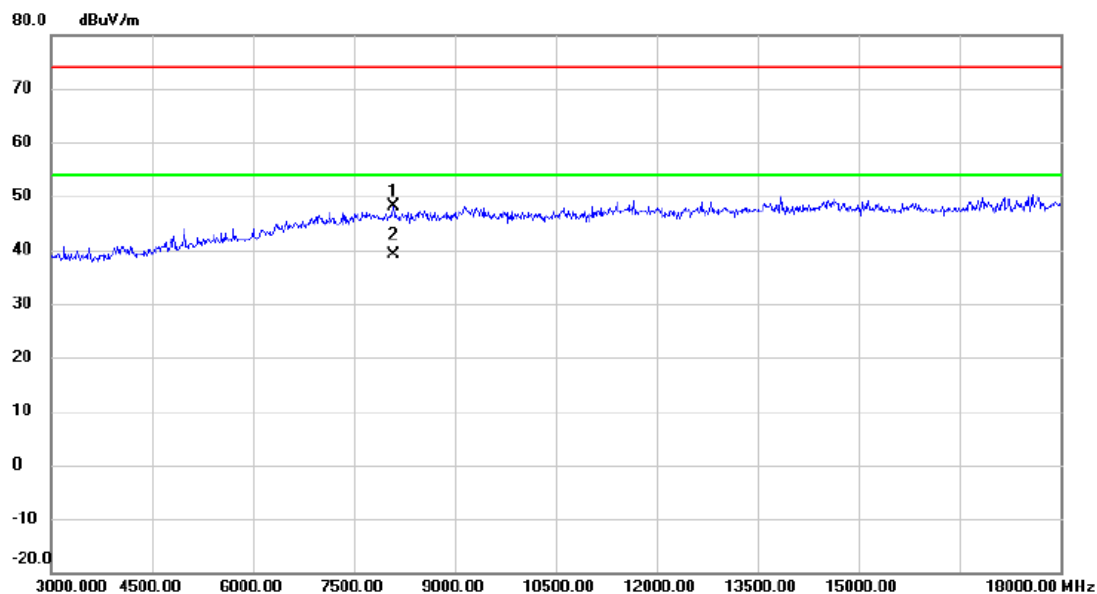


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8085.000     | 38.56                    | 9.54                    | 48.10                      | 74.00           | -25.90       | peak     |         |
| 2   | *   | 8085.000     | 29.48                    | 9.54                    | 39.02                      | 54.00           | -14.98       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 4M  $\pi/4$ -DQPSK

## Vertical

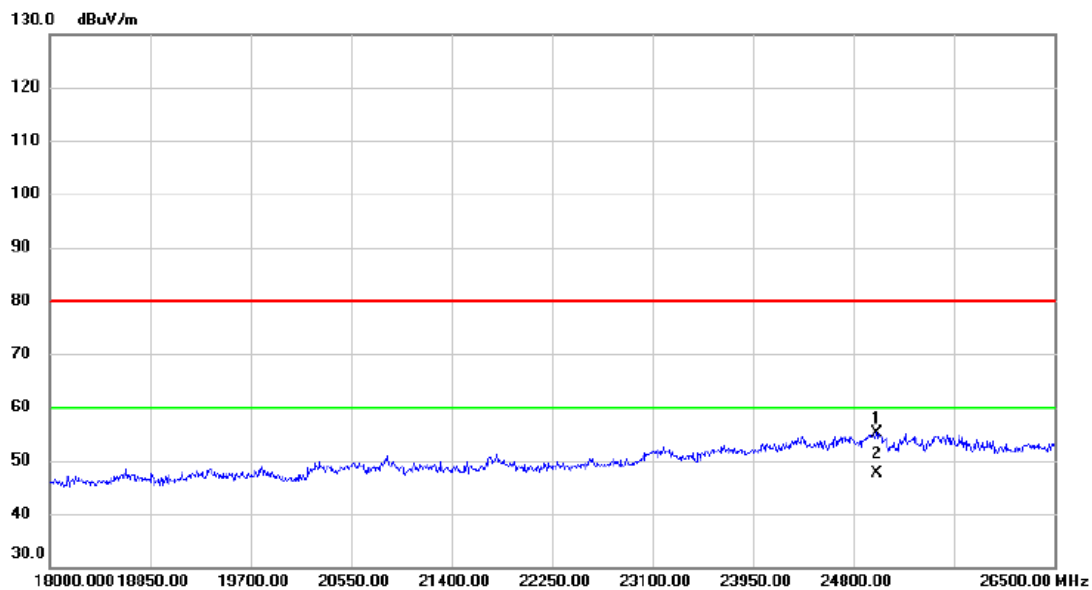


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 24995.50     | 24.72                    | 30.53                   | 55.25                      | 80.00           | -24.75       | peak     |         |
| 2   | *   | 24995.50     | 17.20                    | 30.53                   | 47.73                      | 60.00           | -12.27       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 4M  $\pi/4$ -DQPSK

## Horizontal

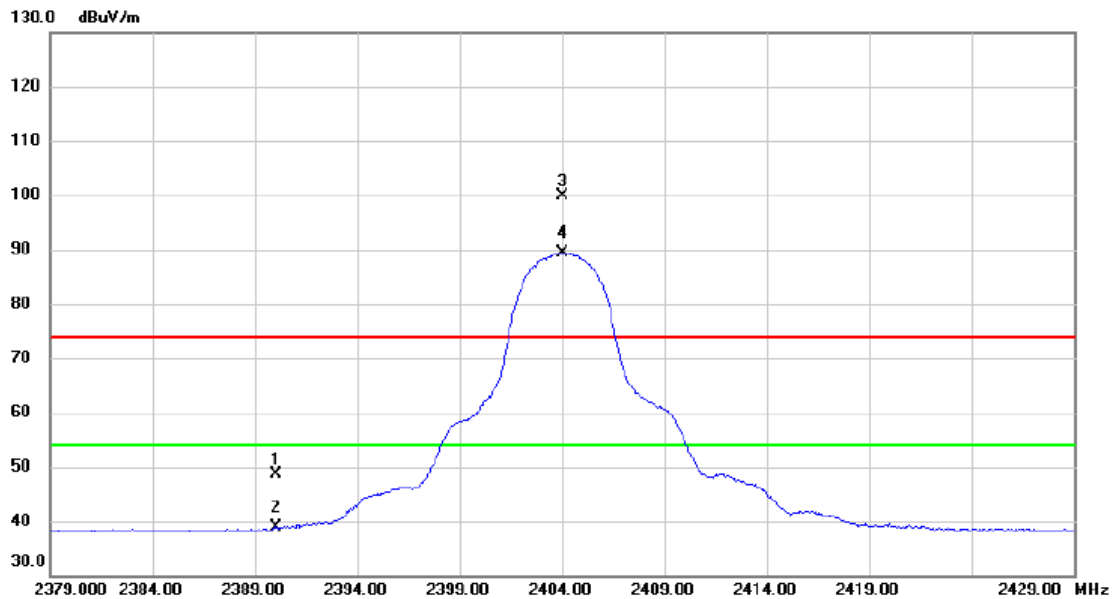


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 2390.000     | 41.82                    | 6.89                    | 48.71                      | 74.00           | -25.29       | peak     |          |
| 2   |     | 2390.000     | 32.02                    | 6.89                    | 38.91                      | 54.00           | -15.09       | AVG      |          |
| 3   | X   | 2404.000     | 92.99                    | 6.88                    | 99.87                      | 74.00           | 25.87        | peak     | No Limit |
| 4   | *   | 2404.000     | 82.57                    | 6.88                    | 89.45                      | 54.00           | 35.45        | AVG      | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 4M  $\pi/4$ -DQPSK

## Horizontal

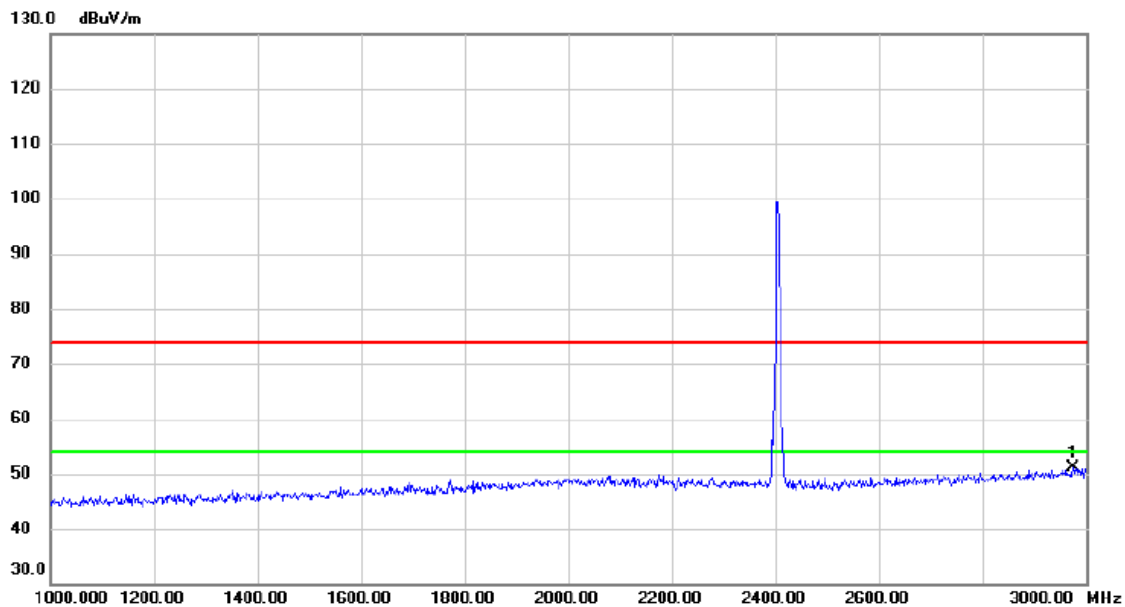


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2974.000 | 41.80         | 9.26           | 51.06       | 74.00  | -22.94 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 4M  $\pi/4$ -DQPSK

## Horizontal

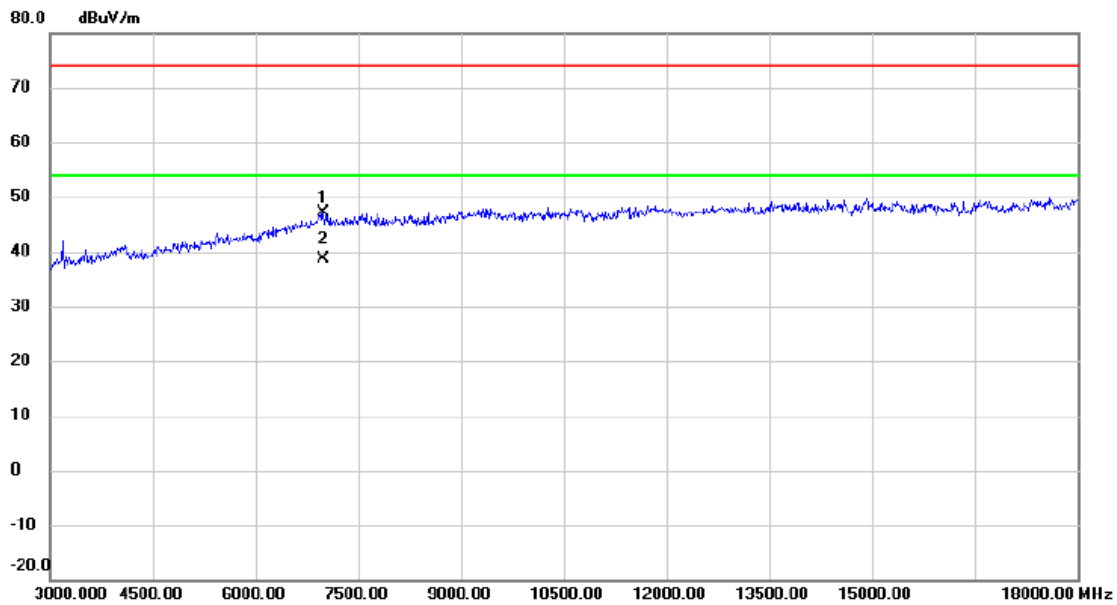


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 6990.000     | 38.25                    | 8.85                    | 47.10                      | 74.00           | -26.90       | peak     |         |
| 2   | *   | 6990.000     | 29.78                    | 8.85                    | 38.63                      | 54.00           | -15.37       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2404 MHz \_CH00\_UHD 4M  $\pi/4$ -DQPSK

## Horizontal

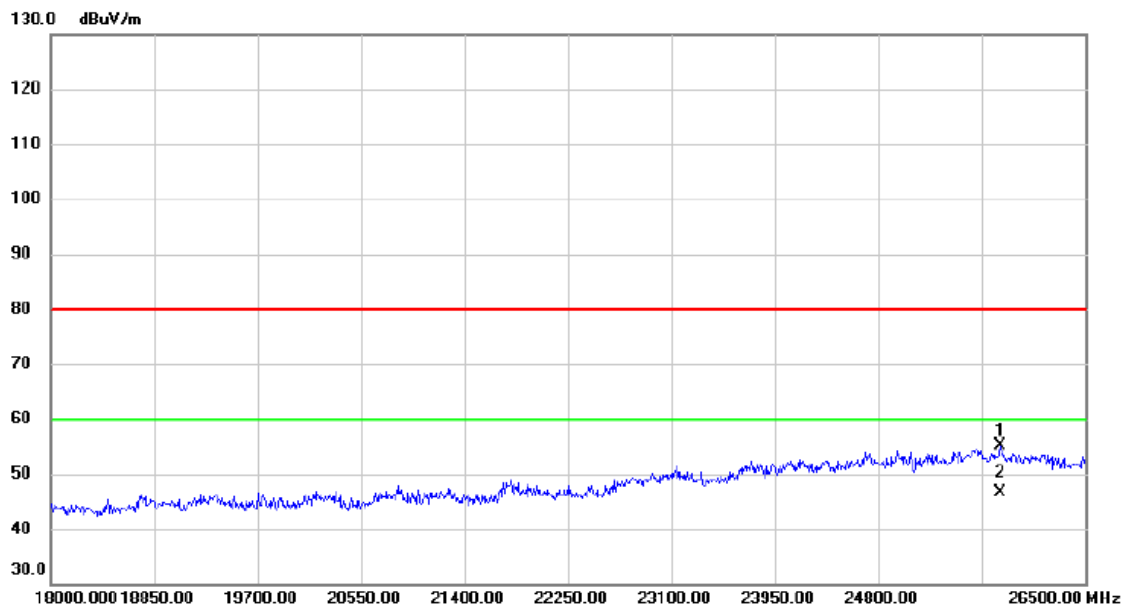


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 25803.00     | 24.81                    | 30.28                   | 55.09                      | 80.00           | -24.91       | peak     |         |
| 2   | *   | 25803.00     | 16.23                    | 30.28                   | 46.51                      | 60.00           | -13.49       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 4M  $\pi/4$ -DQPSK

## Vertical

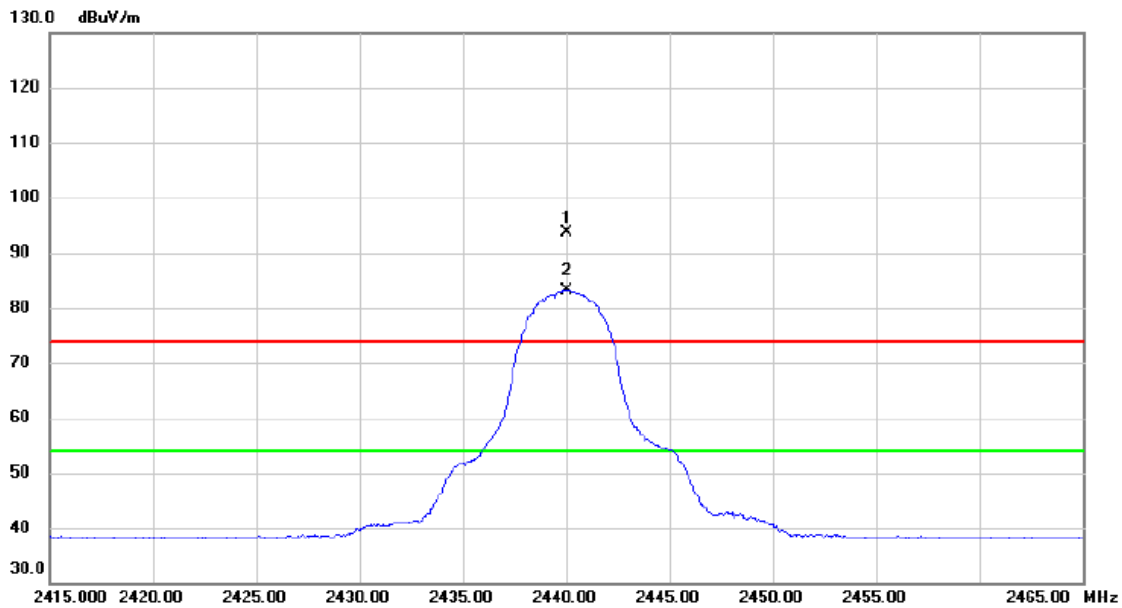

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 2440.000     | 86.86                    | 6.84                    | 93.70                      | 74.00           | 19.70        | peak     | No Limit |
| 2   | *   | 2440.050     | 76.31                    | 6.84                    | 83.15                      | 54.00           | 29.15        | AVG      | No Limit |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 4M  $\pi/4$ -DQPSK

## Vertical

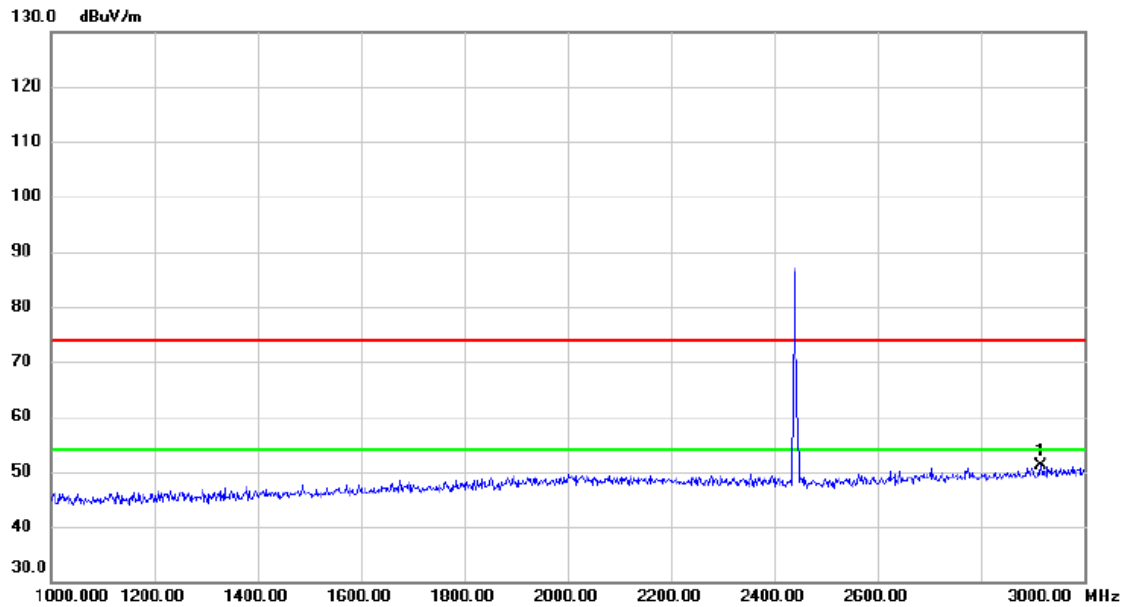


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 2916.000     | 42.13                    | 8.96                    | 51.09                      | 74.00           | -22.91       | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 4M  $\pi/4$ -DQPSK

## Vertical

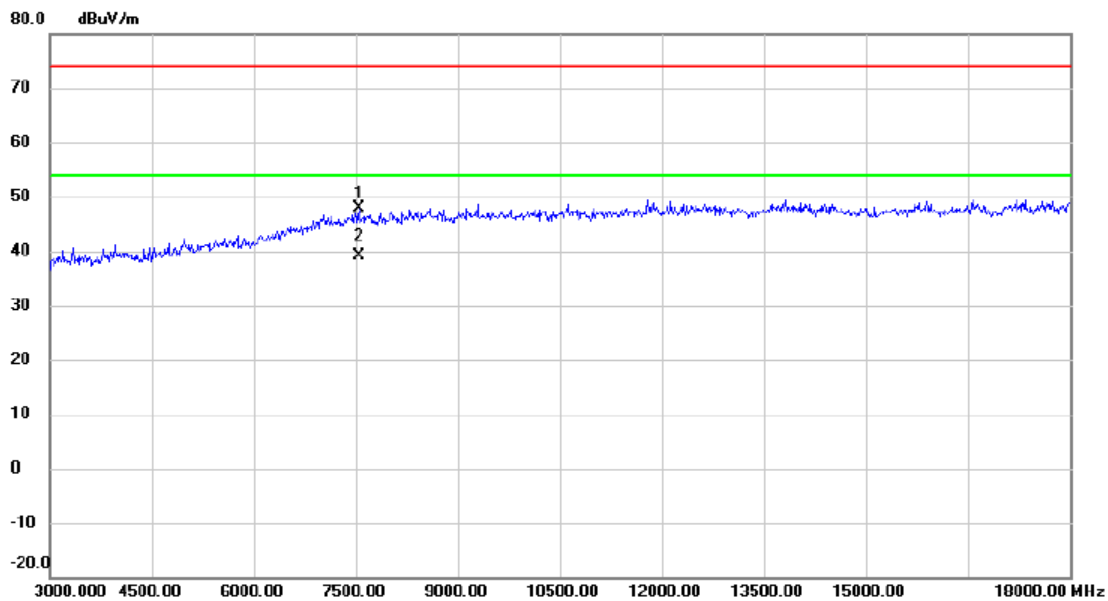


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7545.000     | 38.33                    | 9.56                    | 47.89                      | 74.00           | -26.11       | peak     |         |
| 2   | *   | 7545.000     | 29.65                    | 9.56                    | 39.21                      | 54.00           | -14.79       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 4M  $\pi/4$ -DQPSK

## Vertical

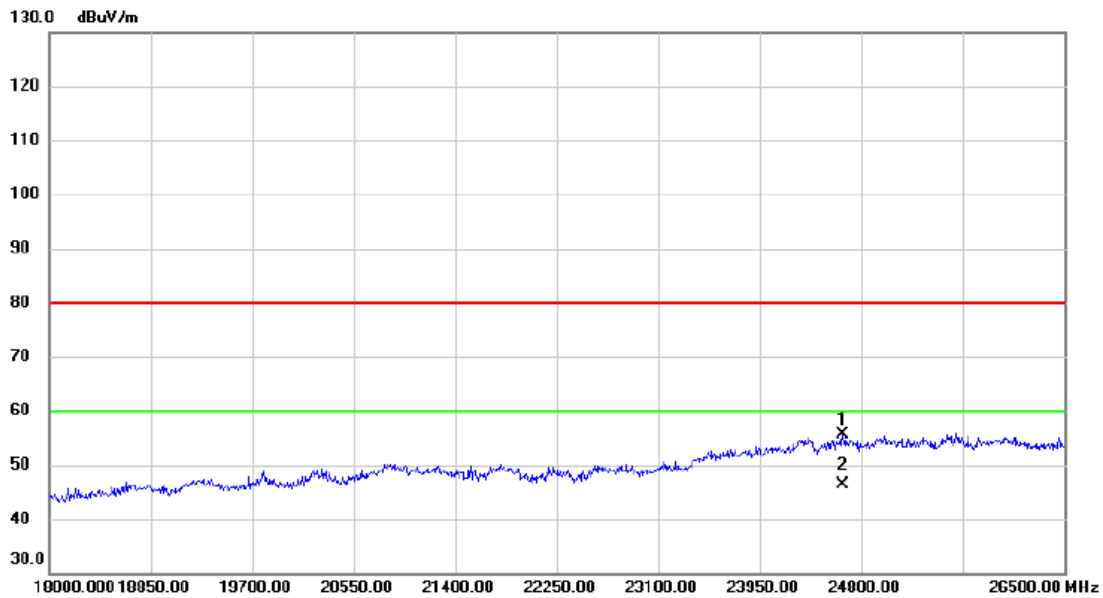


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 24647.00 | 25.67         | 30.05          | 55.72       | 80.00  | -24.28 | peak     |         |
| 2   | *   | 24647.00 | 16.29         | 30.05          | 46.34       | 60.00  | -13.66 | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 4M  $\pi/4$ -DQPSK

## Horizontal

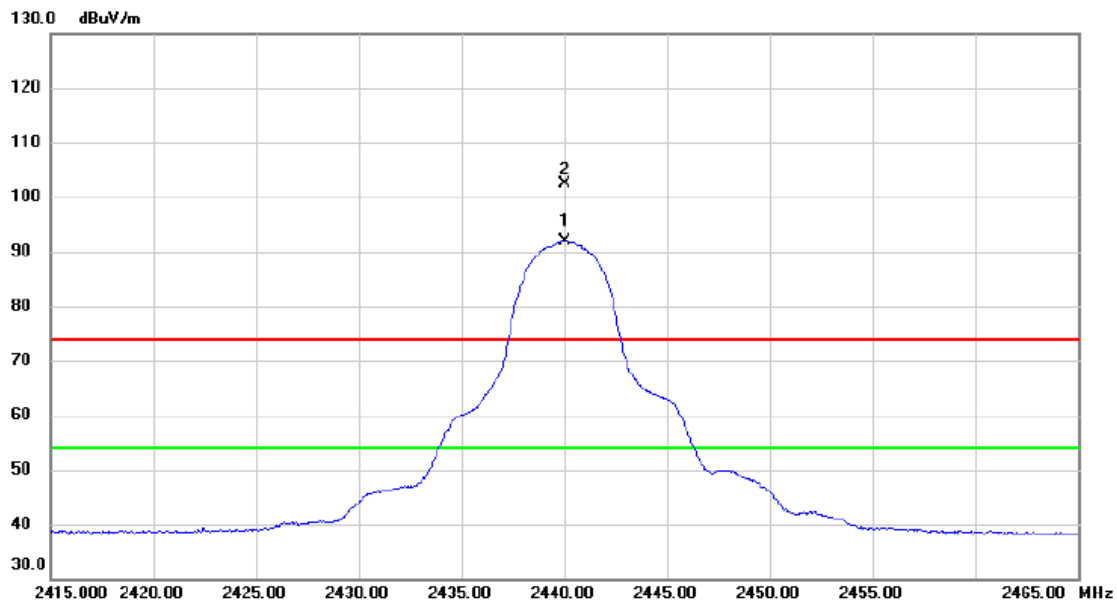


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment  |
| 1   | *   | 2440.000 | 85.05         | 6.84           | 91.89       | 54.00  | 37.89  | AVG      | No Limit |
| 2   | X   | 2440.050 | 95.45         | 6.84           | 102.29      | 74.00  | 28.29  | peak     | No Limit |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 4M  $\pi/4$ -DQPSK

## Horizontal

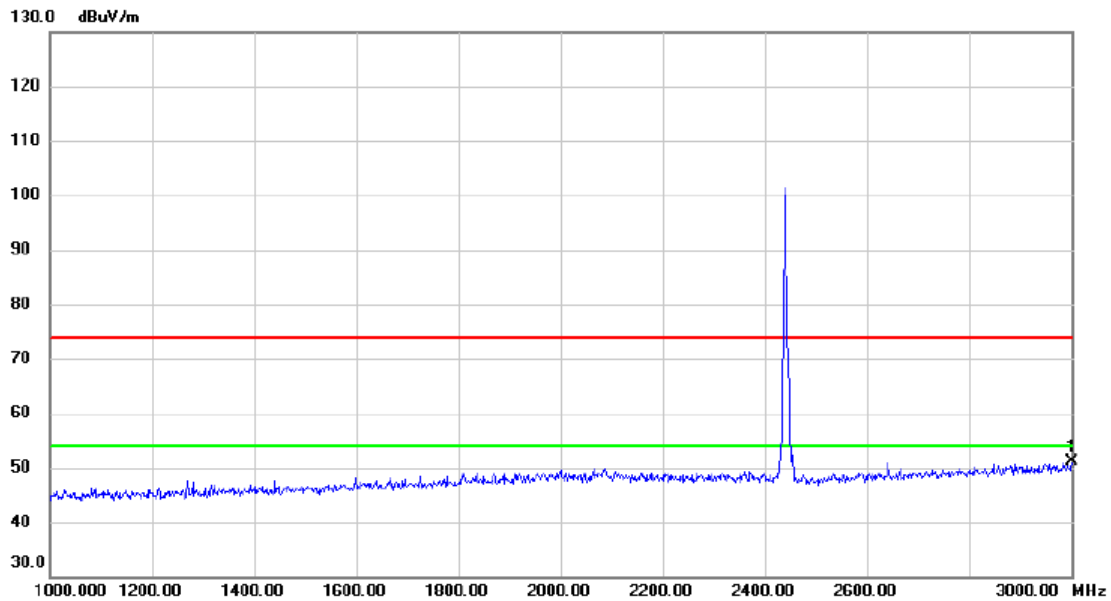


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 3000.000     | 41.76                    | 9.40                    | 51.16                      | 74.00           | -22.84       | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|            |                                         |
|------------|-----------------------------------------|
| Test Mode: | TX 2440 MHz _CH18_UHD 4M $\pi/4$ -DQPSK |
|------------|-----------------------------------------|

## Horizontal

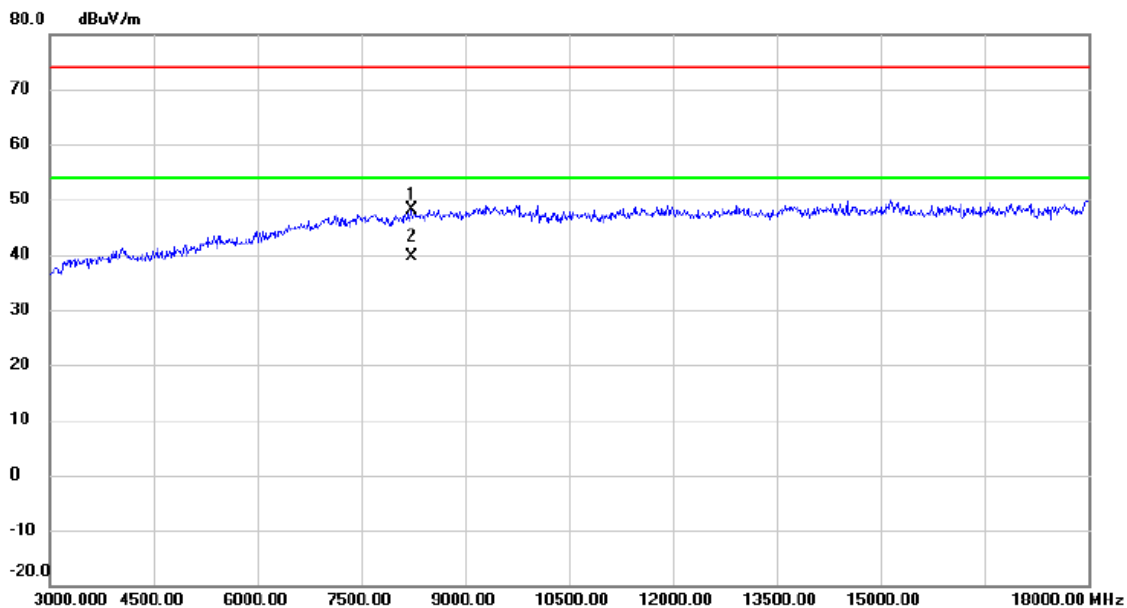

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8220.000     | 38.47                    | 9.73                    | 48.20                      | 74.00           | -25.80       | peak     |         |
| 2   | *   | 8220.000     | 29.78                    | 9.73                    | 39.51                      | 54.00           | -14.49       | AVG      |         |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2440 MHz \_CH18\_UHD 4M  $\pi/4$ -DQPSK

## Horizontal

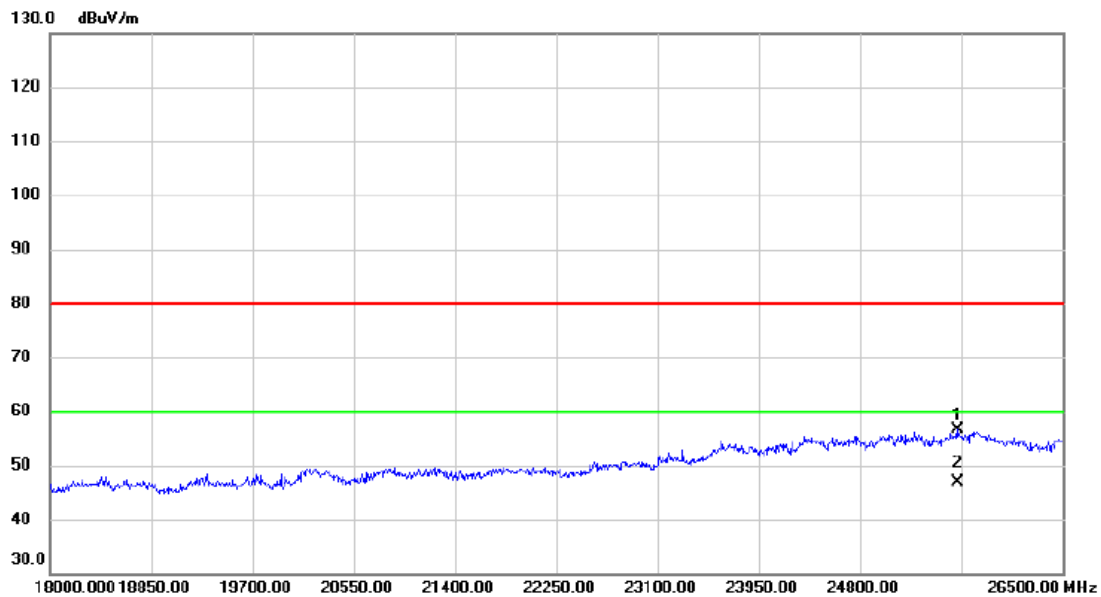


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 25616.00 | 26.44         | 30.15          | 56.59       | 80.00  | -23.41 | peak     |         |
| 2   | *   | 25616.00 | 16.84         | 30.15          | 46.99       | 60.00  | -13.01 | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2476 MHz\_CH36\_UHD 4M  $\pi/4$ -DQPSK

## Vertical

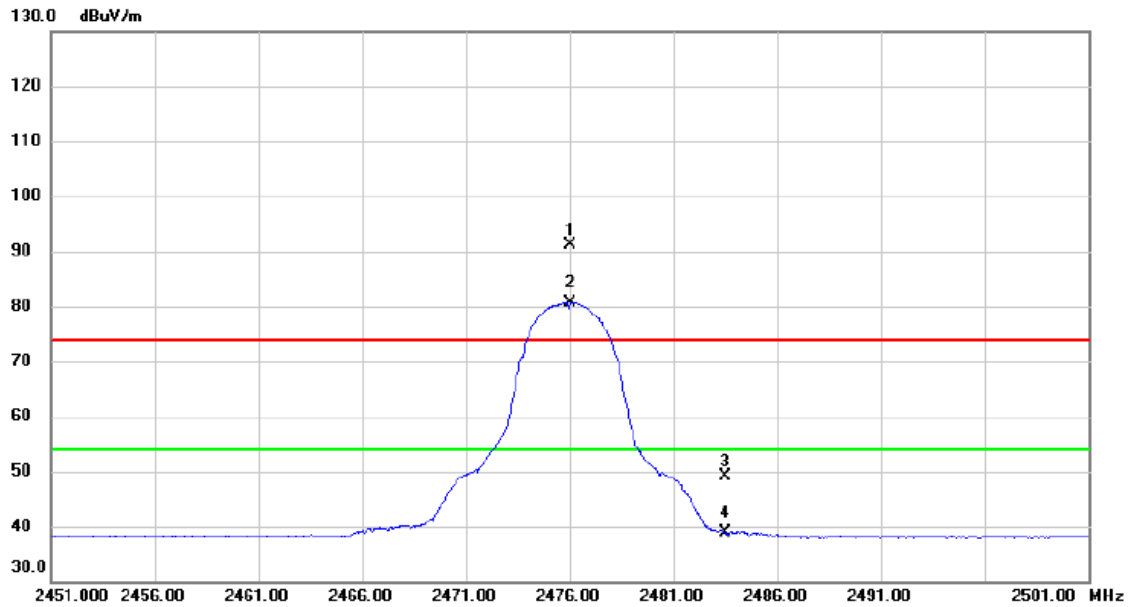

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 2476.000     | 84.26                    | 6.80                    | 91.06                      | 74.00           | 17.06        | peak     | No Limit |
| 2   | *   | 2476.050     | 73.94                    | 6.80                    | 80.74                      | 54.00           | 26.74        | AVG      | No Limit |
| 3   |     | 2483.500     | 42.29                    | 6.80                    | 49.09                      | 74.00           | -24.91       | peak     |          |
| 4   |     | 2483.500     | 32.19                    | 6.80                    | 38.99                      | 54.00           | -15.01       | AVG      |          |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2476 MHz\_CH36\_UHD 4M  $\pi/4$ -DQPSK

## Vertical

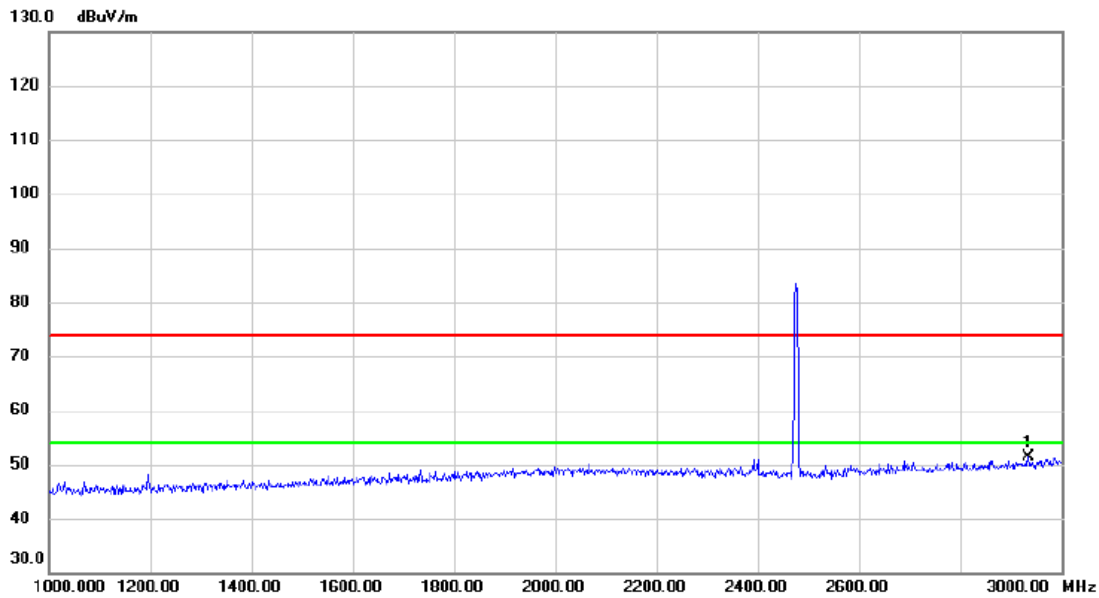


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 2934.000 | 42.28         | 9.05           | 51.33        | 74.00  | -22.67 | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2476 MHz\_CH36\_UHD 4M  $\pi/4$ -DQPSK

## Vertical

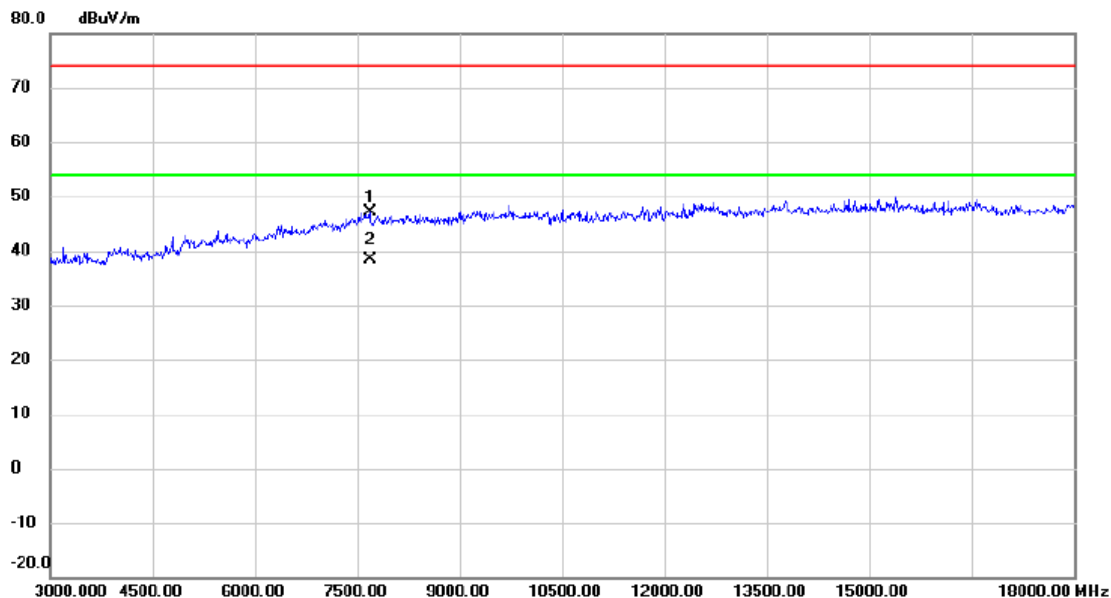


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7680.000     | 37.69                    | 9.53                    | 47.22                      | 74.00           | -26.78       | peak     |         |
| 2   | *   | 7680.000     | 28.79                    | 9.53                    | 38.32                      | 54.00           | -15.68       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2476 MHz\_CH36\_UHD 4M  $\pi/4$ -DQPSK

## Vertical

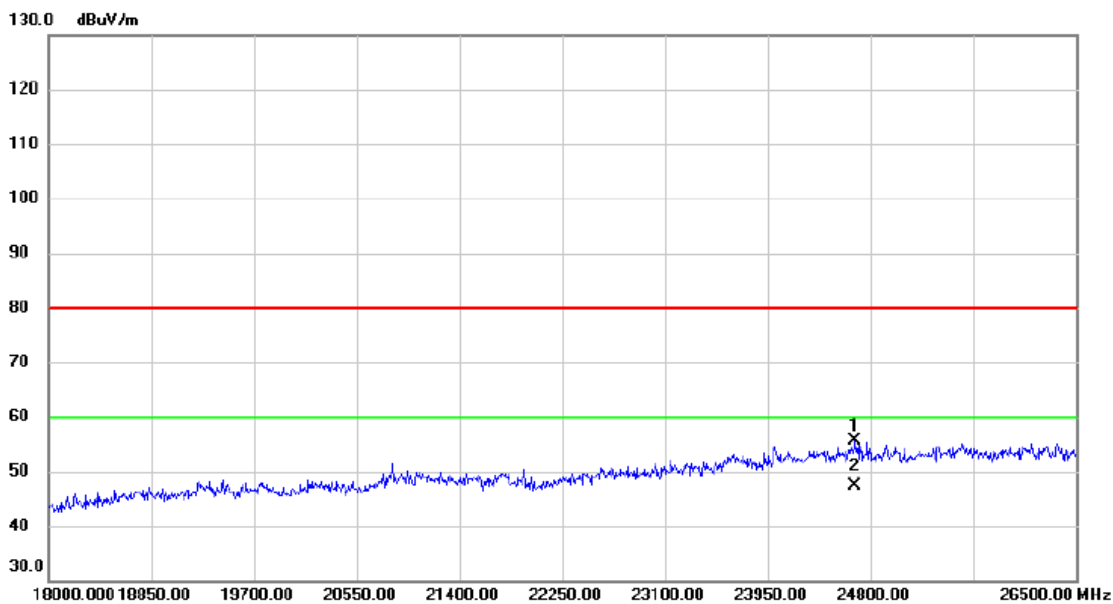


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 24672.50     | 25.55                    | 30.07                   | 55.62                      | 80.00           | -24.38       | peak     |         |
| 2   | *   | 24672.50     | 17.42                    | 30.07                   | 47.49                      | 60.00           | -12.51       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2476 MHz\_CH36\_UHD 4M  $\pi/4$ -DQPSK

## Horizontal

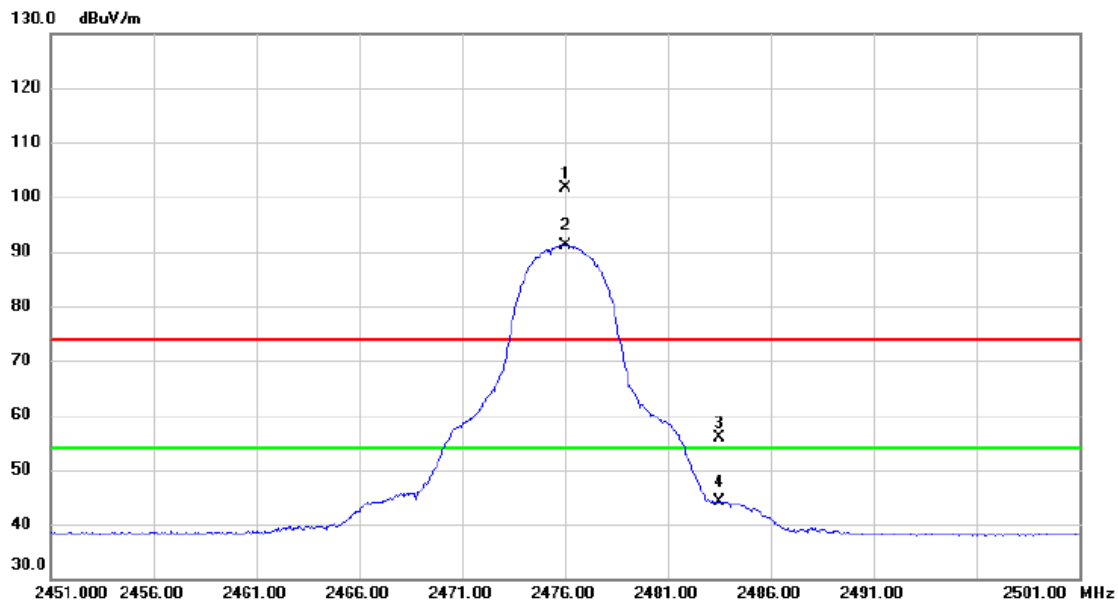


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   | X   | 2476.000     | 94.77                    | 6.80                    | 101.57                     | 74.00           | 27.57        | peak     | No Limit |
| 2   | *   | 2476.050     | 84.45                    | 6.80                    | 91.25                      | 54.00           | 37.25        | AVG      | No Limit |
| 3   |     | 2483.500     | 49.04                    | 6.80                    | 55.84                      | 74.00           | -18.16       | peak     |          |
| 4   |     | 2483.500     | 37.31                    | 6.80                    | 44.11                      | 54.00           | -9.89        | AVG      |          |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2476 MHz\_CH36\_UHD 4M  $\pi/4$ -DQPSK

## Horizontal

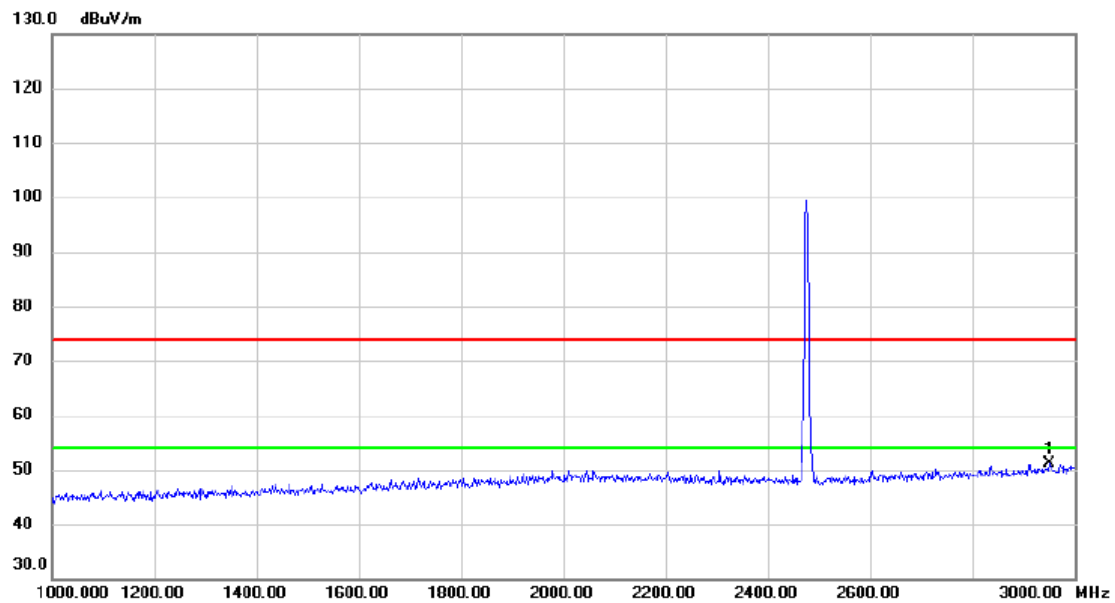


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 2950.000     | 41.95                    | 9.14                    | 51.09                      | 74.00           | -22.91       | peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2476 MHz\_CH36\_UHD 4M  $\pi/4$ -DQPSK

## Horizontal

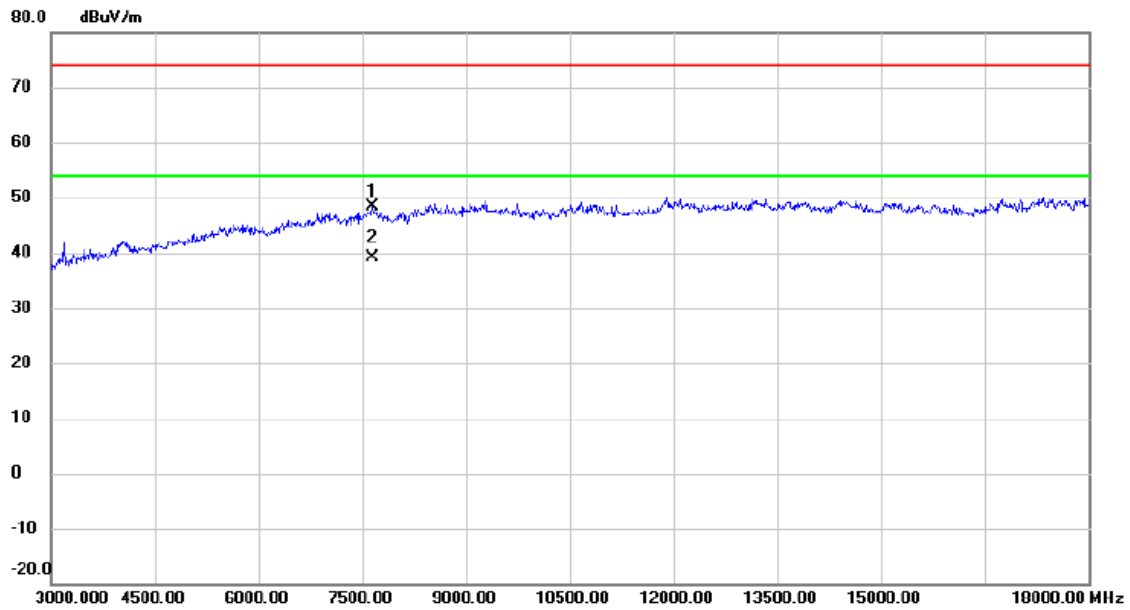


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7650.000     | 38.79                    | 9.54                    | 48.33                      | 74.00           | -25.67       | peak     |         |
| 2   | *   | 7650.000     | 29.49                    | 9.54                    | 39.03                      | 54.00           | -14.97       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2476 MHz\_CH36\_UHD 4M  $\pi/4$ -DQPSK

## Horizontal

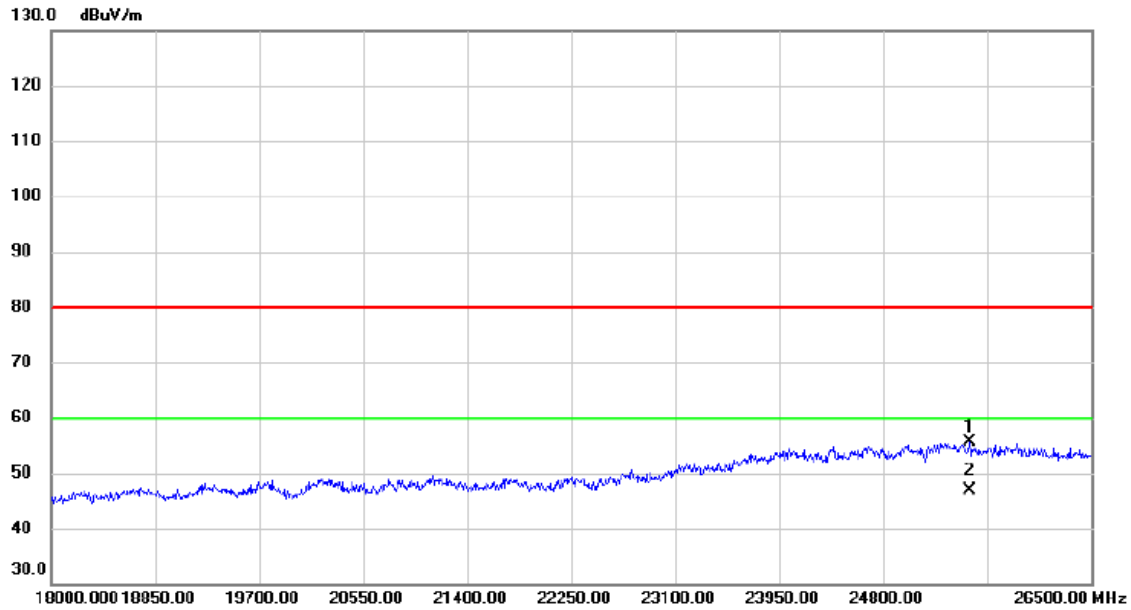

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 25505.50     | 25.55                    | 30.08                   | 55.63                      | 80.00           | -24.37       | peak     |         |
| 2   | *   | 25505.50     | 16.68                    | 30.08                   | 46.76                      | 60.00           | -13.24       | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.